

# RF TEST REPORT



Report No.: 17070605-FCC-R2

Supersede Report No.: N/A

Applicant	Power Idea Technology (Shenzhen) Co., Ltd.	
Product Name	GSM Digital Mobile Phone	
Model No.	RG129	
Serial No.	N/A	
Test Standard	FCC Part 15.247: 2016, ANSI C63.10: 2013	
Test Date	July 21 to August 23, 2017	
Issue Date	August 24, 2017	
Test Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Equipment complied with the specification <input checked="" type="checkbox"/>		
Equipment did not comply with the specification <input type="checkbox"/>		
Loren Luo	David Huang	
Loren Luo Test Engineer	David Huang Checked By	
This test report may be reproduced in full only		
Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: [China@siemic.com.cn](mailto:China@siemic.com.cn)

## Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	17070605-FCC-R2
Page	3 of 59

---

This page has been left blank intentionally.

## CONTENTS

1. REPORT REVISION HISTORY .....	5
2. CUSTOMER INFORMATION .....	5
3. TEST SITE INFORMATION.....	6
4. EQUIPMENT UNDER TEST (EUT) INFORMATION .....	7
5. TEST SUMMARY .....	9
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS .....	10
6.1 ANTENNA REQUIREMENT.....	10
6.2 CHANNEL SEPARATION .....	11
6.3 20DB BANDWIDTH.....	14
6.4 PEAK OUTPUT POWER.....	17
6.5 NUMBER OF HOPPING CHANNEL.....	20
6.6 TIME OF OCCUPANCY (DWELL TIME) .....	22
6.7 BAND EDGE & RESTRICTED BAND .....	25
6.8 AC POWER LINE CONDUCTED EMISSIONS.....	29
6.9 RADIATED EMISSIONS & RESTRICTED BAND .....	35
ANNEX A. TEST INSTRUMENT.....	42
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	43
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	54
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST .....	58
ANNEX E. DECLARATION OF SIMILARITY .....	59

## 1. Report Revision History

Report No.	Report Version	Description	Issue Date
17070605-FCC-R2	NONE	Original	August 24, 2017

## 2. Customer information

Applicant Name	Power Idea Technology (Shenzhen) Co., Ltd.
Applicant Add	4th Floor, A Section , Languang Science&technology Building , No.7 Xinxi RD , Hi-Tech Industrial Park North , Nanshan District , ShenZhen , P.R.C.
Manufacturer	Power Idea Technology (Shenzhen) Co., Ltd.
Manufacturer Add	4th Floor, A Section , Languang Science&technology Building , No.7 Xinxi RD , Hi-Tech Industrial Park North , Nanshan District , ShenZhen , P.R.C.

### 3. Test site information

Test Lab A:

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	535293
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

Test Lab B:

Lab performing tests	SIEMIC (Nanjing-China) Laboratories
Lab Address	2-1 Longcang Avenue Yuhua Economic and Technology Development Park, Nanjing, China
FCC Test Site No.	694825
IC Test Site No.	4842B-1
Test Software	EZ_EMC(ver.lcp-03A1)

Note: We just perform Radiated Spurious Emission above 18GHz in the test Lab. B.

#### **4. Equipment under Test (EUT) Information**

Description of EUT: GSM Digital Mobile Phone

Main Model: RG129

Serial Model: N/A

Date EUT received: July 20, 2017

Test Date(s): July 21 to August 23, 2017

Equipment Category : DSS

GSM850: -2.02dBi

Antenna Gain: PCS1900: -0.11dBi

Bluetooth: -2.12dBi

Antenna Type: GSM: PIFA antenna  
BT: Monopole antenna

Type of Modulation: GSM / GPRS: GMSK  
Bluetooth: GFSK

GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz

RF Operating Frequency (ies): PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz

Bluetooth: 2402-2480 MHz

Max. Output Power: 0.337dBm

GSM 850: 124CH

Number of Channels: PCS1900: 299CH

Bluetooth: 79CH

Port: USB Port, Earphone Port

Adapter:

Model: STC-A22O501500USBA-Z

Input: AC100-240V~50/60Hz,200mA

Output: DC 5.0V,500mA

Input Power:

Battery

Model: BL100EI (ICP5/34/53)

Spec: 3.7V/800mAh(2.96Wh)

Limited charge voltage: 4.2V

Trade Name : N/A

FCC ID: ZLE-RG129

## 5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.247(a)(1)	Channel Separation	Compliance
§15.247(a)(1)	20 dB Bandwidth	Compliance
§15.247(b)(1)	Peak Output Power	Compliance
§15.247(a)(1)(iii)	Number of Hopping Channel	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(d)	Band Edge& Restricted Band	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions& Restricted Band	Compliance

### Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge& Restricted Band and Radiated Emissions& Restricted Band	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

## 6. Measurements, Examination And Derived Results

### 6.1 Antenna Requirement

#### Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### Antenna Connector Construction

The EUT has 2 antennas:

A permanently attached PIFA antenna for Bluetooth, the gain is -2.12dBi for Bluetooth.

A permanently attached PIFA antenna for GSM/PCS, the gain is -2.02dBi for GSM850, -0.11dBi for PCS1900.


**The antenna meets up with the ANTENNA REQUIREMENT.**

**Result:** Compliance.

## 6.2 Channel Separation

Temperature	24°C
Relative Humidity	51%
Atmospheric Pressure	1012mbar
Test date :	August 03, 2017
Tested By :	Loren Luo

### Requirement(s):

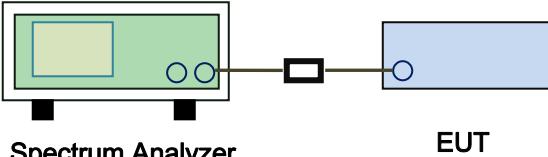Spec	Item	Requirement	Applicable
§ 15.247(a)(1)	a)	Channel Separation < 20dB BW and 20dB BW < 25KHz ; Channel Separation Limit=25KHz Chanel Separation < 20dB BW and 20dB BW > 25kHz ; Channel Separation Limit=2/3 20dB BW	<input checked="" type="checkbox"/>
Test Setup		 <b>Spectrum Analyzer</b> <b>EUT</b>	
Test Procedure		<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> <li>- The EUT must have its hopping function enabled</li> <li>- Span = wide enough to capture the peaks of two adjacent channels</li> <li>- Resolution (or IF) Bandwidth (RBW) <math>\geq</math> 1% of the span</li> <li>- Video (or Average) Bandwidth (VBW) <math>\geq</math> RBW</li> <li>- Sweep = auto</li> <li>- Detector function = peak</li> <li>- Trace = max hold</li> <li>- Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.</li> </ul>	


Remark		
Result	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
Test Data	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> N/A
Test Plot	<input checked="" type="checkbox"/> Yes (See below)	<input type="checkbox"/> N/A

### Channel Separation measurement result

Type/ Modulation	CH	CH Frequency (MHz)	CH Separation (MHz)	Limit (MHz)	Result
CH Separation GFSK	Low Channel	2402	1.005	0.695	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.005	0.691	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.005	0.688	Pass
	Adjacency Channel	2479			

## Test Plots


### Channel Separation measurement result

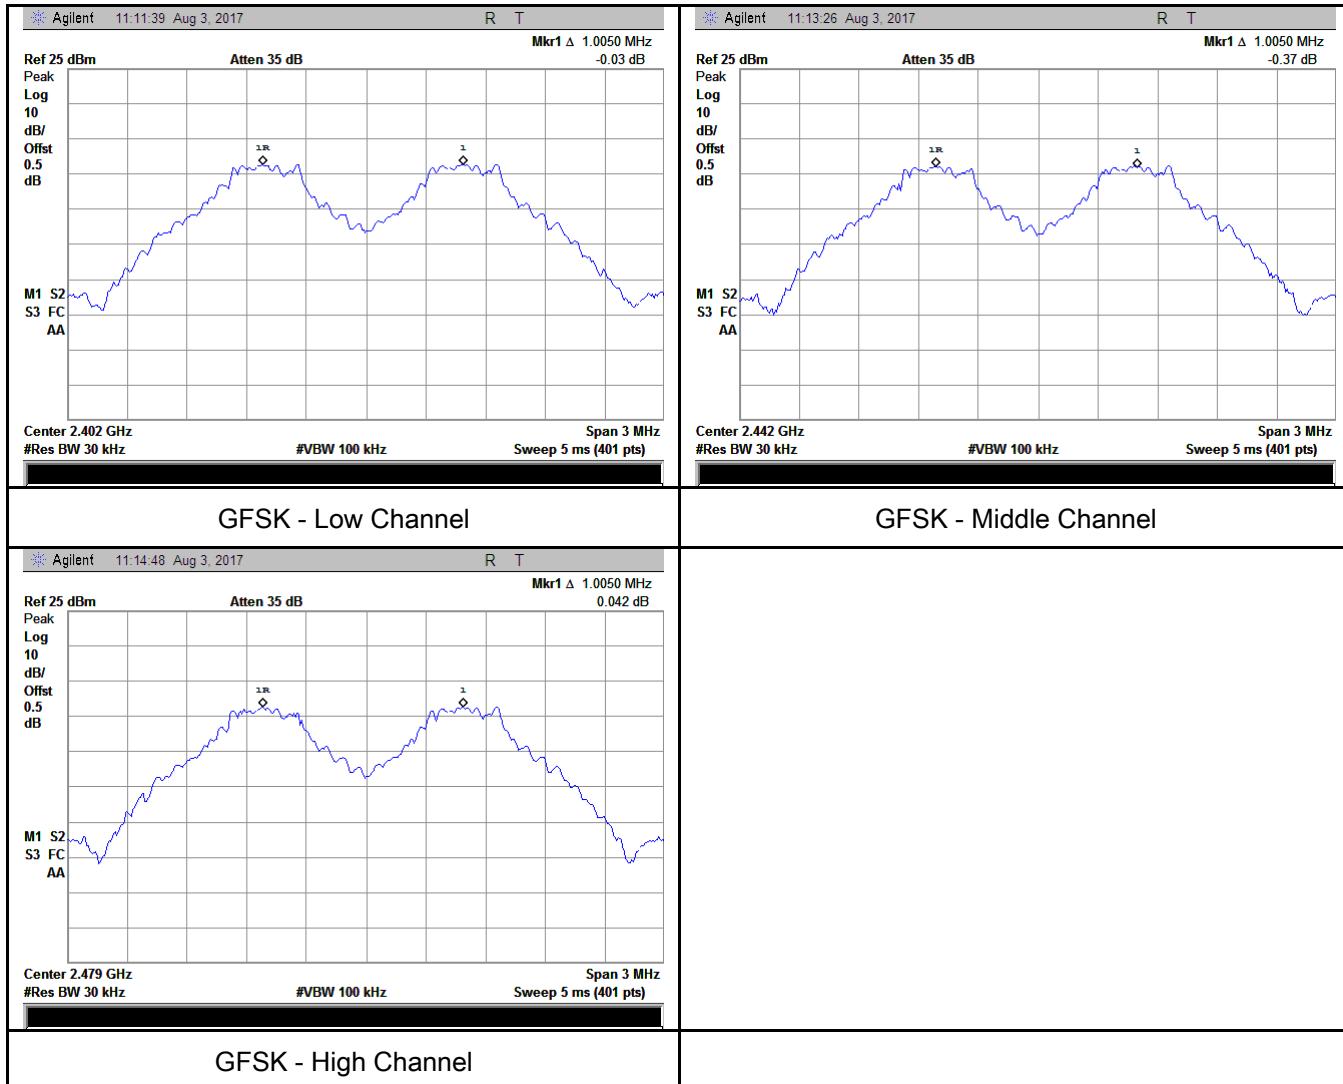

### 6.3 20dB Bandwidth

Temperature	24°C
Relative Humidity	51%
Atmospheric Pressure	1012mbar
Test date :	August 03, 2017
Tested By :	Loren Luo

#### Requirement(s):

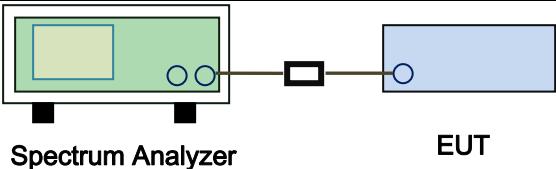Spec	Item	Requirement	Applicable
§15.247(a) (1)	a)	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> <li>- Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel</li> <li>- RBW <math>\geq</math> 1% of the 20 dB bandwidth</li> <li>- VBW <math>\geq</math> RBW</li> <li>- Sweep = auto</li> <li>- Detector function = peak</li> <li>- Trace = max hold.</li> <li>- The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference</li> </ul>		

	marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data  Yes  N/A


Test Plot  Yes (See below)  N/A

#### Measurement result

Modulation	CH	CH Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
GFSK	Low	2402	1.043	0.9048
	Mid	2441	1.036	0.8976
	High	2480	1.032	0.8982

## Test Plots


### 20dB Bandwidth measurement result

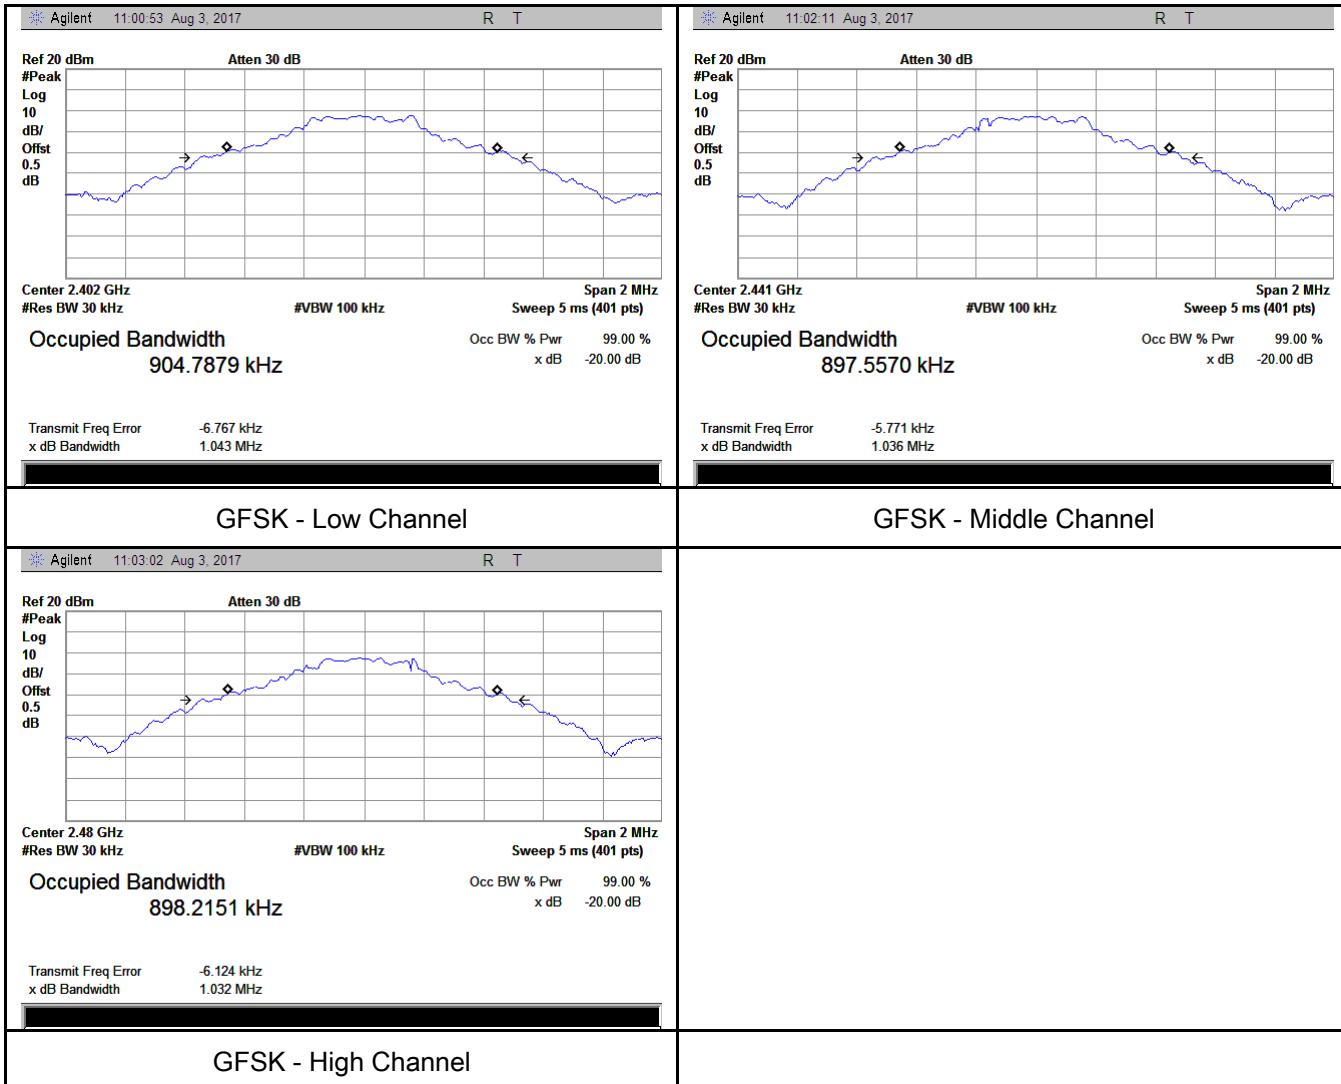

## 6.4 Peak Output Power

Temperature	24°C
Relative Humidity	51%
Atmospheric Pressure	1012mbar
Test date :	August 03, 2017
Tested By :	Loren Luo

### Requirement(s):

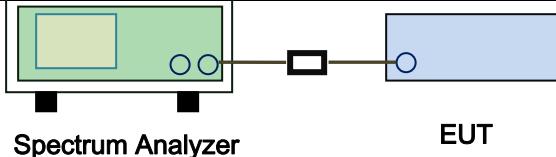Spec	Item	Requirement	Applicable
§15.247(b) (3)	a)	FHSS in 2400-2483.5MHz with $\geq$ 75 channels: $\leq$ 1 Watt	<input checked="" type="checkbox"/>
	b)	FHSS in 5725-5850MHz: $\leq$ 1 Watt	<input type="checkbox"/>
	c)	For all other FHSS in the 2400-2483.5MHz band: $\leq$ 0.125 Watt.	<input checked="" type="checkbox"/>
	d)	FHSS in 902-928MHz with $\geq$ 50 channels: $\leq$ 1 Watt	<input type="checkbox"/>
	e)	FHSS in 902-928MHz with $\geq$ 25 & $<$ 50 channels: $\leq$ 0.25 Watt	<input type="checkbox"/>
	f)	DTS in 902-928MHz, 2400-2483.5MHz: $\leq$ 1 Watt	<input type="checkbox"/>
Test Setup		 <b>Spectrum Analyzer</b> <b>EUT</b>	
Test Procedure		<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> <li>- Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel</li> <li>- RBW &gt; the 20 dB bandwidth of the emission being measured</li> <li>- VBW <math>\geq</math> RBW</li> <li>- Sweep = auto</li> <li>- Detector function = peak</li> <li>- Trace = max hold</li> <li>- Allow the trace to stabilize.</li> </ul>	

	<ul style="list-style-type: none"> <li>- Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power (see the note above regarding external attenuation and cable loss). The limit is specified in one of the subparagraphs of this Section. Submit this plot. A peak responding power meter may be used instead of a spectrum analyzer.</li> </ul>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data  Yes  N/A


Test Plot  Yes (See below)  N/A

#### Peak Output Power measurement result

Type	Modulation	CH	Frequency (MHz)	Conducted Power (dBm)	Limit (mW)	Result
Output power	GFSK	Low	2402	0.179	125	Pass
		Mid	2441	-0.091	125	Pass
		High	2480	0.337	125	Pass

## Test Plots


### Output Power measurement result

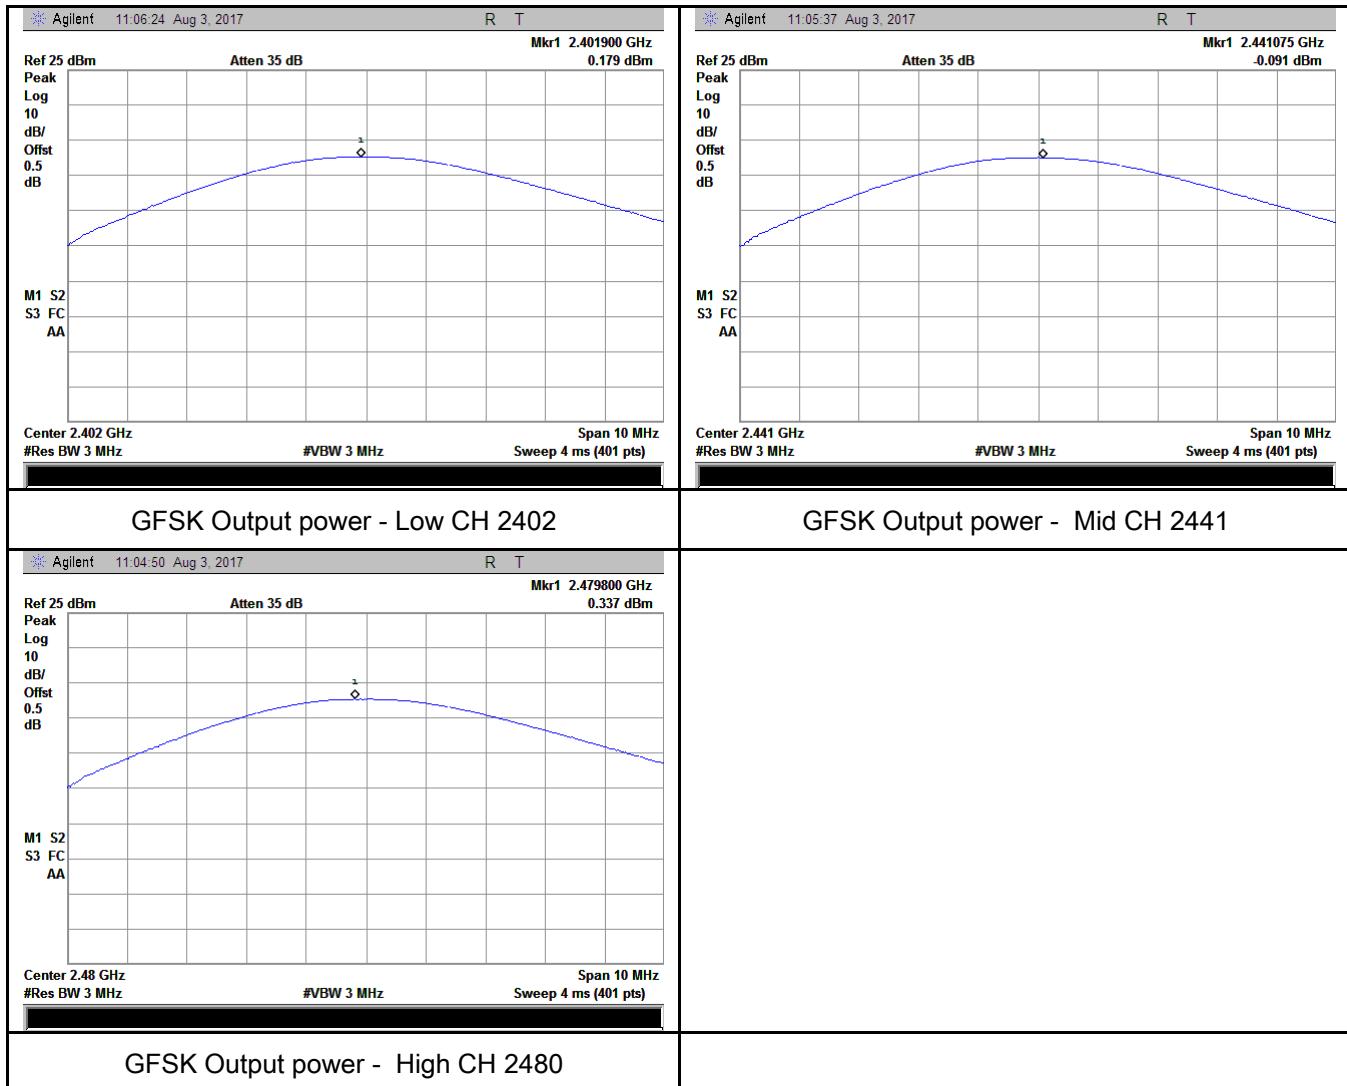

## 6.5 Number of Hopping Channel

Temperature	24°C
Relative Humidity	51%
Atmospheric Pressure	1012mbar
Test date :	August 03, 2017
Tested By :	Loren Luo

## Requirement(s):

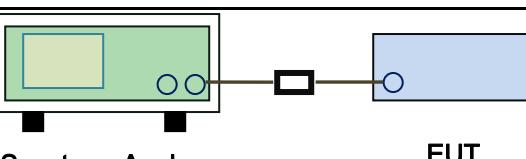
Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	FHSS in 2400-2483.5MHz $\geq$ 15 channels	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure		<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <p>The EUT must have its hopping function enabled.</p> <ul style="list-style-type: none"> <li>- Span = the frequency band of operation</li> <li>- RBW <math>\geq</math> 1% of the span</li> <li>- VBW <math>\geq</math> RBW</li> <li>- Sweep = auto</li> <li>- Detector function = peak</li> <li>- Trace = max hold</li> <li>- Allow trace to fully stabilize.</li> <li>- It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).</li> </ul>	
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		
Test Data	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> N/A		
Test Plot	<input checked="" type="checkbox"/> Yes (See below) <input type="checkbox"/> N/A		

### Number of Hopping Channel measurement result

Type	Modulation	Frequency Range	Number of Hopping Channel	Limit
Number of Hopping Channel	GFSK	2400-2483.5	79	15

### Test Plots


#### Number of Hopping Channels measurement result

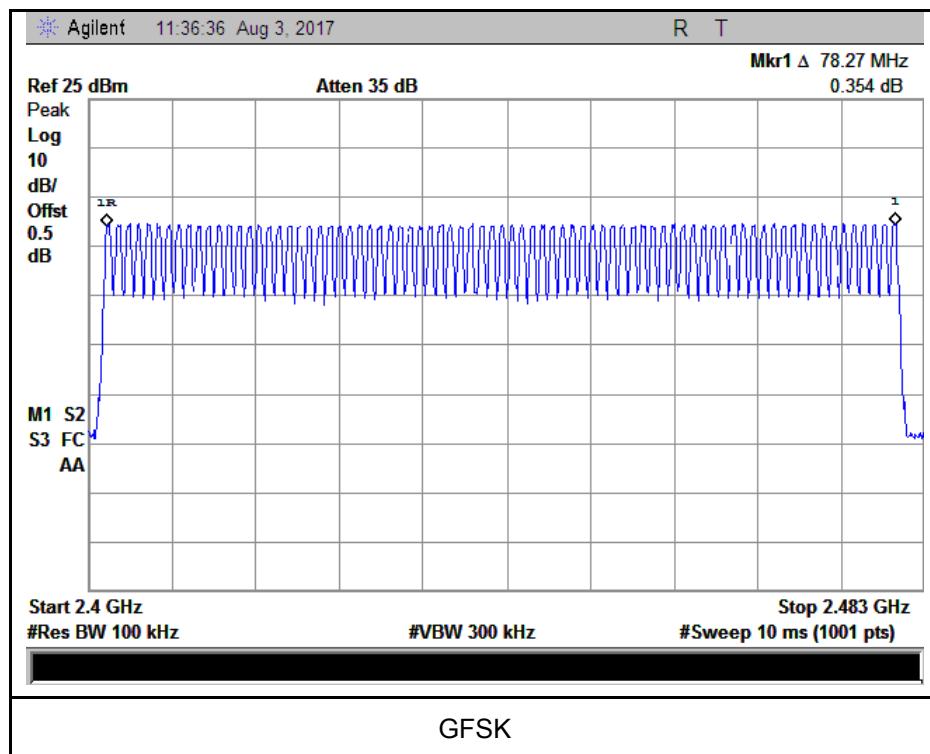

## 6.6 Time of Occupancy (Dwell Time)

Temperature	24°C
Relative Humidity	51%
Atmospheric Pressure	1012mbar
Test date :	August 03, 2017
Tested By :	Loren Luo

### Requirement(s):

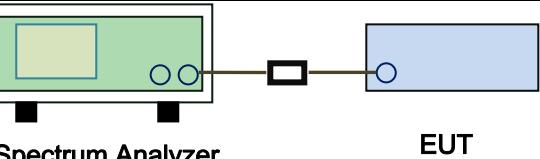Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	Dwell Time < 0.4s	<input checked="" type="checkbox"/>
Test Setup			
The test follows FCC Public Notice DA 00-705 Measurement Guidelines.			
<u>Use the following spectrum analyzer</u> <ul style="list-style-type: none"> <li>- Span = zero span, centered on a hopping channel</li> <li>- RBW = 1 MHz</li> <li>- VBW <math>\geq</math> RBW</li> <li>- Sweep = as necessary to capture the entire dwell time per hopping channel</li> <li>- Detector function = peak</li> <li>- Trace = max hold</li> <li>- use the marker-delta function to determine the dwell time</li> </ul>			
Test Procedure			
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

**Test Data**  Yes

N/A

**Test Plot**  Yes (See below)

N/A


## Dwell Time measurement result

Type	Modulation	CH	Pulse Width (ms)	Dwell Time (ms)	Limit (ms)	Result
Dwell Time	GFSK	Low	2.89	308.267	400	Pass
		Mid	2.90	309.333	400	Pass
		High	2.89	308.267	400	Pass

Note: Dwell time = Pulse Time (ms)  $\times$   $(1600 \div 6 \div 79) \times 31.6$

## Test Plots


### Dwell Time measurement result

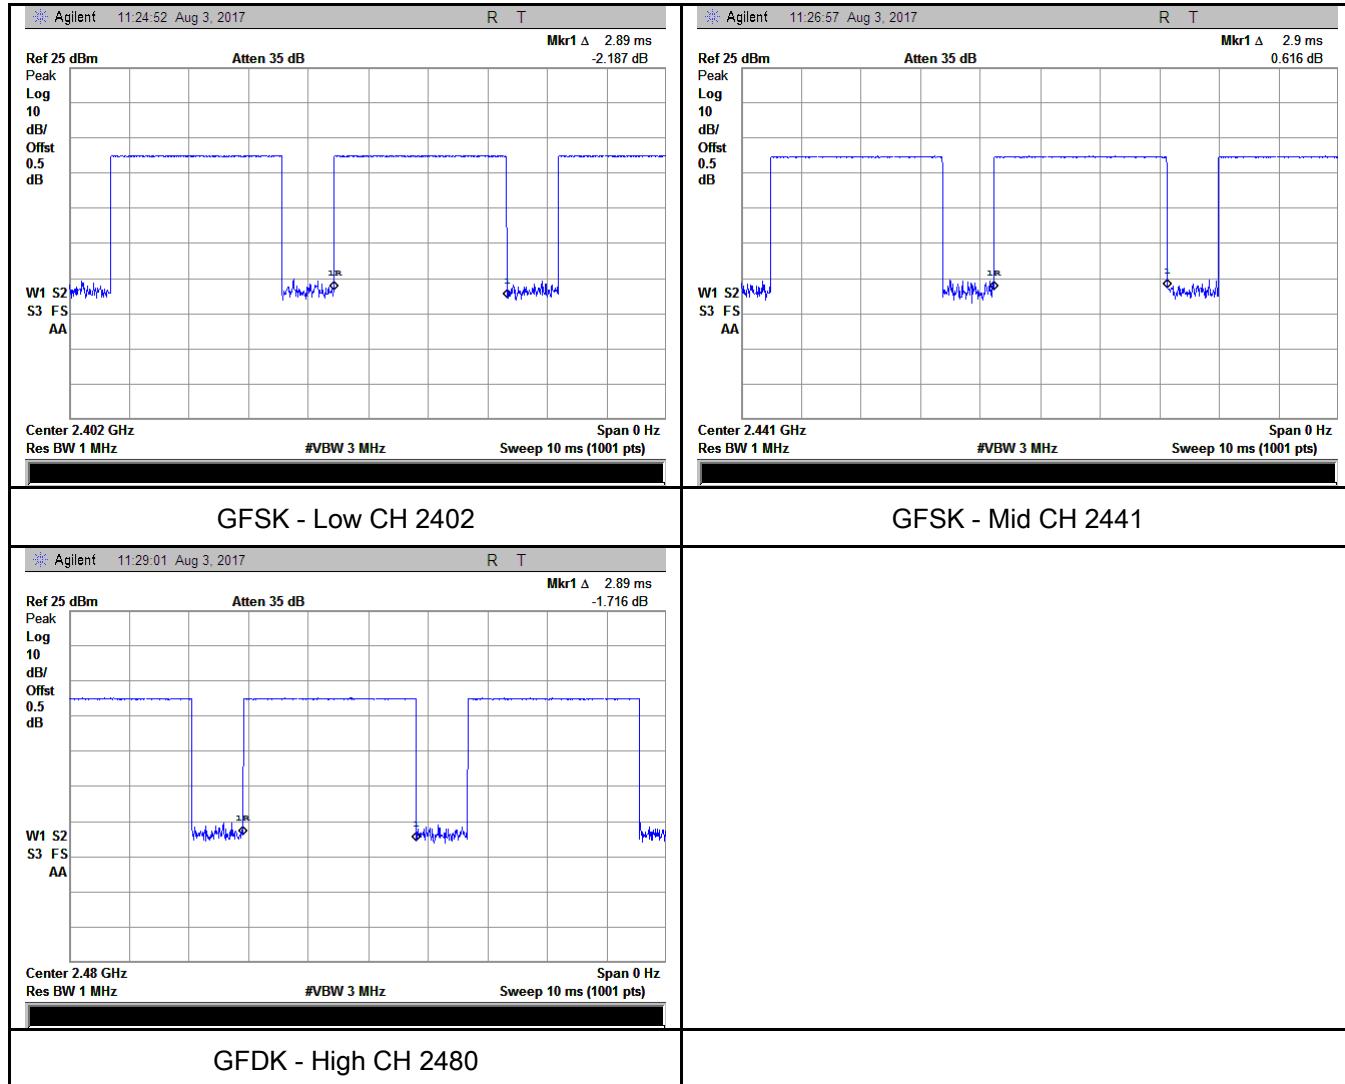

## 6.7 Band Edge & Restricted Band

Temperature	26°C
Relative Humidity	57%
Atmospheric Pressure	1018mbar
Test date :	July 21, 2017
Tested By :	Loren Luo

### Requirement(s):

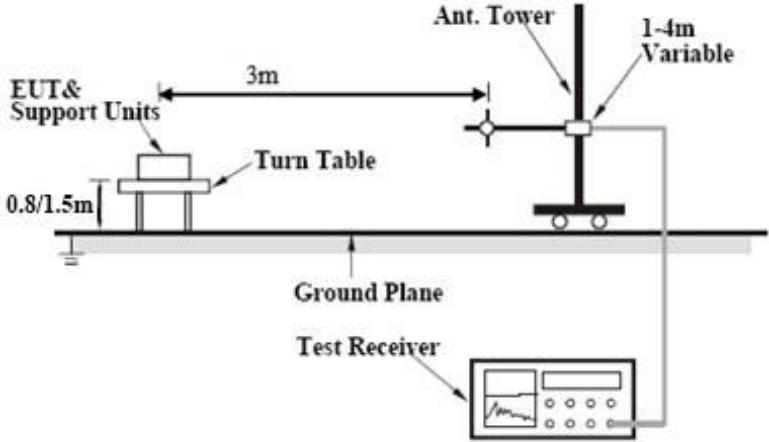Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.□	<input checked="" type="checkbox"/>
Test Setup	 <p>The diagram illustrates the test setup. An EUT &amp; Support Units is positioned on a Turn Table, which is placed on a Ground Plane. The Turn Table is at a height of 0.8/1.5m. A vertical Ant. Tower is connected to the EUT via a cable. The distance between the EUT and the Ant. Tower is 3m. The Ant. Tower is connected to a 1-4m Variable length cable. The other end of the cable is connected to a Test Receiver, which is a device with a display and control buttons.</p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Radiated Method Only</p> <ul style="list-style-type: none"> <li>- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.</li> <li>- 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range,</li> </ul>		


	<p>and make sure the instrument is operated in its linear range.</p> <ul style="list-style-type: none"> <li>- 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below:           <ul style="list-style-type: none"> <li>a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.</li> <li>b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.</li> <li>c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz.</li> </ul> </li> <li>- 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.</li> <li>- 5. Repeat above procedures until all measured frequencies were complete.</li> </ul>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data       Yes       N/A


Test Plot       Yes (See below)       N/A

## Test Plots


### GFSK Mode:

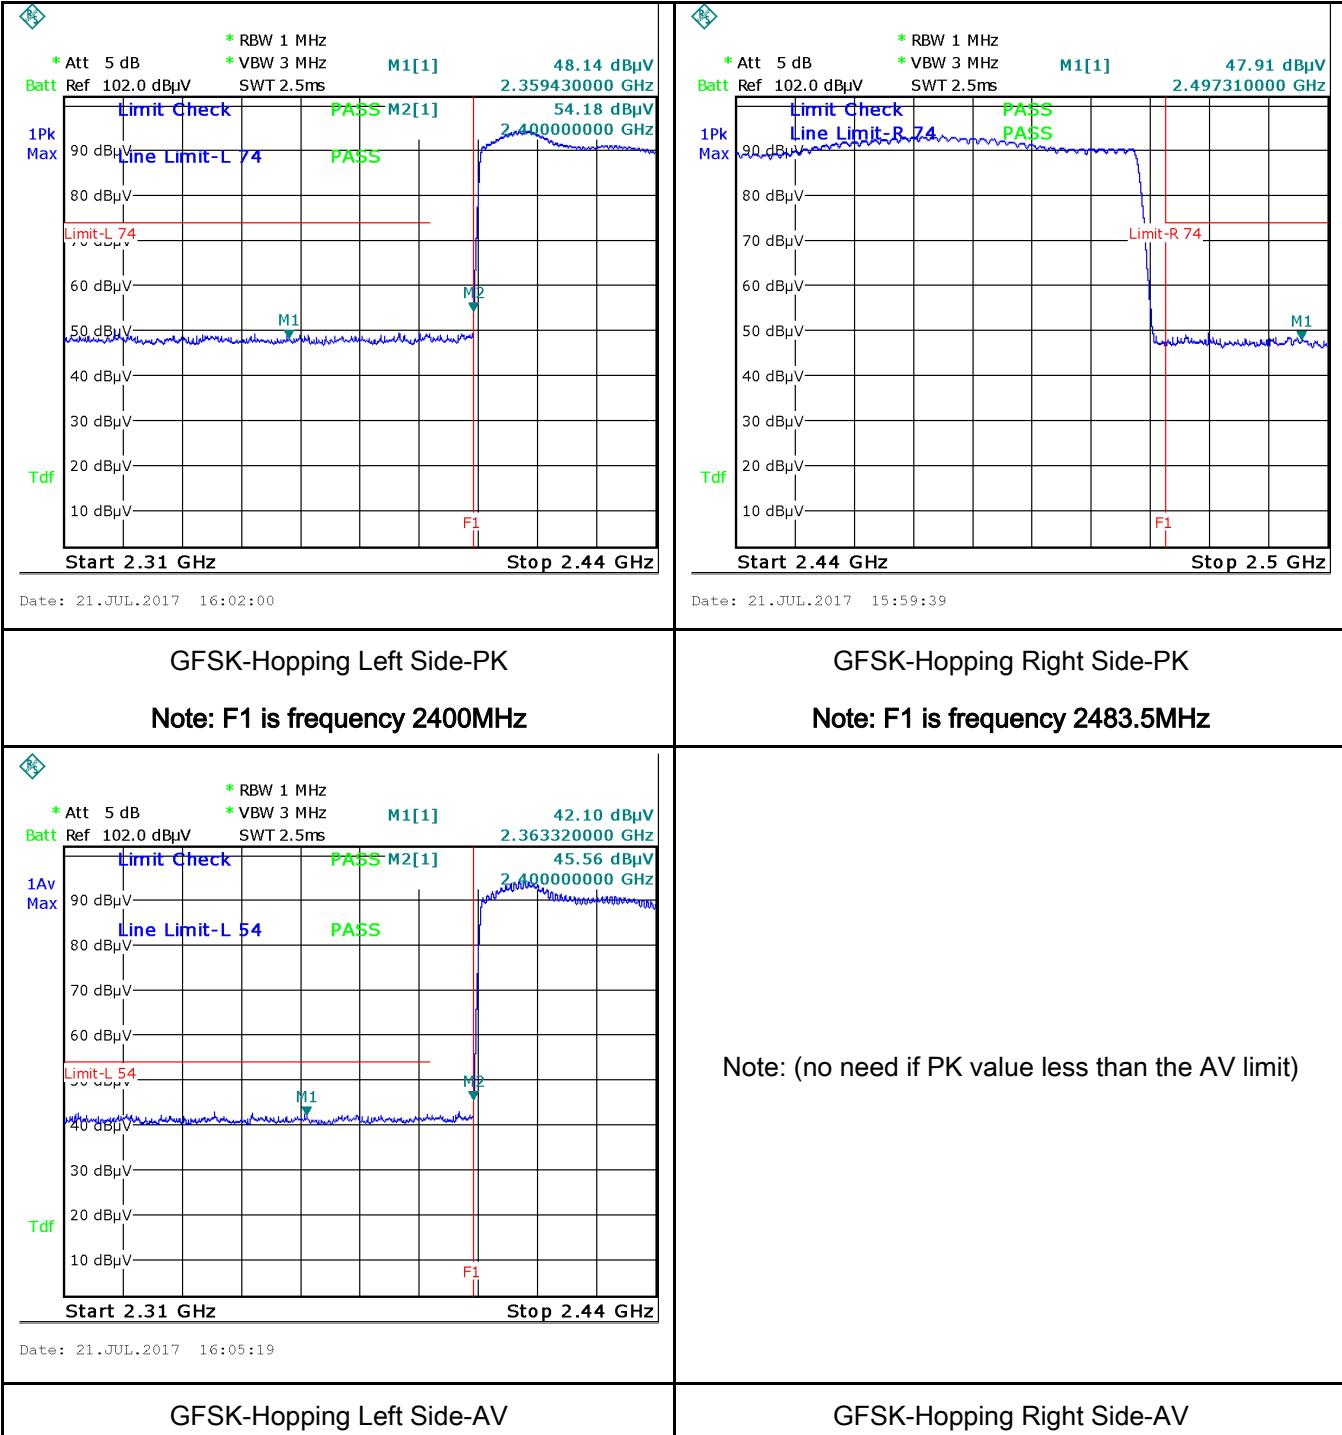

Note: Both Horizontal and vertical polarities were investigated.

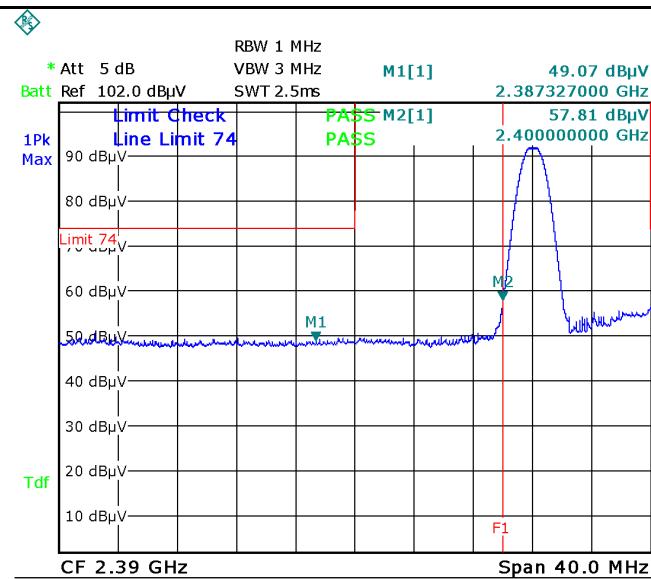


Date: 21.JUL.2017 15:38:49

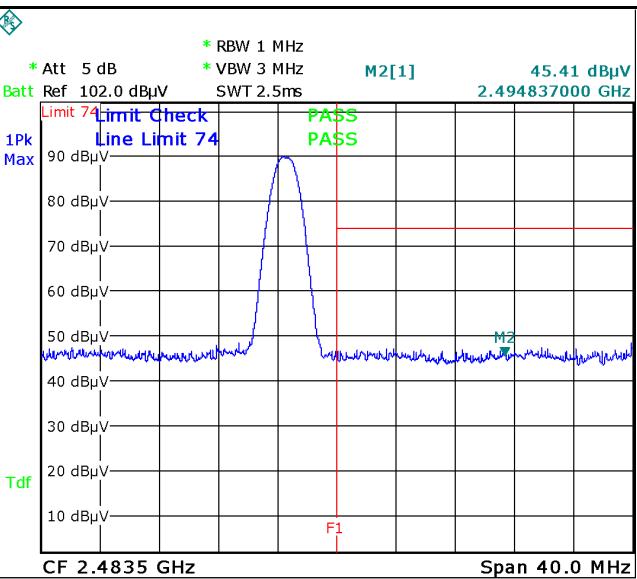


Date: 21.JUL.2017 15:52:48

## GFSK-Left Side-PK

**Note: F1 is frequency 2400MHz**

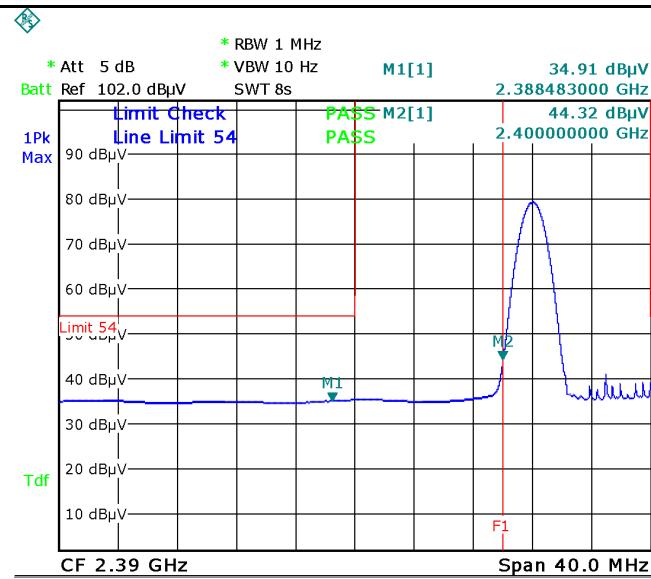

Date: 21.JUL.2017 15:41:34

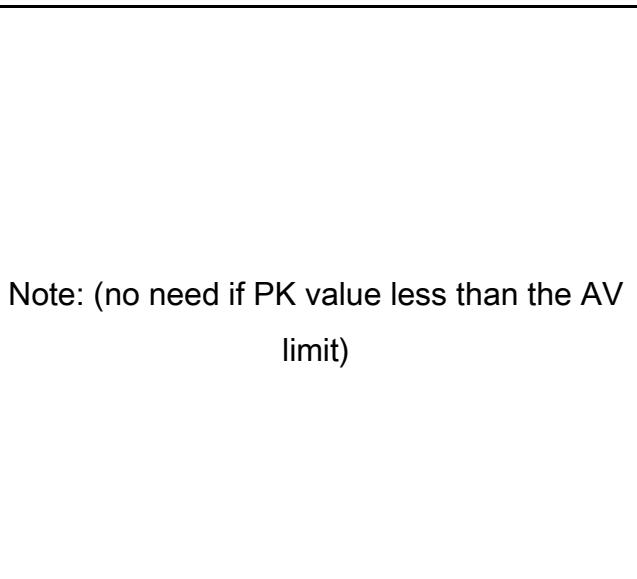

Note: (no need if PK value less than the AV limit)

## GFSK-Left Side-AV


## GFSK-Right Side-AV

Note: Both Horizontal and vertical polarities were investigated.

## 6.8 AC Power Line Conducted Emissions

Temperature	26°C
Relative Humidity	57%
Atmospheric Pressure	1018mbar
Test date :	July 21, 2017
Tested By :	Loren Luo

### Requirement(s):

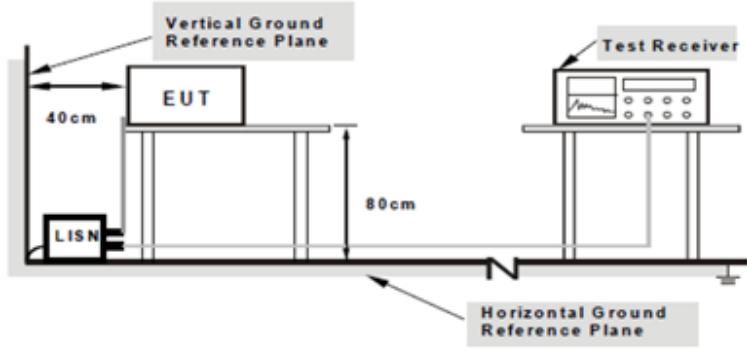
Spec	Item	Requirement	Applicable														
47CFR§15.207, RSS210 (A8.1)	a)	<p>For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu]H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.</p> <table border="1"> <thead> <tr> <th rowspan="2">Frequency ranges (MHz)</th> <th colspan="2">Limit (dB<math>\mu</math>V)</th> </tr> <tr> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 – 56</td> <td>56 – 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency ranges (MHz)	Limit (dB $\mu$ V)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50	<input checked="" type="checkbox"/>
Frequency ranges (MHz)	Limit (dB $\mu$ V)																
	QP	Average															
0.15 ~ 0.5	66 – 56	56 – 46															
0.5 ~ 5	56	46															
5 ~ 30	60	50															
Test Setup	 <p>The diagram illustrates the test setup. A 'Vertical Ground Reference Plane' is shown as a vertical line. A 'Horizontal Ground Reference Plane' is shown as a horizontal line. An 'EUT' (Equipment Under Test) is placed on a table. A 'LISN' (Line Impedance Stabilization Network) is connected between the EUT and the power source. A 'Test Receiver' is connected to the EUT. The distance between the LISN and the EUT is 40 cm. The distance between the LISN and the Test Receiver is 80 cm. The entire setup is connected to the ground reference planes.</p> <p><b>Note:</b> 1. Support units were connected to second LISN. 2. Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</p>																
Procedure	<ol style="list-style-type: none"> <li>The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table.</li> <li>The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains.</li> <li>The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss</li> </ol>																

	<p>coaxial cable.</p> <ol style="list-style-type: none"> <li>4. All other supporting equipment were powered separately from another main supply.</li> <li>5. The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.</li> <li>7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz.</li> <li>8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).</li> </ol>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data  Yes  N/A

Test Plot  Yes (See below)  N/A


**Test Mode:** Bluetooth Mode

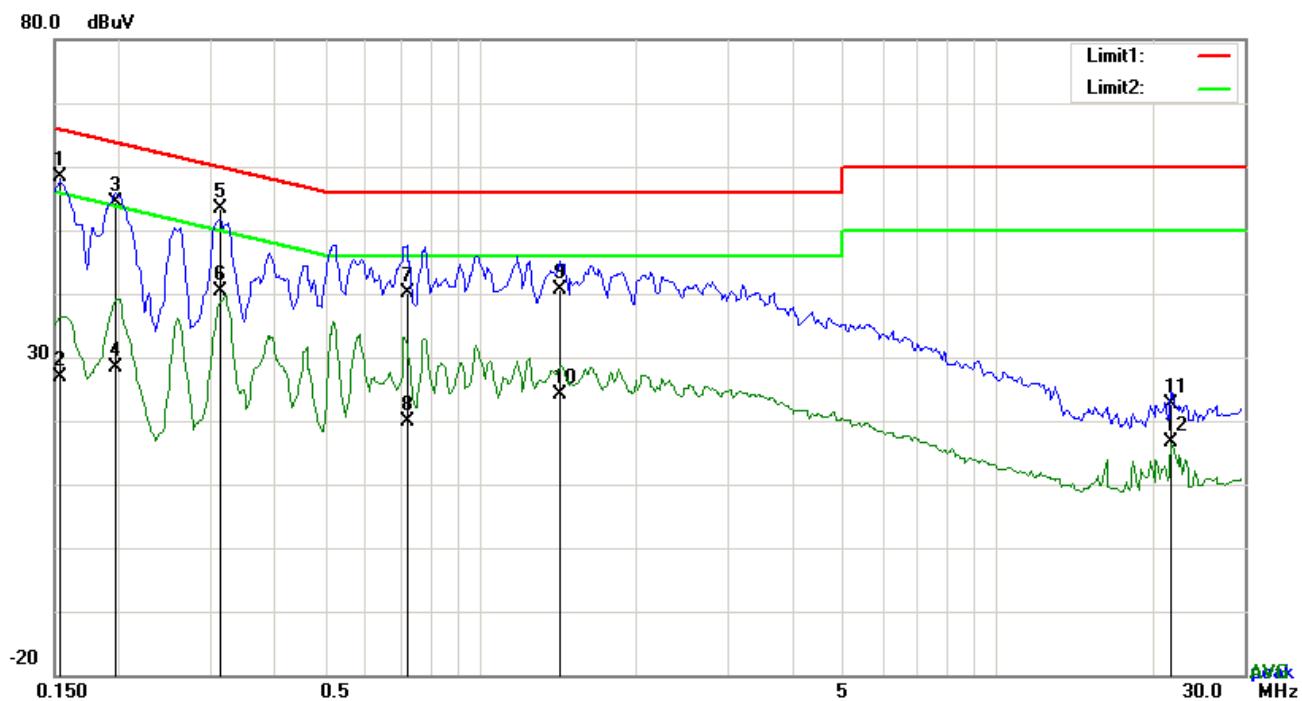

Phase Line Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	L1	0.1539	48.24	QP	10.03	58.27	65.79	-7.52
2	L1	0.1539	16.90	AVG	10.03	26.93	55.79	-28.86
3	L1	0.1968	44.44	QP	10.03	54.47	63.74	-9.27
4	L1	0.1968	18.42	AVG	10.03	28.45	53.74	-25.29
5	L1	0.3138	43.36	QP	10.03	53.39	59.87	-6.48
6	L1	0.3138	30.38	AVG	10.03	40.41	49.87	-9.46
7	L1	0.7233	30.14	QP	10.03	40.17	56.00	-15.83
8	L1	0.7233	9.90	AVG	10.03	19.93	46.00	-26.07
9	L1	1.4214	30.68	QP	10.04	40.72	56.00	-15.28
10	L1	1.4214	14.08	AVG	10.04	24.12	46.00	-21.88
11	L1	21.6654	12.36	QP	10.33	22.69	60.00	-37.31
12	L1	21.6654	6.32	AVG	10.33	16.65	50.00	-33.35

**Test Mode:** Bluetooth Mode

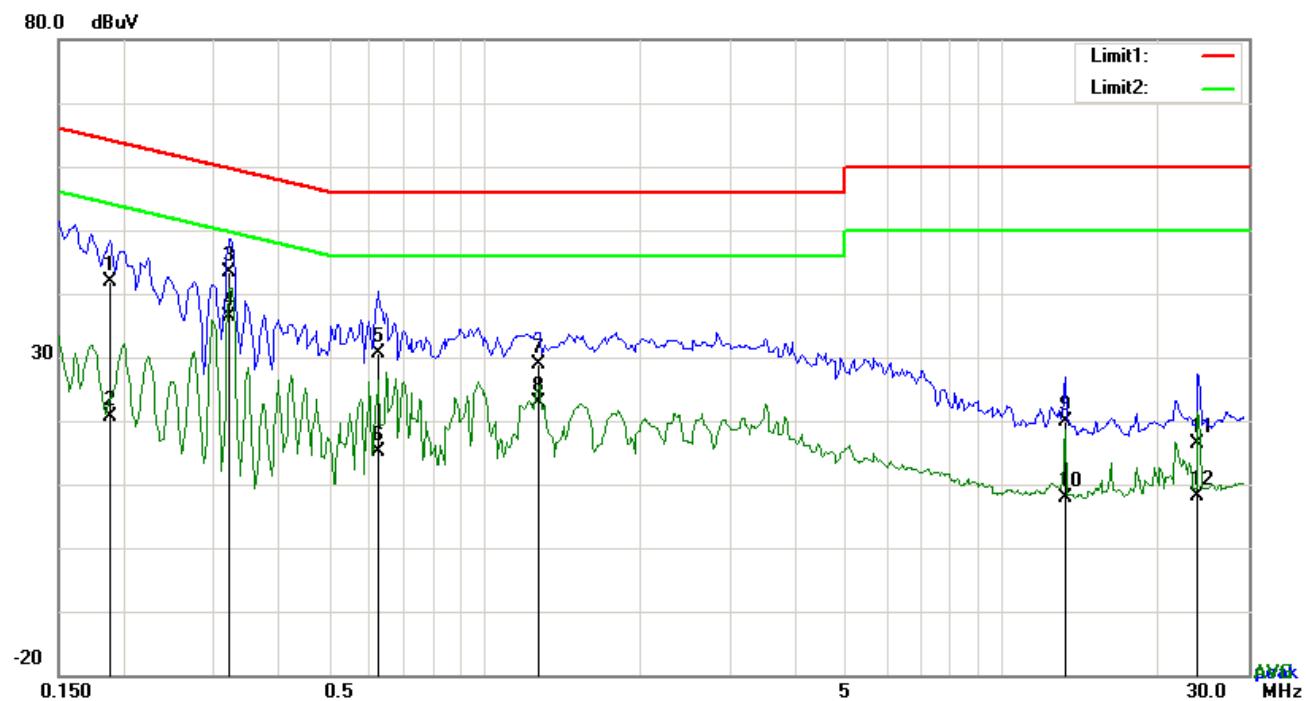


**Test Data**

Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	N	0.1890	31.89	QP	10.02	41.91	64.08	-22.17
2	N	0.1890	10.71	AVG	10.02	20.73	54.08	-33.35
3	N	0.3216	33.47	QP	10.02	43.49	59.67	-16.18
4	N	0.3216	26.35	AVG	10.02	36.37	49.67	-13.30
5	N	0.6258	20.54	QP	10.02	30.56	56.00	-25.44
6	N	0.6258	5.22	AVG	10.02	15.24	46.00	-30.76
7	N	1.2688	18.83	QP	10.03	28.86	56.00	-27.14
8	N	1.2688	12.82	AVG	10.03	22.85	46.00	-23.15
9	N	13.2765	9.63	QP	10.18	19.81	60.00	-40.19
10	N	13.2765	-2.28	AVG	10.18	7.90	50.00	-42.10
11	N	24.0015	6.08	QP	10.32	16.40	60.00	-43.60
12	N	24.0015	-2.24	AVG	10.32	8.08	50.00	-41.92

**Test Mode:** Bluetooth Mode

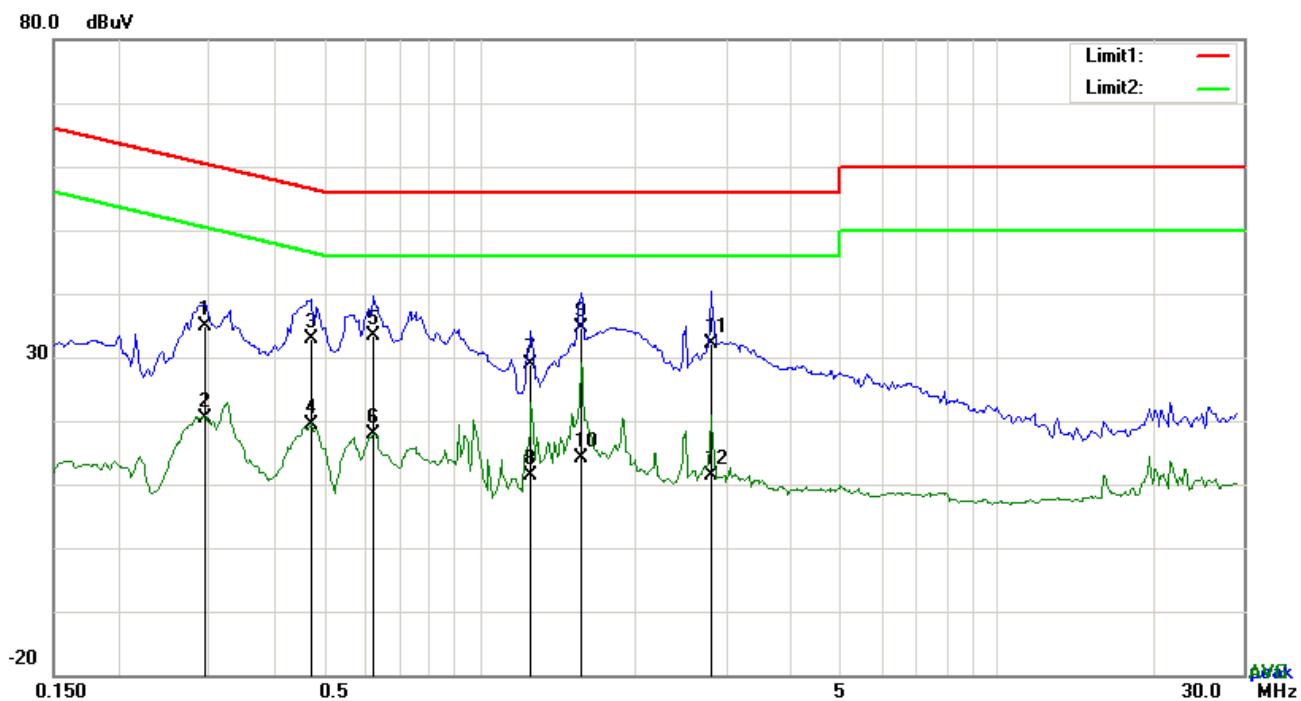


**Test Data**

Phase Line Plot at 240Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	L1	0.2943	24.82	QP	10.03	34.85	60.40	-25.55
2	L1	0.2943	10.28	AVG	10.03	20.31	50.40	-30.09
3	L1	0.4737	22.77	QP	10.03	32.80	56.45	-23.65
4	L1	0.4737	9.37	AVG	10.03	19.40	46.45	-27.05
5	L1	0.6219	23.34	QP	10.03	33.37	56.00	-22.63
6	L1	0.6219	7.89	AVG	10.03	17.92	46.00	-28.08
7	L1	1.2576	18.93	QP	10.03	28.96	56.00	-27.04
8	L1	1.2576	1.37	AVG	10.03	11.40	46.00	-34.60
9	L1	1.5735	24.66	QP	10.04	34.70	56.00	-21.30
10	L1	1.5735	4.07	AVG	10.04	14.11	46.00	-31.89
11	L1	2.8020	22.13	QP	10.05	32.18	56.00	-23.82
12	L1	2.8020	1.37	AVG	10.05	11.42	46.00	-34.58

**Test Mode:** Bluetooth Mode

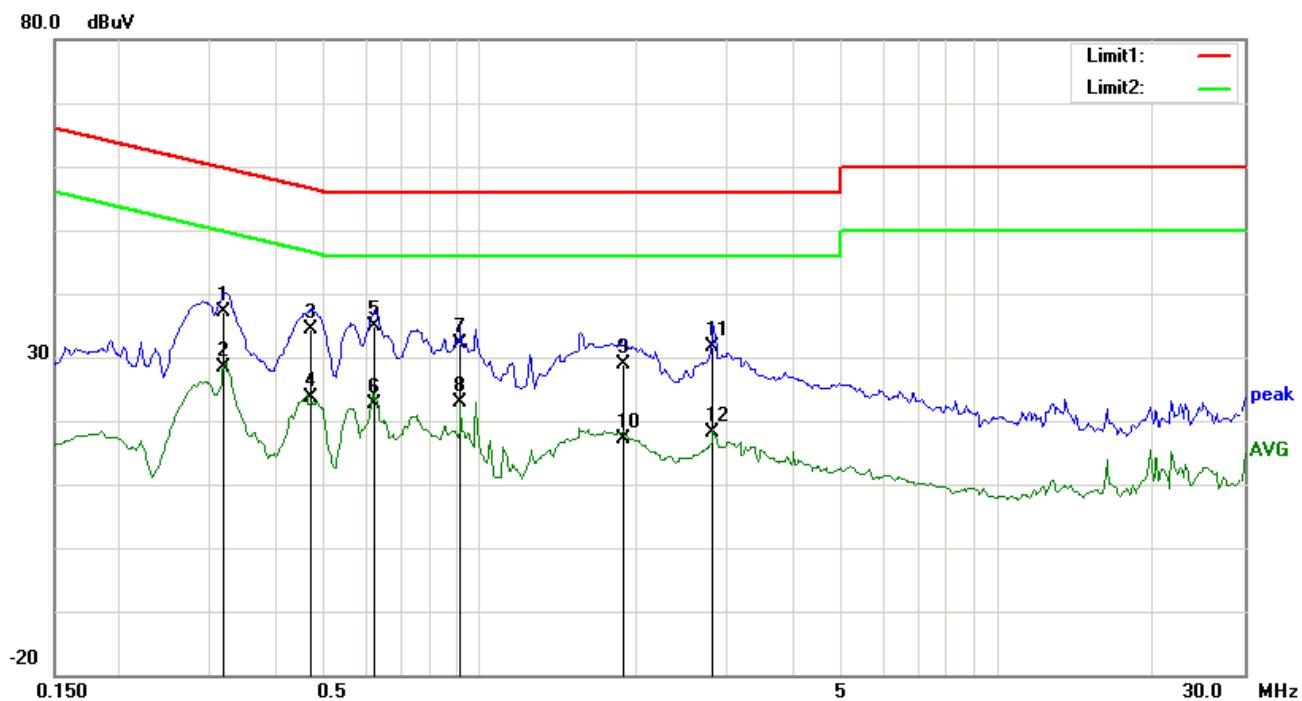

**Test Data**

Phase Neutral Plot at 240Vac, 60Hz


No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	N	0.3183	27.18	QP	10.02	37.20	59.75	-22.55
2	N	0.3183	18.28	AVG	10.02	28.30	49.75	-21.45
3	N	0.4698	24.41	QP	10.02	34.43	56.52	-22.09
4	N	0.4698	13.54	AVG	10.02	23.56	46.52	-22.96
5	N	0.6258	24.83	QP	10.02	34.85	56.00	-21.15
6	N	0.6258	12.53	AVG	10.02	22.55	46.00	-23.45
7	N	0.9183	22.08	QP	10.03	32.11	56.00	-23.89
8	N	0.9183	12.77	AVG	10.03	22.80	46.00	-23.20
9	N	1.8894	18.77	QP	10.04	28.81	56.00	-27.19
10	N	1.8894	7.20	AVG	10.04	17.24	46.00	-28.76
11	N	2.8098	21.62	QP	10.05	31.67	56.00	-24.33
12	N	2.8098	7.99	AVG	10.05	18.04	46.00	-27.96


## 6.9 Radiated Emissions & Restricted Band

Temperature	26°C
Relative Humidity	57%
Atmospheric Pressure	1018mbar
Test date :	July 21, 2017
Tested By :	Loren Luo

### Requirement(s):

Spec	Item	Requirement	Applicable																
47CFR§15. 205, §15.209, §15.247(d)	a)	<p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (<math>\mu</math>V/m)</th> </tr> </thead> <tbody> <tr> <td>0.009~0.490</td> <td>2400/F(KHz)</td> </tr> <tr> <td>0.490~1.705</td> <td>24000/F(KHz)</td> </tr> <tr> <td>1.705~30.0</td> <td>30</td> </tr> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216~960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength ( $\mu$ V/m)	0.009~0.490	2400/F(KHz)	0.490~1.705	24000/F(KHz)	1.705~30.0	30	30 – 88	100	88 – 216	150	216~960	200	Above 960	500	<input checked="" type="checkbox"/>
Frequency range (MHz)	Field Strength ( $\mu$ V/m)																		
0.009~0.490	2400/F(KHz)																		
0.490~1.705	24000/F(KHz)																		
1.705~30.0	30																		
30 – 88	100																		
88 – 216	150																		
216~960	200																		
Above 960	500																		

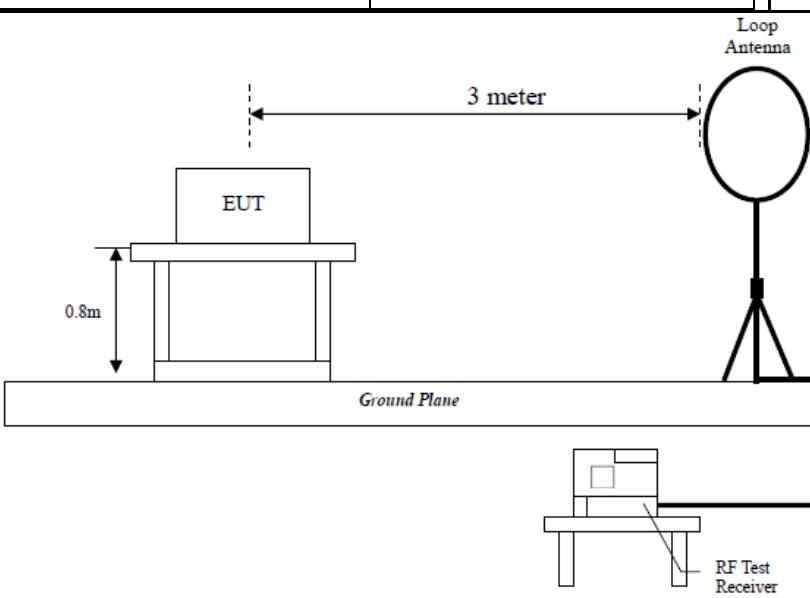Test Setup	 <p>The diagram illustrates the test setup for radiated emissions. A Loop Antenna is positioned 3 meters horizontally from the EUT (Equipment Under Test), which is placed on a stand 0.8 meters above a Ground Plane. An RF Test Receiver is connected to the Loop Antenna to measure the signal strength.</p>
------------	---

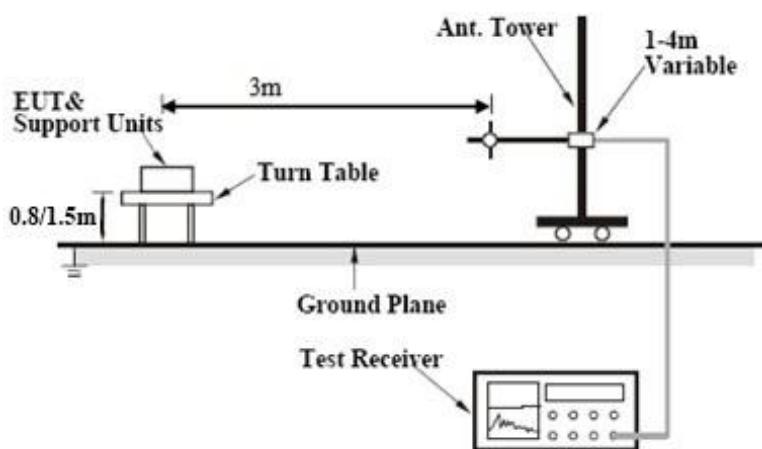

Procedure	<ol style="list-style-type: none"> <li>1. The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>2. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:           <ol style="list-style-type: none"> <li>a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</li> <li>b. The EUT was then rotated to the direction that gave the maximum emission.</li> <li>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.</li> </ol> </li> <li>3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.</li> <li>4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz.</li> <li>5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</li> </ol>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Test Data	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> N/A
Test Plot	<input checked="" type="checkbox"/> Yes (See below) <input type="checkbox"/> N/A

Yes       N/A  
 Yes (See below)       N/A

## Test Result:

Test Mode:	Transmitting Mode
------------	-------------------

Frequency range: 9KHz - 30MHz

Freq. (MHz)	Detection value	Factor (dB/m)	Reading (dBuV/m)	Result (dBuV/m)	Limit@3m (dBuV/m)	Margin (dB)
--	--	--	--	--	--	>20
--	--	--	--	--	--	>20

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance}/\text{test distance})(\text{dB})$ ;

Limit line = specific limits(dBuv) + distance extrapolation factor.

**Test Mode:** Bluetooth Mode

**30MHz -1GHz**

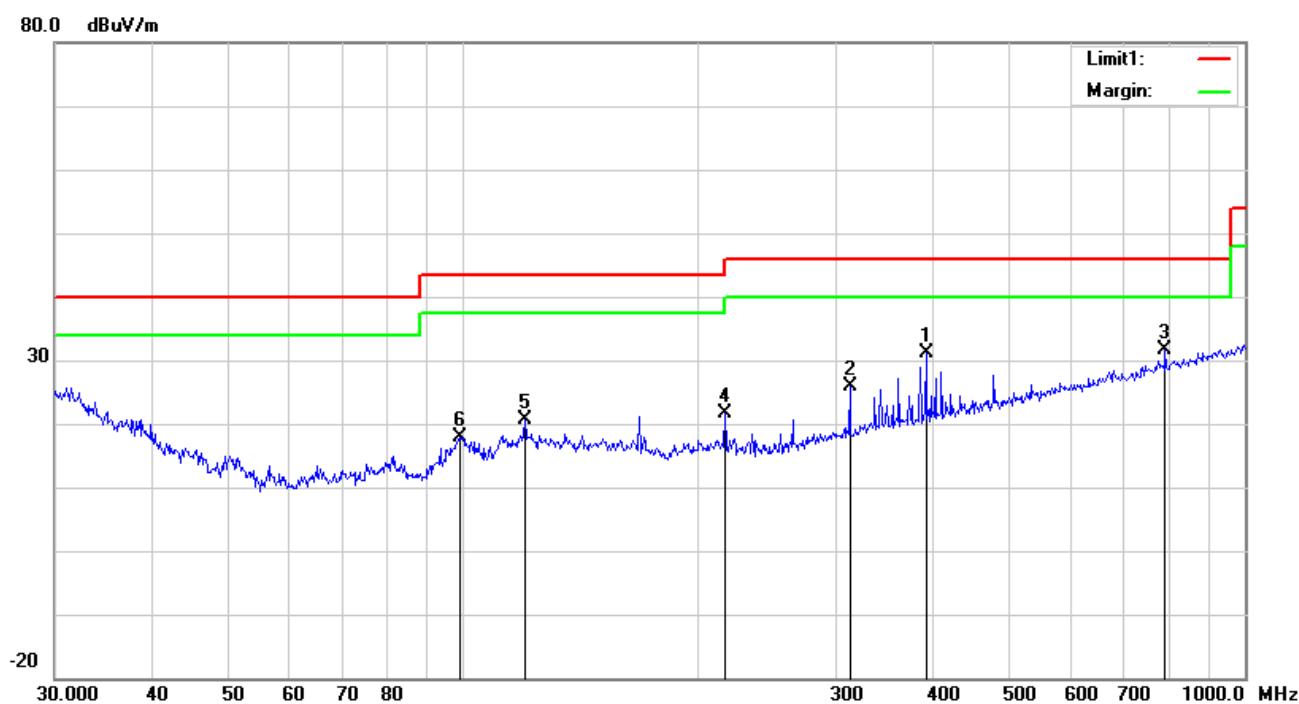


### Test Data

Horizontal Polarity Plot @3m

No.	P/L	Frequency	Reading	Detect or	Ant_F	PA_G	Cab_L	Result	Limit	Margin	Height	Degr ee
		(MHz)	(dBuV/m)		(dB/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	( )
1	H	390.7226	35.59	peak	15.51	22.04	2.02	31.08	46.00	-14.92	100	140
2	H	312.1794	32.39	peak	13.86	22.26	1.85	25.84	46.00	-20.16	100	211
3	H	790.6188	28.46	peak	21.29	21.17	2.94	31.52	46.00	-14.48	100	270
4	H	216.0240	30.47	peak	11.88	22.35	1.59	21.59	46.00	-24.41	100	308
5	H	119.8556	27.97	peak	13.87	22.36	1.16	20.64	43.50	-22.86	100	156
6	H	98.8326	28.97	peak	10.12	22.32	1.09	17.86	43.50	-25.64	100	353

### 30MHz -1GHz

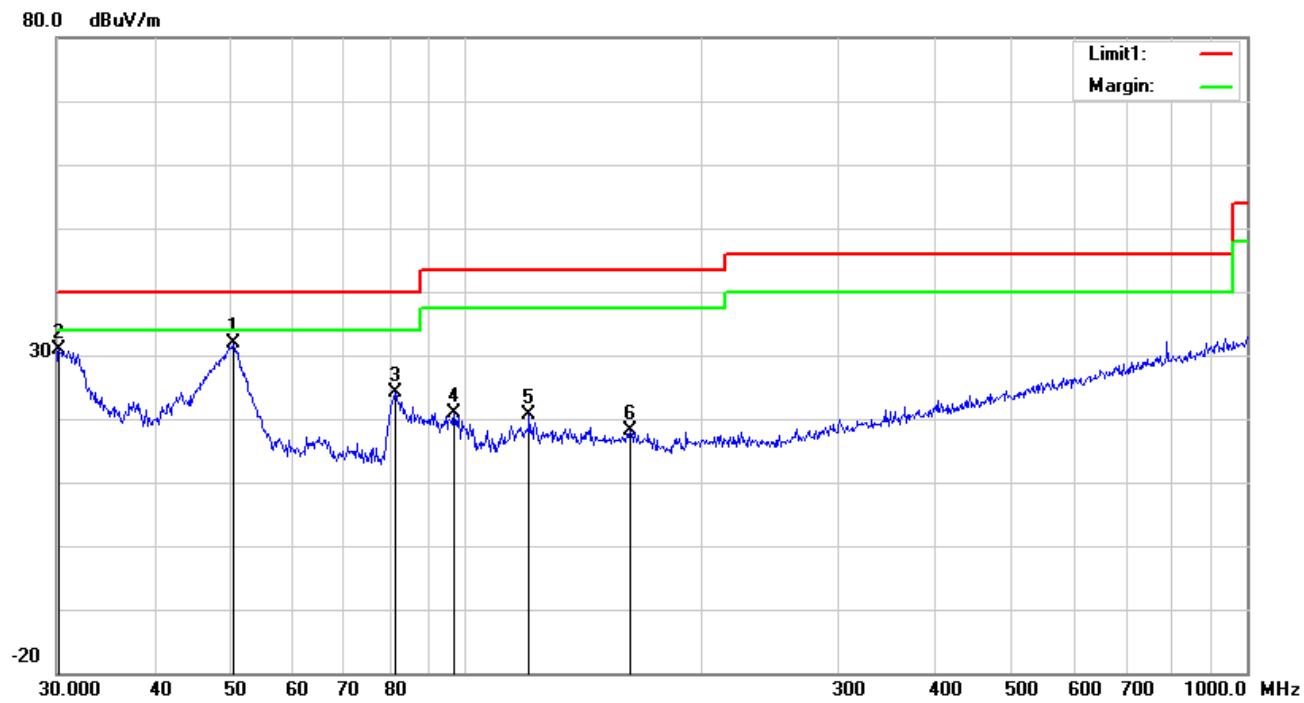

### Test Data

Vertical Polarity Plot @3m

No.	P/L	Frequency	Reading	Detect or	Ant_F	PA_G	Cab_L	Result	Limit	Margin	Height	Degr ee
		(MHz)	(dBuV/m)		(dB/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	( )
1	V	50.5860	45.04	peak	8.34	22.38	0.80	31.80	40.00	-8.20	100	15
2	V	30.2111	31.25	peak	21.24	22.28	0.63	30.84	40.00	-9.16	100	61
3	V	81.4970	37.87	peak	7.66	22.41	1.06	24.18	40.00	-15.82	100	355
4	V	96.7749	32.59	peak	9.63	22.32	1.04	20.94	43.50	-22.56	100	7
5	V	120.6991	27.99	peak	13.85	22.36	1.16	20.64	43.50	-22.86	100	190
6	V	162.6106	26.57	peak	12.39	22.27	1.38	18.07	43.50	-25.43	200	193

## Above 1GHz

Test Mode:	Transmitting Mode
------------	-------------------

### Low Channel: GFSK Mode (Worst Case) (2402 MHz)

Frequency (MHz)	S.A. Reading (dB $\mu$ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4804	40.49	AV	V	33.39	7.22	48.46	32.64	54	-21.36
4804	41.04	AV	H	33.39	7.22	48.46	33.19	54	-20.81
4804	49.3	PK	V	33.39	7.22	48.46	41.45	74	-32.55
4804	45.86	PK	H	33.39	7.22	48.46	38.01	74	-35.99
15402	23.36	AV	V	42.95	14.47	46.1	34.68	54	-19.32
15402	26.26	AV	H	42.95	14.47	46.1	37.58	54	-16.42
15402	39.55	PK	V	42.95	14.47	46.1	50.87	74	-23.13
15402	43.95	PK	H	42.95	14.47	46.1	55.27	74	-18.73

### Middle Channel: GFSK Mode (Worst Case) (2441 MHz)

Frequency (MHz)	S.A. Reading (dB $\mu$ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4882	38.33	AV	V	33.62	7.53	48.36	31.12	54	-22.88
4882	40.75	AV	H	33.62	7.53	48.36	33.54	54	-20.46
4882	48.98	PK	V	33.62	7.53	48.36	41.77	74	-32.23
4882	47.8	PK	H	33.62	7.53	48.36	40.59	74	-33.41
10548	25.84	AV	V	39.58	9.73	46.84	28.31	54	-25.69
10548	22.33	AV	H	39.58	9.73	46.84	24.8	54	-29.20
10548	40.71	PK	V	39.58	9.73	46.84	43.18	74	-30.82
10548	41.92	PK	H	39.58	9.73	46.84	44.39	74	-29.61

High Channel: GFSK Mode (Worst Case) (2480 MHz)

Frequency (MHz)	S.A. Reading (dB $\mu$ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4960	39.01	AV	V	33.89	7.86	48.31	32.45	54	-21.55
4960	39.38	AV	H	33.89	7.86	48.31	32.82	54	-21.18
4960	46.06	PK	V	33.89	7.86	48.31	39.5	74	-34.5
4960	47.26	PK	H	33.89	7.86	48.31	40.7	74	-33.3
17828	23.44	AV	V	43.21	19.43	44.4	41.68	54	-12.32
17828	25.43	AV	H	43.21	19.43	44.4	43.67	54	-10.33
17828	40.4	PK	V	43.21	19.43	44.4	58.64	74	-15.36
17828	39.91	PK	H	43.21	19.43	44.4	58.15	74	-15.85

**Note:**

1, The testing has been conformed to  $10 \times 2480\text{MHz} = 24,800\text{MHz}$

2, All other emissions more than 30 dB below the limit

3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

4, The radiated spurious test above 18GHz is subcontracted to SIEMIC (Nanjing-China) Laboratories. and found 30dB below the limit at least.

## Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
<b>AC Line Conducted</b>					
EMI test receiver	ESCS30	8471241027	09/16/2016	09/15/2017	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191106	09/24/2016	09/23/2017	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191107	09/24/2016	09/23/2017	<input checked="" type="checkbox"/>
ISN	ISN T800	34373	09/24/2016	09/23/2017	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/23/2016	09/22/2017	<input checked="" type="checkbox"/>
Transient Limiter	LIT-153	531118	08/31/2016	08/30/2017	<input checked="" type="checkbox"/>
<b>RF conducted test</b>					
Agilent ESA-E SERIES	E4407B	MY45108319	09/16/2016	09/15/2017	<input checked="" type="checkbox"/>
Power Splitter	1#	1#	08/31/2016	08/30/2017	<input checked="" type="checkbox"/>
DC Power Supply	E3640A	MY40004013	09/16/2016	09/15/2017	<input checked="" type="checkbox"/>
<b>Radiated Emissions</b>					
EMI test receiver	ESL6	100262	09/16/2016	09/15/2017	<input checked="" type="checkbox"/>
Positioning Controller	UC3000	MF780208282	11/18/2016	11/17/2017	<input checked="" type="checkbox"/>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	08/31/2016	08/30/2017	<input checked="" type="checkbox"/>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/23/2017	03/22/2018	<input checked="" type="checkbox"/>
Active Antenna (9kHz-30MHz)	AL-130	121031	10/13/2016	10/12/2017	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/20/2016	09/19/2017	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/23/2016	09/22/2017	<input checked="" type="checkbox"/>
Universal Radio Communication Tester	CMU200	121393	09/24/2016	09/23/2017	<input checked="" type="checkbox"/>

## Annex B. EUT And Test Setup Photographs

## Annex B.i.    Photograph: EUT External Photo

## Whole Package View



## Adapter - Table View




EUT - Front View




EUT - Rear View




EUT - Top View

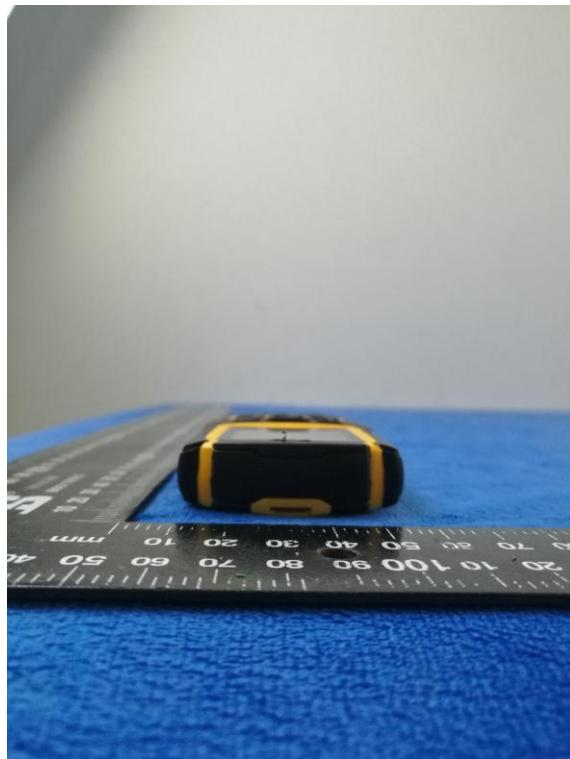

EUT - Bottom View

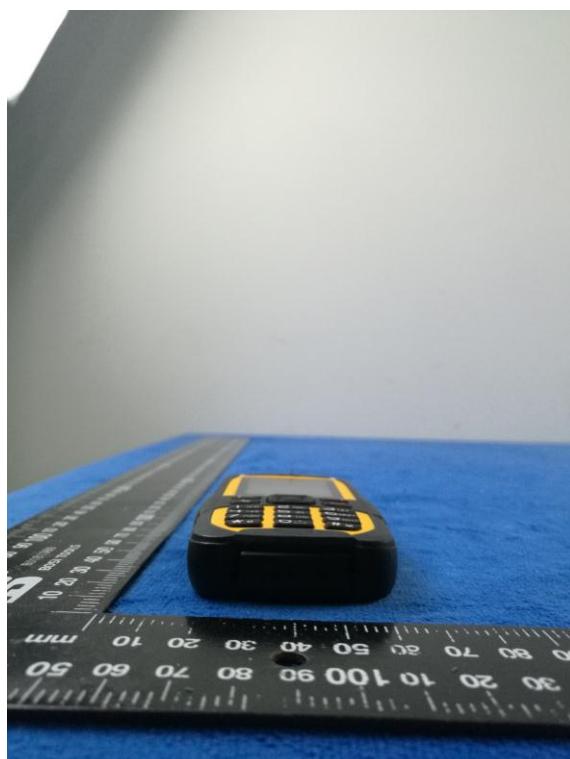

EUT - Left View

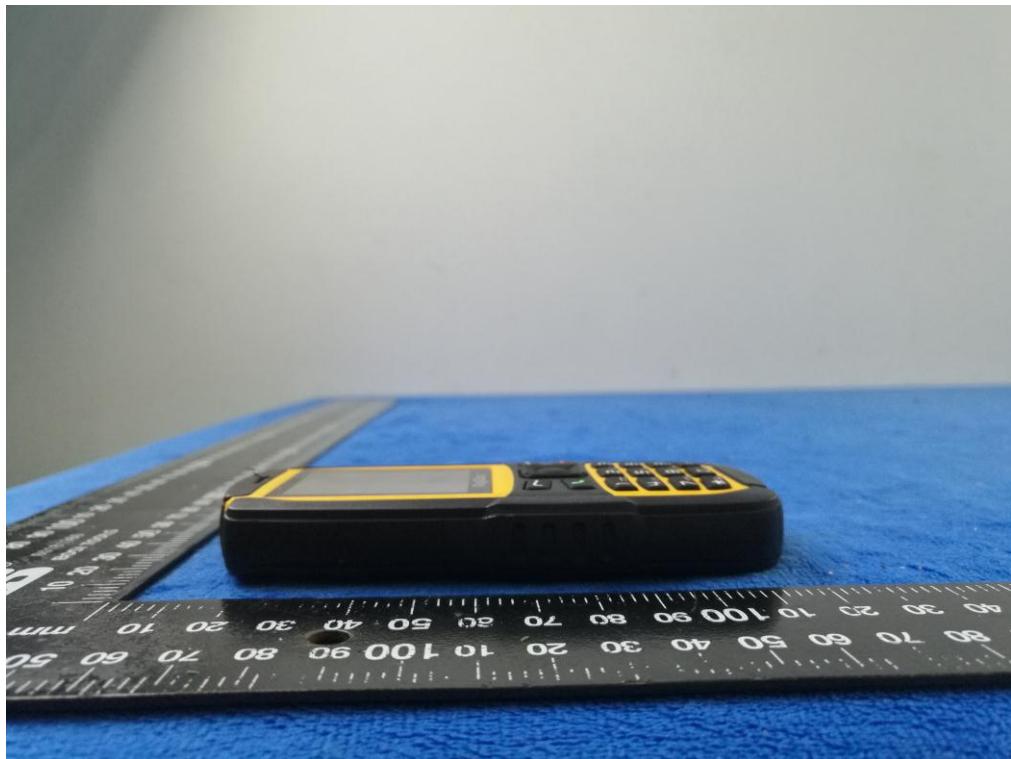

EUT - Right View



Annex B.ii. Photograph: EUT Internal Photo

Cover Off - Top View 1




Cover Off - Top View 2




Battery - Front View




Battery - Rear View

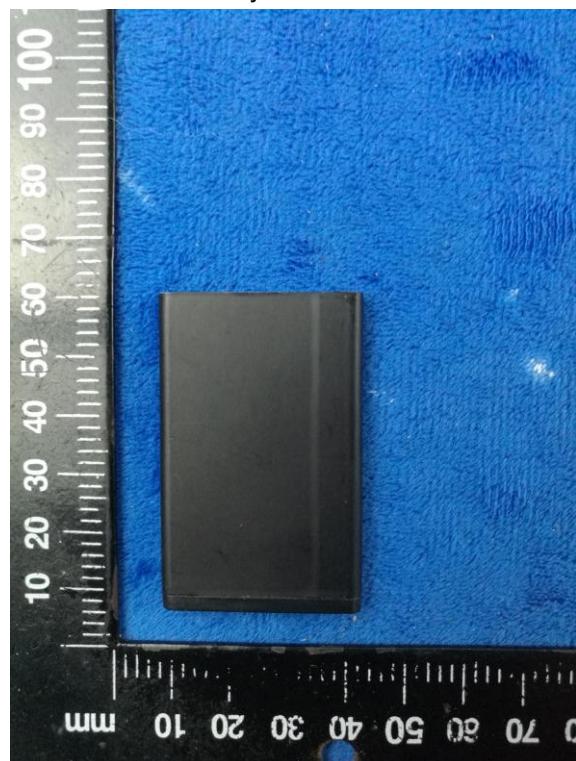


Mainboard with Shielding - Front View

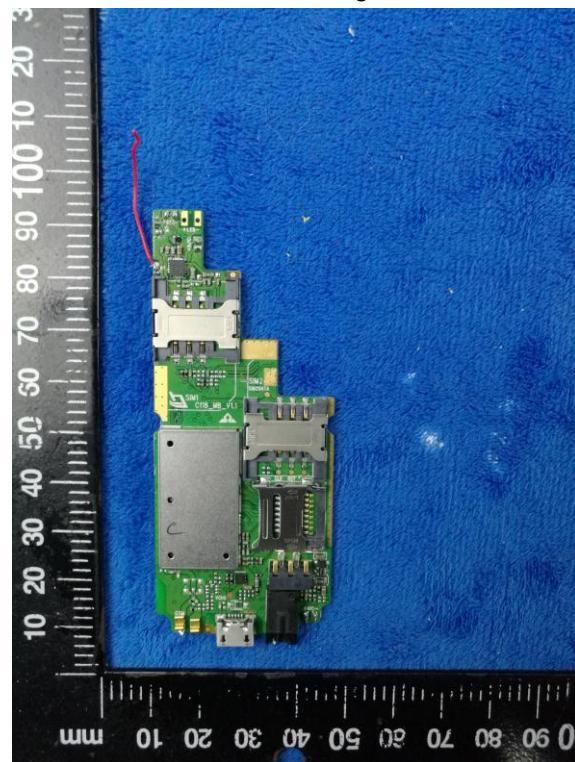


Mainboard without Shielding - Front View

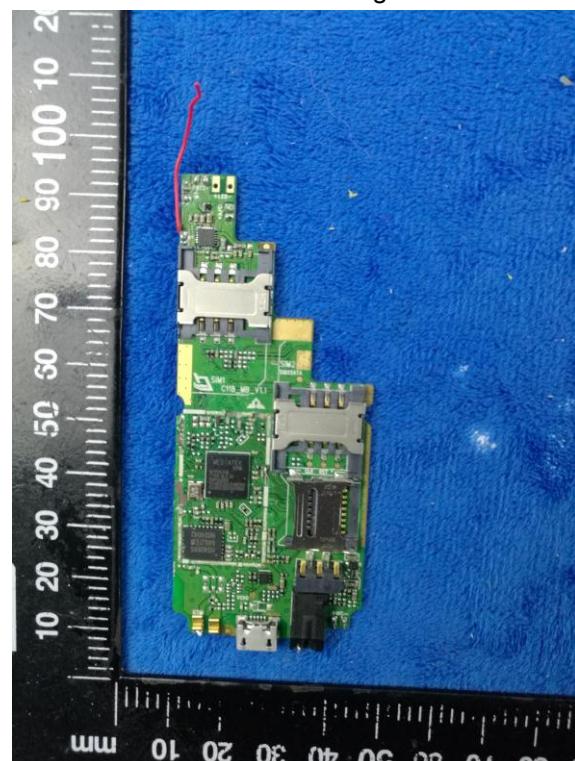


Mainboard with Shielding – Rear View

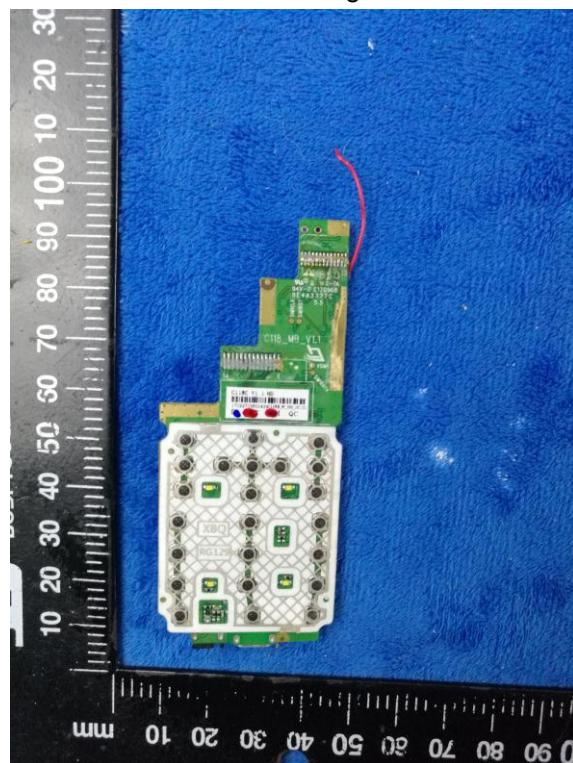

Mainboard without Shielding – Rear View

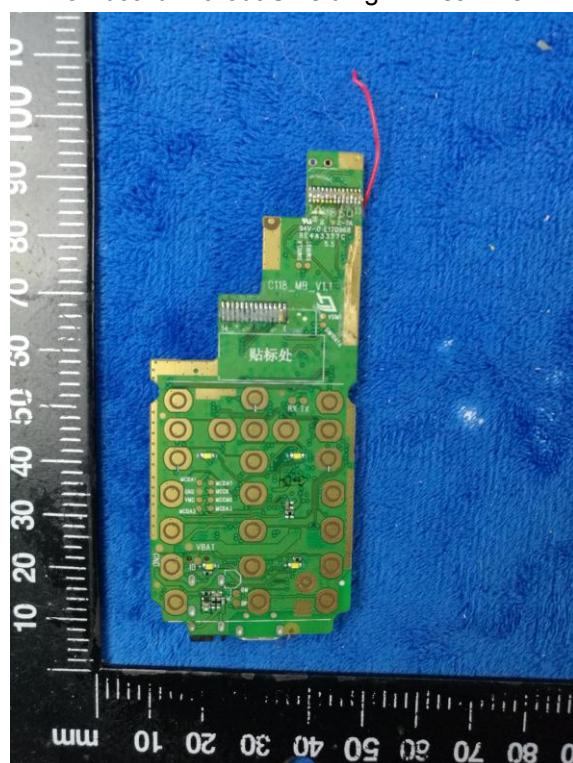


LCD – Front View

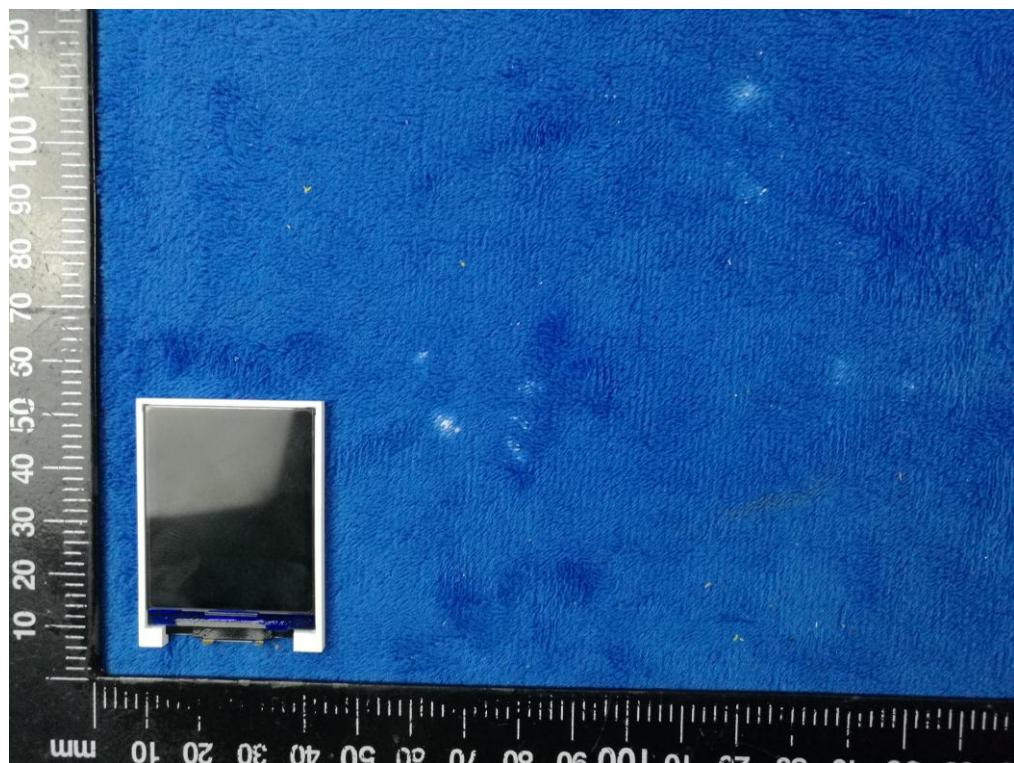


LCD – Rear View



GSM/PCS Antenna View

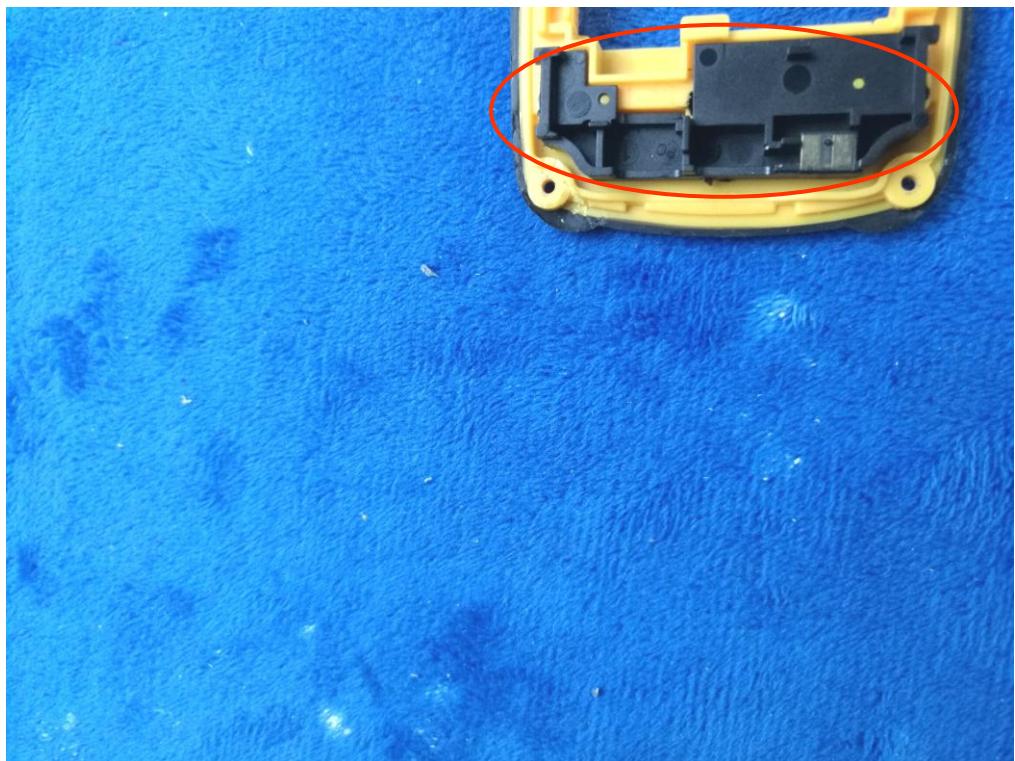

BT - Antenna View

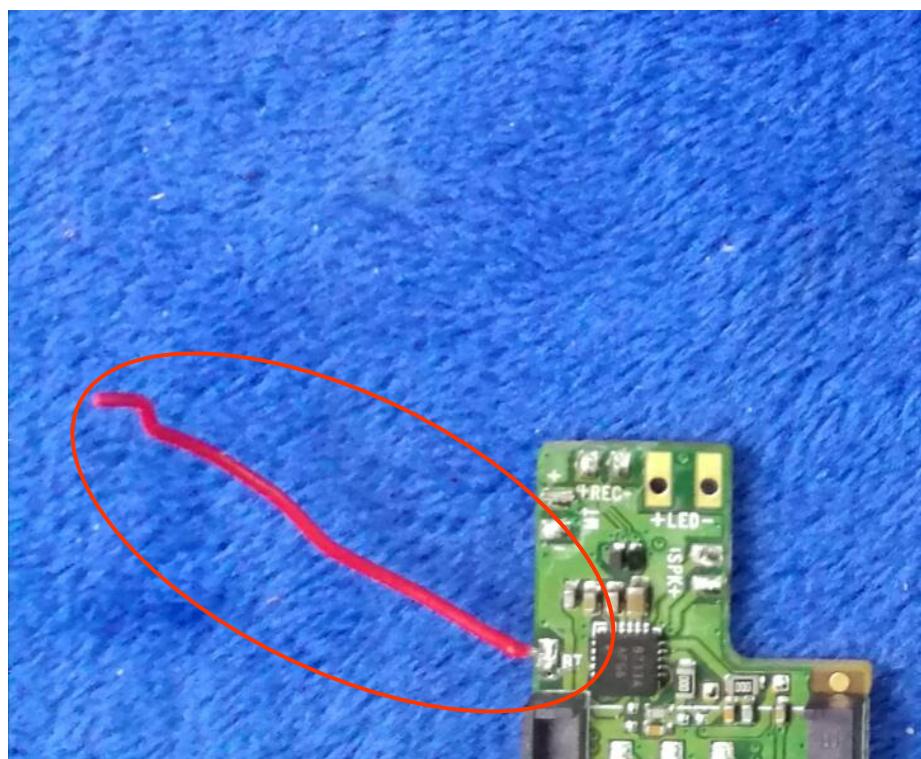


**Annex B.iii. Photograph: Test Setup Photo**




## Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

### Annex C.ii. TEST SET UP BLOCK


Block Configuration Diagram for AC Line Conducted Emissions

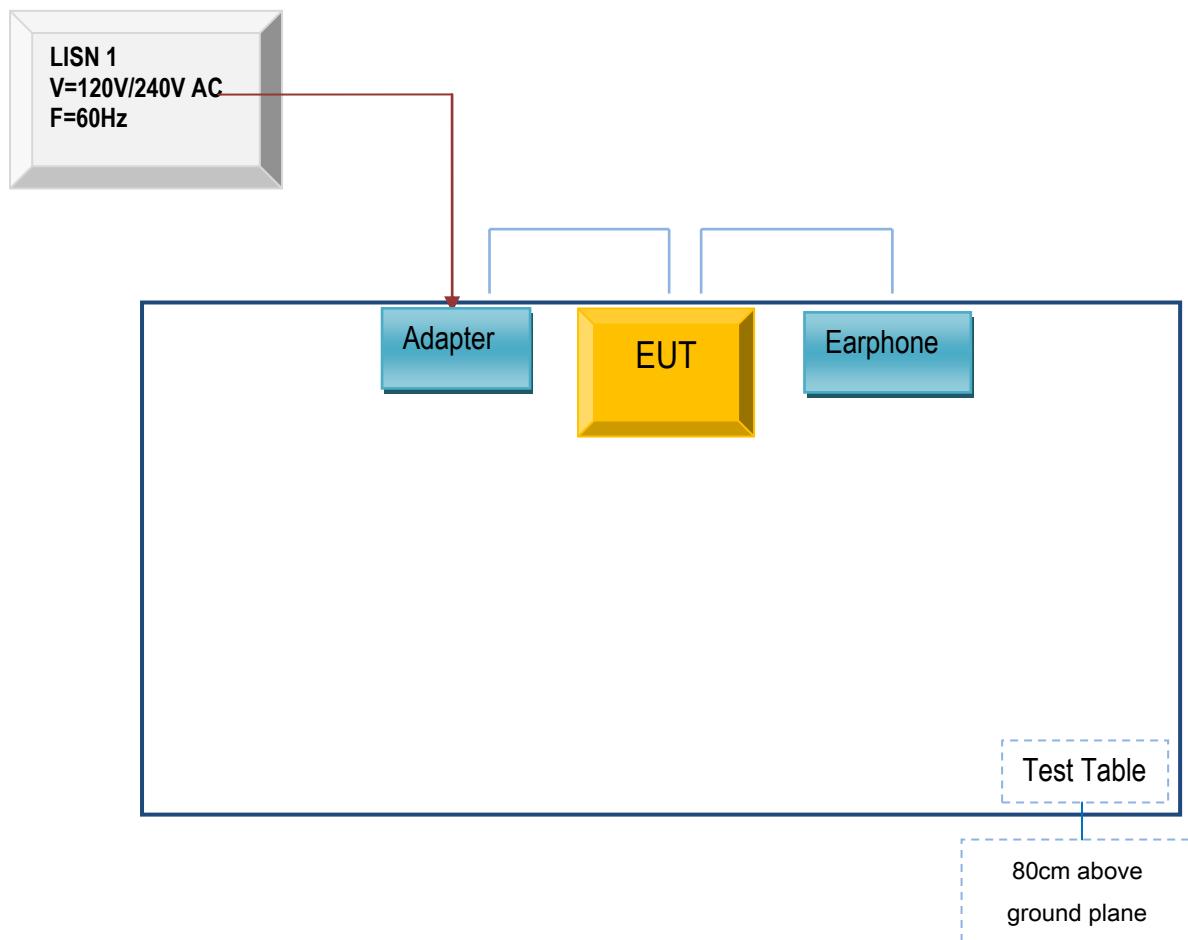

Block Configuration Diagram for Radiated Emissions ( Below 1GHz ) .

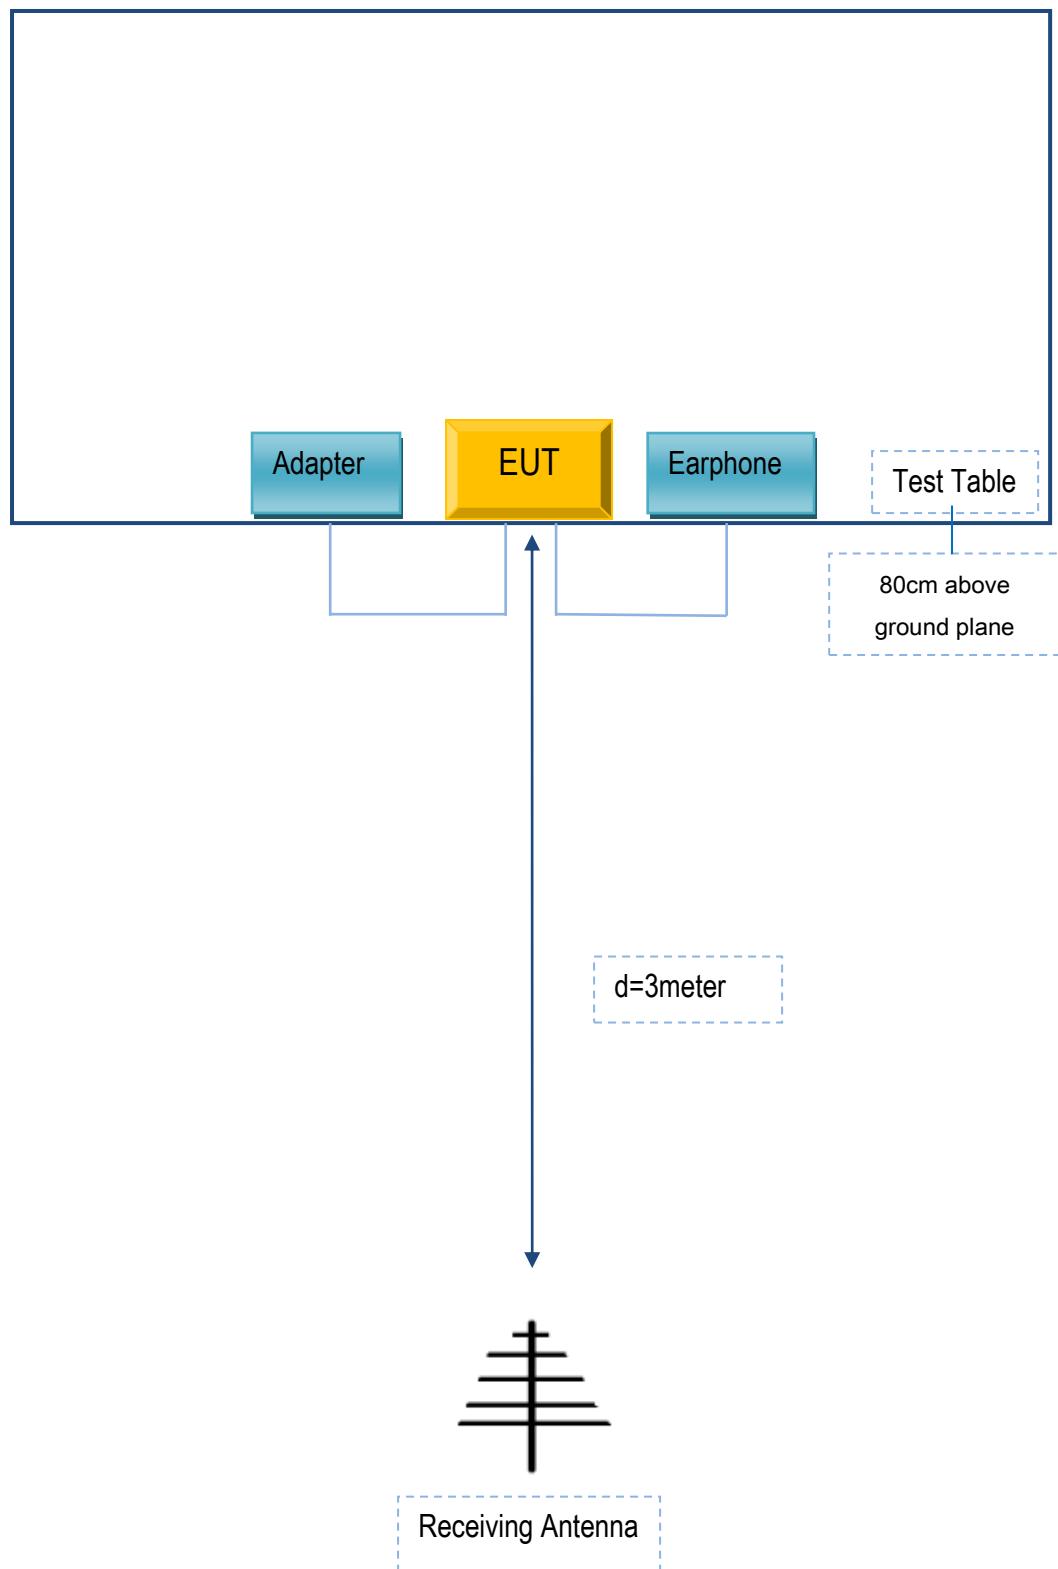

Block Configuration Diagram for Radiated Emissions ( Above 1GHz ) .

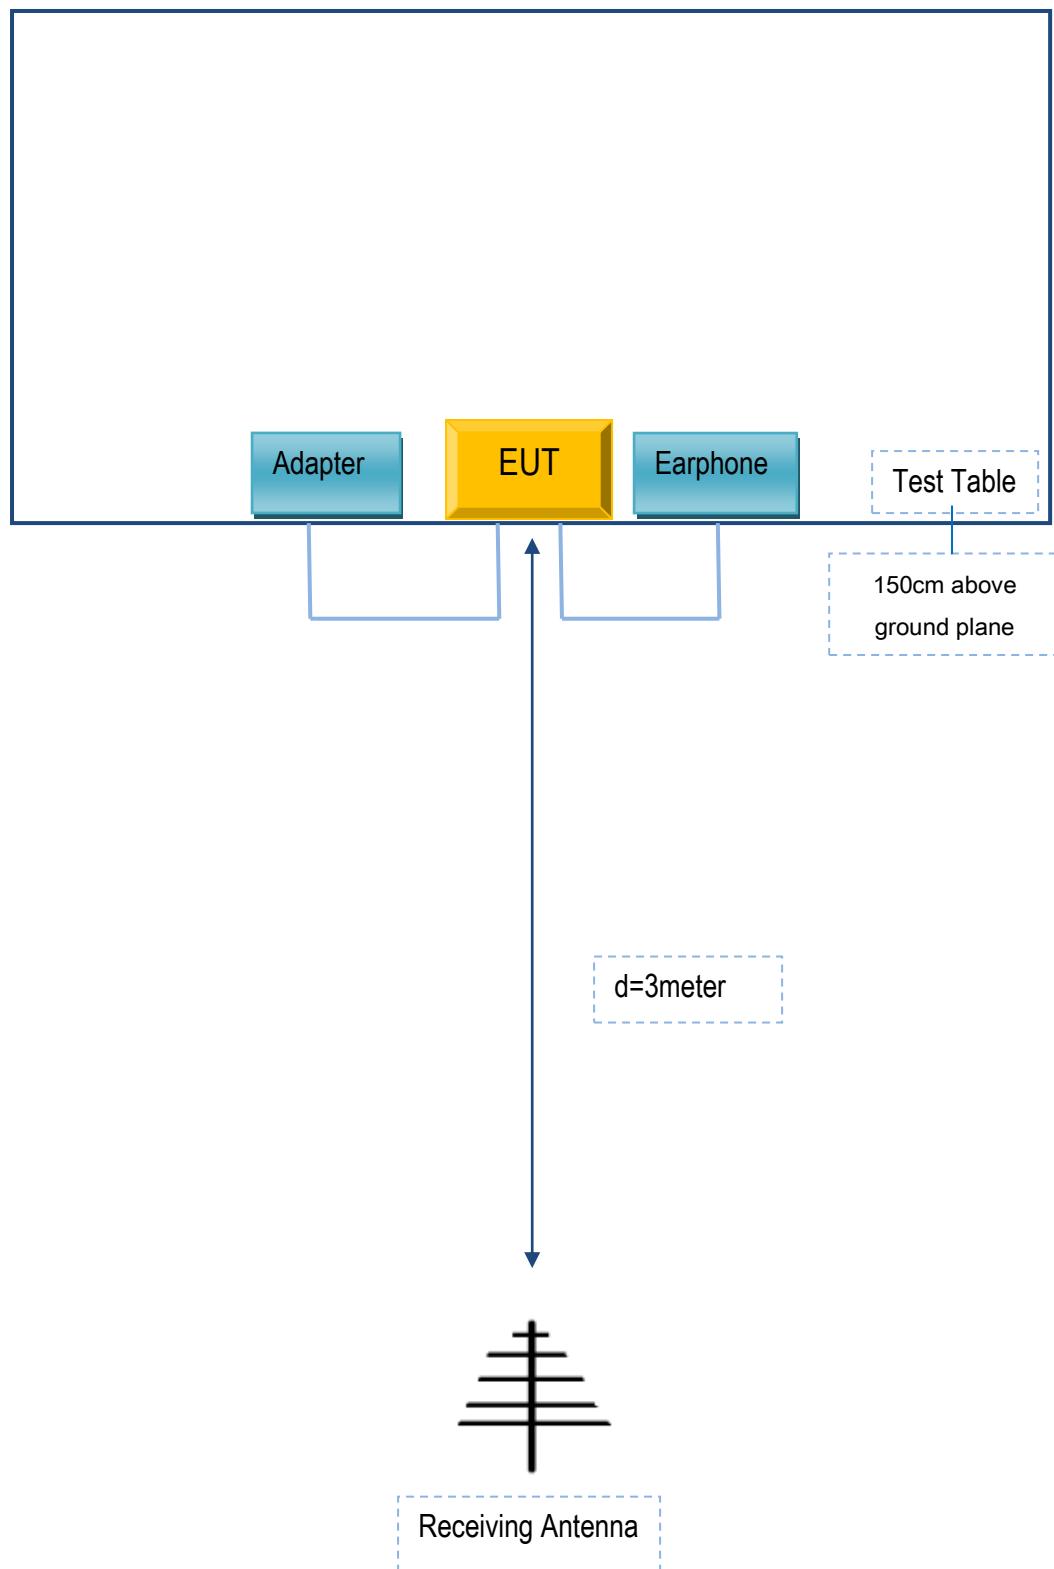

## Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

### Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
Power Idea Technology (Shenzhen) Co., Ltd.	Adapter	STC-A22O501500USBA-Z	1Y1703123320860
Power Idea Technology (Shenzhen) Co., Ltd.	Earphone	RG129	N/A

### Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	0.8m	N/A

## Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see the attachment

## Annex E. DECLARATION OF SIMILARITY

N/A