

FCC SAR EVALUATION REPORT

**In accordance with the requirements of
FCC 47 CFR Part 2(2.1093), ANSI/IEEE C95.1-1992 and
IEEE Std 1528-2013**

Product Name : LTE SMARTPHONE

Trademark : RugGear

Model Name : PSM01E

Family Model : RG725

Report No. : S20072200102001

FCC ID : ZLE-RG725

Prepared for

Power Idea Technology (Shenzhen) Co., Ltd.
4th Floor, A Section ,Languang Science&technology Xinxi RD, Hi-Tech Industrial
Park North, Nanshan ShenZhen, 518057 China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street,
Bao'an District, Shenzhen 518126 P.R.China.
Tel.: +86-755-6115 6588 Fax.: +86-755-6115 6599
Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION**Applicant's name**.....: Power Idea Technology (Shenzhen) Co., Ltd.Address.....: 4th Floor, A Section ,Languang Science&technology Xinxi RD,
Hi-Tech Industrial Park North, Nanshan ShenZhen, 518057 China**Manufacturer's Name**.....: RUGGEAR LIMITEDAddress.....: RM1301, 13/F WING TUCK COMM CTR 177-183 WING LOK ST
SHEUNG WAN Hong Kong**Product description**

Product name.....: LTE SMARTPHONE

Trademark: RugGear

Model Name: PSM01E

Family Model.....: RG725

FCC 47 CFR Part 2(2.1093)

ANSI/IEEE C95.1-1992

Standards.....: IEEE Std 1528-2013

Published RF exposure KDB procedures

This device described above has been tested by Shenzhen NTEK. In accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 and KDB 865664 D01. Testing has shown that this device is capable of compliance with localized specific absorption rate (SAR) specified in FCC 47 CFR Part 2(2.1093) and ANSI/IEEE C95.1-1992. The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.


This report shall not be reproduced except in full, without the written approval of Shenzhen NTEK, this document may be altered or revised by Shenzhen NTEK, personal only, and shall be noted in the revision of the document.

Date of TestDate (s) of performance of tests.....: Nov. 26, 2018 ~ Dec. 28, 2018
Aug. 07, 2020 ~ Aug. 08, 2020

Date of Issue: Aug. 12, 2020

Test Result: **Pass**

Note: A part of test data of this report are based on the original test report S18112300403E, dated by Jan. 02, 2019.

Prepared By : 
(Test Engineer) :
(Cheng Jiawen)

Approved By : 
(Lab Manager) :
(Sam Chen)

※ ※ Revision History ※ ※

REV.	DESCRIPTION	ISSUED DATE	REMARK
Rev.1.0	Initial Test Report Release (Report No.: S18112300403E)	Jan. 02, 2019	Cheng Jiawen
Rev.1.1	1. Add WCDMA Band II and LTE Band II 2. Add a Battery 3. Changed camera and RAM 4. Changed Model Name	Aug. 12, 2020	Cheng Jiawen

TABLE OF CONTENTS

1. General Information	6
1.1. RF exposure limits.....	6
1.2. Statement of Compliance	7
1.3. EUT Description	8
1.4. Test specification(s)	10
1.5. Ambient Condition.....	10
2. SAR Measurement System	11
2.1. SATIMO SAR Measurement Set-up Diagram	11
2.2. Robot	12
2.3. E-Field Probe.....	13
2.3.1. E-Field Probe Calibration	14
2.4. SAM phantoms	14
2.4.1. Technical Data	15
2.5. Device Holder	16
2.6. Test Equipment List	17
3. SAR Measurement Procedures	19
3.1. Power Reference	19
3.2. Area scan & Zoom scan.....	19
3.3. Description of interpolation/extrapolation scheme	21
3.4. Volumetric Scan	21
3.5. Power Drift	21
4. System Verification Procedure	22
4.1. Tissue Verification	22
4.1.1. Tissue Dielectric Parameter Check Results	23
4.2. System Verification Procedure	25
4.2.1. System Verification Results	26
5. SAR Measurement variability and uncertainty	27
5.1. SAR measurement variability.....	27
5.2. SAR measurement uncertainty	27
6. RF Exposure Positions	28
6.1. Ear and handset reference point	28
6.2. Definition of the cheek position	28
6.3. Definition of the tilt position	30
6.4. Body Worn Accessory	30
6.5. Wireless Router Devices	31
7. RF Output Power	32
7.1. Maximum Tune-up Limit.....	32
7.2. GSM Conducted Power	33
7.3. WCDMA Conducted Power	34

7.4.	LTE Conducted Power	35
7.5.	WLAN & Bluetooth Output Power	52
7.5.1.	Output Power Results Of WLAN 2.4G	52
7.5.2.	Output Power Results Of WLAN 5.2G	52
7.5.3.	Output Power Results Of WLAN 5.3G	53
7.5.4.	Output Power Results Of WLAN 5.6G	53
7.5.5.	Output Power Results Of WLAN 5.8G	54
7.5.6.	Output Power Results Of Bluetooth.....	54
8.	Antenna Location.....	55
9.	Stand-alone SAR test exclusion.....	56
10.	SAR Results	57
10.1.	SAR measurement results	57
10.1.1.	SAR measurement Result of GSM850.....	57
10.1.2.	SAR measurement Result of GSM1900.....	58
10.1.3.	SAR measurement Result of WCDMA Band V.....	59
10.1.4.	SAR measurement Result of WCDMA Band IV.....	60
10.1.5.	SAR measurement Result of LTE Band V	61
10.1.6.	SAR measurement Result of LTE Band IV	62
10.1.7.	SAR measurement Result of LTE Band VII	65
10.1.8.	SAR measurement Result of LTE Band XXXVIII	66
10.1.9.	SAR measurement Result of LTE Band XL A	68
10.1.10.	SAR measurement Result of LTE Band XL B.....	70
10.1.11.	SAR measurement Result of LTE Band XLI.....	71
10.1.12.	SAR measurement Result of WLAN 2.4G	73
10.1.13.	SAR measurement Result of WLAN 5.2G	74
10.1.14.	SAR measurement Result of WLAN 5.3G	74
10.1.15.	SAR measurement Result of WLAN 5.6G	75
10.1.16.	SAR measurement Result of WLAN 5.8G	75
10.1.17.	SAR measurement Result of WCDMA Band II.....	76
10.1.18.	SAR measurement Result of LTE Band II	76
10.2.	SAR Summation Scenario.....	78
11.	Appendix A. Photo documentation	103
12.	Appendix B. System Check Plots.....	104
13.	Appendix C. Plots of High SAR Measurement.....	149
14.	Appendix D. Calibration Certificate	222

1. General Information

1.1. RF exposure limits

(A).Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

(B).Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

NOTE: **Whole-Body SAR** is averaged over the entire body, **partial-body SAR** is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. **SAR for hands, wrists, feet and ankles** is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Occupational/Controlled Environments:

Are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

General Population/Uncontrolled Environments:

Are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

NOTE
 HEAD AND TRUNK LIMIT
 1.6 W/kg
 APPLIED TO THIS EUT

1.2. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for PSM01E are as follows.

Band	Max Reported SAR Value(W/kg)			
	1-g Head	1-g Body-Worn (Separation distance of 10mm)	1-g Hotspot (Separation distance of 10mm)	Max Simultaneous Tx
GSM 850	0.420	0.435	0.435	1.514
GSM 1900	0.283	1.014	1.014	
WCDMA Band V	0.237	0.262	0.262	
WCDMA Band IV	0.294	0.753	0.753	
LTE Band V	0.301	0.322	0.322	
LTE Band IV	0.427	1.109	1.109	
LTE Band VII	0.064	0.571	0.728	
LTE Band XXXVIII	0.114	0.382	0.382	
LTE Band XL A	0.083	0.398	0.398	
LTE Band XL B	0.060	0.244	0.244	
LTE Band XLI	0.211	0.692	0.692	
WLAN 2.4G	0.323	0.405	0.405	
WLAN 5.2G	0.634	0.272	N/A	
WLAN 5.3G	0.623	0.277	N/A	
WLAN 5.6G	0.442	0.192	N/A	
WLAN 5.8G	0.576	0.249	N/A	
WCDMA Band II	0.317	0.494	0.494	
LTE Band II	0.372	0.521	0.521	

Note: The Max Simultaneous Tx is calculated based on the same configuration and test position. This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR Part 2(2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE Std 1528-2013 & KDB 865664 D01.

1.3. EUT Description

Device Information			
Product Name	LTE SMARTPHONE		
Trade Name	RugGear		
Model Name	PSM01E		
Family Model	RG725		
FCC ID	ZLE-RG725		
Device Phase	Identical Prototype		
Exposure Category	General population / Uncontrolled environment		
Antenna	PIFA Antenna		
Battery Information	Battery 1: DC 3.8V, 5000mAh Battery 2: DC 3.6V, 3120mAh		
Device Operating Configurations			
Supporting Mode(s)	GSM 850/1900, WCDMA Band V/IV/II, LTE Band V/IV/VII/XXXVIII/XL/XLI/II, WLAN 2.4G/5G, Bluetooth		
Test Modulation	GSM(GMSK/8PSK), WCDMA(QPSK), LTE(QPSK/16QAM), WLAN(DSSS/OFDM), Bluetooth(GFSK, $\pi/4$ -DQPSK, 8DPSK)		
Device Class	B		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	GSM 850	824-849	869-894
	GSM 1900	1850-1910	1930-1990
	WCDMA Band V	824-849	869-894
	WCDMA Band IV	1710-1755	2110-2155
	WCDMA Band II	1850-1910	1930-1990
	LTE Band V	824-849	869-894
	LTE Band IV	1710-1755	2110-2155
	LTE Band VII	2500-2570	2620-2690
	LTE Band II	1850-1910	1930-1990
	LTE Band XXXVIII	2570-2620	
	LTE Band XL A	2305-2320	
	LTE Band XL B	2345-2360	
	LTE Band XLI	2496-2690	
	WLAN 2.4G	2412-2462	
	WLAN 5.2G	5180-5240	
	WLAN 5.3G	5260-5320	
	WLAN 5.6G	5500-5700	
	WLAN 5.8G	5745-5825	
	Bluetooth	2402-2480	
GPRS Multislot Class(12)	Max Number of Timeslots in Uplink		4

	Max Number of Timeslots in Downlink	4
	Max Total Timeslot	5
EDGE Multislot Class(12)	Max Number of Timeslots in Uplink	4
	Max Number of Timeslots in Downlink	4
	Max Total Timeslot	5
Power Class	4, tested with power level 5(GSM 850)	
	1, tested with power level 0(GSM 1900)	
	3, tested with power control "all 1"(WCDMA Band V)	
	3, tested with power control "all 1"(WCDMA Band IV)	
	3, tested with power control "all 1"(WCDMA Band II)	
	3, tested with power control all Max.(LTE Band II)	
	3, tested with power control all Max.(LTE Band V)	
	3, tested with power control all Max.(LTE Band IV)	
	3, tested with power control all Max.(LTE Band VII)	
	3, tested with power control all Max.(LTE Band XXXVIII)	
	3, tested with power control all Max.(LTE Band XL)	
	3, tested with power control all Max.(LTE Band XLI)	
Test Channels (low-mid-high)	128-189-251(GSM 850)	
	512-661-810(GSM 1900)	
	4132-4182-4233(WCDMA Band V)	
	1313-1413-1512 (WCDMA Band IV)	
	9262-9400-9538(WCDMA Band II)	
	18607-18900-19193(LTE Band II BW=1.4MHz)	
	18615-18900-19185(LTE Band II BW=3MHz)	
	18625-18900-19175(LTE Band II BW=5MHz)	
	18650-18900-19150(LTE Band II BW=10MHz)	
	18675-18900-19125(LTE Band II BW=15MHz)	
	18700-18900-19100(LTE Band II BW=20MHz)	
	20407-20525-20643(LTE Band V BW=1.4MHz)	
	20415-20525-20635(LTE Band V BW=3MHz)	
	20425-20525-20625(LTE Band V BW=5MHz)	
	20450-20525-20600(LTE Band V BW=10MHz)	
	19957-20175-20393(LTE Band IV BW=1.4MHz)	
	19965-20175-20385(LTE Band IV BW=3MHz)	
	19975-20175-20375(LTE Band IV BW=5MHz)	
	20000-20175-20350(LTE Band IV BW=10MHz)	
	20025-20175-20325(LTE Band IV BW=15MHz)	
	20050-20175-20300(LTE Band IV BW=20MHz)	
	20775-21100-21425(LTE Band VII BW=5MHz)	
	20800-21100-21400(LTE Band VII BW=10MHz)	

20825-21100-21375(LTE Band VII BW=15MHz)
20850-21100-21350(LTE Band VII BW=20MHz)
37775-38000-38225(LTE Band XXXVIII BW=5MHz)
37800-38000-38200(LTE Band XXXVIII BW=10MHz)
37825-38000-38175(LTE Band XXXVIII BW=15MHz)
37850-38000-38150(LTE Band XXXVIII BW=20MHz)
38725-38775-38825 (LTE Band XL A BW=5MHz)
38750-38775-38800 (LTE Band XL A BW=10MHz)
38775 (LTE Band XL A BW=15MHz)
39125-39175-39225 (LTE Band XL B BW=5MHz)
39150-39175-39200 (LTE Band XL B BW=10MHz)
39175 (LTE Band XL B BW=15MHz)
39675-40620-41565(LTE Band XLI BW=5MHz)
39700-40620-41540(LTE Band XLI BW=10MHz)
39725-40620-41515(LTE Band XLI BW=15MHz)
39750-40620-41490(LTE Band XLI BW=20MHz)
1-3-6-9-11(WLAN 2.4G)
36-38-40-46-48(WLAN 5.2G)
52-54-56-62-64(WLAN 5.3G)
100-102-110-116-134-140(WLAN 5.6G)
149-151-157-159-165(WLAN 5.8G)

1.4. Test specification(s)


FCC 47 CFR Part 2(2.1093)
ANSI/IEEE C95.1-1992
IEEE Std 1528-2013
KDB 865664 D01 SAR measurement 100 MHz to 6 GHz
KDB 865664 D02 RF Exposure Reporting
KDB 447498 D01 General RF Exposure Guidance
KDB 248227 D01 802.11 Wi-Fi SAR
KDB 941225 D01 3G SAR Procedures
KDB 941225 D05 SAR for LTE Devices
KDB 941225 D06 Hotspot SAR
KDB 648474 D04 Handset SAR

1.5. Ambient Condition

Ambient temperature	20°C – 24°C
Relative Humidity	30% – 70%

2. SAR Measurement System

2.1. SATIMO SAR Measurement Set-up Diagram

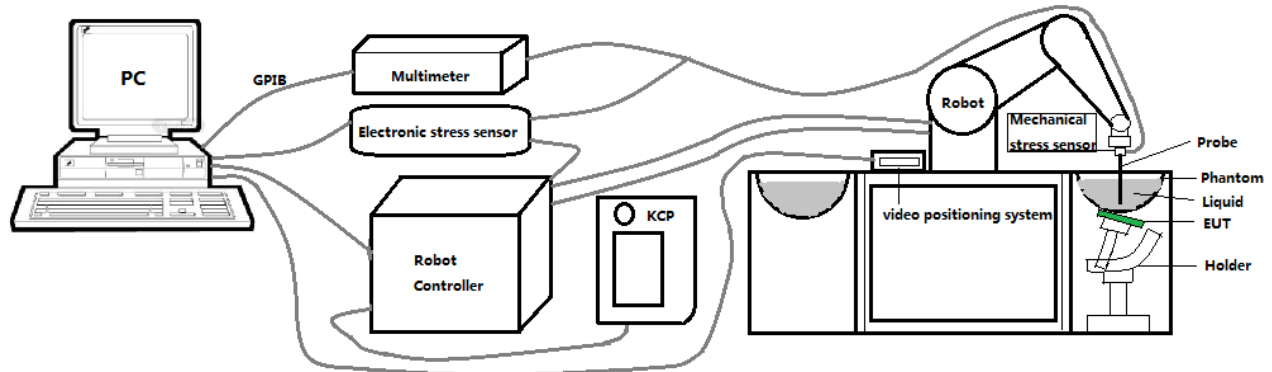

These measurements were performed with the automated near-field scanning system OPENSAR from SATIMO. The system is based on a high precision robot (working range: 901 mm), which positions the probes with a positional repeatability of better than ± 0.03 mm. The SAR measurements were conducted with dosimetric probe (manufactured by SATIMO), designed in the classical triangular configuration and optimized for dosimetric evaluation.

The first step of the field measurement is the evaluation of the voltages induced on the probe by the device under test. Probe diode detectors are nonlinear. Below the diode compression point, the output voltage is proportional to the square of the applied E-field; above the diode compression point, it is linear to the applied E-field. The compression point depends on the diode, and a calibration procedure is necessary for each sensor of the probe.

The Keithley multimeter reads the voltage of each sensor and send these three values to the PC. The corresponding E field value is calculated using the probe calibration factors, which are stored in the working directory. This evaluation includes linearization of the diode characteristics. The field calculation is done separately for each sensor. Each component of the E field is displayed on the "Dipole Area Scan Interface" and the total E field is displayed on the "3D Interface"

2.2. Robot

The SATIMO SAR system uses the high precision robots from KUKA. For the 6-axis controller system, the robot controller version (KUKA) from KUKA is used. The KUKA robot series have many features that are important for our application:



- High precision (repeatability ± 0.03 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

2.3. E-Field Probe

This E-field detection probe is composed of three orthogonal dipoles linked to special Schottky diodes with low detection thresholds. The probe allows the measurement of electric fields in liquids such as the one defined in the IEEE and CENELEC standards.

For the measurements the Specific Dosimetric E-Field Probe SN 08/16 EPGO287 with following specifications is used



- Dynamic range: 0.01-100 W/kg
 - Tip Diameter: 2.5 mm
 - Distance between probe tip and sensor center: 1 mm
 - Distance between sensor center and the inner phantom surface: 2 mm (repeatability better than ± 1 mm).
 - Probe linearity: ± 0.08 dB
 - Axial isotropy: 0.06 dB
 - Hemispherical Isotropy: 0.08 dB
 - Calibration range: 650MHz to 5900MHz for head & body simulating liquid.
 - Lower detection limit: 7mW/kg
- Angle between probe axis (evaluation axis) and surface normal line: less than 30° .

For the measurements the Specific Dosimetric E-Field Probe SN 07/15 EP247 with following specifications is used



- Dynamic range: 0.01-100 W/kg
 - Tip Diameter : 5 mm
 - Distance between probe tip and sensor center: 2.7 mm
 - Distance between sensor center and the inner phantom surface: 4 mm (repeatability better than ± 1 mm).
 - Probe linearity: ± 0.05 dB
 - Axial isotropy: < 0.25 dB
 - Hemispherical Isotropy: < 0.50 dB
 - Calibration range: 450MHz to 2600MHz for head & body simulating liquid.
 - Lower detection limit: 8mW/kg
- Angle between probe axis (evaluation axis) and surface normal line: less than 30° .

2.3.1. E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within $\pm 0.25\text{dB}$. The sensitivity parameters (Norm X, Norm Y, and Norm Z), the diode compression parameter (DCP) and the conversion factor (Conv F) of the probe are tested. The calibration data can be referred to appendix D of this report.

2.4. SAM phantoms


Photo of SAM phantom SN 16/15 SAM119



The SAM phantom is used to measure the SAR relative to people exposed to electro-magnetic field radiated by mobile phones.

2.4.1. Technical Data

Serial Number	Shell thickness	Filling volume	Dimensions	Positionner Material	Permittivity	Loss Tangent
SN 16/15 SAM119	2 mm $\pm$ 0.2 mm	27 liters	Length:1000 mm Width:500 mm Height:200 mm	Gelcoat with fiberglass	3.4	0.02

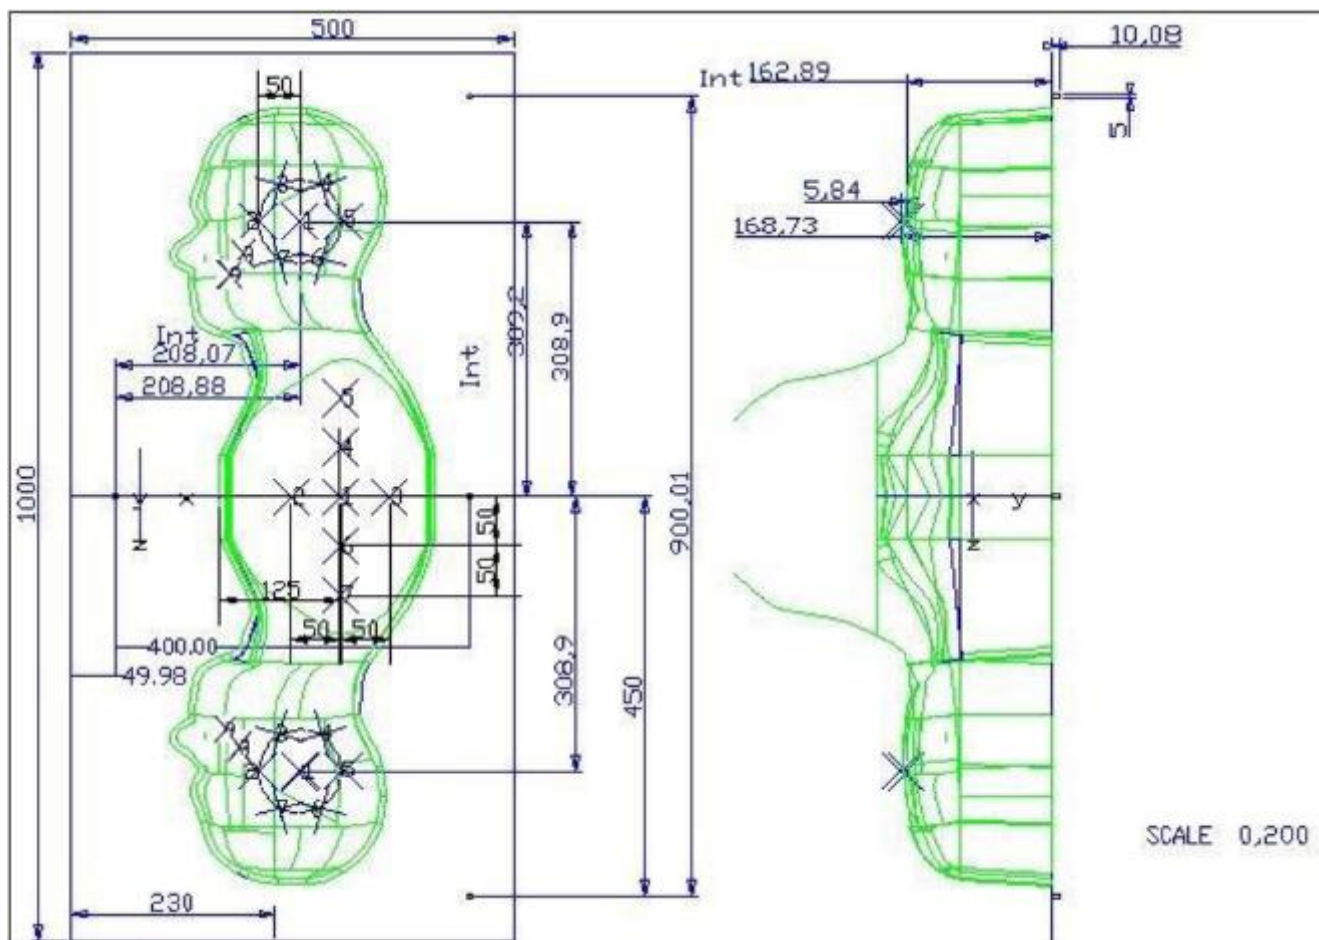


Serial Number	Left Head(mm)		Right Head(mm)		Flat Part(mm)	
SN 16/15 SAM119	2	2.02	2	2.08	1	2.09
	3	2.05	3	2.06	2	2.06
	4	2.07	4	2.07	3	2.08
	5	2.08	5	2.08	4	2.10
	6	2.05	6	2.07	5	2.10
	7	2.05	7	2.05	6	2.07
	8	2.07	8	2.06	7	2.07
	9	2.08	9	2.06	-	-

The test, based on ultrasonic system, allows measuring the thickness with an accuracy of 10 μ m.

2.5. Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1 degree.

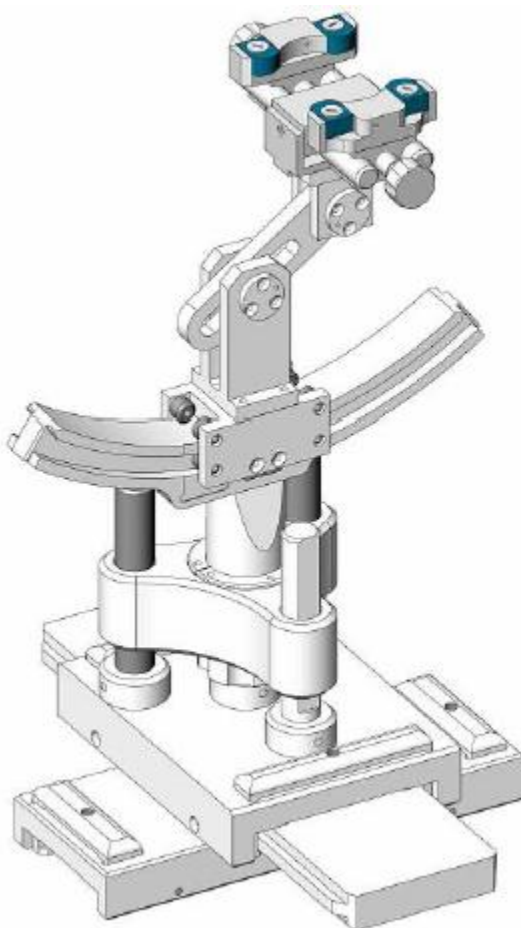

Serial Number	Holder Material	Permittivity	Loss Tangent
SN 16/15 MSH100	Delrin	3.7	0.005

2.6. Test Equipment List

This table gives a complete overview of the SAR measurement equipment.

Devices used during the test described are marked ☒

	Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
					Last Cal.	Due Date
☒	MVG	E FIELD PROBE	SSE2	SN 08/16 EPGO287	Sep. 17, 2018	Sep. 16, 2019
					Dec. 27, 2019	Dec. 26, 2020
☒	MVG	E FIELD PROBE	SSE5	SN 07/15 EP247	Apr. 06, 2018	Apr. 05, 2019
					Jan. 06, 2020	Jan. 05, 2021
☐	MVG	750 MHz Dipole	SID750	SN 03/15 DIP 0G750-355	Apr. 19, 2018	Apr. 18, 2021
☒	MVG	835 MHz Dipole	SID835	SN 03/15 DIP 0G835-347	Apr. 19, 2018	Apr. 18, 2021
☐	MVG	900 MHz Dipole	SID900	SN 03/15 DIP 0G900-348	Apr. 19, 2018	Apr. 18, 2021
☒	MVG	1800 MHz Dipole	SID1800	SN 03/15 DIP 1G800-349	Apr. 19, 2018	Apr. 18, 2021
☒	MVG	1900 MHz Dipole	SID1900	SN 03/15 DIP 1G900-350	Apr. 19, 2018	Apr. 18, 2021
☐	MVG	2000 MHz Dipole	SID2000	SN 03/15 DIP 2G000-351	Apr. 19, 2018	Apr. 18, 2021
☒	MVG	2300 MHz Dipole	SID2300	SN 03/16 DIP 2G300-358	Nov. 08, 2018	Nov. 07, 2021
☒	MVG	2450 MHz Dipole	SID2450	SN 03/15 DIP 2G450-352	Apr. 19, 2018	Apr. 18, 2021
☒	MVG	2600 MHz Dipole	SID2600	SN 03/15 DIP 2G600-356	Apr. 19, 2018	Apr. 18, 2021
☒	MVG	5000 MHz Dipole	SWG5500	SN 13/14 WGA 33	Apr. 19, 2018	Apr. 18, 2021
☒	MVG	Liquid measurement Kit	SCLMP	SN 21/15 OCPG 72	NCR	NCR
☒	MVG	Power Amplifier	N.A	AMPLISAR_28/14_003	NCR	NCR
☒	KEITHLEY	Millivoltmeter	2000	4072790	NCR	NCR
☒	R&S	Universal radio communication	CMU200	117858	Aug. 05, 2018	Aug. 04, 2019

		tester			Jul. 13, 2020	Jul. 12, 2021
☒	R&S	Wideband radio communication tester	CMW500	103917	Oct. 08, 2018	Oct. 07, 2019
					Jul. 13, 2020	Jul. 12, 2021
☒	HP	Network Analyzer	8753D	3410J01136	Aug. 05, 2018	Aug. 04, 2019
					Jul. 13, 2020	Jul. 12, 2021
☒	Agilent	PSG Analog Signal Generator	E8257D	MY51110112	Aug. 05, 2018	Aug. 04, 2019
					Jul. 13, 2020	Jul. 12, 2021
☒	Agilent	Power meter	E4419B	MY45102538	Aug. 05, 2018	Aug. 04, 2019
					Jul. 13, 2020	Jul. 12, 2021
☒	Agilent	Power sensor	E9301A	MY41495644	Aug. 05, 2018	Aug. 04, 2019
					Jul. 13, 2020	Jul. 12, 2021
☒	Agilent	Power sensor	E9301A	US39212148	Aug. 05, 2018	Aug. 04, 2019
					Jul. 13, 2020	Jul. 12, 2021
☒	MCLI/USA	Directional Coupler	CB11-20	0D2L51502	Aug. 05, 2018	Aug. 04, 2019
					Jul. 17, 2020	Jul. 16, 2023

3. SAR Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/Bluetooth power measurement, use engineering software to configure EUT WLAN/Bluetooth continuously transmission, at maximum RF power in each supported wireless interface and frequency band.
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/Bluetooth output power.

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/Bluetooth continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix A demonstrates.
- (c) Set scan area, grid size and other setting on the OPENSAR software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band.
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

3.1. Power Reference

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

3.2. Area scan & Zoom scan

The area scan is a 2D scan to find the hot spot location on the DUT. The zoom scan is a 3D scan above the hot spot to calculate the 1g and 10g SAR value.

Measurement of the SAR distribution with a grid of 8 to 16 mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8 * 4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that will not be within the zoom scan of other peaks; additional peaks shall be measured only when the primary peak is within 2 dB of the SAR compliance limit (e.g., 1 W/kg for 1,6 W/kg 1 g limit, or 1,26 W/kg for 2 W/kg, 10 g limit).

Area scan & Zoom scan scan parameters extracted from FCC KDB 865664 D01 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

* When zoom scan is required and the *reported* SAR from the *area scan based 1-g SAR estimation* procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

3.3. Description of interpolation/extrapolation scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimise measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1 mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensional scanned data array.

3.4. Volumetric Scan

The volumetric scan consists to a full 3D scan over a specific area. This 3D scan is useful form multi Tx SAR measurement. Indeed, it is possible with OpenSAR to add, point by point, several volumetric scan to calculate the SAR value of the combined measurement as it is define in the standard IEEE1528 and IEC62209.

3.5. Power Drift

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In OpenSAR measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in V/m. If the power drifts more than $\pm 5\%$, the SAR will be retested.

4. System Verification Procedure

4.1. Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% of weight)	Head Tissue									
Frequency Band (MHz)	750	835	900	1800	1900	2000	2450	2600	5200	5800
Water	34.40	34.40	34.40	55.36	55.36	57.87	57.87	57.87	65.53	65.53
NaCl	0.79	0.79	0.79	0.35	0.35	0.16	0.16	0.16	0.00	0.00
1,2-Propanediol	64.81	64.81	64.81	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Triton X-100	0.00	0.00	0.00	30.45	30.45	19.97	19.97	19.97	24.24	24.24
DGBE	0.00	0.00	0.00	13.84	13.84	22.00	22.00	22.00	10.23	10.23
Ingredients (% of weight)	Body Tissue									
Frequency Band (MHz)	750	835	900	1800	1900	2000	2450	2600	5200	5800
Water	50.30	50.30	50.30	69.91	69.91	71.88	71.88	71.88	79.54	79.54
NaCl	0.60	0.60	0.60	0.13	0.13	0.16	0.16	0.16	0.00	0.00
1,2-Propanediol	49.10	49.10	49.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Triton X-100	0.00	0.00	0.00	9.99	9.99	19.97	19.97	19.97	11.24	11.24
DGBE	0.00	0.00	0.00	19.97	19.97	7.99	7.99	7.99	9.22	9.22

4.1.1. Tissue Dielectric Parameter Check Results

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameter are within the tolerances of the specified target values. The measured conductivity and relative permittivity should be within $\pm 5\%$ of the target values.

Tissue Type	Measured Frequency (MHz)	Target Tissue		Measured Tissue		Liquid Temp.	Test Date
		$\epsilon_r (\pm 5\%)$	σ (S/m) ($\pm 5\%$)	ϵ_r	σ (S/m)		
Head 850	835	41.50 (39.43~43.57)	0.90 (0.86~0.94)	41.63	0.91	21.4 °C	Nov. 29, 2018
Body 850	835	55.20 (52.44~57.96)	0.97 (0.92~1.01)	54.80	0.97	21.2 °C	Nov. 26, 2018
Head 1800	1800	40.00 (38.00~42.00)	1.40 (1.33~1.47)	39.57	1.40	21.5 °C	Nov. 27, 2018
Body 1800	1800	53.30 (50.64~55.96)	1.52 (1.44~1.59)	53.68	1.53	21.8 °C	Dec. 04, 2018
Head 1900	1900	40.00 (38.00~42.00)	1.40 (1.33~1.47)	39.68	1.43	21.5 °C	Dec. 04, 2018
Body 1900	1900	53.30 (50.64~55.96)	1.52 (1.44~1.59)	54.04	1.52	21.5 °C	Dec. 04, 2018
Head 2300	2300	39.47 (37.50~41.44)	1.67 (1.59~1.75)	39.45	1.69	21.5 °C	Dec. 21, 2018
Head 2300	2300	52.90 (50.26~55.54)	1.81 (1.72~1.90)	52.48	1.79	21.4 °C	Dec. 21, 2018
Head 2450	2450	39.20 (37.24~41.16)	1.80 (1.71~1.89)	39.67	1.83	21.7 °C	Nov. 29, 2018
Body 2450	2450	52.70 (50.07~55.33)	1.95 (1.85~2.04)	52.10	1.96	21.6 °C	Nov. 28, 2018
Head 2600	2600	39.00 (37.05~40.95)	1.96 (1.86~2.05)	38.97	1.97	21.5 °C	Dec. 20, 2018
Body 2600	2600	52.50 (49.88~55.13)	2.16 (2.05~2.27)	53.17	2.17	21.5 °C	Dec. 10, 2018
Head 5000	5200	36.00 (34.20~37.80)	4.66 (4.43~4.89)	35.94	4.61	21.3 °C	Dec. 24, 2018
Body 5000	5200	49.00 (46.55~51.45)	5.30 (5.04~5.57)	49.91	5.27	21.5 °C	Dec. 26, 2018
Head 5000	5400	35.80 (34.01~37.59)	4.86 (4.62~5.10)	35.55	4.91	21.3 °C	Dec. 24, 2018
Body 5000	5400	48.70 (46.27~51.14)	5.53 (5.25~5.81)	49.58	5.49	21.5 °C	Dec. 26, 2018


Head 5000	5600	35.50 (33.73~37.28)	5.07 (4.82~5.32)	35.68	5.06	21.7 °C	Dec. 28, 2018
Body 5000	5600	48.50 (46.08~50.93)	5.77 (5.48~6.06)	49.91	5.67	21.2 °C	Dec. 27, 2018
Head 5000	5800	35.30 (33.54~37.07)	5.27 (5.01~5.53)	34.79	5.16	21.7 °C	Dec. 28, 2018
Body 5000	5800	48.20 (45.79~50.61)	6.00 (5.70~6.30)	48.59	6.03	21.2 °C	Dec. 27, 2018
Head 1900	1900	40.00 (38.00~42.00)	1.40 (1.33~1.47)	38.64	1.44	21.4 °C	Aug. 07, 2020
Body 1900	1900	53.30 (50.64~55.96)	1.52 (1.44~1.59)	54.25	1.53	21.4 °C	Aug. 08, 2020

NOTE: The dielectric parameters of the tissue-equivalent liquid should be measured under similar ambient conditions and within 2 °C of the conditions expected during the SAR evaluation to satisfy protocol requirements.

4.2. System Verification Procedure

The system verification is performed for verifying the accuracy of the complete measurement system and performance of the software. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 100mW (below 5GHz) or 100mW (above 5GHz). To adjust this power a power meter is used. The power sensor is connected to the cable before the system verification to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the system verification to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

The system verification is shown as below picture:

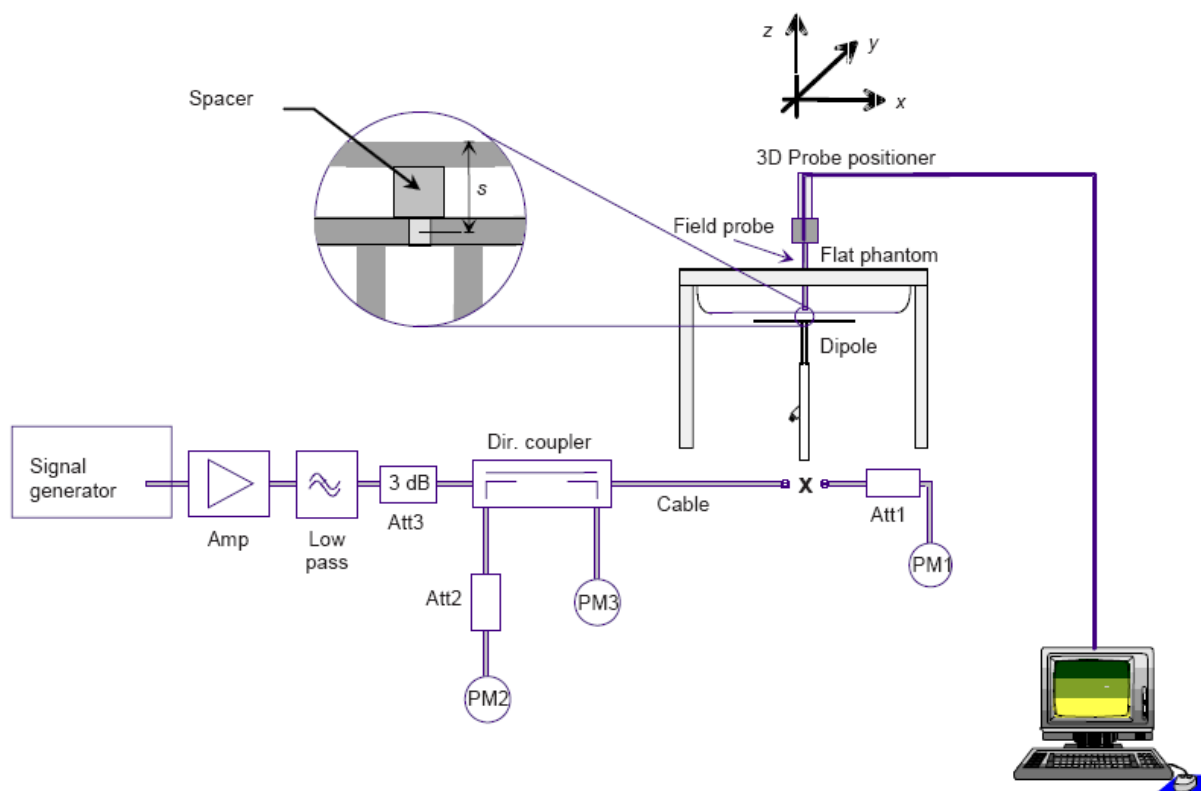

4.2.1. System Verification Results

Comparing to the original SAR value provided by SATIMO, the verification data should be within its specification of $\pm 10\%$. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance verification can meet the variation criterion and the plots can be referred to Appendix B of this report.

System Verification	Target SAR (1W) ($\pm 10\%$)		Measured SAR (Normalized to 1W)		Liquid Temp.	Test Date
	1-g (W/Kg)	10-g (W/Kg)	1-g (W/Kg)	10-g (W/Kg)		
835MHz Head	9.55 (8.60~10.51)	6.10 (5.49~6.71)	10.20	6.62	21.4 °C	Nov. 29, 2018
835MHz Body	9.83 (8.85~10.81)	6.45 (5.81~7.10)	9.90	6.54	21.2 °C	Nov. 26, 2018
1800MHz Head	38.11 (34.30~41.92)	20.05 (18.05~22.06)	40.91	20.95	21.5 °C	Nov. 27, 2018
1800MHz Body	38.13 (34.32~41.94)	20.65 (18.59~22.72)	36.28	19.60	21.8 °C	Dec. 04, 2018
1900MHz Head	38.92 (35.03~42.81)	20.09 (18.08~22.10)	42.09	21.57	21.5 °C	Dec. 04, 2018
1900MHz Body	39.02 (35.12~42.92)	20.57 (18.51~22.63)	41.80	21.40	21.5 °C	Dec. 04, 2018
2300MHz Head	48.70 (43.83~53.57)	23.30 (20.97~25.63)	48.53	23.05	21.5 °C	Dec. 21, 2018
2300MHz Body	45.57 (41.02~50.12)	21.27 (19.15~23.39)	45.61	21.16	21.4 °C	Dec. 21, 2018
2450MHz Head	53.76 (48.38~59.14)	24.12 (21.71~26.53)	54.31	23.83	21.7 °C	Nov. 29, 2018
2450MHz Body	52.90 (47.61~58.19)	24.09 (21.68~26.50)	51.99	23.01	21.6 °C	Nov. 28, 2018
2600MHz Head	55.60 (50.04~61.16)	24.60 (22.14~27.06)	56.17	26.89	21.5 °C	Dec. 20, 2018
2600MHz Body	52.49 (47.24~57.74)	23.74 (21.37~26.11)	53.50	23.61	21.5 °C	Dec. 10, 2018
5200MHz Head	160.94 (144.85~177.03)	55.97 (50.37~61.57)	154.54	54.51	21.3 °C	Dec. 24, 2018
5200MHz Body	156.85 (141.17~172.54)	55.20 (49.68~60.72)	149.12	55.13	21.5 °C	Dec. 26, 2018
5400MHz Head	166.40 (149.76~183.04)	58.43 (52.59~64.27)	164.54	58.51	21.3 °C	Dec. 24, 2018

5400MHz Body	163.97 (147.57~180.37)	57.26 (51.53~62.98)	169.12	58.13	21.5 °C	Dec. 26, 2018
5600MHz Head	173.80 (156.42~191.18)	59.97 (53.97~65.97)	169.10	59.44	21.7 °C	Dec. 28, 2018
5600MHz Body	166.58 (149.92~183.24)	57.87 (52.08~63.66)	166.56	57.82	21.2 °C	Dec. 27, 2018
5800MHz Head	184.13 (165.72~202.54)	62.74 (56.47~69.01)	179.21	59.44	21.7 °C	Dec. 28, 2018
5800MHz Body	169.30 (152.37~186.23)	58.49 (52.64~64.34)	159.14	55.17	21.2 °C	Dec. 27, 2018
1900MHz Head	38.92 (35.03~42.81)	20.09 (18.08~22.10)	42.09	21.57	21.4 °C	Aug. 07, 2020
1900MHz Body	39.02 (35.12~42.92)	20.57 (18.51~22.63)	41.80	21.40	21.4 °C	Aug. 08, 2020

5. SAR Measurement variability and uncertainty

5.1. SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

5.2. SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The

equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

6. RF Exposure Positions

6.1. Ear and handset reference point

Figure 6.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M”, the left ear reference point (ERP) is marked “LE”, and the right ERP is marked “RE”.



Fig 6.1.1 Front, back, and side views of SAM phantom

6.2. Definition of the cheek position

1. Define two imaginary lines on the handset, the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset: the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 6.2.1 and Figure 6.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 6.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 6.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
2. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
3. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP
4. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.

5. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
6. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 6.2.3. The actual rotation angles should be documented in the test report.

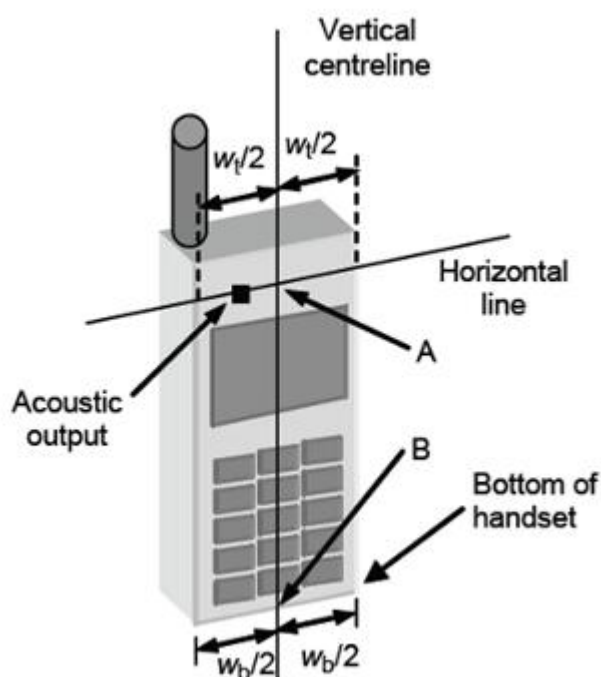


Fig 6.2.1 Handset vertical and horizontal reference lines—"fixed case"

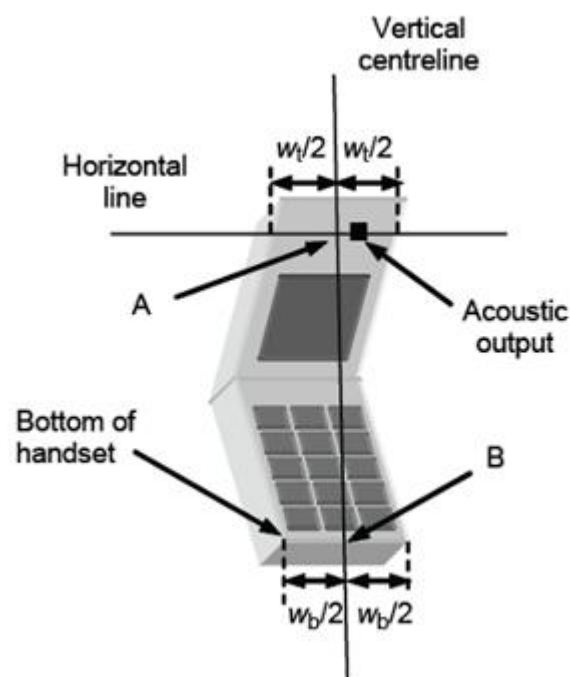


Fig 6.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

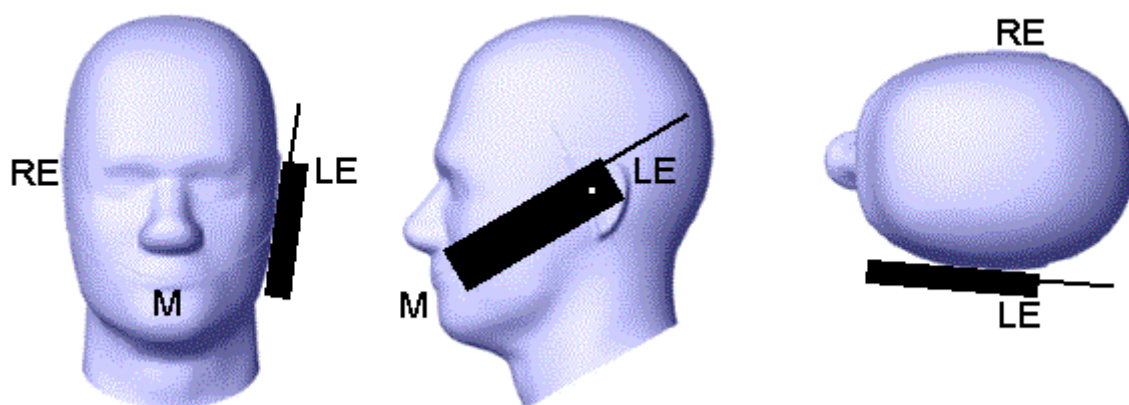


Fig 6.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

6.3. Definition of the tilt position

1. While maintaining the orientation of the handset, retract the handset parallel to the reference plane far enough away from the phantom to enable a rotation of the device by 15 degree.
2. Rotate the Handset around the horizontal line by 15 degree (see Figure 6.3.1).
3. While maintaining the orientation of the handset, move the handset towards the phantom on a line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna, e.g., the antenna with the back of the phantom head, the angle of the handset shall be reduced. In this case, the tilt position is obtained if any part of the handset is in contact with the pinna as well as a second part of the handset is in contact with the phantom, e.g., the antenna with the back of the head.

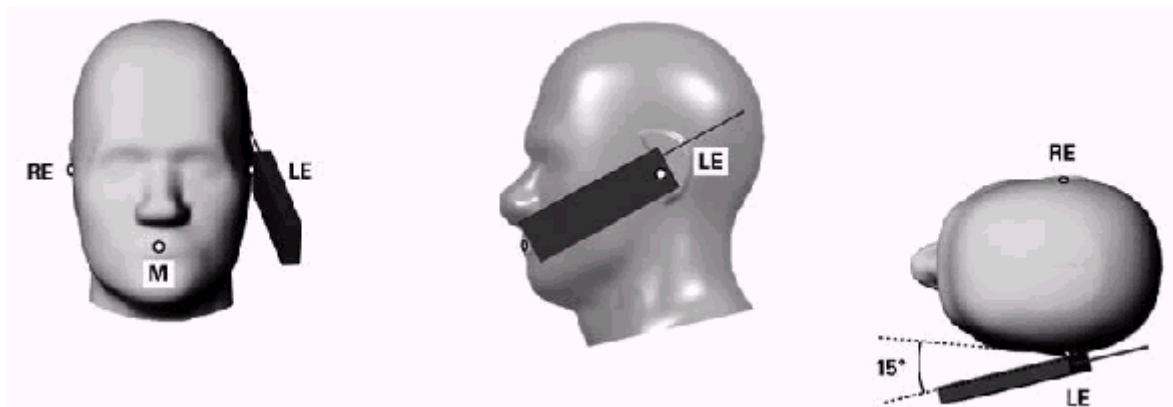


Figure 6.3.1 – Tilt position of the wireless device on the left side of SAM

6.4. Body Worn Accessory

1. Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 6.4.1). Per KDB 648474 D04, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $< 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.
2. Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest

spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

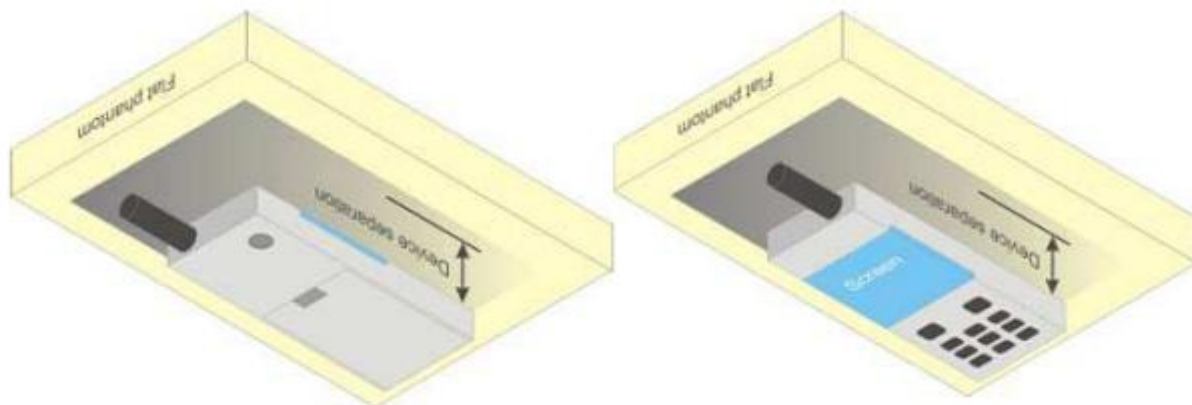


Figure 6.4.1 – Test positions for body-worn devices

6.5. Wireless Router Devices

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WLAN simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WLAN transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WLAN transmitter according to FCC KDB Publication 447498 D01 publication procedures. The “Portable Hotspot” feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

7. RF Output Power

7.1. Maximum Tune-up Limit

Band	Mode	The Tune-up Maximum Power (Customer Declared)(dBm)	Range	Measured Maximum Output Power(dBm)
GSM 850	GSM Voice	32±1	31~33	32.51
	GPRS	32±1	31~33	32.49
	EDGE	26±1	25~27	26.15
GSM 1900	GSM Voice	29±1	28~30	29.46
	GPRS	29±1	28~30	29.45
	EDGE	25±1	24~26	25.38
WCDMA Band V	RMC 12.2Kbps	21±1	20~22	21.76
	HSDPA	21±1	20~22	21.19
	HSUPA	21±1	20~22	21.15
WCDMA Band IV	RMC 12.2Kbps	22±1	21~23	22.77
	HSDPA	21±1	20~22	21.90
	HSUPA	21±1	20~22	21.86
WCDMA Band II	RMC 12.2Kbps	23±1	22~24	23.21
	HSDPA	22±1	21~23	22.31
	HSUPA	22±1	21~23	22.38
LTE Band II	QPSK	24±1	23~25	24.36
	16QAM	23±1	22~24	23.56
LTE Band V	QPSK	22.5±1	21.5~23.5	23.48
	16QAM	21.5±1	20.5~22.5	22.49
LTE Band IV	QPSK	22.5±1	21.5~23.5	23.47
	16QAM	21.5±1	20.5~22.5	22.50
LTE Band VII	QPSK	22±1	21~23	22.99
	16QAM	21±1	20~22	21.98
LTE Band XXXVIII	QPSK	22.5±1	21.5~23.5	23.39
	16QAM	21.5±1	20.5~22.5	22.36
LTE Band XL A	QPSK	22.5±1	21.5~23.5	23.45
	16QAM	21.5±1	20.5~22.5	22.47
LTE Band XL B	QPSK	22.5±1	21.5~23.5	23.49
	16QAM	21.5±1	20.5~22.5	22.49
LTE Band XLI	QPSK	21.5±1	20.5~22.5	22.21
	16QAM	21.5±1	20.5~22.5	22.21
WLAN 2.4G	802.11b	15±1	14~16	15.8
	802.11g	15±1	14~16	15.6

	802.11n20	15±1	14~16	15.7
	802.11n40	15±1	14~16	15.3
WLAN 5.2G	802.11a	15±1	14~16	15.3
	802.11n20	15±1	14~16	15.8
	802.11n40	13±1	12~14	12.8
	802.11ac20	13±1	12~14	13.5
	802.11ac40	13±1	12~14	13.3
WLAN 5.3G	802.11a	13±1	12~14	13.3
	802.11n20	13±1	12~14	13.1
	802.11n40	13±1	12~14	13.4
	802.11ac20	11±1	10~12	11.9
	802.11ac40	11±1	10~12	11.9
WLAN 5.6G	802.11a	12±1	11~13	12.6
	802.11n20	12±1	11~13	12.4
	802.11n40	12±1	11~13	12.8
	802.11ac20	11±1	10~12	11.2
	802.11ac40	11±1	10~12	11.6
WLAN 5.8G	802.11a	13±1	12~14	13.2
	802.11n20	13±1	12~14	13.1
	802.11n40	13±1	12~14	13.2
	802.11ac20	12±1	11~13	11.8
	802.11ac40	12±1	11~13	12.2
Bluetooth	BR	4.5±1	3.5~5.5	5.15
	EDR	4±1	3~5	4.86
	BLE	4.5±1	3.5~5.5	5.11

7.2. GSM Conducted Power

Band GSM850	Burst-Averaged output Power (dBm)				Frame-Averaged output Power (dBm)			
Tx Channel	Tune-up	128	189	251	Tune-up	128	189	251
Frequency (MHz)	(dBm)	824.2	836.4	848.8	(dBm)	824.2	836.4	848.8
GSM (GMSK)	33.00	32.41	32.49	32.51	23.97	23.38	23.46	23.48
GPRS(GMSK, 1 TS)	33.00	32.43	32.44	32.49	23.97	23.40	23.41	23.46
GPRS(GMSK, 2 TS)	32.00	31.58	31.64	31.75	25.98	25.56	25.62	25.73
GPRS(GMSK, 3 TS)	30.00	29.78	29.82	29.93	25.74	25.52	25.56	25.67
GPRS(GMSK, 4 TS)	29.00	28.59	28.68	28.79	25.99	25.58	25.67	25.78
EDGE(8PSK, 1 TS)	27.00	26.15	26.10	26.03	17.97	17.12	17.07	17.00
EDGE(8PSK, 2 TS)	25.00	24.91	24.87	24.85	18.98	18.89	18.85	18.83
EDGE(8PSK, 3 TS)	23.00	22.74	22.53	22.43	18.74	18.48	18.27	18.17
EDGE(8PSK, 4 TS)	22.00	21.23	21.15	21.22	18.99	18.22	18.14	18.21

Band GSM1900	Burst-Averaged output Power (dBm)				Frame-Averaged output Power (dBm)			
Tx Channel	Tune-up	512	661	810	Tune-up	512	661	810
Frequency (MHz)	(dBm)	1850.2	1880.0	1909.8	(dBm)	1850.2	1880.0	1909.8
GSM (GMSK)	30.00	29.35	29.45	29.46	20.97	20.32	20.42	20.43
GPRS(GMSK, 1 TS)	30.00	29.36	29.45	29.45	20.97	20.33	20.42	20.42
GPRS(GMSK, 2 TS)	29.00	28.57	28.70	28.71	22.98	22.55	22.68	22.69
GPRS(GMSK, 3 TS)	27.00	26.85	26.99	26.95	22.74	22.59	22.73	22.69
GPRS(GMSK, 4 TS)	26.00	25.80	25.97	25.97	22.99	22.79	22.96	22.96
EDGE(8PSK, 1 TS)	26.00	25.28	25.36	25.38	16.97	16.25	16.33	16.35
EDGE(8PSK, 2 TS)	24.00	23.62	23.67	23.80	17.98	17.60	17.65	17.78
EDGE(8PSK, 3 TS)	22.00	21.47	21.53	21.53	17.74	17.21	17.27	17.27
EDGE(8PSK, 4 TS)	21.00	20.15	20.28	20.35	17.99	17.14	17.27	17.34

Note: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 TS) - 9.03 dB

Frame-averaged power = Maximum burst averaged power (2 TS) - 6.02 dB

Frame-averaged power = Maximum burst averaged power (3 TS) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 TS) - 3.01 dB

7.3. WCDMA Conducted Power

Band	WCDMA Band V			
Tx Channel	Tune-up	4132	4182	4233
Frequency (MHz)		826.4	836.4	846.6
RMC 12.2Kbps	22.00	21.75	21.76	21.70
HSDPA Subtest-1	22.00	21.19	21.19	21.12
HSDPA Subtest-2	21.00	20.63	20.65	20.59
HSDPA Subtest-3	21.00	20.61	20.62	20.54
HSDPA Subtest-4	21.00	20.58	20.58	20.61
HSUPA Subtest-1	21.00	20.58	20.59	20.61
HSUPA Subtest-2	21.00	20.54	20.54	20.59
HSUPA Subtest-3	21.00	20.49	20.55	20.55
HSUPA Subtest-4	21.00	20.51	20.61	20.59
HSUPA Subtest-5	22.00	21.10	21.08	21.15
Band	WCDMA Band IV			
Tx Channel	Tune-up	1312	1413	1513
Frequency (MHz)		1712.4	1732.6	1752.6
RMC 12.2Kbps	23.00	22.71	22.77	22.74
HSDPA Subtest-1	22.00	21.80	21.86	21.90
HSDPA Subtest-2	21.00	20.78	20.79	20.72

HSDPA Subtest-3	21.00	20.71	20.73	20.71
HSDPA Subtest-4	21.00	20.61	20.64	20.65
HSUPA Subtest-1	21.00	20.55	20.59	20.60
HSUPA Subtest-2	21.00	20.70	20.79	20.74
HSUPA Subtest-3	21.00	20.82	20.86	20.88
HSUPA Subtest-4	21.00	20.81	20.85	20.89
HSUPA Subtest-5	22.00	21.81	21.83	21.86
Band	WCDMA Band II			
Tx Channel	Tune-up	9262	9400	9538
Frequency (MHz)		1852.4	1880	1907.6
RMC 12.2Kbps	24.00	23.03	23.21	23.17
HSDPA Subtest-1	23.00	22.12	22.16	22.31
HSDPA Subtest-2	22.00	21.66	21.59	21.79
HSDPA Subtest-3	21.00	20.42	20.45	20.85
HSDPA Subtest-4	21.00	20.43	20.92	20.82
HSUPA Subtest-1	22.00	21.61	21.81	21.91
HSUPA Subtest-2	23.00	21.98	22.15	22.18
HSUPA Subtest-3	22.00	20.88	20.89	21.15
HSUPA Subtest-4	23.00	22.16	22.26	22.38
HSUPA Subtest-5	22.00	21.28	21.39	21.28

7.4. LTE Conducted Power

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18607/1850.7	18900/1880	19193/1909.3
LTE Band II	1.4MHz	QPSK	1	0	25.00	23.83	23.78	24.06
			1	2	25.00	23.99	23.95	24.17
			1	5	25.00	23.83	23.77	24.04
			3	0	24.00	23.76	23.87	23.94
			3	1	24.00	23.78	23.86	23.98
			3	2	24.00	23.76	23.84	23.91
			6	0	24.00	22.78	22.86	23.07
		16QAM	1	0	24.00	22.79	22.91	22.72
			1	2	24.00	22.93	23.03	22.89
			1	5	24.00	22.81	22.90	22.72
			3	0	24.00	22.84	22.99	23.02
			3	1	24.00	22.89	23.02	23.02
			3	2	24.00	22.86	23.03	23.01

			6	0	23.00	21.88	21.93	22.10
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18615/1851.5	18900/1880	19185/1908.5
LTE Band II	3MHz	QPSK	1	0	25.00	23.79	23.81	24.02
			1	7	25.00	23.97	24.07	24.34
			1	14	25.00	23.71	23.78	24.06
			8	0	23.00	22.76	22.81	22.98
			8	4	23.00	22.76	22.85	23.00
			8	7	23.00	22.71	22.83	22.96
			15	0	23.00	22.67	22.79	22.91
		16QAM	1	0	24.00	23.04	22.92	22.74
			1	7	24.00	23.27	23.16	22.96
			1	14	24.00	23.00	22.89	22.72
			8	0	22.00	21.69	21.75	21.86
			8	4	22.00	21.70	21.78	21.90
			8	7	22.00	21.65	21.74	21.84
			15	0	22.00	21.65	21.68	21.89
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18625/1852.5	18900/1880	19175/1907.5
LTE Band II	5MHz	QPSK	1	0	25.00	23.68	23.74	23.87
			1	12	25.00	23.96	24.08	24.36
			1	24	25.00	23.71	23.74	23.93
			12	0	23.00	22.66	22.75	22.91
			12	6	23.00	22.75	22.81	22.96
			12	11	23.00	22.66	22.72	22.83
			25	0	23.00	22.70	22.78	22.88
		16QAM	1	0	24.00	22.88	22.96	23.18
			1	12	24.00	23.36	23.28	23.56
			1	24	24.00	22.87	22.92	23.22
			12	0	22.00	21.60	21.77	21.92
			12	6	22.00	21.65	21.81	21.89
			12	11	22.00	21.56	21.73	21.80
			25	0	22.00	21.63	21.69	21.82
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB	RB		18650/1855	18900/1880	19150/1905

			Size	Offset				
LTE Band II	10MHz	QPSK	1	0	25.00	23.81	23.86	23.90
			1	24	25.00	23.93	23.97	24.06
			1	49	25.00	23.75	23.83	24.03
			25	0	23.00	22.73	22.84	22.92
			25	12	23.00	22.70	22.82	22.88
			25	24	23.00	22.67	22.78	22.85
			50	0	23.00	22.68	22.80	22.90
		16QAM	1	0	24.00	22.56	23.15	22.93
			1	24	24.00	22.62	23.26	23.09
			1	49	24.00	22.51	23.11	22.99
			25	0	22.00	21.65	21.80	21.86
			25	12	22.00	21.65	21.78	21.81
			25	24	22.00	21.62	21.71	21.77
			50	0	22.00	21.60	21.78	21.81
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18675/1857.5	18900/1880	19125/1902.5
LTE Band II	15MHz	QPSK	1	0	25.00	23.73	23.76	23.84
			1	37	25.00	23.92	24.12	24.12
			1	74	25.00	23.61	23.73	23.90
			36	0	23.00	22.83	22.87	22.91
			36	18	23.00	22.78	22.88	22.97
			36	37	23.00	22.73	22.79	22.91
			75	0	23.00	22.80	22.84	22.97
		16QAM	1	0	24.00	22.74	23.03	22.90
			1	37	24.00	22.89	23.26	23.22
			1	74	24.00	22.71	23.05	22.91
			36	0	22.00	21.71	21.84	21.90
			36	18	22.00	21.67	21.87	21.95
			36	37	22.00	21.64	21.77	21.95
			75	0	22.00	21.69	21.79	21.85
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		18700/1860	18900/1880	19100/1900
LTE Band II	20MHz	QPSK	1	0	25.00	23.54	23.60	23.67
			1	49	25.00	23.85	23.95	24.01
			1	99	25.00	23.57	23.57	23.77

			50	0	23.00	22.68	22.84	22.91
			50	24	23.00	22.68	22.82	22.85
			50	49	23.00	22.69	22.71	22.81
			100	0	23.00	22.68	22.79	22.85
		16QAM	1	0	24.00	22.68	22.81	22.81
			1	49	24.00	22.99	23.12	23.11
			1	99	24.00	22.67	22.82	22.79
			50	0	22.00	21.69	21.84	21.83
			50	24	22.00	21.69	21.81	21.81
			50	49	22.00	21.66	21.73	21.73
			100	0	22.00	21.67	21.75	21.82

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20407/824.7	20525/836.5	20643/848.3
LTE Band V	1.4MHz	QPSK	1	0	23.50	23.43	23.02	23.02
			1	2	23.50	23.44	23.20	23.22
			1	5	23.50	23.31	22.97	23.02
			3	0	23.50	23.48	23.12	23.12
			3	1	23.50	23.41	23.25	23.15
			3	2	23.50	23.42	23.20	23.09
			6	0	22.50	22.43	22.15	22.13
		16QAM	1	0	22.50	21.99	22.01	22.08
			1	2	22.50	22.14	22.21	22.26
			1	5	22.50	22.00	22.07	22.06
			3	0	22.50	22.27	22.19	21.98
			3	1	22.50	22.25	22.21	22.19
			3	2	22.50	22.31	22.20	22.00
			6	0	21.50	21.15	21.06	21.15

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20415/825.5	20525/836.5	20635/847.5
LTE Band V	3MHz	QPSK	1	0	23.50	23.13	23.11	23.07
			1	7	23.50	23.05	23.09	23.07
			1	14	23.50	23.09	23.10	23.09
			8	0	22.50	22.10	22.13	22.08
			8	4	22.50	22.14	22.11	22.15
			8	7	22.50	22.10	22.12	22.14

		16QAM	15	0	22.50	22.10	22.09	22.09
			1	0	22.50	22.41	22.12	22.15
			1	7	22.50	22.43	22.05	22.13
			1	14	22.50	22.47	22.09	22.16
			8	0	21.50	21.27	21.22	21.05
			8	4	21.50	21.25	21.22	21.05
			8	7	21.50	21.26	21.21	21.07
			15	0	21.50	21.17	21.23	21.07

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20425/826.5	20525/836.5	20625/846.5
LTE Band V	5MHz	QPSK	1	0	23.50	23.02	23.01	23.02
			1	12	23.50	23.15	23.15	23.10
			1	24	23.50	23.04	23.00	22.98
			12	0	22.50	21.96	22.09	22.02
			12	6	22.50	22.11	22.05	22.08
			12	11	22.50	22.05	22.05	22.08
		16QAM	25	0	22.50	22.02	22.10	22.05
			1	0	22.50	21.90	22.05	22.29
			1	12	22.50	21.99	22.13	22.34
			1	24	22.50	21.89	22.07	22.17
			12	0	21.50	21.05	21.13	21.07
			12	6	21.50	21.13	21.15	21.12
			12	11	21.50	21.14	21.05	21.13
			25	0	21.50	21.11	21.17	21.05

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20450/829	20525/836.5	20600/844
LTE Band V	10MHz	QPSK	1	0	23.50	23.10	23.09	23.13
			1	24	23.50	23.28	23.29	23.23
			1	49	23.50	23.11	23.12	23.08
			25	0	22.50	22.07	22.23	22.09
			25	12	22.50	22.05	22.24	22.21
			25	24	22.50	22.06	22.14	22.20
			50	0	22.50	22.11	22.23	22.14
		16QAM	1	0	22.50	22.43	22.08	22.24
			1	24	22.50	22.44	22.25	22.34

			1	49	22.50	22.49	22.07	22.12
			25	0	21.50	21.14	21.33	21.14
			25	12	21.50	21.15	21.25	21.21
			25	24	21.50	21.17	21.22	21.21
			50	0	21.50	21.15	21.23	21.18

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		19957/1710.7	20175/1732.5	20393/1754.3
LTE Band IV	1.4MHz	QPSK	1	0	23.50	23.17	23.26	23.32
			1	2	23.50	23.40	23.46	23.46
			1	5	23.50	23.21	23.33	23.35
			3	0	23.50	23.37	23.47	23.45
			3	1	23.50	23.43	23.42	23.45
			3	2	23.50	23.36	23.45	23.47
			6	0	22.50	22.44	22.46	22.46
		16QAM	1	0	22.50	22.31	22.43	22.53
			1	2	22.50	22.48	22.69	22.71
			1	5	22.50	22.37	22.46	22.54
			3	0	22.50	22.41	22.45	22.41
			3	1	22.50	22.40	22.41	22.39
			3	2	22.50	22.44	22.44	22.44
			6	0	21.50	21.34	21.41	21.49

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		19965/1711.5	20175/1732.5	20385/1753.5
LTE Band IV	3MHz	QPSK	1	0	23.50	23.33	23.38	23.34
			1	7	23.50	23.33	23.36	23.34
			1	14	23.50	23.27	23.33	23.36
			8	0	22.50	22.42	22.47	22.45
			8	4	22.50	22.41	22.43	22.45
			8	7	22.50	22.35	22.44	22.43
			15	0	22.50	22.42	22.48	22.43
		16QAM	1	0	22.50	22.44	22.41	22.43
			1	7	22.50	22.38	22.46	22.46
			1	14	22.50	22.38	22.49	22.43
			8	0	21.50	21.46	21.43	21.40
			8	4	21.50	21.42	21.42	21.38

			8	7	21.50	21.44	21.41	21.33
			15	0	21.50	21.50	21.48	21.36

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		19975/1712.5	20175/1732.5	20375/1752.5
LTE Band IV	5MHz	QPSK	1	0	23.50	23.20	23.21	23.28
			1	12	23.50	23.31	23.34	23.38
			1	24	23.50	23.22	23.23	23.28
			12	0	22.50	22.42	22.40	22.43
			12	6	22.50	22.41	22.42	22.38
			12	11	22.50	22.35	22.44	22.39
			25	0	22.50	22.40	22.44	22.42
		16QAM	1	0	22.50	22.16	22.41	22.44
			1	12	22.50	22.26	22.50	22.43
			1	24	22.50	22.15	22.42	22.42
			12	0	21.50	21.40	21.40	21.49
			12	6	21.50	21.41	21.39	21.45
			12	11	21.50	21.36	21.43	21.44
			25	0	21.50	21.43	21.46	21.40

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20000/1715	20175/1732.5	20350/1750
LTE Band IV	10MHz	QPSK	1	0	23.50	23.25	23.34	23.29
			1	24	23.50	23.42	23.44	23.47
			1	49	23.50	23.30	23.36	23.31
			25	0	22.50	22.44	22.47	22.46
			25	12	22.50	22.38	22.45	22.46
			25	24	22.50	22.39	22.49	22.40
			50	0	22.50	22.48	22.43	22.43
		16QAM	1	0	22.50	22.46	22.14	22.20
			1	24	22.50	22.40	22.33	22.43
			1	49	22.50	22.45	22.15	22.23
			25	0	21.50	21.43	21.47	21.46
			25	12	21.50	21.42	21.46	21.45
			25	24	21.50	21.45	21.48	21.46
			50	0	21.50	21.49	21.47	21.41

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20025/1717.5	20175/1732.5	20325/1747.5
LTE Band IV	15MHz	QPSK	1	0	23.50	23.16	23.28	23.25
			1	37	23.50	23.26	23.39	23.33
			1	74	23.50	23.23	23.30	23.27
			36	0	22.50	22.43	22.48	22.39
			36	18	22.50	22.45	22.46	22.45
			36	37	22.50	22.48	22.46	22.43
			75	0	22.50	22.50	22.50	22.43
		16QAM	1	0	22.50	22.31	22.35	22.41
			1	37	22.50	22.39	22.37	22.35
			1	74	22.50	22.37	22.33	22.35
			36	0	21.50	21.42	21.44	21.43
			36	18	21.50	21.41	21.44	21.42
			36	37	21.50	21.40	21.42	21.43
			75	0	21.50	21.48	21.47	21.41
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20050/1720	20175/1732.5	20300/1745
LTE Band IV	20MHz	QPSK	1	0	23.50	23.09	23.12	23.23
			1	49	23.50	23.45	23.45	23.46
			1	99	23.50	23.17	23.07	23.21
			50	0	22.50	22.45	22.49	22.38
			50	24	22.50	22.45	22.48	22.39
			50	49	22.50	22.42	22.48	22.42
			100	0	22.50	22.46	22.47	22.36
		16QAM	1	0	22.50	22.17	22.48	22.18
			1	49	22.50	22.32	22.41	22.35
			1	99	22.50	22.29	22.45	22.16
			50	0	21.50	21.41	21.48	21.33
			50	24	21.50	21.45	21.43	21.35
			50	49	21.50	21.47	21.47	21.39
			100	0	21.50	21.45	21.47	21.37

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20775/2502.5	21100/2535	21425/2567.5
LTE Band VII	5MHz	QPSK	1	0	23.00	22.43	22.60	22.73
			1	12	23.00	22.63	22.77	22.92
			1	24	23.00	22.42	22.62	22.75
			12	0	22.00	21.53	21.69	21.83
			12	6	22.00	21.59	21.68	21.79
			12	11	22.00	21.57	21.73	21.77
			25	0	22.00	21.58	21.75	21.83
		16QAM	1	0	22.00	21.69	21.41	21.74
			1	12	22.00	21.91	21.61	21.91
			1	24	22.00	21.76	21.47	21.75
			12	0	21.00	20.60	20.70	20.81
			12	6	21.00	20.65	20.68	20.76
			12	11	21.00	20.65	20.69	20.73
			25	0	21.00	20.61	20.76	20.83
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20800/2505	21100/2535	21400/2565
LTE Band VII	10MHz	QPSK	1	0	23.00	22.56	22.73	22.82
			1	24	23.00	22.72	22.97	22.87
			1	49	23.00	22.59	22.82	22.86
			25	0	22.00	21.64	21.77	21.92
			25	12	22.00	21.65	21.78	21.95
			25	24	22.00	21.75	21.79	21.89
			50	0	22.00	21.73	21.80	21.88
		16QAM	1	0	22.00	21.95	21.69	21.90
			1	24	22.00	21.93	21.91	21.92
			1	49	22.00	21.84	21.74	21.94
			25	0	21.00	20.73	20.83	20.87
			25	12	21.00	20.75	20.82	20.85
			25	24	21.00	20.79	20.82	20.89
			50	0	21.00	20.74	20.80	20.83

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20825/2507.5	21100/2535	21375/2562.5
LTE Band VII	15MHz	QPSK	1	0	23.00	22.53	22.75	22.77
			1	37	23.00	22.68	22.83	22.99
			1	74	23.00	22.64	22.76	22.83
			36	0	22.00	21.70	21.90	22.00
			36	18	22.00	21.59	21.85	21.92
			36	37	22.00	21.80	21.84	21.95
			75	0	22.00	21.78	21.96	21.94
		16QAM	1	0	22.00	21.95	21.96	21.85
			1	37	22.00	21.80	21.87	21.87
			1	74	22.00	21.91	21.98	21.91
			36	0	21.00	20.67	20.81	20.92
			36	18	21.00	20.69	20.85	20.95
			36	37	21.00	20.78	20.83	20.94
			75	0	21.00	20.71	20.84	20.94
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		20850/2510	21100/2535	21350/2560
LTE Band VII	20MHz	QPSK	1	0	23.00	22.62	22.52	22.53
			1	49	23.00	22.83	22.92	22.96
			1	99	23.00	22.38	22.52	22.63
			50	0	22.00	21.62	21.75	21.83
			50	24	22.00	21.65	21.75	21.76
			50	49	22.00	21.71	21.72	21.76
			100	0	22.00	21.61	21.74	21.80
		16QAM	1	0	22.00	21.90	21.60	21.80
			1	49	22.00	21.98	21.95	21.85
			1	99	22.00	21.90	21.68	21.86
			50	0	21.00	20.64	20.72	20.74
			50	24	21.00	20.65	20.68	20.75
			50	49	21.00	20.70	20.67	20.70
			100	0	21.00	20.64	20.70	20.75

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		37775/2572.5	38000/2595	38225/2617.5
LTE Band XXXVIII	5MHz	QPSK	1	0	23.50	22.96	22.87	22.81
			1	12	23.50	23.10	23.05	22.98
			1	24	23.50	22.97	22.85	22.80
			12	0	22.50	21.98	21.92	21.81
			12	6	22.50	21.94	21.91	21.78
			12	11	22.50	21.93	21.88	21.75
			25	0	22.50	21.99	21.92	21.81
		16QAM	1	0	22.50	21.99	21.82	21.81
			1	12	22.50	22.16	21.99	21.91
			1	24	22.50	21.97	21.82	21.76
			12	0	21.50	21.05	20.96	20.86
			12	6	21.50	20.98	20.81	20.79
			12	11	21.50	21.00	20.89	20.82
			25	0	21.50	21.03	20.92	20.88
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		37800/2575	38000/2595	38200/2615
LTE Band XXXVIII	10MHz	QPSK	1	0	23.50	23.10	23.09	23.03
			1	24	23.50	23.36	23.39	23.29
			1	49	23.50	23.11	23.10	22.97
			25	0	22.50	22.07	22.04	21.91
			25	12	22.50	21.94	21.91	21.88
			25	24	22.50	21.99	21.99	21.86
			50	0	22.50	22.04	22.00	21.92
		16QAM	1	0	22.50	21.92	22.08	21.74
			1	24	22.50	22.21	22.36	21.98
			1	49	22.50	21.91	22.13	21.70
			25	0	21.50	21.09	21.06	20.97
			25	12	21.50	20.98	20.99	20.88
			25	24	21.50	21.01	20.98	20.90
			50	0	21.50	21.08	21.04	20.94

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		37825/2577.5	38000/2595	38175/2612.5
LTE Band XXXVIII	15MHz	QPSK	1	0	23.50	23.01	23.09	23.01
			1	37	23.50	23.07	23.18	22.97
			1	74	23.50	22.96	22.99	22.84
			36	0	22.50	22.19	22.14	22.07
			36	18	22.50	22.09	22.08	21.99
			36	37	22.50	22.12	22.09	22.01
			75	0	22.50	22.18	22.13	22.07
		16QAM	1	0	22.50	22.05	21.89	21.65
			1	37	22.50	22.07	21.96	21.65
			1	74	22.50	21.89	21.78	21.47
			36	0	21.50	21.11	21.14	20.98
			36	18	21.50	21.08	21.05	20.93
			36	37	21.50	21.06	21.09	20.91
			75	0	21.50	21.07	21.06	20.98
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		37850/2580	38000/2595	38150/2610
LTE Band XXXVIII	20MHz	QPSK	1	0	23.50	22.91	22.87	22.71
			1	49	23.50	23.36	23.38	23.12
			1	99	23.50	22.89	22.81	22.66
			50	0	22.50	22.08	22.06	21.98
			50	24	22.50	22.01	22.02	21.93
			50	49	22.50	21.97	21.95	21.85
			100	0	22.50	22.06	21.95	21.89
		16QAM	1	0	22.50	21.93	21.85	21.52
			1	49	22.50	22.35	22.26	22.01
			1	99	22.50	21.86	21.75	21.49
			50	0	21.50	21.08	21.06	21.04
			50	24	21.50	21.05	21.01	21.00
			50	49	21.50	21.02	20.94	20.85
			100	0	21.50	21.06	20.96	20.91

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		38725/2307.5	38775/2312.5	38825/2317.5
LTE Band XL A	5MHz	QPSK	1	0	23.50	23.34	23.28	23.26
			1	12	23.50	23.45	23.37	23.35
			1	24	23.50	23.33	23.23	23.27
			12	0	22.50	22.32	22.28	22.32
			12	6	22.50	22.31	22.25	22.29
			12	11	22.50	22.30	22.25	22.23
			25	0	22.50	22.36	22.32	22.32
		16QAM	1	0	22.50	22.44	22.32	22.37
			1	12	22.50	22.47	22.45	22.46
			1	24	22.50	22.45	22.30	22.38
			12	0	21.50	21.33	21.38	21.37
			12	6	21.50	21.32	21.35	21.30
			12	11	21.50	21.30	21.27	21.26
			25	0	21.50	21.28	21.27	21.34
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		38750/2310	38775/2312.5	38800/2315
LTE Band XL A	10MHz	QPSK	1	0	23.50	22.97	22.99	22.91
			1	24	23.50	23.22	23.23	23.19
			1	49	23.50	22.94	22.92	23.00
			25	0	22.50	21.97	21.97	22.04
			25	12	22.50	21.96	21.91	21.91
			25	24	22.50	21.79	21.82	21.78
			50	0	22.50	21.88	21.87	21.88
		16QAM	1	0	22.50	21.84	22.10	21.87
			1	24	22.50	22.08	22.38	22.14
			1	49	22.50	21.80	22.06	21.95
			25	0	21.50	21.39	20.95	20.94
			25	12	21.50	21.06	20.85	20.93
			25	24	21.50	20.93	20.80	20.75
			50	0	21.50	20.84	20.83	20.83

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)
			RB Size	RB Offset		38775/2312.5
LTE Band XL A	15MHz	QPSK	1	0	23.50	23.18
			1	37	23.50	23.21
			1	74	23.50	23.13
			36	0	22.50	22.27
			36	18	22.50	22.19
			36	37	22.50	22.11
			75	0	22.50	22.11
		16QAM	1	0	22.50	22.23
			1	37	22.50	22.38
			1	74	22.50	22.13
			36	0	21.50	21.21
			36	18	21.50	21.20
			36	37	21.50	21.08
			75	0	21.50	21.08

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		39125/2347.5	39175/2352.5	39225/2357.5
LTE Band XL B	5MHz	QPSK	1	0	23.50	23.49	23.45	23.45
			1	12	23.50	23.45	23.45	23.46
			1	24	23.50	23.46	23.47	23.43
			12	0	22.50	22.42	22.43	22.43
			12	6	22.50	22.39	22.41	22.42
			12	11	22.50	22.44	22.46	22.46
			25	0	22.50	22.48	22.48	22.48
		16QAM	1	0	22.50	22.42	22.34	22.28
			1	12	22.50	22.48	22.42	22.40
			1	24	22.50	22.40	22.27	22.24
			12	0	21.50	21.44	21.39	21.46
			12	6	21.50	21.41	21.39	21.45
			12	11	21.50	21.43	21.43	21.47
			25	0	21.50	21.43	21.44	21.45

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		39150/2350	39175/2352.5	39200/2355
LTE Band XL B	10MHz	QPSK	1	0	23.50	23.27	23.32	23.28
			1	24	23.50	23.48	23.45	23.44
			1	49	23.50	23.26	23.40	23.24
			25	0	22.50	22.50	22.42	22.48
			25	12	22.50	22.38	22.48	22.49
			25	24	22.50	22.50	22.42	22.42
			50	0	22.50	22.49	22.45	22.50
		16QAM	1	0	22.50	22.49	22.45	22.43
			1	24	22.50	22.37	22.46	22.30
			1	49	22.50	22.36	22.37	22.40
			25	0	21.50	21.46	21.48	21.49
			25	12	21.50	21.48	21.49	21.39
			25	24	21.50	21.48	21.49	21.45
			50	0	21.50	21.45	21.48	21.46
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		39175/2352.5		
LTE Band XL B	15MHz	QPSK	1	0	23.50	23.42		
			1	37	23.50	23.44		
			1	74	23.50	23.42		
			36	0	22.50	22.46		
			36	18	22.50	22.35		
			36	37	22.50	22.45		
			75	0	22.50	22.48		
		16QAM	1	0	22.50	22.48		
			1	37	22.50	22.38		
			1	74	22.50	22.44		
			36	0	21.50	21.49		
			36	18	21.50	21.45		
			36	37	21.50	21.41		
			75	0	21.50	21.46		

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		39675/2498.5	40620/2593	41565/2687.5
LTE Band XLI	5MHz	QPSK	1	0	22.50	22.00	22.17	22.17
			1	12	22.50	21.95	22.15	22.18
			1	24	22.50	21.99	22.17	22.19
			12	0	22.50	21.97	22.18	22.20
			12	6	22.50	21.98	22.18	22.21
			12	11	22.50	22.00	22.19	22.20
			25	0	22.50	21.94	22.19	22.21
		16QAM	1	0	22.50	22.16	22.20	22.21
			1	12	22.50	22.16	22.16	22.20
			1	24	22.50	22.15	22.18	22.19
			12	0	22.50	22.16	22.20	22.18
			12	6	22.50	22.16	22.20	22.17
			12	11	22.50	22.17	22.19	22.17
			25	0	22.50	22.17	22.20	21.68
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		39700/2501	40620/2593	41540/2685
LTE Band XLI	10MHz	QPSK	1	0	22.50	22.14	21.75	21.74
			1	24	22.50	21.84	21.75	21.76
			1	49	22.50	21.76	21.72	21.74
			25	0	22.50	21.71	21.75	21.76
			25	12	22.50	21.73	21.76	21.75
			25	24	22.50	21.74	21.77	21.74
			50	0	22.50	21.74	21.74	21.75
		16QAM	1	0	22.50	21.78	21.76	21.75
			1	24	22.50	21.72	21.76	21.74
			1	49	22.50	21.73	21.76	21.73
			25	0	22.50	21.73	21.72	21.75
			25	12	22.50	21.73	21.74	21.73
			25	24	22.50	21.73	21.76	21.72
			50	0	22.50	21.73	21.77	21.75

Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		39725/2503.5	40620/2593	41515/2682.5
LTE Band XLI	15MHz	QPSK	1	0	22.50	21.76	21.81	21.78
			1	37	22.50	21.77	21.80	21.80
			1	74	22.50	21.79	21.76	21.80
			36	0	22.50	21.80	21.78	21.77
			36	18	22.50	21.79	21.78	21.78
			36	37	22.50	21.78	21.78	21.79
			75	0	22.50	21.78	21.79	21.78
		16QAM	1	0	22.50	21.79	21.78	21.80
			1	37	22.50	21.77	21.78	21.78
			1	74	22.50	21.78	21.79	21.78
			36	0	22.50	21.79	21.80	21.78
			36	18	22.50	21.79	21.78	21.78
			36	37	22.50	21.79	21.77	21.78
			75	0	22.50	21.79	21.77	21.78
Band	Band Width	Modulation	RB Configuration		Tune-up	Channel/Frequency(MHz)		
			RB Size	RB Offset		39750/2506	40620/2593	41490/2680
LTE Band XLI	20MHz	QPSK	1	0	22.50	21.68	21.68	21.69
			1	49	22.50	21.68	21.69	21.68
			1	99	22.50	21.68	21.68	21.70
			50	0	22.50	21.69	21.68	21.70
			50	24	22.50	21.68	21.68	21.69
			50	49	22.50	21.68	21.68	21.69
			100	0	22.50	21.69	21.68	21.66
		16QAM	1	0	22.50	21.66	21.66	21.67
			1	49	22.50	21.68	21.68	21.66
			1	99	22.50	21.66	21.68	21.67
			50	0	22.50	21.66	21.67	21.67
			50	24	22.50	21.66	21.68	21.70
			50	49	22.50	21.67	21.70	21.72
			100	0	22.50	21.68	21.66	21.68

7.5. WLAN & Bluetooth Output Power

7.5.1. Output Power Results Of WLAN 2.4G

Mode	Channel	Frequency (MHz)	Tune-up	Output Power (dBm)
802.11b	1	2412	16.0	15.1
	6	2437	16.0	15.3
	11	2462	16.0	15.8
802.11g	1	2412	16.0	15.0
	6	2437	16.0	15.0
	11	2462	16.0	15.6
802.11n (20M)	1	2412	16.0	15.0
	6	2437	16.0	14.9
	11	2462	16.0	15.7
802.11n (40M)	3	2422	16.0	15.2
	6	2437	16.0	15.3
	9	2452	16.0	15.2

7.5.2. Output Power Results Of WLAN 5.2G

Mode	Channel	Frequency (MHz)	Tune-up	Output Power (dBm)
802.11a	36	5180	16.0	15.3
	40	5200	16.0	15.0
	48	5240	16.0	14.9
802.11n (20M)	36	5180	16.0	15.8
	40	5200	16.0	15.0
	48	5240	16.0	15.0
802.11n (40M)	38	5190	14.0	12.8
	46	5230	14.0	12.6
802.11ac (20M)	36	5180	14.0	13.5
	40	5200	14.0	13.4
	48	5240	14.0	12.9
802.11ac (40M)	38	5190	14.0	13.3
	46	5230	14.0	13.3

7.5.3. Output Power Results Of WLAN 5.3G

Mode	Channel	Frequency (MHz)	Tune-up	Output Power (dBm)
802.11a	52	5260	14.0	12.7
	56	5280	14.0	13.1
	64	5320	14.0	13.3
802.11n (20M)	52	5260	14.0	12.9
	56	5280	14.0	13.0
	64	5320	14.0	13.1
802.11n (40M)	54	5270	14.0	13.4
	62	5310	14.0	13.2
802.11ac (20M)	52	5260	12.0	11.8
	56	5280	12.0	11.6
	64	5320	12.0	11.9
802.11ac (40M)	54	5270	12.0	11.9
	62	5310	12.0	11.7

7.5.4. Output Power Results Of WLAN 5.6G

Mode	Channel	Frequency (MHz)	Tune-up	Output Power (dBm)
802.11a	100	5500	13.0	12.4
	116	5580	13.0	12.5
	140	5700	13.0	12.6
802.11n (20M)	100	5500	13.0	12.2
	116	5580	13.0	12.4
	140	5700	13.0	12.4
802.11n (40M)	102	5510	13.0	12.3
	110	5550	13.0	12.2
	134	5670	13.0	12.8
802.11ac (20M)	100	5500	12.0	11.1
	116	5580	12.0	11.0
	140	5700	12.0	11.2
802.11ac (40M)	102	5510	12.0	11.2
	110	5550	12.0	11.3
	134	5670	12.0	11.6

7.5.5. Output Power Results Of WLAN 5.8G

Mode	Channel	Frequency (MHz)	Tune-up	Output Power (dBm)
802.11a	149	5745	14.0	13.2
	157	5785	14.0	13.1
	165	5825	14.0	13.2
802.11n (20M)	149	5745	14.0	13.1
	157	5785	14.0	12.9
	165	5825	14.0	12.3
802.11n (40M)	151	5755	14.0	13.2
	159	5795	14.0	12.9
802.11ac (20M)	149	5745	13.0	11.8
	157	5785	13.0	11.6
	165	5825	13.0	11.6
802.11ac (40M)	151	5755	13.0	12.2
	159	5795	13.0	11.8


7.5.6. Output Power Results Of Bluetooth

BR+EDR	Output Power (dBm)				
	Channel	Tune-up	Data Rates		
			0CH	39CH	78CH
	1M	5.50	3.91	5.15	4.69
	2M	5.00	3.11	4.30	3.71
	3M	5.00	3.51	4.86	4.37

BLE	Channel	Tune-up	Output Power (dBm)
	0CH	5.50	3.69
	19CH	5.50	5.11
	39CH	5.50	4.57

8. Antenna Location

Right Side

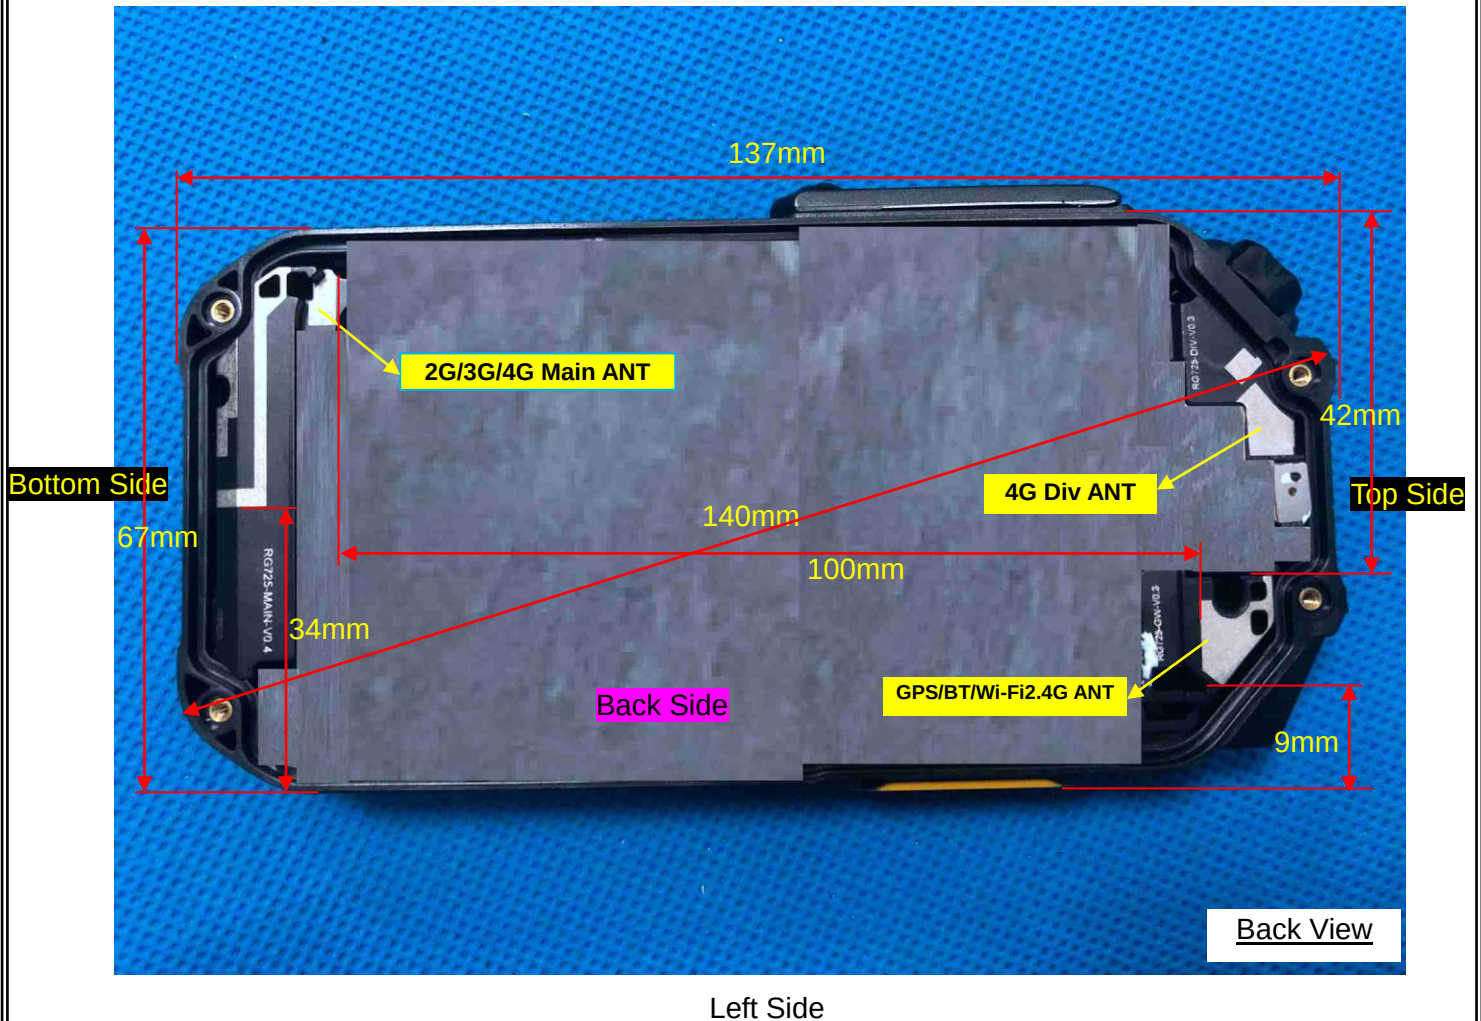

Left Side

Distance of the Antenna to the EUT surface/edge						
Antennas	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
WWAN Main	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm	≤ 25mm
WLAN & Bluetooth	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	>25mm
Positions for SAR tests						
Antennas	Front Side	Back Side	Left Side	Right Side	Top Side	Bottom Side
WWAN Main	Yes	Yes	NO	Yes	NO	Yes
WLAN & Bluetooth	Yes	Yes	Yes	NO	Yes	NO

9. Stand-alone SAR test exclusion

Refer to FCC KDB 447498D01, the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f_{\text{(GHz)}}}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where:

- $f_{\text{(GHz)}}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	P_{max} (dBm)	P_{max} (mW)	Distance (mm)	f (GHz)	Calculation Result	SAR Exclusion threshold	SAR test exclusion
Bluetooth	5.5	3.55	5	2.480	1.12	3.0	Yes

NOTE: Standalone SAR test exclusion for Bluetooth

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f_{\text{(GHz)}}}/x] \text{ W/kg}$ for test separation distances $\leq 50\text{mm}$, where $x = 7.5$ for 1-g SAR and $x = 18.75$ for 10-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Mode	Position	P_{max} (dBm)	P_{max} (mW)	Distance (mm)	f (GHz)	x	Estimated SAR (W/Kg)
Bluetooth	Head	5.5	3.55	5	2.480	7.5	0.149
Bluetooth	Body	5.5	3.55	10	2.480	7.5	0.075
Bluetooth	Hotspot	5.5	3.55	10	2.480	7.5	0.075

NOTE: Estimated SAR calculation for Bluetooth

10. SAR Results

10.1. SAR measurement results

10.1.1. SAR measurement Result of GSM850

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Left Cheek	189/836.4	GPRS(GMSK 4TS)	0.390	0.287	1.98	28.68	29.00	0.420
Left Tilt 15 Degree	189/836.4	GPRS(GMSK 4TS)	0.112	0.058	-1.12	28.68	29.00	0.121
Right Cheek	189/836.4	GPRS(GMSK 4TS)	0.289	0.156	0.58	28.68	29.00	0.311
Right Tilt 15 Degree	189/836.4	GPRS(GMSK 4TS)	0.117	0.051	-12.50	28.68	29.00	0.126

NOTE: Head SAR test results of GSM850.

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	189/836.4	GPRS(GMSK 4TS)	0.320	0.243	2.05	28.68	29.00	0.344
Back Side	189/836.4	GPRS(GMSK 4TS)	0.404	0.224	-3.37	28.68	29.00	0.435

NOTE: Body-Worn SAR test results of GSM850

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	189/836.4	GPRS(GMSK 4TS)	0.320	0.243	2.05	28.68	29.00	0.344
Back Side	189/836.4	GPRS(GMSK 4TS)	0.404	0.224	-3.37	28.68	29.00	0.435
Right Side	189/836.4	GPRS(GMSK 4TS)	0.049	0.025	0.56	28.68	29.00	0.053
Bottom Side	189/836.4	GPRS(GMSK 4TS)	0.221	0.135	0.57	28.68	29.00	0.238

NOTE: Hotspot SAR test results of GSM850

10.1.2. SAR measurement Result of GSM1900

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Left Cheek	661/1880	GPRS(GMSK 4TS)	0.281	0.165	-0.87	25.97	26.00	0.283
Left Tilt 15 Degree	661/1880	GPRS(GMSK 4TS)	0.106	0.051	-1.13	25.97	26.00	0.107
Right Cheek	661/1880	GPRS(GMSK 4TS)	0.250	0.132	0.58	25.97	26.00	0.252
Right Tilt 15 Degree	661/1880	GPRS(GMSK 4TS)	0.117	0.062	-2.13	25.97	26.00	0.118

NOTE: Head SAR test results of GSM1900

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	661/1880	GPRS(GMSK 4TS)	0.525	0.298	-1.20	25.97	26.00	0.529
Back Side	661/1880	GPRS(GMSK 4TS)	1.007	0.547	-1.90	25.97	26.00	1.014
Back Side - Repeated	661/1880	GPRS(GMSK 4TS)	0.975	0.514	-2.13	25.97	26.00	0.982
Back Side	512/1850.2	GPRS(GMSK 4TS)	0.835	0.461	0.68	25.80	26.00	0.874
Back Side	810/1909.8	GPRS(GMSK 4TS)	0.942	0.502	0.89	25.97	26.00	0.949

NOTE: Body-Worn SAR test results of GSM1900

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	661/1880	GPRS(GMSK 4TS)	0.525	0.298	-1.20	25.97	26.00	0.529
Back Side	661/1880	GPRS(GMSK 4TS)	1.007	0.547	-1.90	25.97	26.00	1.014
Back Side - Repeated	661/1880	GPRS(GMSK 4TS)	0.975	0.514	-2.13	25.97	26.00	0.982
Right Side	661/1880	GPRS(GMSK 4TS)	0.213	0.114	0.89	25.97	26.00	0.214
Bottom Side	661/1880	GPRS(GMSK 4TS)	0.323	0.175	0.56	25.97	26.00	0.325
Back Side	512/1850.2	GPRS(GMSK 4TS)	0.835	0.461	0.68	25.80	26.00	0.874
Back Side	810/1909.8	GPRS(GMSK 4TS)	0.942	0.502	0.89	25.97	26.00	0.949

NOTE: Hotspot SAR test results of GSM1900

10.1.3. SAR measurement Result of WCDMA Band V

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Left Cheek	4182/836.4	RMC12.2K	0.224	0.171	0.83	21.76	22.00	0.237
Left Tilt 15 Degree	4182/836.4	RMC12.2K	0.095	0.053	-1.13	21.76	22.00	0.100
Right Cheek	4182/836.4	RMC12.2K	0.196	0.150	0.58	21.76	22.00	0.207
Right Tilt 15 Degree	4182/836.4	RMC12.2K	0.069	0.038	0.58	21.76	22.00	0.073

NOTE: Head SAR test results of WCDMA Band V

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	4182/836.4	RMC12.2K	0.193	0.147	1.08	21.76	22.00	0.204
Back Side	4182/836.4	RMC12.2K	0.248	0.141	2.86	21.76	22.00	0.262

NOTE: Body-Worn SAR test results of WCDMA Band V

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	4182/836.4	RMC12.2K	0.193	0.147	1.08	21.76	22.00	0.204
Back Side	4182/836.4	RMC12.2K	0.248	0.141	2.86	21.76	22.00	0.262
Right Side	4182/836.4	RMC12.2K	0.041	0.025	0.58	21.76	22.00	0.043
Bottom Side	4182/836.4	RMC12.2K	0.126	0.075	-2.65	21.76	22.00	0.133

NOTE: Hotspot SAR test results of WCDMA Band V

10.1.4. SAR measurement Result of WCDMA Band IV

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Left Cheek	1413/1732.6	RMC12.2K	0.279	0.179	0.96	22.77	23.00	0.294
Left Tilt 15 Degree	1413/1732.6	RMC12.2K	0.187	0.129	0.26	22.77	23.00	0.197
Right Cheek	1413/1732.6	RMC12.2K	0.259	0.159	1.24	22.77	23.00	0.273
Right Tilt 15 Degree	1413/1732.6	RMC12.2K	0.175	0.117	3.07	22.77	23.00	0.185

NOTE: Head SAR test results of WCDMA Band IV

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	1413/1732.6	RMC12.2K	0.246	0.163	0.32	22.77	23.00	0.259
Back Side	1413/1732.6	RMC12.2K	0.714	0.432	-1.00	22.77	23.00	0.753

NOTE: Body-Worn SAR test results of WCDMA Band IV

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	1413/1732.6	RMC12.2K	0.246	0.163	0.32	22.77	23.00	0.259
Back Side	1413/1732.6	RMC12.2K	0.714	0.432	-1.00	22.77	23.00	0.753
Right Side	1413/1732.6	RMC12.2K	0.302	0.179	-2.07	22.77	23.00	0.318
Bottom Side	1413/1732.6	RMC12.2K	0.219	0.144	0.10	22.77	23.00	0.231

NOTE: Hotspot SAR test results of WCDMA Band IV

10.1.5. SAR measurement Result of LTE Band V

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Left Cheek	20525/836.5	10M QPSK(1,24)	0.287	0.217	3.85	23.29	23.50	0.301
Left Tilt 15 Degree	20525/836.5	10M QPSK(1,24)	0.131	0.085	-2.13	23.29	23.50	0.137
Right Cheek	20525/836.5	10M QPSK(1,24)	0.248	0.190	4.71	23.29	23.50	0.260
Right Tilt 15 Degree	20525/836.5	10M QPSK(1,24)	0.110	0.068	0.74	23.29	23.50	0.115
50%RB								
Left Cheek	20525/836.5	1.4M QPSK(3,1)	0.207	0.157	2.43	23.25	23.50	0.219
Left Tilt 15 Degree	20525/836.5	1.4M QPSK(3,1)	0.078	0.043	-1.51	23.25	23.50	0.083
Right Cheek	20525/836.5	1.4M QPSK(3,1)	0.185	0.140	2.11	23.25	23.50	0.196
Right Tilt 15 Degree	20525/836.5	1.4M QPSK(3,1)	0.071	0.035	0.31	23.25	23.50	0.075

NOTE: Head SAR test results of LTE Band V

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	20525/836.5	10M QPSK(1,24)	0.153	0.085	-2.31	23.29	23.50	0.161
Back Side	20525/836.5	10M QPSK(1,24)	0.307	0.171	-1.23	23.29	23.50	0.322
50%RB								
Front Side	20525/836.5	1.4M QPSK(3,1)	0.086	0.052	-1.13	23.25	23.50	0.091

Back Side	20525/836.5	1.4M QPSK(3,1)	0.222	0.123	0.77	23.25	23.50	0.235
-----------	-------------	----------------	-------	-------	------	-------	-------	-------

NOTE: Body-Worn SAR test results of LTE Band V

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	20525/836.5	10M QPSK(1,24)	0.153	0.085	-2.31	23.29	23.50	0.161
Back Side	20525/836.5	10M QPSK(1,24)	0.307	0.171	-1.23	23.29	23.50	0.322
Right Side	20525/836.5	10M QPSK(1,24)	0.058	0.029	-1.13	23.29	23.50	0.061
Bottom Side	20525/836.5	10M QPSK(1,24)	0.121	0.075	0.29	23.29	23.50	0.127
50%RB								
Front Side	20525/836.5	1.4M QPSK(3,1)	0.086	0.052	-1.13	23.25	23.50	0.091
Back Side	20525/836.5	1.4M QPSK(3,1)	0.222	0.123	0.77	23.25	23.50	0.235
Right Side	20525/836.5	1.4M QPSK(3,1)	0.045	0.027	0.23	23.25	23.50	0.048
Bottom Side	20525/836.5	1.4M QPSK(3,1)	0.104	0.060	-1.64	23.25	23.50	0.110

NOTE: Hotspot SAR test results of LTE Band V

10.1.6. SAR measurement Result of LTE Band IV

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Left Cheek	20175/1732.5	20M QPSK(1,49)	0.422	0.264	0.16	23.45	23.50	0.427
Left Tilt 15 Degree	20175/1732.5	20M QPSK(1,49)	0.135	0.078	-1.23	23.45	23.50	0.137

Right Cheek	20175/1732.5	20M QPSK(1,49)	0.284	0.143	0.54	23.45	23.50	0.287
Right Tilt 15 Degree	20175/1732.5	20M QPSK(1,49)	0.086	0.051	0.32	23.45	23.50	0.087
50%RB								
Left Cheek	20175/1732.5	1.4M QPSK(3,0)	0.343	0.213	0.43	23.47	23.50	0.345
Left Tilt 15 Degree	20175/1732.5	1.4M QPSK(3,0)	0.114	0.065	-1.12	23.47	23.50	0.115
Right Cheek	20175/1732.5	1.4M QPSK(3,0)	0.205	0.124	0.57	23.47	23.50	0.206
Right Tilt 15 Degree	20175/1732.5	1.4M QPSK(3,0)	0.081	0.050	-2.41	23.47	23.50	0.082

NOTE: Head SAR test results of LTE Band IV

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	20175/1732.5	20M QPSK(1,49)	0.534	0.331	-1.15	23.45	23.50	0.540
Back Side	20175/1732.5	20M QPSK(1,49)	1.096	0.697	0.42	23.45	23.50	1.109
Back Side - Repeated	20175/1732.5	20M QPSK(1,49)	1.054	0.684	1.53	23.45	23.50	1.066
Back Side	20050/1720	20M QPSK(1,49)	1.068	0.686	-0.02	23.45	23.50	1.080
Back Side	20300/1745	20M QPSK(1,49)	1.059	0.614	-1.15	23.46	23.50	1.069
50%RB								
Front Side	20175/1732.5	1.4M QPSK(3,0)	0.415	0.283	-2.21	23.47	23.50	0.418
Back Side	20175/1732.5	1.4M QPSK(3,0)	0.951	0.466	-3.05	23.47	23.50	0.958
Back Side - Repeated	20175/1732.5	1.4M QPSK(3,0)	0.894	0.467	0.54	23.47	23.50	0.900
Back Side	20050/1720	1.4M QPSK(3,0)	0.765	0.347	-2.13	23.37	23.50	0.788
Back Side	20300/1745	1.4M QPSK(3,0)	0.787	0.359	-1.15	23.45	23.50	0.796
100%RB								

Back Side	20175/1732. 5	20M QPSK(100,0)	0.795	0.432	-1.64	22.47	22.50	0.801
-----------	------------------	--------------------	-------	-------	-------	-------	-------	-------

NOTE: Body-Worn SAR test results of LTE Band IV

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conduc ted power (dBm)	Tune-u p power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	20175/1732. 5	20M QPSK(1,49)	0.534	0.331	-1.15	23.45	23.50	0.540
Back Side	20175/1732. 5	20M QPSK(1,49)	1.096	0.697	0.42	23.45	23.50	1.109
Back Side - Repeated	20175/1732. 5	20M QPSK(1,49)	1.054	0.684	1.53	23.45	23.50	1.066
Right Side	20175/1732. 5	20M QPSK(1,49)	0.331	0.158	0.25	23.45	23.50	0.335
Bottom Side	20175/1732. 5	20M QPSK(1,49)	0.689	0.402	-2.54	23.45	23.50	0.697
Back Side	20050/1720	20M QPSK(1,49)	1.068	0.686	-0.02	23.45	23.50	1.080
Back Side	20300/1745	20M QPSK(1,49)	1.059	0.614	-1.15	23.46	23.50	1.069
50%RB								
Front Side	20175/1732. 5	1.4M QPSK(3,0)	0.415	0.283	-2.21	23.47	23.50	0.418
Back Side	20175/1732. 5	1.4M QPSK(3,0)	0.951	0.466	-3.05	23.47	23.50	0.958
Back Side - Repeated	20175/1732. 5	1.4M QPSK(3,0)	0.894	0.467	0.54	23.47	23.50	0.900
Right Side	20175/1732. 5	1.4M QPSK(3,0)	0.315	0.146	0.52	23.47	23.50	0.317
Bottom Side	20175/1732. 5	1.4M QPSK(3,0)	0.511	0.264	1.53	23.47	23.50	0.515
Back Side	20050/1720	1.4M QPSK(3,0)	0.765	0.347	-2.13	23.37	23.50	0.788
Back Side	20300/1745	1.4M QPSK(3,0)	0.787	0.359	-1.15	23.45	23.50	0.796
100%RB								
Back Side	20175/1732. 5	20M QPSK(100,0)	0.795	0.432	-1.64	22.47	22.50	0.801

NOTE: Hotspot SAR test results of LTE Band IV

10.1.7. SAR measurement Result of LTE Band VII

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Left Cheek	21100/2535	20M QPSK(1,49)	0.063	0.038	2.30	22.92	23.00	0.064
Left Tilt 15 Degree	21100/2535	20M QPSK(1,49)	0.045	0.025	-0.18	22.92	23.00	0.046
Right Cheek	21100/2535	20M QPSK(1,49)	0.051	0.033	-2.15	22.92	23.00	0.052
Right Tilt 15 Degree	21100/2535	20M QPSK(1,49)	0.040	0.027	0.04	22.92	23.00	0.041
50%RB								
Left Cheek	21100/2535	20M QPSK(50,0)	0.048	0.029	-1.13	21.75	22.00	0.051
Left Tilt 15 Degree	21100/2535	20M QPSK(50,0)	0.032	0.022	0.05	21.75	22.00	0.034
Right Cheek	21100/2535	20M QPSK(50,0)	0.041	0.025	1.13	21.75	22.00	0.043
Right Tilt 15 Degree	21100/2535	20M QPSK(50,0)	0.025	0.017	0.87	21.75	22.00	0.026

NOTE: Head SAR test results of LTE Band VII

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	21100/2535	20M QPSK(1,49)	0.284	0.161	-2.13	22.92	23.00	0.289
Back Side	21100/2535	20M QPSK(1,49)	0.561	0.273	3.54	22.92	23.00	0.571
50%RB								
Front Side	21100/2535	20M QPSK(50,0)	0.243	0.135	-1.15	21.75	22.00	0.257
Back Side	21100/2535	20M QPSK(50,0)	0.416	0.251	0.31	21.75	22.00	0.441

NOTE: Body-Worn SAR test results of LTE Band VII

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conduc ted power (dBm)	Tune-u p power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	21100/2535	20M QPSK(1,49)	0.284	0.161	-2.13	22.92	23.00	0.289
Back Side	21100/2535	20M QPSK(1,49)	0.561	0.273	3.54	22.92	23.00	0.571
Right Side	21100/2535	20M QPSK(1,49)	0.156	0.089	1.47	22.92	23.00	0.159
Bottom Side	21100/2535	20M QPSK(1,49)	0.715	0.341	-0.25	22.92	23.00	0.728
50%RB								
Front Side	21100/2535	20M QPSK(50,0)	0.243	0.135	-1.15	21.75	22.00	0.257
Back Side	21100/2535	20M QPSK(50,0)	0.416	0.251	0.31	21.75	22.00	0.441
Right Side	21100/2535	20M QPSK(50,0)	0.114	0.076	0.84	21.75	22.00	0.121
Bottom Side	21100/2535	20M QPSK(50,0)	0.560	0.285	-1.10	21.75	22.00	0.593

NOTE: Hotspot SAR test results of LTE Band VII

10.1.8. SAR measurement Result of LTE Band XXXVIII

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Left Cheek	38000/2595	20M QPSK(1,49)	0.111	0.082	-2.05	23.38	23.50	0.114
Left Tilt 15 Degree	38000/2595	20M QPSK(1,49)	0.055	0.041	-2.50	23.38	23.50	0.057
Right Cheek	38000/2595	20M QPSK(1,49)	0.087	0.068	-1.26	23.38	23.50	0.089
Right Tilt 15	38000/2595	20M QPSK(1,49)	0.059	0.044	-4.01	23.38	23.50	0.061

Degree								
50%RB								
Left Cheek	38000/2595	20M QPSK(50,0)	0.075	0.055	-2.27	22.06	22.50	0.083
Left Tilt 15 Degree	38000/2595	20M QPSK(50,0)	0.042	0.029	-2.48	22.06	22.50	0.046
Right Cheek	38000/2595	20M QPSK(50,0)	0.064	0.048	-3.09	22.06	22.50	0.071
Right Tilt 15 Degree	38000/2595	20M QPSK(50,0)	0.033	0.024	-3.02	22.06	22.50	0.037

NOTE: Head SAR test results of LTE Band XXXVIII

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	38000/2595	20M QPSK(1,49)	0.102	0.076	-2.57	23.38	23.50	0.105
Back Side	38000/2595	20M QPSK(1,49)	0.372	0.206	2.17	23.38	23.50	0.382
50%RB								
Front Side	38000/2595	20M QPSK(50,0)	0.073	0.055	2.06	22.06	22.50	0.081
Back Side	38000/2595	20M QPSK(50,0)	0.111	0.082	1.48	22.06	22.50	0.123

NOTE: Body-Worn SAR test results of LTE Band XXXVIII

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conduc ted power (dBm)	Tune-u p power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	38000/2595	20M QPSK(1,49)	0.102	0.076	-2.57	23.38	23.50	0.105
Back Side	38000/2595	20M QPSK(1,49)	0.372	0.206	2.17	23.38	23.50	0.382
Right Side	38000/2595	20M QPSK(1,49)	0.077	0.054	0.43	23.38	23.50	0.079
Bottom Side	38000/2595	20M QPSK(1,49)	0.073	0.042	0.78	23.38	23.50	0.075
50%RB								
Front Side	38000/2595	20M	0.073	0.055	2.06	22.06	22.50	0.081

		QPSK(50,0)						
Back Side	38000/2595	20M QPSK(50,0)	0.111	0.082	1.48	22.06	22.50	0.123
Right Side	38000/2595	20M QPSK(50,0)	0.067	0.041	-0.86	22.06	22.50	0.074
Bottom Side	38000/2595	20M QPSK(50,0)	0.048	0.030	-0.42	22.06	22.50	0.053

NOTE: Hotspot SAR test results of LTE Band XXXVIII

10.1.9. SAR measurement Result of LTE Band XL A

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Left Cheek	38775/2312.5	15M QPSK(1,37)	0.078	0.062	3.09	23.21	23.50	0.083
Left Tilt 15 Degree	38775/2312.5	15M QPSK(1,37)	0.037	0.020	-1.16	23.21	23.50	0.040
Right Cheek	38775/2312.5	15M QPSK(1,37)	0.065	0.030	0.87	23.21	23.50	0.069
Right Tilt 15 Degree	38775/2312.5	15M QPSK(1,37)	0.028	0.016	2.31	23.21	23.50	0.030
50%RB								
Left Cheek	38775/2312.5	15M QPSK(36,0)	0.065	0.051	3.05	22.27	22.50	0.069
Left Tilt 15 Degree	38775/2312.5	15M QPSK(36,0)	0.031	0.018	-1.13	22.27	22.50	0.033
Right Cheek	38775/2312.5	15M QPSK(36,0)	0.049	0.025	3.25	22.27	22.50	0.052
Right Tilt 15 Degree	38775/2312.5	15M QPSK(36,0)	0.024	0.015	-2.21	22.27	22.50	0.025

NOTE: Head SAR test results of LTE Band XL A

Test Position of	Test channel /Freq.	Test Mode	SAR Value (W/kg)	Power Drift	Conducted	Tune-up	Scaled SAR 1g
------------------	---------------------	-----------	------------------	-------------	-----------	---------	---------------

Body - Worn with 10mm			1g	10g	(±5%)	power (dBm)	power (dBm)	(W/Kg)
1RB								
Front Side	38775/2312.5	15M QPSK(1,37)	0.165	0.103	3.45	23.21	23.50	0.176
Back Side	38775/2312.5	15M QPSK(1,37)	0.372	0.206	2.17	23.21	23.50	0.398
50%RB								
Front Side	38775/2312.5	15M QPSK(36,0)	0.050	0.031	-1.28	22.27	22.50	0.053
Back Side	38775/2312.5	15M QPSK(36,0)	0.131	0.061	-1.13	22.27	22.50	0.138

NOTE: Body-Worn SAR test results of LTE Band XL A

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conduc ted power (dBm)	Tune-u p power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	38775/2312.5	15M QPSK(1,37)	0.165	0.103	3.45	23.21	23.50	0.176
Back Side	38775/2312.5	15M QPSK(1,37)	0.372	0.206	2.17	23.21	23.50	0.398
Right Side	38775/2312.5	15M QPSK(1,37)	0.032	0.022	0.21	23.21	23.50	0.034
Bottom Side	38775/2312.5	15M QPSK(1,37)	0.059	0.031	-1.13	23.21	23.50	0.063
50%RB								
Front Side	38775/2312.5	15M QPSK(36,0)	0.050	0.031	-1.28	22.27	22.50	0.053
Back Side	38775/2312.5	15M QPSK(36,0)	0.131	0.061	-1.13	22.27	22.50	0.138
Right Side	38775/2312.5	15M QPSK(36,0)	0.028	0.018	-2.31	22.27	22.50	0.030
Bottom Side	38775/2312.5	15M QPSK(36,0)	0.030	0.018	2.24	22.27	22.50	0.032

NOTE: Hotspot SAR test results of LTE Band XL A

10.1.10. SAR measurement Result of LTE Band XL B

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Left Cheek	39175/2352.5	15M QPSK(1,37)	0.059	0.041	2.83	23.44	23.50	0.060
Left Tilt 15 Degree	39175/2352.5	15M QPSK(1,37)	0.028	0.020	-1.15	23.44	23.50	0.028
Right Cheek	39175/2352.5	15M QPSK(1,37)	0.040	0.027	0.59	23.44	23.50	0.041
Right Tilt 15 Degree	39175/2352.5	15M QPSK(1,37)	0.020	0.011	0.02	23.44	23.50	0.020
50%RB								
Left Cheek	39175/2352.5	15M QPSK(36,0)	0.053	0.036	4.52	22.46	22.50	0.053
Left Tilt 15 Degree	39175/2352.5	15M QPSK(36,0)	0.025	0.018	-1.64	22.46	22.50	0.025
Right Cheek	39175/2352.5	15M QPSK(36,0)	0.035	0.022	-2.21	22.46	22.50	0.035
Right Tilt 15 Degree	39175/2352.5	15M QPSK(36,0)	0.021	0.015	0.86	22.46	22.50	0.021

NOTE: Head SAR test results of LTE Band XL B

Test Position of Body - Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conduc ted power (dBm)	Tune-u p power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	39175/2352.5	15M QPSK(1,37)	0.104	0.059	-1.13	23.44	23.50	0.105
Back Side	39175/2352.5	15M QPSK(1,37)	0.241	0.145	-1.87	23.44	23.50	0.244
50%RB								
Front Side	39175/2352.5	15M QPSK(36,0)	0.089	0.055	-2.23	22.46	22.50	0.090

	5							
Back Side	39175/2352. 5	15M QPSK(36,0)	0.195	0.112	2.38	22.46	22.50	0.197

NOTE: Body-Worn SAR test results of LTE Band XL B

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conduc ted power (dBm)	Tune-u p power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	39175/2352.5	15M QPSK(1,37)	0.104	0.059	-1.13	23.44	23.50	0.105
Back Side	39175/2352.5	15M QPSK(1,37)	0.241	0.145	-1.87	23.44	23.50	0.244
Right Side	39175/2352.5	15M QPSK(1,37)	0.038	0.025	0.25	23.44	23.50	0.039
Bottom Side	39175/2352.5	15M QPSK(1,37)	0.049	0.029	2.21	23.44	23.50	0.050
50%RB								
Front Side	39175/2352.5	15M QPSK(36,0)	0.089	0.055	-2.23	22.46	22.50	0.090
Back Side	39175/2352.5	15M QPSK(36,0)	0.195	0.112	2.38	22.46	22.50	0.197
Right Side	39175/2352.5	15M QPSK(36,0)	0.030	0.021	0.65	22.46	22.50	0.030
Bottom Side	39175/2352.5	15M QPSK(36,0)	0.042	0.025	-2.06	22.46	22.50	0.042

NOTE: Hotspot SAR test results of LTE Band XL B

10.1.11. SAR measurement Result of LTE Band XLI

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Left Cheek	40620/2593	20M QPSK(1,0)	0.175	0.107	-1.88	21.68	22.50	0.211
Left Tilt 15 Degree	40620/2593	20M QPSK(1,0)	0.112	0.073	0.12	21.68	22.50	0.135

Right Cheek	40620/2593	20M QPSK(1,0)	0.124	0.081	-3.66	21.68	22.50	0.150
Right Tilt 15 Degree	40620/2593	20M QPSK(1,0)	0.087	0.053	0.31	21.68	22.50	0.105
50%RB								
Left Cheek	40620/2593	20M QPSK(50,0)	0.133	0.083	-3.76	21.68	22.50	0.161
Left Tilt 15 Degree	40620/2593	20M QPSK(50,0)	0.085	0.052	-0.17	21.68	22.50	0.103
Right Cheek	40620/2593	20M QPSK(50,0)	0.105	0.072	2.18	21.68	22.50	0.127
Right Tilt 15 Degree	40620/2593	20M QPSK(50,0)	0.065	0.041	3.04	21.68	22.50	0.079

NOTE: Head SAR test results of LTE Band XLI

Test Position of Body - Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	40620/2593	20M QPSK(1,0)	0.514	0.264	0.24	21.68	22.50	0.621
Back Side	40620/2593	20M QPSK(1,0)	0.573	0.328	-3.76	21.68	22.50	0.692
50%RB								
Front Side	40620/2593	20M QPSK(50,0)	0.402	0.189	0.17	21.68	22.50	0.486
Back Side	40620/2593	20M QPSK(50,0)	0.467	0.244	-1.50	21.68	22.50	0.564

NOTE: Body-Worn SAR test results of LTE Band XLI

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								
Front Side	40620/2593	20M QPSK(1,0)	0.514	0.264	0.24	21.68	22.50	0.621
Back Side	40620/2593	20M QPSK(1,0)	0.573	0.328	-3.76	21.68	22.50	0.692
Right Side	40620/2593	20M QPSK(1,0)	0.501	0.258	1.07	21.68	22.50	0.605
Bottom Side	40620/2593	20M QPSK(1,0)	0.492	0.240	-3.05	21.68	22.50	0.594
50%RB								

Front Side	40620/2593	20M QPSK(50,0)	0.402	0.189	0.17	21.68	22.50	0.486
Back Side	40620/2593	20M QPSK(50,0)	0.467	0.244	-1.50	21.68	22.50	0.564
Right Side	40620/2593	20M QPSK(50,0)	0.374	0.125	2.13	21.68	22.50	0.452
Bottom Side	40620/2593	20M QPSK(50,0)	0.351	0.103	0.27	21.68	22.50	0.424

NOTE: Hotspot SAR test results of LTE Band XLI

10.1.12. SAR measurement Result of WLAN 2.4G

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Left Cheek	6/2437	802.11 b	0.275	0.136	-0.19	15.30	16.00	0.323
Left Tilt 15 Degree	6/2437	802.11 b	0.224	0.115	-1.13	15.30	16.00	0.263
Right Cheek	6/2437	802.11 b	0.188	0.095	0.57	15.30	16.00	0.221
Right Tilt 15 Degree	6/2437	802.11 b	0.171	0.087	-1.21	15.30	16.00	0.201

NOTE: Head SAR test results of WLAN 2.4G

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	6/2437	802.11 b	0.211	0.131	-1.15	15.30	16.00	0.248
Back Side	6/2437	802.11 b	0.345	0.160	0.89	15.30	16.00	0.405

NOTE: Body-Worn SAR test results of WLAN 2.4G

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	6/2437	802.11 b	0.211	0.131	-1.15	15.30	16.00	0.248
Back Side	6/2437	802.11 b	0.345	0.160	0.89	15.30	16.00	0.405
Left Side	6/2437	802.11 b	0.084	0.041	-0.54	15.30	16.00	0.099
Top Side	6/2437	802.11 b	0.114	0.053	2.14	15.30	16.00	0.134

NOTE: Hotspot SAR test results of WLAN 2.4G

10.1.13. SAR measurement Result of WLAN 5.2G

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Left Cheek	40/5200	802.11 a	0.504	0.213	-1.57	15.00	16.00	0.634
Left Tilt 15 Degree	40/5200	802.11 a	0.226	0.165	-1.34	15.00	16.00	0.285
Right Cheek	40/5200	802.11 a	0.369	0.270	1.22	15.00	16.00	0.465
Right Tilt 15 Degree	40/5200	802.11 a	0.189	0.141	2.01	15.00	16.00	0.238

NOTE: Head SAR test results of WLAN 5.2G

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	40/5200	802.11 a	0.216	0.118	0.95	15.00	16.00	0.272
Back Side	40/5200	802.11 a	0.145	0.094	0.15	15.00	16.00	0.183

NOTE: Body-Worn SAR test results of WLAN 5.2G

10.1.14. SAR measurement Result of WLAN 5.3G

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Left Cheek	56/5280	802.11 a	0.506	0.206	-2.43	13.10	14.00	0.623
Left Tilt 15 Degree	56/5280	802.11 a	0.124	0.085	0.21	13.10	14.00	0.153
Right Cheek	56/5280	802.11 a	0.232	0.175	-1.19	13.10	14.00	0.285
Right Tilt 15 Degree	56/5280	802.11 a	0.112	0.074	1.54	13.10	14.00	0.138

NOTE: Head SAR test results of WLAN 5.3G

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	56/5280	802.11 a	0.225	0.171	0.21	13.10	14.00	0.277

Back Side	56/5280	802.11 a	0.214	0.153	-1.11	13.10	14.00	0.263
-----------	---------	----------	-------	-------	-------	-------	-------	-------

NOTE: Body-Worn SAR test results of WLAN 5.3G

10.1.15. SAR measurement Result of WLAN 5.6G

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Left Cheek	116/5580	802.11 a	0.394	0.175	-0.58	12.50	13.00	0.442
Left Tilt 15 Degree	116/5580	802.11 a	0.124	0.081	0.21	12.50	13.00	0.139
Right Cheek	116/5580	802.11 a	0.250	0.164	0.72	12.50	13.00	0.281
Right Tilt 15 Degree	116/5580	802.11 a	0.099	0.065	-2.81	12.50	13.00	0.111

NOTE: Head SAR test results of WLAN 5.6G

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	116/5580	802.11 a	0.124	0.074	1.04	12.50	13.00	0.139
Back Side	116/5580	802.11 a	0.171	0.101	-2.41	12.50	13.00	0.192

NOTE: Body-Worn SAR test results of WLAN 5.6G

10.1.16. SAR measurement Result of WLAN 5.8G

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Left Cheek	157/5785	802.11 a	0.468	0.192	0.47	13.10	14.00	0.576
Left Tilt 15 Degree	157/5785	802.11 a	0.308	0.172	-0.68	13.10	14.00	0.379
Right Cheek	157/5785	802.11 a	0.210	0.154	0.25	13.10	14.00	0.258
Right Tilt 15 Degree	157/5785	802.11 a	0.204	0.140	-3.10	13.10	14.00	0.251

NOTE: Head SAR test results of WLAN 5.8G

Test Position of	Test channel	Test Mode	SAR Value (W/kg)	Power Drift	Conducted power	Tune-up power	Scaled SAR 1g
------------------	--------------	-----------	------------------	-------------	-----------------	---------------	---------------

Body-Worn with 10mm	/Freq.		1g	10g	(±5%)	(dBm)	(dBm)	(W/Kg)
Front Side	157/5785	802.11 a	0.154	0.112	0.37	13.10	14.00	0.189
Back Side	157/5785	802.11 a	0.202	0.164	0.21	13.10	14.00	0.249

NOTE: Body-Worn SAR test results of WLAN 5.8G

10.1.17. SAR measurement Result of WCDMA Band II

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Left Cheek	9400/1880	RMC12.2K	0.264	0.167	0.44	23.21	24.00	0.317
Left Tilt 15 Degree	9400/1880	RMC12.2K	0.146	0.091	2.05	23.21	24.00	0.175
Right Cheek	9400/1880	RMC12.2K	0.245	0.152	-0.72	23.21	24.00	0.294
Right Tilt 15 Degree	9400/1880	RMC12.2K	0.116	0.077	-1.84	23.21	24.00	0.139

NOTE: Head SAR test results of WCDMA Band II

Test Position of Body-Worn with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	9400/1880	RMC12.2K	0.314	0.198	4.88	23.21	24.00	0.377
Back Side	9400/1880	RMC12.2K	0.412	0.254	-1.76	23.21	24.00	0.494

NOTE: Body-Worn SAR test results of WCDMA Band II

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
Front Side	9400/1880	RMC12.2K	0.314	0.198	4.88	23.21	24.00	0.377
Back Side	9400/1880	RMC12.2K	0.412	0.254	-1.76	23.21	24.00	0.494
Right Side	9400/1880	RMC12.2K	0.195	0.123	0.97	23.21	24.00	0.234
Bottom Side	9400/1880	RMC12.2K	0.155	0.097	-1.33	23.21	24.00	0.186

NOTE: Hotspot SAR test results of WCDMA Band II

10.1.18. SAR measurement Result of LTE Band II

Test Position of Head	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conducted power (dBm)	Tune-up power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				

NOTE: Head SAR test results of LTE Band II

NOTE: Body-Worn SAR test results of LTE Band II

Test Position of Hotspot with 10mm	Test channel /Freq.	Test Mode	SAR Value (W/kg)		Power Drift (±5%)	Conduc ted power (dBm)	Tune-u p power (dBm)	Scaled SAR 1g (W/Kg)
			1g	10g				
1RB								

Front Side	18900/1880	20M QPSK(1,49)	0.314	0.190	3.02	23.95	25.00	0.400
Back Side	18900/1880	20M QPSK(1,49)	0.409	0.253	0.59	23.95	25.00	0.521
Right Side	18900/1880	20M QPSK(1,49)	0.180	0.108	-2.15	23.95	25.00	0.229
Bottom Side	18900/1880	20M QPSK(1,49)	0.150	0.088	-4.49	23.95	25.00	0.191
50%RB								
Front Side	18900/1880	1.4M QPSK(3,1)	0.284	0.177	-1.90	23.86	24.00	0.293
Back Side	18900/1880	1.4M QPSK(3,1)	0.382	0.221	-3.36	23.86	24.00	0.395
Right Side	18900/1880	1.4M QPSK(3,1)	0.168	0.099	0.97	23.86	24.00	0.174
Bottom Side	18900/1880	1.4M QPSK(3,1)	0.129	0.079	-0.79	23.86	24.00	0.133

NOTE: Hotspot SAR test results of LTE Band II

10.2. SAR Summation Scenario

Per KDB 447498 D01, simultaneous transmission SAR is compliant if,

- 1) Scalar SAR summation $< 1.6\text{W/kg}$.
- 2) $\text{SPLSR} = (\text{SAR}_1 + \text{SAR}_2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the zoom scan. If $\text{SPLSR} \leq 0.04$, simultaneously transmission SAR measurement is not necessary.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		GSM 850	WLAN 2.4G			
Head	Left Cheek	0.420	0.323	0.743	N/A	N/A
	Left Tilt 15 Degree	0.121	0.263	0.384	N/A	N/A
	Right Cheek	0.311	0.221	0.532	N/A	N/A
	Right Tilt 15 Degree	0.126	0.201	0.327	N/A	N/A
Body-Worn	Front Side	0.344	0.248	0.592	N/A	N/A
	Back Side	0.435	0.405	0.840	N/A	N/A
Hotspot	Front Side	0.344	0.248	0.592	N/A	N/A
	Back Side	0.435	0.405	0.840	N/A	N/A
	Left Side	N/A	0.099	0.099	N/A	N/A
	Right Side	0.053	N/A	0.053	N/A	N/A
	Top Side	N/A	0.134	0.134	N/A	N/A
	Bottom Side	0.238	N/A	0.238	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of GSM850 and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		GSM 1900	WLAN 2.4G			
Head	Left Cheek	0.283	0.323	0.606	N/A	N/A
	Left Tilt 15 Degree	0.107	0.263	0.370	N/A	N/A
	Right Cheek	0.252	0.221	0.473	N/A	N/A
	Right Tilt 15 Degree	0.118	0.201	0.319	N/A	N/A
Body-Worn	Front Side	0.529	0.248	0.777	N/A	N/A
	Back Side	1.014	0.405	1.419	N/A	N/A
Hotspot	Front Side	0.529	0.248	0.777	N/A	N/A
	Back Side	1.014	0.405	1.419	N/A	N/A
	Left Side	N/A	0.099	0.099	N/A	N/A
	Right Side	0.214	N/A	0.214	N/A	N/A
	Top Side	N/A	0.134	0.134	N/A	N/A
	Bottom Side	0.325	N/A	0.325	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of GSM1900 and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band V	WLAN 2.4G			
Head	Left Cheek	0.237	0.323	0.560	N/A	N/A
	Left Tilt 15 Degree	0.100	0.263	0.363	N/A	N/A
	Right Cheek	0.207	0.221	0.428	N/A	N/A
	Right Tilt 15 Degree	0.073	0.201	0.274	N/A	N/A
Body-Worn	Front Side	0.204	0.248	0.452	N/A	N/A
	Back Side	0.262	0.405	0.667	N/A	N/A
Hotspot	Front Side	0.204	0.248	0.452	N/A	N/A
	Back Side	0.262	0.405	0.667	N/A	N/A
	Left Side	N/A	0.099	0.099	N/A	N/A
	Right Side	0.043	N/A	0.043	N/A	N/A
	Top Side	N/A	0.134	0.134	N/A	N/A
	Bottom Side	0.133	N/A	0.133	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band V and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band IV	WLAN 2.4G			
Head	Left Cheek	0.294	0.323	0.617	N/A	N/A
	Left Tilt 15 Degree	0.197	0.263	0.460	N/A	N/A
	Right Cheek	0.273	0.221	0.494	N/A	N/A

	Right Tilt 15 Degree	0.185	0.201	0.385	N/A	N/A
Body-Worn	Front Side	0.259	0.248	0.507	N/A	N/A
	Back Side	0.753	0.405	1.158	N/A	N/A
Hotspot	Front Side	0.259	0.248	0.507	N/A	N/A
	Back Side	0.753	0.405	1.158	N/A	N/A
	Left Side	N/A	0.099	0.099	N/A	N/A
	Right Side	0.318	N/A	0.318	N/A	N/A
	Top Side	N/A	0.134	0.134	N/A	N/A
	Bottom Side	0.231	N/A	0.231	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band IV and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band V	WLAN 2.4G			
Head	Left Cheek	0.301	0.323	0.624	N/A	N/A
	Left Tilt 15 Degree	0.137	0.263	0.400	N/A	N/A
	Right Cheek	0.260	0.221	0.481	N/A	N/A
	Right Tilt 15 Degree	0.115	0.201	0.316	N/A	N/A
Body-Worn	Front Side	0.161	0.248	0.409	N/A	N/A
	Back Side	0.322	0.405	0.727	N/A	N/A
Hotspot	Front Side	0.161	0.248	0.409	N/A	N/A
	Back Side	0.322	0.405	0.727	N/A	N/A
	Left Side	N/A	0.099	0.099	N/A	N/A
	Right Side	0.061	N/A	0.061	N/A	N/A
	Top Side	N/A	0.134	0.134	N/A	N/A
	Bottom Side	0.127	N/A	0.127	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band V and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band IV	WLAN 2.4G			
Head	Left Cheek	0.427	0.323	0.750	N/A	N/A
	Left Tilt 15 Degree	0.137	0.263	0.400	N/A	N/A
	Right Cheek	0.287	0.221	0.508	N/A	N/A
	Right Tilt 15 Degree	0.087	0.201	0.288	N/A	N/A
Body-Worn	Front Side	0.540	0.248	0.788	N/A	N/A
	Back Side	1.109	0.405	1.514	N/A	N/A
Hotspot	Front Side	0.540	0.248	0.788	N/A	N/A
	Back Side	1.109	0.405	1.514	N/A	N/A
	Left Side	N/A	0.099	0.099	N/A	N/A

	Right Side	0.335	N/A	0.335	N/A	N/A
	Top Side	N/A	0.134	0.134	N/A	N/A
	Bottom Side	0.697	N/A	0.697	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band IV and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band VII	WLAN 2.4G			
Head	Left Cheek	0.064	0.323	0.387	N/A	N/A
	Left Tilt 15 Degree	0.046	0.263	0.309	N/A	N/A
	Right Cheek	0.052	0.221	0.273	N/A	N/A
	Right Tilt 15 Degree	0.041	0.201	0.242	N/A	N/A
Body-Worn	Front Side	0.289	0.248	0.537	N/A	N/A
	Back Side	0.571	0.405	0.976	N/A	N/A
Hotspot	Front Side	0.289	0.248	0.537	N/A	N/A
	Back Side	0.571	0.405	0.976	N/A	N/A
	Left Side	N/A	0.099	0.099	N/A	N/A
	Right Side	0.159	N/A	0.159	N/A	N/A
	Top Side	N/A	0.134	0.134	N/A	N/A
	Bottom Side	0.728	N/A	0.728	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band VII and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band XXXVIII	WLAN 2.4G			
Head	Left Cheek	0.114	0.323	0.437	N/A	N/A
	Left Tilt 15 Degree	0.057	0.263	0.320	N/A	N/A
	Right Cheek	0.089	0.221	0.310	N/A	N/A
	Right Tilt 15 Degree	0.061	0.201	0.262	N/A	N/A
Body-Worn	Front Side	0.105	0.248	0.353	N/A	N/A
	Back Side	0.382	0.405	0.788	N/A	N/A
Hotspot	Front Side	0.105	0.248	0.353	N/A	N/A
	Back Side	0.382	0.405	0.788	N/A	N/A
	Left Side	N/A	0.099	0.099	N/A	N/A
	Right Side	0.079	N/A	0.079	N/A	N/A
	Top Side	N/A	0.134	0.134	N/A	N/A
	Bottom Side	0.075	N/A	0.075	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band XXXVIII and WLAN 2.4G.

Test Position	Scaled SAR _{MAX}		Σ 1-g SAR	SPLSR	Remark
---------------	---------------------------	--	------------------	-------	--------

		LTE Band XL A	WLAN 2.4G	(W/Kg)		
Head	Left Cheek	0.083	0.323	0.406	N/A	N/A
	Left Tilt 15 Degree	0.040	0.263	0.303	N/A	N/A
	Right Cheek	0.069	0.221	0.290	N/A	N/A
	Right Tilt 15 Degree	0.030	0.201	0.231	N/A	N/A
Body-Worn	Front Side	0.176	0.248	0.424	N/A	N/A
	Back Side	0.398	0.405	0.803	N/A	N/A
Hotspot	Front Side	0.176	0.248	0.424	N/A	N/A
	Back Side	0.398	0.405	0.803	N/A	N/A
	Left Side	N/A	0.099	0.099	N/A	N/A
	Right Side	0.034	N/A	0.034	N/A	N/A
	Top Side	N/A	0.134	0.134	N/A	N/A
	Bottom Side	0.063	N/A	0.063	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band XL A and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band XL B	WLAN 2.4G			
Head	Left Cheek	0.060	0.323	0.383	N/A	N/A
	Left Tilt 15 Degree	0.028	0.263	0.292	N/A	N/A
	Right Cheek	0.041	0.221	0.261	N/A	N/A
	Right Tilt 15 Degree	0.021	0.201	0.222	N/A	N/A
Body-Worn	Front Side	0.105	0.248	0.353	N/A	N/A
	Back Side	0.244	0.405	0.650	N/A	N/A
Hotspot	Front Side	0.105	0.248	0.353	N/A	N/A
	Back Side	0.244	0.405	0.650	N/A	N/A
	Left Side	N/A	0.099	0.099	N/A	N/A
	Right Side	0.039	N/A	0.039	N/A	N/A
	Top Side	N/A	0.134	0.134	N/A	N/A
	Bottom Side	0.050	N/A	0.050	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band XL B and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band XLI	WLAN 2.4G			
Head	Left Cheek	0.211	0.323	0.534	N/A	N/A
	Left Tilt 15 Degree	0.135	0.263	0.398	N/A	N/A
	Right Cheek	0.150	0.221	0.371	N/A	N/A

	Right Tilt 15 Degree	0.105	0.201	0.306	N/A	N/A
Body-Worn	Front Side	0.621	0.248	0.869	N/A	N/A
	Back Side	0.692	0.405	1.097	N/A	N/A
Hotspot	Front Side	0.621	0.248	0.869	N/A	N/A
	Back Side	0.692	0.405	1.097	N/A	N/A
	Left Side	N/A	0.099	0.099	N/A	N/A
	Right Side	0.605	N/A	0.605	N/A	N/A
	Top Side	N/A	0.134	0.134	N/A	N/A
	Bottom Side	0.594	N/A	0.594	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band XLI and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band II	WLAN 2.4G			
Head	Left Cheek	0.317	0.323	0.640	N/A	N/A
	Left Tilt 15 Degree	0.175	0.263	0.438	N/A	N/A
	Right Cheek	0.294	0.221	0.515	N/A	N/A
	Right Tilt 15 Degree	0.139	0.201	0.340	N/A	N/A
Body-Worn	Front Side	0.377	0.248	0.625	N/A	N/A
	Back Side	0.494	0.405	0.899	N/A	N/A
Hotspot	Front Side	0.377	0.248	0.625	N/A	N/A
	Back Side	0.494	0.405	0.899	N/A	N/A
	Left Side	N/A	0.099	0.099	N/A	N/A
	Right Side	0.234	N/A	0.234	N/A	N/A
	Top Side	N/A	0.134	0.134	N/A	N/A
	Bottom Side	0.186	N/A	0.186	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band II and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band II	WLAN 2.4G			
Head	Left Cheek	0.372	0.323	0.695	N/A	N/A
	Left Tilt 15 Degree	0.218	0.263	0.481	N/A	N/A
	Right Cheek	0.346	0.221	0.567	N/A	N/A
	Right Tilt 15 Degree	0.162	0.201	0.363	N/A	N/A
Body-Worn	Front Side	0.289	0.248	0.537	N/A	N/A
	Back Side	0.571	0.405	0.976	N/A	N/A
Hotspot	Front Side	0.400	0.248	0.648	N/A	N/A
	Back Side	0.521	0.405	0.926	N/A	N/A
	Left Side	N/A	0.099	0.099	N/A	N/A

	Right Side	0.229	N/A	0.229	N/A	N/A
	Top Side	N/A	0.134	0.134	N/A	N/A
	Bottom Side	0.191	N/A	0.191	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band II and WLAN 2.4G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		GSM 850	Bluetooth			
Head	Left Cheek	0.420	0.149	0.569	N/A	N/A
	Left Tilt 15 Degree	0.121	0.149	0.270	N/A	N/A
	Right Cheek	0.311	0.149	0.460	N/A	N/A
	Right Tilt 15 Degree	0.126	0.149	0.275	N/A	N/A
Body-Worn	Front Side	0.344	0.075	0.419	N/A	N/A
	Back Side	0.435	0.075	0.510	N/A	N/A
Hotspot	Front Side	0.344	0.075	0.419	N/A	N/A
	Back Side	0.435	0.075	0.510	N/A	N/A
	Left Side	N/A	0.075	0.075	N/A	N/A
	Right Side	0.053	N/A	0.053	N/A	N/A
	Top Side	N/A	0.075	0.075	N/A	N/A
	Bottom Side	0.238	N/A	0.238	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of GSM850 and Bluetooth

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		GSM 1900	Bluetooth			
Head	Left Cheek	0.283	0.149	0.432	N/A	N/A
	Left Tilt 15 Degree	0.107	0.149	0.256	N/A	N/A
	Right Cheek	0.252	0.149	0.401	N/A	N/A
	Right Tilt 15 Degree	0.118	0.149	0.267	N/A	N/A
Body-Worn	Front Side	0.529	0.075	0.604	N/A	N/A
	Back Side	1.014	0.075	1.089	N/A	N/A
Hotspot	Front Side	0.529	0.075	0.604	N/A	N/A
	Back Side	1.014	0.075	1.089	N/A	N/A
	Left Side	N/A	0.075	0.075	N/A	N/A
	Right Side	0.214	N/A	0.214	N/A	N/A
	Top Side	N/A	0.075	0.075	N/A	N/A
	Bottom Side	0.325	N/A	0.325	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of GSM1900 and Bluetooth

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band V	Bluetooth			

Head	Left Cheek	0.237	0.149	0.386	N/A	N/A
	Left Tilt 15 Degree	0.100	0.149	0.249	N/A	N/A
	Right Cheek	0.207	0.149	0.356	N/A	N/A
	Right Tilt 15 Degree	0.073	0.149	0.222	N/A	N/A
Body-Worn	Front Side	0.204	0.075	0.279	N/A	N/A
	Back Side	0.262	0.075	0.337	N/A	N/A
Hotspot	Front Side	0.204	0.075	0.279	N/A	N/A
	Back Side	0.262	0.075	0.337	N/A	N/A
	Left Side	N/A	0.075	0.075	N/A	N/A
	Right Side	0.043	N/A	0.043	N/A	N/A
	Top Side	N/A	0.075	0.075	N/A	N/A
	Bottom Side	0.133	N/A	0.133	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band V and Bluetooth

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band IV	Bluetooth			
Head	Left Cheek	0.294	0.149	0.443	N/A	N/A
	Left Tilt 15 Degree	0.197	0.149	0.346	N/A	N/A
	Right Cheek	0.273	0.149	0.422	N/A	N/A
	Right Tilt 15 Degree	0.185	0.149	0.334	N/A	N/A
Body-Worn	Front Side	0.259	0.075	0.334	N/A	N/A
	Back Side	0.753	0.075	0.828	N/A	N/A
Hotspot	Front Side	0.259	0.075	0.334	N/A	N/A
	Back Side	0.753	0.075	0.828	N/A	N/A
	Left Side	N/A	0.075	0.075	N/A	N/A
	Right Side	0.318	N/A	0.318	N/A	N/A
	Top Side	N/A	0.075	0.075	N/A	N/A
	Bottom Side	0.231	N/A	0.231	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band IV and Bluetooth

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band V	Bluetooth			
Head	Left Cheek	0.301	0.149	0.450	N/A	N/A
	Left Tilt 15 Degree	0.137	0.149	0.286	N/A	N/A
	Right Cheek	0.260	0.149	0.409	N/A	N/A
	Right Tilt 15 Degree	0.115	0.149	0.264	N/A	N/A
Body-Worn	Front Side	0.161	0.075	0.236	N/A	N/A
	Back Side	0.322	0.075	0.397	N/A	N/A

Hotspot	Front Side	0.161	0.075	0.236	N/A	N/A
	Back Side	0.322	0.075	0.397	N/A	N/A
	Left Side	N/A	0.075	0.075	N/A	N/A
	Right Side	0.061	N/A	0.061	N/A	N/A
	Top Side	N/A	0.075	0.075	N/A	N/A
	Bottom Side	0.127	N/A	0.127	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band V and Bluetooth

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band IV	Bluetooth			
Head	Left Cheek	0.427	0.149	0.576	N/A	N/A
	Left Tilt 15 Degree	0.137	0.149	0.286	N/A	N/A
	Right Cheek	0.287	0.149	0.436	N/A	N/A
	Right Tilt 15 Degree	0.087	0.149	0.236	N/A	N/A
Body-Worn	Front Side	0.540	0.075	0.615	N/A	N/A
	Back Side	1.109	0.075	1.184	N/A	N/A
Hotspot	Front Side	0.540	0.075	0.615	N/A	N/A
	Back Side	1.109	0.075	1.184	N/A	N/A
	Left Side	N/A	0.075	0.075	N/A	N/A
	Right Side	0.335	N/A	0.335	N/A	N/A
	Top Side	N/A	0.075	0.075	N/A	N/A
	Bottom Side	0.697	N/A	0.697	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band IV and Bluetooth

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band VII	Bluetooth			
Head	Left Cheek	0.064	0.149	0.213	N/A	N/A
	Left Tilt 15 Degree	0.046	0.149	0.195	N/A	N/A
	Right Cheek	0.052	0.149	0.201	N/A	N/A
	Right Tilt 15 Degree	0.041	0.149	0.190	N/A	N/A
Body-Worn	Front Side	0.289	0.075	0.364	N/A	N/A
	Back Side	0.571	0.075	0.646	N/A	N/A
Hotspot	Front Side	0.289	0.075	0.364	N/A	N/A
	Back Side	0.571	0.075	0.646	N/A	N/A
	Left Side	N/A	0.075	0.075	N/A	N/A
	Right Side	0.159	N/A	0.159	N/A	N/A
	Top Side	N/A	0.075	0.075	N/A	N/A
	Bottom Side	0.728	N/A	0.728	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band VII and Bluetooth

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band XXXVIII	Bluetooth			
Head	Left Cheek	0.114	0.149	0.263	N/A	N/A
	Left Tilt 15 Degree	0.057	0.149	0.206	N/A	N/A
	Right Cheek	0.089	0.149	0.238	N/A	N/A
	Right Tilt 15 Degree	0.061	0.149	0.210	N/A	N/A
Body-Worn	Front Side	0.105	0.075	0.180	N/A	N/A
	Back Side	0.382	0.075	0.457	N/A	N/A
Hotspot	Front Side	0.105	0.075	0.180	N/A	N/A
	Back Side	0.382	0.075	0.457	N/A	N/A
	Left Side	N/A	0.075	0.075	N/A	N/A
	Right Side	0.079	N/A	0.079	N/A	N/A
	Top Side	N/A	0.075	0.075	N/A	N/A
	Bottom Side	0.075	N/A	0.075	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band XXXVIII and Bluetooth

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band XL A	Bluetooth			
Head	Left Cheek	0.083	0.149	0.232	N/A	N/A
	Left Tilt 15 Degree	0.040	0.149	0.189	N/A	N/A
	Right Cheek	0.069	0.149	0.218	N/A	N/A
	Right Tilt 15 Degree	0.030	0.149	0.179	N/A	N/A
Body-Worn	Front Side	0.176	0.075	0.251	N/A	N/A
	Back Side	0.398	0.075	0.473	N/A	N/A
Hotspot	Front Side	0.176	0.075	0.251	N/A	N/A
	Back Side	0.398	0.075	0.473	N/A	N/A
	Left Side	N/A	0.075	0.075	N/A	N/A
	Right Side	0.034	N/A	0.034	N/A	N/A
	Top Side	N/A	0.075	0.075	N/A	N/A
	Bottom Side	0.063	N/A	0.063	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band XL A and Bluetooth

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band XL B	Bluetooth			
Head	Left Cheek	0.060	0.149	0.209	N/A	N/A
	Left Tilt 15	0.028	0.149	0.177	N/A	N/A

	Degree					
	Right Cheek	0.041	0.149	0.190	N/A	N/A
	Right Tilt 15 Degree	0.021	0.149	0.170	N/A	N/A
Body-Worn	Front Side	0.105	0.075	0.180	N/A	N/A
	Back Side	0.244	0.075	0.319	N/A	N/A
Hotspot	Front Side	0.105	0.075	0.180	N/A	N/A
	Back Side	0.244	0.075	0.319	N/A	N/A
	Left Side	N/A	0.075	0.075	N/A	N/A
	Right Side	0.039	N/A	0.039	N/A	N/A
	Top Side	N/A	0.075	0.075	N/A	N/A
	Bottom Side	0.050	N/A	0.050	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band XL B and Bluetooth

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band XLI	Bluetooth			
Head	Left Cheek	0.211	0.149	0.360	N/A	N/A
	Left Tilt 15 Degree	0.135	0.149	0.284	N/A	N/A
	Right Cheek	0.150	0.149	0.299	N/A	N/A
	Right Tilt 15 Degree	0.105	0.149	0.254	N/A	N/A
Body-Worn	Front Side	0.621	0.075	0.696	N/A	N/A
	Back Side	0.692	0.075	0.767	N/A	N/A
Hotspot	Front Side	0.621	0.075	0.696	N/A	N/A
	Back Side	0.692	0.075	0.767	N/A	N/A
	Left Side	N/A	0.075	0.075	N/A	N/A
	Right Side	0.605	N/A	0.605	N/A	N/A
	Top Side	N/A	0.075	0.075	N/A	N/A
	Bottom Side	0.594	N/A	0.594	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band XLI and Bluetooth

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band II	Bluetooth			
Head	Left Cheek	0.317	0.149	0.466	N/A	N/A
	Left Tilt 15 Degree	0.175	0.149	0.324	N/A	N/A
	Right Cheek	0.294	0.149	0.443	N/A	N/A
	Right Tilt 15 Degree	0.139	0.149	0.288	N/A	N/A
Body-Worn	Front Side	0.377	0.075	0.452	N/A	N/A
	Back Side	0.494	0.075	0.569	N/A	N/A

Hotspot	Front Side	0.377	0.075	0.452	N/A	N/A
	Back Side	0.494	0.075	0.569	N/A	N/A
	Left Side	N/A	0.075	0.075	N/A	N/A
	Right Side	0.234	N/A	0.234	N/A	N/A
	Top Side	N/A	0.075	0.075	N/A	N/A
	Bottom Side	0.186	N/A	0.186	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band II and Bluetooth

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band II	Bluetooth			
Head	Left Cheek	0.372	0.149	0.521	N/A	N/A
	Left Tilt 15 Degree	0.218	0.149	0.367	N/A	N/A
	Right Cheek	0.346	0.149	0.495	N/A	N/A
	Right Tilt 15 Degree	0.162	0.149	0.311	N/A	N/A
Body-Worn	Front Side	0.289	0.075	0.364	N/A	N/A
	Back Side	0.571	0.075	0.646	N/A	N/A
Hotspot	Front Side	0.400	0.075	0.475	N/A	N/A
	Back Side	0.521	0.075	0.596	N/A	N/A
	Left Side	N/A	0.075	0.075	N/A	N/A
	Right Side	0.229	N/A	0.229	N/A	N/A
	Top Side	N/A	0.075	0.075	N/A	N/A
	Bottom Side	0.191	N/A	0.191	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band II and Bluetooth

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		GSM 850	WLAN 5.2G			
Head	Left Cheek	0.420	0.634	1.054	N/A	N/A
	Left Tilt 15 Degree	0.121	0.285	0.406	N/A	N/A
	Right Cheek	0.311	0.465	0.776	N/A	N/A
	Right Tilt 15 Degree	0.126	0.238	0.364	N/A	N/A
Body-Worn	Front Side	0.344	0.248	0.592	N/A	N/A
	Back Side	0.435	0.405	0.840	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of GSM850 and WLAN 5.2G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		GSM 1900	WLAN 5.2G			
Head	Left Cheek	0.283	0.634	0.917	N/A	N/A
	Left Tilt 15 Degree	0.107	0.285	0.392	N/A	N/A
	Right Cheek	0.252	0.465	0.717	N/A	N/A
	Right Tilt 15	0.118	0.238	0.356	N/A	N/A

	Degree					
Body-Worn	Front Side	0.529	0.248	0.777	N/A	N/A
	Back Side	1.014	0.405	1.419	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of GSM1900 and WLAN 5.2G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band V	WLAN 5.2G			
Head	Left Cheek	0.237	0.634	0.871	N/A	N/A
	Left Tilt 15 Degree	0.100	0.285	0.385	N/A	N/A
	Right Cheek	0.207	0.465	0.672	N/A	N/A
	Right Tilt 15 Degree	0.073	0.238	0.311	N/A	N/A
Body-Worn	Front Side	0.204	0.248	0.452	N/A	N/A
	Back Side	0.262	0.405	0.667	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band V and WLAN 5.2G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band IV	WLAN 5.2G			
Head	Left Cheek	0.294	0.634	0.929	N/A	N/A
	Left Tilt 15 Degree	0.197	0.285	0.482	N/A	N/A
	Right Cheek	0.273	0.465	0.738	N/A	N/A
	Right Tilt 15 Degree	0.185	0.238	0.422	N/A	N/A
Body-Worn	Front Side	0.259	0.248	0.507	N/A	N/A
	Back Side	0.753	0.405	1.158	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band IV and WLAN 5.2G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band V	WLAN 5.2G			
Head	Left Cheek	0.301	0.634	0.935	N/A	N/A
	Left Tilt 15 Degree	0.137	0.285	0.422	N/A	N/A
	Right Cheek	0.260	0.465	0.725	N/A	N/A
	Right Tilt 15 Degree	0.115	0.238	0.353	N/A	N/A
Body-Worn	Front Side	0.161	0.248	0.409	N/A	N/A
	Back Side	0.322	0.405	0.727	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band V and WLAN 5.2G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band IV	WLAN 5.2G			
Head	Left Cheek	0.427	0.634	1.061	N/A	N/A

Body-Worn	Left Tilt 15 Degree	0.137	0.285	0.422	N/A	N/A
	Right Cheek	0.287	0.465	0.752	N/A	N/A
	Right Tilt 15 Degree	0.087	0.238	0.325	N/A	N/A
	Front Side	0.540	0.248	0.788	N/A	N/A
	Back Side	1.109	0.405	1.514	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band IV and WLAN 5.2G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band VII	WLAN 5.2G			
Head	Left Cheek	0.064	0.634	0.698	N/A	N/A
	Left Tilt 15 Degree	0.046	0.285	0.331	N/A	N/A
	Right Cheek	0.052	0.465	0.517	N/A	N/A
	Right Tilt 15 Degree	0.041	0.238	0.279	N/A	N/A
Body-Worn	Front Side	0.289	0.248	0.537	N/A	N/A
	Back Side	0.571	0.405	0.976	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band VII and WLAN 5.2G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band XXXVIII	WLAN 5.2G			
Head	Left Cheek	0.114	0.634	0.749	N/A	N/A
	Left Tilt 15 Degree	0.057	0.285	0.341	N/A	N/A
	Right Cheek	0.089	0.465	0.554	N/A	N/A
	Right Tilt 15 Degree	0.061	0.238	0.299	N/A	N/A
Body-Worn	Front Side	0.105	0.248	0.353	N/A	N/A
	Back Side	0.382	0.405	0.788	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band XXXVIII and WLAN 5.2G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band XL A	WLAN 5.2G			
Head	Left Cheek	0.083	0.634	0.718	N/A	N/A
	Left Tilt 15 Degree	0.040	0.285	0.324	N/A	N/A
	Right Cheek	0.069	0.465	0.534	N/A	N/A
	Right Tilt 15 Degree	0.030	0.238	0.268	N/A	N/A
Body-Worn	Front Side	0.176	0.248	0.424	N/A	N/A
	Back Side	0.398	0.405	0.803	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band XL A and WLAN 5.2G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band XL B	WLAN 5.2G			
Head	Left Cheek	0.060	0.634	0.694	N/A	N/A
	Left Tilt 15 Degree	0.028	0.285	0.313	N/A	N/A
	Right Cheek	0.041	0.465	0.505	N/A	N/A
	Right Tilt 15 Degree	0.021	0.238	0.259	N/A	N/A
Body-Worn	Front Side	0.105	0.248	0.353	N/A	N/A
	Back Side	0.244	0.405	0.650	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band XL B and WLAN 5.2G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band XLI	WLAN 5.2G			
Head	Left Cheek	0.211	0.634	0.846	N/A	N/A
	Left Tilt 15 Degree	0.135	0.285	0.420	N/A	N/A
	Right Cheek	0.150	0.465	0.614	N/A	N/A
	Right Tilt 15 Degree	0.105	0.238	0.343	N/A	N/A
Body-Worn	Front Side	0.621	0.248	0.869	N/A	N/A
	Back Side	0.692	0.405	1.097	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band XLI and WLAN 5.2G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band II	WLAN 5.2G			
Head	Left Cheek	0.317	0.634	0.951	N/A	N/A
	Left Tilt 15 Degree	0.175	0.285	0.460	N/A	N/A
	Right Cheek	0.294	0.465	0.759	N/A	N/A
	Right Tilt 15 Degree	0.139	0.238	0.377	N/A	N/A
Body-Worn	Front Side	0.377	0.248	0.625	N/A	N/A
	Back Side	0.494	0.405	0.899	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band II and WLAN 5.2G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band II	WLAN 5.2G			
Head	Left Cheek	0.372	0.634	1.006	N/A	N/A
	Left Tilt 15 Degree	0.218	0.285	0.503	N/A	N/A
	Right Cheek	0.346	0.465	0.811	N/A	N/A

	Right Tilt 15 Degree	0.162	0.238	0.400	N/A	N/A
Body-Worn	Front Side	0.289	0.248	0.537	N/A	N/A
	Back Side	0.571	0.405	0.976	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band II and WLAN 5.2G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		GSM 850	WLAN 5.3G			
Head	Left Cheek	0.420	0.623	1.043	N/A	N/A
	Left Tilt 15 Degree	0.121	0.153	0.274	N/A	N/A
	Right Cheek	0.311	0.285	0.596	N/A	N/A
	Right Tilt 15 Degree	0.126	0.138	0.264	N/A	N/A
Body-Worn	Front Side	0.344	0.277	0.621	N/A	N/A
	Back Side	0.435	0.263	0.698	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of GSM850 and WLAN 5.3G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		GSM 1900	WLAN 5.3G			
Head	Left Cheek	0.283	0.623	0.906	N/A	N/A
	Left Tilt 15 Degree	0.107	0.153	0.260	N/A	N/A
	Right Cheek	0.252	0.285	0.537	N/A	N/A
	Right Tilt 15 Degree	0.118	0.138	0.256	N/A	N/A
Body-Worn	Front Side	0.529	0.277	0.806	N/A	N/A
	Back Side	1.014	0.263	1.277	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of GSM1900 and WLAN 5.3G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band V	WLAN 5.3G			
Head	Left Cheek	0.237	0.623	0.860	N/A	N/A
	Left Tilt 15 Degree	0.100	0.153	0.253	N/A	N/A
	Right Cheek	0.207	0.285	0.492	N/A	N/A
	Right Tilt 15 Degree	0.073	0.138	0.211	N/A	N/A
Body-Worn	Front Side	0.204	0.277	0.481	N/A	N/A
	Back Side	0.262	0.263	0.525	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band V and WLAN 5.3G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band IV	WLAN 5.3G			
Head	Left Cheek	0.294	0.623	0.917	N/A	N/A

Body-Worn	Left Tilt 15 Degree	0.197	0.153	0.350	N/A	N/A
	Right Cheek	0.273	0.285	0.559	N/A	N/A
	Right Tilt 15 Degree	0.185	0.138	0.322	N/A	N/A
	Front Side	0.259	0.277	0.536	N/A	N/A
	Back Side	0.753	0.263	1.016	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band IV and WLAN 5.3G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band V	WLAN 5.3G			
Head	Left Cheek	0.301	0.623	0.924	N/A	N/A
	Left Tilt 15 Degree	0.137	0.153	0.290	N/A	N/A
	Right Cheek	0.260	0.285	0.545	N/A	N/A
	Right Tilt 15 Degree	0.115	0.138	0.253	N/A	N/A
Body-Worn	Front Side	0.161	0.277	0.438	N/A	N/A
	Back Side	0.322	0.263	0.585	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band V and WLAN 5.3G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band IV	WLAN 5.3G			
Head	Left Cheek	0.427	0.623	1.050	N/A	N/A
	Left Tilt 15 Degree	0.137	0.153	0.290	N/A	N/A
	Right Cheek	0.287	0.285	0.572	N/A	N/A
	Right Tilt 15 Degree	0.087	0.138	0.225	N/A	N/A
Body-Worn	Front Side	0.540	0.277	0.817	N/A	N/A
	Back Side	1.109	0.263	1.372	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band IV and WLAN 5.3G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band VII	WLAN 5.3G			
Head	Left Cheek	0.064	0.623	0.687	N/A	N/A
	Left Tilt 15 Degree	0.046	0.153	0.199	N/A	N/A
	Right Cheek	0.052	0.285	0.337	N/A	N/A
	Right Tilt 15 Degree	0.041	0.138	0.179	N/A	N/A
Body-Worn	Front Side	0.289	0.277	0.566	N/A	N/A
	Back Side	0.571	0.263	0.834	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band VII and WLAN 5.3G.

Test Position	Scaled SAR _{MAX}		Σ 1-g SAR	SPLSR	Remark
---------------	---------------------------	--	------------------	-------	--------

		LTE Band XXXVIII	WLAN 5.3G	(W/Kg)		
Head	Left Cheek	0.114	0.623	0.737	N/A	N/A
	Left Tilt 15 Degree	0.057	0.153	0.209	N/A	N/A
	Right Cheek	0.089	0.285	0.375	N/A	N/A
	Right Tilt 15 Degree	0.061	0.138	0.198	N/A	N/A
Body-Worn	Front Side	0.105	0.277	0.382	N/A	N/A
	Back Side	0.382	0.263	0.646	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band XXXVIII and WLAN 5.3G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band XL A	WLAN 5.3G			
Head	Left Cheek	0.083	0.623	0.706	N/A	N/A
	Left Tilt 15 Degree	0.040	0.153	0.192	N/A	N/A
	Right Cheek	0.069	0.285	0.355	N/A	N/A
	Right Tilt 15 Degree	0.030	0.138	0.168	N/A	N/A
Body-Worn	Front Side	0.176	0.277	0.453	N/A	N/A
	Back Side	0.398	0.263	0.661	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band XL A and WLAN 5.3G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band XL B	WLAN 5.3G			
Head	Left Cheek	0.060	0.623	0.682	N/A	N/A
	Left Tilt 15 Degree	0.028	0.153	0.181	N/A	N/A
	Right Cheek	0.041	0.285	0.326	N/A	N/A
	Right Tilt 15 Degree	0.021	0.138	0.159	N/A	N/A
Body-Worn	Front Side	0.105	0.277	0.382	N/A	N/A
	Back Side	0.244	0.263	0.508	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band XL B and WLAN 5.3G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band XLI	WLAN 5.3G			
Head	Left Cheek	0.211	0.623	0.834	N/A	N/A
	Left Tilt 15 Degree	0.135	0.153	0.288	N/A	N/A
	Right Cheek	0.150	0.285	0.435	N/A	N/A
	Right Tilt 15 Degree	0.105	0.138	0.243	N/A	N/A

Body-Worn	Front Side	0.621	0.277	0.898	N/A	N/A
	Back Side	0.692	0.263	0.955	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band XLI and WLAN 5.3G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band II	WLAN 5.3G			
Head	Left Cheek	0.317	0.623	0.940	N/A	N/A
	Left Tilt 15 Degree	0.175	0.153	0.328	N/A	N/A
	Right Cheek	0.294	0.285	0.579	N/A	N/A
	Right Tilt 15 Degree	0.139	0.138	0.277	N/A	N/A
Body-Worn	Front Side	0.377	0.277	0.654	N/A	N/A
	Back Side	0.494	0.263	0.757	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band II and WLAN 5.3G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band II	WLAN 5.3G			
Head	Left Cheek	0.372	0.623	0.995	N/A	N/A
	Left Tilt 15 Degree	0.218	0.153	0.371	N/A	N/A
	Right Cheek	0.346	0.285	0.631	N/A	N/A
	Right Tilt 15 Degree	0.162	0.138	0.300	N/A	N/A
Body-Worn	Front Side	0.289	0.277	0.566	N/A	N/A
	Back Side	0.571	0.263	0.834	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band II and WLAN 5.3G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		GSM 850	WLAN 5.6G			
Head	Left Cheek	0.420	0.442	0.862	N/A	N/A
	Left Tilt 15 Degree	0.121	0.139	0.260	N/A	N/A
	Right Cheek	0.311	0.281	0.592	N/A	N/A
	Right Tilt 15 Degree	0.126	0.111	0.237	N/A	N/A
Body-Worn	Front Side	0.344	0.139	0.483	N/A	N/A
	Back Side	0.435	0.192	0.627	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of GSM850 and WLAN 5.6G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		GSM 1900	WLAN 5.6G			
Head	Left Cheek	0.283	0.442	0.725	N/A	N/A
	Left Tilt 15 Degree	0.107	0.139	0.246	N/A	N/A
	Right Cheek	0.252	0.281	0.533	N/A	N/A

	Right Tilt 15 Degree	0.118	0.111	0.229	N/A	N/A
Body-Worn	Front Side	0.529	0.139	0.668	N/A	N/A
	Back Side	1.014	0.192	1.206	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of GSM1900 and WLAN 5.6G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band V	WLAN 5.6G			
Head	Left Cheek	0.237	0.442	0.679	N/A	N/A
	Left Tilt 15 Degree	0.100	0.139	0.239	N/A	N/A
	Right Cheek	0.207	0.281	0.488	N/A	N/A
	Right Tilt 15 Degree	0.073	0.111	0.184	N/A	N/A
Body-Worn	Front Side	0.204	0.139	0.343	N/A	N/A
	Back Side	0.262	0.192	0.454	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band V and WLAN 5.6G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band IV	WLAN 5.6G			
Head	Left Cheek	0.294	0.442	0.736	N/A	N/A
	Left Tilt 15 Degree	0.197	0.139	0.336	N/A	N/A
	Right Cheek	0.273	0.281	0.554	N/A	N/A
	Right Tilt 15 Degree	0.185	0.111	0.296	N/A	N/A
Body-Worn	Front Side	0.259	0.139	0.399	N/A	N/A
	Back Side	0.753	0.192	0.945	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band IV and WLAN 5.6G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band V	WLAN 5.6G			
Head	Left Cheek	0.301	0.442	0.743	N/A	N/A
	Left Tilt 15 Degree	0.137	0.139	0.276	N/A	N/A
	Right Cheek	0.260	0.281	0.541	N/A	N/A
	Right Tilt 15 Degree	0.115	0.111	0.226	N/A	N/A
Body-Worn	Front Side	0.161	0.139	0.300	N/A	N/A
	Back Side	0.322	0.192	0.514	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band V and WLAN 5.6G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band IV	WLAN 5.6G			

Head	Left Cheek	0.427	0.442	0.869	N/A	N/A
	Left Tilt 15 Degree	0.137	0.139	0.276	N/A	N/A
	Right Cheek	0.287	0.281	0.568	N/A	N/A
	Right Tilt 15 Degree	0.087	0.111	0.198	N/A	N/A
Body-Worn	Front Side	0.540	0.139	0.679	N/A	N/A
	Back Side	1.109	0.192	1.301	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band IV and WLAN 5.6G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band VII	WLAN 5.6G			
Head	Left Cheek	0.064	0.442	0.506	N/A	N/A
	Left Tilt 15 Degree	0.046	0.139	0.185	N/A	N/A
	Right Cheek	0.052	0.281	0.333	N/A	N/A
	Right Tilt 15 Degree	0.041	0.111	0.152	N/A	N/A
Body-Worn	Front Side	0.289	0.139	0.428	N/A	N/A
	Back Side	0.571	0.192	0.763	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band VII and WLAN 5.6G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band XXXVIII	WLAN 5.6G			
Head	Left Cheek	0.114	0.442	0.556	N/A	N/A
	Left Tilt 15 Degree	0.057	0.139	0.196	N/A	N/A
	Right Cheek	0.089	0.281	0.370	N/A	N/A
	Right Tilt 15 Degree	0.061	0.111	0.172	N/A	N/A
Body-Worn	Front Side	0.105	0.139	0.244	N/A	N/A
	Back Side	0.382	0.192	0.574	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band XXXVIII and WLAN 5.6G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band XL A	WLAN 5.6G			
Head	Left Cheek	0.083	0.442	0.525	N/A	N/A
	Left Tilt 15 Degree	0.040	0.139	0.179	N/A	N/A
	Right Cheek	0.069	0.281	0.350	N/A	N/A
	Right Tilt 15 Degree	0.030	0.111	0.141	N/A	N/A
Body-Worn	Front Side	0.176	0.139	0.316	N/A	N/A
	Back Side	0.398	0.192	0.590	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band XL A and WLAN 5.6G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band XL B	WLAN 5.6G			
Head	Left Cheek	0.060	0.442	0.502	N/A	N/A
	Left Tilt 15 Degree	0.028	0.139	0.168	N/A	N/A
	Right Cheek	0.041	0.281	0.321	N/A	N/A
	Right Tilt 15 Degree	0.021	0.111	0.132	N/A	N/A
Body-Worn	Front Side	0.105	0.139	0.245	N/A	N/A
	Back Side	0.244	0.192	0.436	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band XL B and WLAN 5.6G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band XLI	WLAN 5.6G			
Head	Left Cheek	0.211	0.442	0.653	N/A	N/A
	Left Tilt 15 Degree	0.135	0.139	0.274	N/A	N/A
	Right Cheek	0.150	0.281	0.430	N/A	N/A
	Right Tilt 15 Degree	0.105	0.111	0.216	N/A	N/A
Body-Worn	Front Side	0.621	0.139	0.760	N/A	N/A
	Back Side	0.692	0.192	0.884	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band XLI and WLAN 5.6G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band II	WLAN 5.6G			
Head	Left Cheek	0.317	0.442	0.759	N/A	N/A
	Left Tilt 15 Degree	0.175	0.139	0.314	N/A	N/A
	Right Cheek	0.294	0.281	0.575	N/A	N/A
	Right Tilt 15 Degree	0.139	0.111	0.250	N/A	N/A
Body-Worn	Front Side	0.377	0.139	0.516	N/A	N/A
	Back Side	0.494	0.192	0.686	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band II and WLAN 5.6G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band II	WLAN 5.6G			
Head	Left Cheek	0.372	0.442	0.814	N/A	N/A
	Left Tilt 15 Degree	0.218	0.139	0.357	N/A	N/A
	Right Cheek	0.346	0.281	0.627	N/A	N/A

	Right Tilt 15 Degree	0.162	0.111	0.273	N/A	N/A
Body-Worn	Front Side	0.289	0.139	0.428	N/A	N/A
	Back Side	0.571	0.192	0.763	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band II and WLAN 5.6G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		GSM 850	WLAN 5.8G			
Head	Left Cheek	0.420	0.576	0.996	N/A	N/A
	Left Tilt 15 Degree	0.121	0.379	0.500	N/A	N/A
	Right Cheek	0.311	0.258	0.569	N/A	N/A
	Right Tilt 15 Degree	0.126	0.251	0.377	N/A	N/A
Body-Worn	Front Side	0.344	0.189	0.533	N/A	N/A
	Back Side	0.435	0.249	0.684	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of GSM850 and WLAN 5.8G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		GSM 1900	WLAN 5.8G			
Head	Left Cheek	0.283	0.576	0.859	N/A	N/A
	Left Tilt 15 Degree	0.107	0.379	0.486	N/A	N/A
	Right Cheek	0.252	0.258	0.510	N/A	N/A
	Right Tilt 15 Degree	0.118	0.251	0.369	N/A	N/A
Body-Worn	Front Side	0.529	0.189	0.718	N/A	N/A
	Back Side	1.014	0.249	1.263	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of GSM1900 and WLAN 5.8G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band V	WLAN 5.8G			
Head	Left Cheek	0.237	0.576	0.813	N/A	N/A
	Left Tilt 15 Degree	0.100	0.379	0.479	N/A	N/A
	Right Cheek	0.207	0.258	0.465	N/A	N/A
	Right Tilt 15 Degree	0.073	0.251	0.324	N/A	N/A
Body-Worn	Front Side	0.204	0.189	0.393	N/A	N/A
	Back Side	0.262	0.249	0.511	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band V and WLAN 5.8G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band IV	WLAN 5.8G			
Head	Left Cheek	0.294	0.576	0.870	N/A	N/A

Body-Worn	Left Tilt 15 Degree	0.197	0.379	0.576	N/A	N/A
	Right Cheek	0.273	0.258	0.531	N/A	N/A
	Right Tilt 15 Degree	0.185	0.251	0.435	N/A	N/A
	Front Side	0.259	0.189	0.449	N/A	N/A
	Back Side	0.753	0.249	1.001	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band IV and WLAN 5.8G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band V	WLAN 5.8G			
Head	Left Cheek	0.301	0.576	0.877	N/A	N/A
	Left Tilt 15 Degree	0.137	0.379	0.516	N/A	N/A
	Right Cheek	0.260	0.258	0.518	N/A	N/A
	Right Tilt 15 Degree	0.115	0.251	0.366	N/A	N/A
Body-Worn	Front Side	0.161	0.189	0.350	N/A	N/A
	Back Side	0.322	0.249	0.571	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band V and WLAN 5.8G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band IV	WLAN 5.8G			
Head	Left Cheek	0.427	0.576	1.003	N/A	N/A
	Left Tilt 15 Degree	0.137	0.379	0.516	N/A	N/A
	Right Cheek	0.287	0.258	0.545	N/A	N/A
	Right Tilt 15 Degree	0.087	0.251	0.338	N/A	N/A
Body-Worn	Front Side	0.540	0.189	0.729	N/A	N/A
	Back Side	1.109	0.249	1.358	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band IV and WLAN 5.8G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band VII	WLAN 5.8G			
Head	Left Cheek	0.064	0.576	0.640	N/A	N/A
	Left Tilt 15 Degree	0.046	0.379	0.425	N/A	N/A
	Right Cheek	0.052	0.258	0.310	N/A	N/A
	Right Tilt 15 Degree	0.041	0.251	0.292	N/A	N/A
Body-Worn	Front Side	0.289	0.189	0.478	N/A	N/A
	Back Side	0.571	0.249	0.820	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band VII and WLAN 5.8G.

Test Position	Scaled SAR _{MAX}		Σ 1-g SAR	SPLSR	Remark
---------------	---------------------------	--	------------------	-------	--------

		LTE Band XXXVIII	WLAN 5.8G	(W/Kg)		
Head	Left Cheek	0.114	0.576	0.690	N/A	N/A
	Left Tilt 15 Degree	0.057	0.379	0.435	N/A	N/A
	Right Cheek	0.089	0.258	0.348	N/A	N/A
	Right Tilt 15 Degree	0.061	0.251	0.312	N/A	N/A
Body-Worn	Front Side	0.105	0.189	0.294	N/A	N/A
	Back Side	0.382	0.249	0.631	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band XXXVIII and WLAN 5.8G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band XL A	WLAN 5.8G			
Head	Left Cheek	0.083	0.576	0.659	N/A	N/A
	Left Tilt 15 Degree	0.040	0.379	0.418	N/A	N/A
	Right Cheek	0.069	0.258	0.328	N/A	N/A
	Right Tilt 15 Degree	0.030	0.251	0.281	N/A	N/A
Body-Worn	Front Side	0.176	0.189	0.366	N/A	N/A
	Back Side	0.398	0.249	0.646	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band XL A and WLAN 5.8G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band XL B	WLAN 5.8G			
Head	Left Cheek	0.060	0.576	0.636	N/A	N/A
	Left Tilt 15 Degree	0.028	0.379	0.407	N/A	N/A
	Right Cheek	0.041	0.258	0.299	N/A	N/A
	Right Tilt 15 Degree	0.021	0.251	0.272	N/A	N/A
Body-Worn	Front Side	0.105	0.189	0.295	N/A	N/A
	Back Side	0.244	0.249	0.493	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band XL B and WLAN 5.8G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band XLI	WLAN 5.8G			
Head	Left Cheek	0.211	0.576	0.787	N/A	N/A
	Left Tilt 15 Degree	0.135	0.379	0.514	N/A	N/A
	Right Cheek	0.150	0.258	0.408	N/A	N/A
	Right Tilt 15 Degree	0.105	0.251	0.356	N/A	N/A

Body-Worn	Front Side	0.621	0.189	0.810	N/A	N/A
	Back Side	0.692	0.249	0.941	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band XLI and WLAN 5.8G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		WCDMA Band II	WLAN 5.8G			
Head	Left Cheek	0.317	0.576	0.893	N/A	N/A
	Left Tilt 15 Degree	0.175	0.379	0.554	N/A	N/A
	Right Cheek	0.294	0.258	0.552	N/A	N/A
	Right Tilt 15 Degree	0.139	0.251	0.390	N/A	N/A
Body-Worn	Front Side	0.377	0.189	0.566	N/A	N/A
	Back Side	0.494	0.249	0.743	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of WCDMA Band II and WLAN 5.8G.

Test Position		Scaled SAR _{MAX}		Σ 1-g SAR (W/Kg)	SPLSR	Remark
		LTE Band II	WLAN 5.8G			
Head	Left Cheek	0.372	0.576	0.948	N/A	N/A
	Left Tilt 15 Degree	0.218	0.379	0.597	N/A	N/A
	Right Cheek	0.346	0.258	0.604	N/A	N/A
	Right Tilt 15 Degree	0.162	0.251	0.413	N/A	N/A
Body-Worn	Front Side	0.289	0.189	0.478	N/A	N/A
	Back Side	0.571	0.249	0.820	N/A	N/A

NOTE: 1-g SAR Simultaneous Tx Combination of LTE Band II and WLAN 5.8G.

11. Appendix A. Photo documentation

Refer to appendix Test Setup photo---SAR

12. Appendix B. System Check Plots

Table of contents
MEASUREMENT 1 System Performance Check - SID835 - Head
MEASUREMENT 2 System Performance Check - SID835 - Body
MEASUREMENT 3 System Performance Check - SID1800 - Head
MEASUREMENT 4 System Performance Check - SID1800 - Body
MEASUREMENT 5 System Performance Check - SID1900 - Head
MEASUREMENT 6 System Performance Check - SID1900 - Body
MEASUREMENT 7 System Performance Check - SID2300 - Head
MEASUREMENT 8 System Performance Check - SID2300 - Body
MEASUREMENT 9 System Performance Check - SID2450 - Head
MEASUREMENT 10 System Performance Check - SID2450 - Body
MEASUREMENT 11 System Performance Check - SID2600 - Head
MEASUREMENT 12 System Performance Check - SID2600 - Body
MEASUREMENT 13 System Performance Check - SID5200 - Head
MEASUREMENT 14 System Performance Check - SID5200 - Body
MEASUREMENT 15 System Performance Check - SID5400 - Head
MEASUREMENT 16 System Performance Check - SID5400 - Body
MEASUREMENT 17 System Performance Check - SID5600 - Head
MEASUREMENT 18 System Performance Check - SID5600 - Body
MEASUREMENT 19 System Performance Check - SID5800 - Head
MEASUREMENT 20 System Performance Check - SID5800 - Body
MEASUREMENT 21 System Performance Check - SID1900 - Head
MEASUREMENT 22 System Performance Check - SID1900 - Body

MEASUREMENT 1


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW835</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	835.000000
Relative permittivity (real part)	41.632213
Relative permittivity (imaginary part)	19.658060
Conductivity (S/m)	0.913049
Variation (%)	-0.310000

SURFACE SAR

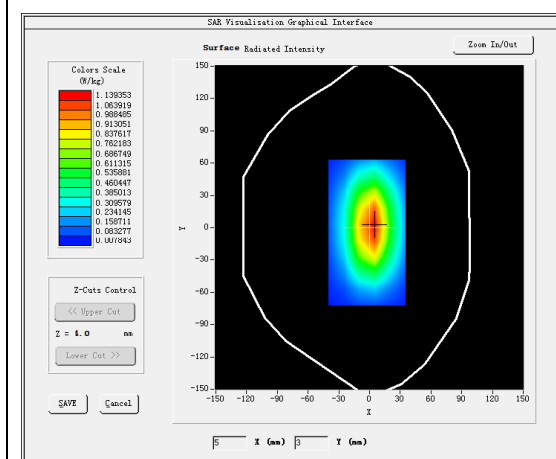



VOLUME SAR

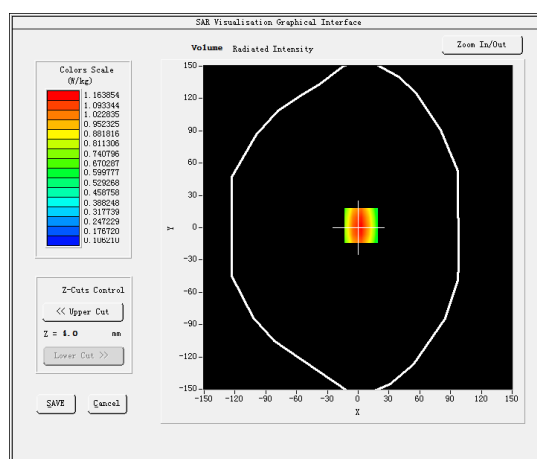

Maximum location: X=3.00, Y=2.00

SAR Peak: 1.60 W/kg

SAR 10g (W/Kg)	0.661947
SAR 1g (W/Kg)	1.019679

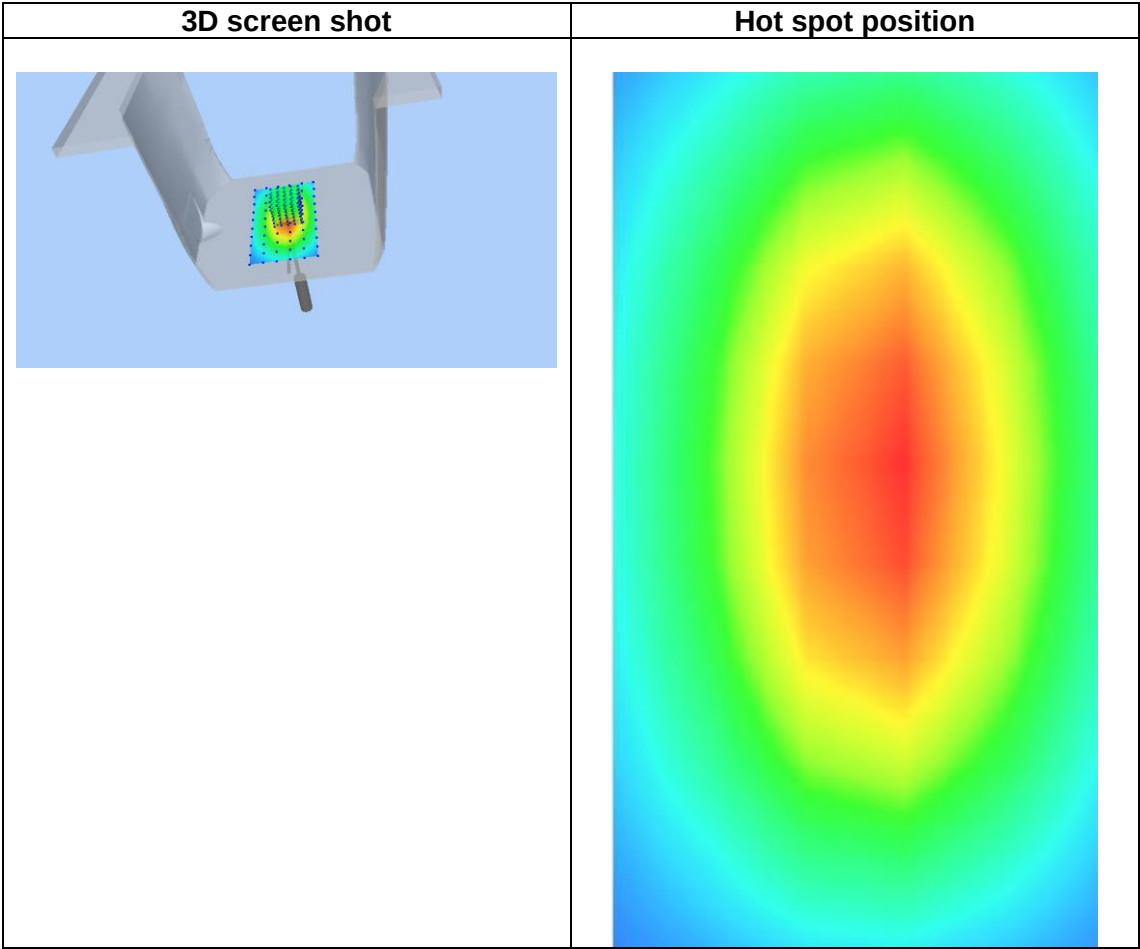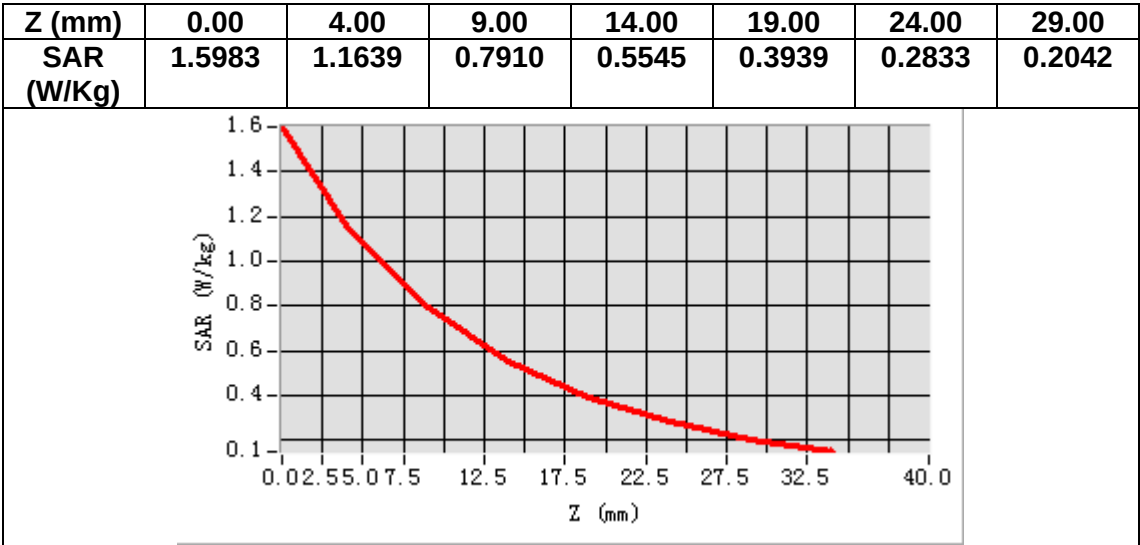

MEASUREMENT 2


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW835</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	835.000000
Relative permittivity (real part)	54.802213
Relative permittivity (imaginary part)	21.017100
Conductivity (S/m)	0.973049
Variation (%)	0.030000

SURFACE SAR

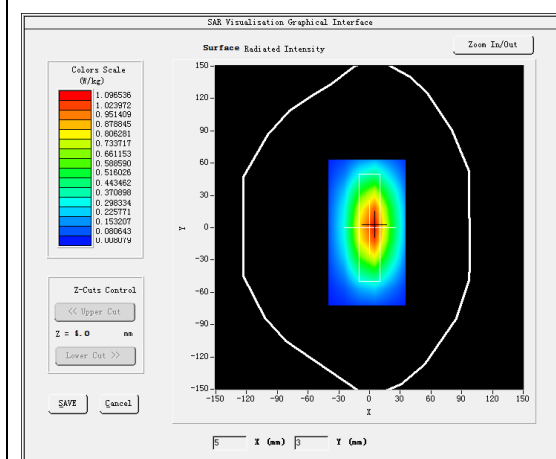


VOLUME SAR

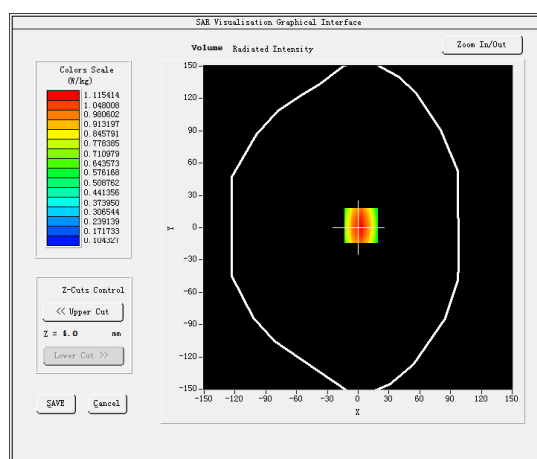


Maximum location: X=3.00, Y=2.00

SAR Peak: 1.52 W/kg


SAR 10g (W/Kg)	0.654107
SAR 1g (W/Kg)	0.989834

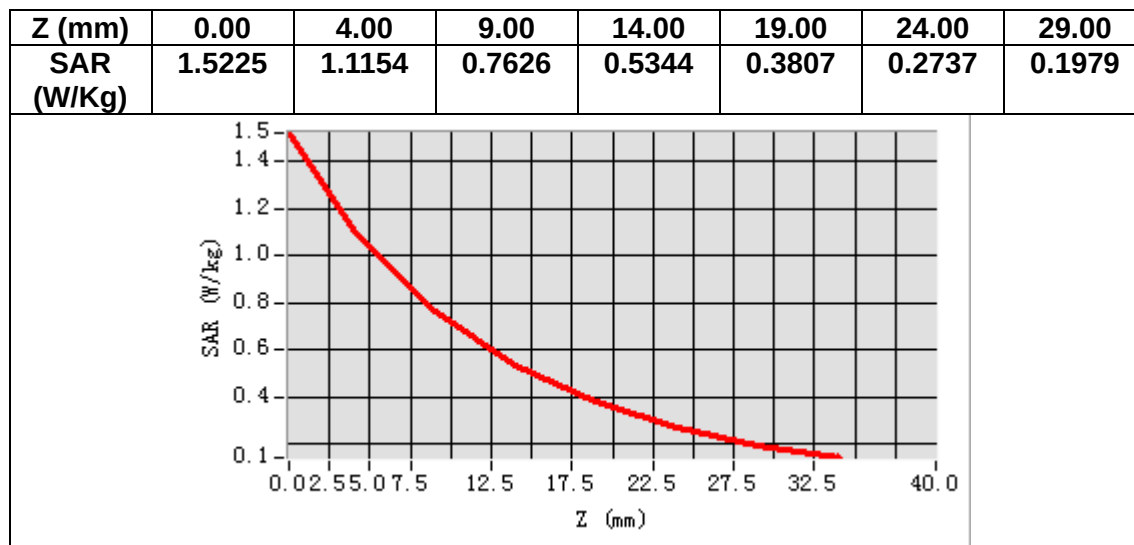

3D screen shot

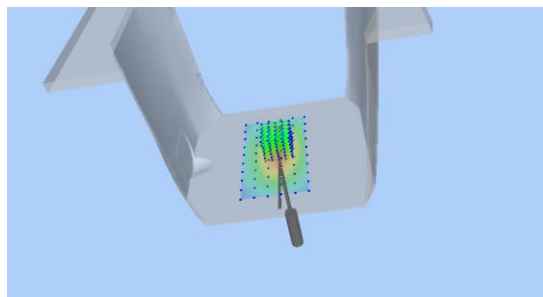

Hot spot position

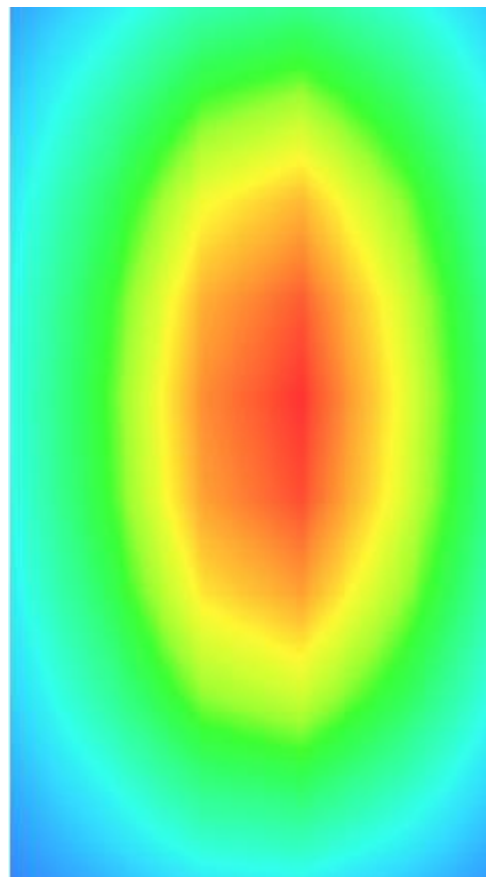

MEASUREMENT 3


A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Dipole</u>
Band	<u>CW1800</u>
Channels	<u>Low</u>
Signal	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1800.000000
Relative permittivity (real part)	39.565899
Relative permittivity (imaginary part)	14.037442
Conductivity (S/m)	1.400587
Variation (%)	0.040000

SURFACE SAR

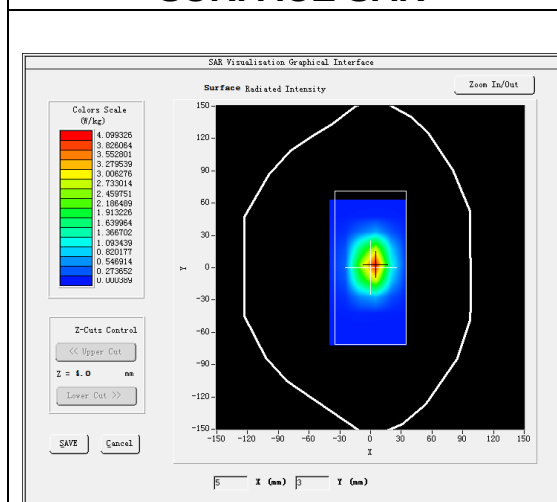



VOLUME SAR

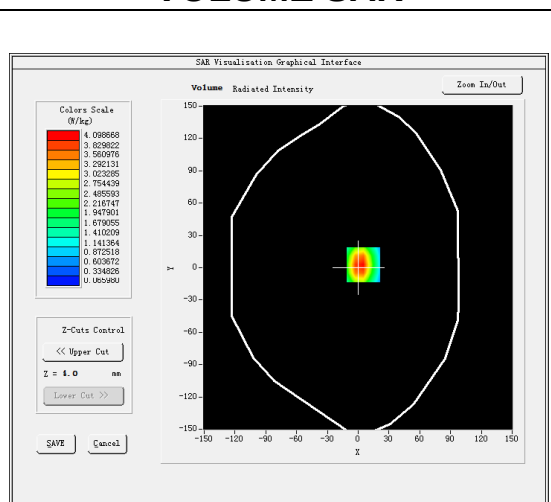

Maximum location: X=5.00, Y=3.00

SAR Peak: 6.70 W/kg

SAR 10g (W/Kg)	2.095219
SAR 1g (W/Kg)	4.091322

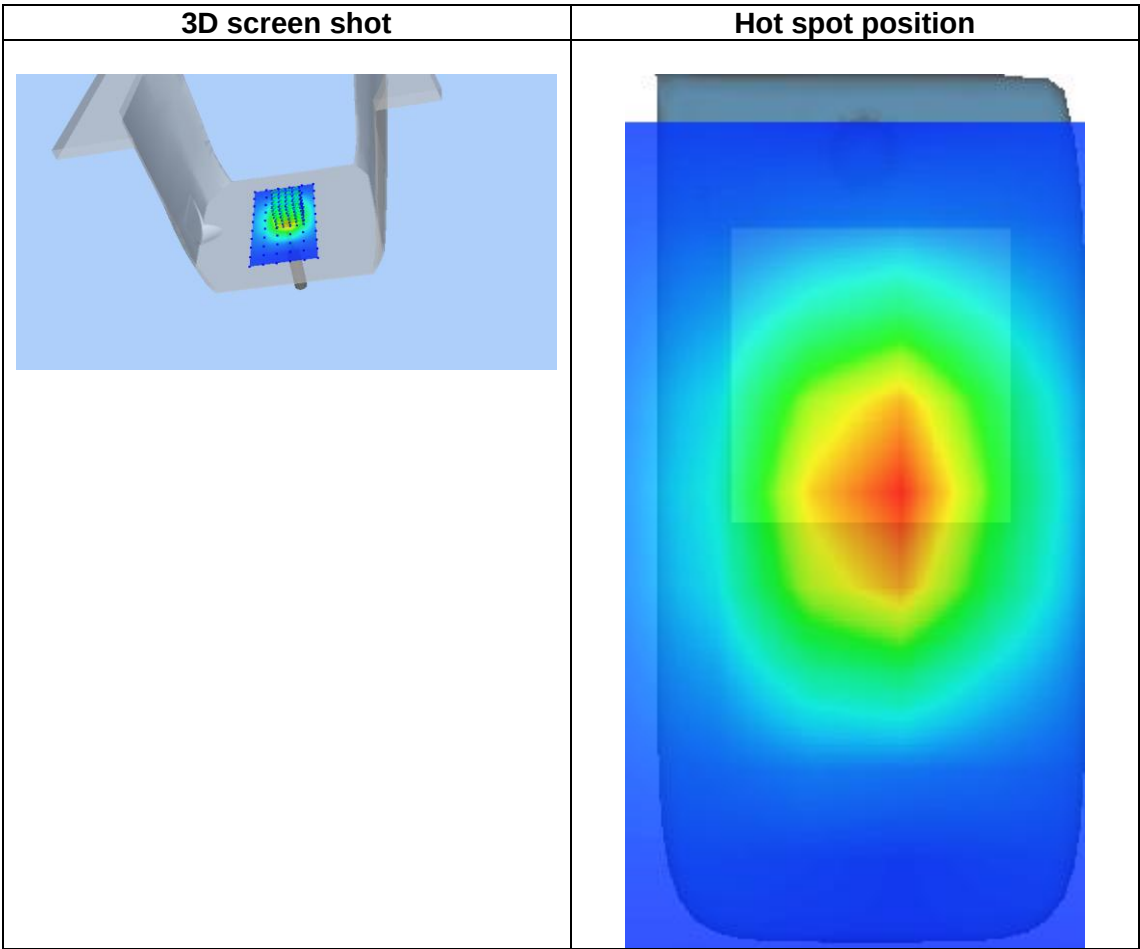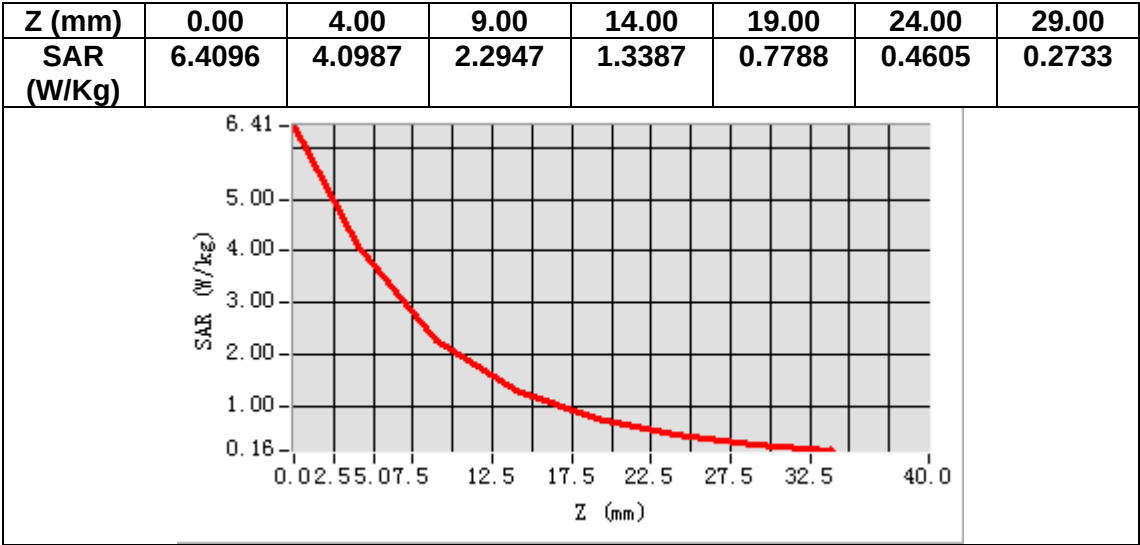

MEASUREMENT 4


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW1800</u>
<u>Channels</u>	<u>Low</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1800.000000
Relative permittivity (real part)	53.675899
Relative permittivity (imaginary part)	15.331470
Conductivity (S/m)	1.525587
Variation (%)	-0.440000

SURFACE SAR

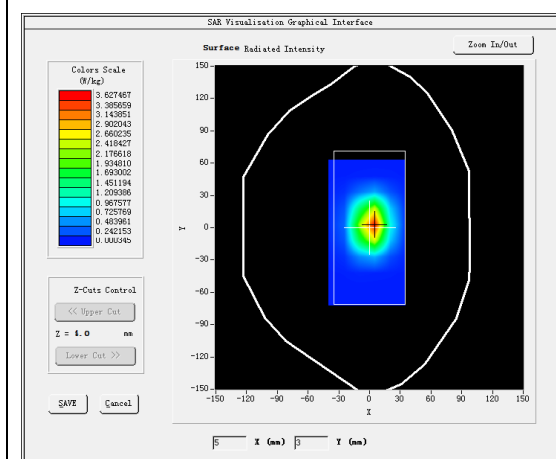



VOLUME SAR

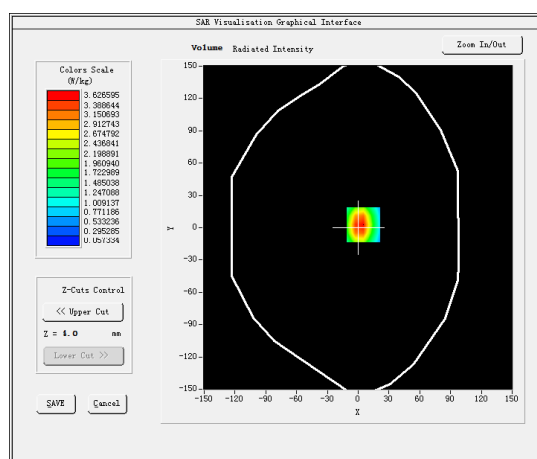

Maximum location: X=5.00, Y=3.00

SAR Peak: 5.96 W/kg

SAR 10g (W/Kg)	1.959697
SAR 1g (W/Kg)	3.628168

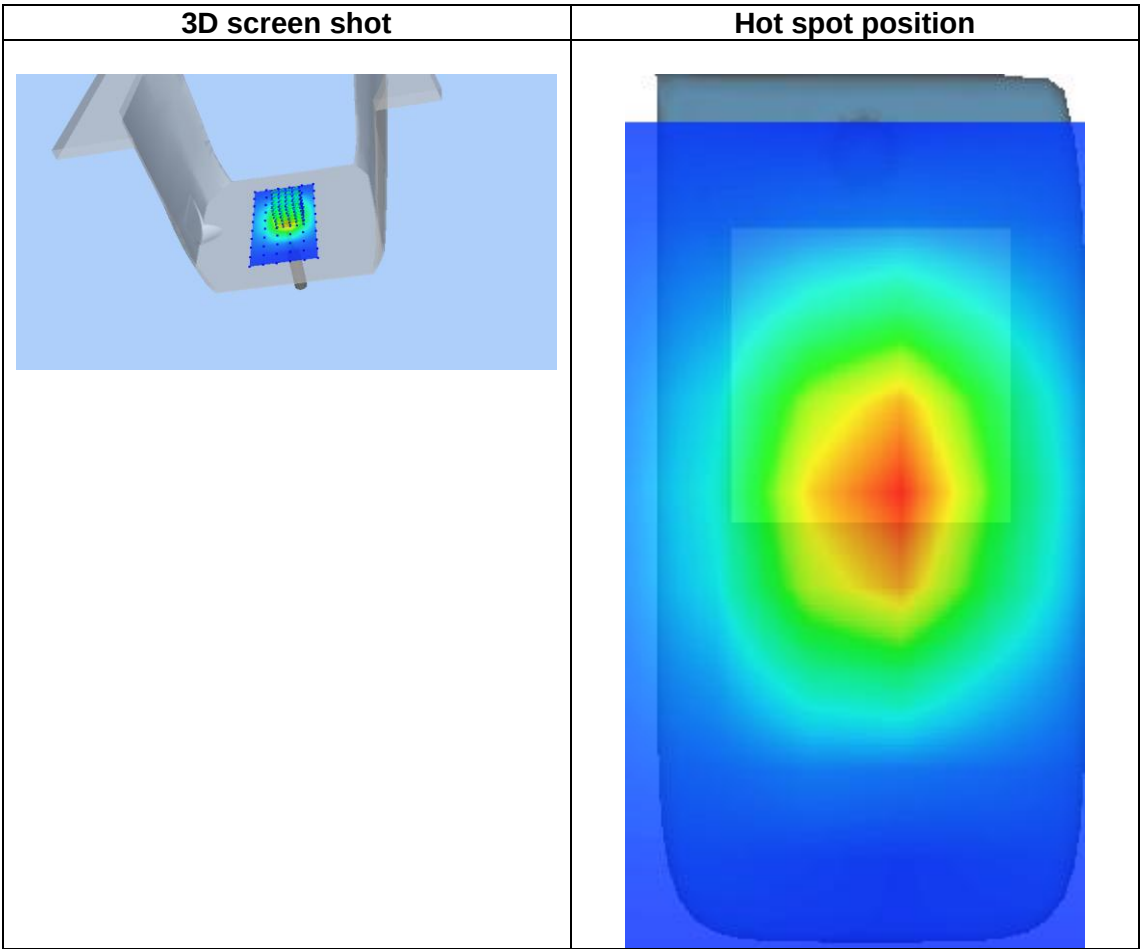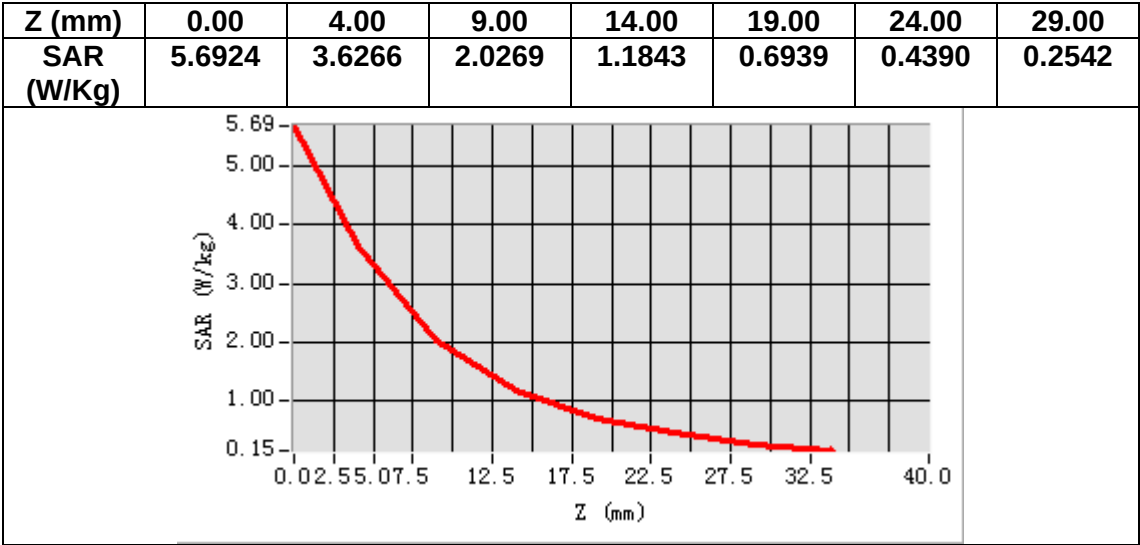

MEASUREMENT 5


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW1900</u>
<u>Channels</u>	<u>Low</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1900.000000
Relative permittivity (real part)	39.675899
Relative permittivity (imaginary part)	13.534900
Conductivity (S/m)	1.425587
Variation (%)	0.450000

SURFACE SAR

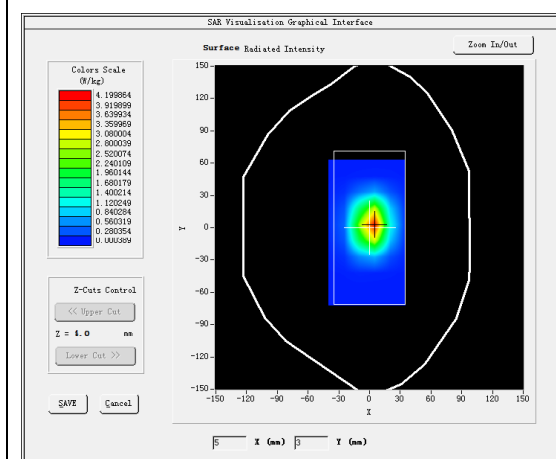



VOLUME SAR

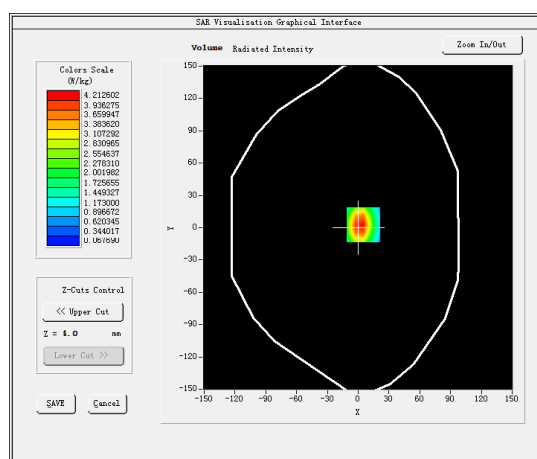

Maximum location: X=5.00, Y=3.00

SAR Peak: 6.89 W/kg

SAR 10g (W/Kg)	2.156578
SAR 1g (W/Kg)	4.209410

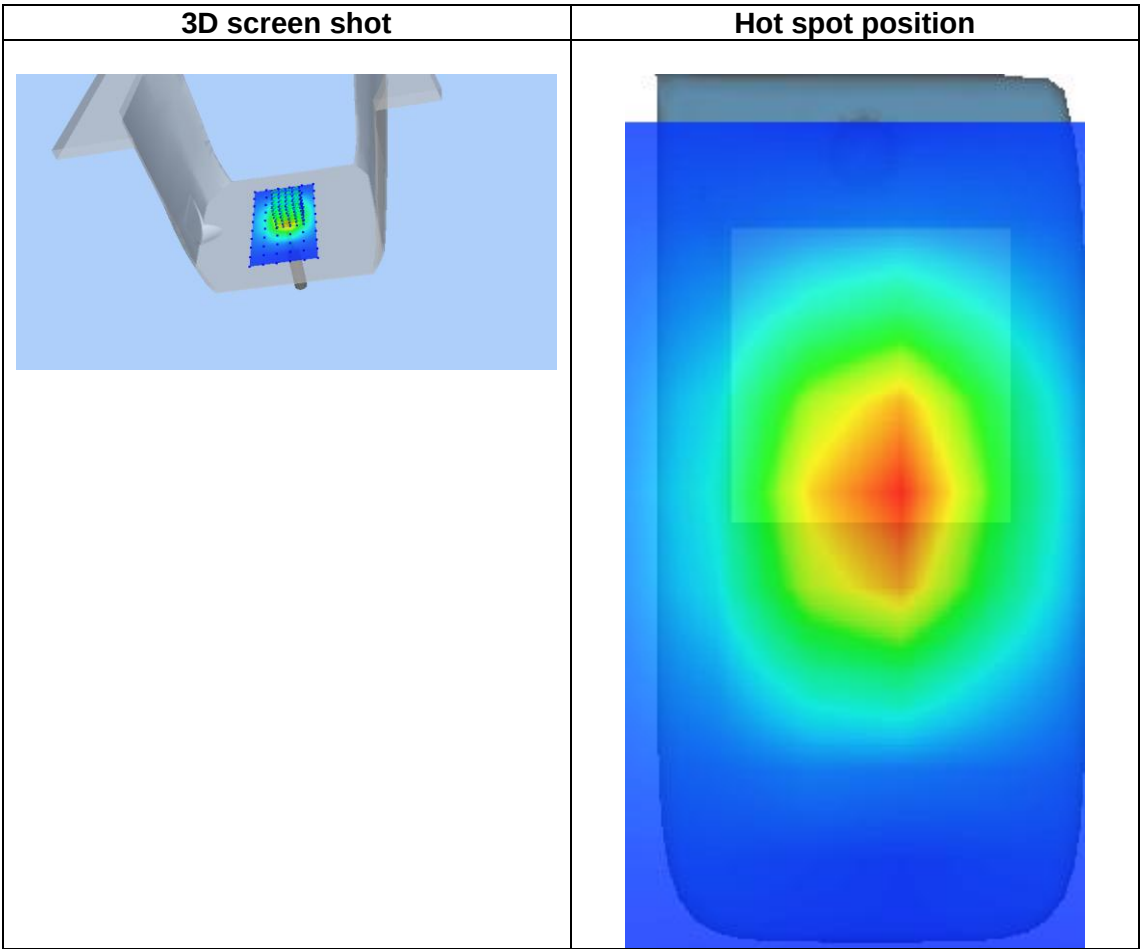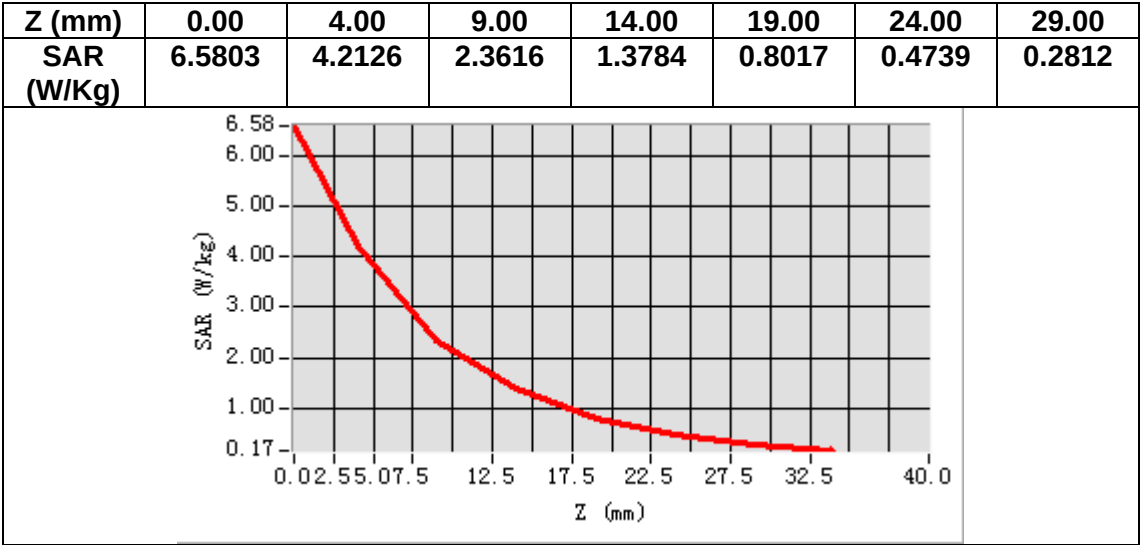

MEASUREMENT 6


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW1900</u>
<u>Channels</u>	<u>Low</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1900.000000
Relative permittivity (real part)	54.035899
Relative permittivity (imaginary part)	14.409700
Conductivity (S/m)	1.521587
Variation (%)	0.240000

SURFACE SAR

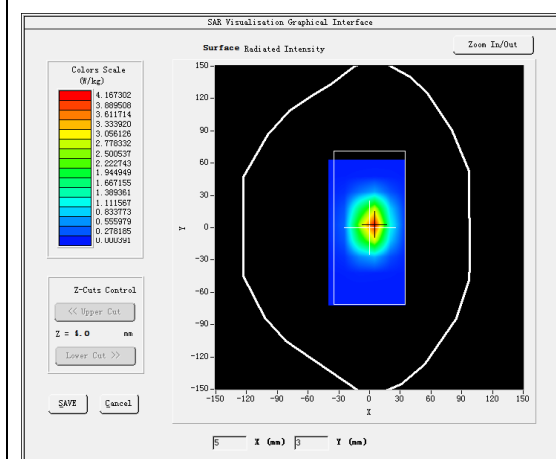



VOLUME SAR

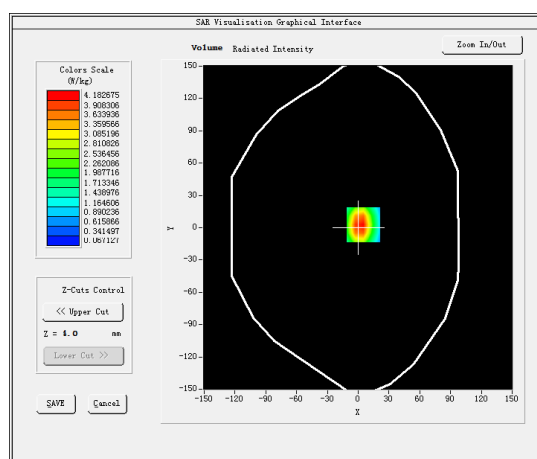

Maximum location: X=5.00, Y=3.00

SAR Peak: 6.84 W/kg

SAR 10g (W/Kg)	2.139582
SAR 1g (W/Kg)	4.179937

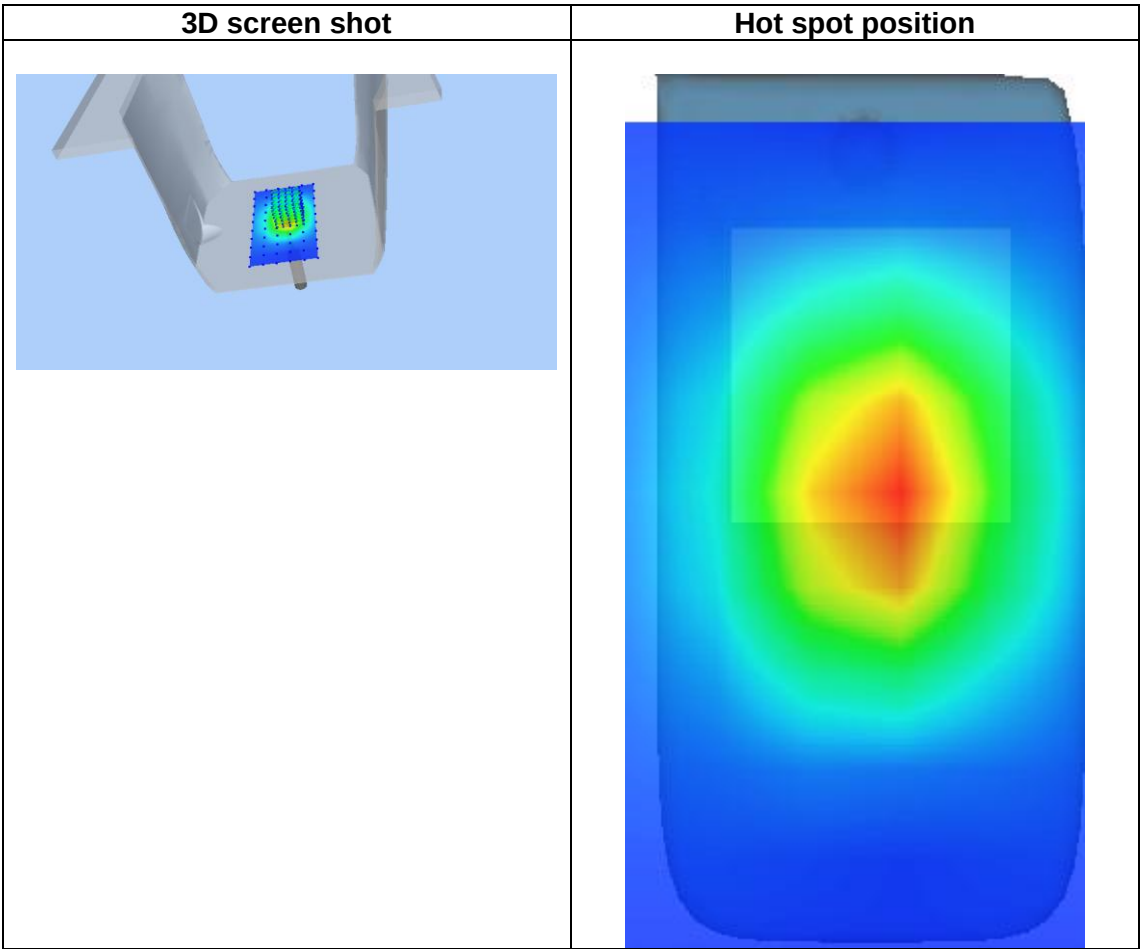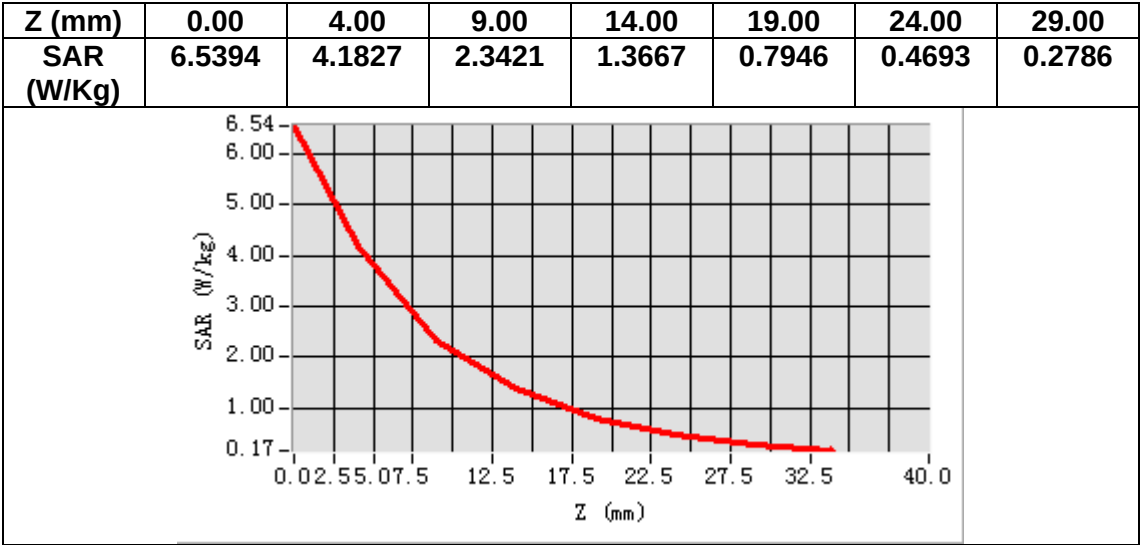

MEASUREMENT 7


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2300</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	2300.000000
Relative permittivity (real part)	39.447691
Relative permittivity (imaginary part)	13.213442
Conductivity (S/m)	1.691344
Variation (%)	-0.460000

SURFACE SAR

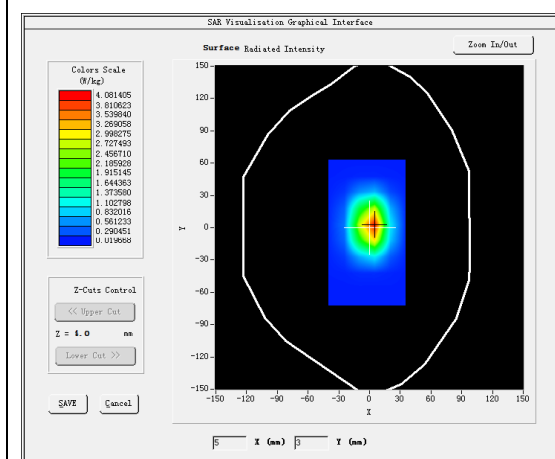



VOLUME SAR

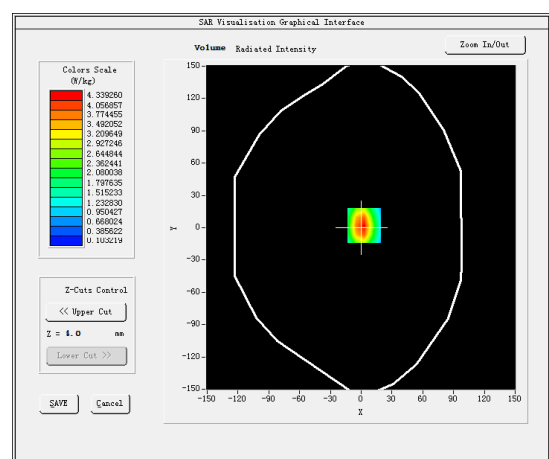

Maximum location: X=3.00, Y=2.00

SAR Peak: 6.82 W/kg

SAR 10g (W/Kg)	2.305357
SAR 1g (W/Kg)	4.853276

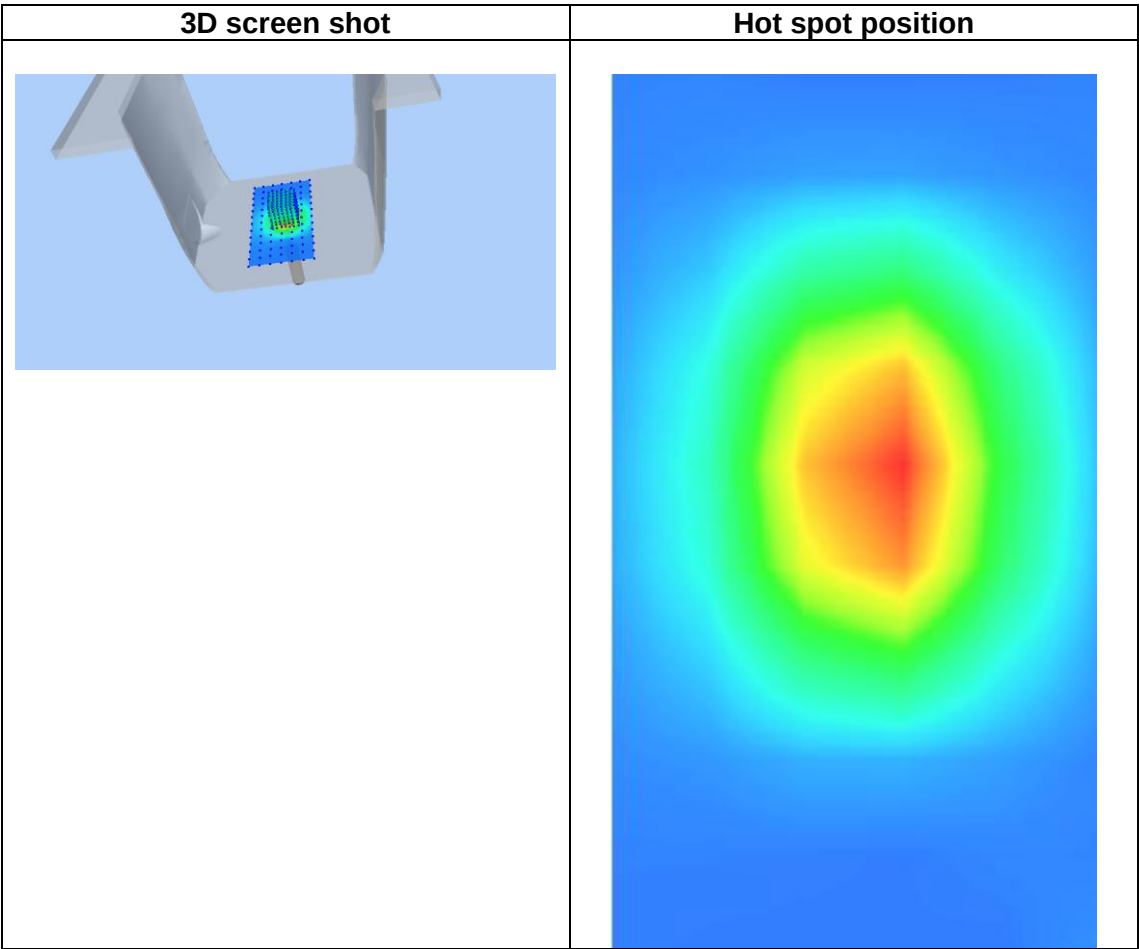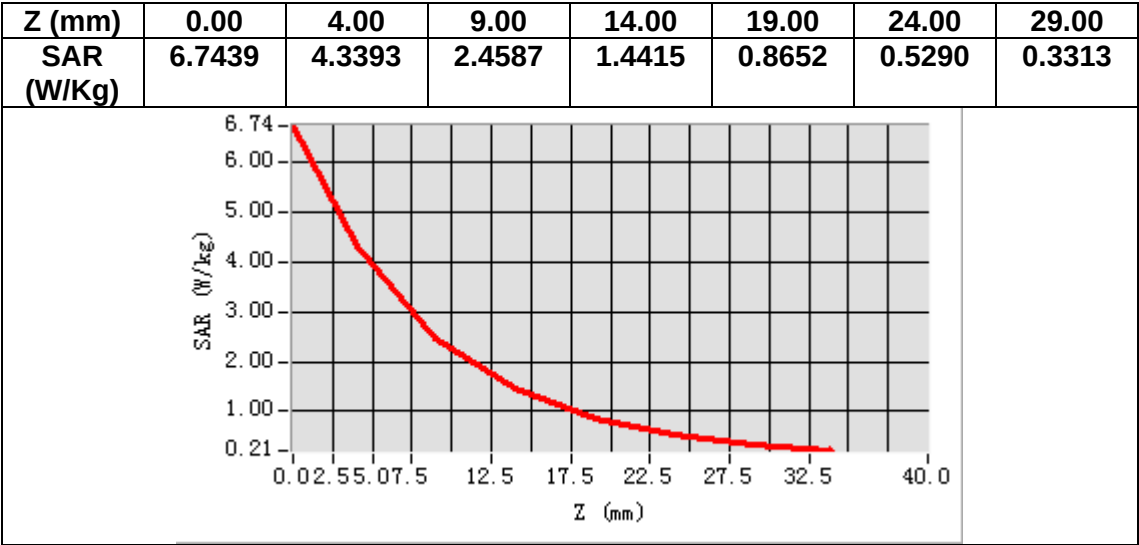

MEASUREMENT 8


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2300</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	2300.000000
Relative permittivity (real part)	52.475098
Relative permittivity (imaginary part)	13.989900
Conductivity (S/m)	1.788656
Variation (%)	0.680000

SURFACE SAR

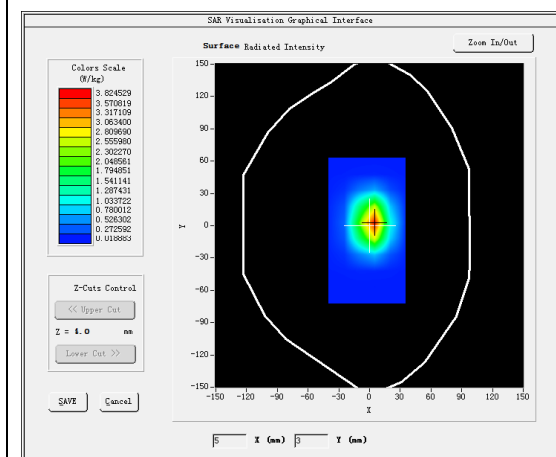



VOLUME SAR

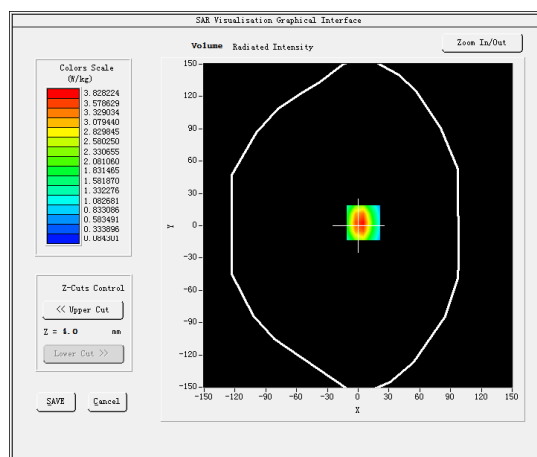

Maximum location: X=5.00, Y=3.00

SAR Peak: 6.10 W/kg

SAR 10g (W/Kg)	2.116127
SAR 1g (W/Kg)	4.560725

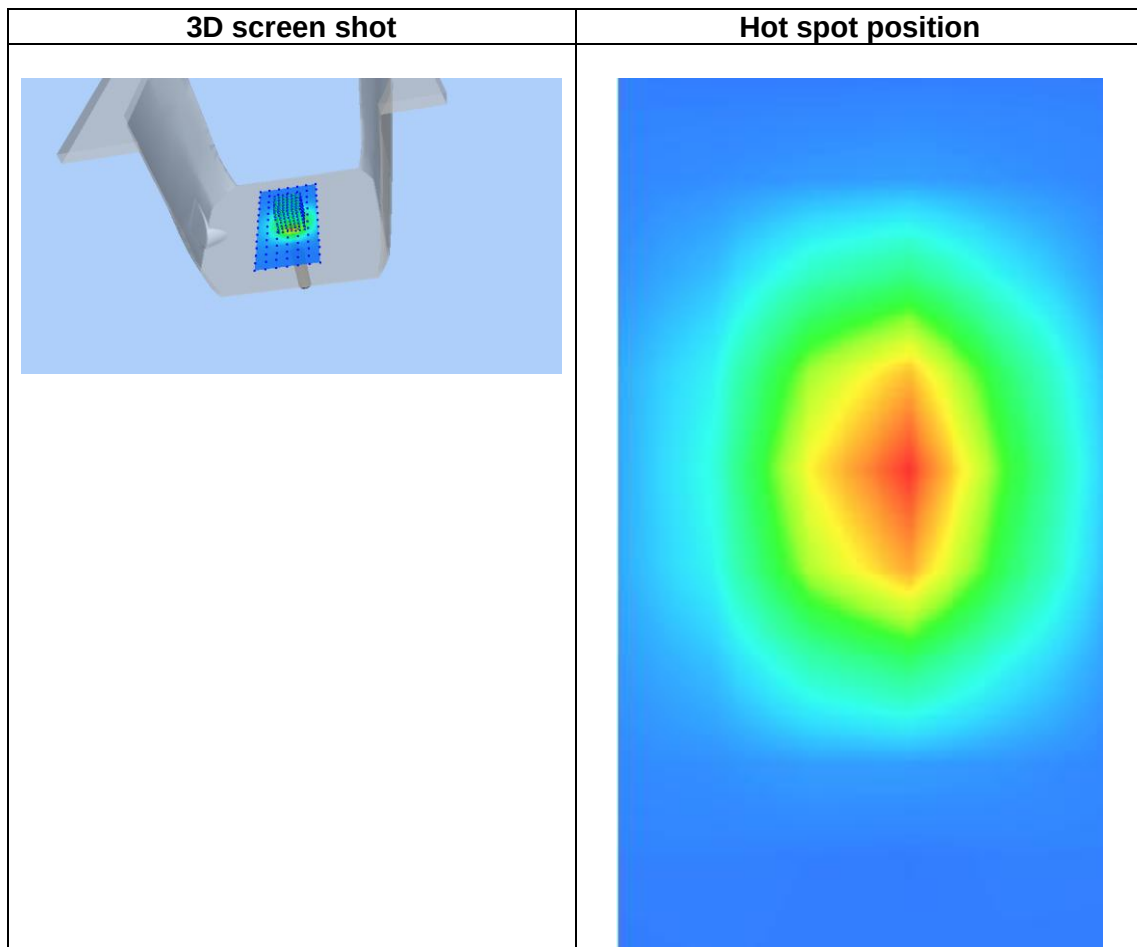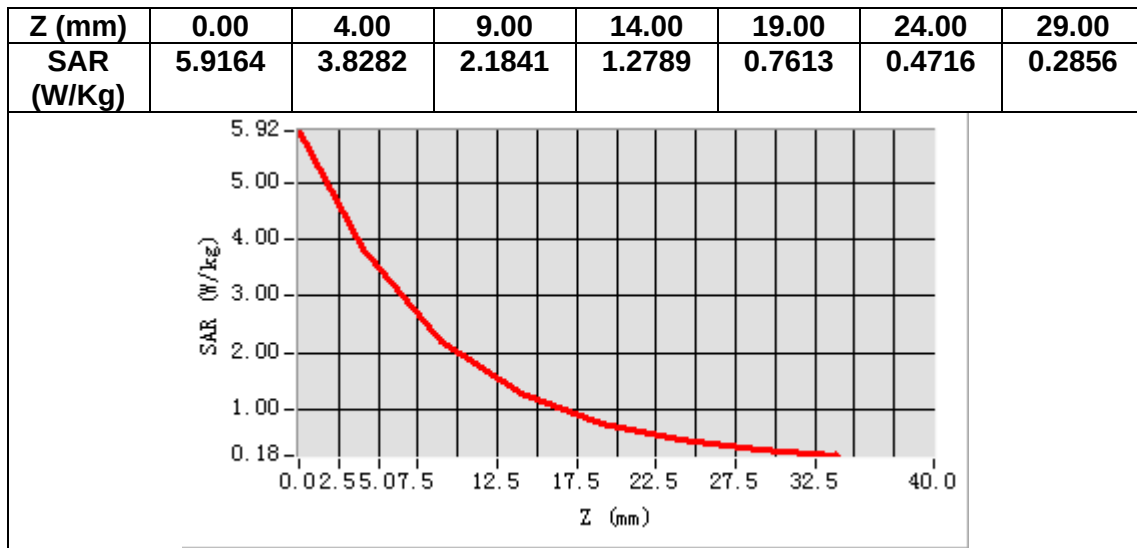

MEASUREMENT 9


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2450</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	2450.000000
Relative permittivity (real part)	39.674097
Relative permittivity (imaginary part)	13.461200
Conductivity (S/m)	1.826738
Variation (%)	0.080000

SURFACE SAR

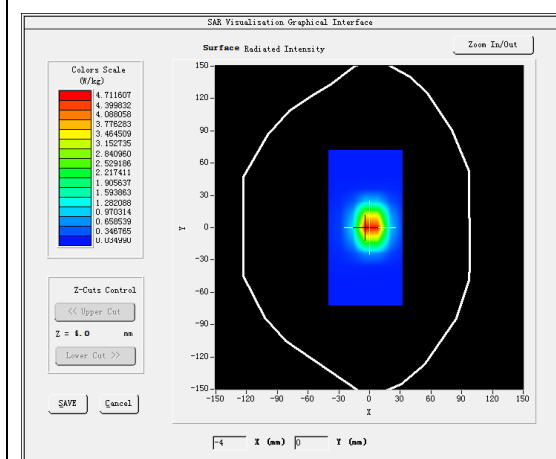



VOLUME SAR

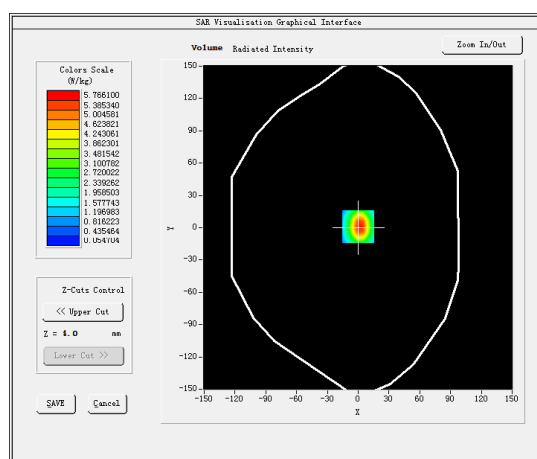

Maximum location: X=0.00, Y=1.00

SAR Peak: 10.26 W/kg

SAR 10g (W/Kg)	2.383467
SAR 1g (W/Kg)	5.430825

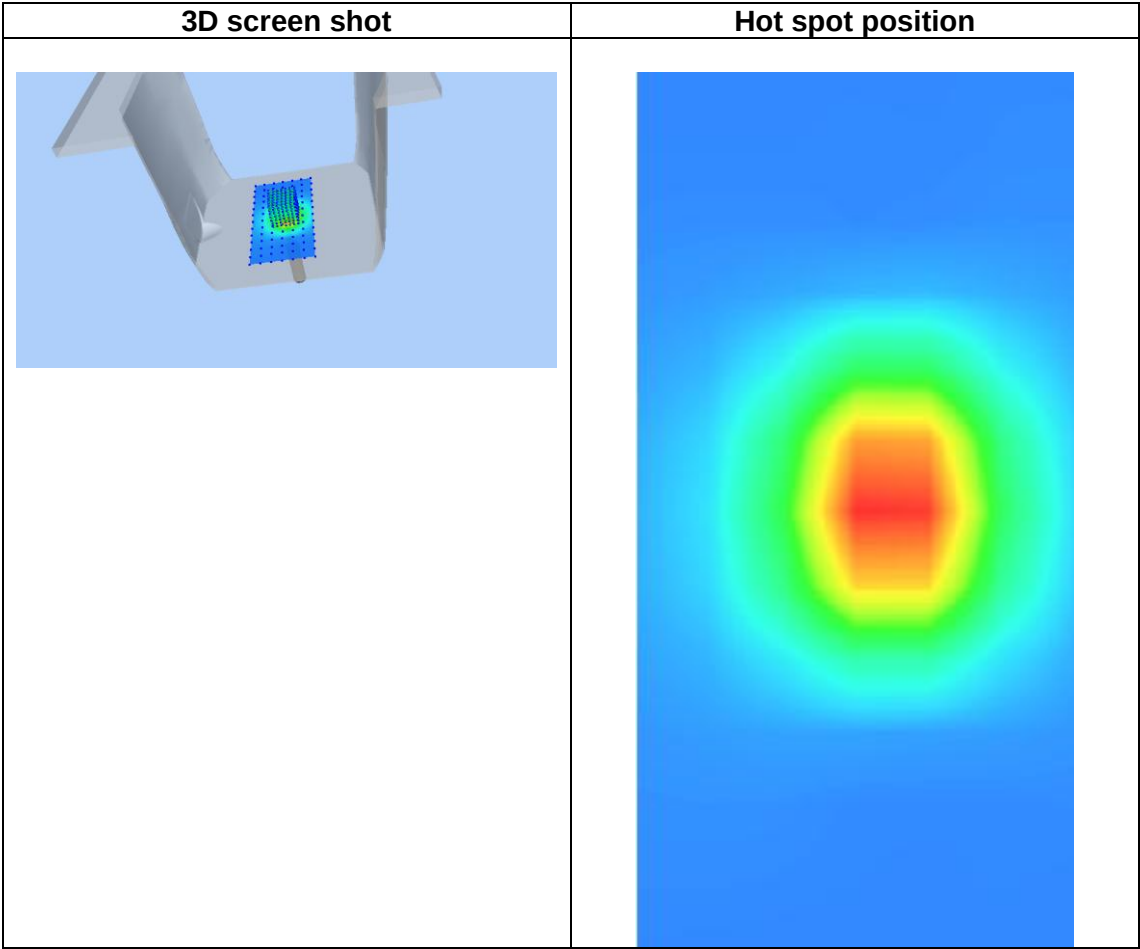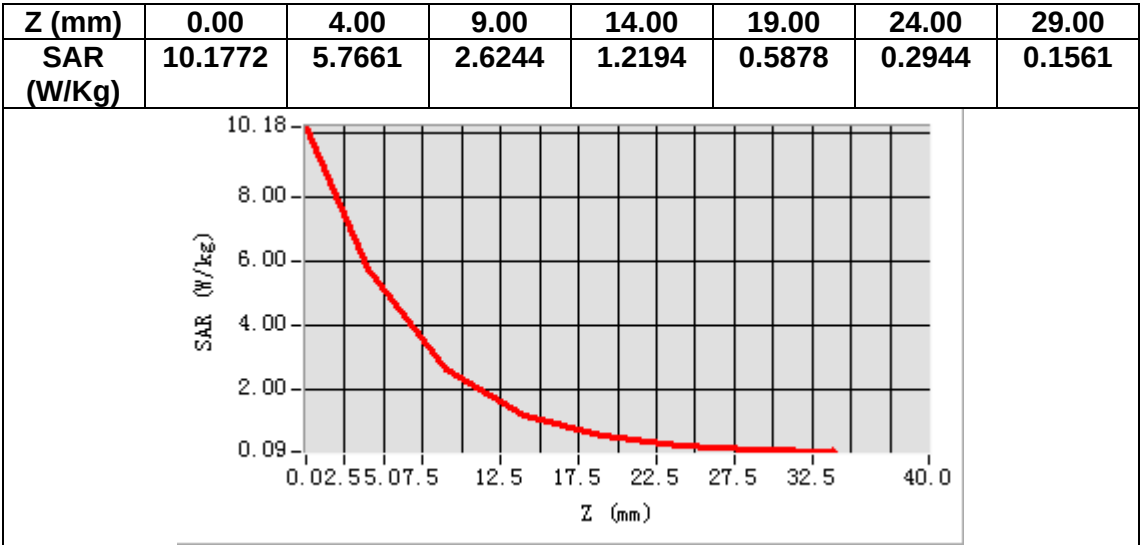

MEASUREMENT 10


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2450</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	2450.000000
Relative permittivity (real part)	52.104097
Relative permittivity (imaginary part)	14.41352
Conductivity (S/m)	1.956738
Variation (%)	-0.300000

SURFACE SAR

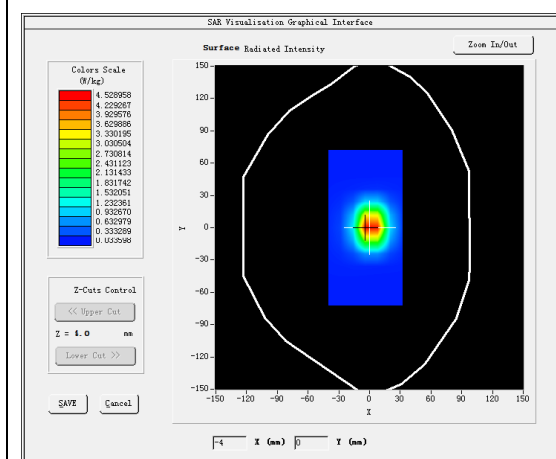



VOLUME SAR

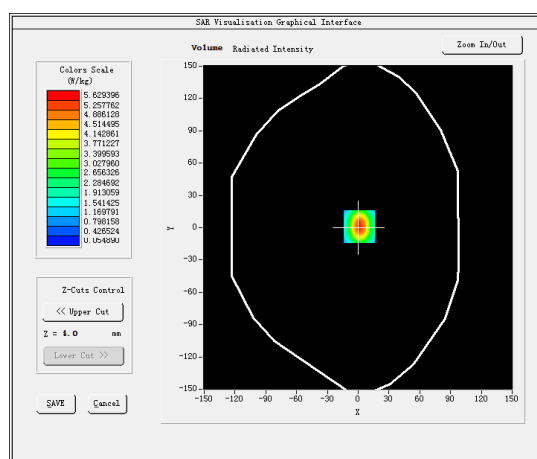

Maximum location: X=1.00, Y=1.00

SAR Peak: 9.81 W/kg

SAR 10g (W/Kg)	2.300919
SAR 1g (W/Kg)	5.198616

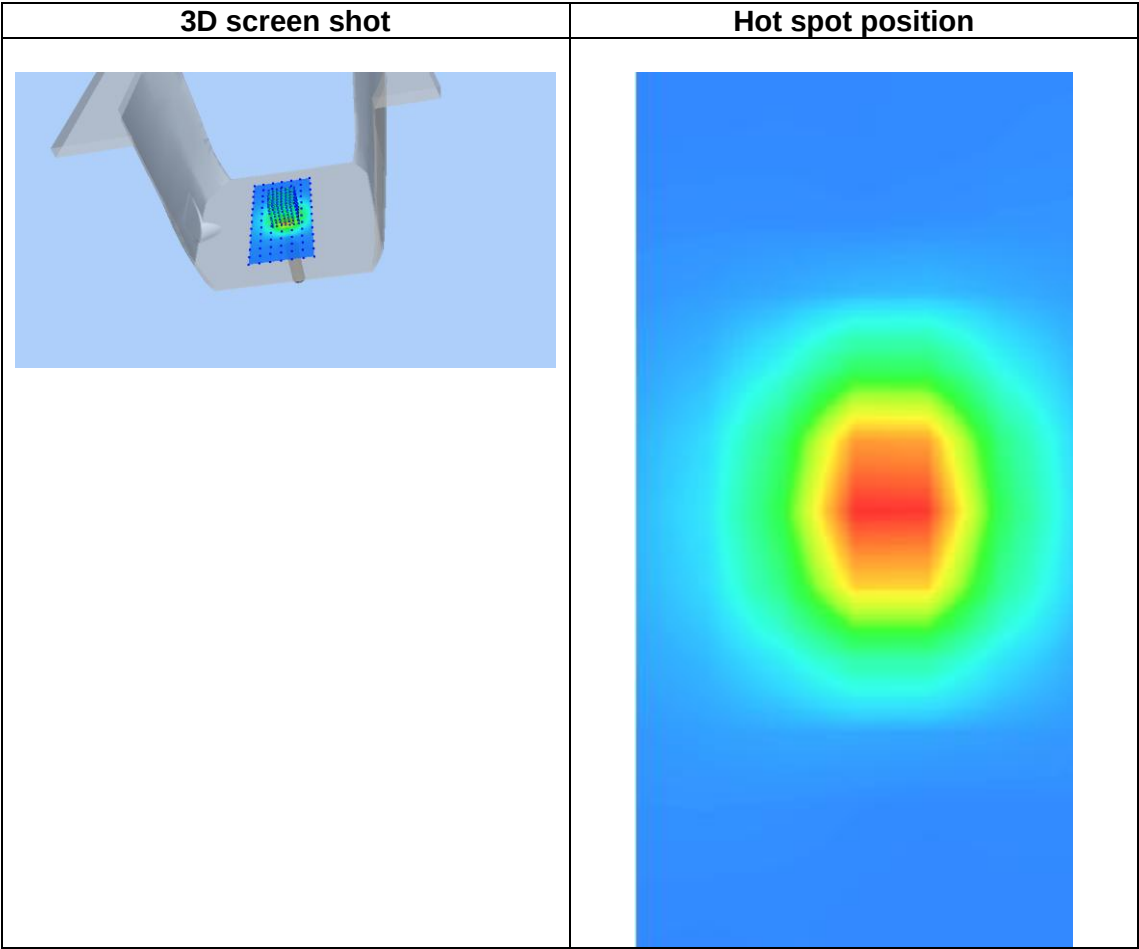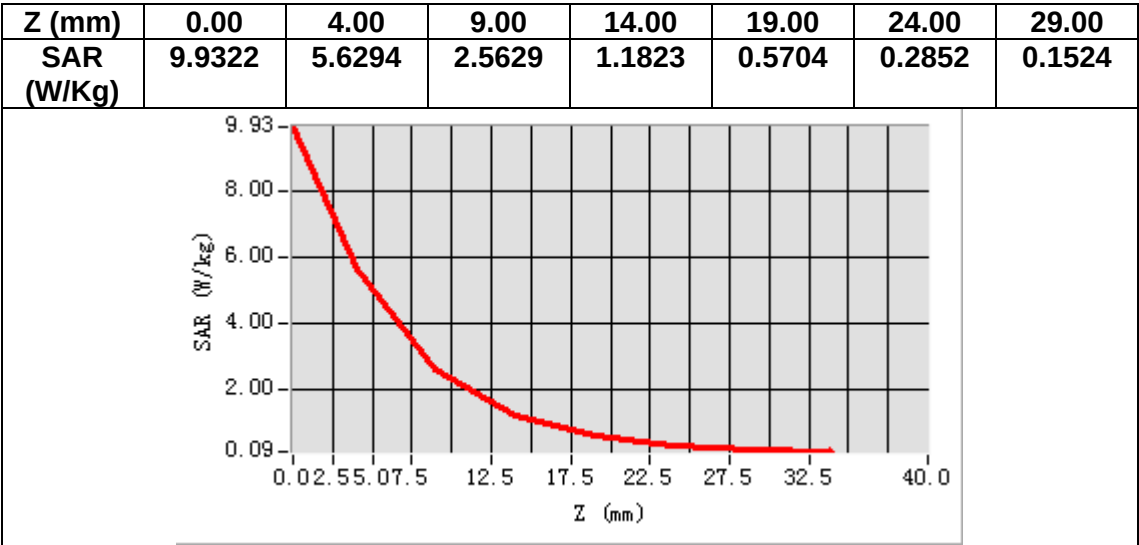

MEASUREMENT 11


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2600</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	2600.000000
Relative permittivity (real part)	38.972343
Relative permittivity (imaginary part)	13.639260
Conductivity (S/m)	1.970111
Variation (%)	-0.200000

SURFACE SAR

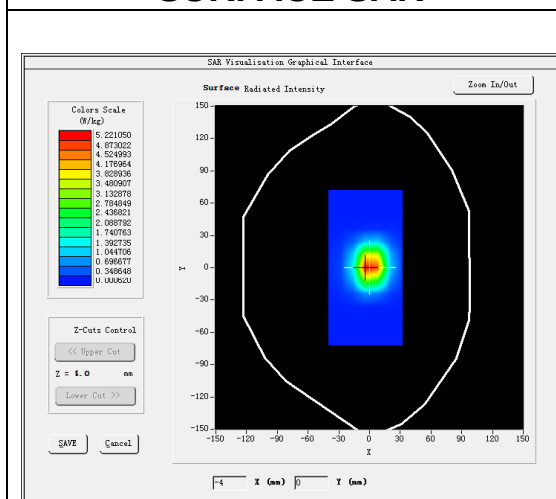



VOLUME SAR

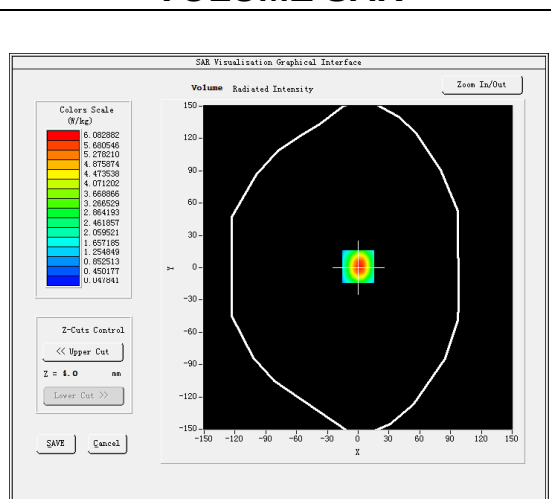

Maximum location: X=0.00, Y=1.00

SAR Peak: 9.96 W/kg

SAR 10g (W/Kg)	2.688761
SAR 1g (W/Kg)	5.617330

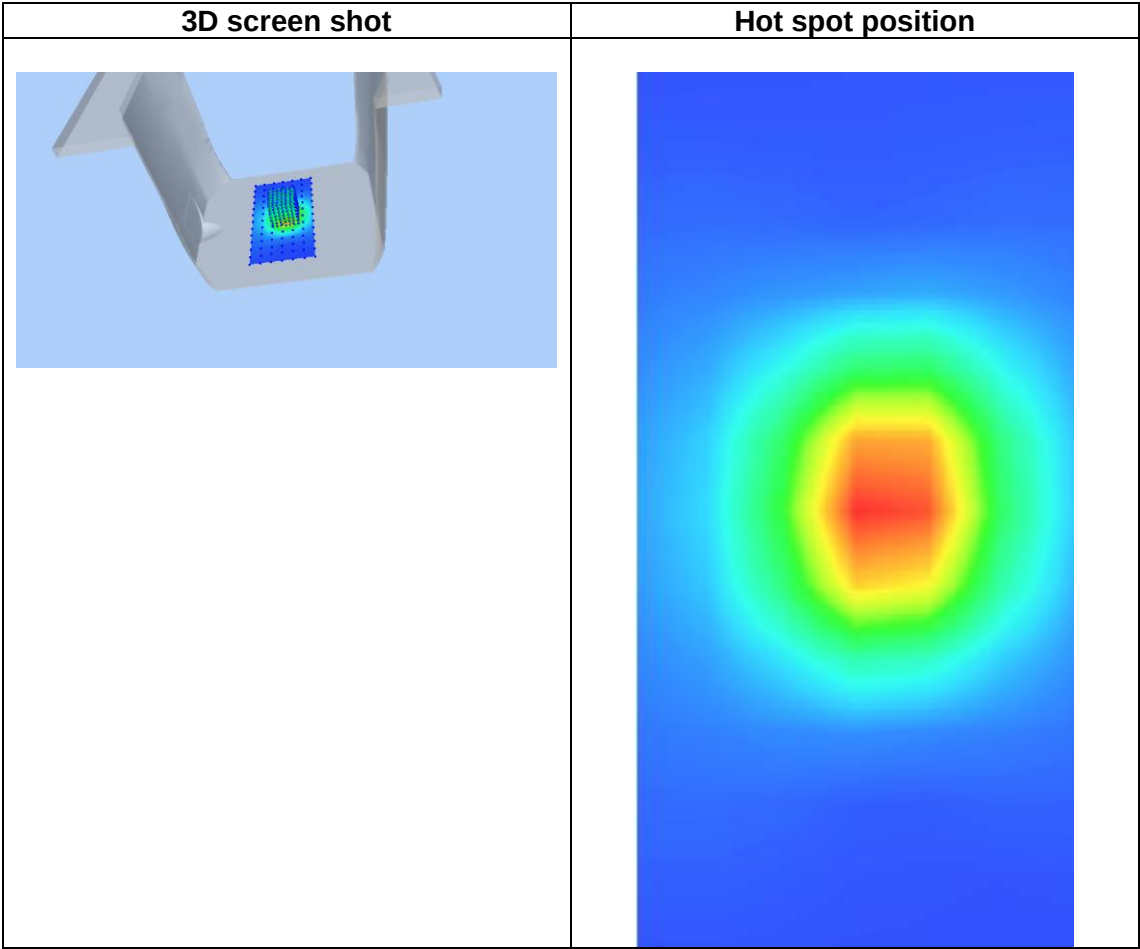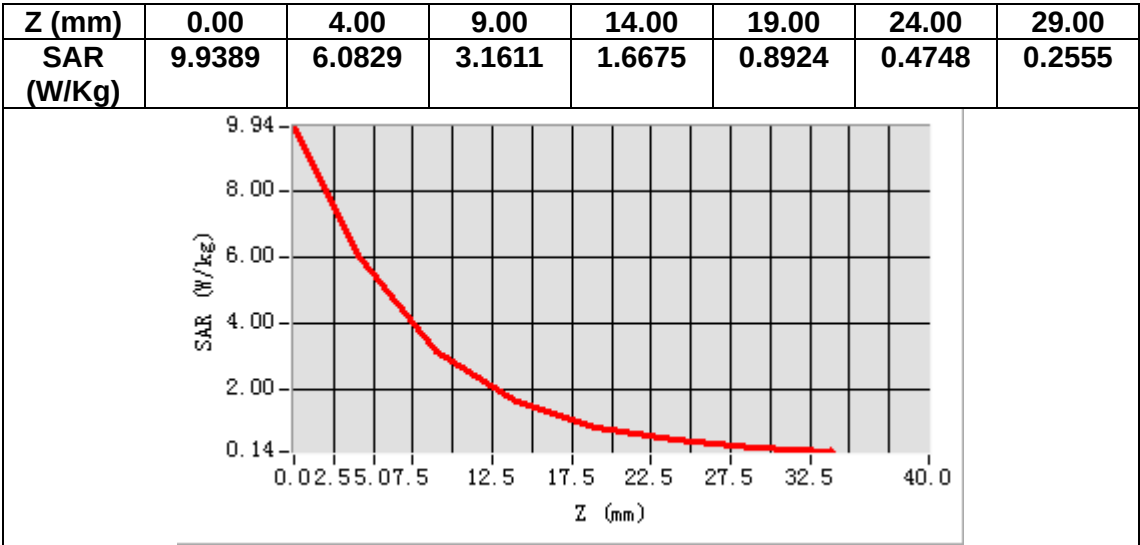

MEASUREMENT 12


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW2600</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	2600.000000
Relative permittivity (real part)	53.170143
Relative permittivity (imaginary part)	15.044940
Conductivity (S/m)	2.170111
Variation (%)	-0.100000

SURFACE SAR

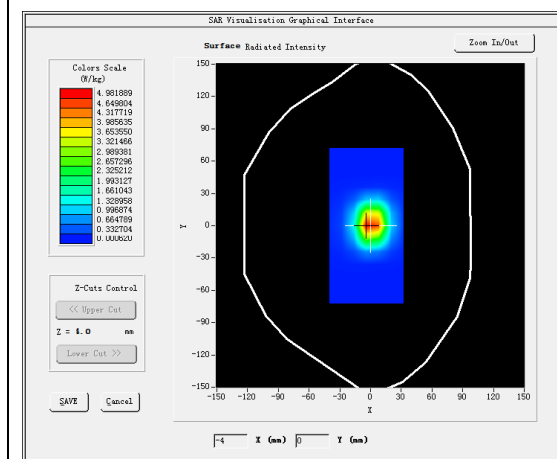

VOLUME SAR

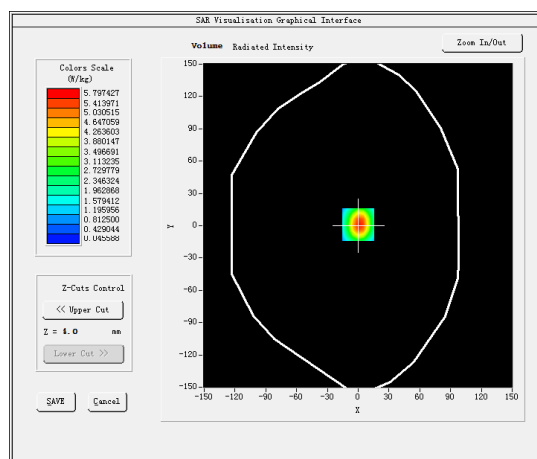

Maximum location: X=0.00, Y=1.00


SAR Peak: 9.48 W/kg

SAR 10g (W/Kg)	2.360897
SAR 1g (W/Kg)	5.350207

The graph shows the SAR distribution for the 1000 MHz antenna. The y-axis represents SAR in W/kg, ranging from 0.13 to 9.47. The x-axis represents the distance Z in mm, ranging from 0.02 to 40.0. The SAR value starts at 9.47 W/kg at Z=0.02 mm and decreases rapidly, reaching 0.13 W/kg at Z=32.5 mm.

Z (mm)	SAR (W/kg)
0.02	9.47
2.5	6.00
5.0	4.00
7.5	2.50
10.0	1.50
12.5	1.00
15.0	0.75
17.5	0.60
20.0	0.50
22.5	0.40
25.0	0.35
27.5	0.30
30.0	0.25
32.5	0.13

Hot spot position

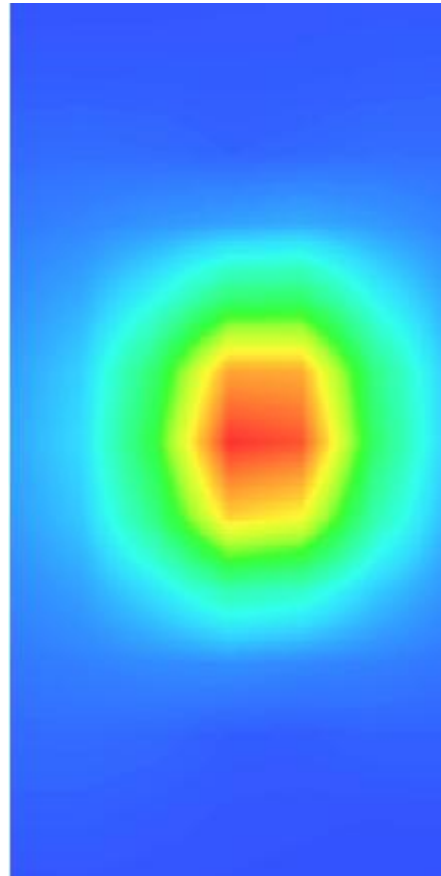

MEASUREMENT 13


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW5200</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	5200.000000
Relative permittivity (real part)	35.935237
Relative permittivity (imaginary part)	15.939619
Conductivity (S/m)	4.614271
Variation (%)	-0.080000

SURFACE SAR

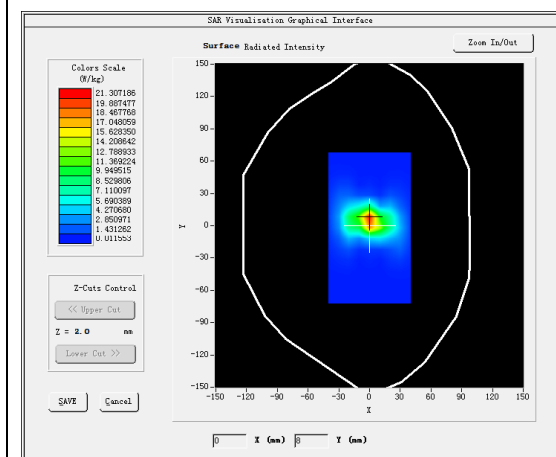



VOLUME SAR

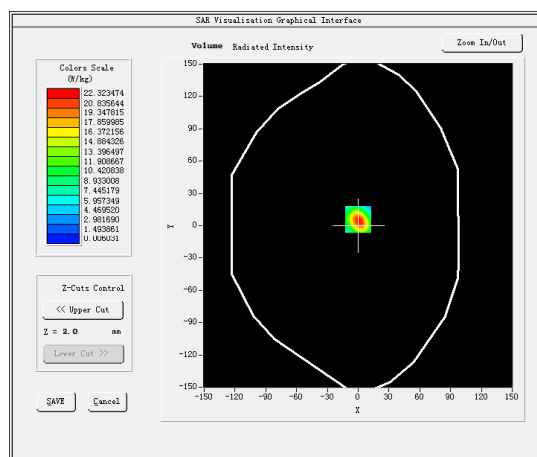

Maximum location: X=0.00, Y=6.00

SAR Peak: 40.06 W/kg

SAR 10g (W/Kg)	5.450711
SAR 1g (W/Kg)	15.454327

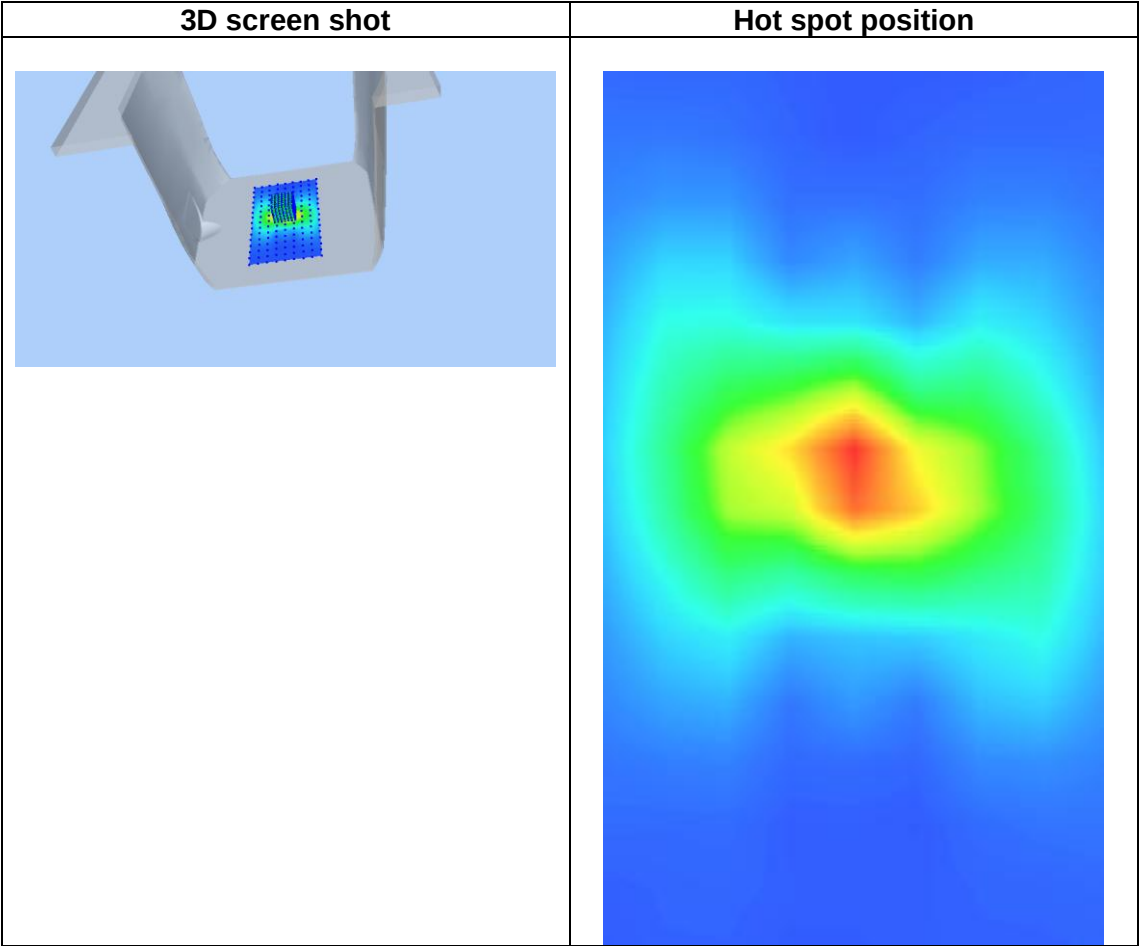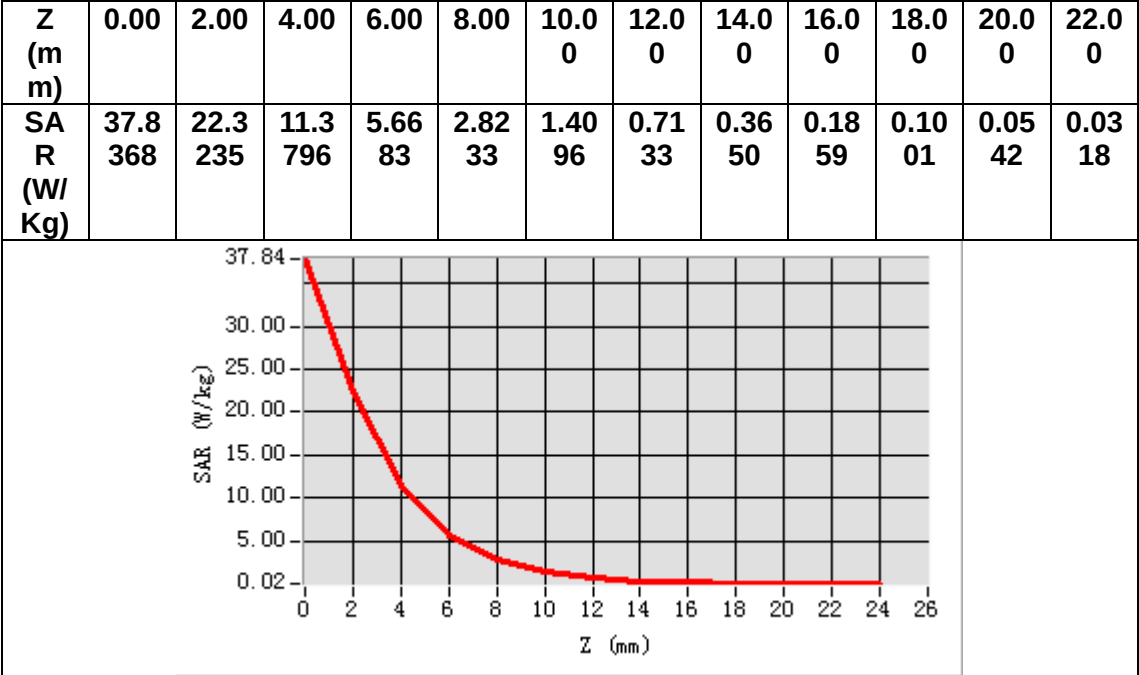

MEASUREMENT 14


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW5200</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	5200.000000
Relative permittivity (real part)	49.909537
Relative permittivity (imaginary part)	18.225509
Conductivity (S/m)	5.274271
Variation (%)	-0.450000

SURFACE SAR

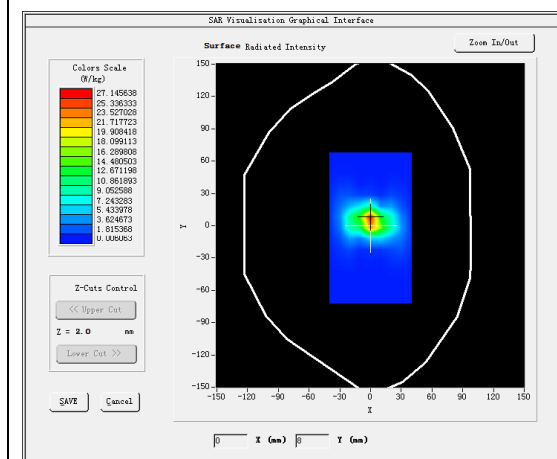

VOLUME SAR

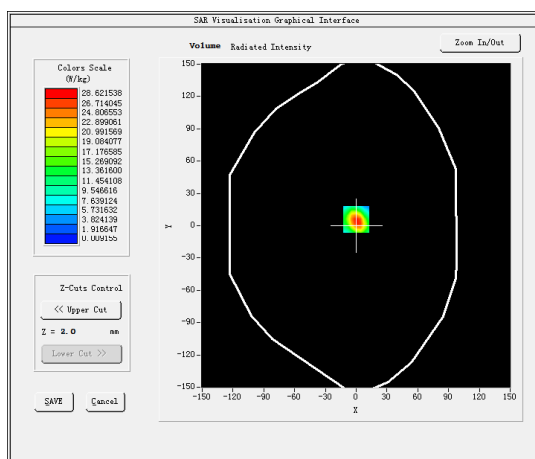


Maximum location: X=0.00, Y=6.00

SAR Peak: 51.30 W/kg

SAR 10g (W/Kg)	5.512744
SAR 1g (W/Kg)	14.911757

Z (mm)	SAR (W/kg)
0	48.3
2	28.0
4	14.0
6	7.0
8	3.5
10	1.5
12	0.5
14	0.2
16	0.1
18	0.05
20	0.02
22	0.01
24	0.005
26	0.002

Hot spot position

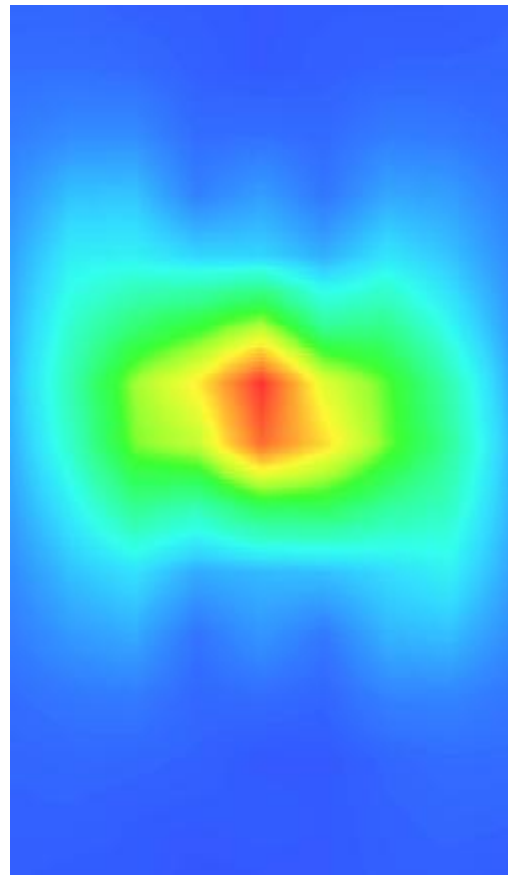

MEASUREMENT 15


A. Experimental conditions.

Area Scan	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
ZoomScan	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Dipole</u>
Band	<u>CW5400</u>
Channels	<u>Middle</u>
Signal	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	5400.000000
Relative permittivity (real part)	35.548450
Relative permittivity (imaginary part)	16.355500
Conductivity (S/m)	4.914271
Variation (%)	-0.590000

SURFACE SAR

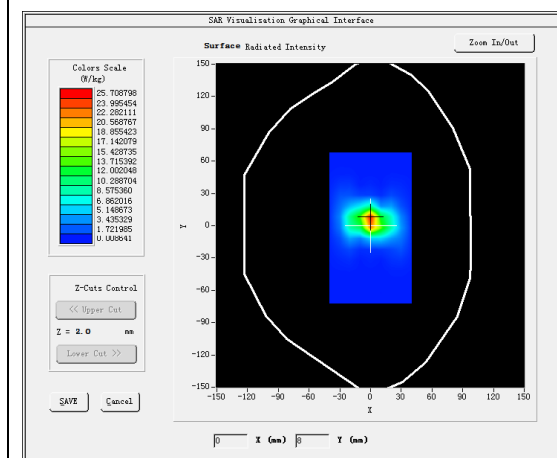



VOLUME SAR

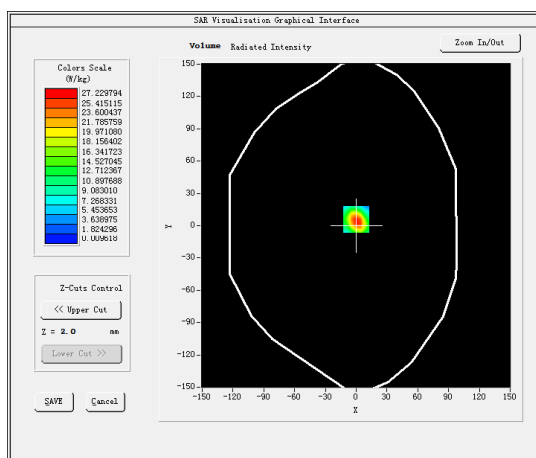

Maximum location: X=0.00, Y=6.00

SAR Peak: 48.83 W/kg

SAR 10g (W/Kg)	5.851265
SAR 1g (W/Kg)	16.453777

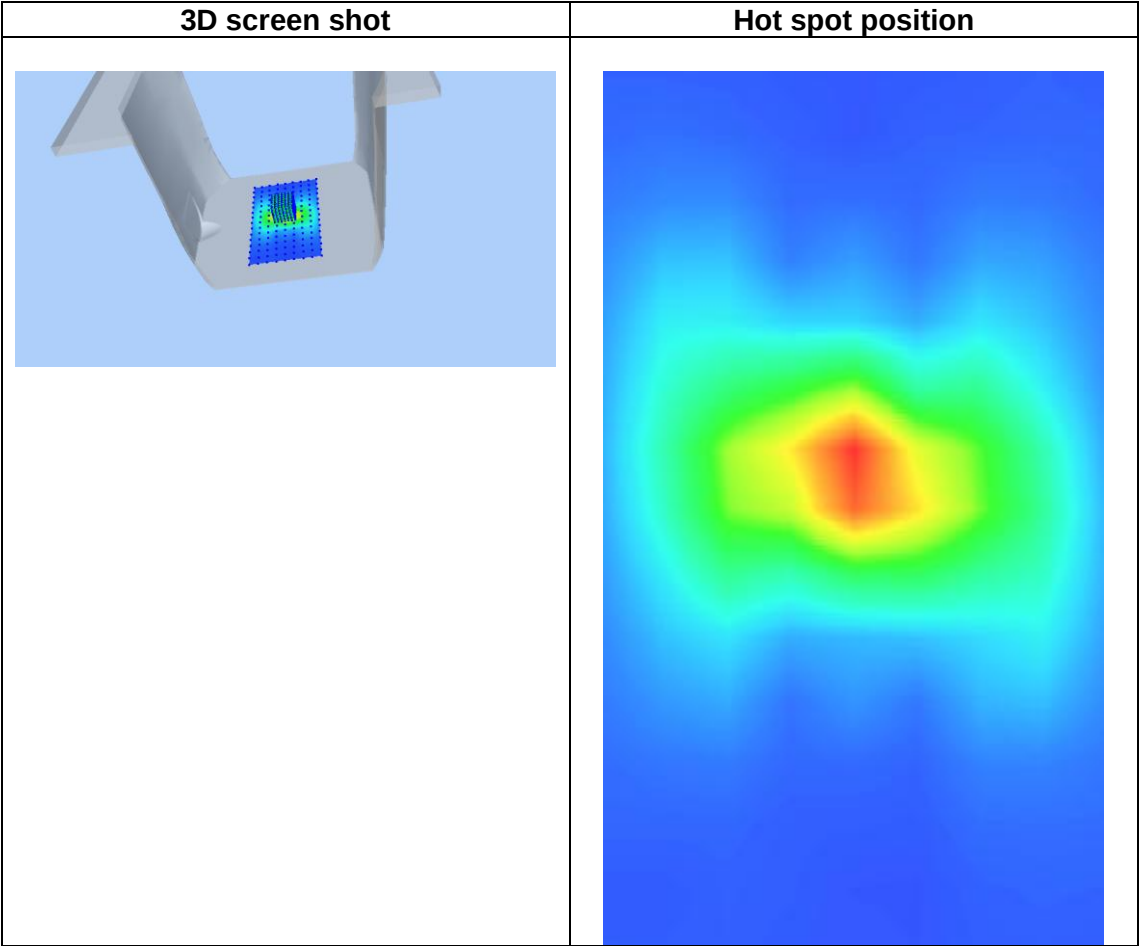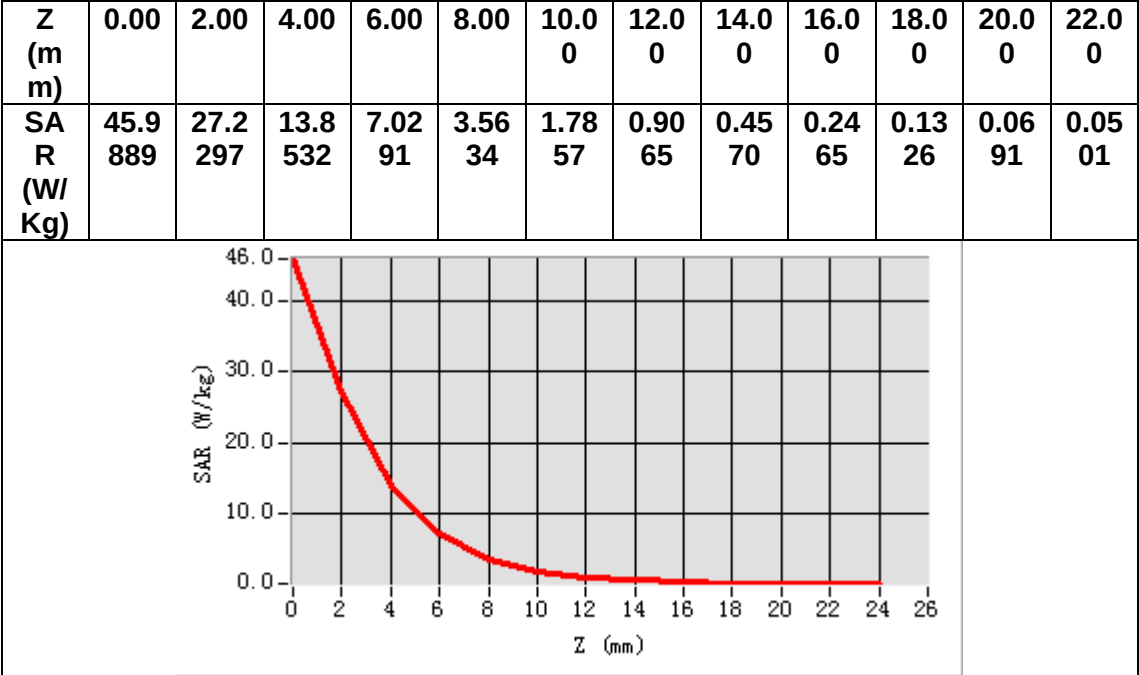

MEASUREMENT 16


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW5400</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	5400.000000
Relative permittivity (real part)	49.584006
Relative permittivity (imaginary part)	18.296390
Conductivity (S/m)	5.494270
Variation (%)	-0.070000

SURFACE SAR

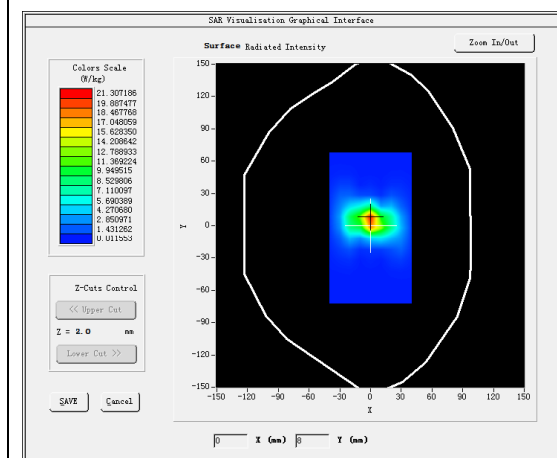

VOLUME SAR

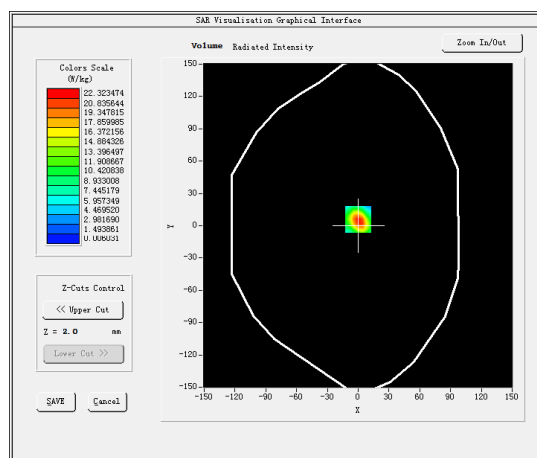


Maximum location: X=0.00, Y=6.00


SAR Peak: 40.06 W/kg

SAR 10g (W/Kg)	5.812868
SAR 1g (W/Kg)	16.912320


Z (m m)	0.00	2.00	4.00	6.00	8.00	10.0 0	12.0 0	14.0 0	16.0 0	18.0 0	20.0 0	22.0 0
SA R (W/ Kg)	37.8 359	22.3 235	11.3 794	5.66 83	2.82 31	1.40 96	0.71 33	0.36 50	0.18 59	0.10 11	0.05 42	0.03 17

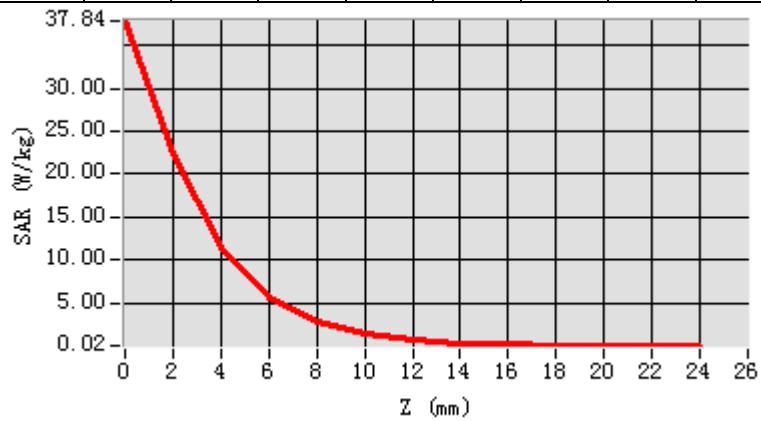

3D screen shot

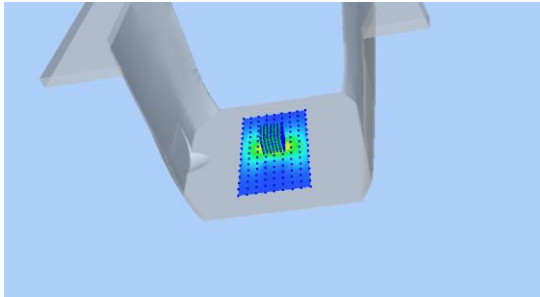

Hot spot position

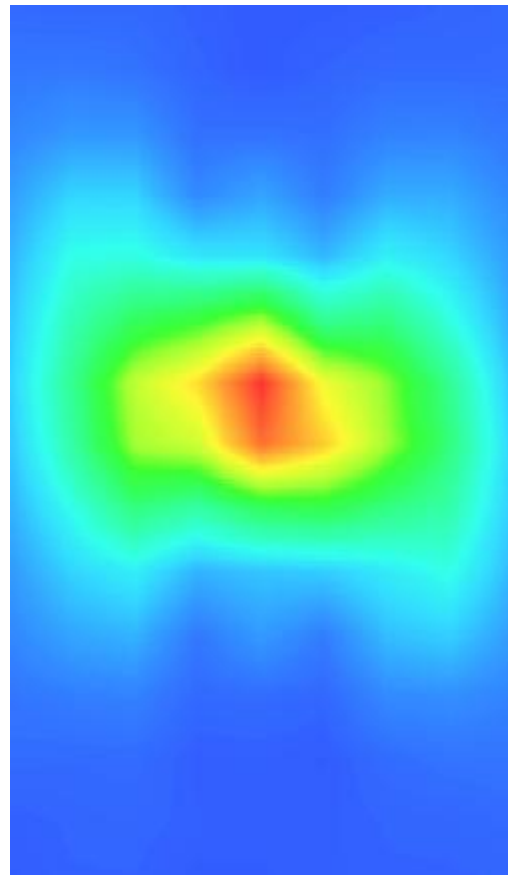

MEASUREMENT 17


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW5600</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	5600.000000
Relative permittivity (real part)	35.681981
Relative permittivity (imaginary part)	16.279619
Conductivity (S/m)	5.064271
Variation (%)	-0.390000

SURFACE SAR

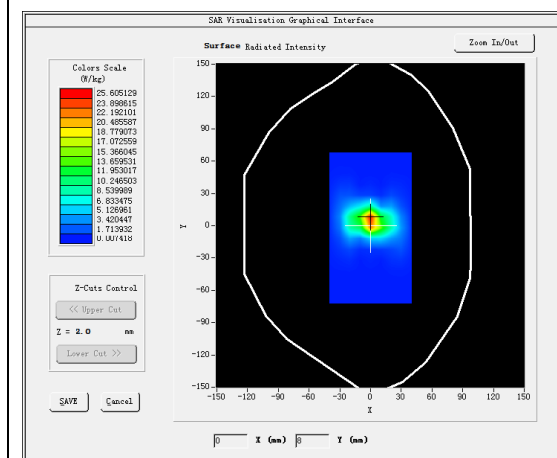



VOLUME SAR

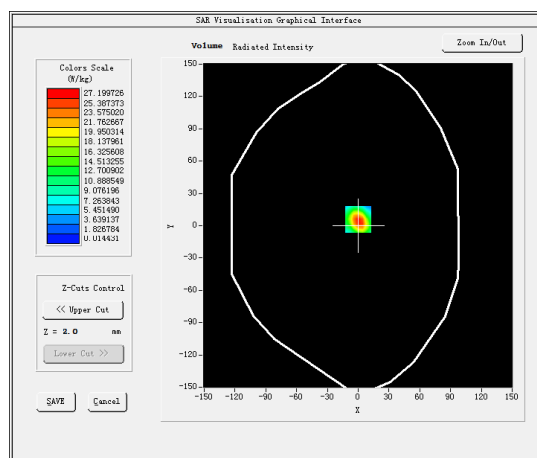

Maximum location: X=0.00, Y=6.00

SAR Peak: 48.80 W/kg

SAR 10g (W/Kg)	5.944386
SAR 1g (W/Kg)	16.910446

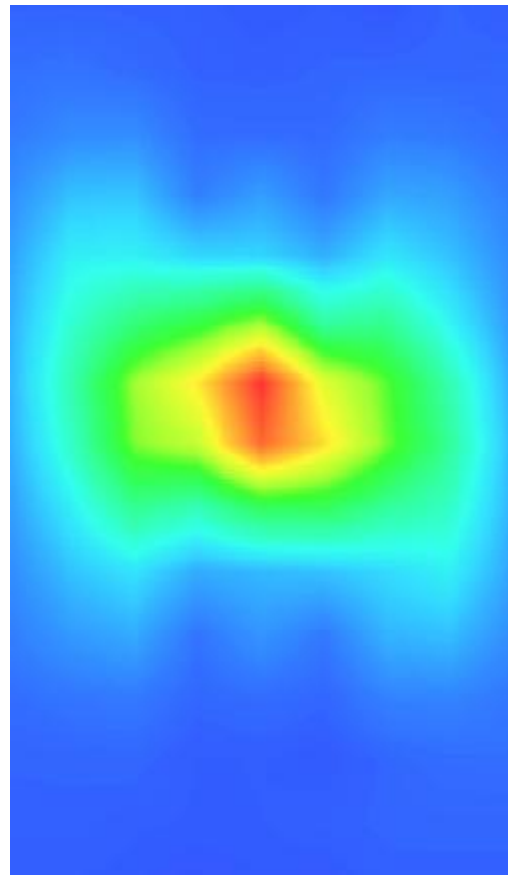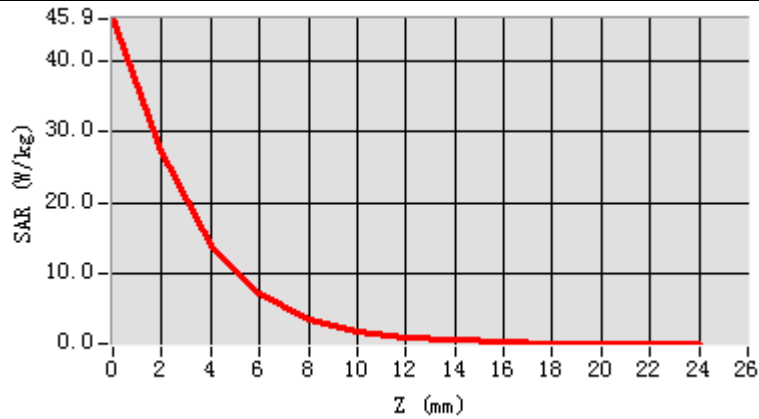


MEASUREMENT 18

A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW5600</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>

B. SAR Measurement Results



Frequency (MHz)	5600.000000
Relative permittivity (real part)	49.909537
Relative permittivity (imaginary part)	18.225509
Conductivity (S/m)	5.674270
Variation (%)	-0.040000

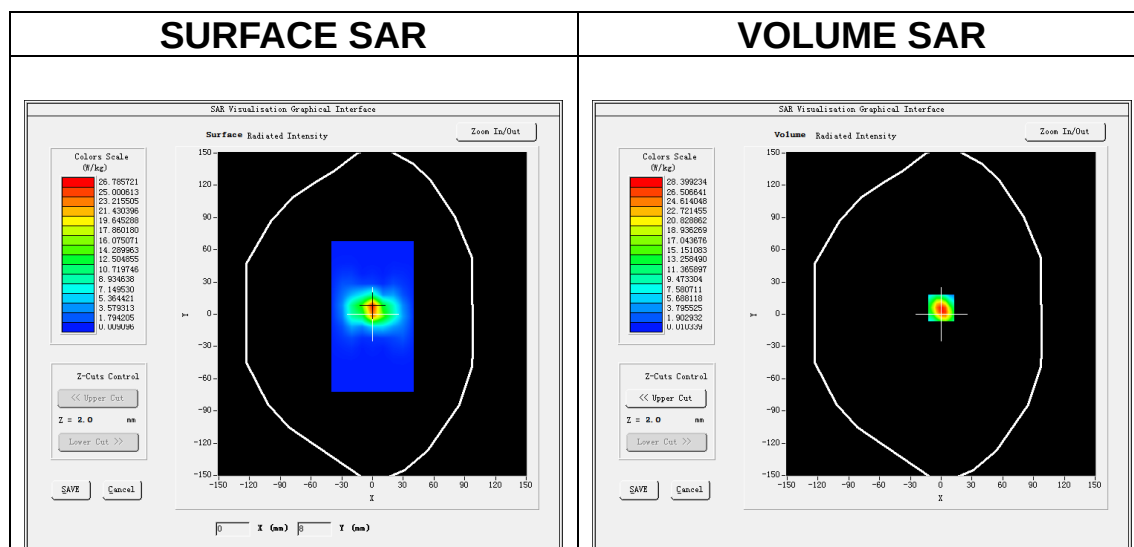

Maximum location: X=0.00, Y=6.00

SAR Peak: 50.97 W/kg

SAR 10g (W/Kg)	5.782329
SAR 1g (W/Kg)	16.656125

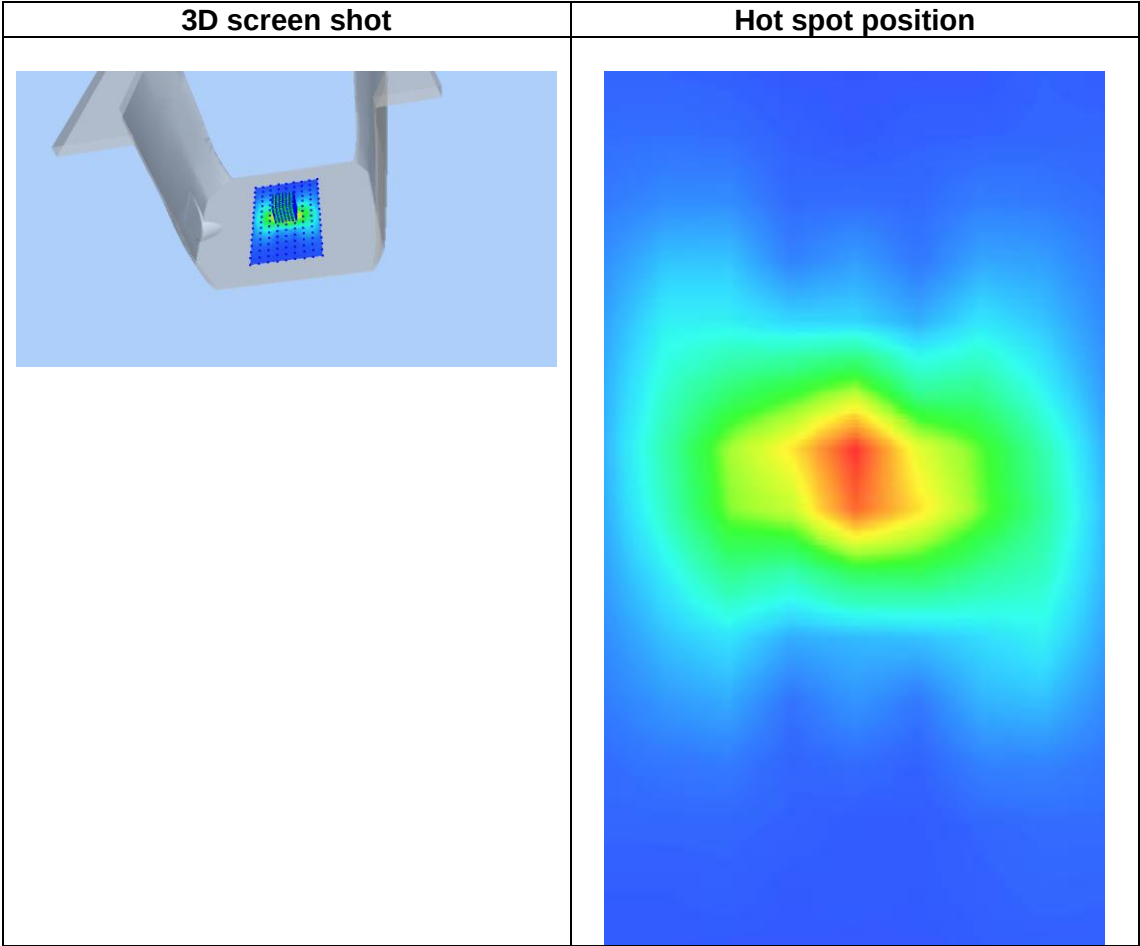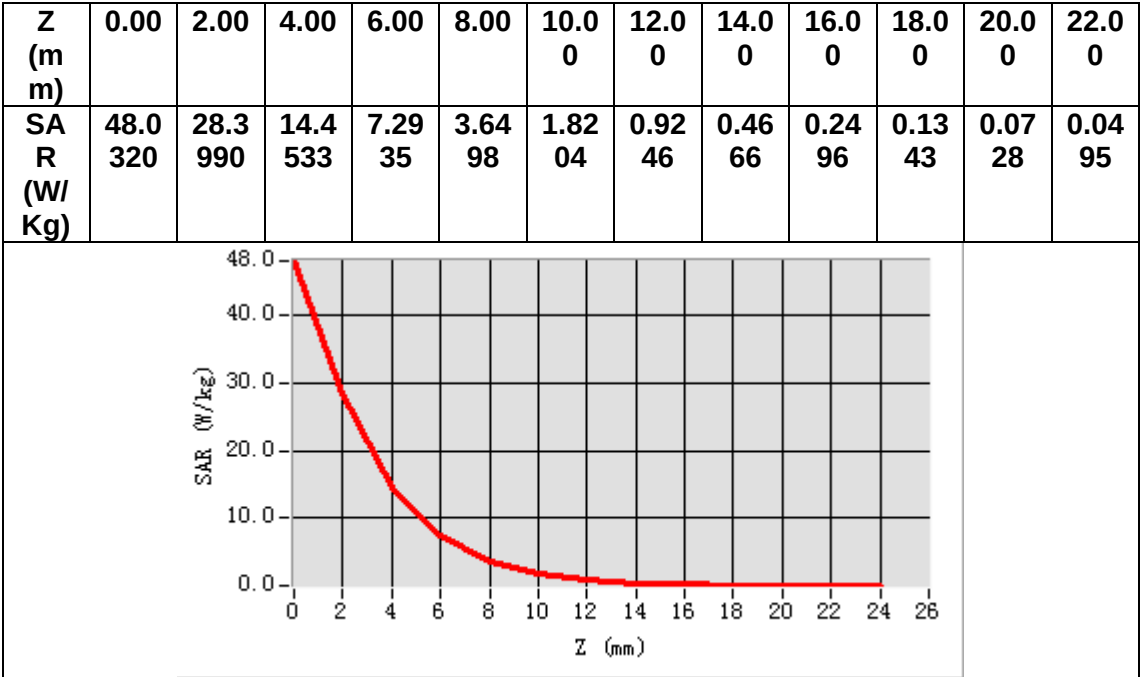

MEASUREMENT 19


A. Experimental conditions.

Area Scan	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
ZoomScan	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Dipole</u>
Band	<u>CW5800</u>
Channels	<u>Middle</u>
Signal	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	5800.000000
Relative permittivity (real part)	34.788837
Relative permittivity (imaginary part)	15.999709
Conductivity (S/m)	5.164271
Variation (%)	-0.390000

SURFACE SAR

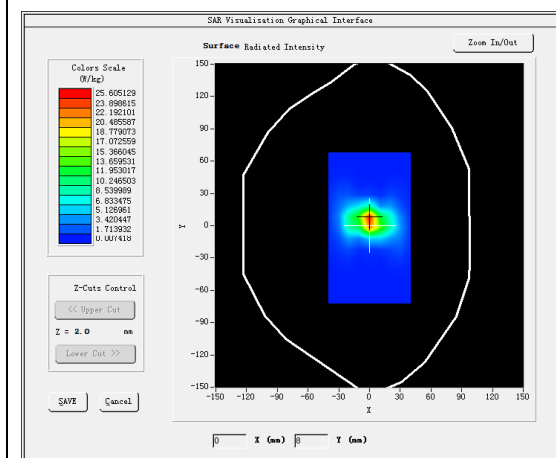



VOLUME SAR

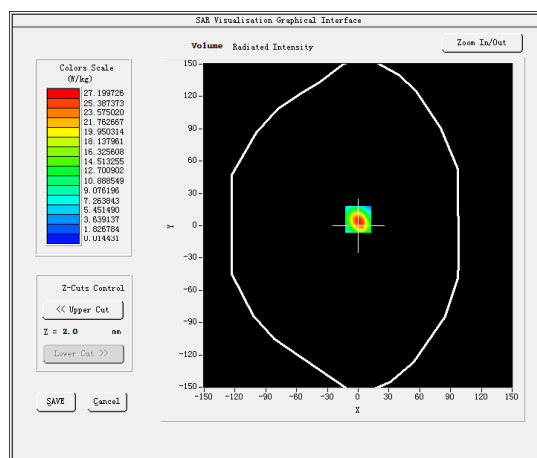

Maximum location: X=0.00, Y=6.00

SAR Peak: 48.80 W/kg

SAR 10g (W/Kg)	5.944387
SAR 1g (W/Kg)	17.921446

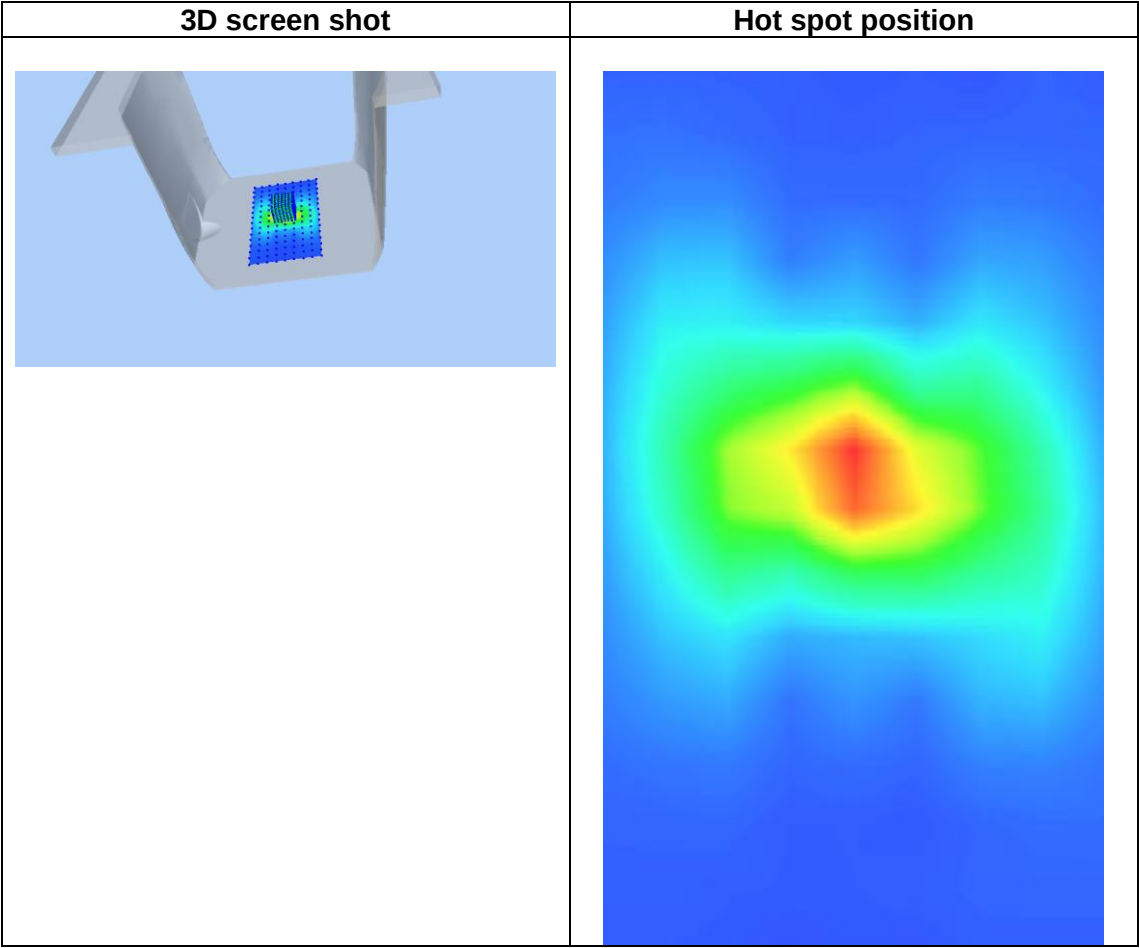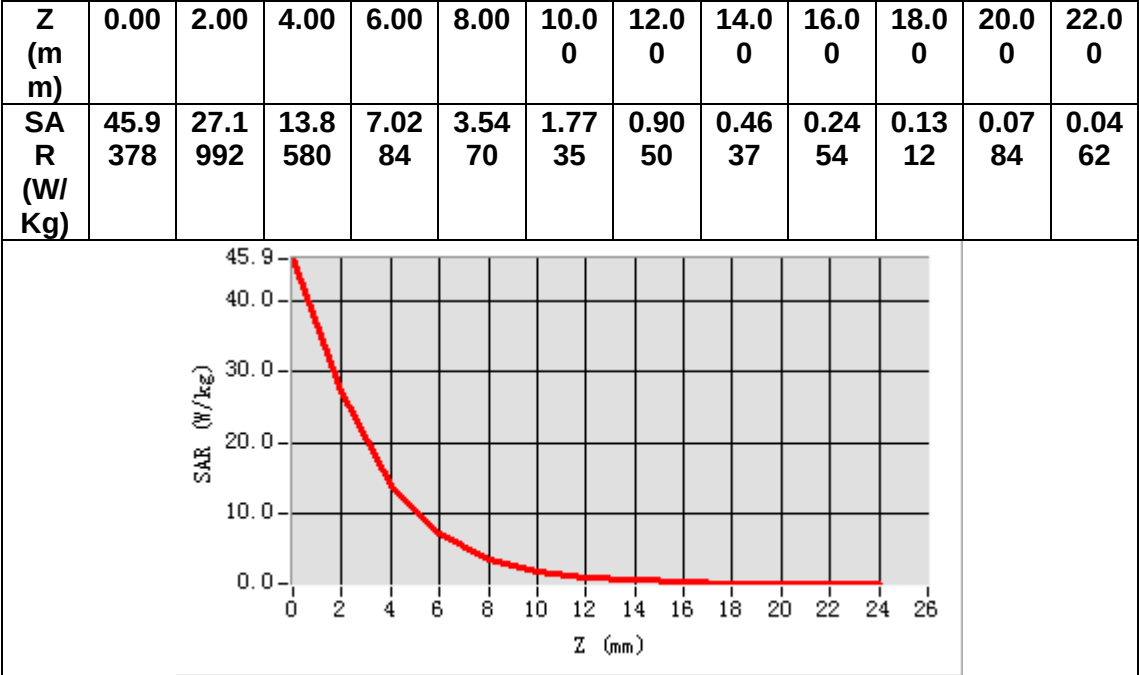

MEASUREMENT 20


A. Experimental conditions.

Area Scan	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
ZoomScan	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Dipole</u>
Band	<u>CW5800</u>
Channels	<u>Middle</u>
Signal	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	5800.000000
Relative permittivity (real part)	48.592751
Relative permittivity (imaginary part)	18.721209
Conductivity (S/m)	6.034251
Variation (%)	-0.590000

SURFACE SAR

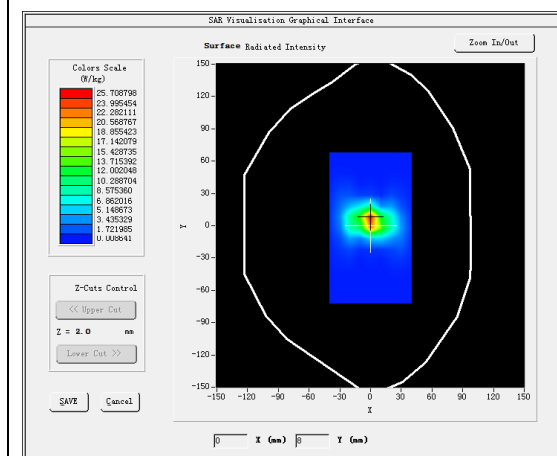



VOLUME SAR

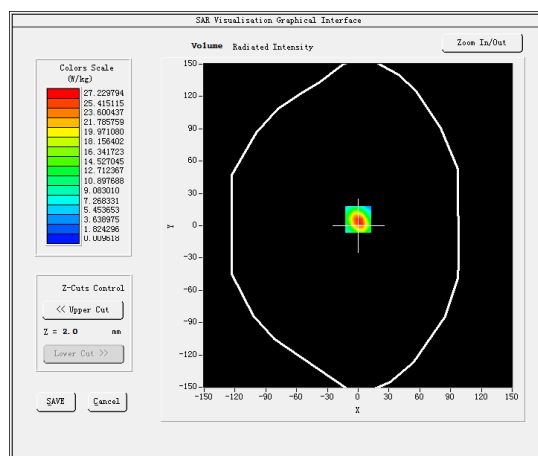

Maximum location: X=0.00, Y=6.00

SAR Peak: 48.83 W/kg

SAR 10g (W/Kg)	5.517260
SAR 1g (W/Kg)	15.913721

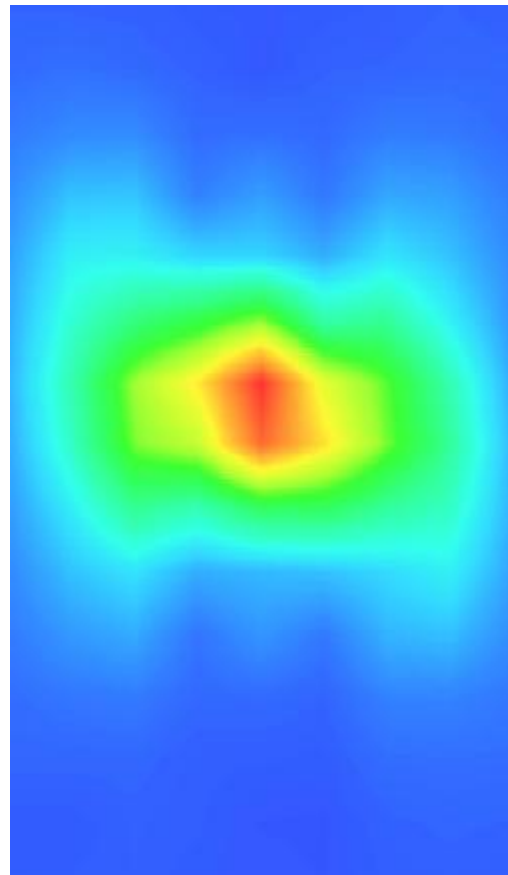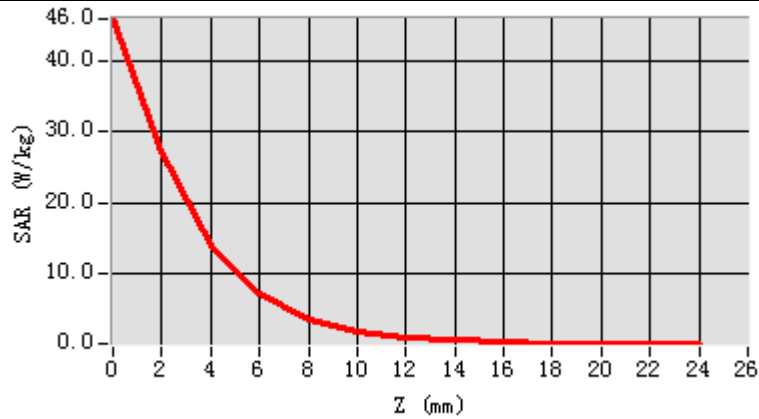

MEASUREMENT 21


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Dipole</u>
<u>Band</u>	<u>CW1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1900.000000
Relative permittivity (real part)	38.641287
Relative permittivity (imaginary part)	13.613008
Conductivity (S/m)	1.440336
Variation (%)	-1.430000

SURFACE SAR

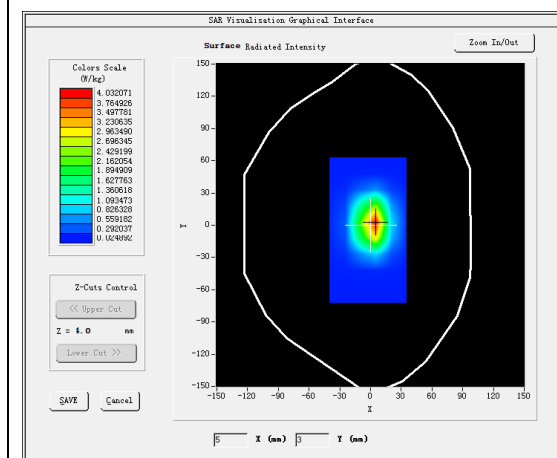



VOLUME SAR

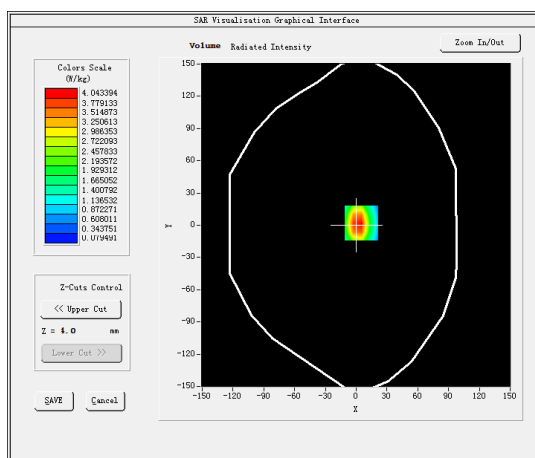

Maximum location: X=5.00, Y=2.00

SAR Peak: 6.70 W/kg

SAR 10g (W/Kg)	1.909456
SAR 1g (W/Kg)	3.826365

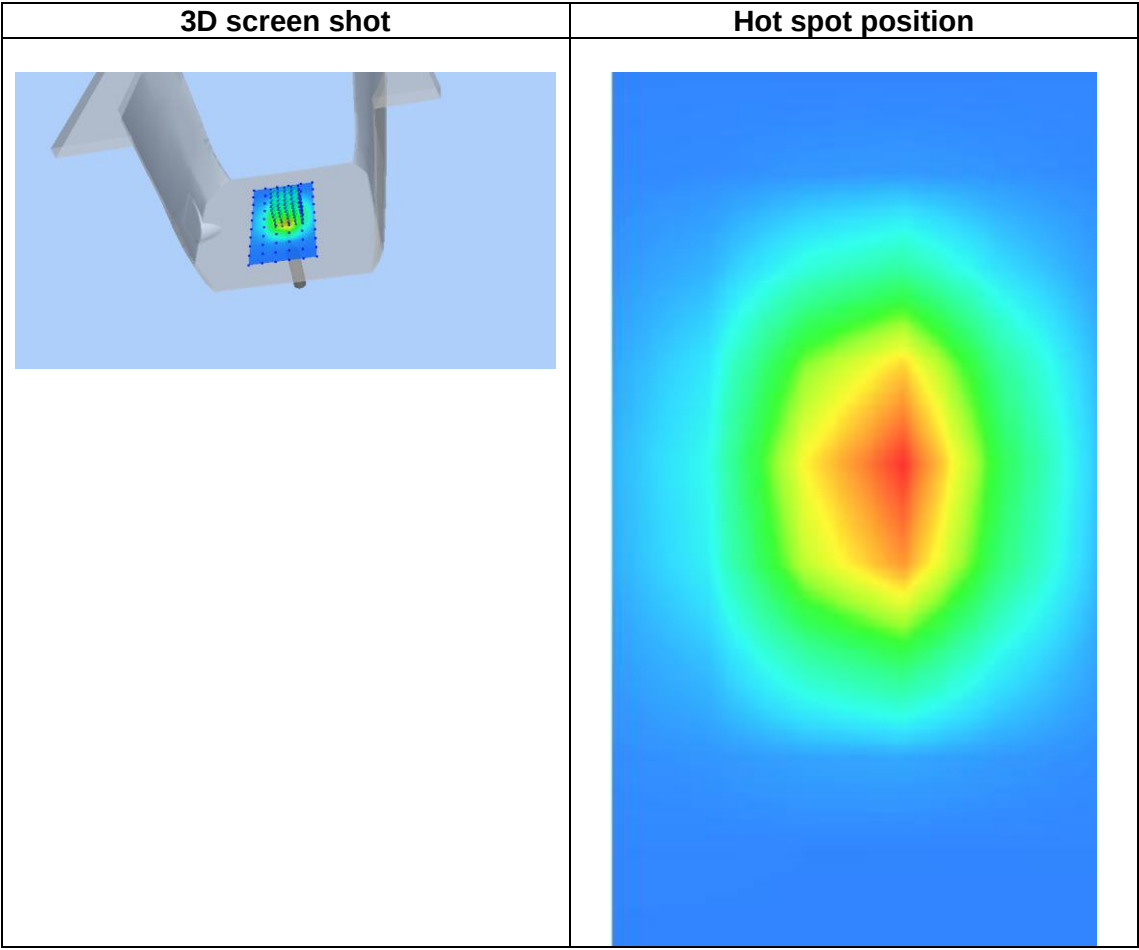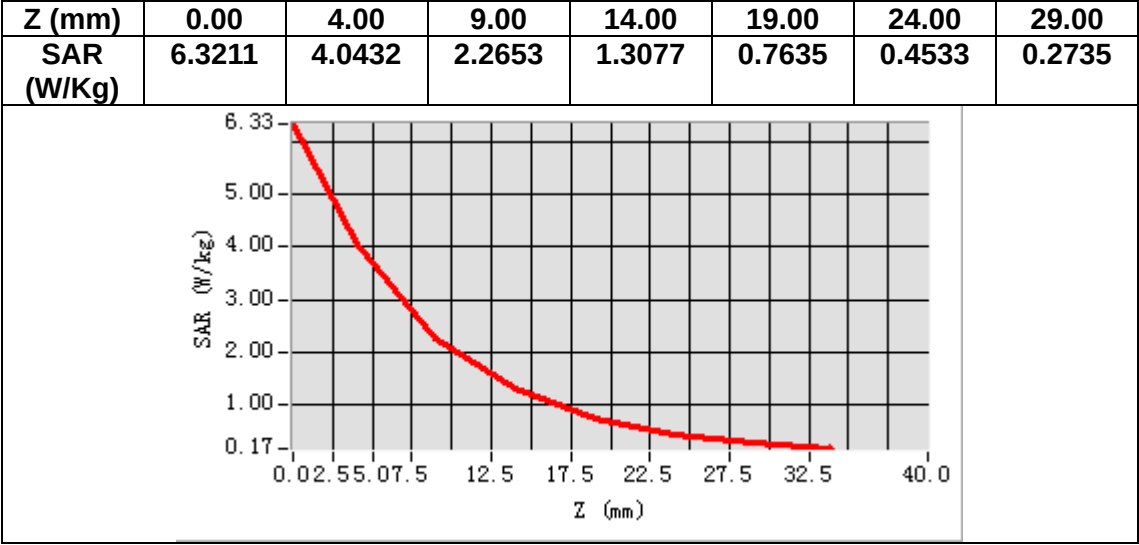

MEASUREMENT 22


A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Dipole</u>
Band	<u>CW1900</u>
Channels	<u>Middle</u>
Signal	<u>CW (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1900.000000
Relative permittivity (real part)	54.253335
Relative permittivity (imaginary part)	14.493503
Conductivity (S/m)	1.533566
Variation (%)	0.120000

SURFACE SAR

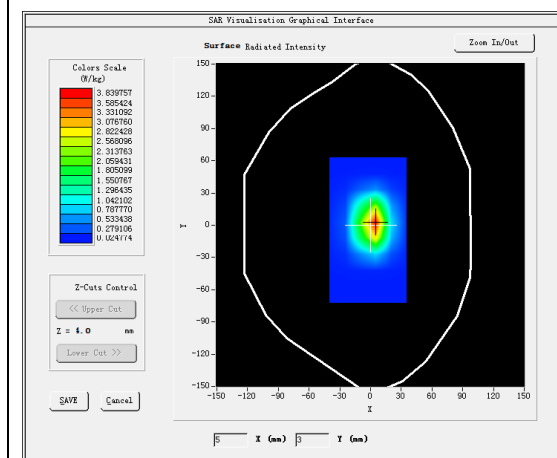



VOLUME SAR

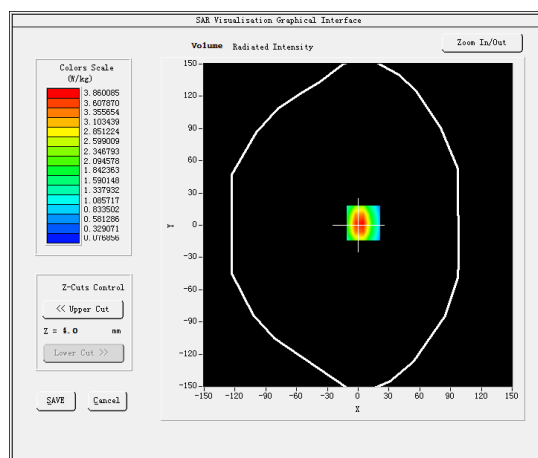

Maximum location: X=5.00, Y=2.00

SAR Peak: 6.39 W/kg

SAR 10g (W/Kg)	2.104329
SAR 1g (W/Kg)	3.720402

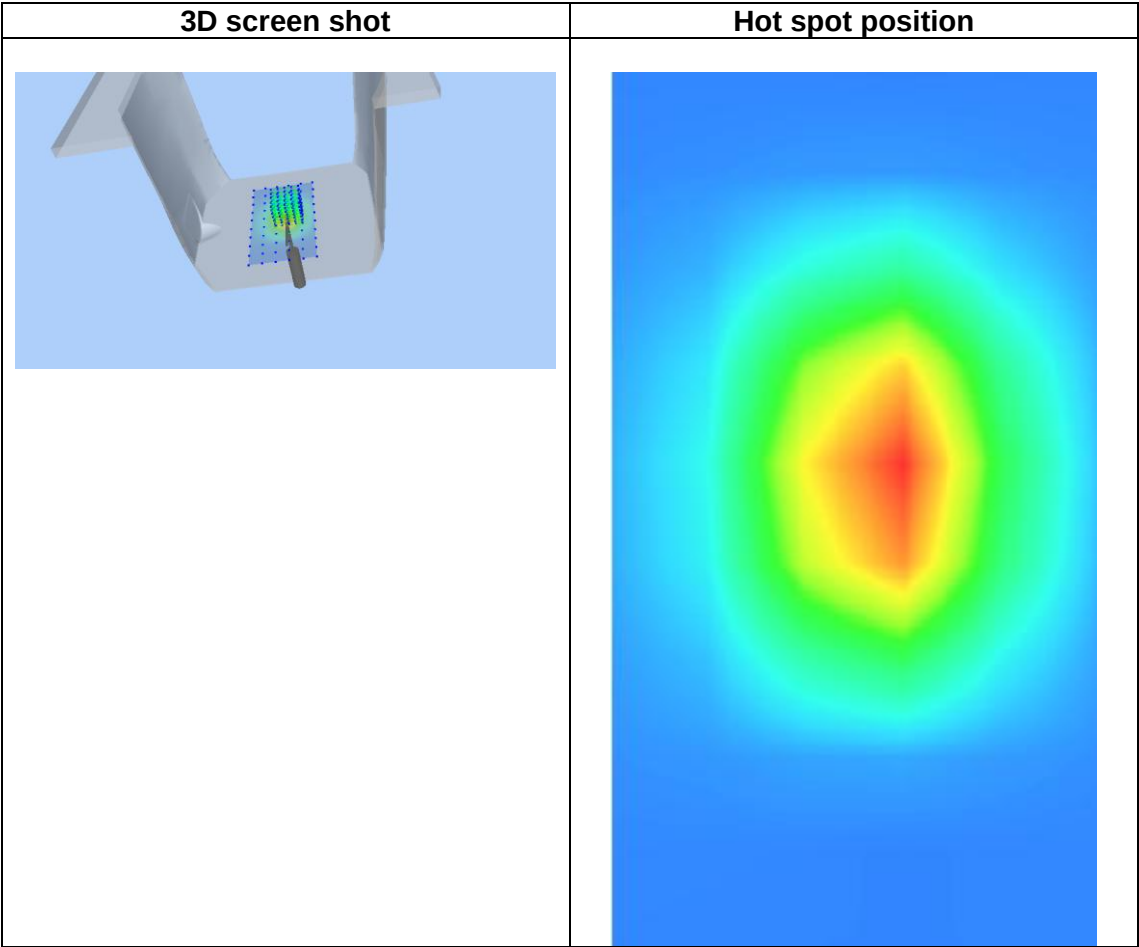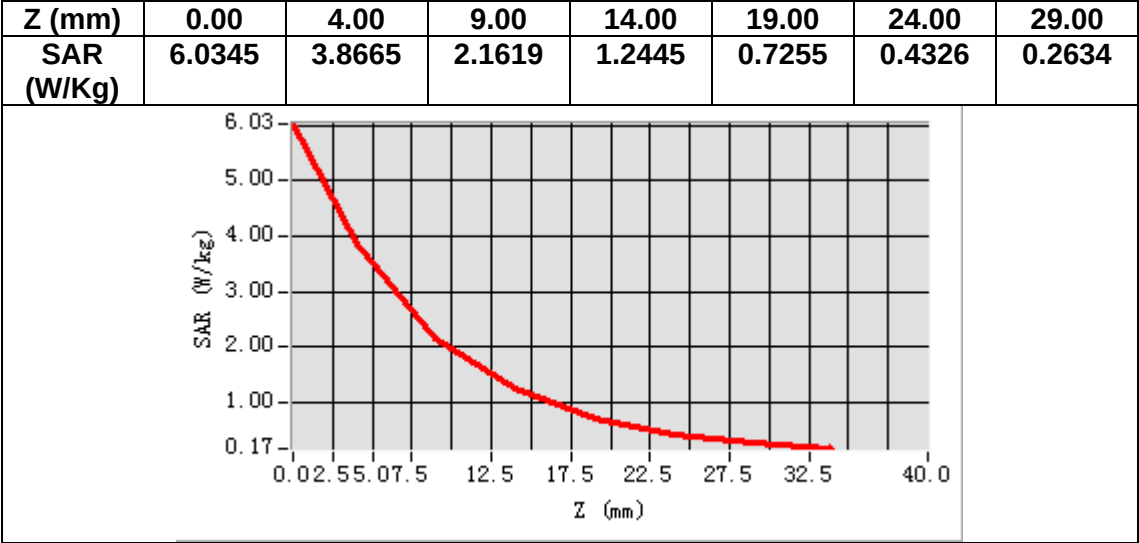

13. Appendix C. Plots of High SAR Measurement

Table of contents
MEASUREMENT 1 WCDMA Band IV Head
MEASUREMENT 2 WCDMA Band IV Body
MEASUREMENT 3 WCDMA Band V Head
MEASUREMENT 4 WCDMA Band V Body
MEASUREMENT 5 WLAN 2.4G Head
MEASUREMENT 6 WLAN 2.4G Body
MEASUREMENT 7 LTE Band IV Head
MEASUREMENT 8 LTE Band IV Body
MEASUREMENT 9 LTE Band V Head
MEASUREMENT 10 LTE Band V Body
MEASUREMENT 11 LTE Band VII Head
MEASUREMENT 12 LTE Band VII Body
MEASUREMENT 13 GSM 850 Head
MEASUREMENT 14 GSM 850 Body
MEASUREMENT 15 GSM 1900 Head
MEASUREMENT 16 GSM 1900 Body
MEASUREMENT 17 LTE Band XXXVIII Head
MEASUREMENT 18 LTE Band XXXVIII Body
MEASUREMENT 19 LTE Band XL A Head
MEASUREMENT 20 LTE Band XL A Body
MEASUREMENT 21 LTE Band XL B Head
MEASUREMENT 22 LTE Band XL B Body
MEASUREMENT 23 LTE Band XLI Head
MEASUREMENT 24 LTE Band XLI Body
MEASUREMENT 25 WLAN 5.2G Head
MEASUREMENT 26 WLAN 5.3G Head
MEASUREMENT 27 WLAN 5.6G Head
MEASUREMENT 28 WLAN 5.8G Head
MEASUREMENT 29 WLAN 5.2G Body
MEASUREMENT 30 WLAN 5.3G Body
MEASUREMENT 31 WLAN 5.6G Body
MEASUREMENT 32 WLAN 5.8G Body
MEASUREMENT 33 LTE Band II Head
MEASUREMENT 34 LTE Band II Body
MEASUREMENT 35 LTE Band II Head
MEASUREMENT 36 LTE Band II Body

MEASUREMENT 1


A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Left head</u>
Device Position	<u>Cheek</u>
Band	<u>Band4 WCDMA1700</u>
Channels	<u>Middle</u>
Signal	<u>WCDMA (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1732.600000
Relative permittivity (real part)	40.039291
Relative permittivity (imaginary part)	13.974592
Conductivity (S/m)	1.345054
Variation (%)	0.960000

SURFACE SAR

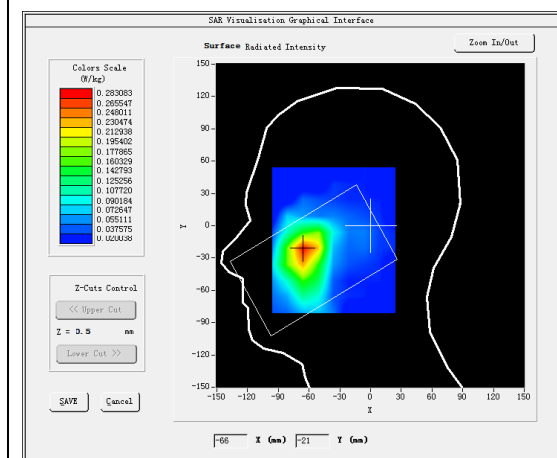



VOLUME SAR

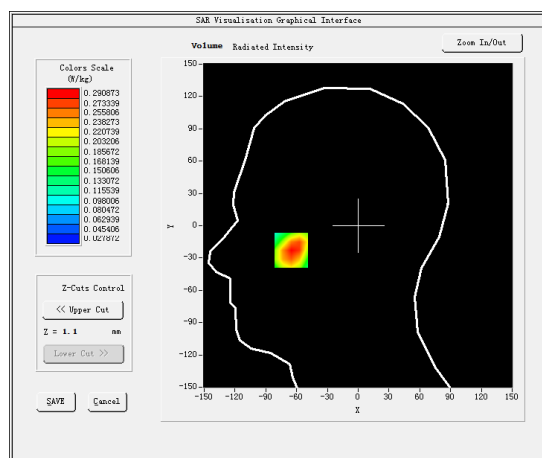

Maximum location: X=-65.00, Y=-23.00

SAR Peak: 0.40 W/kg

SAR 10g (W/Kg)	0.179180
SAR 1g (W/Kg)	0.279169

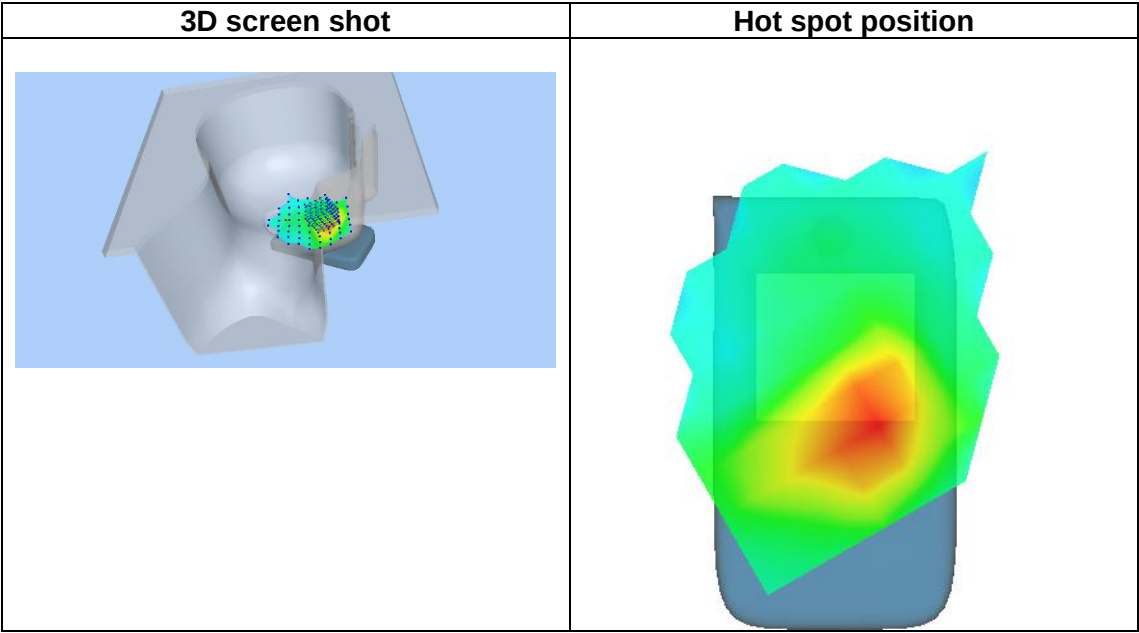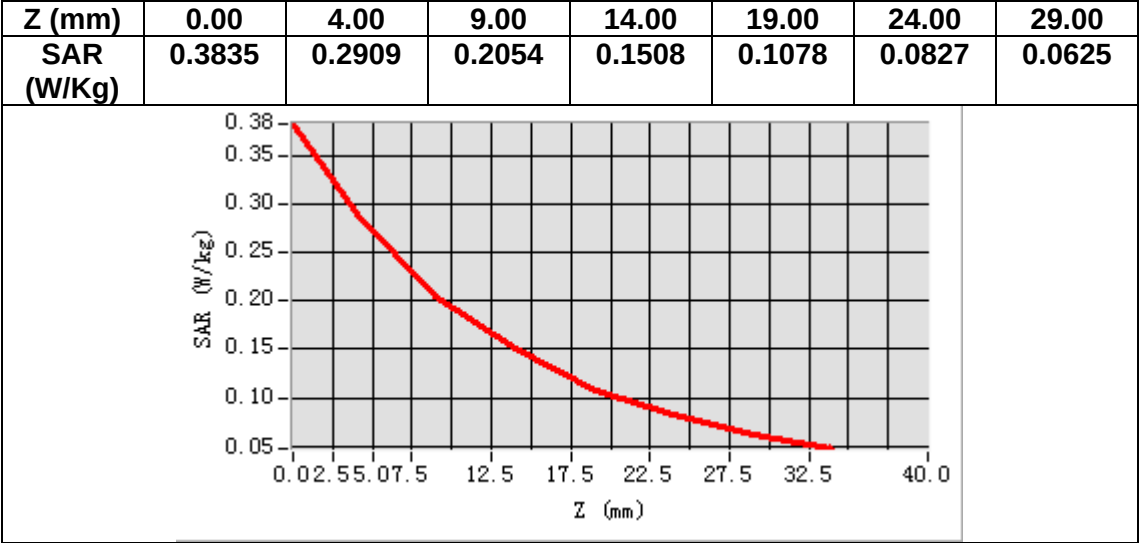

MEASUREMENT 2


A. Experimental conditions.

Area Scan	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
ZoomScan	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>Band4 WCDMA1700</u>
Channels	<u>Middle</u>
Signal	<u>WCDMA (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1732.600000
Relative permittivity (real part)	54.069366
Relative permittivity (imaginary part)	15.358220
Conductivity (S/m)	1.478229
Variation (%)	-1.000000

SURFACE SAR

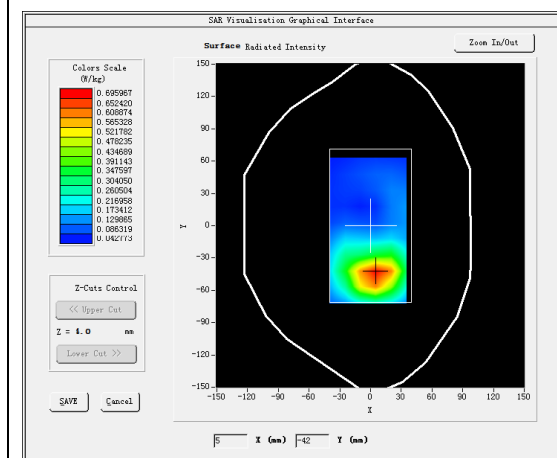



VOLUME SAR

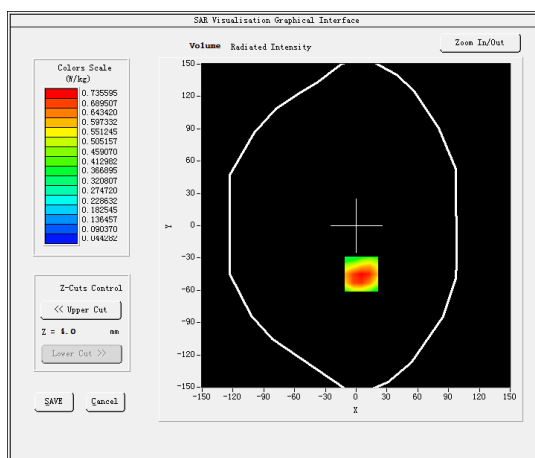

Maximum location: X=5.00, Y=-45.00

SAR Peak: 1.07 W/kg

SAR 10g (W/Kg)	0.432031
SAR 1g (W/Kg)	0.714114

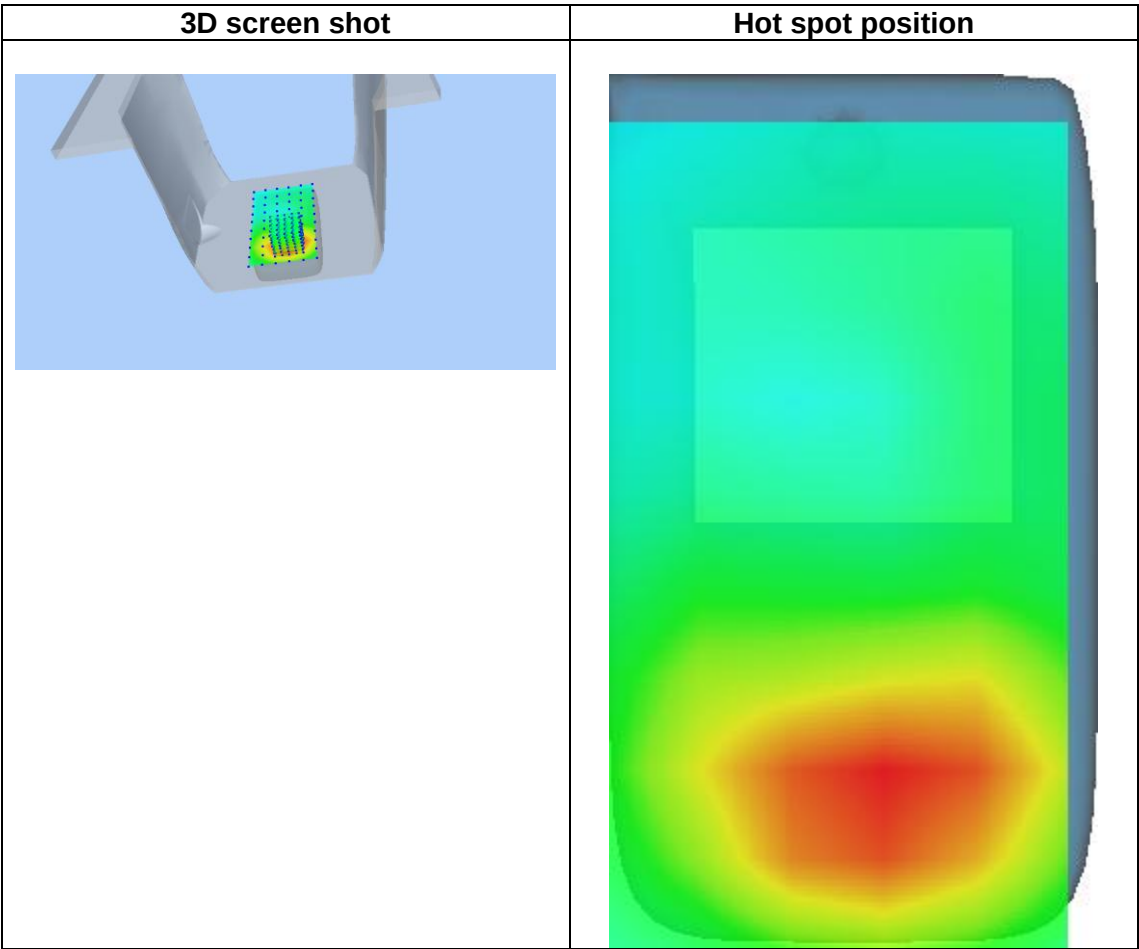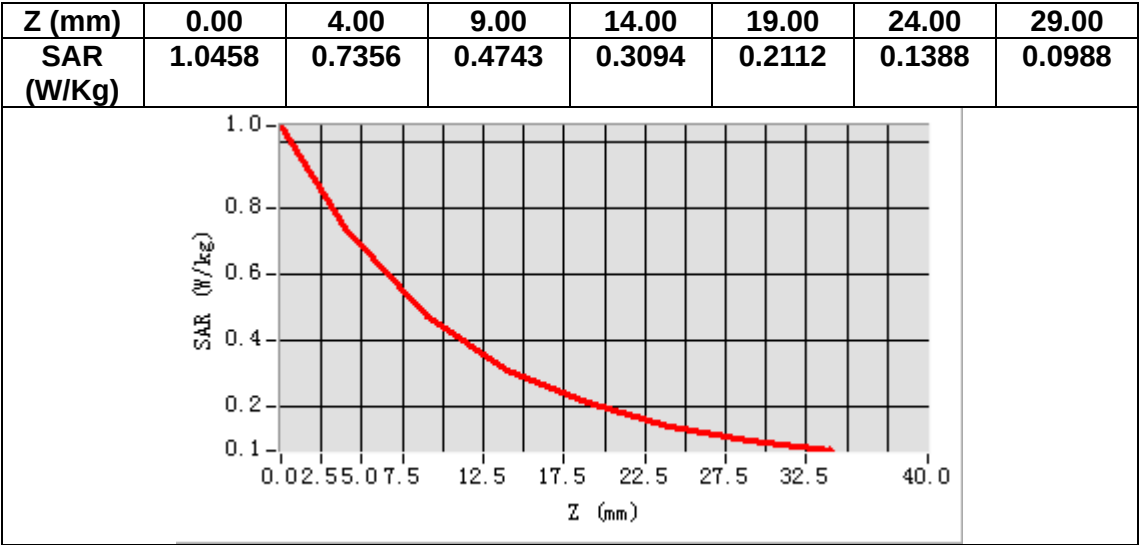

MEASUREMENT 3


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>Band5 WCDMA850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	41.594166
Relative permittivity (imaginary part)	19.687820
Conductivity (S/m)	0.914827
Variation (%)	0.830000

SURFACE SAR

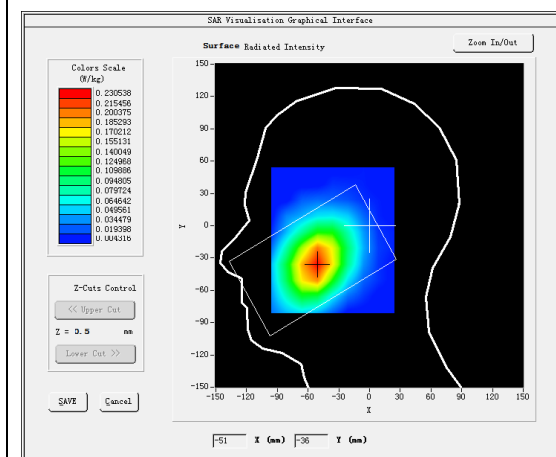




VOLUME SAR

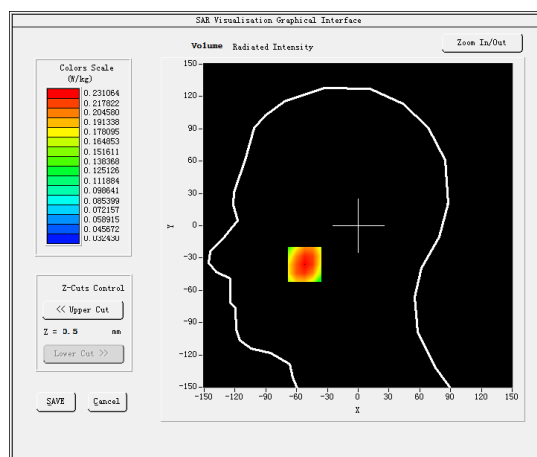

Maximum location: X=-52.00, Y=-36.00

SAR Peak: 0.27 W/kg

SAR 10g (W/Kg)	0.171076
SAR 1g (W/Kg)	0.224378

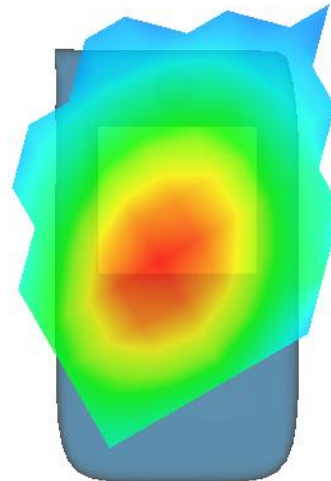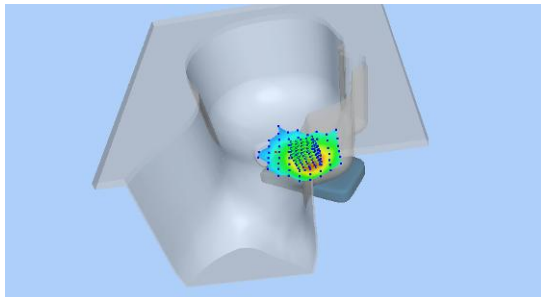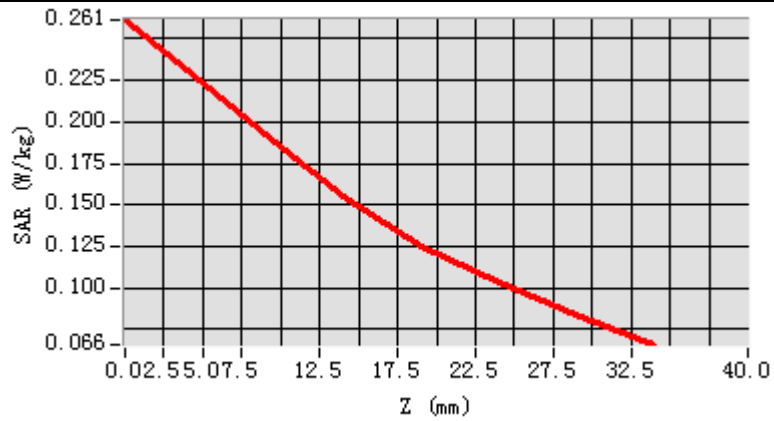

MEASUREMENT 4


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>Band5 WCDMA850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>WCDMA (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	54.811581
Relative permittivity (imaginary part)	21.004740
Conductivity (S/m)	0.976020
Variation (%)	2.860000

SURFACE SAR

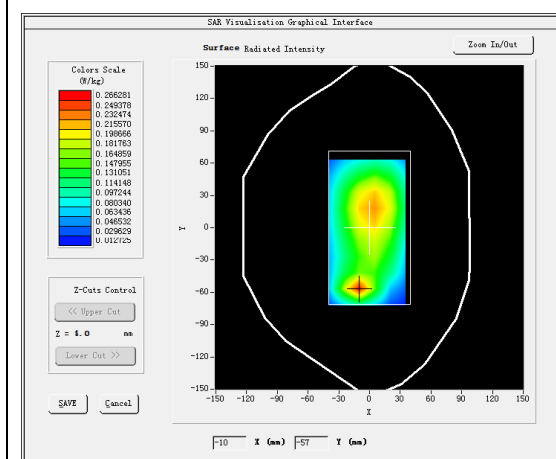



VOLUME SAR

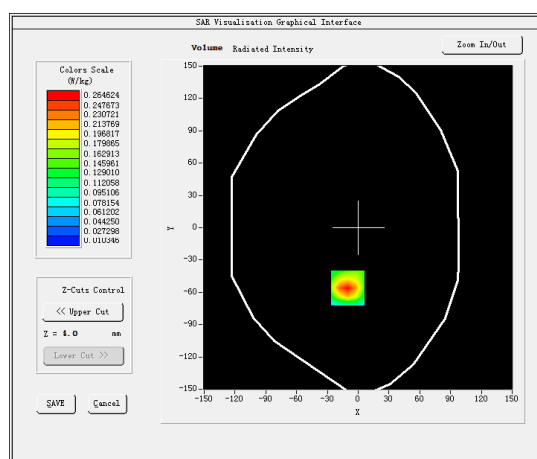

Maximum location: X=-10.00, Y=-56.00

SAR Peak: 0.38 W/kg

SAR 10g (W/Kg)	0.140632
SAR 1g (W/Kg)	0.247913

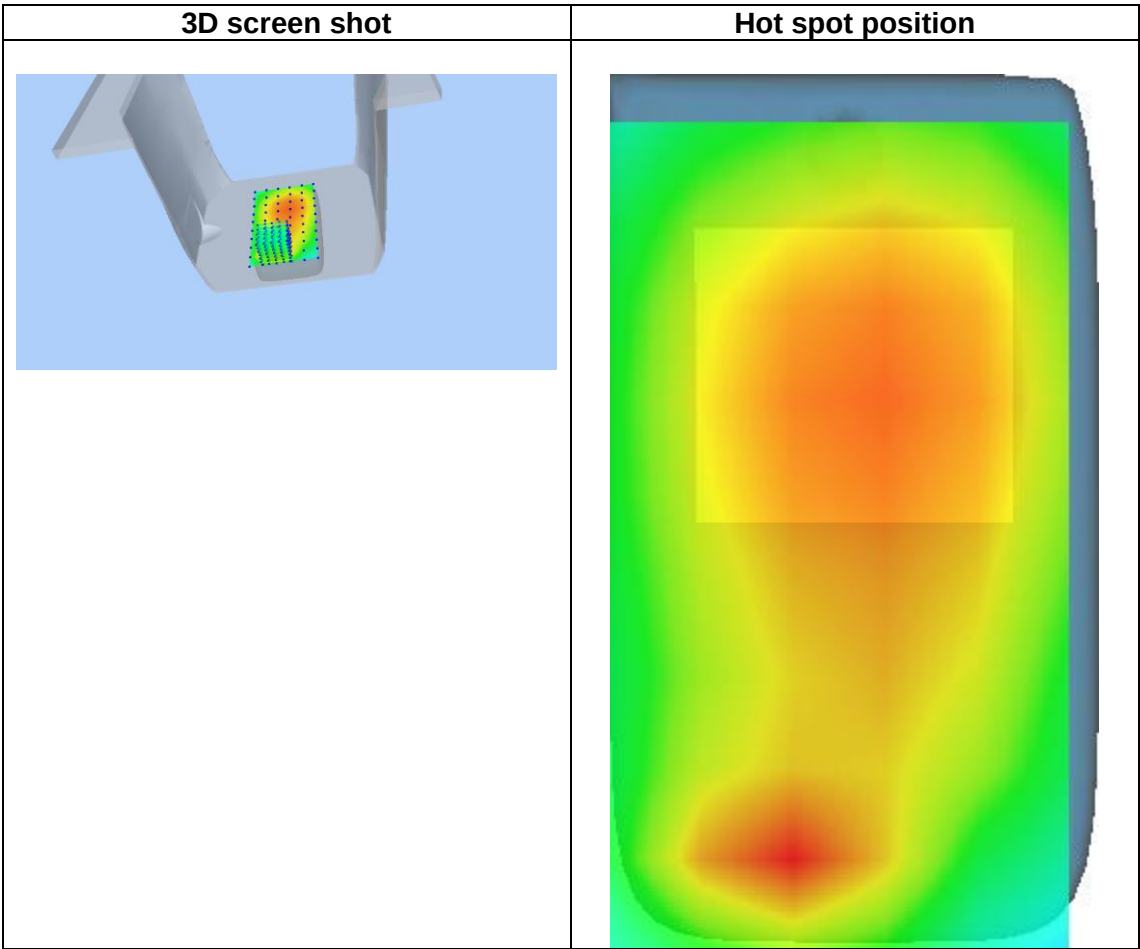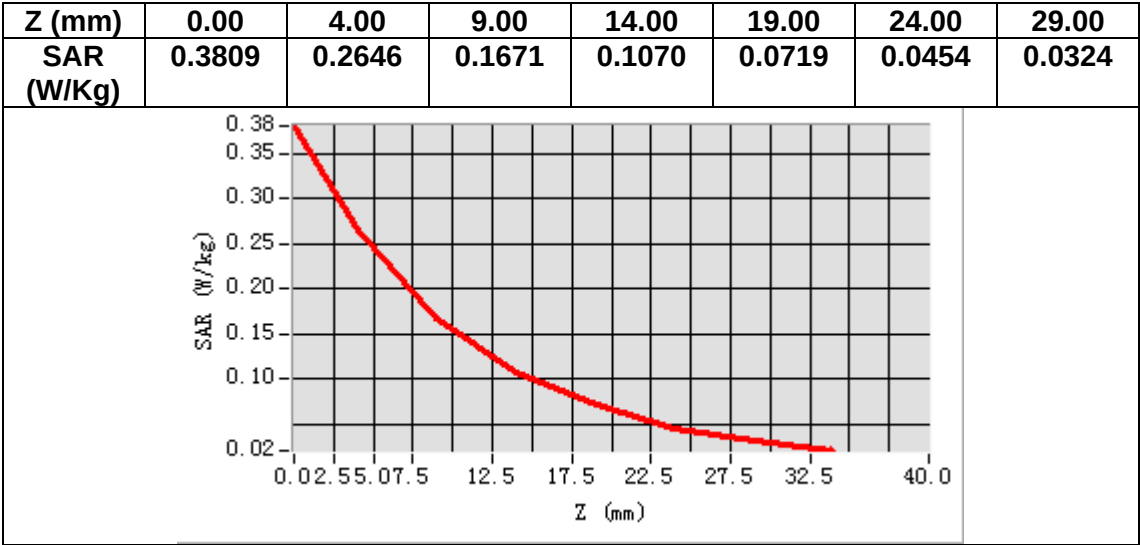

MEASUREMENT 5


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>IEEE 802.11b ISM</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11b (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	2437.000000
Relative permittivity (real part)	39.730099
Relative permittivity (imaginary part)	13.439400
Conductivity (S/m)	1.819545
Variation (%)	-0.190002

SURFACE SAR

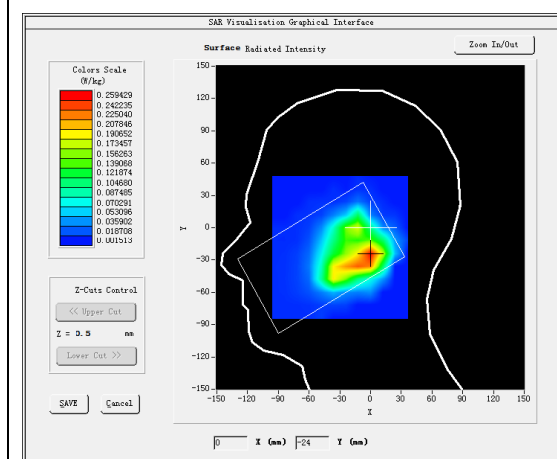



VOLUME SAR

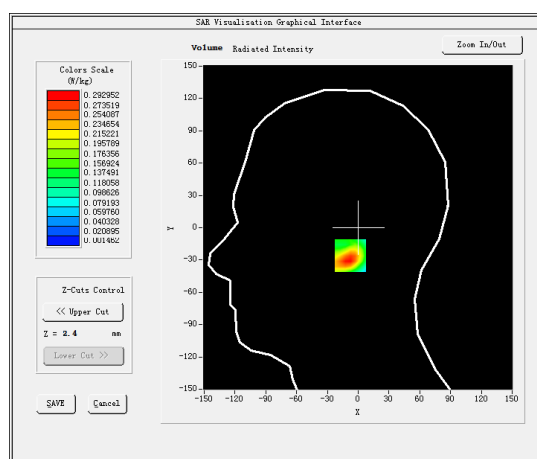

Maximum location: X=-1.00, Y=-26.00

SAR Peak: 0.48 W/kg

SAR 10g (W/Kg)	0.135780
SAR 1g (W/Kg)	0.274514

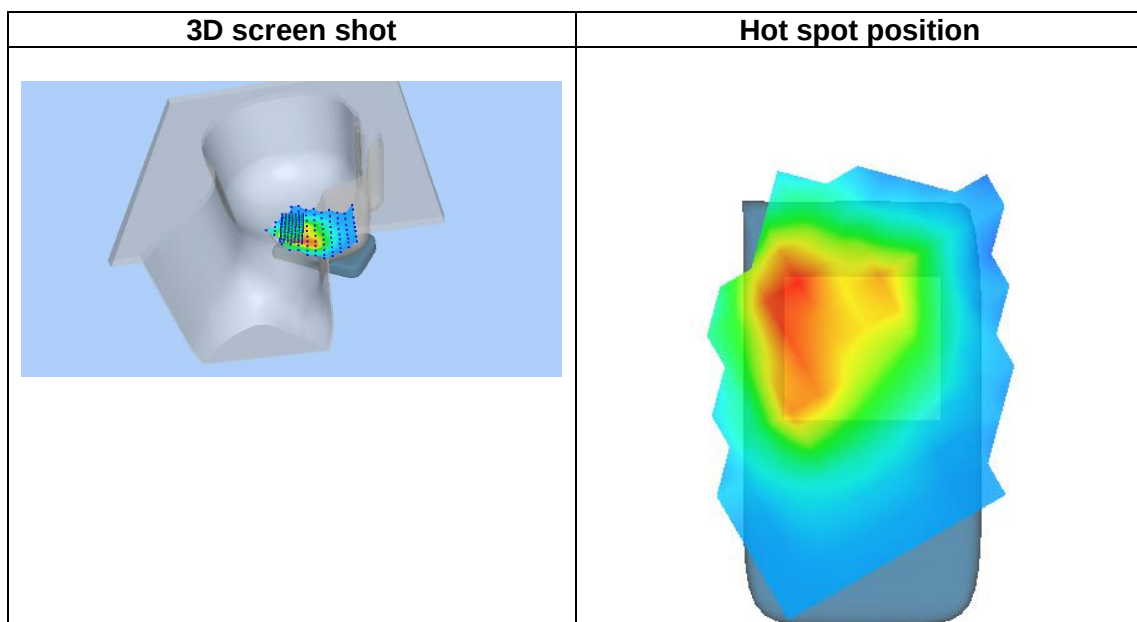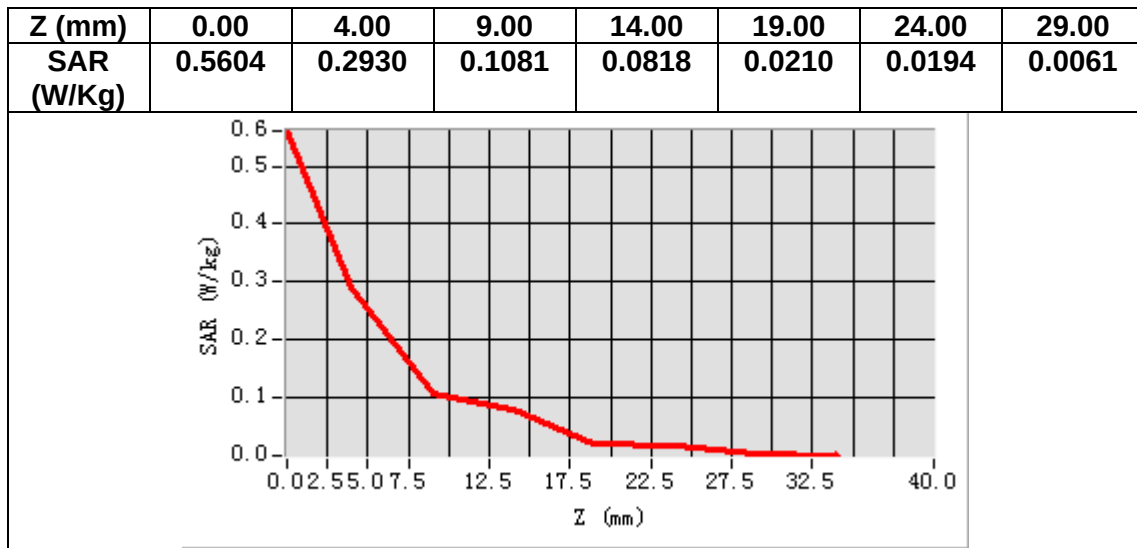

MEASUREMENT 6


A. Experimental conditions.

Area Scan	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
ZoomScan	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>IEEE 802.11b ISM</u>
Channels	<u>Middle</u>
Signal	<u>IEEE802.11b (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	2437.000000
Relative permittivity (real part)	52.160599
Relative permittivity (imaginary part)	14.365620
Conductivity (S/m)	1.944945
Variation (%)	0.890000

SURFACE SAR

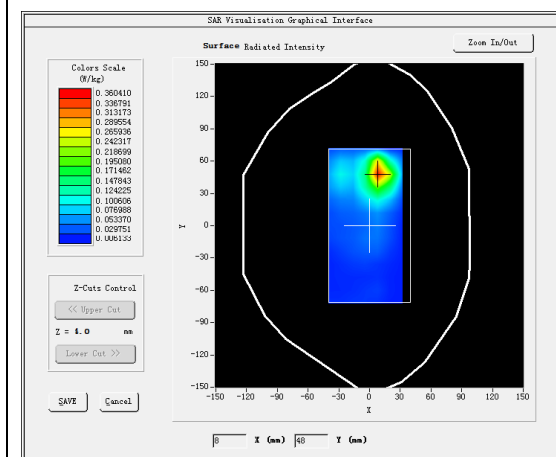



VOLUME SAR

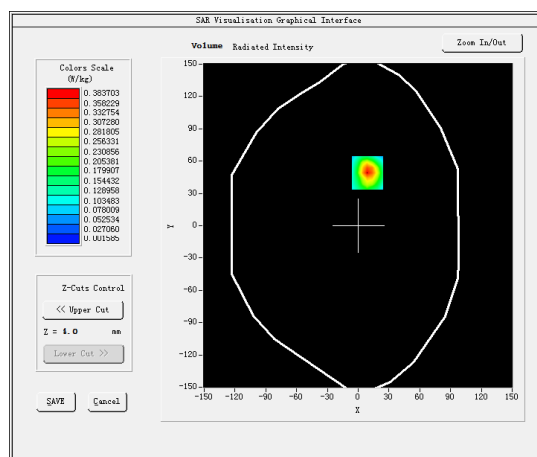

Maximum location: X=9.00, Y=49.00

SAR Peak: 0.66 W/kg

SAR 10g (W/Kg)	0.160318
SAR 1g (W/Kg)	0.345038

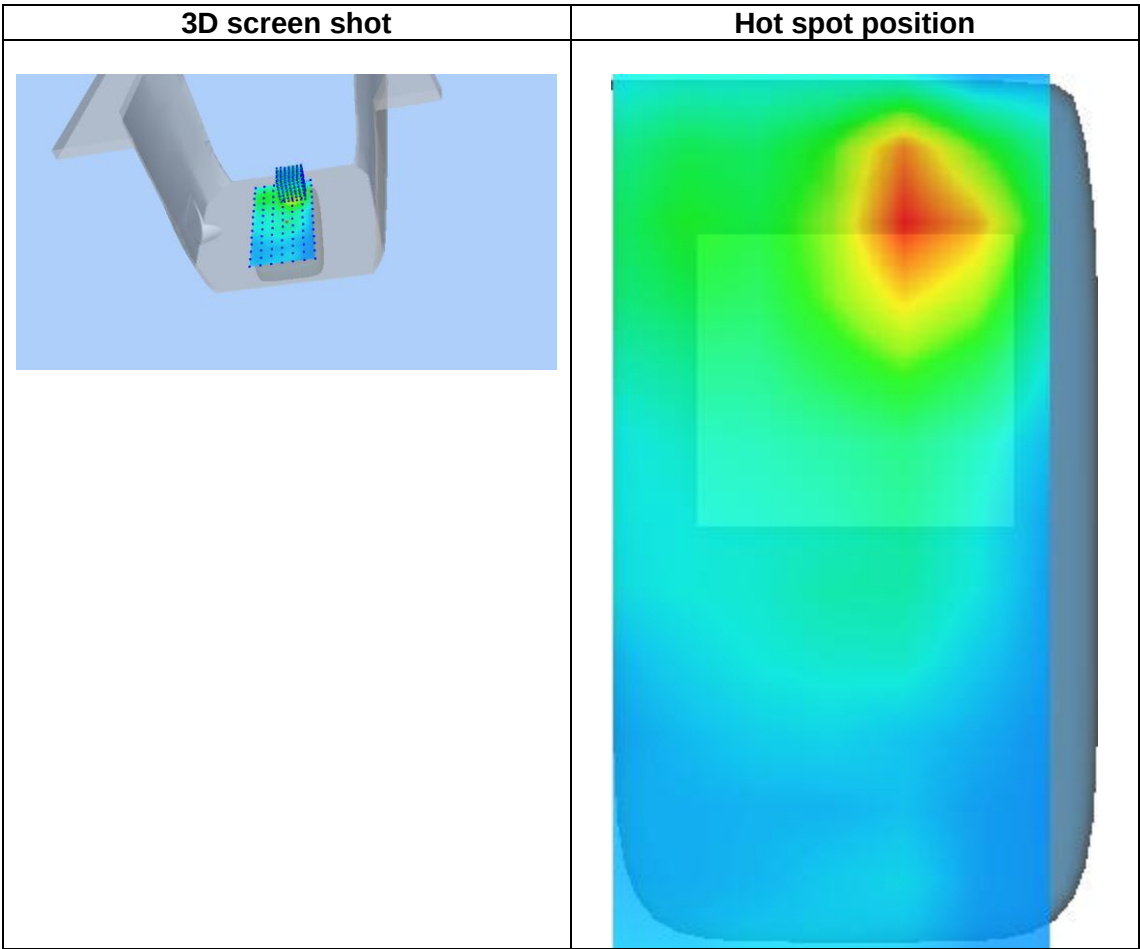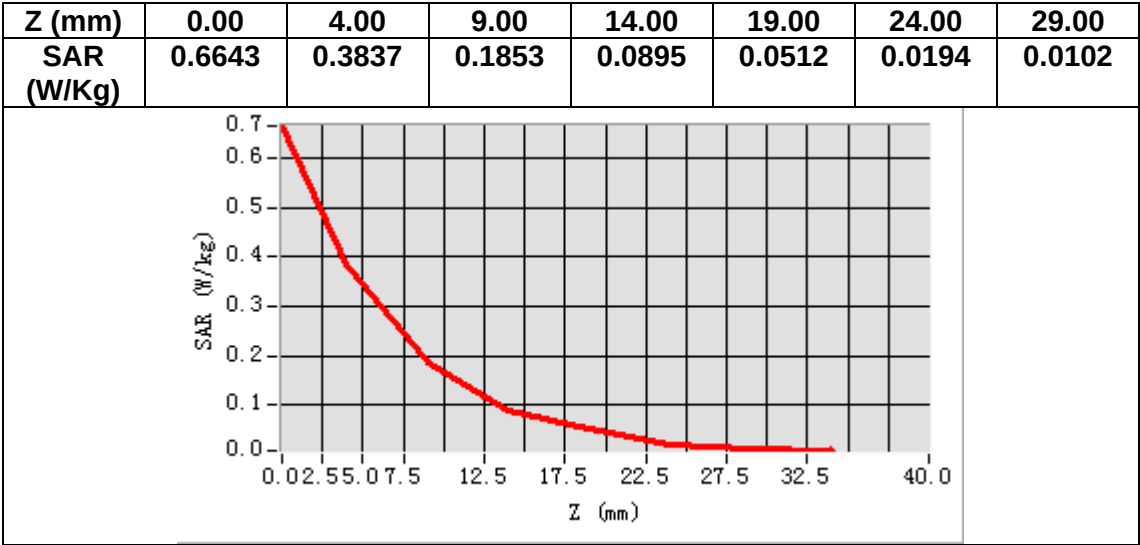

MEASUREMENT 7


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 4</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1732.500000
Relative permittivity (real part)	40.039291
Relative permittivity (imaginary part)	13.974592
Conductivity (S/m)	1.345054
Variation (%)	0.160000

SURFACE SAR

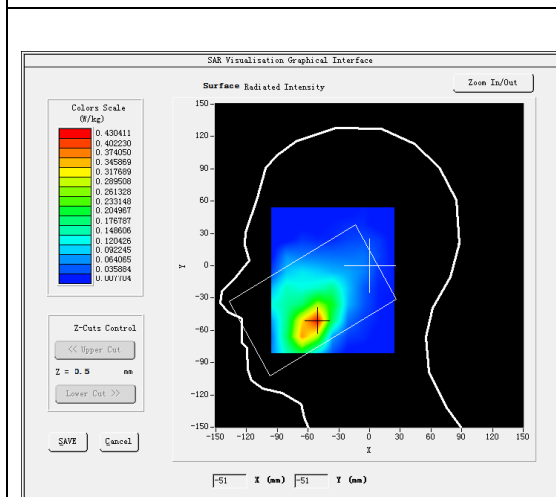



VOLUME SAR

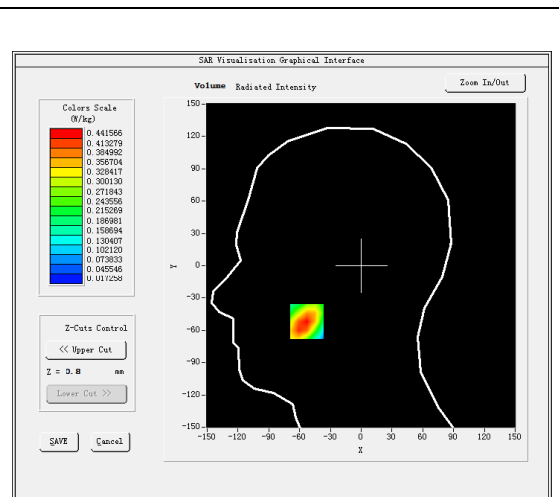

Maximum location: X=-53.00, Y=-52.00

SAR Peak: 0.60 W/kg

SAR 10g (W/Kg)	0.263603
SAR 1g (W/Kg)	0.421691

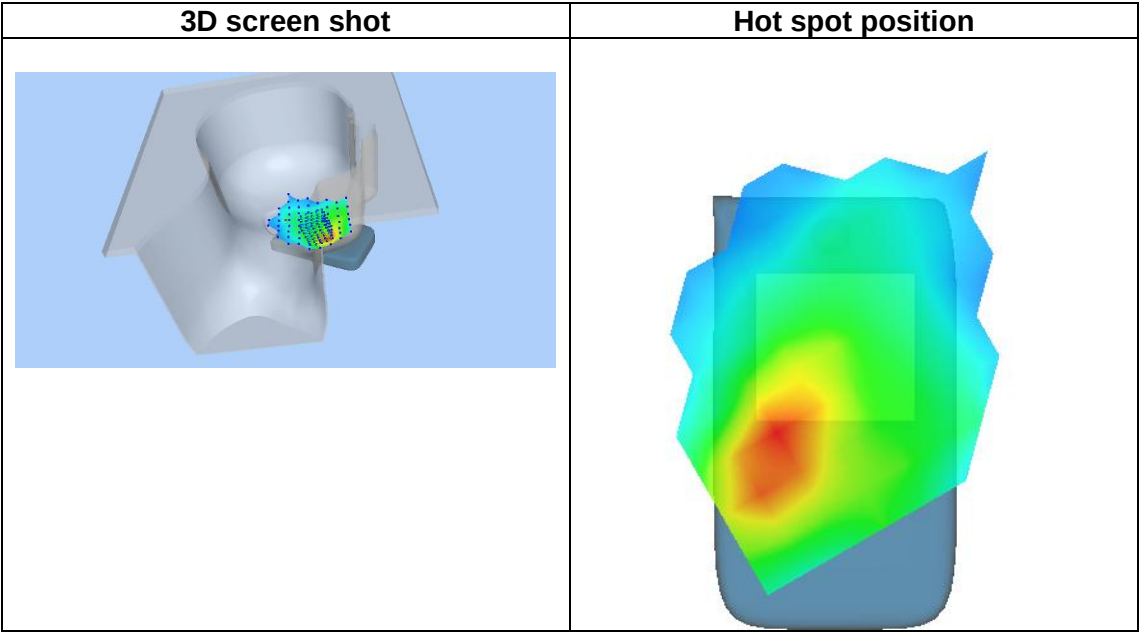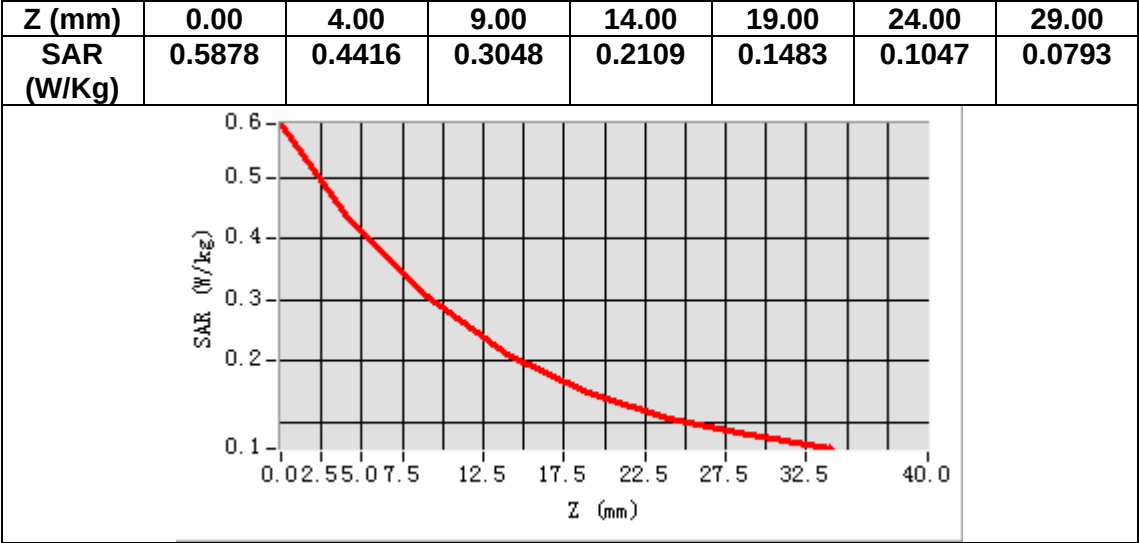

MEASUREMENT 8


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 4</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1732.500000
Relative permittivity (real part)	54.069366
Relative permittivity (imaginary part)	15.358220
Conductivity (S/m)	1.478229
Variation (%)	0.420000

SURFACE SAR

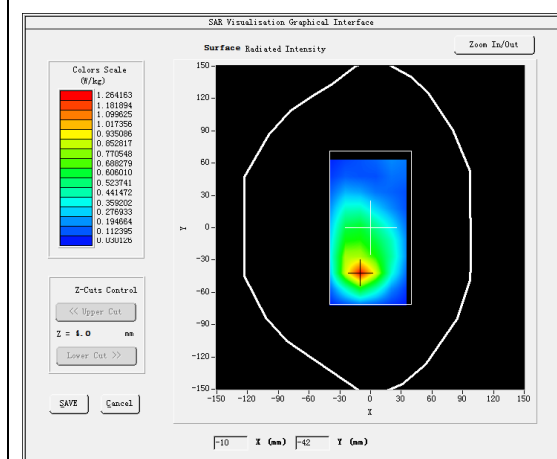



VOLUME SAR

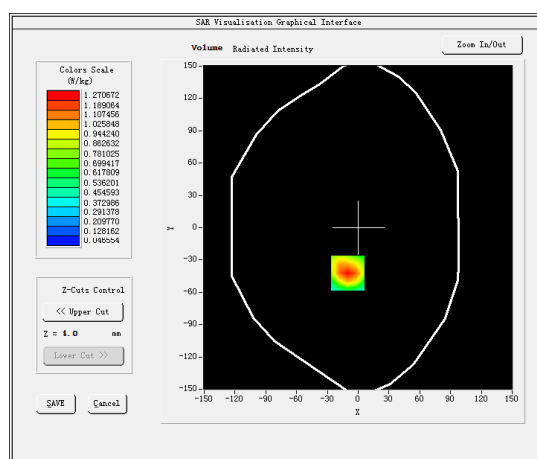

Maximum location: X=-10.00, Y=-42.00

SAR Peak: 1.81 W/kg

SAR 10g (W/Kg)	0.697389
SAR 1g (W/Kg)	1.095776

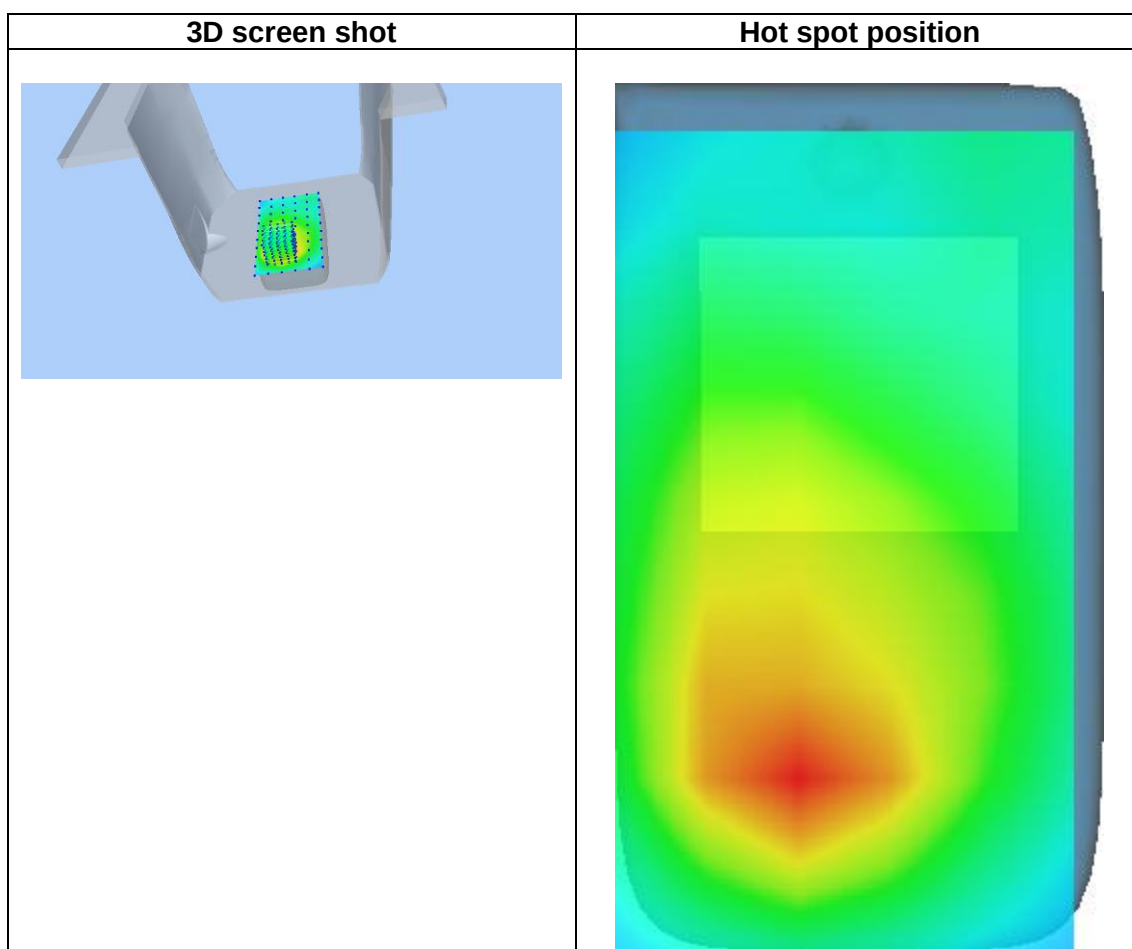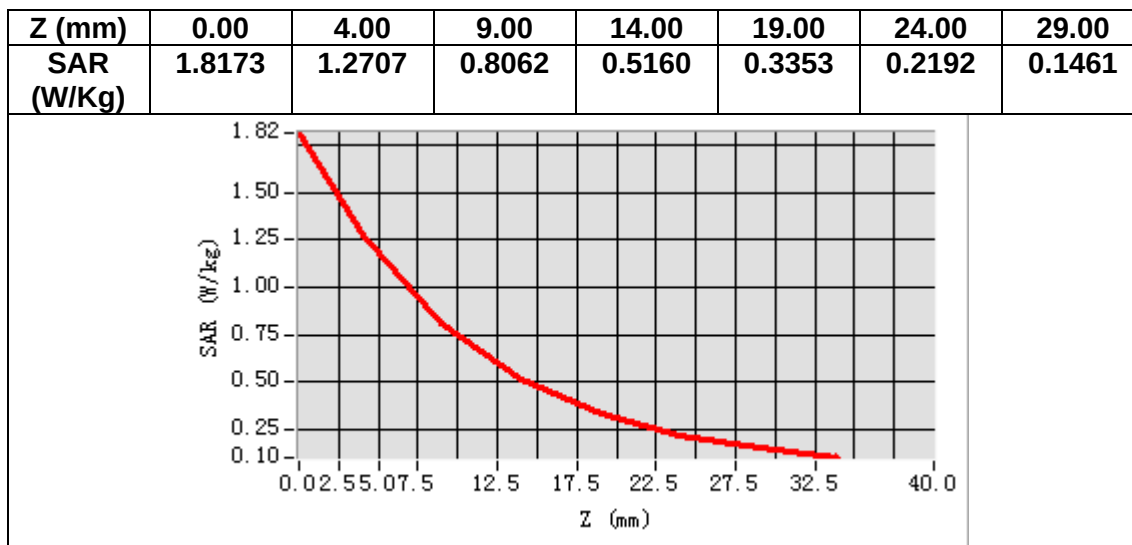

MEASUREMENT 9


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 5</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	836.500000
Relative permittivity (real part)	41.597244
Relative permittivity (imaginary part)	19.691660
Conductivity (S/m)	0.915115
Variation (%)	3.850000

SURFACE SAR

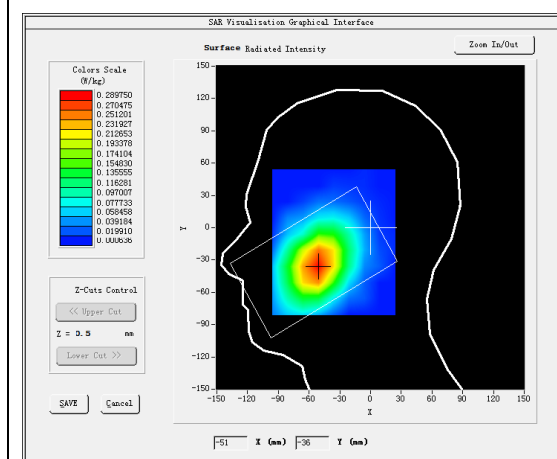



VOLUME SAR

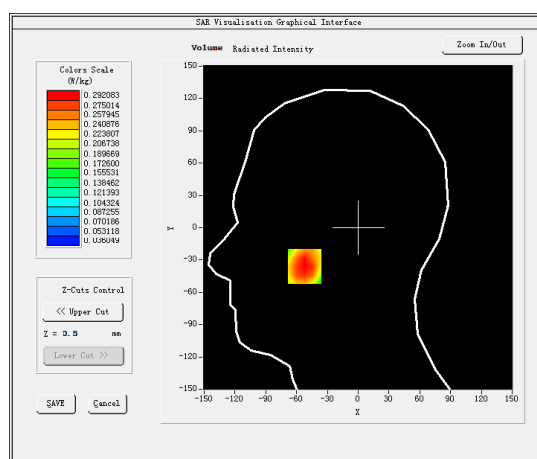

Maximum location: X=-52.00, Y=-36.00

SAR Peak: 0.36 W/kg

SAR 10g (W/Kg)	0.216897
SAR 1g (W/Kg)	0.286797

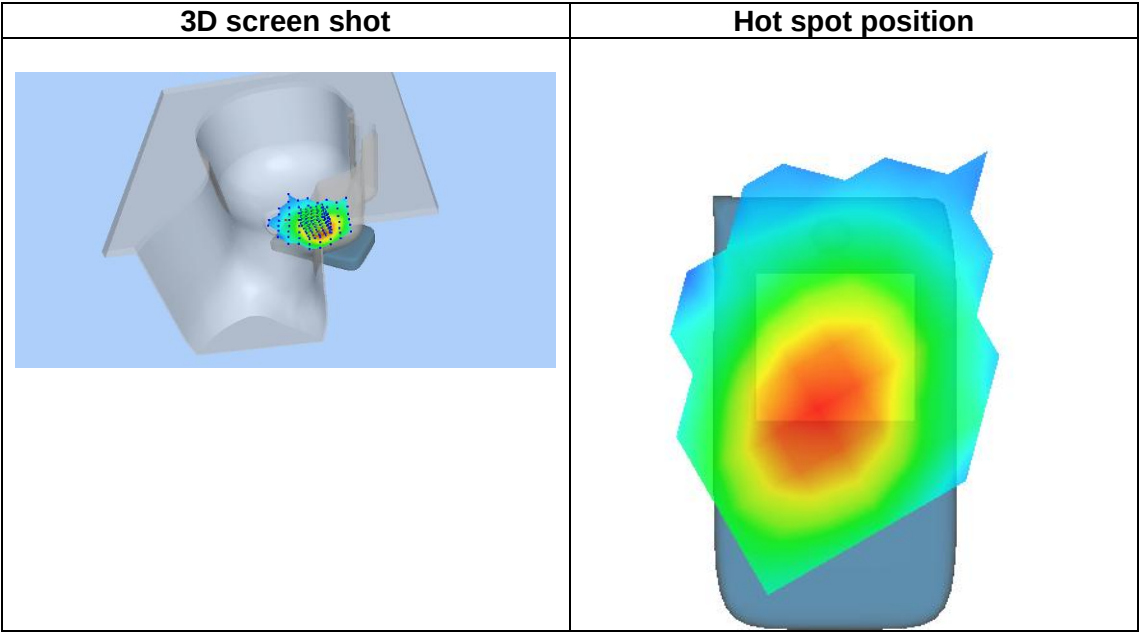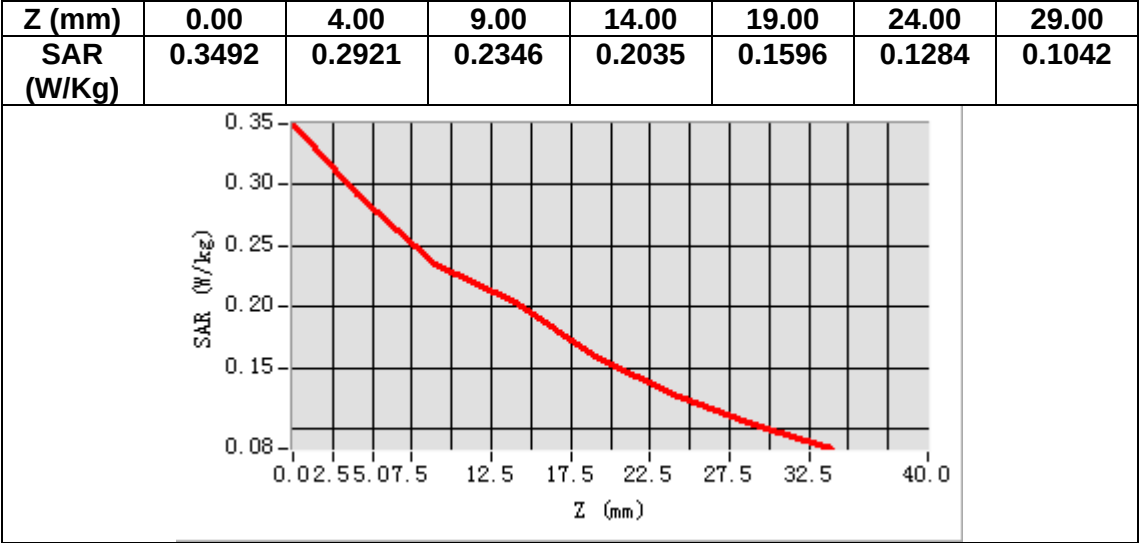

MEASUREMENT 10


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 5</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	836.500000
Relative permittivity (real part)	54.815498
Relative permittivity (imaginary part)	20.999001
Conductivity (S/m)	0.975870
Variation (%)	-1.230000

SURFACE SAR

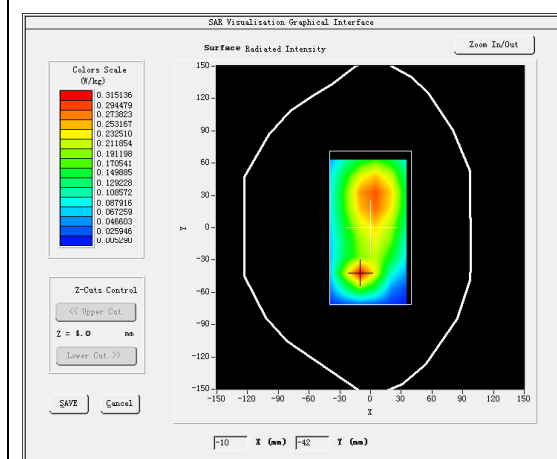



VOLUME SAR

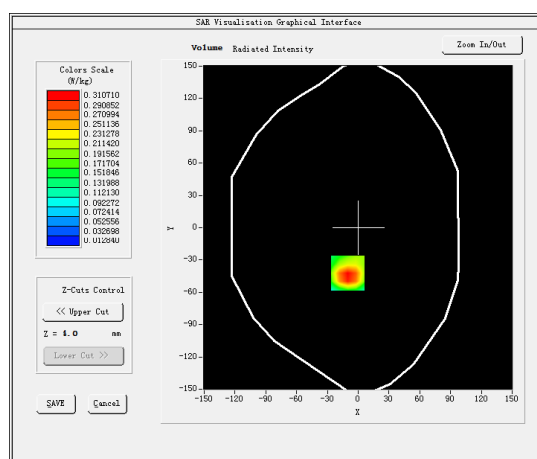

Maximum location: X=-10.00, Y=-42.00

SAR Peak: 0.48 W/kg

SAR 10g (W/Kg)	0.170808
SAR 1g (W/Kg)	0.307312

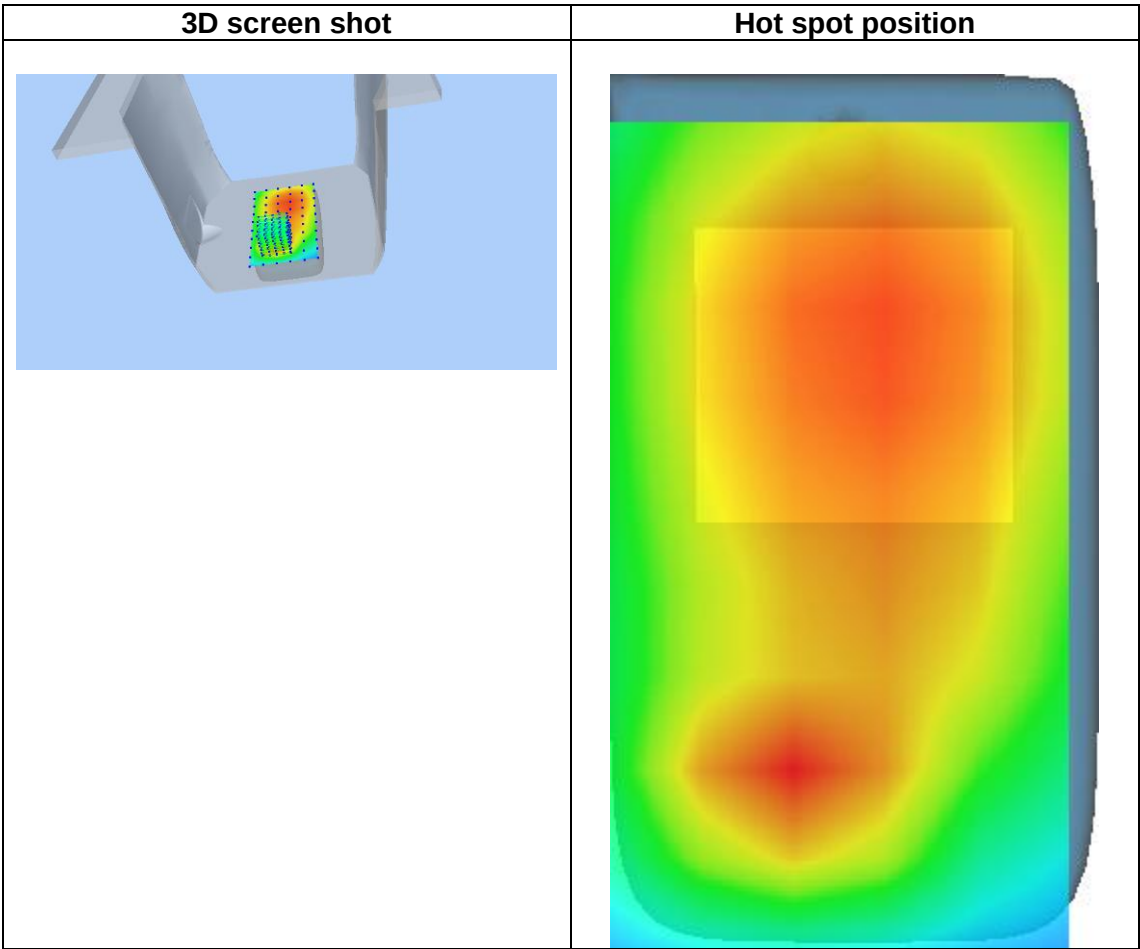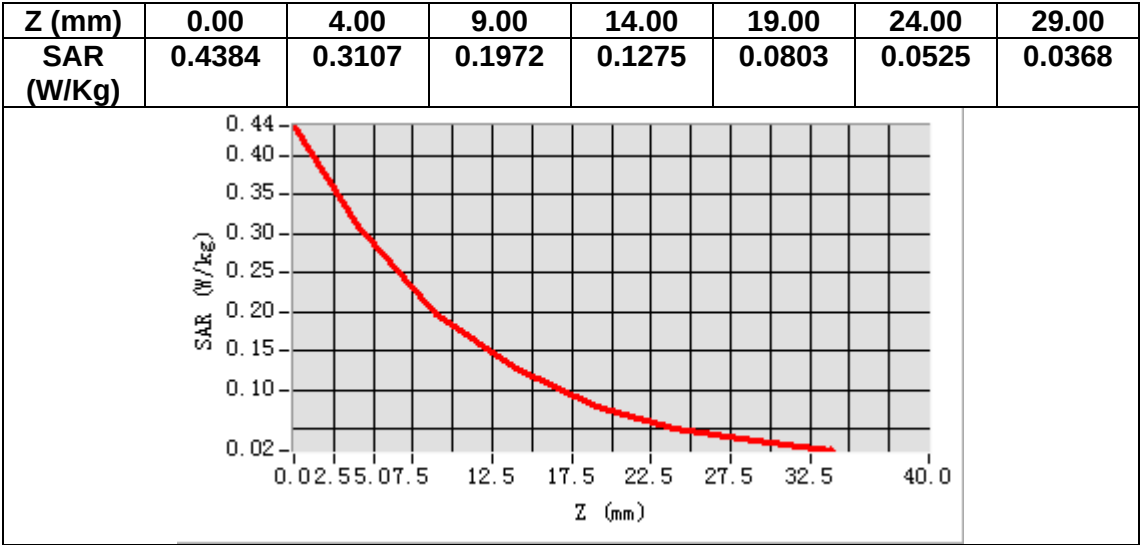

MEASUREMENT 11


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 7</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	2535.000000
Relative permittivity (real part)	39.305486
Relative permittivity (imaginary part)	13.511160
Conductivity (S/m)	1.896342
Variation (%)	2.300000

SURFACE SAR

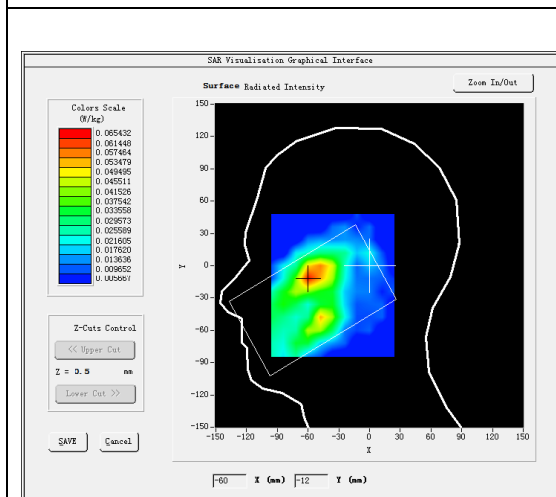



VOLUME SAR

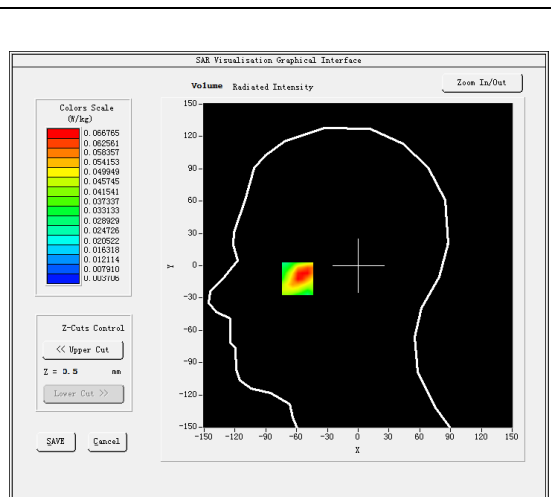

Maximum location: X=-59.00, Y=-11.00

SAR Peak: 0.10 W/kg

SAR 10g (W/Kg)	0.037878
SAR 1g (W/Kg)	0.062854

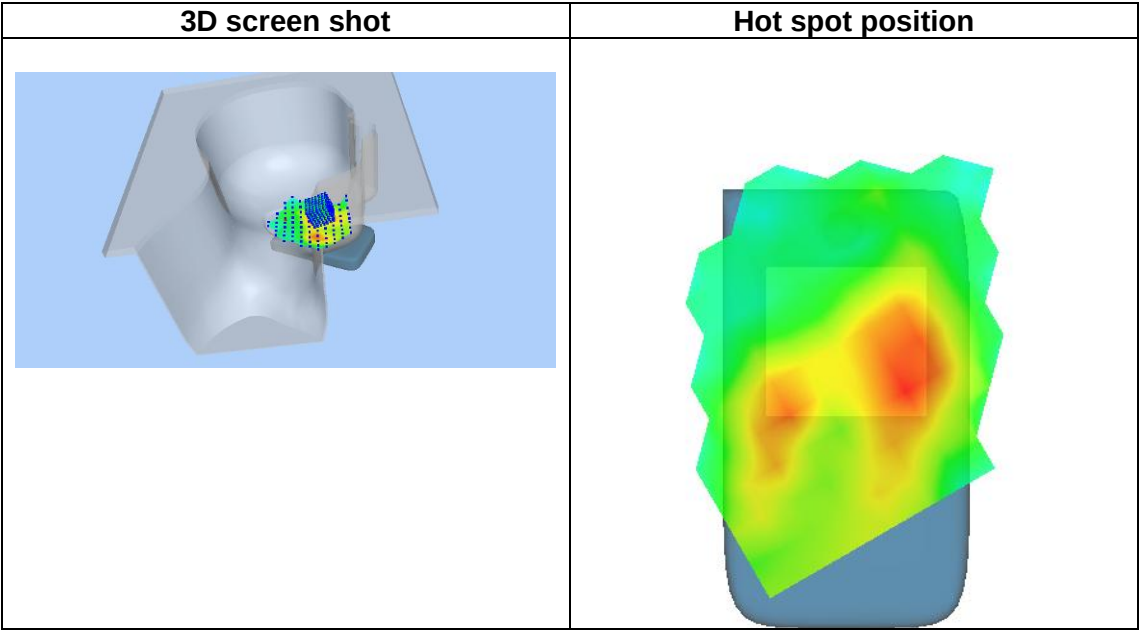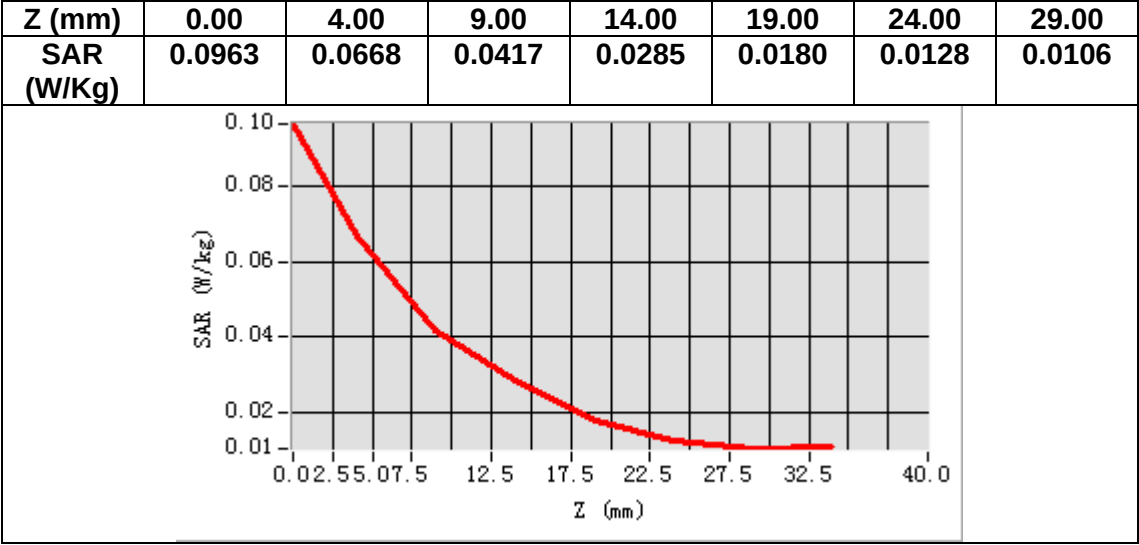

MEASUREMENT 12


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 7</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	2535.000000
Relative permittivity (real part)	53.506946
Relative permittivity (imaginary part)	14.907840
Conductivity (S/m)	2.101633
Variation (%)	-0.250000

SURFACE SAR

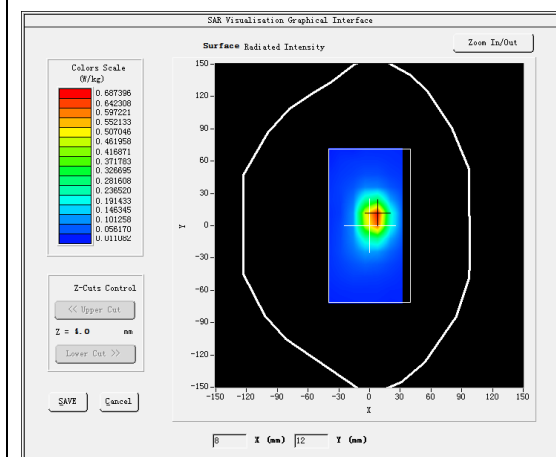



VOLUME SAR

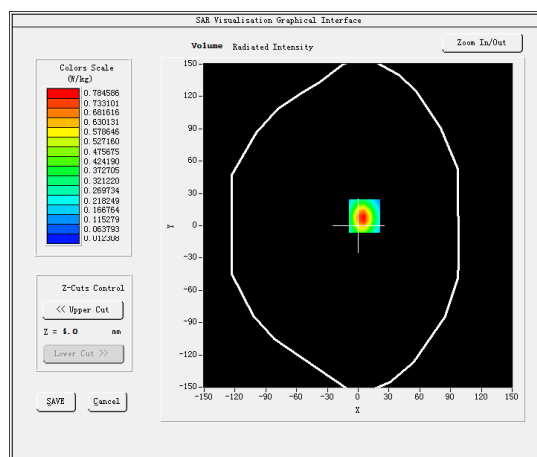

Maximum location: X=6.00, Y=9.00

SAR Peak: 1.28 W/kg

SAR 10g (W/Kg)	0.340997
SAR 1g (W/Kg)	0.714795

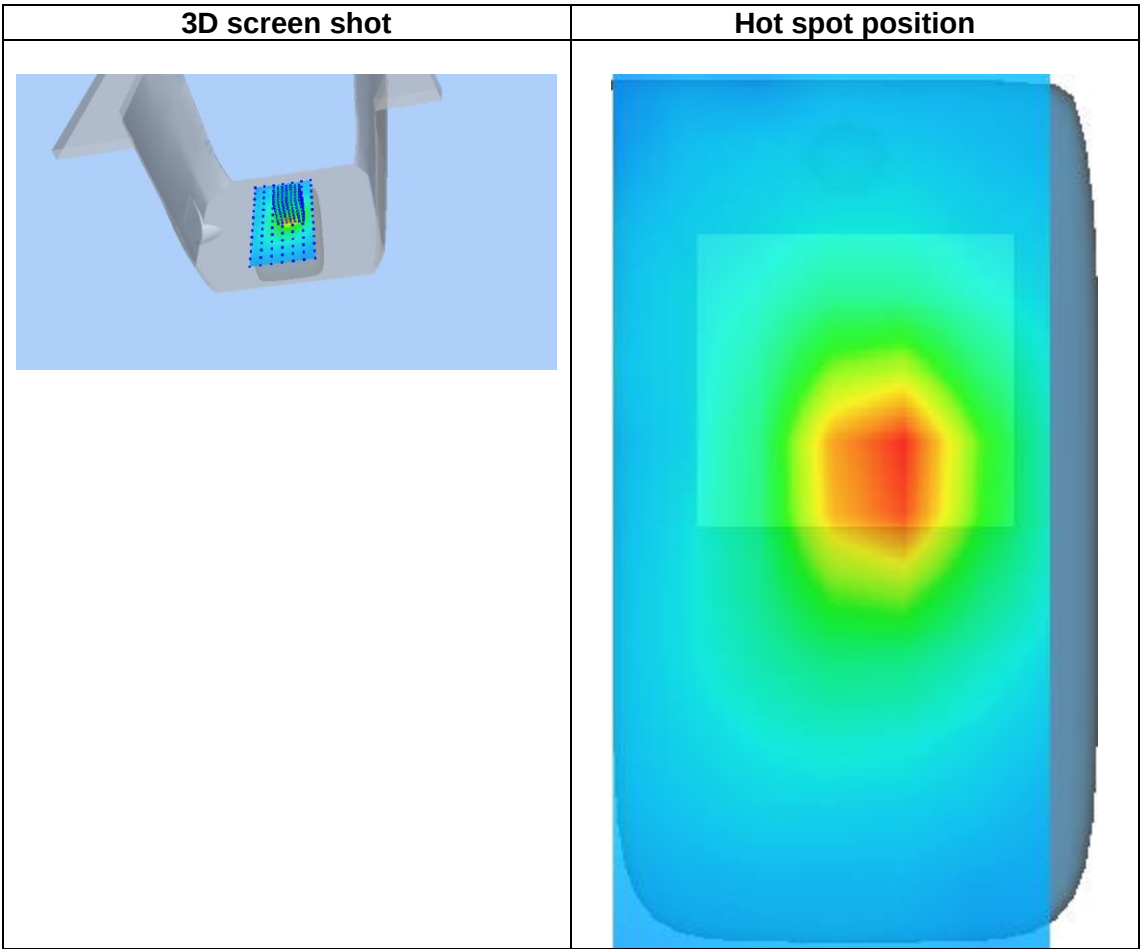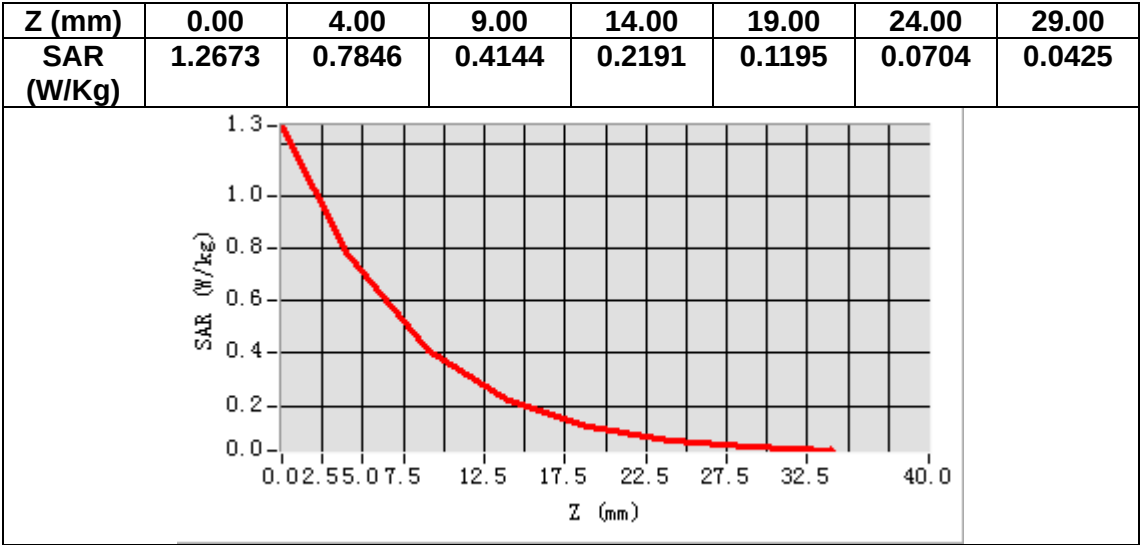

MEASUREMENT 13


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>GSM850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 2.0)</u>


B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	41.594166
Relative permittivity (imaginary part)	19.687820
Conductivity (S/m)	0.914827
Variation (%)	1.980000

SURFACE SAR

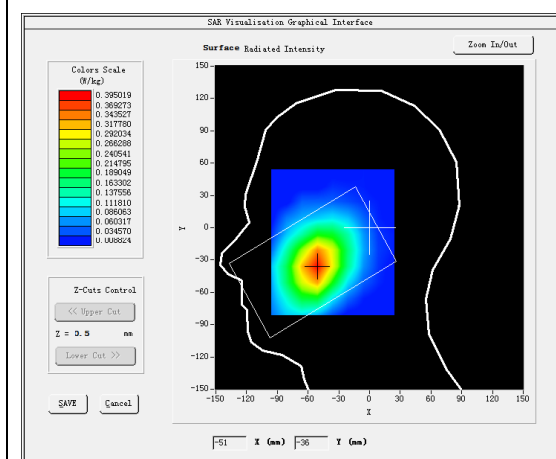


VOLUME SAR

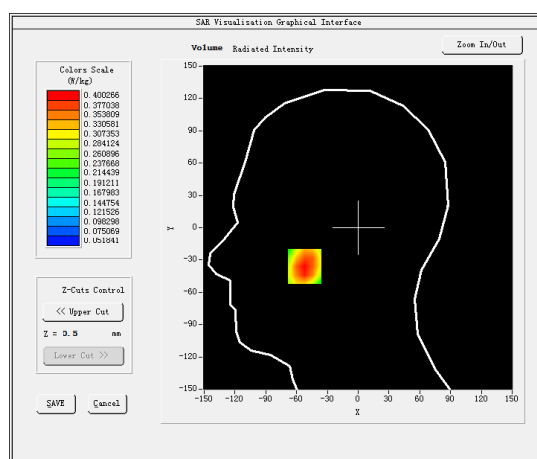

Maximum location: X=-52.00, Y=-36.00

SAR Peak: 0.51 W/kg

SAR 10g (W/Kg)	0.286981
SAR 1g (W/Kg)	0.389814

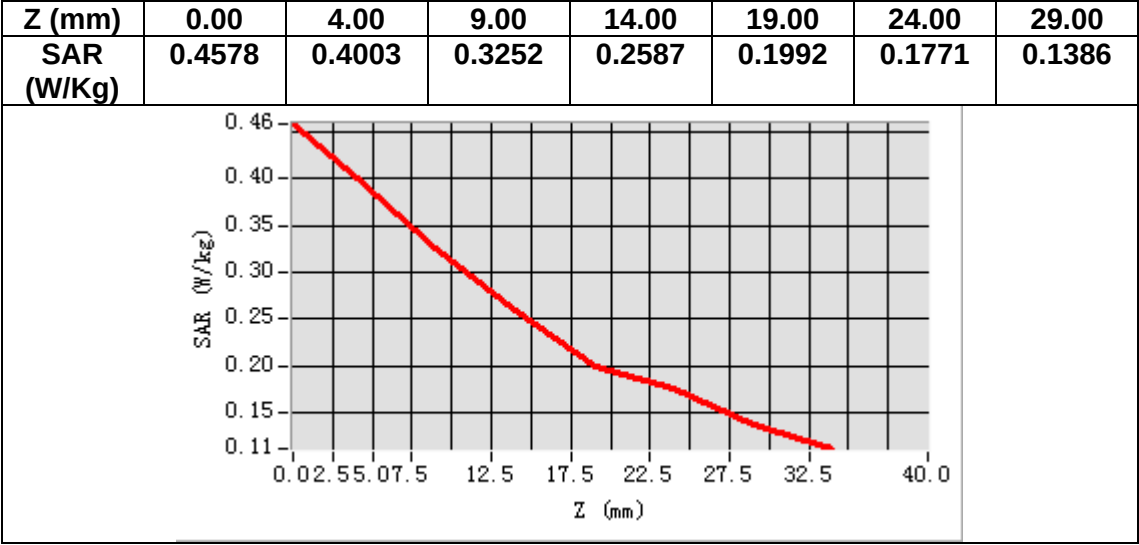

MEASUREMENT 14


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>GSM850</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 2.0)</u>


B. SAR Measurement Results

Frequency (MHz)	836.400000
Relative permittivity (real part)	54.811581
Relative permittivity (imaginary part)	21.004740
Conductivity (S/m)	0.976020
Variation (%)	-3.370000

SURFACE SAR

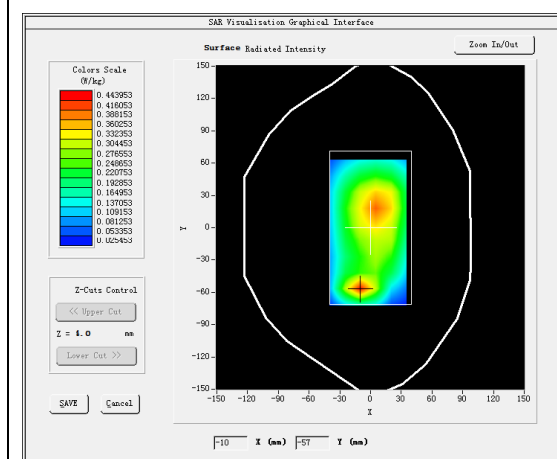



VOLUME SAR

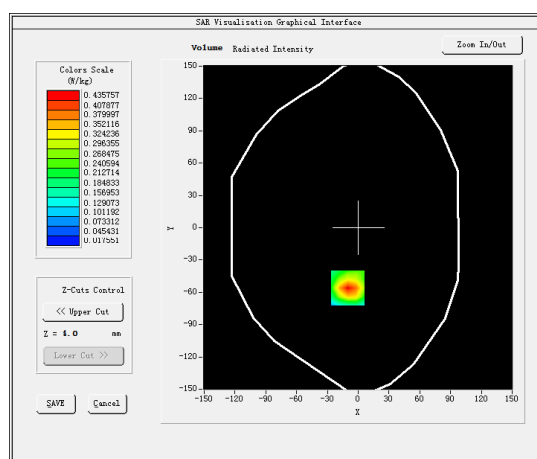

Maximum location: X=-10.00, Y=-56.00

SAR Peak: 0.64 W/kg

SAR 10g (W/Kg)	0.223764
SAR 1g (W/Kg)	0.403998

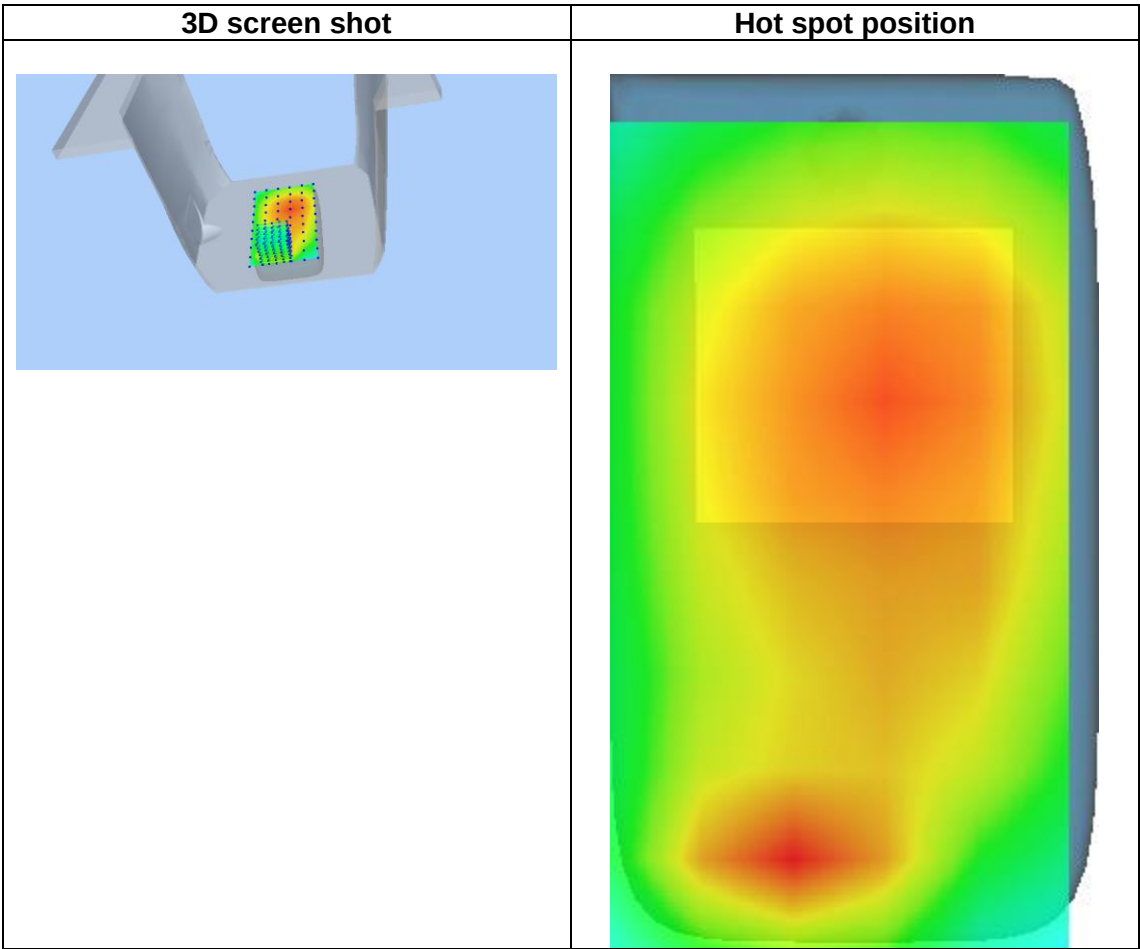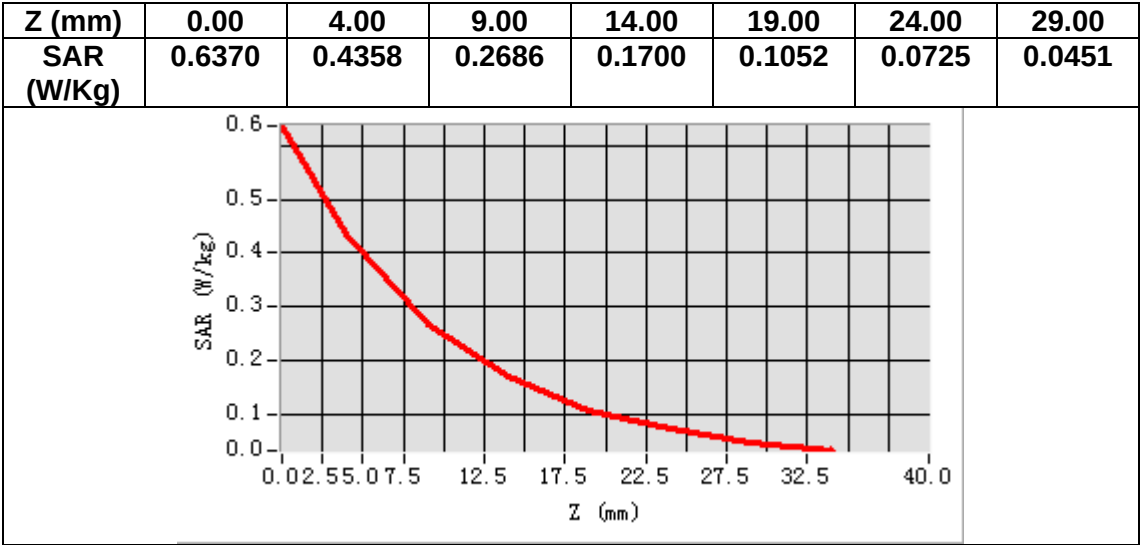

MEASUREMENT 15


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7,dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>GSM1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 2.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	39.759399
Relative permittivity (imaginary part)	13.582800
Conductivity (S/m)	1.418648
Variation (%)	-0.870000

SURFACE SAR

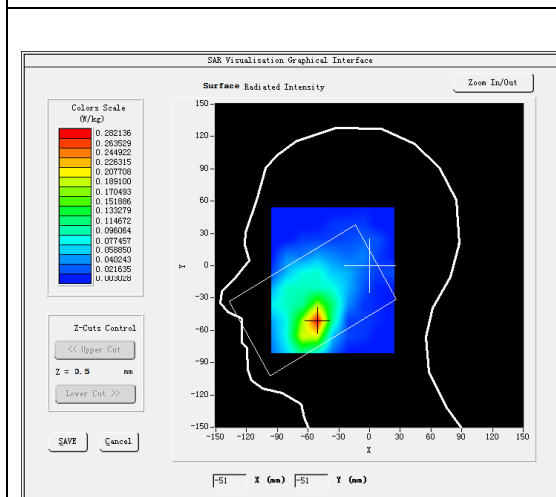



VOLUME SAR

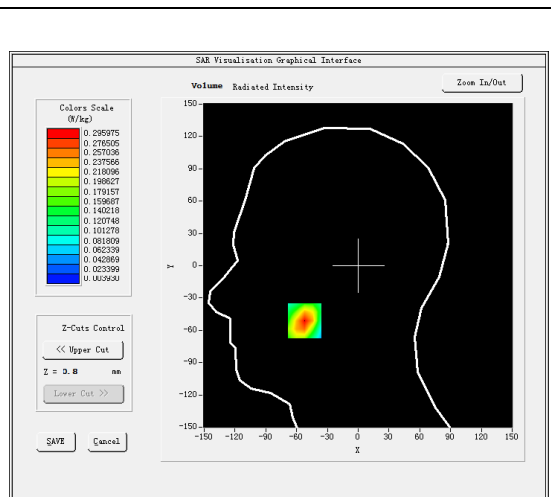

Maximum location: X=-52.00, Y=-51.00

SAR Peak: 0.43 W/kg

SAR 10g (W/Kg)	0.164513
SAR 1g (W/Kg)	0.280834

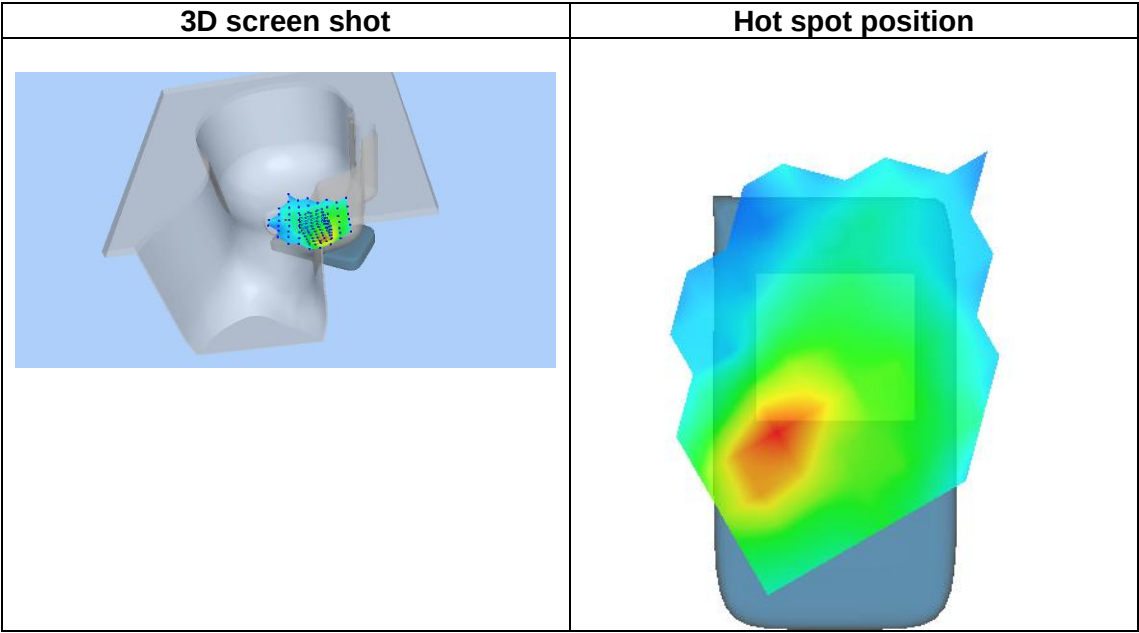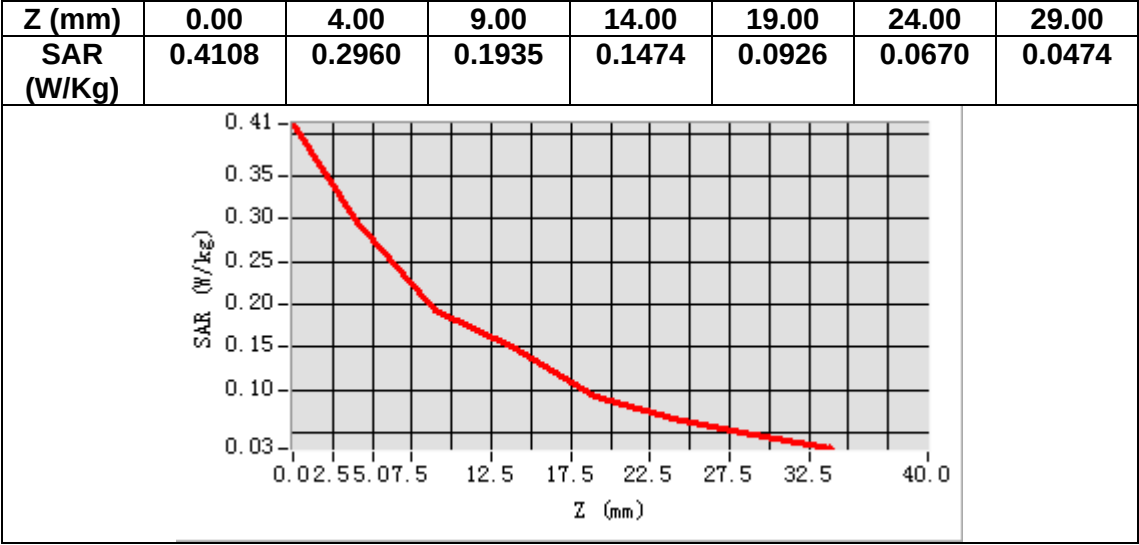

MEASUREMENT 16


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=15mm dy=15mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>5x5x7, dx=8mm dy=8mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>GSM1900</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>TDMA (Crest factor: 2.0)</u>


B. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	54.114899
Relative permittivity (imaginary part)	14.497900
Conductivity (S/m)	1.514225
Variation (%)	-1.900000

SURFACE SAR

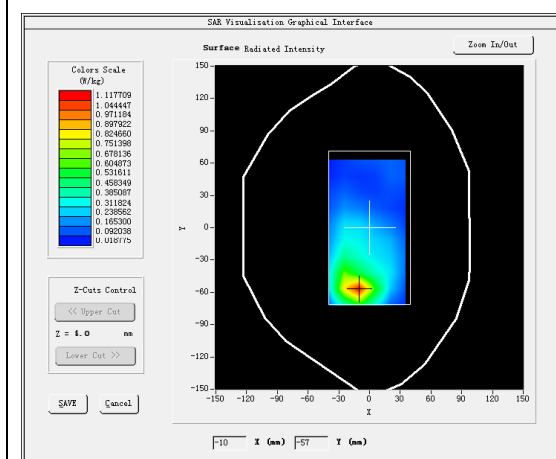

VOLUME SAR

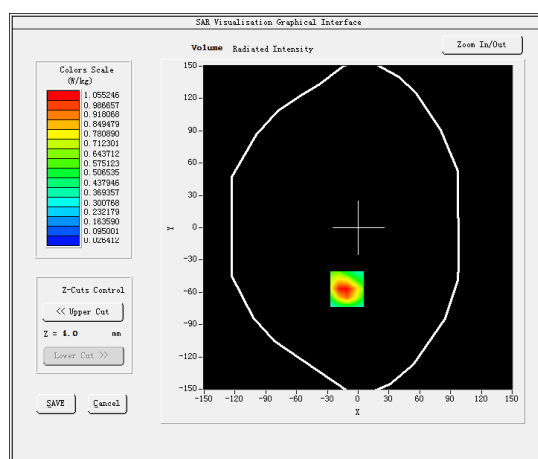

Maximum location: X=-11.00, Y=-57.00

SAR Peak: 1.58 W/kg

SAR 10g (W/Kg)	0.547334
SAR 1g (W/Kg)	1.006708

MEASUREMENT 17


A. Experimental conditions.

Area Scan	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
ZoomScan	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
Phantom	<u>Left head</u>
Device Position	<u>Cheek</u>
Band	<u>LTE band 38</u>
Channels	<u>Middle</u>
Signal	<u>LTE (Crest factor: 1.6)</u>


B. SAR Measurement Results

Frequency (MHz)	2595.000000
Relative permittivity (real part)	38.937586
Relative permittivity (imaginary part)	13.724960
Conductivity (S/m)	1.978681
Variation (%)	-2.050000

SURFACE SAR

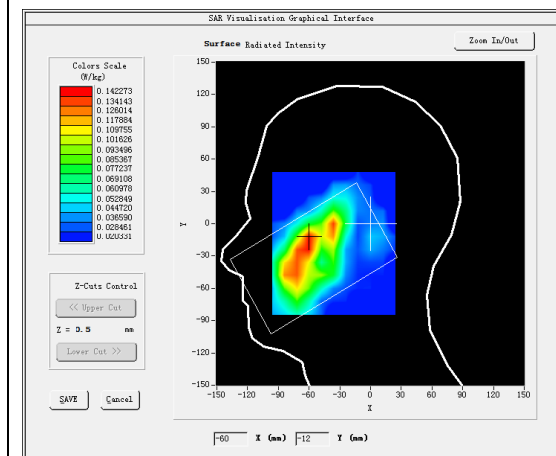



VOLUME SAR

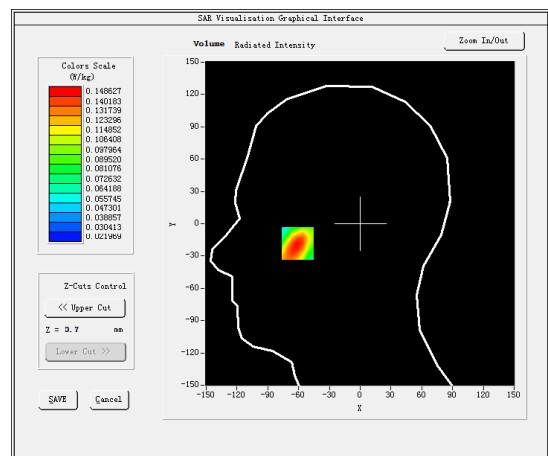

Maximum location: X=-61.00, Y=-17.00

SAR Peak: 0.20 W/kg

SAR 10g (W/Kg)	0.111101
SAR 1g (W/Kg)	0.082035

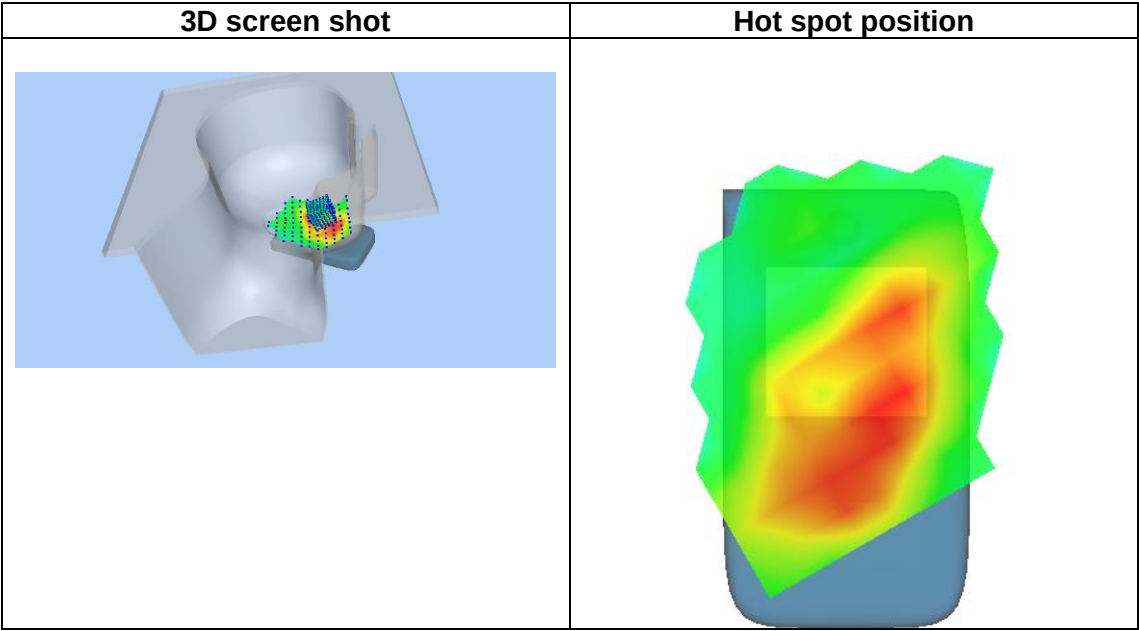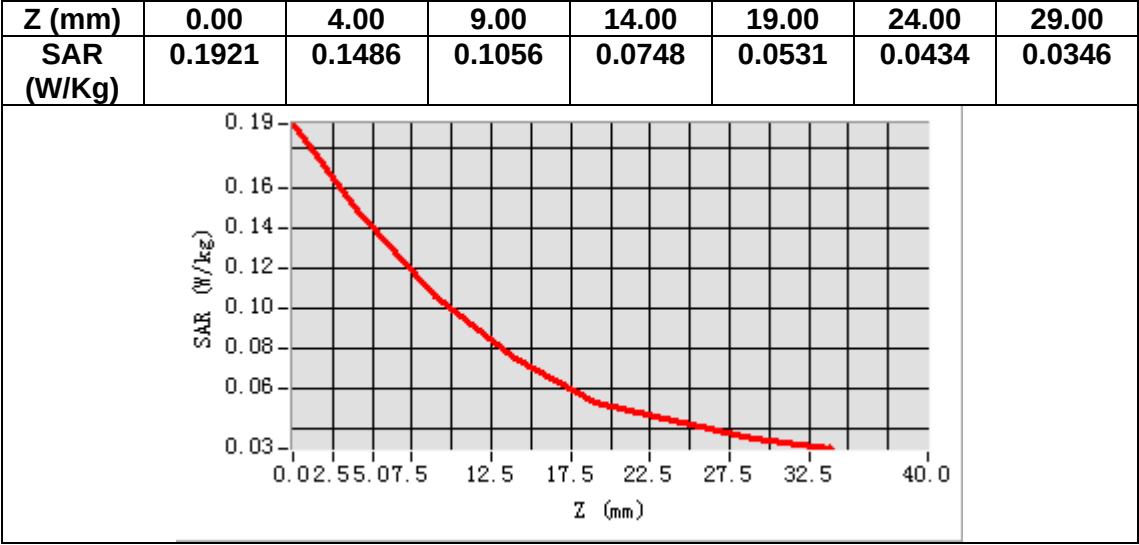

MEASUREMENT 18


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 38</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.6)</u>


B. SAR Measurement Results

Frequency (MHz)	2595.000000
Relative permittivity (real part)	53.139046
Relative permittivity (imaginary part)	15.121640
Conductivity (S/m)	2.180036
Variation (%)	2.170000

SURFACE SAR

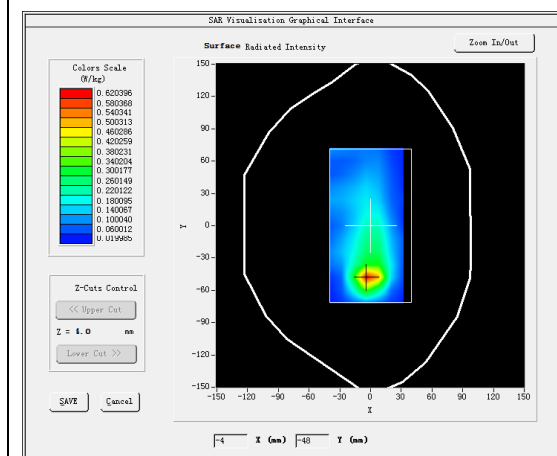



VOLUME SAR

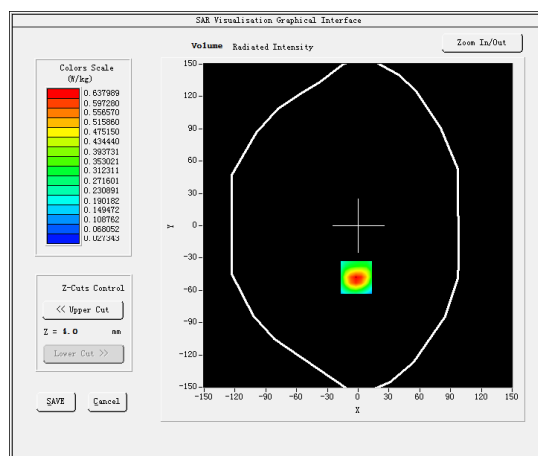

Maximum location: X=-2.00, Y=-48.00

SAR Peak: 1.02 W/kg

SAR 10g (W/Kg)	0.206459
SAR 1g (W/Kg)	0.372447

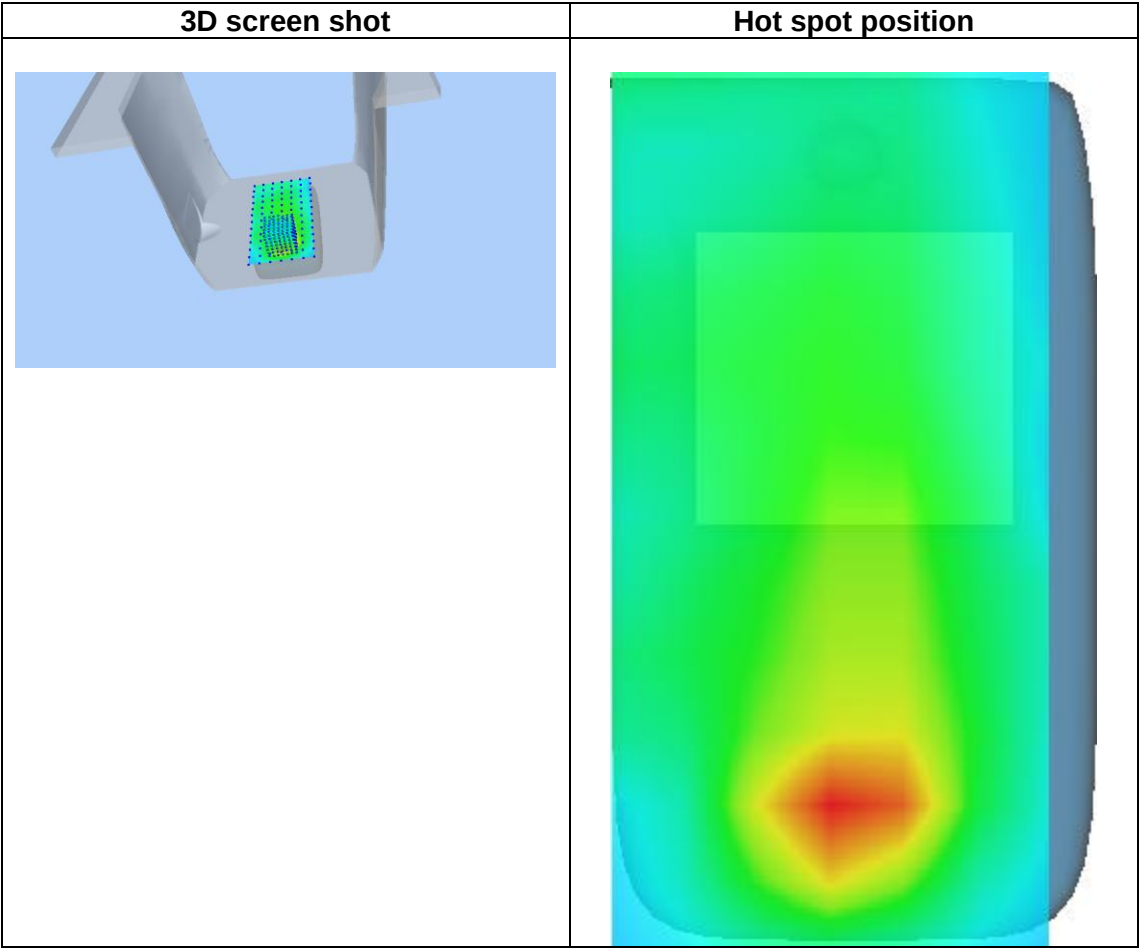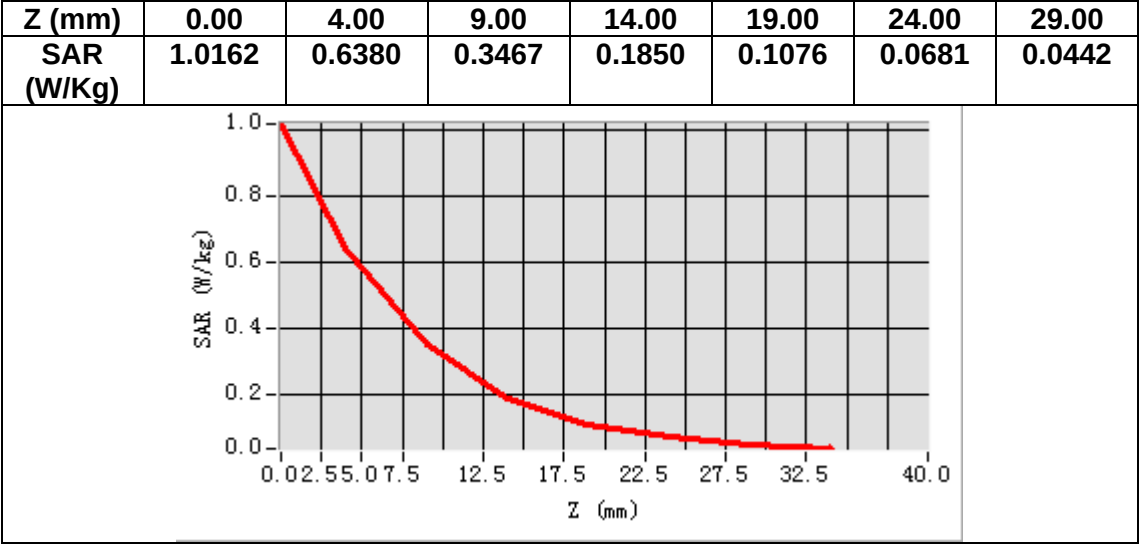

MEASUREMENT 19


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 40 A</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.6)</u>


B. SAR Measurement Results

Frequency (MHz)	2312.500000
Relative permittivity (real part)	39.343223
Relative permittivity (imaginary part)	13.184833
Conductivity (S/m)	1.693884
Variation (%)	3.090000

SURFACE SAR

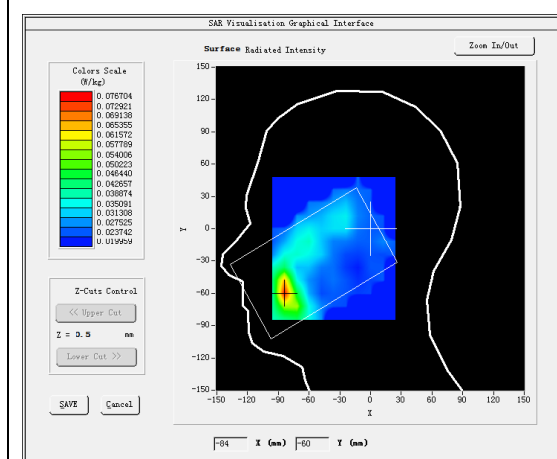



VOLUME SAR

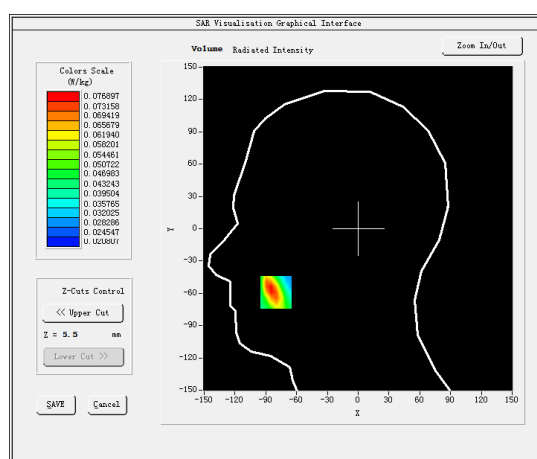

Maximum location: X=-80.00, Y=-59.00

SAR Peak: 0.10 W/kg

SAR 10g (W/Kg)	0.062546
SAR 1g (W/Kg)	0.078033

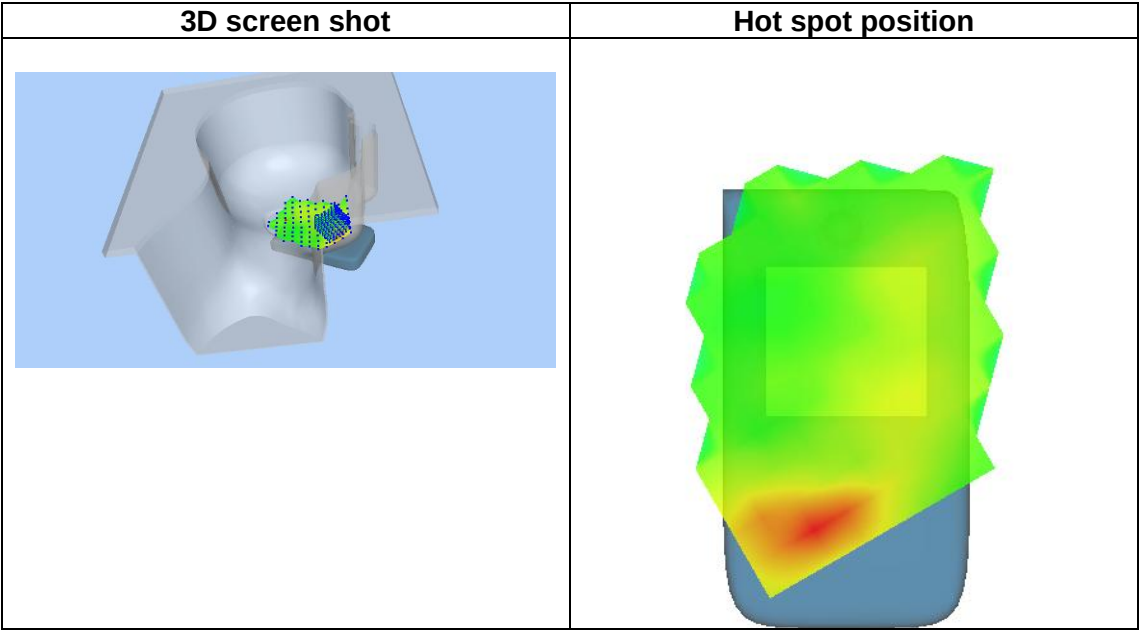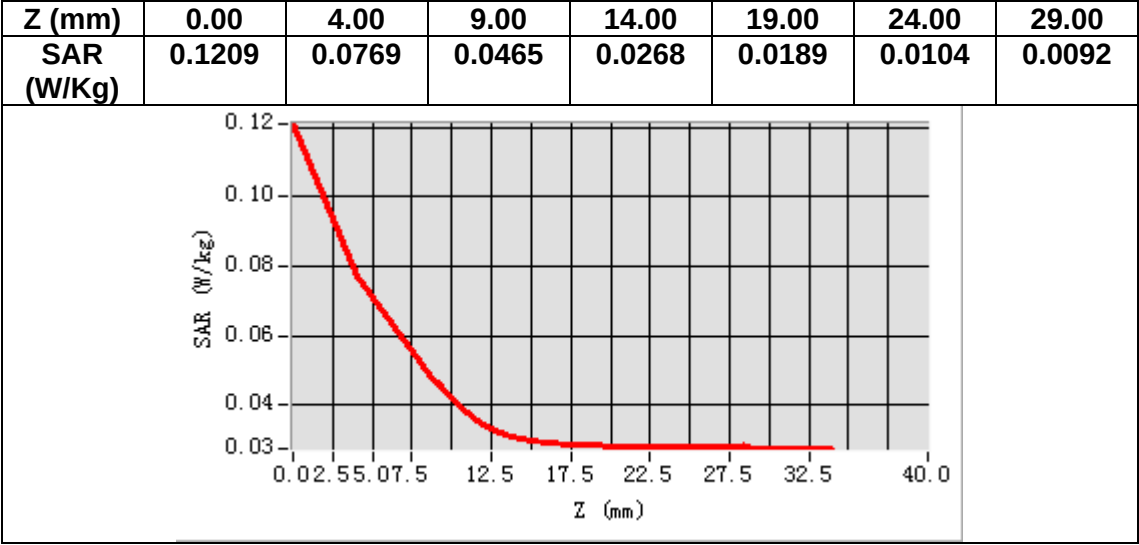

MEASUREMENT 20


A. Experimental conditions.

Area Scan	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
ZoomScan	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
Phantom	<u>Validation plane</u>
Device Position	<u>Body</u>
Band	<u>LTE band 40 A</u>
Channels	<u>Middle</u>
Signal	<u>LTE (Crest factor: 1.6)</u>


B. SAR Measurement Results

Frequency (MHz)	2312.500000
Relative permittivity (real part)	52.415300
Relative permittivity (imaginary part)	14.011020
Conductivity (S/m)	1.800026
Variation (%)	2.170000

SURFACE SAR

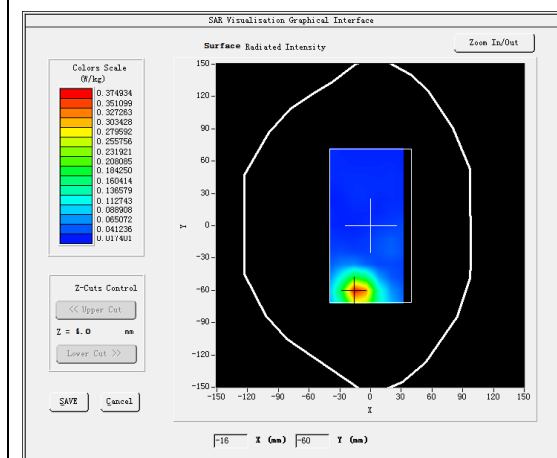

VOLUME SAR

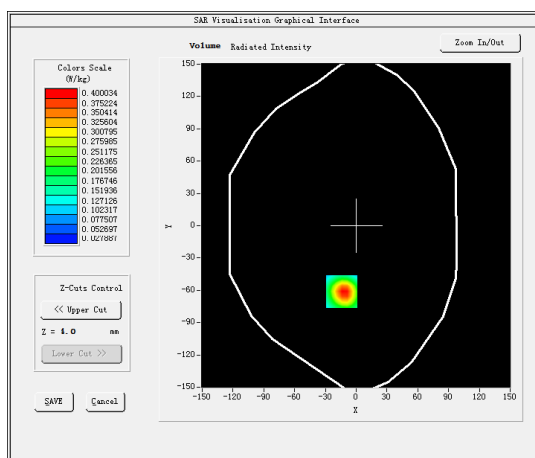


Maximum location: X=-14.00, Y=-61.00


SAR Peak: 0.59 W/kg

SAR 10g (W/Kg)	0.205813
SAR 1g (W/Kg)	0.372229


Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.5794	0.4000	0.2486	0.1579	0.1009	0.0697	0.0500

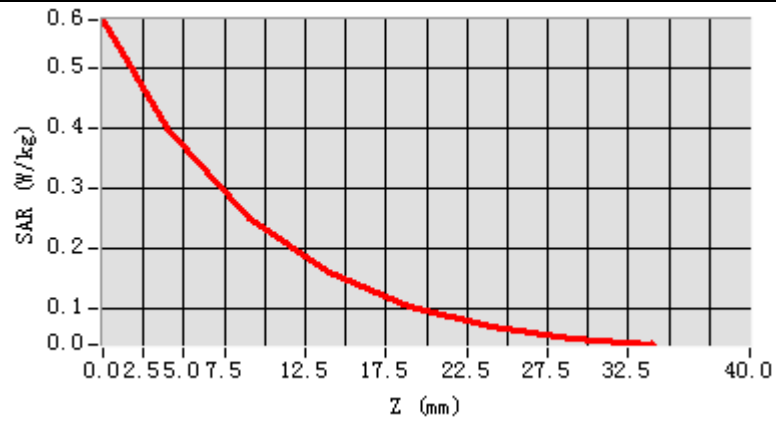

3D screen shot

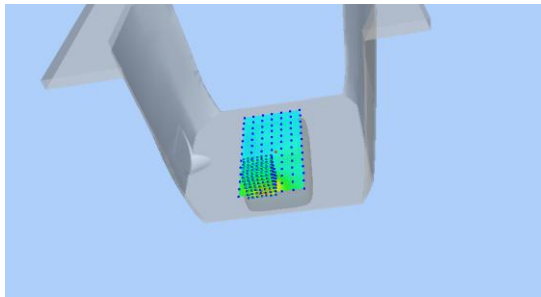

Hot spot position

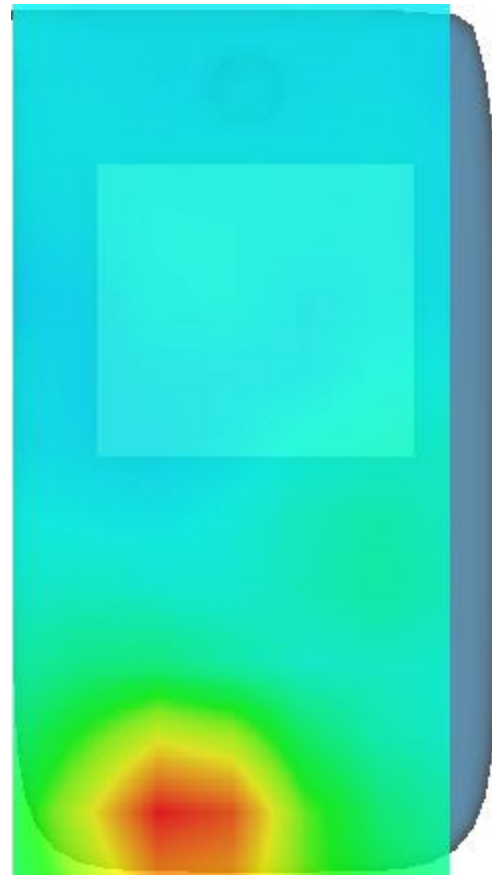

MEASUREMENT 21


A. Experimental conditions.

Area Scan	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
ZoomScan	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
Phantom	<u>Left head</u>
Device Position	<u>Cheek</u>
Band	<u>LTE band 40 B</u>
Channels	<u>Middle</u>
Signal	<u>LTE (Crest factor: 1.6)</u>


B. SAR Measurement Results

Frequency (MHz)	2352.500000
Relative permittivity (real part)	39.180123
Relative permittivity (imaginary part)	13.304633
Conductivity (S/m)	1.738841
Variation (%)	2.830000

SURFACE SAR

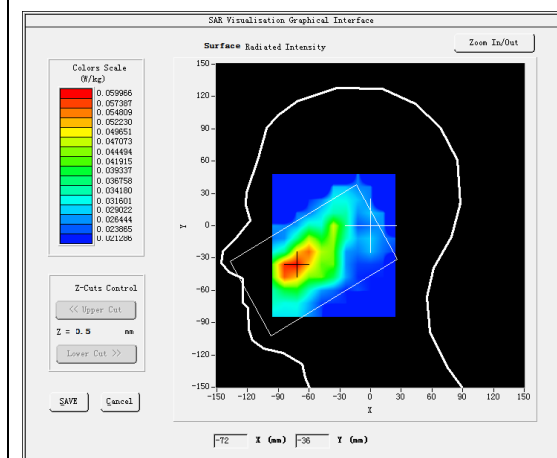



VOLUME SAR

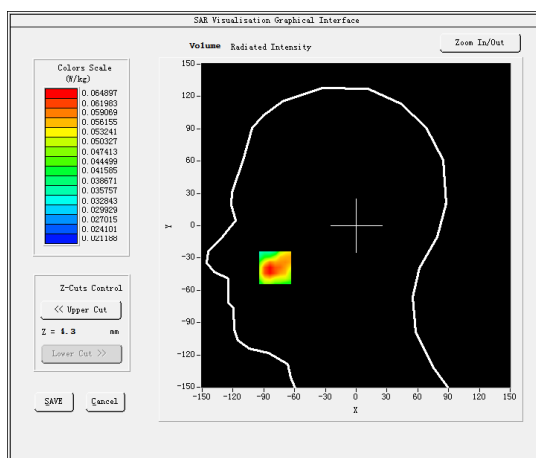

Maximum location: X=-79.00, Y=-39.00

SAR Peak: 0.09 W/kg

SAR 10g (W/Kg)	0.040672
SAR 1g (W/Kg)	0.058830

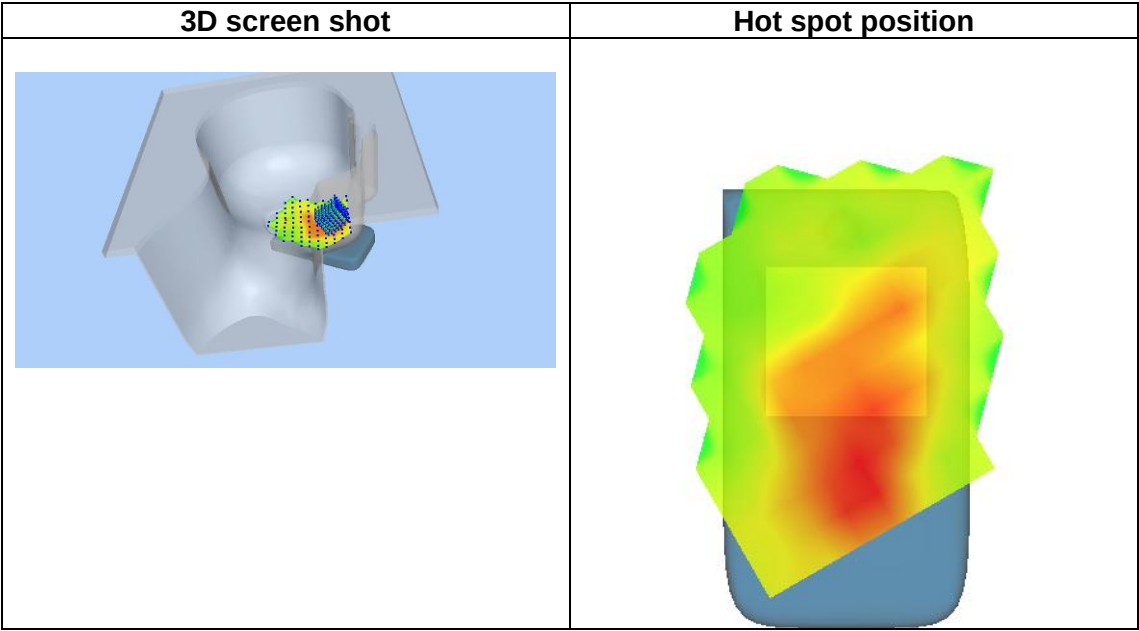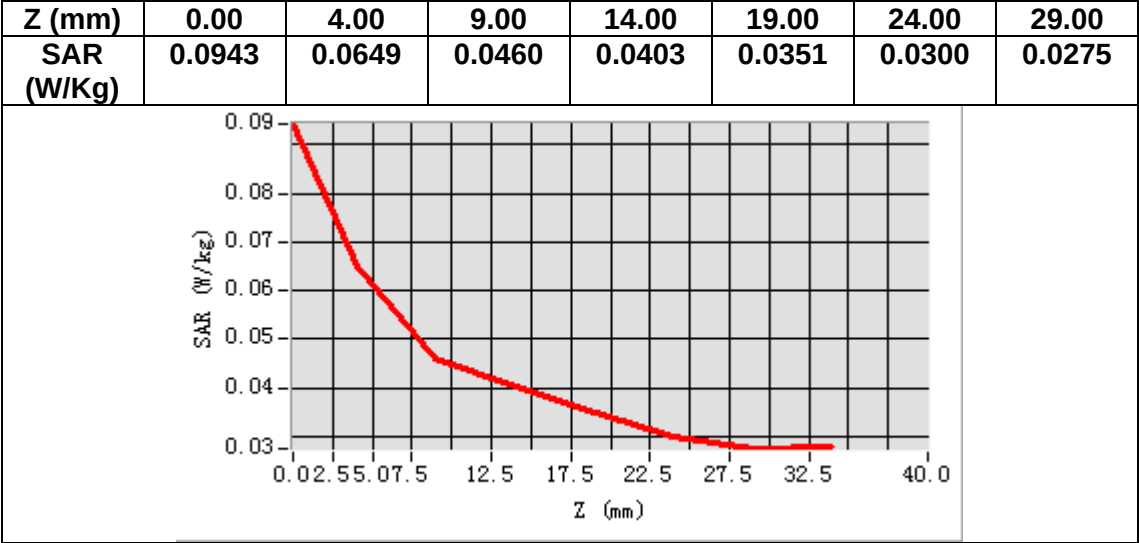

MEASUREMENT 22


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 40 B</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.6)</u>


B. SAR Measurement Results

Frequency (MHz)	2352.500000
Relative permittivity (real part)	52.144800
Relative permittivity (imaginary part)	14.161020
Conductivity (S/m)	1.850766
Variation (%)	-1.870000

SURFACE SAR

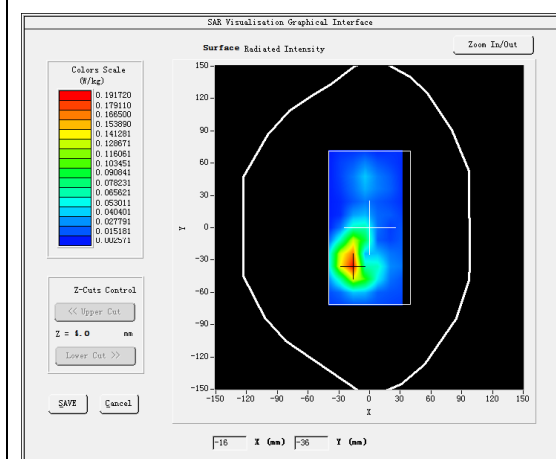



VOLUME SAR

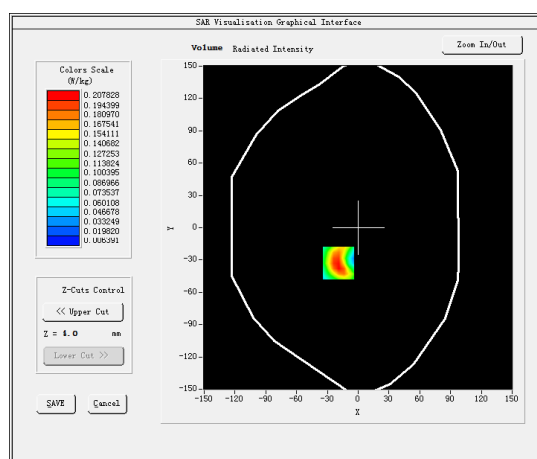

Maximum location: X=-19.00, Y=-33.00

SAR Peak: 0.36 W/kg

SAR 10g (W/Kg)	0.145138
SAR 1g (W/Kg)	0.240618

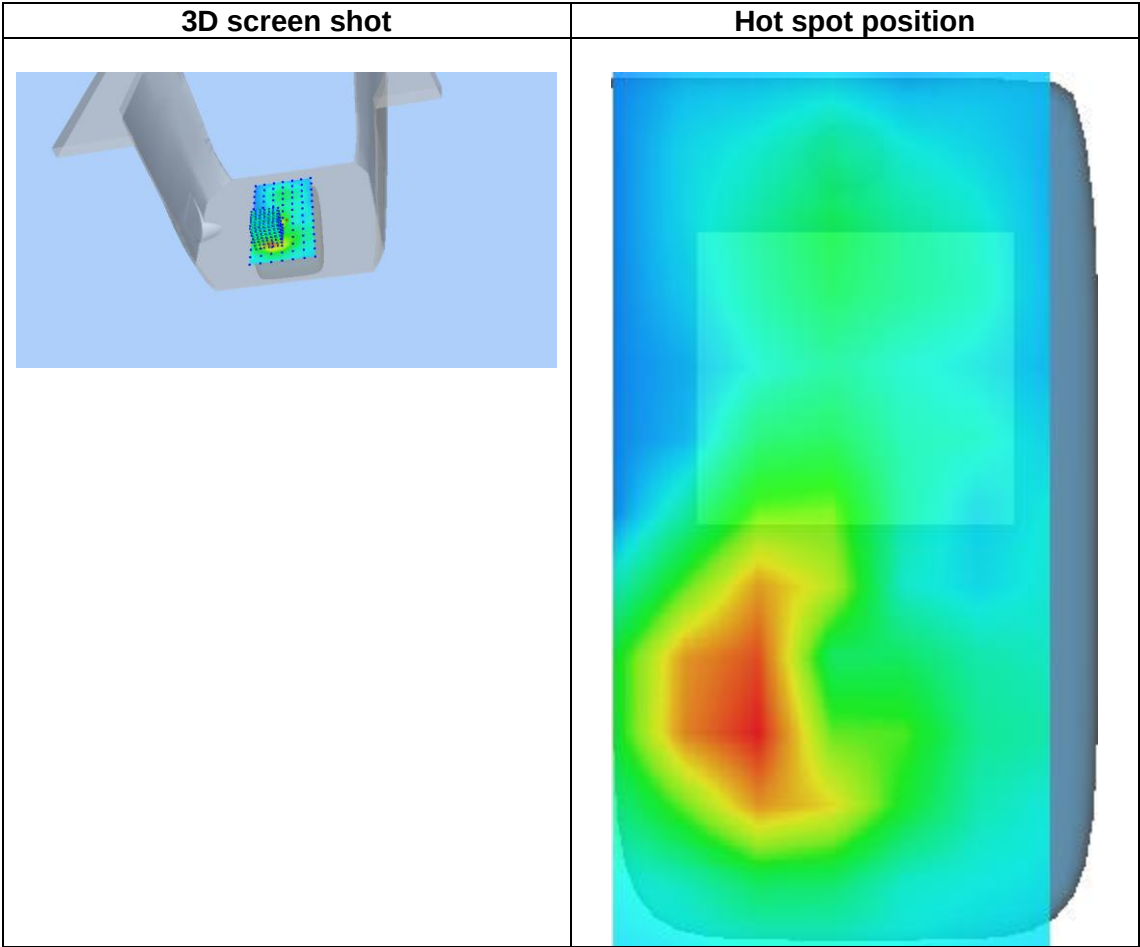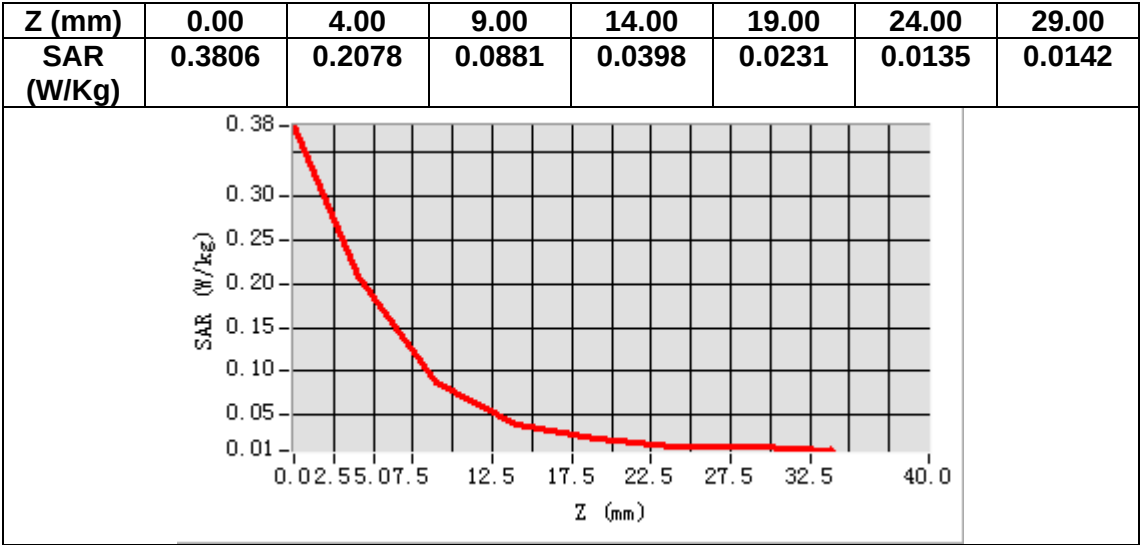

MEASUREMENT 23


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>LTE band 41</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.6)</u>


B. SAR Measurement Results

Frequency (MHz)	2593.000000
Relative permittivity (real part)	39.023986
Relative permittivity (imaginary part)	13.674760
Conductivity (S/m)	1.969925
Variation (%)	-1.880000

SURFACE SAR

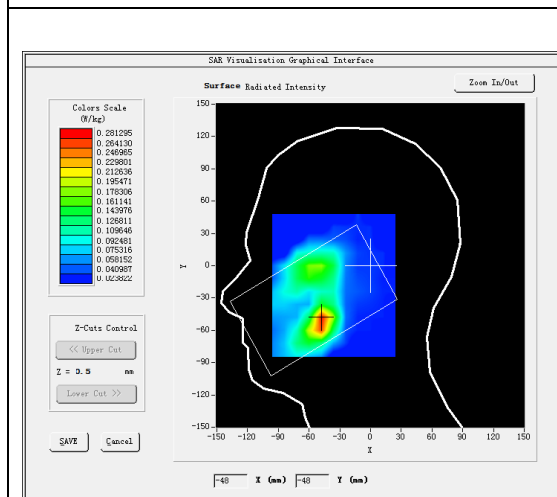




VOLUME SAR

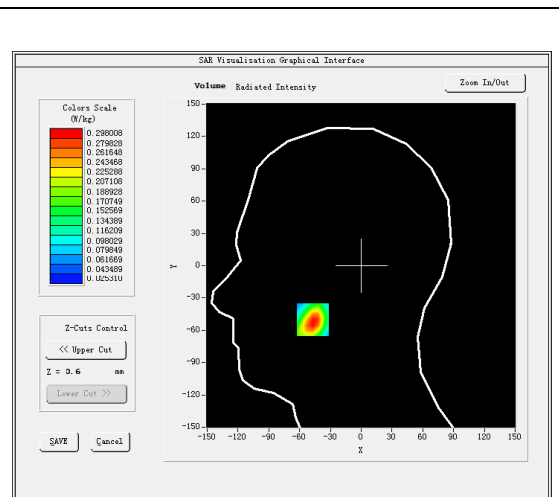

Maximum location: X=-47.00, Y=-50.00

SAR Peak: 0.45 W/kg

SAR 10g (W/Kg)	0.106518
SAR 1g (W/Kg)	0.175092

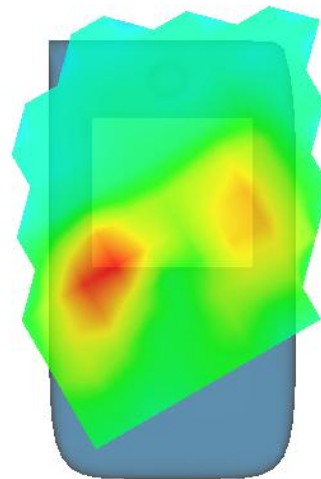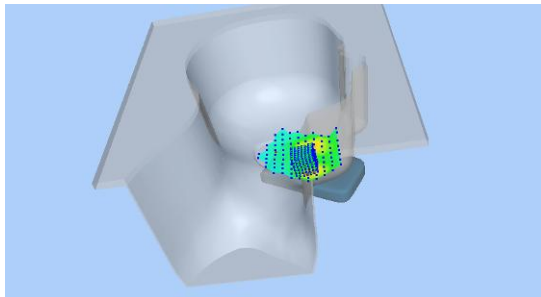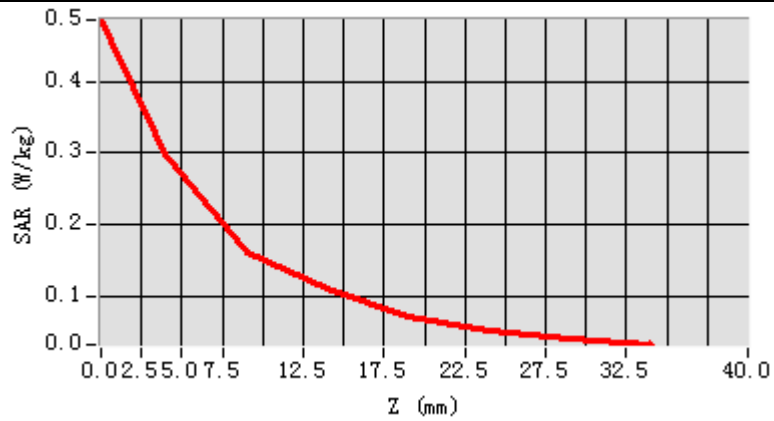

MEASUREMENT 24


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=12mm dy=12mm, h= 5.00 mm</u>
<u>ZoomScan</u>	<u>7x7x7,dx=5mm dy=5mm dz=5mm</u>
<u>Phantom</u>	<u>Validation plane</u>
<u>Device Position</u>	<u>Body</u>
<u>Band</u>	<u>LTE band 41</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>LTE (Crest factor: 1.6)</u>


B. SAR Measurement Results

Frequency (MHz)	2593.000000
Relative permittivity (real part)	53.225446
Relative permittivity (imaginary part)	15.071440
Conductivity (S/m)	2.171125
Variation (%)	-3.760000

SURFACE SAR

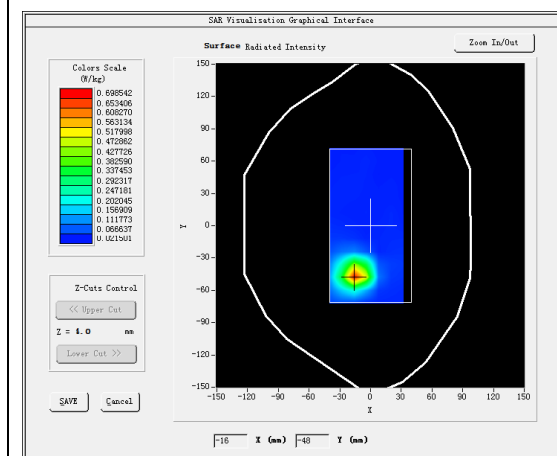



VOLUME SAR

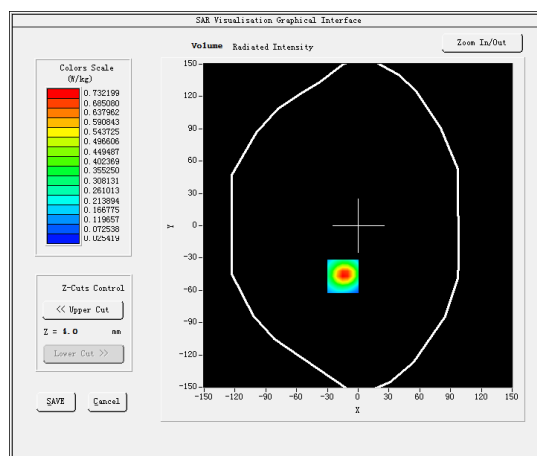

Maximum location: X=-15.00, Y=-47.00

SAR Peak: 1.14 W/kg

SAR 10g (W/Kg)	0.328279
SAR 1g (W/Kg)	0.572920

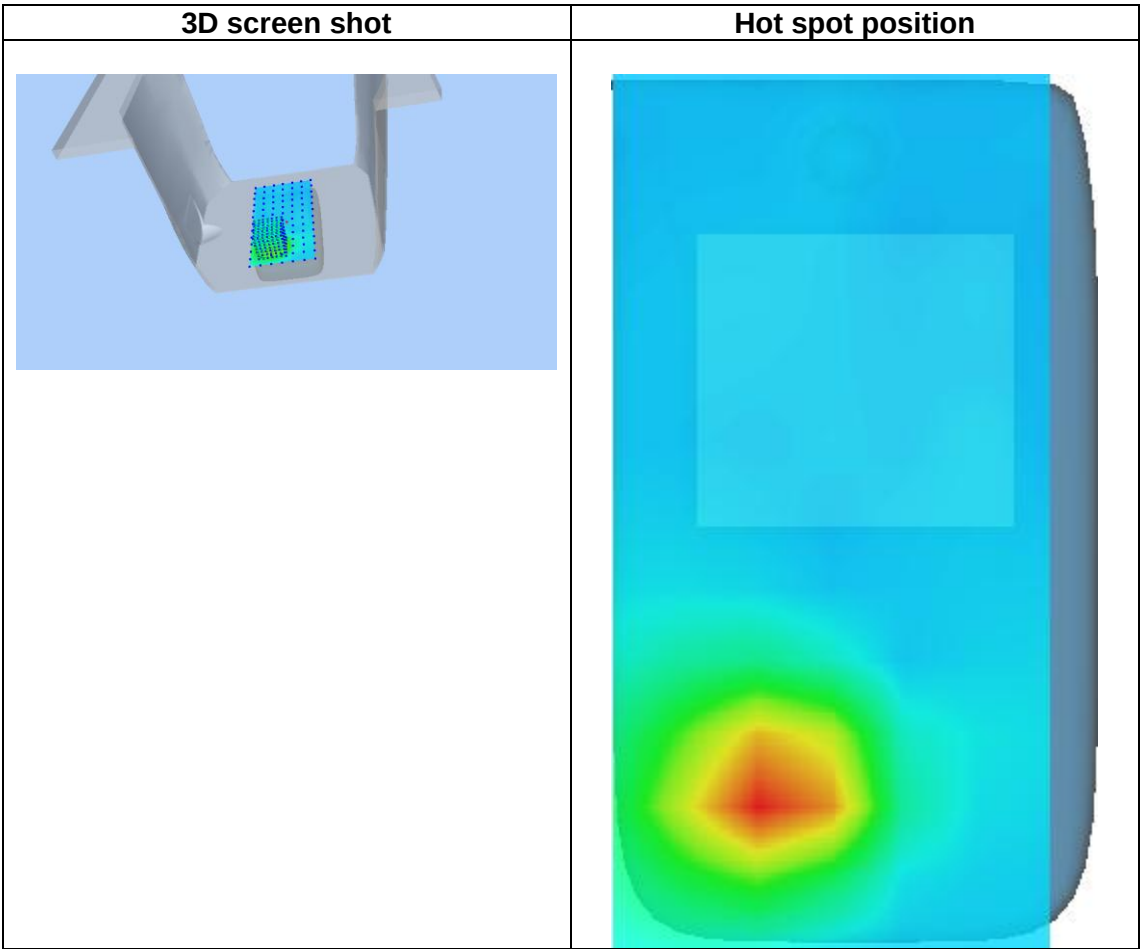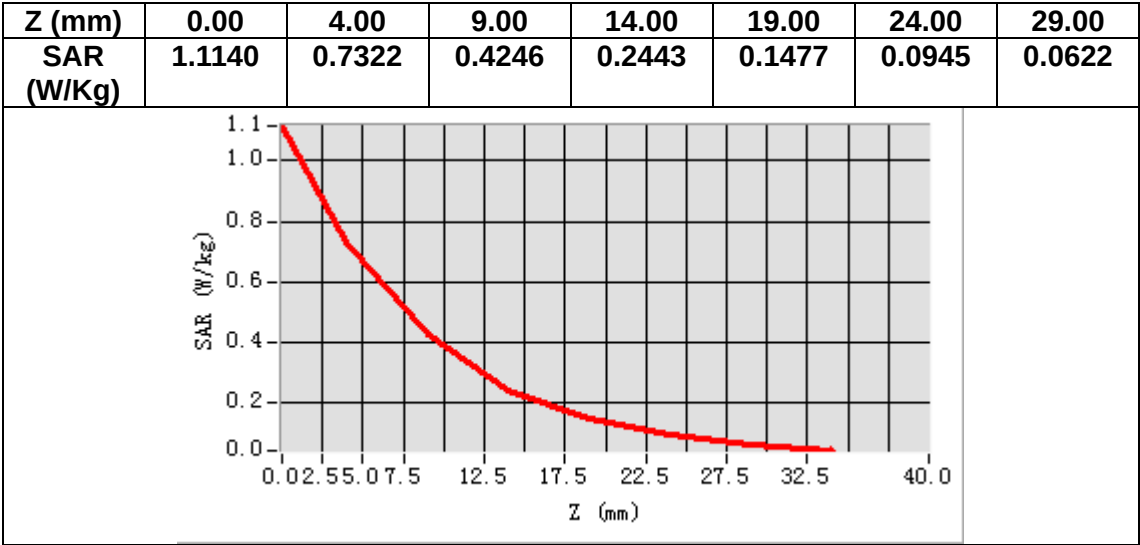

MEASUREMENT 25


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>IEEE 802.11a U-NII</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11a (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	5200.000000
Relative permittivity (real part)	35.942982
Relative permittivity (imaginary part)	15.941619
Conductivity (S/m)	4.605357
Variation (%)	-1.570000

SURFACE SAR

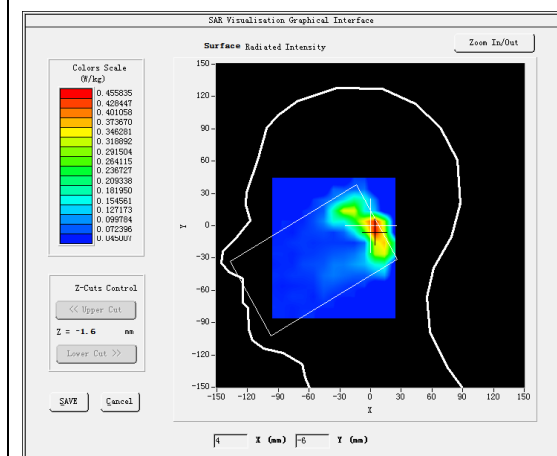

VOLUME SAR

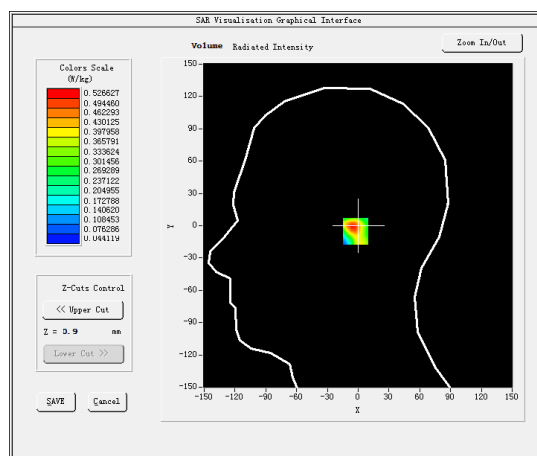




Maximum location: X=5.00, Y=-5.00

SAR Peak: 1.29 W/kg

SAR 10g (W/Kg)	0.213354
SAR 1g (W/Kg)	0.503776

Z (m m)	0.00	2.00	4.00	6.00	8.00	10.0 0	12.0 0	14.0 0	16.0 0	18.0 0	20.0 0	22.0 0
SA R (W/ Kg)	0.86 76	0.52 66	0.22 87	0.18 24	0.09 63	0.08 73	0.06 49	0.05 65	0.05 38	0.05 19	0.05 19	0.05 22

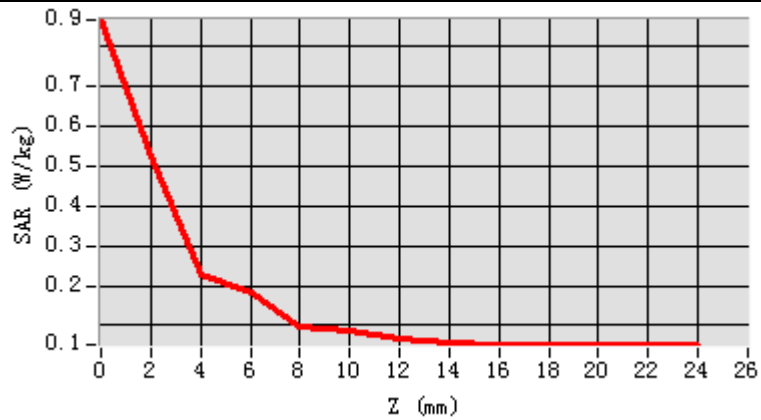

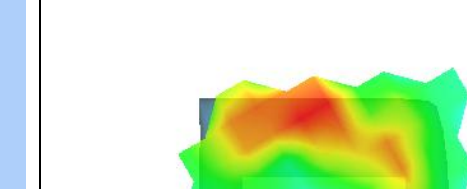3D screen shot	Hot spot position
 A 3D rendering of a hand model positioned over a grey rectangular base. A grid of small, multi-colored dots (blue, green, yellow, red) is overlaid on the palm side of the hand, representing a sensor array or data points.	 A 3D visualization showing a color-coded 'hot spot' on the back of the hand. The color scale ranges from blue (low intensity) to red (high intensity). The highest intensity (red) is concentrated in the upper central region of the back of the hand, with yellow and green areas extending downwards and outwards. The hand model is shown from a dorsal perspective, resting on a grey base.

MEASUREMENT 26


A. Experimental conditions.

<u>Area Scan</u>	<u>dx=10mm dy=10mm, h= 2.00 mm</u>
<u>ZoomScan</u>	<u>7x7x12,dx=4mm dy=4mm dz=2mm</u>
<u>Phantom</u>	<u>Left head</u>
<u>Device Position</u>	<u>Cheek</u>
<u>Band</u>	<u>IEEE 802.11a U-NII</u>
<u>Channels</u>	<u>Middle</u>
<u>Signal</u>	<u>IEEE802.11a (Crest factor: 1.0)</u>


B. SAR Measurement Results

Frequency (MHz)	5280.000000
Relative permittivity (real part)	35.940132
Relative permittivity (imaginary part)	16.296669
Conductivity (S/m)	4.780356
Variation (%)	-2.430000

SURFACE SAR

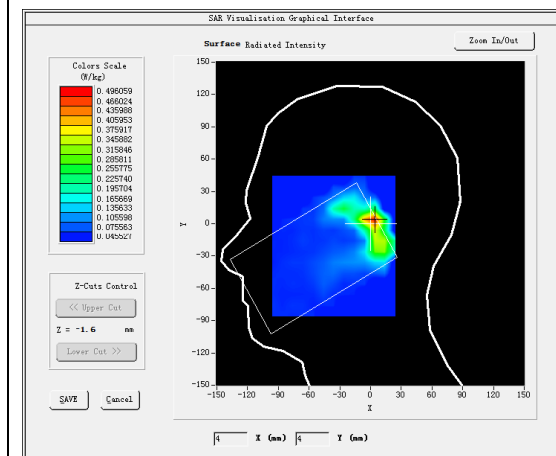

VOLUME SAR

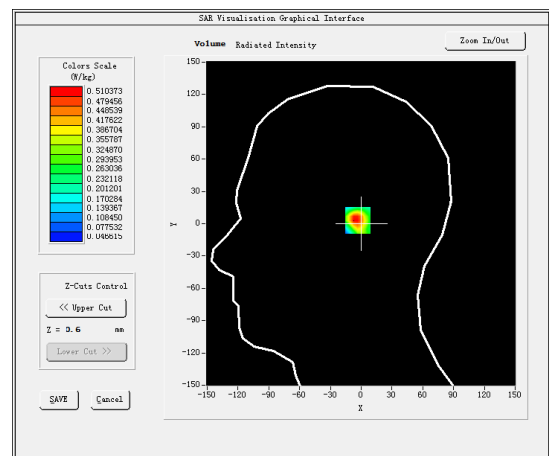

Maximum location: X=2.00, Y=3.00

SAR Peak: 1.28 W/kg

SAR 10g (W/Kg)	0.205844
SAR 1g (W/Kg)	0.506158