



FCC PART 15C TEST REPORT No. I17N00067-WLAN

for

Power Idea Technology (Shenzhen) Co., Ltd

TD-LTE digital mobile phone

Model Name: RG730

With

Hardware Version: 1.04

Software Version: RG730_US_25_V1.01_V02W_20161205

FCC ID: ZLE-RG730

IC: 11113A-RG730

Issued Date: 2017-03-08

Test Laboratory:

FCC 2.948 Listed: No.342690

IC O.A.T.S Listed: No. 21856-1

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT.

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: cttl_terminals@catr.cn, website: www.chinattl.com



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I17N00067-WLAN	Rev.0	1st edition	2017-03-08
I17N00067-WLAN	Rev.1	2st edition	2017-04-07

CONTENTS

1. TEST LABORATORY	8
1.1. TESTING LOCATION	8
1.2. TESTING ENVIRONMENT.....	8
1.3. PROJECT DATA	8
1.4. SIGNATURE	8
2. CLIENT INFORMATION.....	9
2.1. APPLICANT INFORMATION	9
2.2. MANUFACTURER INFORMATION	9
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	10
3.1. ABOUT EUT	10
3.2. INTERNAL IDENTIFICATION OF EUT	10
3.3. INTERNAL IDENTIFICATION OF AE.....	10
4. REFERENCE DOCUMENTS.....	11
4.1. DOCUMENTS SUPPLIED BY APPLICANT	11
4.2. REFERENCE DOCUMENTS FOR TESTING.....	11
5. TEST RESULTS	12
5.1. SUMMARY OF TEST RESULTS.....	12
5.2. STATEMENTS.....	12
5.3. TERMS USED IN THE RESULT TABLE	12
5.4. LABORATORY ENVIRONMENT.....	13
6. TEST FACILITIES UTILIZED	14
ANNEX A: MEASUREMENT RESULTS FOR RECEIVER	15
A.0 ANTENNA REQUIREMENT	15
A.1 MAXIMUM AVERAGE OUTPUT POWER.....	16
A.2 PEAK POWER SPECTRAL DENSITY	18
A.3 OCCUPIED 6dB BANDWIDTH	18
A.4 BAND EDGES COMPLIANCE	19
A.5 TRANSMITTER SPURIOUS EMISSION - CONDUCTED	20
A.6 TRANSMITTER SPURIOUS EMISSION - RADIATED.....	21
A.7 OCCUPIED BANDWIDTH.....	28
A.8 AC POWERLINE CONDUCTED EMISSION	29
ANNEX B: TEST GRAPHS.....	31
FIG.1 MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 1, 1Mbps).....	31
FIG.2 MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 6, 1Mbps).....	31
FIG.3 MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 11, 1Mbps).....	32
FIG.4 MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 1, 2Mbps).....	32
FIG.5 MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 6, 2Mbps).....	33

FIG.6	MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 11, 2Mbps).....	33
FIG.7	MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 1, 5.5Mbps).....	34
FIG.8	MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 6, 5.5Mbps).....	34
FIG.9	MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 11, 5.5Mbps).....	35
FIG.10	MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 1, 11Mbps).....	35
FIG.11	MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 6, 11Mbps).....	36
FIG.12	MAXIMUM AVERAGE OUTPUT POWER (802.11B, CH 11, 11Mbps).....	36
FIG.13	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1, 6Mbps).....	37
FIG.14	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6, 6Mbps).....	37
FIG.15	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11, 6Mbps).....	38
FIG.16	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1, 9Mbps).....	38
FIG.17	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6, 9Mbps).....	39
FIG.18	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11, 9Mbps).....	39
FIG.19	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1, 12Mbps).....	40
FIG.20	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6, 12Mbps).....	40
FIG.21	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11, 12Mbps).....	41
FIG.22	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1, 18Mbps).....	41
FIG.23	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6, 18Mbps).....	42
FIG.24	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11, 18Mbps).....	42
FIG.25	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1, 24Mbps).....	43
FIG.26	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6, 24Mbps).....	43
FIG.27	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11, 24Mbps).....	44
FIG.28	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1, 36Mbps).....	44
FIG.29	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6, 36Mbps).....	45
FIG.30	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11, 36Mbps).....	45
FIG.31	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1, 48Mbps).....	46
FIG.32	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6, 48Mbps).....	46
FIG.33	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11, 48Mbps).....	47
FIG.34	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 1, 54Mbps).....	47
FIG.35	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 6, 54Mbps).....	48
FIG.36	MAXIMUM AVERAGE OUTPUT POWER (802.11G, CH 11, 54Mbps).....	48
FIG.37	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHz, CH 1, MCS0).....	49
FIG.38	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHz, CH 6, MCS0).....	49
FIG.39	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHz, CH 11, MCS0).....	50
FIG.40	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHz, CH 1, MCS1).....	50
FIG.41	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHz, CH 6, MCS1).....	51
FIG.42	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHz, CH 11, MCS1).....	51
FIG.43	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHz, CH 1, MCS2).....	52
FIG.44	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHz, CH 6, MCS2).....	52
FIG.45	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHz, CH 11, MCS2).....	53
FIG.46	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHz, CH 1, MCS3).....	53
FIG.47	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHz, CH 6, MCS3).....	54
FIG.48	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHz, CH 11, MCS3).....	54
FIG.49	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHz, CH 1, MCS4).....	55

FIG.50	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHz, CH 6, MCS4).....	55
FIG.51	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHz, CH 11, MCS4).....	56
FIG.52	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHz, CH 1, MCS5).....	56
FIG.53	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHz, CH 6, MCS5).....	57
FIG.54	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHz, CH 11, MCS5).....	57
FIG.55	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHz, CH 1, MCS6).....	58
FIG.56	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHz, CH 6, MCS6).....	58
FIG.57	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHz, CH 11, MCS6).....	59
FIG.58	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHz, CH 1, MCS7).....	59
FIG.59	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHz, CH 6, MCS7).....	60
FIG.60	MAXIMUM AVERAGE OUTPUT POWER (802.11N-20MHz, CH 11, MCS7).....	60
FIG.61	POWER SPECTRAL DENSITY (802.11B, CH 1).....	61
FIG.62	POWER SPECTRAL DENSITY (802.11B, CH 6).....	61
FIG.63	POWER SPECTRAL DENSITY (802.11B, CH 11).....	62
FIG.64	POWER SPECTRAL DENSITY (802.11G, CH 1).....	62
FIG.65	POWER SPECTRAL DENSITY (802.11G, CH 6).....	63
FIG.66	POWER SPECTRAL DENSITY (802.11G, CH 11).....	63
FIG.67	POWER SPECTRAL DENSITY (802.11N-20MHz, CH 1).....	64
FIG.68	POWER SPECTRAL DENSITY (802.11N-20MHz, CH 6).....	64
FIG.69	POWER SPECTRAL DENSITY (802.11N-20MHz, CH 11).....	65
FIG.70	OCCUPIED 6dB BANDWIDTH (802.11B, CH 1).....	65
FIG.71	OCCUPIED 6dB BANDWIDTH (802.11B, CH 6).....	66
FIG.72	OCCUPIED 6dB BANDWIDTH (802.11B, CH 11).....	66
FIG.73	OCCUPIED 6dB BANDWIDTH (802.11G, CH 1).....	67
FIG.74	OCCUPIED 6dB BANDWIDTH (802.11G, CH 6).....	67
FIG.75	OCCUPIED 6dB BANDWIDTH (802.11G, CH 11).....	68
FIG.76	OCCUPIED 6dB BANDWIDTH (802.11 N-20MHz, CH 1).....	68
FIG.77	OCCUPIED 6dB BANDWIDTH (802.11 N-20MHz, CH 6).....	69
FIG.78	OCCUPIED 6dB BANDWIDTH (802.11 N-20MHz, CH 11).....	69
FIG.79	BAND EDGES (802.11B, CH 1).....	70
FIG.80	BAND EDGES (802.11B, CH 11).....	70
FIG.81	BAND EDGES (802.11G, CH 1).....	71
FIG.82	BAND EDGES (802.11G, CH 11).....	71
FIG.83	BAND EDGES (802.11 N-20MHz, CH 1).....	72
FIG.84	BAND EDGES (802.11 N-20MHz, CH 11).....	72
FIG.85	CONDUCTED SPURIOUS EMISSION (802.11B, CH1, CENTER FREQUENCY).....	73
FIG.86	CONDUCTED SPURIOUS EMISSION (802.11B, CH1, 30 MHz-1 GHz).....	73
FIG.87	CONDUCTED SPURIOUS EMISSION (802.11B, CH1, 1 GHz-10 GHz).....	74
FIG.88	CONDUCTED SPURIOUS EMISSION (802.11B, CH6, CENTER FREQUENCY).....	74
FIG.89	CONDUCTED SPURIOUS EMISSION (802.11B, CH6, 30 MHz-1 GHz).....	75
FIG.90	CONDUCTED SPURIOUS EMISSION (802.11B, CH6, 1 GHz-10 GHz).....	75
FIG.91	CONDUCTED SPURIOUS EMISSION (802.11B, CH11, CENTER FREQUENCY).....	76
FIG.92	CONDUCTED SPURIOUS EMISSION (802.11B, CH11, 30 MHz-1 GHz).....	76
FIG.93	CONDUCTED SPURIOUS EMISSION (802.11B, CH11, 1 GHz-10 GHz).....	77

FIG.94	CONDUCTED SPURIOUS EMISSION (802.11G, CH1, CENTER FREQUENCY)	77
FIG.95	CONDUCTED SPURIOUS EMISSION (802.11G, CH1, 30 MHz-1 GHz)	78
FIG.96	CONDUCTED SPURIOUS EMISSION (802.11G, CH1, 1 GHz-10 GHz).....	78
FIG.97	CONDUCTED SPURIOUS EMISSION (802.11G, CH6, CENTER FREQUENCY)	79
FIG.98	CONDUCTED SPURIOUS EMISSION (802.11G, CH6, 30 MHz-1 GHz)	79
FIG.99	CONDUCTED SPURIOUS EMISSION (802.11G, CH6, 1 GHz-10 GHz).....	80
FIG.100	CONDUCTED SPURIOUS EMISSION (802.11G, CH11, CENTER FREQUENCY).....	80
FIG.101	CONDUCTED SPURIOUS EMISSION (802.11G, CH11, 30 MHz-1 GHz)	81
FIG.102	CONDUCTED SPURIOUS EMISSION (802.11G, CH11, 1 GHz-10 GHz).....	81
FIG.103	CONDUCTED SPURIOUS EMISSION (802.11N-20MHz, CH1, CENTER FREQUENCY)	82
FIG.104	CONDUCTED SPURIOUS EMISSION (802.11N-20MHz, CH1, 30 MHz-1 GHz)	82
FIG.105	CONDUCTED SPURIOUS EMISSION (802.11N-20MHz, CH1, 1 GHz-10 GHz).....	83
FIG.106	CONDUCTED SPURIOUS EMISSION (802.11N-20MHz, CH6, CENTER FREQUENCY)	83
FIG.107	CONDUCTED SPURIOUS EMISSION (802.11N-20MHz, CH6, 30 MHz-1 GHz)	84
FIG.108	CONDUCTED SPURIOUS EMISSION (802.11N-20MHz, CH6, 1 GHz-10 GHz).....	84
FIG.109	CONDUCTED SPURIOUS EMISSION (802.11N-20MHz, CH11, CENTER FREQUENCY).....	85
FIG.110	CONDUCTED SPURIOUS EMISSION (802.11N-20MHz, CH11, 30 MHz-1 GHz)	85
FIG.111	CONDUCTED SPURIOUS EMISSION (802.11N-20MHz, CH11, 1 GHz-10 GHz).....	86
FIG.112	CONDUCTED SPURIOUS EMISSION (ALL CHANNELS, 10 GHz-26 GHz).....	86
FIG.113	RADIATED SPURIOUS EMISSION (802.11B, CH1, 1 GHz-18GHz)	87
FIG.114	RADIATED SPURIOUS EMISSION (802.11B, CH6, 9kHz-30MHz).....	87
FIG.115	RADIATED SPURIOUS EMISSION (802.11B, CH6, 30MHz-1 GHz)	88
FIG.116	RADIATED SPURIOUS EMISSION (802.11B, CH6, 1 GHz-18GHz)	88
FIG.117	RADIATED SPURIOUS EMISSION (802.11B, CH6, 18 GHz-26.5GHz)	89
FIG.118	RADIATED SPURIOUS EMISSION (802.11B, CH11, 1 GHz-18GHz)	89
FIG.119	RADIATED EMISSION POWER (802.11B, CH1, 2380GHz~2450GHz)	90
FIG.120	RADIATED EMISSION POWER (802.11B, CH11, 2450GHz~2500GHz).....	90
FIG.121	RADIATED SPURIOUS EMISSION (802.11G, CH1, 1 GHz-18 GHz)	91
FIG.122	RADIATED SPURIOUS EMISSION (802.11G, CH6, 9kHz-30MHz)	91
FIG.123	RADIATED SPURIOUS EMISSION (802.11G, CH6, 30MHz-1 GHz).....	92
FIG.124	RADIATED SPURIOUS EMISSION (802.11G, CH6, 1 GHz-18 GHz)	92
FIG.125	RADIATED SPURIOUS EMISSION (802.11G, CH6, 18 GHz-26.5 GHz).....	93
FIG.126	RADIATED SPURIOUS EMISSION (802.11G, CH11, 1 GHz-18 GHz).....	93
FIG.127	RADIATED EMISSION POWER (802.11G, CH1, 2380GHz~2450GHz).....	94
FIG.128	RADIATED EMISSION POWER (802.11G, CH11, 2450GHz~2500GHz).....	94
FIG.129	RADIATED SPURIOUS EMISSION (802.11N-20MHz, CH1, 1 GHz-18 GHz)	95
FIG.130	RADIATED SPURIOUS EMISSION (802.11N-20MHz, CH6, 9kHz-30MHz)	95
FIG.131	RADIATED SPURIOUS EMISSION (802.11N-20MHz, CH6, 30MHz-1 GHz).....	96
FIG.132	RADIATED SPURIOUS EMISSION (802.11N-20MHz, CH6, 1 GHz-18 GHz)	96
FIG.133	RADIATED SPURIOUS EMISSION (802.11N-20MHz, CH6, 18 GHz-26.5 GHz)	97
FIG.134	RADIATED SPURIOUS EMISSION (802.11N-20MHz, CH11, 1 GHz-18 GHz).....	97
FIG.135	RADIATED EMISSION POWER (802.11N-20MHz, CH1, 2380GHz~2450GHz).....	98
FIG.136	RADIATED EMISSION POWER (802.11N-20MHz, CH11, 2450GHz~2500GHz).....	98
FIG.137	OCCUPIED BANDWIDTH (802.11B, CH 1).....	99

FIG.138	OCCUPIED BANDWIDTH (802.11B, CH 6).....	99
FIG.139	OCCUPIED BANDWIDTH (802.11B, CH 11).....	100
FIG.140	OCCUPIED BANDWIDTH (802.11G, CH 1).....	100
FIG.141	OCCUPIED BANDWIDTH (802.11G, CH 6).....	101
FIG.142	OCCUPIED BANDWIDTH (802.11G, CH 11).....	101
FIG.143	OCCUPIED BANDWIDTH (802.1111N-20MHZ, CH 1).....	102
FIG.144	OCCUPIED BANDWIDTH (802.1111N-20MHZ, CH 6).....	102
FIG.145	OCCUPIED BANDWIDTH (802.1111N-20MHZ, CH 11).....	103
FIG.146	AC POWERLINE CONDUCTED EMISSION (TRAFFIC, AE1).....	104
FIG.147	AC POWER LINE CONDUCTED EMISSION (IDLE, AE1).....	105
FIG.148	AC POWERLINE CONDUCTED EMISSION (TRAFFIC, AE1).....	106
FIG.149	AC POWER LINE CONDUCTED EMISSION (IDLE, AE1).....	107
ANNEX C: PERSONS INVOLVED IN THIS TESTING		108



1. Test Laboratory

1.1. Testing Location

Location: CTTL(South Branch)

Address: TCL International E city, No. 1001, Zhongshanyuan Road, Nanshan
District, Shenzhen, Guangdong, China 518000

1.2. Testing Environment

Normal Temperature: 15-35℃

Relative Humidity: 20-75%

1.3. Project data

Testing Start Date: 2017-01-19

Testing End Date: 2017-03-03

1.4. Signature

Lin Kanfeng

(Prepared this test report)

Tang Weisheng

(Reviewed this test report)

Zhang Bojun

(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: Power Idea Technology (Shenzhen) Co., Ltd.
4th Floor, A Section , Languang Science & technology Building , No.7
Address: Xinxu RD , Hi-Tech Industrial Park North , Nanshan District ,
Shenzhen , P.R.C.
City: Shenzhen
Postal Code: /
Country: China
Telephone: 0755-86220211
Fax: /

2.2. Manufacturer Information

Company Name: Power Idea Technology (Shenzhen) Co., Ltd.
4th Floor, A Section , Languang Science & technology Building , No.7
Address: Xinxu RD , Hi-Tech Industrial Park North , Nanshan District ,
Shenzhen , P.R.C.
City: Shenzhen
Postal Code: /
Country: China
Telephone: 0755-86220211
Fax: /

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	TD-LTE digital mobile phone
Model Name	RG730
Market Name	/
RF Protocol	IEEE 802.11b/g/n20
Operating Frequency	2412MHz~2462MHz
Antenna	Integrated
Power Supply	3.7V DC by Battery
FCC ID	ZLE-RG730
IC number	11113A-RG730

3.2. Internal Identification of EUT

EUT ID*	IMEI	HW Version	SW Version	Receive Date
EUT1	867453021949733	1.04	RG730_US_25_V1.01 _V02W_20161205	2017-01-19

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE

AE ID*	Description	SN
AE1	Power Supply	/

AE1

Model	HKC0055010-2D
Manufacturer	SHENZHEN HUNTKEY ELECTRIC CO., LTD

*AE ID: is used to identify the test sample in the lab internally.

4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz	Nov,2015
ANSI C63.10	American National Standard for Testing Unlicensed Wireless Devices	Jun,2013
RSS-Gen	Spectrum Management and Telecommunications Radio Standards Specification General Requirements for Compliance of Radio Apparatus	Issue 4 Nov,2014
RSS-247	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and License-Exempt Local Area Network (LE-LAN) Devices	Issue 1 May,2015

5. Test Results

5.1. Summary of Test Results

No	Test cases	Sub-clause of Part15C	Sub-clause of IC	Verdict
0	Antenna Requirement	15.203	/	P
1	Maximum Peak Output Power	15.247 (b)	RSS-247 Issue1 5.4	P
2	Peak Power Spectral Density	15.247 (e)	RSS-247 Issue1 5.2	P
3	Occupied 6dB Bandwidth	15.247 (a)	RSS-247 Issue1 5.2	P
4	Band Edges Compliance	15.247 (d)	RSS-247 Issue1 5.5	P
5	Transmitter Spurious Emission - Conducted	15.247 (d)	RSS-247 Issue1 5.5/RSS-Gen 6.13	P
6	Transmitter Spurious Emission - Radiated	15.247, 15.205, 15.209	RSS-247 Issue1 5.5/RSS-Gen 6.13	P
7	Occupied Bandwidth	/	RSS-Gen Issue4 6.6	P
8	AC Powerline Conducted Emission	15.107, 15.207	RSS-Gen Issue4 8.8	P

Use the EUT inside MTK Engineering mode to control the transmitting signal.

See **ANNEX B** and **ANNEX C** for details.

5.2. Statements

CTTL has evaluated the test cases requested by the applicant/manufacture as listed in section 5.1 of this report, for the EUT specified in section 3, according to the standards or reference documents listed in section 4.2.

5.3. Terms used in the result table

Terms used in Verdict column

P	Pass
NA	Not Available
F	Fail

Abbreviations

AC	Alternating Current
AFH	Adaptive Frequency Hopping
BW	Band Width
E.I.R.P.	equivalent isotropic radiated power
ISM	Industrial, Scientific and Medical
R&TTE	Radio and Telecommunications Terminal Equipment
RF	Radio Frequency
Tx	Transmitter

5.4. Laboratory Environment

Semi-anechoic chamber did not exceed following limits along the EMC testing

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4Ω
Normalised site attenuation (NSA)	< ±4dB, 3m/10m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

Shielded room did not exceed following limits along the EMC testing

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω

Fully-anechoic chamber did not exceed following limits along the EMC testing

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4Ω
Voltage Standing Wave Ratio (VSWR)	≤6dB, from 1 to 18 GHz, 3m distance

6. Test Facilities Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date	Calibration Period
1	Vector Signal Analyzer	FSV40	100903	Rohde & Schwarz	2017-03-21	1 year

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date	Calibration Period
1	Test Receiver	ESCI	100701	R&S	2017-08-09	1 year
2	Loop Antenna	HLA6120	35779	TESEQ	2019-05-02	3 years
3	BiLog Antenna	VULB9163	9163 330	Schwarzbeck	2017-04-22	3 years
4	Horn Antenna	3117	00066585	ETS-Lindgren	2019-03-05	3 years
5	Universal Radio Communication Tester	CMW270	100540	Rohde & Schwarz	2017-04-13	1 year
6	Spectrum Analyzer	FSP 40	100378	R&S	2017-12-15	1 year
7	Chamber	FACT5-2.0	4166	ETS-Lindgren	2018-05-13	3 years
8	Antenna	3160-09	LM4214/0011 8383	ETS-Lindgren	2018.07.14	3 years

Software

No.	Equipment	Version
1	TechMgr Software	1.9.1
2	EMC32	8.53.0
3	EMC32	10.01.00

Anechoic chamber

Fully anechoic chamber by ETS-Lindgren


ANNEX A: MEASUREMENT RESULTS FOR RECEIVER

A.0 Antenna requirement

Measurement Limit:

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

**Conclusion: The Directional gains of antenna used for transmitting is 0.32dBi.
The RF transmitter uses an integrate antenna without connector.**



Standard	Limit (dBm)
FCC CRF Part 15.247(b)(1) & RSS-247 Issue1 5.4	< 30

Spectrum

Ref Level 20.00 dBm RBW 1 MHz
 Att 40 dB SWT 20 ms VBW 3 MHz
 SGL TDF

● 1Pk Max

CF 2.412 GHz 691 pts 2.0 ms/

No	Type	Ref	Trc	Stimulus	Response	Function	Function Result
1	N1		1	1.5072 ms	9.43 dBm		
2	D1	N1	1	8.4058 ms	-0.15 dB		
3	D2	N1	1	8.5507 ms	0.06 dB		

Ready 27.02.2017 14:55:11

Date: 27.FEB.2017 14:55:11

Mode	Data Rate (Mbps)	Test Result (dBm)					
		2412MHz (Ch1)		2437MHz (Ch6)		2462 MHz (Ch11)	
802.11b	1	Fig.1	15.03	Fig.2	15.65	Fig.3	14.98
	2	Fig.4	15.00	Fig.5	15.60	Fig.6	14.93
	5.5	Fig.7	15.13	Fig.8	15.63	Fig.9	15.01
	11	Fig.10	15.14	Fig.11	15.53	Fig.12	14.98
802.11g	6	Fig.13	10.85	Fig.14	12.23	Fig.15	10.55
	9	Fig.16	10.86	Fig.17	12.15	Fig.18	10.53
	12	Fig.19	11.01	Fig.20	12.25	Fig.21	10.88
	18	Fig.22	11.08	Fig.23	12.07	Fig.24	10.90
	24	Fig.25	10.96	Fig.26	11.80	Fig.27	10.80

	36	Fig.28	10.94	Fig.29	11.70	Fig.30	10.85
	48	Fig.31	10.94	Fig.32	12.11	Fig.33	10.78
	54	Fig.34	10.90	Fig.35	12.08	Fig.36	10.83

802.11n-20MHz mode

Mode	Data Rate (MCS Index)	Test Result (dBm)					
		2412MHz (Ch1)		2437MHz (Ch6)		2462 MHz (Ch11)	
802.11n (20MHz)	MCS0	Fig.37	10.24	Fig.38	10.39	Fig.39	9.76
	MCS1	Fig.40	10.28	Fig.41	10.50	Fig.42	9.67
	MCS2	Fig.43	10.34	Fig.44	10.49	Fig.45	9.74
	MCS3	Fig.46	10.27	Fig.47	10.33	Fig.48	9.69
	MCS4	Fig.49	10.19	Fig.50	10.40	Fig.51	9.84
	MCS5	Fig.52	10.36	Fig.53	10.66	Fig.54	9.94
	MCS6	Fig.55	10.34	Fig.56	10.67	Fig.57	10.01
	MCS7	Fig.58	10.35	Fig.59	10.59	Fig.60	10.05

*The data rate 5.5Mbps, 12Mbps and MCS6 are selected as worst condition, the following cases and **test graphs** are performed with this condition.

See ANNEX B for test graphs.

Conclusion: PASS

A.2 Peak Power Spectral Density

Measurement Limit:

Standard	Limit
FCC CRF Part 15.247(e) & RSS-247 Issue1 5.2	< 8 dBm/3 kHz

Measurement Results:

802.11b/g mode

Mode	Channel	Peak Power Spectral Density(dBm)		Conclusion
802.11b	1	Fig.61	-4.23	P
	6	Fig.62	-4.56	P
	11	Fig.63	-6.42	P
802.11g	1	Fig.64	-10.96	P
	6	Fig.65	-10.52	P
	11	Fig.66	-12.13	P

802.11n-20MHz mode

Mode	Channel	Peak Power Spectral Density(dBm)		Conclusion
802.11n (20MHz)	1	Fig.67	-13.12	P
	6	Fig.68	-12.22	P
	11	Fig.69	-12.67	P

See ANNEX B for test graphs.

Conclusion: PASS

A.3 Occupied 6dB Bandwidth

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.247 (a) & RSS-247 Issue1 5.2	≥ 500

Measurement Result:

802.11b/g mode

Mode	Channel	Test Results (kHz)		conclusion
802.11b	1	Fig.70	9050	P
	6	Fig.71	9550	P
	11	Fig.72	9550	P
802.11g	1	Fig.73	15450	P
	6	Fig.74	15700	P
	11	Fig.75	15700	P

802.11n-20MHz mode

Mode	Channel	Test Results (kHz)		conclusion
802.11n (20MHz)	1	Fig.76	17550	P
	6	Fig.77	17550	P
	11	Fig.78	16400	P

See ANNEX B for test graphs.

Conclusion: PASS

A.4 Band Edges Compliance

Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d) & RSS-247 Issue1 5.5	> 30

Measurement Result:

802.11b/g mode

Mode	Channel	Test Results	Conclusion
802.11b	1	Fig.79	P
	11	Fig.80	P
802.11g	1	Fig.81	P
	11	Fig.82	P

802.11n-20MHz mode

Mode	Channel	Test Results	Conclusion
802.11n (20MHz)	1	Fig.83	P
	11	Fig.84	P

See ANNEX B for test graphs.

Conclusion: PASS

A.5 Transmitter Spurious Emission - Conducted

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d) & RSS-247 Issue1 5.5/RSS-Gen 6.13	30dB below peak output power in 100 kHz bandwidth

Measurement Results:

802.11b/g mode

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11b	1	2.412 GHz	Fig.85	P
		30 MHz-1 GHz	Fig.86	P
		1GHz-10GHz	Fig.87	P
	6	2.437 GHz	Fig.88	P
		30 MHz-1 GHz	Fig.89	P
		1GHz-10GHz	Fig.90	P
	11	2.462 GHz	Fig.91	P
		30 MHz-1 GHz	Fig.92	P
		1GHz-10GHz	Fig.93	P
802.11g	1	2.412 GHz	Fig.94	P
		30 MHz-1 GHz	Fig.95	P
		1GHz-10GHz	Fig.96	P
	6	2.437 GHz	Fig.97	P
		30 MHz-1 GHz	Fig.98	P
		1GHz-10GHz	Fig.99	P
	11	2.462 GHz	Fig.100	P
		30 MHz-1 GHz	Fig.101	P
		1GHz-10GHz	Fig.102	P

802.11n-20MHz mode

802.11n (20MHz)	1	2.412 GHz	Fig.103	P
		30 MHz-1 GHz	Fig.104	P
		1GHz-10GHz	Fig.105	P
	6	2.437 GHz	Fig.106	P
		30 MHz-1 GHz	Fig.107	P
		1GHz-10GHz	Fig.108	P
	11	2.462 GHz	Fig.109	P
		30 MHz-1 GHz	Fig.110	P
		1GHz-10GHz	Fig.111	P
/	All channels	10GHz-26GHz	Fig.112	P

See ANNEX B for test graphs.

Conclusion: PASS

A.6 Transmitter Spurious Emission - Radiated

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209 & RSS-247 Issue1 5.5/RSS-Gen 6.13	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency of emission (MHz)	Field strength($\mu\text{V}/\text{m}$)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Condition:

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	120kHz/300kHz	5
1000-4000	1MHz/3MHz	15
4000-18000	1MHz/3MHz	40
18000-26500	1MHz/3MHz	20

Note:

According to the performance evaluation, the radiated emission margin of EUT is over 20dB in the band below 30MHz. Therefore, the measurement starts from 30MHz to tenth harmonic.

The measurement results include the horizontal polarization and vertical polarization measurements.

Measurement Results:

802.11b/g mode

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	1	1 GHz ~18 GHz	Fig.113	P
	6	9 kHz ~30 MHz	Fig.114	P
		30 MHz ~1 GHz	Fig.115	P
		1 GHz ~18 GHz	Fig.116	P
		18 GHz ~26.5 GHz	Fig.117	P
	11	1 GHz ~18 GHz	Fig.118	P
	Power(CH1)	2.38 GHz ~ 2.45 GHz	Fig.119	P
Power(CH11)	2.45 GHz ~ 2.5 GHz	Fig.120	P	
802.11g	1	1 GHz ~18 GHz	Fig.121	P
	6	9 kHz ~30 MHz	Fig.122	P
		30 MHz ~1 GHz	Fig.123	P
		1 GHz ~18 GHz	Fig.124	P
		18 GHz ~26.5 GHz	Fig.125	P
	11	1 GHz ~18 GHz	Fig.126	P
	Power(CH1)	2.38 GHz ~ 2.45 GHz	Fig.127	P
	Power(CH11)	2.45 GHz ~ 2.5 GHz	Fig.128	P

802.11n-20MHz mode

802.11n-20 MHz	1	1 GHz ~18 GHz	Fig.129	P
	6	9 kHz ~30 MHz	Fig.130	P
		30 MHz ~1 GHz	Fig.131	P
		1 GHz ~18 GHz	Fig.132	P
		18 GHz ~26.5 GHz	Fig.133	P
	11	1 GHz ~18 GHz	Fig.134	P
	Power(CH1)	2.38 GHz ~ 2.45 GHz	Fig.135	P
	Power(CH11)	2.45 GHz ~ 2.5 GHz	Fig.136	P

802.11b CH1 (1-18GHz)

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Corr. (dB)	Pol
14544.000000	55.46	74.00	18.54	11.9	V
14720.500000	56.23	74.00	17.77	11.9	V
15724.000000	56.88	74.00	17.12	12.7	H
16208.000000	56.59	74.00	17.41	13.1	H
16628.000000	57.19	74.00	16.81	13.8	V
17282.000000	56.99	74.00	17.01	13.9	V

Frequency (MHz)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Corr. (dB)	Pol
14526.500000	43.43	54.00	10.57	11.8	V
15153.000000	44.07	54.00	9.93	12.1	V
15688.000000	45.41	54.00	8.59	12.7	H
16235.500000	45.19	54.00	8.81	13.1	V
16728.000000	45.72	54.00	8.28	13.8	V
17354.500000	45.24	54.00	8.76	14.0	H

802.11b CH 6(1-18GHz)

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Corr. (dB)	Pol
7325.125000	55.87	74.00	18.13	6.4	V
15158.000000	55.72	74.00	18.28	12.1	H
15684.500000	57.30	74.00	16.70	12.6	V
16189.000000	58.14	74.00	15.86	13.1	H
16772.500000	58.59	74.00	15.41	13.9	H
17262.000000	57.67	74.00	16.33	13.9	H

Frequency (MHz)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Corr. (dB)	Pol
7325.125000	50.24	54.00	3.76	6.4	V
15180.000000	44.28	54.00	9.72	12.2	H
15670.000000	45.70	54.00	8.30	12.6	H
16222.500000	45.96	54.00	8.04	13.1	V
16768.000000	46.59	54.00	7.41	13.9	V
17286.500000	46.11	54.00	7.89	13.9	H

802.11b CH 11(1GHz-18GHz)

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Corr. (dB)	Pol
12190.500000	52.33	74.00	21.67	10.3	H
13667.000000	53.26	74.00	20.74	11.2	V
15136.500000	55.64	74.00	18.36	12.1	V
15680.500000	57.09	74.00	16.91	12.6	V
16342.500000	56.76	74.00	17.24	13.4	H
17308.000000	57.66	74.00	16.34	13.9	H

Frequency (MHz)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Corr. (dB)	Pol
13089.500000	39.89	54.00	14.11	11.1	H
15123.000000	44.06	54.00	9.94	12.1	H
15769.000000	45.41	54.00	8.59	12.8	V
16225.000000	45.57	54.00	8.43	13.1	V
16747.000000	46.01	54.00	7.99	13.9	H
17342.000000	45.47	54.00	8.53	14.0	V

802.11g CH1 (1G-18GHz)

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Corr. (dB)	Pol
12679.500000	52.40	74.00	21.60	10.7	H
13698.500000	54.25	74.00	19.75	11.2	V
15168.000000	56.64	74.00	17.36	12.1	H
16179.500000	57.59	74.00	16.41	13.1	H
16784.500000	58.20	74.00	15.80	13.9	V
17376.500000	58.16	74.00	15.84	14.0	H

Frequency (MHz)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Corr. (dB)	Pol
13183.500000	40.45	54.00	13.55	11.2	H
13941.000000	42.26	54.00	11.74	10.8	V
15691.500000	45.58	54.00	8.42	12.7	H
16209.500000	46.05	54.00	7.95	13.1	H
16793.000000	46.65	54.00	7.35	13.9	V
17266.000000	46.15	54.00	7.85	13.9	V

802.11g CH6 (1GHz-18GHz)

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Corr. (dB)	Pol
13656.000000	53.99	74.00	20.01	11.1	V
14142.500000	54.60	74.00	19.40	11.2	H
15109.000000	55.82	74.00	18.18	12.1	V
15667.000000	56.82	74.00	17.18	12.6	V
16195.500000	57.22	74.00	16.78	13.1	H
17271.500000	57.37	74.00	16.63	13.9	V

Frequency (MHz)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Corr. (dB)	Pol
13934.500000	41.85	54.00	12.15	10.8	H
15122.000000	44.10	54.00	9.90	12.1	H
15746.500000	45.45	54.00	8.55	12.8	V
16212.000000	45.49	54.00	8.51	13.1	H
16730.500000	46.15	54.00	7.85	13.8	V
17321.000000	45.76	54.00	8.24	14.0	V

802.11g CH11 (1GHz-18GHz)

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Corr. (dB)	Pol
13699.500000	53.66	74.00	20.34	11.2	V
14544.000000	55.07	74.00	18.93	11.9	V
15157.000000	55.41	74.00	18.59	12.1	H
16278.500000	57.19	74.00	16.81	13.3	V
16778.500000	57.39	74.00	16.61	13.9	H
17324.000000	57.43	74.00	16.57	14.0	V

Frequency (MHz)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Corr. (dB)	Pol
13931.500000	41.96	54.00	12.04	10.8	H
15127.500000	44.15	54.00	9.85	12.1	H
15748.500000	45.30	54.00	8.70	12.8	H
16209.000000	45.44	54.00	8.56	13.1	V
16791.000000	45.82	54.00	8.18	13.9	V
17272.000000	45.64	54.00	8.36	13.9	H

802.11n-20MHz CH1 (1GHz-18GHz)

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Corr. (dB)	Pol
14058.000000	55.01	74.00	18.99	11.0	V
15081.000000	56.53	74.00	17.47	12.1	H
15763.500000	57.06	74.00	16.94	12.8	V
16237.500000	57.55	74.00	16.45	13.1	V
16777.000000	57.73	74.00	16.27	13.9	H
17452.500000	58.44	74.00	15.56	14.0	V

Frequency (MHz)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Corr. (dB)	Pol
14536.000000	43.43	54.00	10.57	11.9	V
15170.500000	44.13	54.00	9.87	12.1	V
15753.000000	45.37	54.00	8.63	12.8	H
16209.500000	45.68	54.00	8.32	13.1	H
16770.000000	46.09	54.00	7.91	13.9	V
17285.000000	45.70	54.00	8.30	13.9	V

802.11n-20MHz CH6 (1GHz-18GHz)

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Corr. (dB)	Pol
14536.000000	55.26	74.00	18.74	11.9	V
15078.000000	56.10	74.00	17.90	12.1	H
15760.500000	57.16	74.00	16.84	12.8	H
16187.500000	57.45	74.00	16.55	13.1	H
16707.500000	58.69	74.00	15.31	13.8	H
17341.500000	57.83	74.00	16.17	14.0	V

Frequency (MHz)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Corr. (dB)	Pol
13933.000000	42.38	54.00	11.62	10.8	V
15154.000000	44.12	54.00	9.88	12.1	H
15674.500000	45.50	54.00	8.50	12.6	V
16236.000000	45.87	54.00	8.13	13.1	V
16791.500000	46.72	54.00	7.28	13.9	V
17293.500000	46.41	54.00	7.59	13.9	V

802.11n-20MHz CH11 (1GHz-18GHz)

Frequency (MHz)	MaxPeak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Corr. (dB)	Pol
13653.000000	53.25	74.00	20.75	11.1	H
15138.500000	55.83	74.00	18.17	12.1	H
15823.000000	56.82	74.00	17.18	12.8	V
16225.500000	56.82	74.00	17.18	13.1	V
16781.000000	57.02	74.00	16.98	13.9	V
17401.000000	57.26	74.00	16.74	14.0	H

Frequency (MHz)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Corr. (dB)	Pol
14533.000000	43.43	54.00	10.57	11.9	H
15149.500000	44.08	54.00	9.92	12.1	V
15787.000000	45.25	54.00	8.75	12.8	H
16222.500000	45.28	54.00	8.72	13.1	H
16783.000000	46.14	54.00	7.86	13.9	H
17267.000000	45.41	54.00	8.59	13.9	V

See ANNEX B for test graphs.

Conclusion: PASS

Note:

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the Antenna Factor, the gain of the preamplifier, the cable loss. P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

Result = $P_{Mea} + A_{Rpl} = P_{Mea} + \text{Cable Loss} + \text{Antenna Factor} - \text{Gain of the preamplifier}$

A.7 Occupied Bandwidth

Measurement Limit:

Standard	Limit
RSS-Gen Issue4 6.6	/

Measurement Result:

802.11b/g mode

Mode	Channel	Test Results (kHz)		conclusion
802.11b	1	Fig.137	12520	P
	6	Fig.138	12600	P
	11	Fig.139	12960	P
802.11g	1	Fig.140	16520	P
	6	Fig.141	16520	P
	11	Fig.142	16440	P

802.11n mode

Mode	Channel	Test Results (kHz)		conclusion
802.11n (20MHz)	1	Fig.143	17760	P
	6	Fig.144	17720	P
	11	Fig.145	17720	P

See ANNEX B for test graphs.

Conclusion: PASS

A.8 AC Powerline Conducted Emission

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:

WLAN (Quasi-peak Limit)-AE1

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)	Conclusion
		Traffic	
0.15 to 0.5	66 to 56	Fig.146	P
0.5 to 5	56		
5 to 30	60		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)-AE1

Frequency range (MHz)	Average-peak Limit (dB μ V)	Result (dB μ V)	Conclusion
		Traffic	
0.15 to 0.5	56 to 46	Fig.146	P
0.5 to 5	46		
5 to 30	50		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Quasi-peak Limit)-AE1

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)	Conclusion
		Idle	
0.15 to 0.5	66 to 56	Fig.147	P
0.5 to 5	56		
5 to 30	60		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)-AE1

Frequency range (MHz)	Average-peak Limit (dB μ V)	Result (dB μ V)	Conclusion
		Idle	
0.15 to 0.5	56 to 46	Fig.147	P
0.5 to 5	46		
5 to 30	50		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Test Condition:

Voltage (V)	Frequency (Hz)
240	60

Measurement Result and limit:

WLAN (Quasi-peak Limit)-AE1

Frequency range (MHz)	Quasi-peak Limit (dBμV)	Result (dBμV)	Conclusion
		Traffic	
0.16 to 0.5	66 to 56	Fig.148	P
0.5 to 5	56		
5 to 30	60		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)-AE1

Frequency range (MHz)	Average-peak Limit (dBμV)	Result (dBμV)	Conclusion
		Traffic	
0.15 to 0.5	56 to 46	Fig.148	P
0.5 to 5	46		
5 to 30	50		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Quasi-peak Limit)-AE1

Frequency range (MHz)	Quasi-peak Limit (dBμV)	Result (dBμV)	Conclusion
		Idle	
0.16 to 0.5	66 to 56	Fig.149	P
0.5 to 5	56		
5 to 30	60		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)-AE1

Frequency range (MHz)	Average-peak Limit (dBμV)	Result (dBμV)	Conclusion
		Idle	
0.15 to 0.5	56 to 46	Fig.149	P
0.5 to 5	46		
5 to 30	50		

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

See ANNEX B for test graphs.

Conclusion: PASS

ANNEX B: TEST GRAPHS

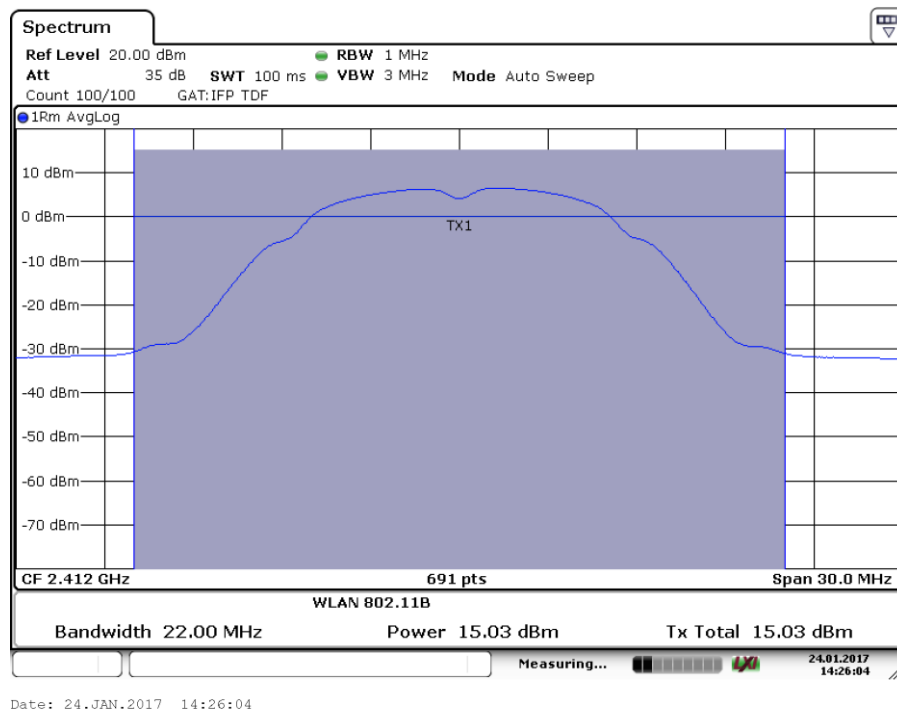


Fig.1 Maximum Average Output Power (802.11b, Ch 1, 1Mbps)

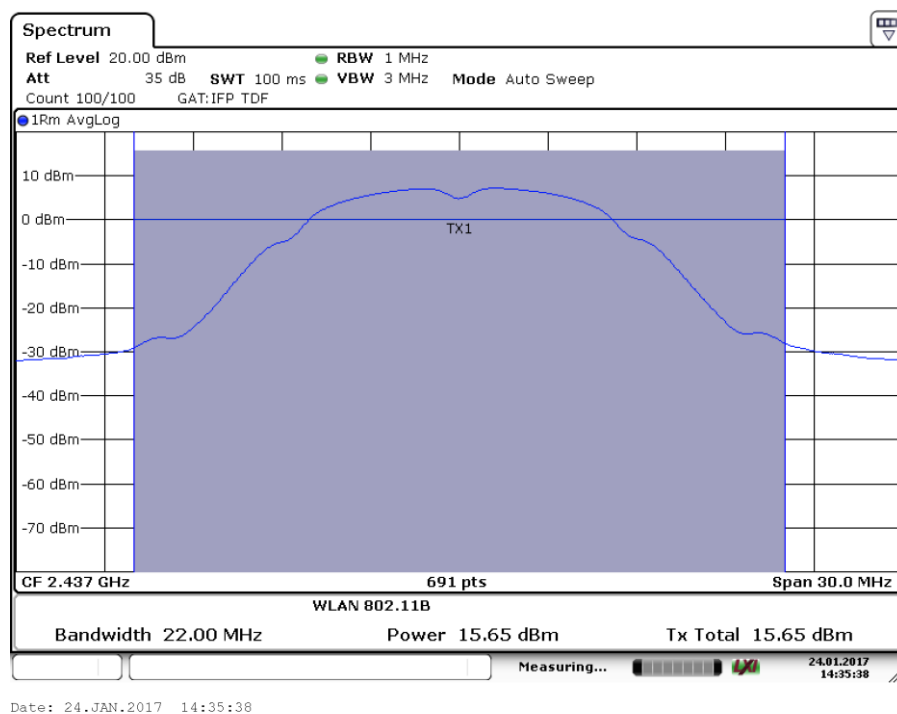


Fig.2 Maximum Average Output Power (802.11b, Ch 6, 1Mbps)

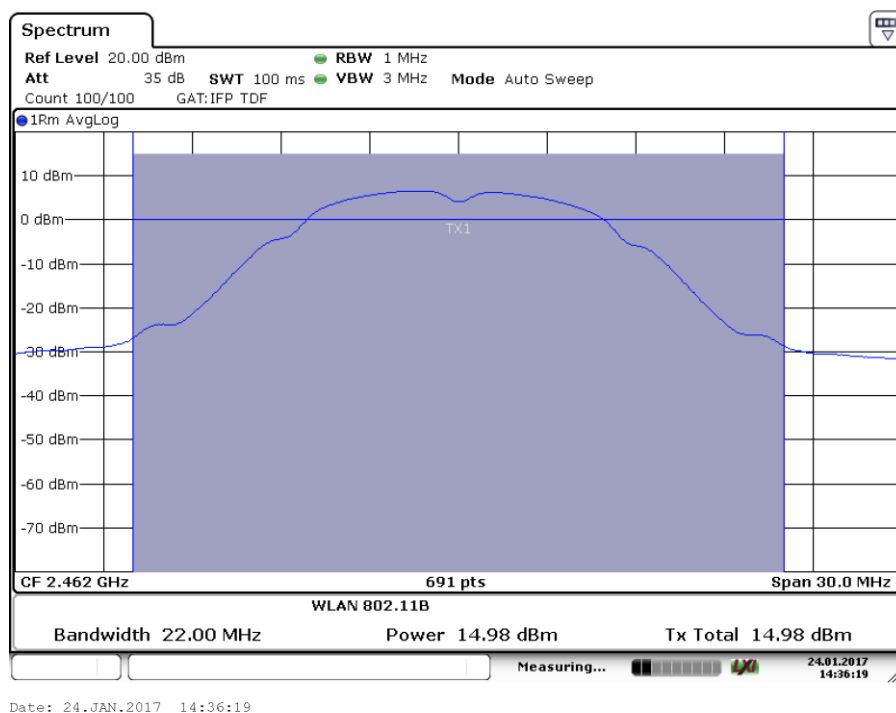


Fig.3 Maximum Average Output Power (802.11b, Ch 11, 1Mbps)

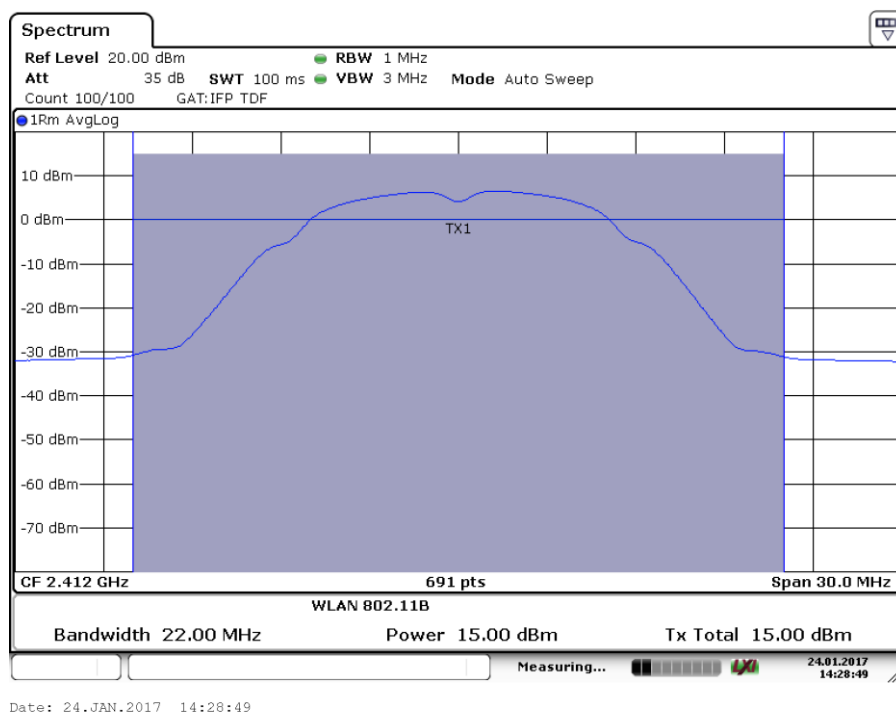


Fig.4 Maximum Average Output Power (802.11b, Ch 1, 2Mbps)

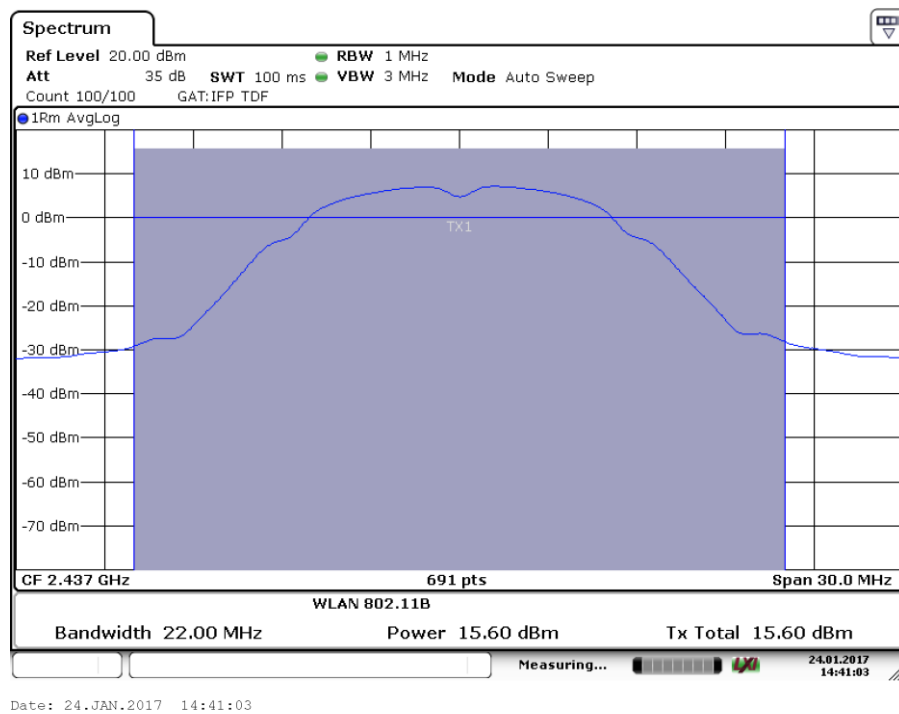


Fig.5 Maximum Average Output Power (802.11b, Ch 6, 2Mbps)

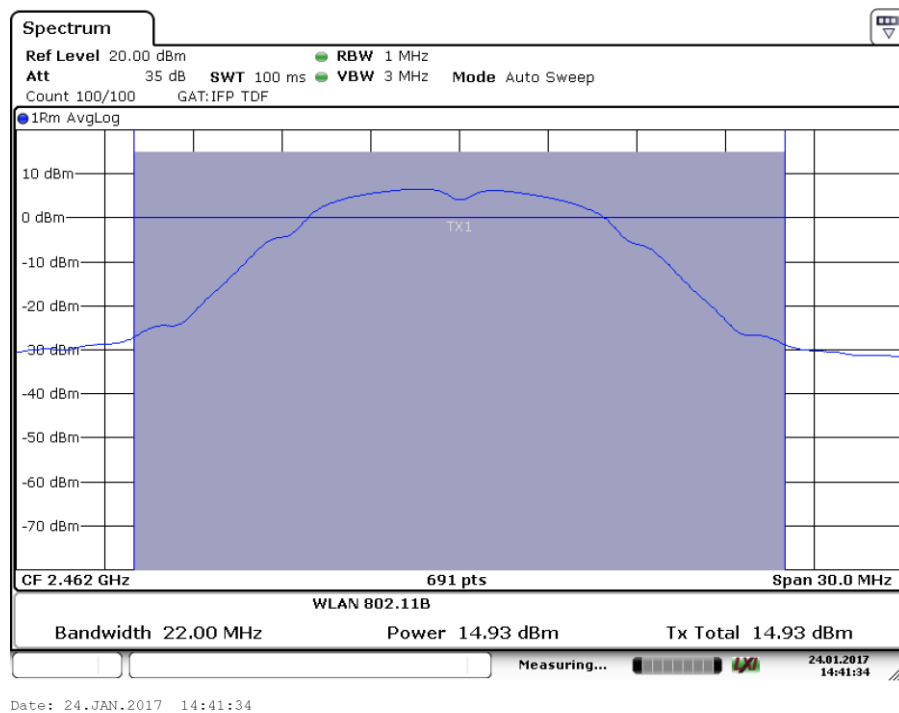


Fig.6 Maximum Average Output Power (802.11b, Ch 11, 2Mbps)

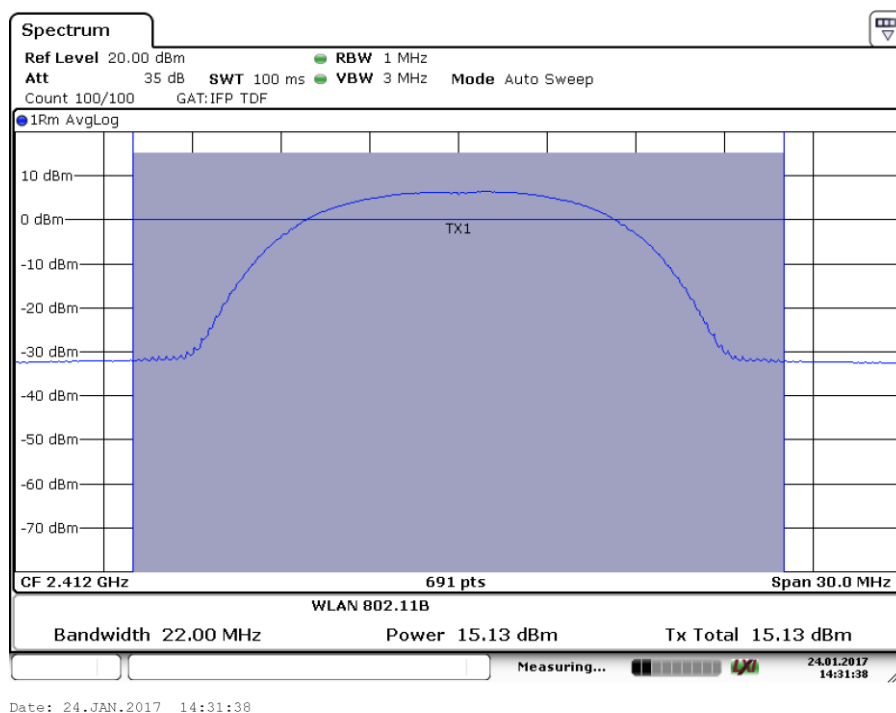


Fig.7 Maximum Average Output Power (802.11b, Ch 1, 5.5Mbps)

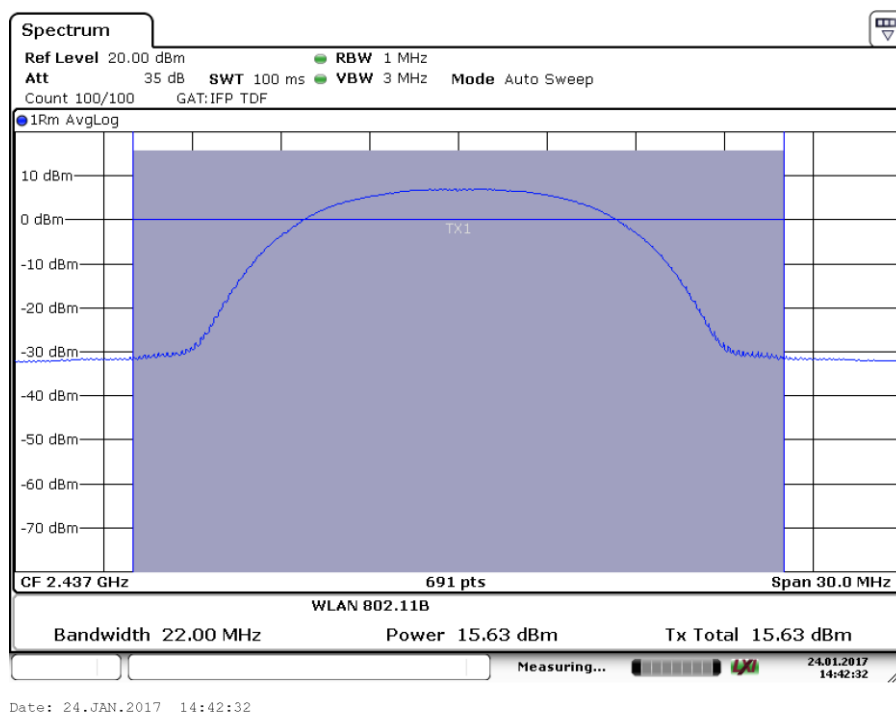


Fig.8 Maximum Average Output Power (802.11b, Ch 6, 5.5Mbps)

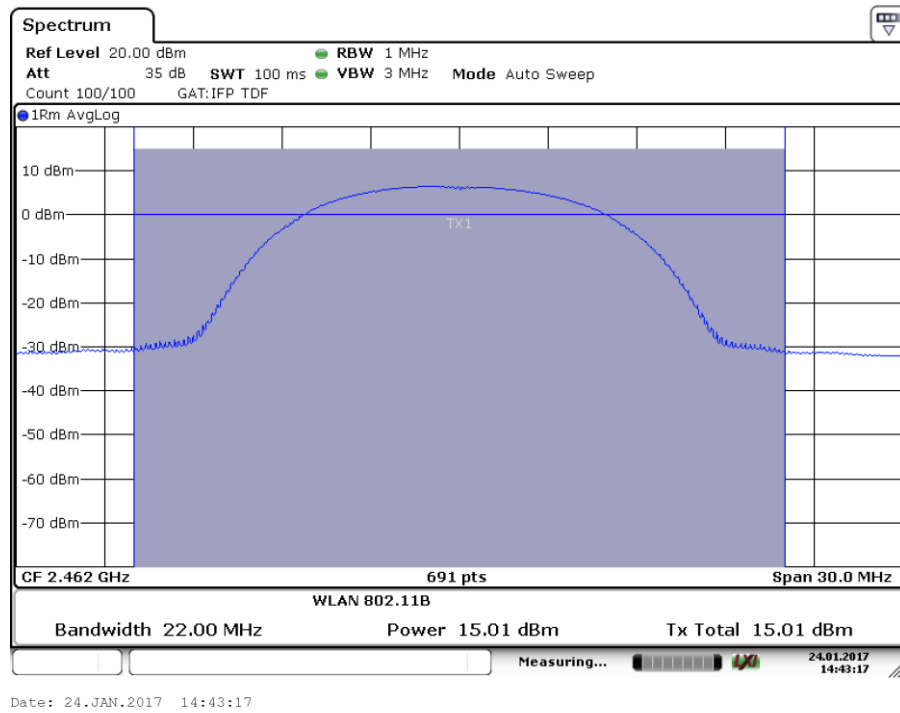


Fig.9 Maximum Average Output Power (802.11b, Ch 11, 5.5Mbps)

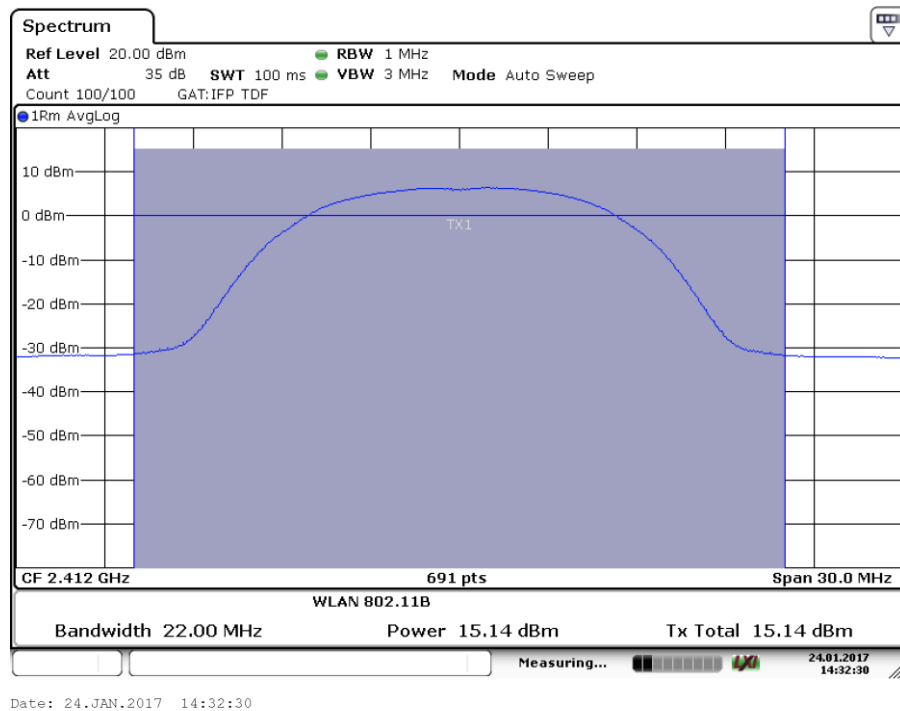


Fig.10 Maximum Average Output Power (802.11b, Ch 1, 11Mbps)

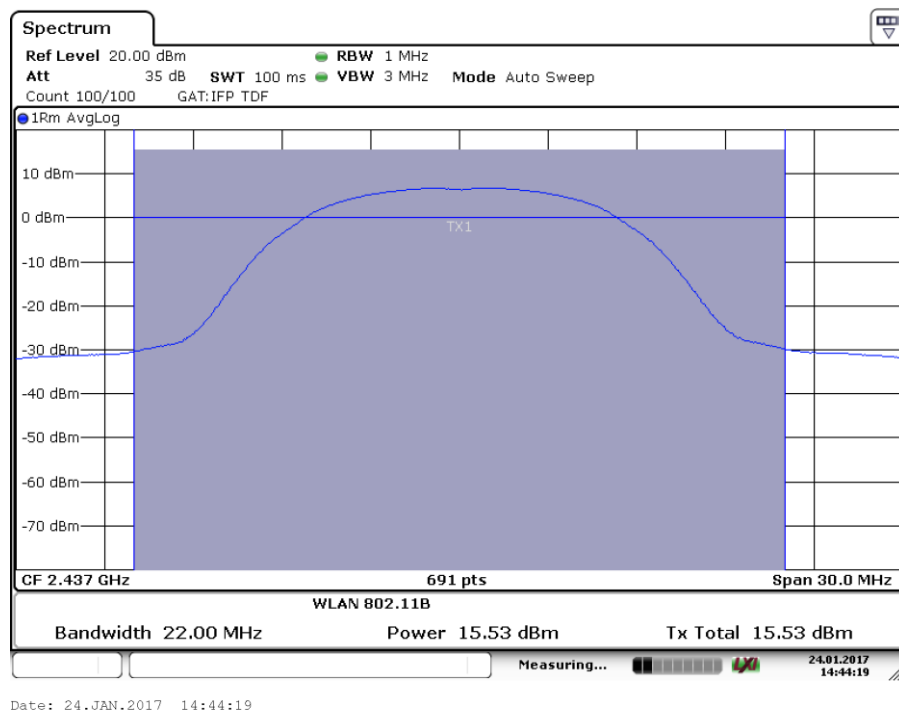


Fig.11 Maximum Average Output Power (802.11b, Ch 6, 11Mbps)

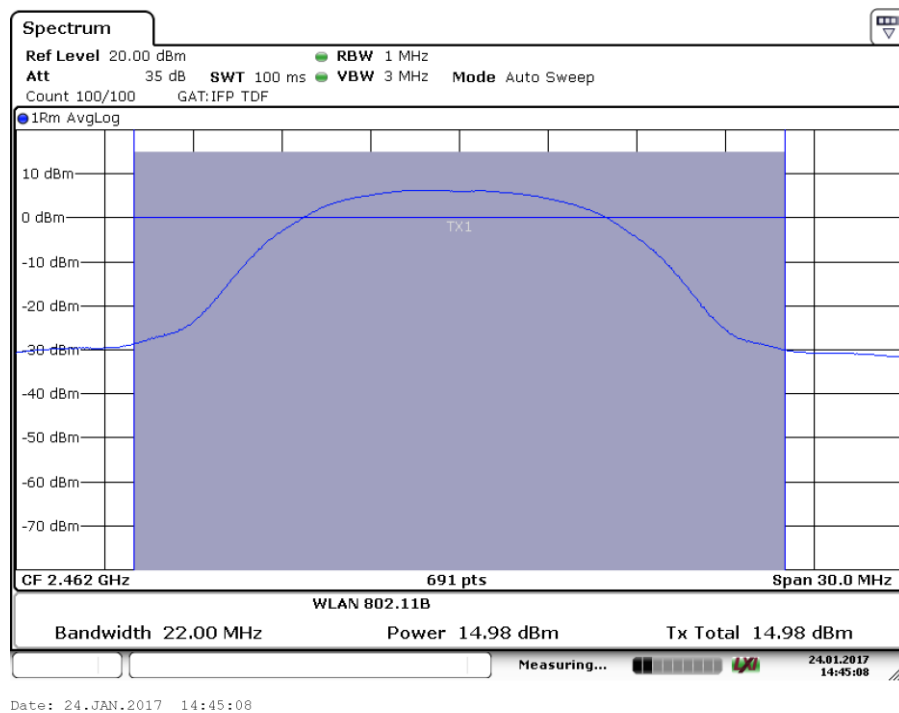


Fig.12 Maximum Average Output Power (802.11b, Ch 11, 11Mbps)

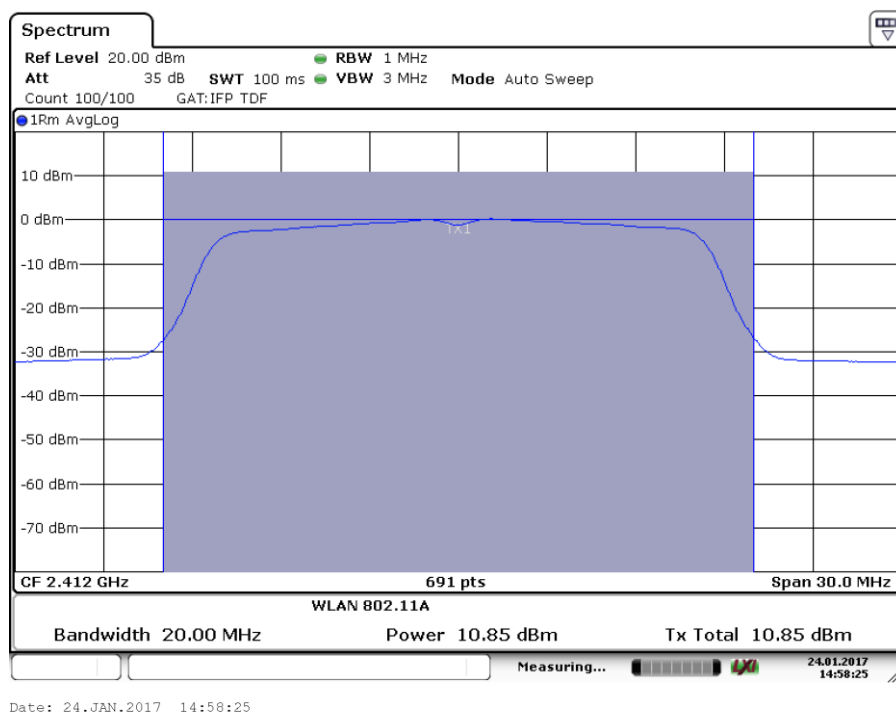


Fig.13 Maximum Average Output Power (802.11g, Ch 1, 6Mbps)

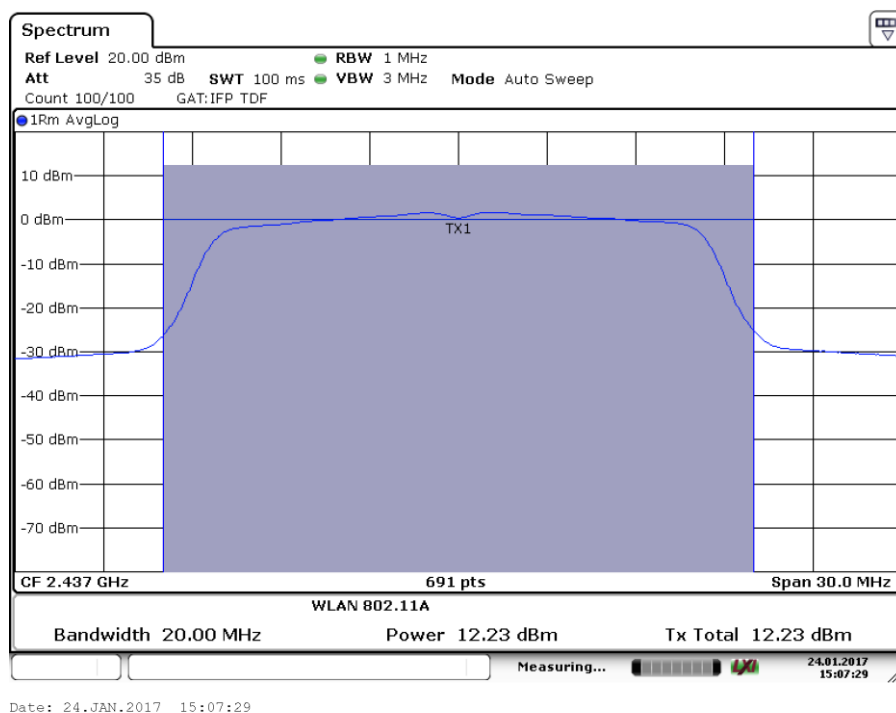


Fig.14 Maximum Average Output Power (802.11g, Ch 6, 6Mbps)

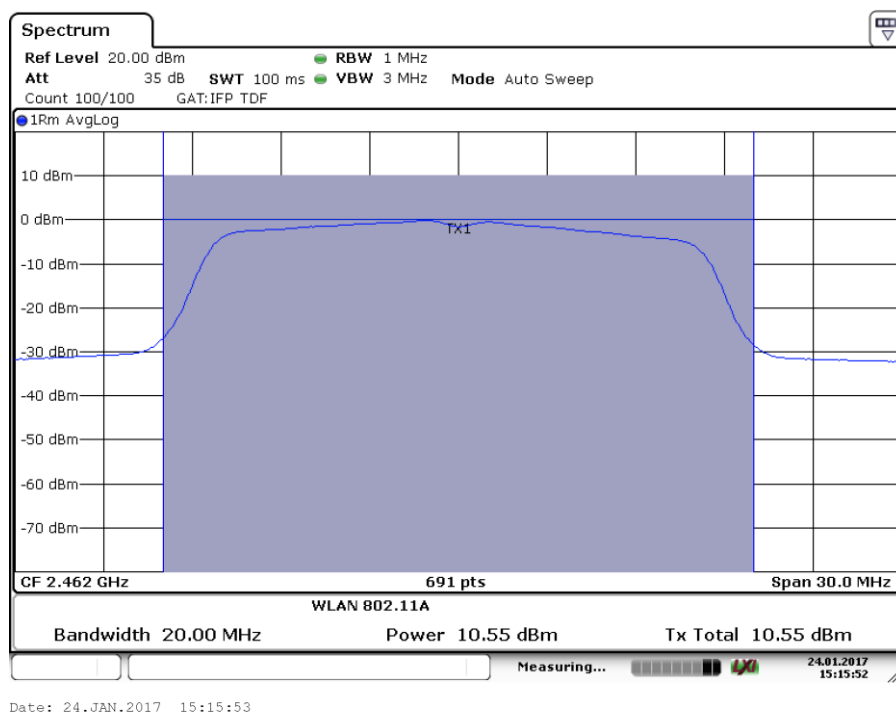


Fig.15 Maximum Average Output Power (802.11g, Ch 11, 6Mbps)

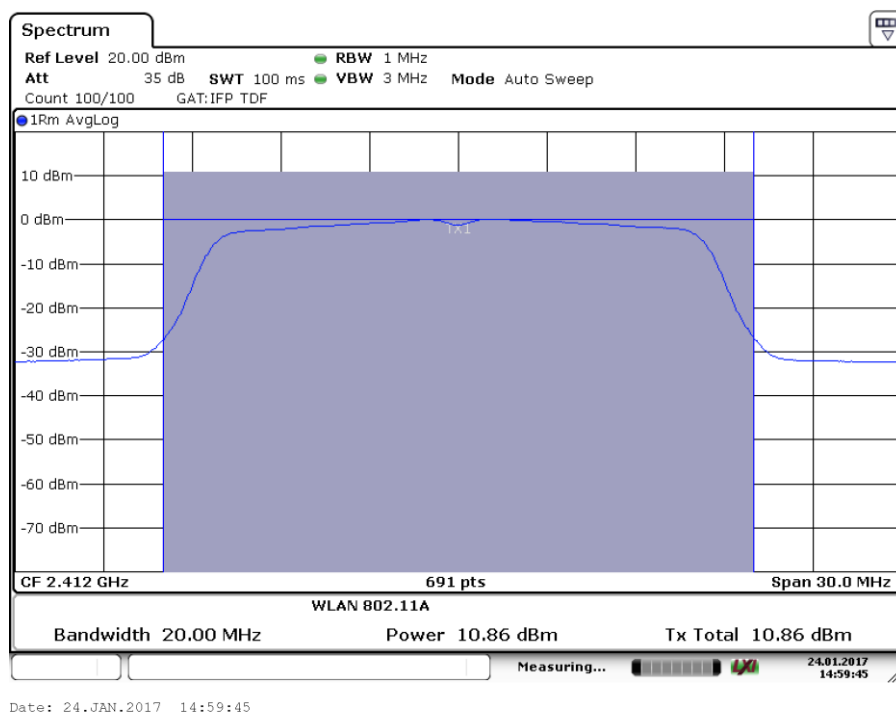


Fig.16 Maximum Average Output Power (802.11g, Ch 1, 9Mbps)

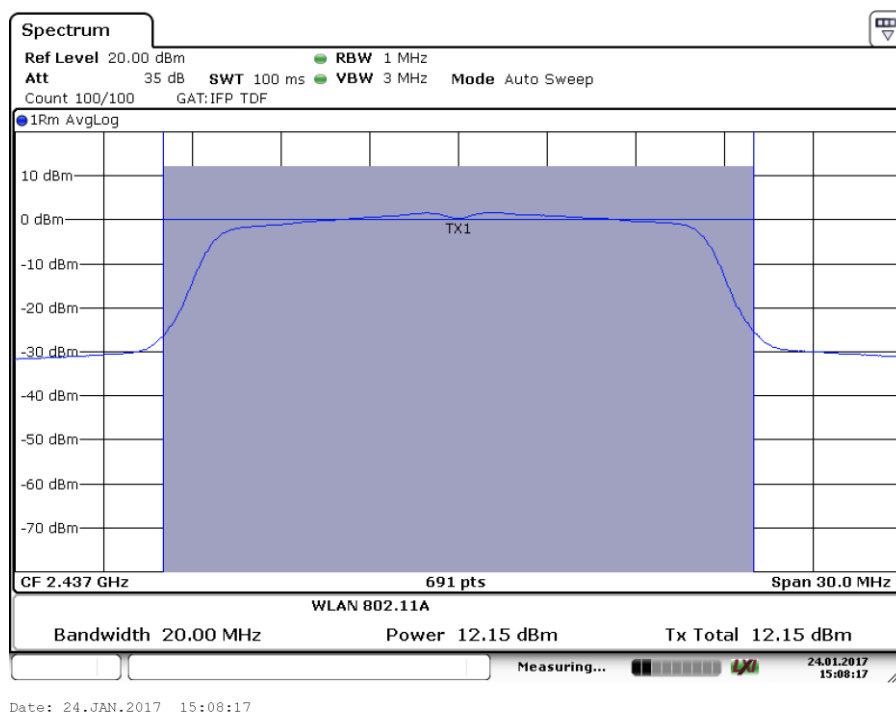


Fig.17 Maximum Average Output Power (802.11g, Ch 6, 9Mbps)

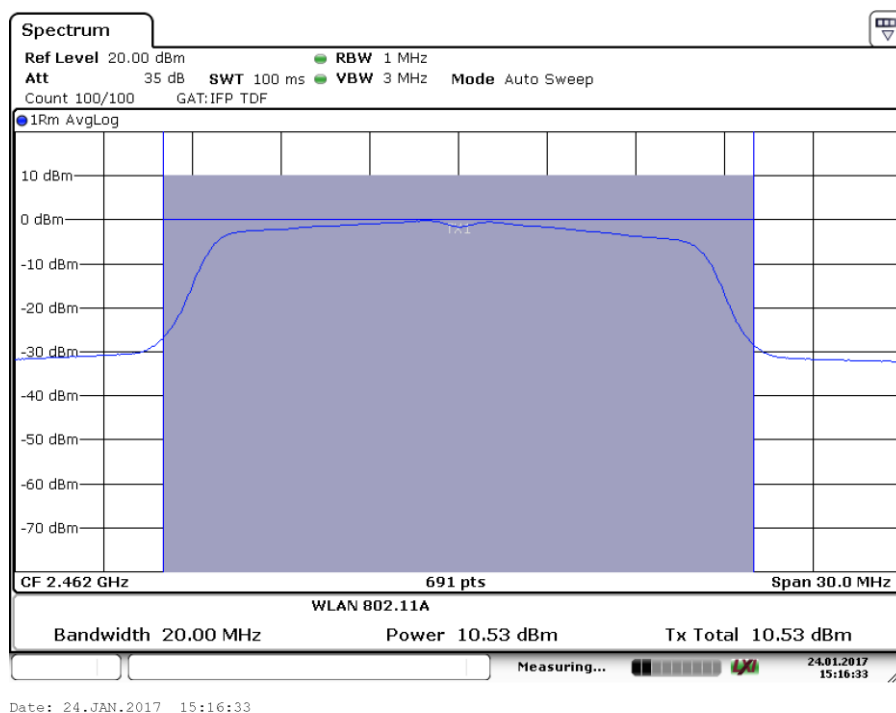


Fig.18 Maximum Average Output Power (802.11g, Ch 11, 9Mbps)

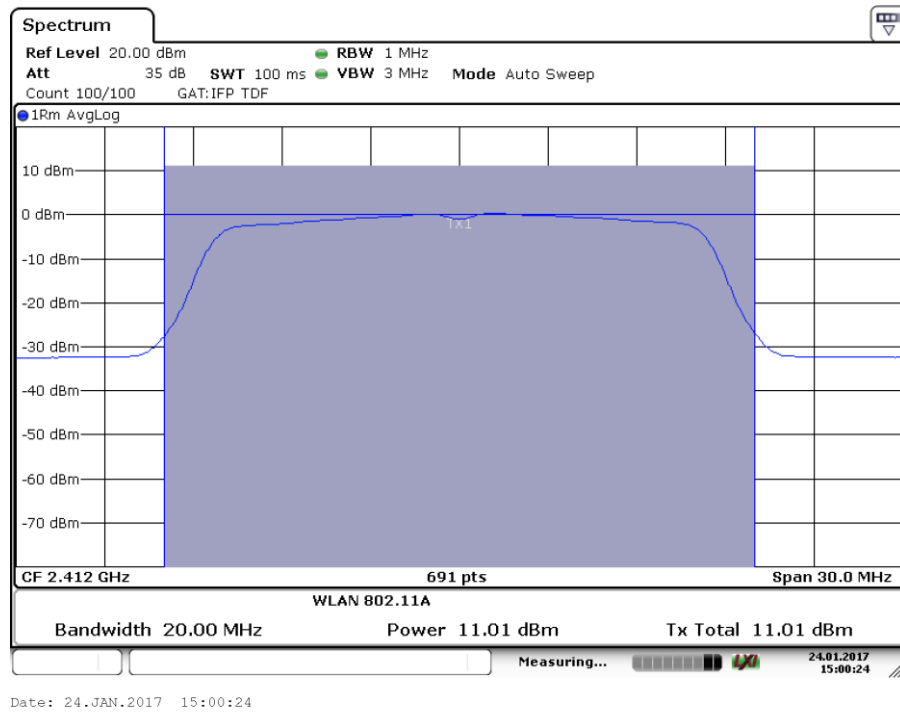


Fig.19 Maximum Average Output Power (802.11g, Ch 1, 12Mbps)

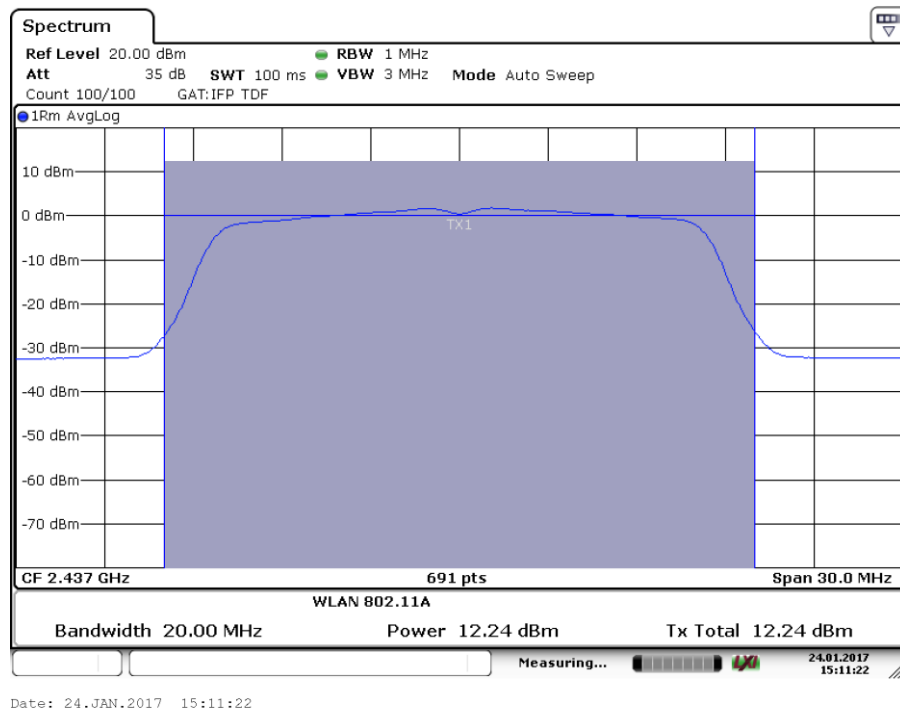


Fig.20 Maximum Average Output Power (802.11g, Ch 6, 12Mbps)

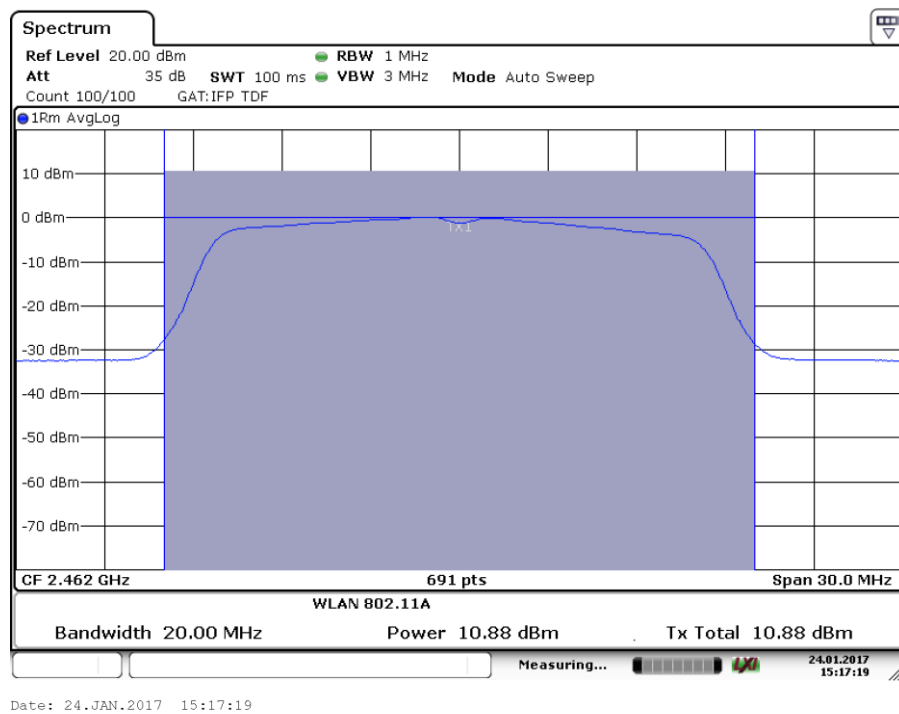


Fig.21 Maximum Average Output Power (802.11g, Ch 11, 12Mbps)

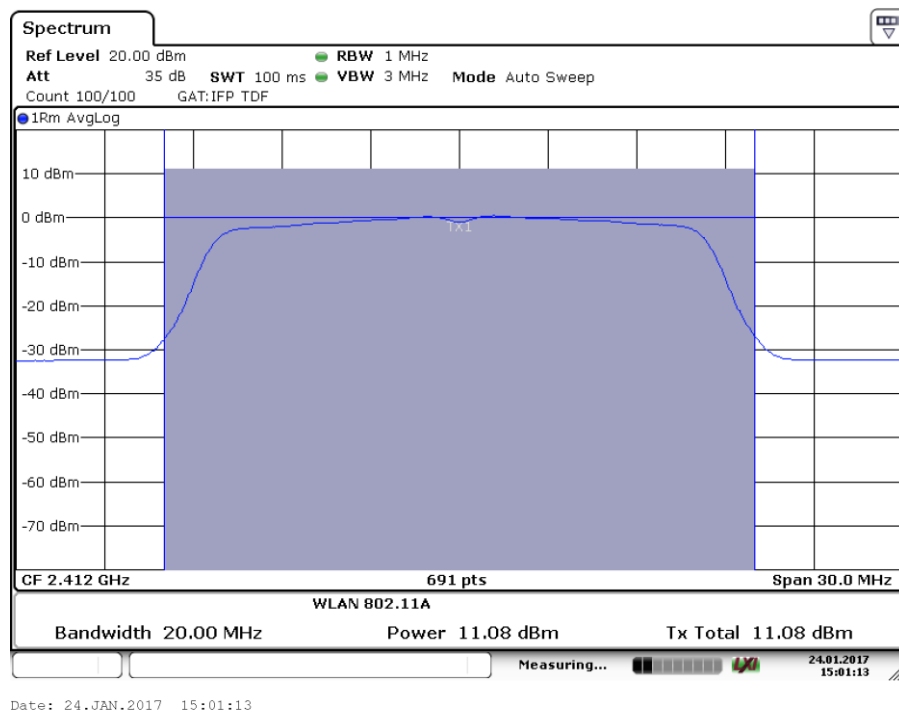


Fig.22 Maximum Average Output Power (802.11g, Ch 1, 18Mbps)

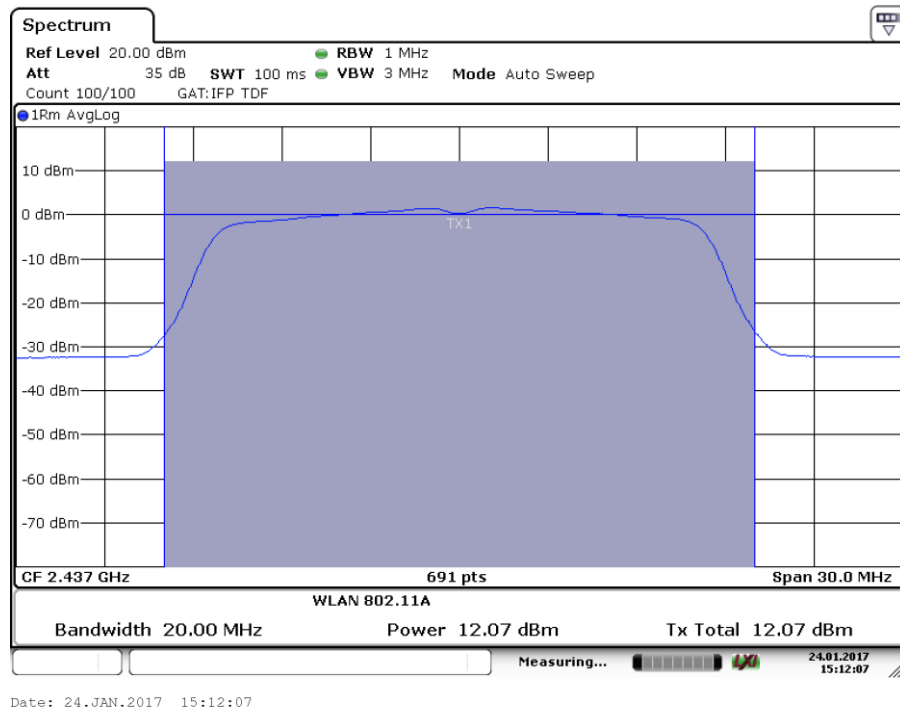


Fig.23 Maximum Average Output Power (802.11g, Ch 6, 18Mbps)

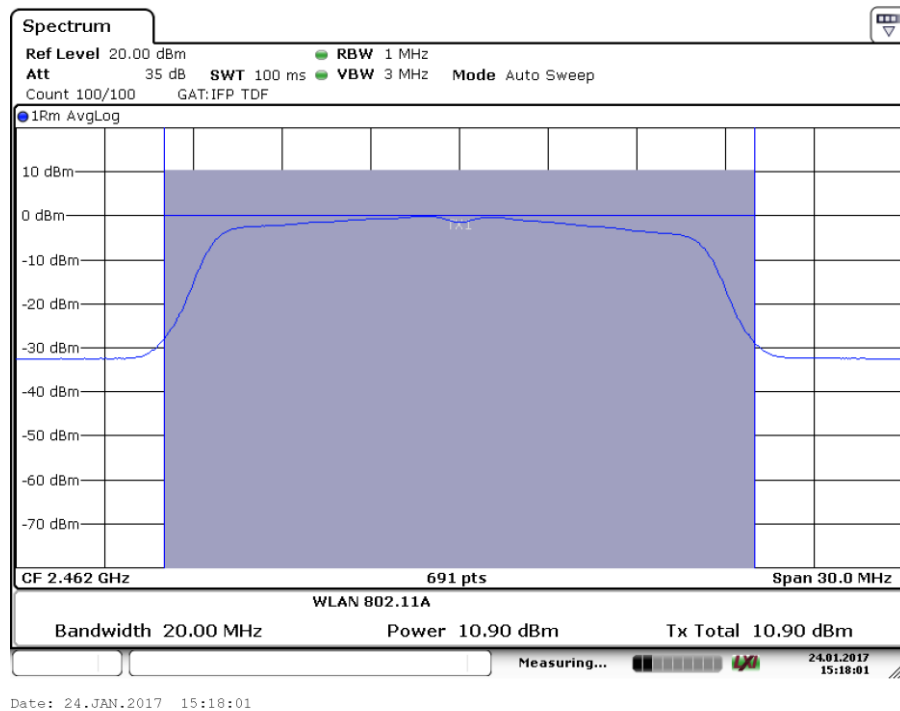


Fig.24 Maximum Average Output Power (802.11g, Ch 11, 18Mbps)

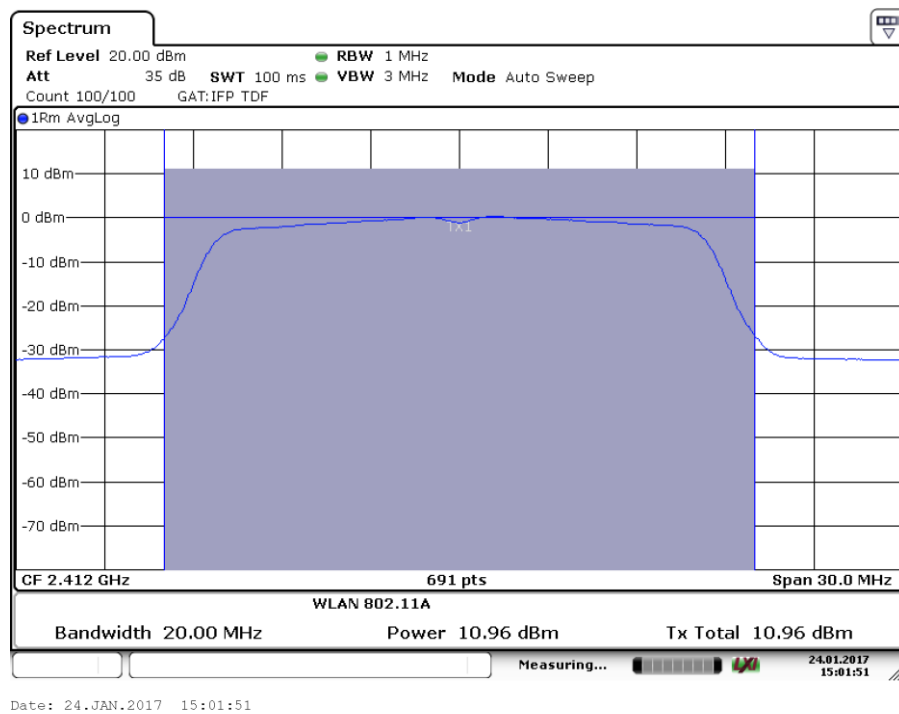


Fig.25 Maximum Average Output Power (802.11g, Ch 1, 24Mbps)

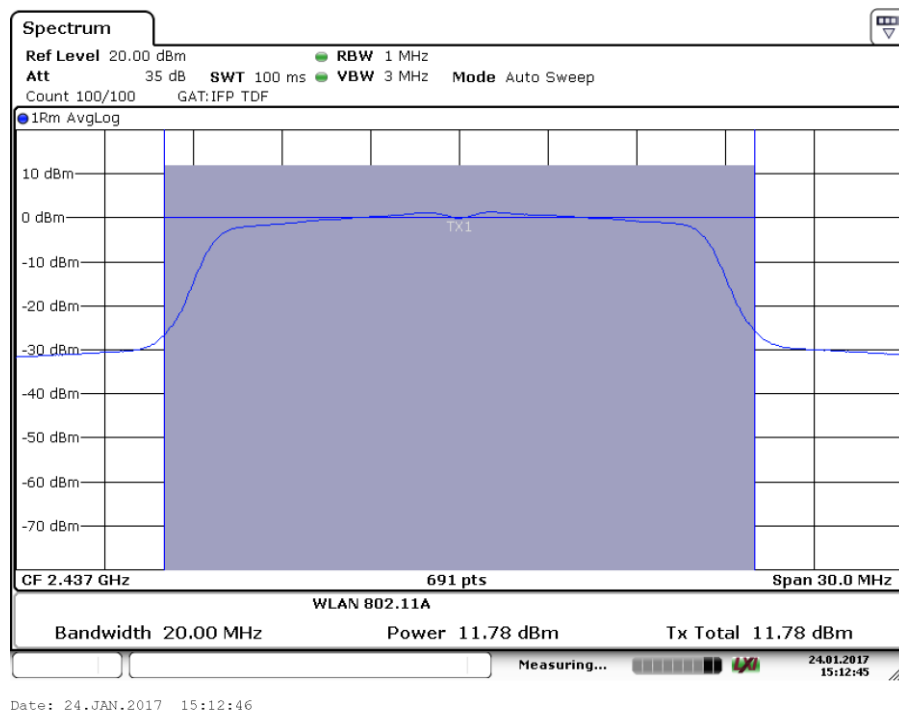


Fig.26 Maximum Average Output Power (802.11g, Ch 6, 24Mbps)

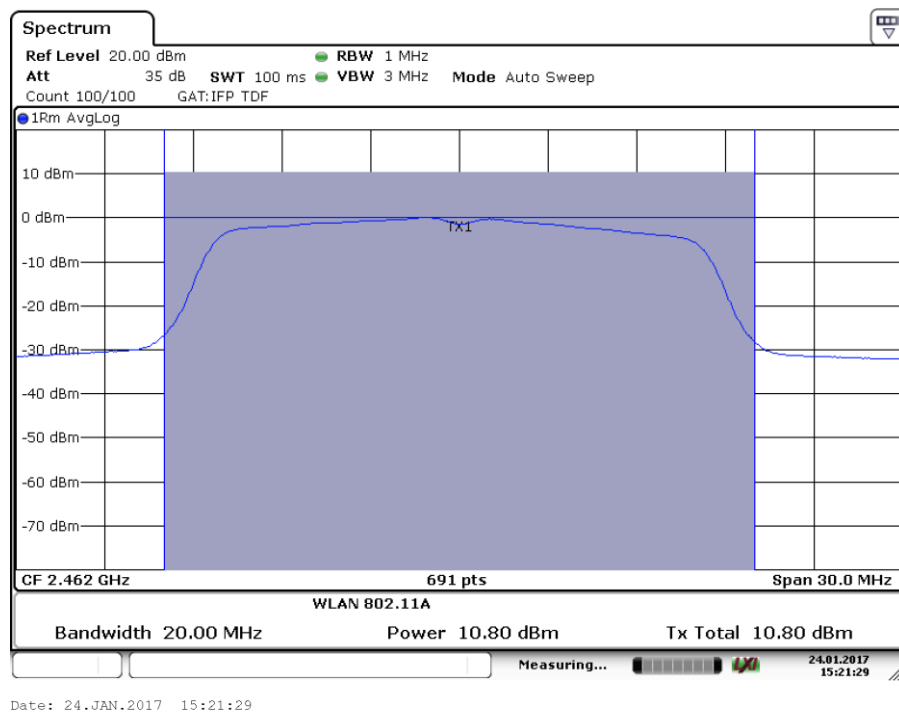


Fig.27 Maximum Average Output Power (802.11g, Ch 11, 24Mbps)

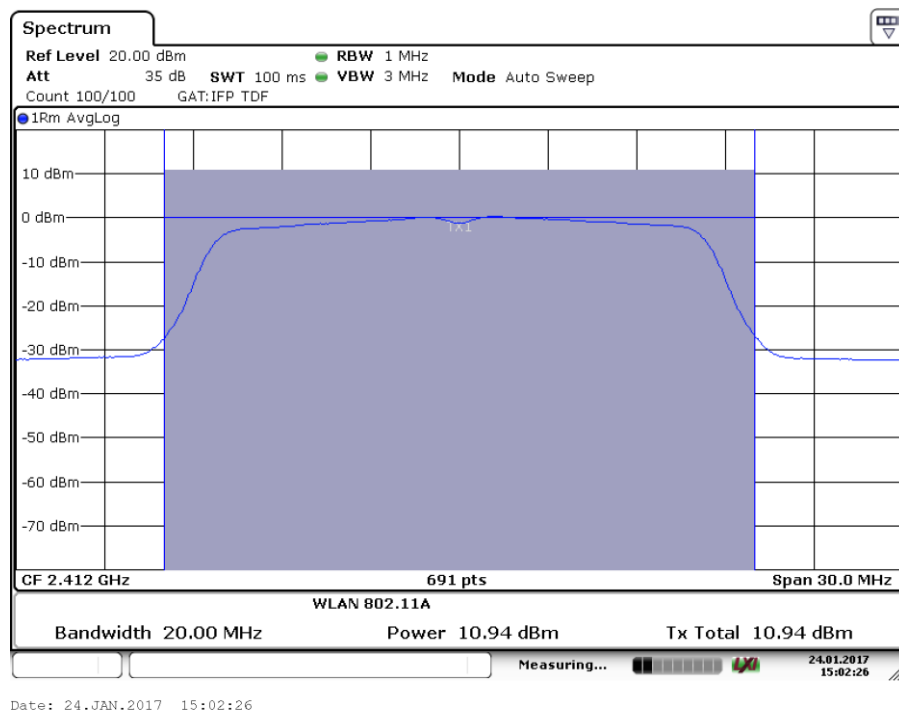


Fig.28 Maximum Average Output Power (802.11g, Ch 1, 36Mbps)

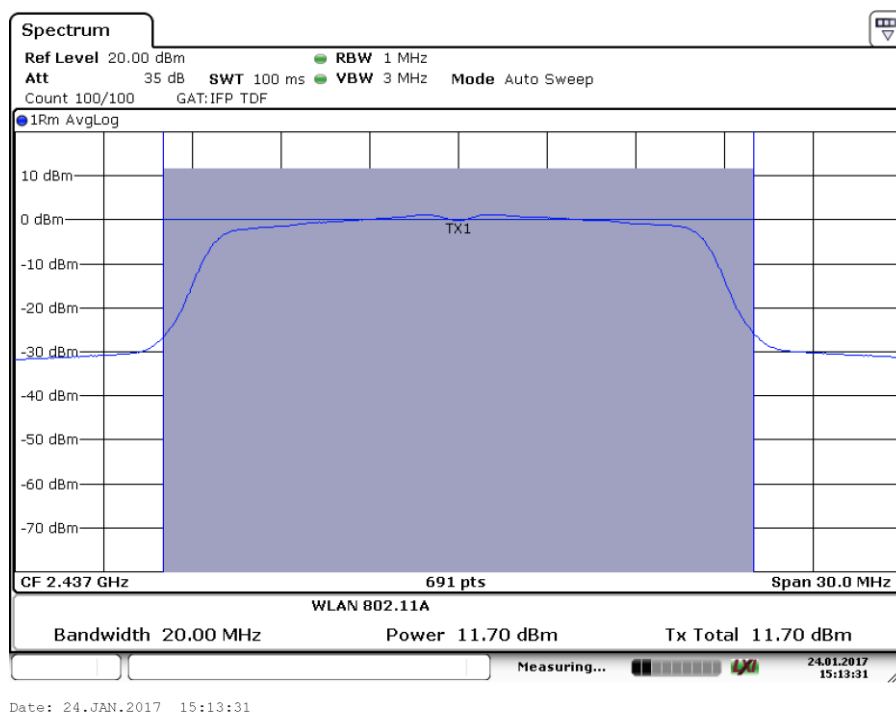


Fig.29 Maximum Average Output Power (802.11g, Ch 6, 36Mbps)

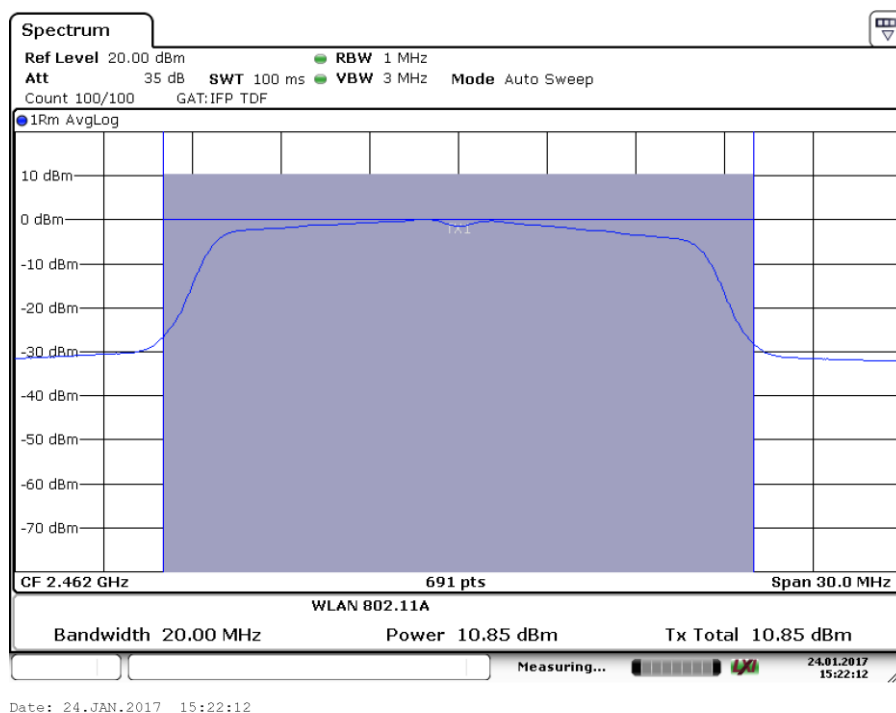


Fig.30 Maximum Average Output Power (802.11g, Ch 11, 36Mbps)

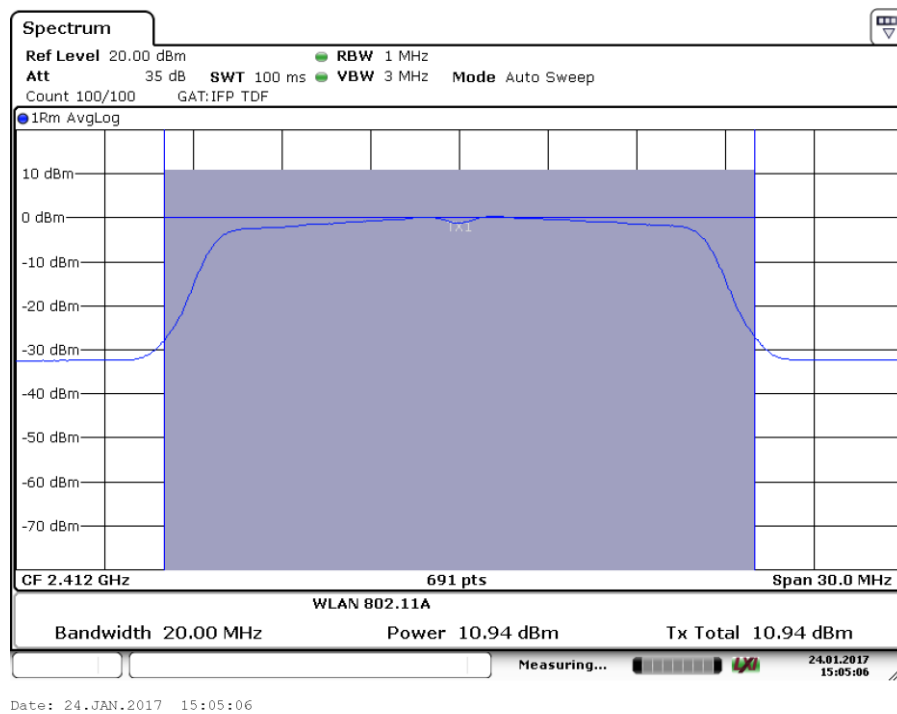


Fig.31 Maximum Average Output Power (802.11g, Ch 1, 48Mbps)

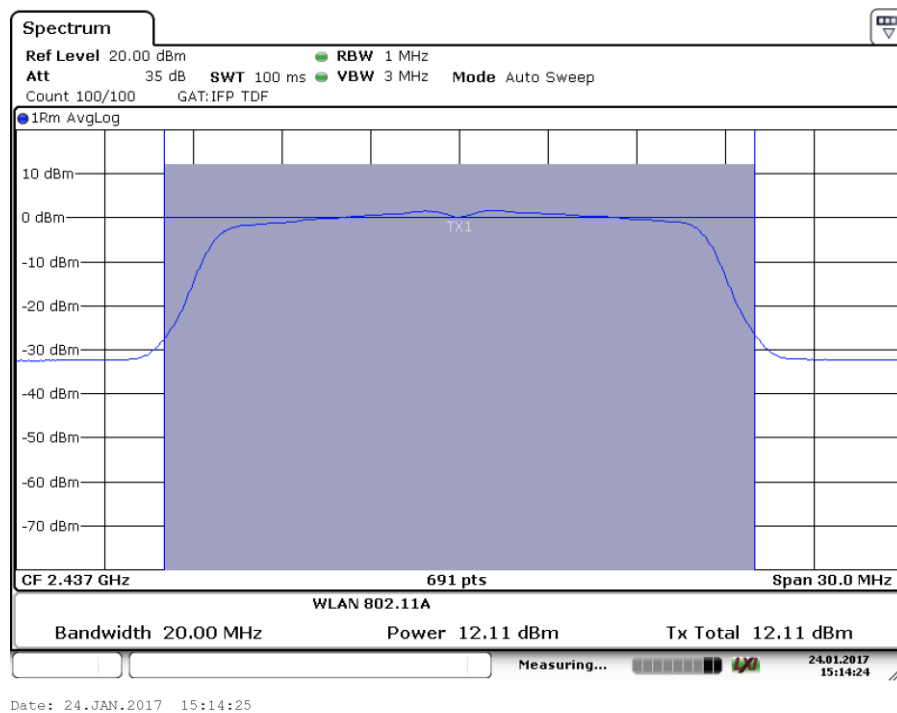


Fig.32 Maximum Average Output Power (802.11g, Ch 6, 48Mbps)

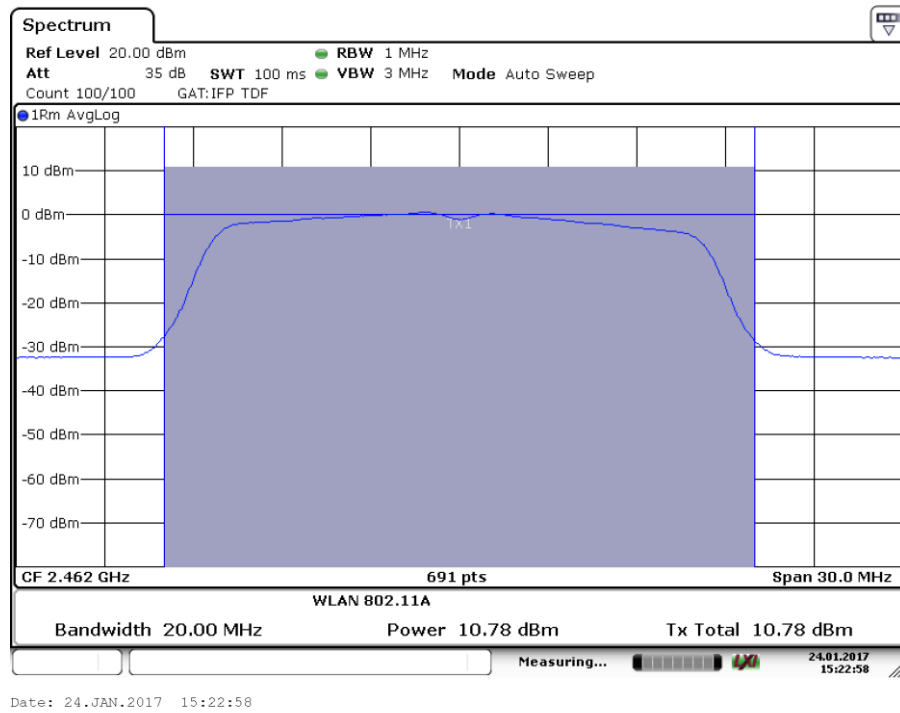


Fig.33 Maximum Average Output Power (802.11g, Ch 11, 48Mbps)

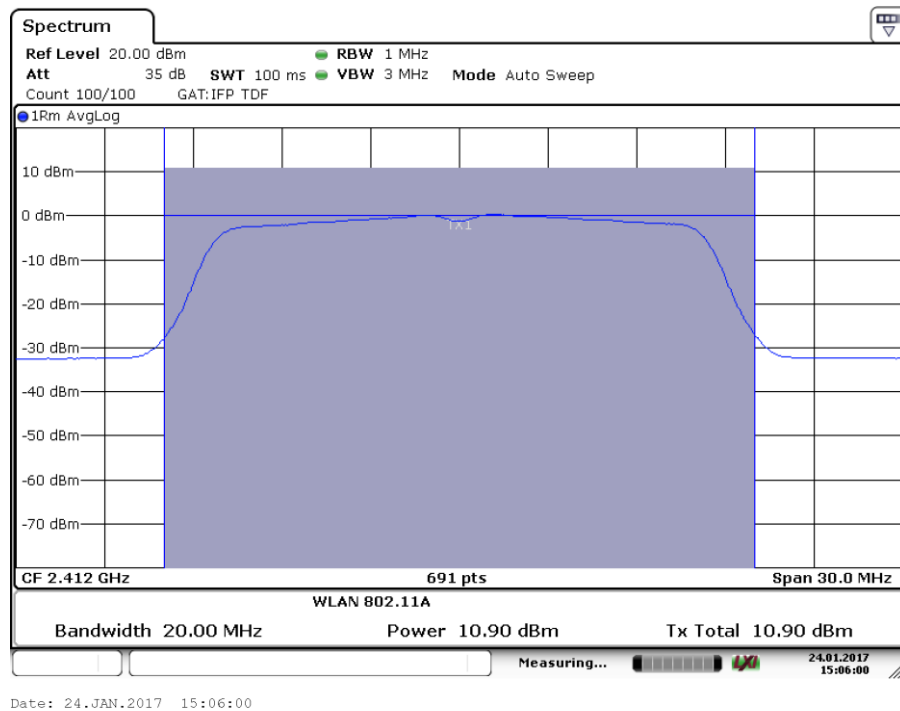


Fig.34 Maximum Average Output Power (802.11g, Ch 1, 54Mbps)

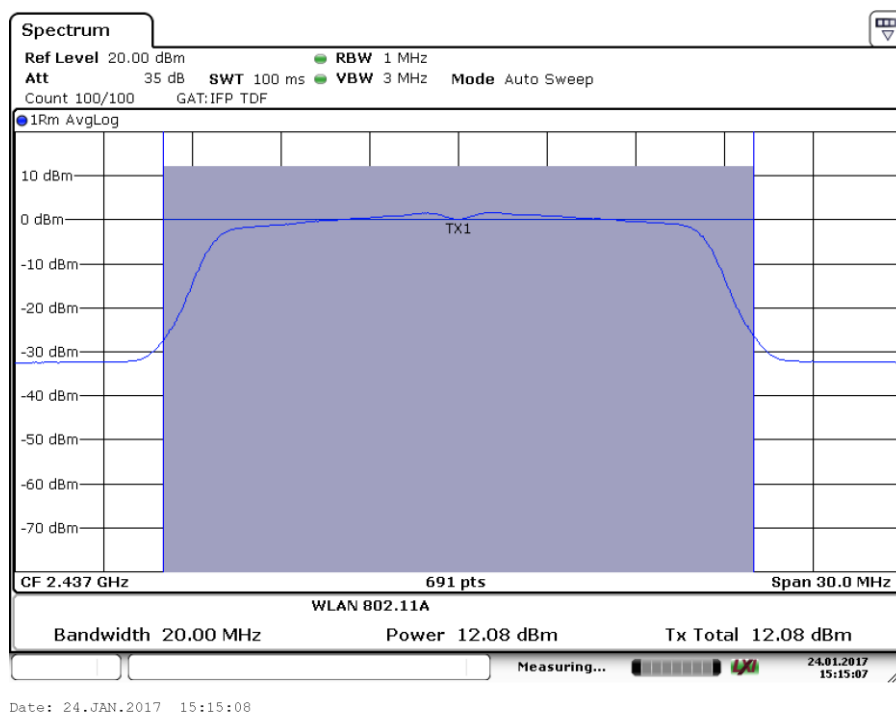


Fig.35 Maximum Average Output Power (802.11g, Ch 6, 54Mbps)

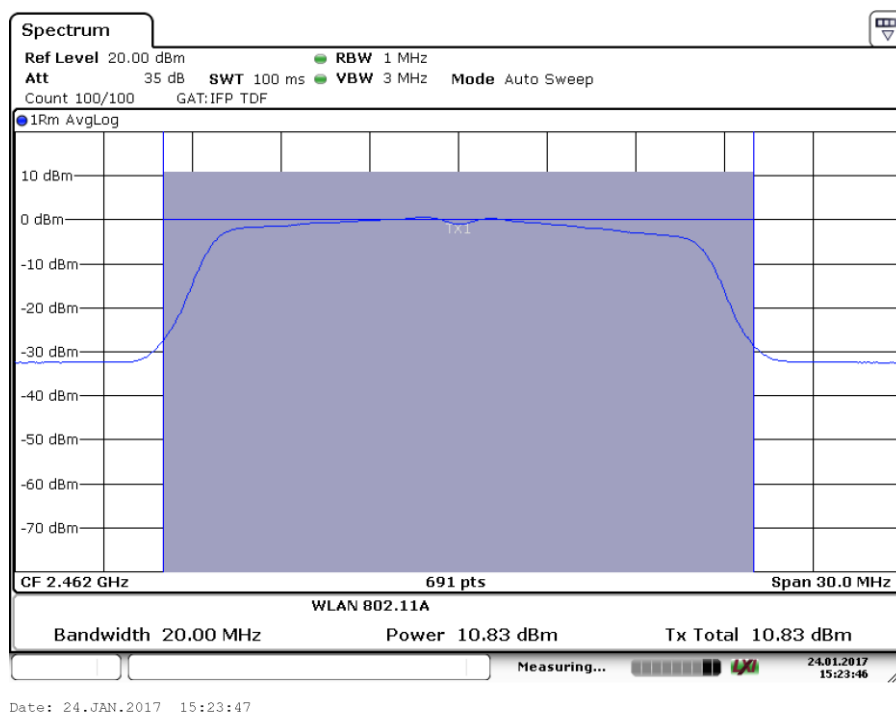


Fig.36 Maximum Average Output Power (802.11g, Ch 11, 54Mbps)

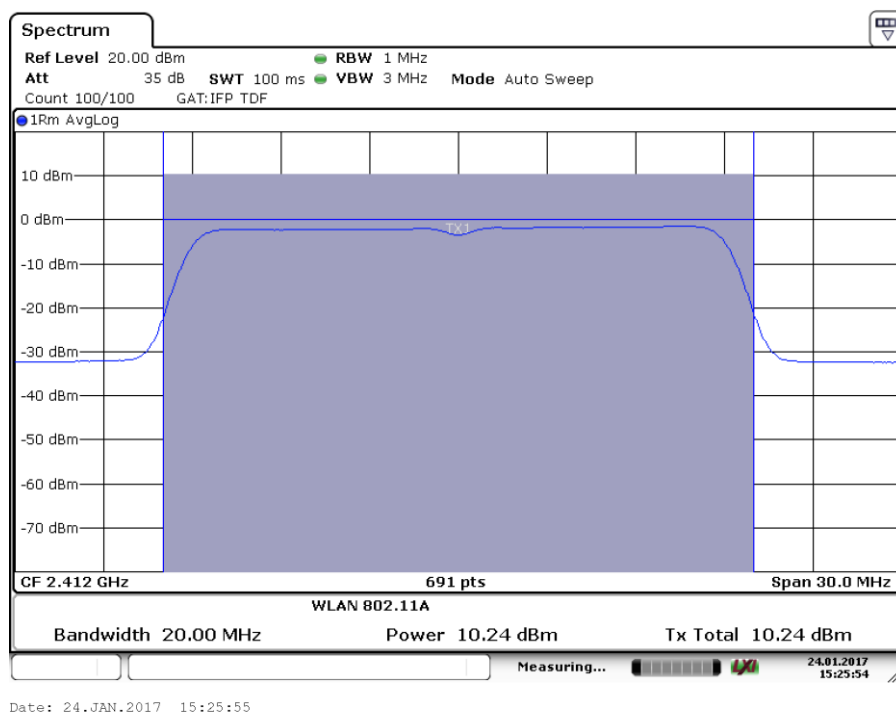


Fig.37 Maximum Average Output Power (802.11n-20MHz, Ch 1, MCS0)

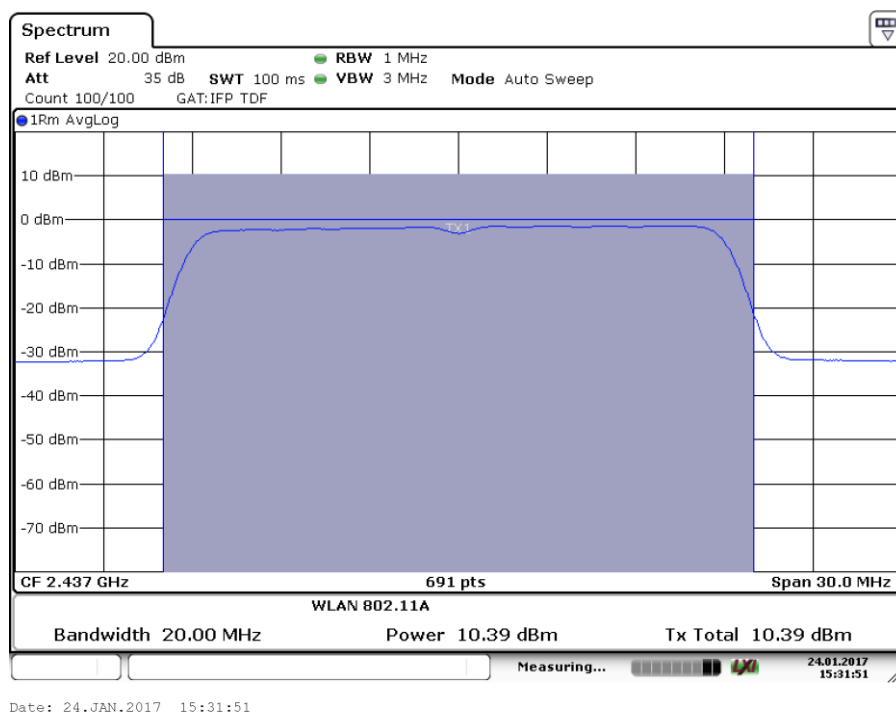


Fig.38 Maximum Average Output Power (802.11n-20MHz, Ch 6, MCS0)

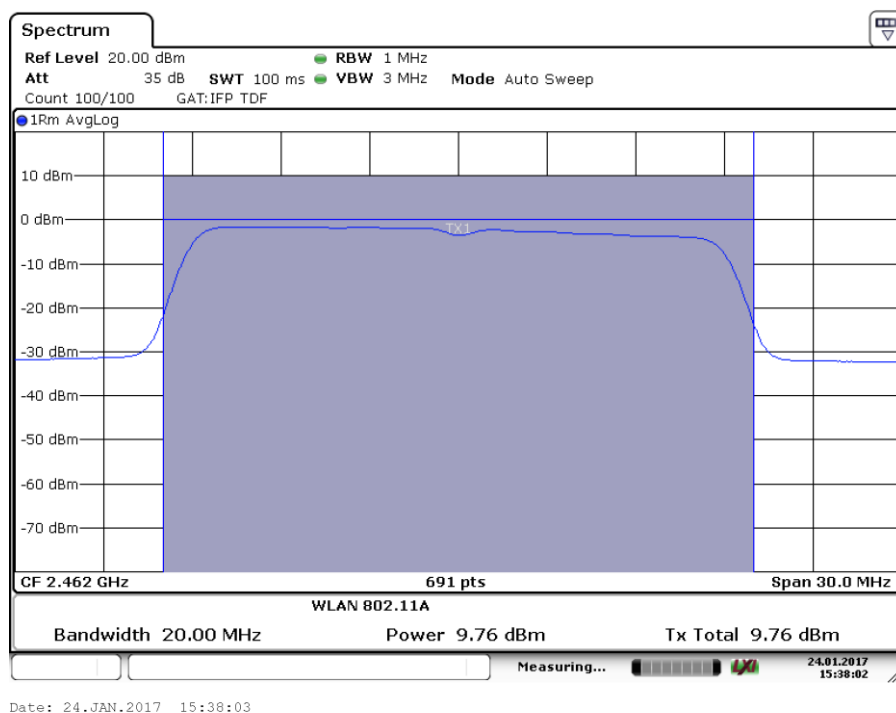


Fig.39 Maximum Average Output Power (802.11n-20MHz, Ch 11, MCS0)

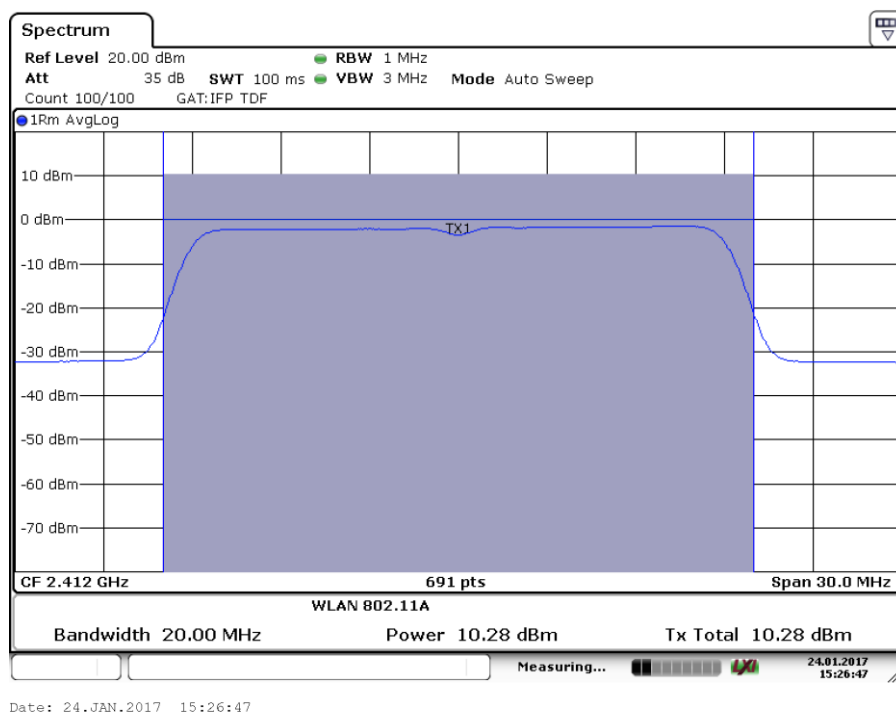


Fig.40 Maximum Average Output Power (802.11n-20MHz, Ch 1, MCS1)

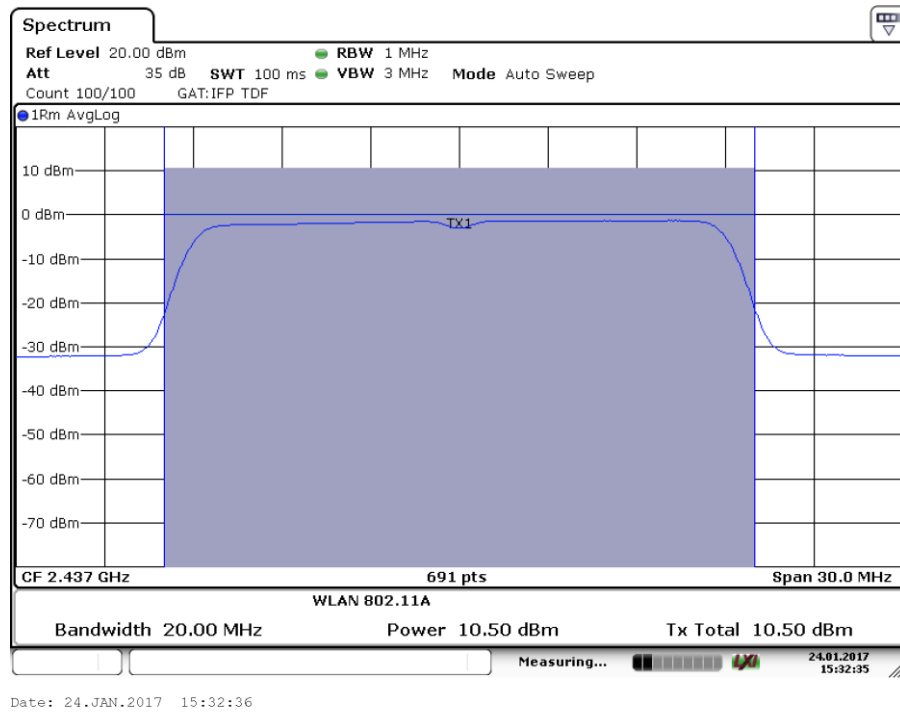


Fig.41 Maximum Average Output Power (802.11n-20MHz, Ch 6, MCS1)

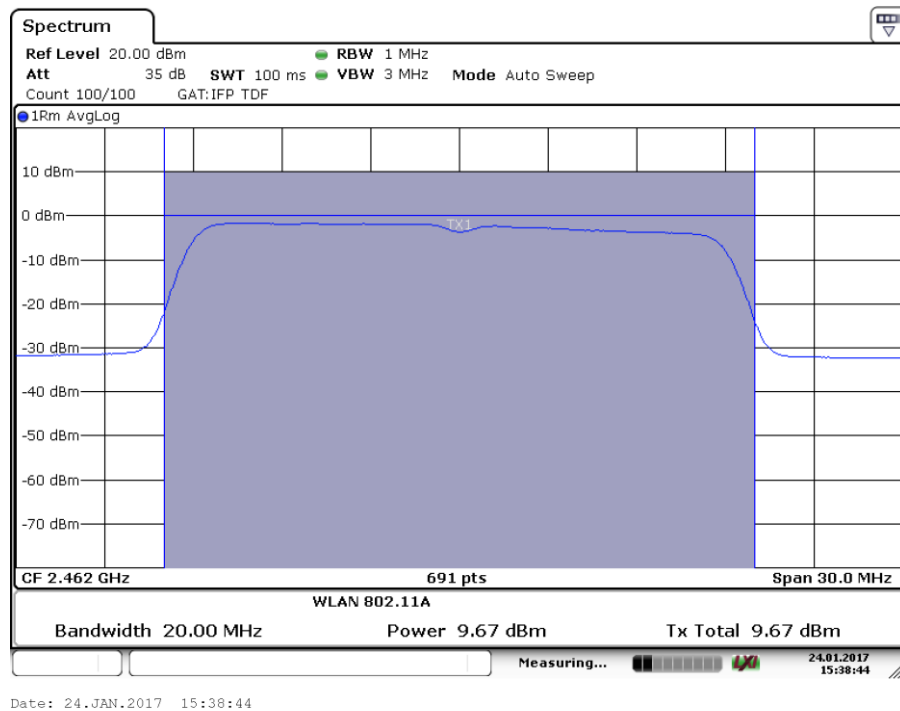


Fig.42 Maximum Average Output Power (802.11n-20MHz, Ch 11, MCS1)

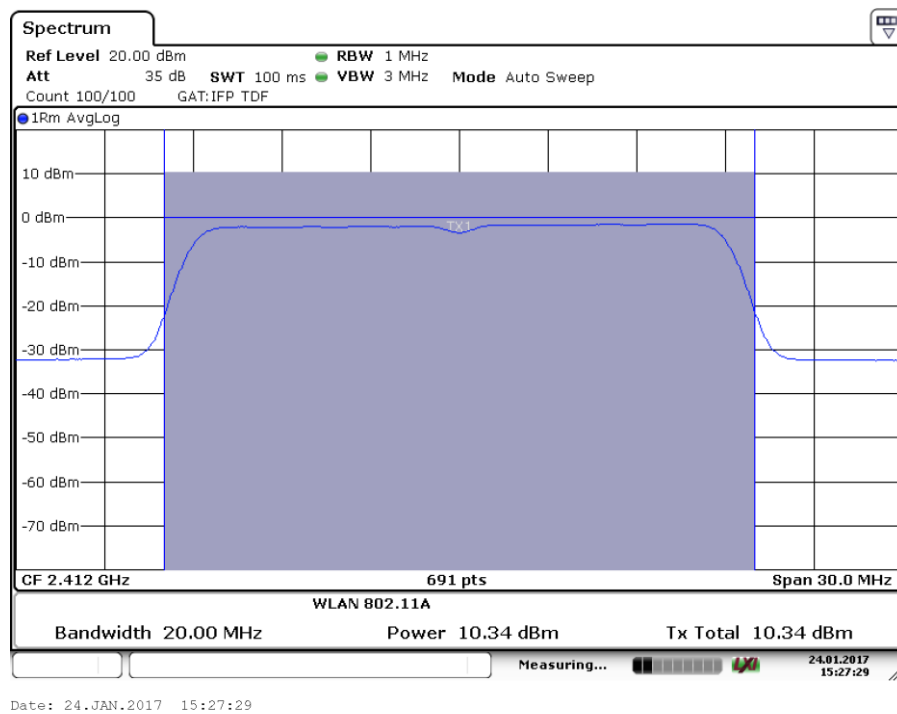


Fig.43 Maximum Average Output Power (802.11n-20MHz, Ch 1, MCS2)

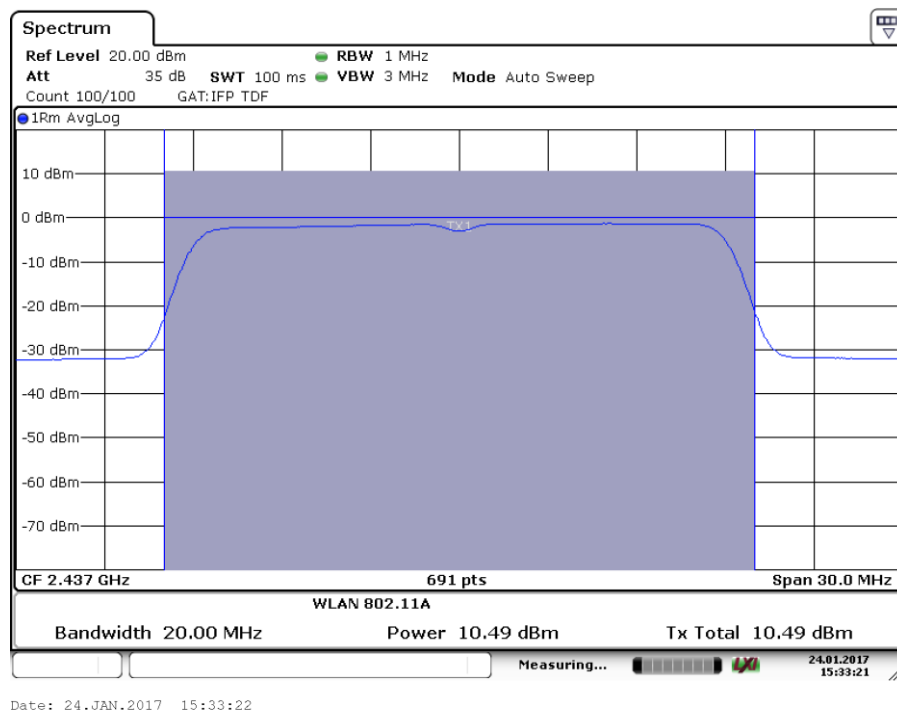


Fig.44 Maximum Average Output Power (802.11n-20MHz, Ch 6, MCS2)

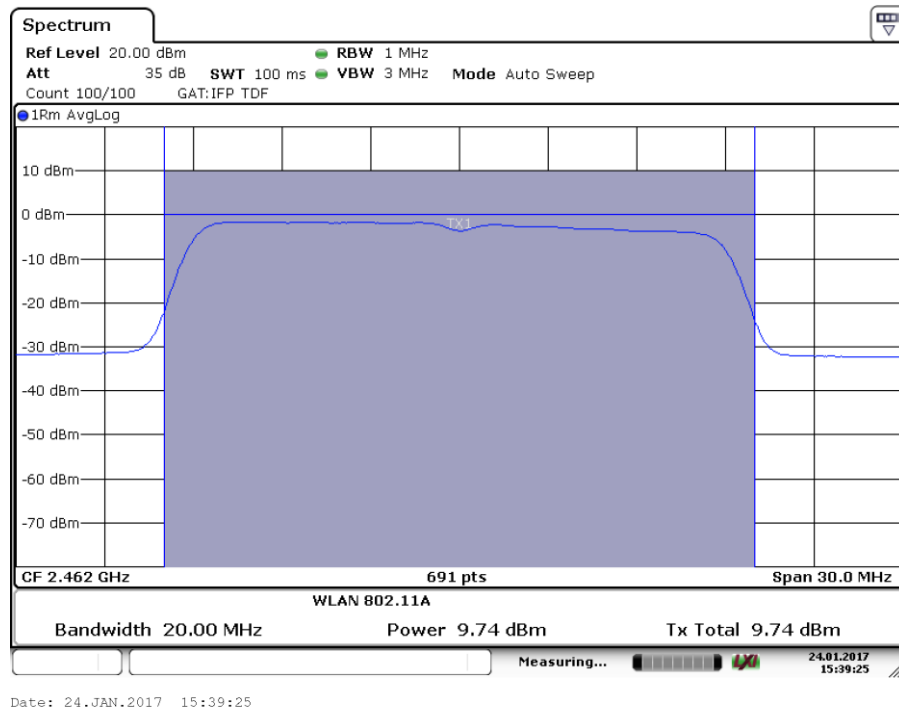


Fig.45 Maximum Average Output Power (802.11n-20MHz, Ch 11, MCS2)

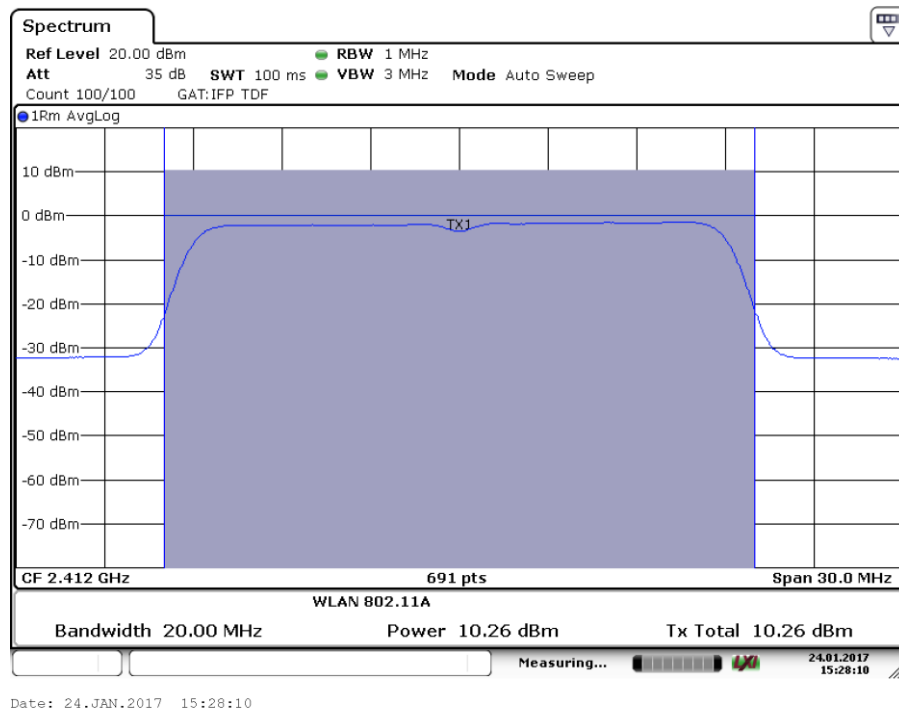


Fig.46 Maximum Average Output Power (802.11n-20MHz, Ch 1, MCS3)

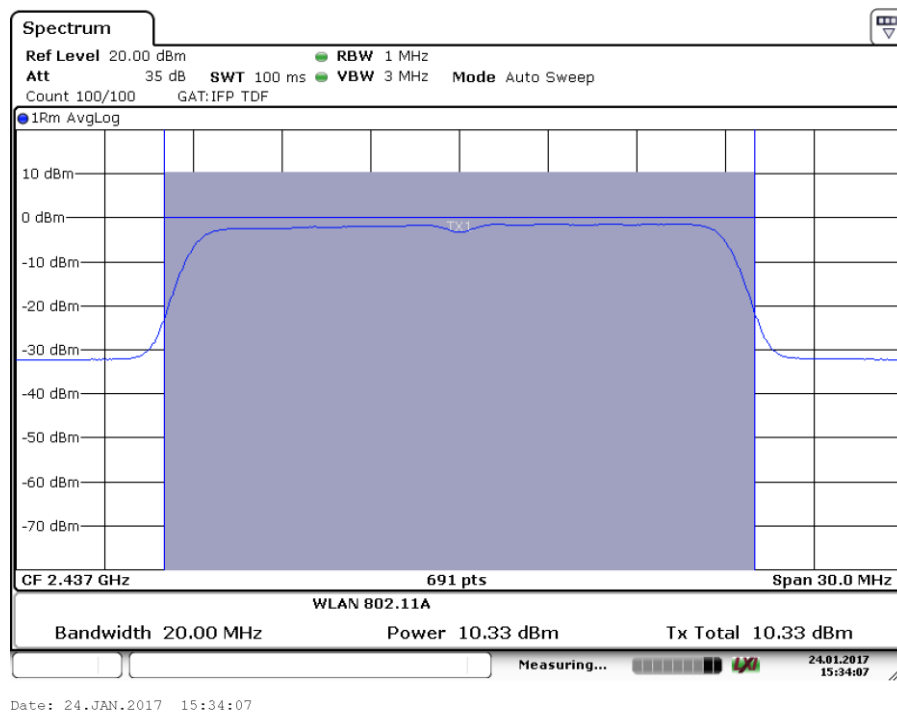


Fig.47 Maximum Average Output Power (802.11n-20MHz, Ch 6, MCS3)

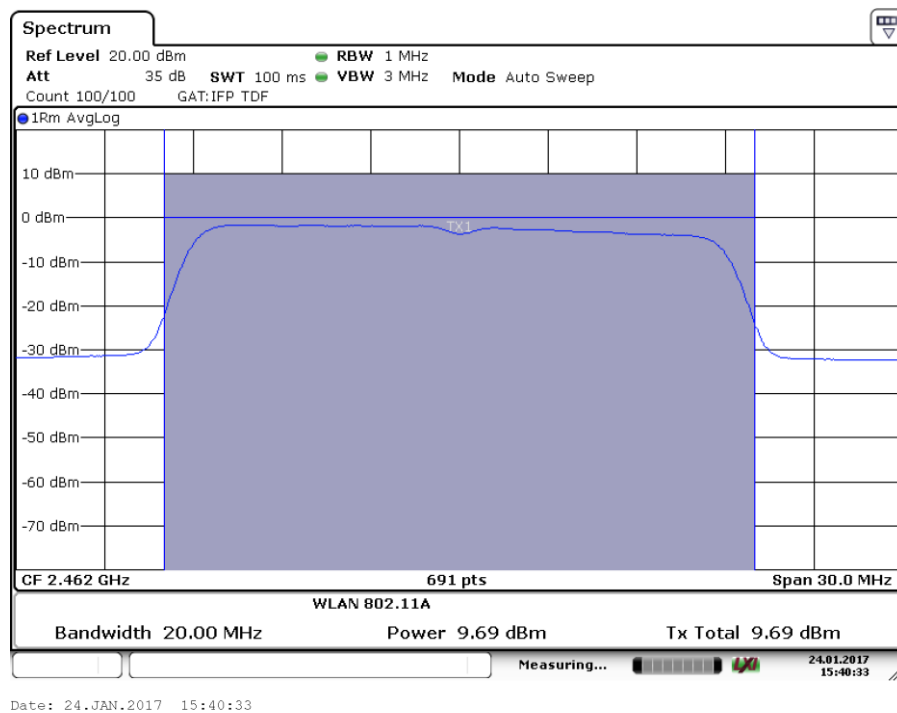


Fig.48 Maximum Average Output Power (802.11n-20MHz, Ch 11, MCS3)

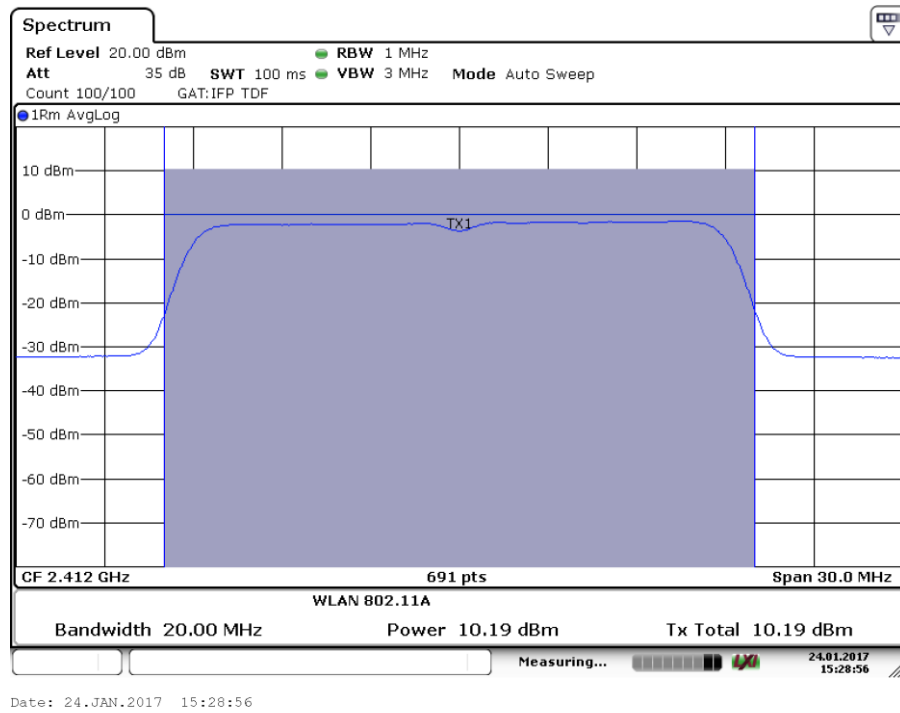


Fig.49 Maximum Average Output Power (802.11n-20MHz, Ch 1, MCS4)

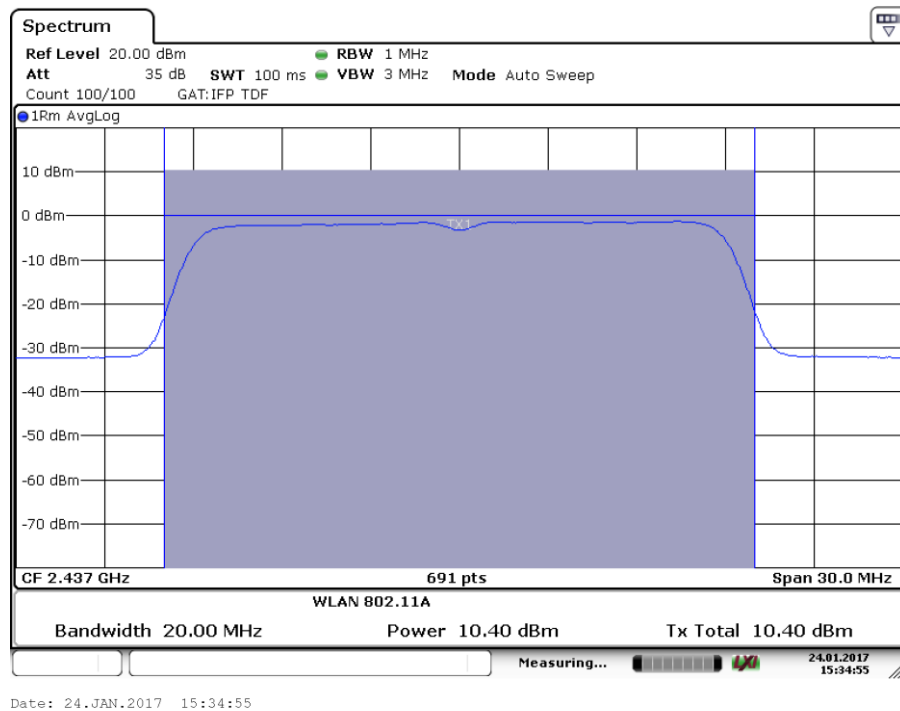


Fig.50 Maximum Average Output Power (802.11n-20MHz, Ch 6, MCS4)

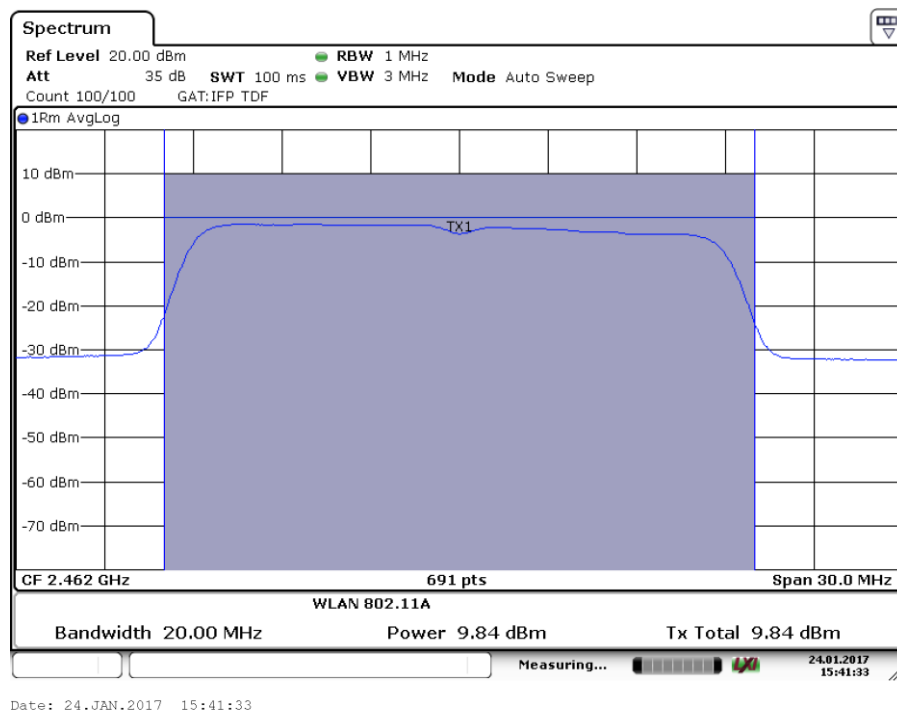


Fig.51 Maximum Average Output Power (802.11n-20MHz, Ch 11, MCS4)

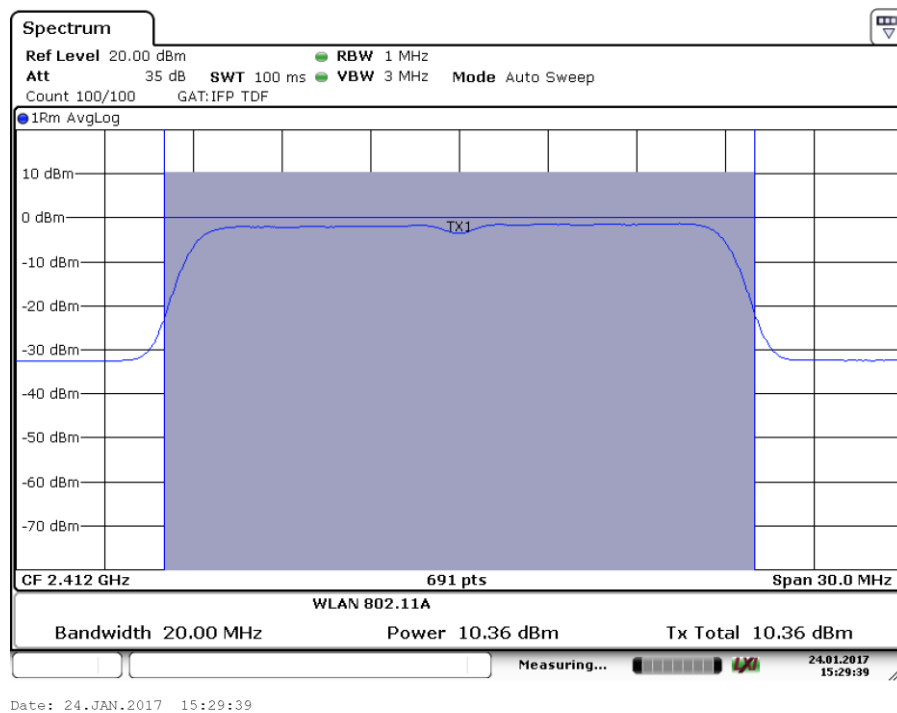


Fig.52 Maximum Average Output Power (802.11n-20MHz, Ch 1, MCS5)

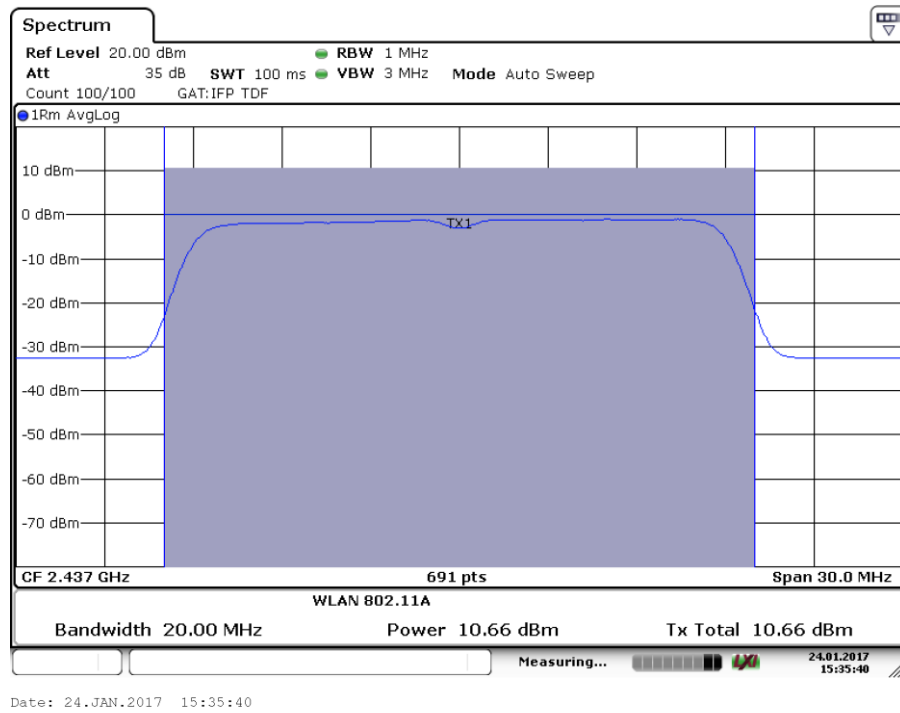


Fig.53 Maximum Average Output Power (802.11n-20MHz, Ch 6, MCS5)

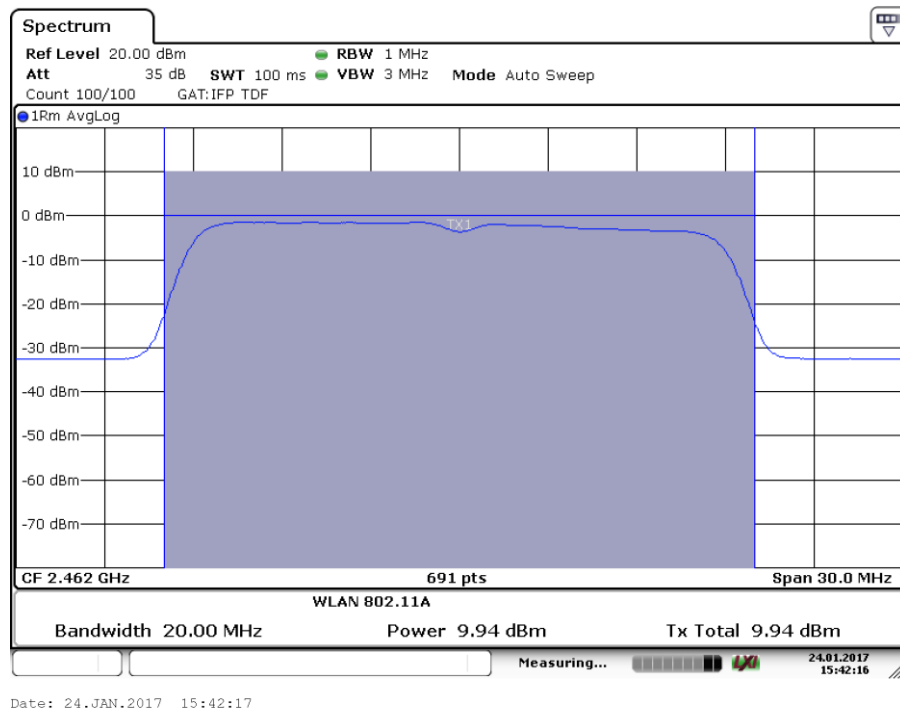


Fig.54 Maximum Average Output Power (802.11n-20MHz, Ch 11, MCS5)

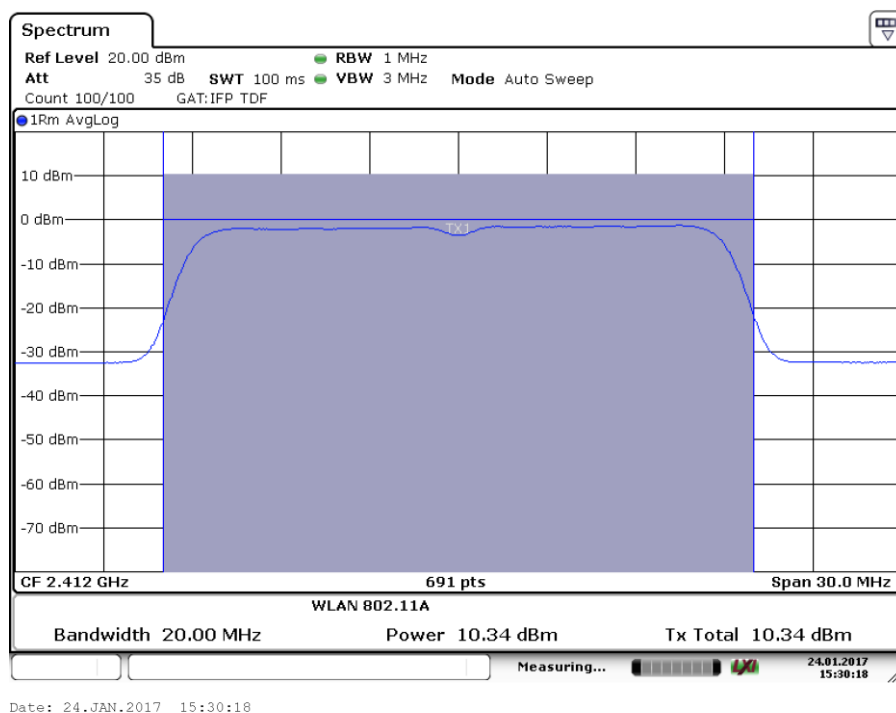


Fig.55 Maximum Average Output Power (802.11n-20MHz, Ch 1, MCS6)

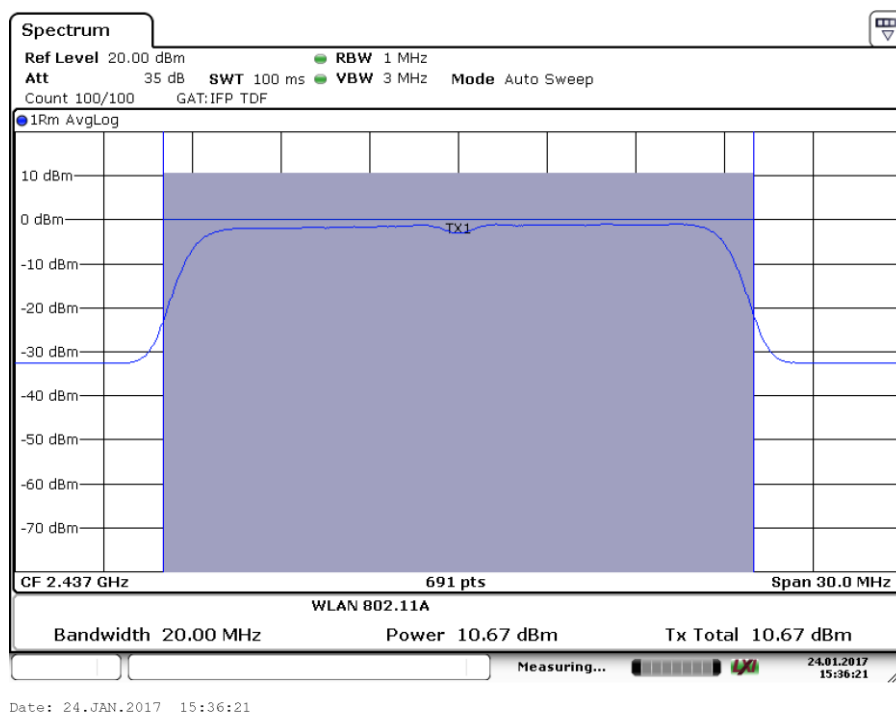


Fig.56 Maximum Average Output Power (802.11n-20MHz, Ch 6, MCS6)

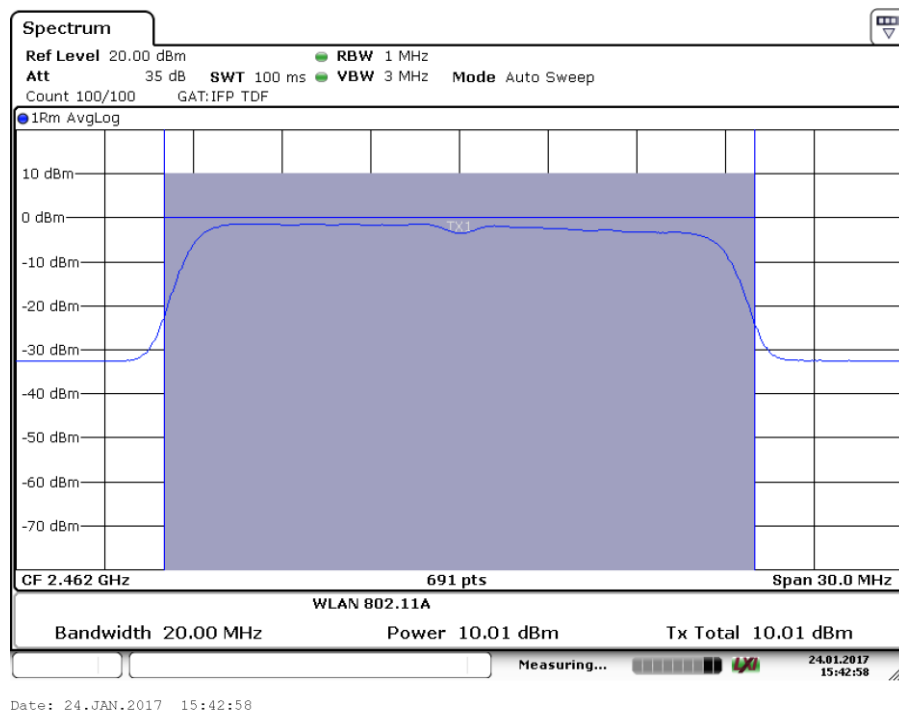


Fig.57 Maximum Average Output Power (802.11n-20MHz, Ch 11, MCS6)

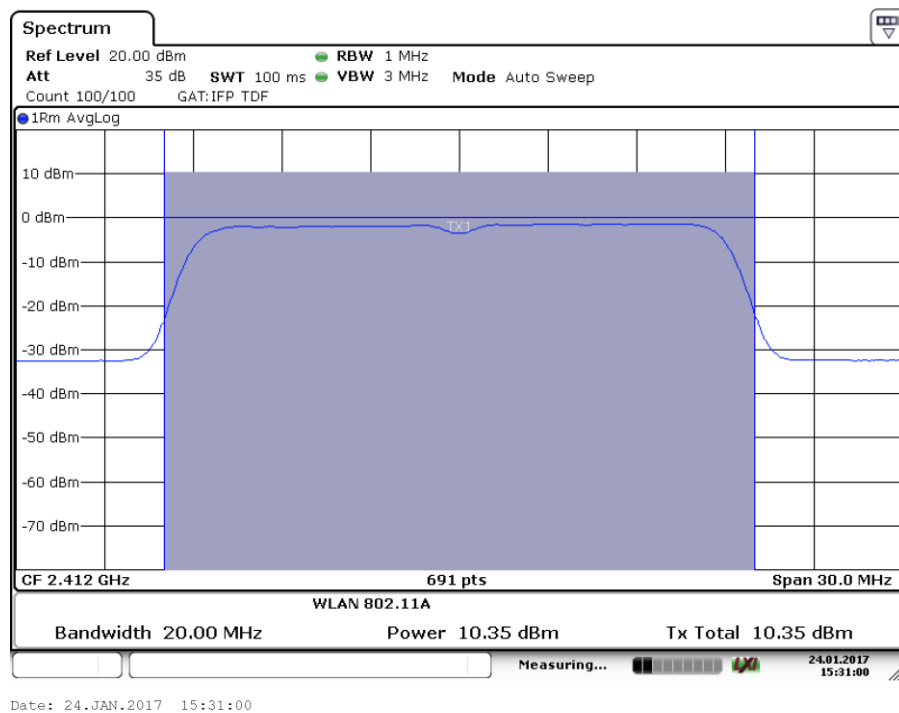


Fig.58 Maximum Average Output Power (802.11n-20MHz, Ch 1, MCS7)

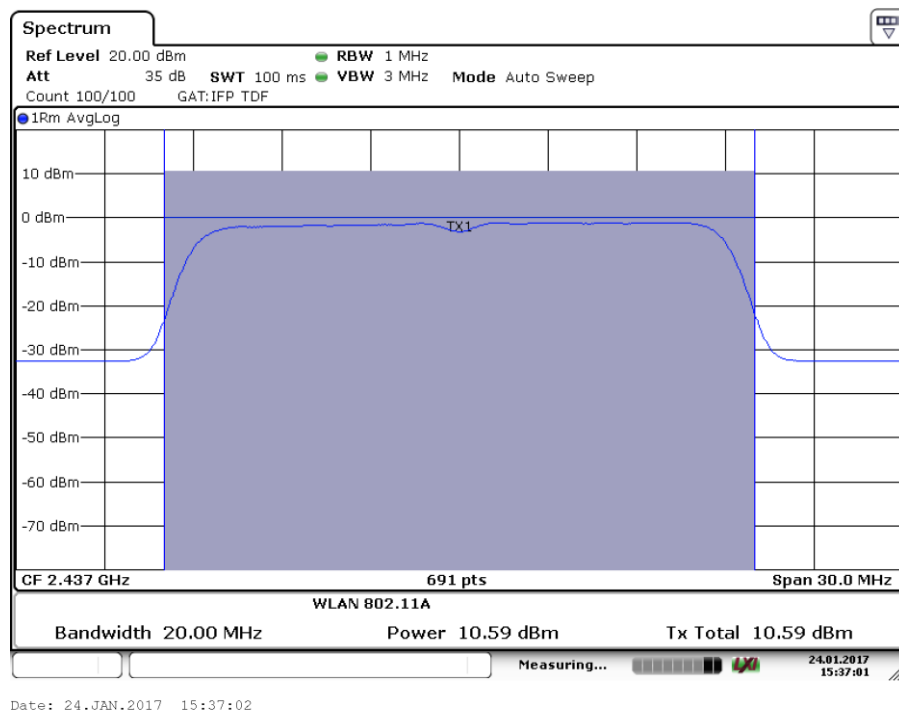


Fig.59 Maximum Average Output Power (802.11n-20MHz, Ch 6, MCS7)

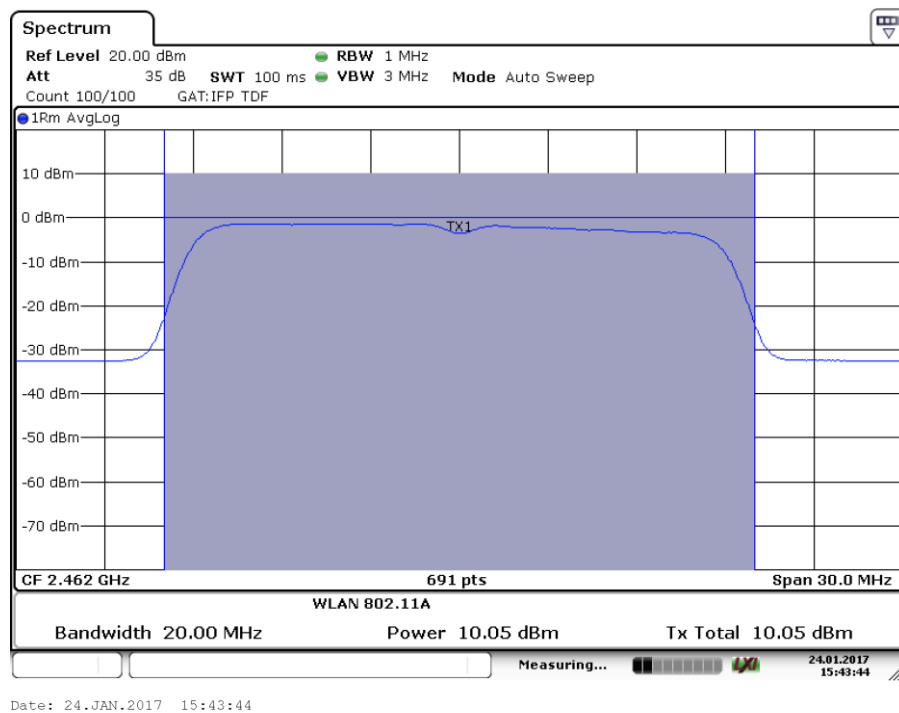


Fig.60 Maximum Average Output Power (802.11n-20MHz, Ch 11, MCS7)

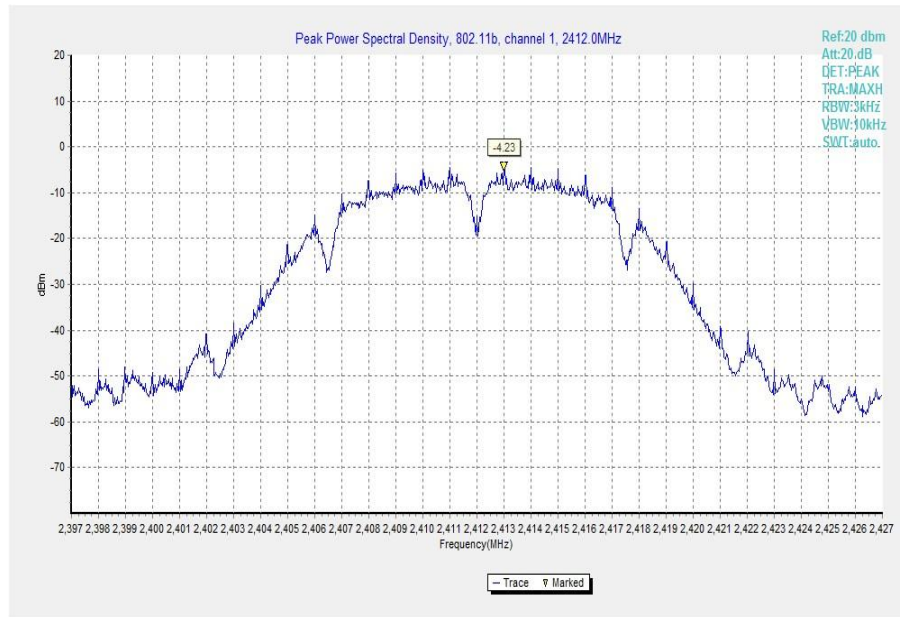


Fig.61 Power Spectral Density (802.11b, Ch 1)

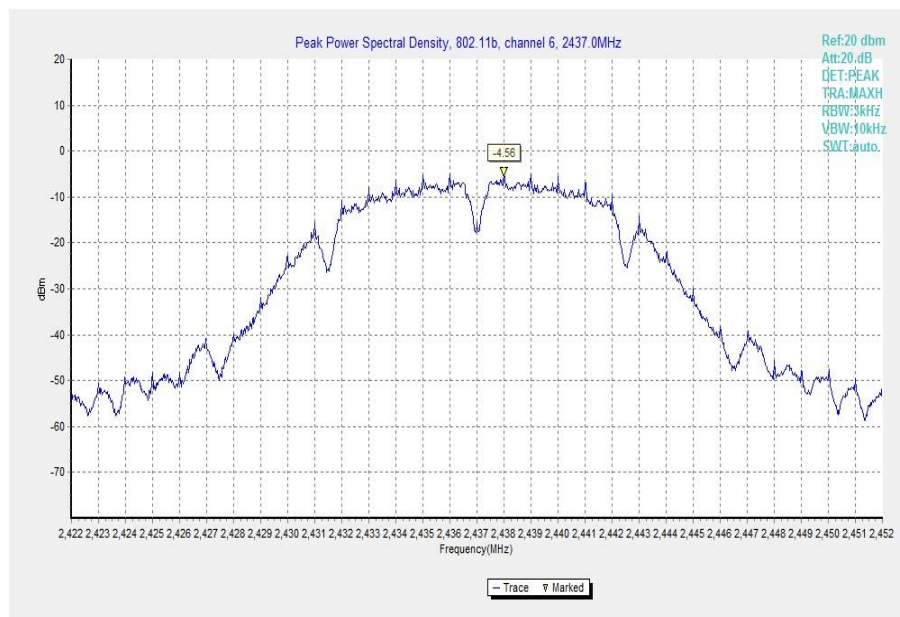


Fig.62 Power Spectral Density (802.11b, Ch 6)

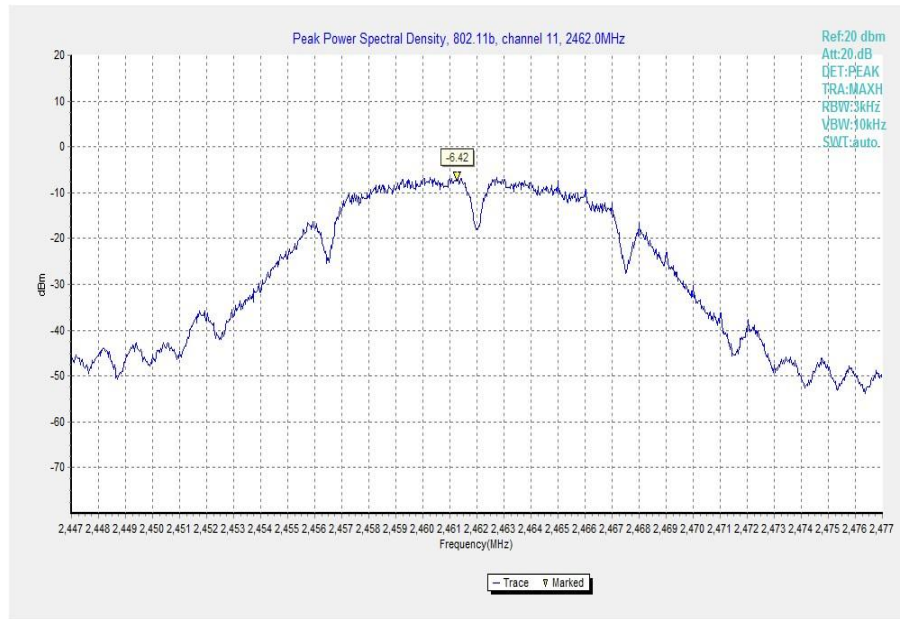


Fig.63 Power Spectral Density (802.11b, Ch 11)

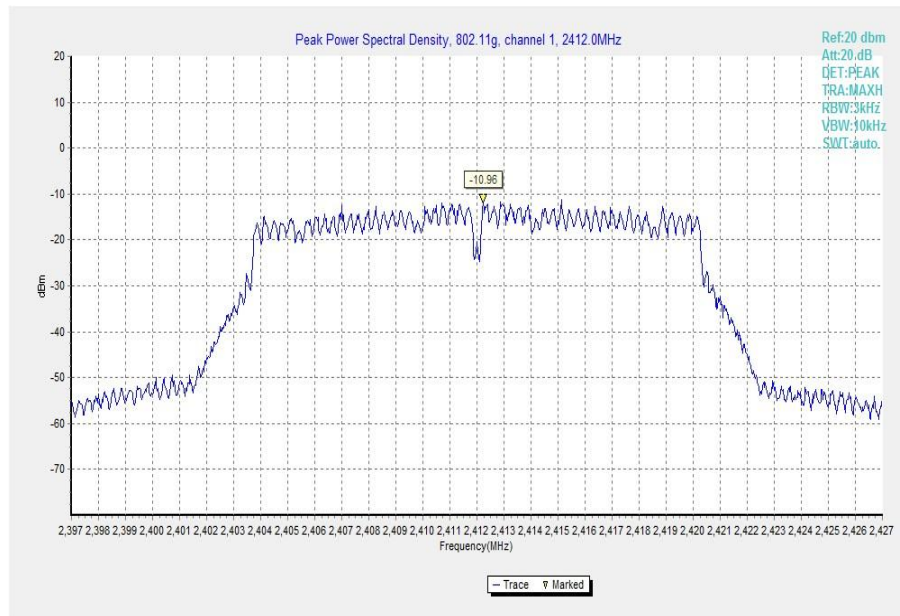


Fig.64 Power Spectral Density (802.11g, Ch 1)

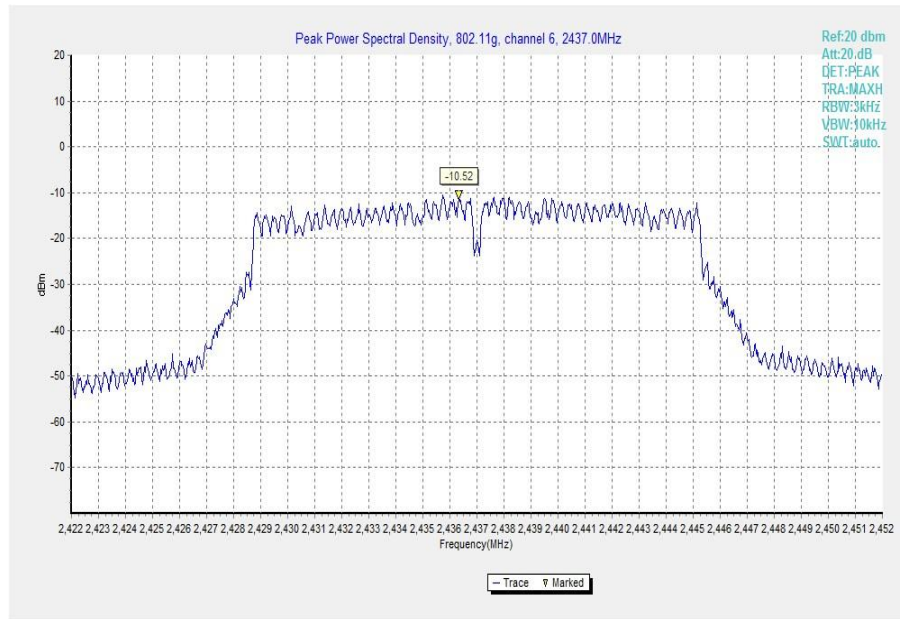


Fig.65 Power Spectral Density (802.11g, Ch 6)

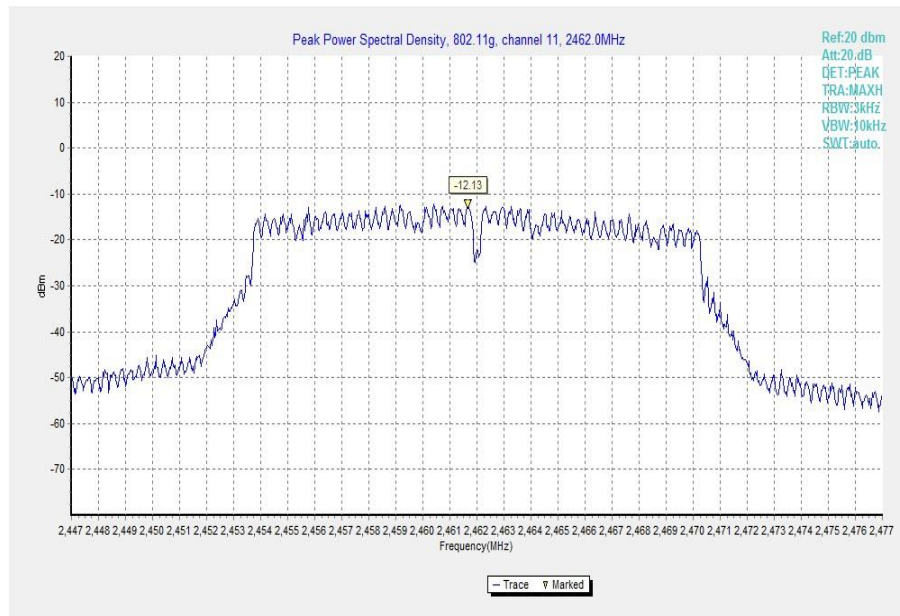


Fig.66 Power Spectral Density (802.11g, Ch 11)

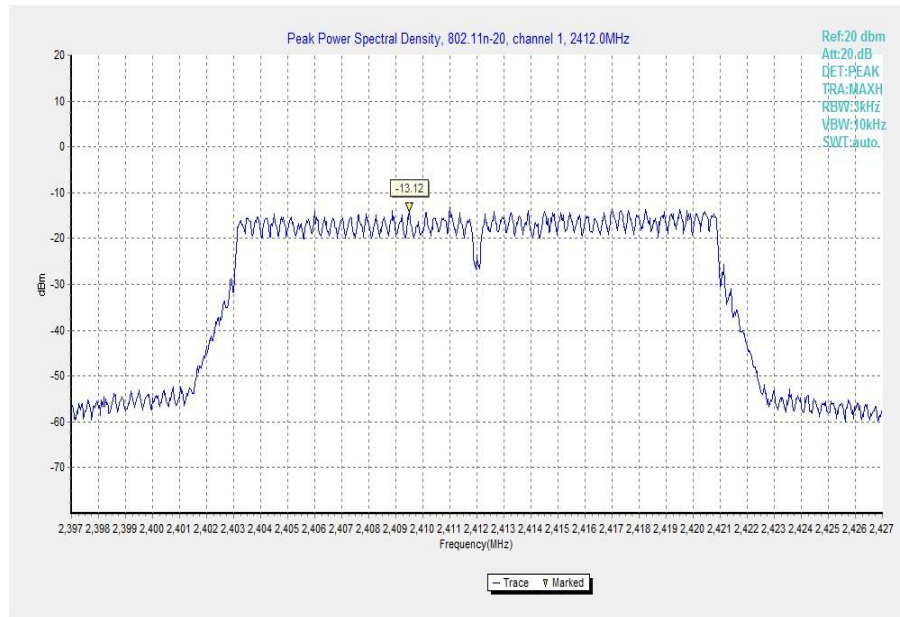


Fig.67 Power Spectral Density (802.11n-20MHz, Ch 1)

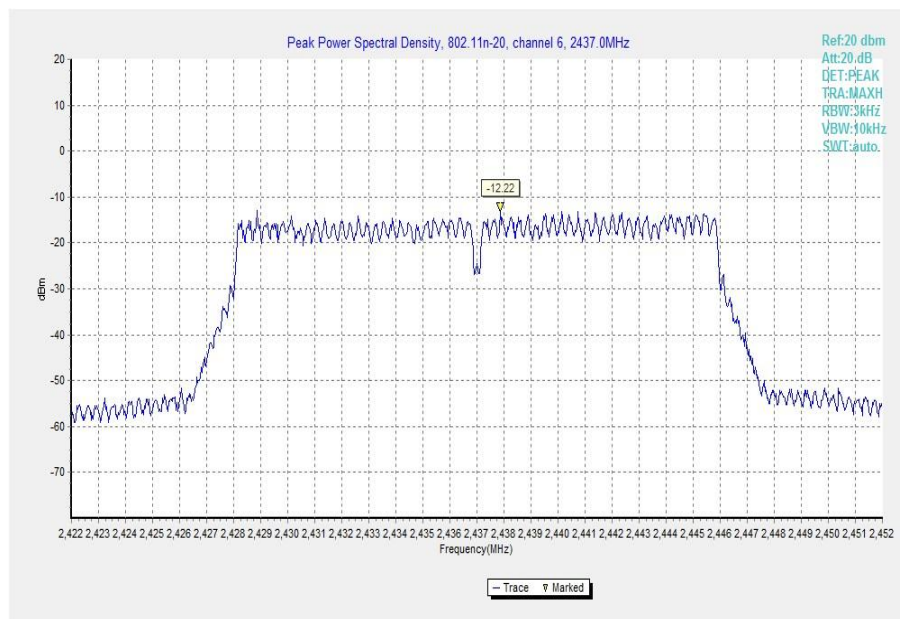


Fig.68 Power Spectral Density (802.11n-20MHz, Ch 6)

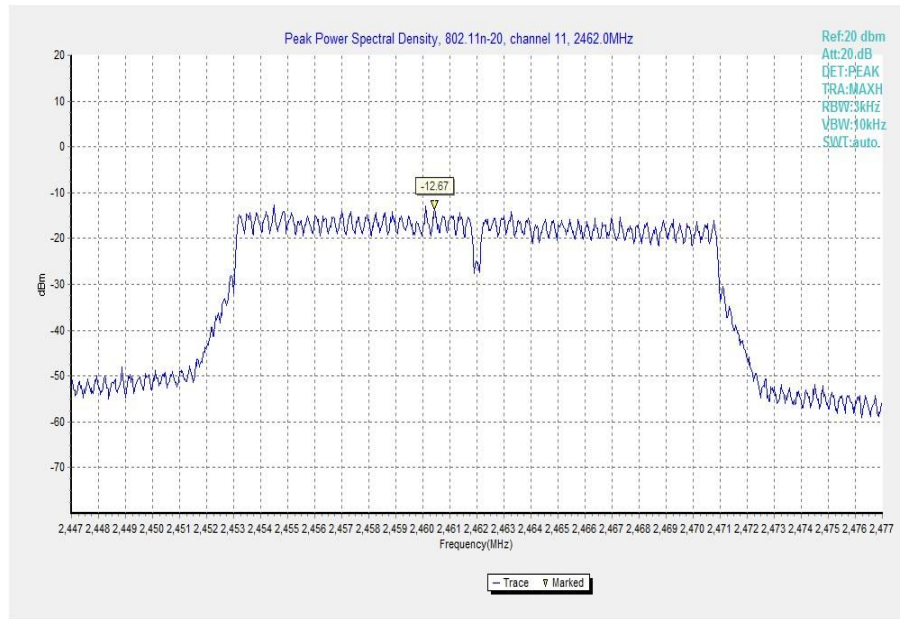


Fig.69 Power Spectral Density (802.11n-20MHz, Ch 11)

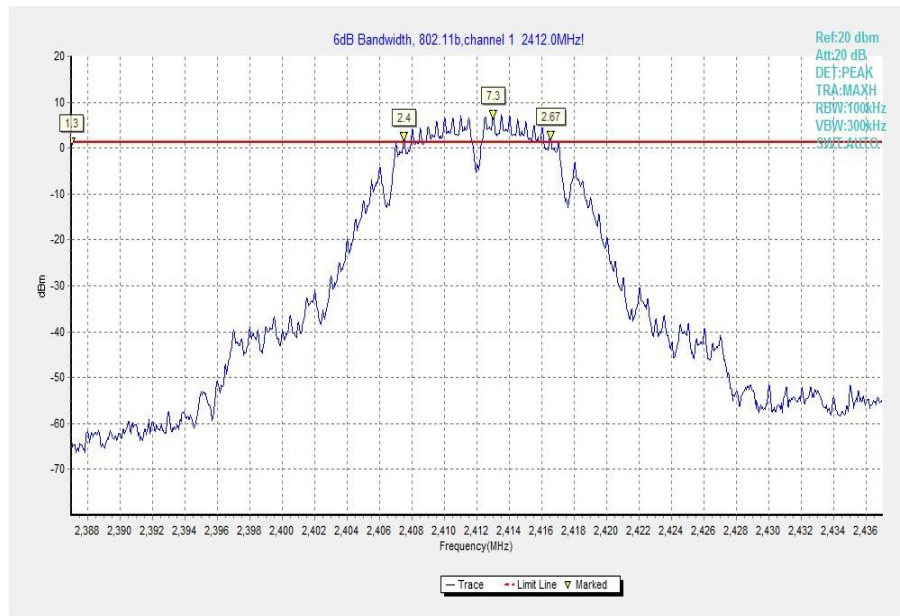


Fig.70 Occupied 6dB Bandwidth (802.11b, Ch 1)

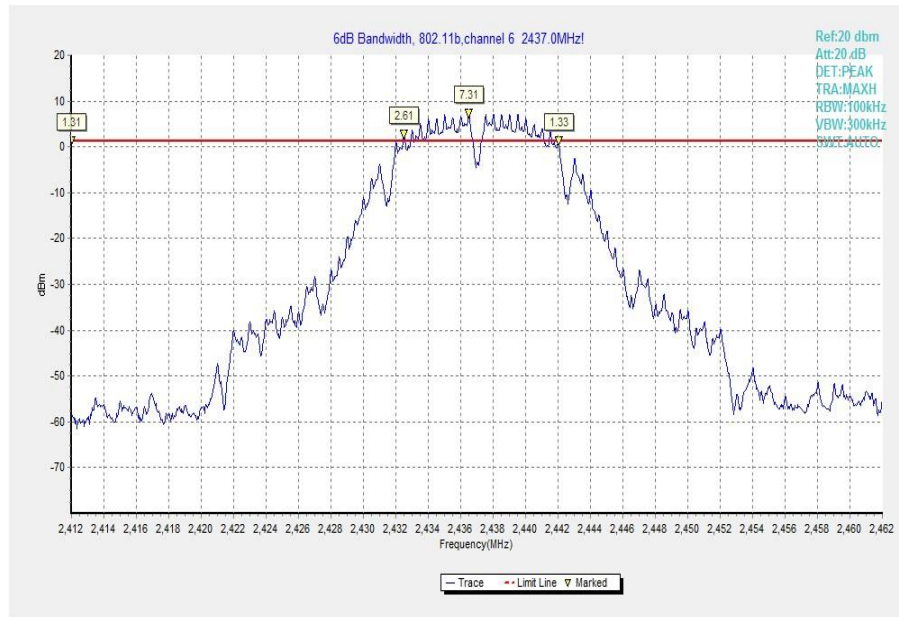


Fig.71 Occupied 6dB Bandwidth (802.11b, Ch 6)

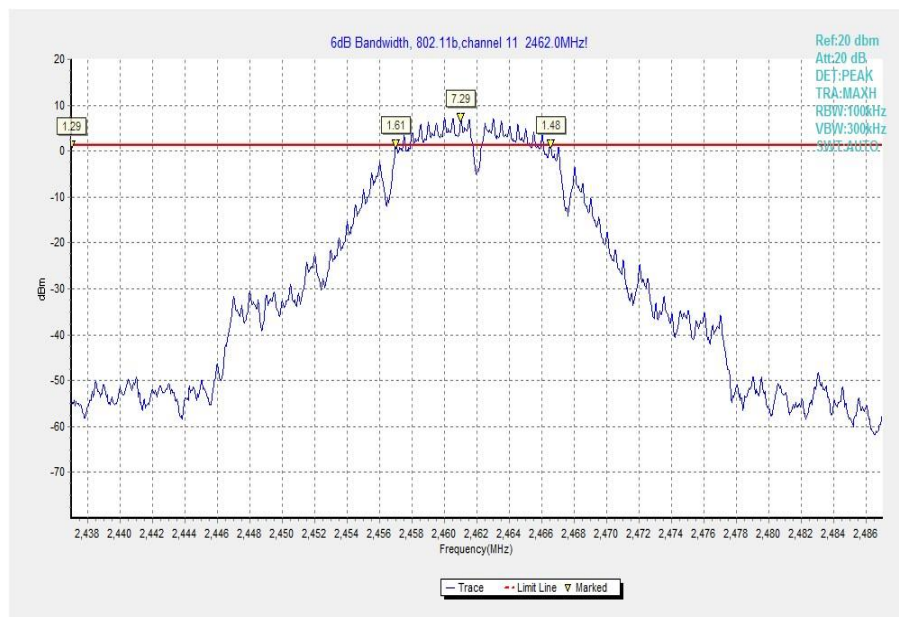


Fig.72 Occupied 6dB Bandwidth (802.11b, Ch 11)

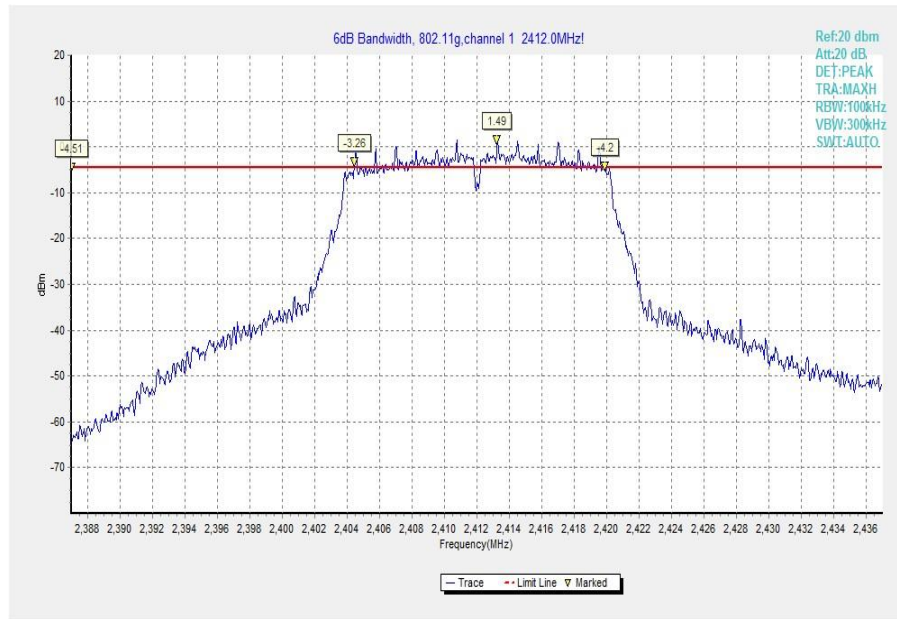


Fig.73 Occupied 6dB Bandwidth (802.11g, Ch 1)

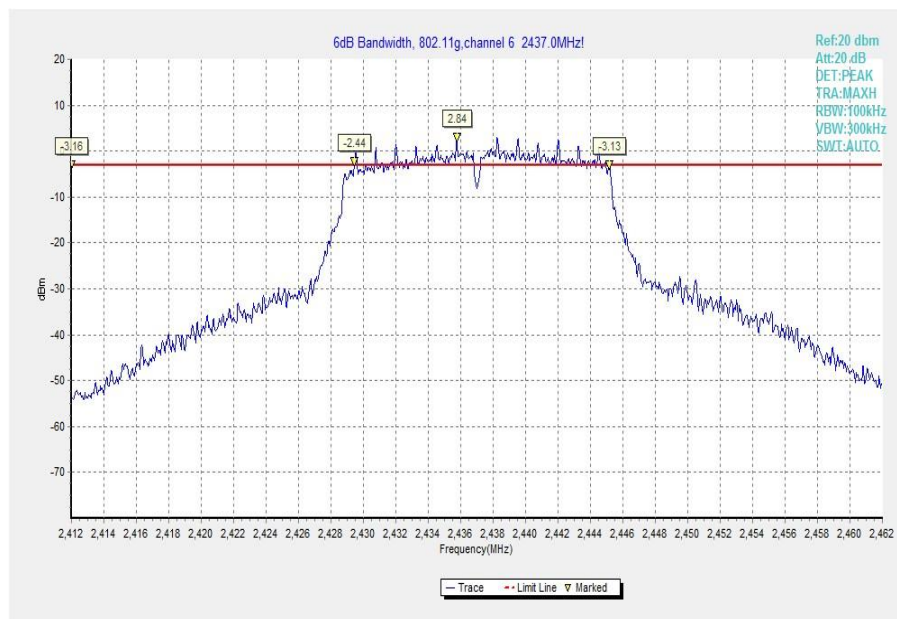


Fig.74 Occupied 6dB Bandwidth (802.11g, Ch 6)

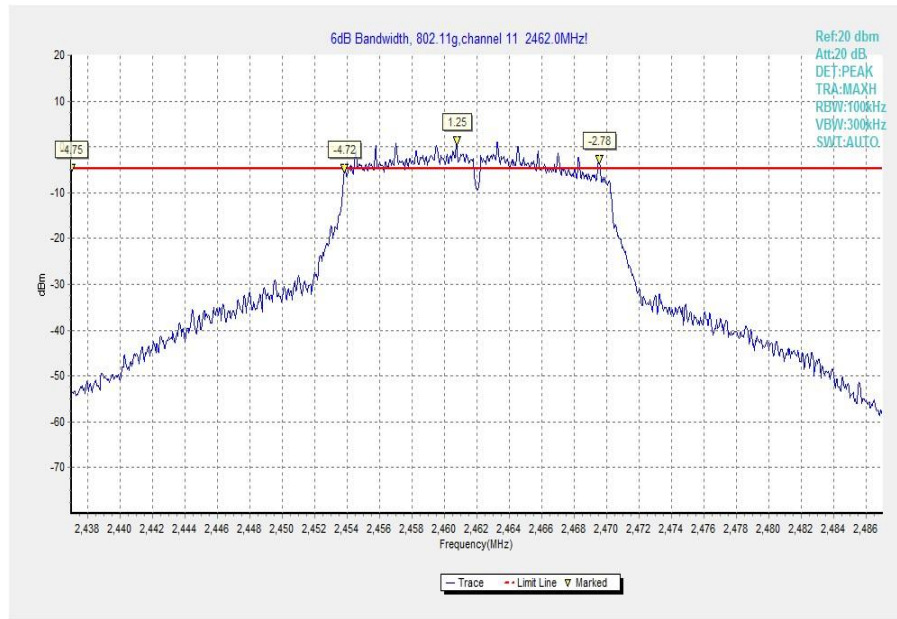


Fig.75 Occupied 6dB Bandwidth (802.11g, Ch 11)

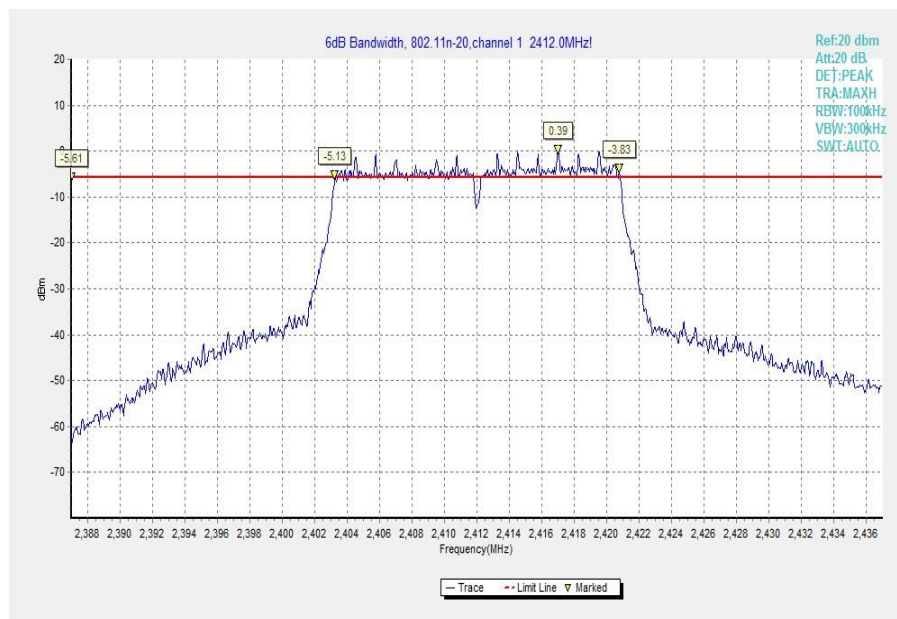


Fig.76 Occupied 6dB Bandwidth (802.11 n-20MHz, Ch 1)

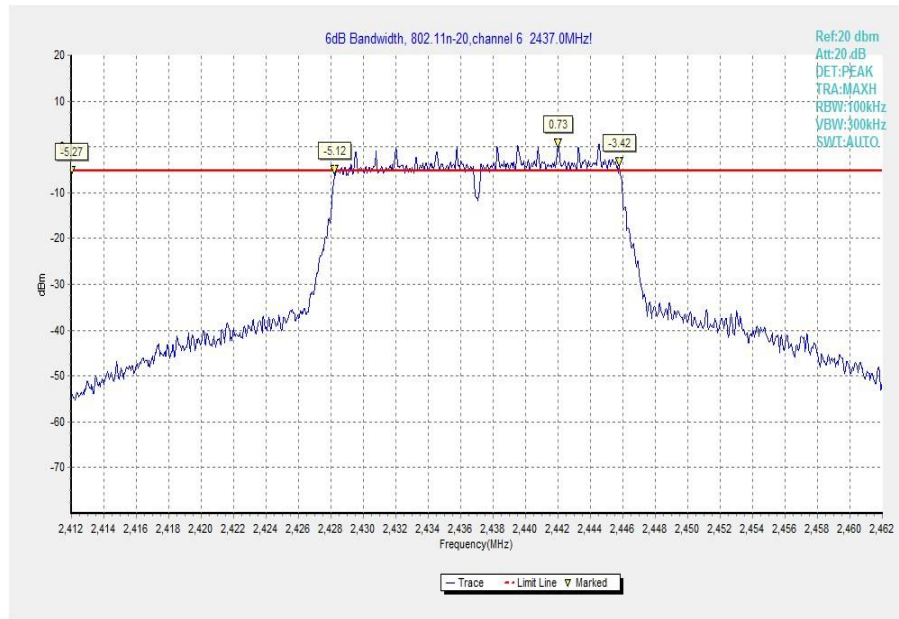


Fig.77 Occupied 6dB Bandwidth (802.11 n-20MHz, Ch 6)

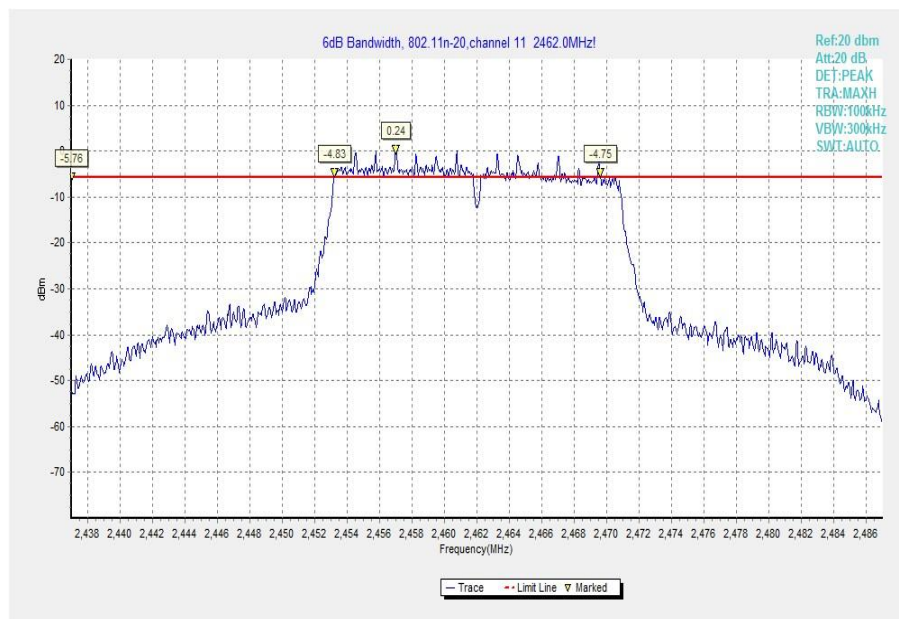


Fig.78 Occupied 6dB Bandwidth (802.11 n-20MHz, Ch 11)

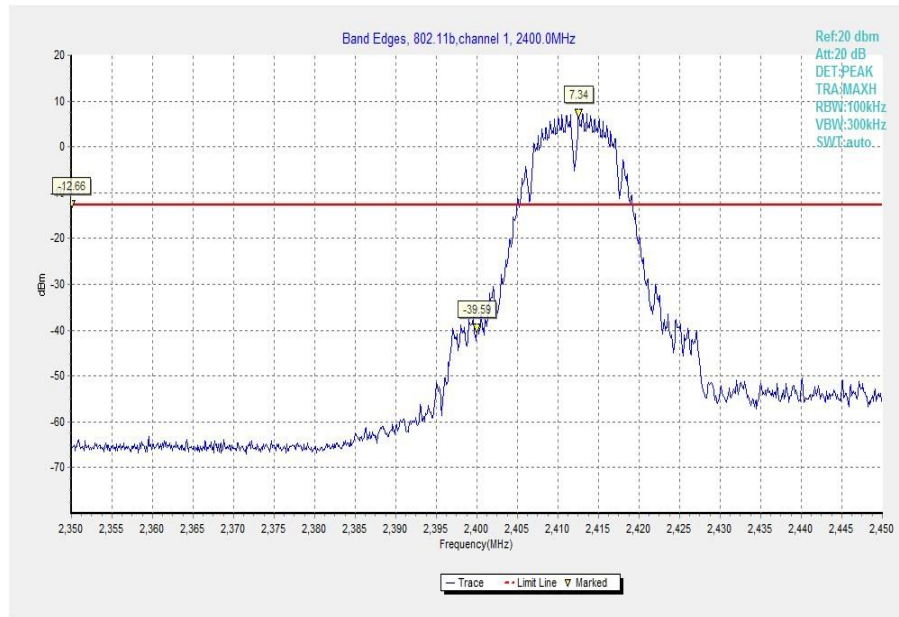


Fig.79 Band Edges (802.11b, Ch 1)

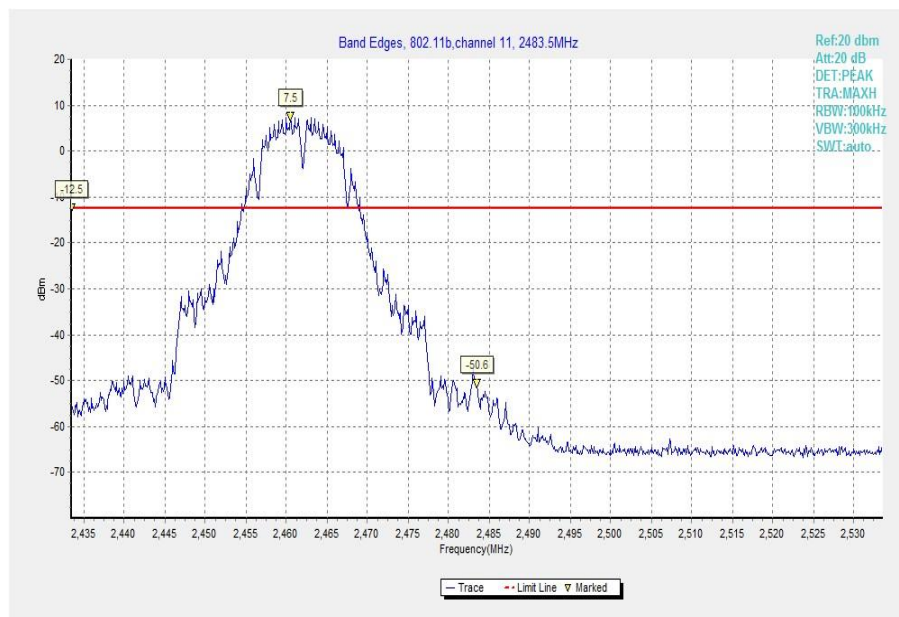


Fig.80 Band Edges (802.11b, Ch 11)

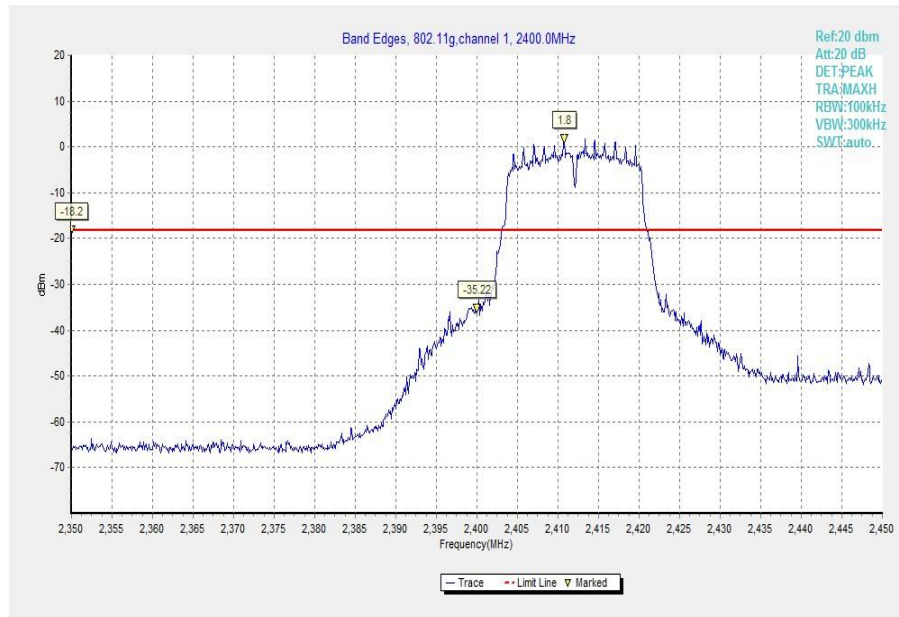


Fig.81 Band Edges (802.11g, Ch 1)

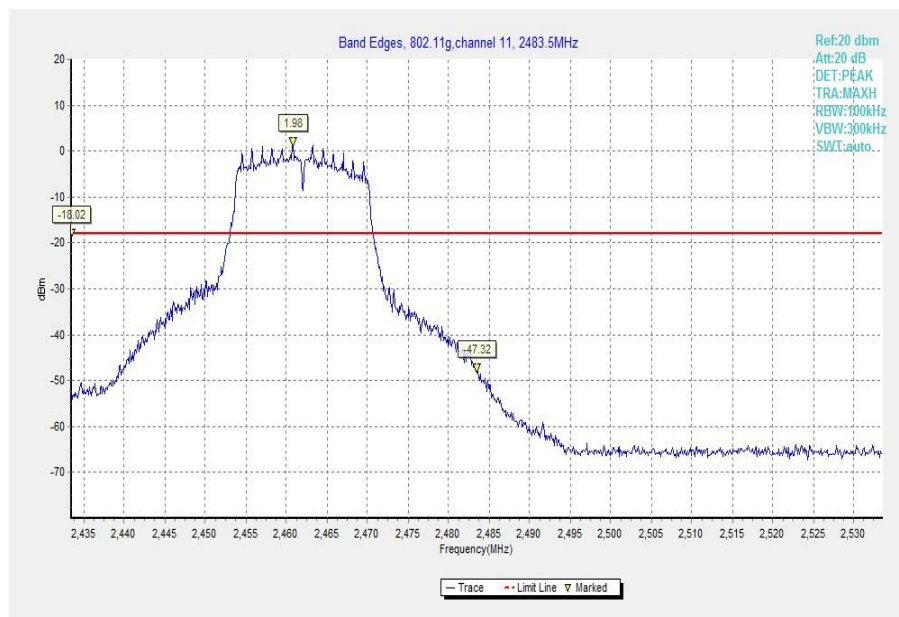


Fig.82 Band Edges (802.11g, Ch 11)

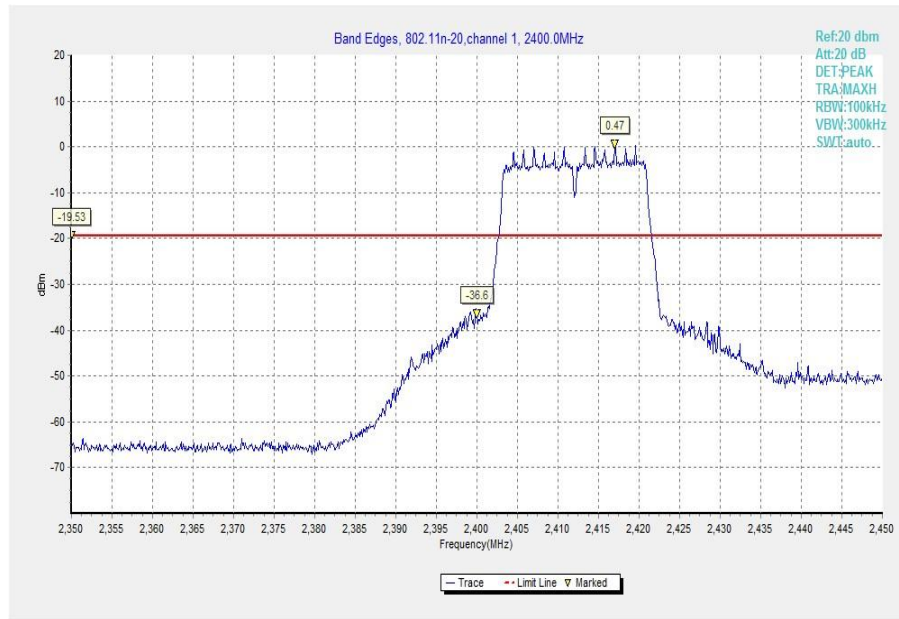


Fig.83 Band Edges (802.11 n-20MHz, Ch 1)

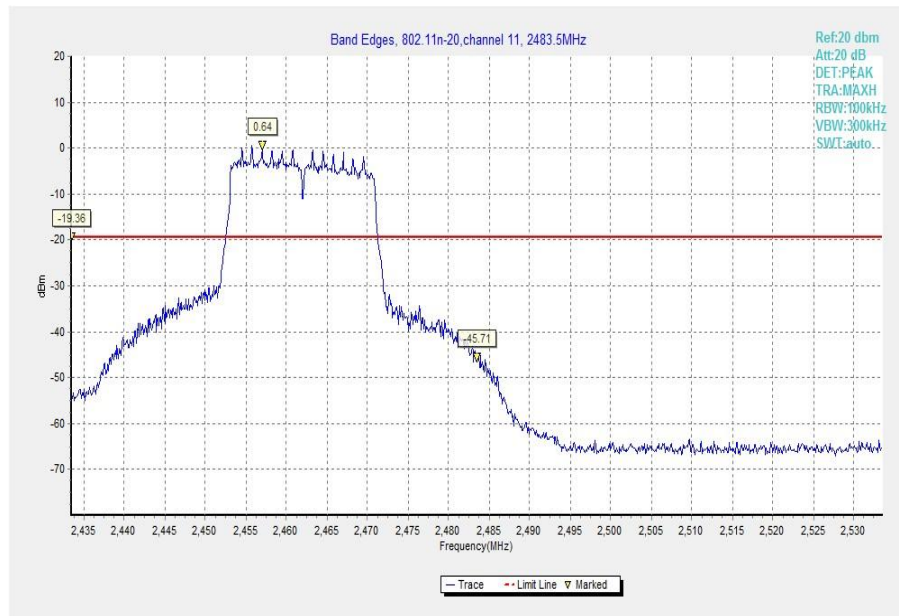


Fig.84 Band Edges (802.11 n-20MHz, Ch 11)

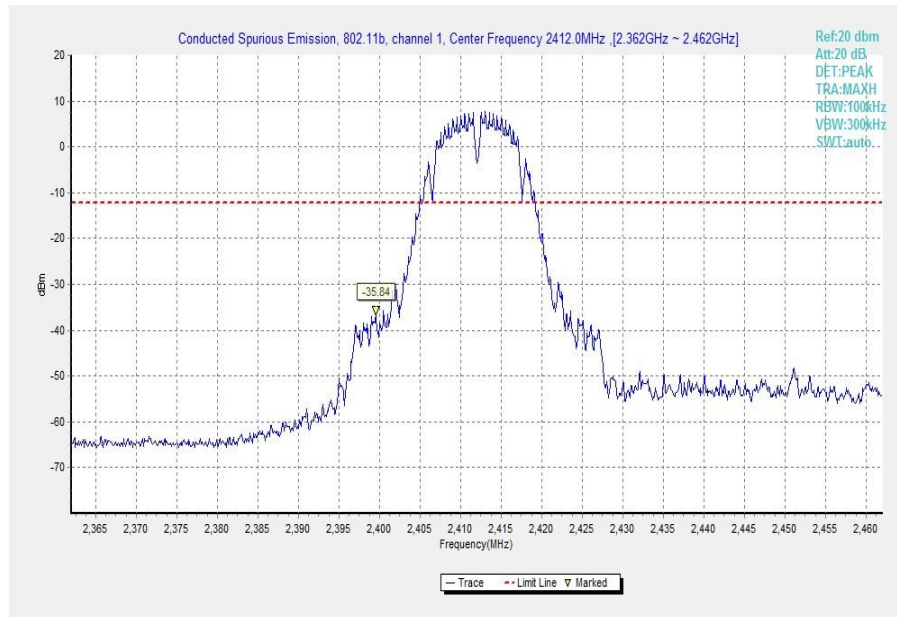


Fig.85 Conducted Spurious Emission (802.11b, Ch1, Center Frequency)

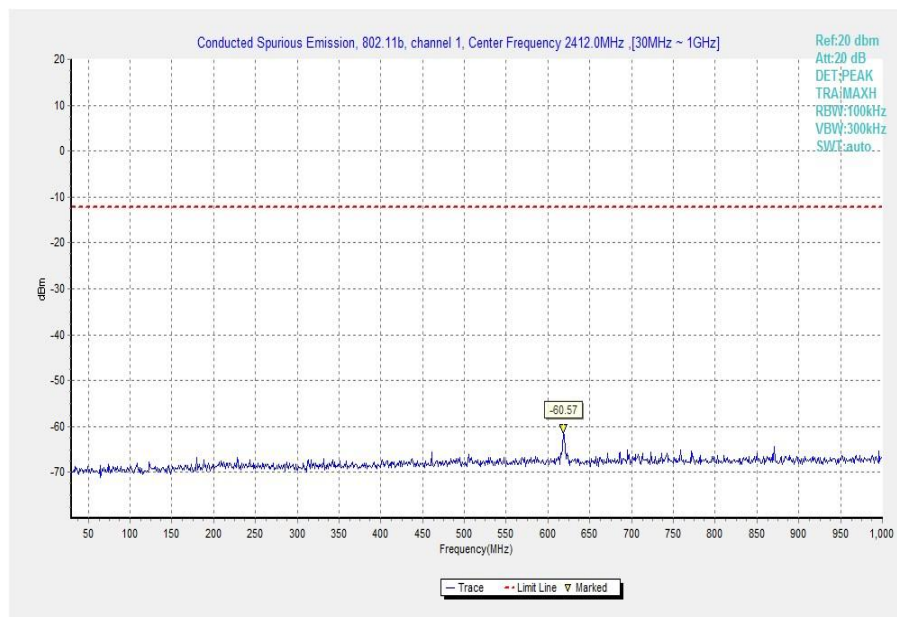


Fig.86 Conducted Spurious Emission (802.11b, Ch1, 30 MHz-1 GHz)

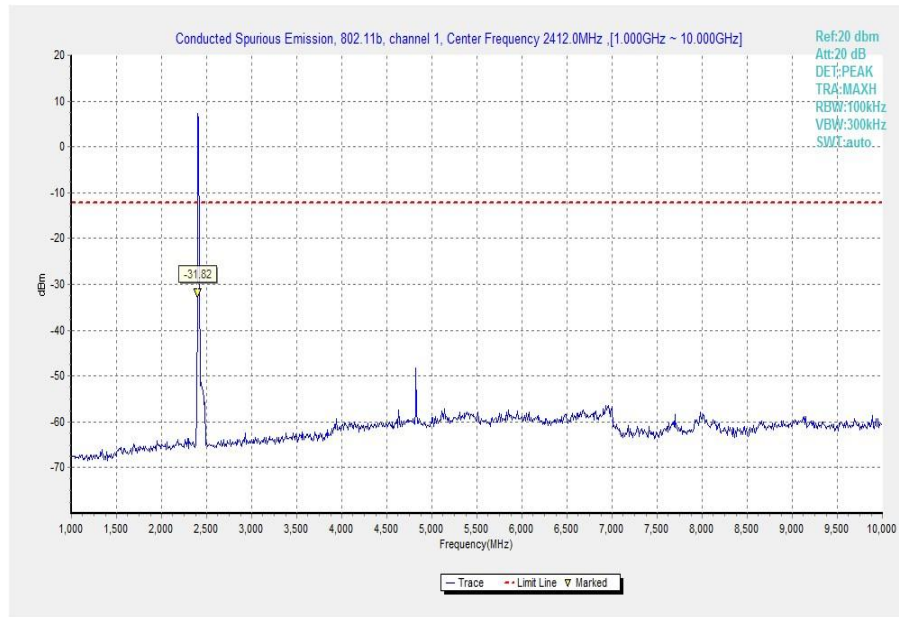


Fig.87 Conducted Spurious Emission (802.11b, Ch1, 1 GHz-10 GHz)

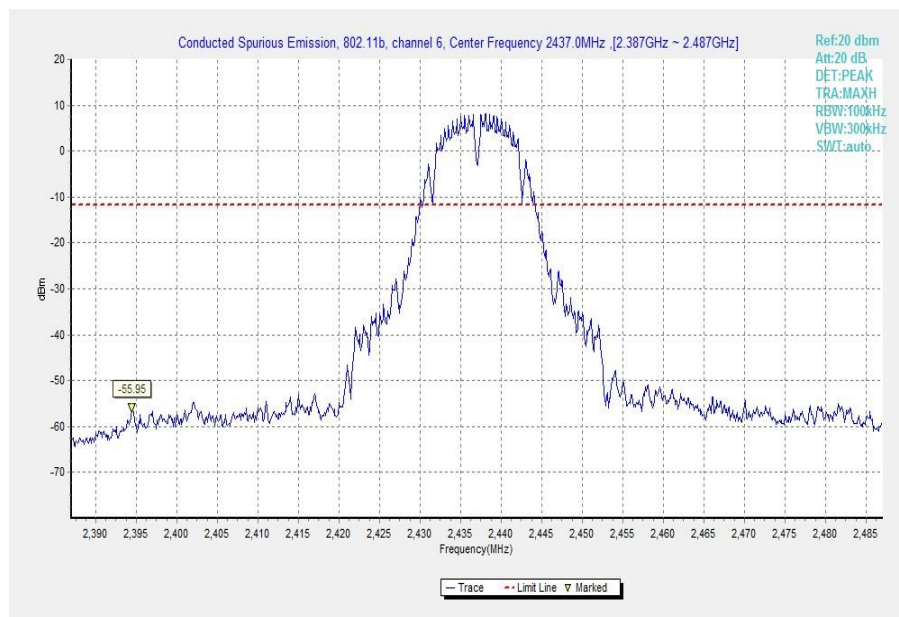


Fig.88 Conducted Spurious Emission (802.11b, Ch6, Center Frequency)