

TEST REPORT

Test report no.: 1-3325/11-02-02-A



Testing laboratory

CETECOM ICT Services GmbH

Untertuerkheimer Strasse 6 – 10

66117 Saarbruecken / Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

Internet: <http://www.cetecom.com>

e-mail: ict@cetecom.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)

The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01

Area of Testing: Radio/Satellite Communications

Applicant

FLIR Systems AB

Rinkebyvägen 19

SE-182 11 Danderyd / SWEDEN

Phone: +46 (0) 8 753 27 50

Fax: -/-

Contact: Göran Skedung

e-mail: goran.skedung@flir.se

Phone: +46 87 53 27 59

Manufacturer

FLIR Systems AB

Rinkebyvägen 19

SE-182 11 Danderyd / SWEDEN

Test standard/s

47 CFR Part 15

Title 47 of the Code of Federal Regulations; Chapter I

Part 15 - Radio frequency devices

RSS - 210 Issue 8

Spectrum Management and Telecommunications - Radio Standards Specification

Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands):

Category I Equipment

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item:

Infrared Camera

Model name:

FLIR-E49001

FCC ID:

ZLV-FLIRE49001

IC:

5306A-FLIRE49001

Frequency [MHz]:

ISM-band: 2400 MHz – 2483.5 MHz

(lowest channel 01 – 2412 MHz,

highest channel 11 – 2462 MHz)

Technology tested:

WLAN (b & g – mode)

Antenna:

Integrated antenna

Power Supply:

3.7 V DC by Li – polymer battery

Temperature Range:

20 °C



This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorised:

Marco Bertolino
Testing Manager

Test performed:

Andreas Luckenbill

1 Table of contents

1	Table of contents	2
2	General information	3
2.1	Notes and disclaimer.....	3
2.2	Application details.....	3
3	Test standard/s	3
4	Test environment.....	4
5	Test item.....	4
6	Test laboratories sub-contracted	4
7	Summary of measurement results	5
8	RF measurements.....	6
8.1	Description of test setup.....	6
8.1.1	Radiated measurements	6
8.1.2	Conducted measurements	7
8.2	Additional comments	7
8.3	RSP100 test report cover sheet / performance test data	8
9	Measurement results	9
9.1	Maximum output power (conducted).....	9
9.2	Antenna gain.....	16
9.3	Maximum output power.....	19
9.4	Power spectral density.....	21
9.5	Spectrum bandwidth of a FHSS system – 6 dB bandwidth	26
9.6	Spectrum bandwidth of a FHSS system – 20 dB bandwidth	31
9.7	Band edge compliance conducted	36
9.8	Band edge compliance radiated	39
9.9	TX spurious emissions conducted	44
9.10	TX spurious emissions radiated.....	56
9.11	RX spurious emissions radiated	73
9.12	TX spurious emissions radiated < 30 MHz.....	79
9.13	TX spurious emissions conducted < 30 MHz.....	80
10	Test equipment and ancillaries used for tests.....	84
11	Observations.....	85
Annex A	Photographs of the test setup.....	86
Annex B	External photographs of the EUT	88
Annex C	Internal photographs of the EUT	93
Annex D	Document history.....	104
Annex E	Further information	104
Annex F	Accreditation Certificate.....	105

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

2.2 Application details

Date of receipt of order:	2012-01-24
Date of receipt of test item:	2012-01-24
Start of test:	2012-01-26
End of test:	2012-01-26
Person(s) present during the test:	-/-

3 Test standard/s

Test standard	Date	Test standard description
47 CFR Part 15	2010-10	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices
RSS - 210 Issue 8	2010-12	Spectrum Management and Telecommunications - Radio Standards Specification Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

4 Test environment

Temperature:	T_{nom}	+22 °C during room temperature tests
	T_{max}	+55 °C during high temperature tests
	T_{min}	-20 °C during low temperature tests
Relative humidity content:		33 %
Barometric pressure:		not relevant for this kind of testing
Power supply:	V_{nom}	3.7 V DC by Li – polymer battery
	V_{max}	-/-
	V_{min}	-/-

5 Test item

Kind of test item	:	Infrared Camera
Type identification	:	FLIR-E49001
S/N serial number	:	Cond. 49000011 Rad. 49000002
HW hardware status	:	T198045 rev 01
SW software status	:	version 1.14.8
Frequency band [MHz]	:	ISM-band: 2400 MHz to 2483.5 MHz (lowest channel 01 – 2412, highest channel 11 – 2462)
Type of modulation	:	DSSS & OFDM technology with BPSK, QPSK, 16- and 64 QAM
Number of channels	:	11
Antenna	:	Integrated antenna
Power supply	:	3.7 V DC by Li – polymer battery
Temperature range	:	+55 °C

6 Test laboratories sub-contracted

None

7 Summary of measurement results



No deviations from the technical specifications were ascertained



There were deviations from the technical specifications ascertained

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS 210, Issue 8, Annex 8	Passed	2012-02-23	-/-

Test specification clause	Test case	Temperature conditions	Power source voltages	Mode	Pass	Fail	NA	NP	Remark
§15.247(b)(4) RSS 210 / A8.4(2)	Antenna gain	Nominal	Nominal	DSSS	☐	☐	☐	☒	Antenna pattern supplied by applicant
§15.247(e) RSS 210 / A8.2(b)	Power spectral density	Nominal	Nominal	DSSS OFDM g & n	☒ ☒	☐ ☐	☐ ☐	☐ ☐	complies
§15.247(a)(2) RSS 210 / A8.2(a)	Spectrum bandwidth of a FHSS system 6dB bandwidth	Nominal	Nominal	DSSS OFDM g & n	☒ ☒	☐ ☐	☐ ☐	☐ ☐	complies
§15.247(a)(2) RSS 210 / A8.2(a)	Spectrum bandwidth of a FHSS system 20dB bandwidth	Nominal	Nominal	DSSS OFDM g & n	☒ ☒	☐ ☐	☐ ☐	☐ ☐	complies
§15.247(b)(3) RSS-210 / A8.4(4)	Maximum output power	Nominal	Nominal	DSSS OFDM g & n	☒ ☒	☐ ☐	☐ ☐	☐ ☐	complies
§15.247(d) RSS-210 / A8.5	Band edge compliance conducted	Nominal	Nominal	DSSS OFDM g & n	☒ ☒	☐ ☐	☐ ☐	☐ ☐	complies
§15.205 RSS-210 / A8.5	Band edge compliance radiated	Nominal	Nominal	DSSS OFDM g & n	☒ ☒	☐ ☐	☐ ☐	☐ ☐	complies
§15.247(d) RSS-210 / A8.5	TX spurious emissions conducted	Nominal	Nominal	DSSS OFDM g & n	☒ ☒	☐ ☐	☐ ☐	☐ ☐	complies
§15.247(d) RSS-210 / A8.5	TX spurious emissions radiated	Nominal	Nominal	DSSS OFDM g & n	☒ ☒	☐ ☐	☐ ☐	☐ ☐	complies
§15.109 RSS-Gen.	RX spurious emissions radiated	Nominal	Nominal	-/-	☒	☐	☐	☐	complies
§15.209(a) RSS-Gen	TX spurious emissions radiated < 30 MHz	Nominal	Nominal	DSSS OFDM g & n	☐ ☐	☐ ☐	☐ ☐	☒ ☒	-/-
§15.207(a)	Conducted emissions < 30 MHz	Nominal	Nominal	DSSS OFDM g & n	☒ ☒	☐ ☐	☐ ☐	☐ ☐	complies

Note: NA = Not Applicable; NP = Not Performed

8 RF measurements


8.1 Description of test setup

8.1.1 Radiated measurements

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 25 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63.2-1996 clause 15 and ANSI C63.4-2003 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63-4-2003 clause 4.2.

Antennas are confirmed with ANSI C63.2-1996 item 15.

Semi anechoic chamber

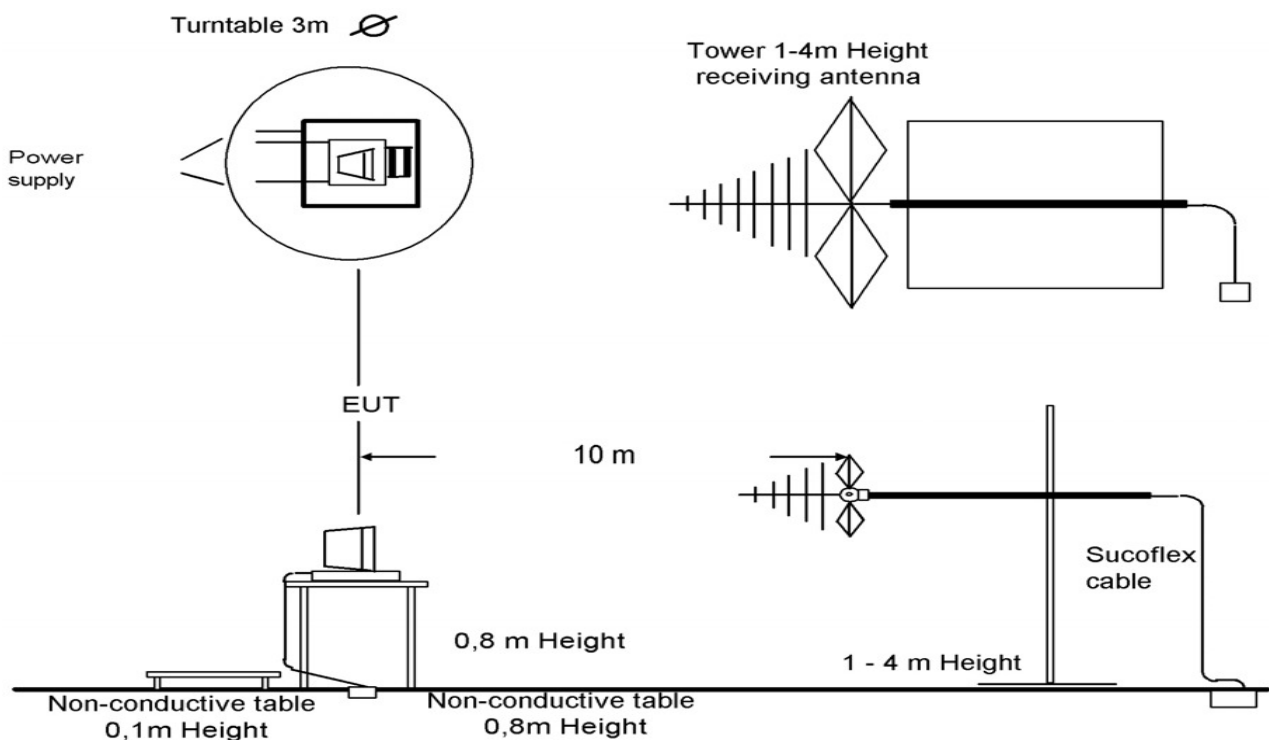


Picture 1: Diagram radiated measurements

9 kHz - 30 MHz:	active loop antenna
30 MHz – 1 GHz:	tri-log antenna
> 1 GHz:	horn antenna

The EUT is powered by an external power supply with nominal voltage. The signaling is performed from outside the chamber with a signaling unit (CMU200 or other) by air link using signaling antenna.

8.1.2 Conducted measurements

The EUT's RF signal is coupled out by the antenna connector which is supplied by the manufacturer. The signal is first 10dB attenuated before it is power divided (~6dB loss per branch). One of the signal paths is connected to the communication base Station (CMU200 or other), the other one is connected to the spectrum analyzer. The specific losses for both signal paths are first checked within a calibration. The measurement readings on the signaling unit/spectrum analyzer are corrected by the specific test set-up loss. The attenuator, power divider, signaling unit and the spectrum analyzer are impedance matched on 50 Ohm.

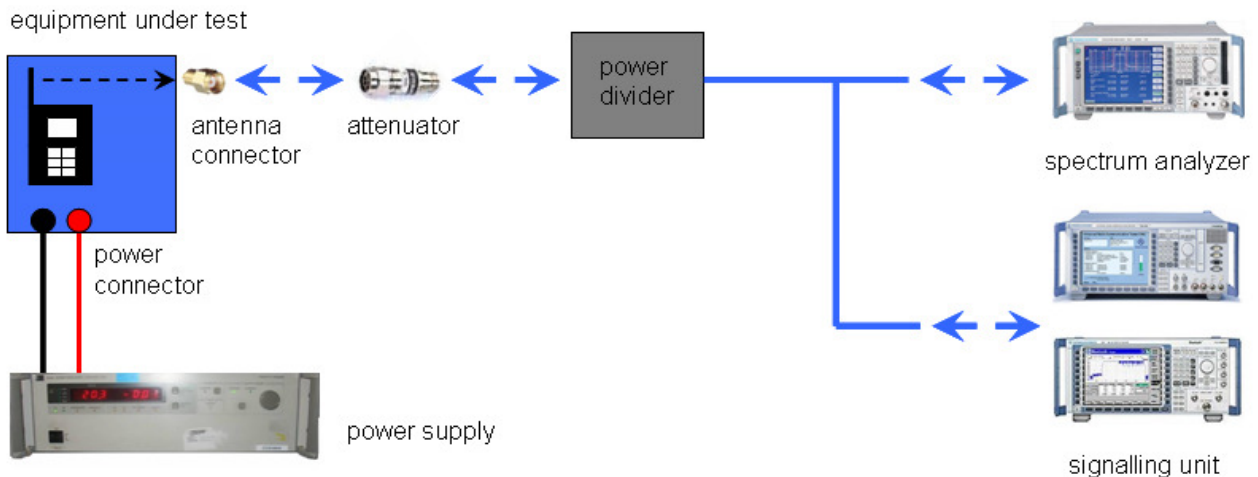

Picture 2: Diagram conducted measurements

8.2 Additional comments

Reference documents: None

Special test descriptions: None

Configuration descriptions: None

Test mode:

- ☐ No test mode available.
lperf was used to ping another device with the largest support packet size
- ☒ Special software is used.
EUT is transmitting pseudo random data by itself

8.3 RSP100 test report cover sheet / performance test data

Test report number	:	1-3325/11-02-02-A
Equipment model number	:	FLIR-E49001
Certification number	:	5306A-FLIRE49001
Manufacturer (complete address)	:	FLIR Systems AB Rinkebyvägen 19 SE-182 11 Danderyd / SWEDEN
Tested to radio standards specification no.	:	RSS 210, Issue 8, Annex 8
Open area test site IC No.	:	IC 3462C-1
Frequency range	:	ISM band 2400 MHz to 2483.5 MHz (lowest channel 2412 MHz, highest channel 2462 MHz)
RF-power [W] (max.)	:	cond.: 37.07 mW (DSSS) 34.20 mW (OFDM) EIRP: 11.43 mW (DSSS) 11.99 mW (OFDM)
Occupied bandwidth (99%-BW)	:	DSSS: 15.58 MHz OFDM: 19.28 MHz
Type of modulation	:	DSSS & OFDM technology with BPSK, QPSK, 16- and 64 QAM modulation.
Emission designator (TRC-43)	:	15M6G1D (DSSS) 19M3G7D (OFDM)
Antenna information	:	Integrated antenna
Transmitter spurious (worst case) [dBμV/m @ 3m]:		45 @ 10 GHz (noise floor)
Receiver spurious (worst case) [dBμV/m @ 3m]:		45 @ 10 GHz (noise floor)

ATTESTATION:

DECLARATION OF COMPLIANCE:

I attest that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned Industry Canada standard(s); and that the equipment identified in this application has been subjected to all the applicable test conditions specified in the Industry Canada standards and all of the requirements of the standard have been met.

Laboratory manager:

2012-02-23

Date

Andreas Luckenbill

Name



Signature

9 Measurement results

9.1 Maximum output power (conducted)

Description:

Measurement of the maximum output power conducted. This measurement is performed only at the middle channel in both modes and all data rates to determine the data rate per mode which results in the highest output power. This mode will be selected for all further measurements.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	30 MHz
Resolution bandwidth:	20 MHz
Span:	50 MHz
Trace-Mode:	Max Hold

Results:

DSSS / b – mode Data Rate [MBit/s]	Maximum Output Power Conducted [dBm]			
	1	2	5.5	11
Ch 6 - 2437 MHz	15.58	15.11	15.69	15.58
Measurement uncertainty	± 1.5 dB			

OFDM / g – mode Data Rate [MBit/s]	Maximum Output Power Conducted [dBm]							
	6	9	12	18	24	36	48	54
Ch 6 - 2437 MHz	15.34	14.93	14.78	14.98	15.34	14.98	15.06	10.24
Measurement uncertainty	± 1.5 dB							

Result: Selected data rate for all measurements:

DSSS / b – mode:


1 MBit/s

OFDM / g – mode:

6 MBit/s


Plots: DSSS / b – mode

Plot 1: TX mode, middle channel, 1 MBit/s

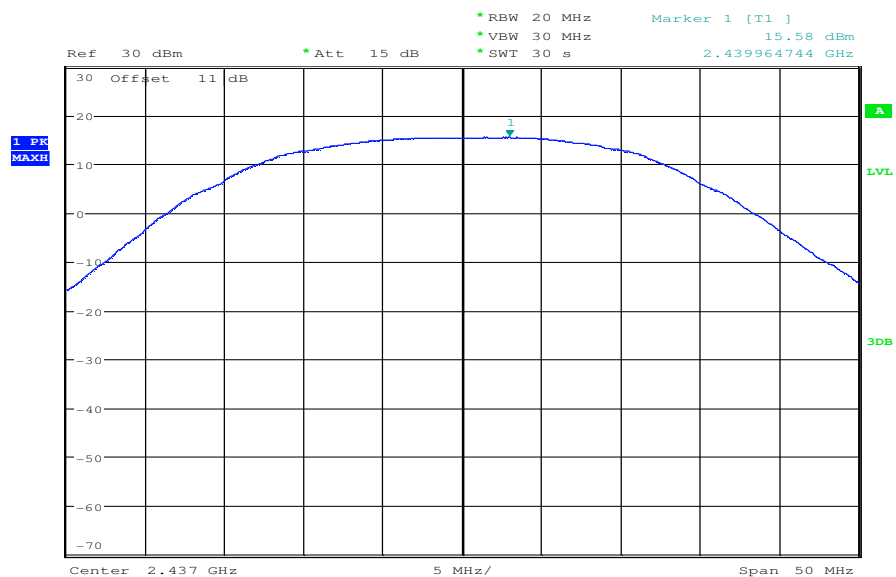


Date: 25.JAN.2012 09:21:21

Plot 2: TX mode, middle channel, 2 MBit/s

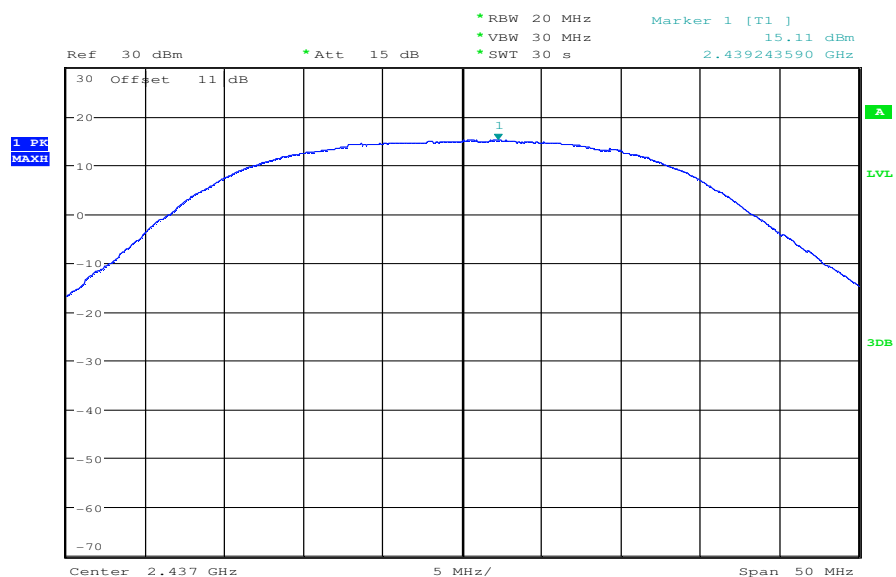


Date: 25.JAN.2012 09:22:51

Plot 3: TX mode, middle channel, 5.5 MBit/s

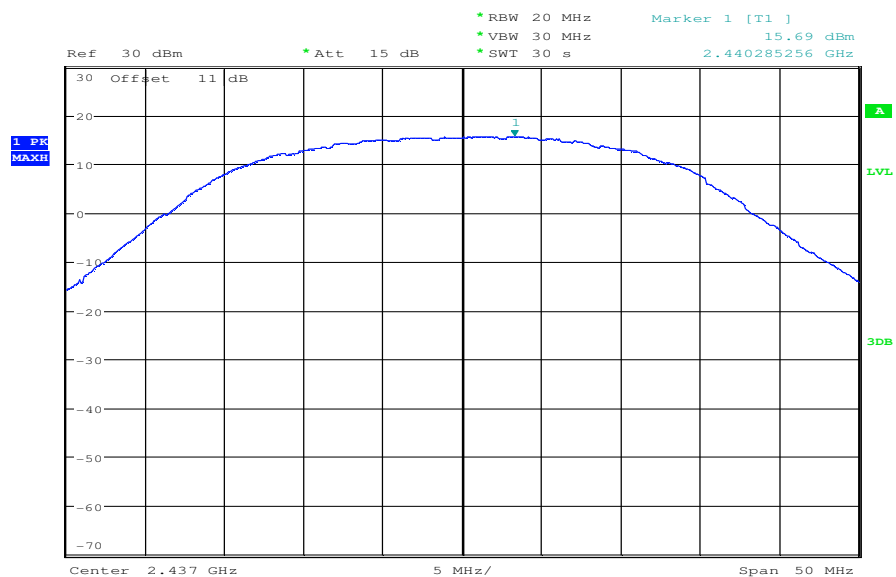

Date: 25.JAN.2012 09:23:58


Plot 4: TX mode, middle channel, 11 MBit/s

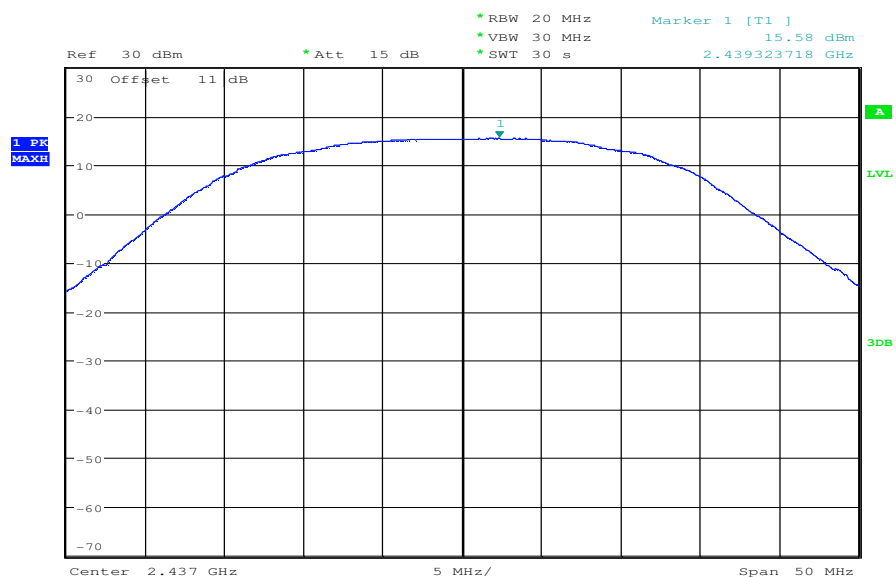

Date: 25.JAN.2012 09:25:07


Plots: OFDM / g – mode

Plot 1: TX mode, middle channel, 6 MBit/s

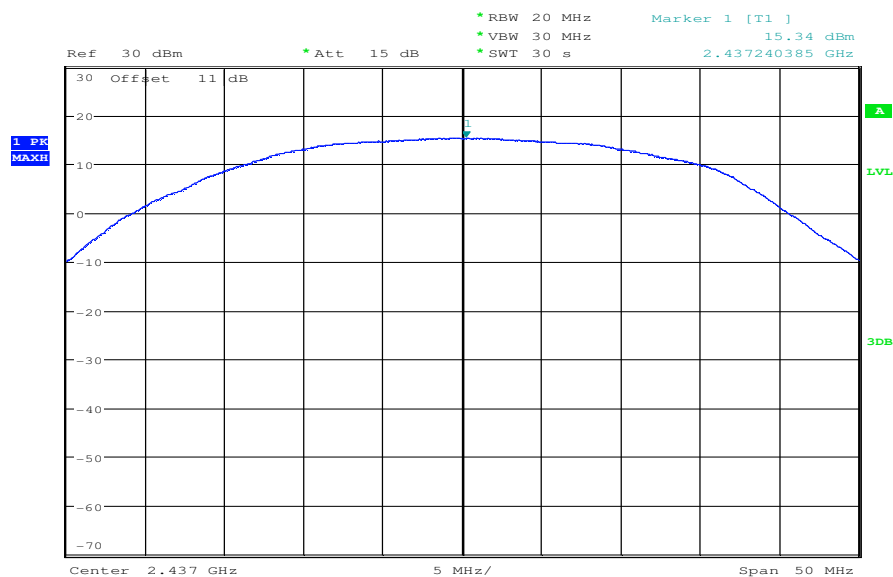


Date: 25.JAN.2012 10:55:12

Plot 2: TX mode, middle channel, 9 MBit/s

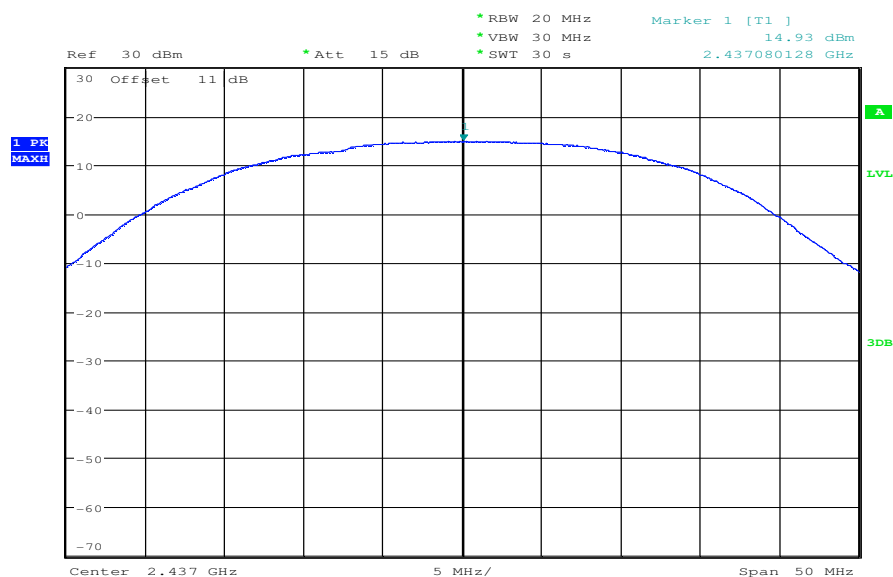


Date: 25.JAN.2012 10:56:20

Plot 3: TX mode, middle channel, 12 MBit/s

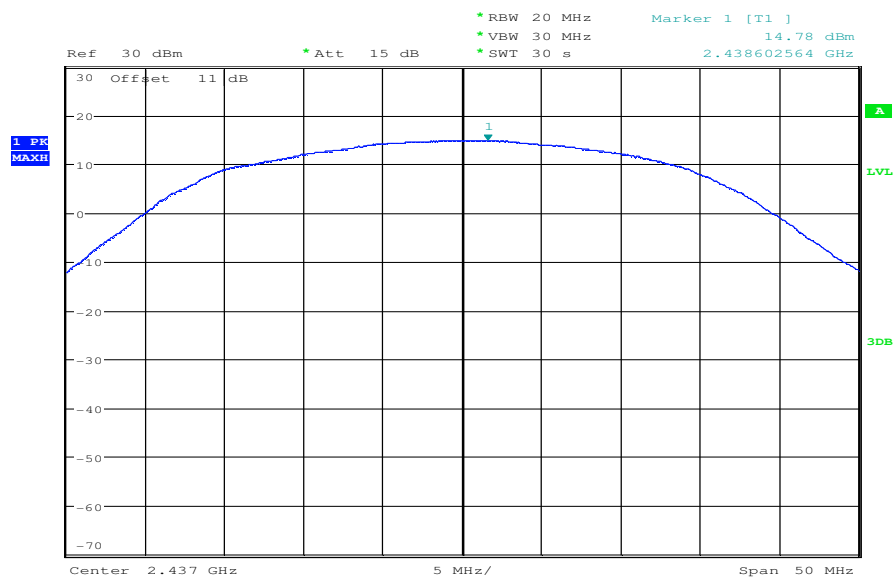


Date: 25.JAN.2012 10:58:05

Plot 4: TX mode, middle channel, 18 MBit/s

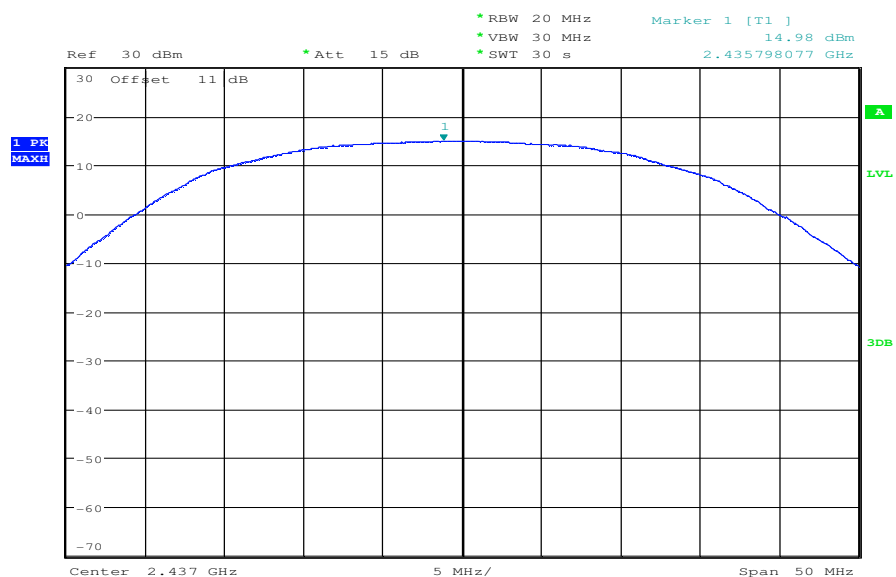


Date: 25.JAN.2012 10:58:58

Plot 5: TX mode, middle channel, 24 MBit/s

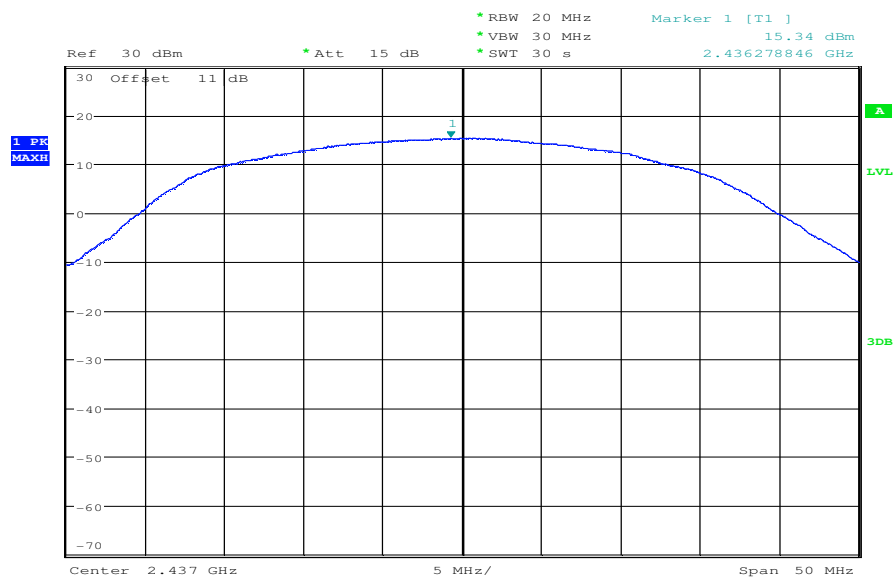


Date: 25.JAN.2012 11:00:10

Plot 6: TX mode, middle channel, 36 MBit/s

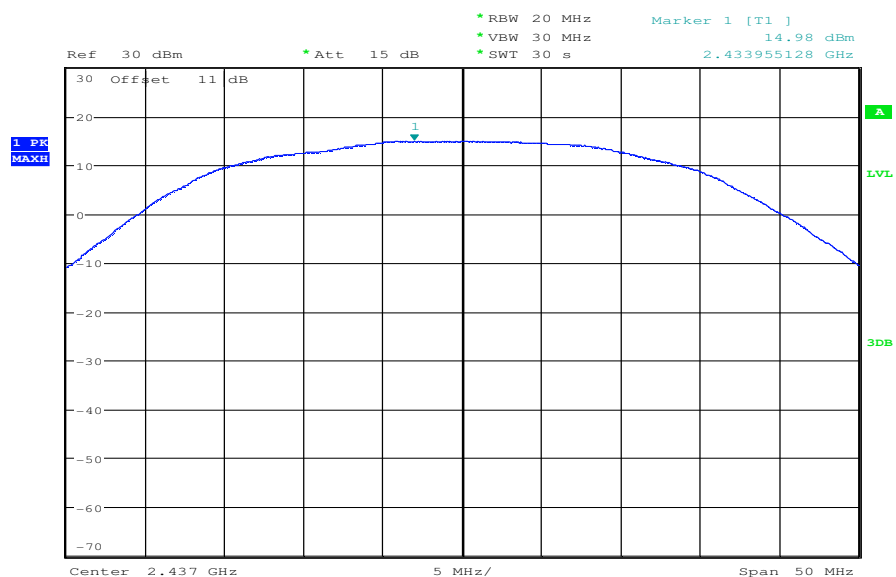


Date: 25.JAN.2012 11:01:04

Plot 7: TX mode, middle channel, 48 MBit/s

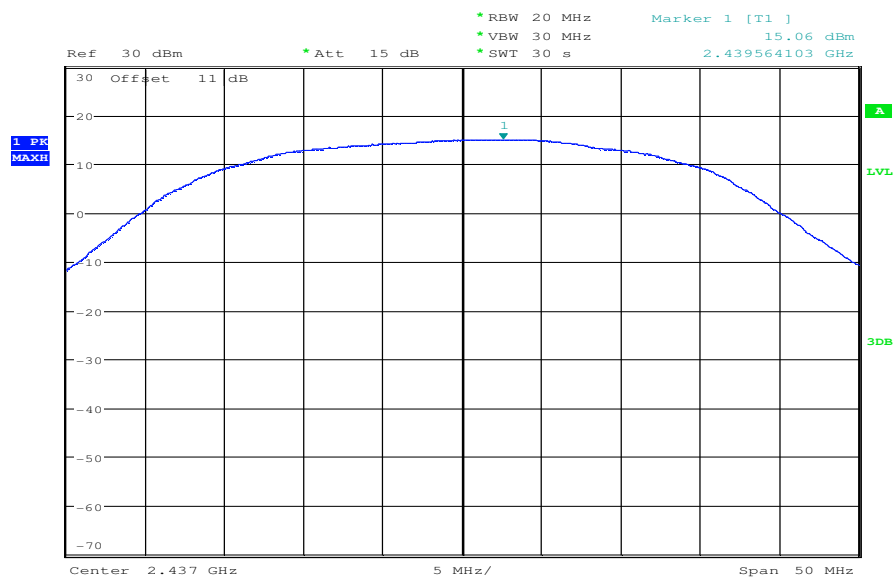

Date: 25.JAN.2012 11:02:06

Plot 8: TX mode, middle channel, 54 MBit/s

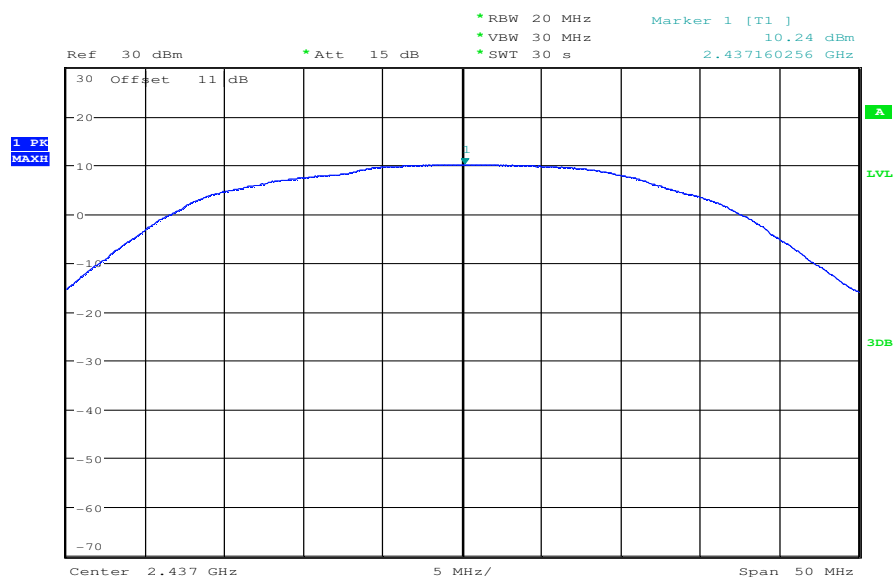


Date: 25.JAN.2012 11:03:18


9.2 Antenna gain

The following data of antenna measurements were supplied by the applicant:


Plot 1:

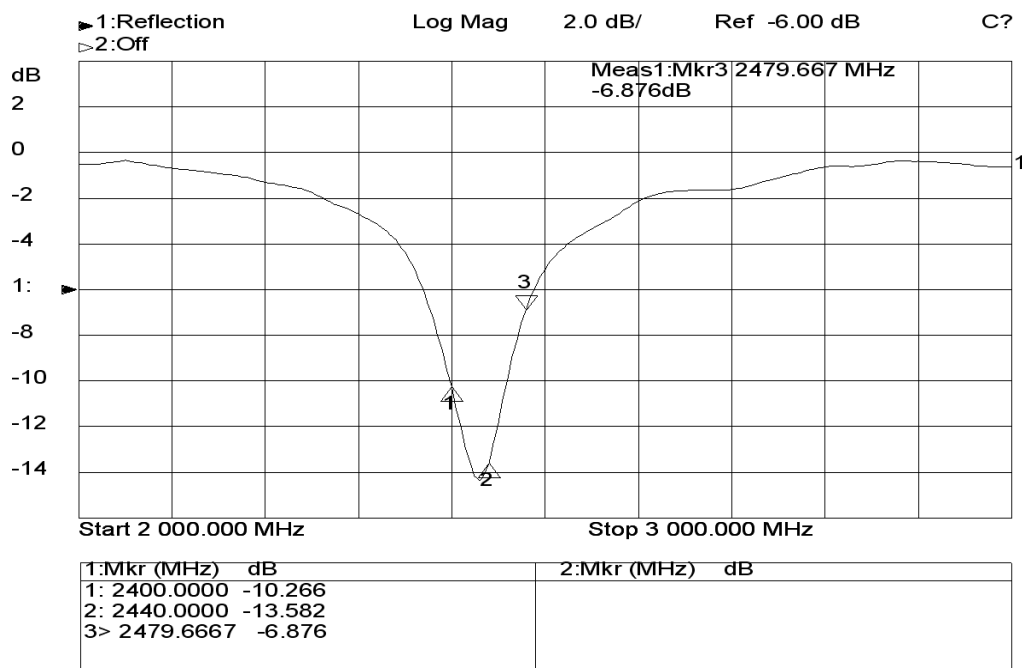


Plot 2:

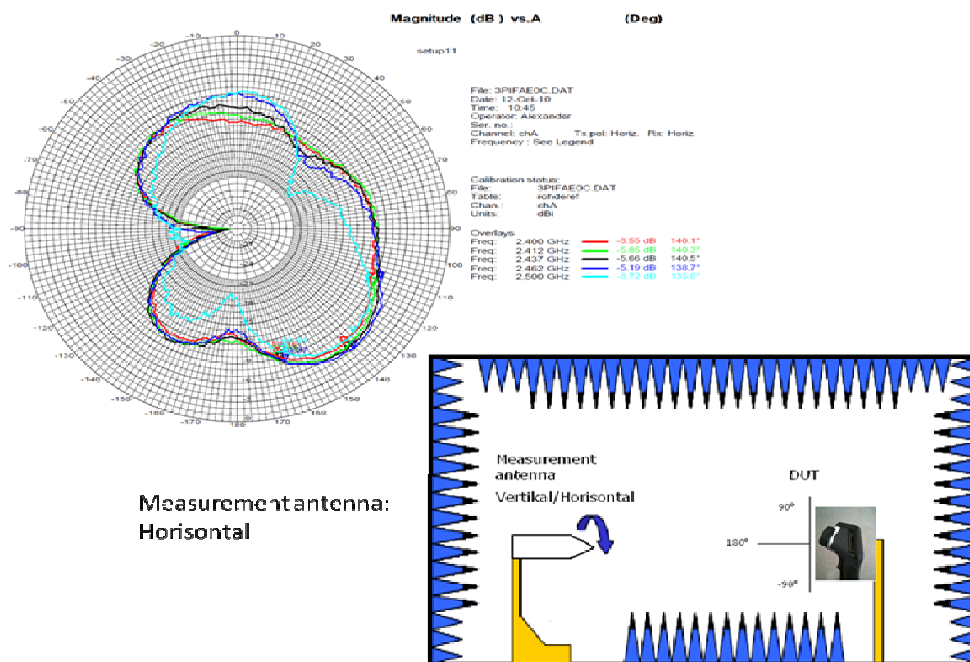


Plot 3:

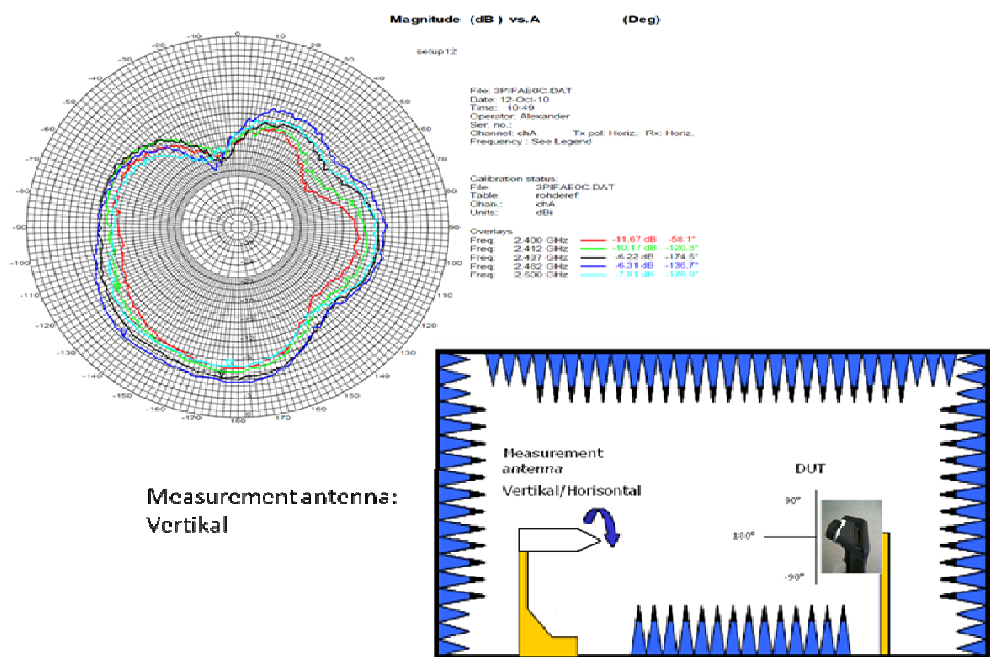

Plot 4:

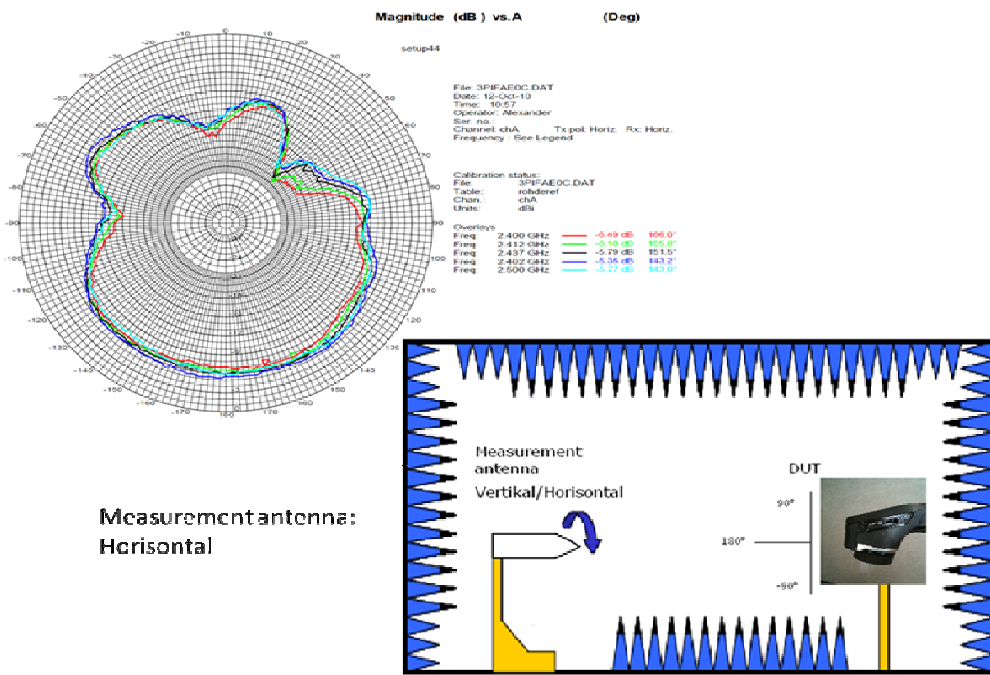

Plot 5:

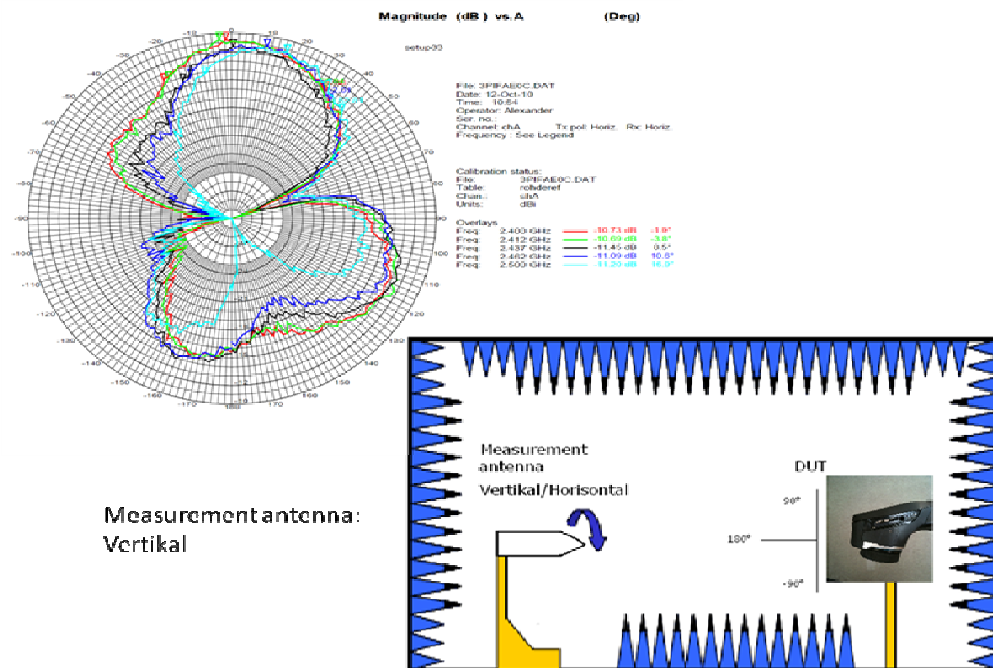

9.3 Maximum output power

Description:

Measurement of the maximum output power conducted and radiated. The measurements are performed using the data rate producing the highest conducted output power. The determination of these data rates was performed at the beginning of the tests.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	30 MHz
Resolution bandwidth:	20 MHz
Span:	50 MHz
Trace-Mode:	Max Hold

Limits:

FCC	IC
CFR Part 15.247 (b)(3)	RSS 210, Issue 8, A 8.4(4)
Maximum Output Power	
Conducted: 1.0 W – Antenna Gain max. 6 dBi	

Results: DSSS / b – mode

DSSS / b – mode Frequency	Maximum Output Power [dBm]		
	2412 MHz	2437 MHz	2462 MHz
Peak Output Power Conducted	15.82	15.58	15.42
Output Power Radiated – EIRP*)	9.88	9.69	10.58
Measurement uncertainty	± 1.5 dB (cond.) / ± 3 dB (rad.)		

*) calculated with Antenna gain

Result: The measurement is passed.

Results: OFDM / g – mode

OFDM / g – mode Frequency	Maximum Output Power [dBm]		
	2412 MHz	2437 MHz	2462 MHz
Peak Output Power Conducted	15.37	15.34	15.56
Output Power Radiated – EIRP*)	10.04	10.02	10.79
Measurement uncertainty	± 1.5 dB (cond.) / ± 3 dB (rad.)		

*)calculated with Antenna gain

Result: The measurement is passed.

9.4 Power spectral density

Description:

Measurement of the power spectral density of a digital modulated system. The measurement is repeated for both modulations at the lowest, middle and highest channel.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	500 s
Video bandwidth:	3 kHz
Resolution bandwidth:	3 kHz
Span:	1.5 MHz
Trace-Mode:	Max Hold

Limits:

FCC	IC
CFR Part 15.247 (e)	RSS 210, Issue 8, A 8.2(b)
Power Spectral Density	
The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission or over 1.0 second if the transmission exceeds 1.0-second duration.	


Results:

Modulation Frequency	Power Spectral density [dBm/3kHz]		
	2412 MHz	2437 MHz	2462 MHz
DSSS / b – mode	-10.05	-10.27	-10.31
OFDM / g – mode	-23.47	-23.71	-23.13
Measurement uncertainty	± 1.5 dB		

Result: The measurement is passed.


Plots: DSSS / b – mode

Plot 1: TX mode, lowest channel

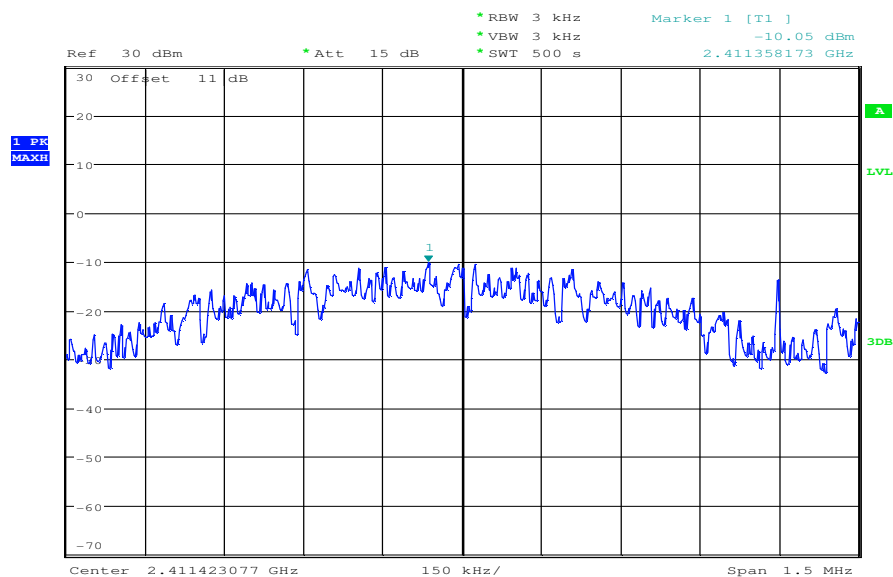


Date: 25.JAN.2012 10:41:41

Plot 2: TX mode, middle channel

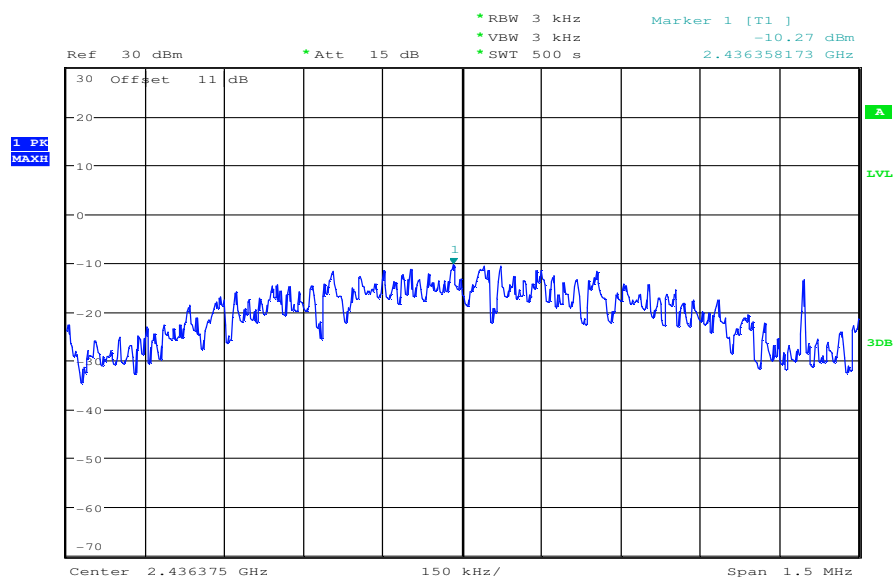

Date: 25.JAN.2012 10:22:19


Plot 3: TX mode, highest channel

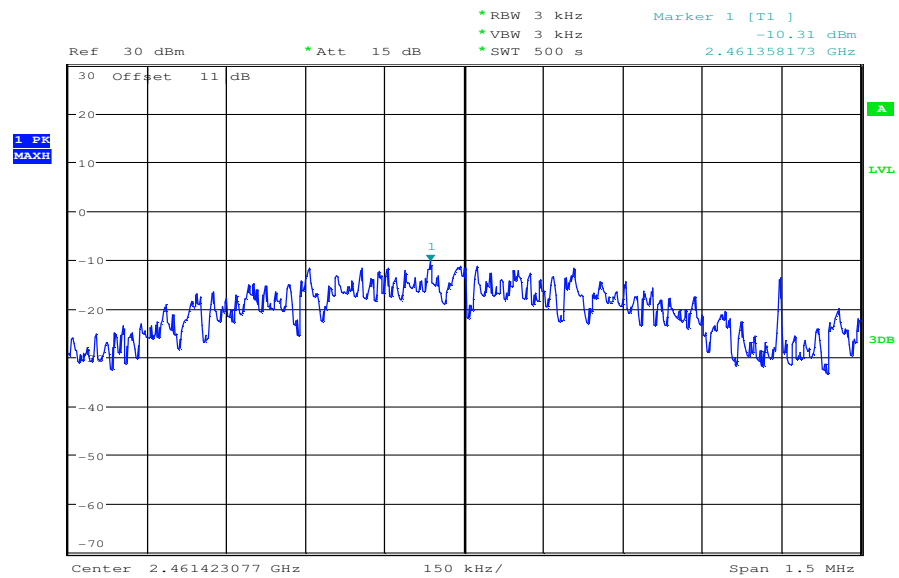

Date: 25.JAN.2012 09:52:18


Plots: OFDM / g – mode

Plot 1: TX mode, lowest channel

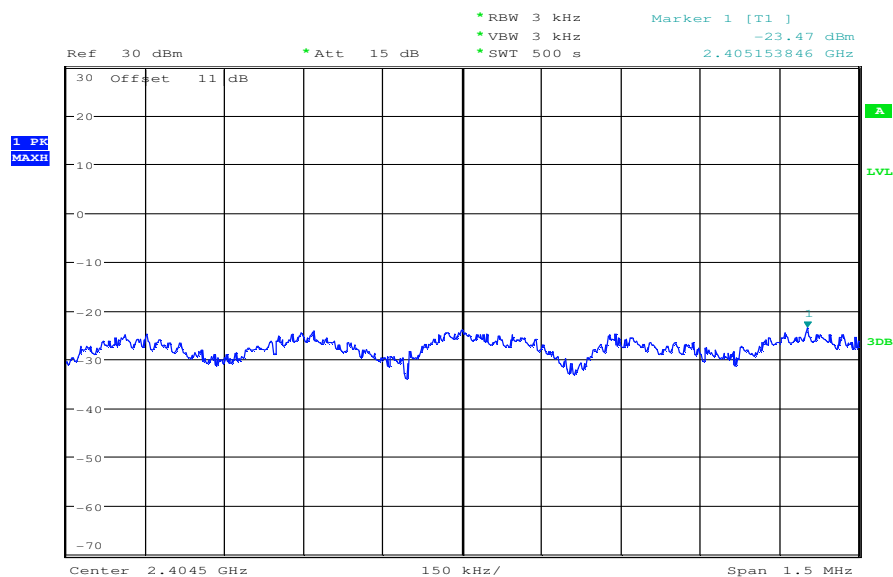


Date: 25.JAN.2012 12:19:52

Plot 2: TX mode, middle channel

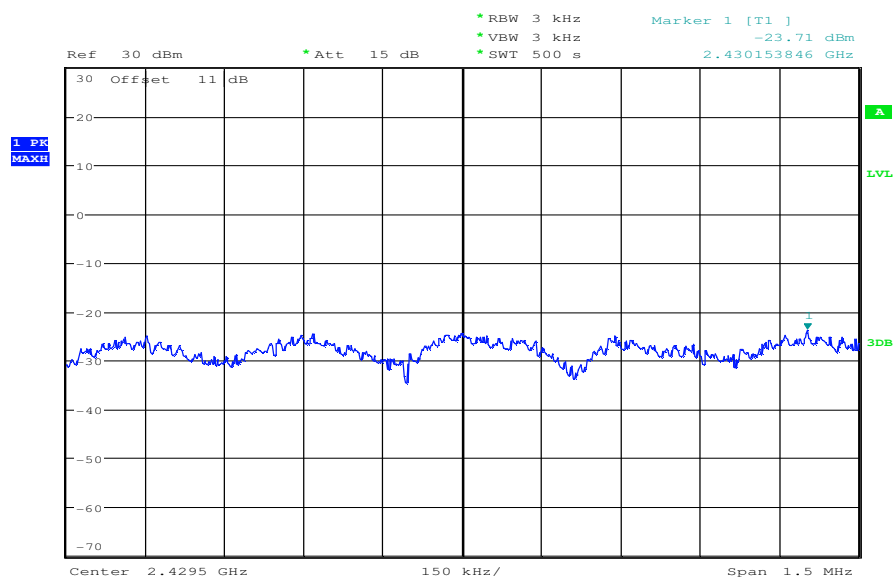

Date: 25.JAN.2012 11:46:00

Plot 3: TX mode, highest channel

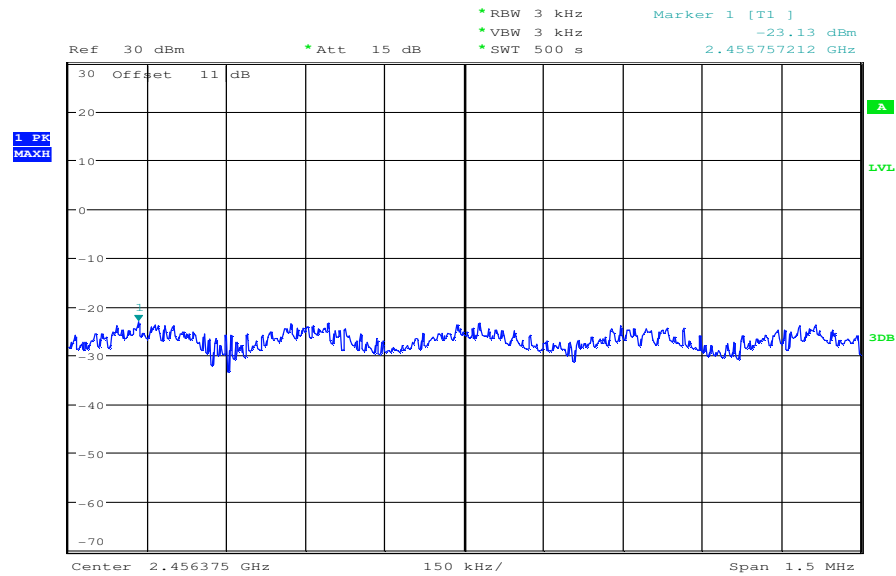

Date: 25.JAN.2012 11:16:09

9.5 Spectrum bandwidth of a FHSS system – 6 dB bandwidth

Description:

Measurement of the 6 dB bandwidth of the modulated signal.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	10 s
Video bandwidth:	100 kHz
Resolution bandwidth:	100 kHz
Span:	See plots
Trace-Mode:	Max Hold


Limits:

FCC	IC
CFR Part 15.247 (a)(2)	RSS 210, Issue 8, A 8.2(a)
Spectrum Bandwidth of a FHSS System – 6 dB Bandwidth	
Systems using digital modulation techniques may operate in the 2400–2483.5 MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.	


Results:

Modulation Frequency	6 dB BANDWIDTH [MHz]		
	2412 MHz	2437 MHz	2462 MHz
DSSS / b – mode	9.28	9.15	9.13
OFDM / g – mode	16.65	16.67	16.63
Measurement uncertainty	± 100 kHz		

Result: The measurement is passed.

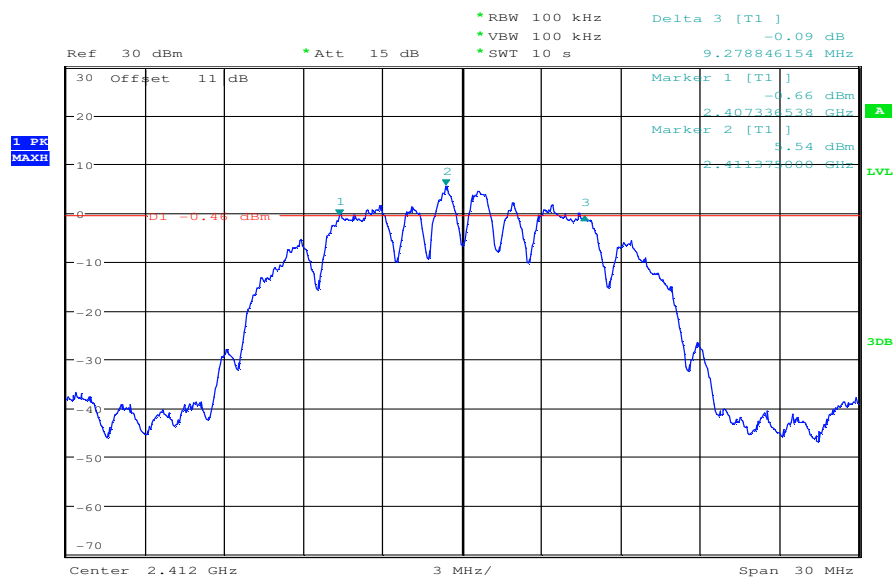
Plots: DSSS / b – mode**Plot 1: TX mode, lowest channel, 6 dB bandwidth**

Date: 25.JAN.2012 10:27:53

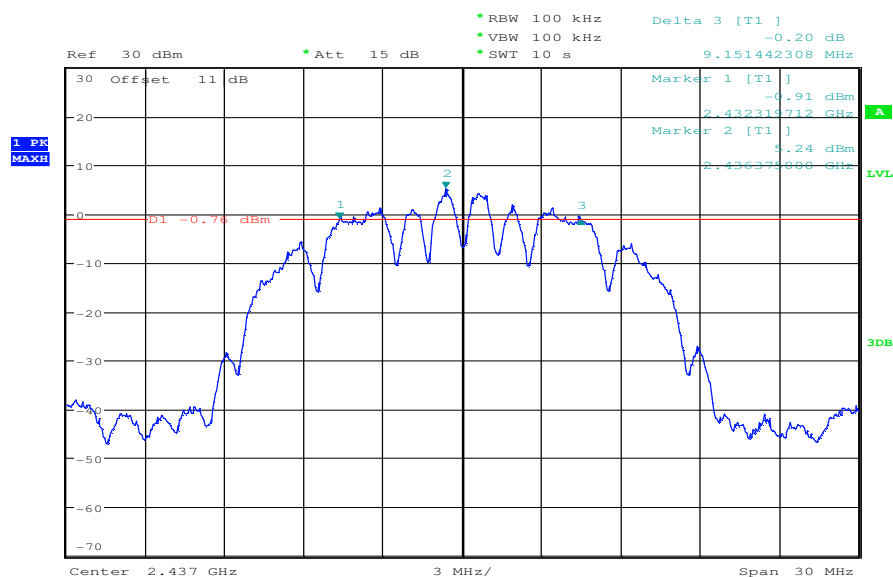Plot 2: TX mode, middle channel, 6 dB bandwidth

Date: 25.JAN.2012 10:24:25


Plot 3: TX mode, highest channel, 6 dB bandwidth

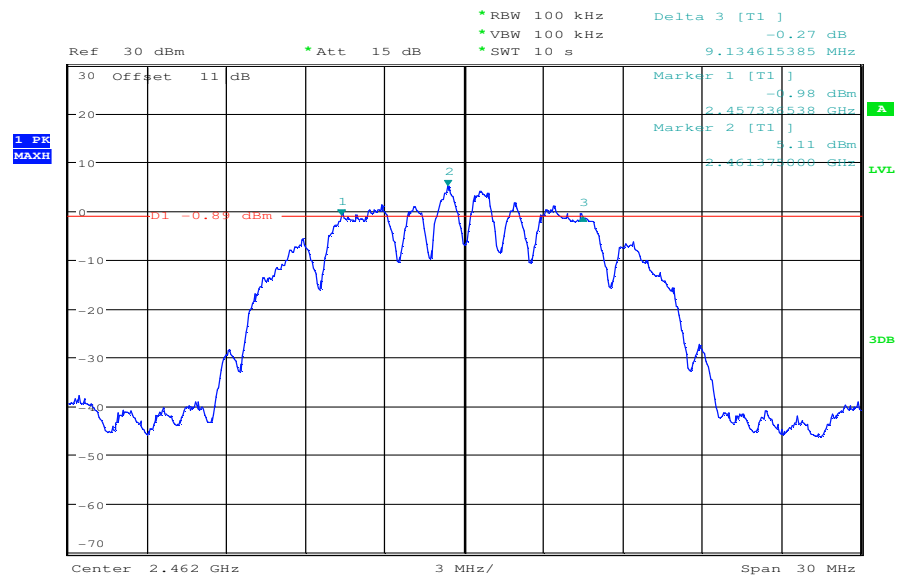

Date: 25.JAN.2012 09:34:22


Plots: OFDM / g – mode

Plot 1: TX mode, lowest channel, 6 dB bandwidth

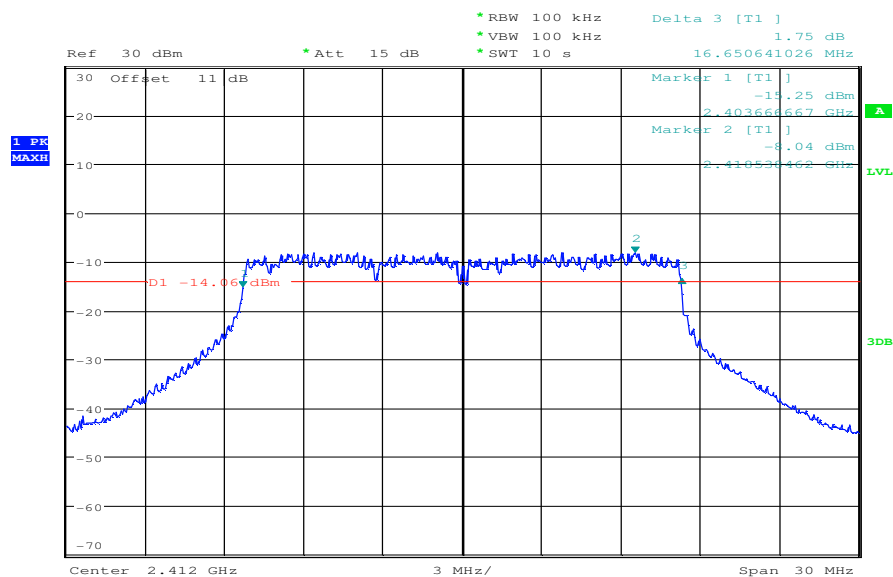


Date: 25.JAN.2012 11:52:37

Plot 2: TX mode, middle channel, 6 dB bandwidth

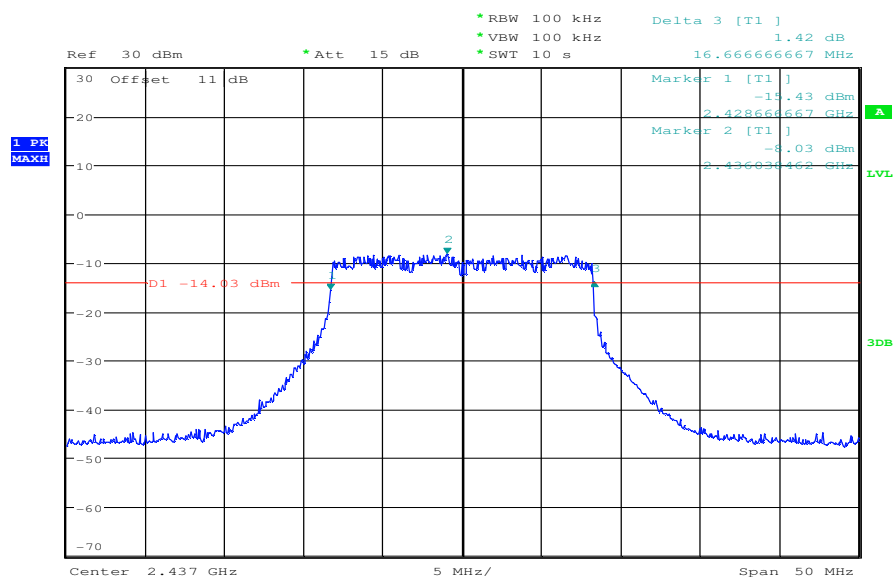

Date: 25.JAN.2012 11:30:15

Plot 3: TX mode, highest channel, 6 dB bandwidth

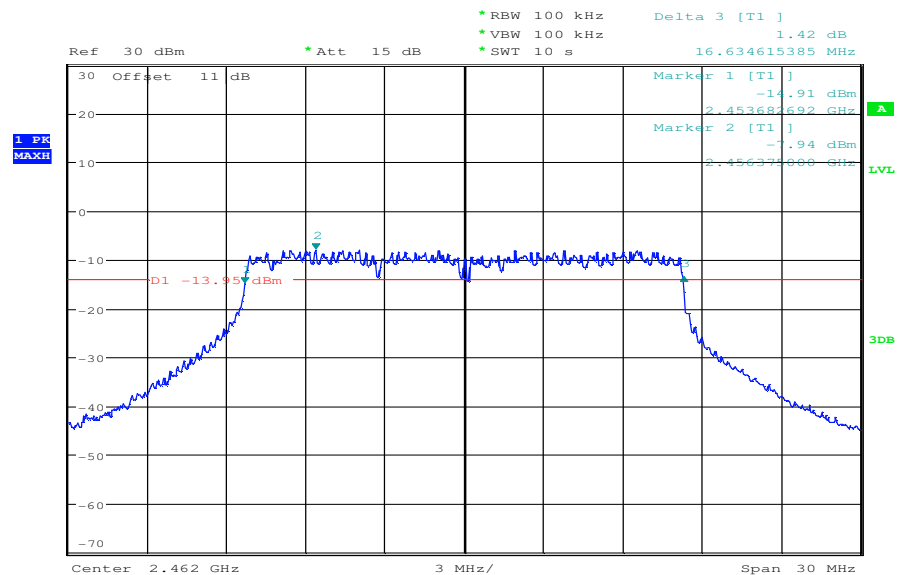

Date: 25.JAN.2012 11:24:46

9.6 Spectrum bandwidth of a FHSS system – 20 dB bandwidth

Description:

Measurement of the 20 dB bandwidth of the modulated signal.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	10 s
Video bandwidth:	100 kHz
Resolution bandwidth:	100 kHz
Span:	See plots
Trace-Mode:	Max Hold

Limits:

FCC	IC
CFR Part 15.247 (a)(2)	RSS 210, Issue 8, A 8.2(a)
Spectrum Bandwidth of a FHSS System – 20 dB Bandwidth	
Systems using digital modulation techniques may operate in the 2400–2483.5 MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.	


Results:

Modulation Frequency	20 dB BANDWIDTH [MHz]		
	2412 MHz	2437 MHz	2462 MHz
DSSS / b – mode	15.48	15.50	15.58
OFDM / g – mode	19.25	19.15	19.28
Measurement uncertainty	± 100 kHz		

Result: The measurement is passed.


Plots: DSSS / b – mode

Plot 1: TX mode, lowest channel, 20 dB bandwidth

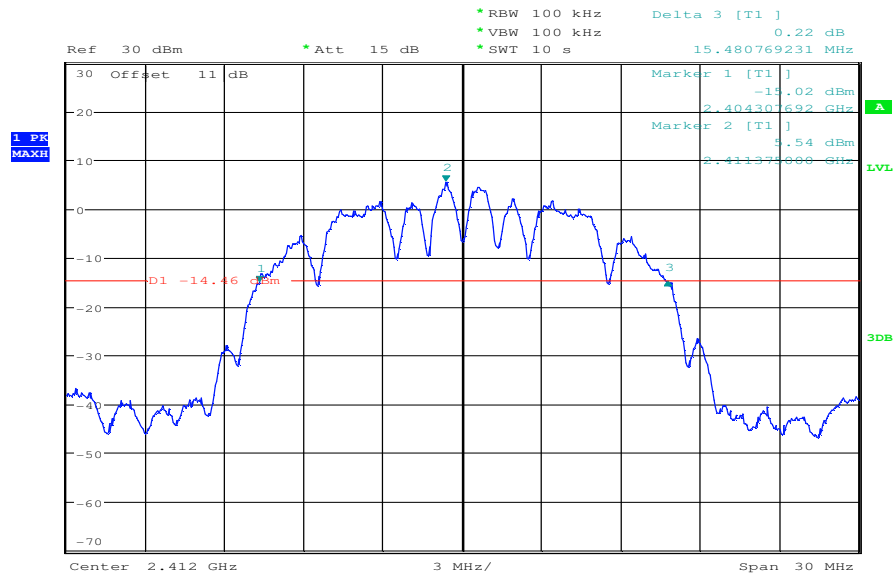


Date: 25.JAN.2012 10:27:05

Plot 2: TX mode, middle channel, 20 dB bandwidth

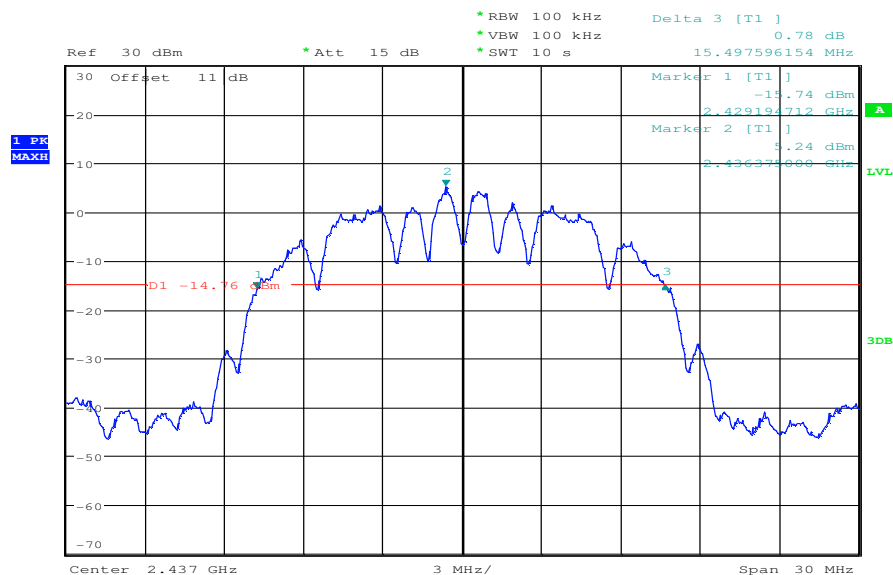

Date: 25.JAN.2012 10:25:21


Plot 3: TX mode, highest channel, 20 dB bandwidth

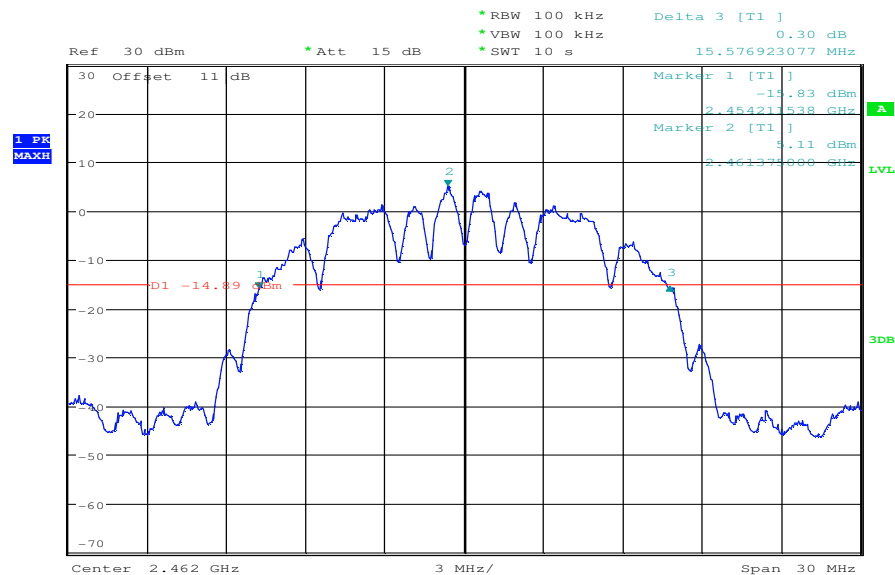

Date: 25.JAN.2012 09:33:27


Plots: OFDM / g – mode

Plot 1: TX mode, lowest channel, 20 dB bandwidth

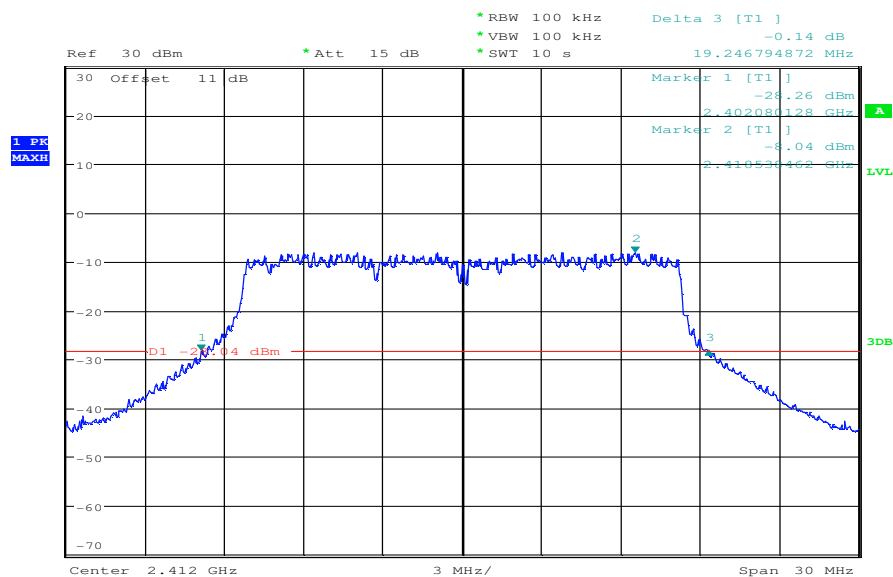


Date: 25.JAN.2012 11:53:16

Plot 2: TX mode, middle channel, 20 dB bandwidth

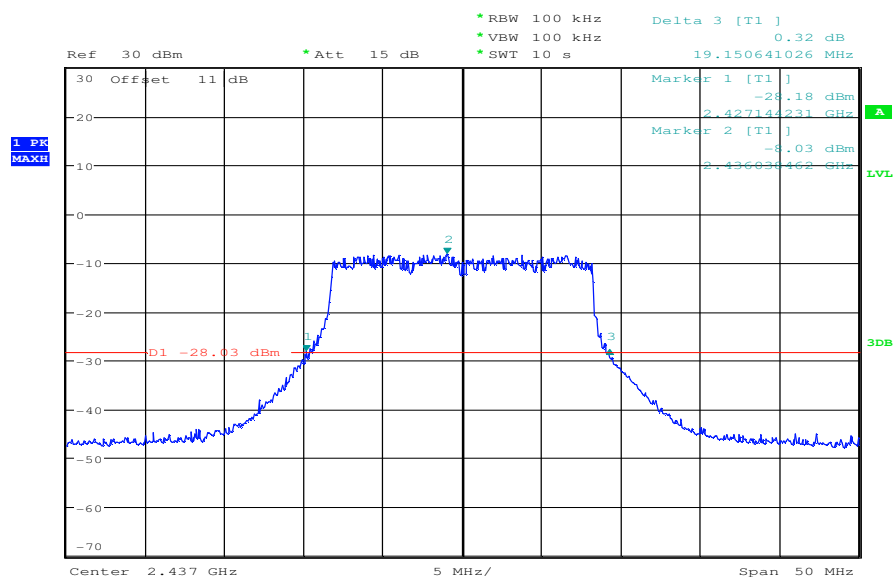

Date: 25.JAN.2012 11:29:27

Plot 3: TX mode, highest channel, 20 dB bandwidth

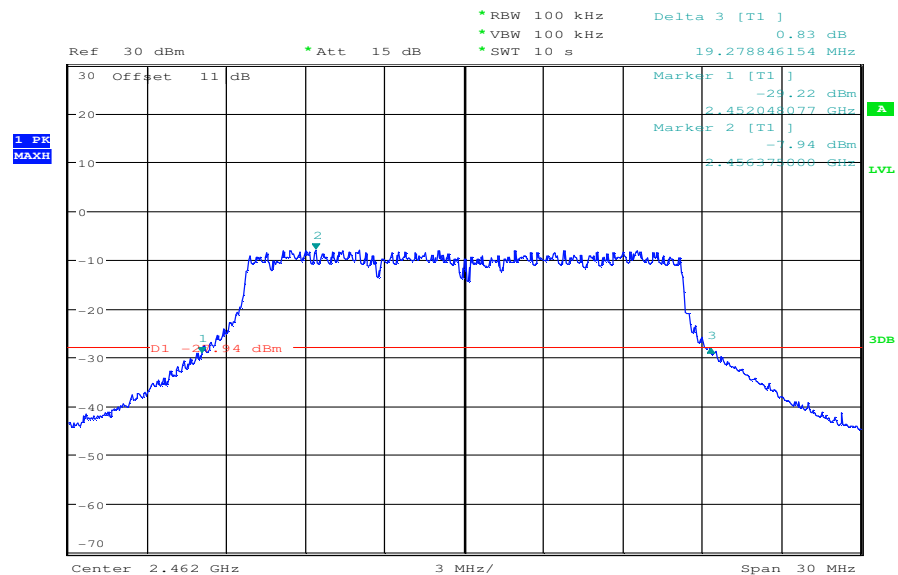

Date: 25.JAN.2012 11:25:36

9.7 Band edge compliance conducted

Description:

Measurement of the conducted band edge compliance. EUT is measured at the lower and upper band edge in both modes.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	10 s
Video bandwidth:	500 kHz
Resolution bandwidth:	100 kHz
Span:	Lower Band Edge: 2300 – 2425 MHz Upper Band Edge: 2450 – 2500 MHz
Trace-Mode:	Max Hold

Limits:

FCC	IC
CFR Part 15.247 (d)	RSS 210, Issue 8, A 8.5
Band Edge Compliance Conducted	
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.	


Results:

Scenario Modulation	Band Edge Compliance Conducted [dB]	
	DSSS / b – mode	OFDM / g – mode
Lower Band Edge – Channel 1	> 20 dB (see plot 1)	> 20 dB (see plot 3)
Upper Band Edge – Channel 11	> 20 dB (see plot 2)	> 20 dB (see plot 4)
Measurement uncertainty	± 1.5 dB	

Result: The measurement is passed.


Plots: DSSS / b – mode

Plot 1: TX mode, lower band edge

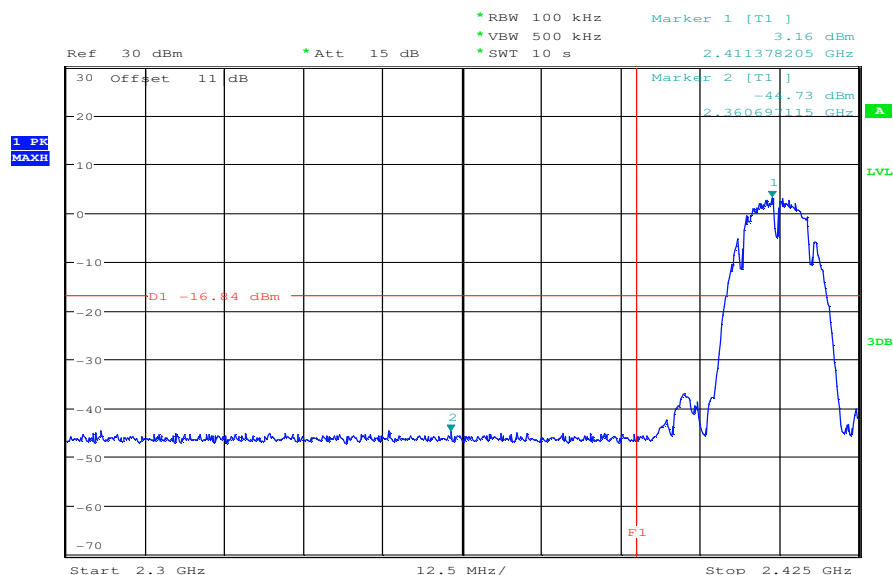

Date: 25.JAN.2012 12:24:41


Plot 2: TX mode, upper band edge

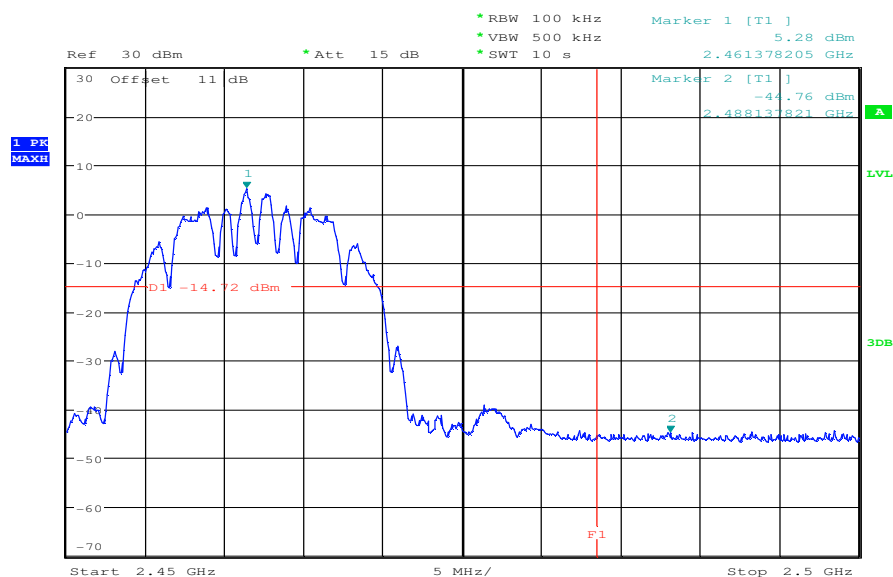

Date: 25.JAN.2012 09:39:42


Plots: OFDM / g – mode

Plot 1: TX mode, lower band edge

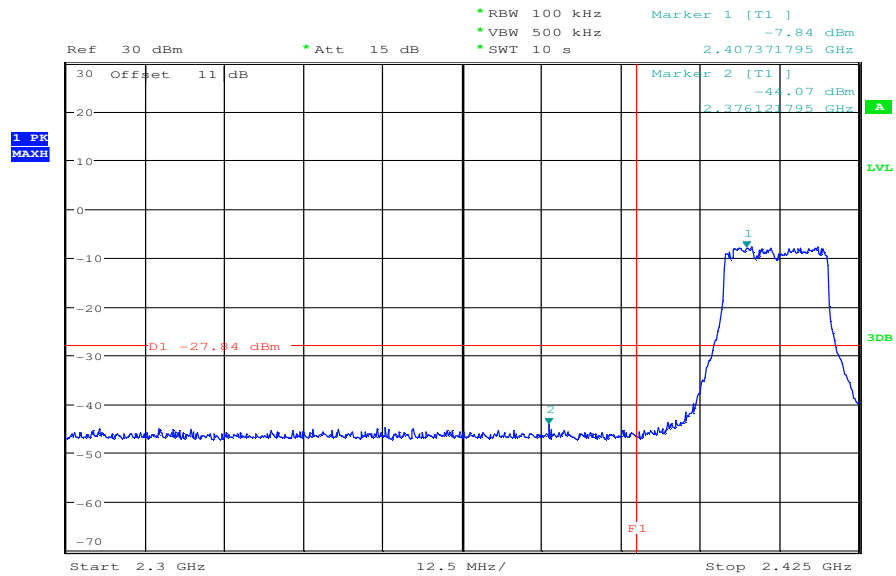

Date: 25.JAN.2012 11:48:52

Plot 2: TX mode, upper band edge

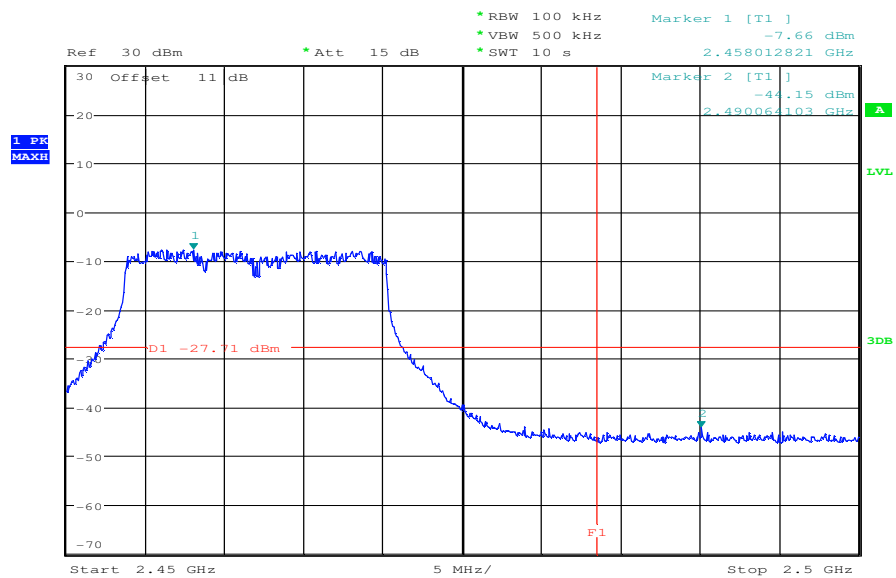

Date: 25.JAN.2012 12:21:58

9.8 Band edge compliance radiated

Description:

Measurement of the radiated band edge compliance. The EUT is turned in the position that results in the maximum level at the band edge. Then a sweep over the corresponding restricted band is performed. The EUT is set to channel 1 for the lower restricted band and to channel 11 for the upper restricted band. The measurement is repeated for all modulations. Measurement distance is 3m.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	10 Hz
Resolution bandwidth:	1 MHz
Span:	Lower Band: 2300 – 2400 MHz Higher Band: 2480 – 2500 MHz
Trace-Mode:	Max Hold

Limits:

FCC	IC
CFR Part 15.205	RSS 210, Issue 8, A 8.5
Band Edge Compliance Radiated	
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).	
54 dBμV/m AVG	


Results:

Szenario Modulation	Band Edge Compliance Radiated (also see plots)	
	DSSS / b – mode	OFDM / g – mode
Lower Band Edge – Channel 1	< 54 dBμV/m	< 54 dBμV/m
Upper Band Edge – Channel 11	< 54 dBμV/m	< 54 dBμV/m
Measurement uncertainty	± 3 dB	


Result: The result of the measurement is passed.

Plots: DSSS / b – mode


Plot 1: TX mode, lower band edge, vertical polarization

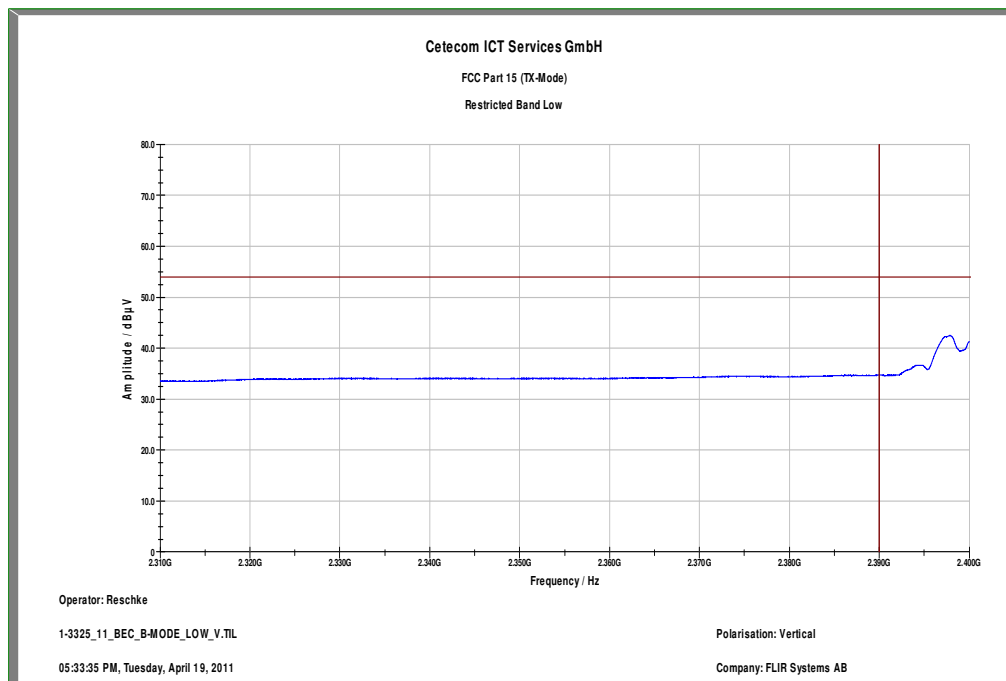


Plot 2: TX mode, upper band edge, vertical polarization

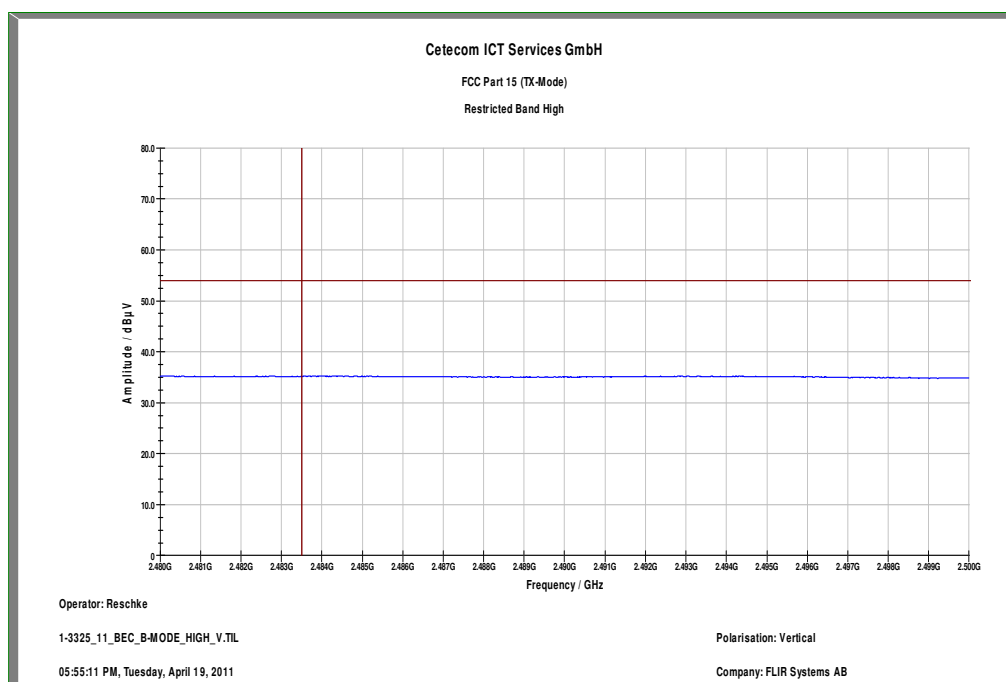

Plot 3: TX mode, lower band edge, horizontal polarization

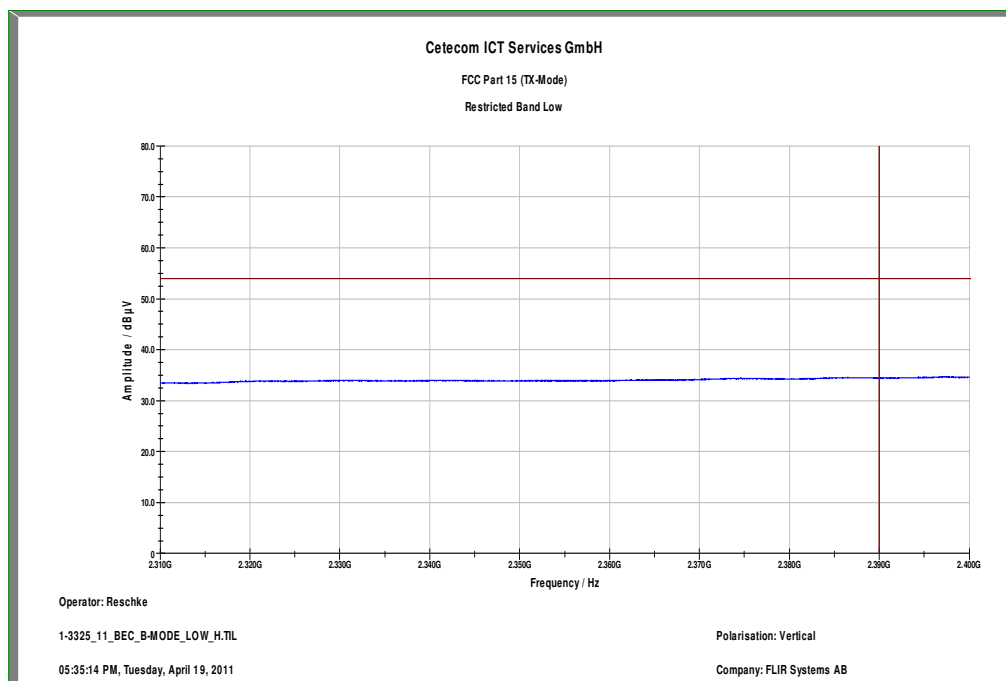


Plot 4: TX mode, upper band edge, horizontal polarization

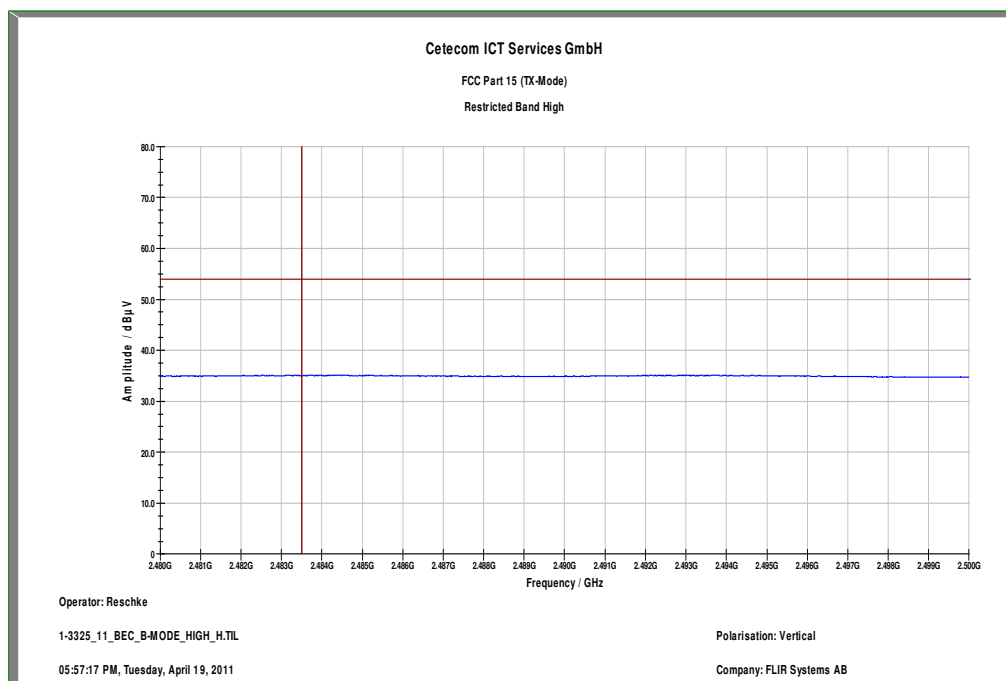


Plots: OFDM / g – mode


Plot 5: TX mode, lower band edge, vertical polarization

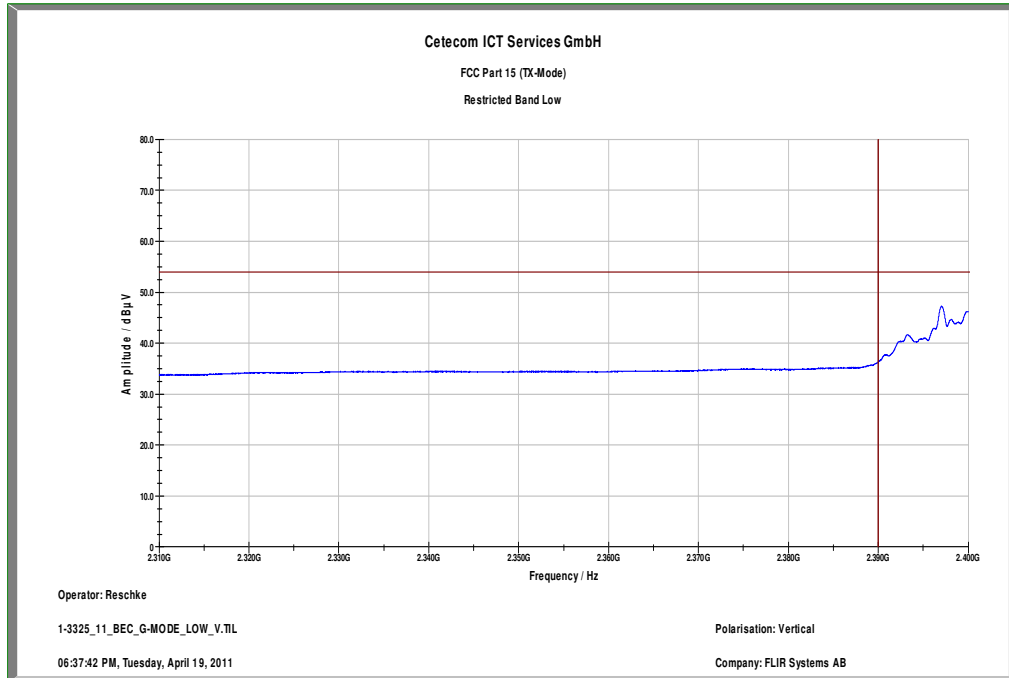


Plot 6: TX mode, upper band edge, vertical polarization

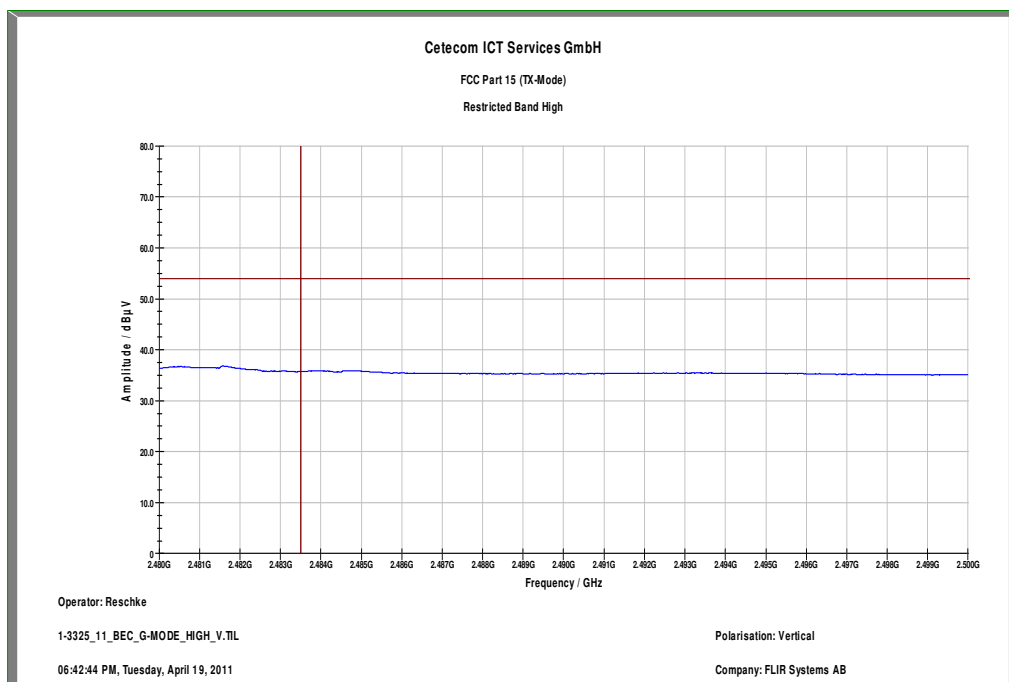

Plot 7: TX mode, lower band edge, horizontal polarization

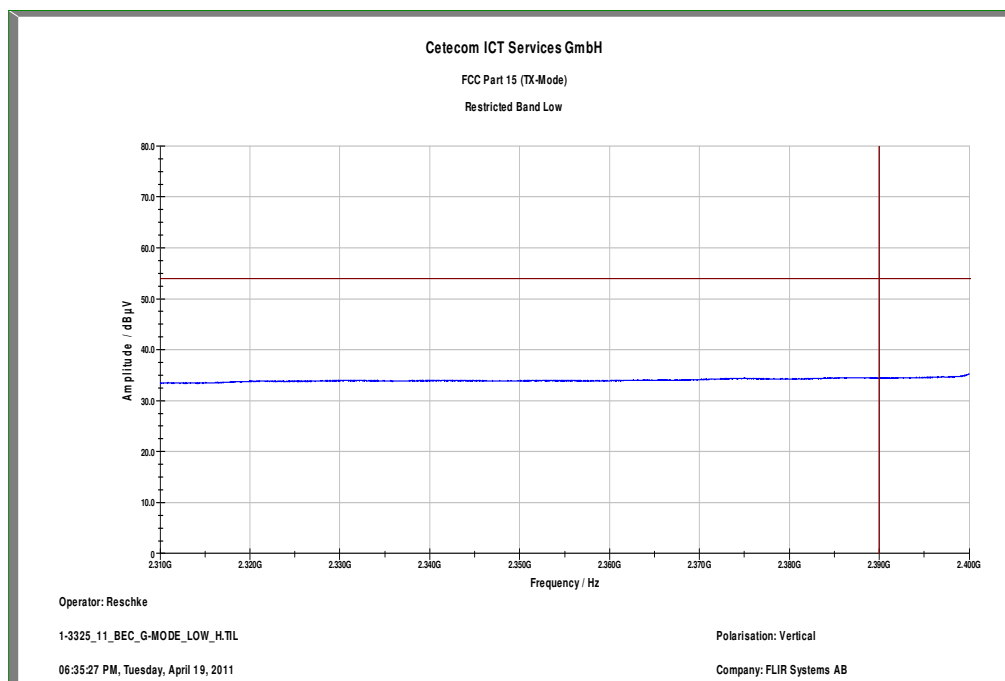

Plot 8: TX mode, upper band edge, horizontal polarization

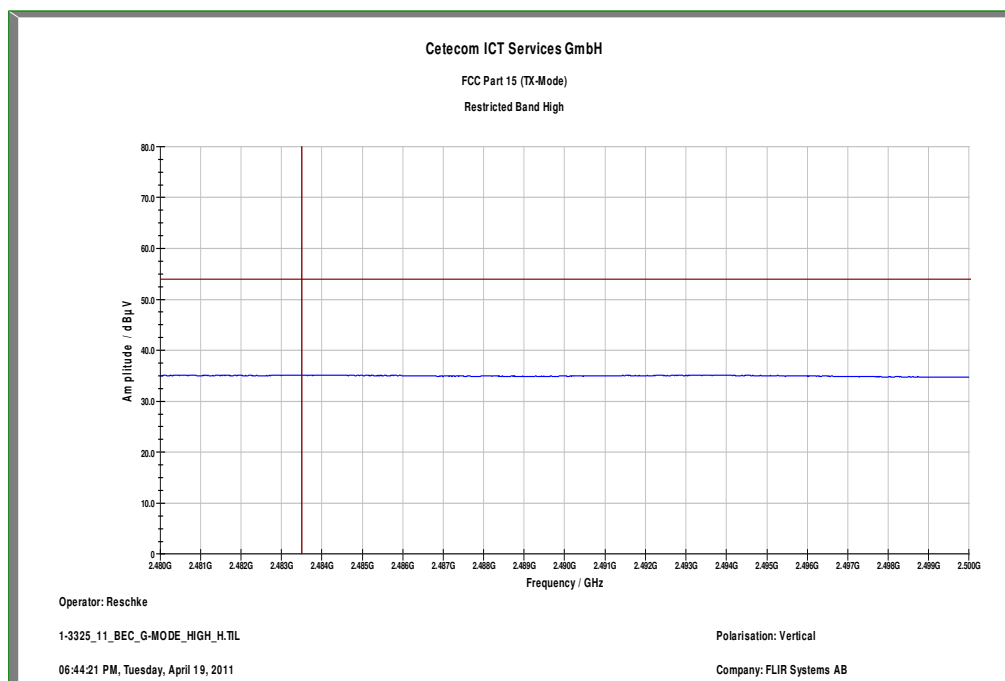

9.9 TX spurious emissions conducted

Description:

Measurement of the conducted spurious emissions in transmit mode. The measurement is performed at channel 1, 6 and 11. The measurement is repeated for all modulations.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	$\geq 10\text{s}/1\text{GHz}$
Video bandwidth:	100 kHz
Resolution bandwidth:	100 kHz
Span:	9 kHz to 25 GHz
Trace-Mode:	Max Hold

Limits:

FCC	IC
CFR Part 15.247(d)	RSS 210, Issue 8, A 8.5
TX Spurious Emissions Conducted	
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required	

Results: DSSS / b – mode

TX Spurious Emissions Conducted					
DSSS - mode					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
2412		5.50	30 dBm		Operating frequency
No critical peaks detected			-20 dBc		complies
2437		5.56	30 dBm		Operating frequency
No critical peaks detected			-20 dBc		complies
2462		5.53	30 dBm		Operating frequency
No critical peaks detected			-20 dBc		complies
Measurement uncertainty		± 3 dB			


Result: The measurement is passed.**Results: OFDM / g – mode**

TX Spurious Emissions Conducted					
OFDM - mode					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
2412		-7.91	30 dBm		Operating frequency
No critical peaks detected			-20 dBc		complies
2437		-8.16	30 dBm		Operating frequency
No critical peaks detected			-20 dBc		complies
2462		-7.73	30 dBm		Operating frequency
No critical peaks detected			-20 dBc		complies
Measurement uncertainty		± 3 dB			

Result: The measurement is passed.

Plots: DSSS / b – mode


Plot 1: TX mode, lowest channel, up to 1 GHz

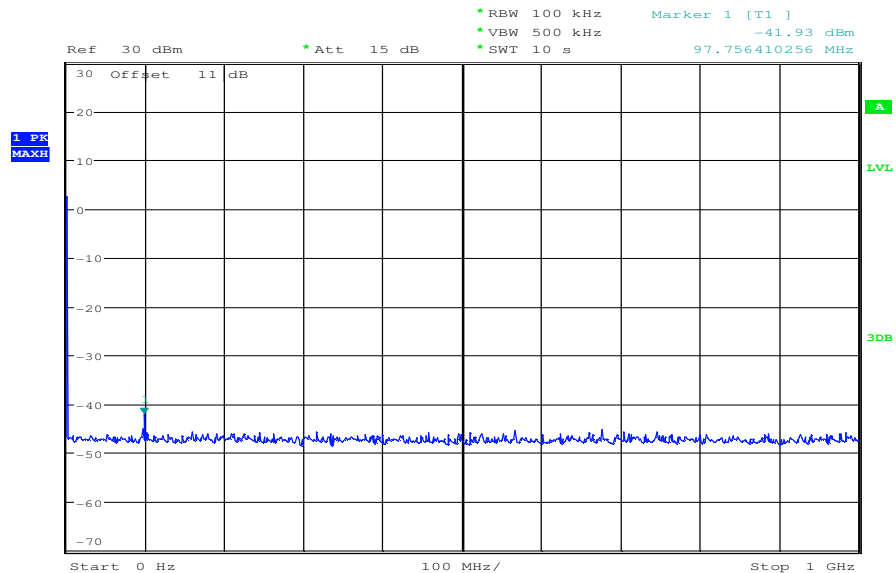


Date: 25.JAN.2012 10:42:40

The peak at the beginning of the plot is the LO from the SA.


Plot 2: TX mode, lowest channel, 1 GHz to 12 GHz

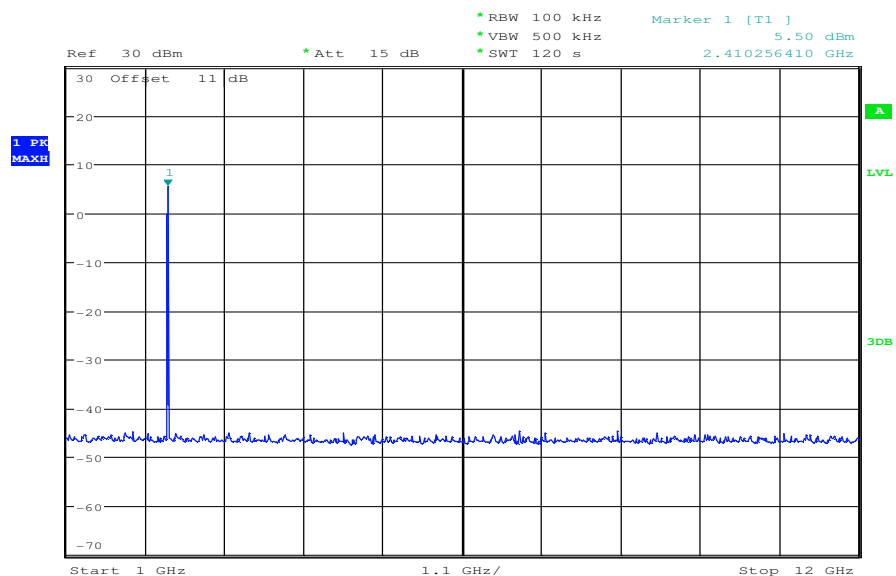

Date: 25.JAN.2012 10:45:09

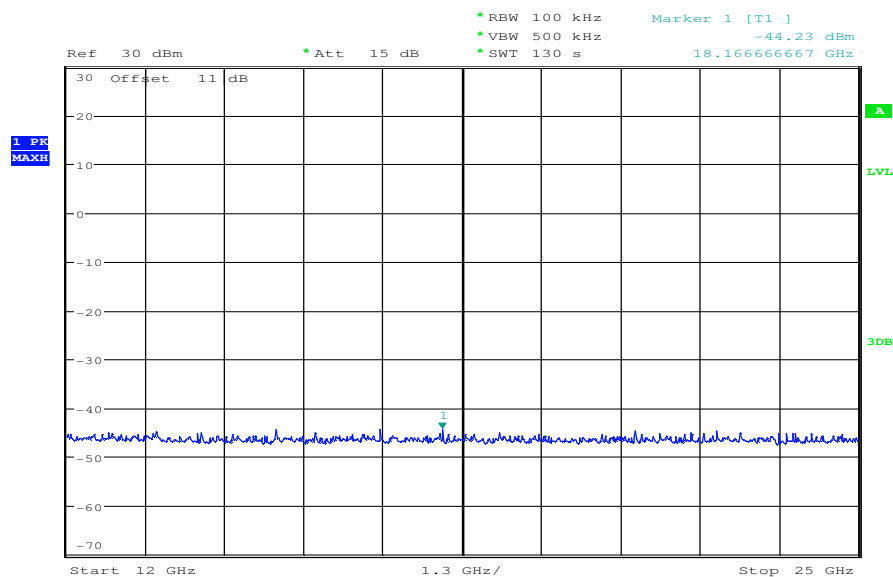Plot 3: TX mode, lowest channel, 12 GHz to 25 GHz


Date: 25.JAN.2012 10:47:47

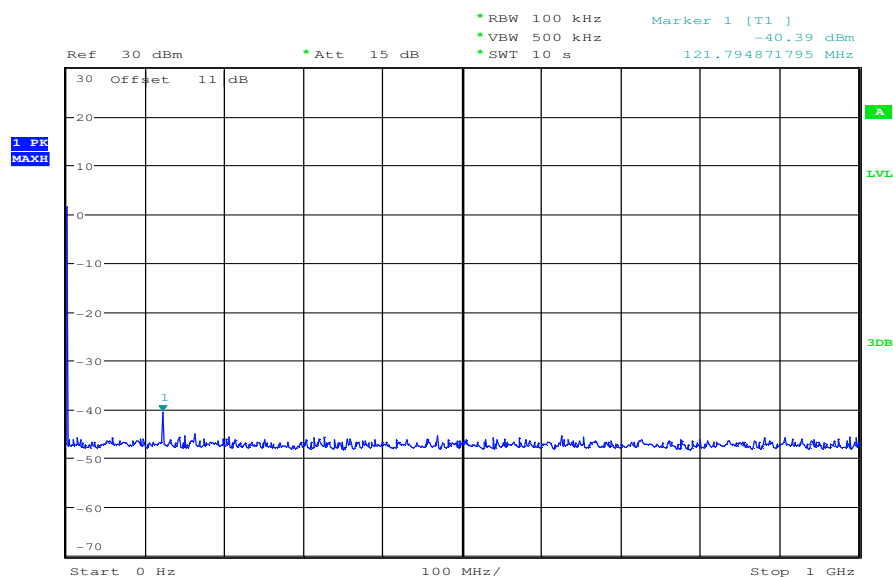Plot 4: TX mode, middle channel, up to 1 GHz

Date: 25.JAN.2012 10:06:15


The peak at the beginning of the plot is the LO from the SA.

Plot 5: TX mode, middle channel, 1 GHz to 12 GHz

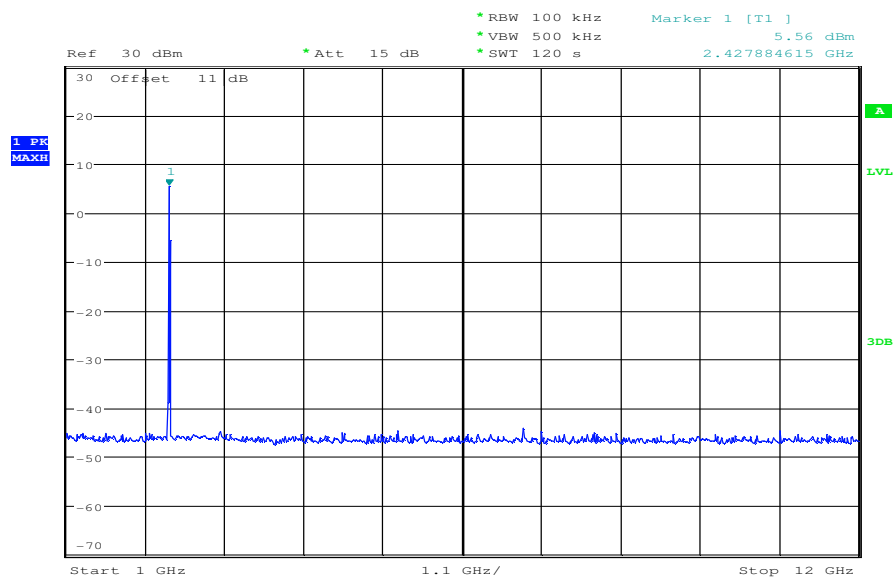


Date: 25.JAN.2012 10:05:34


Plot 6: TX mode, middle channel, 12 GHz to 25 GHz

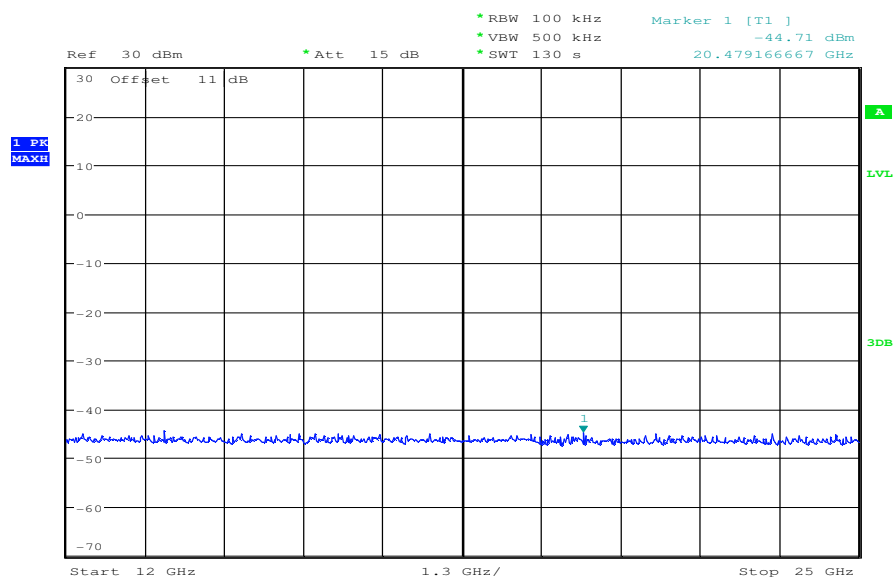

Date: 25.JAN.2012 10:02:42

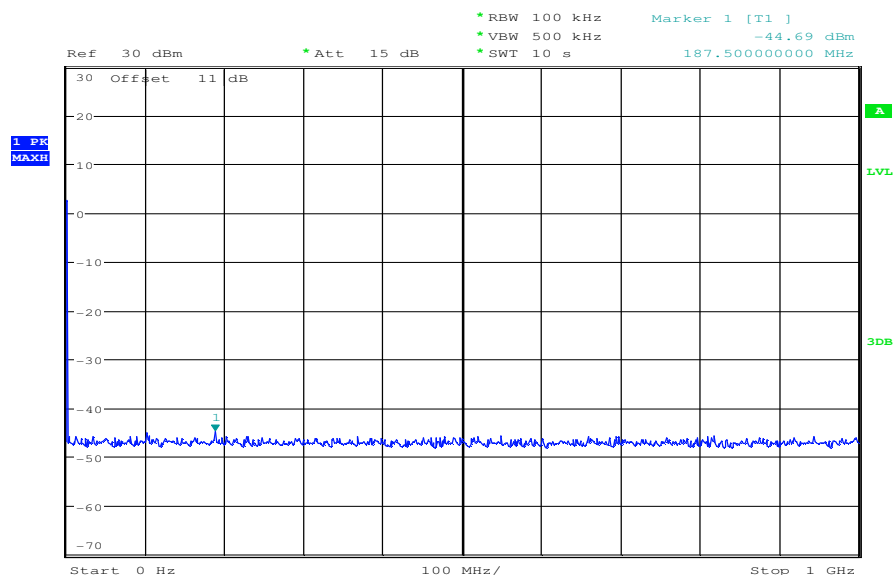
Plot 7: TX mode, highest channel, up to 1 GHz

Date: 25.JAN.2012 09:53:35

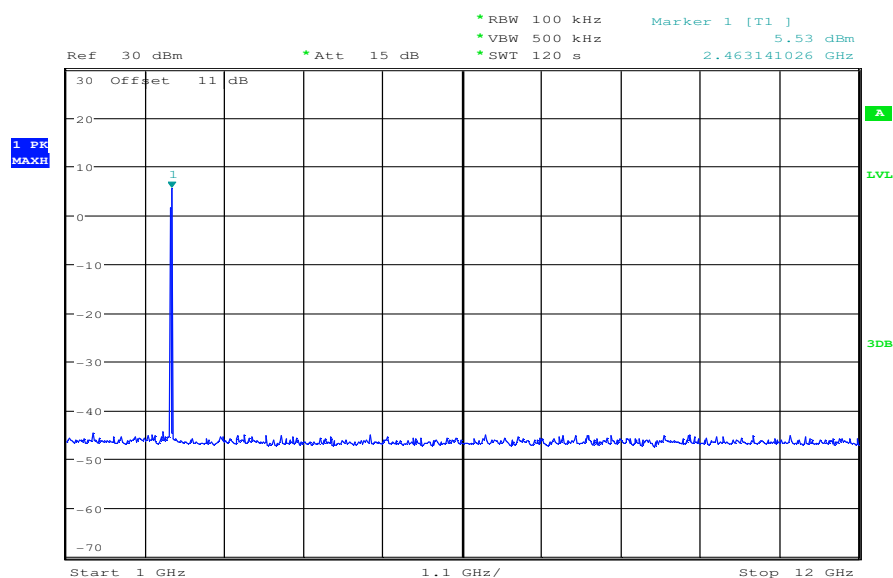
*The peak at the beginning of the plot is the LO from the SA.***Plot 8: TX mode, highest channel, 1 GHz to 12 GHz**

Date: 25.JAN.2012 09:56:05


Plot 9: TX mode, highest channel, 12 GHz to 25 GHz

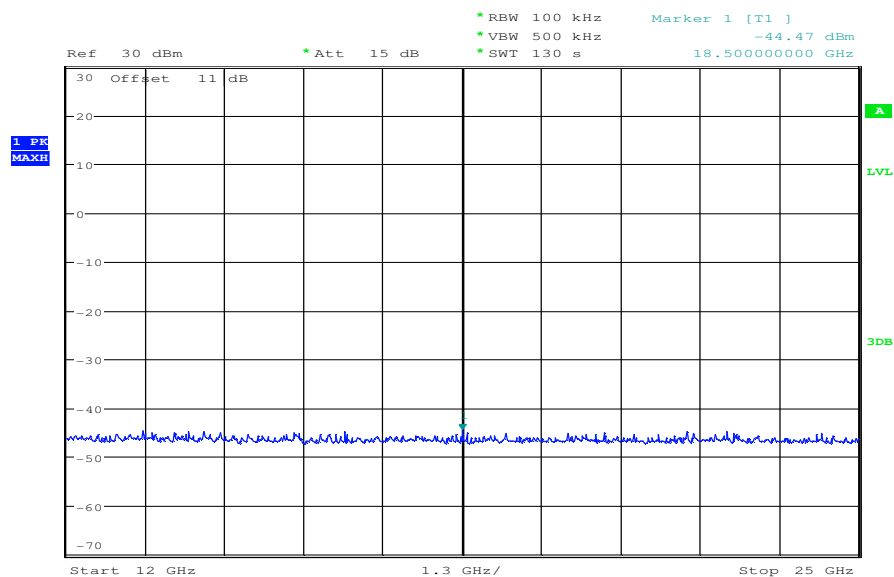

Date: 25.JAN.2012 09:58:56

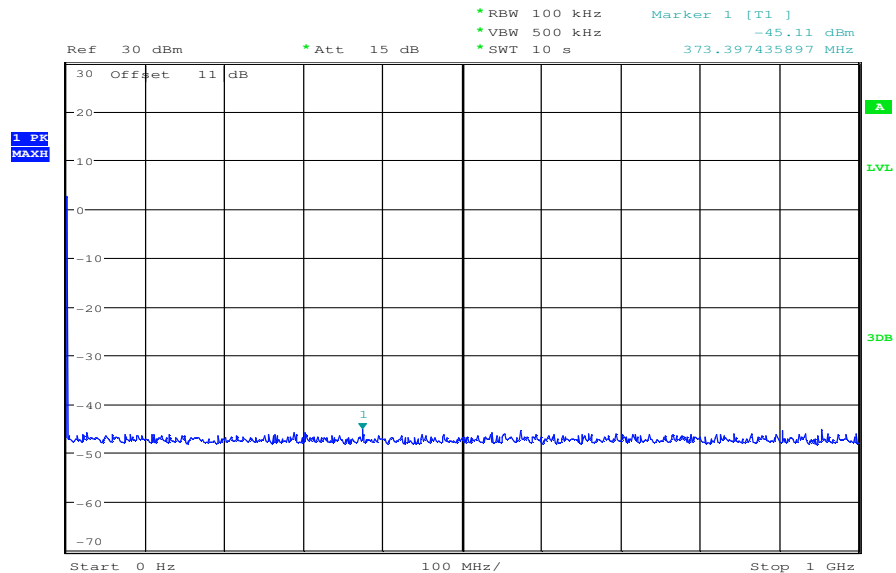
Plots: OFDM / g – mode**Plot 1: TX mode, lowest channel, up to 1 GHz**

Date: 25.JAN.2012 11:54:09

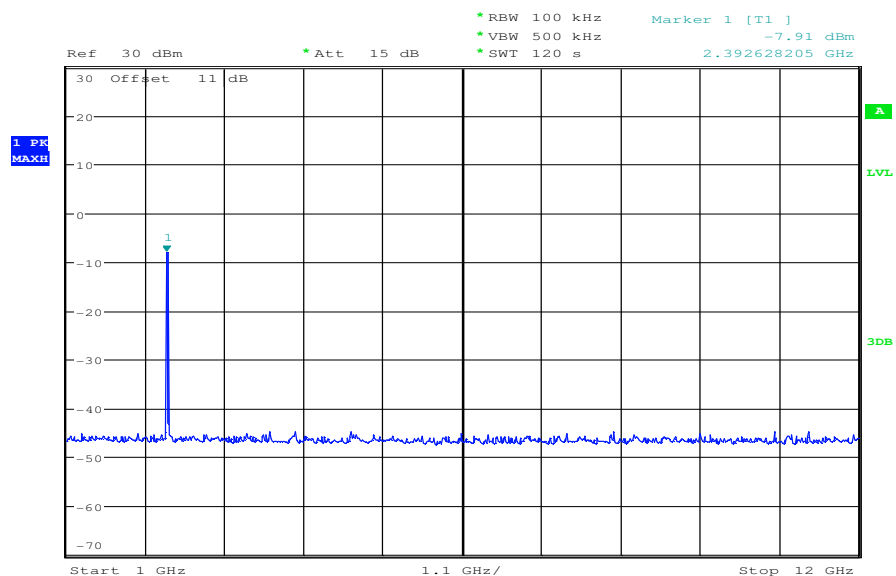*The peak at the beginning of the plot is the LO from the SA.***Plot 2: TX mode, lowest channel, 1 GHz to 12 GHz**


Date: 25.JAN.2012 11:56:42

Plot 3: TX mode, lowest channel, 12 GHz to 25 GHz

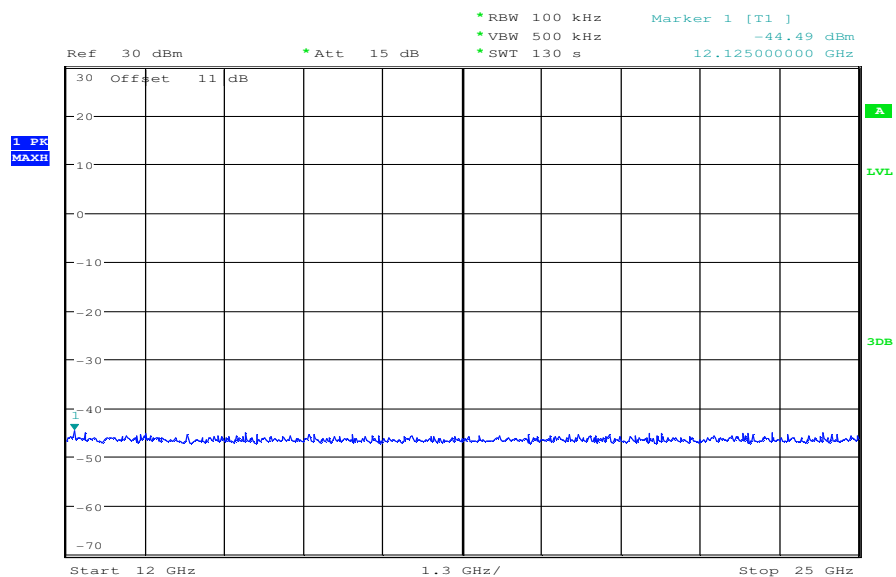

Date: 25.JAN.2012 11:59:20


Plot 4: TX mode, middle channel, up to 1 GHz

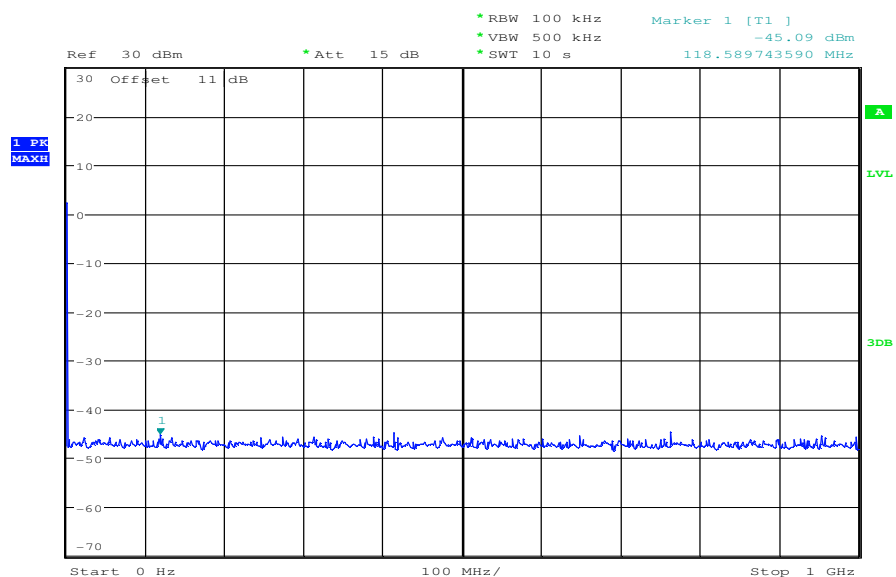

Date: 25.JAN.2012 11:31:25


The peak at the beginning of the plot is the LO from the SA.

Plot 5: TX mode, middle channel, 1 GHz to 12 GHz

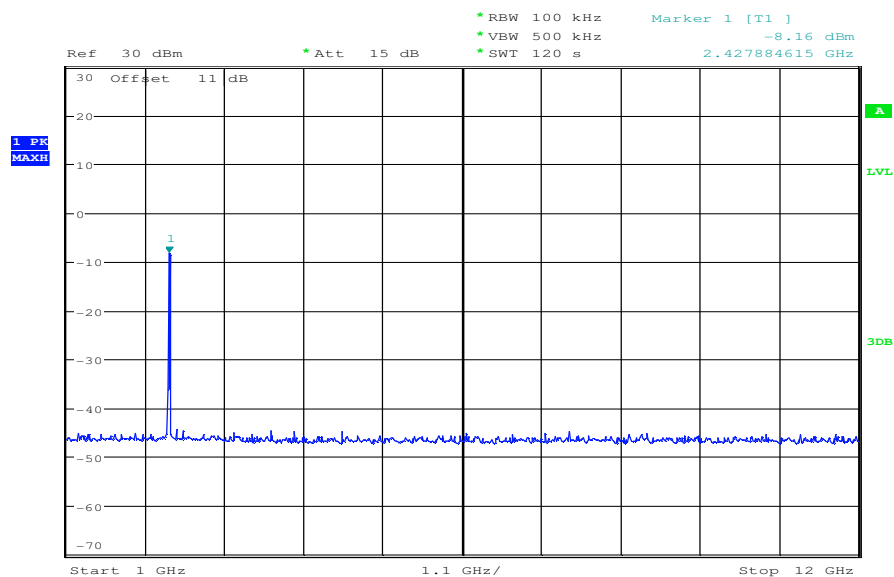


Date: 25.JAN.2012 11:34:07


Plot 6: TX mode, middle channel, 12 GHz to 25 GHz

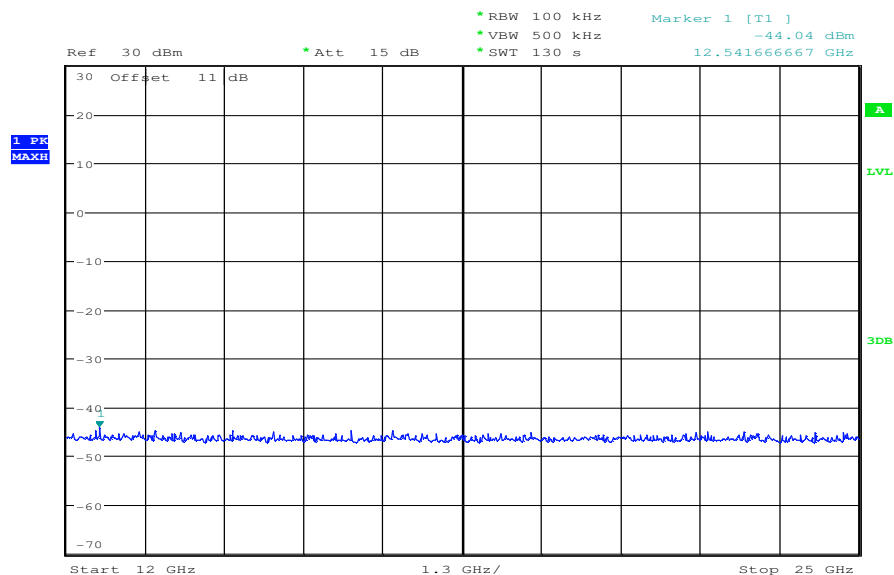

Date: 25.JAN.2012 11:36:48

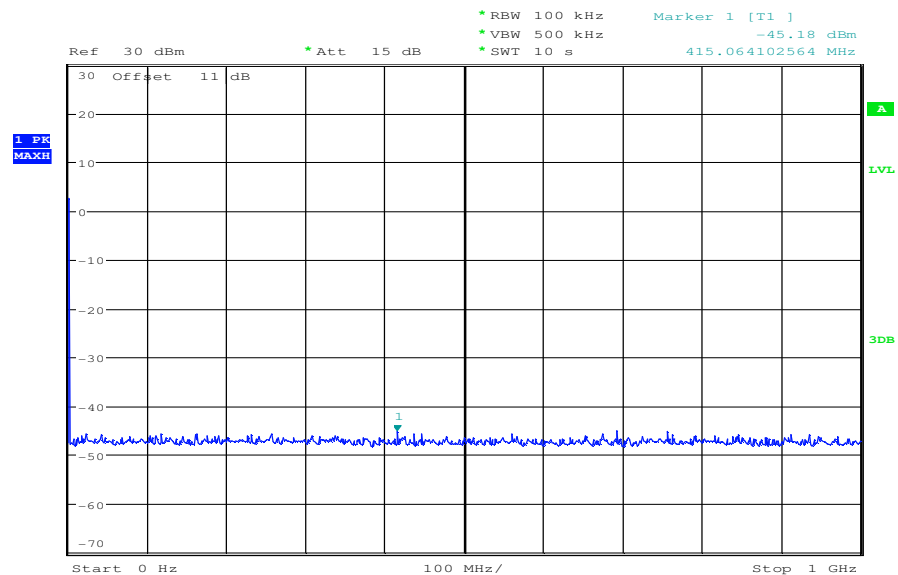
Plot 7: TX mode, highest channel, up to 1 GHz

Date: 25.JAN.2012 11:17:14

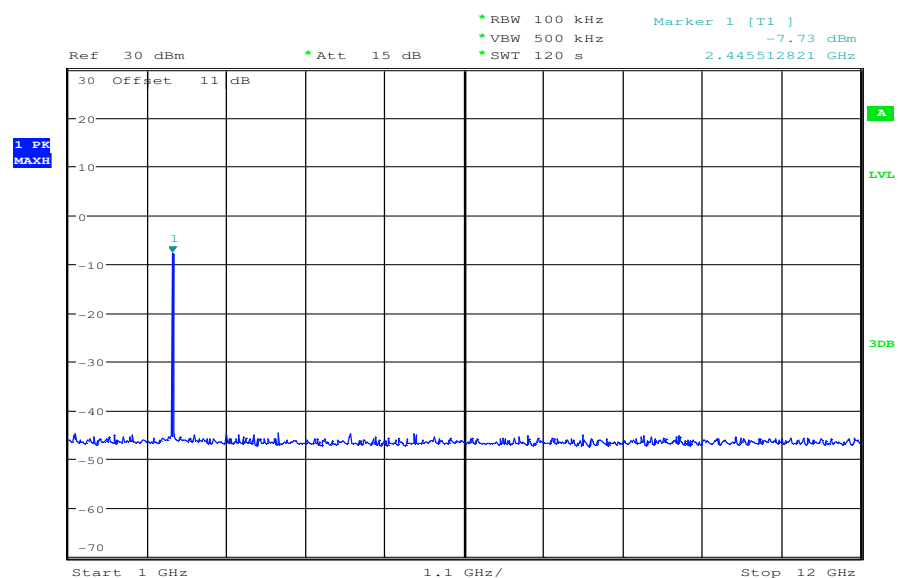*The peak at the beginning of the plot is the LO from the SA.***Plot 8:** TX mode, highest channel, 1 GHz to 12 GHz

Date: 25.JAN.2012 11:19:50

Plot 9: TX mode, highest channel, 12 GHz to 25 GHz

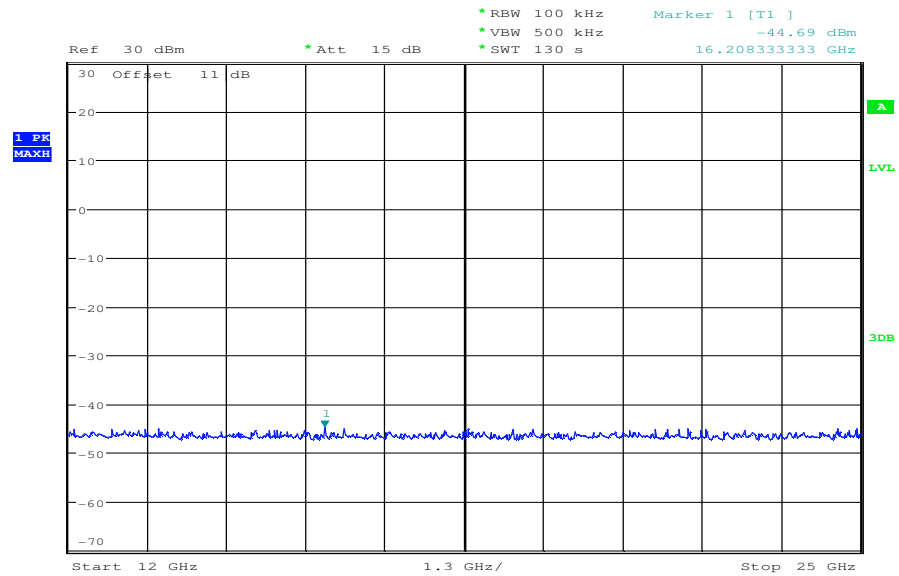

Date: 25.JAN.2012 11:22:27

9.10 TX spurious emissions radiated

Description:

Measurement of the radiated spurious emissions in transmit mode. The measurement is performed at channel 1, 6 and 11. The measurement is repeated for all modulations.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Video bandwidth:	Sweep: 100 kHz Remeasurement: 10 Hz
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 1 MHz
Span:	30 MHz to 25 GHz
Trace-Mode:	Max Hold
Measured Modulation	☒ DSSS b – mode ☒ OFDM g – mode

The modulation with the highest output power was used to perform the transmitter spurious emissions. If spurious were detected a re-measurement was performed on the detected frequency with each modulation.

Limits:

FCC	IC	
CFR Part 15.247(d)	RSS 210, Issue 8, A 8.5	
TX Spurious Emissions Radiated		
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).		
§15.209		
Frequency (MHz)	Field Strength (dBµV/m)	Measurement distance
30 - 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10
Above 960	54.0	3

Results: DSSS / b – mode

TX Spurious Emissions Radiated [dBμV/m]								
DSSS – mode								
2412 MHz			2437 MHz			2462 MHz		
F [MHz]	Detector	Level [dBμV/m]	F [MHz]	Detector	Level [dBμV/m]	F [MHz]	Detector	Level [dBμV/m]
For emissions below 10 GHz, please take a look at the table below the plots.			For emissions below 10 GHz, please take a look at the table below the plots.			For emissions below 10 GHz, please take a look at the table below the plots.		
For emissions above 10 GHz, please take a look at the plots.			For emissions above 10 GHz, please take a look at the plots.			For emissions above 10 GHz, please take a look at the plots.		
Measurement uncertainty			± 3 dB					

Result: The result of the measurement is passed.**Results: OFDM / g – mode**

TX Spurious Emissions Radiated [dBμV/m]								
OFDM – mode								
2412 MHz			2437 MHz			2462 MHz		
F [MHz]	Detector	Level [dBμV/m]	F [MHz]	Detector	Level [dBμV/m]	F [MHz]	Detector	Level [dBμV/m]
For emissions below 10 GHz, please take a look at the table below the plots.			For emissions below 10 GHz, please take a look at the table below the plots.			For emissions below 10 GHz, please take a look at the table below the plots.		
For emissions above 10 GHz, please take a look at the plots.			For emissions above 10 GHz, please take a look at the plots.			For emissions above 10 GHz, please take a look at the plots.		
Measurement uncertainty			± 3 dB					

Result: The result of the measurement is passed.

Plots: DSSS / b – mode (These plots are also valid for g-mode and represent the worst case results)
Plot 1: Lowest channel, 30 MHz to 1 GHz, vertical & horizontal polarization


Common Information

EUT: E60
 Serial Number: 49000002
 Test Description: FCC 15
 Operating Conditions: WLAN testmode, channel 1, charging
 Operator Name: Kraus
 Comment: Power 115V/60Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Level Unit: dB μ V/m

Subrange	Detectors	IF Bandwidth	Meas. Time	Receiver
30 MHz - 2 GHz	QuasiPeak	120 kHz	15 s	Receiver

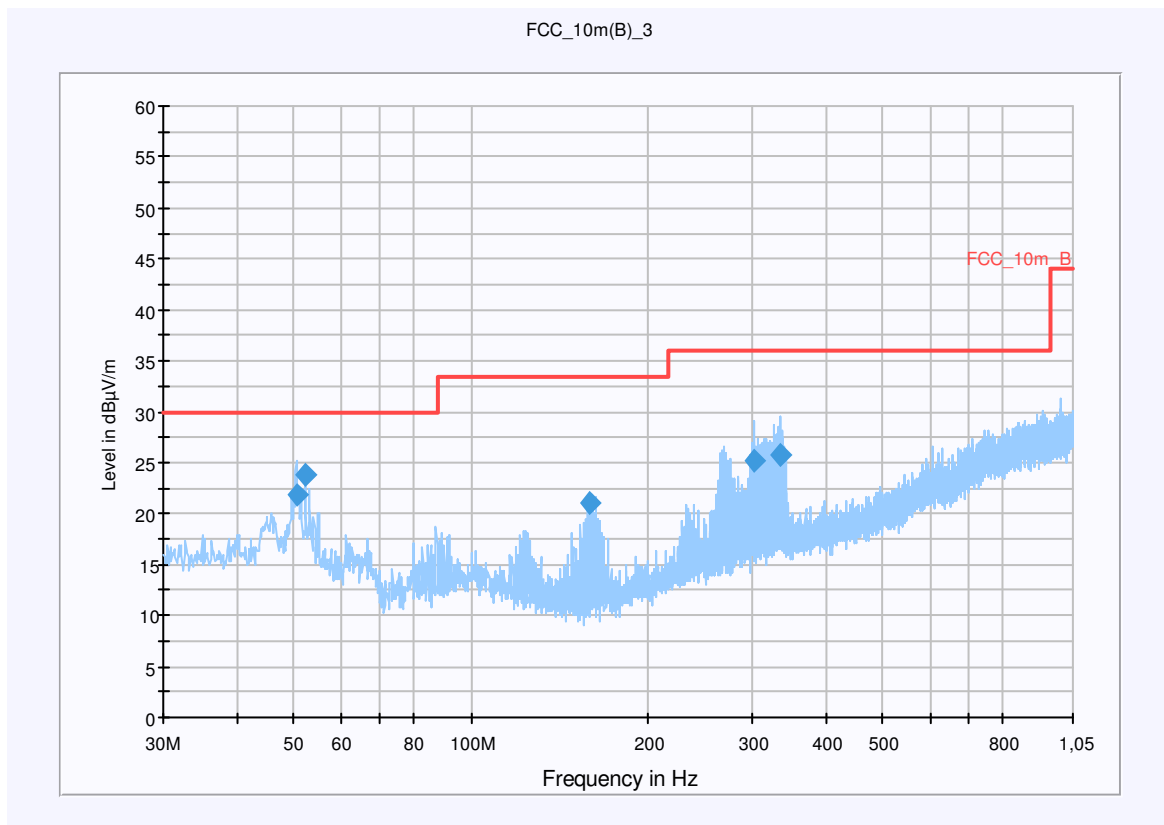
Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Comment
50.566050	21.8	15000.000	120.000	98.0	V	10.0	13.3	8.2	30.0	
52.377600	23.8	15000.000	120.000	98.0	V	106.0	13.1	6.2	30.0	
158.968350	21.0	15000.000	120.000	105.0	V	269.0	9.2	12.5	33.5	
303.211500	25.2	15000.000	120.000	98.0	V	-6.0	14.6	10.8	36.0	
333.553650	25.8	15000.000	120.000	98.0	V	-2.0	15.6	10.2	36.0	

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]

Subrange 1


Frequency Range:	30 MHz - 2 GHz
Receiver:	Receiver [ESCI 3] @ GPIB0 (ADR 20), SN 100083/003, FW 4.42
Signal Path:	without Notch FW 1.0
Antenna:	VULB 9163 SN 9163-295, FW --- Correction Table (vertical): VULP6113 Correction Table (horizontal): VULP6113 Correction Table: Cable_EN_1GHz (1005)
Antenna Tower:	Tower [EMCO 2090 Antenna Tower] @ GPIB0 (ADR 8), FW REV 3.12
Turntable:	Turntable [EMCO Turntable] @ GPIB0 (ADR 9), FW REV 3.12

EMC 32 Version 8.10.00

Plot 2: Lowest channel, 1 GHz to 10 GHz, vertical & horizontal polarization

Common Information

EUT: E60
 Serial Number: 49000002
 Test Description: FCC 15
 Operating Conditions: WLAN testmode, channel 1, charging
 Operator Name: Kraus
 Comment: Power 115V/60Hz

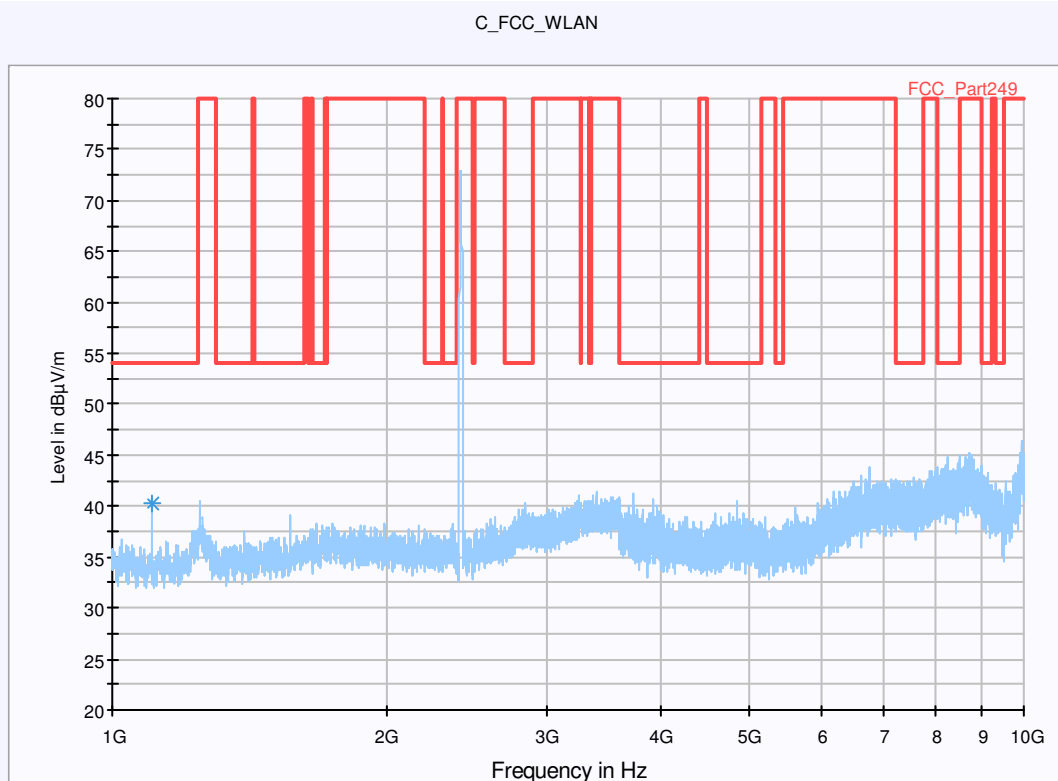

The carrier signal is slightly suppressed with a 2.4 GHz band rejection filter.

Data Reduction 1 [1]

Frequency (MHz)	MaxPeak-MaxHold (dBµV/m)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Comment
1104.700000	40.3	100.0	H	317.0	-4.8	

Hardware Setup: EMI radiated\C_MATRIX - [EMI radiated]

Subrange 1

Frequency Range: 1 GHz - 4 GHz

Receiver: ESU [ESU 26]
@ GPIB0 (ADR 17), SN 100037/026, FW 4.43

Signal Path: EN_NOTCH
FW 1.0
Correction Table: LNA_EN (Notch)
Correction Table: 3_5m

Antenna: BBHA 9120 B
Correction Table (vertical): BBHA9120
Correction Table (horizontal): BBHA9120
Correction Table: Cable_Horn_EN (1103)

Antenna Tower: Generic Tripod [Generic Tripod]
@ GPIB0 (ADR 19), SN ?

Turntable: Turntable [EMCO Turntable]
@ GPIB0 (ADR 9), FW REV 3.12

Subrange 2

Frequency Range: 4 GHz - 10 GHz

Receiver: ESU [ESU 26]
@ GPIB0 (ADR 17), SN 100037/026, FW 4.43


Signal Path: EN_HP
Correction Table: 3_5m
Correction Table: LNA_EN (HP)

Antenna: BBHA 9120 B
Correction Table (vertical): BBHA9120
Correction Table (horizontal): BBHA9120
Correction Table: Cable_Horn_EN (1103)

Antenna Tower: Generic Tripod [Generic Tripod]
@ GPIB0 (ADR 19), SN ?


Turntable: Turntable [EMCO Turntable]
@ GPIB0 (ADR 9), FW REV 3.12

Plot 3: Lowest channel, 10 GHz to 18 GHz, vertical & horizontal polarization

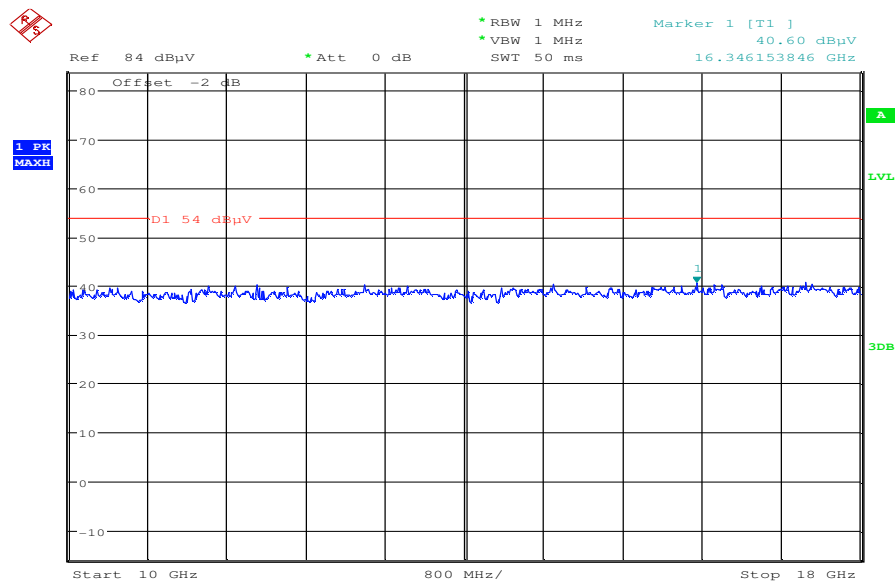

Date: 20.APR.2011 16:32:36

Plot 4: Lowest channel, 18 GHz to 25 GHz, vertical & horizontal polarization

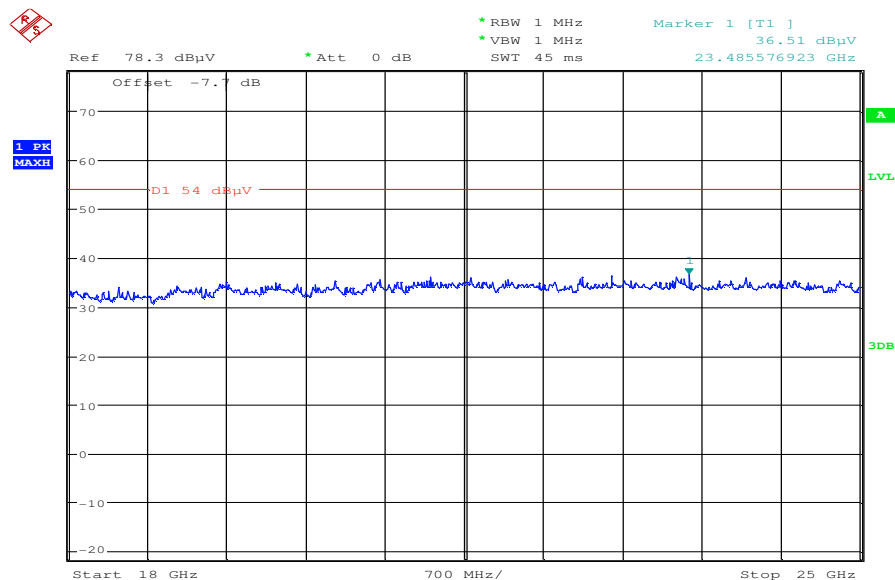

Date: 20.APR.2011 17:03:53

Plot 5: Middle channel, 30 MHz to 1 GHz, vertical & horizontal polarization


Common Information

EUT: E60
 Serial Number: 49000002
 Test Description: FCC 15
 Operating Conditions: WLAN testmode, channel 6, charging
 Operator Name: Kraus
 Comment: Power 115V/60Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Level Unit: dB μ V/m

Subrange	Detectors	IF Bandwidth	Meas. Time	Receiver
30 MHz - 2 GHz	QuasiPeak	120 kHz	15 s	Receiver

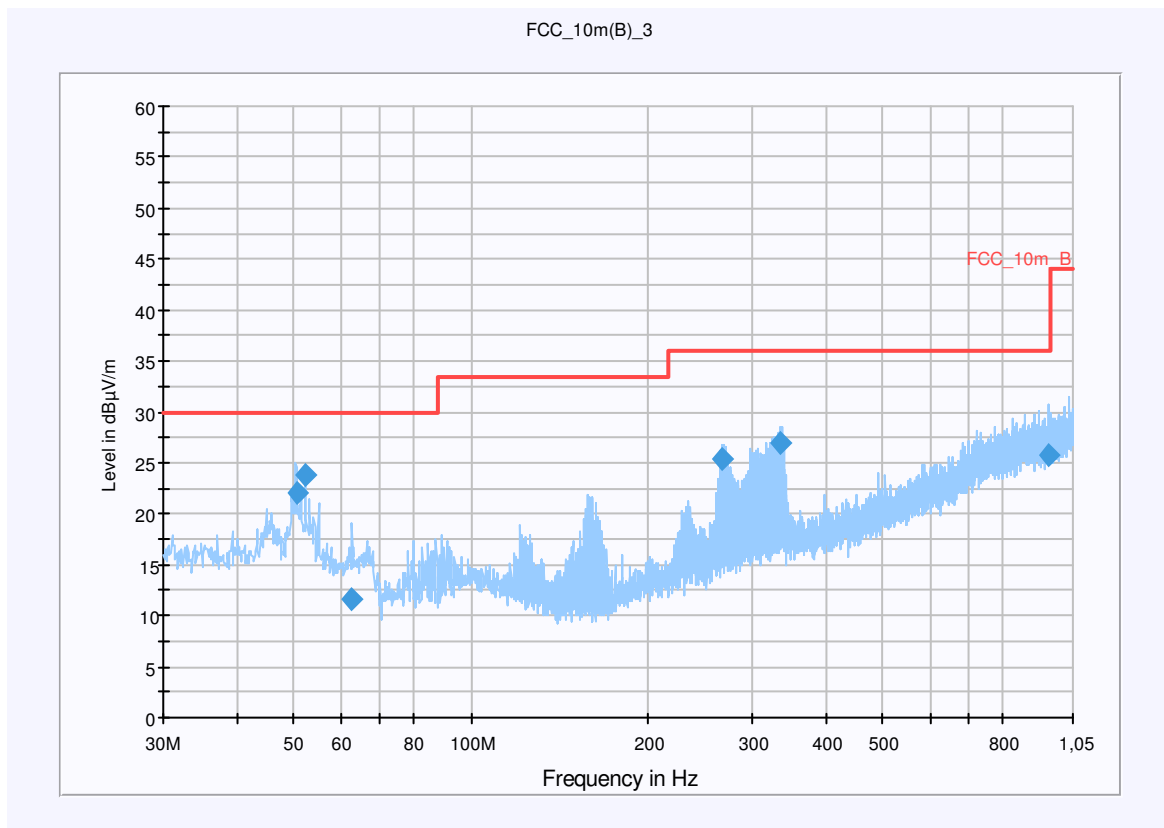

Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Comment
50.547000	22.1	15000.000	120.000	106.0	V	86.0	13.3	7.9	30.0	
52.372650	23.7	15000.000	120.000	98.0	V	89.0	13.1	6.3	30.0	
62.817000	11.6	15000.000	120.000	250.0	V	189.0	10.9	18.4	30.0	
266.499450	25.4	15000.000	120.000	98.0	V	0.0	13.7	10.6	36.0	
333.551850	27.0	15000.000	120.000	98.0	V	283.0	15.6	9.0	36.0	
957.367500	25.8	15000.000	120.000	106.0	H	0.0	25.4	10.2	36.0	

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]

Subrange 1


Frequency Range:	30 MHz - 2 GHz
Receiver:	Receiver [ESCI 3] @ GPIB0 (ADR 20), SN 100083/003, FW 4.42
Signal Path:	without Notch FW 1.0
Antenna:	VULB 9163 SN 9163-295, FW --- Correction Table (vertical): VULP6113 Correction Table (horizontal): VULP6113 Correction Table: Cable_EN_1GHz (1005)
Antenna Tower:	Tower [EMCO 2090 Antenna Tower] @ GPIB0 (ADR 8), FW REV 3.12
Turntable:	Turntable [EMCO Turntable] @ GPIB0 (ADR 9), FW REV 3.12

EMC 32 Version 8.10.00

Plot 6: Middle channel, 1 GHz to 10 GHz, vertical & horizontal polarization

Common Information

EUT: E60
 Serial Number: 49000002
 Test Description: FCC 15
 Operating Conditions: WLAN testmode, channel 6, charging
 Operator Name: Kraus
 Comment: Power 115V/60Hz

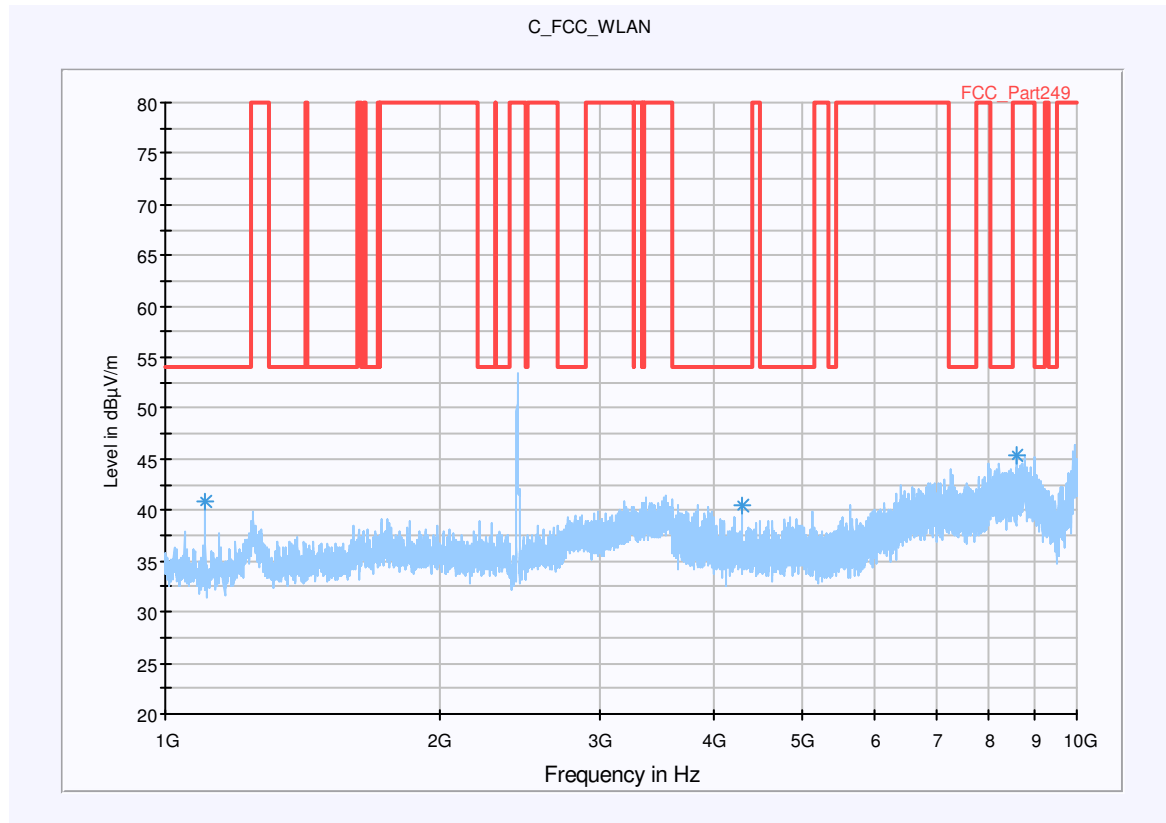

The carrier signal is slightly suppressed with a 2.4 GHz band rejection filter.

Data Reduction 1 [1]

Frequency (MHz)	MaxPeak-MaxHold (dBµV/m)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Comment
1104.400000	40.8	100.0	H	317.0	-4.8	
4294.000000	40.5	100.0	H	317.0	0.4	
8611.000000	45.4	100.0	H	179.0	7.1	

Hardware Setup: EMI radiated\C_MATRIX - [EMI radiated]

Subrange 1

Frequency Range: 1 GHz - 4 GHz

Receiver: ESU [ESU 26]
@ GPIB0 (ADR 17), SN 100037/026, FW 4.43

Signal Path: EN_NOTCH
FW 1.0
Correction Table: LNA_EN (Notch)
Correction Table: 3_5m

Antenna: BBHA 9120 B
Correction Table (vertical): BBHA9120
Correction Table (horizontal): BBHA9120
Correction Table: Cable_Horn_EN (1103)

Antenna Tower: Generic Tripod [Generic Tripod]
@ GPIB0 (ADR 19), SN ?

Turntable: Turntable [EMCO Turntable]
@ GPIB0 (ADR 9), FW REV 3.12

Subrange 2

Frequency Range: 4 GHz - 10 GHz

Receiver: ESU [ESU 26]
@ GPIB0 (ADR 17), SN 100037/026, FW 4.43


Signal Path: EN_HP
Correction Table: 3_5m
Correction Table: LNA_EN (HP)

Antenna: BBHA 9120 B
Correction Table (vertical): BBHA9120
Correction Table (horizontal): BBHA9120
Correction Table: Cable_Horn_EN (1103)

Antenna Tower: Generic Tripod [Generic Tripod]
@ GPIB0 (ADR 19), SN ?


Turntable: Turntable [EMCO Turntable]
@ GPIB0 (ADR 9), FW REV 3.12

Plot 7: Middle channel, 10 GHz to 18 GHz, vertical & horizontal polarization

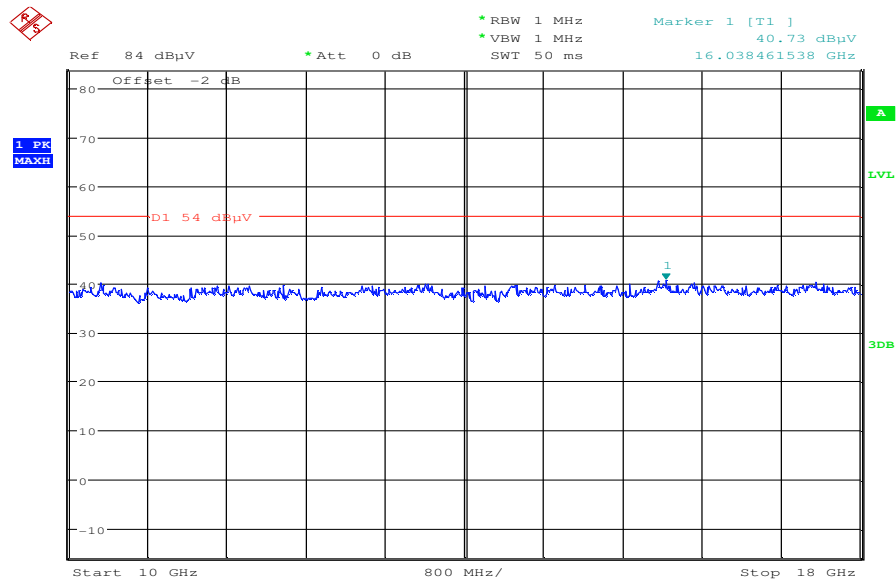

Date: 20.APR.2011 16:34:29

Plot 8: Middle channel, 18 GHz to 25 GHz, vertical & horizontal polarization

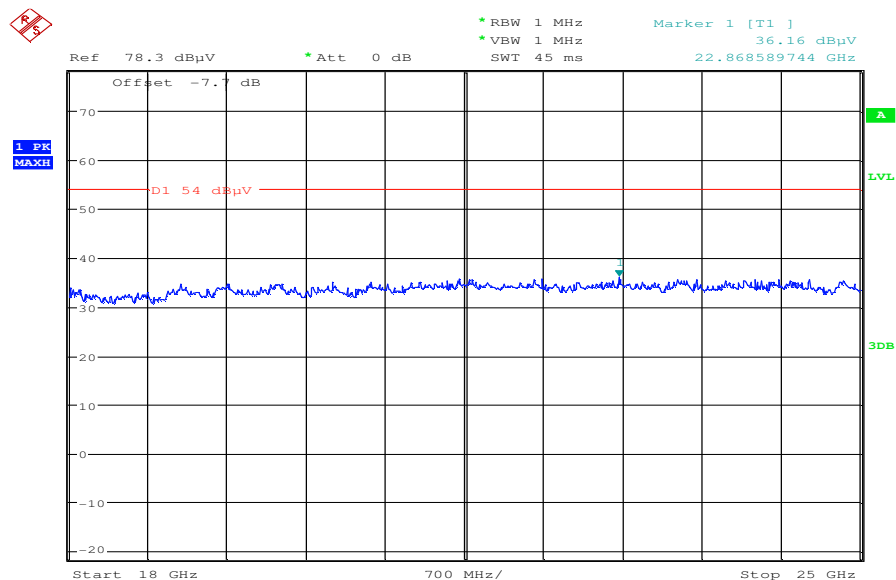

Date: 20.APR.2011 17:01:42

Plot 9: Highest channel, 30 MHz to 1 GHz, vertical & horizontal polarization


Common Information

EUT: E60
 Serial Number: 49000002
 Test Description: FCC 15
 Operating Conditions: WLAN testmode, channel 11, charging
 Comment: Power 115V/60Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Level Unit: dB μ V/m

Subrange	Detectors	IF Bandwidth	Meas. Time	Receiver
30 MHz - 2 GHz	QuasiPeak	120 kHz	15 s	Receiver

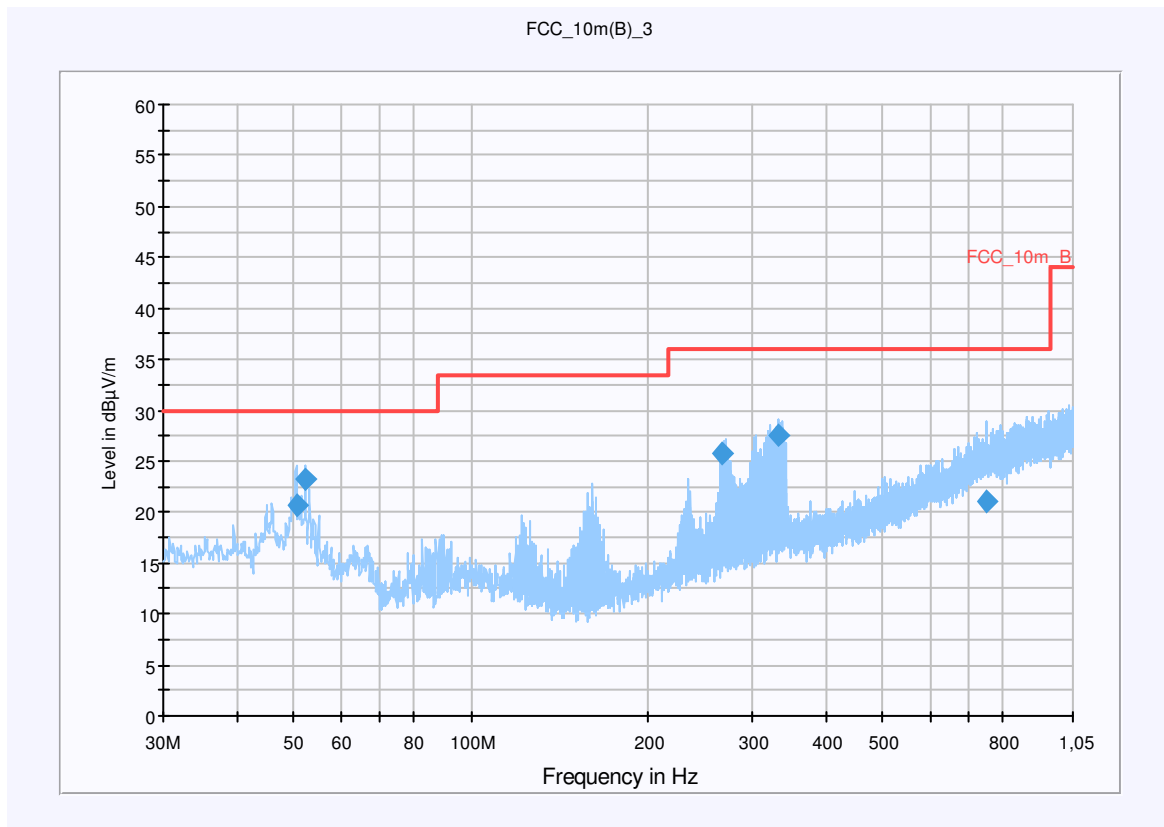

Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Comment
50.574600	20.8	15000.000	120.000	98.0	V	176.0	13.3	9.2	30.0	
52.382700	23.1	15000.000	120.000	98.0	V	10.0	13.1	6.9	30.0	
267.395100	25.8	15000.000	120.000	98.0	V	-6.0	13.7	10.2	36.0	
331.685700	27.5	15000.000	120.000	98.0	V	271.0	15.5	8.5	36.0	
751.108650	21.1	15000.000	120.000	148.0	H	83.0	23.7	14.9	36.0	

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]

Subrange 1


Frequency Range:	30 MHz - 2 GHz
Receiver:	Receiver [ESCI 3] @ GPIB0 (ADR 20), SN 100083/003, FW 4.42
Signal Path:	without Notch FW 1.0
Antenna:	VULB 9163 SN 9163-295, FW --- Correction Table (vertical): VULP6113 Correction Table (horizontal): VULP6113 Correction Table: Cable_EN_1GHz (1005)
Antenna Tower:	Tower [EMCO 2090 Antenna Tower] @ GPIB0 (ADR 8), FW REV 3.12
Turntable:	Turntable [EMCO Turntable] @ GPIB0 (ADR 9), FW REV 3.12

EMC 32 Version 8.10.00

Plot 10: Highest channel, 1 GHz to 10 GHz, vertical & horizontal polarization

Common Information

EUT: E60
 Serial Number: 49000002
 Test Description: FCC 15
 Operating Conditions: WLAN testmode, channel 11, charging
 Comment: Power 115V/60Hz

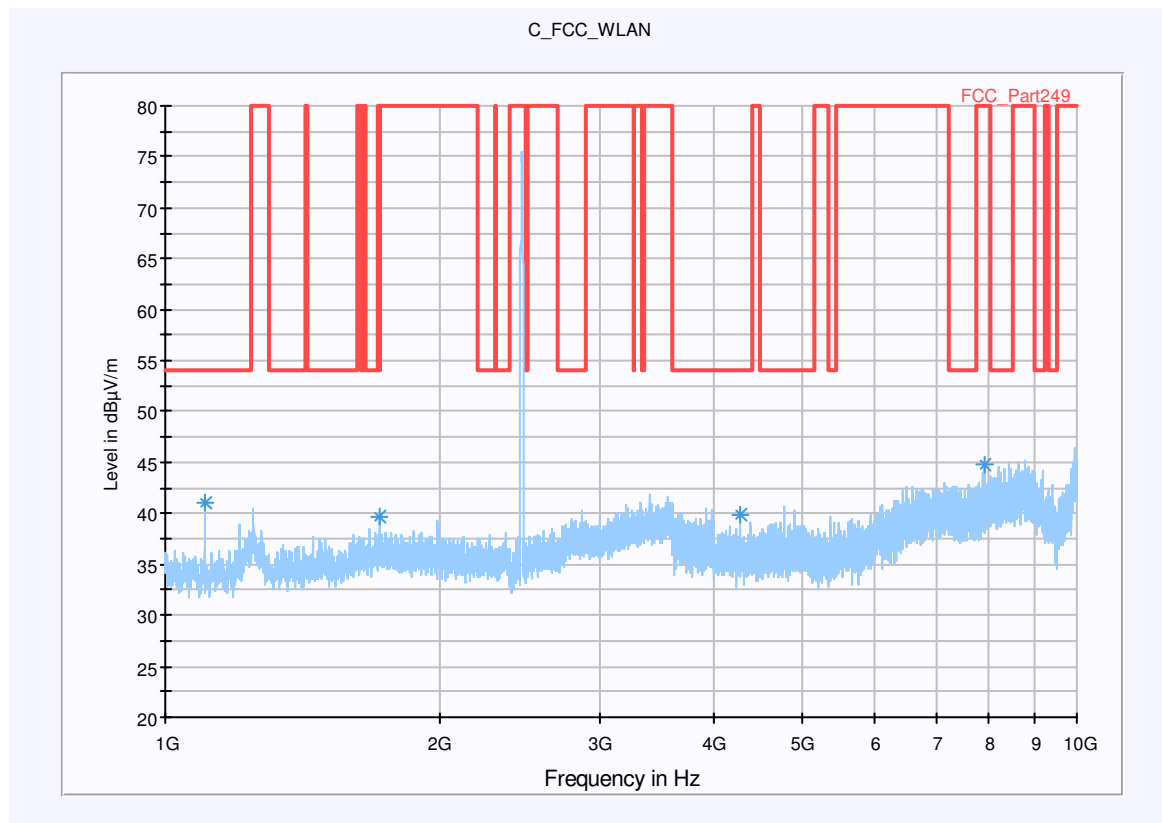

The carrier signal is slightly suppressed with a 2.4 GHz band rejection filter.

Data Reduction 1 [1]

Frequency (MHz)	MaxPeak-MaxHold (dBμV/m)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Comment
1104.700000	41.0	100.0	H	317.0	-4.8	
7915.600000	44.8	100.0	V	317.0	6.4	
4264.000000	39.9	100.0	V	317.0	0.3	
1721.800000	39.6	100.0	V	47.0	-2.4	

Hardware Setup: EMI radiated\C_MATRIX - [EMI radiated]

Subrange 1

Frequency Range: 1 GHz - 4 GHz

Receiver: ESU [ESU 26]
@ GPIB0 (ADR 17), SN 100037/026, FW 4.43

Signal Path: EN_NOTCH
FW 1.0
Correction Table: LNA_EN (Notch)
Correction Table: 3_5m

Antenna: BBHA 9120 B
Correction Table (vertical): BBHA9120
Correction Table (horizontal): BBHA9120
Correction Table: Cable_Horn_EN (1103)

Antenna Tower: Generic Tripod [Generic Tripod]
@ GPIB0 (ADR 19), SN ?

Turntable: Turntable [EMCO Turntable]
@ GPIB0 (ADR 9), FW REV 3.12

Subrange 2

Frequency Range: 4 GHz - 10 GHz

Receiver: ESU [ESU 26]
@ GPIB0 (ADR 17), SN 100037/026, FW 4.43


Signal Path: EN_HP
Correction Table: 3_5m
Correction Table: LNA_EN (HP)

Antenna: BBHA 9120 B
Correction Table (vertical): BBHA9120
Correction Table (horizontal): BBHA9120
Correction Table: Cable_Horn_EN (1103)

Antenna Tower: Generic Tripod [Generic Tripod]
@ GPIB0 (ADR 19), SN ?


Turntable: Turntable [EMCO Turntable]
@ GPIB0 (ADR 9), FW REV 3.12

Plot 11: Highest channel, 10 GHz to 18 GHz, vertical & horizontal polarization

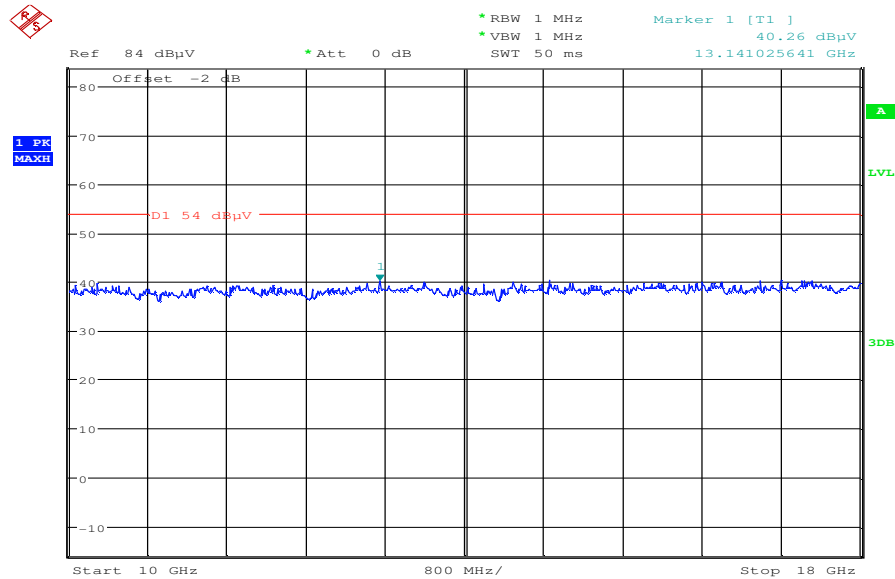

Date: 20.APR.2011 16:36:13

Plot 12: Highest channel, 18 GHz to 25 GHz, vertical & horizontal polarization

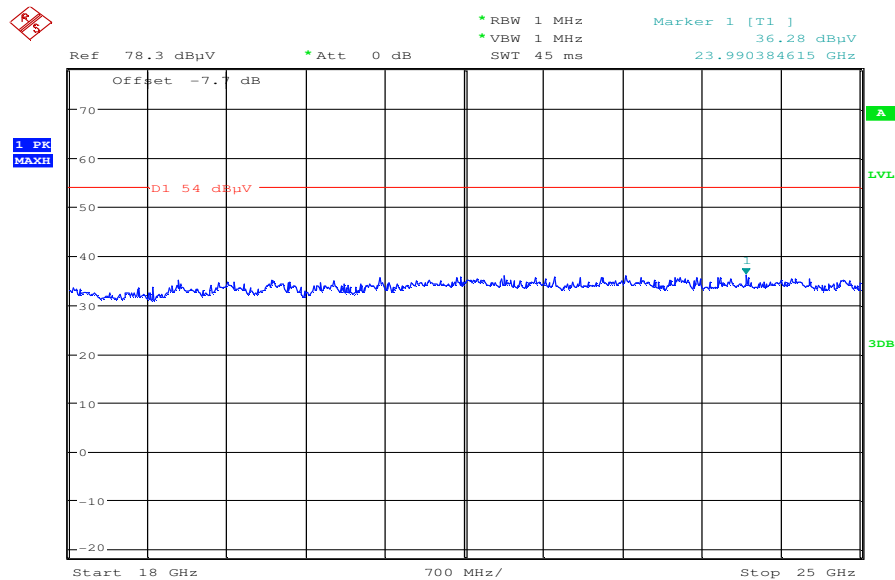

Date: 20.APR.2011 17:00:11

9.11 RX spurious emissions radiated

Description:

Measurement of the radiated spurious emissions in idle/receive mode. The results are valid for both modes.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Video bandwidth:	Sweep: 100 kHz Remeasurement: 10 Hz
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 1 MHz
Span:	30 MHz to 25 GHz
Trace-Mode:	Max Hold

Limits:

FCC		IC
CFR Part 15.109		RSS Gen, Issue 2, 4.10
RX Spurious Emissions Radiated		
Frequency (MHz)	Field Strength (dB μ V/m)	Measurement distance
30 - 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10
Above 960	54.0	3

Results:

RX Spurious Emissions Radiated [dB μ V/m]		
F [MHz]	Detector	Level [dB μ V/m]
For emissions below 10 GHz, please take a look at the table below the plots.	For emissions below 10 GHz, please take a look at the table below the plots.	For emissions below 10 GHz, please take a look at the table below the plots.
For emissions above 10 GHz, please take a look at the plots.	For emissions above 10 GHz, please take a look at the plots.	For emissions above 10 GHz, please take a look at the plots.
Measurement uncertainty	± 3 dB	

Result: The result of the measurement is passed.


Plots: RX / Idle – mode**Plot 1:** 30 MHz to 1 GHz, vertical & horizontal polarization**Common Information**

EUT: E60
 Serial Number: 49000002
 Test Description: FCC 15
 Operating Conditions: WLAN testmode, RX, charging
 Operator Name: Hennemann
 Comment: Power 115V/60Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Level Unit: dB μ V/m

Subrange	Detectors	IF Bandwidth	Meas. Time	Receiver
30 MHz - 2 GHz	QuasiPeak	120 kHz	15 s	Receiver

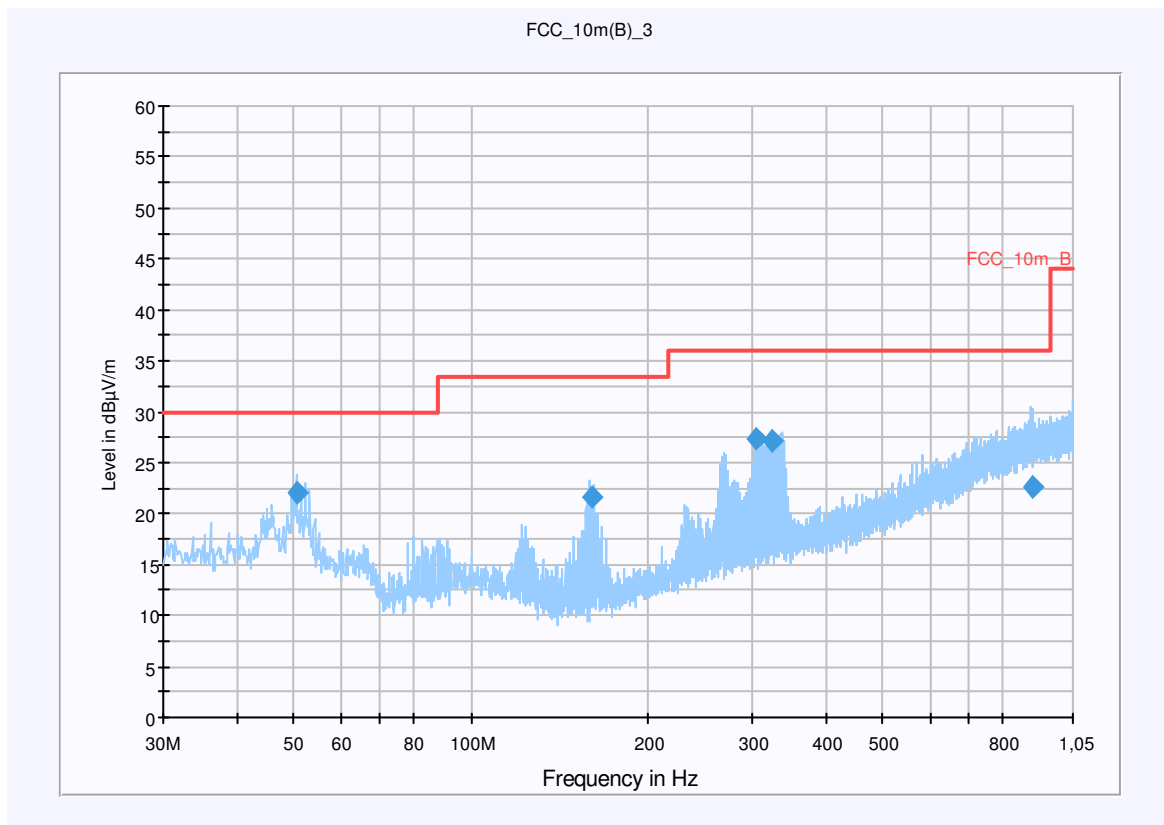**Final Result 1**

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Comment
50.558850	22.1	15000.000	120.000	98.0	V	275.0	13.3	7.9	30.0	
159.970350	21.7	15000.000	120.000	98.0	V	268.0	9.2	11.8	33.5	
305.179800	27.3	15000.000	120.000	98.0	V	284.0	14.7	8.7	36.0	
323.584500	27.1	15000.000	120.000	98.0	V	284.0	15.3	8.9	36.0	
895.080000	22.6	15000.000	120.000	350.0	H	-2.0	25.1	13.4	36.0	

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]

Subrange 1


Frequency Range:	30 MHz - 2 GHz
Receiver:	Receiver [ESCI 3] @ GPIB0 (ADR 20), SN 100083/003, FW 4.42
Signal Path:	without Notch FW 1.0
Antenna:	VULB 9163 SN 9163-295, FW --- Correction Table (vertical): VULP6113 Correction Table (horizontal): VULP6113 Correction Table: Cable_EN_1GHz (1005)
Antenna Tower:	Tower [EMCO 2090 Antenna Tower] @ GPIB0 (ADR 8), FW REV 3.12
Turntable:	Turntable [EMCO Turntable] @ GPIB0 (ADR 9), FW REV 3.12

EMC 32 Version 8.10.00

Plot 2: 1 GHz to 10 GHz, vertical & horizontal polarization

Common Information

EUT: E60
 Serial Number: 49000002
 Test Description: FCC 15
 Operating Conditions: WLAN testmode, RX, charging
 Operator Name: Hennemann
 Comment: Power 115V/60Hz

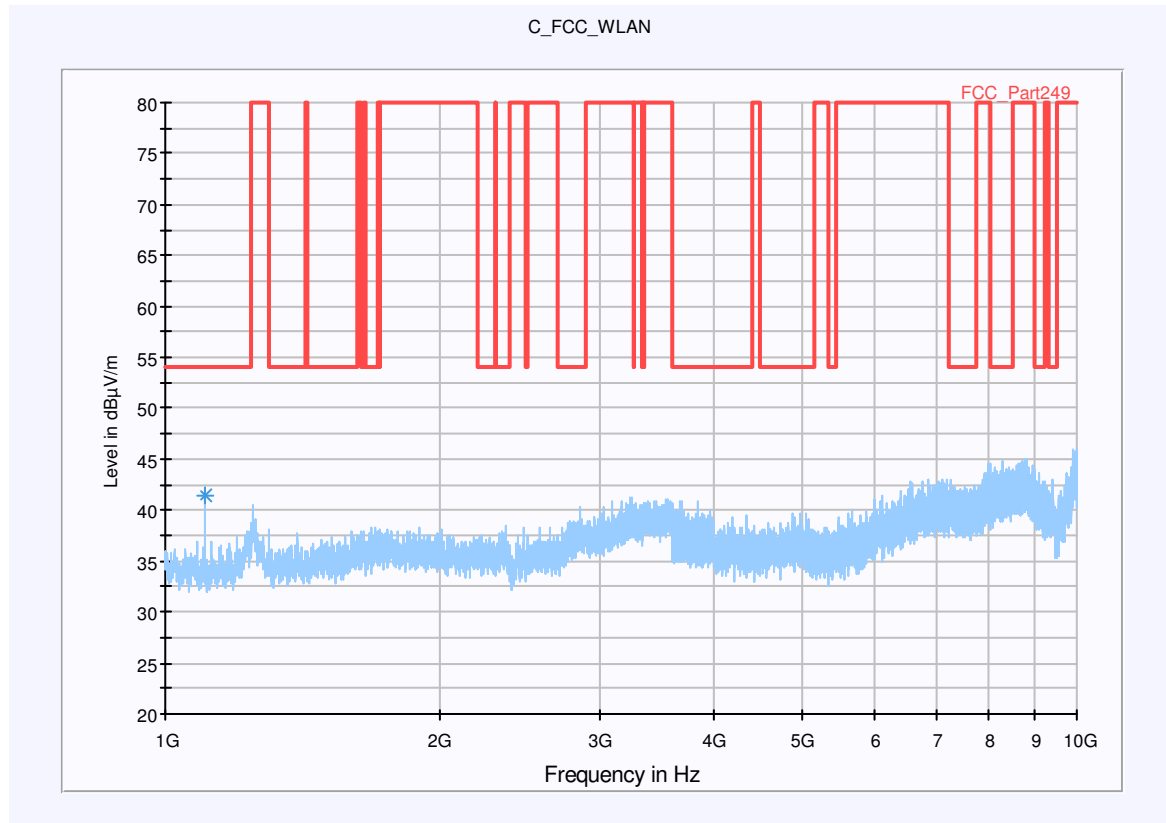

Data Reduction 1 [1]

Frequency (MHz)	MaxPeak-MaxHold (dBµV/m)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Comment
1104.700000	41.5	100.0	H	317.0	-4.8	

Hardware Setup: EMI radiated\C_MATRIX - [EMI radiated]

Subrange 1

Frequency Range: 1 GHz - 4 GHz

Receiver: ESU [ESU 26]
@ GPIB0 (ADR 17), SN 100037/026, FW 4.43

Signal Path: EN_NOTCH
FW 1.0
Correction Table: LNA_EN (Notch)
Correction Table: 3_5m

Antenna: BBHA 9120 B
Correction Table (vertical): BBHA9120
Correction Table (horizontal): BBHA9120
Correction Table: Cable_Horn_EN (1103)

Antenna Tower: Generic Tripod [Generic Tripod]
@ GPIB0 (ADR 19), SN ?

Turntable: Turntable [EMCO Turntable]
@ GPIB0 (ADR 9), FW REV 3.12

Subrange 2

Frequency Range: 4 GHz - 10 GHz


Receiver: ESU [ESU 26]
@ GPIB0 (ADR 17), SN 100037/026, FW 4.43

Signal Path: EN_HP
Correction Table: 3_5m
Correction Table: LNA_EN (HP)


Antenna: BBHA 9120 B
Correction Table (vertical): BBHA9120
Correction Table (horizontal): BBHA9120
Correction Table: Cable_Horn_EN (1103)

Antenna Tower: Generic Tripod [Generic Tripod]
@ GPIB0 (ADR 19), SN ?

Turntable: Turntable [EMCO Turntable]
@ GPIB0 (ADR 9), FW REV 3.12

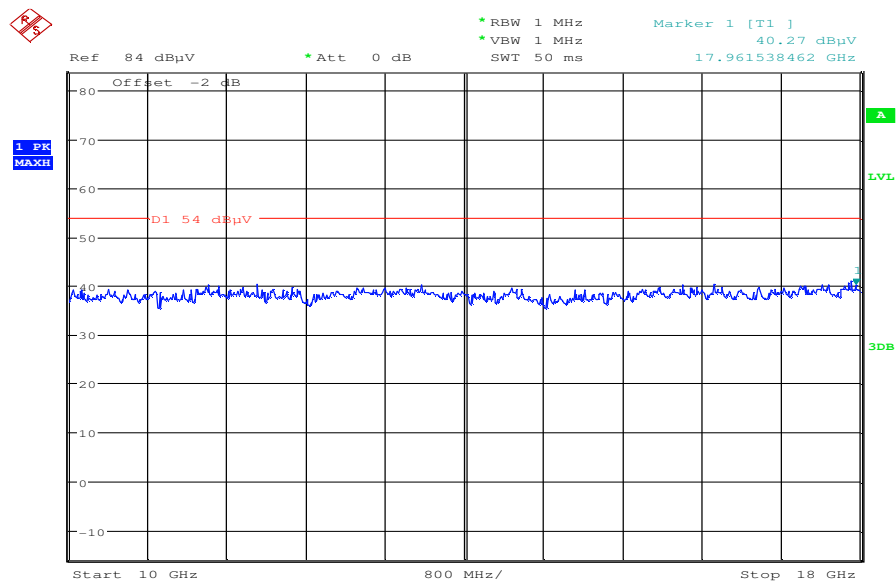Plot 3: 10 GHz to 18 GHz, vertical & horizontal polarization

Date: 21.APR.2011 16:00:42

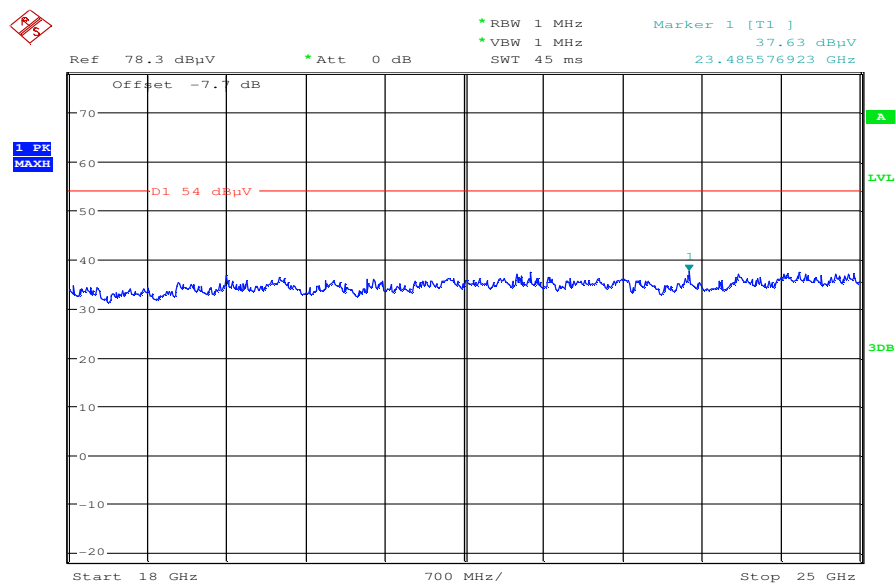Plot 4: 18 GHz to 25 GHz, vertical & horizontal polarization

Date: 21.APR.2011 15:57:59

9.12 TX spurious emissions radiated < 30 MHz

Not performed!

9.13 TX spurious emissions conducted < 30 MHz

Description:

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. The EUT is set to channel 6. This measurement is repeated for DSSS and OFDM modulation. If critical peaks are found channel 1 and channel 11 will be measured too. The measurement is performed with the data rate producing the highest output power. Both power lines, phase and neutral line, are measured. Found peaks are re-measured with average and quasi peak detection to show compliance to the limits.

Measurement:

Measurement parameter	
Detector:	Peak - Quasi Peak / Average
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold

Limits:



FCC		IC	
CFR Part 15.207(a)		ICES-003, Issue 4	
TX Spurious Emissions Conducted < 30 MHz			
Frequency (MHz)	Quasi-Peak (dBμV/m)	Average (dBμV/m)	
0.15 – 0.5	66 to 56*	56 to 46*	
0.5 – 5	56	46	
5 – 30.0	60	50	

*Decreases with the logarithm of the frequency


Results:

TX Spurious Emissions Conducted < 30 MHz [dBμV/m]		
F [MHz]	Detector	Level [dBμV/m]
No critical peaks detected		
Measurement uncertainty	± 3 dB	


Result: The measurement is passed.

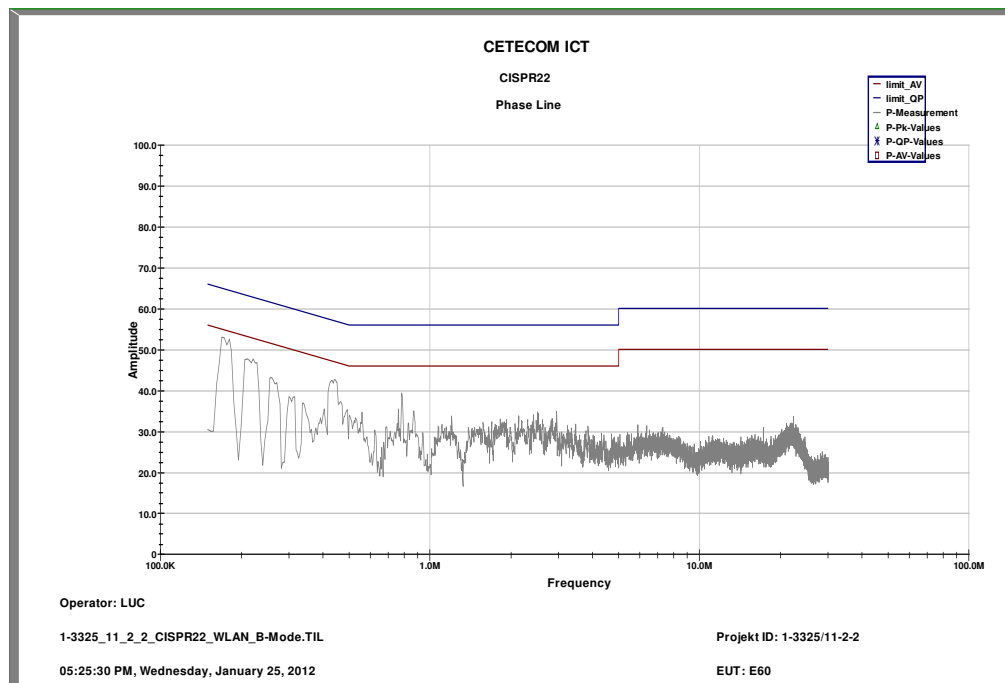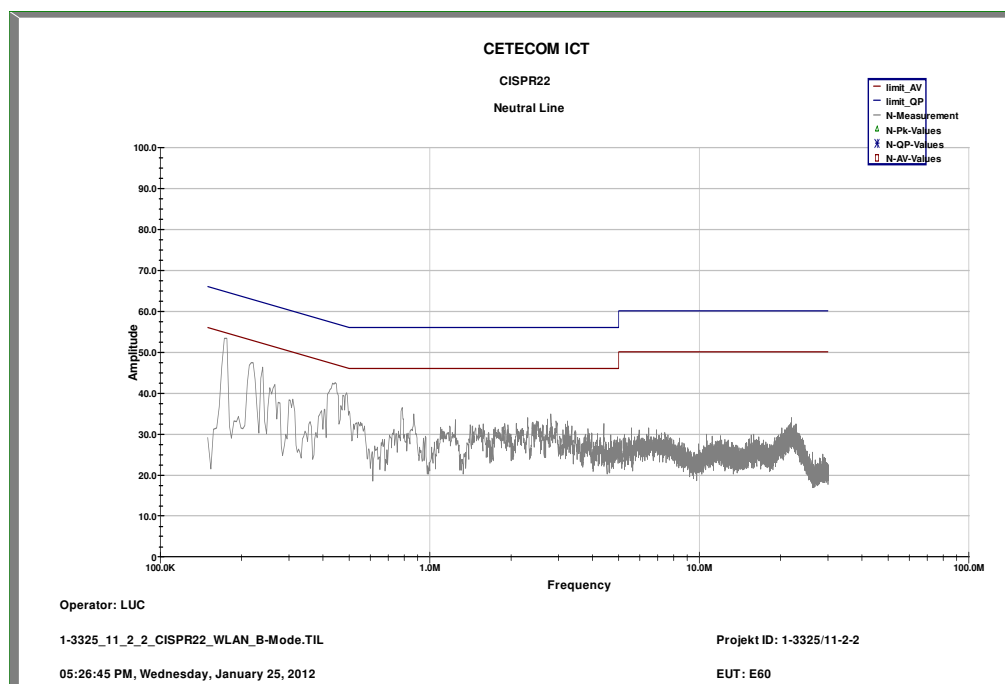Plots:**Plot 1:** DSSS / b – mode, 9 kHz to 30 MHz, phase line**Plot 2:** DSSS / b – mode, 9 kHz to 30 MHz, neutral line


Plot 3: OFDM / g – mode, 9 kHz to 30 MHz, phase line

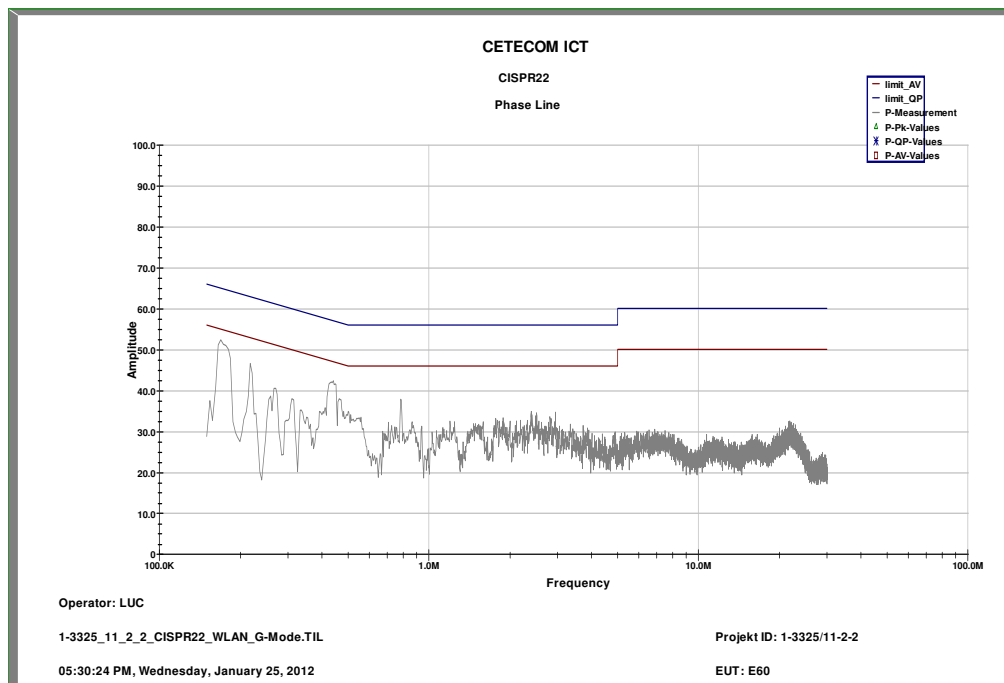


Plot 4: OFDM / g – mode, 9 kHz to 30 MHz, neutral line

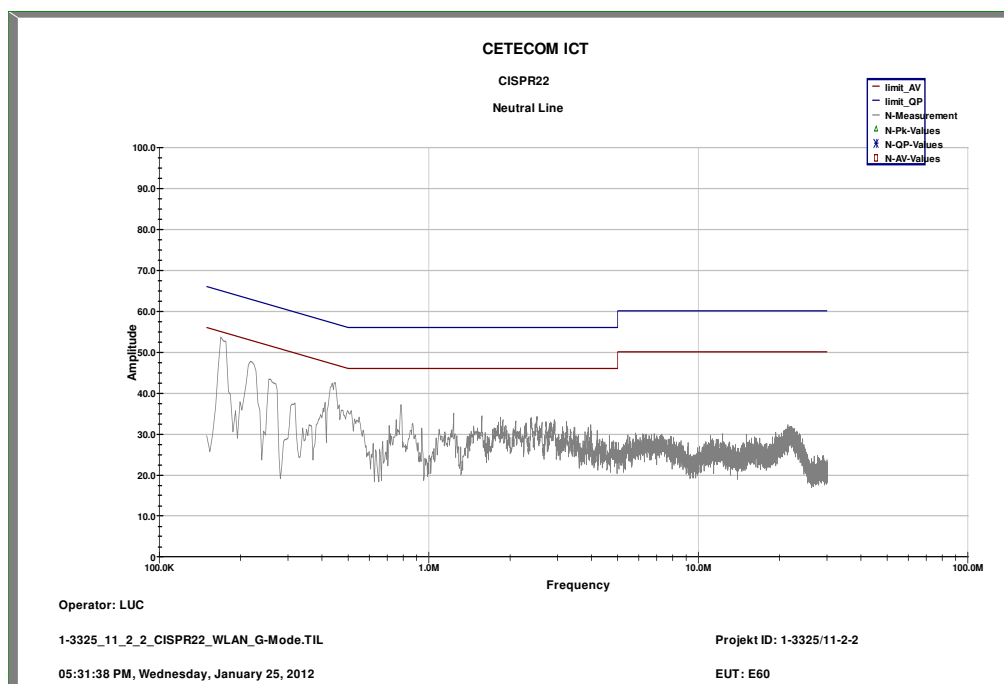

Plot 7: RX / Idle – mode, 9 kHz to 30 MHz, phase line

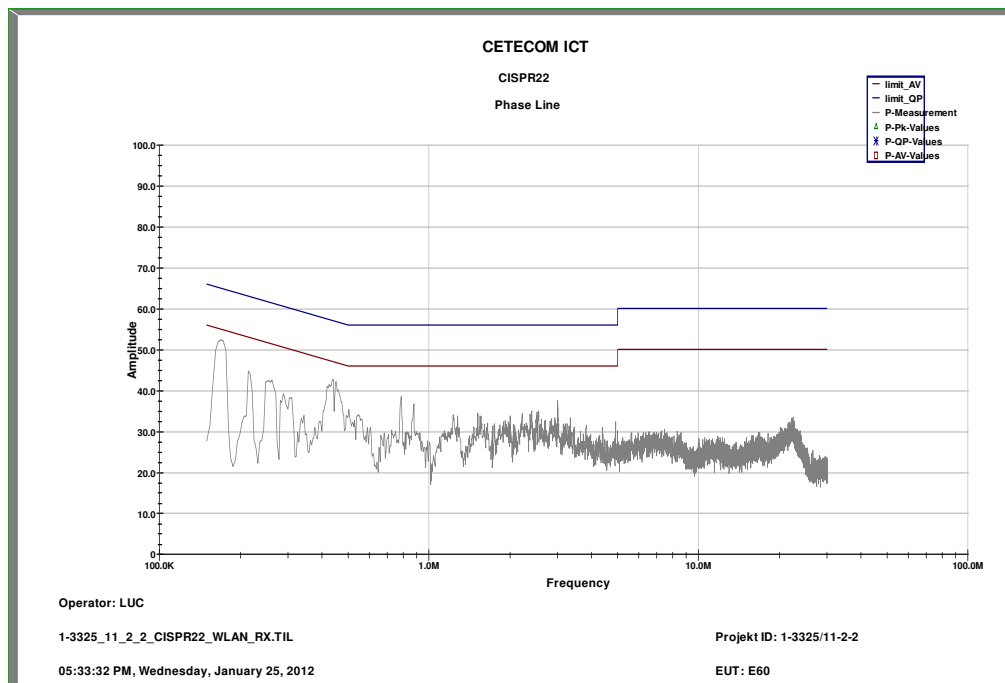

Plot 8: RX / Idle – mode, 9 kHz to 30 MHz, neutral line

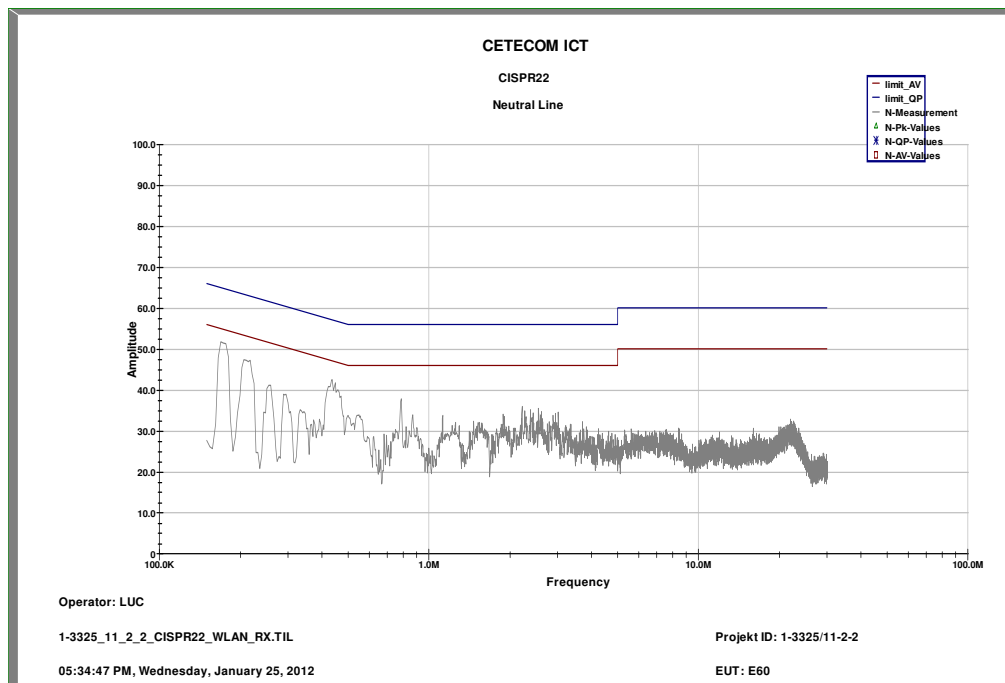

10 Test equipment and ancillaries used for tests

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, rf-generating and signalling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Labor/Item).

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	n. a.	Spectrum Analyzer 20 Hz - 50 GHz	FSU50	R&S	200012	300003443	ve	01.07.2010	01.07.2012
2	n. a.	Relais Matrix	PSU	R&S	890167/024	300001168	ne		
3	n. a.	Isolating Transformer	RT5A	Grundig	9242	300001263	ne		
4	n. a.	TILE-Software Emission	Quantum Change, Modell TILE-ICS/FULL	EMCO	none	300003451	ne		
5	n. a.	PSA Spectrum Analyzer 3 Hz - 26.5 GHz	E4440A	Agilent Technologies	MY48250080	300003812	k	08.09.2010	08.09.2012
6	n. a.	RF Filter Section 9kHz - 1GHz	N9039A	Agilent Technologies	MY48260003	300003825	vKI!	08.09.2010	08.09.2012
7	45	Switch-Unit	3488A	HP Meßtechnik	2719A14505	300000368	g		
8	50	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP Meßtechnik	2920A04466	300000580	k	06.01.2009	06.01.2011
9	n. a.	software	SPS_PHE 1.4f	Spitzberger & Spieß	B5981; 5D1081; B5979	3000000210	ne		
10	n. a.	EMI Test Receiver	ESCI 1166.5950.03	R&S	100083	300003312	k	05.01.2011	05.01.2013
11	n. a.	Analyzer-Reference-System (Harmonics and Flicker)	ARS 16/1	SPS	A3509 07/0 0205	300003314	k	01.06.2009	01.06.2011
12	n. a.	Amplifier	JS42-00502650-28-5A	MITEQ	1084532	300003379	ev		
13	n. a.	Antenna Tower	Model 2175	ETS-LINDGREN	64762	300003745	izw		
14	n. a.	Positioning Controller	Model 2090	ETS-LINDGREN	64672	300003746	izw		
15	n. a.	Turntable Interface-Box	Model 105637	ETS-LINDGREN	44583	300003747	izw		
16	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	295	300003787	k	01.04.2010	01.04.2012
17	n. a.	Spectrum-Analyzer	FSU26	R&S	200809	300003874	k	10.01.2011	10.01.2013
18	n. a.	Isolating Transformer	RT5A	Grundig	8041	300001626	g		
19	n. a.	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP Meßtechnik	2818A03450	300001040	Ve	08.01.2009	08.01.2012
20	n. a.	Coaxial Attenuator 30dB/500W	8325	Bird	1530	300001595	ev		
21	n. a.	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032	vKI!	05.03.2009	05.09.2011

22	n. a.	Active Loop Antenna	6502	EMCO	2210	300001015	ne		
23	n. a.	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996		23.03.2009	
24	Spec.A. 2_2e	System rack for EMI measurement solution	85900	HP I.V.	*	300000222	ne		
25	9	Artificial Mains 9 kHz to 30 MHz	ESH3-Z5	R&S	828576/020	300001210	Ve	06.01.2010	06.01.2012
26	n. a.	Relais Matrix	3488A	HP Meßtechnik	2719A15013	300001156	ne		
27	n. a.	Relais Matrix	PSU	R&S	890167/024	300001168	ne		
28	n. a.	Isolating Transformer	RT5A	Grundig	9242	300001263	ne		
29	n. a.	Three-Way Power Splitter, 50 Ohm	11850C	HP Meßtechnik		300000997	ne		
30	n. a.	Switch / Control Unit	3488A	HP	2605e08770	300001443	ne		
31	n. a.	Amplifier	js42-00502650-28-5a	Parzich GMBH	928979	300003143	ne		
32	n. a.	Band Reject filter	WRCG1855/1910-1835/1925-40/8SS	Wainwright	7	300003350	ev		
33	n. a.	Band Reject filter	WRCG2400/2483-2375/2505-50/10SS	Wainwright	11	300003351	ev		
34	n. a.	Highpass Filter	WHKX2.9/18G-12SS	Wainwright	1	300003492	ev		
35	n. a.	Highpass Filter	WHK1.1/15G-10SS	Wainwright	3	300003255	ev		
36	n. a.	Highpass Filter	WHKX7.0/18G-8SS	Wainwright	18	300003789	ne		
37	n. a.	MXG Microwave Analog Signal Generator	N5183A	Agilent Technologies	MY47420220	300003813	k	13.09.2010	13.09.2012
38	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	371	300003854	vkI!	17.12.2008	17.12.2011
39	A014	Std. Gain Horn Antenna 9.84-15.0 GHz	1724-20	Flann	89	300001957	ne		
40	A016	Std. Gain Horn Antenna 14.5-22.0 GHz	1924-20	Flann	33	300001963	ne		
41	A019	Std. Gain Horn Antenna 17.6-26.7 GHz	2024-20	Flann	156	300001968	ne		

Agenda: Kind of Calibration

k calibration / calibrated
 ne not required (k, ev, izw, zw not required)
 ev periodic self verification
 Ve long-term stability recognized
 vkI! Attention: extended calibration interval
 NK! Attention: not calibrated

EK limited calibration
 zw cyclical maintenance (external cyclical maintenance)
 izw internal cyclical maintenance
 g blocked for accredited testing
 *) next calibration ordered / currently in progress

11 Observations

No observations exceeding those reported with the single test cases have been made.

Annex A Photographs of the test setup

Photo documentation:

Photo 1:



Photo 2: (Chamber F)

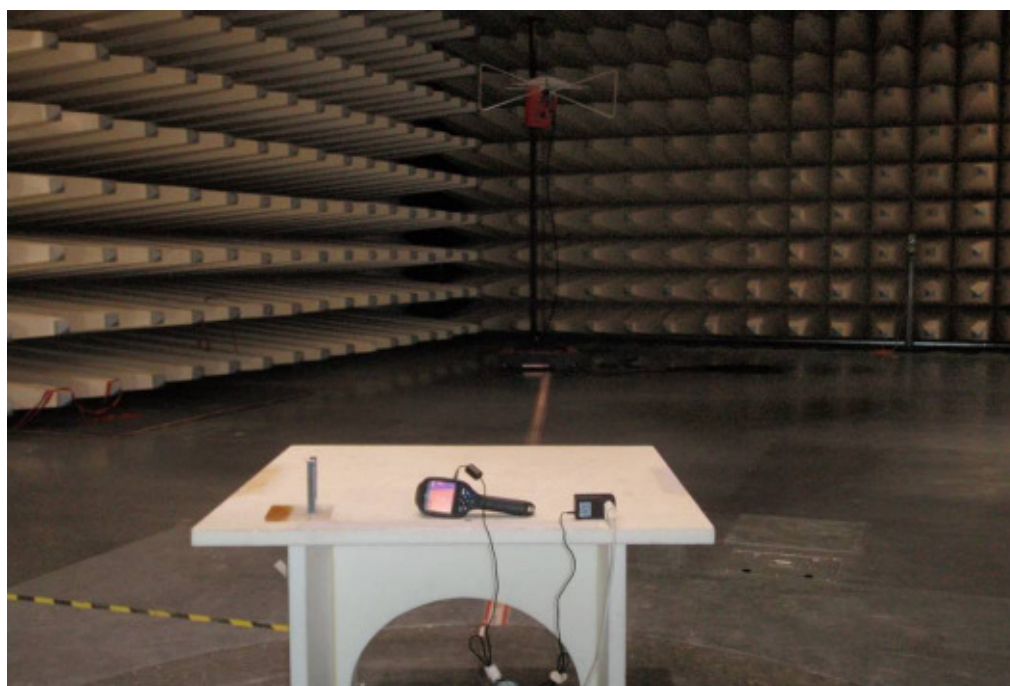


Photo 3: (Chamber F)



Photo 4: (Chamber F)



Annex B External photographs of the EUT

Photo documentation:

Photo 1:



Photo 2:



Photo 3:



Photo 4:



Photo 5:



Photo 6:



Photo 7:



Photo 8:



Photo 9:



Photo 10:



Annex C Internal photographs of the EUT

Photo documentation:

Photo 1:



Photo 2:



Photo 3:



Photo 4:



Photo 5:



Photo 6:



Photo 7:



Photo 8:



Photo 9:



Photo 10:

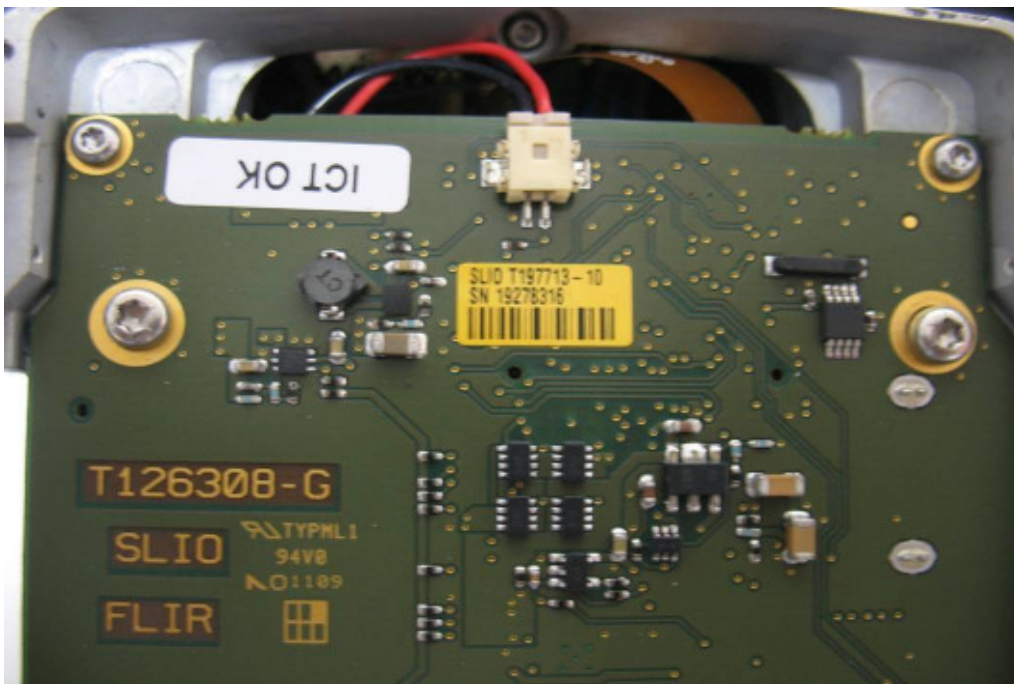


Photo 11:



Photo 12:

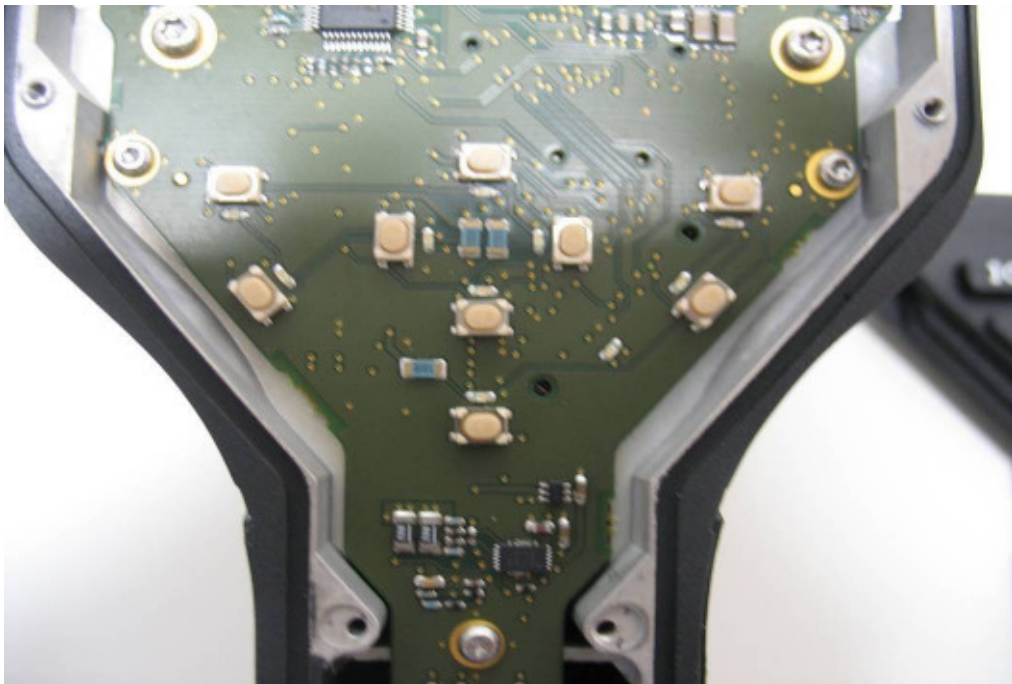


Photo 13:

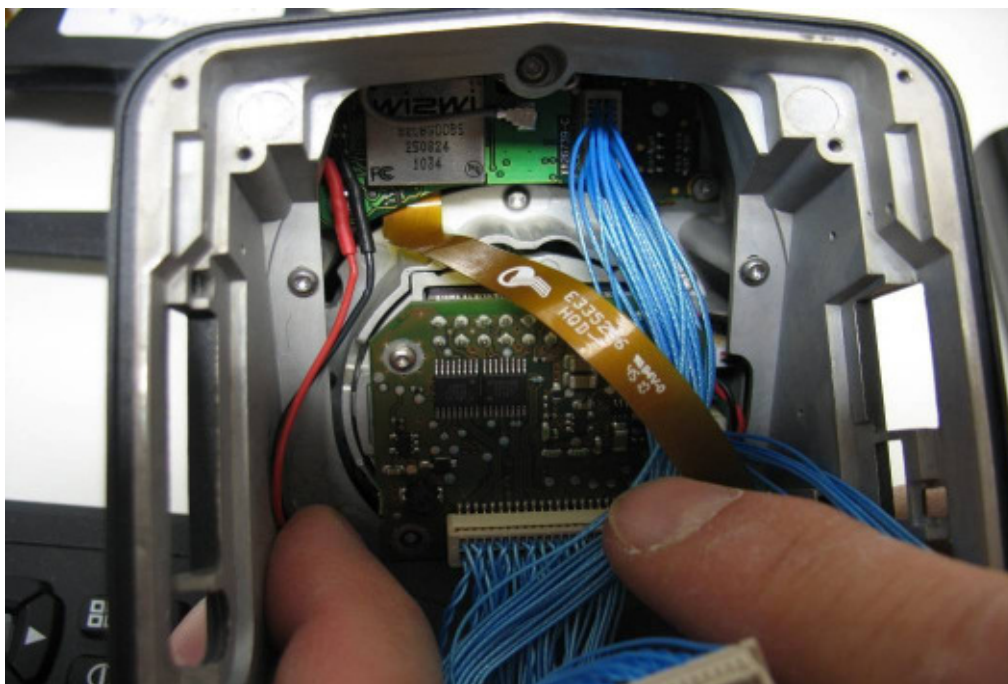


Photo 14:

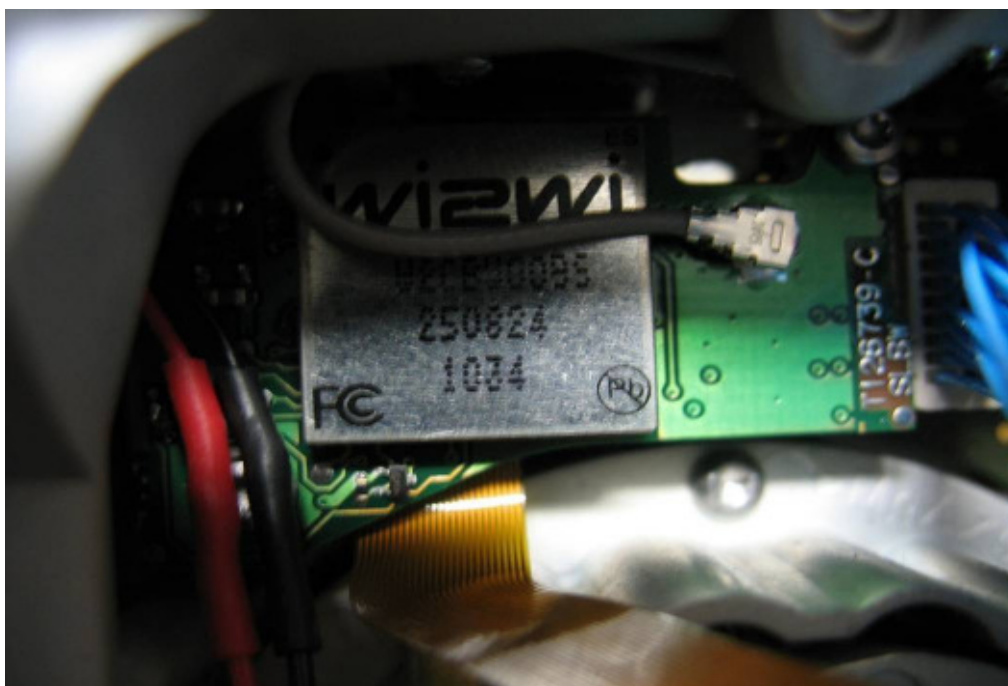


Photo 15:

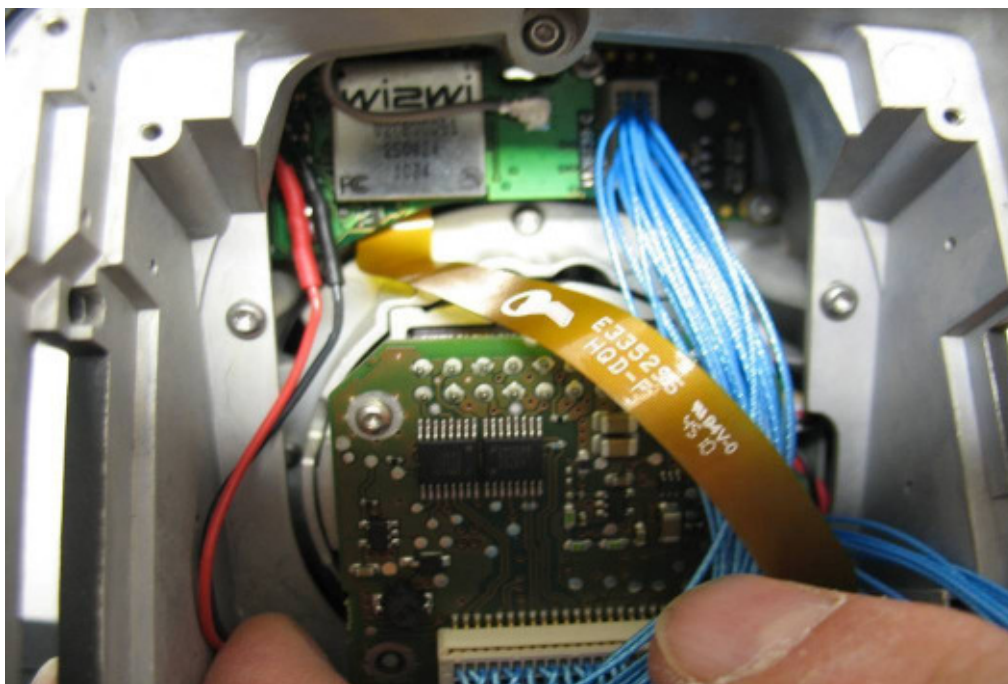


Photo 16:



Photo 17:



Photo 18:

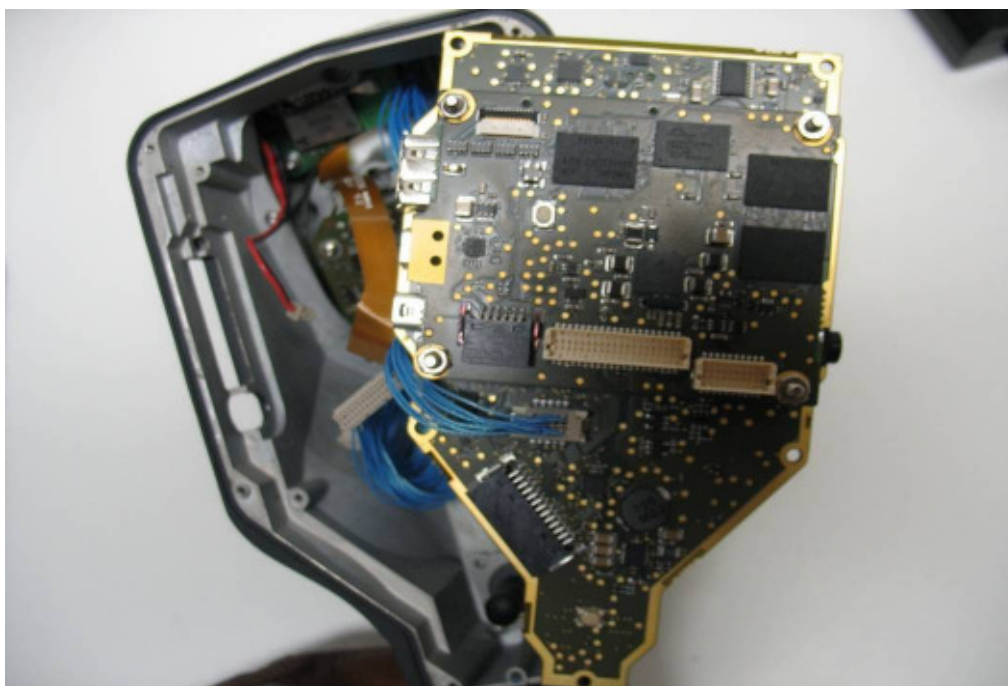


Photo 19:



Photo 20:

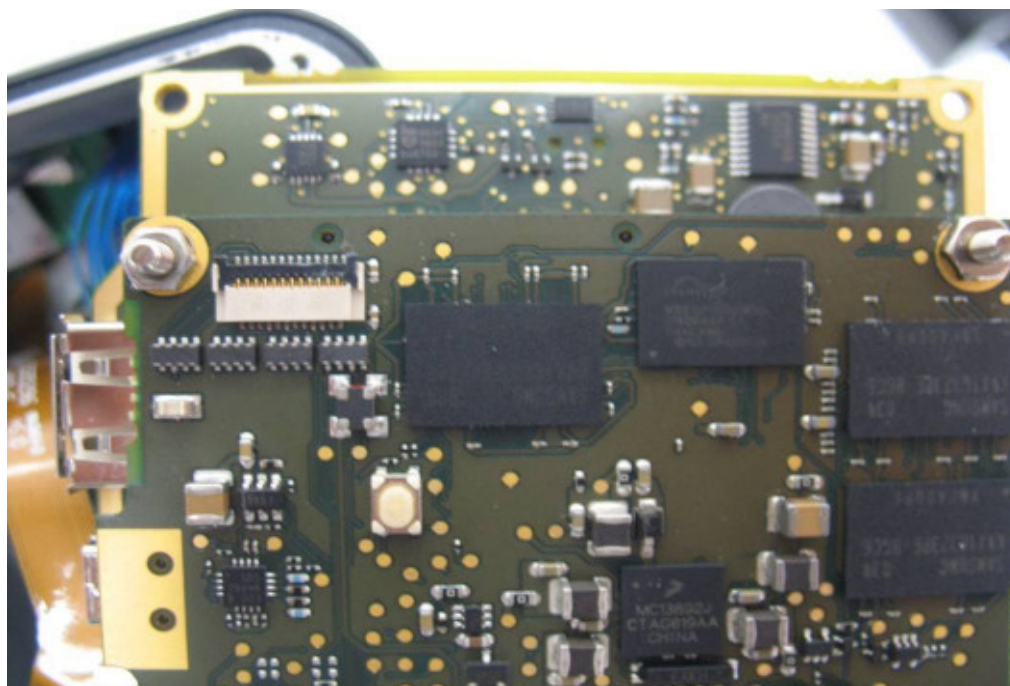


Photo 21:

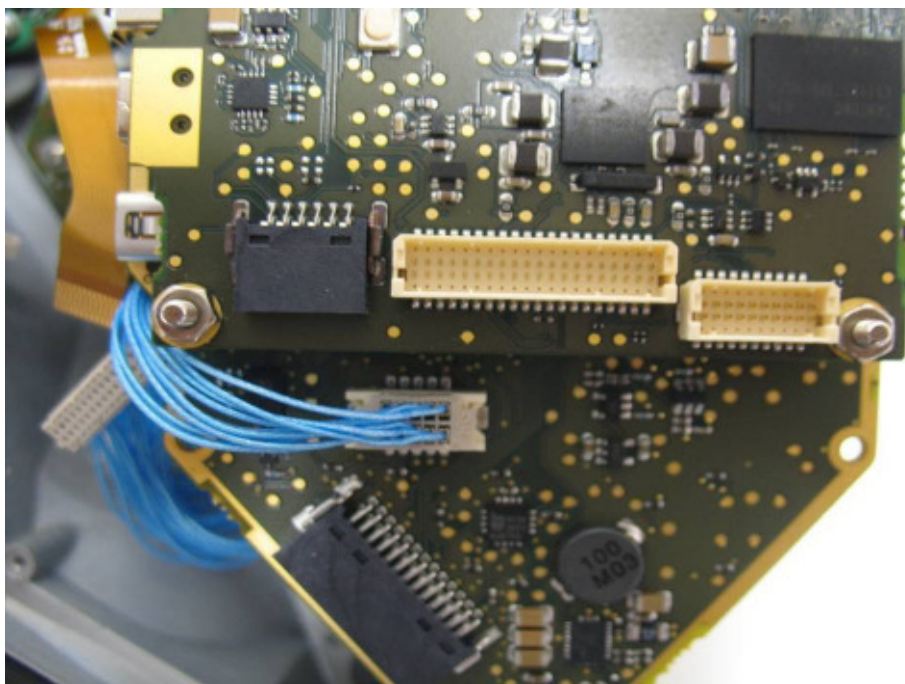


Photo 22:




Annex D Document history

Version	Applied changes	Date of release
1.0	Initial release	2012-02-23
-A	Merge with the radiated tests report	2012-02-21

Annex E Further information**Glossary**

AVG	-	Average
DUT	-	Device under test
EMC	-	Electromagnetic Compatibility
EN	-	European Standard
EUT	-	Equipment under test
ETSI	-	European Telecommunications Standard Institute
FCC	-	Federal Communication Commission
FCC ID	-	Company Identifier at FCC
HW	-	Hardware
IC	-	Industry Canada
Inv. No.	-	Inventory number
N/A	-	Not applicable
PP	-	Positive peak
QP	-	Quasi peak
S/N	-	Serial number
SW	-	Software

Front side of certificate



The current certificate including annex is published on our website (see link below) or may be received from CETECOM ICT Services on request.

2012-02-21