

TEST REPORT

Reference No...... : WTD24D03065711W001
FCC ID..... : ZLZ-RF60RF25
Applicant : Shenzhen Mindray BIO-Medical electronics Co.,LTD.
Address : Mindray Building, Keji 12th Road South,Hi-tech Ind, Shenzhen China
Manufacturer : Shenzhen Mindray BIO-Medical electronics Co.,LTD.
Address : Mindray Building, Keji 12th Road South,Hi-tech Ind, Shenzhen China
Product : Finished Remote Controls
Model(s)..... : RF60, RF25
Standards : FCC 47CFR Part 15 Subpart C Section 15.231
Date of Receipt sample : 2024-03-28
Date of Test : 2024-03-28 to 2024-04-11
Date of Issue : 2024-08-23
Test Result : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group Co., Ltd.

Address: No. 77, Houjie Section, Guantai Road, Houjie Town, Dongguan City, Guangdong, China

Tel: +86-769-2267 6998

Fax: +86-769-2267 6828

Compiled by:

Approved by:

Estel Qian

Estel Qian / Project Engineer



Deval Qin /Designated Reviewer

2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS.....	2
3 REVISION HISTORY.....	3
4 GENERAL INFORMATION.....	4
4.1 GENERAL DESCRIPTION OF E.U.T.....	4
4.2 DETAILS OF E.U.T.	4
4.3 TEST MODE	4
4.4 SUBCONTRACTED	4
4.5 ABNORMALITIES FROM STANDARD CONDITIONS	5
5 EQUIPMENT USED DURING TEST.....	6
5.1 EQUIPMENTS LIST	6
5.2 MEASUREMENT UNCERTAINTY	7
5.3 TEST EQUIPMENT CALIBRATION	7
5.4 TEST FACILITY	7
6 TEST SUMMARY.....	8
7 RADIATED SPURIOUS EMISSIONS	9
7.1 EUT OPERATION	9
7.2 TEST SETUP	10
7.3 SPECTRUM ANALYZER SETUP.....	11
7.4 TEST PROCEDURE	12
7.5 SUMMARY OF TEST RESULTS	12
8 PERIODIC OPERATION.....	15
9 EMISSION BANDWIDTH.....	18
9.1 TEST PROCEDURE	18
9.2 TEST RESULT	18
10 ANTENNA REQUIREMENT	19
11 RF EXPOSURE.....	19
12 PHOTOGRAPHS –TEST SETUP AND EUT	19

3 Revision History

Test Report No.	Date of Receipt Sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTD24D03065711W001	2024-03-28	2024-03-28 to 2024-04-11	2024-08-23	Original	-	Valid

4 General Information

4.1 General Description of E.U.T.

Product Name: Finished Remote Controls
Model No.: RF60, RF25
Model Description: RF60 and RF25 are only different in the appearance of the upper layer and the number of keys. The internal circuit boards, batteries, Wireless Module, and main control MCUs are the same.
Test Sample No.: RF25: 1-6/13
RF60: 1-3/13
Hardware Version: V2.0
Software Version: V2.0

4.2 Details of E.U.T.

Frequency Range: 434.0MHz, 1CH
Technology: LORA
The Lowest Oscillator: XTAL: 36MHz
Antenna installation: Spring Antenna
Antenna Gain: 1.86dBi

Note:

#: The antenna gain is provided by the applicant, and the applicant should be responsible for its authenticity, WALTEK lab has not verified the authenticity of its information.

Power supply: DC 3V from AA battery 1.5V *2

4.3 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Channel
Transmitting	434MHz

4.4 Subcontracted

Whether parts of tests for the product have been subcontracted to other labs:

☐ Yes ☒ No

If Yes, list the related test items and lab information:

Test Lab: N/A

Lab address: N/A

Test items: N/A

4.5 Abnormalities from Standard Conditions

None.

5 Equipment Used during Test

5.1 Equipments List

3m Semi-anechoic Chamber for Radiation Emissions 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP30	100091	2023-04-24	2024-04-23
2	Amplifier	Agilent	8447D	2944A10178	2023-07-27	2024-07-26
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2023-08-07	2024-08-06
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2023-04-24	2024-04-23
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2024-01-23	2025-01-22
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2023-02-02	2024-02-01
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2023-08-08	2024-08-07
8	Coaxial Cable (above 1GHz)	ZT26-NJ-NJ-8M/FA	1GHz-18GHz	NA	2023-04-24	2024-04-23
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2023-04-24	2024-04-23
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2023-11-04	2024-11-03
3	Active Loop Antenna	Com-Power Corp.	AL-130R	10160007	2023-05-07	2024-05-06
4	Amplifier	ANRITSU	MH648A	M43381	2023-04-24	2024-04-23
5	Cable	HUBER+SUHNER	CBL2	525178	2023-04-24	2024-04-23
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	Spectrum Analyzer	Agilent	N9020A	MY49100060	2023-07-27	2024-07-26
2	Spectrum Analyzer	R&S	FSP30	100091	2023-04-24	2024-04-23
3	Humidity Chamber	GF	GTH-225-40-1P	IAA061213	2023-07-27	2024-07-26
4	EXA Signal Analyzer	Keysight	N9010A	MY50520207	2023-04-24	2024-04-23

Test Software:

Test Item	Software name	Software version
Radiated Emission(3m)	EZ-EMC	EZ-EMC(RA-03A1-1)

5.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (30M~1000MHz)
	± 5.47 dB (1000M~25000MHz)
Confidence interval:95%. Confidence factor: k=2	

5.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R. China.

5.4 Test Facility

The test facility has a test site registered with the following organizations:

ISED CAB identifier: CN0013. Test Firm Registration No.: 7760A.

Waltek Testing Group Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration number 7760A, October 15, 2016.

FCC Designation No.: CN1201. Test Firm Registration No.: 523476.

Waltek Testing Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration number 523476, September 10, 2019.

6 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	15.207	N/A*
Radiated Spurious Emissions	15.205(a) 15.209 15.231(a)	Pass
Periodic Operation	15.231(a)	Pass
Emission Bandwidth	15.231(c)	Pass
Antenna Requirement	15.203	Pass
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	Pass
Note: Pass=Compliance; NC=Not Compliance; NT=Not Tested; N/A=Not Applicable *: The EUT is only powered by battery, no need to evaluate AC Power Conducted Emission.		

7 Radiated Spurious Emissions

Test Requirement: FCC Part15 §15.231(a), (b)

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Fundamental Frequency (MHz)	Field Strength of Fundamental (uV/m)	Field Strength of Fundamental (dBuV/m)	Field Strength of Spurious Emission (uV/m)	Field Strength of Spurious Emission (dBuV/m)
44.66-40.70	2250	67	225	47
70-130	1250	62	125	42
130-174	1250 to 3750*	62 to 71.48*	125 to 375*	42 to 51.48*
174-260	3750	71.48	375	51.48
260-470	3750 to 12500*	71.48 to 81.94*	375 to 1250*	51.48 to 61.94*
Above 470	12500	81.94	1250	61.94
* linear interpolations				

7.1 EUT Operation

Operating Environment:

Temperature: 21.5 °C

Humidity: 53.4 % RH

Atmospheric Pressure: 101.3kPa

Test Voltage: DC 3V by Battery


EUT Operation:

The test was performed in transmitting mode, the test data were shown in the report.


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

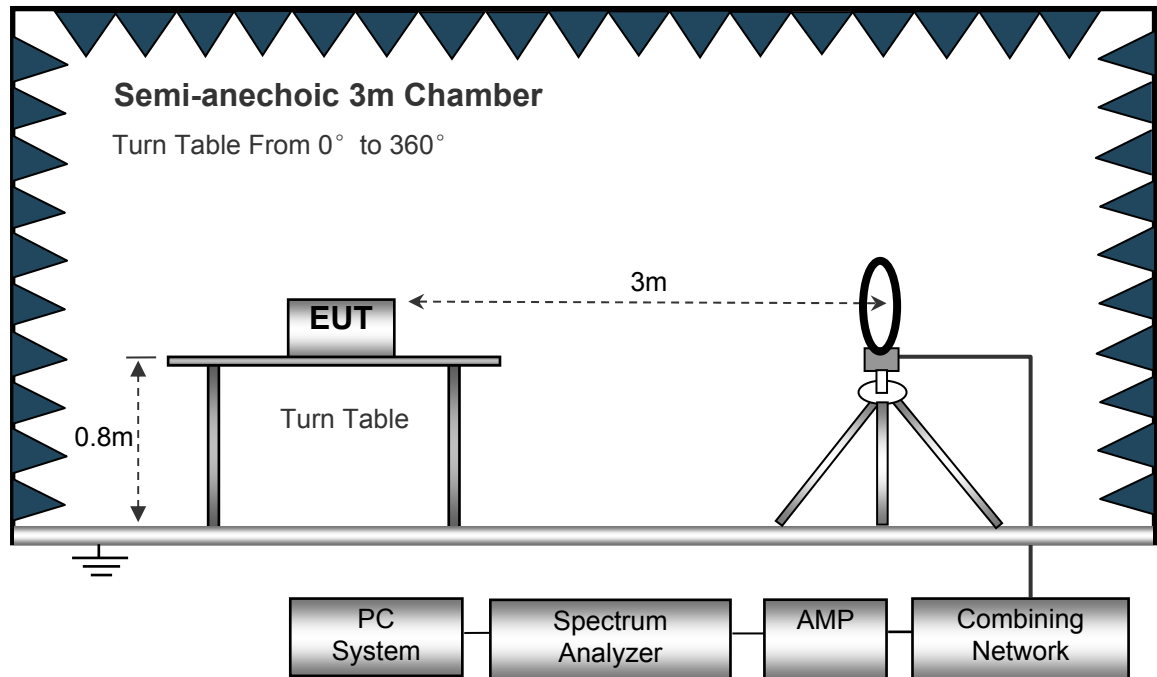

The test setup for emission measurement from 30 MHz to 1 GHz.

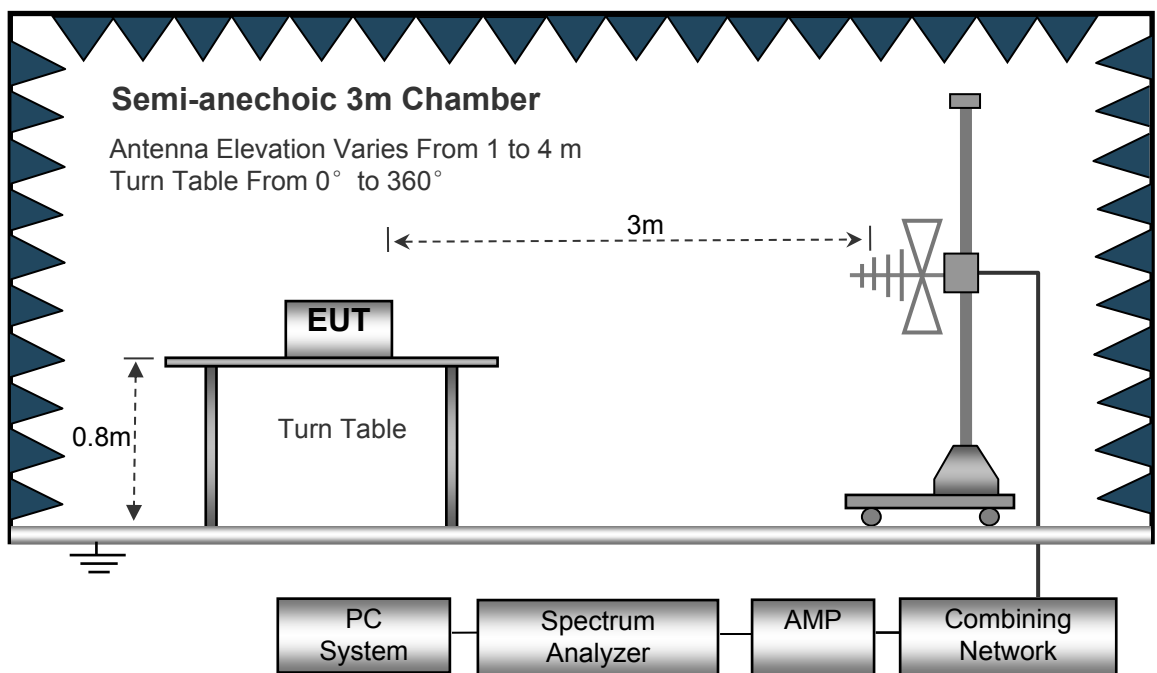

The test setup for emission measurement above 1 GHz.

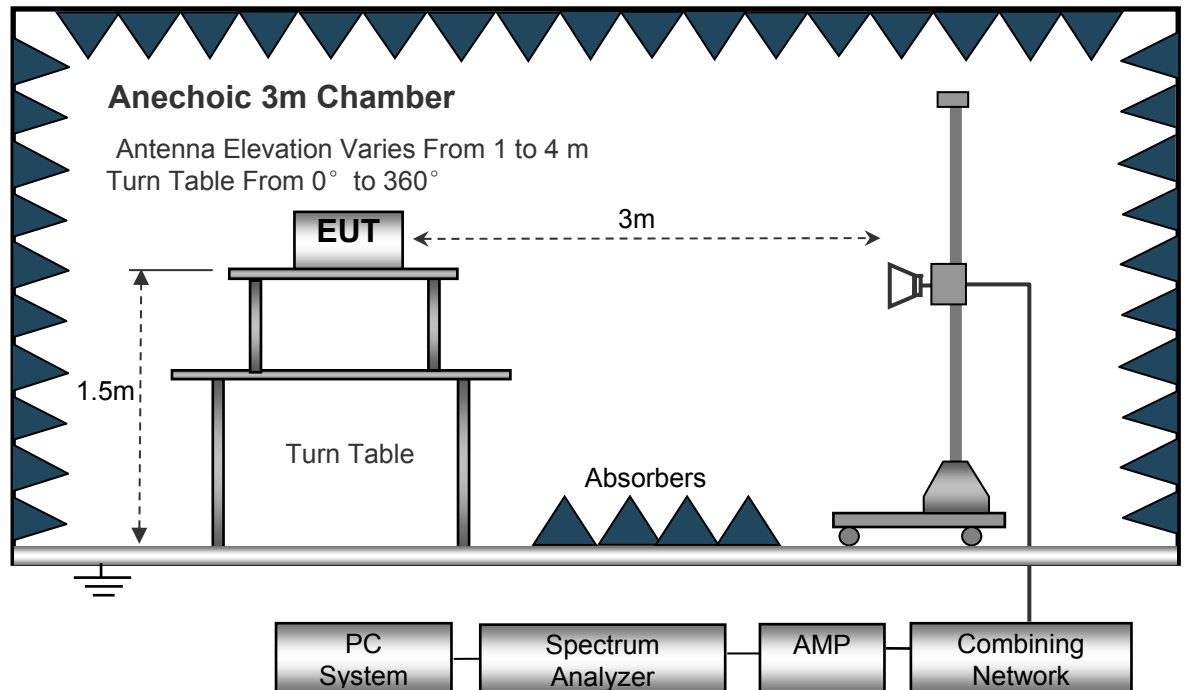

7.3 Spectrum Analyzer Setup

Below 30MHz

Sweep SpeedAuto
 IF Bandwidth.....10kHz
 Video Bandwidth.....10kHz
 Resolution Bandwidth.....10kHz

30MHz ~ 1GHz

Sweep SpeedAuto
 DetectorPK
 Resolution Bandwidth.....100kHz
 Video Bandwidth.....300kHz

Above 1GHz

Sweep SpeedAuto
 DetectorPK
 Resolution Bandwidth.....1MHz
 Video Bandwidth.....3MHz

7.4 Test Procedure

1. The EUT is placed on a turntable. For below 1GHz, the EUT is 0.8m above ground plane; For above 1GHz, the EUT is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X, Y, Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

7.5 Summary of Test Results

Test Frequency: 9 kHz~30 MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency: 30MHz ~ 5GHz**Model: RF25**

Frequency	Receiver Reading	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.231/15.209/205	
	(PK)		Height	Polar		(PK)	Limit	Margin
(MHz)	(dBμV)	Degree	(m)	(H/V)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)
434	72.93	51	2.0	H	-0.94	71.99	100.8	-28.81
434	89.55	5	2.2	V	-0.94	88.61	100.8	-12.19
1736	80.15	188	2.2	H	-11.09	69.06	80.8	-11.74
1736	81.22	87	1.6	V	-11.09	70.13	80.8	-10.67
2604	63.68	68	1.2	H	-8.2	55.48	80.8	-25.32
2604	66.33	211	1.6	V	-8.2	58.13	80.8	-22.67

Note: the measurements were more than 20 dB below the limit and not reported.**AV = Peak +20Log₁₀(duty cycle) =PK+(-11.5)** (refer to section 8 for more detail)

Frequency	PK	RX Antenna	Duty cycle Factor	Calculated AV	FCC Part 15.231/209/205	
		Polar			Limit	Margin
(MHz)	(dBμV/m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
434	71.99	H	-11.5	60.49	80.8	-20.31
434	88.61	V	-11.5	77.11	80.8	-3.69
1736	69.06	H	-11.5	57.56	60.8	-3.24
1736	70.13	V	-11.5	58.63	60.8	-2.17
2604	55.48	H	-11.5	43.98	60.8	-16.82
2604	58.13	V	-11.5	46.63	60.8	-14.17

Model: RF60

Frequency	Receiver Reading	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.231/15.209/205	
	(PK)		Height	Polar		(PK)	Limit	Margin
(MHz)	(dBμV)	Degree	(m)	(H/V)	(dB/m)	(dBμV/m)	(dBμV/m)	(dB)
434	84.96	274	1.6	H	-0.94	84.02	100.8	-16.78
434	90.92	63	1.5	V	-0.94	89.98	100.8	-10.82
868	52.35	336	1.5	H	7.29	59.64	80.8	-21.16
868	55.59	291	1.0	V	7.29	62.88	80.8	-17.92
1736	75.04	184	2.0	H	-11.09	63.95	80.8	-16.85
1736	77.92	270	2.2	V	-11.09	66.83	80.8	-13.97
2604	64.36	192	2.3	H	-8.2	56.16	80.8	-24.64
2604	66.50	166	2.2	V	-8.2	58.3	80.8	-22.50

Note: the measurements were more than 20 dB below the limit and not reported.

AV = Peak +20Log₁₀(duty cycle) =PK+(-11.5) (refer to section 8 for more detail)

Frequency	PK	RX Antenna	Duty cycle Factor	Calculated	FCC Part 15.231/209/205	
		Polar		AV	Limit	Margin
(MHz)	(dBμV/m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
434	84.02	H	-11.5	72.52	80.8	-8.28
434	89.98	V	-11.5	78.48	80.8	-2.32
868	59.64	H	-11.5	48.14	60.8	-12.66
868	62.88	V	-11.5	51.38	60.8	-9.42
1736	63.95	H	-11.5	52.45	60.8	-8.35
1736	66.83	V	-11.5	55.33	60.8	-5.47
2604	56.16	H	-11.5	44.66	60.8	-16.14
2604	58.3	V	-11.5	46.8	60.8	-14.00

8 Periodic Operation

The duty cycle was determined by the following equation:

To calculate the actual field intensity, the duty cycle correction factor in decibel is needed for later use and can be obtained from following conversion

Duty Cycle(%)=Total On interval in a complete pulse train/ Length of a complete pulse train * %

Duty Cycle Correction Factor(dB)=20 * Log₁₀(Duty Cycle (%)/100)

Total transmission time(ms)	1.09*24+0.08*5=26.56
Length of a complete transmission period(ms)	100
Duty Cycle (%)	26.56
Duty Cycle Correction Factor(dB)	-11.5

Refer to the duty cycle plot (as below), this device meets the FCC requirement.

Length of a complete pulse train:


Remark:

According to FCC part15.35(c) required that a complete pulse train is more than 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.


Refer to the duty cycle plot (as below)

Test Plot


Period-300ms

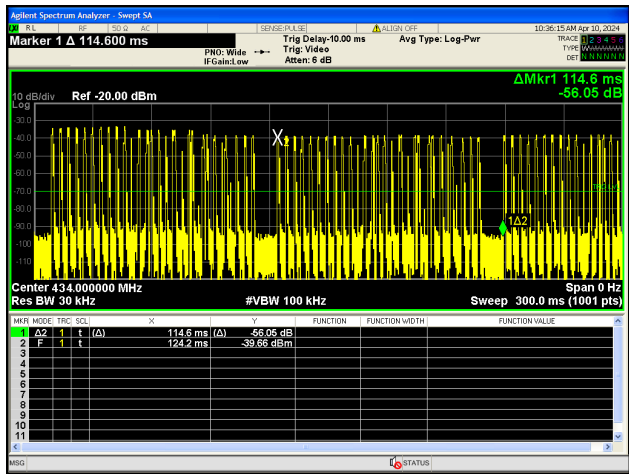

Period-100ms

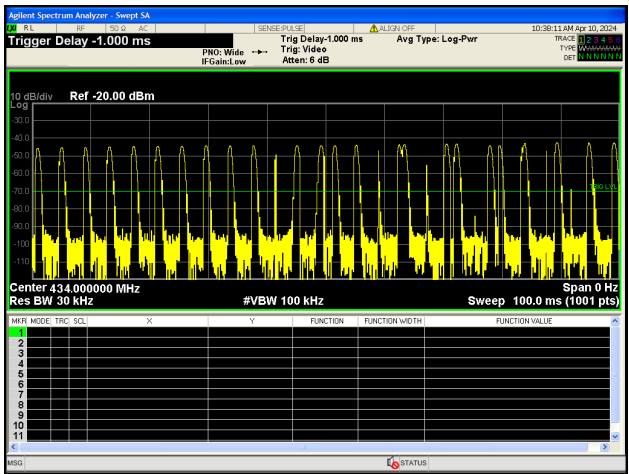

Pulse T_{on}

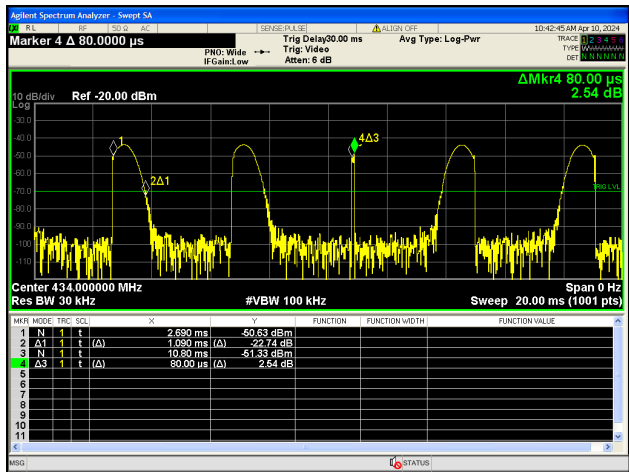

Pulse T_{on}


According to FCC Part15.231(a)

- (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.
- (2)A transmitter activated automatically shall cease transmission within 5 seconds after activation.

Test result

Limit (s)	Result
<5.0	Compliance

Test Plot

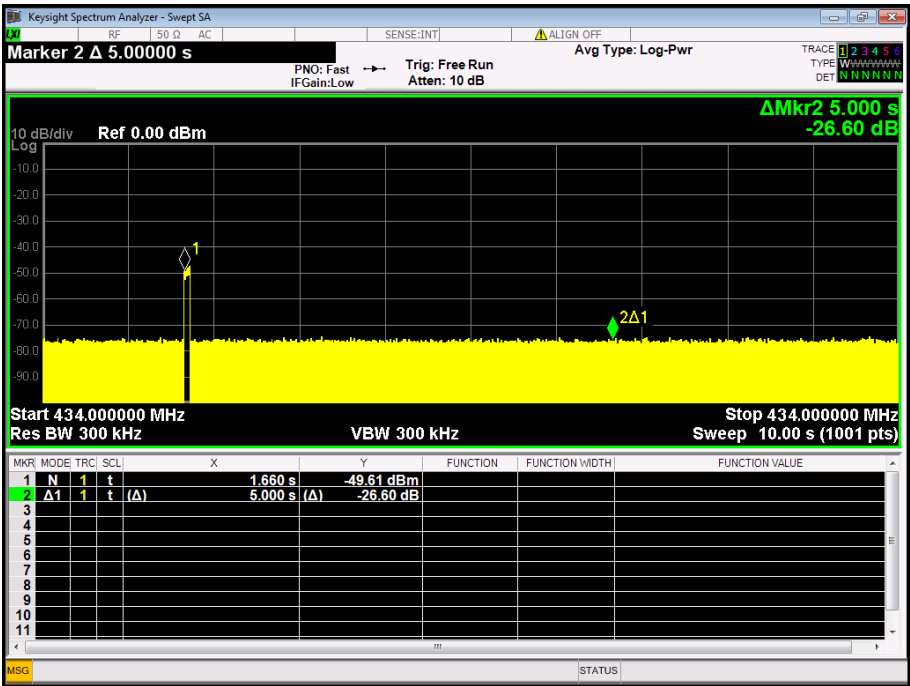

9 Emission Bandwidth

Test Requirement: FCC Part15.231(c)

Test Method: FCC Part15.231(c)

Limit The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency.


9.1 Test Procedure

1. The transmitter output (antenna port) was connected to the spectrum analyzer. EUT and its simulators are placed on a table, let EUT working in test mode, then test it.
2. The bandwidth of the fundamental frequency was measure by spectrum analyser with:
RBW=1% to 5% of OBW, VBW=3 times of RBW.
The 20 dB bandwidth and 99% bandwidth were recorded.

9.2 Test Result

Frequency (MHz)	20dB Bandwidth Emission(kHz)	99% Bandwidth Emission(kHz)	Limit (kHz)	Result
434	266.4	247.76	1084.5	Compliance

Test Plot

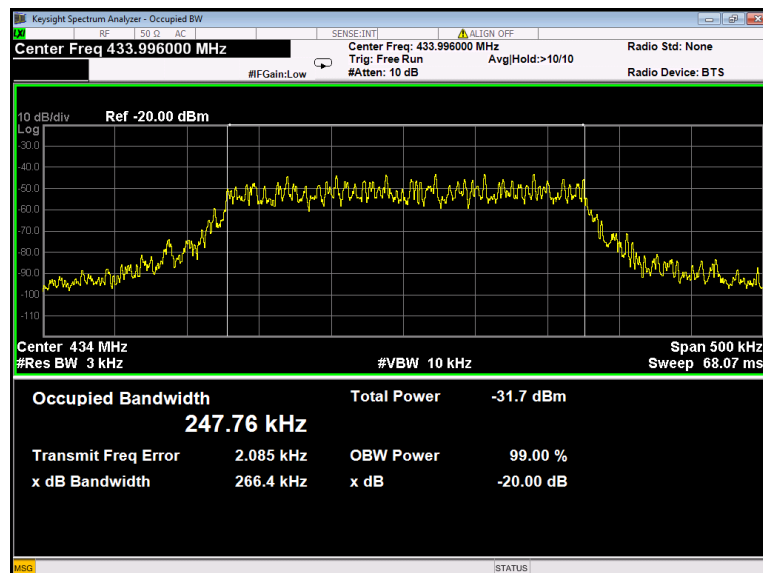

10 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna fulfil the requirement of this section.

Note: Please refer to EUT photos for more details.

11 RF Exposure

Remark: Please refer to MPE test report: WTD24D03065711W002

12 Photographs –Test Setup and EUT

Note: Please refer to appendix: Appendix-RF60, RF25-Photos

=====End of Report=====