

FCC CFR47 PART 15 SUBPART C
CERTIFICATION
TEST REPORT

FOR

Oura Company Limited

Wireless Mouse

Model No.: M01

Prepared for : Oura Company Limited
Address : Room 2110, International Mayor communication Centre,
Shennan Road, Nanshan District, Shenzhen, China


Prepared by : SHENZHEN LCS CERTIFICATION SERVICES INC.
Address : Xingyuan Industrial Park, Tongda Road, Bao'an Blvd,
Bao'an District, Shenzhen, Guangdong, China

Report Number : LCS1105250798F
Date of Test : May 25, 2011 – June 01, 2011
Date of Report : June 01, 2011

TABLE OF CONTENTS

| Test Report Description | Page |
|---|-----------|
| 1. SUMMARY OF STANDARDS AND RESULTS | 3 |
| 2. GENERAL INFORMATION..... | 4 |
| 2.1 Description of Device (EUT)..... | 4 |
| 2.2 Test Facility | 4 |
| 2.3 Measurement Uncertainty..... | 4 |
| 3. TEST METHODOLOGY | 5 |
| 3.1 EUT Configuration | 5 |
| 3.2 EUT Exercise | 5 |
| 3.3 General Test Procedures | 5 |
| 3.4 Description Of Test Modes..... | 5 |
| 4. CONNECTION DIAGRAM OF TEST SYSTEM..... | 6 |
| 5. FCC PART 15.247 REQUIREMENTS..... | 7 |
| 5.1 Peak Power | 7 |
| 5.2 Band Edges Measurement..... | 8 |
| 5.3 Frequency Separation | 12 |
| 5.4 Number Of Hopping Frequency | 16 |
| 5.5 Time Of Occupancy (Dwell Time) | 18 |
| 5.6 Spurious Emissions | 21 |
| 6. RADIATED EMISSION MEASUREMENT | 25 |
| 6.1 Test Equipment | 25 |
| 6.2 Block Diagram of Test Setup..... | 25 |
| 6.3 Radiated Emission Limit..... | 26 |
| 6.4 Test Results..... | 26 |
| 7. POWER LINE CONDUCTED EMISSIONS..... | 29 |
| 7.1 Test Equipment | 29 |
| 7.2 Block Diagram of Test Setup..... | 29 |
| 7.3 Conducted Emission Limit | 29 |
| 7.4 Test Results..... | 29 |
| 8. ANTENNA REQUIREMENT | 31 |
| 8.1 Standard Applicable..... | 31 |
| 8.2 Antenna Connected Construction | 31 |
| 9. MANUFACTURER/ APPROVAL HOLDER DECLARATION | 32 |

1. SUMMARY OF STANDARDS AND RESULTS

| | |
|--------------|--|
| Applicant | Oura Company Limited Room 2110, International Mayor communication Centre, Shennan Road, Nanshan District, Shenzhen, China |
| Manufacturer | Oura Company Limited Room 2110, International Mayor communication Centre, Shennan Road, Nanshan District, Shenzhen, China |
| EUT | Wireless Mouse |
| Trade Mark |  |
| Model No. | M01 |
| Serial No. | N/A |
| Power Supply | DC 3V |
| Date of Test | May 25, 2011 – June 01, 2011 |

| APPLICABLE STANDARDS | |
|--------------------------------------|-------------------------|
| STANDARD | TEST RESULT |
| FCC 47 CFR Part 15 Subpart C(15.247) | No non-compliance noted |

The measurement results are contained in this test report and Shenzhen LCS Compliance Testing Laboratory Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of SHENZHEN LCS CERTIFICATION SERVICES INC.

Compiled by:



Bobo Li/ File administrators

Supervised by:



Vito Cao/ Technique principal

Approved by:



Gavin Liang/ Manager

2. GENERAL INFORMATION

2.1 Description of Device (EUT)

| | |
|----------------------|-----------------|
| EUT | Wireless Mouse |
| Model Number | M01 |
| Power Supply | DC 3V |
| Frequency Range | 2402 ~ 2480 MHz |
| Transmit Power | 1.92dBm |
| Modulation Technique | FHSS |
| Transmit Data Rate | GFSK(1Mbps) |
| Number of Channels | 79 Channels |
| Antenna Gain | 1.5 dBi |

2.2 Test Facility

EMC Lab. : **CNAS-Lab Code: L4595**

SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD. has been assessed and proved to be in compliance with CNAS-CL01: 2006 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

FCC-Registration No.: 752021

Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration No. August 20, 2010.

Name of Firm : **SHENZHEN LCS CERTIFICATION SERVICES INC**

Site Location : Xingyuan Industrial Park, Tongda Road, Bao'an Blvd, Bao'an District, Shenzhen, Guangdong, China

2.3 Measurement Uncertainty

| | |
|----------------------------------|----------------|
| Radiation Uncertainty (30M~1GHz) | : Ur = ±4.26dB |
| Radiation Uncertainty (1G~3GHz) | : Ur = ±2.66dB |
| Radiation Uncertainty (3G~18GHz) | : Ur = ±2.83dB |
| Conduction Uncertainty | : Uc = ±2.61dB |

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

3.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 General Test Procedures

3.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

3.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4

3.4 Description Of Test Modes

The EUT has been tested under operating condition.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only.

Then, the worst case is GFSK(1M) Channel Low (2402MHz), Mid (2441MHz) and High (2480MHz), these were chosen for full testing.

Note: After the preliminary san GFSK. we found the modulation at GFSK producing the highest emission level, so evaluated we chosen the above modes (worst case) as a representative.

4. CONNECTION DIAGRAM OF TEST SYSTEM



(EUT: Wireless Mouse)


5. FCC PART 15.247 REQUIREMENTS

5.1 Peak Power

5.1.1 Test Equipment

| Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|-------------------|--------------|-------------|------------|---------------|---------------|
| Spectrum Analyzer | Agilent | E4407B | MY41440292 | June 29, 2010 | 1 Year |
| RF Cable | Hubersuhne | Sucoflex104 | FP2RX2 | June 29, 2010 | 1 Year |
| Power Sensor | Agilent | E9327A | US40441788 | June 29, 2010 | 1 Year |
| Power Meter | Agilent | E4416A | QB41292714 | June 29, 2010 | 1 Year |

5.1.2 Block Diagram of Test Setup

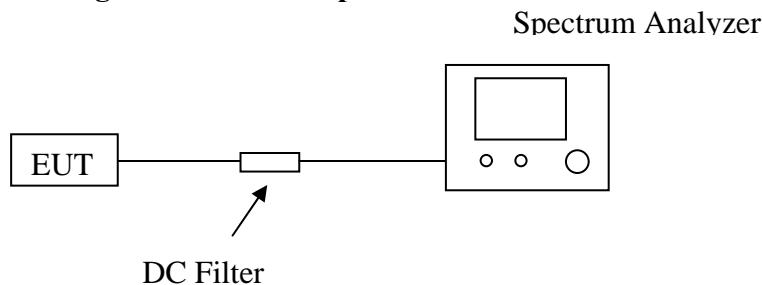

5.1.3 Limit

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.

5.1.4 Test Procedure

The transmitter output is connected to the Power Meter or spectrum analyzer.

5.1.5 Test Results

5.1.6

| Channel | Frequency (MHz) | Output Power (dBm) | Output Power (W) | Limit (W) | Result |
|---------|-----------------|--------------------|------------------|-----------|--------|
| Low | 2402 | 1.43 | 0.00139 | 1 | Pass |
| Mid | 2441 | 1.92 | 0.00156 | 1 | Pass |
| High | 2480 | 1.54 | 0.00143 | 1 | Pass |

5.2 Band Edges Measurement


5.2.1 Limit

According to §15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

5.2.2 Test Equipment

| Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|-------------------|---------------|-----------|------------|---------------|---------------|
| Spectrum Analyzer | Anritsu | MS2661C | 6200140915 | June 29, 2010 | 1 Year |
| Test Receiver | Rohde&Schwarz | ESCS30 | 828985/018 | June 29, 2010 | 1 Year |
| Antenna | Schwarzbeck | VULB9163 | 142 | June 29, 2010 | 1 Year |
| Horn-antenna | Schwarzbeck | BBHA9120D | D:266 | June 29, 2010 | 1 Year |

5.2.3 Block Diagram of Test Setup

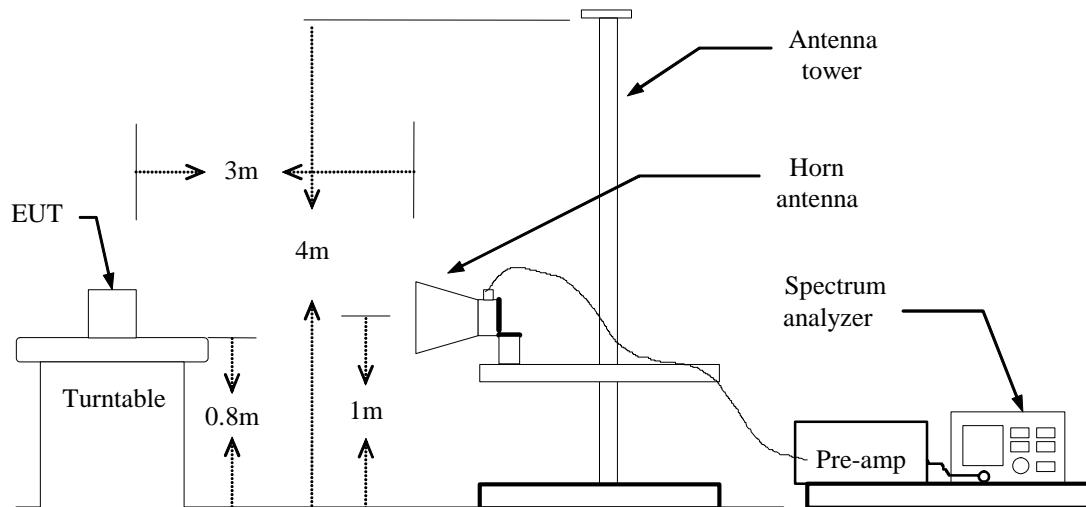

5.2.4 Test Procedure

The EUT is placed on a turntable, which is 0.8m above the ground plane. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:

Peak: RBW=VBW=1MHz / Sweep=AUTO

Repeat the procedures until the peak versus polarization are measured.

5.2.5 Test Results

CH Low



| Frequency (MHz) | Ant. Pol H/V | PK Value (dBuV) | Ave Value (dBuV) | PK Limit (dBuV) | Ave Limit (dBuV) | PK Margin (dB) | Ave Margin (dB) |
|-----------------|--------------|-----------------|------------------|-----------------|------------------|----------------|-----------------|
| 2390.00 | V | 43.19 | 32.30 | 74.00 | 54.00 | 30.81 | 21.70 |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| 2390.00 | H | 43.22 | 32.02 | 74.00 | 54.00 | 30.78 | 21.98 |
| | | | | | | | |
| | | | | | | | |

CH High

| Frequency (MHz) | Ant. Pol H/V | PK Value (dBuV) | Ave Value (dBuV) | PK Limit (dBuV) | Ave Limit (dBuV) | PK Margin (dB) | Ave Margin (dB) |
|-----------------|--------------|-----------------|------------------|-----------------|------------------|----------------|-----------------|
| 2483.50 | V | 42.38 | 32.75 | 74.00 | 54.00 | 31.62 | 21.25 |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| 2483.50 | H | 43.15 | 32.38 | 74.00 | 54.00 | 30.85 | 21.62 |
| | | | | | | | |
| | | | | | | | |


* The test data graph please refer to the following page.

Note : The attenuate 20 below fundamental level is less then FCC 15.209 limit, the attenuate 20 below fundamental level is marked in the test data graph.

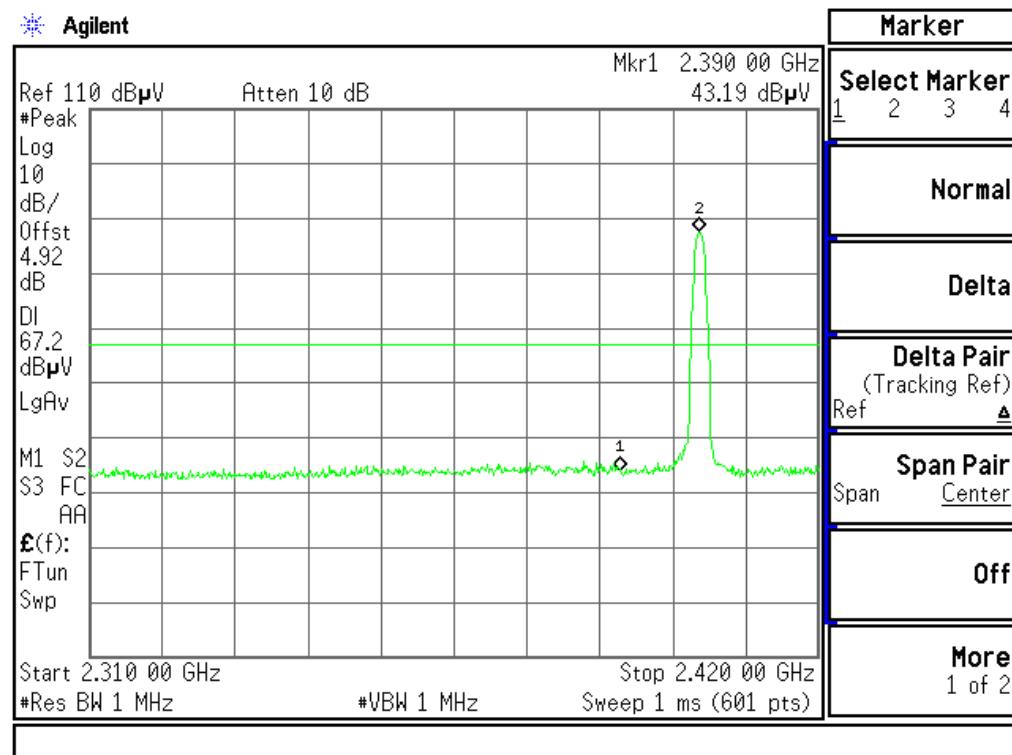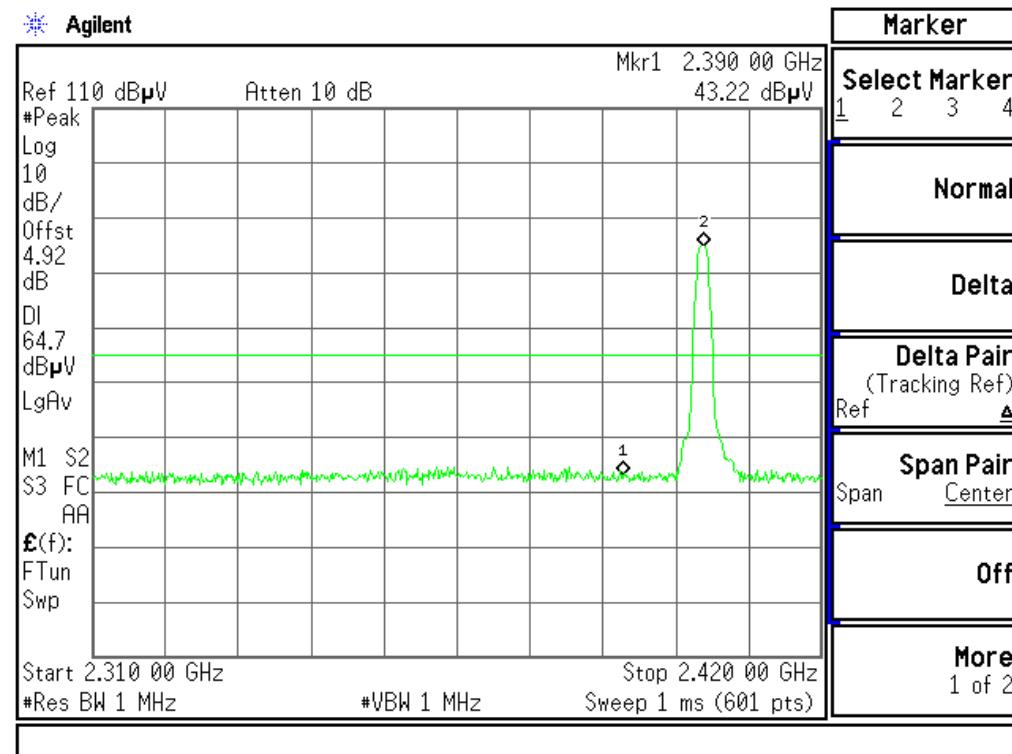Band Edges (CH Low)**Detector mode: Peak****Polarity: Vertical****Detector mode: Peak****Polarity: Horizontal****Band Edges (CH High)**


Detector mode: Peak

Polarity: Vertical

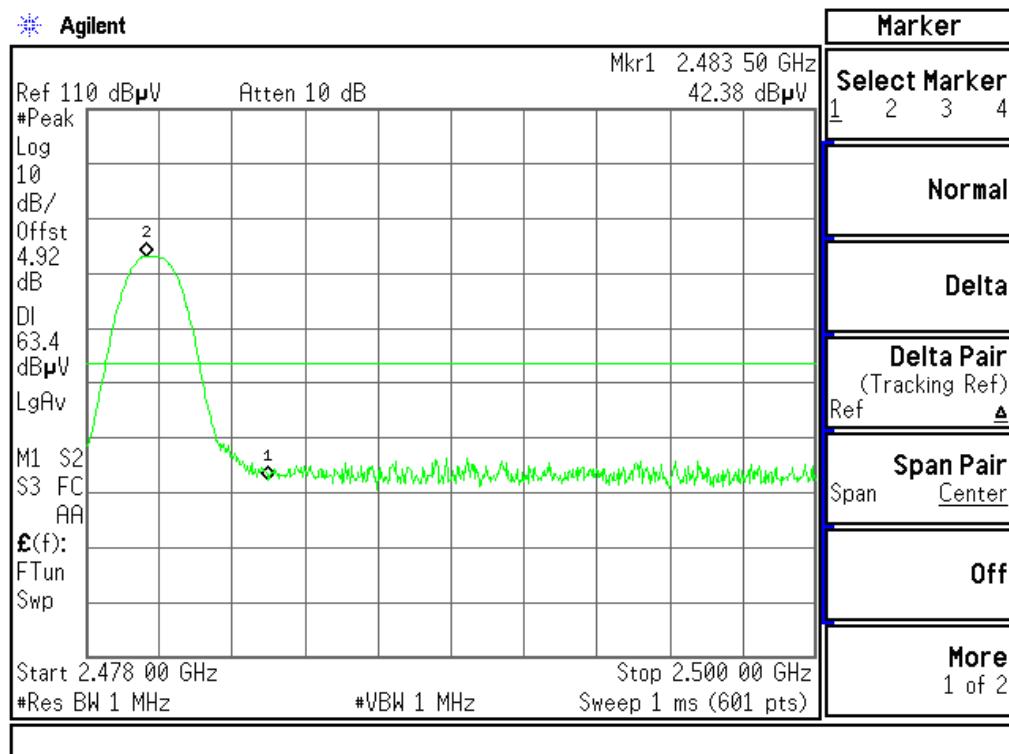

Detector mode: Peak

Polarity: Horizontal

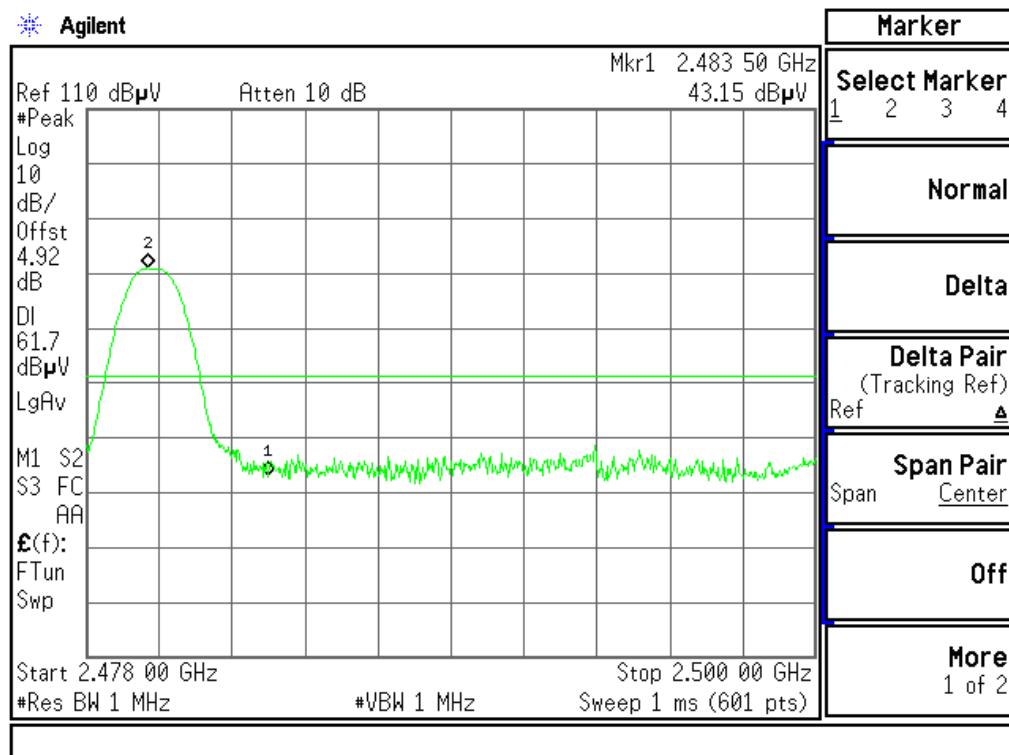

5.3 Frequency Separation


5.3.1 Limit

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

5.3.2 Test Equipment

| Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|-------------------|--------------|-------------|------------|---------------|---------------|
| Spectrum Analyzer | Agilent | E4407B | MY41440292 | June 29, 2010 | 1 Year |
| RF Cable | Hubersuhne | Sucoflex104 | FP2RX2 | June 29, 2010 | 1 Year |
| DC Filter | MPE | 23872C | N/A | June 29, 2010 | 1 Year |

5.3.3 Block Diagram of Test Setup

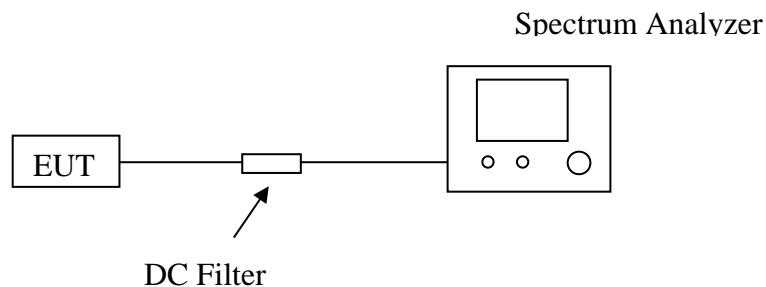



5.3.4 Test Procedure


- Place the EUT on the table and set it in transmitting mode.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- Set center frequency of spectrum analyzer = middle of hopping channel.
- Set the spectrum analyzer as RBW = 30kHz, VBW = 100kHz, Span = 3MHz, Sweep = auto.
- Max hold, mark 2 peaks of hopping channel and record the 2 peaks frequency.

5.3.5 Test Results


| Channel Separation (MHz) | 20dB Bandwidth (kHz) | Limit (kHz) | Result |
|--------------------------|----------------------|-------------|--------|
| 1.000 | 942. 569 | >628.38 | Pass |



The test data graph please refer to the following page.

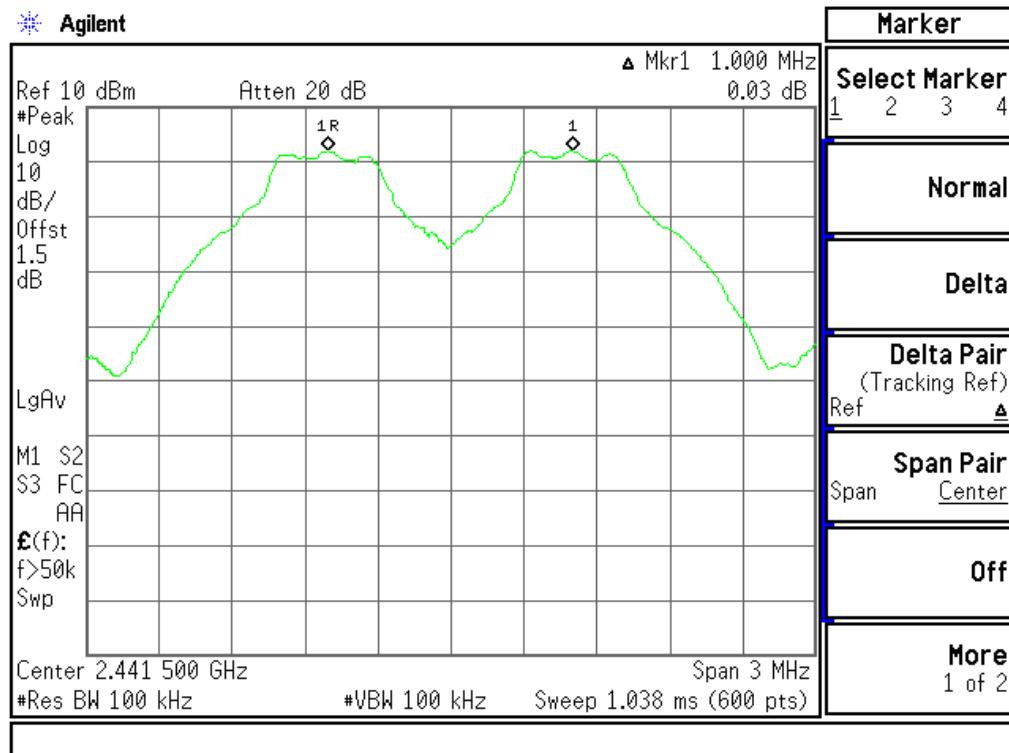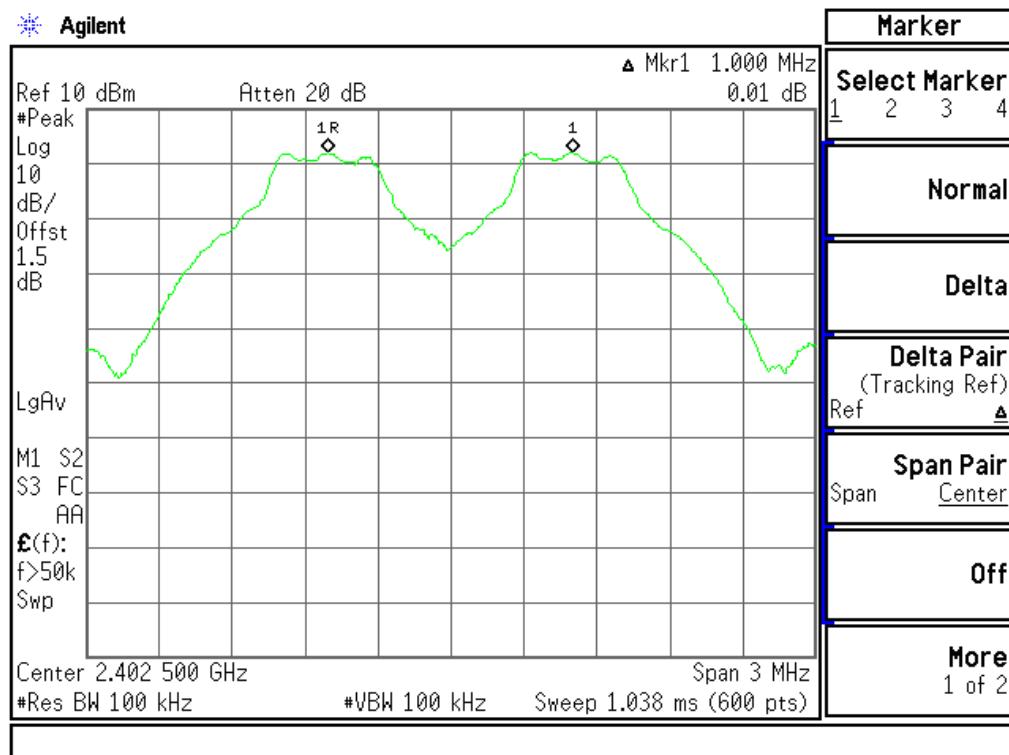Test Plot**Measurement of Channel Separation**

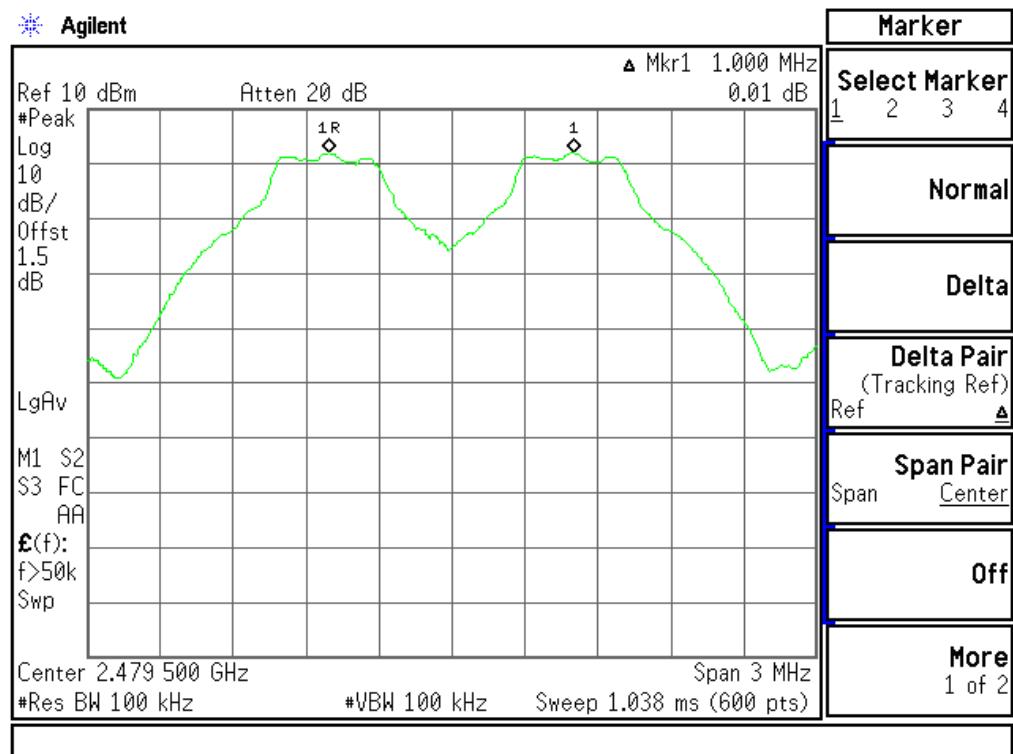

Measurement of 20dB Bandwidth

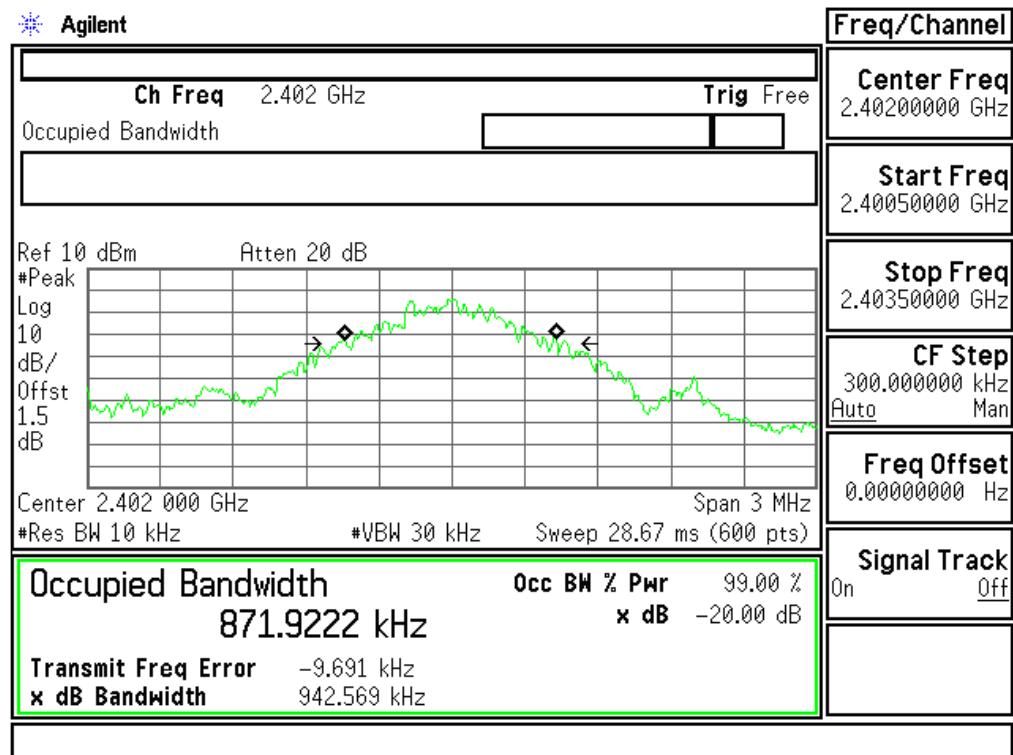

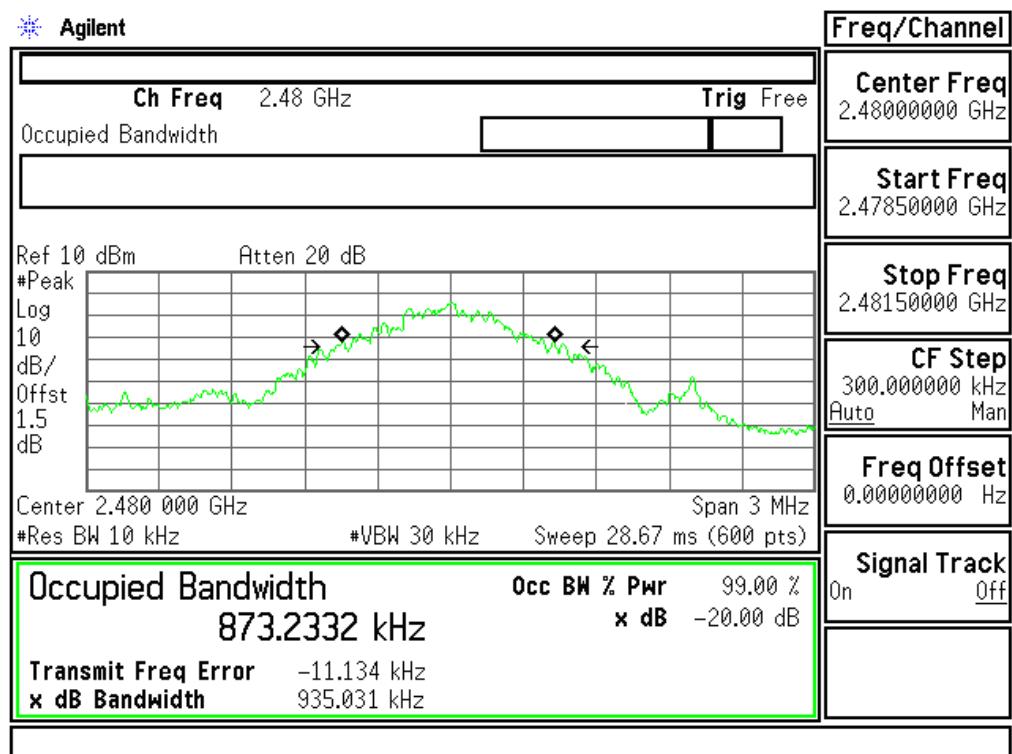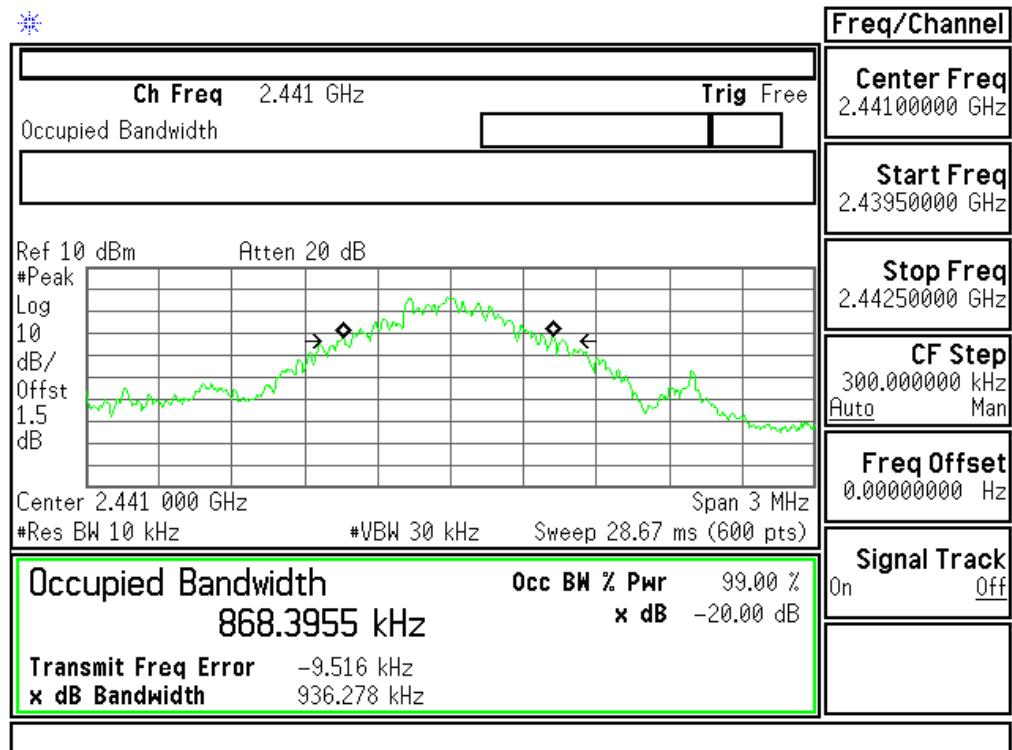

5.4 Number Of Hopping Frequency


5.4.1 Limit

According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 75 hopping frequencies.

5.4.2 Test Equipment

| Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|-------------------|--------------|-------------|------------|---------------|---------------|
| Spectrum Analyzer | Agilent | E4407B | MY41440292 | June 29, 2010 | 1 Year |
| RF Cable | Hubersuhne | Sucoflex104 | FP2RX2 | June 29, 2010 | 1 Year |
| DC Filter | MPE | 23872C | N/A | June 29, 2010 | 1 Year |

5.4.3 Block Diagram of Test Setup

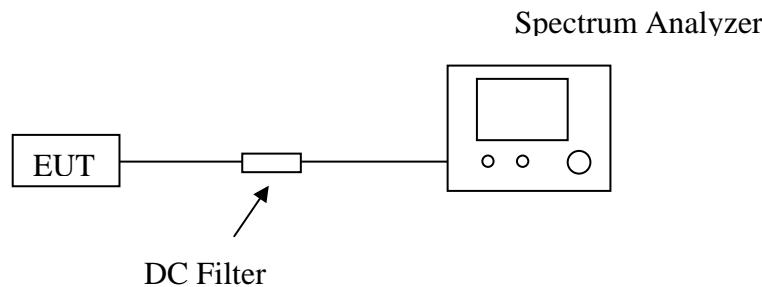



5.4.4 Test Procedure

- Place the EUT on the table and set it in transmitting mode.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- Set spectrum analyzer Start=2400MHz, Stop = 2441.5MHz, Sweep = auto and Start=2441.5MHz, Stop = 2483.5MHz, Sweep = auto.
- Set the spectrum analyzer as RBW, VBW=100kHz.
- Max hold, view and count how many channel in the band.

5.4.5 Test Results

| Result (No. of CH) | Limit (No. of CH) | Result |
|--------------------|-------------------|--------|
| 79 | >75 | PASS |

The test data graph please refer to the following page.

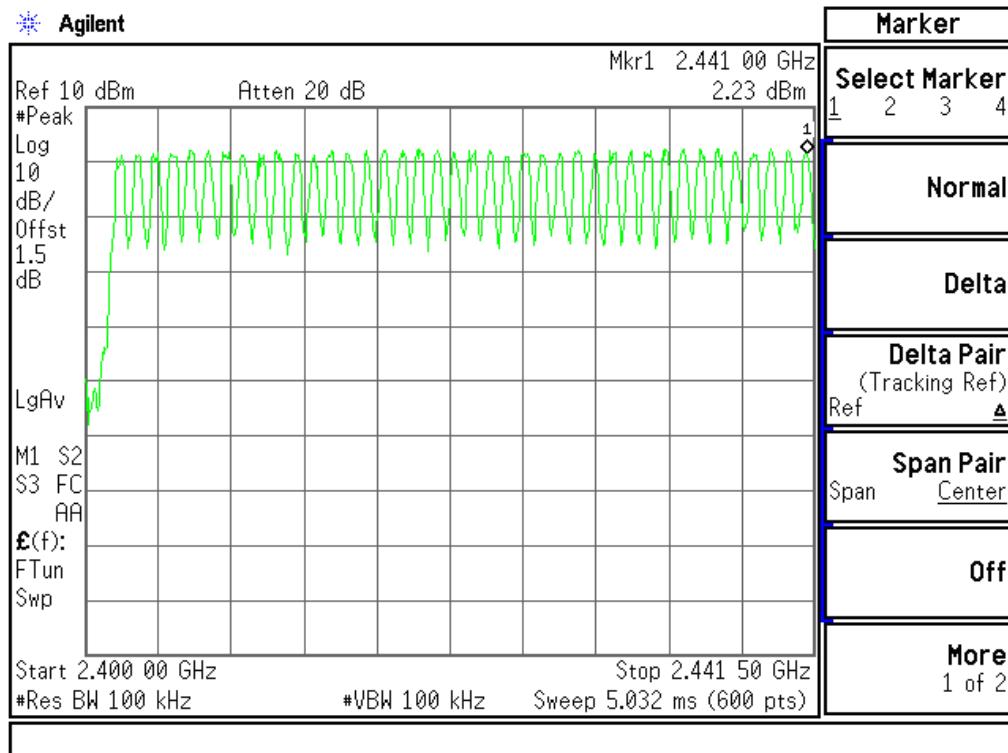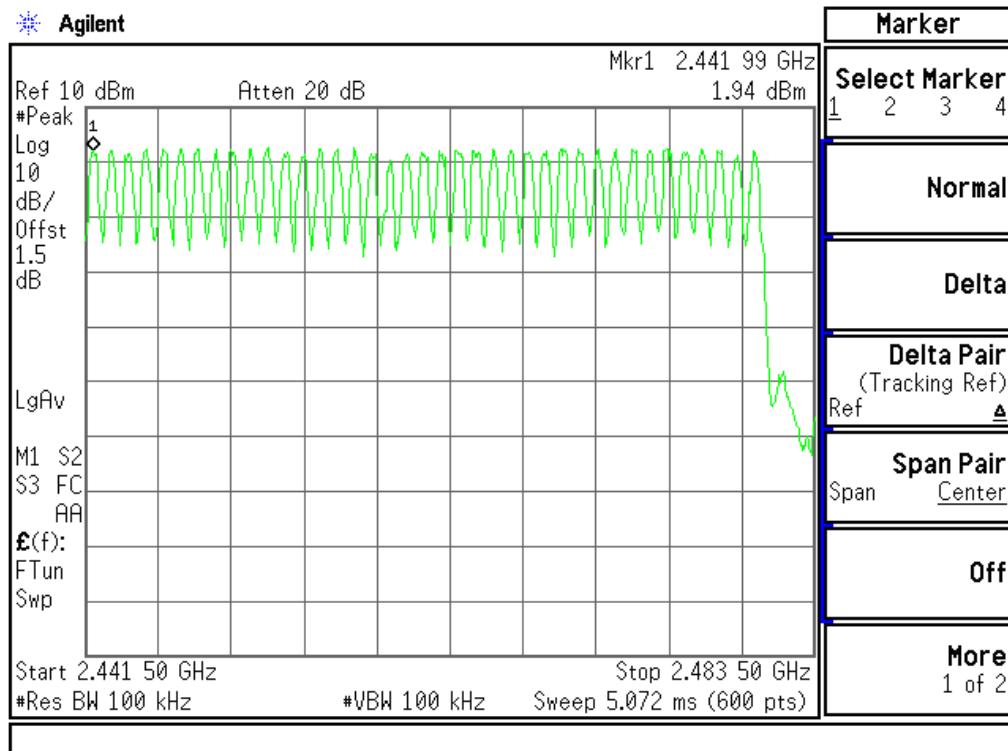Test Plot**Channel Number****2.4 GHz – 2.4415 GHz****2.4415 GHz – 2.4835 GHz**

5.5 Time Of Occupancy (Dwell Time)


5.5.1 Limit

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

5.5.2 Test Equipment

| Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|-------------------|--------------|-------------|------------|---------------|---------------|
| Spectrum Analyzer | Agilent | E4407B | MY41440292 | June 29, 2010 | 1 Year |
| RF Cable | Hubersuhne | Sucoflex104 | FP2RX2 | June 29, 2010 | 1 Year |
| DC Filter | MPE | 23872C | N/A | June 29, 2010 | 1 Year |

5.5.3 Block Diagram of Test Setup

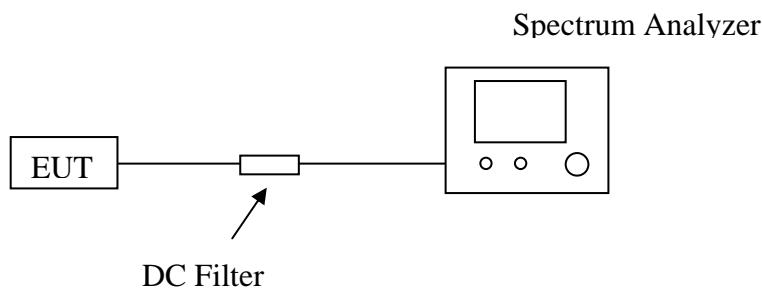

5.5.4 Test Procedure

- Place the EUT on the table and set it in transmitting mode.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- Set center frequency of spectrum analyzer = operating frequency.
- Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
- Repeat above procedures until all frequency measured were complete.

5.5.5 Test Results

DH 1

$$0.400 * (1600/2)/79 * 31.6 = 128.00 \text{ (ms)}$$

DH 3



$$1.64 * (1600/4)/79 * 31.6 = 262.40 \text{ (ms)}$$


DH 5

$$2.932 * (1600/6)/79 * 31.6 = 312.77 \text{ (ms)}$$

The test data graph please refer to the following page.

Test Plot

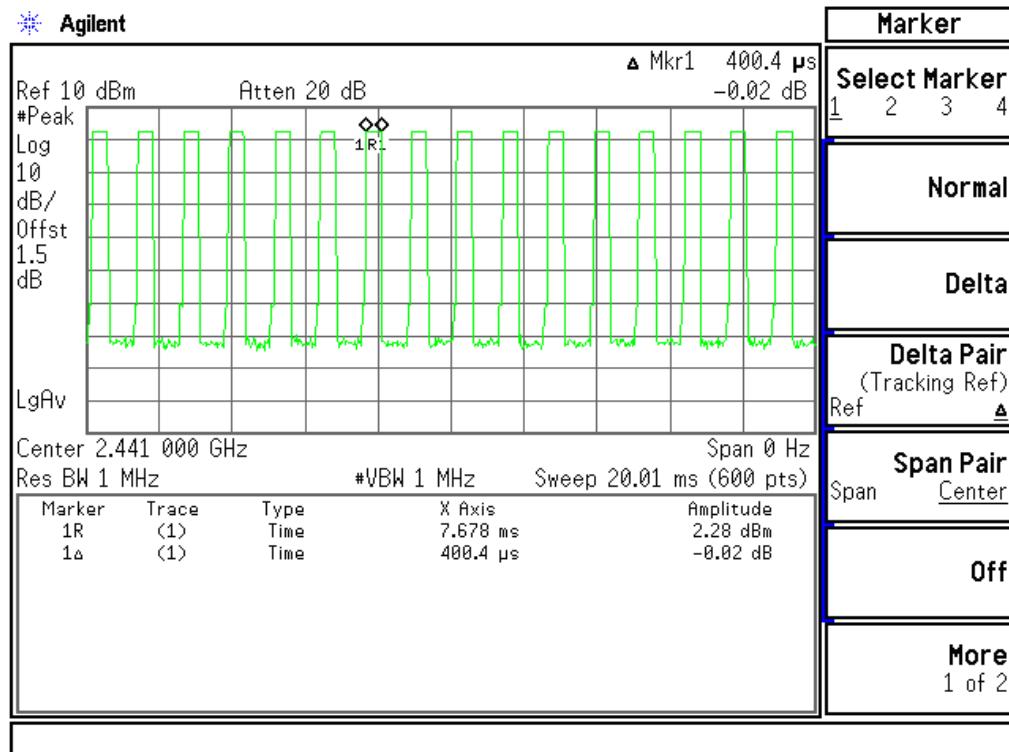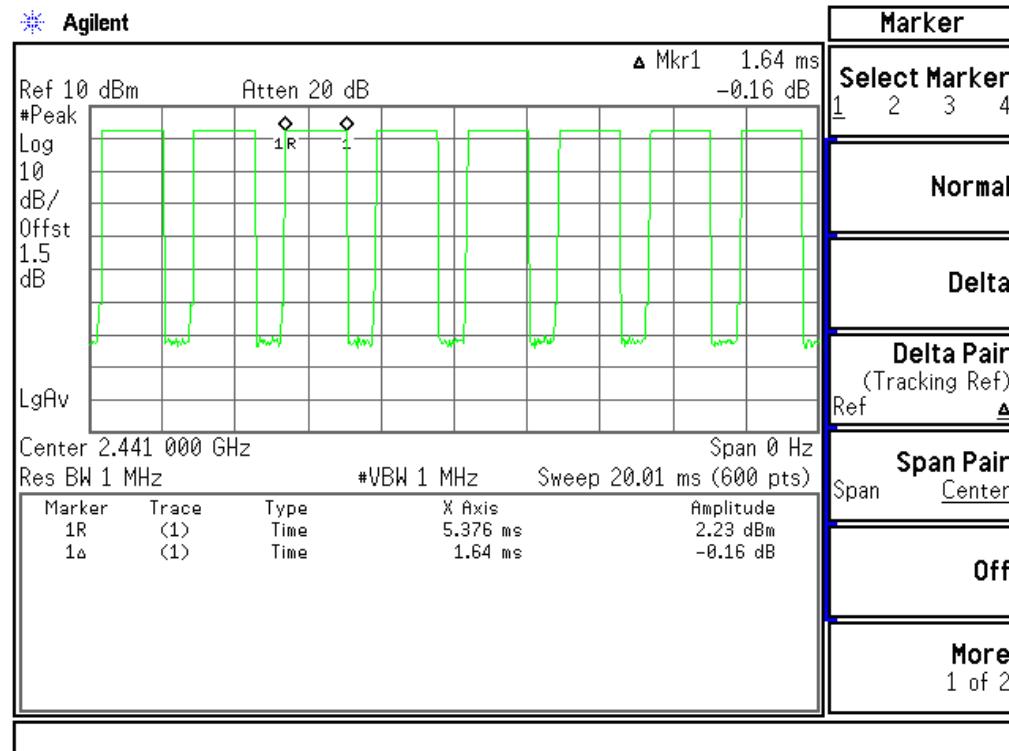DH 1**DH 3****DH 5**

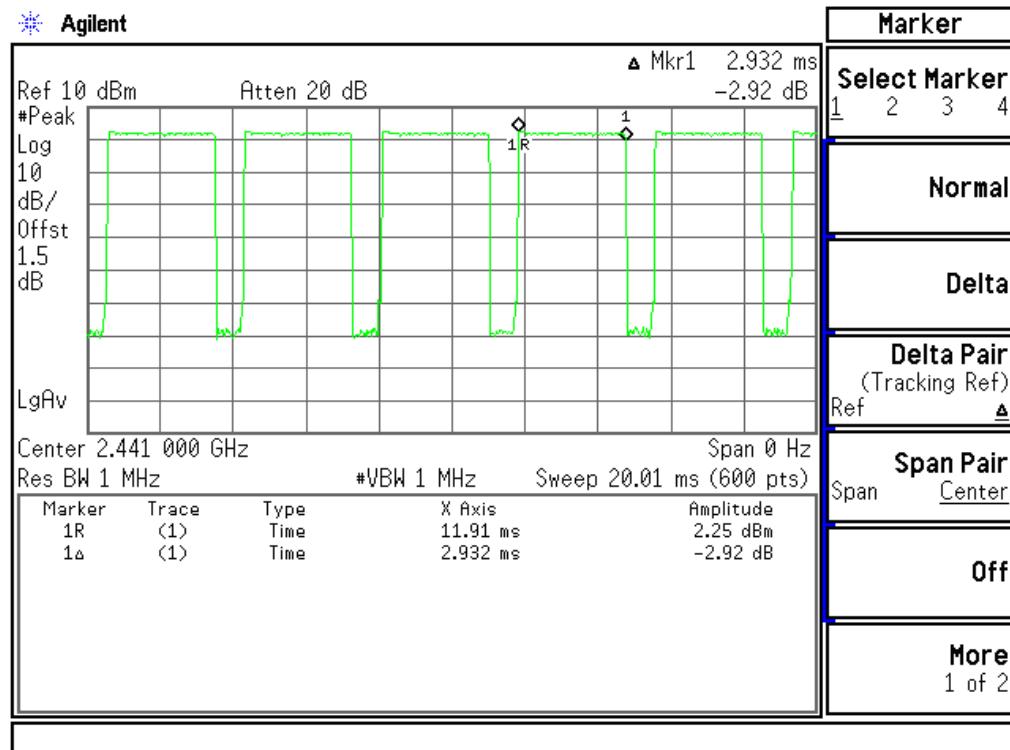

5.6 Spurious Emissions


5.6.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

5.6.2 Test Equipment

| Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|-------------------|--------------|-------------|------------|---------------|---------------|
| Spectrum Analyzer | Agilent | E4407B | MY41440292 | June 29, 2010 | 1 Year |
| RF Cable | Hubersuhne | Sucoflex104 | FP2RX2 | June 29, 2010 | 1 Year |
| DC Filter | MPE | 23872C | N/A | June 29, 2010 | 1 Year |

5.6.3 Block Diagram of Test Setup

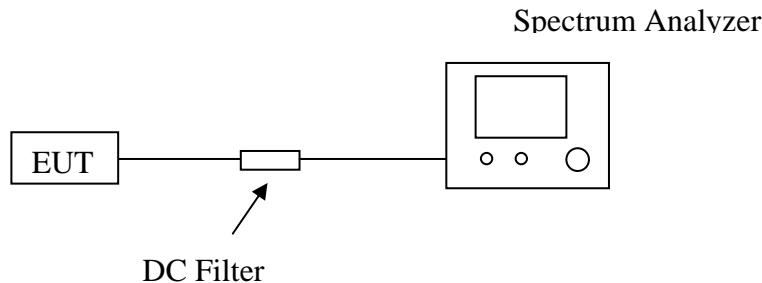

5.6.4 Test Procedure

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.



The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 KHz. The video bandwidth is set to 100 KHz.



Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.



5.6.5 Test Results

No non-compliance noted

The test data graph please refer to the following page.

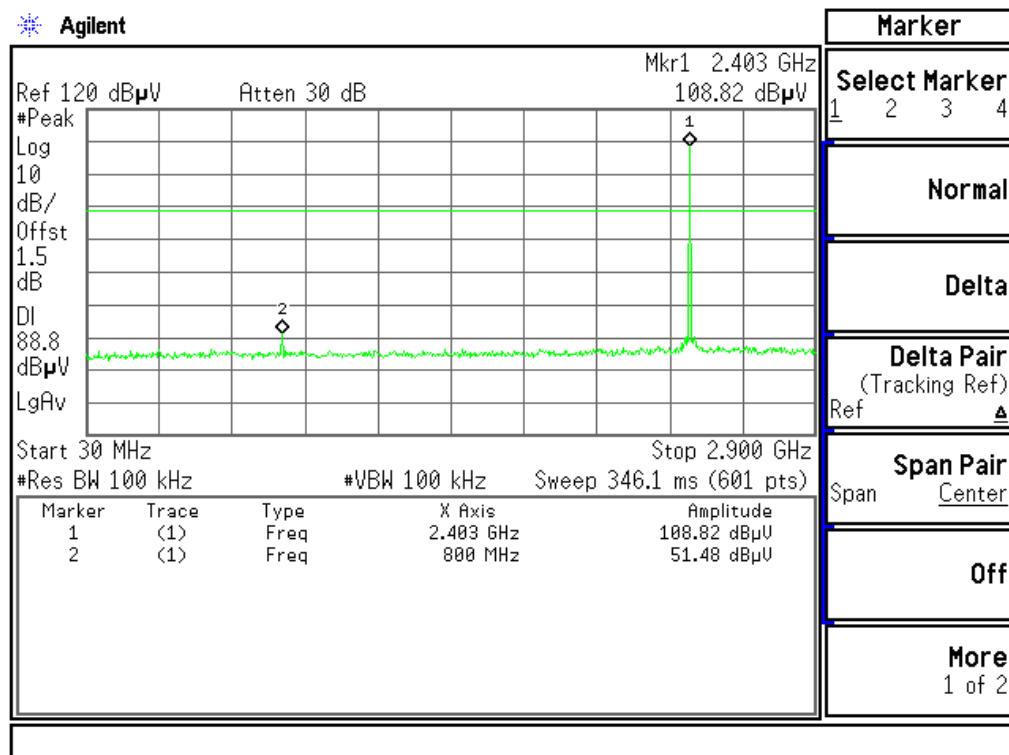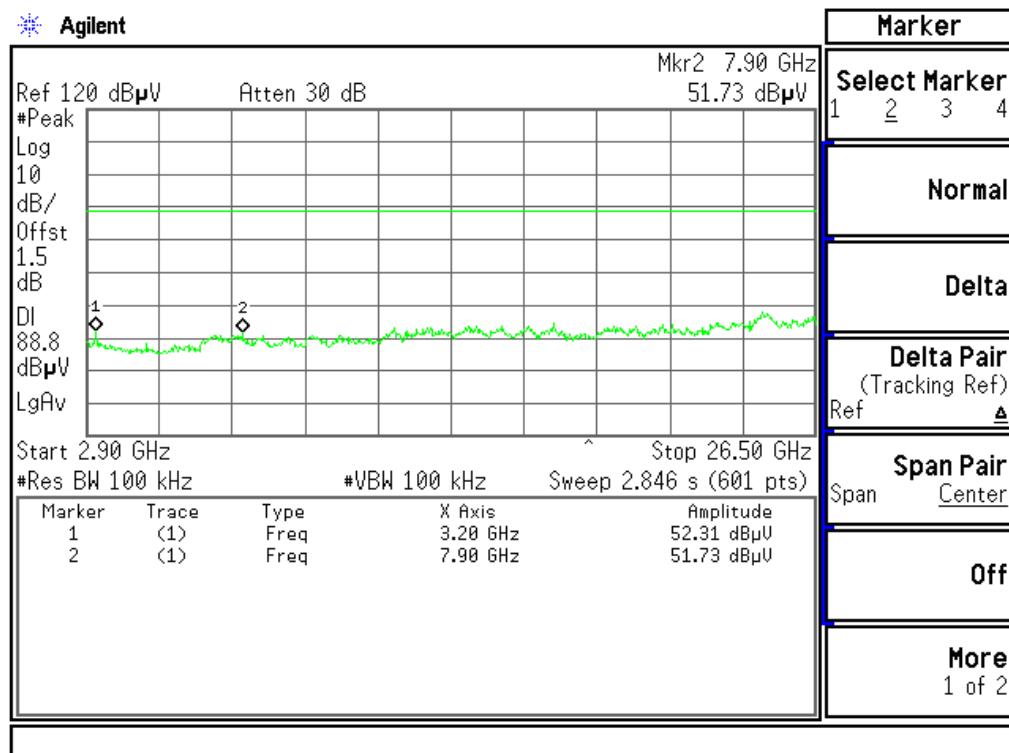Test Plot**CH Low****30MHz ~ 2.9GHz****2.9GHz ~ 26.5GHz**

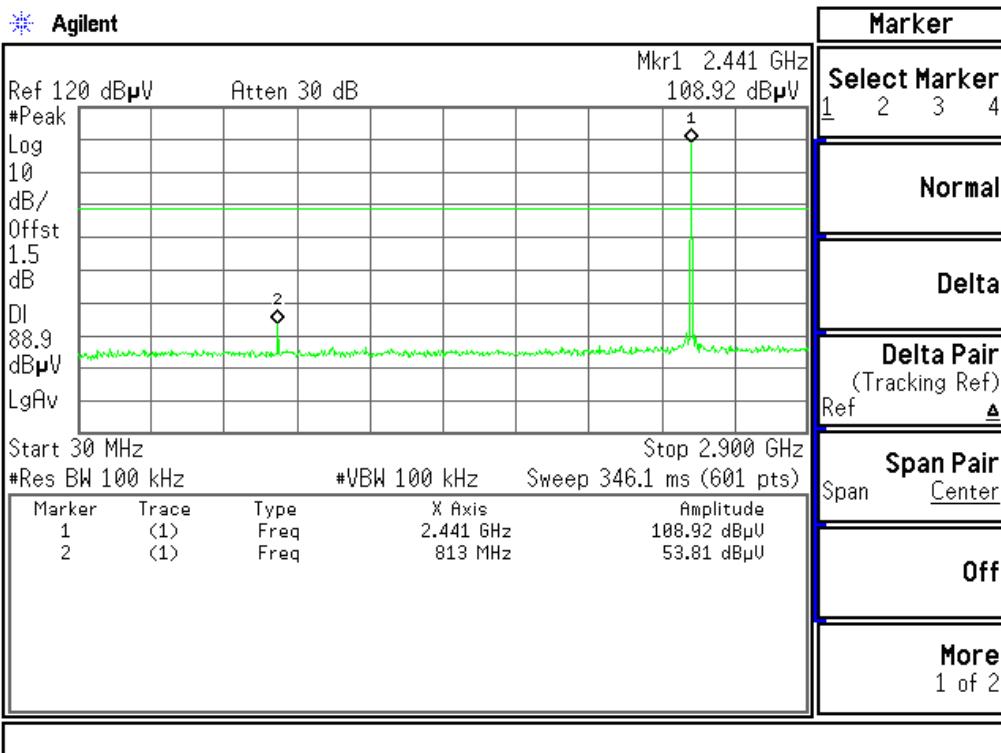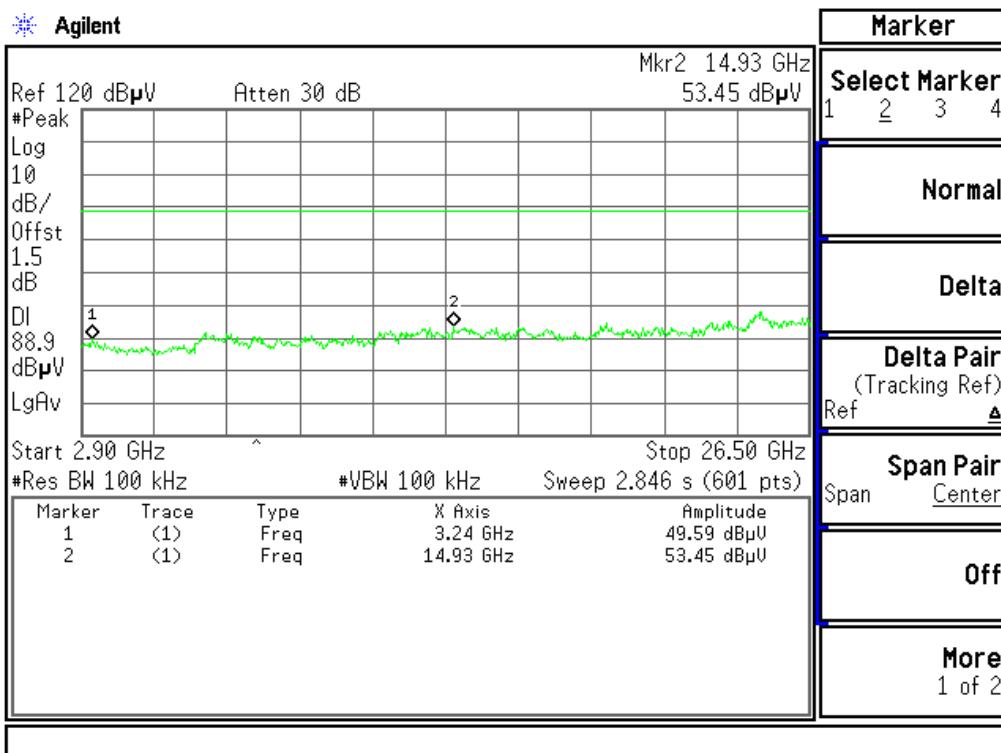CH Mid**30MHz ~ 2.9GHz****2.9GHz ~ 26.5GHz**

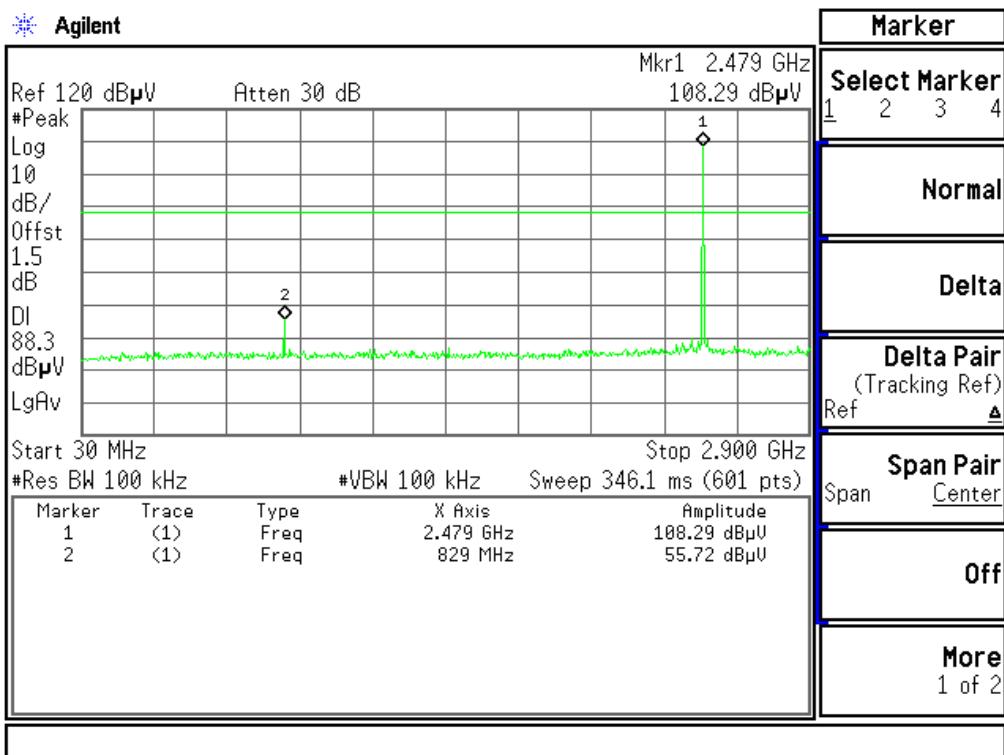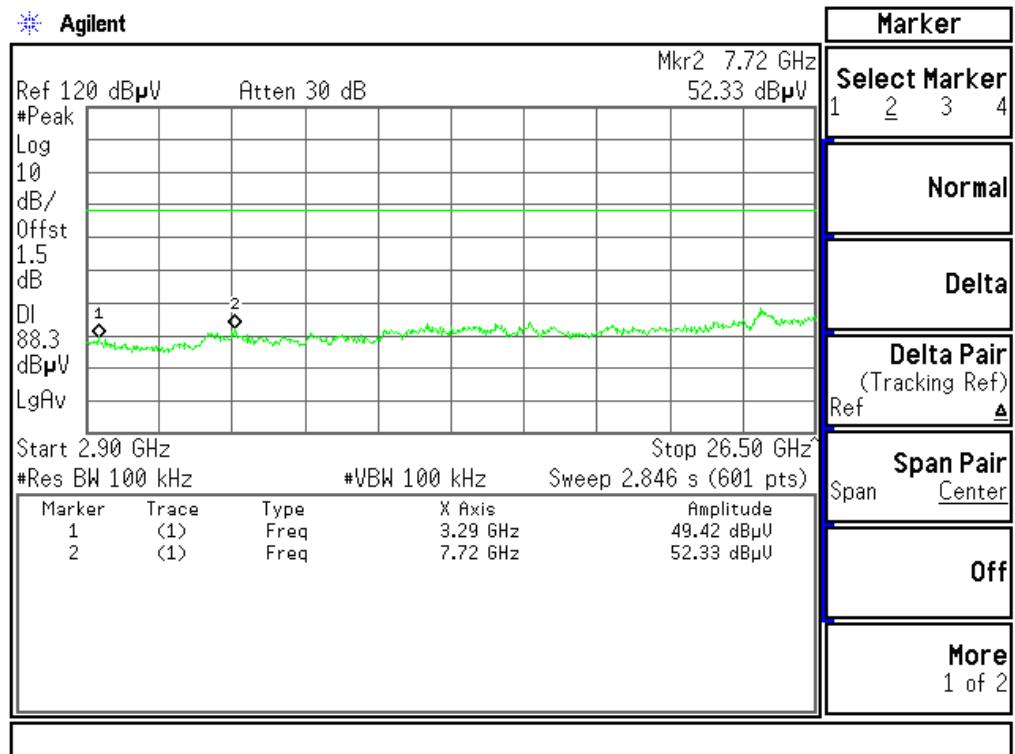
CH High**30MHz ~ 2.9GHz****2.9GHz ~ 26.5GHz**

6. RADIATED EMISSION MEASUREMENT


6.1 Test Equipment

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|-------------------|-----------------|-----------|------------|---------------|---------------|
| 1 | Spectrum Analyzer | ANRITSU | MS2661C | 6200140915 | June 29, 2010 | 1 Year |
| 2 | Test Receiver | Rohde & Schwarz | ESCS30 | 828985/018 | June 29, 2010 | 1 Year |
| 3 | Antenna | Schwarzbeck | VULB9163 | 142 | June 29, 2010 | 1 Year |
| 4 | Horn-antenna | SCHWARZBECK | BBHA9120D | D:266 | June 29, 2010 | 1 Year |

6.2 Block Diagram of Test Setup

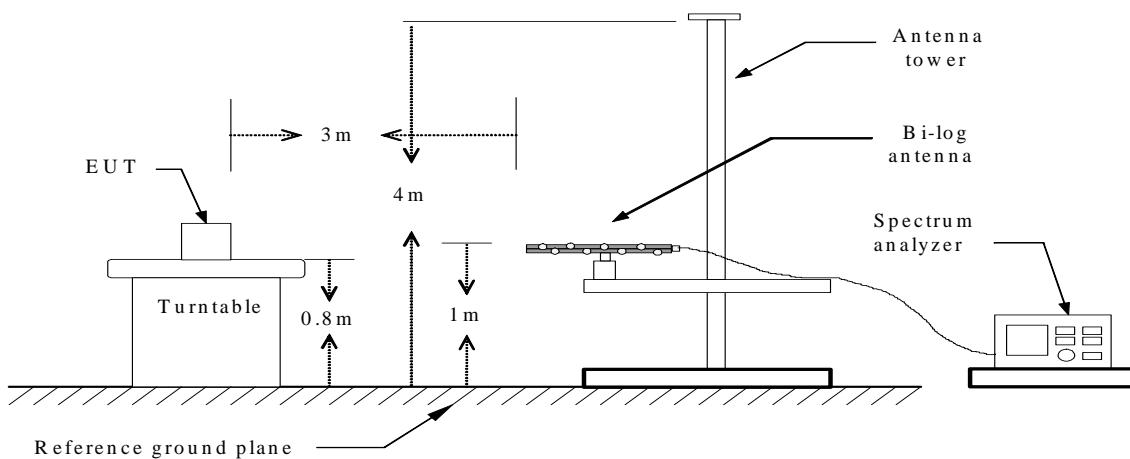

Below 1 GHz

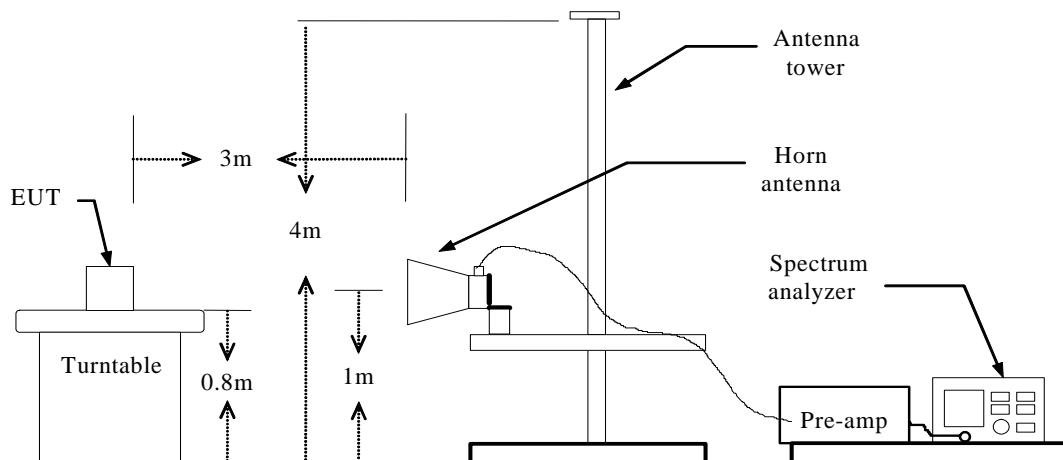

Above 1 GHz

6.3 Radiated Emission Limit

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz | MHz | MHz | GHz |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110 | 16.42-16.423 | 399.9-410 | 4.5-5.15 |
| \1\ 0.495-0.505 | 16.69475-16.69525 | 608-614 | 5.35-5.46 |
| 2.1735-2.1905 | 16.80425-16.80475 | 960-1240 | 7.25-7.75 |
| 4.125-4.128 | 25.5-25.67 | 1300-1427 | 8.025-8.5 |
| 4.17725-4.17775 | 37.5-38.25 | 1435-1626.5 | 9.0-9.2 |
| 4.20725-4.20775 | 73-74.6 | 1645.5-1646.5 | 9.3-9.5 |
| 6.215-6.218 | 74.8-75.2 | 1660-1710 | 10.6-12.7 |
| 6.26775-6.26825 | 108-121.94 | 1718.8-1722.2 | 13.25-13.4 |
| 6.31175-6.31225 | 123-138 | 2200-2300 | 14.47-14.5 |
| 8.291-8.294 | 149.9-150.05 | 2310-2390 | 15.35-16.2 |
| 8.362-8.366 | 156.52475-156.52525 | 2483.5-2500 | 17.7-21.4 |
| 8.37625-8.38675 | 156.7-156.9 | 2690-2900 | 22.01-23.12 |
| 8.41425-8.41475 | 162.0125-167.17 | 3260-3267 | 23.6-24.0 |
| 12.29-12.293 | 167.72-173.2 | 3332-3339 | 31.2-31.8 |
| 12.51975-12.52025 | 240-285 | 3345.8-3358 | 36.43-36.5 |
| 12.57675-12.57725 | 322-335.4 | 3600-4400 | (2) |
| 13.36-13.41 | | | |

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

\2\ Above 38.6

Part 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector.

Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

Part 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|--------------------|--------------------------------------|----------------------------------|
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |

6.4 Test Results

PASS.

The test data please refer to following page.

Below 1GHz**Operation Mode:** TX/ CH Low**Test Date:** May 28, 2011**Temperature:** 23°C**Humidity:** 50 % RH

| Freq. (MHz) | Ant.Pol. H/V | Detector Mode | Reading (dBuV) | Factor (dB) | Actual FS (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|----------------|-----------------|------------------|-------------------|----------------|-----------------------|-------------------|----------------|
| 53.32 | V | Peak | 17.4 | 13.54 | 30.94 | 43.5 | -12.56 |
| 127.31 | V | Peak | 18.39 | 7.59 | 25.98 | 43.5 | -17.52 |
| 168.34 | V | Peak | 19.93 | 9.78 | 29.71 | 43.5 | -13.79 |
| 300.48 | V | Peak | 17.46 | 13.88 | 31.34 | 46.0 | -14.66 |
| 371.98 | V | Peak | 18.73 | 16.13 | 34.86 | 46.0 | -11.14 |
| 844.12 | V | Peak | 16.34 | 20.31 | 36.65 | 46.0 | -9.35 |
| <hr/> | | | | | | | |
| 144.58 | H | Peak | 21.03 | 9.01 | 30.04 | 43.5 | -13.46 |
| 215.24 | H | Peak | 16.08 | 10.81 | 26.89 | 43.5 | -16.61 |
| 270.53 | H | Peak | 18.94 | 13.10 | 32.04 | 46.0 | -13.96 |
| 298.90 | H | Peak | 18.56 | 13.89 | 32.45 | 46.0 | -13.55 |
| 369.89 | H | Peak | 17.01 | 16.08 | 33.09 | 46.0 | -12.91 |
| 883.51 | H | Peak | 14.37 | 22.37 | 36.74 | 46.0 | -9.26 |

Notes:

1. Measuring frequencies from 30 MHz to the 1GHz, No emission found between lowest internal used/generated frequency to 30 MHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.

Above 1GHz**Operation Mode:** TX/ CH Low**Temperature:** 23°C**Test Date:** May 28, 2011**Humidity:** 50 % RH

| Freq. (MHz) | Ant. Pol H/V | Peak Reading (dBuV) | AV Reading (dBuV) | Ant. / CL CF (dB) | Actual Fs | | Peak Limit (dBuV/m) | AV Limit (dBuV/m) | Margin (dB) | Remark |
|----------------|-----------------|---------------------------|-------------------------|-------------------------|------------------|----------------|---------------------------|-------------------------|----------------|--------|
| | | | | | Peak (dBuV/m) | AV (dBuV/m) | | | | |
| 4804.11 | V | 40.11 | 28.87 | 10.98 | 50.23 | 39.46 | 74 | 54 | -14.54 | Avg |
| 7206.21 | V | 32.19 | 21.46 | 18.54 | 51.22 | 40.11 | 74 | 54 | -13.89 | Avg |
| | | | | | | | | | | |
| 4804.10 | H | 39.22 | 28.11 | 10.98 | 50.22 | 39.26 | 74 | 54 | -14.74 | Avg |
| 7206.20 | H | 33.12 | 20.46 | 18.53 | 51.67 | 39.01 | 74 | 54 | -14.99 | Avg |
| | | | | | | | | | | |

Operation Mode: TX/ CH Mid**Temperature:** 23°C**Test Date:** May 28, 2011**Humidity:** 50% RH

| Freq. (MHz) | Ant. Pol H/V | Peak Reading (dBuV) | AV Reading (dBuV) | Ant. / CL CF (dB) | Actual Fs | | Peak Limit (dBuV/m) | AV Limit (dBuV/m) | Margin (dB) | Remark |
|----------------|-----------------|---------------------------|-------------------------|-------------------------|------------------|----------------|---------------------------|-------------------------|----------------|--------|
| | | | | | Peak (dBuV/m) | AV (dBuV/m) | | | | |
| 4883.10 | V | 40.69 | 28.88 | 10.98 | 51.67 | 39.86 | 74 | 54 | -14.14 | Avg |
| 7324.33 | V | 32.89 | 21.58 | 18.54 | 51.43 | 40.12 | 74 | 54 | -13.88 | Avg |
| | | | | | | | | | | |
| 4883.67 | H | 39.46 | 28.83 | 10.98 | 50.44 | 39.81 | 74 | 54 | -14.19 | Avg |
| 7324.25 | H | 33.19 | 20.52 | 18.53 | 51.72 | 39.05 | 74 | 54 | -14.95 | Avg |
| | | | | | | | | | | |

Operation Mode: TX/ CH High**Temperature:** 23°C**Test Date:** May 28, 2011**Humidity:** 50 % RH


| Freq. (MHz) | Ant. Pol H/V | Peak Reading (dBuV) | AV Reading (dBuV) | Ant. / CL CF (dB) | Actual Fs | | Peak Limit (dBuV/m) | AV Limit (dBuV/m) | Margin (dB) | Remark |
|----------------|-----------------|---------------------------|-------------------------|-------------------------|------------------|----------------|---------------------------|-------------------------|----------------|--------|
| | | | | | Peak (dBuV/m) | AV (dBuV/m) | | | | |
| 4961.00 | V | 40.04 | 28.83 | 10.98 | 51.02 | 39.81 | 74 | 54 | -14.19 | Avg |
| 7441.69 | V | 31.59 | 21.33 | 18.54 | 50.13 | 39.87 | 74 | 54 | -14.13 | Avg |
| | | | | | | | | | | |
| 4960.25 | H | 38.25 | 27.53 | 10.98 | 49.23 | 38.51 | 74 | 54 | -15.49 | Avg |
| 7440.00 | H | 31.59 | 20.24 | 18.53 | 50.12 | 38.77 | 74 | 54 | -15.23 | Avg |
| | | | | | | | | | | |

7. POWER LINE CONDUCTED EMISSIONS

7.1 Test Equipment

| Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|---------------|-----------------|-----------|------------|---------------|---------------|
| Test Receiver | Rohde & Schwarz | ESCS30 | 828985/018 | June 29, 2010 | 1 Year |
| L.I.S.N | Rohde & Schwarz | ESH2-Z5 | 834549/005 | June 29, 2010 | 1 Year |
| Pulse Limiter | Rohde & Schwarz | ESH3-Z2 | 100006 | June 29, 2010 | 1 Year |

7.2 Block Diagram of Test Setup

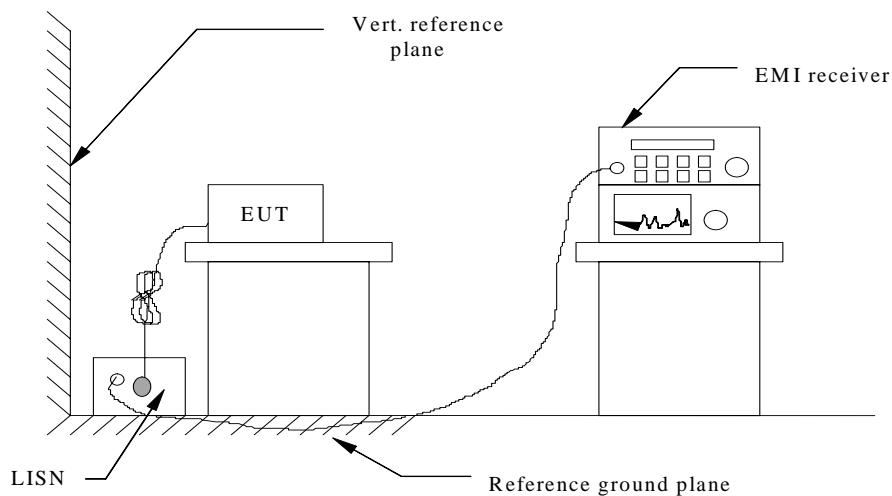

7.3 Conducted Emission Limit

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

| Frequency Range (MHz) | Limits (dB μ V) | |
|-----------------------|---------------------|----------|
| | Quasi-peak | Average |
| 0.15 to 0.50 | 66 to 56 | 56 to 46 |
| 0.50 to 5 | 56 | 46 |
| 5 to 30 | 60 | 50 |

7.4 Test Results

PASS.

The test data please refer to following page.

According to section 15.207 and 15.247 of FCC Part 15, Tests to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

8. ANTENNA REQUIREMENT

8.1 Standard Applicable

According to §15.203, Antenna requirement.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

8.2 Antenna Connected Construction

The directional gains of antenna used for transmitting is 1.5dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see EUT photo for details.

9. MANUFACTURER/ APPROVAL HOLDER DECLARATION

The following identical model(s):

M01-1

M01-2

M21

M21-1

M21-2

Belong to the tested device:

Product description : Wireless Mouse
Model name : M01

-----THE END OF REPORT-----