



Tecnolab del Lago Maggiore S.r.l.  
ISTITUTO DI PROVE, MISURE E RICERCHE, ING. MICHELE SETARO  
Via dell'Industria, 20  
28924 Verbania Fondotoce (VB) – Italy

## TEST REPORT RP010811

### EMC test for FCC Certification procedure on remote controller VT2

2011/05/19

Page 1 di 23

**CUSTOMER**  
Cliente

**Open Data s.r.l.**  
Via Anticolana km 0,300  
03012 Anagni (FR)  
Italy

**CONTRACT**  
Commissa

**CO018710- 2010/11/30**

**TEST REPORT**  
Rapporto di Prova

**RP010811**

**EMC test for FCC Certification procedure on remote controller  
VT2**

**APPLICABLE STANDARDS**  
Norme di riferimento

➤ **FCC Rules : Code of Federal Regulations (CFR) no. 47 Ch1  
(10-1-09 Edition)**  
**PART 15 - RADIO FREQUENCY DEVICES**

2011/05/21

Assistant Head of Sector  
Eng. Marco Mai  
*Marco Mai*

Head of Sector  
Eng. Danilo Prina  
*Danilo Prina*

Head of Laboratory  
Eng. Michele Setaro  
*Michele Setaro*

Questo documento è firmato elettronicamente; le firme sono certificate da InfoCert S.p.a.  
This document is signed electronically; signatures are certified by InfoCert S.p.a.

**Data**  
Date

**Redazione**  
Redaction

**Verifica Tecnica**  
Technical Check

**Autorizzazione**  
Authorization

È vietata la riproduzione parziale del presente documento senza l'autorizzazione scritta di TECNOLAB.

*It is prohibited to reproduce partially this document without the prior written permission of TECNOLAB.*

Tutte le pagine del presente documento sono volutamente lasciate in bianco sul retro.

*All the pages of this document have the back left intentionally blank.*



Tecnolab del Lago Maggiore S.r.l.  
ISTITUTO DI PROVE, MISURE E RICERCHE, ING. MICHELE SETARO  
Via dell'Industria, 20  
28924 Verbania Fondotoce (VB) – Italy

TEST REPORT RP010811	
EMC test for FCC Certification procedure on remote controller VT2	
2011/05/19	Page 2 di 23

	Table of contents	Page.n.
<b>1. GENERAL REMARKS</b>		<b>3</b>
<b>1.1 Customer data</b>		<b>3</b>
<b>1.2 Identification of equipment and/or subsystem under test (EUT)</b>		<b>3</b>
<b>1.3 Identification of auxiliary equipment not under test (AE)</b>		<b>3</b>
<b>1.4 Identification of connecting cables</b>		<b>3</b>
<b>1.5 Sampling</b>		<b>3</b>
<b>2. SCOPE</b>		<b>3</b>
<b>3. APPLICABLE DOCUMENTS</b>		<b>3</b>
<b>3.1 Applicability</b>		<b>3</b>
<b>3.2 Definitions and glossary of terms</b>		<b>4</b>
<b>3.3 Other definitions and abbreviations</b>		<b>4</b>
<b>4. EUT FUNCTIONAL DESCRIPTION</b>		<b>4</b>
<b>4.1 EUT description and operating method during tests</b>		<b>4</b>
<b>4.2 Test set-up and EUT configuration</b>		<b>4</b>
<b>5. TECHNICAL COMPETENCE</b>		<b>4</b>
<b>6. TEST PERFORMED</b>		<b>5</b>
<b>6.1 General</b>		<b>5</b>
<b>6.1.1 Test firm identification</b>		<b>5</b>
<b>6.1.2 List and description of tests</b>		<b>5</b>
<b>6.1.3 Uncertainty of measurement</b>		<b>5</b>
<b>6.2 Radiated Emission measurements</b>		<b>6</b>
<b>6.3 Occupied bandwidth</b>		<b>7</b>
<b>7. ANNEXES</b>		<b>8</b>



Tecnolab del Lago Maggiore S.r.l.  
ISTITUTO DI PROVE, MISURE E RICERCHE, ING. MICHELE SETARO  
Via dell'Industria, 20  
28924 Verbania Fondotoce (VB) – Italy

## TEST REPORT RP010811

### EMC test for FCC Certification procedure on remote controller VT2

2011/05/19

Page 3 di 23

## 1. GENERAL REMARKS

### 1.1 Customer data

Customer:	<b>Open Data s.r.l.</b>
Address:	Via Anticolana km 0,300 03012 Anagni (FR) Italy

### 1.2 Identification of equipment and/or subsystem under test (EUT)

EUT (equipment or subsystem) n°:	1
Mark:	<b>Open Data</b>
Model:	VT2
FCC ID	ZMNVT2USA
Acceptance code:	AC017711/3
Receiving date:	2011/03/21
Description:	The VT2 is an RF control device with a 2 digit LCD, used for remotely controlling the VD1 queue system display. See annex 1,2 and 3 of this test report.

### 1.3 Identification of auxiliary equipment not under test (AE)

EUT does not require auxiliary equipment for its operation.

### 1.4 Identification of connecting cables

EUT does not have any cable for its operation. EUT is powered by a 9V battery.

### 1.5 Sampling

The results shown in this Technical Report exclusively refer to the sample under test, taken away from the production by Customer. Extension of test results to the whole production is the responsibility of manufacturer/importer.

## 2. SCOPE

Scope of the test and the measurement is to supply the Customer with useful indications in order to evaluate EUT compliance with Electromagnetic Compatibility Reference Standards; the performed test plan is required from the manufacturer.

## 3. APPLICABLE DOCUMENTS

FCC Rules	FCC Rules : Code of Federal Regulations (CFR) no. 47 Ch1 (10-1-09 Edition) PART 15 - RADIO FREQUENCY DEVICES
-----------	---

### 3.1 Applicability

Applicable parties regarding the certification procedure for intentional radiator operating at frequency 433,9 MHz.

According to the definition 15.3 (o)EUT is an Intentional Radiator with periodic operation at frequency 433,9 MHz so it shall fulfil provisions of 47CFR part 15 Subpart C – intentional radiators – and section 15.231. Section 15.231 is applicable because EUT is a manually operated transmitter who employ a switch that will automatically deactivate the transmitter within not more than 5 seconds after activation.



Tecnolab del Lago Maggiore S.r.l.  
ISTITUTO DI PROVE, MISURE E RICERCHE, ING. MICHELE SETARO  
Via dell'Industria, 20  
28924 Verbania Fondotoce (VB) – Italy

## TEST REPORT RP010811

### EMC test for FCC Certification procedure on remote controller VT2

2011/05/19

Page 4 di 23

#### 3.2 Definitions and glossary of terms

Applicable IEC 50 IEV Standard definitions.  
AE Auxiliary Equipment  
CE Conducted Emission  
EMC Electromagnetic Compatibility  
EUT Equipment Under Test  
RE Radiated Emission

#### 3.3 Other definitions and abbreviations

GRP Ground reference plane  
BH Biconical antenna in horizontal polarization  
BV Biconical antenna in vertical polarization  
LH Log-periodic antenna in horizontal polarization  
LV Log-periodic antenna in vertical polarization  
HH Horn antenna in horizontal polarization  
HV Horn antenna in vertical polarization  
Loop F Loop antenna in frontal position  
Loop L Loop antenna in lateral position  
Pass In compliance with reference Standard  
Fail Not in compliance with reference Standard

### 4. EUT FUNCTIONAL DESCRIPTION

#### 4.1 EUT description and operating method during tests

The VT2 is an RF control device with a 2 digit LCD, used for remotely controlling the VD1 queue system display.

The main function of the VT2 is to turn feed the numbers displayed by VD1 onto a local LCD display. For this purpose, the VT2 has a receiving module and a transmitting module which operate in the ISM 433.92 MHz band.

The device was tested by moving forward in a progressive manner the numbers.

#### 4.2 Test set-up and EUT configuration

EUT is powered by a 9V battery.

### 5. TECHNICAL COMPETENCE

Technicians qualified for the execution of the tests are engineers with at least three months of experience in Measurements and Testing.



Tecnolab del Lago Maggiore S.r.l.  
ISTITUTO DI PROVE, MISURE E RICERCHE, ING. MICHELE SETARO  
Via dell'Industria, 20  
28924 Verbania Fondotoce (VB) – Italy

## TEST REPORT RP010811

### EMC test for FCC Certification procedure on remote controller VT2

2011/05/19

Page 5 di 23

## 6. TEST PERFORMED

### 6.1 General

#### 6.1.1 Test firm identification

Tests were performed at laboratory: Tecnolab del Lago Maggiore S.r.l., Via dell'Industria 20, 28924 Verbania Fondotoce (VB) ITALY.

REGISTRATION NUMBER: **868554**

#### 6.1.2 List and description of tests

Test	Applicable Standard	Port	Paragraph of this test report	Result
Antenna requirement	47 CFR 15.203 /15.204	/	/	Use of permanently attached antenna shall be considered sufficient to comply the provisions of this section.
Radiated emissions measurements	47 CFR 15.205 47 CFR 15.209 47 CFR 15.231 (b)	Enclosure port	6.2	<b>Pass</b>
Occupied bandwidth for device operating over 70 MHz and under 900 MHz	47 CFR 15.231 (c)	Enclosure port	6.3	<b>Pass</b>

#### 6.1.3 Uncertainty of measurement

The uncertainty of measurement stated in this document are expressed as expanded uncertainty obtained by multiplying the standard uncertainty by the coverage factor K = 2 corresponding to a confidence level of about 95%.



Tecnolab del Lago Maggiore S.r.l.  
ISTITUTO DI PROVE, MISURE E RICERCHE, ING. MICHELE SETARO  
Via dell'Industria, 20  
28924 Verbania Fondotoce (VB) – Italy

## TEST REPORT RP010811

### EMC test for FCC Certification procedure on remote controller VT2

2011/05/19

Page 6 di 23

## 6.2 Radiated Emission measurements

<b>Date:</b>	2011/03/23																		
<b>Environmental condition:</b>	Temperature= 18-25 °C – Humidity= 30-50%																		
<b>Applicable Standard:</b>	47 CFR 15.205 / 47 CFR 15.209 / 47 CFR 15.231 (b)																		
<b>Test levels/Limits:</b>	<p>The electric field radiated emissions is measured at a distance of 3 m from the EUT. The reference limits at 3 m are:</p> <table><thead><tr><th>Frequency range</th><th>Limits (detector)</th></tr></thead><tbody><tr><td>5-30 MHz</td><td>69.5 dB<math>\mu</math>V/m (QP)</td></tr><tr><td>30-88 MHz</td><td>40 dB<math>\mu</math>V/m (QP)</td></tr><tr><td>88-216 MHz</td><td>43.5 dB<math>\mu</math>V/m (QP)</td></tr><tr><td>216-960 MHz</td><td>46 dB<math>\mu</math>V/m (QP)</td></tr><tr><td>960-1000 MHz</td><td>54 dB<math>\mu</math>V/m (QP)</td></tr></tbody></table> <p>In accordance with part 15.231 (b) the field strength of emission from intentional radiator shall not exceed the following average limit:</p> <table><thead><tr><th>Frequency</th><th>Limits (detector)</th></tr></thead><tbody><tr><td>433,9 MHz</td><td>80.8 dB<math>\mu</math>V/m (AVG)</td></tr><tr><td>Spurious emission</td><td>60.8 dB<math>\mu</math>V/m (AVG)</td></tr></tbody></table> <p>In accordance with part 15.31 (f) 2, where the measurement distance was specified to be 30 or 300 meters, a correction factor was applied in order to permit measurement to be performed at a separation distance.</p> <p>The applied formula for limits at 30 meter is :</p> <p>Extrapolation (dB)= 40log (300 meter/30 meter) = +80dB</p> <p>Extrapolation (dB)= 40log (30 meter/30 meter) = +40dB</p>	Frequency range	Limits (detector)	5-30 MHz	69.5 dB $\mu$ V/m (QP)	30-88 MHz	40 dB $\mu$ V/m (QP)	88-216 MHz	43.5 dB $\mu$ V/m (QP)	216-960 MHz	46 dB $\mu$ V/m (QP)	960-1000 MHz	54 dB $\mu$ V/m (QP)	Frequency	Limits (detector)	433,9 MHz	80.8 dB $\mu$ V/m (AVG)	Spurious emission	60.8 dB $\mu$ V/m (AVG)
Frequency range	Limits (detector)																		
5-30 MHz	69.5 dB $\mu$ V/m (QP)																		
30-88 MHz	40 dB $\mu$ V/m (QP)																		
88-216 MHz	43.5 dB $\mu$ V/m (QP)																		
216-960 MHz	46 dB $\mu$ V/m (QP)																		
960-1000 MHz	54 dB $\mu$ V/m (QP)																		
Frequency	Limits (detector)																		
433,9 MHz	80.8 dB $\mu$ V/m (AVG)																		
Spurious emission	60.8 dB $\mu$ V/m (AVG)																		
<b>Test procedure:</b>	Measurements are performed with horizontal and vertical polarization of Loop, biconical and log-periodic antennas. The antenna was positioned between 1 and 4 meters high. EUT1 was located on a turntable, the turntable was rotated fully from 0° to 360°. It was recorded the highest level of the electromagnetic radiation disturbance at each frequency.																		
<b>Test set-up:</b>	ANSI C63.4(2009) See par. 4.2 and annex 4 of this test report. The measures shown in annexes listed below were obtained considering the correction factors of cables and antennas used for the test.																		
<b>Measurement Uncertainty:</b>	5.2 dB.																		
<b>Test results:</b>	<b>PASS</b> The radiated emissions from the EUT was conducted with PK detector. Because the field strength of emission from intentional radiator is over the limits, it was necessary an investigations with AVG detector, applying 15.231 (b) exception limits. The performed measurements are showed in the annexes: 5. BH: measurement with PK detector in the range 30-216MHz; 6. BV: measurement with PK detector in the range 30-216MHz; 7. LH measurement with PK detector in the range 216-1000 MHz; 8. LV measurement with PK detector in the range 216-1000 MHz; 9. LV measurement with AVG detector in the range 433.5-434.4 MHz; 10. LH measurement with AVG detector in the range 433.5-434.4 MHz; 11. LH measurement with AVG detector in the range 867.5-868.5 MHz;																		



Tecnolab del Lago Maggiore S.r.l.  
ISTITUTO DI PROVE, MISURE E RICERCHE, ING. MICHELE SETARO  
Via dell'Industria, 20  
28924 Verbania Fondotoce (VB) – Italy

## TEST REPORT RP010811

### EMC test for FCC Certification procedure on remote controller VT2

2011/05/19

Page 7 di 23

	<p>12. LV measurement with AVG detector in the range 867.3-868.1 MHz;      13. HH measurement with AVG detector in the range 1000-5000 MHz;      14. HV measurement with AVG detector in the range 1000-5000 MHz;</p> <p>Transmitter activated manually      Duty cycle factor (dB) = <math>20 \log (37.5\text{ms}/100\text{ms}) = -8.5 \text{ dB}</math>      For fundamental: highest peak value = 77.9 dBuV/m    Average value: 77.9 -8.5 = 69.4 dBuV/m &lt; 80.8 dBuV/m (reference limit for fundamental)      For spurious emission: highest peak value = 51.9 dBuV/m    Average value: 51.9 -8.5 = 43.4 dBuV/m &lt; 60.8 dBuV/m (reference limit for spurious emission)</p> <p>The radiated emissions are under reference limits.</p>
--	---

#### Test instrumentation:

code	type	mark	model	Calibration until
STRIC001	EMI receiver	Hewlett-Packard	8542E	29/03/2012
STANT019	log-periodic antenna	Emco	3148	04/01/2013
STANT020	biconical antenna	Emco	3110B	09/08/2011
STANT023	Horn antena	SCHAFFNER	BBHA9120D	04/01/2013
STANT009	Loop Antenna	EMCO	6507	19/10/2013
STCAM001	semi-anechoic chamber	Panashield-TDK-Protecn	-	-

### 6.3 Occupied bandwidth

<b>Date:</b>	2011/03/24
<b>Environmental condition:</b>	Temperature= 18-25 °C – Humidity= 30-50%
<b>Applicable Standard:</b>	47 CFR 15.231(c)
<b>Test levels/Limits:</b>	The bandwidth of the emission shall be no wider than 0,25% of the center frequency for device operating above 70 MHz and under 900 MHz: Frequency: 433.9 MHz. Maximum Bandwidth allow at -20dB: 1,08 MHZ
<b>Test procedure:</b>	Measured performed at 3m.
<b>Test set-up:</b>	ANSI C63.4
<b>Measurement Uncertainty:</b>	<1.5 dB.
<b>Test results:</b>	<b>PASS</b>
	The performed measure is shown in annex: 15. L: measurement with PK detector in the range 432.9-434.9 MHz; Maximum Bandwidth measured at -20dB: 0.555 MHZ

#### Test instrumentation:

code	type	mark	model	Calibration until
STRIC016	EMC Analyzer	Hewlett-Packard	E7405A	11/11/2013
STANT019	log-periodic antenna	Emco	3148	04/01/2013
STCAM001	Semi-anechoic chamber	Panashield-TDK-Protecn	-	-



**Tecnolab del Lago Maggiore S.r.l.**  
ISTITUTO DI PROVE, MISURE E RICERCHE, ING. MICHELE SETARO  
Via dell'Industria, 20  
28924 Verbania Fondotoce (VB) – Italy

**TEST REPORT RP010811**

**EMC test for FCC Certification procedure on  
remote controller VT2**

2011/05/19


Page 8 di 23


**7. ANNEXES**

Nr.	Description
1	External view description
2-3	Internal view description
4	Radiated emission set-up
5-14	Radiated emission results
15	Occupied bandwidth

VT2USA



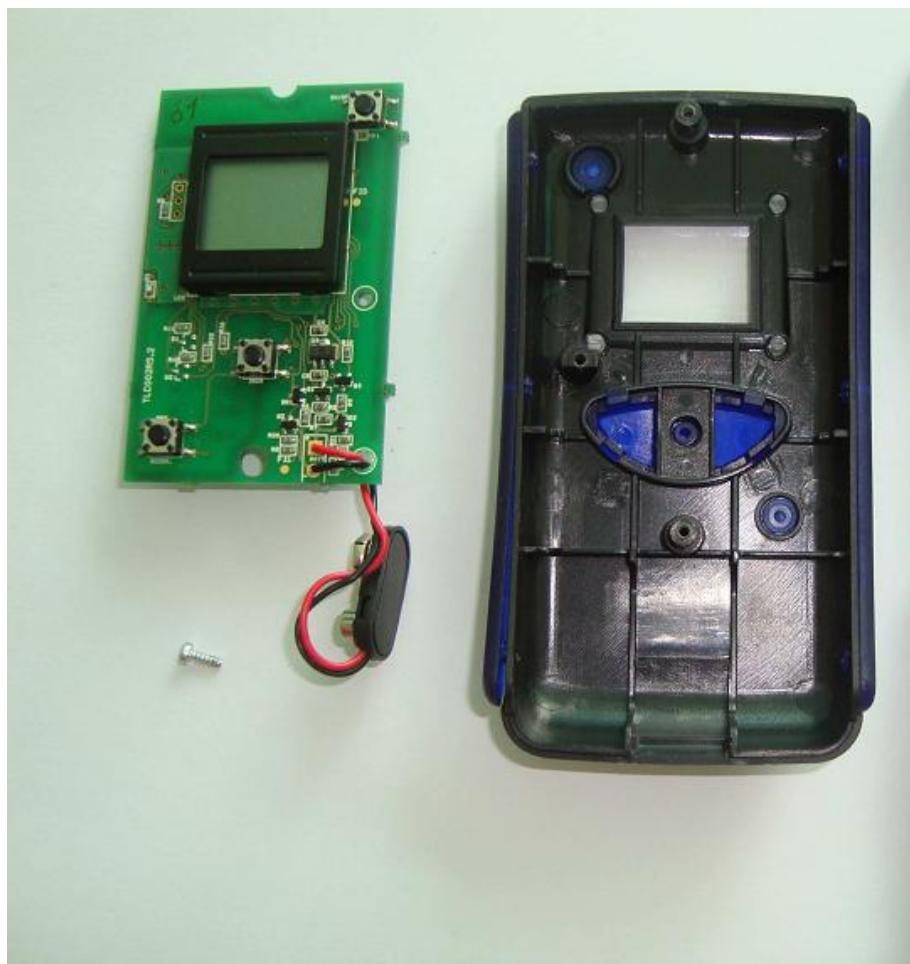

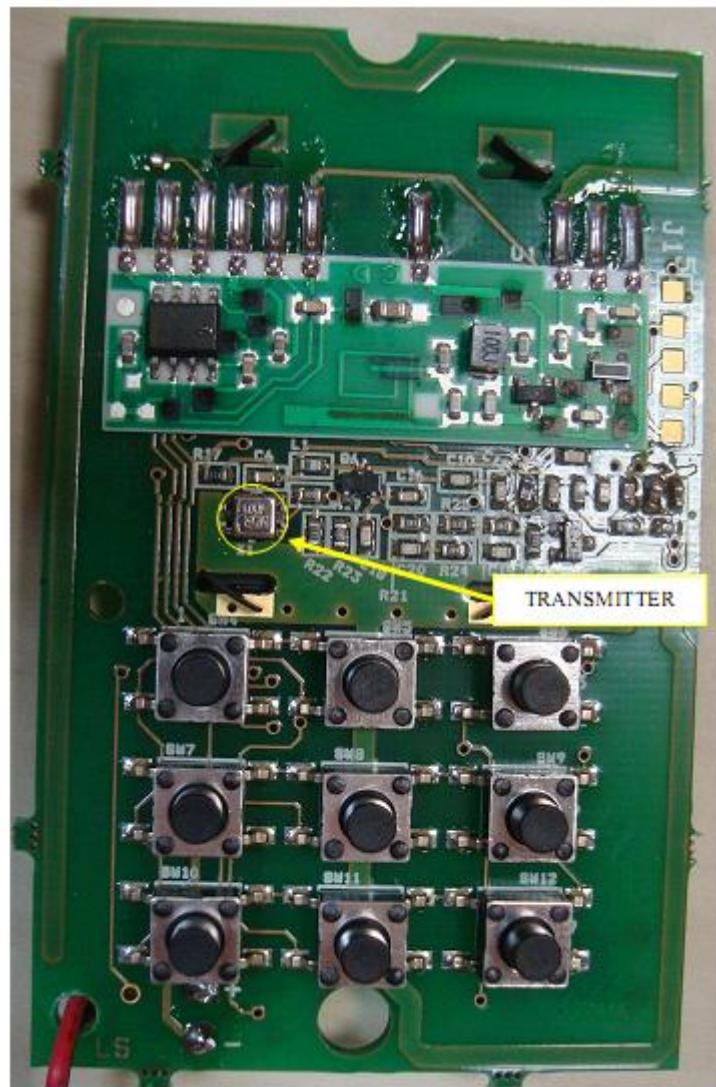



30-216 MHz




216-1000 MHz



1000-5000 MHz


 12:22:32 MAR 23, 2011 Telec.BLU S2 1,5m H F01

ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 191.4 MHz  
25.02 dB $\mu$ V/m

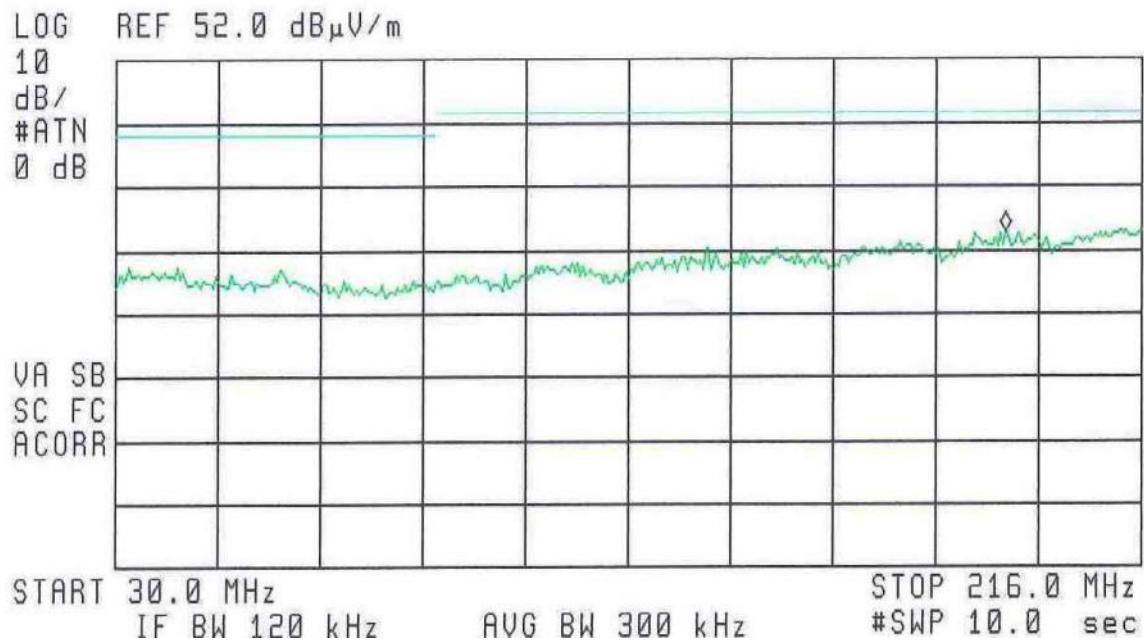


12:23:42 MAR 23, 2011 Telec.BLU S2 1,5m V F02

ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 211.8 MHz  
25.94 dB $\mu$ V/m

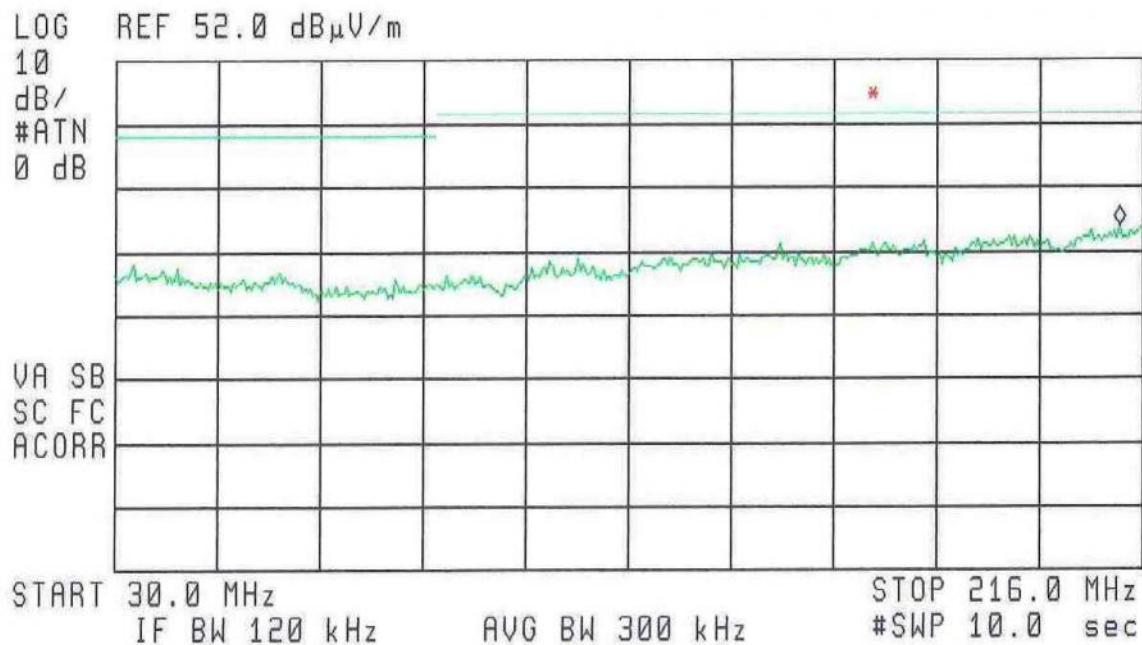


 12:31:43 MAR 23, 2011 Telec.BLU S2 1,5m H F03

ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 437.5 MHz  
78.58 dB $\mu$ V/m

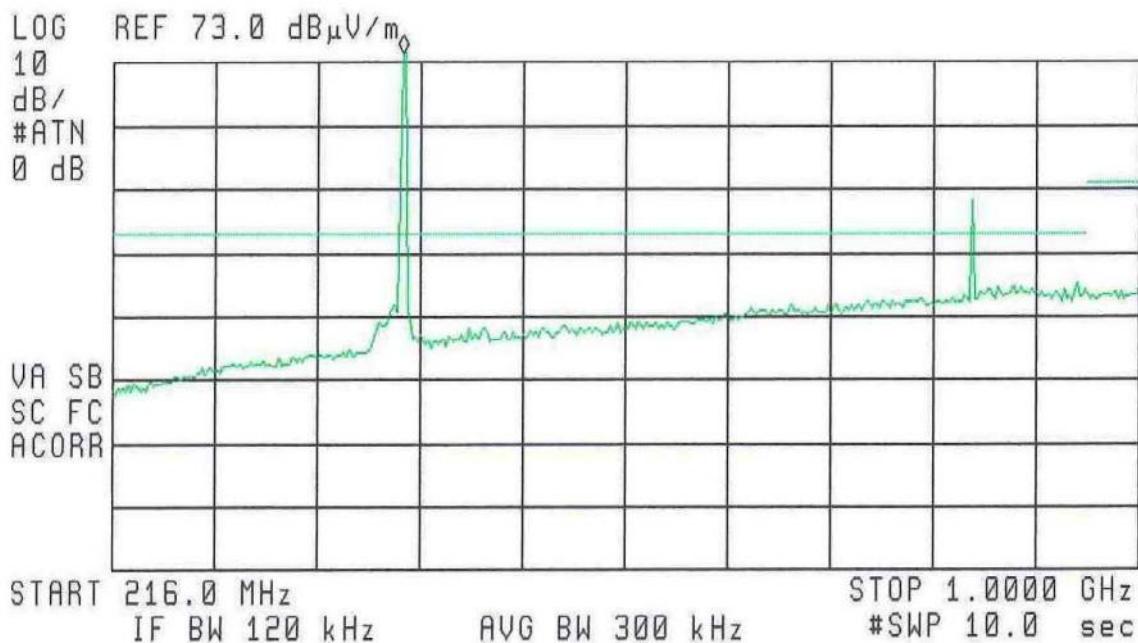


**[hp]** 12:34:08 MAR 23, 2011 Telec.BLU S2 1,5m V F04


ACTV DET: PEAK  
MEAS DET: PEAK QP AVG  
MKR 437.5 MHz  
74.07 dB $\mu$ V/m

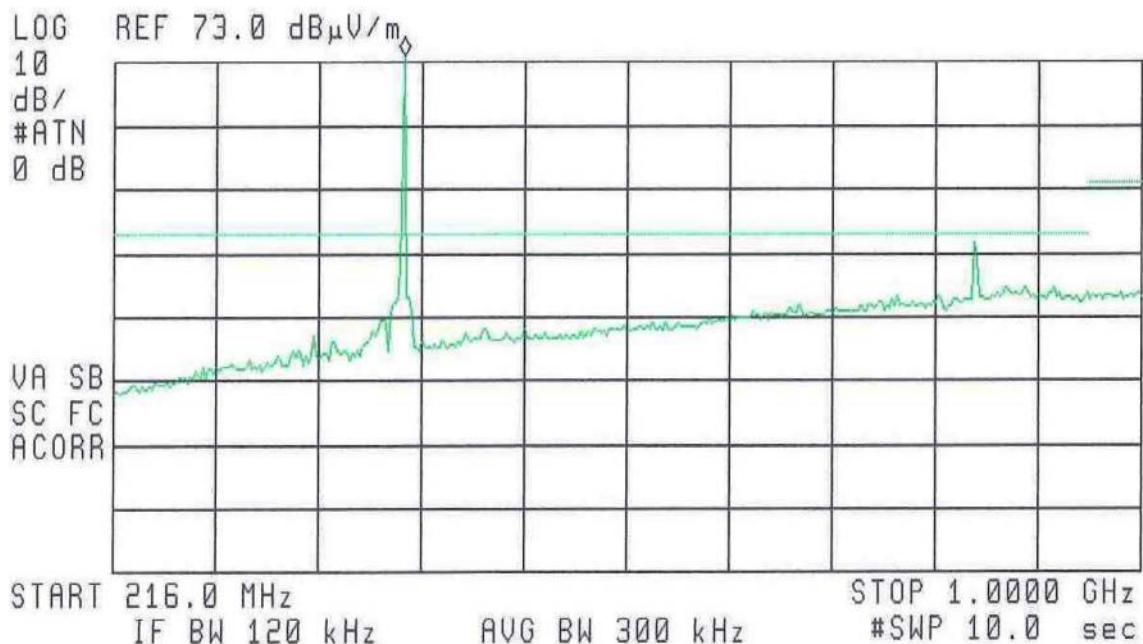

 12:40:31 MAR 23, 2011 Telec.BLU S2 1,5m V F05

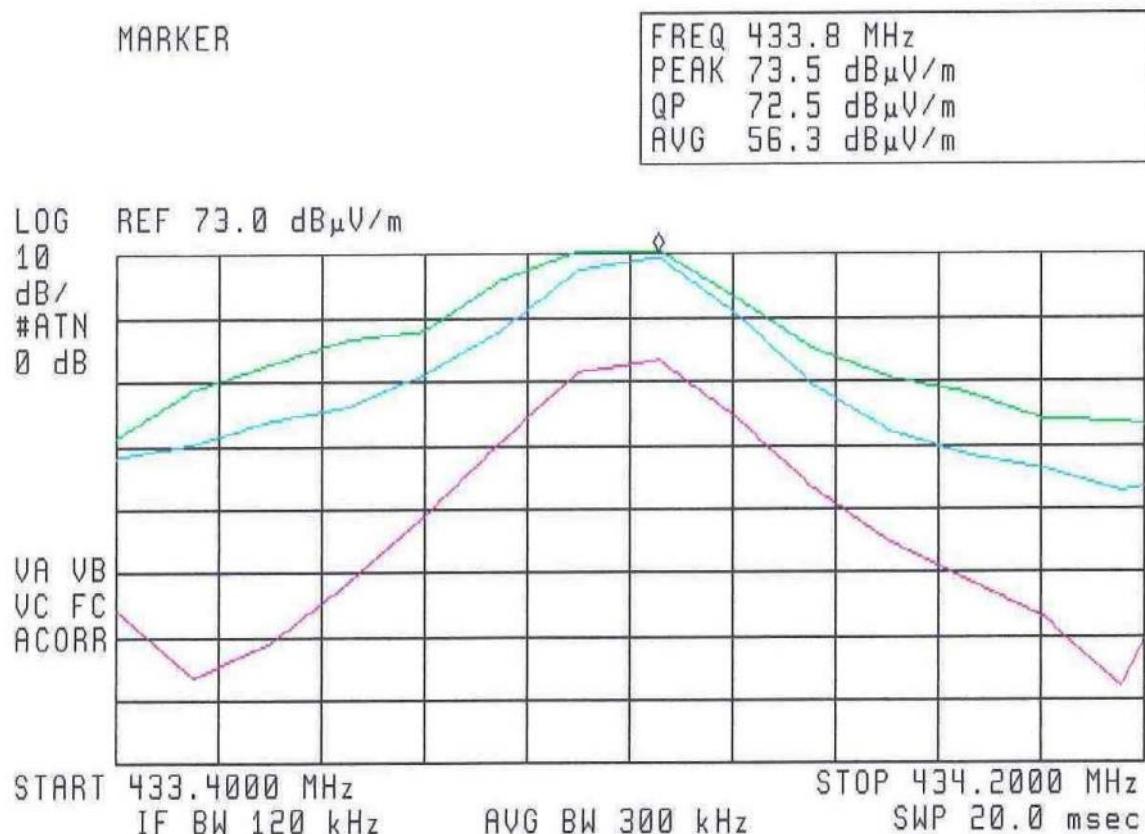


12:46:23 MAR 23, 2011 Telec.BLU S2 1,5m H F06

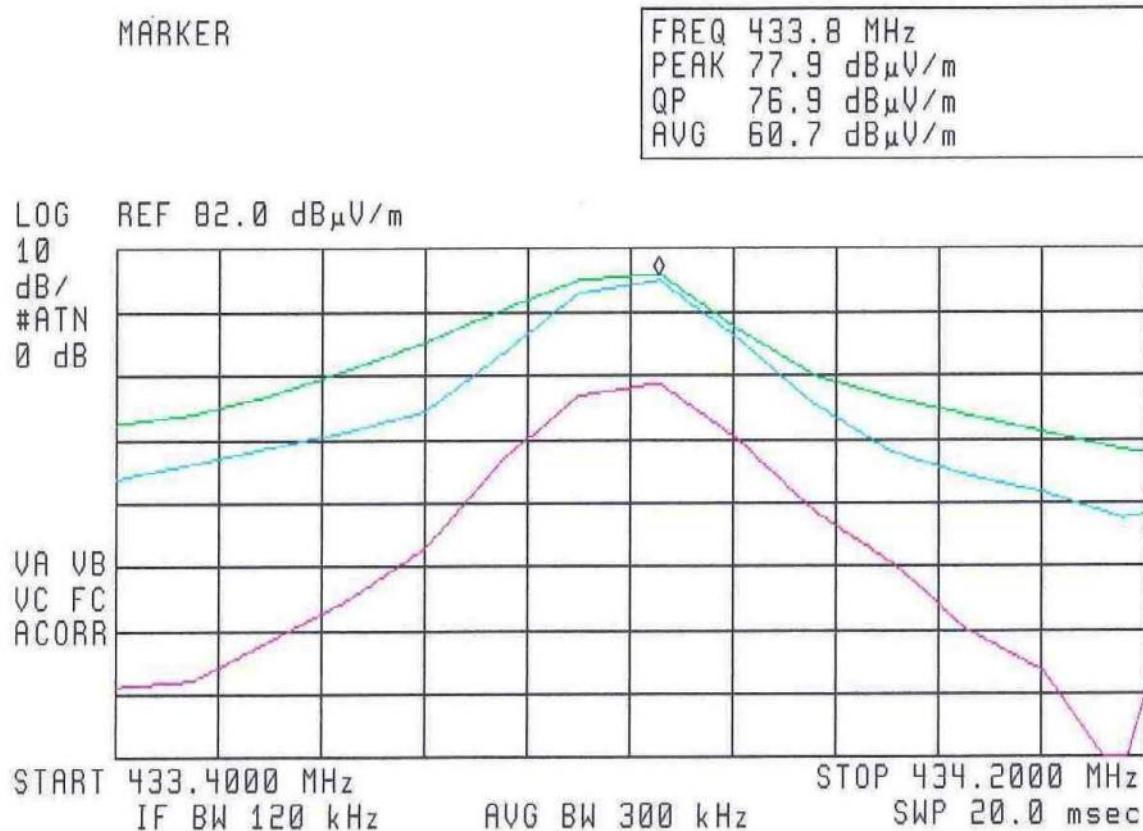

**hp** 12:59:27 MAR 23, 2011 Telec.BLU S2 1,5m H F07

MARKER

FREQ	867.6	MHz
PEAK	51.9	dB $\mu$ V/m
QP	49.8	dB $\mu$ V/m
Avg	34.7	dB $\mu$ V/m

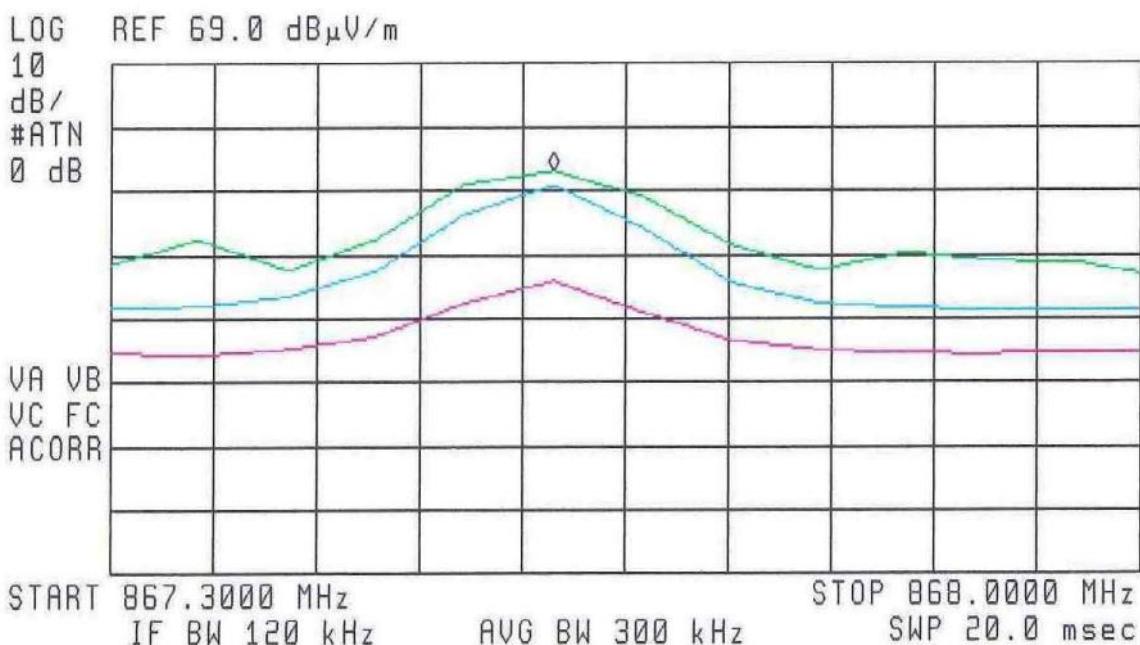

 12:56:07 MAR 23, 2011 Telec.BLU S2 1,5m V F08

MARKER


FREQ	867.6	MHz
PEAK	45.2	dB $\mu$ V/m
QP	41.7	dB $\mu$ V/m
AVG	29.2	dB $\mu$ V/m

LOG REF 69.0 dB $\mu$ V/m


10  
dB/  
#ATN  
0 dB


VA  
VB  
VC  
FC  
ACORR

START 867.3000 MHz IF BW 120 kHz AVG BW 300 kHz STOP 868.0000 MHz SWP 20.0 msec

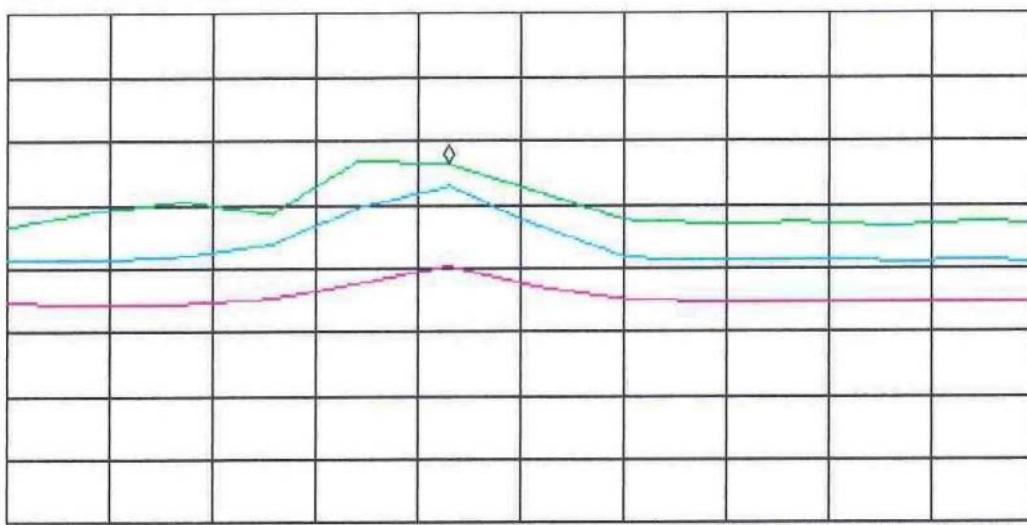



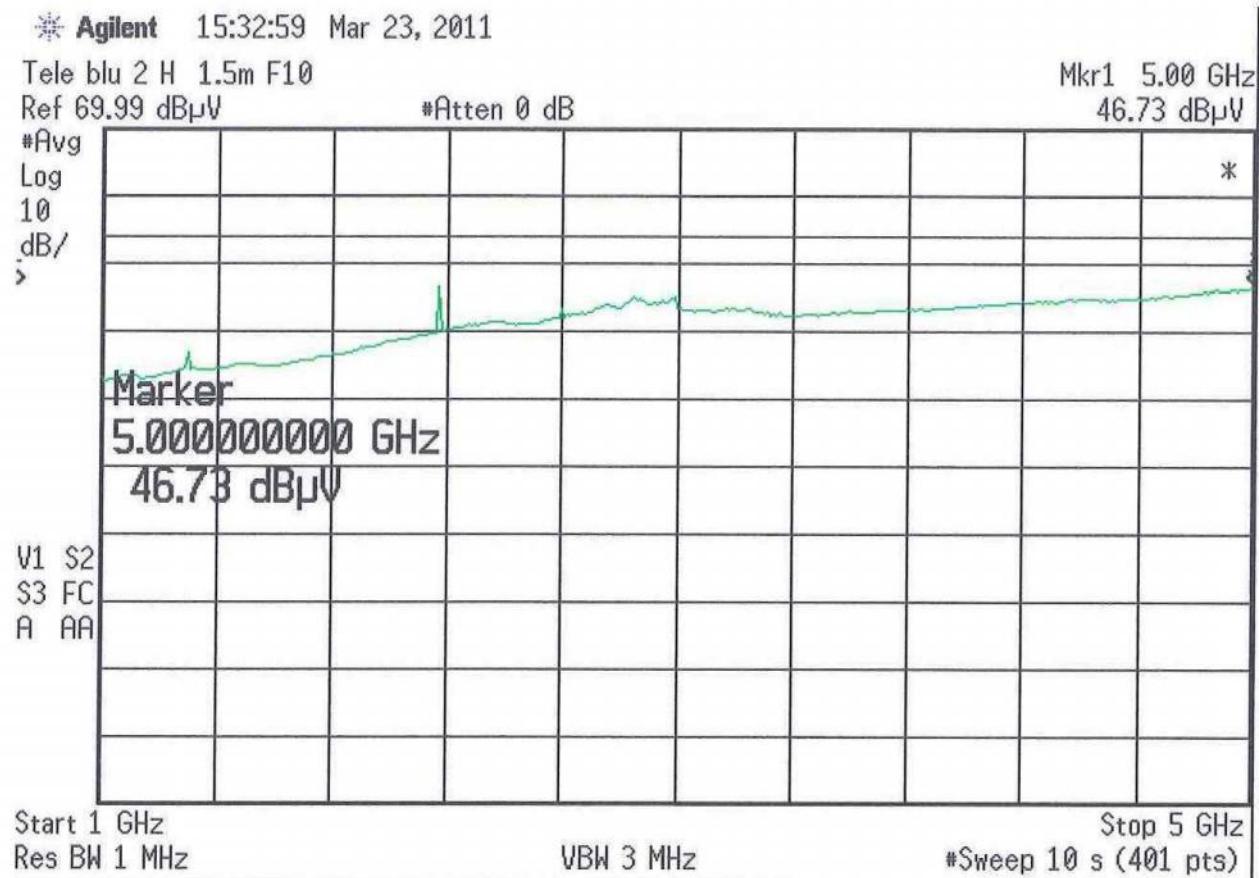

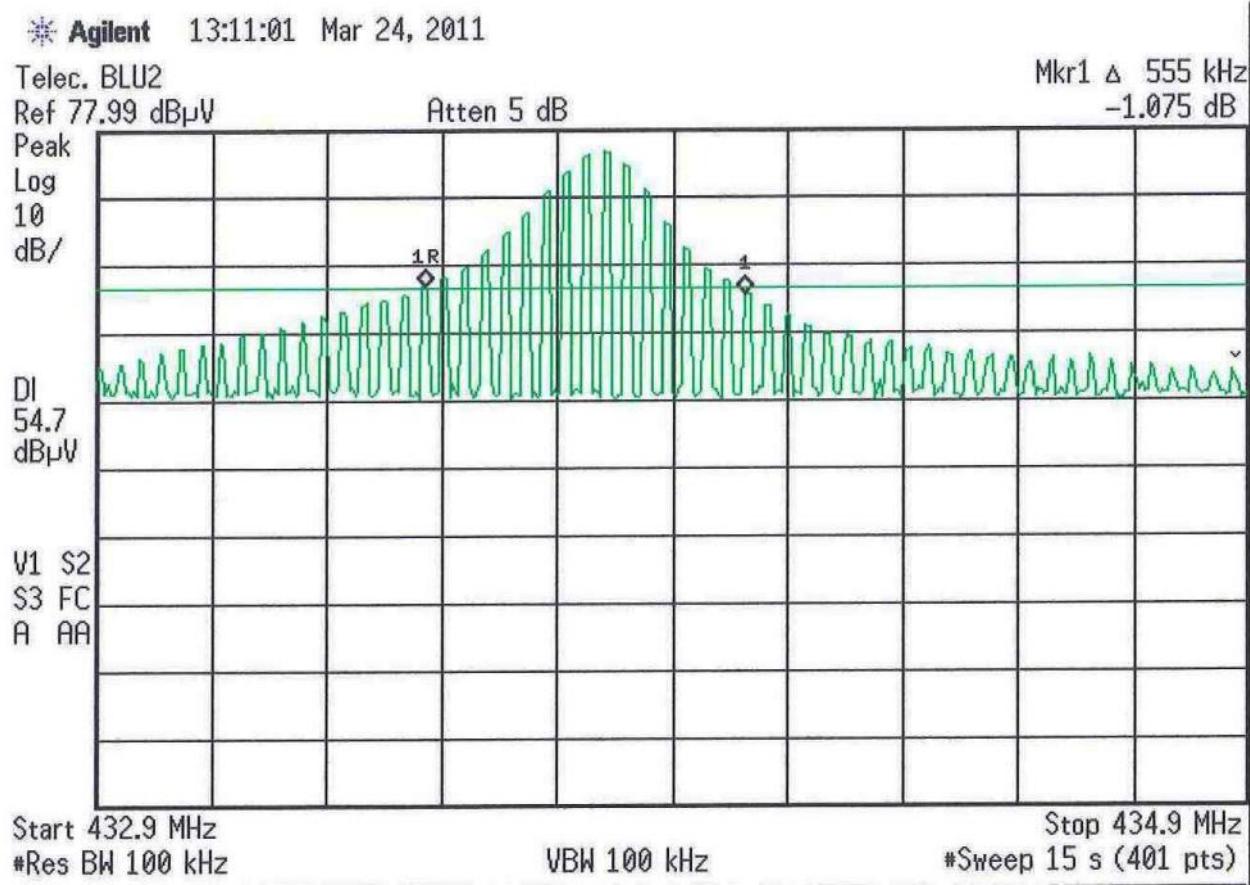

-----END OF TEST REPORT RP010811-----