

FCC RF Test Report

APPLICANT : Fibocom Wireless Inc.
EQUIPMENT : 5G Module
BRAND NAME : Fibocom
MODEL NAME : FG370-NA
FCC ID : ZMOFG370NA
STANDARD : 47 CFR Part 2, Part 27 Subpart Q
CLASSIFICATION : PCS Licensed Transmitter (PCB)
TEST DATE(S) : Jan. 16, 2024 ~ Apr. 28, 2024

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China

TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	6
1.6 Maximum Conducted Power and Emission Designator	6
1.7 Testing Site.....	8
1.8 Test Software.....	9
1.9 Applied Standards	9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	10
2.1 Test Mode.....	10
2.2 Connection Diagram of Test System.....	11
2.3 Support Unit used in test configuration and system	11
2.4 Measurement Results Explanation Example.....	11
2.5 Frequency List of Low/Middle/High Channels	12
3 CONDUCTED TEST ITEMS	14
3.1 Measuring Instruments	14
3.2 Test Setup	14
3.3 Test Result of Conducted Test	14
3.4 Conducted Output Power Measurement	15
3.5 Peak-to-Average Ratio	16
3.6 EIRP	17
3.7 Occupied Bandwidth.....	18
3.8 Conducted Band Edge Measurement	19
3.9 Conducted Spurious Emission Measurement	20
3.10 Frequency Stability Measurement.....	21
4 RADIATED TEST ITEMS	22
4.1 Measuring Instruments	22
4.2 Test Setup	22
4.3 Test Result of Radiated Test	23
4.4 Radiated Spurious Emission Measurement	24
5 LIST OF MEASURING EQUIPMENT	25
6 MEASUREMENT UNCERTAINTY	26
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG3D1101S	Rev. 01	Initial issue of report	May 13, 2024

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	—	Report Only	-
3.5	§27.50 (k)(4)	Peak-to-Average Ratio	<13dB	PASS	
3.6	§27.50 (k)(3)	EIRP	EIRP < 1W (30dBm)	PASS	-
3.7	§2.1049	Occupied Bandwidth	—	Report Only	-
3.8	§2.1051 §27.53 (n)(2)	Conducted Band Edge Measurement	-13dBm/MHz	PASS	-
3.9	§2.1051 §27.53 (n)(2)	Conducted Spurious Emission	-13dBm/MHz	PASS	-
3.10	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Within the band	PASS	-
4.4	§2.1053 §27.53 (n)(2)	Radiated Spurious Emission	-13dBm/MHz	PASS	Under limit 9.92 dB at 4611.000 MHz

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

1 General Description

1.1 Applicant

Fibocom Wireless Inc.

1101, Tower A, Building 6, Shenzhen International Innovation Valley, Dashi 1st Rd, Nanshan,,Shenzhen, China

1.2 Manufacturer

Fibocom Wireless Inc.

1101, Tower A, Building 6, Shenzhen International Innovation Valley, Dashi 1st Rd, Nanshan,,Shenzhen, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	5G Module
Brand Name	Fibocom
Model Name	FG370-NA
FCC ID	ZMOFG370NA
IMEI Code	Conducted: 864952060076756 Radiation: 864952060020580
HW Version	V1.0
SW Version	81140.7000.00.11.01.14
EUT Stage	Production Unit

1.4 Product Specification of Equipment Under Test

Product Feature	
Tx/Rx Frequency	5G NR n77: 3450 MHz ~ 3550 MHz 5G NR n78: 3450 MHz ~ 3550 MHz
SCS	15kHz, 30kHz
Bandwidth	n77(15kHz): 10 / 15 / 20 / 25 / 30 / 40 / 50MHz n77(30kHz): 10 / 15 / 20 / 25 / 30 / 40 / 50 / 60 / 70 / 80 / 90 / 100MHz n78(15kHz): 10 / 15 / 20 / 25 / 30 / 40 / 50MHz n78(30kHz): 10 / 15 / 20 / 25 / 30 / 40 / 50 / 60 / 70 / 80 / 90 / 100MHz
Antenna Gain	<Ant. 3> 5G NR n77: -4.5 dBi 5G NR n78: -4.5 dBi <Ant. 5> 5G NR n77: -4.5 dBi 5G NR n78: -4.5 dBi <Ant. 1> 5G NR n77: -4.5 dBi 5G NR n78: -4.5 dBi <Ant. 6>

	5G NR n77: -4.5 dBi 5G NR n78: -4.5 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark:

1. The maximum Conducted Power is calculated from max output power and max antenna gain, only the maximum Conducted Power is shown in the report, 5G NR n77/n78 for Antenna 3 and UL MIMO for Ant.(3+5).
2. The device supports n77/n78(1T4R) SRS resources on Ant.1/3/5/6, only the test data of worst Ant.3 is showed in the report according to the maximum power.
3. 5G NR n77/n78 support UL MIMO mode is correlated, the n77/n78 MIMO Antenna gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2]$. The conducted BE/Spurious are tested at single antenna port and add $10 \cdot \log(N_{ANT})$ according to KDB 662911 D01.
4. 5G NR n77/n78 support SA and NSA mode. The whole testing has assessed SA mode by referring to the higher conducted power.
5. The device supports HPUE mode for 5G NR n77/n78 and PC1.5 for 5G NR n77 UL MIMO.
6. All the supported EN-DC combinations are verified conducted power, only the EN-DC combination with highest power are shown in the report.
7. The EN-DC mode combination could be referred to the product spec.
8. There are two paths, one path for SA and other path for NSA, the two paths are same RF components thus RF only verify the power for two paths, and full test the path with maximum power.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum Conducted Power and Emission Designator

5G NR n77 SCS 15kHz		PI/2 BPSK / QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum Conducted Power(W)	Emission Designator (99%OBW)	Maximum Conducted Power(W)	Emission Designator (99%OBW)
10	3455.01 ~ 3544.995	0.8851	9M29G7D	0.6982	9M30W7D
15	3457.50 ~ 3542.49	0.8810	14M1G7D	0.6918	14M1W7D
20	3460.005 ~ 3540.00	0.8933	18M9G7D	0.6998	19M0W7D
25	3462.51 ~ 3537.495	0.8730	23M8G7D	0.7870	23M8W7D
30	3465.00 ~ 3534.99	0.8954	28M7G7D	0.6950	28M6W7D
40	3470.01 ~ 3529.995	0.8933	38M7G7D	0.6823	38M6W7D
50	3475.005 ~ 3525.00	0.9036	48M2G7D	0.7063	48M3W7D

5G NR n77 SCS 30kHz		PI/2 BPSK / QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum Conducted Power(W)	Emission Designator (99%OBW)	Maximum Conducted Power(W)	Emission Designator (99%OBW)
10	3455.01 ~ 3544.98	0.8892	8M59G7D	0.7211	8M60W7D
15	3457.50 ~ 3542.49	0.8892	13M6G7D	0.7194	13M6W7D
20	3460.02 ~ 3540.00	0.8954	18M2G7D	0.7228	18M2W7D
25	3462.51 ~ 3537.48	0.8472	23M2G7D	0.7998	23M3W7D
30	3465.00 ~ 3534.99	0.8472	27M9G7D	0.6516	27M9W7D
40	3470.01 ~ 3529.98	0.8892	37M9G7D	0.7261	37M9W7D
50	3475.02 ~ 3525.00	0.8710	47M6G7D	0.6808	47M6W7D
60	3480.00 ~ 3519.99	0.8913	58M0G7D	0.7031	58M0W7D
70	3485.01 ~ 3514.98	0.8730	67M6G7D	0.6792	67M7W7D
80	3490.02 ~ 3510.00	0.8851	77M6G7D	0.6950	77M7W7D
90	3495.00 ~ 3504.99	0.8872	87M6G7D	0.6982	87M5W7D
100	3500.01	0.8974	97M5G7D	0.7161	97M5W7D

5G NR n78 SCS 15kHz		PI/2 BPSK / QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum Conducted Power(W)	Emission Designator (99%OBW)	Maximum Conducted Power(W)	Emission Designator (99%OBW)
10	3455.01 ~ 3544.995	0.4477	9M29G7D	0.3420	9M30W7D
15	3457.50 ~ 3542.49	0.4436	14M1G7D	0.3475	14M1W7D
20	3460.005 ~ 3540.00	0.4508	18M9G7D	0.3436	19M0W7D
25	3462.51 ~ 3537.495	0.4446	23M8G7D	0.3516	23M8W7D
30	3465.00 ~ 3534.99	0.4446	28M7G7D	0.3524	28M6W7D
40	3470.01 ~ 3529.995	0.4467	38M7G7D	0.3540	38M6W7D
50	3475.005 ~ 3525.00	0.4529	48M2G7D	0.3581	48M3W7D

5G NR n78 SCS 30kHz		PI/2 BPSK / QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum Conducted Power(W)	Emission Designator (99%OBW)	Maximum Conducted Power(W)	Emission Designator (99%OBW)
10	3455.01 ~ 3544.98	0.4395	8M59G7D	0.3412	8M60W7D
15	3457.50 ~ 3542.49	0.4436	13M6G7D	0.3467	13M6W7D
20	3460.02 ~ 3540.00	0.4457	18M2G7D	0.3491	18M2W7D
25	3462.51 ~ 3537.48	0.4508	23M2G7D	0.3758	23M3W7D
30	3465.00 ~ 3534.99	0.3656	27M9G7D	0.3548	27M9W7D
40	3470.01 ~ 3529.98	0.4467	37M9G7D	0.3589	37M9W7D
50	3475.02 ~ 3525.00	0.4345	47M6G7D	0.3451	47M6W7D
60	3480.00 ~ 3519.99	0.4395	58M0G7D	0.3499	58M0W7D
70	3485.01 ~ 3514.98	0.4345	67M6G7D	0.3459	67M7W7D
80	3490.02 ~ 3510.00	0.4355	77M6G7D	0.3459	77M7W7D
90	3495.00 ~ 3504.99	0.4345	87M6G7D	0.3459	87M5W7D
100	3500.01	0.4508	97M5G7D	0.3532	97M5W7D

Note:

1. 5G NR Band n77 overlaps the entire frequency range of Band n78, and n77 power > n78 power, therefore the conducted test results of n77 provided in this report cover n78.
2. All modulations have been tested, and only the worst test results are shown in this section.
3. 5G NR n77/n78 SISO power is lower than MIMO mode, thus not show SISO power here.

1.7 Testing Site

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH01-SZ	CN1256	421272

1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24

1.9 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, Part 27 Subpart Q
- ANSI C63.26-2015
- FCC KDB 971168 Power Meas License Digital Systems D01 v03r01
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.


Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission. (X-Plane)

Test Cases	Band	Bandwidth (MHz)	Modulation	RB #	Test Channel
		eg. 5M, 10M, 15M, 20M	eg. PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	1RB, Partial RB, Full RB	L/M/H
Max. Output Power	5G n77	10M, 15M, 20M, 25M, 30M, 40M, 50M, 60M, 70M, 80M, 90M, 100M	All Modulations	1RB, Partial RB, Full RB	L, M, H
	5G n78	10M, 15M, 20M, 25M, 30M, 40M, 50M, 60M, 70M, 80M, 90M, 100M	All Modulations	1RB, Partial RB, Full RB	L, M, H
Peak-to-Average Ratio	5G n77	20M	PI/2 BPSK, QPSK	Full RB	M
E.I.R.P	5G n77	10M, 15M, 20M, 25M, 30M, 40M, 50M, 60M, 70M, 80M, 90M, 100M	All Modulations	1RB, Partial RB, Full RB	L, M, H
	5G n78	10M, 15M, 20M, 25M, 30M, 40M, 50M, 60M, 70M, 80M, 90M, 100M	All Modulations	1RB, Partial RB, Full RB	L, M, H
26dB and 99% Bandwidth	5G n77	10M, 15M, 20M, 25M, 30M, 40M, 50M, 60M, 70M, 80M, 90M, 100M	All Modulations	Full RB	M
Conducted Band Edge	5G n77	10M, 25M, 50M, 100M	PI/2 BPSK, QPSK	1RB, Full RB	L, H
Conducted Spurious Emission	5G n77	10M, 25M, 50M, 100M	PI/2 BPSK, QPSK	1RB	L, M, H
Frequency Stability	5G n77	20M	QPSK	Full RB	M
Radiated Spurious Emission	5G n77	Worst case from maximum power			M

Note:

- The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.
- Frequency Stability : Normal Voltage = 3.80V ; Low Voltage =3.30V. ; High Voltage =4.40V

2.2 Connection Diagram of Test System

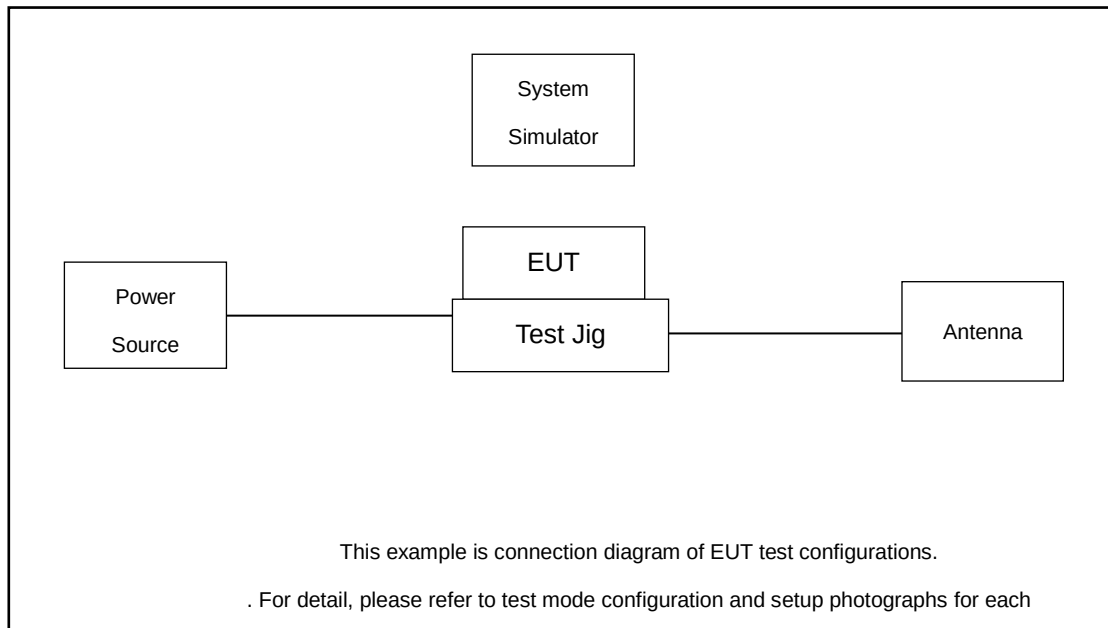

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m
4.	Antenna	N/A	N/A	N/A	N/A	N/A
5.	Adapter	N/A	N/A	N/A	N/A	N/A
6.	Test Jig	N/A	N/A	N/A	N/A	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 8.9 dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 8.9 \text{ (dB)} \end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

5G n77/n78 Channel and Frequency List for SCS 15kHz				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
50	Channel	631667	633334	635000
	Frequency	3475.005	3500.01	3525
40	Channel	631334	633334	635333
	Frequency	3470.01	3500.01	3529.995
30	Channel	631000	633334	635666
	Frequency	3465	3500.01	3534.99
25	Channel	630834	633334	635833
	Frequency	3462.51	3500.01	3537.495
20	Channel	630667	633334	636000
	Frequency	3460.005	3500.01	3540
15	Channel	630500	633334	636166
	Frequency	3457.5	3500.01	3542.49
10	Channel	630334	633334	636333
	Frequency	3455.01	3500.01	3544.995

5G n77/n78 Channel and Frequency List for SCS 30kHz				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	-	633334	-
	Frequency	-	3500.01	-
90	Channel	633000	633334	633666
	Frequency	3495	3500.01	3504.99
80	Channel	632668	633334	634000
	Frequency	3490.02	3500.01	3510
70	Channel	632334	633334	634332
	Frequency	3485.01	3500.01	3514.98
60	Channel	632000	633334	634666
	Frequency	3480	3500.01	3519.99
50	Channel	631668	633334	635000
	Frequency	3475.02	3500.01	3525
40	Channel	631334	633334	635332
	Frequency	3470.01	3500.01	3529.98
30	Channel	631000	633334	635666
	Frequency	3465	3500.01	3534.99
25	Channel	630834	633334	635832
	Frequency	3462.51	3500.01	3537.48
20	Channel	630668	633334	636000
	Frequency	3460.02	3500.01	3540
15	Channel	630500	633334	636166
	Frequency	3457.5	3500.01	3542.49
10	Channel	630334	633334	636332
	Frequency	3455.01	3500.01	3544.98


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

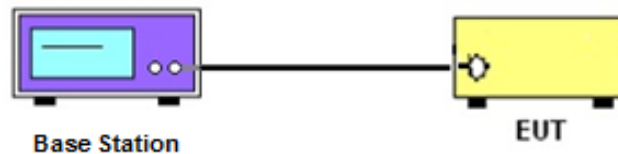

3.2.2 Peak-to-Average Ratio, Occupied / 26dB Bandwidth, Band-Edge and Conducted Spurious Emission

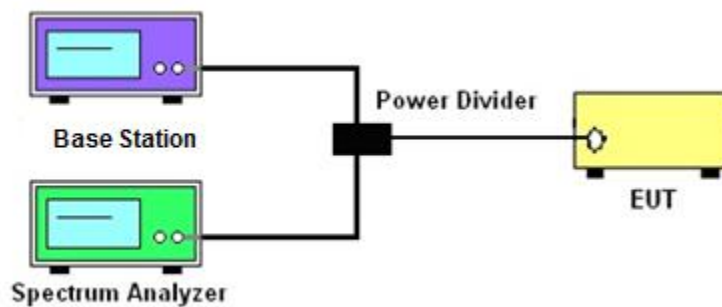

3.2.3 Frequency Stability

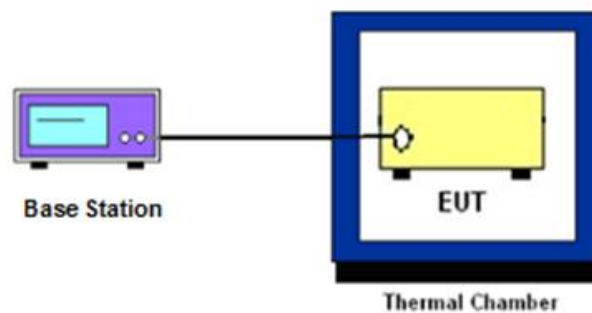

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power Measurement

3.4.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 EIRP

3.6.1 Description of EIRP Limit

§ 27.50 (k)(3)

Mobile devices are limited to 1Watt (30 dBm) EIRP. Mobile devices operating in these bands must employ a means for limiting power to the minimum necessary for successful communications

3.6.2 Test Procedures

1. According to KDB 412172 D01 Power Approach,
2. $EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where
 P_T = transmitter output power in dBm
 G_T = gain of the transmitting antenna in dBi
 L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.7 Occupied Bandwidth

3.7.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.8 Conducted Band Edge Measurement

3.8.1 Description of Conducted Band Edge Measurement

§ 27.53 (n)(2)

For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.

Compliance with this paragraph is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed, but limited to a maximum of 200 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq 1\%$ EBW but limited to a maximum of 200 kHz in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz and 5 MHz removed from the band edge, set RBW ≥ 500 KHz.
6. Beyond the 5 MHz removed from the band edge, set RBW = 1MHz.
7. Set spectrum analyzer with RMS detector.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. Checked that all the results comply with the emission limit line.

3.9 Conducted Spurious Emission Measurement

3.9.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges shall not exceed -13 dBm/MHz.

It is measured by means of a calibrated spectrum analyzer and scanned from 30MHz up to a frequency including its 10th harmonic.

3.9.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. Checked that all the results comply with the emission limit line.

3.10 Frequency Stability Measurement

3.10.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

3.10.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.10.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5.
2. The EUT was placed in a temperature chamber at 20±5°C and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

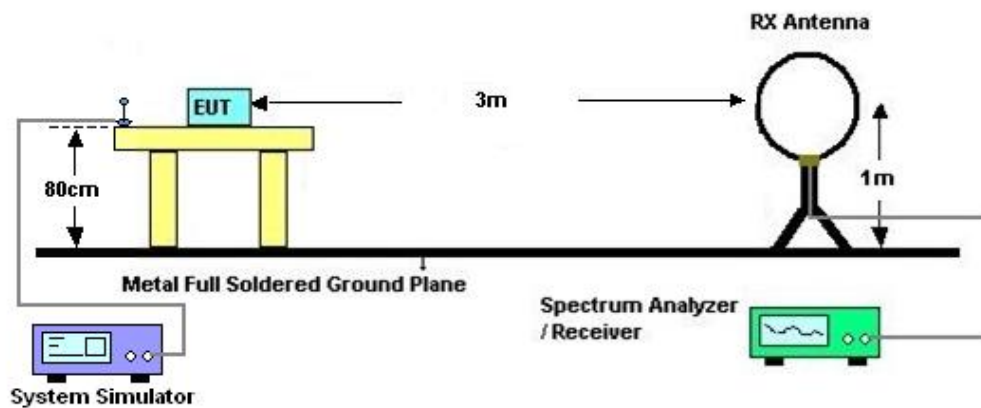

4.2.2 For radiated test from 30MHz to 1GHz

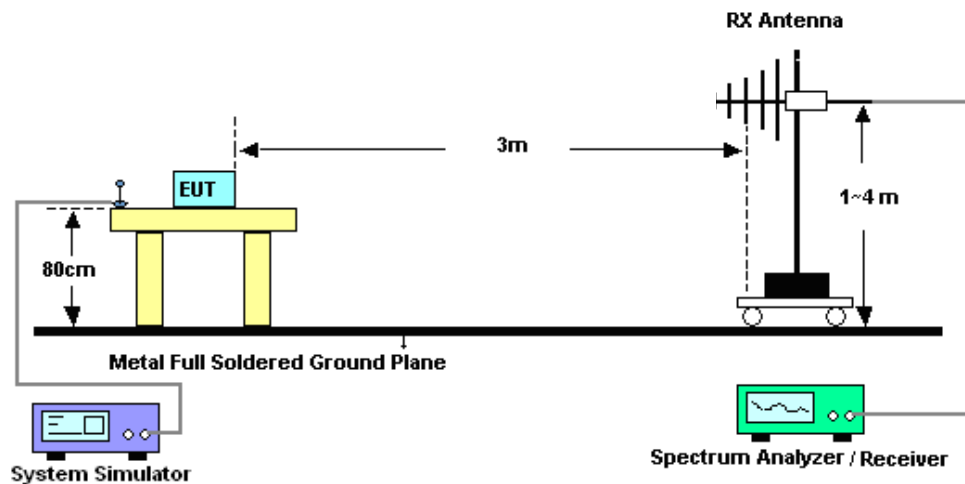

4.2.3 For radiated test above 1GHz

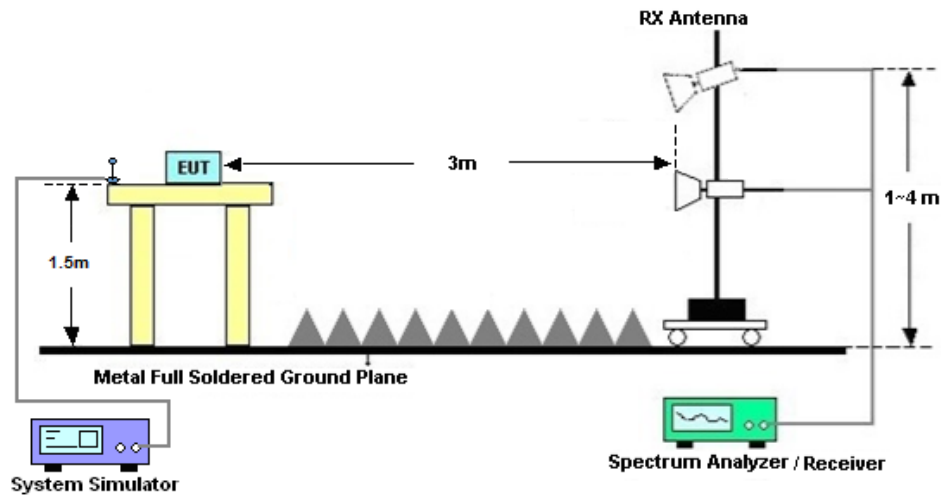

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission Measurement

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI/TIA-603-E. The power of any emission outside of the authorized operating frequency ranges shall not exceed -13 dBm/MHz.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$
$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 07, 2023	Jan. 16, 2024~Apr. 28, 2024	Jul. 06, 2024	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04265	60.06.020.0077	0.4GHz~26.5GHz	Dec. 25, 2023	Jan. 16, 2024~Apr. 28, 2024	Dec. 24, 2024	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhonggroup	LP-150U	H2014081803	-40~+150°C	Jul. 05, 2023	Jan. 16, 2024~Apr. 28, 2024	Jul. 04, 2024	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 27, 2023	Mar. 06, 2024	Dec. 26, 2024	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jul. 28, 2022	Mar. 06, 2024	Jul. 27, 2024	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5GHz	Oct. 18, 2023	Mar. 06, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Oct. 24, 2023	Mar. 06, 2024	Oct. 23, 2025	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 08, 2023	Mar. 06, 2024	Jul. 07, 2024	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 08, 2023	Mar. 06, 2024	Apr. 07, 2024	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 04, 2023	Mar. 06, 2024	Apr. 03, 2024	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 18, 2023	Mar. 06, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 07, 2023	Mar. 06, 2024	Jul. 06, 2024	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	Oct. 18, 2023	Mar. 06, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Mar. 06, 2024	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Mar. 06, 2024	NCR	Radiation (03CH01-SZ)

NCR: No Calibration Required

6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	± 1.34 dB
Occupied Channel Bandwidth	± 0.012 MHz
Conducted Power	± 1.34 dB
Peak to Average Ratio	± 1.34 dB
Frequency Stability	± 1.3 Hz

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.80dB
--	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.48dB
--	--------

Uncertainty of Radiated Emission Measurement (1GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.53dB
--	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.02dB
--	--------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Hank Lin	Temperature :	24~26°C
		Relative Humidity :	50~53%

FR1 N77_SCS 15kHz

Transmitter Conducted Output Power And EIRP, ($G_T - L_C$)=-4.5dB

NR Band	SCS	Band Width	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
77	15	10	630334	3455.01	DFT-s-OFDM QPSK	1@1	25.97	21.47	0.1403
77	15	10	630334	3455.01	DFT-s-OFDM 16 QAM	1@1	25.15	20.65	0.1161
77	15	10	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.89	21.39	0.1377
77	15	10	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	25.04	20.54	0.1132
77	15	10	636333	3544.995	DFT-s-OFDM QPSK	1@1	25.74	21.24	0.1330
77	15	10	636333	3544.995	DFT-s-OFDM 16 QAM	1@1	24.87	20.37	0.1089
77	15	15	630500	3457.5	DFT-s-OFDM QPSK	1@1	26.06	21.56	0.1432
77	15	15	630500	3457.5	DFT-s-OFDM 16 QAM	1@1	25.2	20.7	0.1175
77	15	15	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.94	21.44	0.1393
77	15	15	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	25	20.5	0.1122
77	15	15	636166	3542.49	DFT-s-OFDM QPSK	1@1	25.82	21.32	0.1355
77	15	15	636166	3542.49	DFT-s-OFDM 16 QAM	1@1	24.94	20.44	0.1107
77	15	20	630667	3460.005	DFT-s-OFDM QPSK	1@1	26.04	21.54	0.1426
77	15	20	630667	3460.005	DFT-s-OFDM 16 QAM	1@1	25.21	20.71	0.1178
77	15	20	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.95	21.45	0.1396
77	15	20	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	25.1	20.6	0.1148
77	15	20	636000	3540	DFT-s-OFDM QPSK	1@1	25.89	21.39	0.1377
77	15	20	636000	3540	DFT-s-OFDM 16 QAM	1@1	25.11	20.61	0.1151
77	15	25	630834	3462.51	DFT-s-OFDM QPSK	1@1	26.02	21.52	0.1419
77	15	25	630834	3462.51	DFT-s-OFDM 16 QAM	1@1	25.1	20.6	0.1148
77	15	25	633334	3500.01	DFT-s-OFDM QPSK	1@1	26.03	21.53	0.1422
77	15	25	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	25.88	21.38	0.1374
77	15	25	635833	3537.495	DFT-s-OFDM QPSK	1@1	26.07	21.57	0.1435
77	15	25	635833	3537.495	DFT-s-OFDM 16 QAM	1@1	25.45	20.95	0.1245
77	15	30	631000	3465	DFT-s-OFDM QPSK	1@1	25.88	21.38	0.1374
77	15	30	631000	3465	DFT-s-OFDM 16 QAM	1@1	25.02	20.52	0.1127
77	15	30	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.87	21.37	0.1371
77	15	30	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.96	20.46	0.1112
77	15	30	635666	3534.99	DFT-s-OFDM QPSK	1@1	25.75	21.25	0.1334
77	15	30	635666	3534.99	DFT-s-OFDM 16 QAM	1@1	24.92	20.42	0.1102
77	15	40	631334	3470.01	DFT-s-OFDM QPSK	1@1	25.98	21.48	0.1406
77	15	40	631334	3470.01	DFT-s-OFDM 16 QAM	1@1	25.07	20.57	0.1140
77	15	40	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.87	21.37	0.1371
77	15	40	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.99	20.49	0.1119
77	15	40	635333	3529.995	DFT-s-OFDM QPSK	1@1	25.95	21.45	0.1396
77	15	40	635333	3529.995	DFT-s-OFDM 16 QAM	1@1	24.99	20.49	0.1119
77	15	50	631667	3475.005	DFT-s-OFDM PI/2 BPSK	135@67	25.98	21.48	0.1406
77	15	50	631667	3475.005	DFT-s-OFDM PI/2 BPSK	1@1	26.1	21.6	0.1445
77	15	50	631667	3475.005	DFT-s-OFDM PI/2 BPSK	1@268	25.78	21.28	0.1343
77	15	50	631667	3475.005	DFT-s-OFDM QPSK	135@67	25.96	21.46	0.1400
77	15	50	631667	3475.005	DFT-s-OFDM QPSK	1@1	26.08	21.58	0.1439
77	15	50	631667	3475.005	DFT-s-OFDM QPSK	1@268	25.85	21.35	0.1365

77	15	50	631667	3475.005	DFT-s-OFDM 16 QAM	135@67	25.05	20.55	0.1135
77	15	50	631667	3475.005	DFT-s-OFDM 16 QAM	1@1	25.08	20.58	0.1143
77	15	50	631667	3475.005	DFT-s-OFDM 16 QAM	1@268	24.84	20.34	0.1081
77	15	50	631667	3475.005	DFT-s-OFDM 64 QAM	135@67	23.02	18.52	0.0711
77	15	50	631667	3475.005	DFT-s-OFDM 64 QAM	1@1	23.1	18.6	0.0724
77	15	50	631667	3475.005	DFT-s-OFDM 64 QAM	1@268	22.71	18.21	0.0662
77	15	50	631667	3475.005	DFT-s-OFDM 256 QAM	135@67	20.49	15.99	0.0397
77	15	50	631667	3475.005	DFT-s-OFDM 256 QAM	1@1	20.7	16.2	0.0417
77	15	50	631667	3475.005	DFT-s-OFDM 256 QAM	1@268	20.37	15.87	0.0386
77	15	50	631667	3475.005	CP-OFDM QPSK	135@67	24.49	19.99	0.0998
77	15	50	631667	3475.005	CP-OFDM QPSK	1@1	24.5	20	0.1000
77	15	50	631667	3475.005	CP-OFDM QPSK	1@268	24.37	19.87	0.0971
77	15	50	633334	3500.01	DFT-s-OFDM PI/2 BPSK	135@67	25.95	21.45	0.1396
77	15	50	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	26.02	21.52	0.1419
77	15	50	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@268	25.69	21.19	0.1315
77	15	50	633334	3500.01	DFT-s-OFDM QPSK	135@67	25.97	21.47	0.1403
77	15	50	633334	3500.01	DFT-s-OFDM QPSK	1@1	26.03	21.53	0.1422
77	15	50	633334	3500.01	DFT-s-OFDM QPSK	1@268	25.76	21.26	0.1337
77	15	50	633334	3500.01	DFT-s-OFDM 16 QAM	135@67	25.01	20.51	0.1125
77	15	50	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.97	20.47	0.1114
77	15	50	633334	3500.01	DFT-s-OFDM 16 QAM	1@268	24.73	20.23	0.1054
77	15	50	633334	3500.01	DFT-s-OFDM 64 QAM	135@67	23.01	18.51	0.0710
77	15	50	633334	3500.01	DFT-s-OFDM 64 QAM	1@1	23.01	18.51	0.0710
77	15	50	633334	3500.01	DFT-s-OFDM 64 QAM	1@268	22.64	18.14	0.0652
77	15	50	633334	3500.01	DFT-s-OFDM 256 QAM	135@67	20.51	16.01	0.0399
77	15	50	633334	3500.01	DFT-s-OFDM 256 QAM	1@1	20.58	16.08	0.0406
77	15	50	633334	3500.01	DFT-s-OFDM 256 QAM	1@268	20.22	15.72	0.0373
77	15	50	633334	3500.01	CP-OFDM QPSK	135@67	24.48	19.98	0.0995
77	15	50	633334	3500.01	CP-OFDM QPSK	1@1	24.51	20.01	0.1002
77	15	50	633334	3500.01	CP-OFDM QPSK	1@268	24.29	19.79	0.0953
77	15	50	635000	3525	DFT-s-OFDM PI/2 BPSK	135@67	25.89	21.39	0.1377
77	15	50	635000	3525	DFT-s-OFDM PI/2 BPSK	1@1	26.06	21.56	0.1432
77	15	50	635000	3525	DFT-s-OFDM PI/2 BPSK	1@268	25.57	21.07	0.1279
77	15	50	635000	3525	DFT-s-OFDM QPSK	135@67	25.96	21.46	0.1400
77	15	50	635000	3525	DFT-s-OFDM QPSK	1@1	26.07	21.57	0.1435
77	15	50	635000	3525	DFT-s-OFDM QPSK	1@268	25.59	21.09	0.1285
77	15	50	635000	3525	DFT-s-OFDM 16 QAM	135@67	24.95	20.45	0.1109
77	15	50	635000	3525	DFT-s-OFDM 16 QAM	1@1	25.06	20.56	0.1138
77	15	50	635000	3525	DFT-s-OFDM 16 QAM	1@268	24.65	20.15	0.1035
77	15	50	635000	3525	DFT-s-OFDM 64 QAM	135@67	22.96	18.46	0.0701
77	15	50	635000	3525	DFT-s-OFDM 64 QAM	1@1	22.96	18.46	0.0701
77	15	50	635000	3525	DFT-s-OFDM 64 QAM	1@268	22.52	18.02	0.0634
77	15	50	635000	3525	DFT-s-OFDM 256 QAM	135@67	20.43	15.93	0.0392
77	15	50	635000	3525	DFT-s-OFDM 256 QAM	1@1	20.6	16.1	0.0407
77	15	50	635000	3525	DFT-s-OFDM 256 QAM	1@268	20.17	15.67	0.0369
77	15	50	635000	3525	CP-OFDM QPSK	135@67	24.42	19.92	0.0982
77	15	50	635000	3525	CP-OFDM QPSK	1@1	24.58	20.08	0.1019
77	15	50	635000	3525	CP-OFDM QPSK	1@268	24.26	19.76	0.0946

Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
77	15	20	633334	3500.01	DFT-s-OFDM QPSK	100@0	0.0055	PASS	NV
77	15	20	633334	3500.01	DFT-s-OFDM QPSK	100@0	0.0061	PASS	LV
77	15	20	633334	3500.01	DFT-s-OFDM QPSK	100@0	0.0066	PASS	HV
77	15	20	633334	3500.01	DFT-s-OFDM QPSK	100@0	0.0061	PASS	-30°C
77	15	20	633334	3500.01	DFT-s-OFDM QPSK	100@0	0.0034	PASS	-20°C
77	15	20	633334	3500.01	DFT-s-OFDM QPSK	100@0	0.0041	PASS	-10°C
77	15	20	633334	3500.01	DFT-s-OFDM QPSK	100@0	0.0055	PASS	0°C
77	15	20	633334	3500.01	DFT-s-OFDM QPSK	100@0	0.0045	PASS	10°C
77	15	20	633334	3500.01	DFT-s-OFDM QPSK	100@0	0.0055	PASS	20°C
77	15	20	633334	3500.01	DFT-s-OFDM QPSK	100@0	0.0038	PASS	30°C
77	15	20	633334	3500.01	DFT-s-OFDM QPSK	100@0	0.0032	PASS	40°C
77	15	20	633334	3500.01	DFT-s-OFDM QPSK	100@0	0.0052	PASS	50°C

Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
77	15	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	100@0	4.38	13	PASS
77	15	20	633334	3500.01	DFT-s-OFDM QPSK	100@0	5.55	13	PASS

N77(20M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH




N77(20M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH




Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
77	15	10	633334	3500.01	CP-OFDM QPSK	52@0	9.2907	9.634
77	15	10	633334	3500.01	CP-OFDM 16 QAM	52@0	9.2761	9.737
77	15	10	633334	3500.01	CP-OFDM 64 QAM	52@0	9.2683	9.646
77	15	10	633334	3500.01	CP-OFDM 256 QAM	52@0	9.2724	9.684
77	15	15	633334	3500.01	CP-OFDM QPSK	79@0	14.099	14.63
77	15	15	633334	3500.01	CP-OFDM 16 QAM	79@0	14.135	14.56
77	15	15	633334	3500.01	CP-OFDM 64 QAM	79@0	14.103	14.64
77	15	15	633334	3500.01	CP-OFDM 256 QAM	79@0	14.121	14.61
77	15	20	633334	3500.01	CP-OFDM QPSK	106@0	18.946	19.54
77	15	20	633334	3500.01	CP-OFDM 16 QAM	106@0	18.914	19.63
77	15	20	633334	3500.01	CP-OFDM 64 QAM	106@0	18.886	19.57
77	15	20	633334	3500.01	CP-OFDM 256 QAM	106@0	18.931	19.57
77	15	25	633334	3500.01	CP-OFDM QPSK	133@0	23.78	24.63
77	15	25	633334	3500.01	CP-OFDM 16 QAM	133@0	23.784	24.63
77	15	25	633334	3500.01	CP-OFDM 64 QAM	133@0	23.662	24.6
77	15	25	633334	3500.01	CP-OFDM 256 QAM	133@0	23.739	24.63
77	15	30	633334	3500.01	CP-OFDM QPSK	160@0	28.605	29.5
77	15	30	633334	3500.01	CP-OFDM 16 QAM	160@0	28.512	29.53
77	15	30	633334	3500.01	CP-OFDM 64 QAM	160@0	28.503	29.5
77	15	30	633334	3500.01	CP-OFDM 256 QAM	160@0	28.534	29.59
77	15	40	633334	3500.01	CP-OFDM QPSK	216@0	38.514	39.85
77	15	40	633334	3500.01	CP-OFDM 16 QAM	216@0	38.568	39.78
77	15	40	633334	3500.01	CP-OFDM 64 QAM	216@0	38.579	39.88
77	15	40	633334	3500.01	CP-OFDM 256 QAM	216@0	38.511	39.93
77	15	50	633334	3500.01	CP-OFDM QPSK	270@0	48.051	49.75
77	15	50	633334	3500.01	CP-OFDM 16 QAM	270@0	48.296	49.69
77	15	50	633334	3500.01	CP-OFDM 64 QAM	270@0	48.3	49.73
77	15	50	633334	3500.01	CP-OFDM 256 QAM	270@0	47.963	49.68


N77(10M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

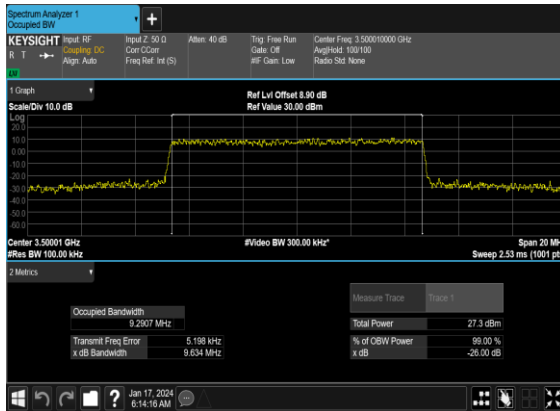


N77(10M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

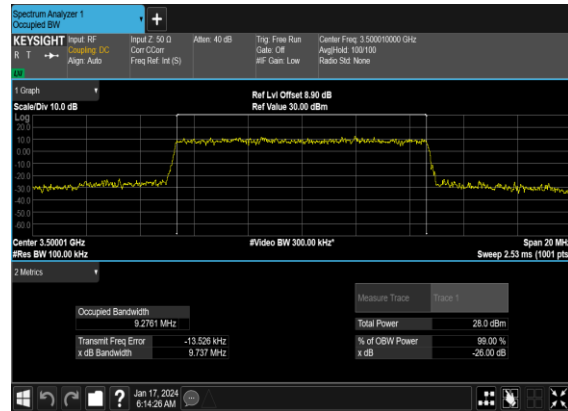


N77(10M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

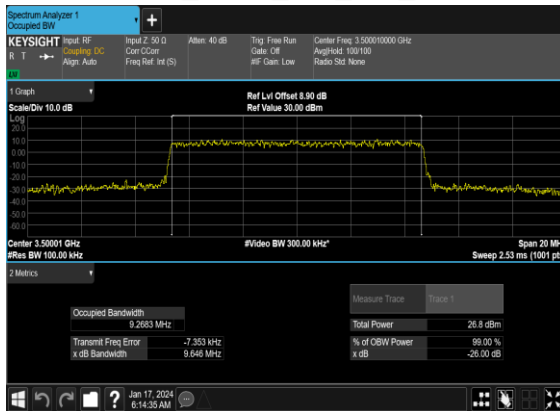


N77(10M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

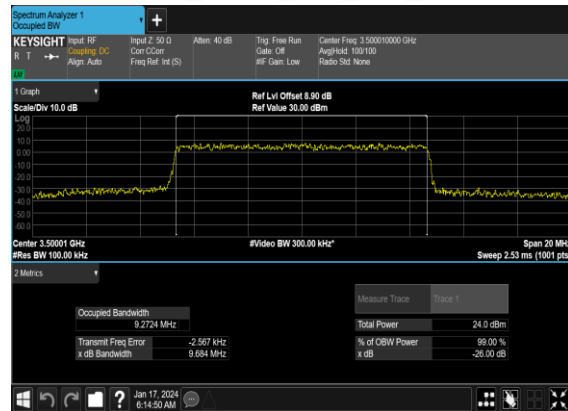


N77(15M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

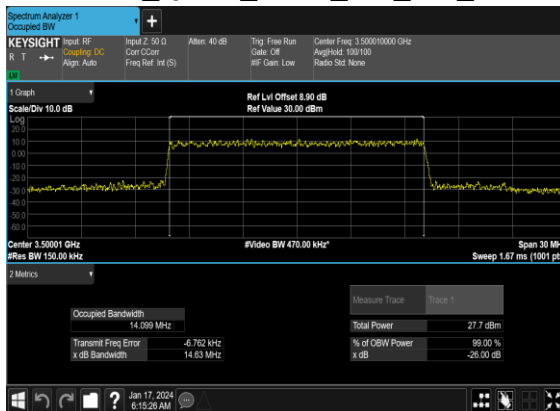

N77(15M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

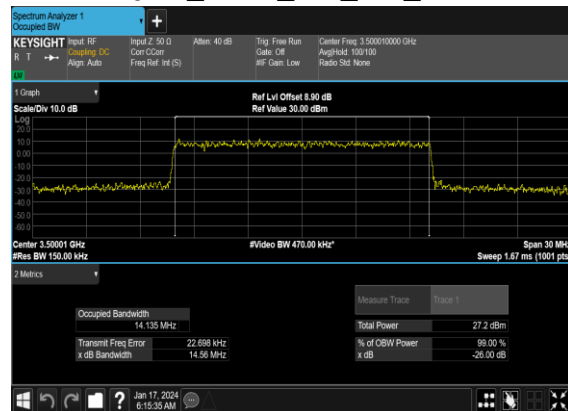

N77(15M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

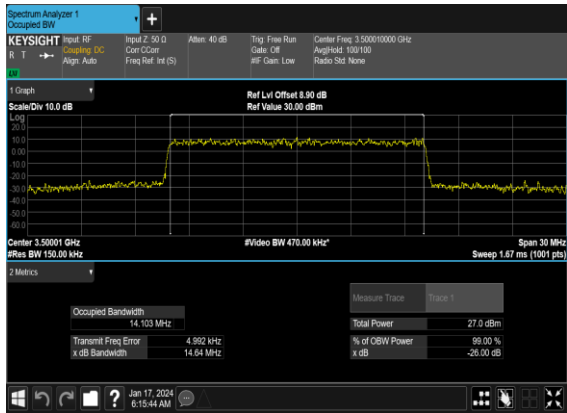


N77(15M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH




N77(20M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH




N77(20M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

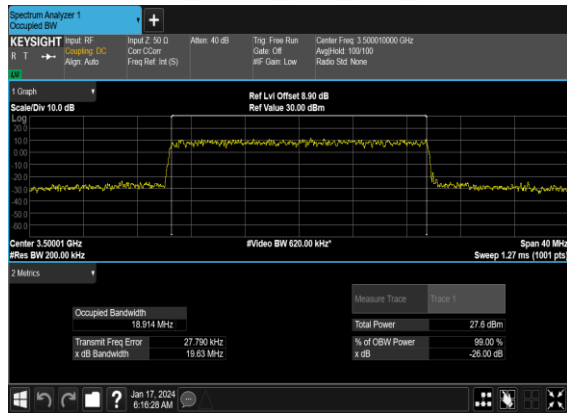


N77(20M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

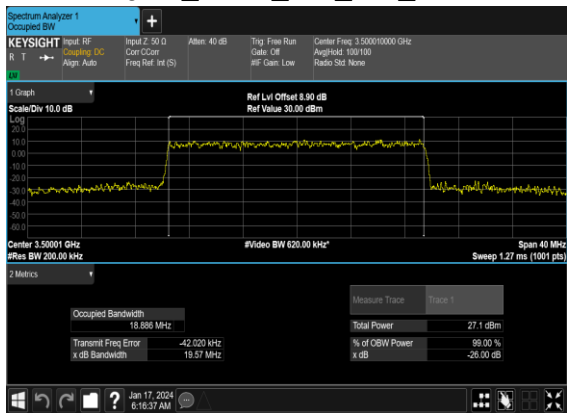


N77(20M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

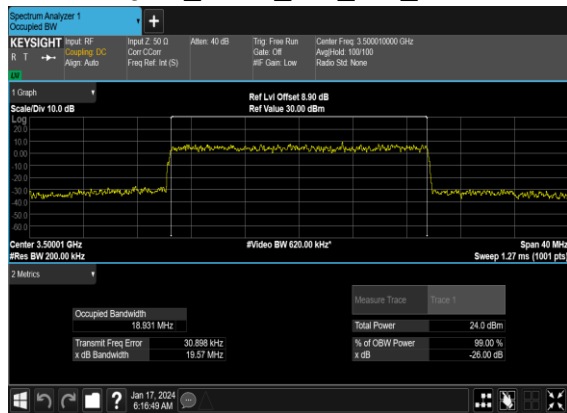


N77(25M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

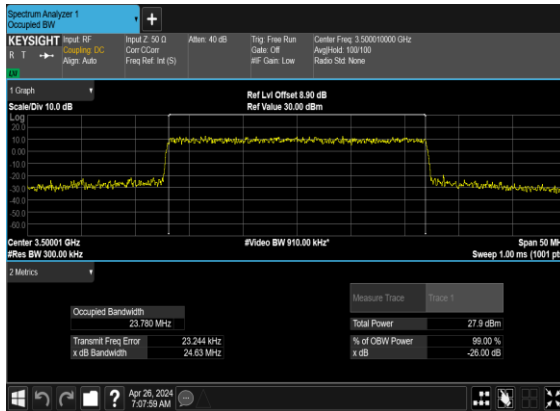


N77(25M)_CP-OFDM_16QAM_Outer_Full_Mid_CH

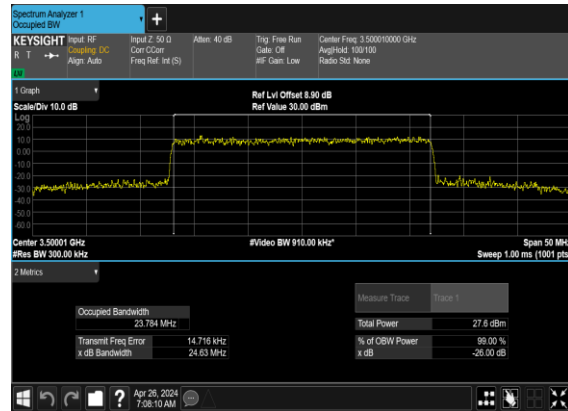


N77(25M)_CP-OFDM_64QAM_Outer_Full_Mid_CH

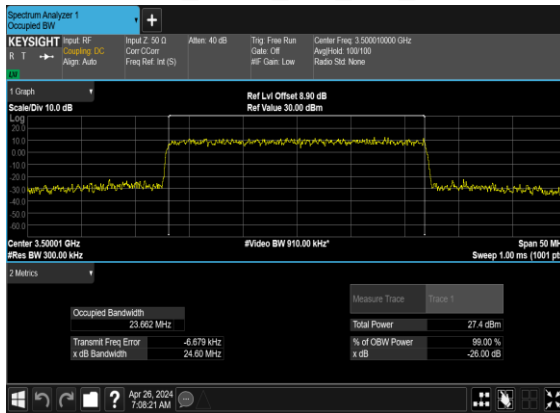


N77(25M)_CP-OFDM_256QAM_Outer_Full_Mid_CH

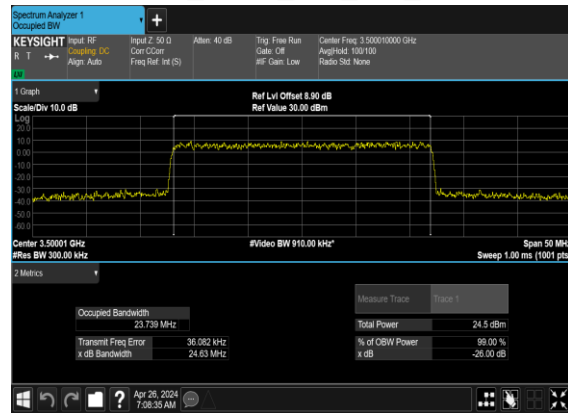


N77(30M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

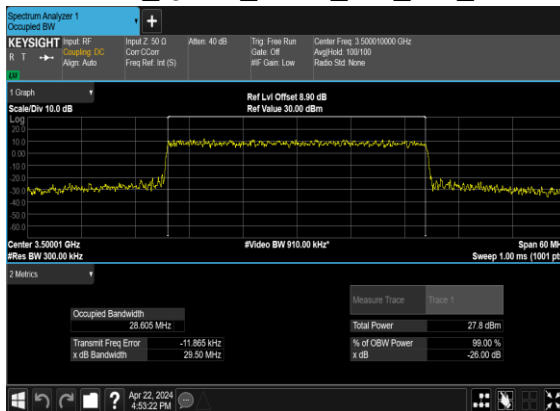


N77(30M)_CP-OFDM_16QAM_Outer_Full_Mid_CH

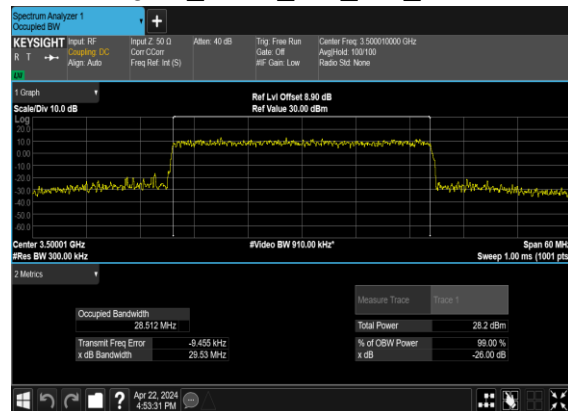

N77(30M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

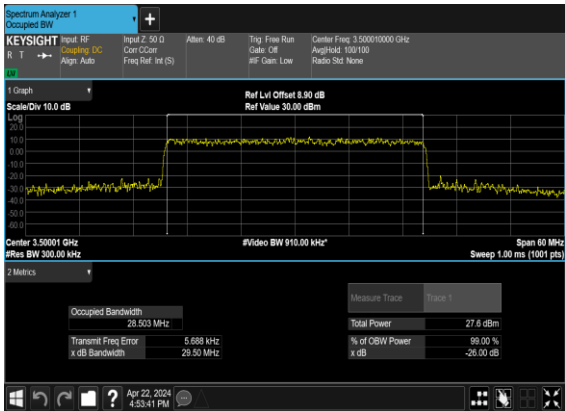


N77(30M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

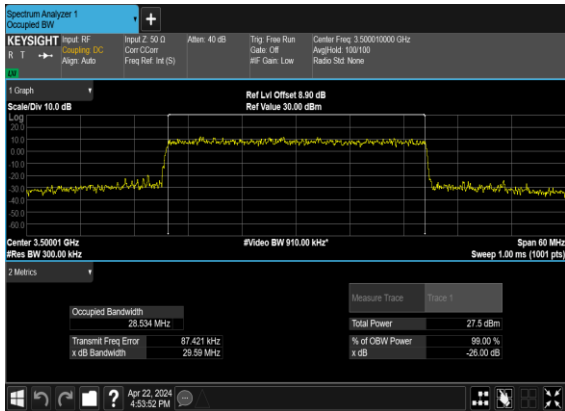


N77(40M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH




N77(40M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

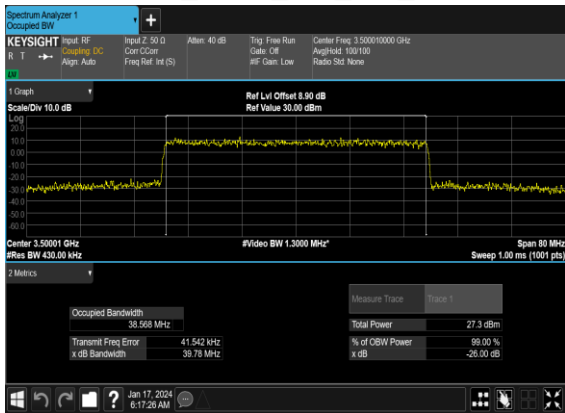


N77(40M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

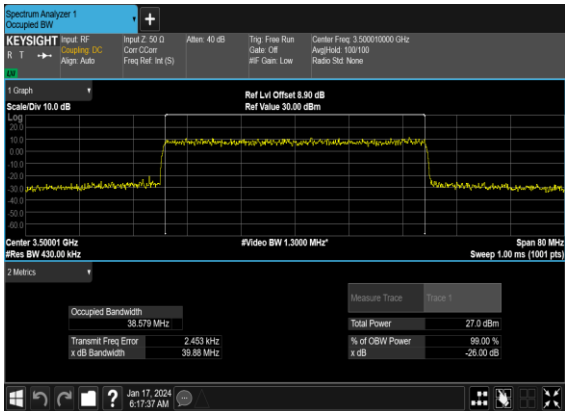


N77(40M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

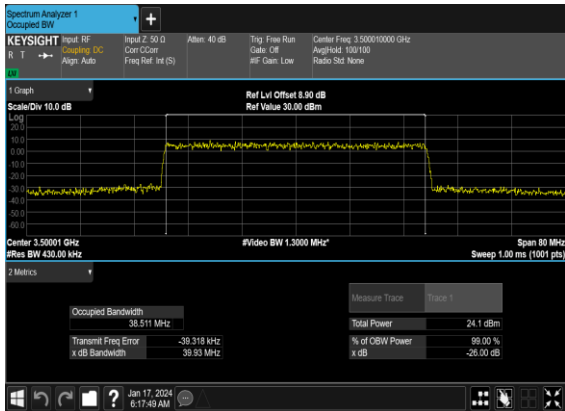


N77(50M)_CP- OFDM_QPSK_Outer_Full_Mid_CH

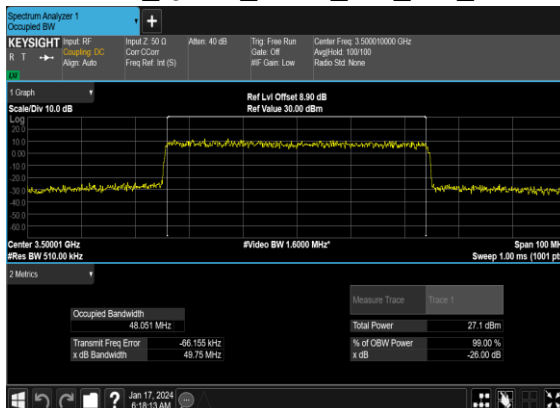


N77(50M)_CP-OFDM_16 QAM_Outer_Full_Mid_CH

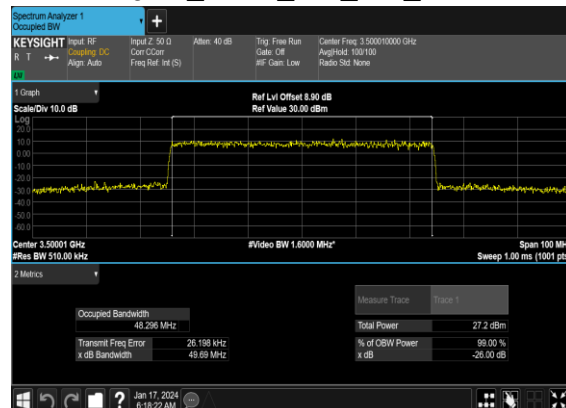

N77(50M)_CP-OFDM_64 QAM_Outer_Full_Mid_CH

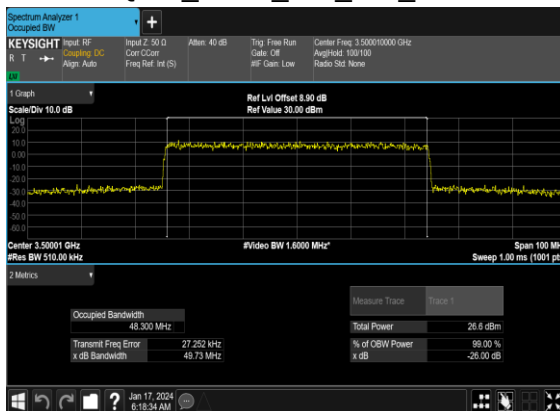

N77(50M)_CP-OFDM_256 QAM_Outer_Full_Mid_CH

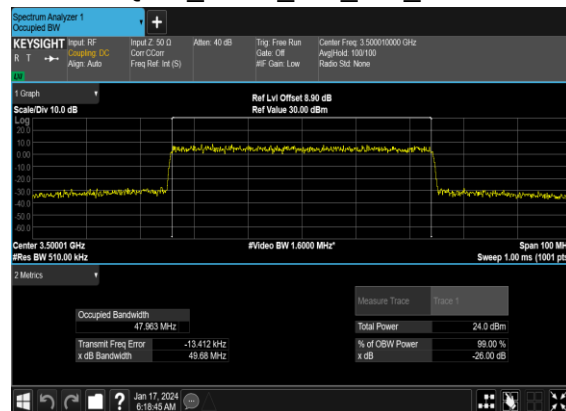


Conducted Spurious Emissions


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
77	15	10	630334	3455.01	DFT-s-OFDM BPSK	1@0	see graph	---
77	15	10	630334	3455.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	15	10	630334	3455.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	15	10	630334	3455.01	DFT-s-OFDM QPSK	1@0	see graph	---
77	15	10	630334	3455.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	15	10	630334	3455.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	15	10	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	---
77	15	10	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	15	10	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	15	10	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	---
77	15	10	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	15	10	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	15	10	636333	3544.995	DFT-s-OFDM BPSK	1@0	see graph	---
77	15	10	636333	3544.995	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	15	10	636333	3544.995	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	15	10	636333	3544.995	DFT-s-OFDM QPSK	1@0	see graph	---
77	15	10	636333	3544.995	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	15	10	636333	3544.995	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	15	25	630834	3462.51	DFT-s-OFDM BPSK	1@0	see graph	---
77	15	25	630834	3462.51	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	15	25	630834	3462.51	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	15	25	630834	3462.51	DFT-s-OFDM QPSK	1@0	see graph	---
77	15	25	630834	3462.51	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	15	25	630834	3462.51	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	15	25	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	---
77	15	25	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	15	25	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	15	25	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	---
77	15	25	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	15	25	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	15	25	635833	3537.495	DFT-s-OFDM BPSK	1@0	see graph	---
77	15	25	635833	3537.495	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	15	25	635833	3537.495	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	15	25	635833	3537.495	DFT-s-OFDM QPSK	1@0	see graph	---
77	15	25	635833	3537.495	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	15	25	635833	3537.495	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	15	50	631667	3475.005	DFT-s-OFDM BPSK	1@0	see graph	---
77	15	50	631667	3475.005	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	15	50	631667	3475.005	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	15	50	631667	3475.005	DFT-s-OFDM QPSK	1@0	see graph	---

77	15	50	631667	3475.005	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	15	50	631667	3475.005	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	15	50	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	---
77	15	50	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	15	50	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	15	50	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	---
77	15	50	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	15	50	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	15	50	635000	3525.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	15	50	635000	3525.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	15	50	635000	3525.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	15	50	635000	3525.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	15	50	635000	3525.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	15	50	635000	3525.0	DFT-s-OFDM QPSK	1@0	see graph	PASS

N77(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

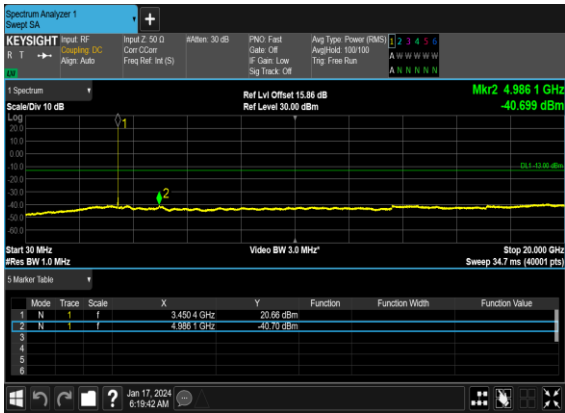


N77(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

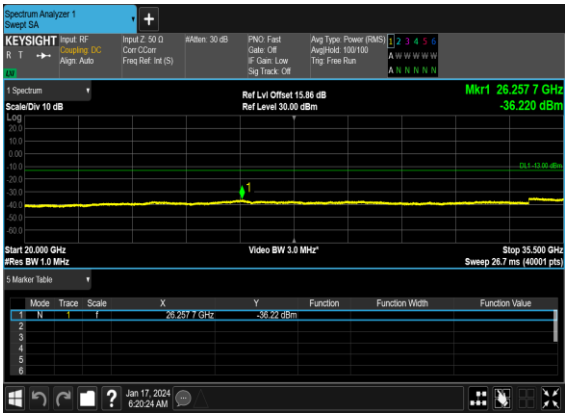

N77(10M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Low_CH




N77(10M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Low_CH

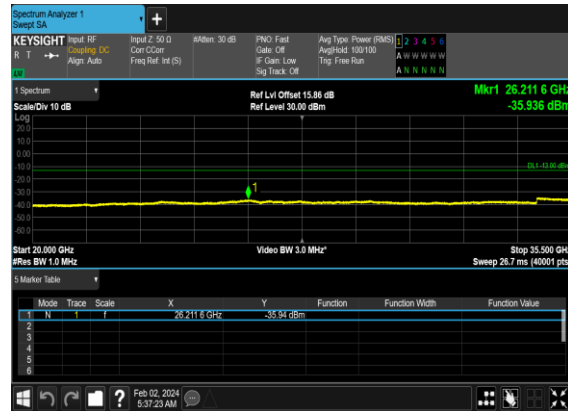


N77(10M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_Mid_CH




N77(10M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_Mid_CH

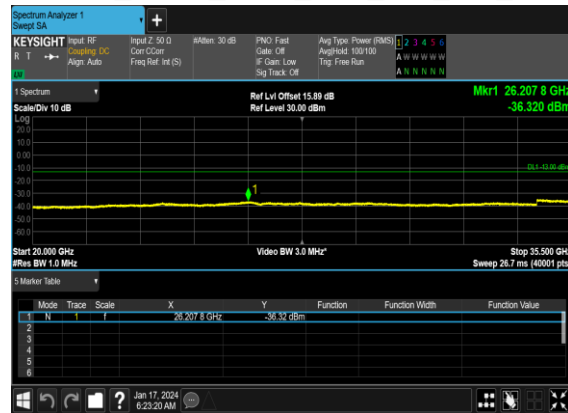

N77(10M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Mid_CH

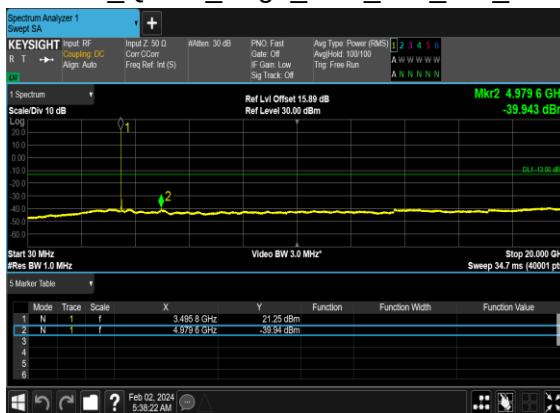


N77(10M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Mid_CH

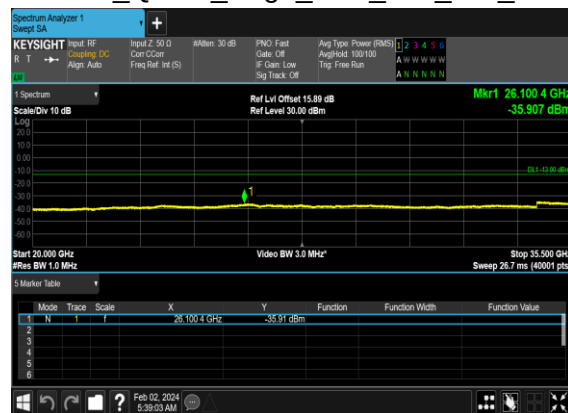

N77(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH




N77(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

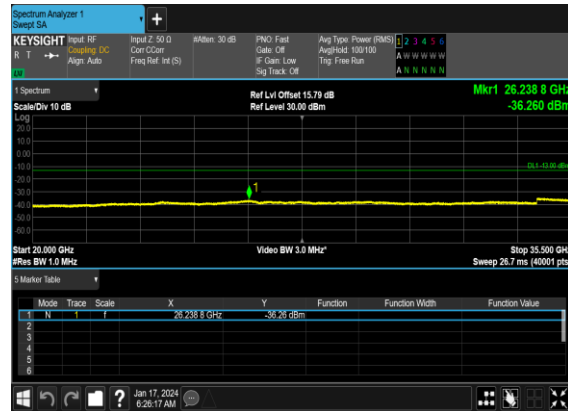


N77(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH




N77(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

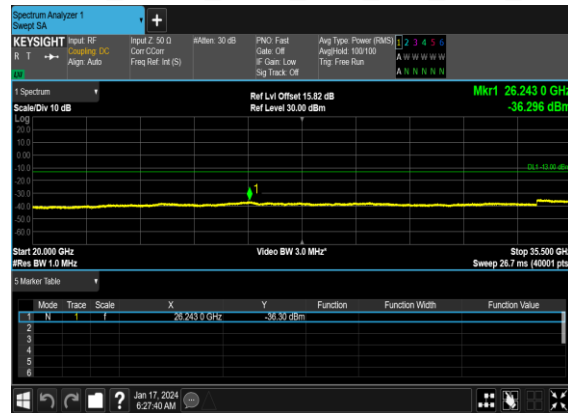

N77(25M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

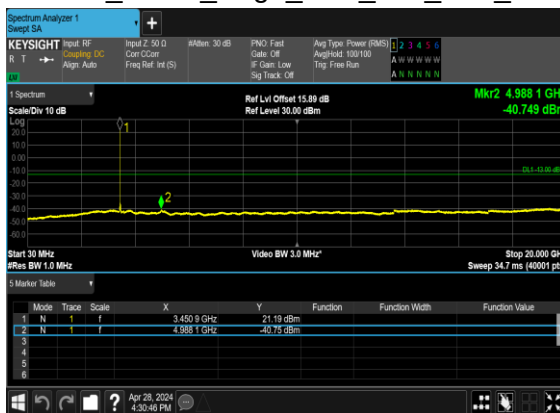


N77(25M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

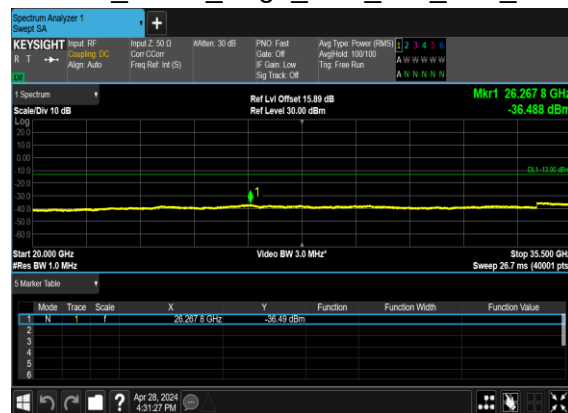

N77(25M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Low_CH




N77(25M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Low_CH

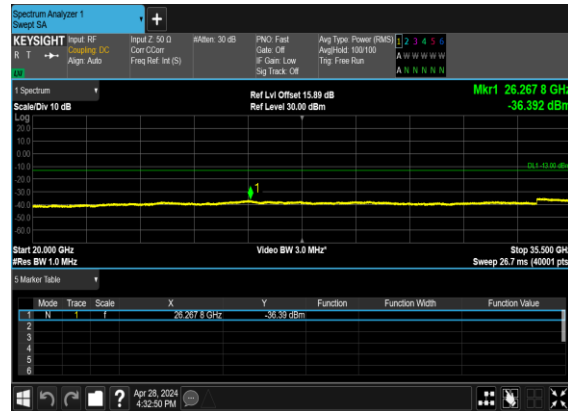


N77(25M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_Mid_CH




N77(25M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_Mid_CH

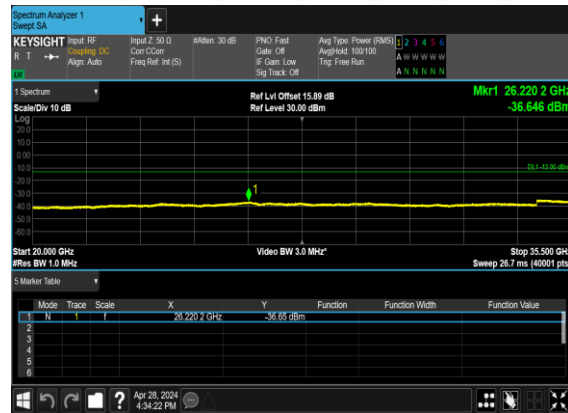

N77(25M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Mid_CH

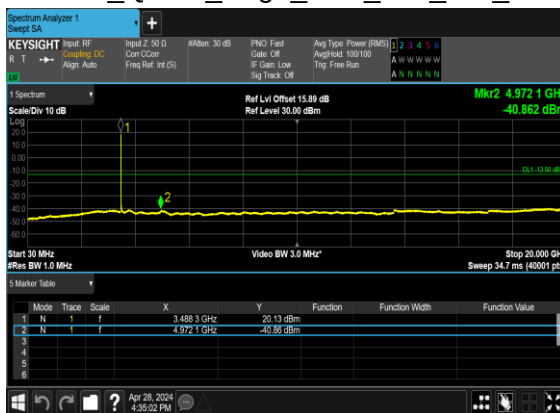


N77(25M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Mid_CH

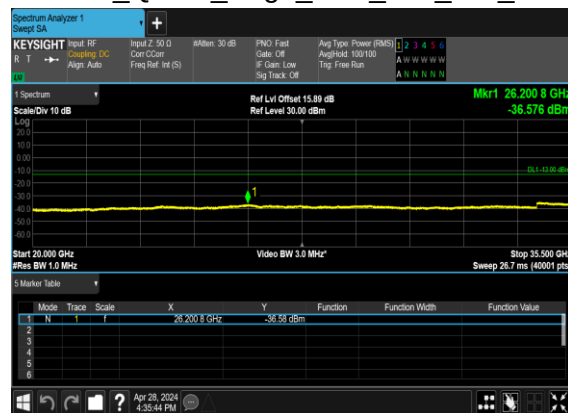

N77(25M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_High_CH




N77(25M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_High_CH

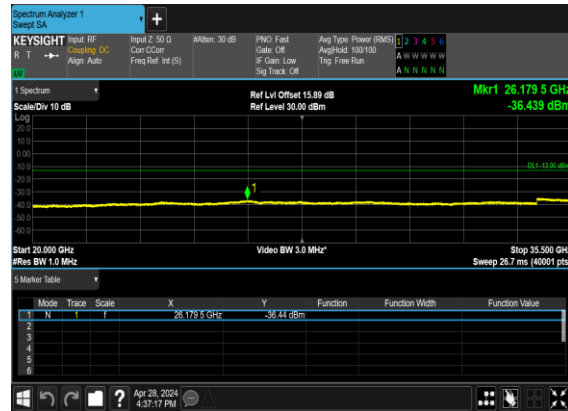

N77(25M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_High_CH



N77(25M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_High_CH

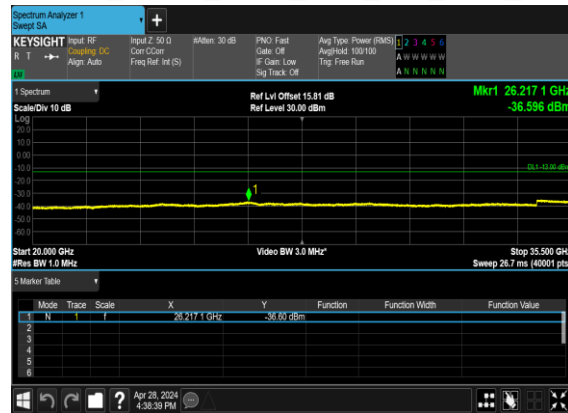

N77(50M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_Low_CH




N77(50M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_Low_CH



N77(50M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Low_CH




N77(50M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Low_CH

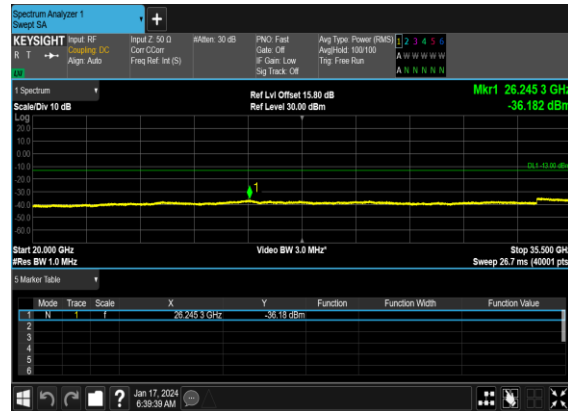


N77(50M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_Mid_CH




N77(50M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_Mid_CH

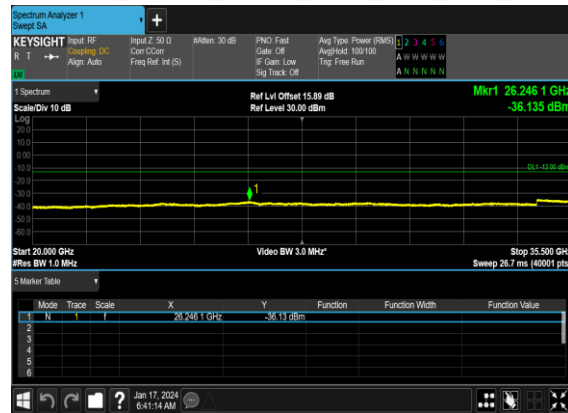

N77(50M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Mid_CH

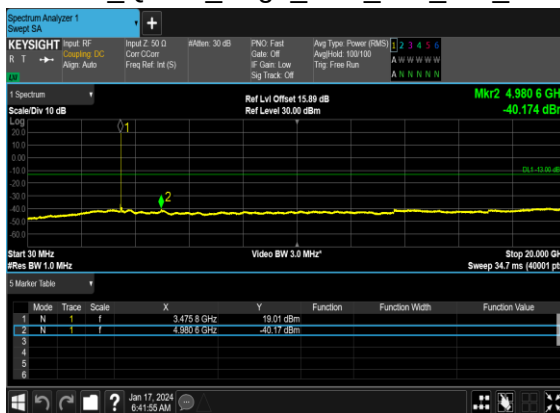


N77(50M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_Mid_CH

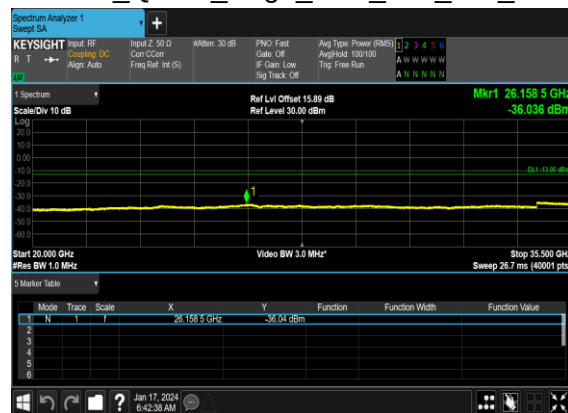

N77(50M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_High_CH




N77(50M)_DFT-s- OFDM_BPSK_Edge_1RB_Left_High_CH

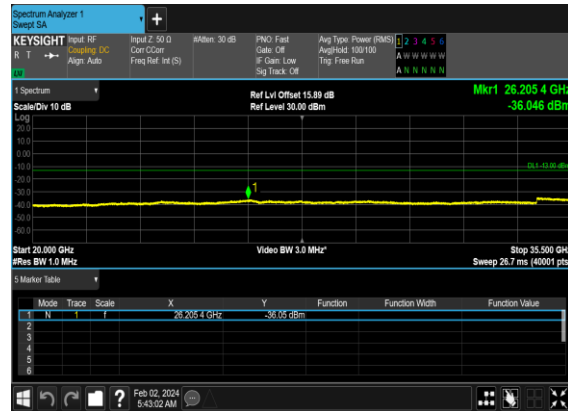

N77(50M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_High_CH




N77(50M)_DFT-s- OFDM_QPSK_Edge_1RB_Left_High_CH

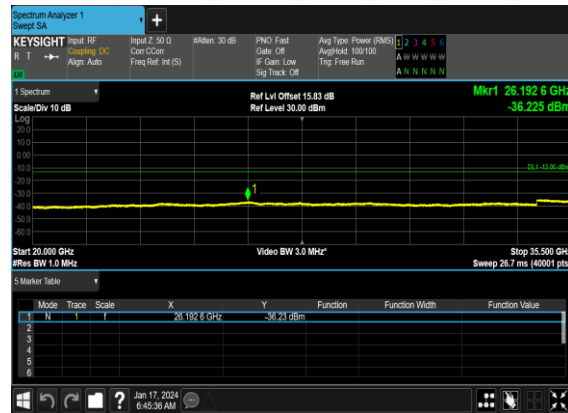


Conducted Band Edge

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
77	15	10	630334	3455.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	15	10	630334	3455.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	15	10	630334	3455.01	DFT-s-OFDM BPSK	50@0	see graph	PASS
77	15	10	630334	3455.01	DFT-s-OFDM QPSK	50@0	see graph	PASS
77	15	10	636333	3544.995	DFT-s-OFDM BPSK	1@51	see graph	PASS
77	15	10	636333	3544.995	DFT-s-OFDM QPSK	1@51	see graph	PASS
77	15	10	636333	3544.995	DFT-s-OFDM BPSK	50@0	see graph	PASS
77	15	10	636333	3544.995	DFT-s-OFDM QPSK	50@0	see graph	PASS
77	15	25	630834	3462.51	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	15	25	630834	3462.51	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	15	25	630834	3462.51	DFT-s-OFDM BPSK	128@0	see graph	PASS
77	15	25	630834	3462.51	DFT-s-OFDM QPSK	128@0	see graph	PASS
77	15	25	635833	3537.495	DFT-s-OFDM BPSK	1@132	see graph	PASS
77	15	25	635833	3537.495	DFT-s-OFDM QPSK	1@132	see graph	PASS
77	15	25	635833	3537.495	DFT-s-OFDM BPSK	128@0	see graph	PASS
77	15	25	635833	3537.495	DFT-s-OFDM QPSK	128@0	see graph	PASS
77	15	50	631667	3475.005	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	15	50	631667	3475.005	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	15	50	631667	3475.005	DFT-s-OFDM BPSK	270@0	see graph	PASS
77	15	50	631667	3475.005	DFT-s-OFDM QPSK	270@0	see graph	PASS
77	15	50	635000	3525.0	DFT-s-OFDM BPSK	1@269	see graph	PASS
77	15	50	635000	3525.0	DFT-s-OFDM QPSK	1@269	see graph	PASS
77	15	50	635000	3525.0	DFT-s-OFDM BPSK	270@0	see graph	PASS
77	15	50	635000	3525.0	DFT-s-OFDM QPSK	270@0	see graph	PASS


N77(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

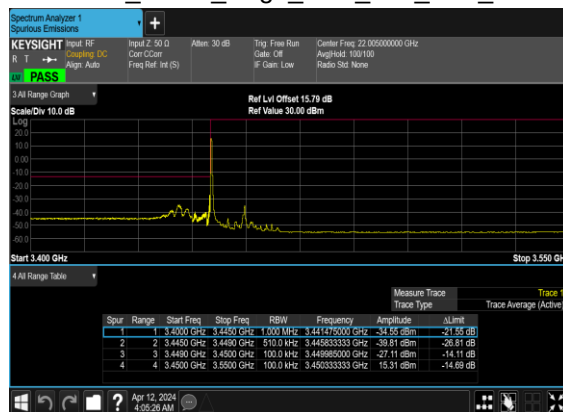


N77(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

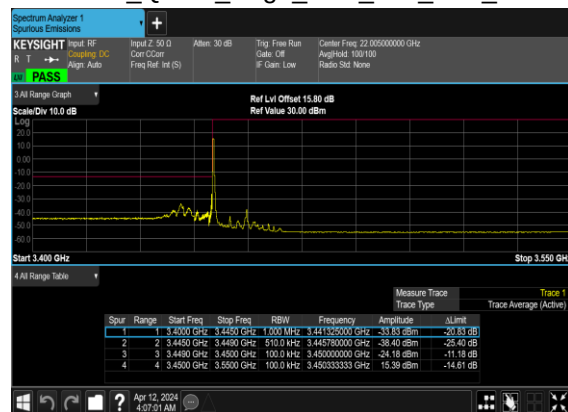


N77(10M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CH

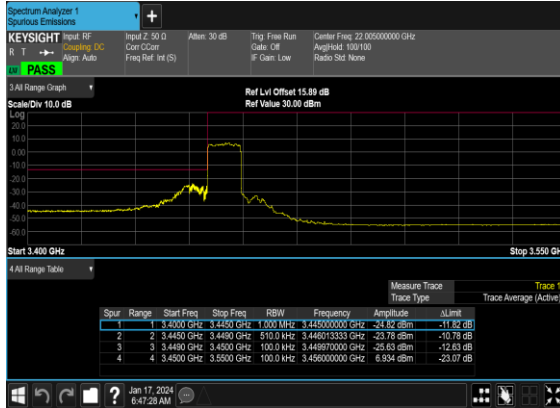


N77(10M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

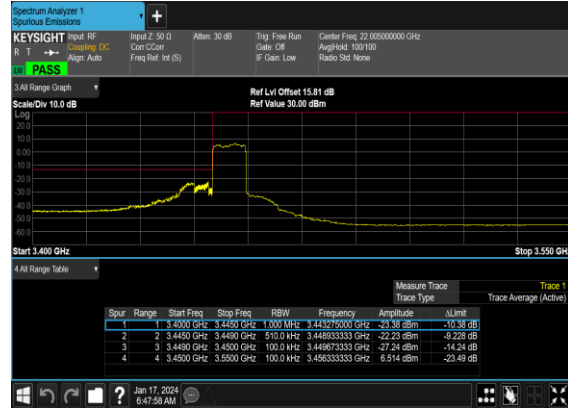


N77(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_High_CH

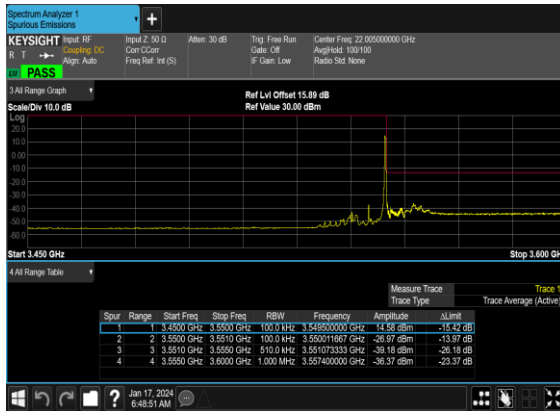


N77(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_High_CH

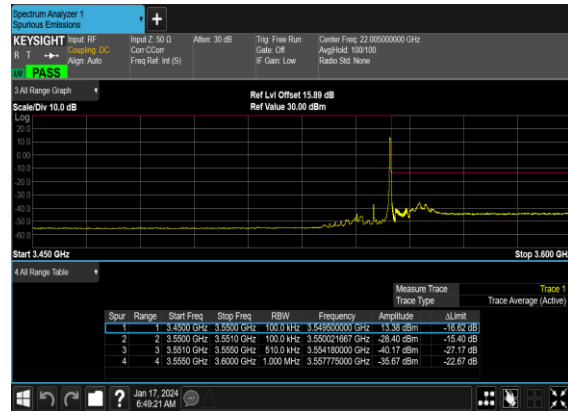


N77(10M)_DFT-s-
OFDM_BPSK_Outer_Full_High_CH

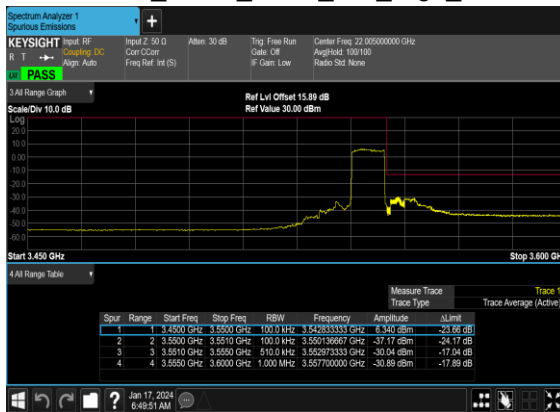


N77(10M)_DFT-s-
OFDM_QPSK_Outer_Full_High_CH

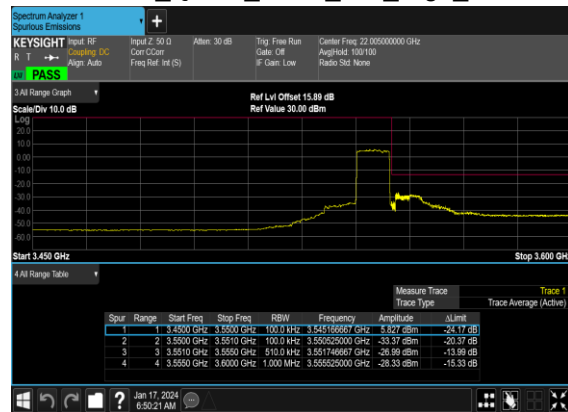


N77(25M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

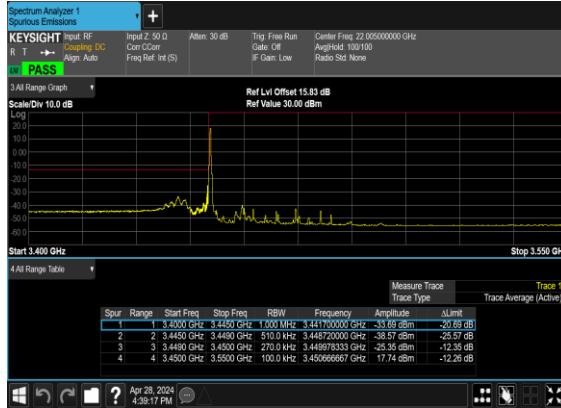

N77(25M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

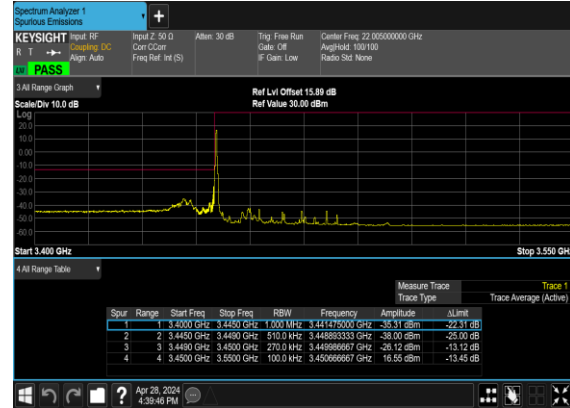


N77(25M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CH

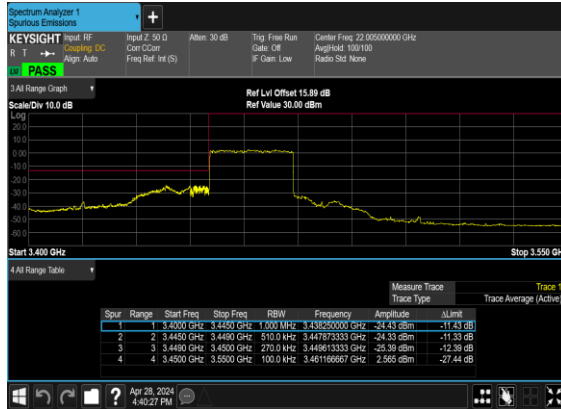


N77(25M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH



N77(25M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_High_CH

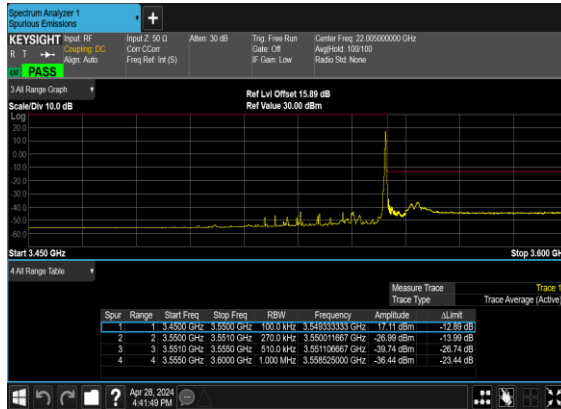


N77(25M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_High_CH

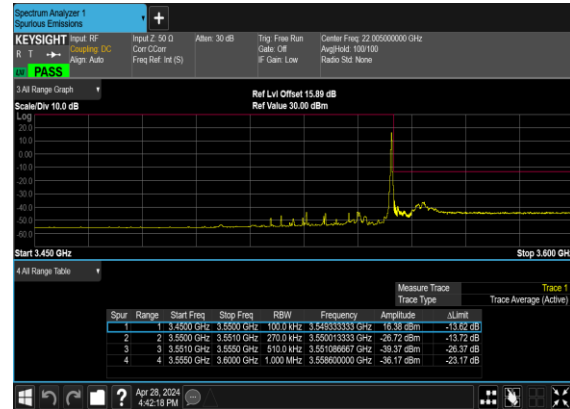


N77(25M)_DFT-s-
OFDM_BPSK_Outer_Full_High_CH




N77(25M)_DFT-s-
OFDM_QPSK_Outer_Full_High_CH

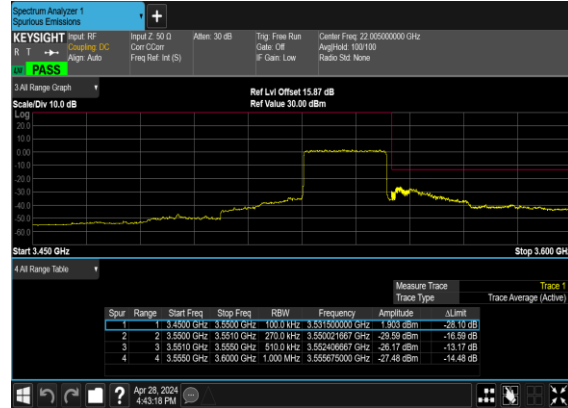


N77(50M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

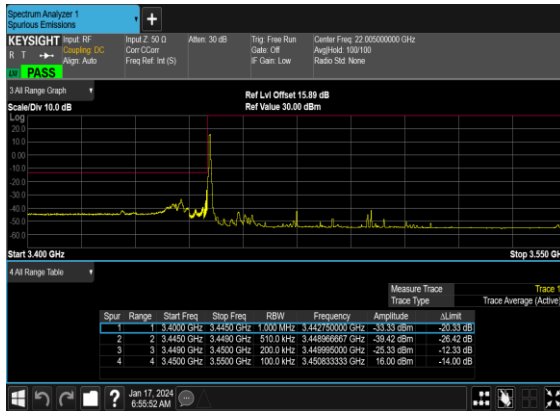


N77(50M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

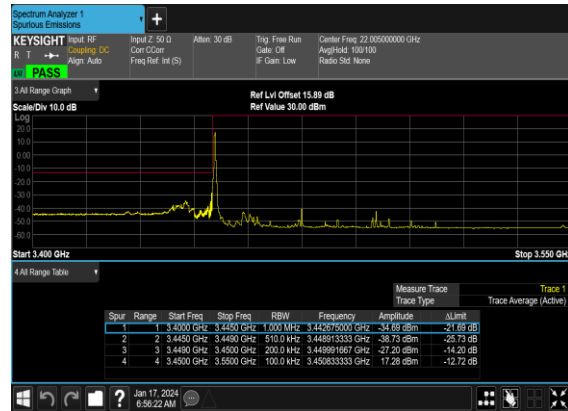


N77(50M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CH

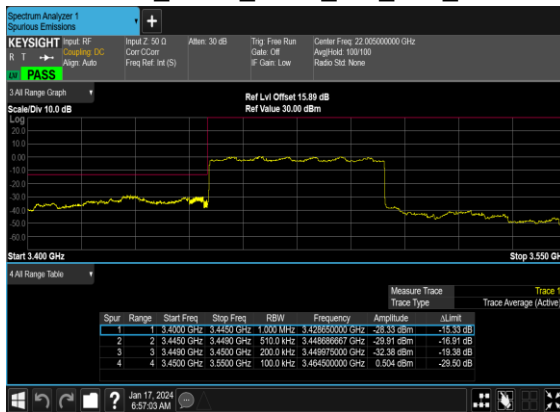


N77(50M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

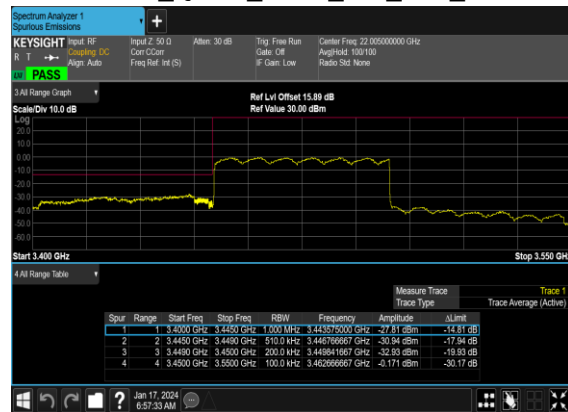


N77(50M)_DFT-s- OFDM_BPSK_Edge_1RB_Right_High_CH

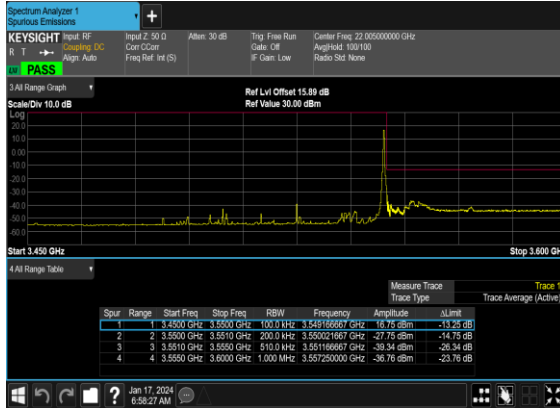


N77(50M)_DFT-s- OFDM_QPSK_Edge_1RB_Right_High_CH

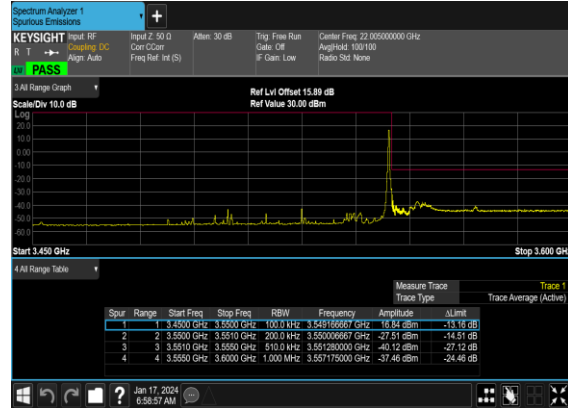

N77(50M)_DFT-s- OFDM_BPSK_Outer_Full_High_CH

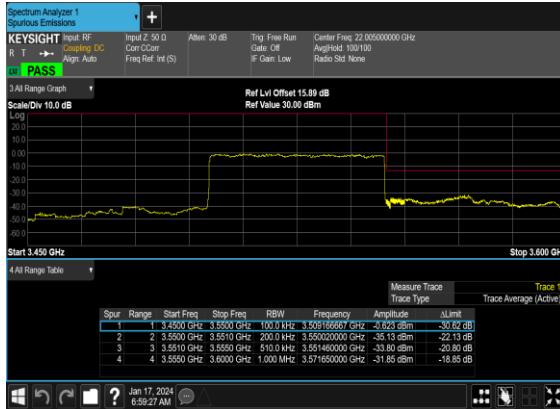

N77(50M)_DFT-s- OFDM_QPSK_Outer_Full_High_CH

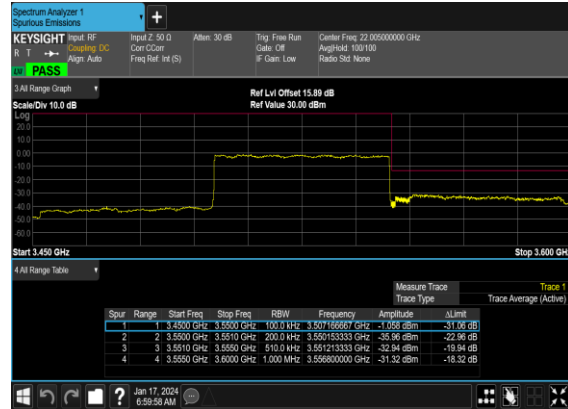

FR1 N77 MIMO ANT(3+5)_SCS 15kHz

Transmitter Conducted Output Power And EIRP, ($G_T - L_C$)=-1.49dB

NR Band	SCS	Band Width	Arfcn	Freq (MHz)	Modulation	RB	ANT5 Power (dBm)	ANT3 Power (dBm)	Conducted Power (dBm)	EIRP (dBm)	EIRP (W)
77	15	10	630334	3455.01	DFT-s-OFDM QPSK	1@1	26.62	26.29	29.47	27.98	0.6281
77	15	10	630334	3455.01	DFT-s-OFDM 16 QAM	1@1	25.49	25.13	28.32	26.83	0.4819
77	15	10	633334	3500.01	DFT-s-OFDM QPSK	1@1	26.53	26.21	29.38	27.89	0.6152
77	15	10	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	25.42	25.13	28.29	26.8	0.4786
77	15	10	636333	3544.995	DFT-s-OFDM QPSK	1@1	26.4	26.43	29.43	27.94	0.6223
77	15	10	636333	3544.995	DFT-s-OFDM 16 QAM	1@1	25.45	25.4	28.44	26.95	0.4955
77	15	15	630500	3457.5	DFT-s-OFDM QPSK	1@1	26.61	26.27	29.45	27.96	0.6252
77	15	15	630500	3457.5	DFT-s-OFDM 16 QAM	1@1	25.55	25.17	28.37	26.88	0.4875
77	15	15	633334	3500.01	DFT-s-OFDM QPSK	1@1	26.54	26.23	29.40	27.91	0.6180
77	15	15	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	25.54	25.24	28.40	26.91	0.4909
77	15	15	636166	3542.49	DFT-s-OFDM QPSK	1@1	26.34	26.36	29.36	27.87	0.6124
77	15	15	636166	3542.49	DFT-s-OFDM 16 QAM	1@1	25.34	25.38	28.37	26.88	0.4875
77	15	20	630667	3460.005	DFT-s-OFDM QPSK	1@1	26.66	26.34	29.51	28.02	0.6339
77	15	20	630667	3460.005	DFT-s-OFDM 16 QAM	1@1	25.61	25.27	28.45	26.96	0.4966
77	15	20	633334	3500.01	DFT-s-OFDM QPSK	1@1	26.59	26.24	29.43	27.94	0.6223
77	15	20	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	25.57	25.19	28.39	26.9	0.4898
77	15	20	636000	3540	DFT-s-OFDM QPSK	1@1	26.33	26.32	29.34	27.85	0.6095
77	15	20	636000	3540	DFT-s-OFDM 16 QAM	1@1	25.38	25.31	28.36	26.87	0.4864
77	15	25	630834	3462.51	DFT-s-OFDM QPSK	1@1	26.56	25.8	29.21	27.72	0.5916
77	15	25	630834	3462.51	DFT-s-OFDM 16 QAM	1@1	25.81	26.01	28.92	27.43	0.5534
77	15	25	633334	3500.01	DFT-s-OFDM QPSK	1@1	26.8	25.95	29.41	27.92	0.6194
77	15	25	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	26.16	25.51	28.86	27.37	0.5458
77	15	25	635833	3537.495	DFT-s-OFDM QPSK	1@1	26.55	26.11	29.35	27.86	0.6109
77	15	25	635833	3537.495	DFT-s-OFDM 16 QAM	1@1	26.15	25.75	28.96	27.47	0.5585
77	15	30	631000	3465	DFT-s-OFDM QPSK	1@1	26.66	26.3	29.49	28	0.6310
77	15	30	631000	3465	DFT-s-OFDM 16 QAM	1@1	25.49	25.2	28.36	26.87	0.4864
77	15	30	633334	3500.01	DFT-s-OFDM QPSK	1@1	26.69	26.29	29.50	28.01	0.6324
77	15	30	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	25.55	25.15	28.36	26.87	0.4864
77	15	30	635666	3534.99	DFT-s-OFDM QPSK	1@1	26.51	26.51	29.52	28.03	0.6353
77	15	30	635666	3534.99	DFT-s-OFDM 16 QAM	1@1	25.44	25.38	28.42	26.93	0.4932
77	15	40	631334	3470.01	DFT-s-OFDM QPSK	1@1	26.6	26.4	29.51	28.02	0.6339
77	15	40	631334	3470.01	DFT-s-OFDM 16 QAM	1@1	25.38	25.25	28.33	26.84	0.4831
77	15	40	633334	3500.01	DFT-s-OFDM QPSK	1@1	26.71	26.26	29.50	28.01	0.6324
77	15	40	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	25.34	25.14	28.25	26.76	0.4742
77	15	40	635333	3529.995	DFT-s-OFDM QPSK	1@1	26.57	26.36	29.48	27.99	0.6295
77	15	40	635333	3529.995	DFT-s-OFDM 16 QAM	1@1	25.4	25.25	28.34	26.85	0.4842
77	15	50	631667	3475.005	DFT-s-OFDM PI/2 BPSK	135@67	26.57	26.15	29.38	27.89	0.6152
77	15	50	631667	3475.005	DFT-s-OFDM PI/2 BPSK	1@1	26.53	26.25	29.40	27.91	0.6180
77	15	50	631667	3475.005	DFT-s-OFDM PI/2 BPSK	1@268	26.45	26.24	29.36	27.87	0.6124
77	15	50	631667	3475.005	DFT-s-OFDM QPSK	135@67	26.58	26.19	29.40	27.91	0.6180
77	15	50	631667	3475.005	DFT-s-OFDM QPSK	1@1	26.51	26.29	29.41	27.92	0.6194

77	15	50	631667	3475.005	DFT-s-OFDM QPSK	1@268	26.53	26.31	29.43	27.94	0.6223
77	15	50	631667	3475.005	DFT-s-OFDM 16 QAM	135@67	25.58	25.18	28.39	26.9	0.4898
77	15	50	631667	3475.005	DFT-s-OFDM 16 QAM	1@1	25.52	25.25	28.40	26.91	0.4909
77	15	50	631667	3475.005	DFT-s-OFDM 16 QAM	1@268	25.47	25.2	28.35	26.86	0.4853
77	15	50	631667	3475.005	DFT-s-OFDM 64 QAM	135@67	23.66	23.23	26.46	24.97	0.3141
77	15	50	631667	3475.005	DFT-s-OFDM 64 QAM	1@1	23.74	23.51	26.64	25.15	0.3273
77	15	50	631667	3475.005	DFT-s-OFDM 64 QAM	1@268	23.7	23.45	26.59	25.1	0.3236
77	15	50	631667	3475.005	DFT-s-OFDM 256 QAM	135@67	23.65	23.22	26.45	24.96	0.3133
77	15	50	631667	3475.005	DFT-s-OFDM 256 QAM	1@1	21.4	20.49	23.98	22.49	0.1774
77	15	50	631667	3475.005	DFT-s-OFDM 256 QAM	1@268	20.87	21.1	24.00	22.51	0.1782
77	15	50	631667	3475.005	CP-OFDM QPSK	135@67	25.08	24.67	27.89	26.4	0.4365
77	15	50	631667	3475.005	CP-OFDM QPSK	1@1	25.03	24.73	27.89	26.4	0.4365
77	15	50	631667	3475.005	CP-OFDM QPSK	1@268	24.96	24.68	27.83	26.34	0.4305
77	15	50	633334	3500.01	DFT-s-OFDM PI/2 BPSK	135@67	26.5	26.36	29.44	27.95	0.6237
77	15	50	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	26.58	26.19	29.40	27.91	0.6180
77	15	50	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@268	26.28	26.32	29.31	27.82	0.6053
77	15	50	633334	3500.01	DFT-s-OFDM QPSK	135@67	26.69	26.41	29.56	28.07	0.6412
77	15	50	633334	3500.01	DFT-s-OFDM QPSK	1@1	26.58	26.2	29.40	27.91	0.6180
77	15	50	633334	3500.01	DFT-s-OFDM QPSK	1@268	26.3	26.39	29.36	27.87	0.6124
77	15	50	633334	3500.01	DFT-s-OFDM 16 QAM	135@67	25.57	25.38	28.49	27	0.5012
77	15	50	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	25.55	25.11	28.35	26.86	0.4853
77	15	50	633334	3500.01	DFT-s-OFDM 16 QAM	1@268	25.21	25.26	28.25	26.76	0.4742
77	15	50	633334	3500.01	DFT-s-OFDM 64 QAM	135@67	23.6	23.46	26.54	25.05	0.3199
77	15	50	633334	3500.01	DFT-s-OFDM 64 QAM	1@1	23.5	23.4	26.46	24.97	0.3141
77	15	50	633334	3500.01	DFT-s-OFDM 64 QAM	1@268	23.37	23.39	26.39	24.9	0.3090
77	15	50	633334	3500.01	DFT-s-OFDM 256 QAM	135@67	23.6	23.4	26.51	25.02	0.3177
77	15	50	633334	3500.01	DFT-s-OFDM 256 QAM	1@1	21.53	20.98	24.27	22.78	0.1897
77	15	50	633334	3500.01	DFT-s-OFDM 256 QAM	1@268	21.23	21.18	24.22	22.73	0.1875
77	15	50	633334	3500.01	CP-OFDM QPSK	135@67	22.62	22.35	25.50	24.01	0.2518
77	15	50	633334	3500.01	CP-OFDM QPSK	1@1	25.13	24.71	27.94	26.45	0.4416
77	15	50	633334	3500.01	CP-OFDM QPSK	1@268	24.83	24.86	27.86	26.37	0.4335
77	15	50	635000	3525	DFT-s-OFDM PI/2 BPSK	135@67	26.28	26.34	29.32	27.83	0.6067
77	15	50	635000	3525	DFT-s-OFDM PI/2 BPSK	1@1	26.43	26.22	29.34	27.85	0.6095
77	15	50	635000	3525	DFT-s-OFDM PI/2 BPSK	1@268	26.33	26.41	29.38	27.89	0.6152
77	15	50	635000	3525	DFT-s-OFDM QPSK	135@67	26.31	26.33	29.33	27.84	0.6081
77	15	50	635000	3525	DFT-s-OFDM QPSK	1@1	26.56	26.34	29.46	27.97	0.6266
77	15	50	635000	3525	DFT-s-OFDM QPSK	1@268	26.39	26.51	29.46	27.97	0.6266
77	15	50	635000	3525	DFT-s-OFDM 16 QAM	135@67	25.35	25.37	28.37	26.88	0.4875
77	15	50	635000	3525	DFT-s-OFDM 16 QAM	1@1	25.4	25.22	28.32	26.83	0.4819
77	15	50	635000	3525	DFT-s-OFDM 16 QAM	1@268	25.29	25.36	28.34	26.85	0.4842
77	15	50	635000	3525	DFT-s-OFDM 64 QAM	135@67	23.39	23.41	26.41	24.92	0.3105
77	15	50	635000	3525	DFT-s-OFDM 64 QAM	1@1	23.4	23.5	26.46	24.97	0.3141
77	15	50	635000	3525	DFT-s-OFDM 64 QAM	1@268	23.59	23.73	26.67	25.18	0.3296
77	15	50	635000	3525	DFT-s-OFDM 256 QAM	135@67	20.92	20.87	23.91	22.42	0.1746
77	15	50	635000	3525	DFT-s-OFDM 256 QAM	1@1	20.9	20.63	23.78	22.29	0.1694
77	15	50	635000	3525	DFT-s-OFDM 256 QAM	1@268	21.22	20.9	24.07	22.58	0.1811
77	15	50	635000	3525	CP-OFDM QPSK	135@67	22.42	22.42	25.43	23.94	0.2477
77	15	50	635000	3525	CP-OFDM QPSK	1@1	25.36	24.93	28.16	26.67	0.4645
77	15	50	635000	3525	CP-OFDM QPSK	1@268	24.76	24.96	27.87	26.38	0.4345

FR1 N77 MIMO ANT(3+5)_ANT5_SCS 15kHz

Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
77	15	20	633334	3500.01	DFT-s-OFDM QPSK	100@0	0.0067	PASS	NV
77	15	20	633334	3500.01	DFT-s-OFDM QPSK	100@0	0.0024	PASS	LV
77	15	20	633334	3500.01	DFT-s-OFDM QPSK	100@0	0.0061	PASS	HV
77	15	20	633334	3500.01	DFT-s-OFDM QPSK	100@0	0.0047	PASS	-30°C
77	15	20	633334	3500.01	DFT-s-OFDM QPSK	100@0	0.0024	PASS	-20°C
77	15	20	633334	3500.01	DFT-s-OFDM QPSK	100@0	0.0048	PASS	-10°C
77	15	20	633334	3500.01	DFT-s-OFDM QPSK	100@0	0.0034	PASS	0°C
77	15	20	633334	3500.01	DFT-s-OFDM QPSK	100@0	0.0041	PASS	10°C
77	15	20	633334	3500.01	DFT-s-OFDM QPSK	100@0	0.0067	PASS	20°C
77	15	20	633334	3500.01	DFT-s-OFDM QPSK	100@0	0.0024	PASS	30°C
77	15	20	633334	3500.01	DFT-s-OFDM QPSK	100@0	0.0040	PASS	40°C
77	15	20	633334	3500.01	DFT-s-OFDM QPSK	100@0	0.0069	PASS	50°C

Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
77	15	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	100@0	4.5	13	PASS
77	15	20	633334	3500.01	DFT-s-OFDM QPSK	100@0	5.63	13	PASS

N77(20M)_DFT-s-OFDM_PI_2-
BPSK Outer Full Mid CH



N77(20M)_DFT-s-
OFDM QPSK Outer Full Mid CH



Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
77	15	10	633334	3500.01	CP-OFDM QPSK	52@0	9.2945	9.644
77	15	10	633334	3500.01	CP-OFDM 16 QAM	52@0	9.2652	9.673
77	15	10	633334	3500.01	CP-OFDM 64 QAM	52@0	9.3039	9.662
77	15	10	633334	3500.01	CP-OFDM 256 QAM	52@0	9.3035	9.664
77	15	15	633334	3500.01	CP-OFDM QPSK	79@0	14.1	14.64
77	15	15	633334	3500.01	CP-OFDM 16 QAM	79@0	14.086	14.66
77	15	15	633334	3500.01	CP-OFDM 64 QAM	79@0	14.085	14.57
77	15	15	633334	3500.01	CP-OFDM 256 QAM	79@0	14.075	14.65
77	15	20	633334	3500.01	CP-OFDM QPSK	106@0	18.916	19.57
77	15	20	633334	3500.01	CP-OFDM 16 QAM	106@0	18.894	19.53
77	15	20	633334	3500.01	CP-OFDM 64 QAM	106@0	18.939	19.53
77	15	20	633334	3500.01	CP-OFDM 256 QAM	106@0	18.948	19.64
77	15	25	633334	3500.01	CP-OFDM QPSK	133@0	23.724	24.63
77	15	25	633334	3500.01	CP-OFDM 16 QAM	133@0	23.758	24.63
77	15	25	633334	3500.01	CP-OFDM 64 QAM	133@0	23.722	24.59
77	15	25	633334	3500.01	CP-OFDM 256 QAM	133@0	23.718	24.65
77	15	30	633334	3500.01	CP-OFDM QPSK	160@0	28.654	29.53
77	15	30	633334	3500.01	CP-OFDM 16 QAM	160@0	28.621	29.57
77	15	30	633334	3500.01	CP-OFDM 64 QAM	160@0	28.502	29.71
77	15	30	633334	3500.01	CP-OFDM 256 QAM	160@0	28.485	29.51
77	15	40	633334	3500.01	CP-OFDM QPSK	216@0	38.655	39.82
77	15	40	633334	3500.01	CP-OFDM 16 QAM	216@0	38.545	39.9
77	15	40	633334	3500.01	CP-OFDM 64 QAM	216@0	38.555	39.79
77	15	40	633334	3500.01	CP-OFDM 256 QAM	216@0	38.553	39.83
77	15	50	633334	3500.01	CP-OFDM QPSK	270@0	48.085	49.78
77	15	50	633334	3500.01	CP-OFDM 16 QAM	270@0	48.115	49.75
77	15	50	633334	3500.01	CP-OFDM 64 QAM	270@0	48.234	49.7
77	15	50	633334	3500.01	CP-OFDM 256 QAM	270@0	48.046	49.73