



FCC RADIO TEST REPORT

FCC ID : ZMOFM350GLL
Equipment : 5G Module
Brand Name : Fibocom Wireless Inc.
Model Name : FM350-GL
Applicant : Fibocom Wireless Inc.
1101, Tower A, Building 6, Shenzhen International,
Innovation Valley, Dashi 1st Rd, Nanshan,
ShenZhen, China
Manufacturer : LCFC (HeFei) Electronics Technology Co., Ltd.
No. 3188-1, Yungu Road (Hefei Export Processing
Zone), Hefei Economics & Technology
Development Area, Anhui, CHINA
Standard : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)

Equipment: Fibocom FM350-GL tested inside of Lenovo Notebook Computer.

The product was received on Oct. 20, 2022 and testing was performed from Nov. 09, 2022 to Dec. 27, 2022. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test	5
1.2 Product Specification of Equipment Under Test	7
1.3 Modification of EUT	7
1.4 Testing Location	8
1.5 Applicable Standards	8
2 Test Configuration of Equipment Under Test	9
2.1 Test Mode.....	9
2.2 Connection Diagram of Test System	10
2.3 Support Unit used in test configuration	10
2.4 Frequency List of Low/Middle/High Channels	10
3 Conducted Test Result	11
3.1 Measuring Instruments.....	11
3.2 Conducted Output Power and ERP/EIRP	12
4 Radiated Test Items	13
4.1 Measuring Instruments.....	13
4.2 Test Setup	13
4.3 Test Result of Radiated Test.....	14
4.4 Field Strength of Spurious Radiation Measurement	15
5 List of Measuring Equipment.....	16
6 Uncertainty of Evaluation	18
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of Radiated Test	
Appendix C. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FG2O2027A	01	Initial issue of report	Dec. 30, 2022
FG2O2027A	02	Revise FCC ID	Jan. 16, 2023

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Pass	-
	§22.913 (a)(5)	Effective Radiated Power (WCDMA Band V)		
	§24.232 (c)	Equivalent Isotropic Radiated Power (WCDMA Band II)		
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power (WCDMA Band IV)		
-	§24.232 (d)	Peak-to-Average Ratio	-	See Note
-	§2.1049 §22.917 (b) §24.238 (b) §27.53 (g)	Occupied Bandwidth (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	-	See Note
-	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Band Edge Measurement (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	-	See Note
-	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Conducted Emission (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	-	See Note
-	§2.1055 §22.355 §24.235 §27.54	Frequency Stability Temperature & Voltage	-	See Note
4.4	§2.1053 §22.917 (a) §24.238 (a) §27.53 (h)	Field Strength of Spurious Radiation (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	Pass	17.21 dB under the limit at 5723.000 MHz

Note: The certified module (model: FM350-GL) which supports normal mode and TX switching mode being integrated into a notebook computer. Spot check on both modes were performed and no degradation occur. Thus additionally reporting the spot check results in this report.

Declaration of Conformity:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
It's means measurement values may risk exceeding the limit of regulation standards, if measurement uncertainty is include in test results.
- The measurement uncertainty please refer to report "Uncertainty of Evaluation".

Comments and Explanations:

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Sheng Kuo

Report Producer: Ruby Zou

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	5G Module
Brand Name	Fibocom Wireless Inc.
Model Name	FM350-GL
FCC ID	ZMOFM350GLL
Sample 1	EUT with Host 1
Sample 2	EUT with Host 2
EUT supports Radios application	WCDMA/HSPA/LTE/5G NR/GNSS
EUT Stage	Production Unit

Remark:

1. The above EUT's information was declared by manufacturer.
2. Equipment: Fibocom FM350-GL tested inside of Lenovo Notebook Computer.

	Normal mode	TX switching mode
	TX/RX	TX/RX
Ant_0 (Main)	WCDMA : 2/4/5 LTE : 2/4/5/7/12/13/14/17/25/26/30/38/66/71 NR : 2/5/7/25/30/38/66/71	WCDMA : 5 LTE : 5/12/13/14/17/26/41/48/71 NR : 5/41/71/77/78
Ant_2 (MIMO2)	LTE : 41/48 NR : 41/77/78	WCDMA : 2/4 LTE : 2/4/7/25/30/38/66 NR : 2/7/25/30/38/66

The product was installed into Notebook Computer (Brand Name: Lenovo, Model Name: TP00128C) during test, and the host information was recorded in the following table.

Host Information	
Host 1	Host with Amphenol Antenna
Host 2	Host with JYT/NVC Antenna

WWAN Antenna Information				
Main Antenna	Manufacturer	Amphenol	Peak gain (dBi)	WCDMA Band II: 0.50 WCDMA Band IV: 0.95 WCDMA Band V: -0.43
	Part number	TKC114-16-000-C	Type	PIFA
	Manufacturer	JYT/NVC	Peak gain (dBi)	WCDMA Band II: -1.83 WCDMA Band IV: -1.18 WCDMA Band V: -2.02
	Part number	JYAAE0154HR	Type	PIFA
MIMO 2 Antenna	Manufacturer	Amphenol	Peak gain (dBi)	WCDMA Band II: 0.60 WCDMA Band IV: 1.00
	Part number	TKC113-16-000-C	Type	PIFA
	Manufacturer	JYT/NVC	Peak gain (dBi)	WCDMA Band II: -1.31 WCDMA Band IV: -3.23
	Part number	JYAAE0155HR	Type	PIFA

Remark: The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
Tx Frequency	WCDMA: Band V: 826.4 MHz ~ 846.6 MHz Band II: 1852.4 MHz ~ 1907.6 MHz Band IV: 1712.4 MHz ~ 1752.6 MHz
Rx Frequency	WCDMA: Band V: 871.4 MHz ~ 891.6 MHz Band II: 1932.4 MHz ~ 1987.6 MHz Band IV: 2112.4 MHz ~ 2152.6 MHz
Maximum Output Power to Antenna	WCDMA: <Main Antenna> Band V: 22.87 dBm Band II: 22.96 dBm Band IV: 23.30 dBm <MIMO 2 Antenna> Band II: 22.73 dBm Band IV: 23.00 dBm
Type of Modulation	WCDMA: BPSK (Uplink) HSDPA: 64QAM (Downlink) HSUPA: QPSK (Uplink)

1.3 Modification of EUT

No modifications made to the EUT during the testing.

1.4 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333
Test Site No.	Sporton Site No.
	TH03-HY (TAF Code: 1190)
Test Engineer	Cotty Hsu
Temperature (°C)	22.2~23.1
Relative Humidity (%)	51~56
Remark	The Conducted test item subcontracted to Sporton International Inc. EMC & Wireless Communications Laboratory

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010
Test Site No.	Sporton Site No.
	03CH13-HY
Test Engineer	Rain Lee, Jacky Hong and Mancy Chou
Temperature (°C)	20~26
Relative Humidity (%)	40~65

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW3786

1.5 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in Tablet Type (three orthogonal axis (X: flat, Y: portrait, Z: landscape)) and Notebook Type, and adjusting the measurement antenna orientation, following C63.26 exploratory test procedures and only the worst case emissions were reported in this report.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 9000 MHz for WCDMA Band V
2. 30 MHz to 18000 MHz for WCDMA Band IV
3. 30 MHz to 19100 MHz for WCDMA Band II


All modes, data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

Remark: All the radiated test cases were performed with Sample 1.

2.2 Connection Diagram of Test System

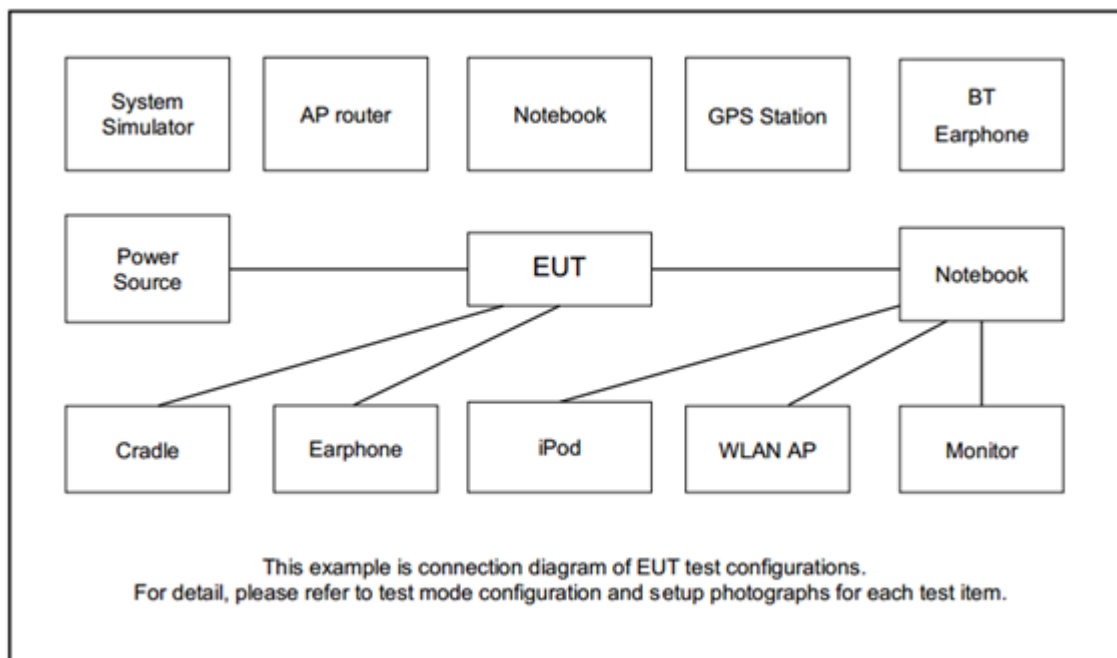

2.3 Support Unit used in test configuration

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
2.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
3.	Earphone	SONY	MH750	N/A	N/A	shielded,1.2m

2.4 Frequency List of Low/Middle/High Channels

Frequency List				
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest
WCDMA Band V	Channel	4132	4182	4233
	Frequency	826.4	836.4	846.6
WCDMA Band II	Channel	9262	9400	9538
	Frequency	1852.4	1880.0	1907.6
WCDMA Band IV	Channel	1312	1413	1513
	Frequency	1712.4	1732.6	1752.6

3 Conducted Test Result

3.1 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.1 Test Setup

3.1.2 Conducted Output Power



3.1.3 Test Result of Conducted Test

Please refer to Appendix A.

3.2 Conducted Output Power and ERP/EIRP

3.2.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for WCDMA Band V

The EIRP of mobile transmitters must not exceed 2 Watts for WCDMA Band II

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port is connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select the lowest, middle, and the highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.


4 Radiated Test Items

4.1 Measuring Instruments


Please refer to the measuring equipment list in this test report.

4.2 Test Setup


For radiated test below 30MHz

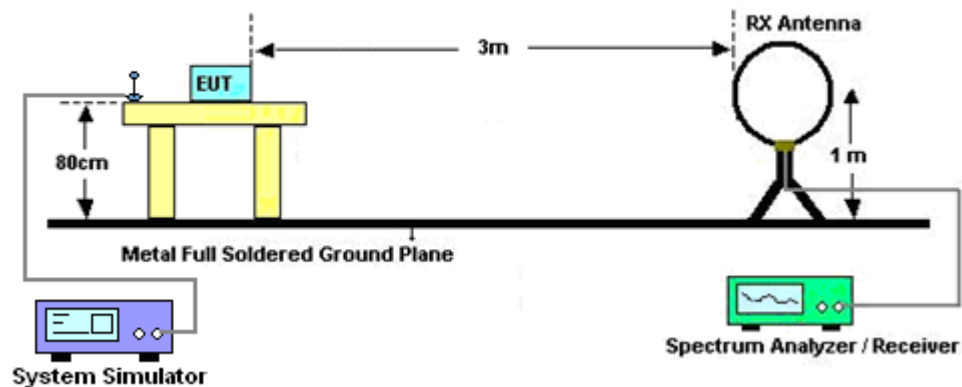


For radiated test from 30MHz to 1GHz

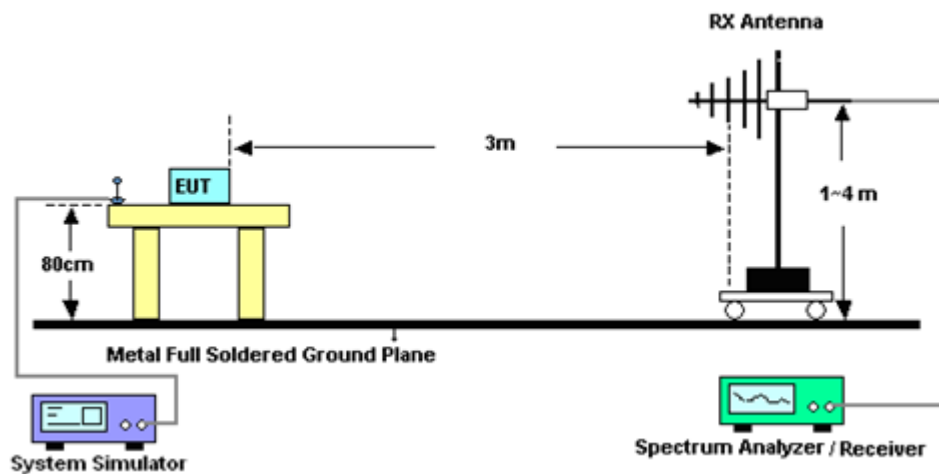

For radiated test from 1GHz to 18GHz

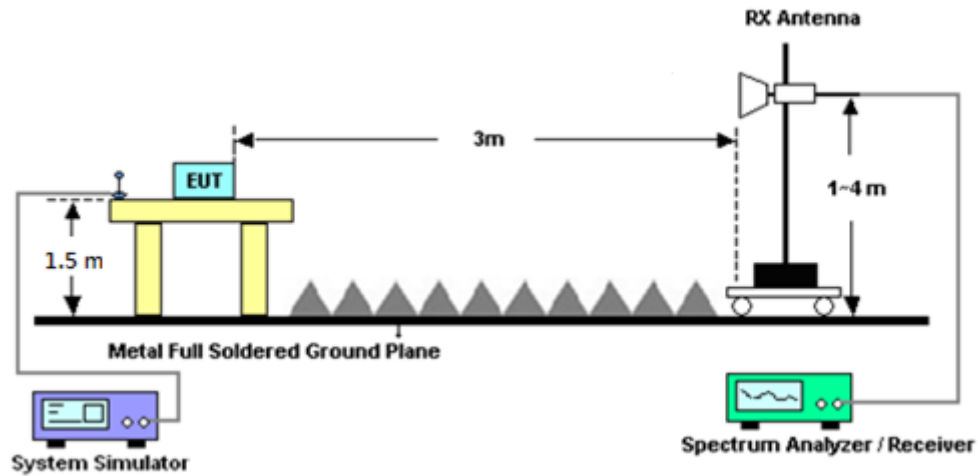

For radiated test above 18GHz

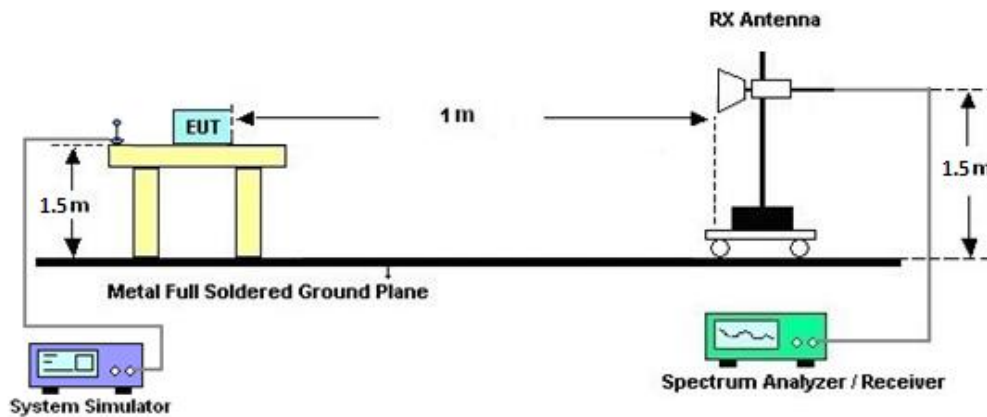

4.3 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

4.4 Field Strength of Spurious Radiation Measurement

4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT is placed on a rotatable wooden table 0.8 meters for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz above the ground.
2. The EUT is set 3 meters away from the receiving antenna, which is mounted on the antenna tower.
3. The table is rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1 MHz, VBW = 3 MHz, taking record of maximum spurious emission.
6. A horn antenna is substituted in place of the EUT and is driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Take the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency shall be excluded against the limit line in the operating frequency band.
13. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 20, 2022	Nov. 09, 2022~ Dec. 22, 2022	Sep. 19, 2023	Radiation (03CH13-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz~40GHz	Dec. 24, 2021	Nov. 09, 2022~ Dec. 22, 2022	Dec. 23, 2022	Radiation (03CH13-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA9170	1223	18GHz~40GHz	Jul. 05, 2022	Nov. 09, 2022~ Dec. 22, 2022	Jul. 04, 2023	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30MHz~40GHz	Feb. 21, 2022	Nov. 09, 2022~ Dec. 22, 2022	Feb. 20, 2023	Radiation (03CH13-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170576	18GHz~40GHz	May 14, 2022	Nov. 09, 2022~ Dec. 22, 2022	May 13, 2023	Radiation (03CH13-HY)
Amplifier	SONOMA	310N	187282	9kHz~1GHz	Dec. 15, 2021	Nov. 09, 2022~ Dec. 13, 2022	Dec. 14, 2022	Radiation (03CH13-HY)
Amplifier	SONOMA	310N	187282	9kHz~1GHz	Dec. 14, 2022	Dec. 14, 2022~ Dec. 22, 2022	Dec. 13, 2023	Radiation (03CH13-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	40103 & 07	30MHz~1GHz	Apr. 24, 2022	Nov. 09, 2022~ Dec. 22, 2022	Apr. 23, 2023	Radiation (03CH13-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	41912 & 05	30MHz~1GHz	Feb. 06, 2022	Nov. 09, 2022~ Dec. 22, 2022	Feb. 05, 2023	Radiation (03CH13-HY)
Hygrometer	TECEPEL	DTM-303B	TP140325	N/A	Nov. 07, 2022	Nov. 09, 2022~ Dec. 22, 2022	Nov. 06, 2023	Radiation (03CH13-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	1GHz~18GHz	May 17, 2022	Nov. 09, 2022~ Dec. 22, 2022	May 16, 2023	Radiation (03CH13-HY)
Preamplifier	Keysight	83017A	MY53270147	1GHz~26.5GHz	Oct. 25, 2022	Nov. 09, 2022~ Dec. 22, 2022	Oct. 24, 2023	Radiation (03CH13-HY)
Spectrum Analyzer	Keysight	N9010A	MY55370526	10Hz~44GHz	Mar. 18, 2022	Nov. 09, 2022~ Dec. 22, 2022	Mar. 17, 2023	Radiation (03CH13-HY)
Filter	Wainwright	WLK4-1000-15 30-8000-40SS	SN12	1.53GHz Low Pass Filter	Sep. 13, 2022	Nov. 09, 2022~ Dec. 22, 2022	Sep. 12, 2023	Radiation (03CH13-HY)
Filter	Wainwright	WHKX12-1080 -1200-15000-6 0SS	SN3	1.2GHz High Pass Filter	Jun. 30, 2022	Nov. 09, 2022~ Dec. 22, 2022	Jun. 29, 2023	Radiation (03CH13-HY)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 0SS	SN2	3GHz High Pass Filter	Jul. 12, 2022	Nov. 09, 2022~ Dec. 22, 2022	Jul. 11, 2023	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0030/126E	30MHz~18GHz	Feb. 09, 2022	Nov. 09, 2022~ Dec. 22, 2022	Feb. 08, 2023	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	804793/4	30MHz~18GHz	Feb. 09, 2022	Nov. 09, 2022~ Dec. 22, 2022	Feb. 08, 2023	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	9 kHz~30 MHz	Mar. 10, 2022	Nov. 09, 2022~ Dec. 22, 2022	Mar. 09, 2023	Radiation (03CH13-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24961/4	30MHz~18GHz	Feb. 09, 2022	Nov. 09, 2022~ Dec. 22, 2022	Feb. 08, 2023	Radiation (03CH13-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Nov. 09, 2022~ Dec. 22, 2022	N/A	Radiation (03CH13-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Nov. 09, 2022~ Dec. 22, 2022	N/A	Radiation (03CH13-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Nov. 09, 2022~ Dec. 22, 2022	N/A	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1241	1-18GHz	Jul. 25, 2022	Nov. 09, 2022~ Dec. 22, 2022	Jul. 24, 2023	Radiation (03CH13-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1212	1GHz~18GHz	Mar. 10, 2022	Nov. 09, 2022~ Dec. 22, 2022	Mar. 09, 2023	Radiation (03CH13-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Radio Communication Analyzer	Anritsu	MT8821C	6262025353	LTE FDD/TDD LTE-2CC DLCA/ULCA	Oct. 13, 2022	Nov. 23, 2022~ Dec. 27, 2022	Oct. 12, 2023	Conducted (TH03-HY)
Coupler	Warison	20dB 25W SMA Directional Coupler	#B	1-18GHz	Jan. 07, 2022	Nov. 23, 2022~ Dec. 27, 2022	Jan. 06, 2023	Conducted (TH03-HY)
Base Station (Measure)	Anritsu	MT8000A	6262134933	FR1	Jun. 13, 2022	Nov. 23, 2022~ Dec. 27, 2022	Jun. 12, 2023	Conducted (TH03-HY)

6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.40 dB
--	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.81 dB
--	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.46 dB
--	---------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power) & ERP / EIRP

<Main Antenna>

WCDMA Band V Maximum Average Power [dBm] (GT - LC = -0.43 dB)					
Channel	4132	4182	4233	ERP (dBm)	ERP (W)
Frequency	826.4	836.4	846.6		
RMC 12.2K	22.87	22.86	22.77	20.29	0.1069
Limit	ERP < 7W			Result	Pass

WCDMA Band II Maximum Average Power [dBm] (GT - LC = 0.5 dB)					
Channel	9262	9400	9538	EIRP (dBm)	EIRP (W)
Frequency	1852.4	1880	1907.6		
RMC 12.2K	22.89	22.95	22.96	23.46	0.2218
Limit	EIRP < 2W			Result	Pass

WCDMA Band IV Maximum Average Power [dBm] (GT - LC = 0.95 dB)					
Channel	1312	1413	1513	EIRP (dBm)	EIRP (W)
Frequency	1712.4	1732.6	1752.6		
RMC 12.2K	23.30	23.26	23.19	24.25	0.2661
Limit	EIRP < 1W			Result	Pass

**<MIMO 2 Antenna>**

WCDMA Band II Maximum Average Power [dBm] (GT - LC = 0.6 dB)					
Channel	9262	9400	9538	EIRP (dBm)	EIRP (W)
Frequency	1852.4	1880	1907.6		
RMC 12.2K	22.62	22.63	22.73	23.33	0.2153
Limit	EIRP < 2W			Result	Pass

WCDMA Band IV Maximum Average Power [dBm] (GT - LC = 1 dB)					
Channel	1312	1413	1513	EIRP (dBm)	EIRP (W)
Frequency	1712.4	1732.6	1752.6		
RMC 12.2K	22.90	23.00	22.95	24.00	0.2512
Limit	EIRP < 1W			Result	Pass



Appendix B. Test Results of Radiated Test

WCDMA 850 (Ant. Main)

WCDMA 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1652.4	-57.66	-13	-44.66	-73.02	-58.54	6.35	9.38	H
	2479.2	-52.30	-13	-39.30	-68.92	-52.48	8.07	10.40	H
	3305	-56.69	-13	-43.69	-75.94	-57.44	9.18	12.08	H
									H
									H
									H
	1652.4	-59.23	-13	-46.23	-74.58	-60.11	6.35	9.38	V
	2479.2	-56.60	-13	-43.60	-73.07	-56.78	8.07	10.40	V
	3305	-57.18	-13	-44.18	-76.52	-57.93	9.18	12.08	V
									V
									V
									V
Middle	1668	-56.95	-13	-43.95	-72.5	-57.86	6.38	9.44	H
	2510.4	-55.19	-13	-42.19	-71.86	-55.43	8.16	10.55	H
	3345	-56.79	-13	-43.79	-76.08	-57.67	9.27	12.30	H
									H
									H
									H
	1668	-58.62	-13	-45.62	-74.15	-59.53	6.38	9.44	V
	2509	-59.00	-13	-46.00	-75.5	-59.24	8.16	10.55	V
	3345	-56.75	-13	-43.75	-76.1	-57.63	9.27	12.30	V
									V
									V
									V



Highest	1691.4	-57.66	-13	-44.66	-73.5	-58.61	6.42	9.52	H
	2541.6	-52.71	-13	-39.71	-69.77	-53.17	8.10	10.71	H
	3386	-57.19	-13	-44.19	-76.53	-58.20	9.36	12.52	H
									H
									H
									H
	1691.4	-58.56	-13	-45.56	-74.36	-59.51	6.42	9.52	V
	2541.6	-57.07	-13	-44.07	-74.02	-57.53	8.10	10.71	V
	3386	-57.17	-13	-44.17	-76.54	-58.18	9.36	12.52	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**WCDMA 1900 (Ant. Main)**

WCDMA 1900									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3707	-54.68	-13	-41.68	-75.81	-56.84	9.95	12.11	H
	5557	-53.89	-13	-40.89	-77.22	-53.35	13.70	13.16	H
	7409	-46.69	-13	-33.69	-76.74	-44.08	13.99	11.38	H
									H
									H
									H
	3707	-54.76	-13	-41.76	-75.77	-56.92	9.95	12.11	V
	5557	-53.30	-13	-40.30	-77.19	-52.76	13.70	13.16	V
	7409	-46.56	-13	-33.56	-76.78	-43.95	13.99	11.38	V
									V
									V
									V
Middle	3763	-54.15	-13	-41.15	-75.39	-56.24	10.07	12.16	H
	5640	-53.38	-13	-40.38	-76.67	-52.73	13.89	13.24	H
	7520	-47.55	-13	-34.55	-77.01	-44.00	14.83	11.28	H
									H
									H
									H
	3763	-54.25	-13	-41.25	-75.45	-56.34	10.07	12.16	V
	5640	-53.15	-13	-40.15	-76.95	-52.50	13.89	13.24	V
	7520	-47.32	-13	-34.32	-76.86	-43.77	14.83	11.28	V
									V
									V
									V



Highest	3812	-54.10	-13	-41.10	-75.48	-56.14	10.18	12.22	H
	5722	-53.47	-13	-40.47	-76.96	-53.03	13.76	13.32	H
	7630	-47.38	-13	-34.38	-76.49	-43.92	15.08	11.62	H
									H
									H
									H
	3812	-54.19	-13	-41.19	-75.57	-56.23	10.18	12.22	V
	5722	-52.80	-13	-39.80	-76.81	-52.36	13.76	13.32	V
	7630	-47.21	-13	-34.21	-76.39	-43.75	15.08	11.62	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**WCDMA 1700 (Ant. Main)**

WCDMA 1700									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3427	-56.25	-13	-43.25	-76.58	-59.38	9.42	12.55	H
	5137	-53.03	-13	-40.03	-76.75	-53.59	12.11	12.67	H
	6849	-49.14	-13	-36.14	-77.56	-47.57	13.97	12.40	H
									H
									H
									H
	3427	-56.11	-13	-43.11	-76.44	-59.24	9.42	12.55	V
	5137	-52.82	-13	-39.82	-76.79	-53.38	12.11	12.67	V
	6849	-48.94	-13	-35.94	-77.19	-47.37	13.97	12.40	V
									V
									V
									V
Middle	3462	-55.75	-13	-42.75	-76.27	-58.77	9.46	12.48	H
	5197	-53.57	-13	-40.57	-77.43	-54.07	12.20	12.70	H
	6930	-48.59	-13	-35.59	-77	-46.65	14.02	12.08	H
									H
									H
									H
	3462	-55.77	-13	-42.77	-76.27	-58.79	9.46	12.48	V
	5197	-52.12	-13	-39.12	-76.21	-52.62	12.20	12.70	V
	6930	-48.74	-13	-35.74	-77	-46.80	14.02	12.08	V
									V
									V
									V



Highest	3504	-55.56	-13	-42.56	-76.29	-58.43	9.51	12.38	H
	5257	-53.92	-13	-40.92	-77.86	-54.34	12.45	12.87	H
	7010	-48.12	-13	-35.12	-76.54	-45.84	14.06	11.78	H
									H
									H
									H
	3504	-56.00	-13	-43.00	-76.67	-58.87	9.51	12.38	V
	5257	-53.28	-13	-40.28	-77.55	-53.70	12.45	12.87	V
	7010	-48.16	-13	-35.16	-76.5	-45.88	14.06	11.78	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**WCDMA 1900 (Ant. MIMO 2)**

WCDMA 1900									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3700	-43.93	-13	-30.93	-65.04	-46.10	9.93	12.10	H
	5562	-41.61	-13	-28.61	-64.92	-41.04	13.73	13.16	H
	7410	-44.29	-13	-31.29	-74.34	-41.67	14.00	11.38	H
									H
									H
									H
	3700	-41.05	-13	-28.05	-62.03	-43.22	9.93	12.10	V
	5555	-40.93	-13	-27.93	-64.82	-40.41	13.68	13.16	V
	7410	-39.79	-13	-26.79	-70.01	-37.17	14.00	11.38	V
									V
									V
									V
Middle	3763	-43.53	-13	-30.53	-64.77	-45.62	10.07	12.16	H
	5639	-33.53	-13	-20.53	-56.82	-32.88	13.89	13.24	H
	7520	-46.53	-13	-33.53	-75.99	-42.98	14.83	11.28	H
									H
									H
									H
	3756	-40.02	-13	-27.02	-61.19	-42.12	10.05	12.16	V
	5646	-35.62	-13	-22.62	-59.44	-34.99	13.88	13.25	V
	7515	-43.81	-13	-30.81	-73.37	-40.26	14.81	11.26	V
									V
									V
									V



Highest	3812	-45.42	-13	-32.42	-66.8	-47.46	10.18	12.22	H
	5723	-30.21	-13	-17.21	-53.7	-29.77	13.76	13.32	H
	7630	-47.00	-13	-34.00	-76.11	-43.54	15.08	11.62	H
									H
									H
									H
	3812	-39.79	-13	-26.79	-61.17	-41.83	10.18	12.22	V
	5723	-31.63	-13	-18.63	-55.64	-31.19	13.76	13.32	V
	7627	-45.03	-13	-32.03	-74.2	-41.54	15.10	11.61	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**WCDMA 1700 (Ant. MIMO 2)**

WCDMA 1700									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3427	-56.04	-13	-43.04	-76.37	-59.17	9.42	12.55	H
	5137	-52.68	-13	-39.68	-76.4	-53.24	12.11	12.67	H
	6849	-48.88	-13	-35.88	-77.3	-47.31	13.97	12.40	H
									H
									H
									H
	3427	-56.02	-13	-43.02	-76.35	-59.15	9.42	12.55	V
	5135	-49.15	-13	-36.15	-73.12	-49.71	12.11	12.67	V
	6849	-48.71	-13	-35.71	-76.96	-47.14	13.97	12.40	V
									V
									V
									V
Middle	3462	-55.83	-13	-42.83	-76.35	-58.85	9.46	12.48	H
	5197	-52.30	-13	-39.30	-76.16	-52.80	12.20	12.70	H
	6930	-48.49	-13	-35.49	-76.9	-46.55	14.02	12.08	H
									H
									H
									H
	3462	-55.33	-13	-42.33	-75.83	-58.35	9.46	12.48	V
	5198	-47.36	-13	-34.36	-71.46	-47.86	12.20	12.70	V
	6927	-48.71	-13	-35.71	-76.97	-46.78	14.02	12.09	V
									V
									V
									V



Highest	3504	-55.81	-13	-42.81	-76.54	-58.68	9.51	12.38	H
	5257	-53.27	-13	-40.27	-77.21	-53.69	12.45	12.87	H
	7010	-48.04	-13	-35.04	-76.46	-45.76	14.06	11.78	H
									H
									H
									H
	3504	-55.86	-13	-42.86	-76.53	-58.73	9.51	12.38	V
	5254	-50.46	-13	-37.46	-74.72	-50.88	12.44	12.86	V
	7010	-47.62	-13	-34.62	-75.96	-45.34	14.06	11.78	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.