




FM350R-GL

Hardware Guide

V1.0

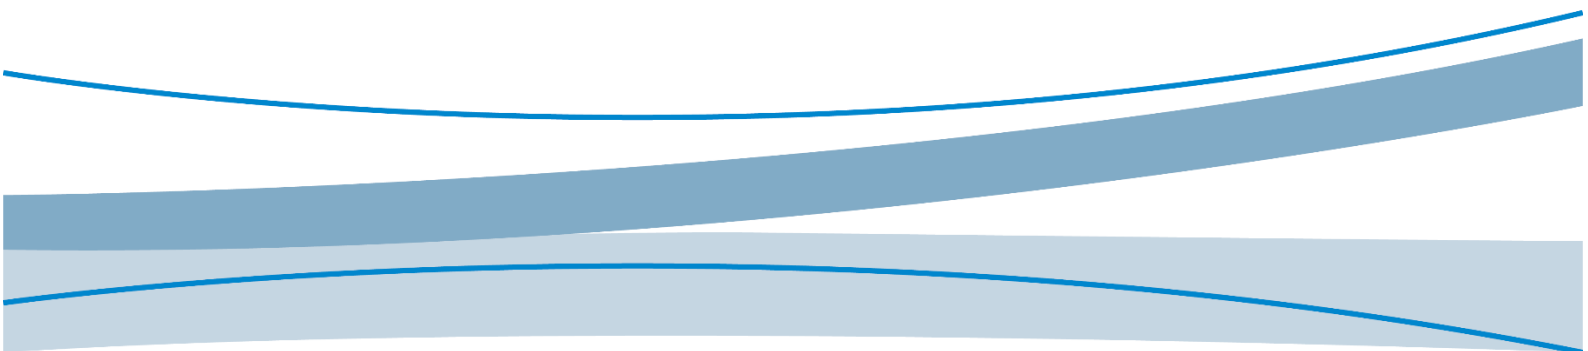

Copyright

Copyright ©2024 Fibocom Wireless Inc. All rights reserved.

Without the prior written permission of the copyright holder, any company or individual is prohibited to excerpt, copy any part of or the entire document, or transmit the document in any form.

Notice

The document is subject to update from time to time owing to the product version upgrade or other reasons. Unless otherwise specified, the document only serves as the user guide. All the statements, information and suggestions contained in the document do not constitute any explicit or implicit guarantee.

Trademark

 The trademark is registered and owned by Fibocom Wireless Inc.

Contact

Website: <https://www.fibocom.com/en/>

Address: Floor 10, Building A, Shenzhen International Innovation Valley, First Stone Road, Xili Community, Xili Street, Nanshan District, Shenzhen

Tel: +86 755-26733555

1 Foreword

1.1 Introduction

FM350R-GL (hereinafter referred to as FM350R) is a highly integrated 5G Sub-6 WWAN module which uses M.2 form factor interface. It supports GNSS and NR/LTE/WCDMA systems which can be applied to most cellular networks of mobile carrier in the world. When the host is in above OS mode, the module works in MBB mode. When the host is in below OS mode, the module can work in IOT mode.

This document describes the FM350R electrical characteristics and basic function.

1.2 Specification

1.2.1 RF Characteristics

FM350R RF characteristic is shown in Table 1.

Table 1. RF characteristics

Operating Band	
NR Sub-6	n1/2/3/5/7/8/12/14/20/25/26/28/30/38/40/41/48/66/71/77 ¹⁾ /78 ²⁾ /79
FDD-LTE	B1/2/3/4/5/7/8/12/13/14/17/18/19/20/25/26/28/29/30/32/66/71
TDD-LTE	B34/38/39/40/41/42/43/48
UMTS/HSPA+	B1/2/4/5/8
GNSS	GPS/GLONASS/Galileo/BDS/QZSS
Data Throughput	
Sub-6 SA Peak	DL 4.67Gbps/UL 1.25Gbps
Sub-6 NSA Peak	DL 3.74Gbps/UL 835Mbps
LTE Peak	DL 1.6Gbps (CAT19)/UL 211Mbps (CAT18)
UMTS/HSPA+ Peak	DL UMTS: 384 kbps/UL 384 kbps DL DC-HSPA+: 42 Mbps (CAT24)/UL 11.5 Mbps (CAT7)

Modulation Characteristic	
NR Sub6 Modulation	3GPP Release 15
	200MHz 2 DLCA, 256 QAM
	200MHz 2 ULCA, 256 QAM
	15KHz/30KHz SCS for FDD/TDD
LTE Modulation	3GPP Release 15
	100MHz 5 DLCA, 256 QAM
	40MHz 2 ULCA, 256 QAM
UMTS Modulation	3GPP Release 8
RF Characteristic	
HPUE ⁴⁾	n41/77/78/79
MIMO	NR DL 4x4 MIMO: n1/2/3/7/25/30/38/40/41/48/66/77/78/79
	LTE DL 4x4 MIMO: B1/2/3/4/7/25/30/38/40/41/42/43/48/66
SRS	n41/77/78/79
	1T2R/1T4R
Carrier Aggregation	
Sub-6 SA	DL 2CA, UL 2CA
Sub-6 NSA	DL LTE 5CA+ NR 1CA, LTE 3CA+ NR 2CA, UL LTE 2CA+ NR 1CA
LTE	DL 5CA, UL 2CA



- 1) Only enable 3450-3550MHz and 3700-3980MHz for FCC.
- 2) Only enable 3450-3550MHz and 3700-3800MHz for FCC.

1.2.2 Key Features

Table 2. Key features

Specification

CPU	MTK T700, 7nm process, ARM Cortex-A55, up to 1.5 GHz
Memory	4Gb LPDDR4X+4Gb NAND Flash
Supported OS	Windows 11/Chrome/Linux
Power Supply	DC 3.135V to 4.4V, typical 3.3V
Temperature	Normal operating temperature: -10°C to +55°C
	Extended operating temperature: -30°C to +75°C ¹⁾
	Storage temperature: -40°C to +85°C
Humidity	Operating relative humidity: <=95%
Physical Characteristics	Interface: M.2 Key-B
	Dimension: 30 mm x 52 mm x 2.3 mm
	Weight: TBD
Interface	
Antenna Connector	WWAN Antenna x 4
	Support 4x4 MIMO
Function Interface	Dual SIM (one embedded eSIM), 1.8V/3V
	PCIe Gen3 x1
	USB 2.0
	USB 3.1 Gen1
	W_Disable#
	SAR trigger
	LED
	MIPI/GPO for Tunable antenna
	I2C
Software	
Protocol Stack	IPV4/IPV6
AT Commands	3GPP TS 27.007
Firmware Update	PCIe or USB 2.0
Other Feature	Multiple carrier
	Windows update



- 3) When temperature goes beyond normal operating temperature range of -10°C to +55°C, RF performance of module may be slightly off 3GPP specifications.

2 FCC Conformance information

Federal Communication Commission Interference Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

This device is intended only for OEM integrators under the following conditions: (For module device use)

1) The antenna must be installed such that 20 cm is maintained between the antenna and users, and

2) The transmitter module may not be co-located with any other transmitter or antenna.

As long as 2 conditions above are met, further transmitter test will not be required.

However, the

OEM integrator is still responsible for testing their end-product for any additional compliance

requirements required with this module installed.

Important Notice to OEM integrators

1. This module is limited to OEM installation ONLY.

2. This module is limited to installation in mobile applications, according to Part 2.1091(b).

3. The separate approval is required for all other operating configurations, including portable configurations with respect to Part 2.1093 and different antenna configurations

4. For FCC Part 15.31 (h) and (k): The host manufacturer is responsible for additional testing to verify compliance as a composite system. When testing the host device for compliance with Part 15 Subpart B, the host manufacturer is required to show compliance with Part 15 Subpart B while the transmitter module(s) are installed and operating. The modules should be transmitting and the evaluation should confirm that the module's intentional emissions are compliant (i.e. fundamental and out of band emissions). The host manufacturer must verify that there are no additional unintentional emissions other than what is permitted in Part 15 Subpart B or emissions are complaint with the transmitter(s) rule(s).

The Grantee will provide guidance to the host manufacturer for Part 15 B requirements if needed.

Important Note

notice that any deviation(s) from the defined parameters of the antenna trace, as described by the instructions, require that the host product manufacturer must notify to Fibocom Wireless Inc. that they wish to change the antenna trace design. In this case, a Class II permissive change application is required to be filed by the USI, or the host manufacturer can take responsibility through the change in FCC ID (new application) procedure followed by a Class II permissive change application.

End Product Labeling

When the module is installed in the host device, the FCC label must be visible through a window on the final device or it must be visible when an access panel, door or cover is easily re-moved. If not, a second label must be placed on the outside of the final device that contains the following text: "Contains FCC ID: ZMOFM350RGL"

The FCC ID can be used only when all FCC compliance requirements are met.

Antenna Installation

- (1) The antenna must be installed such that 20 cm is maintained between the antenna and users,
- (2) The transmitter module may not be co-located with any other transmitter or antenna.
- (3) Only antennas of the same type and with equal or less gains as shown below may be used with this module. Other types of antennas and/or higher gain antennas may require additional authorization for operation.

In the event that these conditions cannot be met (for example certain laptop configurations or co-location with another transmitter), then the FCC authorization is no longer considered valid and the FCC ID cannot be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate FCC authorization.

Antenna information

Band	Gain(dBi)	Type	Band	Gain(dBi)	Type
WCDMA Band 2	4	PIFA/Molopole	LTE Band 48	1	PIFA/Molopole
WCDMA Band 4	3		LTE Band 66	3	
WCDMA Band 5	3		LTE Band 71	3	
LTE Band 2	4		5G NR Band 2	4	
LTE Band 4	3		5G NR Band 5	3	
LTE Band 5	3		5G NR Band 7	3	
LTE Band 7	3		5G NR Band 12	3	
LTE Band 12	3		5G NR Band 14	3	
LTE Band 13	3		5G NR Band 25	4	
LTE Band 14	3		5G NR Band 26	3	
LTE Band 17	3		5G NR Band 30	1	
LTE Band 25	4		5G NR Band 38	3	
LTE Band 26	3		5G NR Band 41	3	
LTE Band 30	1		5G NR Band 48	1	
LTE Band 38	3		5G NR Band 66	3	
LTE Band 41	3		5G NR Band 71	3	
LTE Band 42	3		5G NR Band 77	3	
LTE Band 43	3		5G NR Band 78	3	
LTE Band 42 (part96)	1				
LTE Band 43 (part96)	1				

Manual Information to the End User

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module. The end user manual shall include all required regulatory information/warning as show in this manual.

Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance **20** cm between the radiator & your body.

3 IC Conformance information

Industry Canada Statement

This device complies with Industry Canada's licence-exempt RSSs. Operation is subject to the following two conditions:

- (1) This device may not cause interference; and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement."

Radiation Exposure Statement

This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator & your body.

Déclaration d'exposition aux radiations:

Cet équipement est conforme aux limites d'exposition aux rayonnements ISED établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20 cm de distance entre la source de rayonnement et votre corps.

This device is intended only for OEM integrators under the following conditions: (For module device use)

- 1) The antenna must be installed such that 20 cm is maintained between the antenna and users, and
 - 2) The transmitter module may not be co-located with any other transmitter or antenna.
- As long as 2 conditions above are met, further transmitter test will not be required. However, the OEM integrator is still responsible for testing their end-product for any additional compliance requirements required with this module installed.

Cet appareil est conçu uniquement pour les intégrateurs OEM dans les conditions suivantes: (Pour utilisation de dispositif module)

- 1) L'antenne doit être installée de telle sorte qu'une distance de 20 cm est respectée entre l'antenne et les utilisateurs, et
 - 2) Le module émetteur peut ne pas être coïmplanté avec un autre émetteur ou antenne.
- Tant que les 2 conditions ci-dessus sont remplies, des essais supplémentaires sur l'émetteur ne seront pas nécessaires. Toutefois, l'intégrateur OEM est toujours responsable des essais sur son produit final pour toutes exigences de conformité supplémentaires requis pour ce module installé.

IMPORTANT NOTE:

In the event that these conditions cannot be met (for example certain laptop configurations or colocation with another transmitter), then the Canada authorization is no longer considered valid and the IC ID cannot be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate Canada authorization.

NOTE IMPORTANTE:

Dans le cas où ces conditions ne peuvent être satisfaites (par exemple pour certaines configurations

d'ordinateur portable ou de certaines co-localisation avec un autre émetteur), l'autorisation du Canada n'est plus considéré comme valide et l'ID IC ne peut pas être utilisé sur le produit final. Dans ces circonstances, l'intégrateur OEM sera chargé de réévaluer le produit final (y compris l'émetteur) et l'obtention d'une autorisation distincte au Canada.

End Product Labeling

This transmitter module is authorized only for use in device where the antenna may be installed such that 20 cm may be maintained between the antenna and users. The final end product must be labeled in a visible area with the following: "Contains IC:21374-FM350RGL".

Plaque signalétique du produit final

Ce module émetteur est autorisé uniquement pour une utilisation dans un dispositif où l'antenne peut être installée de telle sorte qu'une distance de 20cm peut être maintenue entre l'antenne et les utilisateurs. Le produit final doit être étiqueté dans un endroit visible avec l'inscription suivante: "Contient des IC:21374-FM350RGL ".

Manual Information To the End User

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module. The end user manual shall include all required regulatory information/warning as show in this manual.

Manuel d'information à l'utilisateur final

L'intégrateur OEM doit être conscient de ne pas fournir des informations à l'utilisateur final quant à la façon d'installer ou de supprimer ce module RF dans le manuel de l'utilisateur du produit final qui intègre ce module. Le manuel de l'utilisateur final doit inclure toutes les informations réglementaires requises et avertissements comme indiqué dans ce manuel.

4 CE Conformance information



The device could be used with a separation distance of 20cm to the human body.

Hereby, [Fibocom Wireless Inc.] declares that the radio equipment type [FM350R-GL] is in compliance with Directive 2014/53/EU.

4.1 Transmitting Power of EU bands

The transmitting power for each band of the RW350R module is shown in the following table:

RAT	Band	3GPP Requirement (dBm)	Tx Power (dBm)
WCDMA	Band 1	24+1.7/-3.7	23.5±1
	Band 8	24+1.7/-3.7	23.5±1
LTE	Band 1	23±2.7	23±1
	Band 3	23±2.7	23±1
	Band 7	23±2.7	23±1
	Band 8	23±2.7	23±1
	Band 20	23±2.7	23±1
	Band 28	23+2.7/-3.2	23±1
	Band 34	23±2.7	23±1
	Band 38	23±2.7	23±1
	Band 40	23±2.7	23±1
	Band 41	23±2.7	23±1
	Band 42	23+3/-4	23±1
	Band 43	23+3/-4	23±1
NR	n1	23±2.7	23±1
	n3	23±2.7	23±1
	n7	23±2.7	23±1

RAT	Band	3GPP Requirement (dBm)	Tx Power (dBm)
	n8	23±2.7	23±1
	n20	23±2.7	23±1
	n28	23+2.7/-3.2	23±1
	n38	23±2.7	23±1
	n40	23±2.7	23±1
	n41 (HPUE)	26+3/-4	26±1
	n41	23+3/-3	23±1
	n77 (HPUE)	26+3/-4	26±1
	n77	23+3/-4	23±1
	n78 (HPUE)	26+3/-4	26±1
	n78	23+3/-4	23±1



The max TX power is in primary RF path at ambient temperature 25°C.

5 NCC Conformance information

NCC Statement

減少電磁波影響，請妥適使用

Support WCDMA B1,B8/LTE B1,B3,B7,B8,B28,B38,B41/5G NR
n1,n3,n7,n8,n28,n38,n41,n78,n79

電波功率密度 MPE 標準值: _____ mW/cm²，送測產品實測值: _____mW/cm²，建議
使用時設備天線至少距離人體 20 公分。