



惠州硕贝德无线科技股份有限公司

Huizhou Speed Wireless Technology Co.,Ltd

Specifications For Main Antenna of Project Infrared Sphere 10

Customer/ Project	Infrared sphere 10	Frequency Band	700-960MHz 1710-2690MHz		
SCT P/N	F-0Y-31-0166-001-K0	Version	V1.1		
Date	2024.1.3				
SPEED					
Checked by	RF	TXJ	Designed by	RF	LXD
	ME	Nick		ME	Nick
	QC		Remark		
Customer					
Date					
Confirmed by	RF				
	ME				
Remark					

www.speed-hz.com

SPEED has possession of proprietary information provided in this presentation and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SPEED Wireless Technology.

Revised Records

Date	Revision version	Change Description	Author
20230717	V1.0	Initial version	LXD
20240103	V1.1	Update version	M Z

www.speed-hz.com

SPEED has possession of proprietary information provided in this presentation and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SPEED Wireless Technology

Contents

1 Project overview.....	4
2 Antenna Specification	5
3 Test Environment	6
4 Test Results	7
4.1 VSWR.....	7
4.2 Passive Efficiency and Gain	8
4.2 Pattern	8
5 Structure Diagram.....	9

www.speed-hz.com

SPEED has possession of proprietary information provided in this presentation and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SPEED Wireless Technology

1 Project Overview

This document is the specifications of the Infrared Sphere with Main antenna. The supported frequency band is 700-960MHz, 1710-2690Mhz.

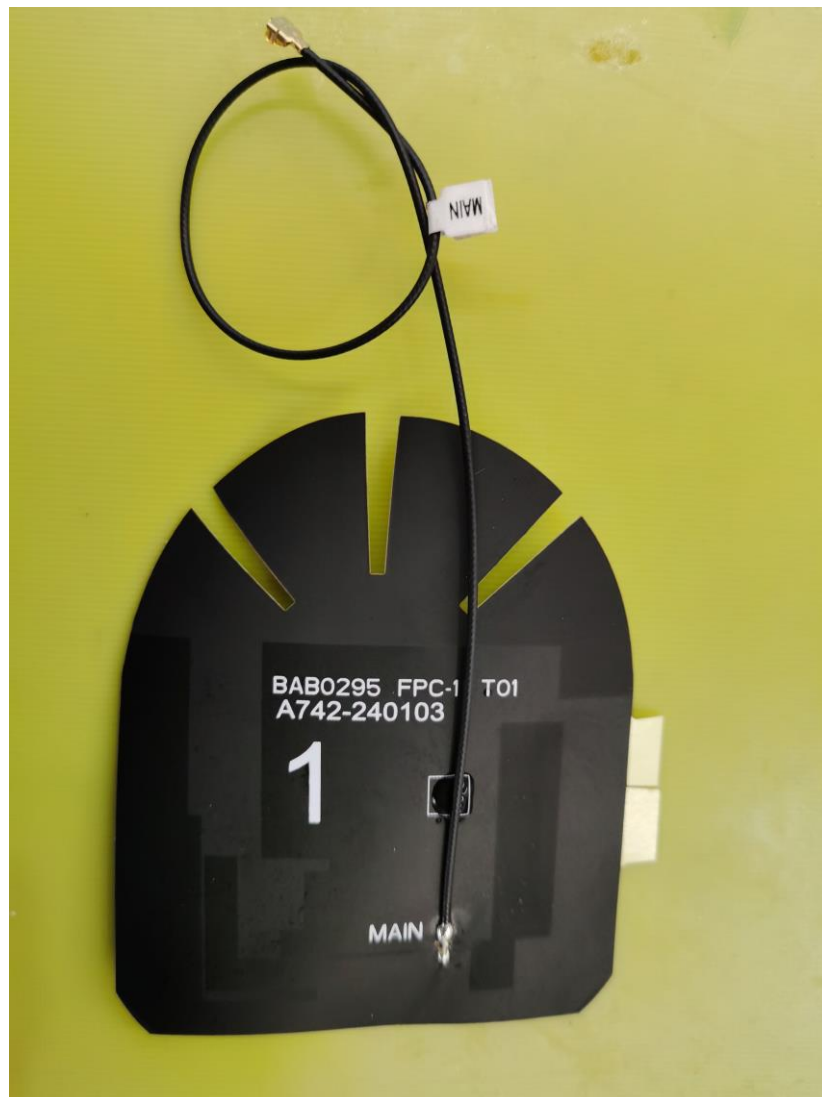


Figure1 Antenna picture

www.speed-hz.com

SPEED has possession of proprietary information provided in this presentation and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SPEED Wireless Technology

2 Antenna Specification

Antenna Form	FPC+CABLE+LABEL
Working Bands	700-960MHz 1710-2690MHz
Peak Gain	<4dBi
Efficiency	25%-71%
VSWR	<4
Impedance	50ohm
Polarization	Linear polarization
A/R	N/A
Radiation Pattern	Omnidirectional
Feed Mode	Cable
Power capacity	33dBm
Size(L*W*H)	79*65mm
Weight	N/A
Operating temperature	-30 °C to +80 °C
Storage temperature	-30 °C to +80 °C

www.speed-hz.com

SPEED has possession of proprietary information provided in this presentation and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SPEED Wireless Technology

3 Test Environment

The measuring equipment for antenna return loss, voltage standing wave ratio and isolation is Keysight E5071C vector network analyzer. As shown below:



Figure 2 Keysight E5071C vector network analyzer

The efficiency, gain, and pattern of the antenna are all tested in a dark room at Satimo, France. The darkroom uses 64 probes to electronically scan the antenna's radiation performance, collect data, and then analyze and organize it through a computer, which can provide antenna testing in the 400MHz to 8.5GHz frequency.



Figure3 Satimo Darkroom

www.speed-hz.com

SPEED has possession of proprietary information provided in this presentation and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SPEED Wireless Technology

4 Test Results

4.1 Return Loss

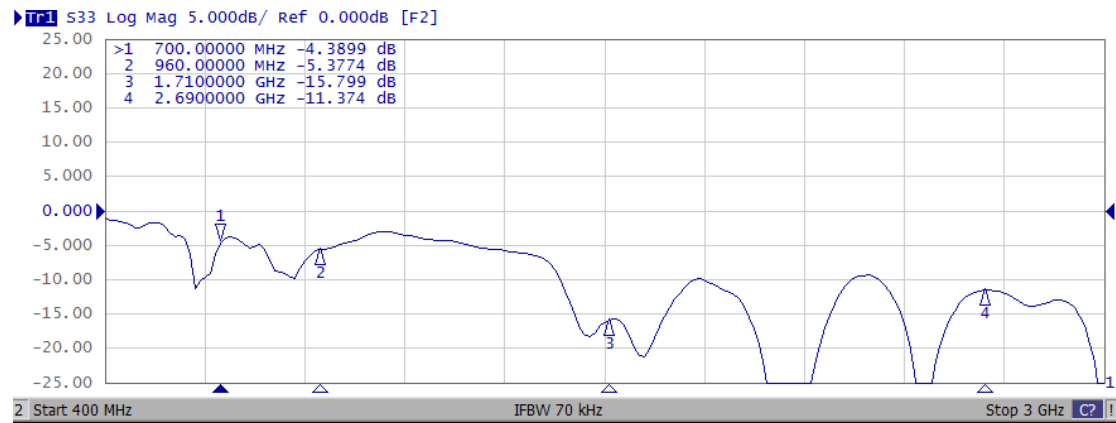


图 5 天线驻波图

www.speed-hz.com

SPEED has possession of proprietary information provided in this presentation and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SPEED Wireless Technology

4.2 Passive Efficiency and Gain


Fre	Effi.	Gain	Fre	Effi.	Gain	Fre	Effi.	Gain
700	31%	-0.05	1710	53%	3.55	2210	67%	4.62
710	28%	-0.02	1730	52%	3.60	2230	71%	4.66
720	26%	-0.10	1750	52%	3.26	2250	70%	4.46
730	26%	-0.02	1770	53%	3.18	2270	66%	4.05
740	28%	0.25	1790	53%	3.36	2290	63%	3.90
750	29%	0.19	1810	53%	3.51	2310	64%	4.00
760	31%	-0.50	1830	52%	3.39	2330	64%	4.09
770	34%	-0.63	1850	50%	3.42	2350	64%	4.26
780	39%	0.20	1870	50%	3.75	2370	61%	4.01
790	44%	0.70	1890	46%	3.44	2390	58%	3.87
800	42%	0.33	1910	42%	2.77	2410	58%	4.17
810	38%	-0.06	1930	39%	1.90	2430	62%	4.70
820	36%	-0.31	1950	40%	1.81	2450	65%	4.81
830	38%	0.69	1970	43%	1.98	2470	66%	4.73
840	38%	1.19	1990	48%	2.22	2490	67%	4.76
850	40%	1.55	2010	50%	2.47	2510	65%	4.67
860	40%	1.91	2030	47%	2.24	2530	63%	4.55
870	37%	1.95	2050	45%	2.23	2550	62%	4.55
880	36%	1.64	2070	45%	2.62	2570	62%	4.71
890	35%	1.33	2090	50%	3.54	2590	61%	4.44
900	32%	1.02	2110	54%	3.88	2610	58%	4.14
910	29%	0.77	2130	57%	3.94	2630	55%	3.85
920	27%	0.37	2150	58%	3.89	2650	54%	3.81
930	26%	0.07	2170	59%	3.85	2670	54%	3.92
940	25%	-0.07	2190	62%	4.28	2690	56%	4.49
950	25%	-0.15						
960	25%	-0.36						

Band	TRP	Band	TRP
FDD_B8	18.3	FDD_B2	19.84
	17.98		19.23
	17.96		18.3
FDD_B5	18.4	FDD_B4	19.35
	18.81		18.91
	18.76		19.86
FDD_B12	15.03	FDD_B7	19.56
	16.98		19.62
	16.56		19.42
FDD_B17	16.6	FDD_B1	19.49
	16.84		17.97
	16.54		19.03
FDD_B28	14.72	FDD_B3	19.49
	15.41		19.69
	14.63		20


www.speed-hz.com

SPEED has possession of proprietary information provided in this presentation and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SPEED Wireless Technology

4.3 Pattern

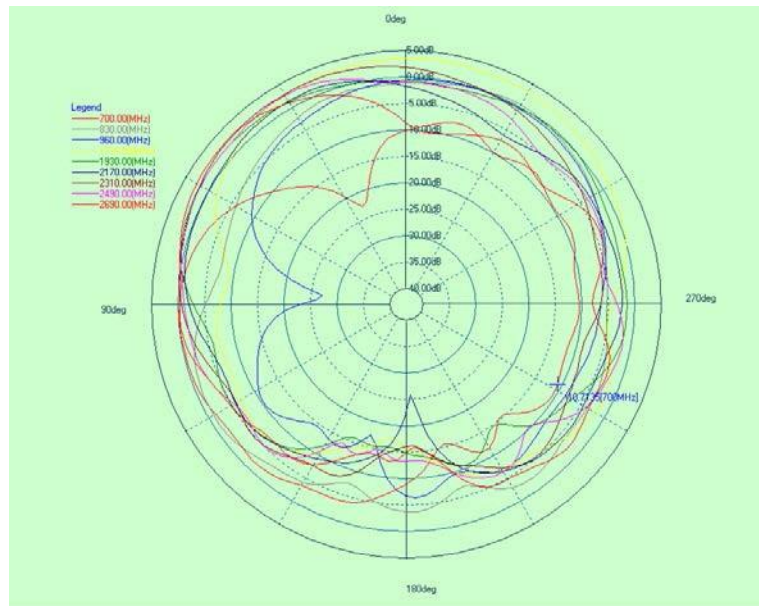


$\Phi = 0^\circ$

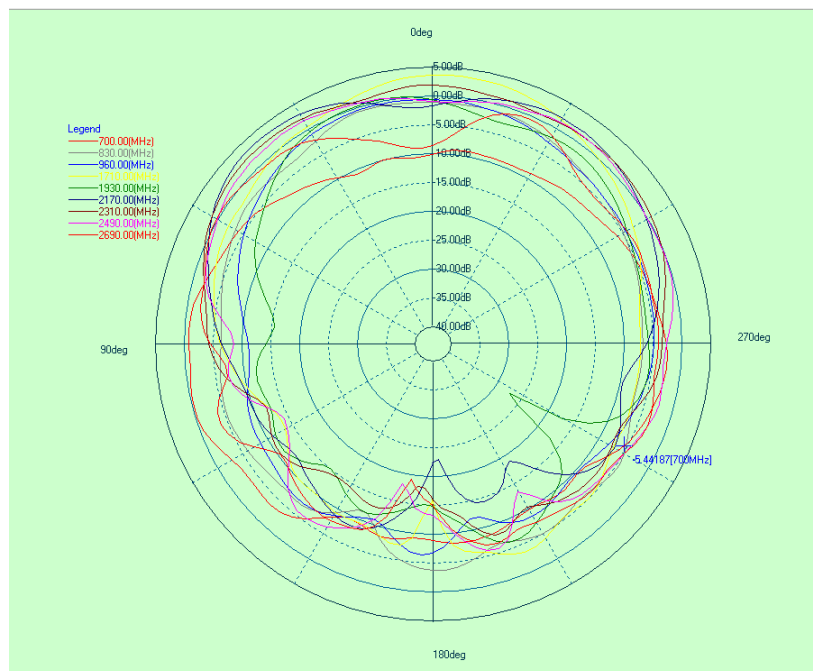


$\Phi = 90^\circ$

www.speed-hz.com

SPEED has possession of proprietary information provided in this presentation and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SPEED Wireless Technology

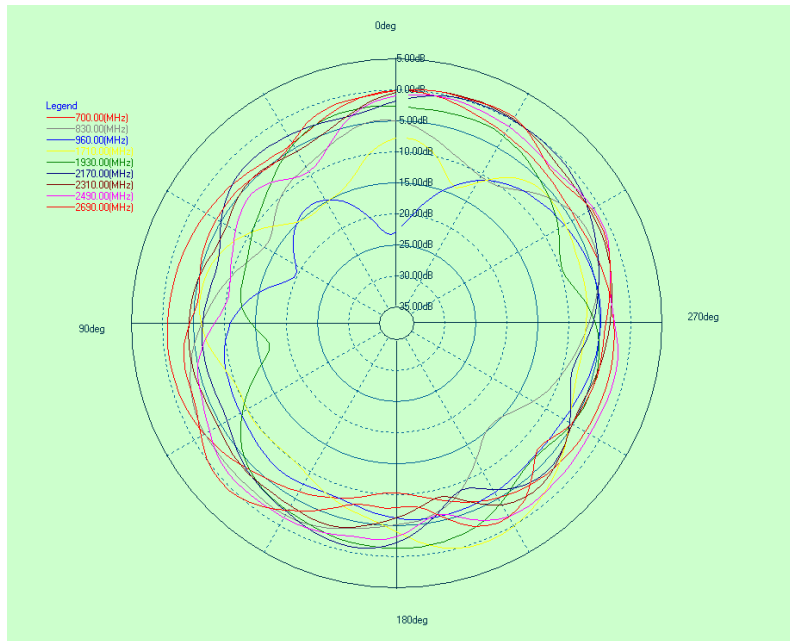

Theta=90°

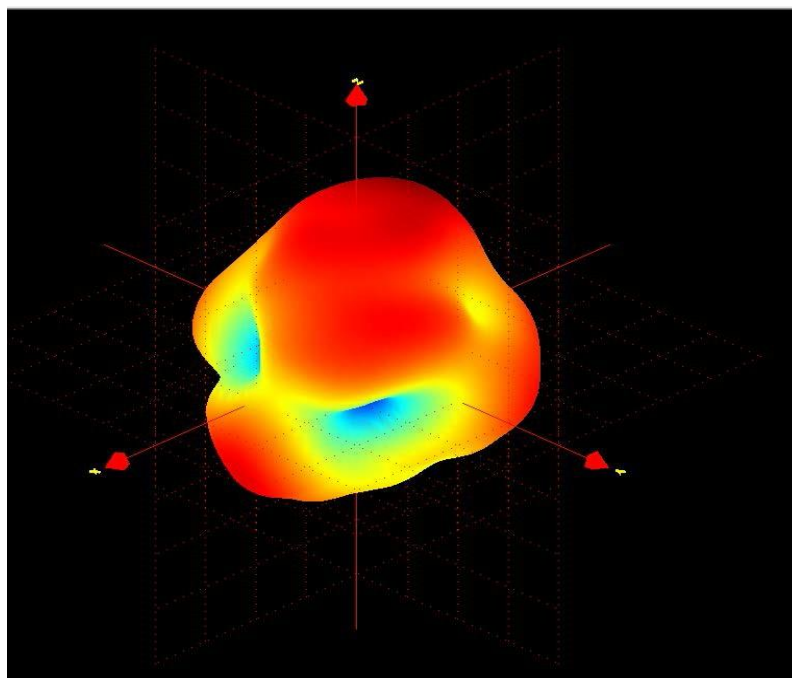


3D pattern


www.speed-hz.com

SPEED has possession of proprietary information provided in this presentation and this proprietary information shall be kept in strict confidence and not disclosed to any person or firm without the prior written consent of SPEED Wireless Technology

REVISION RECORD Please refer to sheet1 for details)				
Marks	QTY	Description	Name	Date

Title	ANTI	DRW.	MZ	Date	25/2/28
Project	BAB0295	CHK.		Date	
P/N	F-0Y-31-0166-001-K0	APP.		Date	
Material	FPC+CABLE+LABEL	REV.	S01	G/W	2 g
Scale	1:1	<i>Dimensions in mm</i>  All rights strictly reserved.			
Sheet	1 / 1				
Size	A3				

- NOTES:
1. THE DIMENSION MARKED WITH "*" IS THE KEY DIMENSION, NO TOLERANCE REFERENCE TABLE, NO DIMENSION REFERENCE 3D/2D
 2. SCRATCH OR COLLISION DAMAGES ON THE SURFACE ARE NOT ALLOWED; NEED TO REMOVE ALL BURRS AND SHARP EDGES, CLEAN THE OIL POLLUTION;
 3. ALL MATERIALS OF THE MODULE MUST MEET ROHS & REACH REQUIREMENTS.
 4. THE SOLDER JOINT IS SEALED WITH UV GLUE, AND THE ANTENNA MUST BE TESTED FOR AIR TIGHTNESS.

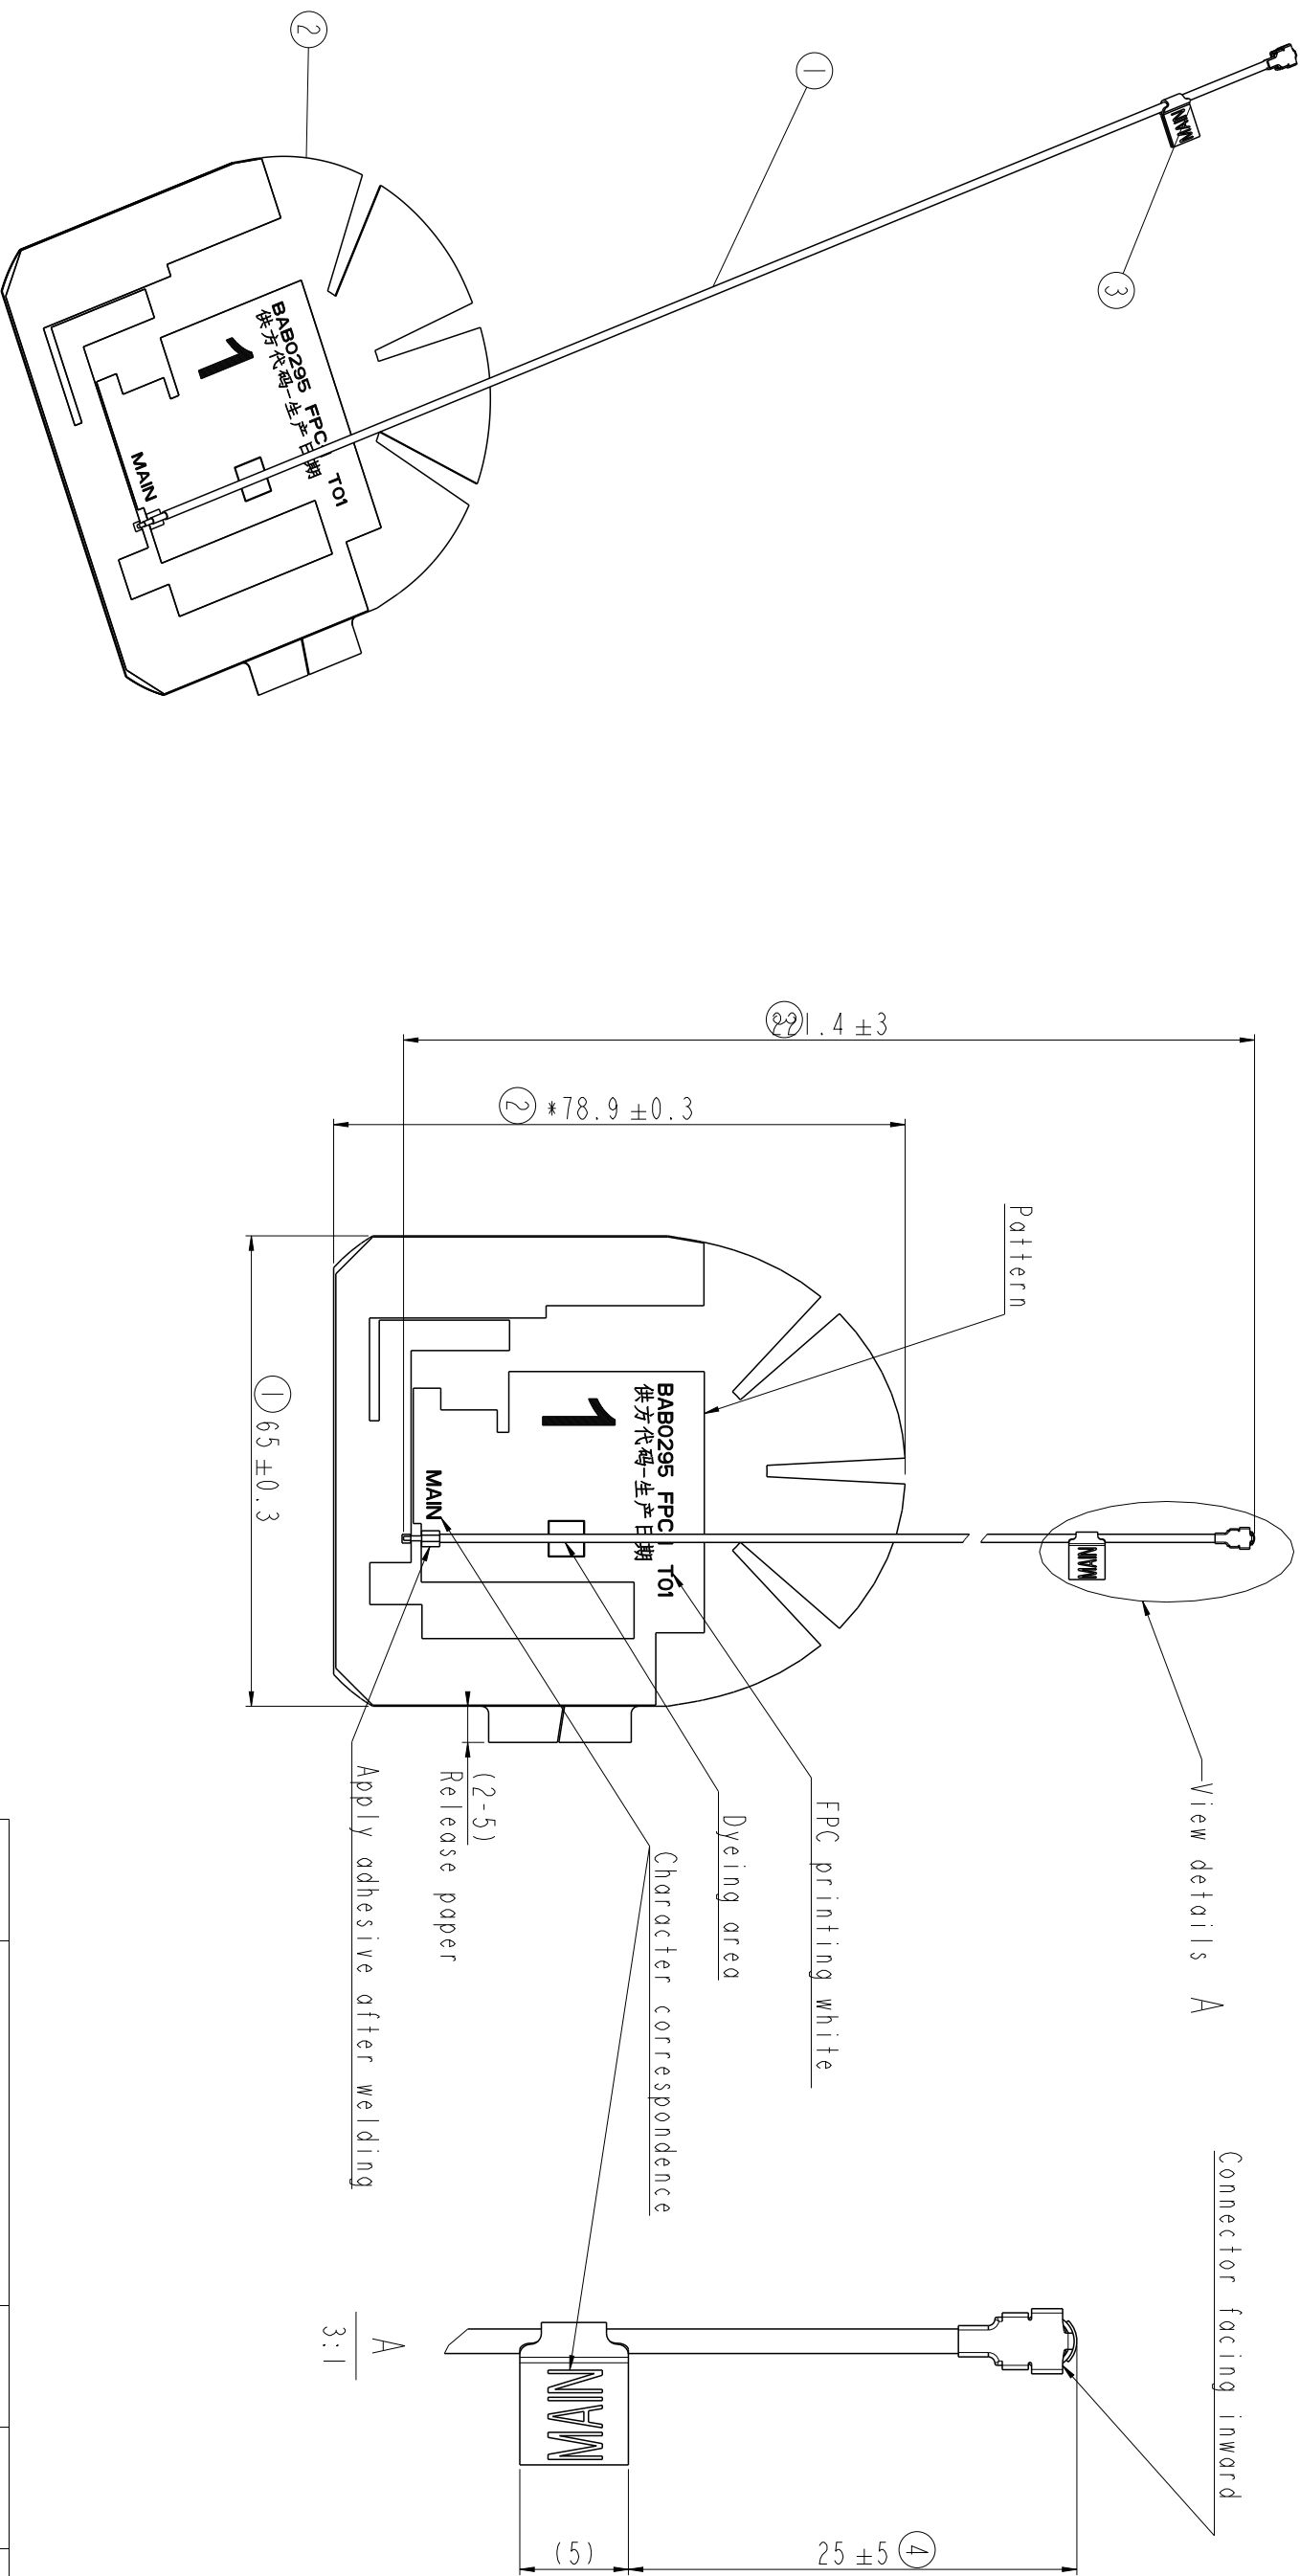

3	标签-MAIN	S-70-31-0077-003-W0	S01	1
2	FPC-1	M-Z3-31-0166-001-K0	S01	1
1	Cable-1	S-D1-31-0116-001-K0	S01	1
Index	Part	P/N	REV.	QTY

E

D

C

B

A

E

D

C

B

A

Recommended: SCT/QRF 7.3-48/A.2