



FCC Radio Test Report

FCC ID: ZMOSC208GL

This report concerns: Original Grant

Project No. : 2405G016
Equipment : LTE Module
Brand Name : Fibocom
Test Model : SC208-GL
Series Model : N/A
Applicant : Fibocom Wireless Inc.
Address : 1101, Tower A, Building 6, Shenzhen International Innovation Valley, Dashi 1st Rd, Nanshan, Shenzhen, China
Manufacturer : Fibocom Wireless Inc.
Address : 1101, Tower A, Building 6, Shenzhen International Innovation Valley, Dashi 1st Rd, Nanshan, Shenzhen, China
Factory : Fibocom Wireless Inc.
Address : 1101, Tower A, Building 6, Shenzhen International Innovation Valley, Dashi 1st Rd, Nanshan, Shenzhen, China
Date of Receipt : May 08, 2024
Date of Test : May 14, 2024 ~ Jul. 27, 2024
Issued Date : Aug. 20, 2024
Report Version : R00
Test Sample : Engineering Sample No.: SSL20240508106
Standard(s) : FCC CFR Title 47, Part 15, Subpart C

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

Prepared by : _____
Nick Chen

Approved by : _____
Chay Cai

Room 108, Building 2, No.1, Yile Road, Songshan Lake Zone, Dongguan City, Guangdong, People's Republic of China

Tel: +86-769-8318-3000 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents

| | Page |
|--|-------------|
| REPORT ISSUED HISTORY | 6 |
| 1 . APPLICABLE STANDARDS | 7 |
| 2 . SUMMARY OF TEST RESULTS | 7 |
| 2.1 TEST FACILITY | 8 |
| 2.2 MEASUREMENT UNCERTAINTY | 8 |
| 2.3 TEST ENVIRONMENT CONDITIONS | 9 |
| 3 . GENERAL INFORMATION | 10 |
| 3.1 GENERAL DESCRIPTION OF EUT | 10 |
| 3.2 DESCRIPTION OF TEST MODES | 11 |
| 3.3 PARAMETERS OF TEST SOFTWARE | 12 |
| 3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 13 |
| 3.5 SUPPORT UNITS | 13 |
| 3.6 CUSTOMER INFORMATION DESCRIPTION | 13 |
| 4 . AC POWER LINE CONDUCTED EMISSIONS | 14 |
| 4.1 LIMIT | 14 |
| 4.2 TEST PROCEDURE | 14 |
| 4.3 DEVIATION FROM TEST STANDARD | 14 |
| 4.4 TEST SETUP | 15 |
| 4.5 EUT OPERATING CONDITIONS | 15 |
| 4.6 TEST RESULTS | 15 |
| 5 . RADIATED EMISSIONS | 16 |
| 5.1 LIMIT | 16 |
| 5.2 TEST PROCEDURE | 17 |
| 5.3 DEVIATION FROM TEST STANDARD | 18 |
| 5.4 TEST SETUP | 18 |
| 5.5 EUT OPERATING CONDITIONS | 20 |
| 5.6 TEST RESULTS - 9 KHZ TO 30 MHZ | 20 |
| 5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ | 20 |
| 5.8 TEST RESULTS - ABOVE 1000 MHZ | 20 |
| 6 . NUMBER OF HOPPING FREQUENCY | 21 |
| 6.1 LIMIT | 21 |
| 6.2 TEST PROCEDURE | 21 |

Table of Contents

| | Page |
|---|-------------|
| 6.3 DEVIATION FROM STANDARD | 21 |
| 6.4 TEST SETUP | 21 |
| 6.5 EUT OPERATION CONDITIONS | 21 |
| 6.6 TEST RESULTS | 21 |
| 7 . AVERAGE TIME OF OCCUPANCY | 22 |
| 7.1 LIMIT | 22 |
| 7.2 TEST PROCEDURE | 22 |
| 7.3 DEVIATION FROM STANDARD | 22 |
| 7.4 TEST SETUP | 22 |
| 7.5 EUT OPERATION CONDITIONS | 22 |
| 7.6 TEST RESULTS | 22 |
| 8 . HOPPING CHANNEL SEPARATION | 23 |
| 8.1 LIMIT | 23 |
| 8.2 TEST PROCEDURE | 23 |
| 8.3 DEVIATION FROM STANDARD | 23 |
| 8.4 TEST SETUP | 23 |
| 8.5 EUT OPERATION CONDITIONS | 23 |
| 8.6 TEST RESULTS | 23 |
| 9 . BANDWIDTH | 24 |
| 9.1 LIMIT | 24 |
| 9.2 TEST PROCEDURE | 24 |
| 9.3 DEVIATION FROM STANDARD | 24 |
| 9.4 TEST SETUP | 24 |
| 9.5 EUT OPERATION CONDITIONS | 24 |
| 9.6 TEST RESULTS | 24 |
| 10 . MAXIMUM OUTPUT POWER | 25 |
| 10.1 LIMIT | 25 |
| 10.2 TEST PROCEDURE | 25 |
| 10.3 DEVIATION FROM STANDARD | 25 |
| 10.4 TEST SETUP | 25 |
| 10.5 EUT OPERATION CONDITIONS | 25 |
| 10.6 TEST RESULTS | 25 |
| 11 . CONDUCTED SPURIOUS EMISSION | 26 |
| 11.1 LIMIT | 26 |

Table of Contents

| | Page |
|--|-------------|
| 11.2 TEST PROCEDURE | 26 |
| 11.3 DEVIATION FROM STANDARD | 26 |
| 11.4 TEST SETUP | 26 |
| 11.5 EUT OPERATION CONDITIONS | 26 |
| 11.6 TEST RESULTS | 26 |
| 12 . MEASUREMENT INSTRUMENTS LIST | 27 |
| 13 . EUT TEST PHOTO | 29 |
| APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS | 35 |
| APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ | 38 |
| APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ | 43 |
| APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ | 46 |
| APPENDIX E - NUMBER OF HOPPING FREQUENCY | 59 |
| APPENDIX F - AVERAGE TIME OF OCCUPANCY | 61 |
| APPENDIX G - HOPPING CHANNEL SEPARATION | 66 |
| APPENDIX H - BANDWIDTH | 68 |
| APPENDIX I - MAXIMUM OUTPUT POWER | 70 |
| APPENDIX J - CONDUCTED SPURIOUS EMISSION | 73 |
| APPENDIX K - DECLARATION FOR BLUETOOTH DEVICE | 78 |

REPORT ISSUED HISTORY

| Report No. | Version | Description | Issued Date | Note |
|---------------------|---------|------------------|---------------|-------|
| BTL-FCCP-5-2405G016 | R00 | Original Report. | Aug. 20, 2024 | Valid |

1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of A2LA:

KDB 558074 D01 15.247 Meas Guidance v05r02

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

| FCC CFR Title 47, Part 15, Subpart C | | | | |
|--------------------------------------|-----------------------------------|--|----------|---------|
| Standard(s) Section | Test Item | Test Result | Judgment | Remark |
| 15.207 | AC Power Line Conducted Emissions | APPENDIX A | PASS | ----- |
| 15.247(d) 15.205(a) 15.209(a) | Radiated Emission | APPENDIX B APPENDIX C APPENDIX D | PASS | ----- |
| 15.247 (a)(1)(iii) | Number of Hopping Frequency | APPENDIX E | PASS | ----- |
| 15.247 (a)(1)(iii) | Average Time of Occupancy | APPENDIX F | PASS | ----- |
| 15.247(a)(1) | Hopping Channel Separation | APPENDIX G | PASS | ----- |
| 15.247(a)(1) | Bandwidth | APPENDIX H | PASS | ----- |
| 15.247(a)(1) | Maximum Output Power | APPENDIX I | PASS | ----- |
| 15.247(d) | Conducted Spurious Emission | APPENDIX J | PASS | ----- |
| 15.203 | Antenna Requirement | ----- | PASS | Note(2) |

Note:

- (1) "N/A" denotes test is not applicable in this test report
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Dalang, Dongguan City, Guangdong People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377

2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95.45% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

| Test Site | Method | Measurement Frequency Range | $U_{\text{,dB}}$ |
|-----------|--------|-----------------------------|------------------|
| DG-C02 | CISPR | 150kHz ~ 30MHz | 2.88 |

B. Radiated emissions test:

| Test Site | Method | Measurement Frequency Range | $U_{\text{,dB}}$ |
|-----------|--------|-----------------------------|------------------|
| DG-CB01 | CISPR | 9kHz ~ 30MHz | 2.36 |

| Test Site | Method | Measurement Frequency Range | Ant. H / V | $U_{\text{,dB}}$ |
|-----------------|--------|-----------------------------|------------|------------------|
| DG-CB03 (3m) | CISPR | 30MHz ~ 200MHz | V | 4.40 |
| | | 30MHz ~ 200MHz | H | 3.62 |
| | | 200MHz ~ 1,000MHz | V | 4.58 |
| | | 200MHz ~ 1,000MHz | H | 3.98 |

| Test Site | Method | Measurement Frequency Range | $U_{\text{,dB}}$ |
|-----------------|--------|-----------------------------|------------------|
| DG-CB03 (3m) | CISPR | 1GHz ~ 6GHz | 4.08 |
| | | 6GHz ~ 18GHz | 4.62 |

| Test Site | Method | Measurement Frequency Range | $U_{\text{,dB}}$ |
|-----------------|--------|-----------------------------|------------------|
| DG-CB03 (1m) | CISPR | 18 ~ 26.5 GHz | 3.36 |

C. Other Measurement:

| Test Item | Uncertainty |
|-----------------------------|-------------|
| Conducted Spurious Emission | 1.9 dB |
| Maximum Output Power | 1.3 dB |
| Bandwidth | 0.90 % |
| Temperature | 0.8 °C |
| Humidity | 2.2 % |

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

2.3 TEST ENVIRONMENT CONDITIONS

| Test Item | Temperature | Humidity | Test Voltage | Tested By | Test Date |
|---------------------------------------|-------------|----------|--------------|-------------|-------------------------------|
| AC Power Line Conducted Emissions | 26°C | 52% | AC 120V/60Hz | Hayden Chen | May 17, 2024 |
| Radiated Emissions-9 kHz to 30 MHz | 24°C | 56% | DC 3.8V | Hayden Chen | May 23, 2024 |
| Radiated Emissions-30 MHz to 1000 MHz | 24°C | 56% | DC 3.8V | Terry Deng | May 21, 2024 |
| Radiated Emissions-Above 1000 MHz | 22-24°C | 53-56% | DC 3.8V | Allen Tong | May 31, 2024 Jun. 18, 2024 |
| Number of Hopping Frequency | 23°C | 58% | DC 3.8V | Parker Yang | May 27, 2024 |
| Average Time of Occupancy | 23°C | 58% | DC 3.8V | Parker Yang | May 27, 2024 |
| Hopping Channel Separation | 23°C | 58% | DC 3.8V | Parker Yang | May 27, 2024 |
| Bandwidth | 23°C | 58% | DC 3.8V | Parker Yang | May 27, 2024 |
| Maximum Output Power | 23°C | 58% | DC 3.8V | Parker Yang | May 27, 2024 |
| Conducted Spurious Emission | 23°C | 58% | DC 3.8V | Parker Yang | May 27, 2024 |

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

| | |
|-------------------------|---|
| Equipment | LTE Module |
| Brand Name | Fibocom |
| Test Model | SC208-GL |
| Series Model | N/A |
| Model Difference(s) | N/A |
| Hardware Version | V1.0 |
| Software Version | SC208-GL-U16.00.026 |
| Power Source | DC voltage supplied from external power supply. |
| Power Rating | DC 3.5V - 4.35V, Typical: 3.8V |
| Operation Frequency | 2402 MHz ~ 2480 MHz |
| Modulation Type | GFSK, π/4-DQPSK, 8-DPSK |
| Bit Rate of Transmitter | 1Mbps, 2Mbps, 3Mbps |
| Max. Output Power | 2Mbps: 8.69 dBm (0.0074 W) |

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|---------|-----------------|
| 00 | 2402 | 27 | 2429 | 54 | 2456 |
| 01 | 2403 | 28 | 2430 | 55 | 2457 |
| 02 | 2404 | 29 | 2431 | 56 | 2458 |
| 03 | 2405 | 30 | 2432 | 57 | 2459 |
| 04 | 2406 | 31 | 2433 | 58 | 2460 |
| 05 | 2407 | 32 | 2434 | 59 | 2461 |
| 06 | 2408 | 33 | 2435 | 60 | 2462 |
| 07 | 2409 | 34 | 2436 | 61 | 2463 |
| 08 | 2410 | 35 | 2437 | 62 | 2464 |
| 09 | 2411 | 36 | 2438 | 63 | 2465 |
| 10 | 2412 | 37 | 2439 | 64 | 2466 |
| 11 | 2413 | 38 | 2440 | 65 | 2467 |
| 12 | 2414 | 39 | 2441 | 66 | 2468 |
| 13 | 2415 | 40 | 2442 | 67 | 2469 |
| 14 | 2416 | 41 | 2443 | 68 | 2470 |
| 15 | 2417 | 42 | 2444 | 69 | 2471 |
| 16 | 2418 | 43 | 2445 | 70 | 2472 |
| 17 | 2419 | 44 | 2446 | 71 | 2473 |
| 18 | 2420 | 45 | 2447 | 72 | 2474 |
| 19 | 2421 | 46 | 2448 | 73 | 2475 |
| 20 | 2422 | 47 | 2449 | 74 | 2476 |
| 21 | 2423 | 48 | 2450 | 75 | 2477 |
| 22 | 2424 | 49 | 2451 | 76 | 2478 |
| 23 | 2425 | 50 | 2452 | 77 | 2479 |
| 24 | 2426 | 51 | 2453 | 78 | 2480 |
| 25 | 2427 | 52 | 2454 | | |
| 26 | 2428 | 53 | 2455 | | |

3. Table for Filed Antenna:

| Ant. | Manufacturer | P/N | Antenna Type | Connector | Gain (dBi) |
|------|---|----------|--------------|------------|------------|
| 1 | Shenzhen Bogesi Communication Technology Co., Ltd | GHT-019A | Dipole | SMA Male J | 3.02 |

3.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

| Pretest Mode | Description |
|--------------|--------------------------------|
| Mode 1 | TX Mode_1Mbps Channel 00/39/78 |
| Mode 2 | TX Mode_2Mbps Channel 00/39/78 |
| Mode 3 | TX Mode_3Mbps Channel 00/39/78 |
| Mode 4 | TX Mode_2Mbps Channel 00 |

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

| AC power line conducted emissions test | |
|---|--------------------------|
| Final Test Mode | Description |
| Mode 4 | TX Mode_2Mbps Channel 00 |

| Radiated emissions test - Below 1GHz | |
|---|--------------------------|
| Final Test Mode | Description |
| Mode 4 | TX Mode_2Mbps Channel 00 |

| Radiated emissions test - Above 1GHz | |
|---|--------------------------------|
| Final Test Mode | Description |
| Mode 1 | TX Mode_1Mbps Channel 00/39/78 |
| Mode 3 | TX Mode_3Mbps Channel 00/39/78 |

| Maximum Output Power | |
|-----------------------------|--------------------------------|
| Final Test Mode | Description |
| Mode 1 | TX Mode_1Mbps Channel 00/39/78 |
| Mode 2 | TX Mode_2Mbps Channel 00/39/78 |
| Mode 3 | TX Mode_3Mbps Channel 00/39/78 |

| Other Conducted test | |
|-----------------------------|--------------------------------|
| Final Test Mode | Description |
| Mode 1 | TX Mode_1Mbps Channel 00/39/78 |
| Mode 3 | TX Mode_3Mbps Channel 00/39/78 |

Note:


- (1) The measurements for Output Power were tested with DH1/3/5 during 1Mbps, 2Mbps and 3Mbps, the worst case were 1Mbps (DH5) and 3Mbps (3DH5), only worst case were documented for other test items except Average Time of Occupancy.
- (2) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (3) This product has the mode of BT AFH, which was considered during testing. 800/20/X(X = 2 of DH1, X = 4 of DH3 or X = 6 of DH5) with 20, 10 or 6.67 hops per second in a channel, and then multiply 0.4*20 (20 # of hopping). But this mode is not the worst case mode as duration of the packet is same, and this report only shows the worst case mode.
- (4) For AC power line conducted emissions and radiated spurious emissions below 1 GHz test, the 2Mbps Channel 00 is found to be the worst case and recorded.
- (5) For radiated emission Harmonic 18-26.5GHz test, only tested the worst case and recorded.
- (6) For radiated emission above 1 GHz test, the polarization of Vertical and Horizontal are evaluated, the worst case is Vertical and recorded.

3.3 PARAMETERS OF TEST SOFTWARE

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

| Test Software Version | QRCT | | |
|-----------------------|------|------|------|
| Frequency (MHz) | 2402 | 2441 | 2480 |
| 1Mbps | 8 | 8 | 8 |
| 2Mbps | 9 | 9 | 9 |
| 3Mbps | 9 | 9 | 9 |

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED



3.5 SUPPORT UNITS

| Item | Equipment | Brand | Model No. | Series No. |
|------|-----------------|-------|-----------|---------------|
| A | DC Power Source | UNI-T | UDP6721 | AWP7224050031 |

| Item | Cable Type | Shielded Type | Ferrite Core | Length |
|------|------------|---------------|--------------|--------|
| 1 | DC Cable | NO | NO | 1m |
| 2 | AC Cable | NO | NO | 1m |

3.6 CUSTOMER INFORMATION DESCRIPTION

- 1) The antenna gain is provided by the manufacturer.
- 2) Except for AC power line conducted emissions and radiated emissions, the results of all test items include cable losses. All cable losses are provided by the testing laboratory.

4. AC POWER LINE CONDUCTED EMISSIONS

4.1 LIMIT

| Frequency of Emission (MHz) | Limit (dB μ V) | |
|-----------------------------|--------------------|-----------|
| | Quasi-peak | Average |
| 0.15 - 0.5 | 66 to 56* | 56 to 46* |
| 0.5 - 5.0 | 56 | 46 |
| 5.0 - 30.0 | 60 | 50 |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.


The following table is the setting of the receiver:

| Receiver Parameters | Setting |
|---------------------|----------|
| Start Frequency | 0.15 MHz |
| Stop Frequency | 30 MHz |
| IF Bandwidth | 9 kHz |

4.3 DEVIATION FROM TEST STANDARD

No deviation.

4.4 TEST SETUP

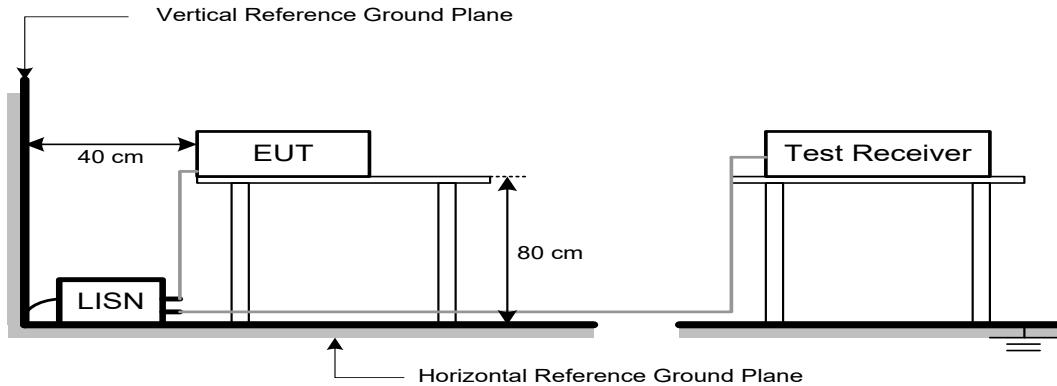

4.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical function (as a customer would normally use it), EUT was programmed to be in continuously transmitting data or hopping on mode.

4.6 TEST RESULTS

Please refer to the APPENDIX A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』 . If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform in this case, a "*" marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150 kHz to 30 MHz.

5. RADIATED EMISSIONS

5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009-0.490 | 2400/F(kHz) | 300 |
| 0.490-1.705 | 24000/F(kHz) | 30 |
| 1.705-30.0 | 30 | 30 |
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

| Frequency (MHz) | Band edge/ Harmonic at 3m (dB μ V/m) | | Harmonic at 1m (dB μ V/m) | |
|-----------------|--|---------|-------------------------------|---------------|
| | Peak | Average | Peak | Average |
| Above 1000 | 74 | 54 | 83.5 (Note 4) | 63.5 (Note 4) |

Note:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dB μ V/m)=20log Emission level (uV/m).
- (4)

$$FS_{\text{limit}} = FS_{\text{max}} - 20 \log \left(\frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

$$20 \log (d_{\text{limit}}/d_{\text{measure}}) = 20 \log (3/1) = 9.5 \text{ dB.}$$

FS_{limit} : Harmonic at 3m Peak and Average limit.

FS_{max} : Harmonic at 1m Peak and Average Maximum value.

d_{limit} : Harmonic at 3m test distance.

d_{measure} : Harmonic Actual test distance.

5.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- b. The measuring distance of 3 m or 1m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

| Spectrum Parameters | Setting |
|------------------------|---------------------------------|
| Start ~ Stop Frequency | 9 kHz~150 kHz for RBW 200 Hz |
| Start ~ Stop Frequency | 0.15 MHz~30 MHz for RBW 9 kHz |
| Start ~ Stop Frequency | 30 MHz~1000 MHz for RBW 100 kHz |

| Spectrum Parameters | Setting |
|--|--|
| Start Frequency | 1000 MHz |
| Stop Frequency | 10th carrier harmonic |
| RBW / VBW (Emission in restricted band) | 1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value |


| Spectrum Parameters | Setting |
|------------------------|-------------------------------------|
| Start ~ Stop Frequency | 9 kHz~90 kHz for PK/AVG detector |
| Start ~ Stop Frequency | 90 kHz~110 kHz for QP detector |
| Start ~ Stop Frequency | 110 kHz~490 kHz for PK/AVG detector |
| Start ~ Stop Frequency | 490 kHz~30 MHz for QP detector |
| Start ~ Stop Frequency | 30 MHz~1000 MHz for QP detector |
| Start ~ Stop Frequency | 1 GHz~26.5 GHz for PK/AVG detector |

5.3 DEVIATION FROM TEST STANDARD


No deviation.



5.4 TEST SETUP


9 kHz to 30 MHz

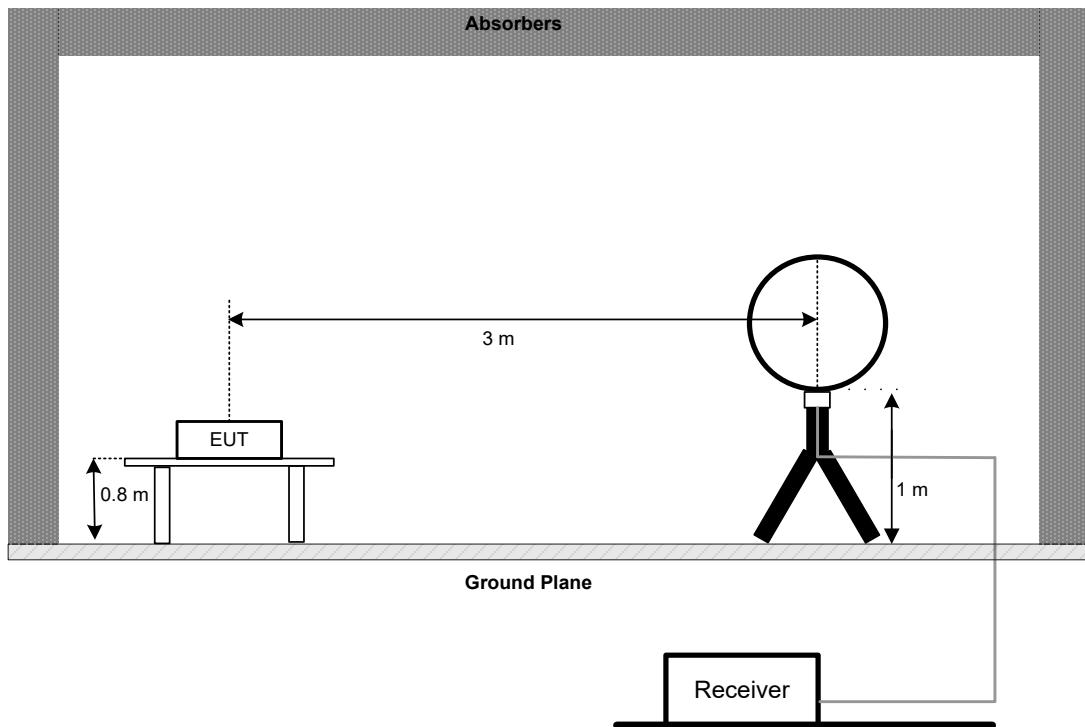

30 MHz to 1 GHz

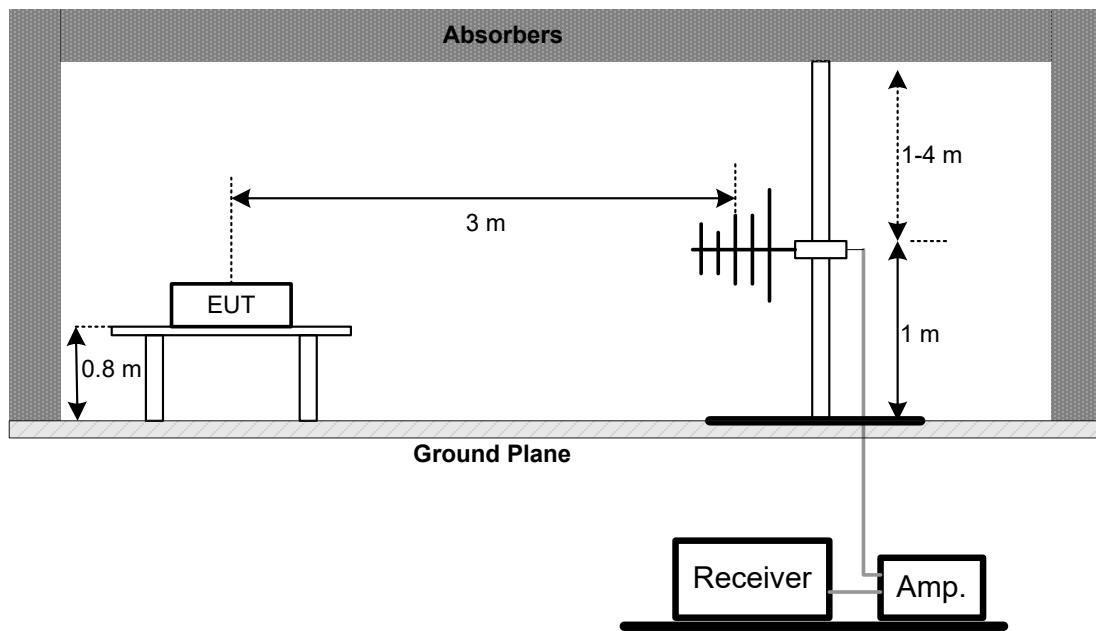

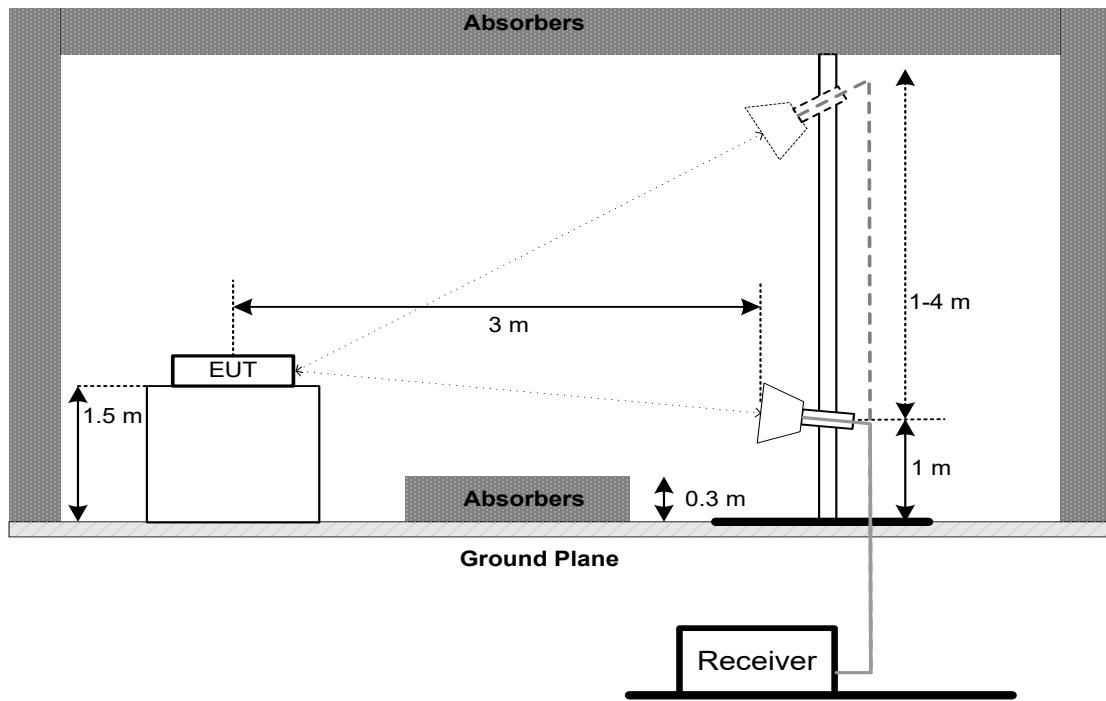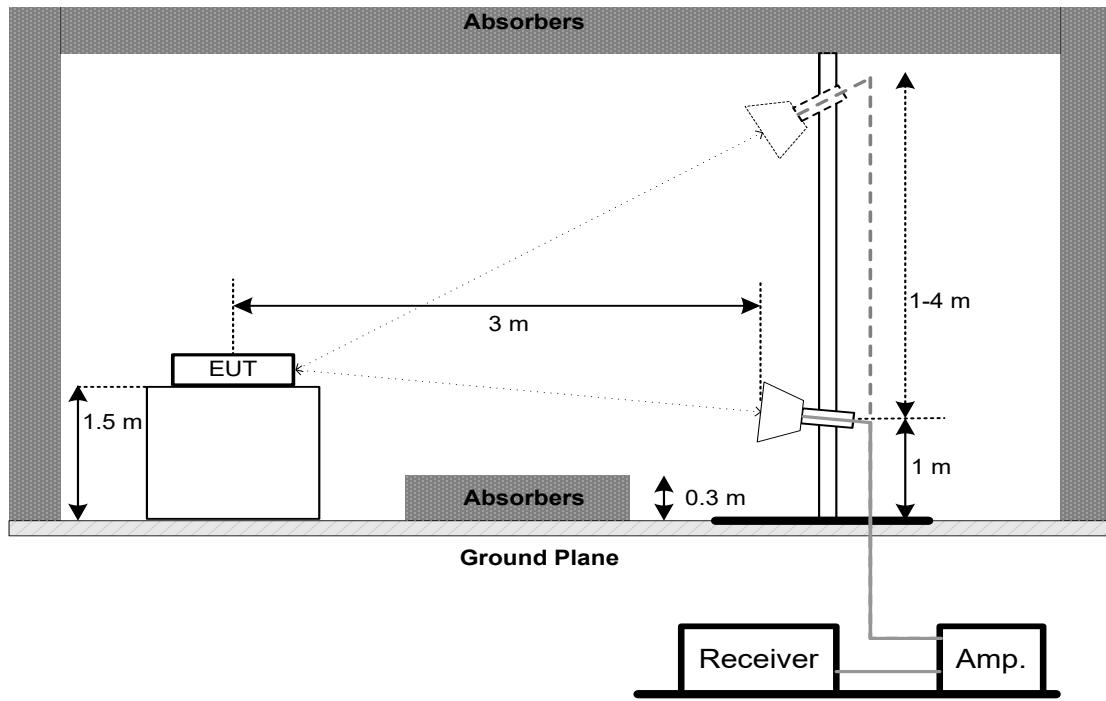Above 1 GHz
Band edge**Harmonic (1 GHz to 18 GHz)**

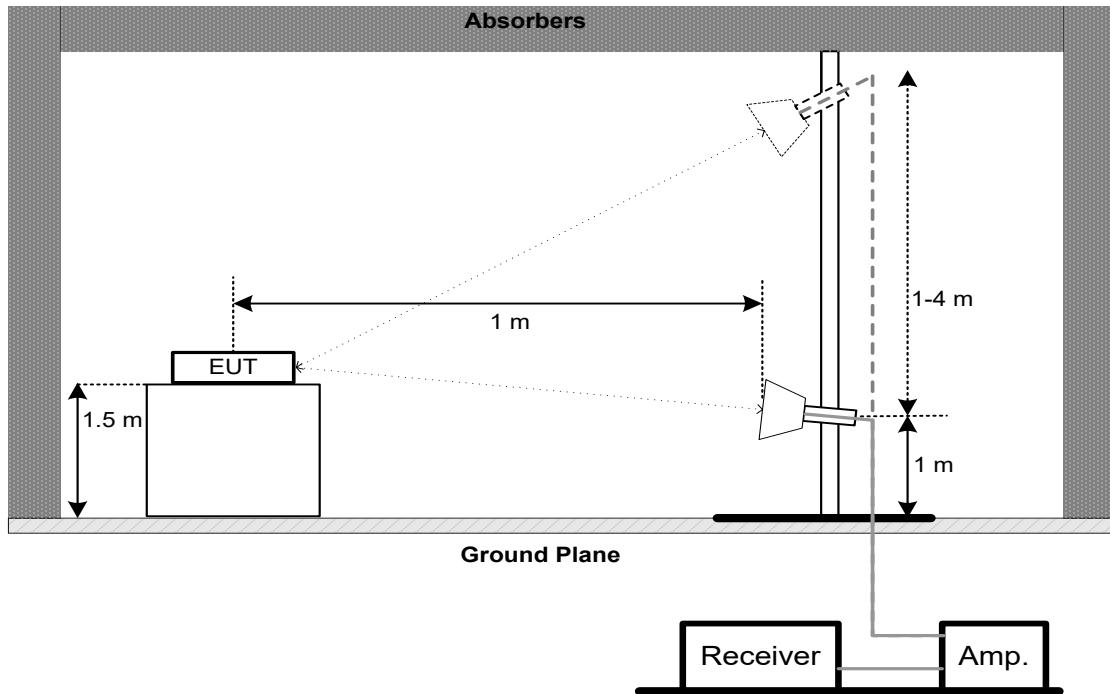Harmonic (18 GHz to 26.5 GHz)**5.5 EUT OPERATING CONDITIONS**

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS - 9 kHz TO 30 MHz

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

5.7 TEST RESULTS - 30 MHz TO 1000 MHz

Please refer to the APPENDIX C.

5.8 TEST RESULTS - ABOVE 1000 MHz

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

6. NUMBER OF HOPPING FREQUENCY

6.1 LIMIT

| Section | Test Item | Limit |
|-----------------------|-----------------------------|-------|
| FCC 15.247(a)(1)(iii) | Number of Hopping Frequency | 15 |

6.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

| Spectrum Parameters | Setting |
|---------------------|-----------------------------|
| Span Frequency | > Operating Frequency Range |
| RBW | 100 kHz |
| VBW | 100 kHz |
| Detector | Peak |
| Trace | Max Hold |
| Sweep Time | Auto |

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX E.

7. AVERAGE TIME OF OCCUPANCY

7.1 LIMIT

| Section | Test Item | Limit |
|-----------------------|---------------------------|--------|
| FCC 15.247(a)(1)(iii) | Average Time of Occupancy | 0.4sec |

7.2 TEST PROCEDURE

- a. Set the EUT for DH1, DH3 and DH5 packet transmitting.
- b. Measure the maximum time duration of one single pulse.
- c. DH1 Packet permit maximum $1600 / 79 / 2 = 10.12$ hops per second in each channel (1 time slot TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds.
- d. DH3 Packet permit maximum $1600 / 79 / 4 = 5.06$ hops per second in each channel (3 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds.
- e. DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds.
- f. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- g. The following table is the setting of the spectrum analyzer:

| Spectrum Parameters | Setting |
|---------------------|---|
| Span Frequency | 0 MHz |
| RBW | 1 MHz |
| VBW | 1 MHz |
| Detector | Peak |
| Trace | Max Hold |
| Sweep Time | As necessary to capture the entire dwell time per hopping channel |

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX F.

8. HOPPING CHANNEL SEPARATION

8.1 LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

8.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. The following table is the setting of the spectrum analyzer:

| Spectrum Parameters | Setting |
|---------------------|---|
| Span Frequency | Wide enough to capture the peaks of two adjacent channels |
| RBW | 30 kHz |
| VBW | 100 kHz |
| Detector | Peak |
| Trace | Max Hold |
| Sweep Time | Auto |

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX G.

9. BANDWIDTH

9.1 LIMIT

| Section | Test Item |
|------------------|-----------|
| FCC 15.247(a)(1) | Bandwidth |

9.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

| Spectrum Parameters | Setting |
|---------------------|-------------------------|
| Span Frequency | > Measurement Bandwidth |
| RBW | 30 kHz |
| VBW | 100 kHz |
| Detector | Peak |
| Trace | Max Hold |
| Sweep Time | Auto |

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP



9.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

9.6 TEST RESULTS

Please refer to the APPENDIX H.

10. MAXIMUM OUTPUT POWER

10.1 LIMIT

| Section | Test Item | Limit |
|------------------|----------------------|--------------------------|
| FCC 15.247(a)(1) | Maximum Output Power | 0.1250 Watt or 20.97 dBm |

Note: Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

10.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

| Spectrum Parameters | Setting |
|---------------------|--|
| Span Frequency | Approximately five times the 20 dB bandwidth, centered on a hopping channel. |
| RBW | 3 MHz |
| VBW | 3 MHz |
| Detector | Peak |
| Trace | Max Hold |
| Sweep Time | Auto |

10.3 DEVIATION FROM STANDARD

No deviation.

10.4 TEST SETUP



10.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

10.6 TEST RESULTS

Please refer to the APPENDIX I.

11. CONDUCTED SPURIOUS EMISSION

11.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

11.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

| Spectrum Parameters | Setting |
|---------------------|----------|
| Start Frequency | 30 MHz |
| Stop Frequency | 26.5 GHz |
| RBW | 100 kHz |
| VBW | 100 kHz |
| Detector | Peak |
| Trace | Max Hold |
| Sweep Time | Auto |

11.3 DEVIATION FROM STANDARD

No deviation.

11.4 TEST SETUP



11.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

11.6 TEST RESULTS

Please refer to the APPENDIX J.

12. MEASUREMENT INSTRUMENTS LIST

| AC Power Line Conducted Emissions | | | | | |
|-----------------------------------|----------------------|--------------|-----------------------|---------------|------------------|
| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
| 1 | EMI TEST RECEIVER | R&S | ESCI | 100382 | Dec. 22, 2024 |
| 2 | TWO-LINE V-NETWORK | R&S | ENV216 | 10274 | Dec. 22, 2024 |
| 3 | TWO-LINE V-NETWORK | R&S | ENV216 | 101447 | Dec. 22, 2024 |
| 4 | Measurement Software | Farad | EZ-EMC Ver.NB-03A1-01 | N/A | N/A |
| 5 | Cable | N/A | SFT205-NMNM-9M -001 | 9M | Nov. 27, 2024 |
| 6 | DC power supply | UNI-T | UDP6721 | AWP7224050031 | Mar. 20, 2025 |

| Radiated Emissions - 9 kHz to 30 MHz | | | | | |
|--------------------------------------|----------------------|--------------|------------------------|---------------|------------------|
| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
| 1 | Active Loop Antenna | Schwarzbeck | FMZB 1513-60B | 1513-60 B-034 | Mar. 30, 2025 |
| 2 | MXE EMI Receiver | Keysight | N9038A | MY56400091 | Dec. 22, 2024 |
| 3 | Cable | N/A | RW2350-3.8A-NMB M-1.5M | N/A | Jun. 09, 2025 |
| 4 | Measurement Software | Farad | EZ-EMC Ver.NB-03A1-01 | N/A | N/A |
| 5 | 966 Chamber room | ETS | 9*6*6 | N/A | Jul. 11, 2024 |
| 6 | DC power supply | UNI-T | UDP6721 | AWP7224050031 | Mar. 20, 2025 |

| Radiated Emissions - 30 MHz to 1 GHz | | | | | |
|--------------------------------------|--------------------------|----------------|--------------------|---------------|------------------|
| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
| 1 | Trilog-Broadband Antenna | Schwarzbeck | VULB 9168 | 1462 | Dec. 13, 2024 |
| 2 | Attenuator | EMC INSTRUMENT | EMCI-N-6-06 | AT-06009 | Dec. 13, 2024 |
| 3 | Preamplifier | EMC INSTRUMENT | EMC001330 | 980863 | Apr. 07, 2025 |
| 4 | Cable | RegalWay | LMR400-NMNM-12 .5m | N/A | Jun. 06, 2025 |
| 5 | Cable | RegalWay | LMR400-NMNM-3 m | N/A | Jun. 06, 2025 |
| 6 | Cable | RegalWay | LMR400-NMNM-0. 5m | N/A | Jun. 06, 2025 |
| 7 | Receiver | Agilent | N9038A | MY52130039 | Dec. 22, 2024 |
| 8 | Positioning Controller | MF | MF-7802 | N/A | N/A |
| 9 | DC power supply | UNI-T | UDP6721 | AWP7224050031 | Mar. 20, 2025 |

| Radiated Emissions - Above 1 GHz | | | | | |
|----------------------------------|-----------------------------|------------------|-----------------------------|---------------|------------------|
| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
| 1 | Receiver | Agilent | N9038A | MY52130039 | Dec. 22, 2024 |
| 2 | Preamplifier | EMC INSTRUMENT | EMC118A45SE | 980888 | Nov. 17, 2024 |
| 3 | MXA Signal Analyzer | KEYSIGHT | N9020B | MY63380204 | Nov. 17, 2024 |
| 4 | Double Ridged Guide Antenna | ETS | 3115 | 75789 | Jun. 15, 2025 |
| 5 | Cable | RegalWay | A81-SMAMSMAM-12.5M | N/A | Aug. 08, 2024 |
| 6 | Cable | RegalWay | RWLP50-4.0A-SMS M-9M | N/A | Jan. 22, 2025 |
| 7 | Cable | RegalWay | RWLP50-2.6A-3.5 M2.92MRA-3M | N/A | Jan. 22, 2025 |
| 8 | Cable | RegalWay | RWLP50-4.0A-SMS M-12.5M | N/A | Feb. 19, 2025 |
| 9 | Cable | RegalWay | RWLP50-4.0A-NM RASM-2.5M | N/A | Aug. 08, 2024 |
| 10 | Cable | RegalWay | RWLP50-4.0A-NM RASMRA-0.8M | N/A | Aug. 08, 2024 |
| 11 | Receiver | Agilent | N9038A | MY52130039 | Dec. 22, 2024 |
| 12 | 966 Chamber room | CM | 9*6*6 | N/A | May 19, 2025 |
| 13 | Attenuator | Talent Microwave | TA10A2-S-18 | N/A | N/A |
| 14 | Filter | STI | STI15-9912 | N/A | May 31, 2025 |
| 15 | Positioning Controller | MF | MF-7802 | N/A | N/A |
| 16 | Measurement Software | Farad | EZ-EMC Ver.NB-03A1-01 | N/A | N/A |
| 17 | DC power supply | UNI-T | UDP6721 | AWP7224050031 | Mar. 20, 2025 |



**Number of Hopping Frequency &
Average Time of Occupancy &
Hopping Channel Separation &
Bandwidth &
Maximum Output Power &
Conducted Spurious Emission**



| Item | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
|------|----------------------|------------------|--------------------|---------------|------------------|
| 1 | Spectrum Analyzer | R&S | FSP40 | 100185 | Jun. 16, 2024 |
| 2 | Attenuator | Talent Microwave | TA10A0-S-26.5 | N/A | N/A |
| 3 | DC Block | N/A | N/A | N/A | N/A |
| 4 | Measurement Software | BTL | BTL Conducted Test | N/A | N/A |
| 5 | Attenuator | Talent Microwave | TA10A0-S-26.5 | N/A | N/A |
| 6 | DC power supply | UNI-T | UDP6721 | AWP7224050031 | Mar. 20, 2025 |
| 7 | Spectrum Analyzer | R&S | FSP38 | 100852 | Jun. 16, 2024 |
| 8 | Cable | Woke | S02-181212-064 | N/A | N/A |


Remark "N/A" denotes no model name, serial no. or calibration specified.



All calibration period of equipment list is one year.



13. EUT TEST PHOTO**AC Power Line Conducted Emissions Test Photos**

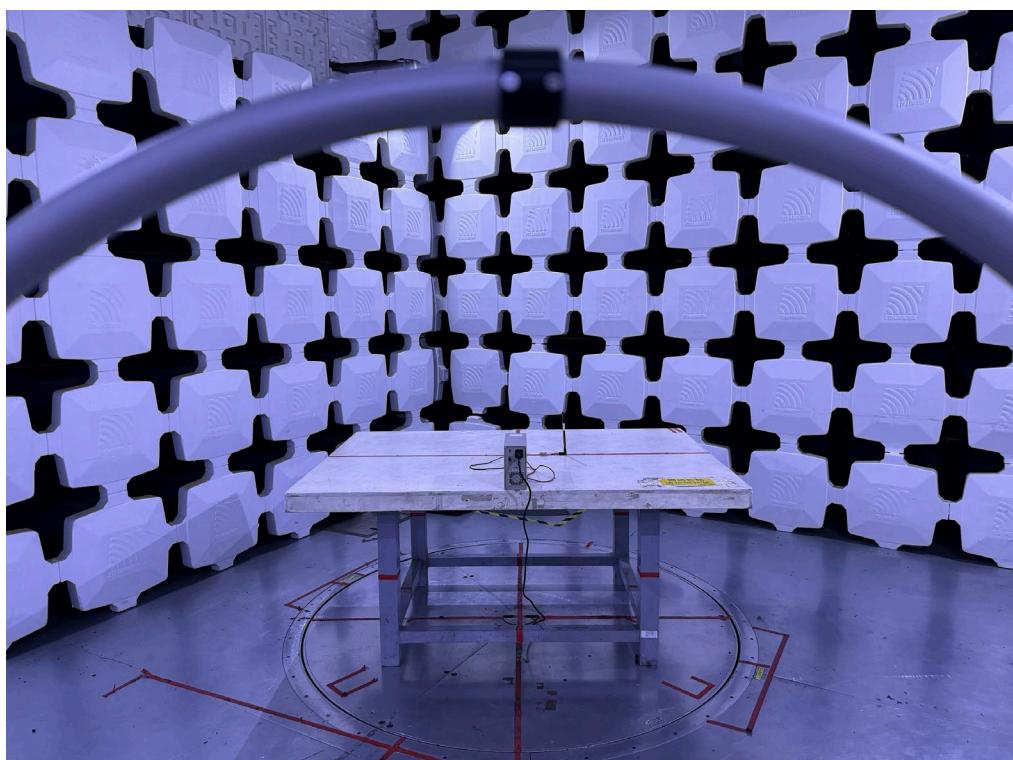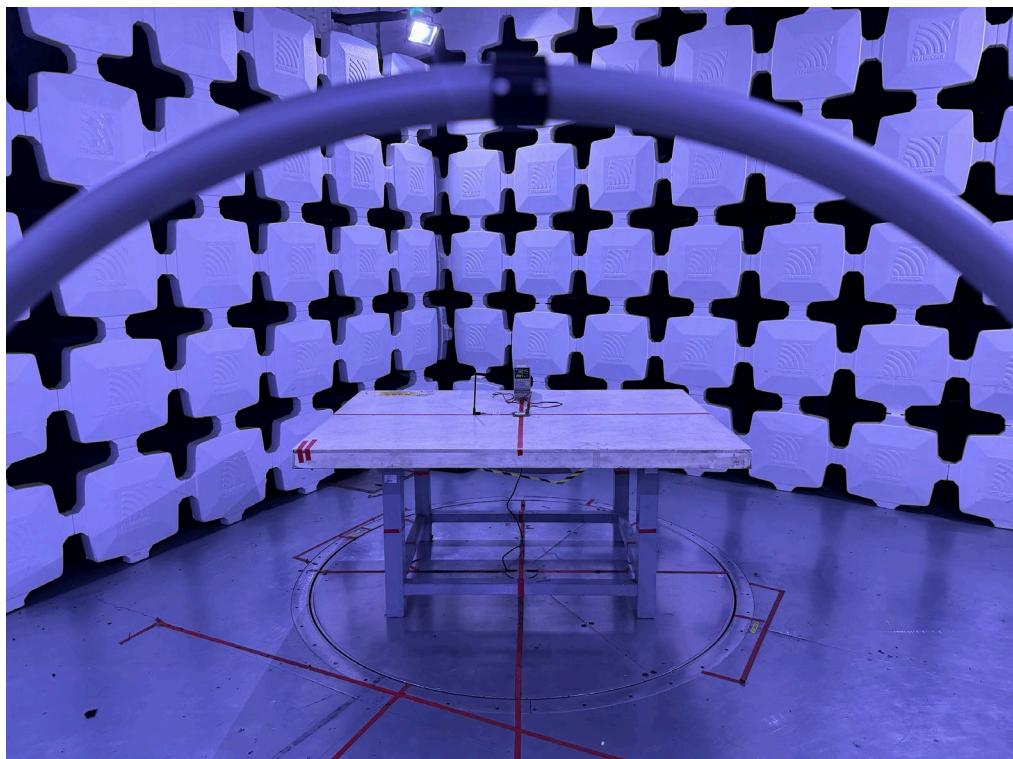Radiated Emissions Test Photos**9 kHz to 30 MHz**

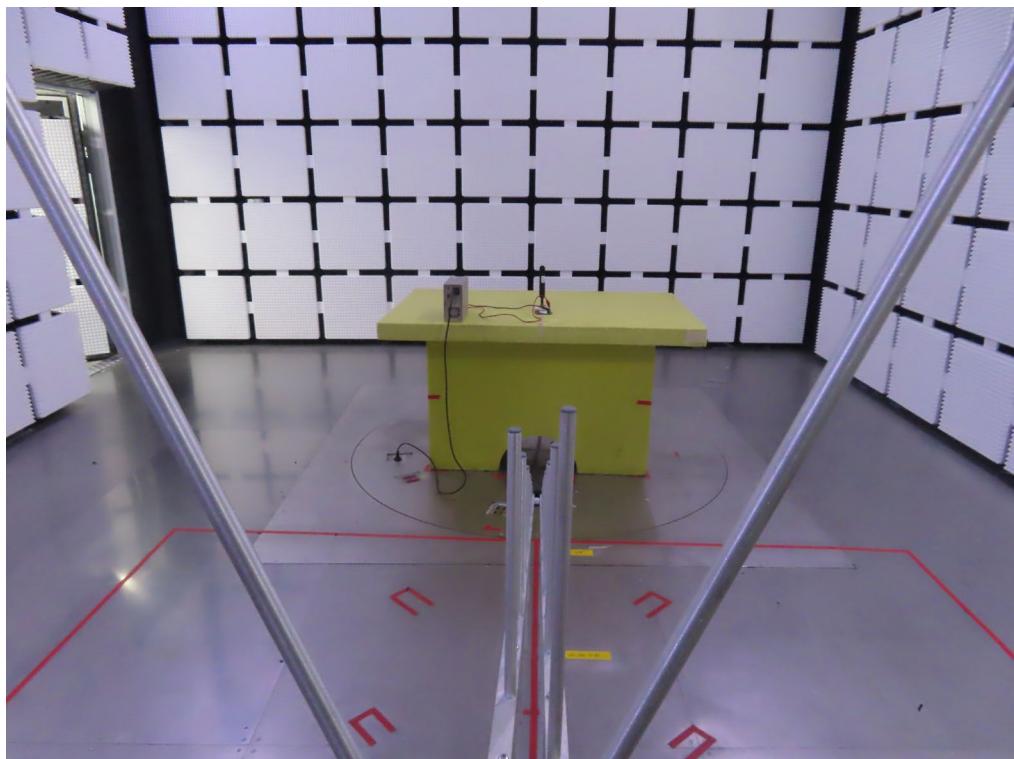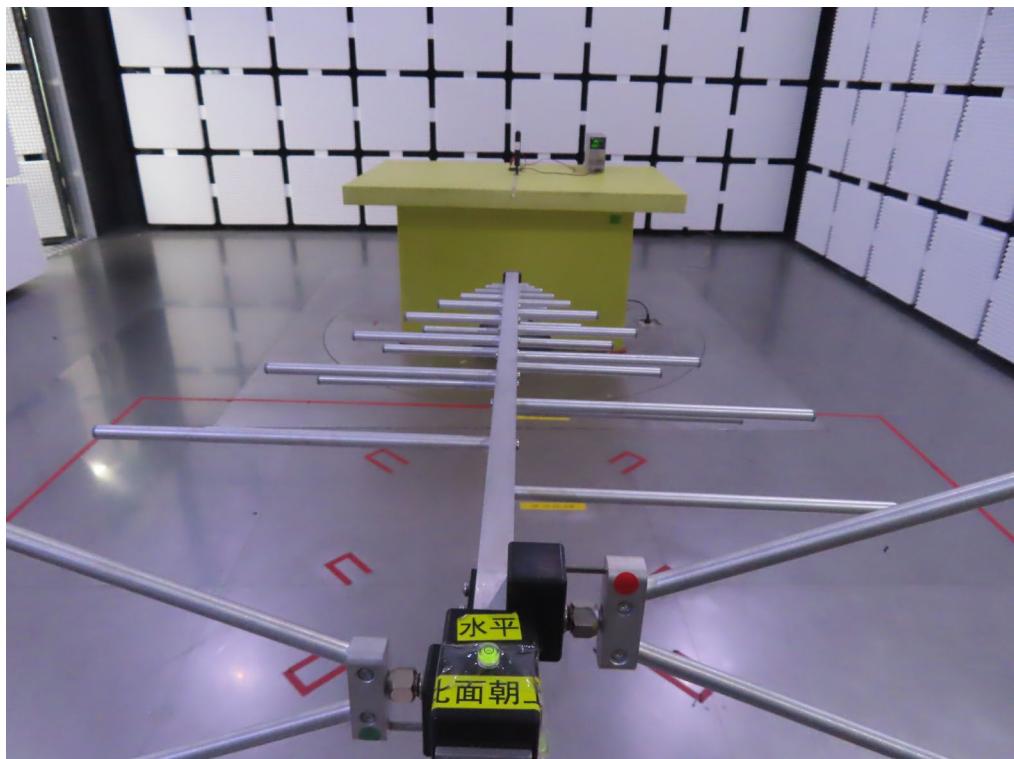Radiated Emissions Test Photos**30 MHz to 1000 MHz**

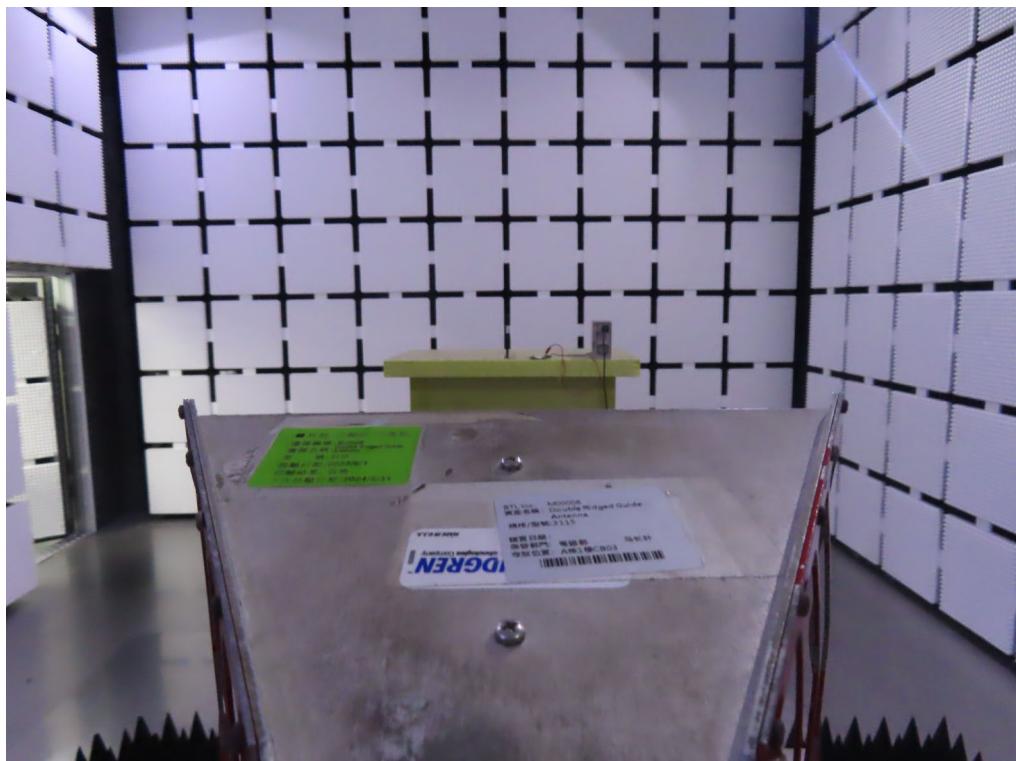
Radiated Emissions Test Photos**Band edge & Harmonic (1 GHz to 18 GHz)**

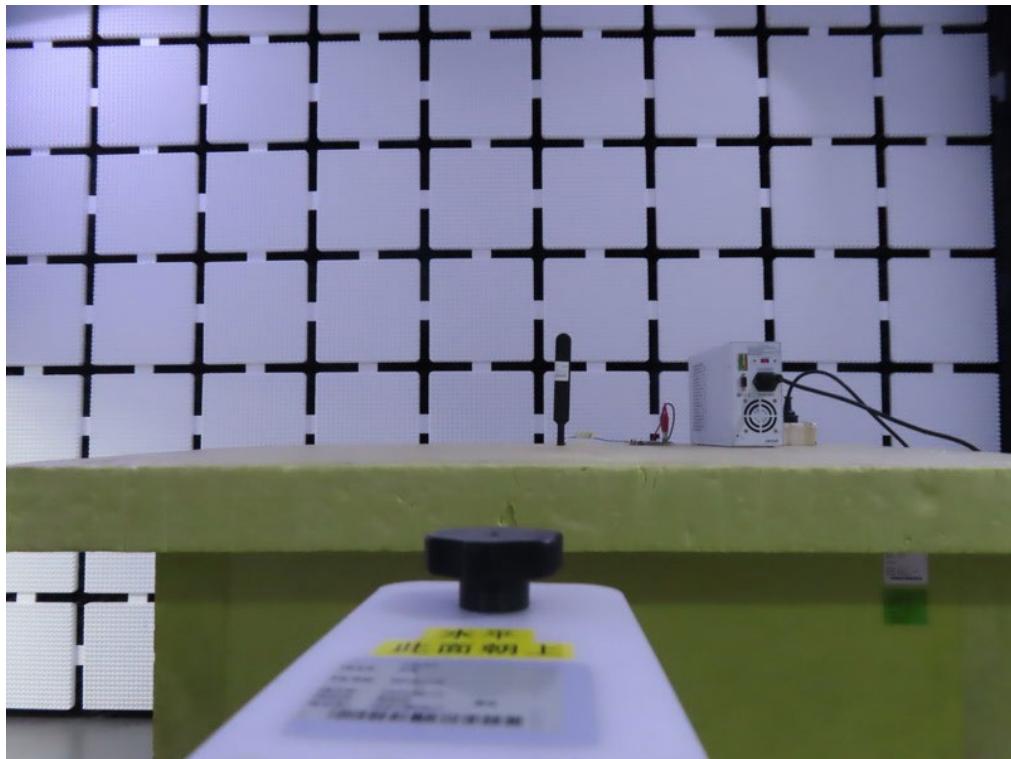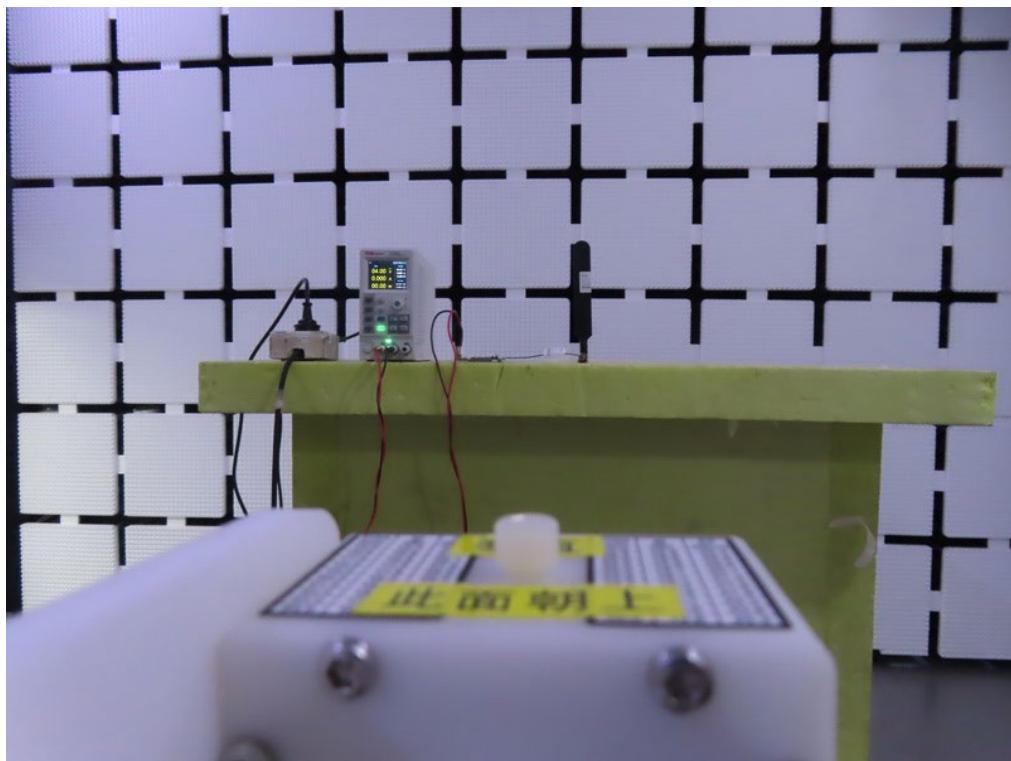Radiated Emissions Test Photos**Harmonic (18 GHz to 26.5 GHz)**

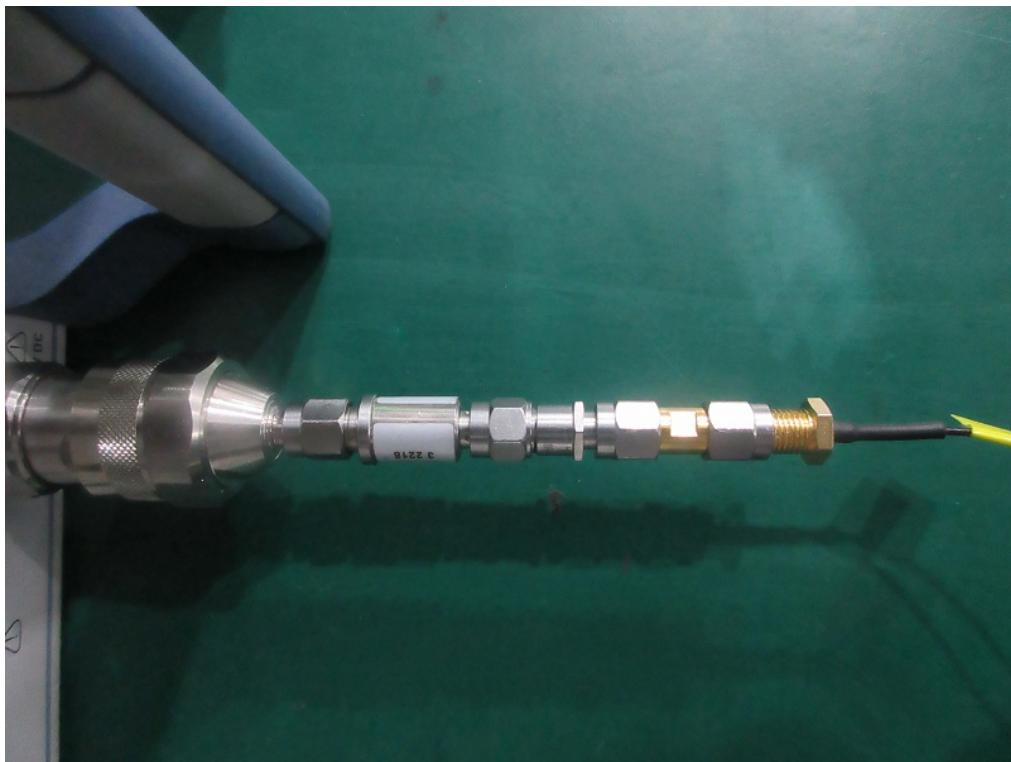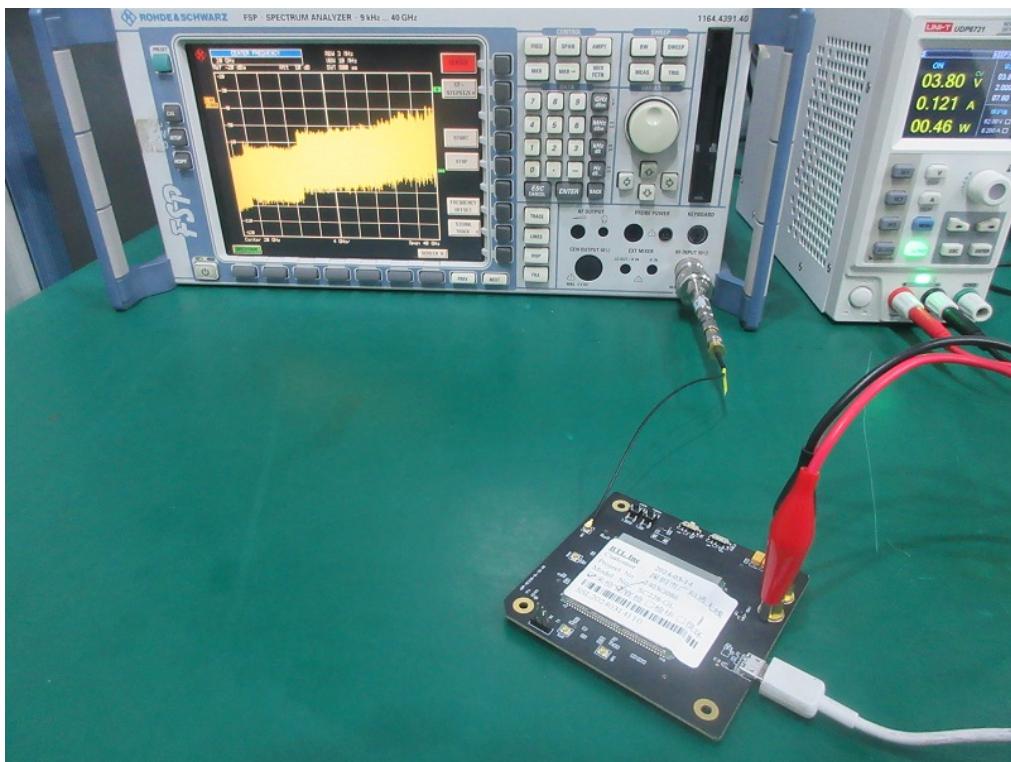Conducted Test Photos

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

| | | | |
|-----------|--------------------------|-------|------|
| Test Mode | TX Mode_2Mbps Channel 00 | Phase | Line |
|-----------|--------------------------|-------|------|

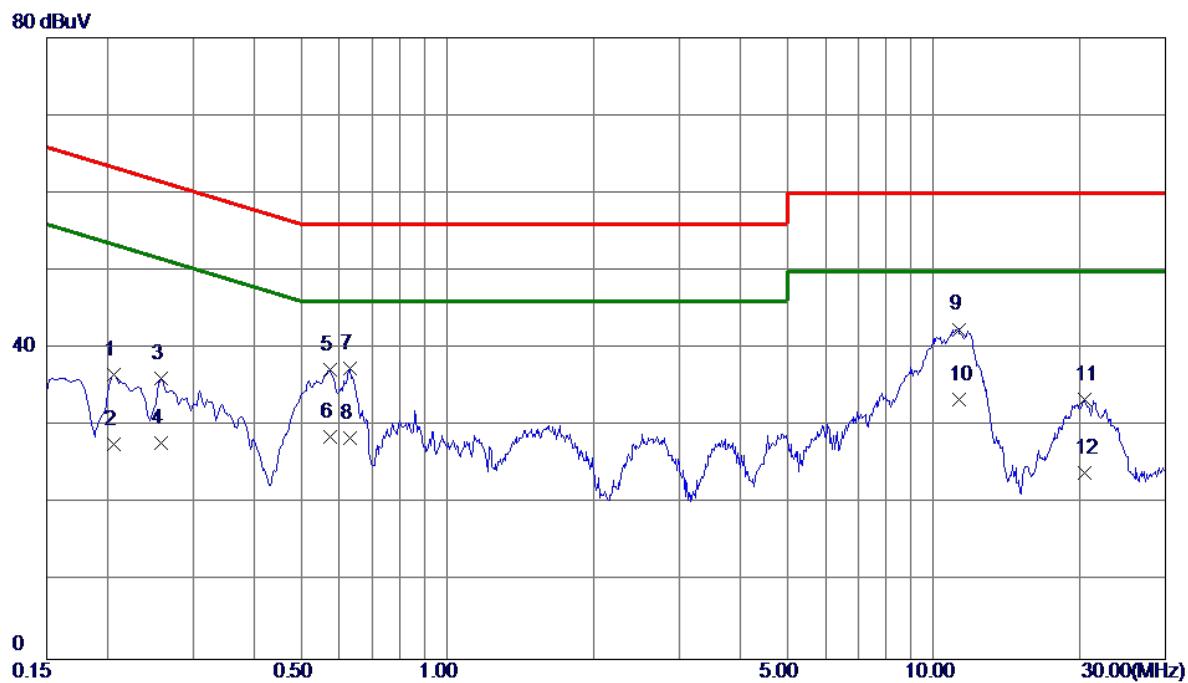


| No. | Freq. MHz | Reading Level dBuV | Correct Factor | Measure ment dBuV | Limit dBuV | Margin | | Comment |
|------|--------------|--------------------------|-------------------|-------------------------|---------------|----------|-----|---------|
| | | | | | | Detector | | |
| 1 | 0.2063 | 26.68 | 9.99 | 36.67 | 63.35 | -26.68 | QP | |
| 2 | 0.2063 | 17.70 | 9.99 | 27.69 | 53.35 | -25.66 | AVG | |
| 3 | 0.2580 | 26.07 | 10.08 | 36.15 | 61.50 | -25.35 | QP | |
| 4 | 0.2580 | 17.81 | 10.08 | 27.89 | 51.50 | -23.61 | AVG | |
| 5 | 0.5730 | 26.47 | 10.78 | 37.25 | 56.00 | -18.75 | QP | |
| 6 | 0.5730 | 17.90 | 10.78 | 28.68 | 46.00 | -17.32 | AVG | |
| 7 | 0.6315 | 26.60 | 10.88 | 37.48 | 56.00 | -18.52 | QP | |
| 8 | 0.6315 | 17.60 | 10.88 | 28.48 | 46.00 | -17.52 | AVG | |
| 9 | 11.2673 | 30.17 | 12.31 | 42.48 | 60.00 | -17.52 | QP | |
| 10 * | 11.2673 | 21.19 | 12.31 | 33.50 | 50.00 | -16.50 | AVG | |
| 11 | 20.4404 | 18.72 | 14.65 | 33.37 | 60.00 | -26.63 | QP | |
| 12 | 20.4404 | 9.39 | 14.65 | 24.04 | 50.00 | -25.96 | AVG | |

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|--------------------------|-------|---------|
| Test Mode | TX Mode_2Mbps Channel 00 | Phase | Neutral |
|-----------|--------------------------|-------|---------|

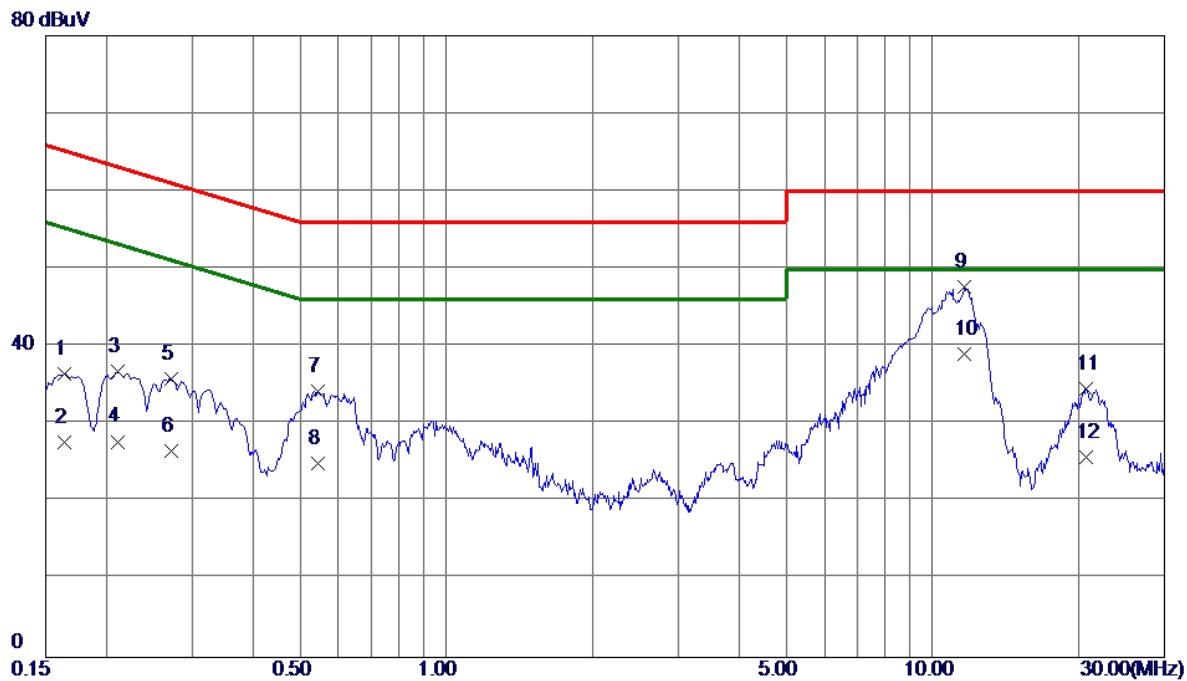


| No. | Freq. MHz | Reading Level dBuV | Correct Factor | Measure ment dBuV | Limit dBuV | Margin dB | Detector | |
|------|--------------|--------------------------|-------------------|-------------------------|---------------|--------------|----------|---------|
| | | | | | | | Detector | Comment |
| 1 | 0.1635 | 26.52 | 9.93 | 36.45 | 65.28 | -28.83 | QP | |
| 2 | 0.1635 | 17.70 | 9.93 | 27.63 | 55.28 | -27.65 | AVG | |
| 3 | 0.2108 | 26.81 | 9.96 | 36.77 | 63.17 | -26.40 | QP | |
| 4 | 0.2108 | 17.80 | 9.96 | 27.76 | 53.17 | -25.41 | AVG | |
| 5 | 0.2714 | 25.82 | 10.07 | 35.89 | 61.07 | -25.18 | QP | |
| 6 | 0.2714 | 16.50 | 10.07 | 26.57 | 51.07 | -24.50 | AVG | |
| 7 | 0.5460 | 23.54 | 10.68 | 34.22 | 56.00 | -21.78 | QP | |
| 8 | 0.5460 | 14.30 | 10.68 | 24.98 | 46.00 | -21.02 | AVG | |
| 9 | 11.6115 | 35.34 | 12.31 | 47.65 | 60.00 | -12.35 | QP | |
| 10 * | 11.6115 | 26.70 | 12.31 | 39.01 | 50.00 | -10.99 | AVG | |
| 11 | 20.7218 | 20.00 | 14.62 | 34.62 | 60.00 | -25.38 | QP | |
| 12 | 20.7218 | 11.10 | 14.62 | 25.72 | 50.00 | -24.28 | AVG | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode TX Mode _2Mbps Channel 00 Polarization Ant 0°

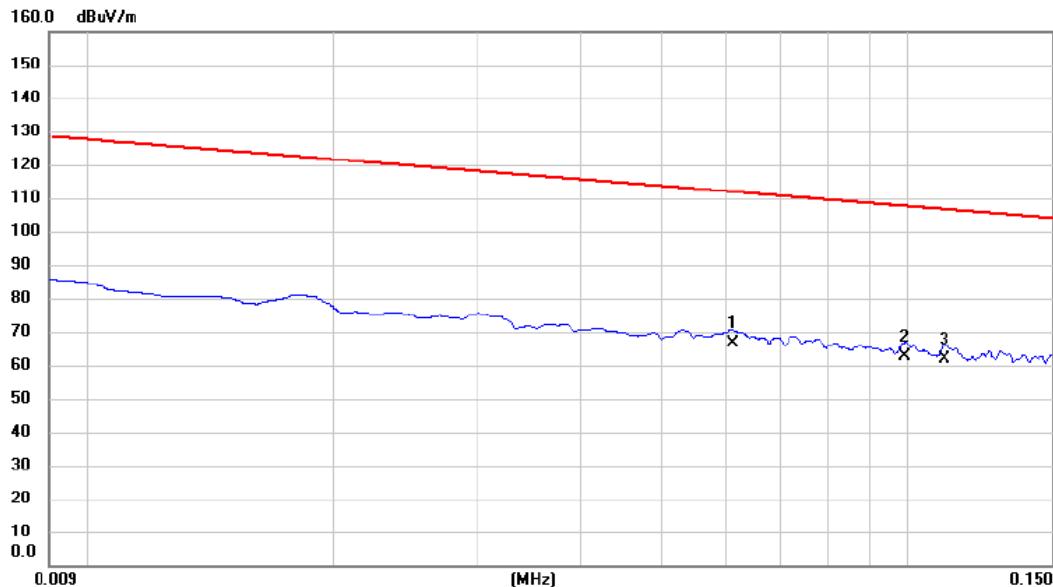


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure- ment | Limit | Margin | | | | | | | |
|-----|-----|--------|---------------|----------------|------------------|--------|--------|------|----|--------|--------|----|----------|---------|
| | | | | | | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 0.0612 | 45.25 | 21.24 | 66.49 | 111.87 | -45.38 | AVG | | | | | | |
| 2 | * | 0.0991 | 41.47 | 21.33 | 62.80 | 107.68 | -44.88 | QP | | | | | | |
| 3 | | 0.1111 | 40.36 | 21.31 | 61.67 | 106.69 | -45.02 | AVG | | | | | | |

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|--------------------------|--------------|--------|
| Test Mode | TX Mode_2Mbps Channel 00 | Polarization | Ant 0° |
|-----------|--------------------------|--------------|--------|

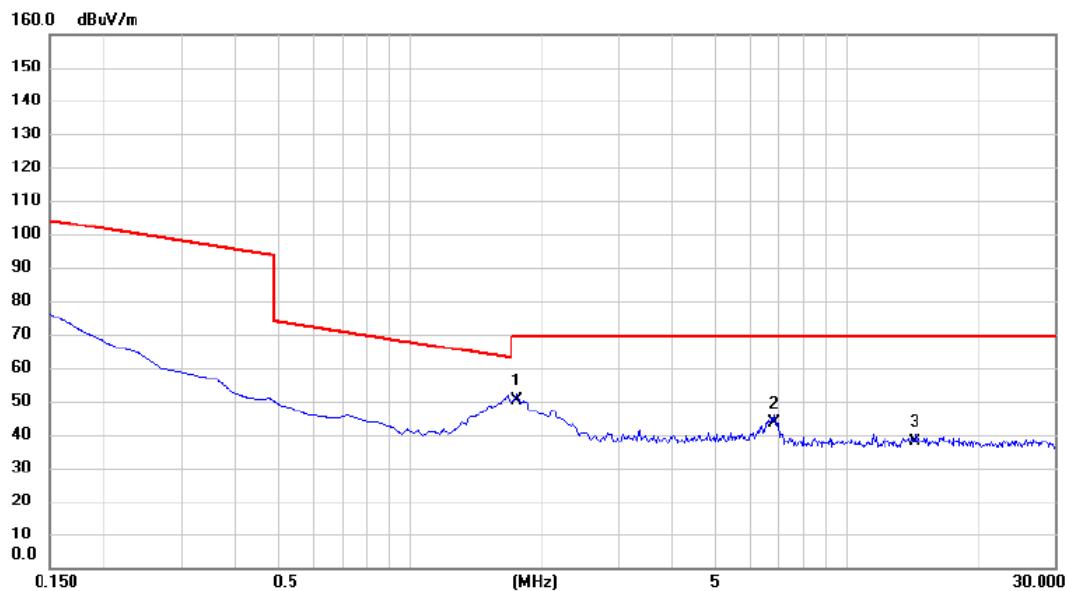


| No. | Mk. | Freq. | Reading | Correct | Measure- | Limit | Margin | Detector | Comment |
|-----|-----|---------|------------------|---------|--------------------|--------------------|--------|----------|---------|
| | | | Level | Factor | ment | | | | |
| | | MHz | dB _{uV} | dB | dB _{uV/m} | dB _{uV/m} | dB | | |
| 1 | * | 1.7620 | 28.92 | 21.11 | 50.03 | 69.54 | -19.51 | QP | |
| 2 | | 6.8364 | 22.31 | 21.17 | 43.48 | 69.54 | -26.06 | QP | |
| 3 | | 14.3885 | 16.42 | 21.25 | 37.67 | 69.54 | -31.87 | QP | |

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|--------------------------|--------------|---------|
| Test Mode | TX Mode_2Mbps Channel 00 | Polarization | Ant 90° |
|-----------|--------------------------|--------------|---------|

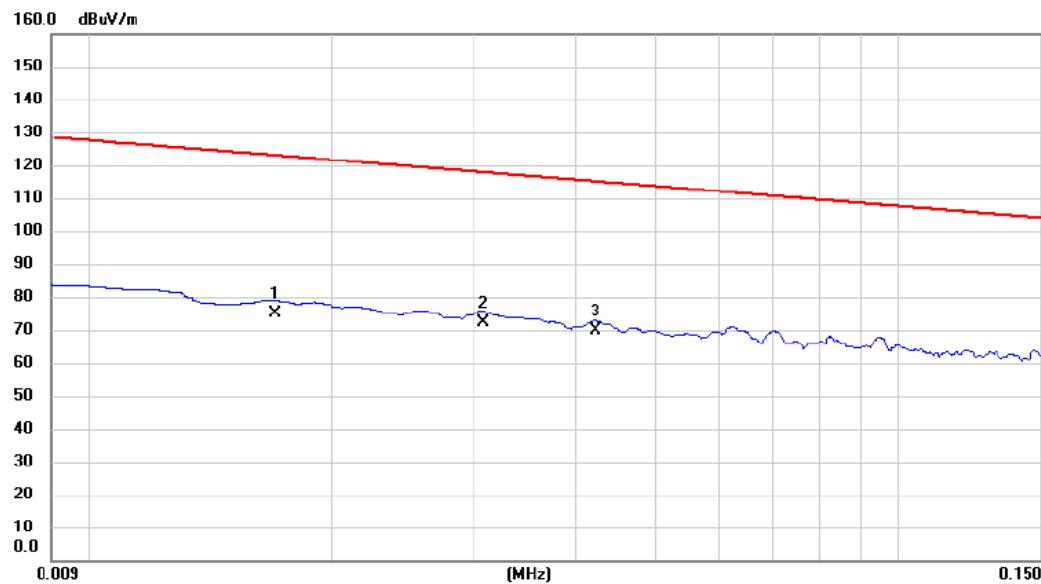


| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure- ment | Limit | Margin | | |
|-----|-----|--------|---------------|----------------|------------------|--------|--------|----------|---------|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector | Comment |
| 1 | | 0.0170 | 54.36 | 20.71 | 75.07 | 123.00 | -47.93 | AVG | |
| 2 | | 0.0307 | 50.91 | 21.10 | 72.01 | 117.86 | -45.85 | AVG | |
| 3 | * | 0.0423 | 48.60 | 21.16 | 69.76 | 115.08 | -45.32 | AVG | |

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|--------------------------|--------------|---------|
| Test Mode | TX Mode_2Mbps Channel 00 | Polarization | Ant 90° |
|-----------|--------------------------|--------------|---------|

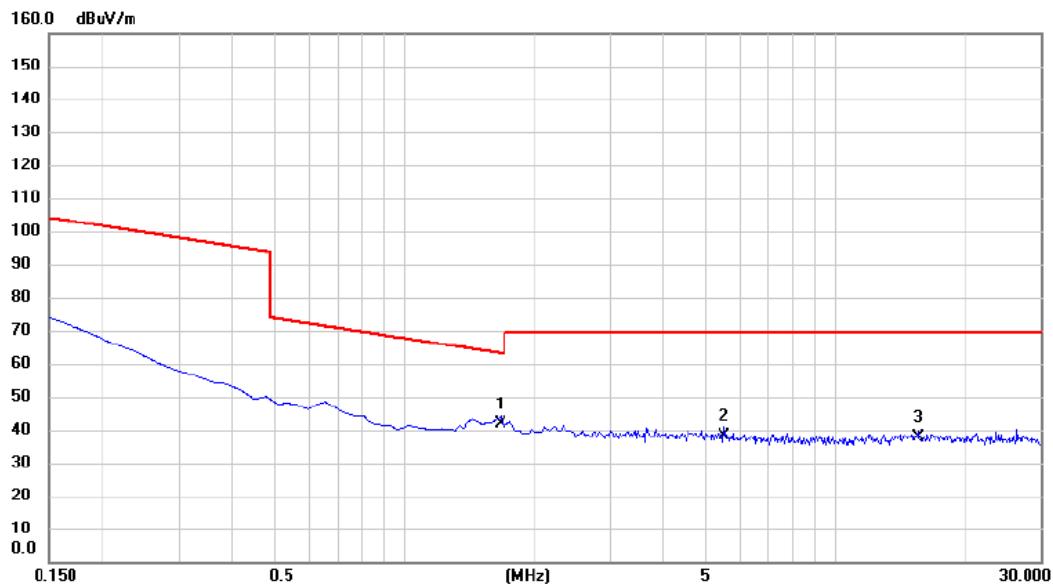


| No. | Mk. | Freq. | Reading | Correct | Measure- | Limit | Margin | Detector | Comment |
|-----|-----|---------|---------|---------|----------|--------|--------|----------|---------|
| | | | Level | Factor | ment | | | | |
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | | |
| 1 | * | 1.6724 | 20.64 | 21.11 | 41.75 | 63.14 | -21.39 | QP | |
| 2 | | 5.5230 | 17.24 | 21.16 | 38.40 | 69.54 | -31.14 | QP | |
| 3 | | 15.5526 | 16.35 | 21.27 | 37.62 | 69.54 | -31.92 | QP | |

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

| | | | |
|-----------|--------------------------|--------------|----------|
| Test Mode | TX Mode_2Mbps Channel 00 | Polarization | Vertical |
|-----------|--------------------------|--------------|----------|

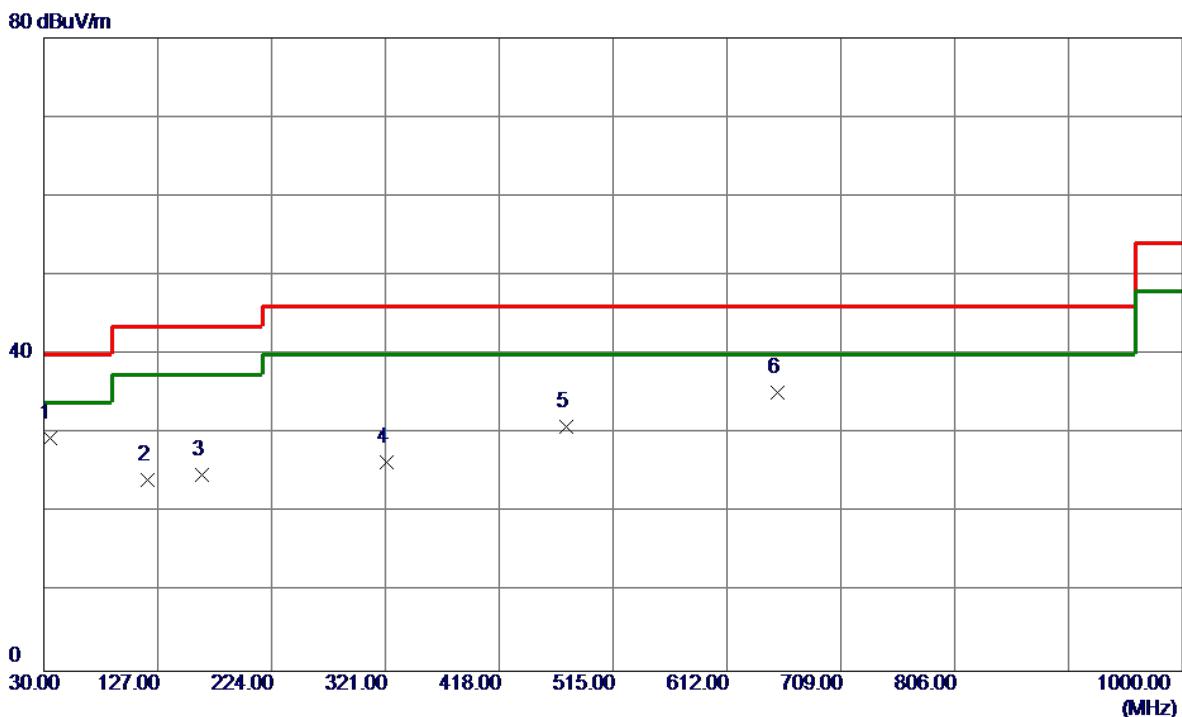


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit | Margin | Detector | Comment | |
|-----|----------|---------------|----------------|-------------|-------|--------|----------|---------|----|
| | | | | | MHz | dBuV/m | dB | dBuV/m | dB |
| 1 * | 34.8500 | 41.71 | -12.33 | 29.38 | 40.00 | -10.62 | Peak | | |
| 2 | 118.7550 | 37.49 | -13.30 | 24.19 | 43.50 | -19.31 | Peak | | |
| 3 | 164.8300 | 35.83 | -11.03 | 24.80 | 43.50 | -18.70 | Peak | | |
| 4 | 322.4549 | 36.30 | -9.86 | 26.44 | 46.00 | -19.56 | Peak | | |
| 5 | 475.2300 | 37.19 | -6.31 | 30.88 | 46.00 | -15.12 | Peak | | |
| 6 | 655.1650 | 38.01 | -2.78 | 35.23 | 46.00 | -10.77 | Peak | | |

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|--------------------------|--------------|------------|
| Test Mode | TX Mode_2Mbps Channel 00 | Polarization | Horizontal |
|-----------|--------------------------|--------------|------------|

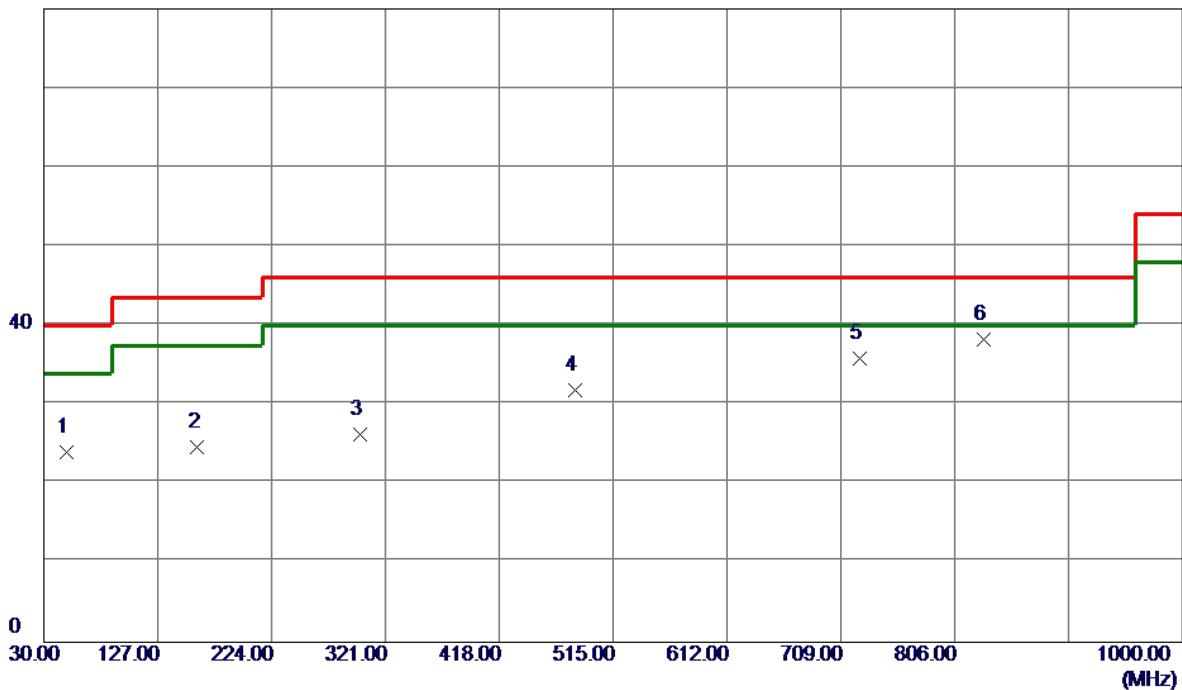80 dBuV/m


| No. | Freq. | Reading Level | Correct Factor | Measure ment | Limit | Margin | | |
|-----|-----------|---------------|----------------|--------------|--------|---------|------|--------|
| | | | | | | | MHz | dBuV/m |
| 1 | 49. 8849 | 35. 26 | -11. 32 | 23. 94 | 40. 00 | -16. 06 | Peak | |
| 2 | 160. 9500 | 35. 55 | -10. 87 | 24. 68 | 43. 50 | -18. 82 | Peak | |
| 3 | 299. 1750 | 36. 80 | -10. 56 | 26. 24 | 46. 00 | -19. 76 | Peak | |
| 4 | 482. 9900 | 38. 08 | -6. 19 | 31. 89 | 46. 00 | -14. 11 | Peak | |
| 5 | 725. 4900 | 37. 56 | -1. 71 | 35. 85 | 46. 00 | -10. 15 | Peak | |
| 6 * | 831. 2199 | 39. 05 | -0. 80 | 38. 25 | 46. 00 | -7. 75 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ

| | | | |
|-----------|-------------------------|--------------|----------|
| Test Mode | TX 2402 MHz _CH00_1Mbps | Polarization | Vertical |
|-----------|-------------------------|--------------|----------|

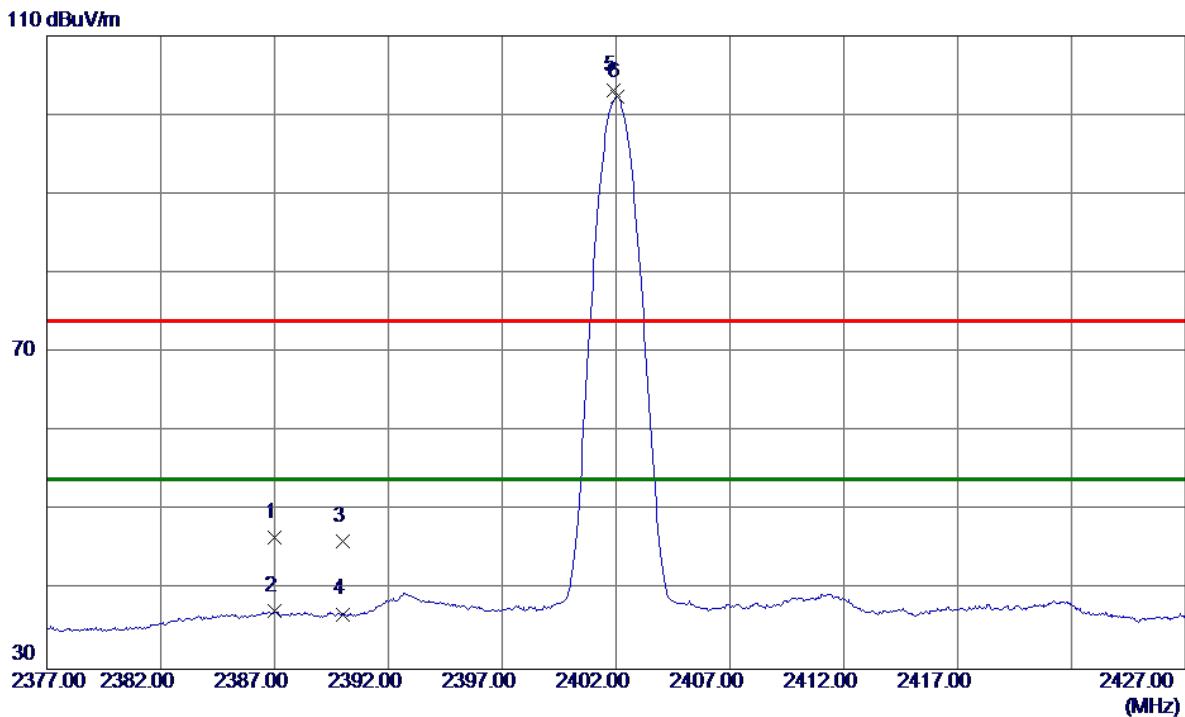


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit | Margin | Detector | Comment |
|-----|-----------|---------------|----------------|-------------|--------|--------|----------|----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 2387.0000 | 41.11 | 5.51 | 46.62 | 74.00 | -27.38 | Peak | |
| 2 | 2387.0000 | 31.80 | 5.51 | 37.31 | 54.00 | -16.69 | AVG | |
| 3 | 2390.0000 | 40.72 | 5.51 | 46.23 | 74.00 | -27.77 | Peak | |
| 4 | 2390.0000 | 31.45 | 5.51 | 36.96 | 54.00 | -17.04 | AVG | |
| 5 | 2401.8750 | 97.63 | 5.51 | 103.14 | 74.00 | 29.14 | Peak | No Limit |
| 6 * | 2402.0500 | 96.77 | 5.51 | 102.28 | 54.00 | 48.28 | AVG | No Limit |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-------------------------|--------------|----------|
| Test Mode | TX 2402 MHz _CH00_1Mbps | Polarization | Vertical |
|-----------|-------------------------|--------------|----------|

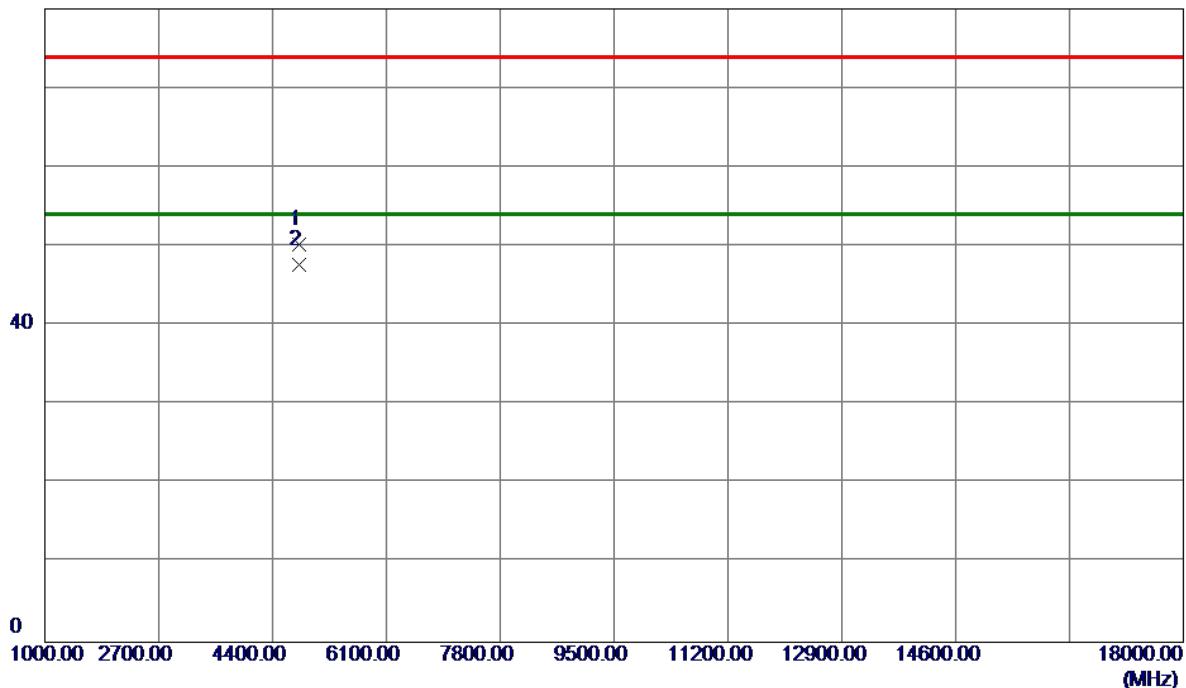
80 dBuV/m

| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dB | Margin Detector | Comment | |
|-----|--------------|----------------------------|-------------------------|---------------------------|-------------|--------------------|----------|---------|
| | | | | | | | Detector | Comment |
| 1 | 4803.6800 | 49.77 | 0.40 | 50.17 | 74.00 | -23.83 | Peak | |
| 2 * | 4804.0299 | 47.23 | 0.40 | 47.63 | 54.00 | -6.37 | AVG | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-------------------------|--------------|----------|
| Test Mode | TX 2441 MHz _CH39_1Mbps | Polarization | Vertical |
|-----------|-------------------------|--------------|----------|

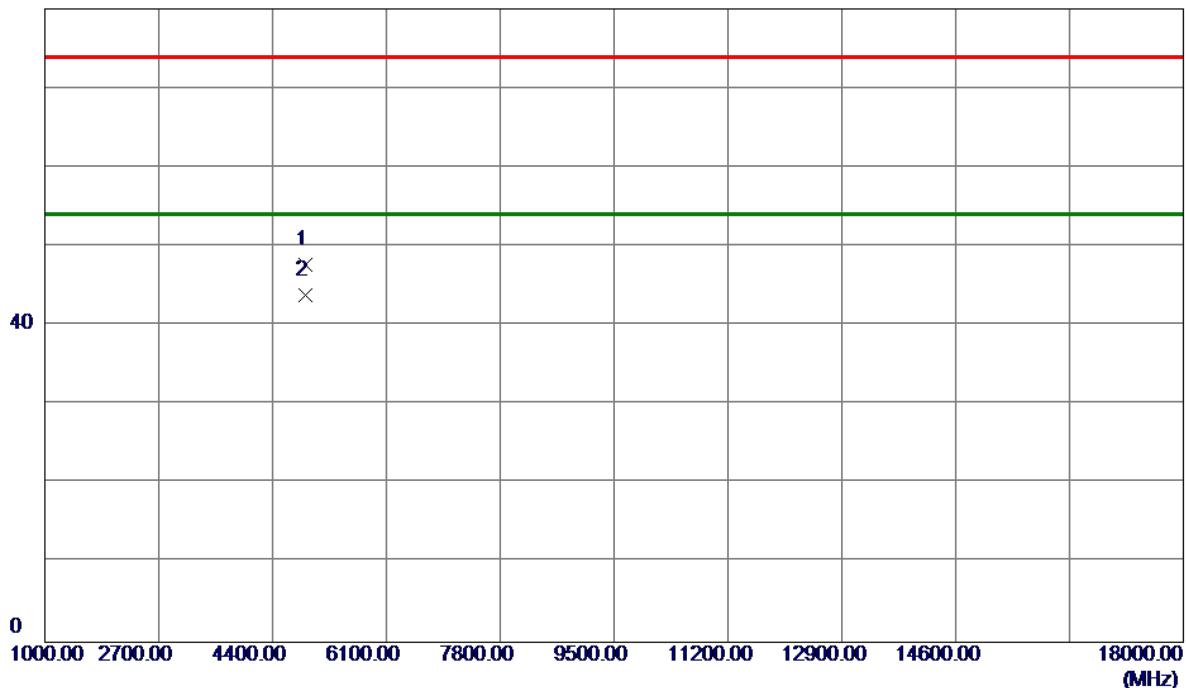80 dBuV/m


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit | Margin | |
|-----|-----------|---------------|----------------|-------------|--------|--------|----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | Detector |
| 1 | 4881.7700 | 47.01 | 0.62 | 47.63 | 74.00 | -26.37 | Peak |
| 2 * | 4882.0250 | 43.23 | 0.62 | 43.85 | 54.00 | -10.15 | AVG |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-------------------------|--------------|----------|
| Test Mode | TX 2480 MHz _CH78_1Mbps | Polarization | Vertical |
|-----------|-------------------------|--------------|----------|

110 dBuV/m

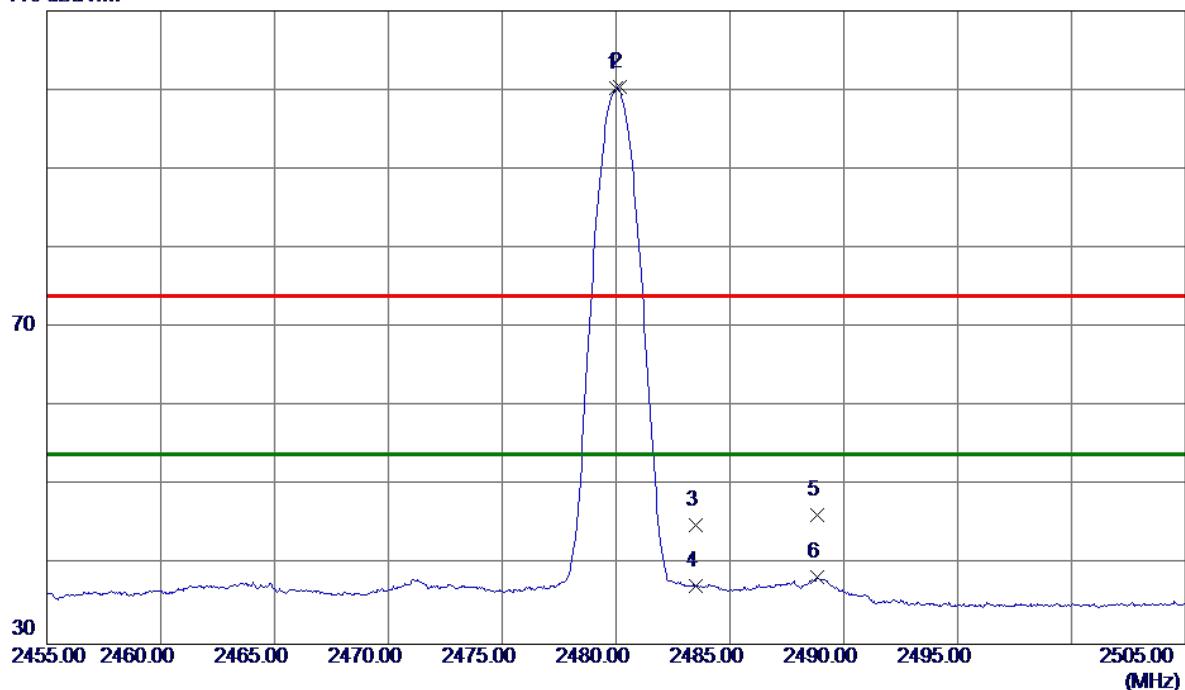


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit | Margin | | |
|-----|-----------|---------------|----------------|-------------|-------|--------|----------|----------|
| | MHz | dBuV/m | dB | dBuV/m | dB | | Detector | Comment |
| 1 * | 2480.0250 | 94.74 | 5.49 | 100.23 | 54.00 | 46.23 | AVG | No Limit |
| 2 | 2480.1500 | 94.85 | 5.49 | 100.34 | 74.00 | 26.34 | Peak | No Limit |
| 3 | 2483.5000 | 39.52 | 5.48 | 45.00 | 74.00 | -29.00 | Peak | |
| 4 | 2483.5000 | 31.82 | 5.48 | 37.30 | 54.00 | -16.70 | AVG | |
| 5 | 2488.8250 | 40.77 | 5.48 | 46.25 | 74.00 | -27.75 | Peak | |
| 6 | 2488.8250 | 32.94 | 5.48 | 38.42 | 54.00 | -15.58 | AVG | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-------------------------|--------------|----------|
| Test Mode | TX 2480 MHz _CH78_1Mbps | Polarization | Vertical |
|-----------|-------------------------|--------------|----------|

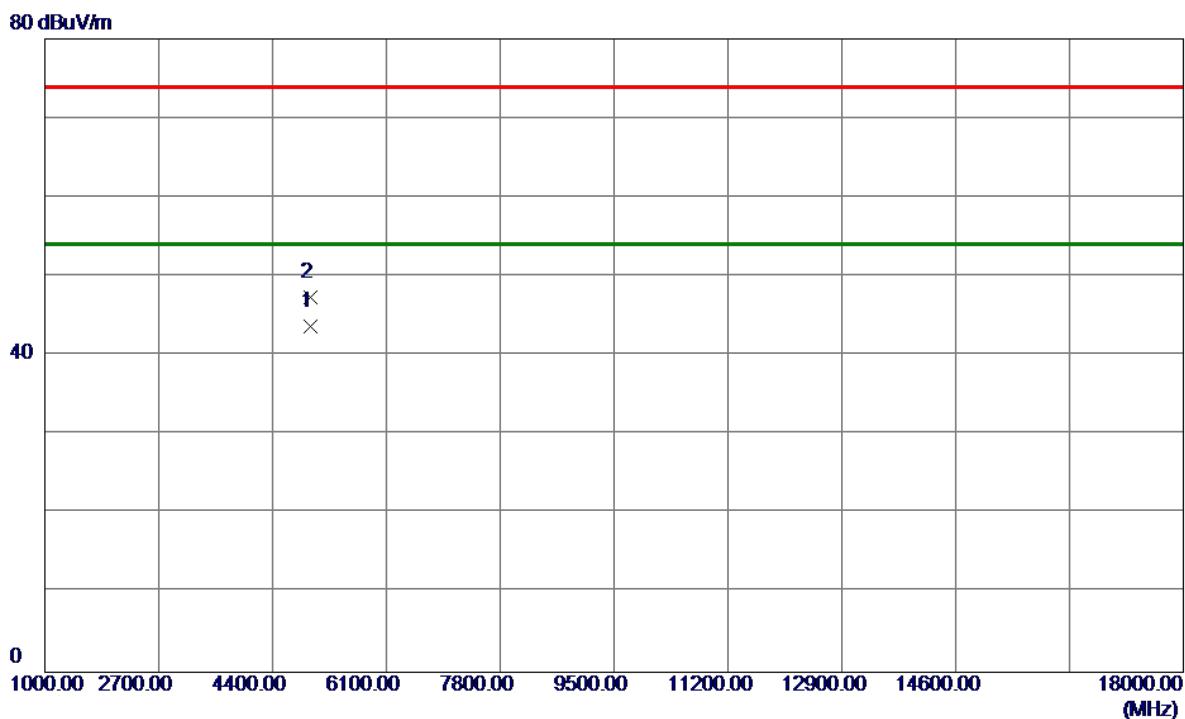


| No. | Freq. MHz | Reading Level dBuV/m | Correct Factor dB | Measure ment dBuV/m | Limit dBuV/m | Margin dB | Detector | |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| | | | | | | | Detector | Comment |
| 1 * | 4960.0350 | 42.78 | 0.83 | 43.61 | 54.00 | -10.39 | AVG | |
| 2 | 4960.2450 | 46.50 | 0.83 | 47.33 | 74.00 | -26.67 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-------------------------|--------------|----------|
| Test Mode | TX 2402 MHz _CH00_3Mbps | Polarization | Vertical |
|-----------|-------------------------|--------------|----------|

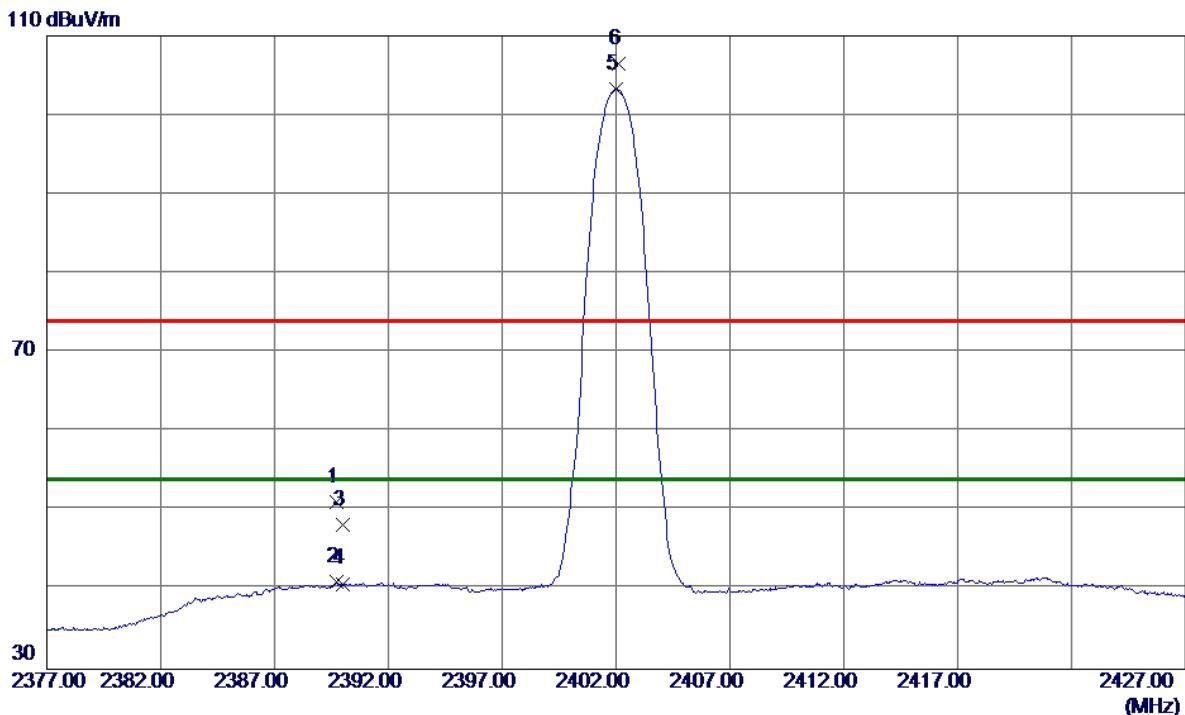


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit | Margin | Detector | Comment |
|-----|-----------|---------------|----------------|-------------|--------|--------|----------|----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV/m | dB | | |
| 1 | 2389.7000 | 45.68 | 5.51 | 51.19 | 74.00 | -22.81 | Peak | |
| 2 | 2389.7000 | 35.47 | 5.51 | 40.98 | 54.00 | -13.02 | AVG | |
| 3 | 2390.0000 | 42.78 | 5.51 | 48.29 | 74.00 | -25.71 | Peak | |
| 4 | 2390.0000 | 35.29 | 5.51 | 40.80 | 54.00 | -13.20 | AVG | |
| 5 * | 2402.0000 | 97.75 | 5.51 | 103.26 | 54.00 | 49.26 | AVG | No Limit |
| 6 | 2402.1000 | 101.00 | 5.51 | 106.51 | 74.00 | 32.51 | Peak | No Limit |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-------------------------|--------------|----------|
| Test Mode | TX 2402 MHz _CH00_3Mbps | Polarization | Vertical |
|-----------|-------------------------|--------------|----------|

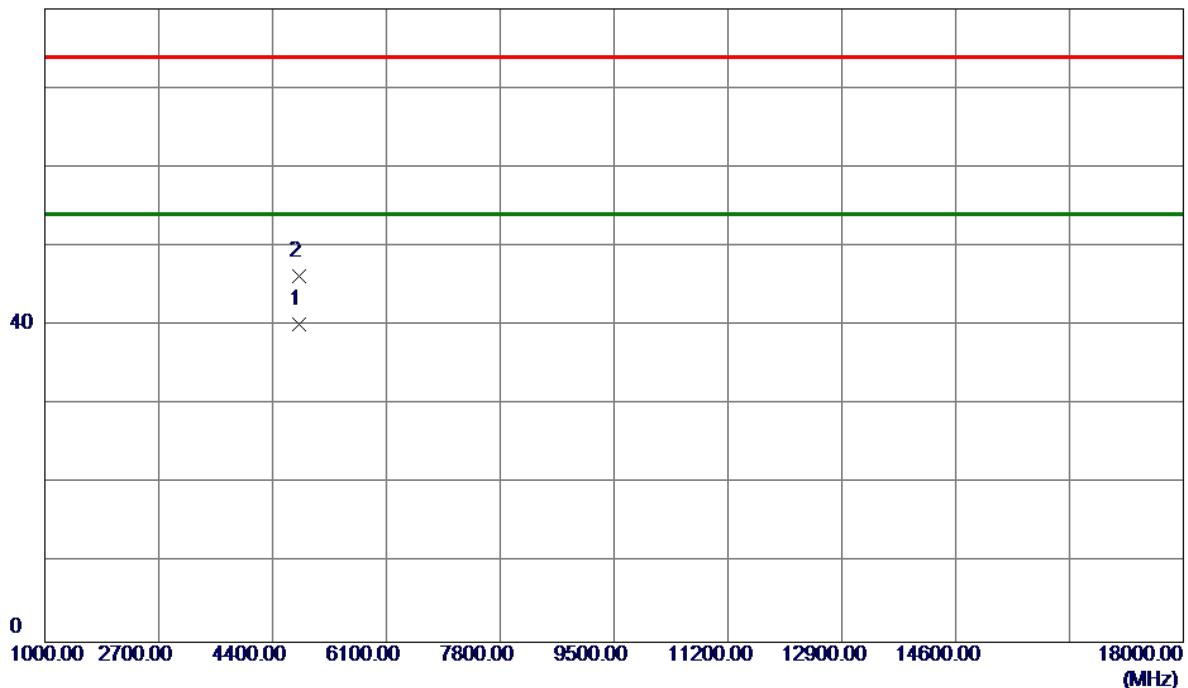
80 dBuV/m

| No. | Freq. | Reading | Correct | Measure | Limit | Margin | Detector | Comment |
|-----|-----------|---------|---------|---------|-------|--------|----------|---------|
| | | Level | Factor | ment | | | | |
| | MHz | dBuV/m | dB | dBuV/m | dB | | | |
| 1 * | 4804.0350 | 39.69 | 0.40 | 40.09 | 54.00 | -13.91 | AVG | |
| 2 | 4804.3350 | 45.84 | 0.41 | 46.25 | 74.00 | -27.75 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-------------------------|--------------|----------|
| Test Mode | TX 2441 MHz _CH39_3Mbps | Polarization | Vertical |
|-----------|-------------------------|--------------|----------|

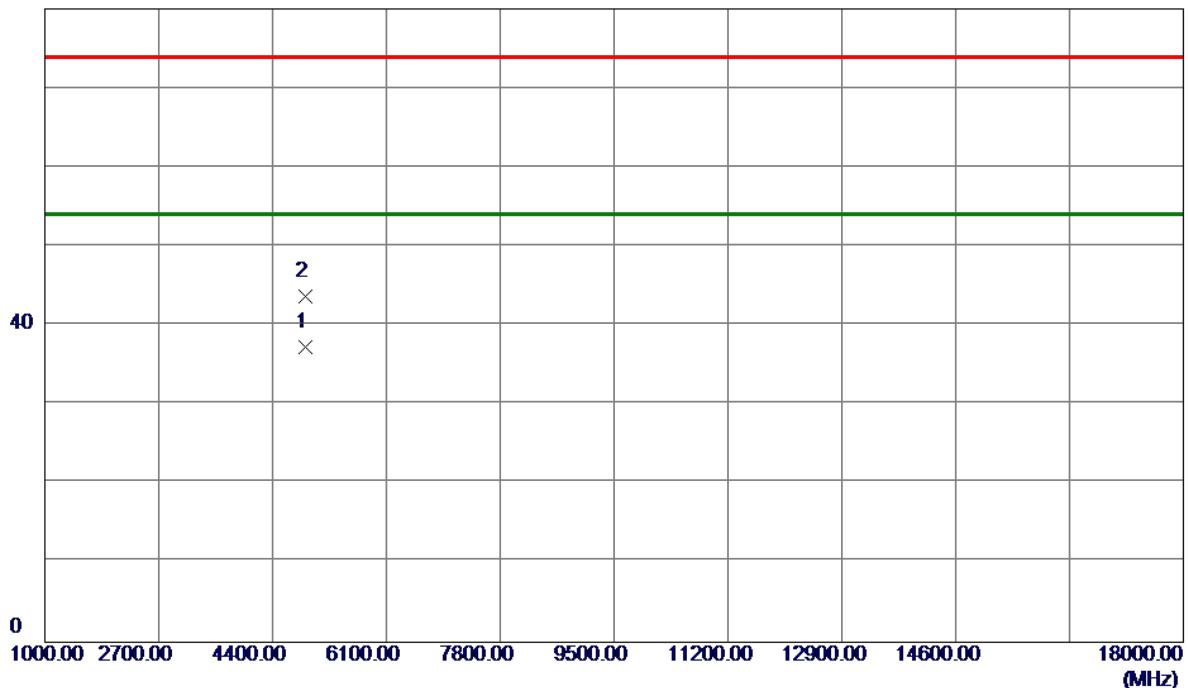
80 dBuV/m

| No. | Freq. | Reading | Correct | Measure | Limit | Margin | Detector | Comment |
|-----|-----------|---------|---------|---------|-------|--------|----------|---------|
| | | Level | Factor | ment | | | | |
| | MHz | dBuV/m | dB | dBuV/m | dB | | | |
| 1 * | 4882.0900 | 36.70 | 0.62 | 37.32 | 54.00 | -16.68 | AVG | |
| 2 | 4882.3450 | 43.03 | 0.62 | 43.65 | 74.00 | -30.35 | Peak | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-------------------------|--------------|----------|
| Test Mode | TX 2480 MHz _CH78_3Mbps | Polarization | Vertical |
|-----------|-------------------------|--------------|----------|

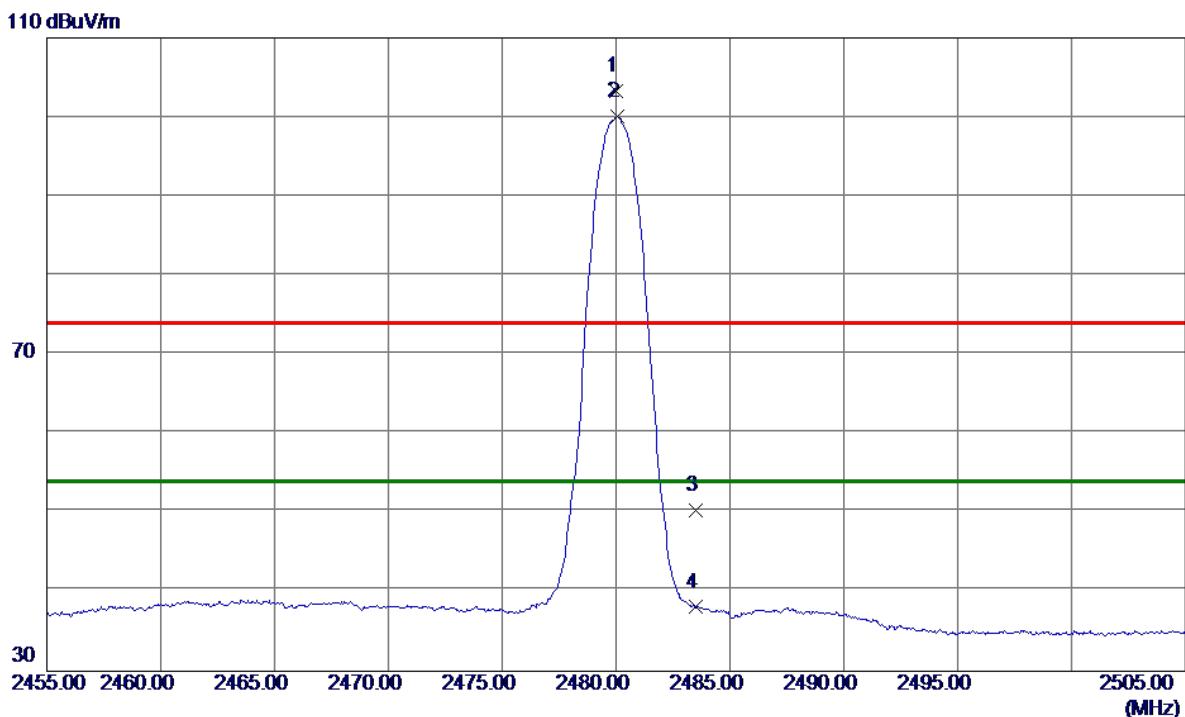


| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit | Margin | Detector | Comment |
|-----|-----------|---------------|----------------|-------------|-------|--------|----------|----------|
| | MHz | dBuV/m | dB | dBuV/m | dB | | | |
| 1 | 2480.0000 | 97.78 | 5.49 | 103.27 | 74.00 | 29.27 | Peak | No Limit |
| 2 * | 2480.0500 | 94.52 | 5.49 | 100.01 | 54.00 | 46.01 | AVG | No Limit |
| 3 | 2483.5000 | 44.80 | 5.48 | 50.28 | 74.00 | -23.72 | Peak | |
| 4 | 2483.5000 | 32.60 | 5.48 | 38.08 | 54.00 | -15.92 | AVG | |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|-------------------------|--------------|----------|
| Test Mode | TX 2480 MHz _CH78_3Mbps | Polarization | Vertical |
|-----------|-------------------------|--------------|----------|

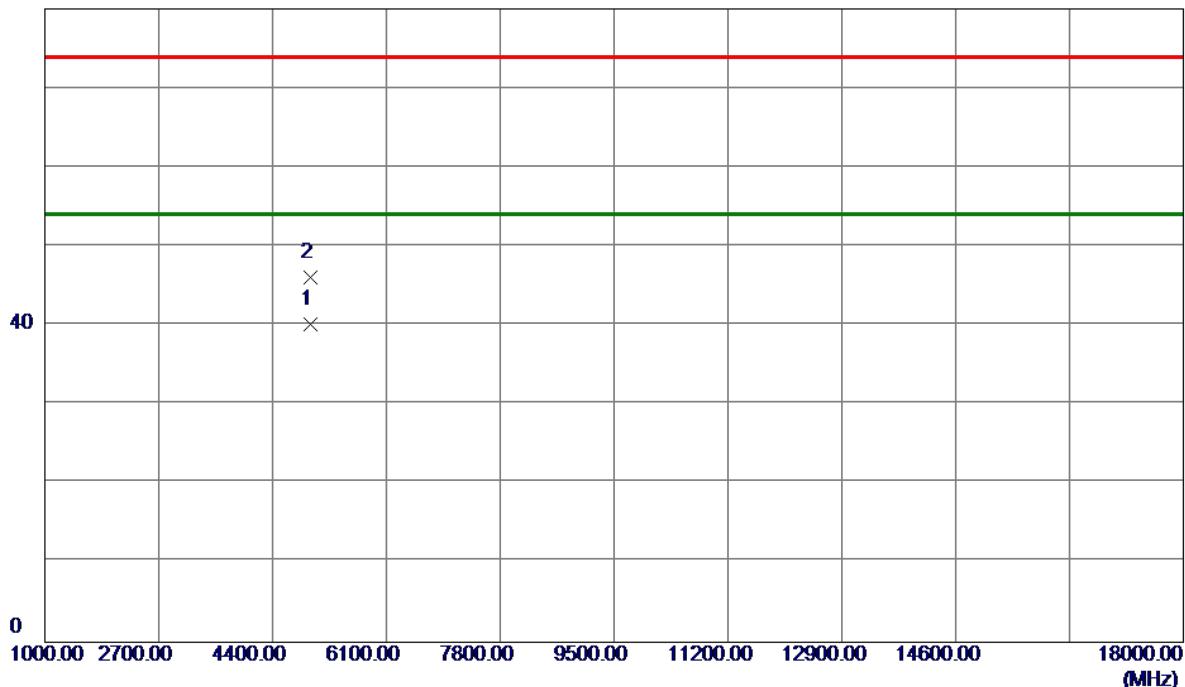
80 dBuV/m

| No. | Freq. | Reading Level | Correct Factor | Measurement | Limit | Margin | | |
|-----|-----------|---------------|----------------|-------------|-------|--------|------|--------|
| | | | | | | | MHz | dBuV/m |
| 1 * | 4960.0099 | 39.26 | 0.83 | 40.09 | 54.00 | -13.91 | AVG | dB |
| 2 | 4960.2950 | 45.29 | 0.83 | 46.12 | 74.00 | -27.88 | Peak | dB |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|--------------------------|--------------|----------|
| Test Mode | TX Mode_2Mbps Channel 00 | Polarization | Vertical |
|-----------|--------------------------|--------------|----------|

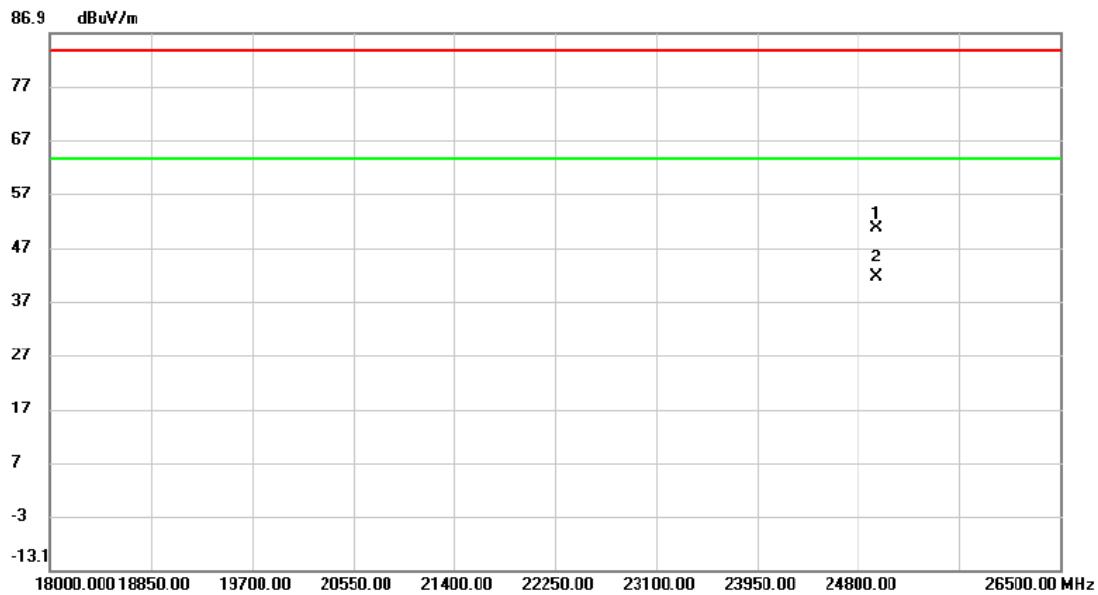


| No. | Mk. | Freq. | Reading | Correct | Measure- | Limit | Margin |
|-----|-----|----------|------------------|---------|--------------------|--------------------|------------------|
| | | | Level | Factor | ment | | |
| | | MHz | dB _{uV} | dB | dB _{uV/m} | dB _{uV/m} | Detector Comment |
| 1 | | 24953.00 | 41.70 | 8.78 | 50.48 | 83.50 | -33.02 peak |
| 2 | * | 24953.00 | 32.64 | 8.78 | 41.42 | 63.50 | -22.08 AVG |

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

| | | | |
|-----------|--------------------------|--------------|------------|
| Test Mode | TX Mode_2Mbps Channel 00 | Polarization | Horizontal |
|-----------|--------------------------|--------------|------------|

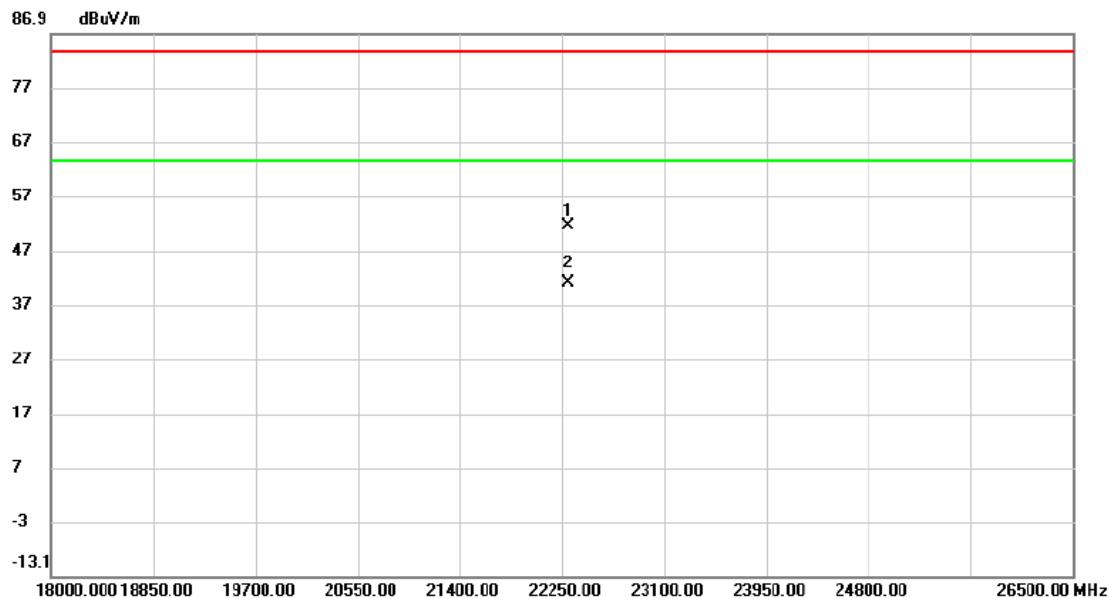

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measure- ment | Limit | Margin | |
|-----|-----|----------|---------------|----------------|------------------|--------|--------|------------------|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector Comment |
| 1 | | 22296.75 | 43.45 | 8.01 | 51.46 | 83.50 | -32.04 | peak |
| 2 | * | 22296.75 | 32.98 | 8.01 | 40.99 | 63.50 | -22.51 | AVG |


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - NUMBER OF HOPPING FREQUENCY

Test Mode: TX Mode_1Mbps


| Test Mode | Hopping Mode_1Mbps | Limit | Test Result |
|-----------------------------|--------------------|-------|-------------|
| Number of Hopping Frequency | 79 | 15 | Pass |

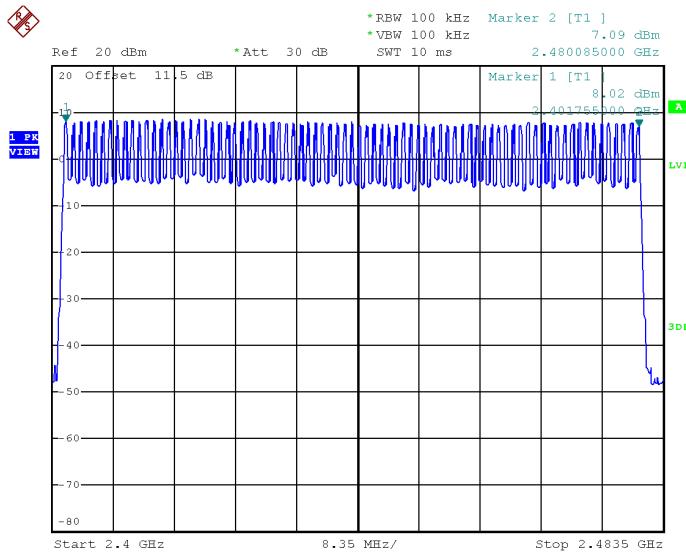

Date: 27.MAY.2024 14:46:23

Test Mode: TX Mode_3Mbps

| Test Mode | Hopping Mode_3Mbps | Limit | Test Result |
|-----------------------------|--------------------|-------|-------------|
| Number of Hopping Frequency | 79 | 15 | Pass |









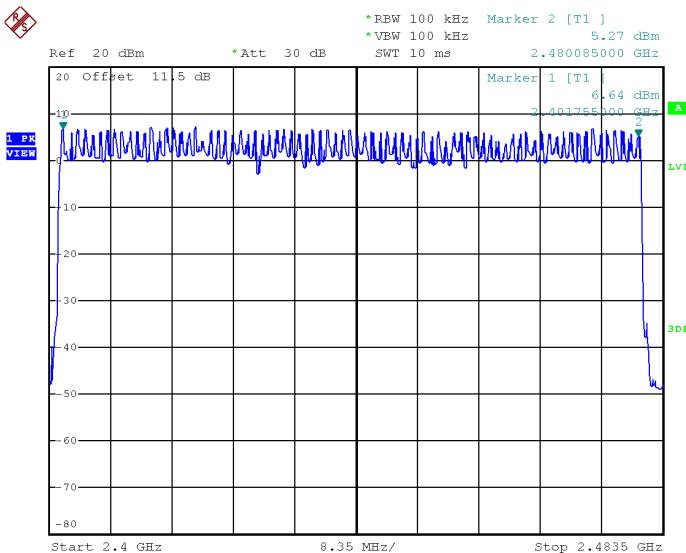


Date: 27.MAY.2024 15:14:06

APPENDIX F - AVERAGE TIME OF OCCUPANCY




| | |
|-----------|--------------------|
| Test Mode | Hopping Mode_1Mbps |
|-----------|--------------------|

| Data Packet | Frequency (MHz) | Pulse Duration (ms) | Dwell Time (s) | Limits (s) | Test Result |
|-------------|-----------------|---------------------|----------------|------------|-------------|
| DH1 | 2402 | 0.3800 | 0.1216 | 0.4000 | Pass |
| DH3 | 2402 | 1.6400 | 0.2624 | 0.4000 | Pass |
| DH5 | 2402 | 2.8800 | 0.3072 | 0.4000 | Pass |
| DH1 | 2441 | 0.3850 | 0.1232 | 0.4000 | Pass |
| DH3 | 2441 | 1.6400 | 0.2624 | 0.4000 | Pass |
| DH5 | 2441 | 2.8800 | 0.3072 | 0.4000 | Pass |
| DH1 | 2480 | 0.3850 | 0.1232 | 0.4000 | Pass |
| DH3 | 2480 | 1.6400 | 0.2624 | 0.4000 | Pass |
| DH5 | 2480 | 2.8800 | 0.3072 | 0.4000 | Pass |

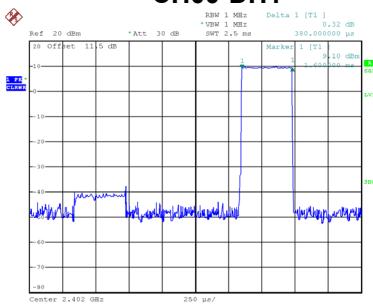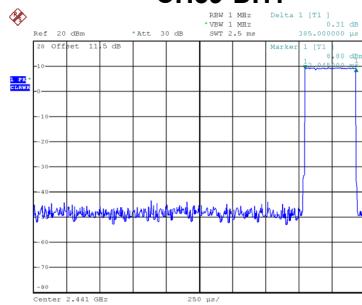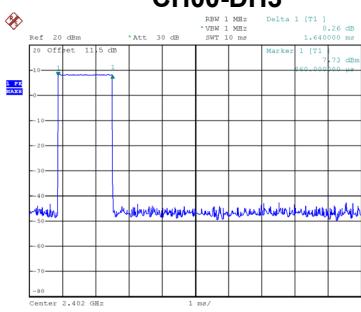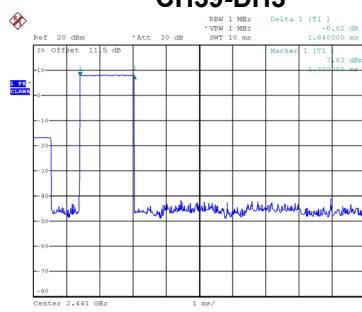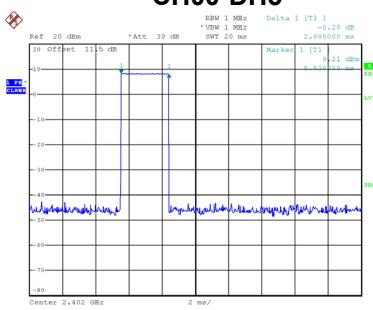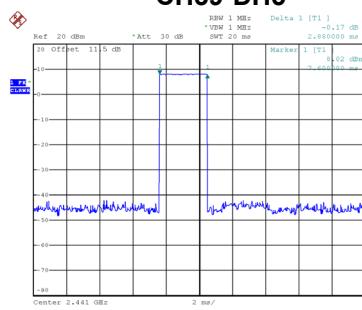
CH00-DH1

CH39-DH1

CH78-DH1

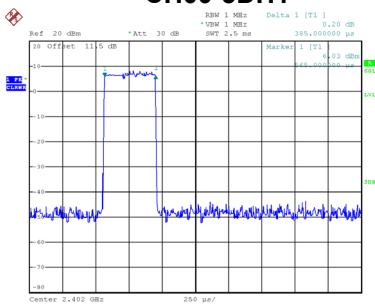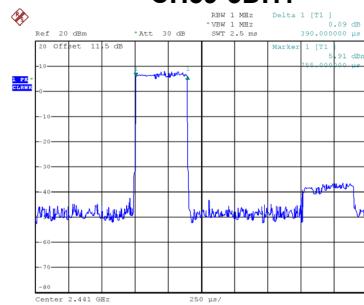CH00-DH3

CH39-DH3

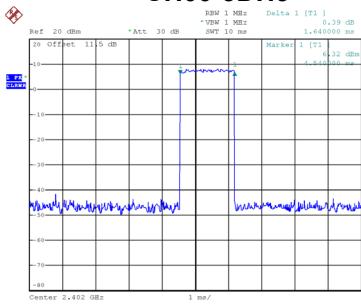CH78-DH3

CH00-DH5

CH39-DH5

CH78-DH5


| | |
|-----------|--------------------|
| Test Mode | Hopping Mode_3Mbps |
|-----------|--------------------|


| Data Packet | Frequency (MHz) | Pulse Duration (ms) | Dwell Time (s) | Limits (s) | Test Result |
|-------------|-----------------|---------------------|----------------|------------|-------------|
| 3DH1 | 2402 | 0.3850 | 0.1232 | 0.4000 | Pass |
| 3DH3 | 2402 | 1.6400 | 0.2624 | 0.4000 | Pass |
| 3DH5 | 2402 | 2.9200 | 0.3115 | 0.4000 | Pass |
| 3DH1 | 2441 | 0.3900 | 0.1248 | 0.4000 | Pass |
| 3DH3 | 2441 | 1.6400 | 0.2624 | 0.4000 | Pass |
| 3DH5 | 2441 | 2.8800 | 0.3072 | 0.4000 | Pass |
| 3DH1 | 2480 | 0.3900 | 0.1248 | 0.4000 | Pass |
| 3DH3 | 2480 | 1.6400 | 0.2624 | 0.4000 | Pass |
| 3DH5 | 2480 | 2.8800 | 0.3072 | 0.4000 | Pass |

CH00-3DH1

CH39-3DH1

CH78-3DH1



Date: 27.MAY.2024 15:08:30

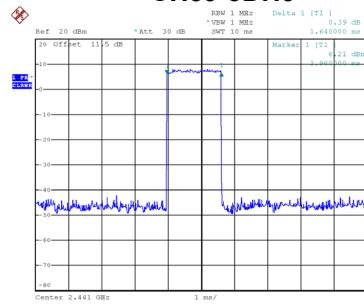CH00-3DH3


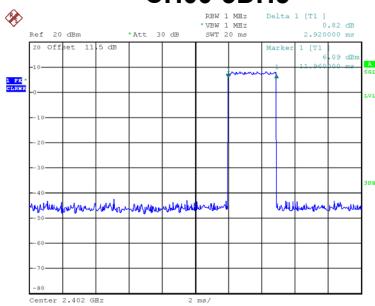
Date: 27.MAY.2024 15:08:54

CH39-3DH3


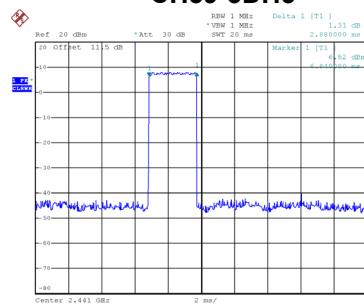
Date: 27.MAY.2024 15:09:01

CH78-3DH3



Date: 27.MAY.2024 15:16:13

CH00-3DH5


Date: 27.MAY.2024 15:16:39

CH39-3DH5


Date: 27.MAY.2024 15:16:43

CH78-3DH5


Date: 27.MAY.2024 15:16:57

Date: 27.MAY.2024 15:17:03

Date: 27.MAY.2024 15:17:12

APPENDIX G - HOPPING CHANNEL SEPARATION


| | |
|-----------|--------------------|
| Test Mode | Hopping Mode_1Mbps |
|-----------|--------------------|

| Channel | Frequency (MHz) | Channel Separation (MHz) | 2/3 of 20 dB Bandwidth (MHz) | Test Result |
|---------|-----------------|--------------------------|------------------------------|-------------|
| 00 | 2402 | 1.107 | 0.632 | Pass |
| 39 | 2441 | 1.008 | 0.631 | Pass |
| 78 | 2480 | 1.005 | 0.628 | Pass |



| | |
|-----------|--------------------|
| Test Mode | Hopping Mode_3Mbps |
|-----------|--------------------|




| Channel | Frequency (MHz) | Channel Separation (MHz) | 2/3 of 20 dB Bandwidth (MHz) | Test Result |
|---------|-----------------|--------------------------|------------------------------|-------------|
| 00 | 2402 | 1.014 | 0.871 | Pass |
| 39 | 2441 | 1.000 | 0.865 | Pass |
| 78 | 2480 | 1.002 | 0.876 | Pass |

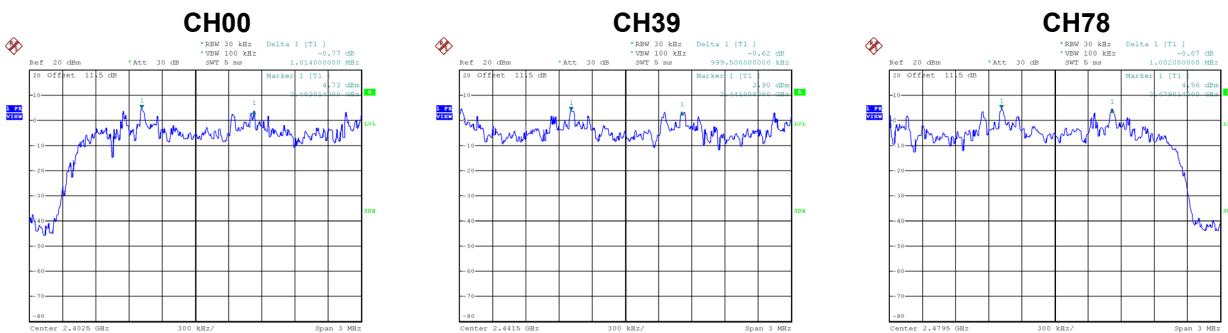

APPENDIX H - BANDWIDTH

Test Mode TX Mode _1Mbps

| Channel | Frequency (MHz) | 20 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 00 | 2402 | 0.948 | 0.876 |
| 39 | 2441 | 0.946 | 0.860 |
| 78 | 2480 | 0.942 | 0.856 |

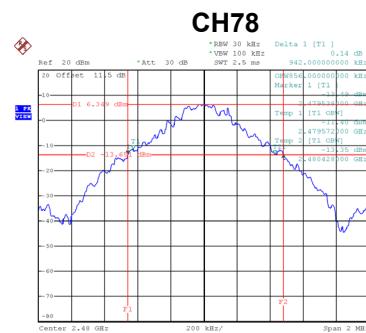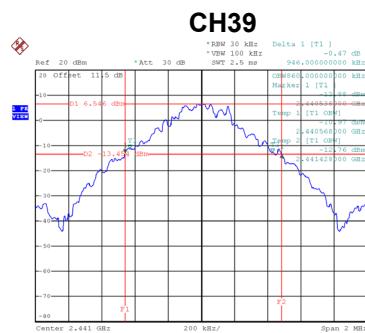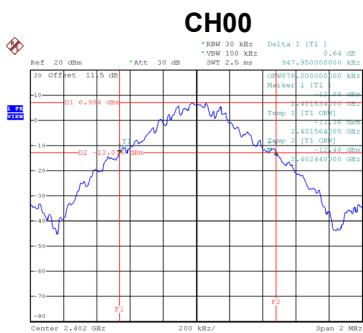




Date: 27.MAY.2024 14:27:59

Date: 27.MAY.2024 14:32:28

Date: 27.MAY.2024 14:34:14

Test Mode TX Mode _3Mbps

| Channel | Frequency (MHz) | 20 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) |
|---------|-----------------|-----------------------|-------------------------------|
| 00 | 2402 | 1.306 | 1.192 |
| 39 | 2441 | 1.298 | 1.188 |
| 78 | 2480 | 1.314 | 1.192 |

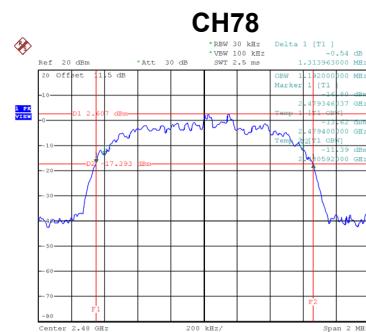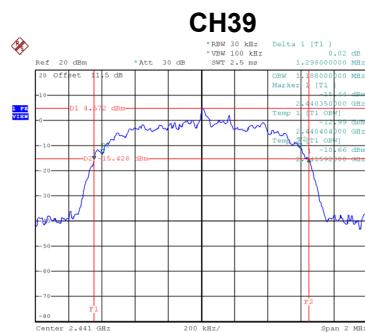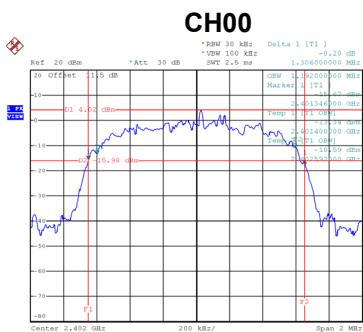

Date: 27.MAY.2024 15:03:00

Date: 27.MAY.2024 15:04:55



Date: 27.MAY.2024 15:06:40

APPENDIX I - MAXIMUM OUTPUT POWER

| | |
|-----------|----------------|
| Test Mode | TX Mode _1Mbps |
|-----------|----------------|

| Channel | Frequency (MHz) | Output Power (dBm) | Max. Limit (dBm) | Max. Limit (W) | Test Result |
|---------|-----------------|--------------------|------------------|----------------|-------------|
| 00 | 2402 | 5.31 | 20.97 | 0.1250 | Pass |
| 39 | 2441 | 5.04 | 20.97 | 0.1250 | Pass |
| 78 | 2480 | 4.46 | 20.97 | 0.1250 | Pass |

Note: Output power = Measure result + Cable loss

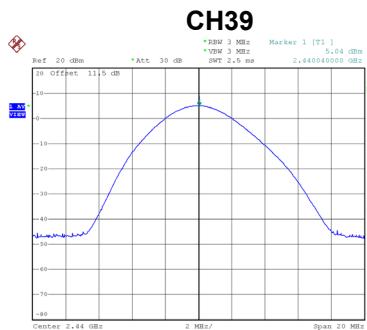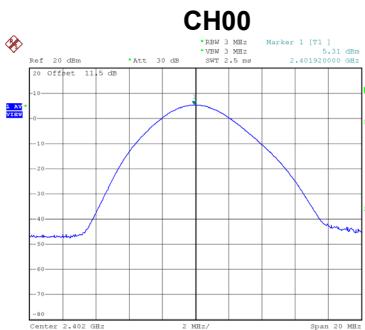

Date: 26.JUN.2024 10:16:59




Date: 26.JUN.2024 10:19:46

Date: 26.JUN.2024 10:20:23

| | |
|-----------|----------------|
| Test Mode | TX Mode _2Mbps |
|-----------|----------------|

| Channel | Frequency (MHz) | Output Power (dBm) | Max. Limit (dBm) | Max. Limit (W) | Test Result |
|---------|-----------------|--------------------|------------------|----------------|-------------|
| 00 | 2402 | 8.69 | 20.97 | 0.1250 | Pass |
| 39 | 2441 | 8.52 | 20.97 | 0.1250 | Pass |
| 78 | 2480 | 8.53 | 20.97 | 0.1250 | Pass |

Note: Output power = Measure result + Cable loss

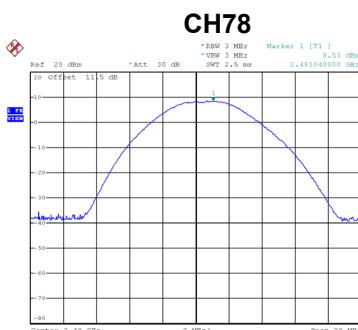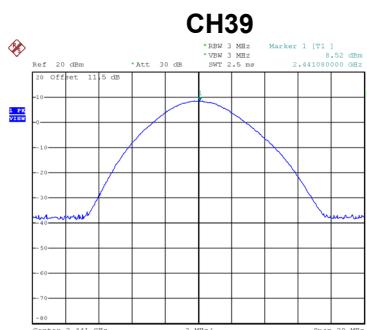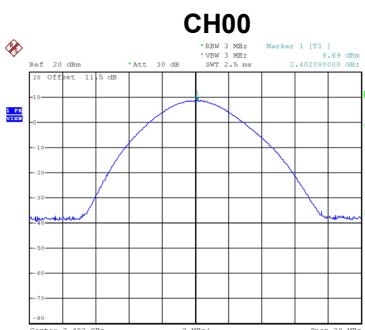

Date: 27.MAY.2024 15:16:25




Date: 27.MAY.2024 15:19:08

Date: 27.MAY.2024 15:19:36

| | |
|-----------|----------------|
| Test Mode | TX Mode _3Mbps |
|-----------|----------------|

| Channel | Frequency (MHz) | Output Power (dBm) | Max. Limit (dBm) | Max. Limit (W) | Test Result |
|---------|-----------------|--------------------|------------------|----------------|-------------|
| 00 | 2402 | 7.74 | 20.97 | 0.1250 | Pass |
| 39 | 2441 | 7.27 | 20.97 | 0.1250 | Pass |
| 78 | 2480 | 6.54 | 20.97 | 0.1250 | Pass |

Note: Output power = Measure result + Cable loss

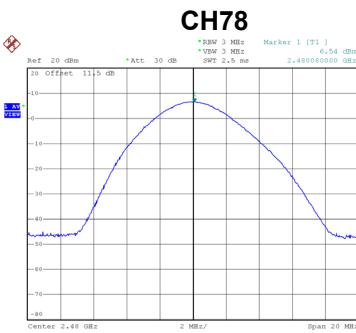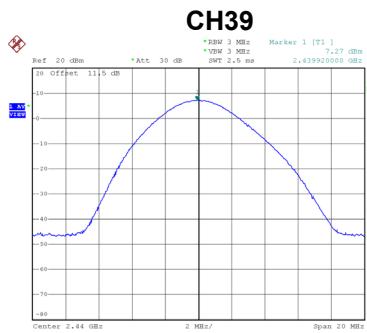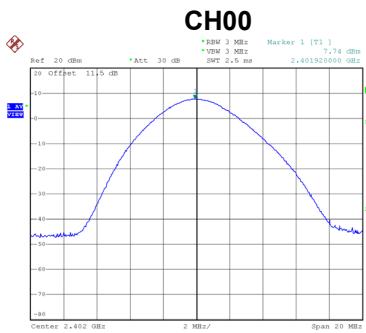

Date: 26.JUN.2024 10:37:26

Date: 26.JUN.2024 10:38:17


Date: 26.JUN.2024 10:39:45

APPENDIX J - CONDUCTED SPURIOUS EMISSION

Test Mode


TX Mode _1Mbps

Bandedge CH00 (Lower)

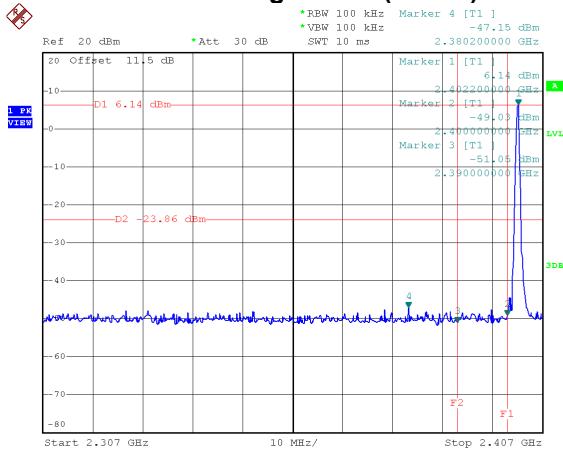


Date: 26.JUN.2024 10:33:41

Bandedge CH78 (Upper)

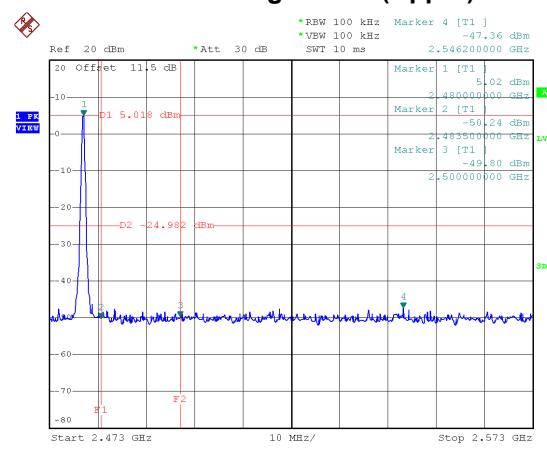


Date: 26.JUN.2024 10:35:12

Hopping on mode (Lower)

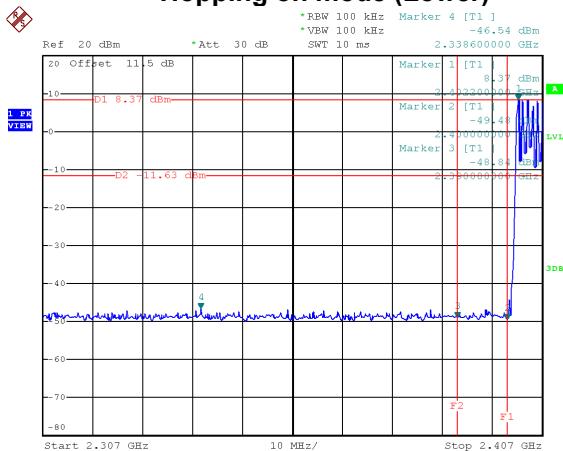


Date: 27.MAY.2024 14:42:00

Hopping on mode (Upper)

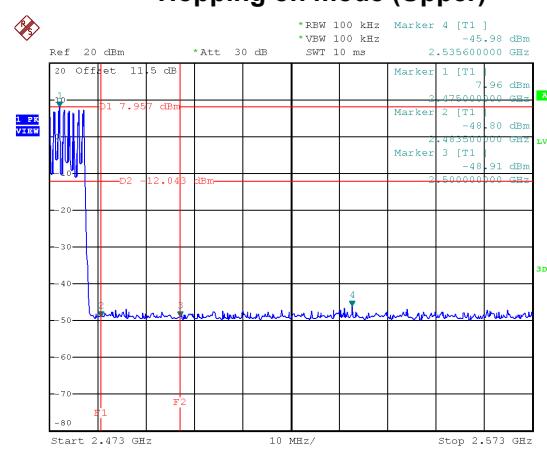


Date: 27.MAY.2024 14:42:35


CH00 – 10th Harmonic of the fundamental frequency

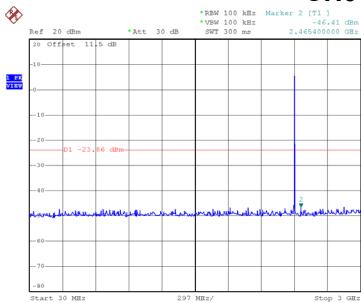

Date: 26.JUN.2024 10:33:55

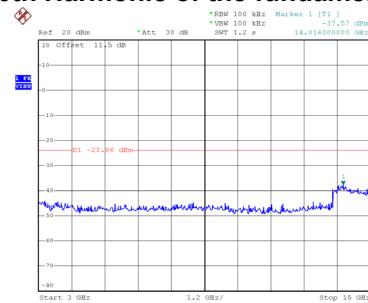


Date: 26.JUN.2024 10:34:03

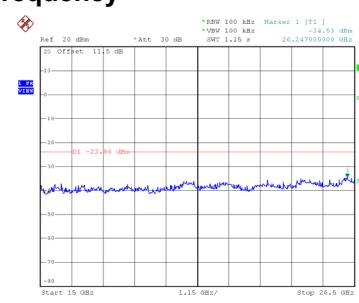


Date: 26.JUN.2024 10:34:11


CH39 – 10th Harmonic of the fundamental frequency

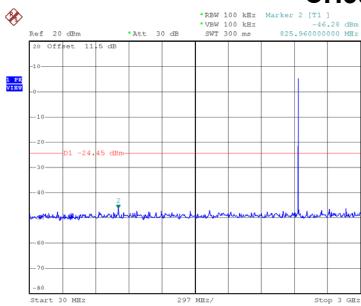

Date: 26.JUN.2024 10:34:45

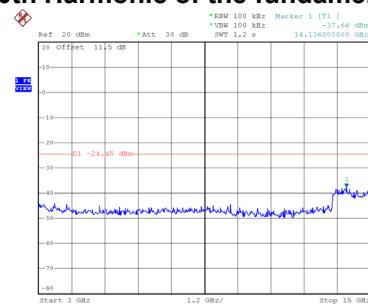


Date: 26.JUN.2024 10:34:53

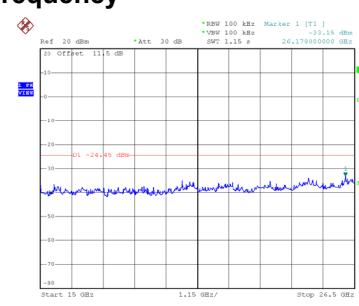


Date: 26.JUN.2024 10:35:01


CH78 – 10th Harmonic of the fundamental frequency

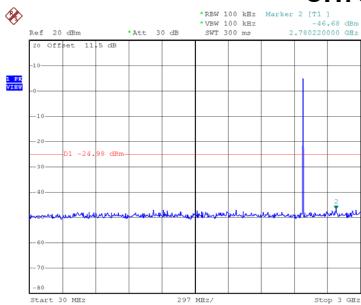

Date: 26.JUN.2024 10:35:26

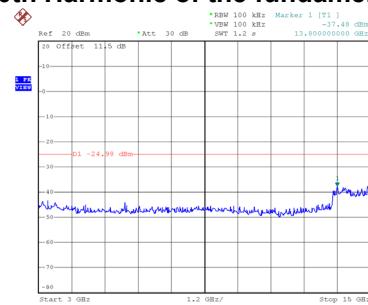


Date: 26.JUN.2024 10:35:34

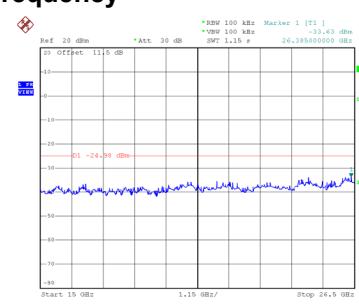


Date: 26.JUN.2024 10:35:42

Test Mode


TX Mode _3Mbps

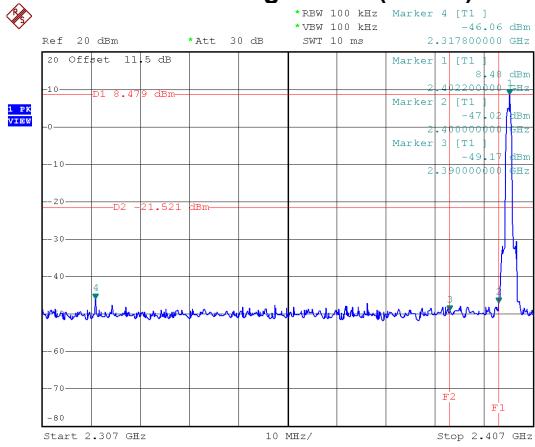Bandedge CH00 (Lower)


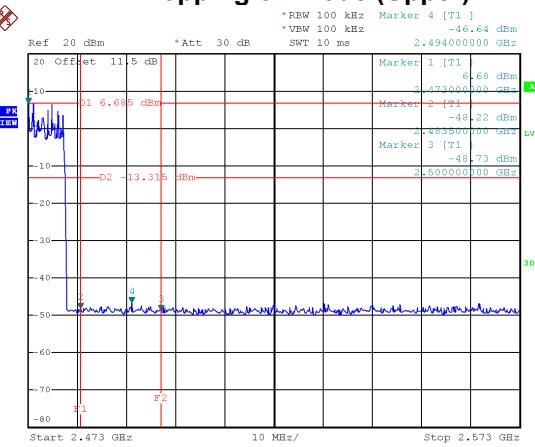
Date: 26.JUN.2024 10:41:58

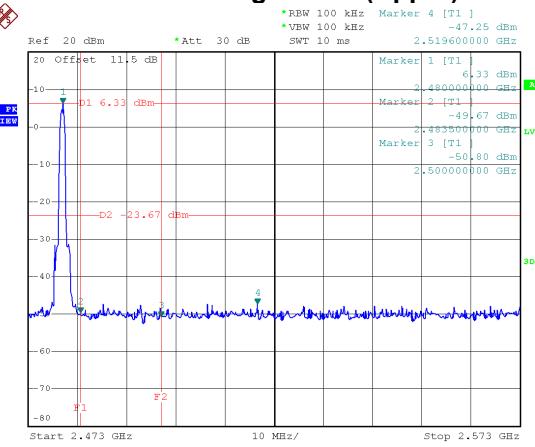Bandedge CH78 (Upper)


Date: 26.JUN.2024 10:49:38



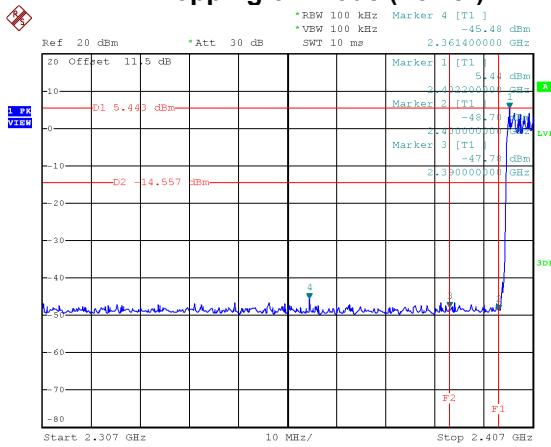
Hopping on mode (Lower)


Date: 27.MAY.2024 15:14:40

Hopping on mode (Upper)


Date: 27.MAY.2024 15:15:15

CH00 – 10th Harmonic of the fundamental frequency

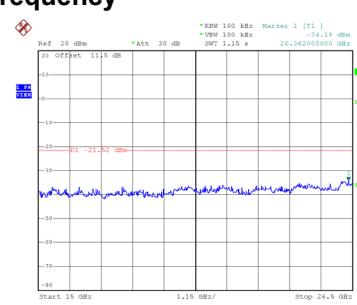
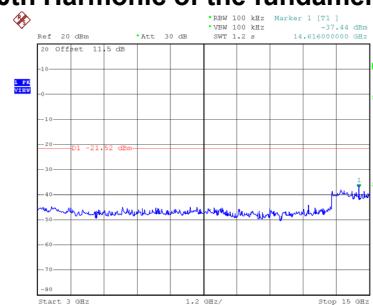
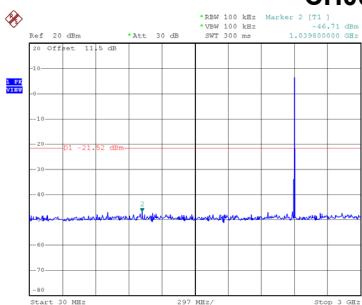


Date: 26.JUN.2024 10:42:12

Date: 26.JUN.2024 10:42:20

Date: 26.JUN.2024 10:42:20

CH39 – 10th Harmonic of the fundamental frequency

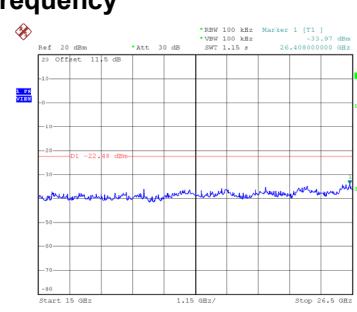
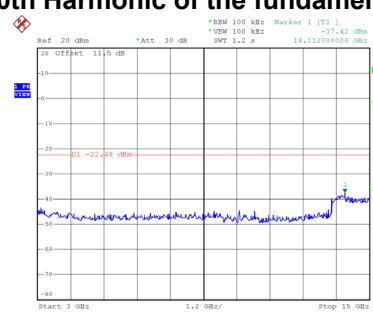
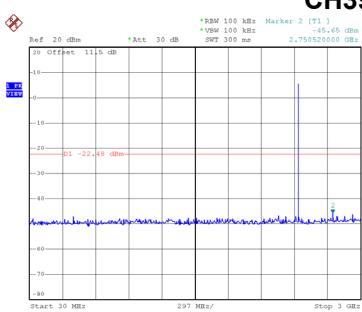


Date: 26.JUN.2024 10:47:40

Date: 26.JUN.2024 10:47:49

Date: 26.JUN.2024 10:47:57

CH78 – 10th Harmonic of the fundamental frequency

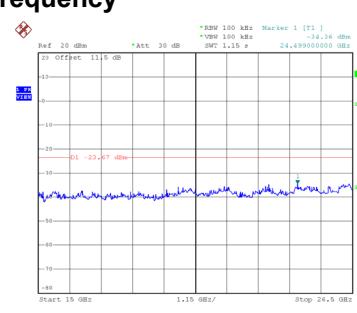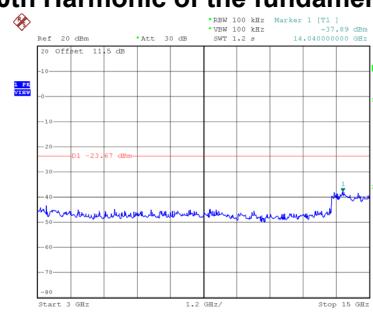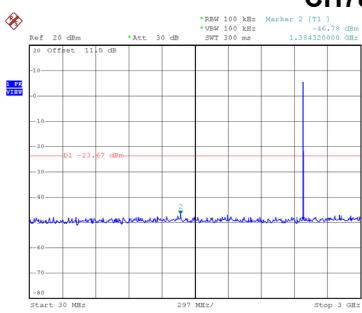

Date: 26.JUN.2024 10:49:52

Date: 26.JUN.2024 10:50:00

Date: 26.JUN.2024 10:50:08

APPENDIX K - DECLARATION FOR BLUETOOTH DEVICE

1. Output power and channel separation of a Bluetooth device in the different operating modes:

The different operating modes (data-mode, acquisition-mode) of a Bluetooth device has no influence on the output power and the channel spacing. There is only one transmitter which is driven by identical input parameters concerning these two parameters.

Only a different hopping sequence will be used. For this reason the check of these RF parameters in one op-mode is sufficient.

2. Frequency range of a Bluetooth device:

Hereby we declare that the maximum frequency of this device is: 2402 - 2480MHz. This is according to the Bluetooth Core Specification (+ critical errata) for devices which will be operated in the USA.

This was checked during the Bluetooth Qualification tests (Test Case: TRM/CA/04-E). Other frequency ranges (e.g. for Spain, France, Japan) which are allowed according the Core Specification are not supported by this device.

3. Co-ordination of the hopping sequence in data mode to avoid simultaneous occupancy by multiple transmitters:

Bluetooth units which want to communicate with other units must be organised in a structure called piconet. This piconet consist of max. 8 Bluetooth units. One unit is the master the other seven are the slaves. The master co-ordinates frequency occupation in this piconet for all units. As the master hop sequence is derived from its BD address which is unique for each Bluetooth device, additional masters intending to establish new piconets will always use different hop sequences.

4. Example of a hopping sequence in data mode:

Example of a 79 hopping sequence in data mode:

40, 21, 44, 23, 42, 53, 46, 55, 48, 33, 52, 35, 50, 65, 54, 67, 56, 37, 60, 39, 58, 69, 62, 71, 64, 25, 68, 27, 66, 57, 70, 59, 72, 29, 76, 31, 74, 61, 78, 63, 01, 41, 05, 43, 03, 73, 07, 75, 09, 45, 13, 47, 11, 77, 15, 00, 64, 49, 66, 53, 68, 02, 70, 06, 01, 51, 03, 55, 05, 04

5. Equally average use of frequencies in data mode and behaviour for short transmissions:

The generation of the hopping sequence in connection mode depends essentially on two input values:

- a) LAP/UAP of the master of the connection.
- b) Internal master clock.

The LAP (lower address part) are the 24 LSB's of the 48 BD_ADDRESS. The BD_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24 MSB's of the 48 BD_ADDRESS.

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For synchronisation with other units only offset are used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5 µs. The clock has a cycle of about one day (23h30). In most case it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire.

LAP (24 bits), 4 LSB's (4 bits) (Input 1) and the 27 MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR- operations) are performed to generate the sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behaviour:

The first connection between the two devices is established, a hopping sequence was generated. For transmitting the wanted data the complete hopping sequence was not used. The connection ended.

The second connection will be established. A new hopping sequence is generated. Due to the fact that the Bluetooth clock has a different value, because the period between the two transmission is longer (and it cannot be shorter) than the minimum resolution of the clock (312.5 µs). The hopping sequence will always differ from the first one.

6. Receiver input bandwidth and behaviour for repeated single or multiple packets:

The input bandwidth of the receiver is 1 MHz. In every connection one Bluetooth device is the master and the other one is the slave. The master determines the hopping sequence (see chapter 5). The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master.

Additionally the type of connection (e.g. single or multislots packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings.

Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.