





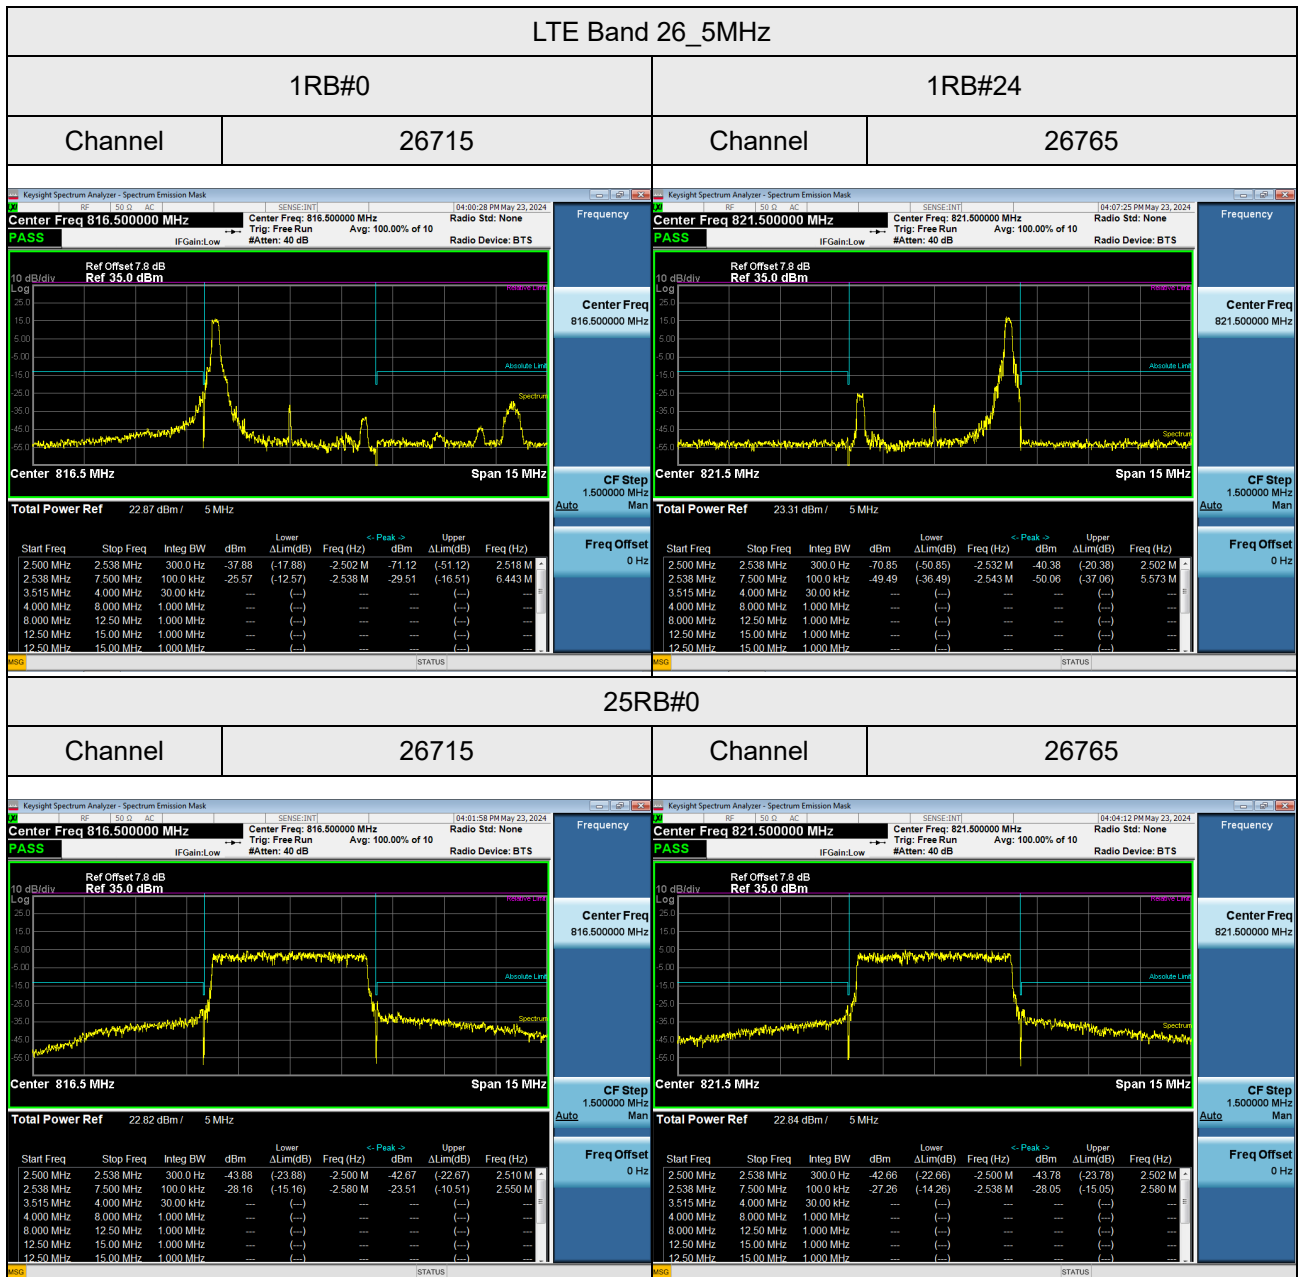


APPENDIX H - PEAK TO AVERAGE RATIO


LTE Band 26_1.4MHz					
Channel	Frequency (MHz)	Peak To Average Ratio (dB)		Max. Limit (dB)	Result
		QPSK	16QAM		
26697	814.7	3.94	4.85	13	Pass
26740	819	4.48	5.32	13	Pass
26783	823.3	4.36	5.28	13	Pass

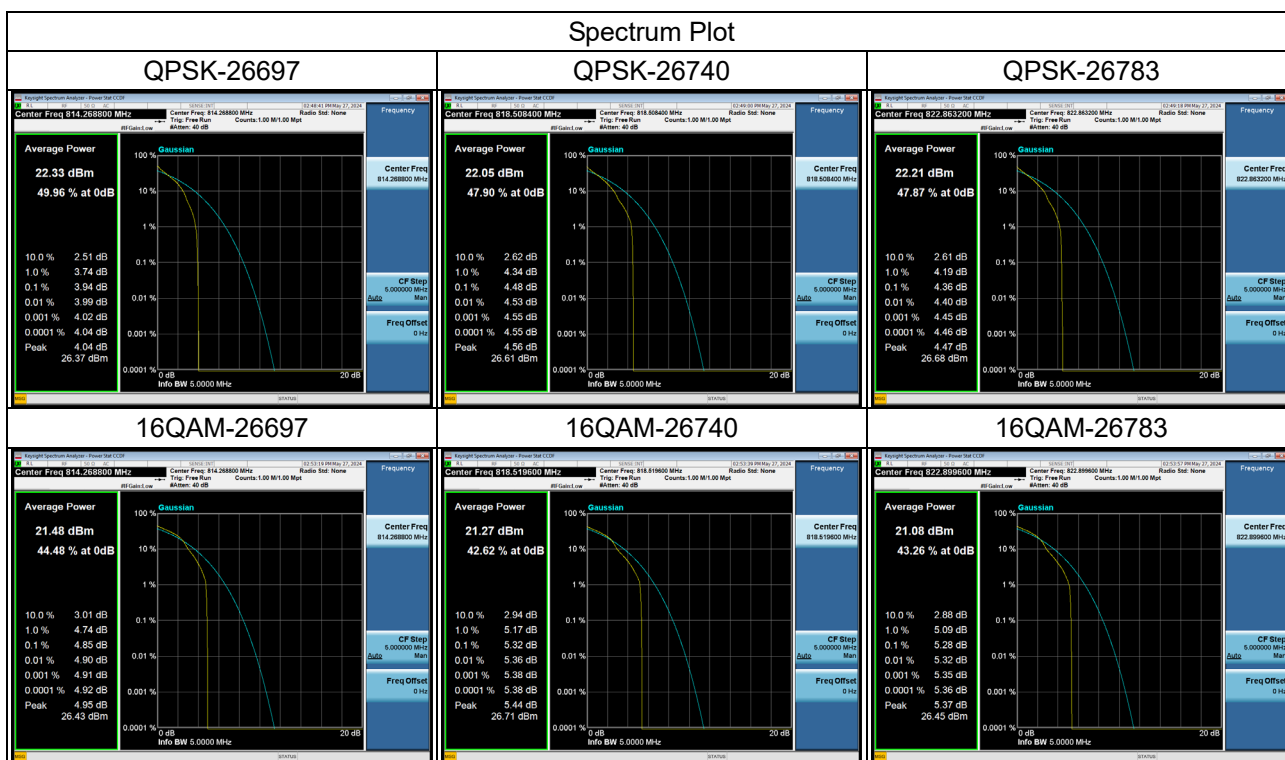


LTE Band 26_3MHz					
Channel	Frequency (MHz)	Peak To Average Ratio (dB)		Max. Limit (dB)	Result
		QPSK	16QAM		
26705	815.5	4.03	4.68	13	Pass
26740	819	4.37	5.34	13	Pass
26775	822.5	4.38	5.21	13	Pass

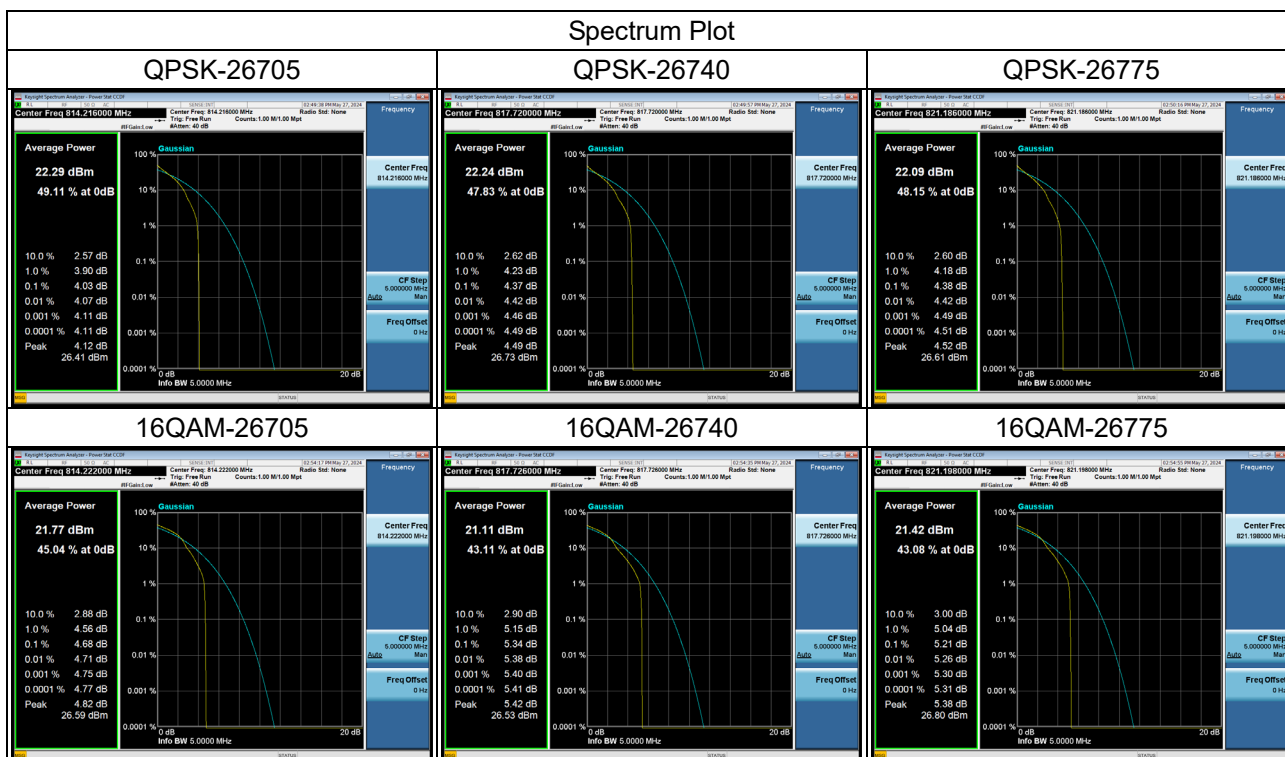

LTE Band 26_5MHz					
Channel	Frequency (MHz)	Peak To Average Ratio (dB)		Max. Limit (dB)	Result
		QPSK	16QAM		
26715	816.5	4.04	4.89	13	Pass
26740	819	4.44	5.14	13	Pass
26765	821.5	4.37	5.28	13	Pass

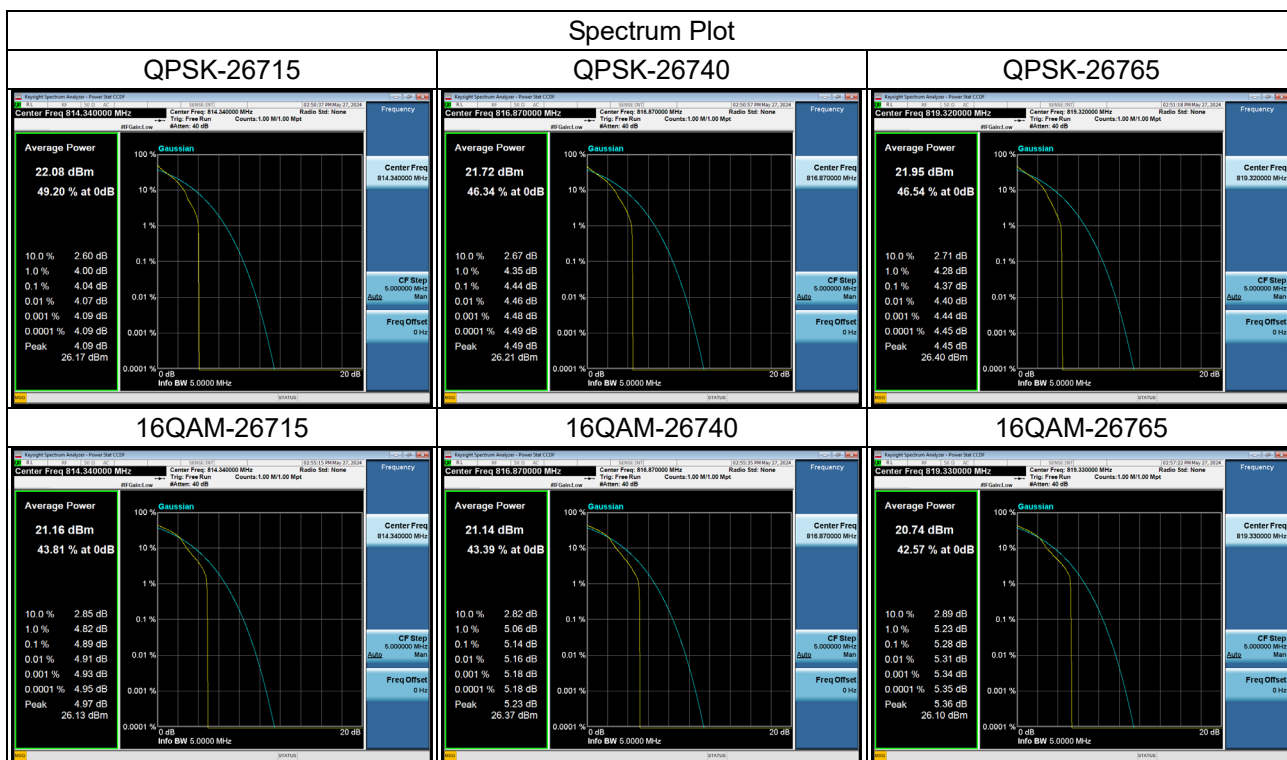

LTE Band 26_10MHz					
Channel	Frequency (MHz)	Peak To Average Ratio (dB)		Max. Limit (dB)	Result
		QPSK	16QAM		
26740	819	3.94	4.86	13	Pass

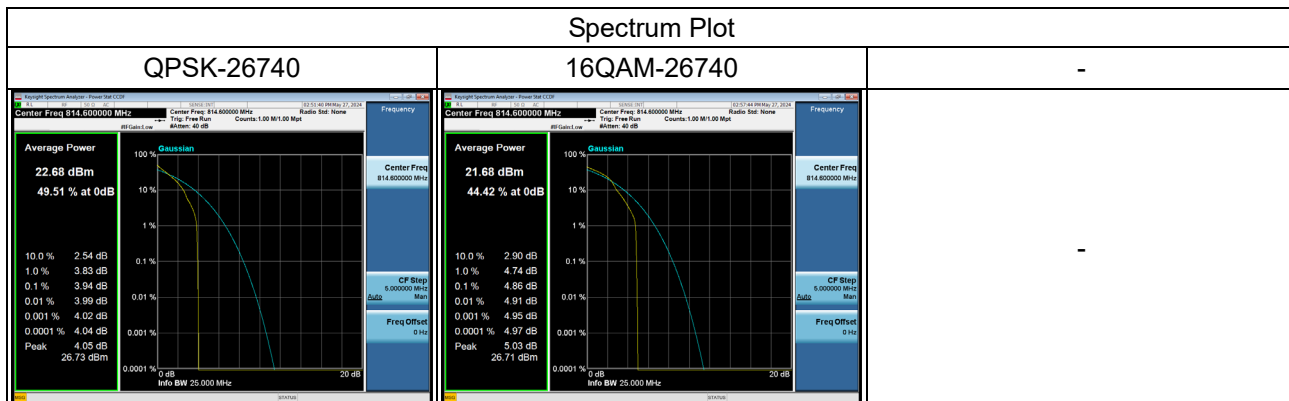

APPENDIX I - FREQUENCY STABILITY

Test Mode	LTE Band 26_CH26740_10MHz
-----------	---------------------------

Frequency error versus temperature and supply voltage			
Temperature (°C)	Frequency error (Hz)	ppm	Limit
50	-5.78	-0.0071	±2.5ppm
40	-6.07	-0.0074	
30	4.04	0.0049	
20	4.67	0.0057	
10	12.06	0.0147	
0	-6.93	-0.0085	
-10	3.99	0.0049	
-20	-4.87	-0.0059	
-30	-4.92	-0.0060	
Minimun Voltage	6.37	0.0078	
Maximun Voltage	-6.41	-0.0078	
Normal Voltage	5.1	0.0062	

Note: Nominal voltage= 3.8V, Maximum voltage= 4.35V, Minimum voltage= 3.5V.

End of Test Report