


**FCC PART 15B**  
**MEASUREMENT AND TEST REPORT**  
**FOR**  
**QED FACTORY, INC.**

**631 N LARCHMONT U-1, LOS ANGELES, CALIFORNIA 90004, USA**

**FCC ID: ZMPWMA1104**

<b>Report Concerns:</b> Original Report	<b>Equipment Type:</b> WIRELESS MODULE
<b>Model:</b>	<u>WMA1104</u>
<b>Report No.:</b>	<u>STR11058035E-3</u>
<b>Test Date:</b>	<u>2011-05-06 to 2011-05-25</u>
<b>Issue Date:</b>	<u>2011-06-13</u>
<b>Tested By:</b>	<u>Jason Chen / Engineer</u> 
<b>Reviewed By:</b>	<u>Lahm Peng / EMC Manager</u> 
<b>Approved &amp; Authorized By:</b>	<u>Jandy so / PSQ Manager</u> 
<b>Prepared By:</b>	<b>SEM.Test Compliance Service Co., Ltd</b> 3/F, Jinbao Commerce Building, Xin'an Fanshen Road, Bao'an District, Shenzhen, P.R.C. (518101) Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: <a href="http://www.semtest.com.cn">www.semtest.com.cn</a>

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permission by SEM.Test Compliance Service Co., Ltd.

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION .....</b>	<b>3</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	3
1.3 TEST METHODOLOGY.....	3
1.4 TEST FACILITY .....	4
1.5 EUT EXERCISE SOFTWARE .....	4
1.6 ACCESSORIES EQUIPMENT LIST AND DETAILS .....	4
1.7 EUT CABLE LIST AND DETAILS .....	4
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>5</b>
<b>3. §15.107 (A)- CONDUCTED EMISSION .....</b>	<b>6</b>
3.1 MEASUREMENT UNCERTAINTY .....	6
3.2 TEST EQUIPMENT LIST AND DETAILS .....	6
3.3 TEST PROCEDURE.....	6
3.4 BASIC TEST SETUP BLOCK DIAGRAM.....	6
3.5 ENVIRONMENTAL CONDITIONS .....	7
3.6 TEST RECEIVER SETUP .....	7
3.7 SUMMARY OF TEST RESULTS/PLOTS .....	7
3.8 CONDUCTED EMISSIONS TEST DATA.....	7
<b>4. §15.109(A)- RADIATED EMISSION .....</b>	<b>10</b>
4.1 MEASUREMENT UNCERTAINTY .....	10
4.2 TEST EQUIPMENT LIST AND DETAILS .....	10
4.3 TEST PROCEDURE.....	10
4.4 TEST RECEIVER SETUP .....	11
4.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	11
4.6 ENVIRONMENTAL CONDITIONS .....	11
4.7 SUMMARY OF TEST RESULTS/PLOTS .....	11

## 1. GENERAL INFORMATION

---

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: QED FACTORY, INC.  
Address of applicant: 631 N LARCHMONT U-1, LOS ANGELES, CALIFORNIA  
90004, USA

Manufacturer: QED FACTORY, INC.  
Address of manufacturer: 631 N LARCHMONT U-1, LOS ANGELES, CALIFORNIA  
90004, USA

#### General Description of E.U.T

Items	Description
EUT Description:	WIPELESS MODULE
Trade Name:	QED
Model No.:	WMA1104
Rated Voltage:	USB 5V
Rated Current:	/
Size:	6.9X4.5X7.3 cm
For more information refer to the circuit diagram form and the user's manual.	

*The test data is gathered from a production sample, provided by the manufacturer.*

### 1.2 Test Standards

The following report is prepared on behalf of the QED FACTORY, INC. in accordance with Part 2, Subpart J, and Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15.107, and 15.109 rules.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which results in lowering the emission/immunity, should be checked to ensure compliance has been maintained.

### 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The equipment under test (EUT) was configured to measure its highest possible susceptibility against the tested phenomena. The test modes were adapted accordingly in reference to the Operating Instructions.

## 1.4 Test Facility

- **FCC – Registration No.: 994117**

SEM.Test Compliance Services Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 994117.

- **Industry Canada (IC) Registration No.: 7673A**

The 3m Semi-anechoic chamber of SEM.Test Compliance Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 7673A.

- **CNAS Registration No.: L4062**

Shenzhen SEM.Test Electronics Service Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 3/F, Jinbao Commerce Building, Xin'an Fanshen Road, Bao'an District, Shenzhen, P.R.C (518101)

## 1.5 EUT Exercise Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the system components. The test software, provided by the customer, is started while the EUT is on to simulate the normal work. under the Windows XP terminal.

## 1.6 Accessories Equipment List and Details

Description	Manufacturer	Model	Serial Number
PC	DELL	DCSM1F	JX5HW2X
Display	DELL	170SC	/
Mouse	DELL	MOC5UQ	/
Keyboard	DELL	SK8115	CN-ODJ331-71616-06A-01Q4

## 1.7 EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
Signal Cable	0.25	Unshielded	Without Core
/	/	/	/

**2. SUMMARY OF TEST RESULTS**

---

<b>Description of Test</b>	<b>Result</b>
§15.107 (a) Conducted Emission	Compliant
§15.109(a) Radiated Emission	Compliant

### 3. §15.107 (a)- CONDUCTED EMISSION

#### 3.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is  $\pm 2.88$  dB.

#### 3.2 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2010-12-20	2011-12-19
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2010-12-20	2011-12-19
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2010-12-20	2011-12-19

#### 3.3 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.107 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

#### 3.4 Basic Test Setup Block Diagram

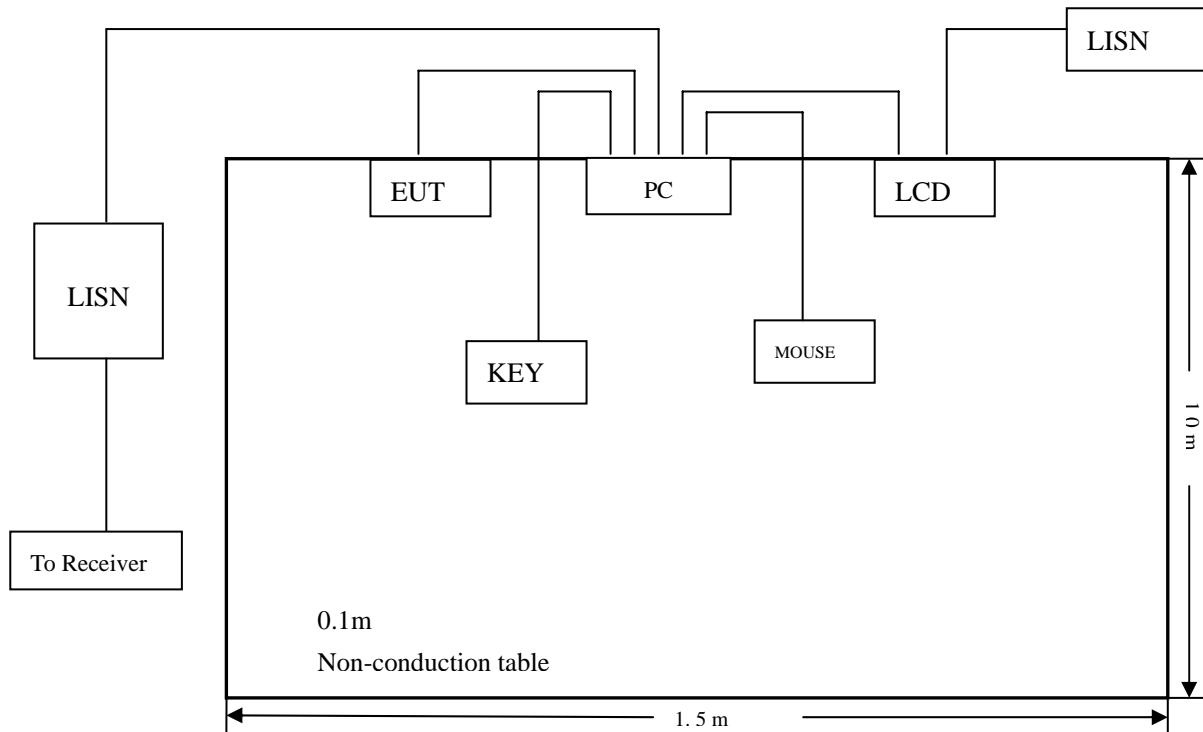

### 3.5 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

### 3.6 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency ..... 150 kHz  
 Stop Frequency ..... 30 MHz  
 Sweep Speed ..... Auto  
 IF Bandwidth ..... 10 kHz  
 Quasi-Peak Adapter Bandwidth ..... 9 kHz  
 Quasi-Peak Adapter Mode ..... Normal

### 3.7 Summary of Test Results/Plots


According to the data in section 3.8, the EUT complied with the FCC Part 15B Conducted margin for a Class B device, with the *worst* margin reading of:

**-15.13 dB $\mu$ V at 23.982 MHz in the Neutral mode, Average detector, 0.15-30MHz**

### 3.8 Conducted Emissions Test Data

LINE CONDUCTED EMISSIONS				FCC PART15.107	
Frequency	Amplitude	Detector	Phase	Limit	Margin
MHz	dB $\mu$ V	QP/Ave/Pk	Line/Neutral	dB $\mu$ V	dB
23.982	34.86	AV	Neutral	50.00	-15.13
23.982	34.39	AV	Line	50.00	-15.60
0.266	36.13	Peak	Neutral	61.23	-25.10
0.202	36.37	Peak	Line	63.52	-27.15

*Note: Emission attenuated more than 20dB is not reported.*

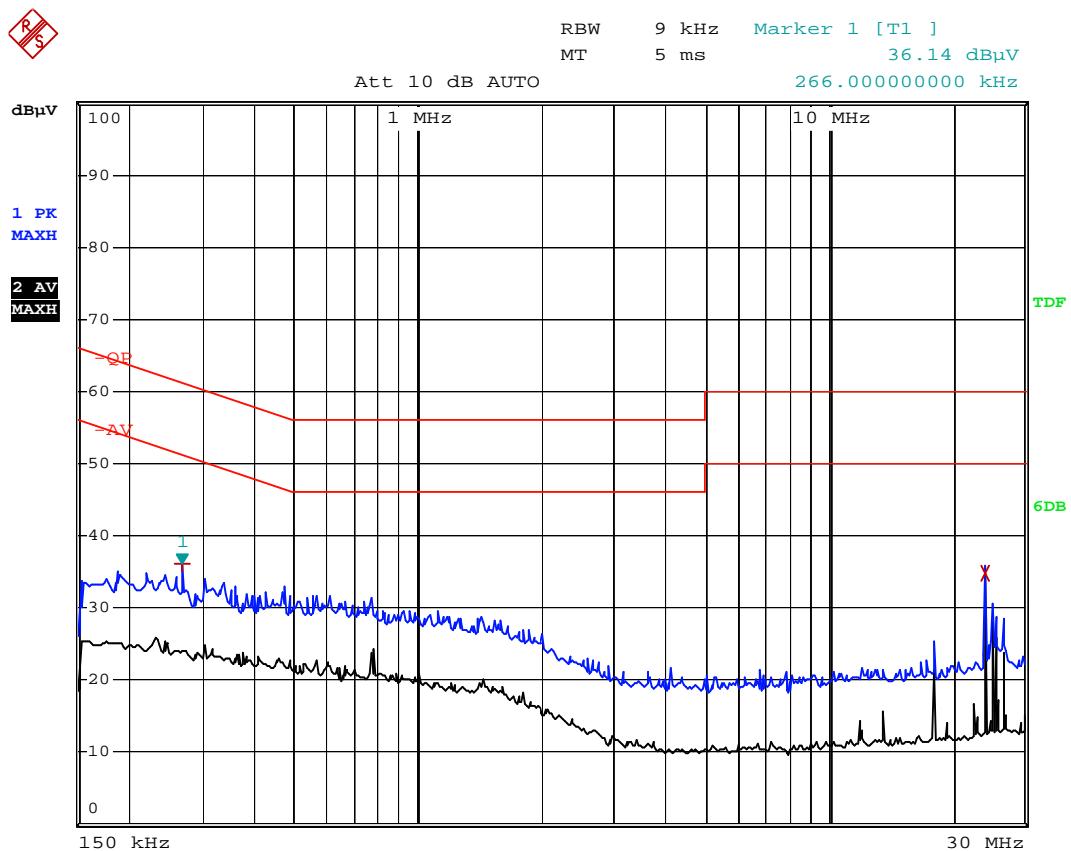**Plot of Conducted Emissions Test Data***Conducted Disturbance**EUT: WIRELESS MODULE**M/N: WMA1104**Operating Condition: Operating**Test Specification: N**Comment: AC 120V/60Hz USB 5V*

## Plot of Conducted Emissions Test Data

### *Conducted Disturbance*


## *EUT: WIRELESS MODULE*

*M/N: WMA1104*

### *Operating Condition: Operating*

### *Test Specification: L*

*Comment: AC 120V/60Hz USB 5V*

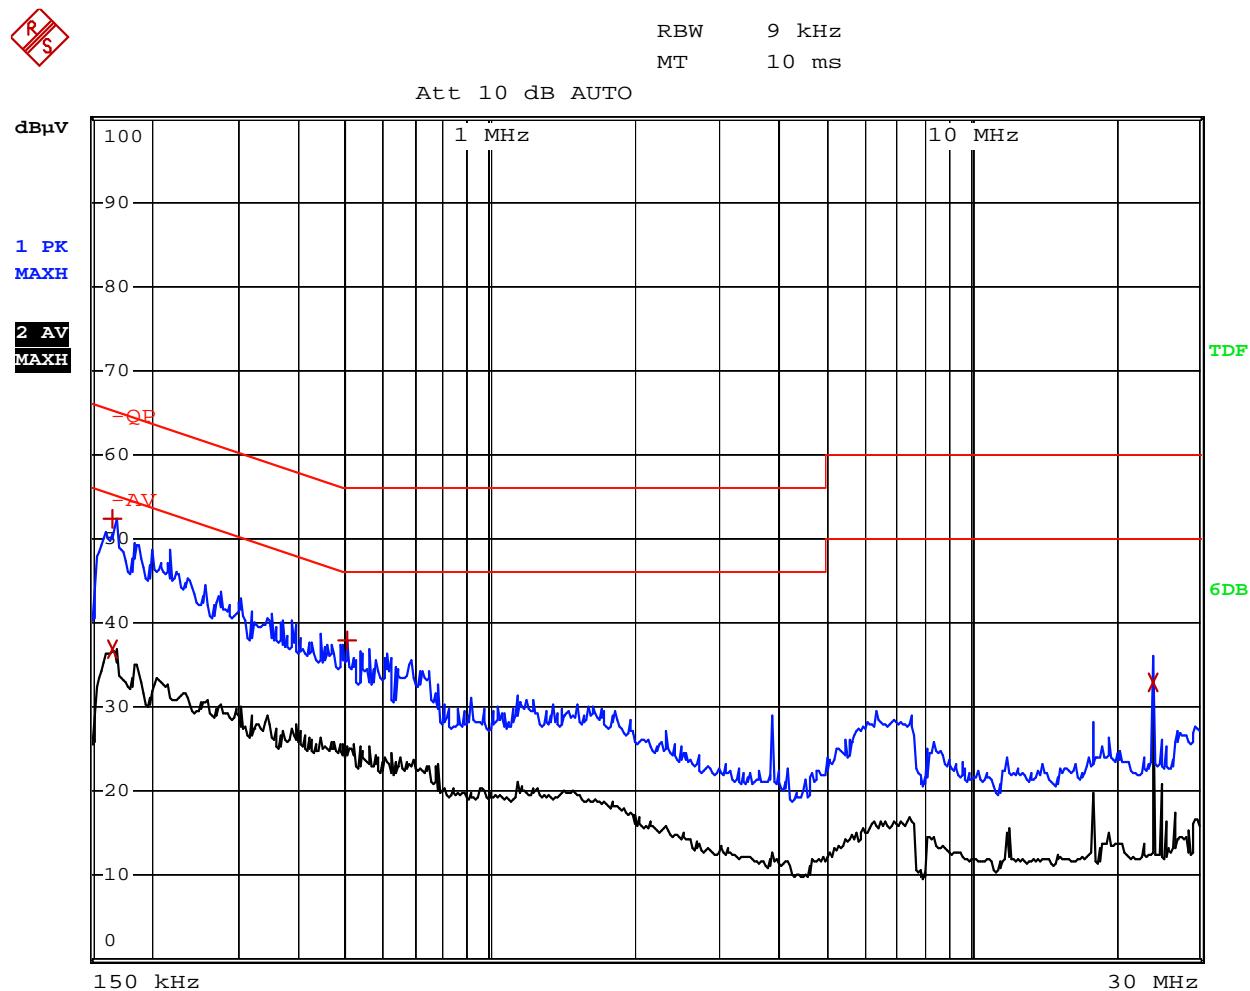

## 4. §15.109(a)- RADIATED EMISSION

### 4.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any radiation emissions measurement is  $\pm 5.10$  dB.

### 4.2 Test Equipment List and Details


Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2010-12-20	2011-12-19
EMI Test Receiver	R&S	ESVB	825471/005	2010-12-20	2011-12-19
Positioning Controller	C&C	CC-C-1F	N/A	2010-12-20	2011-12-19
RF Switch	EM	EMSW18	SW060023	2010-12-20	2011-12-19
Pre-amplifier	Agilent	8447F	3113A06717	2010-12-20	2011-12-19
Pre-amplifier	Compliance Direction	PAP-0118	24002	2010-12-20	2011-12-19
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2011-01-09	2012-01-08
Horn Antenna	ETS	3117	00086197	2011-01-09	2012-01-08

### 4.3 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.205 and FCC Part 15.109 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

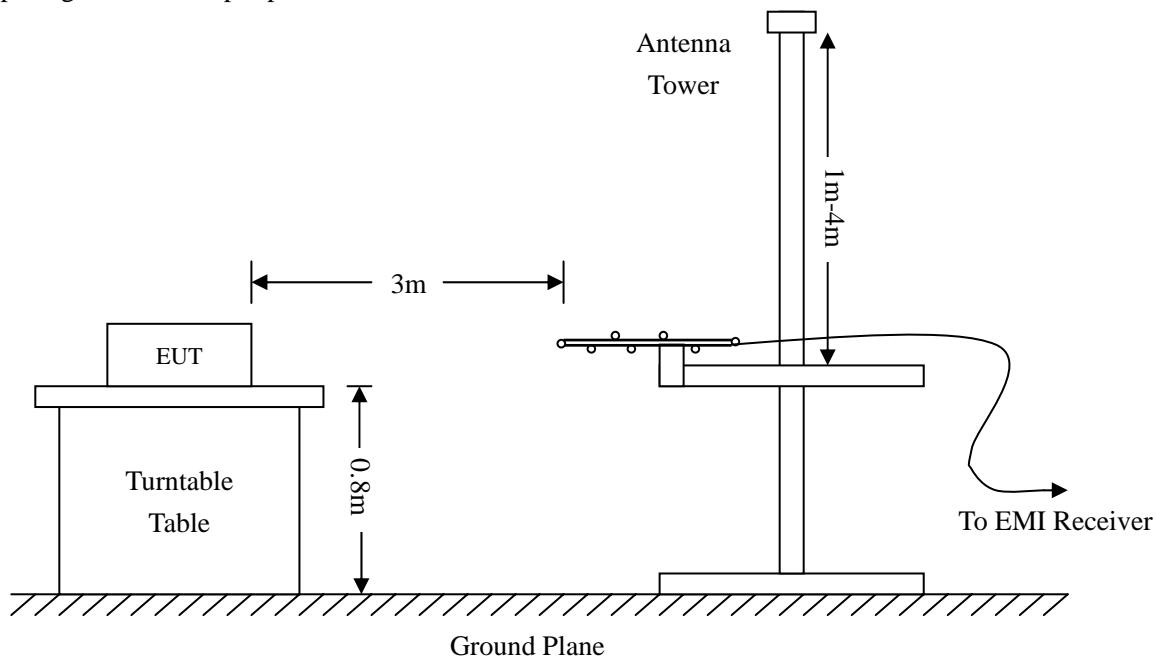

#### 4.4 Test Receiver Setup

During the radiated emission test, the test receiver was set with the following configurations:

Start Frequency ..... 30 MHz  
Stop Frequency..... 1000 MHz  
Sweep Speed ..... Auto  
IF Bandwidth..... 100 kHz  
Quasi-Peak Adapter Bandwidth ..... 120 kHz  
Quasi-Peak Adapter Mode ..... Normal

#### 4.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15B Limit}$$


#### 4.6 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

#### 4.7 Summary of Test Results/Plots


According to the data, the EUT complied with the FCC Part 15B Class B standards, and had the worst margin of:

**-8.34 dB $\mu$ V at 958.7943MHz in the Horizontal polarization, 30 MHz to 1 GHz, 3Meters**

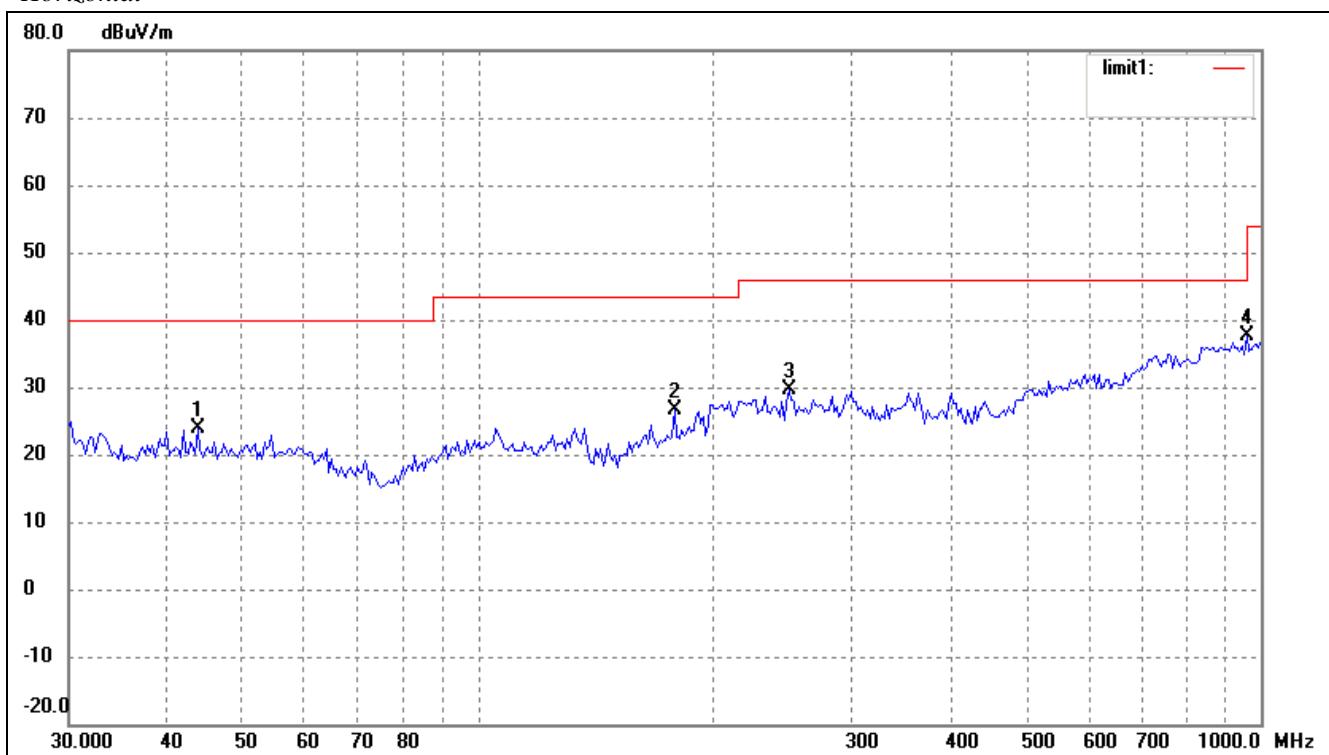**Plot of Radiation Emissions Test Data***Radiated Disturbance**EUT: WIRELESS MODULE**M/N: WMA1104**Operating Condition: Connect to PC**Test Specification: Horizontal & Vertical**Comment: AC 120V/60Hz USB 5V**Horizontal*

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( ° )	Height (cm)	Remark
1	43.8119	15.76	8.21	23.97	40.00	-16.03	360	100	peak
2	178.1327	21.07	5.50	26.57	43.50	-16.93	360	100	peak
3	249.4250	21.01	8.68	29.69	46.00	-16.31	360	100	peak
4	958.7943	15.68	21.98	37.66	46.00	-8.34	360	100	peak

Vertical

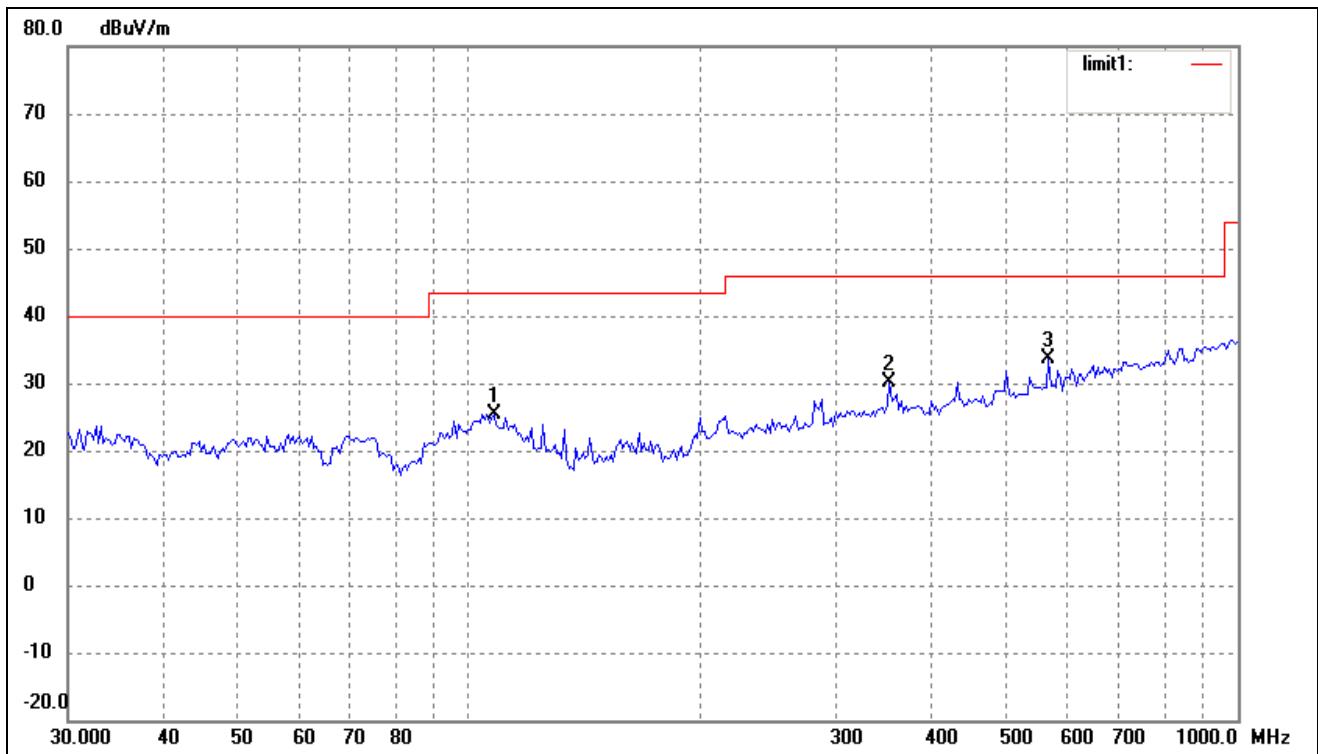

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( °)	Height (cm)	Remark
1	107.5101	17.60	7.80	25.40	43.50	-18.10	360	100	peak
2	351.7079	19.44	10.70	30.14	46.00	-15.86	360	100	peak
3	566.6223	17.73	15.91	33.64	46.00	-12.36	360	100	peak

\*\*\*\*\* END OF REPORT \*\*\*\*\*