




# FCC Test Report

**Equipment** : Lytro Light Field Camera  
**Brand Name** : Lytro  
**Model No.** : B5  
**FCC ID** : ZMQB5  
**Standard** : 47 CFR FCC Part 15.247  
**Operating Band** : 2400 MHz – 2483.5 MHz  
**FCC Classification** : DSS  
**Applicant** : Lytro, Inc.  
1300 Terra Bella Avenue,  
Mountain View, CA 94043 USA  
**Manufacturer** : Qisda Corporation  
157 Shan-Ying Road,  
Gueishan Taoyuan 333, Taiwan

The product sample received on Mar. 07, 2014 and completely tested on Mar. 17, 2014. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

  
Wayne Hsu / Assistant Manager





## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Accessories And Support Equipment.....	7
1.3	Testing Applied Standards .....	7
1.4	Testing Location Information .....	8
1.5	Measurement Uncertainty .....	9
<b>2</b>	<b>TEST CONFIGURATION OF EUT .....</b>	<b>10</b>
2.1	The Worst Case Modulation Configuration .....	10
2.2	Test Channel Frequencies Configuration.....	10
2.3	The Worst Case Power Setting Parameter .....	10
2.4	The Worst Case Measurement Configuration.....	11
2.5	Test Setup Diagram .....	12
<b>3</b>	<b>TRANSMITTER TEST RESULT .....</b>	<b>14</b>
3.1	AC Power-line Conducted Emissions .....	14
3.2	20dB Bandwidth and Carrier Frequency Separation .....	17
3.3	Number of Hopping Frequencies .....	19
3.4	Time of Occupancy (Dwell Time) .....	21
3.5	RF Output Power.....	23
3.6	Transmitter Radiated Bandedge Emissions.....	26
3.7	Transmitter Radiated Unwanted Emissions .....	29
<b>4</b>	<b>TEST EQUIPMENT AND CALIBRATION DATA .....</b>	<b>40</b>

### APPENDIX A. TEST PHOTOS

### APPENDIX B. PHOTOGRAPHS OF EUT



## Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]: 0.190387MHz 40.99 (Margin 13.03dB) - AV 51.08(Margin 12.94dB) - QP	FCC 15.207	Complied
3.2	15.247(a)	20dB Bandwidth	EDR: 1.2938 MHz	N/A	Complied
3.2	15.247(a)	Carrier Frequency Separation (ChS)	EDR: 1.0029MHz	ChS $\geq$ BW <sub>20dB</sub> x2/3.	Complied
3.3	15.247(a)	Number of Hopping Frequencies (N)	Max: 79 Min: 15	N $\geq$ 15	Complied
3.4	15.247(a)	Time of Occupancy (Dwell Time)	EDR: 0.311sec	0.4 s within 0.4 x N	Complied
3.5	15.247(b)	RF Output Power (Maximum Peak Conducted Output Power)	Power [dBm] BR: 9.81 EDR: 11.20	Power [dBm] BR:21 EDR:21	Complied
3.6	15.247(d)	Transmitter Radiated Bandedge Emissions	Restricted Bands [dBuV/m at 3m]: 2381.30MHz 58.15 (Margin 15.85dB) - PK 44.40 (Margin 9.60B) - AV	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied
3.7	15.247(d)	Transmitter Radiated Unwanted Emissions	Restricted Bands [dBuV/m at 3m]:272.5MHz 38.57 (Margin 7.43B) - PK	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied



## Revision History



## 1 General Description

### 1.1 Information

#### 1.1.1 RF General Information

RF General Information				
Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number	RF Output Power (dBm)
2400-2483.5	BR / EDR	2402-2480	0-78 [79]	11.2

Note 1: Bluetooth BR uses a GFSK (1Mbps).  
Note 2: Bluetooth EDR uses a combination of  $\pi/4$ -DQPSK (2Mbps) and 8DPSK (3Mbps).  
Note 3: RF output power specifies that Maximum Peak Conducted Output Power.  
Note 4: The WLAN and Bluetooth didn't transmit at same time.

#### 1.1.2 Antenna Information

Antenna Category	
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input checked="" type="checkbox"/>	Temporary RF connector provided
<input type="checkbox"/>	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.

Antenna General Information			
No.	Ant. Cat.	Ant. Type	Gain (dBi)
1	Integral	Chip	2.17



### 1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input checked="" type="checkbox"/> Production ; <input type="checkbox"/> Pre-Production ; <input type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/> Stand-alone	
<input type="checkbox"/> Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.:	
<input type="checkbox"/> Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.:	
<input type="checkbox"/> Other:	

### 1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
<input checked="" type="checkbox"/> Operated test mode for worst duty cycle	
<b>Test Signal Duty Cycle (x)</b>	<b>Power Duty Factor [dB] – (10 log 1/x)</b>
<input checked="" type="checkbox"/> 77.87% - test mode single channel-DH5	1.09

Bluetooth ACL packets can be 1, 3, or 5 time slots. The DH1 packet can cover a single time slot. The DH3 packet can cover up to 3 time slots. The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle.

### 1.1.5 EUT Operational Condition

Supply Voltage	<input type="checkbox"/> AC mains	<input checked="" type="checkbox"/> DC	<input checked="" type="checkbox"/> System
Type of DC Source	<input type="checkbox"/> Internal DC supply	<input checked="" type="checkbox"/> External DC from USB cable	<input checked="" type="checkbox"/> Battery



## 1.2 Accessories And Support Equipment

Accessories				
USB cable	Brand Name	MECIMEX	Model Name	customer provide
	Signal Line	0.6 meter, non-shielded cable, w/o ferrite core		
Battery	Brand Name	LYTRO	Model Name	A3
	Power Rating	3.7 Vdc, 3760 mAh		

Note: Regarding to more detail and other information, please refer to user manual.

Support Equipment - AC Conduction				
<b>Local</b>				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	DELL	E5530	DoC
<b>Remote</b>				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Bluetooth Station	R&S	CBT-32	N/A

Support Equipment - RF Conducted				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	ASUS	A53S	DoC

Support Equipment - Radiated Emission				
<b>Local</b>				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	DELL	E5530	DoC
<b>Remote</b>				
No.	Equipment	Brand Name	Model Name	FCC ID
1	Bluetooth Station	R&S	CBT-32	N/A

## 1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR FCC Part 15
- ANSI C63.10-2009
- FCC Public Notice DA 00-705
- FCC KDB 412172



## 1.4 Testing Location Information

Testing Location				
	Test Condition	Test Site No.	Test Engineer	Test Environment
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.		
	TEL : 886-3-327-3456	FAX : 886-3-327-0973		
	AC Conduction	CO04-HY	Zeus	21°C / 50%
	RF Conducted	TH06-HY	Wei	23°C / 64%
	Radiated Emission	03CH03-HY	Allen	21°C / 50%



## 1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty		
Test Item	Uncertainty	
AC power-line conducted emissions	±2.26 dB	
Emission bandwidth, 6dB bandwidth	±1.42 %	
RF output power, conducted	±0.63 dB	
Power density, conducted	±0.81 dB	
Unwanted emissions, conducted	9 – 150 kHz	±0.38 dB
	0.15 – 30 MHz	±0.42 dB
	30 – 1000 MHz	±0.51 dB
	1 – 18 GHz	±0.67 dB
	18 – 40 GHz	±0.83 dB
	40 – 200 GHz	N/A
All emissions, radiated	9 – 150 kHz	±2.49 dB
	0.15 – 30 MHz	±2.28 dB
	30 – 1000 MHz	±2.56 dB
	1 – 18 GHz	±3.59 dB
	18 – 40 GHz	±3.82 dB
	40 – 200 GHz	N/A
Temperature	±0.8 °C	
Humidity	±3 %	
DC and low frequency voltages	±3 %	
Time	±1.42 %	
Duty Cycle	±1.42 %	



## 2 Test Configuration of EUT

### 2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing					
Bluetooth Mode	Transmit Chains ( $N_{TX}$ )	Data Rate	Modulation Mode	RF Output Power (dBm)	Worst Mode
BR	1	1 Mbps	BR-1Mbps	9.81	EDR-3Mbps
EDR	1	2 Mbps	EDR-2Mbps	10.78	
EDR	1	3 Mbps	EDR-3Mbps	11.20	

Note 1: Bluetooth BR uses a combination of GFSK (1Mbps).  
Note 2: Bluetooth EDR uses a combination of  $\pi/4$ -DQPSK (2Mbps) and 8DPSK (3Mbps).  
Note 3: Modulation modes consist below configuration:  
    FHSS BR-1Mbps: GFSK (1Mbps), EDR-2Mbps:  $\pi/4$ -DQPSK (2Mbps), EDR-3Mbps: 8DPSK(3Mbps)  
Note 4: RF output power specifies that Maximum Peak Conducted Output Power.

### 2.2 Test Channel Frequencies Configuration

Test Channel Frequencies Configuration	
Bluetooth Mode	Test Channel Frequencies (MHz) – FX (Frequencies Abbreviations)
BR / EDR	2402-(F1), 2441-(F2), 2480-(F3)

### 2.3 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter			
Test Software Version	QRCT_3.0.25.0		
Modulation Mode	2402 MHz	2441 MHz	2480 MHz
BR,1Mbps	Default	Default	Default
EDR,2Mbps	Default	Default	Default
EDR,3Mbps	Default	Default	Default




## 2.4 The Worst Case Measurement Configuration



The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Operating Mode Description
1	EUT with Notebook via USB cable

The Worst Case Mode for Following Conformance Tests	
Tests Item	RF Output Power, 20dB Bandwidth, Carrier Frequency Separation (ChS) Number of Hopping Frequencies (N), Time of Occupancy (Dwell Time)
Test Condition	Conducted measurement at transmit chains
Modulation Mode	BR-1Mbps, EDR-3Mbps

The Worst Case Mode for Following Conformance Tests							
Tests Item	Transmitter Radiated Unwanted Emissions Transmitter Radiated Bandedge Emissions						
Test Condition	Radiated measurement						
User Position	<input type="checkbox"/> EUT will be placed in fixed position. <input type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. EUT shall be performed two orthogonal planes. <input checked="" type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed three orthogonal planes. The worst planes is Z.						
Operating Mode (Below 1GHz)	<input checked="" type="checkbox"/> 1. EUT with Notebook via USB cable <input checked="" type="checkbox"/> 2. Transmitter Mode Operating mode 1 was the worst case and it was recorded in this test report.						
Operating Mode (Above 1GHz)	<input checked="" type="checkbox"/> 2. Transmitter Mode						
Modulation Mode	BR-1Mbps, EDR-3Mbps						
Orthogonal Planes of EUT	<table border="1"><thead><tr><th>X Plane</th><th>Y Plane</th><th>Z Plane</th></tr></thead><tbody><tr><td></td><td></td><td></td></tr></tbody></table>	X Plane	Y Plane	Z Plane			
X Plane	Y Plane	Z Plane					

## 2.5 Test Setup Diagram

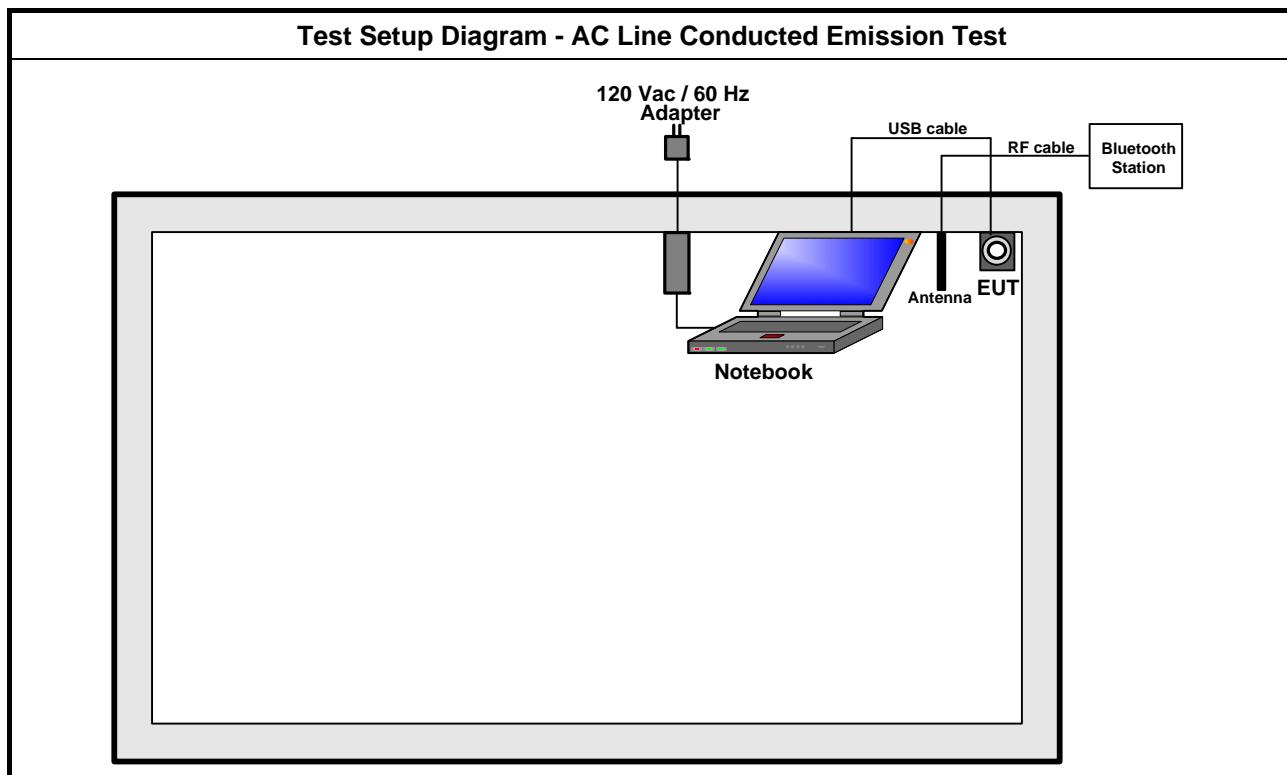

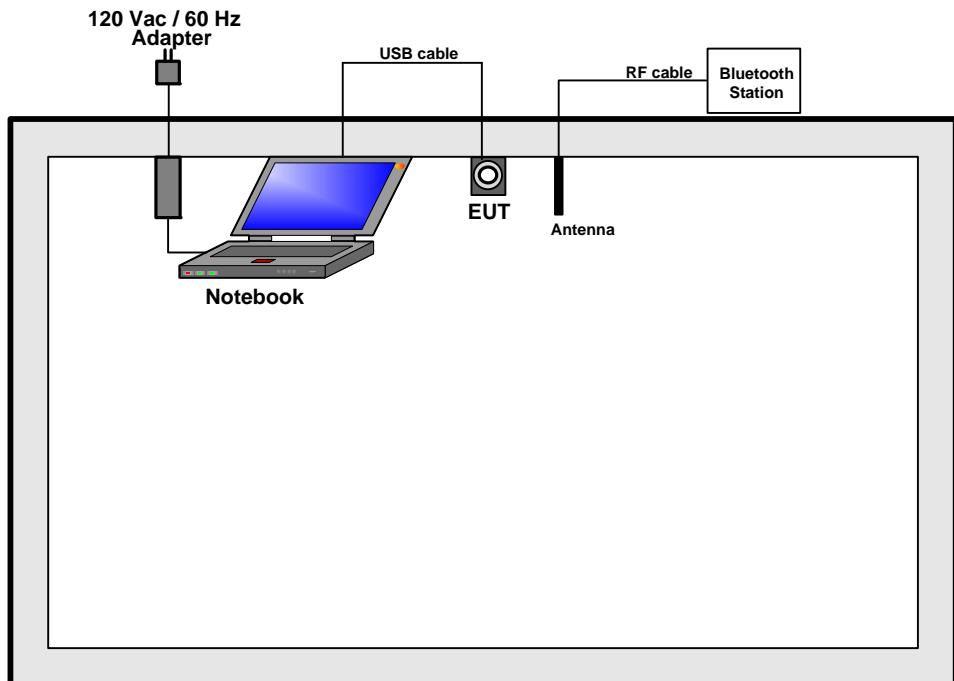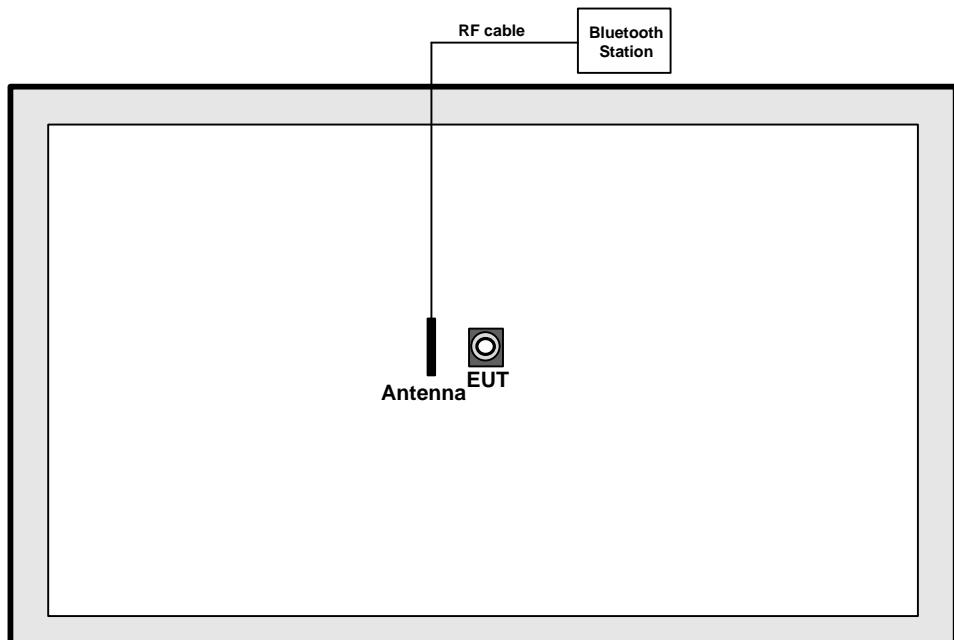**Test Setup Diagram - Radiated Mode 1 (Below 1GHz)****Test Setup Diagram - Radiated Mode 2 (Above 1GHz)**

### 3 Transmitter Test Result

#### 3.1 AC Power-line Conducted Emissions

##### 3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

##### 3.1.3 Test Procedures


Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.

##### 3.1.4 Test Setup

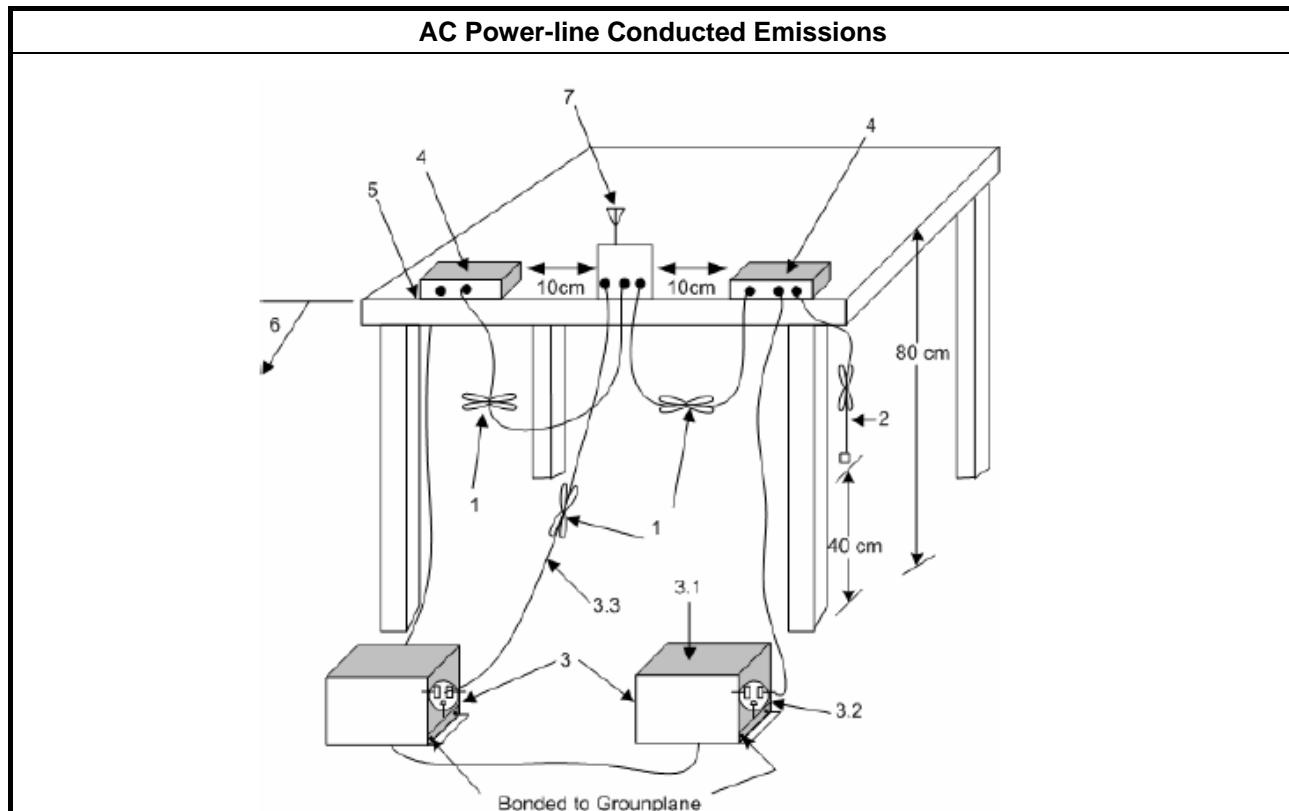




## 3.1.5 Test Result of AC Power-line Conducted Emissions

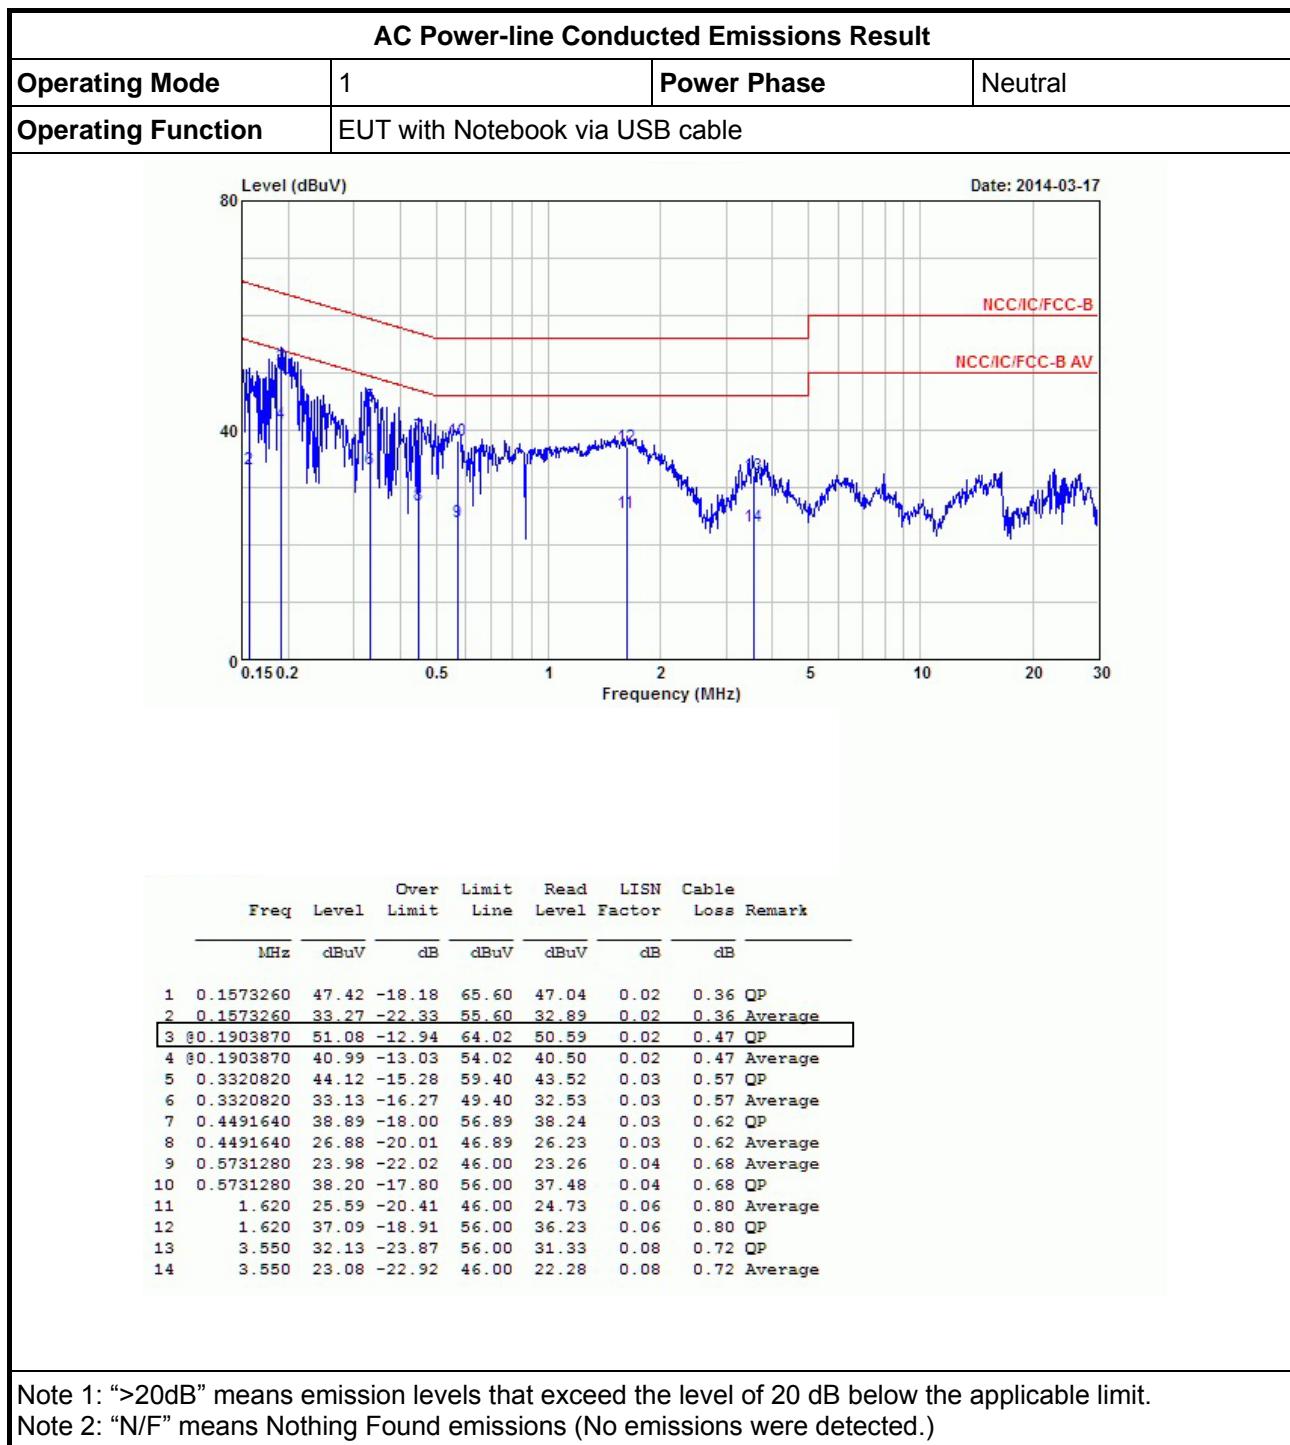



## AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	EUT with Notebook via USB cable		

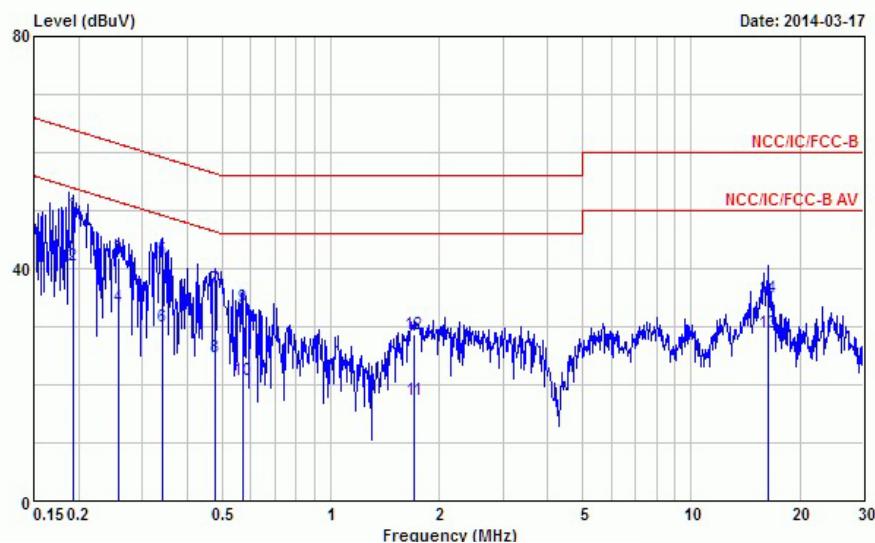

Freq	Level	Over	Limit	Read	LISN	Cable	Remark
		Limit	Line	Level	Factor	Loss	
MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1934380	49.50	-14.39	63.89	48.99	0.03	0.48 QP
2	0.1934380	40.61	-13.28	53.89	40.10	0.03	0.48 Average
3	0.2588790	41.90	-19.57	61.47	41.33	0.03	0.54 QP
4	0.2588790	33.42	-18.05	51.47	32.85	0.03	0.54 Average
5	0.3409970	41.51	-17.67	59.18	40.90	0.03	0.58 QP
6	0.3409970	30.06	-19.12	49.18	29.45	0.03	0.58 Average
7	0.4786490	36.54	-19.82	56.36	35.86	0.04	0.64 QP
8	0.4786490	24.66	-21.70	46.36	23.98	0.04	0.64 Average
9	0.5701000	33.30	-22.70	56.00	32.58	0.04	0.68 QP
10	0.5701000	20.83	-25.17	46.00	20.11	0.04	0.68 Average
11	1.710	17.50	-28.50	46.00	16.63	0.07	0.80 Average
12	1.710	28.57	-27.43	56.00	27.70	0.07	0.80 QP
13	16.400	28.97	-21.03	50.00	27.92	0.28	0.77 Average
14	16.400	35.00	-25.00	60.00	33.95	0.28	0.77 QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

## 3.2 20dB Bandwidth and Carrier Frequency Separation

### 3.2.1 20dB Bandwidth and Carrier Frequency Separation Limit

20dB Bandwidth and Carrier Frequency Separation Limit for Frequency Hopping Systems	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band:	
<input type="checkbox"/> N ≥ 75 and ChS ≥ MAX (20 dB bandwidth, 25 kHz).	
<input checked="" type="checkbox"/> N ≥ 15 and ChS ≥ MAX (20 dB bandwidth x 2/3, 25 kHz).	

N: Number of Hopping Frequencies; ChS: Hopping Channel Separation


### 3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.2.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.9.1 for 20 dB bandwidth measurement.	
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 7.7.2 for carrier frequency separation measurement.	
<input checked="" type="checkbox"/> For conducted measurement.	
<input checked="" type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.	
<input type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.	


### 3.2.4 Test Setup

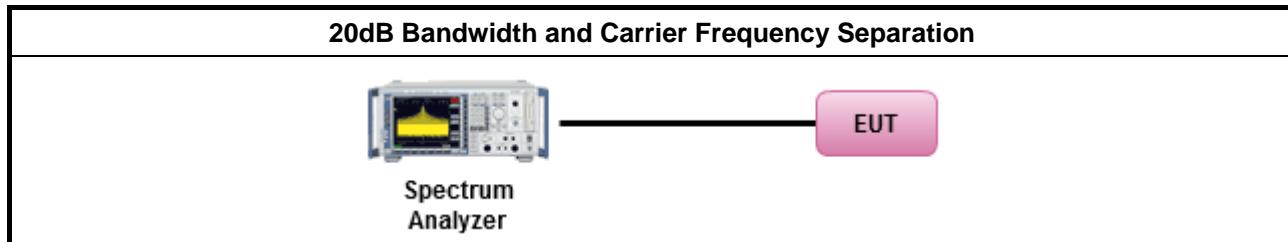



## 3.2.5 Test Result of 20dB Bandwidth and Carrier Frequency Separation

20dB Bandwidth and Carrier Frequency Separation Result					
Modulation Mode	Freq. (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)	Channel Separation (MHz)	Channel Separation Limits (MHz)
BR-1Mbps	2402	1.0289	0.9073	1.0029	0.686
BR-1Mbps	2441	0.9942	0.9073	1.0029	0.663
BR-1Mbps	2480	0.9986	0.9073	1.0029	0.666
EDR-3Mbps	2402	1.2938	1.1722	1.0029	0.863
EDR-3Mbps	2441	1.2938	1.1722	1.0029	0.863
EDR-3Mbps	2480	1.2590	1.1591	1.0029	0.839
<b>Result</b>			<b>Complied</b>		

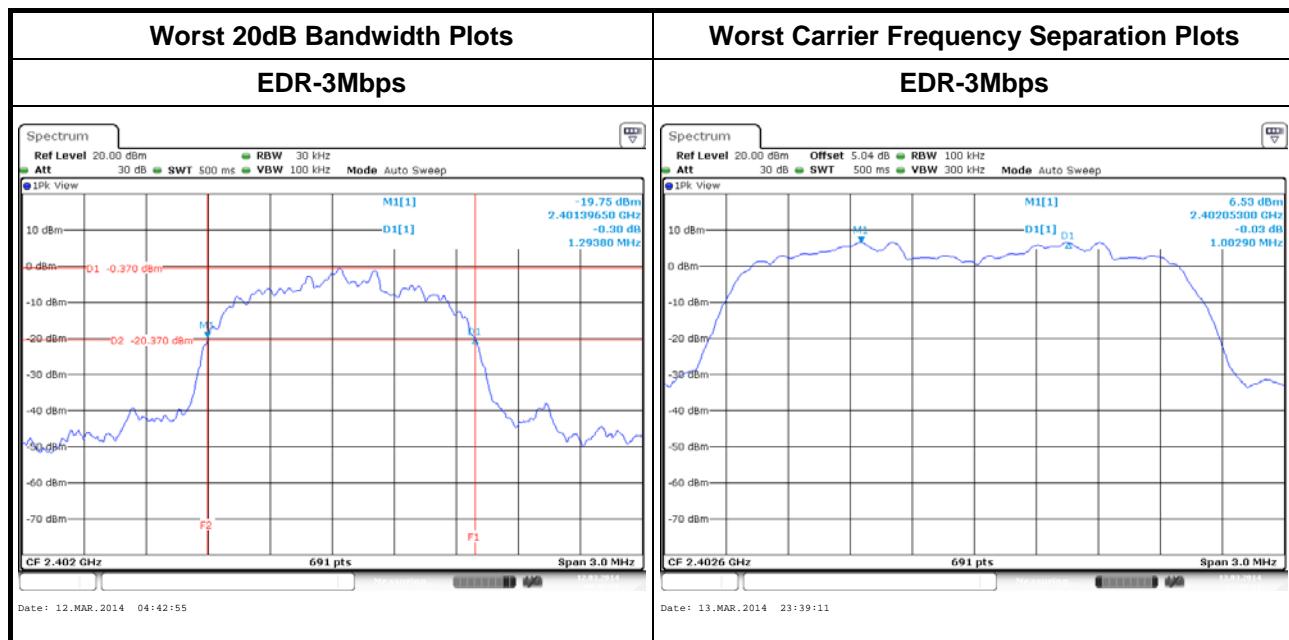

### 3.3 Number of Hopping Frequencies

#### 3.3.1 Number of Hopping Frequencies Limit

Number of Hopping Frequencies Limit for Frequency Hopping Systems	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band:	
<input type="checkbox"/> N ≥ 75 and ChS ≥ MAX (20 dB bandwidth, 25 kHz).	
<input checked="" type="checkbox"/> N ≥ 15 and ChS ≥ MAX (20 dB bandwidth x 2/3, 25 kHz).	

N: Number of Hopping Frequencies; ChS: Hopping Channel Separation


#### 3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.3.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 7.7.3 for number of hopping frequencies measurement.
<input checked="" type="checkbox"/> For conducted measurement.
<input checked="" type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.
<input type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.


#### 3.3.4 Test Setup

Number of Hopping Frequencies
 Spectrum Analyzer ————— EUT



## 3.3.5 Test Result of Number of Hopping Frequencies

Number of Hopping Frequencies Result			
Modulation Mode	Freq. (MHz)	Hopping Channel Number (N)	Hopping Channel Number Limits
EDR-3Mbps	2402-2480	79	15
Result	Complied		

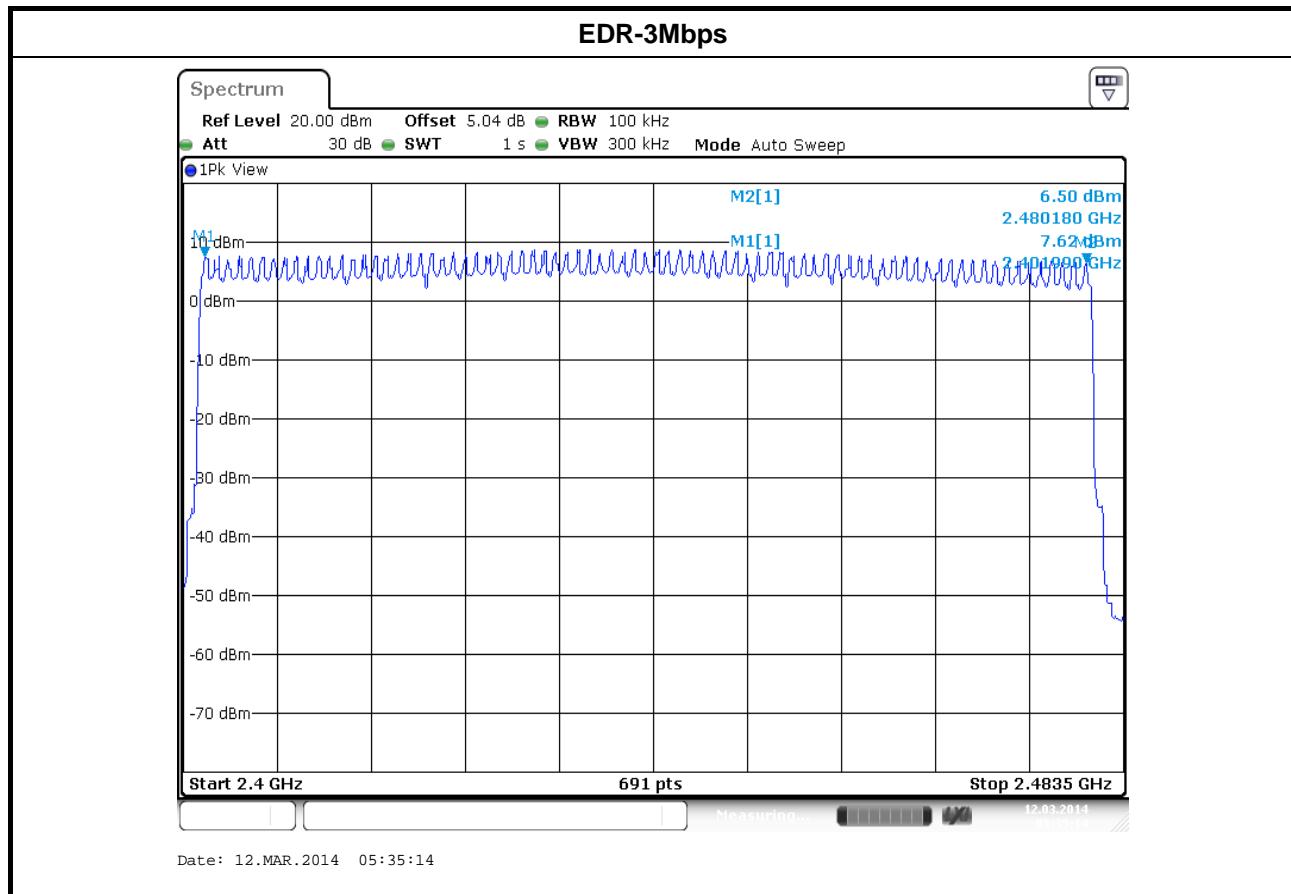

### 3.4 Time of Occupancy (Dwell Time)

#### 3.4.1 Time of Occupancy (Dwell Time) Limit

Time of Occupancy (Dwell Time) Limit for Frequency Hopping Systems	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band: Dwell time $\leq$ 0.4 second within $0.4 \times N$	
<b>N:</b> Number of Hopping Frequencies	


#### 3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.4.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 7.7.4 for dwell time measurement.	
<input checked="" type="checkbox"/> Bluetooth ACL packets can be 1, 3, or 5 time slots. Following as dwell time. Operate DH5 at maximum dwell time and maximum duty cycle.	
<input checked="" type="checkbox"/> The DH1 packet can cover a single time slot. A maximum length packet has duration of 1 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is $1/1600$ seconds, or 0.625ms. DH1 Packet permit maximum $1600 / 79 / 2 = 10.12$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds.	
<input checked="" type="checkbox"/> The DH3 packet can cover up to 3 time slots. A maximum length packet has duration of 3 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is $3/1600$ seconds, or 1.875ms. DH3 Packet permit maximum $1600 / 79 / 4 = 5.06$ hops per second in each channel (3 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds.	
<input checked="" type="checkbox"/> The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle. A maximum length packet has duration of 5 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is $5/1600$ seconds, or 3.125ms. DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds	
<input checked="" type="checkbox"/> For conducted measurement.	
<input checked="" type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.	
<input type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.	


#### 3.4.4 Test Setup

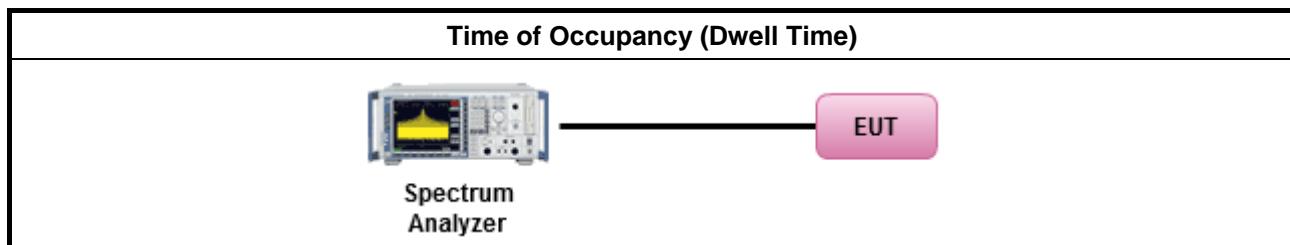

### 3.4.5 Test Result of Time of Occupancy (Dwell Time)

Time of Occupancy (Dwell Time) Result					
Modulation Mode	Freq. (MHz)	Pulse Time per Hop (ms)	Number of Pulse in [0.4 x N sec]	Dwell Time in [0.4 x N sec] (s)	Dwell Time Limits (s)
BR-1Mbps	2442	2.92	106.7	0.311	0.4
EDR-3Mbps	2442	2.92	106.7	0.311	0.4
<b>Result</b>		<b>Complied</b>			

Bluetooth ACL packets can be 1, 3, or 5 time slots. The DH1 packet can cover a single time slot. The DH3 packet can cover up to 3 time slots. The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle. A maximum length packet has duration of 5 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 5/1600 seconds, or 3.125ms.

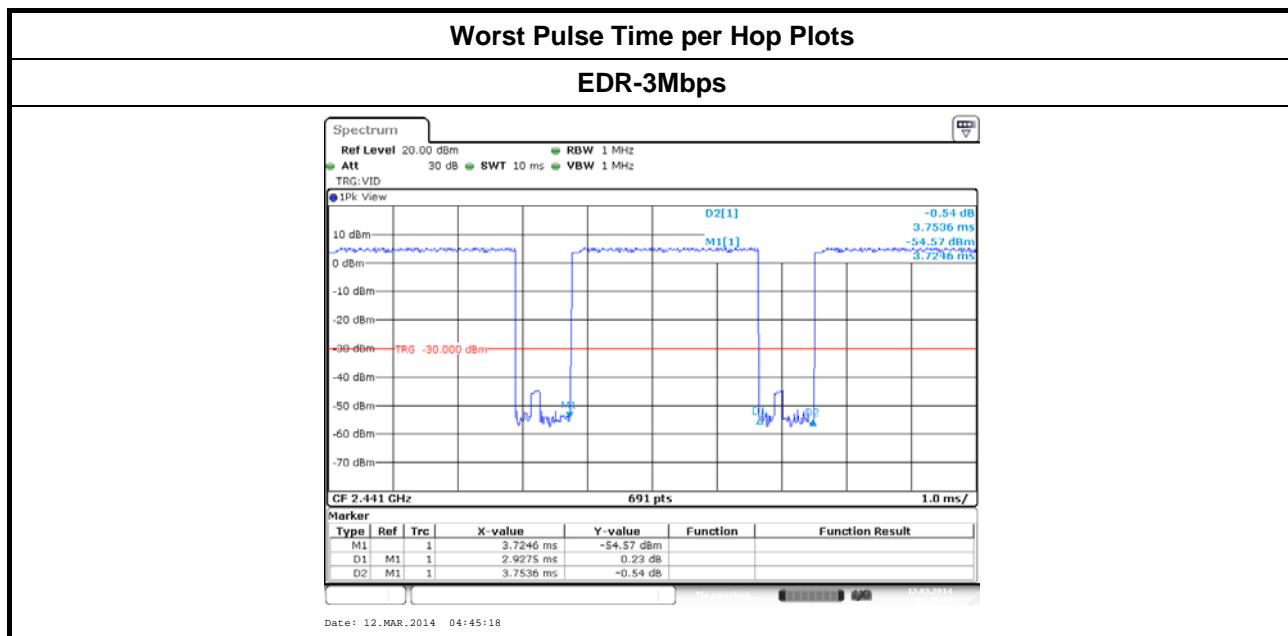



## 3.5 RF Output Power

### 3.5.1 RF Output Power Limit


RF Output Power Limit for Frequency Hopping Systems	
<b>Maximum Peak Conducted Output Power Limit</b>	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band:	
<input type="checkbox"/> For Hopping Channel: $N \geq 75$	
	<input type="checkbox"/> If $G_{TX} \leq 6 \text{ dBi}$ , then $P_{out} \leq 30 \text{ dBm (1 W)}$
	<input type="checkbox"/> If $G_{TX} > 6 \text{ dBi}$ , then $P_{out} = 30 - (G_{TX} - 6) \text{ dBm}$
<input checked="" type="checkbox"/> For Hopping Channel: $N \geq 15$	
	<input checked="" type="checkbox"/> If $G_{TX} \leq 6 \text{ dBi}$ , then $P_{out} \leq 21 \text{ dBm (0.125 W)}$
	<input type="checkbox"/> If $G_{TX} > 6 \text{ dBi}$ , then $P_{out} = 21 - (G_{TX} - 6) \text{ dBm}$
<b>e.i.r.p. Power Limit:</b>	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band:	
	<input type="checkbox"/> For Hopping Channel: $N \geq 75 - P_{eirp} \leq 36 \text{ dBm (4 W)}$
	<input checked="" type="checkbox"/> For Hopping Channel: $N \geq 15 - P_{eirp} \leq 27 \text{ dBm (0.5 W)}$
$G_{TX}$ = the maximum transmitting antenna directional gain in dBi. $P_{eirp}$ = e.i.r.p. Power in dBm. N: Number of Hopping Frequencies ChS: Hopping Channel Separation	

### 3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.5.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/> Maximum Peak Conducted Output Power	
	<input type="checkbox"/> Refer as FCC DA 00-0705, spectrum analyzer for peak power.
	<input checked="" type="checkbox"/> Refer as FCC DA 00-0705, peak power meter for peak power.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 6.10.2.1 a) for peak power meter.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 6.10.2.1 a) for spectrum analyzer - (RBW $\geq$ EBW).
<input checked="" type="checkbox"/> For conducted measurement.	
	<input checked="" type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.
	<input type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.

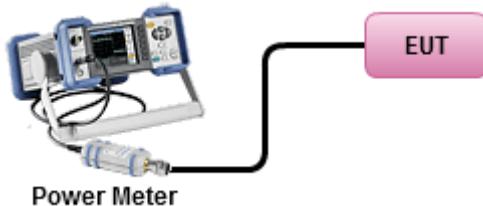**3.5.4 Test Setup****RF Output Power (Peak Power Meter)**



### 3.5.5 Test Result of Maximum Peak Conducted Output Power


Maximum Peak Conducted Output Power Result						
Condition		RF Output Power (dBm)				
Modulation Mode	Freq. (MHz)	RF Output Power	Power Limit	Antenna Gain (dBi)	EIRP Power	EIRP Limit
BR-1Mbps	2402	8.78	21	2.17	10.95	27
BR-1Mbps	2441	9.81	21	2.17	11.98	27
BR-1Mbps	2480	7.64	21	2.17	9.81	27
EDR-3Mbps	2402	10.15	21	2.17	12.32	27
EDR-3Mbps	2441	11.2	21	2.17	13.37	27
EDR-3Mbps	2480	9.01	21	2.17	11.18	27
Result		Complied				

### 3.5.6 Test Result of Maximum Average Conducted Output Power

Maximum Average Conducted Output Power Result						
Condition		RF Output Power (dBm)				
Modulation Mode	Freq. (MHz)	Average Power	Duty Factor (dB)	RF Output Power	Antenna Gain (dBi)	EIRP Power
BR-1Mbps	2402	7.52	1.09	8.61	2.17	10.78
BR-1Mbps	2441	8.53	1.09	9.62	2.17	11.79
BR-1Mbps	2480	6.37	1.09	7.46	2.17	9.63
EDR-3Mbps	2402	6.06	1.09	7.15	2.17	9.32
EDR-3Mbps	2441	7.08	1.09	8.17	2.17	10.34
EDR-3Mbps	2480	4.92	1.09	6.01	2.17	8.18
Result		Complied				

## 3.6 Transmitter Radiated Bandedge Emissions

### 3.6.1 Transmitter Radiated Bandedge Emissions Limit

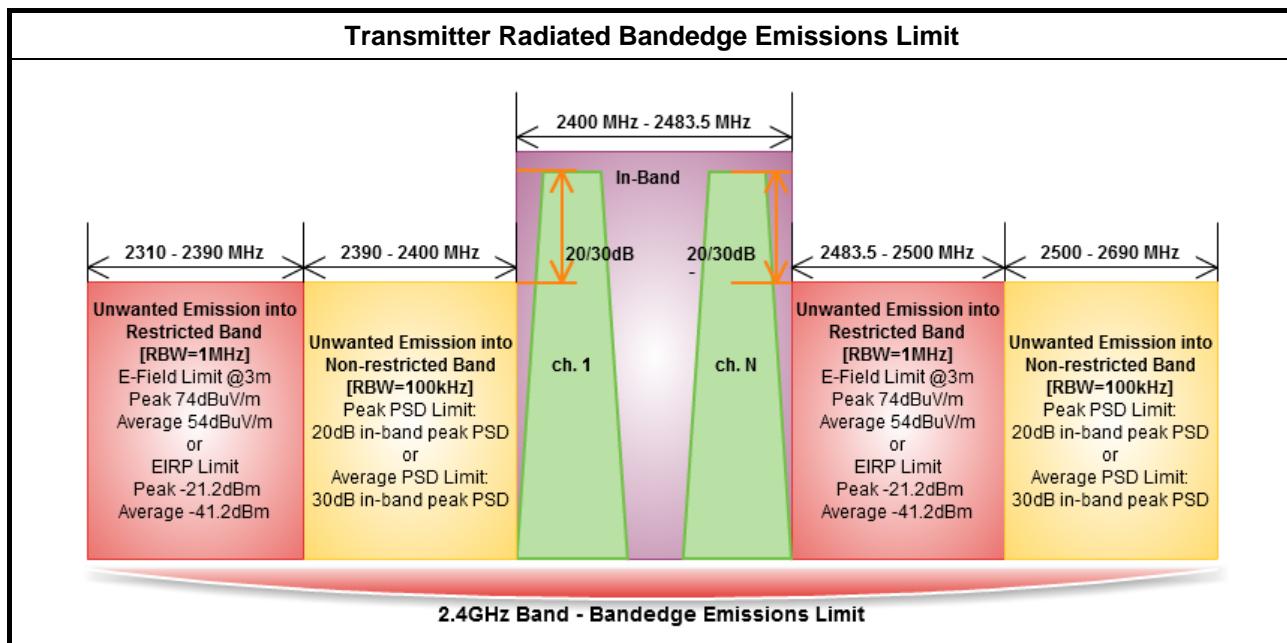

### 3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

### 3.6.3 Test Procedures

<b>Test Method – General Information</b>				
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].			
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.			
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:			
<input checked="" type="checkbox"/> For unwanted emissions into non-restricted bands. Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.				
<input checked="" type="checkbox"/> For unwanted emissions into restricted bands.				
<table border="1" style="width: 100%;"> <tr> <td><input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). <math>VBW \geq 1/T</math>, where T is pulse time.</td></tr> <tr> <td><input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.</td></tr> <tr> <td><input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.</td></tr> </table>		<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). $VBW \geq 1/T$ , where T is pulse time.	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). $VBW \geq 1/T$ , where T is pulse time.				
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.				
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.				
<input checked="" type="checkbox"/> For the transmitter bandedge emissions shall be measured using following options below:				
<table border="1" style="width: 100%;"> <tr> <td><input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.9.2 for band-edge testing.</td></tr> <tr> <td><input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.</td></tr> <tr> <td><input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 7.7.9 for band-edge testing into non-restricted bands.</td></tr> </table>		<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.9.2 for band-edge testing.	<input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 7.7.9 for band-edge testing into non-restricted bands.
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.9.2 for band-edge testing.				
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.				
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 7.7.9 for band-edge testing into non-restricted bands.				
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.6 for radiated emissions and test distance is 3m.				

### 3.6.4 Test Setup

#### Transmitter Radiated Bandedge Emissions

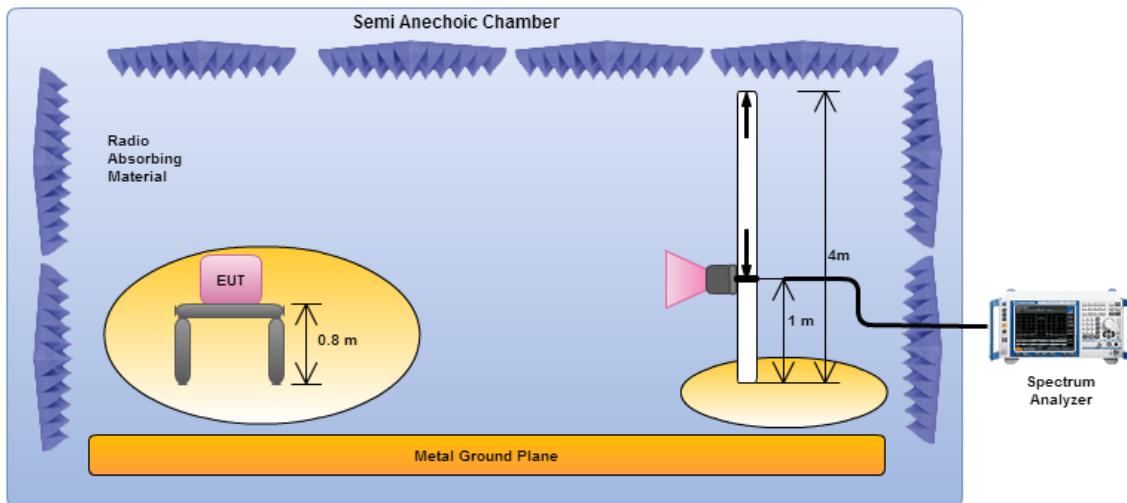

Electric field tests shall be performed in transmitter bandedge emissions using a calibrated horn antenna.



## 3.6.5 Test Result of Transmitter Radiated Bandedge Emissions

Transmitter Radiated Bandedge Emissions (Non-restricted Band)								
Modulation	N <sub>TX</sub>	Test Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Pol.
BR-1Mbps	1	2402	100.74	2391.09	61.53	39.21	20	H
BR -1Mbps	1	2480	101.65	2529.20	62.30	39.35	20	H
EDR-2Mbps	1	2402	99.86	2399.66	61.46	38.40	20	H
EDR-2Mbps	1	2480	101.10	2512.80	62.54	38.56	20	H
EDR-3Mbps	1	2402	99.55	2397.920	61.77	37.78	20	H
EDR-3Mbps	1	2480	101.00	2503.60	62.39	38.61	20	H

Note 1: Measurement worst emissions of receive antenna polarization

Transmitter Radiated Bandedge Emissions (Restricted Band)										
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	Measure Distance (m)	Freq. (MHz) PK	Level (dBuV/m) PK	Limit (dBuV/m) PK	Freq. (MHz) AV	Level (dBuV/m) AV	Limit (dBuV/m) AV	Pol.
BR-1Mbps	1	2402	3	2364.16	58.15	74	2381.30	44.40	54	H
BR -1Mbps	1	2480	3	2483.50	63.11	74	2483.50	30.13	54	H
EDR-2Mbps	1	2402	3	2375.89	58.19	74	2380.89	44.37	54	H
EDR-2Mbps	1	2480	3	2483.50	63.47	74	2483.50	31.22	54	H
EDR-3Mbps	1	2402	3	2375.99	58.42	74	2380.79	44.37	54	H
EDR-3Mbps	1	2480	3	2483.50	63.93	74	2483.50	31.82	54	H

Note 1: Measurement worst emissions of receive antenna polarization.

Note 2: Average emission setting: RBW=1MHz; VBW  $\geq$  1/T, where T is "Pulse On Time", e.g., DH5 VBW  $\geq$  1/3.125ms, VBW=1kHz



### 3.7 Transmitter Radiated Unwanted Emissions

#### 3.7.1 Transmitter Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

#### 3.7.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.




### 3.7.3 Test Procedures

Test Method – General Information	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input checked="" type="checkbox"/>	Measurements in the frequency range 10 GHz - 18GHz are typically made at a closer distance 1m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	Measurements in the frequency range above 18 GHz - 25GHz are typically made at a closer distance 0.5m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC DA 00-0705, for spurious radiated emissions. The dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from $20\log(\text{dwell time}/100 \text{ ms})$
<input checked="" type="checkbox"/>	For unwanted emissions into non-restricted bands. Peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.
<input checked="" type="checkbox"/>	For unwanted emissions into restricted bands.
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). $\text{VBW} \geq 1/T$ , where T is pulse time.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For radiated measurement.
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1 GHz and test distance is 3m.

### 3.7.4 Test Setup

#### Transmitter Radiated Unwanted Emissions

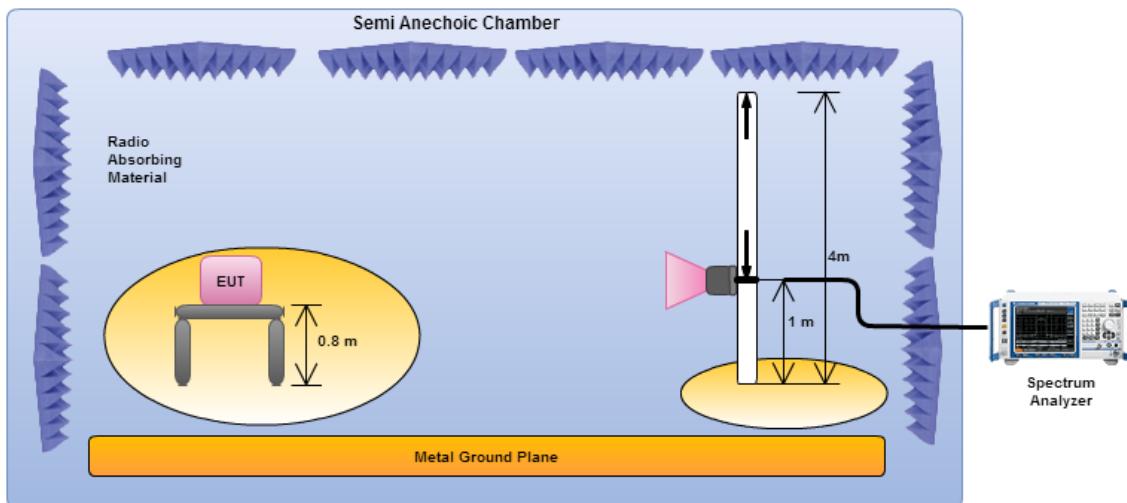

Magnetic field tests shall be performed in the frequency range of 9 kHz to 30 MHz using a calibrated loop antenna. Electric field tests shall be performed in the frequency range of 30 MHz to 1000 MHz using a calibrated bi-log antenna and the frequency range of 1 GHz to 40 GHz using a calibrated horn antenna.


### 3.7.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.



## 3.7.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)


## Transmitter Radiated Unwanted Emissions (Below 1GHz)

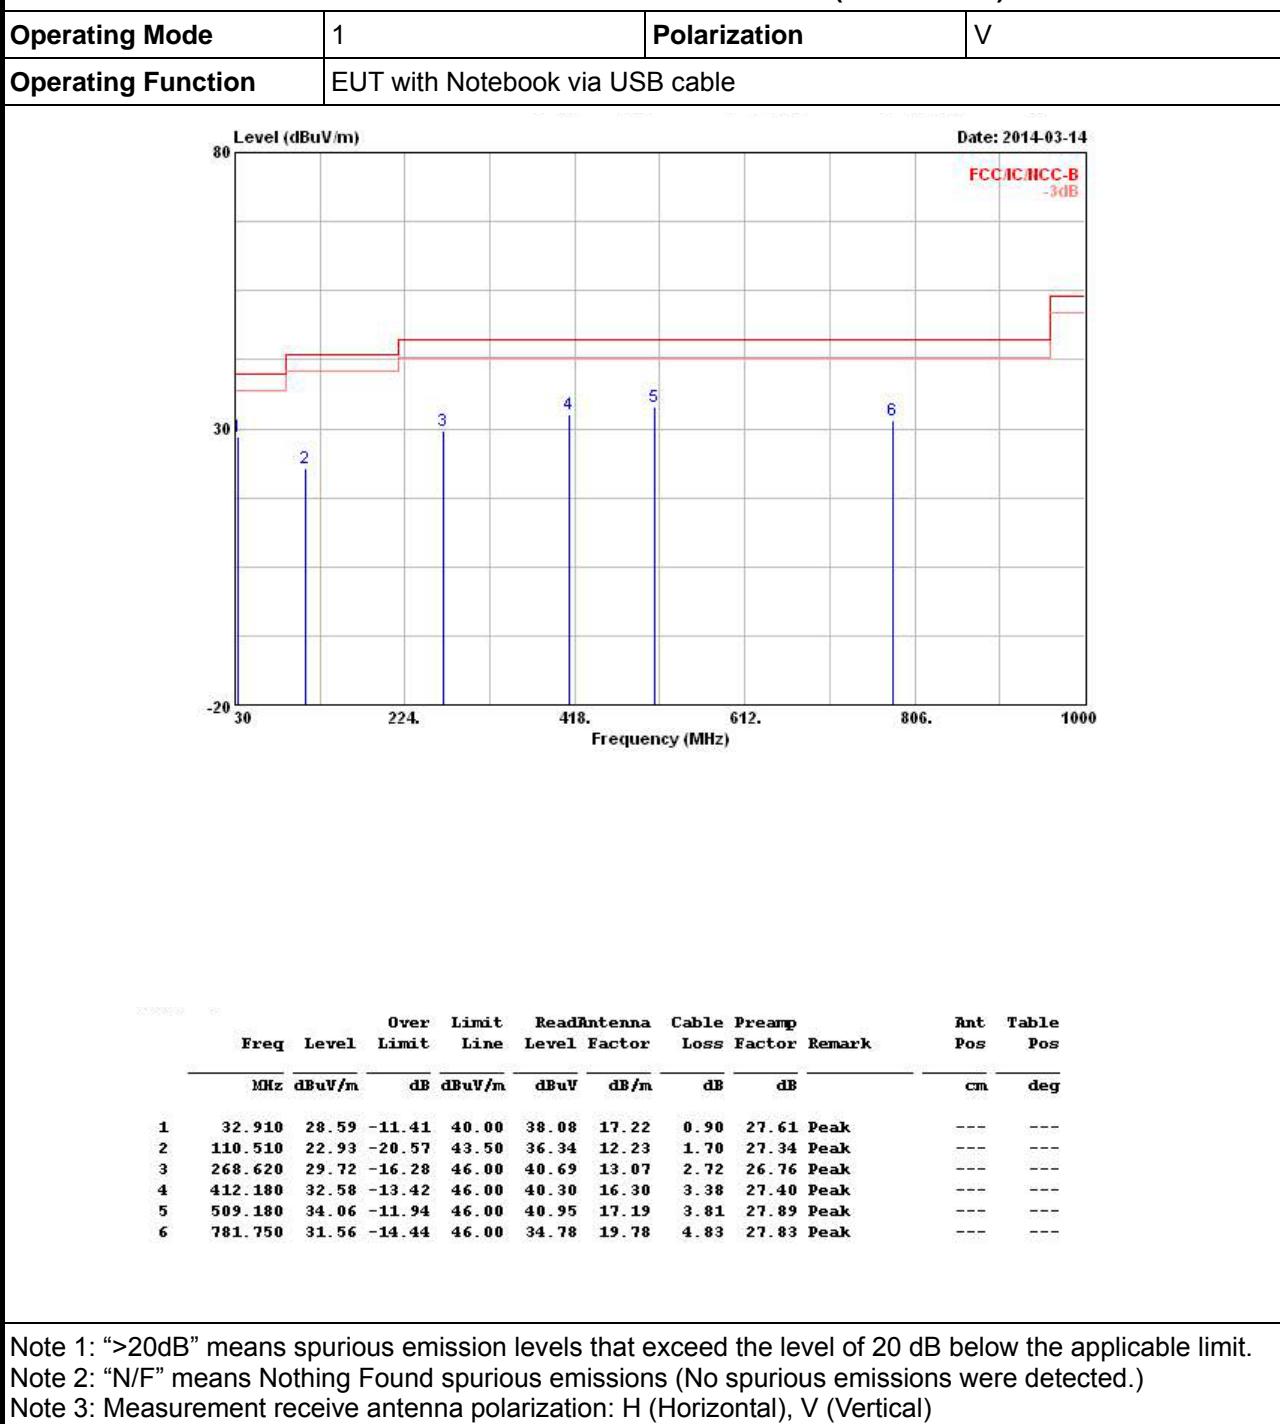



### Transmitter Radiated Unwanted Emissions (Below 1GHz)

<b>Operating Mode</b>	1	<b>Polarization</b>	H
<b>Operating Function</b>	EUT with Notebook via USB cable		

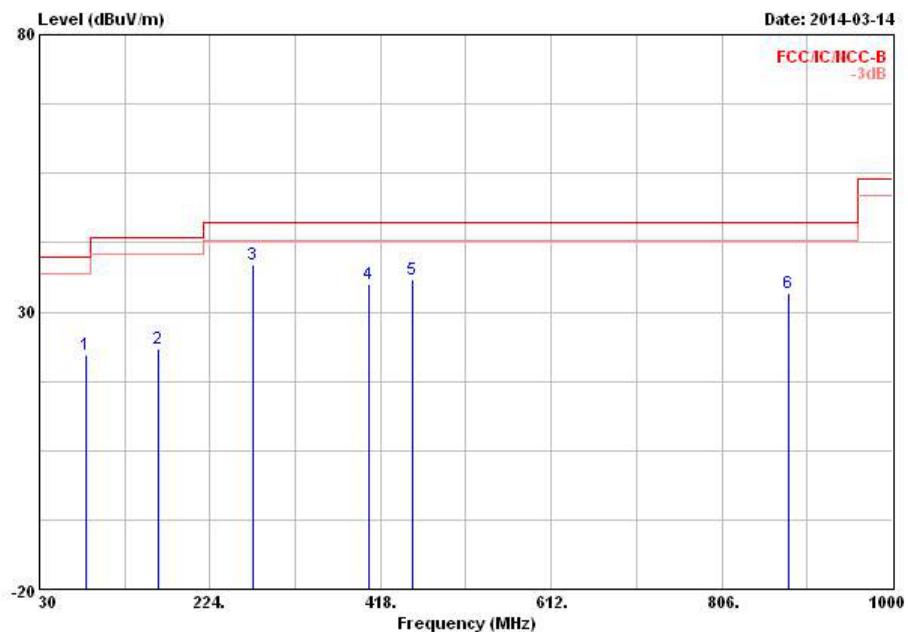

Freq	Level	Over Limit		ReadAntenna		Cable Preamp		Remark	Ant Pos	Table Pos
		Limit	Line	Level	Factor	Loss	Factor			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 82.380	22.24	-17.76	40.00	40.66	7.56	1.47	27.45	Peak	---	---
2 164.830	23.29	-20.21	43.50	38.38	9.92	2.12	27.13	Peak	---	---
3 @ 272.500	38.57	-7.43	46.00	49.64	12.94	2.74	26.75	Peak	---	---
4 405.390	34.94	-11.06	46.00	42.97	15.98	3.36	27.37	Peak	---	---
5 @ 454.860	35.83	-10.17	46.00	43.33	16.60	3.53	27.63	Peak	---	---
6 882.630	33.39	-12.61	46.00	35.47	20.41	5.10	27.59	Peak	---	---


Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)




## 3.7.7 Transmitter Radiated Unwanted Emissions (Above 1GHz)

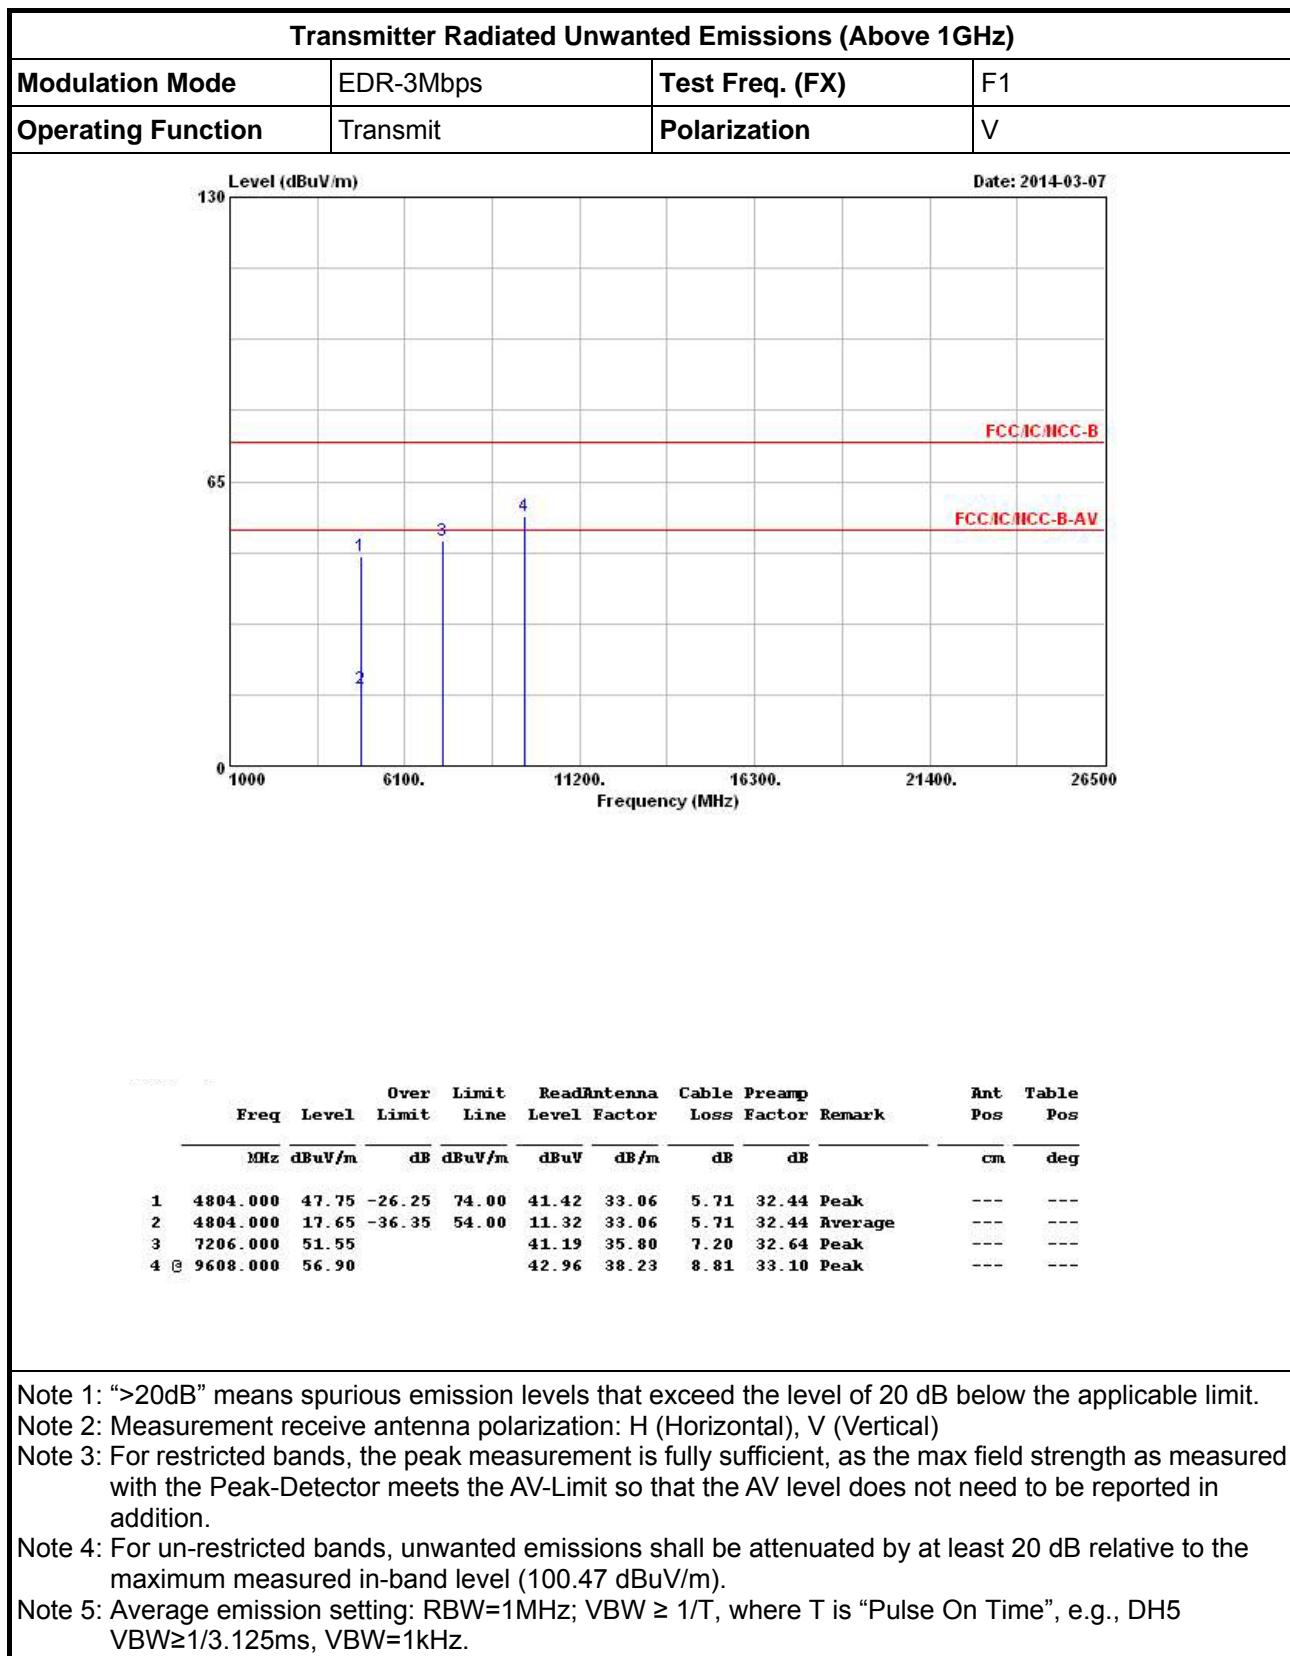

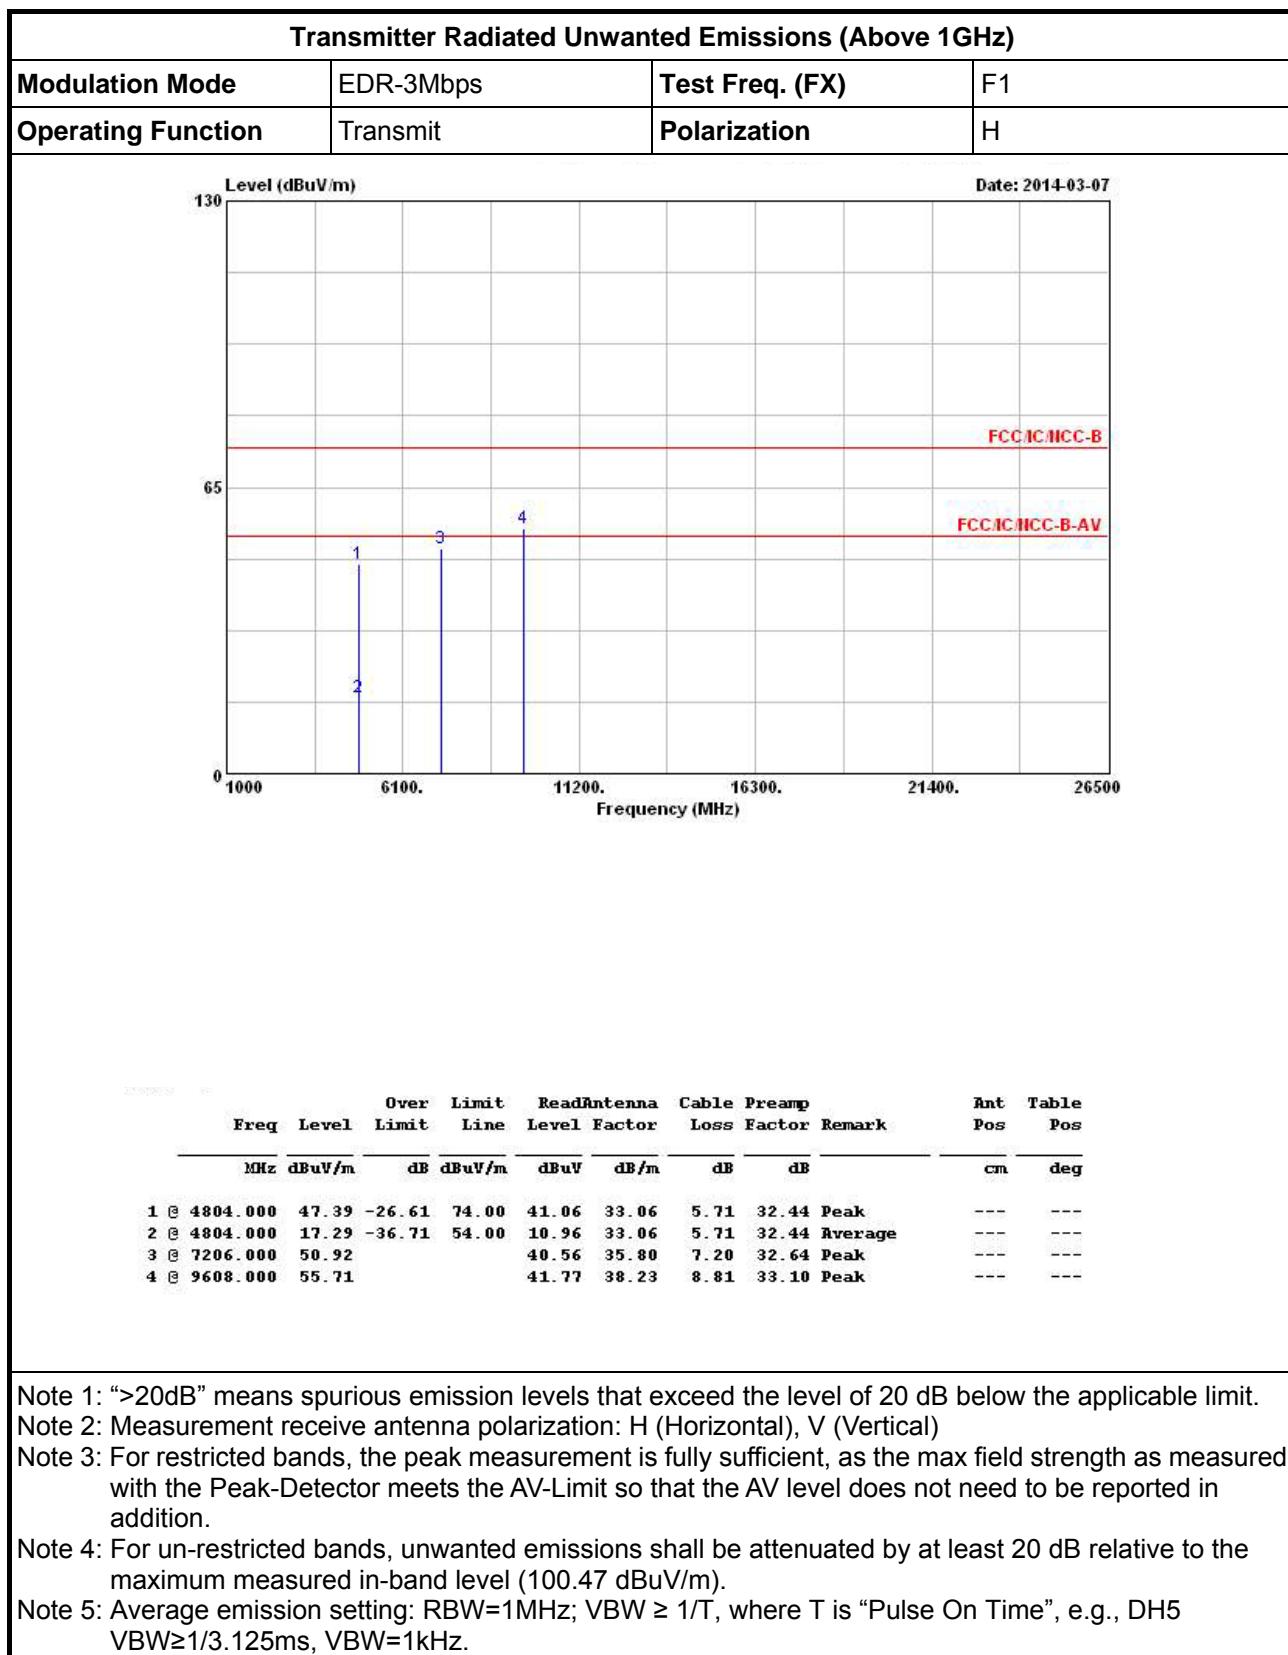

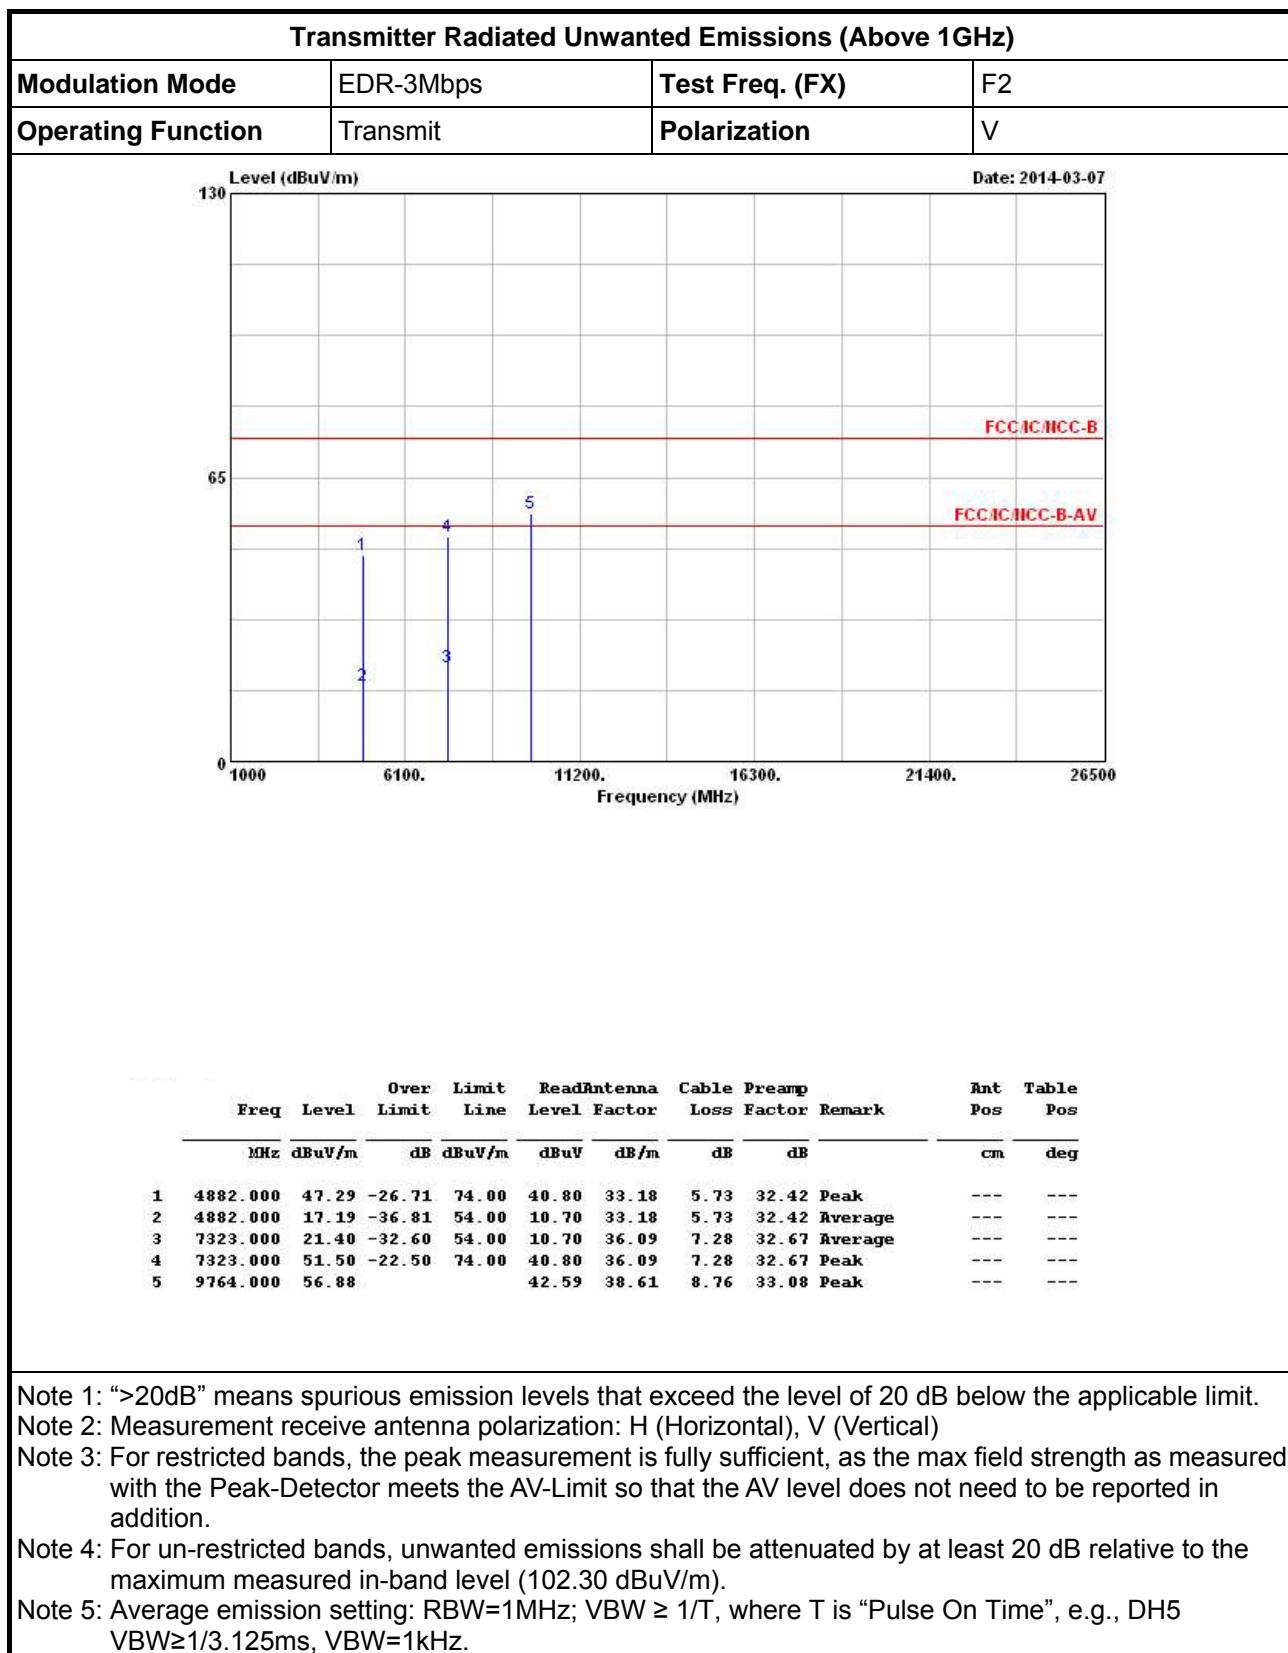


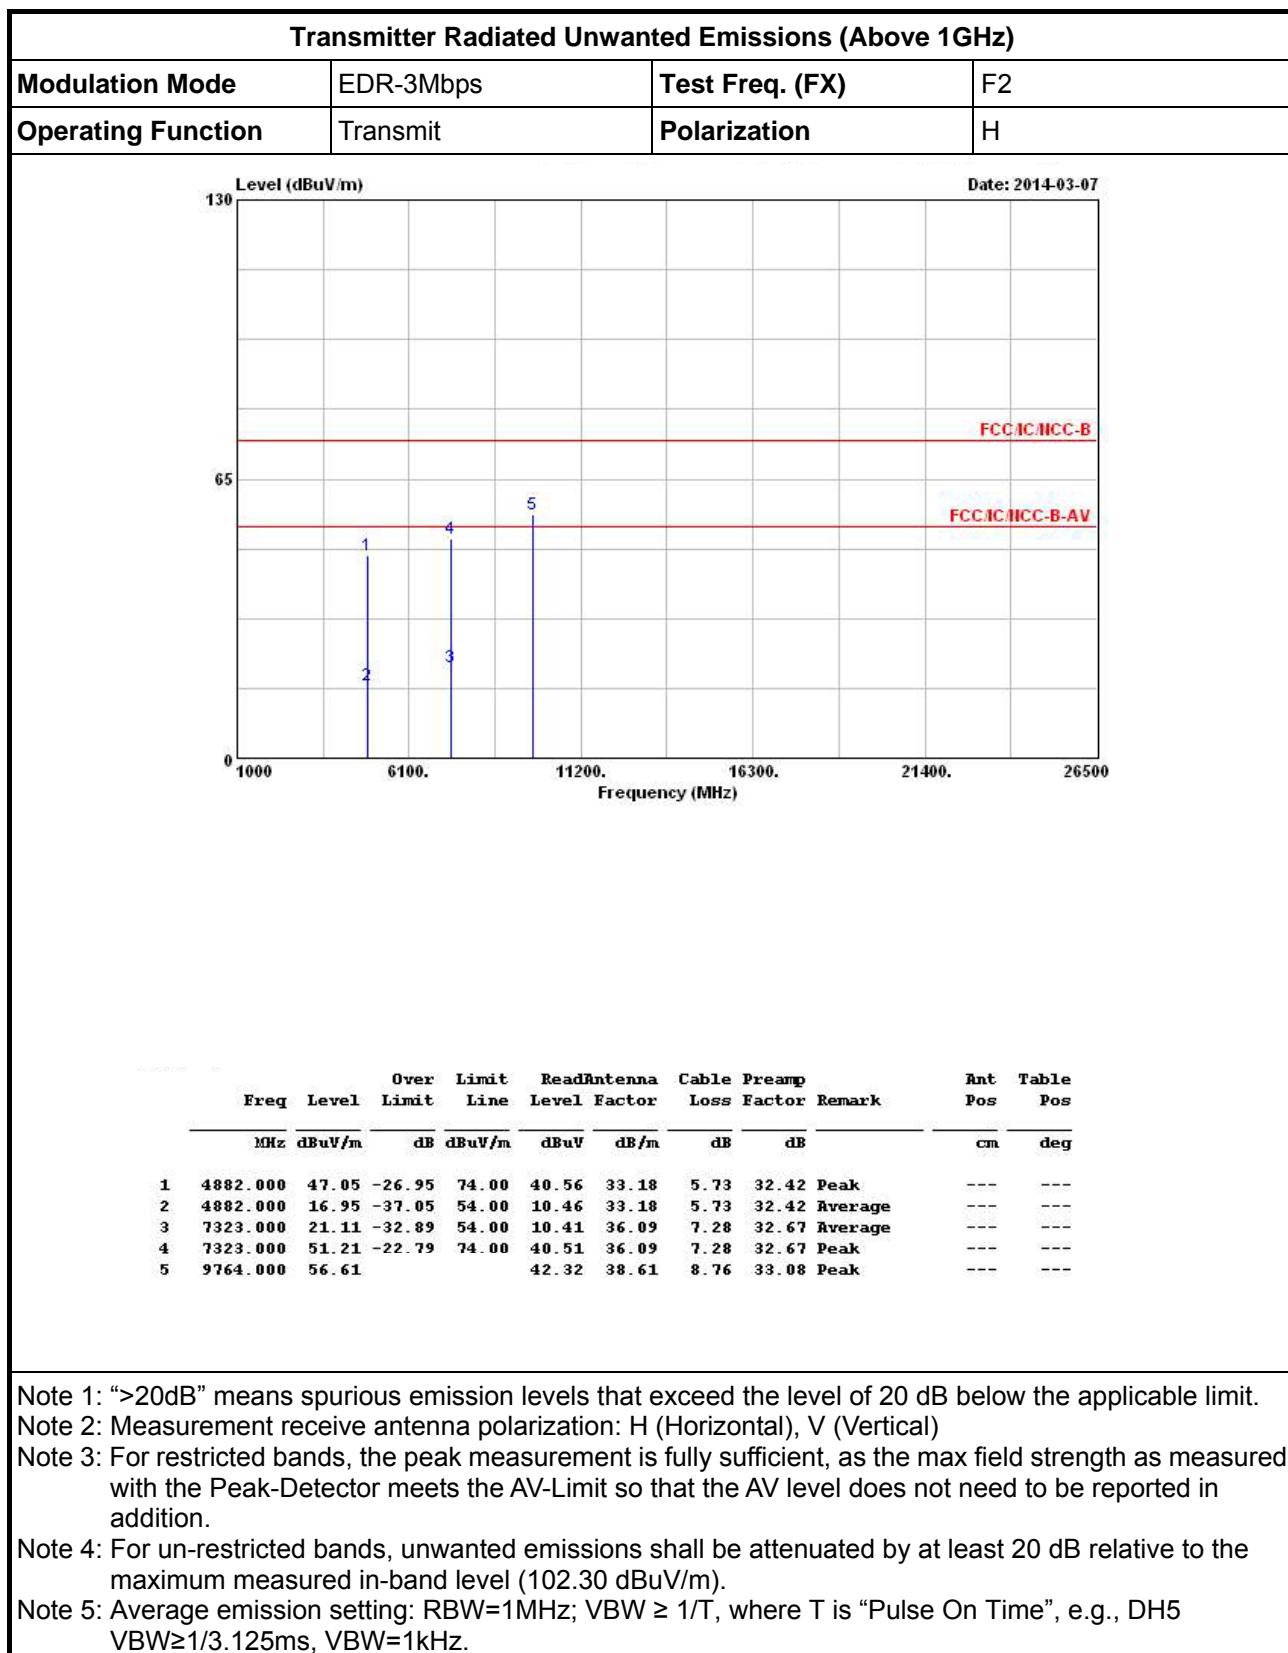



## Transmitter Radiated Unwanted Emissions (Above 1GHz)

<b>Modulation Mode</b>	EDR-3Mbps	<b>Test Freq. (FX)</b>	F3
<b>Operating Function</b>	Transmit	<b>Polarization</b>	V

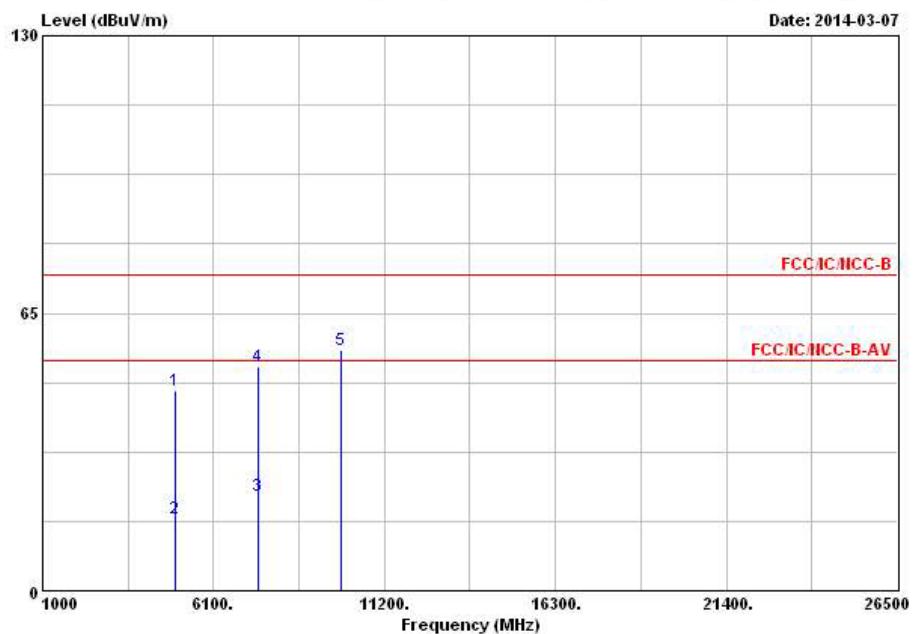

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
		Limit	Line	Level	Factor	Loss	Factor			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
4960.000	46.98	-27.02	74.00	40.30	33.34	5.75	32.41	Peak	---	---
4960.000	16.88	-37.12	54.00	10.20	33.34	5.75	32.41	Average	---	---
7440.000	22.35	-31.65	54.00	11.31	36.38	7.37	32.71	Average	---	---
7440.000	52.45	-21.55	74.00	41.41	36.38	7.37	32.71	Peak	---	---
9920.000	56.44			41.85	38.95	8.71	33.07	Peak	---	---


Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: For un-restricted bands, unwanted emissions shall be attenuated by at least 20 dB relative to the maximum measured in-band level (101.31 dB<sub>UV</sub>/m).

Note 5: Average emission setting:  $RBW=1MHz$ ;  $VBW \geq 1/T$ , where  $T$  is “Pulse On Time”, e.g.,  $DH5$   $VBW \geq 1/3.125ms$ ,  $VBW=1kHz$ .

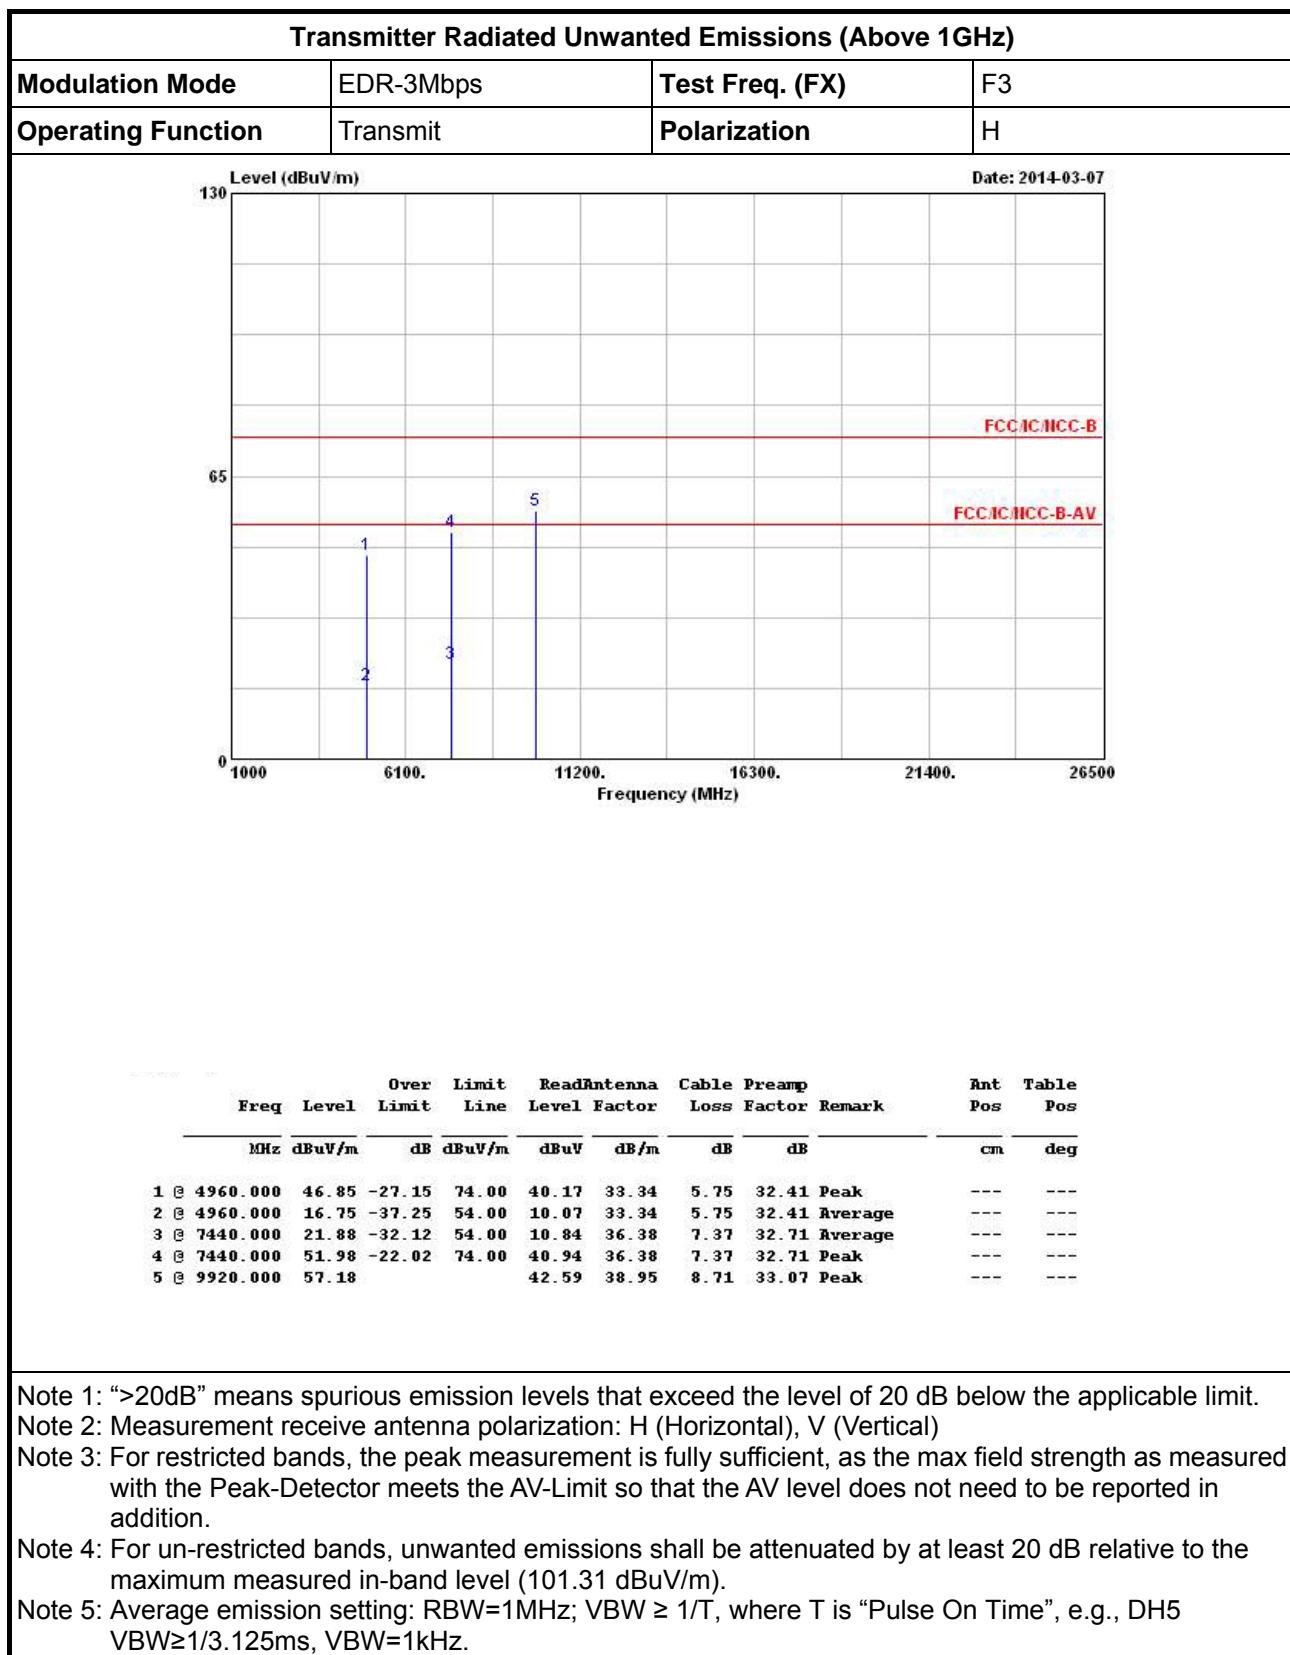



## 4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Mar. 25, 2013	Conduction (CO04-HY)
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Jan. 21, 2014	Conduction (CO04-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	07611832020001	9kHz ~ 30MHz	Oct. 30, 2013	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSV 40	101013	9KHz~40GHz	Jan. 25, 2014	Conducted (TH06-HY)
DC Power Source	G.W.	GPS-3030DD	GEN865896	DC 0V ~ 30V	Nov. 21, 2013	Conducted (TH06-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-001	-20 ~ 100°C	Nov. 21, 2013	Conducted (TH06-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Jun. 27, 2013	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	1027452	300MHz ~ 40GHz	Sep. 11, 2013	Conducted (TH06-HY)
Power Meter	Anritsu	ML2495A	1124009	300MHz ~ 40GHz	Sep. 11, 2013	Conducted (TH06-HY)
RF Cable-2m	HUBER+SUHNER	SUCOFLEX_104	SN 345673/4	30MHz ~ 26.5GHz	Dec. 02, 2013	Conducted (TH06-HY)

Note: Calibration Interval of instruments listed above is one year.



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz ~ 1GHz 3m	Nov. 30, 2013	Radiation (03CH03-HY)
Amplifier	HP	8447D	2944A08033	10kHz ~ 1.3GHz	May. 03, 2013	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1GHz ~ 26.5GHz	Aug. 20, 2013	Radiation (03CH03-HY)
Spectrum	R&S	FSP40	100004	9kHz ~ 40GHz	Mar. 10, 2014	Radiation (03CH03-HY)
Spectrum	R&S	FSP40	100004	9kHz ~ 40GHz	Mar. 11, 2013	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30MHz ~ 1GHz	Sep. 21, 2013	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	May 31, 2013	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz ~ 40GHz	Jan. 10, 2014	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Nov. 16, 2013	Radiation (03CH03-HY)
RF Cable-high	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz ~ 40GHz	Dec. 11, 2013	Radiation (03CH03-HY)
Turn Table	EM Electronics	EM Electronics	060615	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	MF	MF-7802	MF780208179	1 ~ 4 m	N/A	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	TESEQ	HLA 6120	31244	9kHz ~ 30MHz	Dec. 02, 2012	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is two year.