



TEST REPORT

1. Applicant

Name	:	Digitalcom Co., Ltd.
Address	:	303-801 Bucheon Techno Park Ssangyong 3 Cha Apt, 397, Seokcheon-ro, Ojeong-gu, Bucheon-si 421-742, Korea
FCC ID	:	ZMUEVE-PLUS-T

2. Products

Name	:	Wireless Microphone
Model No.	:	EVE PLUS T
Variant Model No.	:	N/A
Manufacturer	:	Digitalcom Co., Ltd.
Address	:	303-801 Bucheon Techno Park Ssangyong 3 Cha Apt, 397, Seokcheon-ro, Ojeong-gu, Bucheon-si 421-742, Korea

3. Test Standard	:	FCC CFR Title 47 Part 15 Subpart C (15.249)
4. Test Method	:	ANSI C63.10-2009
5. Test Result	:	PASS
6. Dates of Test	:	March 18, 2016 to March 24, 2016
7. Date of Issue	:	March 28, 2016

8. Test Laboratory	:	Standard Engineering Co. Ltd. FCC Designation Number : 624439
--------------------	---	--

Tested by	Approved by
	
SoonHo, Kim / Test Engineer	SeongSeok, Seo / Compliance Engineer

This report may not be reproduced without the full written consent of Standard Engineering Laboratory.

	Standard Engineering Co. Ltd. 377-11, Sinjang-ri, Eumam-myeon, Seosan-si, ChoongNam 356-844, South Korea Tel.: +82-41-663-9436, Fax :+82-41-663-9434 www.stdeng.com
---	--



1. Test Summary

Test	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203	ANSI C63.10(2009)	PASS
Conducted Emissions at Mains Terminals	FCC PART 15 C section 15.207	ANSI C63.10(2009)	PASS
Radiated Emissions	47 CFR Part 15, Subpart C Section 15.209	ANSI C63.10(2009)	PASS
Field Strength of Fundamental & Harmonics Emissions	47 CFR Part 15, Subpart C Section 15.249	ANSI C63.10(2009)	PASS
Band Edge	47 CFR Part 15, Subpart C Section 15.249	ANSI C63.10(2009)	PASS

2. TABLE OF CONTENTS

1. Test Summary.....	2
2. Table of Contents.....	3
3. General Information.....	4
3.1 Client Information.....	4
3.2 General Description of E.U.T.....	4
3.3 Details of E.U.T.....	4
3.4 Test Environment and Mode.....	4
3.5 Description of Support Units	5
3.6 Abnormalities from Standard Conditions.....	5
3.7 Other Information Requested by the Customer.....	5
3.8 Test Location.....	5
4. Equipment Used during Test.....	6
5. Test Results and Measurement Data.....	7
5.1 Antenna Requirement.....	7
5.2 Spurious Emissions.....	8
5.2.1Spurious Emissions.....	8
5.2.1.1 Field Strength Of The Fundamental Signal.....	11
5.2.1.2 Harmonics Emissions.....	12
5.3 Band Edge.....	14
** APPENDIX.....	17



3. General Information

3.1. Client Information

Applicant	:	Digitalcom Co., Ltd.
Address of Applicant	:	303-801 Bucheon Techno Park Ssangyong 3 Cha Apt, 397, Seokcheon-ro, Ojeong-gu, Bucheon-si 421-742, Korea
Manufacturer	:	Digitalcom Co., Ltd.
Address of Manufacturer	:	303-801 Bucheon Techno Park Ssangyong 3 Cha Apt, 397, Seokcheon-ro, Ojeong-gu, Bucheon-si 421-742, Korea

3.2. General Description of E.U.T.

Product Name	:	Wireless Microphone
Model No.	:	EVE PLUS T

3.3. Details of E.U.T.

Operation Frequency	:	903.72 MHz ~ 926.84 MHz
Channel Numbers	:	48
Modulation Type	:	FM
Antenna Type	:	Pattern antenna
Antenna Gain	:	1.02 dBi
Power Supply	:	DC 3.7V
Test Voltage	:	DC 3.7V

3.4. Test Environment and Mode

Operating Environment:		
Temperature	:	16.9 °C
Humidity	:	54% RH
Atmospheric Pressure	:	1081 mbar
Test mode:		
Transmitting mode	:	Keep the EUT in transmitting mode with modulation.

3.5. Description of Support Units

The EUT has been tested independent unit.

3.6. Abnormalities from Standard Conditions

None.

3.7. Other Information Requested by the Customer

None.

3.8. Test Location

377-11, Sinjang-ri, Eumam-myeon, Seosan-si, ChoongNam 356-844, South Korea
(FCC Designation Number : 624439)

This test site is in compliance with ISO/IEC 17025 for general requirements for the competence of testing and calibration laboratories.



4. Equipment Used during Test

No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Data	Used equipment
1	EMI Test Receiver	LIG	LSA-265	L07098033	03/08/2016	03/08/2017	<input checked="" type="checkbox"/>
2	EMI Test Receiver	Rhode & Schwarz	ESIB7	3311	02/11/2016	02/11/2017	<input checked="" type="checkbox"/>
2	Bi-log Antenna	Schwarzbeck	VULB9163	164	09/15/2014	09/15/2016	<input checked="" type="checkbox"/>
5	Loop Antenna	EMCO	6502	9206-2769	01/28/2016	01/28/2018	<input checked="" type="checkbox"/>
6	Spectrum Analyzer	Agilent	E4440A	US45303130	01/26/2016	01/26/2017	<input checked="" type="checkbox"/>
8	Frequency Counter	HP	5347A	3009A02742	01/26/2016	01/26/2017	<input type="checkbox"/>
13	Attenuator	Agilent	8495B	3308A22485	01/26/2016	01/26/2017	<input type="checkbox"/>
15	Power Meter	Agilent	E4418B	MY405111655	01/26/2016	01/26/2017	<input type="checkbox"/>
16	Power Sensor	HP	8485A	2347A02746	01/26/2016	01/26/2017	<input type="checkbox"/>
18	RF Cable	Gigalane	SMS102-MF1 41-SMS102-1.0 M	PB1252301285	N/A	N/A	<input type="checkbox"/>
20	Signal Generator	HP	83630A	3420A00728	01/26/2016	01/26/2017	<input checked="" type="checkbox"/>
21	Oscilloscope	HP	54815A	US38380122	01/26/2016	01/26/2017	<input type="checkbox"/>
23	Pre Amplifier	Agilent	8449B	3008A02105	01/26/2016	01/26/2017	<input checked="" type="checkbox"/>
25	Signal Generator	Rhode & Schwarz	SML03	102330	01/26/2016	01/26/2017	<input checked="" type="checkbox"/>
26	POWER DIVIDER	Agilent	11636B	50309	01/26/2016	01/26/2017	<input type="checkbox"/>
27	Power Sensor	Agilent	8482B	3318A05111	01/26/2016	01/26/2017	<input type="checkbox"/>
29	DC Power Supply	HP	6032A	US35420383	01/26/2016	01/26/2017	<input type="checkbox"/>
30	Slidacs	Sunchang Electrics	5KV	N/A	01/26/2016	01/26/2017	<input type="checkbox"/>
32	Bandreject Filter	K&L Microwave	50140	555	01/26/2016	01/26/2017	<input type="checkbox"/>
33	Horn Antenna	Schwarzbeck	BBHA9120A	346	02/05/2016	02/05/2018	<input checked="" type="checkbox"/>
34	Horn Antenna	A.H. SYSTEMS	SAS-572	269	09/03/2015	09/03/2017	<input type="checkbox"/>
35	DC Power Supply	Provice	PWS-5005D	205050	01/26/2016	01/26/2017	<input checked="" type="checkbox"/>
36	Pulse Limiter	Rhode & Schwarz	ESH3-Z2	100137	11/13/2015	11/13/2016	<input checked="" type="checkbox"/>
36	LISN	Rhode & Schwarz	ESH3-Z5	100204	11/13/2015	11/13/2016	<input checked="" type="checkbox"/>



5. Test Results and Measurement Data

5.1. Antenna Requirement

Standard requirement: 47 CFR Part 15C Section 15.203

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna

PASS

The transmitter has an Integrated Pattern antenna. The directional gain of the antenna is 1.02 dBi. please refer to the EUT internal photos.



5.2. Spurious Emissions

5.2.1. Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.249(a) and 15.209				
Test Method:	ANSI C63.10 2009				
Test Site:	Measurement Distance: 3m				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit: (Harmonics Emissions)	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				
Limit: (Field strength of the fundamental signal)	Frequency	Limit (mV/m @3m)		Limit (dBuV/m @3m)	
	902 MHz ~ 928 MHz	50		94	
	Note : 1. RF Field Strength (dBuV) = 20log RF Voltage(uV) 2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.				




Test Procedure:	<ol style="list-style-type: none">a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber and Open Site. The table was rotated 360 degrees to determine the position of the highest radiation.b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.g. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.
Test Mode:	Transmitting mode
Test Results:	Pass




Test Configuration:

1) 9 kHz to 30 MHz emissions:

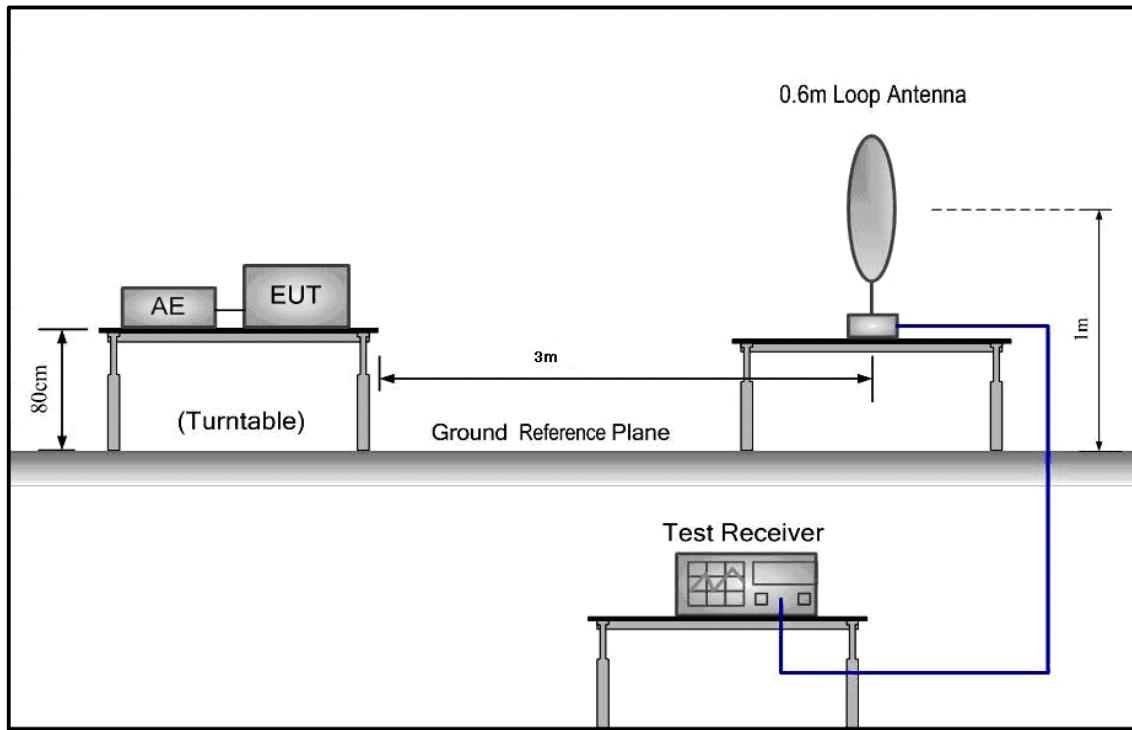


2) 30 MHz to 1 GHz emissions:

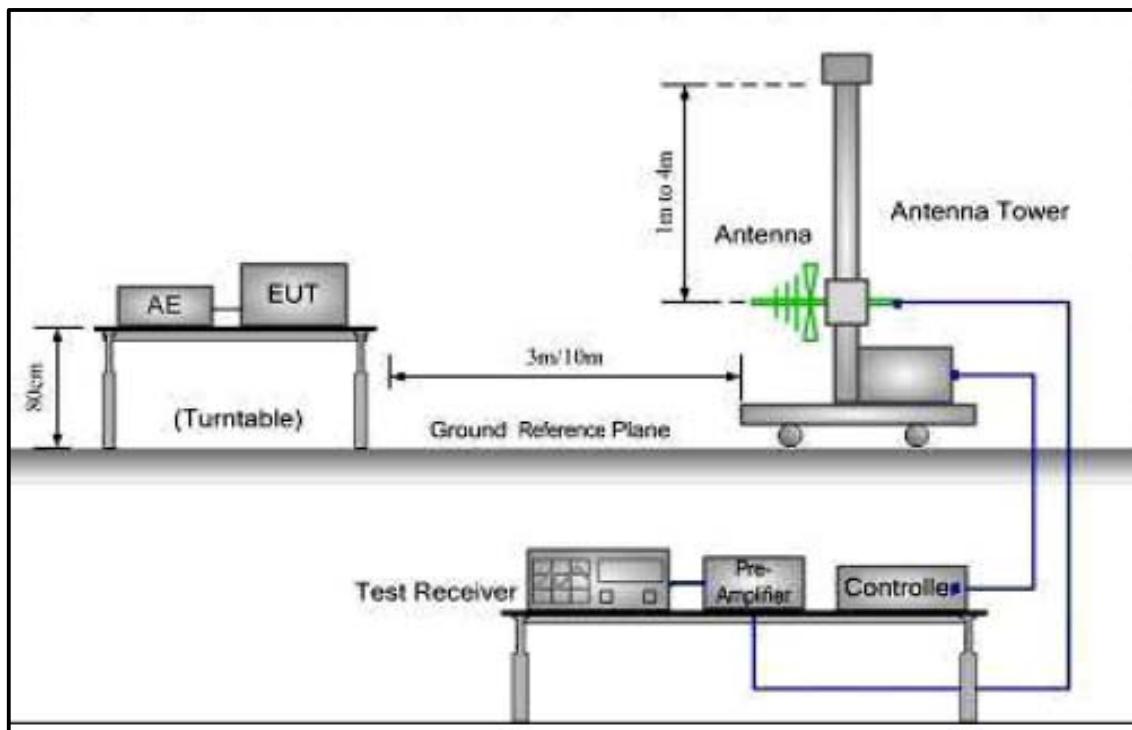



3) 1 GHz to 10 GHz emissions:

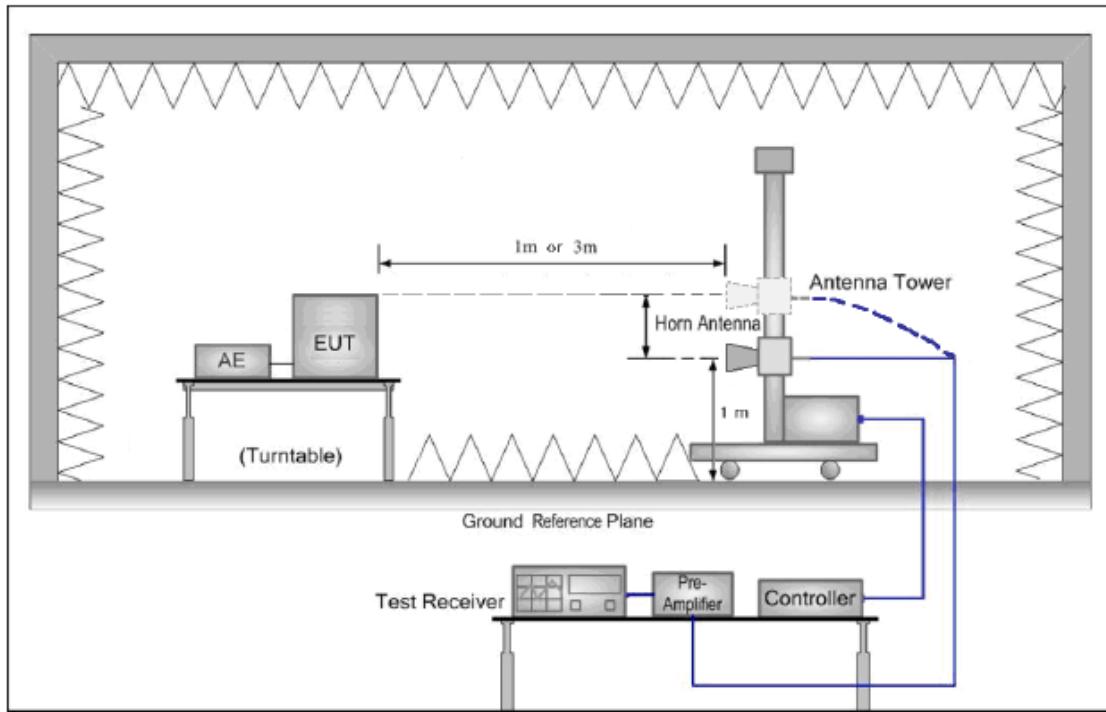

Measurement Data

5.2.1.1. Field Strength Of The Fundamental Signal

Frequency (MHz)	Detector	Reading (dBuV/m)	Correction Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	polarization
903.72	QP	49.89	26.73	76.62	94.00	17.38	Horizontal
	QP	59.27	26.73	86.00	94.00	8.00	Vertical
919.48	QP	51.44	27.04	78.48	94.00	15.52	Horizontal
	QP	61.73	27.04	88.77	94.00	5.23	Vertical
926.84	QP	52.49	27.19	79.68	94.00	14.32	Horizontal
	QP	62.00	27.19	89.19	94.00	4.81	Vertical

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes, but the worst plane data were recorded in the report.

**5.2.1.2. Harmonics Emissions**

1) 9 kHz~30 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

2) Below 1 GHz

Test Channel (MHz)	Frequency (MHz)	Detect Mode	Polarization (V/H)	Measured Value (dB μ V/m)	Antenna Factor + Cable Loss (dB)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
903.72MHz	33.31	QP	V	25.53	15.92	9.61	40.0	14.47
	89.44	QP	V	17.77	10.02	7.75	43.5	25.73
	349.98	QP	V	26.15	16.82	9.33	46.0	19.85
	596.31	QP	V	27.68	22.84	4.84	46.0	18.32
	860.91	QP	V	40.64	26.26	14.38	46.0	5.36
919.48MHz	33.75	QP	V	25.56	15.79	9.77	40.0	14.44
	201.29	QP	V	14.71	10.30	4.41	43.5	28.79
	349.99	QP	V	26.90	16.82	10.08	46.0	19.10
	597.71	QP	V	25.92	22.87	3.05	46.0	20.08
	876.68	QP	V	41.48	26.41	15.07	46.0	4.52
926.84MHz	33.48	QP	V	26.05	15.89	10.16	40.0	13.95
	89.05	QP	V	17.74	10.00	7.74	43.5	25.76
	389.99	QP	V	28.01	17.93	10.08	46.0	17.99
	596.31	QP	V	28.20	22.84	5.36	46.0	17.80
	884.04	QP	V	42.84	26.49	16.35	46.0	3.16



3) Above 1 GHz

Test Channel (MHz)	Frequency (MHz)	Polarization (V/H)	Detect Mode	Measured Value (dB μ V/m)	Correction Factor	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
					Antenna+Cable -Amp. Gain (dB)			
903.72MHz								
919.48MHz								
926.84MHz								

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

Remark:


- 1). The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Emission Level = Measured Value + Antenna Factor + Cable Loss -Amplifier Gain.
- 2). As shown in Section, for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.
- 3). The test only perform the EUT in transmitting status since the test frequencies were over 1GHz only required transmitting status.



5.3. Band Edge


Test Requirement:	47 CFR Part 15C Section 15.249(c)
Test Method:	ANSI C63.10 2009
Test Site:	Measurement Distance: 3m
Limit:	Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.
Test Procedure:	The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters. The antenna can move up and down between 1 meter and 4 meters to fine out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.4:2009 on radiated measurement. The bandwidth below 1 GHz setting on the field strength meter is 120 kHz, above 1 GHz are 1 MHz.

Test Configuration:

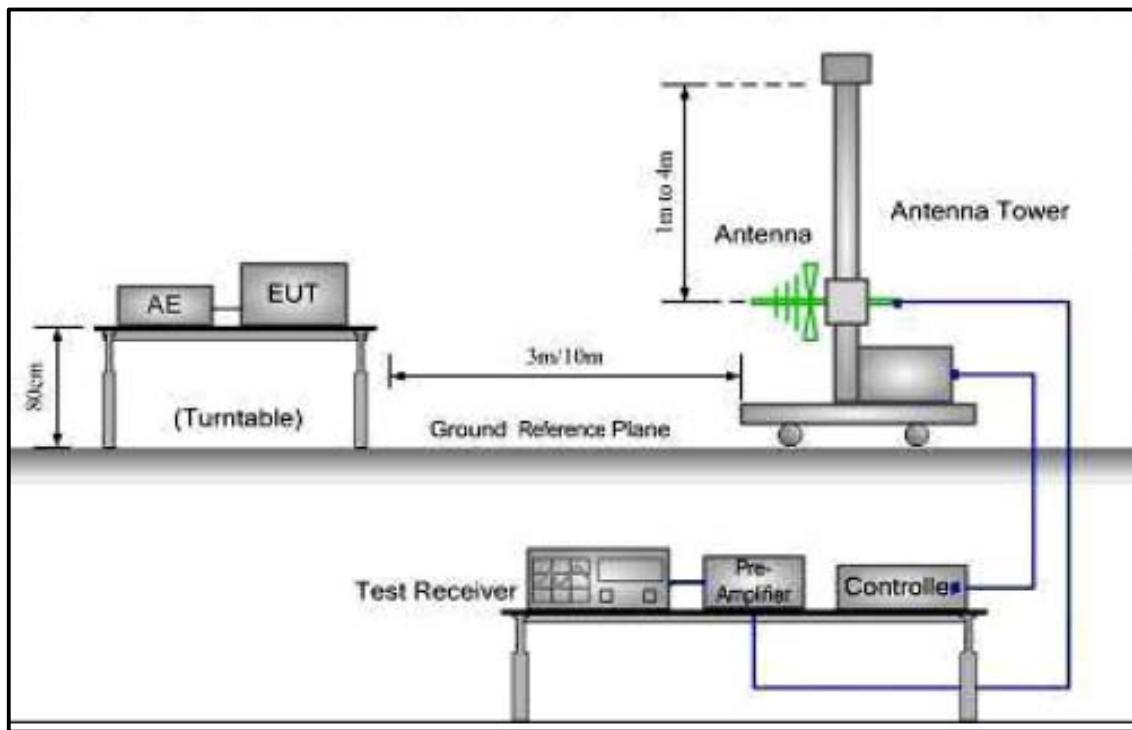


Measurement Data

Test Channel	Polarization	Results
903.72 MHz	Horizontal & Vertical	Pass

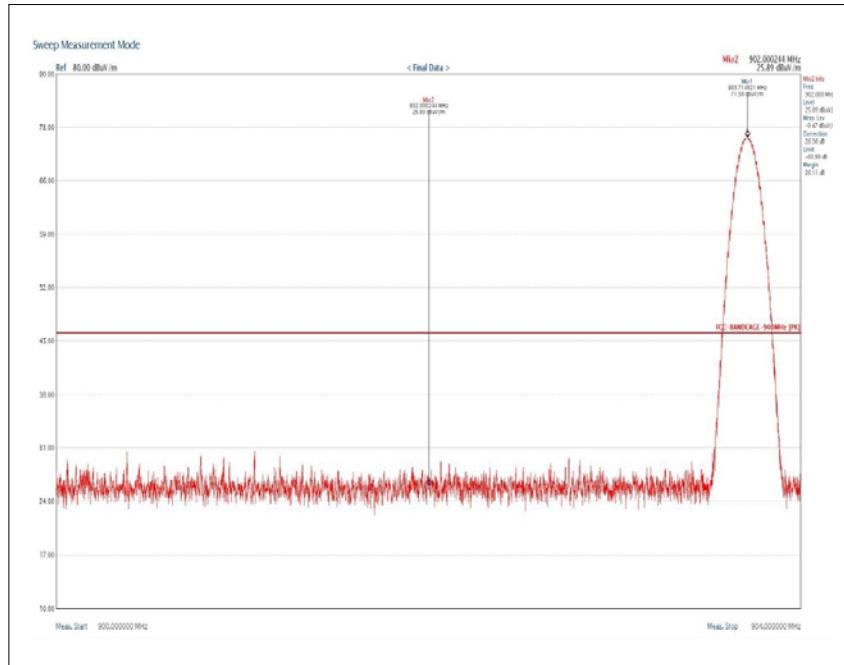

Test Channel	Polarization	Results
903.72 MHz	Horizontal & Vertical	Pass

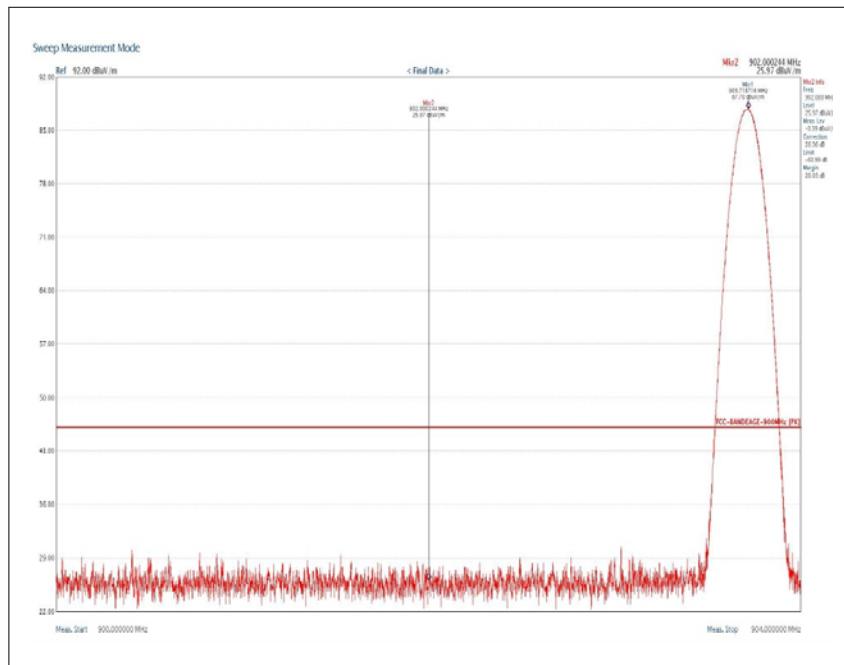




STANDARD ENGINEERING


FCC ID : ZMUEVE-PLUS-T

Report Number : STD-FCC-16010

Test Channel	Polarization	Results
926.84 MHz	Horizontal	Pass

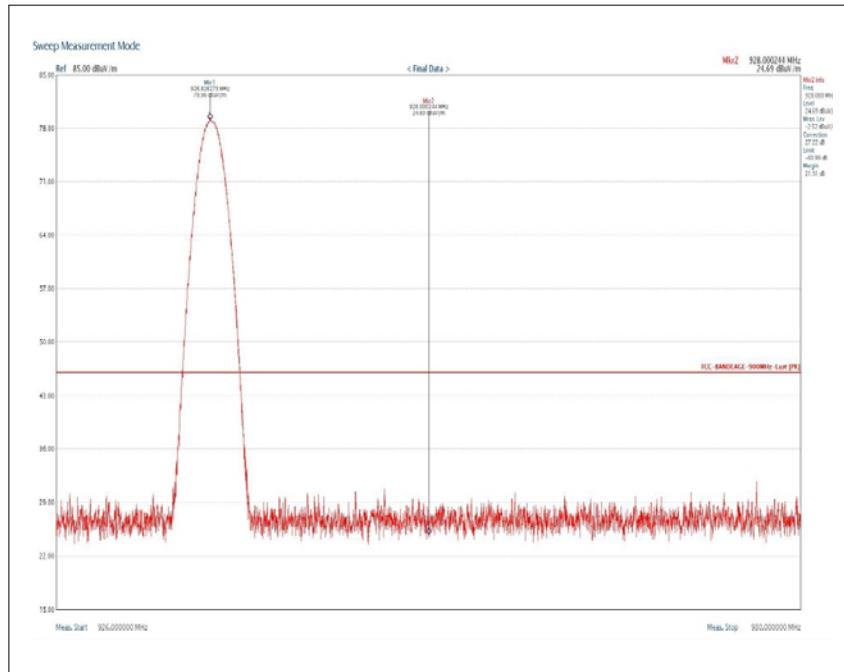

Test Channel	Polarization	Results
926.84 MHz	Vertical	Pass

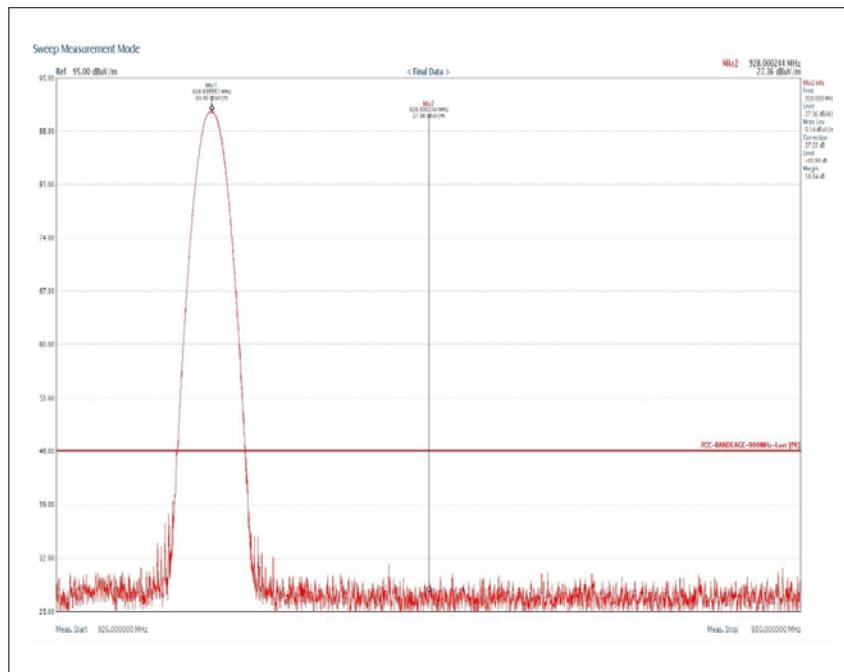



APPENDIX

1. EUT photo

