


5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


5510MHz_TX

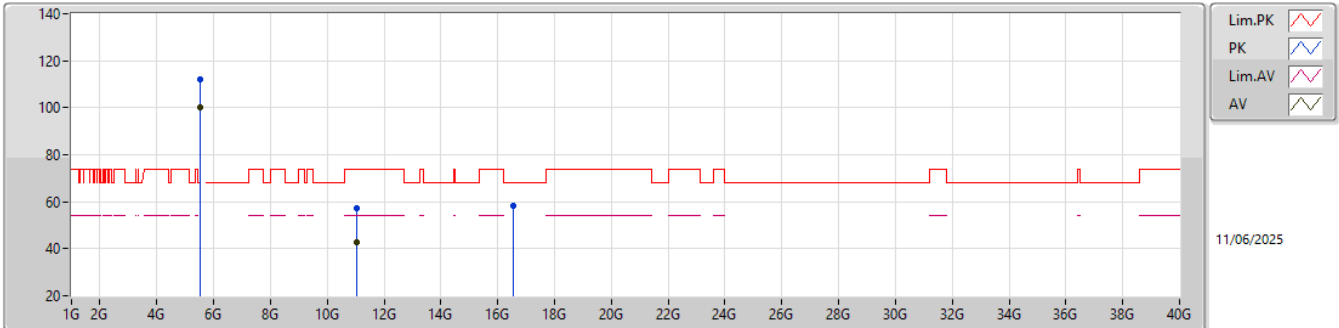

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.51G	100.19	Inf	-Inf	99.86	3	Horizontal	24	3.18	-	31.90	7.26	38.83			
PK	5.51G	112.13	Inf	-Inf	111.80	3	Horizontal	24	3.18	-	31.90	7.26	38.83			
AV	11.02G	42.55	54.00	-11.45	34.68	3	Horizontal	49	3.21	-	40.32	10.11	42.56			
PK	11.02G	57.49	74.00	-16.51	49.62	3	Horizontal	49	3.21	-	40.32	10.11	42.56			
PK	16.53G	58.19	68.20	-10.01	51.59	3	Horizontal	73	1.53	-	40.18	12.13	45.71			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


5510MHz_TX

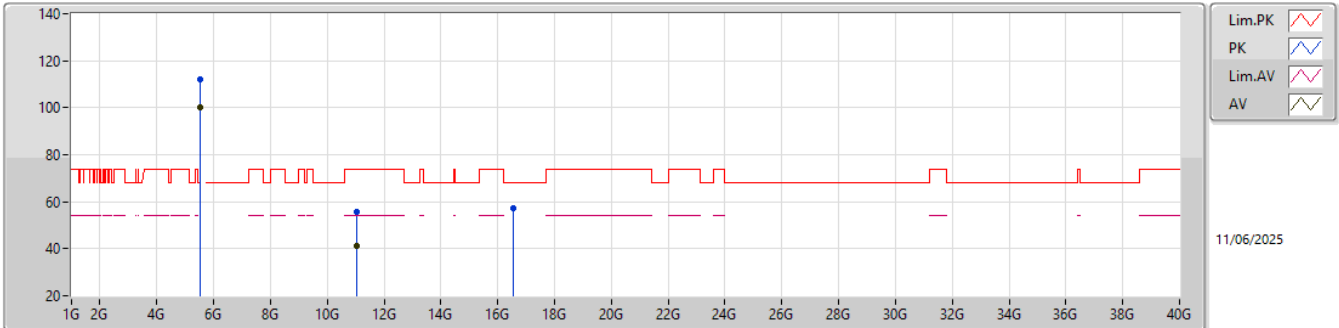

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.51G	99.95	Inf	-Inf	99.62	3	Vertical	278	1.24	-	31.90	7.26	38.83			
PK	5.51G	112.25	Inf	-Inf	111.92	3	Vertical	278	1.24	-	31.90	7.26	38.83			
AV	11.02G	41.46	54.00	-12.54	33.59	3	Vertical	177	1.00	-	40.32	10.11	42.56			
PK	11.02G	55.90	74.00	-18.10	48.03	3	Vertical	177	1.00	-	40.32	10.11	42.56			
PK	16.53G	57.44	68.20	-10.76	50.84	3	Vertical	190	3.01	-	40.18	12.13	45.71			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


5590MHz_TX

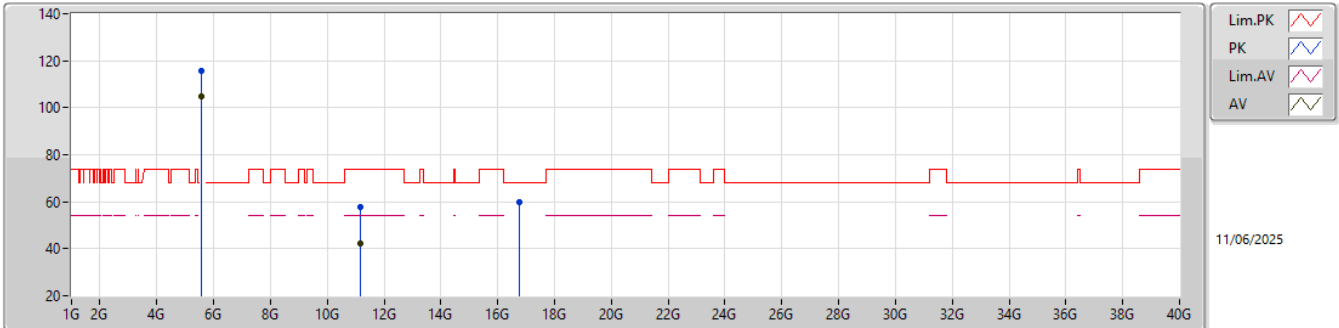

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.59G	104.87	Inf	-Inf	104.58	3	Horizontal	22	3.11	-	31.82	7.30	38.83			
PK	5.59G	115.64	Inf	-Inf	115.35	3	Horizontal	22	3.11	-	31.82	7.30	38.83			
AV	11.18G	42.33	54.00	-11.67	35.29	3	Horizontal	66	3.05	-	39.54	10.14	42.64			
PK	11.18G	57.91	74.00	-16.09	50.87	3	Horizontal	66	3.05	-	39.54	10.14	42.64			
PK	16.77G	59.88	68.20	-8.32	52.64	3	Horizontal	97	1.86	-	41.18	12.21	46.15			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


5590MHz_TX

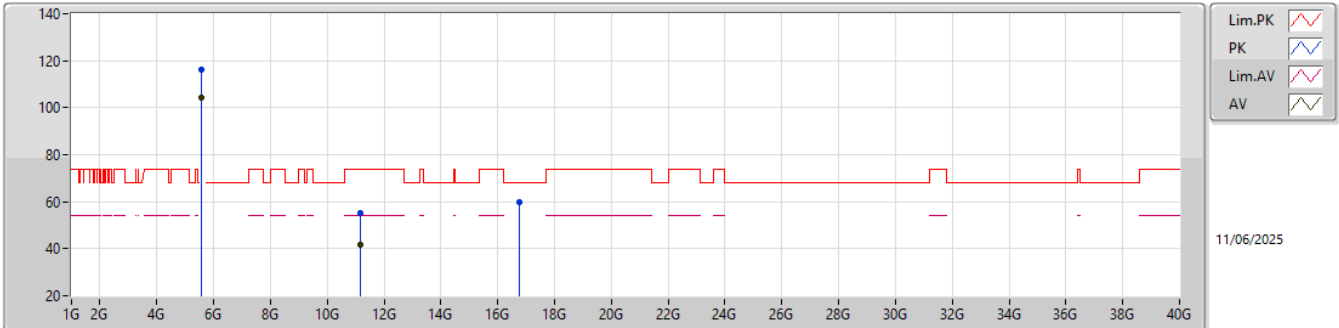

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.59G	104.07	Inf	-Inf	103.78	3	Vertical	280	1.81	-	31.82	7.30	38.83			
PK	5.59G	116.34	Inf	-Inf	116.05	3	Vertical	280	1.81	-	31.82	7.30	38.83			
AV	11.18G	41.89	54.00	-12.11	34.85	3	Vertical	175	1.00	-	39.54	10.14	42.64			
PK	11.18G	55.09	74.00	-18.91	48.05	3	Vertical	175	1.00	-	39.54	10.14	42.64			
PK	16.77G	59.89	68.20	-8.31	52.65	3	Vertical	172	3.10	-	41.18	12.21	46.15			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


5670MHz_TX

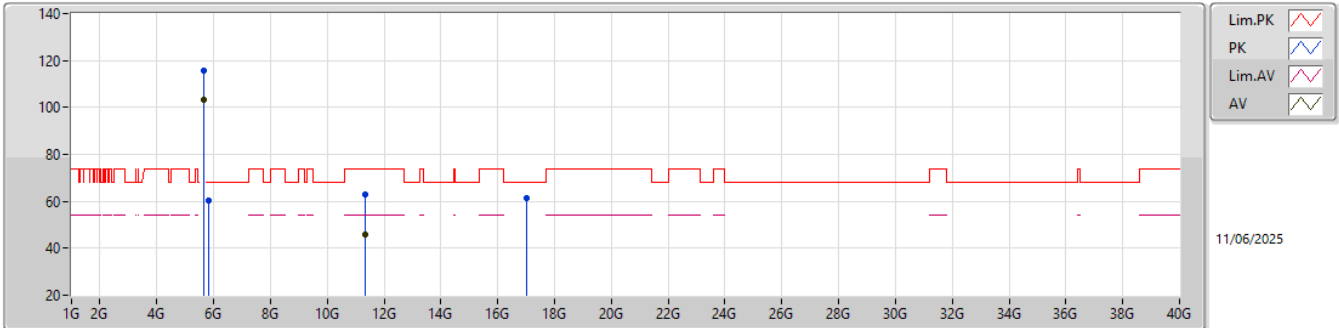

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.67G	103.29	Inf	-Inf	102.92	3	Horizontal	22	3.03	-	31.88	7.33	38.84			
PK	5.67G	115.45	Inf	-Inf	115.08	3	Horizontal	22	3.03	-	31.88	7.33	38.84			
PK	5.83G	60.12	68.20	-8.08	59.20	3	Horizontal	22	3.03	-	32.36	7.40	38.84			
AV	11.34G	45.96	54.00	-8.04	38.73	3	Horizontal	49	1.53	-	39.78	10.16	42.71			
PK	11.34G	63.11	74.00	-10.89	55.88	3	Horizontal	49	1.53	-	39.78	10.16	42.71			
PK	17.01G	61.61	68.20	-6.59	54.84	3	Horizontal	61	2.34	-	41.06	12.29	46.58			

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


5670MHz_TX

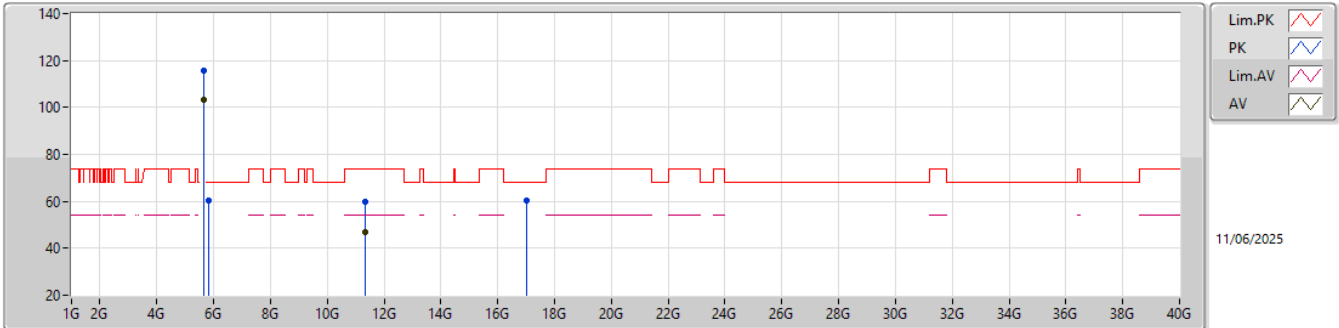

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.67G	103.53	Inf	-Inf	103.16	3	Vertical	273	1.36	-	31.88	7.33	38.84			
PK	5.67G	115.90	Inf	-Inf	115.53	3	Vertical	273	1.36	-	31.88	7.33	38.84			
PK	5.83G	60.44	68.20	-7.76	59.52	3	Vertical	273	1.36	-	32.36	7.40	38.84			
AV	11.34G	46.65	54.00	-7.35	39.42	3	Vertical	180	1.00	-	39.78	10.16	42.71			
PK	11.34G	59.92	74.00	-14.08	52.69	3	Vertical	180	1.00	-	39.78	10.16	42.71			
PK	17.01G	60.13	68.20	-8.07	53.36	3	Vertical	183	3.10	-	41.06	12.29	46.58			

5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


5755MHz_TX

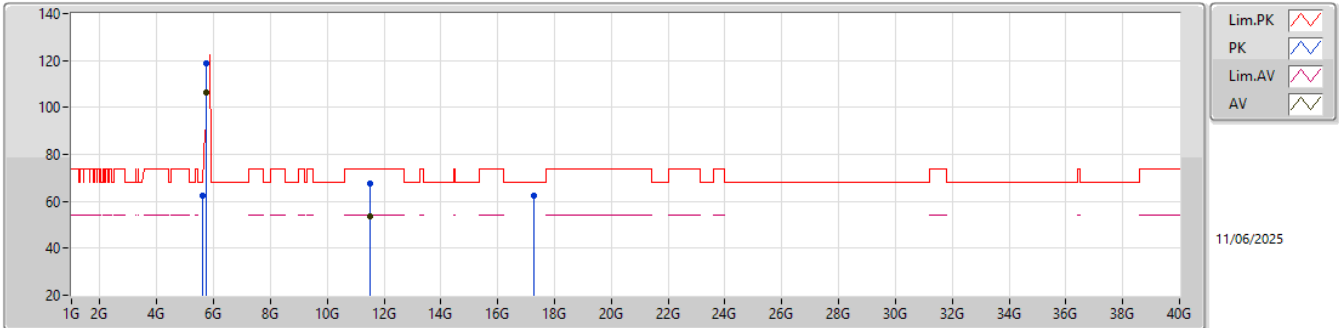

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
PK	5.595G	62.51	68.20	-5.69	62.23	3	Horizontal	4	2.71	-	31.81	7.30	38.83			
AV	5.755G	106.50	Inf	-Inf	105.76	3	Horizontal	4	2.71	-	32.21	7.37	38.84			
PK	5.755G	118.69	Inf	-Inf	117.95	3	Horizontal	4	2.71	-	32.21	7.37	38.84			
AV	11.51G	53.52	54.00	-0.48	46.04	3	Horizontal	55	1.55	-	40.08	10.19	42.79			
PK	11.51G	67.81	74.00	-6.19	60.33	3	Horizontal	55	1.55	-	40.08	10.19	42.79			
PK	17.265G	62.16	68.20	-6.04	55.68	3	Horizontal	67	1.96	-	41.13	12.42	47.07			

5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


5755MHz_TX

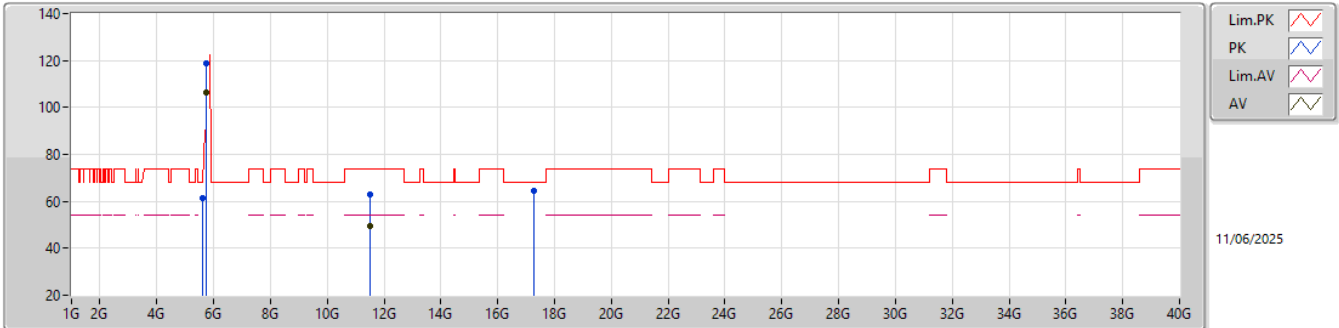

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
PK	5.595G	61.61	68.20	-6.59	61.33	3	Vertical	267	1.48	-	31.81	7.30	38.83			
AV	5.755G	106.62	Inf	-Inf	105.88	3	Vertical	267	1.48	-	32.21	7.37	38.84			
PK	5.755G	118.82	Inf	-Inf	118.08	3	Vertical	267	1.48	-	32.21	7.37	38.84			
AV	11.51G	49.26	54.00	-4.74	41.78	3	Vertical	68	1.49	-	40.08	10.19	42.79			
PK	11.51G	62.82	74.00	-11.18	55.34	3	Vertical	68	1.49	-	40.08	10.19	42.79			
PK	17.265G	64.63	68.20	-3.57	58.15	3	Vertical	171	2.89	-	41.13	12.42	47.07			

5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


5795MHz_TX

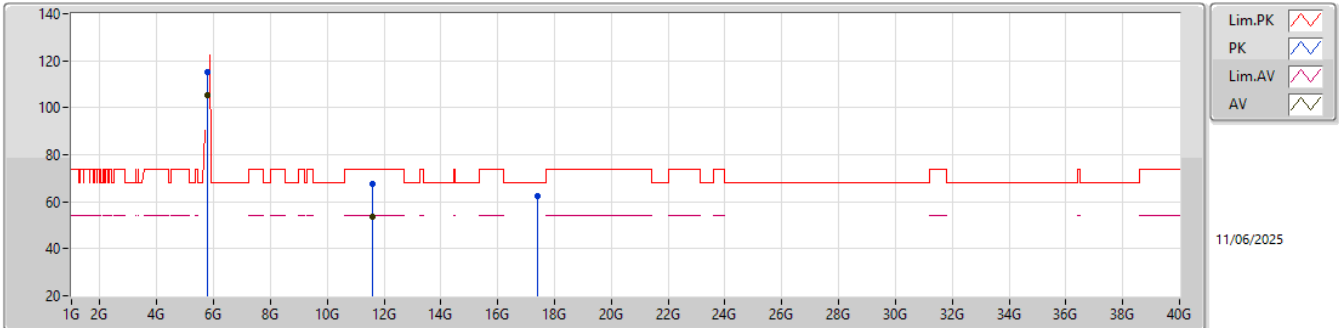

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.795G	105.17	Inf	-Inf	104.33	3	Horizontal	81	3.00	-	32.29	7.39	38.84			
PK	5.795G	115.34	Inf	-Inf	114.50	3	Horizontal	81	3.00	-	32.29	7.39	38.84			
AV	11.59G	53.80	54.00	-0.20	46.65	3	Horizontal	62	1.72	-	39.76	10.20	42.81			
PK	11.59G	67.75	74.00	-6.25	60.60	3	Horizontal	62	1.72	-	39.76	10.20	42.81			
PK	17.385G	62.20	68.20	-6.00	55.34	3	Horizontal	60	1.68	-	41.68	12.48	47.30			

5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_2TX


5795MHz_TX

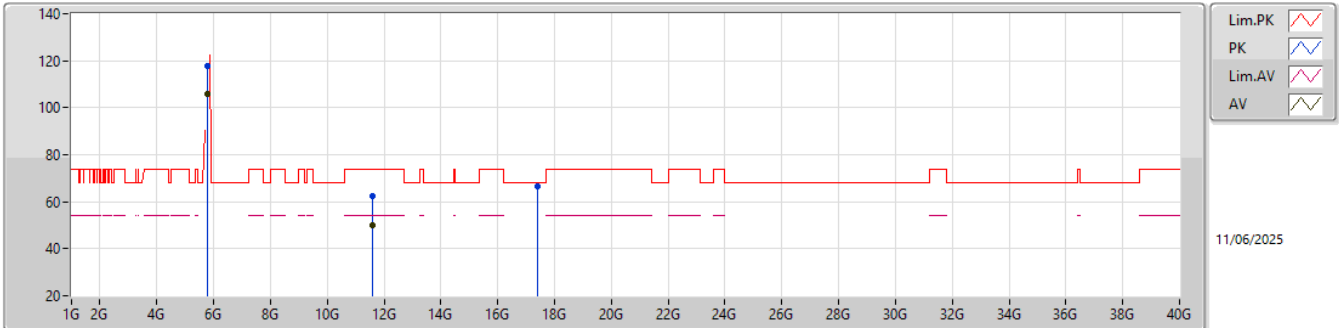

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.795G	106.05	Inf	-Inf	105.21	3	Vertical	266	1.49	-	32.29	7.39	38.84			
PK	5.795G	117.65	Inf	-Inf	116.81	3	Vertical	266	1.49	-	32.29	7.39	38.84			
AV	11.59G	50.04	54.00	-3.96	42.89	3	Vertical	64	2.17	-	39.76	10.20	42.81			
PK	11.59G	62.57	74.00	-11.43	55.42	3	Vertical	64	2.17	-	39.76	10.20	42.81			
PK	17.385G	66.71	68.20	-1.49	59.85	3	Vertical	168	2.88	-	41.68	12.48	47.30			

5.15-5.25GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


5210MHz_TX

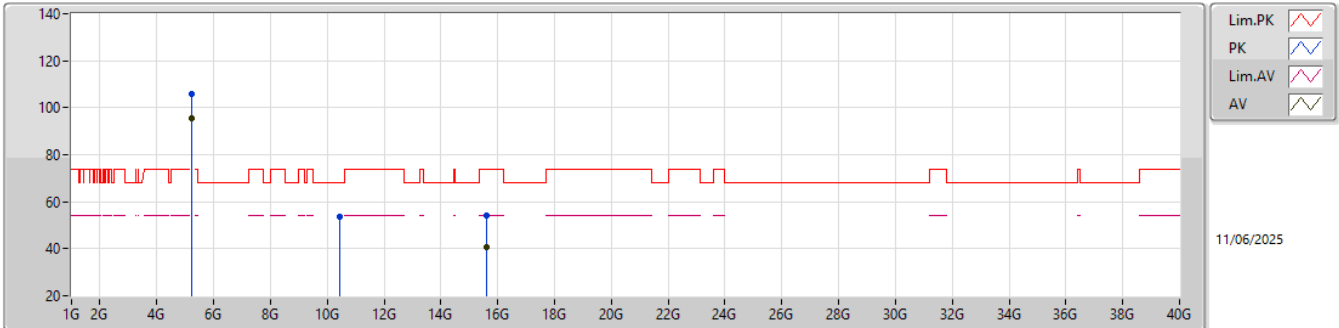

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.21G	95.27	Inf	-Inf	95.02	3	Horizontal	17	1.92	-	31.94	7.04	38.73			
PK	5.21G	105.92	Inf	-Inf	105.67	3	Horizontal	17	1.92	-	31.94	7.04	38.73			
PK	10.42G	53.81	68.20	-14.39	46.09	3	Horizontal	241	1.00	-	39.84	10.01	42.13			
AV	15.63G	40.54	54.00	-13.46	36.67	3	Horizontal	76	1.00	-	38.02	11.47	45.62			
PK	15.63G	53.98	74.00	-20.02	50.11	3	Horizontal	76	1.00	-	38.02	11.47	45.62			

5.15-5.25GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


5210MHz_TX

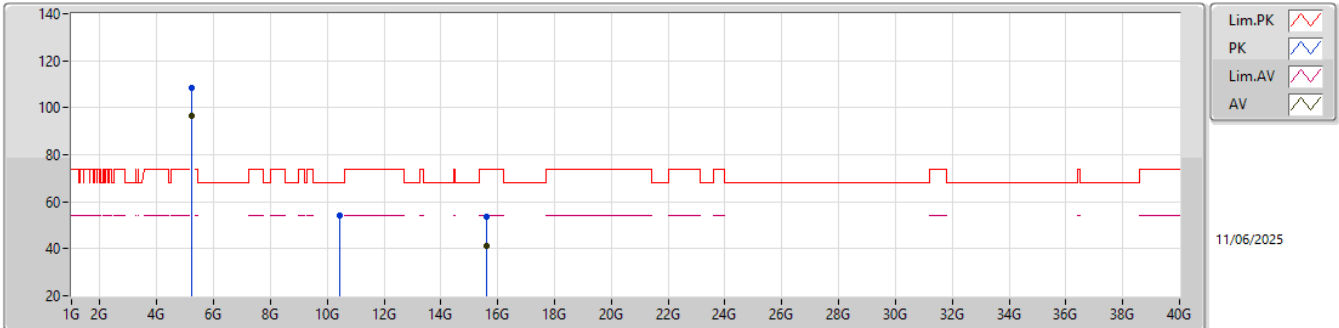

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.21G	96.51	Inf	-Inf	96.26	3	Vertical	264	1.47	-	31.94	7.04	38.73			
PK	5.21G	108.46	Inf	-Inf	108.21	3	Vertical	264	1.47	-	31.94	7.04	38.73			
PK	10.42G	54.25	68.20	-13.95	46.53	3	Vertical	10	1.00	-	39.84	10.01	42.13			
AV	15.63G	41.20	54.00	-12.80	37.33	3	Vertical	177	2.76	-	38.02	11.47	45.62			
PK	15.63G	53.75	74.00	-20.25	49.88	3	Vertical	177	2.76	-	38.02	11.47	45.62			

5.25-5.35GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


5290MHz_TX

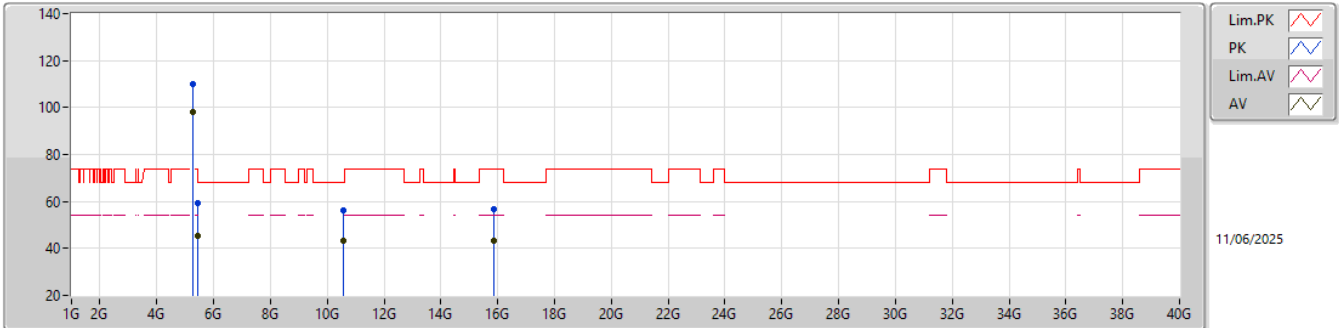

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.29G	98.06	Inf	-Inf	98.16	3	Horizontal	359	2.03	-	31.54	7.11	38.75			
PK	5.29G	109.77	Inf	-Inf	109.87	3	Horizontal	359	2.03	-	31.54	7.11	38.75			
AV	5.45G	45.25	54.00	-8.75	45.03	3	Horizontal	359	2.03	-	31.80	7.23	38.81			
PK	5.45G	59.42	74.00	-14.58	59.20	3	Horizontal	359	2.03	-	31.80	7.23	38.81			
AV	10.58G	43.28	Inf	-Inf	35.53	3	Horizontal	130	2.42	-	39.96	10.03	42.24			
PK	10.58G	56.37	68.20	-11.83	48.62	3	Horizontal	130	2.42	-	39.96	10.03	42.24			
AV	15.87G	43.13	54.00	-10.87	38.86	3	Horizontal	322	2.49	-	38.08	11.69	45.50			
PK	15.87G	56.61	74.00	-17.39	52.34	3	Horizontal	322	2.49	-	38.08	11.69	45.50			

5.25-5.35GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


5290MHz_TX

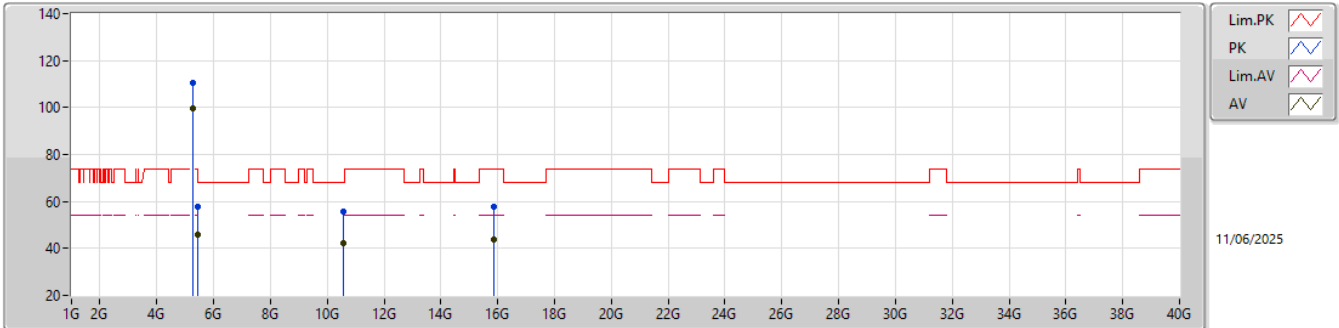

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.29G	99.49	Inf	-Inf	99.59	3	Vertical	277	1.24	-	31.54	7.11	38.75			
PK	5.29G	110.36	Inf	-Inf	110.46	3	Vertical	277	1.24	-	31.54	7.11	38.75			
AV	5.45G	45.63	54.00	-8.37	45.41	3	Vertical	277	1.24	-	31.80	7.23	38.81			
PK	5.45G	57.82	74.00	-16.18	57.60	3	Vertical	277	1.24	-	31.80	7.23	38.81			
AV	10.58G	42.28	Inf	-Inf	34.53	3	Vertical	169	3.18	-	39.96	10.03	42.24			
PK	10.58G	55.44	68.20	-12.76	47.69	3	Vertical	169	3.18	-	39.96	10.03	42.24			
AV	15.87G	43.82	54.00	-10.18	39.55	3	Vertical	206	3.01	-	38.08	11.69	45.50			
PK	15.87G	57.74	74.00	-16.26	53.47	3	Vertical	206	3.01	-	38.08	11.69	45.50			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


5530MHz_TX

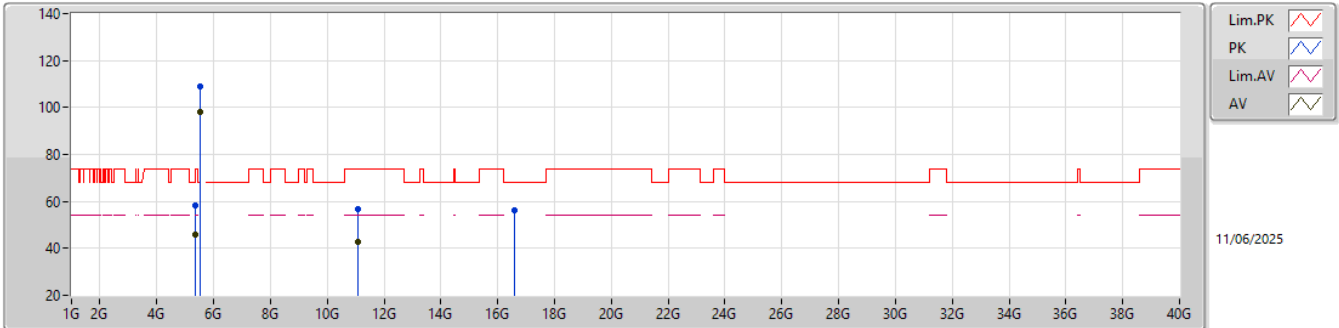

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)				
AV	5.37G	45.65	54.00	-8.35	45.67	3	Horizontal	26	3.13	-	31.58	7.18	38.78				
PK	5.37G	58.05	74.00	-15.95	58.07	3	Horizontal	26	3.13	-	31.58	7.18	38.78				
AV	5.53G	97.98	Inf	-Inf	97.64	3	Horizontal	26	3.13	-	31.90	7.27	38.83				
PK	5.53G	108.89	Inf	-Inf	108.55	3	Horizontal	26	3.13	-	31.90	7.27	38.83				
AV	11.06G	42.97	54.00	-11.03	35.29	3	Horizontal	53	2.97	-	40.14	10.12	42.58				
PK	11.06G	56.65	74.00	-17.35	48.97	3	Horizontal	53	2.97	-	40.14	10.12	42.58				
PK	16.59G	56.04	68.20	-12.16	49.77	3	Horizontal	65	1.38	-	39.94	12.15	45.82				

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


5530MHz_TX

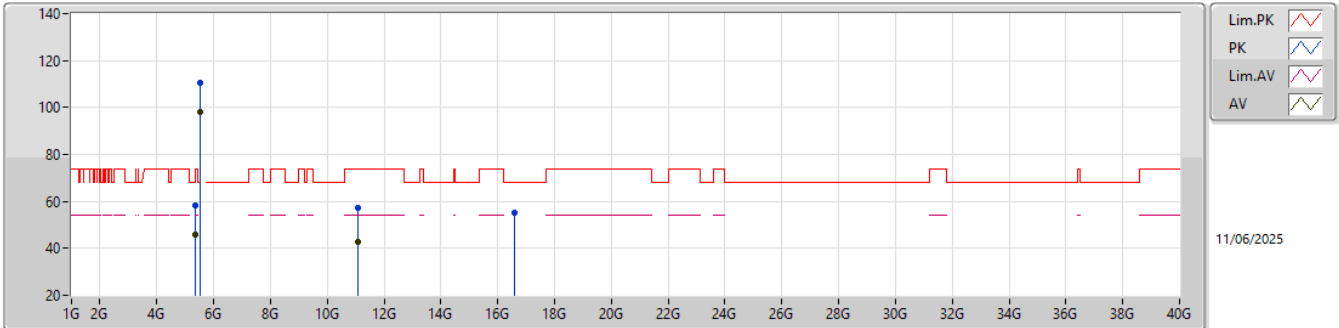

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)				
AV	5.37G	46.05	54.00	-7.95	46.07	3	Vertical	282	1.59	-	31.58	7.18	38.78				
PK	5.37G	58.26	74.00	-15.74	58.28	3	Vertical	282	1.59	-	31.58	7.18	38.78				
AV	5.53G	98.06	Inf	-Inf	97.72	3	Vertical	282	1.89	-	31.90	7.27	38.83				
PK	5.53G	110.37	Inf	-Inf	110.03	3	Vertical	282	1.89	-	31.90	7.27	38.83				
AV	11.06G	42.89	54.00	-11.11	35.21	3	Vertical	56	3.20	-	40.14	10.12	42.58				
PK	11.06G	57.11	74.00	-16.89	49.43	3	Vertical	56	3.20	-	40.14	10.12	42.58				
PK	16.59G	55.26	68.20	-12.94	48.99	3	Vertical	83	1.00	-	39.94	12.15	45.82				

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


5610MHz_TX

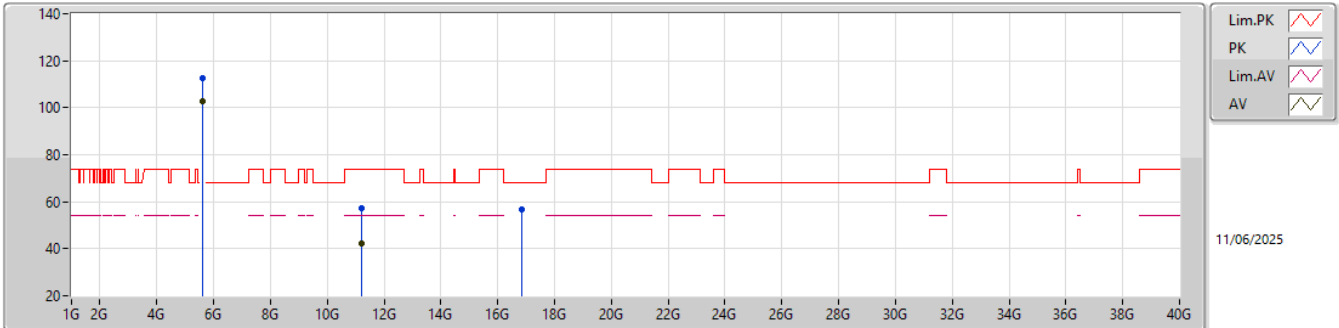

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.61G	102.55	Inf	-Inf	102.28	3	Horizontal	23	3.11	-	31.80	7.30	38.83			
PK	5.61G	112.74	Inf	-Inf	112.47	3	Horizontal	23	3.11	-	31.80	7.30	38.83			
AV	11.22G	42.06	54.00	-11.94	35.03	3	Horizontal	47	3.02	-	39.54	10.15	42.66			
PK	11.22G	57.44	74.00	-16.56	50.41	3	Horizontal	47	3.02	-	39.54	10.15	42.66			
PK	16.83G	56.58	68.20	-11.62	49.18	3	Horizontal	93	1.70	-	41.42	12.23	46.25			

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


5610MHz_TX

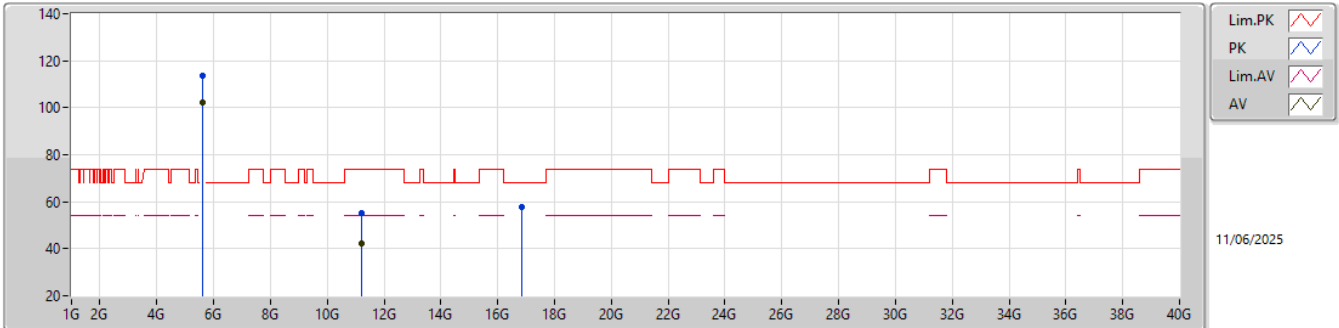

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.61G	102.37	Inf	-Inf	102.10	3	Vertical	282	1.24	-	31.80	7.30	38.83			
PK	5.61G	113.59	Inf	-Inf	113.32	3	Vertical	282	1.24	-	31.80	7.30	38.83			
AV	11.22G	42.46	54.00	-11.54	35.43	3	Vertical	173	1.00	-	39.54	10.15	42.66			
PK	11.22G	55.14	74.00	-18.86	48.11	3	Vertical	173	1.00	-	39.54	10.15	42.66			
PK	16.83G	57.67	68.20	-10.53	50.27	3	Vertical	191	2.94	-	41.42	12.23	46.25			

5.725-5.85GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


5775MHz_TX

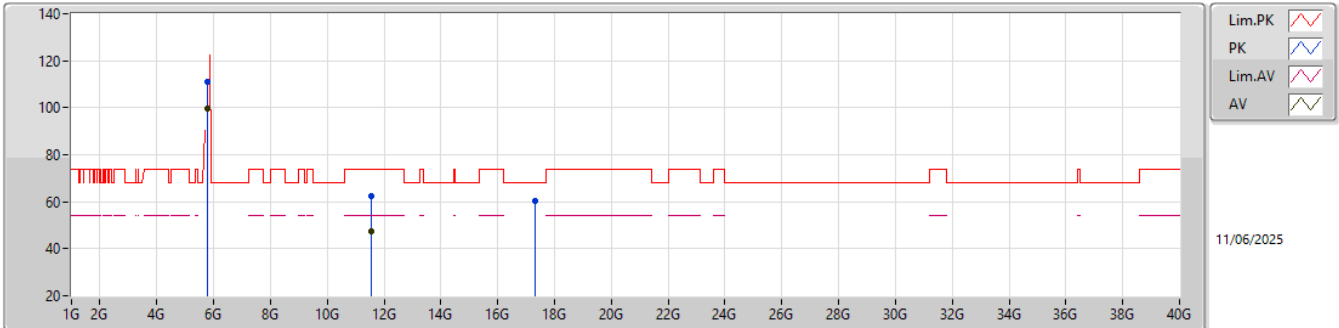

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.775G	99.46	Inf	-Inf	98.67	3	Horizontal	4	2.58	-	32.25	7.38	38.84			
PK	5.775G	111.03	Inf	-Inf	110.24	3	Horizontal	4	2.58	-	32.25	7.38	38.84			
AV	11.55G	47.48	54.00	-6.52	40.09	3	Horizontal	64	1.78	-	40.00	10.19	42.80			
PK	11.55G	62.67	74.00	-11.33	55.28	3	Horizontal	64	1.78	-	40.00	10.19	42.80			
PK	17.325G	60.21	68.20	-7.99	53.64	3	Horizontal	61	1.53	-	41.30	12.45	47.18			

5.725-5.85GHz_802.11ax HEW80_Nss1,(MCS0)_2TX


5775MHz_TX

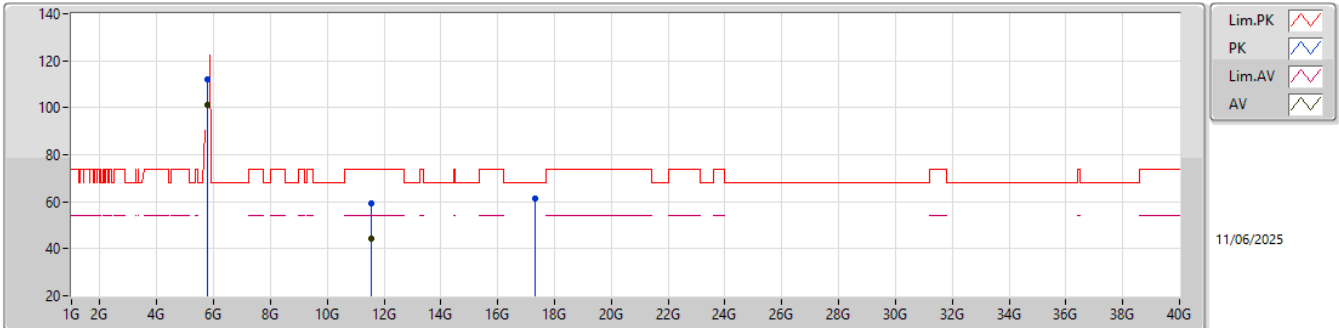

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.775G	101.40	Inf	-Inf	100.61	3	Vertical	264	1.59	-	32.25	7.38	38.84			
PK	5.775G	112.24	Inf	-Inf	111.45	3	Vertical	264	1.59	-	32.25	7.38	38.84			
AV	11.55G	44.38	54.00	-9.62	36.99	3	Vertical	33	1.54	-	40.00	10.19	42.80			
PK	11.55G	59.09	74.00	-14.91	51.70	3	Vertical	33	1.54	-	40.00	10.19	42.80			
PK	17.325G	61.49	68.20	-6.71	54.92	3	Vertical	172	2.93	-	41.30	12.45	47.18			

5.15-5.25GHz_802.11ax HEW160_Nss1,(MCS0)_2TX


5250MHz Straddle 5.15-5.25GHz_TX

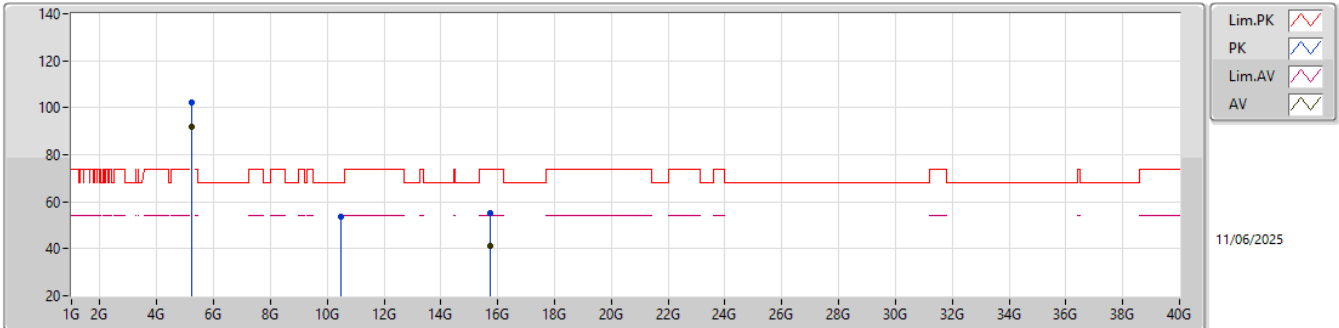

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.25G	91.85	Inf	-Inf	91.81	3	Horizontal	19	2.17	-	31.70	7.08	38.74			
PK	5.25G	102.43	Inf	-Inf	102.39	3	Horizontal	19	2.17	-	31.70	7.08	38.74			
PK	10.5G	53.83	68.20	-14.37	46.19	3	Horizontal	99	1.00	-	39.80	10.02	42.18			
AV	15.75G	41.01	54.00	-12.99	36.59	3	Horizontal	30	1.00	-	38.40	11.58	45.56			
PK	15.75G	55.08	74.00	-18.92	50.66	3	Horizontal	30	1.00	-	38.40	11.58	45.56			

5.15-5.25GHz_802.11ax HEW160_Nss1,(MCS0)_2TX


5250MHz Straddle 5.15-5.25GHz_TX

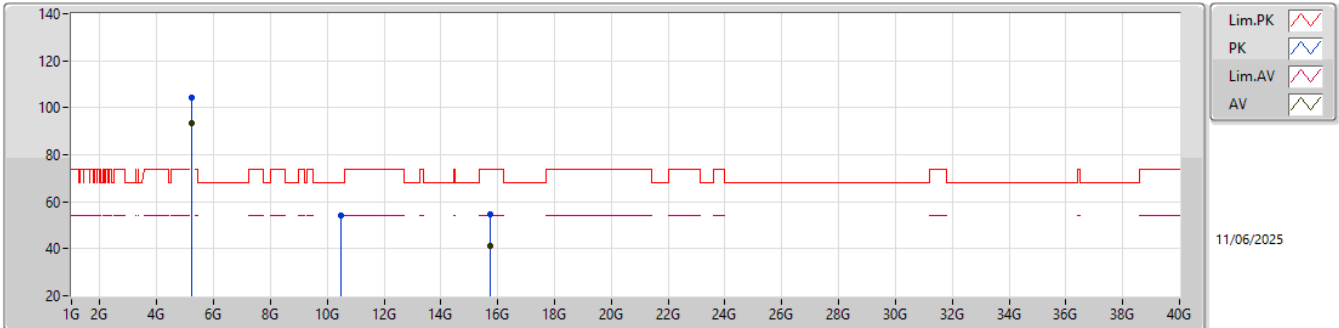

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.25G	93.43	Inf	-Inf	93.39	3	Vertical	266	1.49	-	31.70	7.08	38.74			
PK	5.25G	104.35	Inf	-Inf	104.31	3	Vertical	266	1.49	-	31.70	7.08	38.74			
PK	10.5G	54.37	68.20	-13.83	46.73	3	Vertical	34	1.00	-	39.80	10.02	42.18			
AV	15.75G	41.23	54.00	-12.77	36.81	3	Vertical	58	1.00	-	38.40	11.58	45.56			
PK	15.75G	54.85	74.00	-19.15	50.43	3	Vertical	58	1.00	-	38.40	11.58	45.56			

5.47-5.725GHz_802.11ax HEW160_Nss1,(MCS0)_2TX


5570MHz_TX

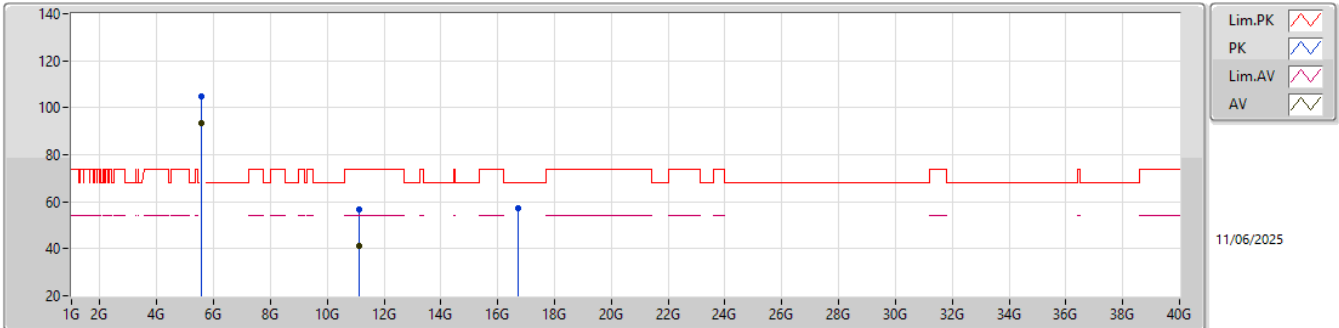


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.57G	93.38	Inf	-Inf	93.06	3	Horizontal	21	3.49	-	31.86	7.29	38.83			
PK	5.57G	104.98	Inf	-Inf	104.66	3	Horizontal	21	3.49	-	31.86	7.29	38.83			
AV	11.14G	41.29	54.00	-12.71	34.12	3	Horizontal	36	1.00	-	39.66	10.13	42.62			
PK	11.14G	56.80	74.00	-17.20	49.63	3	Horizontal	36	1.00	-	39.66	10.13	42.62			
PK	16.71G	57.24	68.20	-10.96	50.23	3	Horizontal	69	1.00	-	40.86	12.19	46.04			


5.47-5.725GHz_802.11ax_HEW160_Nss1,(MCS0)_2TX


5570MHz_TX

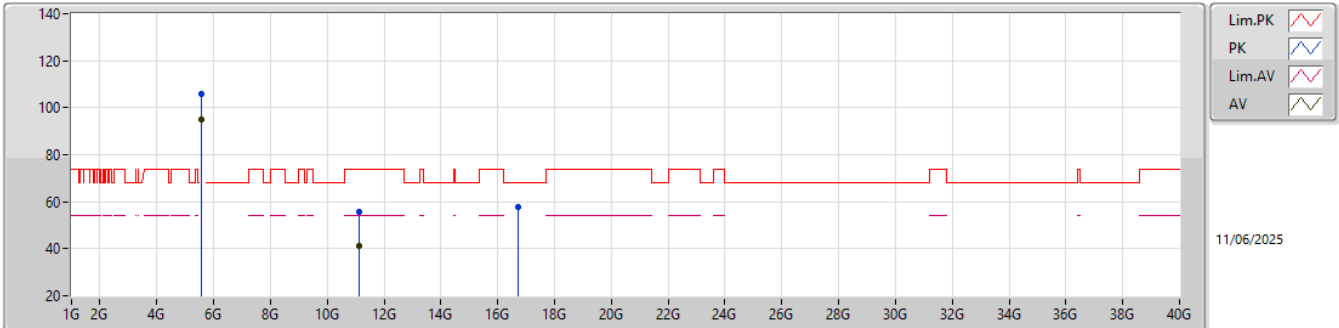



Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	5.57G	95.07	Inf	-Inf	94.75	3	Vertical	271	1.51	-	31.86	7.29	38.83			
PK	5.57G	105.82	Inf	-Inf	105.50	3	Vertical	271	1.51	-	31.86	7.29	38.83			
AV	11.14G	41.20	54.00	-12.80	34.03	3	Vertical	103	1.00	-	39.66	10.13	42.62			
PK	11.14G	55.53	74.00	-18.47	48.36	3	Vertical	103	1.00	-	39.66	10.13	42.62			
PK	16.71G	57.54	68.20	-10.66	50.53	3	Vertical	77	1.00	-	40.86	12.19	46.04			

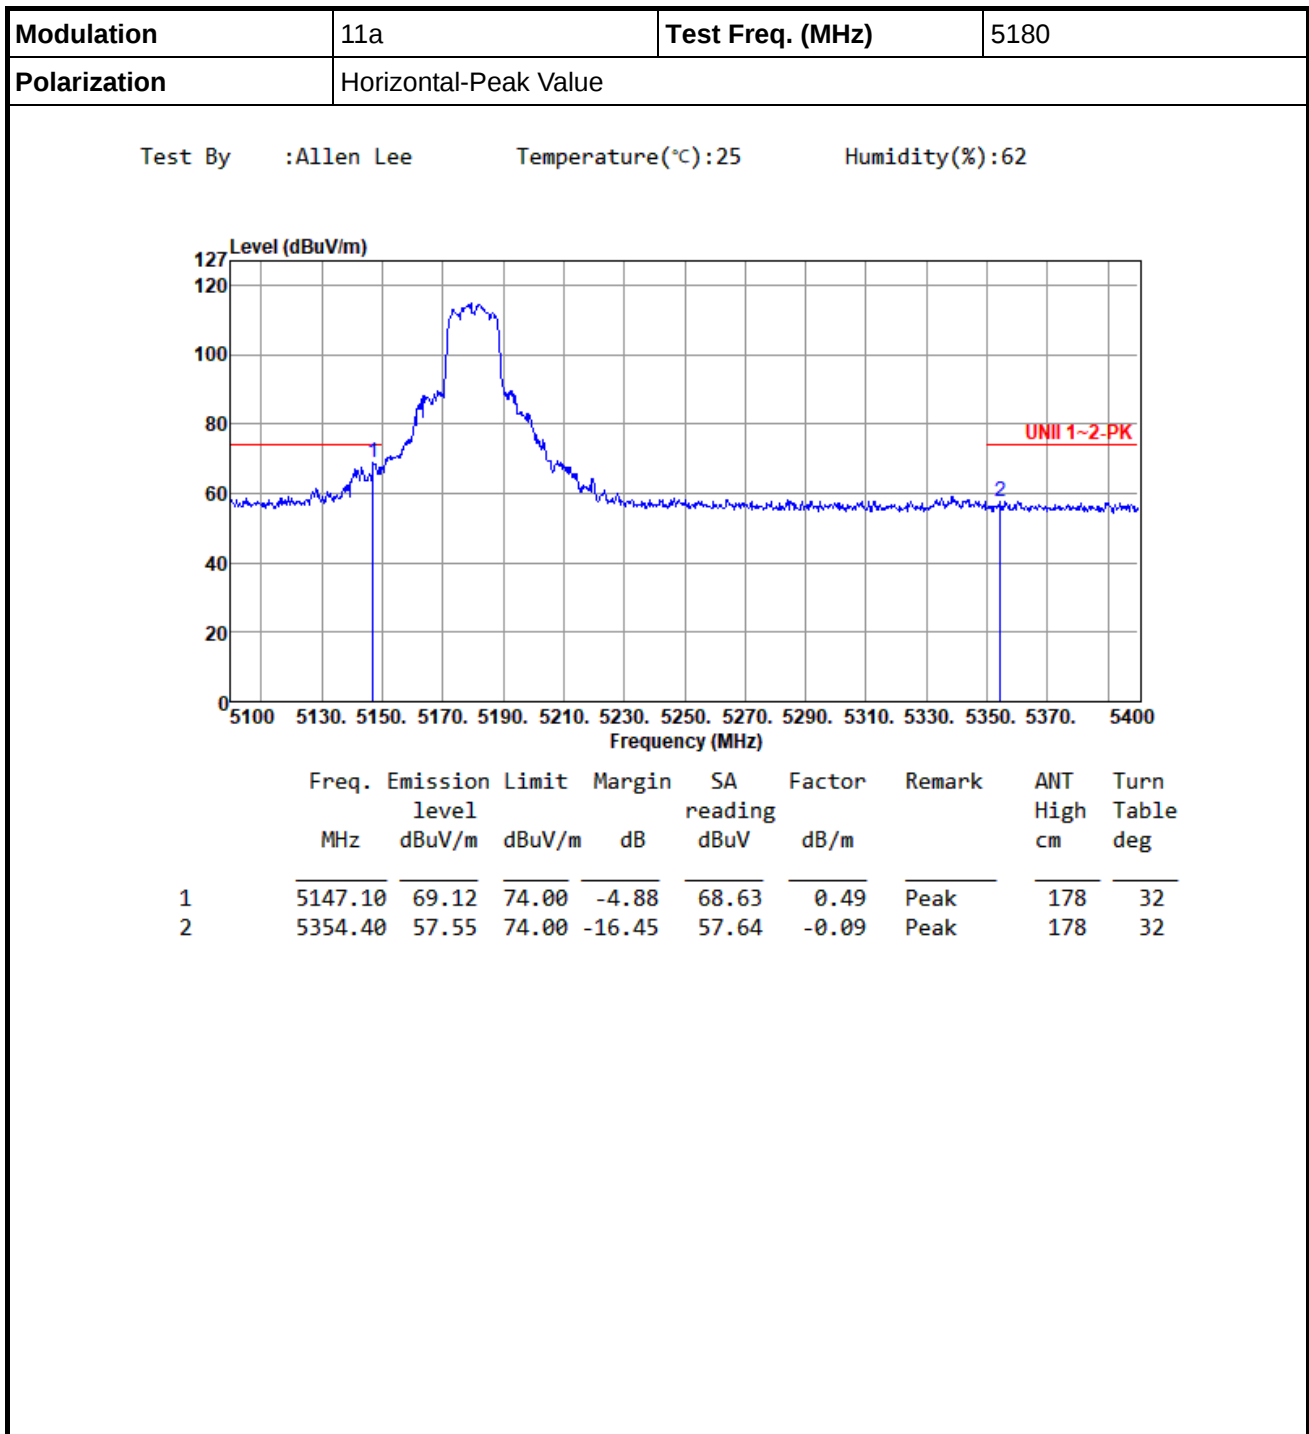


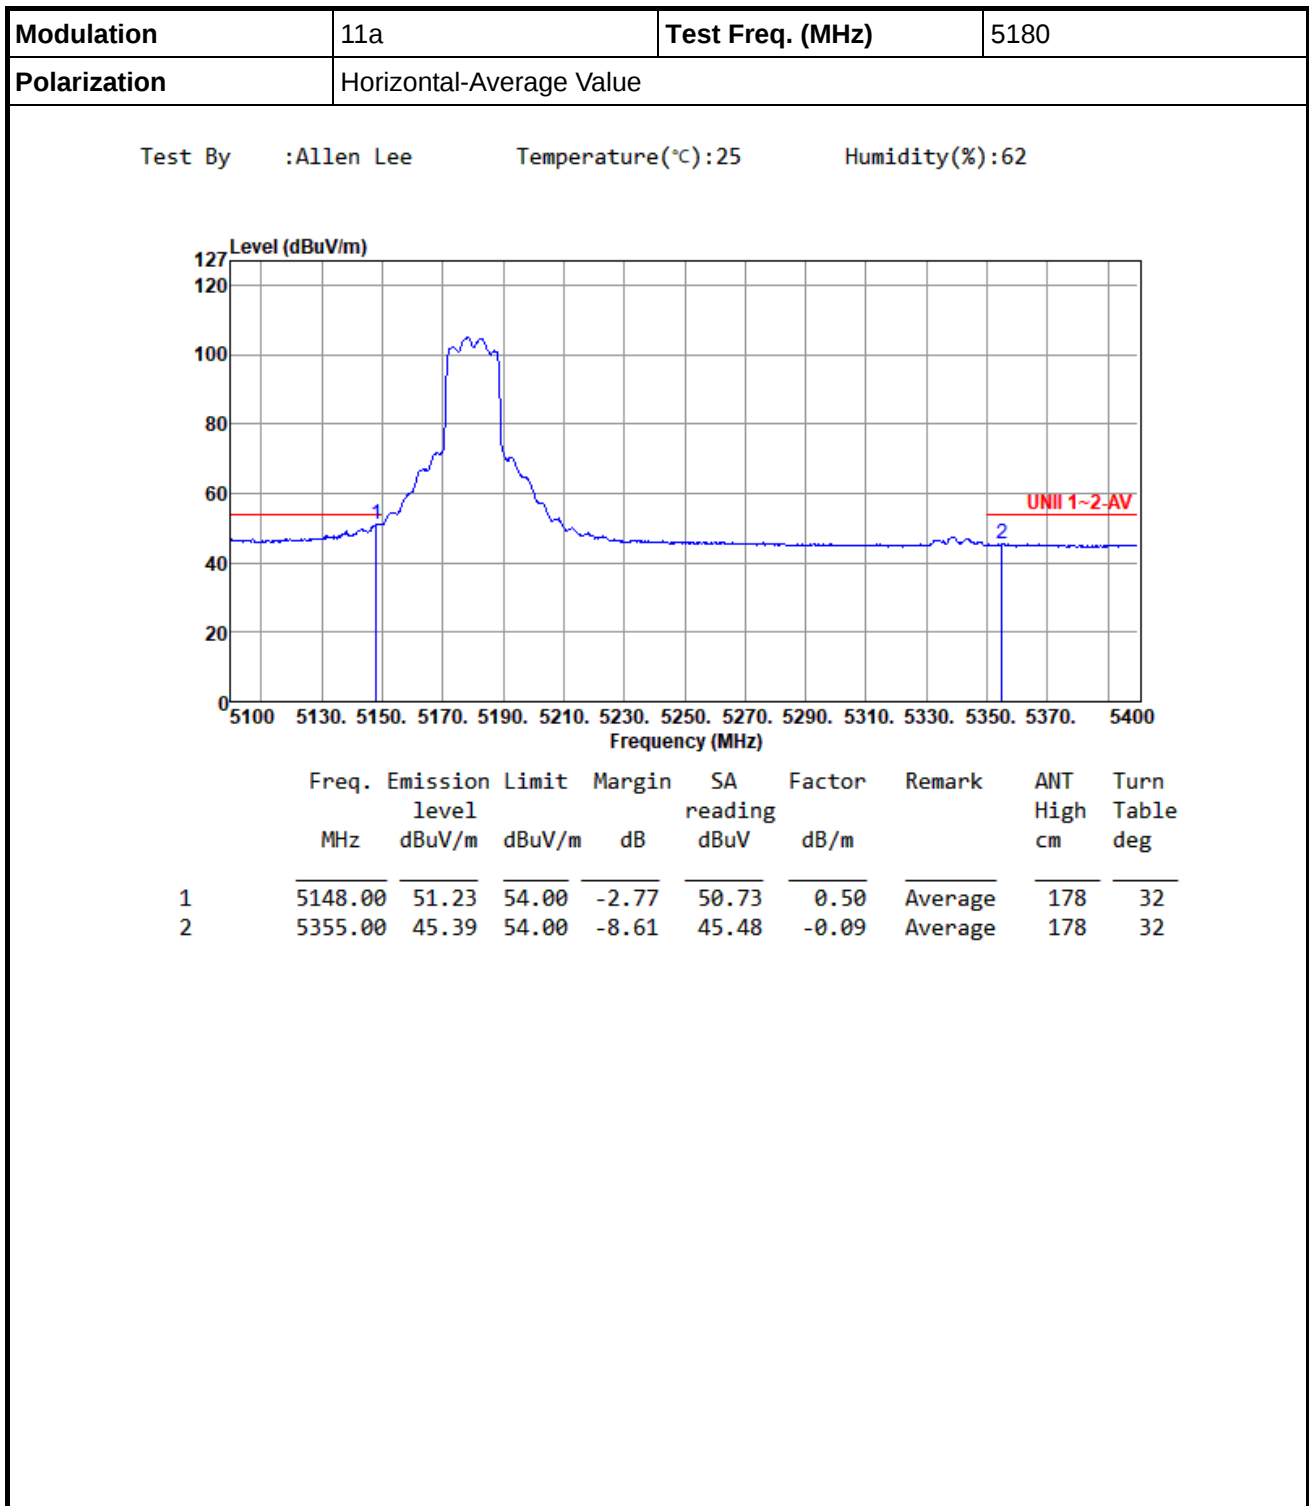


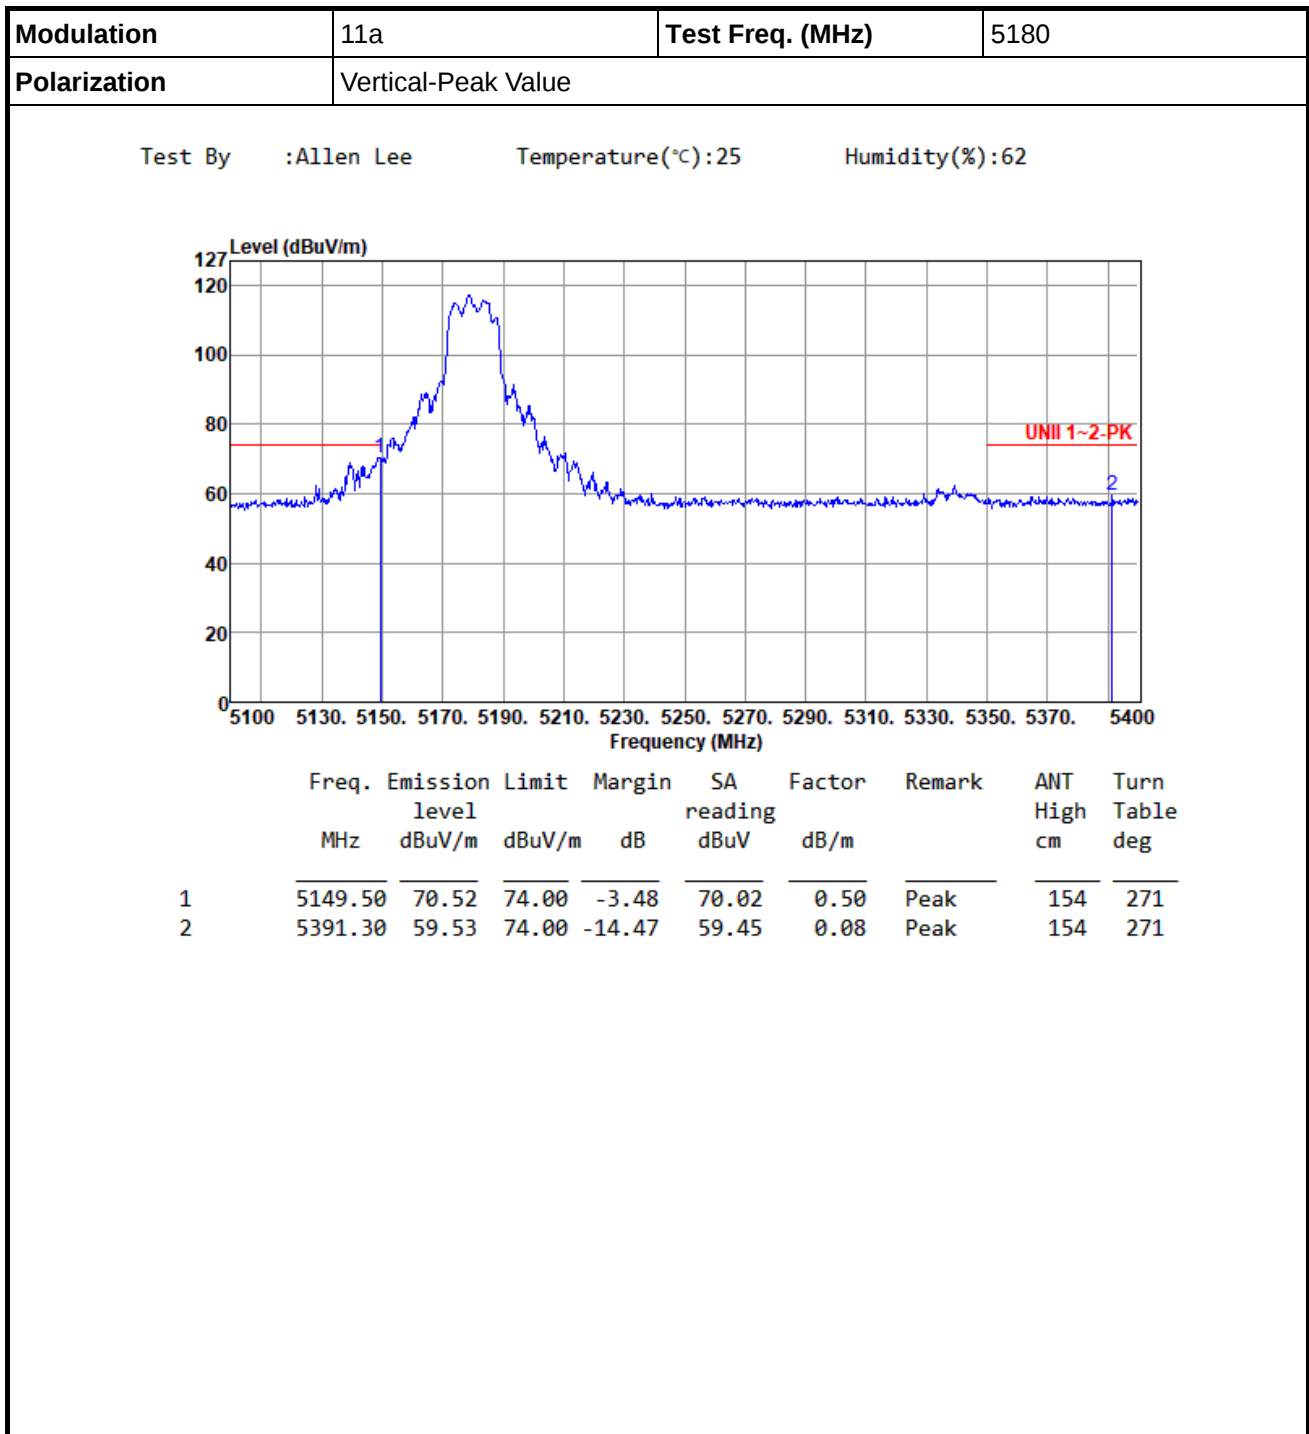


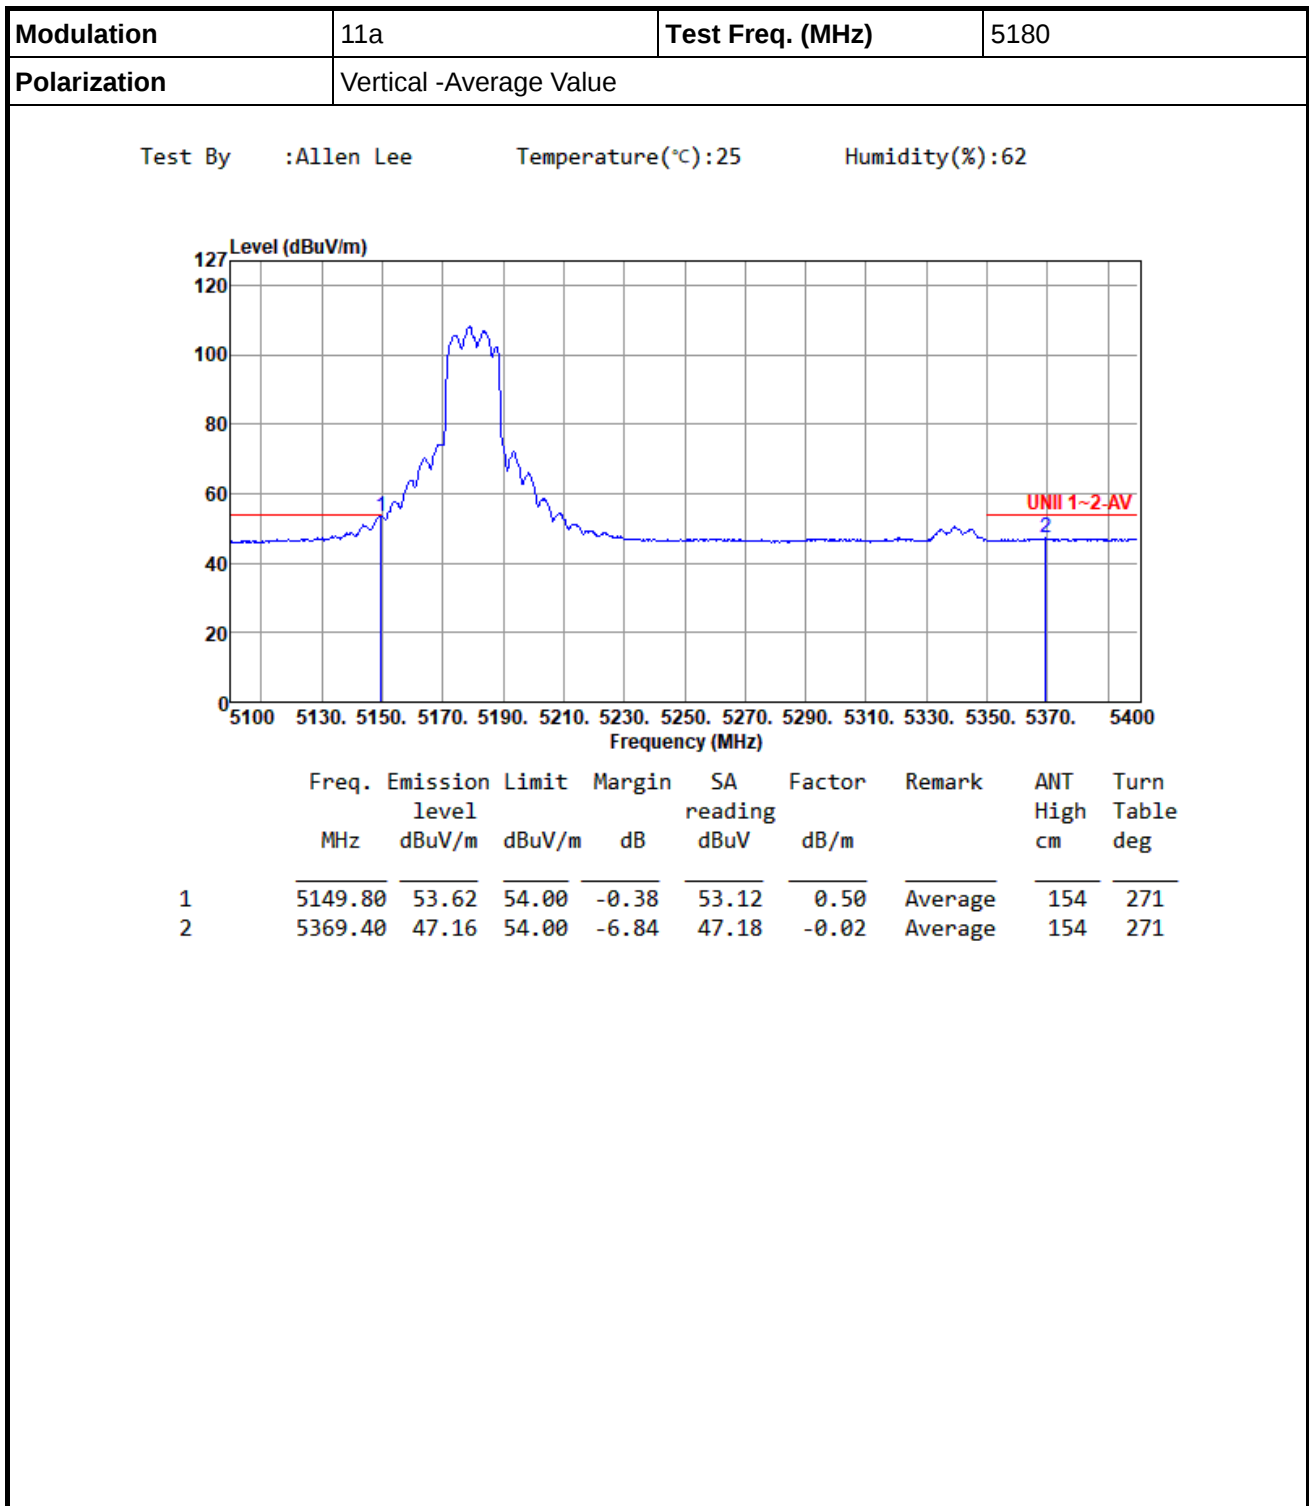


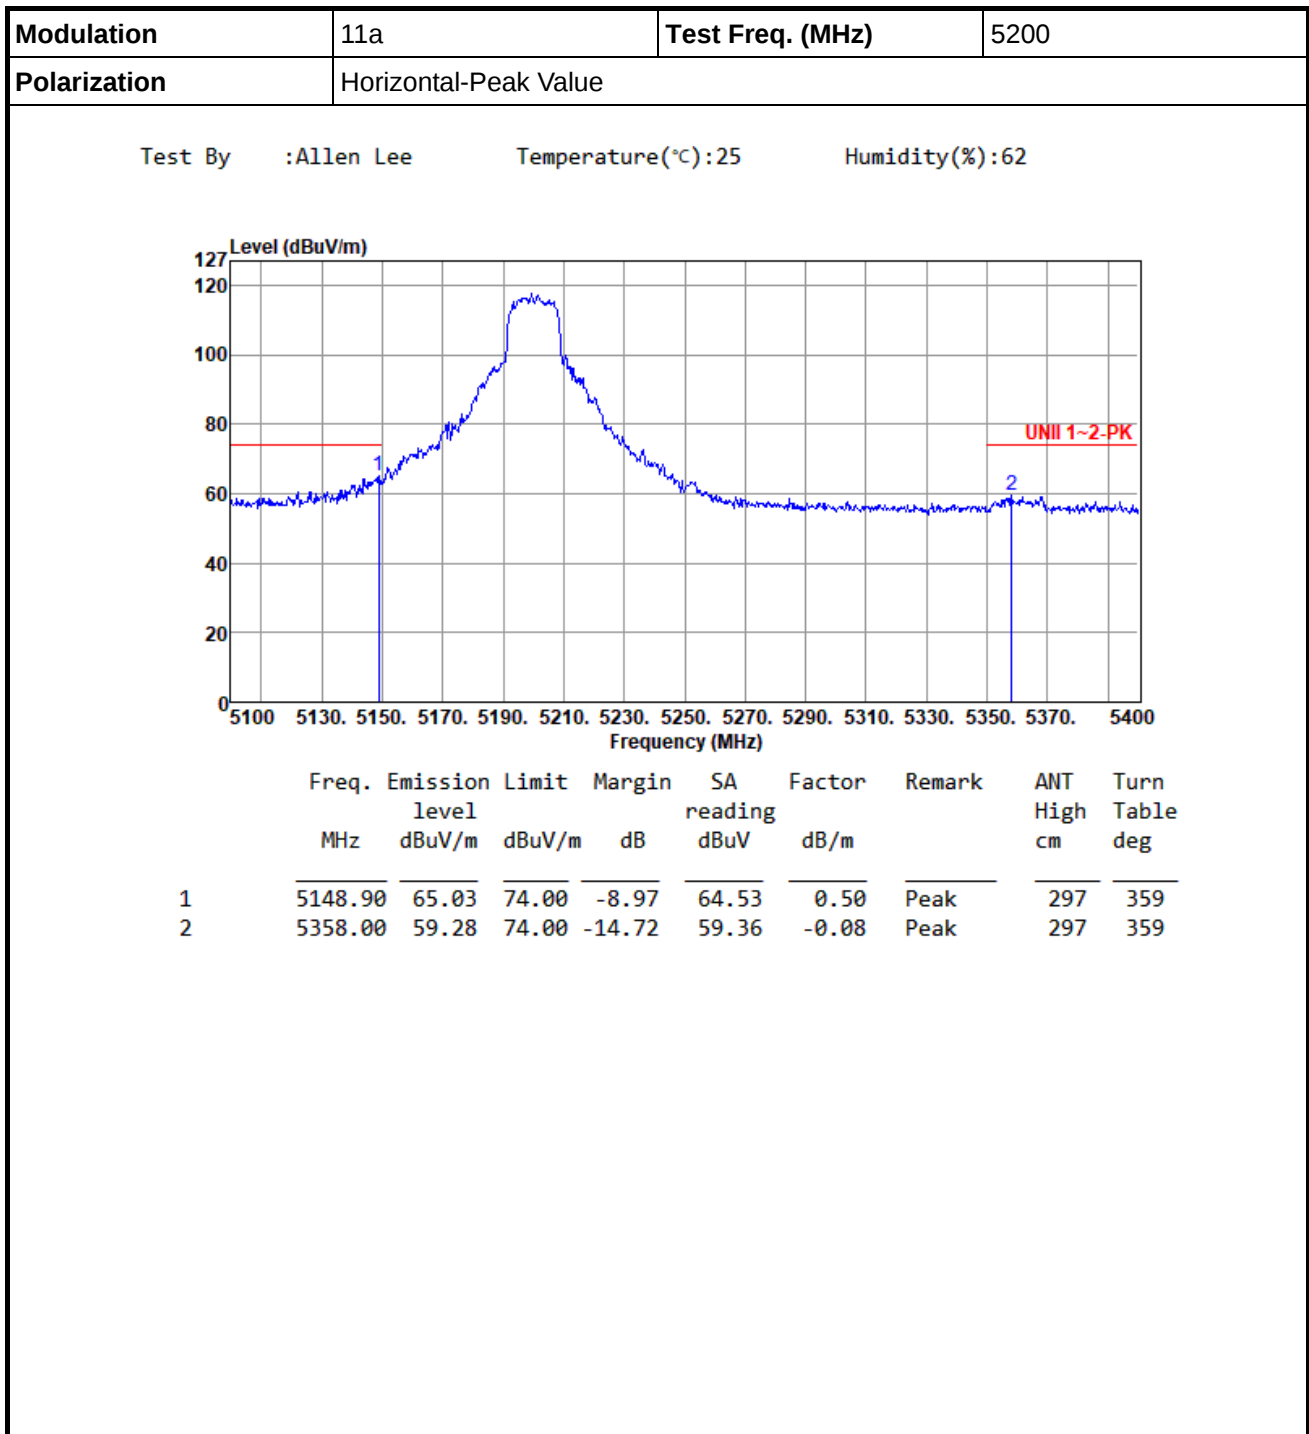


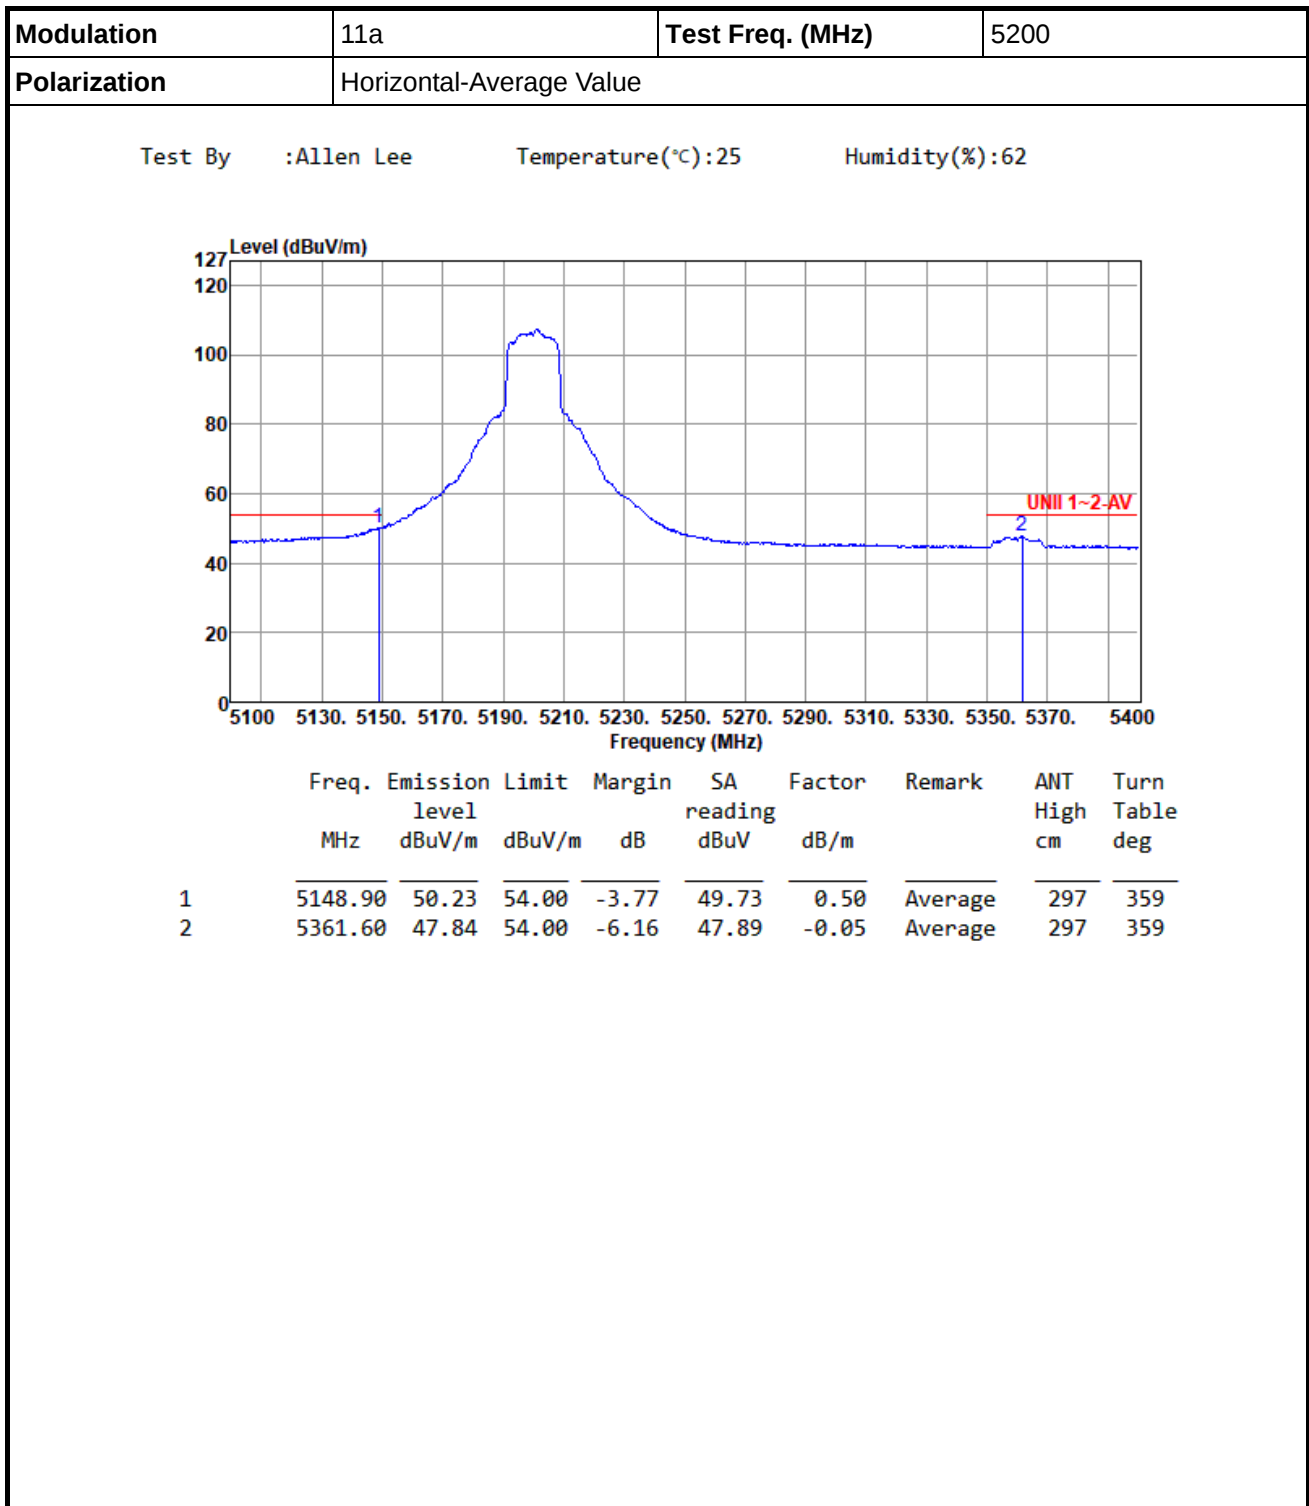


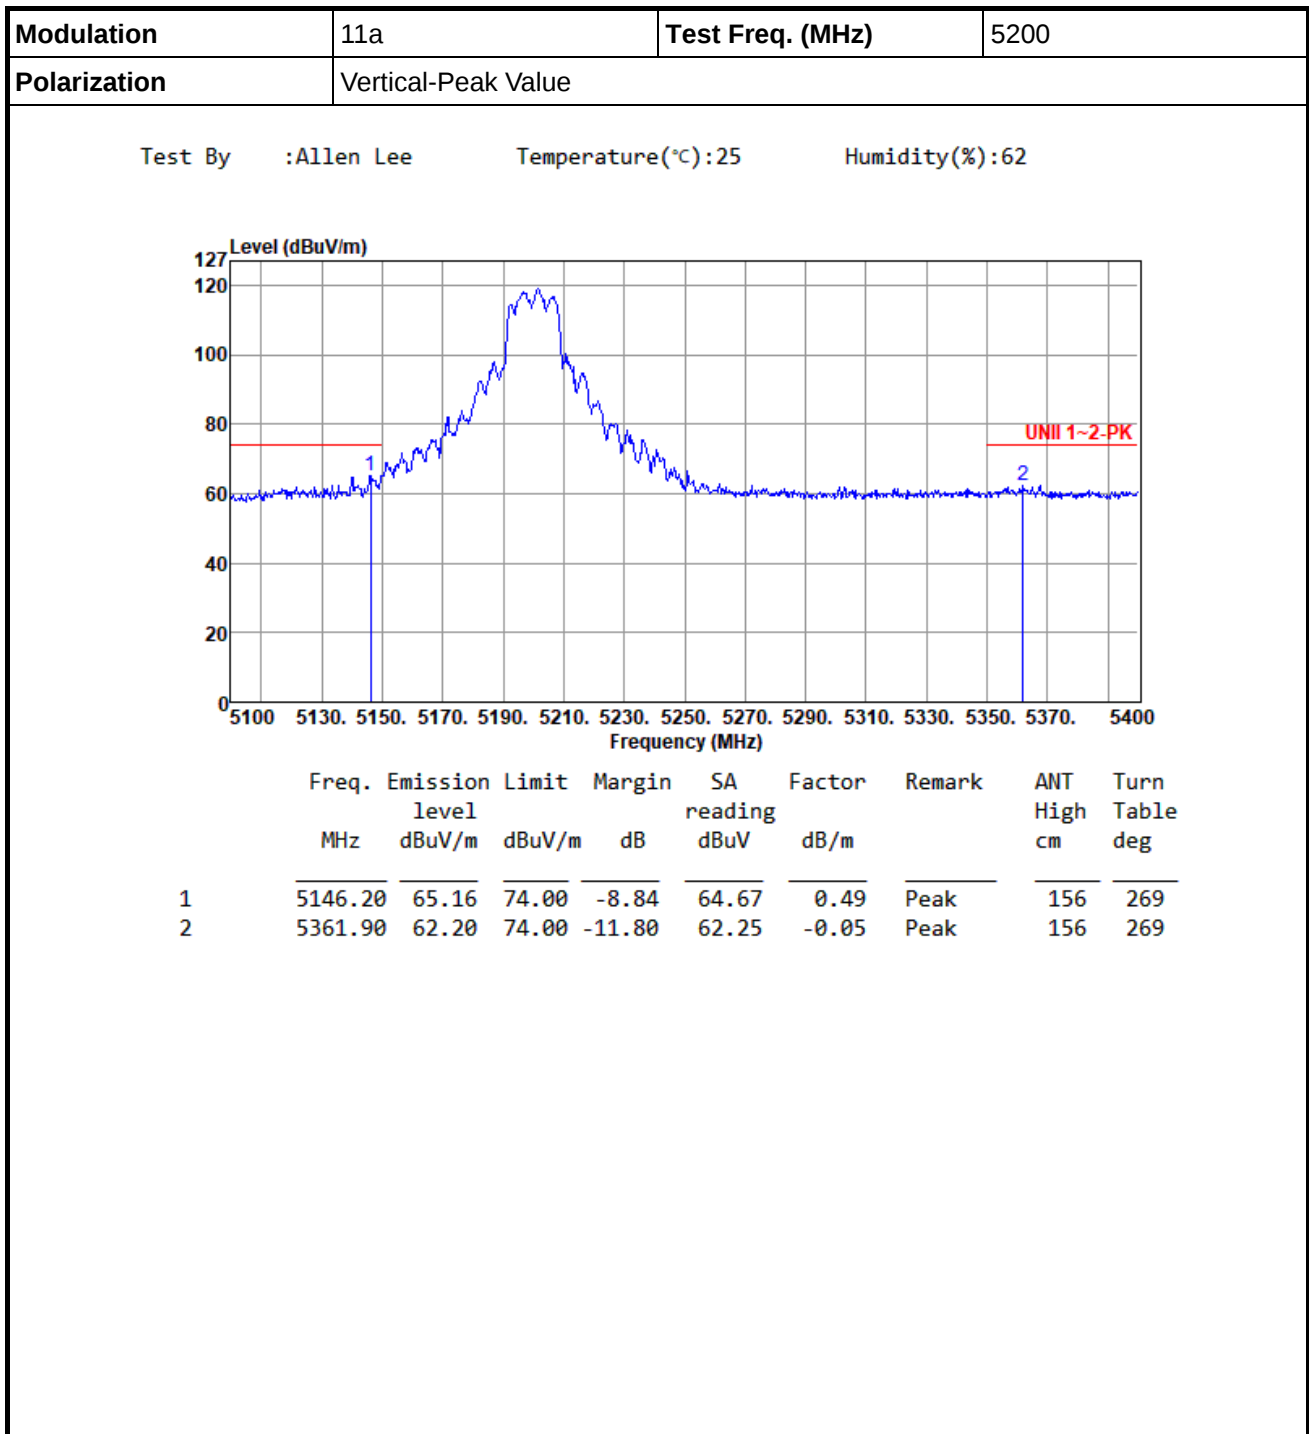


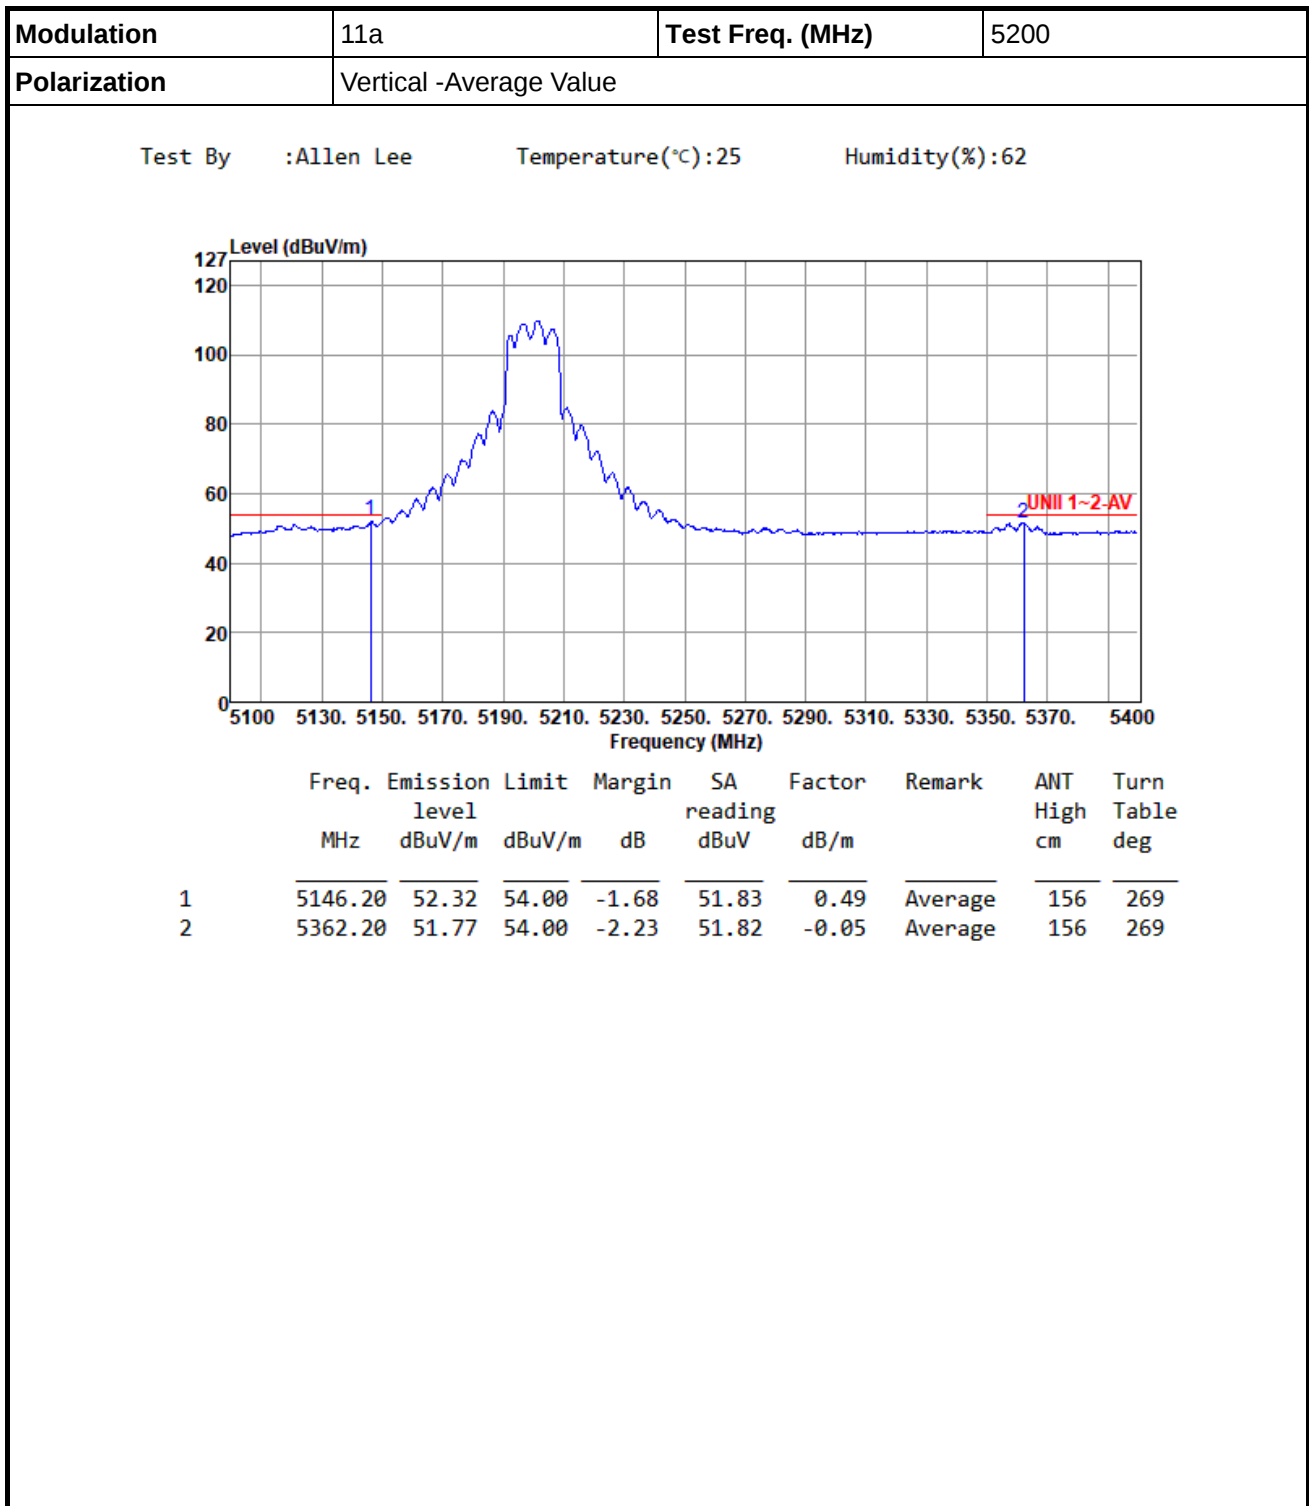


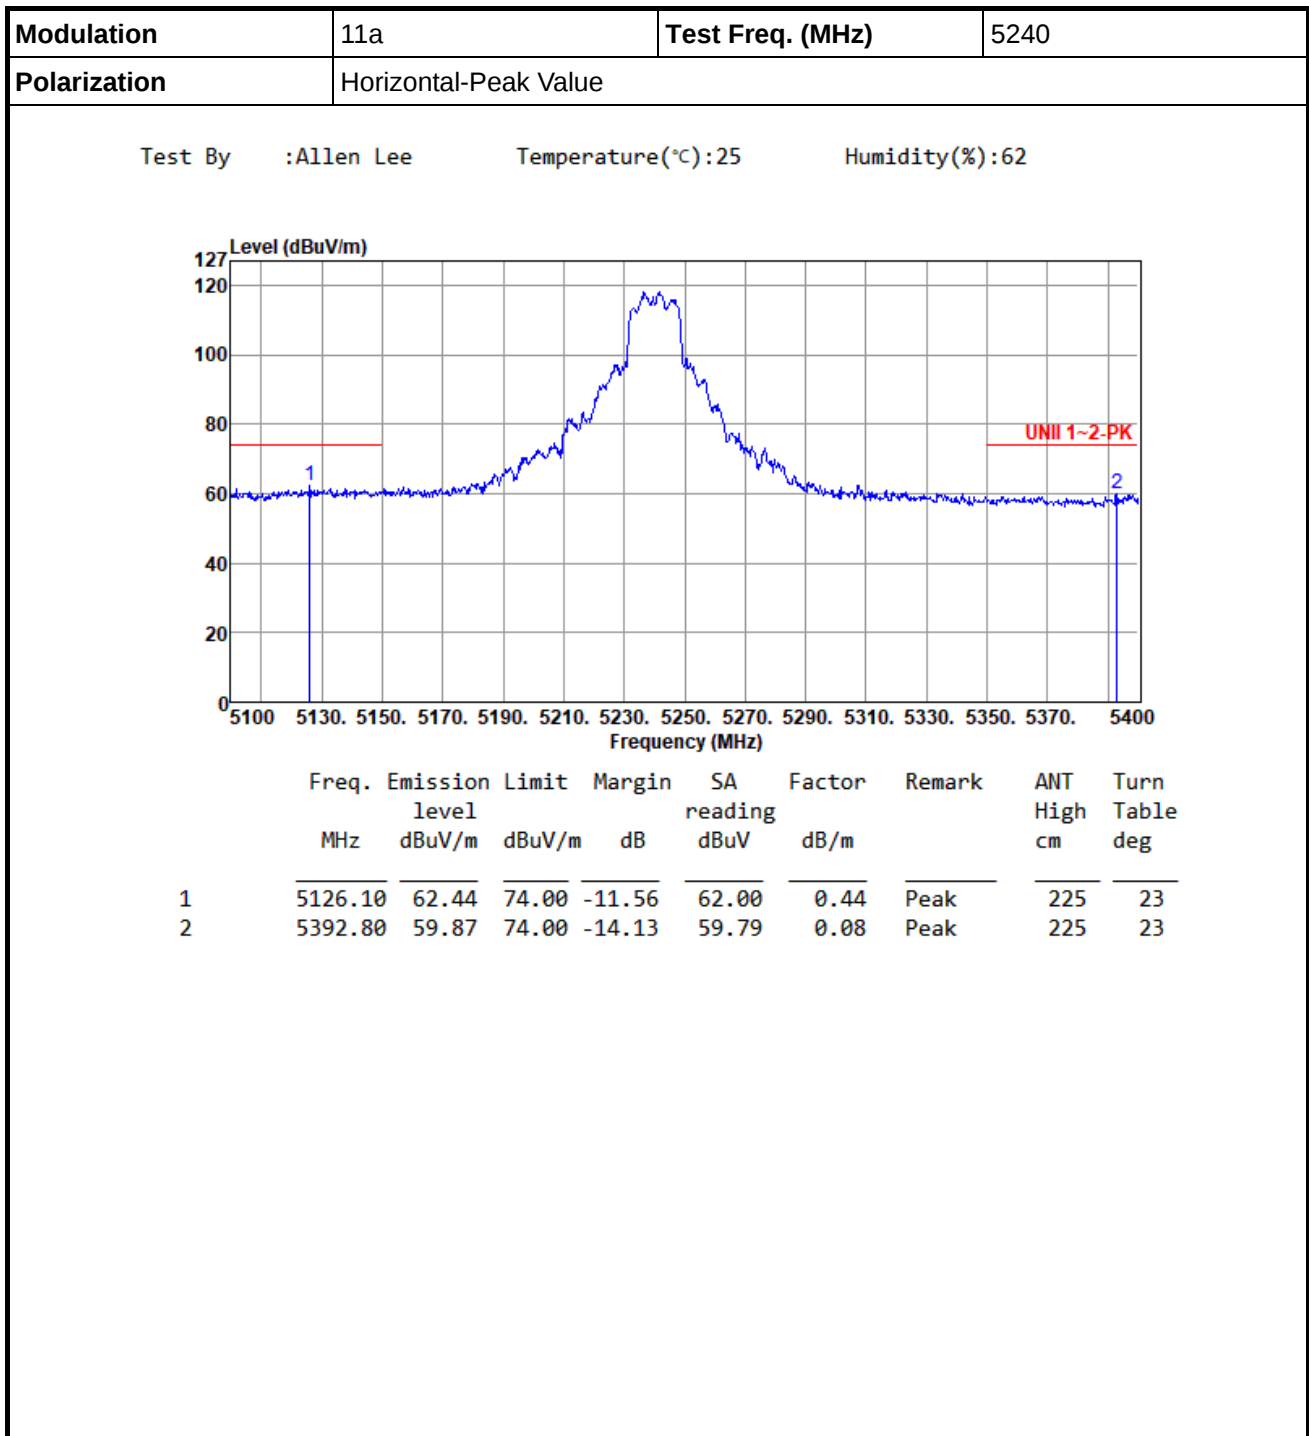


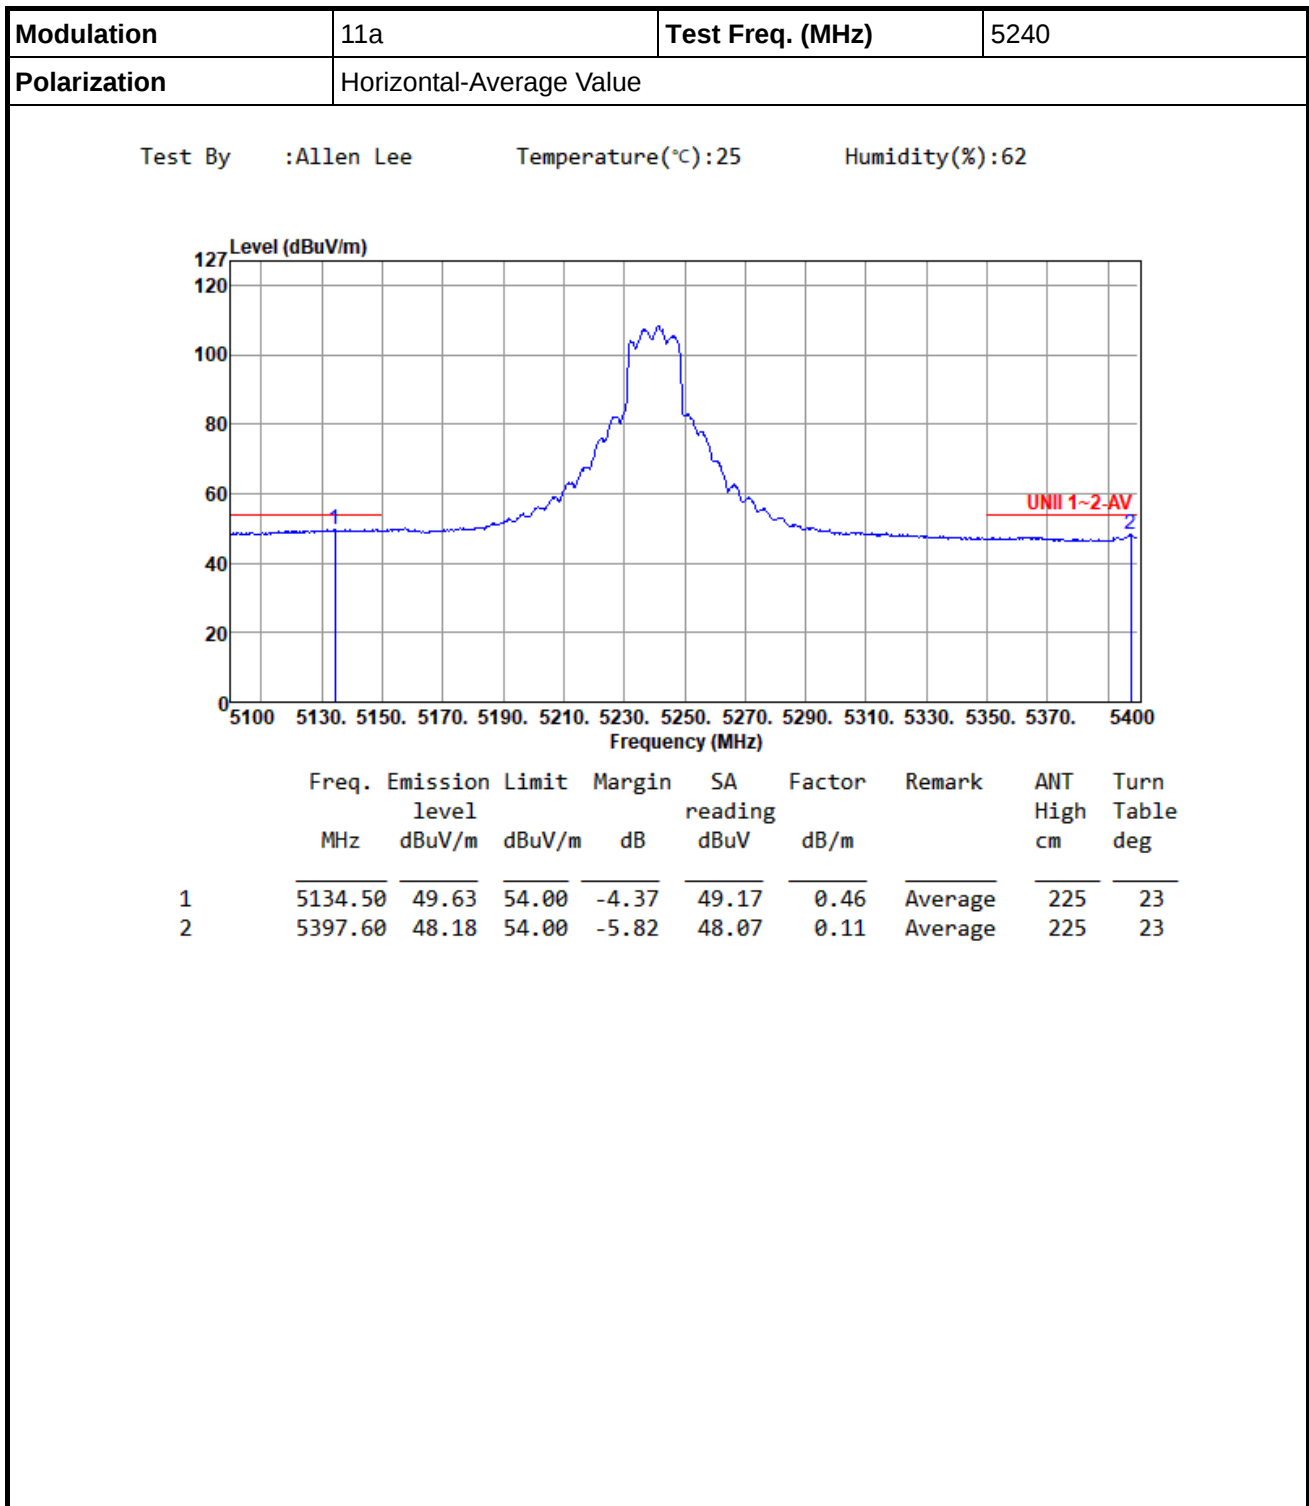


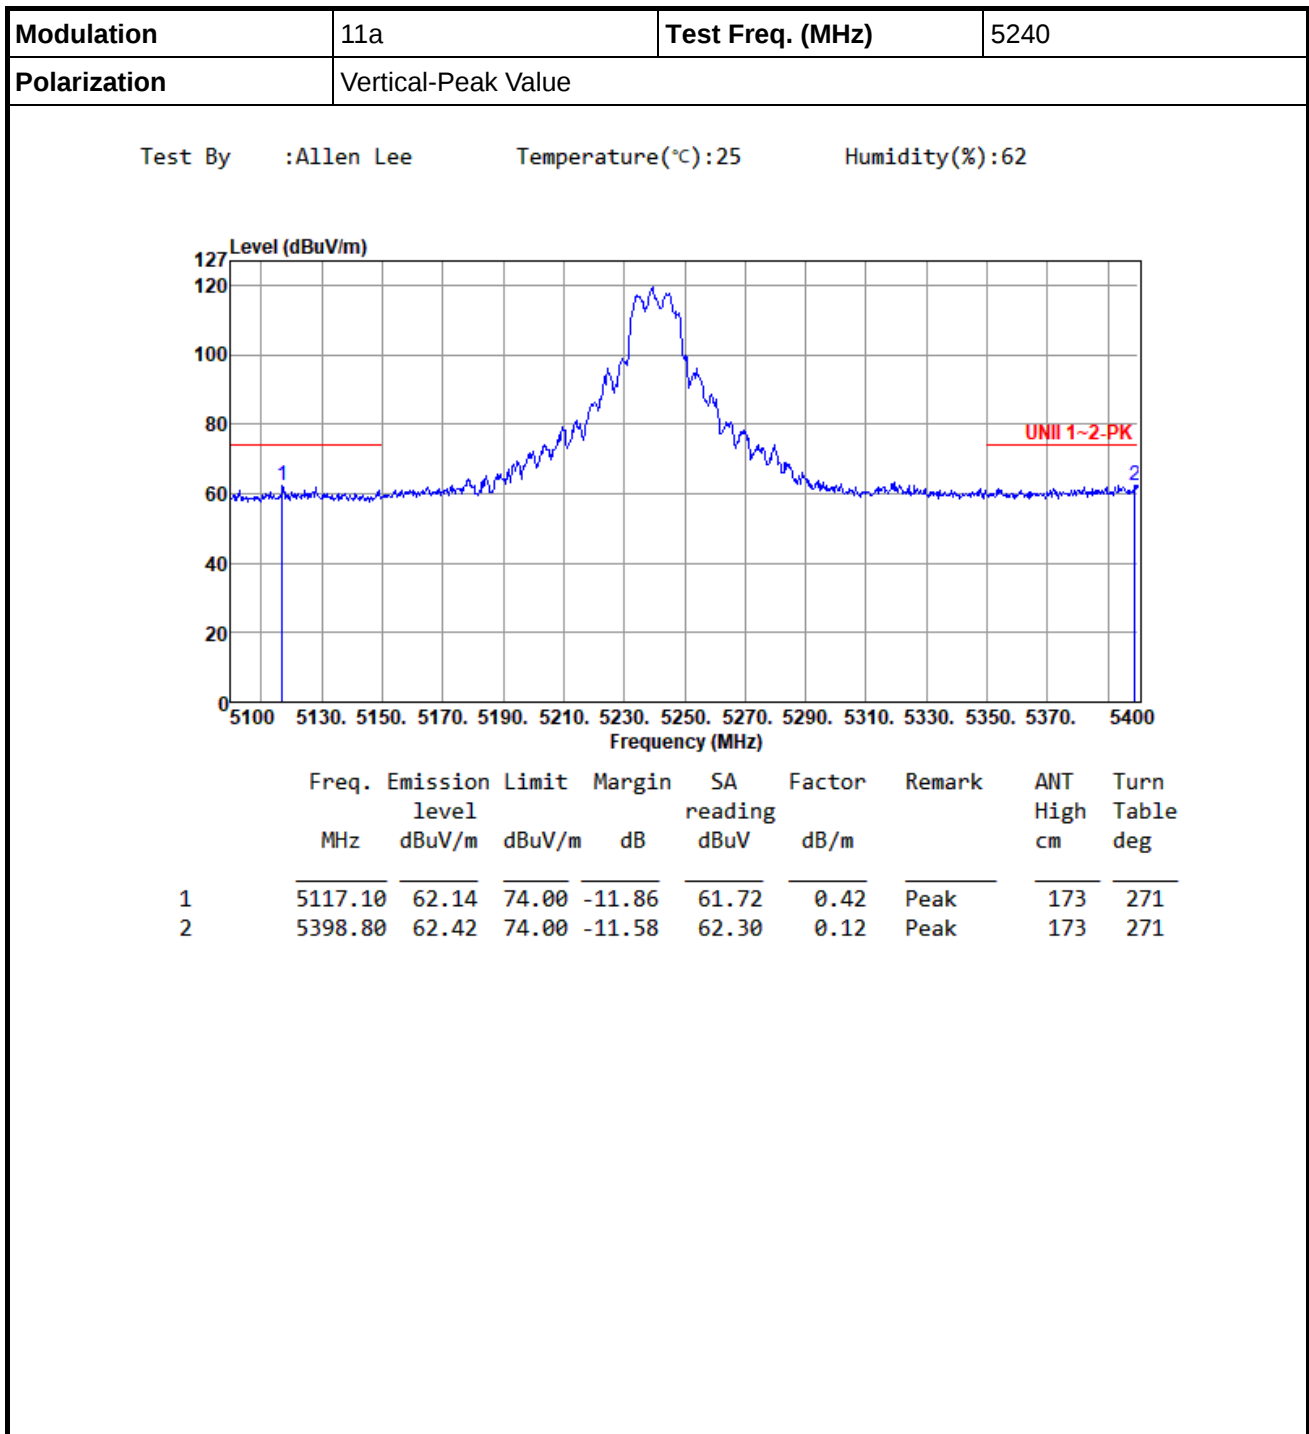


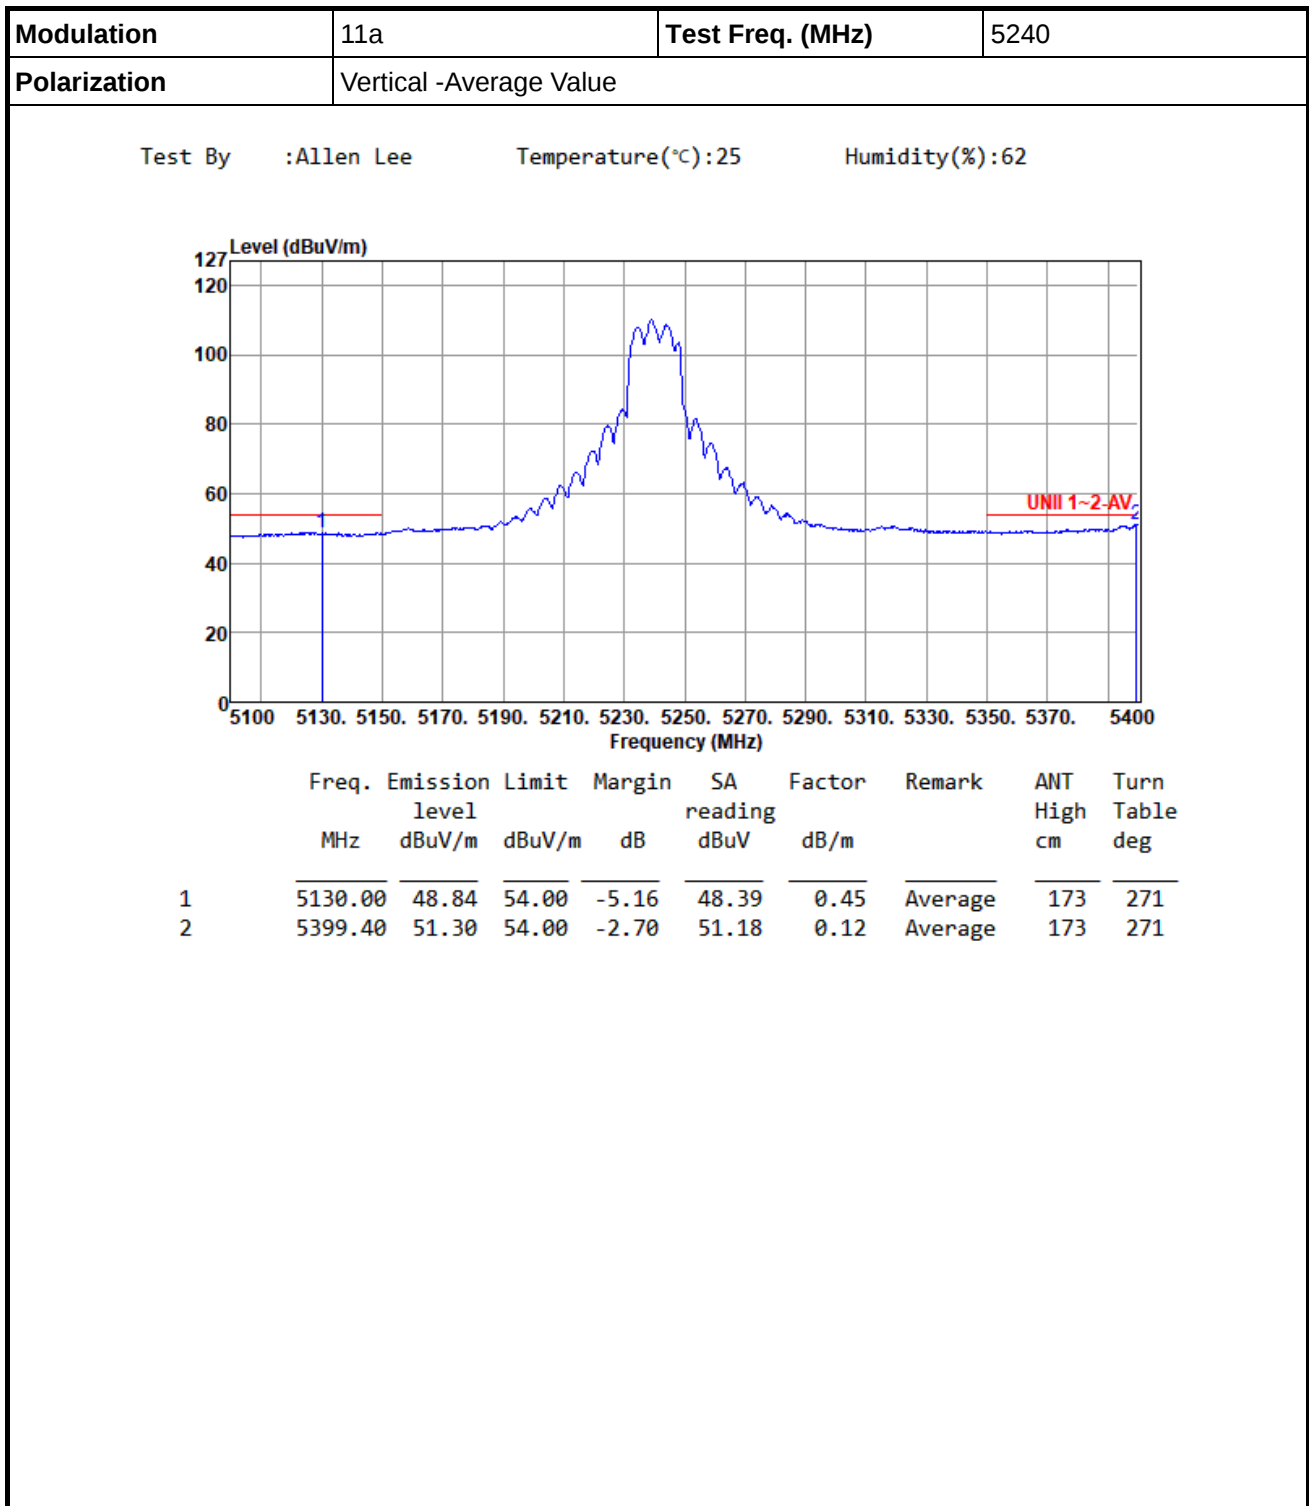


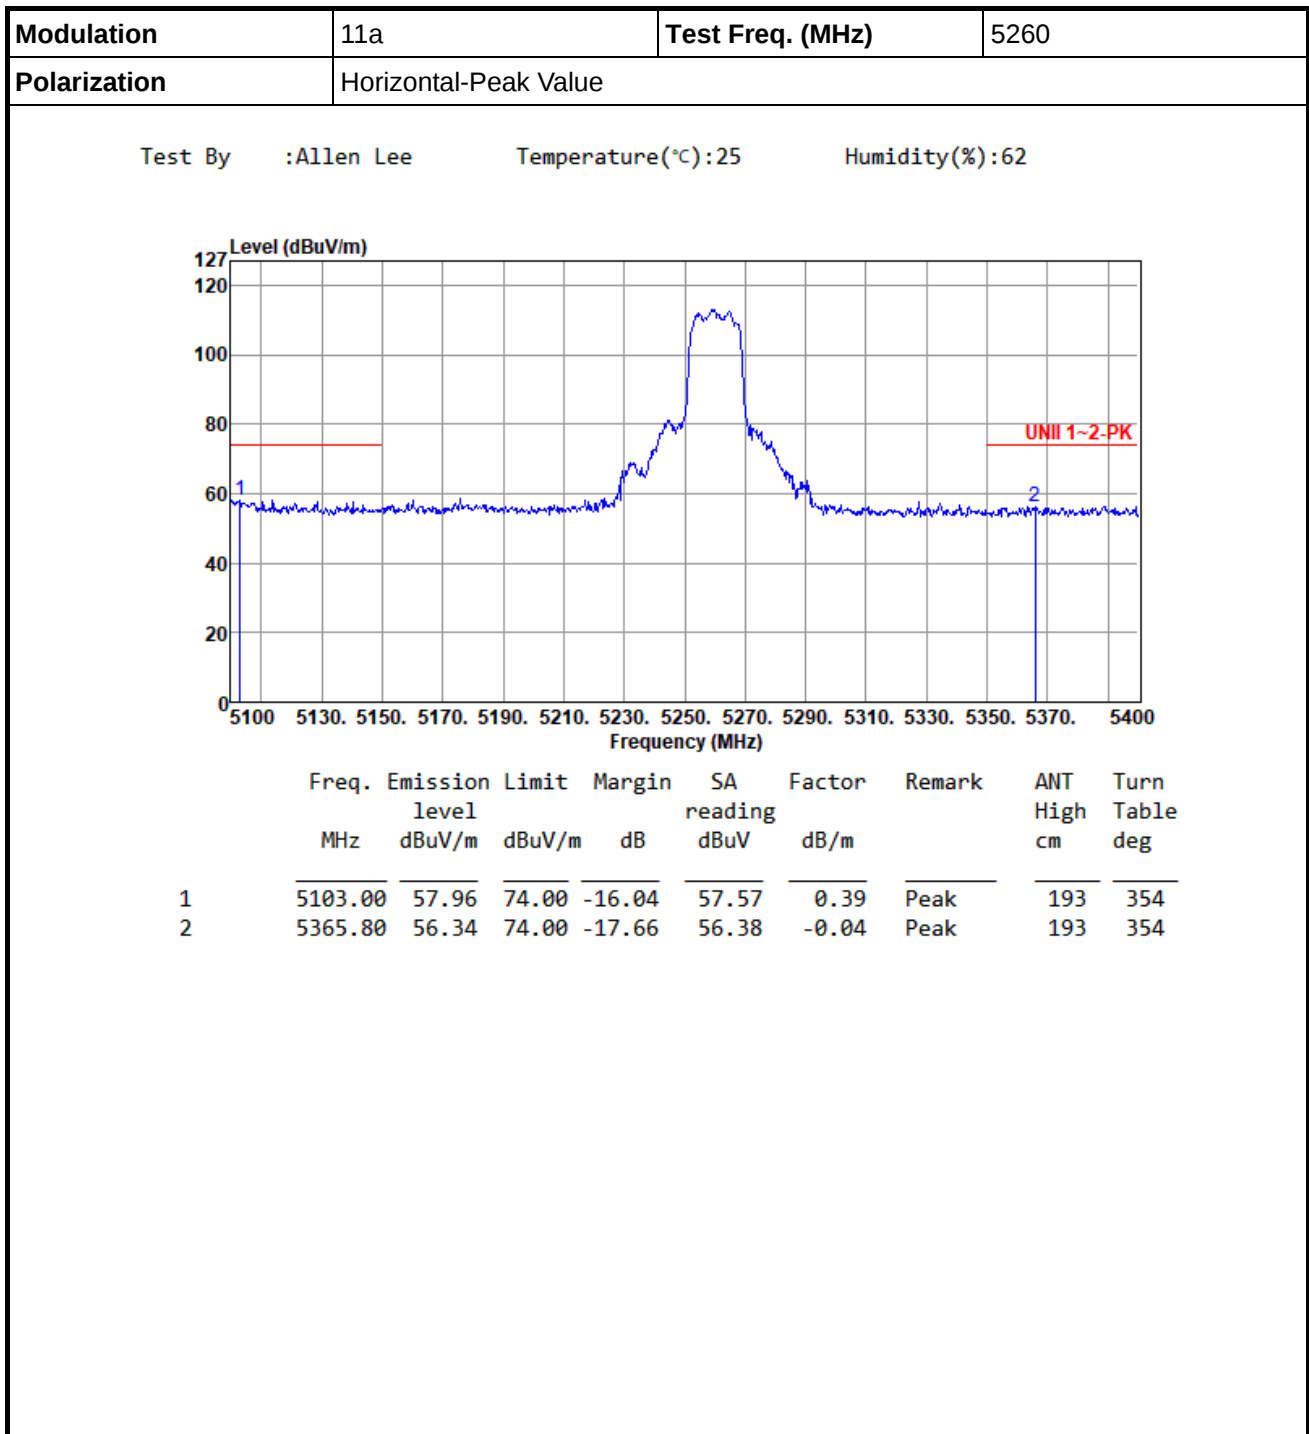


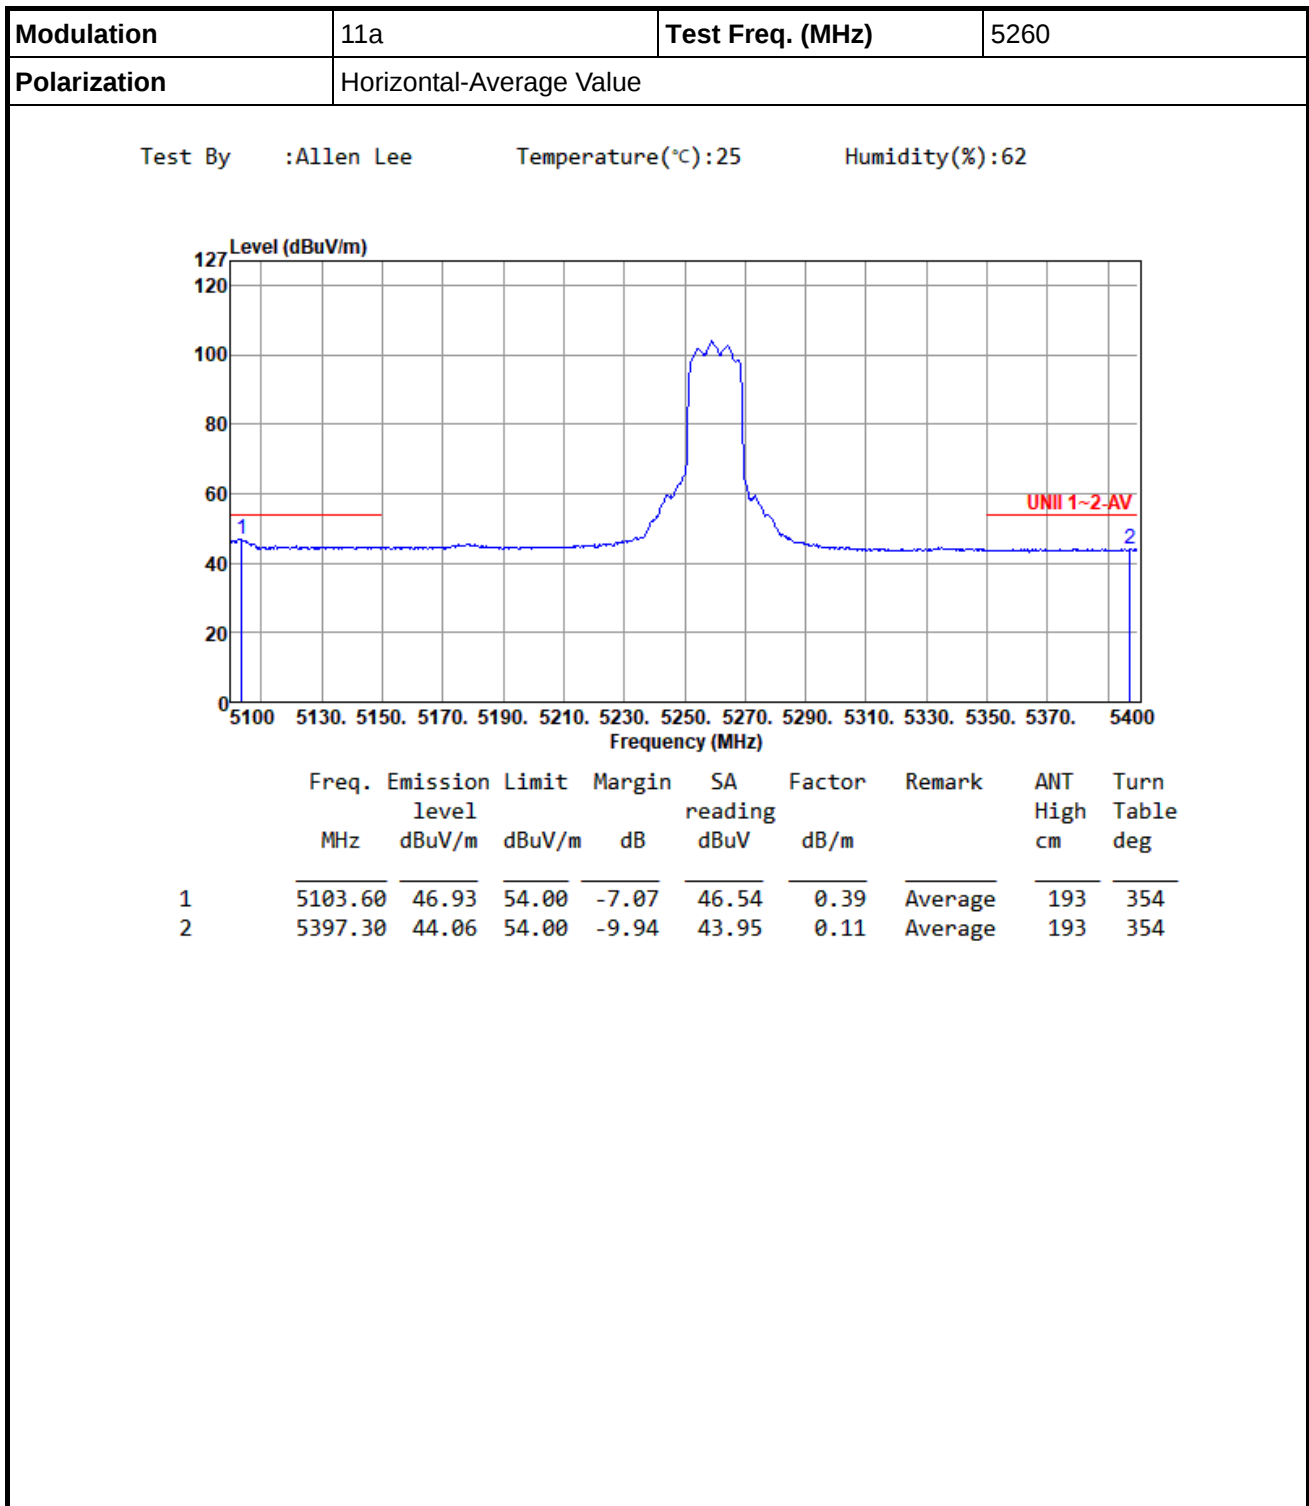


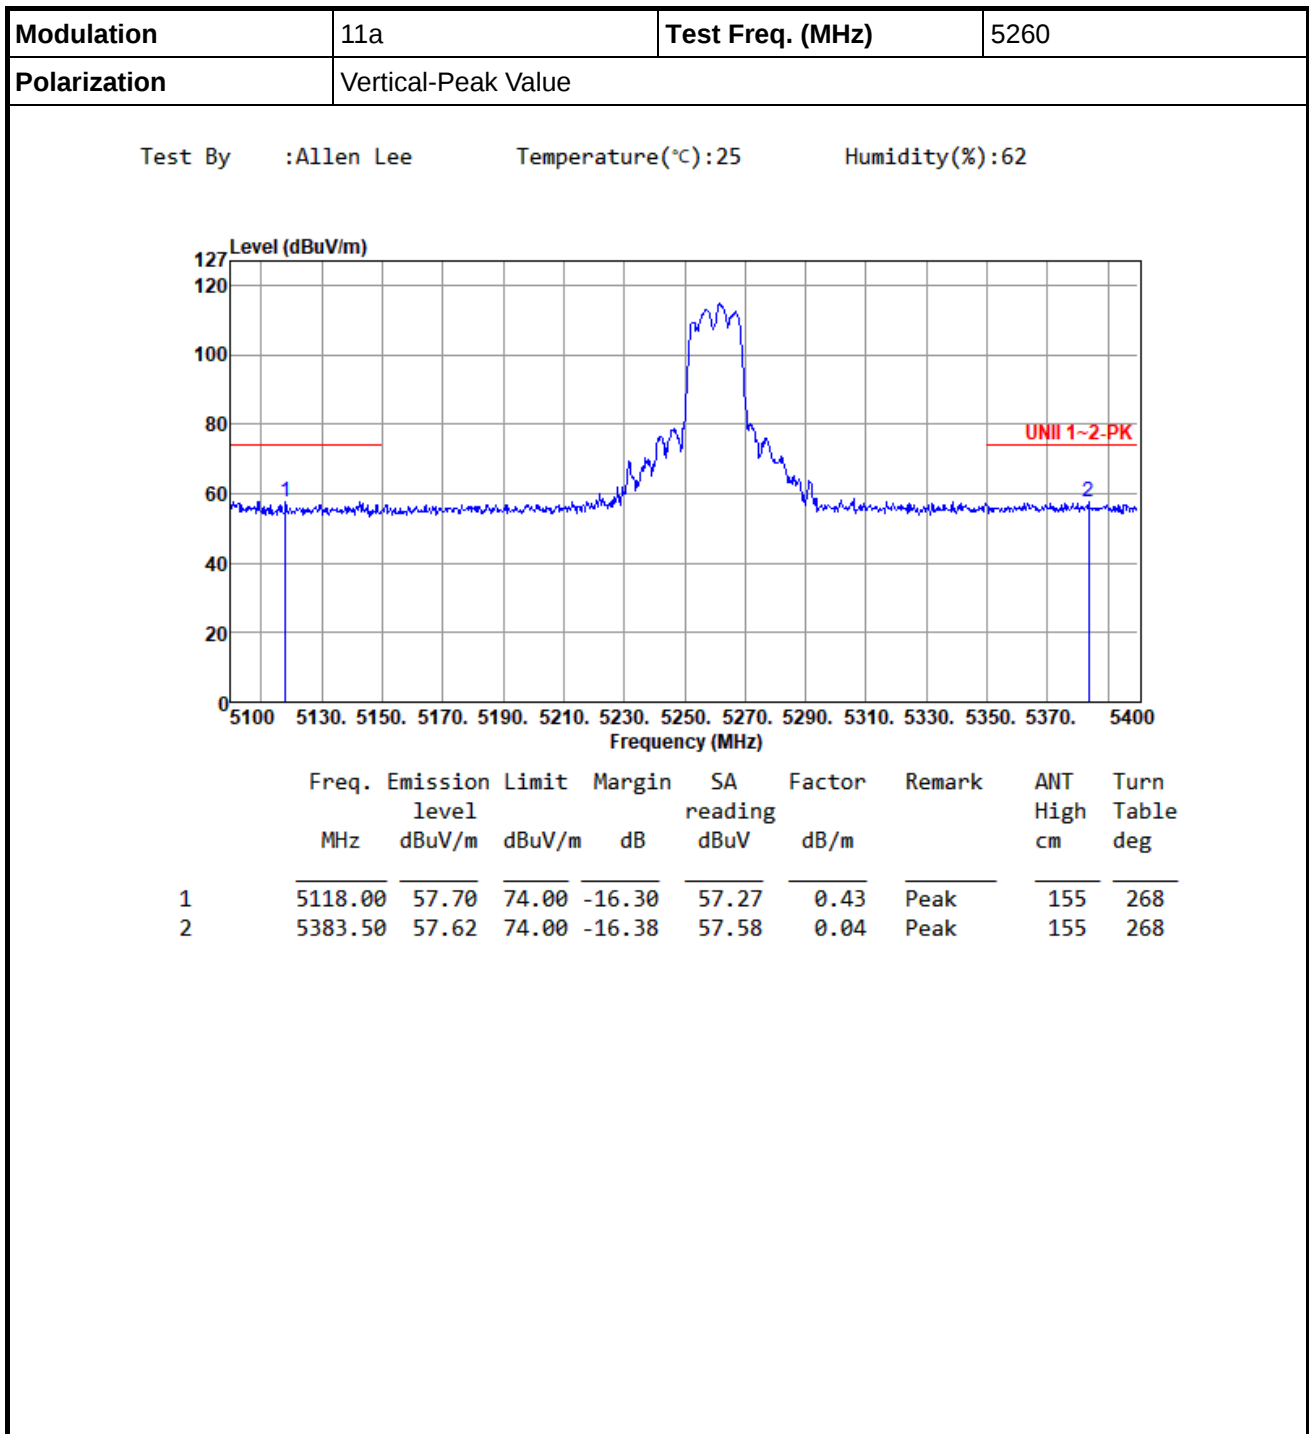


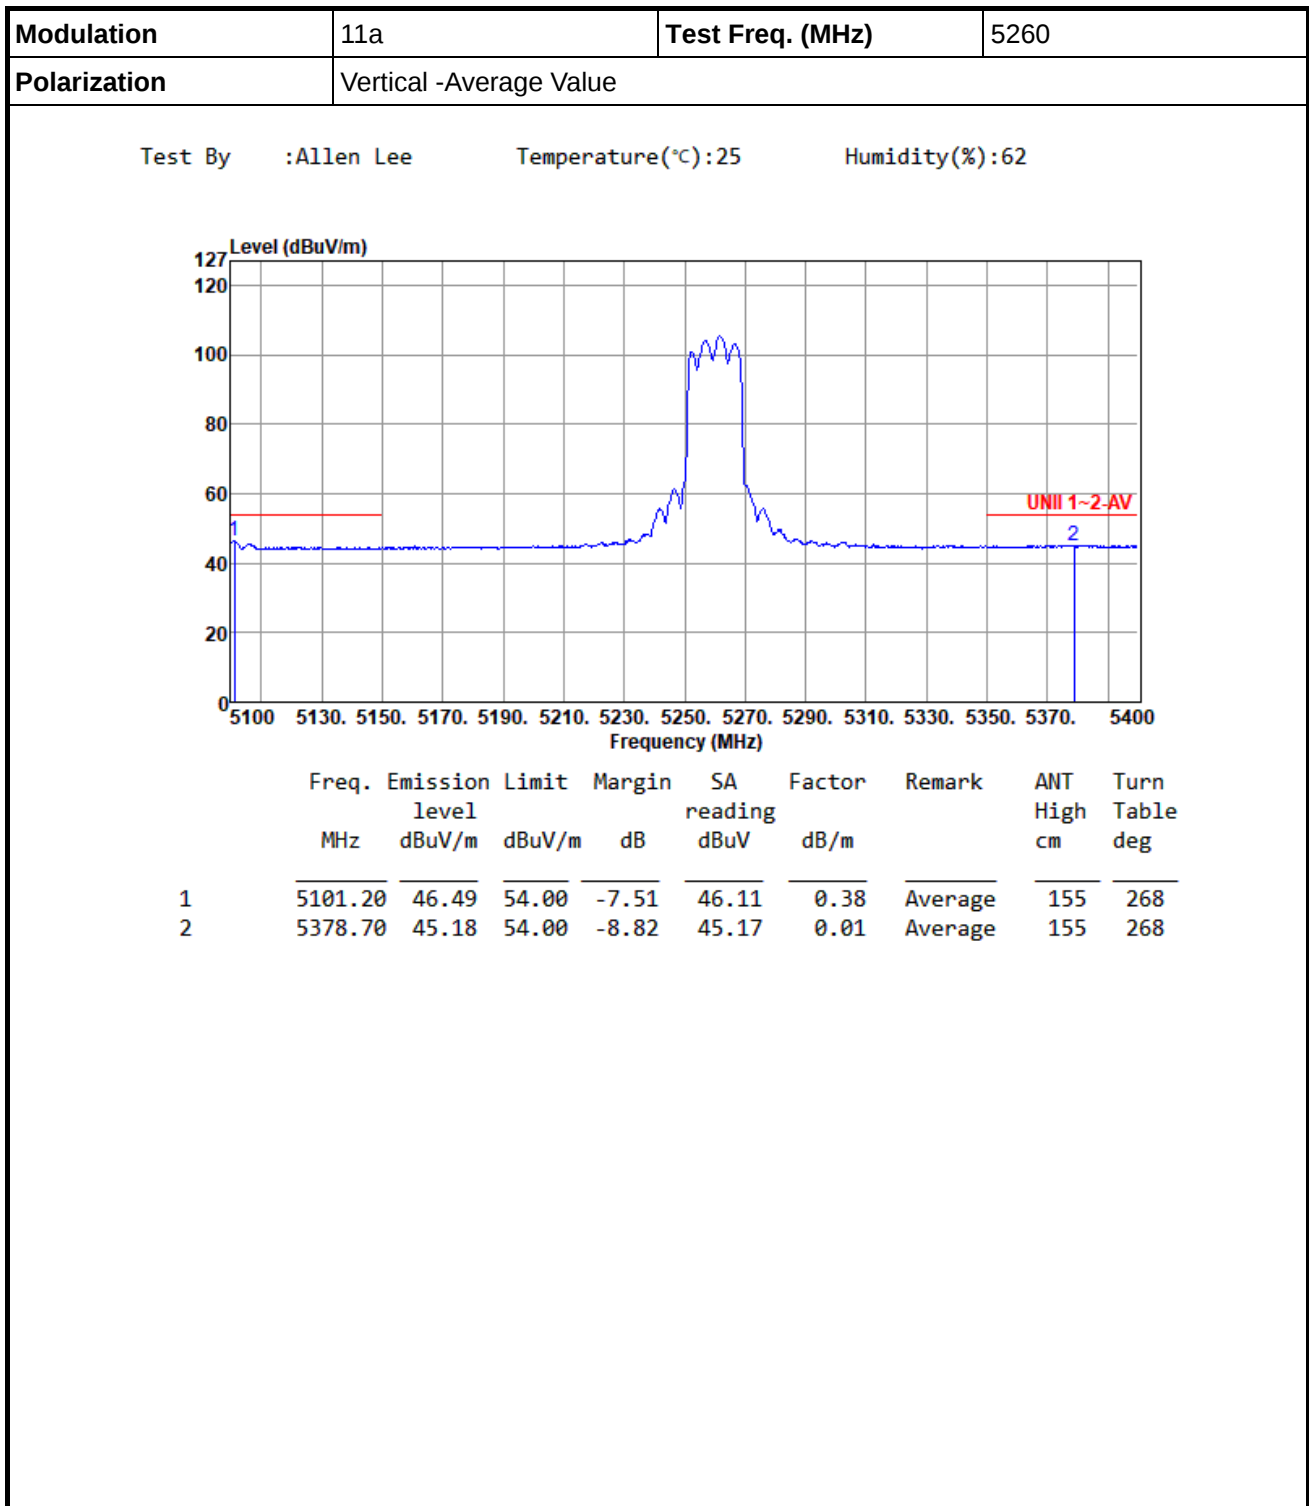


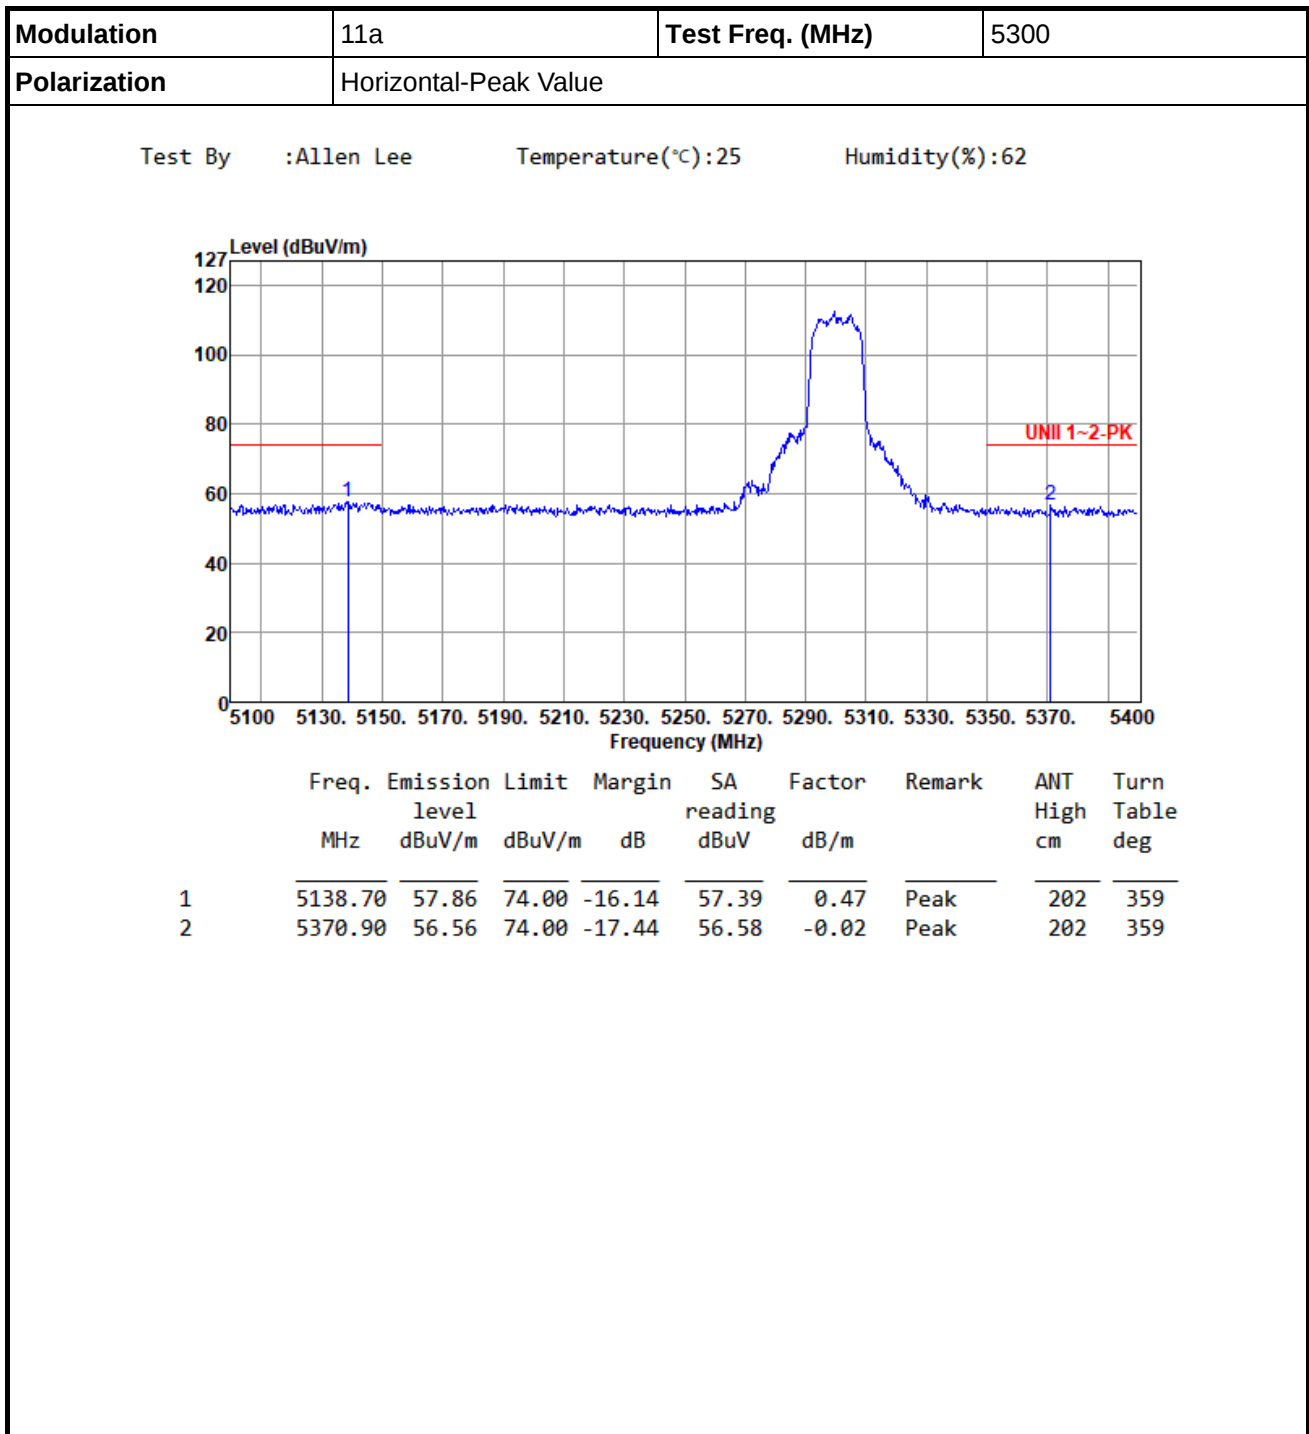


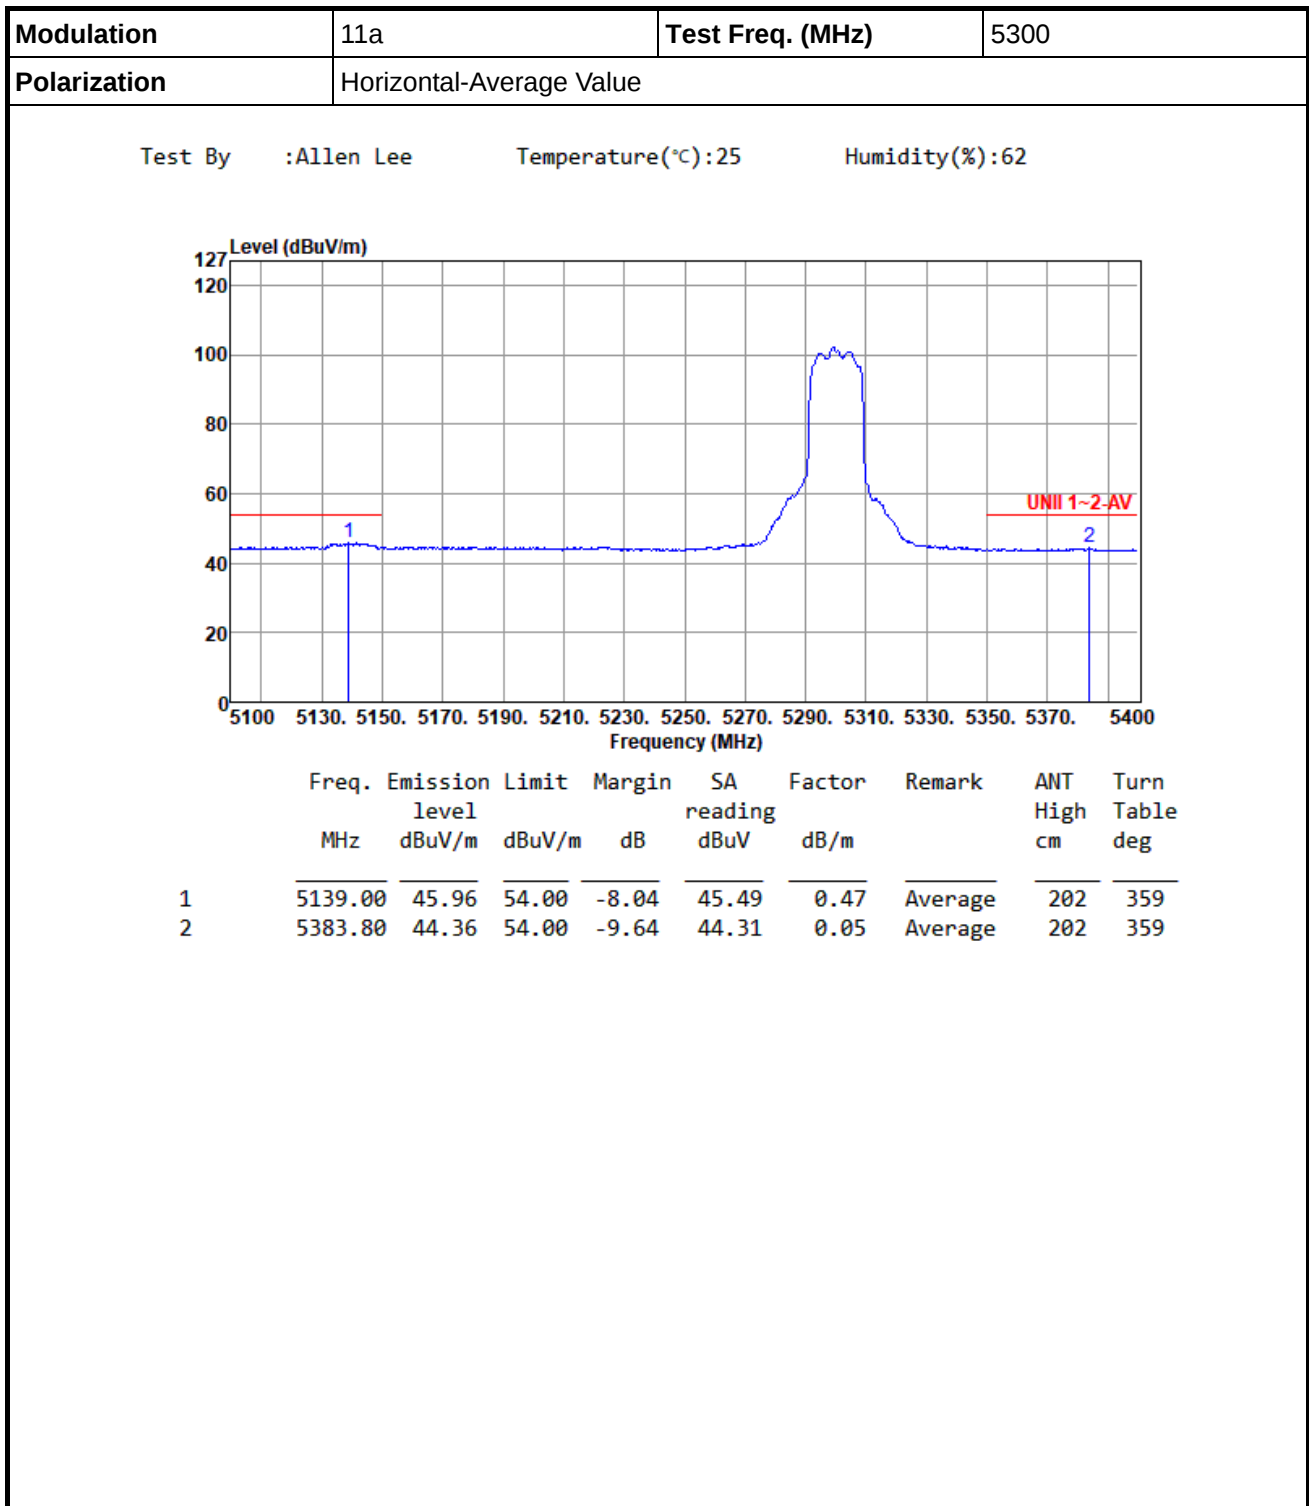


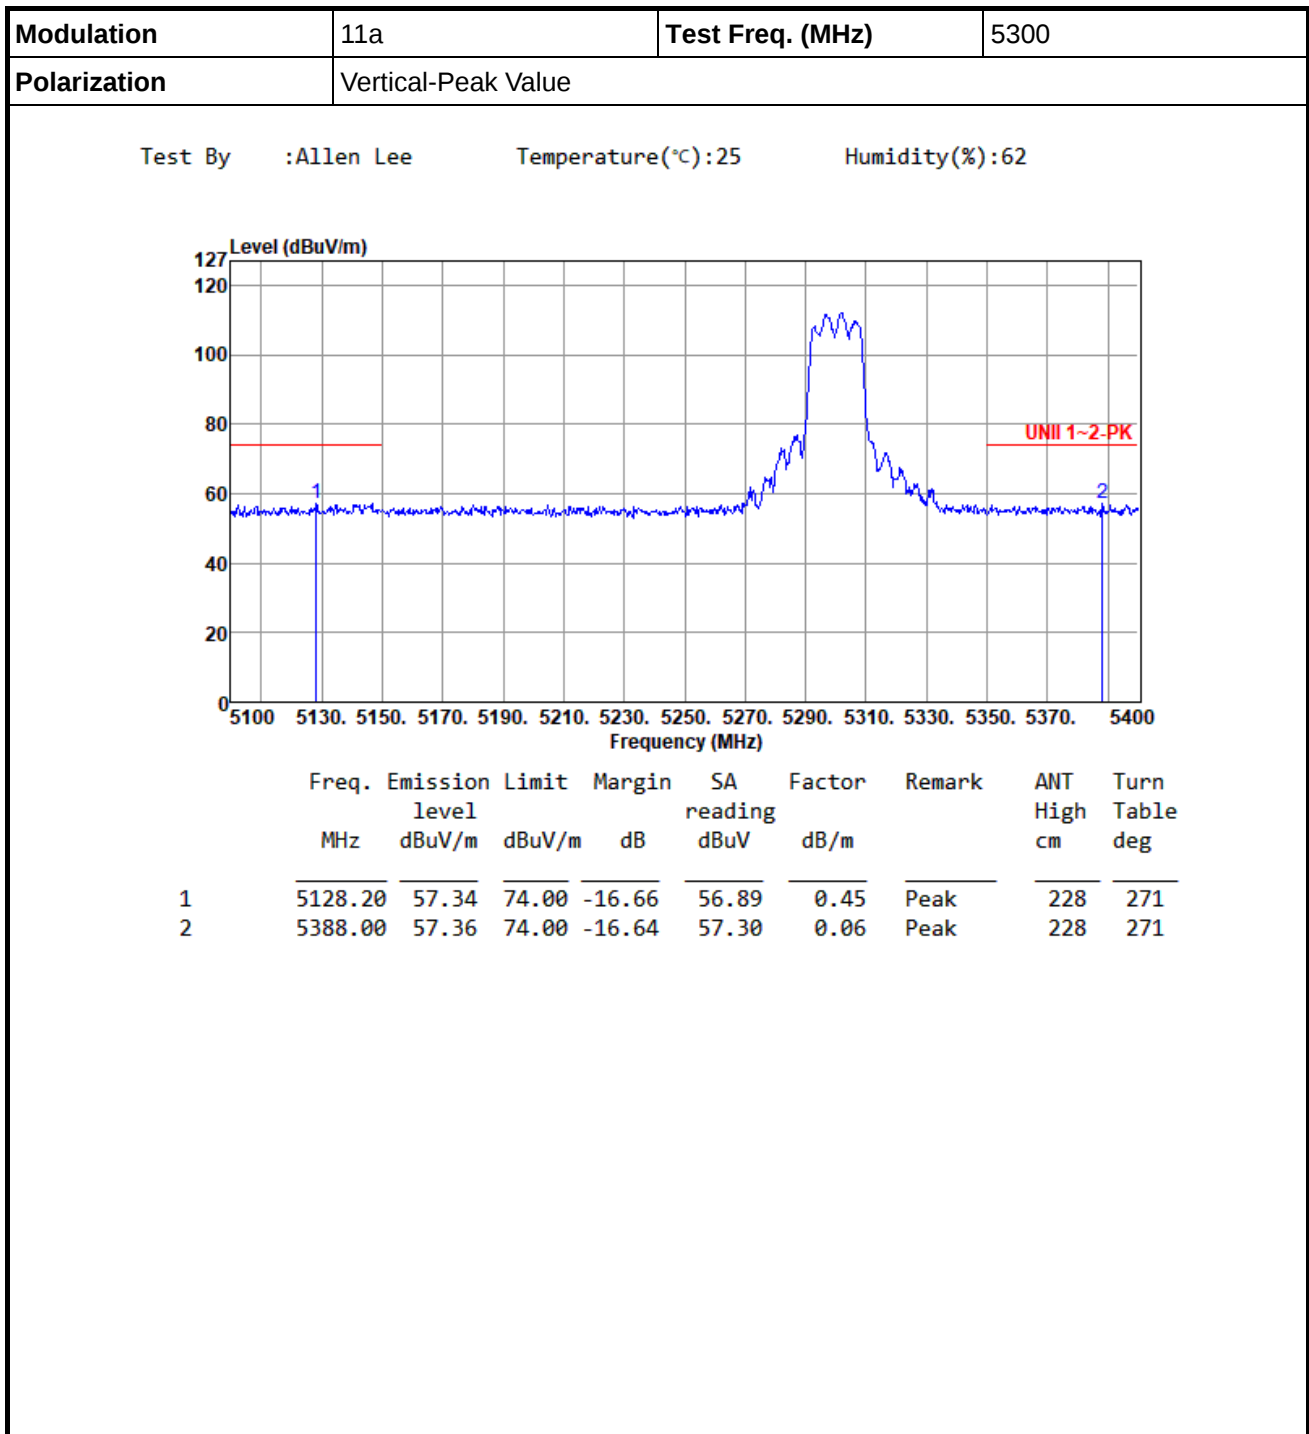


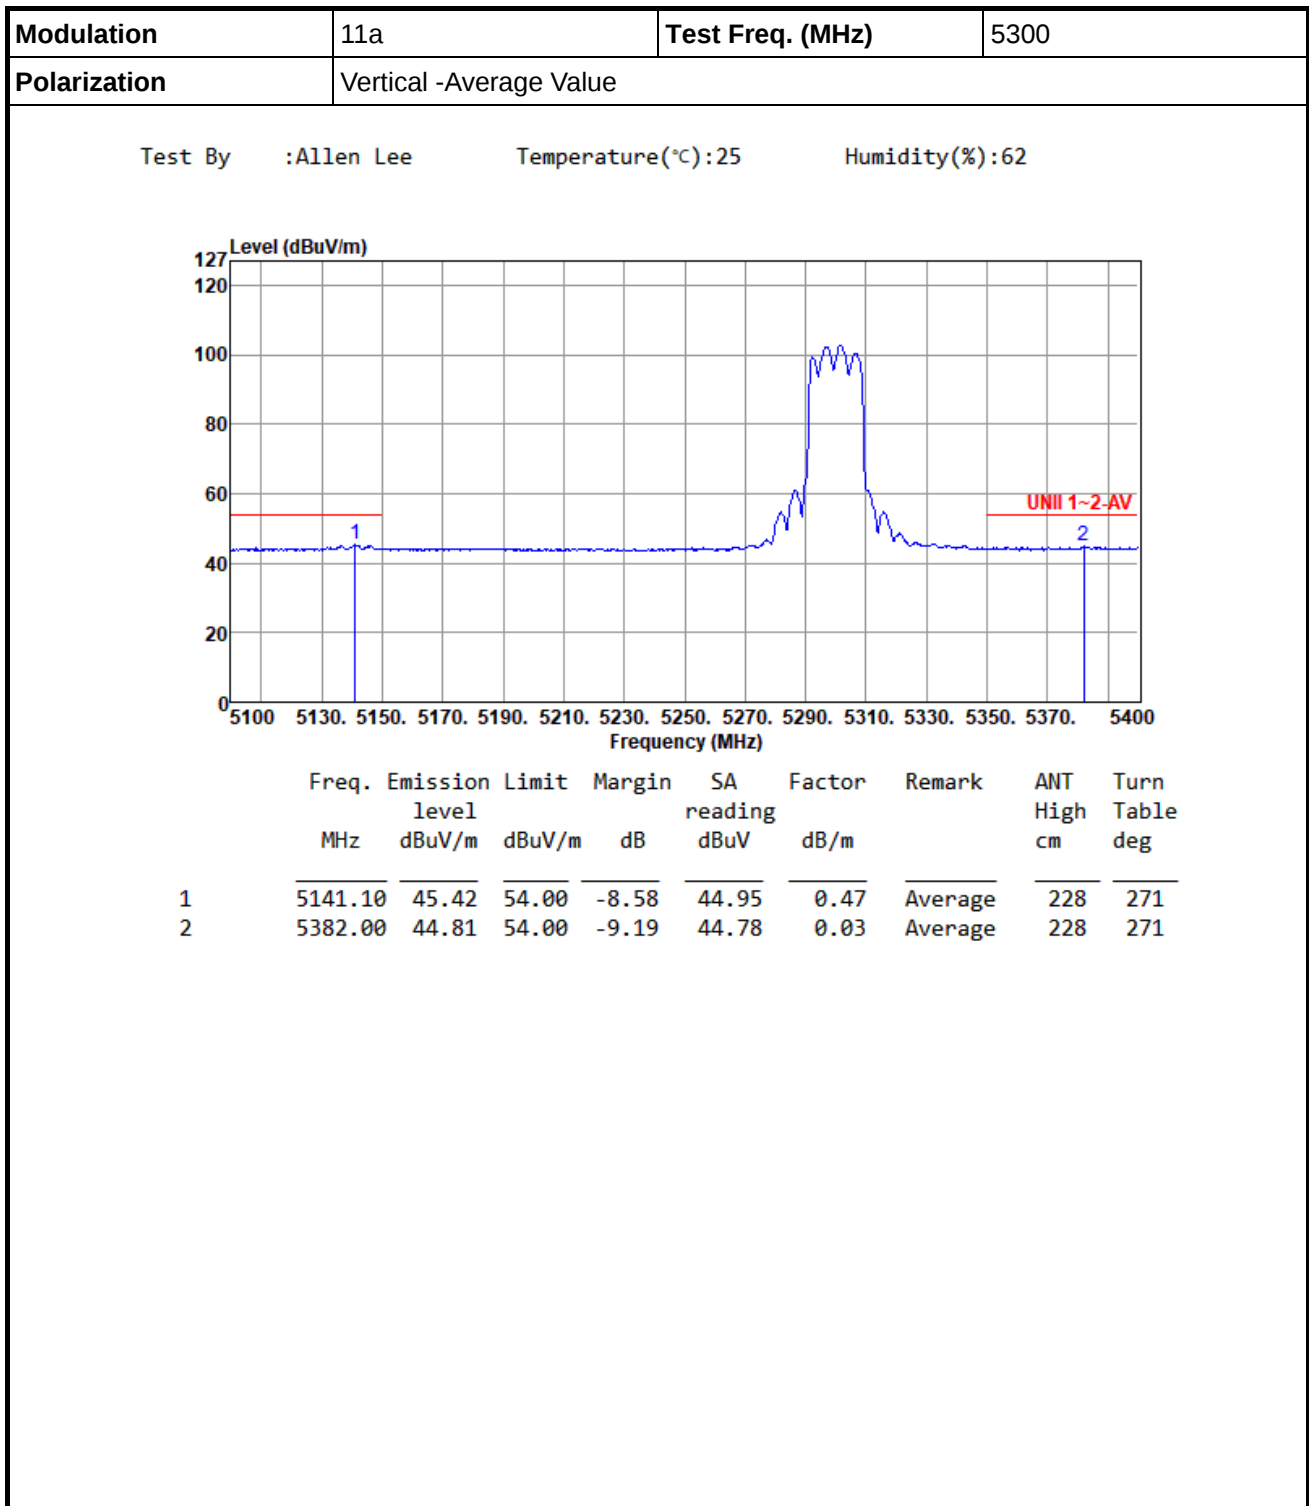


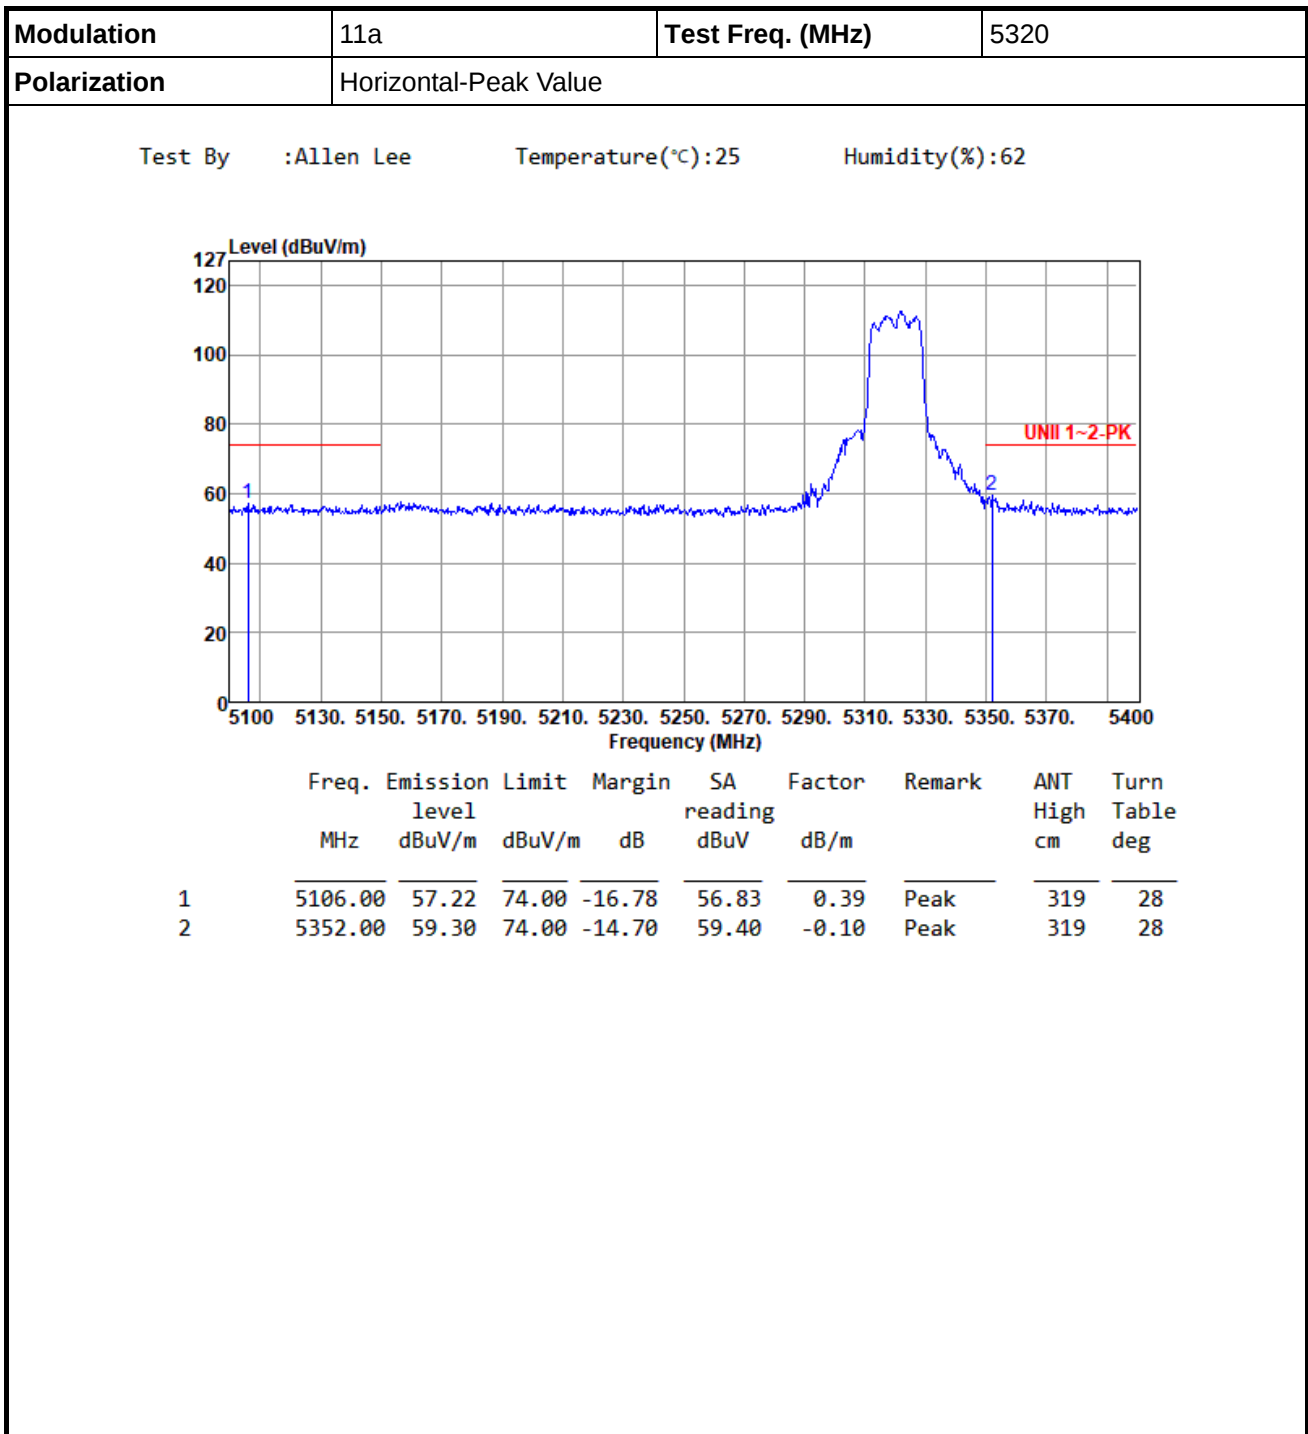

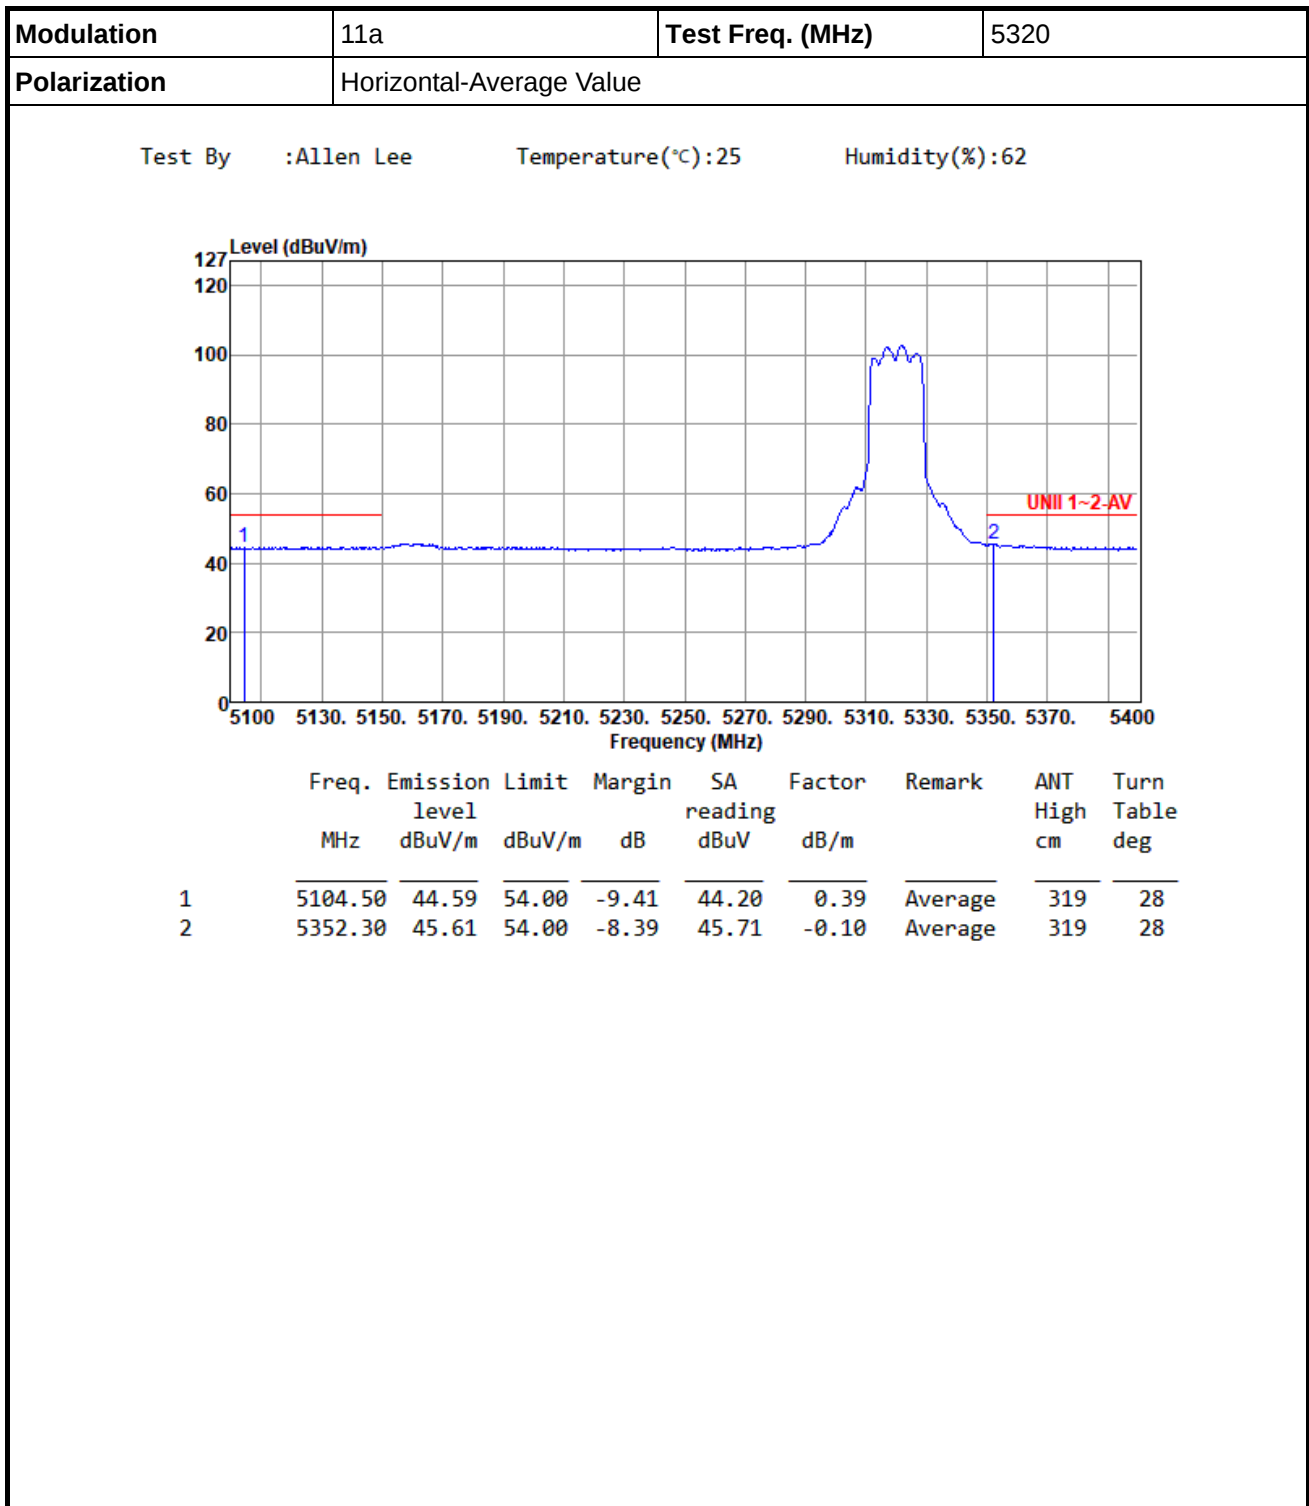


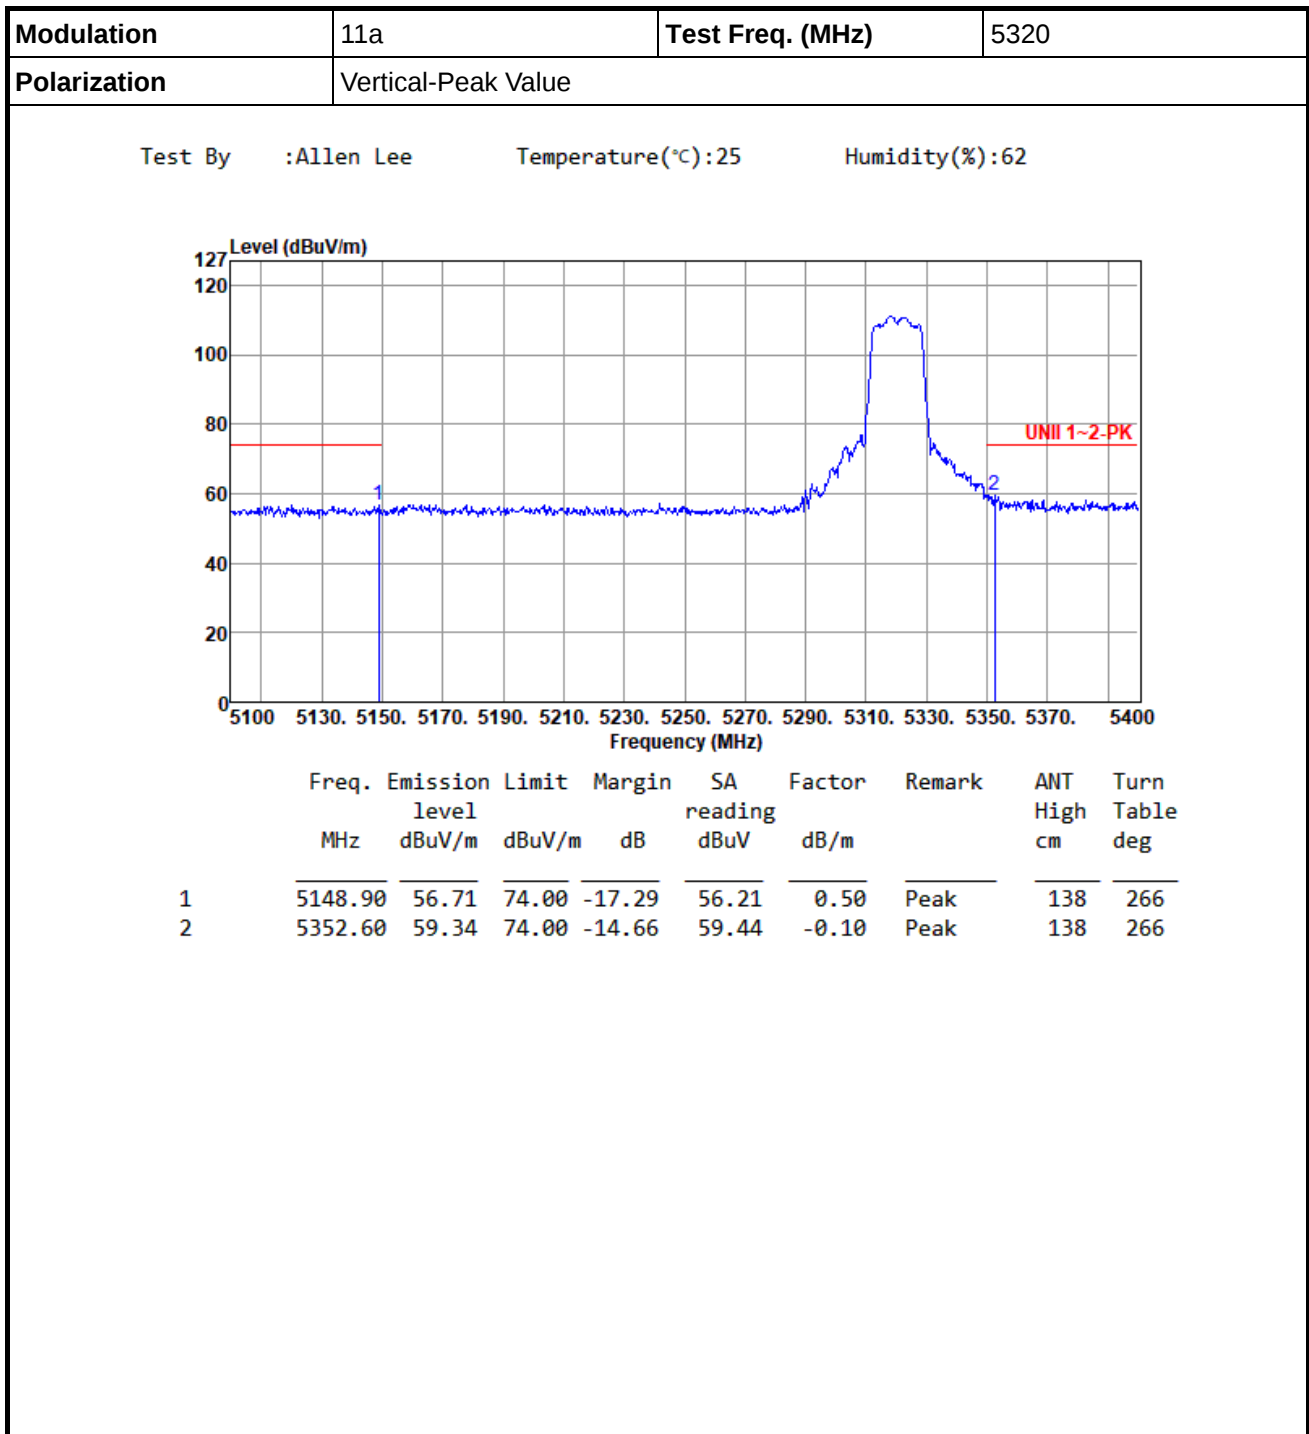


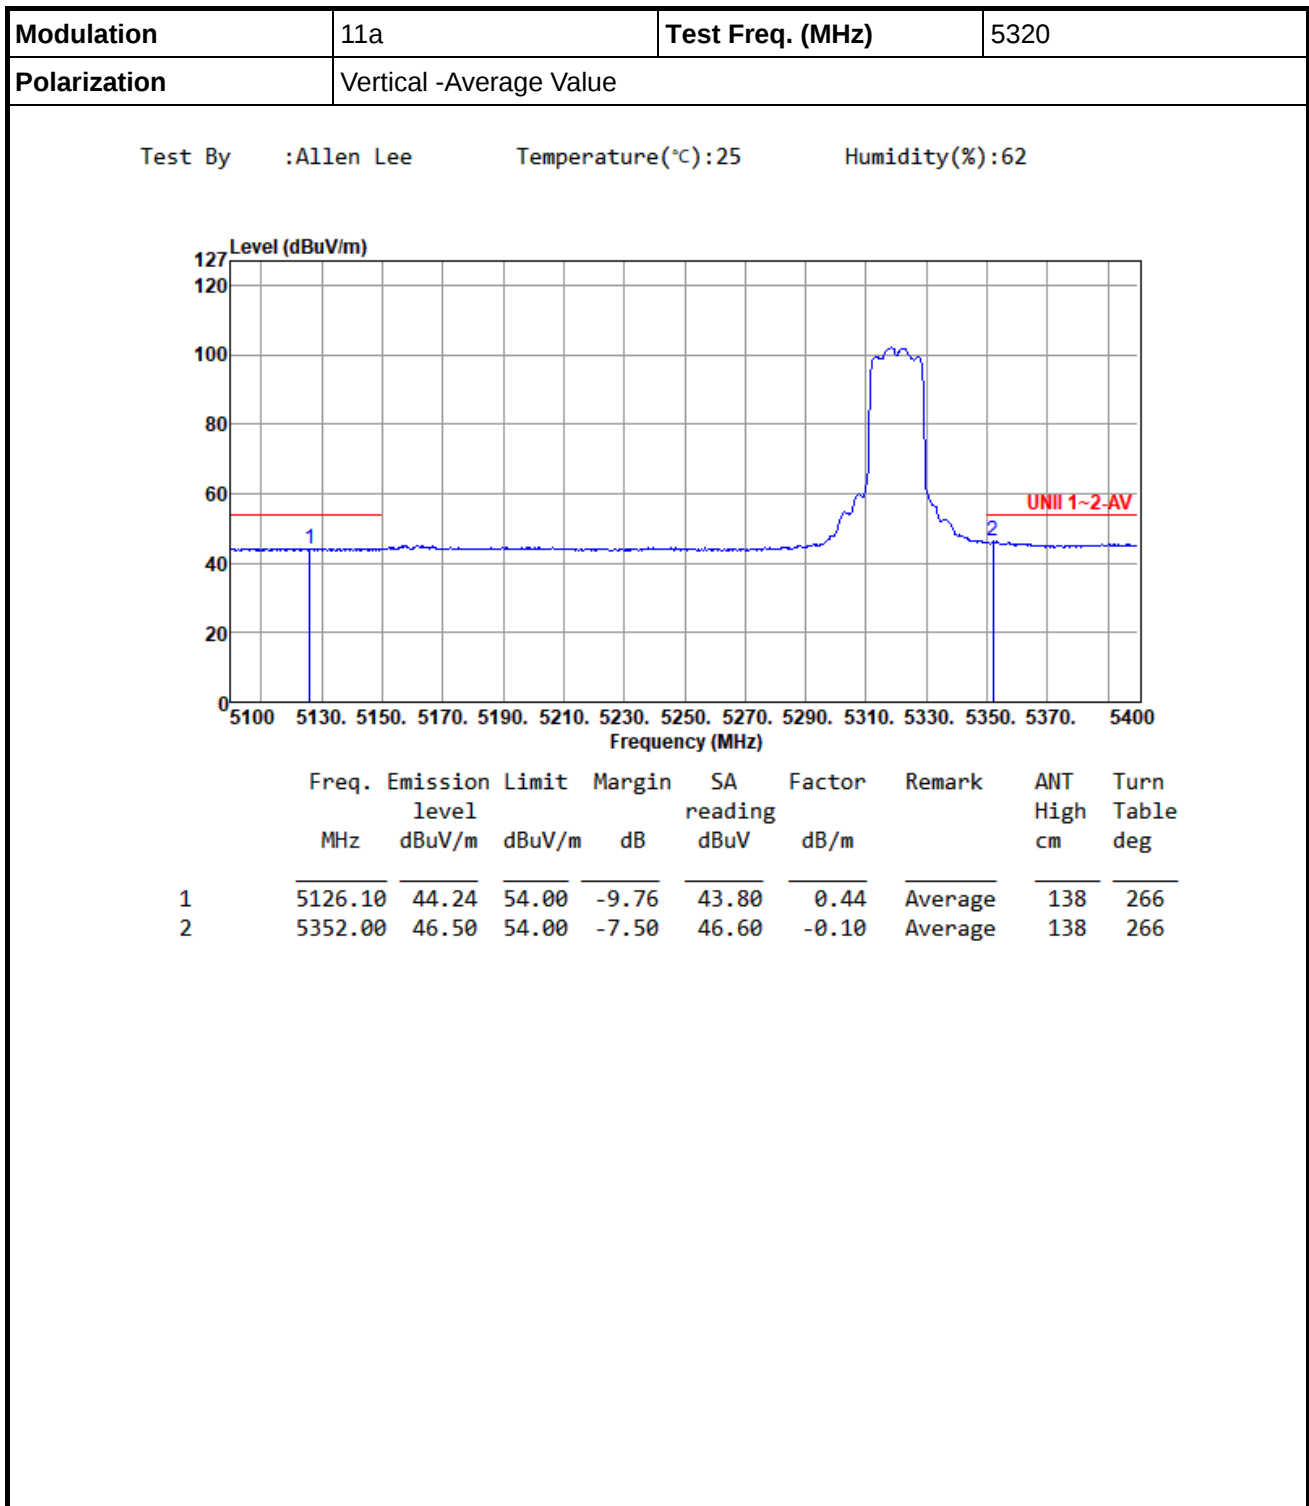

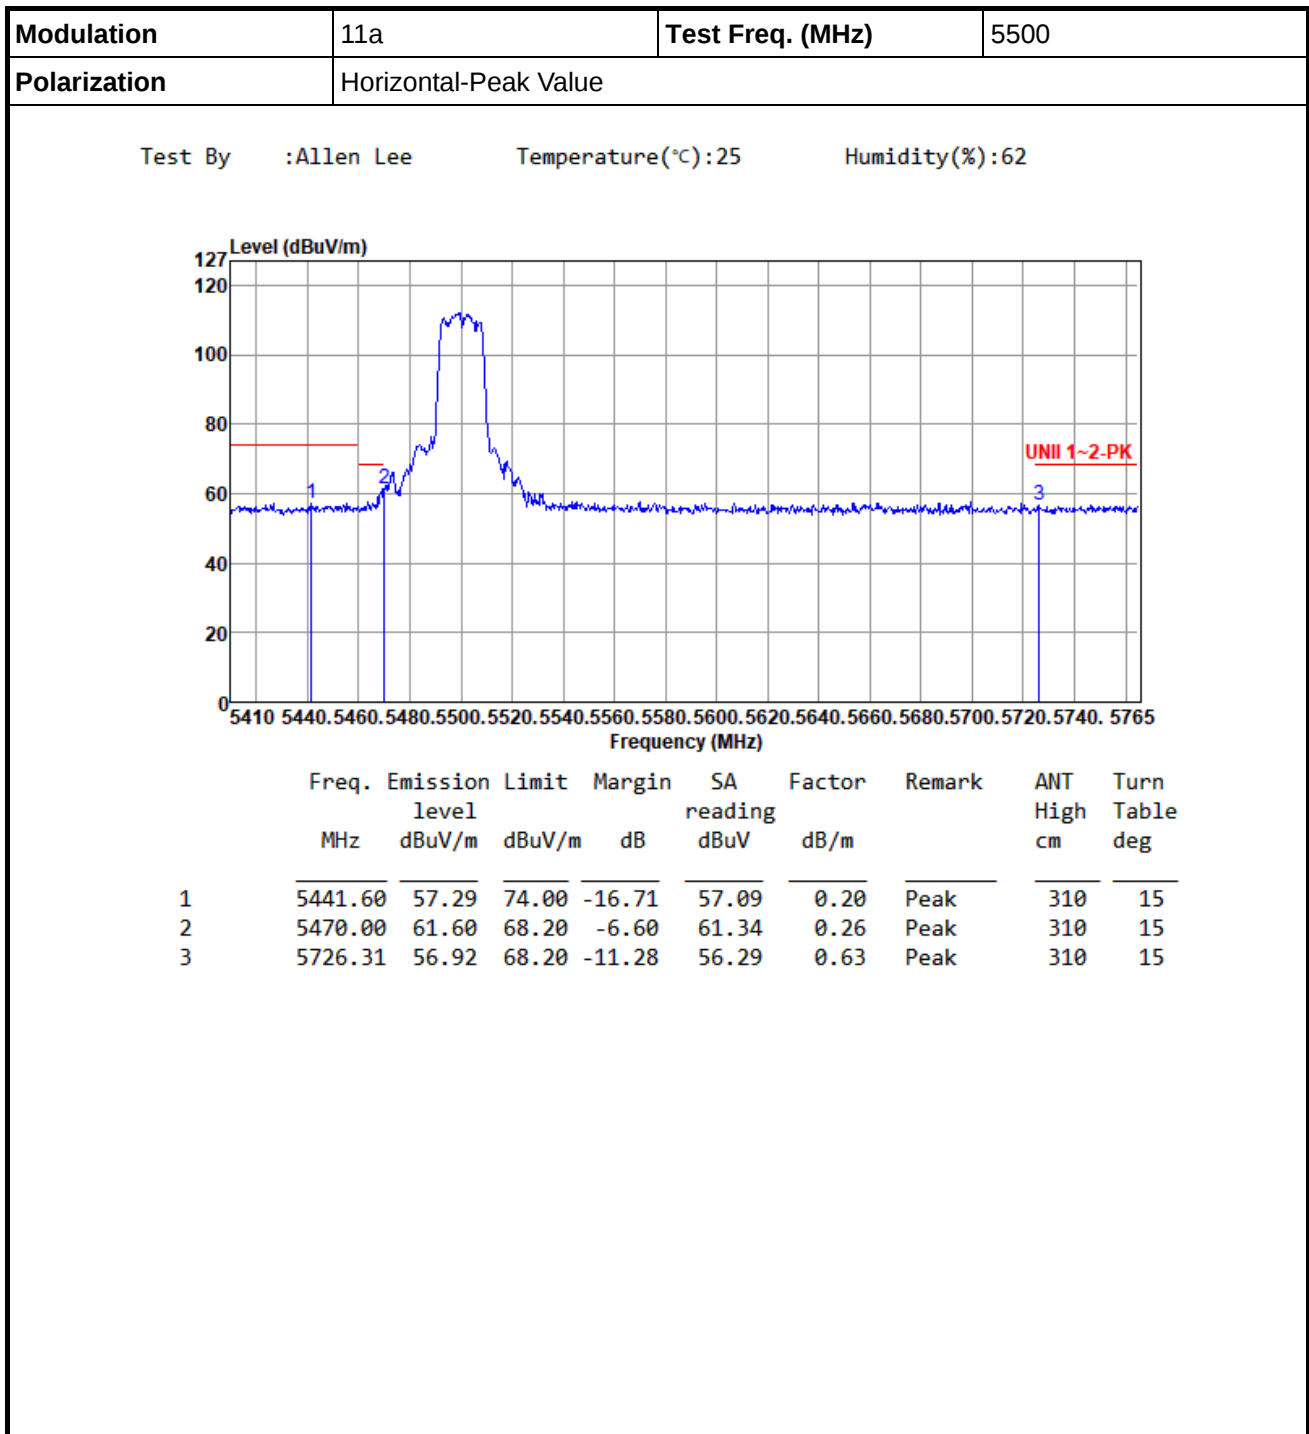


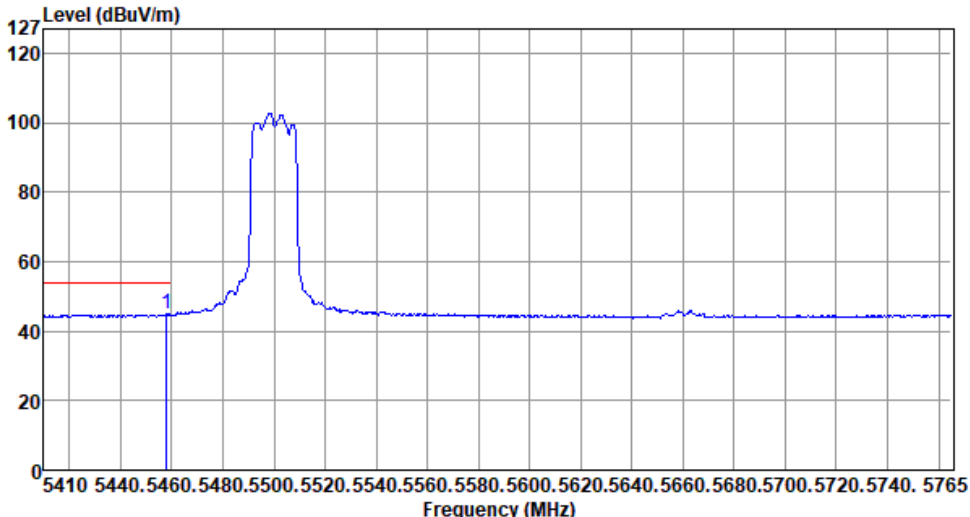


Modulation	11a	Test Freq. (MHz)	5500						
Polarization	Horizontal-Average Value								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5457.93	45.15	54.00	-8.85	44.90	0.25	Average	310	15

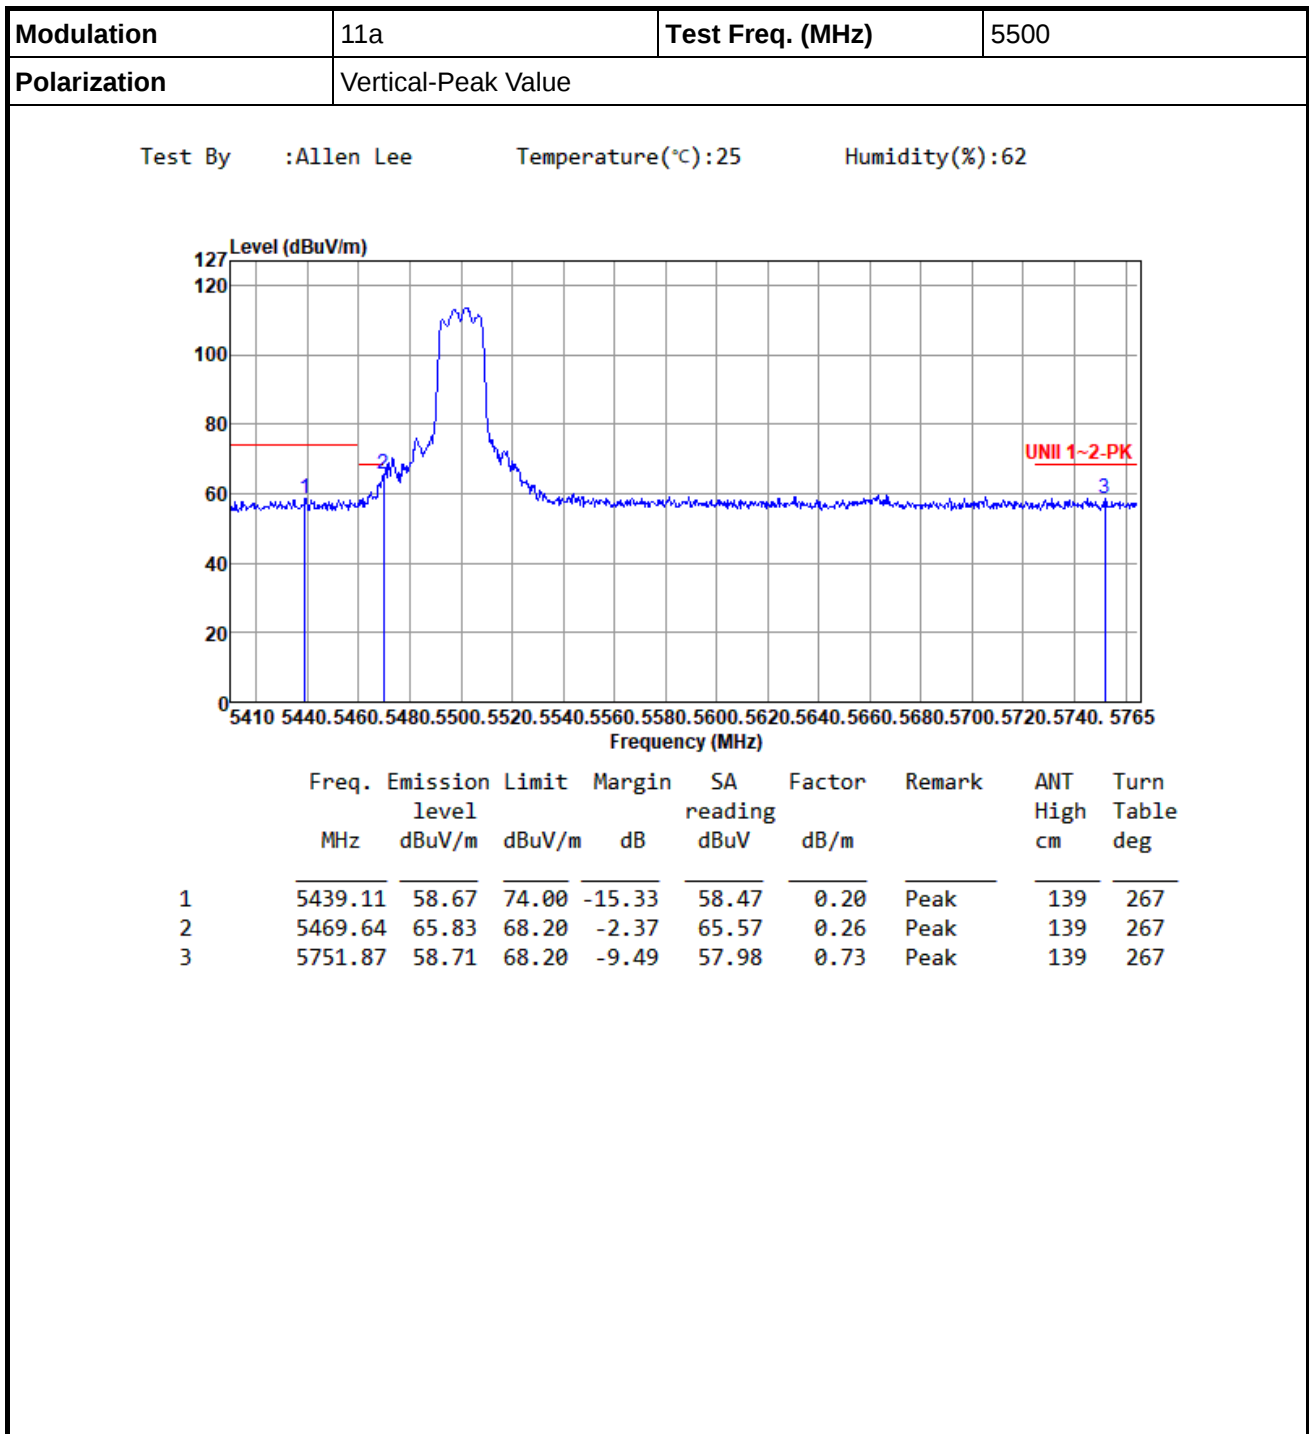


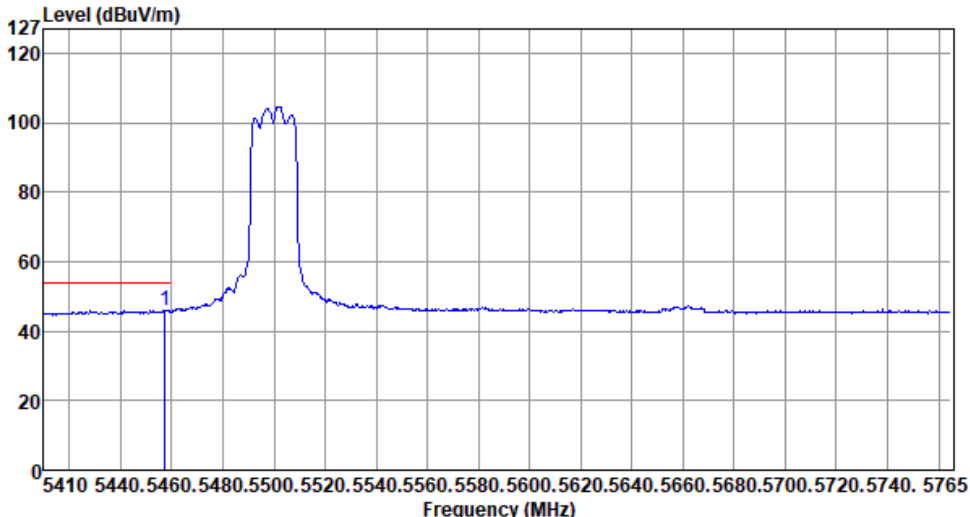


Modulation	11a	Test Freq. (MHz)	5500						
Polarization	Vertical -Average Value								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62									
Level (dBuV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5457.22	46.06	54.00	-7.94	45.82	0.24	Average	139	267

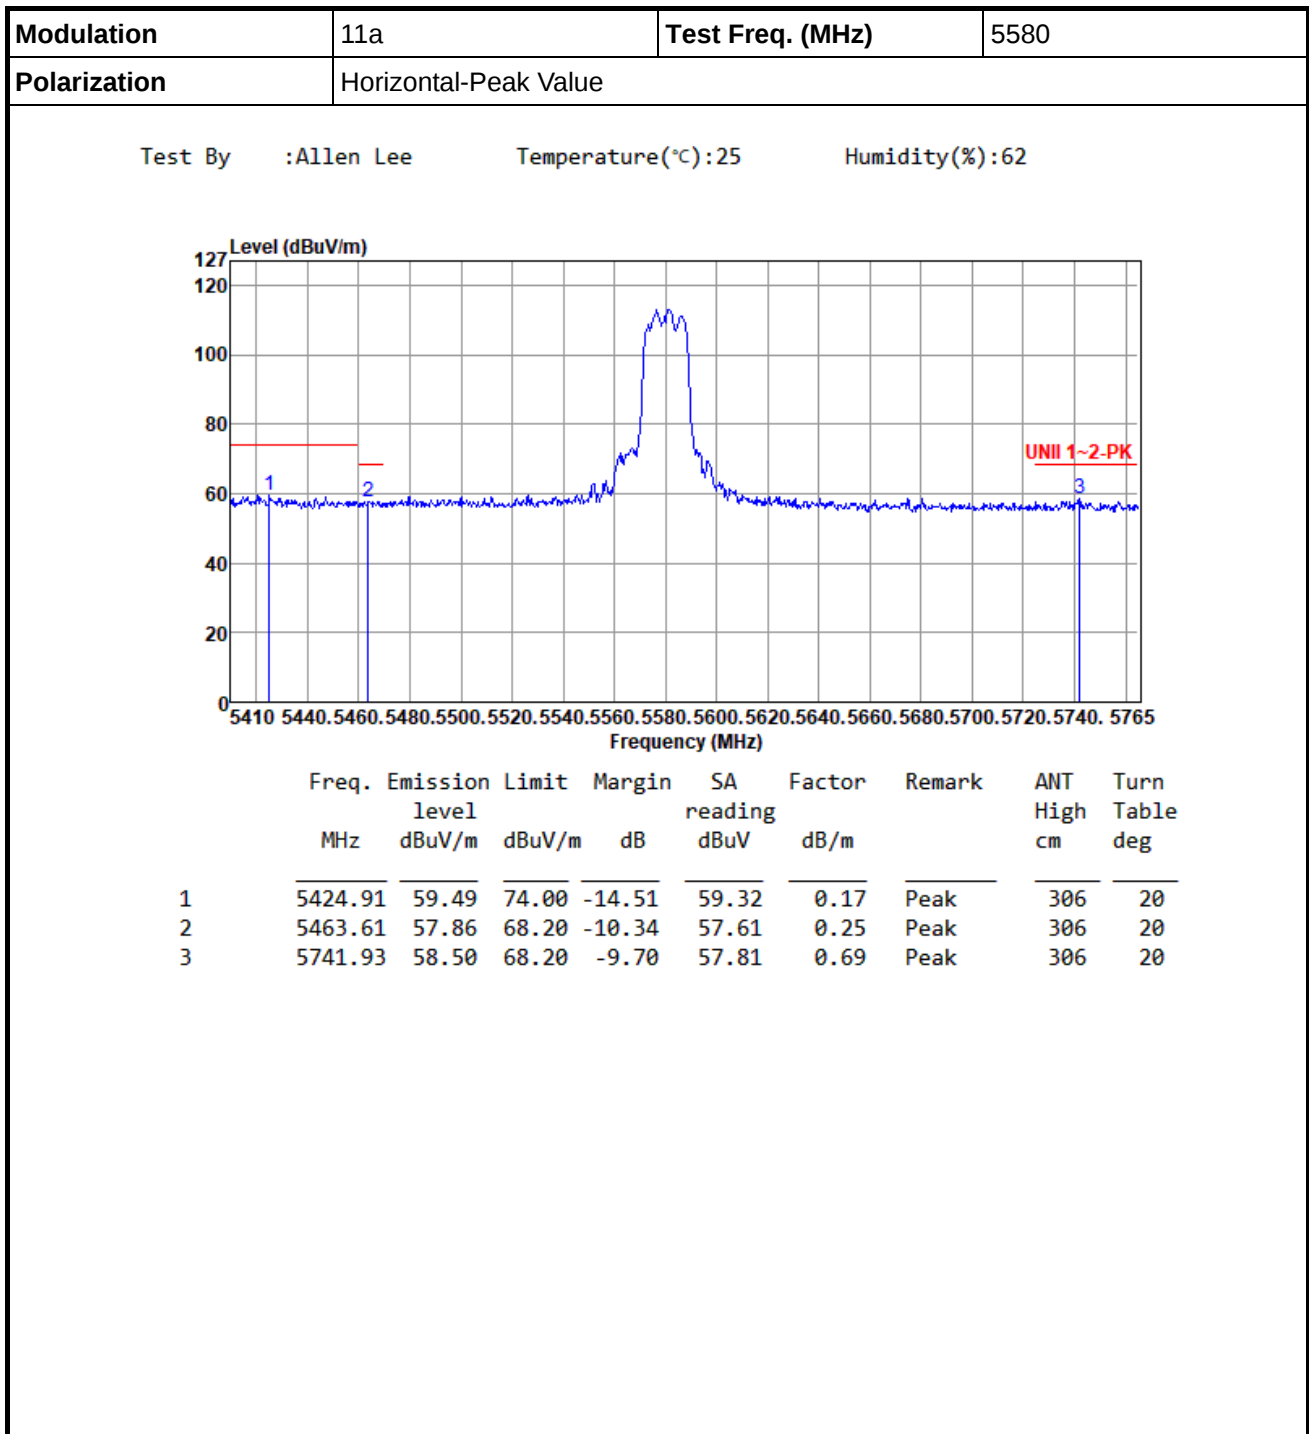


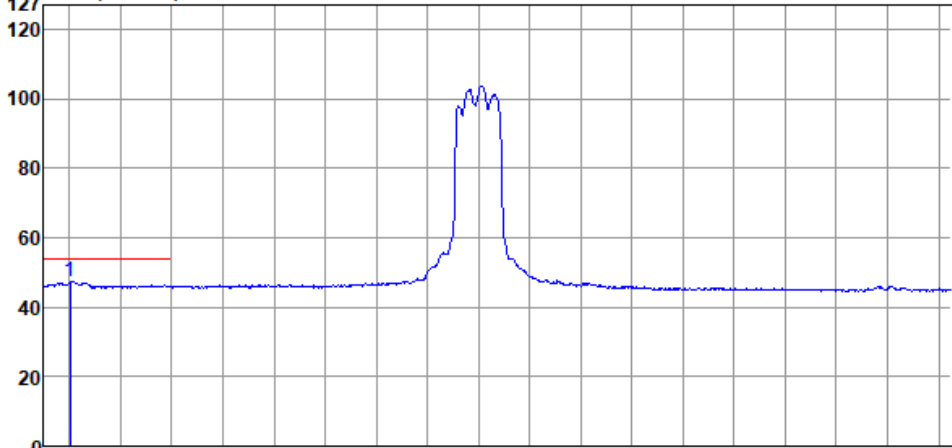



Modulation	11a	Test Freq. (MHz)	5580						
Polarization	Horizontal-Average Value								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5420.30	47.24	54.00	-6.76	47.08	0.16	Average	306	20

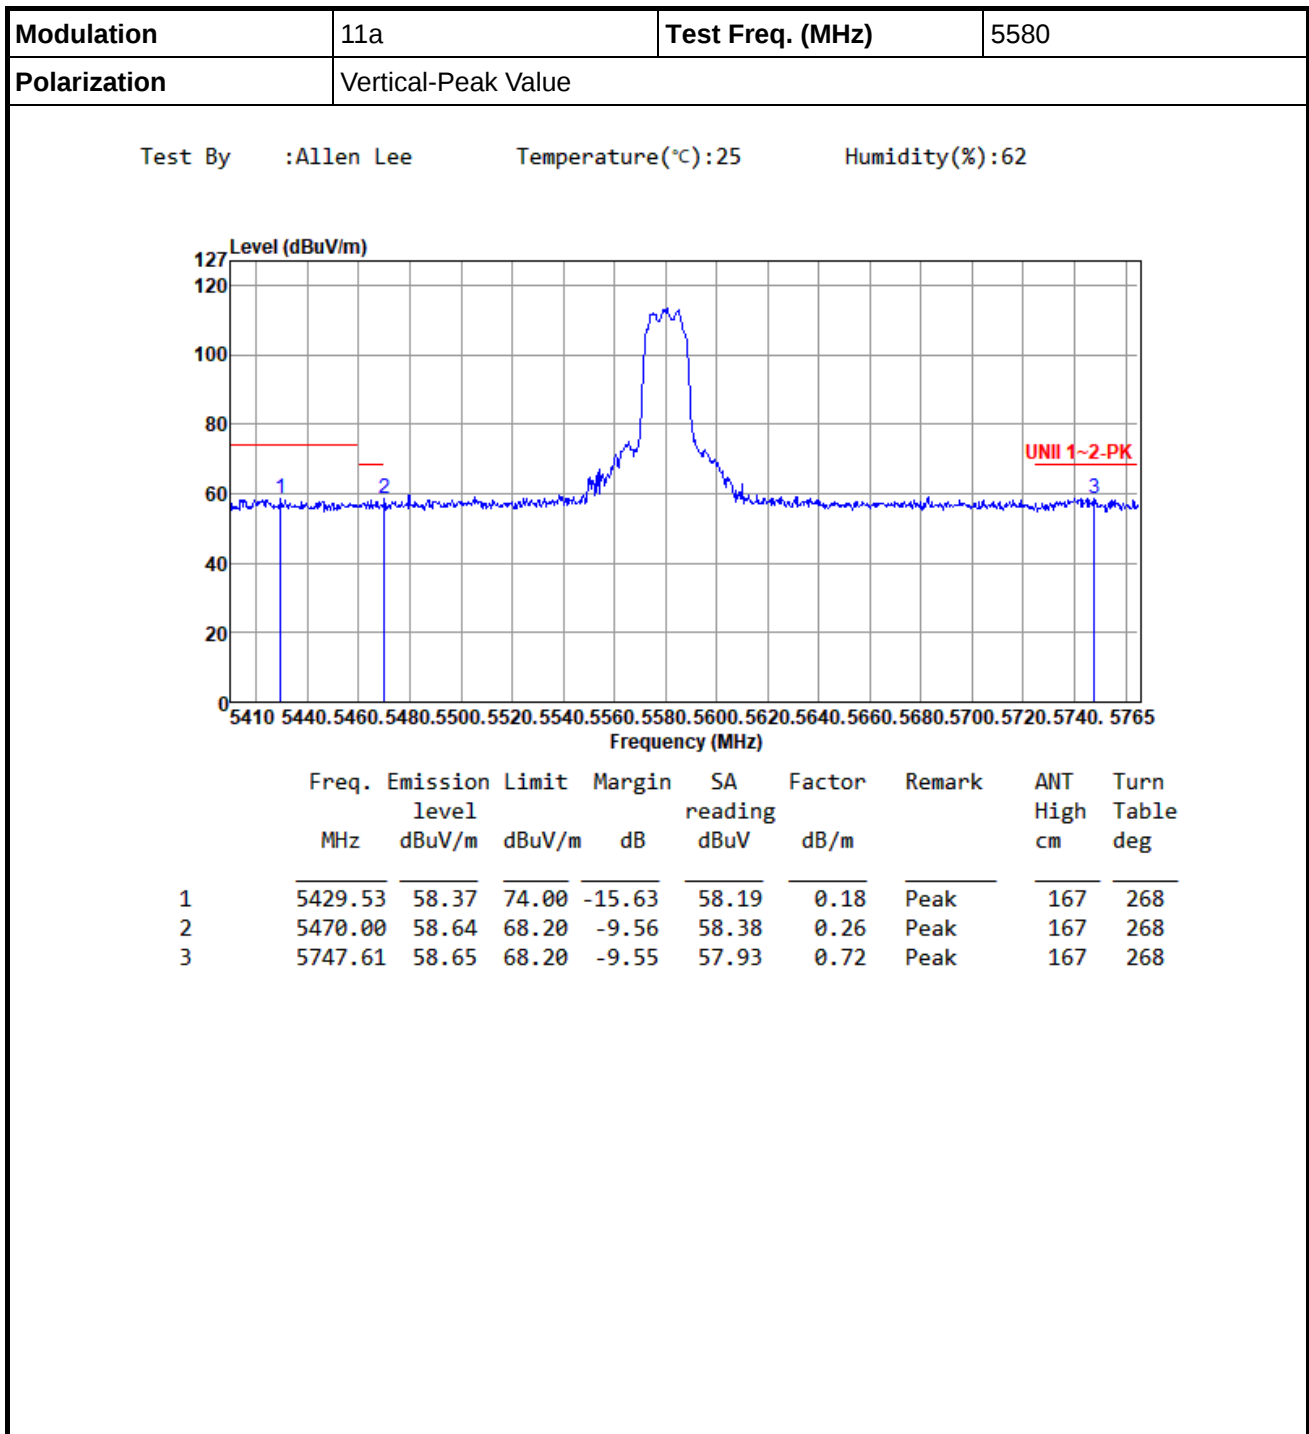


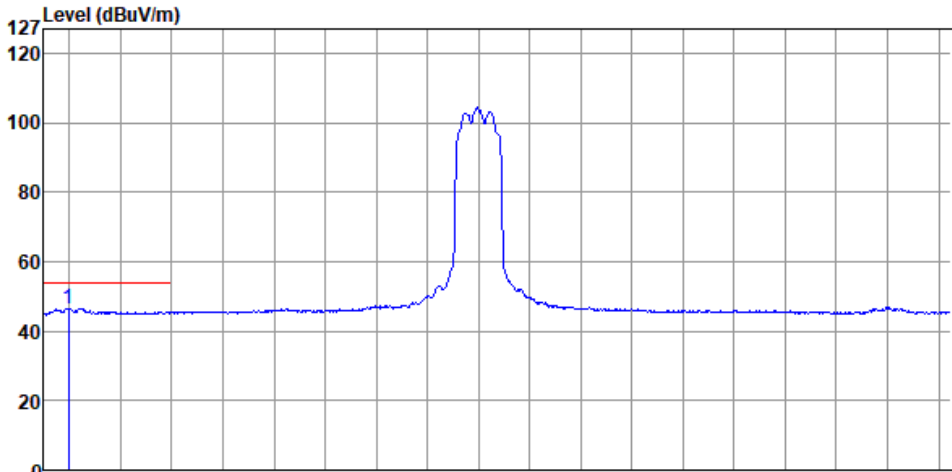

Modulation	11a	Test Freq. (MHz)	5580						
Polarization	Vertical -Average Value								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62									
Level (dBuV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	level				reading			High	Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5419.59	46.57	54.00	-7.43	46.41	0.16	Average	167	268

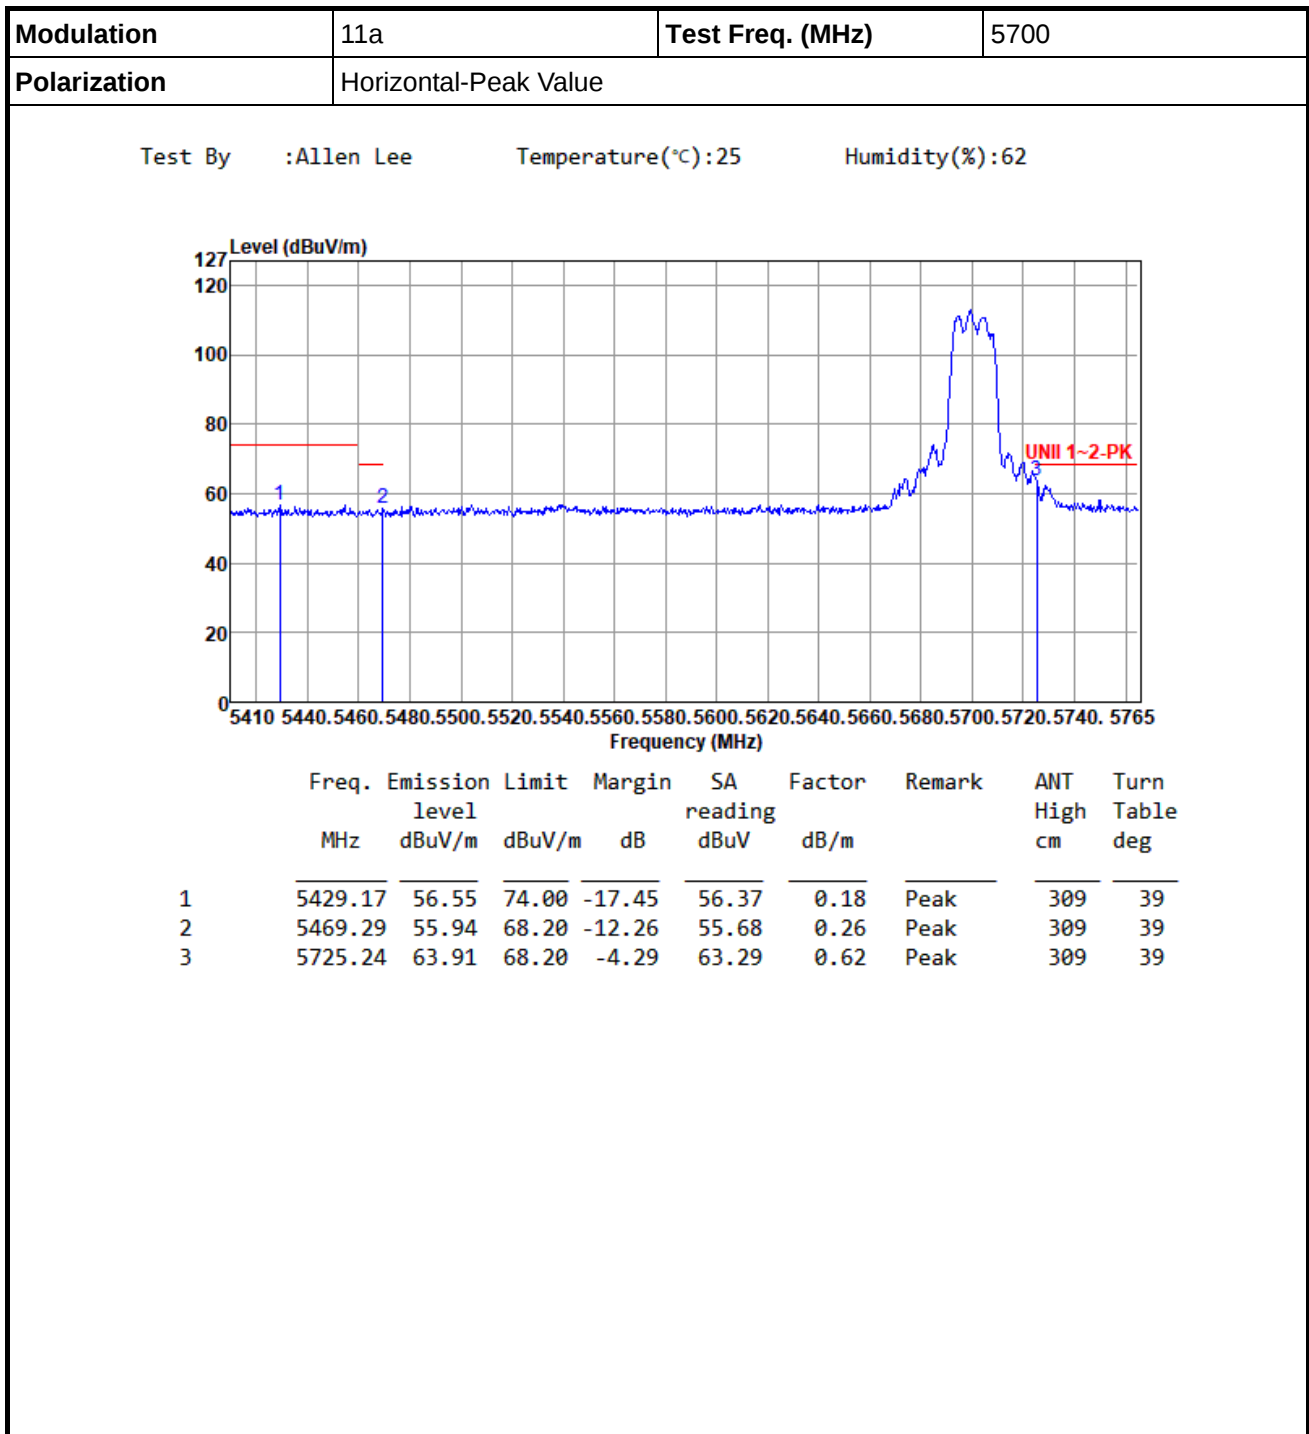


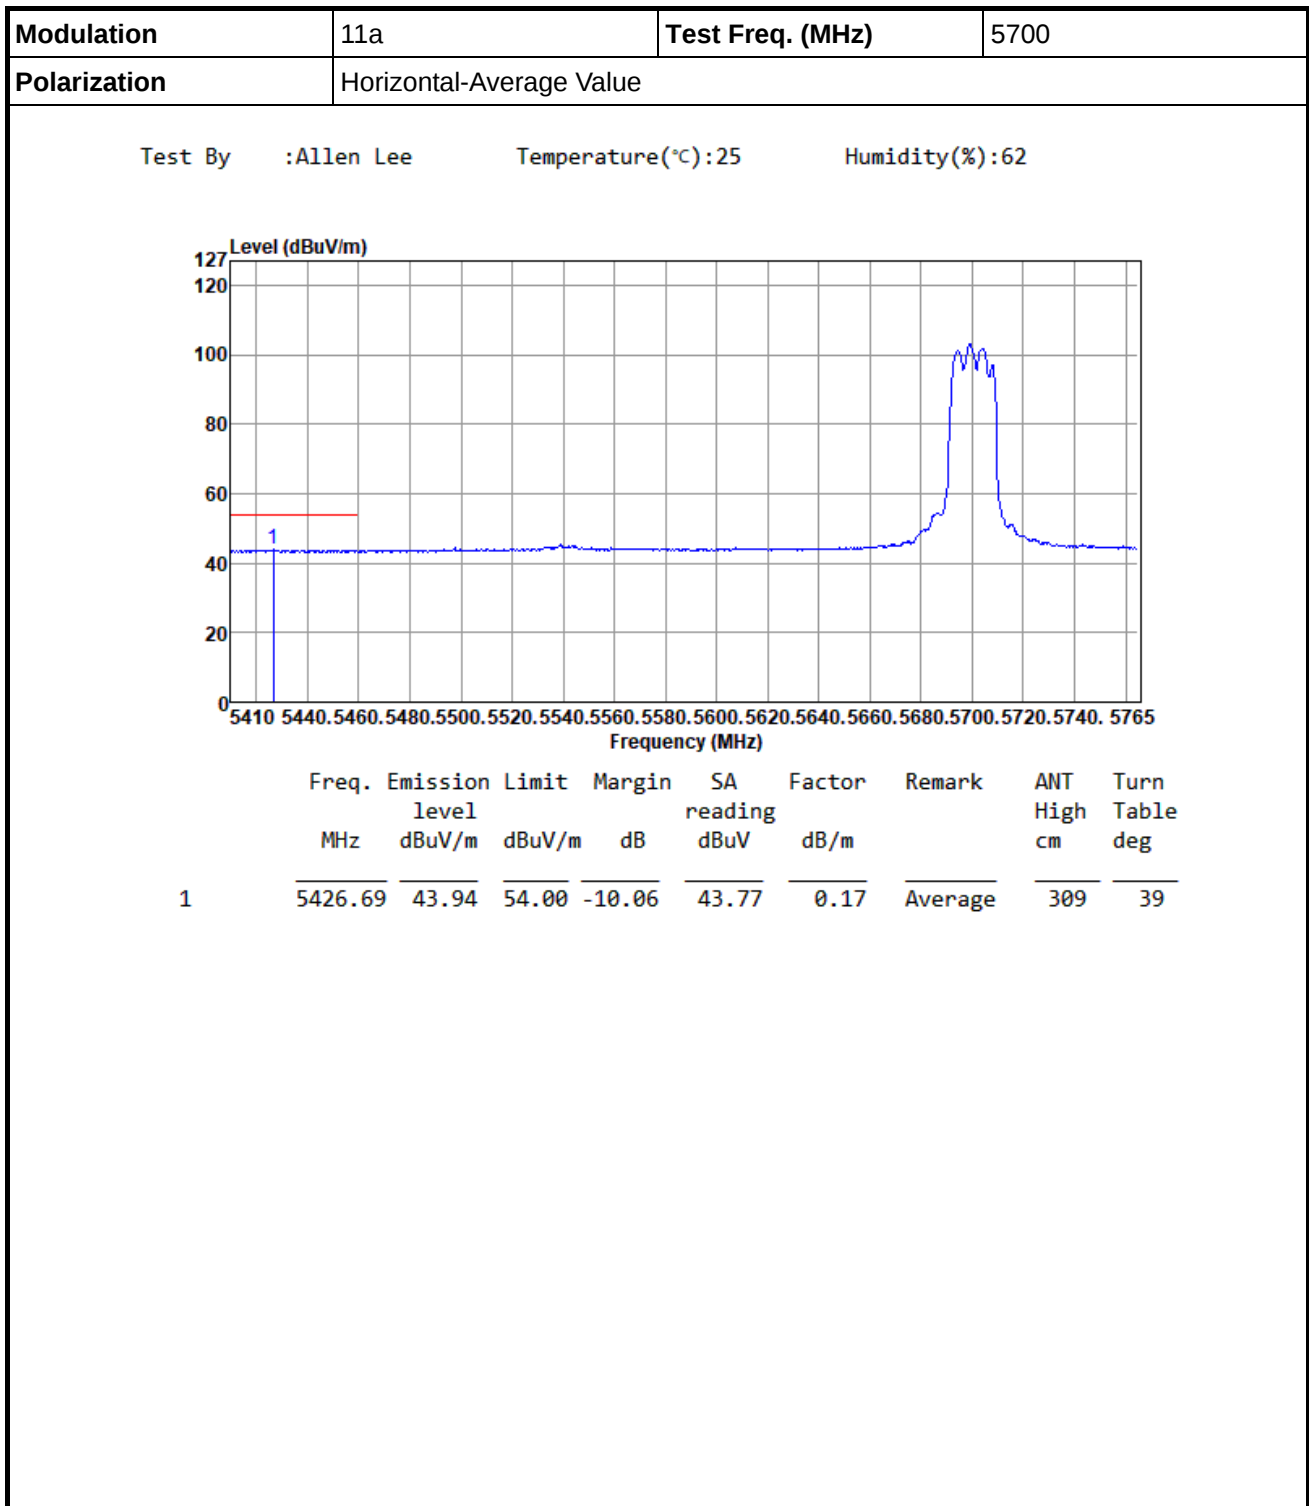


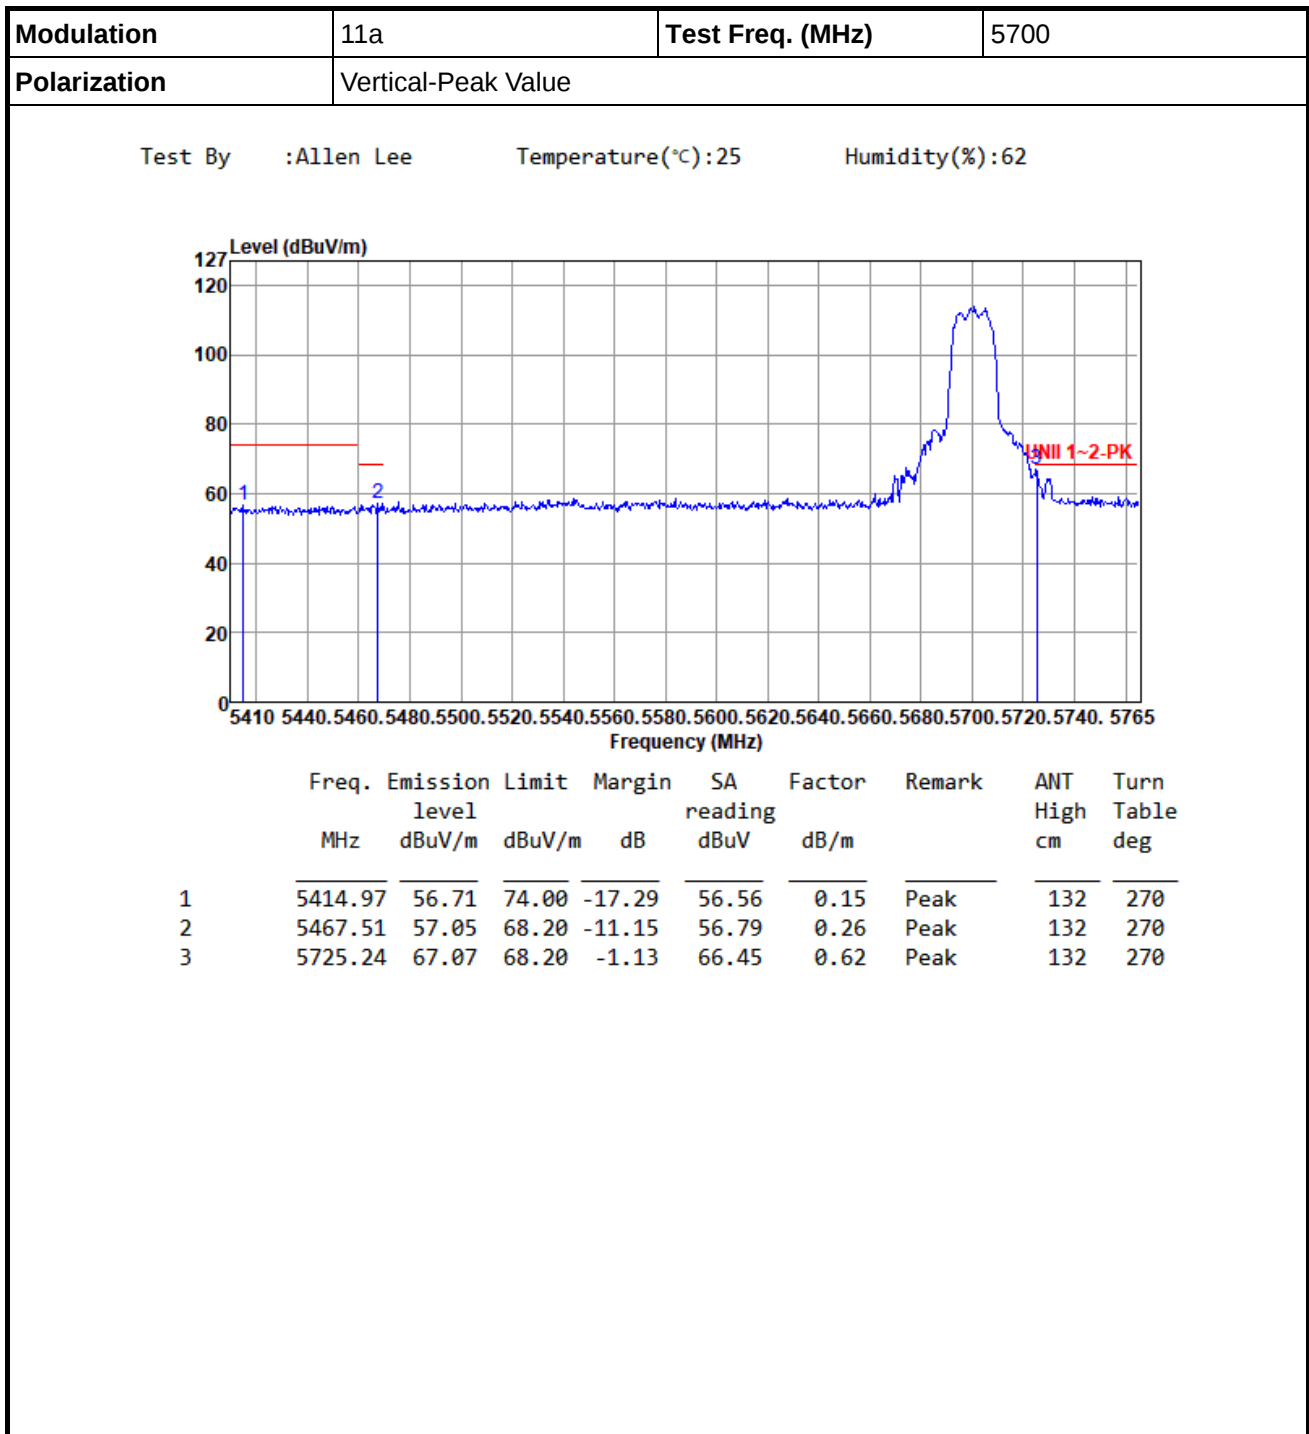






Modulation	11a	Test Freq. (MHz)	5700						
Polarization	Vertical -Average Value								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62									
Level (dBuV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5459.35	44.33	54.00	-9.67	44.09	0.24	Average	132	270

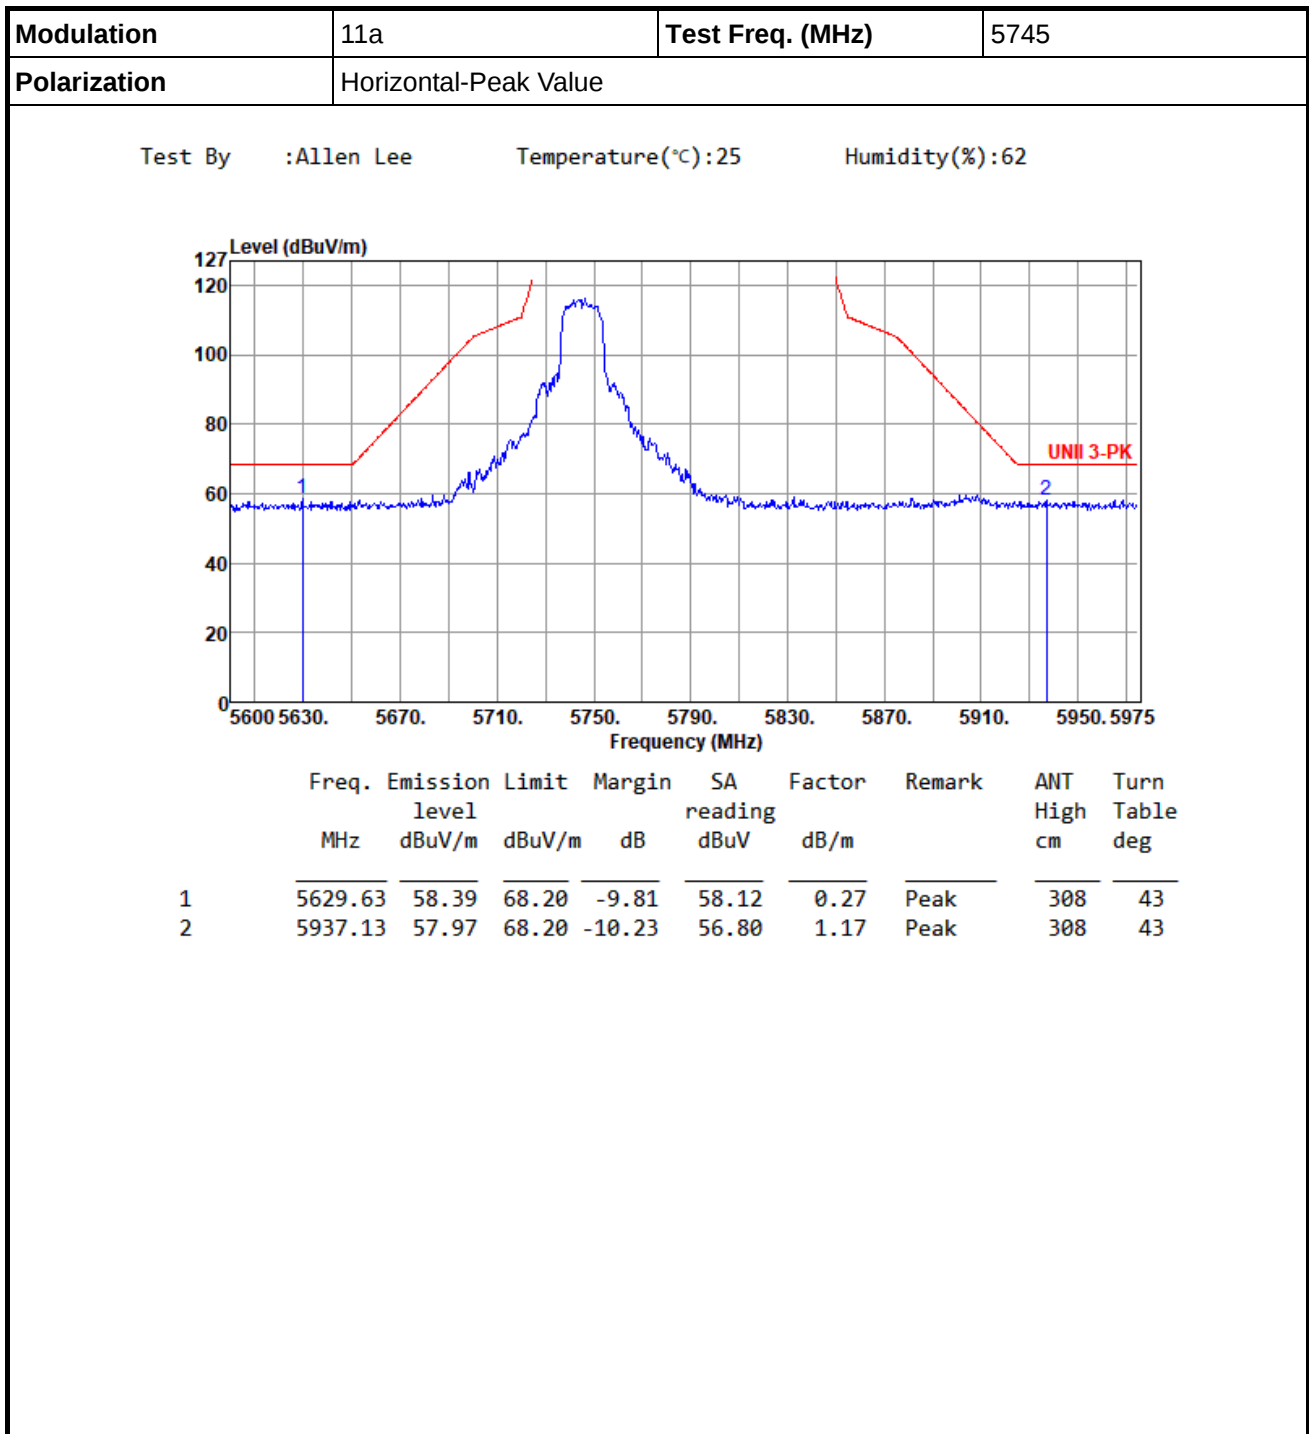


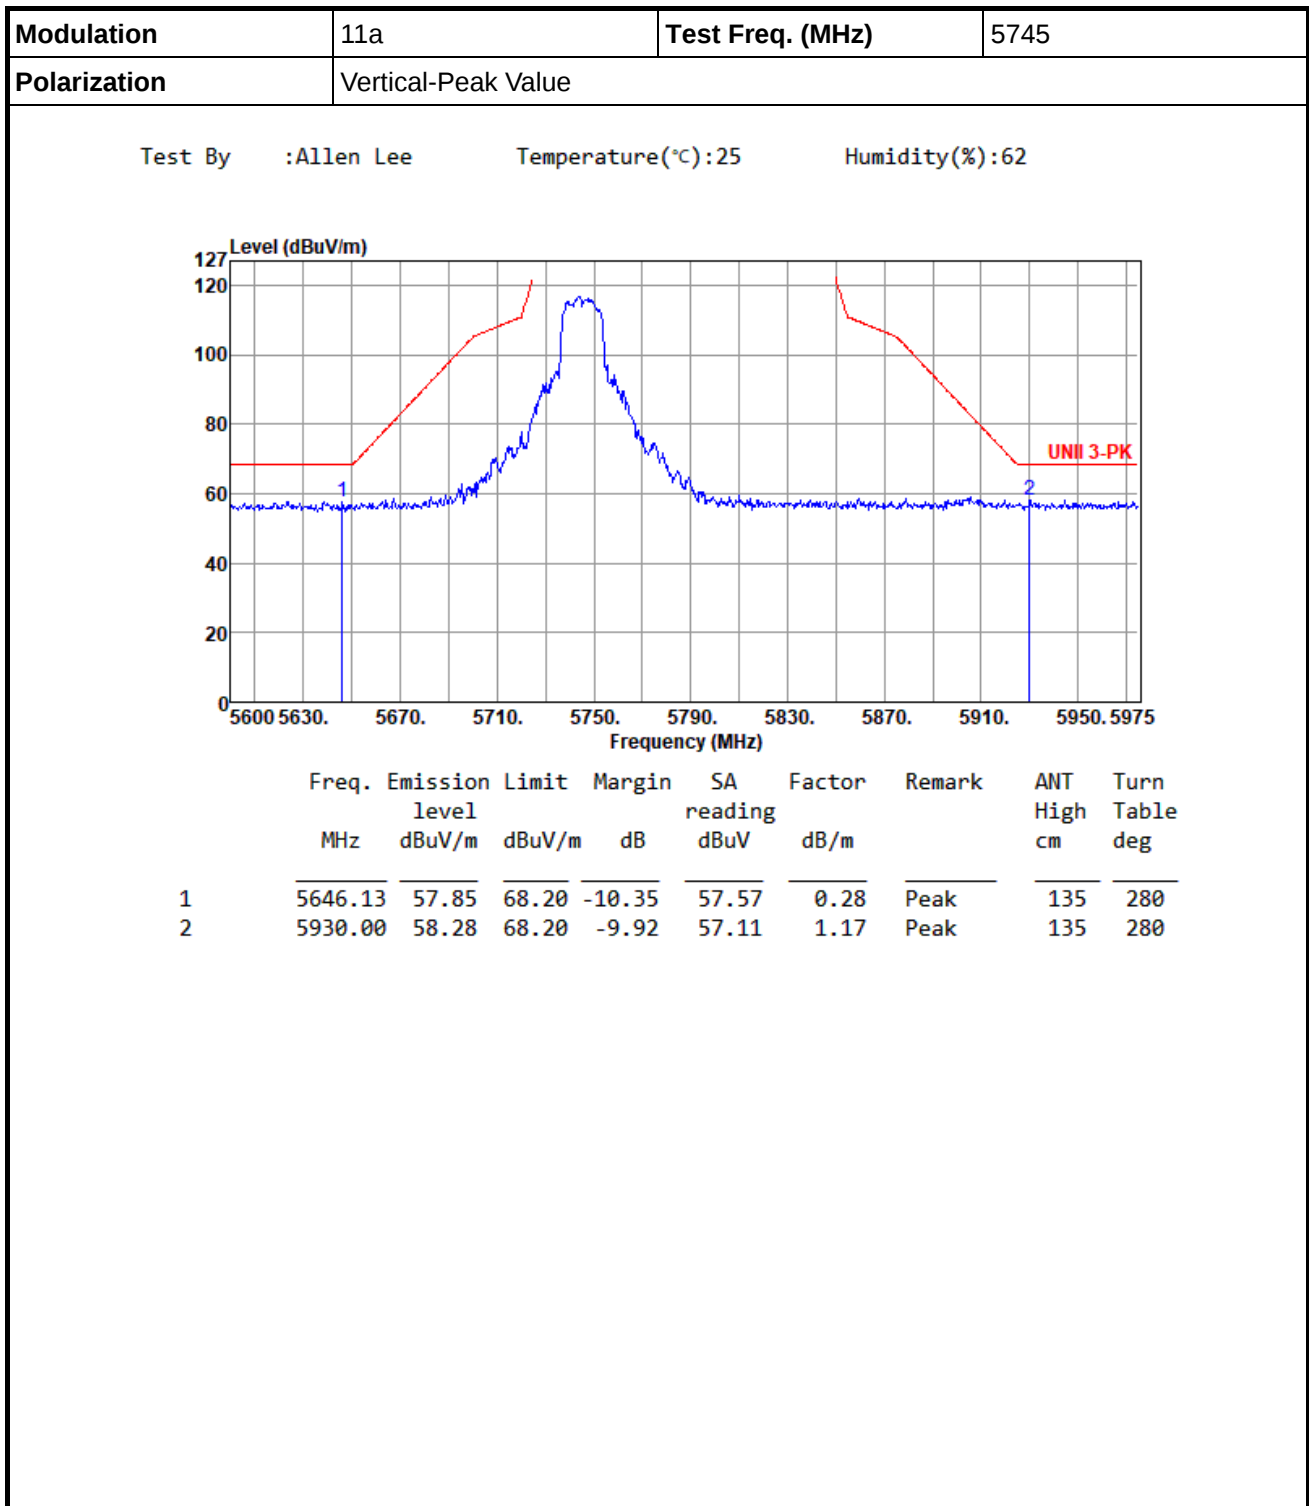


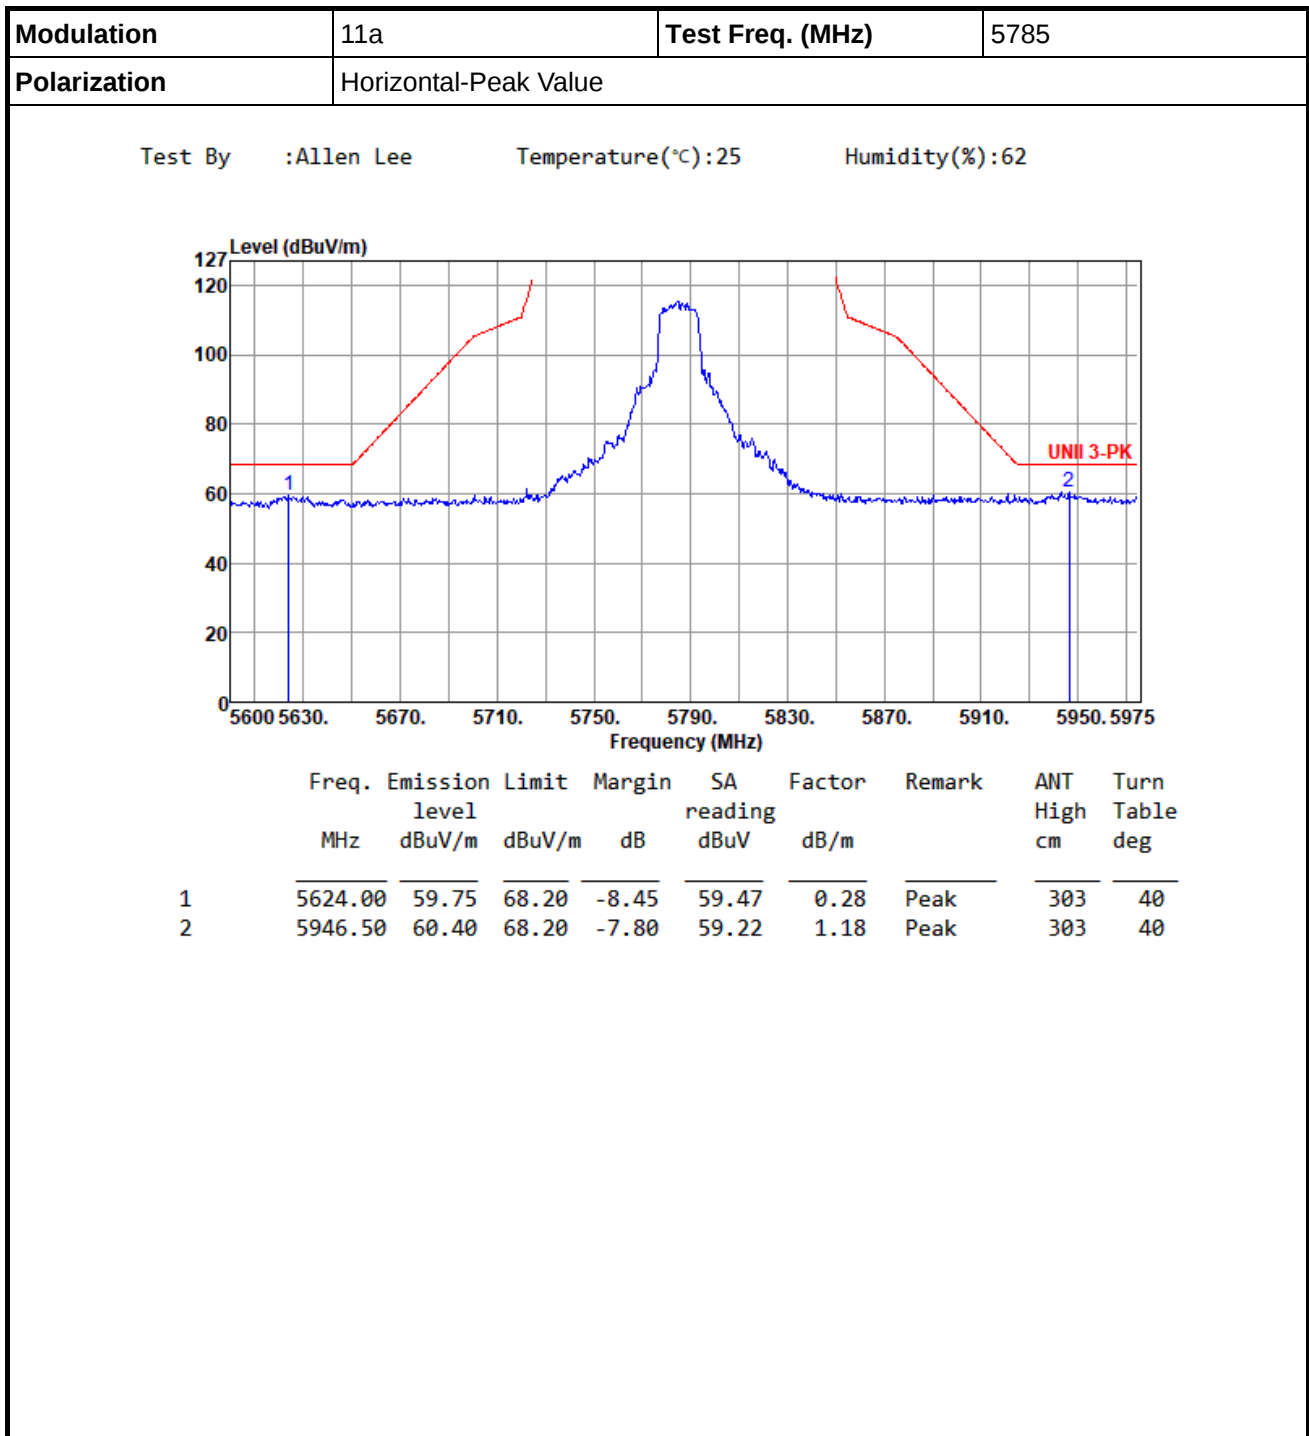


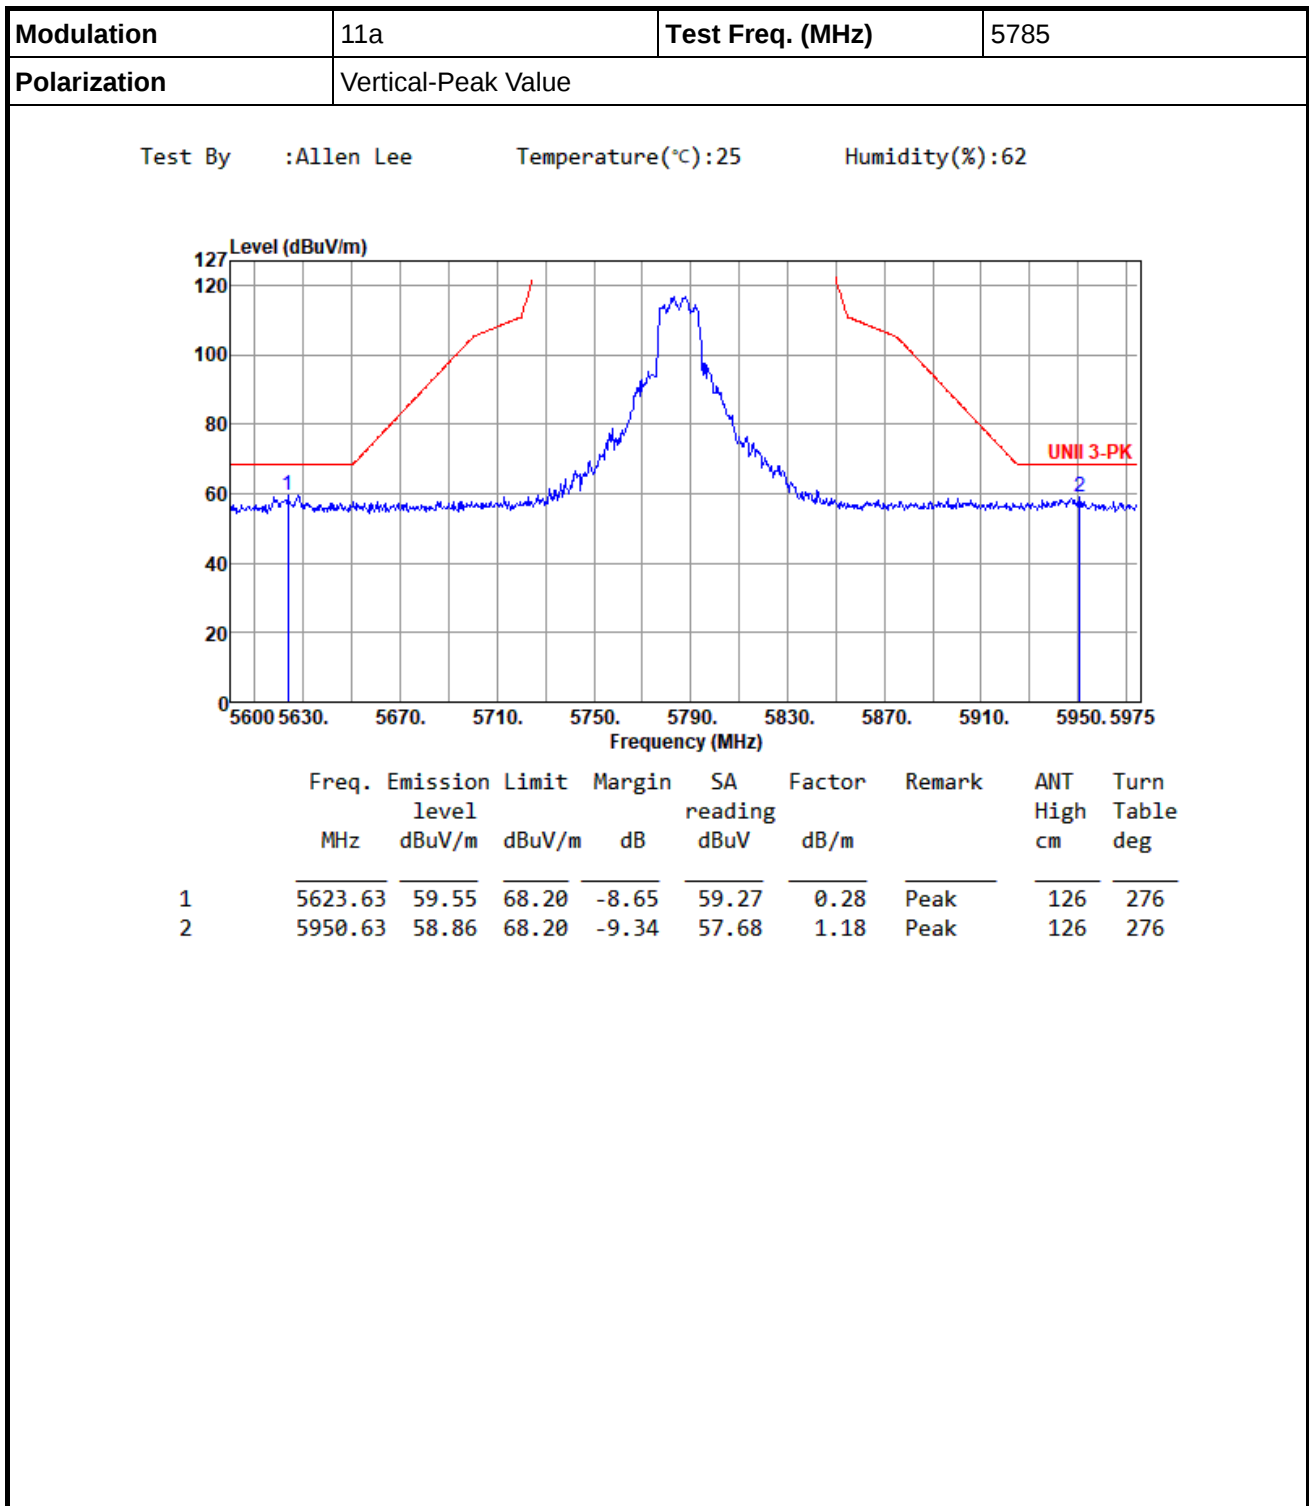


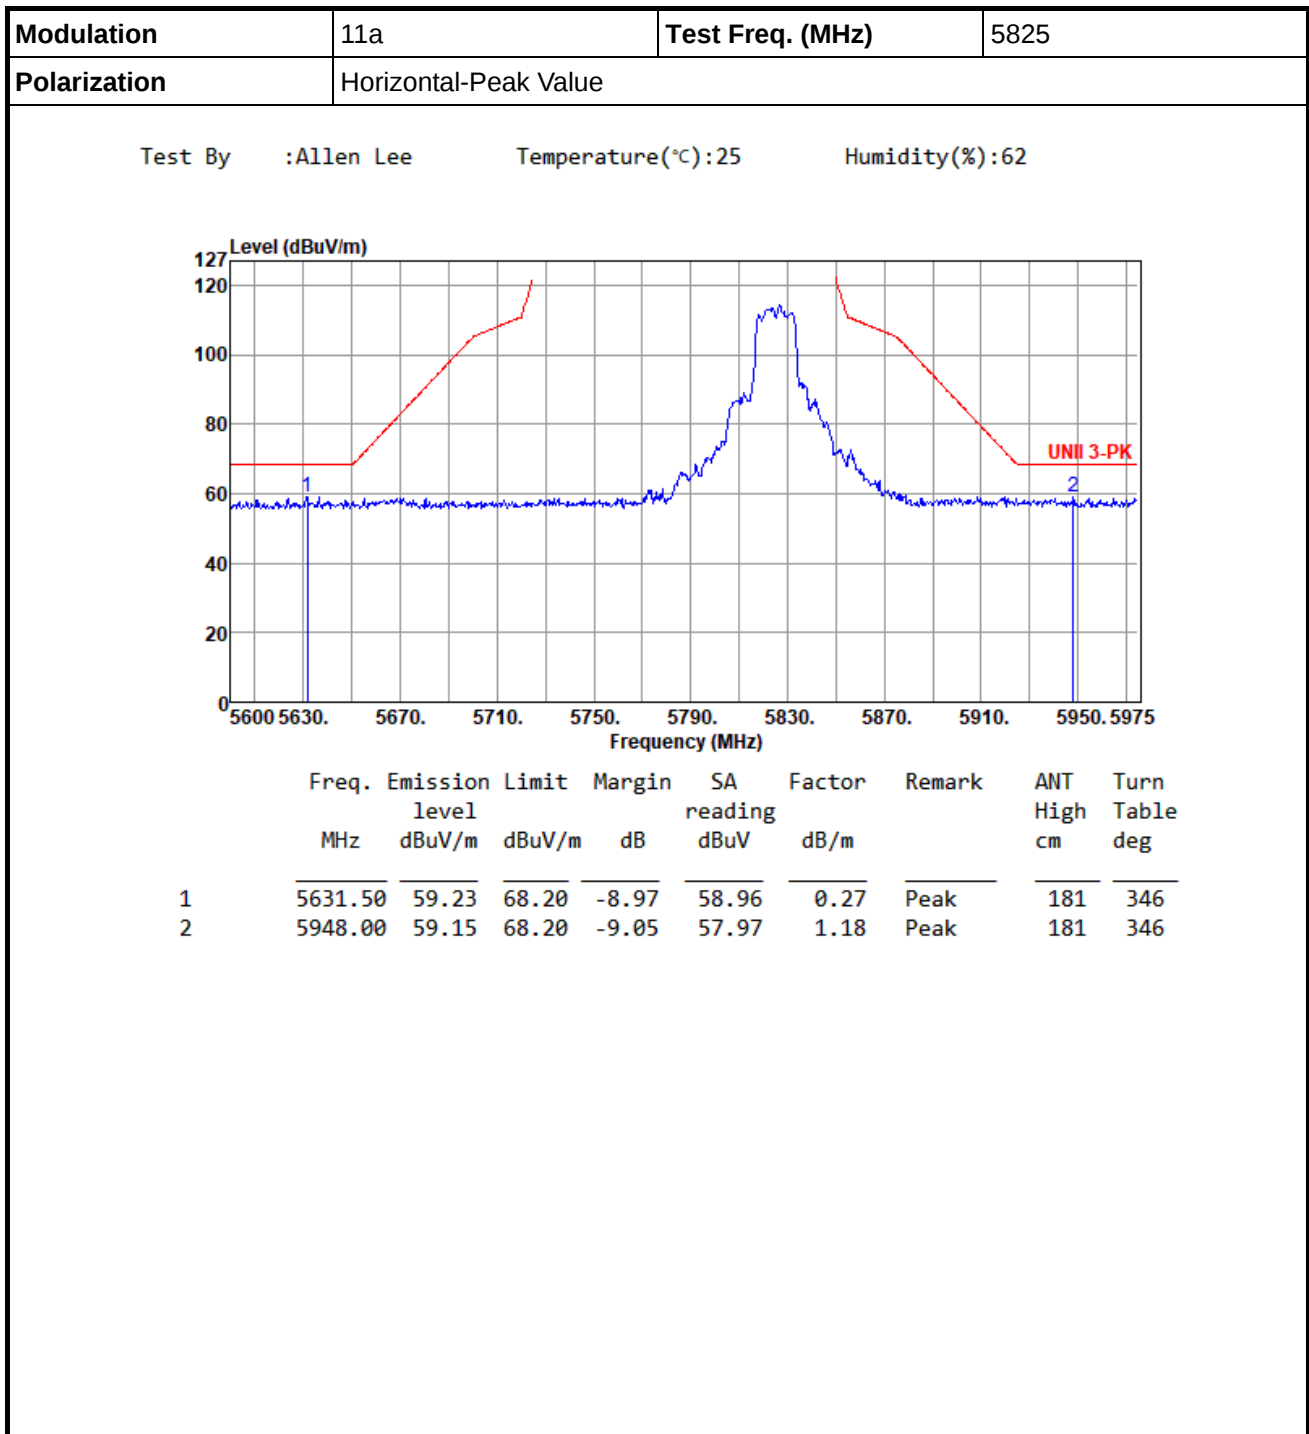


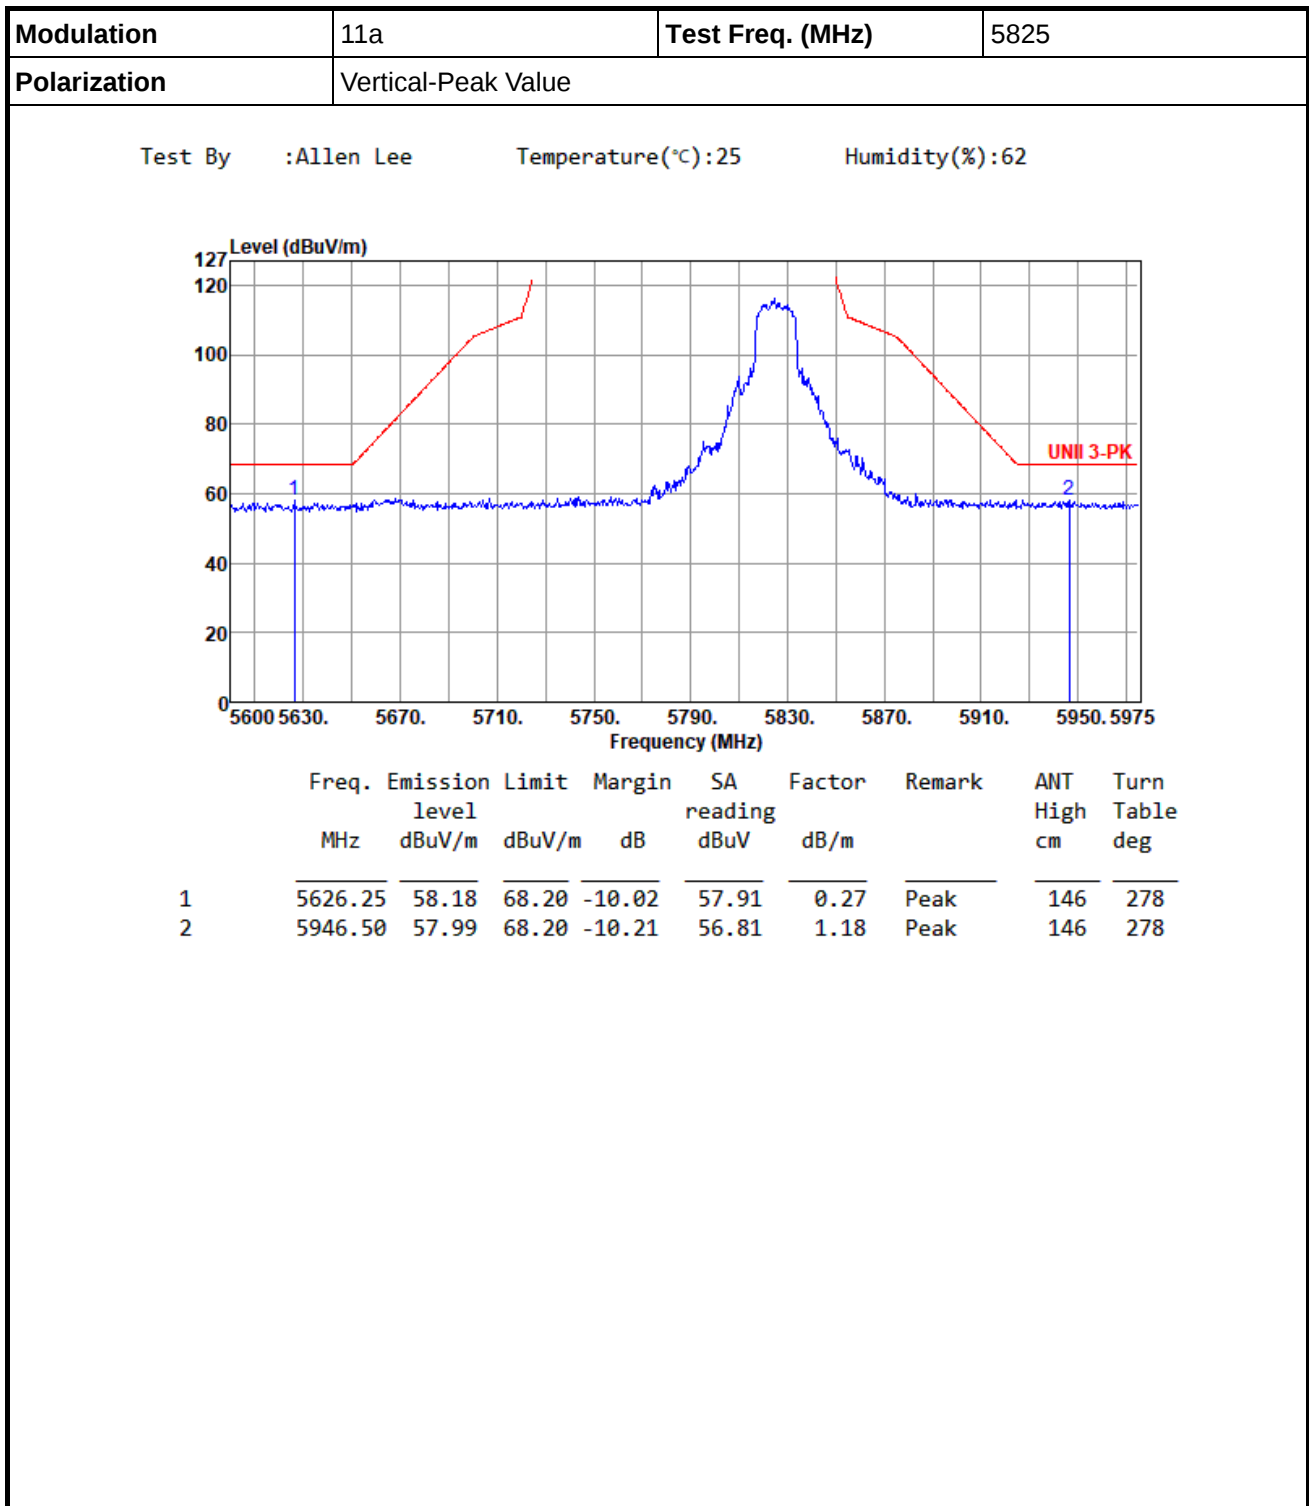


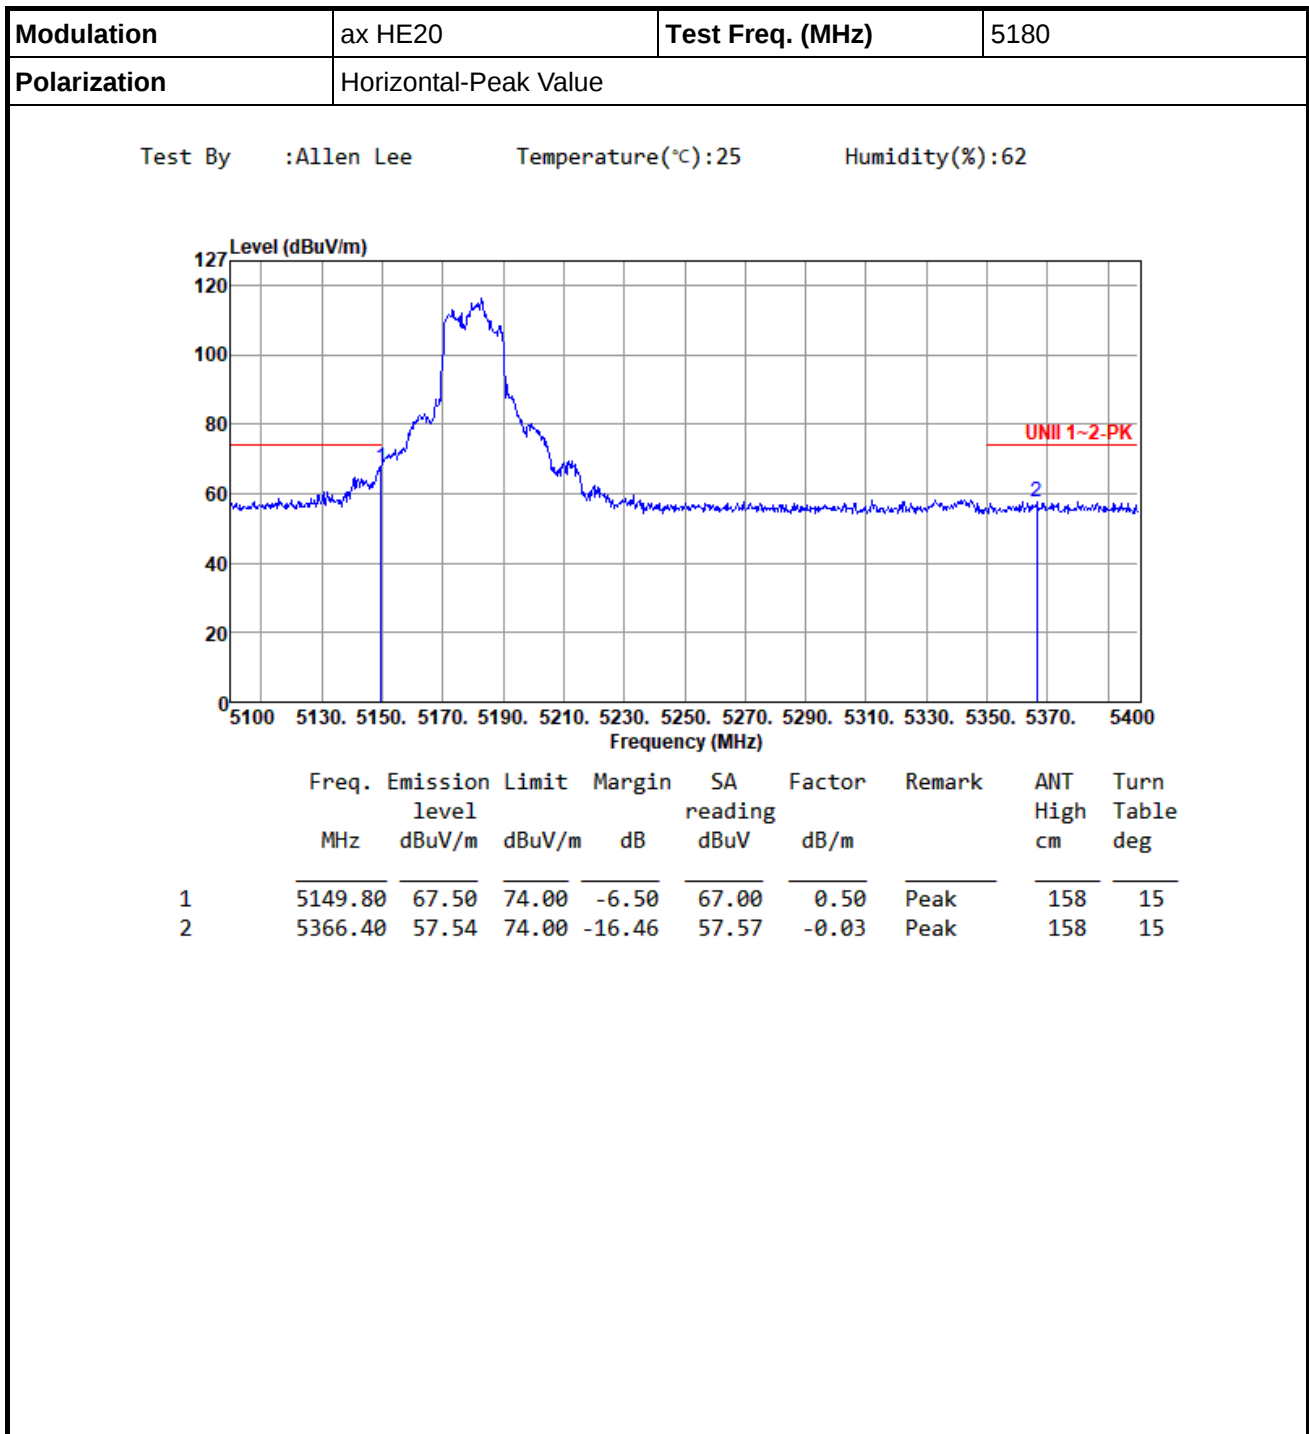


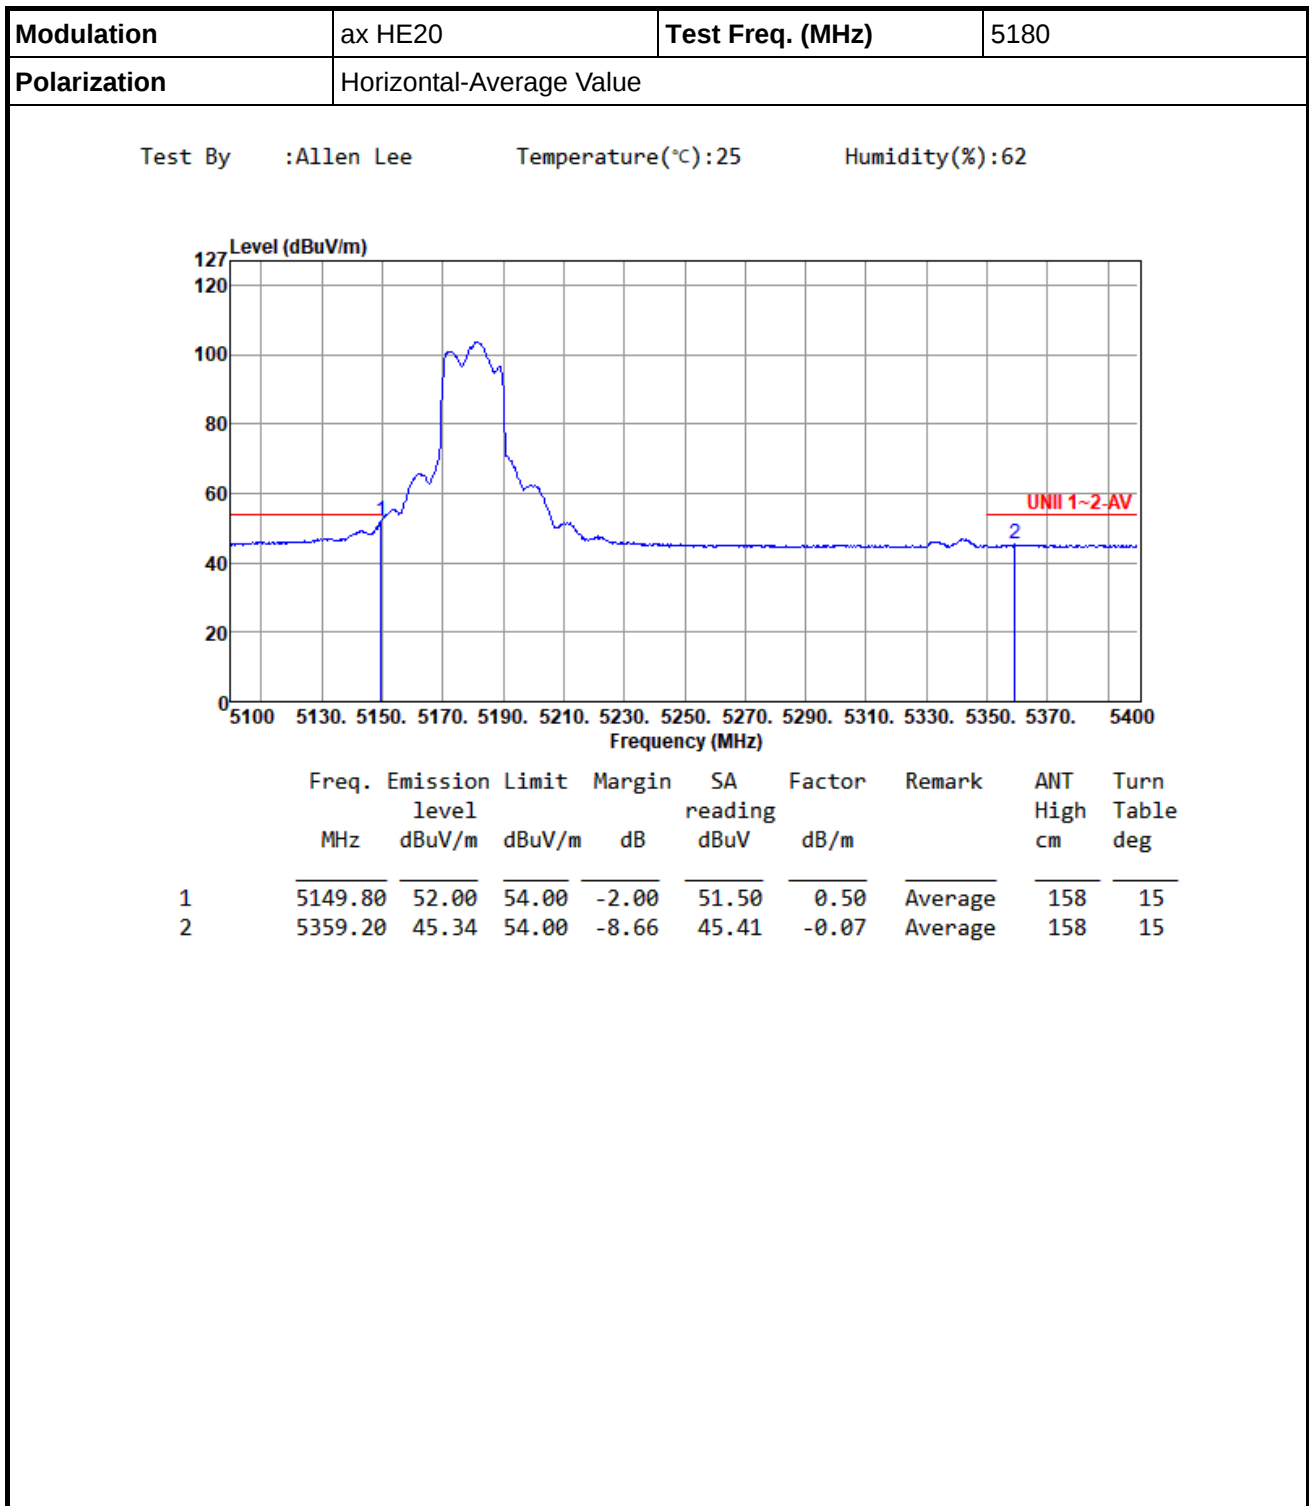


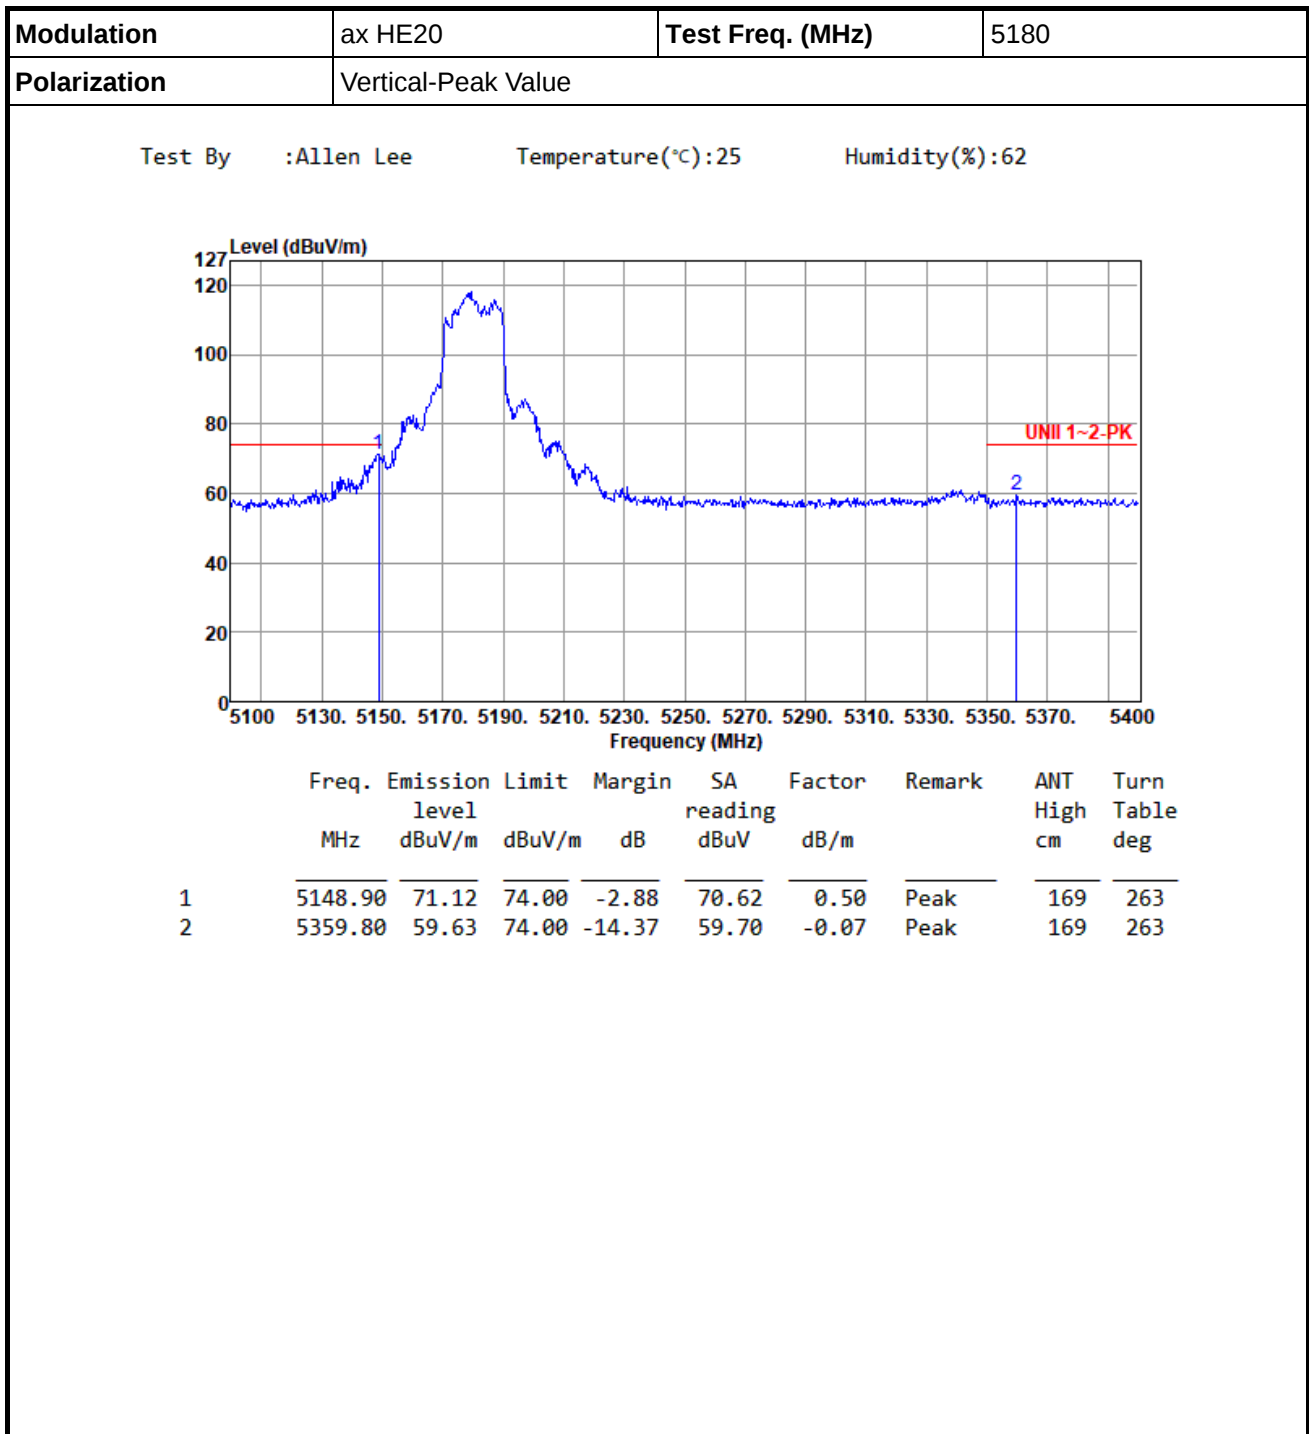


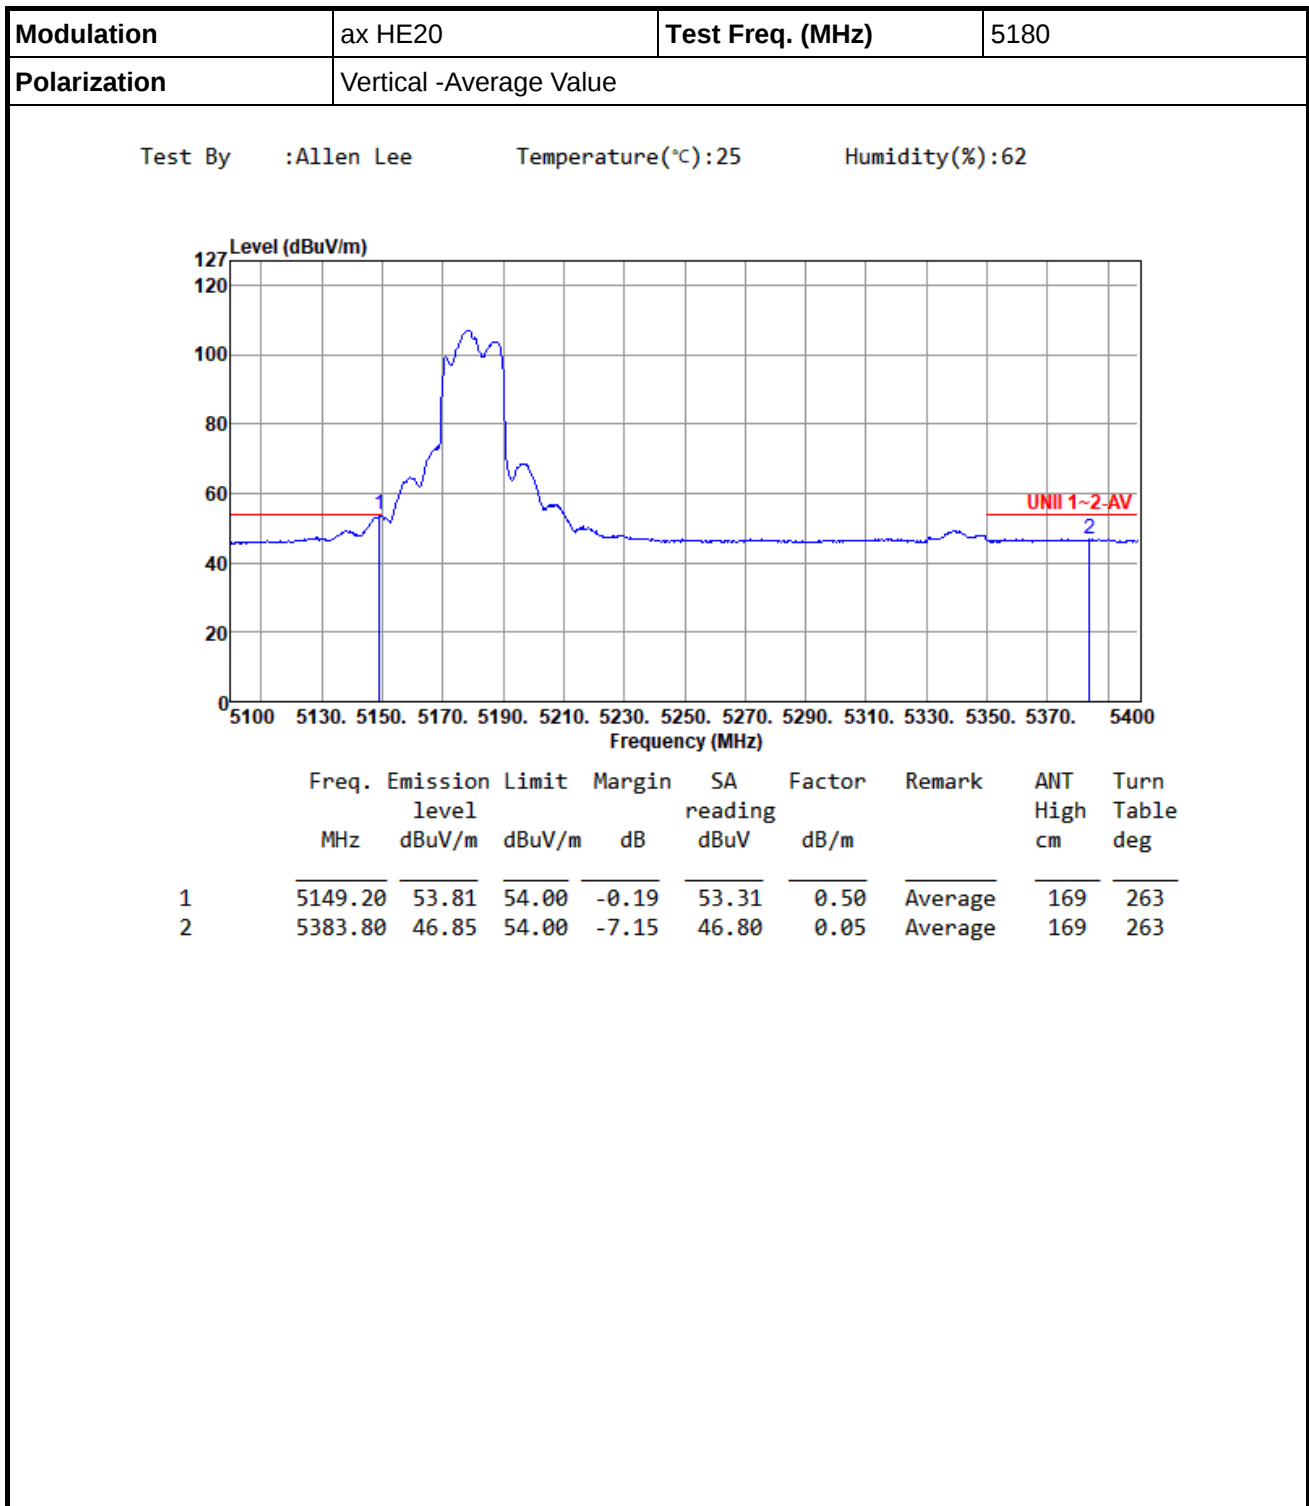


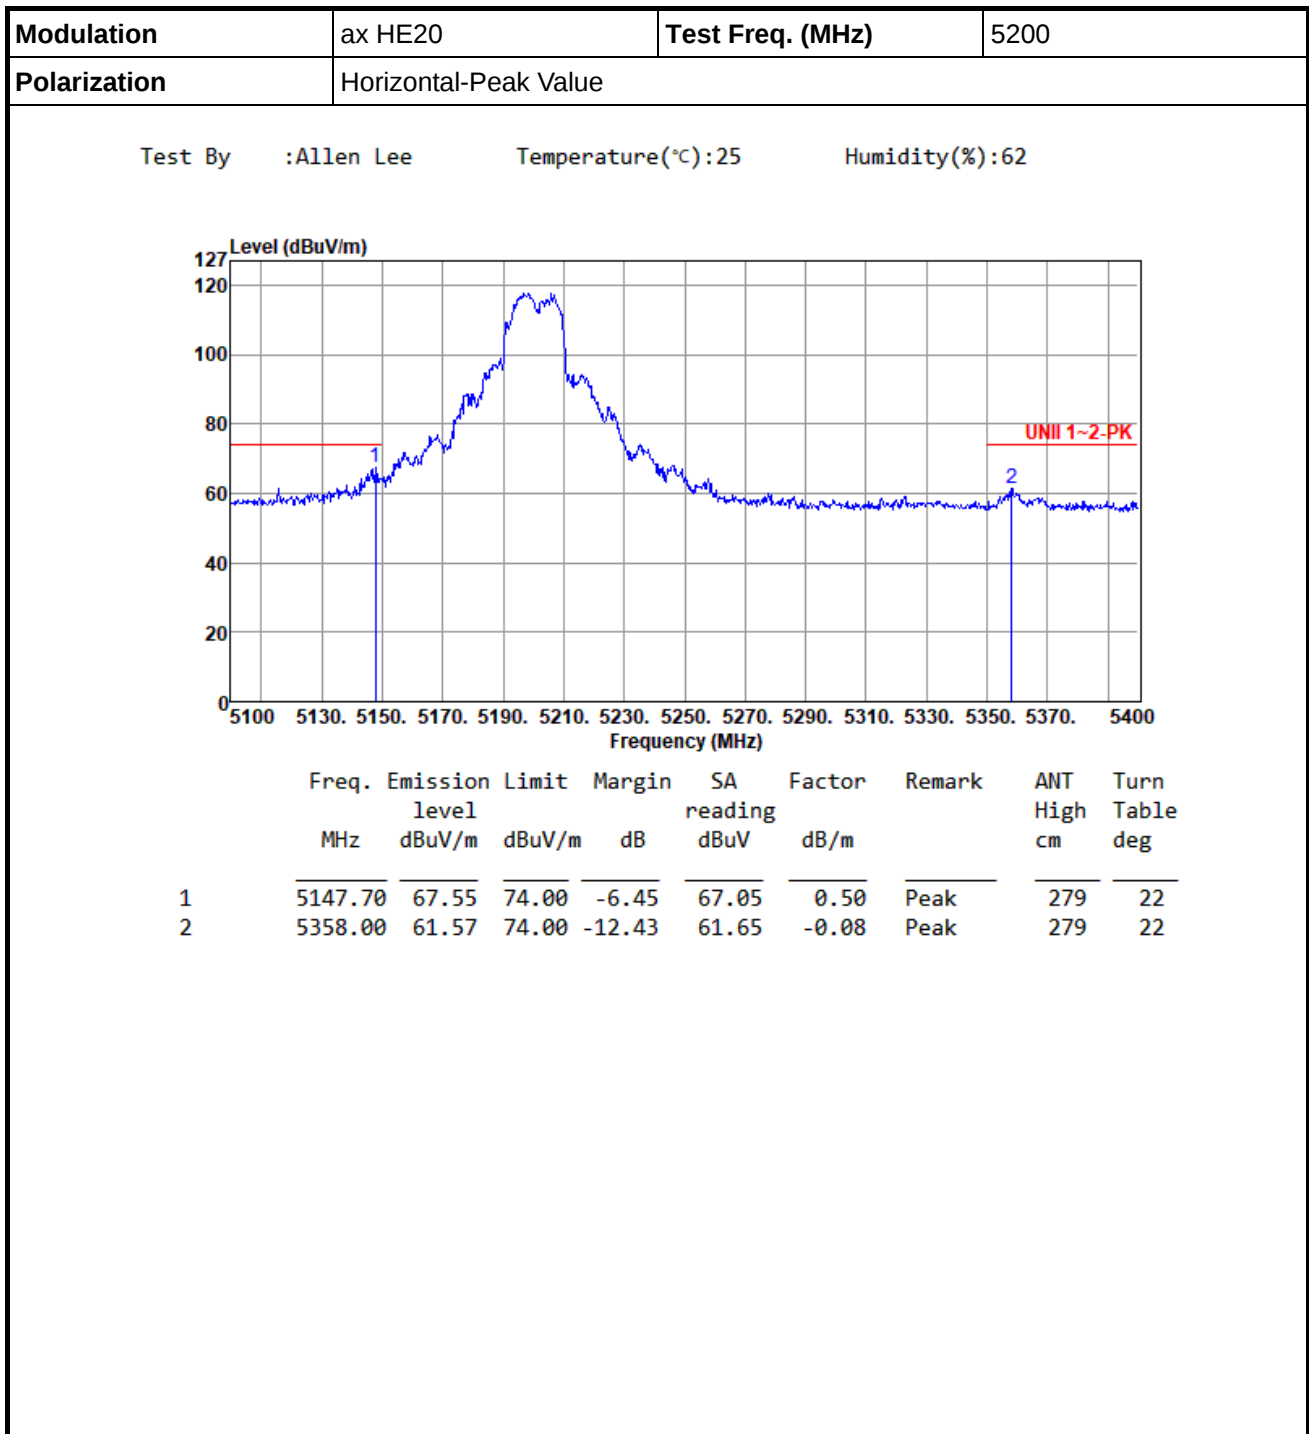


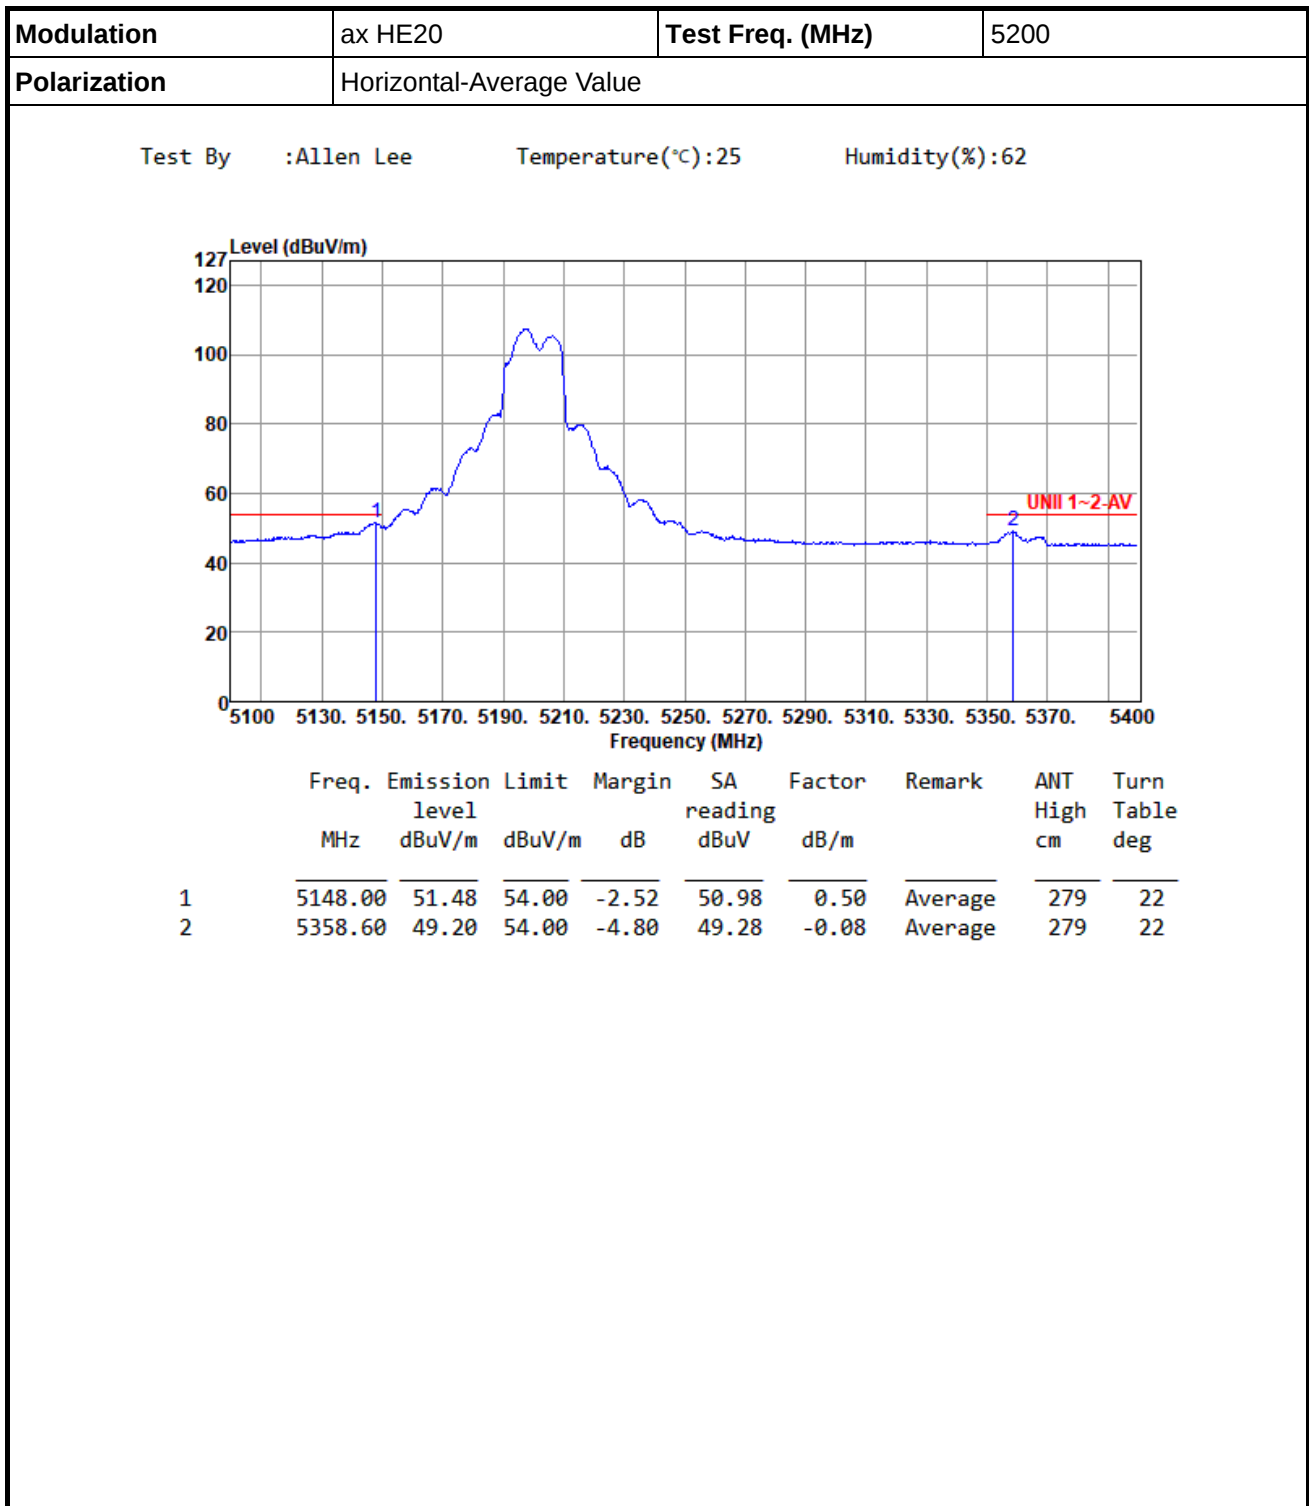


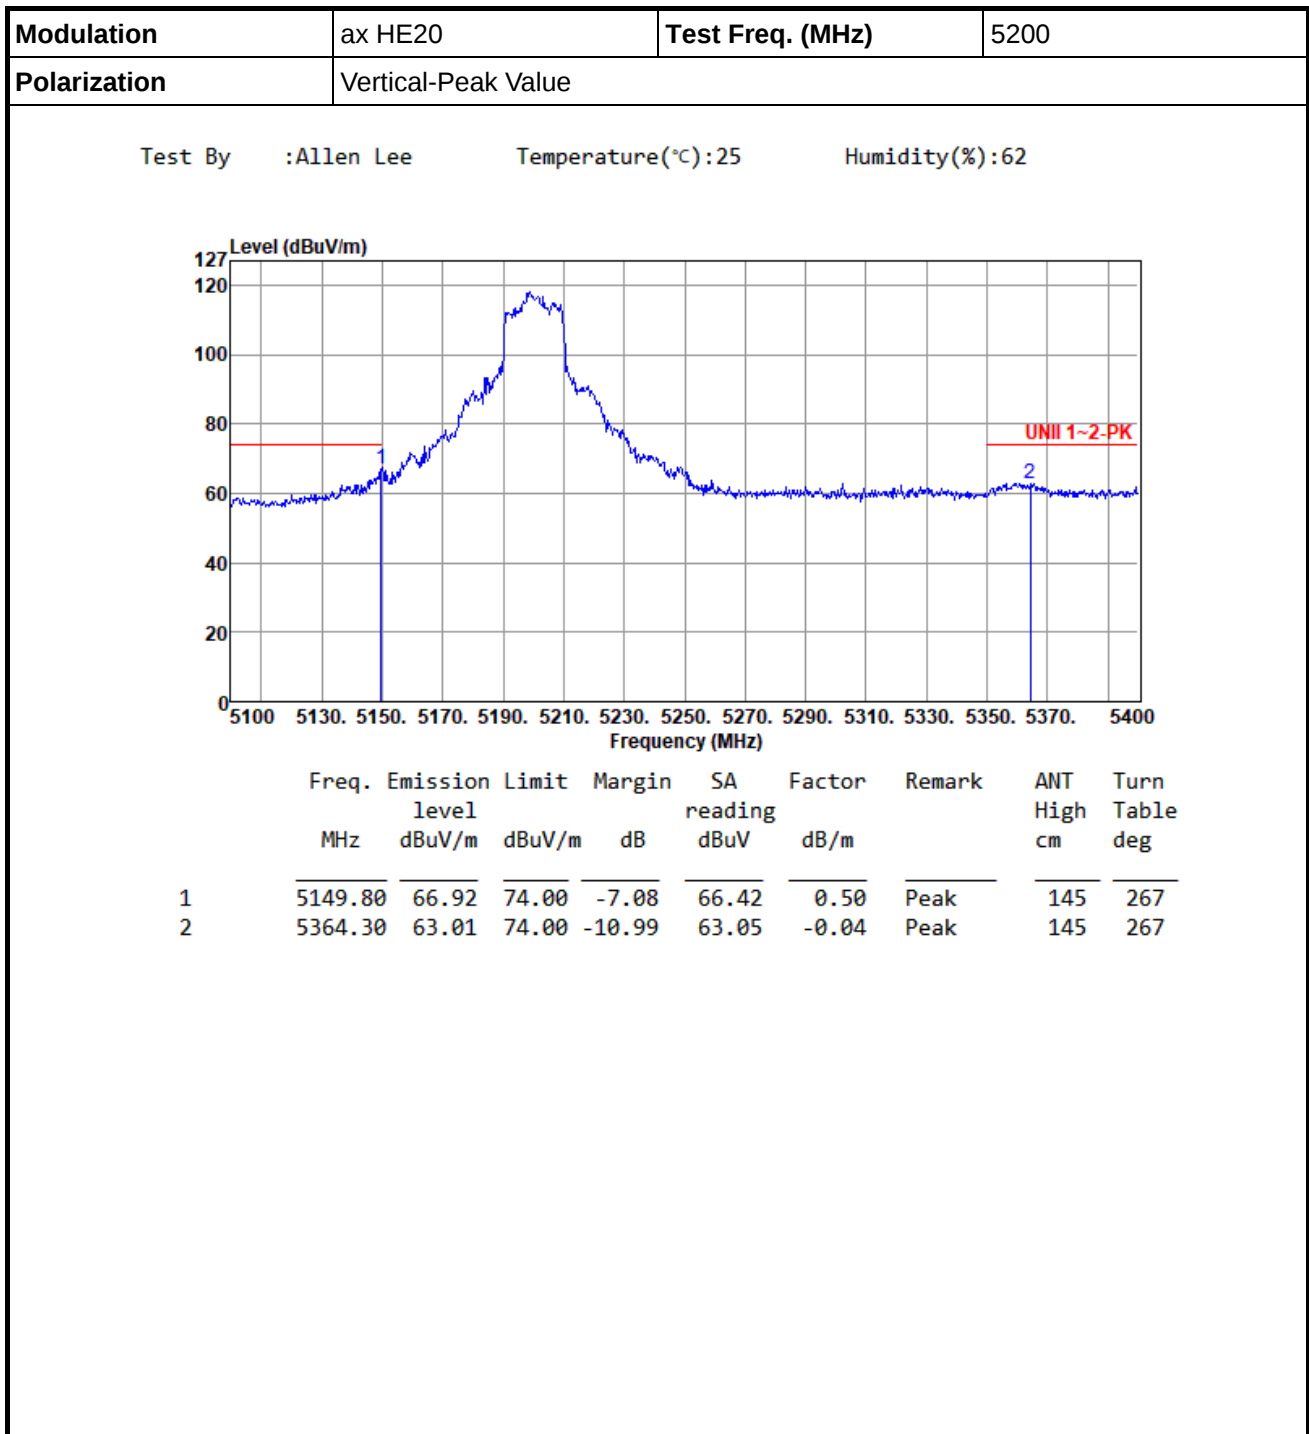


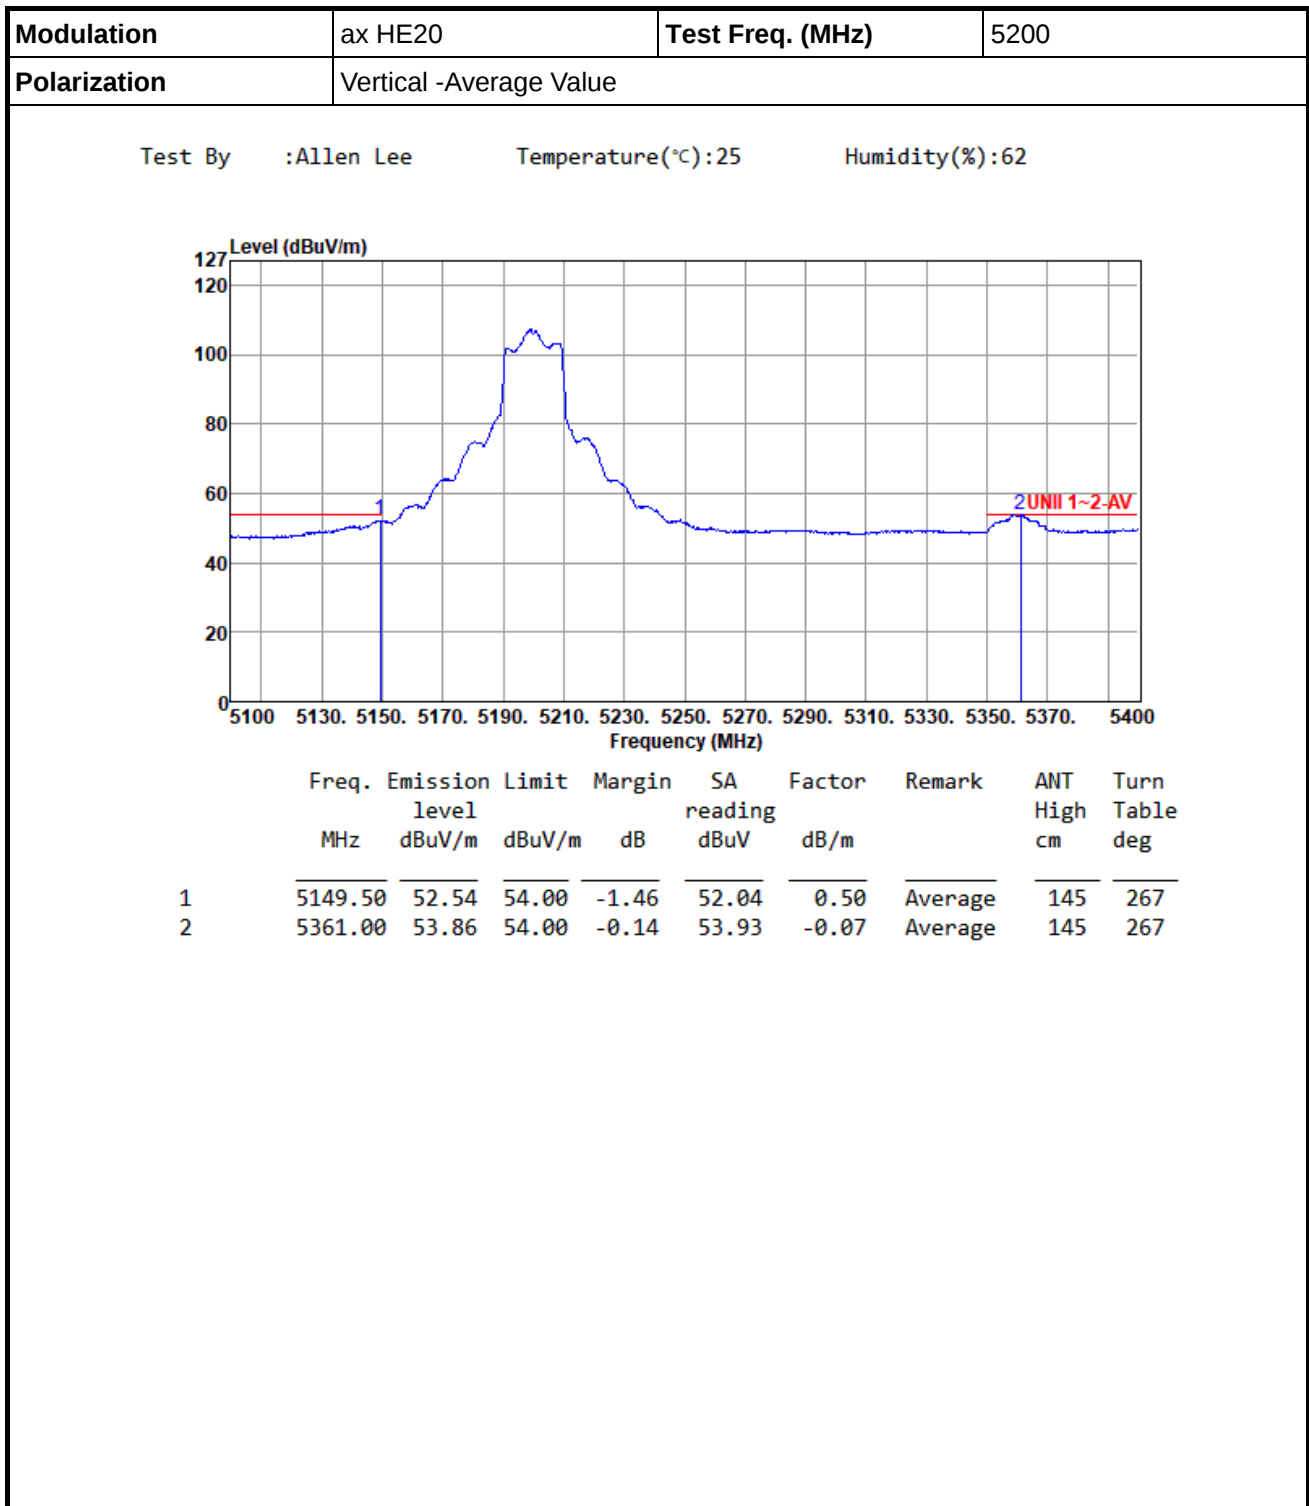


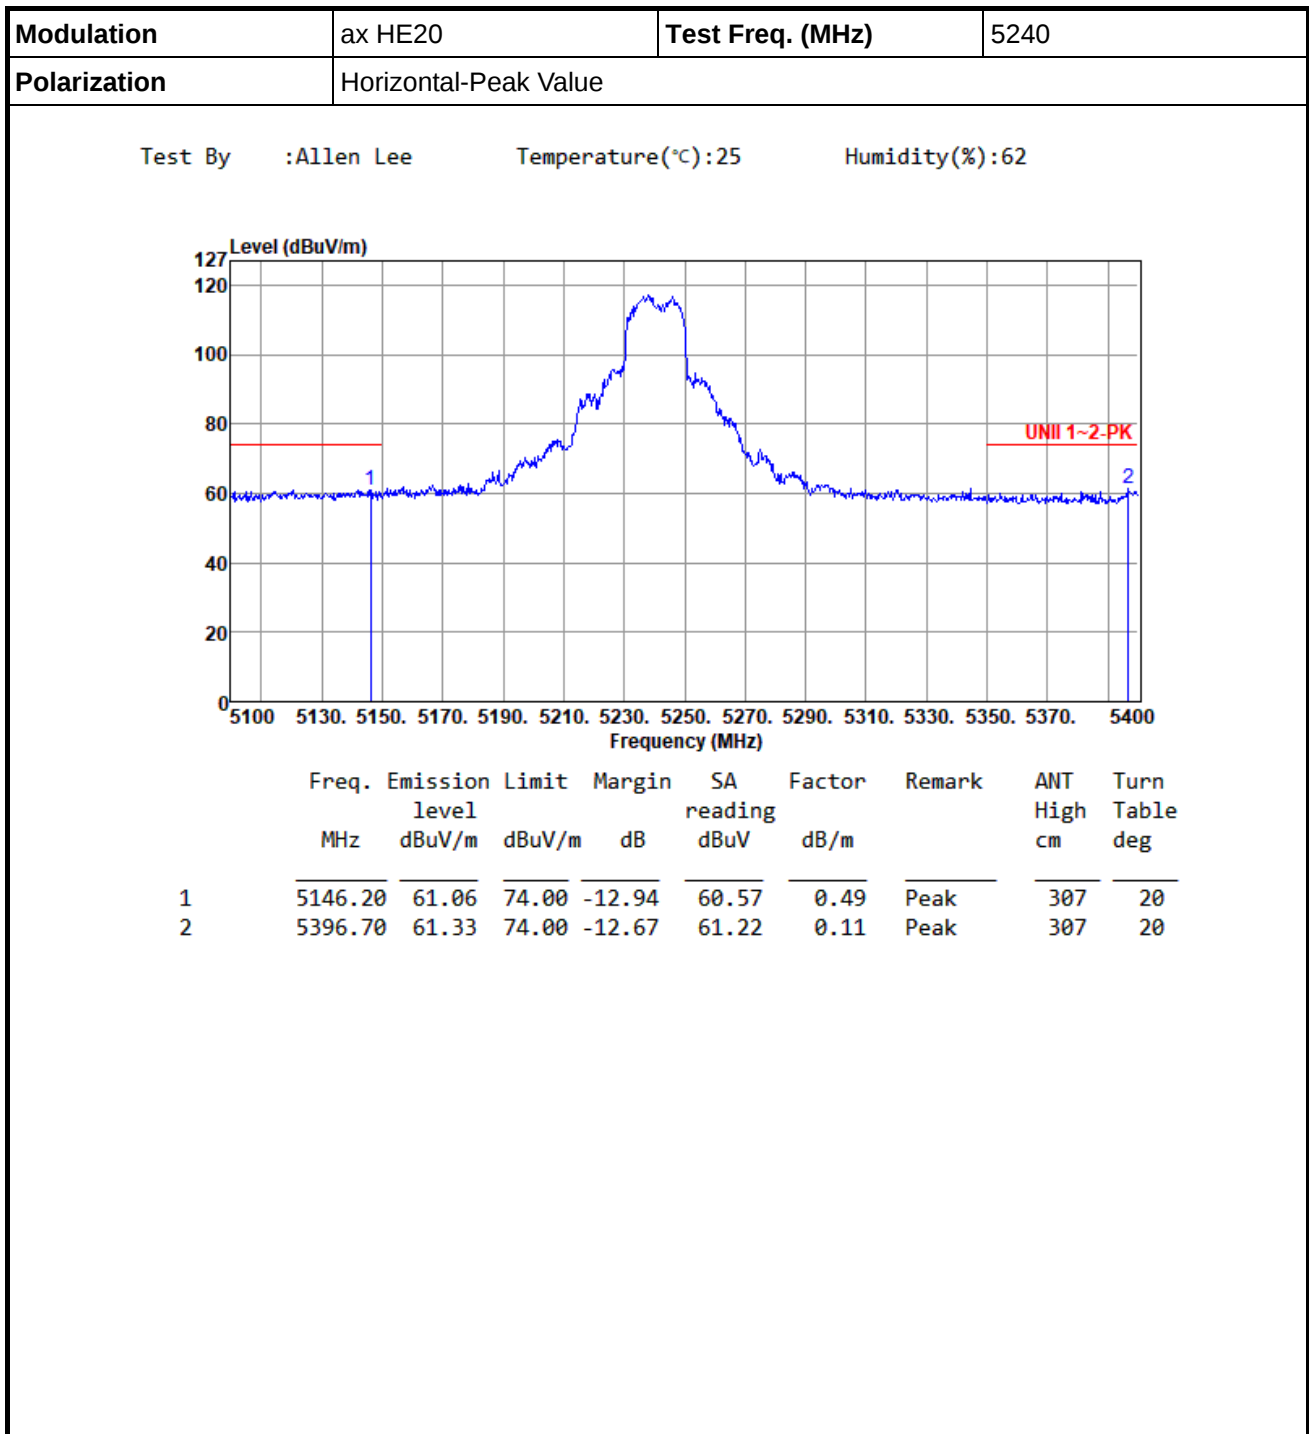


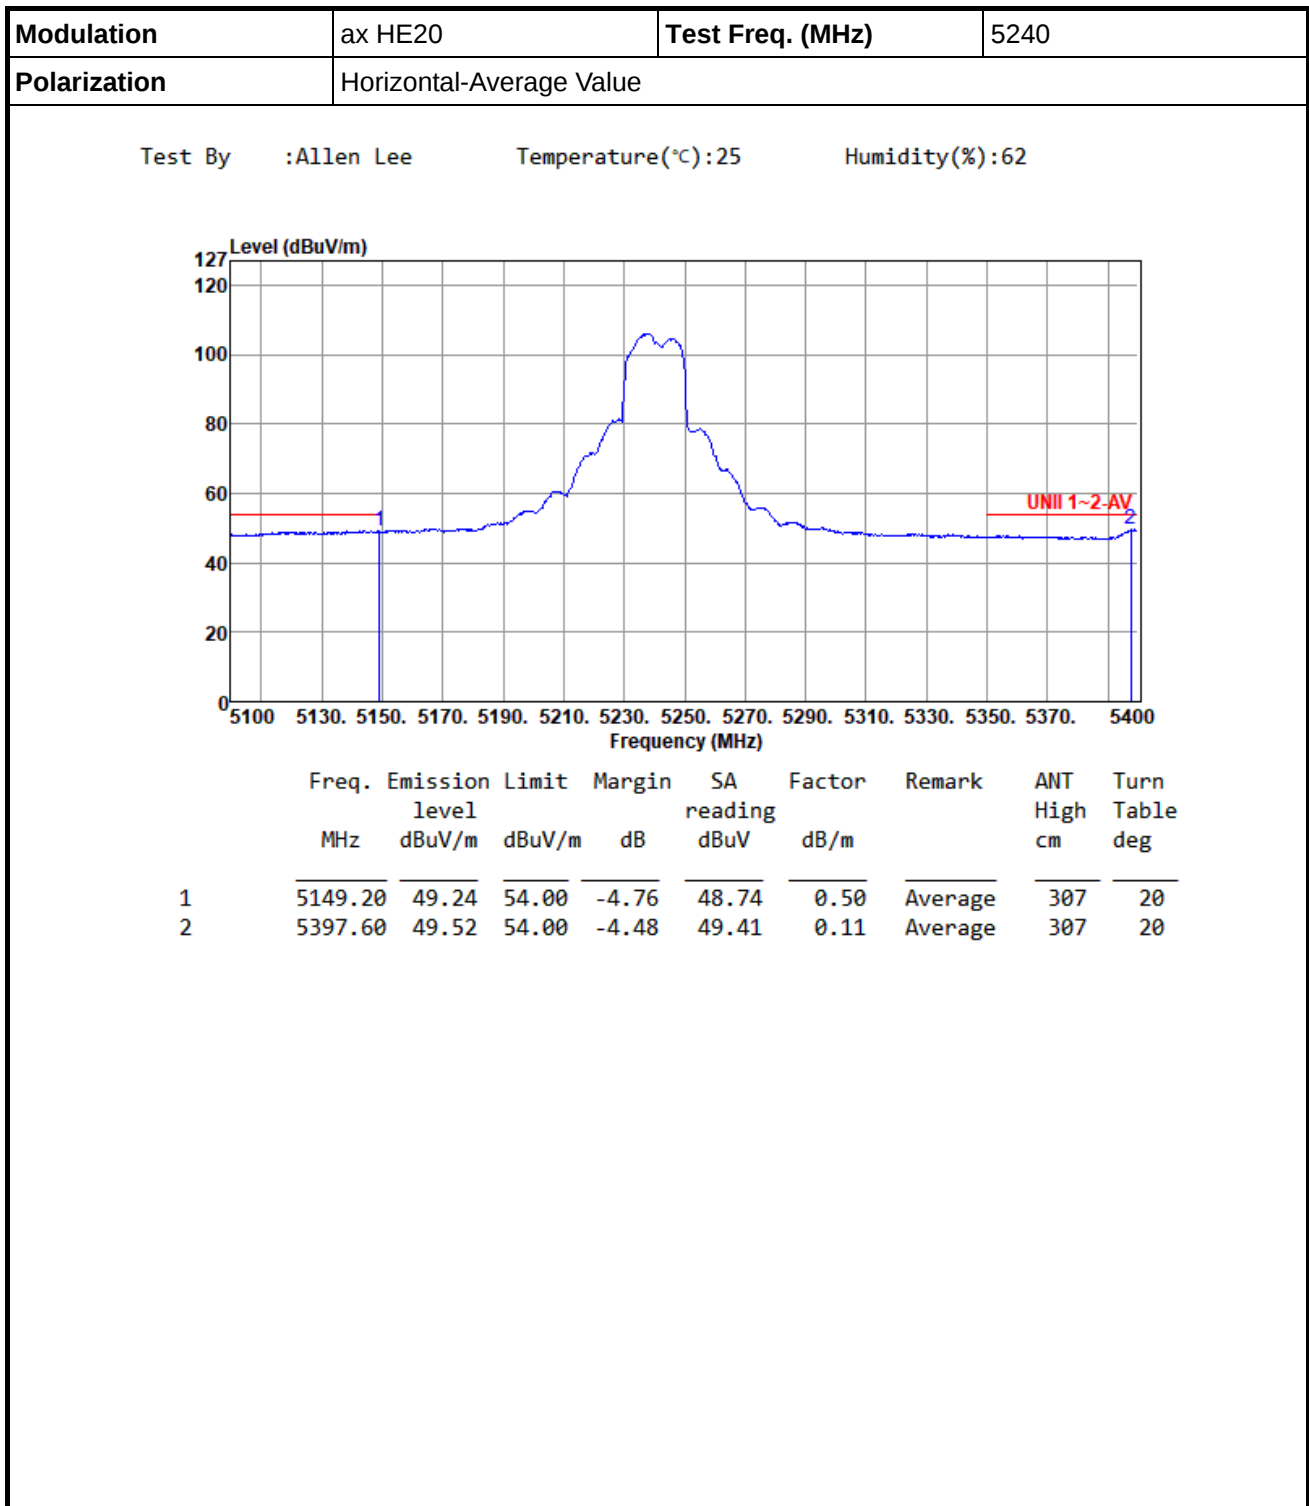


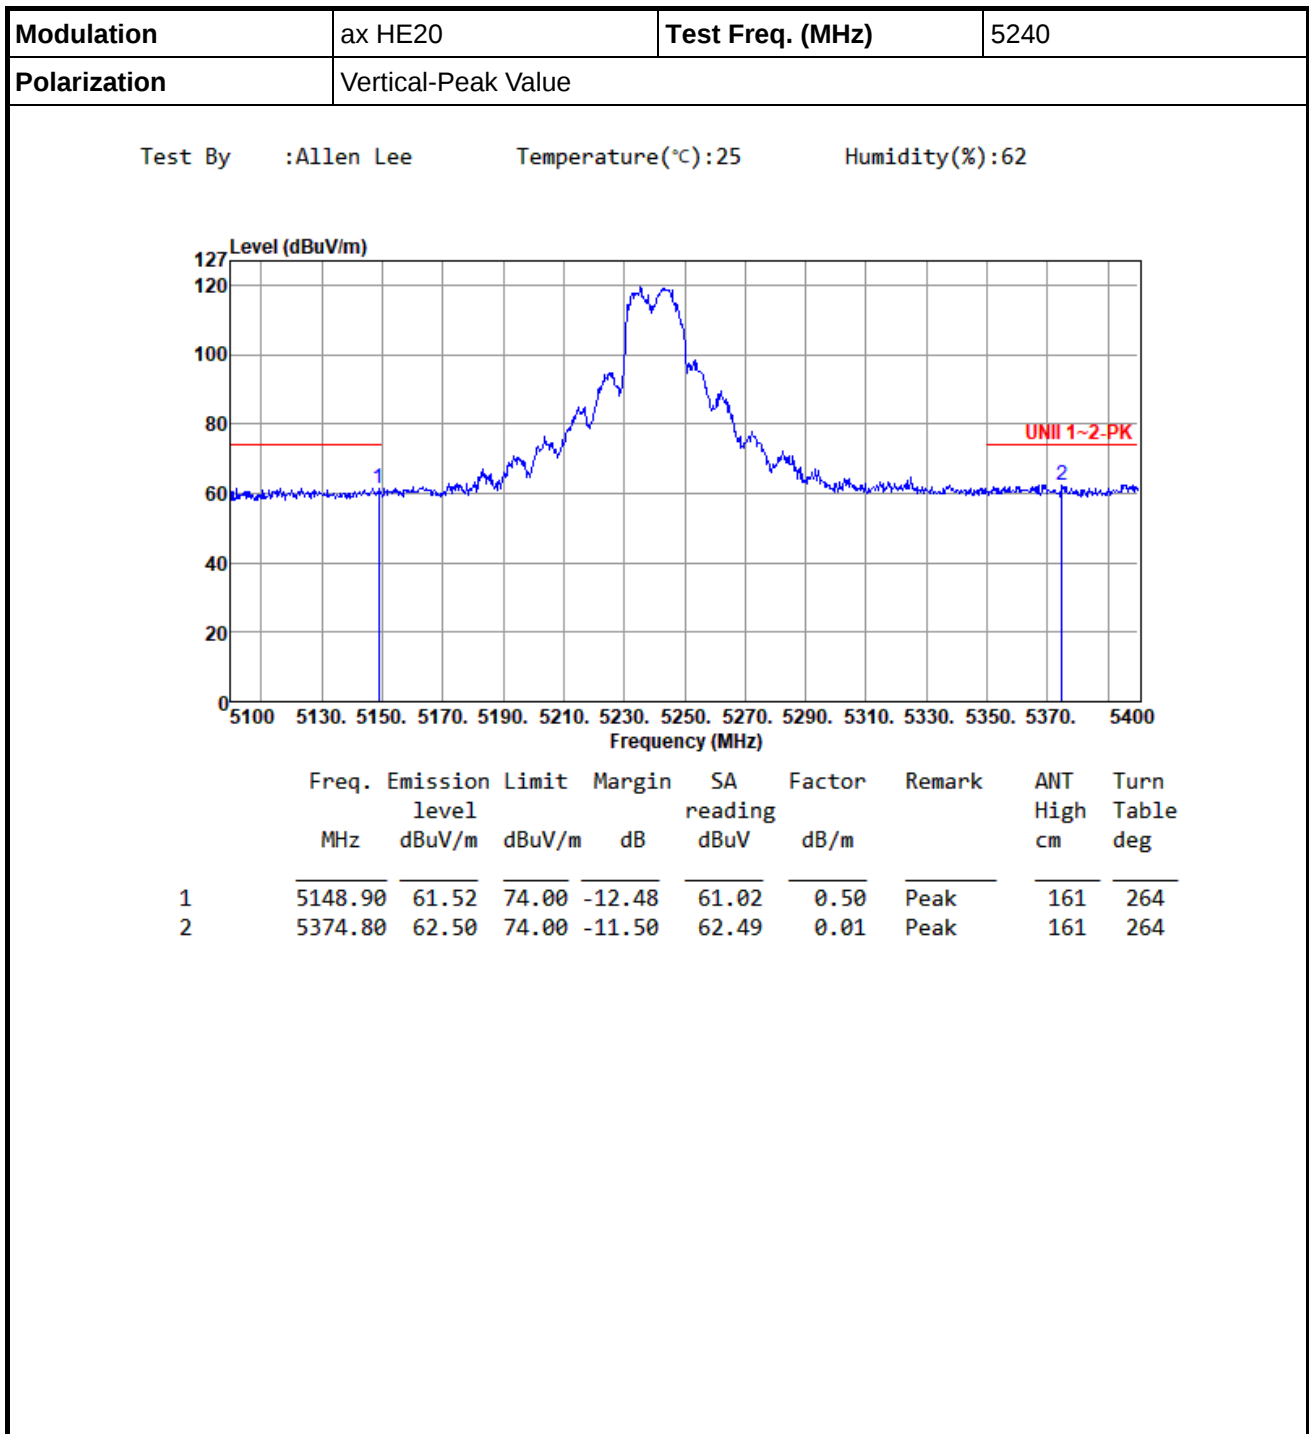


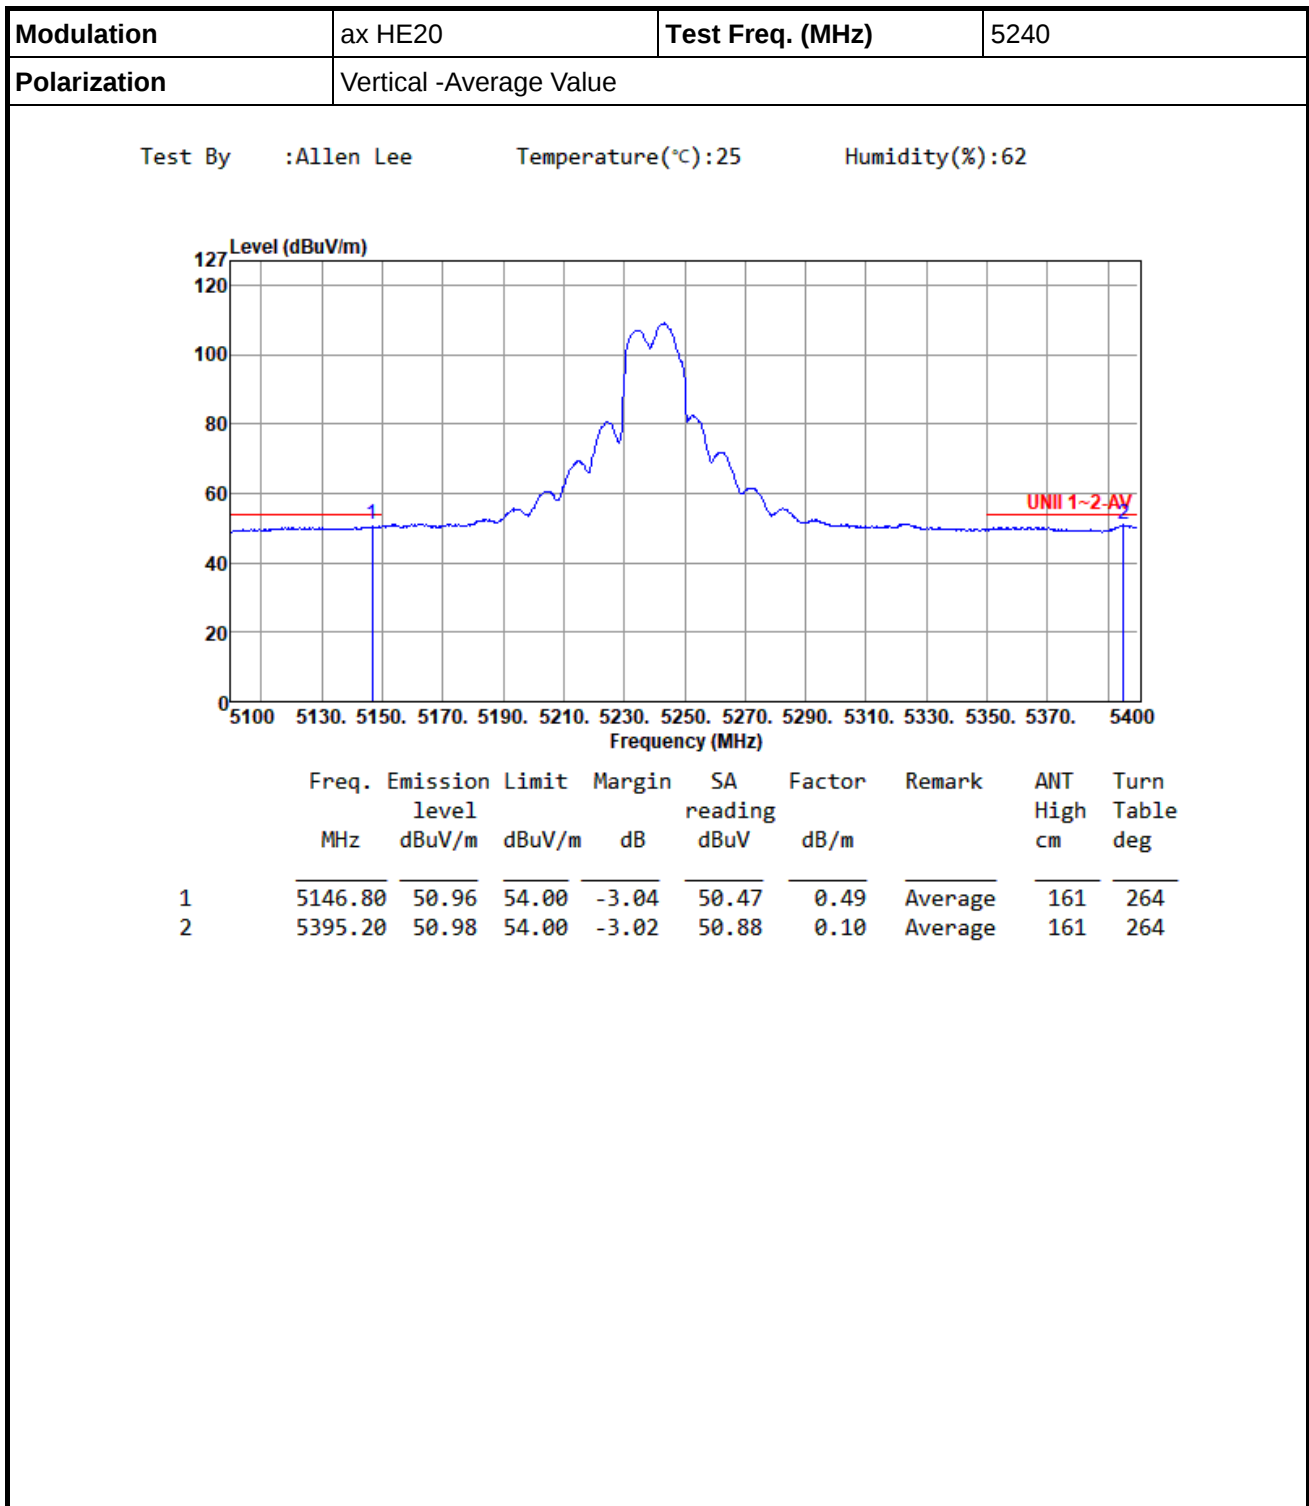


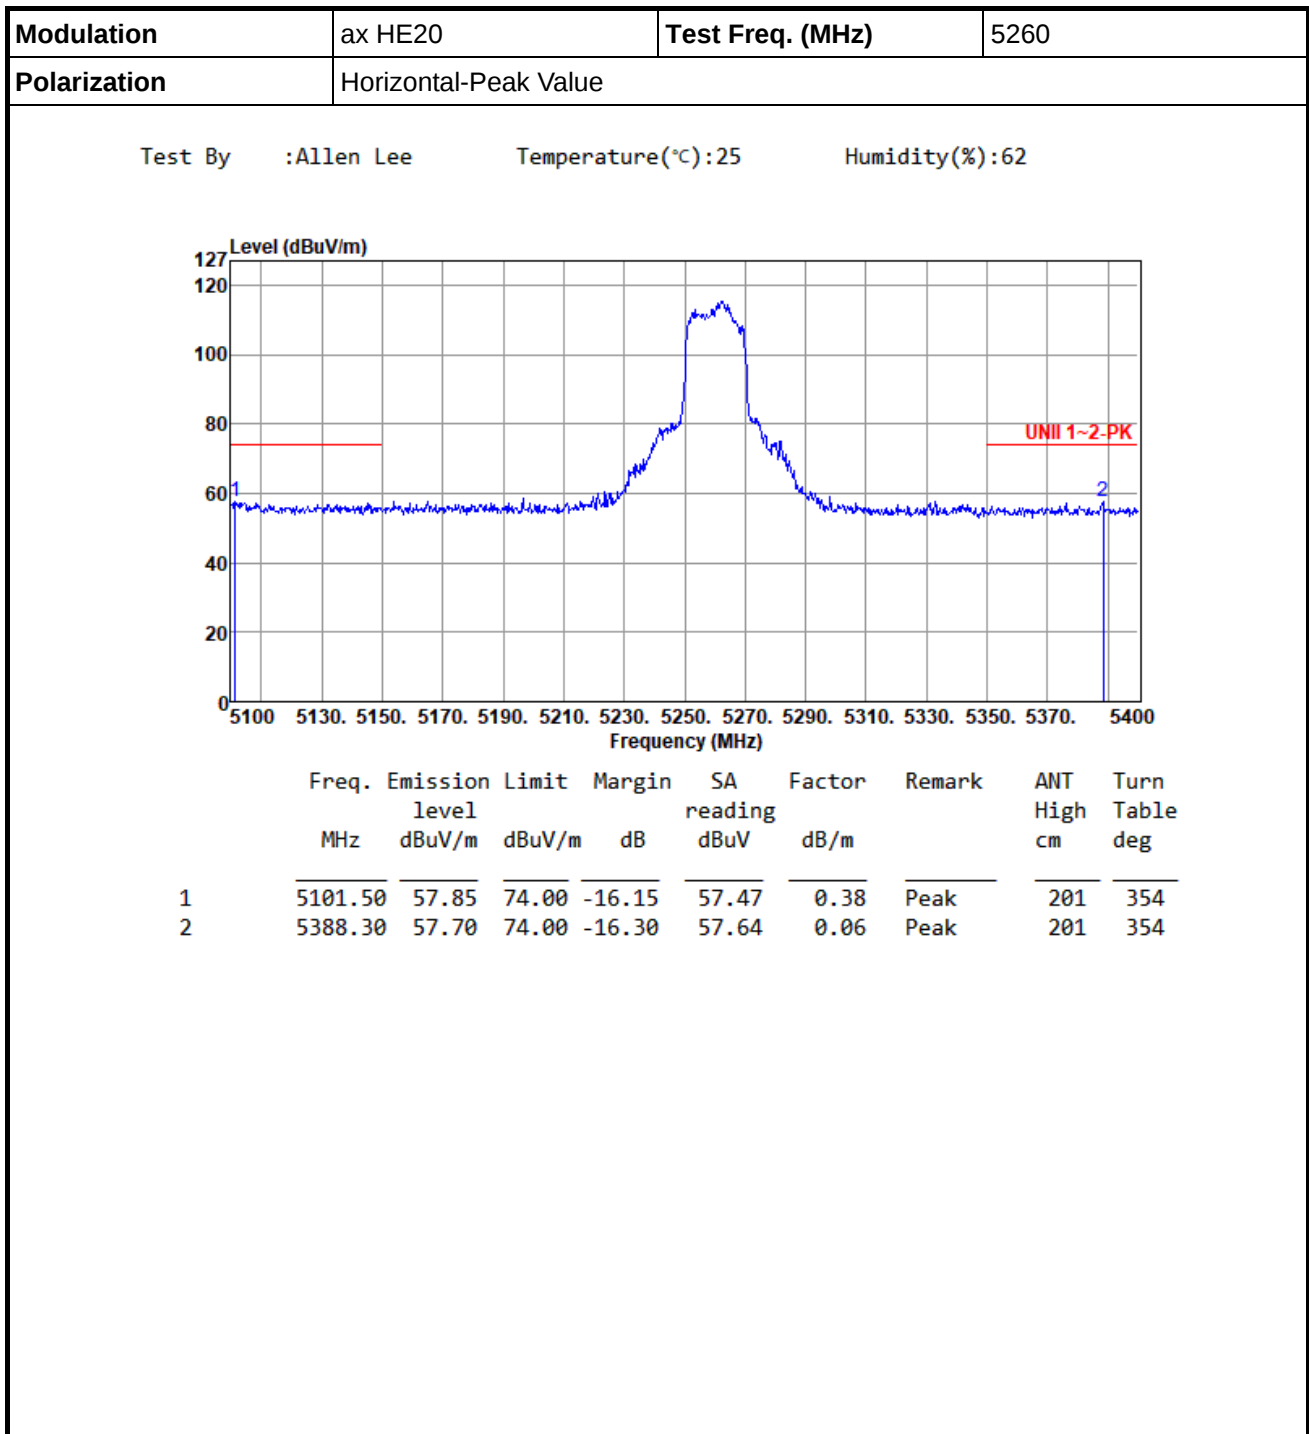


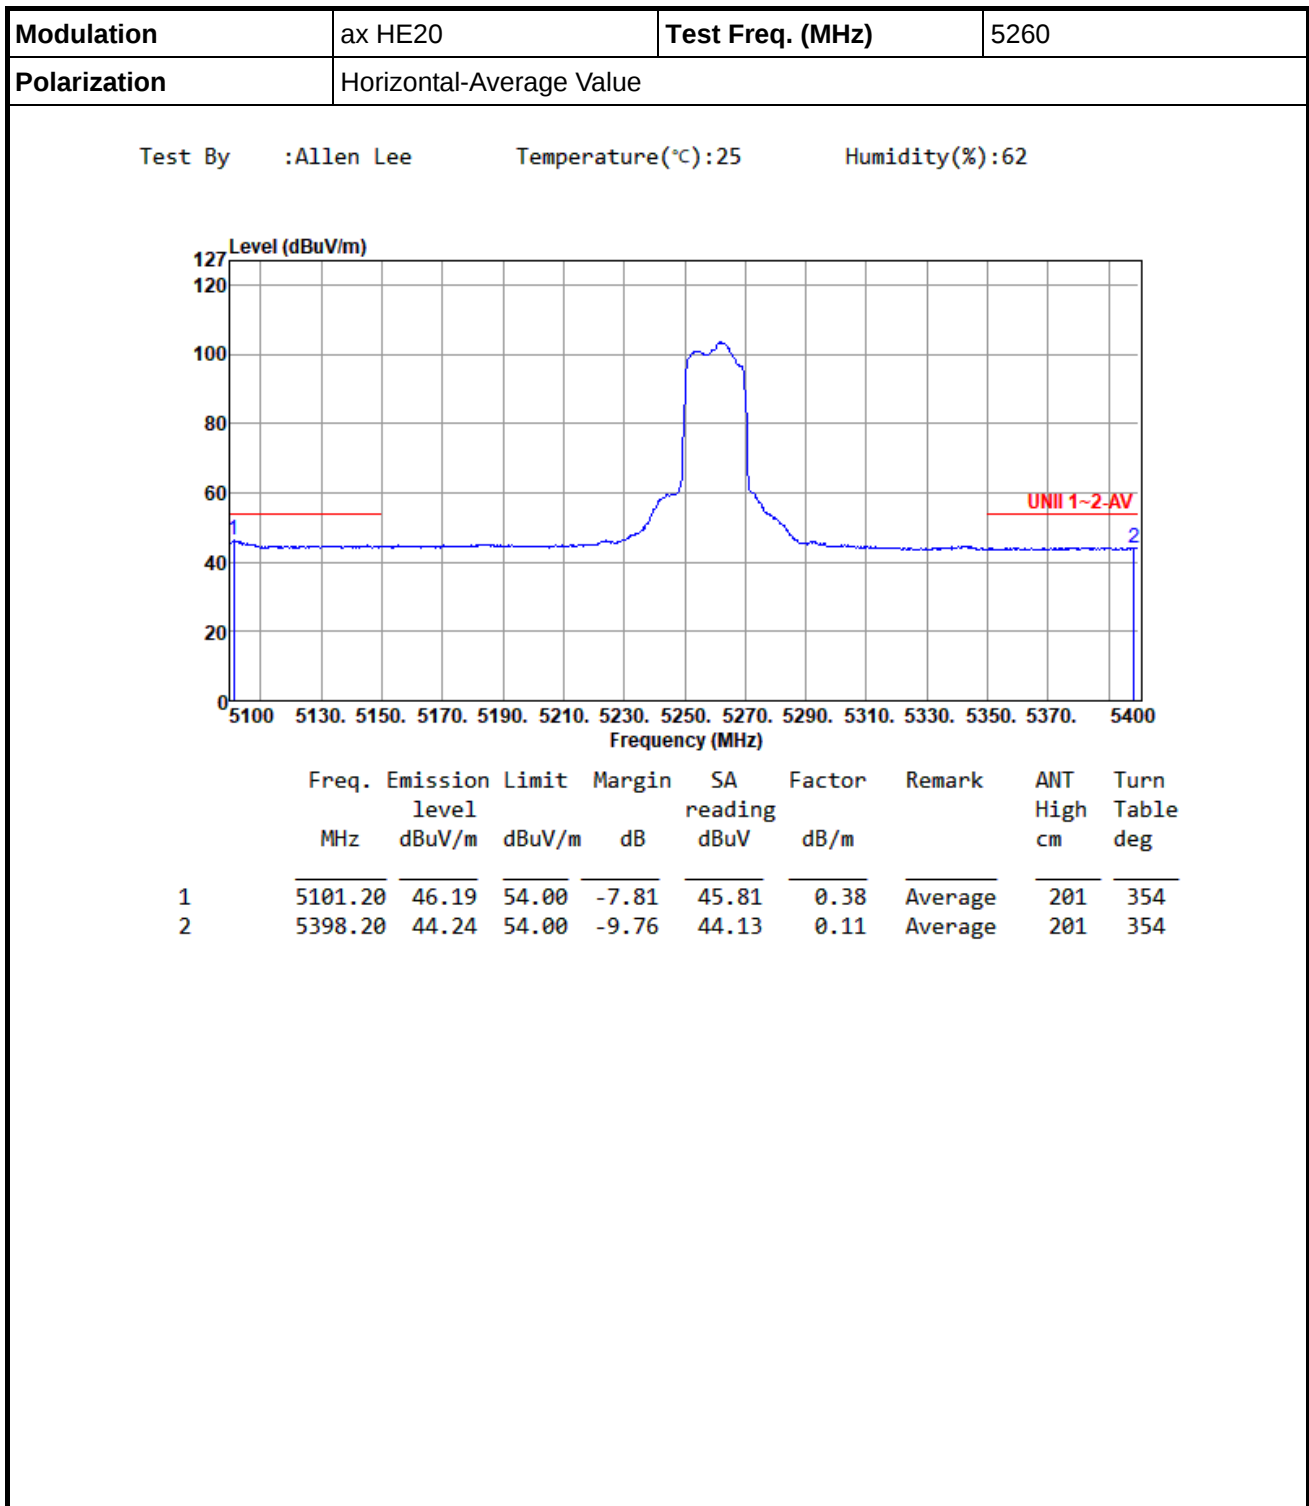


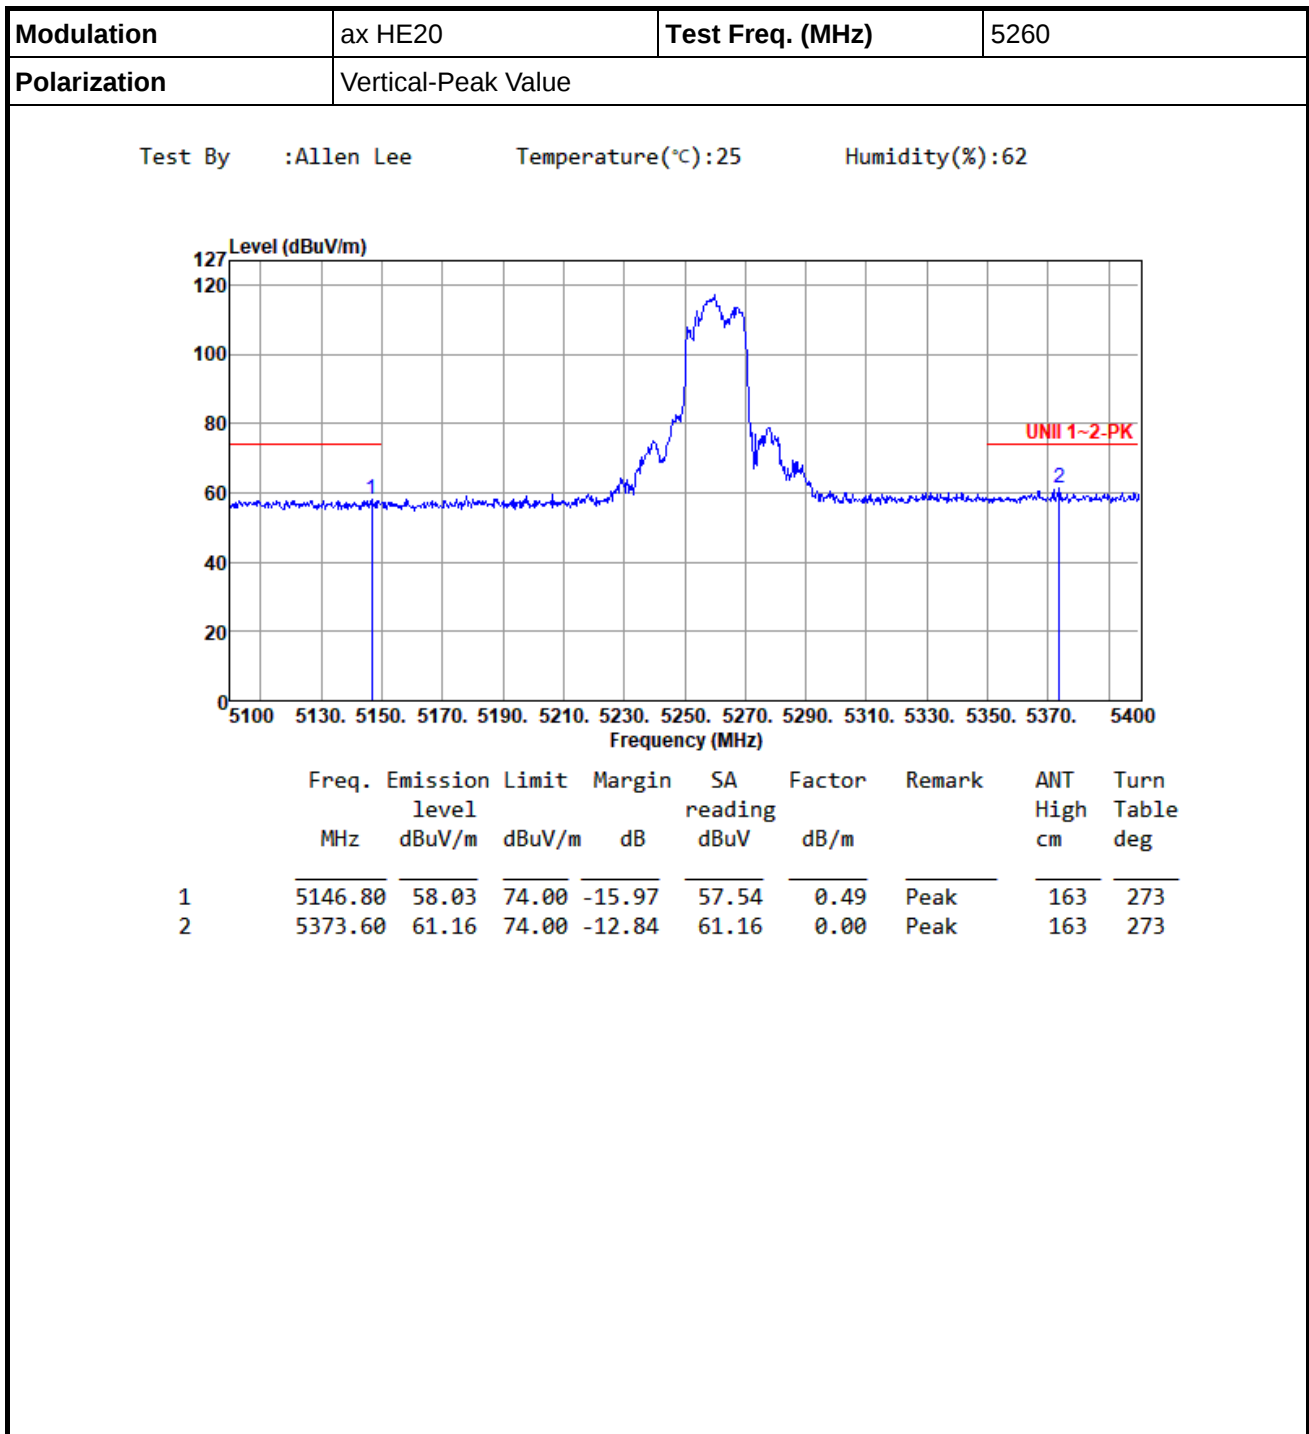


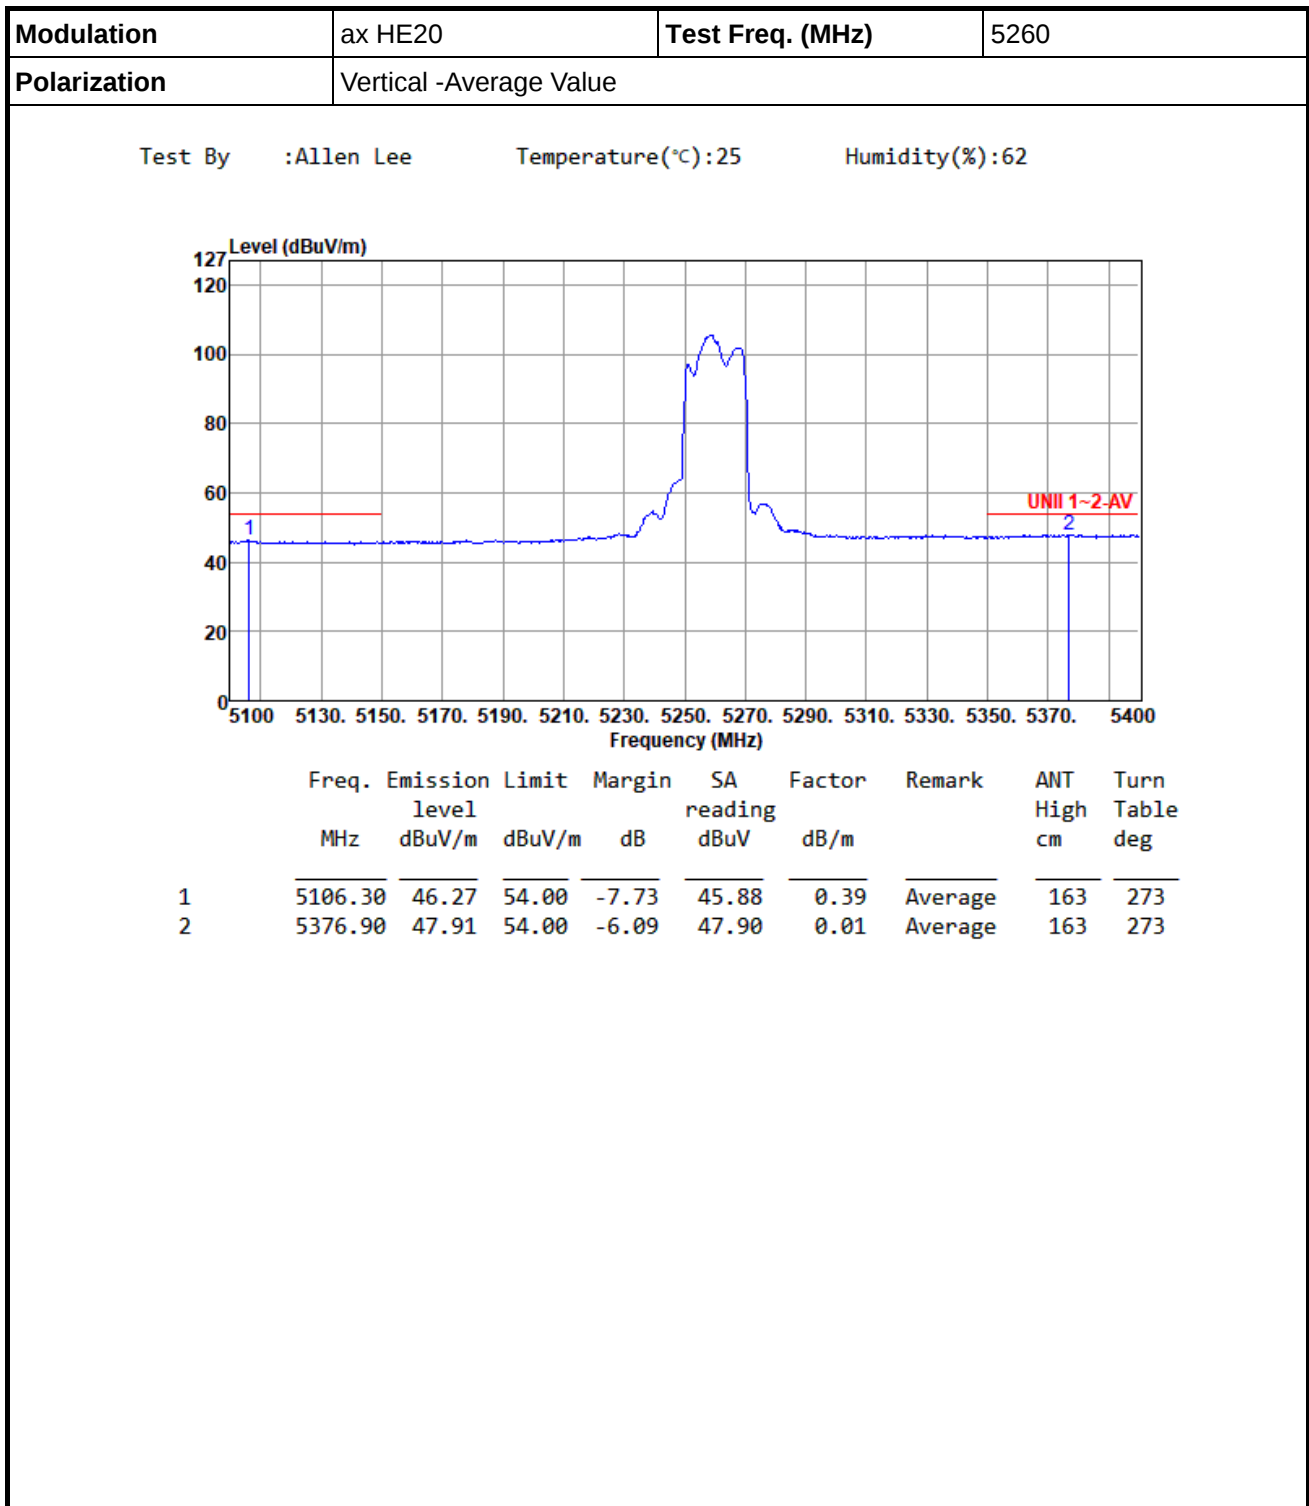


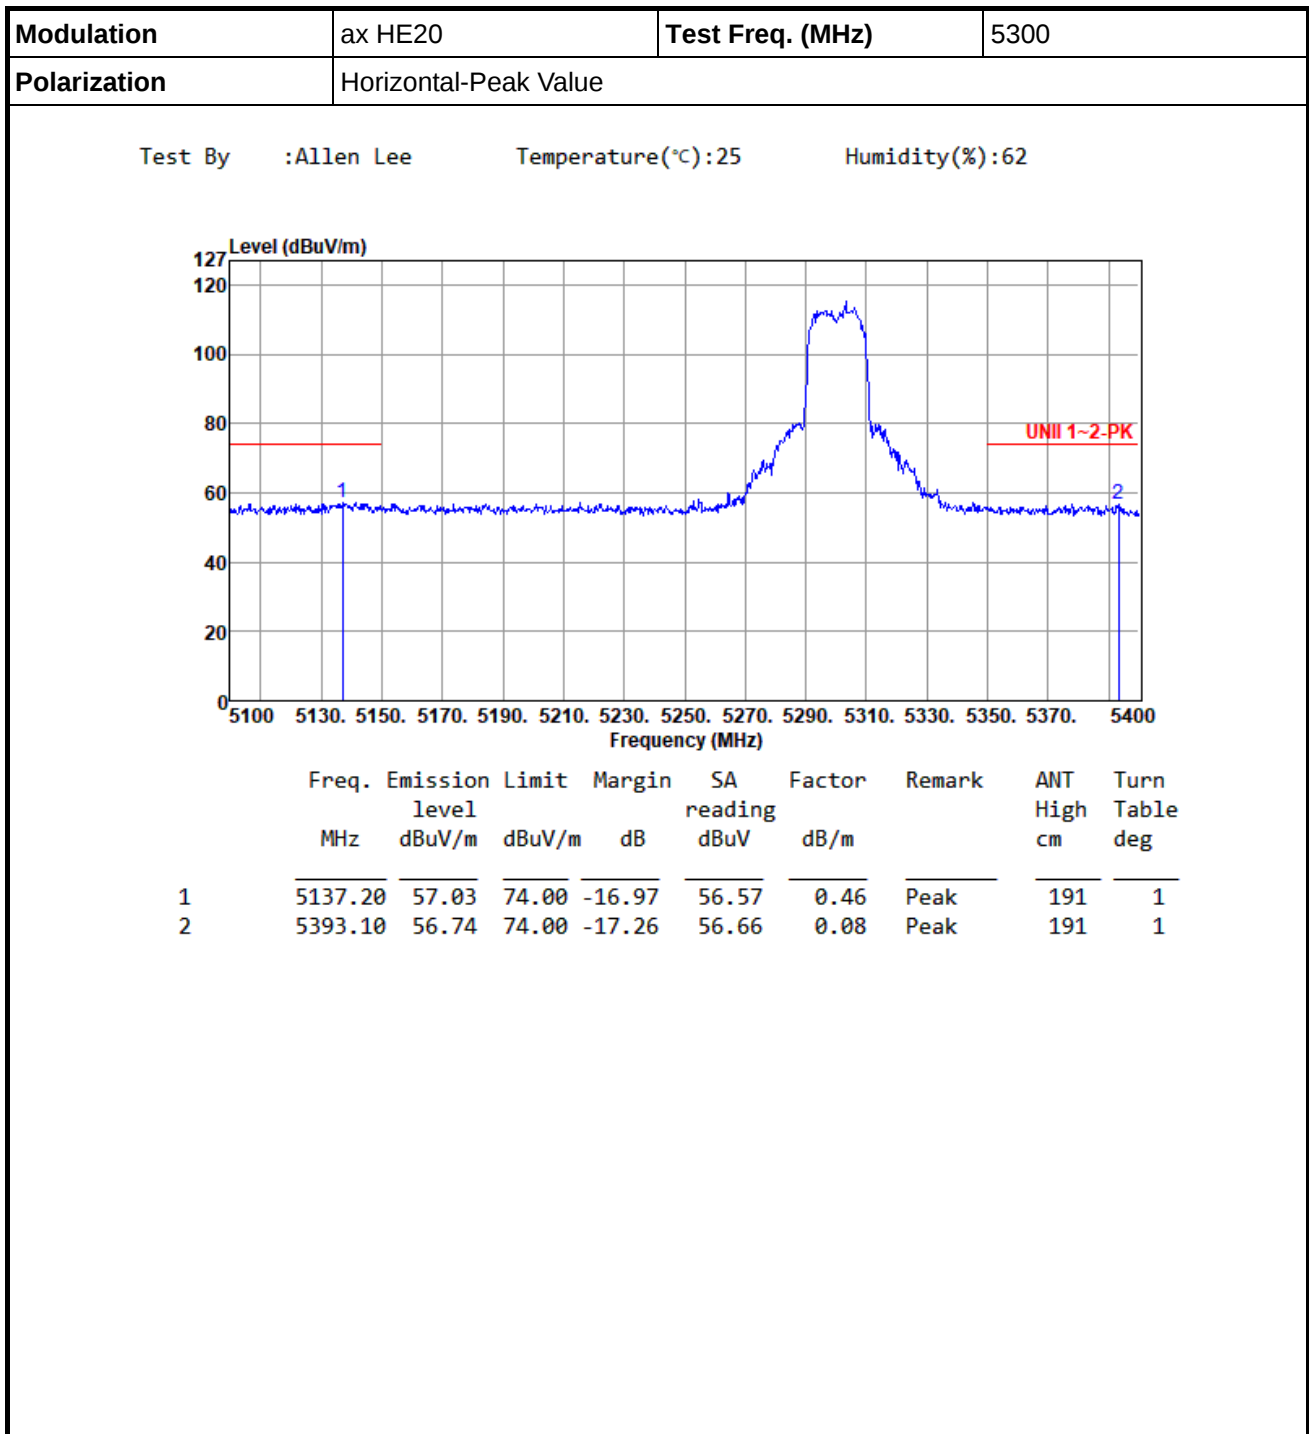


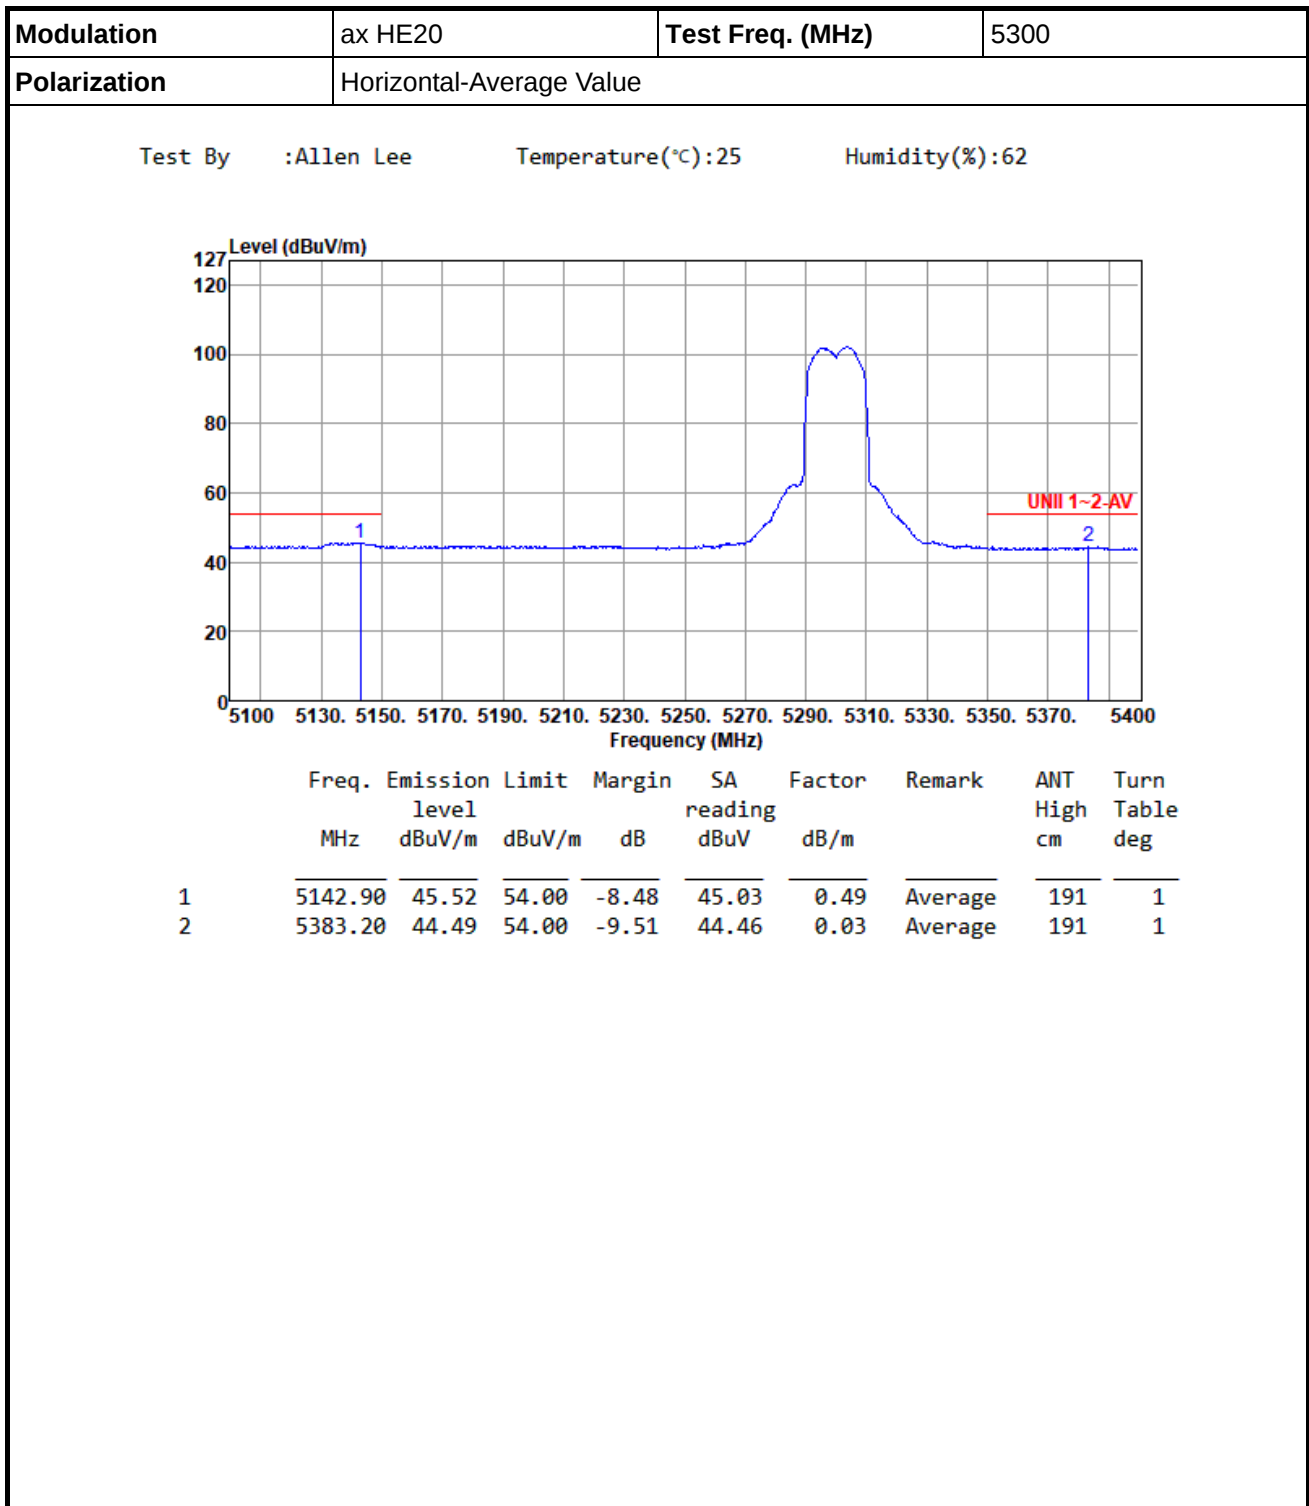


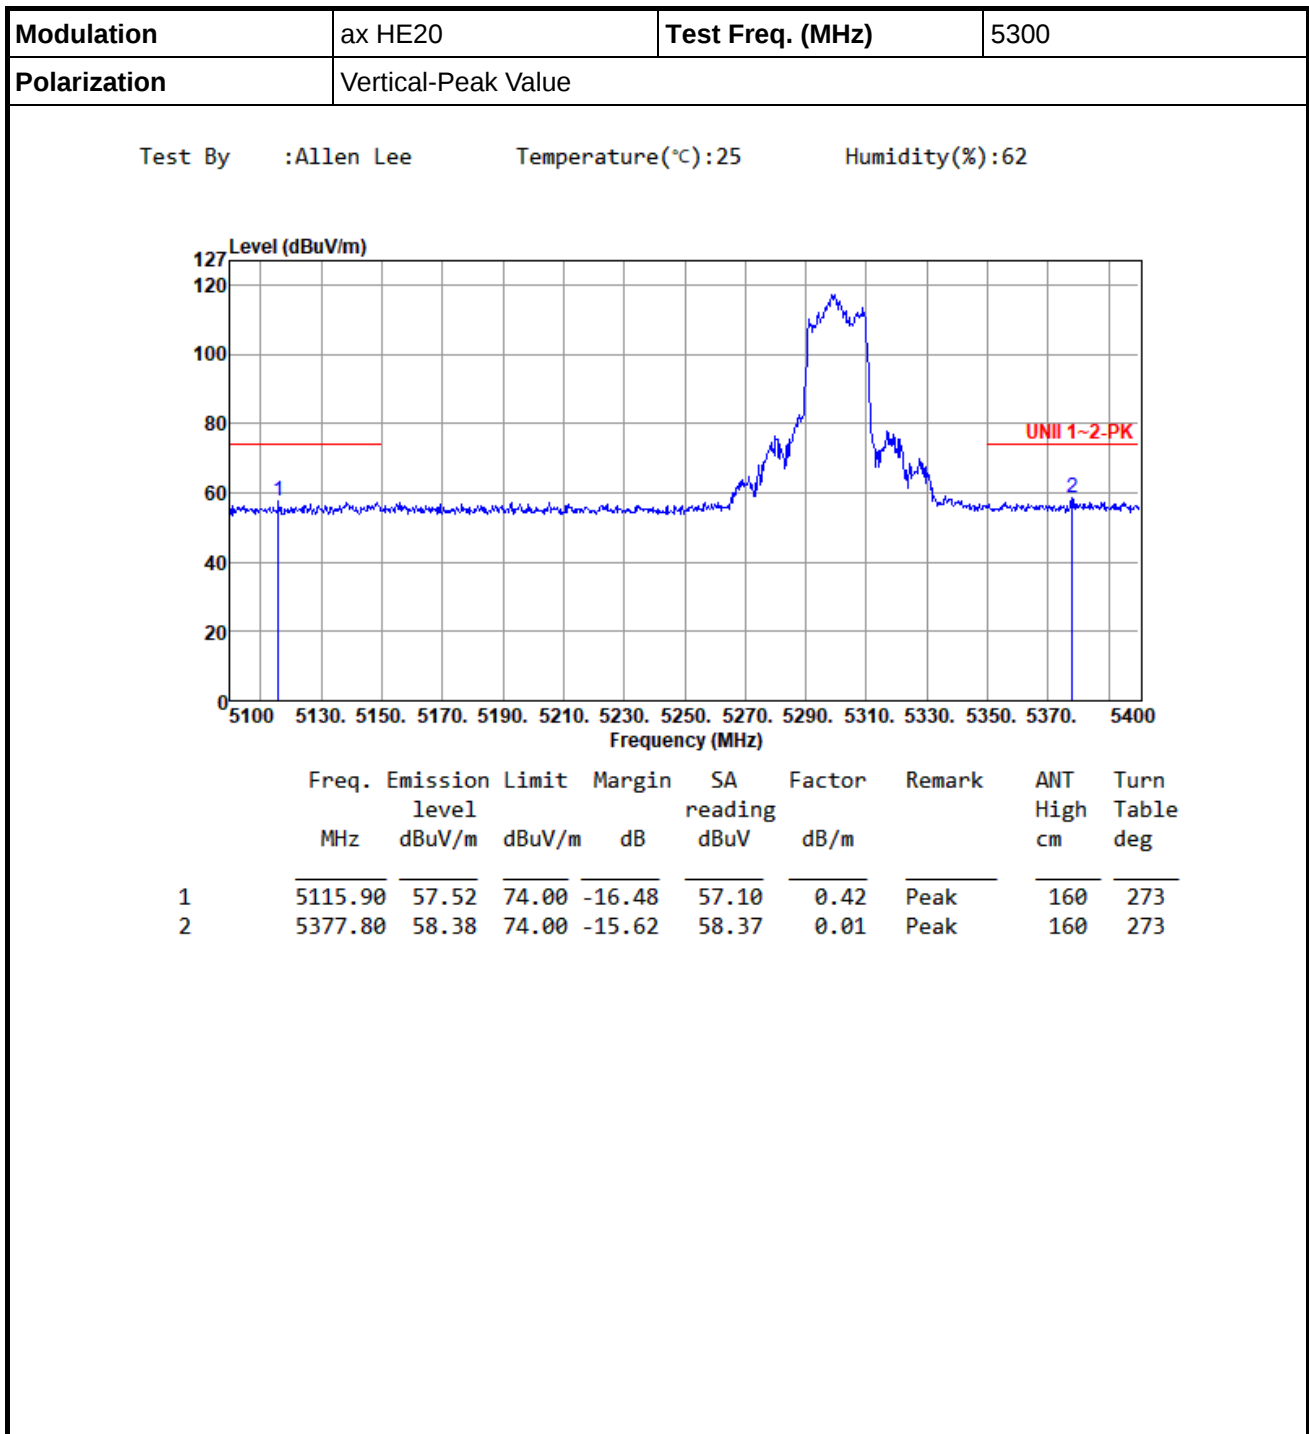


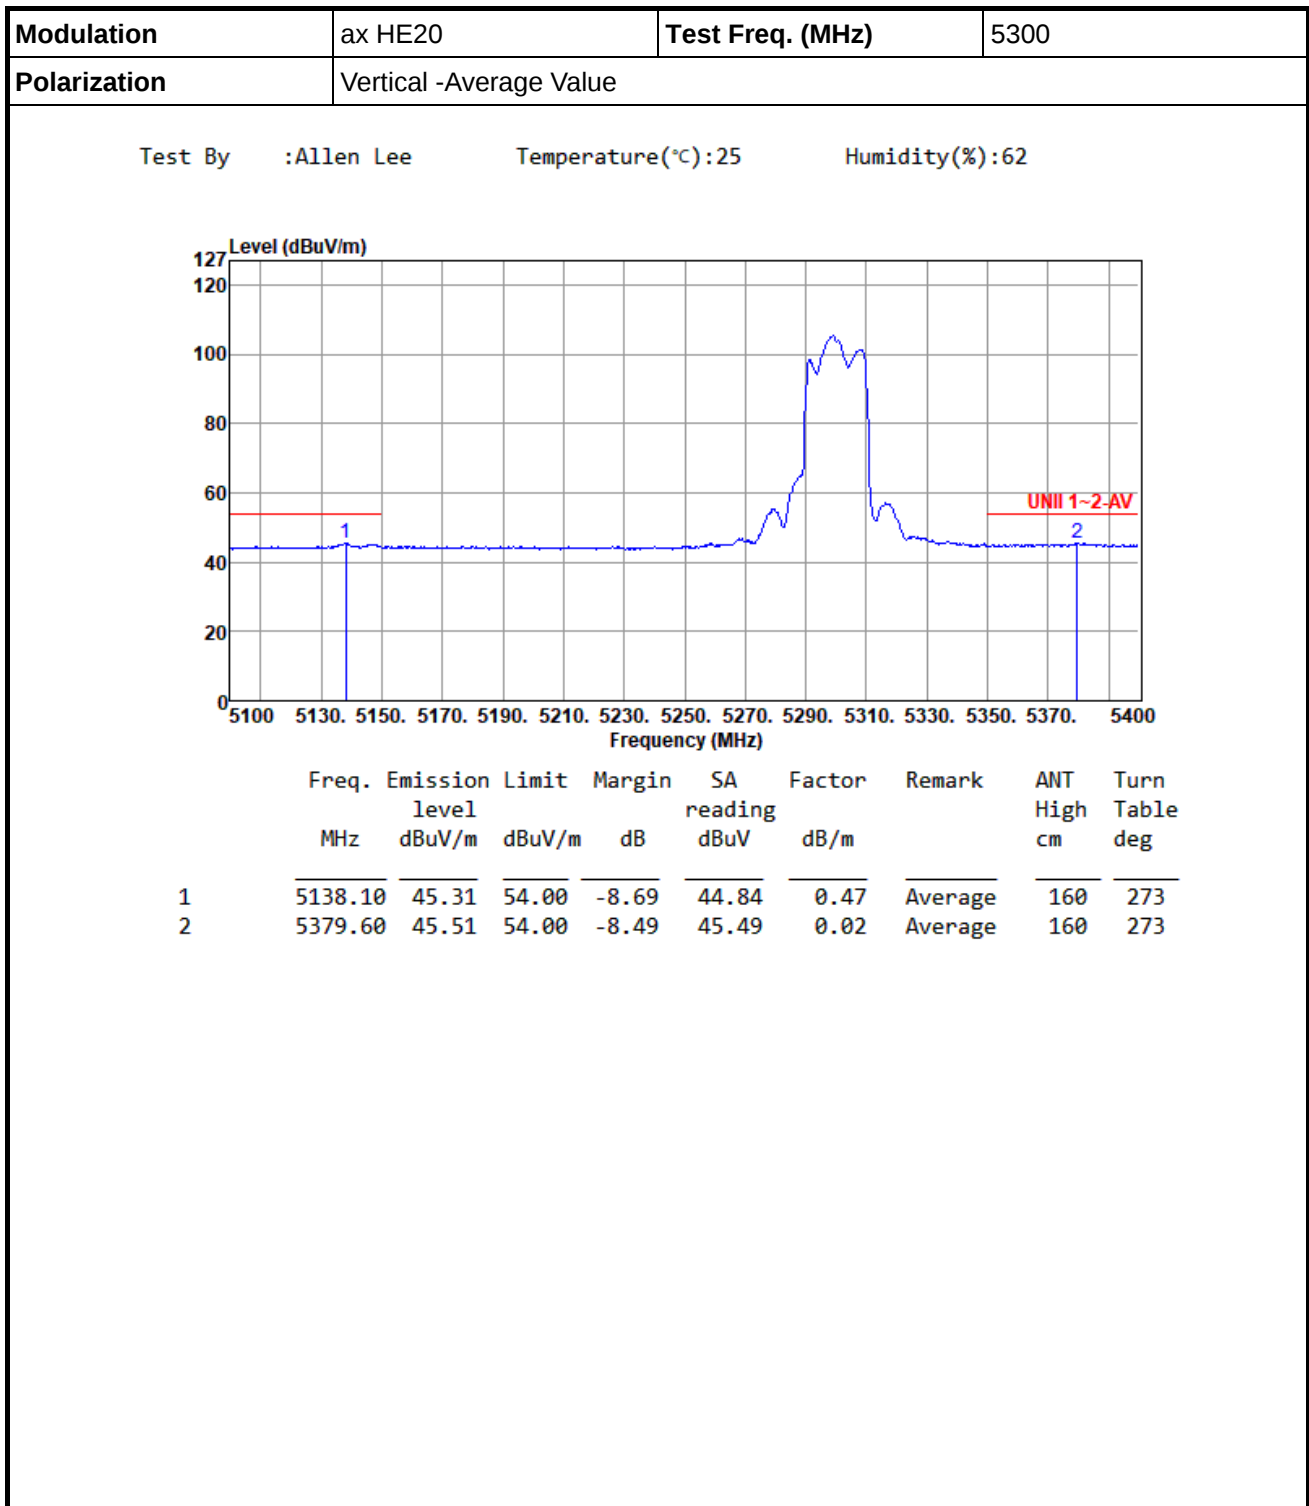


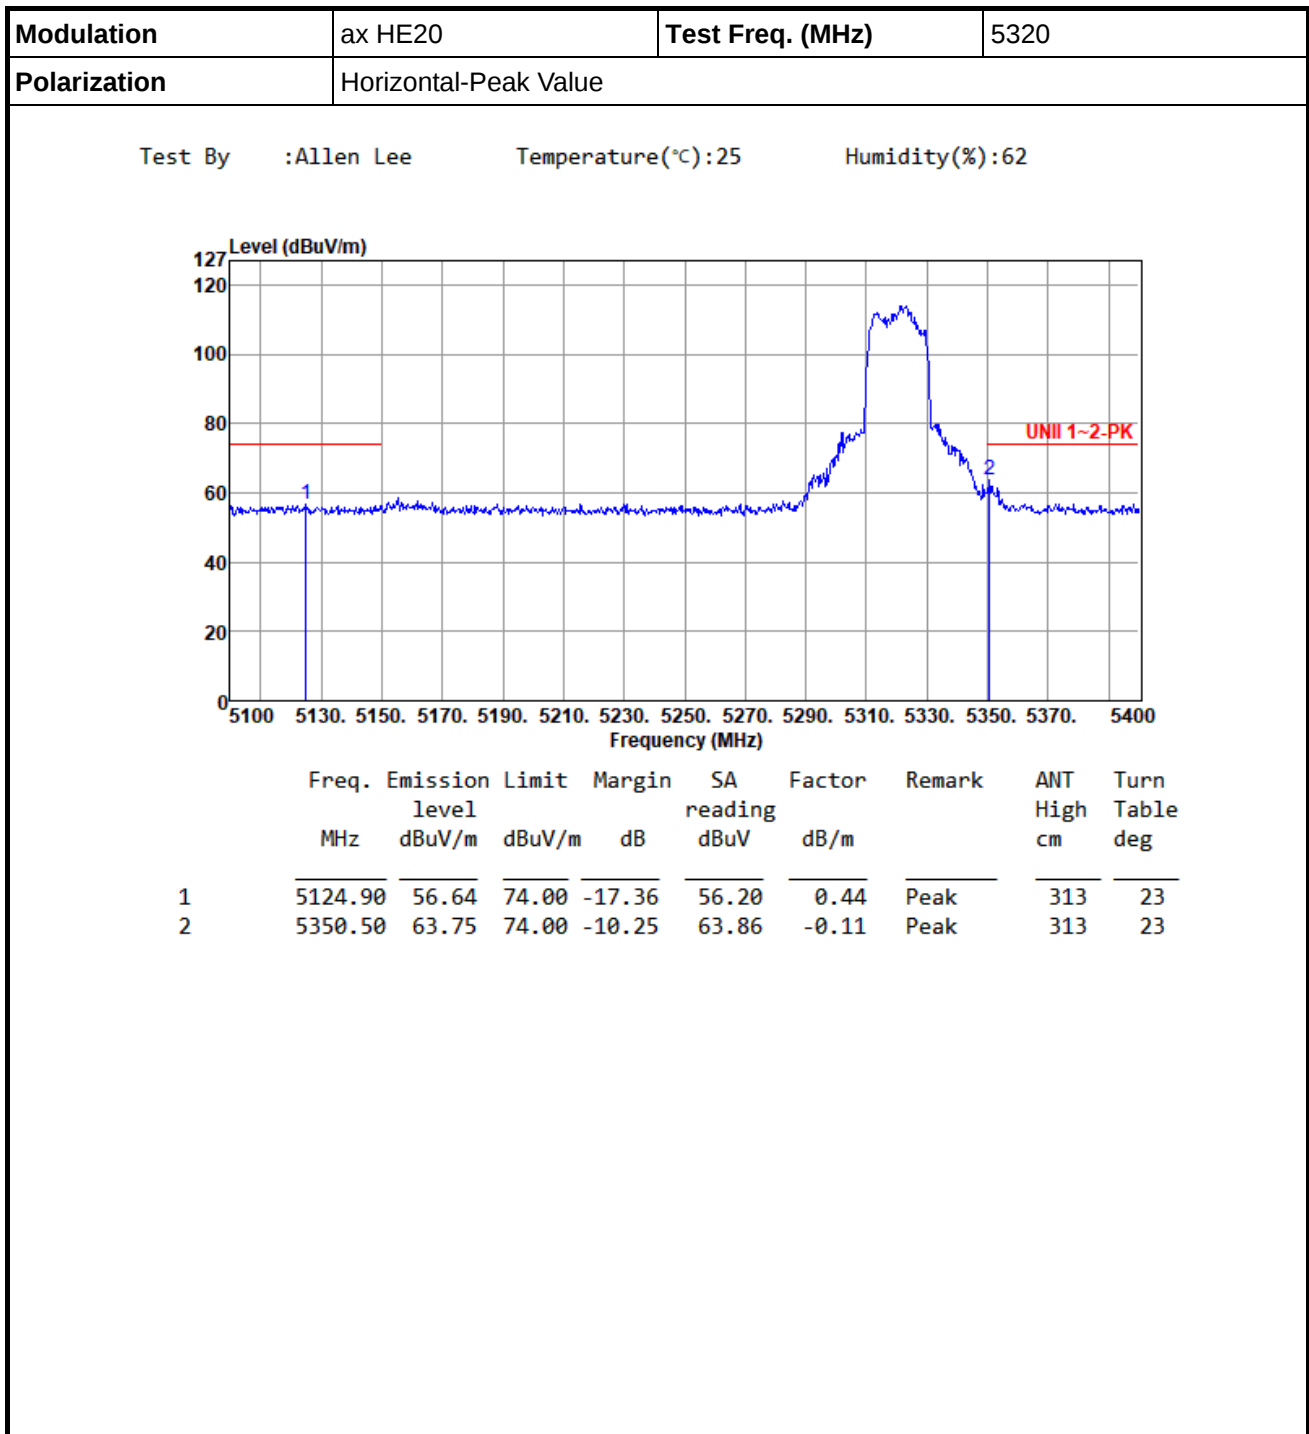

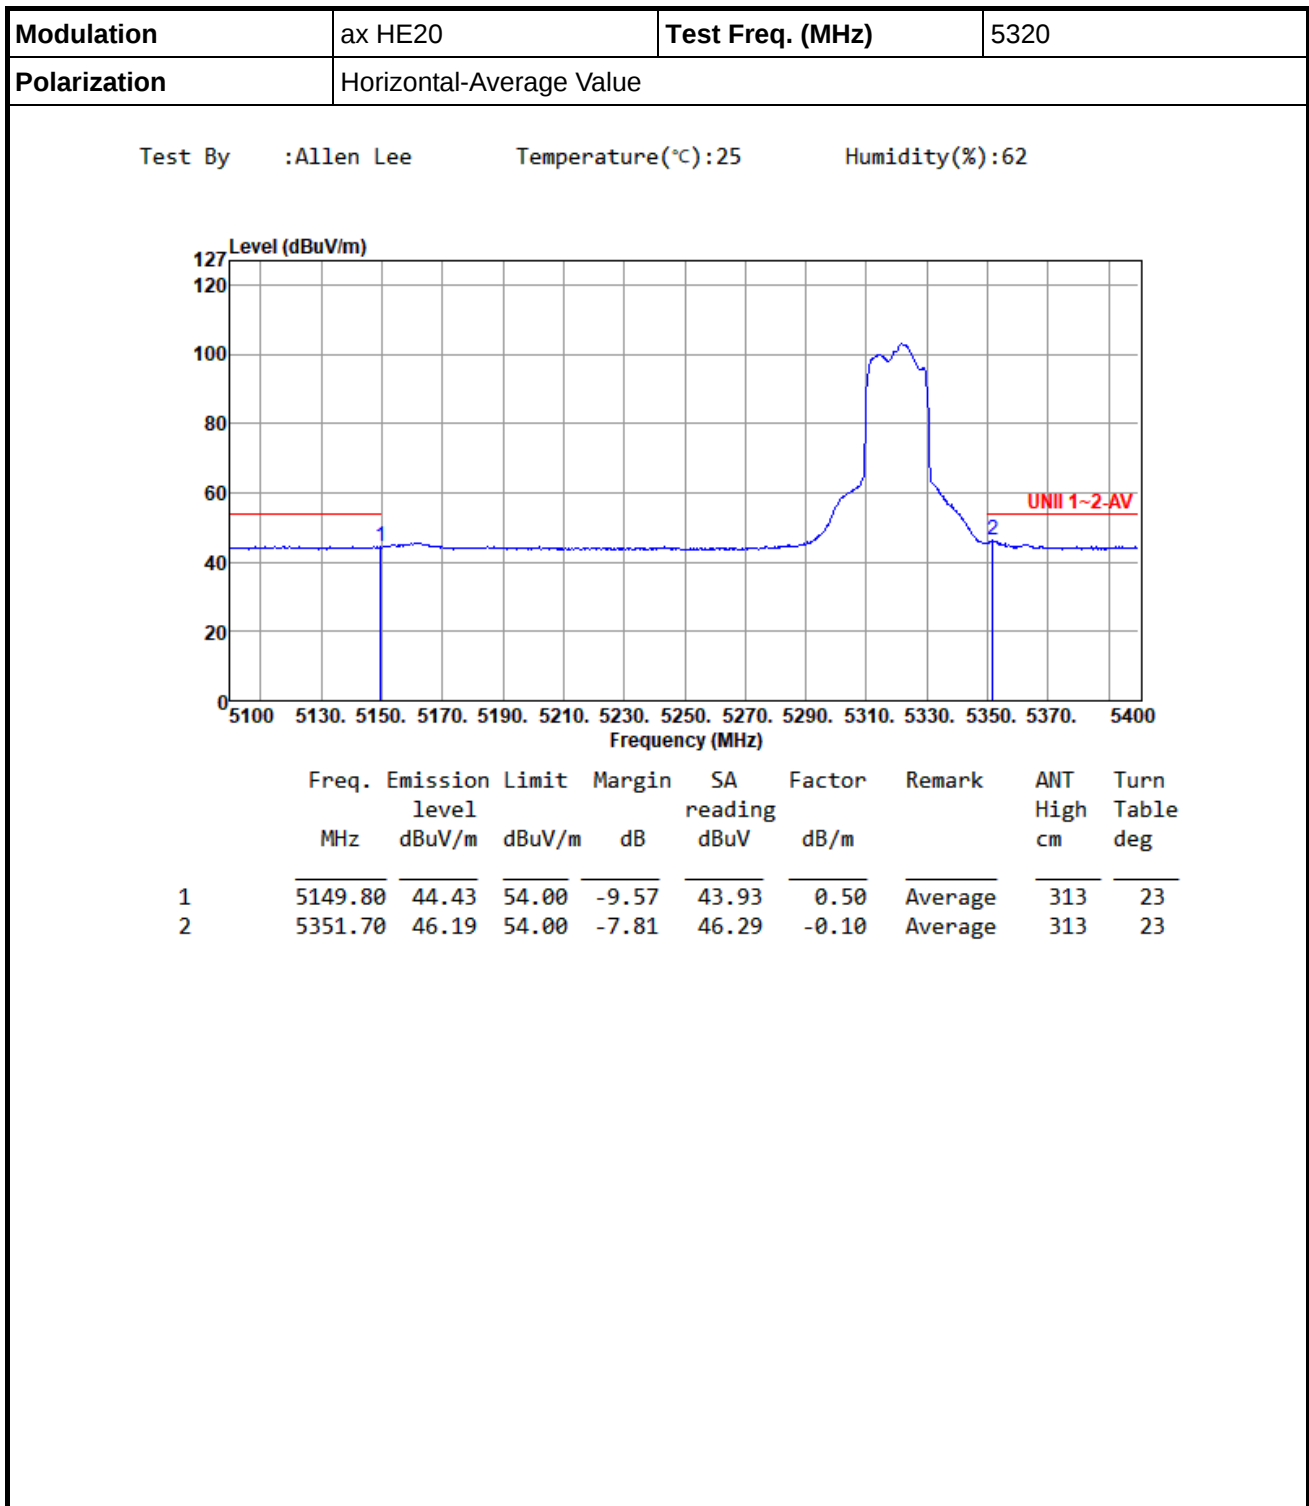


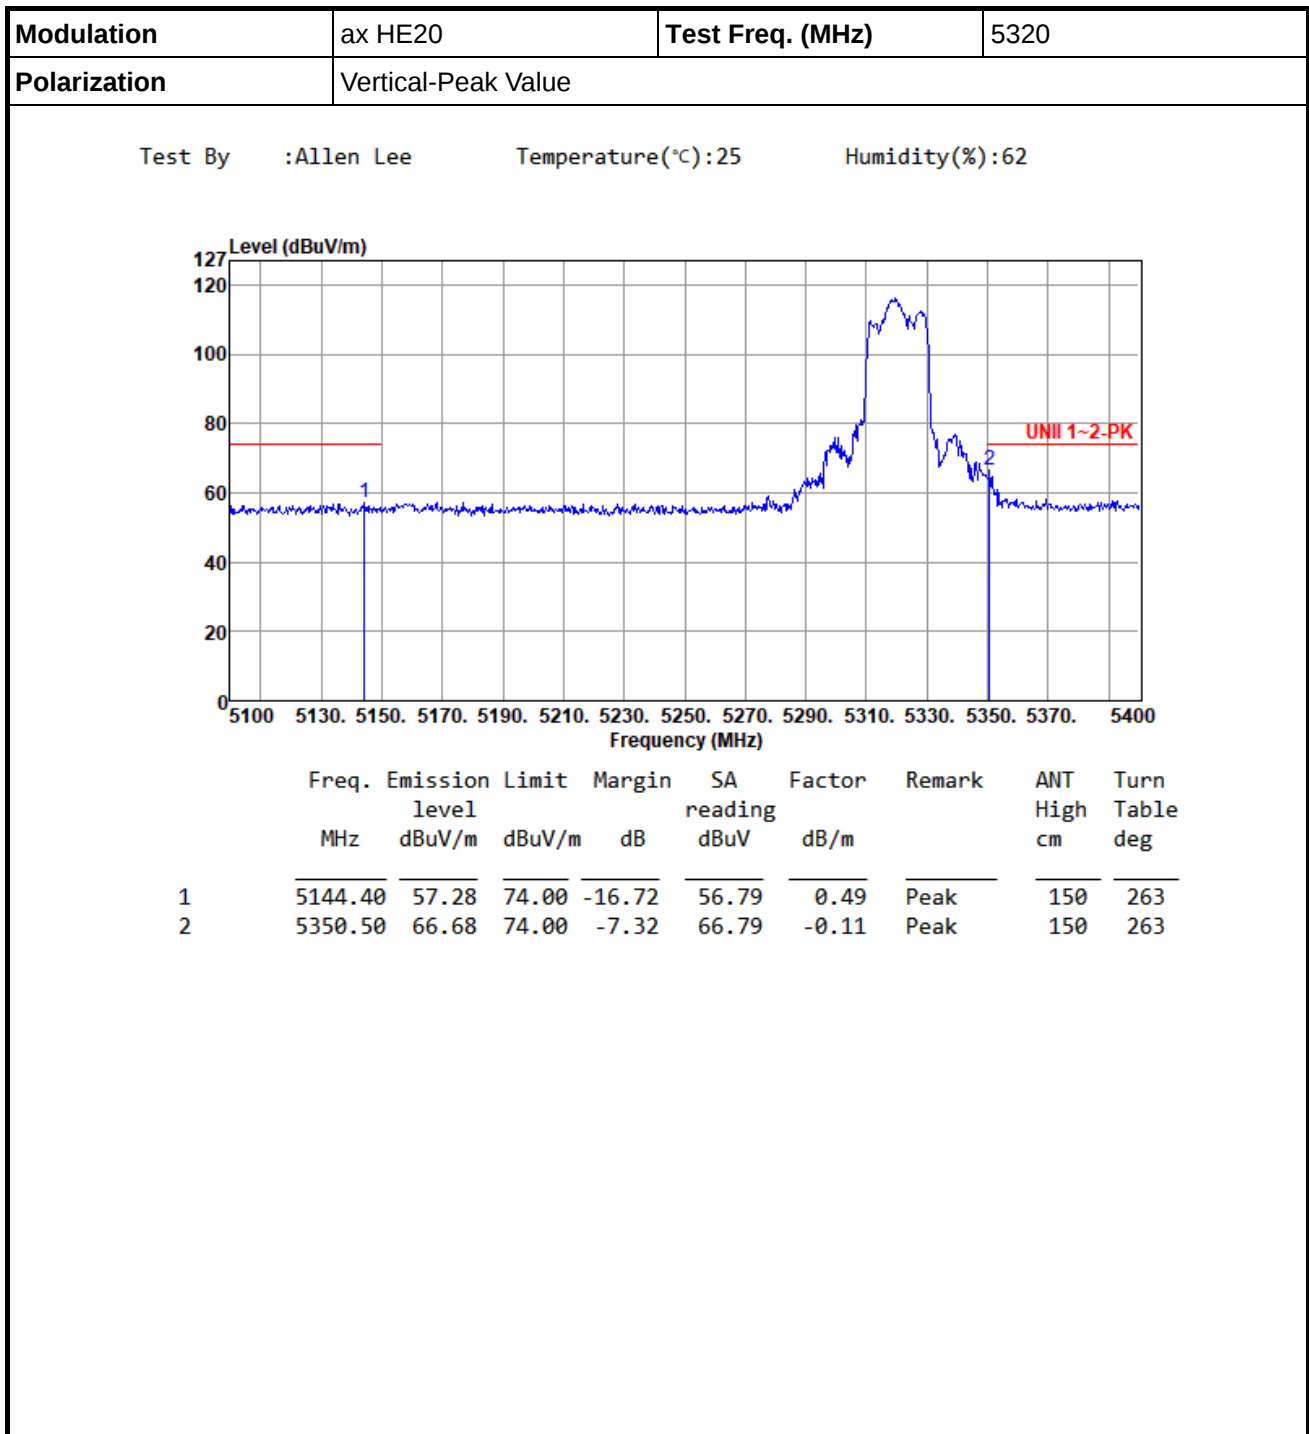

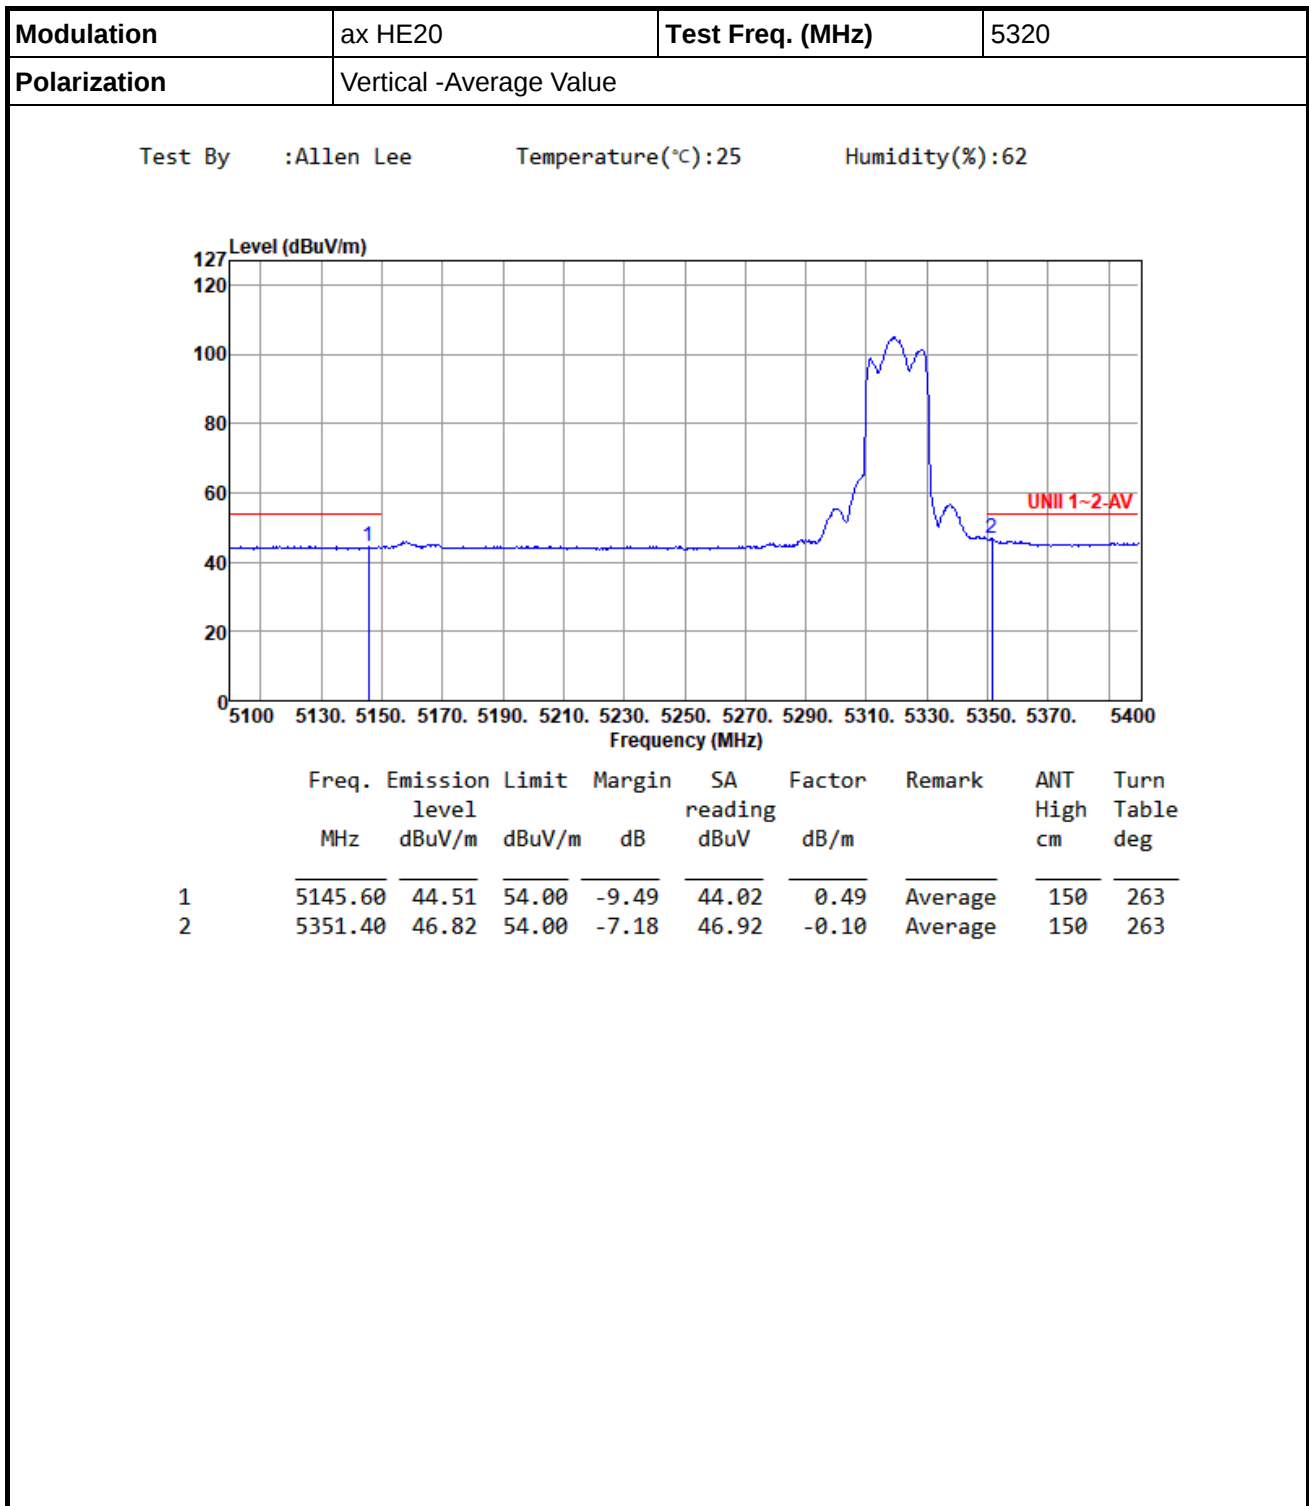

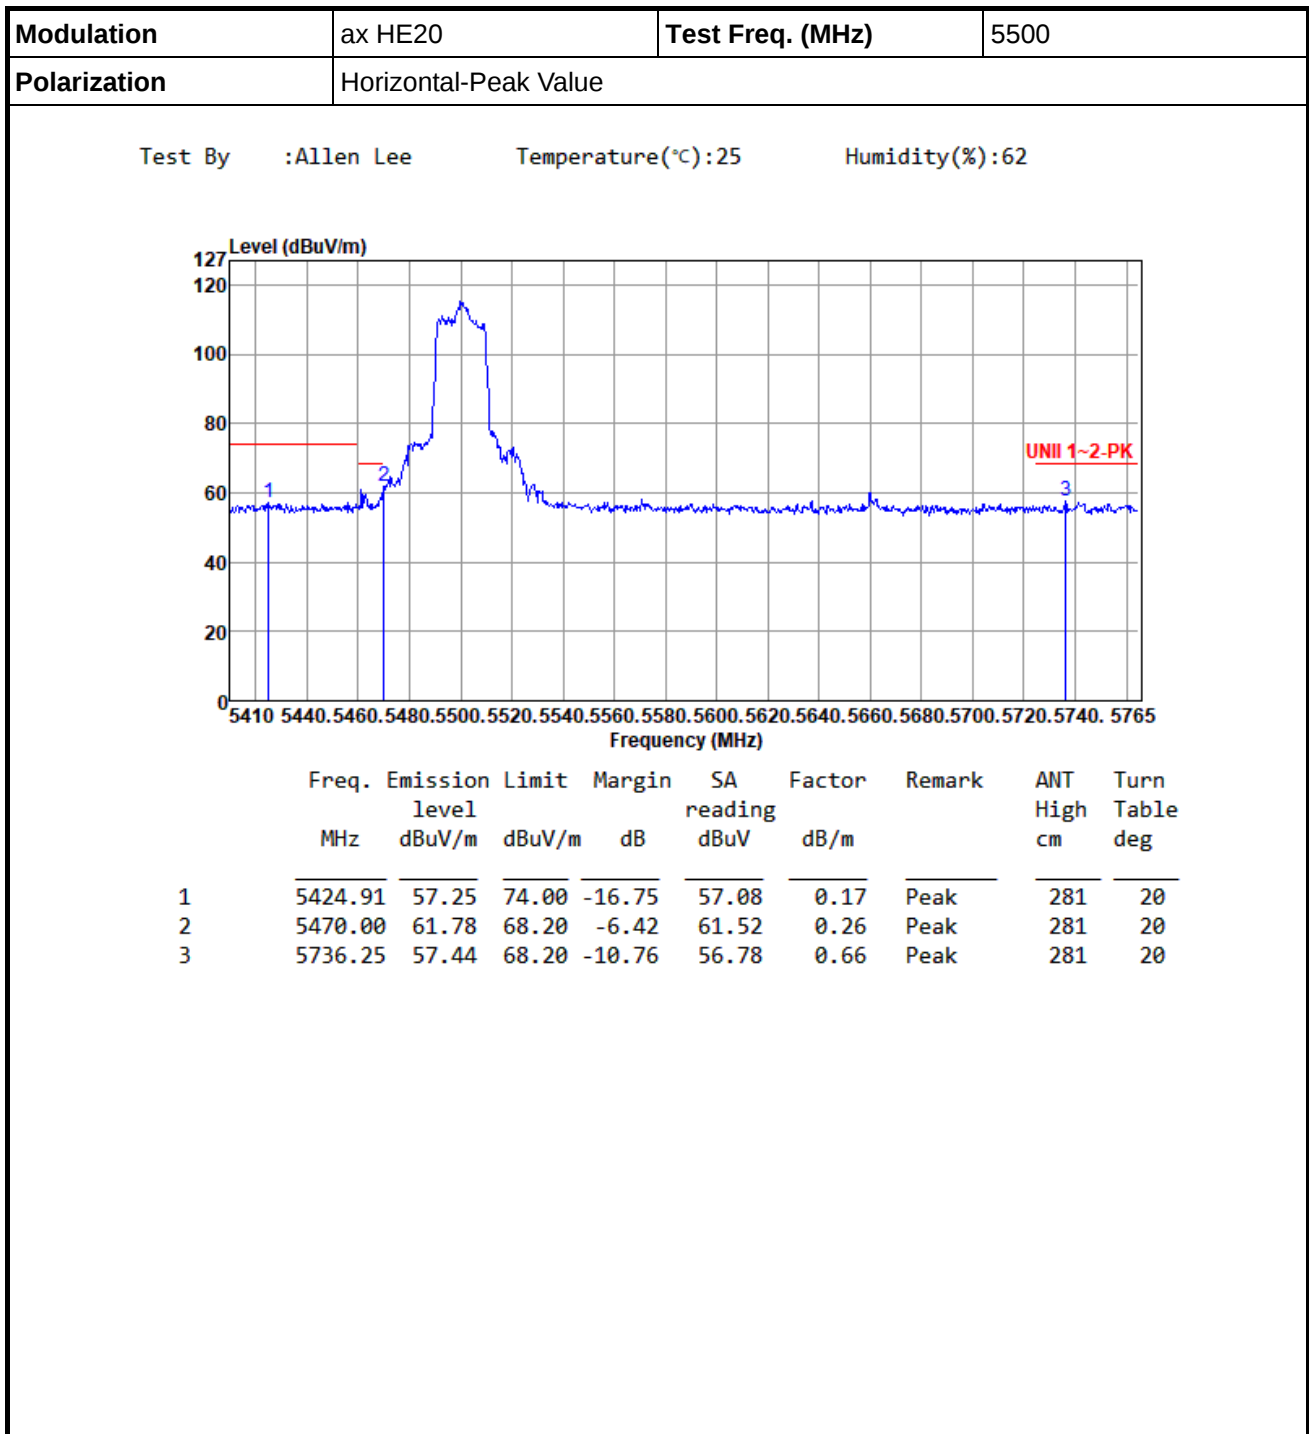

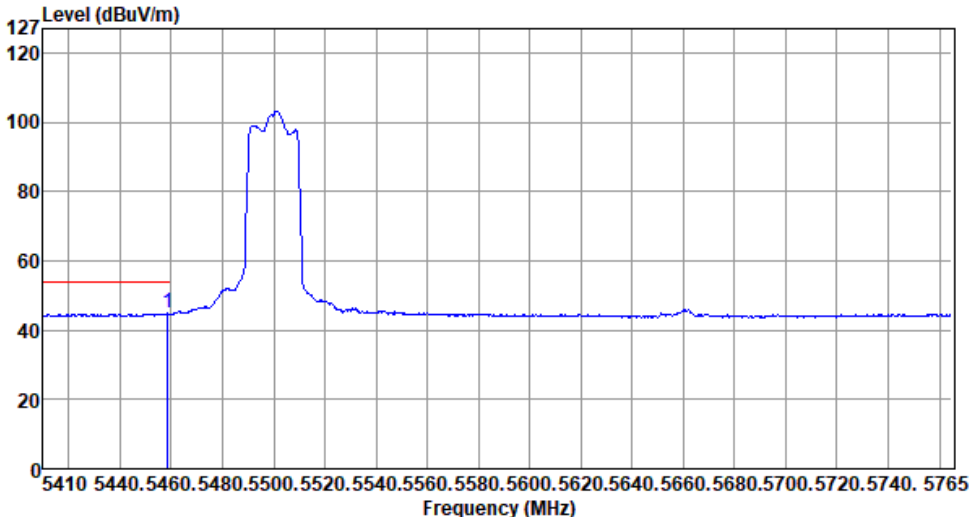


Modulation	ax HE20	Test Freq. (MHz)	5500						
Polarization	Horizontal-Average Value								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62									
Level (dBuV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5458.64	44.76	54.00	-9.24	44.52	0.24	Average	281	20



Band Edge measurement

Appendix D.3

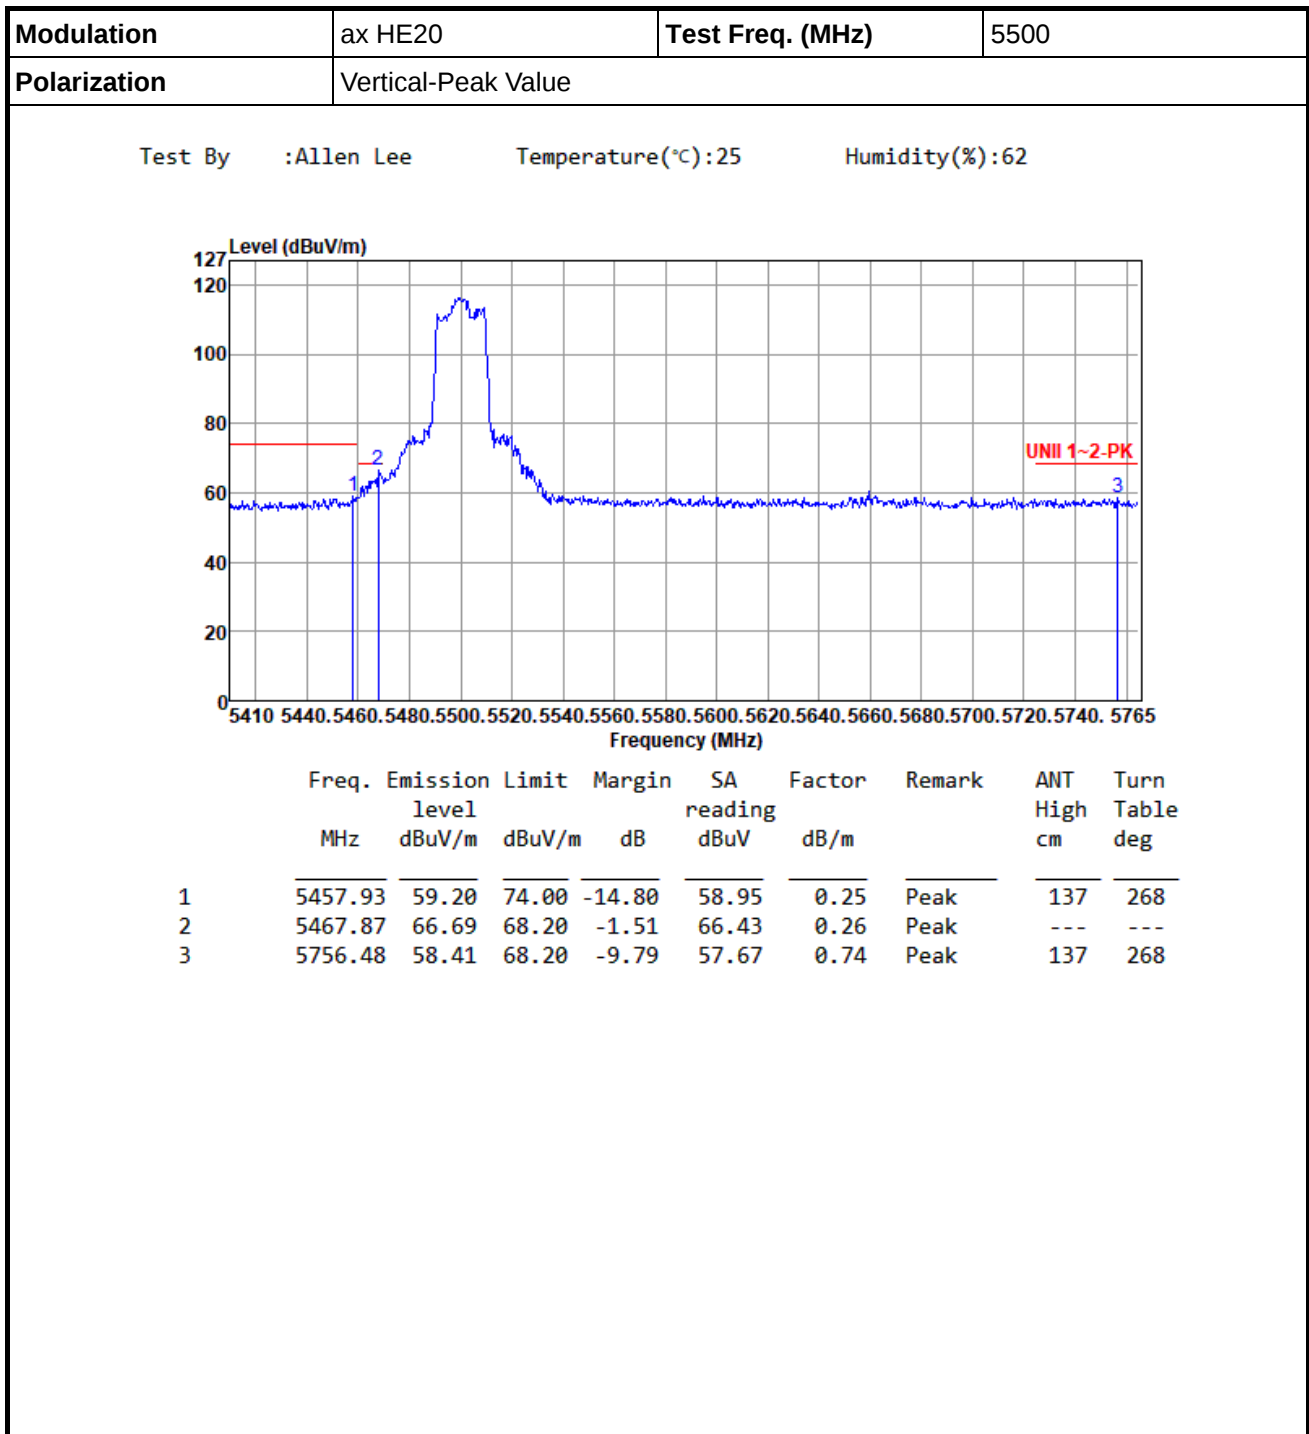



Band Edge measurement


Appendix D.3

Modulation	ax HE20	Test Freq. (MHz)	5500						
Polarization	Vertical -Average Value								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62									
Level (dBuV/m) Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	level				reading			High	Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5458.99	46.23	54.00	-7.77	45.99	0.24	Average	137	268





Band Edge measurement

Appendix D.3

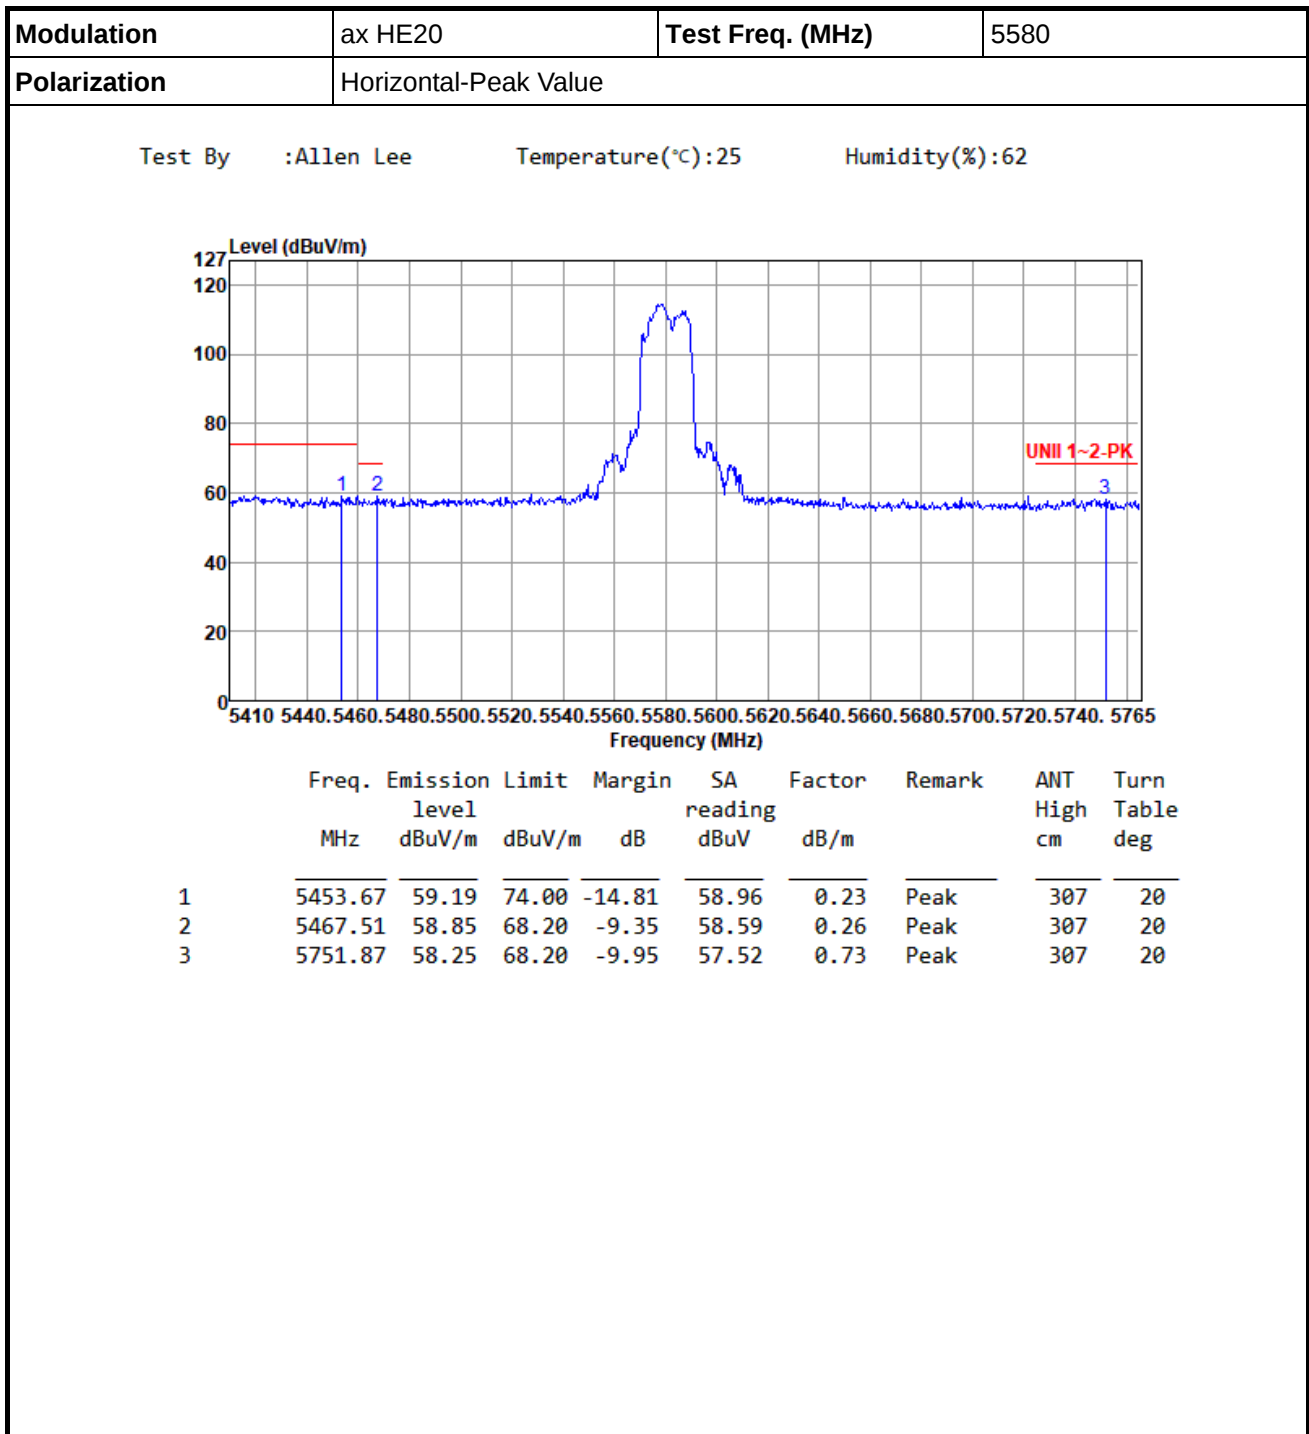


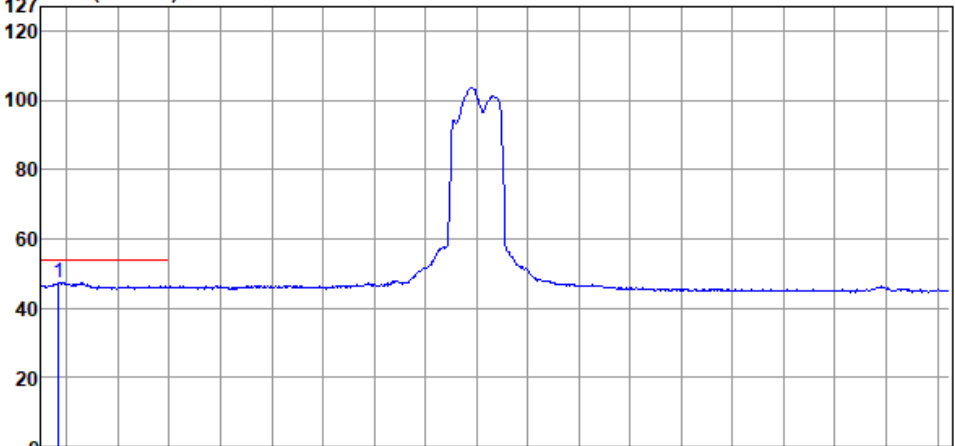


Modulation	ax HE20	Test Freq. (MHz)	5580						
Polarization	Horizontal-Average Value								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62									
Level (dBuV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5416.75	47.35	54.00	-6.65	47.20	0.15	Average	307	20

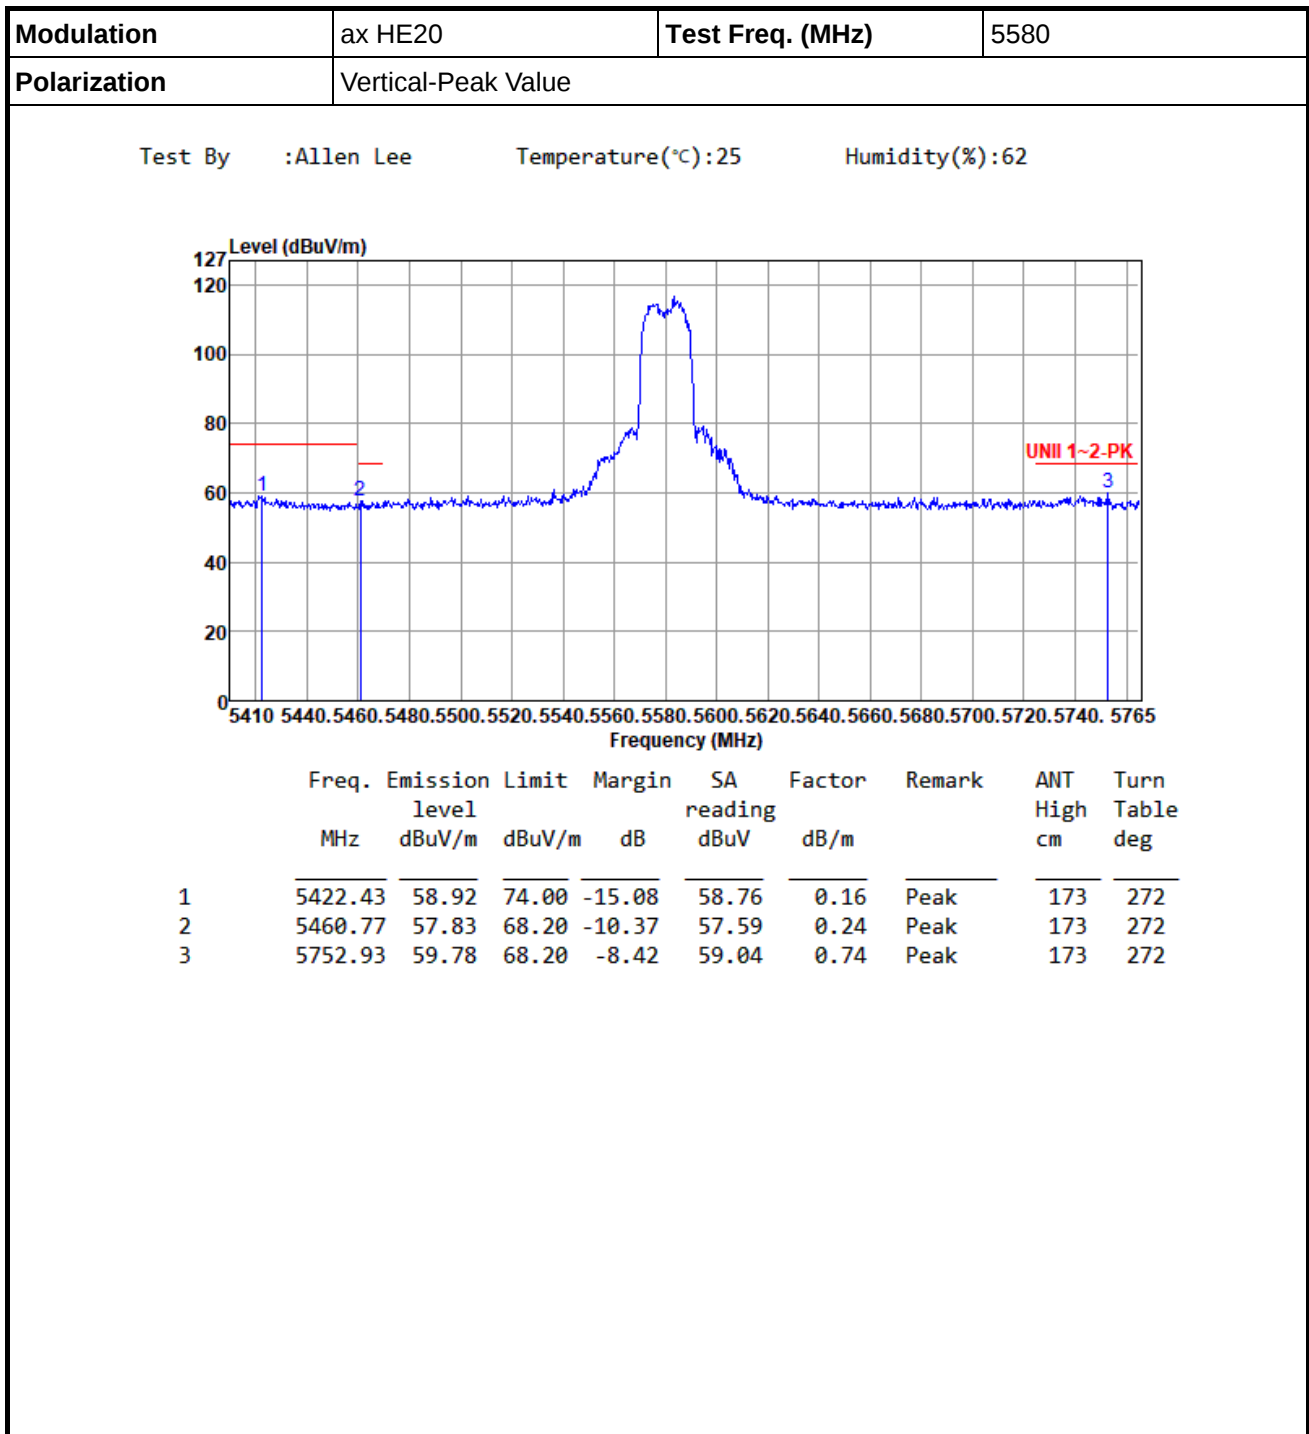


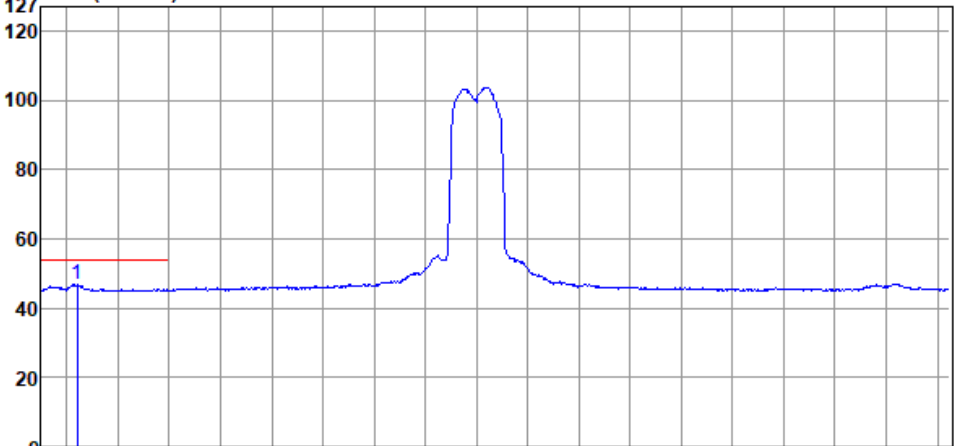



Modulation	ax HE20	Test Freq. (MHz)	5580						
Polarization	Vertical -Average Value								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62									
Level (dBuV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5424.20	46.72	54.00	-7.28	46.55	0.17	Average	173	272

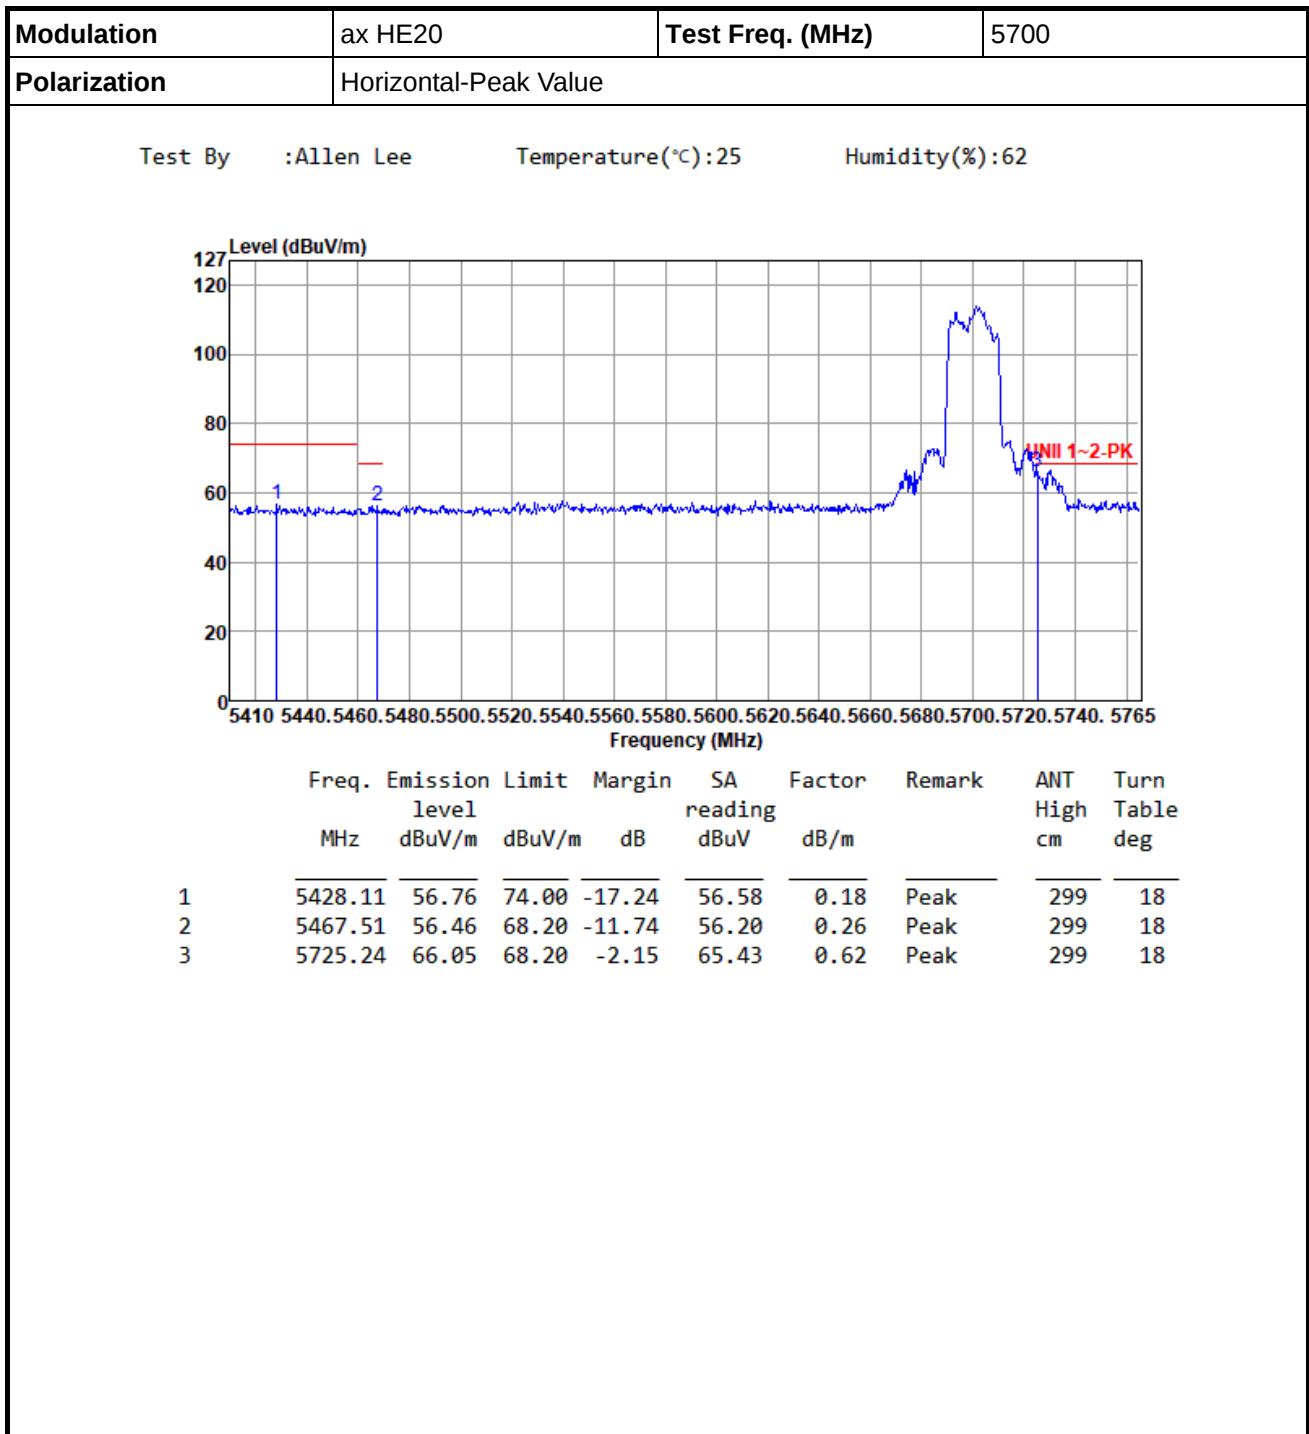


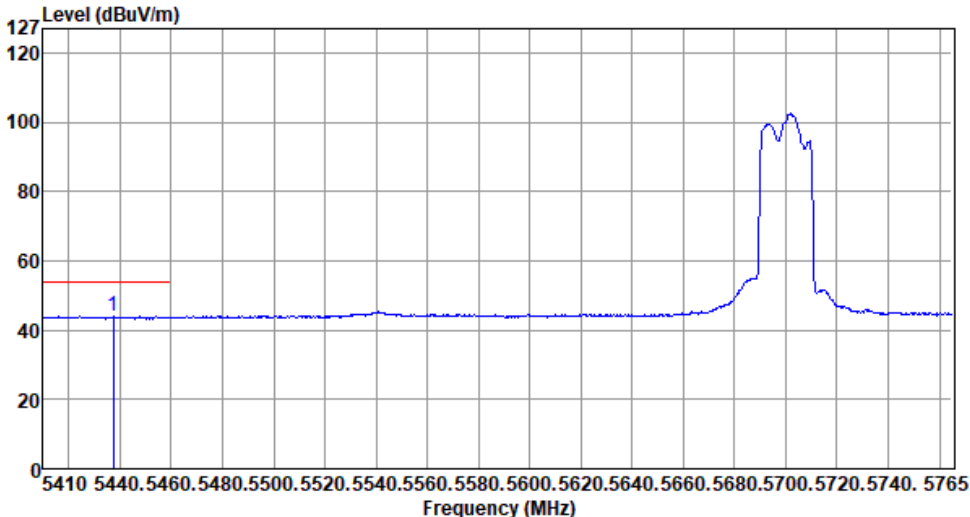



Modulation	ax HE20	Test Freq. (MHz)	5700						
Polarization	Horizontal-Average Value								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62									
Level (dBUV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBUV/m	dBUV/m	dB	dBUV	dB/m		cm	deg
1	5437.34	44.12	54.00	-9.88	43.93	0.19	Average	299	18

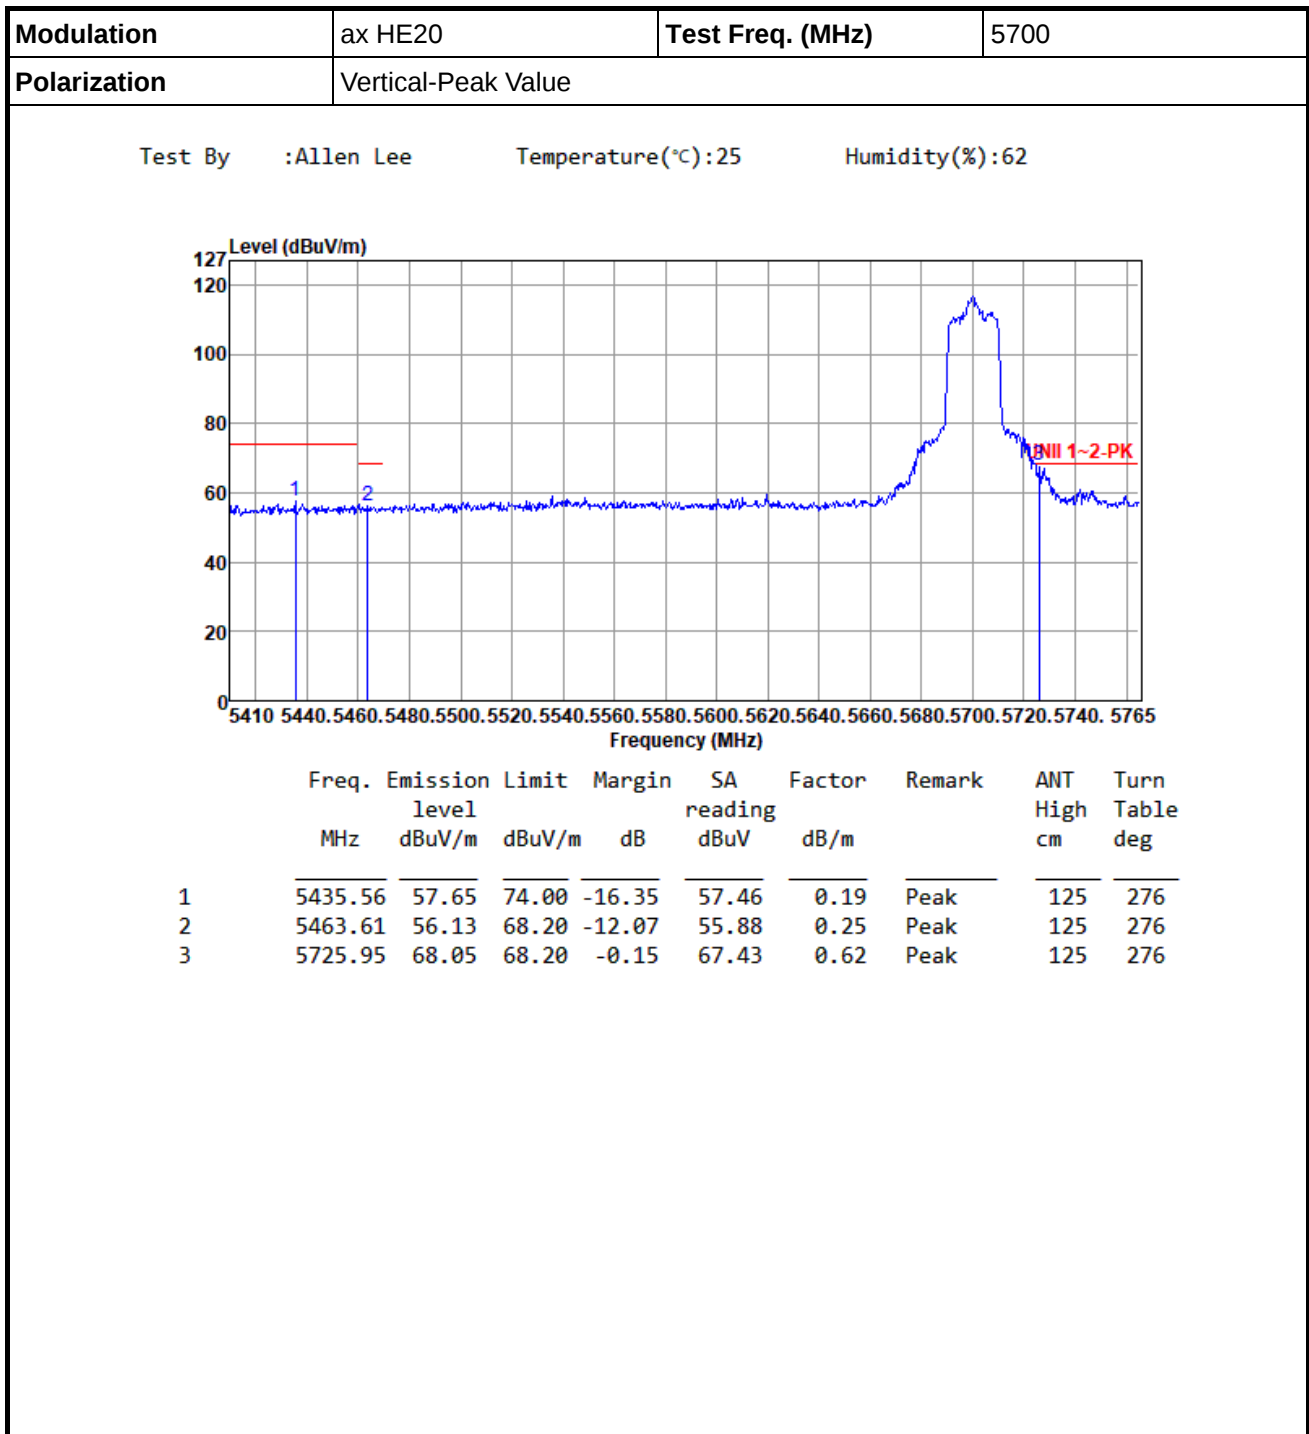


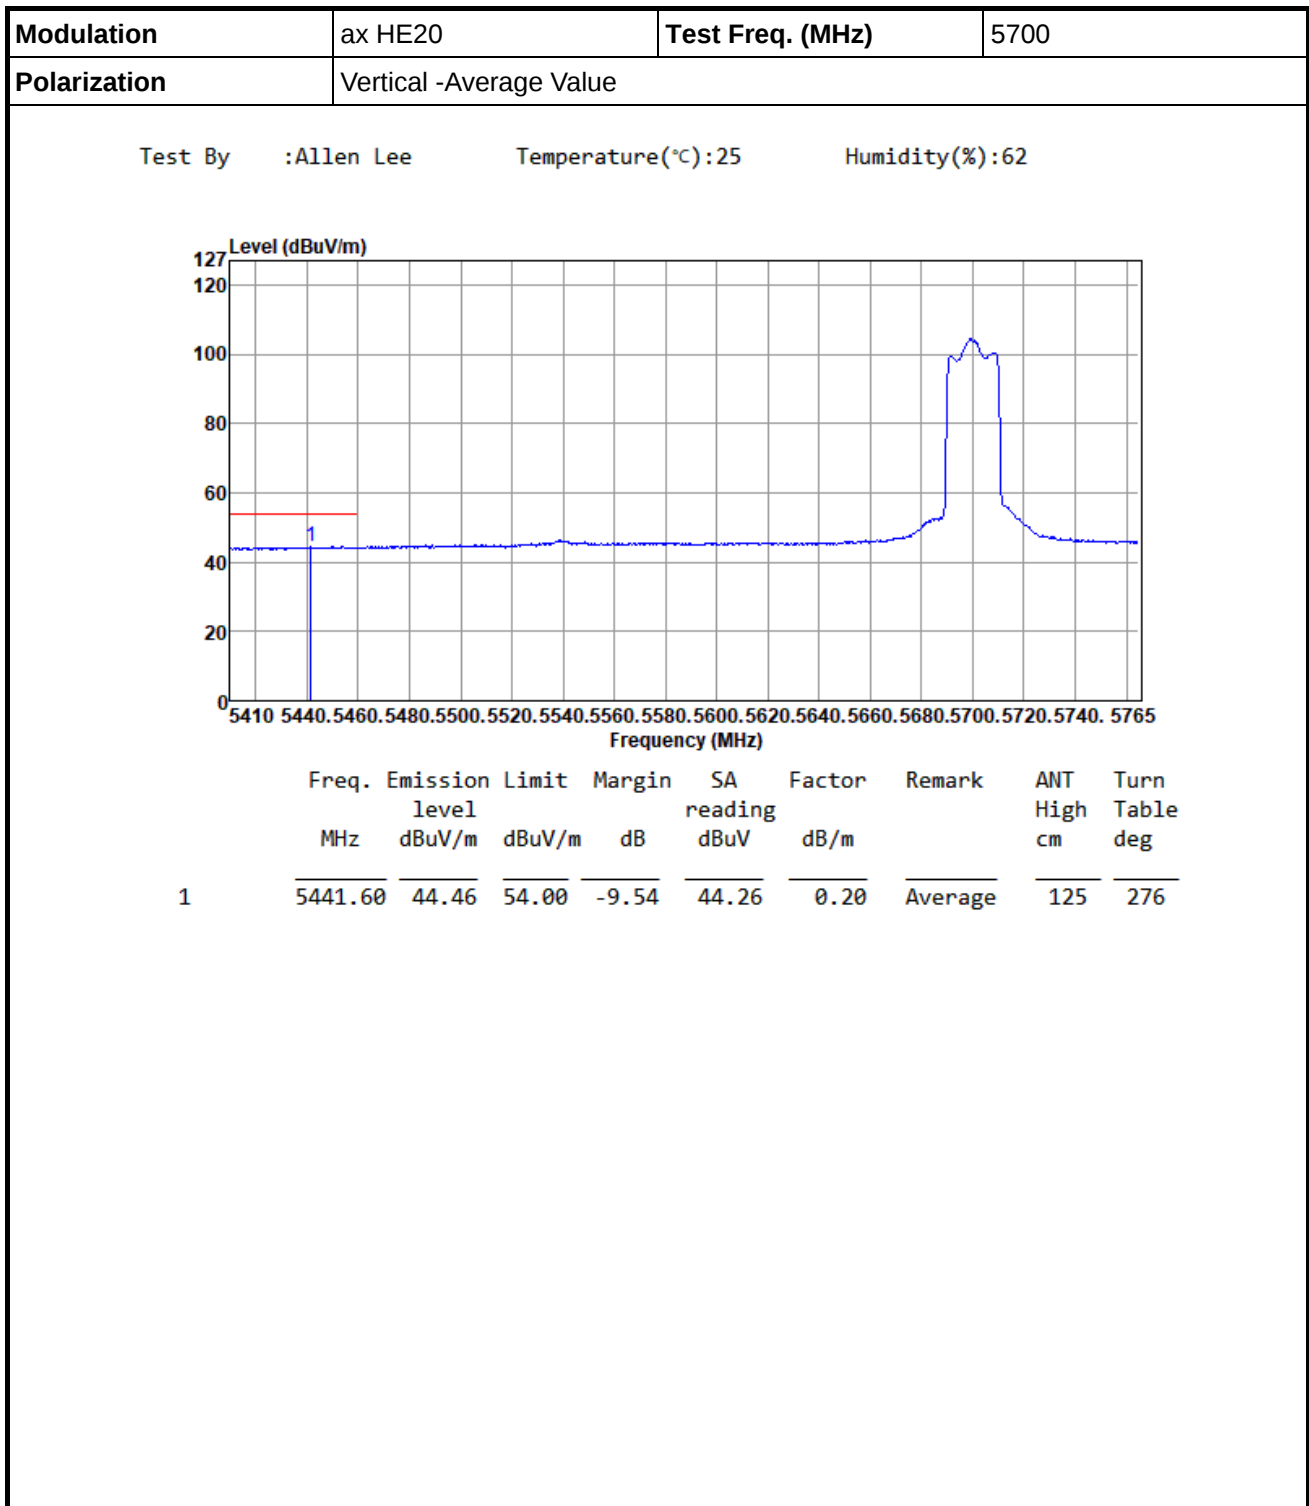


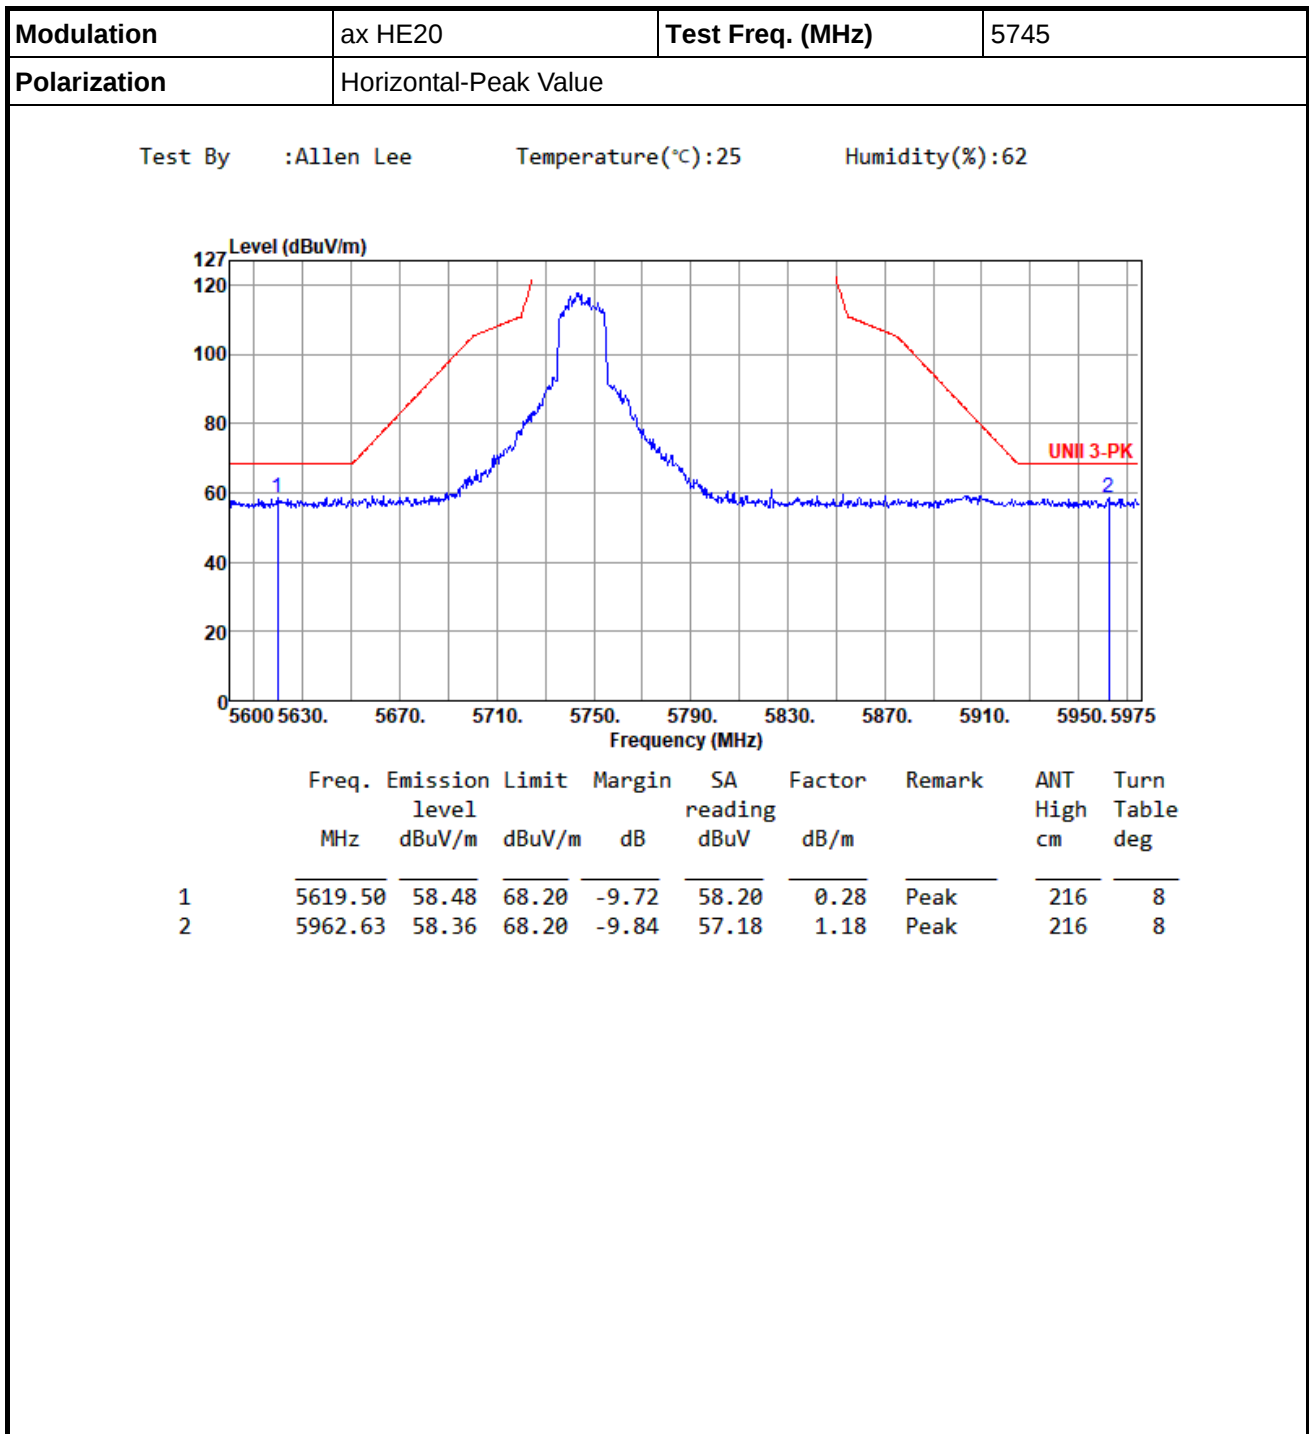


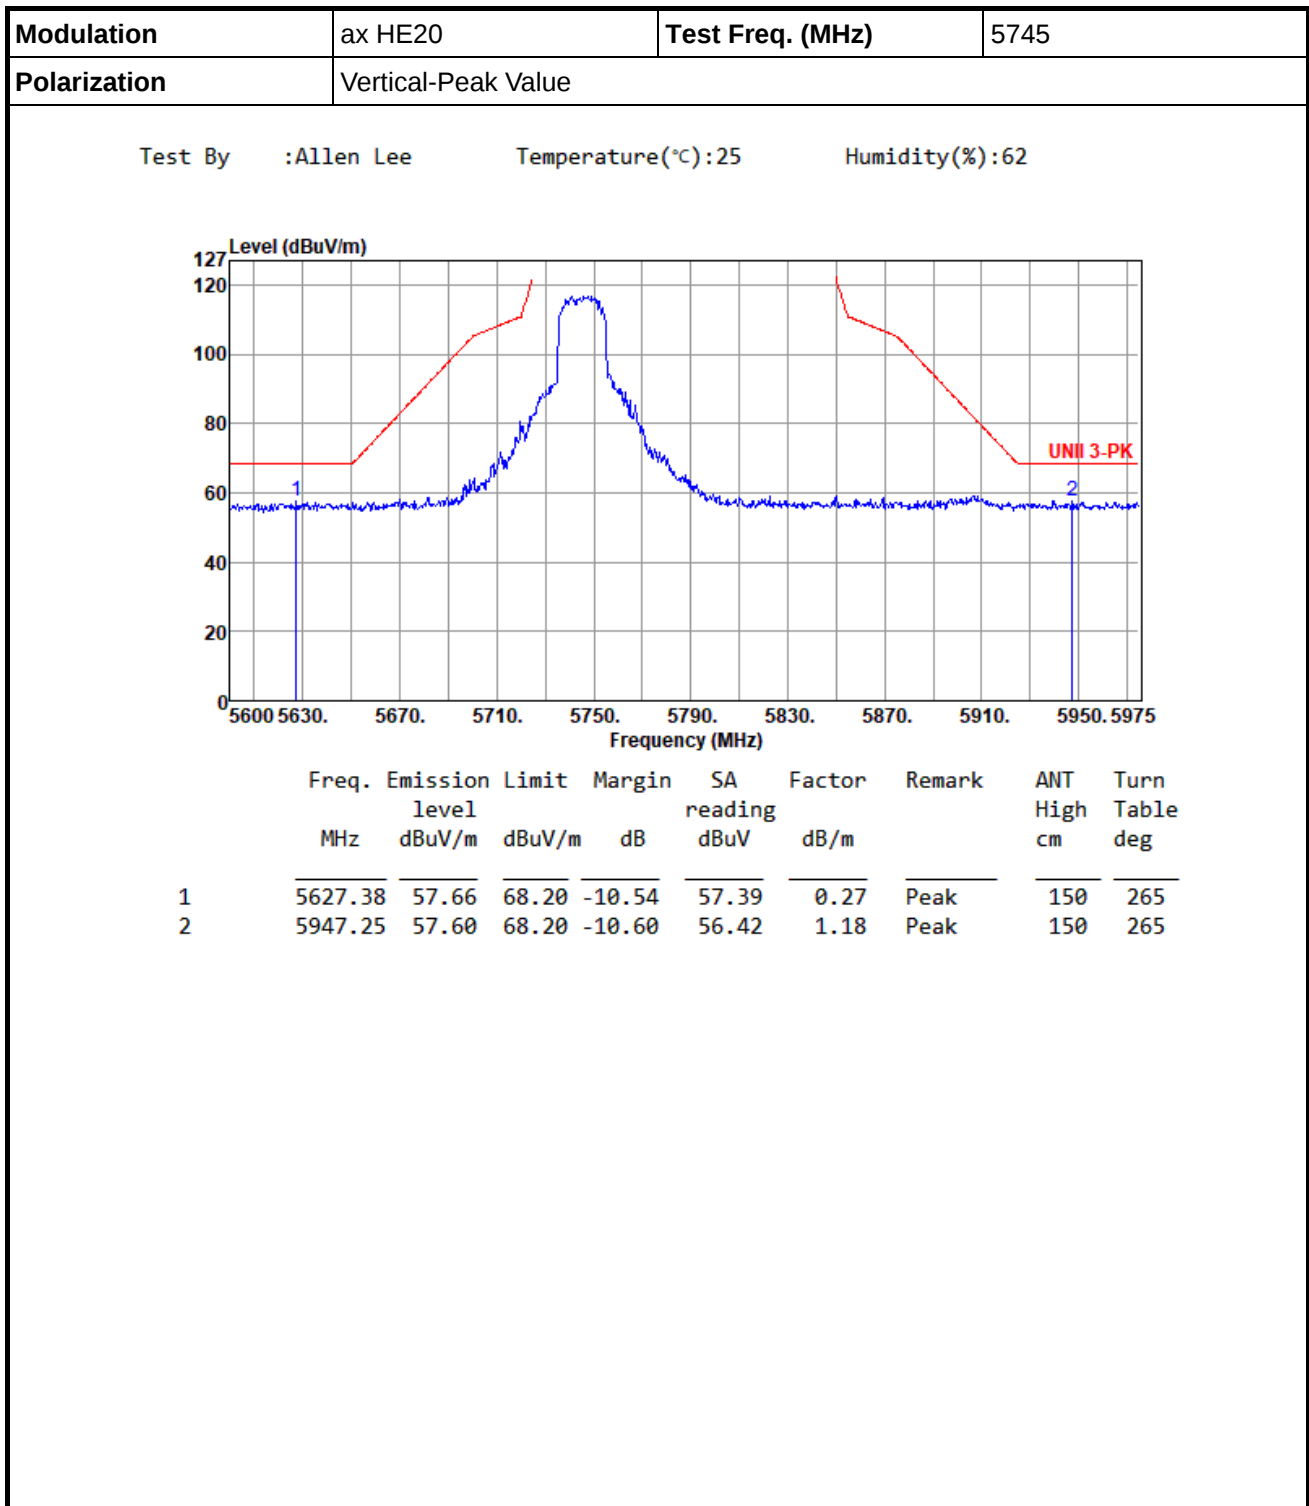

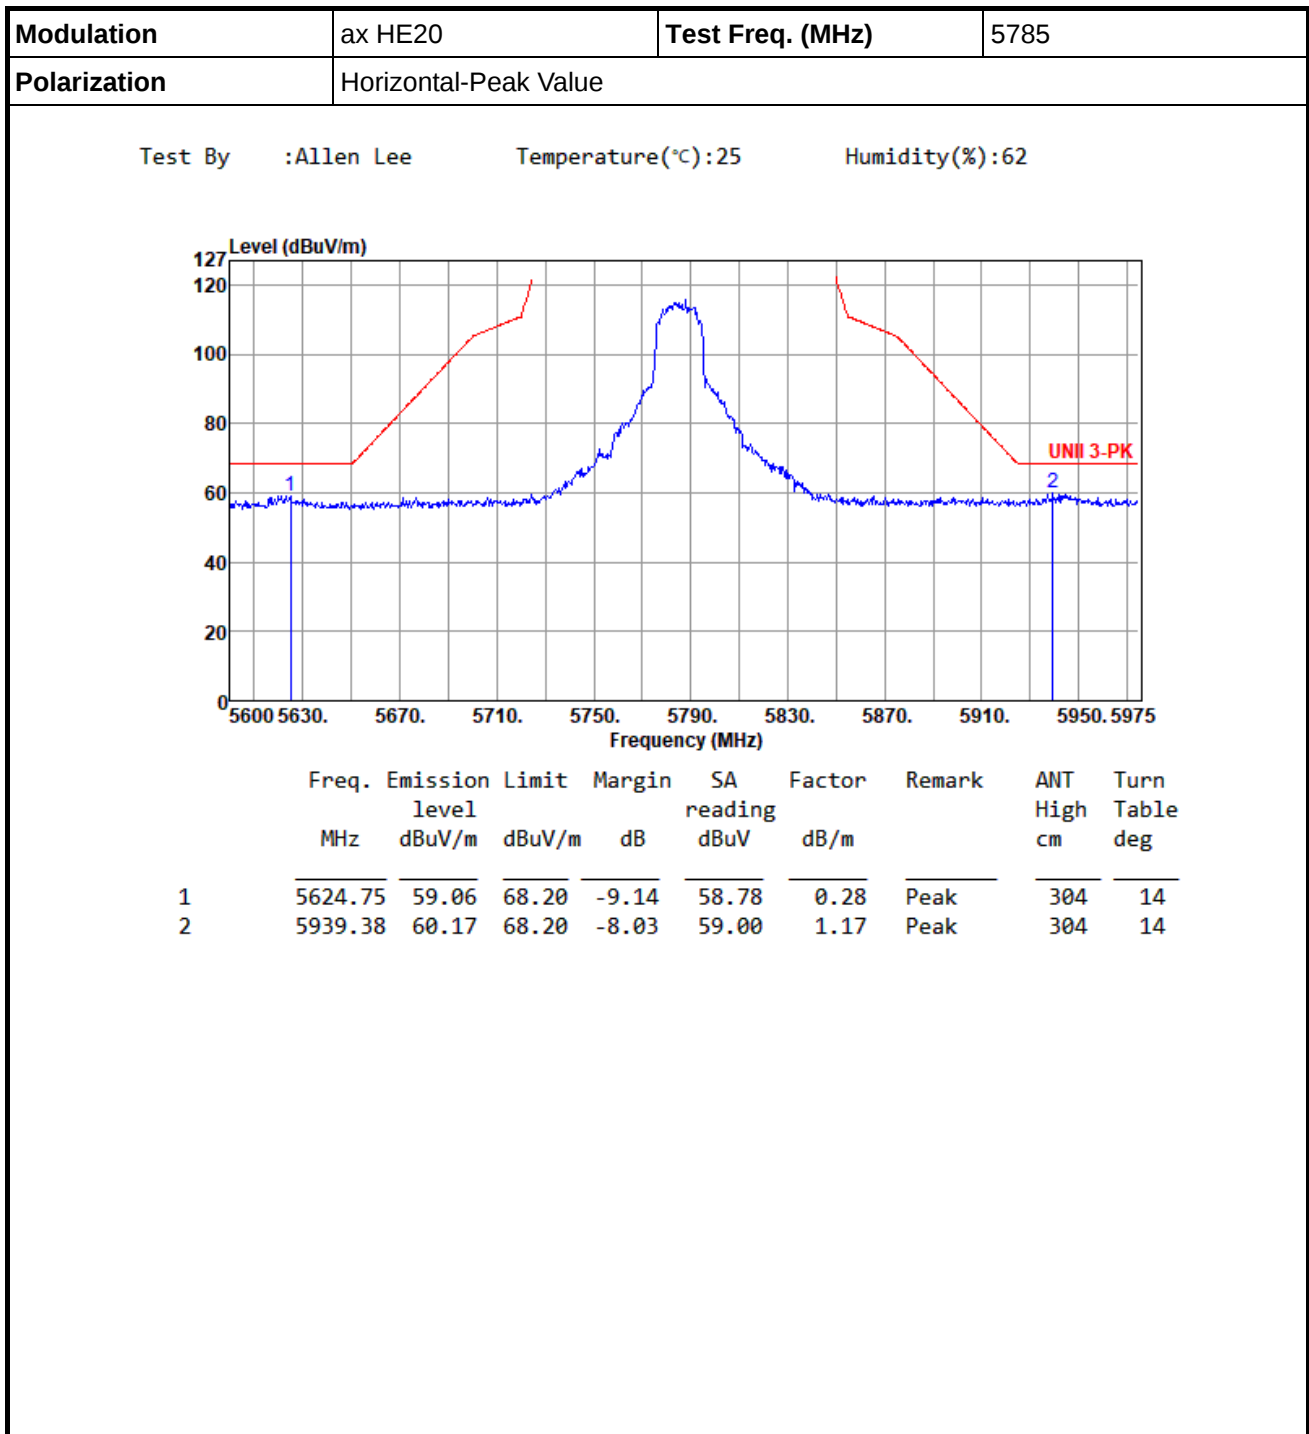

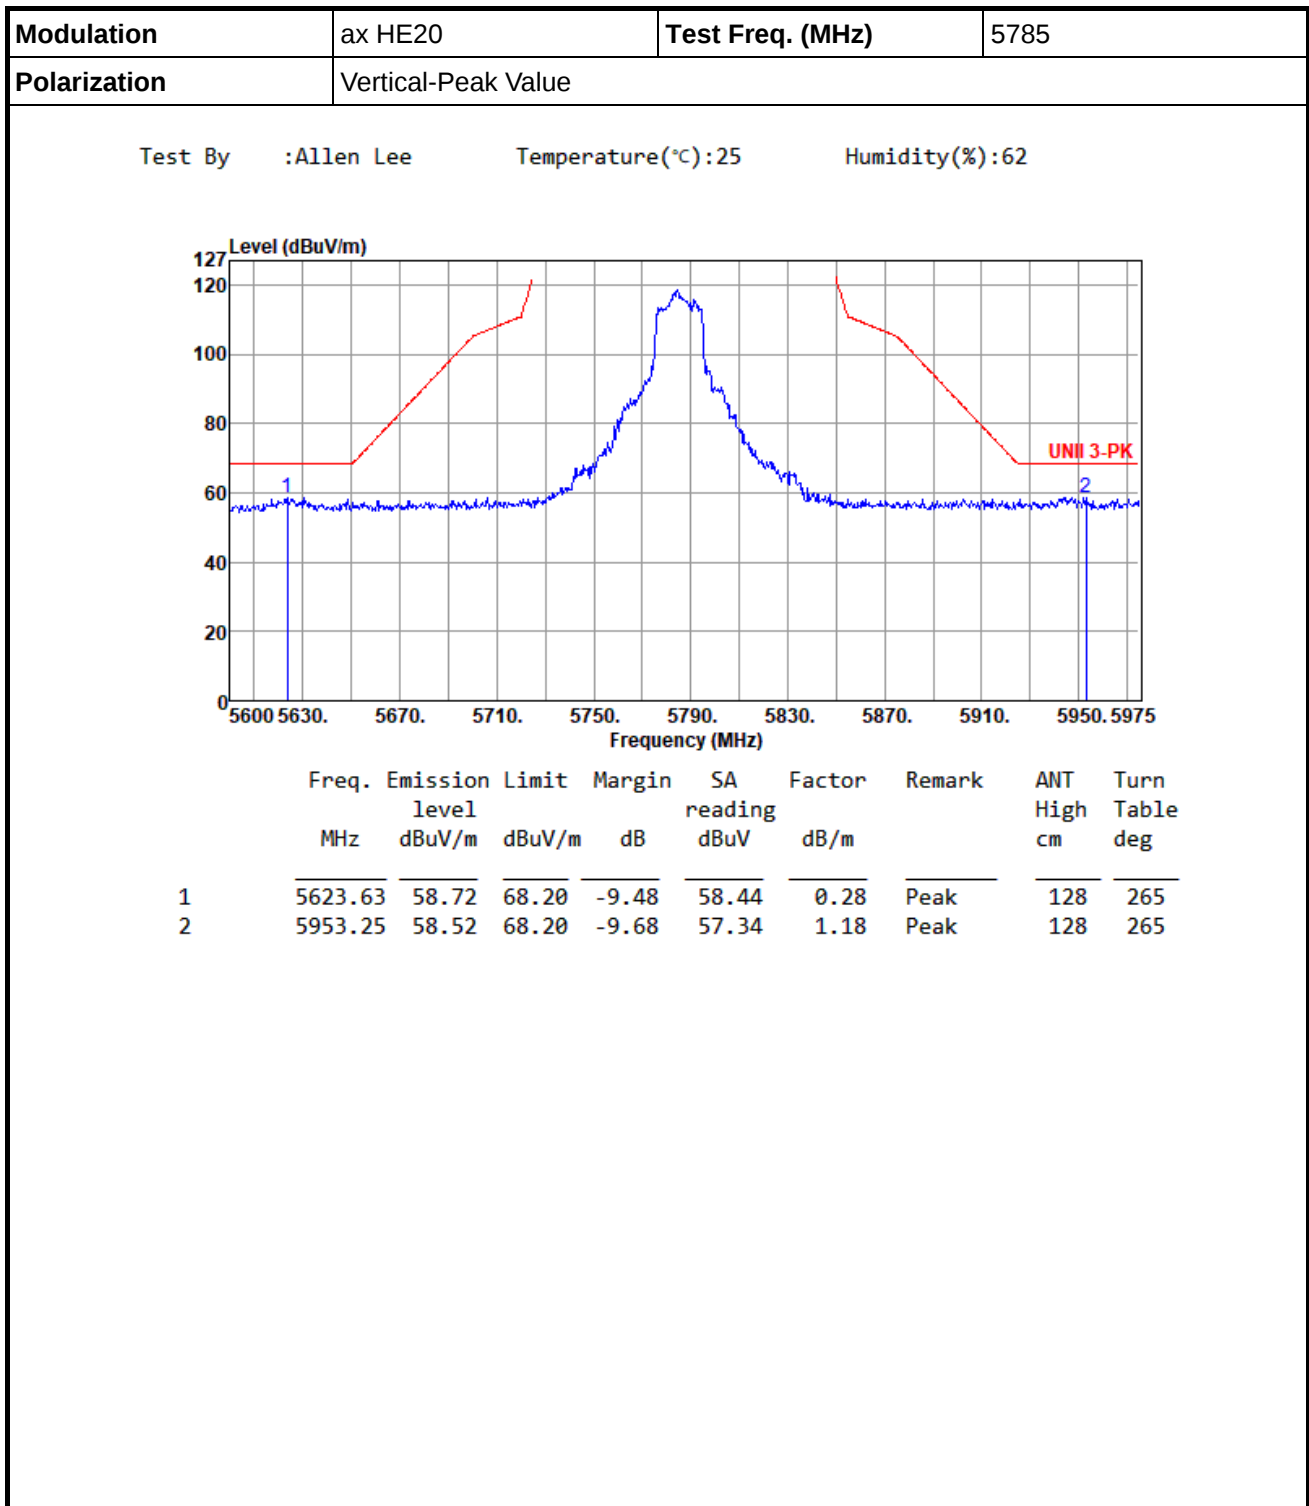


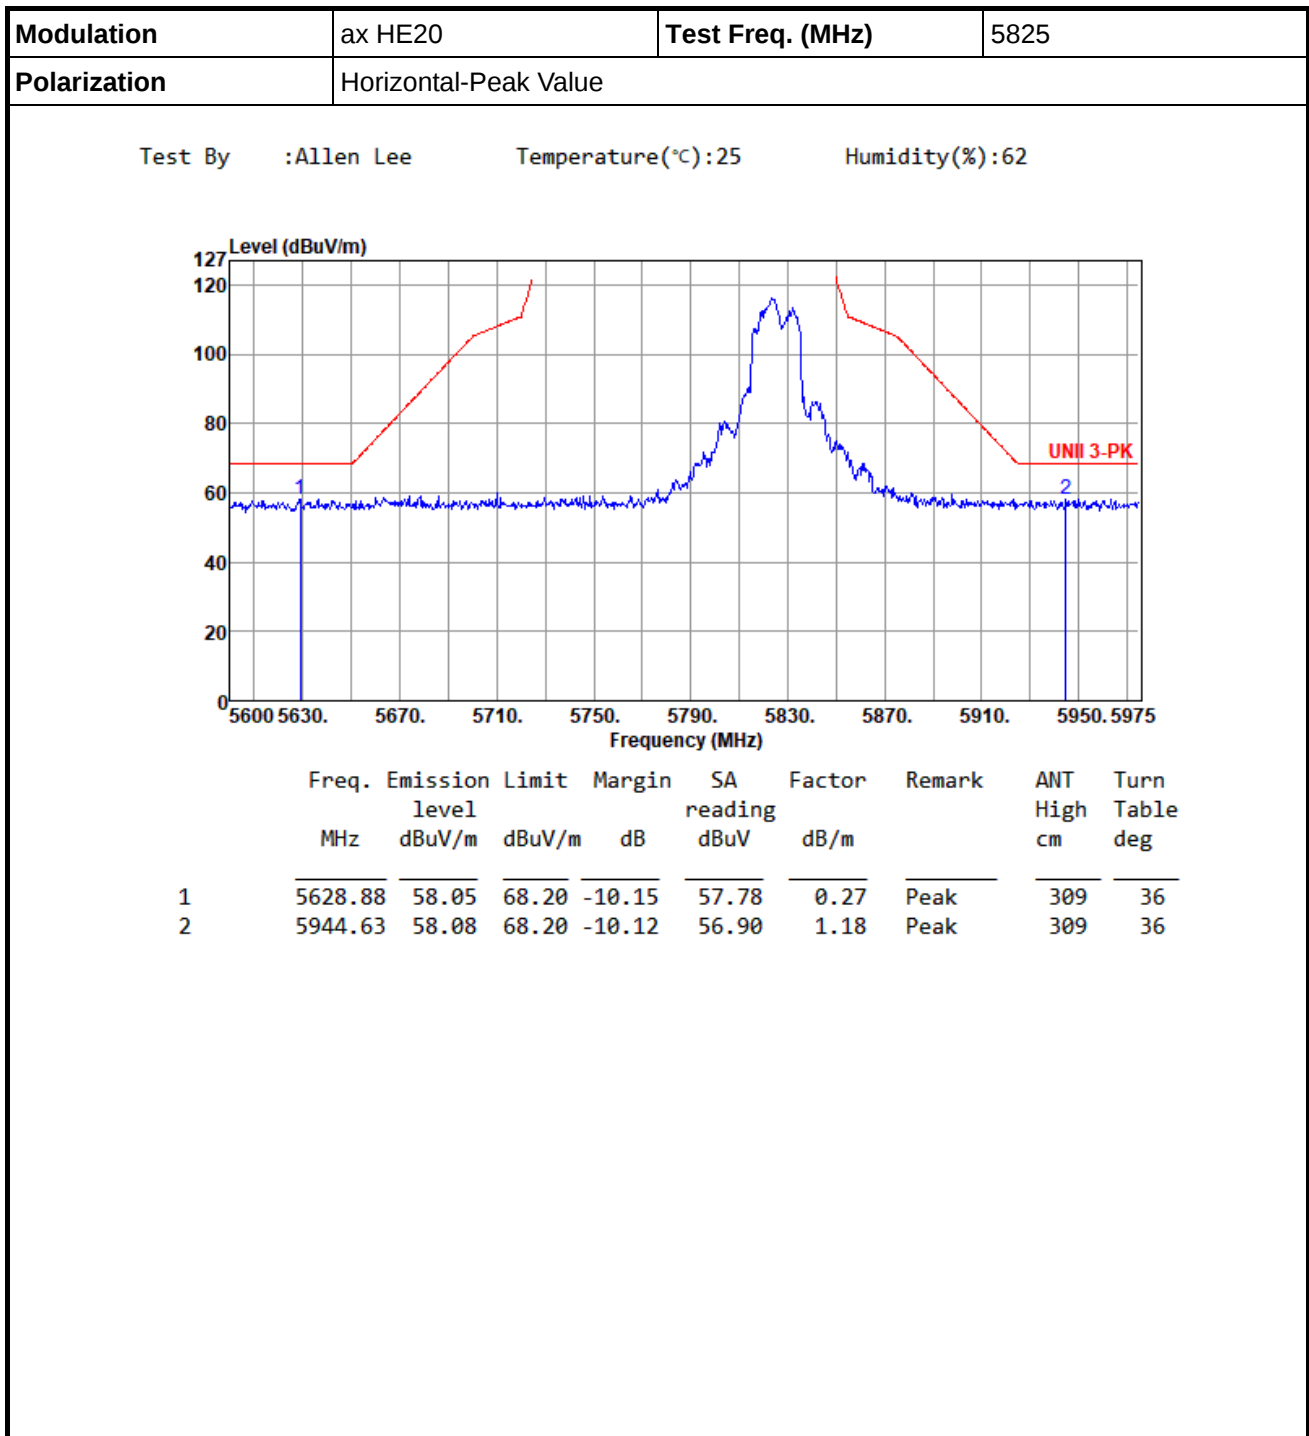


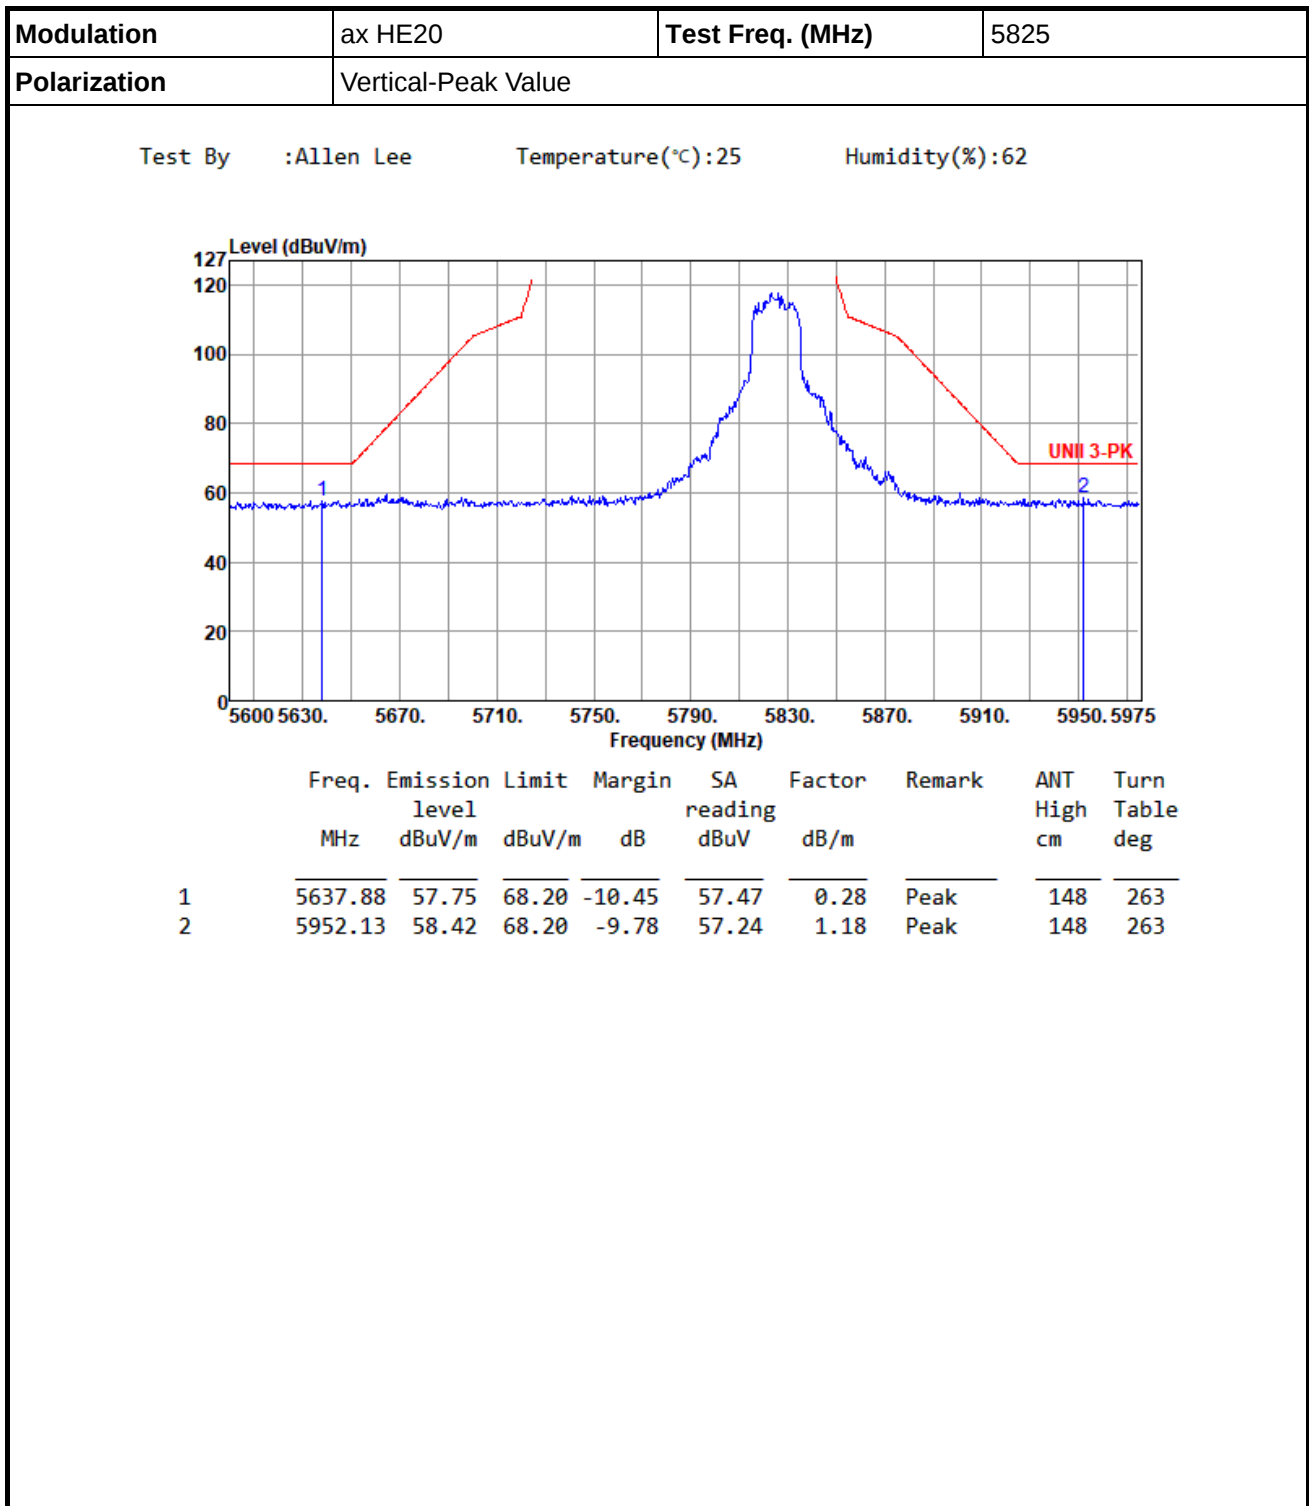






Modulation	ax HE40	Test Freq. (MHz)	5190						
Polarization	Horizontal-Peak Value								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62									
Level (dBuV/m) UNII 1-2-PK Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5144.70	67.62	74.00	-6.38	67.13	0.49	Peak	179	24
2	5355.60	57.04	74.00	-16.96	57.13	-0.09	Peak	179	24

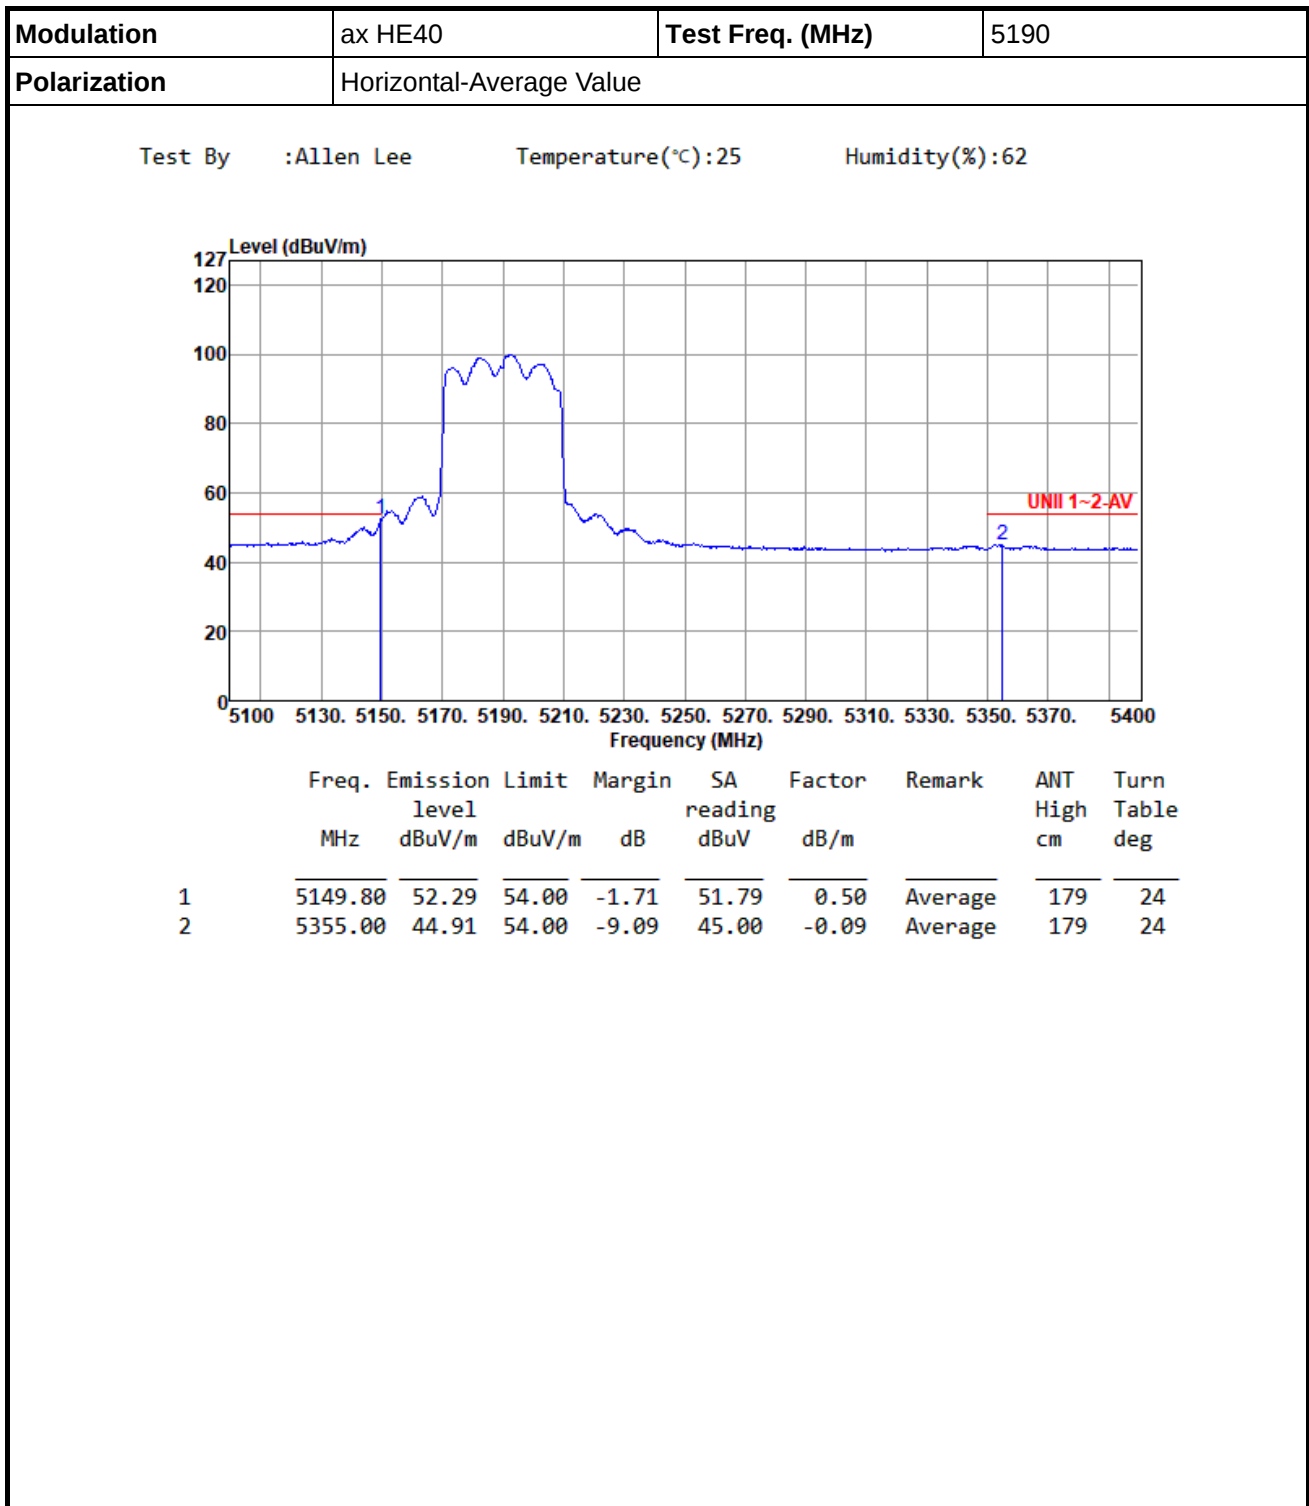


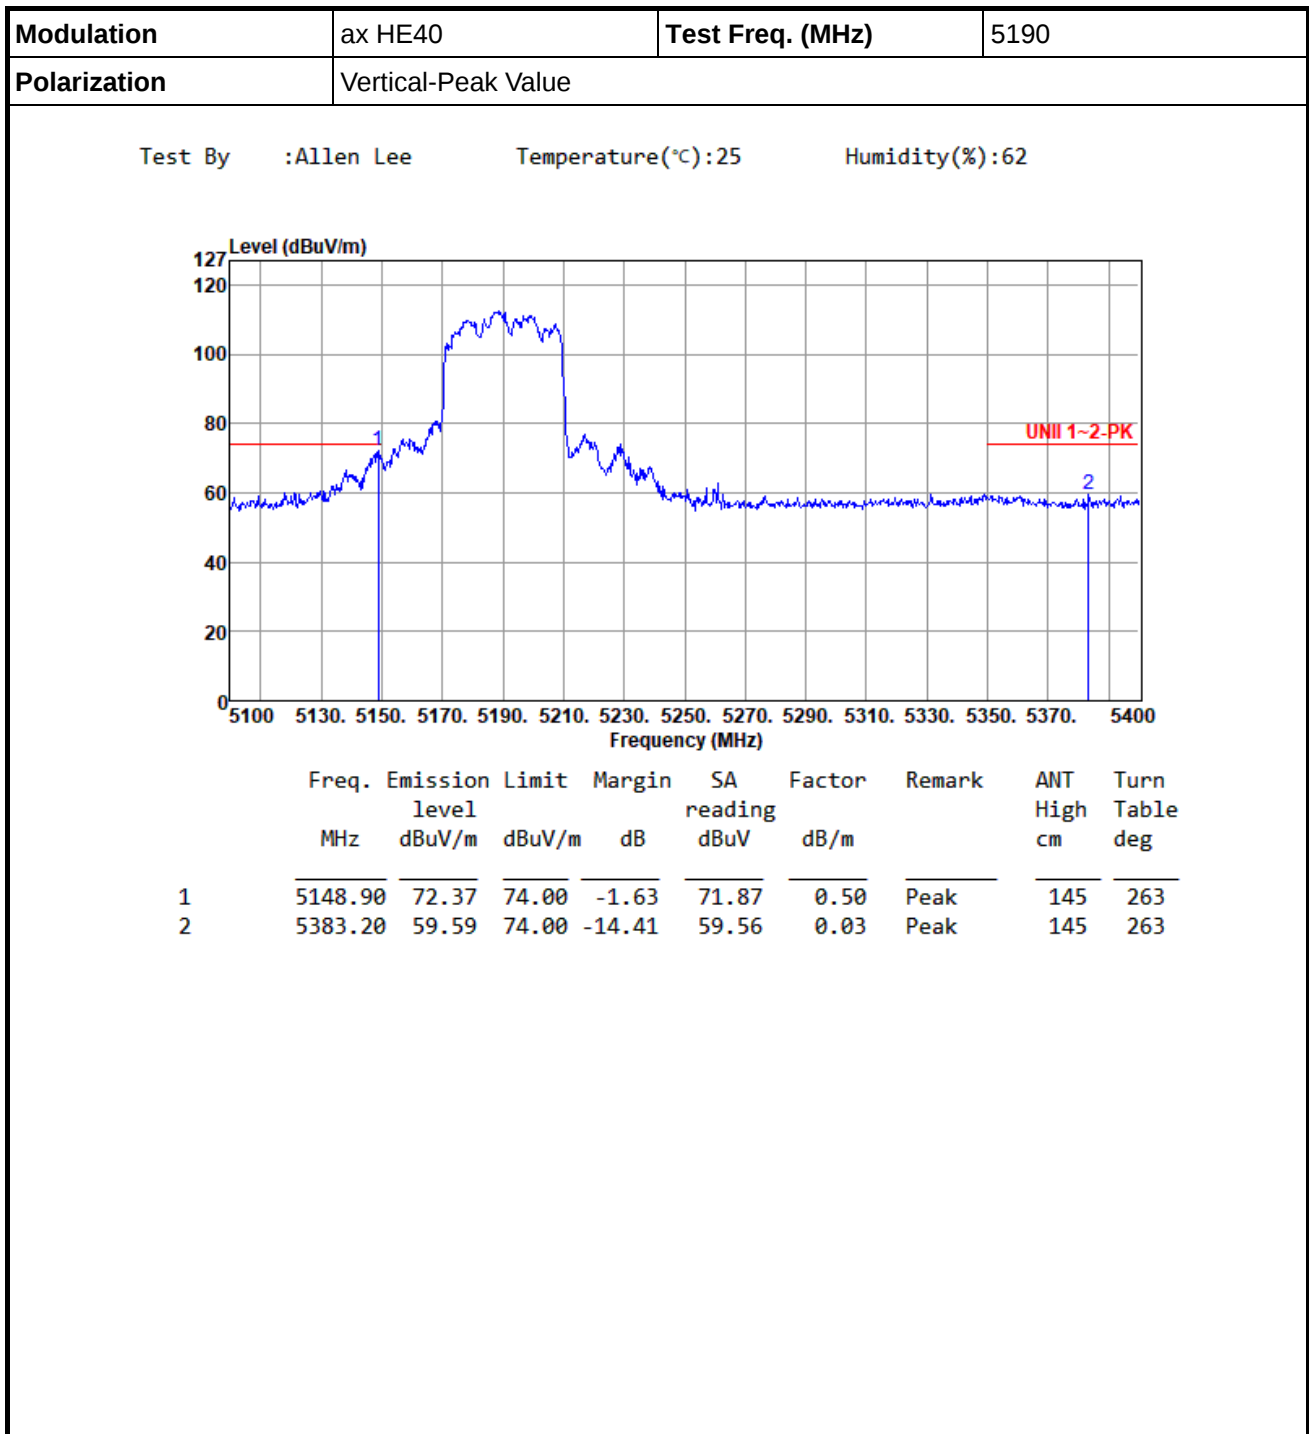


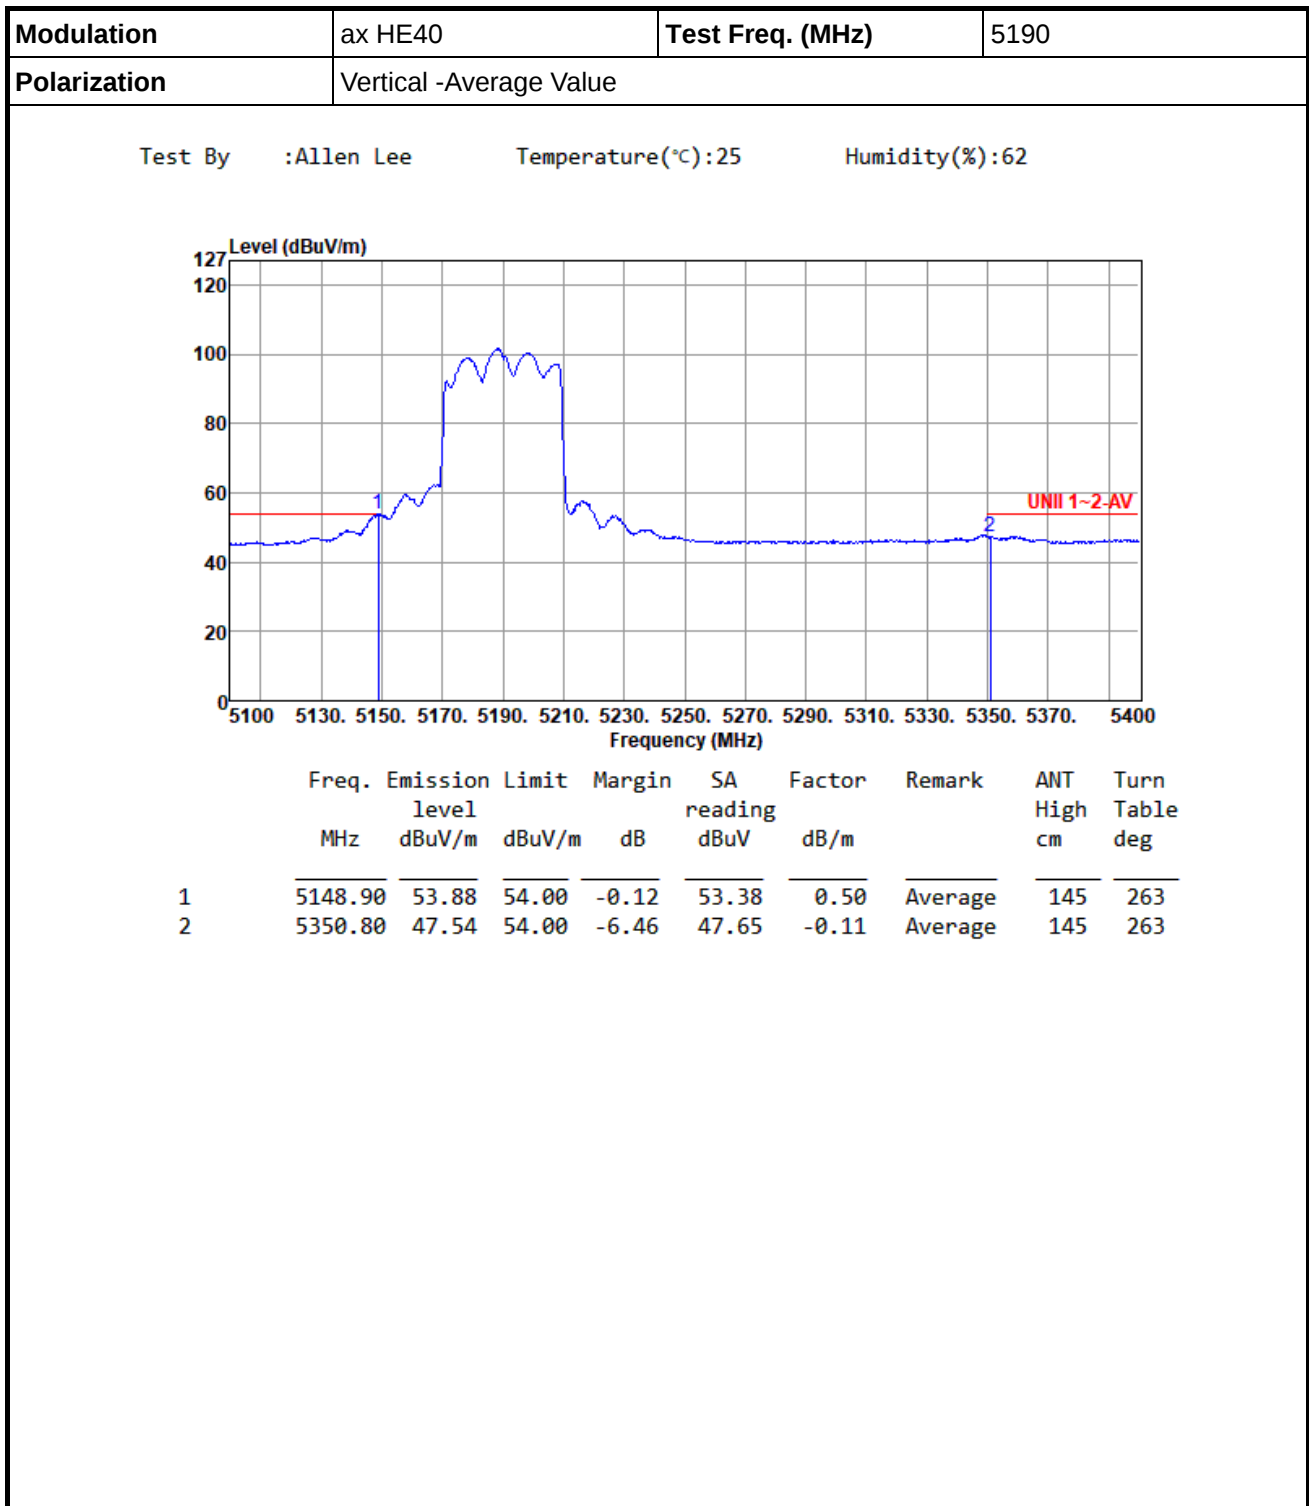


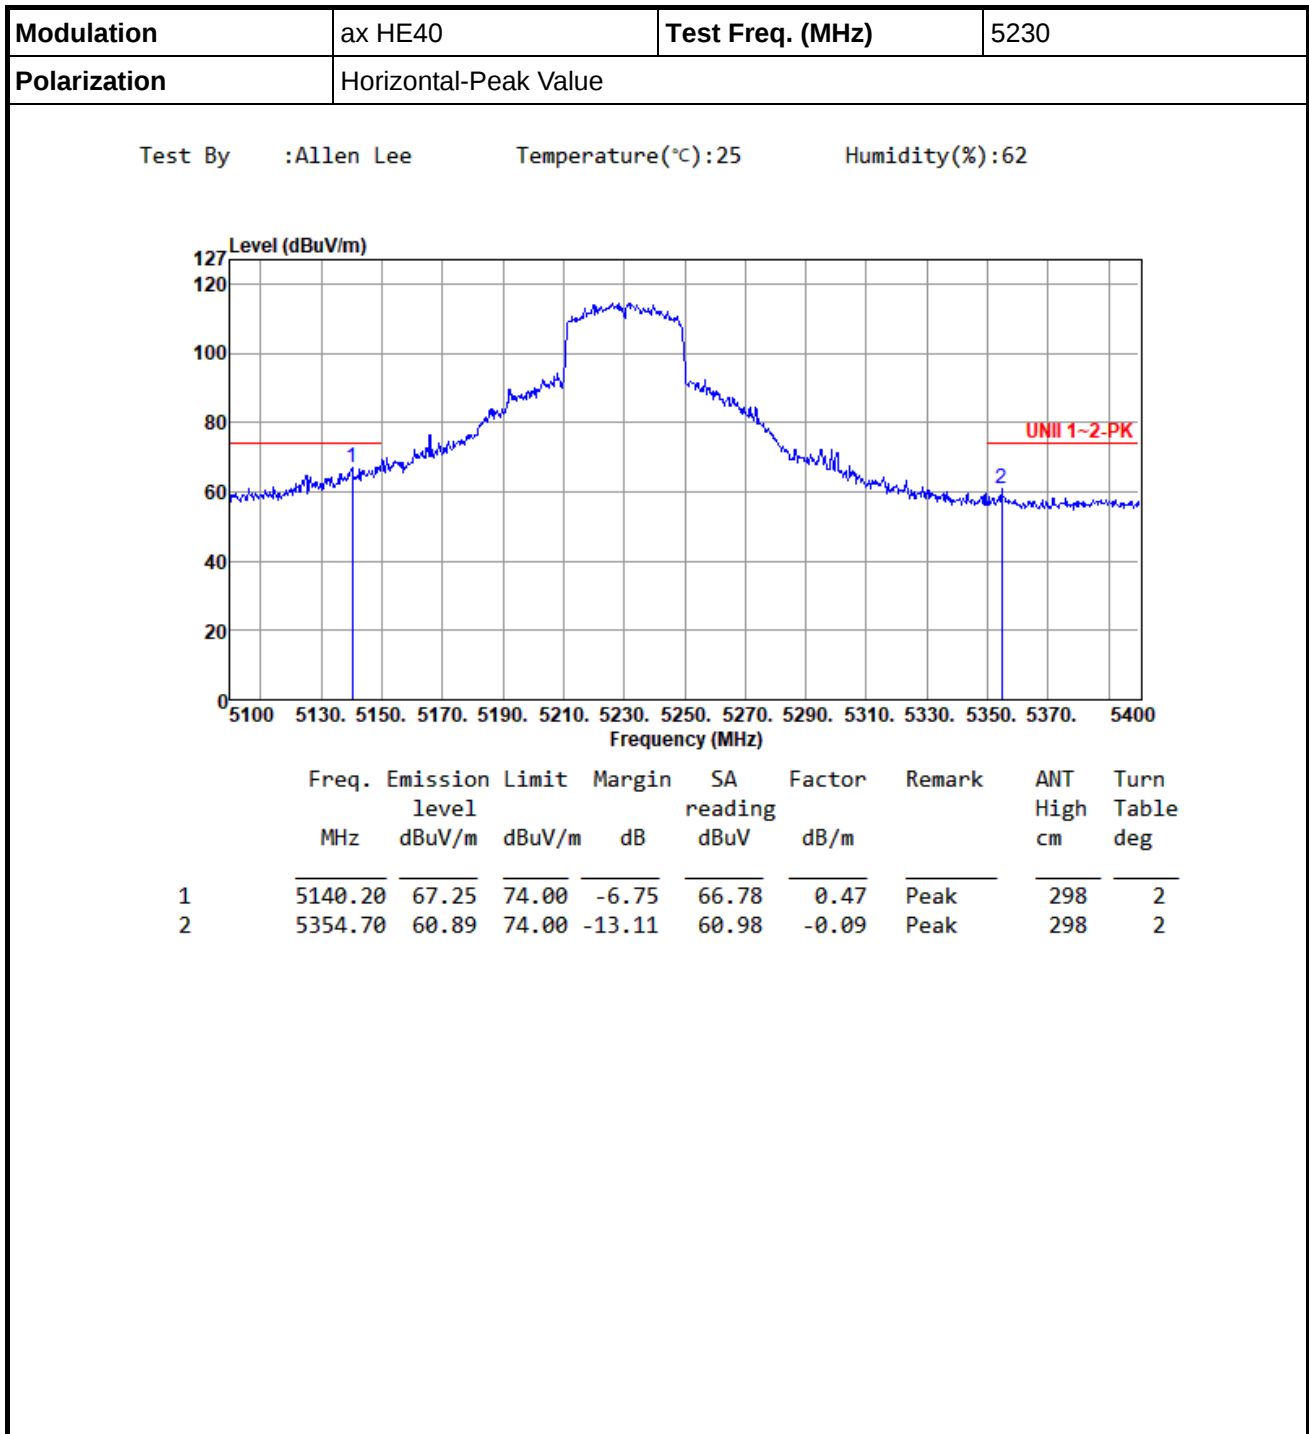


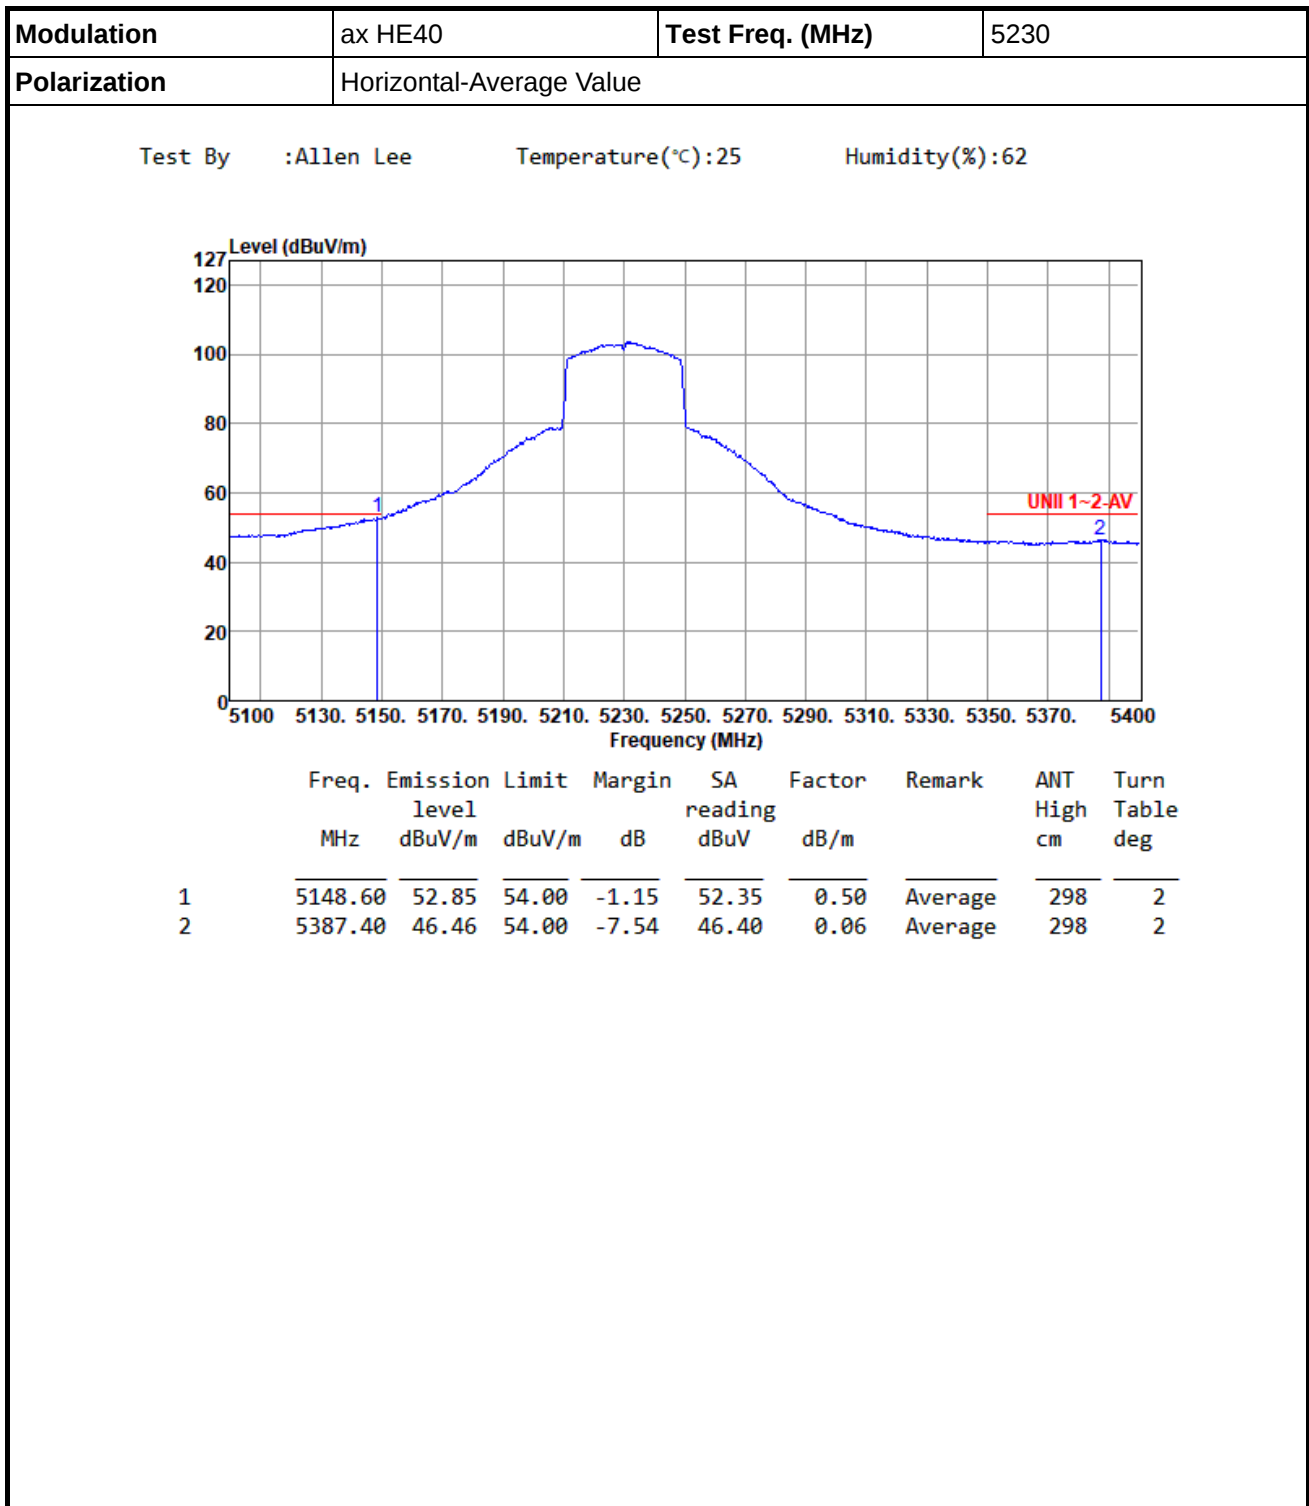


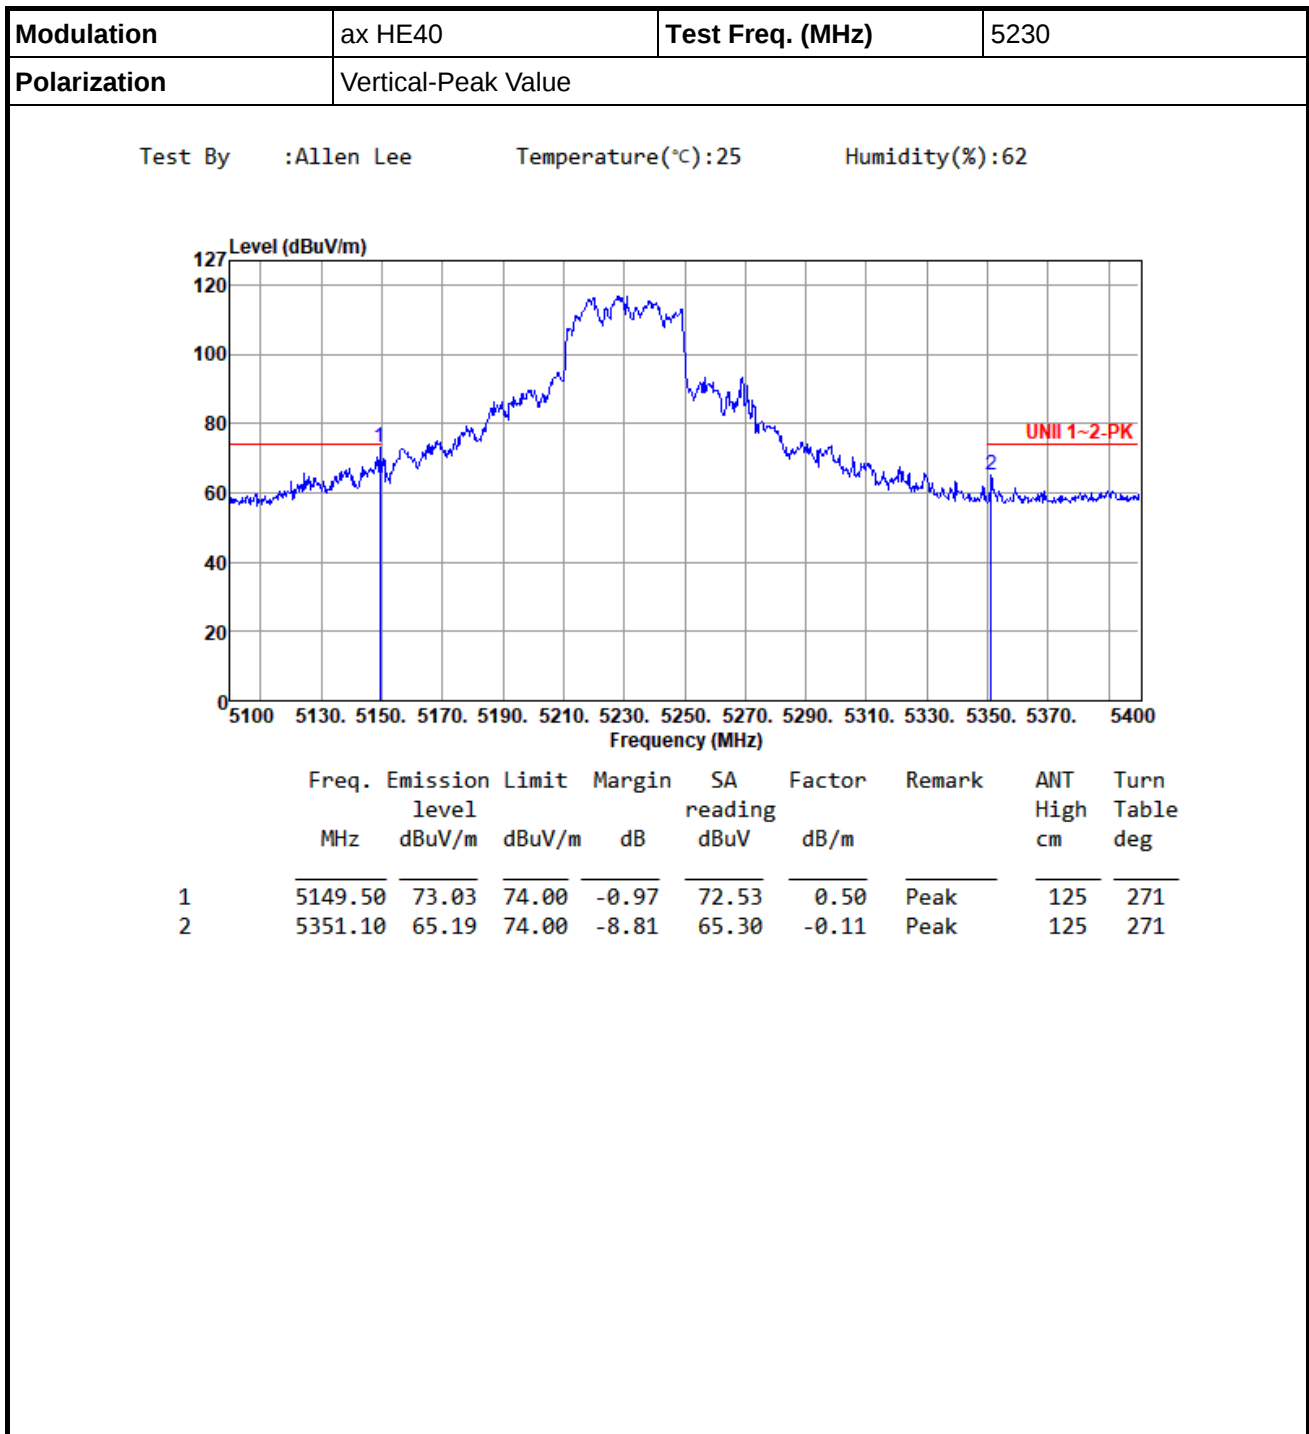


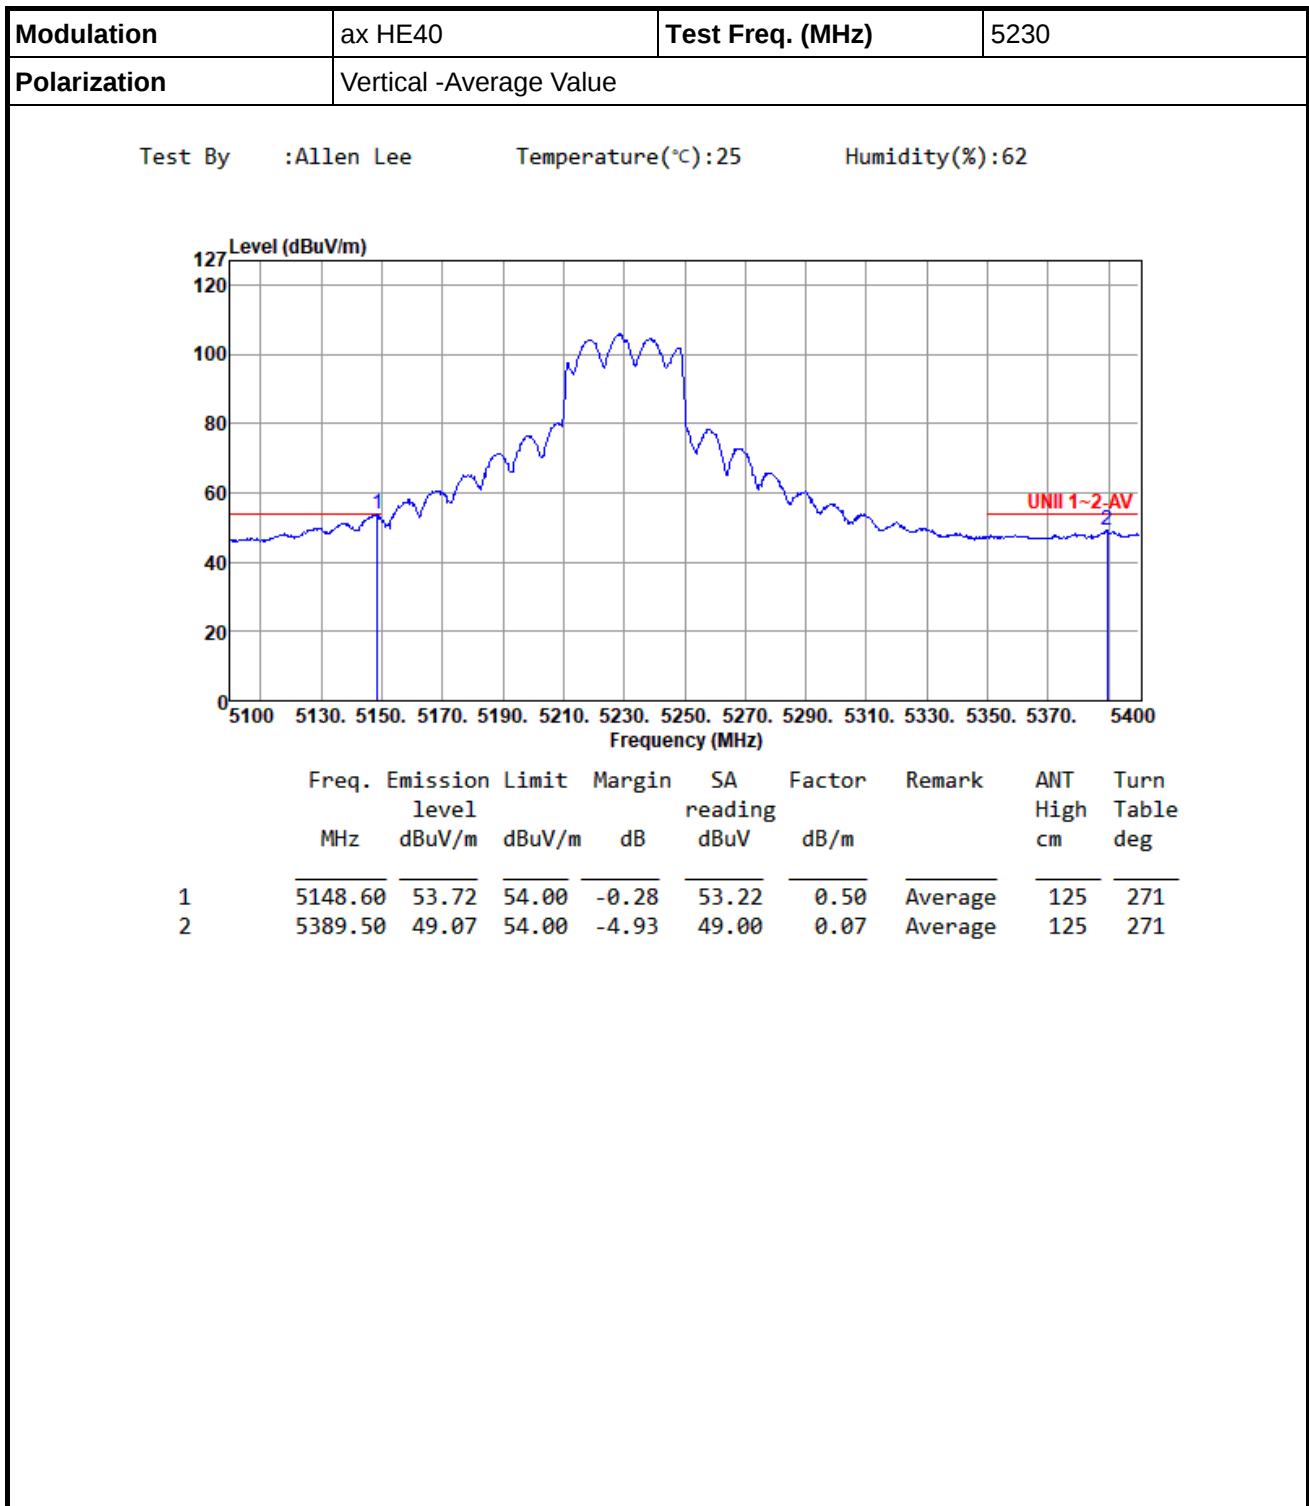


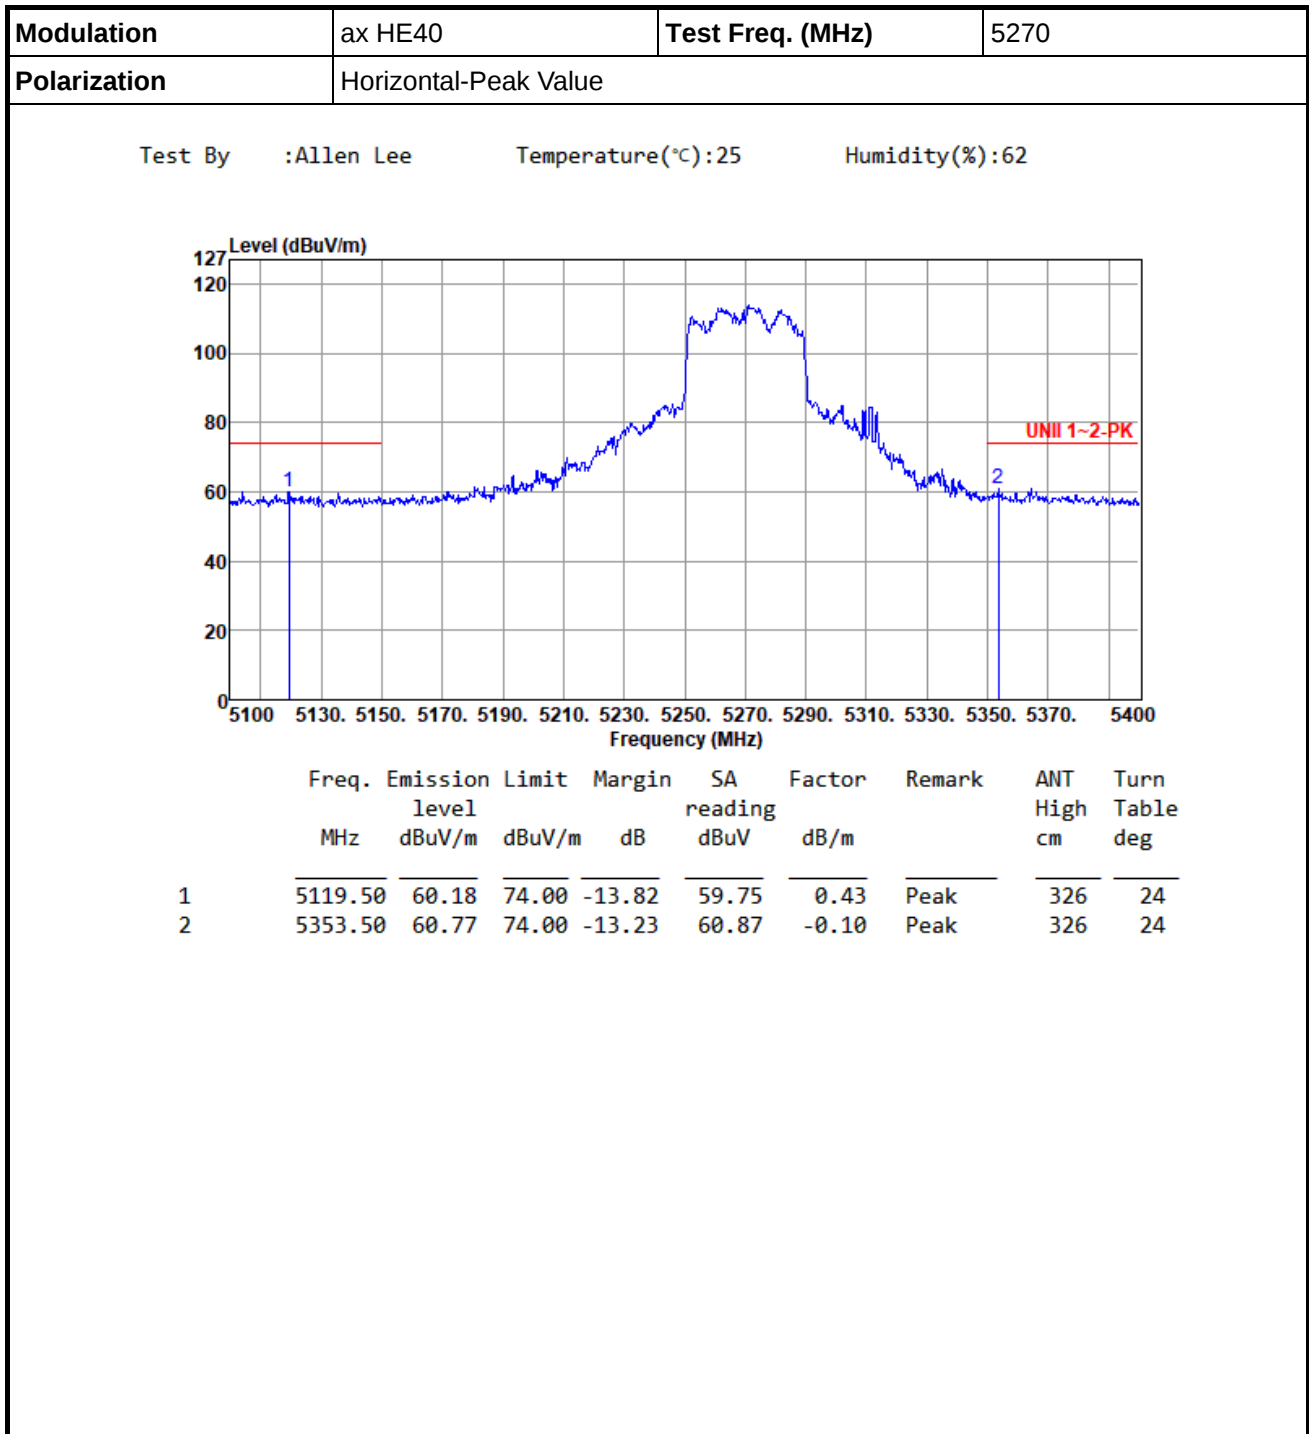


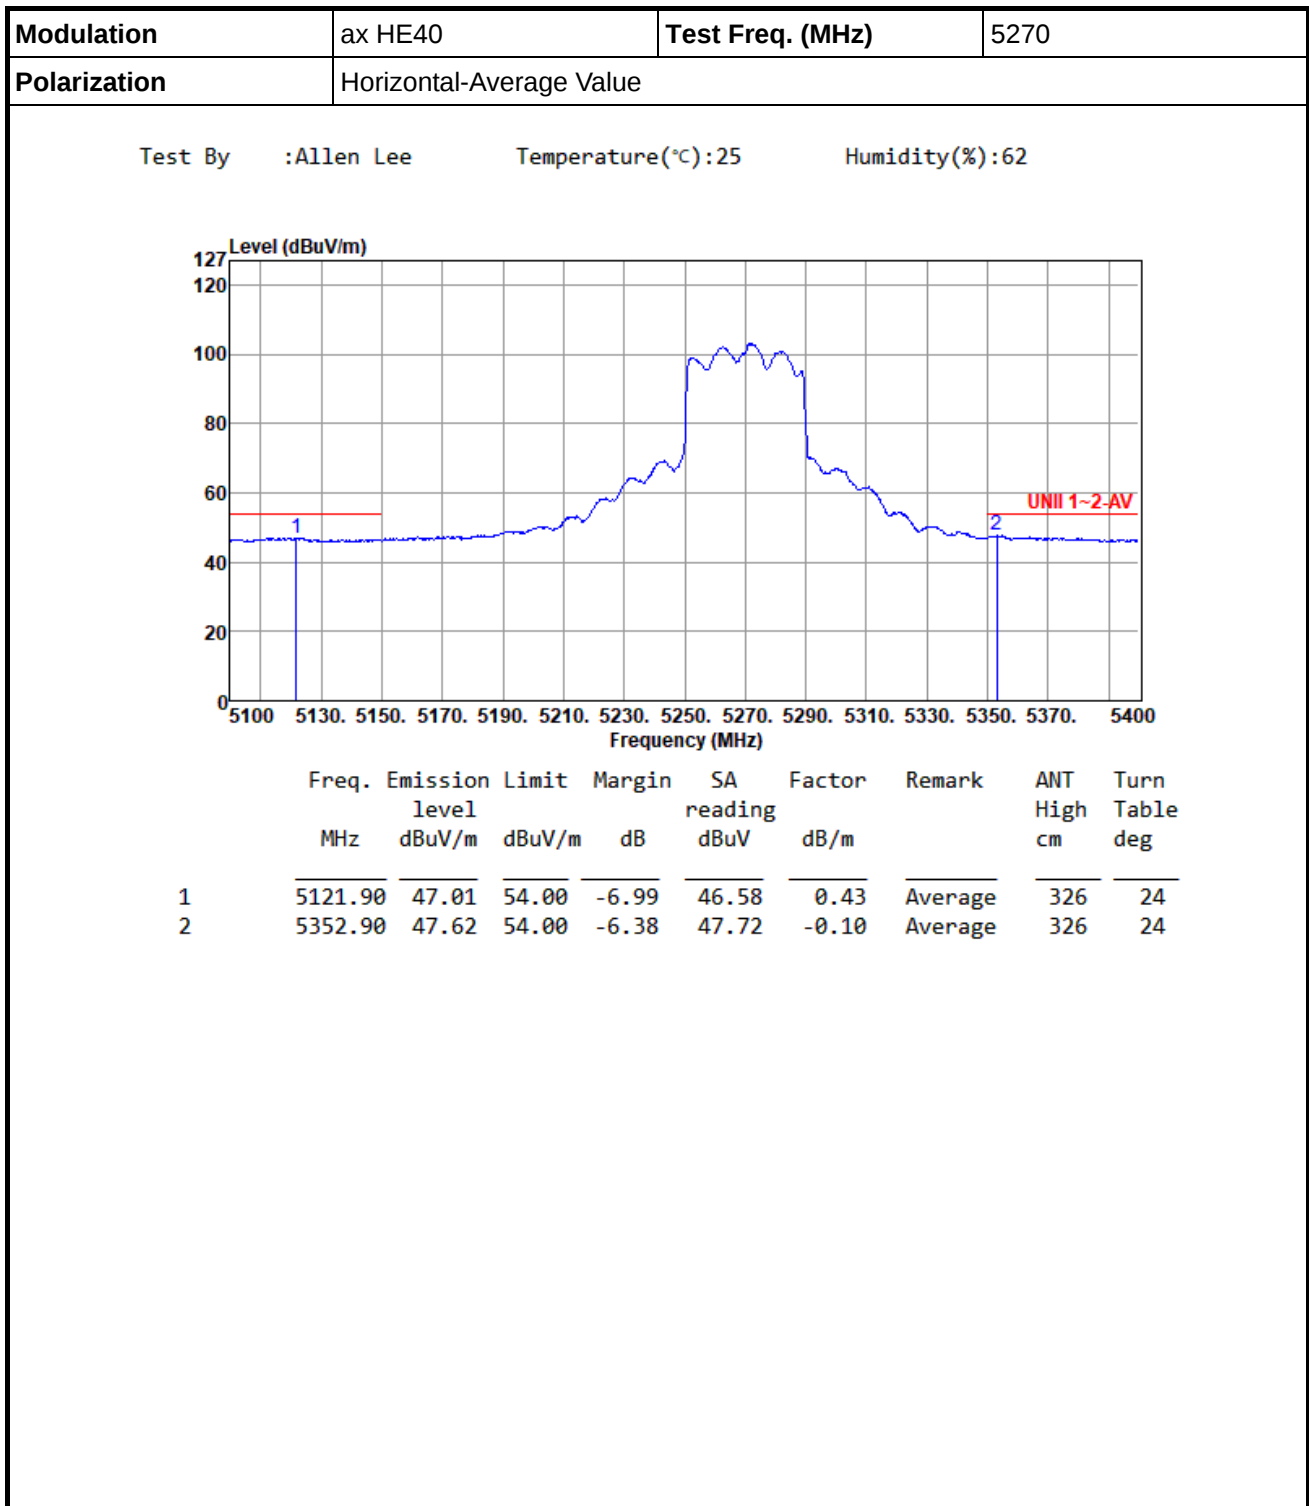


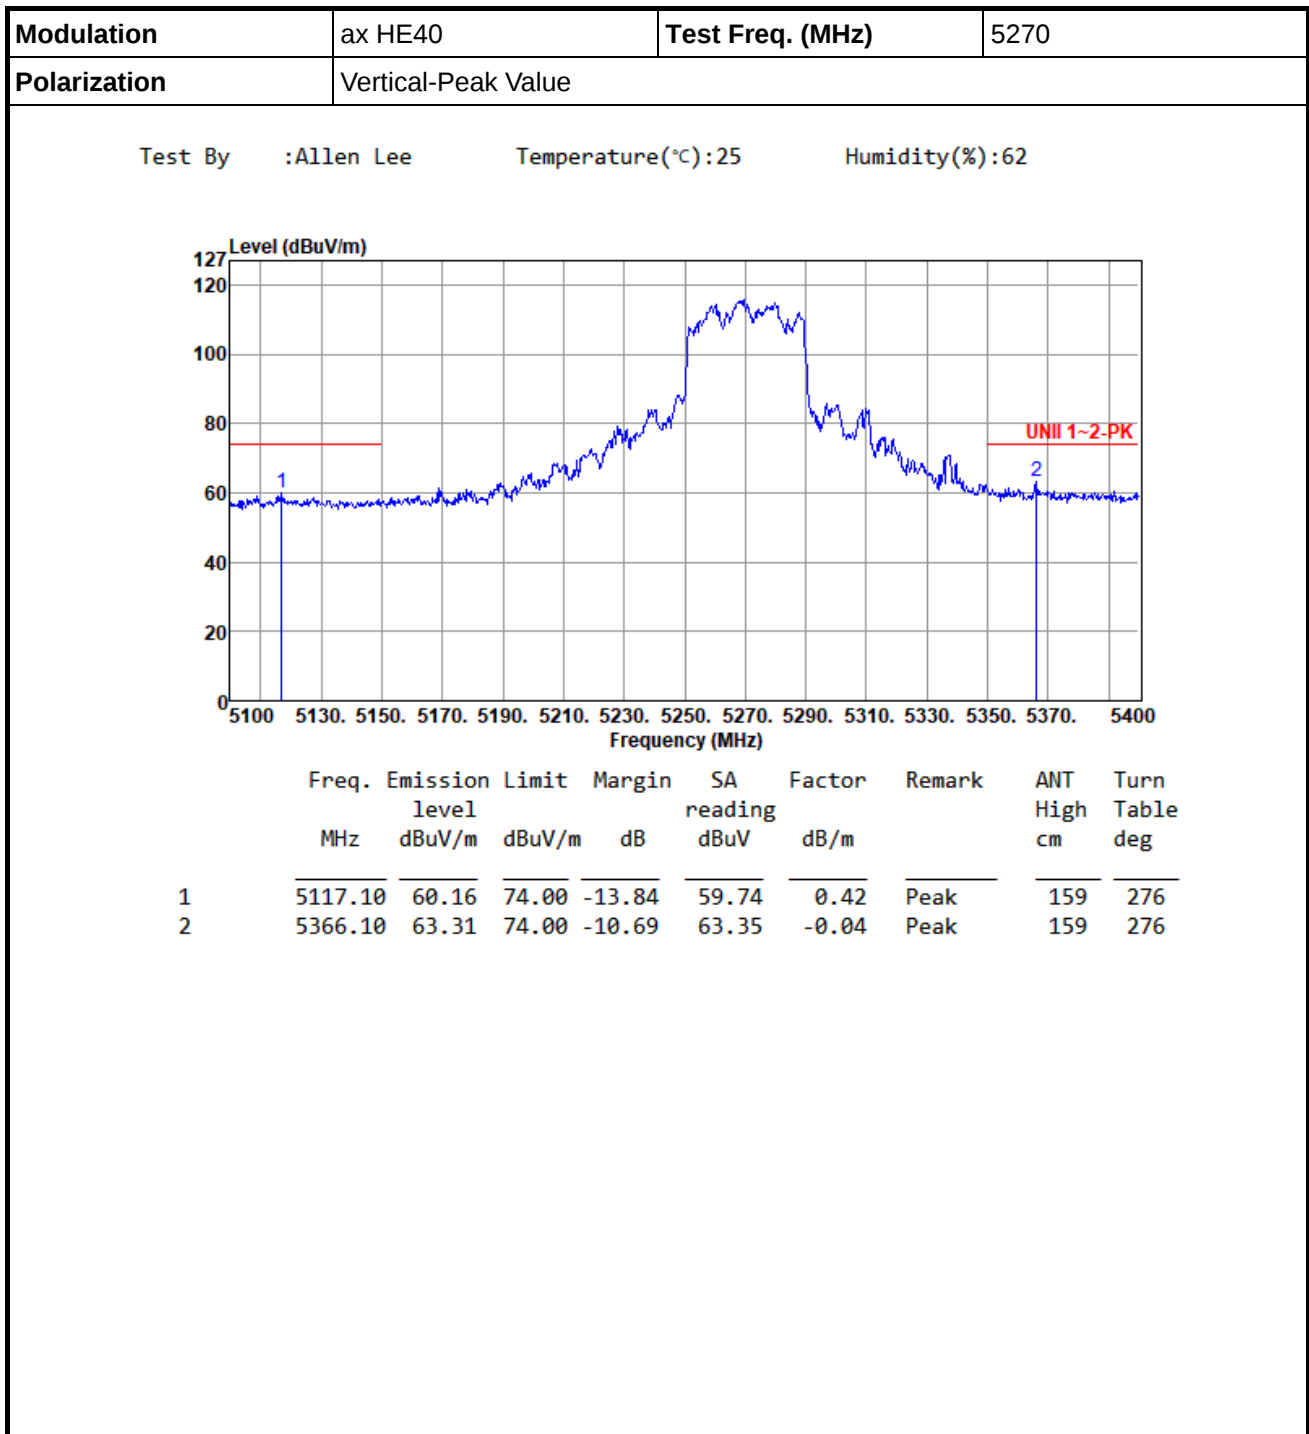


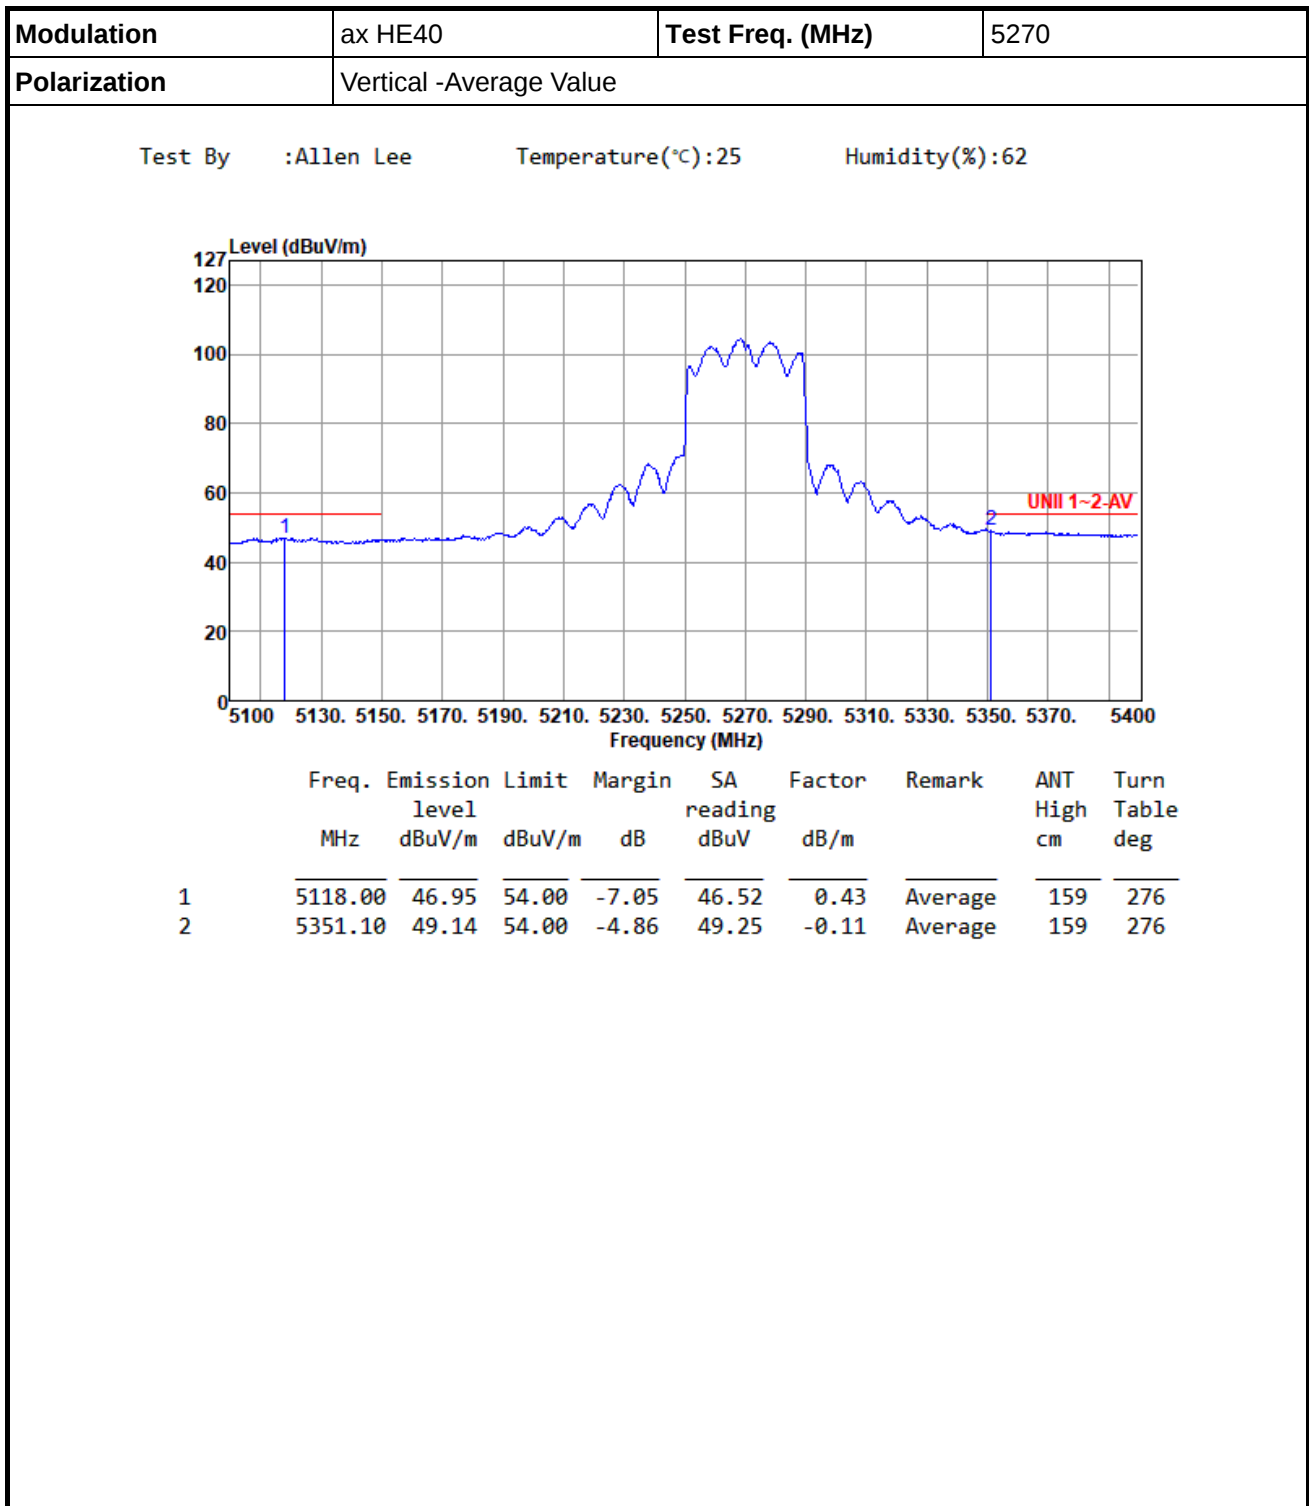


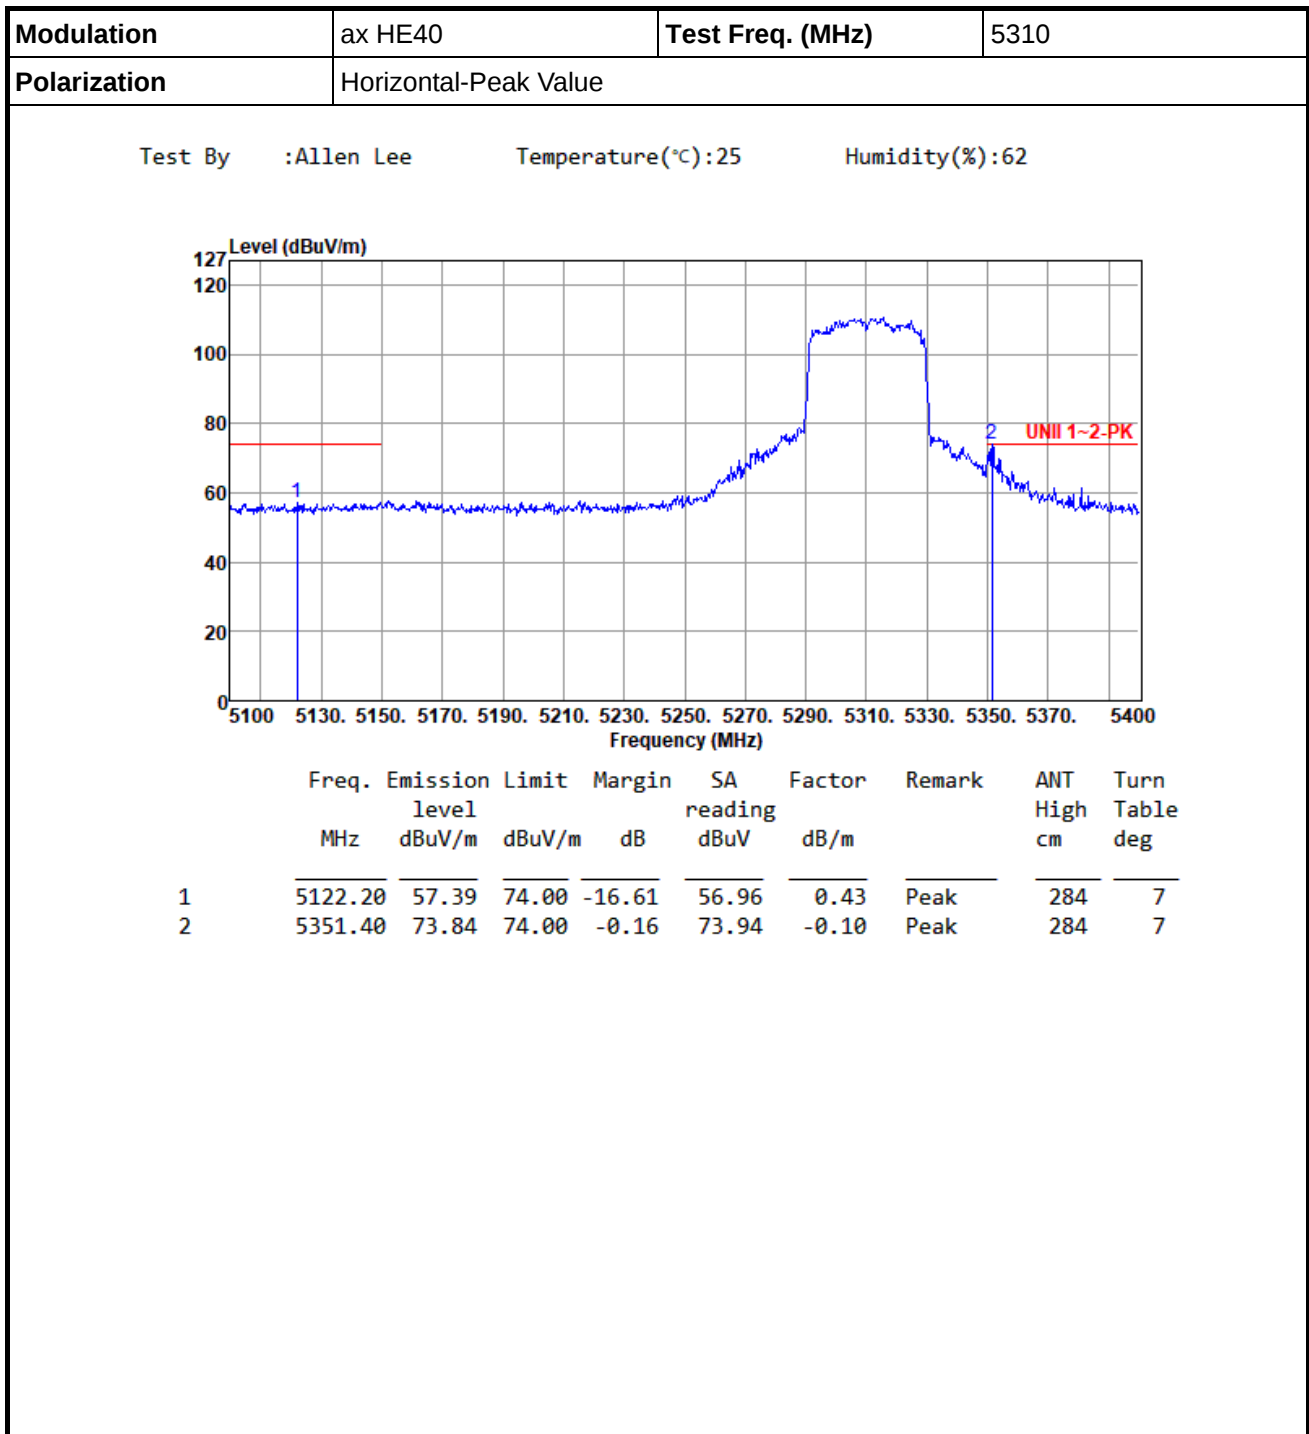

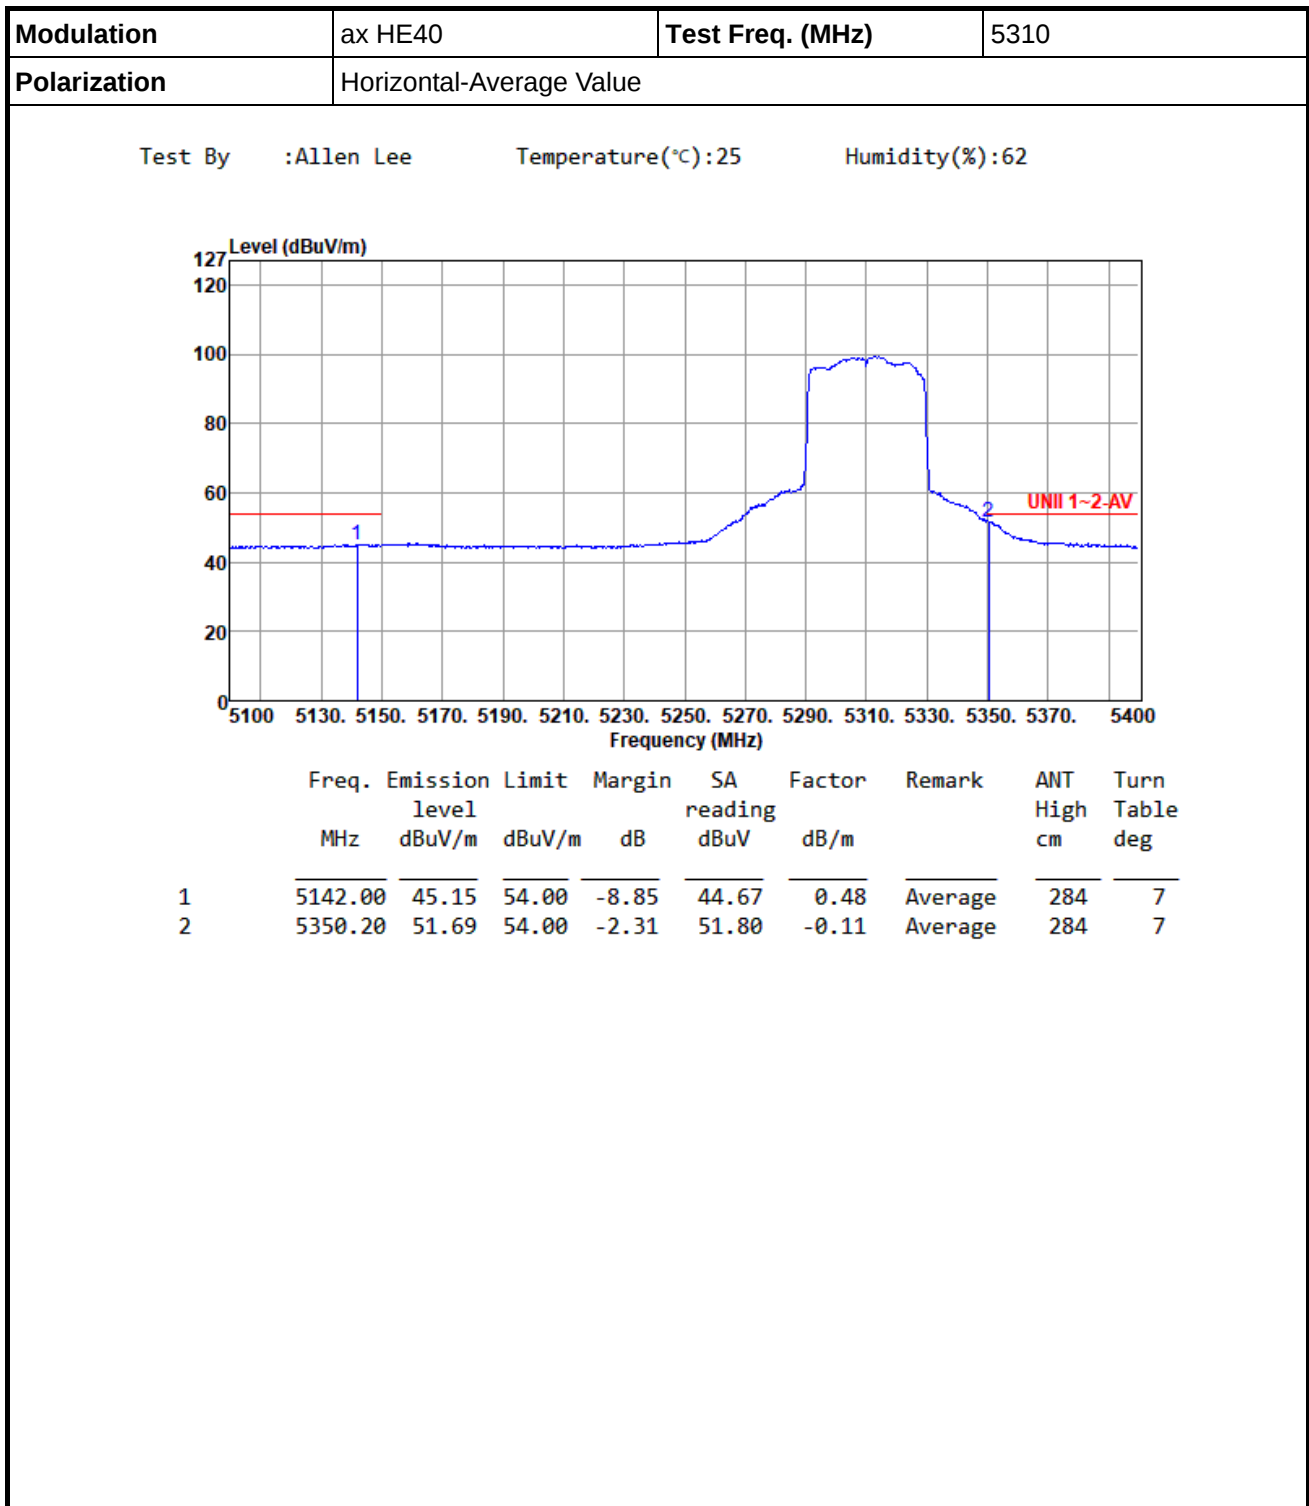


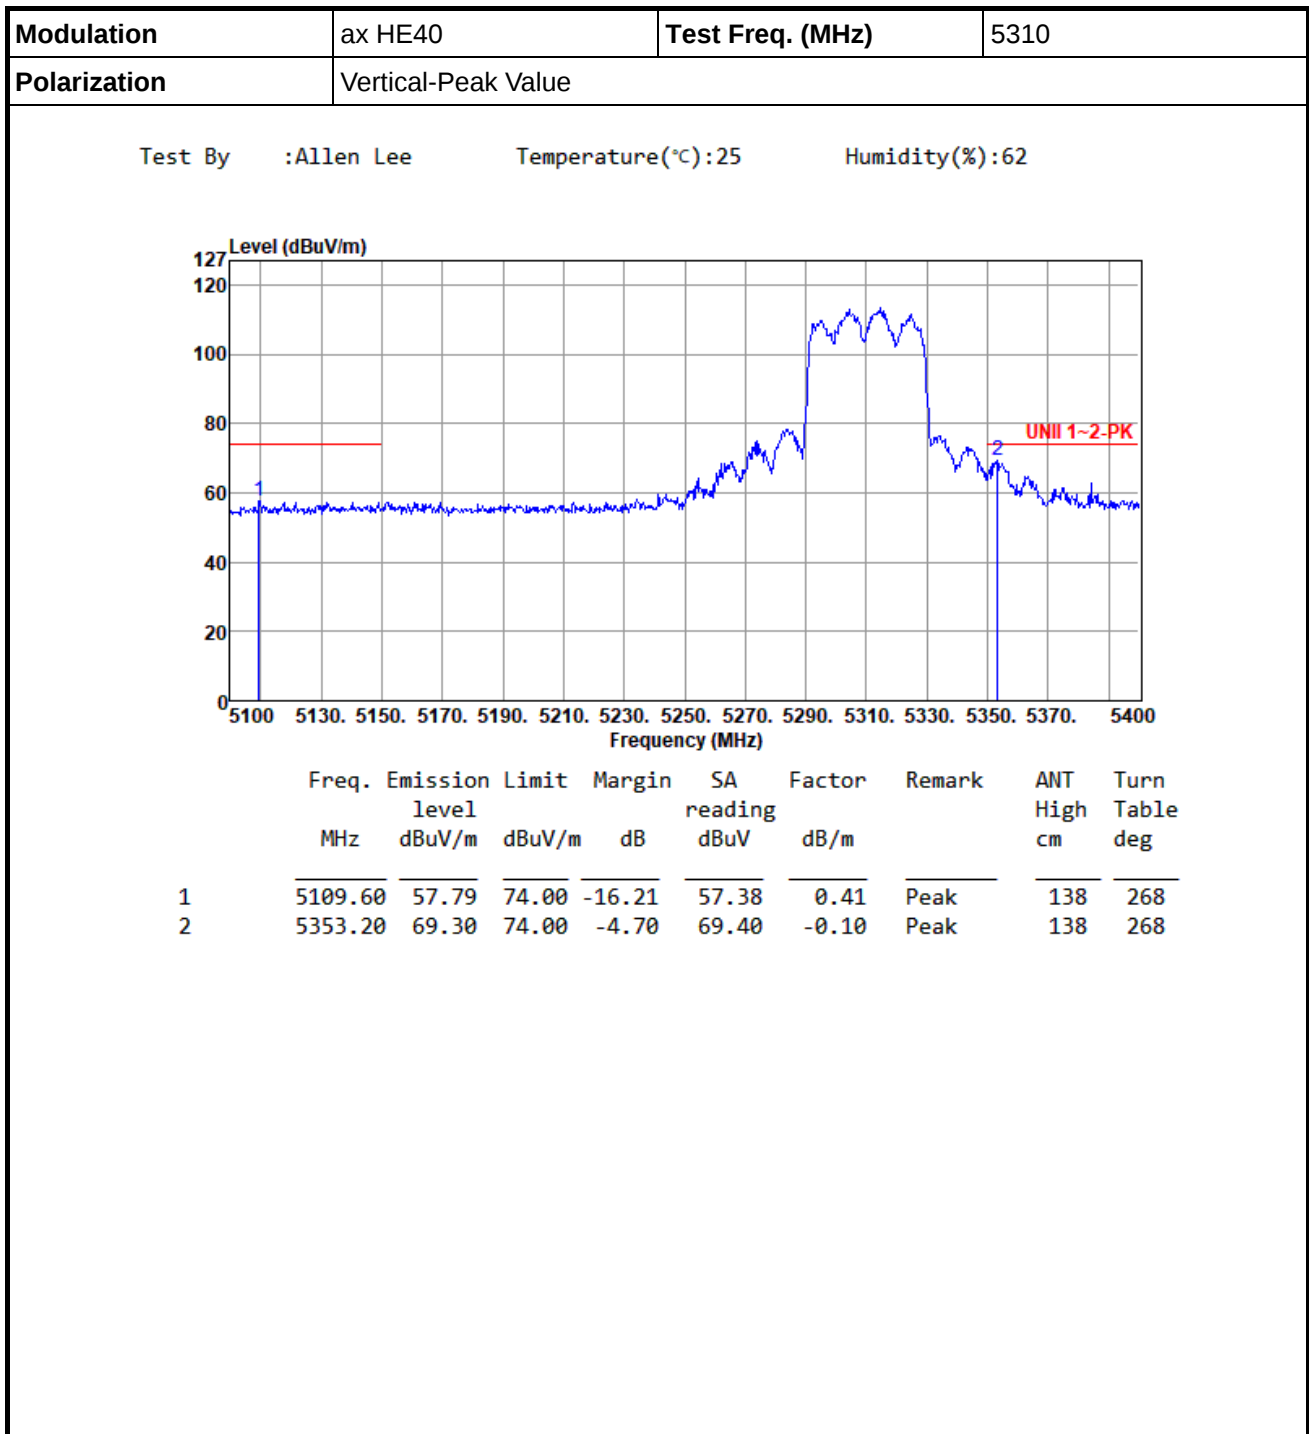


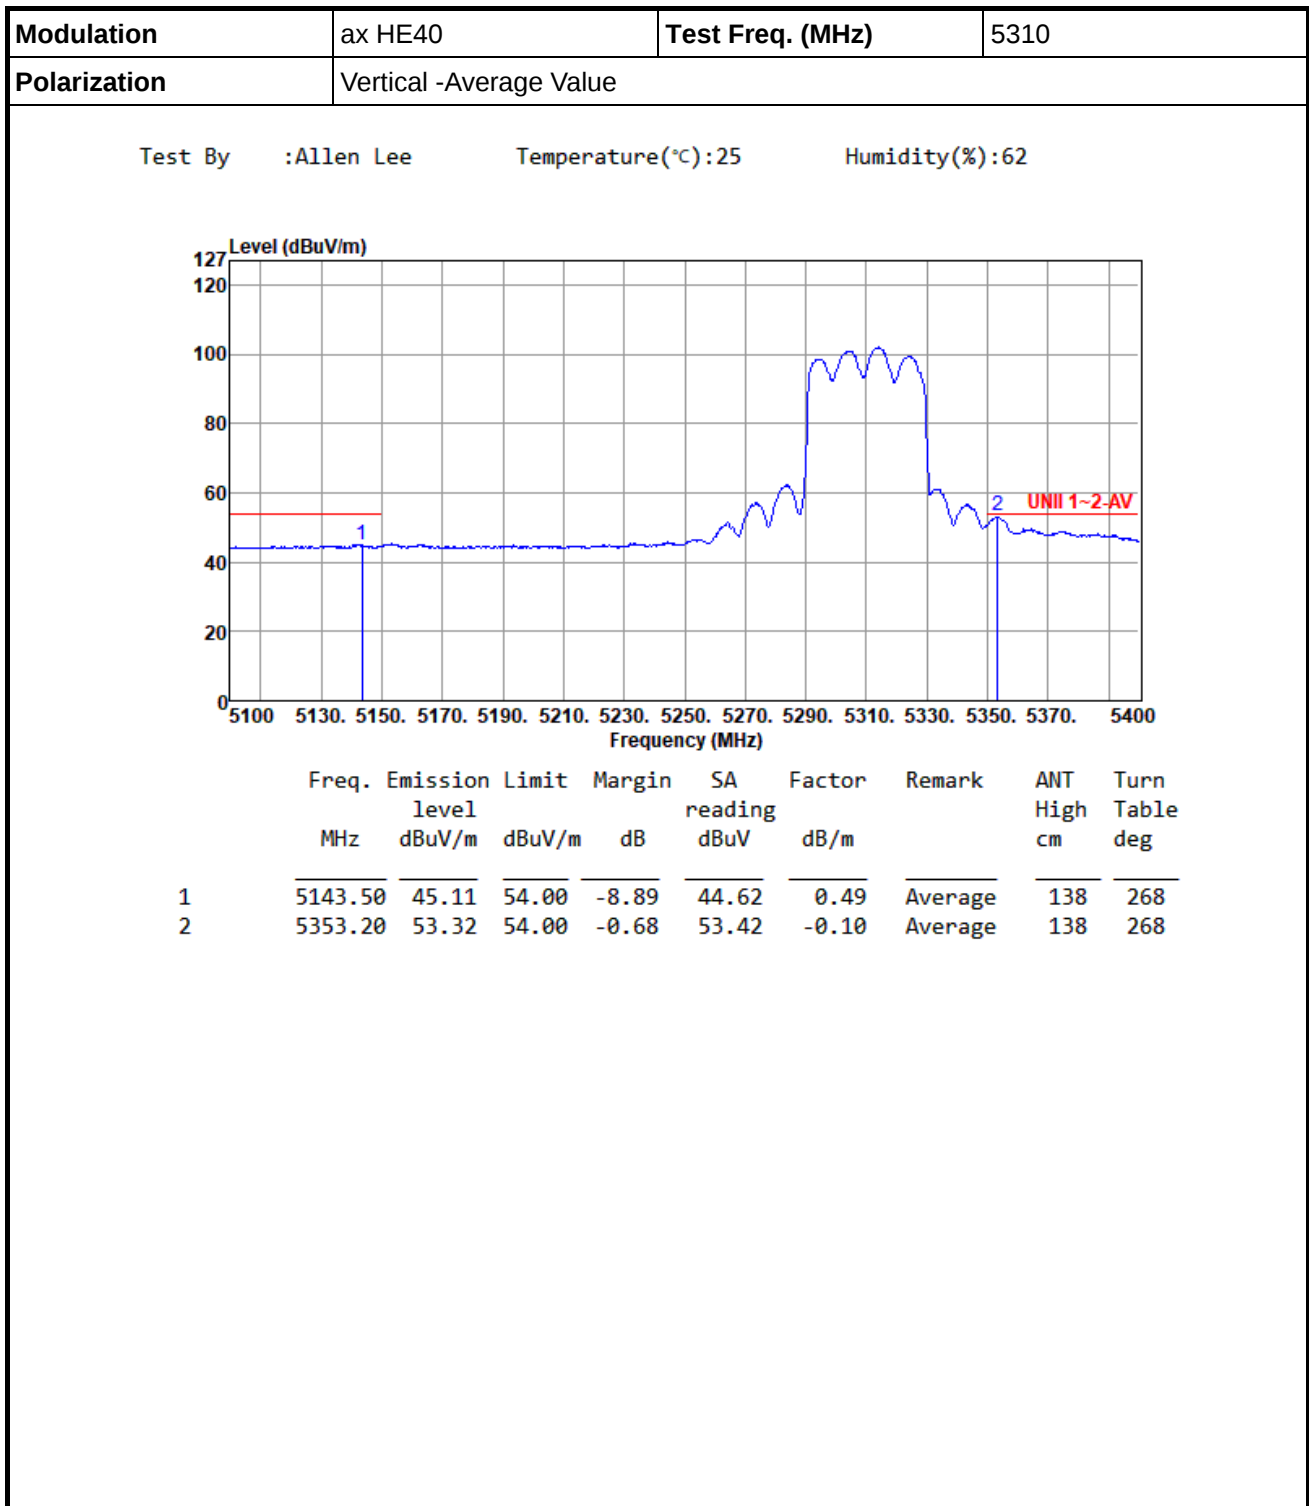

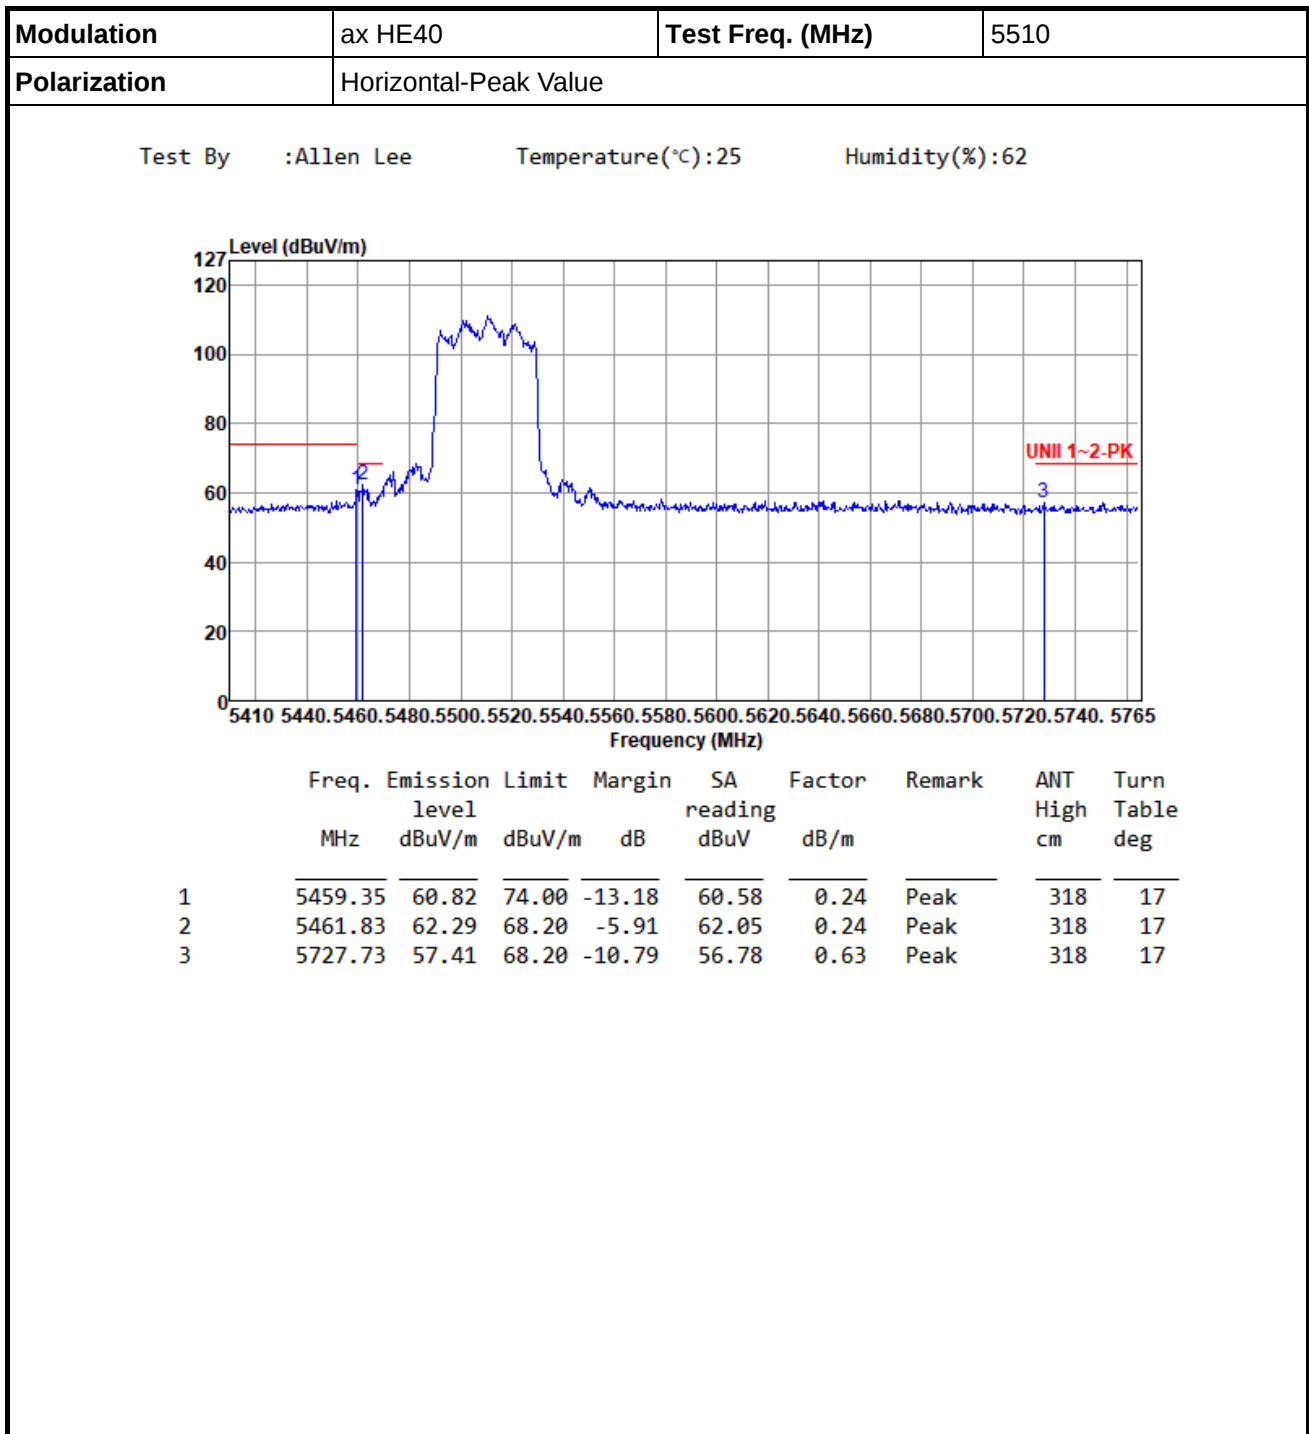


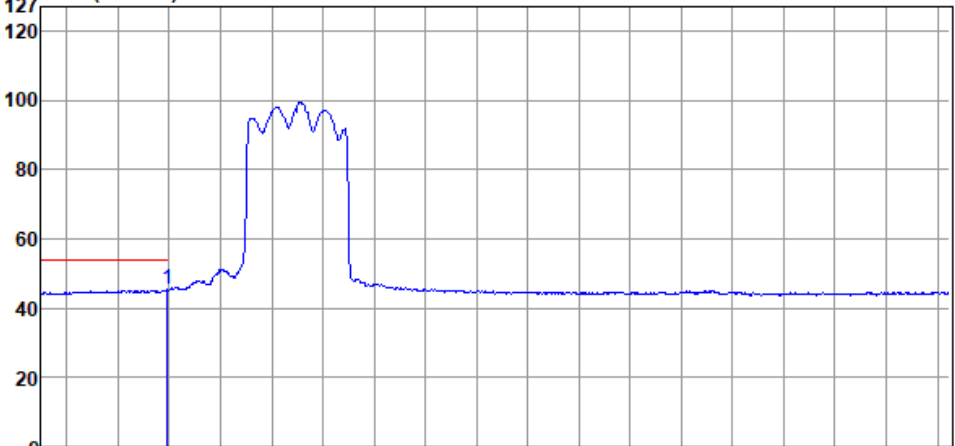



Modulation	ax HE40	Test Freq. (MHz)	5510						
Polarization	Horizontal-Average Value								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62									
Level (dBuV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	level				reading			High	Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5459.35	45.32	54.00	-8.68	45.08	0.24	Average	318	17

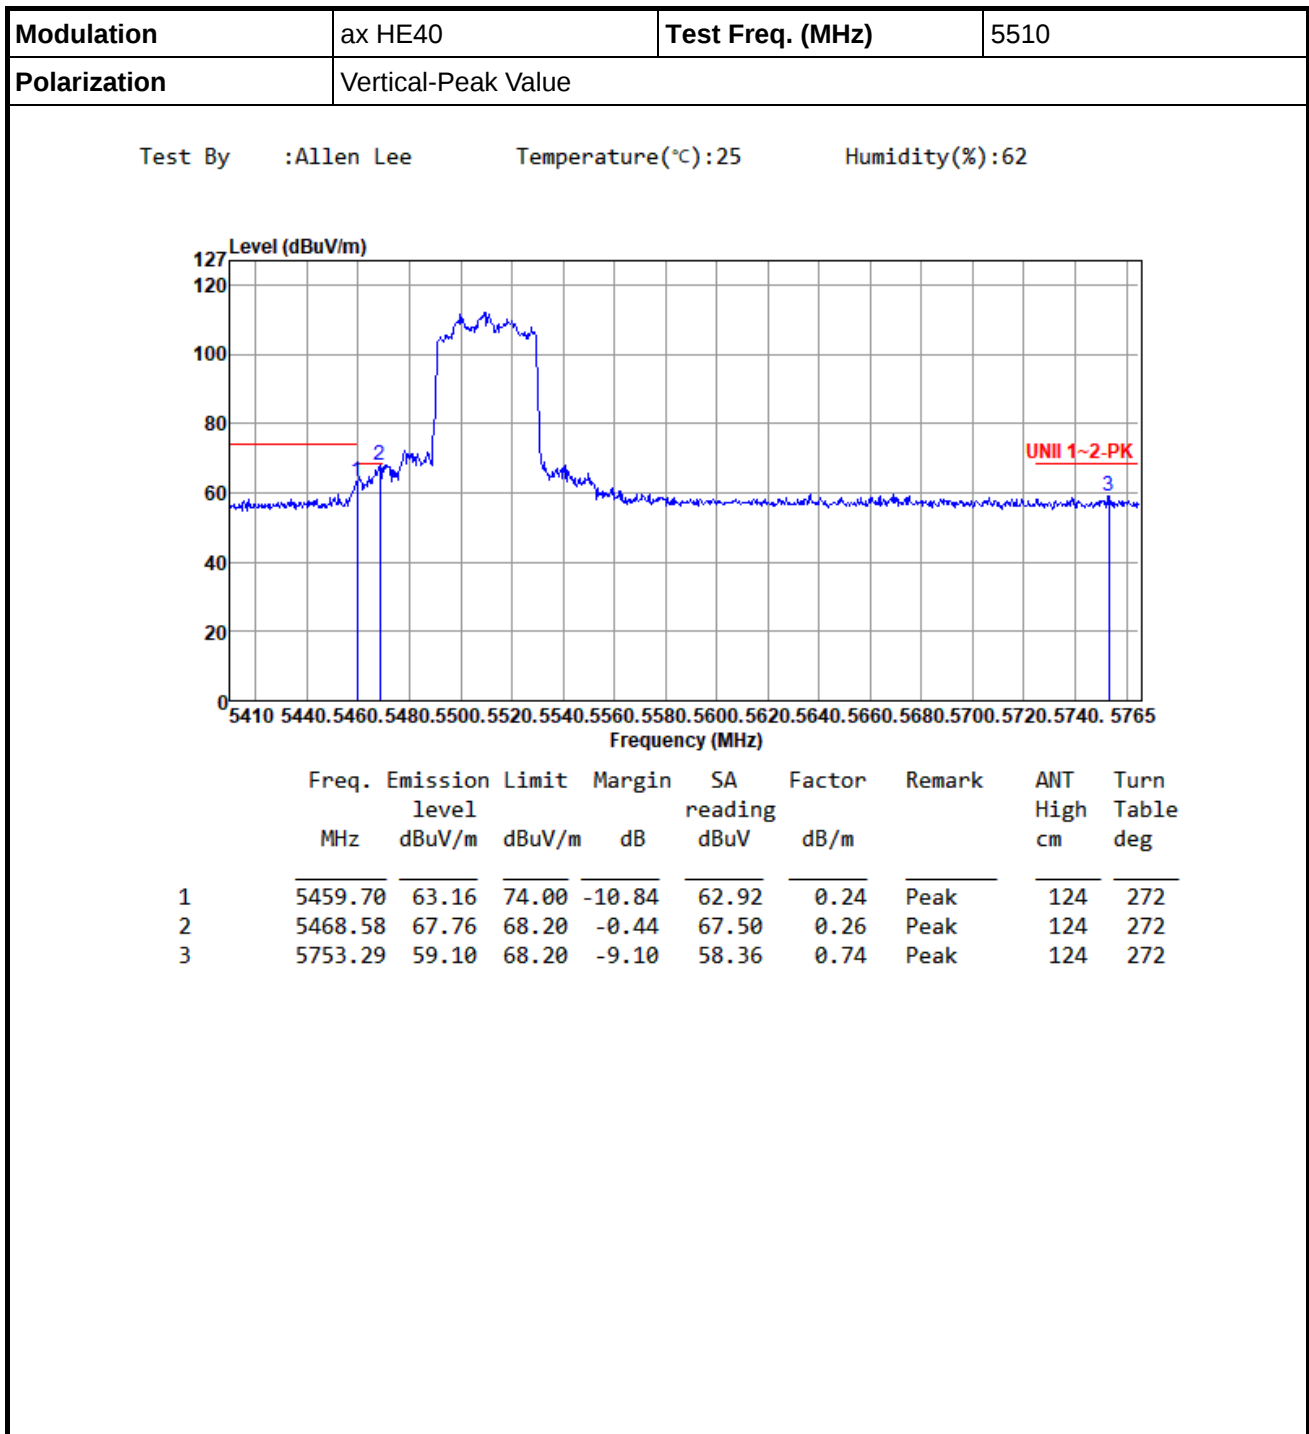


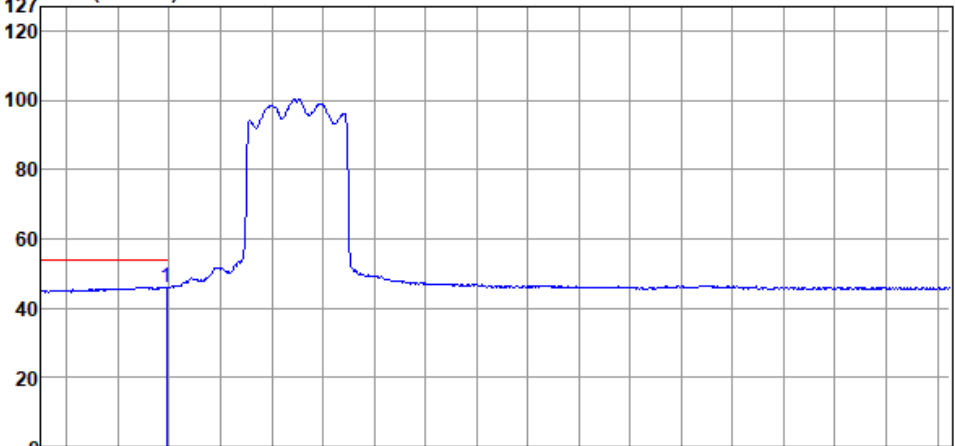


Modulation	ax HE40	Test Freq. (MHz)	5510						
Polarization	Vertical -Average Value								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62									
Level (dBuV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	level				reading			High	Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5458.99	46.10	54.00	-7.90	45.86	0.24	Average	124	272

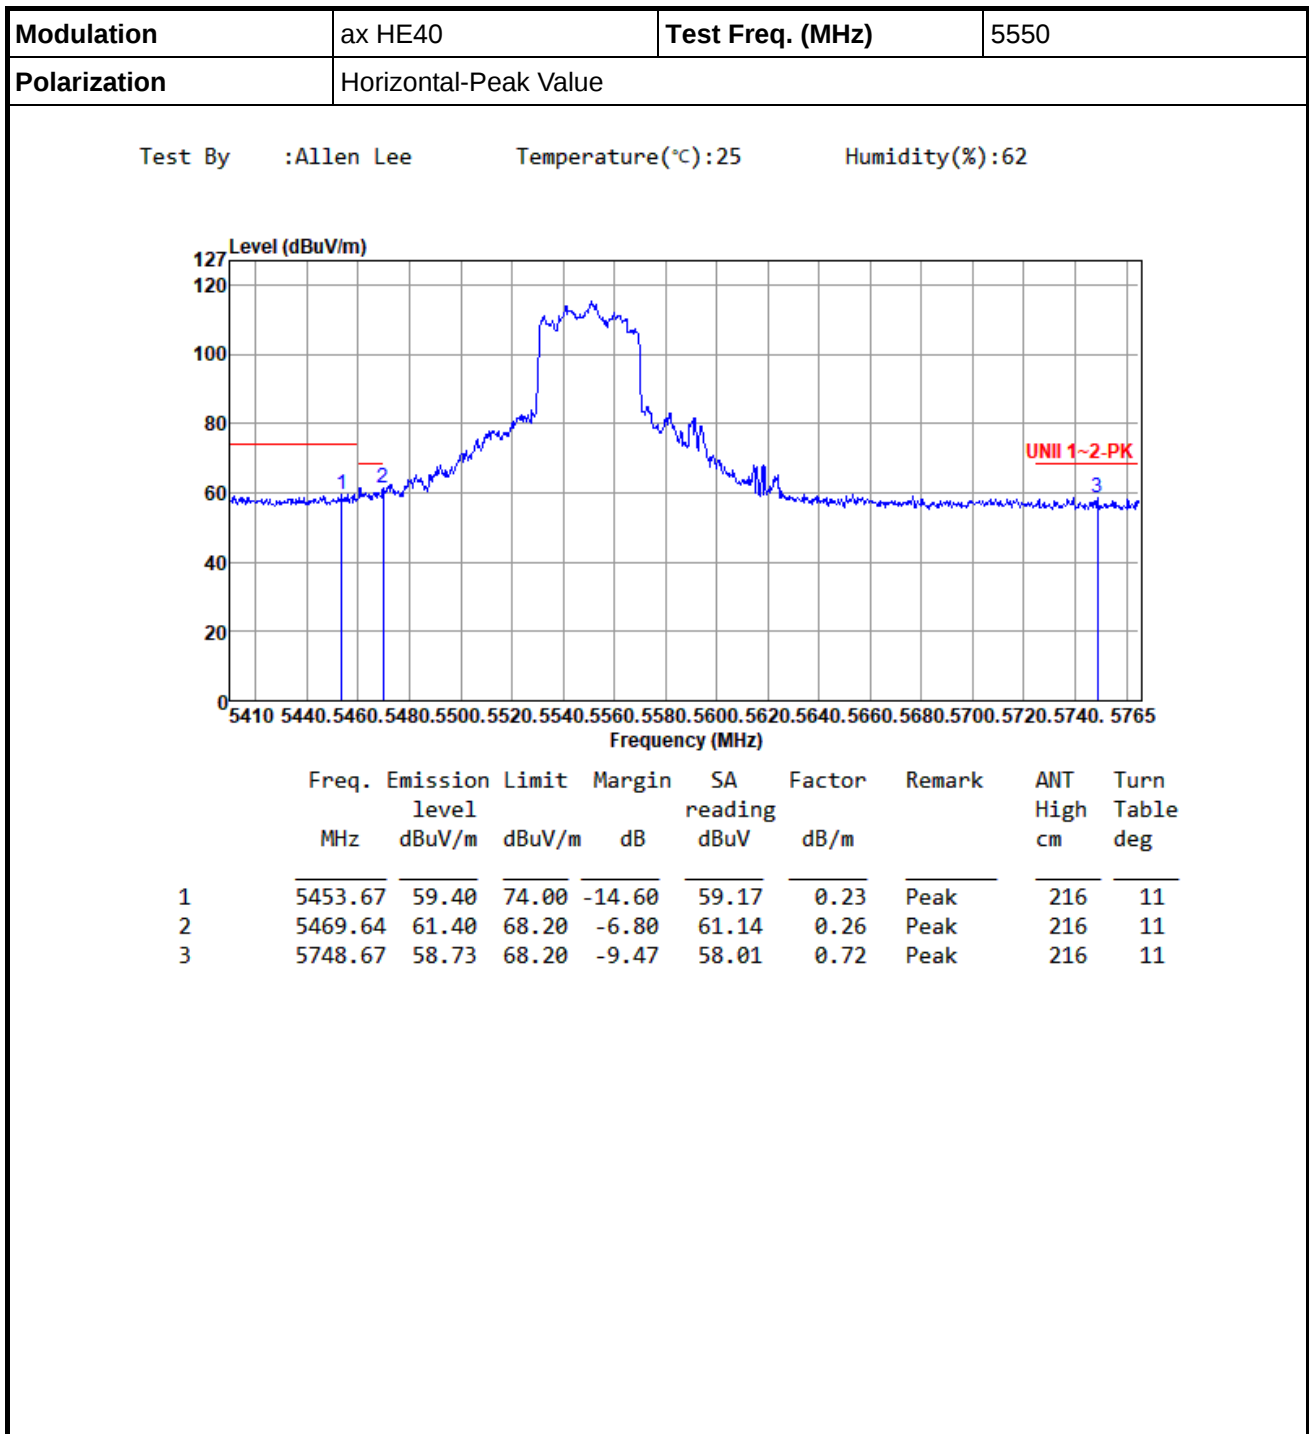


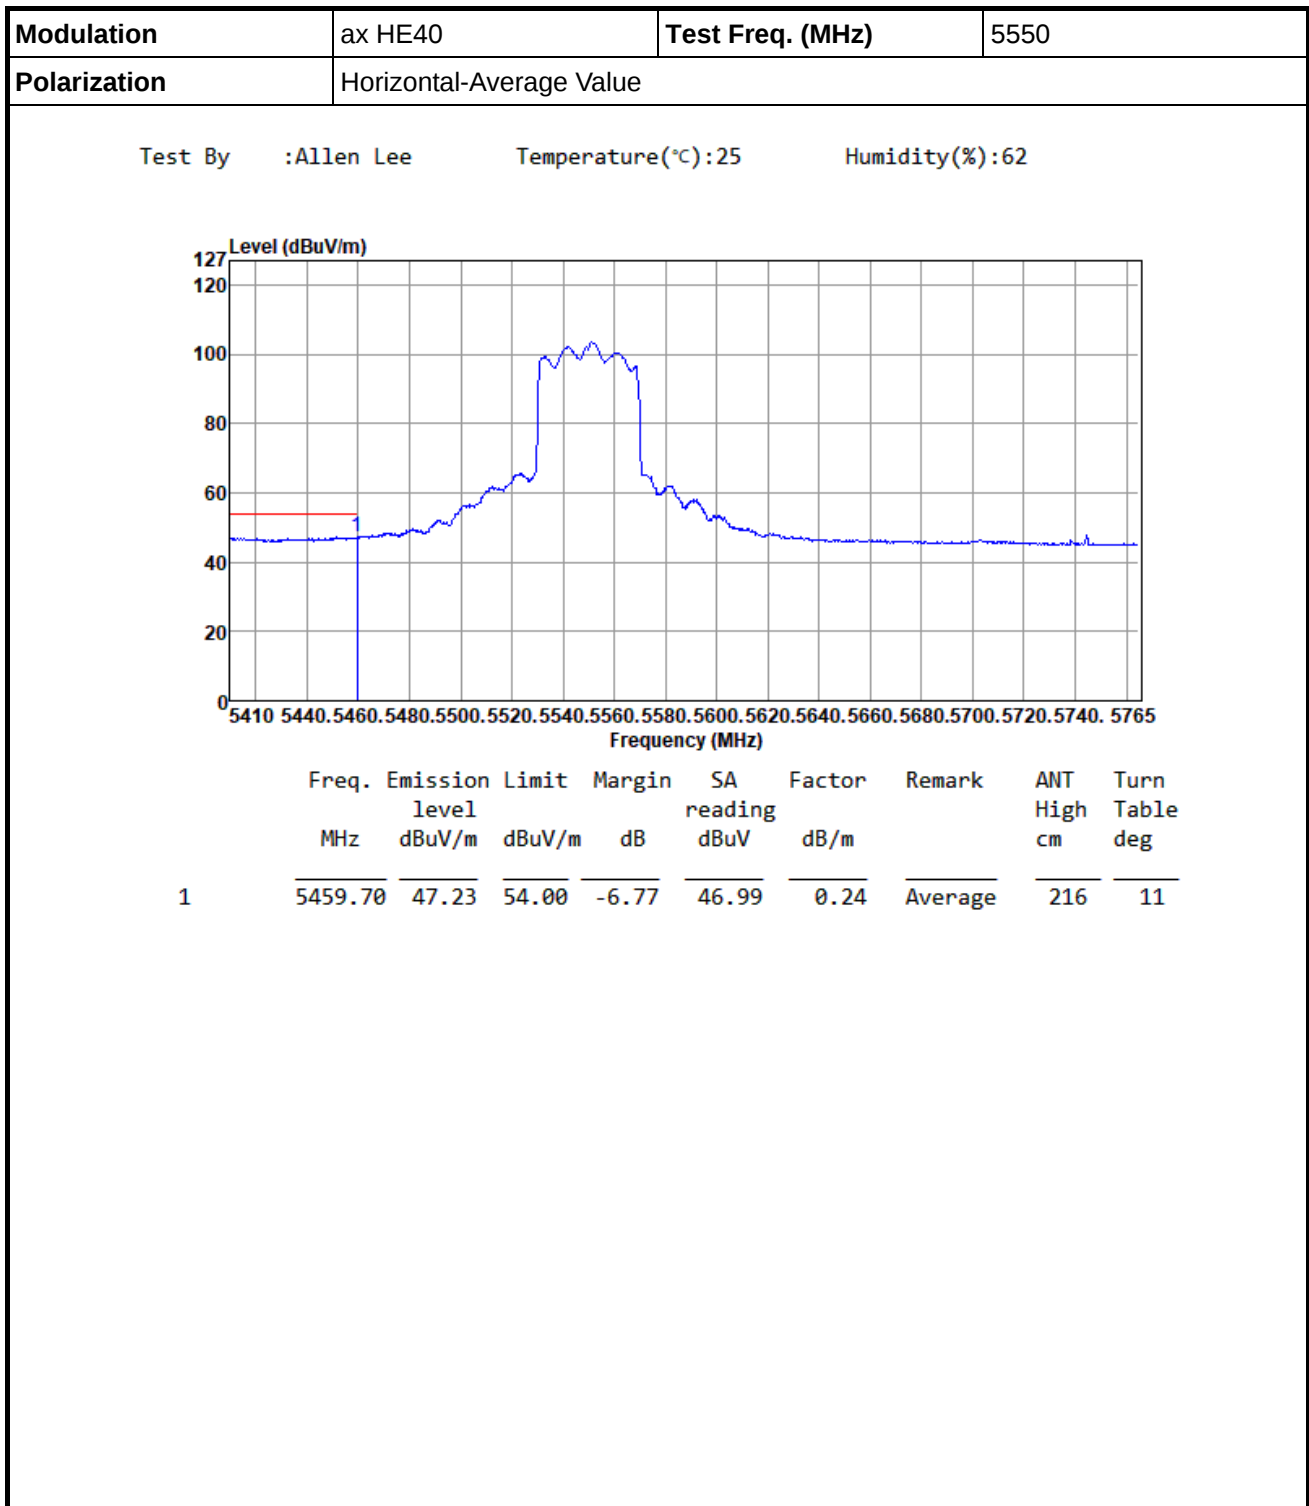


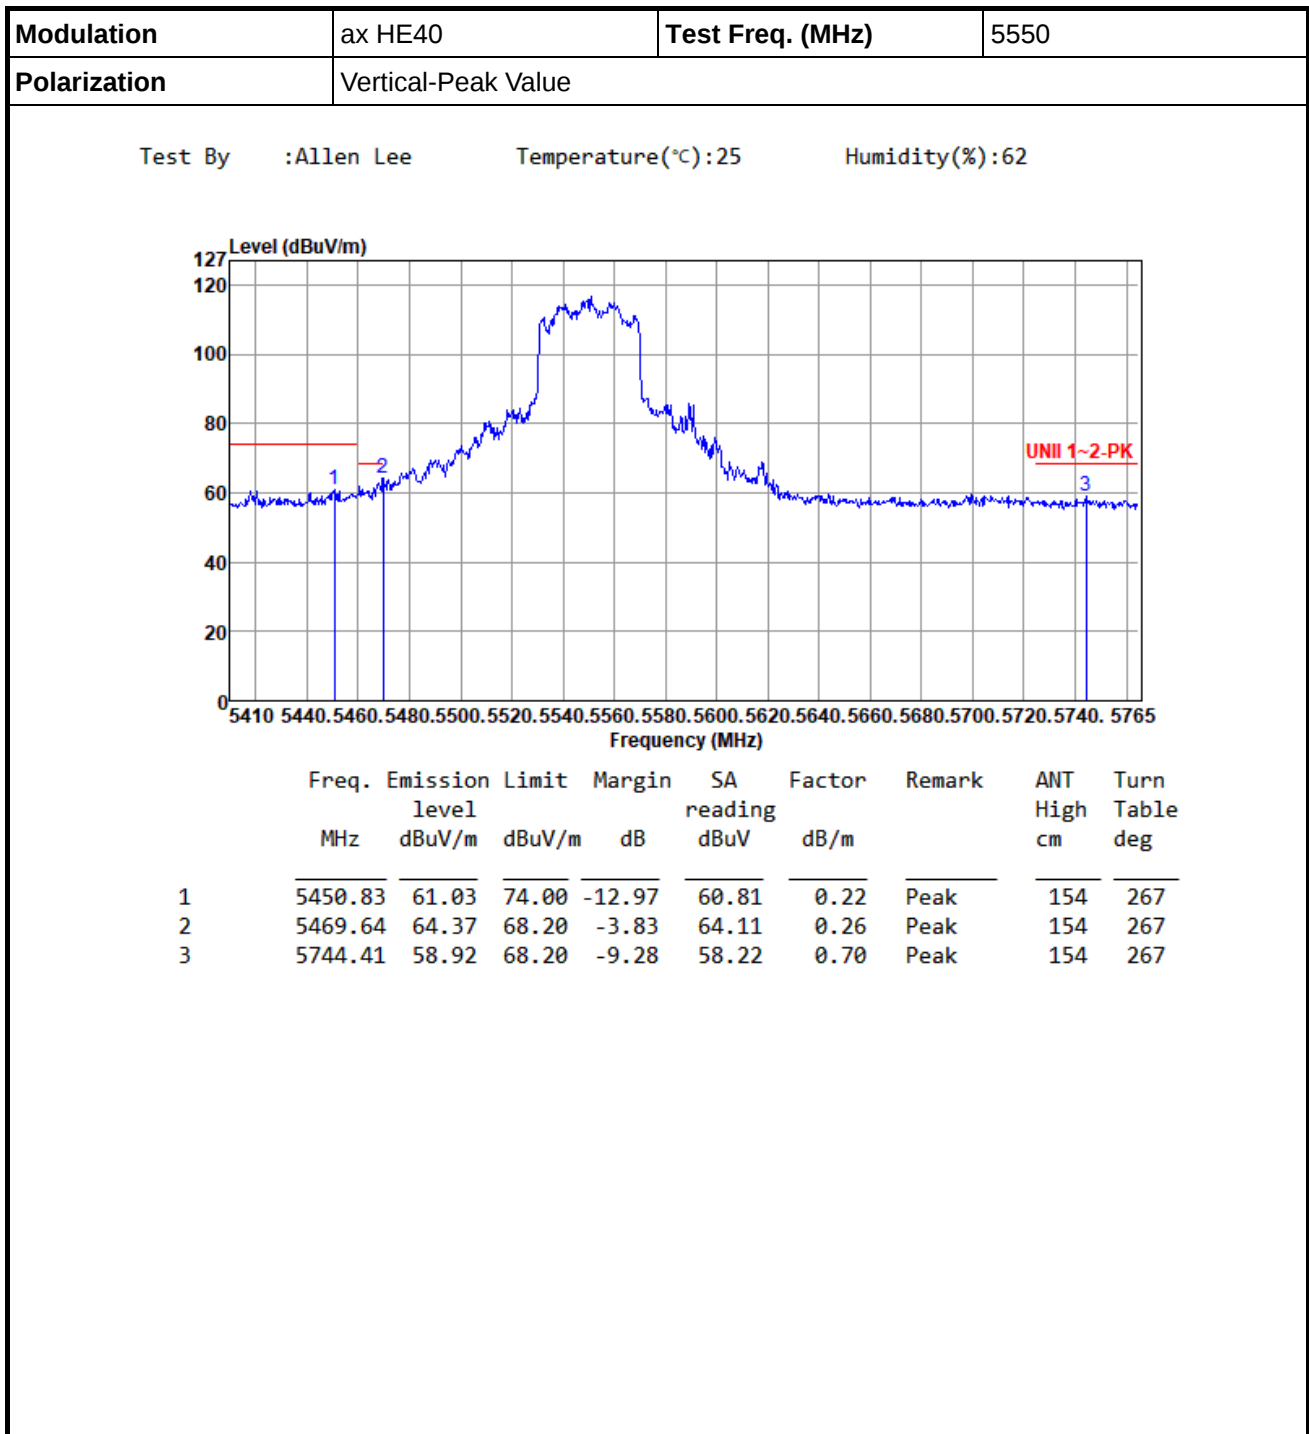


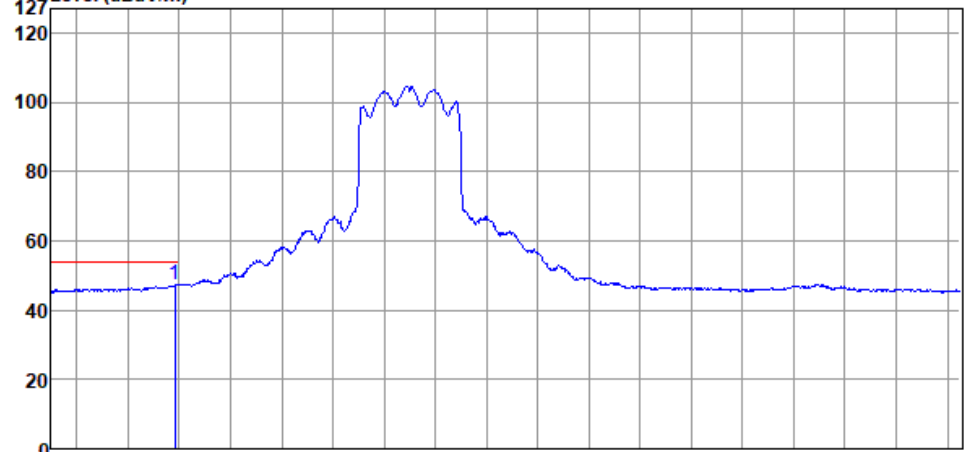



Modulation	ax HE40	Test Freq. (MHz)	5550						
Polarization	Vertical -Average Value								
Test By :Allen Lee Temperature(°C):25 Humidity(%):62									
Level (dBuV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5458.28	47.33	54.00	-6.67	47.08	0.25	Average	154	267

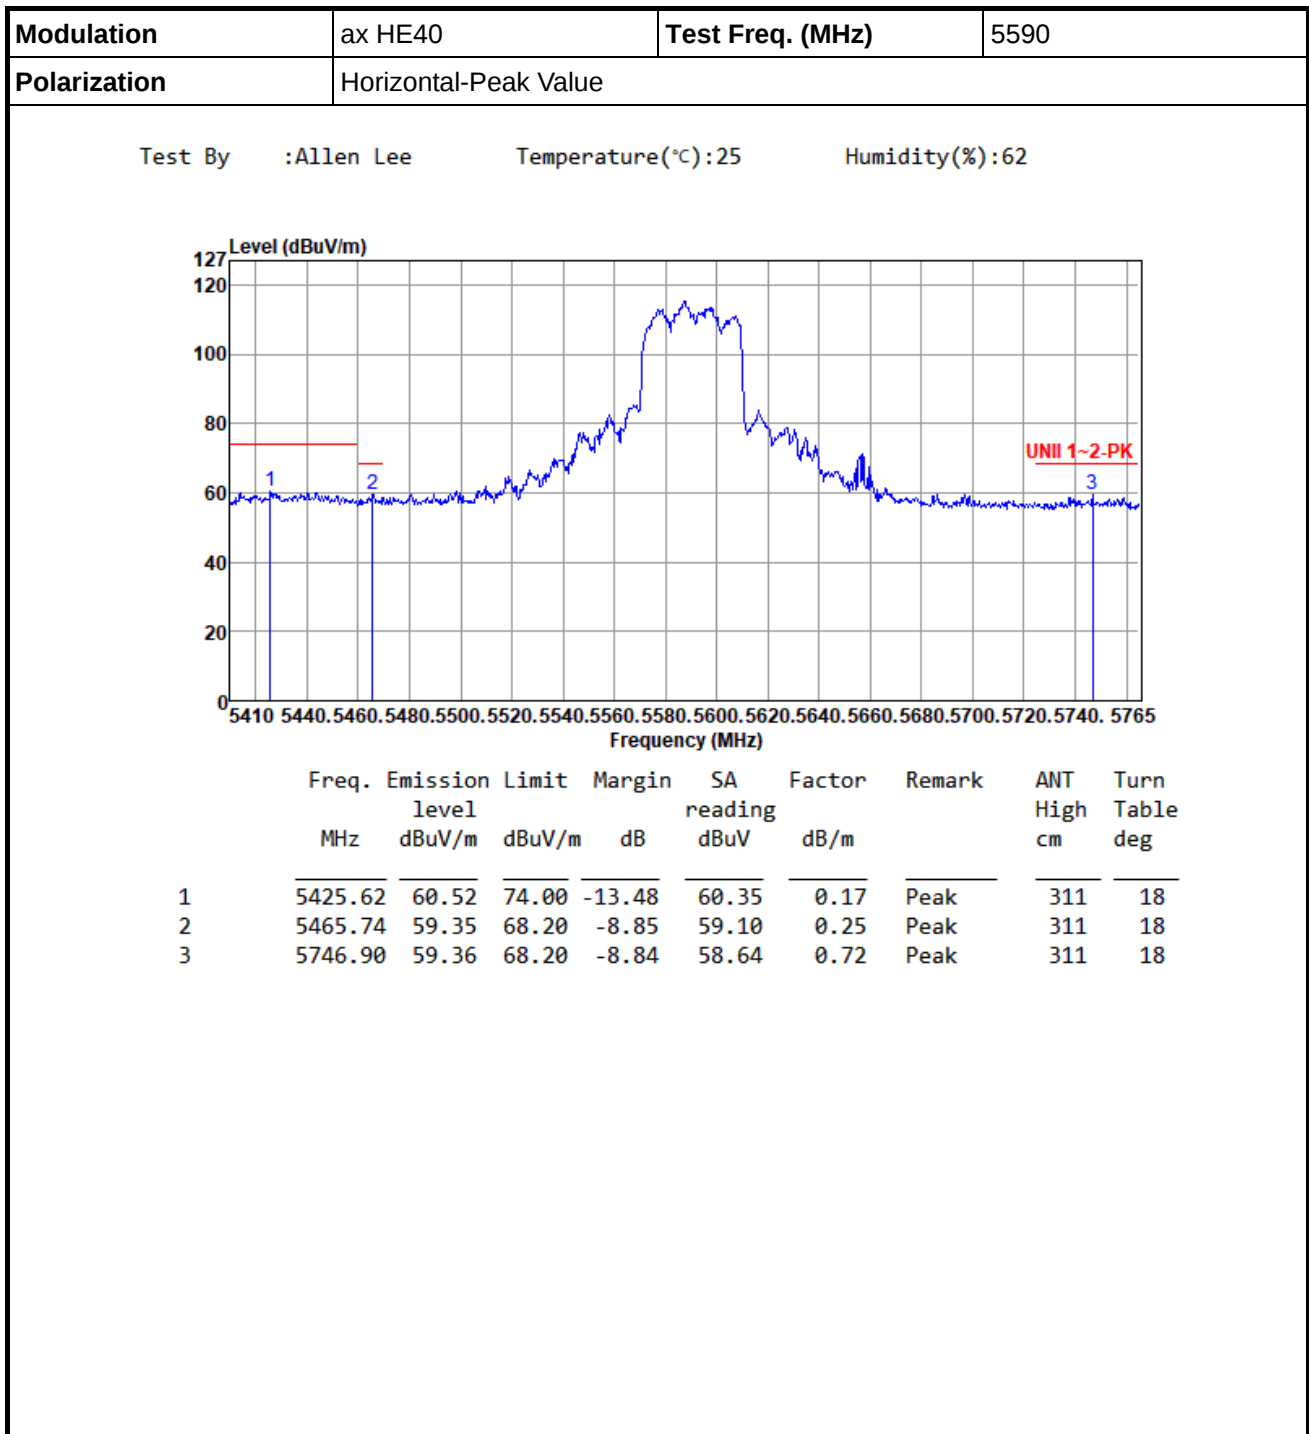


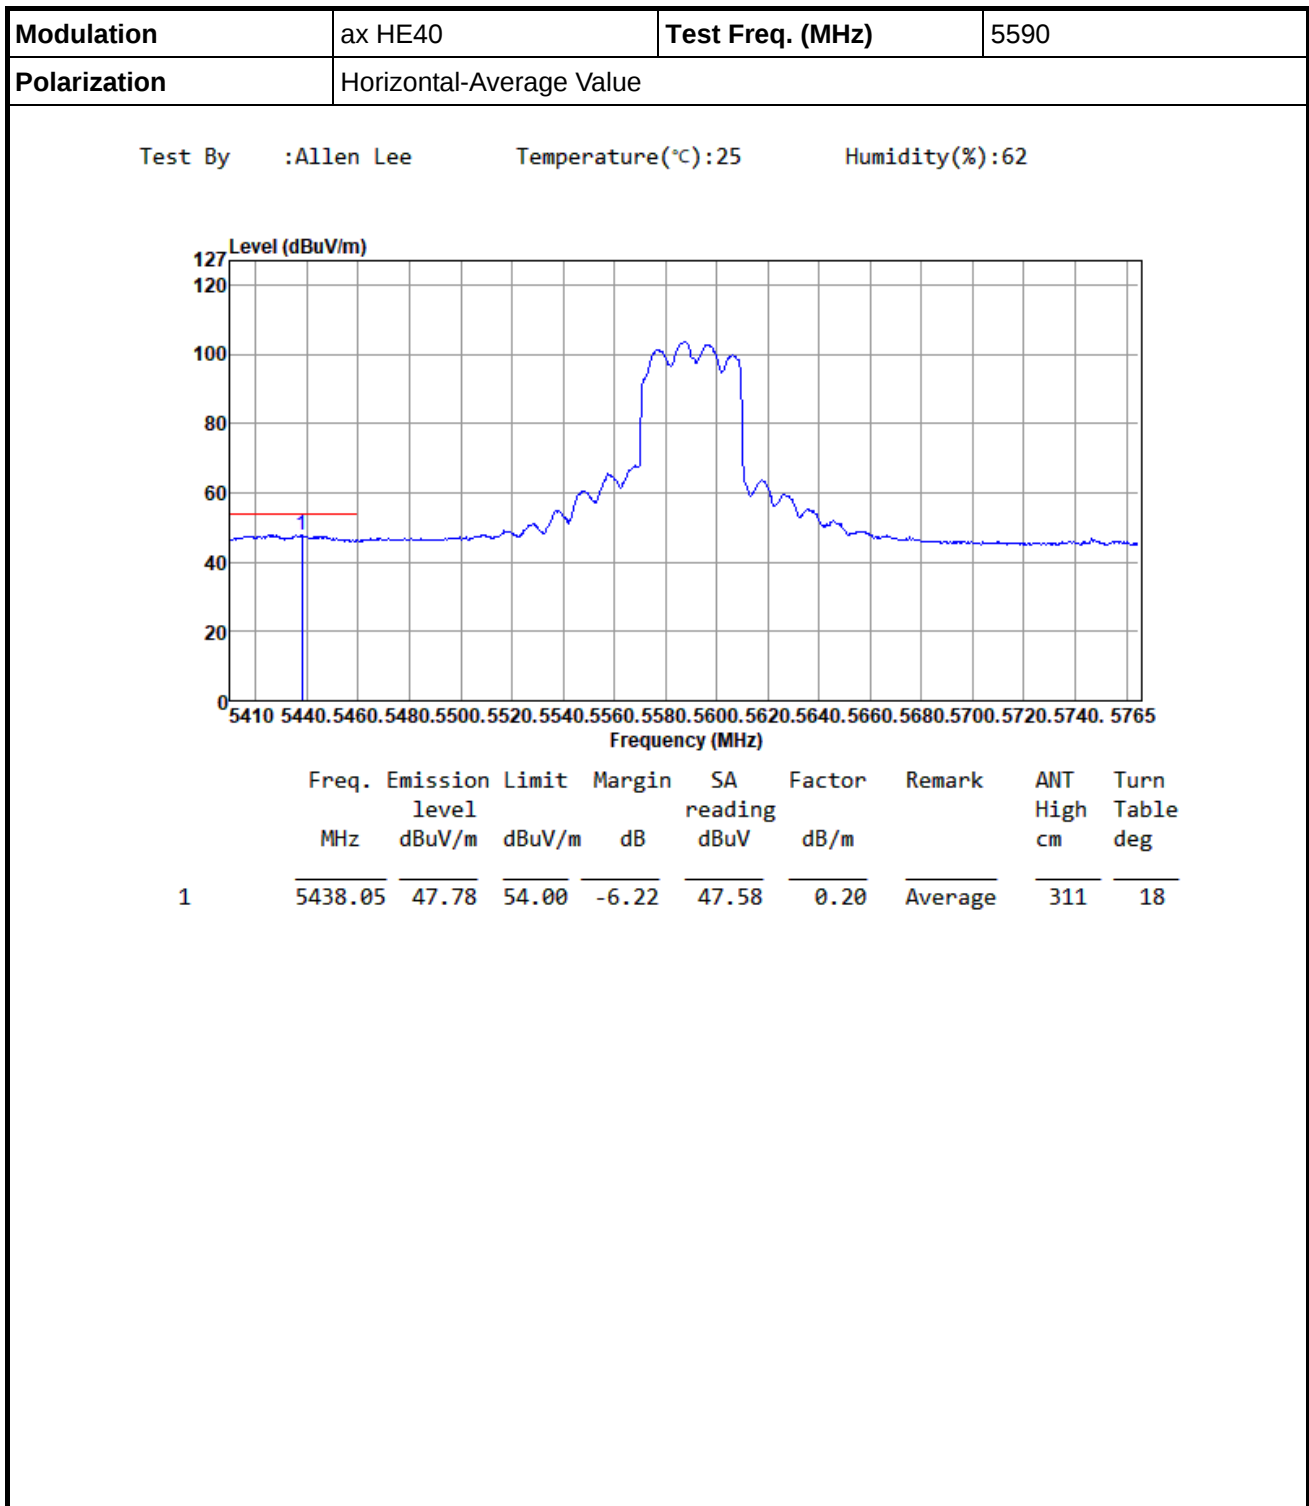


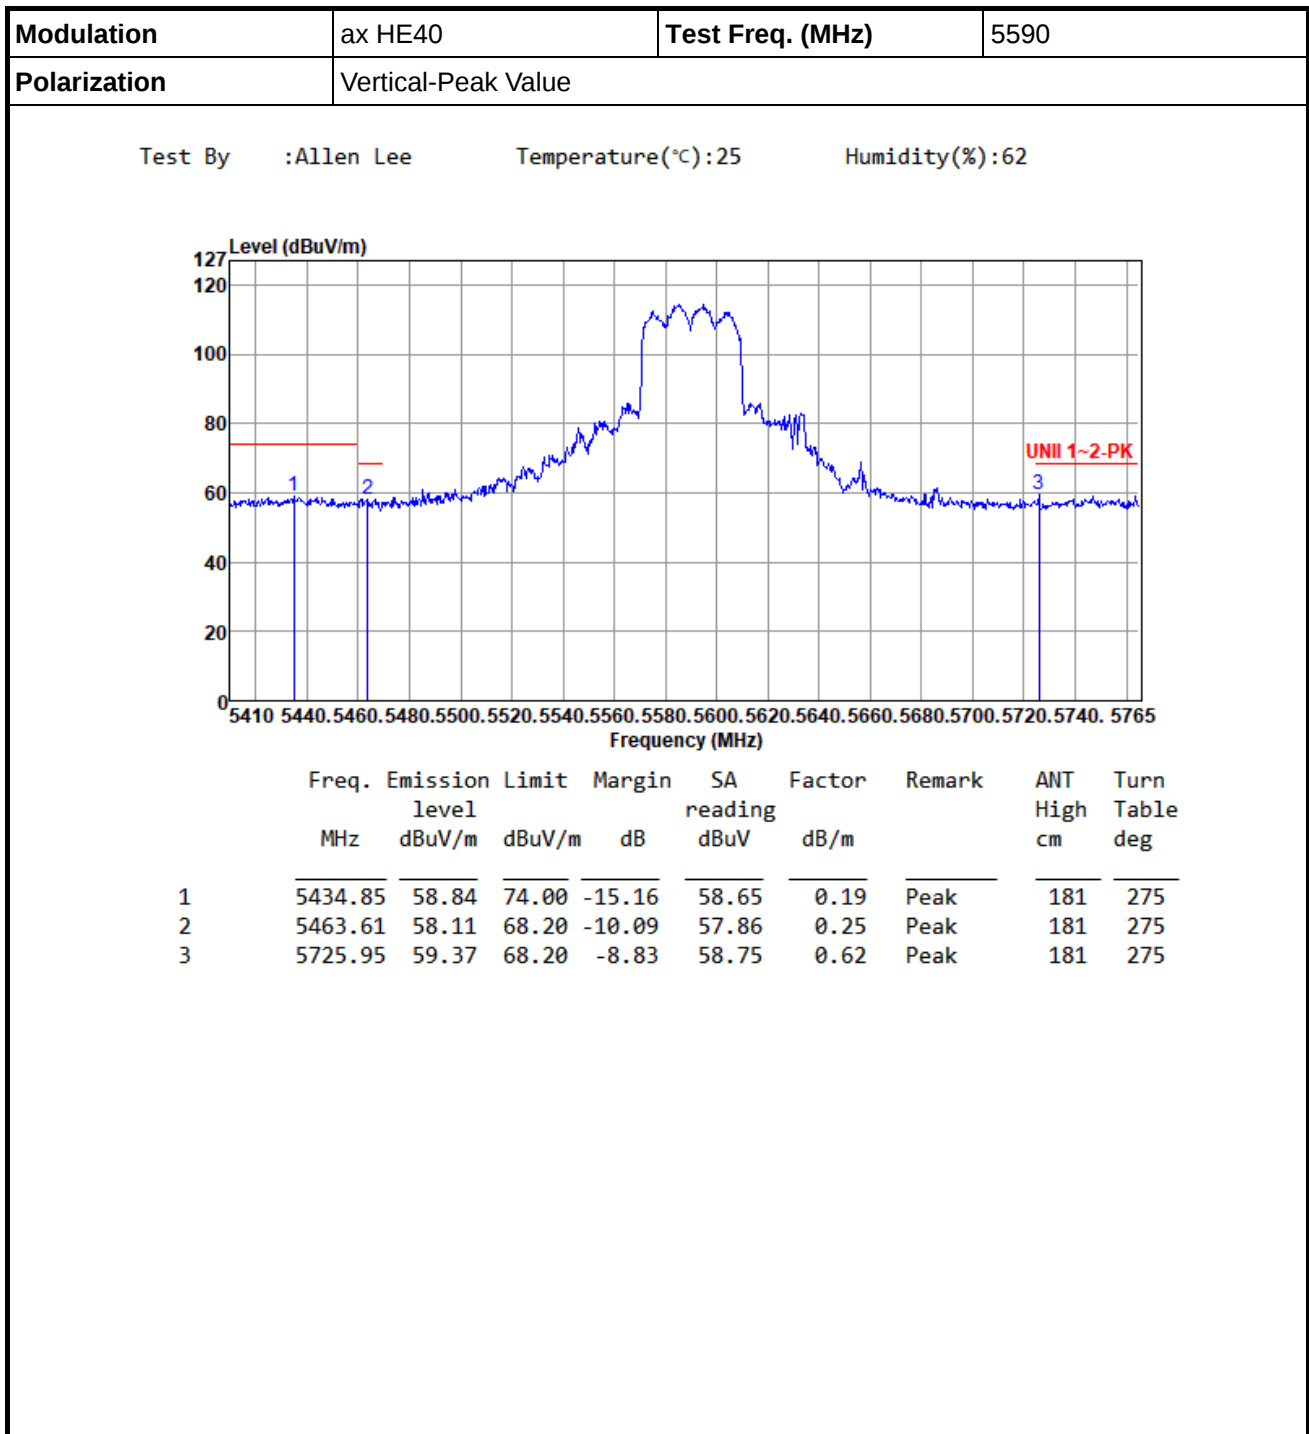


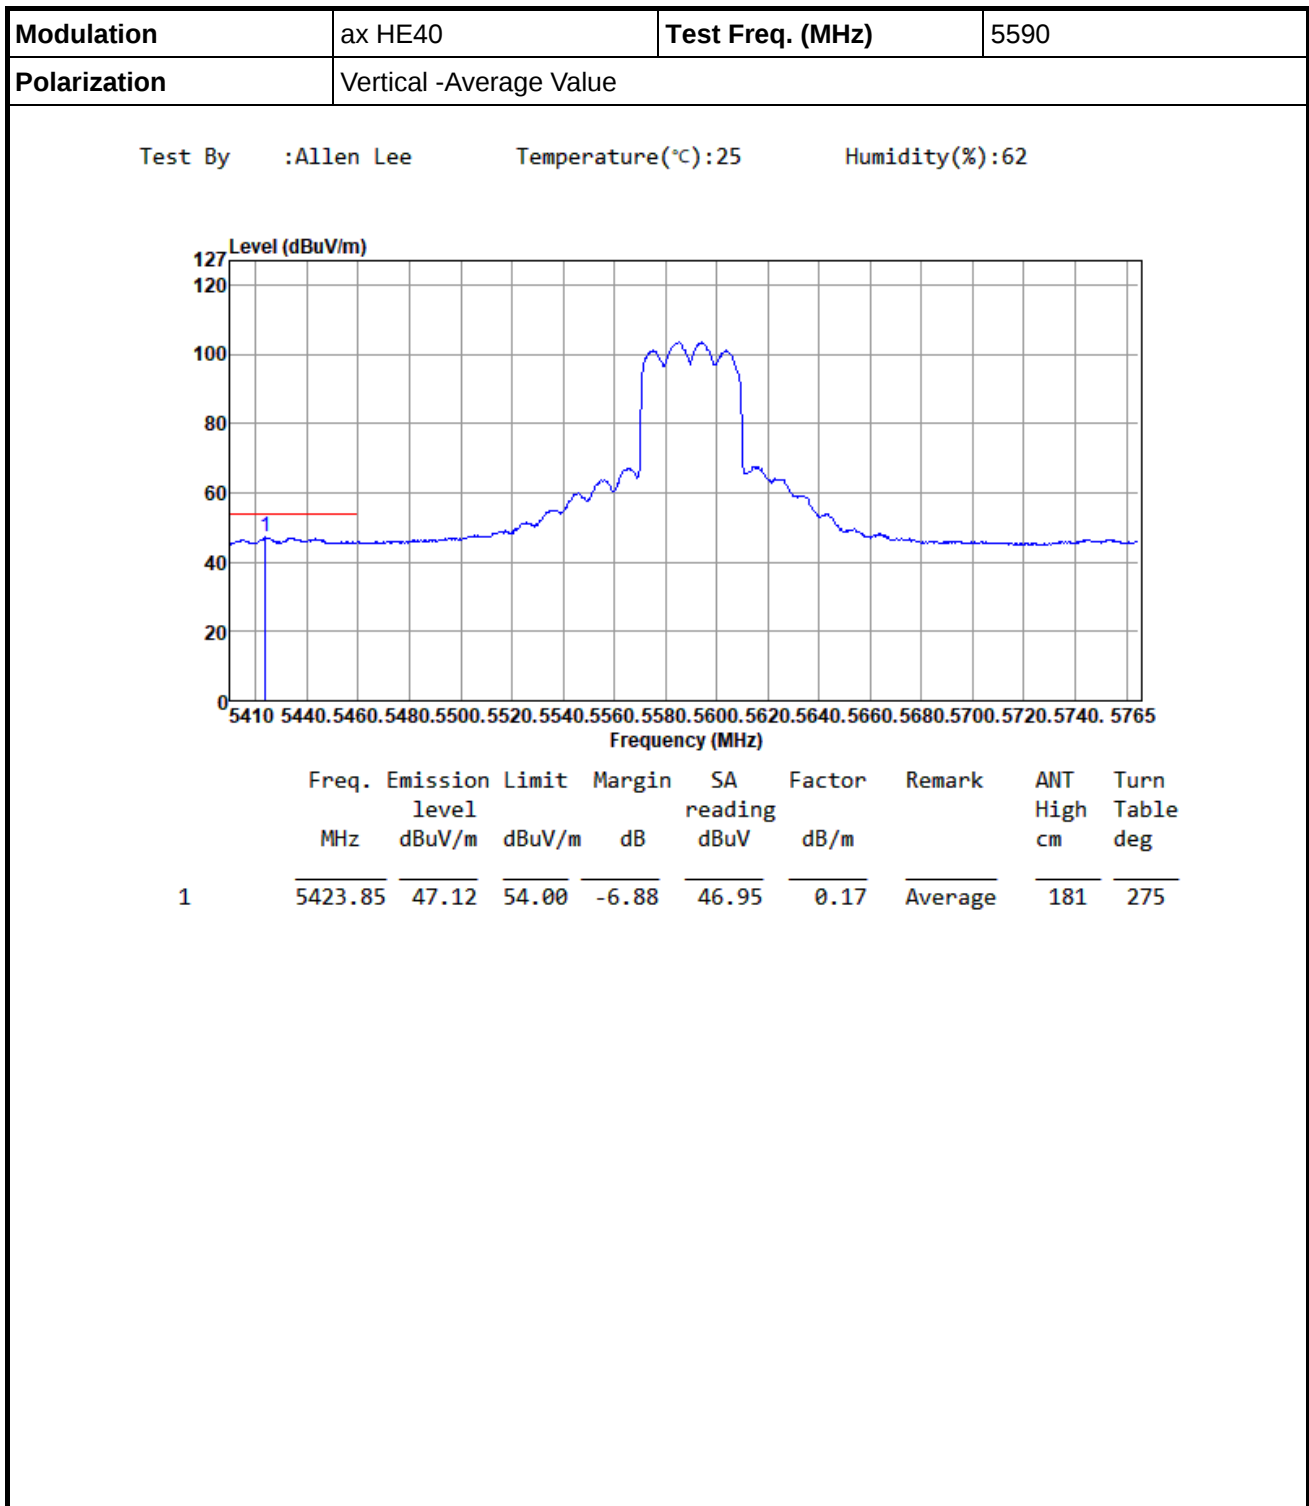


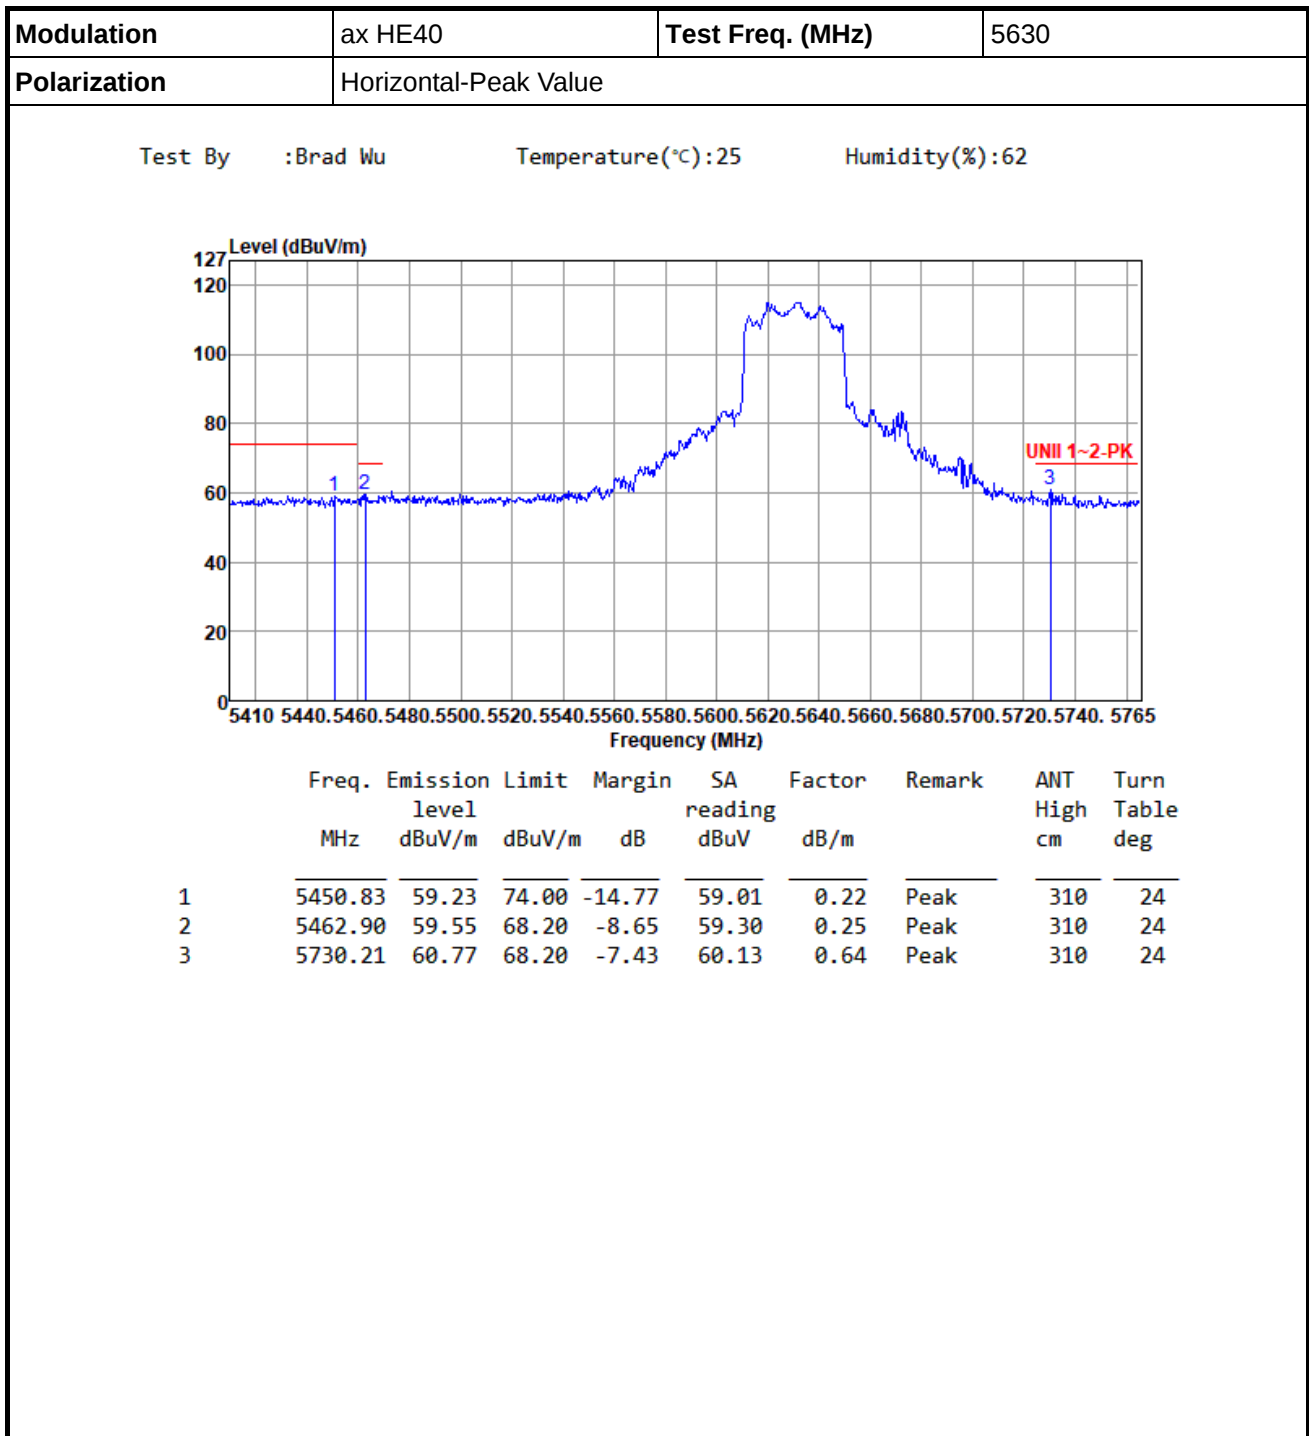


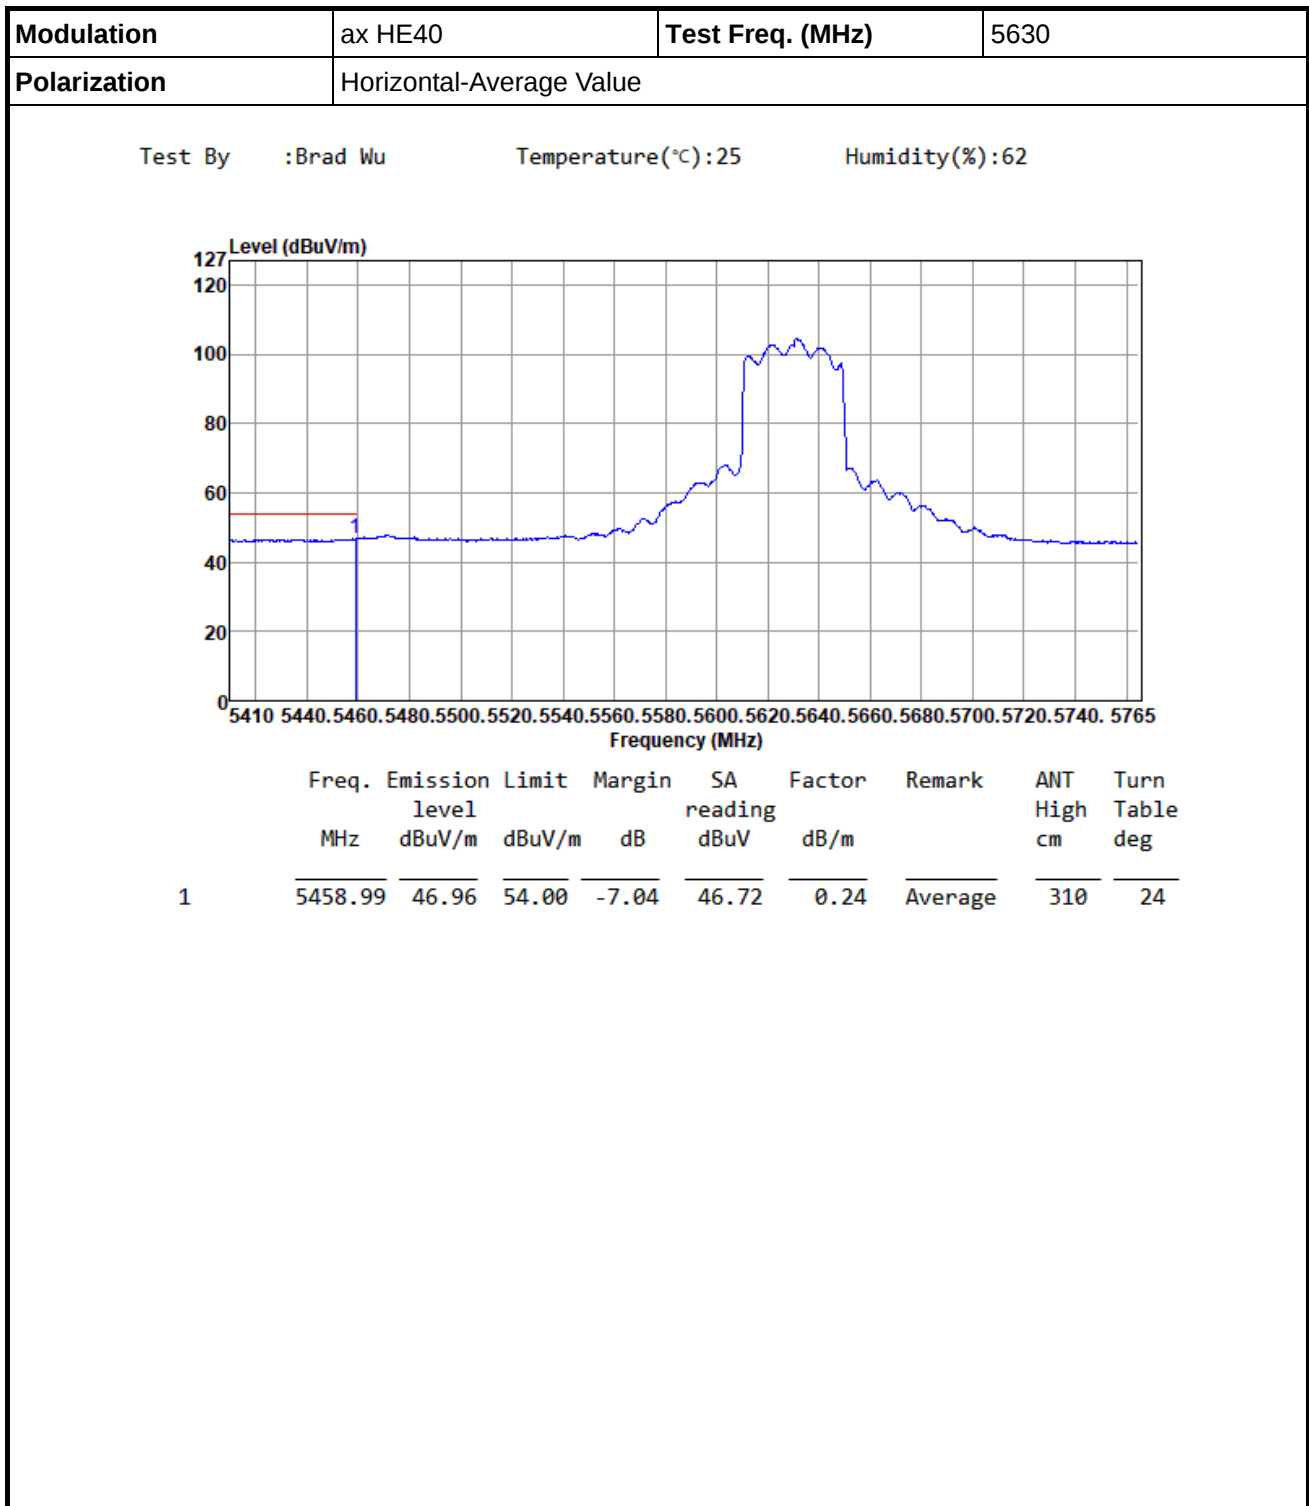


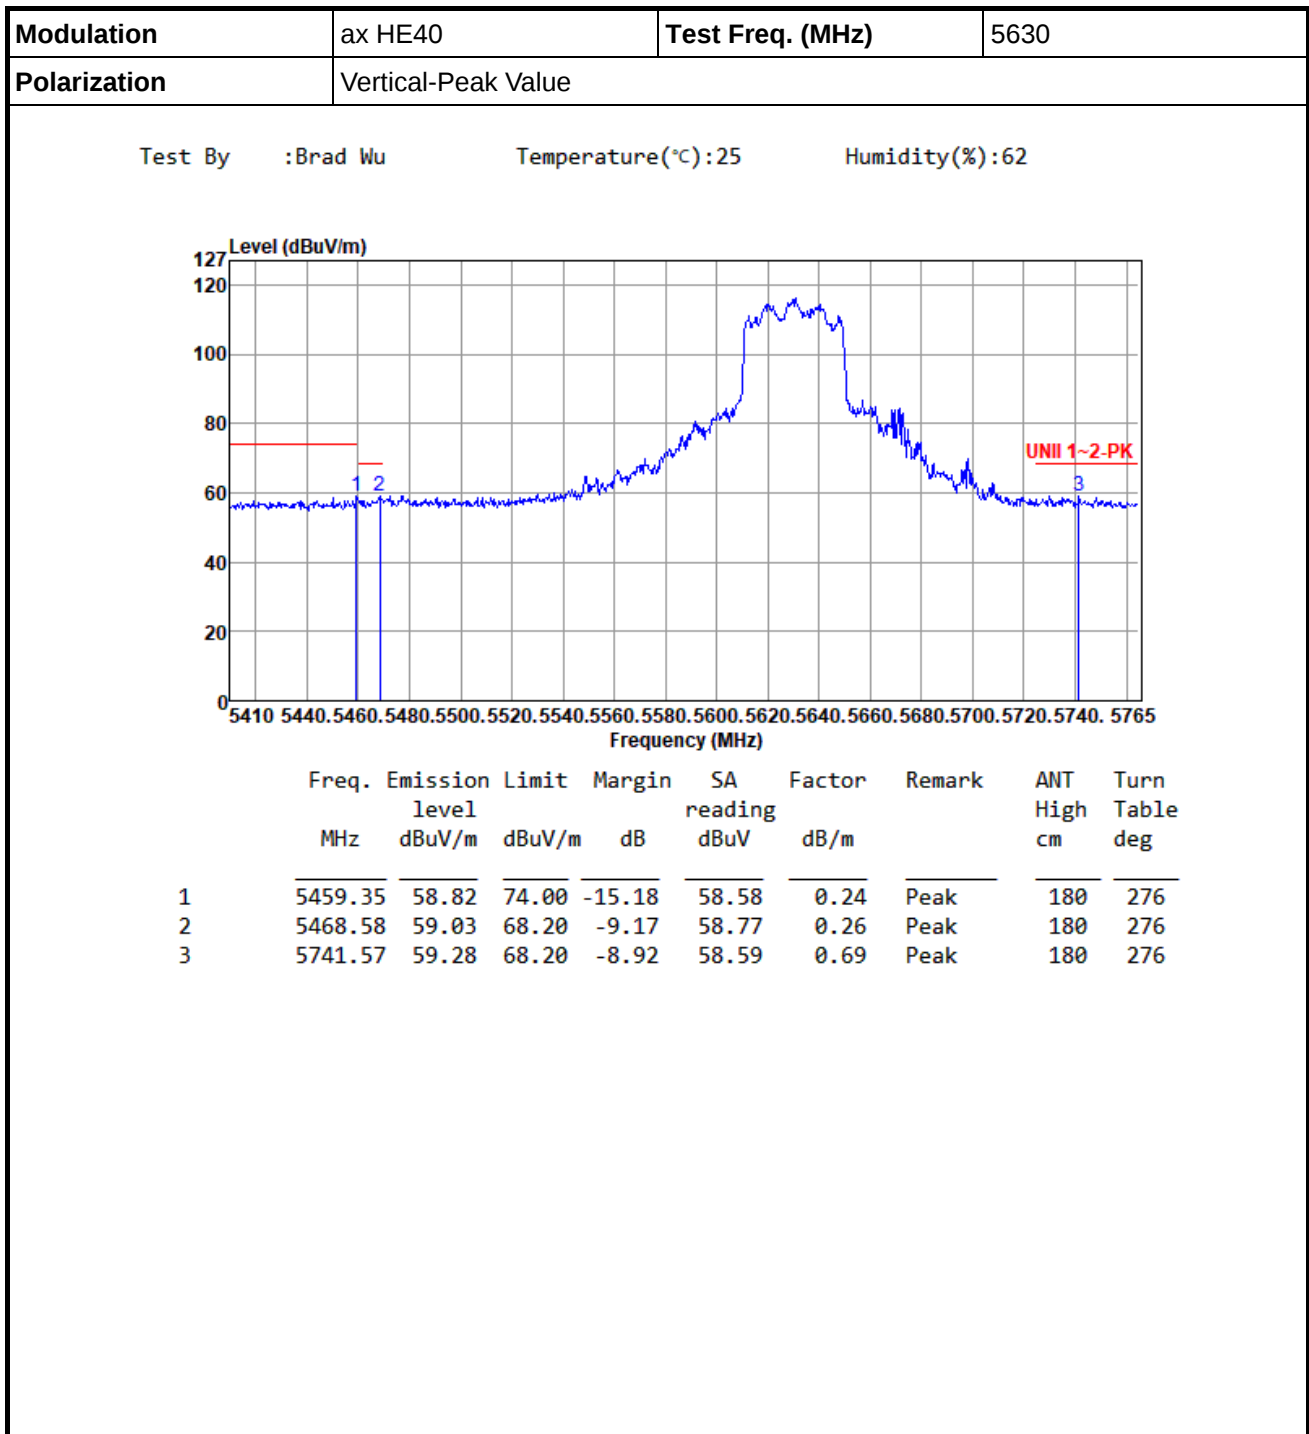

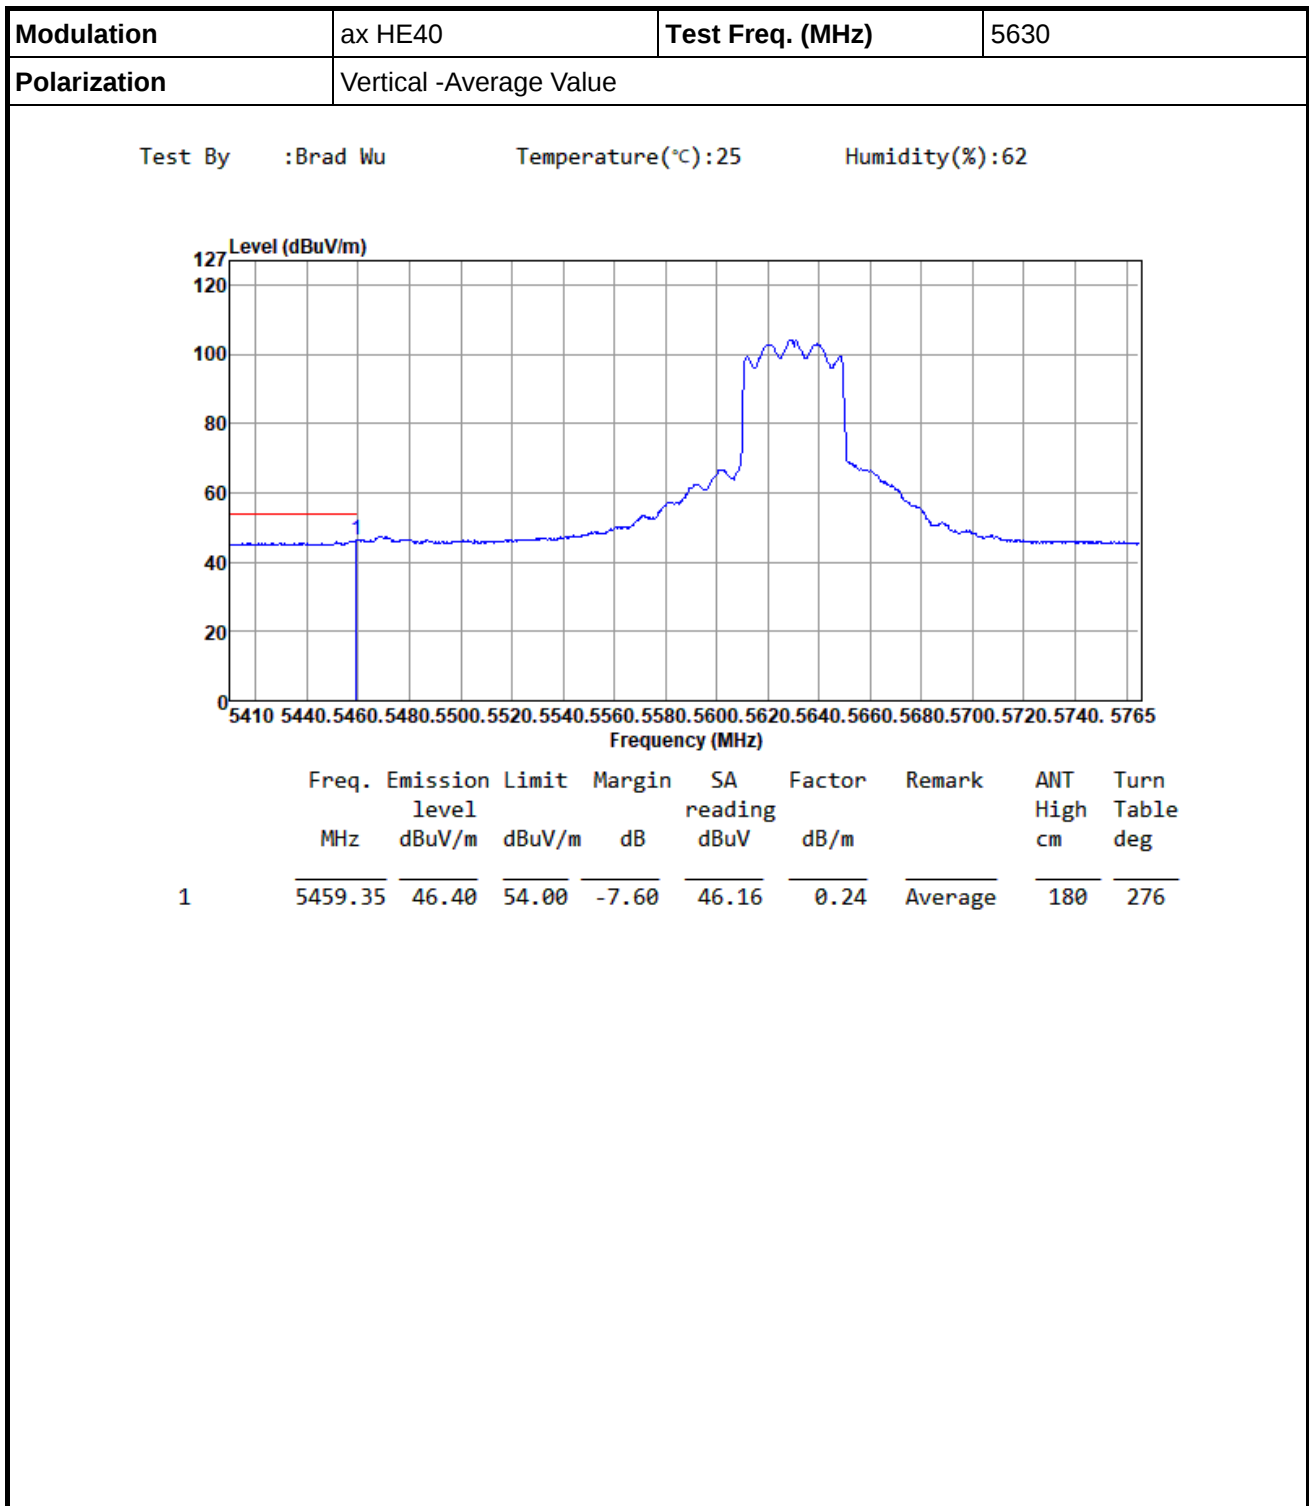

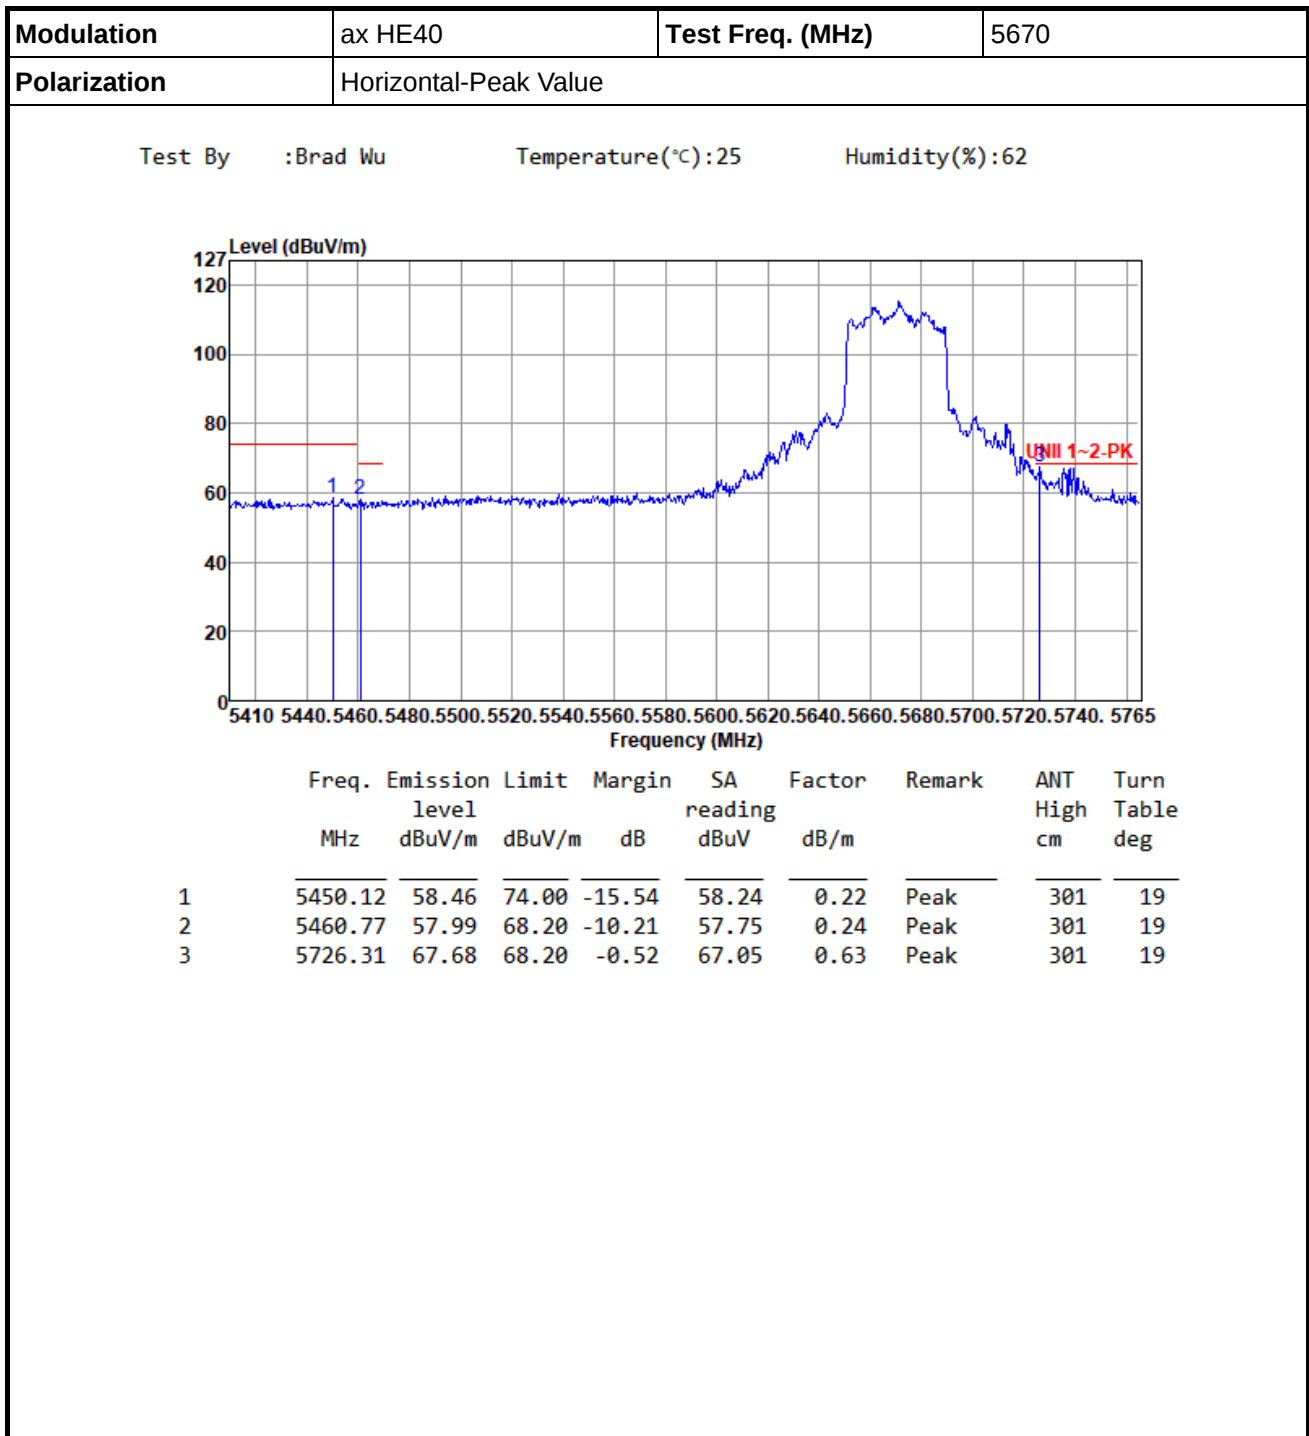

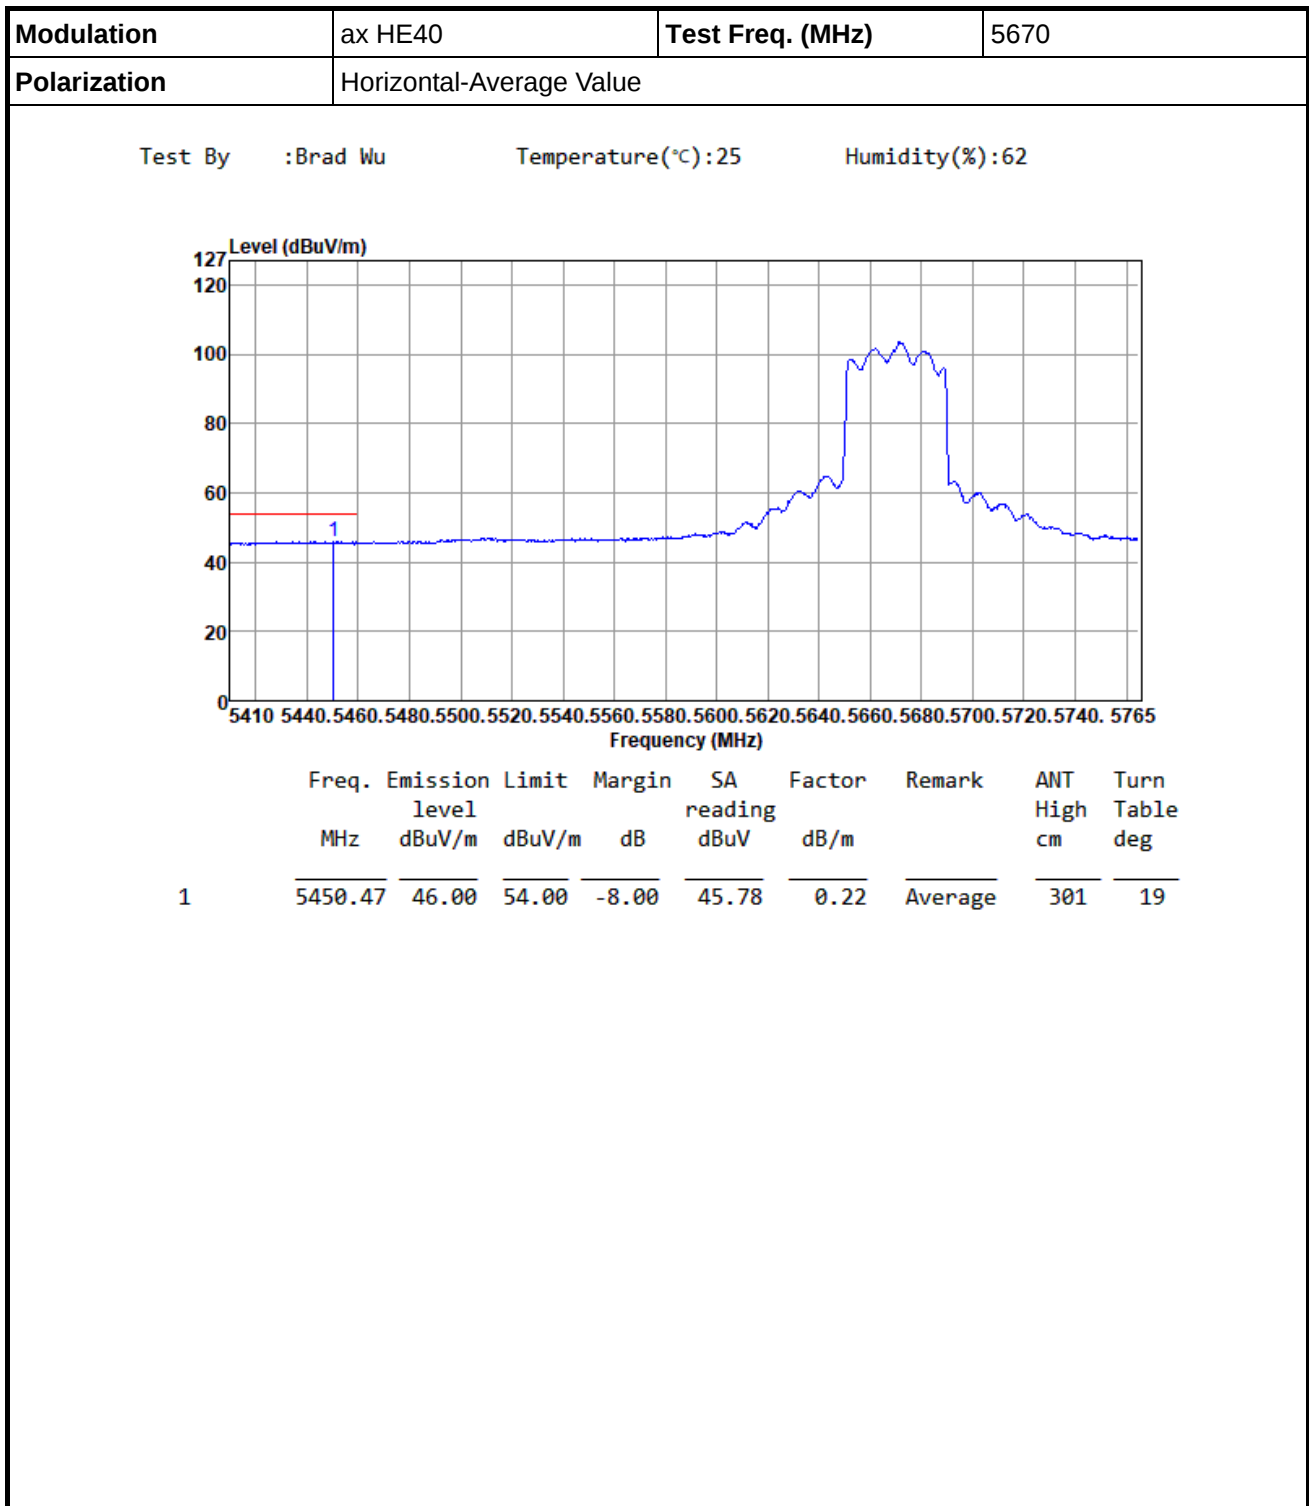


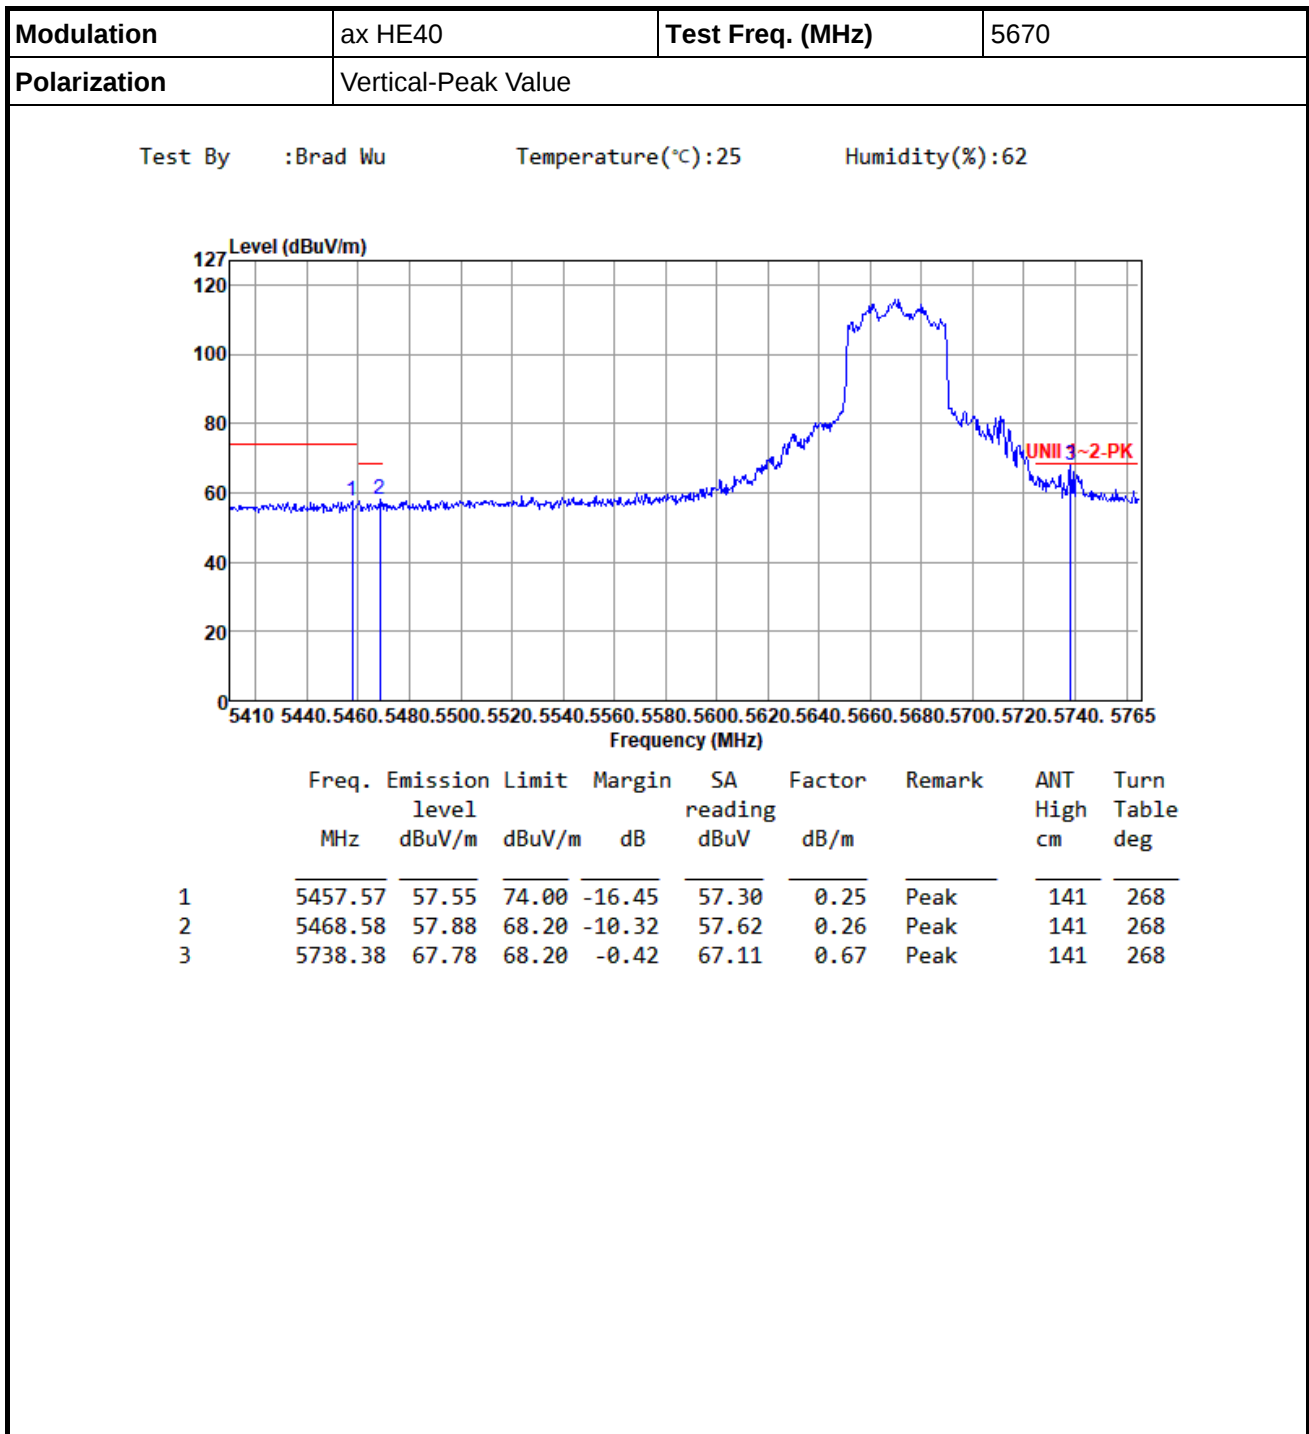






Band Edge measurement


Appendix D.3

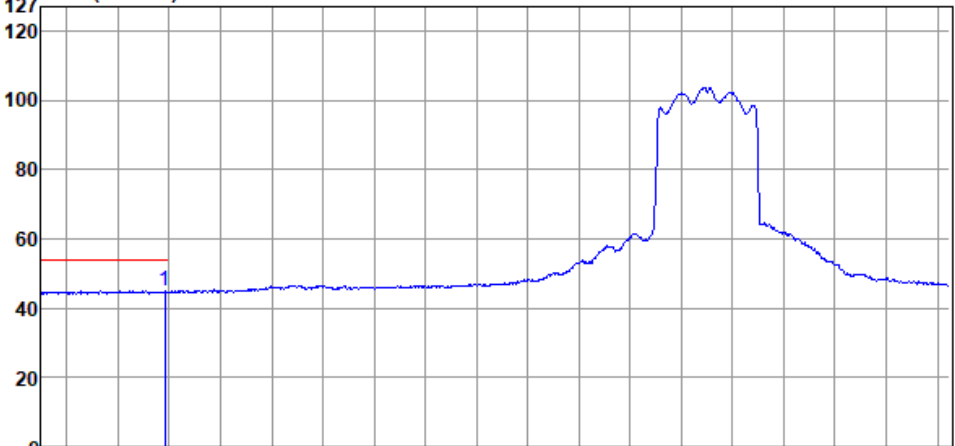
Modulation	ax HE40	Test Freq. (MHz)	5670						
Polarization	Vertical -Average Value								
Test By :Brad Wu Temperature(°C):25 Humidity(%):62									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5458.28	44.85	54.00	-9.15	44.60	0.25	Average	141	268

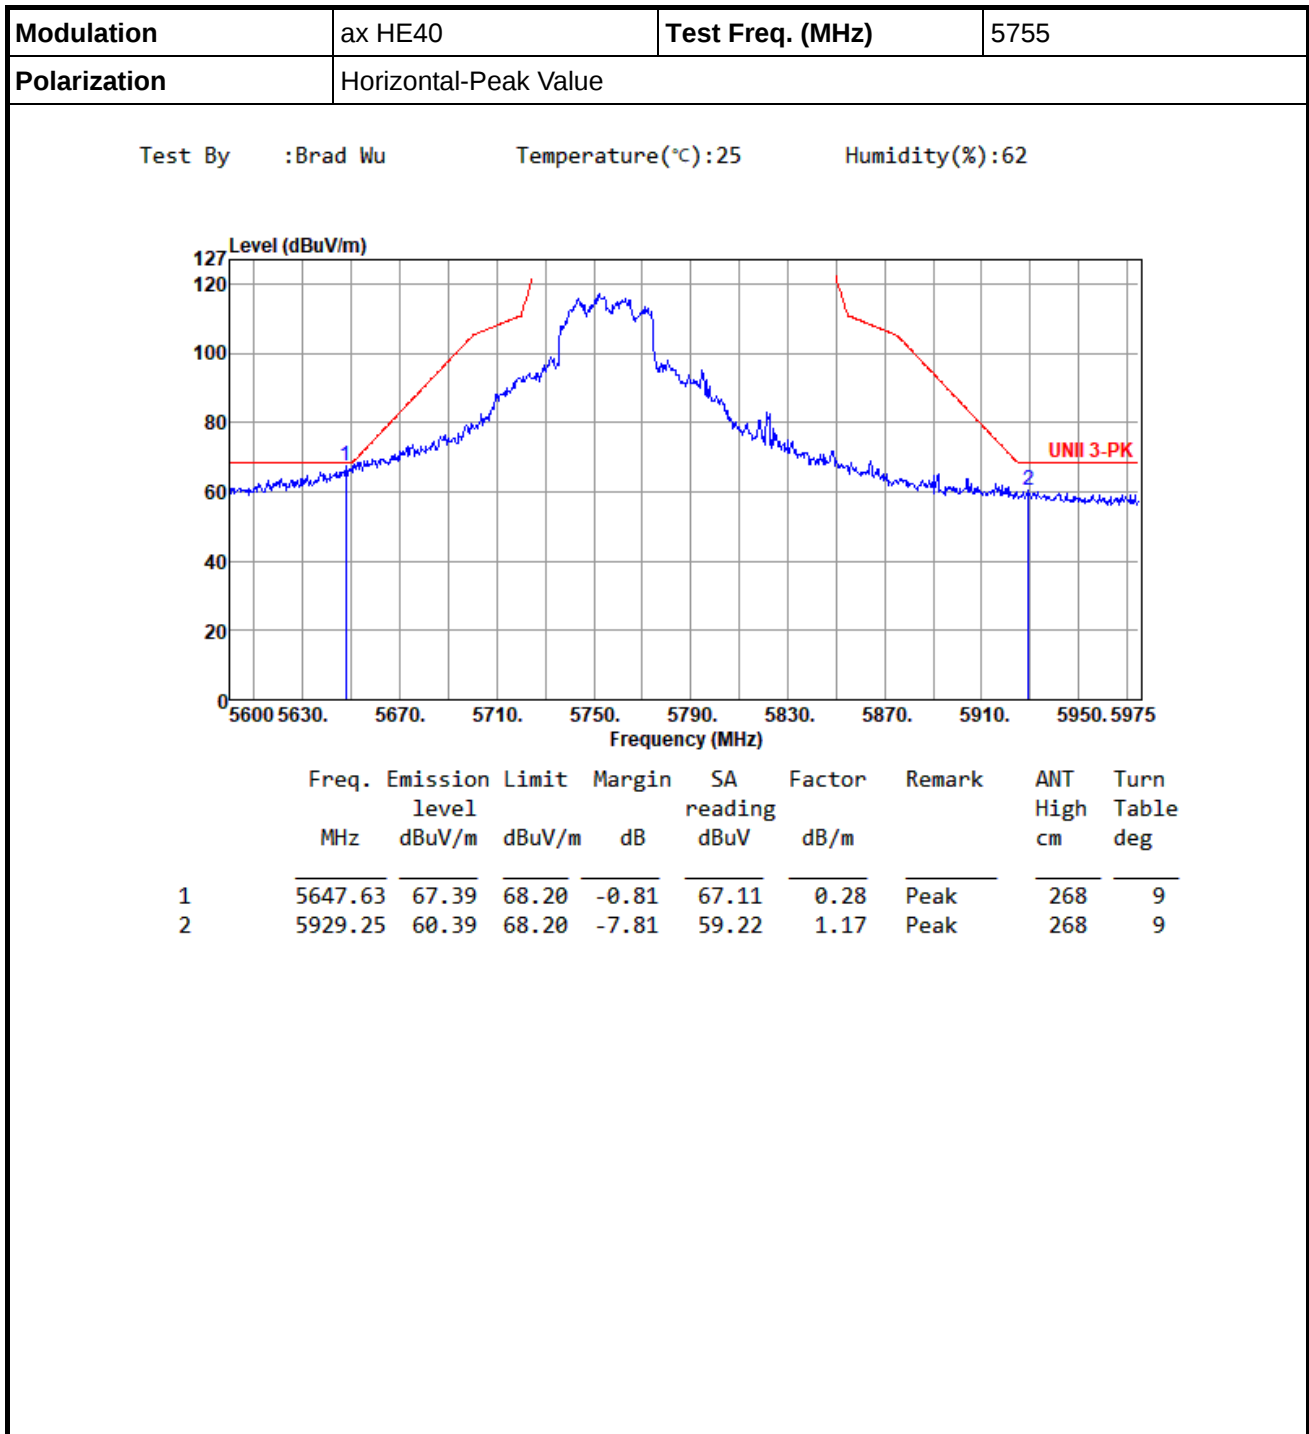


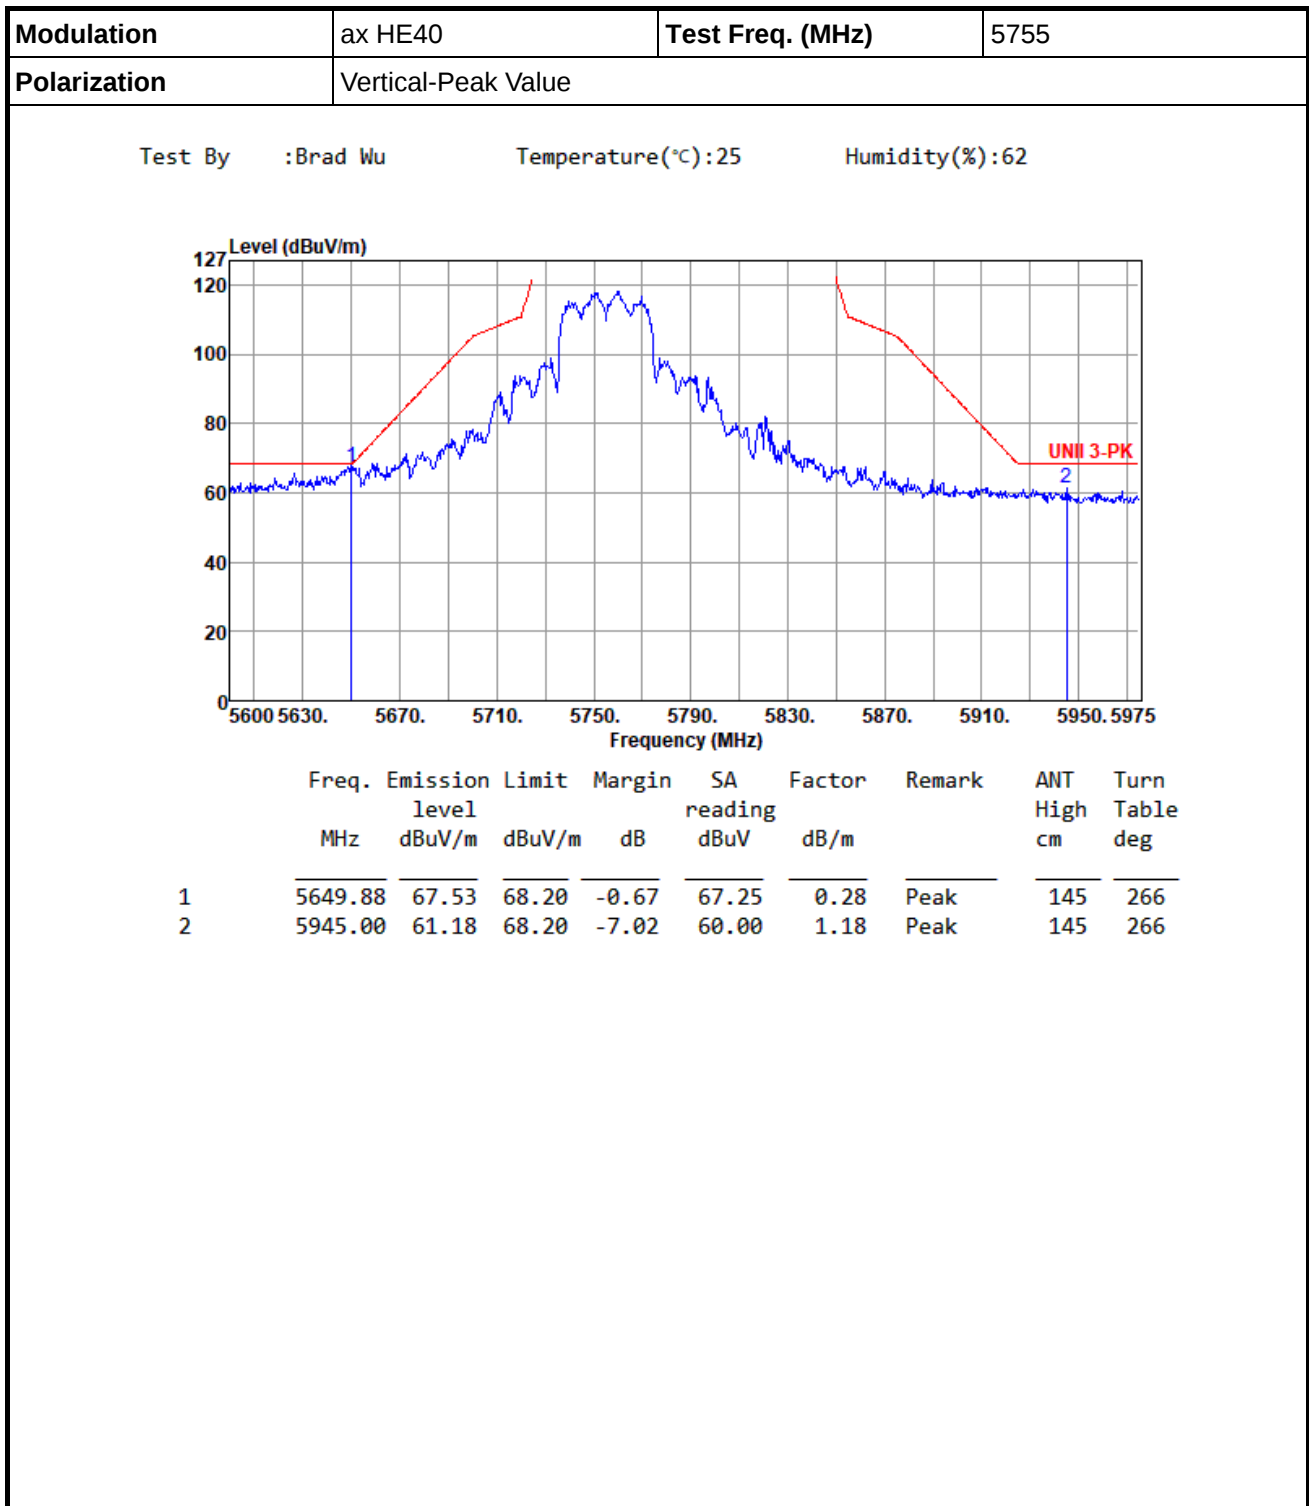


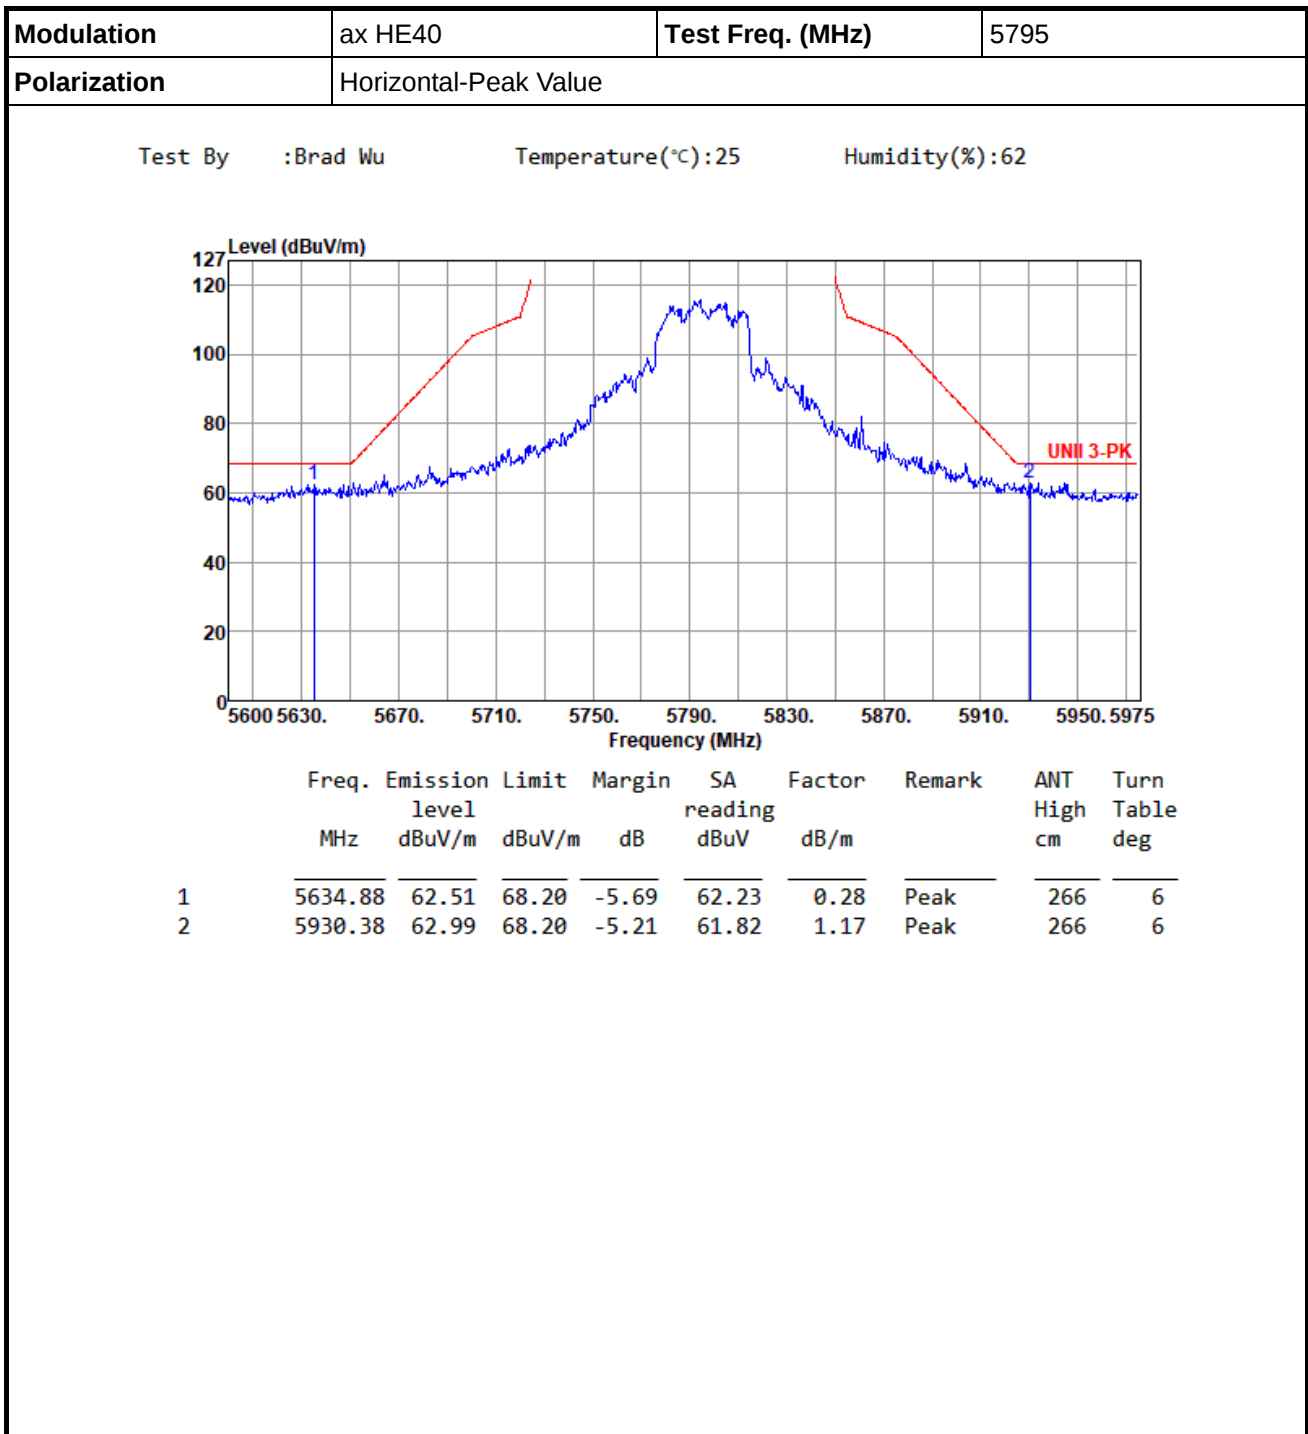


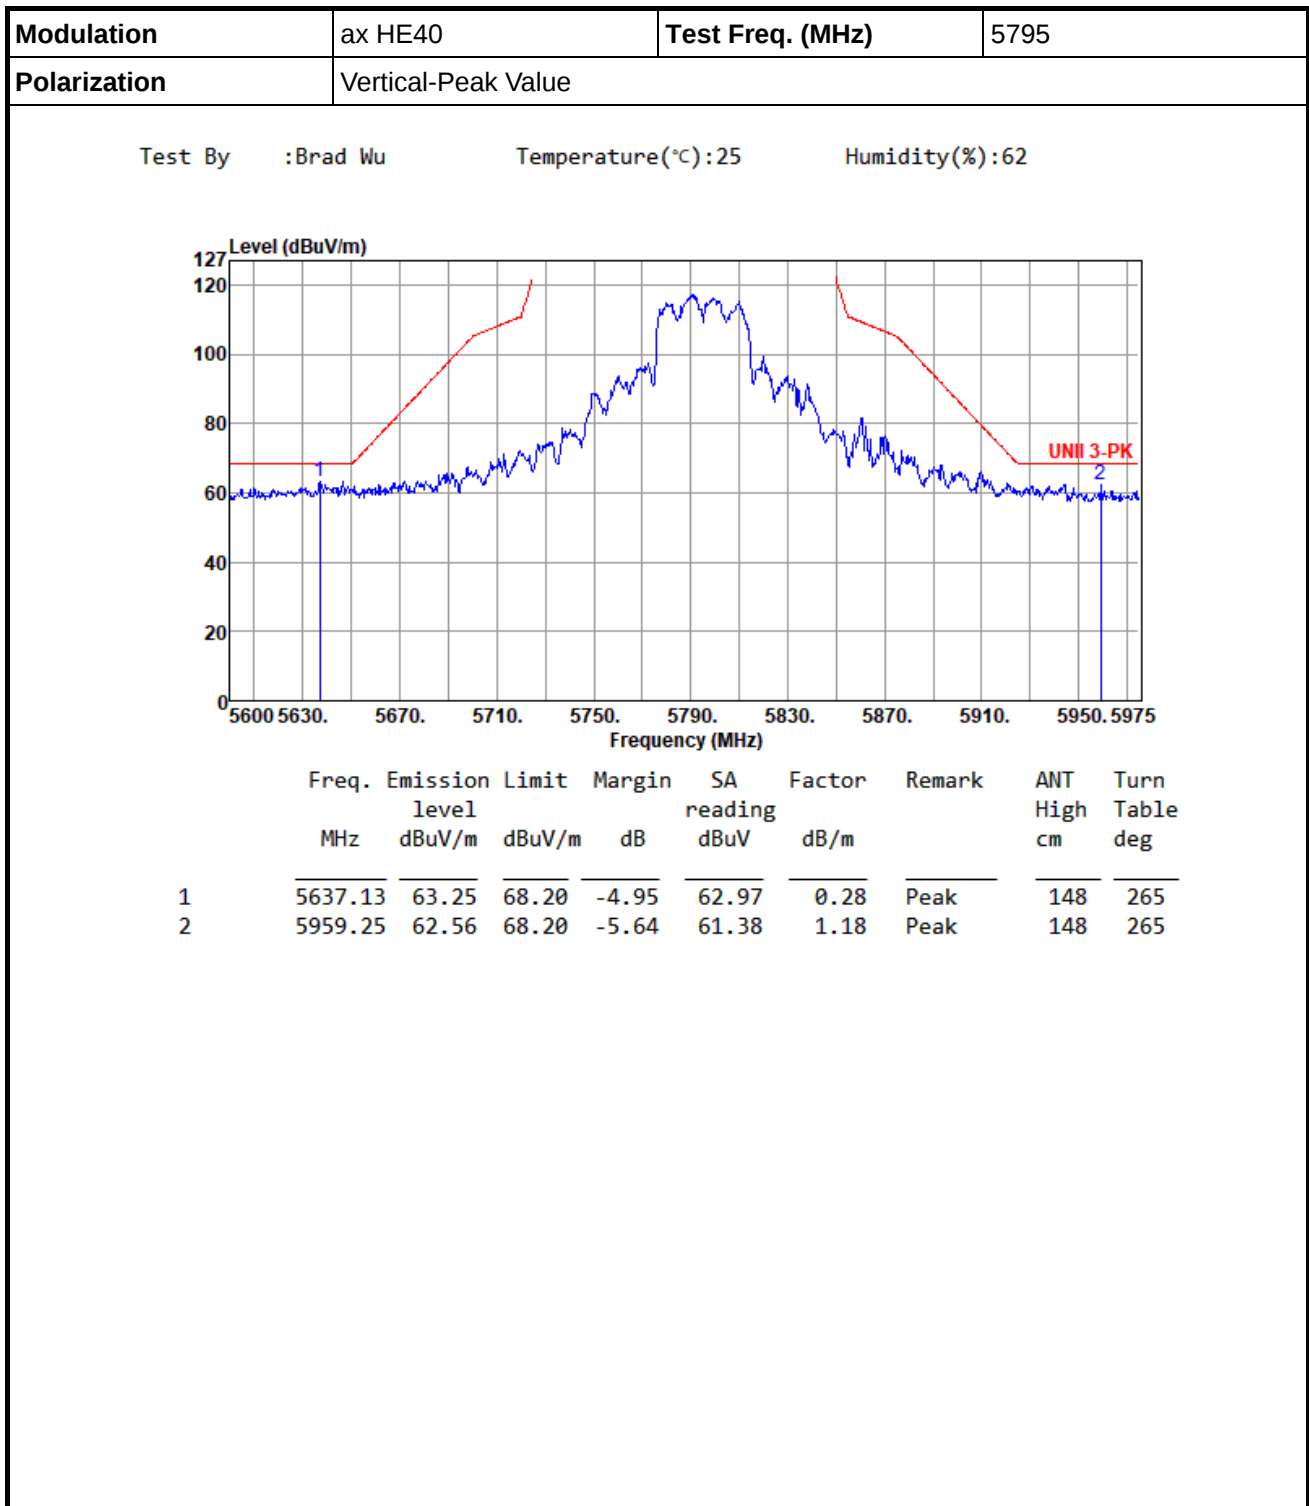


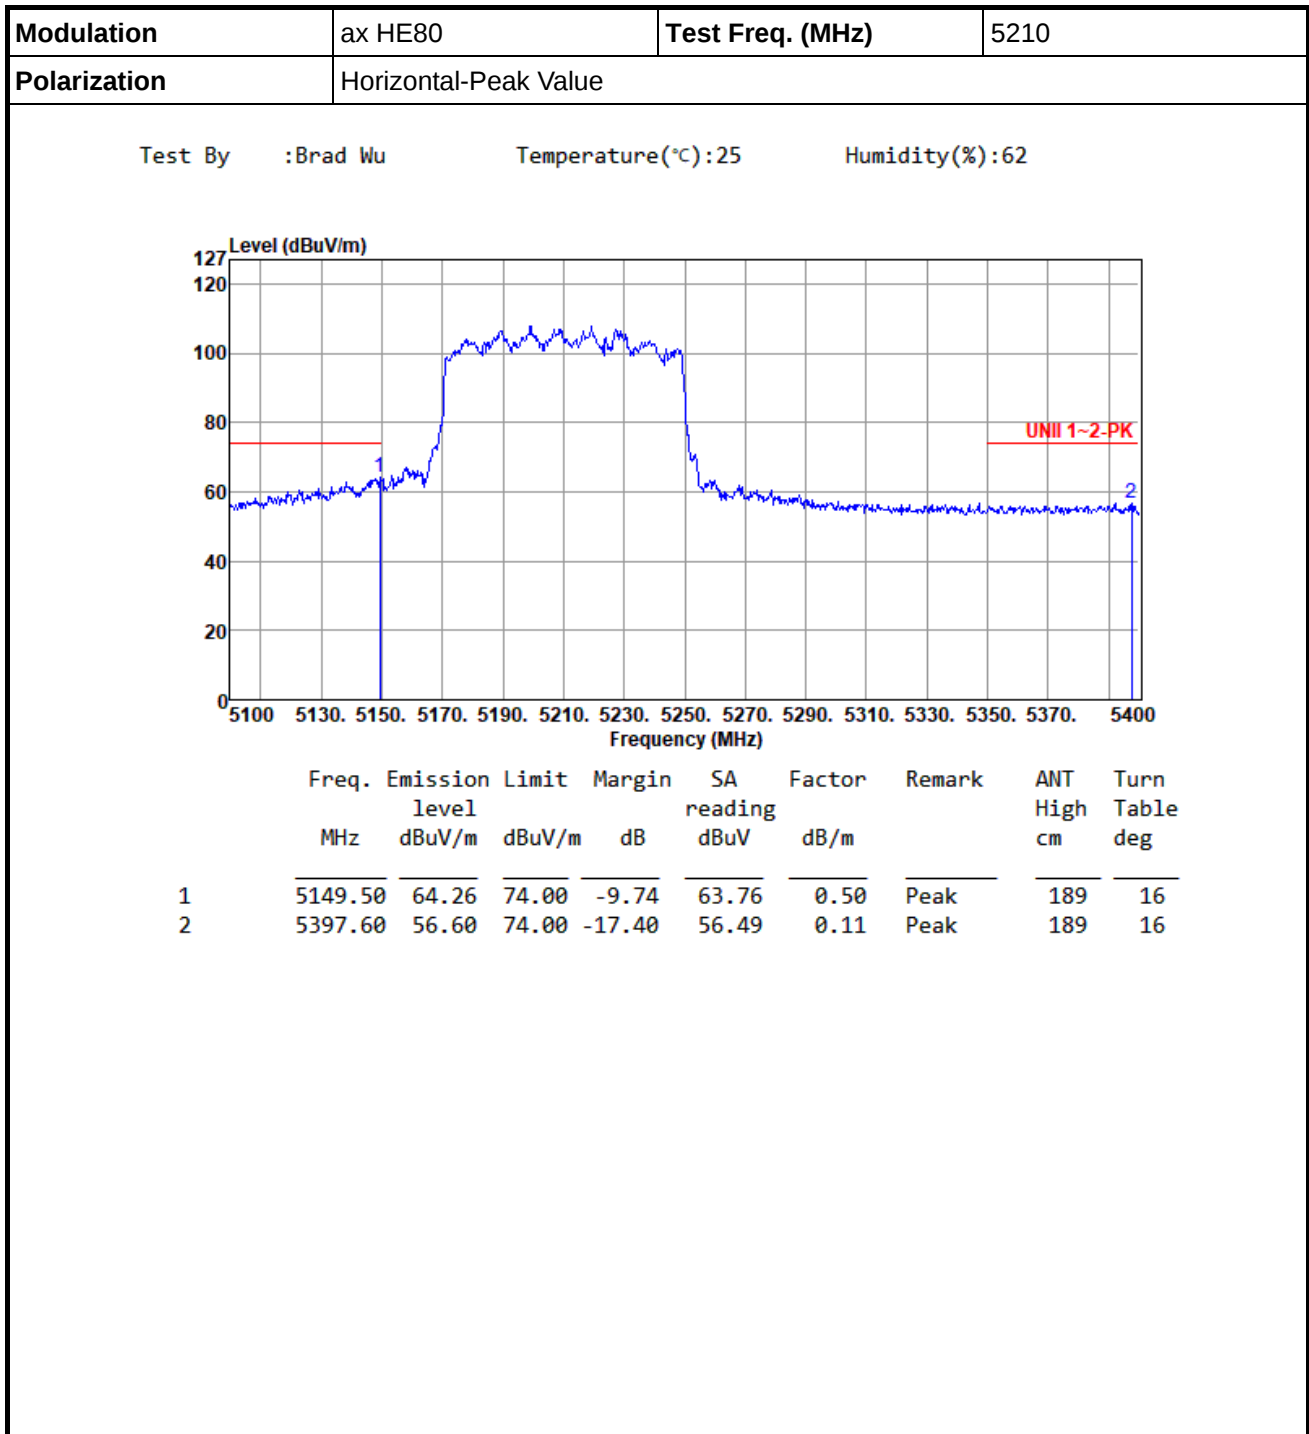


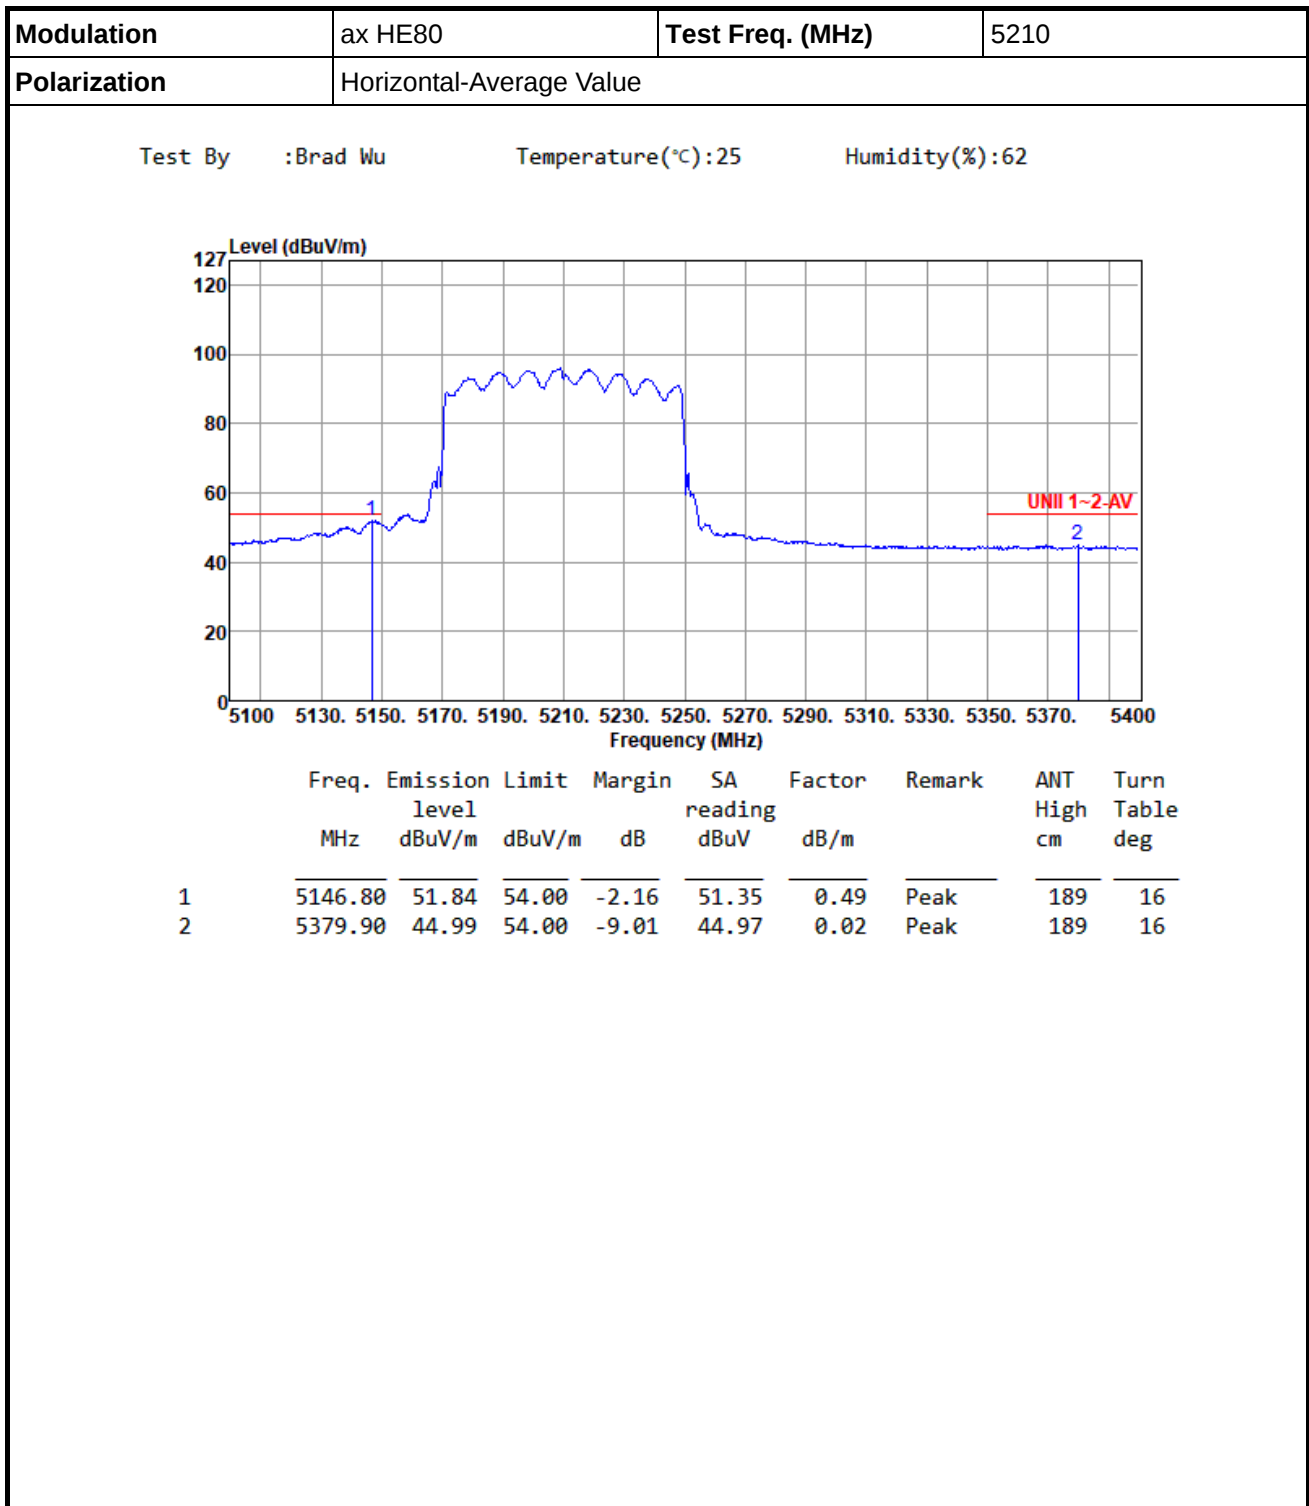


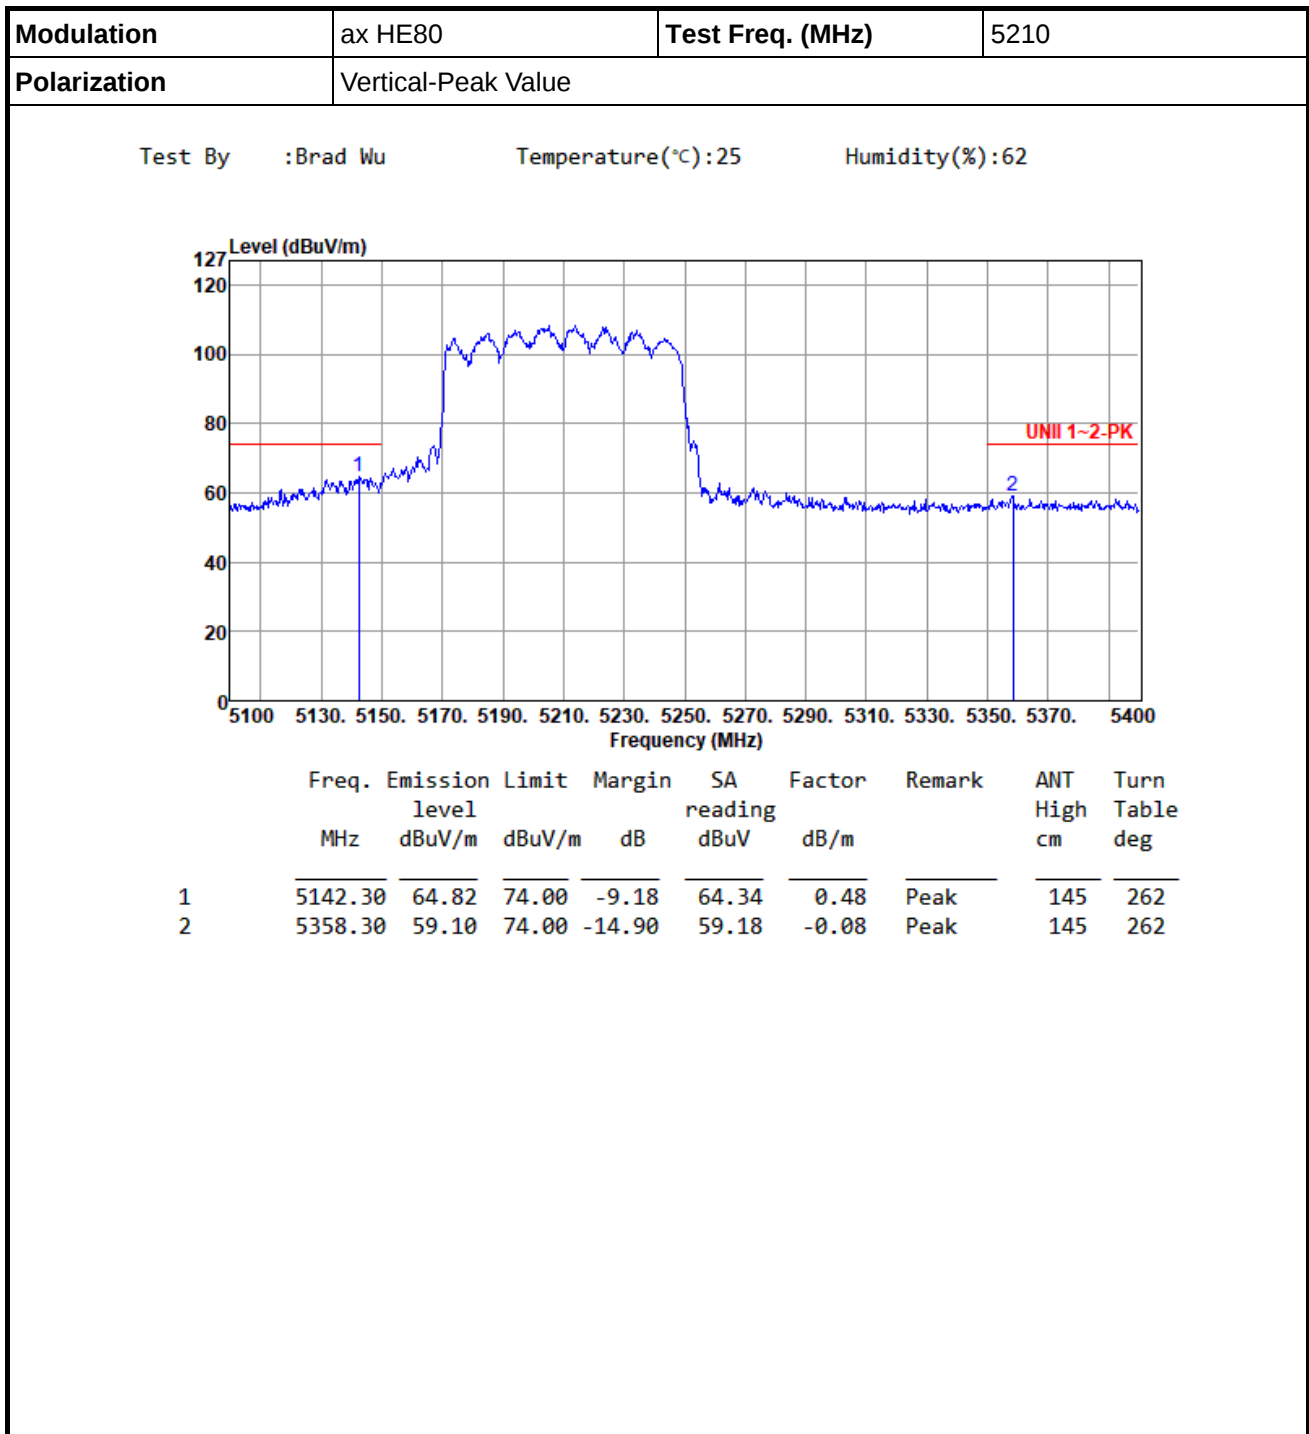


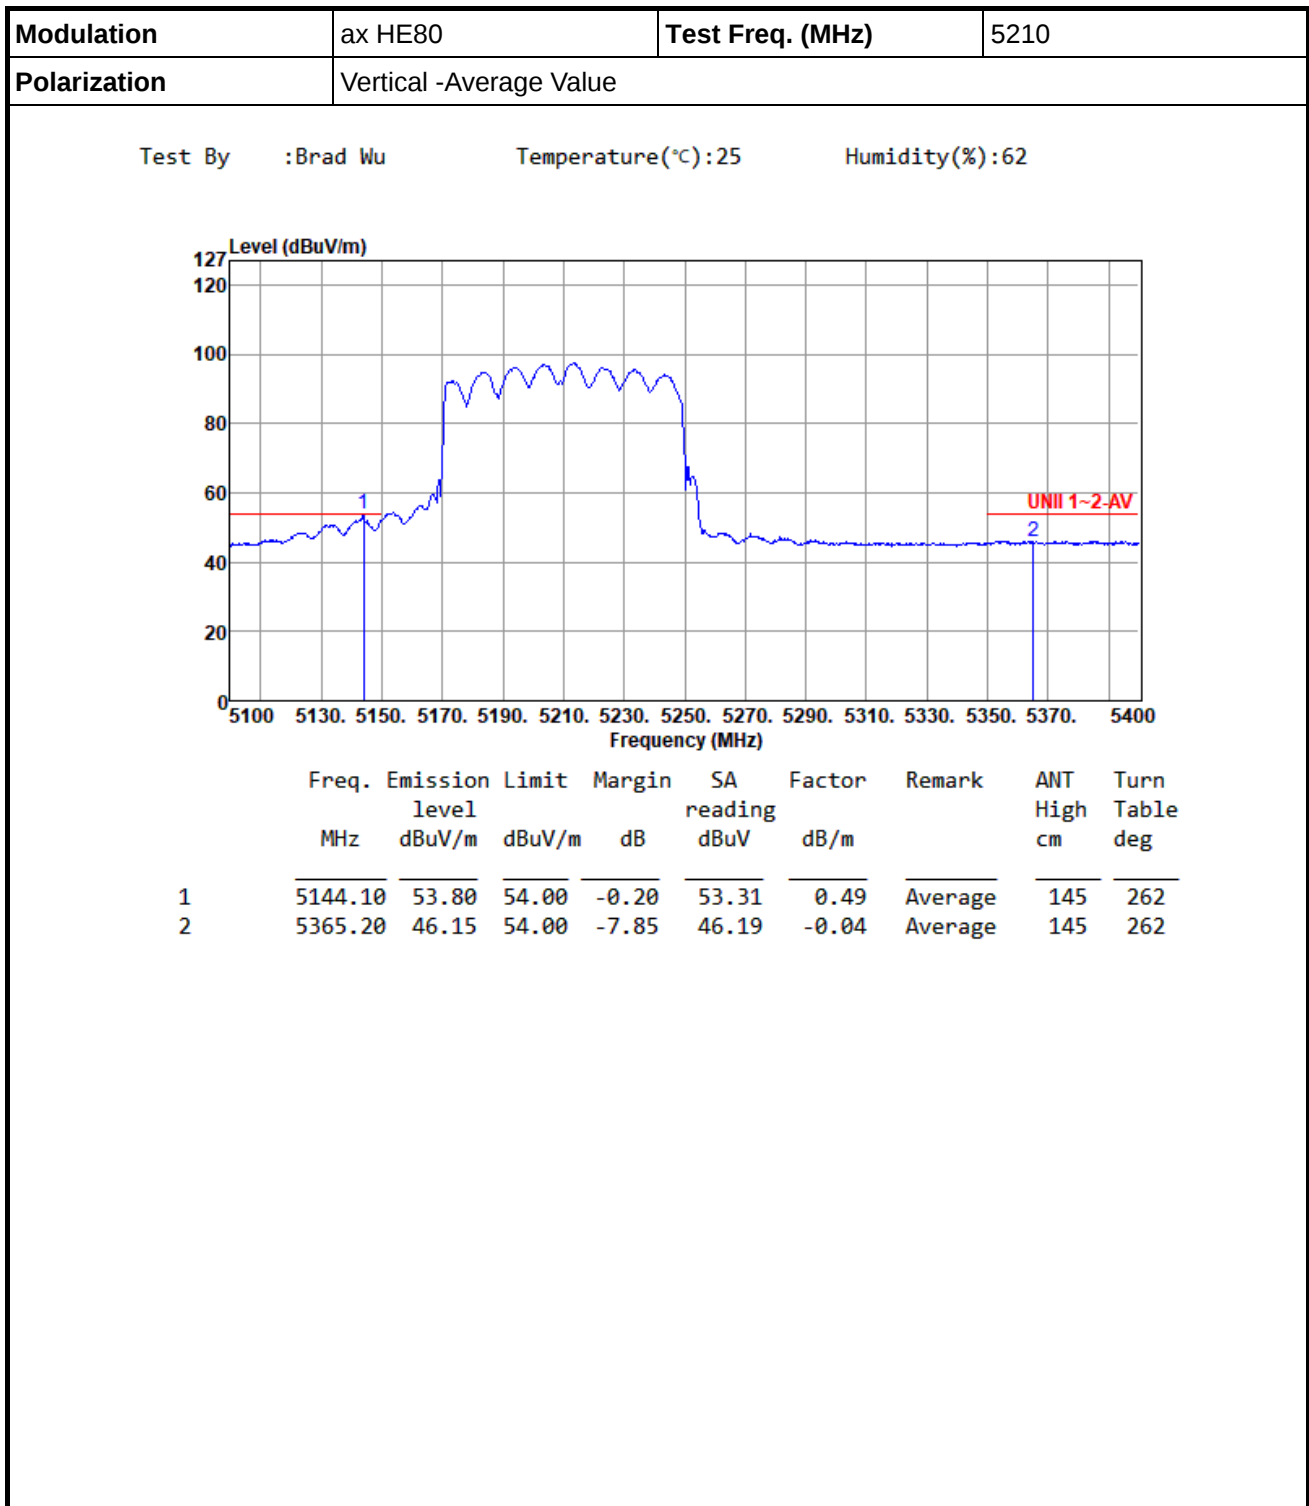


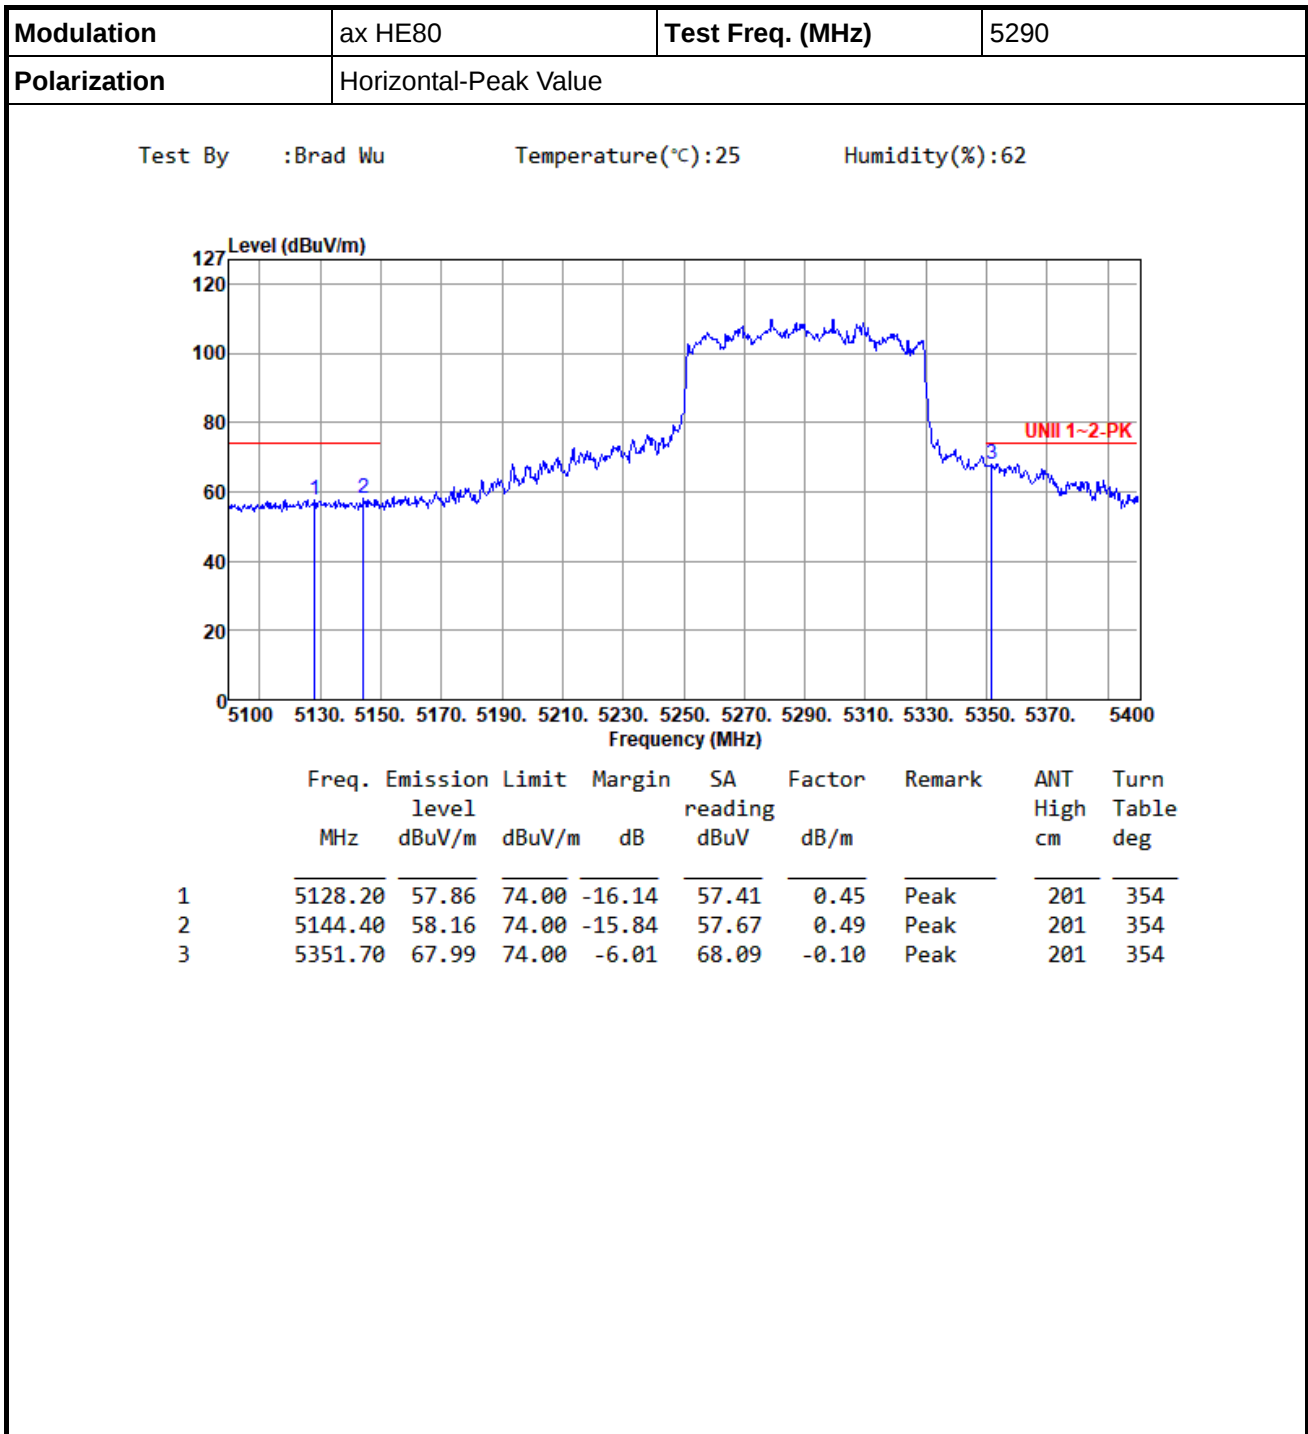


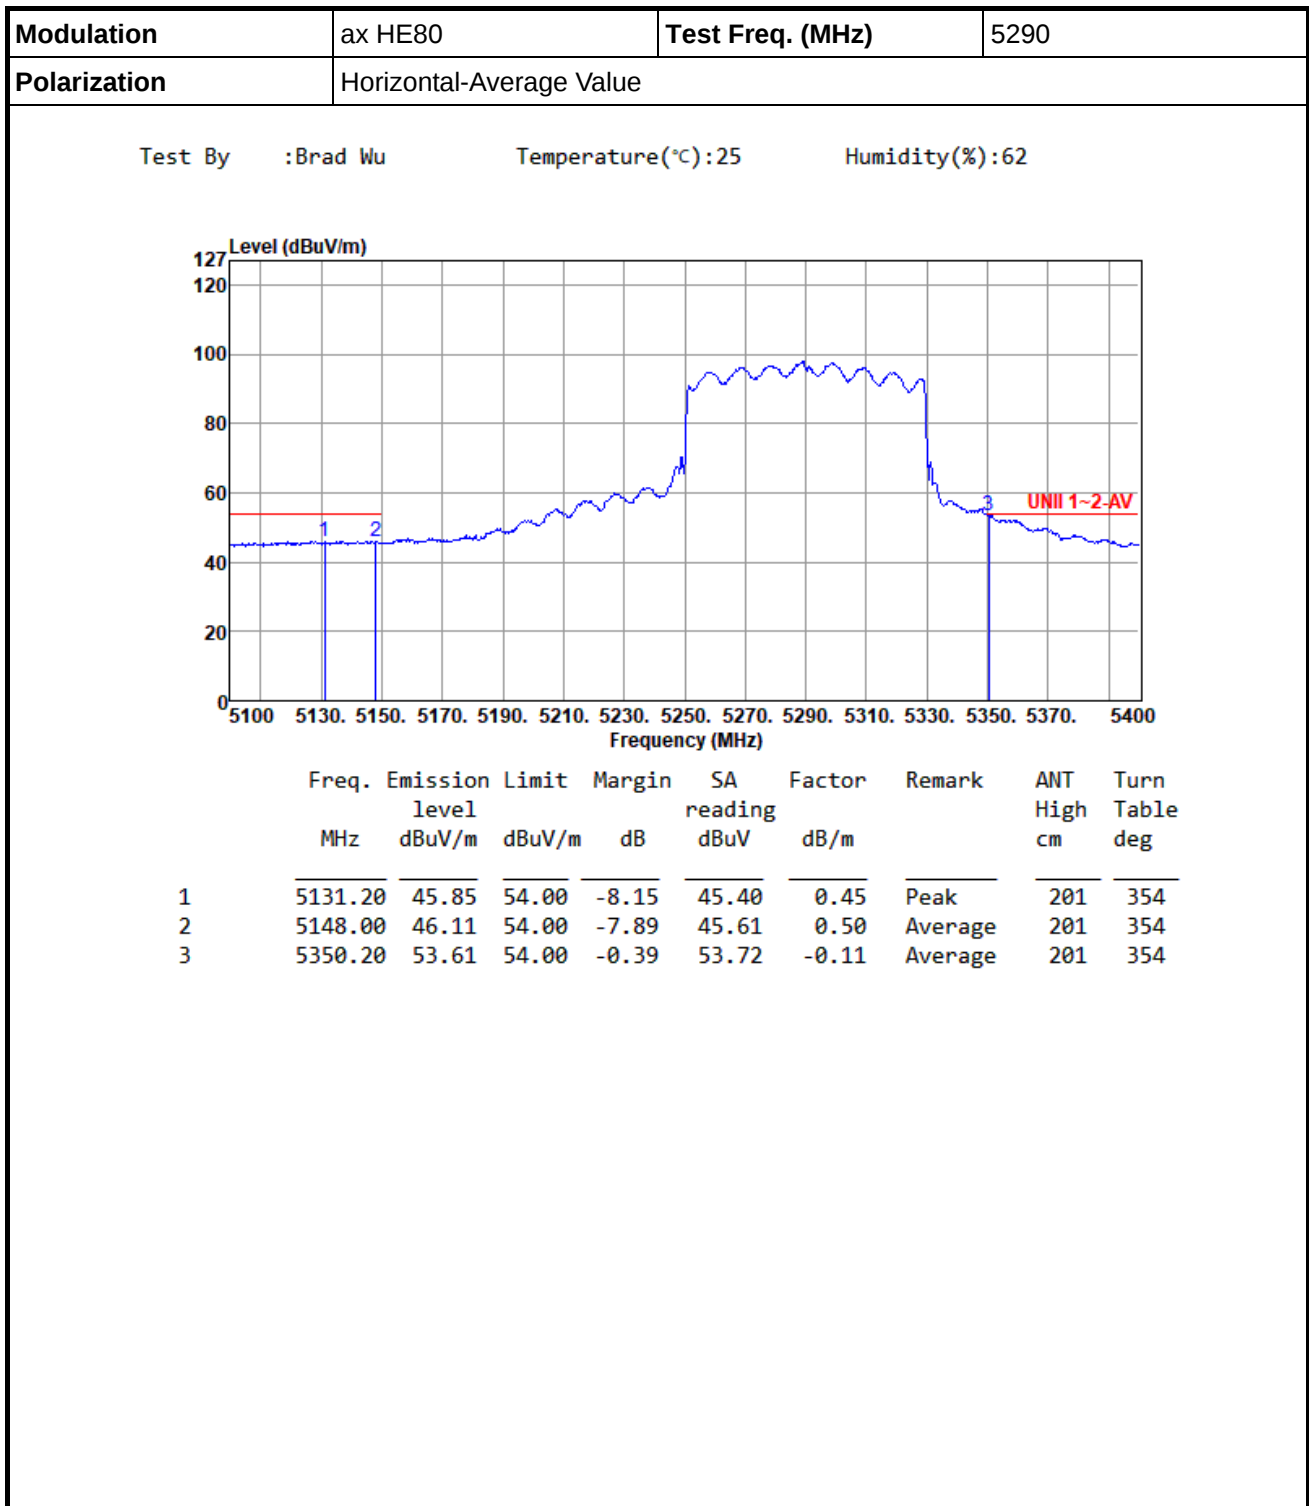


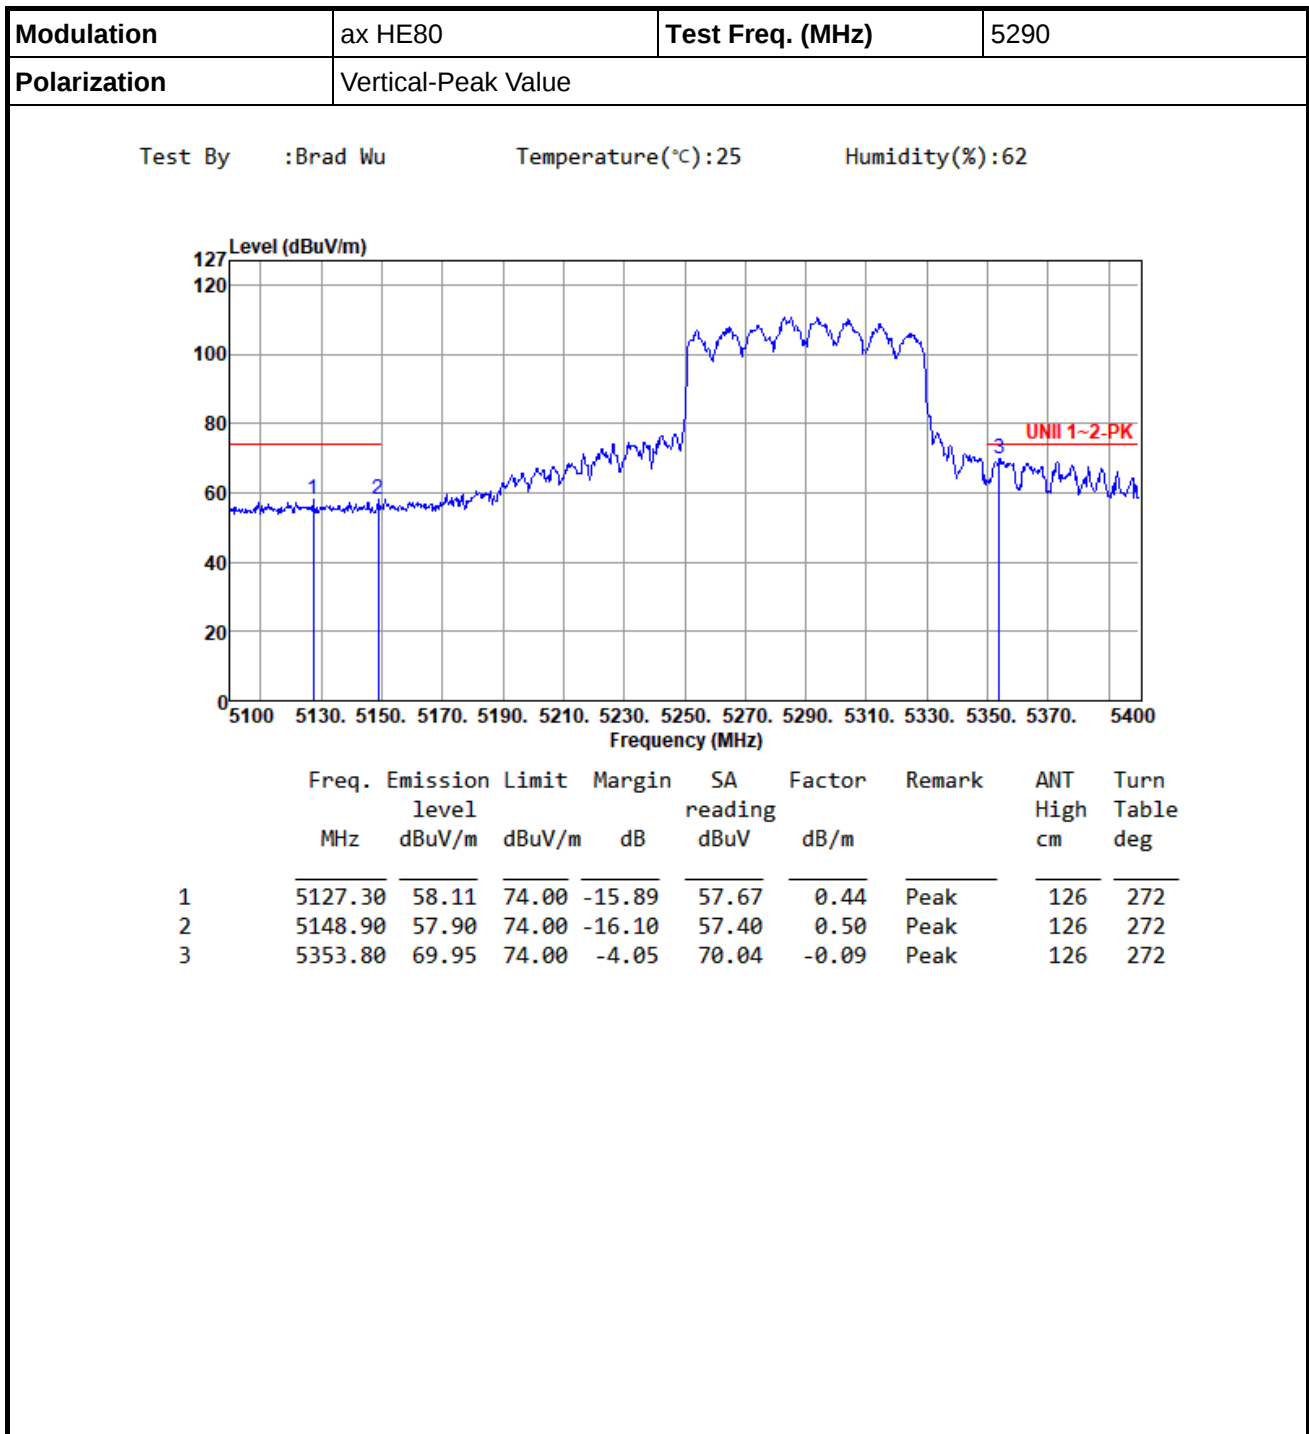

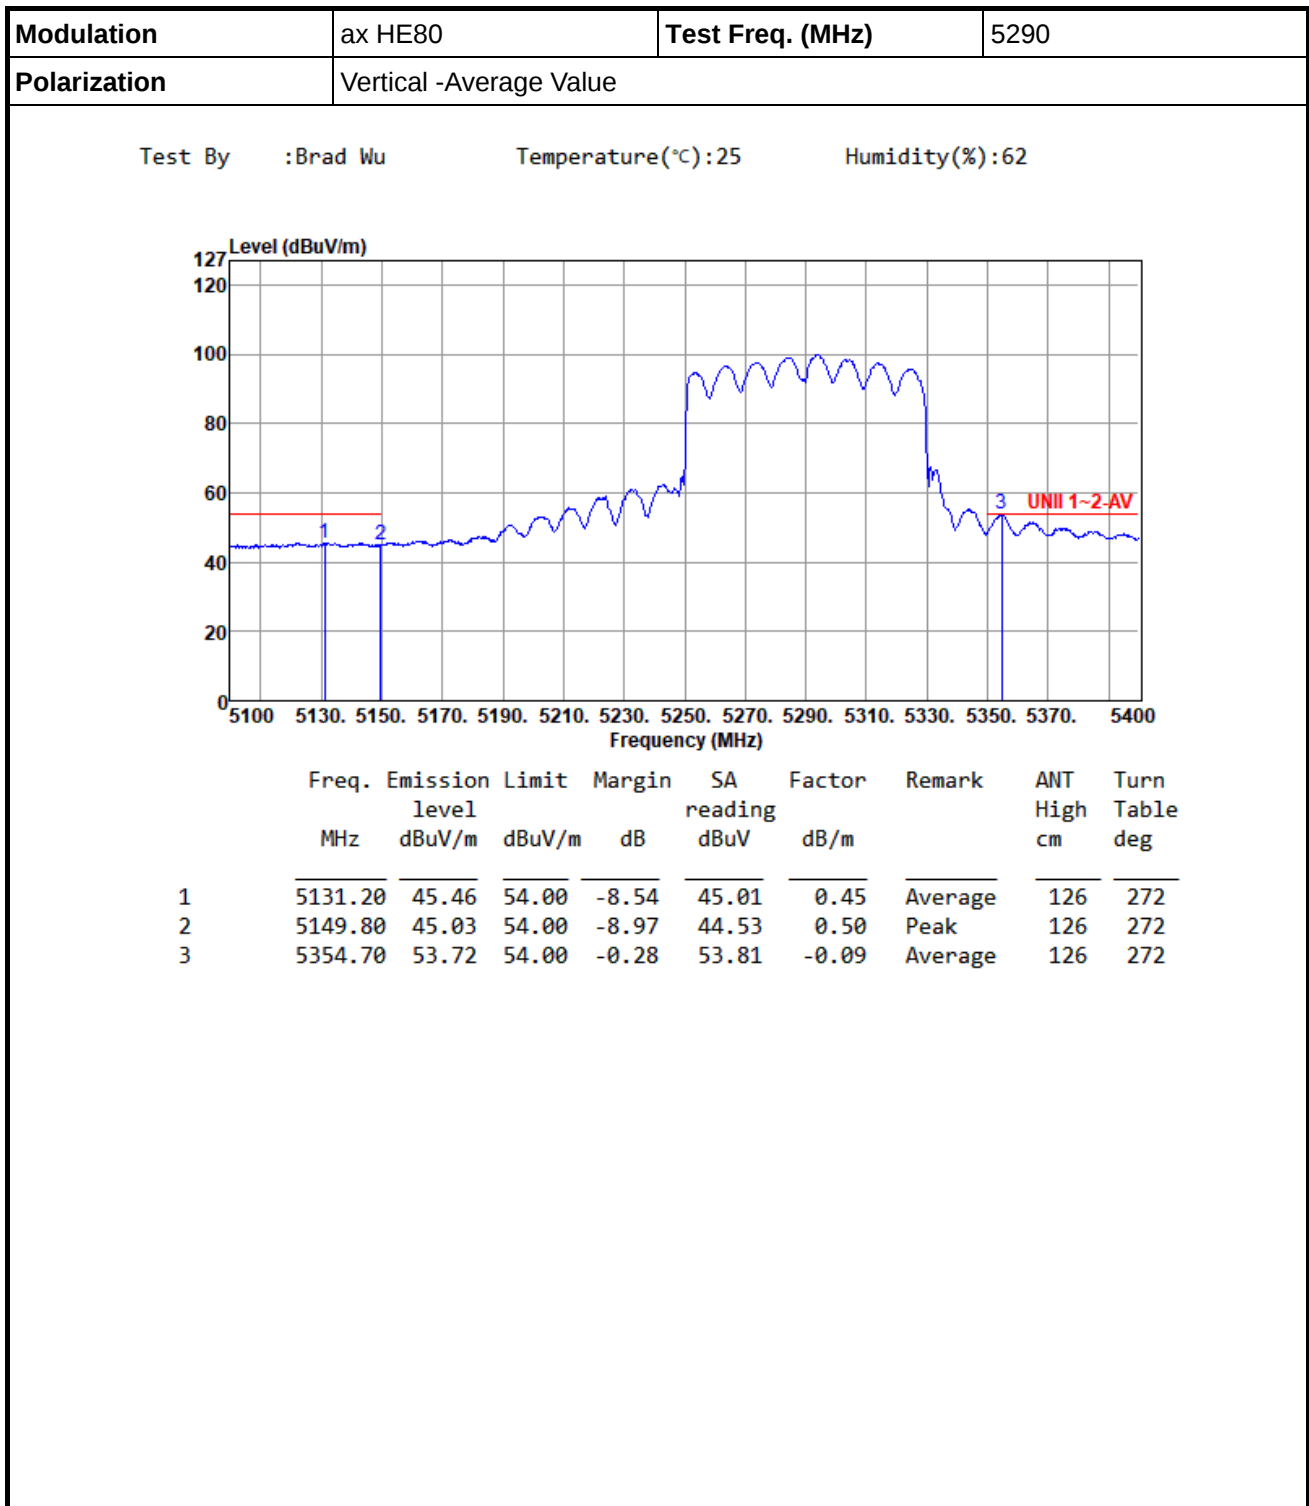


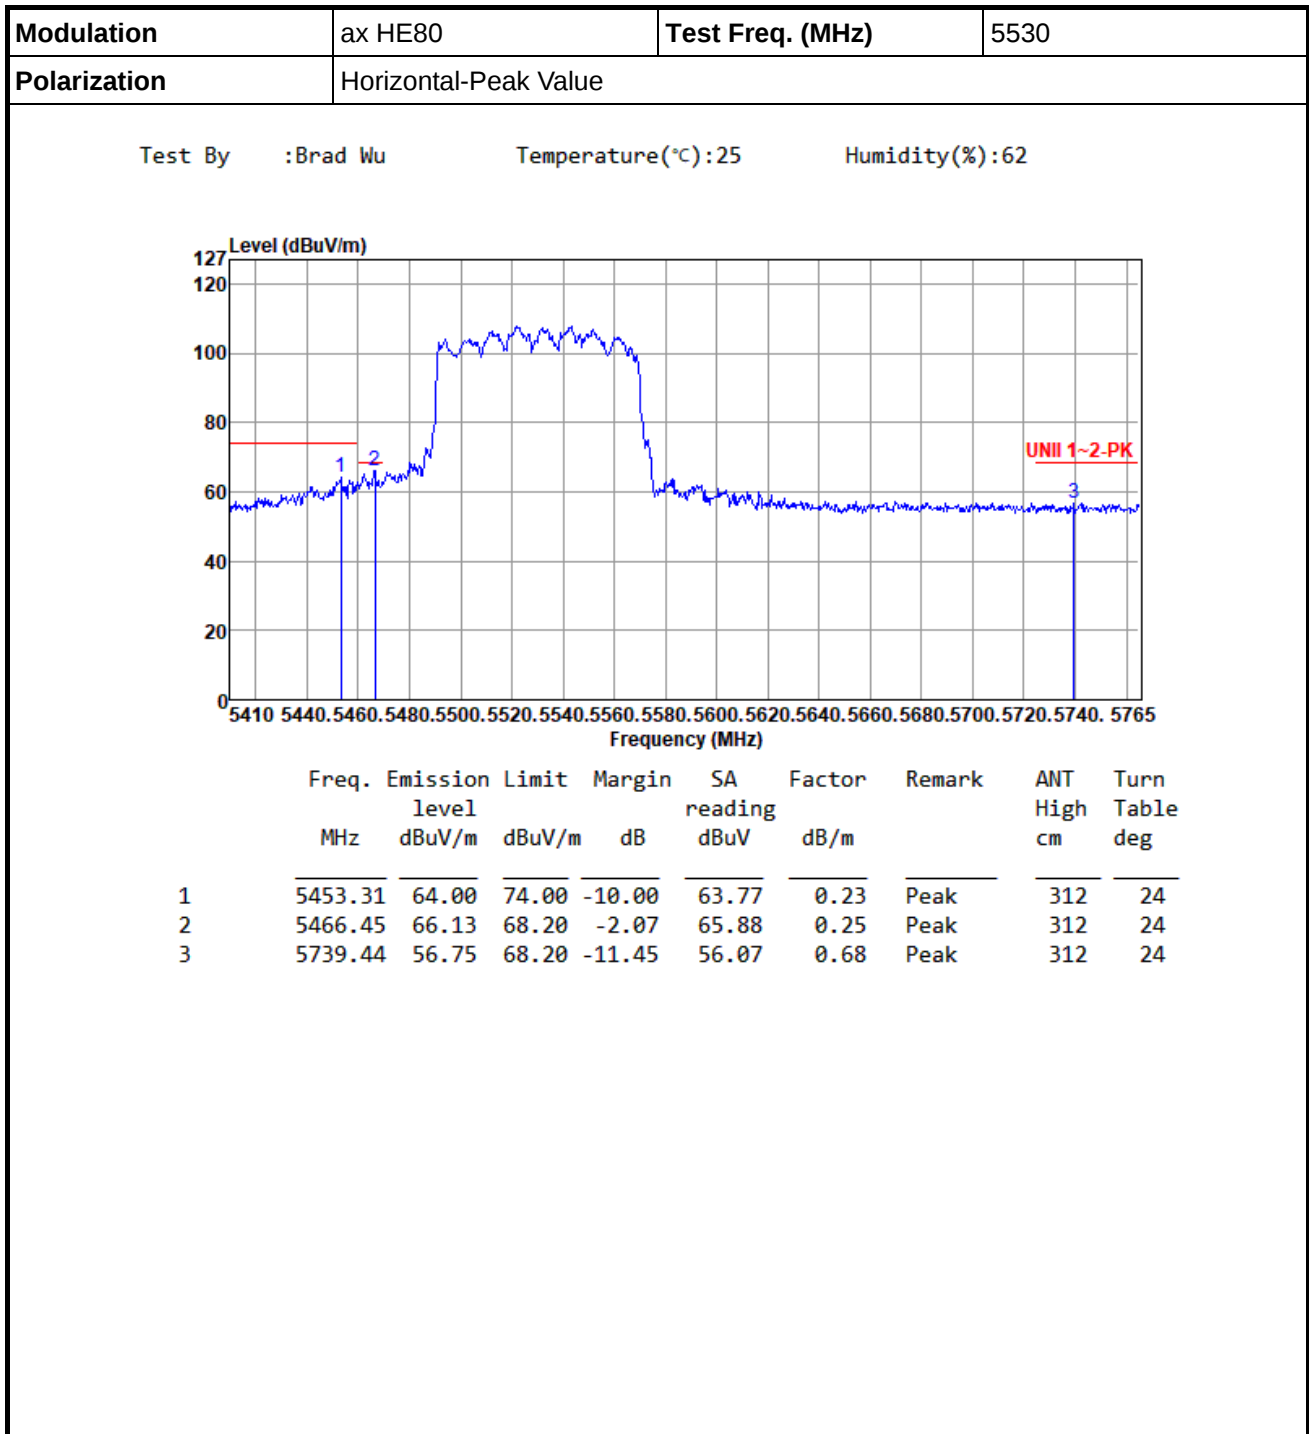


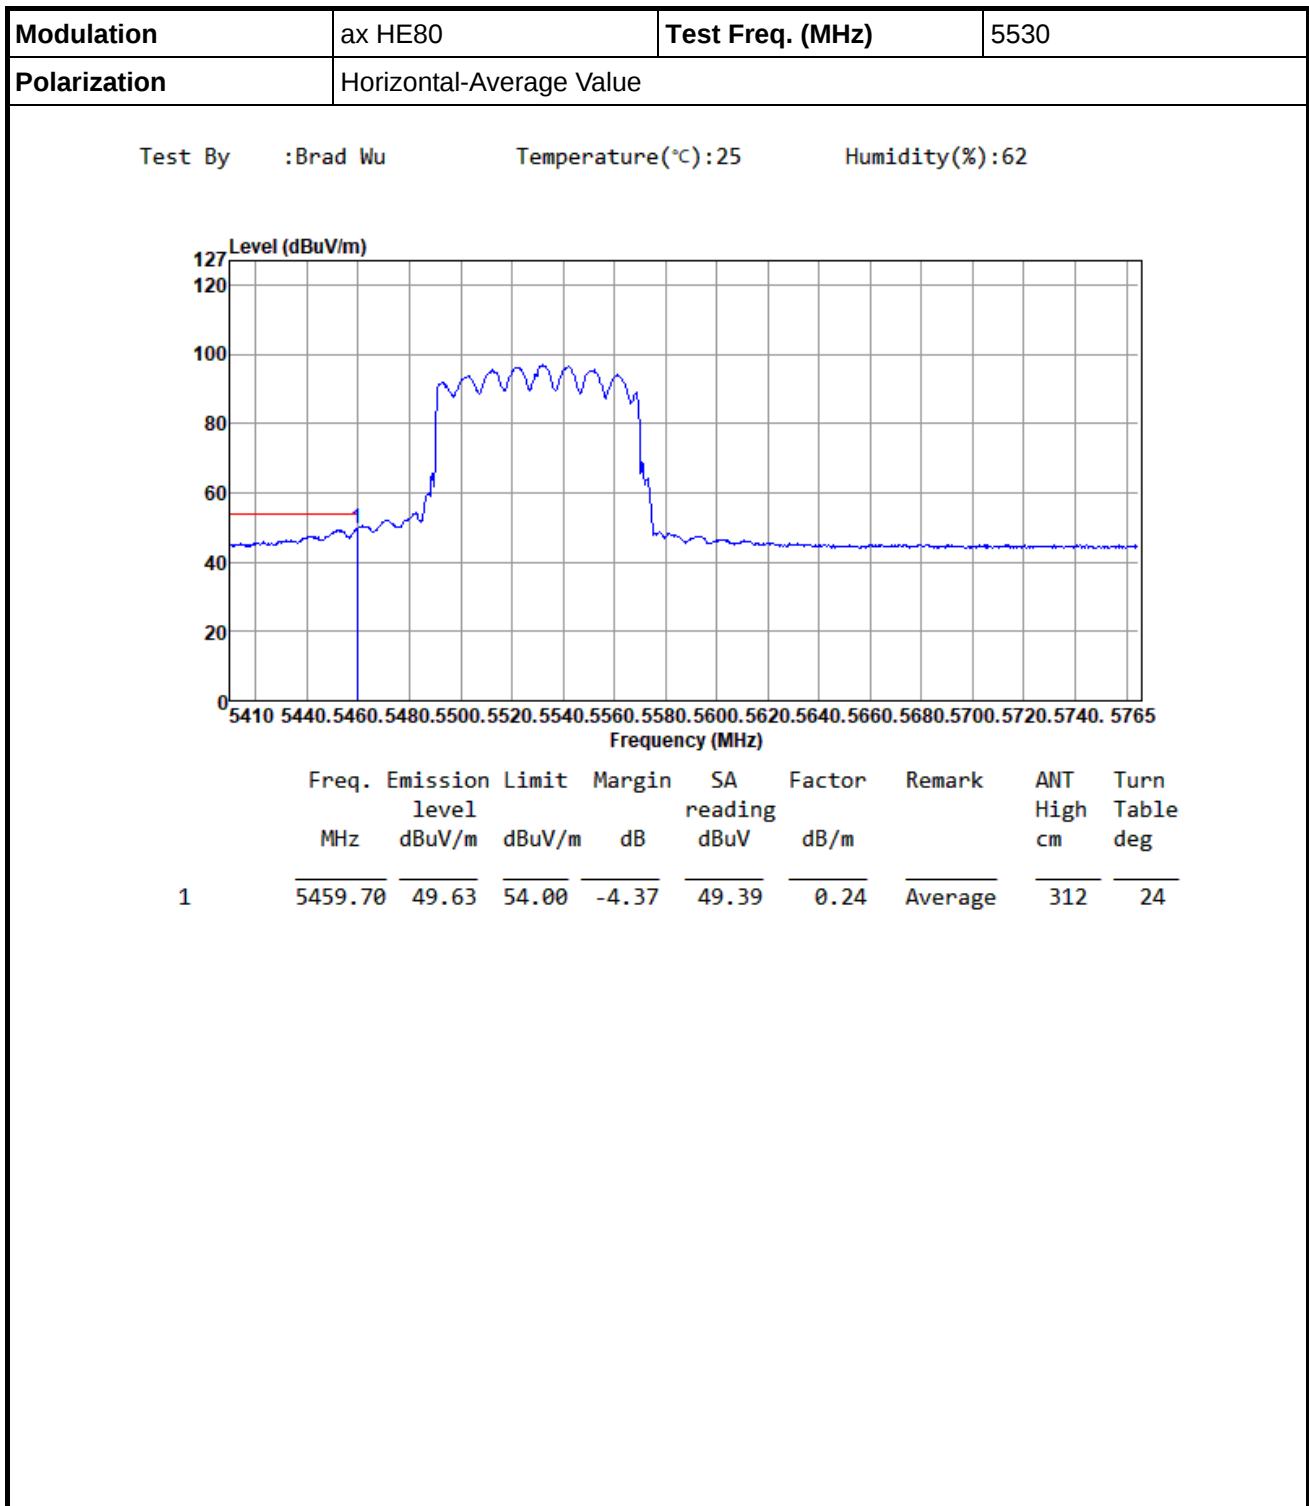


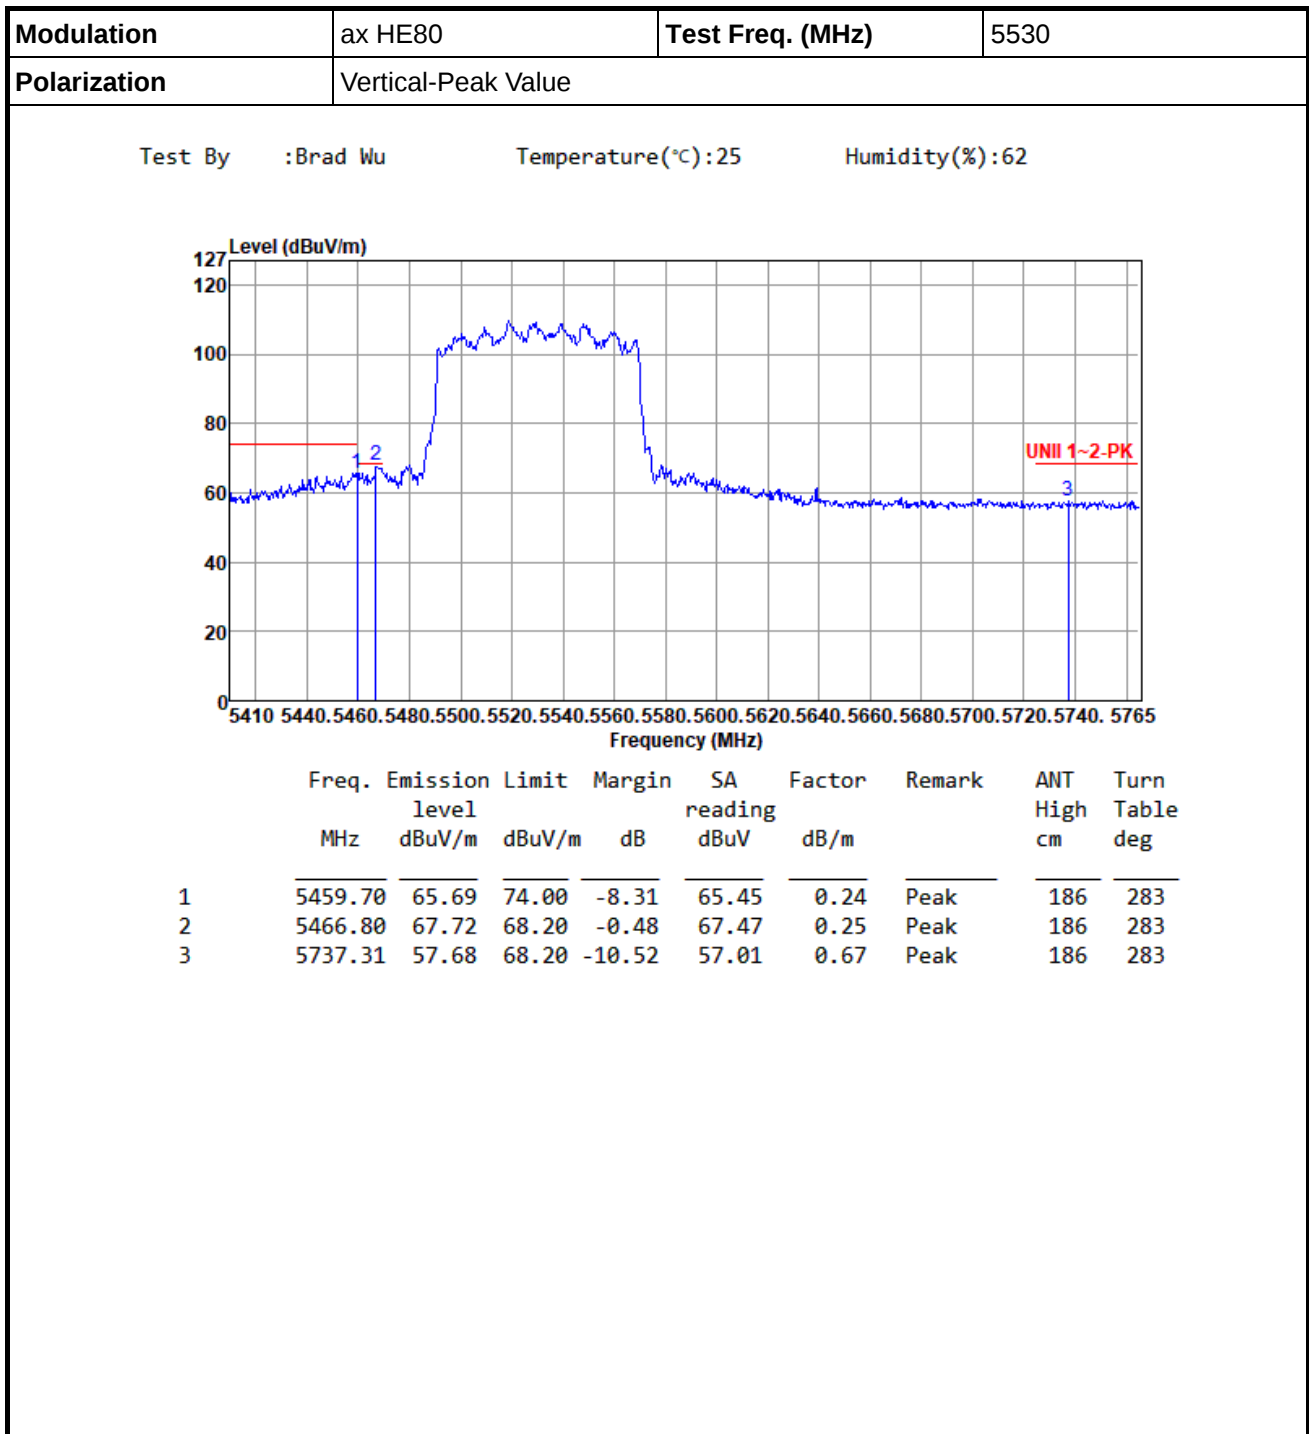


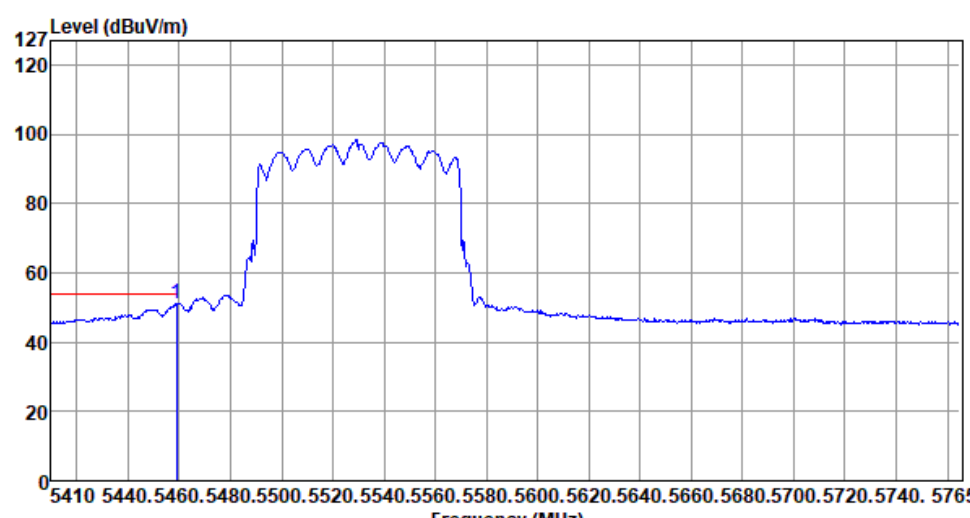



Modulation	ax HE80	Test Freq. (MHz)	5530						
Polarization	Vertical -Average Value								
Test By :Brad Wu Temperature(°C):25 Humidity(%):62									
Level (dBuV/m)  Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	level				reading			High	Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5458.99	51.11	54.00	-2.89	50.87	0.24	Average	186	283

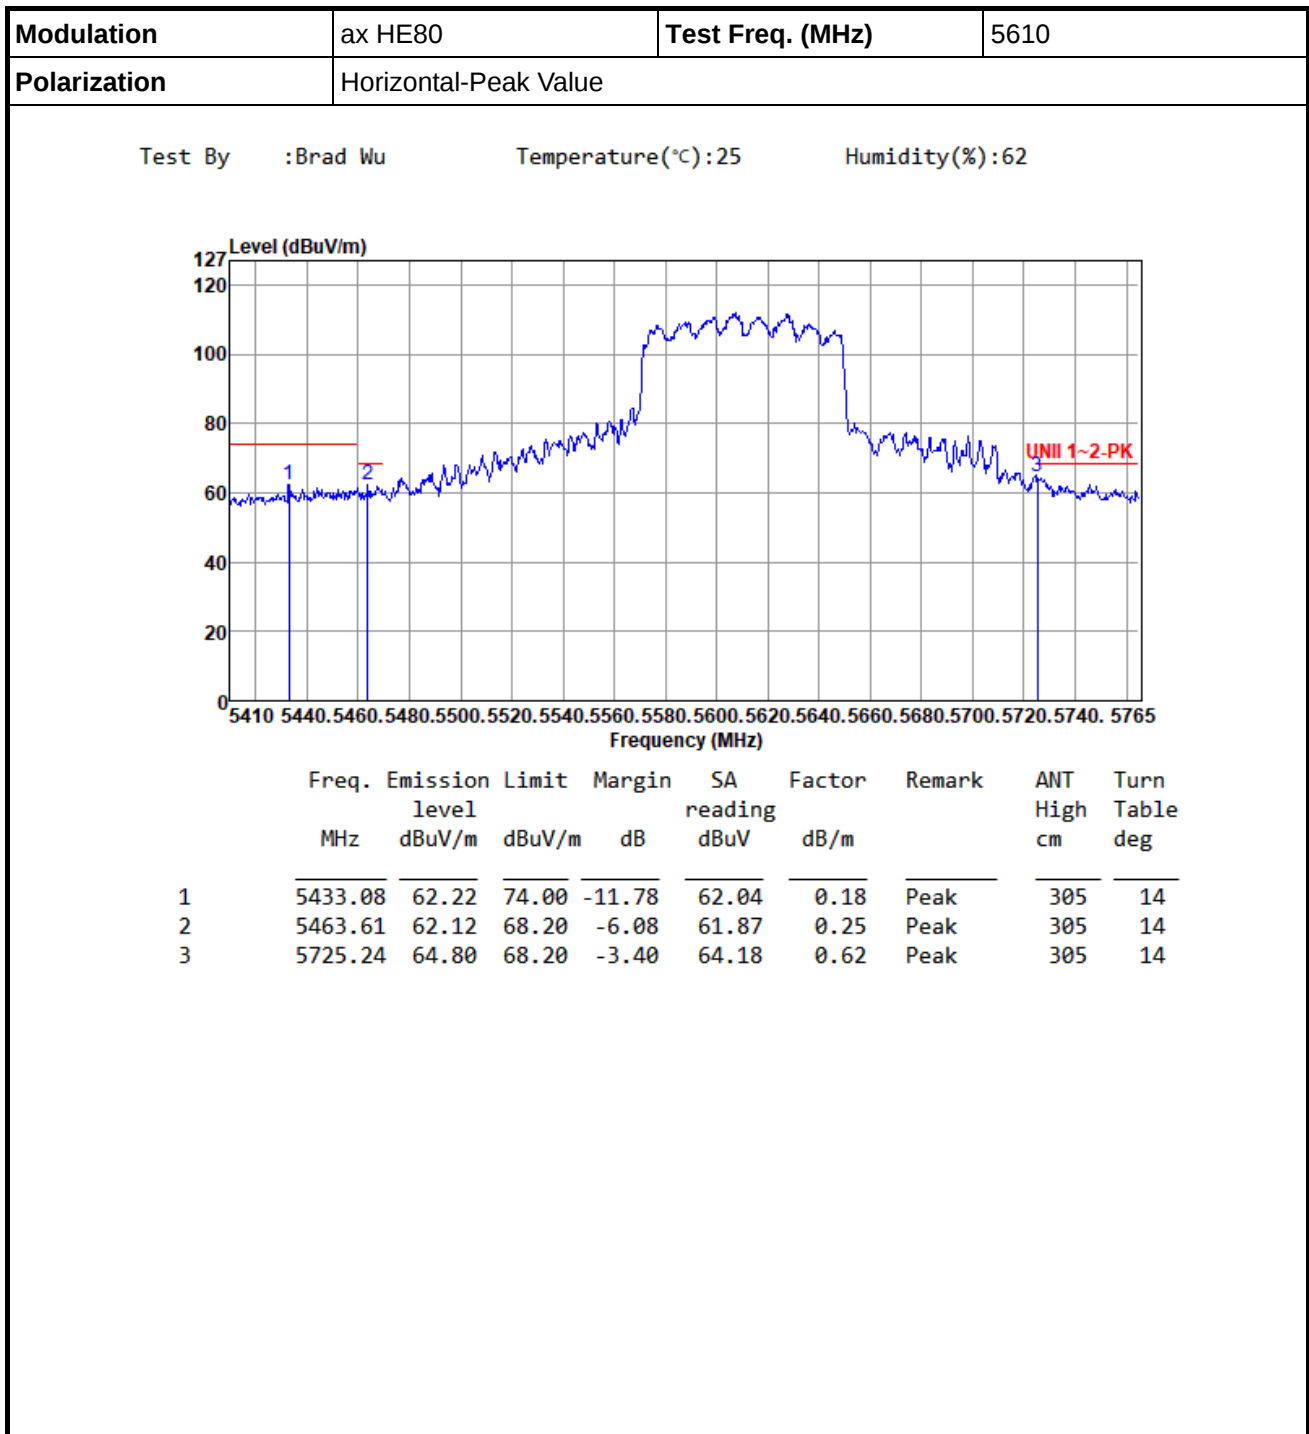


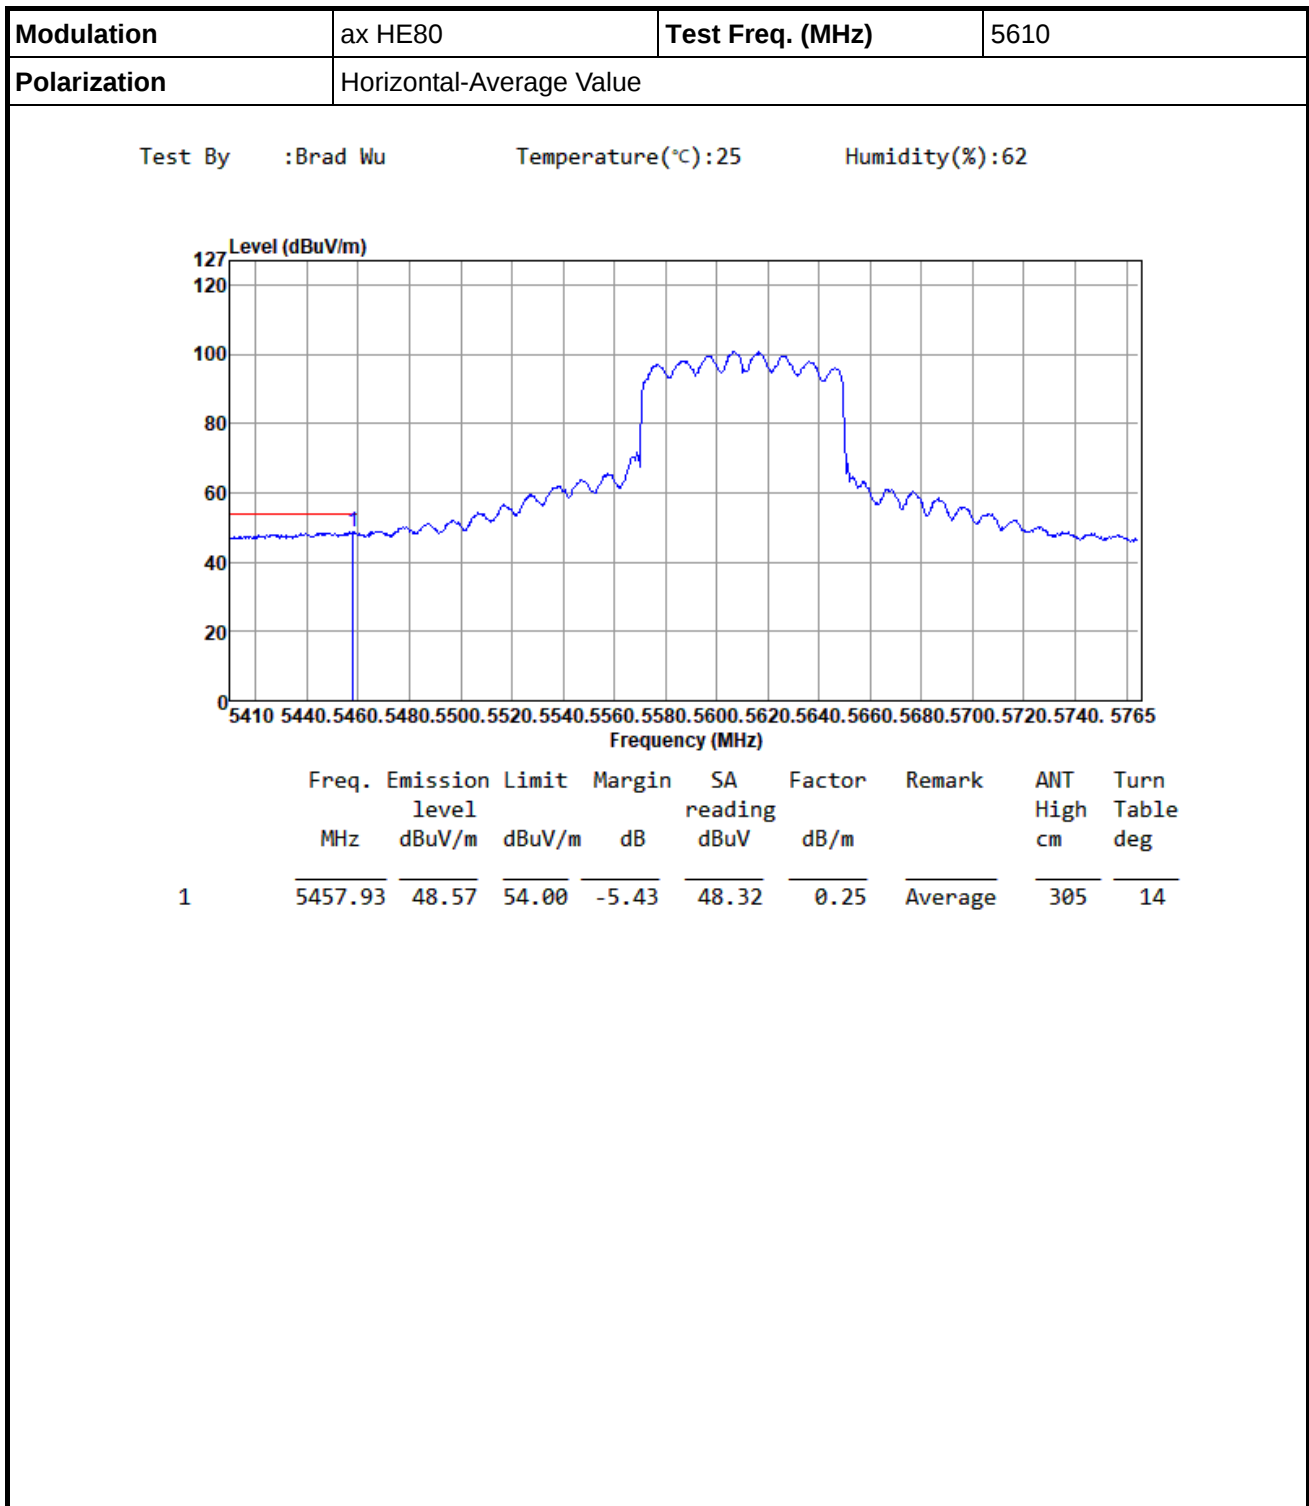


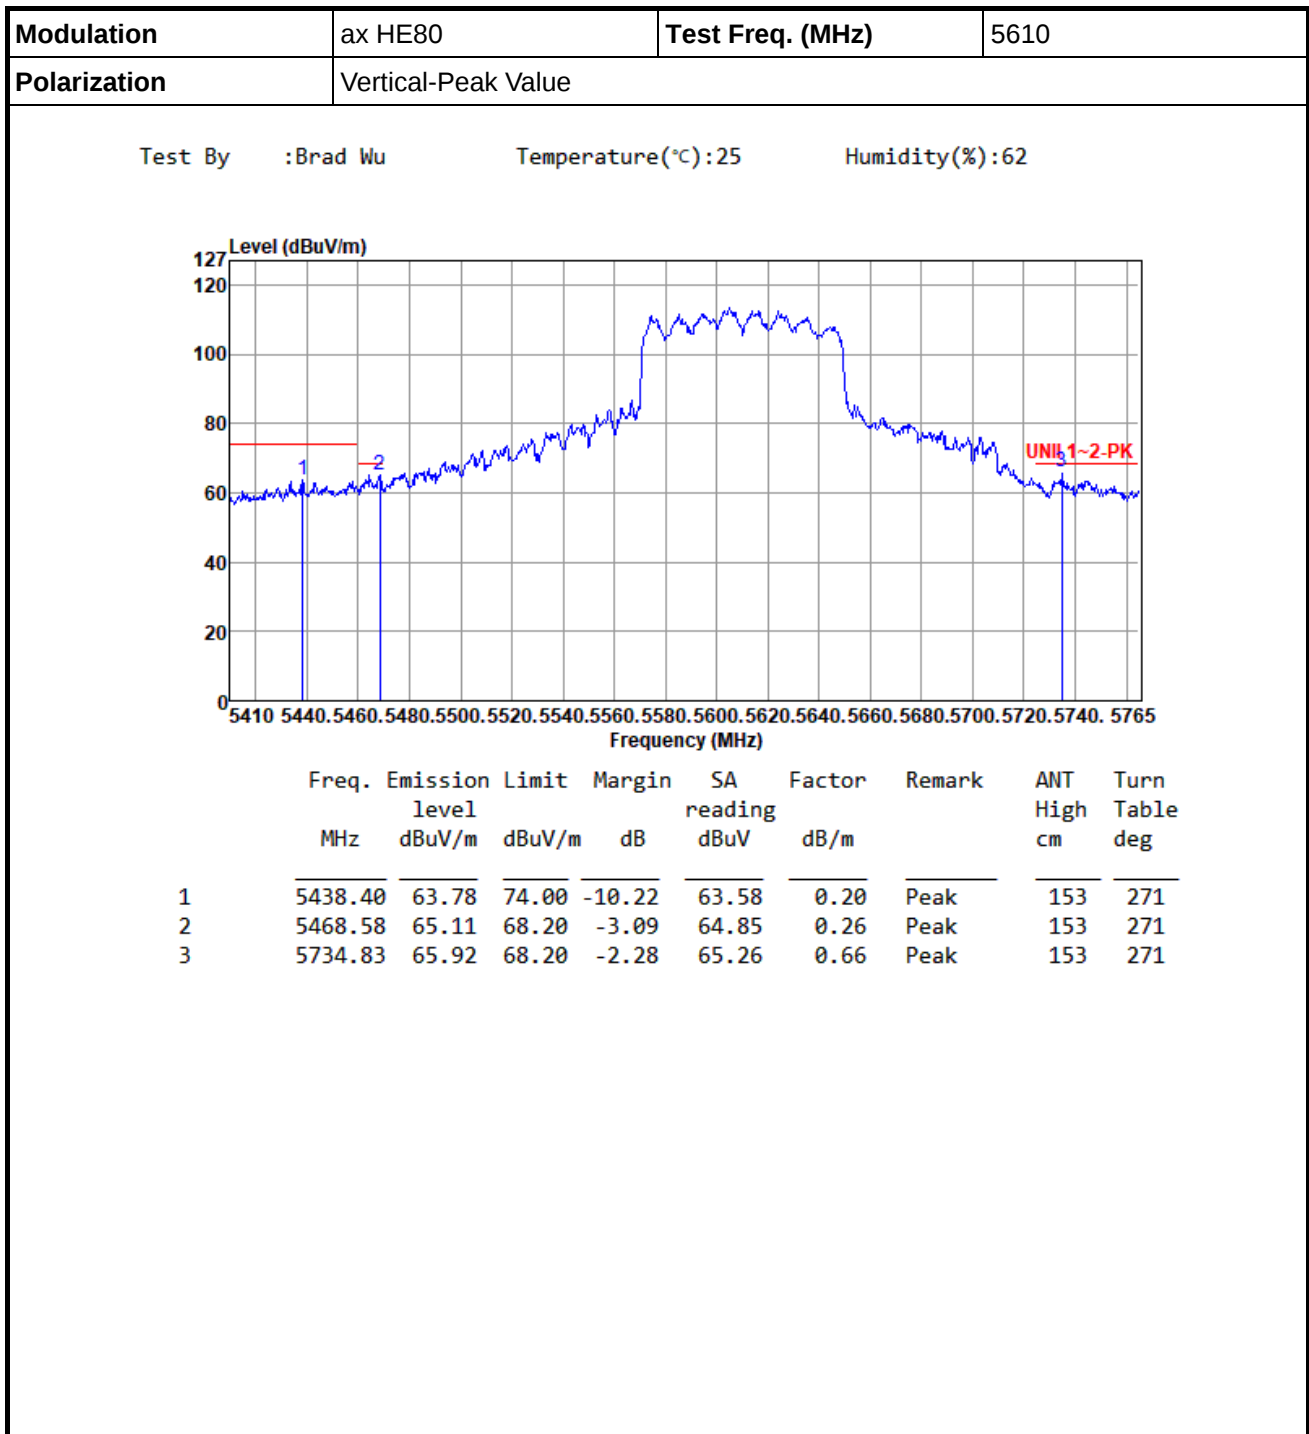


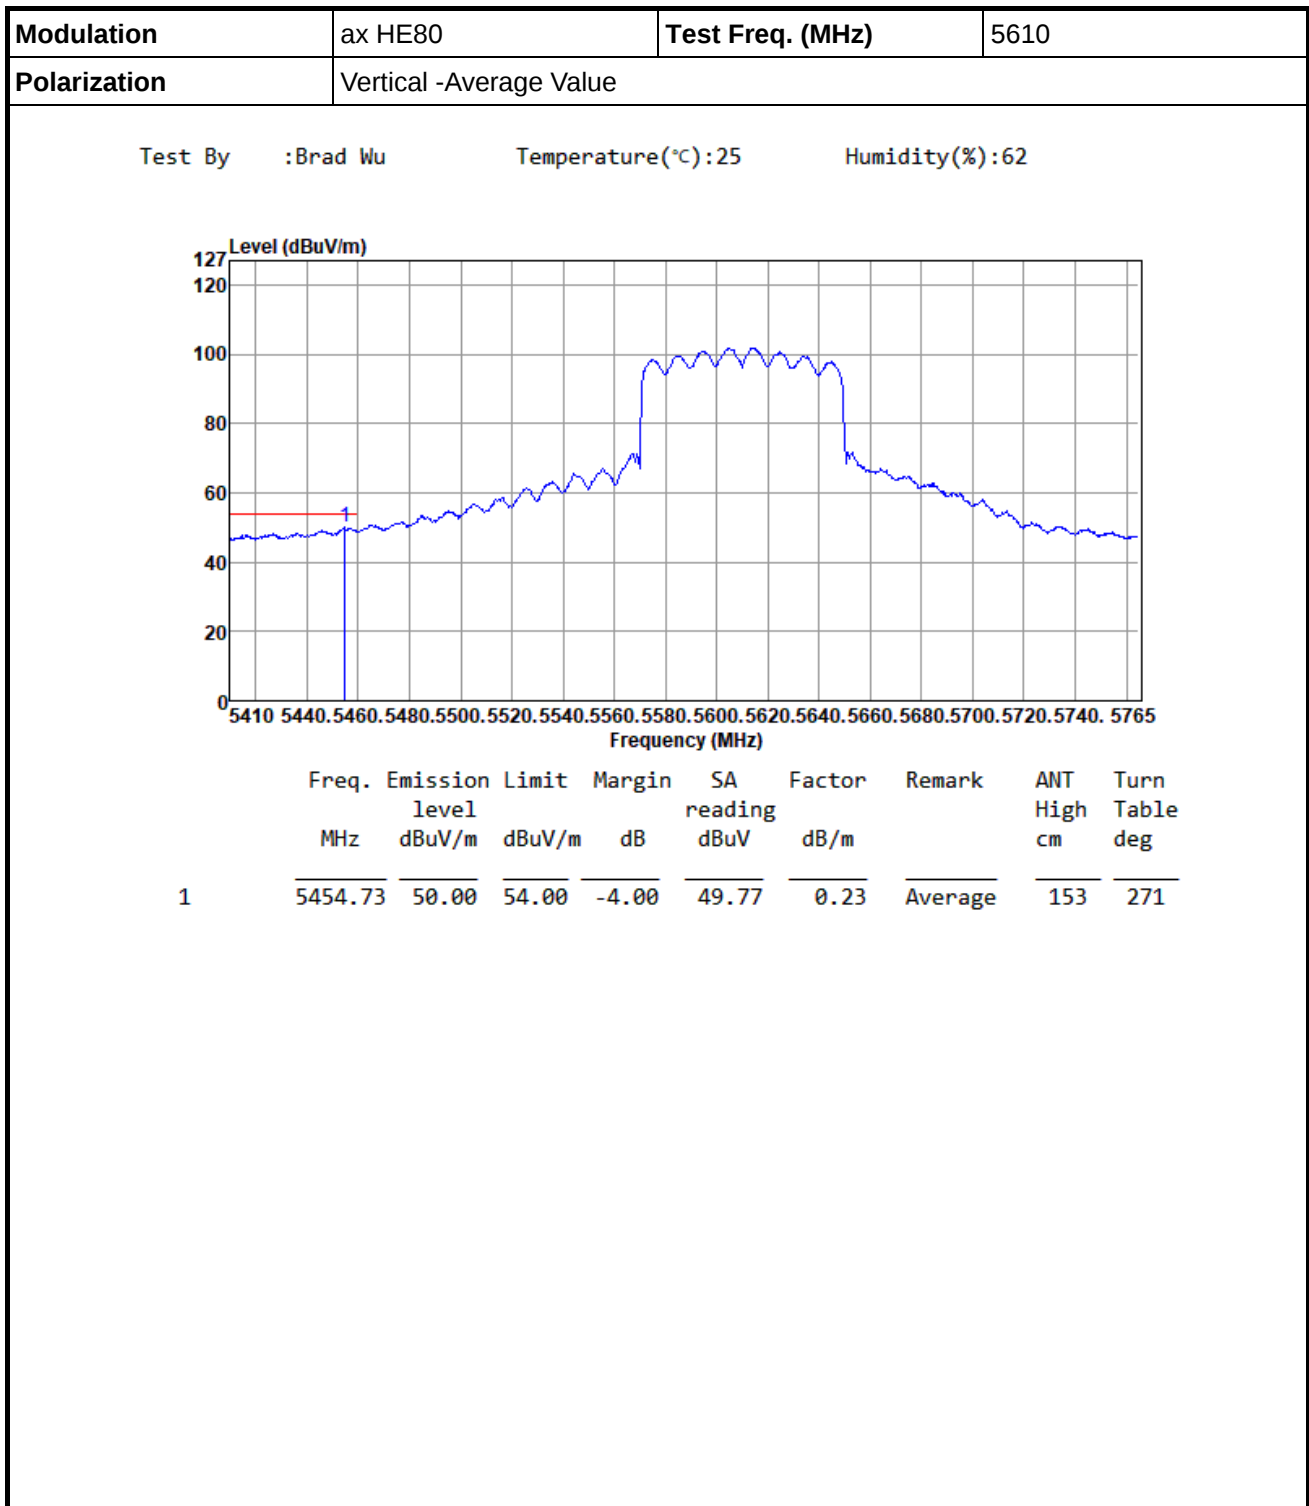


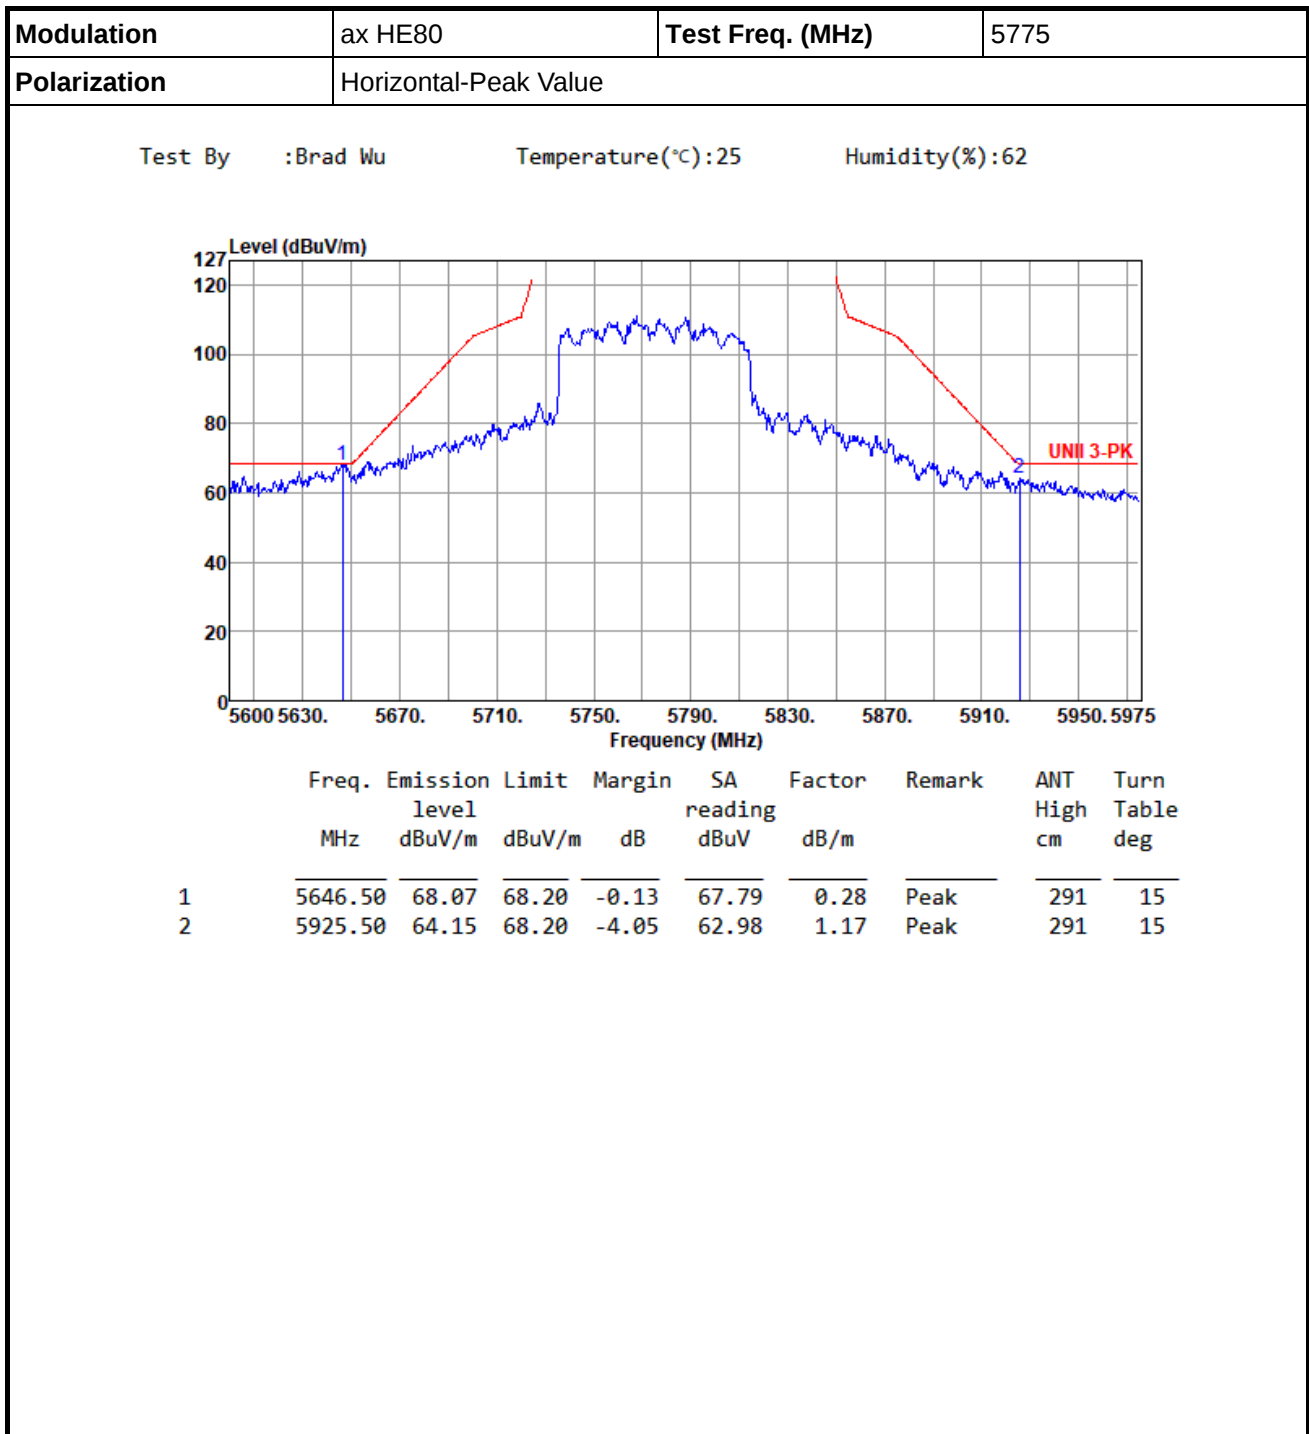


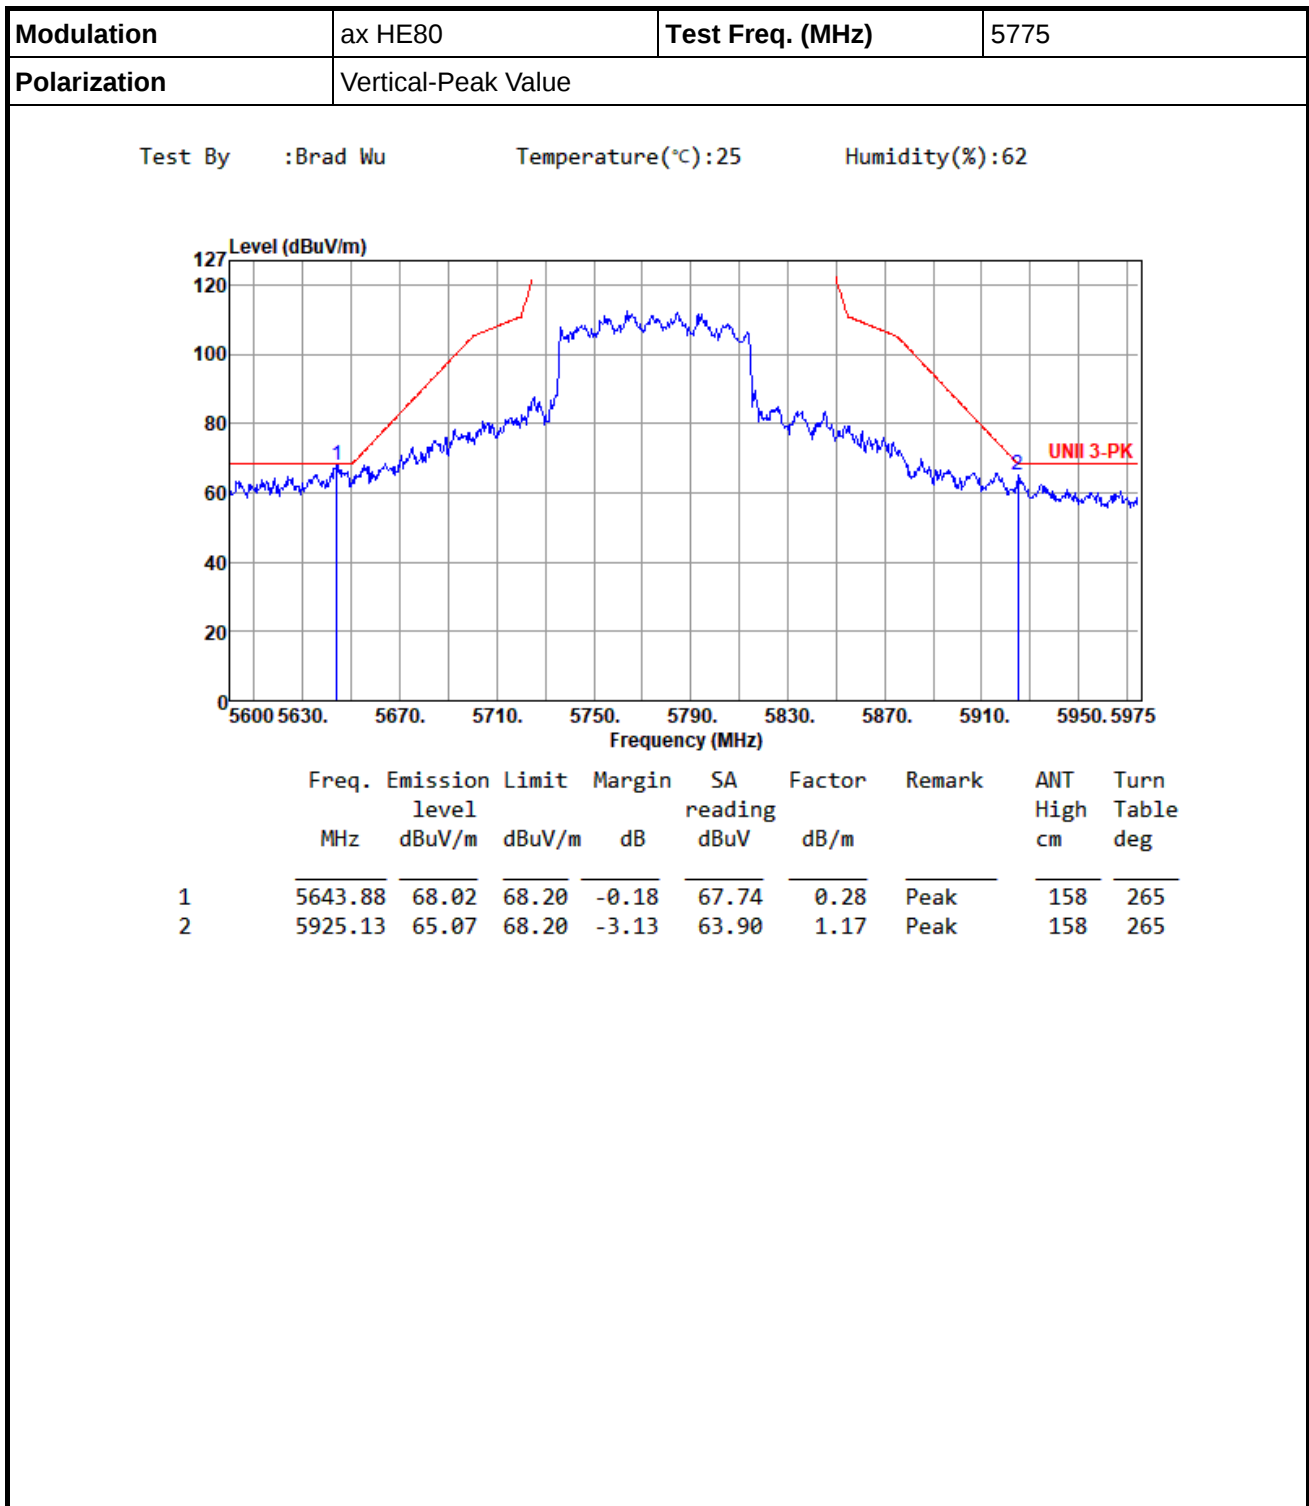


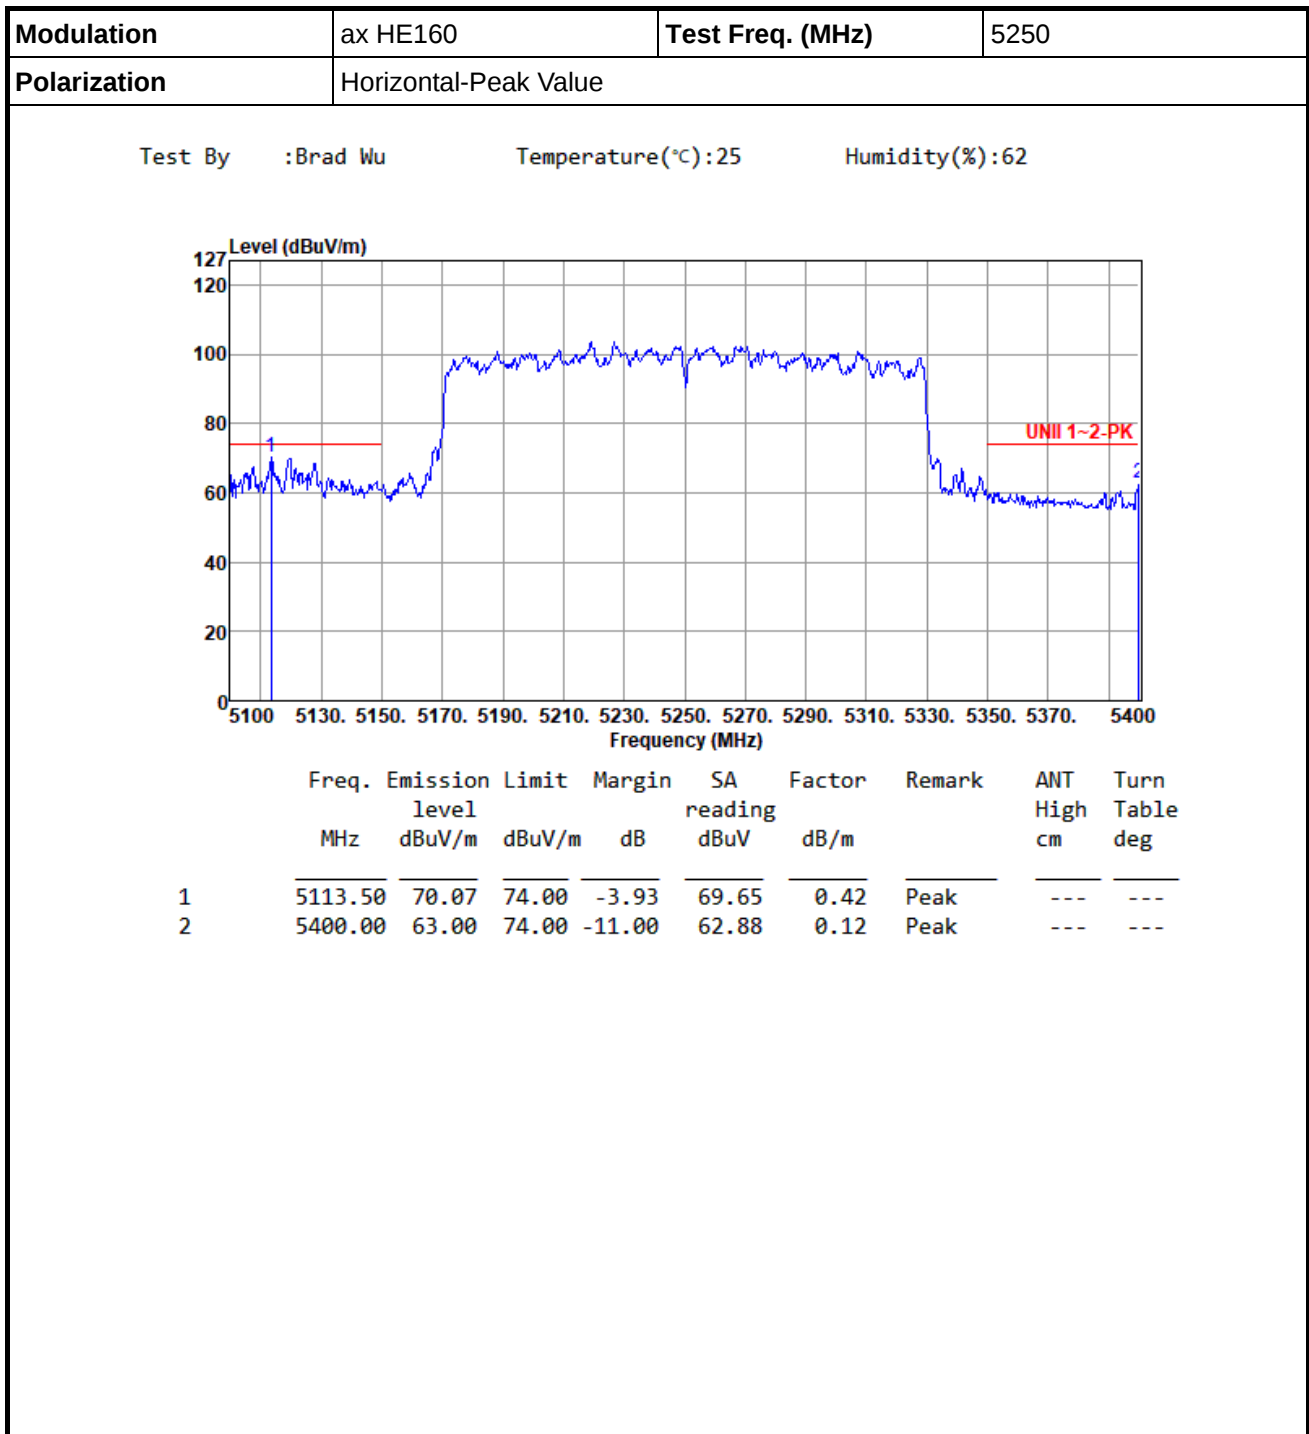


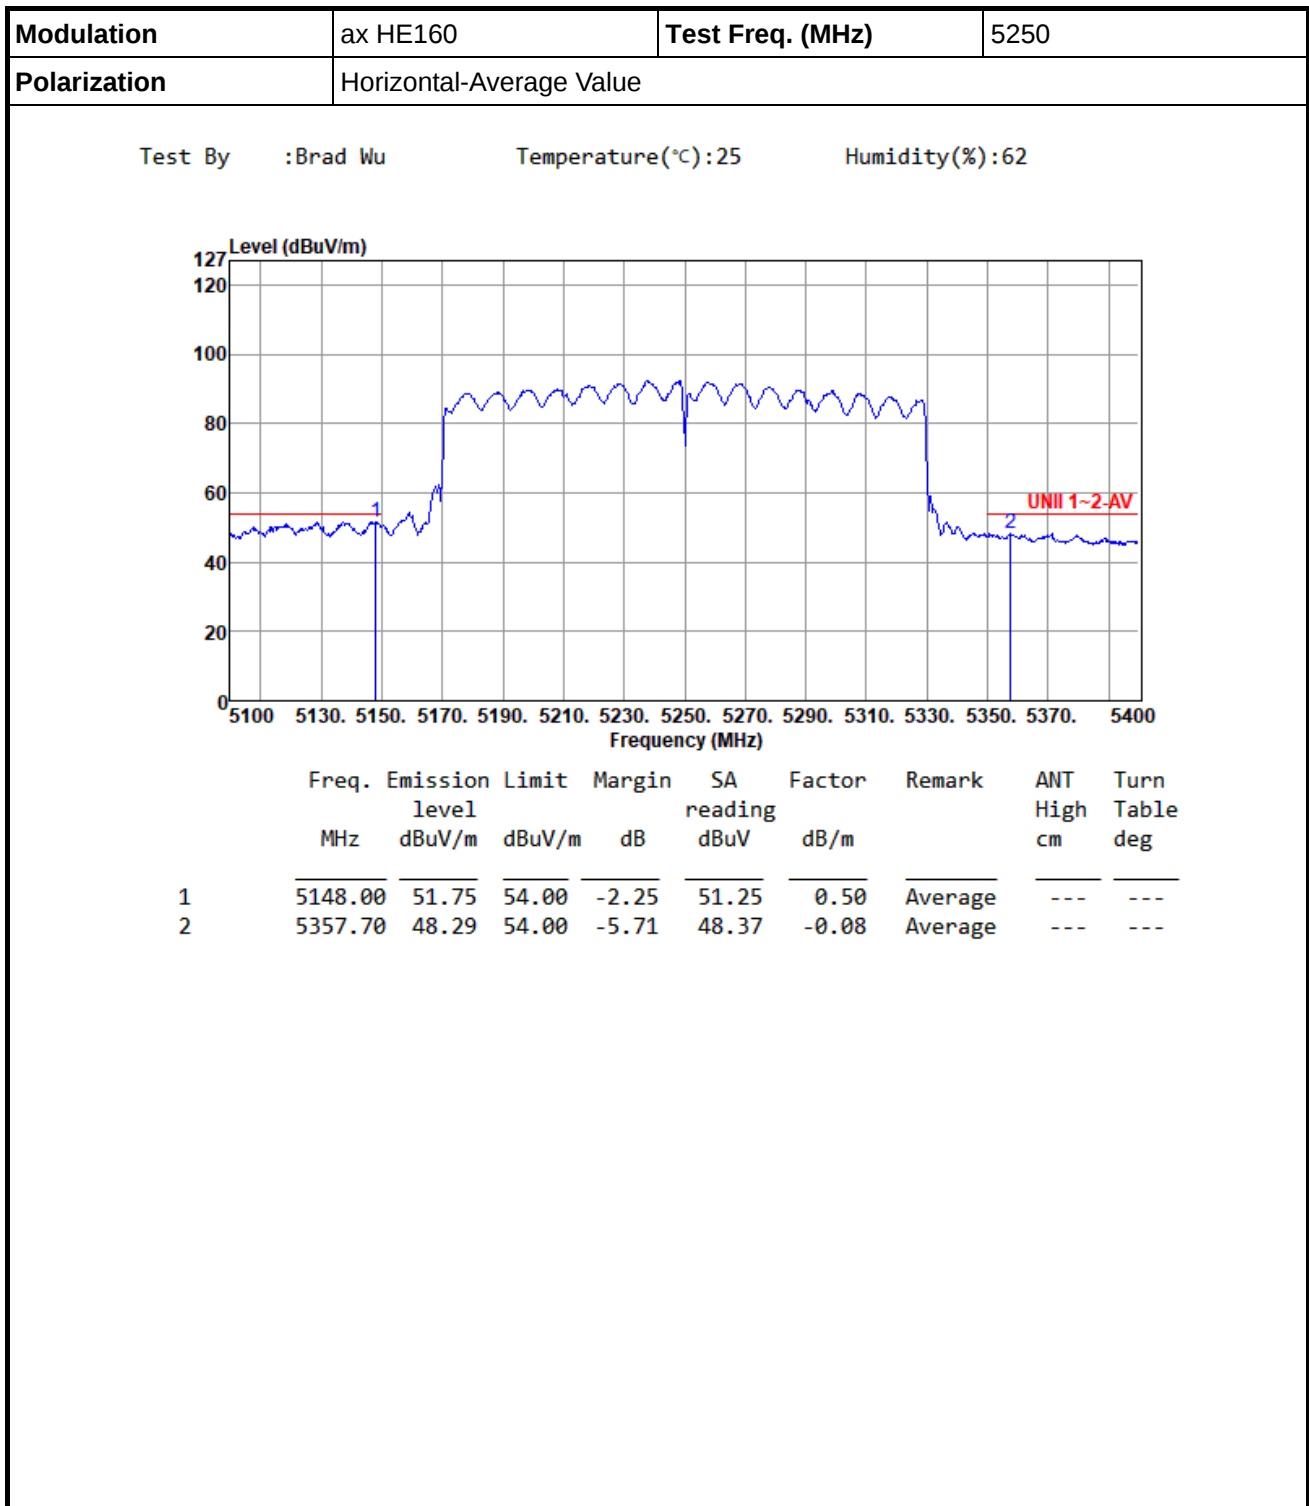


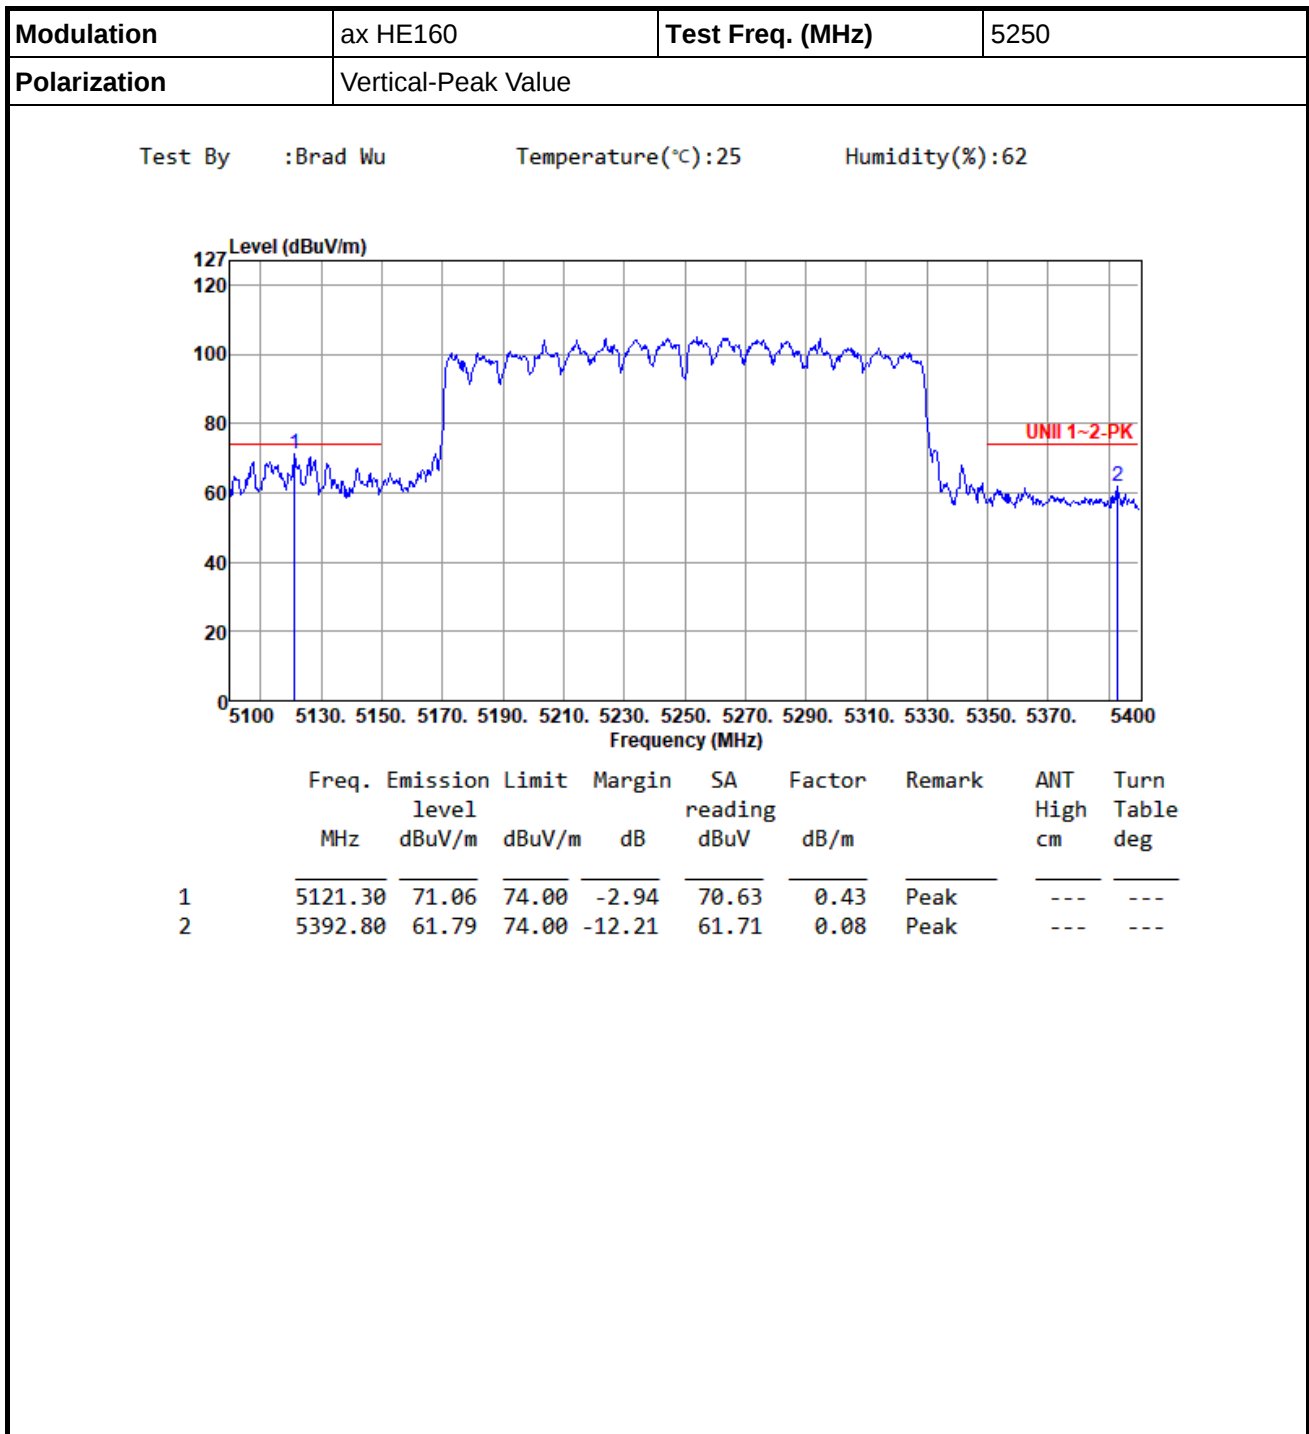


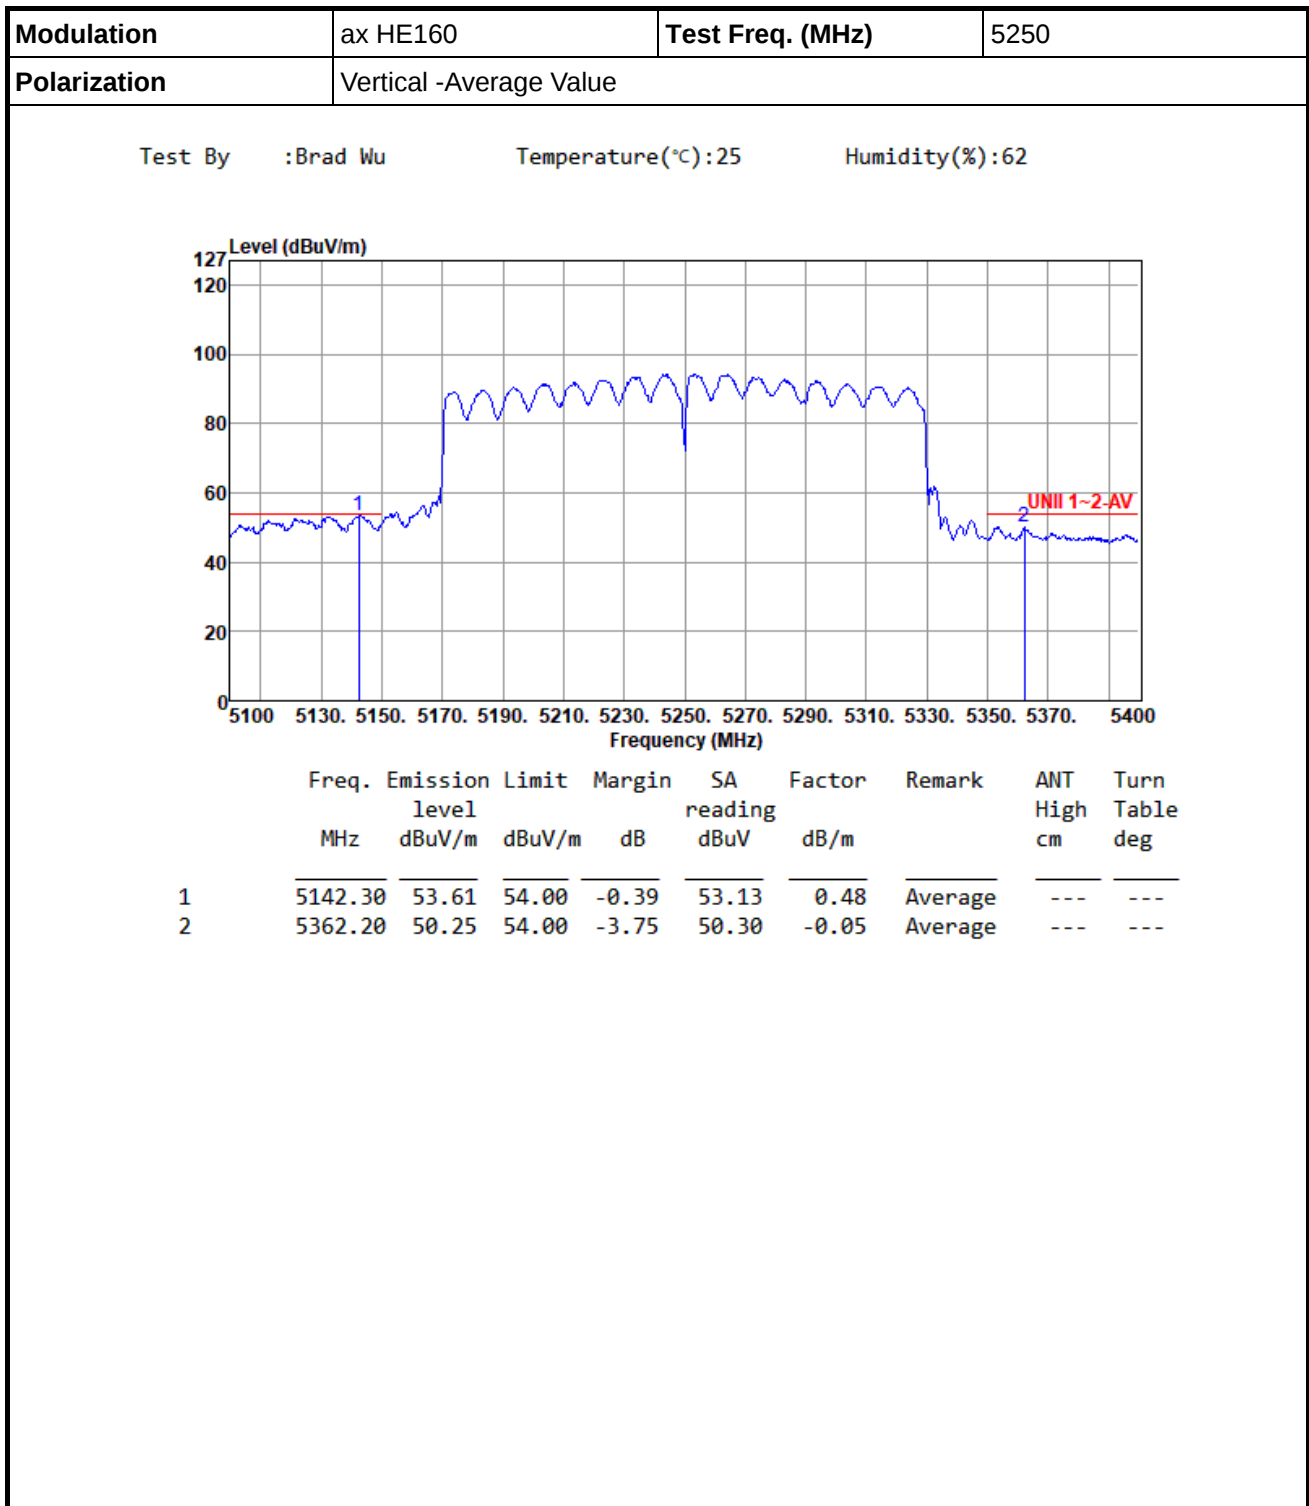

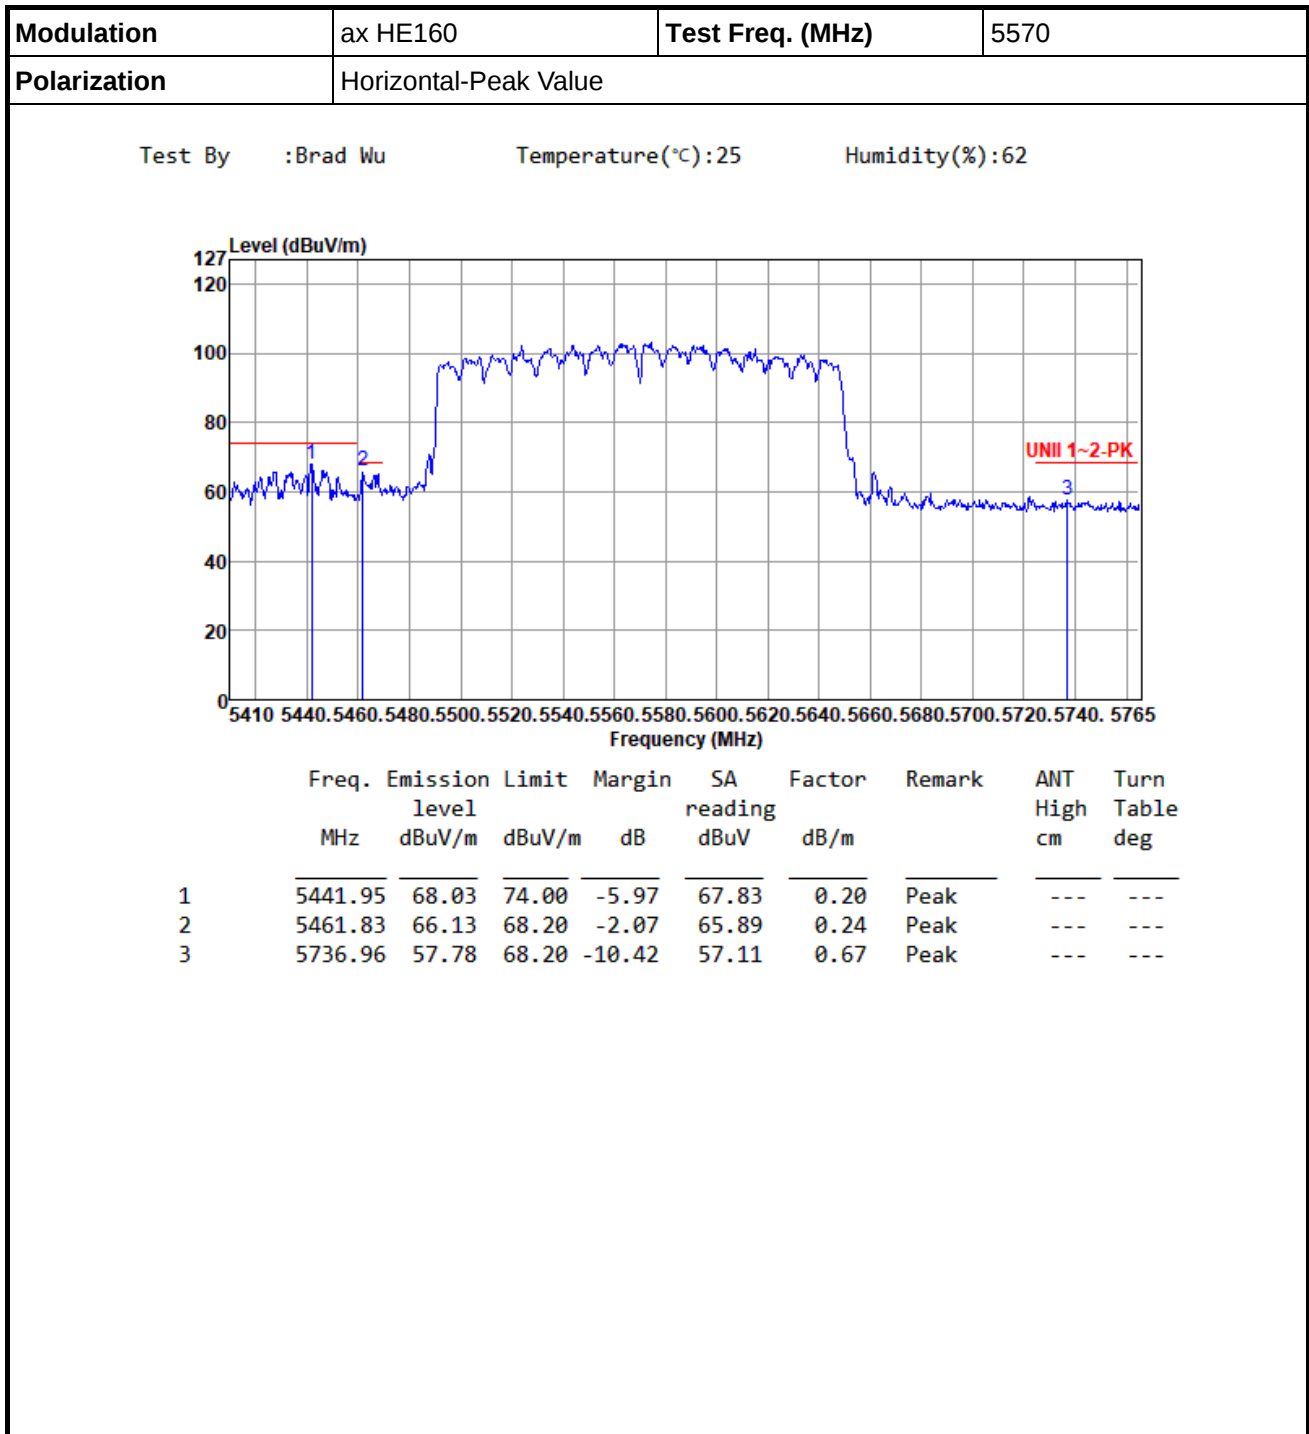

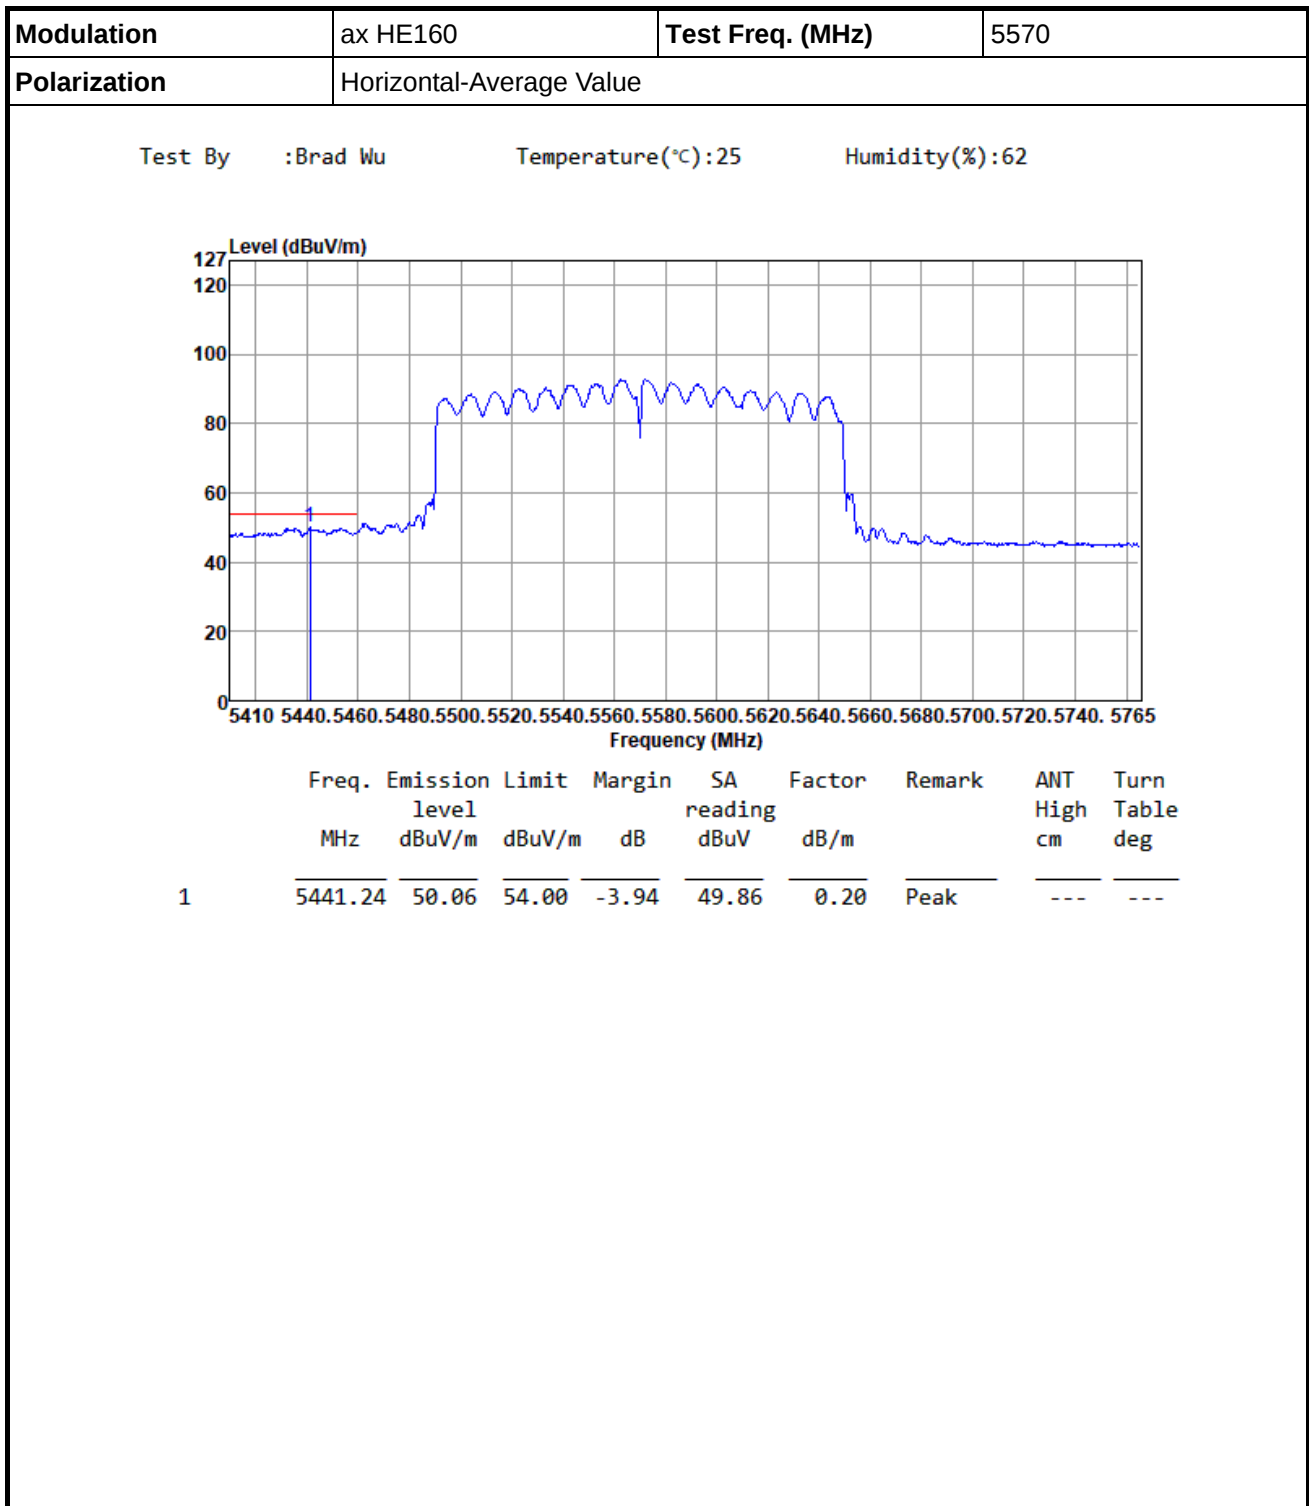

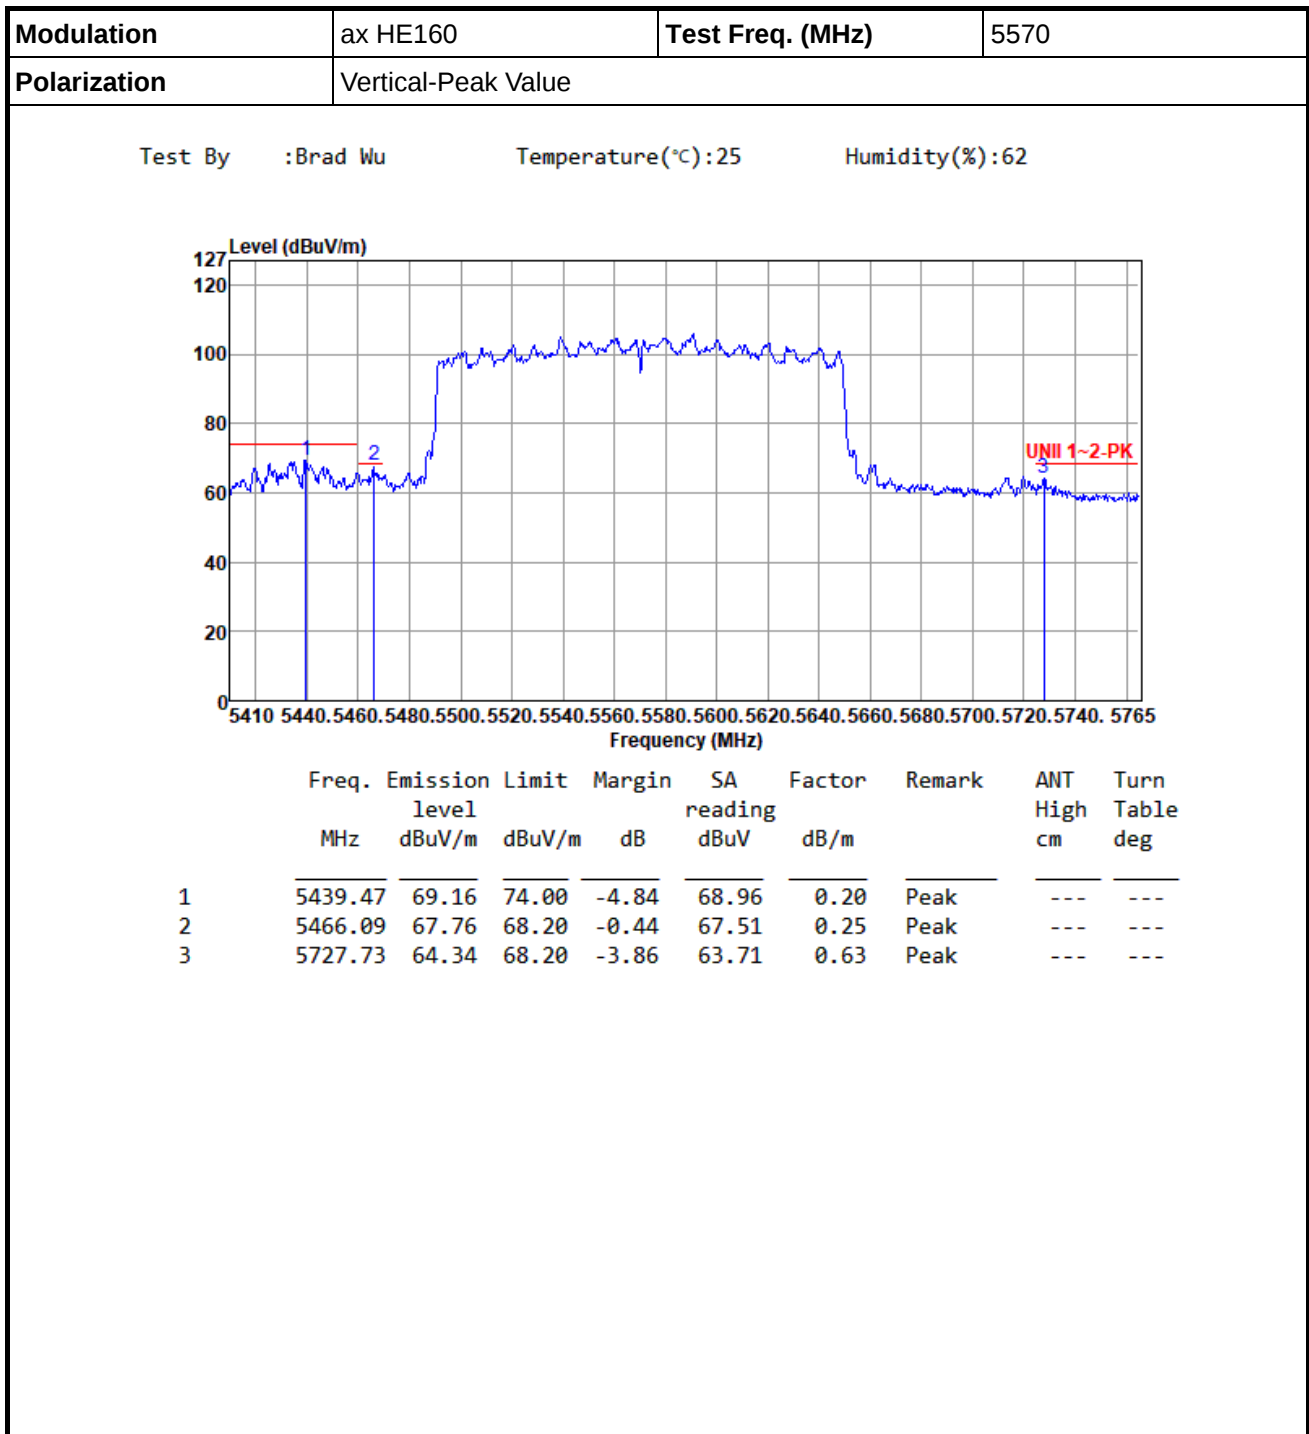

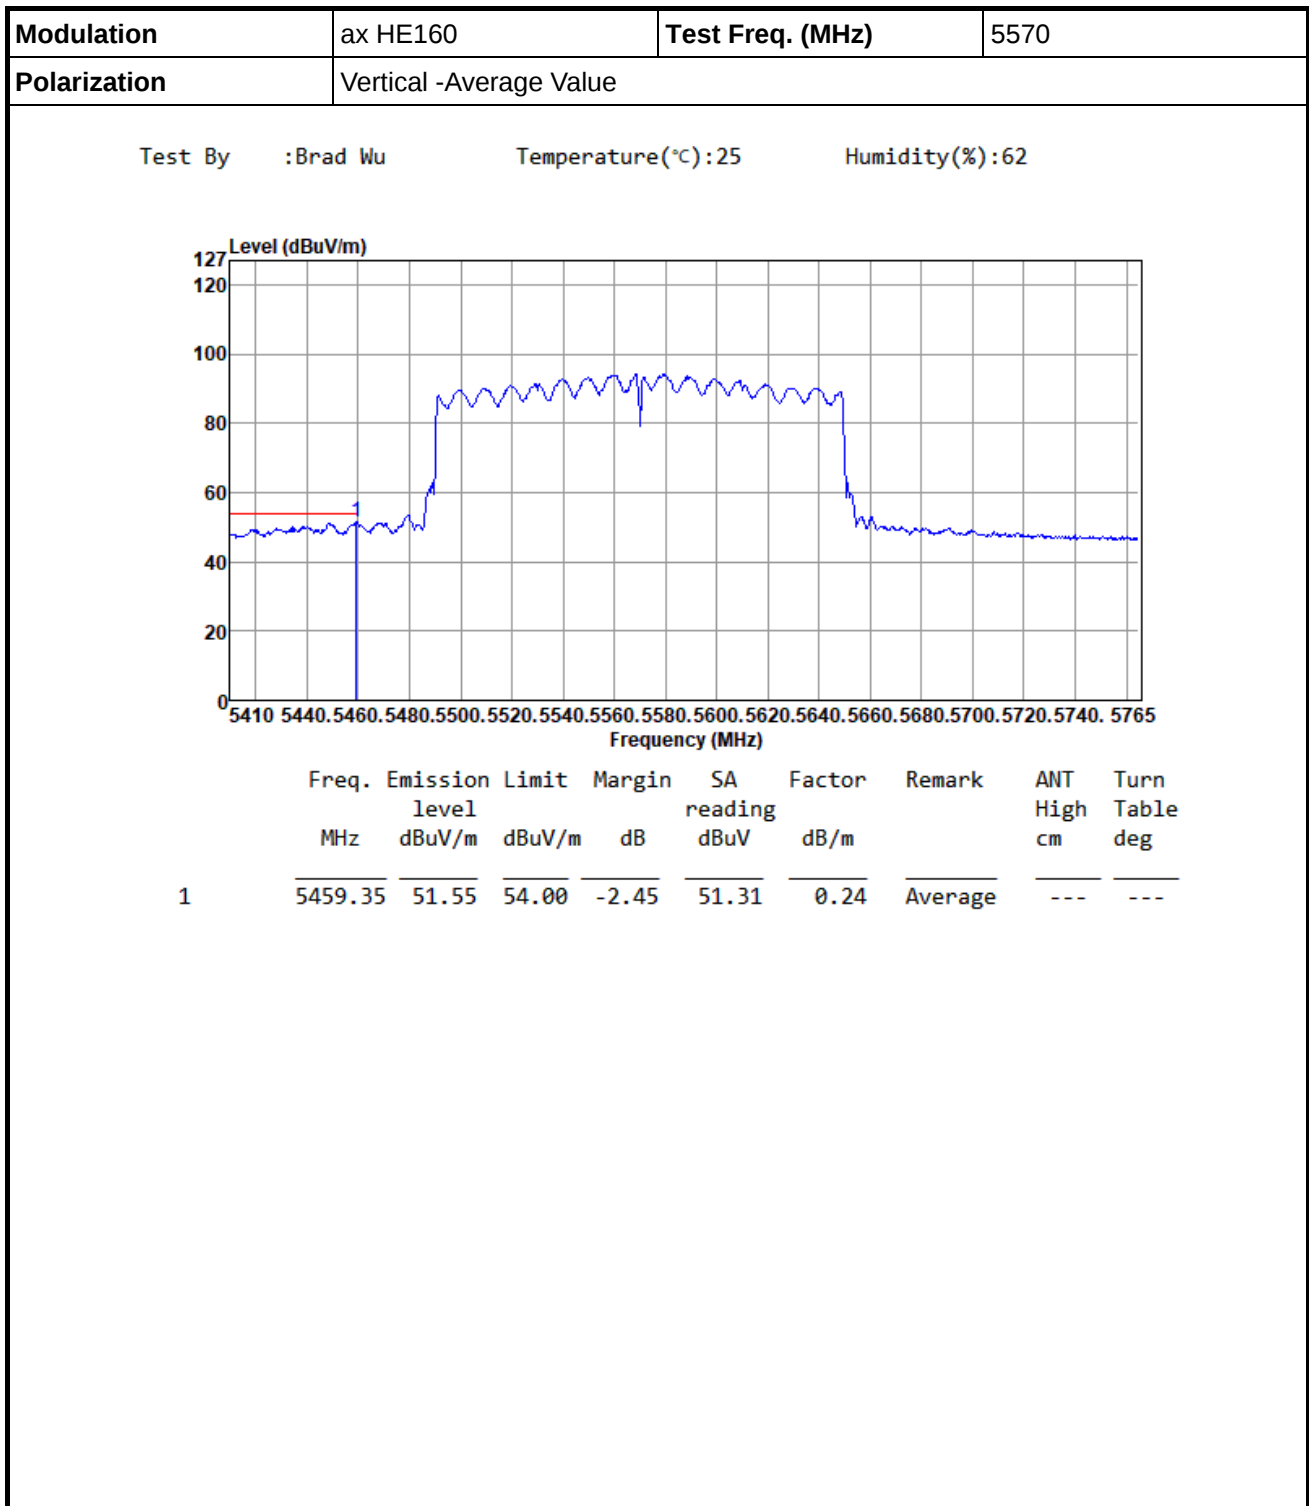



Frequency: 5300 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	-3.48	2.02	6.35	7.90
T20°C Vmin	-3.65	1.99	6.33	7.78
T40°C Vnom	-4.94	-1.24	2.17	3.40
T30°C Vnom	-4.35	-0.05	3.30	5.20
T20°C Vnom	-3.57	2.02	6.34	7.83
T10°C Vnom	5.39	4.13	3.03	2.60
T0°C Vnom	10.98	5.41	0.90	-0.60
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 40		Tmin [°C]: 0	

Frequency: 5785 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	-3.26	1.90	6.21	7.34
T20°C Vmin	-3.38	1.83	6.07	7.23
T40°C Vnom	-4.81	-1.54	1.72	3.16
T30°C Vnom	-4.11	0.15	3.62	4.89
T20°C Vnom	-3.30	1.86	6.13	7.29
T10°C Vnom	5.27	3.89	2.83	2.45
T0°C Vnom	10.16	4.83	0.91	-0.59
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 40		Tmin [°C]: 0	




Modulation Mode	11a	Test Freq. (MHz)	5200
Power Phase	Line		

Test by : Brad Wu

Temperature: 23°C

Humidity: 64%

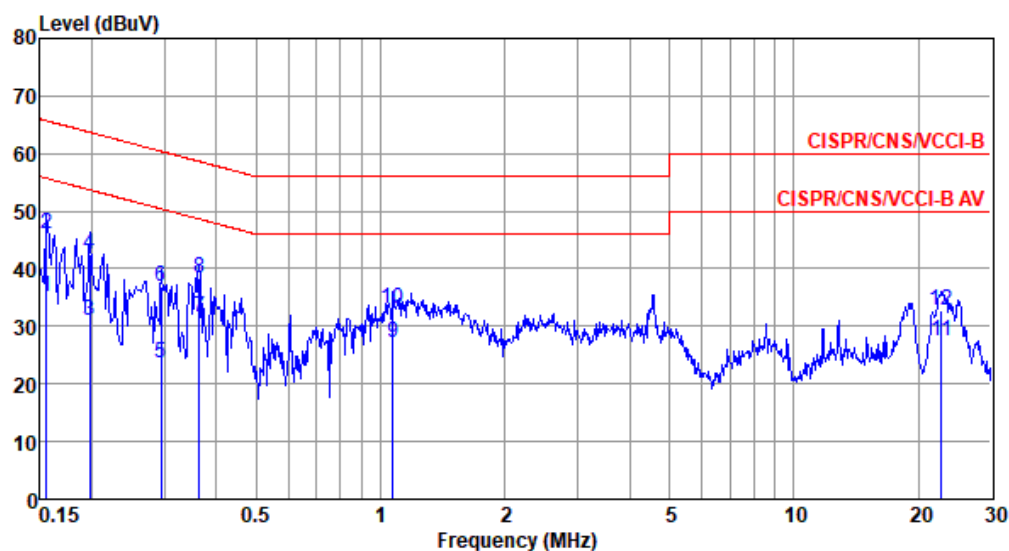

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.156	35.14	55.69	-20.55	25.19	9.65	0.08	0.22	Average
2	0.156	45.94	65.69	-19.75	35.99	9.65	0.08	0.22	QP
3	0.198	31.05	53.71	-22.66	21.07	9.64	0.08	0.26	Average
4	0.198	42.46	63.71	-21.25	32.48	9.64	0.08	0.26	QP
5	0.294	23.67	50.41	-26.74	13.65	9.64	0.09	0.29	Average
6	0.294	36.76	60.41	-23.65	26.74	9.64	0.09	0.29	QP
7*	0.363	31.50	48.65	-17.15	21.46	9.64	0.09	0.31	Average
8	0.363	38.48	58.65	-20.17	28.44	9.64	0.09	0.31	QP
9	1.071	27.08	46.00	-18.92	16.92	9.65	0.11	0.40	Average
10	1.071	33.20	56.00	-22.80	23.04	9.65	0.11	0.40	QP
11	22.775	27.52	50.00	-22.48	16.55	9.67	0.60	0.70	Average
12	22.775	32.73	60.00	-27.27	21.76	9.67	0.60	0.70	QP


Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).



Modulation Mode	11a	Test Freq. (MHz)	5200																																																																																																																																																						
Power Phase	Neutral																																																																																																																																																								
Test by : Brad Wu Temperature: 23°C Humidity: 64%																																																																																																																																																									
Level (dBUV) Frequency (MHz)																																																																																																																																																									
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Cable</th><th>Aux</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV</th><th>Line</th><th>Limit</th><th>Level</th><th>dB</th><th>loss</th><th>dB</th><th>Remark</th></tr><tr><th></th><th></th><th></th><th>dBuV</th><th>dB</th><th>dBuV</th><th></th><th>dB</th><th></th><th></th></tr><tr><td>1</td><td>0.150</td><td>37.24</td><td>56.00</td><td>-18.76</td><td>27.38</td><td>9.64</td><td>0.08</td><td>0.14</td><td>Average</td></tr><tr><td>2</td><td>0.150</td><td>47.08</td><td>66.00</td><td>-18.92</td><td>37.22</td><td>9.64</td><td>0.08</td><td>0.14</td><td>QP</td></tr><tr><td>3</td><td>0.207</td><td>33.56</td><td>53.32</td><td>-19.76</td><td>23.64</td><td>9.64</td><td>0.08</td><td>0.20</td><td>Average</td></tr><tr><td>4</td><td>0.207</td><td>43.04</td><td>63.32</td><td>-20.28</td><td>33.12</td><td>9.64</td><td>0.08</td><td>0.20</td><td>QP</td></tr><tr><td>5</td><td>0.291</td><td>25.76</td><td>50.50</td><td>-24.74</td><td>15.81</td><td>9.63</td><td>0.09</td><td>0.23</td><td>Average</td></tr><tr><td>6</td><td>0.291</td><td>38.72</td><td>60.50</td><td>-21.78</td><td>28.77</td><td>9.63</td><td>0.09</td><td>0.23</td><td>QP</td></tr><tr><td>7*</td><td>0.369</td><td>32.54</td><td>48.52</td><td>-15.98</td><td>22.57</td><td>9.63</td><td>0.09</td><td>0.25</td><td>Average</td></tr><tr><td>8</td><td>0.369</td><td>42.44</td><td>58.52</td><td>-16.08</td><td>32.47</td><td>9.63</td><td>0.09</td><td>0.25</td><td>QP</td></tr><tr><td>9</td><td>1.071</td><td>27.48</td><td>46.00</td><td>-18.52</td><td>17.37</td><td>9.64</td><td>0.11</td><td>0.36</td><td>Average</td></tr><tr><td>10</td><td>1.071</td><td>33.96</td><td>56.00</td><td>-22.04</td><td>23.85</td><td>9.64</td><td>0.11</td><td>0.36</td><td>QP</td></tr><tr><td>11</td><td>22.896</td><td>28.12</td><td>50.00</td><td>-21.88</td><td>17.06</td><td>9.79</td><td>0.61</td><td>0.66</td><td>Average</td></tr><tr><td>12</td><td>22.896</td><td>34.05</td><td>60.00</td><td>-25.95</td><td>22.99</td><td>9.79</td><td>0.61</td><td>0.66</td><td>QP</td></tr></table>					Freq	Level	Limit	Over	Read	Factor	Cable	Aux			MHz	dBuV	Line	Limit	Level	dB	loss	dB	Remark				dBuV	dB	dBuV		dB			1	0.150	37.24	56.00	-18.76	27.38	9.64	0.08	0.14	Average	2	0.150	47.08	66.00	-18.92	37.22	9.64	0.08	0.14	QP	3	0.207	33.56	53.32	-19.76	23.64	9.64	0.08	0.20	Average	4	0.207	43.04	63.32	-20.28	33.12	9.64	0.08	0.20	QP	5	0.291	25.76	50.50	-24.74	15.81	9.63	0.09	0.23	Average	6	0.291	38.72	60.50	-21.78	28.77	9.63	0.09	0.23	QP	7*	0.369	32.54	48.52	-15.98	22.57	9.63	0.09	0.25	Average	8	0.369	42.44	58.52	-16.08	32.47	9.63	0.09	0.25	QP	9	1.071	27.48	46.00	-18.52	17.37	9.64	0.11	0.36	Average	10	1.071	33.96	56.00	-22.04	23.85	9.64	0.11	0.36	QP	11	22.896	28.12	50.00	-21.88	17.06	9.79	0.61	0.66	Average	12	22.896	34.05	60.00	-25.95	22.99	9.79	0.61	0.66	QP
	Freq	Level	Limit	Over	Read	Factor	Cable	Aux																																																																																																																																																	
	MHz	dBuV	Line	Limit	Level	dB	loss	dB	Remark																																																																																																																																																
			dBuV	dB	dBuV		dB																																																																																																																																																		
1	0.150	37.24	56.00	-18.76	27.38	9.64	0.08	0.14	Average																																																																																																																																																
2	0.150	47.08	66.00	-18.92	37.22	9.64	0.08	0.14	QP																																																																																																																																																
3	0.207	33.56	53.32	-19.76	23.64	9.64	0.08	0.20	Average																																																																																																																																																
4	0.207	43.04	63.32	-20.28	33.12	9.64	0.08	0.20	QP																																																																																																																																																
5	0.291	25.76	50.50	-24.74	15.81	9.63	0.09	0.23	Average																																																																																																																																																
6	0.291	38.72	60.50	-21.78	28.77	9.63	0.09	0.23	QP																																																																																																																																																
7*	0.369	32.54	48.52	-15.98	22.57	9.63	0.09	0.25	Average																																																																																																																																																
8	0.369	42.44	58.52	-16.08	32.47	9.63	0.09	0.25	QP																																																																																																																																																
9	1.071	27.48	46.00	-18.52	17.37	9.64	0.11	0.36	Average																																																																																																																																																
10	1.071	33.96	56.00	-22.04	23.85	9.64	0.11	0.36	QP																																																																																																																																																
11	22.896	28.12	50.00	-21.88	17.06	9.79	0.61	0.66	Average																																																																																																																																																
12	22.896	34.05	60.00	-25.95	22.99	9.79	0.61	0.66	QP																																																																																																																																																
Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB). 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).																																																																																																																																																									

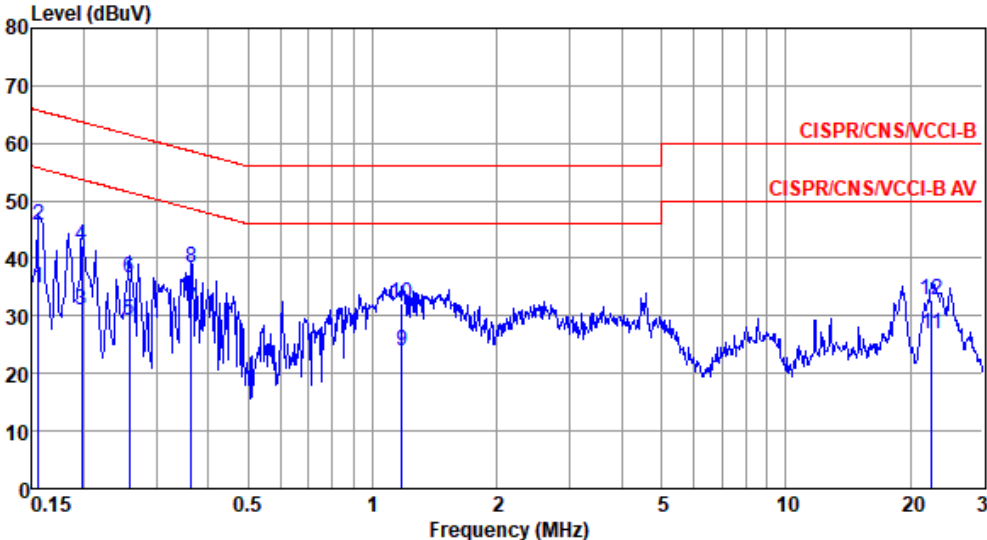

Modulation Mode	11ax HE40	Test Freq. (MHz)	5795																																																																																																																																										
Power Phase	Line																																																																																																																																												
Test by : Brad Wu Temperature: 23°C Humidity: 64%																																																																																																																																													
Level (dBUV)  <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Cable</th><th>Aux</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV</th><th>Line</th><th>Limit</th><th>Level</th><th>dB</th><th>loss</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>0.156</td><td>34.89</td><td>55.69</td><td>-20.80</td><td>24.94</td><td>9.65</td><td>0.08</td><td>0.22</td><td>Average</td></tr><tr><td>2</td><td>0.156</td><td>45.84</td><td>65.69</td><td>-19.85</td><td>35.89</td><td>9.65</td><td>0.08</td><td>0.22</td><td>QP</td></tr><tr><td>3</td><td>0.198</td><td>31.09</td><td>53.71</td><td>-22.62</td><td>21.11</td><td>9.64</td><td>0.08</td><td>0.26</td><td>Average</td></tr><tr><td>4</td><td>0.198</td><td>42.26</td><td>63.71</td><td>-21.45</td><td>32.28</td><td>9.64</td><td>0.08</td><td>0.26</td><td>QP</td></tr><tr><td>5</td><td>0.258</td><td>29.08</td><td>51.51</td><td>-22.43</td><td>19.08</td><td>9.64</td><td>0.08</td><td>0.28</td><td>Average</td></tr><tr><td>6</td><td>0.258</td><td>36.74</td><td>61.51</td><td>-24.77</td><td>26.74</td><td>9.64</td><td>0.08</td><td>0.28</td><td>QP</td></tr><tr><td>7*</td><td>0.363</td><td>31.26</td><td>48.65</td><td>-17.39</td><td>21.22</td><td>9.64</td><td>0.09</td><td>0.31</td><td>Average</td></tr><tr><td>8</td><td>0.363</td><td>38.49</td><td>58.65</td><td>-20.16</td><td>28.45</td><td>9.64</td><td>0.09</td><td>0.31</td><td>QP</td></tr><tr><td>9</td><td>1.178</td><td>23.79</td><td>46.00</td><td>-22.21</td><td>13.61</td><td>9.65</td><td>0.12</td><td>0.41</td><td>Average</td></tr><tr><td>10</td><td>1.178</td><td>32.06</td><td>56.00</td><td>-23.94</td><td>21.88</td><td>9.65</td><td>0.12</td><td>0.41</td><td>QP</td></tr><tr><td>11</td><td>22.535</td><td>26.97</td><td>50.00</td><td>-23.03</td><td>15.99</td><td>9.68</td><td>0.60</td><td>0.70</td><td>Average</td></tr><tr><td>12</td><td>22.535</td><td>32.63</td><td>60.00</td><td>-27.37</td><td>21.65</td><td>9.68</td><td>0.60</td><td>0.70</td><td>QP</td></tr></tbody></table>				Freq	Level	Limit	Over	Read	Factor	Cable	Aux	Remark	MHz	dBuV	Line	Limit	Level	dB	loss	dB		1	0.156	34.89	55.69	-20.80	24.94	9.65	0.08	0.22	Average	2	0.156	45.84	65.69	-19.85	35.89	9.65	0.08	0.22	QP	3	0.198	31.09	53.71	-22.62	21.11	9.64	0.08	0.26	Average	4	0.198	42.26	63.71	-21.45	32.28	9.64	0.08	0.26	QP	5	0.258	29.08	51.51	-22.43	19.08	9.64	0.08	0.28	Average	6	0.258	36.74	61.51	-24.77	26.74	9.64	0.08	0.28	QP	7*	0.363	31.26	48.65	-17.39	21.22	9.64	0.09	0.31	Average	8	0.363	38.49	58.65	-20.16	28.45	9.64	0.09	0.31	QP	9	1.178	23.79	46.00	-22.21	13.61	9.65	0.12	0.41	Average	10	1.178	32.06	56.00	-23.94	21.88	9.65	0.12	0.41	QP	11	22.535	26.97	50.00	-23.03	15.99	9.68	0.60	0.70	Average	12	22.535	32.63	60.00	-27.37	21.65	9.68	0.60	0.70	QP
Freq	Level	Limit	Over	Read	Factor	Cable	Aux	Remark																																																																																																																																					
MHz	dBuV	Line	Limit	Level	dB	loss	dB																																																																																																																																						
1	0.156	34.89	55.69	-20.80	24.94	9.65	0.08	0.22	Average																																																																																																																																				
2	0.156	45.84	65.69	-19.85	35.89	9.65	0.08	0.22	QP																																																																																																																																				
3	0.198	31.09	53.71	-22.62	21.11	9.64	0.08	0.26	Average																																																																																																																																				
4	0.198	42.26	63.71	-21.45	32.28	9.64	0.08	0.26	QP																																																																																																																																				
5	0.258	29.08	51.51	-22.43	19.08	9.64	0.08	0.28	Average																																																																																																																																				
6	0.258	36.74	61.51	-24.77	26.74	9.64	0.08	0.28	QP																																																																																																																																				
7*	0.363	31.26	48.65	-17.39	21.22	9.64	0.09	0.31	Average																																																																																																																																				
8	0.363	38.49	58.65	-20.16	28.45	9.64	0.09	0.31	QP																																																																																																																																				
9	1.178	23.79	46.00	-22.21	13.61	9.65	0.12	0.41	Average																																																																																																																																				
10	1.178	32.06	56.00	-23.94	21.88	9.65	0.12	0.41	QP																																																																																																																																				
11	22.535	26.97	50.00	-23.03	15.99	9.68	0.60	0.70	Average																																																																																																																																				
12	22.535	32.63	60.00	-27.37	21.65	9.68	0.60	0.70	QP																																																																																																																																				
Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB). 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).																																																																																																																																													



Modulation Mode	11ax HE40	Test Freq. (MHz)	5795																																																																																																																																		
Power Phase	Neutral																																																																																																																																				
Test by : Brad Wu Temperature: 23°C Humidity: 64%																																																																																																																																					
Level (dBuV) <table><thead><tr><th></th><th>Freq MHz</th><th>Level dBuV</th><th>Limit Line dBuV</th><th>Over Limit dB</th><th>Read Level dBuV</th><th>Factor dB</th><th>Cable loss dB</th><th>Aux dB</th><th>Remark</th></tr></thead><tbody><tr><td>1</td><td>0.159</td><td>33.83</td><td>55.52</td><td>-21.69</td><td>23.96</td><td>9.64</td><td>0.08</td><td>0.15</td><td>Average</td></tr><tr><td>2</td><td>0.159</td><td>44.70</td><td>65.52</td><td>-20.82</td><td>34.83</td><td>9.64</td><td>0.08</td><td>0.15</td><td>QP</td></tr><tr><td>3</td><td>0.201</td><td>34.39</td><td>53.58</td><td>-19.19</td><td>24.47</td><td>9.64</td><td>0.08</td><td>0.20</td><td>Average</td></tr><tr><td>4</td><td>0.201</td><td>42.92</td><td>63.58</td><td>-20.66</td><td>33.00</td><td>9.64</td><td>0.08</td><td>0.20</td><td>QP</td></tr><tr><td>5</td><td>0.300</td><td>30.92</td><td>50.24</td><td>-19.32</td><td>20.97</td><td>9.63</td><td>0.09</td><td>0.23</td><td>Average</td></tr><tr><td>6</td><td>0.300</td><td>39.94</td><td>60.24</td><td>-20.30</td><td>29.99</td><td>9.63</td><td>0.09</td><td>0.23</td><td>QP</td></tr><tr><td>7*</td><td>0.363</td><td>33.54</td><td>48.65</td><td>-15.11</td><td>23.57</td><td>9.63</td><td>0.09</td><td>0.25</td><td>Average</td></tr><tr><td>8</td><td>0.363</td><td>41.18</td><td>58.65</td><td>-17.47</td><td>31.21</td><td>9.63</td><td>0.09</td><td>0.25</td><td>QP</td></tr><tr><td>9</td><td>0.974</td><td>25.72</td><td>46.00</td><td>-20.28</td><td>15.63</td><td>9.64</td><td>0.10</td><td>0.35</td><td>Average</td></tr><tr><td>10</td><td>0.974</td><td>33.25</td><td>56.00</td><td>-22.75</td><td>23.16</td><td>9.64</td><td>0.10</td><td>0.35</td><td>QP</td></tr><tr><td>11</td><td>22.655</td><td>27.60</td><td>50.00</td><td>-22.40</td><td>16.55</td><td>9.79</td><td>0.60</td><td>0.66</td><td>Average</td></tr><tr><td>12</td><td>22.655</td><td>32.90</td><td>60.00</td><td>-27.10</td><td>21.85</td><td>9.79</td><td>0.60</td><td>0.66</td><td>QP</td></tr></tbody></table>					Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark	1	0.159	33.83	55.52	-21.69	23.96	9.64	0.08	0.15	Average	2	0.159	44.70	65.52	-20.82	34.83	9.64	0.08	0.15	QP	3	0.201	34.39	53.58	-19.19	24.47	9.64	0.08	0.20	Average	4	0.201	42.92	63.58	-20.66	33.00	9.64	0.08	0.20	QP	5	0.300	30.92	50.24	-19.32	20.97	9.63	0.09	0.23	Average	6	0.300	39.94	60.24	-20.30	29.99	9.63	0.09	0.23	QP	7*	0.363	33.54	48.65	-15.11	23.57	9.63	0.09	0.25	Average	8	0.363	41.18	58.65	-17.47	31.21	9.63	0.09	0.25	QP	9	0.974	25.72	46.00	-20.28	15.63	9.64	0.10	0.35	Average	10	0.974	33.25	56.00	-22.75	23.16	9.64	0.10	0.35	QP	11	22.655	27.60	50.00	-22.40	16.55	9.79	0.60	0.66	Average	12	22.655	32.90	60.00	-27.10	21.85	9.79	0.60	0.66	QP
	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark																																																																																																																												
1	0.159	33.83	55.52	-21.69	23.96	9.64	0.08	0.15	Average																																																																																																																												
2	0.159	44.70	65.52	-20.82	34.83	9.64	0.08	0.15	QP																																																																																																																												
3	0.201	34.39	53.58	-19.19	24.47	9.64	0.08	0.20	Average																																																																																																																												
4	0.201	42.92	63.58	-20.66	33.00	9.64	0.08	0.20	QP																																																																																																																												
5	0.300	30.92	50.24	-19.32	20.97	9.63	0.09	0.23	Average																																																																																																																												
6	0.300	39.94	60.24	-20.30	29.99	9.63	0.09	0.23	QP																																																																																																																												
7*	0.363	33.54	48.65	-15.11	23.57	9.63	0.09	0.25	Average																																																																																																																												
8	0.363	41.18	58.65	-17.47	31.21	9.63	0.09	0.25	QP																																																																																																																												
9	0.974	25.72	46.00	-20.28	15.63	9.64	0.10	0.35	Average																																																																																																																												
10	0.974	33.25	56.00	-22.75	23.16	9.64	0.10	0.35	QP																																																																																																																												
11	22.655	27.60	50.00	-22.40	16.55	9.79	0.60	0.66	Average																																																																																																																												
12	22.655	32.90	60.00	-27.10	21.85	9.79	0.60	0.66	QP																																																																																																																												
Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB). 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).																																																																																																																																					