



FCC CFR47 PART 22 SUBPART H
FCC CFR47 PART 24 SUBPART E

CERTIFICATION TEST REPORT

FOR

CDMA Phone

MODEL NUMBER: LG109C

FCC ID: ZNF109C

REPORT NUMBER: 15I20516-E1

ISSUE DATE: MAY 8, 2015

Prepared for

LG ELECTRONICS MOBILECOMM U.S.A., INC
1000 SYLVAN AVENUE
ENGLEWOOD CLIFFS,
NEW JERSEY, 07632, U.S.A

Prepared by

UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	05/8/15	Initial Issue	D. Corona

TABLE OF CONTENTS

1.	ATTESTATION OF TEST RESULTS	5
2.	TEST METHODOLOGY	6
3.	FACILITIES AND ACCREDITATION	6
4.	CALIBRATION AND UNCERTAINTY	6
4.1.	MEASURING INSTRUMENT CALIBRATION	6
4.2.	SAMPLE CALCULATION	6
4.3.	MEASUREMENT UNCERTAINTY	7
5.	EQUIPMENT UNDER TEST	8
5.1.	DESCRIPTION OF EUT	8
5.2.	MAXIMUM OUTPUT POWER.....	8
5.3.	DESCRIPTION OF AVAILABLE ANTENNAS	9
5.4.	DESCRIPTION OF TEST SETUP.....	10
6.	TEST AND MEASUREMENT EQUIPMENT	13
7.	SUMMARY TABLE	14
8.	RF POWER OUTPUT VERIFICATION.....	15
8.1.	CDMA2000	15
8.1.1.	1xRTT	15
8.1.2.	CDMA2000 OUTPUT POWER RESULT	16
9.	PEAK TO AVERAGE RATIO	17
9.1.	CONDUCTED PEAK TO AVERAGE RESULT	18
10.	LIMITS AND CONDUCTED RESULTS	19
10.1.	OCCUPIED BANDWIDTH	19
10.1.1.	OCCUPIED BANDWIDTH RESULTS.....	20
10.1.1.	OCCUPIED BANDWIDTH PLOTS	21
10.2.	BAND EDGE EMISSIONS	22
10.2.1.	BAND EDGE PLOTS	23
10.3.	OUT OF BAND EMISSIONS	24
10.3.1.	OUT OF BAND EMISSIONS RESULT	25
10.3.2.	OUT OF BAND EMISSIONS PLOTS.....	26
10.4.	FREQUENCY STABILITY	27
10.4.1.	FREQUENCY STABILITY RESULTS.....	28
11.	RADIATED TEST RESULTS	30

11.1.	<i>RADIATED POWER (ERP & EIRP)</i>	30
11.1.1.	ERP/EIRP RESULTS	31
11.1.2.	LTE ERP/EIRP RESULTS.....	32
11.2.	<i>FIELD STRENGTH OF SPURIOUS RADIATION</i>	34
11.2.1.	SPURIOUS RADIATION PLOTS.....	35
12.	SETUP PHOTOS	37

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: LG ELECTRONICS MOBILECOMM U.S.A., INC
EUT DESCRIPTION: CDMA Phone
MODEL: LG109C
SERIAL NUMBER: 504CQVV0000183 (Conducted), 504CQRN0000182 (Radiated)
DATE TESTED: APRIL 21-27, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22H and 24E	PASS

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.


Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



DAN CORONIA
CONSUMER TECHNOLOGY DIVISION
WISE PROJECT LEAD
UL VERIFICATION SERVICES INC

Tested By:



OREN STOELTING
CONSUMER TECHNOLOGY DIVISION
WISE LAB EMC TECHNICIAN
UL VERIFICATION SERVICES INC

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-C, FCC CFR 47 Part 22, FCC CFR Part 24.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☒ Chamber A(IC: 2324B-1)	☐ Chamber D(IC: 2324B-4)
☐ Chamber B(IC: 2324B-2)	☐ Chamber E(IC: 2324B-5)
☐ Chamber C(IC: 2324B-3)	☐ Chamber F(IC: 2324B-6)
	☐ Chamber G(IC: 2324B-7)
	☐ Chamber H(IC: 2324B-8)

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

EIRP = PSA reading with EUT worst orientation (dBm) + Path loss (dB) – cable loss(
between the SG and substitution antenna) + Substitution Antenna Factor (dBi)

ERP = PSA reading with EUT worst orientation (dBm) + Path loss (dB) – cable loss(
between the SG and substitution antenna)

(Path loss = Signal generator output – PSA reading with substitution antenna)

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB
Radiated Disturbance, 1GHz to 40GHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a CDMA Phone

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted and radiated ERP / EIRP output powers as follows:

FCC Part 22/24						
Band	Frequency Range(MHz)	Modulation Peak	Conducted		Radiated	
			dBm	mW	dBm	mW
BC0	824~849	1xRTT	24.7	295.12	22.33	171.00
	824~849	EVDO REL. 0				
	824~849	EVDO REV. A				
BC1	1850~1910	1xRTT	25.3	338.84	23.68	233.35
	1850~1910	EVDO REL. 0				
	1850~1910	EVDO REV. A				

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PIFA antenna for the [List the bands supported] with a maximum peak gain as follow:

Frequency (MHz)	Peak Gain (dBi)
BC0, 824~849MHz	-1.4
BC1, 1850~1910MHz	2.9

5.4. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	LG	MCS-02WP	RB4Y2618606	N/A
Headset	LG	N/A	N/A	N/A

I/O CABLES (CONDUCTED SETUP)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF Out	1	Spectrum Analyzer	Shielded	None	NA
2	Antenna Port	1	EUT	Shielded	0.1m	NA
3	RF In/Out	1	Communication Test Set	Shielded	1m	NA


I/O CABLES (RADIATED SETUP)

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	USB	1	AC Adapter	Un-shielded	1.2m	NA
2	Jack	1	Headset	Shielded	1m	NA
3	RF In/out	1	Communication Test Set	Un-shielded	2m	NA


TEST SETUP

The EUT is continuously communicated to the call box during the tests.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

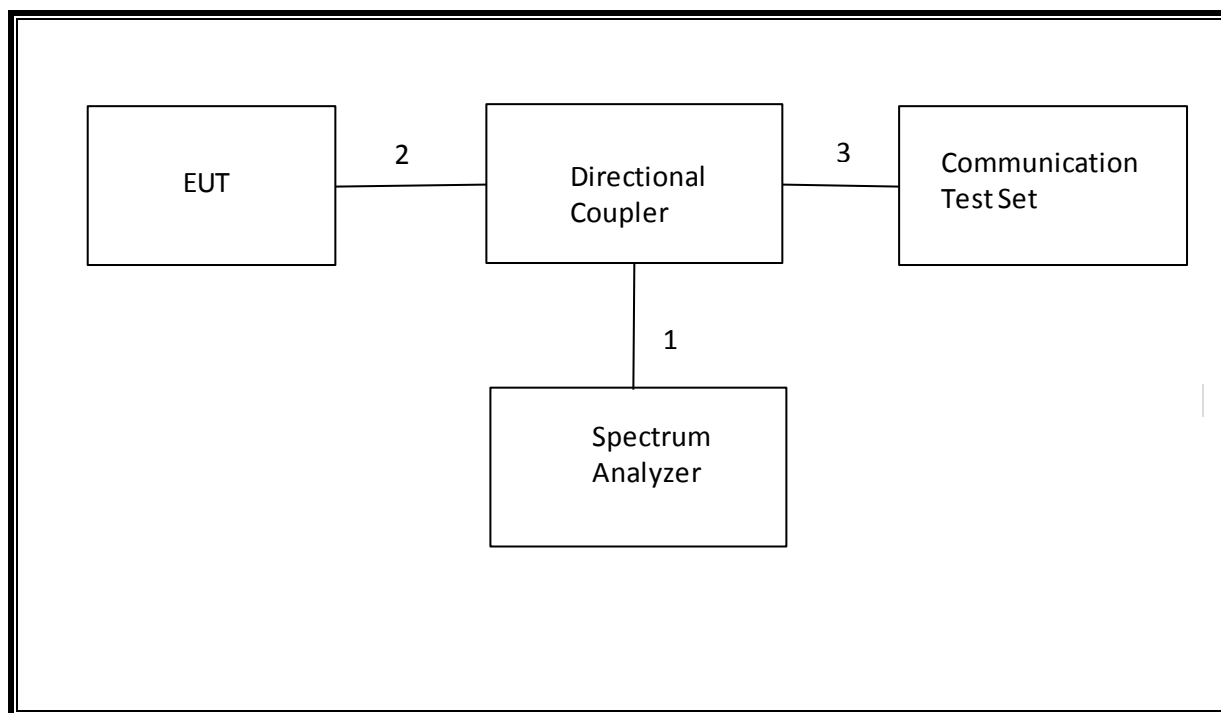

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

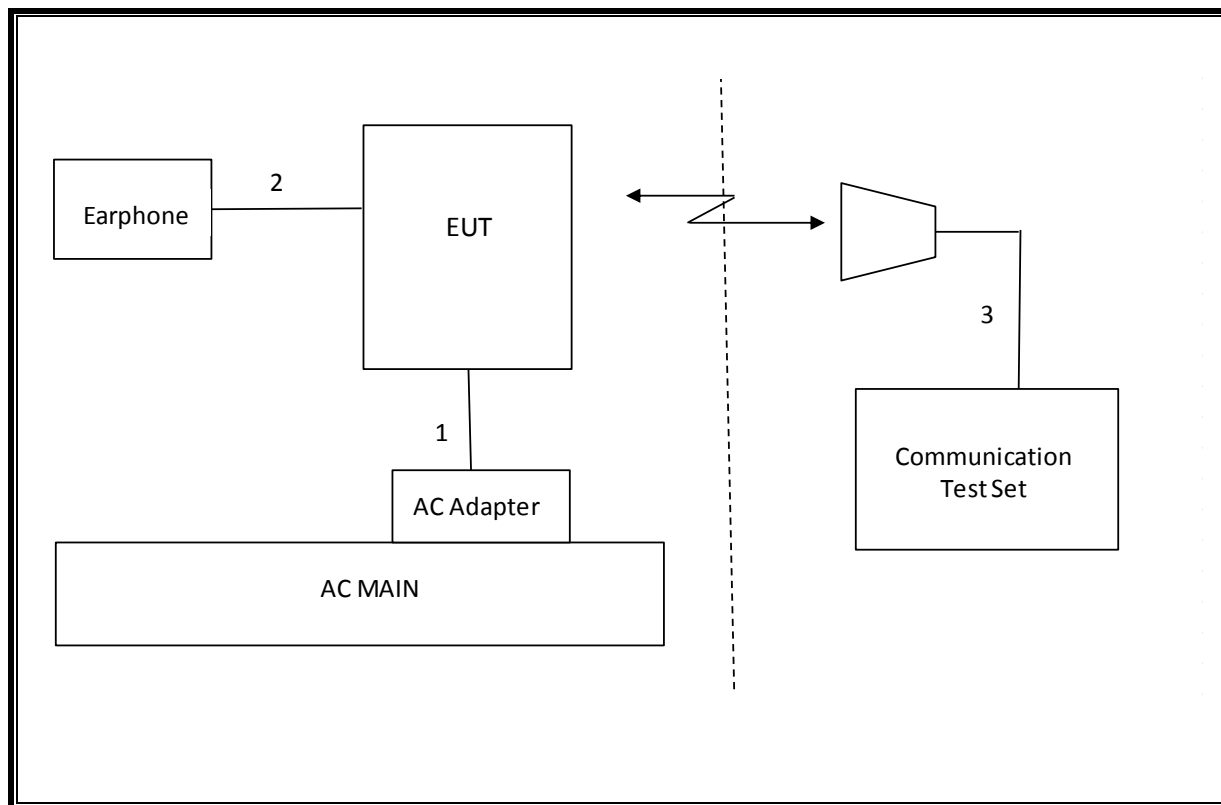

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01179	05/01/15
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	T43	03/06/16
Antenna, Horn, 18 GHz	EMCO	3115	C00783	10/25/15
Antenna, Horn, 18 GHz	EMCO	3115	C00784	10/25/15
Highpass Filter, 2.7 GHz	Micro-Tronics	HPM13194	N02687	CNR
Highpass Filter, 1.5 GHz	Micro-Tronics	HPM13193	N02688	CNR
Temperature / Humidity Chamber	Thermotron	SE 600-10-10	C00930	05/12/15
Communications Test Set	R&S	CMW500	T159	07/02/15
DC power supply, 8 V @ 3 A or 15 V	Agilent / HP	E3610A	None	CNR
Vector signal generator, 6 GHz	Agilent / HP	E4438C	None	06/18/15
Antenna, Tuned Dipole 400-1000	ETS	3121C DB4	C00993	02/11/16
Directional Coupler	RF-Lambda	RFDC5M06G15	None	CNR
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	C00589	12/17/15

Test Software List			
Description	Manufacturer	Model	Version
Radiated Software	UL	UL EMC	Version 9.5, 07/22/14
Conducted Software	UL	UL EMC	Version 9.5, 05/17/14
CLT Software	UL	UL RF	Version 1.0, 02/02/15
Antenna Port Software	UL	UL RF	Version 2.1.1.1, 1/20/15

7. SUMMARY TABLE

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst Case
2.1049	N/A	Occupied Band width (99%)	N/A	Conducted	Pass	1.2892MHz
22.917(a) 24.238(a)	RSS-132(4.5.1) RSS-133(6.5.1) RSS-139(6.5.1)	Band Edge / Conducted Spurious Emission	-13dBm		Pass	-13.278dBm
2.1046	N/A	Conducted output power	N/A		Pass	24.70dBm
22.355 24.235	RSS-132(4.3) RSS-133(6.3)	Frequency Stability	2.5PPM		Pass	0.018PPM
22.913(a)(2)	RSS-132(4.4)	Effective Radiated Power	38.5 dBm	Radiated	Pass	22.33dBm
24.232(c)	RSS-133(6.4)	Equivalent Isotropic Radiated Power	33dBm		Pass	23.68dBm
22.917(a) 24.238(a)	RSS-132(4.5.1) RSS-133(6.5.1)	Radiated Spurious Emission	-13dBm		Pass	-42.60dBm

8.1.2. CDMA2000 OUTPUT POWER RESULT

Band	Mode	Ch	Freq. (MHz)	Avg Pwr (dBm)
BC0	RC1, SO55 (Loopback)	1013	824.70	24.7
		384	836.52	24.7
		777	848.31	24.7
	RC3, SO55 (Loopback)	1013	824.70	24.7
		384	836.52	24.7
		777	848.31	24.7
	RC3, SO32 (+F-SCH)	1013	824.70	24.7
		384	836.52	24.7
		777	848.31	24.7

Band	Mode	Ch	Freq. (MHz)	Avg Pwr (dBm)
BC1	RC1, SO55 (Loopback)	25	1851.25	25.3
		600	1880.00	25.1
		1175	1908.75	25.2
	RC3, SO55 (Loopback)	25	1851.25	25.2
		600	1880.00	25.2
		1175	1908.75	25.2
	RC3, SO32 (+F-SCH)	25	1851.25	25.3
		600	1880.00	25.1
		1175	1908.75	25.2

9. PEAK TO AVERAGE RATIO

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r01

TEST SPEC



In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

MODES TESTED

CDMA BC0, CDMA BC1

RESULTS

9.1. CONDUCTED PEAK TO AVERAGE RESULT

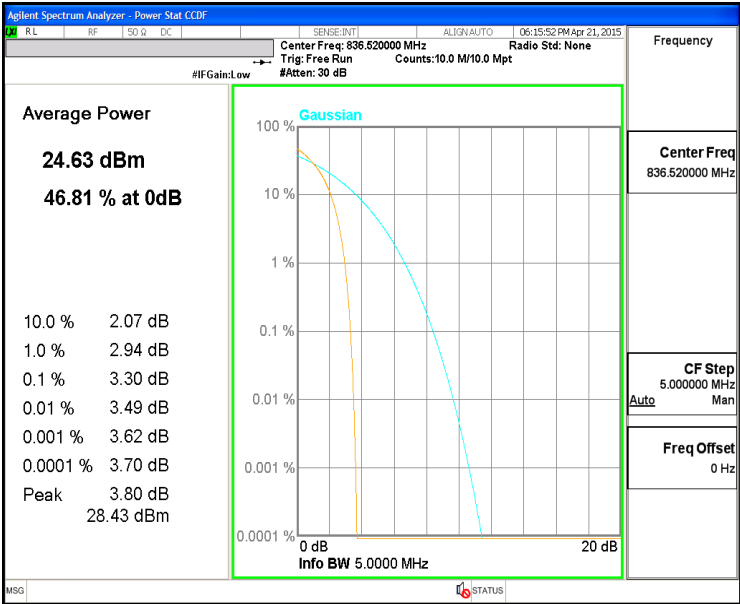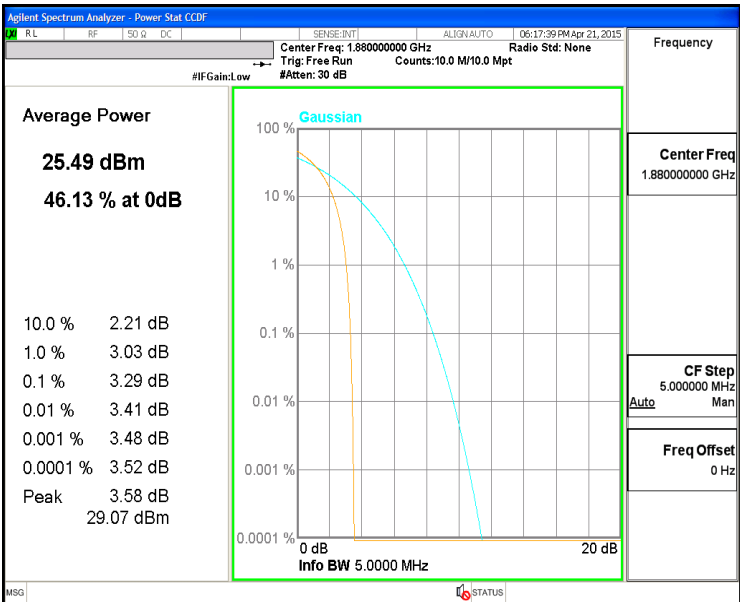Band BC0	 Average Power 24.63 dBm 46.81 % at 0dB <table border="1"> <tr><td>10.0 %</td><td>2.07 dB</td></tr> <tr><td>1.0 %</td><td>2.94 dB</td></tr> <tr><td>0.1 %</td><td>3.30 dB</td></tr> <tr><td>0.01 %</td><td>3.49 dB</td></tr> <tr><td>0.001 %</td><td>3.62 dB</td></tr> <tr><td>0.0001 %</td><td>3.70 dB</td></tr> <tr><td>Peak</td><td>3.80 dB</td></tr> <tr><td></td><td>28.43 dBm</td></tr> </table> Center Freq: 836.520000 MHz Trig: Free Run #Att: 30 dB Counts: 10.0 M/10.0 Mpt Radio Std: None Frequency Center Freq: 836.520000 MHz CF Step: 5.000000 MHz Auto Freq Offset: 0 Hz Info BW 5.0000 MHz Band BC0 1xRTT OBW Mid channel	10.0 %	2.07 dB	1.0 %	2.94 dB	0.1 %	3.30 dB	0.01 %	3.49 dB	0.001 %	3.62 dB	0.0001 %	3.70 dB	Peak	3.80 dB		28.43 dBm
10.0 %	2.07 dB																
1.0 %	2.94 dB																
0.1 %	3.30 dB																
0.01 %	3.49 dB																
0.001 %	3.62 dB																
0.0001 %	3.70 dB																
Peak	3.80 dB																
	28.43 dBm																
Band BC1	 Average Power 25.49 dBm 46.13 % at 0dB <table border="1"> <tr><td>10.0 %</td><td>2.21 dB</td></tr> <tr><td>1.0 %</td><td>3.03 dB</td></tr> <tr><td>0.1 %</td><td>3.29 dB</td></tr> <tr><td>0.01 %</td><td>3.41 dB</td></tr> <tr><td>0.001 %</td><td>3.48 dB</td></tr> <tr><td>0.0001 %</td><td>3.52 dB</td></tr> <tr><td>Peak</td><td>3.58 dB</td></tr> <tr><td></td><td>29.07 dBm</td></tr> </table> Center Freq: 1.880000000 GHz Trig: Free Run #Att: 30 dB Counts: 10.0 M/10.0 Mpt Radio Std: None Frequency Center Freq: 1.880000000 GHz CF Step: 5.000000 MHz Auto Freq Offset: 0 Hz Info BW 5.0000 MHz Band BC1 1xRTT OBW Mid channel	10.0 %	2.21 dB	1.0 %	3.03 dB	0.1 %	3.29 dB	0.01 %	3.41 dB	0.001 %	3.48 dB	0.0001 %	3.52 dB	Peak	3.58 dB		29.07 dBm
10.0 %	2.21 dB																
1.0 %	3.03 dB																
0.1 %	3.29 dB																
0.01 %	3.41 dB																
0.001 %	3.48 dB																
0.0001 %	3.52 dB																
Peak	3.58 dB																
	29.07 dBm																

10. LIMITS AND CONDUCTED RESULTS

10.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

(KDB 971168 D01 Power Meas License Digital Systems v02r01)

MODES TESTED



CDMA BC0, CDMA BC1

RESULTS

10.1.1. OCCUPIED BANDWIDTH RESULTS

Band	Mode	Channel	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
BC0	1xRTT	1013	824.7	1.28	1.41
		384	836.52	1.28	1.43
		777	848.31	1.28	1.42
	EVDO REL. 0	1013	824.7		
		384	836.52		
		777	848.31		
	EVDO REV. A	1013	824.7		
		384	836.52		
		777	848.31		
BC1	1xRTT	25	1851.25	1.28	1.44
		600	1880	1.29	1.43
		1175	1908.75	1.29	1.44
	EVDO REL. 0	25	1851.25		
		600	1880		
		1175	1908.75		
	EVDO REV. A	25	1851.25		
		600	1880		
		1175	1908.75		

10.1.1. OCCUPIED BANDWIDTH PLOTS

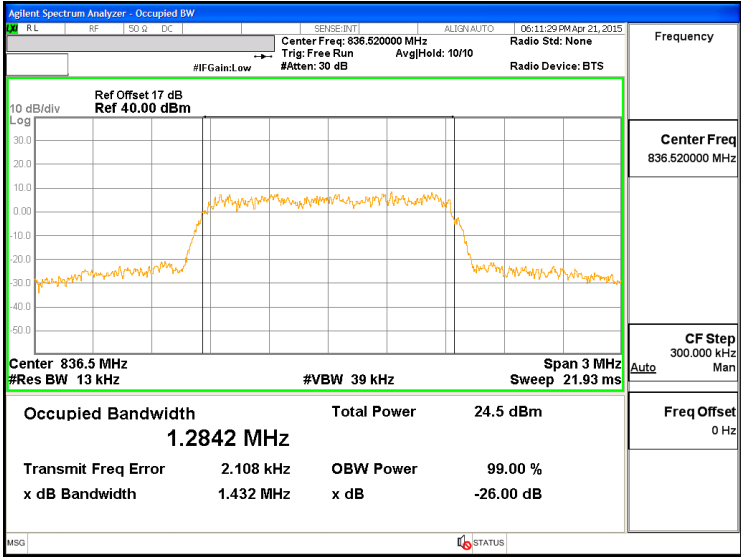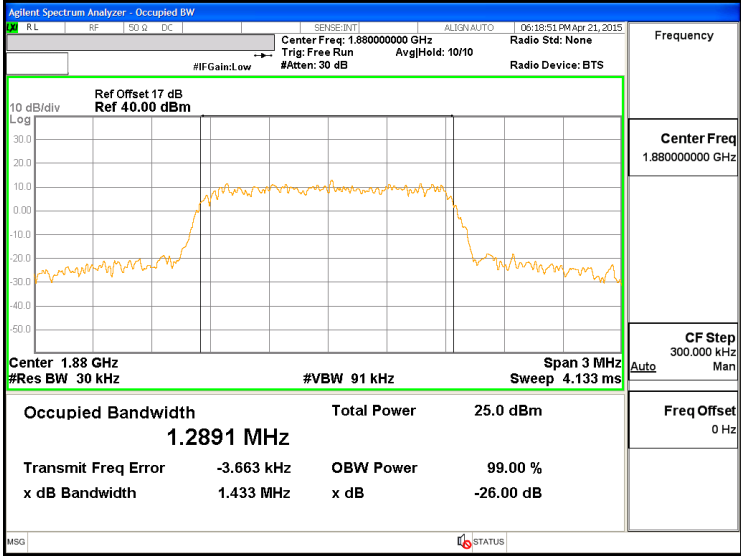Band BC0	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 836.520000 MHz Trig: Free Run #Gain: Low #Atten: 30 dB Radio Std: None Radio Device: BTS Ref Offset 17 dB Ref 40.00 dBm Center 836.5 MHz #Res BW 13 kHz #VBW 39 kHz Span 3 MHz Sweep 21.93 ms Occupied Bandwidth 1.2842 MHz Total Power 24.5 dBm Transmit Freq Error 2.108 kHz OBW Power 99.00 % x dB Bandwidth 1.432 MHz x dB -26.00 dB Frequency Center Freq 836.520000 MHz CF Step 300.000 kHz Auto Man Freq Offset 0 Hz MSG STATUS Band BC0 1xRTT OBW Mid channel
Band BC1	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 1.880000000 GHz Trig: Free Run #Gain: Low #Atten: 30 dB Radio Std: None Radio Device: BTS Ref Offset 17 dB Ref 40.00 dBm Center 1.88 GHz #Res BW 30 kHz #VBW 91 kHz Span 3 MHz Sweep 4.133 ms Occupied Bandwidth 1.2891 MHz Total Power 25.0 dBm Transmit Freq Error -3.663 kHz OBW Power 99.00 % x dB Bandwidth 1.433 MHz x dB -26.00 dB Frequency Center Freq 1.880000000 GHz CF Step 300.000 kHz Auto Man Freq Offset 0 Hz MSG STATUS Band BC1 1xRTT OBW Mid channel

10.2. BAND EDGE EMISSIONS

RULE PART(S)

FCC: §22.359, §24.238

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r01


The transmitter output was connected to an Agilent 8960 or a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

MODES TESTED

CDMA BC0, CDMA BC1

RESULTS

10.2.1. BAND EDGE PLOTS

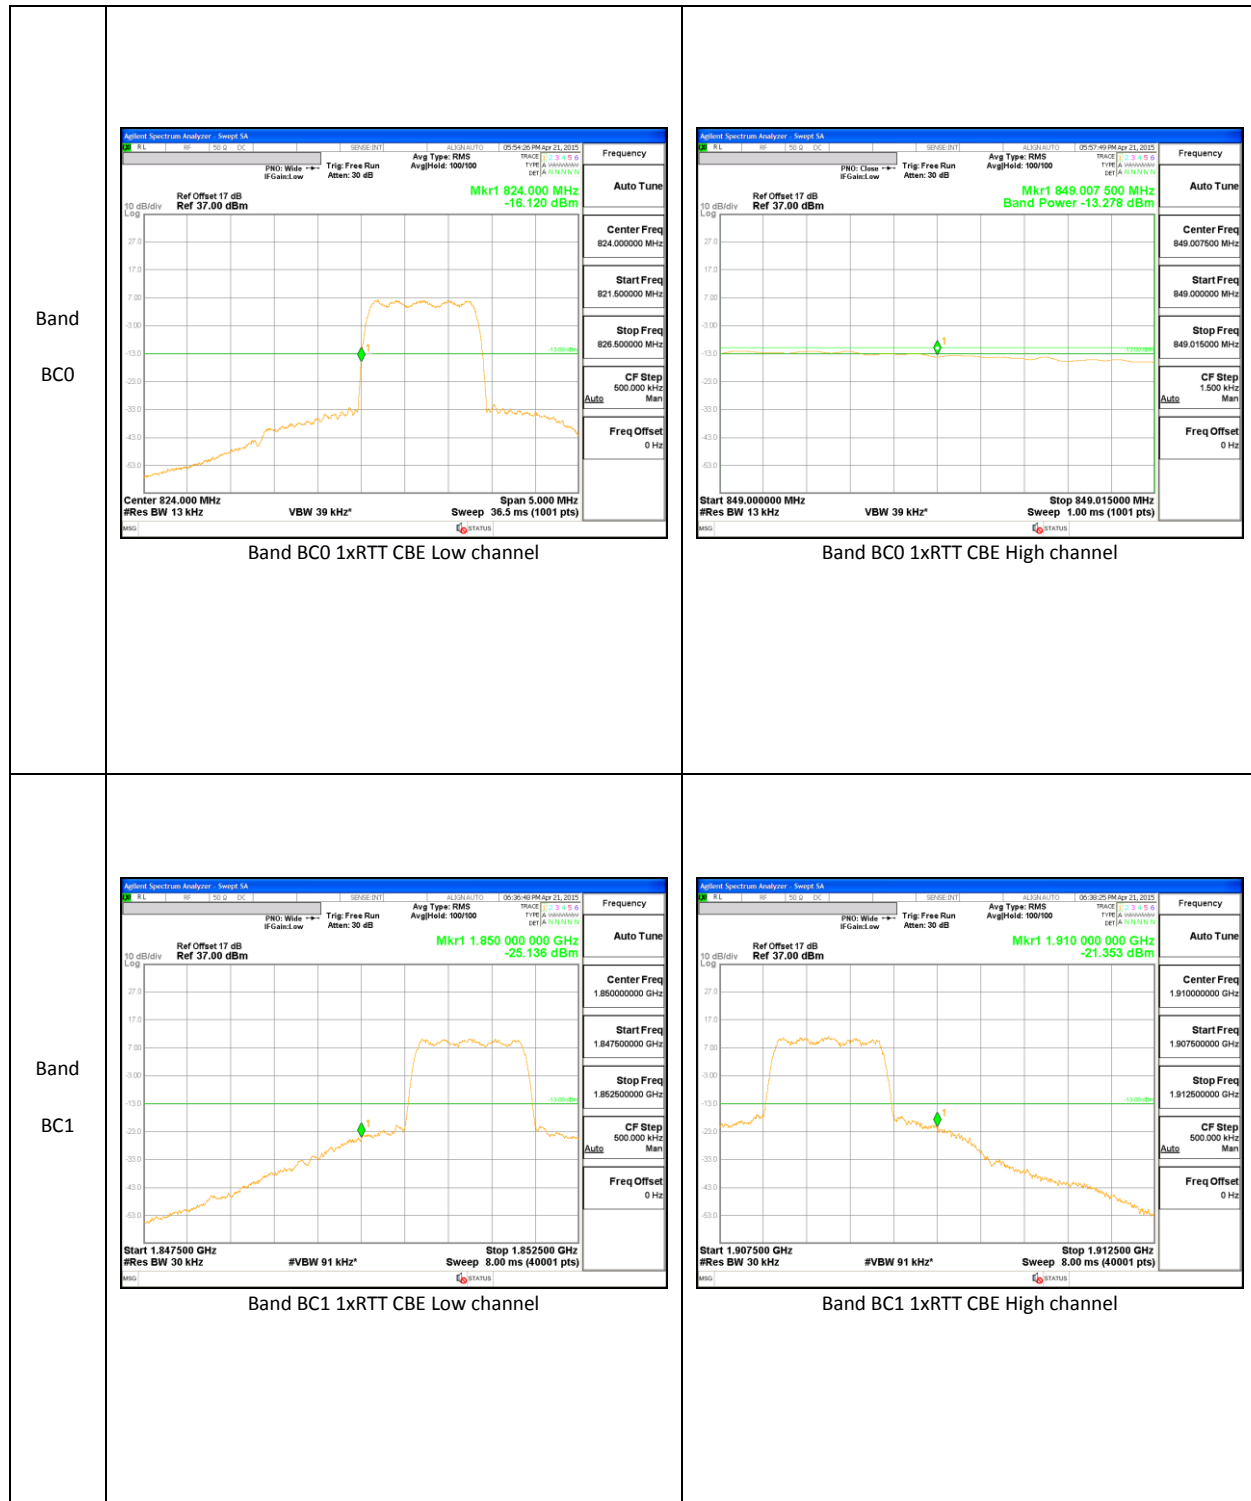

10.3. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.901, §22.917, §24.238

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r01

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

MODES TESTED


CDMA BC0, CDMA BC1

RESULTS

10.3.1. OUT OF BAND EMISSIONS RESULT

Band	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
BC0	1xRTT	824.7	-30.507	-13	-17.507
		836.52	-30.551	-13	-17.551
		848.31	-29.646	-13	-16.646
BC1	1xRTT	1851.25	-28.049	-13	-15.049
		1880	-28.103	-13	-15.103
		1908.75	-27.992	-13	-14.992

10.3.2. OUT OF BAND EMISSIONS PLOTS

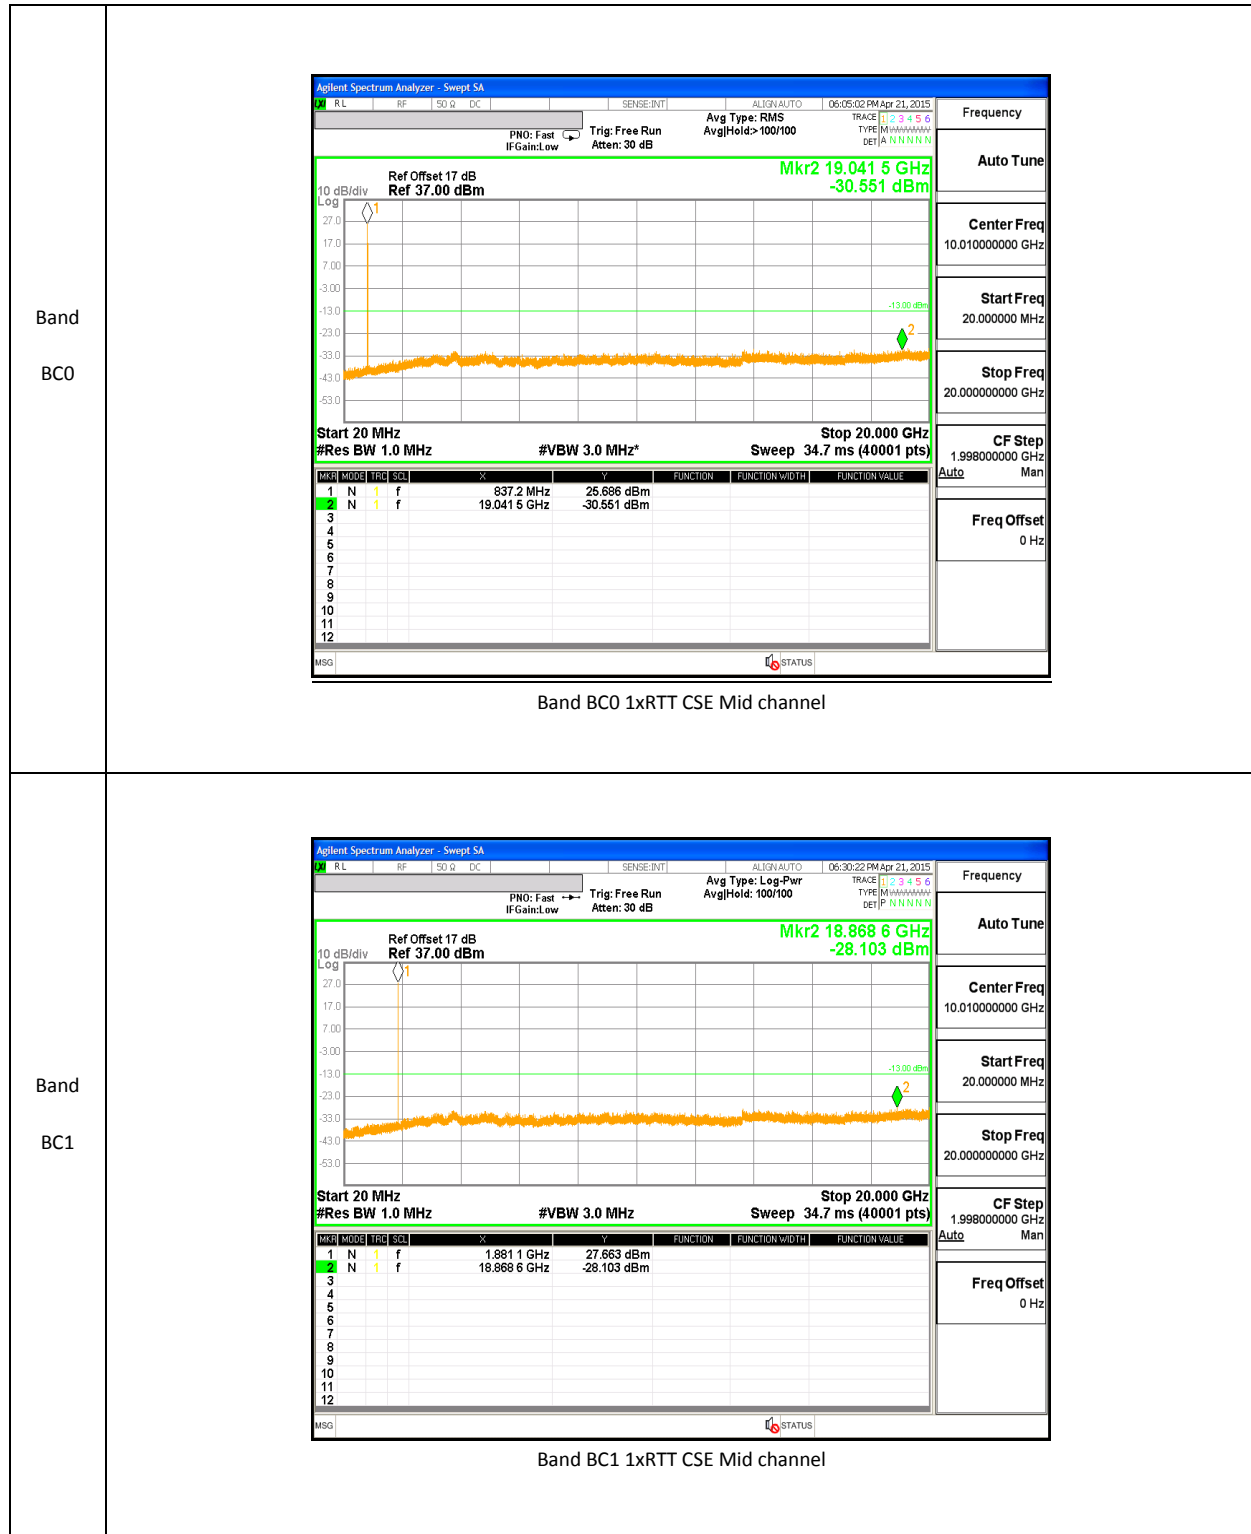

10.4. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

§24.235 - The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v02r01

MODES TESTED

CDMA BC0, CDMA BC1

RESULTS

See the following pages.

10.4.1. FREQUENCY STABILITY RESULTS

BC0 CELL BAND, – MID CHANNEL 384, Frequency 836.52 MHz

Reference Frequency: PCS Mid Channel 836.52 MHz @ 20°C Limit: to stay +/- 2.5 ppm = 2091.300 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	836.519994	0.014	2.5
3.80	40	836.520004	0.002	2.5
3.80	30	836.520005	0.001	2.5
3.80	20	836.520006	0	2.5
3.80	10	836.519993	0.015	2.5
3.80	0	836.519994	0.014	2.5
3.80	-10	836.520004	0.002	2.5
3.80	-20	836.519991	0.018	2.5
3.80	-30	836.519996	0.012	2.5

Reference Frequency: PCS Mid Channel 836.52 MHz @ 20°C Limit: to stay +/- 2.5 ppm = 2091.300 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	20	836.520006	0	2.5
4.30	20	836.5200123	-0.008	2.5
3.20	20	836.5199954	0.012	2.5

BC1 CELL BAND, Mid Channel 600 Freq: 1880MHz

Reference Frequency: PCS Mid Channel Limit: to stay +/- 2.5 ppm =			1880 4700.000	MHz @ 20°C Hz
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	50	1879.999990	-0.001	2.5
3.80	40	1879.999989	-0.001	2.5
3.80	30	1879.999990	-0.002	2.5
3.80	20	1879.999987	0	2.5
3.80	10	1879.999991	-0.002	2.5
3.80	0	1879.999989	-0.001	2.5
3.80	-10	1879.999989	-0.001	2.5
3.80	-20	1879.999989	-0.001	2.5
3.80	-30	1879.999991	-0.002	2.5

Reference Frequency: PCS Mid Channel			1880	MHz @ 20°C
Limit: to stay +/- 2.5 ppm =			4700.000	Hz
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.80	20	1879.999987	0	2.5
4.30	20	1879.999991	-0.002	2.5
3.20	20	1879.999991	-0.002	2.5

11. RADIATED TEST RESULTS

11.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913, §24.232

LIMITS

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13dB.

TEST PROCEDURE

ANSI / TIA / EIA 603C Clause 2.2.17; PSA setting reference to 971168 D01 v02r01

For peak power measurement with a PSA:

a) Set the RBW $\geq$ OBW; b) Set VBW $\geq 3 \times$ RBW; c) Set span $\geq 2 \times$ RBW; d) Sweep time = auto couple; e) Detector = peak; f) Ensure that the number of measurement points $\geq$ span/RBW; g) Trace mode = max hold;

MODES TESTED

CDMA BC0, CDMA BC1

TEST RESULTS

11.1.1. ERP/EIRP RESULTS

CDMA BC0

Band	Mode	Channel	f(MHz)	ERP	
				dBm	mW
BC0	1xRTT	1013	824.7	20.91	123.31
		384	836.52	22.33	171.00
		777	848.31	22.16	164.44
	EVDO REL. 0	1013	824.7		
		384	836.52		
		777	848.31		
	EVDO REV. A	1013	824.7		
		384	836.52		
		777	848.31		

CDMA BC1

Band	Mode	Channel	f(MHz)	EIRP	
				dBm	mW
BC1	1xRTT	25	1851.25	22.79	190.11
		600	1880	23.68	233.35
		1175	1908.75	22.79	190.11
	EVDO REL. 0	25	1851.25		
		600	1880		
		1175	1908.75		
	EVDO REV. A	25	1851.25		
		600	1880		
		1175	1908.75		

11.1.2. LTE ERP/EIRP RESULTS

Band

BC0

High Frequency Substitution Measurement UL Verification Services, Inc. Chamber A								
Company:	LG							
Project #:	15I20516							
Date:	4/27/2015							
Test Engineer:	O. Stoelting							
Configuration:	X-pos EUT Only							
Mode:	CDMA RTT BC1							
<u>Test Equipment:</u>								
Receiving: Sunol T130, and Chamber A SMA-type Cable								
Substitution: Dipole T416, 6ft N-type Cable Warehouse.								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
824.70	13.91	V	0.9	0.0	13.01	38.5	-25.4	
824.70	21.80	H	0.9	0.0	20.91	38.5	-17.5	
Mid Ch								
836.52	12.43	V	0.9	0.0	11.53	38.5	-26.9	
836.52	23.22	H	0.9	0.0	22.33	38.5	-16.1	
High Ch								
848.31	12.77	V	0.9	0.0	11.87	38.5	-26.6	
848.31	23.06	H	0.9	0.0	22.16	38.5	-16.3	
Rev. 3.17.11								
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm								

High Frequency Substitution Measurement

UL Verification Services Chamber A

Company:

Project #:

Date:

Test Engineer:

Configuration:

Mode:

LG

15I20516

4/27/2015

O. Stoelting

X-pos EUT Only

CDMA RTT BC1

Test Equipment:

Receiving: Horn T136, and Chamber A SMA Cables

Substitution: Horn T59 Substitution, 6ft N-type Cable

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch								
1.8513	12.9	V	0.85	8.05	20.06	33.0	-12.9	
1.8513	15.6	H	0.85	8.05	22.79	33.0	-10.2	
Mid Ch								
1.8800	10.4	V	0.85	8.03	17.54	33.0	-15.5	
1.8800	16.5	H	0.85	8.03	23.68	33.0	-9.3	
High Ch								
1.9088	14.1	V	0.85	8.05	21.27	33.0	-11.7	
1.9088	15.6	H	0.85	8.05	22.79	33.0	-10.2	

Rev. 3.17.11

11.2. FIELD STRENGTH OF SPURIOUS RADIATION

RULE PART(S)

FCC: §2.1053, §22.917, §24.238

LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

MODES TESTED

CDMA BC0, CDMA BC1

RESULTS

11.2.1. SPURIOUS RADIATION PLOTS

Band BC0	UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement Company: LG Project #: 15I20516 Date: 4/27/2015 Test Engineer: O. Stoelting Configuration: X-pos EUT, AC Charger Location: Chamber A Mode: CDMA 1xRTT BC0 Harmonics									
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamplifier (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Low Ch, 824.7 1649.40 -21.6 V 3.0 37.4 1.0 -58.0 -13.0 -45.0 2474.10 -26.3 V 3.0 36.4 1.0 -61.7 -13.0 -48.7 3298.80 -22.7 V 3.0 35.8 1.0 -57.5 -13.0 -44.5 1649.40 -23.0 H 3.0 37.4 1.0 -59.4 -13.0 -46.4 2474.10 -24.9 H 3.0 36.4 1.0 -60.3 -13.0 -47.3 3298.80 -22.1 H 3.0 35.8 1.0 -56.9 -13.0 -43.9 Mid Ch, 836.52 1673.04 -18.7 V 3.0 37.3 1.0 -55.0 -13.0 -42.0 2509.56 -26.3 V 3.0 36.4 1.0 -61.7 -13.0 -48.7 3346.08 -22.1 V 3.0 35.8 1.0 -56.9 -13.0 -43.9 1673.04 -19.9 H 3.0 37.3 1.0 -56.2 -13.0 -43.2 2509.56 -23.8 H 3.0 36.4 1.0 -59.2 -13.0 -46.2 3346.08 -22.4 H 3.0 35.8 1.0 -57.2 -13.0 -44.2 High Ch, 848.31 1696.62 -18.0 V 3.0 37.3 1.0 -54.3 -13.0 -41.3 2544.93 -26.6 V 3.0 36.3 1.0 -61.9 -13.0 -48.9 3393.24 -22.4 V 3.0 35.7 1.0 -57.1 -13.0 -44.1 1696.62 -19.1 H 3.0 37.3 1.0 -55.4 -13.0 -42.4 2544.93 -24.5 H 3.0 36.3 1.0 -59.8 -13.0 -46.8 3393.24 -22.2 H 3.0 35.7 1.0 -56.9 -13.0 -43.9									

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement Company: LG Project #: 15I20516 Date: 4/27/2015 Test Engineer: O. Stoelting Configuration: X-pos EUT, AC Charger Location: Chamber A Mode: CDMA 1xRTT BC1 Harmonics									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamplifier (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1851.25									
3702.50	-16.2	V	3.0	35.9	1.0	-51.1	-13.0	-38.1	
5553.75	-18.5	V	3.0	35.5	1.0	-53.0	-13.0	-40.0	
7405.00	-17.4	V	3.0	35.7	1.0	-52.1	-13.0	-39.1	
3702.50	-8.0	H	3.0	35.9	1.0	-42.8	-13.0	-29.8	
5553.75	-17.9	H	3.0	35.5	1.0	-52.4	-13.0	-39.4	
7405.00	-16.5	H	3.0	35.7	1.0	-51.3	-13.0	-38.3	
Mid Ch, 1880									
3760.00	-7.8	V	3.0	35.8	1.0	-42.6	-13.0	-29.6	
5640.00	-18.2	V	3.0	35.5	1.0	-52.7	-13.0	-39.7	
7520.00	-16.9	V	3.0	35.7	1.0	-51.6	-13.0	-38.6	
3760.00	-9.9	H	3.0	35.8	1.0	-44.7	-13.0	-31.7	
5640.00	-17.8	H	3.0	35.5	1.0	-52.2	-13.0	-39.2	
7520.00	-16.1	H	3.0	35.7	1.0	-50.8	-13.0	-37.8	
High Ch, 1908.75									
3817.50	-12.7	V	3.0	35.8	1.0	-47.5	-13.0	-34.5	
5726.25	-17.9	V	3.0	35.5	1.0	-52.4	-13.0	-39.4	
7635.00	-16.4	V	3.0	35.8	1.0	-51.1	-13.0	-38.1	
3817.50	-17.7	H	3.0	35.8	1.0	-52.5	-13.0	-39.5	
5726.25	-17.8	H	3.0	35.5	1.0	-52.3	-13.0	-39.3	
7635.00	-15.6	H	3.0	35.8	1.0	-50.4	-13.0	-37.4	