

HCT CO., LTD.

CERTIFICATE OF COMPLIANCE

FCC Certification

Applicant Name: LG Electronics MobileComm U.S.A., Inc. Address: 10101 Old Grove Road, San Diego, CA 92131	Date of Issue: November 01, 2011 Location: HCT CO., LTD., 105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, Korea Test Report No.: HCTR1111FR01 HCT FRN: 0005866421 IC Recognition No.: 5944A-3
--	---


FCC ID: IC: APPLICANT:	ZNFC800G 2703C-C800G LG Electronics MobileComm U.S.A., Inc.
---	--

FCC Model(s): IC Model(s): Additional FCC Model(s): EUT Type: Max. RF Output Power: Frequency Range: Modulation type FCC Classification: FCC Rule Part(s):	C800G C800G LG-C800G, C800g, LG-C800g, LGC800G, LGC800g Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth & WLAN Wi-Fi 802.11b (21.66 dBm) / Wi-Fi 802.11g (21.18 dBm) / Wi-Fi 802.11n (20.98 dBm) 2412 MHz -2462 MHz CCK/DSSS/OFDM Digital Transmission System(DTS) Part 15.247
---	---

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.


HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)



Report prepared by

: Jong Seok Lee

Test engineer of RF Team



Approved by

: Sang Jun Lee

Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

FCC PT.15.247 TEST REPORT	FCC & IC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1111FR01	Date of Issue: November 01, 2011	EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth & WLAN	FCC ID: ZNFC800G	IC: 2703C-C800G

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCTR1111FR01	November 01, 2011	- First Approval Report

Table of Contents

1. GENERAL INFORMATION	4
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE	5
3.3 GENERAL TEST PROCEDURES	5
3.4 DESCRIPTION OF TEST MODES	5
4. INSTRUMENT CALIBRATION.....	6
5. FACILITIES AND ACCREDITATIONS	6
5.1 FACILITIES	6
5.2 EQUIPMENT	6
6. ANTENNA REQUIREMENTS	7
7. TEST RESULT	8
7.1 6dB BANDWIDTH MEASUREMENT (802.11b/g/n)	8
7.2 OBW (99 % BW) MEASUREMENT (802.11b/g/n).....	1 5
7.3 OUTPUT POWER MEASUREMENT (802.11b/g/n).....	2 2
7.4 POWER SPECTRAL DENSITY (802.11b/g/n).....	5 6
7.5 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS ...	6 2
7.6 RADIATED MEASUREMENT.....	7 6
7.6.1 RADIATED SPURIOUS EMISSIONS.....	7 6
7.6.2 RECEIVER SPURIOUS EMISSIONS.....	8 4
7.6.3 RADIATED RESTRICTED BAND EDGE MEASUREMENTS	8 5
7.7 POWERLINE CONDUCTED EMISSIONS	8 6
8. LIST OF TEST EQUIPMENT	9 1

FCC PT.15.247 TEST REPORT	FCC & IC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1111FR01	Date of Issue: November 01, 2011	EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth & WLAN	FCC ID: ZNFC800G	IC: 2703C-C800G

1. GENERAL INFORMATION

Applicant: LG Electronics MobileComm U.S.A., Inc.
Address: 10101 Old Grove Road, San Diego, CA 92131

FCC ID: ZNFC800G
IC: 2703C-C800G
EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth & WLAN
FCC Model Name: C800G
I C Model Name: C800G
Additional Model Name: LG-C800G, C800g, LG-C800g, LGC800G, LGC800g

Date(s) of Tests: October 16, 2011 ~ October 27, 2011
Contact person: Name: Bong Hyo Han
Phone #: +82-2-2033-1160

Place of Tests: HCT Co., Ltd.
105-1, Jangam-ri , Majang-Myeon, Icheon-si, Kyunggi-Do, 467-811, KOREA.
(IC Recognition No. : 5944A-3)

2. EUT DESCRIPTION

EUT Type	Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth & WLAN
FCC Model Name	C800G
IC Model Name	C800G
Additional Model Name	LG-C800G, C800g, LG-C800g, LGC800G, LGC800g
Power Supply	DC 3.7 V
Battery type	Li-ion Battery(Standard)
Frequency Range	TX: 2412 MHz ~ 2462 MHz RX: 2412 MHz ~ 2462 MHz
Max. RF Output Power:	Wi-Fi 802.11b (21.66 dBm) / Wi-Fi 802.11g (21.18 dBm)) / Wi-Fi 802.11n (20.98 dBm)
Modulation Type	DSSS/CCK(802.11b), OFDM(802.11g, 802.11n)
Antenna Specification	Manufacturer: Mobitech Antenna type: Built-in Antenna Peak Gain : -2.27 dBi

3. TEST METHODOLOGY

The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz(ANSI C63.4-2003)

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version :2003) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version: 2003)

3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

FCC PT.15.247 TEST REPORT	FCC & IC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1111FR01	Date of Issue: November 01, 2011	EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth & WLAN	FCC ID: ZNFC800G	IC: 2703C-C800G

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, 467-811, Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2003) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated March 02, 2011 (Registration Number: 90661)

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

FCC PT.15.247 TEST REPORT	FCC & IC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1111FR01	Date of Issue: November 01, 2011	EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth & WLAN	FCC ID: ZNFC800G	IC: 2703C-C800G

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

* The antennas of this E.U.T are permanently attached.

*The E.U.T Complies with the requirement of §15.203

FCC PT.15.247 TEST REPORT	FCC & IC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1111FR01	Date of Issue: November 01, 2011	EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth & WLAN	FCC ID: ZNFC800G	IC: 2703C-C800G

7. TEST RESULT


7.1 6dB BANDWIDTH MEASUREMENT (802.11b/g/n)

Test Requirements and limit, §15.247(a)(2)

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

The minimum permissible 6dB bandwidth is 500 kHz.

■ TEST CONFIGURATION

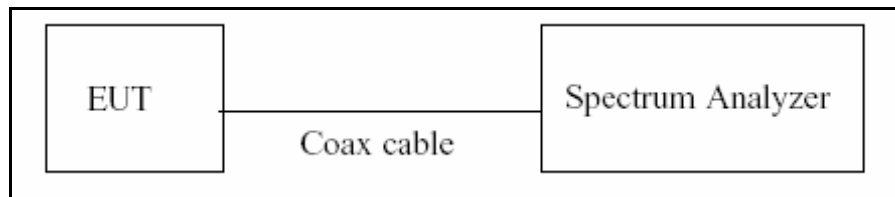

■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to

RBW: 100 kHz

VBW: 100 kHz

SPAN: 40 MHz

■ TEST RESULTS

Conducted 6dB Bandwidth Measurements for 802.11b

802.11b Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	7.775	0.500	Pass
2437	6	7.916	0.500	Pass
2462	11	6.988	0.500	Pass

Conducted 6dB Bandwidth Measurements for 802.11g


802.11g Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	16.31	0.500	Pass
2437	6	16.29	0.500	Pass
2462	11	16.34	0.500	Pass

Conducted 6dB Bandwidth Measurements for 802.11n


802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	17.55	0.500	Pass
2437	6	17.29	0.500	Pass
2462	11	16.30	0.500	Pass

■ RESULT PLOTS


6dB Bandwidth plot (802.11b-CH 1)

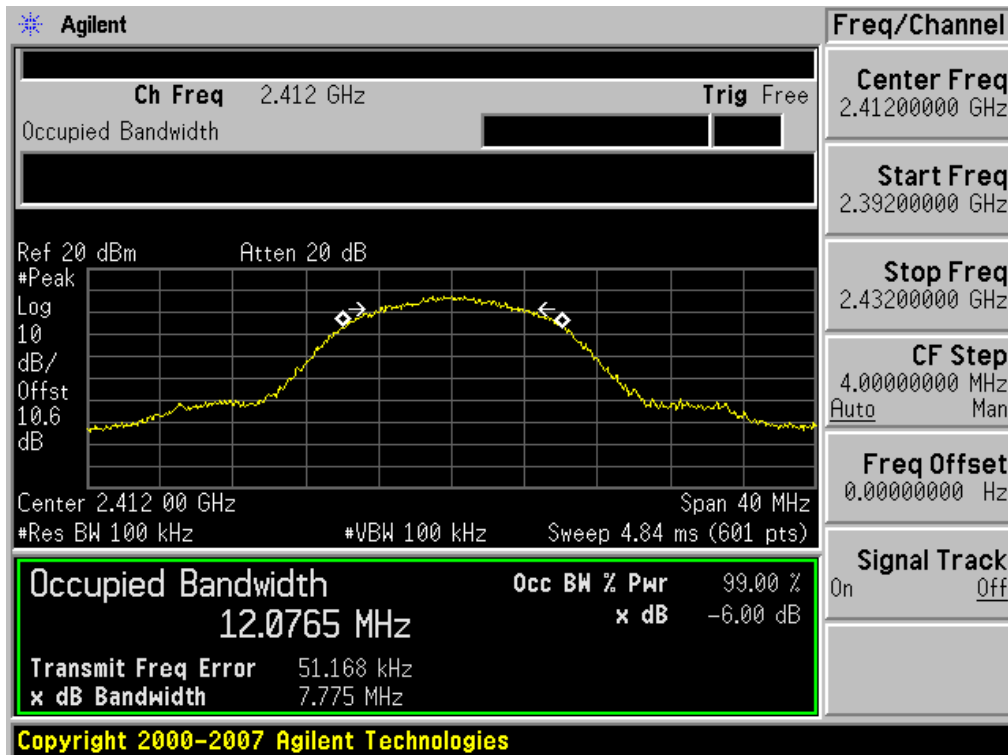


6dB Bandwidth plot (802.11b-CH 6)

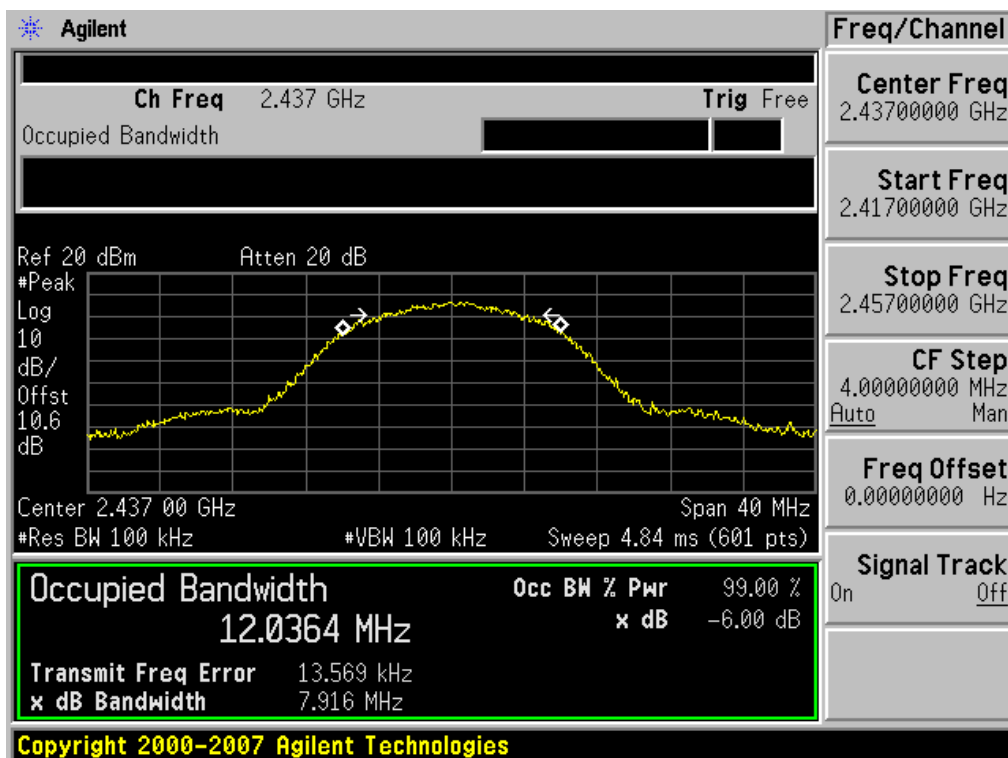


6dB Bandwidth plot (802.11b-CH 11)

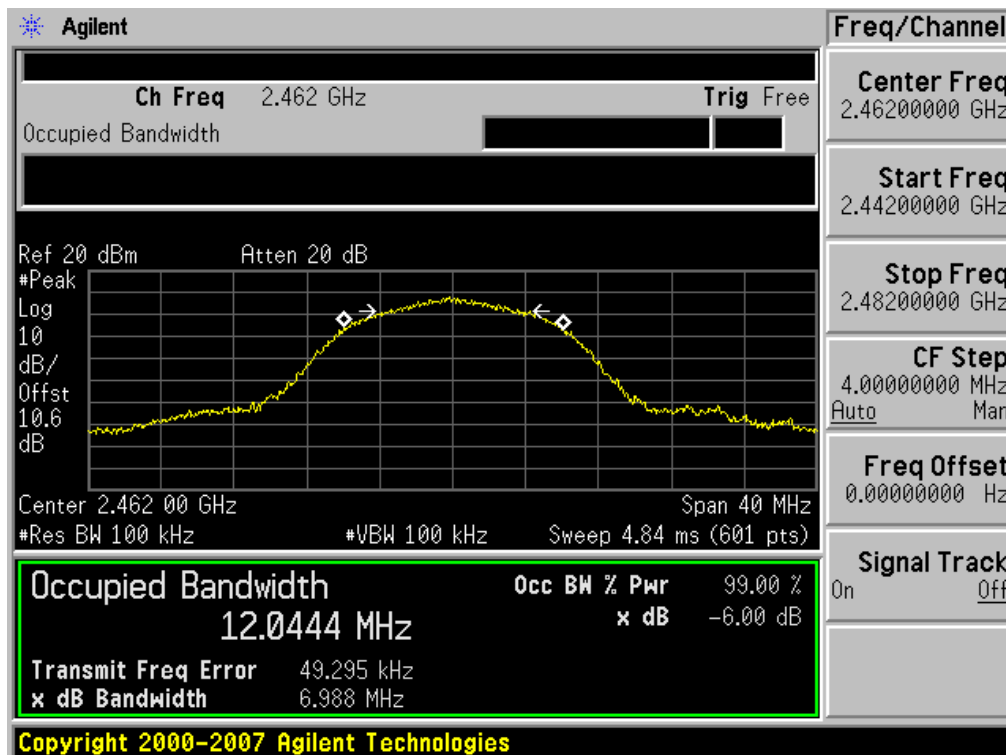


6dB Bandwidth plot (802.11g-CH 1)

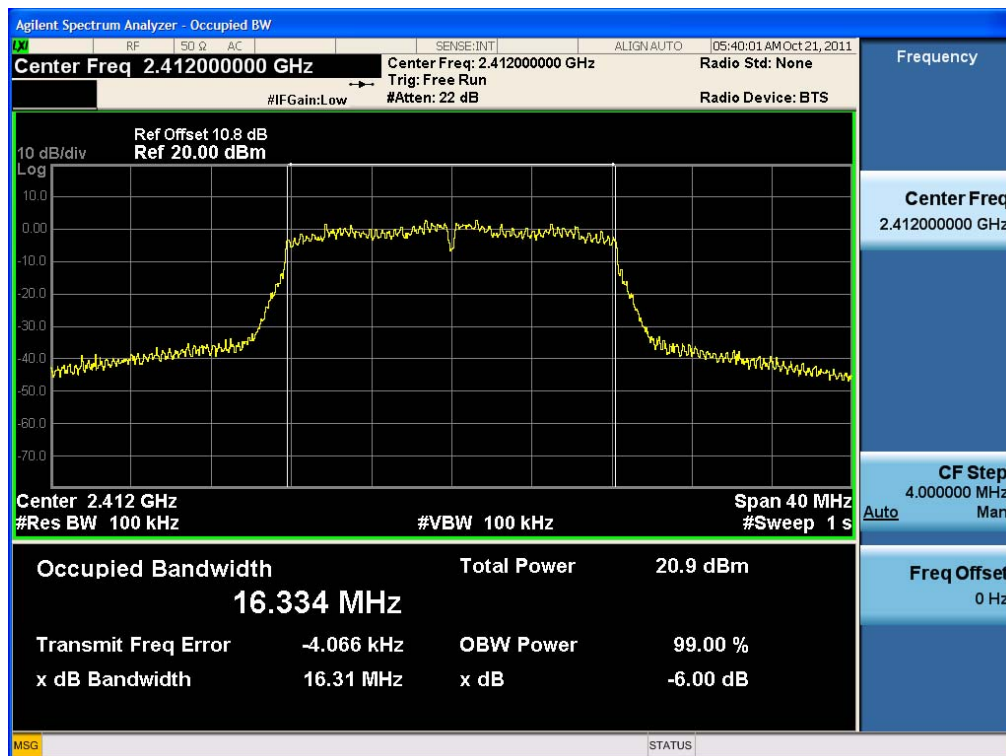


6dB Bandwidth plot (802.11g-CH 6)

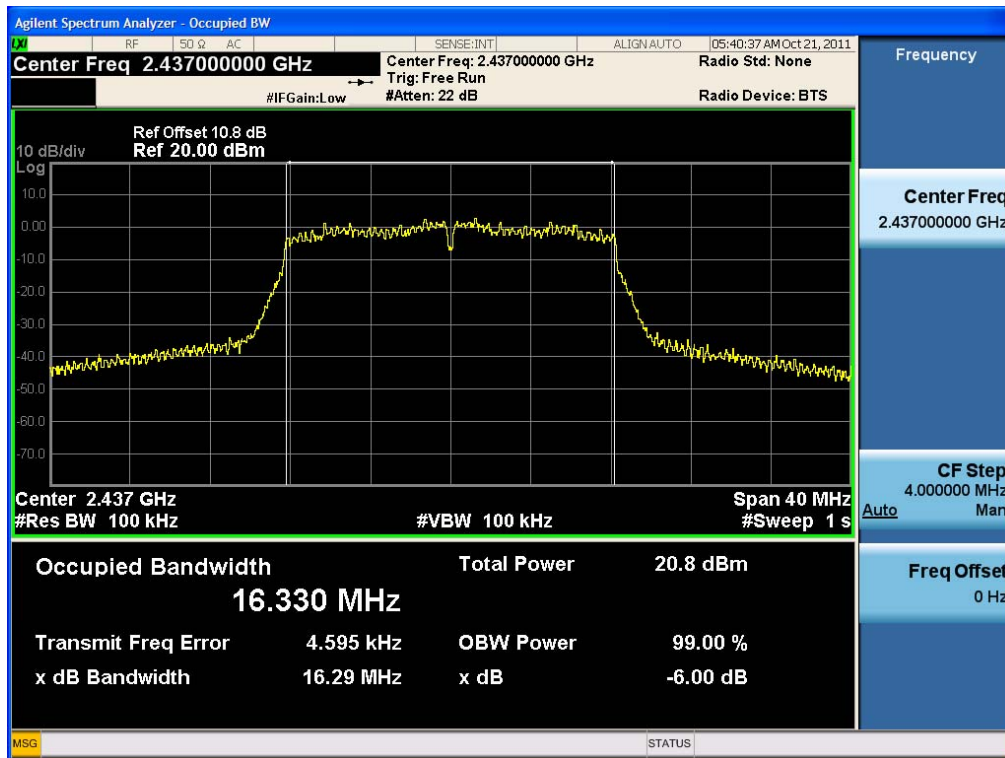


6dB Bandwidth plot (802.11g-CH 11)

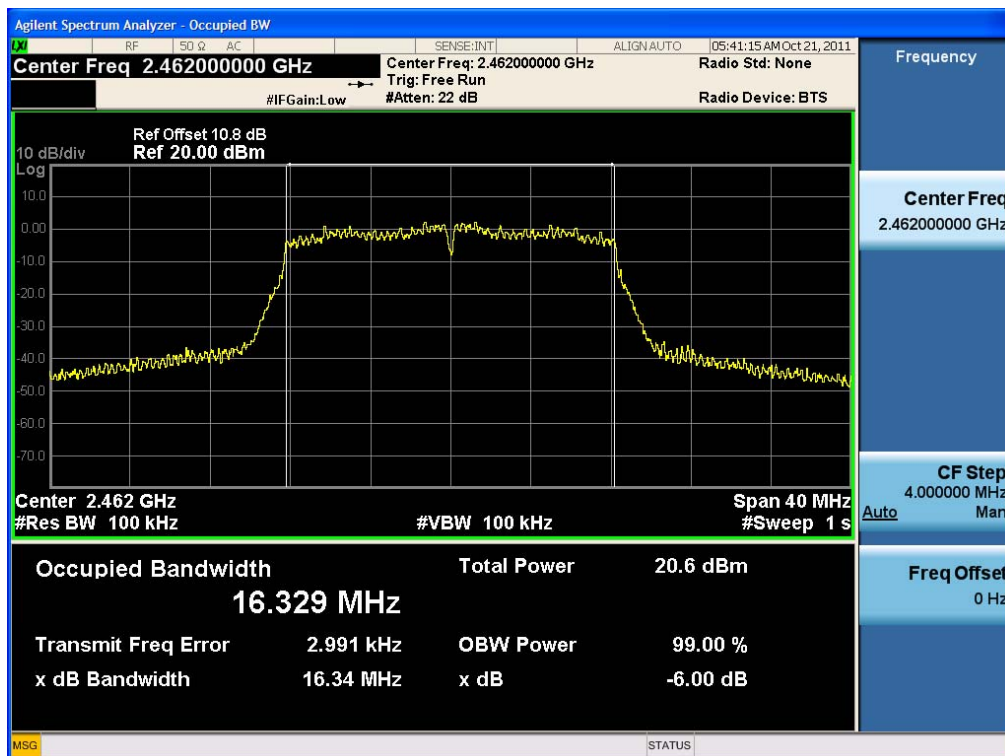


6dB Bandwidth plot (802.11n-CH 1)

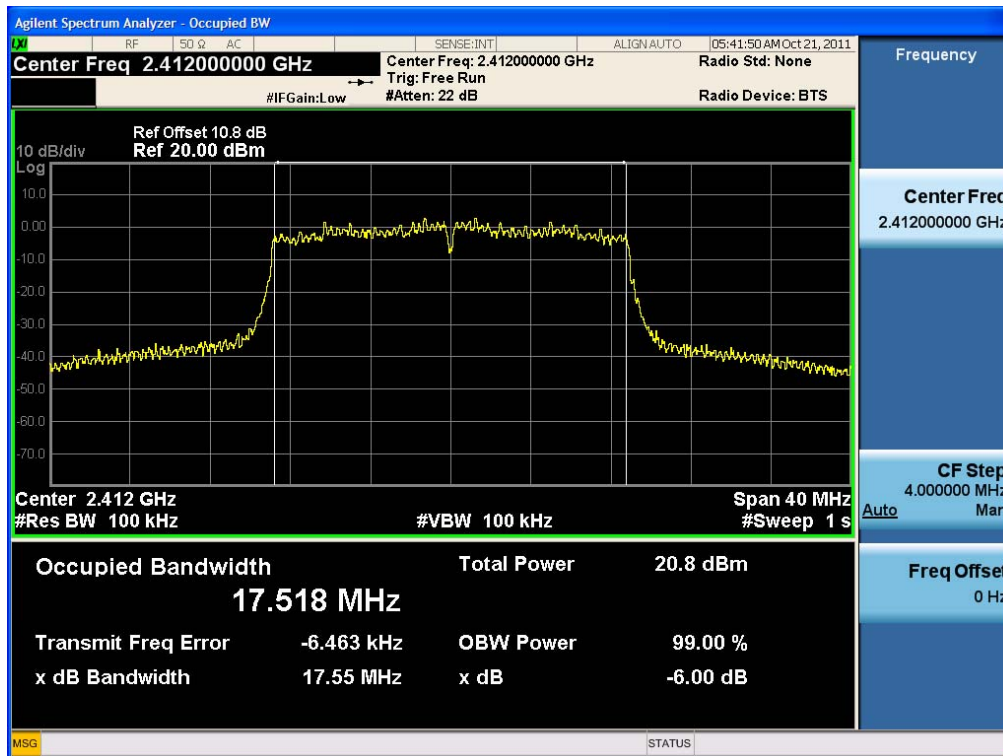

6dB Bandwidth plot (802.11n-CH 6)

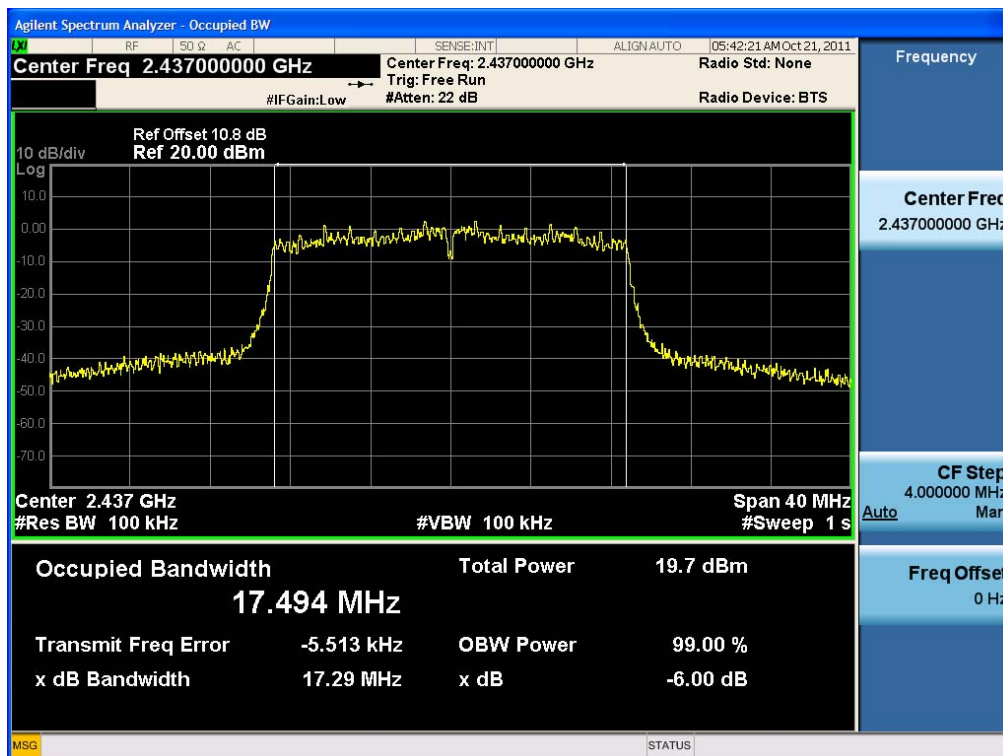


6dB Bandwidth plot (802.11n-CH 11)

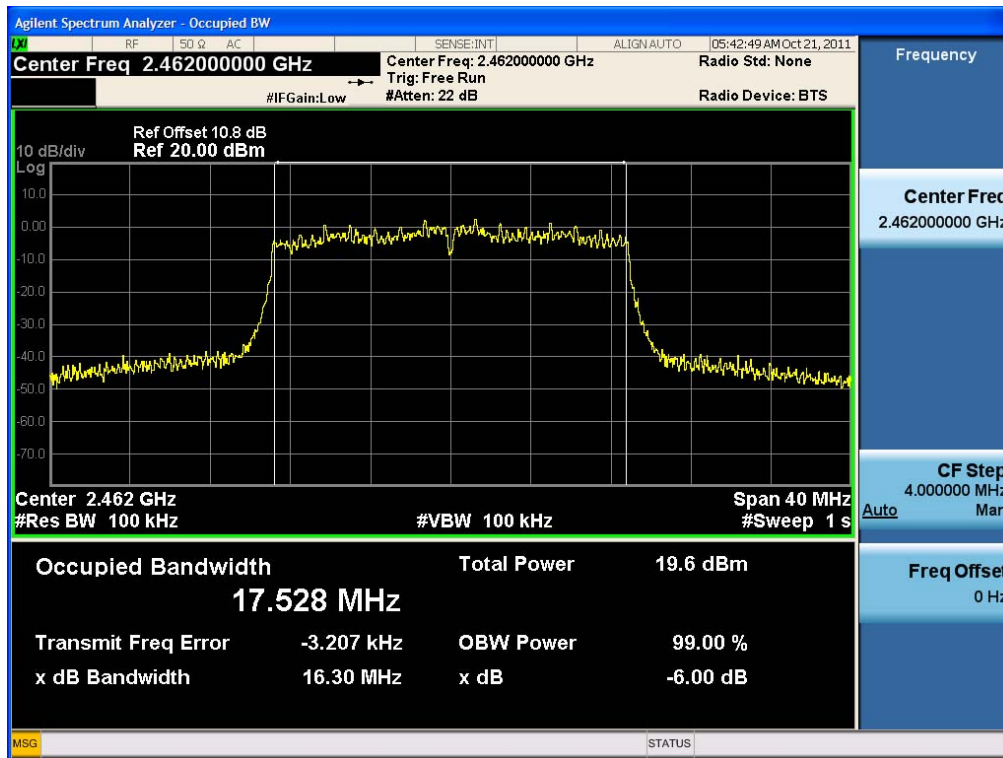

FCC PT.15.247 TEST REPORT	FCC & IC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCTR1111FR01	Date of Issue: November 01, 2011	EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth & WLAN	FCC ID: ZNFC800G	IC: 2703C-C800G

7.2 OBW (99 % BW) MEASUREMENT (802.11b/g/n)

■ TEST CONFIGURATION

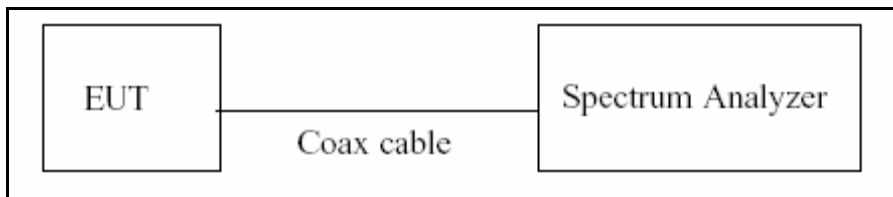

■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to

RBW: RSS GEN required the RBW used for measuring 99 % must be at least 1 % of the SPAN.

VBW: 3 times of RBW

SPAN: 40 MHz

■ TEST RESULTS

Conducted OBW Measurements for 802.11b

802.11b Mode		Measured Bandwidth [MHz]
Frequency [MHz]	Channel No.	
2412	1	12.0779
2437	6	12.0474
2462	11	12.0503

Conducted OBW Measurements for 802.11g


802.11g Mode		Measured Bandwidth [MHz]
Frequency [MHz]	Channel No.	
2412	1	16.5921
2437	6	16.6204
2462	11	16.5848

Conducted OBW Measurements for 802.11n


802.11n Mode		Measured Bandwidth [MHz]
Frequency [MHz]	Channel No.	
2412	1	17.5646
2437	6	17.5480
2462	11	17.5953

■ RESULT PLOTS


OBW plot (802.11b-CH 1)

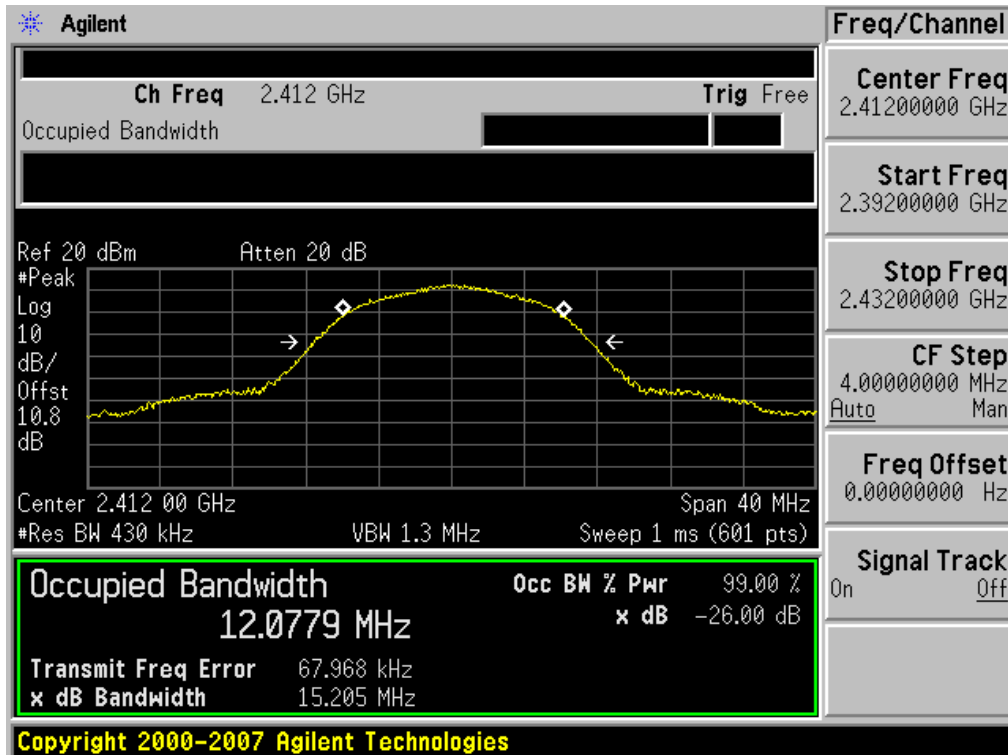


OBW plot (802.11b-CH 6)

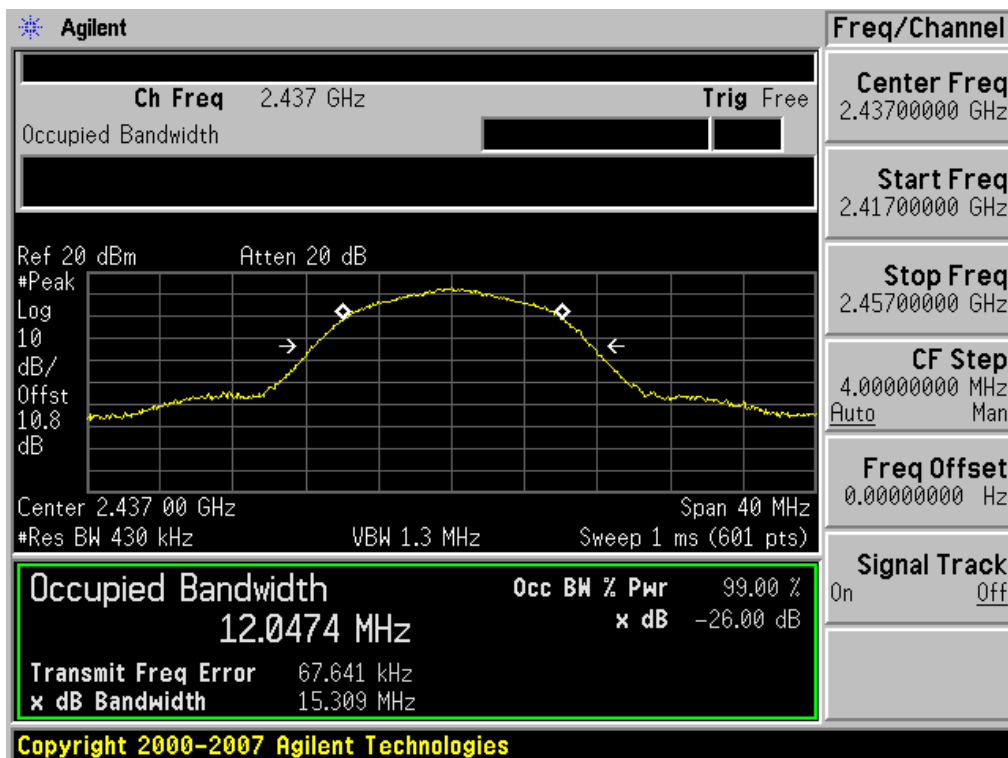


OBW plot (802.11b-CH 11)

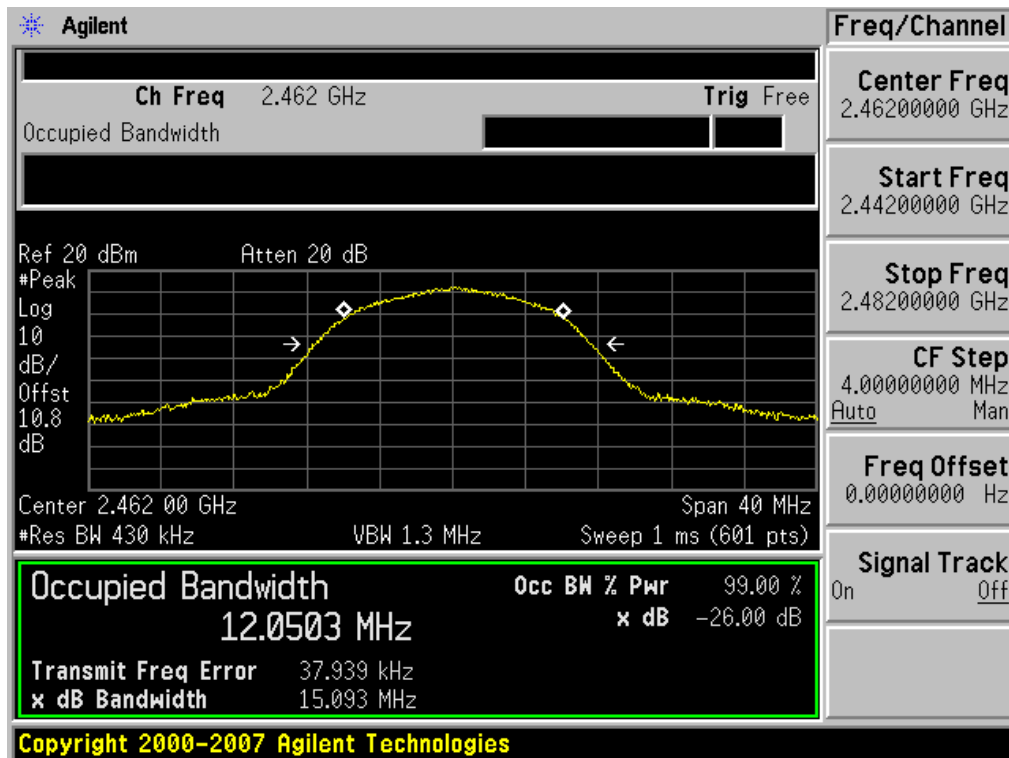


OBW plot (802.11g-CH 1)

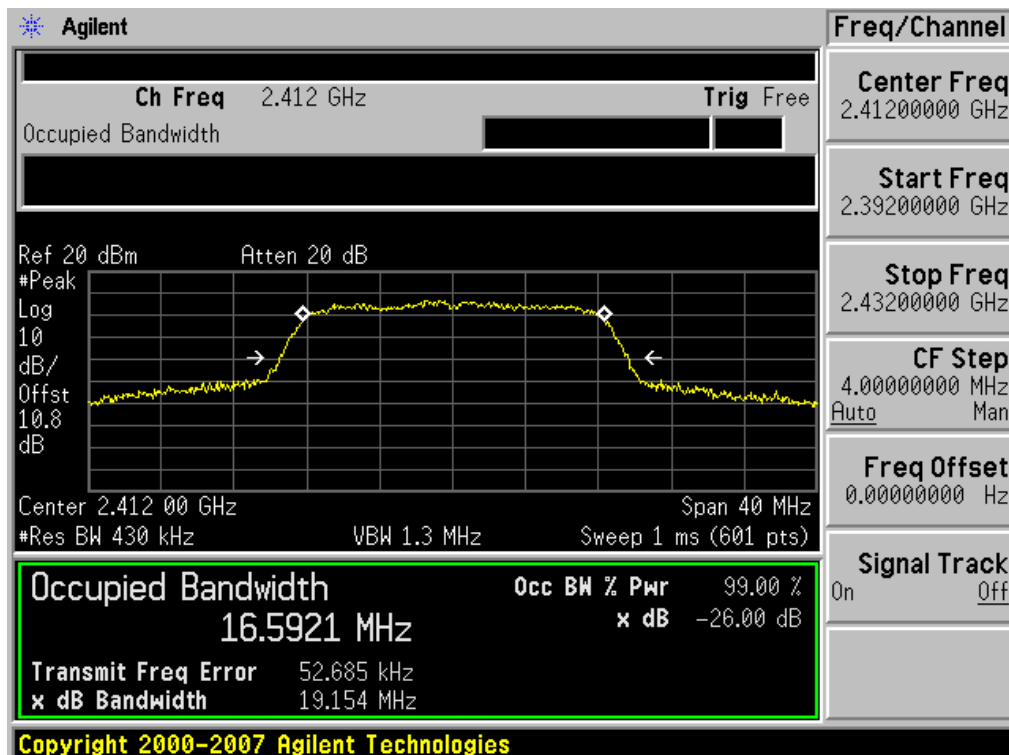


OBW plot (802.11g-CH 6)

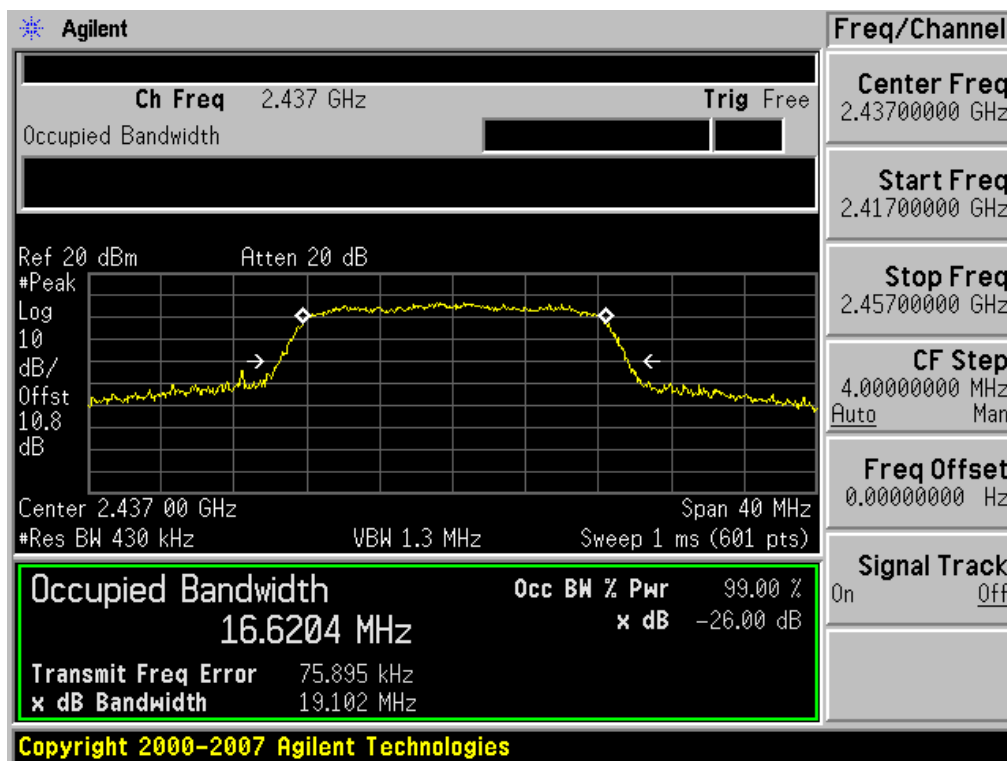


OBW plot (802.11g-CH 11)

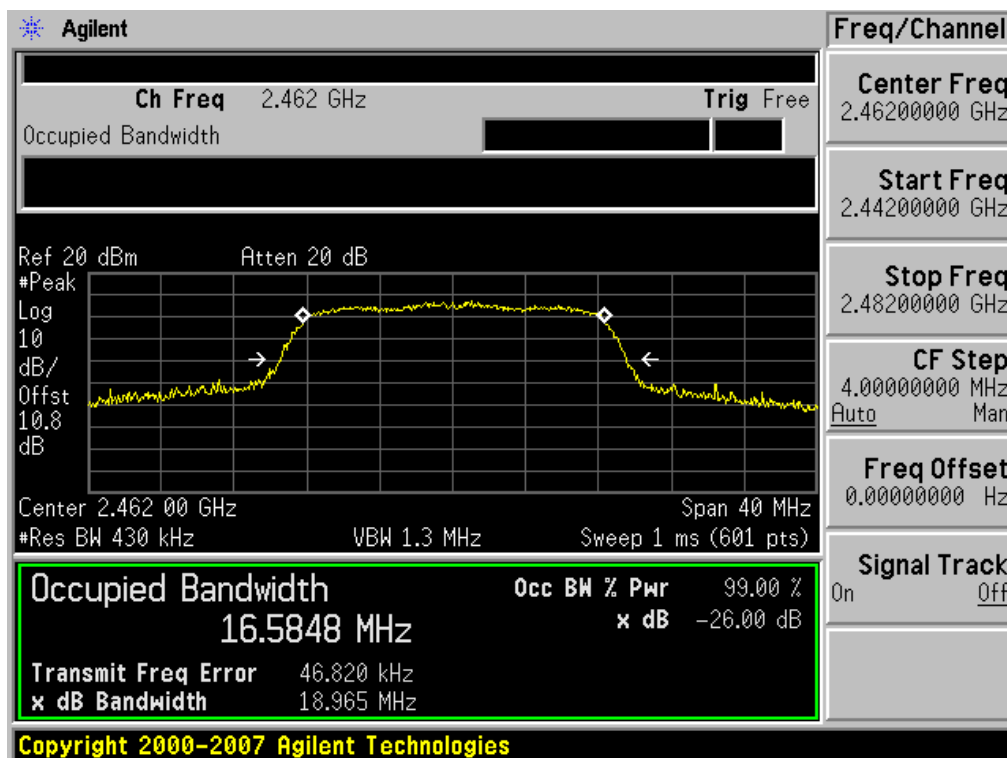


OBW plot (802.11n-CH 1)

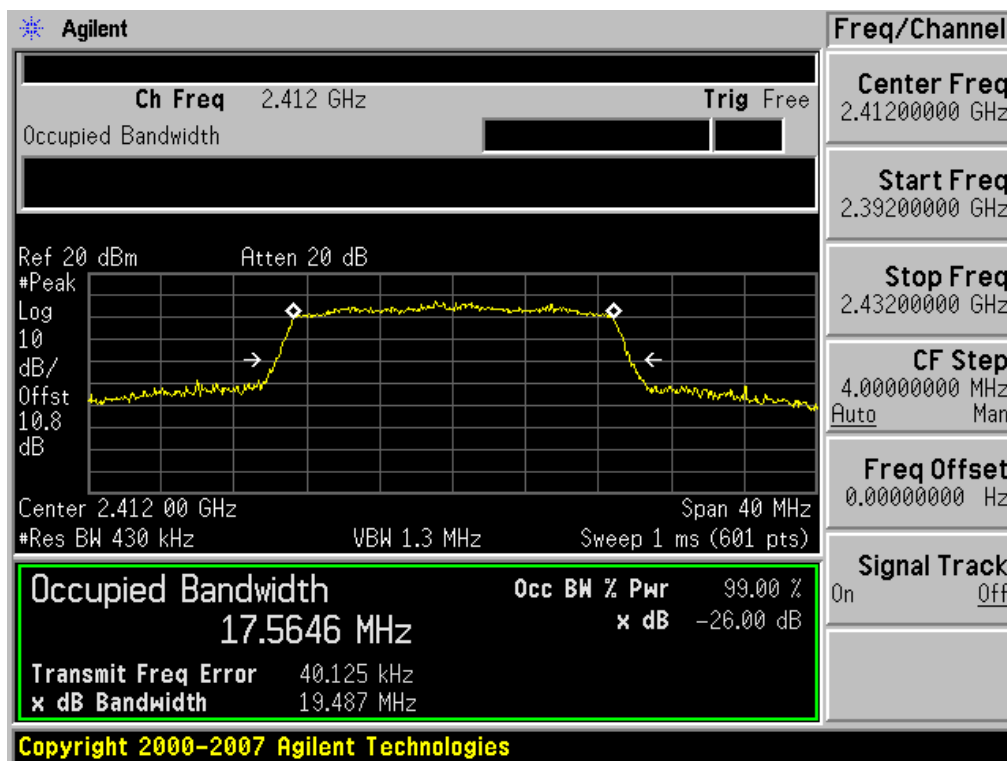

OBW plot (802.11n-CH 6)

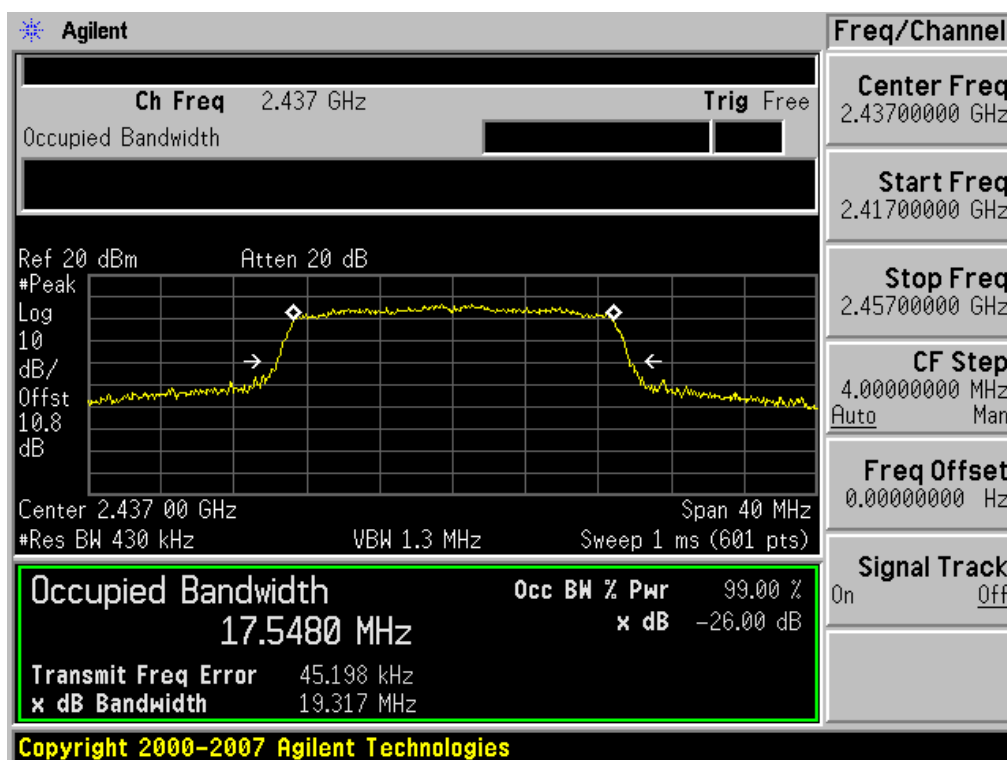

OBW plot (802.11n-CH 11)

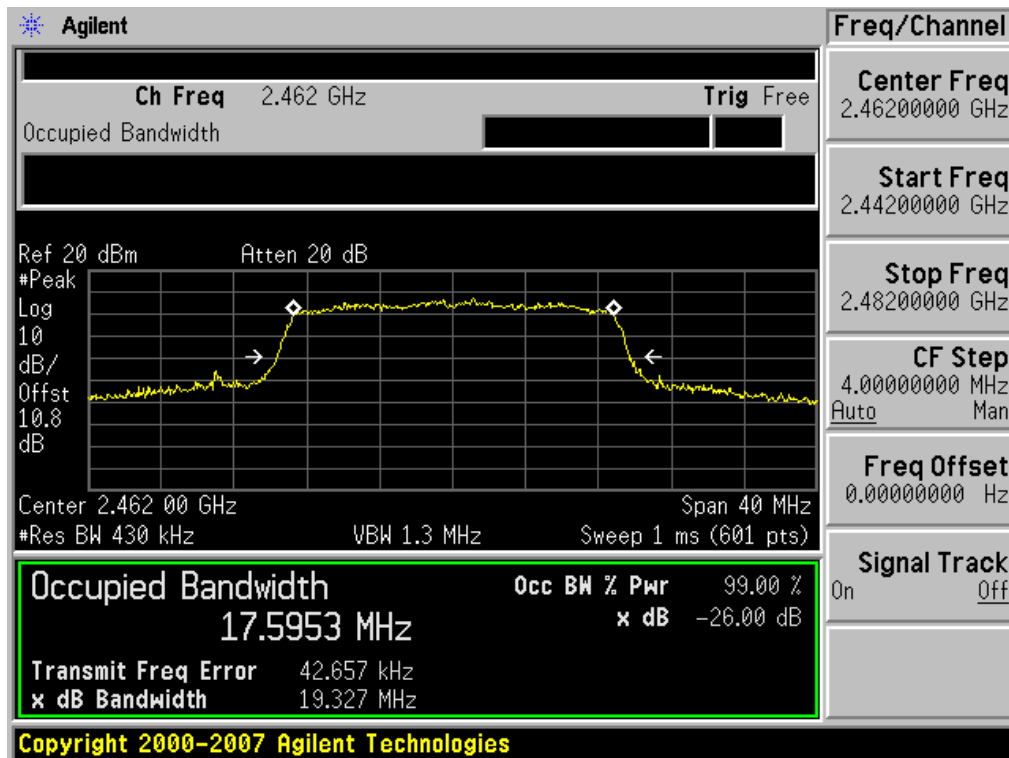


7.3 OUTPUT POWER MEASUREMENT (802.11b/g/n)

Test Requirements and limit, §15.247(b)(3)

A transmitter antenna terminal of EUT is connected to the input of a Spectrum Analyzer. Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt.

■ TEST CONFIGURATION

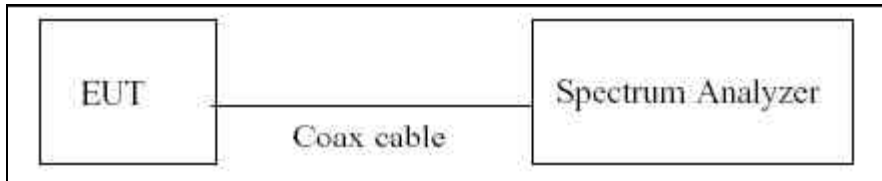

■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to

RBW: 1 MHz

VBW: 1 MHz

SPAN: 40 MHz

Detector Mode = Peak

FCC & IC CERTIFICATION REPORT				
FCC PT.15.247 TEST REPORT				www.hct.co.kr
Test Report No. HCTR1111FR01	Date of Issue: November 01, 2011	EUT Type: Cellular/PCS GSM/EDGE/WCDMA Phone with Bluetooth & WLAN	FCC ID: ZNFC800G	IC: 2703C-C800G

■ TEST RESULTS

Conducted Output Power Measurements (802.11b Mode)

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	1 Mbps	17.85	30
		2 Mbps	18.22	30
		5.5 Mbps	20.13	30
		11 Mbps	21.66	30
2437	6	1 Mbps	17.74	30
		2 Mbps	18.17	30
		5.5 Mbps	20.04	30
		11 Mbps	21.66	30
2462	11	1 Mbps	17.71	30
		2 Mbps	18.15	30
		5.5 Mbps	20.16	30
		11 Mbps	21.59	30

Conducted Output Power Measurements (802.11g Mode)


802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	6 Mbps	20.66	30
		9 Mbps	20.41	30
		12 Mbps	20.58	30
		18 Mbps	20.52	30
		24 Mbps	21.11	30
		36 Mbps	20.97	30
		48 Mbps	21.12	30
		54 Mbps	21.18	30
2437	6	6 Mbps	20.56	30
		9 Mbps	20.43	30
		12 Mbps	20.53	30
		18 Mbps	20.49	30
		24 Mbps	21.02	30
		36 Mbps	20.95	30
		48 Mbps	21.07	30
		54 Mbps	21.18	30
2462	11	6 Mbps	20.31	30
		9 Mbps	20.21	30
		12 Mbps	20.31	30
		18 Mbps	20.28	30
		24 Mbps	21.01	30
		36 Mbps	20.87	30
		48 Mbps	20.85	30
		54 Mbps	20.90	30

Conducted Output Power Measurements (802.11n Mode)


802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	6.5 Mbps	20.45	30
		13 Mbps	20.57	30
		19.5 Mbps	20.58	30
		26 Mbps	20.96	30
		39 Mbps	20.93	30
		52 Mbps	20.97	30
		58.5 Mbps	20.96	30
		65 Mbps	20.95	30
2437	6	6.5 Mbps	20.31	30
		13 Mbps	20.44	30
		19.5 Mbps	20.36	30
		26 Mbps	20.95	30
		39 Mbps	20.75	30
		52 Mbps	20.90	30
		58.5 Mbps	20.98	30
		65 Mbps	20.86	30
2462	11	6.5 Mbps	20.05	30
		13 Mbps	20.22	30
		19.5 Mbps	20.26	30
		26 Mbps	20.67	30
		39 Mbps	20.65	30
		52 Mbps	20.52	30
		58.5 Mbps	20.64	30
		65 Mbps	20.61	30

■ RESULT PLOTS


Conducted Output Power (802.11b-CH 1) 1Mbps

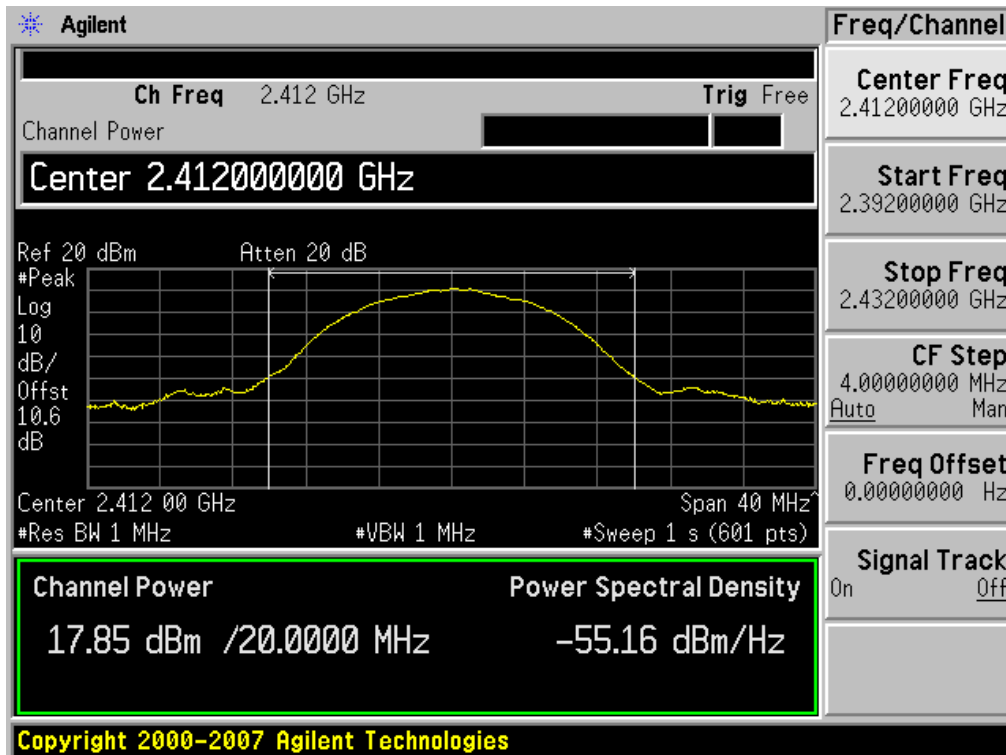


Conducted Output Power (802.11b-CH 1) 2Mbps

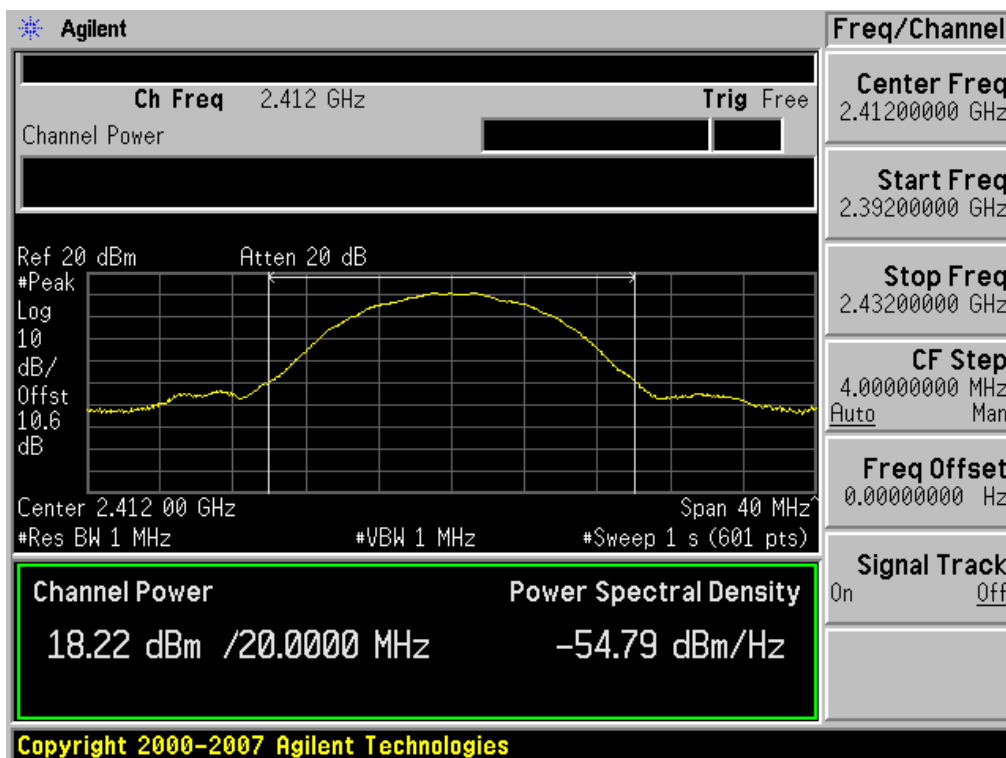


Conducted Output Power (802.11b-CH 1) 5.5Mbps

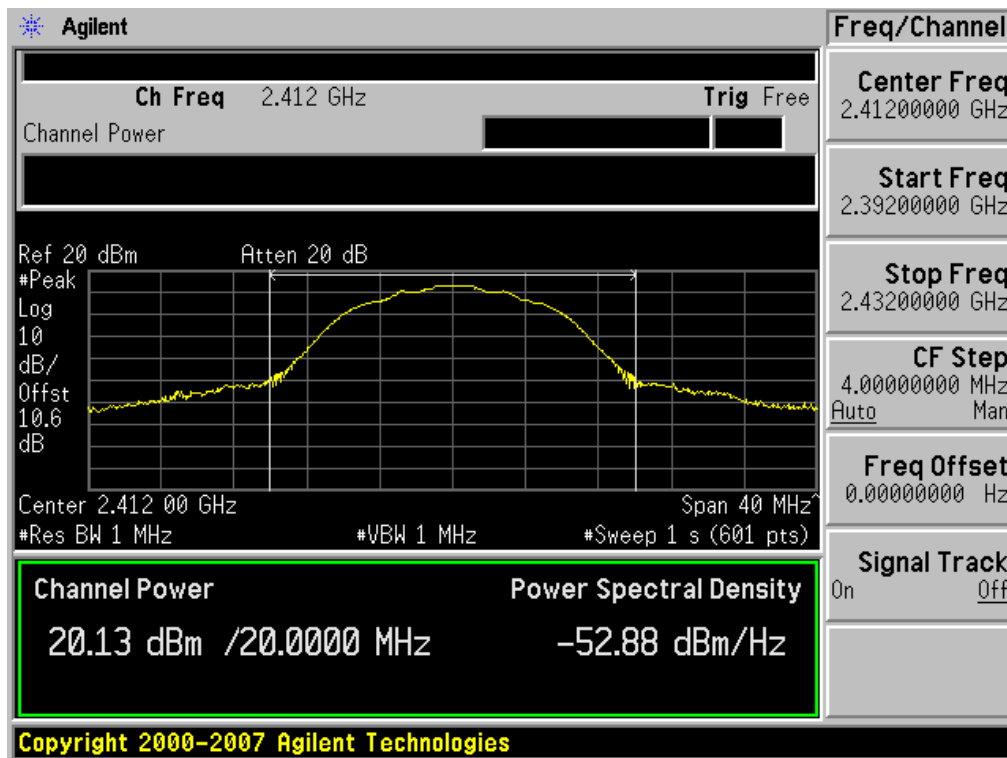


Conducted Output Power (802.11b-CH 1) 11Mbps

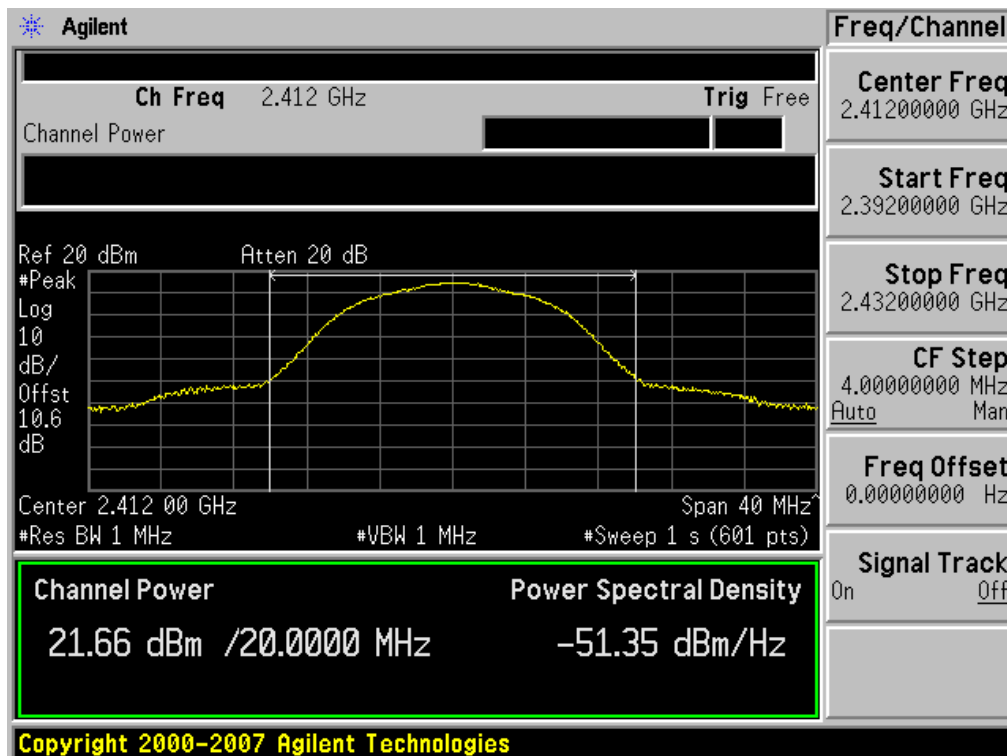


Conducted Output Power (802.11b-CH 6) 1Mbps

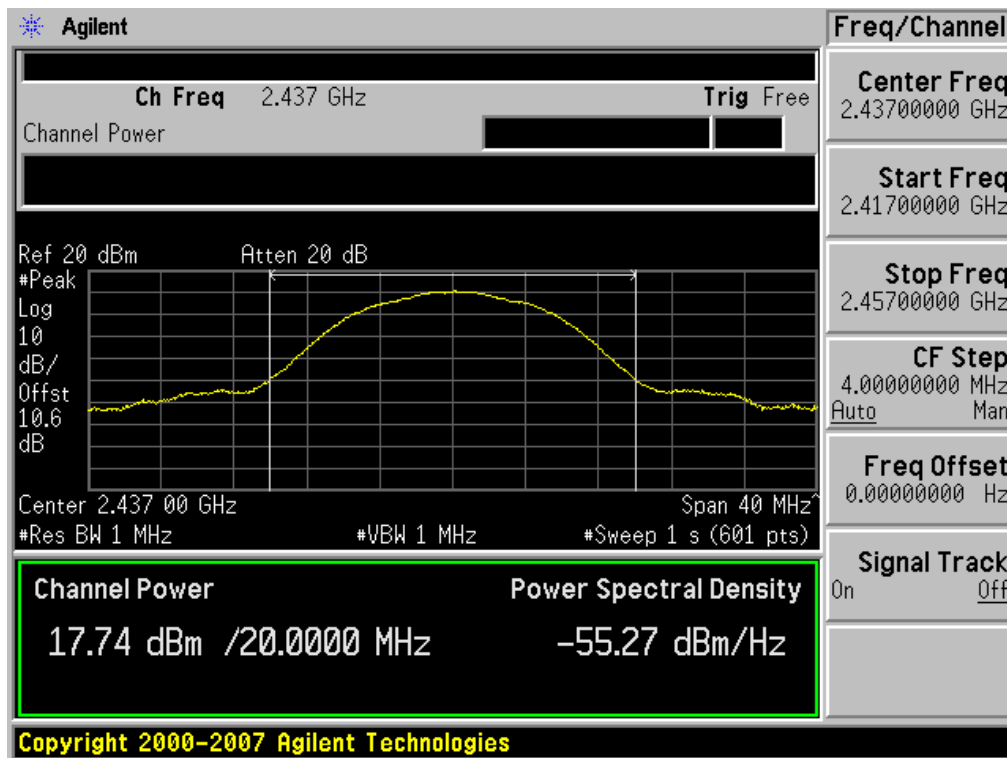


Conducted Output Power (802.11b-CH 6) 2Mbps

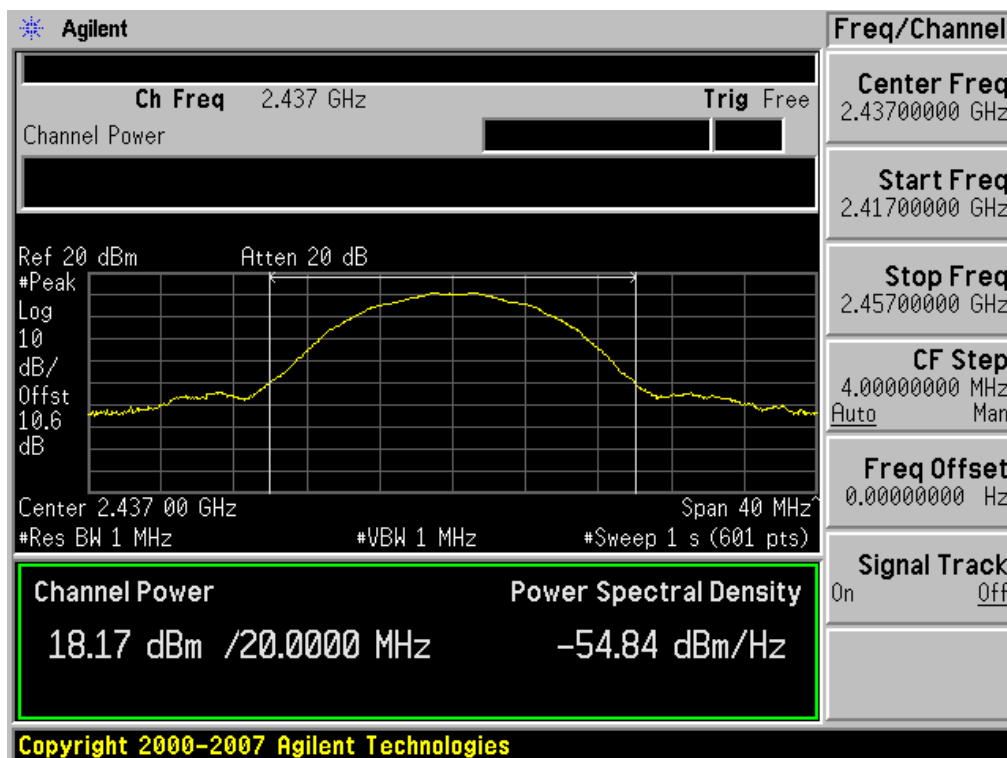


Conducted Output Power (802.11b-CH 6) 5.5Mbps

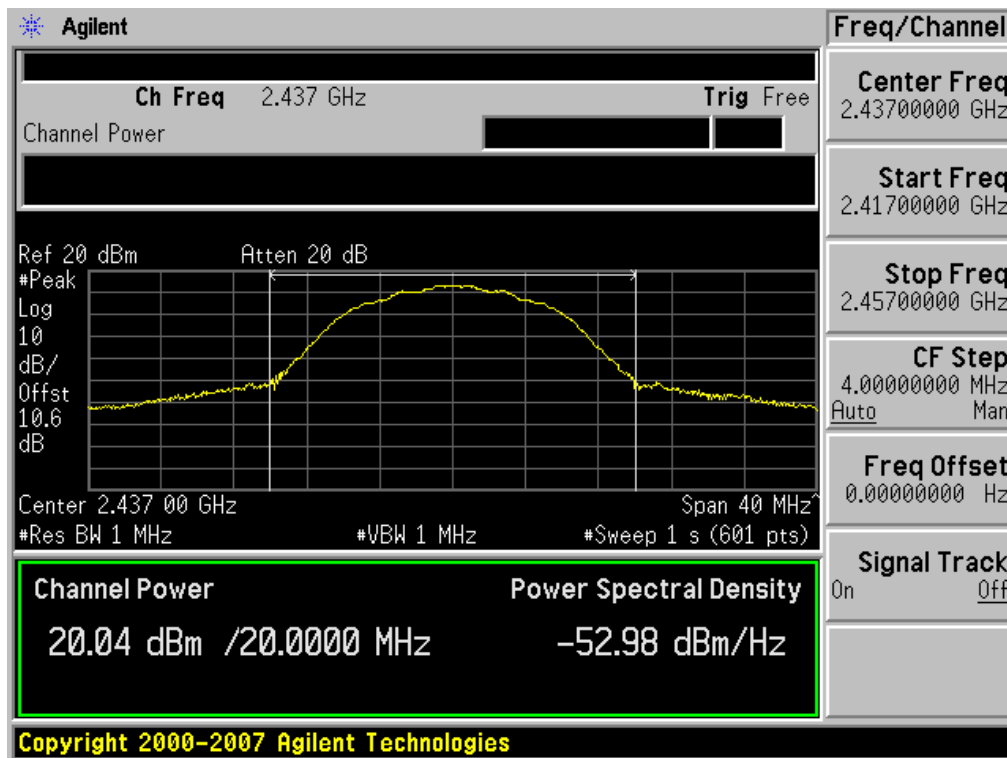


Conducted Output Power (802.11b-CH 6) 11Mbps

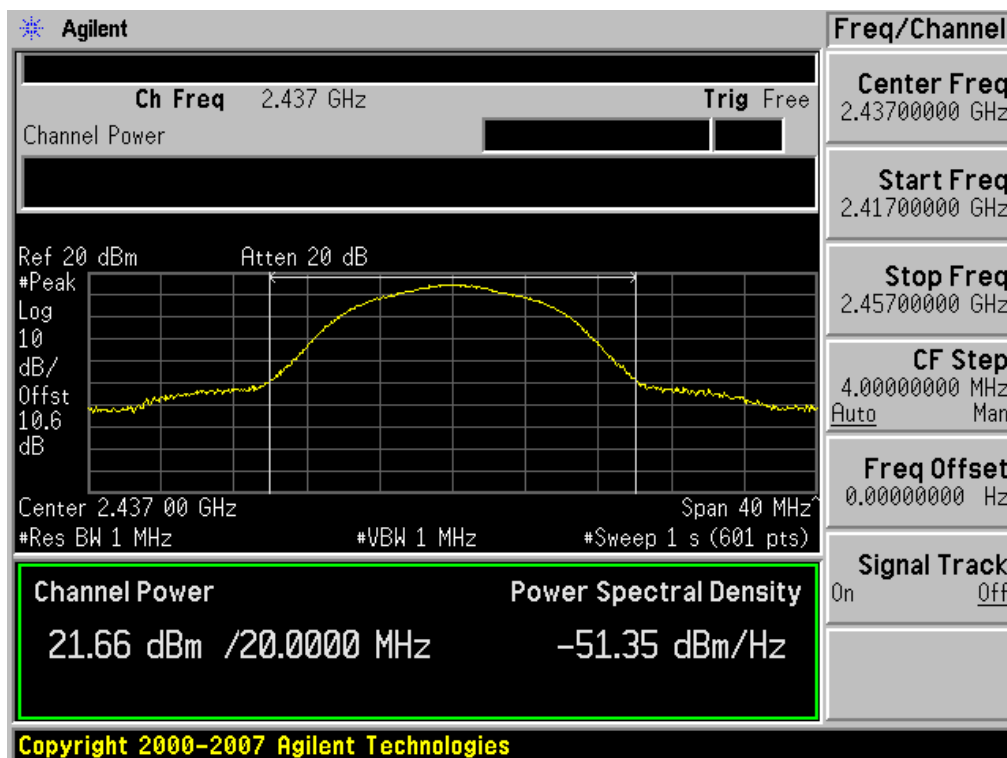


Conducted Output Power (802.11b-CH 11) 1Mbps

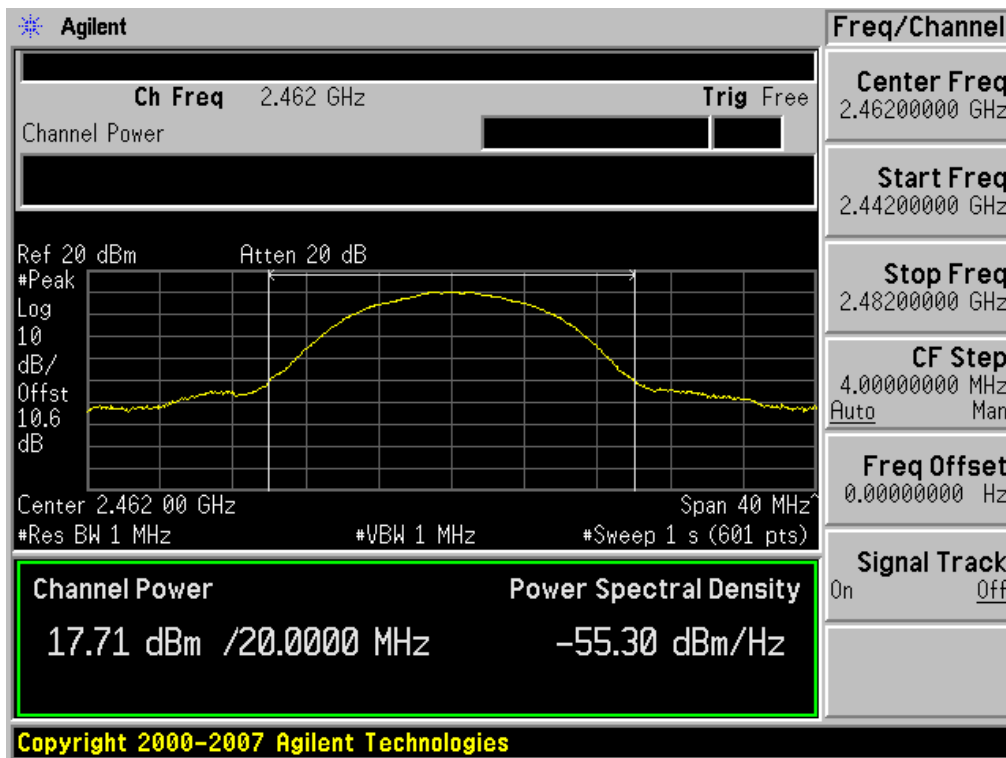


Conducted Output Power (802.11b-CH 11) 2Mbps

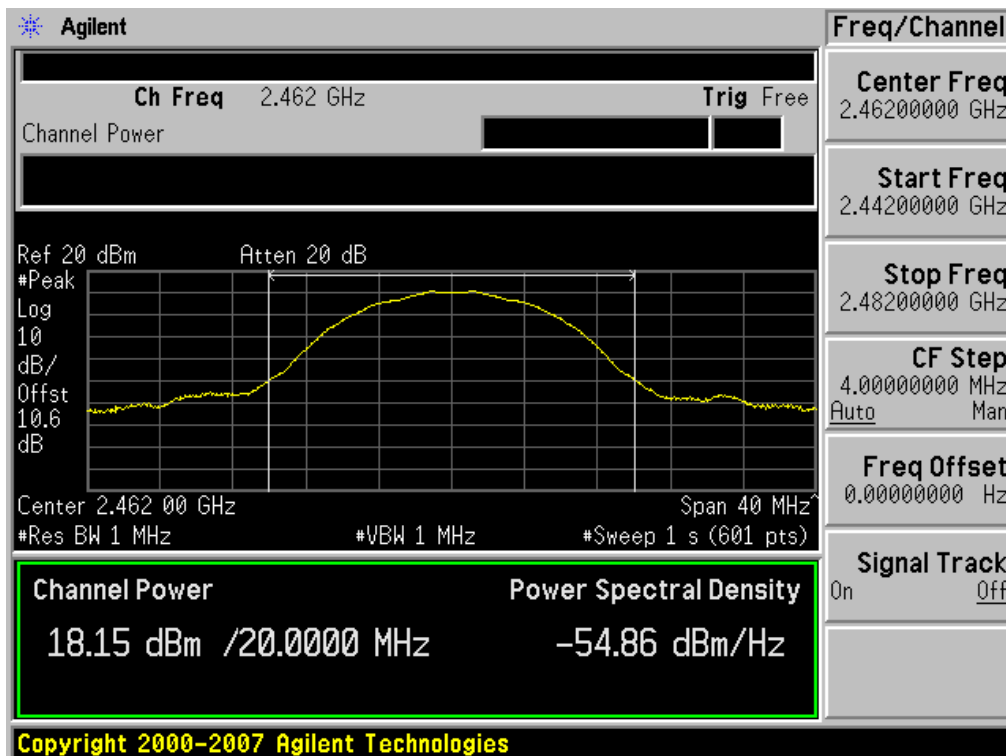


Conducted Output Power (802.11b-CH 11) 5.5Mbps

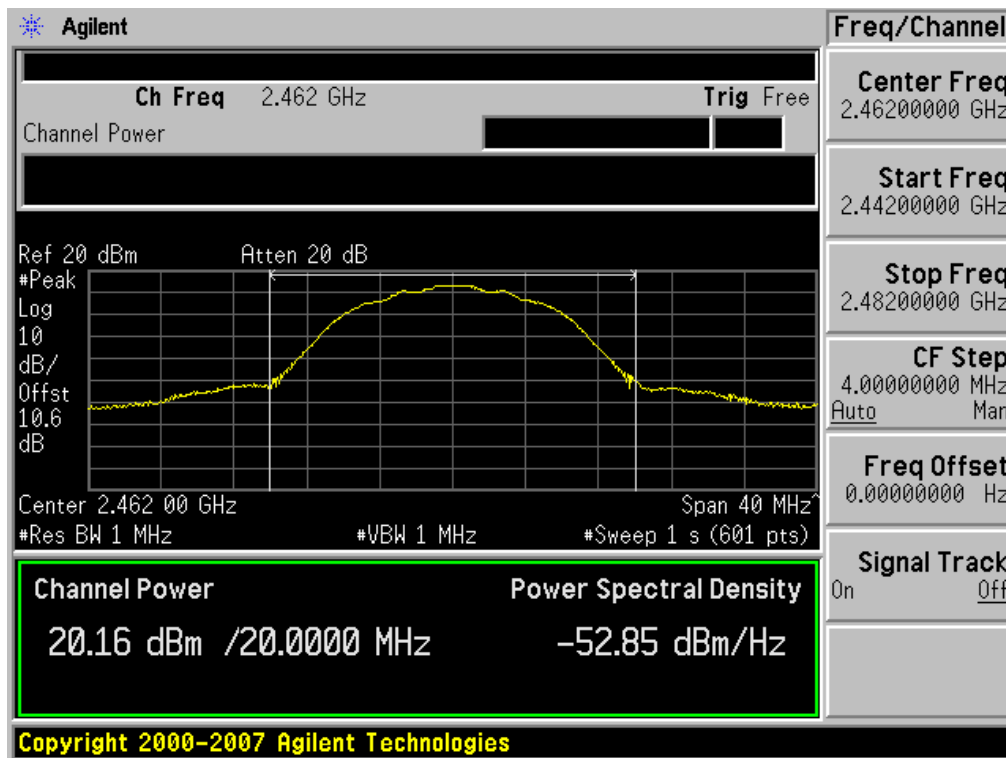


Conducted Output Power (802.11b-CH 11) 11Mbps

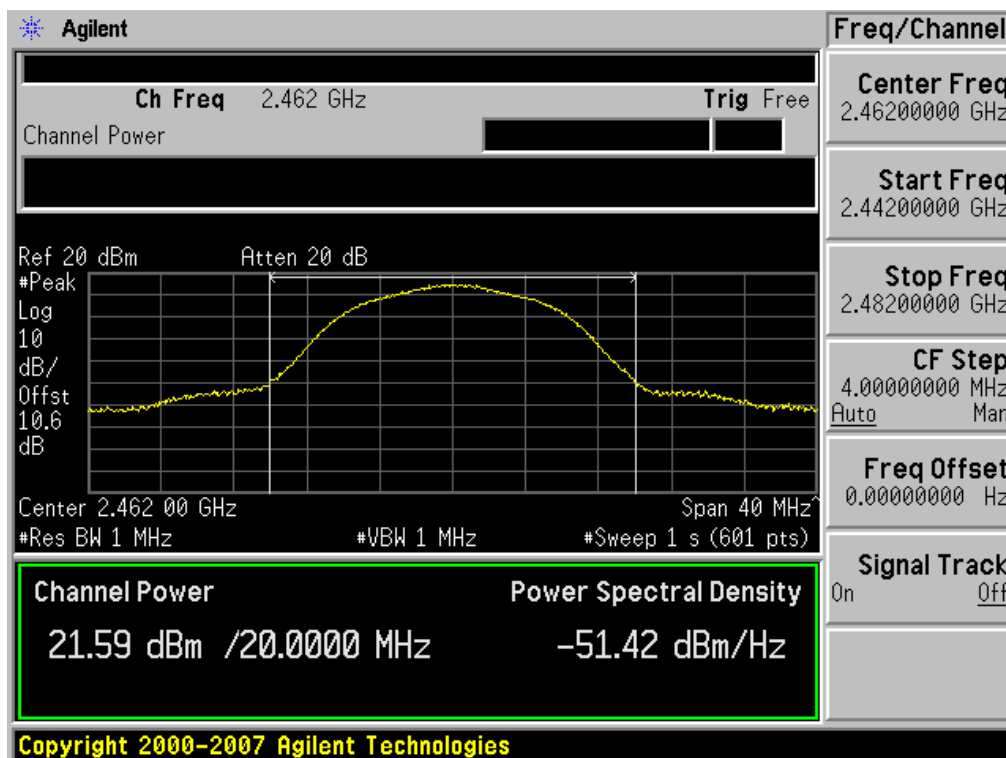

Conducted Output Power (802.11g-CH 1) 6Mbps

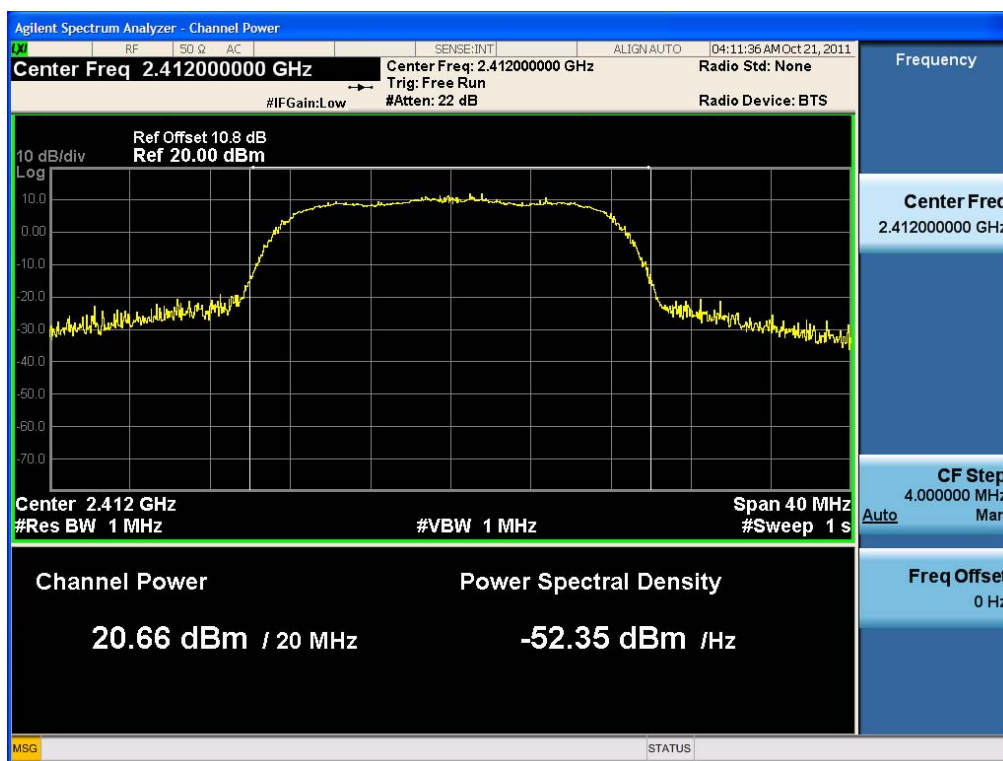

Conducted Output Power (802.11g-CH 1) 9Mbps

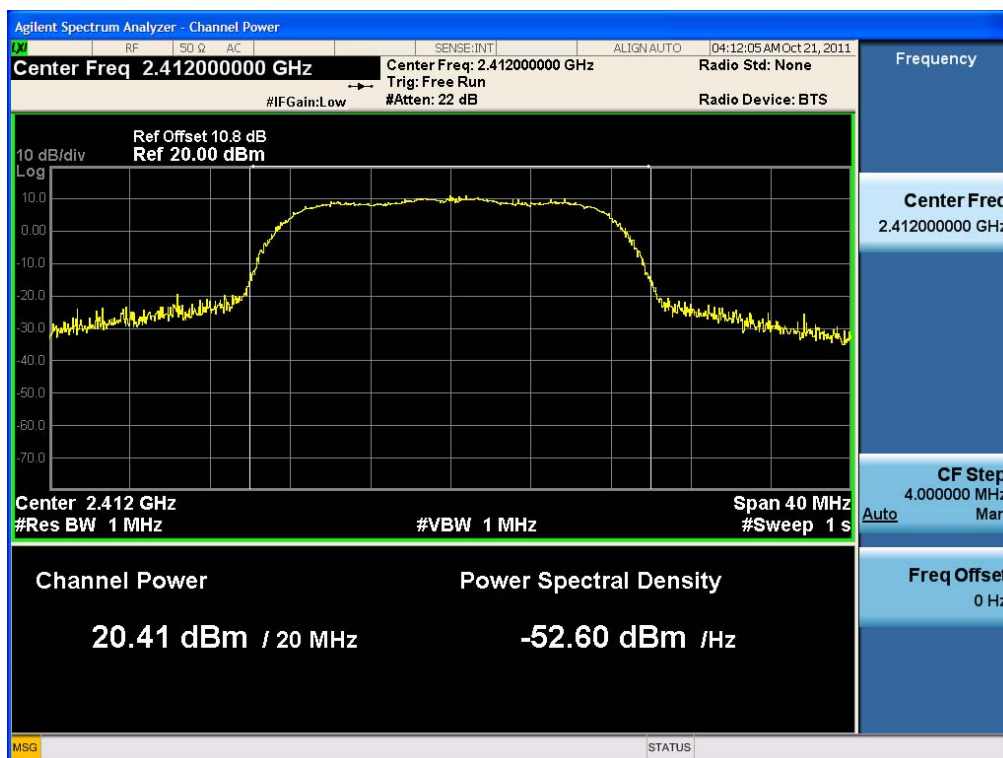

Conducted Output Power (802.11g-CH 1) 12Mbps



Conducted Output Power (802.11g-CH 1) 18Mbps




Conducted Output Power (802.11g-CH 1) 24Mbps



Conducted Output Power (802.11g-CH 1) 36Mbps



Conducted Output Power (802.11g-CH 1) 48Mbps

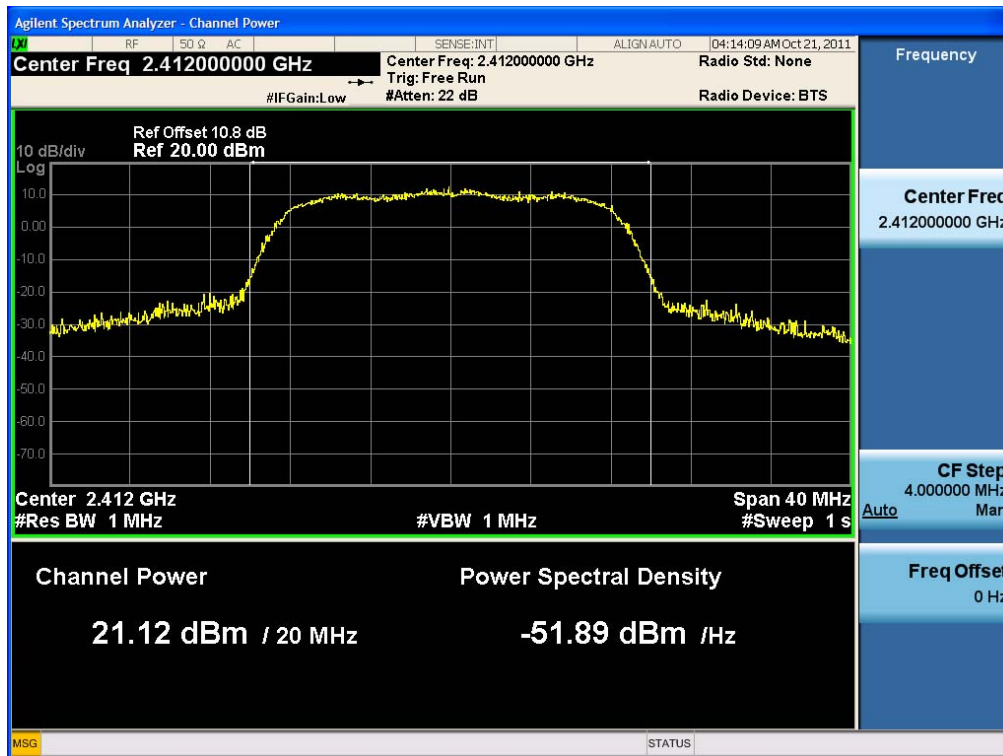


Conducted Output Power (802.11g-CH 1) 54Mbps



Conducted Output Power (802.11g-CH 6) 6Mbps



Conducted Output Power (802.11g-CH 6) 9Mbps

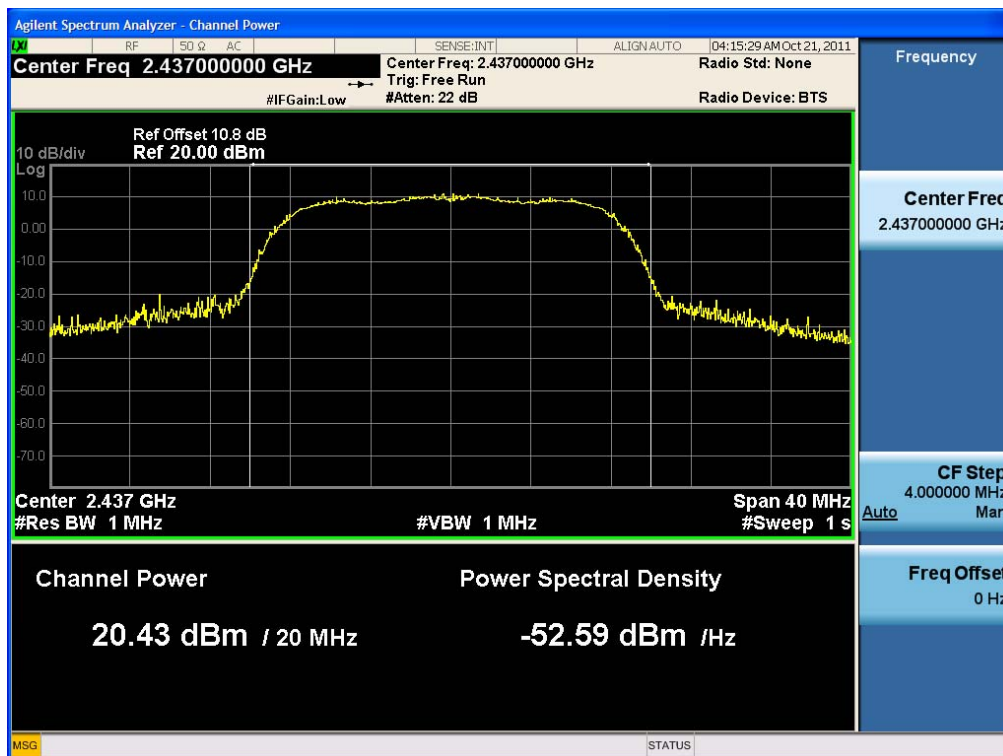

Conducted Output Power (802.11g-CH 6) 12Mbps



Conducted Output Power (802.11g-CH 6) 18Mbps



Conducted Output Power (802.11g-CH 6) 24Mbps



Conducted Output Power (802.11g-CH 6) 36Mbps




Conducted Output Power (802.11g-CH 6) 48Mbps




Conducted Output Power (802.11g-CH 6) 54Mbps



Conducted Output Power (802.11g-CH 11) 6Mbps

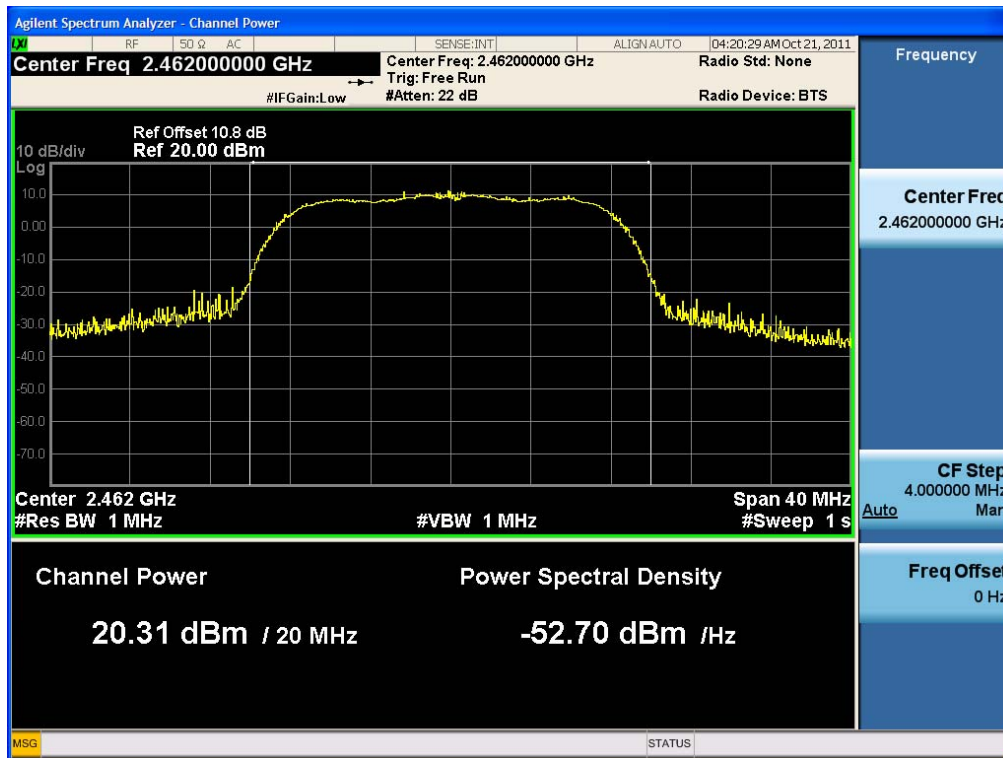

Conducted Output Power (802.11g-CH 11) 9Mbps

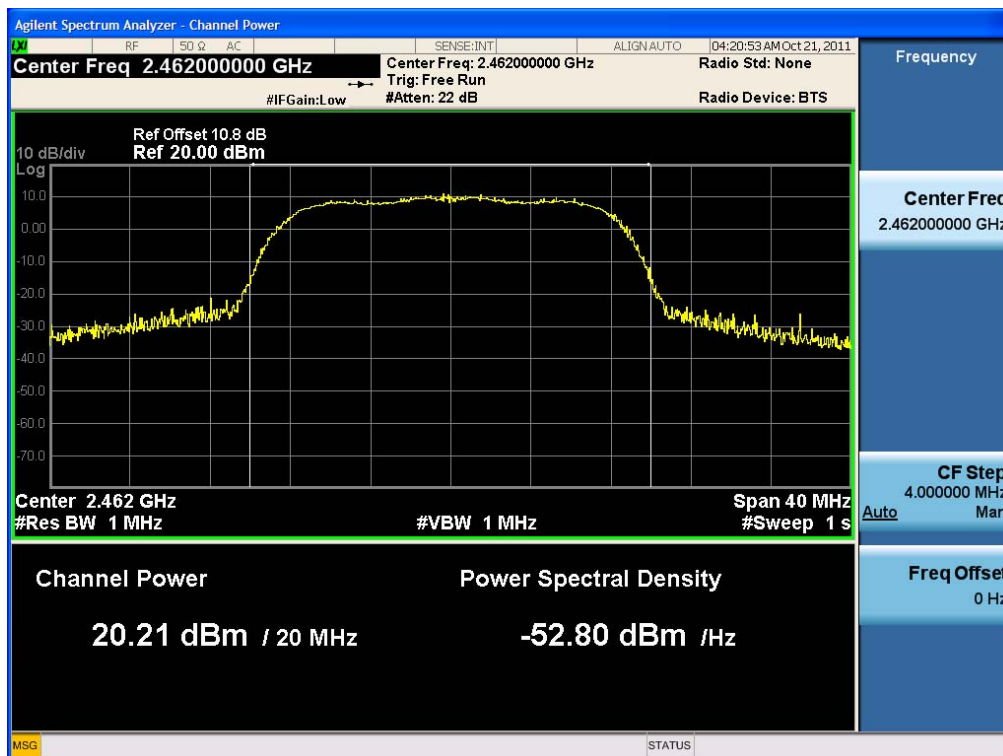


Conducted Output Power (802.11g-CH 11) 12Mbps



Conducted Output Power (802.11g-CH 11) 18Mbps




Conducted Output Power (802.11g-CH 11) 24Mbps

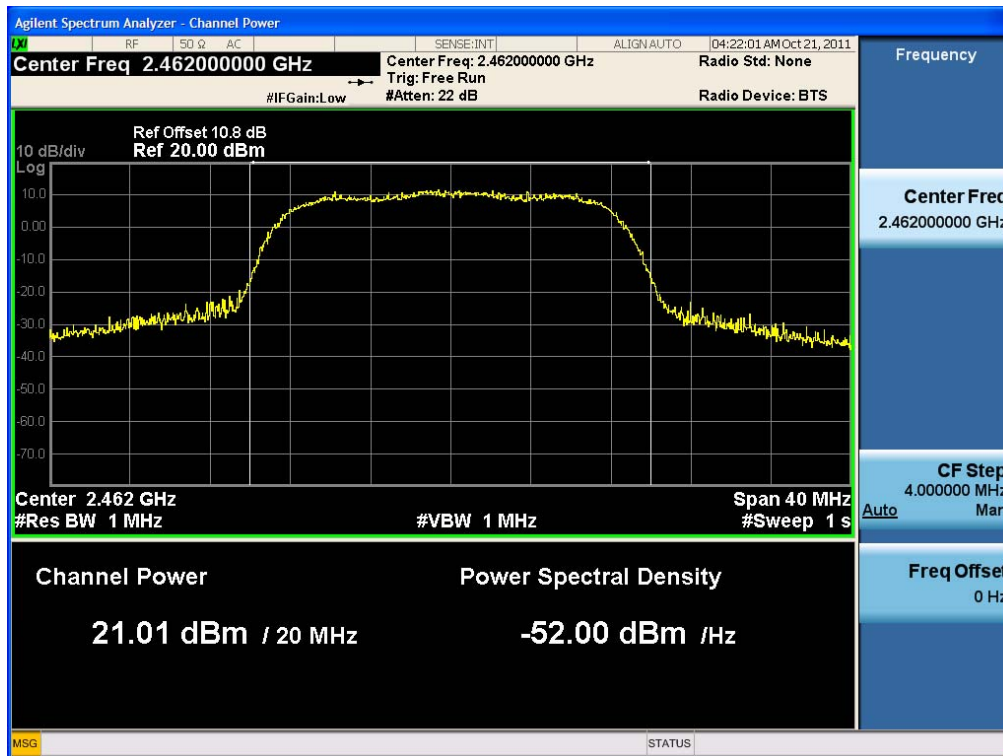

Conducted Output Power (802.11g-CH 11) 36Mbps



Conducted Output Power (802.11g-CH 11) 48Mbps

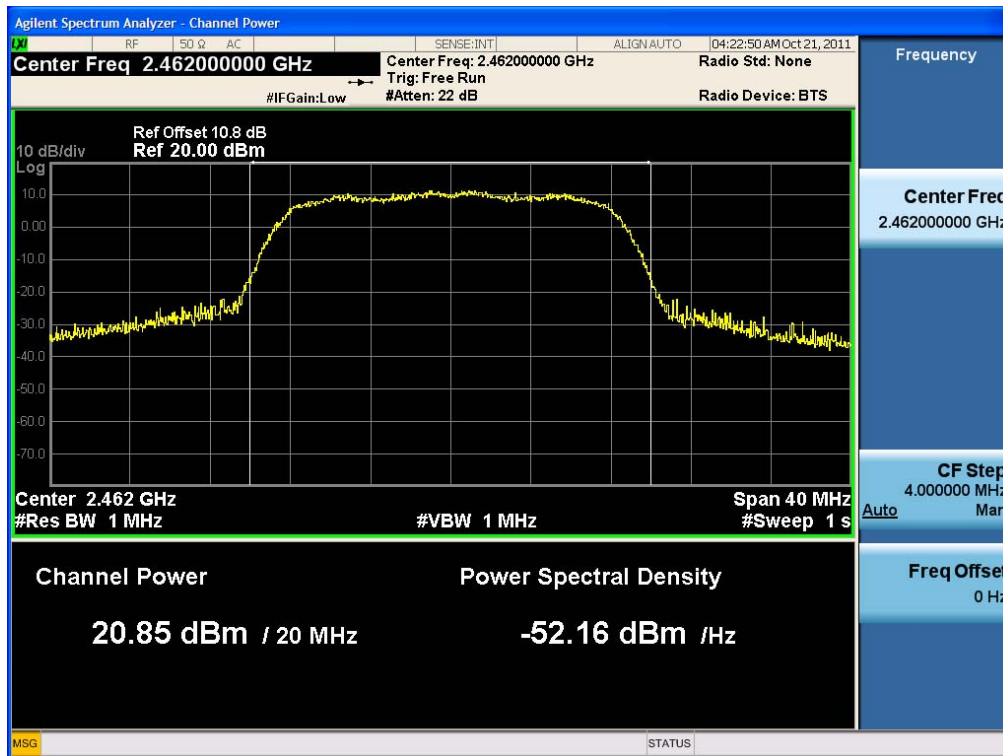

Conducted Output Power (802.11g-CH 11) 54Mbps

