

SAR Plots

- Verification Plots
- SAR Test Plots

DIGITAL EMC CO., LTD

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d159

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.92 \text{ S/m}$; $\epsilon_r = 40.944$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(10.06, 10.06, 10.06); Calibrated: 9/24/2013; ; Electronics: DAE4 Sn1396

Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-11; Ambient Temp: 21.1; Tissue Temp: 21.4

835 MHz System Verification


Area Scan (51x121x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.06 dB

Peak SAR (extrapolated) = 3.66 W/kg

SAR(1 g) = 2.34 W/kg; SAR(10 g) = 1.51 W/kg

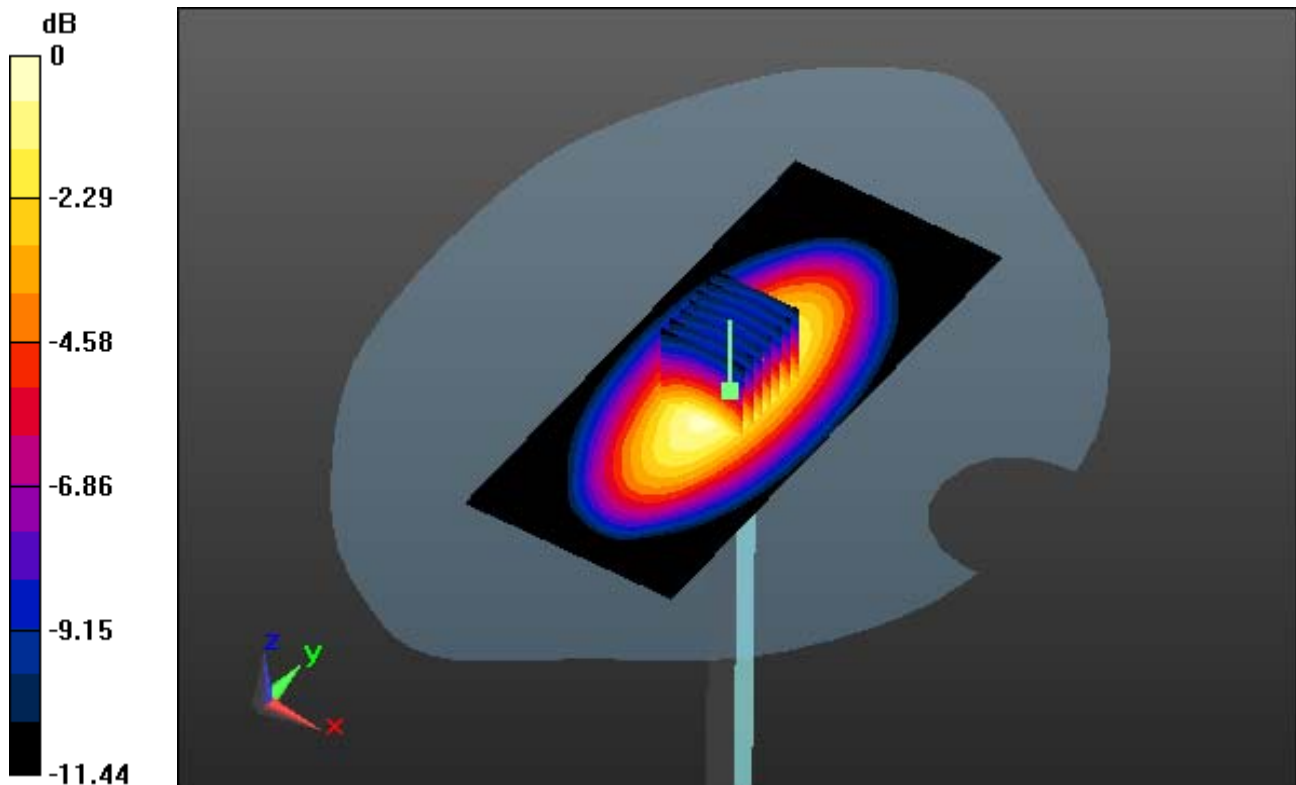

0 dB = 3.02 W/kg

DIGITAL EMC CO., LTD

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d159

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.92$ S/m; $\epsilon_r = 40.944$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(10.06, 10.06, 10.06); Calibrated: 9/24/2013; ; Electronics: DAE4 Sn1396

Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-11; Ambient Temp: 21.1; Tissue Temp: 21.4

835 MHz System Verification


Area Scan (51x121x1): Interpolated grid: dx=15mm, dy=15mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = -0.06 dB

Peak SAR (extrapolated) = 3.66 W/kg

SAR(1 g) = 2.34 W/kg; SAR(10 g) = 1.51 W/kg

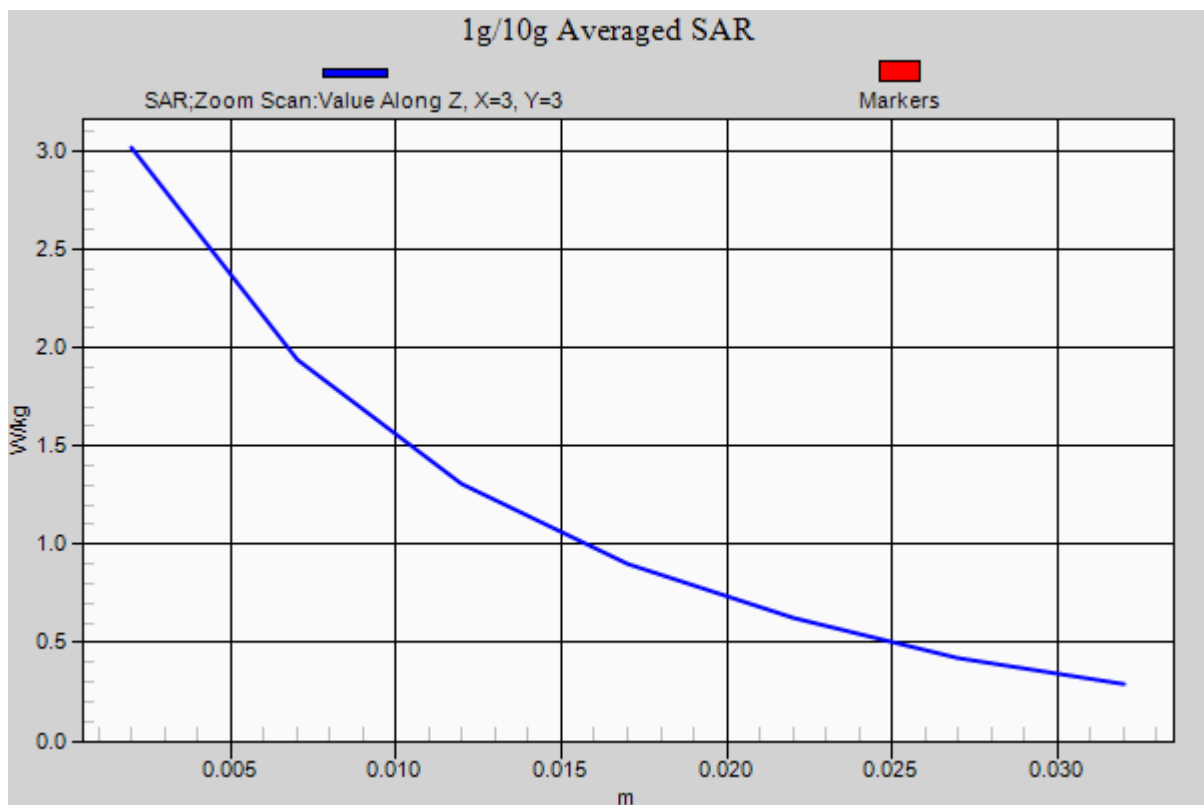

DIGITAL EMC CO., LTD

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d159

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.971 \text{ S/m}$; $\epsilon_r = 55.036$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(9.79, 9.79, 9.79); Calibrated: 9/24/2013; ; Electronics: DAE4 Sn1396

Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-12; Ambient Temp: 21.3; Tissue Temp: 21.6

835 MHz System Verification


Area Scan (61x81x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.04 dB

Peak SAR (extrapolated) = 3.59 W/kg

SAR(1 g) = 2.38 W/kg; SAR(10 g) = 1.56 W/kg

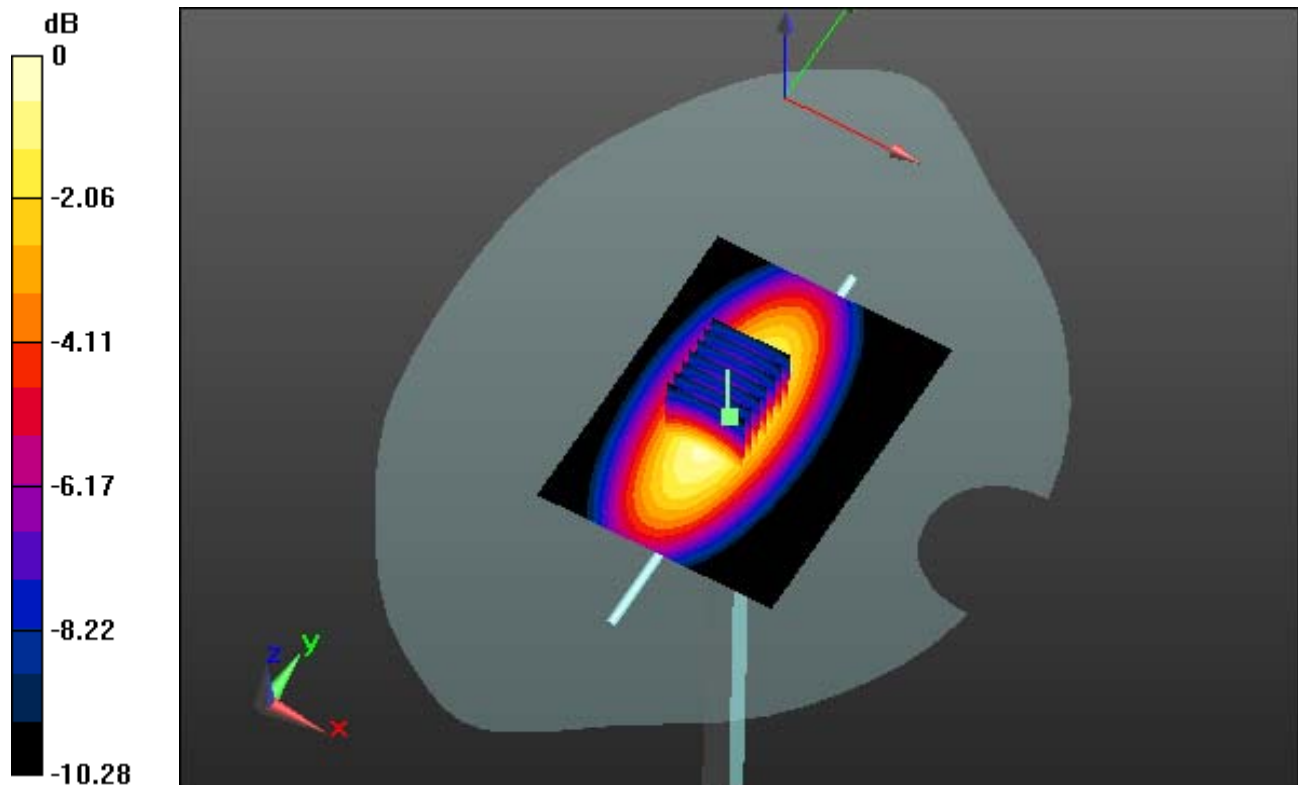

0 dB = 2.90 W/kg

DIGITAL EMC CO., LTD

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d159

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.971 \text{ S/m}$; $\epsilon_r = 55.036$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(9.79, 9.79, 9.79); Calibrated: 9/24/2013; ; Electronics: DAE4 Sn1396

Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-12; Ambient Temp: 21.3; Tissue Temp: 21.6

835 MHz System Verification


Area Scan (61x81x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.04 dB

Peak SAR (extrapolated) = 3.59 W/kg

SAR(1 g) = 2.38 W/kg; SAR(10 g) = 1.56 W/kg

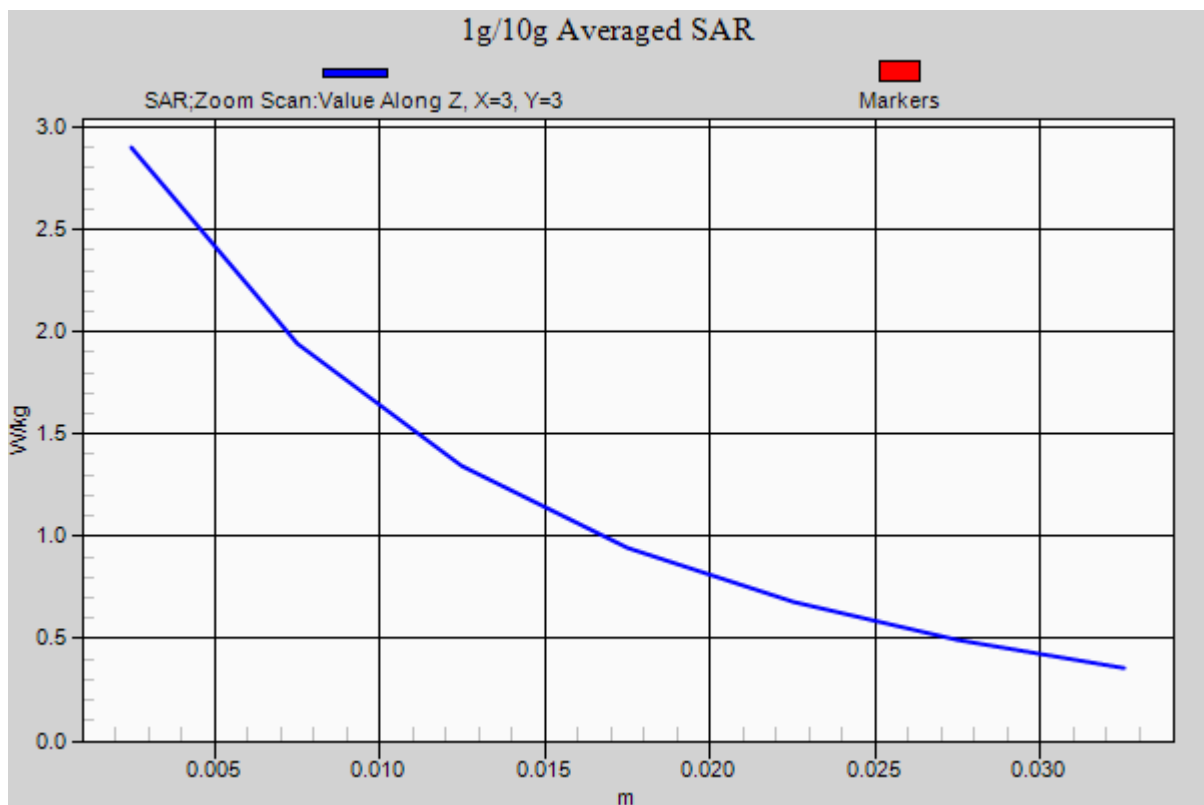

DIGITAL EMC CO., LTD

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d176

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 39.87$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(8.25, 8.25, 8.25); Calibrated: 9/24/2013; ; Electronics: DAE4 Sn1396

Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-13; Ambient Temp: 21.0; Tissue Temp: 21.3

1900 MHz System Verification


Area Scan (61x91x1): Interpolated grid: dx=15mm, dy=15mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.04 dB

Peak SAR (extrapolated) = 17.2 W/kg

SAR(1 g) = 9.64 W/kg; SAR(10 g) = 5.02 W/kg

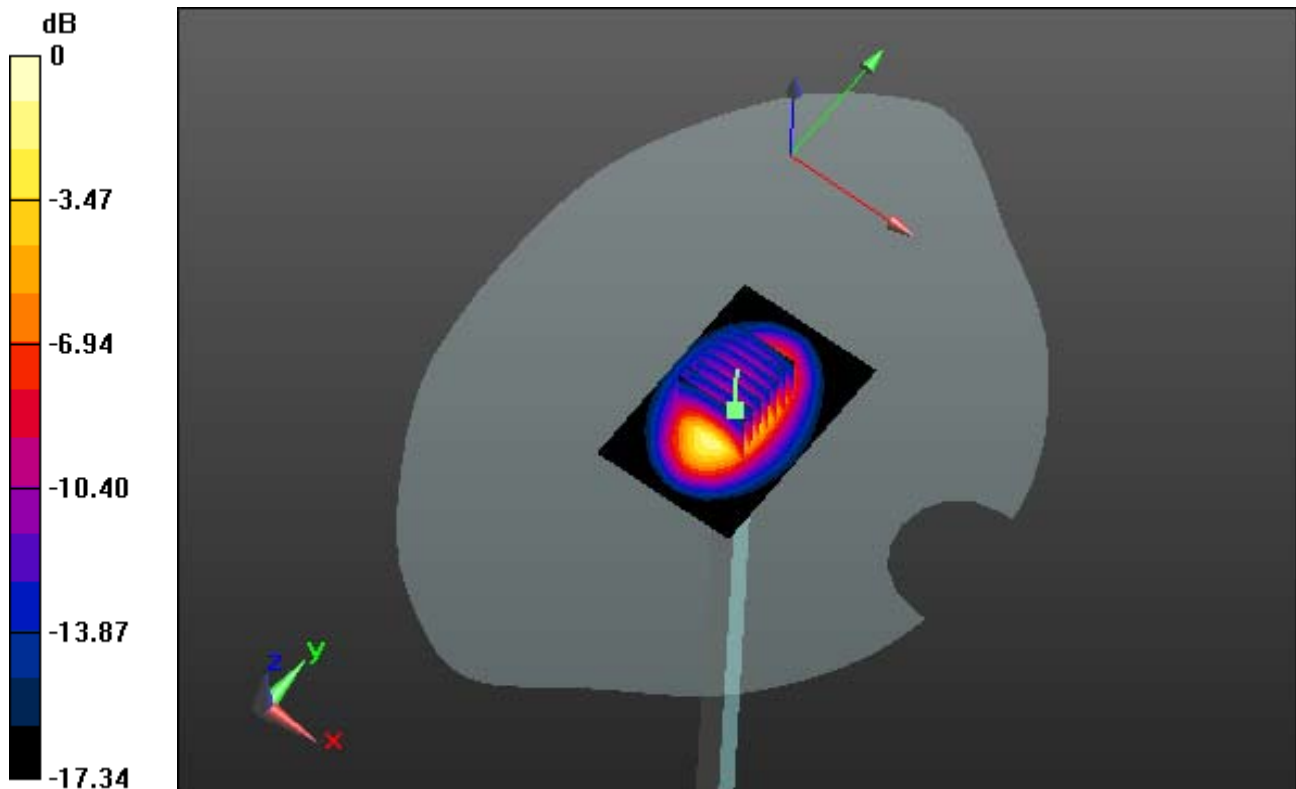

0 dB = 12.7 W/kg

DIGITAL EMC CO., LTD

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d176

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1900$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 39.87$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(8.25, 8.25, 8.25); Calibrated: 9/24/2013; ; Electronics: DAE4 Sn1396
Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-13; Ambient Temp: 21.0; Tissue Temp: 21.3

1900 MHz System Verification


Area Scan (61x91x1): Interpolated grid: dx=15mm, dy=15mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.04 dB

Peak SAR (extrapolated) = 17.2 W/kg

SAR(1 g) = 9.64 W/kg; SAR(10 g) = 5.02 W/kg

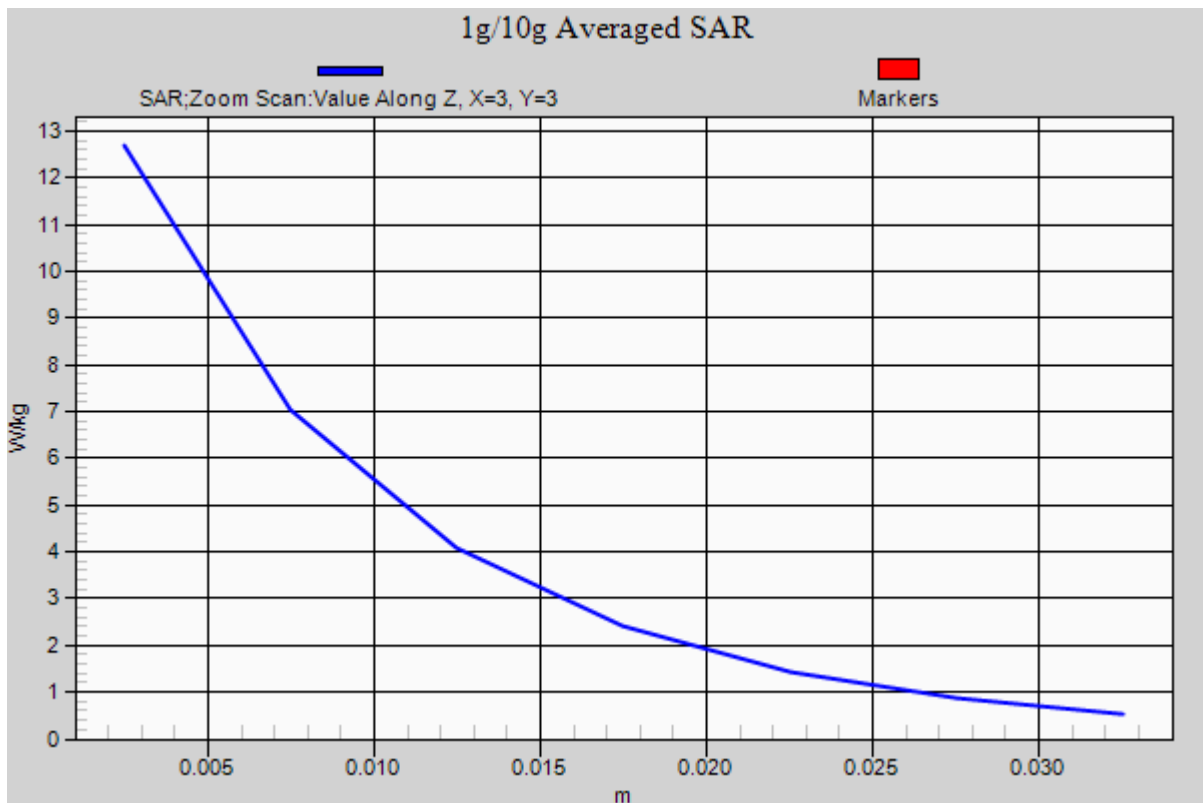

DIGITAL EMC CO., LTD

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d176

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.524$ S/m; $\epsilon_r = 52.28$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(7.79, 7.79, 7.79); Calibrated: 9/24/2013; ; Electronics: DAE4 Sn1396

Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-14; Ambient Temp: 21.2; Tissue Temp: 21.5

1900 MHz System Verification


Area Scan (61x91x1): Interpolated grid: dx=15mm, dy=15mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.08 dB

Peak SAR (extrapolated) = 19.7 W/kg

SAR(1 g) = 10.6 W/kg; SAR(10 g) = 5.41 W/kg

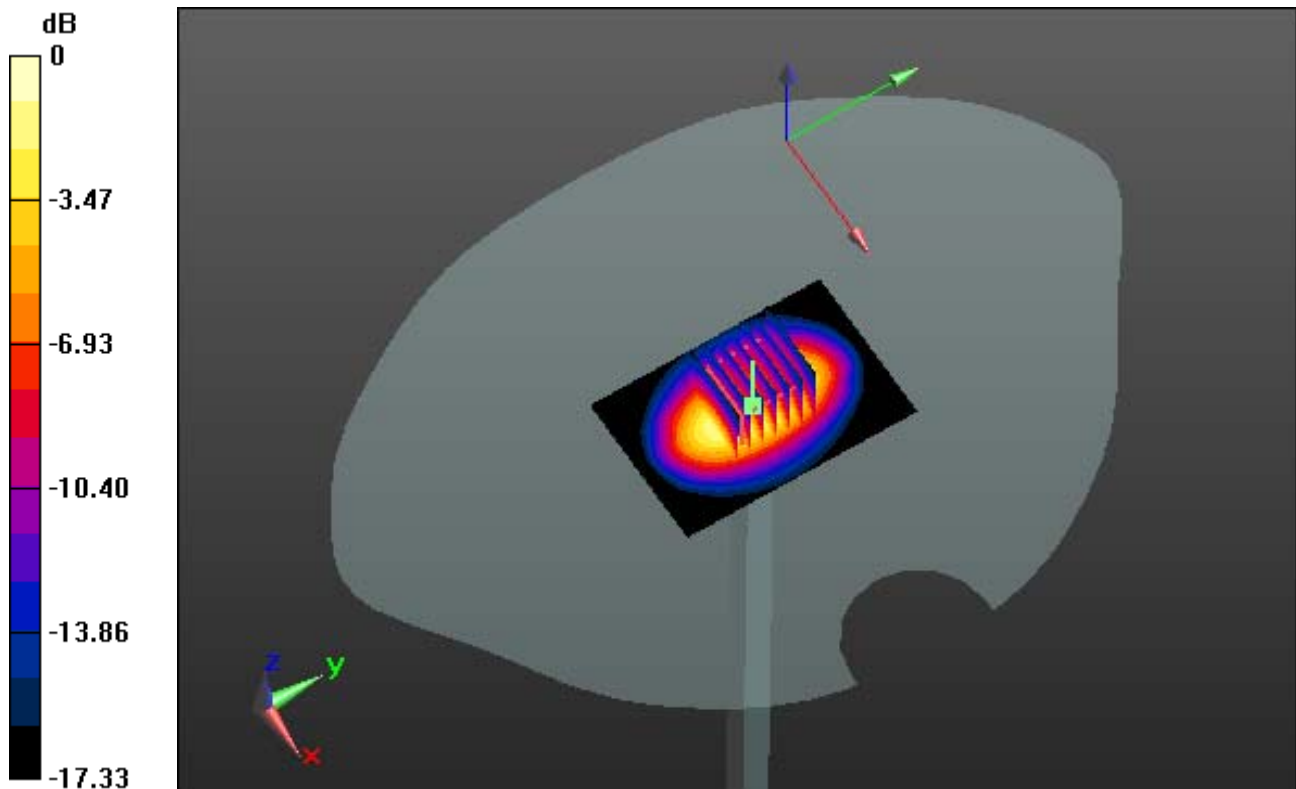

0 dB = 14.5 W/kg

DIGITAL EMC CO., LTD

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d176

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.524$ S/m; $\epsilon_r = 52.28$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(7.79, 7.79, 7.79); Calibrated: 9/24/2013; ; Electronics: DAE4 Sn1396

Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-14; Ambient Temp: 21.2; Tissue Temp: 21.5

1900 MHz System Verification


Area Scan (61x91x1): Interpolated grid: dx=15mm, dy=15mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.08 dB

Peak SAR (extrapolated) = 19.7 W/kg

SAR(1 g) = 10.6 W/kg; SAR(10 g) = 5.41 W/kg

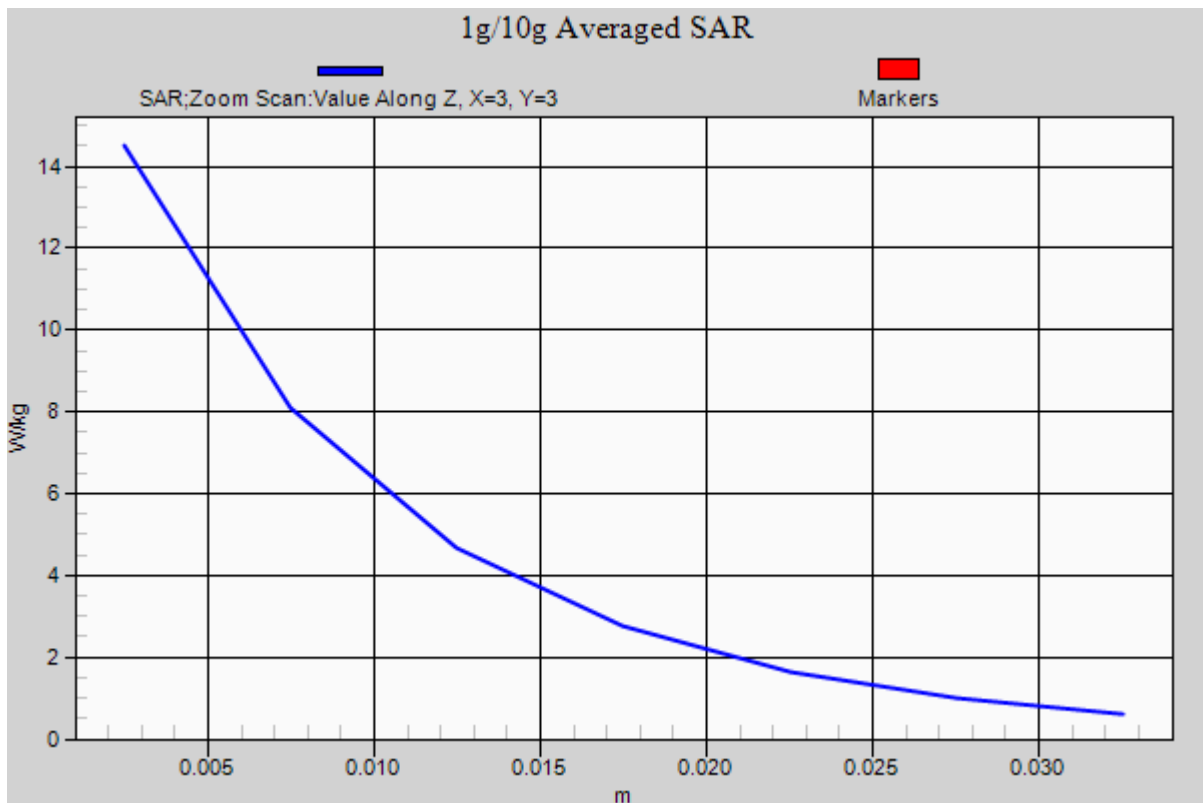

DIGITAL EMC CO., LTD

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d176

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.393 \text{ S/m}$; $\epsilon_r = 40.46$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(8.25, 8.25, 8.25); Calibrated: 9/24/2013; ; Electronics: DAE4 Sn1396

Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-18; Ambient Temp: 20.9; Tissue Temp: 21.4

1900 MHz System Verification


Area Scan (61x91x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.03 dB

Peak SAR (extrapolated) = 19.7 W/kg

SAR(1 g) = 10.5 W/kg; SAR(10 g) = 5.4 W/kg

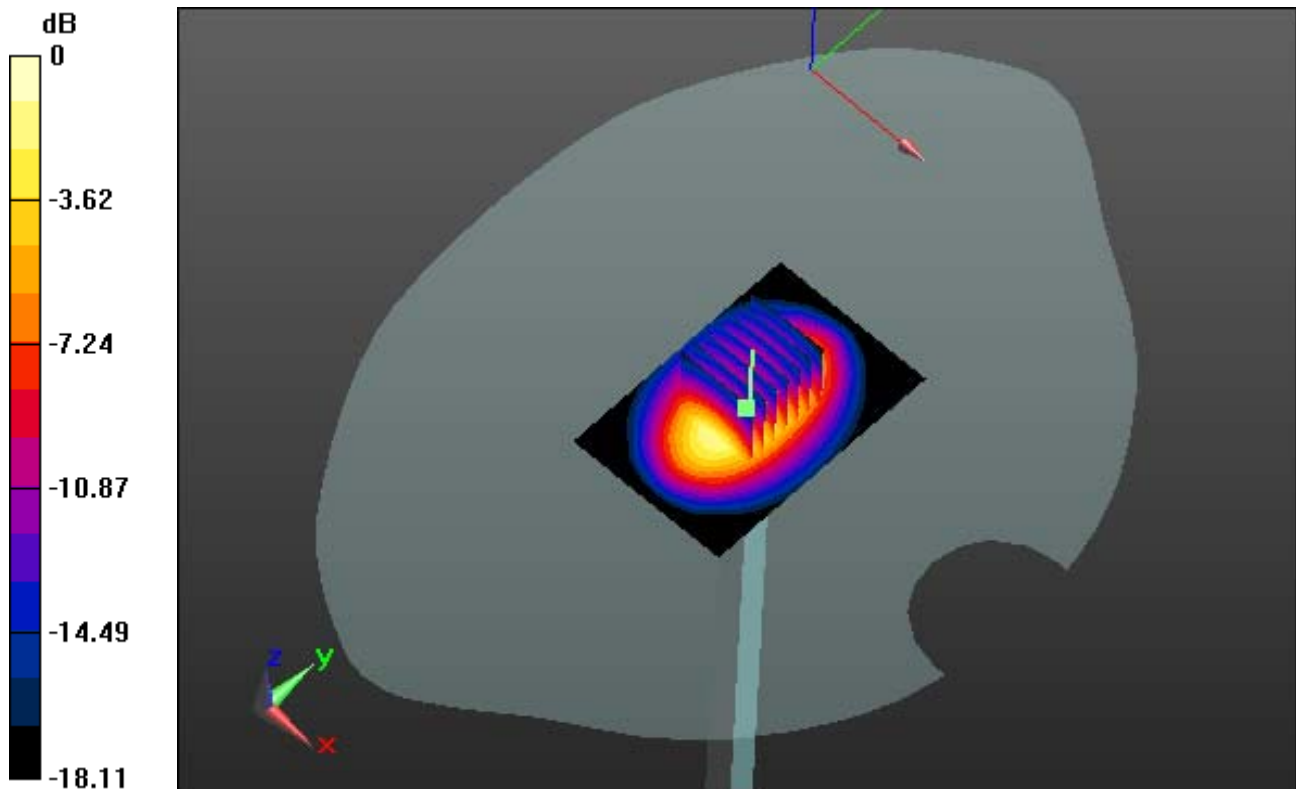

0 dB = 14.3 W/kg

DIGITAL EMC CO., LTD

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d176

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.393$ S/m; $\epsilon_r = 40.46$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(8.25, 8.25, 8.25); Calibrated: 9/24/2013; ; Electronics: DAE4 Sn1396

Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-18; Ambient Temp: 20.9; Tissue Temp: 21.4

1900 MHz System Verification


Area Scan (61x91x1): Interpolated grid: dx=15mm, dy=15mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.03 dB

Peak SAR (extrapolated) = 19.7 W/kg

SAR(1 g) = 10.5 W/kg; SAR(10 g) = 5.4 W/kg

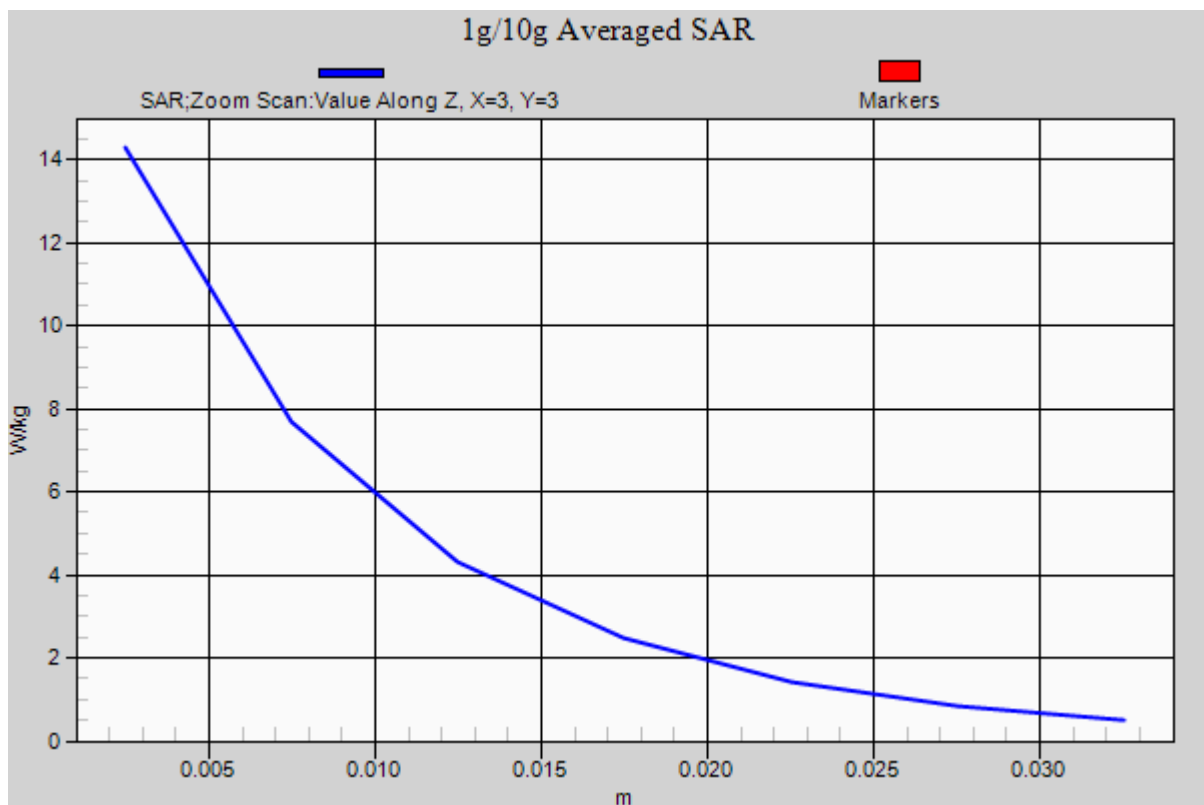

DIGITAL EMC CO., LTD

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d176

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.518$ S/m; $\epsilon_r = 52.173$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(7.79, 7.79, 7.79); Calibrated: 9/24/2013; ; Electronics: DAE4 Sn1396

Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-18; Ambient Temp: 20.9; Tissue Temp: 21.4

1900 MHz System Verification


Area Scan (61x91x1): Interpolated grid: dx=15mm, dy=15mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.04 dB

Peak SAR (extrapolated) = 19.6 W/kg

SAR(1 g) = 10.6 W/kg; SAR(10 g) = 5.49 W/kg

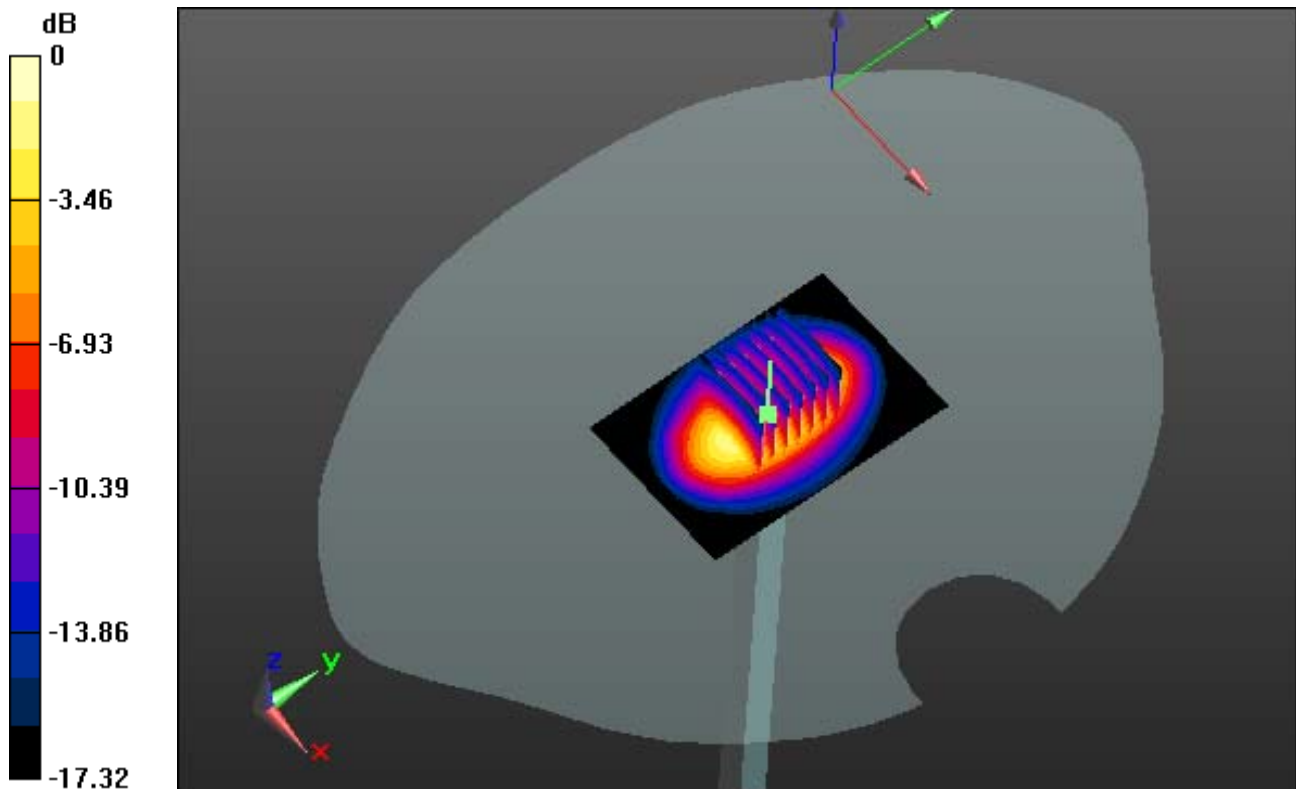

0 dB = 14.4 W/kg

DIGITAL EMC CO., LTD

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d176

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.518$ S/m; $\epsilon_r = 52.173$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(7.79, 7.79, 7.79); Calibrated: 9/24/2013; ; Electronics: DAE4 Sn1396

Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-18; Ambient Temp: 20.9; Tissue Temp: 21.4

1900 MHz System Verification


Area Scan (61x91x1): Interpolated grid: dx=15mm, dy=15mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.04 dB

Peak SAR (extrapolated) = 19.6 W/kg

SAR(1 g) = 10.6 W/kg; SAR(10 g) = 5.49 W/kg

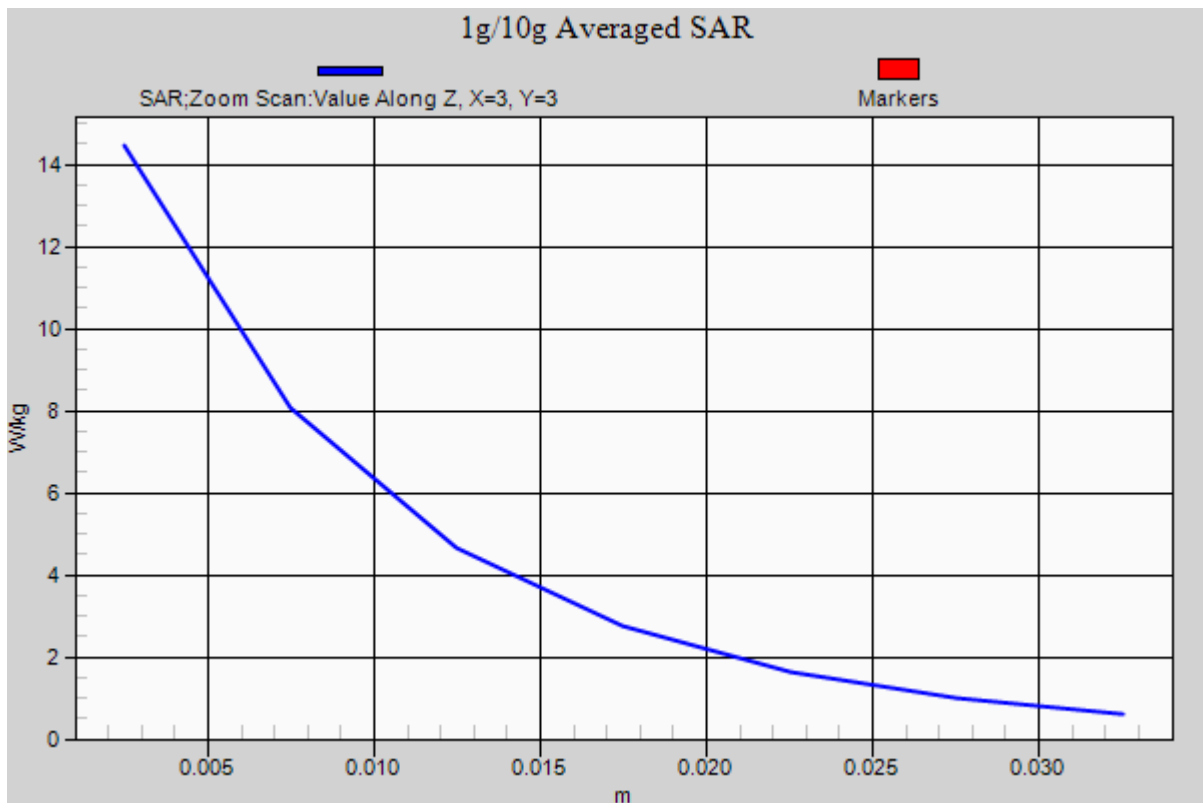

DIGITAL EMC CO., LTD

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:920

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.776$ S/m; $\epsilon_r = 37.985$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(7.44, 7.44, 7.44); Calibrated: 9/24/2013; ; Electronics: DAE4 Sn1396

Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-20; Ambient Temp: 20.7; Tissue Temp: 21.1

2450 MHz System Verification


Area Scan (61x81x1): Interpolated grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.05 dB

Peak SAR (extrapolated) = 29.0 W/kg

SAR(1 g) = 13.8 W/kg; SAR(10 g) = 6.39 W/kg

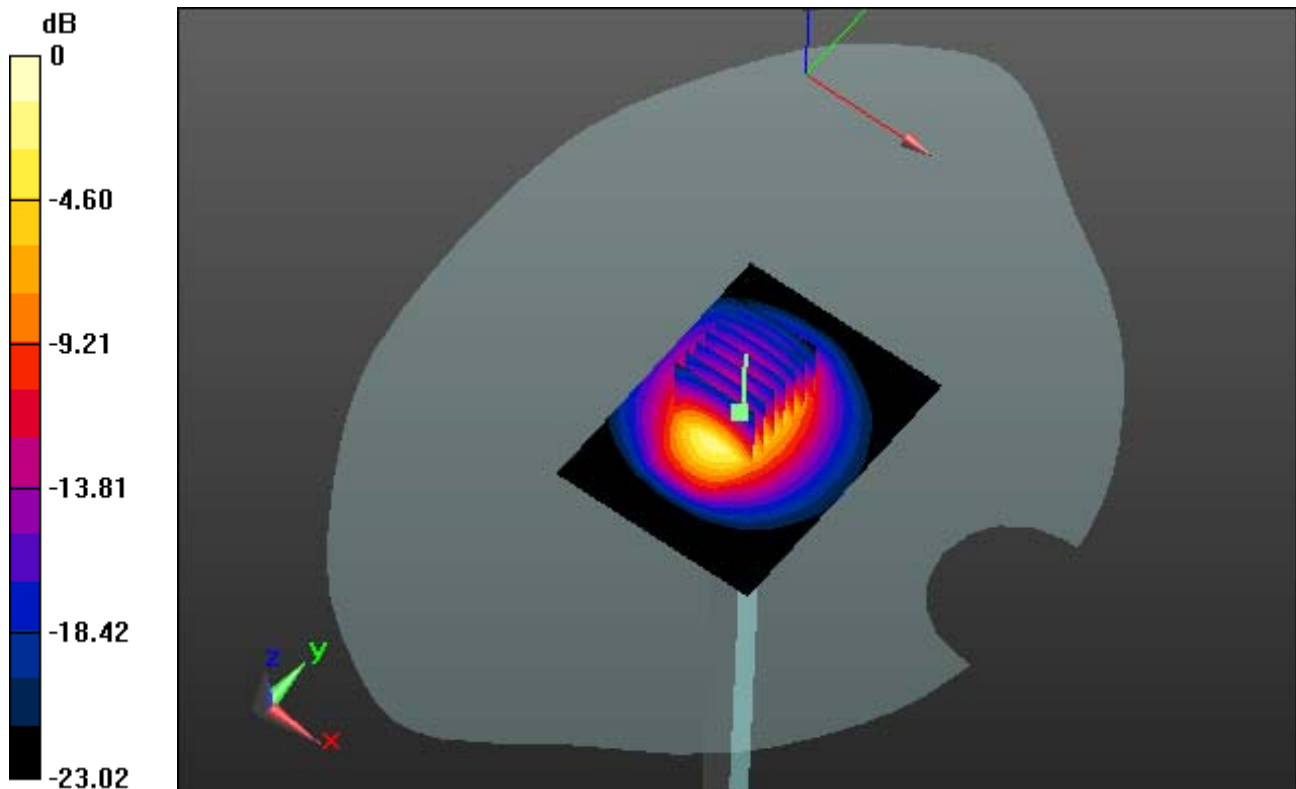

0 dB = 21.0 W/kg

DIGITAL EMC CO., LTD

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:920

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.776$ S/m; $\epsilon_r = 37.985$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(7.44, 7.44, 7.44); Calibrated: 9/24/2013; ; Electronics: DAE4 Sn1396

Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-20; Ambient Temp: 20.7; Tissue Temp: 21.1

2450 MHz System Verification


Area Scan (61x81x1): Interpolated grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.05 dB

Peak SAR (extrapolated) = 29.0 W/kg

SAR(1 g) = 13.8 W/kg; SAR(10 g) = 6.39 W/kg

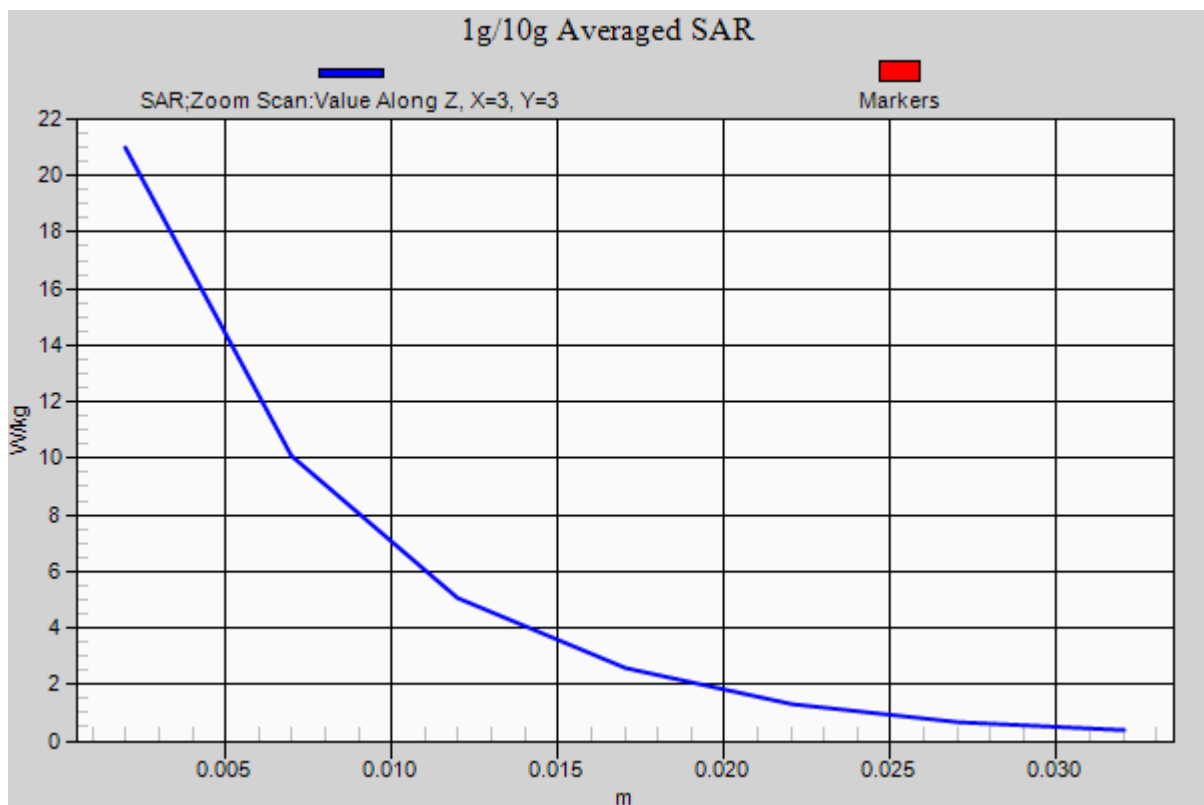

DIGITAL EMC CO., LTD

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:920

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.991$ S/m; $\epsilon_r = 51.427$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(7.36, 7.36, 7.36); Calibrated: 9/24/2013; ; Electronics: DAE4 Sn1396

Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-20; Ambient Temp: 20.7; Tissue Temp: 21.1

2450 MHz System Verification


Area Scan (61x81x1): Interpolated grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.04 dB

Peak SAR (extrapolated) = 30.7 W/kg

SAR(1 g) = 12.8 W/kg; SAR(10 g) = 5.9 W/kg

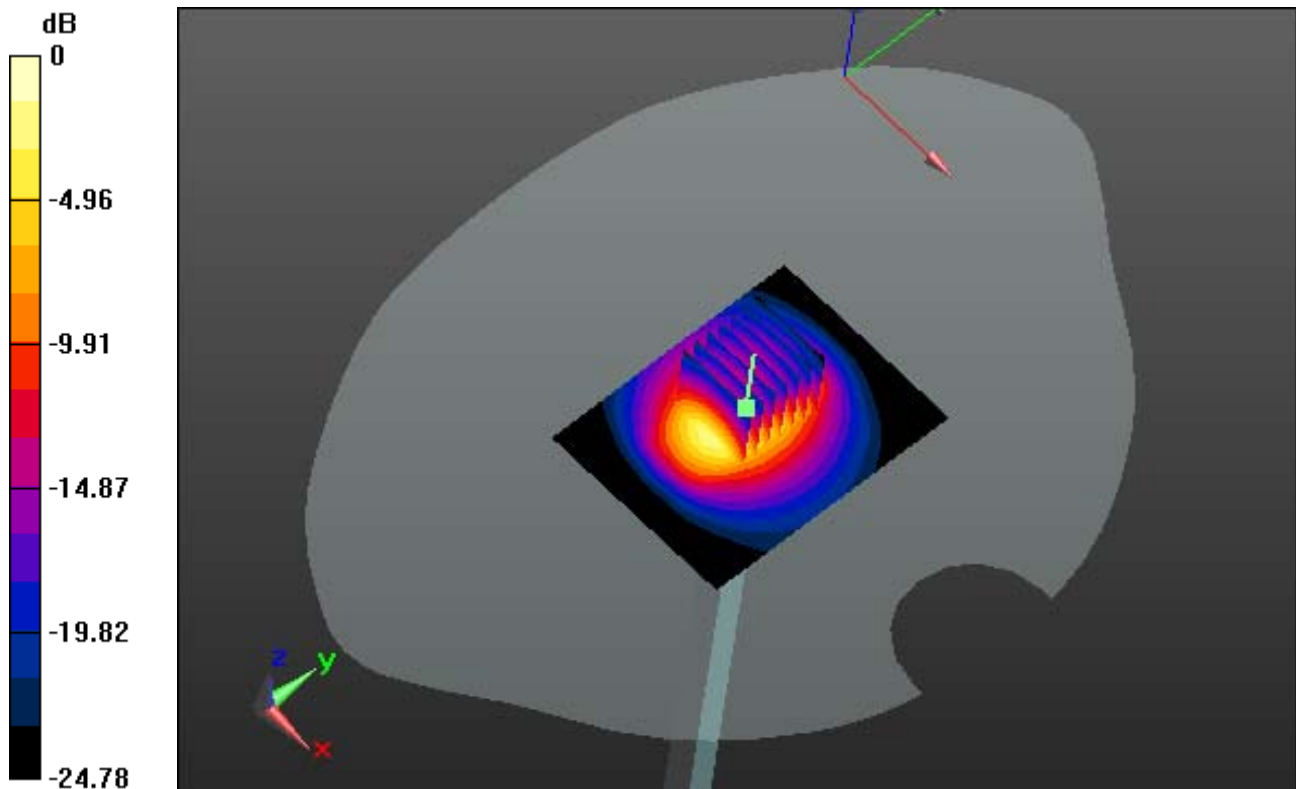

0 dB = 21.6 W/kg

DIGITAL EMC CO., LTD

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:920

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.991$ S/m; $\epsilon_r = 51.427$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(7.36, 7.36, 7.36); Calibrated: 9/24/2013; ; Electronics: DAE4 Sn1396

Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-20; Ambient Temp: 20.7; Tissue Temp: 21.1

2450 MHz System Verification


Area Scan (61x81x1): Interpolated grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.04 dB

Peak SAR (extrapolated) = 30.7 W/kg

SAR(1 g) = 12.8 W/kg; SAR(10 g) = 5.9 W/kg

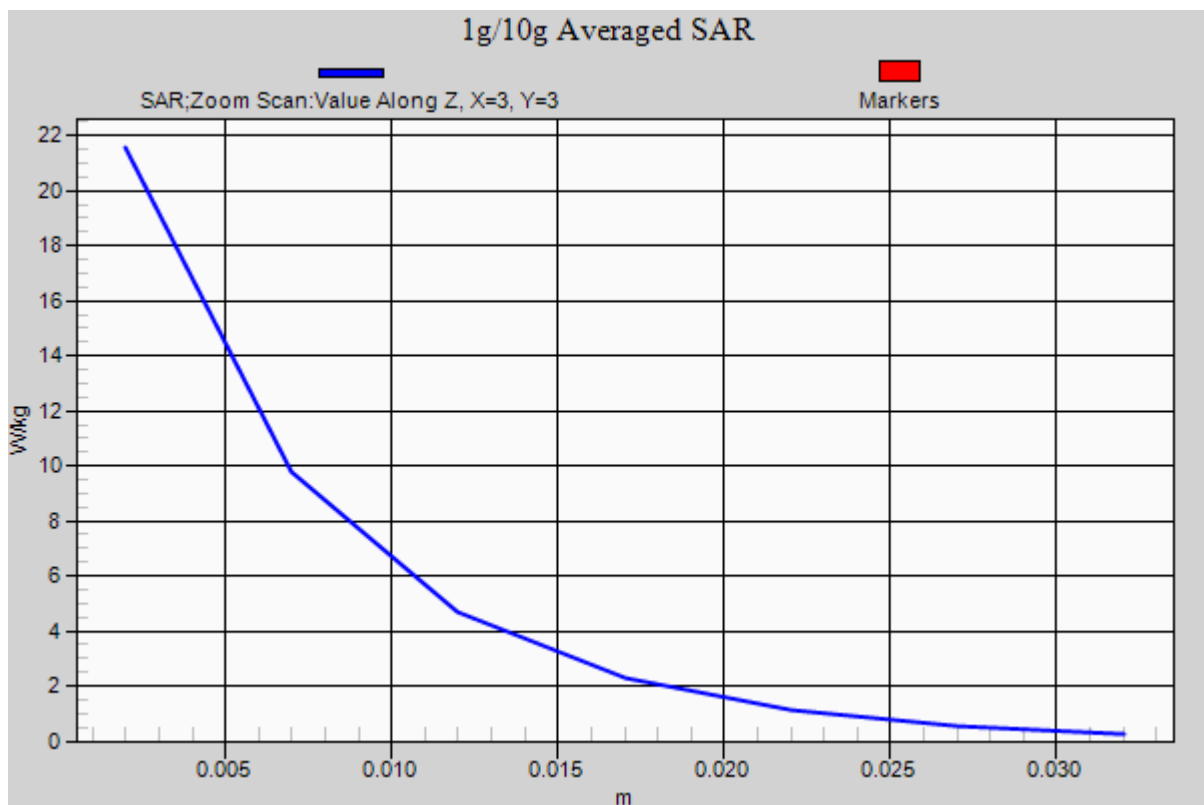

DIGITAL EMC CO., LTD

DUT: LG-D160j; Type: Bar

Communication System: GSM 850_10 (0); Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 40.935$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(10.06, 10.06, 10.06); Calibrated: 9/24/2013; Electronics: DAE4 Sn1396

Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-11; Ambient Temp: 21.1; Tissue Temp: 21.4

Left Touch, GSM850 GPRS 2 Tx Ch. 190, Ant Internal, Standard Battery



Area Scan (71x101x1): Interpolated grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.928 W/kg

SAR(1 g) = 0.686 W/kg; SAR(10 g) = 0.493 W/kg

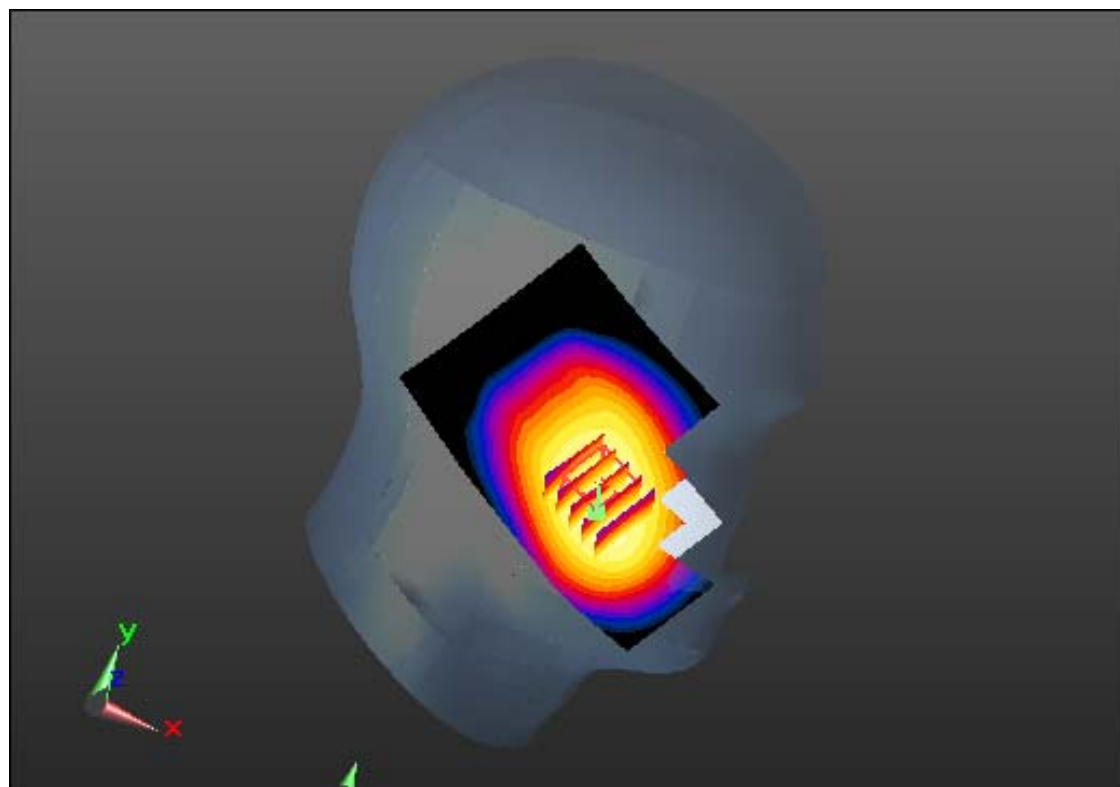

0 dB = 0.816 W/kg

DIGITAL EMC CO., LTD

DUT: LG-D160j; Type: Bar

Communication System: GSM 850_10 (0); Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 40.935$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(10.06, 10.06, 10.06); Calibrated: 9/24/2013; Electronics: DAE4 Sn1396

Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-11; Ambient Temp: 21.1; Tissue Temp: 21.4

Left Touch, GSM850 GPRS 2 Tx Ch. 190, Ant Internal, Standard Battery

With Enlarge plot image



Area Scan (71x101x1): Interpolated grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.928 W/kg

SAR(1 g) = 0.686 W/kg; SAR(10 g) = 0.493 W/kg

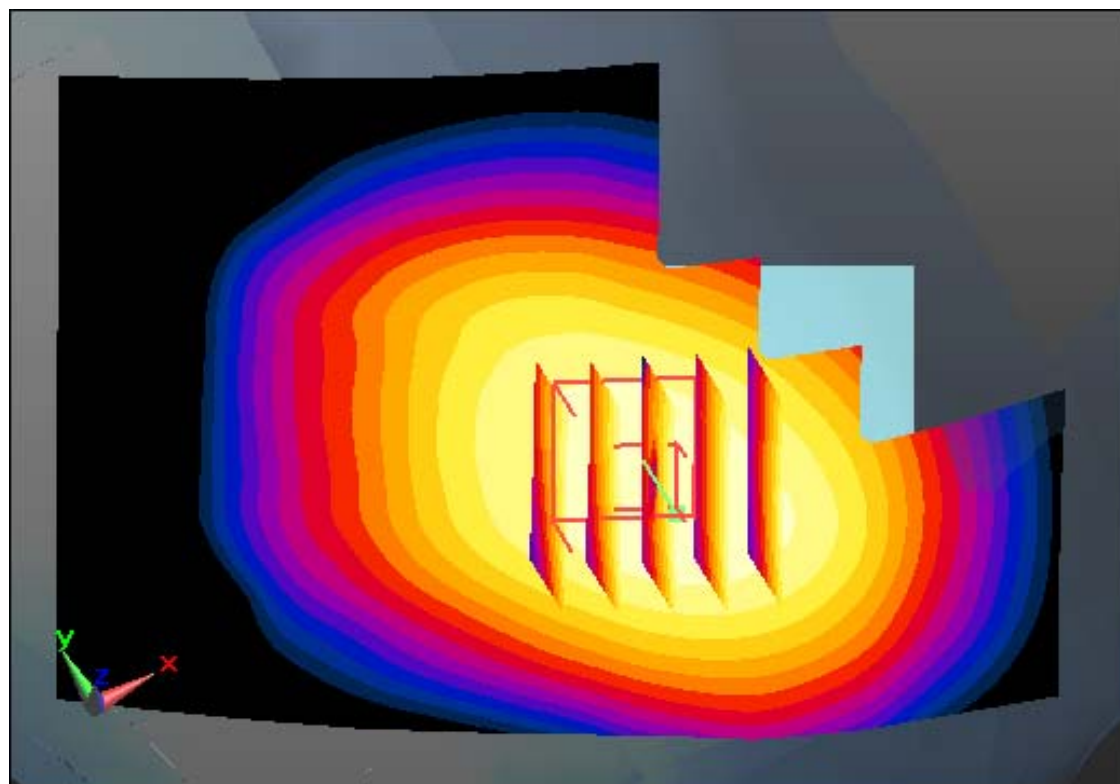

0 dB = 0.816 W/kg

DIGITAL EMC CO., LTD

DUT: LG-D160j; Type: Bar

Communication System: GSM 850_10 (0); Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 40.935$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(10.06, 10.06, 10.06); Calibrated: 9/24/2013; Electronics: DAE4 Sn1396

Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-11; Ambient Temp: 21.1; Tissue Temp: 21.4

Left Touch, GSM850 GPRS 2 Tx Ch. 190, Ant Internal, Standard Battery


Area Scan (71x101x1): Interpolated grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.928 W/kg

SAR(1 g) = 0.686 W/kg; SAR(10 g) = 0.493 W/kg

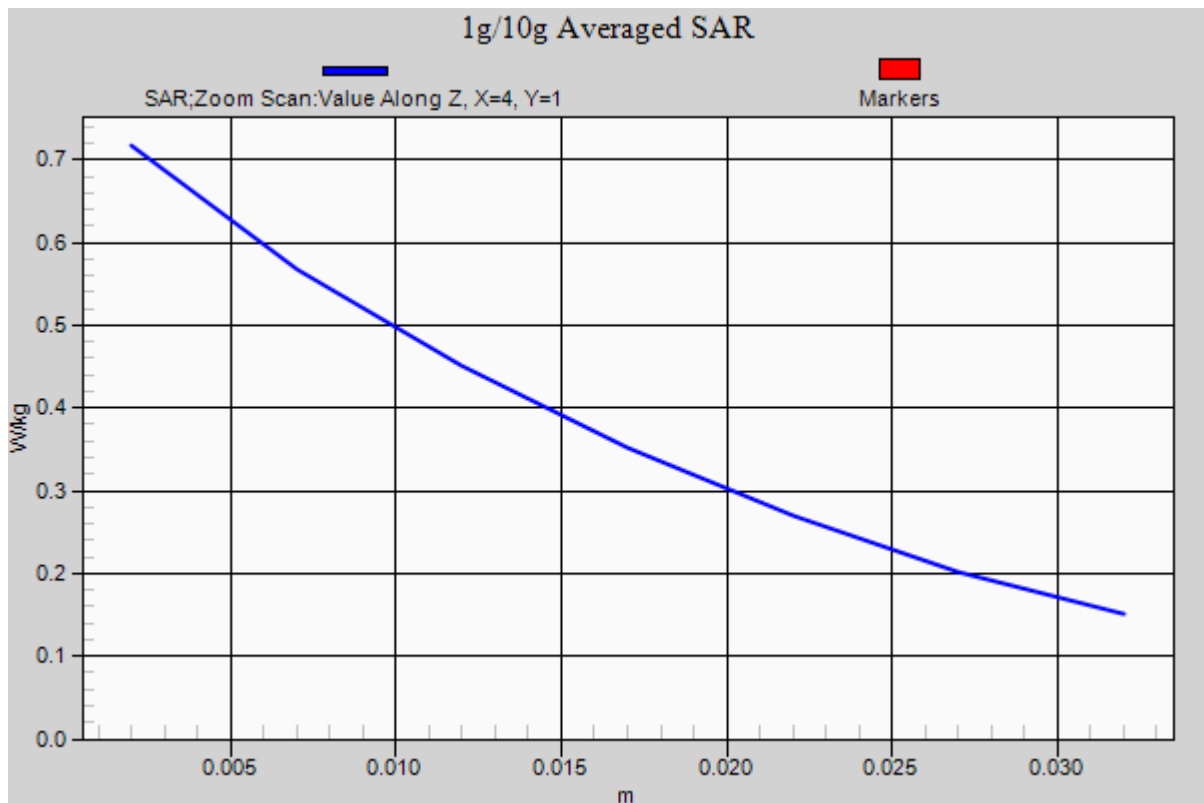

DIGITAL EMC CO., LTD

DUT: LG-D160j; Type: Bar

Communication System: PCS1900_Class 10 (0); Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.397 \text{ S/m}$; $\epsilon_r = 39.936$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(8.25, 8.25, 8.25); Calibrated: 9/24/2013; Electronics: DAE4 Sn1396

Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-13; Ambient Temp: 21.0; Tissue Temp: 21.3

Left Touch, PCS1900 GPRS 2 Tx Ch. 661, Ant Internal, Standard Battery



Area Scan (71x101x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.831 W/kg; SAR(10 g) = 0.449 W/kg

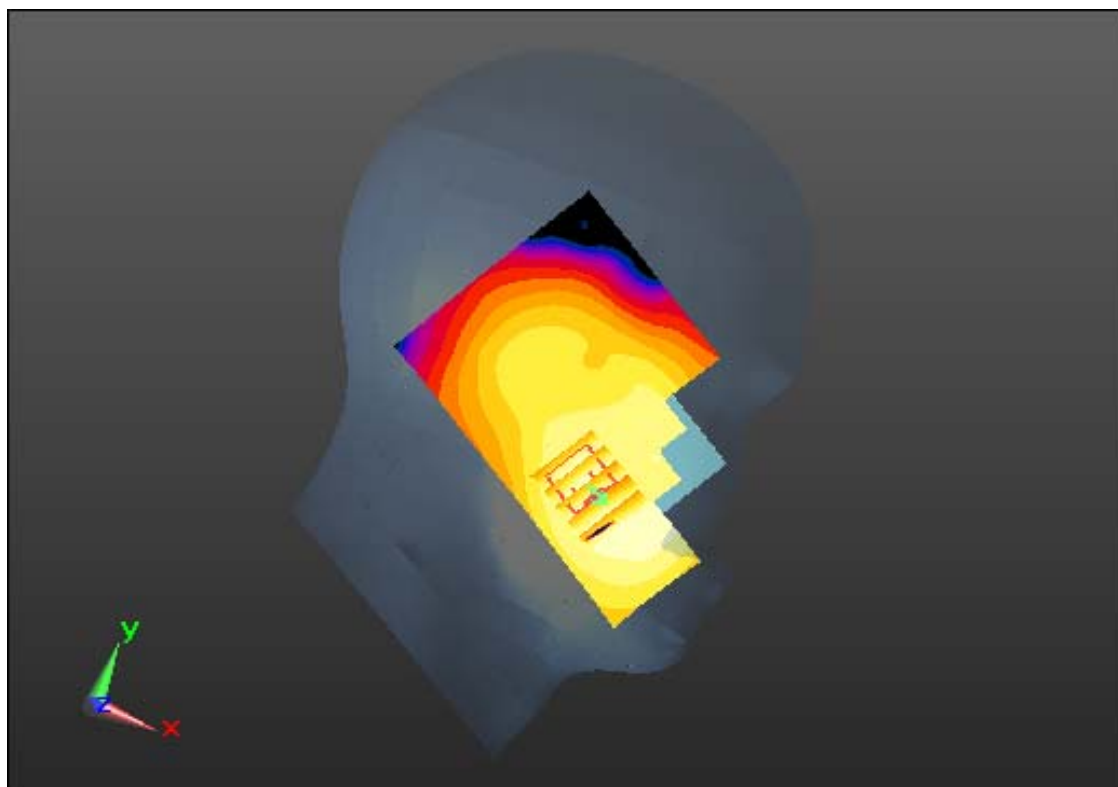

0 dB = 1.10 W/kg

DIGITAL EMC CO., LTD

DUT: LG-D160j; Type: Bar

Communication System: PCS1900_Class 10 (0); Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.397 \text{ S/m}$; $\epsilon_r = 39.936$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(8.25, 8.25, 8.25); Calibrated: 9/24/2013; Electronics: DAE4 Sn1396

Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-13; Ambient Temp: 21.0; Tissue Temp: 21.3

Left Touch, PCS1900 GPRS 2 Tx Ch. 661, Ant Internal, Standard Battery

With Enlarge plot image


Area Scan (71x101x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.831 W/kg; SAR(10 g) = 0.449 W/kg

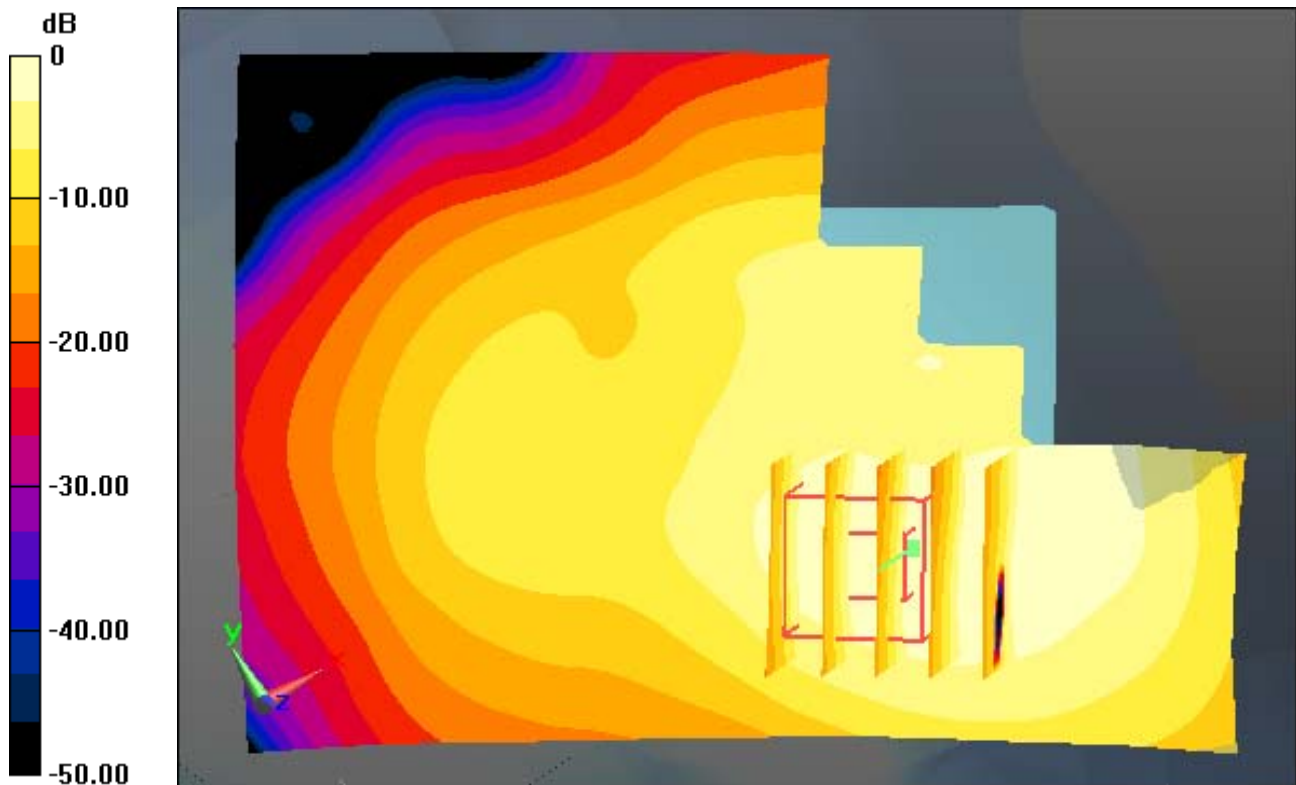

0 dB = 1.10 W/kg

DIGITAL EMC CO., LTD

DUT: LG-D160j; Type: Bar

Communication System: PCS1900_Class 10 (0); Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 39.936$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(8.25, 8.25, 8.25); Calibrated: 9/24/2013; Electronics: DAE4 Sn1396

Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-13; Ambient Temp: 21.0; Tissue Temp: 21.3

Left Touch, PCS1900 GPRS 2 Tx Ch. 661, Ant Internal, Standard Battery


Area Scan (71x101x1): Interpolated grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.831 W/kg; SAR(10 g) = 0.449 W/kg

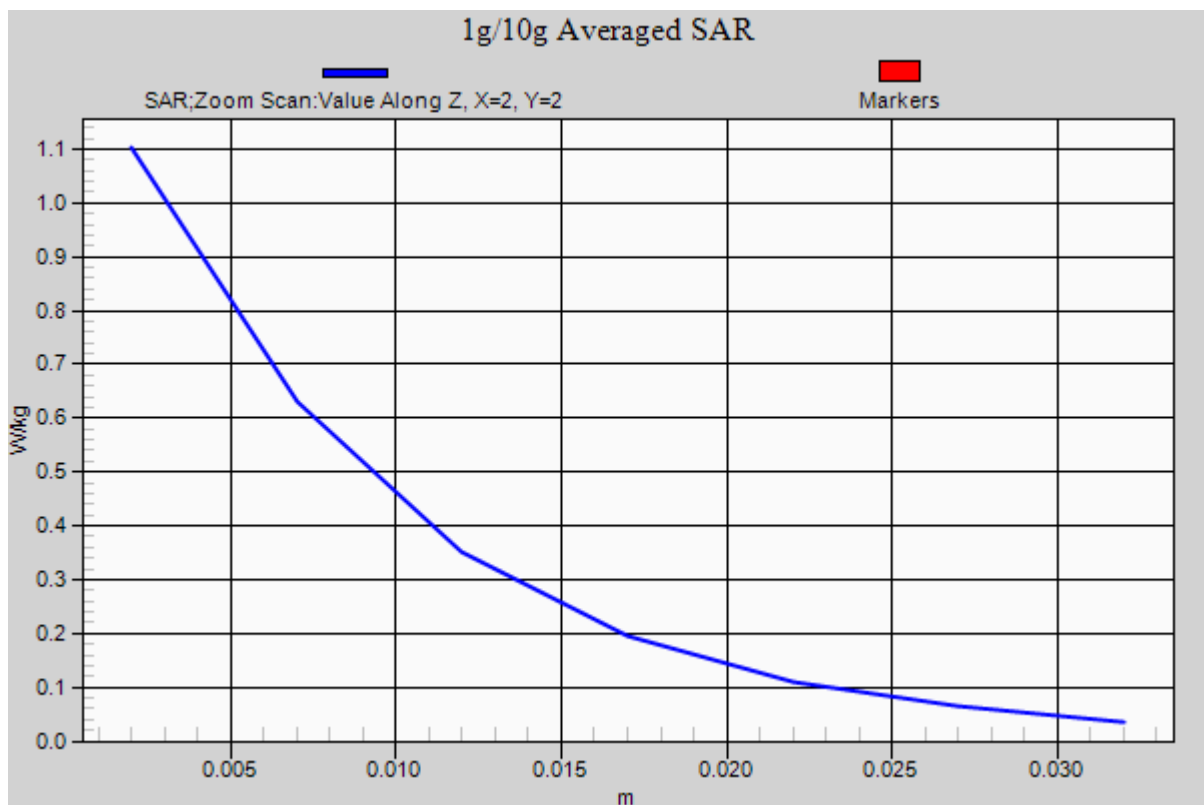

DIGITAL EMC CO., LTD

DUT: LG-D160j; Type: Bar

Communication System: WCDMA 1900 (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.351$ S/m; $\epsilon_r = 40.486$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(8.25, 8.25, 8.25); Calibrated: 9/24/2013; Electronics: DAE4 Sn1396
Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-18; Ambient Temp: 20.9; Tissue Temp: 21.4

Left Touch, WCDMA1900 Ch. 9262, Ant Internal, Standard Battery



Area Scan (71x101x1): Interpolated grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.964 W/kg; SAR(10 g) = 0.523 W/kg

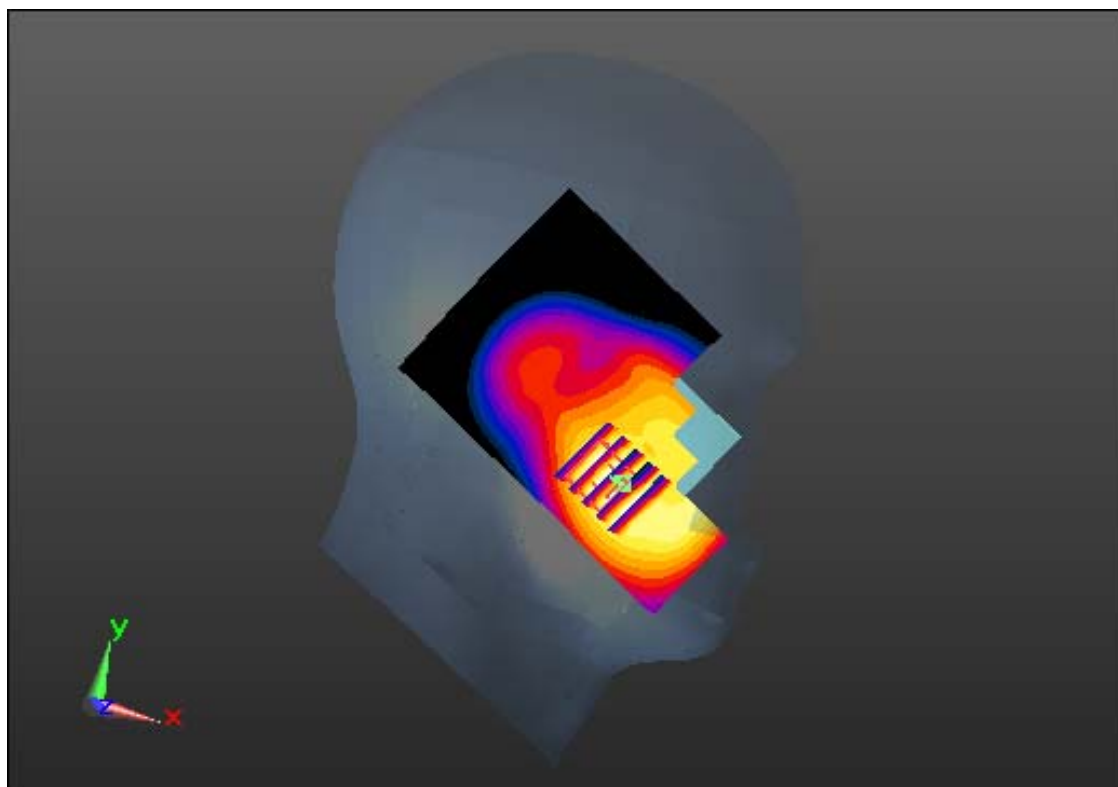

0 dB = 1.24 W/kg

DIGITAL EMC CO., LTD

DUT: LG-D160j; Type: Bar

Communication System: WCDMA 1900 (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.351$ S/m; $\epsilon_r = 40.486$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(8.25, 8.25, 8.25); Calibrated: 9/24/2013; Electronics: DAE4 Sn1396
Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-18; Ambient Temp: 20.9; Tissue Temp: 21.4

Left Touch, WCDMA1900 Ch. 9262, Ant Internal, Standard Battery

With Enlarge plot image


Area Scan (71x101x1): Interpolated grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.964 W/kg; SAR(10 g) = 0.523 W/kg

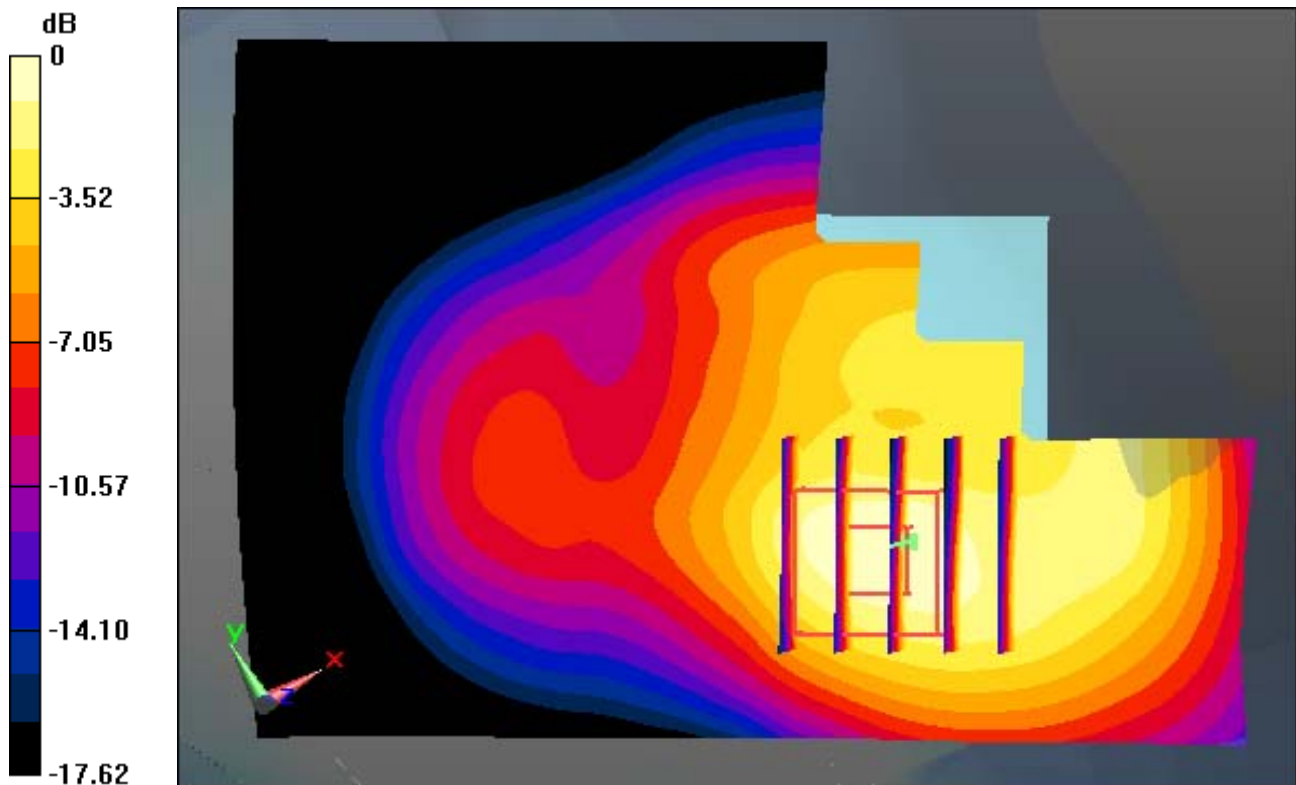

0 dB = 1.24 W/kg

DIGITAL EMC CO., LTD

DUT: LG-D160j; Type: Bar

Communication System: WCDMA 1900 (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.351$ S/m; $\epsilon_r = 40.486$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(8.25, 8.25, 8.25); Calibrated: 9/24/2013; Electronics: DAE4 Sn1396
Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-18; Ambient Temp: 20.9; Tissue Temp: 21.4

Left Touch, WCDMA1900 Ch. 9262, Ant Internal, Standard Battery


Area Scan (71x101x1): Interpolated grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 0.964 W/kg; SAR(10 g) = 0.523 W/kg

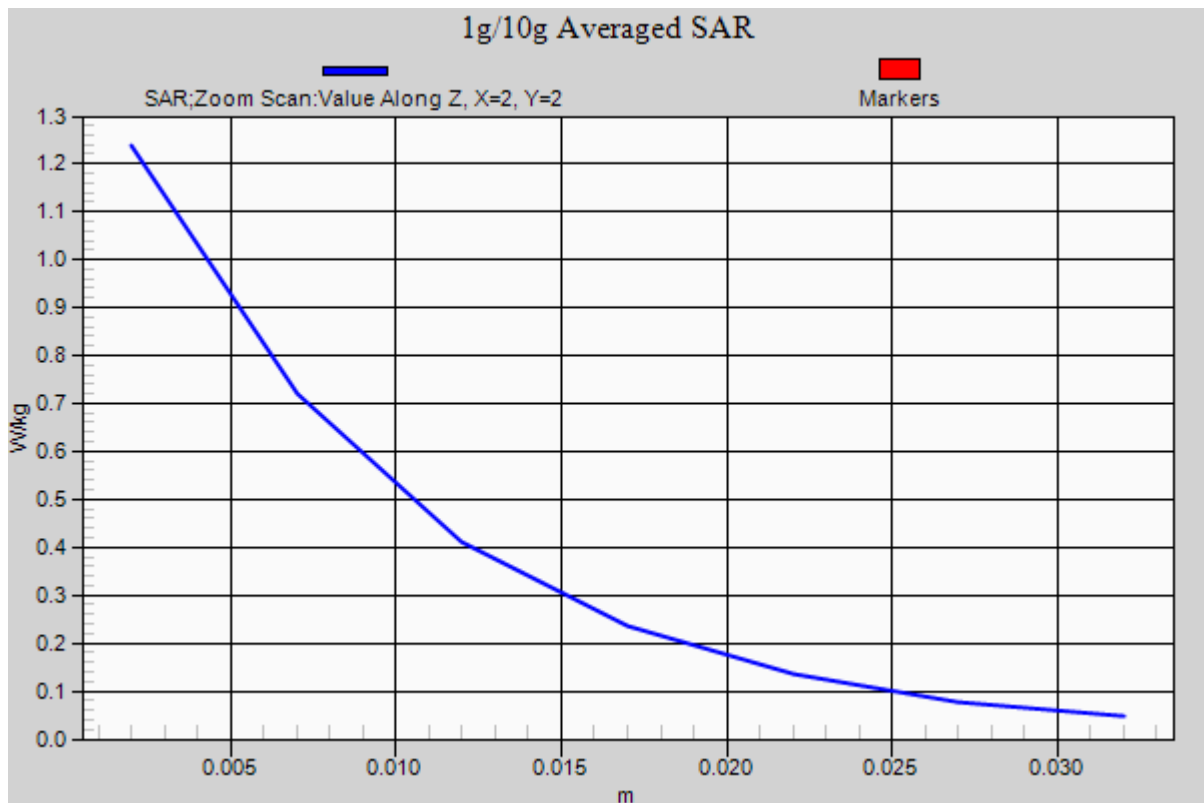

DIGITAL EMC CO., LTD

DUT: LG-D160j; Type: Bar

Communication System: W-LAN (0); Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.742 \text{ S/m}$; $\epsilon_r = 38.064$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(7.44, 7.44, 7.44); Calibrated: 9/24/2013; Electronics: DAE4 Sn1396
Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-20; Ambient Temp: 20.7; Tissue Temp: 21.1

Right Touch, W-LAN(802.11b) Ch. 1, Ant Internal, Standard Battery


Area Scan (131x161x1): Interpolated grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.525 W/kg

SAR(1 g) = 0.213 W/kg; SAR(10 g) = 0.098 W/kg

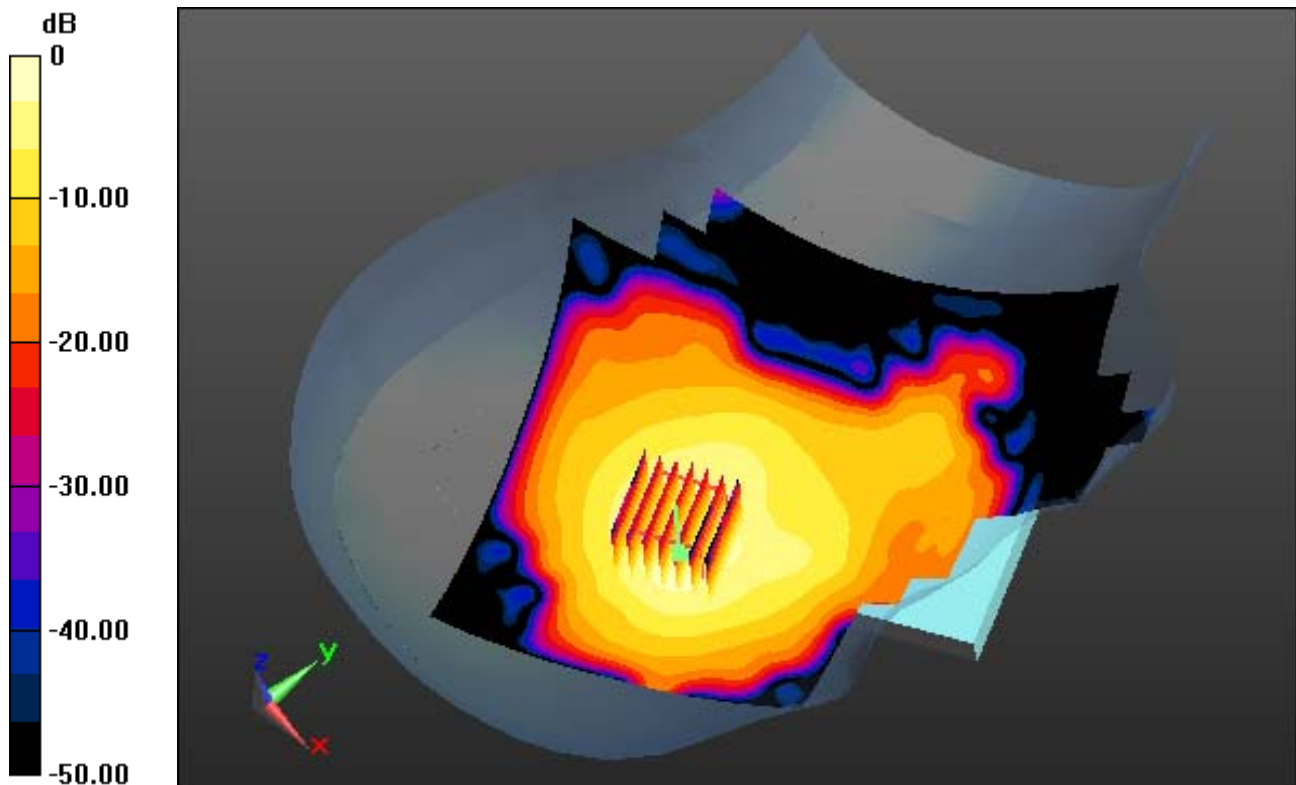

0 dB = 0.346 W/kg

DIGITAL EMC CO., LTD

DUT: LG-D160j; Type: Bar

Communication System: W-LAN (0); Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.742 \text{ S/m}$; $\epsilon_r = 38.064$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(7.44, 7.44, 7.44); Calibrated: 9/24/2013; Electronics: DAE4 Sn1396
Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-20; Ambient Temp: 20.7; Tissue Temp: 21.1

Right Touch, W-LAN(802.11b) Ch. 1, Ant Internal, Standard Battery


With Enlarge plot image

Area Scan (131x161x1): Interpolated grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.525 W/kg

SAR(1 g) = 0.213 W/kg; SAR(10 g) = 0.098 W/kg

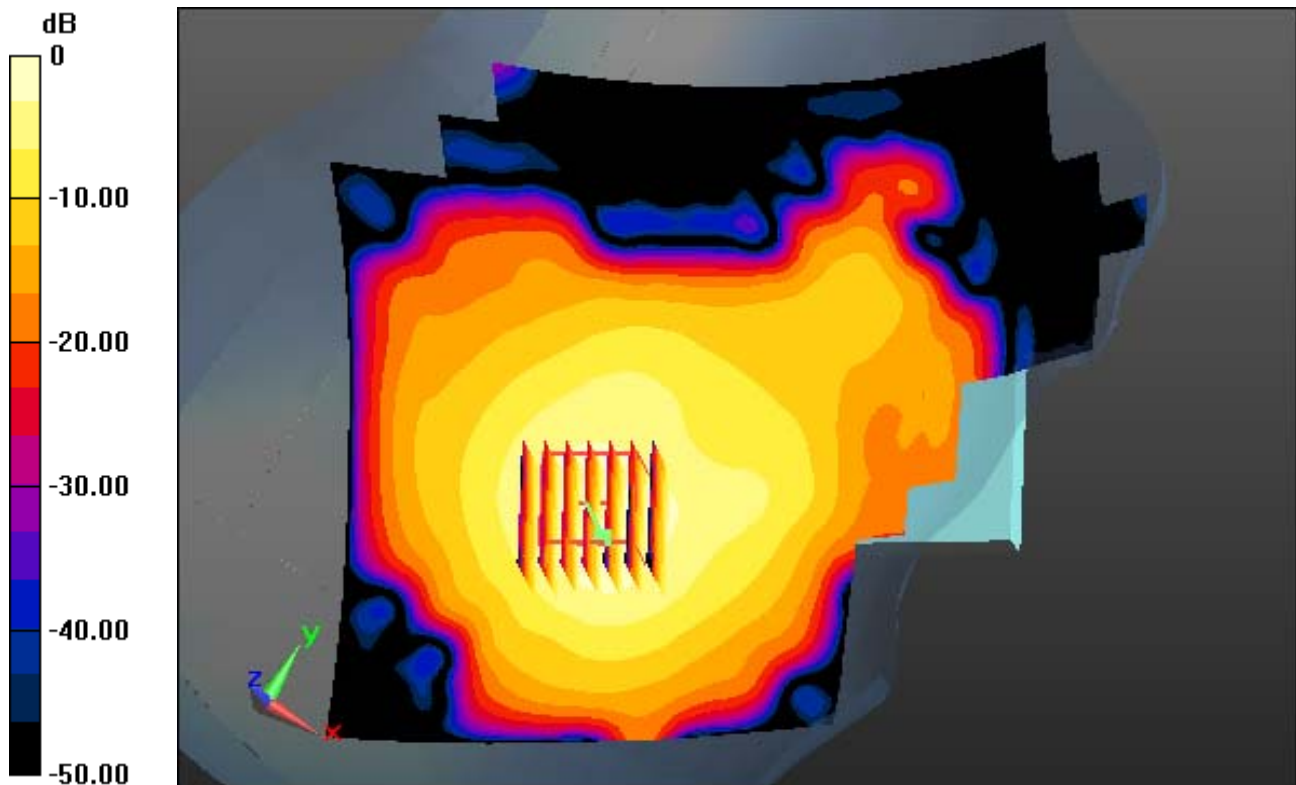

0 dB = 0.346 W/kg

DIGITAL EMC CO., LTD

DUT: LG-D160j; Type: Bar

Communication System: W-LAN (0); Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412$ MHz; $\sigma = 1.742$ S/m; $\epsilon_r = 38.064$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(7.44, 7.44, 7.44); Calibrated: 9/24/2013; Electronics: DAE4 Sn1396
Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-20; Ambient Temp: 20.7; Tissue Temp: 21.1

Right Touch, W-LAN(802.11b) Ch. 1, Ant Internal, Standard Battery


Area Scan (131x161x1): Interpolated grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.525 W/kg

SAR(1 g) = 0.213 W/kg; SAR(10 g) = 0.098 W/kg

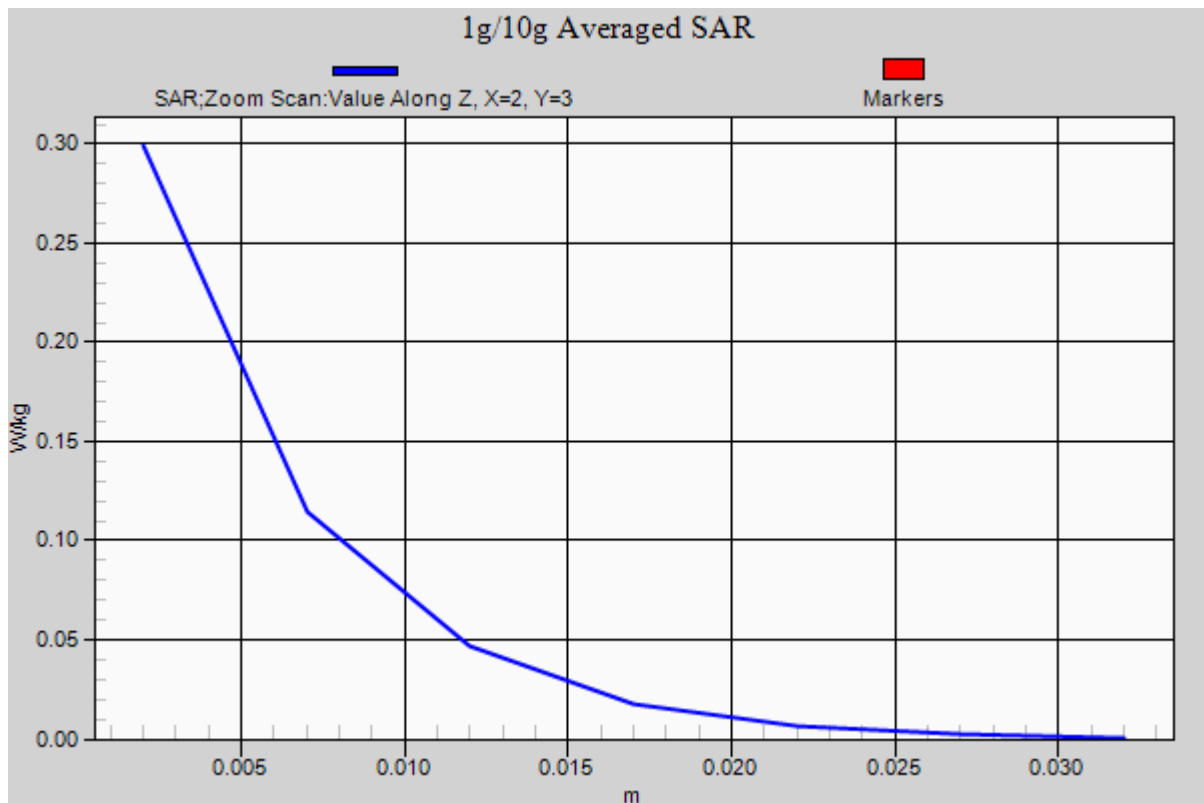

DIGITAL EMC CO., LTD

DUT: LG-D160j; Type: Bar

Communication System: GSM 850 (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.972$ S/m; $\epsilon_r = 55.03$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(9.79, 9.79, 9.79); Calibrated: 9/24/2013; Electronics: DAE4 Sn1396
Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-12; Ambient Temp: 21.3; Tissue Temp: 21.6

1 cm space from Body, Rear, GSM850 Ch. 190, Ant Internal


Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.953 W/kg

SAR(1 g) = 0.717 W/kg; SAR(10 g) = 0.520 W/kg

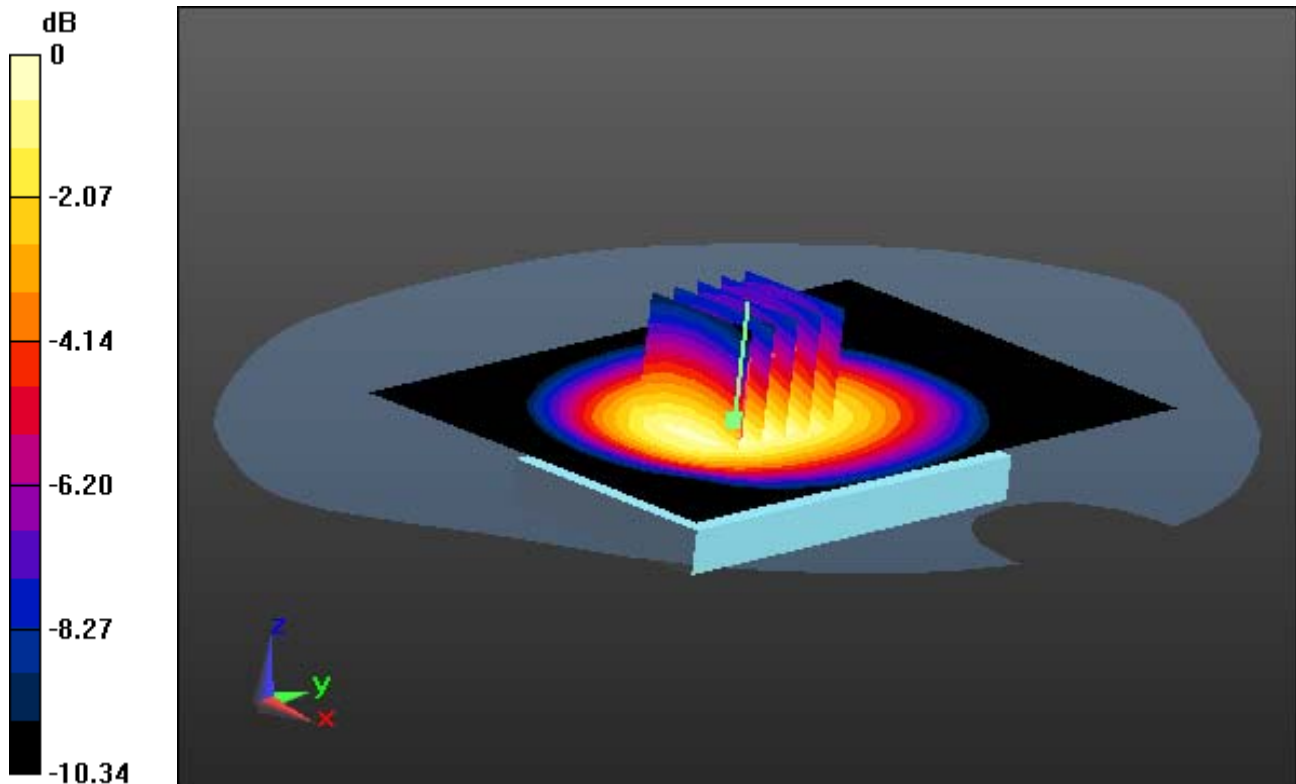

0 dB = 0.848 W/kg

DIGITAL EMC CO., LTD

DUT: LG-D160j; Type: Bar

Communication System: GSM 850 (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.972 \text{ S/m}$; $\epsilon_r = 55.03$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(9.79, 9.79, 9.79); Calibrated: 9/24/2013; Electronics: DAE4 Sn1396
Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-12; Ambient Temp: 21.3; Tissue Temp: 21.6

1 cm space from Body, Rear, GSM850 Ch. 190, Ant Internal

With Enlarge plot image


Area Scan (71x111x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.953 W/kg

SAR(1 g) = 0.717 W/kg; SAR(10 g) = 0.520 W/kg

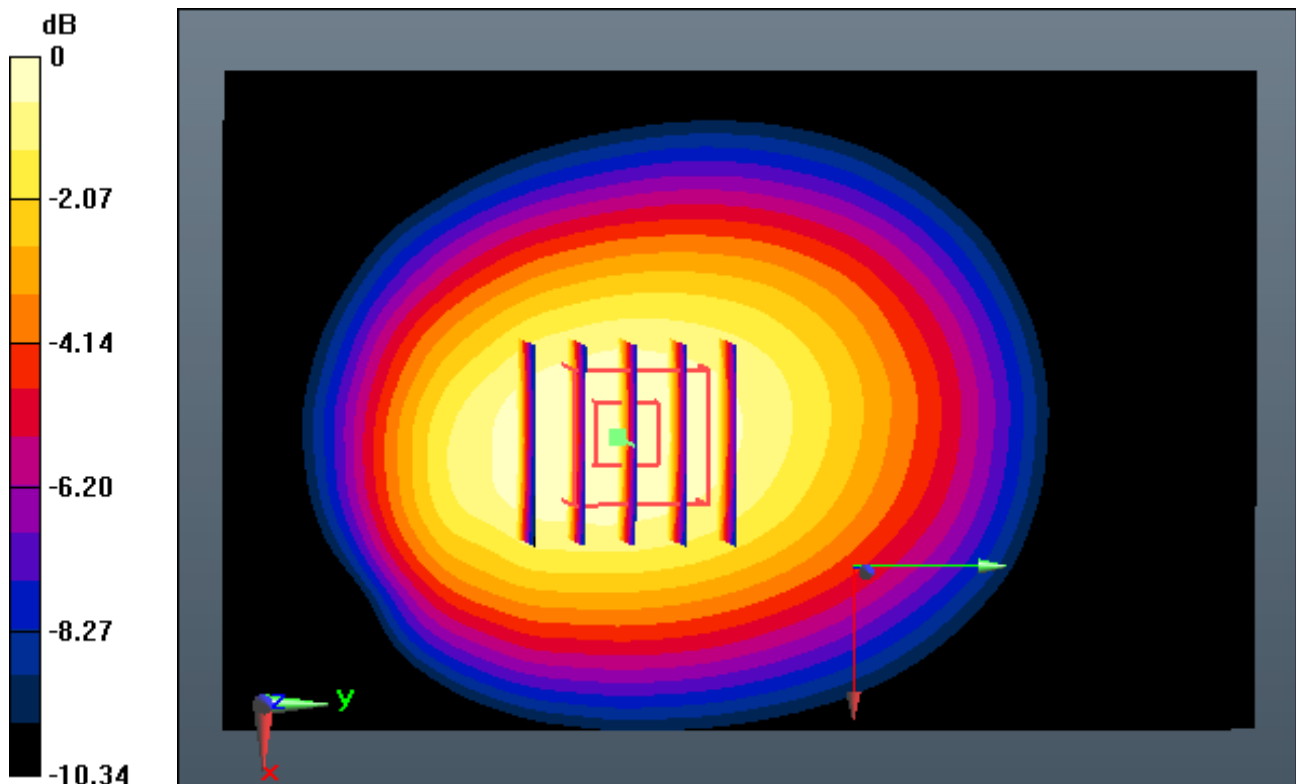

0 dB = 0.848 W/kg

DIGITAL EMC CO., LTD

DUT: LG-D160j; Type: Bar

Communication System: GSM 850 (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.972$ S/m; $\epsilon_r = 55.03$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(9.79, 9.79, 9.79); Calibrated: 9/24/2013; Electronics: DAE4 Sn1396
Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-12; Ambient Temp: 21.3; Tissue Temp: 21.6

1 cm space from Body, Rear, GSM850 Ch. 190, Ant Internal


Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.953 W/kg

SAR(1 g) = 0.717 W/kg; SAR(10 g) = 0.520 W/kg

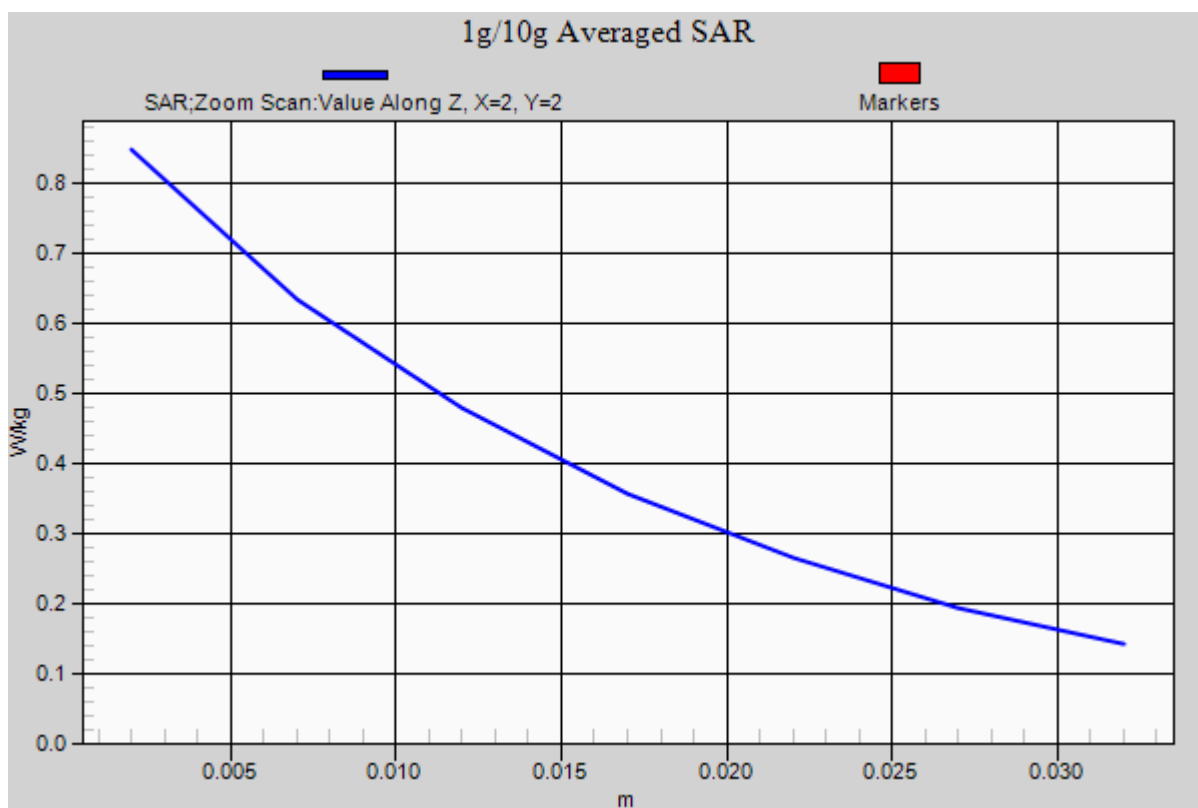

DIGITAL EMC CO., LTD

DUT: LG-D160j; Type: Bar

Communication System: GSM 850_10 (0); Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.972$ S/m; $\epsilon_r = 55.03$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(9.79, 9.79, 9.79); Calibrated: 9/24/2013; Electronics: DAE4 Sn1396

Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-12; Ambient Temp: 21.3; Tissue Temp: 21.6

1 cm space from Body, Rear, GSM850 GPRS 2 Tx Ch. 190, Ant Internal


Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.733 W/kg

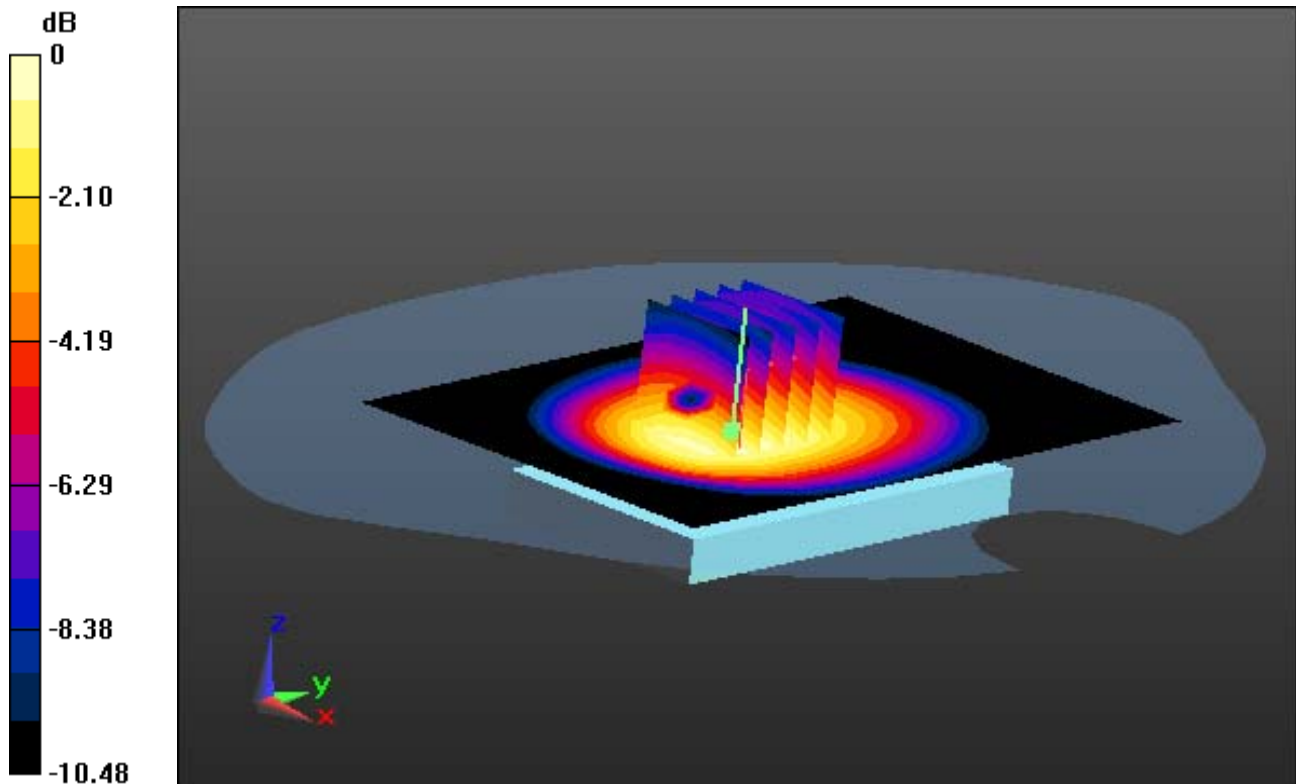

0 dB = 1.20 W/kg

DIGITAL EMC CO., LTD

DUT: LG-D160j; Type: Bar

Communication System: GSM 850_10 (0); Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.972$ S/m; $\epsilon_r = 55.03$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(9.79, 9.79, 9.79); Calibrated: 9/24/2013; Electronics: DAE4 Sn1396

Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-12; Ambient Temp: 21.3; Tissue Temp: 21.6

1 cm space from Body, Rear, GSM850 GPRS 2 Tx Ch. 190, Ant Internal

With Enlarge plot image


Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.733 W/kg

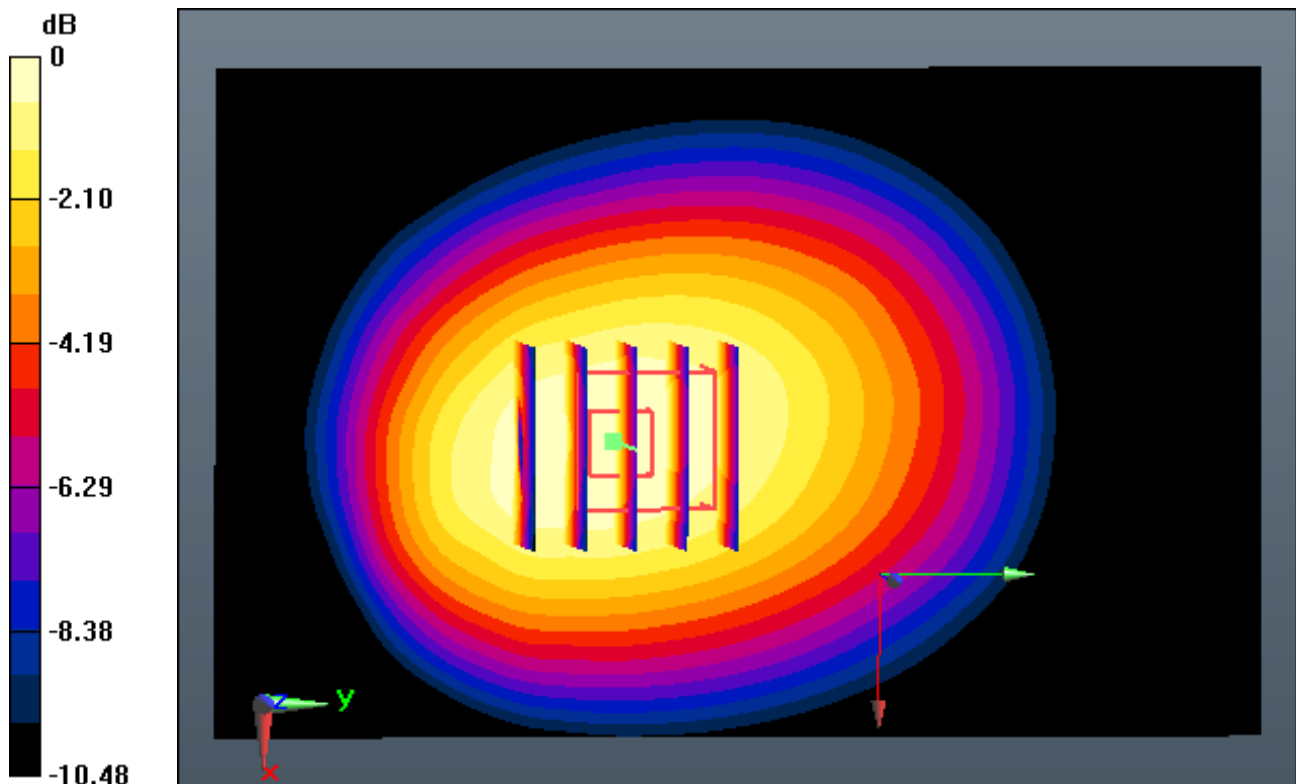

0 dB = 1.20 W/kg

DIGITAL EMC CO., LTD

DUT: LG-D160j; Type: Bar

Communication System: GSM 850_10 (0); Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.972$ S/m; $\epsilon_r = 55.03$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(9.79, 9.79, 9.79); Calibrated: 9/24/2013; Electronics: DAE4 Sn1396

Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-12; Ambient Temp: 21.3; Tissue Temp: 21.6

1 cm space from Body, Rear, GSM850 GPRS 2 Tx Ch. 190, Ant Internal


Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.733 W/kg

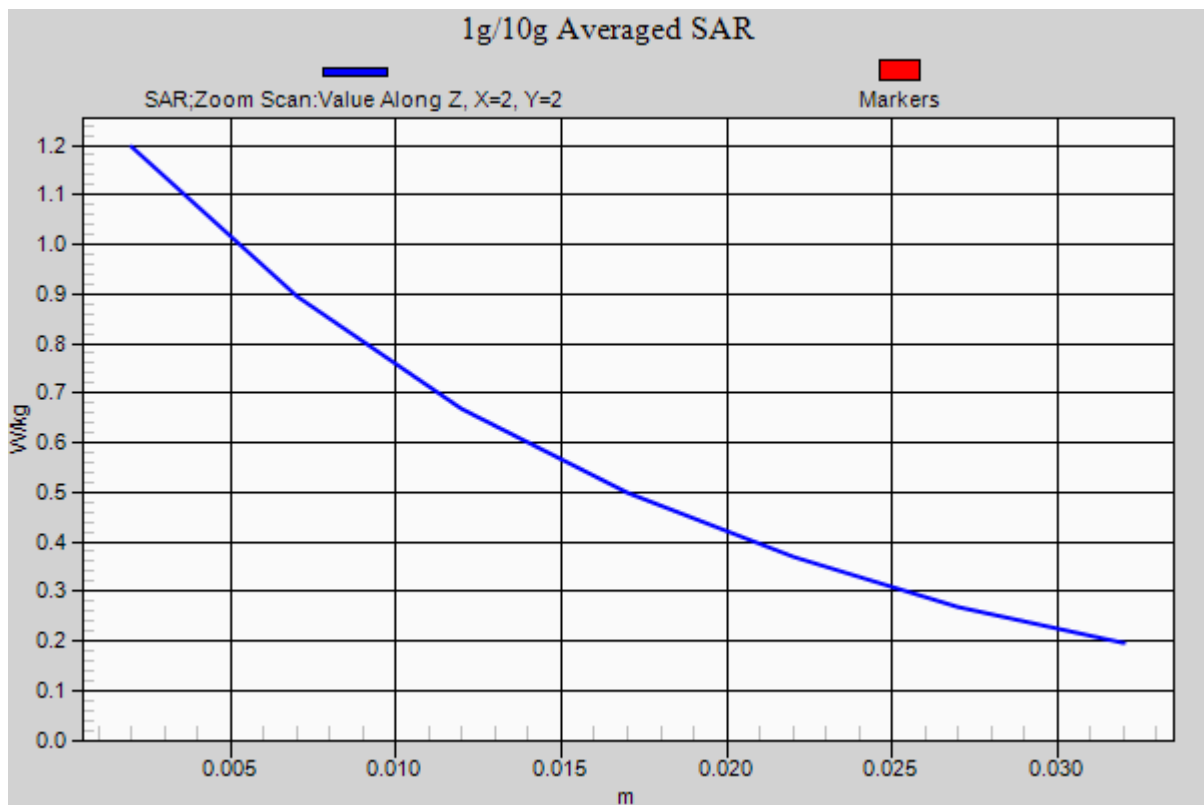

DIGITAL EMC CO., LTD

DUT: LG-D160j; Type: Bar

Communication System: PCS 1900 (0); Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.53$ S/m; $\epsilon_r = 52.268$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(7.79, 7.79, 7.79); Calibrated: 9/24/2013; Electronics: DAE4 Sn1396
Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-14; Ambient Temp: 21.2; Tissue Temp: 21.5

1 cm space from Body, Rear, PCS1900 Ch. 810, Ant Internal



Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 0.899 W/kg; SAR(10 g) = 0.447 W/kg

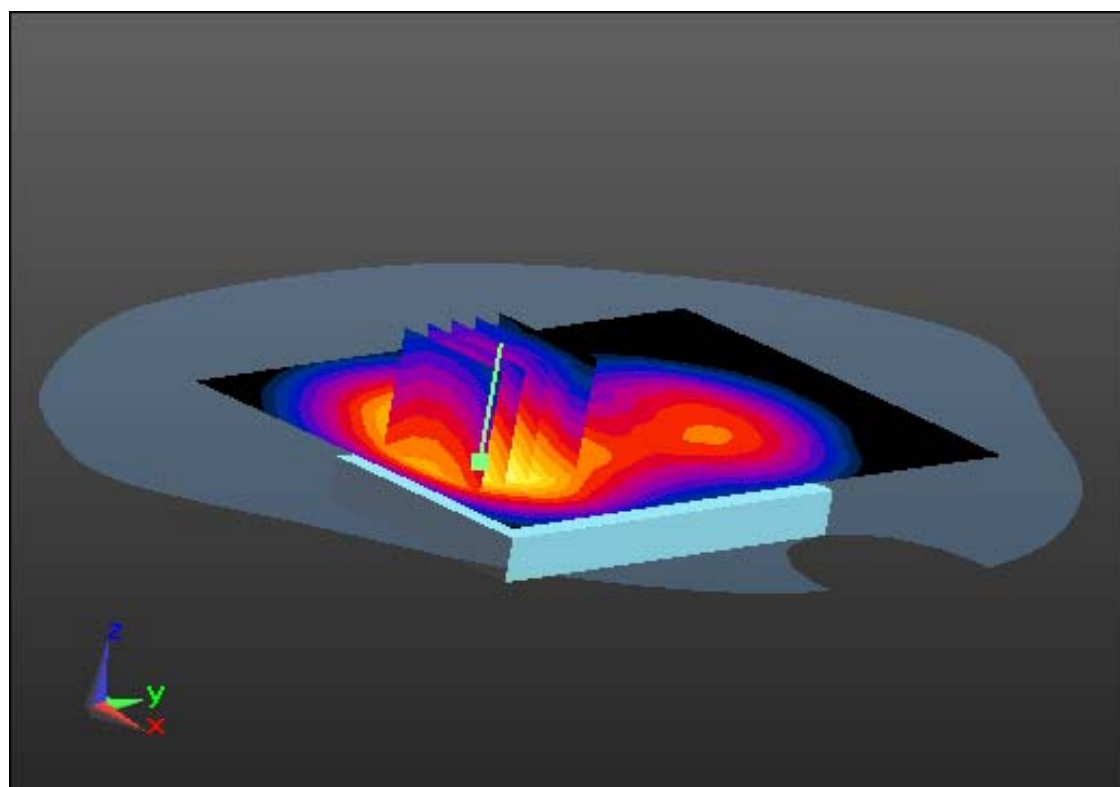

0 dB = 1.25 W/kg

DIGITAL EMC CO., LTD

DUT: LG-D160j; Type: Bar

Communication System: PCS 1900 (0); Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.53$ S/m; $\epsilon_r = 52.268$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(7.79, 7.79, 7.79); Calibrated: 9/24/2013; Electronics: DAE4 Sn1396
Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-14; Ambient Temp: 21.2; Tissue Temp: 21.5

1 cm space from Body, Rear, PCS1900 Ch. 810, Ant Internal

With Enlarge plot image


Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 0.899 W/kg; SAR(10 g) = 0.447 W/kg

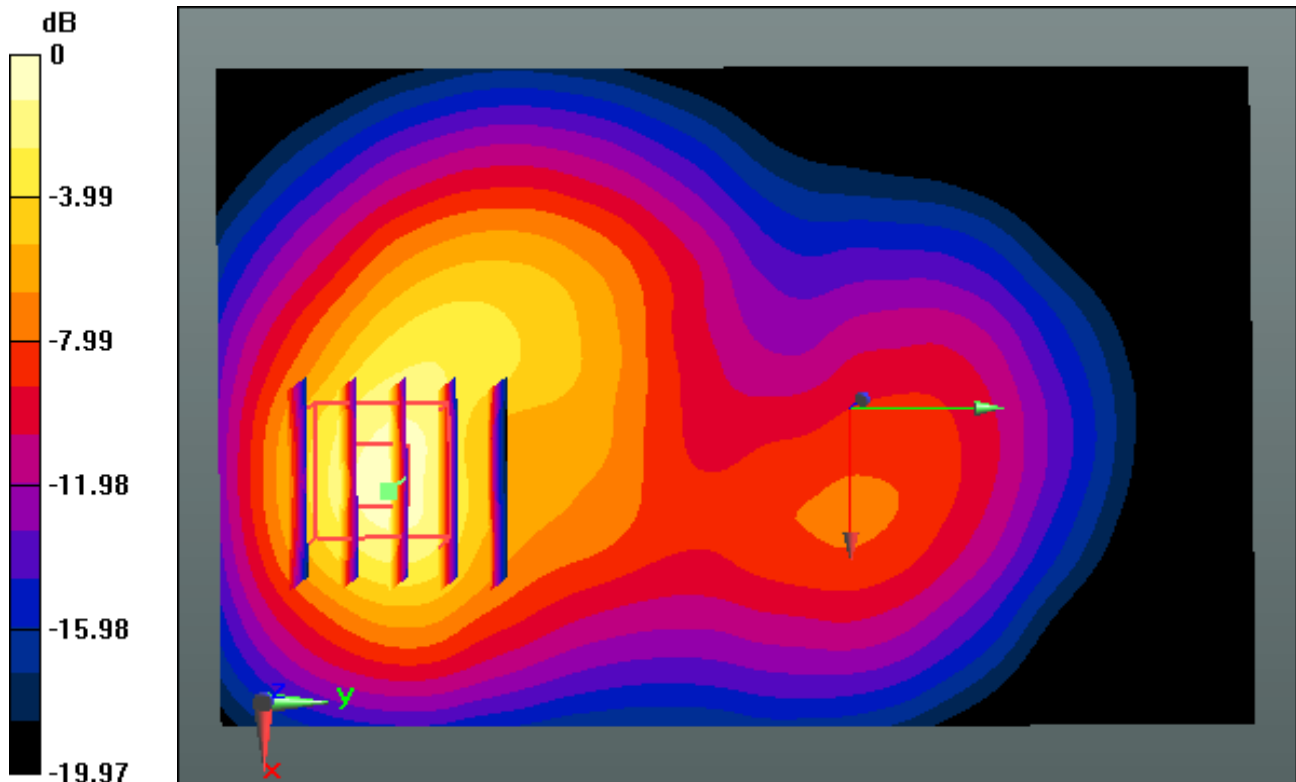

0 dB = 1.25 W/kg

DIGITAL EMC CO., LTD

DUT: LG-D160j; Type: Bar

Communication System: PCS 1900 (0); Frequency: 1909.8 MHz; Duty Cycle: 1:8.3
Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.53$ S/m; $\epsilon_r = 52.268$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(7.79, 7.79, 7.79); Calibrated: 9/24/2013; Electronics: DAE4 Sn1396
Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-14; Ambient Temp: 21.2; Tissue Temp: 21.5

1 cm space from Body, Rear, PCS1900 Ch. 810, Ant Internal


Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 0.899 W/kg; SAR(10 g) = 0.447 W/kg

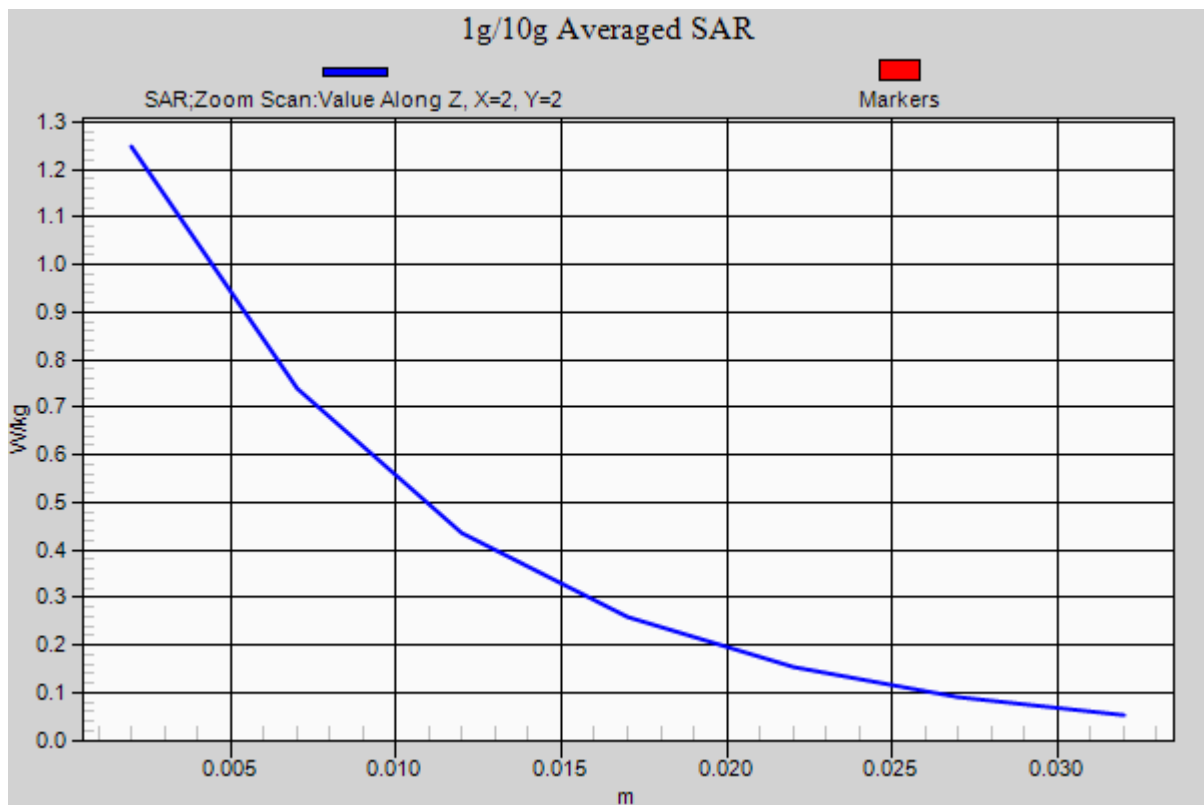

DIGITAL EMC CO., LTD

DUT: LG-D160j; Type: Bar

Communication System: PCS1900_Class 10 (0); Frequency: 1909.8 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.53$ S/m; $\epsilon_r = 52.268$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(7.79, 7.79, 7.79); Calibrated: 9/24/2013; Electronics: DAE4 Sn1396

Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-14; Ambient Temp: 21.2; Tissue Temp: 21.5

1 cm space from Body, Rear, PCS1900 GPRS 2 Tx Ch. 810, Ant Internal


Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.80 W/kg

SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.514 W/kg

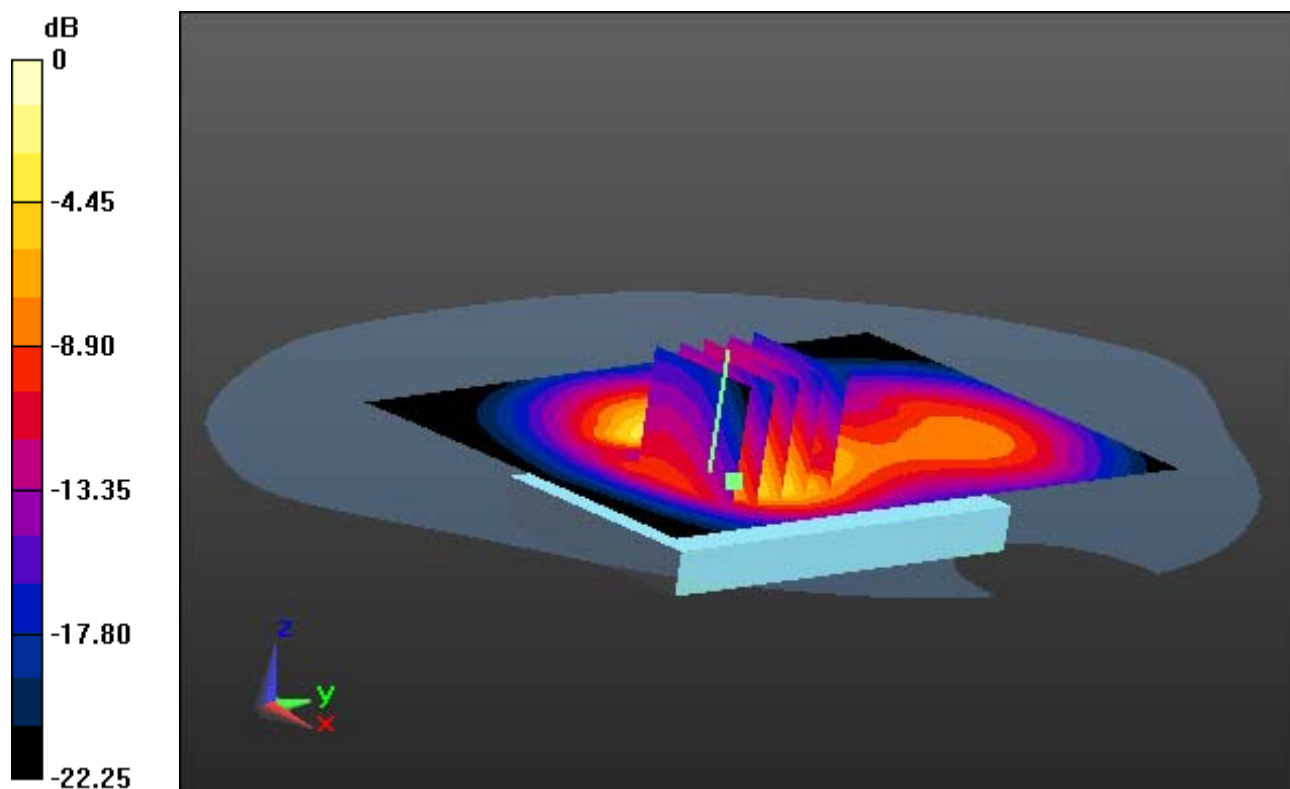

0 dB = 1.38 W/kg

DIGITAL EMC CO., LTD

DUT: LG-D160j; Type: Bar

Communication System: PCS1900_Class 10 (0); Frequency: 1909.8 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.53$ S/m; $\epsilon_r = 52.268$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(7.79, 7.79, 7.79); Calibrated: 9/24/2013; Electronics: DAE4 Sn1396

Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-14; Ambient Temp: 21.2; Tissue Temp: 21.5

1 cm space from Body, Rear, PCS1900 GPRS 2 Tx Ch. 810, Ant Internal

With Enlarge plot image


Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.80 W/kg

SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.514 W/kg

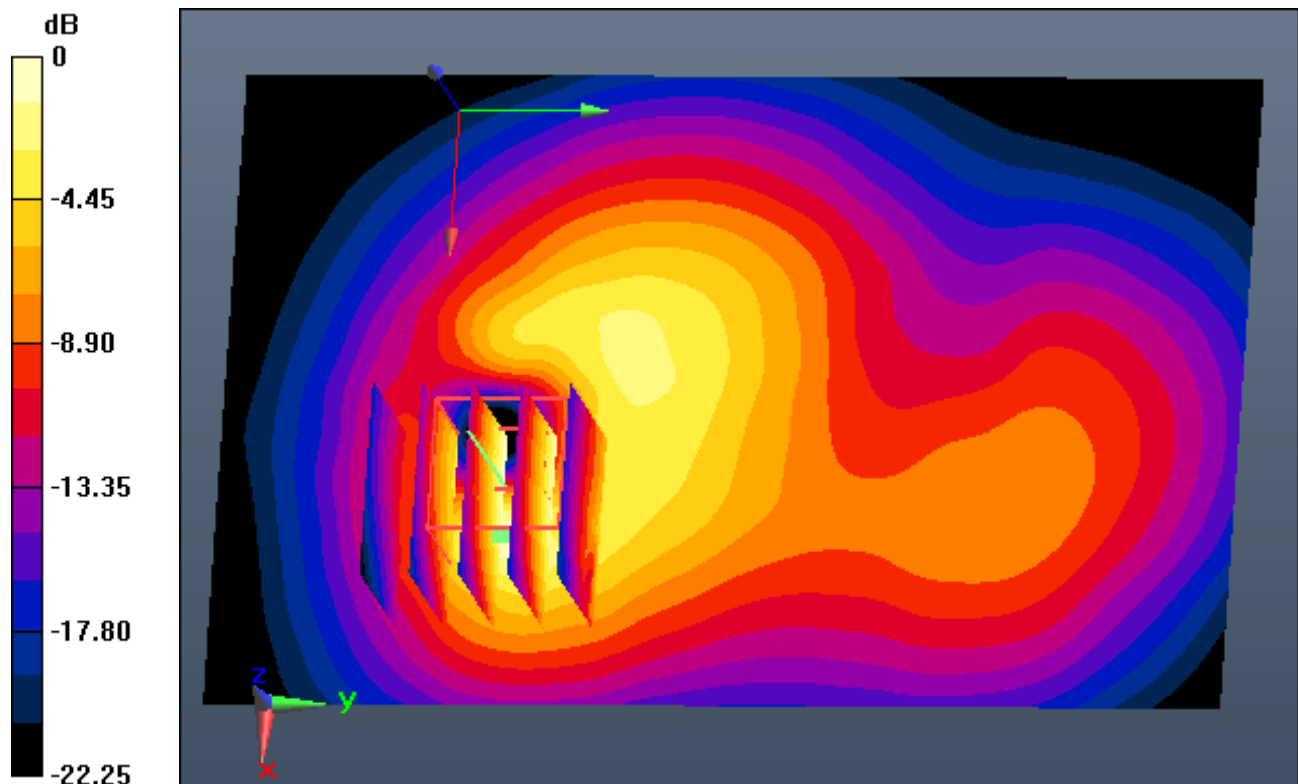

0 dB = 1.38 W/kg

DIGITAL EMC CO., LTD

DUT: LG-D160j; Type: Bar

Communication System: PCS1900_Class 10 (0); Frequency: 1909.8 MHz; Duty Cycle: 1:4.15

Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.53$ S/m; $\epsilon_r = 52.268$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(7.79, 7.79, 7.79); Calibrated: 9/24/2013; Electronics: DAE4 Sn1396

Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786

Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-14; Ambient Temp: 21.2; Tissue Temp: 21.5

1 cm space from Body, Rear, PCS1900 GPRS 2 Tx Ch. 810, Ant Internal


Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.80 W/kg

SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.514 W/kg

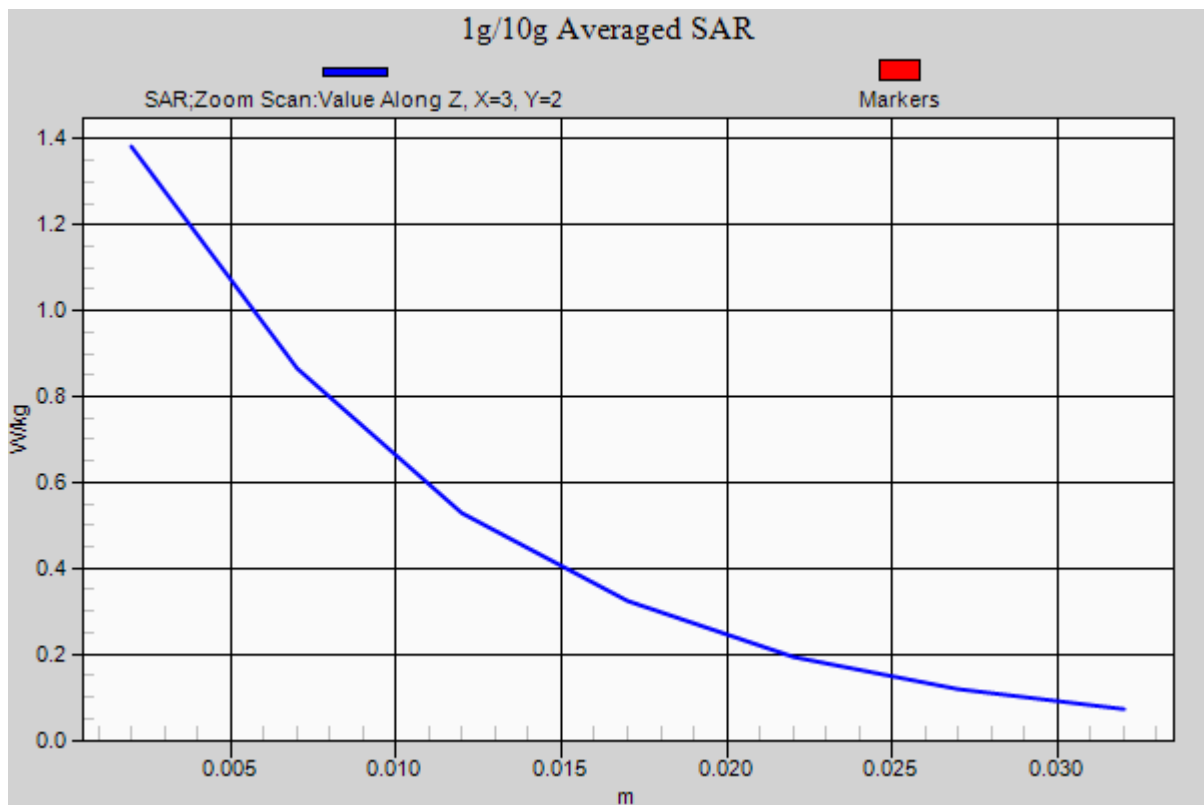

DIGITAL EMC CO., LTD

DUT: LG-D160j; Type: Bar

Communication System: WCDMA 1900 (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.468$ S/m; $\epsilon_r = 52.356$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(7.79, 7.79, 7.79); Calibrated: 9/24/2013; Electronics: DAE4 Sn1396
Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-18; Ambient Temp: 20.9; Tissue Temp: 21.4

1 cm space from Body, Rear, WCDMA1900 Ch. 9262, Ant Internal


Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.99 W/kg

SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.575 W/kg

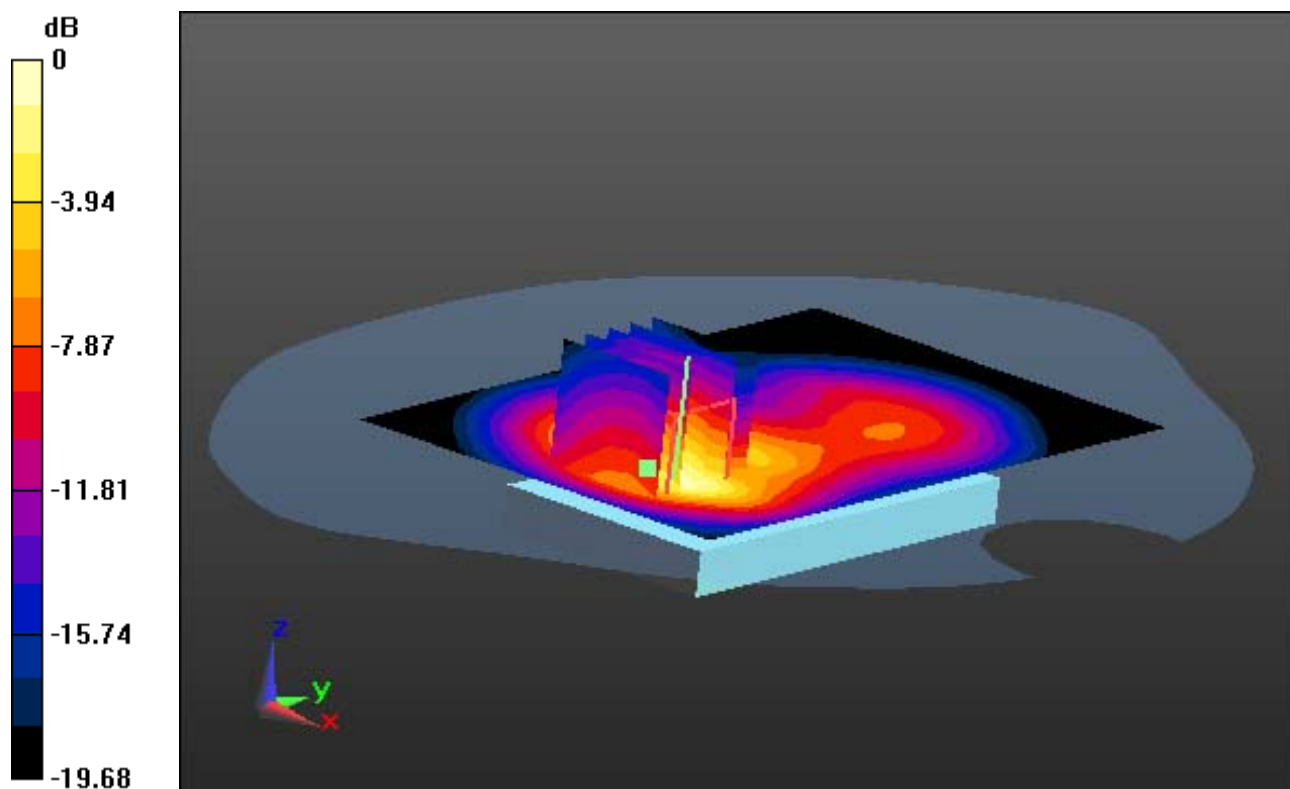

0 dB = 1.62 W/kg

DIGITAL EMC CO., LTD

DUT: LG-D160j; Type: Bar

Communication System: WCDMA 1900 (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.468$ S/m; $\epsilon_r = 52.356$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(7.79, 7.79, 7.79); Calibrated: 9/24/2013; Electronics: DAE4 Sn1396
Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-18; Ambient Temp: 20.9; Tissue Temp: 21.4

1 cm space from Body, Rear, WCDMA1900 Ch. 9262, Ant Internal

With Enlarge plot image


Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.99 W/kg

SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.575 W/kg

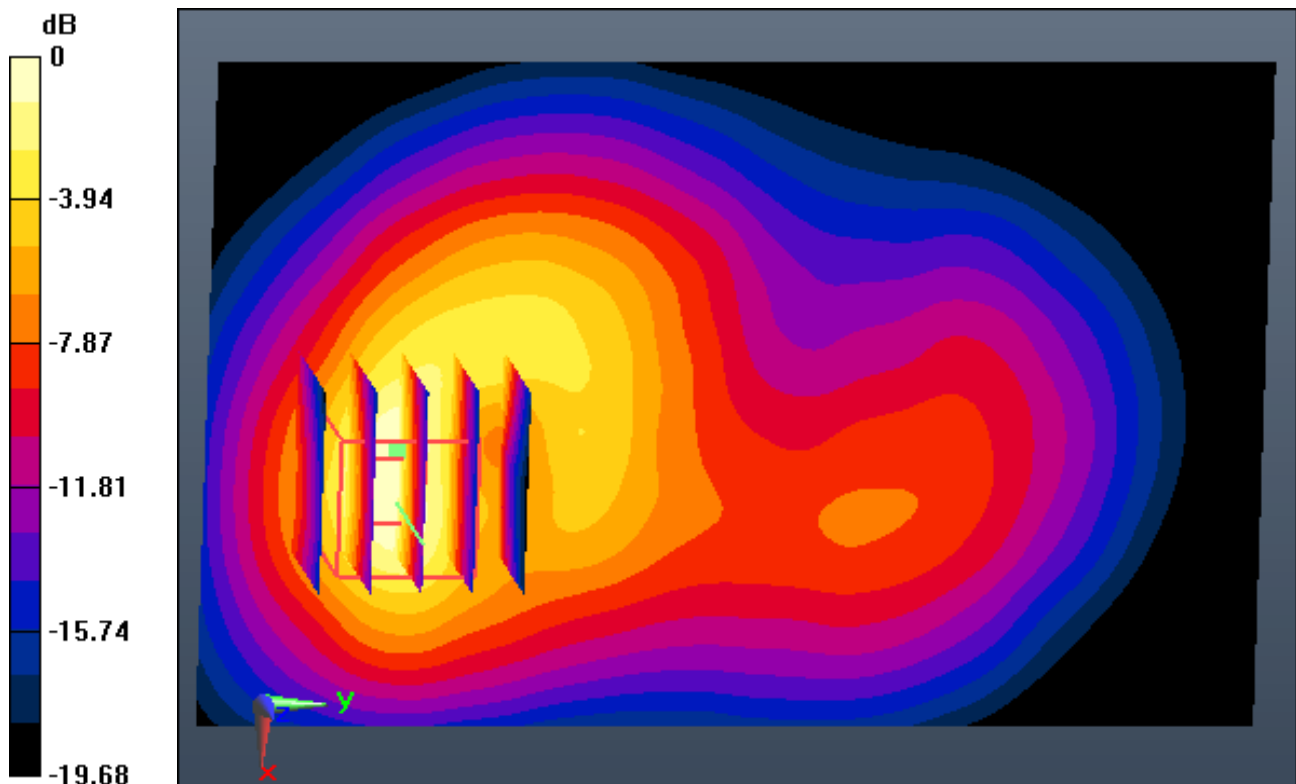

0 dB = 1.62 W/kg

DIGITAL EMC CO., LTD

DUT: LG-D160j; Type: Bar

Communication System: WCDMA 1900 (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.468$ S/m; $\epsilon_r = 52.356$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(7.79, 7.79, 7.79); Calibrated: 9/24/2013; Electronics: DAE4 Sn1396
Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-18; Ambient Temp: 20.9; Tissue Temp: 21.4

1 cm space from Body, Rear, WCDMA1900 Ch. 9262, Ant Internal


Area Scan (71x111x1): Interpolated grid: dx=15mm, dy=15mm

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.99 W/kg

SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.575 W/kg

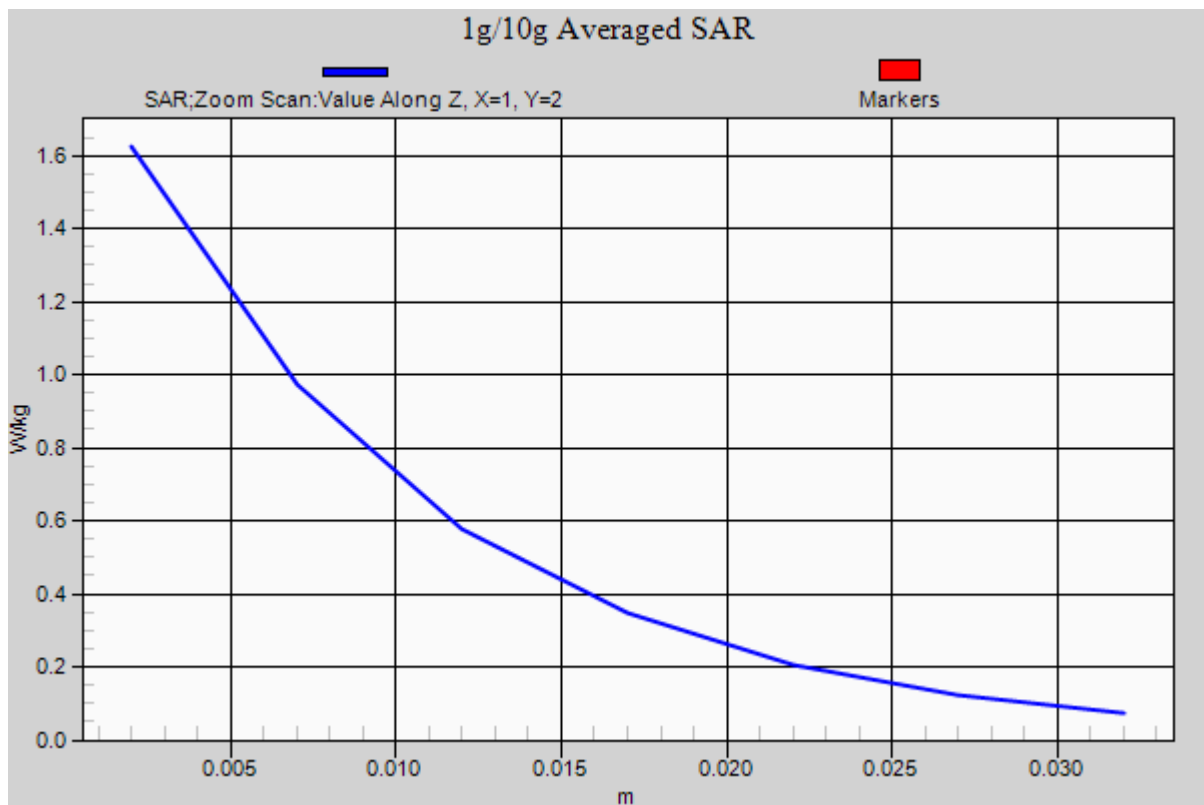

DIGITAL EMC CO., LTD

DUT: LG-D160j; Type: Bar

Communication System: W-LAN (0); Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.949 \text{ S/m}$; $\epsilon_r = 51.529$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(7.36, 7.36, 7.36); Calibrated: 9/24/2013; Electronics: DAE4 Sn1396
Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-20; Ambient Temp: 20.7; Tissue Temp: 21.1

1 cm space from Body, Rear, W-LAN(802.11b) Ch. 1, Ant Internal


Scan (141x161x1): Interpolated grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.294 W/kg

SAR(1 g) = 0.156 W/kg; SAR(10 g) = 0.082 W/kg

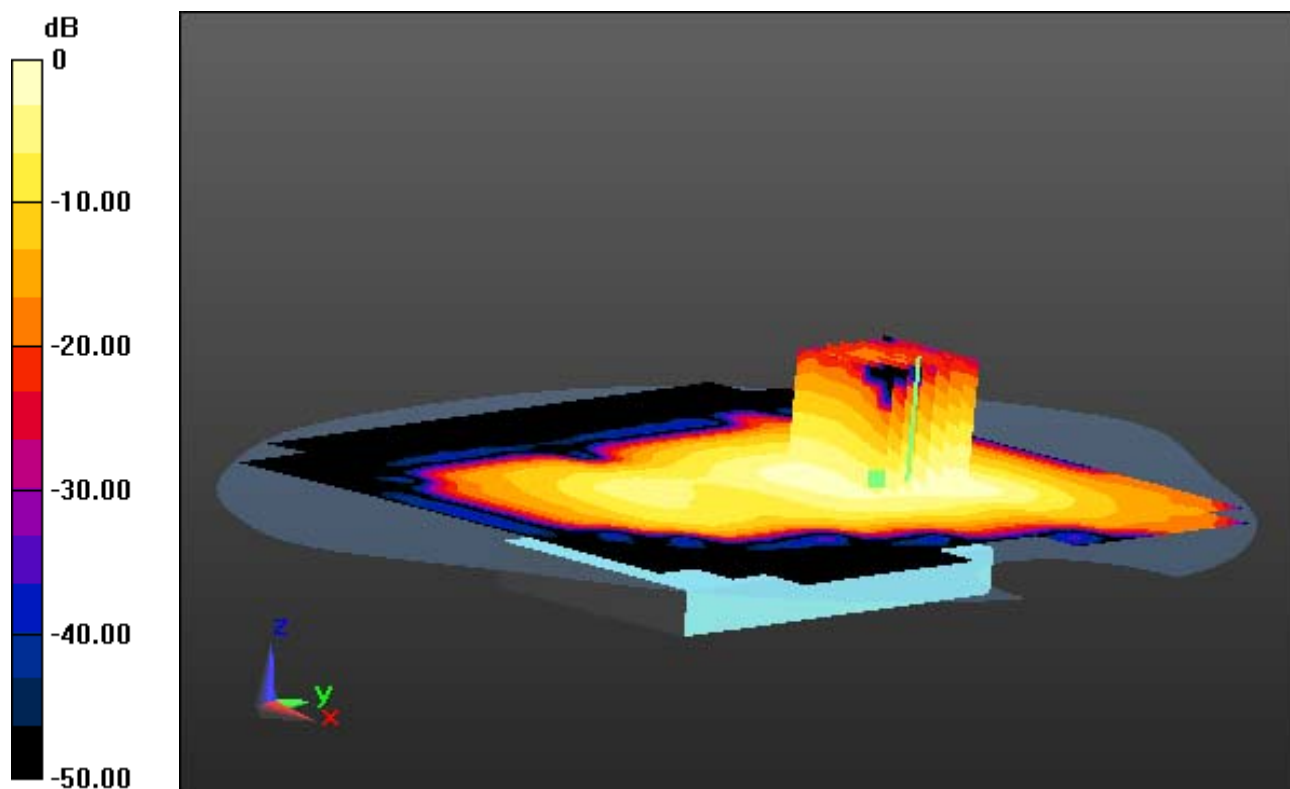

0 dB = 0.221 W/kg

DIGITAL EMC CO., LTD

DUT: LG-D160j; Type: Bar

Communication System: W-LAN (0); Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.949 \text{ S/m}$; $\epsilon_r = 51.529$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(7.36, 7.36, 7.36); Calibrated: 9/24/2013; Electronics: DAE4 Sn1396
Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-20; Ambient Temp: 20.7; Tissue Temp: 21.1

1 cm space from Body, Rear, W-LAN(802.11b) Ch. 1, Ant Internal

With Enlarge plot image


Area Scan (141x161x1): Interpolated grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.294 W/kg

SAR(1 g) = 0.156 W/kg; SAR(10 g) = 0.082 W/kg

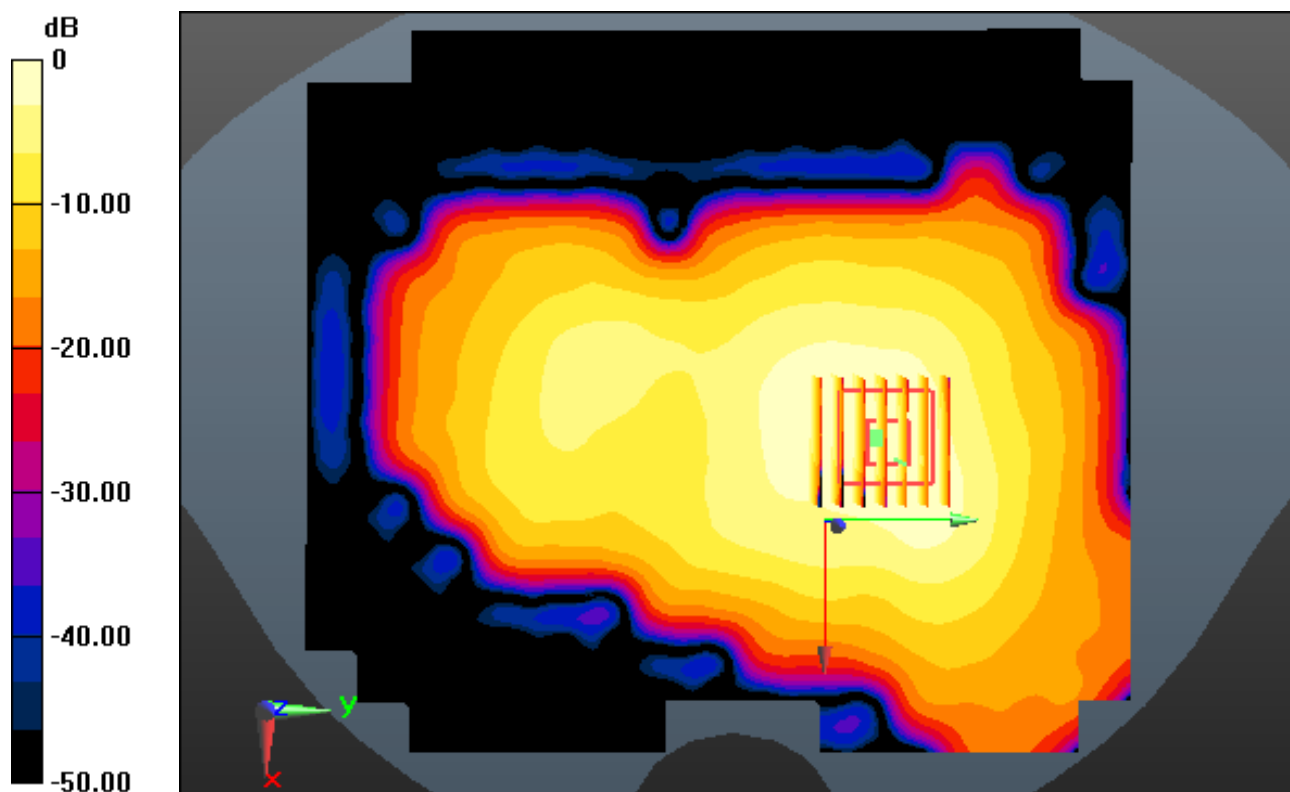

0 dB = 0.221 W/kg

DIGITAL EMC CO., LTD

DUT: LG-D160j; Type: Bar

Communication System: W-LAN (0); Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412$ MHz; $\sigma = 1.949$ S/m; $\epsilon_r = 51.529$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3933; ConvF(7.36, 7.36, 7.36); Calibrated: 9/24/2013; Electronics: DAE4 Sn1396
Phantom: SAM with CRP_2013_10_08_middle; Type: QD000P40CD; Serial: TP:1786
Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Test Date: 2014-02-20; Ambient Temp: 20.7; Tissue Temp: 21.1

1 cm space from Body, Rear, W-LAN(802.11b) Ch. 1, Ant Internal

Area Scan (141x161x1): Interpolated grid: dx=12mm, dy=12mm

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.294 W/kg

SAR(1 g) = 0.156 W/kg; SAR(10 g) = 0.082 W/kg

