

EMC TEST REPORT

Test item : Mobile Handset
Model No. : LG-D722v
Order No. : DEMC1405-02062
Date of receipt : 2014-05-29
Test duration : 2014-07-06
Date of Issue : 2014-07-07

Applicant : LG Electronics MobileComm U.S.A., Inc.
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Test laboratory : Digital EMC Co., Ltd.
42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 449-935

Test specification : ANSI C 63.4:2009
FCC Part 15 Subpart B
(Class B personal computers and peripherals)

Test environment : Temperature : (23 ~ 24) °C,
Humidity : (47 ~ 50) % R.H.

Test result : Comply Not Comply

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose.
This test report shall not be reproduced except in full, without the written approval of DIGITAL EMC CO., LTD.

Tested by:



Engineer
YongKi Kim

Reviewed by:



Manager
YoungKyu Shin

PRESIDENT OF DIGITAL EMC CO., LTD.

CONTENTS

1. General Remarks	3
2. Test Laboratory	3
3. General Information of EUT	4
4. Test Summary	5
4.1 Applied standards and test results	5
4.2 Test environment and conditions	5
4.3 Test result Summary	5
5. Test Set-up and operation mode	6
5.1 Principle of Configuration Selection	6
5.2 Test Operation Mode	6
5.3 Support Equipment Used	6
6. Test Results : Emission	7
6.1 Conducted Disturbance	7
6.2 Radiated Disturbance	10
Appendix 1	18
List of Test and Measurement Instruments	18
Appendix 2	20
Report Revision History	20

1. General Remarks

This report contains the result of tests performed by:

DIGITAL EMC CO., LTD.

Address : 42, Yurim-ro 154beon-gil, Cheoin-Gu, Yongin-Si, Gyeonggi-Do, Korea, 449-935

<http://www.dtn.net>

Tel: +82-31-321-2664 Fax: +82-31-321-1664

2. Test Laboratory

Digital EMC Co., Ltd. has been accredited / filed / authorized by the agencies listed in the following table;

Certificate	Nation	Agency	Code	Mark
Accreditation	Korea	KOLAS	393	ISO/IEC 17025
Site Filing	USA	FCC	KR0034 101842 678747 596748	Accredited 2.948 Listed
	Canada	IC	5740A-1 5740A-2	Registered
	Japan	VCCI	C-1427 R-1364, R-3385, R-4076, T-1442, G-338, G754	Registered
Certification	Korea	KC	KR0034	Designation
	Germany	TUV	CARAT 13 11 86721 001	ISO/IEC 17025

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the "General requirements for the competent of calibration and testing laboratory".

3. General Information of EUT

Model No.	LG-D722v
Serial No	NONE
FCC ID	ZNFD722V
Supplied Power for Test	AC 120 V, 60 Hz
Operation Frequency	1.2 GHz
Applicant	LG Electronics MobileComm U.S.A., Inc. 1000 Sylvan Avenue, Englewood Cliffs NJ 07632
Manufacturer	LG Electronics MobileComm U.S.A., Inc. 1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Related Submittal(s) / Grant(s)

Original submittal only.

4. Test Summary

4.1 Applied standards and test results

Test Items	Applied Standards	Results
Conducted Disturbance	ANSI C63.4:2009	C
Radiated Disturbance	ANSI C63.4:2009	C
C=Comply N/C=Not Comply N/T=Not Tested N/A=Not Applicable		

The data in this test report are traceable to the national or international standards.

4.2 Test environment and conditions

Test Items	Test date (YYYY-MM-DD)	Temp (°C)	Humidity (% R.H.)
Conducted Disturbance	2014-07-06	24	50
Radiated Disturbance	2014-07-06	23	47

4.3 Test result Summary

(1) Conducted Emission

Frequency [MHz]	Phase	Result [dB μ V]	Detector	Limit [dB μ V]	Margin [dB]
3.65080	N	38.5	Average	46.0	7.5

(2) Radiated Emission

Frequency [MHz]	Pol.	Result [dB(μ V/m)]	Detector	Limit [dB(μ V/m)]	Margin [dB]
891.001	V	42.3	Quasi-Peak	46.0	3.7

5. Test Set-up and operation mode

5.1 Principle of Configuration Selection

Emission : The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

5.2 Test Operation Mode

- PC link mode (The measurement was made of the maximized by: Write/Delete the “H” pattern mode; Data; data exchange speed; moving the cable.)

5.3 Support Equipment Used

Unit	Model No.	Serial No.	Manufacturer	CABLE			Backshell	FCC ID
				Connect type	Length (m)	shield		
LCD Monitor	M2450D-PN	202KCRN8Q582	LG	Power DVI	1.5 1.5	Non-shield Shield	Plastic Plastic	DOC
Adapter	PA-1650-68	OBDDN612314038111	LITE-ON TECHNOLOGY	Power	1.5	Non-shield	Plastic	Ver
Keyboard	SKG-2500UW	TAKZ125009J	MONITREY INTERNATIONAL CORP.	USB	1.5	Non-shield	Plastic	DOC
Mouse	M-U0031-O	590509-002	HP	USB	1.5	Non-shield	Plastic	DOC
PC	OPTIPLEX 330	F92QFBX	Dell	Power DVI LAN Stereo USB USB USB LPT (Parallel)	1.8 1.5 10.0 2.0 1.5 1.5 0.5 2.0	Non-shield Shield Non-shield Non-shield Non-shield Non-shield Shield Non-shield	Plastic Plastic Plastic Plastic Plastic Plastic Plastic Plastic	DOC
External HDD	9ZR8N1-500	NA0H2L7Z	Seagate	USB	0.5	Shield	Plastic	DOC
Printer	EPSON AcuLaser M1200	LWTZ181070	EPSON	Power LPT (Parallel)	1.8 2.0	Non-shield Non-shield	Plastic Plastic	DOC
Head Set	COV903	N/A	Cosy	Stereo	2.0	Non-shield	Plastic	DOC

6. Test Results : Emission

6.1 Conducted Disturbance

6.1.1 Measurement Procedure

In the range of 0.15 MHz to 30 MHz, the conducted disturbance was measured and set-up was made accordance with **ANSI C63.4**.

If the EUT is table top equipment, it was placed on a wooden table with a height of 0.8 m above the reference ground plane and 0.4 m from the conducting wall of the shielded room.

Also if the EUT is floor-standing equipment, it was placed on a non-conducted support with a height up to 0.15 m above the reference ground plane.

Connect the EUT's power source lines to the PC power through the LISN.

All the other peripherals are connected to the 2nd LISN, if any.

Unused measuring port of the LISN was resistively terminated by 50 ohm terminator.

The measuring port of the LISN for EUT was connected to spectrum analyzer.

Using conducted emission test software, the emissions were scanned with peak detector mode.

After scanning over the frequency range, suspected emissions were selected to perform final measurement. When performing final measurement, the receiver was used which has Quasi-Peak detector and Average detector.

By varying the configuration of the test sample and the cable routing it was attempted to maximize the emission.

For further description of the configuration refer to the picture of the test set-up.

6.1.2 Limit for Conducted Disturbance

(1) Conducted disturbance at mains ports.

Frequency range (MHz)	Limits dB(μV)			
	Quasi-peak		Average	
	Class A	Class B	Class A	Class B
0.15 to 0.50	79	66 to 56	66	56 to 46
0.50 to 5	73	56	60	46
5 to 30		60		50

Note 1 The lower limit shall apply at the transition frequencies.
 Note 2 The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

- Note) 1. Emission Level = Reading Value + Correction Factor.
 2. Correction Factor = Cable Loss + Insertion Loss of LISN
 3. Margin = Limit - Emission level



Test Result

Results of Conducted Emission

Digital EMC
Date : 2014-07-06

Model No.	: DEMC1405-02062	Reference No.	:
Type	:	Power Supply	: 120 V 60 Hz
Serial No.	:	Temp/Humi.	: 24 °C 50 Hz
Test Condition	:	Operator	:

Memo :
LIMIT : CISPR22_B QP
CISPR22_B AV

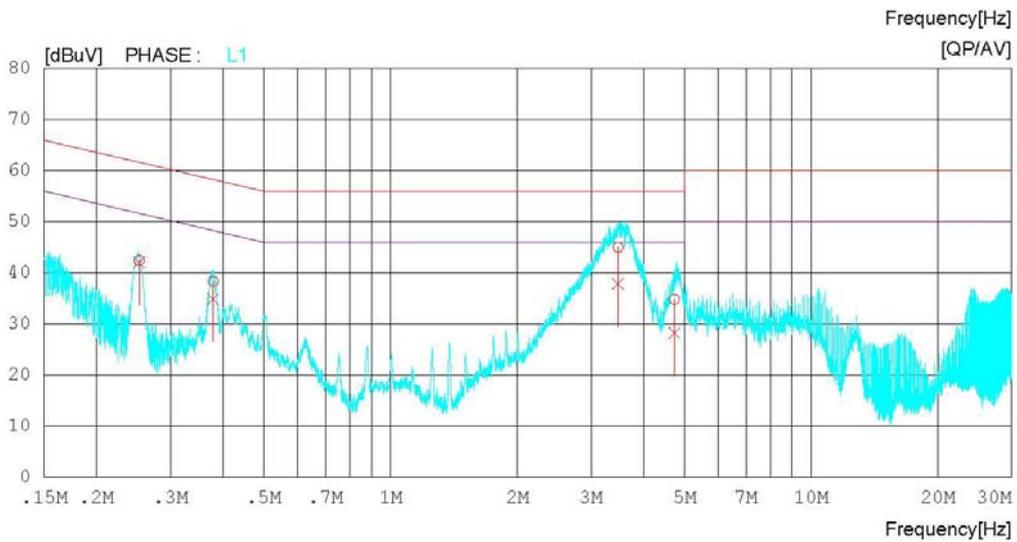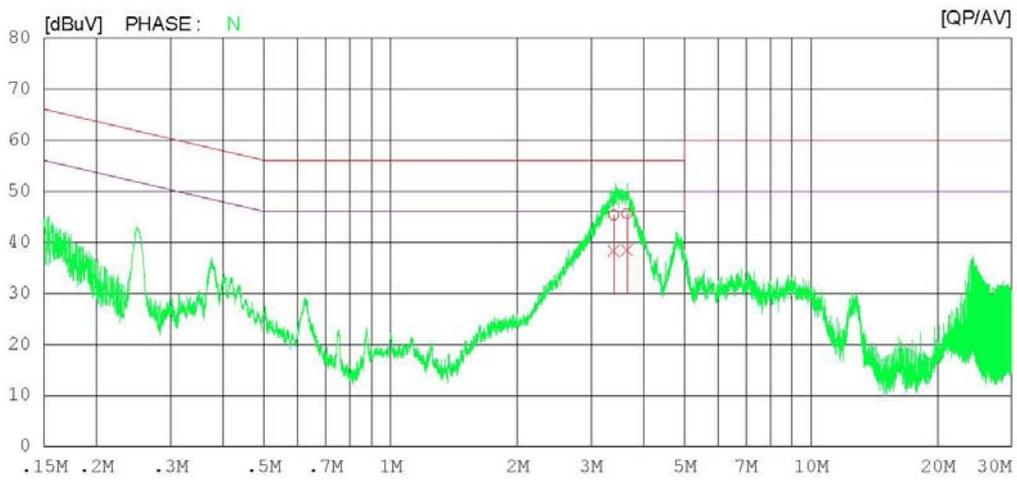

Results of Conducted Emission

Digital EMC
 Date : 2014-07-06

Model No.	: DEMC1405-02062	Reference No.	:
Type	:	Power Supply	: 120 V 60 Hz
Serial No.	:	Temp/Humi.	: 24 °C 50 Hz
Test Condition	:	Operator	:

Memo :

LIMIT : CISPR22_B QP
 CISPR22_B AV

NO	FREQ [MHz]	READING		C. FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	
1	3.39440	44.8	37.7	0.5	45.3	38.2	56.0	46.0	10.7	7.8	N
2	3.65080	45.1	38.0	0.5	45.6	38.5	56.0	46.0	10.4	7.5	N
3	0.25229	42.2	41.8	0.2	42.4	42.0	61.7	51.7	19.3	9.7	L1
4	0.37863	38.1	34.7	0.3	38.4	35.0	58.3	48.3	19.9	13.3	L1
5	3.47560	44.5	37.4	0.5	45.0	37.9	56.0	46.0	11.0	8.1	L1
6	4.73260	34.3	27.8	0.5	34.8	28.3	56.0	46.0	21.2	17.7	L1

6.2 Radiated Disturbance

6.2.1 Measurement Procedure

The radiated disturbance was measured and set-up was made accordance with **ANSI C63.4**.

If the EUT is tabletop equipment, it was placed on a wooden table with a height of 0.8 m above the reference ground plane and 3 m or 10 m away from the interference receiving antenna in the **10m semi-anechoic chamber**.

Also if the EUT is floor-standing equipment, it was placed on a non-conducted support with a height up to 0.15 m above the reference ground plane.

Rotate the EUT from (0 - 360)° and position the receiving antenna at heights from (1 - 4) m above the reference ground plane continuously to determine associated with higher emission levels and record them.

The measurement was made in both the vertical and horizontal polarization, and the maximum value is presented in the report.

For below 1 GHz frequency range, Quasi-Peak detector with 120 kHz RBW was used.

Peak detector with 1 MHz RBW and 1 MHz VBW were used for above 1 GHz frequency range, also used linear average detector with defined in CISPR 16-1-1.

For further description of the configuration refer to the picture of the test set-up.

6.2.2 Limit for Radiated Disturbance

- The test frequency range of Radiated Disturbance measurements are listed below.

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 108	1 000
108 – 500	2 000
500 – 1 000	5 000
Above 1 000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

(1) Limit for Radiated Emission below 1 000MHz

Frequency range (MHz)	Class A Equipment (10 m distance)	Class B Equipment (3 m distance)
	Quasi-peak (dB μ V/m)	Quasi-peak (dB μ V/m)
30 to 88	39.1	40
88 to 216	43.5	43.5
216 to 960	46.4	46
960 to 1 000	49.5	54

Note 1 The lower limit shall apply at the transition frequency.

Note 2 Additional provisions may be required for cases where interference occurs.

Note 3 According to 15.109(g), as an alternative to the radiated emission limit shown above, digital devices may be shown to comply with the standards(CISPR), Pub. 22 shown as below.

Frequency range (MHz)	Class A Equipment (10 m distance)	Class B Equipment (10 m distance)
	Quasi-peak (dB μ V/m)	Quasi-peak (dB μ V/m)
30 to 230	40	30
230 to 1 000	47	37

(2) Limits for Radiated Emission above 1 000MHz at a measuring distance of 3 m

Frequency (GHz)	Class A Equipment		Class B Equipment	
	Peak (dB μ V/m)	Average (dB μ V/m)	Peak (dB μ V/m)	Average (dB μ V/m)
1 to 40	80	60	74	54

Note)1. Emission Level = Reading Value + loss - gain + Ant Factor

2. Margin = Limit - Emission level

3. loss = Cable loss, gain = Amp gain, Ant Factor = Antenna Factor

Test Result

< 30 MHz ~ 1 GHz >

RADIATED EMISSION



Date : 2014-07-06

Model Name : DEMC1405-02062
Model No. :
Serial No. :
Test Condition :

Reference No. :
Power Supply : 120 V 60 Hz
Temp/Humi : 23 °C 47 % R.H.
Operator :

Memo :

LIMIT : FCC Part15 Subpart.B Class B (3m)
MARGIN: 3 dB

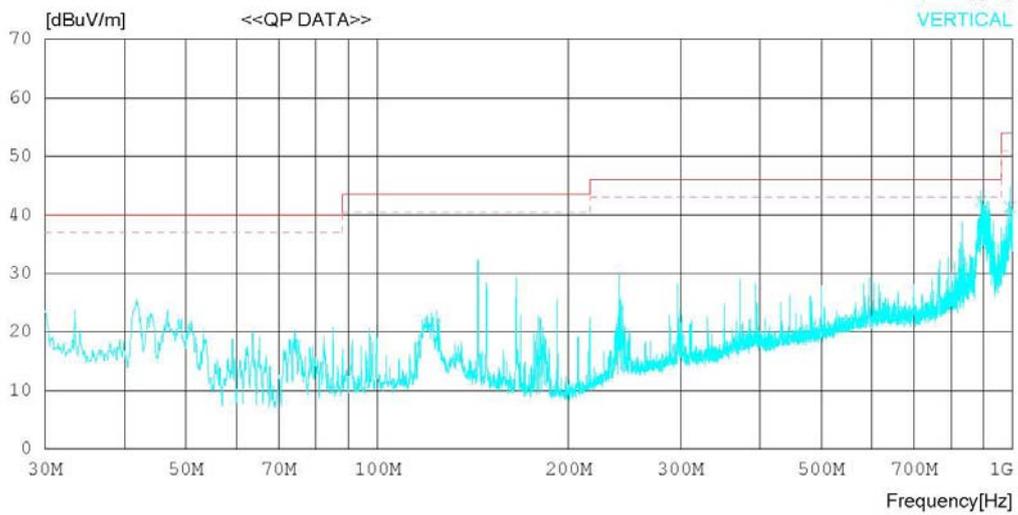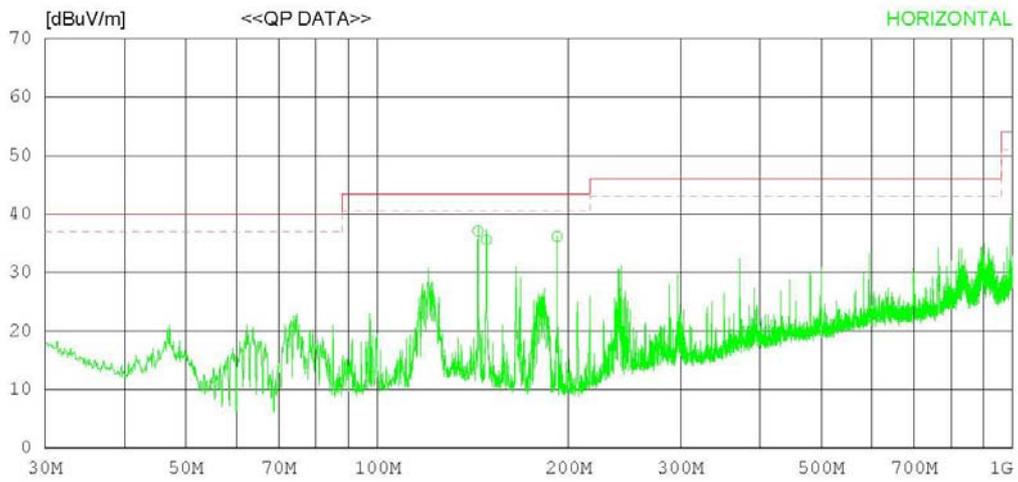

RADIATED EMISSION

Date : 2014-07-06

Model Name : DEMC1405-02062	Reference No. :
Model No. :	Power Supply : 120 V 60 Hz
Serial No. :	Temp/Humi : 23 °C 47 % R.H.
Test Condition :	Operator :

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m)
 MARGIN: 3 dB

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	144.000	47.2	11.0	1.7	22.8	37.1	43.5	6.4	300	118
2	148.459	46.1	10.6	1.7	22.8	35.6	43.5	7.9	200	296
3	191.989	48.3	9.0	1.8	23.0	36.1	43.5	7.4	200	360
----- Vertical -----										
4	891.001	38.8	22.1	4.2	22.8	42.3	46.0	3.7	100	360
5	896.666	34.5	22.1	4.2	22.8	38.0	46.0	8.0	100	360
6	990.023	36.5	23.0	4.4	22.5	41.4	54.0	12.6	200	0



< (1 ~ 18) GHz _ Peak >

RADIATED EMISSION

Date : 2014-07-06

Model Name	: DEMC1405-02062	Reference No.	:
Model No.	:	Power Supply	: 120 V 60 Hz
Serial No.	:	Temp/Humi	: 23 °C 47 % R.H.
Test Condition	:	Operator	:
Memo	:		

LIMIT : FCC Part15 Subpart.B Class B (3m) - 18G(Peak)
FCC Part15 Subpart.B Class B (3m) - 18G(Avg)

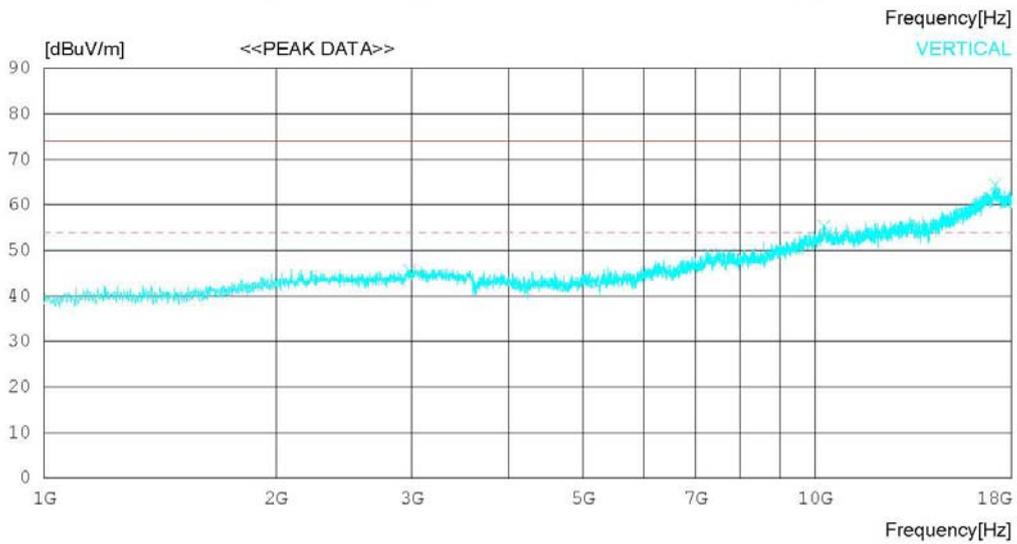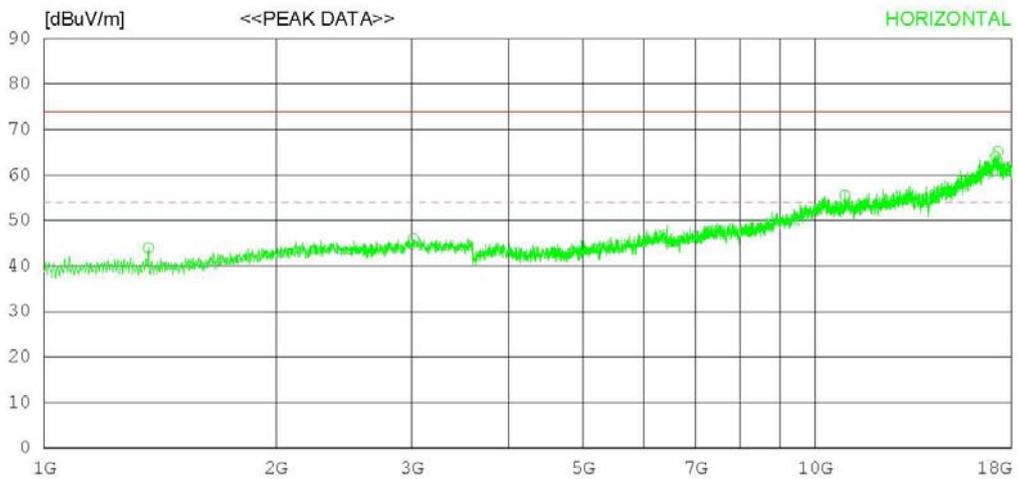

RADIATED EMISSION

Date : 2014-07-06

Model Name : DEMC1405-02062	Reference No. :
Model No. :	Power Supply : 120 V 60 Hz
Serial No. :	Temp/Humi : 23 °C 47 % R.H.
Test Condition :	Operator :

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Peak)
 FCC Part15 Subpart B Class B (3m) - 18G(Avg)

No.	FREQ [MHz]	READING PEAK [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1365.500	52.6	28.8	2.0	39.4	44.0	74.0	30	100	234
2	3016.625	47.9	33.2	3.4	38.5	46.0	74.0	28	100	1
3	10932.250	46.3	38.2	9.7	38.6	55.6	74.0	18.4	100	109
4	17150.000	45.0	41.9	12.4	35.2	64.1	74.0	9.9	100	1
5	17279.630	46.1	41.9	12.4	35.2	65.2	74.0	8.8	100	1
----- Vertical -----										
6	2982.625	47.6	33.2	3.4	38.5	45.7	74.0	28.3	100	0
7	7315.500	44.0	36.0	7.4	38.3	49.1	74.0	24.9	100	0
8	10294.750	45.2	37.9	10.1	37.8	55.4	74.0	18.6	100	2
9	17162.750	45.4	41.9	12.4	35.2	64.5	74.0	9.5	100	199



< (1 ~ 18) GHz _ Average >

RADIATED EMISSION

Date : 2014-07-06

Model Name	: DEMC1405-02062	Reference No.	:
Model No.	:	Power Supply	: 120 V 60 Hz
Serial No.	:	Temp/Humi	: 23 °C 47 % R.H.
Test Condition	:	Operator	:
Memo	:		

LIMIT : FCC Part15 Subpart.B Class B (3m) - 18G(Avg)
FCC Part15 Subpart.B Class B (3m) - 18G(Peak)

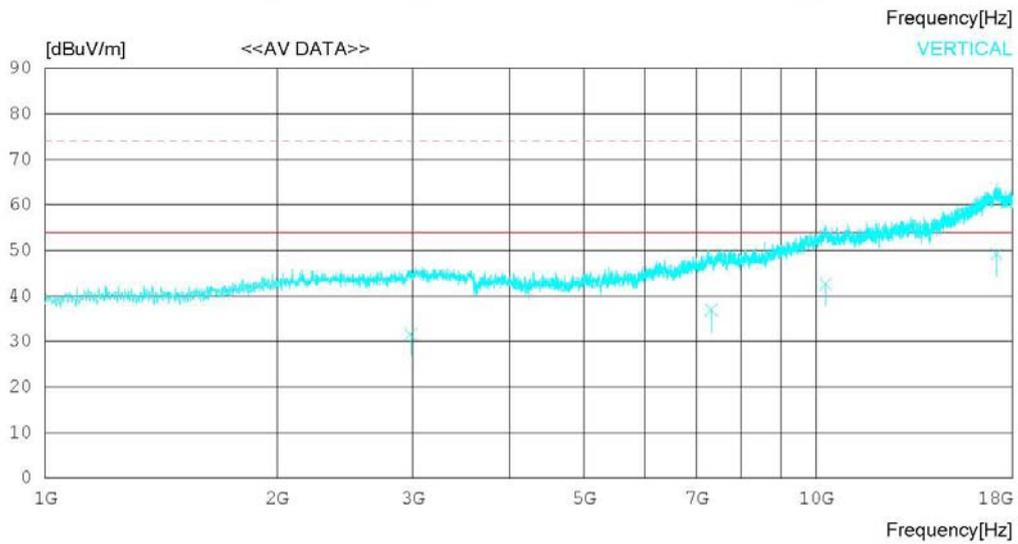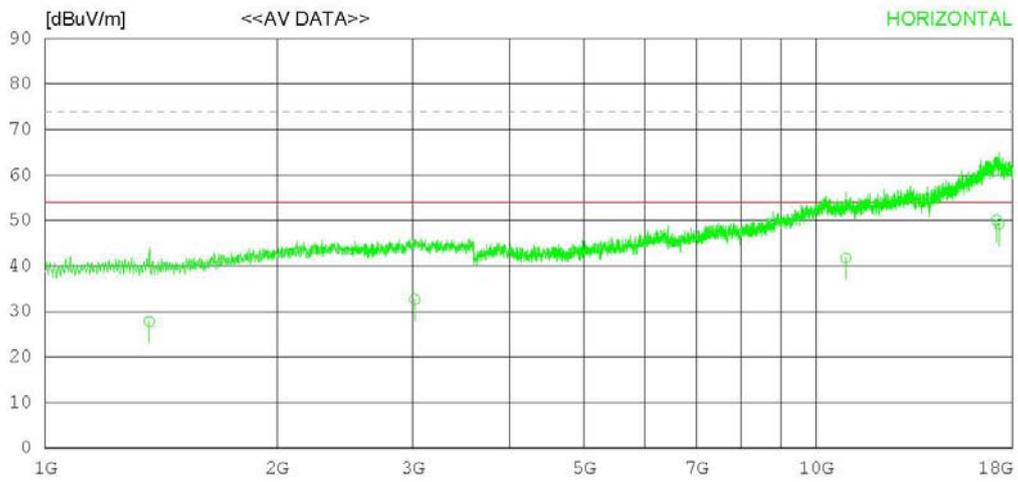

RADIATED EMISSION

Date : 2014-07-06

Model Name : DEMC1405-02062	Reference No. :
Model No. :	Power Supply : 120 V 60 Hz
Serial No. :	Temp/Humi : 23 °C 47 % R.H.
Test Condition :	Operator :

Memo :

LIMIT : FCC Part15 Subpart B Class B (3m) - 18G(Avg)
 FCC Part15 Subpart B Class B (3m) - 18G(Peak)

No.	FREQ [MHz]	READING AV [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	1365.283	36.4	28.8	2.0	39.4	27.8	54.0	26.2	100	283
2	3016.236	34.6	33.2	3.4	38.5	32.7	54.0	21.3	100	360
3	10932.250	31.7	38.2	9.3	37.4	41.8	54.0	12.2	100	171
4	17149.770	31.0	41.9	12.4	35.2	50.1	54.0	3.9	100	360
5	17279.340	30.3	41.9	12.3	35.3	49.2	54.0	4.8	100	0
----- Vertical -----										
6	2982.016	33.5	33.2	3.4	38.5	31.6	54.0	22.4	100	360
7	7314.952	31.8	36.0	7.4	38.3	36.9	54.0	17.1	100	11
8	10294.120	32.5	37.9	10.1	37.8	42.7	54.0	11.3	100	360
9	17162.240	30.1	41.9	12.4	35.2	49.2	54.0	4.8	100	200

Appendix 1

List of Test and Measurement Instruments

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment is identified by the Test Laboratory.

1. Conducted Disturbance

Name of Instrument	Model No.	Manufacturer	Serial No.	Cal. Date	Next Cal. Date
<input checked="" type="checkbox"/> MEASUREMENT SOFTWARE	EMI-C VER. 2.00.0143	TSJ	N/A	N/A	N/A
<input type="checkbox"/> SPECTRUM ANALYZER	8591E	H/P	3649A05889	2014.02.27	2015.02.27
<input type="checkbox"/> RFI/FIELD INTENSITY METER	KNM-2402	KYORITSU	4N-170-3	2013.06.28	2014.06.28
<input type="checkbox"/> LISN	KNW-407	KYORITSU	8-317-8	2014.01.08	2015.01.08
<input type="checkbox"/> ARTIFICIAL MAINS NETWORK	PMM L2-16B	NARDA S.T.S. / PMM	000WX20305	2013.06.27	2014.06.27
<input type="checkbox"/> 50 OHM TERMINATOR	CT-01	TME	N/A	2014.01.08	2015.01.08
<input checked="" type="checkbox"/> EMI TEST RECEIVER	ESCI	ROHDE & SCHWARZ	100364	2014.02.27	2015.02.27
<input checked="" type="checkbox"/> LISN	ESH2-Z5	ROHDE & SCHWARZ	828739/006	2013.09.12	2014.09.12
<input checked="" type="checkbox"/> LISN	LISN1600	TTI	197204	2013.06.28	2014.06.28
<input checked="" type="checkbox"/> 50 OHM TERMINATOR	CT-01	TME	N/A	2014.01.08	2015.01.08

2. Radiated Disturbance

Name of Instrument	Model No.	Manufacturer	Serial No.	Cal. Date	Next Cal. Date
<input checked="" type="checkbox"/> MEASUREMENT SOFTWARE	EMI-R VER. 2.00.0121	TSJ	N/A	N/A	N/A
<input checked="" type="checkbox"/> EMI TEST RECEIVER	ESCI	ROHDE & SCHWARZ	100364	2014.02.27	2015.02.27
<input checked="" type="checkbox"/> BILOG ANTENNA	CBL6112B	SCHAFFNER	2737	2012.11.06	2014.11.06
<input checked="" type="checkbox"/> HORN ANTENNA	3117	ETS-LINDGREN	00152093	2014.04.30	2016.04.30
<input checked="" type="checkbox"/> AMPLIFIER	8447E	H/P	2945A02865	2014.01.08	2015.01.08
<input checked="" type="checkbox"/> AMPLIFIER	8449B	AGILENT	3008A01590	2014.02.27	2015.02.27
<input type="checkbox"/> SPECTRUM ANALYZER	E4411B	AGILENT	US41062735	2013.06.27	2014.06.27
<input type="checkbox"/> AMPLIFIER	8447D	AGILENT	2443A03690	2013.06.28	2014.06.28
<input type="checkbox"/> EMI TEST RECEIVER	ESCI	ROHDE & SCHWARZ	100364	2014.02.27	2015.02.27
<input type="checkbox"/> BICONICAL ANT.	VHA 9103	SCHWARZBECK	91032789	2012.10.04	2014.10.04
<input type="checkbox"/> LOG-PERIODIC ANT.	UHALP 9108A	SCHWARZBECK	590	2012.10.04	2014.10.04
<input type="checkbox"/> AMPLIFIER	MLA-100K01-B01-26	TSJ	1252741	2014.02.28	2015.02.28

Appendix 2

Report Revision History

Revision Date	Description	Revised By	Revision Reviewed By
None	Original	N/A	N/A