



**FCC CFR47 PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 8**

**BLUETOOTH LOW ENERGY
CERTIFICATION TEST REPORT**

FOR

**GSM/CDMA/WCDMA/LTE Phone + Bluetooth &
WLAN (2.4GHz & 5GHz) and NFC**

MODEL NUMBER: LG-D820, LGD820 and D820

FCC ID: ZNFD820

IC: 2703C-D820

REPORT NUMBER: 13U15420-3A

ISSUE DATE: JULY 31, 2013

Prepared for
**LG ELECTRONICS MOBILECOMM U.S.A., INC
100 SYLVAN AVENUE
ENGWOOD CLIFFS,
NEW JERSEY, 07632, U.S.A.**

Prepared by
**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	7/17/13	Initial Issue	P. Kim
A	7/31/13	Update labels and administrative information.	P. Kim

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>5</i>
4.2. <i>SAMPLE CALCULATION</i>	<i>5</i>
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>5</i>
5. EQUIPMENT UNDER TEST	6
5.1. <i>DESCRIPTION OF EUT</i>	<i>6</i>
5.2. <i>MAXIMUM OUTPUT POWER.....</i>	<i>6</i>
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>6</i>
5.4. <i>SOFTWARE AND FIRMWARE.....</i>	<i>6</i>
5.5. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	<i>7</i>
5.6. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>8</i>
6. TEST AND MEASUREMENT EQUIPMENT	10
7. ANTENNA PORT TEST RESULTS	11
7.1. <i>6 dB BANDWIDTH.....</i>	<i>11</i>
7.2. <i>99% BANDWIDTH.....</i>	<i>15</i>
7.3. <i>OUTPUT POWER.....</i>	<i>19</i>
7.4. <i>AVERAGE POWER.....</i>	<i>23</i>
7.5. <i>POWER SPECTRAL DENSITY.....</i>	<i>24</i>
7.6. <i>CONDUCTED SPURIOUS EMISSIONS.....</i>	<i>28</i>
8. RADIATED TEST RESULTS.....	35
8.1. <i>LIMITS AND PROCEDURE.....</i>	<i>35</i>
8.2. <i>TRANSMITTER ABOVE 1 GHz.....</i>	<i>36</i>
8.3. <i>TX ABOVE 1 GHz FOR BLUETOOTH LOW ENERGY MODE IN THE 2.4 GHz BAND</i> 36	
8.4. <i>WORST-CASE BELOW 1 GHz.....</i>	<i>53</i>
9. AC POWER LINE CONDUCTED EMISSIONS.....	56
10. SETUP PHOTOS	60

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: LG ELECTRONICS MOBILECOMM U.S.A., INC.
1000 SYLVAN AVENUE
ENGLEWOOD CLIFFS, NEW JERSEY 07632

EUT DESCRIPTION: GSM/CDMA/WCDMA + LTE Phone Bluetooth, WLAN
(2.4GHz & 5GHz) and NFC

MODEL: LG-D820, LGD820 and D820

SERIAL NUMBER: (0021EDF624E7C39B) CONDUCTED
(0021E9AAE056EE83) RADIATED

DATE TESTED: JULY 3 – JULY 9, 2013

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-210 Issue 8 Annex 8	Pass
INDUSTRY CANADA RSS-GEN Issue 3	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



PHILIP KIM
EMC SUPERVISOR
UL Verification Services Inc.

Tested By:



STEVEN TRAN
EMC ENGINEER
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 3, and RSS-210 Issue 8.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a LTE Phone Bluetooth, WLAN(2.4GHz & 5GHz) and NFC

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402-2480	BLE	8.42	6.95

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, with a maximum gain of -1.96 dBi.

5.4. SOFTWARE AND FIRMWARE

Software version was 3.4.0-g9f6ebe1-00072-gcee1ab4b

The firmware used was M8974A-0.0.19.0.01.

5.5. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that Z orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z orientation.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	LG	MCS.01WR	EAY62768913	N/A
Earphone	QuadBeat	LE 410	EAB62729001	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	1	Mini-Jack	Unshielded	1m	N/A

TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests. EUT was set in the Hidden menu mode to enable BLE communications.

SETUP DIAGRAM FOR TESTS

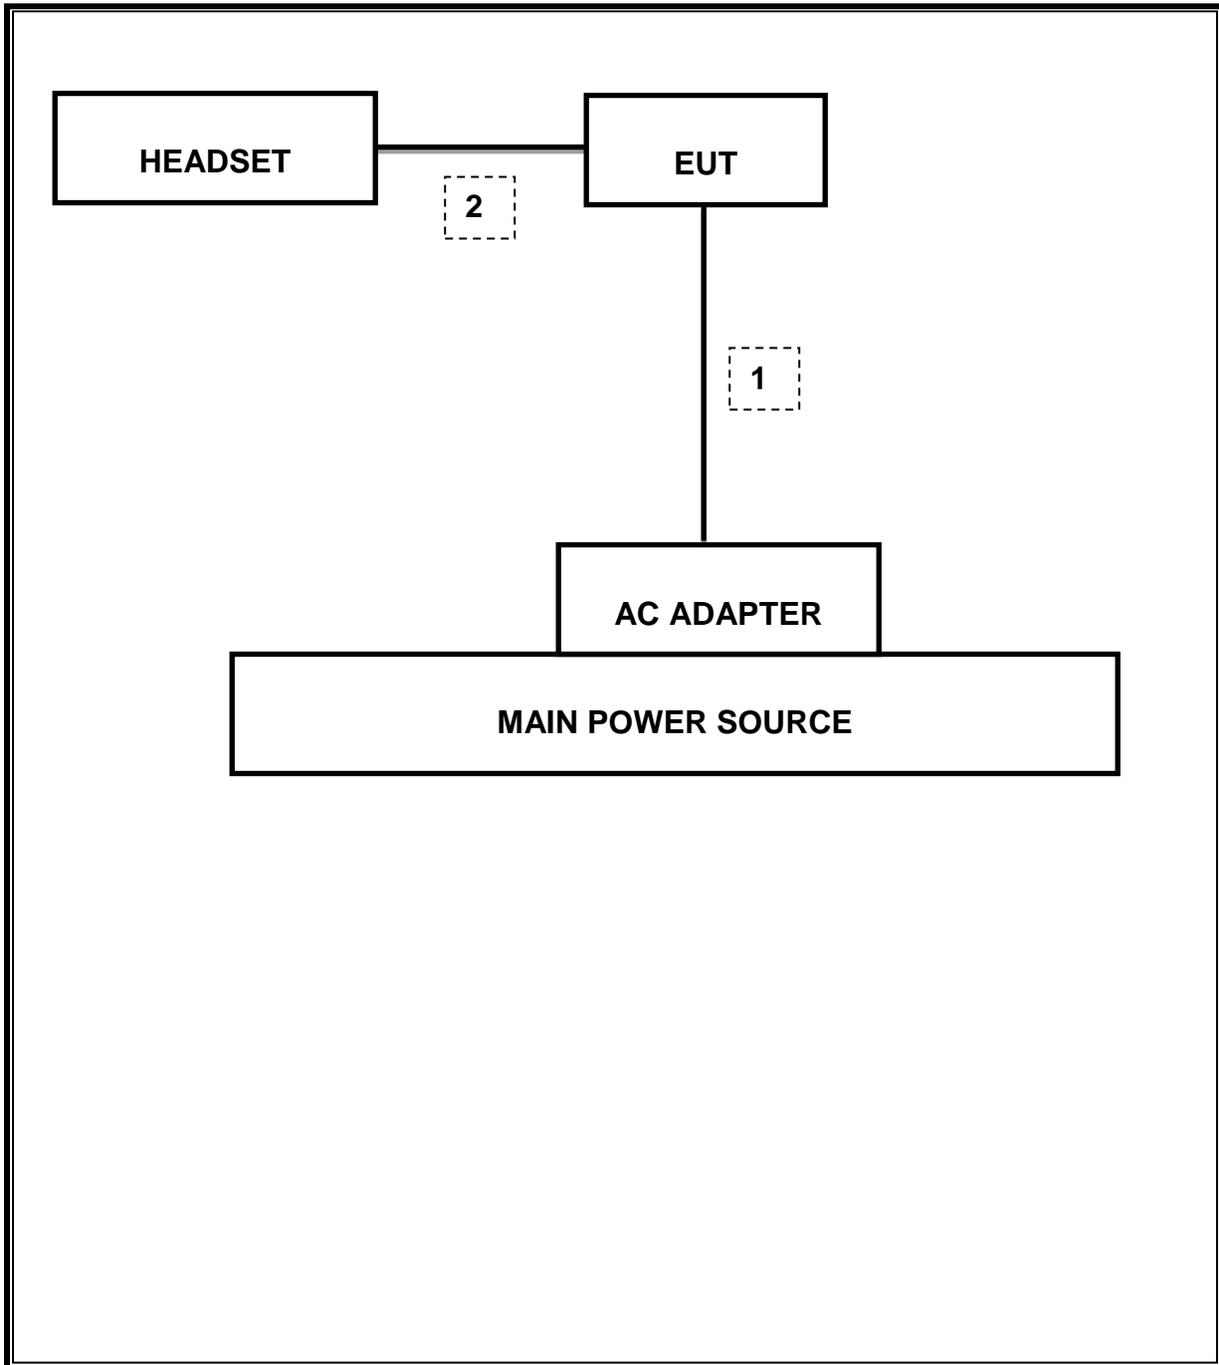

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List					
Description	Manufacturer	Model	Asset	Cal Date	Cal Due
Antenna, Biconolog, 30MHz-1 GHz	Sunol Sciences	JB1	C01171	03/23/12	02/13/14
Antenna, Horn, 18GHz	EMCO	3115	C00783	10/25/12	10/25/13
Antenna, Horn, 25.5 GHz	ARA	MWH-1826/B	C00980	11/14/12	11/14/13
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00580	01/28/13	01/28/14
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01052	10/22/12	10/22/13
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	12/20/12	12/20/13
CBT Bluetooth Tester	R & S	CBT	None	07/12/13	07/12/14
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/12	12/13/13
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/12	12/13/13
LISN, 30 MHz	FCC	50/250-25-2	C00626	01/14/13	01/14/14
Reject Filter, 2.4GHz	Micro-Tronics	BRM50702	N02684	CNR	CNR

7. ANTENNA PORT TEST RESULTS

7.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	0.6410	0.5
Middle	2440	0.6250	0.5
High	2480	0.6400	0.5

6 dB BANDWIDTH

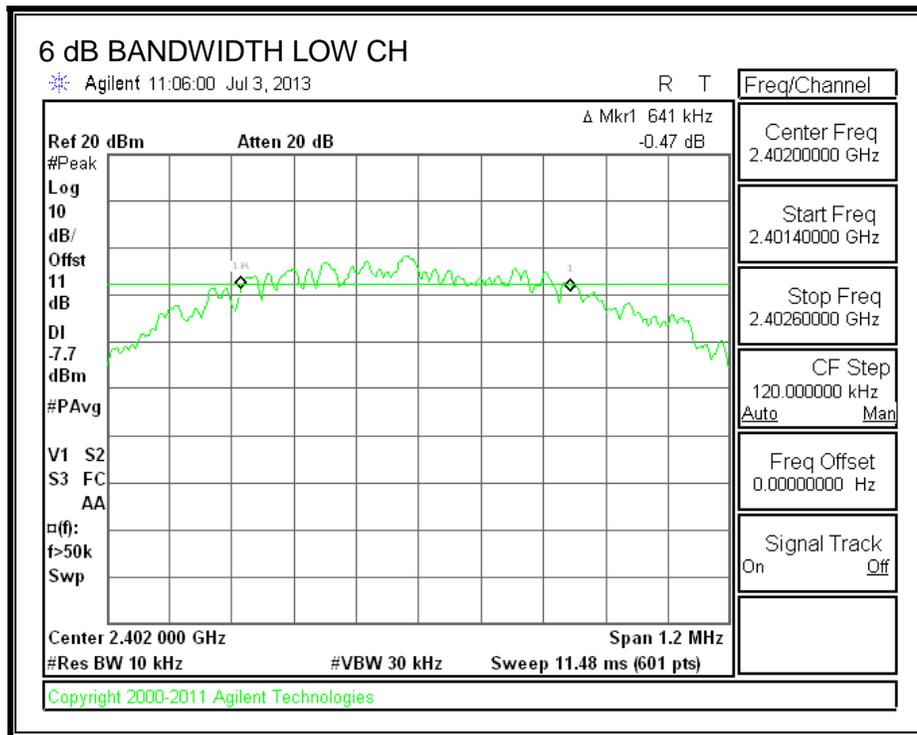

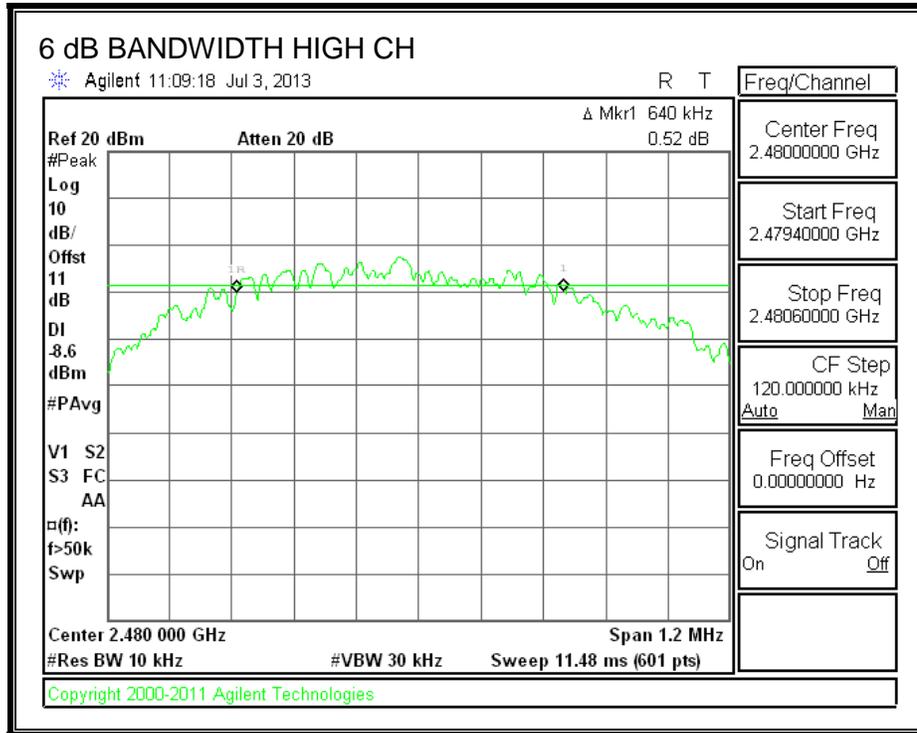

7.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.


TEST PROCEDURE


The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth and to 1% of the span. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.


RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.0471
Middle	2440	1.0463
High	2480	1.0515

99% BANDWIDTH

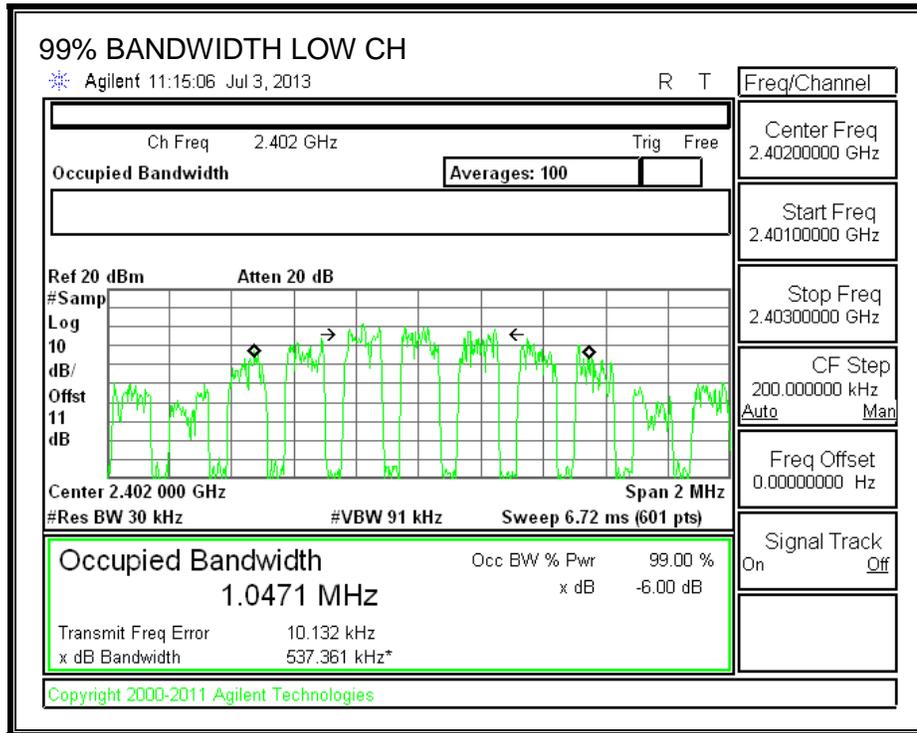

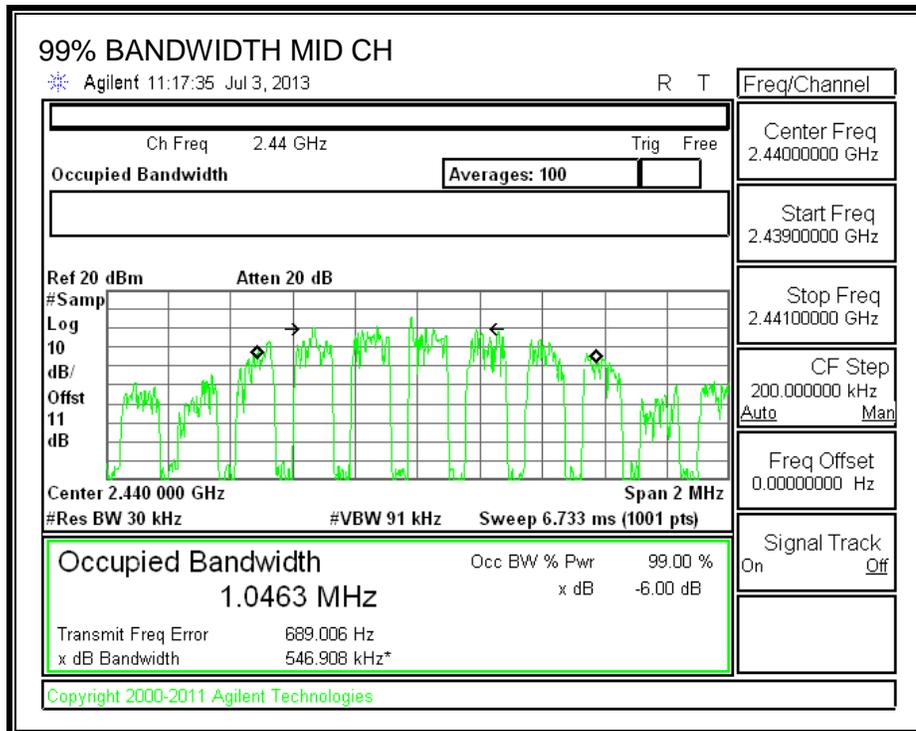

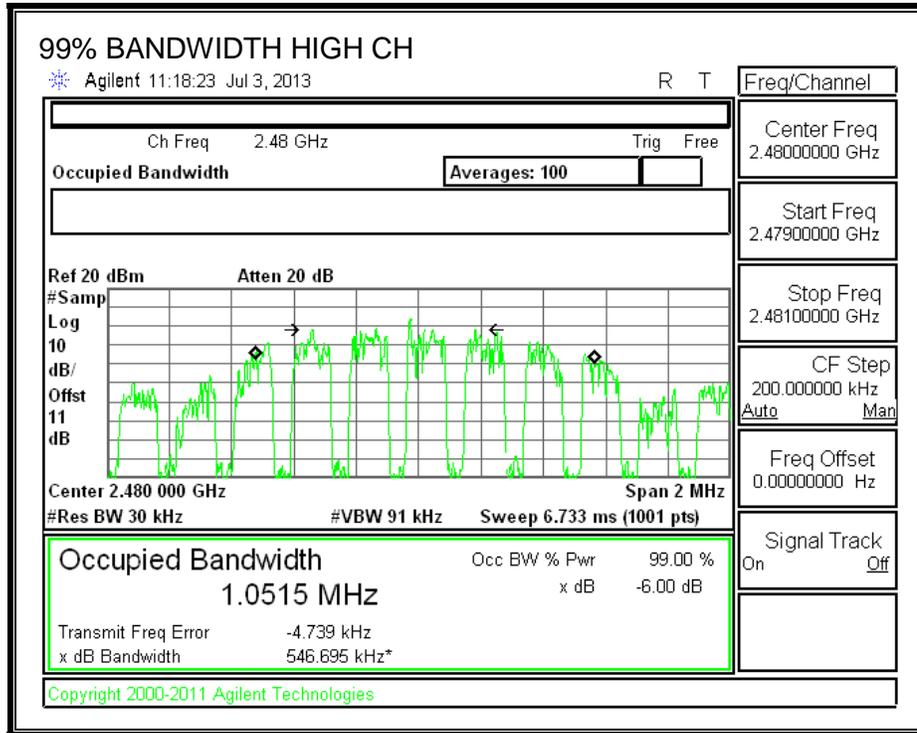

7.3. OUTPUT POWER

LIMITS

FCC §15.247 (b)

IC RSS-210 A8.4

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.


TEST PROCEDURE


Peak power is measured using KDB558074 April 9, 2013 under section 9.1.1 utilizing spectrum analyzer.


RESULTS

Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	7.220	30	-22.780
Middle	2440	8.420	30	-21.580
High	2480	6.570	30	-23.430

OUTPUT POWER

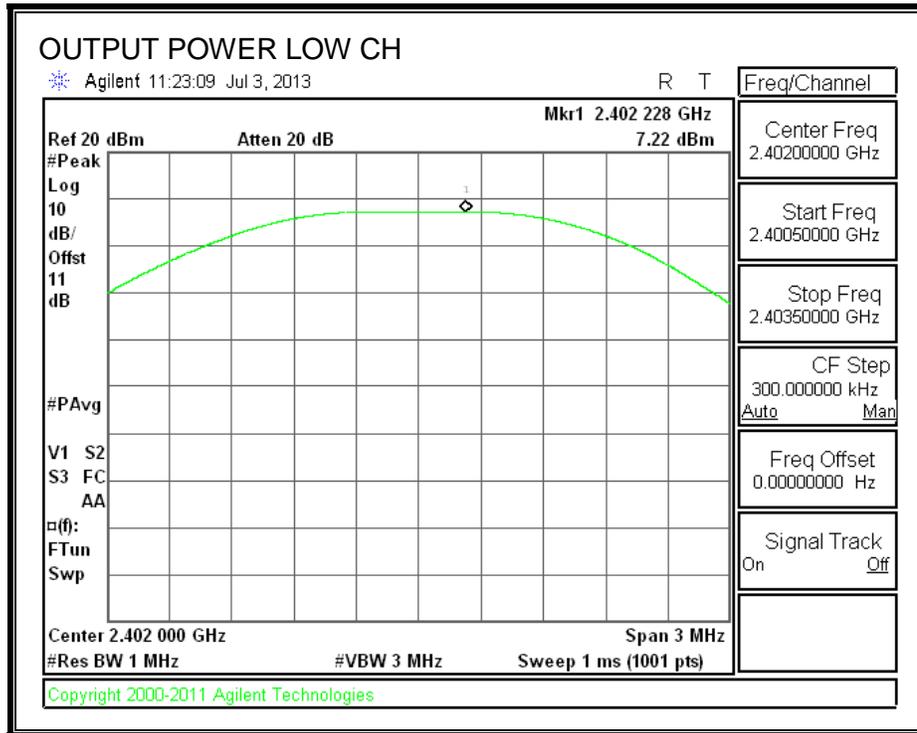

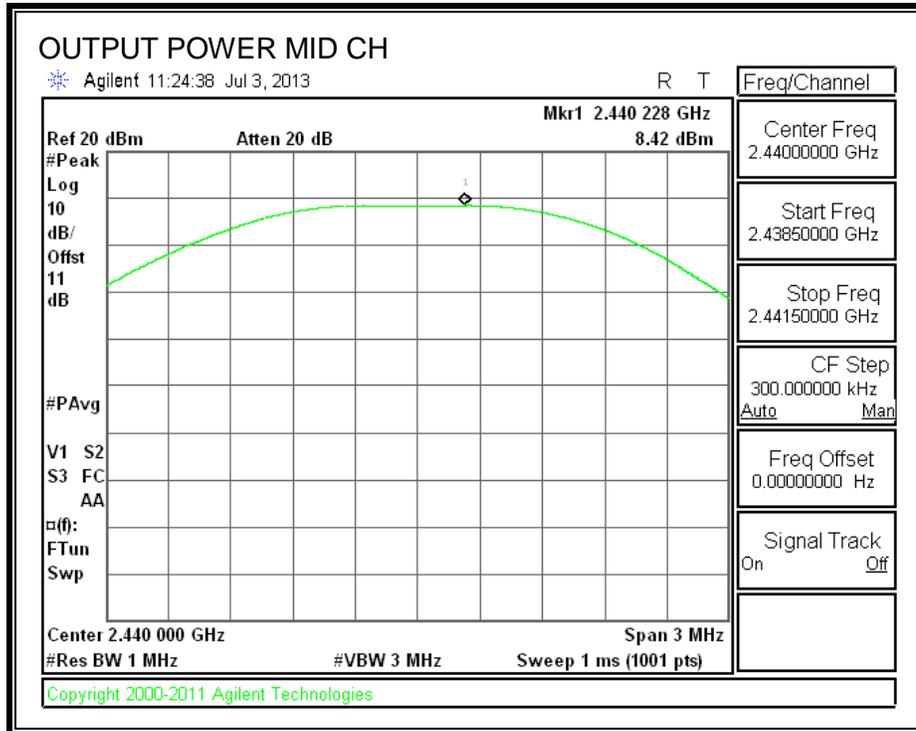

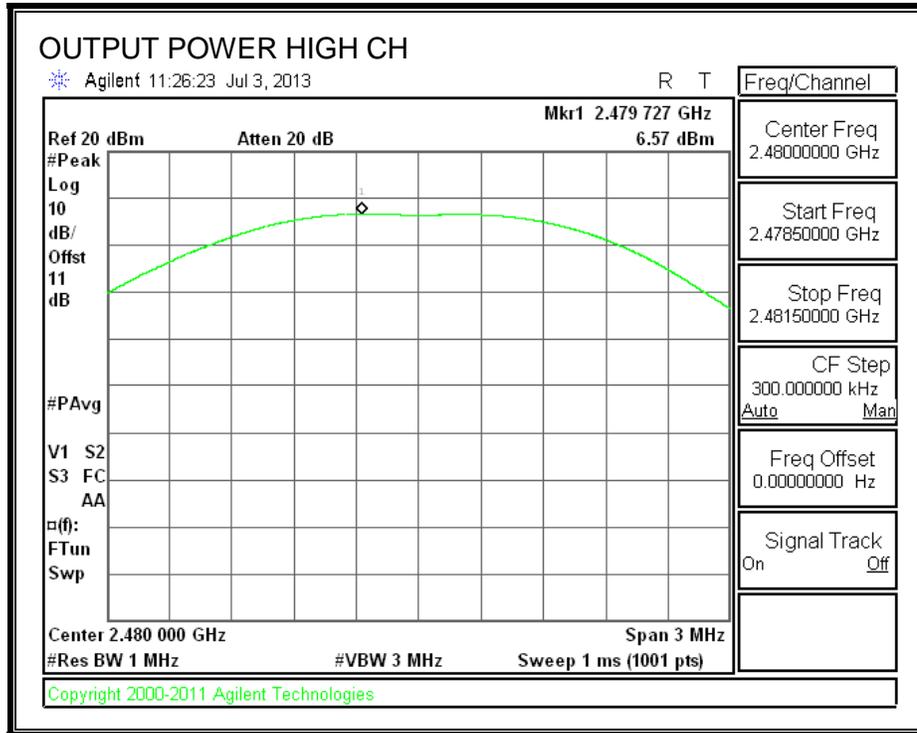

7.4. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	AV power (dBm)
Low	2402	6.19
Middle	2440	7.79
High	2480	6.7

7.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

IC RSS-210 A8.2 (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


TEST PROCEDURE


Power Spectral Density was performed utilizing the “Method PKPSD (Peak PSD)” under KDB558074, April 9, 2013


RESULTS

Channel	Frequency (MHz)	PSD (dBm)	Limit (dBm)	Margin (dB)
Low	2402	-6.83	8	-14.83
Middle	2440	-5.61	8	-13.61
High	2480	-7.46	8	-15.46

POWER SPECTRAL DENSITY

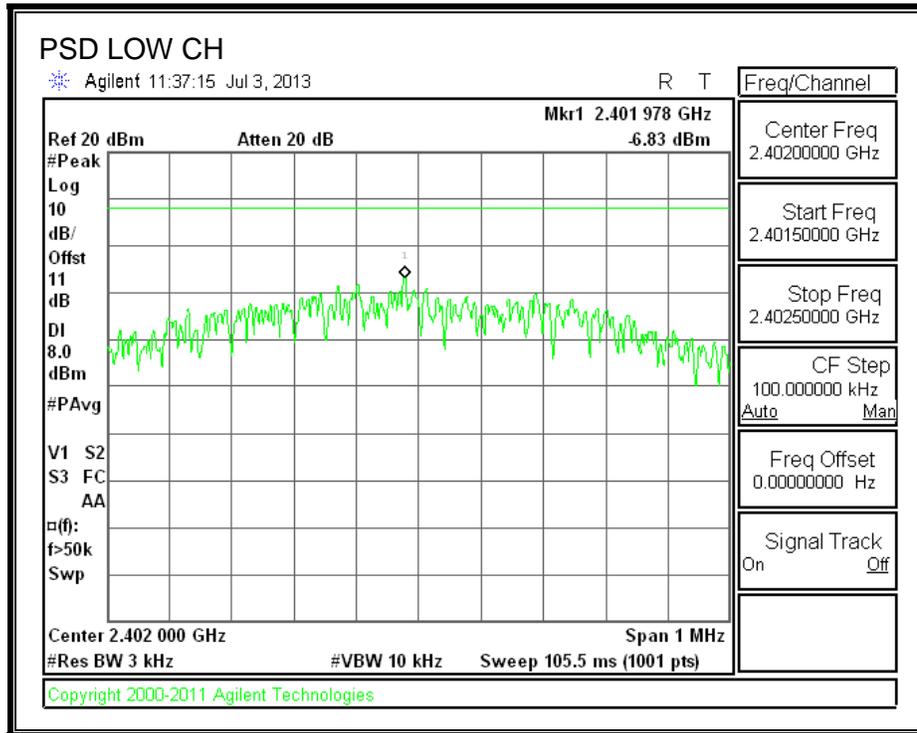

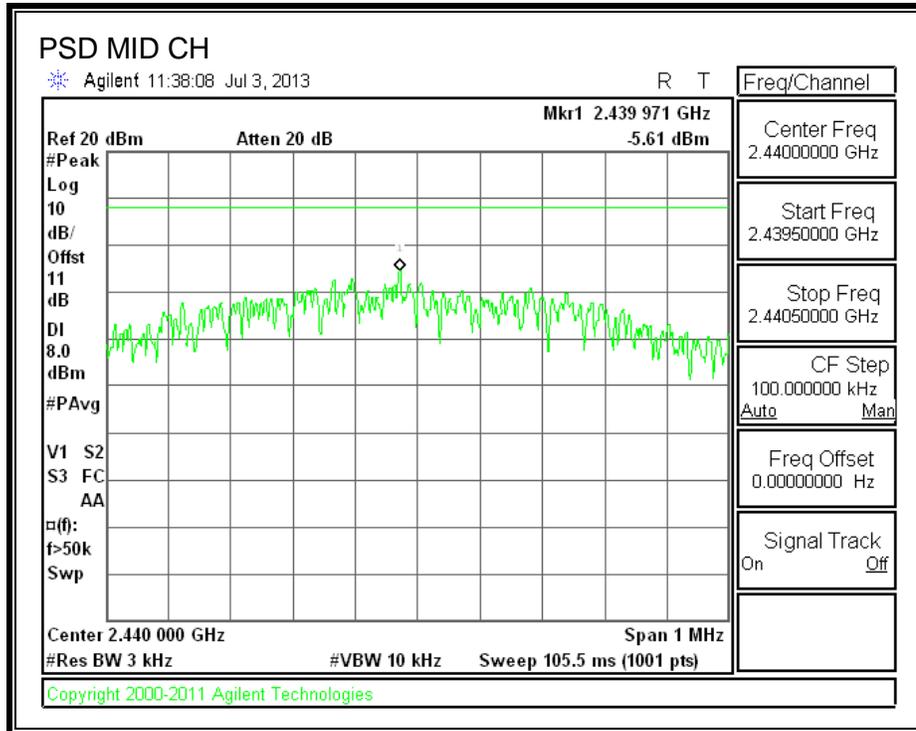

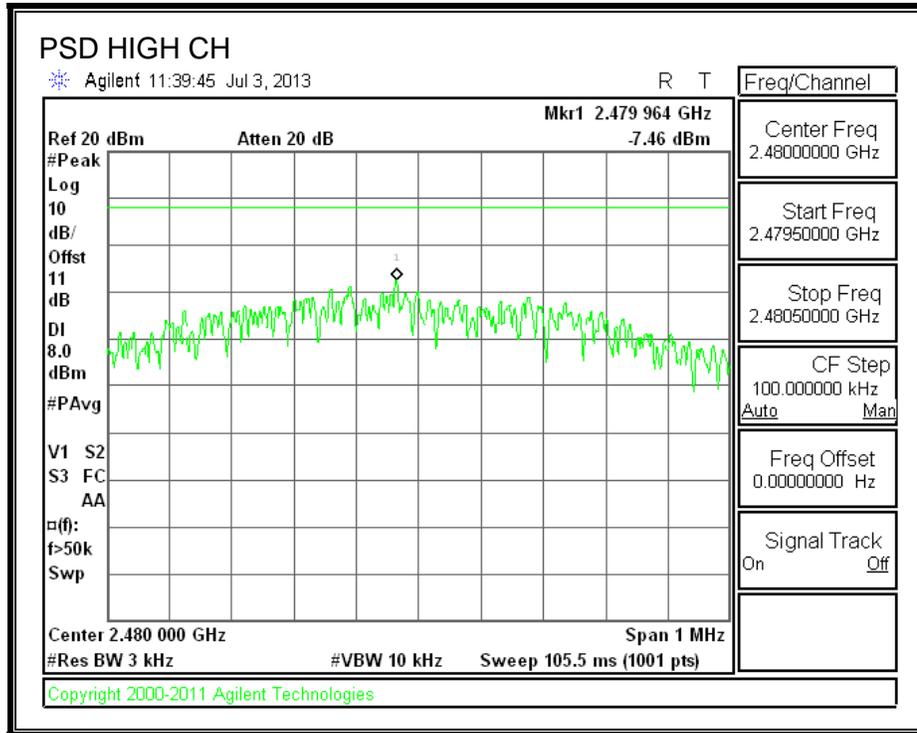

7.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


RESULTS


SPURIOUS EMISSIONS, LOW CHANNEL

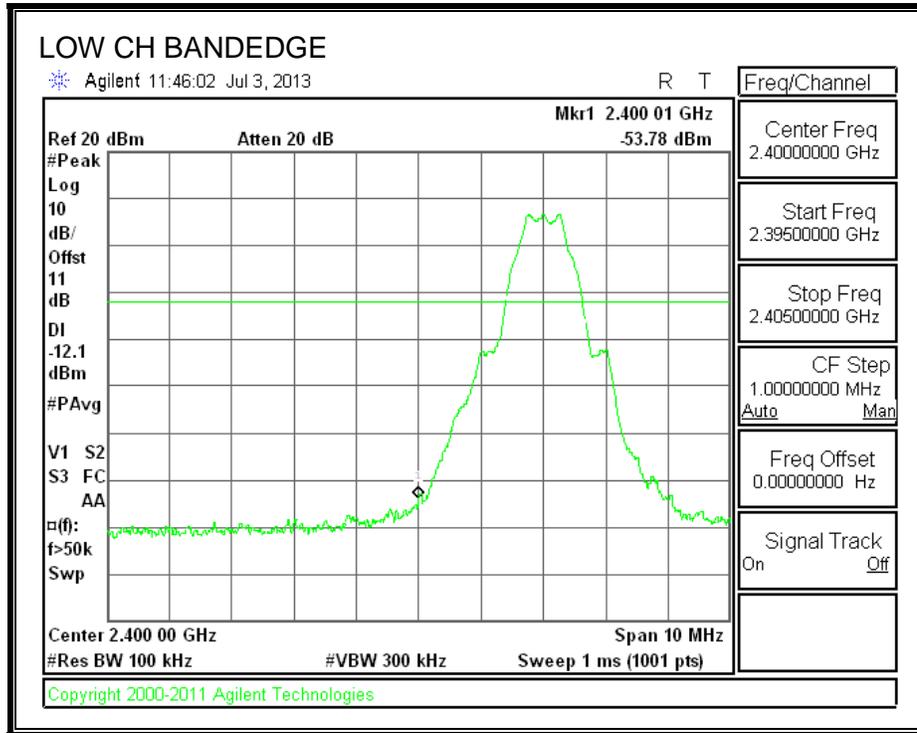

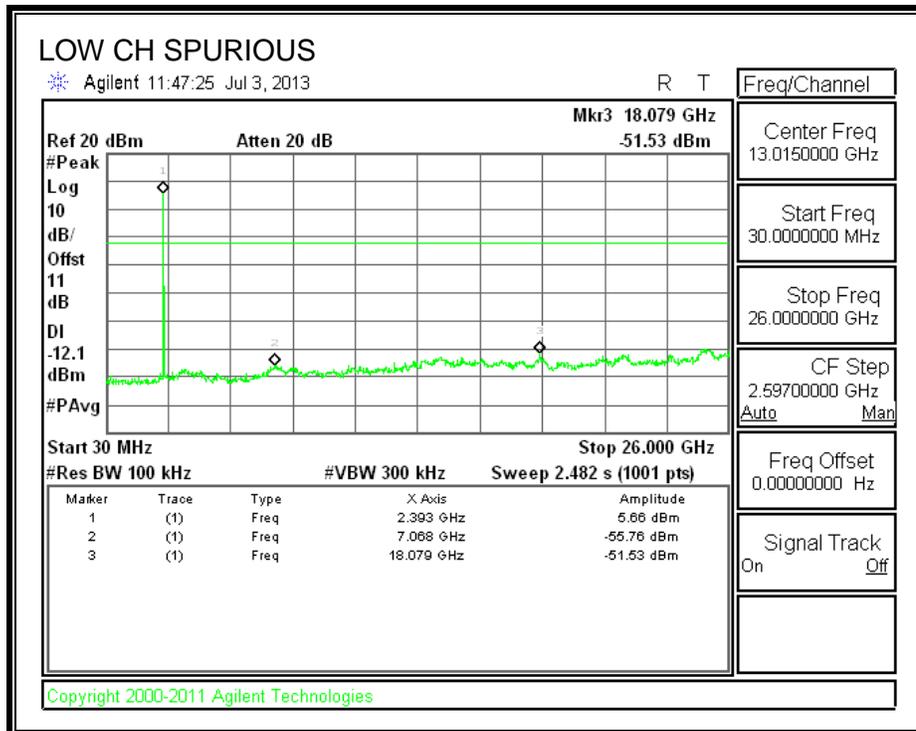



SPURIOUS EMISSIONS, MID CHANNEL

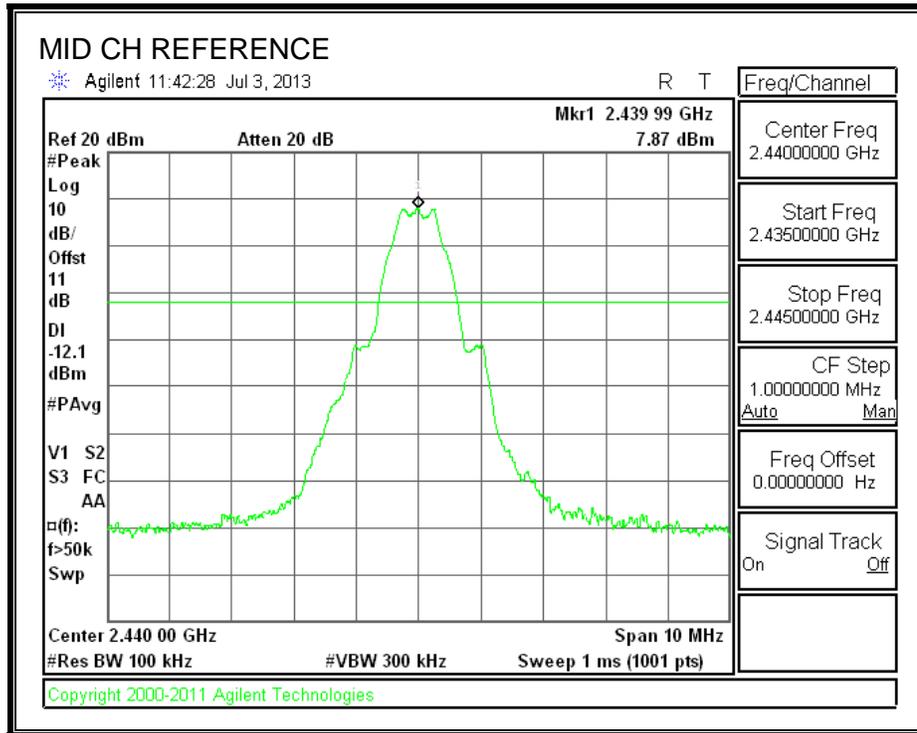

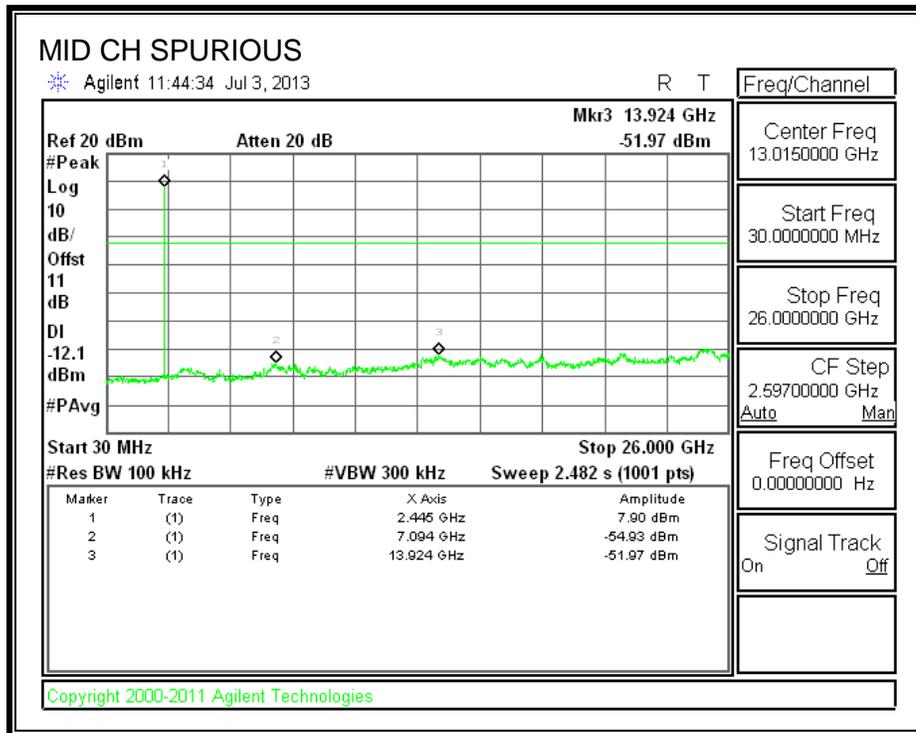

SPURIOUS EMISSIONS, HIGH CHANNEL

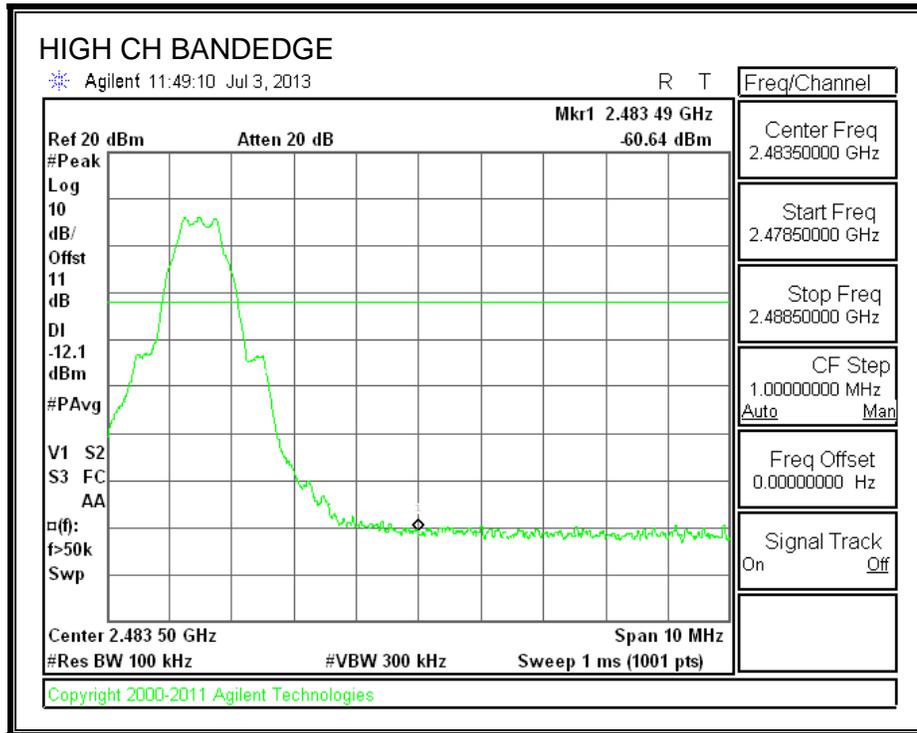

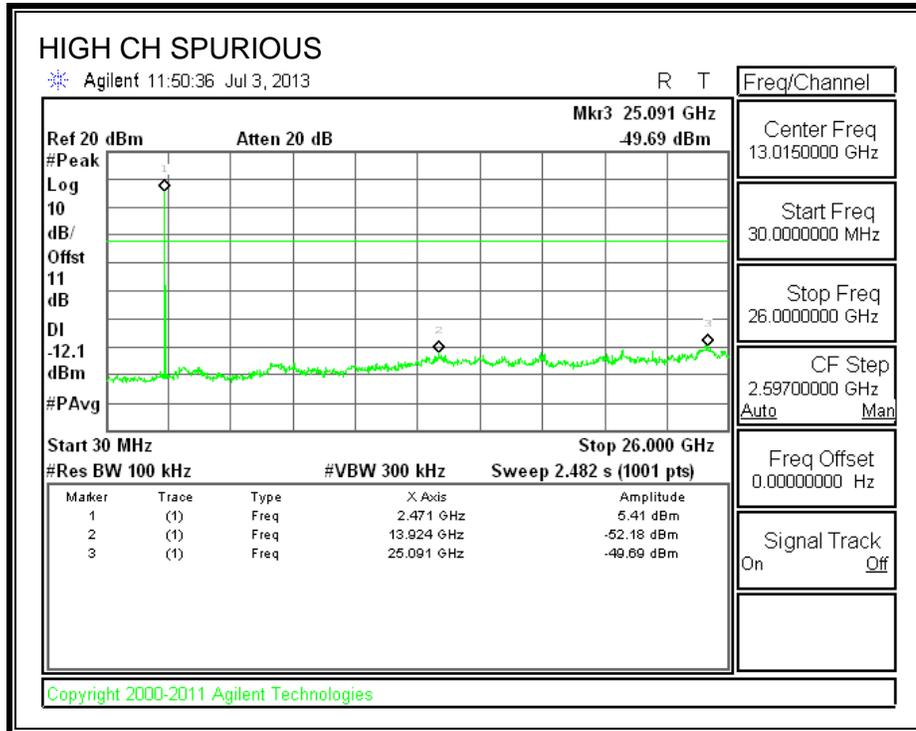

8. RADIATED TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

8.2. TRANSMITTER ABOVE 1 GHz


8.3. TX ABOVE 1 GHz FOR BLUETOOTH LOW ENERGY MODE IN THE 2.4 GHz BAND


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

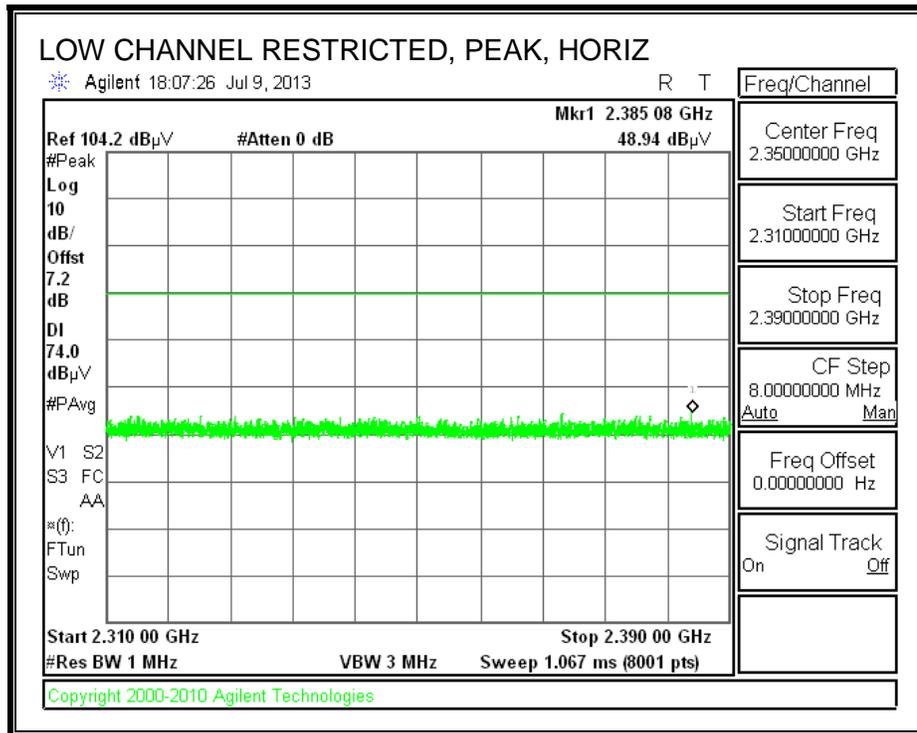

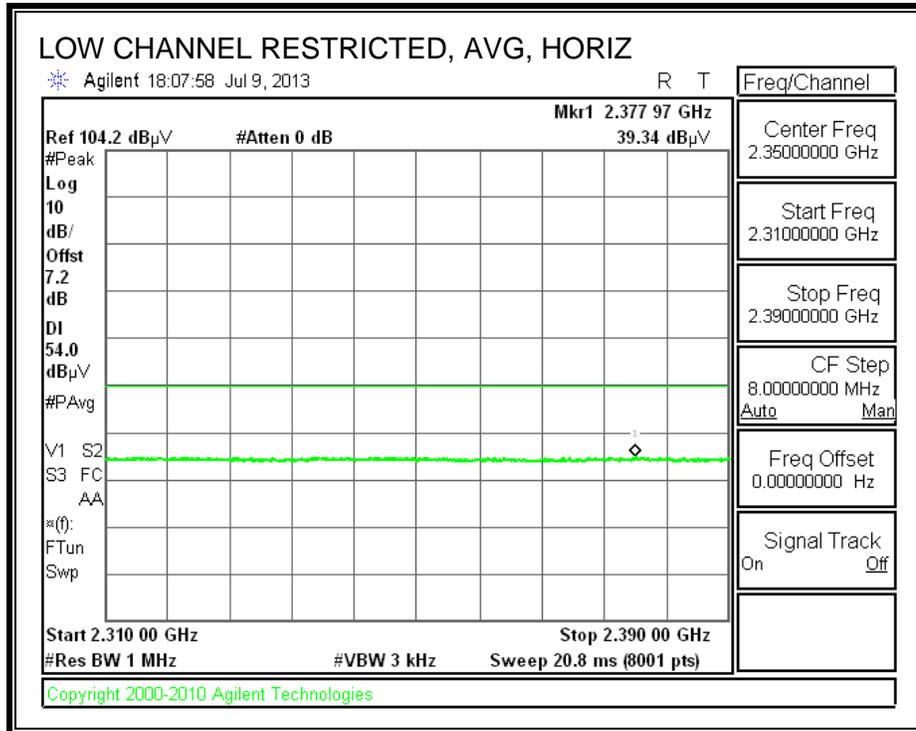



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

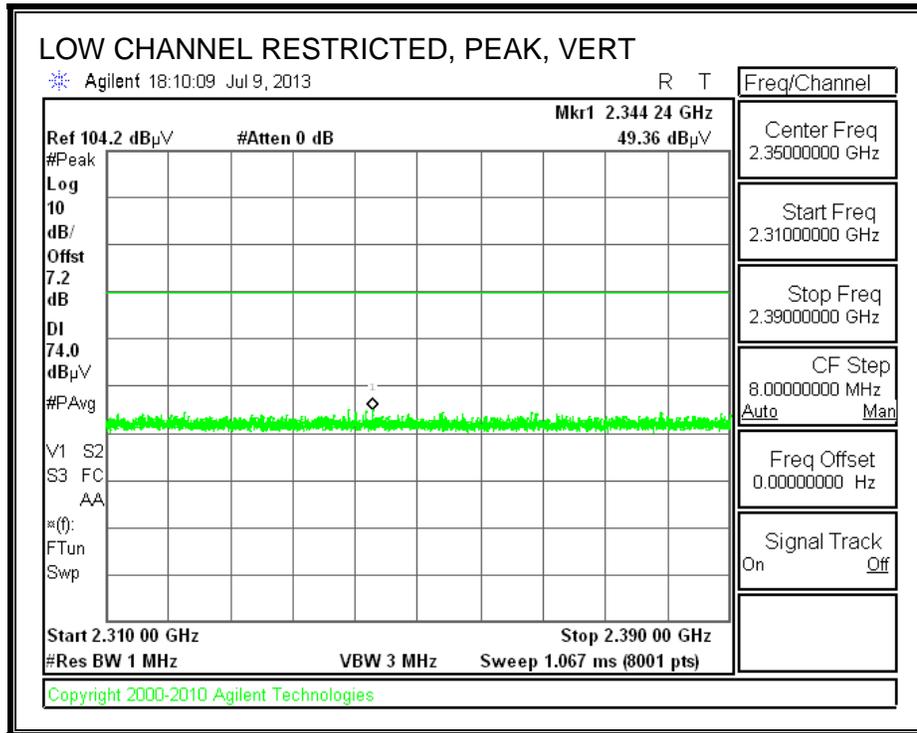

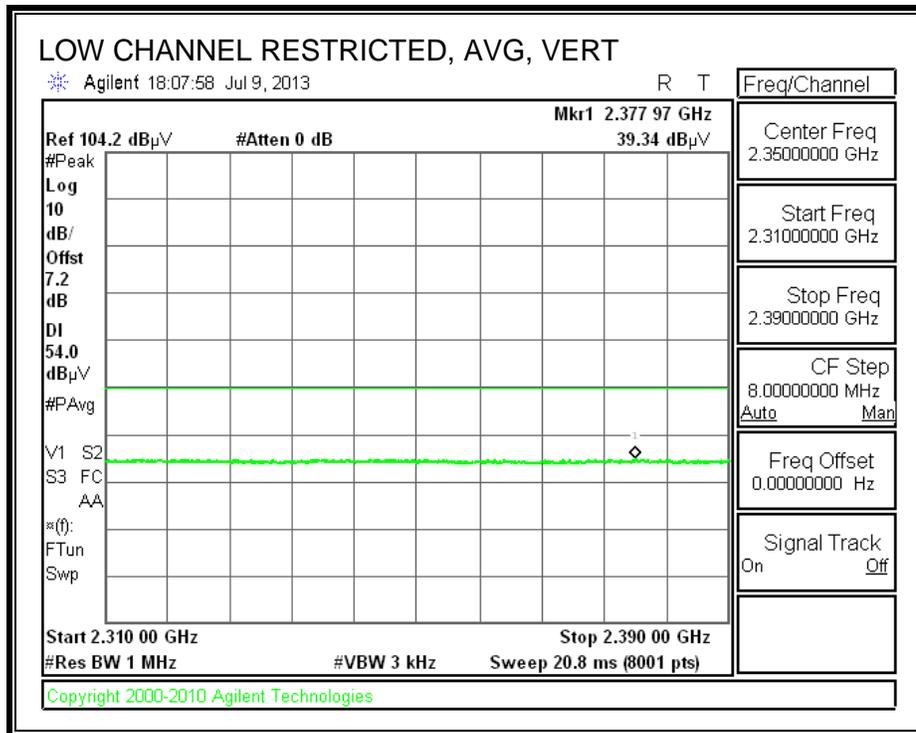



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

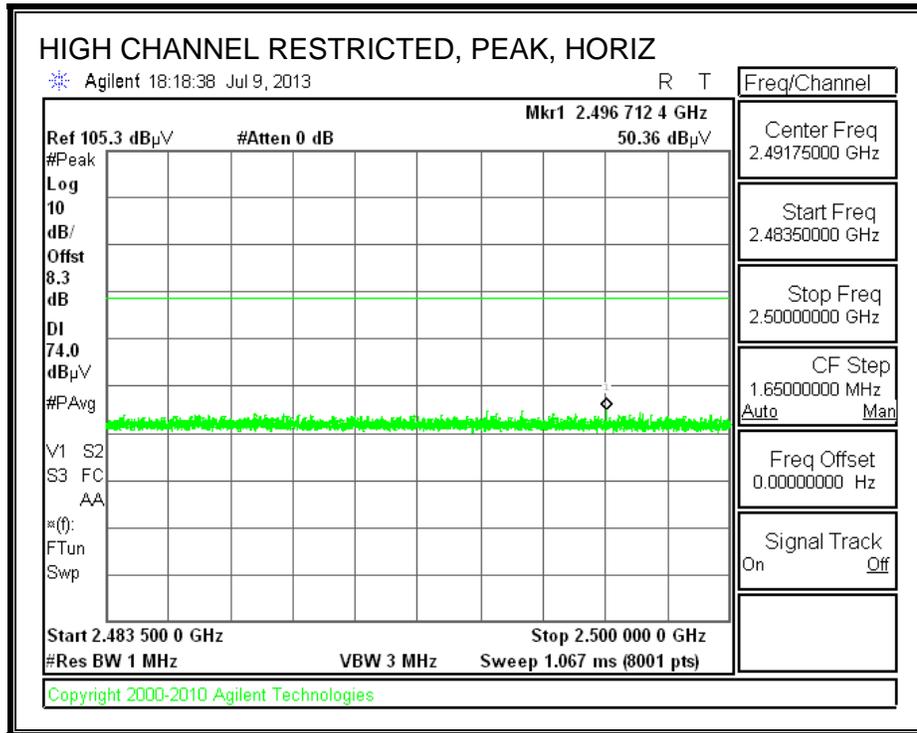

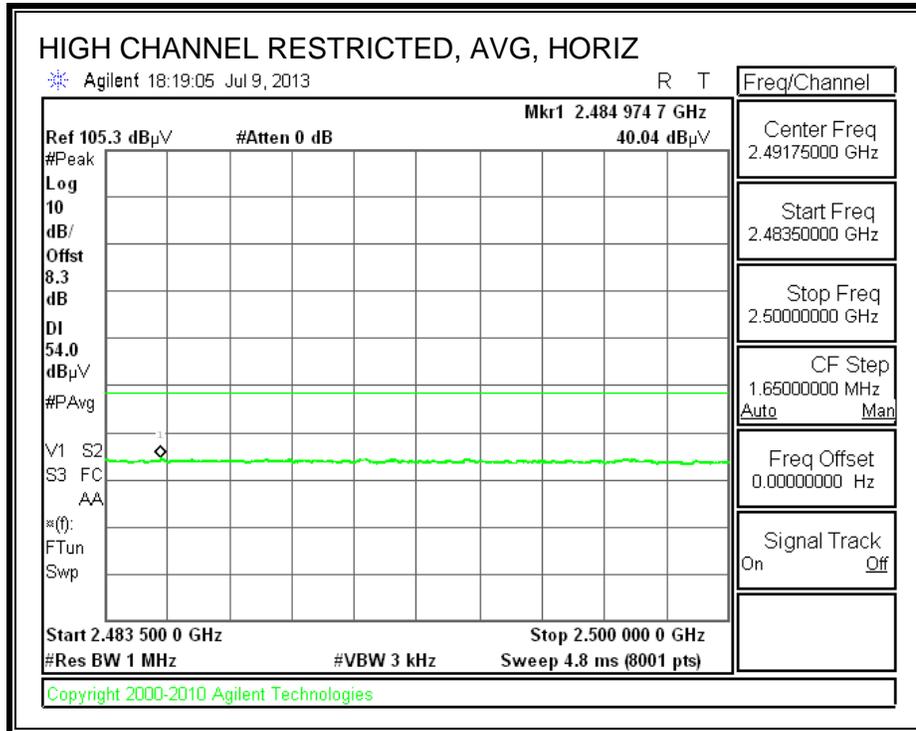


RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

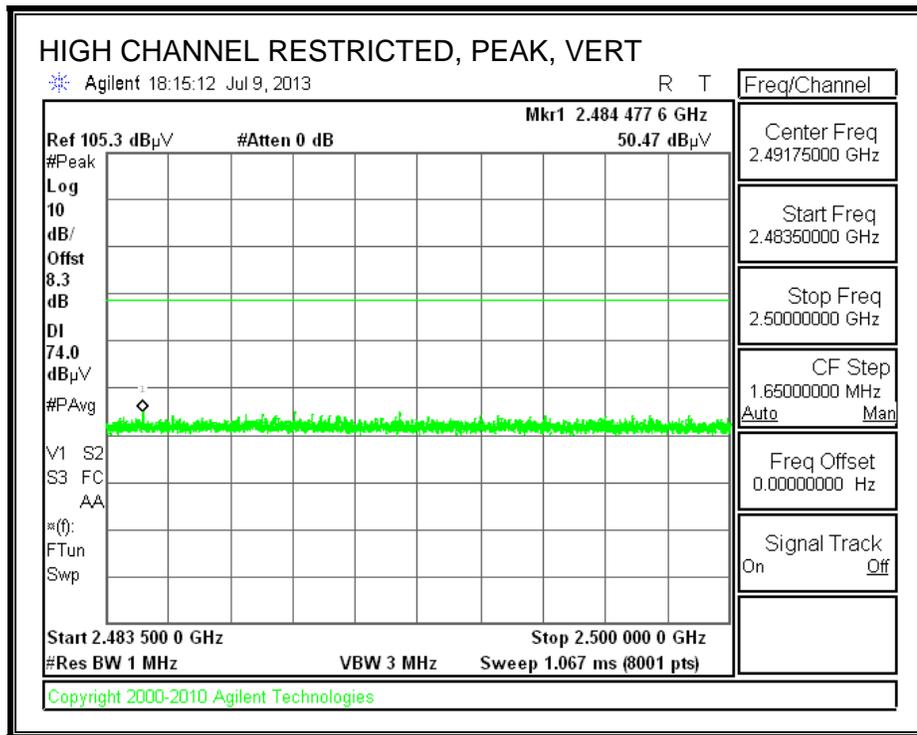

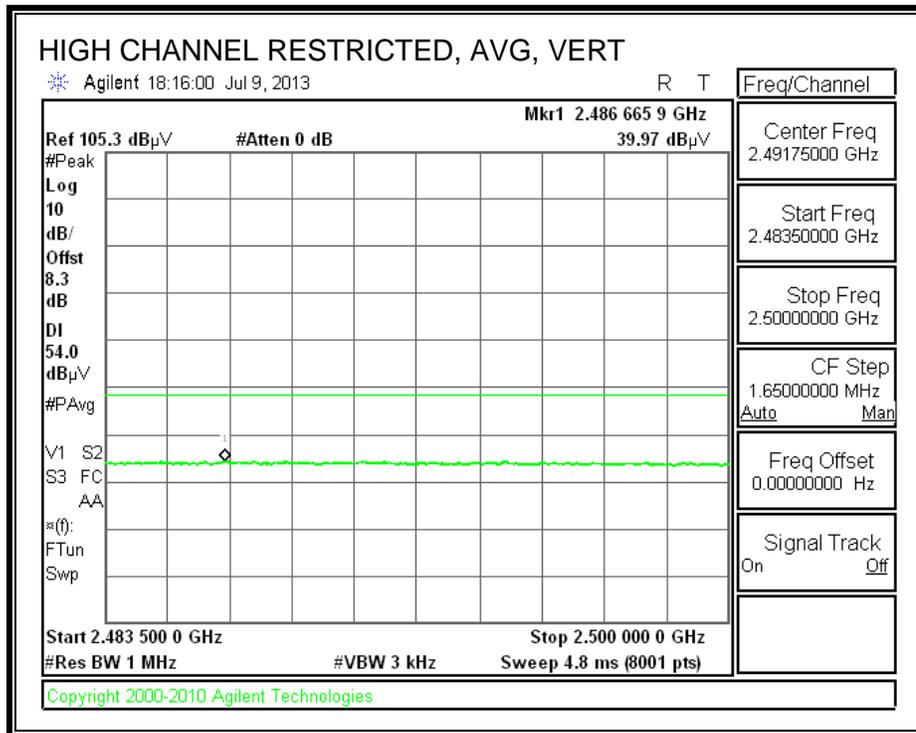


HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL
 HORIZONTAL

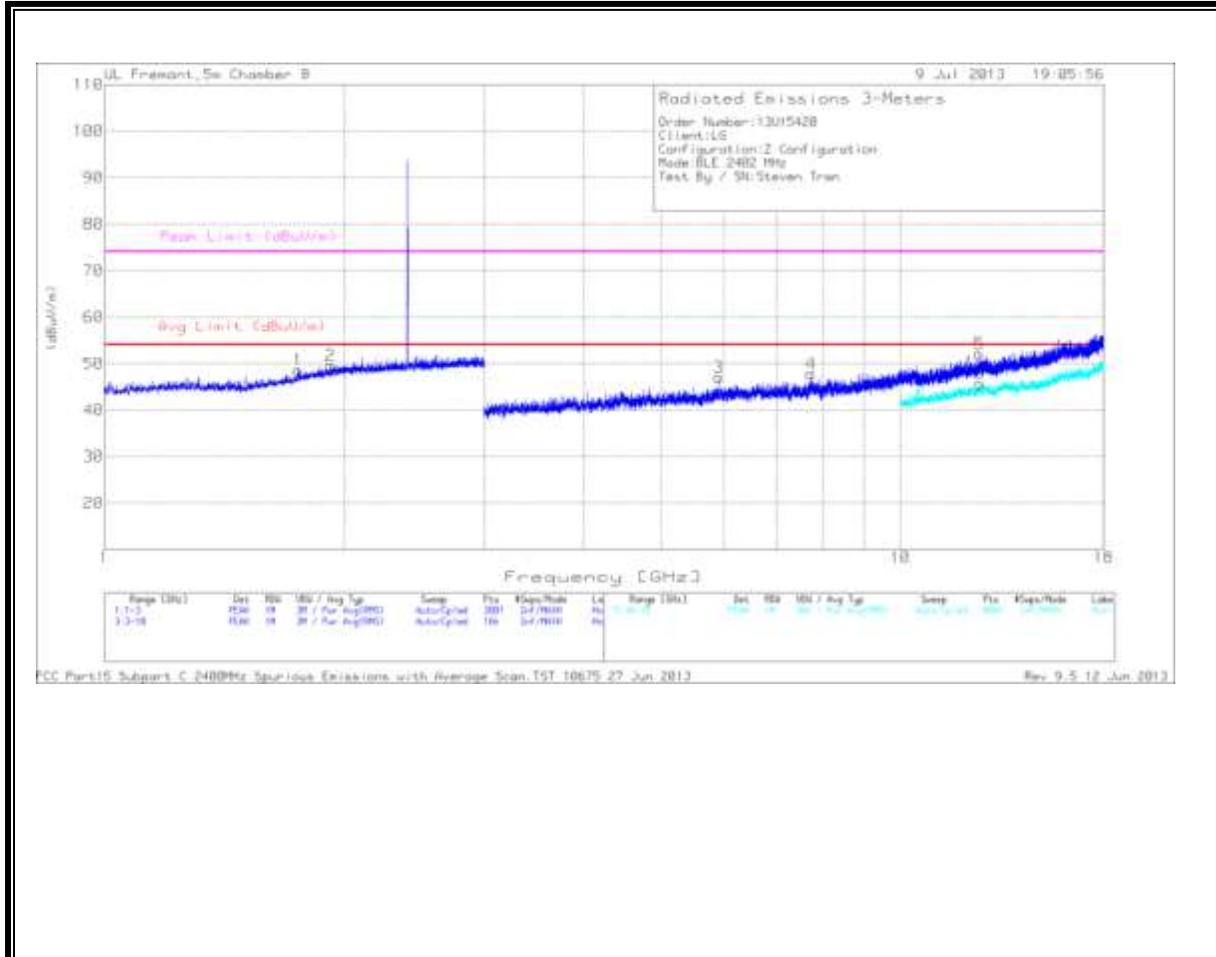

VERTICAL

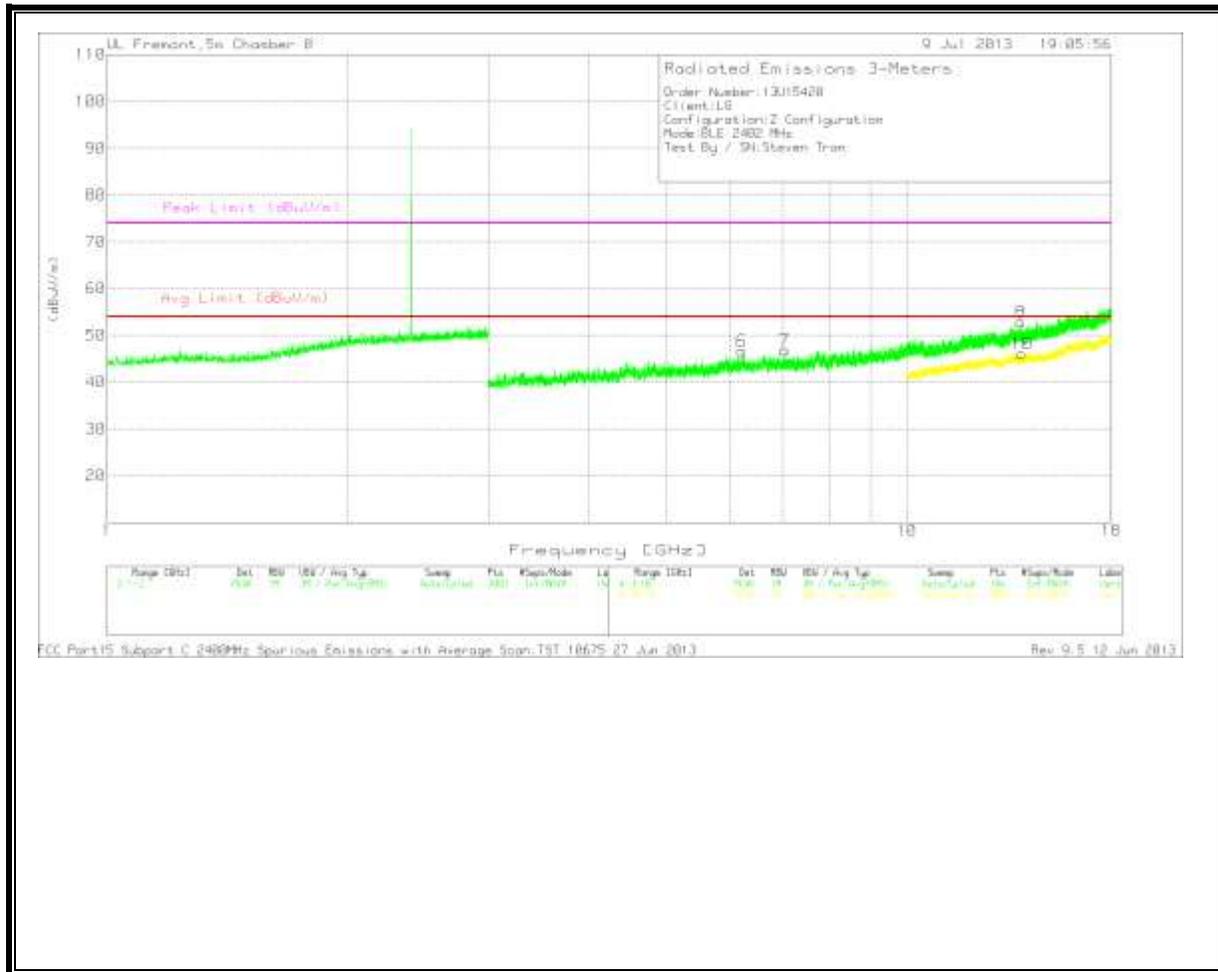


LOW CHANNEL DATA


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1.751	42.84	PK	30.1	-24.3	48.64	53.97	-5.33	74	-25.36	0-360	100	H
1.922	42.37	PK	31.3	-24.1	49.57	53.97	-4.4	74	-24.43	0-360	100	H
5.91	40.35	PK	35.6	-28.9	47.05	53.97	-6.92	74	-26.95	0-360	100	H
7.723	37.11	PK	36.2	-25.5	47.81	53.97	-6.16	74	-26.19	0-360	100	H
12.564	35.14	PK	39.2	-22.3	52.04	53.97	-1.93	74	-21.96	0-360	200	H
6.218	39.25	PK	36	-28.6	46.65	53.97	-7.32	74	-27.35	0-360	200	V
7.037	38.83	PK	35.9	-27.9	46.83	53.97	-7.14	74	-27.17	0-360	100	V
13.874	35.41	PK	39.2	-21.8	52.81	53.97	-1.16	74	-21.19	0-360	200	V
12.576	28.73	PK	39.2	-22.3	45.63	53.97	-8.34	74	-28.37	0-360	100	H
13.913	28.88	PK	39.2	-22	46.08	53.97	-7.89	74	-27.92	0-360	200	V

MID CHANNEL

HORIZONTAL

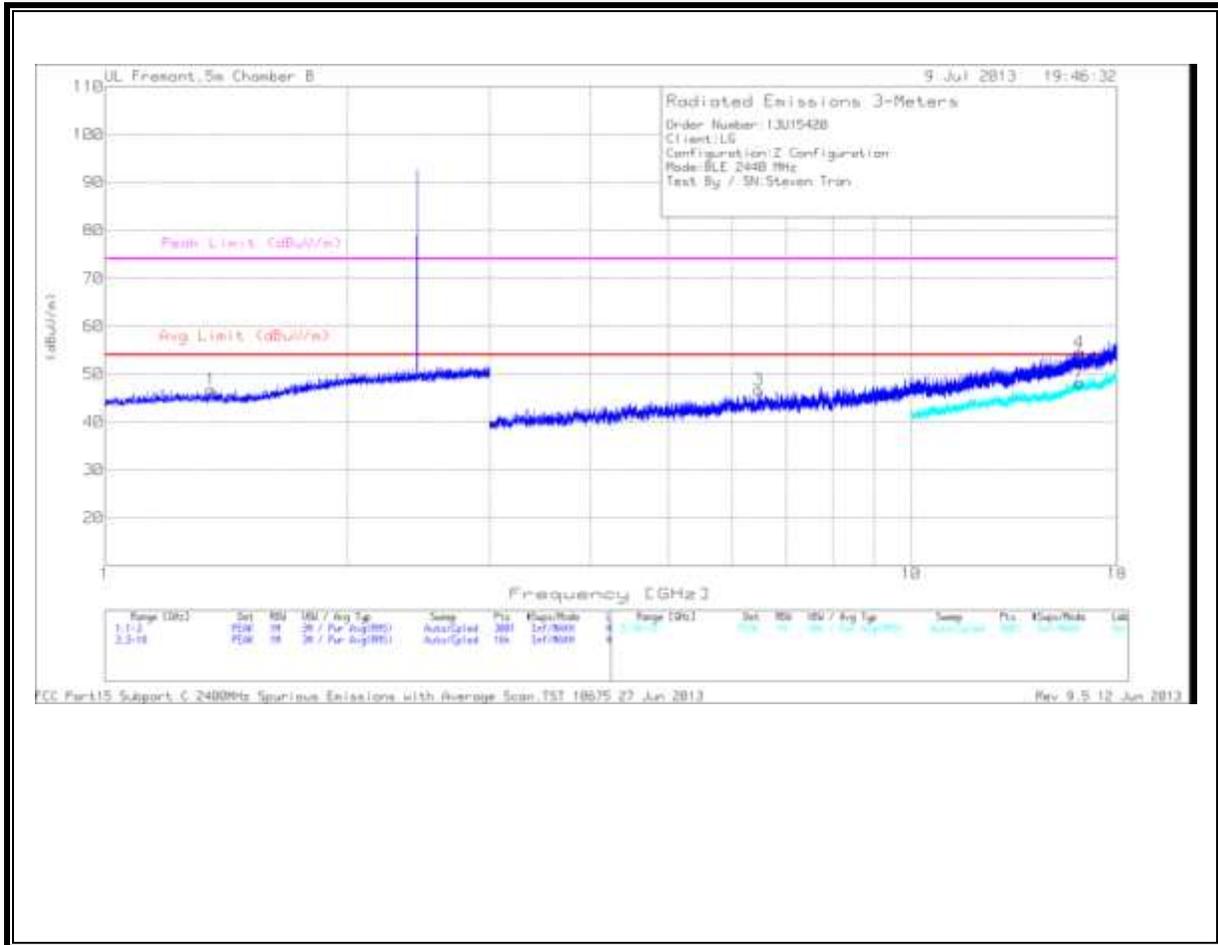


VERTICAL

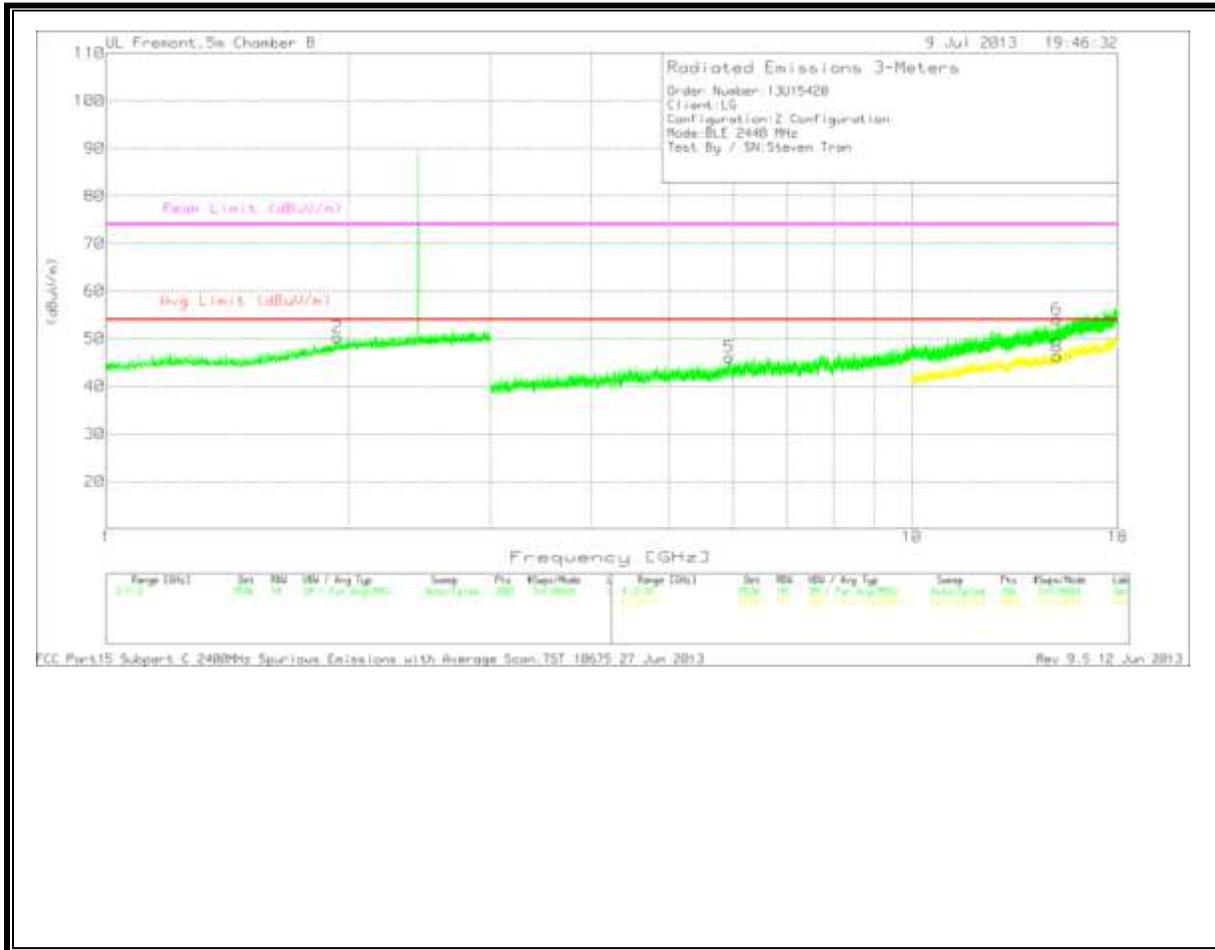


MID CHANNEL DATA

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1.353	43.32	PK	28.4	-25	46.72	53.97	-7.25	74	-27.28	0-360	100	H
1.939	42.8	PK	31.4	-23.9	50.3	53.97	-3.67	74	-23.7	0-360	100	V
6.47	39.55	PK	35.9	-28.8	46.65	53.97	-7.32	74	-27.35	0-360	200	H
5.93	38.6	PK	35.7	-28.2	46.1	53.97	-7.87	74	-27.9	0-360	200	V
16.178	27.09	PK	41.5	-20.4	48.19	53.97	-5.78	74	-25.81	0-360	100	H
15.145	27.76	PK	40.2	-21.7	46.26	53.97	-7.71	74	-27.74	0-360	200	V

HIGH CHANNEL
 HORIZONTAL

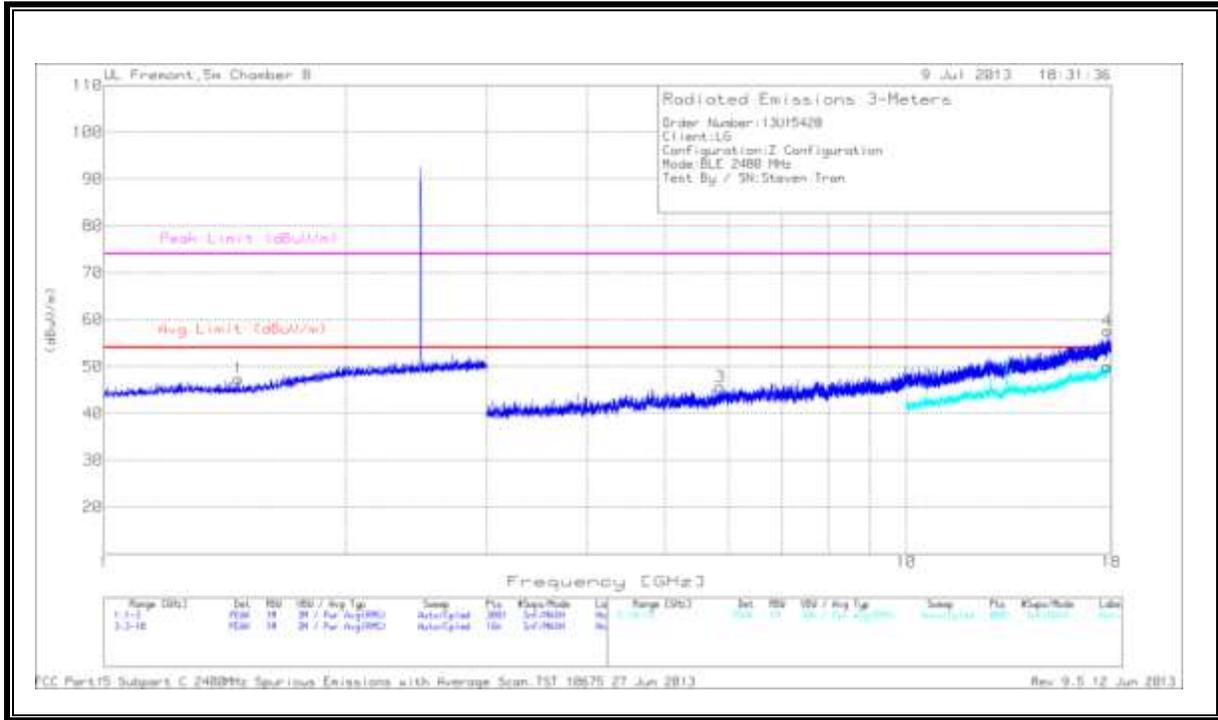

VERTICAL

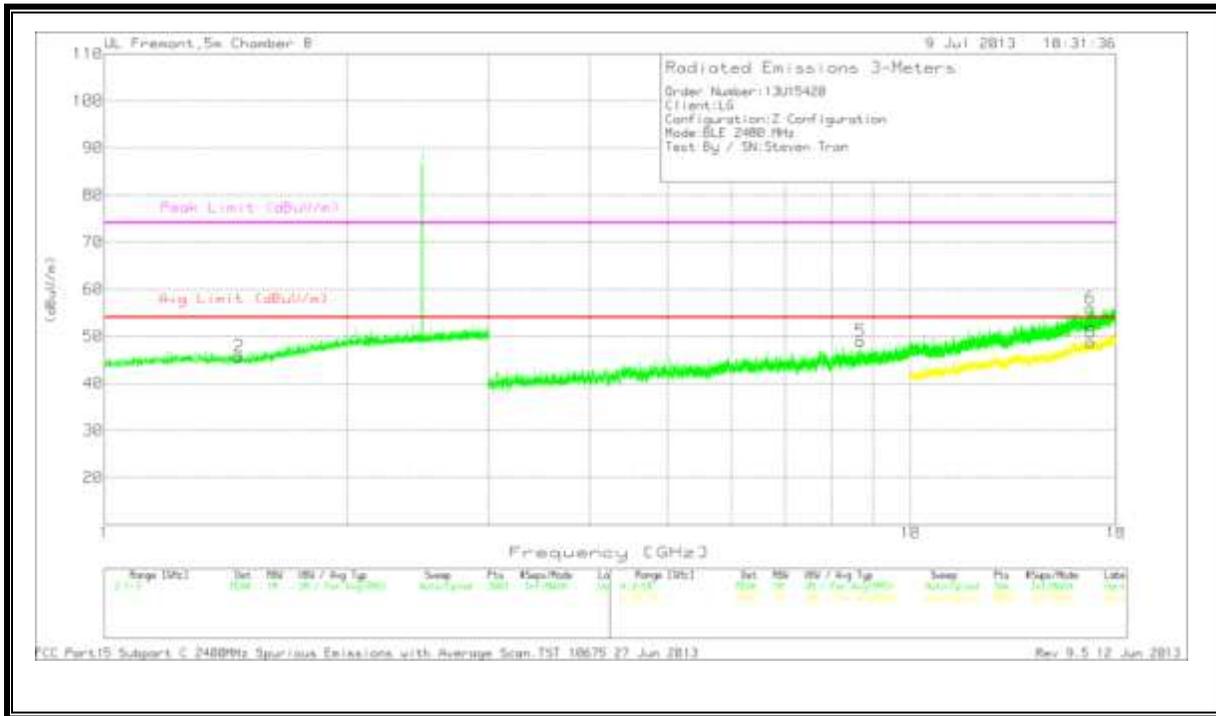



HIGH CHANNEL DATA

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1.471	43.76	PK	28.2	-24.6	47.36	53.97	-6.61	74	-26.64	0-360	100	H
1.471	42.16	PK	28.2	-24.6	45.76	53.97	-8.21	74	-28.24	0-360	100	V
5.867	39.94	PK	35.5	-29.8	45.64	53.97	-8.33	74	-28.36	0-360	100	H
8.679	38.46	PK	36.3	-25.8	48.96	53.97	-5.01	74	-25.04	0-360	200	V
17.804	26.95	PK	42.2	-19.1	50.05	53.97	-3.92	74	-23.95	0-360	100	H
16.756	27.23	PK	41.6	-20.1	48.73	53.97	-5.24	74	-25.27	0-360	200	V

8.4. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

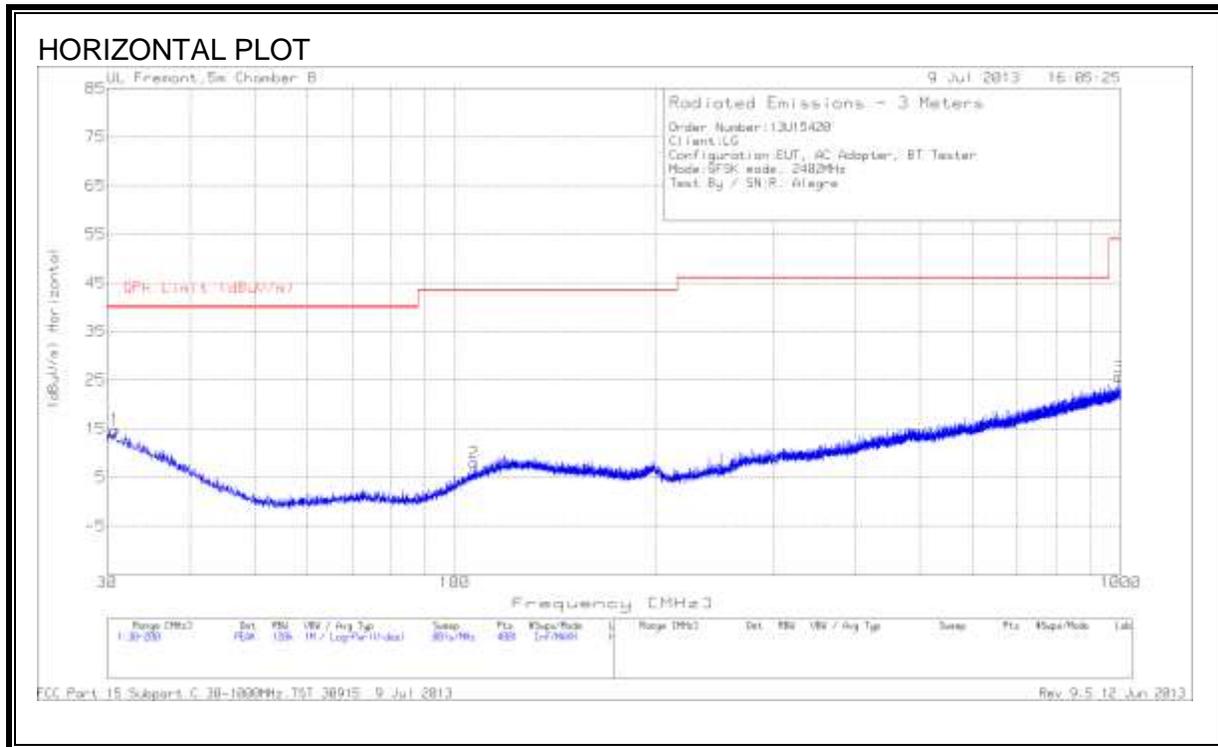

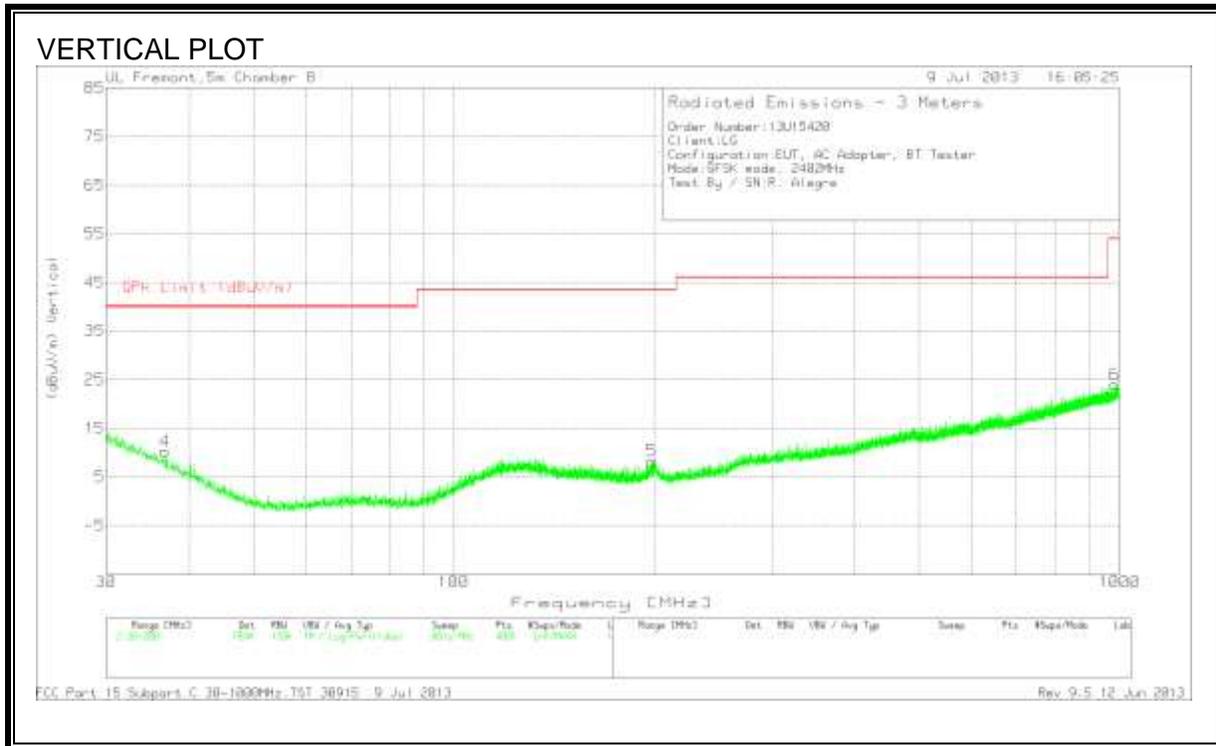

Frequency (MHz)	Meter Reading (dBuV)	Det	AF T243 (dB/m)	Amp/Cb/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
30.85	23.17	PK	20.4	-28.8	14.77	40	-25.23	0-360	300	H
106.925	24	PK	12	-28	8	43.52	-35.52	0-360	400	H
36.8	23.13	PK	15.9	-28.8	10.23	40	-29.77	0-360	100	V
198.3	23.07	PK	12.2	-27	8.27	43.52	-35.25	0-360	100	V
994.5	24.7	PK	23.3	-22.4	25.6	53.97	-28.37	0-360	400	H
983.9	23.4	PK	23.1	-22.5	24	53.97	-29.97	0-360	300	V

PK - Peak detector

FCC Part 15 Subpart C 30-1000MHz.TST 30915 9 Jul 2013 Rev 9.5 12 Jun 2013

9. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

ANSI C63.4

RESULTS


6 WORST EMISSIONS

Project No:13U15420
 Client Name:LG
 Model/Device:M20_M30/ BT mode
 Test Volt/Freq:120V/60Hz
 Test By:Steven Tran

Test Frequency	Meter Reading	Detector	T24 IL L1.TXT (dB)	LC Cables 1&3.TXT (dB)	dB(uVolts)	CISPR 11/22 Class B Quasi-peak	Margin	CISPR 11/22 Class B Average	Margin
Line-L1 .15 - 30MHz									
0.4965	48.52	PK	0.1	0	48.62	56.1	-7.48	-	-
0.4965	37.59	Av	0.1	0	37.69	-	-	46.1	-8.41
0.8925	46.99	PK	0.1	0	47.09	56	-8.91	-	-
0.8925	37.42	Av	0.1	0	37.52	-	-	46	-8.48
1.878	46.28	PK	0.1	0.1	46.48	56	-9.52	-	-
1.878	35.08	Av	0.1	0.1	35.28	-	-	46	-10.72
2.922	42.6	PK	0.1	0.1	42.8	56	-13.2	-	-
2.922	27.87	Av	0.1	0.1	28.07	-	-	46	-17.93
3.606	43.69	PK	0.2	0.1	43.99	56	-12.01	-	-
3.606	26.51	Av	0.2	0.1	26.81	-	-	46	-19.19
6.378	41.4	PK	0.1	0.1	41.6	60	-18.4	-	-
6.378	23.82	Av	0.1	0.1	24.02	-	-	50	-25.98
18.0105	38.14	PK	0.2	0.2	38.54	60	-21.46	-	-
18.0105	20.82	Av	0.2	0.2	21.22	-	-	50	-28.78
Line-L2 .15 - 30MHz									
0.708	45.06	PK	0.1	0	45.16	56	-10.84	-	-
0.708	32.04	Av	0.1	0	32.14	-	-	46	-13.86
1.788	44.05	PK	0.1	0.1	44.25	56	-11.75	-	-
1.788	27.61	Av	0.1	0.1	27.81	-	-	46	-18.19
2.868	41.36	PK	0.1	0.1	41.56	56	-14.44	-	-
2.868	25.53	Av	0.1	0.1	25.73	-	-	46	-20.27
3.885	41.44	PK	0.1	0.1	41.64	56	-14.36	-	-
3.885	25.92	Av	0.1	0.1	26.12	-	-	46	-19.88
6.324	40.06	PK	0.1	0.1	40.26	60	-19.74	-	-
6.324	23.57	Av	0.1	0.1	23.77	-	-	50	-26.23
17.5335	39.76	PK	0.2	0.2	40.16	60	-19.84	-	-
17.5335	23.21	Av	0.2	0.2	23.61	-	-	50	-26.39

PK - Peak detector
 Av - Average detector

LINE 1 RESULTS

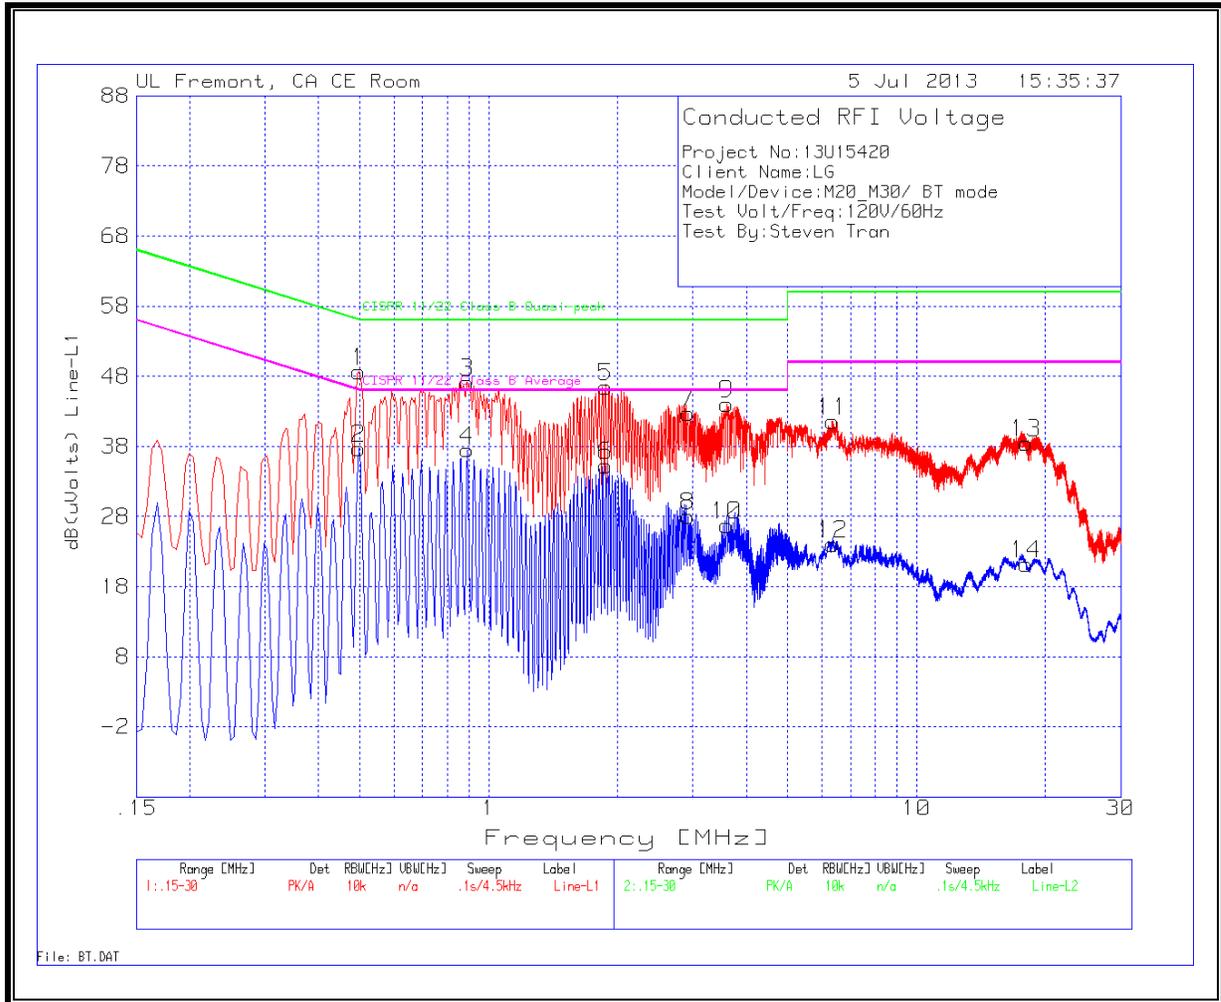

LINE 2 RESULTS

