



# PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA  
Tel. 410.290.6652 / Fax 410.290.6654  
http://www.pctestlab.com



## MEASUREMENT REPORT FCC Part 15.407 UNII 802.11a/n/ac

**Applicant Name:**  
LG Electronics MobileComm U.S.A  
1000 Sylvan Avenue  
Englewood Cliffs, NJ 07632  
United States

**Date of Testing:**  
5/06 - 5/28/2014  
**Test Site/Location:**  
PCTEST Lab, Columbia, MD, USA  
**Test Report Serial No.:**  
0Y1405070946.ZNF

<b>FCC ID:</b>	<b>ZNFD851</b>
<b>APPLICANT:</b>	<b>LG Electronics MobileComm U.S.A</b>

**Application Type:** Class II Permissive Change  
**Model(s):** LG-D851, LGD851, D851  
**EUT Type:** Portable Handset  
**FCC Classification:** Unlicensed National Information Infrastructure (UNII)  
**FCC Rule Part(s):** Part 15.407  
**Test Procedure(s):** KDB 789033 v01r03, KDB 644545 v01r02, KDB 648474 D03 v01r02  
**Class II Permissive Change:** Please see FCC change document  
**Original Grant Date:** 5/19/2014

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 789033 v01r03 and KDB 644545 v01r02. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

  
Randy Ortanez  
President



<b>FCC ID:</b> ZNFD851		<b>FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1405070946.ZNF	<b>Test Dates:</b> 5/06 - 5/28/2014	<b>EUT Type:</b> Portable Handset	Page 1 of 45	

# TABLE OF CONTENTS

FCC PART 15.407 MEASUREMENT REPORT .....		3
1.0 INTRODUCTION.....		4
1.1 SCOPE.....		4
1.2 PCTEST TEST LOCATION.....		4
2.0 PRODUCT INFORMATION .....		5
2.1 EQUIPMENT DESCRIPTION.....		5
2.2 DEVICE CAPABILITIES.....		5
2.3 TEST CONFIGURATION.....		5
2.4 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS.....		5
2.5 LABELING REQUIREMENTS.....		5
3.0 DESCRIPTION OF TEST .....		6
3.1 EVALUATION PROCEDURE.....		6
3.2 RADIATED EMISSIONS .....		6
4.0 ANTENNA REQUIREMENTS.....		7
5.0 EQUIPMENT CALIBRATION DATA.....		8
6.0 TEST RESULTS .....		9
6.1 SUMMARY .....		9
6.2 RADIATED SPURIOUS EMISSION MEASUREMENTS.....		10
6.3 RADIATED BAND EDGE MEASUREMENTS (20MHZ BW) .....		21
6.4 RADIATED BAND EDGE MEASUREMENTS (40MHZ BW) .....		28
6.5 RADIATED BAND EDGE MEASUREMENTS (80MHZ BW) .....		35
6.6 WCC RADIATED BAND EDGE MEASUREMENTS .....		42
7.0 CONCLUSION .....		45

<b>FCC ID:</b> ZNFD851		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1405070946.ZNF	<b>Test Dates:</b> 5/06 - 5/28/2014	<b>EUT Type:</b> Portable Handset	Page 2 of 45	



# MEASUREMENT REPORT

## FCC Part 15.407



### § 2.1033 General Information

**APPLICANT:** LG Electronics MobileComm U.S.A

**APPLICANT ADDRESS:** 1000 Sylvan Avenue  
Englewood Cliffs, NJ 07632, United States

**TEST SITE:** PCTEST ENGINEERING LABORATORY, INC.

**TEST SITE ADDRESS:** 7185 Oakland Mills Road, Columbia, MD 21046 USA

**FCC RULE PART(S):** Part 15.407

**BASE MODEL:** LG-D851

**FCC ID:** ZNFD851

**FCC CLASSIFICATION:** Unlicensed National Information Infrastructure (UNII)

**Test Device Serial No.:** WiFi Radiation     Production     Pre-Production     Engineering


**DATE(S) OF TEST:** 5/06 - 5/28/2014

**TEST REPORT S/N:** 0Y1405070946.ZNF

### Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP) Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.



<b>FCC ID:</b> ZNFD851		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1405070946.ZNF	<b>Test Dates:</b> 5/06 - 5/28/2014	<b>EUT Type:</b> Portable Handset	Page 3 of 45	

# 1.0 INTRODUCTION


## 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

## 1.2 PCTEST Test Location

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern'tl (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on February 15, 2012.

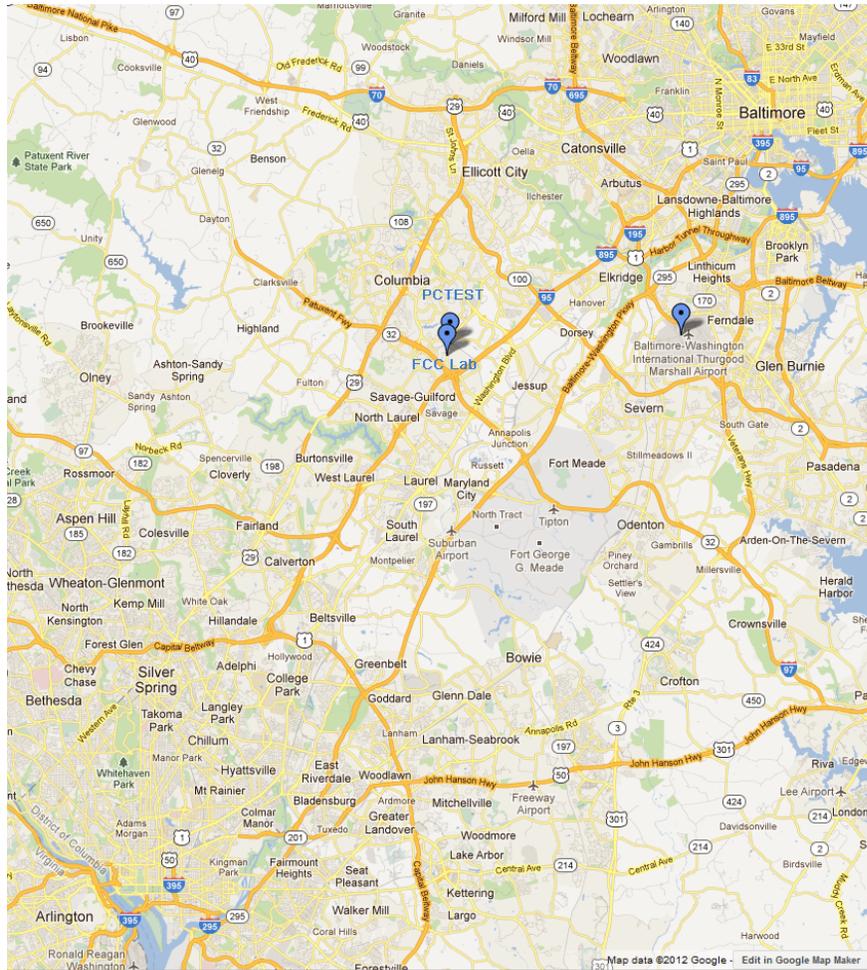

**Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area**

FCC ID: ZNFD851		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1405070946.ZNF	Test Dates: 5/06 - 5/28/2014	EUT Type: Portable Handset	Page 4 of 45	

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID: ZNFD851**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter.

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-Band LTE, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE), NFC

**Note:** 5GHz WLAN (DTS/NII) operation is possible in 20MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of KDB 789033. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

- 802.11a/n/ac 20MHz Bandwidth – 98.0 %

### 2.3 Test Configuration

The LG Portable Handset FCC ID: ZNFD851 was tested per the guidance of KDB 789033 v01r03. ANSI C63.10-2009 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2 of this test report for a description of the radiated emissions test setups, respectively. Additional emissions testing were performed per KDB 648474 D03 and the additional worst case emissions are reported herein and identified as WCC.

Per KDB 648474 D03, spurious emissions measurement data was also investigated with the wireless charging battery cover. The handset was placed on the representative charging pad under normal conditions and in a simulated call configuration. Only worst case emissions are shown in this report.

### 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

### 2.5 Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

FCC ID: ZNFD851		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1405070946.ZNF	Test Dates: 5/06 - 5/28/2014	EUT Type: Portable Handset	Page 5 of 45	

## 3.0 DESCRIPTION OF TEST

### 3.1 Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2009) and the guidance provided in KDB 789033 v01r03 were used in the measurement of **LG Portable Handset FCC ID: ZNFD851**.

**Deviation from measurement procedure.....None**

### 3.2 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Clause 5, Figure 5.7 of ANSI C63.4-2009. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An ETS Lindgren Model 2188 raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 78cm high PVC support structure is placed on top of the turntable. A 3/4" (~1.9cm) sheet of high density polyethylene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 0.8 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. For the EUT positioning, "H" is defined with the EUT lying flat on the test surface, "H2" is defined with the EUT standing up on its side, and "V" is defined with the EUT standing upright.

<b>FCC ID:</b> ZNFD851		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1405070946.ZNF	<b>Test Dates:</b> 5/06 - 5/28/2014	<b>EUT Type:</b> Portable Handset	Page 6 of 45	

## 4.0 ANTENNA REQUIREMENTS

**Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the Portable Handset are **permanently attached**.
- There are no provisions for connection to an external antenna.

**Conclusion:**

The **LG Portable Handset FCC ID: ZNFD851** unit complies with the requirement of §15.203.

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745
:	:	:	:	:	:	:	:
42	5210	56	5280	116	5580	157	5785
:	:	:	:	:	:	:	:
48	5240	64	5320	144	5720	165	5825

**Table 4-1. 802.11a / 802.11n (20MHz) Frequency / Channel Operations**

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
38	5190	54	5270	102	5510	151	5755
:	:	:	:	:	:	:	:
46	5230	62	5310	110	5550	157	5785
				:	:	:	:
				142	5710	161	5805

**Table 4-2. 802.11n (40MHz BW) Frequency / Channel Operations**

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
42	5210	58	5290	106	5530	155	5775
				138	5690		

**Table 4-3. 802.11ac (80MHz BW) Frequency / Channel Operations**

FCC ID: ZNFD851		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1405070946.ZNF	Test Dates: 5/06 - 5/28/2014	EUT Type: Portable Handset	Page 7 of 45	

## 5.0 EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	3/25/2014	Annual	3/25/2015	N/A
Agilent	8447D	Broadband Amplifier	5/31/2013	Annual	5/31/2014	2443A01900
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	6/26/2013	Annual	6/26/2014	121034
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	4/8/2014	Biennial	4/8/2016	125518
ETS Lindgren	3160-09	18-26.5 GHz Standard Gain Horn	5/30/2012	Biennial	5/30/2014	135427
ETS Lindgren	3160-10	26.5-40 GHz Standard Gain Horn	6/6/2012	Biennial	6/6/2014	130993
K & L	11SH10-6000/T18000	High Pass Filter	2/7/2014	Annual	2/7/2015	1
Mini-Circuits	VHF-3100+	High Pass Filter	1/27/2014	Annual	1/27/2015	30841
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	5/31/2013	Annual	5/31/2014	100071
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	5/31/2013	Annual	5/31/2014	100040
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	1/27/2014	Annual	1/27/2015	100342
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/28/2014	Biennial	1/28/2016	A051107

**Table 5-1. Annual Test Equipment Calibration Schedule**

**Note:**

For equipment listed above that has a calibration due date that falls within the test date range, care was taken to ensure that this equipment was utilized prior to the calibration due date.

<b>FCC ID:</b> ZNFD851		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1405070946.ZNF	<b>Test Dates:</b> 5/06 - 5/28/2014	<b>EUT Type:</b> Portable Handset		Page 8 of 45

## 6.0 TEST RESULTS

### 6.1 Summary

Company Name: LG Electronics MobileComm U.S.A  
 FCC ID: ZNFD851  
 Method/System: Unlicensed National Information Infrastructure (UNII)  
 Data Rate(s) Tested: 6, 9, 12, 18, 24, 36, 48, 54Mbps (802.11a)  
6.5/7.2, 13/14.4, 19.5/21.7, 26/28.9, 39/43.3, 52/57.8, 58.5/65, 65/72.2 (n – 20MHz)

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
<b>TRANSMITTER MODE (TX)</b>					
15.407(b.1), (2),(3)	Undesirable Emissions	< -27 dBm/MHz EIRP (5150-5350MHz, 5470-5725MHz)	RADIATED	PASS	Section 6.2
15.205, 15.407(b.1), (5), (6)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-210 table 3 limits)		PASS	Section 6.3, 6.6

**Table 6-1. Summary of Test Results**

**Notes:**

- All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.

FCC ID: ZNFD851		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1405070946.ZNF	Test Dates: 5/06 - 5/28/2014	EUT Type: Portable Handset	Page 9 of 45	

## 6.2 Radiated Spurious Emission Measurements

§15.407(b.1)(b.6) §15.205 §15.209

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle (>98%), at its maximum power control level, as defined in KDB 789033 v01r03, and at the appropriate frequencies. All channels, modes (e.g. 802.11a, 802.11n (20MHz BW), 802.11n (40MHz BW) and 802.11ac (80MHz BW)), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 6-2 per Section 15.209.***

Frequency	Field Strength [ $\mu\text{V/m}$ ]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

**Table 6-2. Radiated Limits**

### Test Procedures Used

KDB 789033 v01r03 – Section H

### Test Settings

#### Average Measurements above 1GHz (Method AD)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be  $\geq 2 \times \text{span/RBW}$ )
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

FCC ID: ZNFD851		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1405070946.ZNF	Test Dates: 5/06 - 5/28/2014	EUT Type: Portable Handset	Page 10 of 45	

**Peak Measurements above 1GHz**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

**Peak Measurements below 1GHz**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = 120kHz
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

**Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.

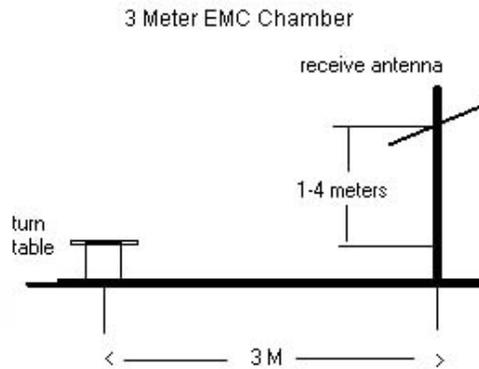

**Figure 6-1. Test Instrument & Measurement Setup**

<b>FCC ID:</b> ZNFD851		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1405070946.ZNF	<b>Test Dates:</b> 5/06 - 5/28/2014	<b>EUT Type:</b> Portable Handset	Page 11 of 45	

## Test Notes

1. All radiated spurious emissions levels were measured in a radiated test setup per the guidance of KDB 789033 v01r03 Section H.
2. All emissions that lie in the restricted bands (denoted by a \* next to the frequency) specified in §15.205 are below the limit shown in Table 6-2.
3. All spurious emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 6-11. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB $\mu$ V/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB $\mu$ V/m.
4. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
5. This unit was tested with its standard battery.
6. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
7. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.

## Sample Calculations

### Determining Spurious Emissions Levels

- Field Strength Level  $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$

### Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 6.8 was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + 10 \text{ dB Attenuator}) - \text{Pre-amplifier Gain}$$

FCC ID: ZNFD851		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1405070946.ZNF	Test Dates: 5/06 - 5/28/2014	EUT Type: Portable Handset	Page 12 of 45	

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5180MHz  
 Channel: 36

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10360.00	-98.46	Peak	H	H	44.68	0.00	53.22	68.20	-14.98
* 15540.00	-109.74	Average	H	H	48.76	0.00	46.02	53.98	-7.96
* 15540.00	-98.12	Peak	H	H	48.76	0.00	57.64	73.98	-16.34
* 20720.00	-106.23	Average	H	H	44.00	-9.54	35.23	53.98	-18.75
* 20720.00	-98.79	Peak	H	H	44.00	-9.54	42.67	73.98	-31.31
25900.00	-100.33	Peak	H	H	44.87	-9.54	42.00	68.20	-26.20

**Table 6-3. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5200MHz  
 Channel: 40

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10400.00	-97.53	Peak	H	H	44.78	0.00	54.25	68.20	-13.95
* 15600.00	-109.42	Average	H	H	48.76	0.00	46.34	53.98	-7.64
* 15600.00	-97.72	Peak	H	H	48.76	0.00	58.04	73.98	-15.94
* 20800.00	-104.64	Average	H	H	43.99	-9.54	36.80	53.98	-17.18
* 20800.00	-99.26	Peak	H	H	43.99	-9.54	42.18	73.98	-31.80
26000.00	-100.22	Peak	H	H	44.97	-9.54	42.21	68.20	-25.99

**Table 6-4. Radiated Measurements**

FCC ID: ZNFD851		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1405070946.ZNF	Test Dates: 5/06 - 5/28/2014	EUT Type: Portable Handset	Page 13 of 45	

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5240MHz  
 Channel: 48

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10480.00	-97.90	Peak	H	H	45.00	0.00	54.10	68.20	-14.10
* 15720.00	-109.42	Average	H	H	48.80	0.00	46.38	53.98	-7.60
* 15720.00	-97.42	Peak	H	H	48.80	0.00	58.38	73.98	-15.60
* 20960.00	-104.23	Average	H	H	43.90	-9.54	37.12	53.98	-16.86
* 20960.00	-100.90	Peak	H	H	43.90	-9.54	40.45	73.98	-33.53
26200.00	-83.04	Peak	H	H	44.76	-9.54	59.17	68.20	-9.03

**Table 6-5. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5240MHz  
 Channel: 48

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
10480.00	-98.44	Peak	H	H	45.00	0.00	53.56	68.20	-14.64
* 15720.00	-109.57	Average	H	H	48.80	0.00	46.23	53.98	-7.75
* 15720.00	-97.81	Peak	H	H	48.80	0.00	57.99	73.98	-15.99
* 20960.00	-104.42	Average	H	H	43.90	-9.54	36.93	53.98	-17.05
* 20960.00	-100.32	Peak	H	H	43.90	-9.54	41.03	73.98	-32.95
26200.00	-80.57	Peak	H	H	44.76	-9.54	61.64	68.20	-6.56

**Table 6-6. Radiated Measurements with WCC**

FCC ID: ZNFD851		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1405070946.ZNF	Test Dates: 5/06 - 5/28/2014	EUT Type: Portable Handset	Page 14 of 45	

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5260MHz  
 Channel: 52

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	-98.57	Peak	H	H	45.06	0.00	53.49	68.20	-14.71
* 15780.00	-110.32	Average	H	H	48.90	0.00	45.58	53.98	-8.40
* 15780.00	-97.83	Peak	H	H	48.90	0.00	58.07	73.98	-15.91
* 21040.00	-106.12	Average	H	H	43.84	-9.54	35.18	53.98	-18.80
* 21040.00	-100.66	Peak	H	H	43.84	-9.54	40.64	73.98	-33.34
26300.00	-82.61	Peak	H	H	44.78	-9.54	59.63	68.20	-8.57

**Table 6-7. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5280MHz  
 Channel: 56

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	-98.48	Peak	H	H	45.08	0.00	53.60	68.20	-14.60
* 15840.00	-109.76	Average	H	H	49.11	0.00	46.36	53.98	-7.62
* 15840.00	-97.53	Peak	H	H	49.11	0.00	58.59	73.98	-15.39
* 21120.00	-106.84	Average	H	H	43.74	-9.54	34.36	53.98	-19.62
* 21120.00	-101.05	Peak	H	H	43.74	-9.54	40.15	73.98	-33.83
26400.00	-80.33	Peak	H	H	44.72	-9.54	61.84	68.20	-6.36

**Table 6-8. Radiated Measurements**

Worst Case Mode: 802.11a

FCC ID: ZNFD851		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1405070946.ZNF	Test Dates: 5/06 - 5/28/2014	EUT Type: Portable Handset	Page 15 of 45	

Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5320MHz  
 Channel: 64

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	-110.38	Average	H	H	45.14	0.00	41.75	53.98	-12.23
* 10640.00	-98.25	Peak	H	H	45.14	0.00	53.88	73.98	-20.10
* 15960.00	-109.62	Average	H	H	49.57	0.00	46.96	53.98	-7.02
* 15960.00	-97.54	Peak	H	H	49.57	0.00	59.04	73.98	-14.94
* 21280.00	-106.61	Average	H	H	43.64	-9.54	34.49	53.98	-19.49
* 21280.00	-101.78	Peak	H	H	43.64	-9.54	39.32	73.98	-34.66
26600.00	-104.76	Peak	H	H	47.28	-9.54	39.98	68.20	-28.22

**Table 6-9. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5280MHz  
 Channel: 56

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	-98.64	Peak	H	H	45.08	0.00	53.44	68.20	-14.76
* 15840.00	-110.30	Average	H	H	49.11	0.00	45.82	53.98	-8.16
* 15840.00	-97.23	Peak	H	H	49.11	0.00	58.89	73.98	-15.09
* 21120.00	-107.14	Average	H	H	43.74	-9.54	34.06	53.98	-19.92
* 21120.00	-101.39	Peak	H	H	43.74	-9.54	39.81	73.98	-34.17
26400.00	-80.86	Peak	H	H	44.72	-9.54	61.31	68.20	-6.89

**Table 6-10. Radiated Measurements with WCC**

FCC ID: ZNFD851		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1405070946.ZNF	Test Dates: 5/06 - 5/28/2014	EUT Type: Portable Handset	Page 16 of 45	

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5500MHz  
 Channel: 100

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 11000.00	-109.26	Average	H	H	44.93	0.00	42.66	53.98	-11.32
* 11000.00	-97.43	Peak	H	H	44.93	0.00	54.49	73.98	-19.49
16500.00	-97.27	Peak	H	H	50.52	0.00	60.25	68.20	-7.95
22000.00	-101.02	Peak	H	H	43.92	-9.54	40.35	68.20	-27.85
27500.00	-107.62	Peak	H	H	48.51	-9.54	38.35	68.20	-29.85

**Table 6-11. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5580MHz  
 Channel: 116

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 11160.00	-109.65	Average	H	H	45.06	0.00	42.41	53.98	-11.57
* 11160.00	-97.86	Peak	H	H	45.06	0.00	54.20	73.98	-19.78
16740.00	-96.85	Peak	H	H	49.97	0.00	60.12	68.20	-8.08
* 22320.00	-106.76	Average	H	H	44.40	-9.54	35.10	53.98	-18.88
* 22320.00	-102.39	Peak	H	H	44.40	-9.54	39.47	73.98	-34.51
27900.00	-104.03	Peak	H	H	48.13	-9.54	41.56	68.20	-26.64

**Table 6-12. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5700MHz  
 Channel: 140

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11400.00	-110.55	Average	H	H	45.48	0.00	41.93	53.98	-12.05
* 11400.00	-98.49	Peak	H	H	45.48	0.00	53.99	73.98	-19.99
17100.00	-96.47	Peak	H	H	50.61	0.00	61.13	68.20	-7.07
* 22800.00	-107.02	Average	H	H	44.39	-9.54	34.83	53.98	-19.15
* 22800.00	-101.83	Peak	H	H	44.39	-9.54	40.02	73.98	-33.96
28500.00	-104.48	Peak	H	H	48.03	-9.54	41.01	68.20	-27.19

**Table 6-13. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5700MHz  
 Channel: 140

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11400.00	-110.87	Average	H	H	45.48	0.00	41.61	53.98	-12.37
* 11400.00	-99.07	Peak	H	H	45.48	0.00	53.41	73.98	-20.57
17100.00	-97.15	Peak	H	H	50.61	0.00	60.45	68.20	-7.75
22800.00	-106.89	Average	H	H	44.39	-9.54	34.96	53.98	-19.02
22800.00	-102.57	Peak	H	H	44.39	-9.54	39.28	73.98	-34.70
28500.00	-104.31	Peak	H	H	48.03	-9.54	41.18	68.20	-27.02

**Table 6-14. Radiated Measurements with WCC**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5745MHz  
 Channel: 149

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11490.00	-114.14	Average	H	H	46.89	0.00	39.75	53.98	-14.23
* 11490.00	-101.92	Peak	H	H	46.89	0.00	51.97	73.98	-22.01
17235.00	-102.00	Peak	H	H	52.28	0.00	57.28	68.20	-10.92
* 22980.00	-106.59	Average	H	H	44.46	-9.54	35.33	53.98	-18.65
* 22980.00	-100.95	Peak	H	H	44.46	-9.54	40.97	68.20	-27.23
28725.00	-103.83	Peak	H	H	47.91	-9.54	41.54	69.20	-27.66

**Table 6-15. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5785MHz  
 Channel: 157

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 11570.00	-113.38	Average	H	H	47.11	0.00	40.73	53.98	-13.25
* 11570.00	-101.56	Peak	H	H	47.11	0.00	52.55	73.98	-21.43
17355.00	-101.11	Peak	H	H	52.45	0.00	58.34	68.20	-9.86
23140.00	-99.97	Peak	H	H	44.43	-9.54	41.92	73.98	-32.06
28925.00	-103.81	Peak	H	H	47.79	-9.54	41.44	68.20	-26.76

**Table 6-16. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5825MHz  
 Channel: 165

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 11650.00	-113.43	Average	H	H	47.31	0.00	40.88	53.98	-13.10
* 11650.00	-101.91	Peak	H	H	47.31	0.00	52.40	73.98	-21.58
17475.00	-101.58	Peak	H	H	52.82	0.00	58.24	68.20	-9.96
23300.00	-99.62	Peak	H	H	44.41	-9.54	42.25	73.98	-31.73
29125.00	-104.22	Peak	H	H	47.83	-9.54	41.06	68.20	-27.14

**Table 6-17. Radiated Measurements**


Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5785MHz  
 Channel: 157

Frequency [MHz]	Analyzer Level [dBm]	Detector	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 11570.00	-113.80	Average	H	H	47.11	0.00	40.31	53.98	-13.67
* 11570.00	-101.37	Peak	H	H	47.11	0.00	52.74	73.98	-21.24
17355.00	-101.57	Peak	H	H	52.45	0.00	57.88	68.20	-10.32
23140.00	-100.14	Peak	H	H	44.43	-9.54	41.75	73.98	-32.23
28925.00	-103.14	Peak	H	H	47.79	-9.54	42.11	68.20	-26.09

**Table 6-18. Radiated Measurements with WCC**

### 6.3 Radiated Band Edge Measurements (20MHz BW) §15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5180MHz  
 Channel: 36

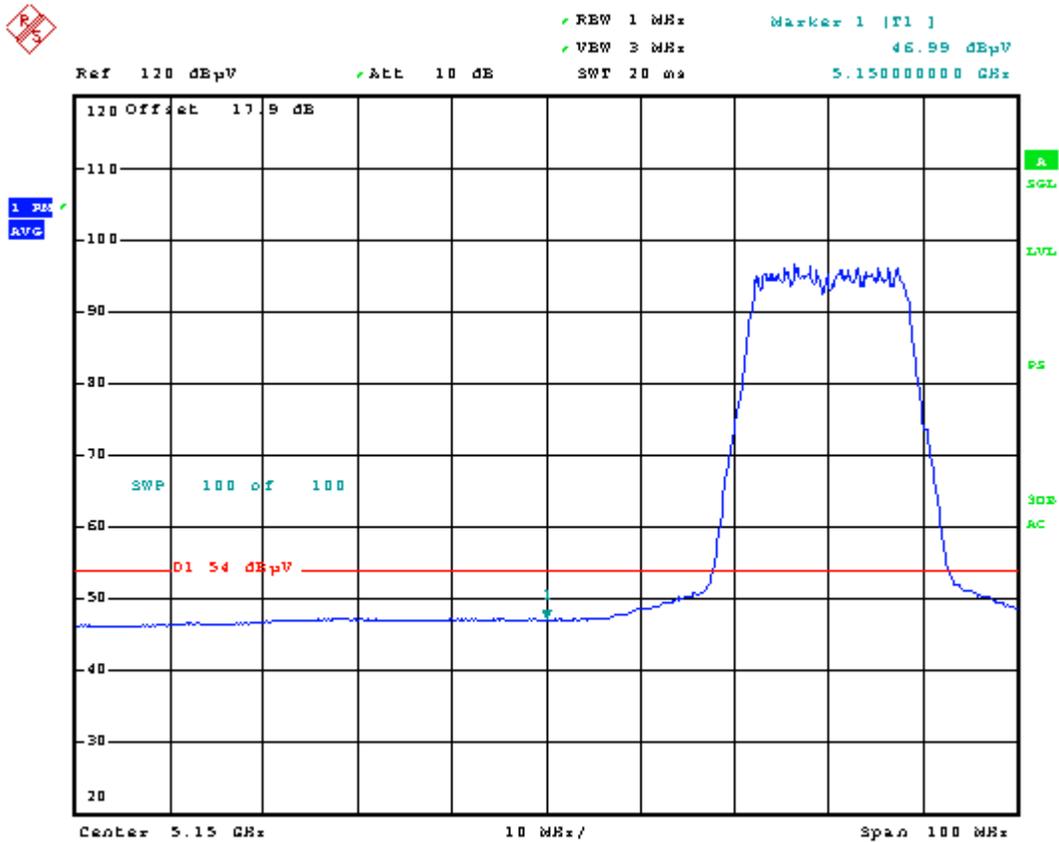

Plot 6-1. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)

FCC ID: ZNFD851	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1405070946.ZNF	Test Dates: 5/06 - 5/28/2014	EUT Type: Portable Handset	Page 21 of 45	

**Radiated Band Edge Measurements (20MHz BW)**  
§15.407(b.1)(b.2) §15.205 §15.209

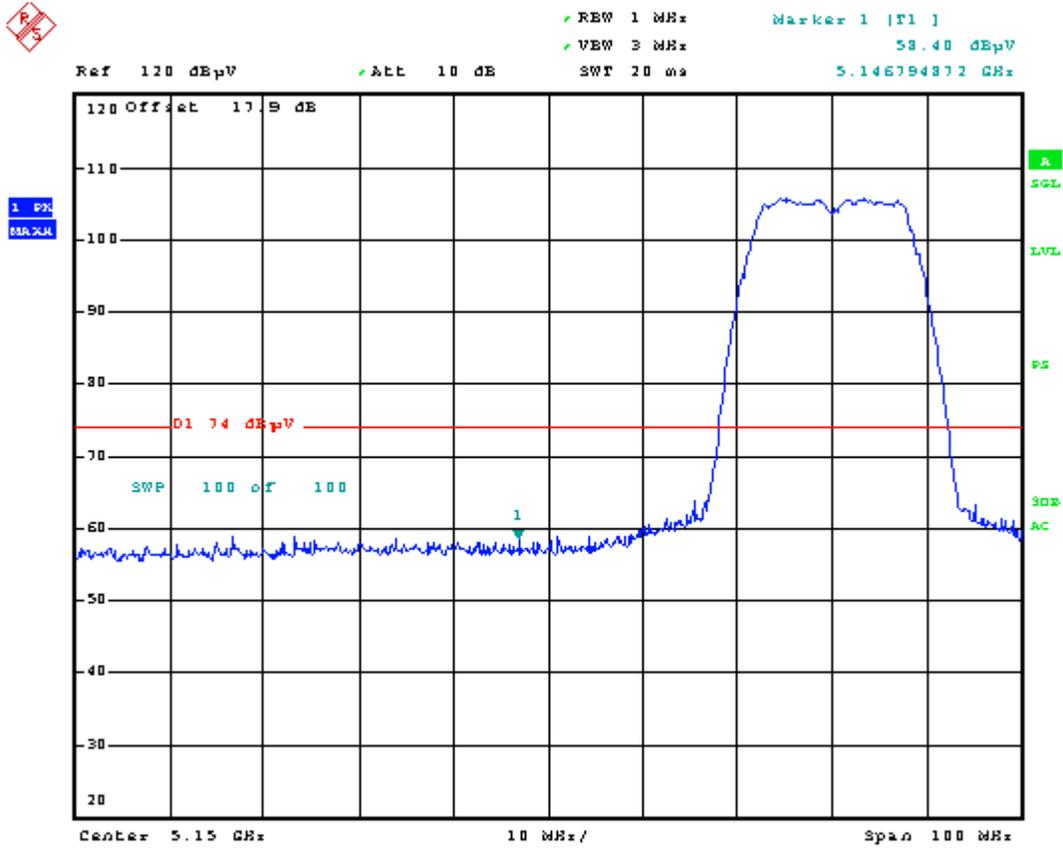


**Plot 6-2. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)**

<b>FCC ID:</b> ZNFD851	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1405070946.ZNF	<b>Test Dates:</b> 5/06 - 5/28/2014	<b>EUT Type:</b> Portable Handset	Page 22 of 45	

# Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5320MHz  
 Channel: 64

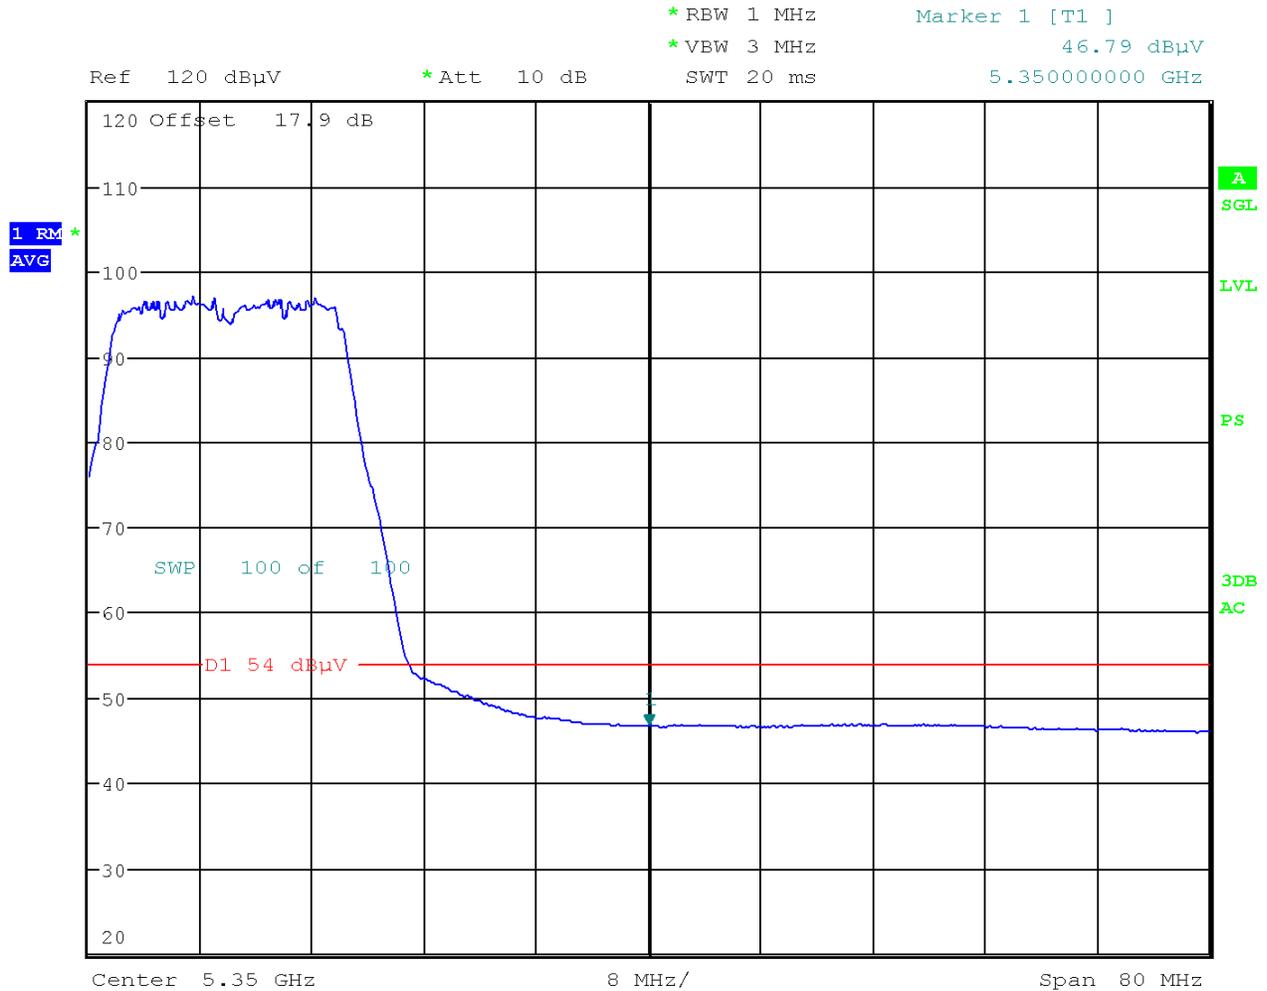


**Plot 6-3. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)**

FCC ID: ZNFD851	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1405070946.ZNF	Test Dates: 5/06 - 5/28/2014	EUT Type: Portable Handset	Page 23 of 45	

# Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

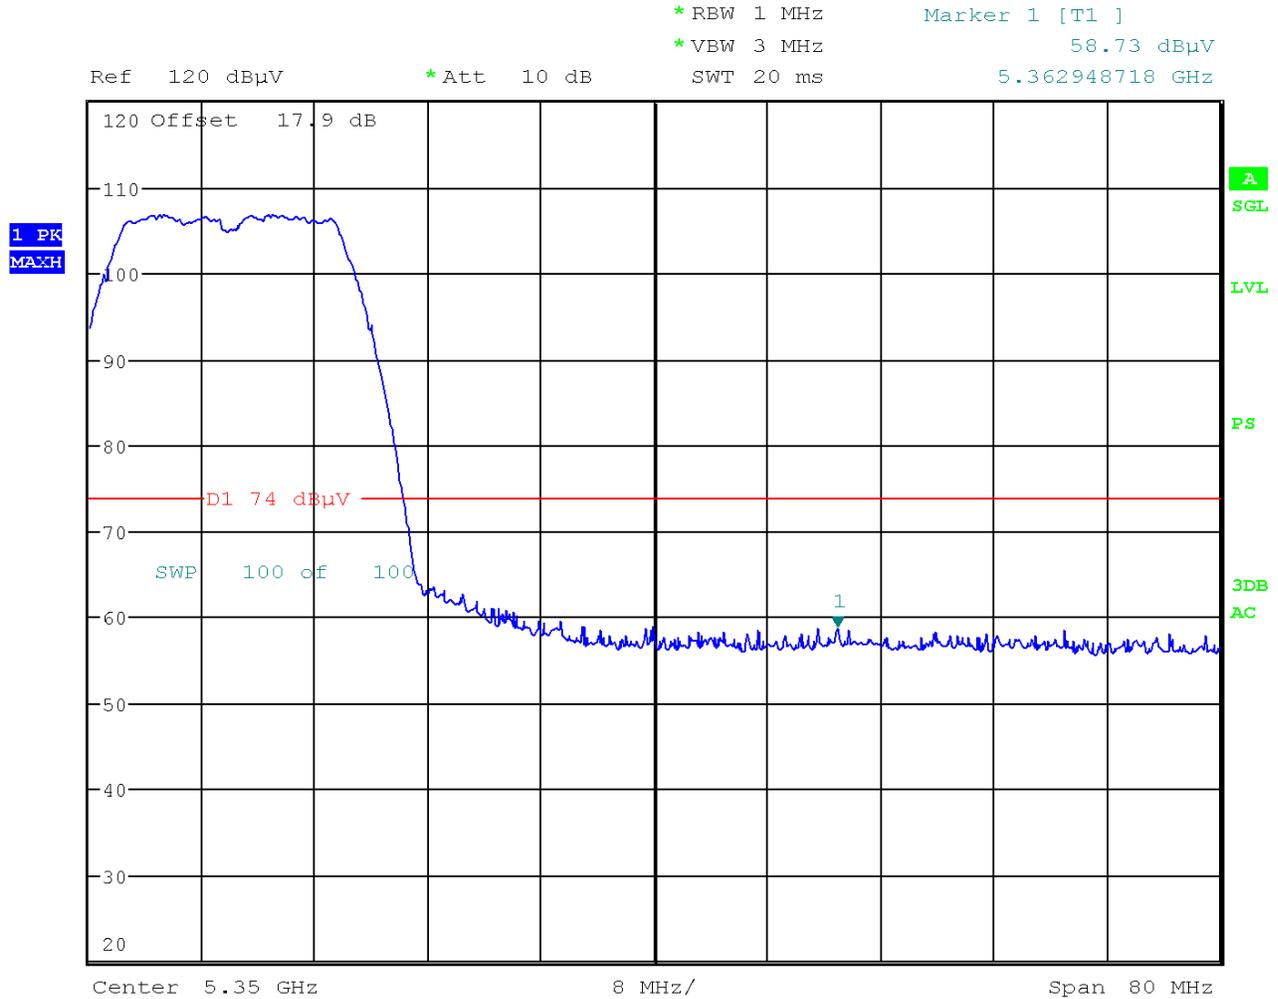


**Plot 6-4. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 2A)**

FCC ID: ZNFD851	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1405070946.ZNF	Test Dates: 5/06 - 5/28/2014	EUT Type: Portable Handset	Page 24 of 45	

# Radiated Band Edge Measurements (20MHz BW)

\$15.407(b.1)(b.2) \$15.205 \$15.209

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5500MHz  
 Channel: 100

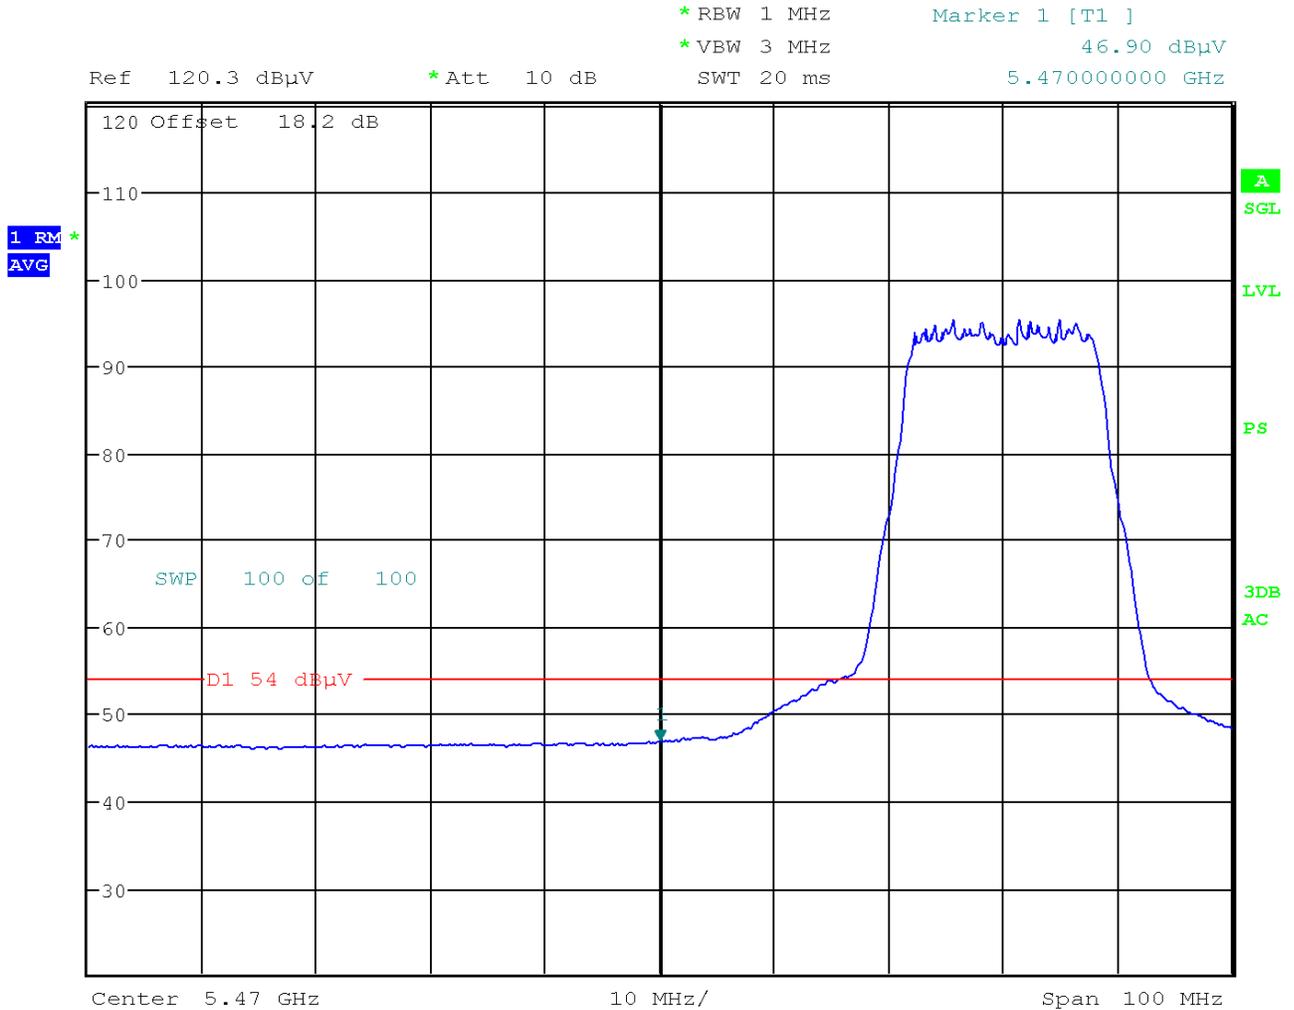


**Plot 6-5. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)**

FCC ID: ZNFD851		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1405070946.ZNF	Test Dates: 5/06 - 5/28/2014	EUT Type: Portable Handset	Page 25 of 45	

# Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

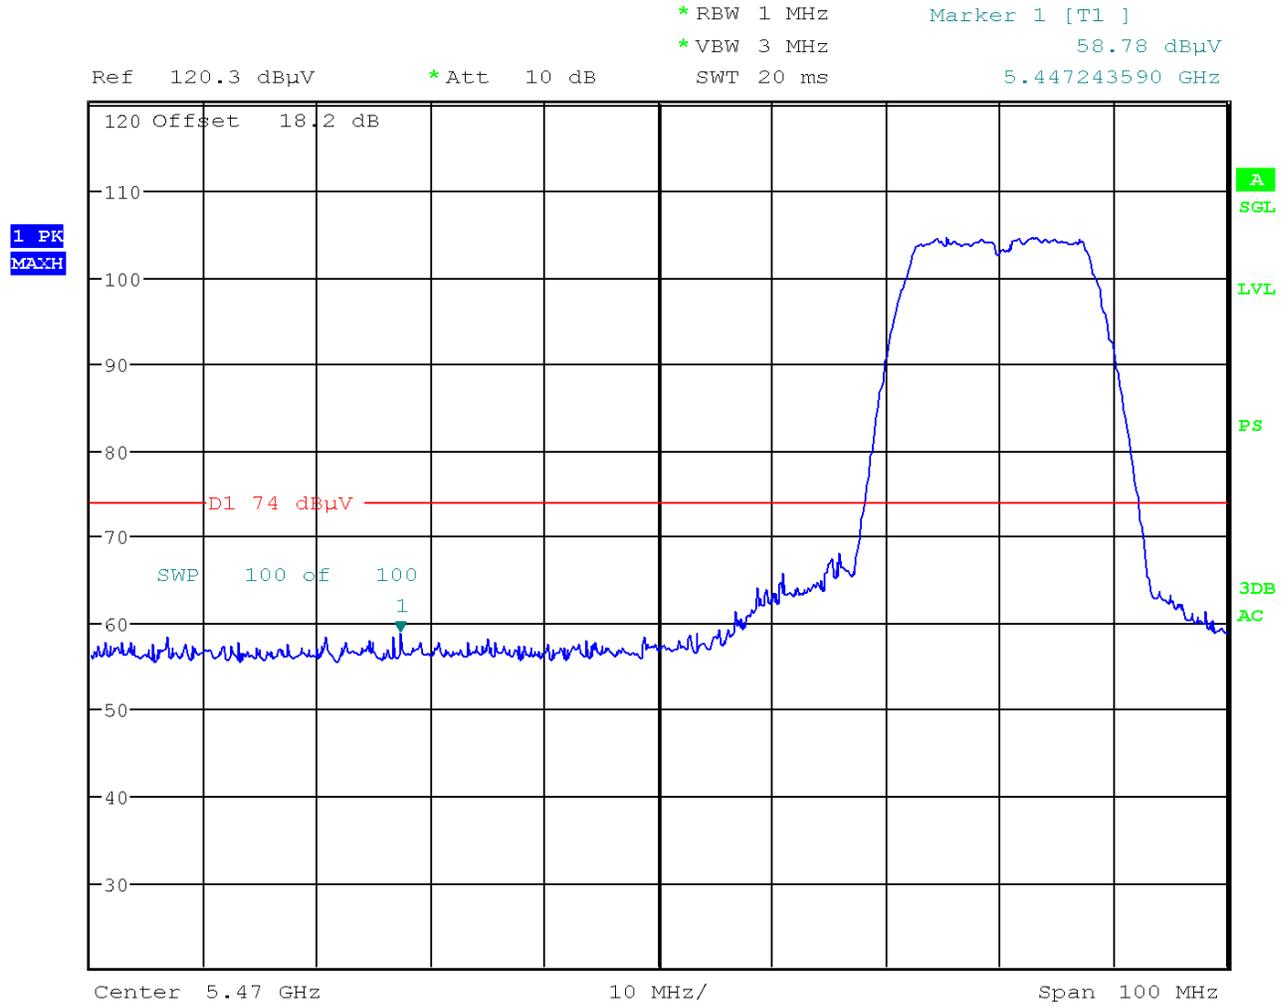

**Plot 6-6. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)**

FCC ID: ZNFD851	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1405070946.ZNF	Test Dates: 5/06 - 5/28/2014	EUT Type: Portable Handset	Page 26 of 45	

# Radiated Band Edge Measurements (20MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5825MHz

Channel: 165

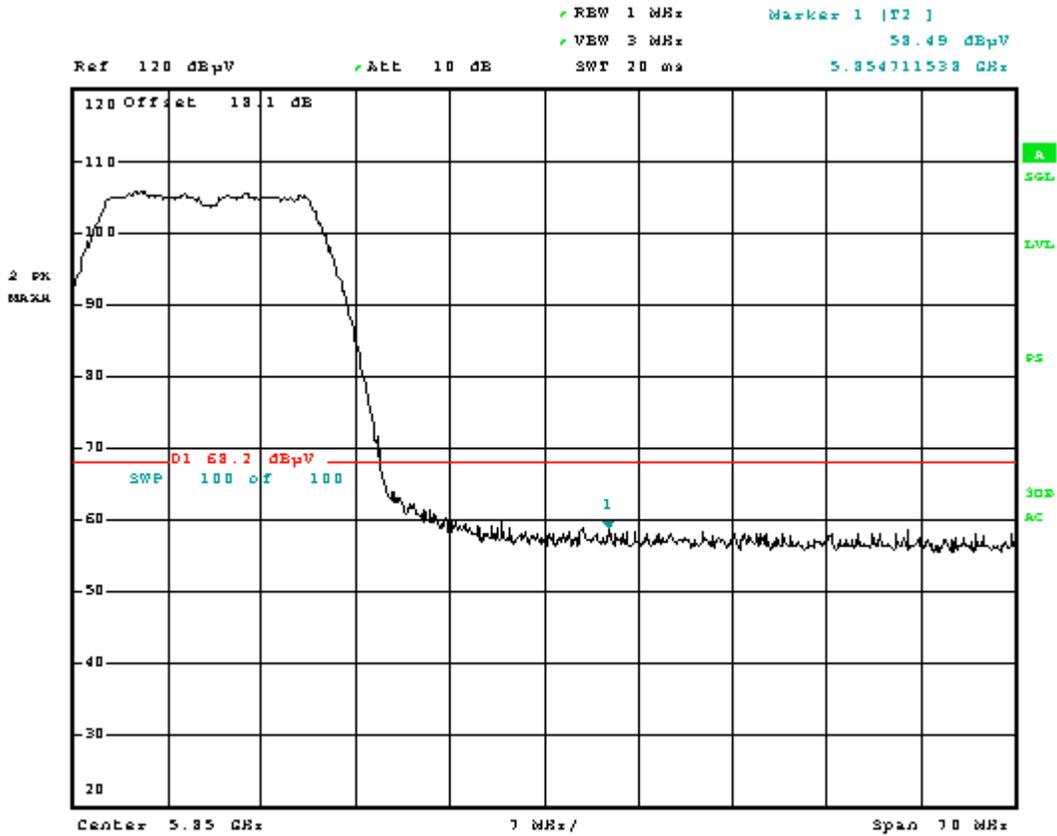


**Plot 6-7. Radiated Upper Band Edge Plot (Peak – UNII Band 3)**

FCC ID: ZNFD851	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1405070946.ZNF	Test Dates: 5/06 - 5/28/2014	EUT Type: Portable Handset	Page 27 of 45	

### 6.4 Radiated Band Edge Measurements (40MHz BW) §15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (40MHz)  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5190MHz  
 Channel: 38

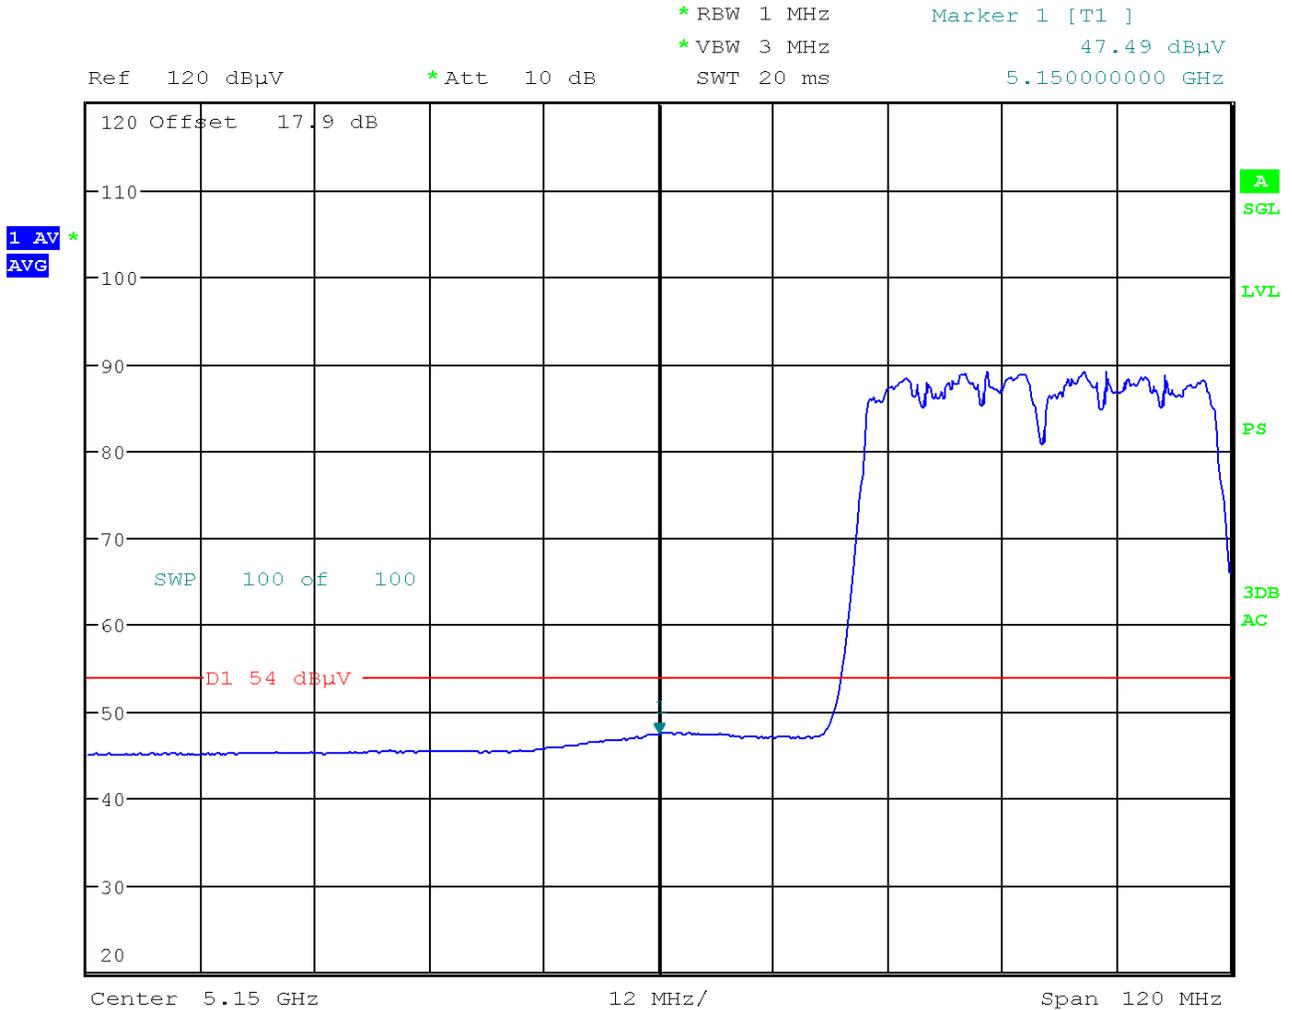


**Plot 6-8. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)**

FCC ID: ZNFD851		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1405070946.ZNF	Test Dates: 5/06 - 5/28/2014	EUT Type: Portable Handset		Page 28 of 45

# Radiated Band Edge Measurements (40MHz BW)

\$15.407(b.1)(b.2) \$15.205 \$15.209

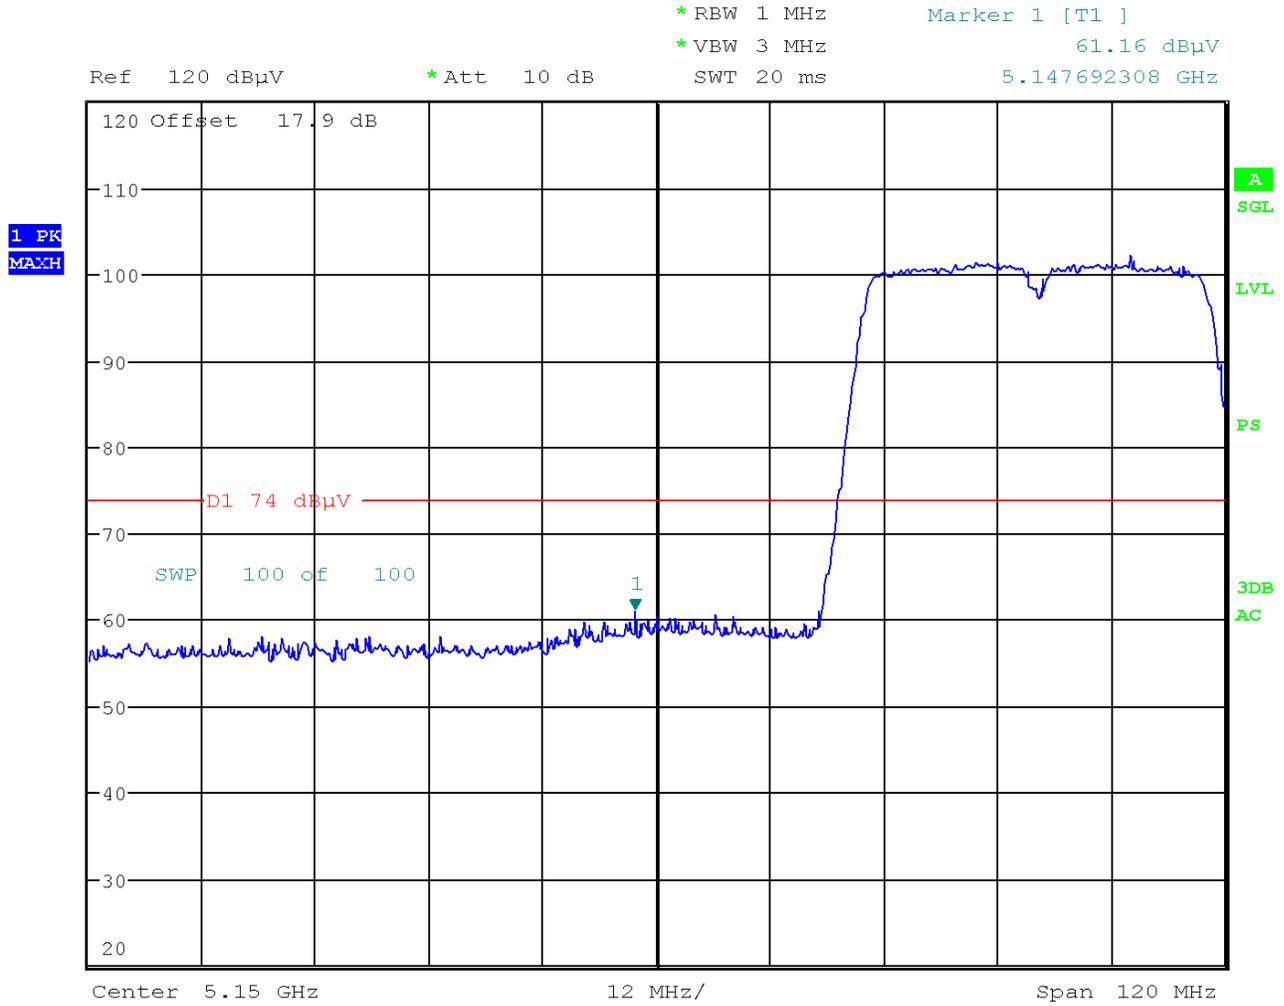


**Plot 6-9. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)**

FCC ID: ZNFD851	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1405070946.ZNF	Test Dates: 5/06 - 5/28/2014	EUT Type: Portable Handset	Page 29 of 45	

# Radiated Band Edge Measurements (40MHz BW)

\$15.407(b.1)(b.2) \$15.205 \$15.209

Worst Case Mode: 802.11n (40MHz)  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5310MHz  
 Channel: 62

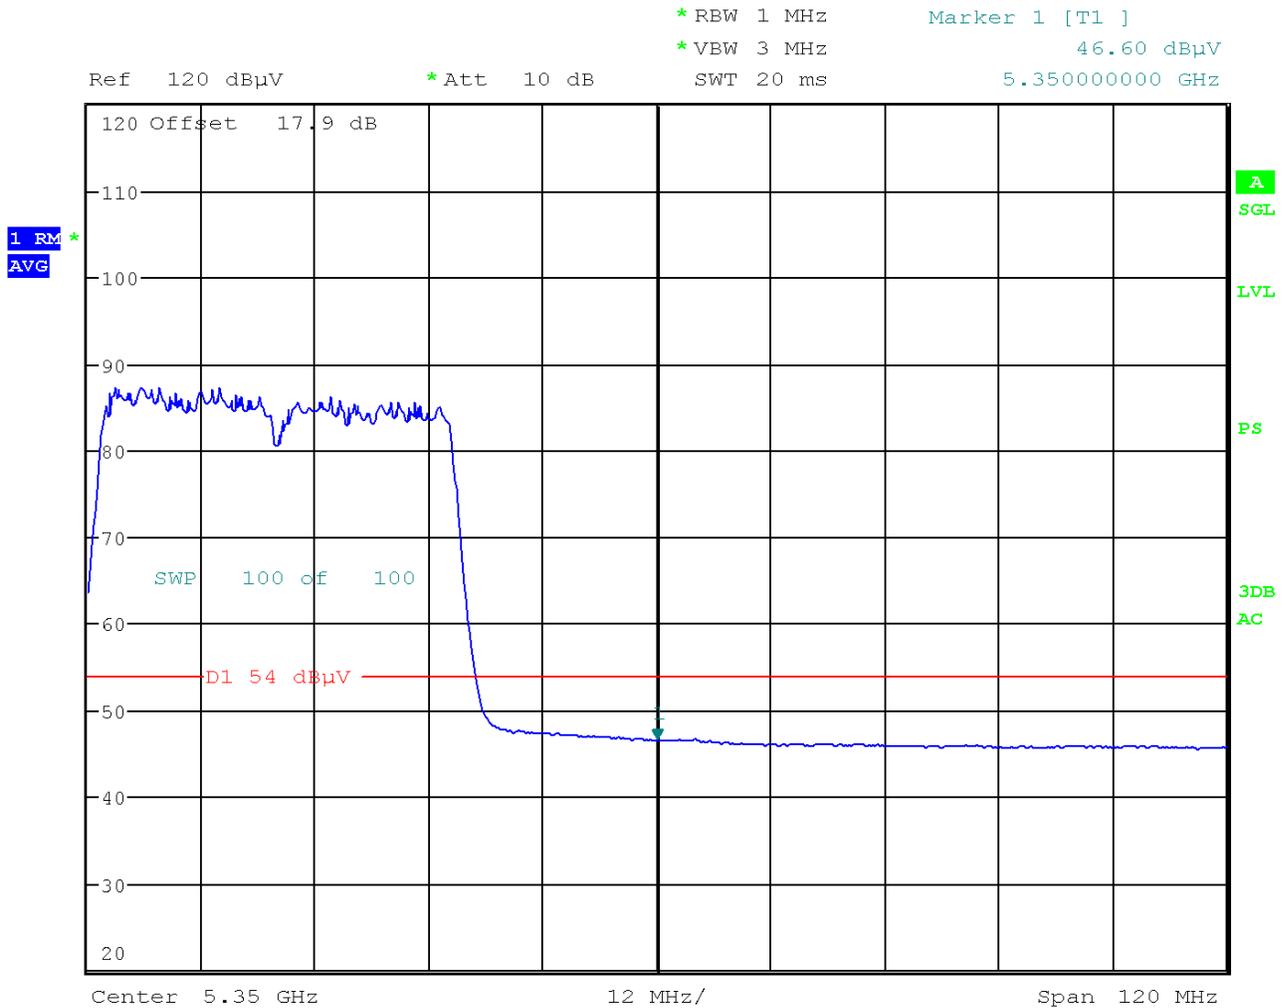


**Plot 6-10. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)**

FCC ID: ZNFD851	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1405070946.ZNF	Test Dates: 5/06 - 5/28/2014	EUT Type: Portable Handset	Page 30 of 45	

# Radiated Band Edge Measurements (40MHz BW)

\$15.407(b.1)(b.2) \$15.205 \$15.209

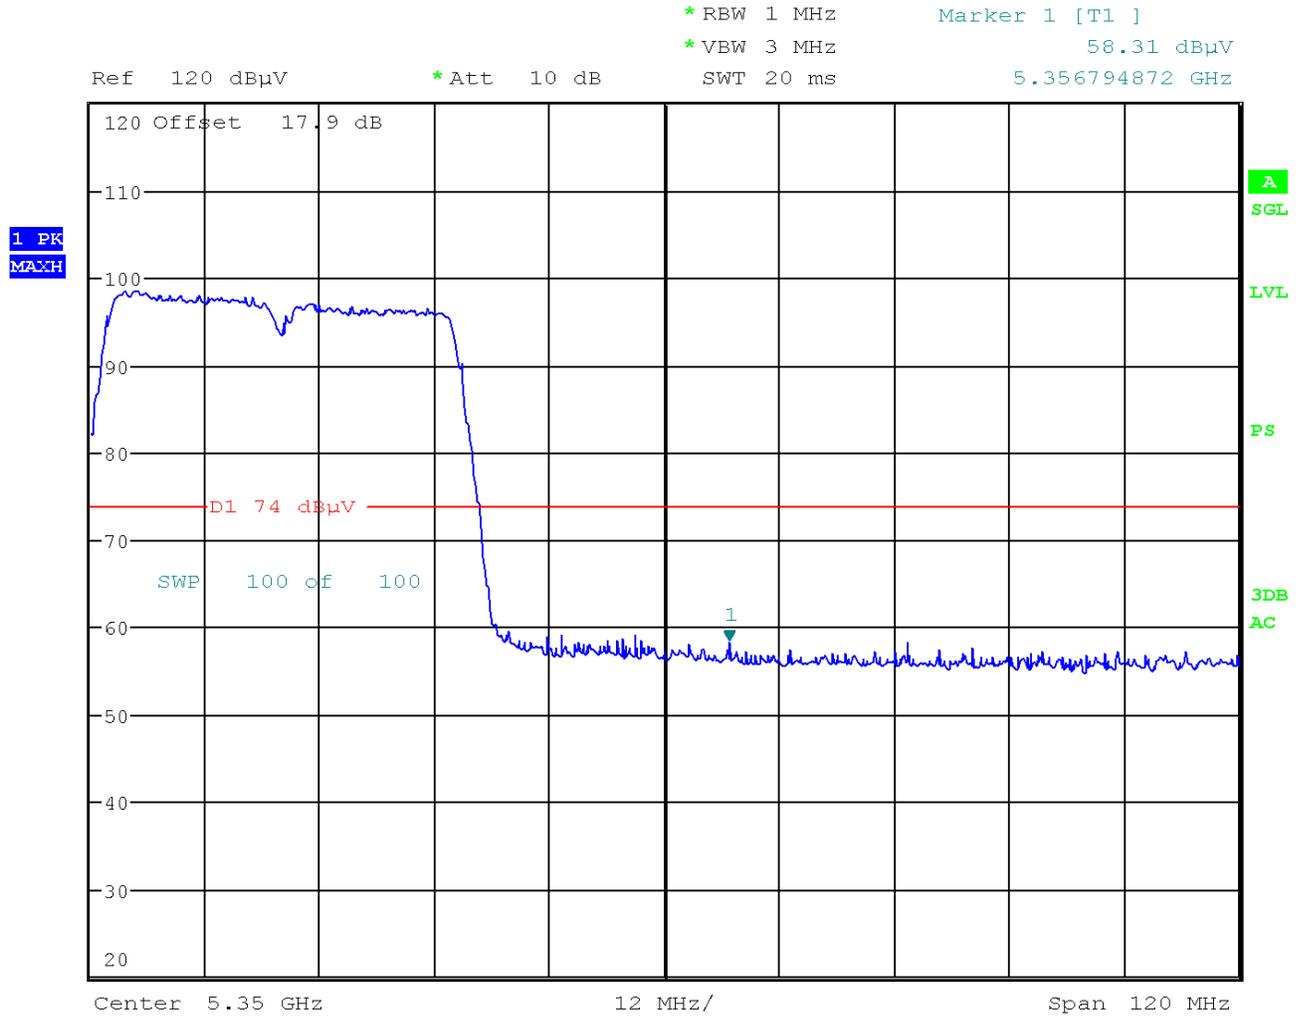


**Plot 6-11. Radiated Restricted Upper Band Edge Plot (Peak - UNII Band 2A)**

FCC ID: ZNFD851	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1405070946.ZNF	Test Dates: 5/06 - 5/28/2014	EUT Type: Portable Handset	Page 31 of 45	

# Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11n (40MHz)  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5510MHz  
 Channel: 102

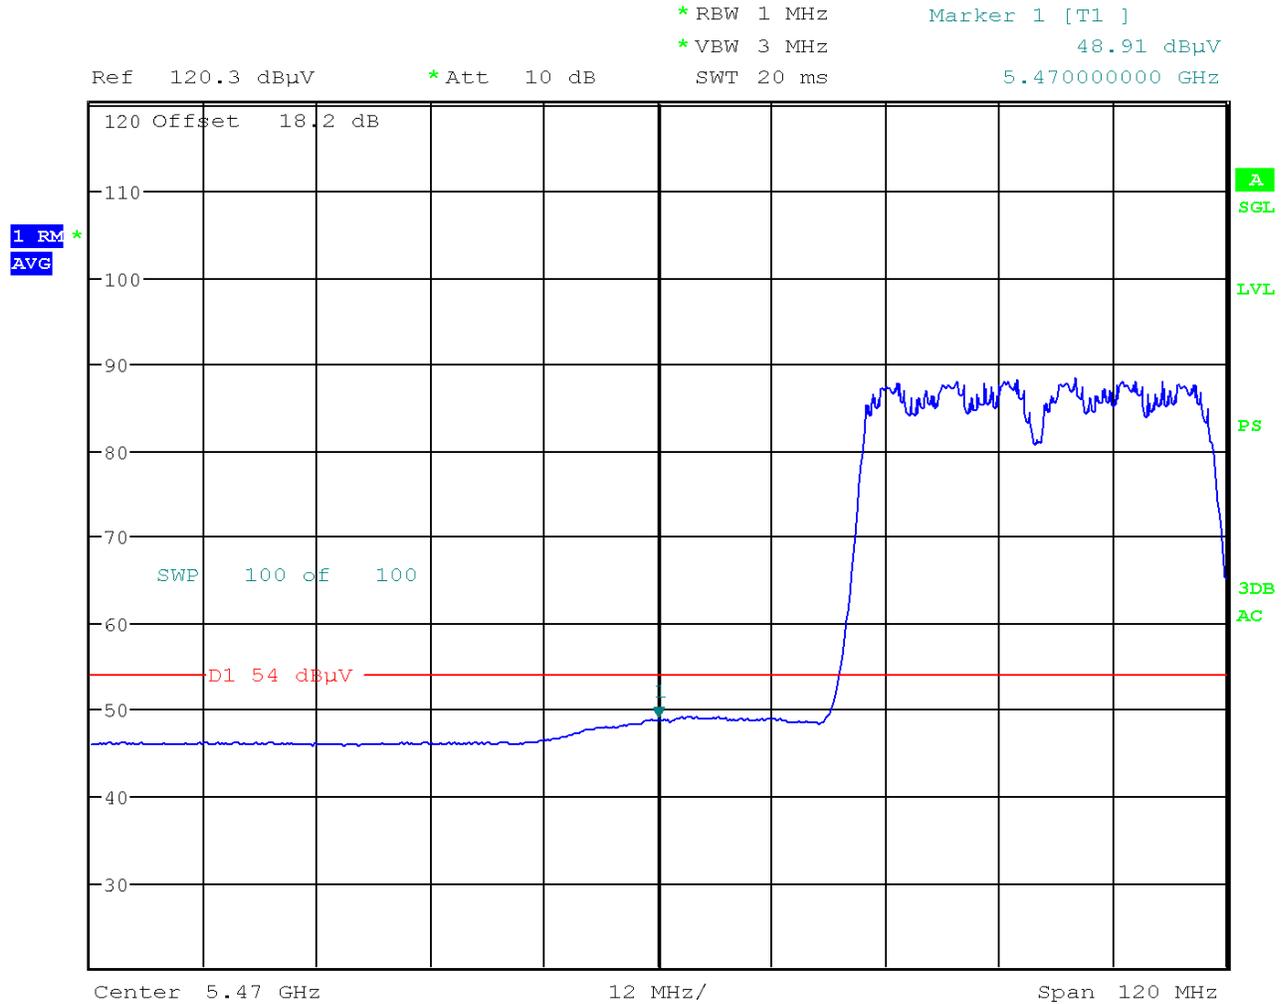

**Plot 6-12. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)**

FCC ID: ZNFD851		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1405070946.ZNF	Test Dates: 5/06 - 5/28/2014	EUT Type: Portable Handset		Page 32 of 45

**Radiated Band Edge Measurements (40MHz BW)**  
**\$15.407(b.1)(b.2) \$15.205 \$15.209**

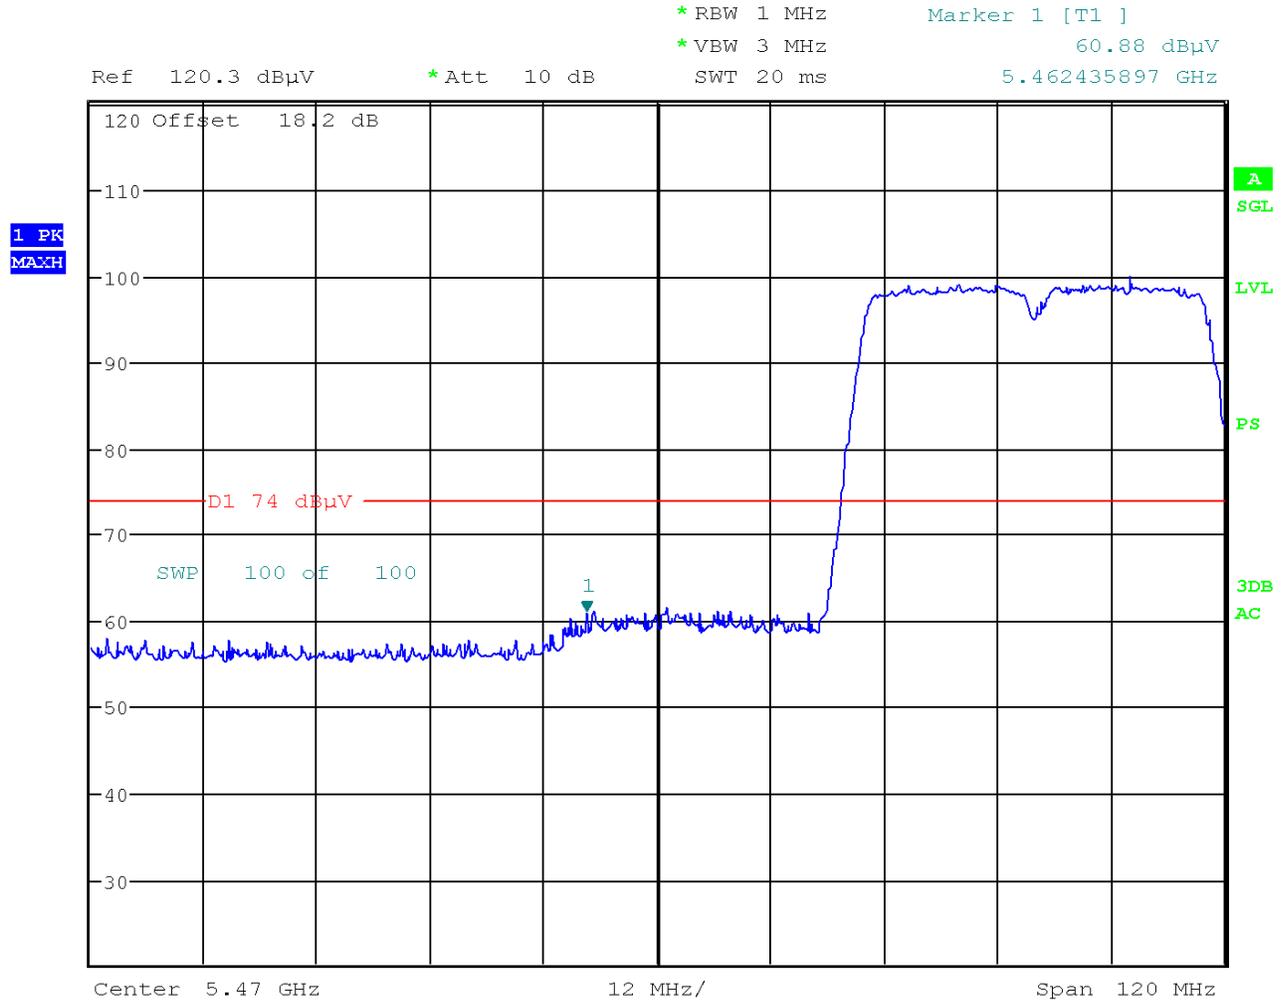

**Plot 6-13. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)**

<b>FCC ID:</b> ZNFD851		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1405070946.ZNF	<b>Test Dates:</b> 5/06 - 5/28/2014	<b>EUT Type:</b> Portable Handset	Page 33 of 45	

# Radiated Band Edge Measurements (40MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5795MHz

Channel: 159

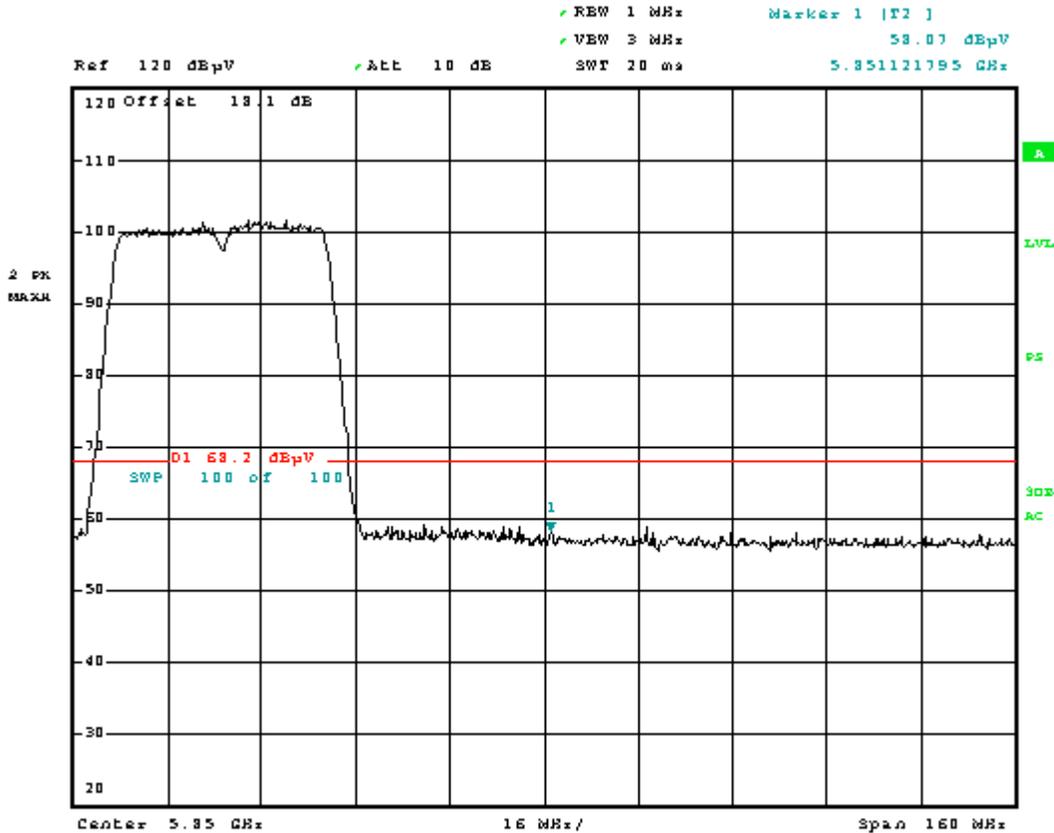


**Plot 6-14. Radiated Upper Band Edge Plot (Peak – UNII Band 3)**

FCC ID: ZNFD851		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1405070946.ZNF	Test Dates: 5/06 - 5/28/2014	EUT Type: Portable Handset		Page 34 of 45

## 6.5 Radiated Band Edge Measurements (80MHz BW)

\$15.407(b.1)(b.2) \$15.205 \$15.209


Worst Case Mode: 802.11n (80MHz)  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5210MHz  
 Channel: 42

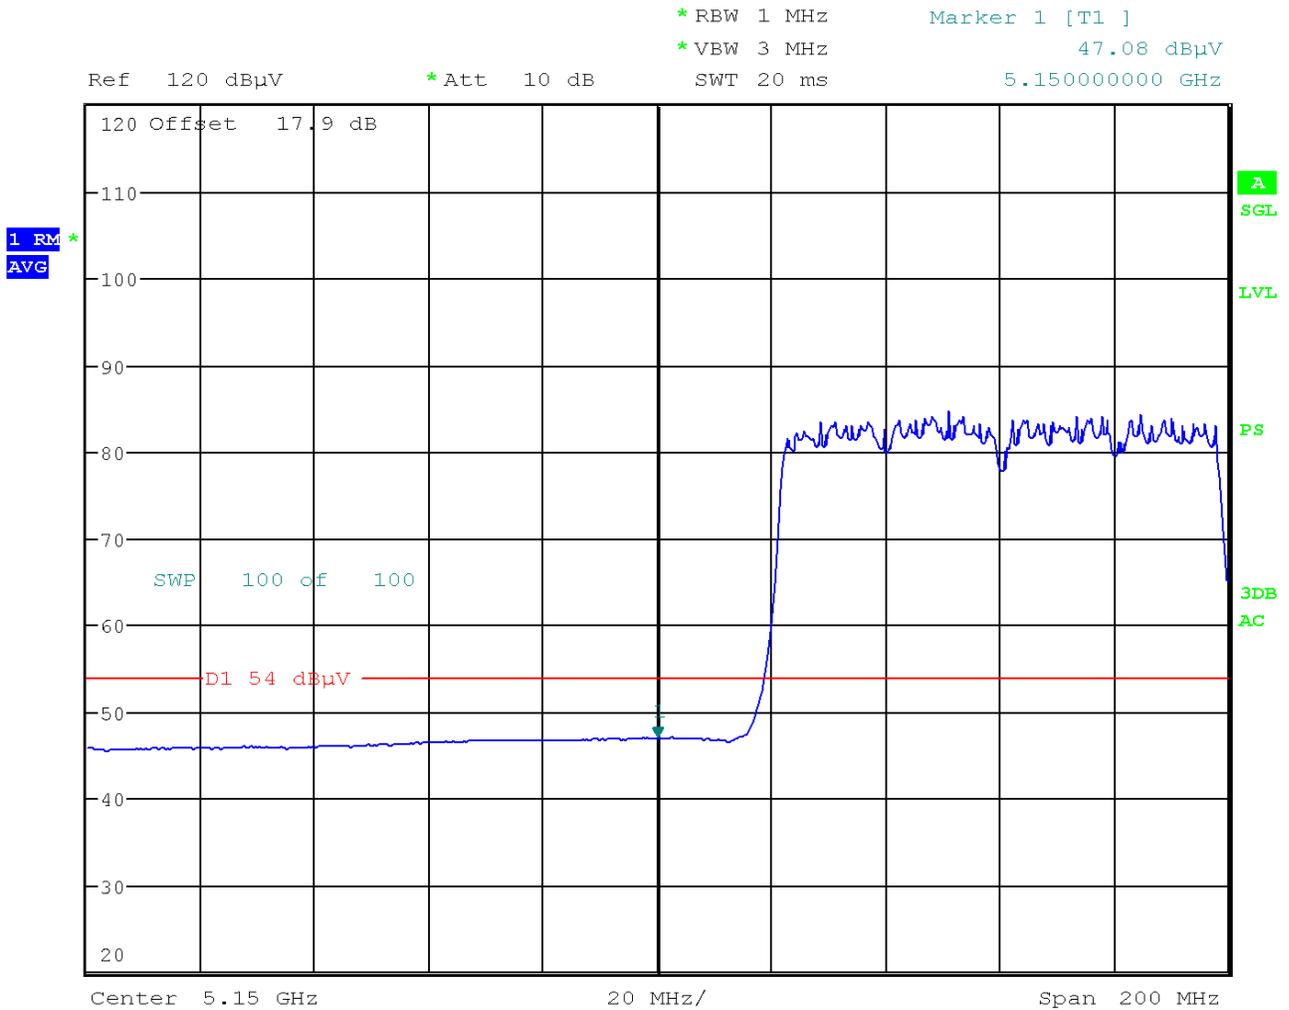

**Plot 6-15. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 1)**

FCC ID: ZNFD851	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1405070946.ZNF	Test Dates: 5/06 - 5/28/2014	EUT Type: Portable Handset	Page 35 of 45	

**Radiated Band Edge Measurements (80MHz BW)**  
\$15.407(b.1)(b.2) \$15.205 \$15.209

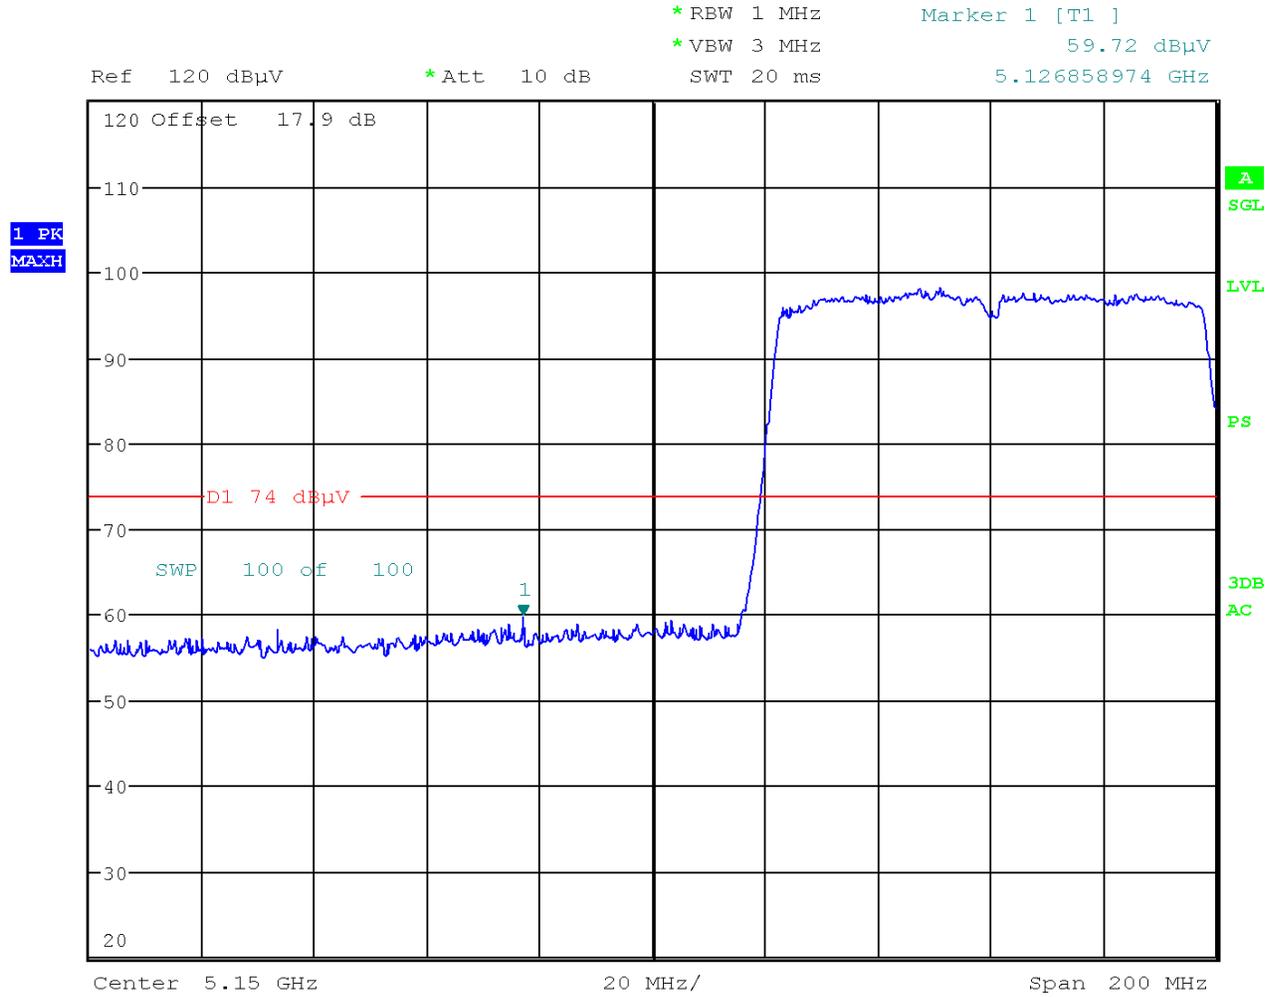


**Plot 6-16. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 1)**

FCC ID: ZNFD851	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1405070946.ZNF	Test Dates: 5/06 - 5/28/2014	EUT Type: Portable Handset	Page 36 of 45	

# Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11ac (80MHz)  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5290MHz  
 Channel: 58

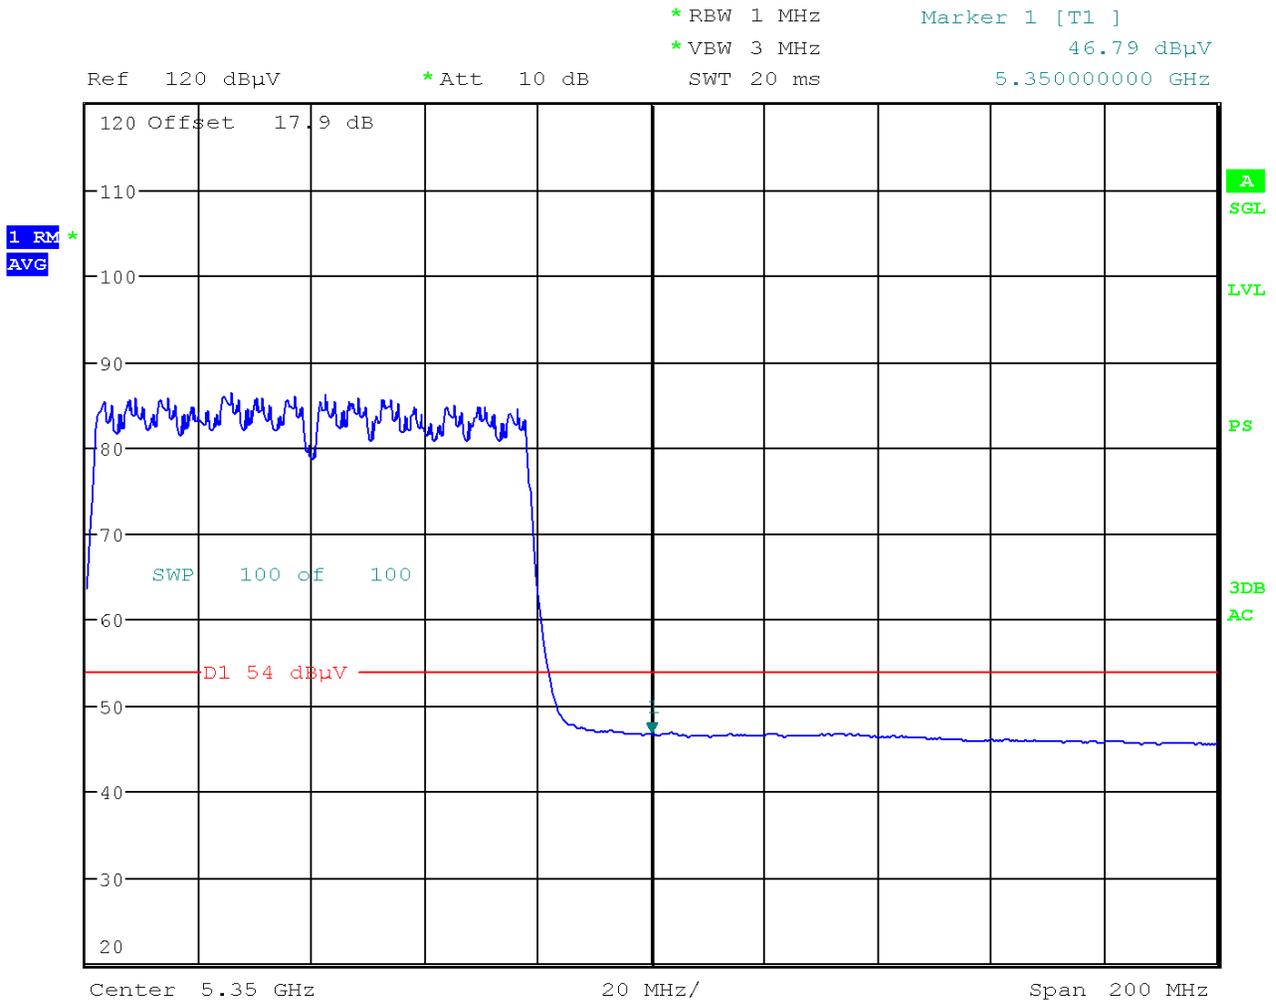

**Plot 6-17. Radiated Restricted Upper Band Edge Plot (Average – UNII Band 2A)**


FCC ID: ZNFD851	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1405070946.ZNF	Test Dates: 5/06 - 5/28/2014	EUT Type: Portable Handset	Page 37 of 45	



# Radiated Band Edge Measurements (80MHz BW)

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11ac (80MHz)  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5530MHz  
 Channel: 106

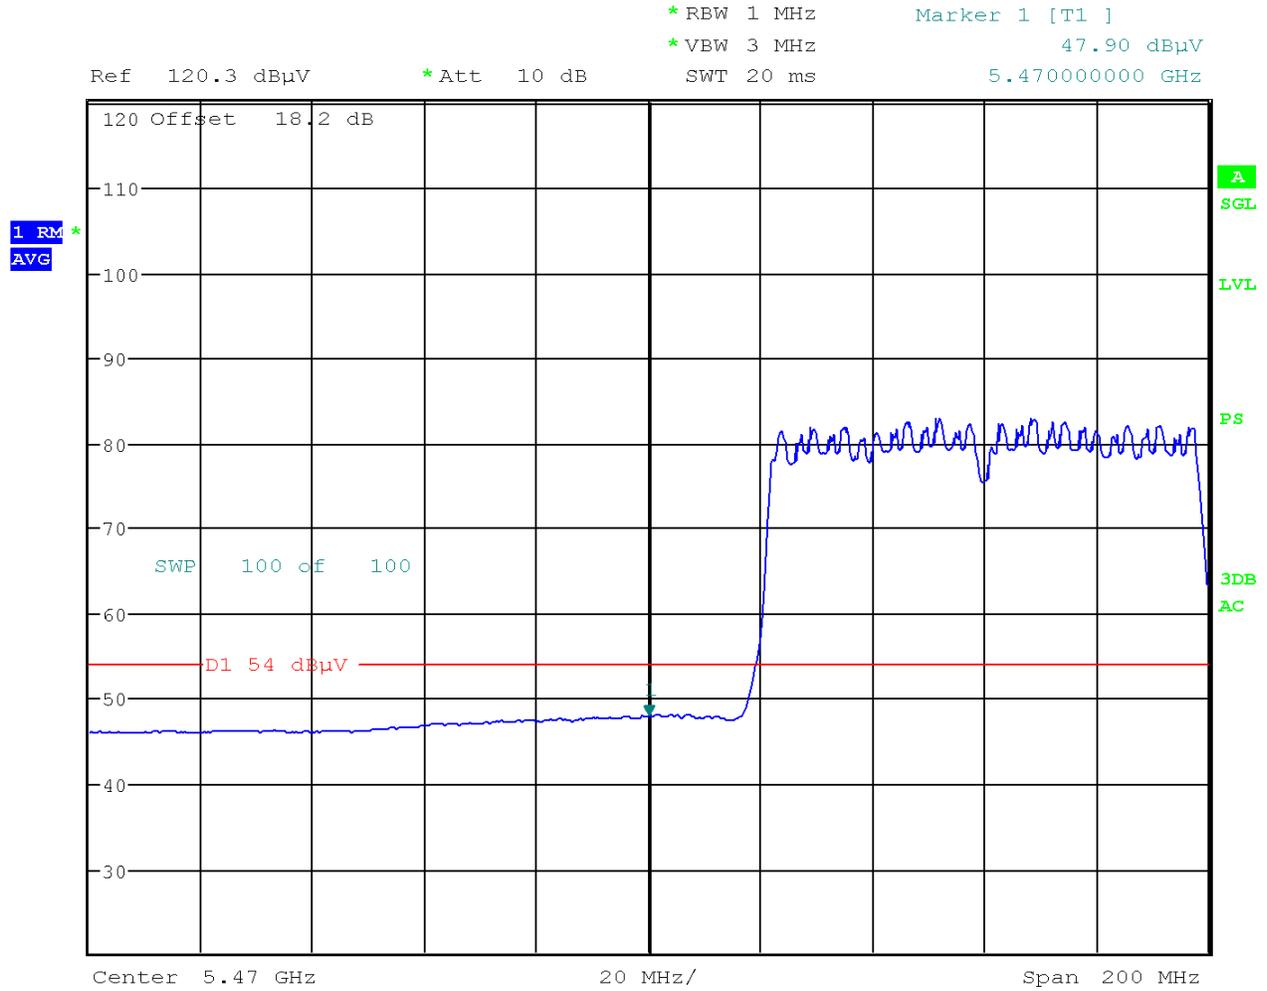

**Plot 6-19. Radiated Restricted Lower Band Edge Plot (Average – UNII Band 2C)**

FCC ID: ZNFD851		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1405070946.ZNF	Test Dates: 5/06 - 5/28/2014	EUT Type: Portable Handset	Page 39 of 45	

**Radiated Band Edge Measurements (80MHz BW)**  
**\$15.407(b.1)(b.2) \$15.205 \$15.209**

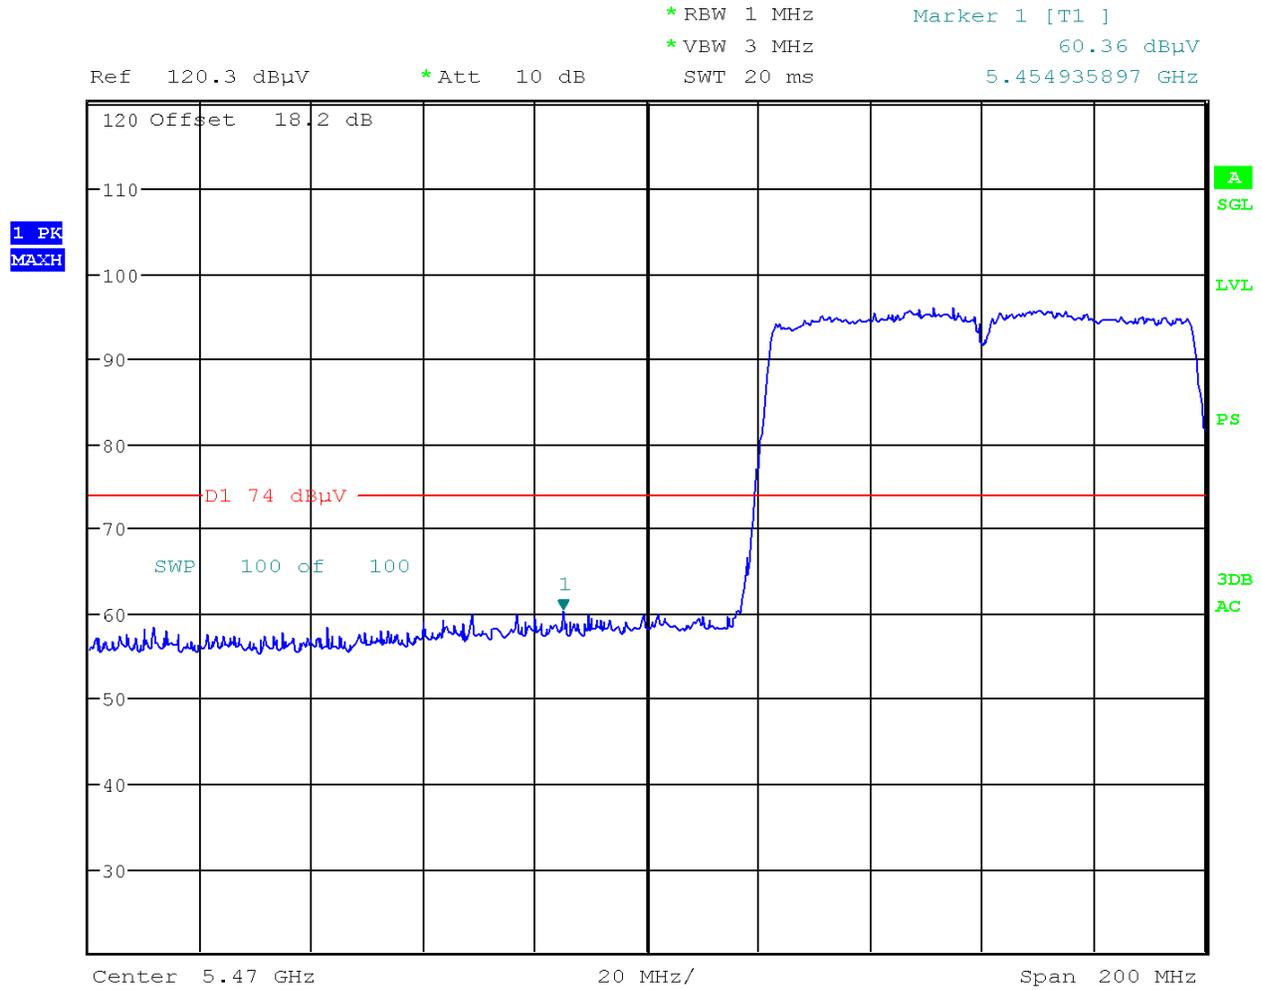


**Plot 6-20. Radiated Restricted Lower Band Edge Plot (Peak – UNII Band 2C)**

<b>FCC ID:</b> ZNFD851		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1405070946.ZNF	<b>Test Dates:</b> 5/06 - 5/28/2014	<b>EUT Type:</b> Portable Handset	Page 40 of 45	

**Radiated Band Edge Measurements (80MHz BW)**  
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11ac (80MHz)  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5530MHz  
 Channel: 106

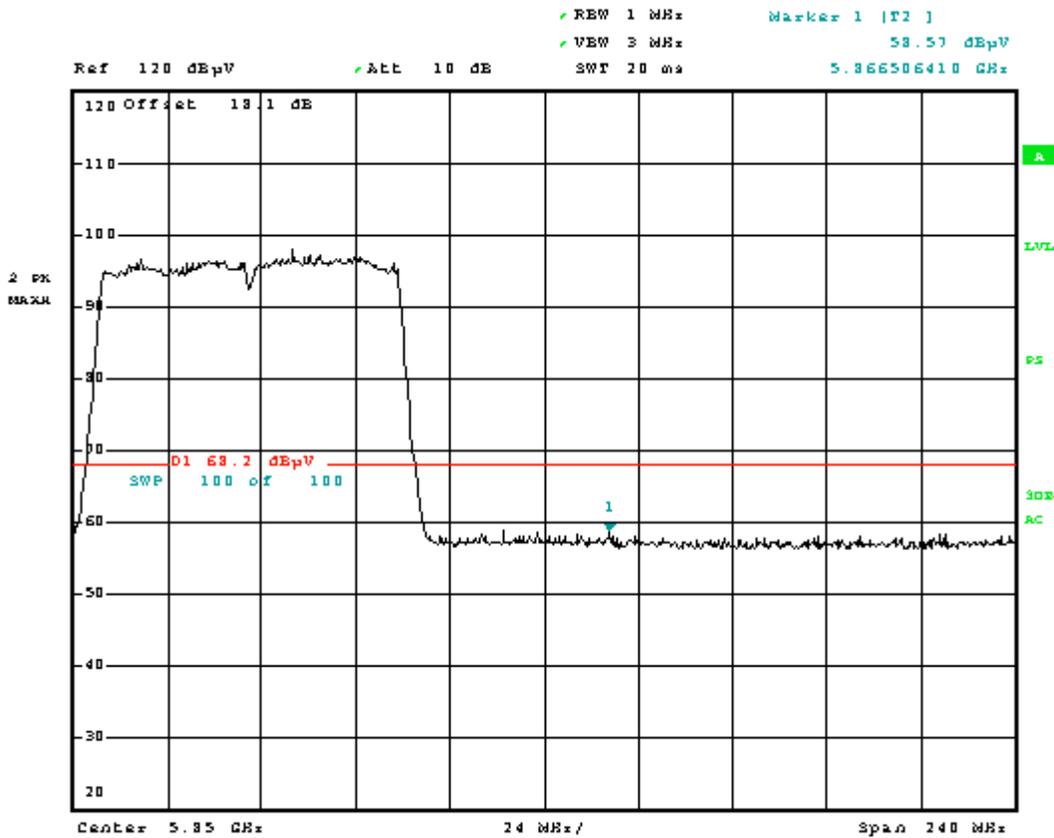

**Plot 6-21. Radiated Restricted Upper Band Edge Plot (Peak – UNII Band 3)**

FCC ID: ZNFD851		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1405070946.ZNF	Test Dates: 5/06 - 5/28/2014	EUT Type: Portable Handset		Page 41 of 45

## 6.6 WCC Radiated Band Edge Measurements

§15.407(b.1)(b.2) §15.205 §15.209


Worst Case Mode: 802.11a

Worst Case Transfer Rate: 6 Mbps

Distance of Measurements: 3 Meters

Operating Frequency: 5180MHz

Channel: 36

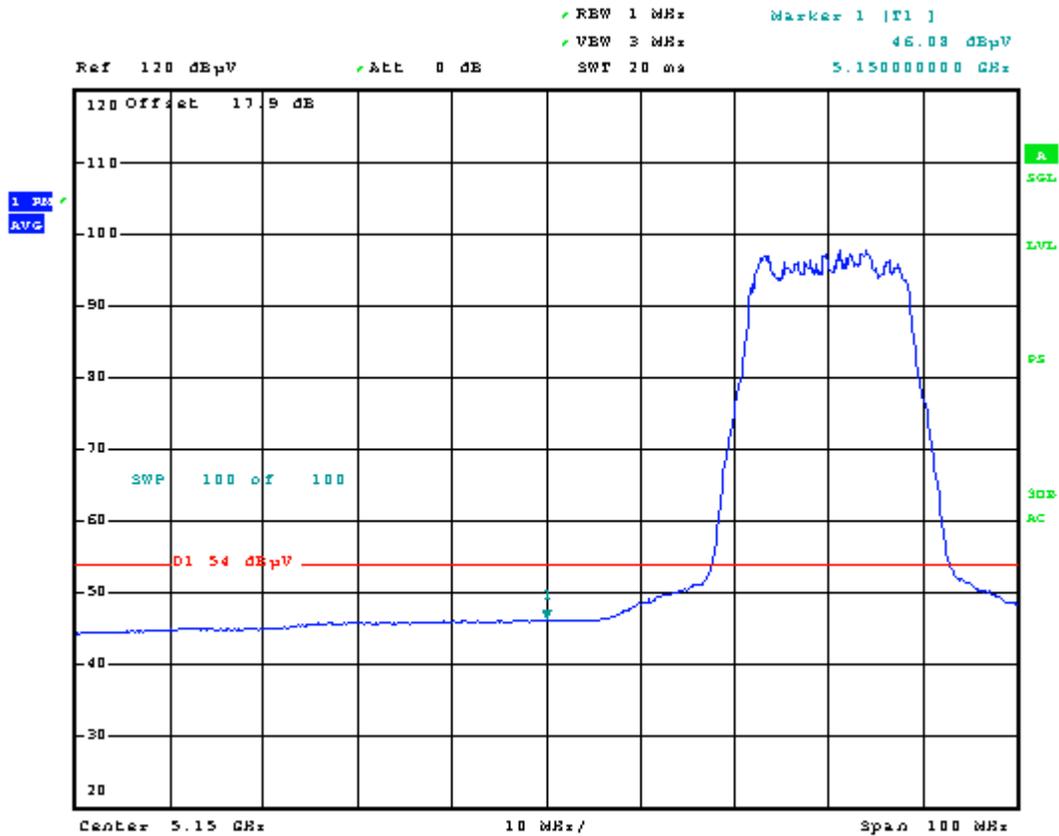


Plot 6-22. Radiated Restricted Upper Band Edge Plot with WCC (Average – UNII Band 3)

FCC ID: ZNFD851	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1405070946.ZNF	Test Dates: 5/06 - 5/28/2014	EUT Type: Portable Handset	Page 42 of 45	

**WCC Radiated Band Edge Measurements (40MHz BW)**  
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11n (40MHz)  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5510MHz  
 Channel: 102

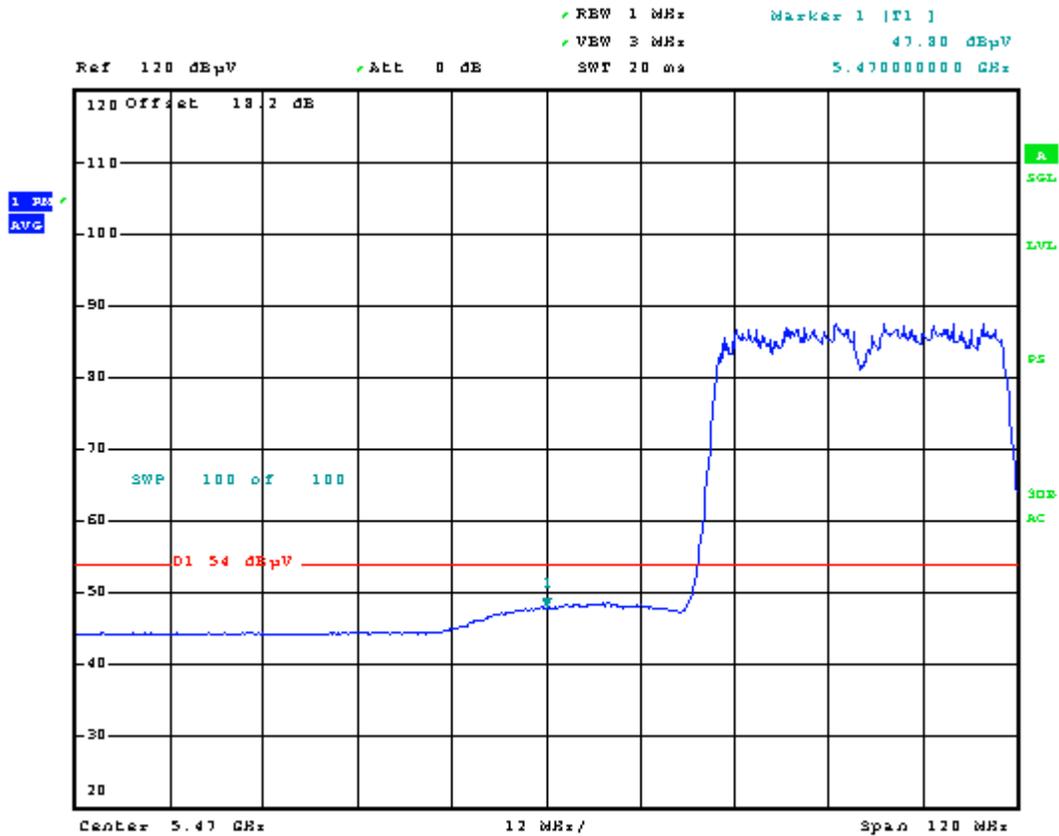


**Plot 6-23. Radiated Restricted Upper Band Edge Plot with WCC (Average – UNII Band 3)**

FCC ID: ZNFD851		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1405070946.ZNF	Test Dates: 5/06 - 5/28/2014	EUT Type: Portable Handset		Page 43 of 45

**Radiated Band Edge Measurements with WCC (80MHz BW)**  
§15.407(b.1)(b.2) §15.205 §15.209

Worst Case Mode: 802.11ac (80MHz)  
 Worst Case Transfer Rate: MCS8  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 5530MHz  
 Channel: 106

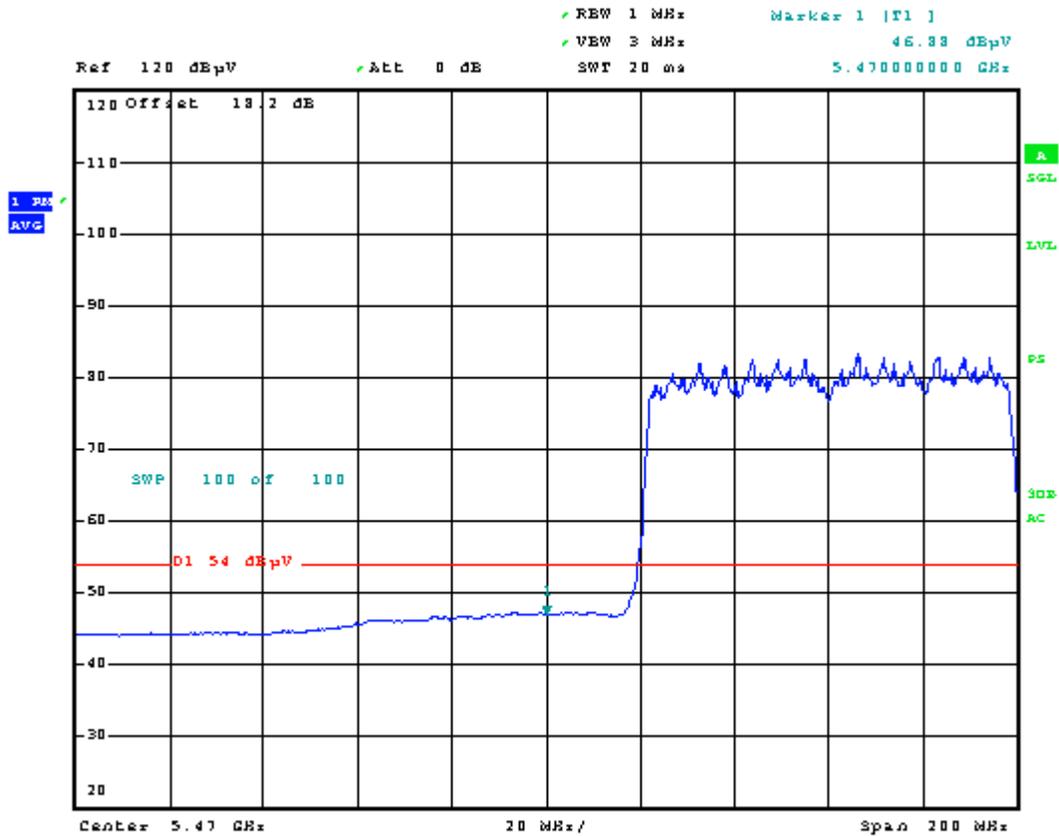

**Plot 6-24. Radiated Restricted Upper Band Edge Plot with WCC (Average – UNII Band 3)**

FCC ID: ZNFD851		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		Reviewed by: Quality Manager
Test Report S/N: 0Y1405070946.ZNF	Test Dates: 5/06 - 5/28/2014	EUT Type: Portable Handset	Page 44 of 45	

## 7.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **LG Portable Handset FCC ID: ZNFD851** is in compliance with Part 15E of the FCC Rules.

<b>FCC ID:</b> ZNFD851		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CLASS II PERMISSIVE CHANGE)		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1405070946.ZNF	<b>Test Dates:</b> 5/06 - 5/28/2014	<b>EUT Type:</b> Portable Handset	Page 45 of 45	