



HCT CO., LTD.

CERTIFICATE OF COMPLIANCE FCC Certification

Applicant Name:
LG Electronics MobileComm U.S.A., Inc.

Address:
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Date of Issue:

May 29, 2014

Test Site/Location:

HCT CO., LTD., 74, Seoicheon-ro 578beon-gil,
Majang-myeon, Icheon-si, Gyeonggi-do, Korea

Report No.: HCT-R-1405-F019-1

HCT FRN: 0005866421

FCC ID : ZNFD855P

APPLICANT : LG Electronics MobileComm U.S.A., Inc.

FCC Model(s): LG-D855P

Additional FCC Model(s): LG-D855p, D855P, D855p, LGD855P, LGD855p, LG-D855AR, LG-D855ar, LGD855AR, LGD855ar, D855AR, D855ar

EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC

Max. RF Output Power:

Wi-Fi 802.11a (5180~5240) (9.65 dBm)/ Wi-Fi 802.11a (5260~5320) (9.73 dBm)/
Wi-Fi 802.11a (5500~5700) (9.27 dBm)/ Wi-Fi 802.11n_20 MHz BW (5180~5240) (8.57 dBm)/
Wi-Fi 802.11n_20 MHz BW(5260~5320)(8.45 dBm)/ Wi-Fi 802.11n_20 MHz BW(5500~5700)(7.74 dBm)/
Wi-Fi 802.11n_40 MHz BW(5190~5230) (8.49 dBm)/ Wi-Fi 802.11n_40 MHz BW (5270~5310) (8.42 dBm)/
Wi-Fi 802.11n_40 MHz BW (5510~5670) (7.55 dBm)/ Wi-Fi 802.11ac_20 MHz BW (5180~5240) (8.63 dBm)/
Wi-Fi 802.11ac_20 MHz BW (5260~5320) (8.56 dBm)/ Wi-Fi 802.11ac_20 MHz (5500~5700) (8.34 dBm)/
Wi-Fi 802.11ac_40 MHz BW (5190~5230) (8.36 dBm)/ Wi-Fi 802.11ac_40 MHz BW (5270~5310) (8.28 dBm)/
Wi-Fi 802.11ac_40 MHz BW (5510~5670) (7.52 dBm)/ Wi-Fi 802.11ac_80 MHz BW (5210) (8.85 dBm)/
Wi-Fi 802.11ac_80 MHz BW (5290) (8.79 dBm)/ Wi-Fi 802.11ac_80 MHz BW (5530~5690) (8.16 dBm)

Frequency Range:

20 MHz BW: 5180 MHz - 5240 MHz (UNII 1)/ 5260 MHz - 5320 MHz (UNII 2)/
5500 MHz - 5700 MHz (UNII 2e)
40 MHz BW: 5190 MHz - 5230 MHz (UNII 1)/ 5270 MHz - 5310 MHz (UNII 2)/
5510 MHz - 5670 MHz (UNII 2e)
80 MHz BW: 5210 MHz(UNII 1)/ 5290 MHz(UNII 2)/ 5530 MHz - 5690 MHz(UNII 2e)

Modulation type

OFDM

FCC Classification:

Unlicensed National Information Infrastructure(UNII)

FCC Rule Part(s):

Part 15.407

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

Report prepared by
: Kyoung Houn Seo
Test engineer of RF Team

Approved by
: Chang Seok Choi
Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1405-F019	May 21, 2014	- First Approval Report
HCT-R-1405-F019-1	May 29, 2014	- Add the include details identifying WCP on page 5 - Revised the Section 8.4 - Revised the Section 9.1

Table of Contents

1. GENERAL INFORMATION	4
2. EUT DESCRIPTION	5
3. TEST METHODOLOGY	6
3.1 EUT CONFIGURATION	6
3.2 EUT EXERCISE	6
3.3 GENERAL TEST PROCEDURES	6
3.4 DESCRIPTION OF TEST MODES	6
4. INSTRUMENT CALIBRATION.....	7
5. FACILITIES AND ACCREDITATIONS	7
5.1 FACILITIES	7
5.2 EQUIPMENT	7
6. ANTENNA REQUIREMENTS	7
7. SUMMARY OF TEST RESULTS	8
8. TEST RESULT	9
8.1 DUTY CYCLE.....	9
8.2 26 dB BANDWIDTH MEASUREMENT	1 2
8.3 OUTPUT POWER MEASUREMENT.....	4 2
8.4 POWER SPECTRAL DENSITY	6 8
8.5 PEAK EXCURSION RATIO.....	8 3
8.6 FREQUENCY STABILITY	1 1 0
8.7 RADIATED MEASUREMENT.....	1 1 9
8.7.1 RADIATED SPURIOUS EMISSIONS.....	1 1 9
8.7.2 RADIATED RESTRICTED BAND EDGE MEASUREMENTS	2 1 5
8.8 POWERLINE CONDUCTED EMISSIONS	2 3 8
9. LIST OF TEST EQUIPMENT	2 4 7
9.1 LIST OF TEST EQUIPMENT(Conducted Test)	2 4 7
9.2 LIST OF TEST EQUIPMENT(Radiated Test).....	2 4 8

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



1. GENERAL INFORMATION

Applicant: LG Electronics MobileComm U.S.A., Inc.
Address: 1000 Sylvan Avenue, Englewood Cliffs NJ 07632
FCC ID: ZNFD855P
EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC
Model name(s): LG-D855P
Additional Model name(s): LG-D855p, D855P, D855p, LGD855P, LGD855p, LG-D855AR, LG-D855ar, LGD855AR, LGD855ar, D855AR, D855ar
Date(s) of Tests: April 09, 2014 ~ May 19, 2014
Place of Tests: HCT Co., Ltd.
74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea.
(IC Recognition No. : 5944A-3)

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P

2. EUT DESCRIPTION

EUT Type	Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	
FCC Model Name	LG-D855P	
Additional FCC Model Name	LG-D855p, D855P, D855p, LGD855P, LGD855p, LG-D855AR, LG-D855ar, LGD855AR, LGD855ar, D855AR, D855ar	
Power Supply	DC 3.8 V	
Battery type	Li-ion Battery(Standard)	
Frequency Range	TX_20 MHz BW:	5180 MHz - 5240 MHz (UNII 1)/ 5260 MHz - 5320 MHz (UNII 2)/ 5500 MHz - 5700 MHz (UNII 2e) where) Not supported 5600 MHz – 5640 MHz
	40 MHz BW:	5190 MHz - 5230 MHz (UNII 1)/ 5270 MHz - 5310 MHz (UNII 2)/ 5510 MHz - 5670 MHz (UNII 2e) where) Not supported 5590 MHz – 5630 MHz
	80 MHz BW:	5210 MHz(UNII 1)/ 5290 MHz(UNII 2)/ 5530 MHz - 5690 MHz(UNII 2e) where) Not supported 5610 MHz
	RX_20 MHz BW:	5180 MHz - 5240 MHz (UNII 1)/ 5260 MHz - 5320 MHz (UNII 2)/ 5500 MHz - 5700 MHz (UNII 2e) where) Not supported 5600 MHz – 5640 MHz
	40 MHz BW:	5190 MHz - 5230 MHz (UNII 1)/ 5270 MHz - 5310 MHz (UNII 2)/ 5510 MHz - 5670 MHz (UNII 2e) where) Not supported 5590 MHz – 5630 MHz
	80 MHz BW:	5210 MHz(UNII 1)/ 5290 MHz(UNII 2)/ 5530 MHz - 5690 MHz(UNII 2e) where) Not supported 5610 MHz
Max. RF Output Power:	Wi-Fi 802.11a (5180~5240) (9.65 dBm)/ Wi-Fi 802.11a (5260~5320) (9.73 dBm)/ Wi-Fi 802.11a (5500~5700) (9.27 dBm)/ Wi-Fi 802.11n_20 MHz BW (5180~5240) (8.57 dBm)/ Wi-Fi 802.11n_20 MHz BW(5260~5320)(8.45 dBm)/ Wi-Fi 802.11n_20 MHz BW(5500~5700)(7.74 dBm)/ Wi-Fi 802.11n_40 MHz BW(5190~5230) (8.49 dBm)/ Wi-Fi 802.11n_40 MHz BW (5270~5310) (8.42 dBm)/ Wi-Fi 802.11n_40 MHz BW (5510~5670) (7.55 dBm)/ Wi-Fi 802.11ac_20 MHz BW (5180~5240) (8.63 dBm)/ Wi-Fi 802.11ac_20 MHz BW (5260~5320) (8.56 dBm)/ Wi-Fi 802.11ac_20 MHz (5500~5700) (8.34 dBm)/ Wi-Fi 802.11ac_40 MHz BW (5190~5230) (8.36 dBm)/ Wi-Fi 802.11ac_40 MHz BW (5270~5310) (8.28 dBm)/ Wi-Fi 802.11ac_40 MHz BW (5510~5670) (7.52 dBm)/ Wi-Fi 802.11ac_80 MHz BW (5210) (8.85 dBm)/ Wi-Fi 802.11ac_80 MHz BW (5290) (8.79 dBm)/ Wi-Fi 802.11ac_80 MHz BW (5530~5690) (8.16 dBm)	
Modulation Type	OFDM(802.11a, 802.11n, 802.11ac)	
Antenna Specification	Manufacturer: AT&C Co.LTD. Antenna type:FPCB Antenna Peak Gain : -0.13 dBi	
Wireless Charger Pad	FCC ID: BEJWCP300 Manufacturer: LG Electronics USA	

Note: All test performed with the battery cover already incorporate the NFC antenna and Wireless charging capability.



3. TEST METHODOLOGY

The measurement procedure described in FCC KDB 789033 D01 General UNII Test Procedures v01r03 dated April 08, 2013 entitled “ Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices, the American National Standard for Testing Unlicensed Wireless Devices(ANSI C63.4-2003) – Part 15, Subpart E” were used in the measurement. For 802.11ac, KDB644545 D01 v01r01 dated April 08, 2013.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version :2003) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version: 2003)

Conducted Antenna Terminal

See Section from 8.1 to 8.4.(KDB 789033)

3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2003) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated February 28, 2014 (Registration Number: 90661)

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antennas of this E.U.T are permanently attached.

*The E.U.T Complies with the requirement of §15.203

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P

7. SUMMARY OF TEST RESULTS


Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
TRANSMITTER MODE(TX)				
26dB Bandwidth	NA	NA	CONDUCTED	PASS
Maximum Conducted Output Power	§15.407(a)(1)	< 50 mW or 4+10 log ₁₀ (BW) dBm (5150-5250 MHz) < 250 mW or 11+10 log ₁₀ (BW) dBm (5250-5350 MHz) < 250 mW or 11+10 log ₁₀ (BW) dBm (5470-5725 MHz) Whichever power is less		PASS
Peak Power Spectral Density	§15.407(a)(1), (5)	<4 dBm/ MHz (5150-5250) <11 dBm/ MHz (5250-5350) <11 dBm/ MHz (5470-5725)		PASS
Peak Excursion	§15.407(a)(6)	<13 dB/ MHz maximum difference		PASS
Frequency Stability	§15.407(g)	NA		PASS
AC Conducted Emissions 150 kHz-30 MHz	15.207	<FCC 15.207 limits		PASS
Undesirable Emissions	§15.407(b)(1), (2), (3)	<-27 dBm/ MHz EIRP (5150-5350 MHz, 5470-5725 MHz)		RADIATED
General Field Strength Limits(Restricted Bands and Radiated Emission Limits)	15.205, 5.407(b)(1), (5), (6)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	PASS	

8. TEST RESULT

8.1 DUTY CYCLE

The zero-span mode on a spectrum analyzer or EMI receiver, if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq EBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$, where T is defined in section B)1)a), and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

TEST CONFIGURATION

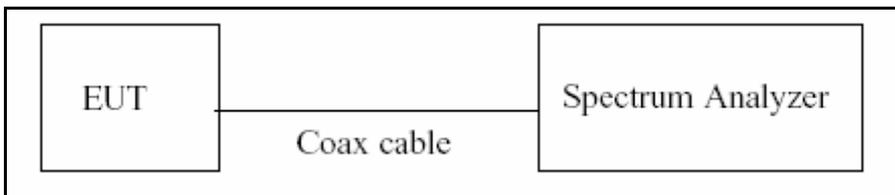

TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. We tested according to the zero-span measurement method, B)2) in KDB 789033(issued 04/08/2013)

The largest available value of RBW is 8 MHz and VBW is 50 MHz. The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.

1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on} / T_{total} and Duty Cycle Factor = $10 * \log(1 / \text{Duty Cycle})$

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P	

Duty Cycle Factor

Mode	Data Rate	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor
802.11a	6	2.019	2.132	0.94699812	0.237
	9	1.341	1.454	0.92228336	0.351
	12	1.009	1.130	0.89292035	0.492
	18	0.685	0.790	0.86708861	0.619
	24	0.510	0.615	0.82926829	0.813
	36	0.356	0.456	0.78070175	1.075
	48	0.272	0.376	0.72340426	1.406
	54	0.242	0.342	0.70760234	1.502
802.11n_20 MHz BW	6.5	1.861	1.966	0.94659207	0.238
	13	0.941	1.047	0.89875836	0.464
	19.5	0.625	0.738	0.84688347	0.722
	26	0.483	0.591	0.81725888	0.876
	39	0.333	0.435	0.76551724	1.160
	52	0.252	0.351	0.71794872	1.439
	58.5	0.225	0.330	0.68181818	1.663
	65	0.204	0.306	0.66666667	1.761
802.11n_40 MHz BW	13.5	0.910	1.022	0.89041096	0.504
	27	0.464	0.572	0.81118881	0.909
	40.5	0.314	0.422	0.74407583	1.284
	54	0.241	0.348	0.69252874	1.596
	81	0.166	0.276	0.60144928	2.208
	108	0.128	0.235	0.54468085	2.639
	121.5	0.116	0.223	0.52017937	2.838
	135	0.108	0.215	0.50232558	2.990


Mode	Data Rate	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11ac_20 MHz BW	6.5	0.972	1.074	0.90502793	0.433
	13	0.507	0.606	0.83663366	0.775
	19.5	0.351	0.449	0.78173719	1.069
	26	0.276	0.374	0.73796791	1.320
	39	0.195	0.294	0.66326531	1.783
	52	0.159	0.258	0.61627907	2.102
	58.5	0.144	0.242	0.59504132	2.255
	65	0.136	0.234	0.58119658	2.357
	78	0.120	0.218	0.55045872	2.593
5.8 GHz Band 802.11ac_40 MHz BW	13.5	0.490	0.592	0.82770270	0.821
	27	0.267	0.367	0.72752044	1.382
	40.5	0.192	0.291	0.65979381	1.806
	54	0.154	0.255	0.60392157	2.190
	81	0.115	0.215	0.53488372	2.717
	108	0.100	0.200	0.50000000	3.010
	121.5	0.092	0.191	0.48167539	3.172
	135	0.088	0.187	0.47058824	3.274
	162	0.079	0.179	0.44134078	3.552
5.8 GHz Band 802.11ac_80 MHz BW	29.3	0.247	0.347	0.71181556	1.476
	58.5	0.142	0.244	0.58196721	2.351
	87.8	0.111	0.212	0.52358491	2.810
	117	0.092	0.192	0.47916667	3.195
	175.5	0.075	0.176	0.42613636	3.705
	234	0.067	0.168	0.39880952	3.992
	263.3	0.063	0.164	0.38414634	4.155
	292.5	0.062	0.165	0.37575758	4.251
	351	0.059	0.160	0.36875000	4.333
390	0.056	0.156	0.35897436	4.449	

8.2 26 dB BANDWIDTH MEASUREMENT

The bandwidth at 26 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum power control level, as defined in KDB 789033(issued 04/08/2013), at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26 dB bandwidth.

The 26 dB bandwidth is used to determine the conducted power limits.

TEST CONFIGURATION

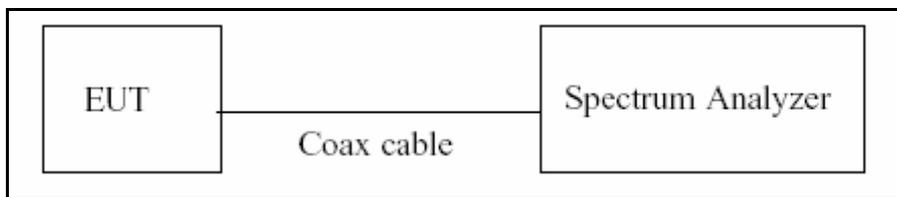

TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to(Page 3 in KDB 789033, issued 04/08/2013)

1. RBW = approximately 1 % of the emission bandwidth
2. VBW > RBW
3. Detector = Peak
4. Trace mode = max hold
5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1 %.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNF0855P



TEST RESULTS

20 MHz BW

Conducted 26 dB Bandwidth Measurements for 802.11a

802.11a Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5180	36	21.69	N/A	Pass
5200	40	22.10	N/A	Pass
5240	48	21.52	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11a

802.11a Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5260	52	21.77	N/A	Pass
5300	60	21.82	N/A	Pass
5320	64	21.71	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11a

802.11a Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5500	100	22.02	N/A	Pass
5580	116	22.03	N/A	Pass
5700	140	21.43	N/A	Pass



Conducted 26 dB Bandwidth Measurements for 802.11n

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5180	36	21.93	N/A	Pass
5200	40	22.27	N/A	Pass
5240	48	22.38	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11n

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5260	52	22.34	N/A	Pass
5300	60	21.92	N/A	Pass
5320	64	22.01	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11n

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5500	100	22.19	N/A	Pass
5580	116	22.18	N/A	Pass
5700	140	22.53	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11ac

802.11ac Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5180	36	21.86	N/A	Pass
5200	40	21.86	N/A	Pass
5240	48	21.70	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11ac

802.11ac Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5260	52	21.69	N/A	Pass
5300	60	21.72	N/A	Pass
5320	64	22.57	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11ac

802.11ac Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5500	100	21.88	N/A	Pass
5580	116	21.94	N/A	Pass
5700	140	21.92	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11n

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5190	38	43.55	N/A	Pass
5230	46	42.17	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11n

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5270	54	42.16	N/A	Pass
5310	62	42.95	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11n

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5510	102	42.36	N/A	Pass
5550	110	42.63	N/A	Pass
5670	134	42.58	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11ac

802.11ac Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5190	38	41.92	N/A	Pass
5230	46	42.09	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11ac

802.11ac Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5270	54	42.14	N/A	Pass
5310	62	41.97	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11ac

802.11ac Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5510	102	42.46	N/A	Pass
5550	110	42.06	N/A	Pass
5670	134	42.07	N/A	Pass

80 MHz BW

Conducted 26 dB Bandwidth Measurements for 802.11ac

802.11ac Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5210	42	83.84	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11ac

802.11ac Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5290	58	83.19	N/A	Pass

Conducted 26 dB Bandwidth Measurements for 802.11ac

802.11ac Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5530	106	83.49	N/A	Pass
5690	138	83.32	N/A	Pass

Note :

1. In order to simplify the report, attached plots were only the most wide channel.
2. We applied the 15.407 for Ch.144, 142 and 138 in 802.11ac according to KDB 644545 D01 v01r01.



20 dB BW TEST RESULTS(Additional Test)

Conducted 20 dB Bandwidth Measurements for 802.11a

802.11a Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5240	48	19.51	N/A	Pass
5260	52	19.91	N/A	Pass

Conducted 20 dB Bandwidth Measurements for 802.11n_20 MHz BW

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5240	48	19.52	N/A	Pass
5260	52	19.88	N/A	Pass

Conducted 20 dB Bandwidth Measurements for 802.11ac_20 MHz BW

802.11ac Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5240	48	19.87	N/A	Pass
5260	52	19.80	N/A	Pass

Conducted 20 dB Bandwidth Measurements for 802.11n_40 MHz BW

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5230	46	39.08	N/A	Pass
5270	54	39.45	N/A	Pass

Conducted 20 dB Bandwidth Measurements for 802.11ac_40 MHz BW

802.11ac Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5230	46	39.14	N/A	Pass
5270	54	38.84	N/A	Pass



Conducted 20 dB Bandwidth Measurements for 802.11ac_80 MHz BW

802.11ac Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5290	58	79.35	N/A	Pass
5530	106	79.05	N/A	Pass

Note : We performed the 20 dB BW test for highest channel in UNII1 band and lowest channel in UNII2 band to prove that no part of the fundamental emissions of any UNII1 and UNII2 band signals lies within the each band. Also, we performed the 20 dB BW test to prove that no part of the fundamental emissions of any channel 132 and 134 signal lies within the TDWR band. And 2C band signal lies within the frequency range 5600-5650 MHz(Terminal Doppler Weather Radars (TDWRs)) according to KDB 443999 D01 v01 and KDB 644545 D01 v01r01

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



20 dB BW TEST RESULTS(Additional Test)

Conducted 20 dB Bandwidth Measurements for 802.11a

802.11a Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5660	132	19.70	N/A	Pass

Conducted 20 dB Bandwidth Measurements for 802.11n_20 MHz BW

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5660	132	19.79	N/A	Pass

Conducted 20 dB Bandwidth Measurements for 802.11ac_20 MHz BW

802.11ac Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5660	132	19.86	N/A	Pass

Conducted 20 dB Bandwidth Measurements for 802.11n_40 MHz BW

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5670	134	39.28	N/A	Pass

Conducted 20 dB Bandwidth Measurements for 802.11ac_40 MHz BW

802.11ac Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5670	134	38.63	N/A	Pass



Conducted 20 dB Bandwidth Measurements for 802.11ac_80 MHz BW

802.11ac Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5690	138	79.28	N/A	Pass


Note : We performed the 20 dB BW test to prove that no part of the fundamental emissions of any UNII 2C band signal lies within the frequency range 5600-5650 MHz(Terminal Doppler Weather Radars (TDWRs)) according to KDB 443999 D01 v01 and KDB 644545 D01 v01r01

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P




RESULT PLOTS
20 MHz BW

26 dB Bandwidth plot (802.11a-CH 40)

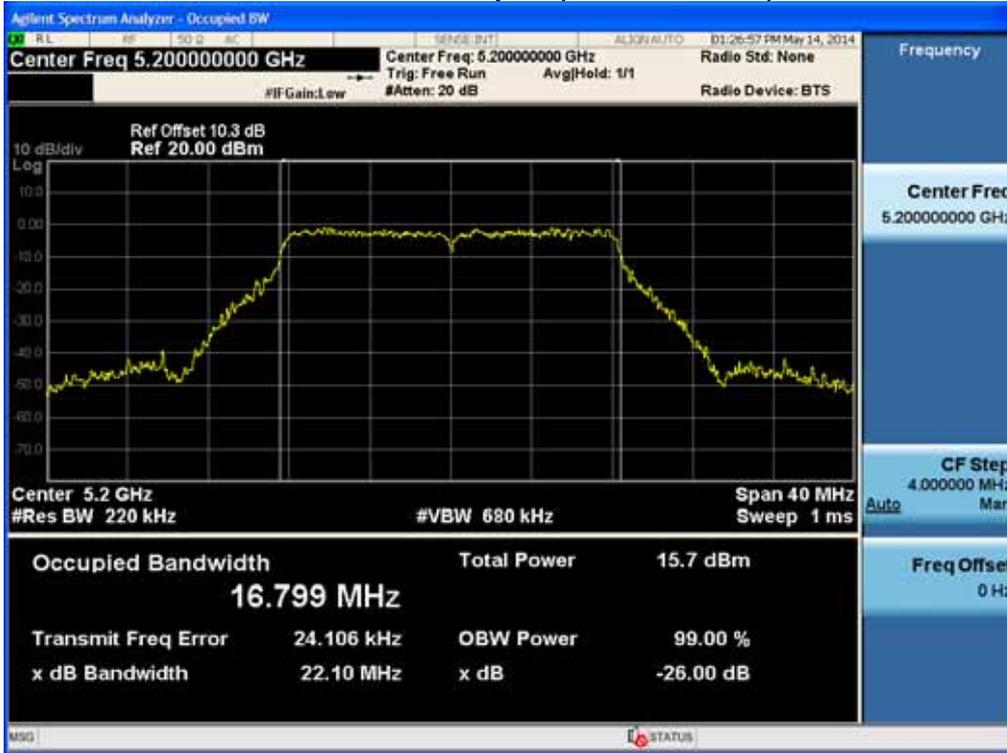


26 dB Bandwidth plot (802.11a-CH 60)

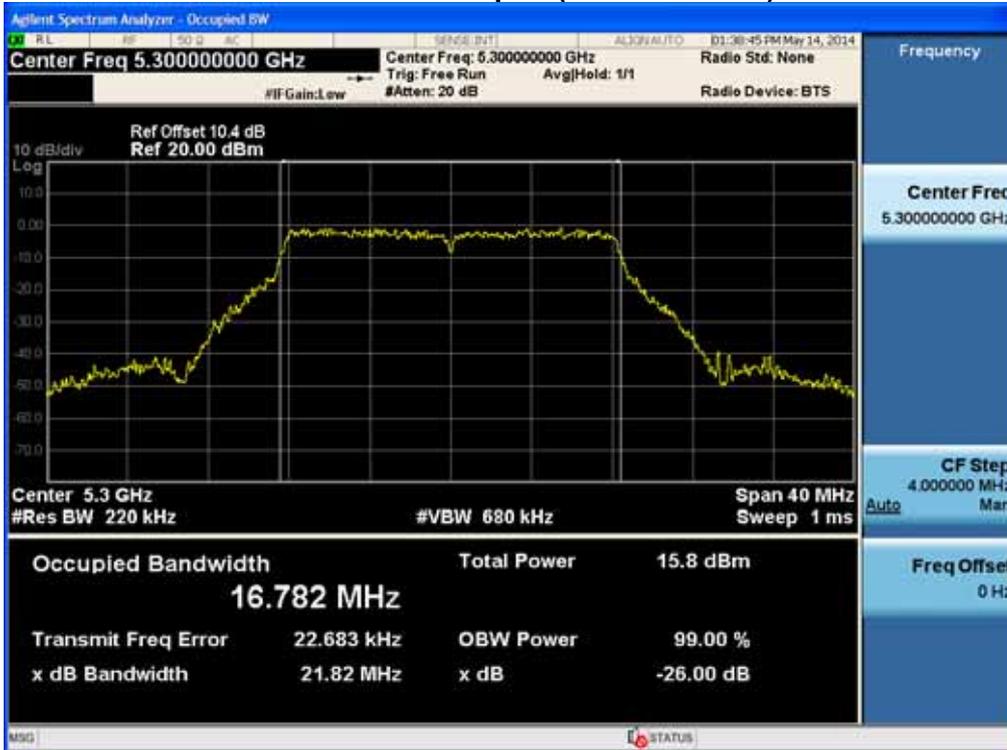


FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P

26 dB Bandwidth plot (802.11a-CH 116)

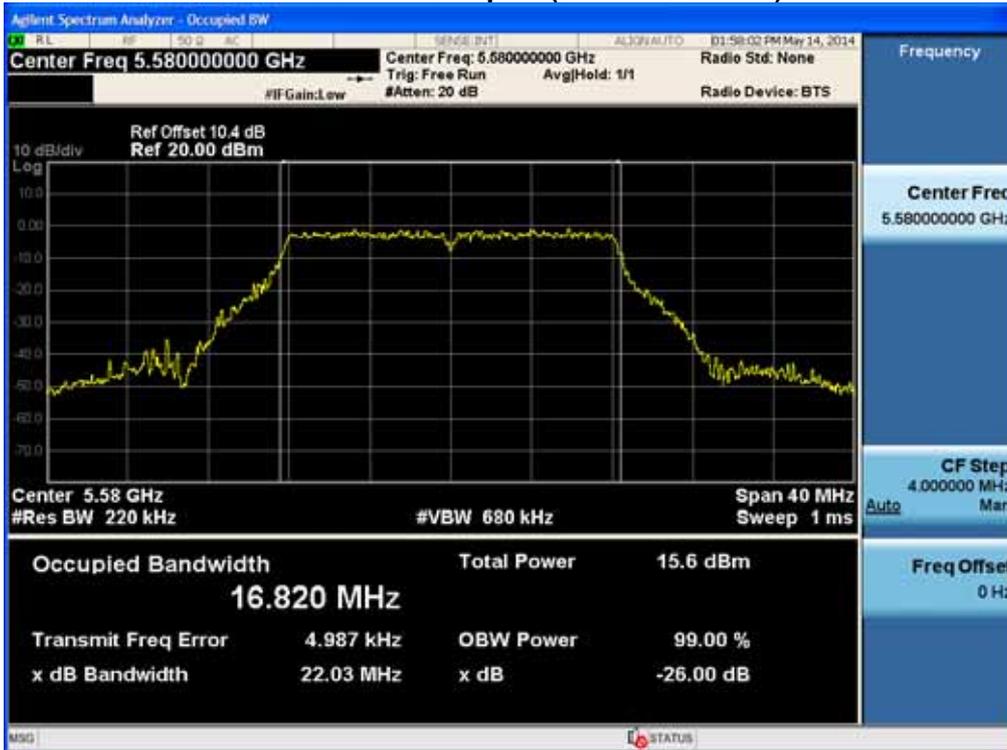


26 dB Bandwidth plot (802.11n-CH 48)

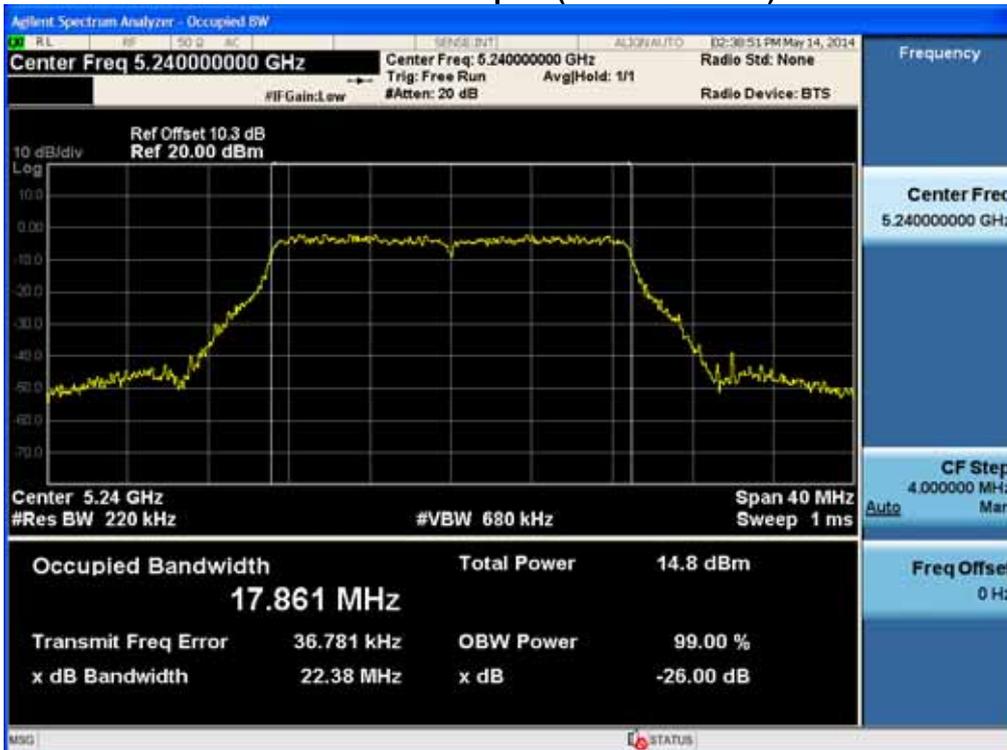


FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P

26 dB Bandwidth plot (802.11n-CH 52)

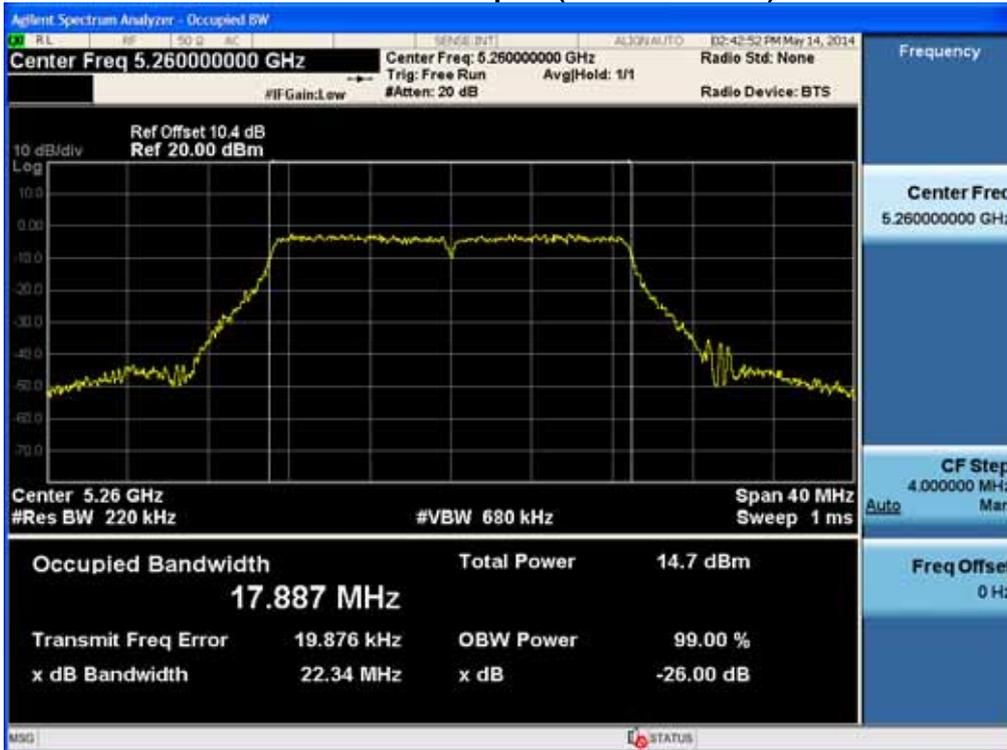


26 dB Bandwidth plot (802.11n-CH 140)

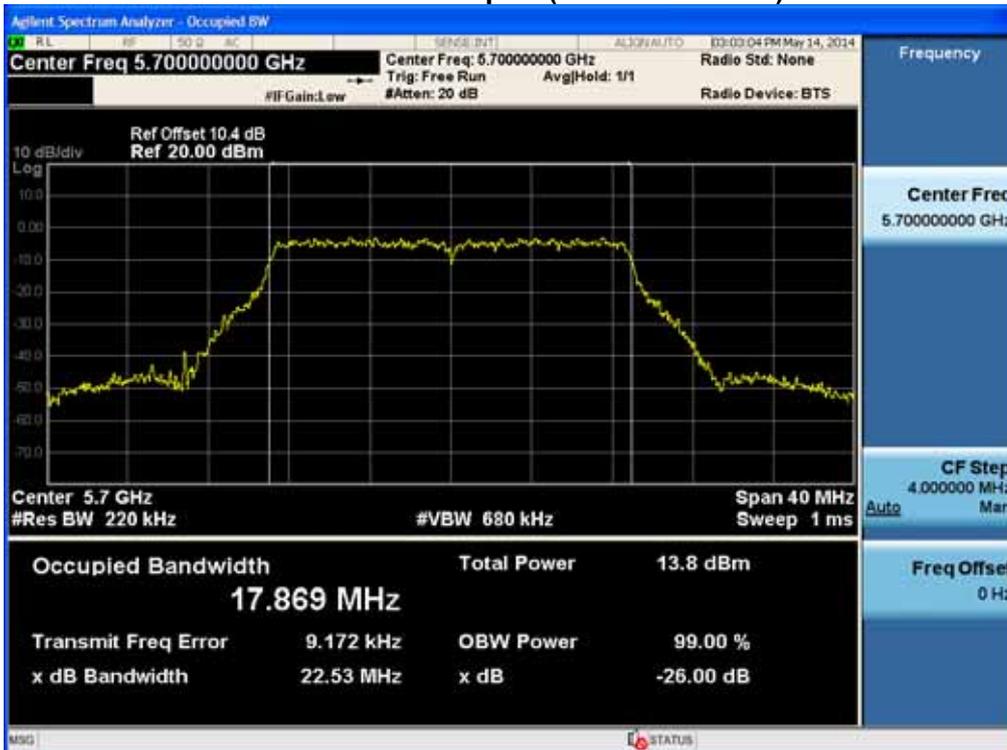


FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P


26 dB Bandwidth plot (802.11ac-CH 36)

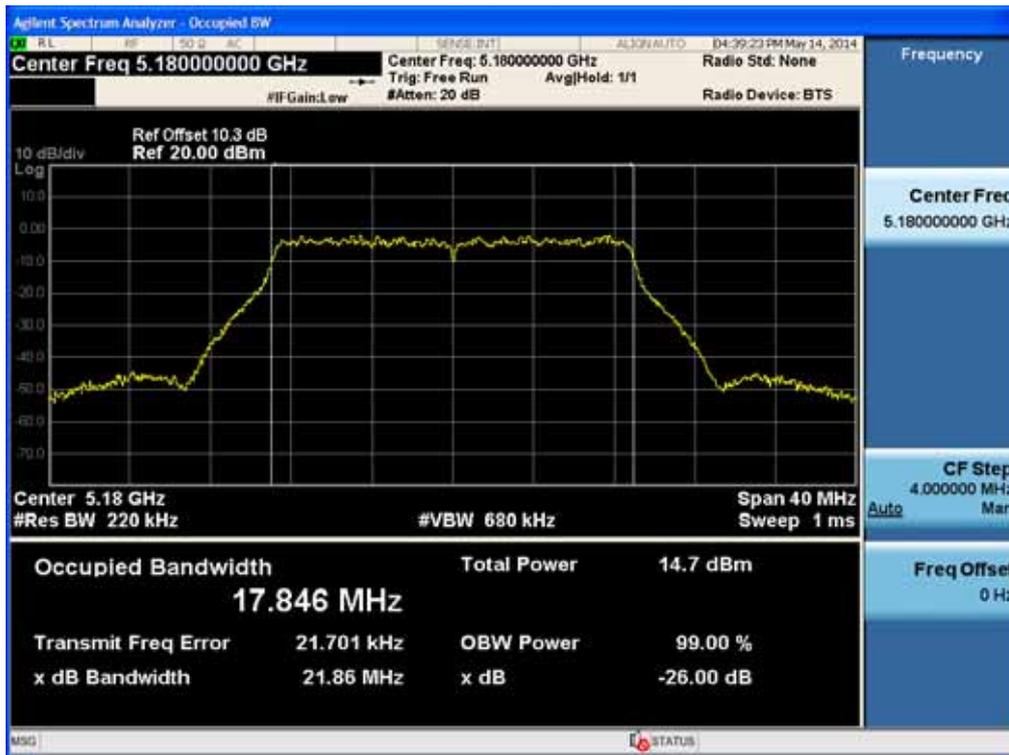

26 dB Bandwidth plot (802.11ac-CH 64)

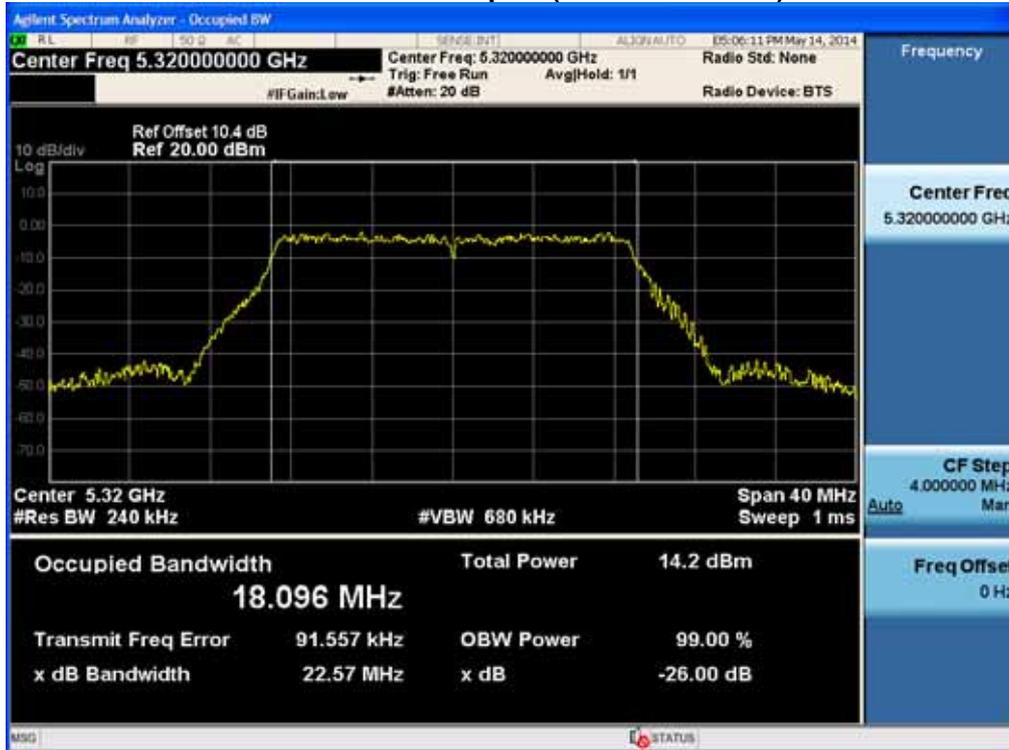


26 dB Bandwidth plot (802.11ac-CH 116)

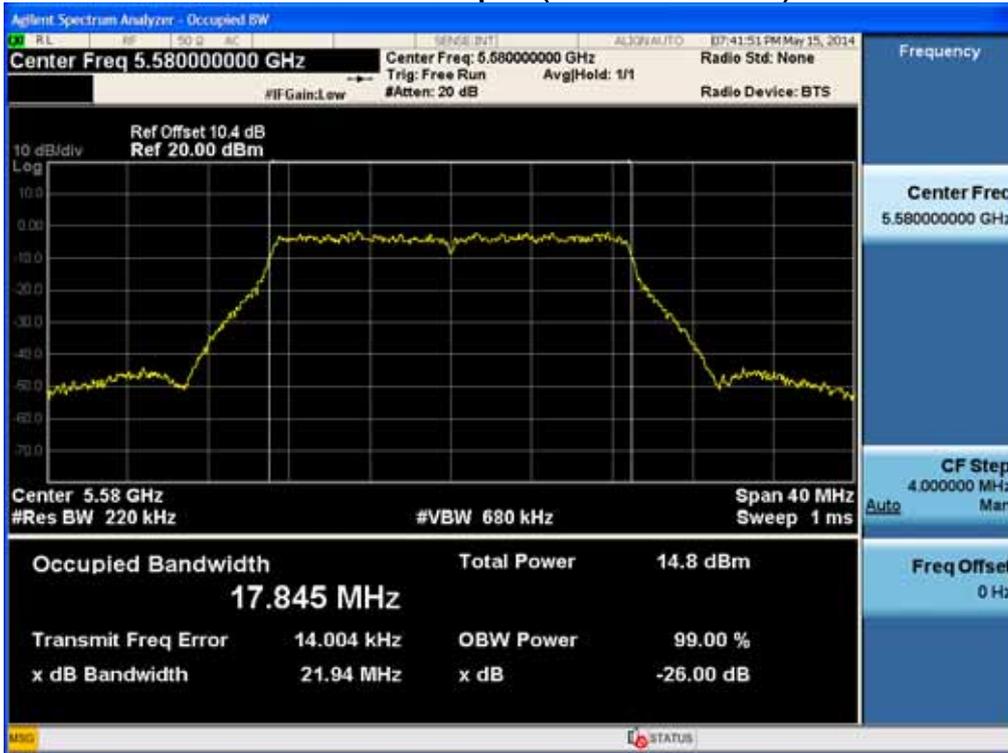


FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P	


26 dB Bandwidth plot (802.11n-CH 38)

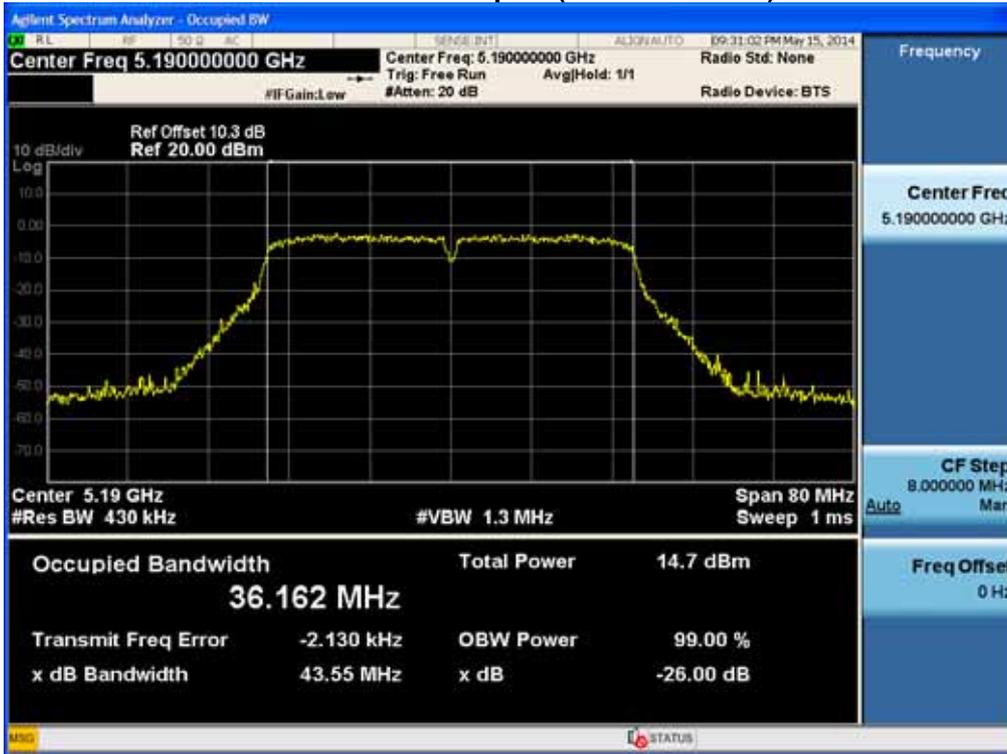


26 dB Bandwidth plot (802.11n-CH 62)

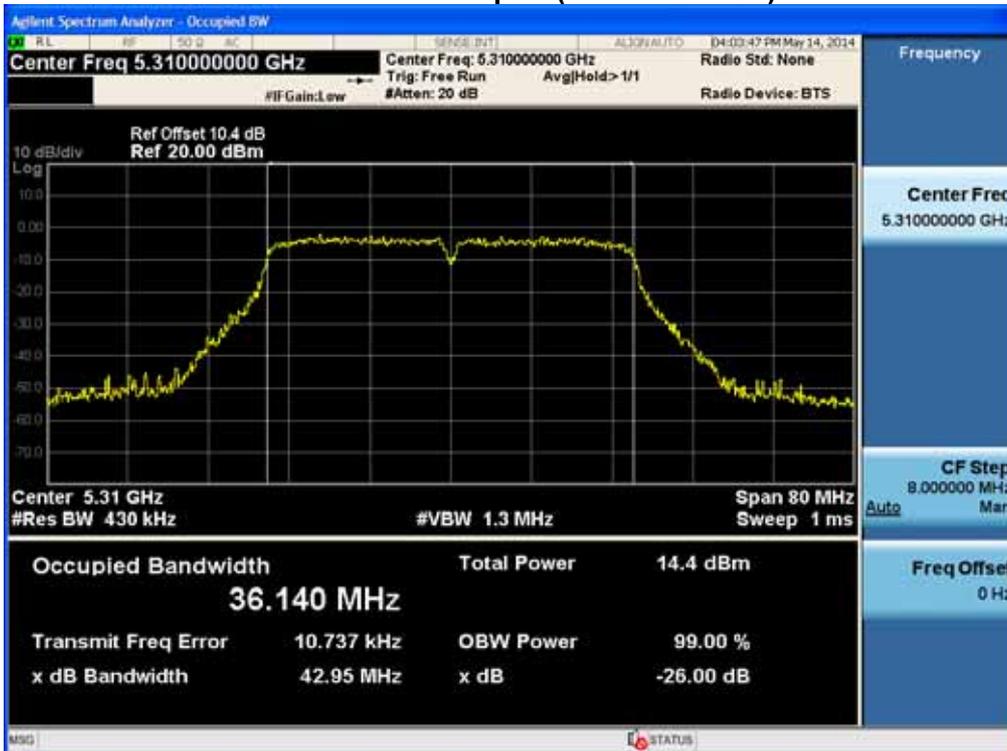

26 dB Bandwidth plot (802.11n-CH 110)

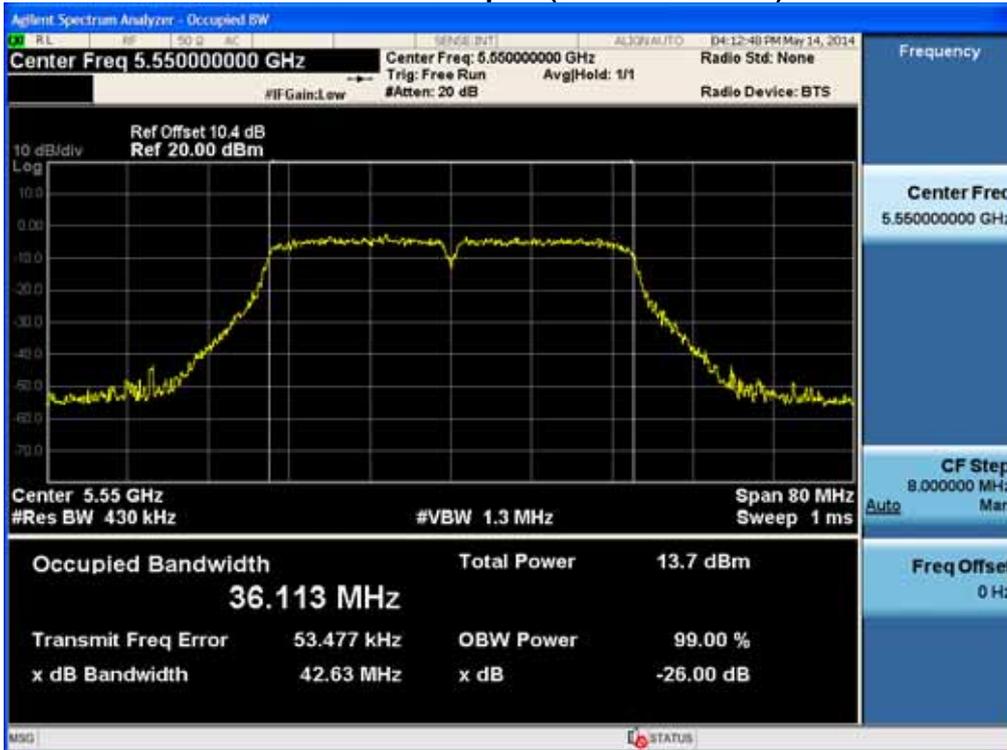


26 dB Bandwidth plot (802.11ac-CH 46)

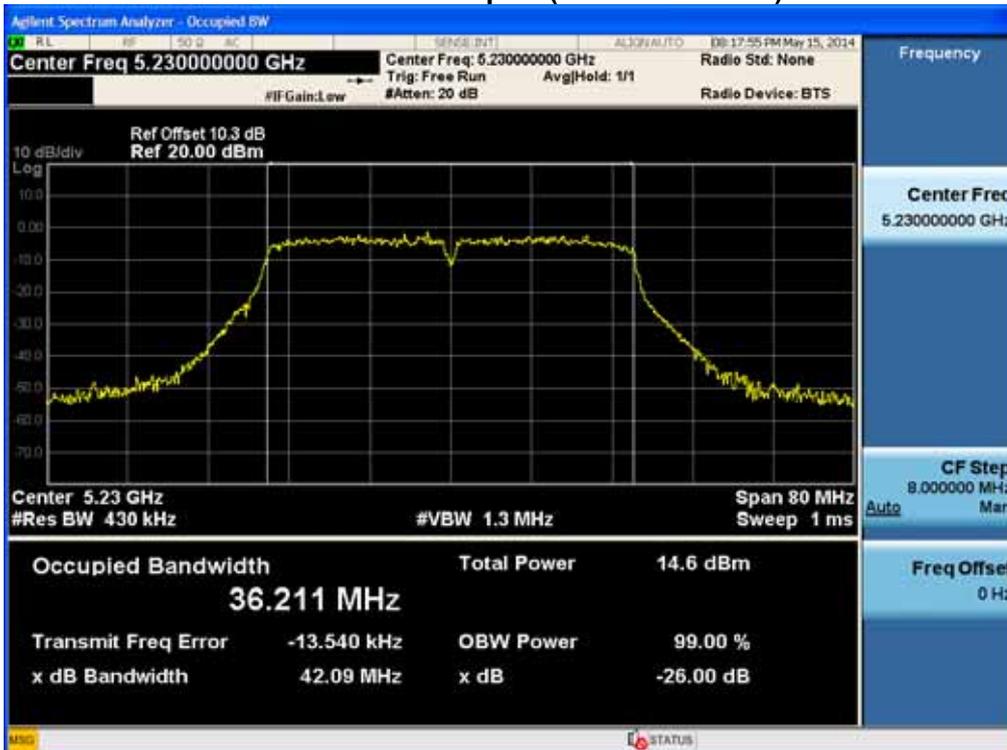


FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P

26 dB Bandwidth plot (802.11ac-CH 54)

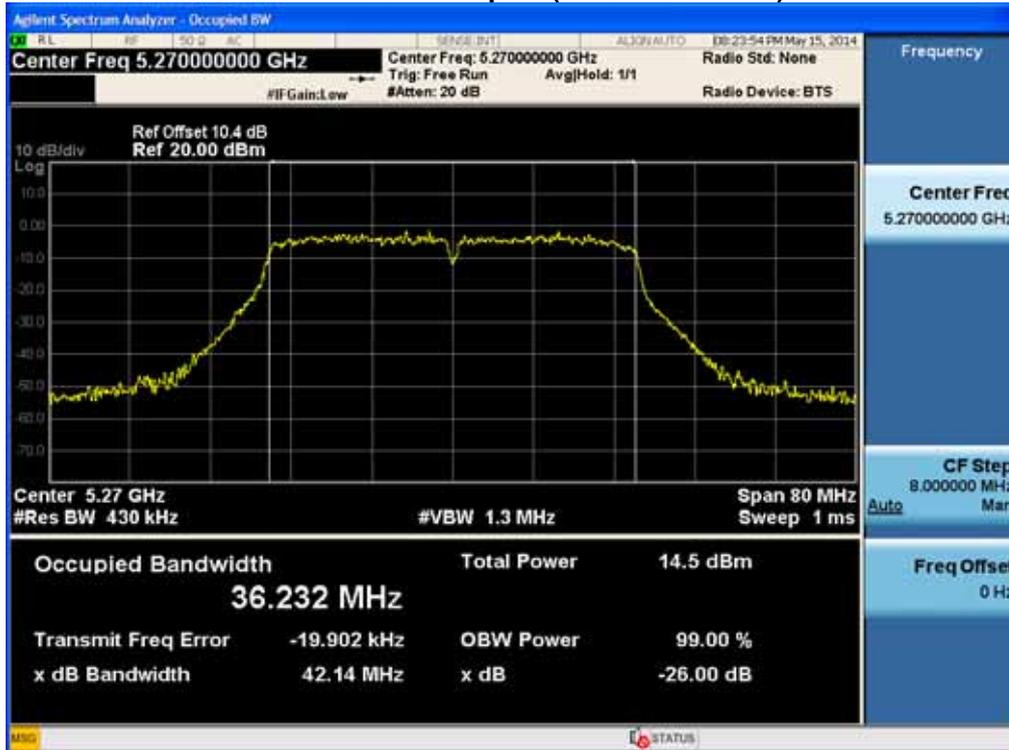


26 dB Bandwidth plot (802.11ac-CH 102)

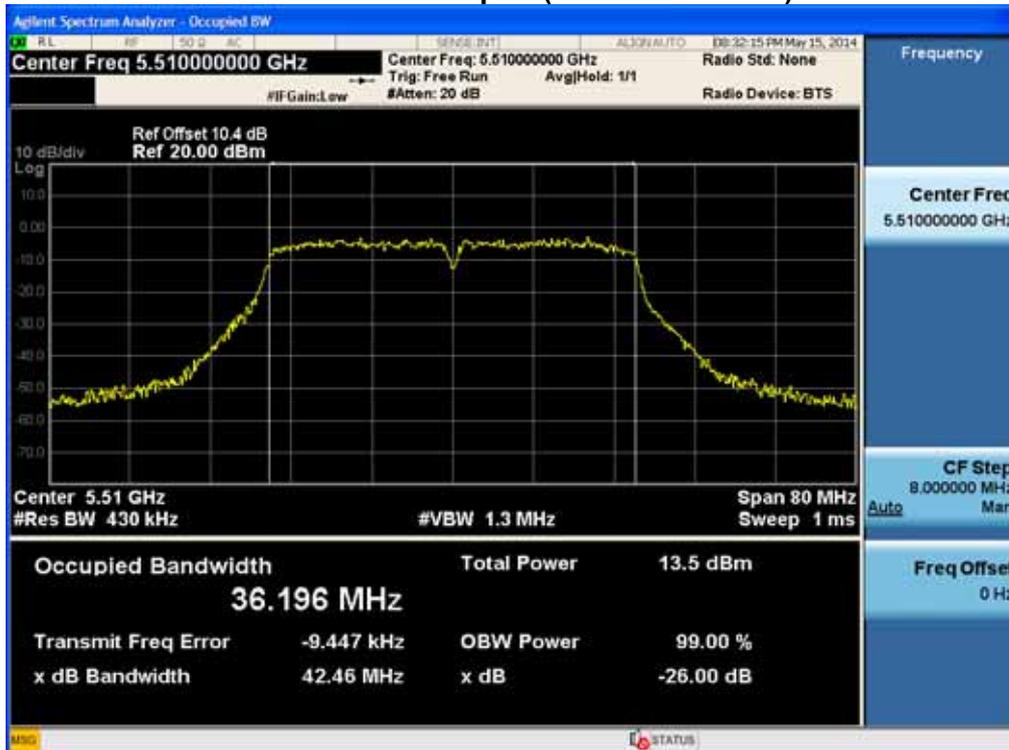


FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P


26 dB Bandwidth plot (802.11ac-CH 42)

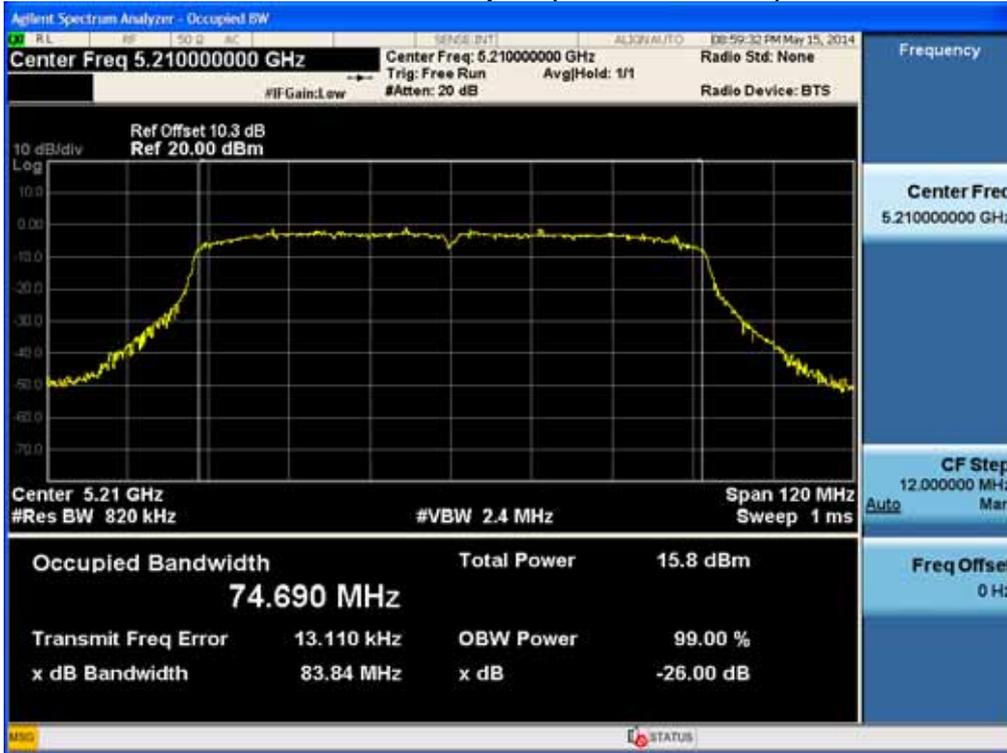

26 dB Bandwidth plot (802.11ac-CH 58)

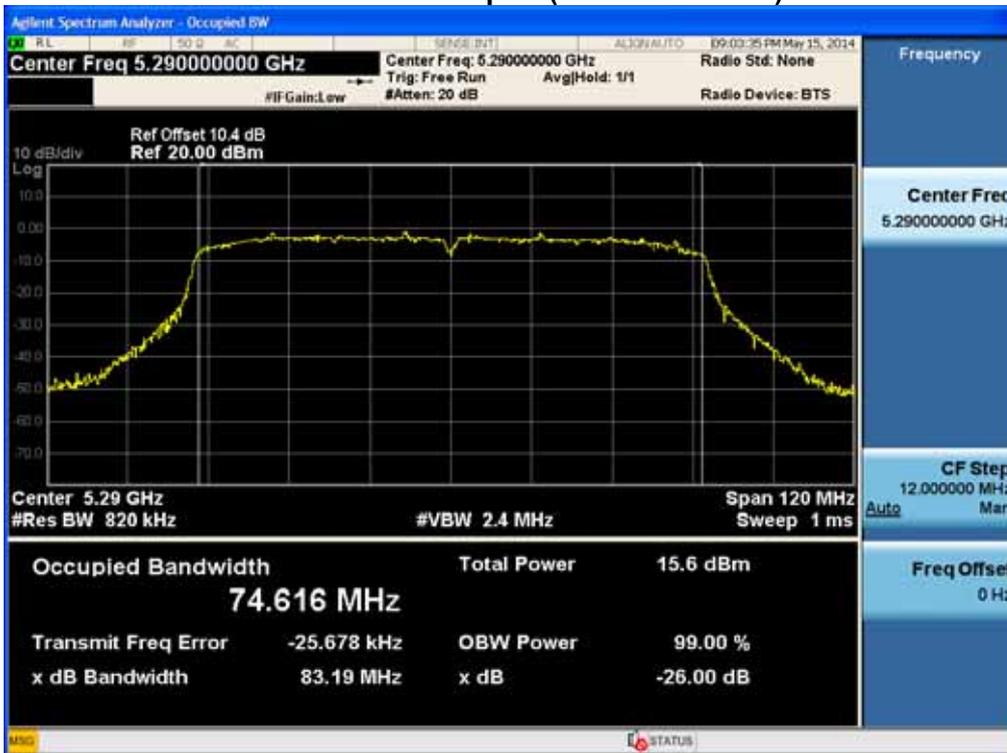

26 dB Bandwidth plot (802.11ac-CH 106)

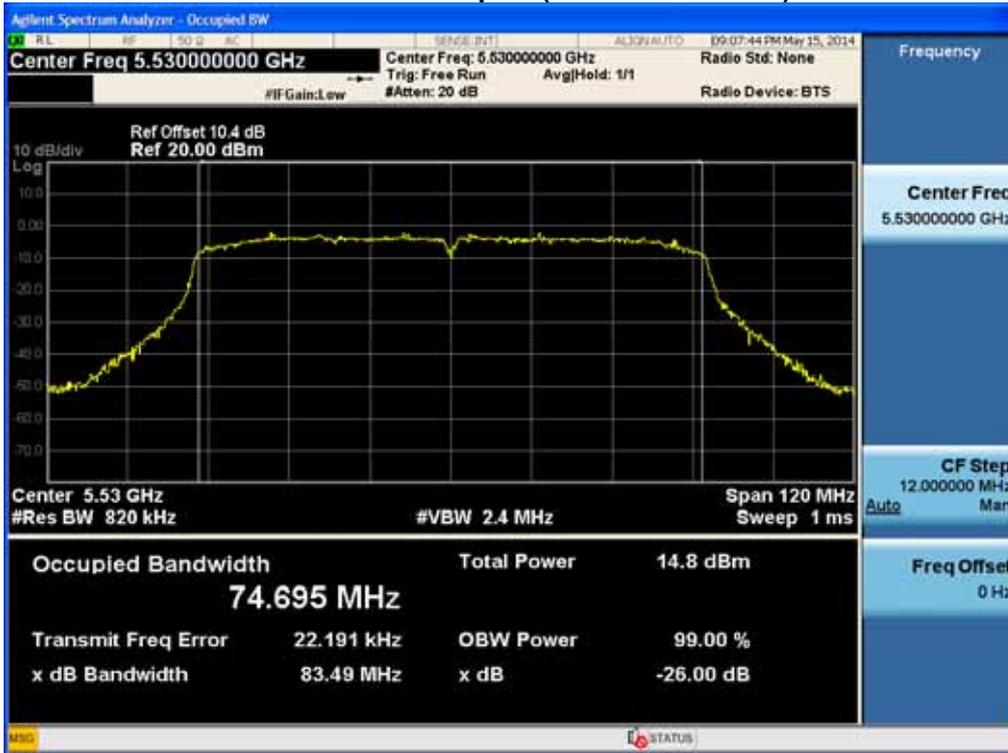


FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P	

RESULT PLOTS(20 dB Bandwidth)

20 dB Bandwidth plot (802.11a-CH 48)



20 dB Bandwidth plot (802.11a-CH 52)

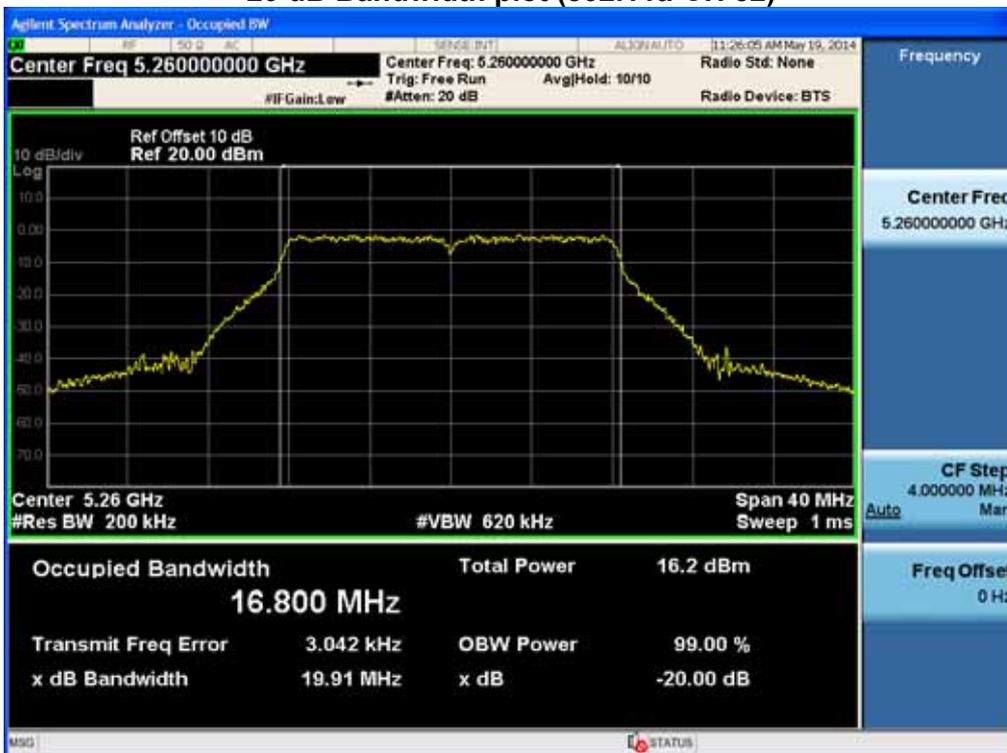


20 dB Bandwidth plot (802.11n-CH 48)




20 dB Bandwidth plot (802.11n-CH 52)




20 dB Bandwidth plot (802.11ac-CH 48)

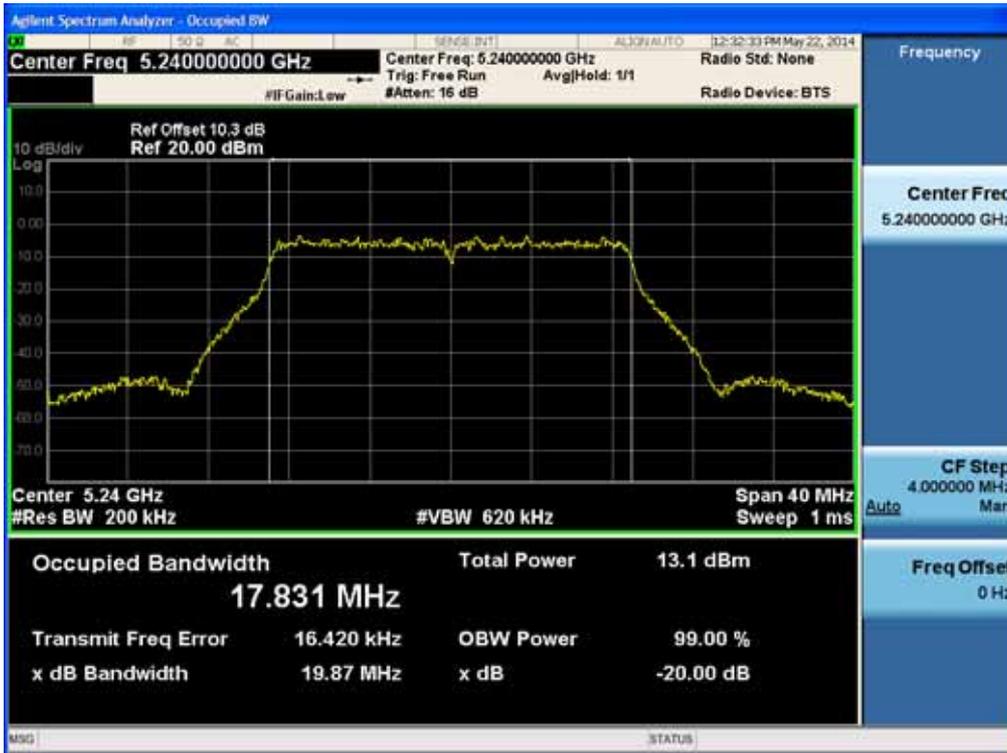


20 dB Bandwidth plot (802.11ac-CH 52)

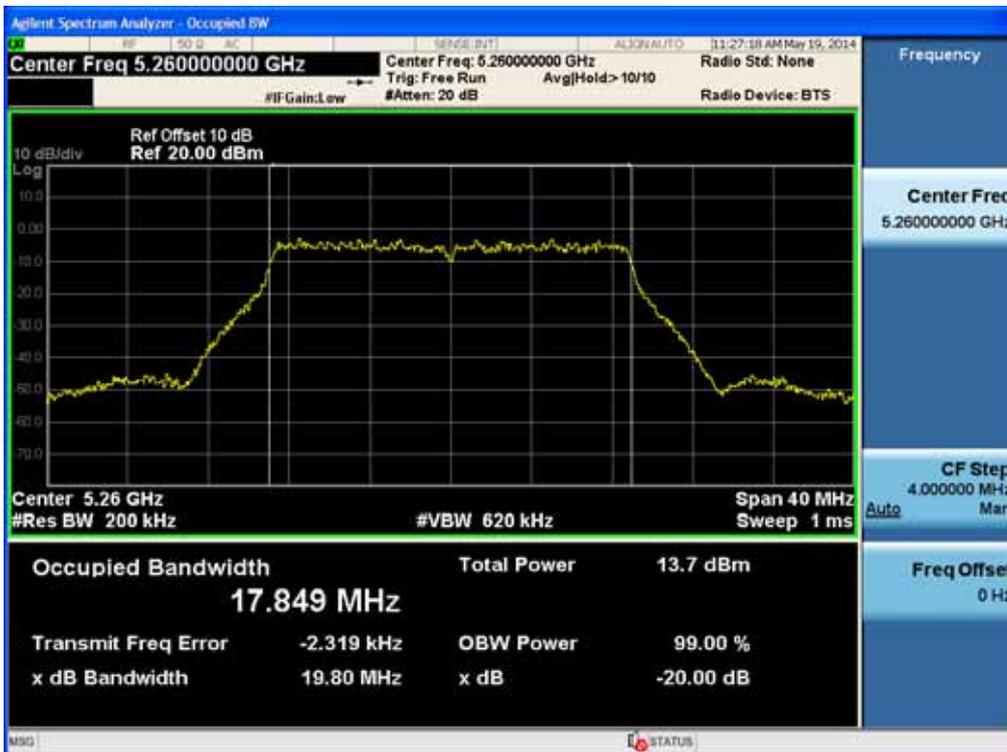

20 dB Bandwidth plot (802.11n_40 MHz BW-CH 46)

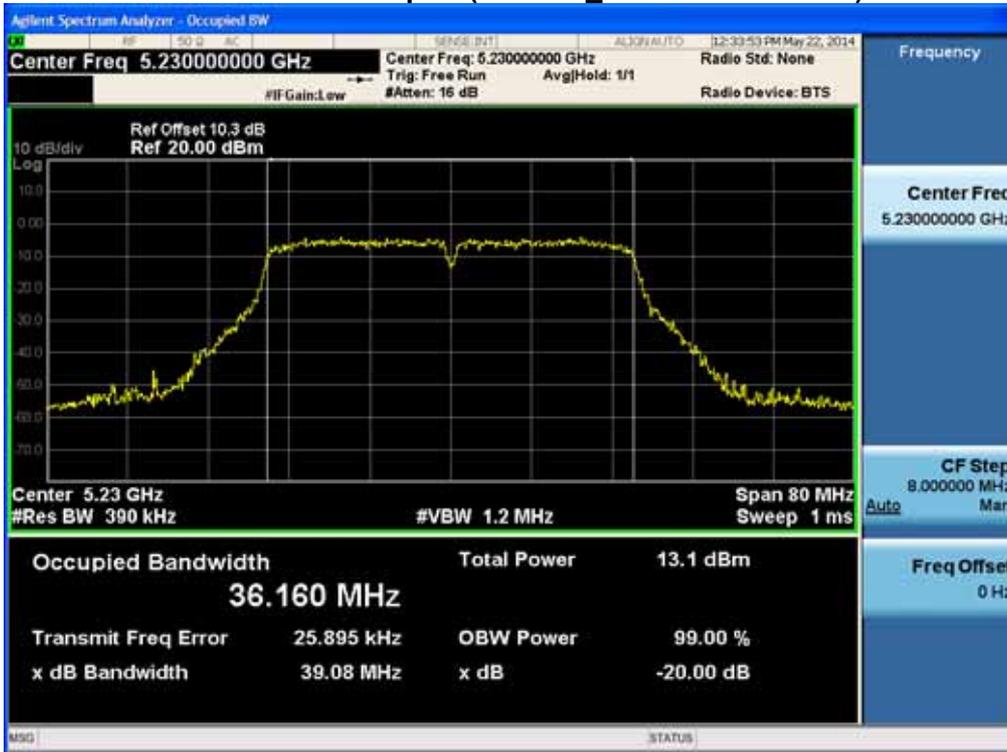


20 dB Bandwidth plot (802.11n_40 MHz BW-CH 54)

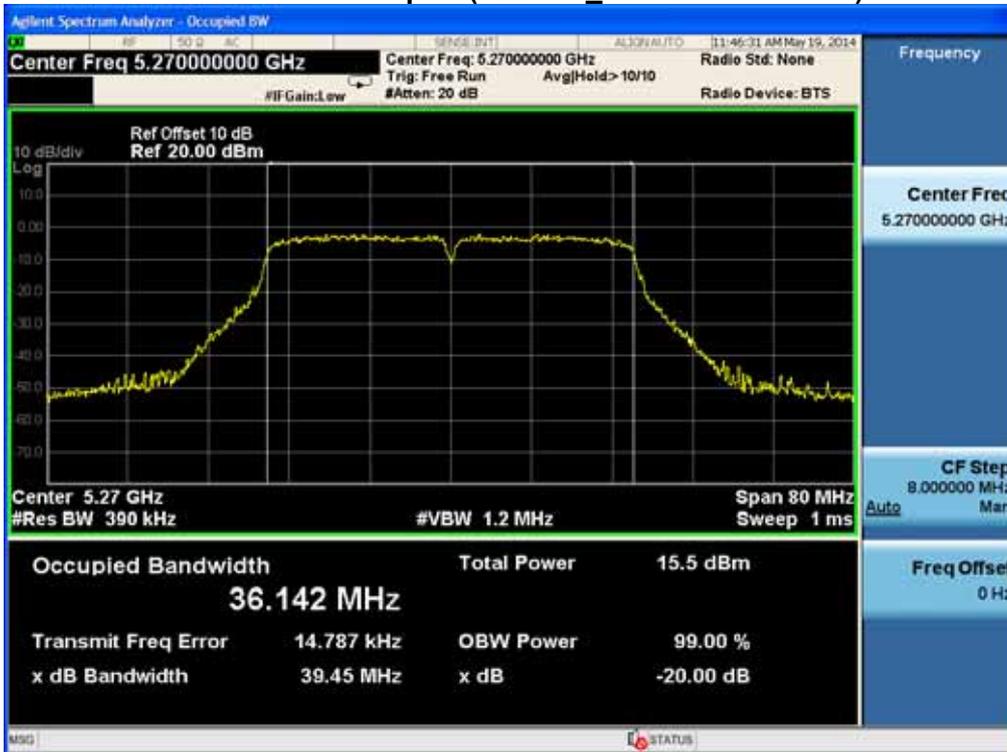


20 dB Bandwidth plot (802.11ac_40 MHz BW-CH 46)




20 dB Bandwidth plot (802.11ac_40 MHz BW-CH 54)

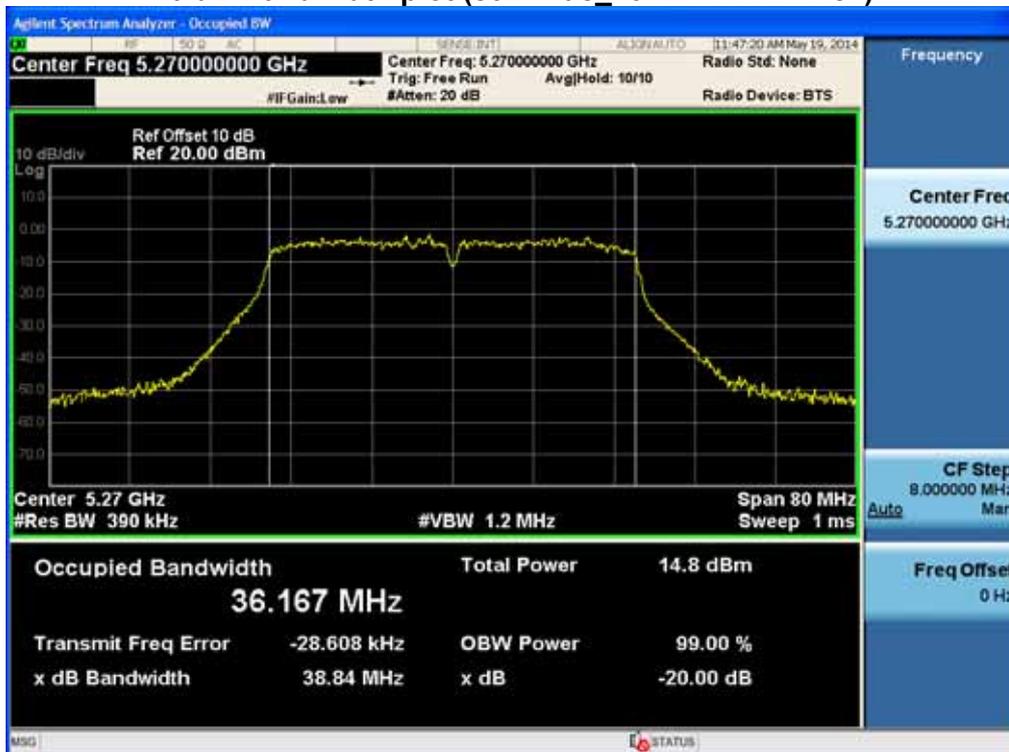


20 dB Bandwidth plot (802.11ac_80 MHz BW-CH 42)

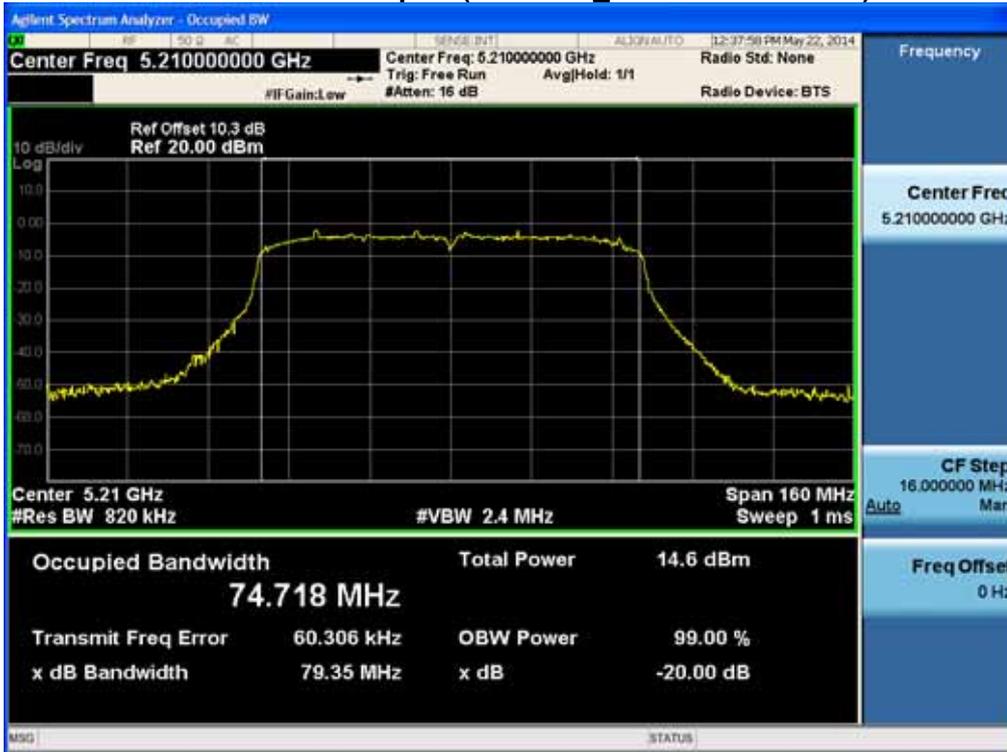


20 dB Bandwidth plot (802.11ac_80 MHz BW-CH 58)

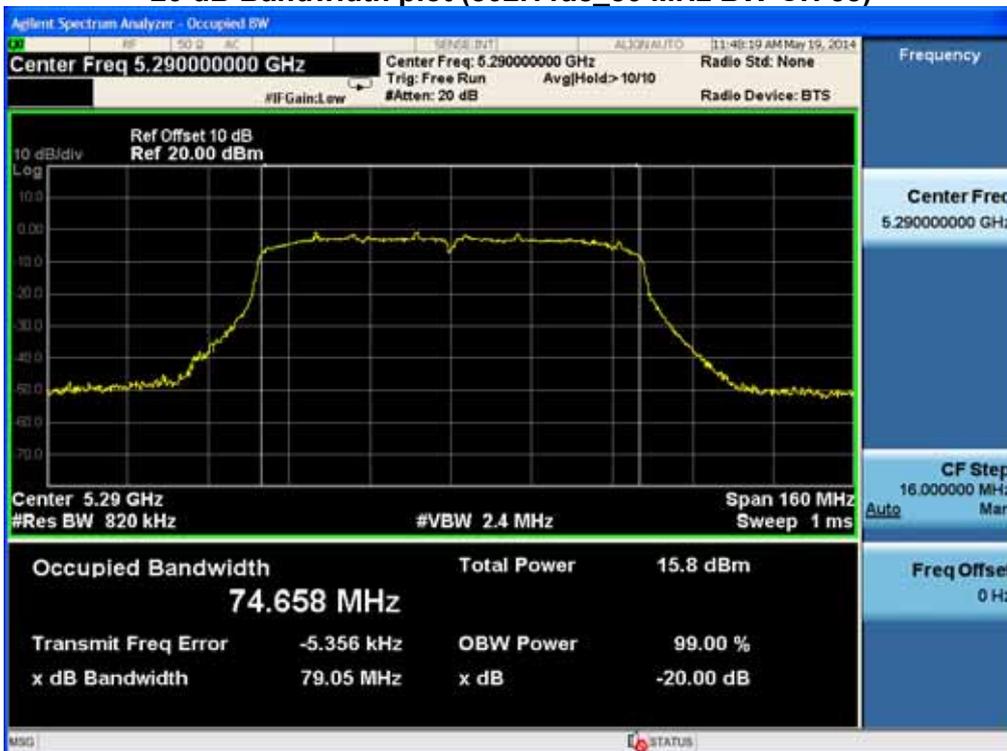


20 dB Bandwidth plot (802.11a-CH 132)

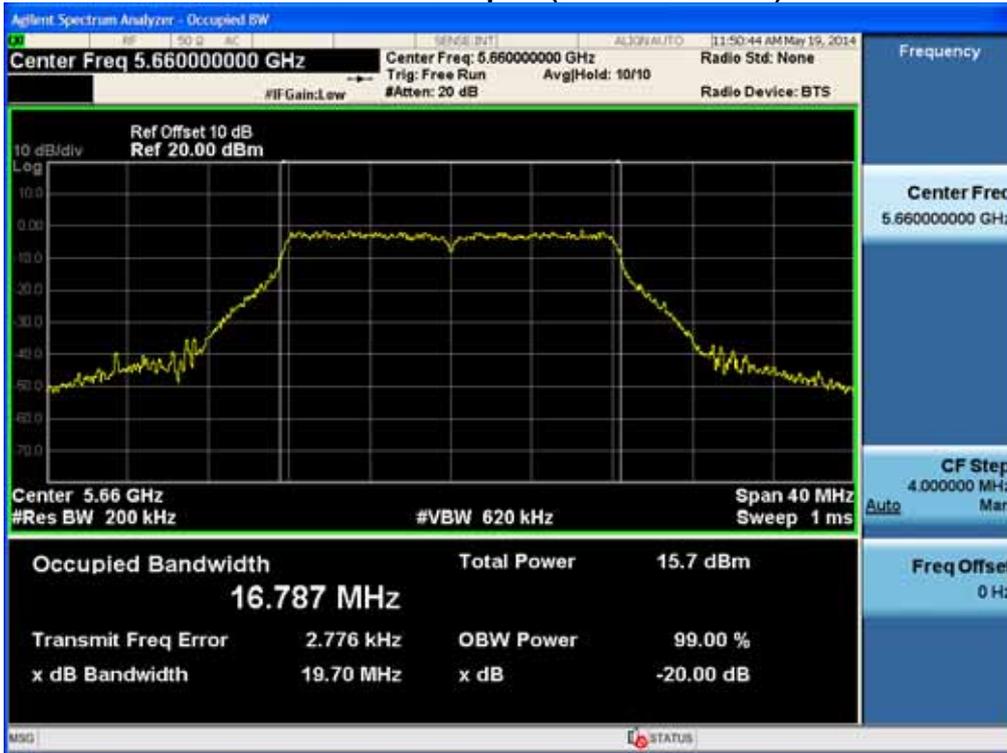


20 dB Bandwidth plot (802.11n-CH 132)

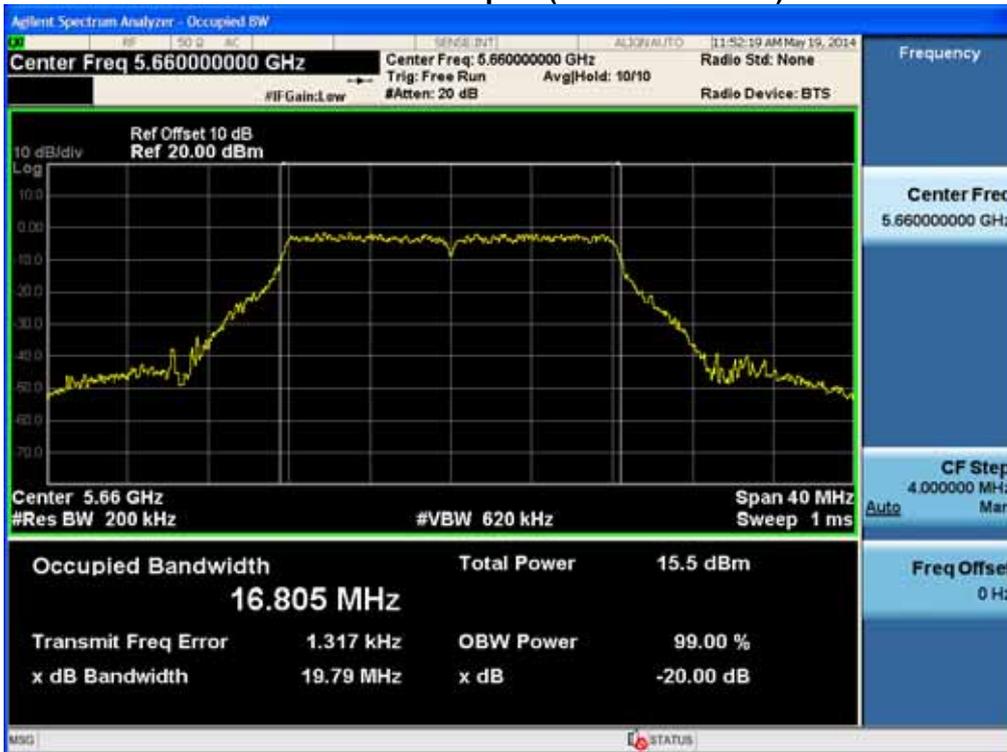

20 dB Bandwidth plot (802.11ac-CH 132)

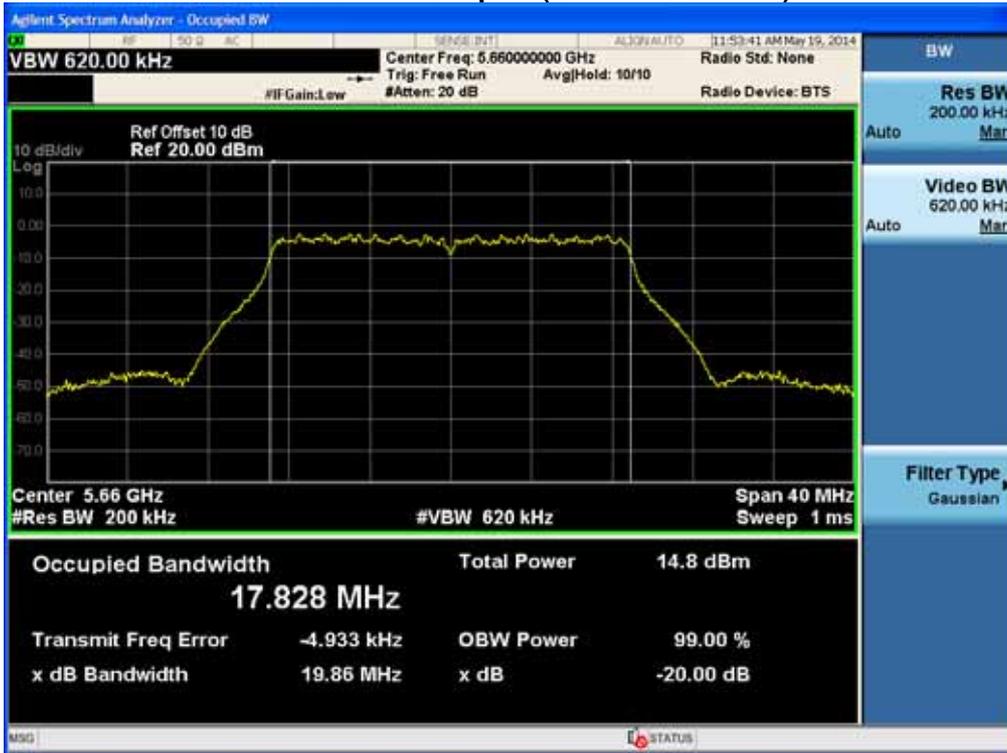

20 dB Bandwidth plot (802.11n_40 MHz BW-CH 134)

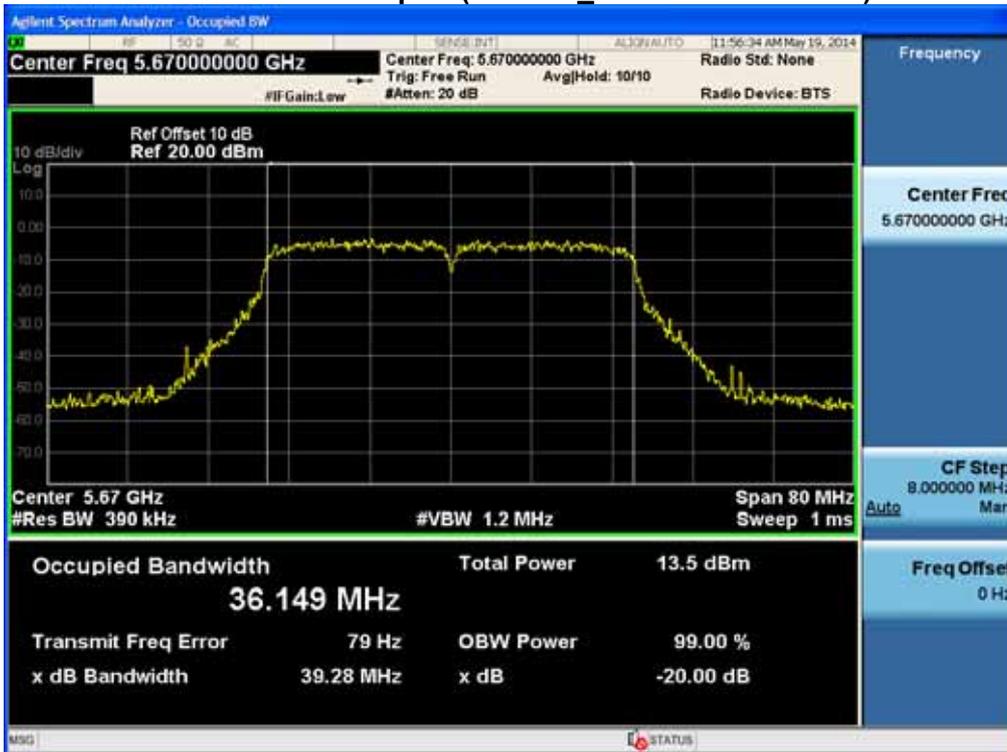

20 dB Bandwidth plot (802.11ac_40 MHz BW-CH 134)



20 dB Bandwidth plot (802.11ac_80 MHz BW-CH 138)



8.3 OUTPUT POWER MEASUREMENT

Test Requirements and limit, §15.247(b)(3)

A transmitter antenna terminal of EUT is connected to the input of a Spectrum Analyzer. Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies. In the 5.15 – 5.25 GHz band, the maximum permissible conducted output power is the lesser of 50 mW ((16.99 dBm) and $4 \text{ dBm} + 10 \log_{10} (26 \text{ dB BW})$ frequencies. In the 5.25 – 5.35 GHz band, the maximum permissible conducted output power is the lesser of 250 mW (23.98 dBm) and $11 \text{ dBm} + 10 \log_{10} (26 \text{ dB BW})$ frequencies. In the 5.47 – 5.725 GHz band, the maximum permissible conducted output power is the lesser of 250 mW (23.98 dBm) and $11 \text{ dBm} + 10 \log_{10} (26 \text{ dB BW})$

Limit : 802.11a_UNII-1 = 16.99 dBm

802.11n_UNII-1_20 MHz BW = 16.99 dBm

802.11n_UNII-1_40 MHz BW = 16.99 dBm

802.11ac_UNII-1_20 MHz BW =16.99 dBm

802.11ac_UNII-1_40 MHz BW =16.99 dBm

802.11ac_UNII-1_80 MHz BW =16.99 dBm

802.11a_UNII-2 = 23.98 dBm

802.11n_UNII-2_20 MHz BW = 23.98dBm

802.11n_UNII-2_40 MHz BW = 23.98 dBm

802.11ac_UNII-2_20 MHz BW =23.98 dBm

802.11ac_UNII-2_40 MHz BW =23.98 dBm

802.11ac_UNII-2_80 MHz BW =23.98 dBm

802.11a_UNII-2e = 23.98dBm

802.11n_UNII-2e_20 MHz BW = 23.98 dBm

802.11n_UNII-2e_40 MHz BW = 23.98 dBm


802.11ac_UNII-2e_20 MHz BW =23.98 dBm

802.11ac_UNII-2e_40 MHz BW =23.98 dBm

802.11ac_UNII-2e_80 MHz BW =23.98 dBm

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P	

TEST CONFIGURATION(20 MHz BW)

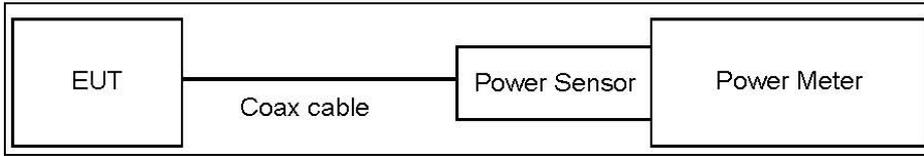

TEST PROCEDURE(20 MHz BW)

We tested according to Method E)3)a) in KDB 789033(issued 04/08/2013).

▪ Average Power

1. Measure the duty cycle.
2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
3. Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Note :


1. We apply to the offset in the 5.2 GHz, 5.3 GHz and 5.6 GHz range that was rounded off to the closest tenth dB. Actual value of loss for the attenuator and cable combination is below table.

Band	Frequency(MHz)	Loss(dB)
UNII 1	5180	20.30
	5190	20.29
	5200	20.28
	5230	20.29
	5240	20.34
UNII 2	5260	20.37
	5270	20.38
	5300	20.40
	5310	20.39
	5320	20.39
UNII 2e	5500	20.35
	5510	20.36
	5550	20.41
	5580	20.43
	5670	20.43

(Actual value of loss for the attenuator and cable combination)

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P

TEST CONFIGURATION(40 MHz BW & 80 MHz BW)

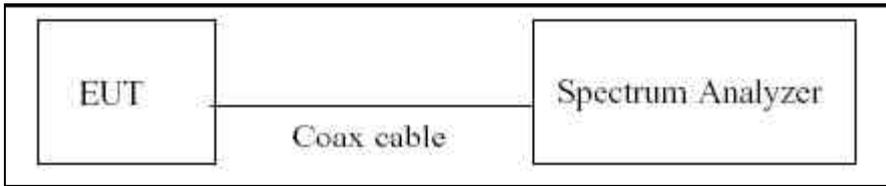

TEST PROCEDURE(40 MHz BW & 80 MHz BW)

The transmitter output is connected to the Spectrum Analyzer. We use the spectrum analyzer's integrated band power measurement function. We tested according to Method SA-2 in KDB 789033(issued 04/08/2013).

The Spectrum Analyzer is set to

- Average Power
 1. Measure the duty cycle.
 2. Set span to encompass the 26 dB EBW of the signal.
 3. RBW = 1 MHz.
 4. VBW ≥ 3 MHz.
 5. Number of points in sweep ≥ 2*span/RBW.
 6. Sweep time = auto.
 7. Detector = RMS.
 8. Do not use sweep triggering. Allow the sweep to “free run”.
 9. Trace average at least 100 traces in power averaging(RMS) mode
 10. Integrated bandwidth = OBW
 11. Add 10log(1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P

Sample Calculation

Output Power = Reading Value + ATT loss + Cable loss(1 ea) + Duty Cycle Factor

Output Power = 10 dBm + 20 dB + 0.8 dB + 0.21 dB = 31.01 dBm

Note :

1. Spectrum reading values are not plot data. The power results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 5.2 GHz, 5.3 GHz and 5.6 GHz range that was rounded off to the closest tenth dB. Actual value of loss for the attenuator and cable combination is below table.

Band	Frequency(MHz)	Loss(dB)
UNII 1	5180	20.30
	5190	20.29
	5200	20.28
	5230	20.29
	5240	20.34
UNII 2	5260	20.37
	5270	20.38
	5300	20.40
	5310	20.39
	5320	20.39
UNII 2e	5500	20.35
	5510	20.36
	5550	20.41
	5580	20.43
	5670	20.43

(Actual value of loss for the attenuator and cable combination)



TEST RESULTS

20 MHz BW

Conducted Output Power Measurements (802.11a Mode: 5180~5240)

802.11a Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5180	36	6	9.14	0.237	9.38	16.99
		9	9.06	0.351	9.41	16.99
		12	8.80	0.492	9.29	16.99
		18	8.81	0.619	9.42	16.99
		24	8.59	0.813	9.40	16.99
		36	8.43	1.075	9.51	16.99
		48	7.99	1.406	9.39	16.99
		54	7.82	1.502	9.32	16.99
5200	40	6	9.10	0.237	9.33	16.99
		9	9.12	0.351	9.47	16.99
		12	9.03	0.492	9.52	16.99
		18	9.01	0.619	9.63	16.99
		24	8.74	0.813	9.55	16.99
		36	8.43	1.075	9.50	16.99
		48	8.19	1.406	9.59	16.99
		54	8.10	1.502	9.60	16.99
5240	48	6	9.26	0.237	9.49	16.99
		9	9.26	0.351	9.61	16.99
		12	9.16	0.492	9.65	16.99
		18	9.00	0.619	9.62	16.99
		24	8.80	0.813	9.62	16.99
		36	8.44	1.075	9.51	16.99
		48	8.10	1.406	9.51	16.99
		54	7.91	1.502	9.42	16.99

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF855P

Conducted Output Power Measurements (802.11a Mode: 5260~5320)

802.11a Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5260	52	6	9.39	0.237	9.62	23.98
		9	9.31	0.351	9.66	23.98
		12	9.21	0.492	9.71	23.98
		18	9.11	0.619	9.73	23.98
		24	8.91	0.813	9.72	23.98
		36	8.50	1.075	9.58	23.98
		48	8.29	1.406	9.70	23.98
		54	8.00	1.502	9.50	23.98
5300	60	6	9.17	0.237	9.40	23.98
		9	8.96	0.351	9.32	23.98
		12	8.91	0.492	9.40	23.98
		18	8.77	0.619	9.39	23.98
		24	8.67	0.813	9.49	23.98
		36	8.17	1.075	9.25	23.98
		48	7.89	1.406	9.30	23.98
		54	7.86	1.502	9.36	23.98
5320	64	6	8.70	0.237	8.93	23.98
		9	8.82	0.351	9.17	23.98
		12	8.75	0.492	9.24	23.98
		18	8.66	0.619	9.28	23.98
		24	8.36	0.813	9.17	23.98
		36	8.03	1.075	9.11	23.98
		48	7.80	1.406	9.20	23.98
		54	7.80	1.502	9.30	23.98

Conducted Output Power Measurements (802.11a Mode: 5500~5700)

802.11a Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5500	100	6	8.28	0.237	8.52	23.98
		9	8.09	0.351	8.44	23.98
		12	8.09	0.492	8.59	23.98
		18	7.90	0.619	8.52	23.98
		24	7.73	0.813	8.54	23.98
		36	7.45	1.075	8.53	23.98
		48	7.23	1.406	8.63	23.98
		54	6.99	1.502	8.49	23.98
5580	116	6	8.92	0.237	9.16	23.98
		9	8.73	0.351	9.09	23.98
		12	8.64	0.492	9.13	23.98
		18	8.50	0.619	9.12	23.98
		24	8.30	0.813	9.11	23.98
		36	8.06	1.075	9.13	23.98
		48	7.86	1.406	9.27	23.98
		54	7.62	1.502	9.13	23.98
5700	140	6	8.67	0.237	8.91	23.98
		9	8.66	0.351	9.01	23.98
		12	8.45	0.492	8.95	23.98
		18	8.26	0.619	8.88	23.98
		24	8.12	0.813	8.94	23.98
		36	7.66	1.075	8.74	23.98
		48	7.43	1.406	8.84	23.98
		54	7.34	1.502	8.84	23.98

Conducted Output Power Measurements (802.11n Mode: 5180~5240)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5180	36	6.5	8.03	0.238	8.27	16.99
		13	7.80	0.464	8.26	16.99
		19.5	7.65	0.722	8.37	16.99
		26	7.46	0.876	8.33	16.99
		39	7.23	1.160	8.39	16.99
		52	6.79	1.439	8.22	16.99
		58.5	6.69	1.663	8.35	16.99
		65	6.68	1.761	8.44	16.99
5200	40	6.5	8.13	0.238	8.37	16.99
		13	7.95	0.464	8.41	16.99
		19.5	7.84	0.722	8.57	16.99
		26	7.48	0.876	8.36	16.99
		39	7.17	1.160	8.33	16.99
		52	6.85	1.439	8.29	16.99
		58.5	6.83	1.663	8.49	16.99
		65	6.67	1.761	8.43	16.99
5240	48	6.5	7.94	0.238	8.18	16.99
		13	7.70	0.464	8.16	16.99
		19.5	7.62	0.722	8.34	16.99
		26	7.33	0.876	8.21	16.99
		39	7.03	1.160	8.19	16.99
		52	6.67	1.439	8.11	16.99
		58.5	6.60	1.663	8.26	16.99
		65	6.54	1.761	8.30	16.99

Conducted Output Power Measurements (802.11n Mode: 5260~5320)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5260	52	6.5	8.01	0.238	8.25	23.98
		13	7.83	0.464	8.30	23.98
		19.5	7.72	0.722	8.44	23.98
		26	7.50	0.876	8.37	23.98
		39	7.07	1.160	8.23	23.98
		52	6.81	1.439	8.25	23.98
		58.5	6.79	1.663	8.45	23.98
		65	6.60	1.761	8.36	23.98
5300	60	6.5	7.78	0.238	8.02	23.98
		13	7.53	0.464	8.00	23.98
		19.5	7.31	0.722	8.03	23.98
		26	7.11	0.876	7.99	23.98
		39	6.86	1.160	8.02	23.98
		52	6.64	1.439	8.08	23.98
		58.5	6.41	1.663	8.07	23.98
		65	6.29	1.761	8.05	23.98
5320	64	6.5	7.25	0.238	7.49	23.98
		13	6.99	0.464	7.45	23.98
		19.5	6.89	0.722	7.61	23.98
		26	6.69	0.876	7.57	23.98
		39	6.30	1.160	7.46	23.98
		52	6.07	1.439	7.51	23.98
		58.5	5.97	1.663	7.63	23.98
		65	5.83	1.761	7.59	23.98

Conducted Output Power Measurements (802.11n Mode: 5500~5700)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5500	100	6.5	6.84	0.238	7.08	23.98
		13	6.72	0.464	7.19	23.98
		19.5	6.49	0.722	7.21	23.98
		26	6.23	0.876	7.11	23.98
		39	6.18	1.160	7.34	23.98
		52	5.89	1.439	7.33	23.98
		58.5	5.68	1.663	7.35	23.98
		65	5.60	1.761	7.36	23.98
5580	116	6.5	7.28	0.238	7.52	23.98
		13	7.16	0.464	7.62	23.98
		19.5	7.01	0.722	7.73	23.98
		26	6.86	0.876	7.74	23.98
		39	6.42	1.160	7.59	23.98
		52	6.16	1.439	7.60	23.98
		58.5	6.05	1.663	7.71	23.98
		65	5.95	1.761	7.71	23.98
5700	140	6.5	6.97	0.238	7.20	23.98
		13	6.83	0.464	7.30	23.98
		19.5	6.71	0.722	7.43	23.98
		26	6.31	0.876	7.18	23.98
		39	6.02	1.160	7.18	23.98
		52	5.71	1.439	7.15	23.98
		58.5	5.67	1.663	7.33	23.98
		65	5.56	1.761	7.32	23.98



Conducted Output Power Measurements (802.11ac Mode: 5180~5240)

802.11ac Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5180	36	6.5	7.75	0.433	8.18	16.99
		13	7.51	0.775	8.29	16.99
		19.5	7.31	1.069	8.38	16.99
		26	7.06	1.320	8.37	16.99
		39	6.42	1.783	8.20	16.99
		52	6.27	2.102	8.37	16.99
		58.5	6.09	2.255	8.35	16.99
		65	5.99	2.357	8.35	16.99
		78	5.67	2.593	8.26	16.99
5200	40	6.5	7.80	0.433	8.23	16.99
		13	7.45	0.775	8.22	16.99
		19.5	7.13	1.069	8.20	16.99
		26	6.86	1.320	8.18	16.99
		39	6.50	1.783	8.28	16.99
		52	6.24	2.102	8.34	16.99
		58.5	6.08	2.255	8.33	16.99
		65	5.97	2.357	8.33	16.99
		78	5.68	2.593	8.27	16.99
5240	48	6.5	8.00	0.433	8.43	16.99
		13	7.74	0.775	8.51	16.99
		19.5	7.34	1.069	8.41	16.99
		26	7.07	1.320	8.39	16.99
		39	6.70	1.783	8.48	16.99
		52	6.52	2.102	8.62	16.99
		58.5	6.37	2.255	8.63	16.99
		65	6.03	2.357	8.38	16.99
		78	5.84	2.593	8.43	16.99

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P



Conducted Output Power Measurements (802.11ac Mode: 5260~5320)

802.11ac Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5260	52	6.5	8.13	0.433	8.56	16.99
		13	7.49	0.775	8.26	16.99
		19.5	7.27	1.069	8.34	16.99
		26	6.68	1.320	7.99	16.99
		39	6.67	1.783	8.45	16.99
		52	6.40	2.102	8.50	16.99
		58.5	6.19	2.255	8.45	16.99
		65	6.09	2.357	8.45	16.99
		78	5.83	2.593	8.42	16.99
5300	60	6.5	7.72	0.433	8.15	16.99
		13	7.30	0.775	8.08	16.99
		19.5	6.99	1.069	8.06	16.99
		26	6.75	1.320	8.07	16.99
		39	6.43	1.783	8.21	16.99
		52	6.31	2.102	8.42	16.99
		58.5	5.63	2.255	7.88	16.99
		65	5.54	2.357	7.90	16.99
		78	5.37	2.593	7.97	16.99
5320	64	6.5	7.41	0.433	7.84	16.99
		13	7.12	0.775	7.89	16.99
		19.5	6.91	1.069	7.98	16.99
		26	6.31	1.320	7.63	16.99
		39	5.90	1.783	7.68	16.99
		52	5.54	2.102	7.64	16.99
		58.5	5.35	2.255	7.60	16.99
		65	5.16	2.357	7.52	16.99
		78	4.89	2.593	7.48	16.99

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P



Conducted Output Power Measurements (802.11ac Mode: 5500~5700)

802.11ac Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5500	100	6.5	7.16	0.433	7.60	16.99
		13	6.94	0.775	7.71	16.99
		19.5	6.68	1.069	7.74	16.99
		26	6.29	1.320	7.61	16.99
		39	5.87	1.783	7.66	16.99
		52	5.70	2.102	7.81	16.99
		58.5	5.55	2.255	7.81	16.99
		65	5.36	2.357	7.72	16.99
		78	5.06	2.593	7.65	16.99
5580	116	6.5	7.78	0.433	8.22	16.99
		13	7.47	0.775	8.25	16.99
		19.5	7.25	1.069	8.32	16.99
		26	7.02	1.320	8.34	16.99
		39	6.54	1.783	8.32	16.99
		52	6.20	2.102	8.30	16.99
		58.5	6.07	2.255	8.32	16.99
		65	5.94	2.357	8.30	16.99
		78	5.75	2.593	8.34	16.99
5700	140	6.5	7.85	0.433	8.29	16.99
		13	7.38	0.775	8.16	16.99
		19.5	7.14	1.069	8.21	16.99
		26	6.90	1.320	8.22	16.99
		39	6.40	1.783	8.18	16.99
		52	6.10	2.102	8.20	16.99
		58.5	5.96	2.255	8.21	16.99
		65	5.86	2.357	8.22	16.99
		78	5.60	2.593	8.20	16.99

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P

Conducted Output Power Measurements (802.11n Mode: 5190~5230)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5190	38	13.5	7.76	0.504	8.26	16.99
		27	7.17	0.909	8.08	16.99
		40.5	6.88	1.284	8.16	16.99
		54	6.54	1.596	8.14	16.99
		81	6.06	2.208	8.27	16.99
		108	5.53	2.639	8.17	16.99
		121.5	5.53	2.838	8.36	16.99
		135	5.45	2.990	8.44	16.99
5230	46	13.5	7.62	0.504	8.13	16.99
		27	7.25	0.909	8.16	16.99
		40.5	7.03	1.284	8.31	16.99
		54	6.63	1.596	8.22	16.99
		81	6.28	2.208	8.49	16.99
		108	5.74	2.639	8.38	16.99
		121.5	5.53	2.838	8.37	16.99
		135	5.47	2.990	8.46	16.99

Conducted Output Power Measurements (802.11n Mode: 5270~5310)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5270	54	13.5	7.52	0.504	8.03	23.98
		27	7.37	0.909	8.28	23.98
		40.5	6.90	1.284	8.19	23.98
		54	6.53	1.596	8.13	23.98
		81	6.21	2.208	8.42	23.98
		108	5.72	2.639	8.36	23.98
		121.5	5.57	2.838	8.40	23.98
		135	5.43	2.990	8.42	23.98
5310	62	13.5	7.21	0.504	7.71	23.98
		27	7.08	0.909	7.98	23.98
		40.5	6.65	1.284	7.94	23.98
		54	6.22	1.596	7.82	23.98
		81	5.98	2.208	8.18	23.98
		108	5.47	2.639	8.11	23.98
		121.5	5.18	2.838	8.02	23.98
		135	5.02	2.990	8.01	23.98

Conducted Output Power Measurements (802.11n Mode: 5510~5670)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5510	102	13.5	6.42	0.504	6.93	23.98
		27	6.13	0.909	7.03	23.98
		40.5	5.72	1.284	7.00	23.98
		54	5.37	1.596	6.97	23.98
		81	4.90	2.208	7.11	23.98
		108	4.58	2.639	7.22	23.98
		121.5	4.37	2.838	7.21	23.98
		135	4.10	2.990	7.09	23.98
5550	110	13.5	6.74	0.504	7.25	23.98
		27	6.33	0.909	7.24	23.98
		40.5	6.03	1.284	7.31	23.98
		54	5.73	1.596	7.33	23.98
		81	5.33	2.208	7.54	23.98
		108	4.91	2.639	7.55	23.98
		121.5	4.57	2.838	7.41	23.98
		135	4.45	2.990	7.45	23.98
5670	134	13.5	6.66	0.504	7.17	23.98
		27	6.36	0.909	7.27	23.98
		40.5	6.00	1.284	7.28	23.98
		54	5.58	1.596	7.18	23.98
		81	4.99	2.208	7.20	23.98
		108	4.64	2.639	7.28	23.98
		121.5	4.52	2.838	7.36	23.98
		135	4.41	2.990	7.40	23.98

Conducted Output Power Measurements (802.11ac Mode: 5190~5230)

802.11ac Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5190	38	13.5	7.32	0.821	8.14	16.99
		27	6.82	1.382	8.21	16.99
		40.5	6.47	1.806	8.27	16.99
		54	5.85	2.190	8.04	16.99
		81	5.50	2.717	8.22	16.99
		108	5.28	3.010	8.29	16.99
		121.5	5.10	3.172	8.27	16.99
		135	4.94	3.274	8.21	16.99
		162	4.81	3.552	8.36	16.99
		180	4.64	3.622	8.26	16.99
5230	46	13.5	7.39	0.821	8.21	16.99
		27	6.76	1.382	8.14	16.99
		40.5	6.35	1.806	8.16	16.99
		54	6.00	2.190	8.19	16.99
		81	5.53	2.717	8.24	16.99
		108	5.15	3.010	8.16	16.99
		121.5	4.98	3.172	8.15	16.99
		135	4.84	3.274	8.12	16.99
		162	4.73	3.552	8.28	16.99
		180	4.73	3.622	8.35	16.99

Conducted Output Power Measurements (802.11ac Mode: 5270~5310)

802.11ac Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5270	54	13.5	7.26	0.821	8.08	16.99
		27	6.76	1.382	8.14	16.99
		40.5	6.24	1.806	8.05	16.99
		54	5.96	2.190	8.15	16.99
		81	5.39	2.717	8.11	16.99
		108	5.15	3.010	8.16	16.99
		121.5	4.98	3.172	8.15	16.99
		135	4.86	3.274	8.13	16.99
		162	4.70	3.552	8.25	16.99
		180	4.66	3.622	8.28	16.99
5310	62	13.5	6.98	0.821	7.80	16.99
		27	6.44	1.382	7.82	16.99
		40.5	6.07	1.806	7.88	16.99
		54	5.63	2.190	7.82	16.99
		81	5.23	2.717	7.95	16.99
		108	4.91	3.010	7.92	16.99
		121.5	4.72	3.172	7.89	16.99
		135	4.49	3.274	7.77	16.99
		162	4.39	3.552	7.94	16.99
		180	4.34	3.622	7.96	16.99



Conducted Output Power Measurements (802.11ac Mode: 5510~5670)

802.11ac Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5510	102	13.5	6.30	0.821	7.12	16.99
		27	5.87	1.382	7.25	16.99
		40.5	5.36	1.806	7.16	16.99
		54	4.87	2.190	7.06	16.99
		81	4.52	2.717	7.24	16.99
		108	4.22	3.010	7.23	16.99
		121.5	3.96	3.172	7.13	16.99
		135	3.82	3.274	7.10	16.99
		162	3.65	3.552	7.20	16.99
		180	3.58	3.622	7.20	16.99
5550	110	13.5	6.55	0.821	7.38	16.99
		27	6.14	1.382	7.52	16.99
		40.5	5.60	1.806	7.40	16.99
		54	5.17	2.190	7.36	16.99
		81	4.74	2.717	7.46	16.99
		108	4.48	3.010	7.49	16.99
		121.5	4.33	3.172	7.51	16.99
		135	4.20	3.274	7.47	16.99
		162	3.92	3.552	7.47	16.99
		180	3.89	3.622	7.52	16.99
5670	134	13.5	6.54	0.821	7.36	16.99
		27	6.00	1.382	7.38	16.99
		40.5	5.53	1.806	7.33	16.99
		54	5.14	2.190	7.33	16.99
		81	4.79	2.717	7.50	16.99
		108	4.43	3.010	7.44	16.99
		121.5	4.23	3.172	7.40	16.99
		135	4.03	3.274	7.30	16.99
		162	3.89	3.552	7.44	16.99
		180	3.86	3.622	7.48	16.99

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P



80 MHz BW

Conducted Output Power Measurements (802.11ac Mode: 5210)

802.11ac Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5210	42	29.3	7.19	1.476	8.67	16.99
		58.5	6.44	2.351	8.79	16.99
		87.8	5.93	2.810	8.74	16.99
		117	5.63	3.195	8.82	16.99
		175.5	5.10	3.705	8.80	16.99
		234	4.84	3.992	8.83	16.99
		263.3	4.63	4.155	8.78	16.99
		292.5	4.60	4.251	8.85	16.99
		351	4.44	4.333	8.77	16.99
		390	4.31	4.449	8.76	16.99

Conducted Output Power Measurements (802.11ac Mode: 5290)

802.11ac Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5290	58	29.3	7.09	1.476	8.57	16.99
		58.5	6.28	2.351	8.63	16.99
		87.8	5.72	2.810	8.53	16.99
		117	5.43	3.195	8.62	16.99
		175.5	4.96	3.705	8.66	16.99
		234	4.76	3.992	8.75	16.99
		263.3	4.61	4.155	8.77	16.99
		292.5	4.53	4.251	8.79	16.99
		351	4.45	4.333	8.78	16.99
		390	4.19	4.449	8.64	16.99

Conducted Output Power Measurements (802.11ac Mode: 5530~5690)

802.11ac Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5530	106	29.3	6.12	1.476	7.60	16.99
		58.5	5.27	2.351	7.62	16.99
		87.8	4.74	2.810	7.55	16.99
		117	4.38	3.195	7.58	16.99
		175.5	3.90	3.705	7.60	16.99
		234	3.64	3.992	7.63	16.99
		263.3	3.52	4.155	7.67	16.99
		292.5	3.50	4.251	7.75	16.99
		351	3.38	4.333	7.71	16.99
		390	3.16	4.449	7.61	16.99
5690	138	29.3	6.35	1.476	7.83	16.99
		58.5	5.65	2.351	8.00	16.99
		87.8	5.08	2.810	7.89	16.99
		117	4.71	3.195	7.90	16.99
		175.5	4.17	3.705	7.87	16.99
		234	4.07	3.992	8.06	16.99
		263.3	3.89	4.155	8.04	16.99
		292.5	3.91	4.251	8.16	16.99
		351	3.72	4.333	8.05	16.99
		390	3.61	4.449	8.05	16.99

Note :

1. In order to simplify the report, attached plots were only the highest conducted power channel and data rate.
2. We applied the 15.407 for Ch.144, 142 and 138 in 802.11ac according to KDB 644545 D01 v01r01.

40 MHz BW


RESULT PLOTS (5190 MHz ~5230 MHz)

Conducted Output Power (802.11n-CH 46) 81 Mbps



RESULT PLOTS (5270 MHz ~5310 MHz)


Conducted Output Power (802.11n-CH 54) 81 Mbps

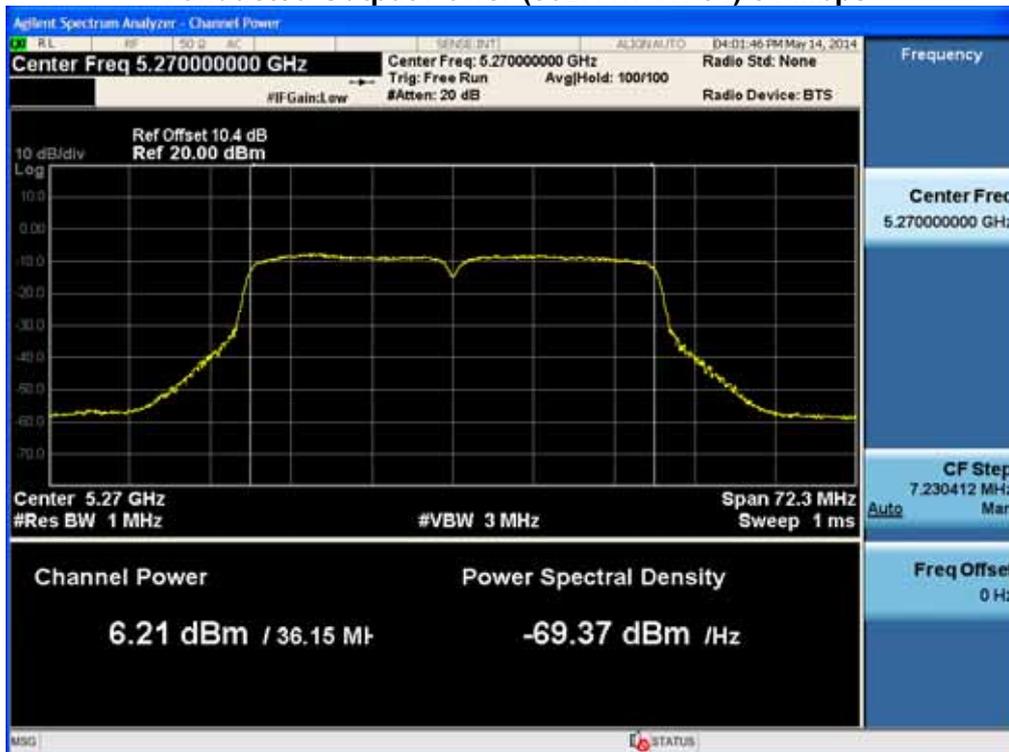

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P


RESULT PLOTS (5510 MHz ~5670 MHz)

Conducted Output Power (802.11n-CH 110) 108 Mbps

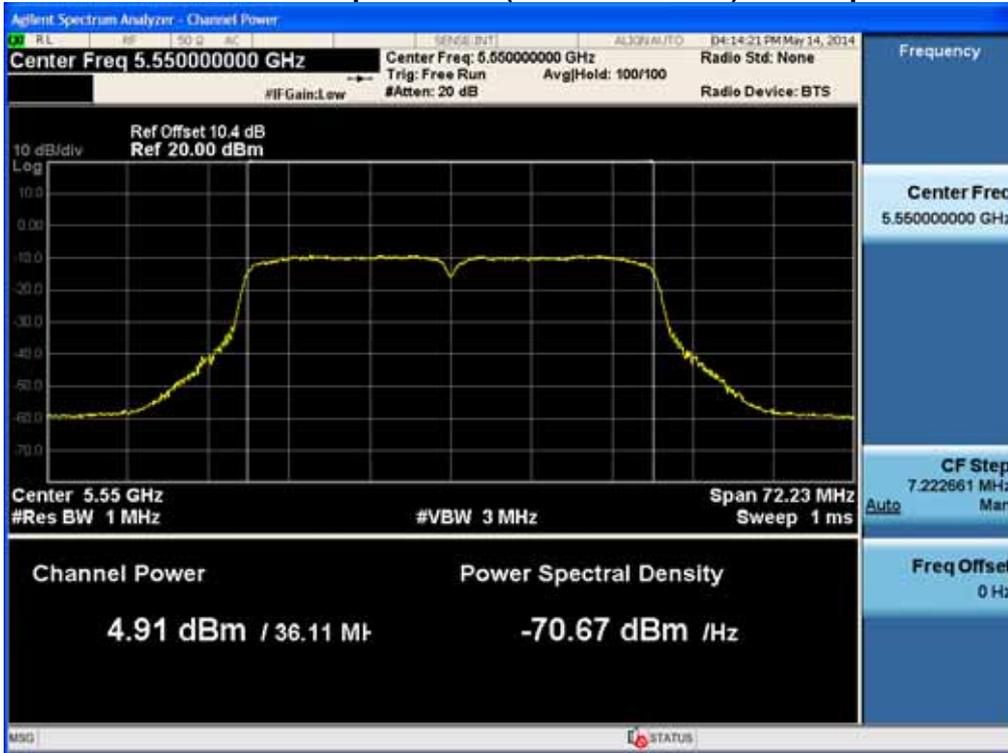

RESULT PLOTS (5190 ~ 5230 MHz)


Conducted Output Power (802.11ac-CH 38) 162 Mbps

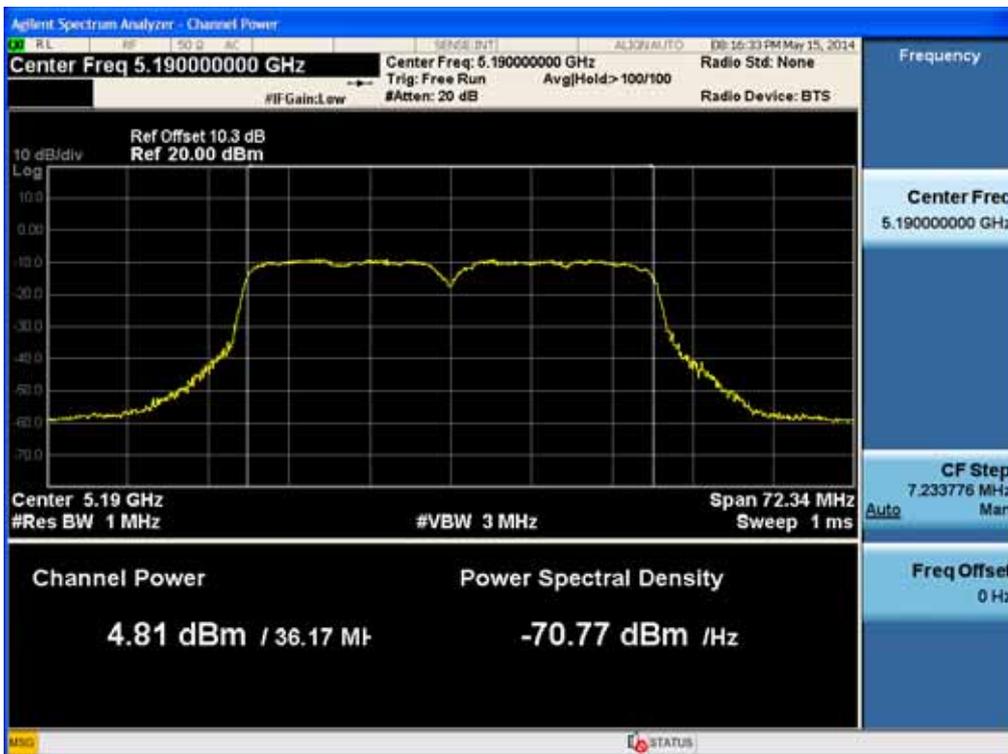



RESULT PLOTS (5270 ~ 5310 MHz)

Conducted Output Power (802.11ac-CH 54) 180 Mbps

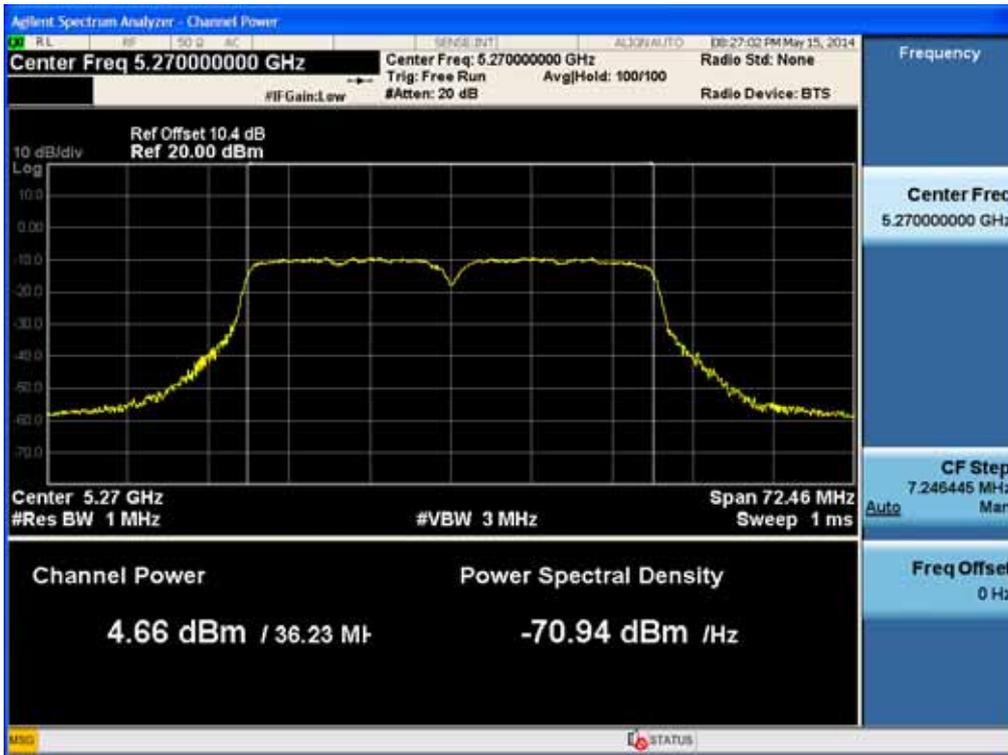

RESULT PLOTS (5510 ~ 5710 MHz)

Conducted Output Power (802.11ac-CH 110) 180 Mbps



FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P

80 MHz BW

RESULT PLOTS (5210 MHz)

Conducted Output Power (802.11ac-CH 42) 292.5 Mbps



RESULT PLOTS (5290 MHz)

Conducted Output Power (802.11ac-CH 58) 292.5 Mbps



FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



RESULT PLOTS (5530 MHz ~ 5690 MHz)

Conducted Output Power (802.11ac-CH 138) 292.5 Mbps




FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P

8.4 POWER SPECTRAL DENSITY

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies. The maximum permissible peak power spectral density is 4 dBm/ MHz in the 5.15 GHz – 5.25 GHz band and 11 dBm/ MHz in the 5.25 GHz – 5.35 GHz and 5.47 GHz – 5.725 GHz bands

TEST CONFIGURATION

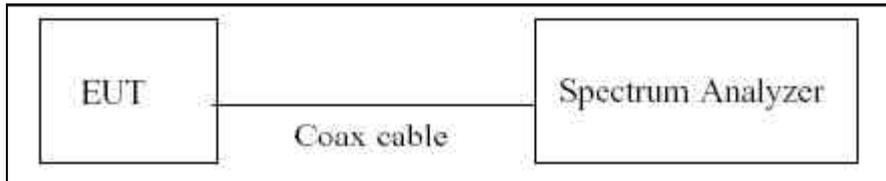

TEST PROCEDURE

We tested according to Method in KDB 789033(issued 04/08/2013).

The spectrum analyzer is set to :

1. Set span to encompass the entire emission bandwidth(EBW) of the signal.
2. RBW = 1 MHz.
3. VBW ≥ 3 MHz.
4. Number of points in sweep ≥ 2*span/RBW.
5. Sweep time = auto.
6. Detector = RMS(i.e., power averaging), if available. Otherwise, use sample detector mode.
7. Do not use sweep triggering. Allow the sweep to “free run”.
8. Trace average at least 100 traces in power averaging(RMS) mode
9. Use the peak search function on the spectrum analyzer to find the peak of the spectrum.
10. If Method SA-2 was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.

Sample Calculation

PSD = Reading Value + ATT loss + Cable loss(1 ea) + Duty Cycle Factor

Output Power = -5 dBm + 10 dB + 0.8 dB + 0.21 dB = 16.01 dBm

Note :

1. Spectrum reading values are not plot data. The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 5.2 GHz, 5.3 GHz and 5.6 GHz range that was rounded off to the closest tenth dB. Actual value of loss for the attenuator and cable combination is below table.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P	

Band	Frequency(MHz)	Loss(dB)
UNII 1	5180	20.30
	5190	20.29
	5200	20.28
	5230	20.29
	5240	20.34
UNII 2	5260	20.37
	5270	20.38
	5300	20.40
	5310	20.39
	5320	20.39
UNII 2e	5500	20.35
	5510	20.36
	5550	20.41
	5580	20.43
	5670	20.43
	5700	20.30

(Actual value of loss for the attenuator and cable combination)



TEST RESULTS

Conducted Power Density Measurements

Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5180	36	802.11a	-2.496	1.075	-1.421	4	Pass
5200	40		-1.839	0.619	-1.220	4	Pass
5240	48		-1.520	0.492	-1.028	4	Pass
5260	52	802.11a	-1.971	0.619	-1.352	11	Pass
5300	60		-2.499	0.813	-1.686	11	Pass
5320	64		-3.305	1.502	-1.803	11	Pass
5500	100	802.11a	-3.658	1.406	-2.252	11	Pass
5580	116		-3.033	1.406	-1.627	11	Pass
5700	140		-2.439	0.351	-2.088	11	Pass

Conducted Power Density Measurements

Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5180	36	802.11n	-4.388	1.761	-2.627	4	Pass
5200	40	20MHz	-3.560	0.722	-2.838	4	Pass
5240	48	BW	-3.700	0.722	-2.978	4	Pass
5260	52	802.11n	-4.288	1.663	-2.625	11	Pass
5300	60	20MHz	-4.603	1.439	-3.164	11	Pass
5320	64	BW	-5.045	1.663	-3.382	11	Pass
5500	100	802.11n	-5.497	1.761	-3.736	11	Pass
5580	116	20MHz	-4.648	0.876	-3.772	11	Pass
5700	140	BW	-4.654	0.722	-3.932	11	Pass

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNF0855P

Conducted Power Density Measurements

Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5180	36	802.11ac 20MHz BW	-4.111	1.069	-3.042	4	Pass
5200	40		-4.670	2.102	-2.568	4	Pass
5240	48		-4.709	2.255	-2.454	4	Pass
5260	52	802.11ac 20MHz BW	-3.447	0.433	-3.014	11	Pass
5300	60		-5.175	2.102	-3.073	11	Pass
5320	64		-4.554	1.069	-3.485	11	Pass
5500	100	802.11ac 20MHz BW	-4.990	2.255	-2.735	11	Pass
5580	116		-5.364	2.593	-2.771	11	Pass
5700	140		-3.583	0.433	-3.150	11	Pass

Conducted Power Density Measurements

Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5190	38	802.11n 40MHz BW	-8.347	2.990	-5.357	4	Pass
5230	46		-7.920	2.208	-5.712	4	Pass
5270	54	802.11n 40MHz BW	-7.791	2.990	-4.801	11	Pass
5310	62		-7.873	2.208	-5.665	11	Pass
5510	102	802.11n 40MHz BW	-9.432	2.639	-6.793	11	Pass
5550	110		-8.799	2.639	-6.160	11	Pass
5670	134		-9.443	2.990	-6.453	11	Pass

Conducted Power Density Measurements

Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5190	38	802.11ac 40MHz BW	-8.658	3.552	-5.106	4	Pass
5230	46		-8.821	3.622	-5.199	4	Pass
5270	54	802.11ac 40MHz BW	-9.078	3.622	-5.456	11	Pass
5310	62		-9.007	3.622	-5.385	11	Pass
5510	102	802.11ac 40MHz BW	-8.258	1.382	-6.876	11	Pass
5550	110		-9.261	1.382	-7.879	11	Pass
5670	134		-8.883	2.717	-6.166	11	Pass

Conducted Power Density Measurements

Frequency (MHz)	Channel No.	Mode	Test Result				
			Measured Power Density (dBm)	Duty Cycle Factor (dB)	Measured Power Density(dBm) + Duty Cycle Factor	Limit (dBm)	Pass/Fail
5210	42	802.11ac 80MHz BW	-11.556	4.251	-7.305	4	Pass
5290	58	802.11ac 80MHz BW	-11.998	4.251	-7.747	11	Pass
5530	106	802.11ac 80MHz BW	-12.868	4.251	-8.617	11	Pass
5690	138	802.11ac 80MHz BW	-12.656	4.251	-8.405	11	Pass

Note :

1. In order to simplify the report, attached plots were only the highest PSD channel.
2. We applied the 15.407 for Ch.144, 142 and 138 in 802.11ac according to KDB 644545 D01 v01r01.

RESULT PLOTS

Power Spectral Density (802.11a-CH 48)



Power Spectral Density (802.11a-CH 52)



FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P

Power Spectral Density (802.11a-CH 116)



20 MHz BW

Power Spectral Density (802.11n-CH 36)



FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P

Power Spectral Density (802.11n-CH 52)



Power Spectral Density (802.11n-CH 100)



FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P

Power Spectral Density (802.11ac-CH 48)



Power Spectral Density (802.11ac-CH 52)



FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P

Power Spectral Density (802.11ac-CH 100)



FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P

Power Spectral Density (802.11n-CH 38)




Power Spectral Density (802.11n-CH 54)



FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P

Power Spectral Density (802.11n-CH 110)

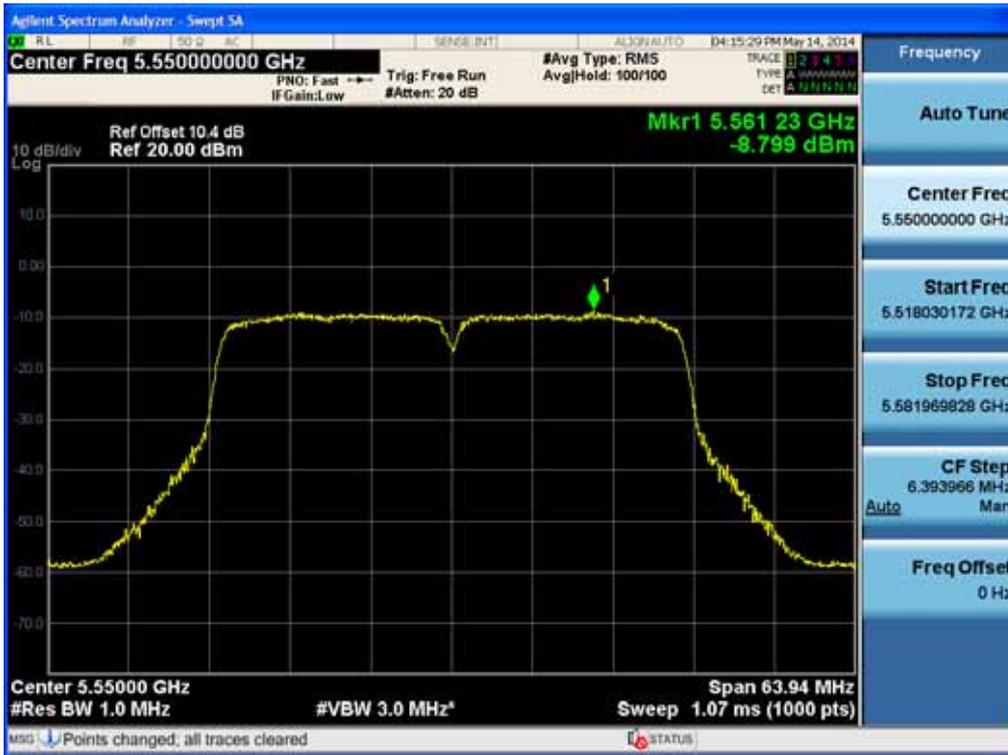

Power Spectral Density (802.11ac-CH 38)



FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P

Power Spectral Density (802.11ac-CH 62)



Power Spectral Density (802.11ac-CH 134)




FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P

Power Spectral Density (802.11ac-CH 42)



Power Spectral Density (802.11ac-CH 58)

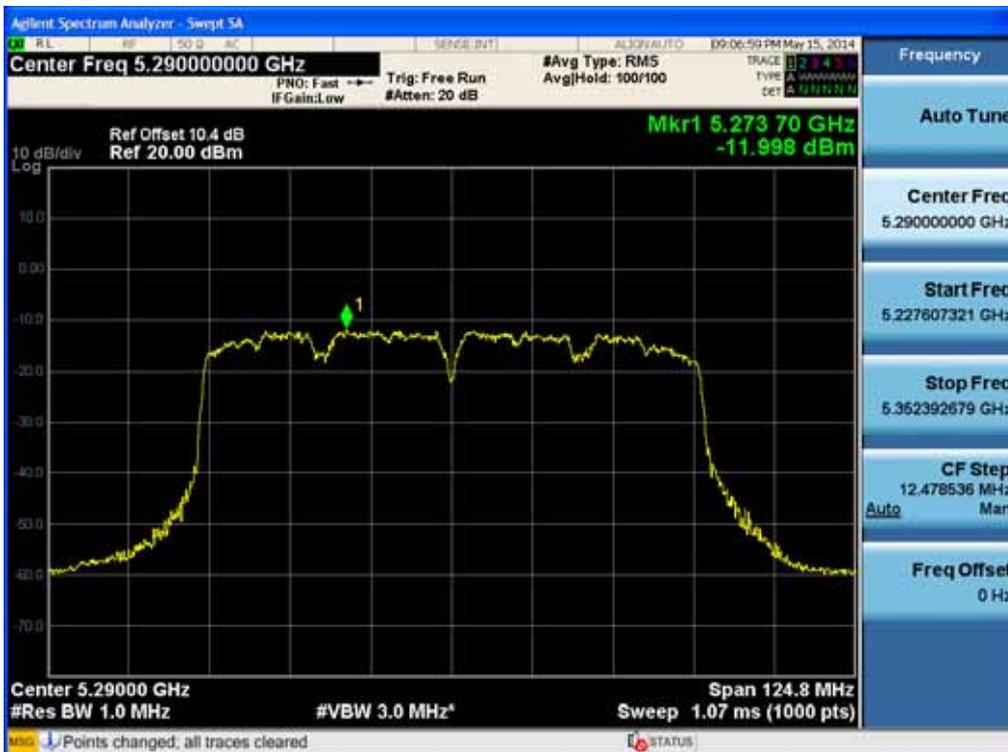


FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P

Power Spectral Density (802.11ac-CH 106)



Power Spectral Density (802.11ac-CH 138)

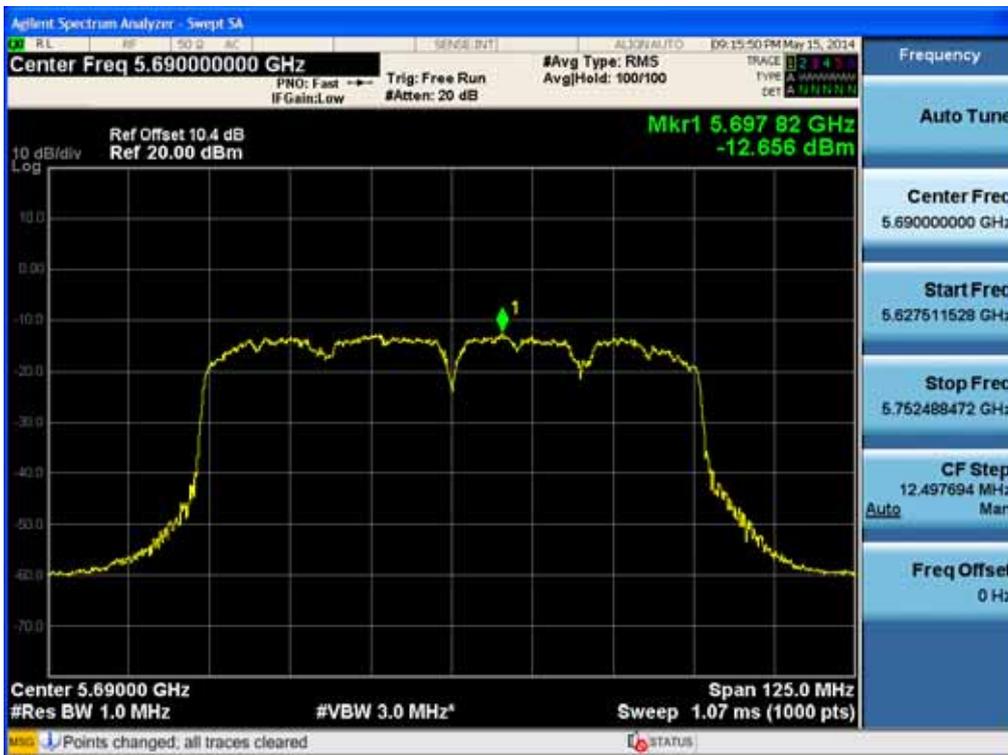


FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P

8.5 PEAK EXCURSION RATIO

The spectrum analyzer was connected to the antenna terminal while the EUT was operating in the continuous transmission mode at the appropriate center frequencies. The largest permissible difference between the modulation envelope(measured using a peak hold function) and the maximum conducted output power 13 dB/MHz.

TEST CONFIGURATION

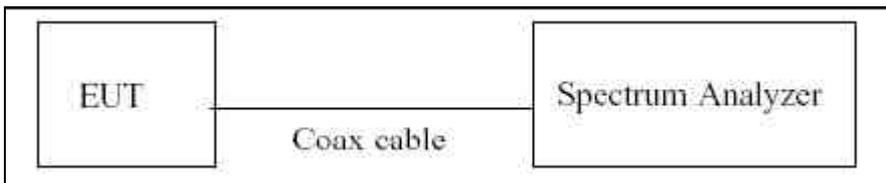

TEST PROCEDURE

We tested according to KDB 789033(issued 04/08/2013).

The spectrum analyzer is set to :

1. Span = Set the span to view the entire emission bandwidth.
2. RBW = 1 MHz
3. VBW \geq 3 MHz
4. Detector Mode = Peak
5. Trace Mode = Max hold
6. Allow the sweeps to continue until the trace stabilizes.
7. Use the peak search function to find the peak of the spectrum.
8. Use the procedure to measure the PPSD
9. Compute the ratio of the maximum of the peak-max-hold spectrum to the PPSD.

Note :

1. The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 5.2 GHz, 5.3 GHz and 5.6 GHz range that was rounded off to the closest tenth dB. Actual value of loss for the attenuator and cable combination is below table.
4. We applied the 15.407 for Ch.144, 142 and 138 in 802.11ac according to KDB 644545 D01 v01r01.


FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P

Band	Frequency(MHz)	Loss(dB)
UNII 1	5180	20.30
	5190	20.29
	5200	20.28
	5230	20.29
	5240	20.34
UNII 2	5260	20.37
	5270	20.38
	5300	20.40
	5310	20.39
	5320	20.39
UNII 2e	5500	20.35
	5510	20.36
	5550	20.41
	5580	20.43
	5670	20.43
	5700	20.30

(Actual value of loss for the attenuator and cable combination)

RESULT PLOTS

Peak Excursion Ratio (802.11a-CH 36)

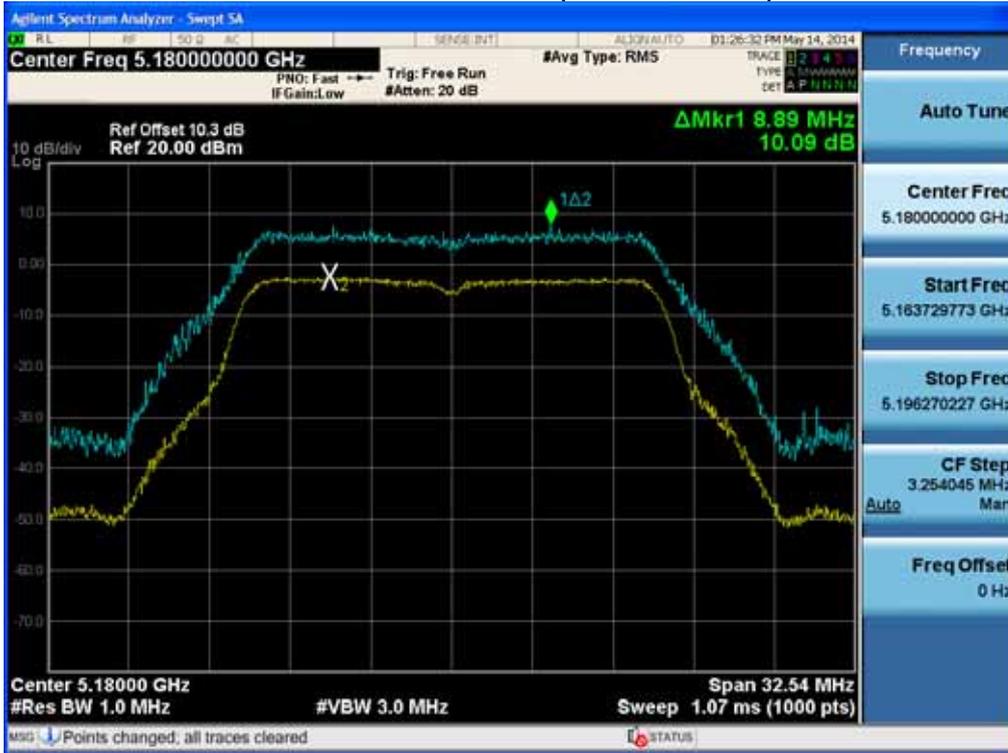

Peak Excursion Ratio (802.11a-CH 40)



FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNF0855P

Peak Excursion Ratio (802.11a-CH 48)



Peak Excursion Ratio (802.11a-CH 52)



FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P

Peak Excursion Ratio (802.11a-CH 60)



Peak Excursion Ratio (802.11a-CH 64)




FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P

Peak Excursion Ratio (802.11a-CH 100)



Peak Excursion Ratio (802.11a-CH 116)

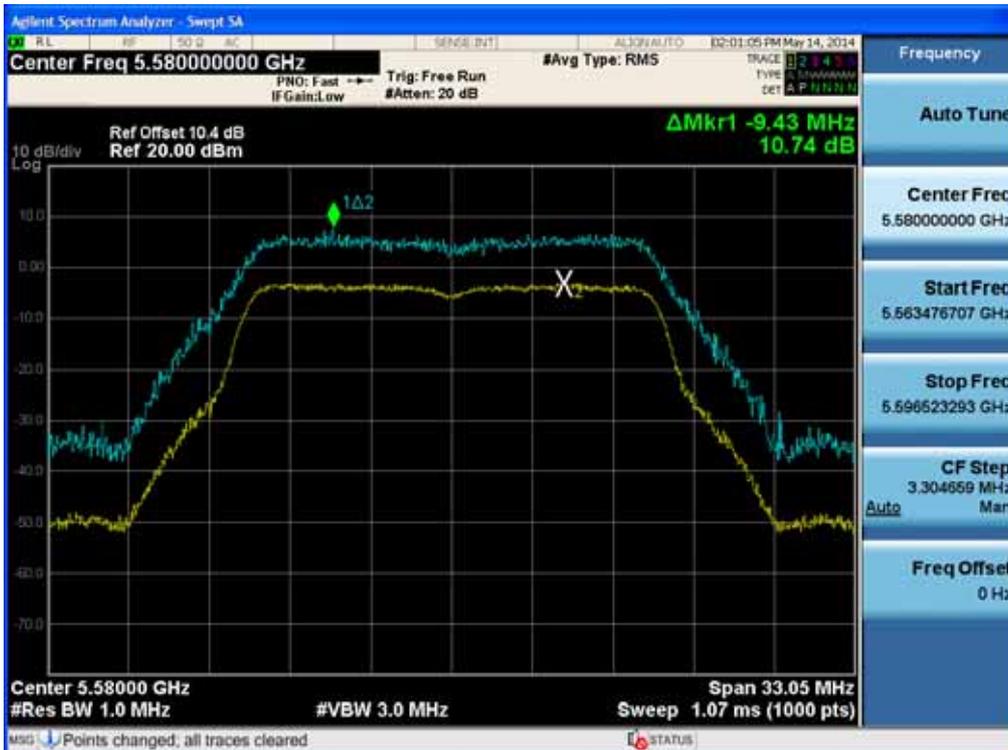


FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P	

Peak Excursion Ratio (802.11a-CH 140)



FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P	

Peak Excursion Ratio (802.11n-CH 36)

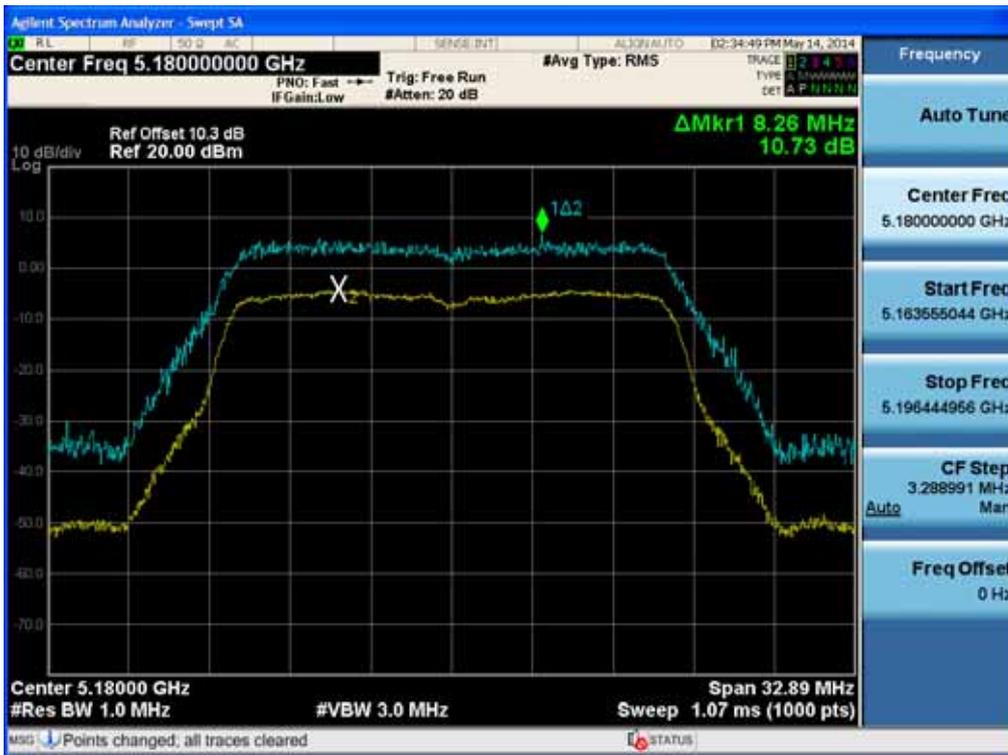

Peak Excursion Ratio (802.11n-CH 40)



FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P

Peak Excursion Ratio (802.11n-CH 48)



Peak Excursion Ratio (802.11n-CH 52)



FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P

Peak Excursion Ratio (802.11n-CH 60)




Peak Excursion Ratio (802.11n-CH 64)



FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P

Peak Excursion Ratio (802.11n-CH 100)

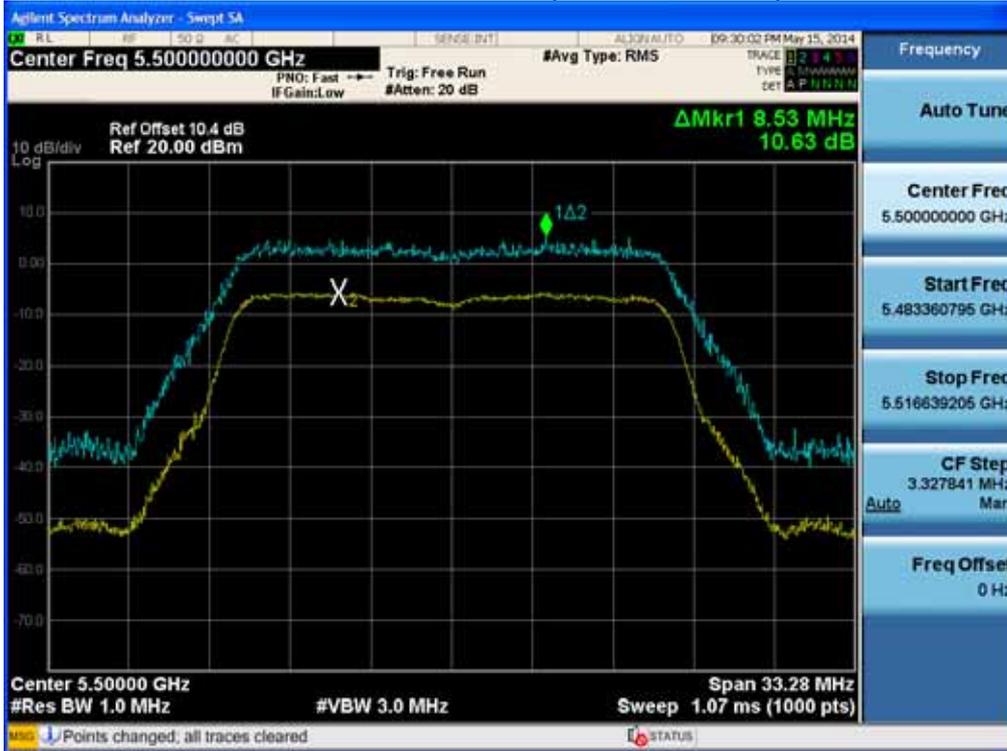

Peak Excursion Ratio (802.11n-CH 116)



FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P	

Peak Excursion Ratio (802.11n-CH 140)



FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P

Peak Excursion Ratio (802.11ac-CH 36)



Peak Excursion Ratio (802.11ac-CH 40)



FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P

Peak Excursion Ratio (802.11ac-CH 48)



Peak Excursion Ratio (802.11ac-CH 52)



FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P

Peak Excursion Ratio (802.11ac-CH 60)



Peak Excursion Ratio (802.11ac-CH 64)



FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P

Peak Excursion Ratio (802.11ac-CH 100)



Peak Excursion Ratio (802.11ac-CH 116)




FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNF0855P

Peak Excursion Ratio (802.11ac-CH 140)




FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P	

Peak Excursion Ratio (802.11n-CH 38)

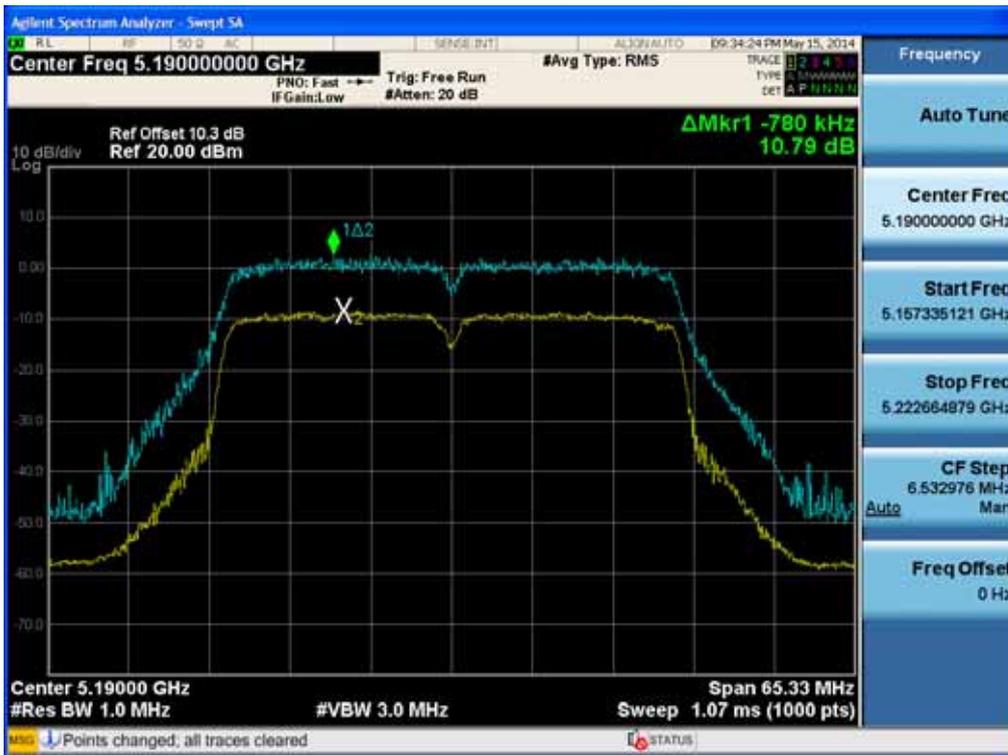

Peak Excursion Ratio (802.11n-CH 46)

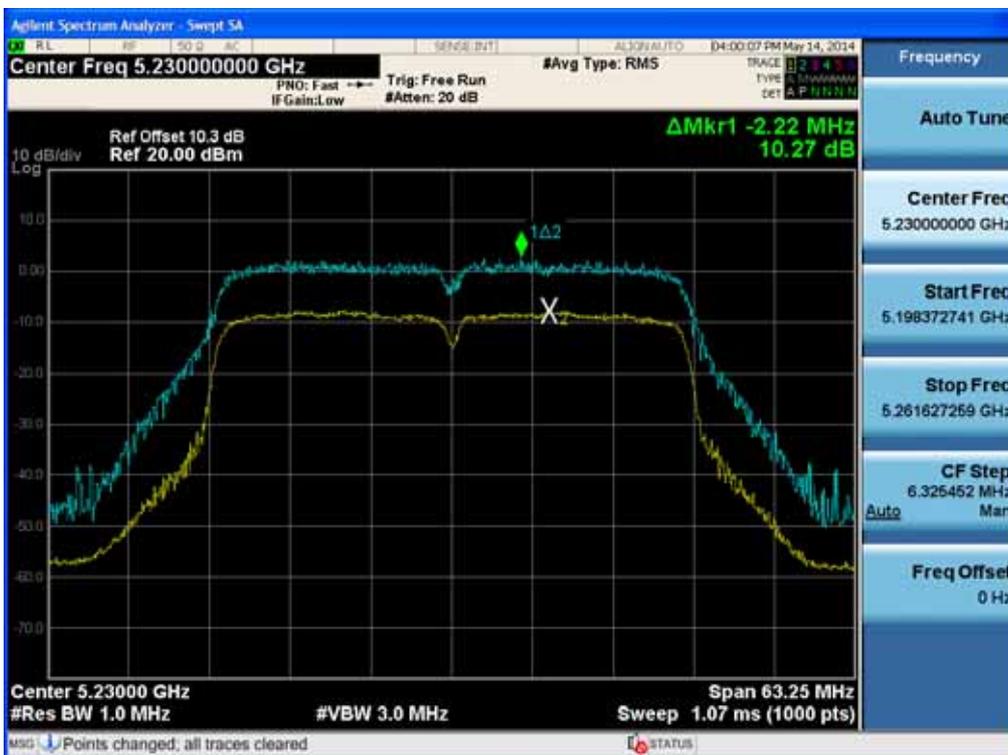


FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P	

Peak Excursion Ratio (802.11n-CH 54)




Peak Excursion Ratio (802.11n-CH 62)

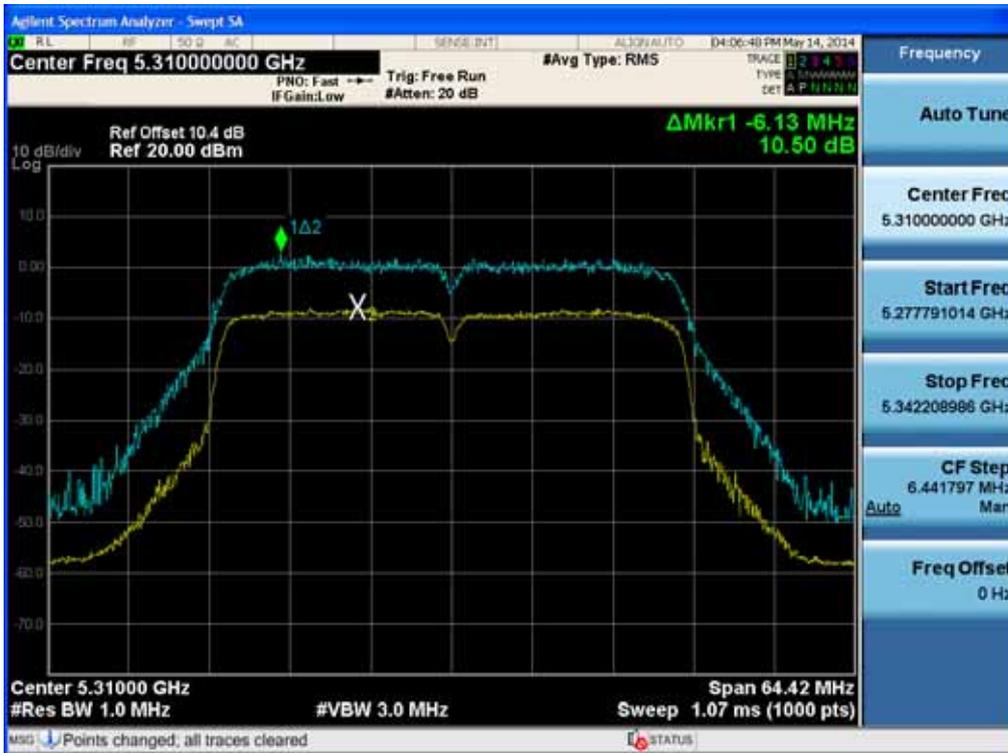


FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P

Peak Excursion Ratio (802.11n-CH 102)

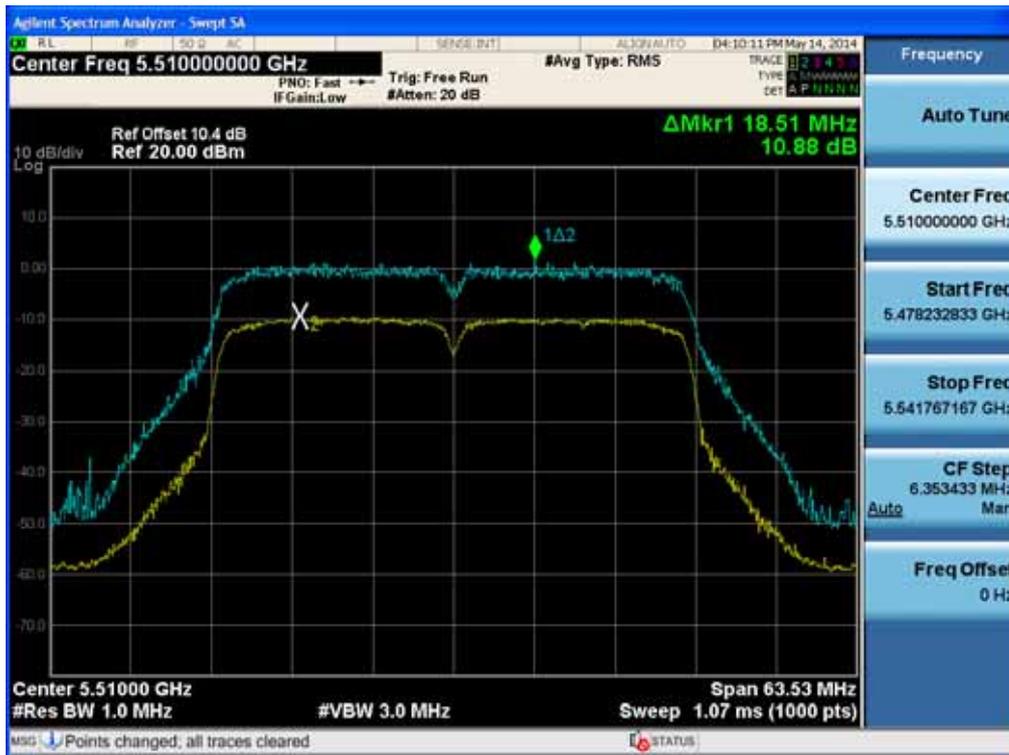


Peak Excursion Ratio (802.11n-CH 110)

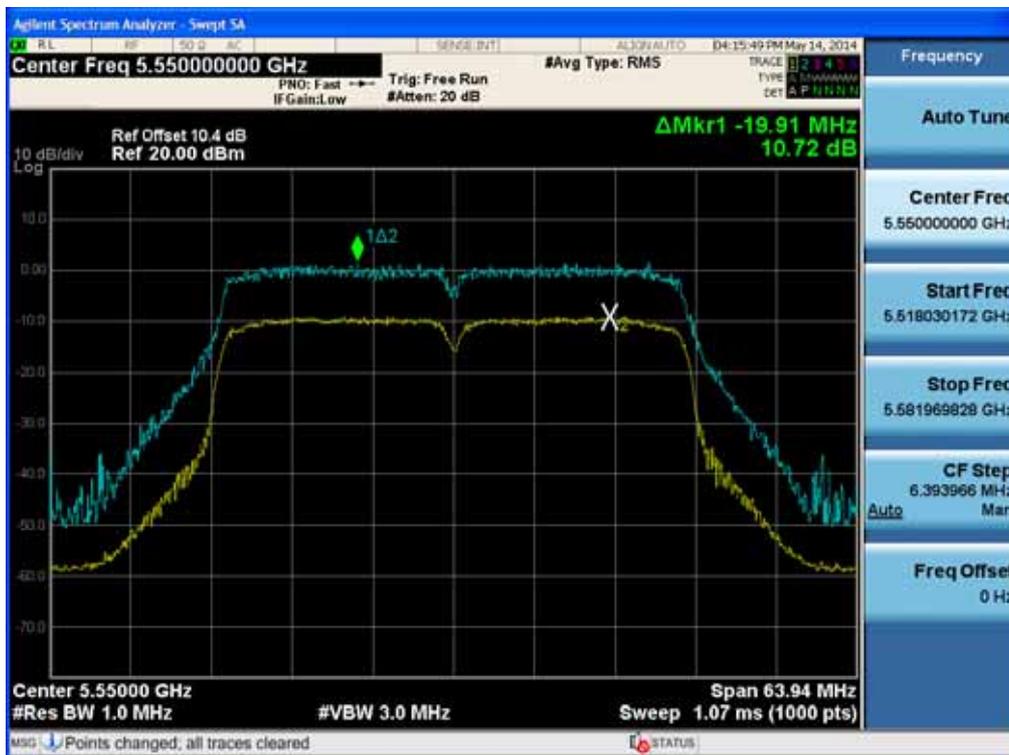


FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P

Peak Excursion Ratio (802.11n-CH 134)

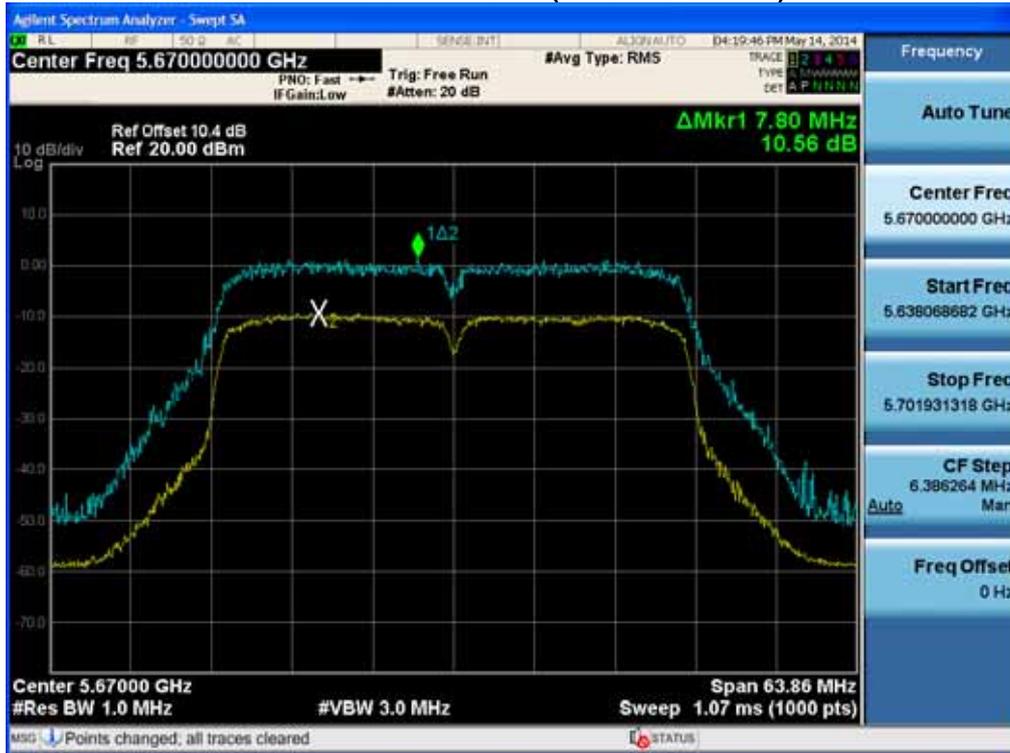


FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P	

Peak Excursion Ratio (802.11ac-CH 38)

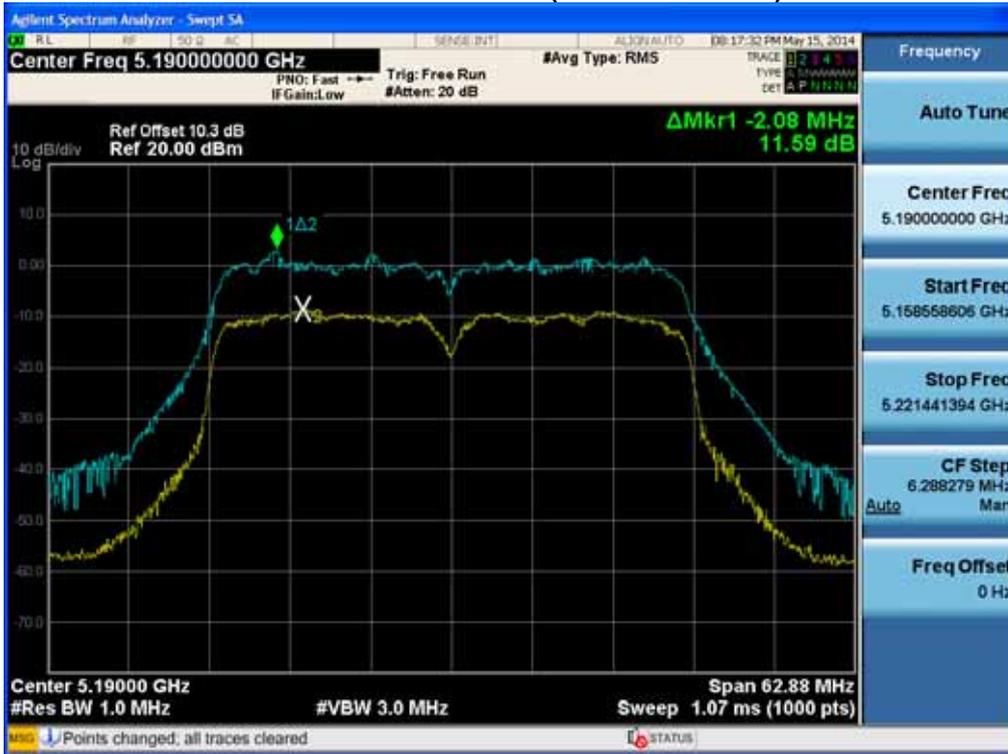

Peak Excursion Ratio (802.11ac-CH 46)

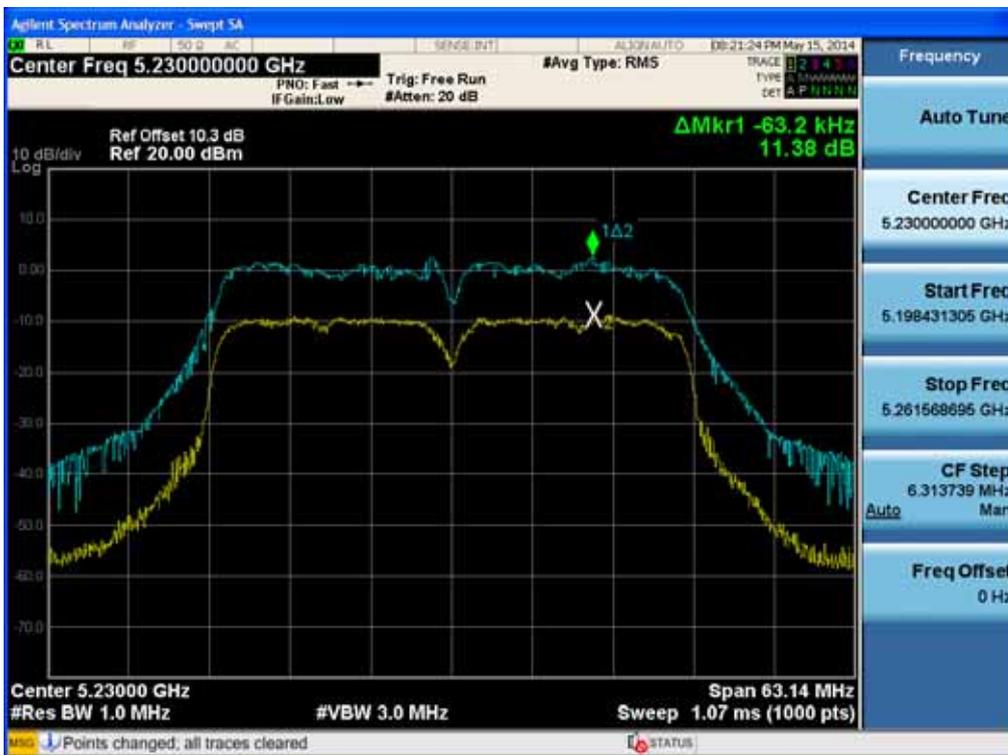


FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P

Peak Excursion Ratio (802.11ac-CH 54)



Peak Excursion Ratio (802.11ac-CH 62)

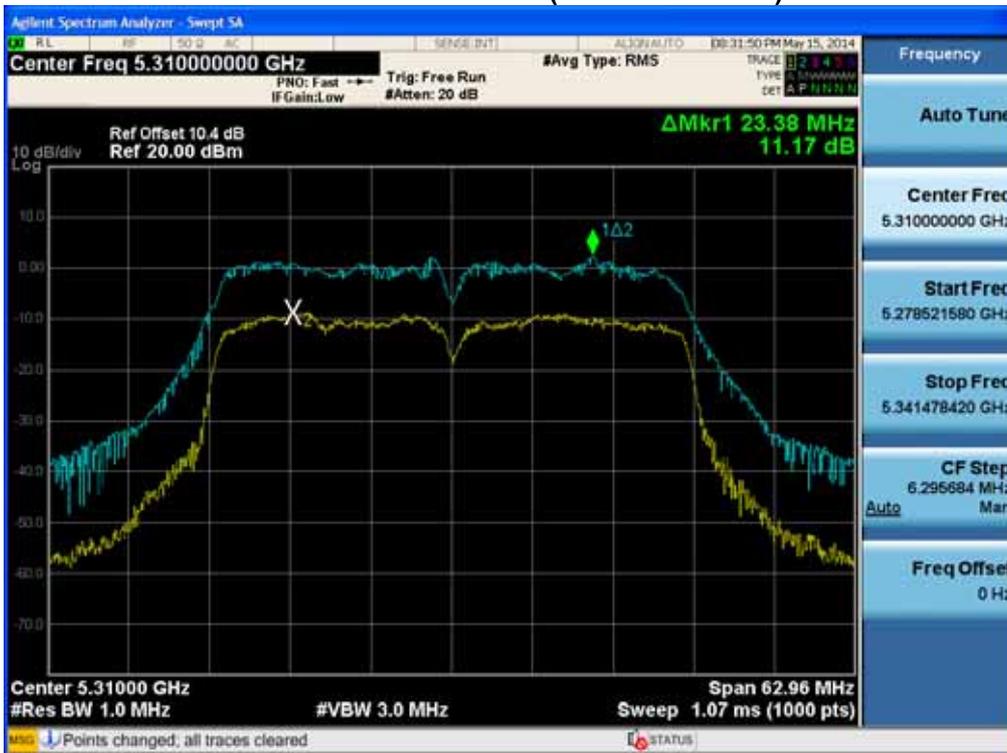

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P

Peak Excursion Ratio (802.11ac-CH 102)



Peak Excursion Ratio (802.11ac-CH 110)



FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P

Peak Excursion Ratio (802.11ac-CH 134)



FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P

Peak Excursion Ratio (802.11ac-CH 42)



Peak Excursion Ratio (802.11ac-CH 58)



FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNF0855P

Peak Excursion Ratio (802.11ac-CH 106)



Peak Excursion Ratio (802.11ac-CH 138)



FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



8.6 FREQUENCY STABILITY.

The EUT was placed inside an environmental chamber as the temperature in the chamber was varied between -30 and 50 . The temperature was incremented by 10 intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.

20 MHz BW

OPERATING BAND: UNII Band 1
 OPERATING FREQUENCY: 5,180,000,000 Hz
 CHANNEL: 36
 REFERENCE VOLTAGE: 3.8 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.80	+20(Ref)	5 180 008.70	0
100%		-30	5 180 002.20	-6.50
100%		-20	5 180 003.90	-4.80
100%		-10	5 180 005.80	-2.90
100%		0	5 180 007.47	-1.23
100%		10	5 180 012.28	3.58
100%		30	5 180 017.85	9.15
100%		40	5 180 019.05	10.35
100%		50	5 180 020.56	11.86
115%		4.37	20	5 180 021.31
Batt. Endpoint	3.23	20	5 180 014.88	6.18

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



OPERATING BAND: UNII Band 2
 OPERATING FREQUENCY: 5,260,000,000 Hz
 CHANNEL: 52
 REFERENCE VOLTAGE: 3.8 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.80	+20(Ref)	5 260 008.60	0.00
100%		-30	5 260 003.26	-5.34
100%		-20	5 260 004.66	-3.94
100%		-10	5 260 005.50	-3.1
100%		0	5 260 006.42	-2.18
100%		+10	5 260 013.46	4.86
100%		+30	5 260 017.22	8.62
100%		+40	5 260 019.08	10.48
100%		+50	5 260 020.78	12.18
115%		4.37	+20	5 260 022.24
Batt. Endpoint	3.23	+20	5 260 014.44	5.84

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



OPERATING BAND: UNII Band 3
 OPERATING FREQUENCY: 5,550,000,000 Hz
 CHANNEL: 100
 REFERENCE VOLTAGE: 3.8 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.80	+20(Ref)	5 500 008.30	0.00
100%		-30	5 500 001.12	-7.18
100%		-20	5 500 005.13	-3.17
100%		-10	5 500 006.17	-2.13
100%		0	5 500 006.63	-1.67
100%		+10	5 500 014.81	6.51
100%		+30	5 500 018.45	10.15
100%		+40	5 500 020.64	12.34
100%		+50	5 500 022.16	13.86
115%	4.37	+20	5 500 022.98	14.68
Batt. Endpoint	3.23	+20	5 500 014.84	6.54

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNF0855P



40 MHz BW

OPERATING BAND: UNII Band 1
 OPERATING FREQUENCY: 5,190,000,000 Hz
 CHANNEL: 38
 REFERENCE VOLTAGE: 3.8 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.80	+20(Ref)	5 190 007.70	0.00
100%		-30	5 190 003.02	-4.68
100%		-20	5 190 005.23	-2.47
100%		-10	5 190 006.15	-1.55
100%		0	5 190 008.55	0.85
100%		+10	5 190 013.54	5.84
100%		+30	5 190 015.85	8.15
100%		+40	5 190 017.96	10.26
100%		+50	5 190 020.57	12.87
115%	4.37	+20	5 190 022.05	14.35
Batt. Endpoint	3.23	+20	5 190 013.57	5.87

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



OPERATING BAND: UNII Band 2
 OPERATING FREQUENCY: 5,270,000,000 Hz
 CHANNEL: 54
 REFERENCE VOLTAGE: 3.8 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.80	+20(Ref)	5 270 006.90	0.00
100%		-30	5 270 001.72	-5.18
100%		-20	5 270 004.04	-2.86
100%		-10	5 270 005.21	-1.69
100%		0	5 270 008.15	1.25
100%		+10	5 270 011.57	4.67
100%		+30	5 270 014.43	7.53
100%		+40	5 270 017.23	10.33
100%		+50	5 270 018.17	11.27
115%	4.37	+20	5 270 020.84	13.94
Batt. Endpoint	3.23	+20	5 270 011.04	4.14

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



OPERATING BAND: UNII Band 3
 OPERATING FREQUENCY: 5,510,000,000 Hz
 CHANNEL: 102
 REFERENCE VOLTAGE: 3.8 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.80	+20(Ref)	5 510 006.80	0.00
100%		-30	5 510 001.36	-5.44
100%		-20	5 510 004.33	-2.47
100%		-10	5 510 005.75	-1.05
100%		0	5 510 008.28	1.48
100%		+10	5 510 012.11	5.31
100%		+30	5 510 013.97	7.17
100%		+40	5 510 016.15	9.35
100%		+50	5 510 018.17	11.37
115%	4.37	+20	5 510 020.22	13.42
Batt. Endpoint	3.23	+20	5 510 011.75	4.95

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



80 MHz BW

OPERATING BAND: UNII Band 1
 OPERATING FREQUENCY: 5,210,000,000 Hz
 CHANNEL: 42
 REFERENCE VOLTAGE: 3.8 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.80	+20(Ref)	5 210 006.40	0.00
100%		-30	5 210 001.17	-5.23
100%		-20	5 210 003.72	-2.68
100%		-10	5 210 005.27	-1.13
100%		0	5 210 007.93	1.53
100%		+10	5 210 011.38	4.98
100%		+30	5 210 013.34	6.94
100%		+40	5 210 016.55	10.15
100%		+50	5 210 019.02	12.62
115%	4.37	+20	5 210 019.54	13.14
Batt. Endpoint	3.23	+20	5 210 011.58	5.18

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



OPERATING BAND: UNII Band 2
 OPERATING FREQUENCY: 5,290,000,000 Hz
 CHANNEL: 58
 REFERENCE VOLTAGE: 3.8 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.80	+20(Ref)	5 290 006.50	0.00
100%		-30	5 290 002.32	-4.18
100%		-20	5 290 003.86	-2.64
100%		-10	5 290 005.39	-1.11
100%		0	5 290 008.65	2.15
100%		+10	5 290 011.39	4.89
100%		+30	5 290 014.08	7.58
100%		+40	5 290 015.14	8.64
100%		+50	5 290 018.78	12.28
115%	4.37	+20	5 290 019.64	13.14
Batt. Endpoint	3.23	+20	5 290 012.39	5.89

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



OPERATING BAND: UNII Band 3
 OPERATING FREQUENCY: 5,530,000,000 Hz
 CHANNEL: 100
 REFERENCE VOLTAGE: 3.8 VDC

Voltage (%)	Power (VDC)	Temp. ()	Frequency (kHz)	Frequency Error (kHz)
100%	3.80	+20(Ref)	5 530 006.50	0.00
100%		-30	5 530 002.21	-4.29
100%		-20	5 530 004.04	-2.46
100%		-10	5 530 005.32	-1.18
100%		0	5 530 008.17	1.67
100%		+10	5 530 010.89	4.39
100%		+30	5 530 013.35	6.85
100%		+40	5 530 016.76	10.26
100%		+50	5 530 018.25	11.75
115%		4.37	+20	5 530 018.61
Batt. Endpoint	3.23	+20	5 530 013.08	6.58

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.



8.7 RADIATED MEASUREMENT

8.7.1 RADIATED SPURIOUS EMISSIONS.

Test Requirements and limit, §15.205, §15.209, §15.407

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


§15.407, KDB 789033

All harmonics that do not lie in a restricted band are subject to a peak limit of -27 dBm/MHz. At a distance of 3 meters the field strength limit in dBµV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions of 68.2 dBµV/m.


FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P

Test Configuration


Below 30 MHz

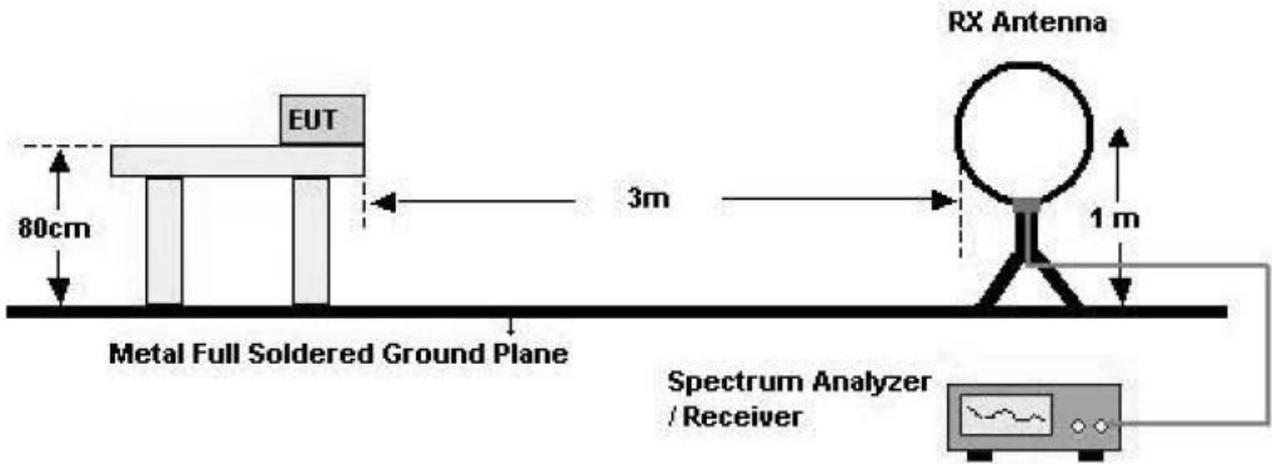

30 MHz - 1 GHz

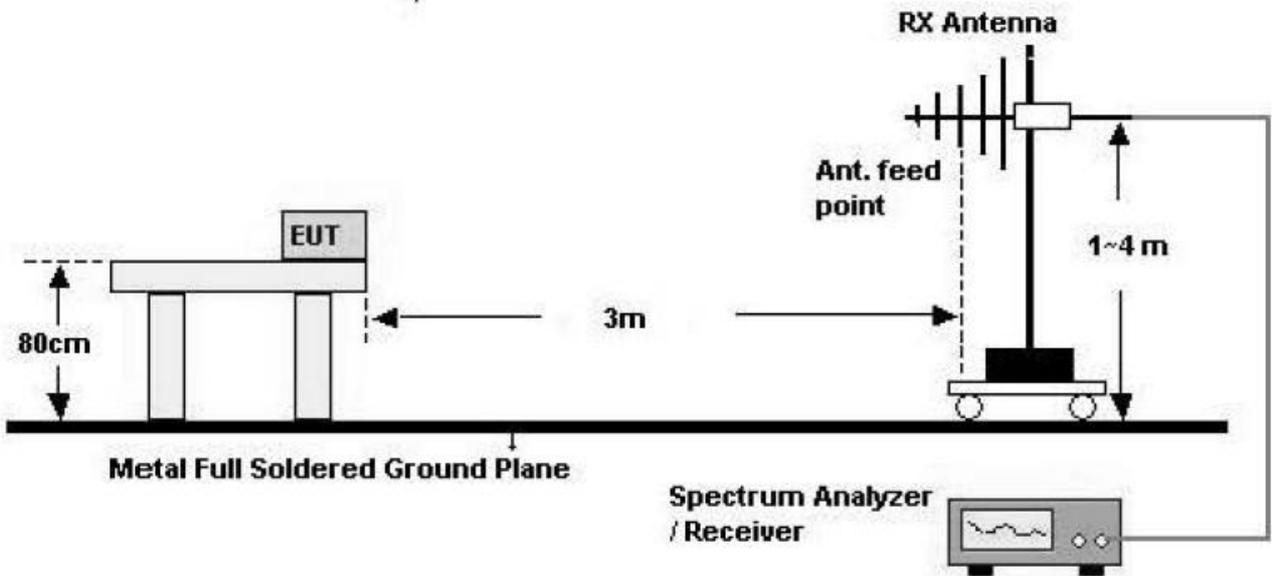

Above 1 GHz

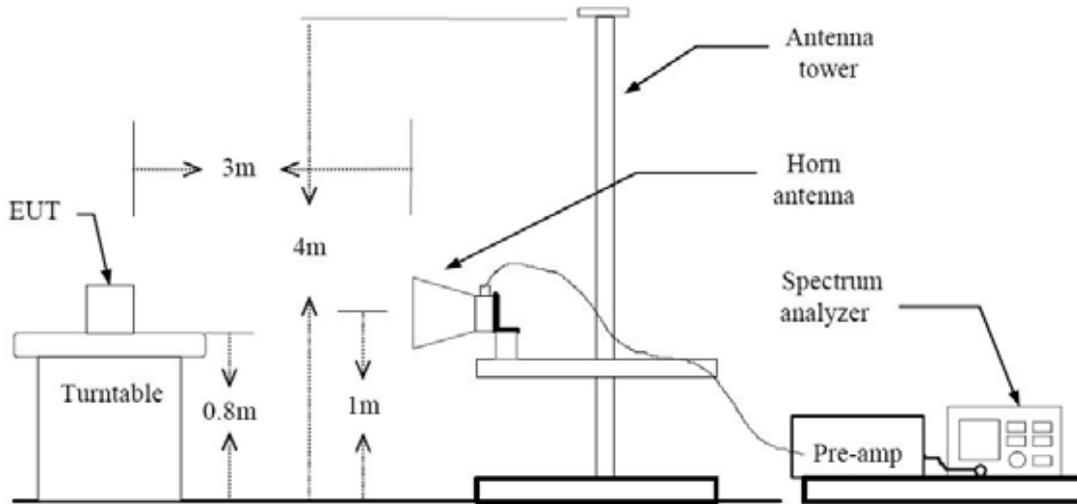

TEST PROCEDURE USED

ANSI C63.4(2003)

Method H)5) in KDB 789033, issued 04/08/2013 (Peak)

Method H)6)d) in KDB 789033, issued 04/08/2013 (Average)

. Spectrum setting:

- Peak.

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = Peak
4. Sweep Time = auto
5. Trace mode = max hold
6. Allow sweeps to continue until the trace stabilizes.
7. Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately 1/x, where x is the duty cycle.

- Average (Method VB :Averaging using reduced video bandwidth)

1. RBW = 1 MHz
2. VBW
 - 2.1. If the EUT is configured to transmit with duty cycle \geq 98 percent, set VBW \leq RBW/100(i.e., 10 kHz) but not less than 10 Hz.
 - 2.2. If the EUT duty cycle is < 98 percent, set VBW \geq 1/T, where T is the minimum transmission duration.
3. The analyzer is set to linear detector mode.
4. Detector = Peak.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P

5. Sweep time = auto.
6. Trace mode = max hold.
7. Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of 1/x, where x is the duty cycle.

Note :

1. We used the case 2 for 802.11a/n_20/n_40/ac_20/ac_40/ac_80 to perform the average field strength measurements for RSE and radiated band edge test.
2. The actual setting value of VBW for 802.11a/n_20/n_40/ac_20/ac_40/ac_80.
3. We applied the 15.407 for Ch.144, 142 and 138 in 802.11ac according to KDB 644545 D01 v01r01.

Mode	Worst Data rate (Mbps)	T _{on} (ms)	T _{total} (ms)	Duty Cycle (%)	VBW(1/T) (Hz)	The actual setting value of VBW (Hz)
a	6	2.019	2.132	94.70	495	1000
n_20	6.5	1.861	1.966	94.66	537	1000
n_40	13.5	0.910	1.022	89.04	1099	3000
ac_20	6.5	0.972	1.074	90.50	1029	1000
ac_40	13.5	0.490	0.592	82.77	2041	3000
ac_80	29.3	0.247	0.347	71.18	4049	3000



TEST RESULTS

9 kHz – 30MHz

Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB /m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 9 kHz to the 30MHz.
2. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
3. Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
4. Limit line = specific Limits (dBuV) + Distance extrapolation factor
5. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



TEST RESULTS

Below 1 GHz

Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB /m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 30 MHz to the 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



Stand alone
Above 1 GHz

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10360	48.23	9.33	V	57.56	68.20	10.64	PK
15540	44.32	14.61	V	58.93	73.98	15.05	PK
15540	30.71	14.61	V	45.32	53.98	8.66	AV
10360	50.00	9.33	H	59.33	68.20	8.87	PK
15540	44.34	14.61	H	58.95	73.98	15.03	PK
15540	30.72	14.61	H	45.33	53.98	8.65	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P



Band : UNII 1
 Operation Mode: 802.11 a
 Transfer Rate: 6 Mbps
 Operating Frequency 5200 MHz
 Channel No. 40 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10400	48.12	10.13	V	58.25	68.20	9.95	PK
15600	45.13	14.60	V	59.73	73.98	14.25	PK
15600	31.13	14.60	V	45.73	53.98	8.25	AV
10400	49.85	10.13	H	59.98	68.20	8.22	PK
15600	45.28	14.60	H	59.88	73.98	14.10	PK
15600	31.14	14.60	H	45.74	53.98	8.24	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNF0855P



Band : UNII 1
 Operation Mode: 802.11 a
 Transfer Rate: 6 Mbps
 Operating Frequency 5240 MHz
 Channel No. 48 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10480	48.10	10.20	V	58.30	68.20	9.90	PK
15720	46.09	13.47	V	59.56	73.98	14.42	PK
15720	32.24	13.47	V	45.71	53.98	8.27	AV
10480	50.17	10.20	H	60.37	68.20	7.83	PK
15720	46.16	13.47	H	59.63	73.98	14.35	PK
15720	32.25	13.47	H	45.72	53.98	8.26	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNF0855P



Band :	UNII 1
Operation Mode:	802.11 n_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10360	48.12	9.33	V	57.45	68.20	10.75	PK
15540	44.36	14.61	V	58.97	73.98	15.01	PK
15540	30.78	14.61	V	45.39	53.98	8.59	AV
10360	49.43	9.33	H	58.76	68.20	9.44	PK
15540	44.74	14.61	H	59.35	73.98	14.63	PK
15540	30.83	14.61	H	45.44	53.98	8.54	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_20 MHz BW. Worst case is 6.5 Mbps in 802.11n_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNF0855P



Band :	UNII 1
Operation Mode:	802.11 n_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5200 MHz
Channel No.	40 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10400	44.21	10.13	V	54.34	68.20	13.86	PK
15600	44.86	14.60	V	59.46	73.98	14.52	PK
15600	31.05	14.60	V	45.65	53.98	8.33	AV
10400	45.62	10.13	H	55.75	68.20	12.45	PK
15600	45.13	14.60	H	59.73	73.98	14.25	PK
15600	31.11	14.60	H	45.71	53.98	8.27	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_20 MHz BW. Worst case is 6.5 Mbps in 802.11n_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNF0855P



Band : UNII 1
 Operation Mode: 802.11 n_20 MHz BW
 Transfer Rate: 6.5 Mbps
 Operating Frequency 5240 MHz
 Channel No. 48 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10480	48.15	10.20	V	58.35	68.20	9.85	PK
15720	45.97	13.47	V	59.44	73.98	14.54	PK
15720	32.11	13.47	V	45.58	53.98	8.40	AV
10480	49.68	10.20	H	59.88	68.20	8.32	PK
15720	46.17	13.47	H	59.64	73.98	14.34	PK
15720	32.11	13.47	H	45.58	53.98	8.40	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_20 MHz BW. Worst case is 6.5 Mbps in 802.11n_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNF0855P



Band :	UNII 1
Operation Mode:	802.11 ac_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10360	43.27	9.33	V	52.60	68.20	15.60	PK
15540	44.35	14.61	V	58.96	73.98	15.02	PK
15540	31.69	14.61	V	46.30	53.98	7.68	AV
10360	43.55	9.33	H	52.88	68.20	15.32	PK
15540	44.51	14.61	H	59.12	73.98	14.86	PK
15540	31.70	14.61	H	46.31	53.98	7.67	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_20 MHz BW. Worst case is 6.5 Mbps in 802.11ac_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 1
Operation Mode:	802.11 ac_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5200 MHz
Channel No.	40 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10400	42.95	10.13	V	53.08	68.20	15.12	PK
15600	44.91	14.60	V	59.51	73.98	14.47	PK
15600	31.76	14.60	V	46.36	53.98	7.62	AV
10400	43.29	10.13	H	53.42	68.20	14.78	PK
15600	45.02	14.60	H	59.62	73.98	14.36	PK
15600	31.78	14.60	H	46.38	53.98	7.60	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_20 MHz BW. Worst case is 6.5 Mbps in 802.11ac_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



Band : UNII 1
 Operation Mode: 802.11 ac_20 MHz BW
 Transfer Rate: 6.5 Mbps
 Operating Frequency 5240 MHz
 Channel No. 48 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10480	43.05	10.20	V	53.25	68.20	14.95	PK
15720	46.23	13.47	V	59.70	73.98	14.28	PK
15720	32.94	13.47	V	46.41	53.98	7.57	AV
10480	43.37	10.20	H	53.57	68.20	14.63	PK
15720	46.32	13.47	H	59.79	73.98	14.19	PK
15720	33.00	13.47	H	46.47	53.98	7.51	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_20 MHz BW. Worst case is 6.5 Mbps in 802.11ac_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 1
Operation Mode:	802.11n_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5190 MHz
Channel No.	38 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10380	45.16	9.70	V	54.86	68.20	13.34	PK
15570	44.37	14.62	V	58.99	73.98	14.99	PK
15570	31.71	14.62	V	46.33	53.98	7.65	AV
10380	47.22	9.70	H	56.92	68.20	11.28	PK
15570	44.48	14.62	H	59.10	73.98	14.88	PK
15570	31.71	14.62	H	46.33	53.98	7.65	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_40 MHz BW. Worst case is 13.5 Mbps in 802.11n_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 1
Operation Mode:	802.11n_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5230 MHz
Channel No.	46 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10460	40.22	10.26	V	50.48	68.20	17.72	PK
15690	46.36	14.33	V	60.69	73.98	13.29	PK
15690	32.78	14.33	V	47.11	53.98	6.87	AV
10460	42.95	10.26	H	53.21	68.20	14.99	PK
15690	46.58	14.33	H	60.91	73.98	13.07	PK
15690	32.82	14.33	H	47.15	53.98	6.83	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_40 MHz BW. Worst case is 13.5 Mbps in 802.11n_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 1
Operation Mode:	802.11ac_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5190 MHz
Channel No.	38 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10380	45.04	9.70	V	54.74	68.20	13.46	PK
15570	44.39	14.62	V	59.01	73.98	14.97	PK
15570	31.83	14.62	V	46.45	53.98	7.53	AV
10380	47.31	9.70	H	57.01	68.20	11.19	PK
15570	44.52	14.62	H	59.14	73.98	14.84	PK
15570	31.86	14.62	H	46.48	53.98	7.50	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_40 MHz BW. Worst case is 13.5 Mbps in 802.11ac_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



Band :	UNII 1
Operation Mode:	802.11ac_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5230 MHz
Channel No.	46 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10460	44.73	10.26	V	54.99	68.20	13.21	PK
15690	46.06	14.33	V	60.39	73.98	13.59	PK
15690	32.83	14.33	V	47.16	53.98	6.82	AV
10460	47.49	10.26	H	57.75	68.20	10.45	PK
15690	46.67	14.33	H	61.00	73.98	12.98	PK
15690	32.86	14.33	H	47.19	53.98	6.79	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_40 MHz BW. Worst case is 13.5 Mbps in 802.11ac_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



Band :	UNII 1
Operation Mode:	802.11ac_80 MHz BW
Transfer Rate:	29.3 Mbps
Operating Frequency	5210 MHz
Channel No.	42 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10420	44.66	10.43	V	55.09	68.20	13.11	PK
15630	45.44	14.15	V	59.59	73.98	14.39	PK
15630	33.65	14.15	V	47.80	53.98	6.18	AV
10420	46.75	10.43	H	57.18	68.20	11.02	PK
15630	45.70	14.15	H	59.85	73.98	14.13	PK
15630	33.67	14.15	H	47.82	53.98	6.16	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_80 MHz BW. Worst case is 29.3 Mbps in 802.11ac_80 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



Band :	UNII 2
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5260 MHz
Channel No.	52 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10520	49.01	10.38	V	59.39	68.20	8.81	PK
15780	46.18	14.38	V	60.56	73.98	13.42	PK
15780	31.92	14.38	V	46.30	53.98	7.68	AV
10520	50.13	10.38	H	60.51	68.20	7.69	PK
15780	46.21	14.38	H	60.59	73.98	13.39	PK
15780	31.96	14.38	H	46.34	53.98	7.64	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 2
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5300 MHz
Channel No.	60 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10600	44.30	10.39	V	54.69	73.98	19.29	PK
10600	37.10	10.39	V	47.49	53.98	6.49	AV
15900	44.62	14.00	V	58.62	73.98	15.36	PK
15900	30.42	14.00	V	44.42	53.98	9.56	AV
10600	45.72	10.39	H	56.11	73.98	17.87	PK
10600	38.30	10.39	H	48.69	53.98	5.29	AV
15900	44.70	14.00	H	58.70	73.98	15.28	PK
15900	30.51	14.00	H	44.51	53.98	9.47	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



Band :	UNII 2
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5320 MHz
Channel No.	64 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10640	44.12	10.50	V	54.62	73.98	19.36	PK
10640	36.51	10.50	V	47.01	53.98	6.97	AV
15960	44.16	14.27	V	58.43	73.98	15.55	PK
15960	30.22	14.27	V	44.49	53.98	9.49	AV
10640	45.23	10.50	H	55.73	73.98	18.25	PK
10640	37.71	10.50	H	48.21	53.98	5.77	AV
15960	44.23	14.27	H	58.50	73.98	15.48	PK
15960	30.23	14.27	H	44.50	53.98	9.48	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 2
Operation Mode:	802.11 n_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5260 MHz
Channel No.	52 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10520	48.24	10.38	V	58.62	68.20	9.58	PK
15780	45.91	14.38	V	60.29	73.98	13.69	PK
15780	31.96	14.38	V	46.34	53.98	7.64	AV
10520	49.74	10.38	H	60.12	68.20	8.08	PK
15780	46.16	14.38	H	60.54	73.98	13.44	PK
15780	31.96	14.38	H	46.34	53.98	7.64	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_20 MHz BW. Worst case is 6.5 Mbps in 802.11n_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNF0855P



Band :	UNII 2
Operation Mode:	802.11 n_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5300 MHz
Channel No.	60 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10600	42.81	10.39	V	53.20	73.98	20.78	PK
10600	37.05	10.39	V	47.44	53.98	6.54	AV
15900	44.64	14.00	V	58.64	73.98	15.34	PK
15900	30.47	14.00	V	44.47	53.98	9.51	AV
10600	44.91	10.39	H	55.30	73.98	18.68	PK
10600	38.10	10.39	H	48.49	53.98	5.49	AV
15900	44.93	14.00	H	58.93	73.98	15.05	PK
15900	30.50	14.00	H	44.50	53.98	9.48	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_20 MHz BW. Worst case is 6.5 Mbps in 802.11n_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band : UNII 2
 Operation Mode: 802.11 n_20 MHz BW
 Transfer Rate: 6.5 Mbps
 Operating Frequency 5320 MHz
 Channel No. 64 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10640	44.25	10.50	V	54.75	73.98	19.23	PK
10640	36.05	10.50	V	46.55	53.98	7.43	AV
15960	44.34	14.27	V	58.61	73.98	15.37	PK
15960	30.20	14.27	V	44.47	53.98	9.51	AV
10640	45.89	10.50	H	56.39	73.98	17.59	PK
10640	37.60	10.50	H	48.10	53.98	5.88	AV
15960	44.51	14.27	H	58.78	73.98	15.20	PK
15960	30.22	14.27	H	44.49	53.98	9.49	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_20 MHz BW. Worst case is 6.5 Mbps in 802.11n_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band : UNII 2
 Operation Mode: 802.11 ac_20 MHz BW
 Transfer Rate: 6.5 Mbps
 Operating Frequency 5260 MHz
 Channel No. 52 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10520	42.87	10.38	V	53.25	68.20	14.95	PK
15780	45.84	14.38	V	60.22	73.98	13.76	PK
15780	32.61	14.38	V	46.99	53.98	6.99	AV
10520	43.05	10.38	H	53.43	68.20	14.77	PK
15780	46.21	14.38	H	60.59	73.98	13.39	PK
15780	32.67	14.38	H	47.05	53.98	6.93	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_20 MHz BW. Worst case is 6.5 Mbps in 802.11ac_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band : UNII 2
 Operation Mode: 802.11 ac_20 MHz BW
 Transfer Rate: 6.5 Mbps
 Operating Frequency 5300 MHz
 Channel No. 60 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10600	42.46	10.39	V	52.85	73.98	21.13	PK
10600	34.86	10.39	V	45.25	53.98	8.73	AV
15900	44.53	14.00	V	58.53	73.98	15.45	PK
15900	31.47	14.00	V	45.47	53.98	8.51	AV
10600	42.68	10.39	H	53.07	73.98	20.91	PK
10600	35.19	10.39	H	45.58	53.98	8.40	AV
15900	44.55	14.00	H	58.55	73.98	15.43	PK
15900	31.48	14.00	H	45.48	53.98	8.50	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_20 MHz BW. Worst case is 6.5 Mbps in 802.11ac_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 2
Operation Mode:	802.11 ac_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5320 MHz
Channel No.	64 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10640	41.03	10.50	V	51.53	73.98	22.45	PK
10640	34.94	10.50	V	45.44	53.98	8.54	AV
15960	44.43	14.27	V	58.70	73.98	15.28	PK
15960	31.12	14.27	V	45.39	53.98	8.59	AV
10640	41.12	10.50	H	51.62	73.98	22.36	PK
10640	35.06	10.50	H	45.56	53.98	8.42	AV
15960	44.68	14.27	H	58.95	73.98	15.03	PK
15960	31.13	14.27	H	45.40	53.98	8.58	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_20 MHz BW. Worst case is 6.5 Mbps in 802.11ac_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 2
Operation Mode:	802.11n_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5270 MHz
Channel No.	54 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10540	46.05	10.55	V	56.60	68.20	11.60	PK
15810	45.04	14.26	V	59.30	73.98	14.68	PK
15810	32.47	14.26	V	46.73	53.98	7.25	AV
10540	48.79	10.55	H	59.34	68.20	8.86	PK
15810	45.21	14.26	H	59.47	73.98	14.51	PK
15810	32.51	14.26	H	46.77	53.98	7.21	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_40 MHz BW. Worst case is 13.5 Mbps in 802.11n_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 2
Operation Mode:	802.11n_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5310 MHz
Channel No.	62 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10620	43.55	10.25	V	53.80	73.98	20.18	PK
10620	36.81	10.25	V	47.06	53.98	6.92	AV
15930	44.07	13.62	V	57.69	73.98	16.29	PK
15930	31.08	13.62	V	44.70	53.98	9.28	AV
10620	43.82	10.25	H	54.07	73.98	19.91	PK
10620	37.03	10.25	H	47.28	53.98	6.70	AV
15930	44.23	13.62	H	57.85	73.98	16.13	PK
15930	30.09	13.62	H	43.71	53.98	10.27	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_40 MHz BW. Worst case is 13.5 Mbps in 802.11n_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 2
Operation Mode:	802.11ac_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5270 MHz
Channel No.	54 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10540	46.51	10.55	V	57.06	68.20	11.14	PK
15810	45.00	14.26	V	59.26	73.98	14.72	PK
15810	32.50	14.26	V	46.76	53.98	7.22	AV
10540	48.12	10.55	H	58.67	68.20	9.53	PK
15810	45.19	14.26	H	59.45	73.98	14.53	PK
15810	32.52	14.26	H	46.78	53.98	7.20	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_40 MHz BW. Worst case is 13.5 Mbps in 802.11ac_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF855P



Band : UNII 2
 Operation Mode: 802.11ac_40 MHz BW
 Transfer Rate: 13.5 Mbps
 Operating Frequency 5310 MHz
 Channel No. 62 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10620	42.51	10.25	V	52.76	73.98	21.22	PK
10620	35.12	10.25	V	45.37	53.98	8.61	AV
15930	44.09	13.62	V	57.71	73.98	16.27	PK
15930	31.06	13.62	V	44.68	53.98	9.30	AV
10620	43.92	10.25	H	54.17	73.98	19.81	PK
10620	36.38	10.25	H	46.63	53.98	7.35	AV
15930	44.22	13.62	H	57.84	73.98	16.14	PK
15930	31.10	13.62	H	44.72	53.98	9.26	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_40 MHz BW. Worst case is 13.5 Mbps in 802.11ac_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 2
Operation Mode:	802.11ac_80 MHz BW
Transfer Rate:	29.3 Mbps
Operating Frequency	5290 MHz
Channel No.	58 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10580	45.85	10.42	V	56.27	68.20	11.93	PK
15870	44.40	13.96	V	58.36	73.98	15.62	PK
15870	32.88	13.96	V	46.84	53.98	7.14	AV
10580	47.69	10.42	H	58.11	68.20	10.09	PK
15870	44.52	13.96	H	58.48	73.98	15.50	PK
15870	32.91	13.96	H	46.87	53.98	7.11	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_80 MHz BW. Worst case is 13.5 Mbps in 802.11ac_80 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



Band :	UNII 2e
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5500 MHz
Channel No.	100 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11000	52.85	11.28	V	64.13	73.98	9.85	PK
11000	36.89	11.28	V	48.17	53.98	5.81	AV
16500	45.10	14.19	V	59.29	68.20	8.91	PK
11000	54.21	11.28	H	65.49	73.98	8.49	PK
11000	38.63	11.28	H	49.91	53.98	4.07	AV
16500	45.20	14.19	H	59.39	68.20	8.81	PK

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P



Band :	UNII 2e
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5580 MHz
Channel No.	116 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11160	55.85	11.10	V	66.95	73.98	7.03	PK
11160	36.10	11.10	V	47.20	53.98	6.78	AV
16740	45.86	15.70	V	61.56	68.20	6.64	PK
11160	57.19	11.10	H	68.29	73.98	5.69	PK
11160	37.02	11.10	H	48.12	53.98	5.86	AV
16740	46.04	15.70	H	61.74	68.20	6.46	PK

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



Band :	UNII 2e
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5700 MHz
Channel No.	140 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11400	41.75	10.97	V	52.72	73.98	21.26	PK
11400	36.24	10.97	V	47.21	53.98	6.77	AV
17100	45.06	17.82	V	62.88	68.20	5.32	PK
11400	42.89	10.97	H	53.86	73.98	20.12	PK
11400	37.55	10.97	H	48.52	53.98	5.46	AV
17100	45.07	17.82	H	62.89	68.20	5.31	PK

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF855P



Band :	UNII 2e
Operation Mode:	802.11 n_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5500 MHz
Channel No.	100 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11000	42.81	11.28	V	54.09	73.98	19.89	PK
11000	37.02	11.28	V	48.30	53.98	5.68	AV
16500	45.30	14.19	V	59.49	68.20	8.71	PK
11000	44.03	11.28	H	55.31	73.98	18.67	PK
11000	38.46	11.28	H	49.74	53.98	4.24	AV
16500	45.55	14.19	H	59.74	68.20	8.46	PK

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_20 MHz BW. Worst case is 6.5 Mbps in 802.11n_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 2e
Operation Mode:	802.11 n_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5580 MHz
Channel No.	116 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11160	41.95	11.10	V	53.05	73.98	20.93	PK
11160	36.81	11.10	V	47.91	53.98	6.07	AV
16740	45.80	15.70	V	61.50	68.20	6.70	PK
11160	43.33	11.10	H	54.43	73.98	19.55	PK
11160	38.05	11.10	H	49.15	53.98	4.83	AV
16740	45.85	15.70	H	61.55	68.20	6.65	PK

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_20 MHz BW. Worst case is 6.5 Mbps in 802.11n_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 2e
Operation Mode:	802.11 n_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5700 MHz
Channel No.	140 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11400	43.02	10.97	V	53.99	73.98	19.99	PK
11400	36.85	10.97	V	47.82	53.98	6.16	AV
17100	45.56	17.82	V	63.38	68.20	4.82	PK
11400	44.51	10.97	H	55.48	73.98	18.50	PK
11400	38.11	10.97	H	49.08	53.98	4.90	AV
17100	46.43	17.82	H	64.25	68.20	3.95	PK

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_20 MHz BW. Worst case is 6.5 Mbps in 802.11n_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 2e
Operation Mode:	802.11 ac_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5500 MHz
Channel No.	100 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11000	42.51	11.28	V	53.79	73.98	20.19	PK
11000	37.02	11.28	V	48.30	53.98	5.68	AV
16500	45.42	14.19	V	59.61	68.20	8.59	PK
11000	43.82	11.28	H	55.10	73.98	18.88	PK
11000	38.40	11.28	H	49.68	53.98	4.30	AV
16500	45.53	14.19	H	59.72	68.20	8.48	PK

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_20 MHz BW. Worst case is 6.5 Mbps in 802.11ac_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



Band :	UNII 2e
Operation Mode:	802.11 ac_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5580 MHz
Channel No.	116 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11160	42.88	11.10	V	53.98	73.98	20.00	PK
11160	36.05	11.10	V	47.15	53.98	6.83	AV
16740	45.82	15.70	V	61.52	68.20	6.68	PK
11160	44.21	11.10	H	55.31	73.98	18.67	PK
11160	37.52	11.10	H	48.62	53.98	5.36	AV
16740	45.90	15.70	H	61.60	68.20	6.60	PK

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_20 MHz BW. Worst case is 6.5 Mbps in 802.11ac_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 2e
Operation Mode:	802.11 ac_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5720 MHz
Channel No.	140 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11440	42.08	10.97	V	53.05	73.98	20.93	PK
11440	36.54	10.97	V	47.51	53.98	6.47	AV
17160	45.32	17.82	V	63.14	68.20	5.06	PK
11440	43.81	10.97	H	54.78	73.98	19.20	PK
11440	37.94	10.97	H	48.91	53.98	5.07	AV
17160	45.55	17.82	H	63.37	68.20	4.83	PK

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_20 MHz BW. Worst case is 6.5 Mbps in 802.11ac_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. We applied the 15.407 for Ch.144 in 802.11ac according to KDB 644545 D01 v01r01.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 2e
Operation Mode:	802.11n_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5510 MHz
Channel No.	102 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11020	43.21	11.28	V	54.49	73.98	19.49	PK
11020	37.58	11.28	V	48.86	53.98	5.12	AV
16530	45.23	14.83	V	60.06	68.20	8.14	PK
11020	44.67	11.28	H	55.95	73.98	18.03	PK
11020	38.29	11.28	H	49.57	53.98	4.41	AV
16530	45.44	14.83	H	60.27	68.20	7.93	PK

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_40 MHz BW. Worst case is 13.5 Mbps in 802.11n_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



Band :	UNII 2e
Operation Mode:	802.11n_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5590 MHz
Channel No.	118 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11180	42.84	11.12	V	53.96	73.98	20.02	PK
11180	34.62	11.12	V	45.74	53.98	8.24	AV
16770	44.83	16.52	V	61.35	68.20	6.85	PK
11180	43.15	11.12	H	54.27	73.98	19.71	PK
11180	35.28	11.12	H	46.40	53.98	7.58	AV
16770	45.05	16.52	H	61.57	68.20	6.63	PK

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_40 MHz BW. Worst case is 13.5 Mbps in 802.11n_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 2e
Operation Mode:	802.11n_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5670 MHz
Channel No.	134 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11340	42.06	10.86	V	52.92	73.98	21.06	PK
11340	34.05	10.86	V	44.91	53.98	9.07	AV
17010	44.87	18.15	V	63.02	68.20	5.18	PK
11340	42.59	10.86	H	53.45	73.98	20.53	PK
11340	34.31	10.86	H	45.17	53.98	8.81	AV
17010	45.92	18.15	H	64.07	68.20	4.13	PK

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_40 MHz BW. Worst case is 13.5 Mbps in 802.11n_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 2e
Operation Mode:	802.11ac_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5510 MHz
Channel No.	102 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11020	42.95	11.28	V	54.23	73.98	19.75	PK
11020	36.88	11.28	V	48.16	53.98	5.82	AV
16530	44.97	14.83	V	59.80	68.20	8.40	PK
11020	44.21	11.28	H	55.49	73.98	18.49	PK
11020	38.11	11.28	H	49.39	53.98	4.59	AV
16530	45.68	14.83	H	60.51	68.20	7.69	PK

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_40 MHz BW. Worst case is 13.5 Mbps in 802.11ac_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P



Band :	UNII 2e
Operation Mode:	802.11ac_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5590 MHz
Channel No.	118 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11180	40.65	11.12	V	51.77	73.98	22.21	PK
11180	32.11	11.12	V	43.23	53.98	10.75	AV
16770	45.03	16.52	V	61.55	68.20	6.65	PK
11180	41.59	11.12	H	52.71	73.98	21.27	PK
11180	33.68	11.12	H	44.80	53.98	9.18	AV
16770	45.24	16.52	H	61.76	68.20	6.44	PK

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_40 MHz BW. Worst case is 13.5 Mbps in 802.11ac_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



Band :	UNII 2e
Operation Mode:	802.11ac_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5710 MHz
Channel No.	142 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11420	41.31	10.73	V	52.04	73.98	21.94	PK
11420	31.64	10.73	V	42.37	53.98	11.61	AV
17130	45.30	18.11	V	63.41	68.20	4.79	PK
11420	42.24	10.73	H	52.97	73.98	21.01	PK
11420	33.18	10.73	H	43.91	53.98	10.07	AV
17130	45.48	18.11	H	63.59	68.20	4.61	PK

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_40 MHz BW. Worst case is 13.5 Mbps in 802.11ac_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. We applied the 15.407 for Ch.142 in 802.11ac according to KDB 644545 D01 v01r01.

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



Band :	UNII 2e
Operation Mode:	802.11ac_80 MHz BW
Transfer Rate:	29.3 Mbps
Operating Frequency	5530 MHz
Channel No.	106 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11060	42.12	11.48	V	53.60	73.98	20.38	PK
11060	36.51	11.48	V	47.99	53.98	5.99	AV
16590	45.22	14.42	V	59.64	68.20	8.56	PK
11060	43.70	11.48	H	55.18	73.98	18.80	PK
11060	37.82	11.48	H	49.30	53.98	4.68	AV
16590	45.41	14.42	H	59.83	68.20	8.37	PK

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_80 MHz BW. Worst case is 13.5 Mbps in 802.11ac_80 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 2e
Operation Mode:	802.11ac_80 MHz BW
Transfer Rate:	29.3 Mbps
Operating Frequency	5690 MHz
Channel No.	138 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11380	43.49	11.05	V	54.54	73.98	19.44	PK
11380	33.49	11.05	V	44.54	53.98	9.44	AV
17070	45.35	18.08	V	63.43	68.20	4.77	PK
11380	45.09	11.05	H	56.14	73.98	17.84	PK
11380	35.95	11.05	H	47.00	53.98	6.98	AV
17070	45.44	18.08	H	63.52	68.20	4.68	PK

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_80 MHz BW. Worst case is 13.5 Mbps in 802.11ac_80 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna
7. We applied the 15.407 for Ch.138 in 802.11ac according to KDB 644545 D01 v01r01.

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



**With wireless charge pad
Above 1 GHz**

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10360	46.18	9.33	V	55.51	68.20	12.69	PK
15540	44.64	14.61	V	59.25	73.98	14.73	PK
15540	30.67	14.61	V	45.28	53.98	8.70	AV
10360	42.49	9.33	H	51.82	68.20	16.38	PK
15540	43.73	14.61	H	58.34	73.98	15.64	PK
15540	30.56	14.61	H	45.17	53.98	8.81	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P



Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5200 MHz
Channel No.	40 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10400	46.05	10.13	V	56.18	68.20	12.02	PK
15600	44.79	14.60	V	59.39	73.98	14.59	PK
15600	30.65	14.60	V	45.25	53.98	8.73	AV
10400	43.21	10.13	H	53.34	68.20	14.86	PK
15600	43.87	14.60	H	58.47	73.98	15.51	PK
15600	30.65	14.60	H	45.25	53.98	8.73	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNF855P



Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5240 MHz
Channel No.	48 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10480	45.59	10.20	V	55.79	68.20	12.41	PK
15720	44.65	13.47	V	58.12	73.98	15.86	PK
15720	30.63	13.47	V	44.10	53.98	9.88	AV
10480	43.18	10.20	H	53.38	68.20	14.82	PK
15720	43.77	13.47	H	57.24	73.98	16.74	PK
15720	30.45	13.47	H	43.92	53.98	10.06	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF855P



Band :	UNII 1
Operation Mode:	802.11 n_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10360	45.98	9.33	V	55.31	68.20	12.89	PK
15540	44.46	14.61	V	59.07	73.98	14.91	PK
15540	30.72	14.61	V	45.33	53.98	8.65	AV
10360	43.62	9.33	H	52.95	68.20	15.25	PK
15540	42.21	14.61	H	56.82	73.98	17.16	PK
15540	30.58	14.61	H	45.19	53.98	8.79	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_20 MHz BW. Worst case is 6.5 Mbps in 802.11n_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 1
Operation Mode:	802.11 n_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5200 MHz
Channel No.	40 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10400	45.32	10.13	V	55.45	68.20	12.75	PK
15600	44.21	14.60	V	58.81	73.98	15.17	PK
15600	30.71	14.60	V	45.31	53.98	8.67	AV
10400	43.72	10.13	H	53.85	68.20	14.35	PK
15600	43.51	14.60	H	58.11	73.98	15.87	PK
15600	30.58	14.60	H	45.18	53.98	8.80	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_20 MHz BW. Worst case is 6.5 Mbps in 802.11n_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNF0855P



Band :	UNII 1
Operation Mode:	802.11 n_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5240 MHz
Channel No.	48 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10480	45.18	10.20	V	55.38	68.20	12.82	PK
15720	45.92	13.47	V	59.39	73.98	14.59	PK
15720	30.81	13.47	V	44.28	53.98	9.70	AV
10480	43.29	10.20	H	53.49	68.20	14.71	PK
15720	43.81	13.47	H	57.28	73.98	16.70	PK
15720	30.73	13.47	H	44.20	53.98	9.78	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_20 MHz BW. Worst case is 6.5 Mbps in 802.11n_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 1
Operation Mode:	802.11 ac_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10360	45.46	9.33	V	54.79	68.20	13.41	PK
15540	44.08	14.61	V	58.69	73.98	15.29	PK
15540	30.81	14.61	V	45.42	53.98	8.56	AV
10360	43.85	9.33	H	53.18	68.20	15.02	PK
15540	42.56	14.61	H	57.17	73.98	16.81	PK
15540	30.72	14.61	H	45.33	53.98	8.65	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_20 MHz BW. Worst case is 6.5 Mbps in 802.11ac_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band : UNII 1
 Operation Mode: 802.11 ac_20 MHz BW
 Transfer Rate: 6.5 Mbps
 Operating Frequency 5200 MHz
 Channel No. 40 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10400	45.09	10.13	V	55.22	68.20	12.98	PK
15600	45.18	14.60	V	59.78	73.98	14.20	PK
15600	31.21	14.60	V	45.81	53.98	8.17	AV
10400	43.58	10.13	H	53.71	68.20	14.49	PK
15600	43.87	14.60	H	58.47	73.98	15.51	PK
15600	30.95	14.60	H	45.55	53.98	8.43	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_20 MHz BW. Worst case is 6.5 Mbps in 802.11ac_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 1
Operation Mode:	802.11 ac_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5240 MHz
Channel No.	48 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10480	45.26	10.20	V	55.46	68.20	12.74	PK
15720	45.85	13.47	V	59.32	73.98	14.66	PK
15720	32.24	13.47	V	45.71	53.98	8.27	AV
10480	43.59	10.20	H	53.79	68.20	14.41	PK
15720	43.58	13.47	H	57.05	73.98	16.93	PK
15720	31.58	13.47	H	45.05	53.98	8.93	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_20 MHz BW. Worst case is 6.5 Mbps in 802.11ac_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 1
Operation Mode:	802.11n_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5190 MHz
Channel No.	38 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10380	45.23	9.70	V	54.93	68.20	13.27	PK
15570	44.34	14.62	V	58.96	73.98	15.02	PK
15570	30.82	14.62	V	45.44	53.98	8.54	AV
10380	42.29	9.70	H	51.99	68.20	16.21	PK
15570	43.56	14.62	H	58.18	73.98	15.80	PK
15570	30.12	14.62	H	44.74	53.98	9.24	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_40 MHz BW. Worst case is 13.5 Mbps in 802.11n_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 1
Operation Mode:	802.11n_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5230 MHz
Channel No.	46 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10460	45.60	10.26	V	55.86	68.20	12.34	PK
15690	45.43	14.33	V	59.76	73.98	14.22	PK
15690	31.86	14.33	V	46.19	53.98	7.79	AV
10460	42.51	10.26	H	52.77	68.20	15.43	PK
15690	43.28	14.33	H	57.61	73.98	16.37	PK
15690	31.02	14.33	H	45.35	53.98	8.63	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_40 MHz BW. Worst case is 13.5 Mbps in 802.11n_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 1
Operation Mode:	802.11ac_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5190 MHz
Channel No.	38 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10380	44.56	9.70	V	54.26	68.20	13.94	PK
15570	44.39	14.62	V	59.01	73.98	14.97	PK
15570	30.69	14.62	V	45.31	53.98	8.67	AV
10380	42.28	9.70	H	51.98	68.20	16.22	PK
15570	42.18	14.62	H	56.80	73.98	17.18	PK
15570	30.12	14.62	H	44.74	53.98	9.24	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_40 MHz BW. Worst case is 13.5 Mbps in 802.11ac_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 1
Operation Mode:	802.11ac_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5230 MHz
Channel No.	46 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10460	45.87	10.26	V	56.13	68.20	12.07	PK
15690	45.70	14.33	V	60.03	73.98	13.95	PK
15690	31.88	14.33	V	46.21	53.98	7.77	AV
10460	43.28	10.26	H	53.54	68.20	14.66	PK
15690	42.19	14.33	H	56.52	73.98	17.46	PK
15690	30.95	14.33	H	45.28	53.98	8.70	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_40 MHz BW. Worst case is 13.5 Mbps in 802.11ac_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 1
Operation Mode:	802.11ac_80 MHz BW
Transfer Rate:	29.3 Mbps
Operating Frequency	5210 MHz
Channel No.	42 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10420	45.58	10.43	V	56.01	68.20	12.19	PK
15630	44.57	14.15	V	58.72	73.98	15.26	PK
15630	31.04	14.15	V	45.19	53.98	8.79	AV
10420	43.08	10.43	H	53.51	68.20	14.69	PK
15630	42.09	14.15	H	56.24	73.98	17.74	PK
15630	30.54	14.15	H	44.69	53.98	9.29	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_80 MHz BW. Worst case is 29.3 Mbps in 802.11ac_80 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF855P



Band :	UNII 2
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5260 MHz
Channel No.	52 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10520	44.83	10.38	V	55.21	68.20	12.99	PK
15780	45.17	14.38	V	59.55	73.98	14.43	PK
15780	31.86	14.38	V	46.24	53.98	7.74	AV
10520	42.12	10.38	H	52.50	68.20	15.70	PK
15780	44.51	14.38	H	58.89	73.98	15.09	PK
15780	31.24	14.38	H	45.62	53.98	8.36	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 2
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5300 MHz
Channel No.	60 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10600	43.76	10.39	V	54.15	73.98	19.83	PK
10600	36.72	10.39	V	47.11	53.98	6.87	AV
15900	44.49	14.00	V	58.49	73.98	15.49	PK
15900	30.35	14.00	V	44.35	53.98	9.63	AV
10600	41.54	10.39	H	51.93	73.98	22.05	PK
10600	34.15	10.39	H	44.54	53.98	9.44	AV
15900	43.15	14.00	H	57.15	73.98	16.83	PK
15900	30.74	14.00	H	44.74	53.98	9.24	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



Band : UNII 2
 Operation Mode: 802.11 a
 Transfer Rate: 6 Mbps
 Operating Frequency 5320 MHz
 Channel No. 64 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10640	44.04	10.50	V	54.54	73.98	19.44	PK
10640	36.80	10.50	V	47.30	53.98	6.68	AV
15960	43.78	14.27	V	58.05	73.98	15.93	PK
15960	30.21	14.27	V	44.48	53.98	9.50	AV
10640	43.72	10.50	H	54.22	73.98	19.76	PK
10640	35.11	10.50	H	45.61	53.98	8.37	AV
15960	42.24	14.27	H	56.51	73.98	17.47	PK
15960	30.18	14.27	H	44.45	53.98	9.53	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 2
Operation Mode:	802.11 n_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5260 MHz
Channel No.	52 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10520	44.76	10.38	V	55.14	68.20	13.06	PK
15780	45.19	14.38	V	59.57	73.98	14.41	PK
15780	31.82	14.38	V	46.20	53.98	7.78	AV
10520	42.58	10.38	H	52.96	68.20	15.24	PK
15780	43.51	14.38	H	57.89	73.98	16.09	PK
15780	31.54	14.38	H	45.92	53.98	8.06	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_20 MHz BW. Worst case is 6.5 Mbps in 802.11n_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNF0855P



Band : UNII 2
 Operation Mode: 802.11 n_20 MHz BW
 Transfer Rate: 6.5 Mbps
 Operating Frequency 5300 MHz
 Channel No. 60 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10600	43.99	10.39	V	54.38	73.98	19.60	PK
10600	37.13	10.39	V	47.52	53.98	6.46	AV
15900	44.05	14.00	V	58.05	73.98	15.93	PK
15900	30.33	14.00	V	44.33	53.98	9.65	AV
10600	42.54	10.39	H	52.93	73.98	21.05	PK
10600	35.18	10.39	H	45.57	53.98	8.41	AV
15900	43.08	14.00	H	57.08	73.98	16.90	PK
15900	30.25	14.00	H	44.25	53.98	9.73	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_20 MHz BW. Worst case is 6.5 Mbps in 802.11n_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band : UNII 2
 Operation Mode: 802.11 n_20 MHz BW
 Transfer Rate: 6.5 Mbps
 Operating Frequency 5320 MHz
 Channel No. 64 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10640	44.20	10.50	V	54.70	73.98	19.28	PK
10640	37.32	10.50	V	47.82	53.98	6.16	AV
15960	44.62	14.27	V	58.89	73.98	15.09	PK
15960	30.94	14.27	V	45.21	53.98	8.77	AV
10640	42.81	10.50	H	53.31	73.98	20.67	PK
10640	35.28	10.50	H	45.78	53.98	8.20	AV
15960	43.05	14.27	H	57.32	73.98	16.66	PK
15960	30.71	14.27	H	44.98	53.98	9.00	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_20 MHz BW. Worst case is 6.5 Mbps in 802.11n_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 2
Operation Mode:	802.11 ac_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5260 MHz
Channel No.	52 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10520	44.02	10.38	V	54.40	68.20	13.80	PK
15780	45.71	14.38	V	60.09	73.98	13.89	PK
15780	31.89	14.38	V	46.27	53.98	7.71	AV
10520	43.15	10.38	H	53.53	68.20	14.67	PK
15780	43.08	14.38	H	57.46	73.98	16.52	PK
15780	30.81	14.38	H	45.19	53.98	8.79	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_20 MHz BW. Worst case is 6.5 Mbps in 802.11ac_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



Band :	UNII 2
Operation Mode:	802.11 ac_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5300 MHz
Channel No.	60 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10600	43.92	10.39	V	54.31	73.98	19.67	PK
10600	37.43	10.39	V	47.82	53.98	6.16	AV
15900	44.22	14.00	V	58.22	73.98	15.76	PK
15900	30.24	14.00	V	44.24	53.98	9.74	AV
10600	42.81	10.39	H	53.20	73.98	20.78	PK
10600	35.81	10.39	H	46.20	53.98	7.78	AV
15900	42.56	14.00	H	56.56	73.98	17.42	PK
15900	30.12	14.00	H	44.12	53.98	9.86	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_20 MHz BW. Worst case is 6.5 Mbps in 802.11ac_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 2
Operation Mode:	802.11 ac_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5320 MHz
Channel No.	64 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10640	44.61	10.50	V	55.11	73.98	18.87	PK
10640	37.57	10.50	V	48.07	53.98	5.91	AV
15960	43.40	14.27	V	57.67	73.98	16.31	PK
15960	30.05	14.27	V	44.32	53.98	9.66	AV
10640	41.05	10.50	H	51.55	73.98	22.43	PK
10640	35.24	10.50	H	45.74	53.98	8.24	AV
15960	42.25	14.27	H	56.52	73.98	17.46	PK
15960	30.01	14.27	H	44.28	53.98	9.70	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_20 MHz BW. Worst case is 6.5 Mbps in 802.11ac_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



Band :	UNII 2
Operation Mode:	802.11n_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5270 MHz
Channel No.	54 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10540	44.64	10.55	V	55.19	68.20	13.01	PK
15810	44.71	14.26	V	58.97	73.98	15.01	PK
15810	31.53	14.26	V	45.79	53.98	8.19	AV
10540	42.41	10.55	H	52.96	68.20	15.24	PK
15810	42.54	14.26	H	56.80	73.98	17.18	PK
15810	30.78	14.26	H	45.04	53.98	8.94	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_40 MHz BW. Worst case is 13.5 Mbps in 802.11n_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 2
Operation Mode:	802.11n_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5310 MHz
Channel No.	62 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10620	43.52	10.25	V	53.77	73.98	20.21	PK
10620	37.49	10.25	V	47.74	53.98	6.24	AV
15930	44.14	13.62	V	57.76	73.98	16.22	PK
15930	31.54	13.62	V	45.16	53.98	8.82	AV
10620	41.25	10.25	H	51.50	73.98	22.48	PK
10620	35.18	10.25	H	45.43	53.98	8.55	AV
15930	42.25	13.62	H	55.87	73.98	18.11	PK
15930	30.95	13.62	H	44.57	53.98	9.41	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_40 MHz BW. Worst case is 13.5 Mbps in 802.11n_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 2
Operation Mode:	802.11ac_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5270 MHz
Channel No.	54 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10540	44.51	10.55	V	55.06	68.20	13.14	PK
15810	44.59	14.26	V	58.85	73.98	15.13	PK
15810	31.42	14.26	V	45.68	53.98	8.30	AV
10540	42.18	10.55	H	52.73	68.20	15.47	PK
15810	42.58	14.26	H	56.84	73.98	17.14	PK
15810	30.85	14.26	H	45.11	53.98	8.87	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_40 MHz BW. Worst case is 13.5 Mbps in 802.11ac_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 2
Operation Mode:	802.11ac_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5310 MHz
Channel No.	62 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10620	43.45	10.25	V	53.70	73.98	20.28	PK
10620	37.32	10.25	V	47.57	53.98	6.41	AV
15930	44.25	13.62	V	57.87	73.98	16.11	PK
15930	31.28	13.62	V	44.90	53.98	9.08	AV
10620	41.58	10.25	H	51.83	73.98	22.15	PK
10620	35.95	10.25	H	46.20	53.98	7.78	AV
15930	42.15	13.62	H	55.77	73.98	18.21	PK
15930	30.58	13.62	H	44.20	53.98	9.78	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_40 MHz BW. Worst case is 13.5 Mbps in 802.11ac_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 2
Operation Mode:	802.11ac_80 MHz BW
Transfer Rate:	29.3 Mbps
Operating Frequency	5290 MHz
Channel No.	58 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
10580	43.82	10.42	V	54.24	68.20	13.96	PK
15870	44.12	13.96	V	58.08	73.98	15.90	PK
15870	30.41	13.96	V	44.37	53.98	9.61	AV
10580	41.29	10.42	H	51.71	68.20	16.49	PK
15870	42.09	13.96	H	56.05	73.98	17.93	PK
15870	30.18	13.96	H	44.14	53.98	9.84	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_80 MHz BW. Worst case is 13.5 Mbps in 802.11ac_80 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 2e
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5500 MHz
Channel No.	100 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11000	42.69	11.28	V	53.97	73.98	20.01	PK
11000	36.04	11.28	V	47.32	53.98	6.66	AV
16500	45.51	14.19	V	59.70	68.20	8.50	PK
11000	41.28	11.28	H	52.56	73.98	21.42	PK
11000	34.98	11.28	H	46.26	53.98	7.72	AV
16500	43.78	14.19	H	57.97	68.20	10.23	PK

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



Band :	UNII 2e
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5580 MHz
Channel No.	116 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11160	42.48	11.10	V	53.58	73.98	20.40	PK
11160	33.87	11.10	V	44.97	53.98	9.01	AV
16740	45.47	15.70	V	61.17	68.20	7.03	PK
11160	41.21	11.10	H	52.31	73.98	21.67	PK
11160	31.98	11.10	H	43.08	53.98	10.90	AV
16740	43.21	15.70	H	58.91	68.20	9.29	PK

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 2e
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5700 MHz
Channel No.	140 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11400	45.40	10.97	V	56.37	73.98	17.61	PK
11400	36.34	10.97	V	47.31	53.98	6.67	AV
17100	44.56	17.82	V	62.38	68.20	5.82	PK
11400	43.92	10.97	H	54.89	73.98	19.09	PK
11400	35.18	10.97	H	46.15	53.98	7.83	AV
17100	42.58	17.82	H	60.40	68.20	7.80	PK

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11a. Worst case is 6 Mbps in 802.11a.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF855P



Band :	UNII 2e
Operation Mode:	802.11 n_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5500 MHz
Channel No.	100 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11000	42.76	11.28	V	54.04	73.98	19.94	PK
11000	36.53	11.28	V	47.81	53.98	6.17	AV
16500	45.45	14.19	V	59.64	68.20	8.56	PK
11000	41.08	11.28	H	52.36	73.98	21.62	PK
11000	34.92	11.28	H	46.20	53.98	7.78	AV
16500	43.29	14.19	H	57.48	68.20	10.72	PK

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_20 MHz BW. Worst case is 6.5 Mbps in 802.11n_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



Band :	UNII 2e
Operation Mode:	802.11 n_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5580 MHz
Channel No.	116 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11160	41.73	11.10	V	52.83	73.98	21.15	PK
11160	33.88	11.10	V	44.98	53.98	9.00	AV
16740	44.73	15.70	V	60.43	68.20	7.77	PK
11160	40.58	11.10	H	51.68	73.98	22.30	PK
11160	31.29	11.10	H	42.39	53.98	11.59	AV
16740	42.85	15.70	H	58.55	68.20	9.65	PK

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_20 MHz BW. Worst case is 6.5 Mbps in 802.11n_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



Band :	UNII 2e
Operation Mode:	802.11 n_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5700 MHz
Channel No.	140 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11400	45.08	10.97	V	56.05	73.98	17.93	PK
11400	36.77	10.97	V	47.74	53.98	6.24	AV
17100	44.86	17.82	V	62.68	68.20	5.52	PK
11400	43.08	10.97	H	54.05	73.98	19.93	PK
11400	34.51	10.97	H	45.48	53.98	8.50	AV
17100	42.58	17.82	H	60.40	68.20	7.80	PK

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_20 MHz BW. Worst case is 6.5 Mbps in 802.11n_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P



Band :	UNII 2e
Operation Mode:	802.11 ac_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5500 MHz
Channel No.	100 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11000	42.71	11.28	V	53.99	73.98	19.99	PK
11000	36.58	11.28	V	47.86	53.98	6.12	AV
16500	45.18	14.19	V	59.37	68.20	8.83	PK
11000	41.08	11.28	H	52.36	73.98	21.62	PK
11000	34.15	11.28	H	45.43	53.98	8.55	AV
16500	43.08	14.19	H	57.27	68.20	10.93	PK

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_20 MHz BW. Worst case is 6.5 Mbps in 802.11ac_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



Band :	UNII 2e
Operation Mode:	802.11 ac_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5580 MHz
Channel No.	116 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11160	41.23	11.10	V	52.33	73.98	21.65	PK
11160	33.87	11.10	V	44.97	53.98	9.01	AV
16740	44.80	15.70	V	60.50	68.20	7.70	PK
11160	40.36	11.10	H	51.46	73.98	22.52	PK
11160	31.59	11.10	H	42.69	53.98	11.29	AV
16740	42.19	15.70	H	57.89	68.20	10.31	PK

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_20 MHz BW. Worst case is 6.5 Mbps in 802.11ac_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 2e
Operation Mode:	802.11 ac_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5720 MHz
Channel No.	140 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11440	43.71	10.97	V	54.68	73.98	19.30	PK
11440	36.94	10.97	V	47.91	53.98	6.07	AV
17160	45.42	17.82	V	63.24	68.20	4.96	PK
11440	41.36	10.97	H	52.33	73.98	21.65	PK
11440	33.84	10.97	H	44.81	53.98	9.17	AV
17160	42.95	17.82	H	60.77	68.20	7.43	PK

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_20 MHz BW. Worst case is 6.5 Mbps in 802.11ac_20 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. We applied the 15.407 for Ch.144 in 802.11ac according to KDB 644545 D01 v01r01.

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



Band :	UNII 2e
Operation Mode:	802.11n_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5510 MHz
Channel No.	102 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11020	41.67	11.28	V	52.95	73.98	21.03	PK
11020	35.68	11.28	V	46.96	53.98	7.02	AV
16530	43.28	14.83	V	58.11	68.20	10.09	PK
11020	40.22	11.28	H	51.50	73.98	22.48	PK
11020	33.85	11.28	H	45.13	53.98	8.85	AV
16530	41.95	14.83	H	56.78	68.20	11.42	PK

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_40 MHz BW. Worst case is 13.5 Mbps in 802.11n_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



Band :	UNII 2e
Operation Mode:	802.11n_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5590 MHz
Channel No.	118 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11180	42.43	11.12	V	53.55	73.98	20.43	PK
11180	34.78	11.12	V	45.90	53.98	8.08	AV
16770	44.12	16.52	V	60.64	68.20	7.56	PK
11180	41.02	11.12	H	52.14	73.98	21.84	PK
11180	32.54	11.12	H	43.66	53.98	10.32	AV
16770	42.23	16.52	H	58.75	68.20	9.45	PK

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_40 MHz BW. Worst case is 13.5 Mbps in 802.11n_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



Band :	UNII 2e
Operation Mode:	802.11n_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5670 MHz
Channel No.	134 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11340	42.15	10.86	V	53.01	73.98	20.97	PK
11340	33.84	10.86	V	44.70	53.98	9.28	AV
17010	43.98	18.15	V	62.13	68.20	6.07	PK
11340	40.29	10.86	H	51.15	73.98	22.83	PK
11340	31.94	10.86	H	42.80	53.98	11.18	AV
17010	41.58	18.15	H	59.73	68.20	8.47	PK

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11n_40 MHz BW. Worst case is 13.5 Mbps in 802.11n_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 2e
Operation Mode:	802.11ac_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5510 MHz
Channel No.	102 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11020	41.58	11.28	V	52.86	73.98	21.12	PK
11020	35.51	11.28	V	46.79	53.98	7.19	AV
16530	43.21	14.83	V	58.04	68.20	10.16	PK
11020	40.12	11.28	H	51.40	73.98	22.58	PK
11020	33.19	11.28	H	44.47	53.98	9.51	AV
16530	41.28	14.83	H	56.11	68.20	12.09	PK

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_40 MHz BW. Worst case is 13.5 Mbps in 802.11ac_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 2e
Operation Mode:	802.11ac_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5590 MHz
Channel No.	118 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11180	42.58	11.12	V	53.70	73.98	20.28	PK
11180	34.57	11.12	V	45.69	53.98	8.29	AV
16770	43.98	16.52	V	60.50	68.20	7.70	PK
11180	40.56	11.12	H	51.68	73.98	22.30	PK
11180	32.49	11.12	H	43.61	53.98	10.37	AV
16770	41.58	16.52	H	58.10	68.20	10.10	PK

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_40 MHz BW. Worst case is 13.5 Mbps in 802.11ac_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



Band :	UNII 2e
Operation Mode:	802.11ac_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5710 MHz
Channel No.	142 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11420	42.47	10.73	V	53.20	73.98	20.78	PK
11420	33.91	10.73	V	44.64	53.98	9.34	AV
17130	43.58	18.11	V	61.69	68.20	6.51	PK
11420	41.08	10.73	H	51.81	73.98	22.17	PK
11420	31.59	10.73	H	42.32	53.98	11.66	AV
17130	41.68	18.11	H	59.79	68.20	8.41	PK

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_40 MHz BW. Worst case is 13.5 Mbps in 802.11ac_40 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
7. We applied the 15.407 for Ch.142 in 802.11ac according to KDB 644545 D01 v01r01.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band :	UNII 2e
Operation Mode:	802.11ac_80 MHz BW
Transfer Rate:	29.3 Mbps
Operating Frequency	5530 MHz
Channel No.	106 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11060	42.26	11.48	V	53.74	73.98	20.24	PK
11060	33.54	11.48	V	45.02	53.98	8.96	AV
16590	44.98	14.42	V	59.40	68.20	8.80	PK
11060	40.16	11.48	H	51.64	73.98	22.34	PK
11060	31.24	11.48	H	42.72	53.98	11.26	AV
16590	42.09	14.42	H	56.51	68.20	11.69	PK

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_80 MHz BW. Worst case is 13.5 Mbps in 802.11ac_80 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



Band :	UNII 2e
Operation Mode:	802.11ac_80 MHz BW
Transfer Rate:	29.3 Mbps
Operating Frequency	5690 MHz
Channel No.	138 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp G. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
11380	45.12	11.05	V	56.17	73.98	17.81	PK
11380	36.13	11.05	V	47.18	53.98	6.80	AV
17070	44.38	18.08	V	62.46	68.20	5.74	PK
11380	43.08	11.05	H	54.13	73.98	19.85	PK
11380	33.85	11.05	H	44.90	53.98	9.08	AV
17070	42.18	18.08	H	60.26	68.20	7.94	PK

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done all data rate in 802.11ac_80 MHz BW. Worst case is 13.5 Mbps in 802.11ac_80 MHz BW.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna
7. We applied the 15.407 for Ch.138 in 802.11ac according to KDB 644545 D01 v01r01.

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P

8.7.2 RADIATED RESTRICTED BAND EDGE MEASUREMENTS

Test Requirements and limit, §15.247(d) §15.205, §15.209

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a) (See section 15.205(c)).

Stand alone

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	55.60	-0.51	H	55.09	73.98	18.89	PK
5150	43.96	-0.51	H	43.45	53.98	10.53	AV
5150	53.99	-0.51	V	53.48	73.98	20.50	PK
5150	42.61	-0.51	V	42.10	53.98	11.88	AV



Band : UNII 1
 Operation Mode: 802.11 n_20 MHz BW
 Transfer Rate: 6.5 Mbps
 Operating Frequency 5180 MHz
 Channel No. 36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	55.49	-0.51	H	54.98	73.98	19.00	PK
5150	44.08	-0.51	H	43.57	53.98	10.41	AV
5150	54.86	-0.51	V	54.35	73.98	19.63	PK
5150	43.27	-0.51	V	42.76	53.98	11.22	AV

Band : UNII 1
 Operation Mode: 802.11 ac_20 MHz BW
 Transfer Rate: 6.5 Mbps
 Operating Frequency 5180 MHz
 Channel No. 36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	56.11	-0.51	H	55.60	73.98	18.38	PK
5150	44.75	-0.51	H	44.24	53.98	9.74	AV
5150	55.62	-0.51	V	55.11	73.98	18.87	PK
5150	44.01	-0.51	V	43.50	53.98	10.48	AV



Band : UNII 1
 Operation Mode: 802.11n_40 MHz BW
 Transfer Rate: 13.5 Mbps
 Operating Frequency 5190 MHz
 Channel No. 38 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	56.23	-0.51	H	55.72	73.98	18.26	PK
5150	43.81	-0.51	H	43.30	53.98	10.68	AV
5150	55.39	-0.51	V	54.88	73.98	19.10	PK
5150	42.83	-0.51	V	42.32	53.98	11.66	AV

Band : UNII 1
 Operation Mode: 802.11 ac_40 MHz BW
 Transfer Rate: 13.5 Mbps
 Operating Frequency 5190 MHz
 Channel No. 38 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	55.69	-0.51	H	55.18	73.98	18.80	PK
5150	43.57	-0.51	H	43.06	53.98	10.92	AV
5150	54.98	-0.51	V	54.47	73.98	19.51	PK
5150	43.27	-0.51	V	42.76	53.98	11.22	AV



Band : UNII 1
 Operation Mode: 802.11 ac_80 MHz BW
 Transfer Rate: 29.3 Mbps
 Operating Frequency 5210 MHz
 Channel No. 42 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	57.90	-0.51	H	57.39	73.98	16.59	PK
5150	45.89	-0.51	H	45.38	53.98	8.60	AV
5150	57.56	-0.51	V	57.05	73.98	16.93	PK
5150	45.36	-0.51	V	44.85	53.98	9.13	AV

Notes:

1. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + ATT
2. We have done all data rate in 802.11a/n/ac mode test. . Worst case of EUT is lowest data rate in 802.11a/n/ac
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P



Band : UNII 2
 Operation Mode: 802.11 a
 Transfer Rate: 6 Mbps
 Operating Frequency 5320 MHz
 Channel No. 64 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	56.24	-0.19	H	56.05	73.98	17.93	PK
5350	43.06	-0.19	H	42.87	53.98	11.11	AV
5350	54.86	-0.19	V	54.67	73.98	19.31	PK
5350	42.13	-0.19	V	41.94	53.98	12.04	AV

Band : UNII 2
 Operation Mode: 802.11 n_20 MHz BW
 Transfer Rate: 6 Mbps
 Operating Frequency 5320 MHz
 Channel No. 64 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	54.88	-0.19	H	54.69	73.98	19.29	PK
5350	43.01	-0.19	H	42.82	53.98	11.16	AV
5350	54.63	-0.19	V	54.44	73.98	19.54	PK
5350	42.11	-0.19	V	41.92	53.98	12.06	AV



Band : UNII 2
 Operation Mode: 802.11 ac_20 MHz BW
 Transfer Rate: 6.5 Mbps
 Operating Frequency 5320 MHz
 Channel No. 64 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	55.44	-0.19	H	55.25	73.98	18.73	PK
5350	43.93	-0.19	H	43.74	53.98	10.24	AV
5350	54.34	-0.19	V	54.15	73.98	19.83	PK
5350	43.13	-0.19	V	42.94	53.98	11.04	AV

Band : UNII 2
 Operation Mode: 802.11n_40 MHz BW
 Transfer Rate: 13.5 Mbps
 Operating Frequency 5310 MHz
 Channel No. 62 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	61.79	-0.19	H	61.60	73.98	12.38	PK
5350	43.84	-0.19	H	43.65	53.98	10.33	AV
5350	56.83	-0.19	V	56.64	73.98	17.34	PK
5350	42.90	-0.19	V	42.71	53.98	11.27	AV



Band :	UNII 2
Operation Mode:	802.11 ac_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5310 MHz
Channel No.	62 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	56.46	-0.19	H	56.27	73.98	17.71	PK
5350	43.79	-0.19	H	43.60	53.98	10.38	AV
5350	56.13	-0.19	V	55.94	73.98	18.04	PK
5350	43.28	-0.19	V	43.09	53.98	10.89	AV

Band :	UNII 2
Operation Mode:	802.11 ac_80 MHz BW
Transfer Rate:	29.3 Mbps
Operating Frequency	5290 MHz
Channel No.	58 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	58.52	-0.19	H	58.33	73.98	15.65	PK
5350	46.41	-0.19	H	46.22	53.98	7.76	AV
5350	58.33	-0.19	V	58.14	73.98	15.84	PK
5350	46.34	-0.19	V	46.15	53.98	7.83	AV

Notes:

1. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + ATT
2. We have done all data rate in 802.11a/n/ac mode test. . Worst case of EUT is lowest data rate in 802.11a/n/ac
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.



Band : UNII 2e
 Operation Mode: 802.11 a
 Transfer Rate: 6 Mbps
 Operating Frequency 5500 MHz
 Channel No. 100 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	56.40	0.38	H	56.78	73.98	17.20	PK
5460	43.82	0.38	H	44.20	53.98	9.78	AV
*5470	58.46	0.24	H	58.70	68.20	9.50	PK
5460	54.97	0.38	V	55.35	73.98	18.63	PK
5460	42.27	0.38	V	42.65	53.98	11.33	AV
*5470	55.48	0.24	V	55.72	68.20	12.48	PK

Band : UNII 2e
 Operation Mode: 802.11 a
 Transfer Rate: 6 Mbps
 Operating Frequency 5700 MHz
 Channel No. 140 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
*5725	61.17	1.05	H	62.22	68.20	5.99	PK
*5725	59.49	1.05	V	60.54	68.20	7.67	PK



Band : UNII 2e
 Operation Mode: 802.11 n_20 MHz BW
 Transfer Rate: 6 Mbps
 Operating Frequency 5500 MHz
 Channel No. 100 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	55.96	0.38	H	56.34	73.98	17.64	PK
5460	44.31	0.38	H	44.69	53.98	9.29	AV
*5470	57.48	0.24	H	57.72	68.20	10.48	PK
5460	55.04	0.38	V	55.42	73.98	18.56	PK
5460	42.34	0.38	V	42.72	53.98	11.26	AV
*5470	55.89	0.24	V	56.13	68.20	12.07	PK

Band : UNII 2e
 Operation Mode: 802.11 n_20 MHz BW
 Transfer Rate: 6.5 Mbps
 Operating Frequency 5700 MHz
 Channel No. 140 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
*5725	61.33	1.05	H	62.38	68.20	5.83	PK
*5725	60.67	1.05	V	61.72	68.20	6.49	PK



Band : UNII 2e
 Operation Mode: 802.11 ac_20 MHz BW
 Transfer Rate: 6.5 Mbps
 Operating Frequency 5500 MHz
 Channel No. 100 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	56.22	0.38	H	56.60	73.98	17.38	PK
5460	43.56	0.38	H	43.94	53.98	10.04	AV
*5470	56.50	0.24	H	56.74	68.20	11.46	PK
5460	55.61	0.38	V	55.99	73.98	17.99	PK
5460	42.99	0.38	V	43.37	53.98	10.61	AV
*5470	55.96	0.24	V	56.20	68.20	12.00	PK

Band : UNII 2e
 Operation Mode: 802.11n_40 MHz BW
 Transfer Rate: 13.5 Mbps
 Operating Frequency 5510 MHz
 Channel No. 102 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	54.88	0.38	H	55.26	73.98	18.72	PK
5460	42.43	0.38	H	42.81	53.98	11.17	AV
*5470	64.86	0.24	H	65.10	68.20	3.10	PK
5460	55.33	0.38	V	55.71	73.98	18.27	PK
5460	42.18	0.38	V	42.56	53.98	11.42	AV
*5470	64.49	0.24	V	64.73	68.20	3.47	PK



Band : UNII 2e
 Operation Mode: 802.11 n_40 MHz BW
 Transfer Rate: 13.5 Mbps
 Operating Frequency 5670 MHz
 Channel No. 134 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
*5725	55.35	1.05	H	56.40	68.20	11.81	PK
*5725	55.03	1.05	V	56.08	68.20	12.13	PK

Band : UNII 2e
 Operation Mode: 802.11 ac_40 MHz BW
 Transfer Rate: 13.5 Mbps
 Operating Frequency 5510 MHz
 Channel No. 102 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	54.93	0.38	H	55.31	73.98	18.67	PK
5460	42.27	0.38	H	42.65	53.98	11.33	AV
*5470	58.15	0.24	H	58.39	68.20	9.81	PK
5460	54.81	0.38	V	55.19	73.98	18.79	PK
5460	42.22	0.38	V	42.60	53.98	11.38	AV
*5470	57.45	0.24	V	57.69	68.20	10.51	PK

Band :	UNII 2e
Operation Mode:	802.11 ac_80 MHz BW
Transfer Rate:	29.3 Mbps
Operating Frequency	5530 MHz
Channel No.	106 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	57.86	0.38	H	58.24	73.98	15.74	PK
5460	44.53	0.38	H	44.91	53.98	9.07	AV
*5470	61.15	0.24	H	61.39	68.20	6.81	PK
5460	57.47	0.38	V	57.85	73.98	16.13	PK
5460	43.60	0.38	V	43.98	53.98	10.00	AV
*5470	60.31	0.24	V	60.55	68.20	7.65	PK

Notes:

1. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + ATT
2. We have done all data rate in 802.11a/n/ac mode test. . Worst case of EUT is lowest data rate in 802.11a/n/ac
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. “*” is radiated band edge test frequency(not restricted band emissions).



With wireless charge pad

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	56.02	-0.51	H	55.51	73.98	18.47	PK
5150	42.22	-0.51	H	41.71	53.98	12.27	AV
5150	56.39	-0.51	V	55.88	73.98	18.10	PK
5150	42.28	-0.51	V	41.77	53.98	12.21	AV

Band :	UNII 1
Operation Mode:	802.11 n_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	55.86	-0.51	H	55.35	73.98	18.63	PK
5150	42.29	-0.51	H	41.78	53.98	12.20	AV
5150	56.26	-0.51	V	55.75	73.98	18.23	PK
5150	42.35	-0.51	V	41.84	53.98	12.14	AV



Band : UNII 1
 Operation Mode: 802.11 ac_20 MHz BW
 Transfer Rate: 6.5 Mbps
 Operating Frequency 5180 MHz
 Channel No. 36 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	55.80	-0.51	H	55.29	73.98	18.69	PK
5150	42.81	-0.51	H	42.30	53.98	11.68	AV
5150	56.04	-0.51	V	55.53	73.98	18.45	PK
5150	42.95	-0.51	V	42.44	53.98	11.54	AV

Band : UNII 1
 Operation Mode: 802.11n_40 MHz BW
 Transfer Rate: 13.5 Mbps
 Operating Frequency 5190 MHz
 Channel No. 38 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	55.77	-0.51	H	55.26	73.98	18.72	PK
5150	43.52	-0.51	H	43.01	53.98	10.97	AV
5150	56.55	-0.51	V	56.04	73.98	17.94	PK
5150	43.67	-0.51	V	43.16	53.98	10.82	AV



Band : UNII 1
 Operation Mode: 802.11 ac_40 MHz BW
 Transfer Rate: 13.5 Mbps
 Operating Frequency 5190 MHz
 Channel No. 38 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	56.24	-0.51	H	55.73	73.98	18.25	PK
5150	43.11	-0.51	H	42.60	53.98	11.38	AV
5150	56.71	-0.51	V	56.20	73.98	17.78	PK
5150	43.24	-0.51	V	42.73	53.98	11.25	AV

Band : UNII 1
 Operation Mode: 802.11 ac_80 MHz BW
 Transfer Rate: 29.3 Mbps
 Operating Frequency 5210 MHz
 Channel No. 42 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5150	55.46	-0.51	H	54.95	73.98	19.03	PK
5150	44.44	-0.51	H	43.93	53.98	10.05	AV
5150	56.03	-0.51	V	55.52	73.98	18.46	PK
5150	44.53	-0.51	V	44.02	53.98	9.96	AV

Notes:

1. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + ATT
2. We have done all data rate in 802.11a/n/ac mode test. . Worst case of EUT is lowest data rate in 802.11a/n/ac
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.



Band : UNII 2
 Operation Mode: 802.11 a
 Transfer Rate: 6 Mbps
 Operating Frequency 5320 MHz
 Channel No. 64 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	55.38	-0.19	H	55.19	73.98	18.79	PK
5350	41.80	-0.19	H	41.61	53.98	12.37	AV
5350	54.54	-0.19	V	54.35	73.98	19.63	PK
5350	41.53	-0.19	V	41.34	53.98	12.64	AV

Band : UNII 2
 Operation Mode: 802.11 n_20 MHz BW
 Transfer Rate: 6 Mbps
 Operating Frequency 5320 MHz
 Channel No. 64 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	55.02	-0.19	H	54.83	73.98	19.15	PK
5350	41.75	-0.19	H	41.56	53.98	12.42	AV
5350	54.35	-0.19	V	54.16	73.98	19.82	PK
5350	41.39	-0.19	V	41.20	53.98	12.78	AV



Band : UNII 2
 Operation Mode: 802.11 ac_20 MHz BW
 Transfer Rate: 6.5 Mbps
 Operating Frequency 5320 MHz
 Channel No. 64 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	54.92	-0.19	H	54.73	73.98	19.25	PK
5350	41.76	-0.19	H	41.57	53.98	12.41	AV
5350	54.74	-0.19	V	54.55	73.98	19.43	PK
5350	41.66	-0.19	V	41.47	53.98	12.51	AV

Band : UNII 2
 Operation Mode: 802.11n_40 MHz BW
 Transfer Rate: 13.5 Mbps
 Operating Frequency 5310 MHz
 Channel No. 62 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	54.89	-0.19	H	54.70	73.98	19.28	PK
5350	42.08	-0.19	H	41.89	53.98	12.09	AV
5350	54.31	-0.19	V	54.12	73.98	19.86	PK
5350	41.91	-0.19	V	41.72	53.98	12.26	AV



Band :	UNII 2
Operation Mode:	802.11 ac_40 MHz BW
Transfer Rate:	13.5 Mbps
Operating Frequency	5310 MHz
Channel No.	62 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	54.54	-0.19	H	54.35	73.98	19.63	PK
5350	42.06	-0.19	H	41.87	53.98	12.11	AV
5350	54.44	-0.19	V	54.25	73.98	19.73	PK
5350	41.97	-0.19	V	41.78	53.98	12.20	AV

Band :	UNII 2
Operation Mode:	802.11 ac_80 MHz BW
Transfer Rate:	29.3 Mbps
Operating Frequency	5290 MHz
Channel No.	58 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5350	54.51	-0.19	H	54.32	73.98	19.66	PK
5350	43.53	-0.19	H	43.34	53.98	10.64	AV
5350	54.04	-0.19	V	53.85	73.98	20.13	PK
5350	43.21	-0.19	V	43.02	53.98	10.96	AV

Notes:

1. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + ATT
2. We have done all data rate in 802.11a/n/ac mode test. . Worst case of EUT is lowest data rate in 802.11a/n/ac
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.



Band : UNII 2e
 Operation Mode: 802.11 a
 Transfer Rate: 6 Mbps
 Operating Frequency 5500 MHz
 Channel No. 100 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	54.39	0.38	H	54.77	73.98	19.21	PK
5460	41.66	0.38	H	42.04	53.98	11.94	AV
*5470	55.10	0.24	H	55.34	68.20	12.86	PK
5460	54.80	0.38	V	55.18	73.98	18.80	PK
5460	41.72	0.38	V	42.10	53.98	11.88	AV
*5470	55.32	0.24	V	55.56	68.20	12.64	PK

Band : UNII 2e
 Operation Mode: 802.11 a
 Transfer Rate: 6 Mbps
 Operating Frequency 5700 MHz
 Channel No. 140 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
*5725	56.81	1.05	H	57.86	68.20	10.35	PK
*5725	56.11	1.05	V	57.16	68.20	11.05	PK



Band : UNII 2e
 Operation Mode: 802.11 n_20 MHz BW
 Transfer Rate: 6 Mbps
 Operating Frequency 5500 MHz
 Channel No. 100 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	53.92	0.38	H	54.30	73.98	19.68	PK
5460	41.34	0.38	H	41.72	53.98	12.26	AV
*5470	54.51	0.24	H	54.75	68.20	13.45	PK
5460	54.89	0.38	V	55.27	73.98	18.71	PK
5460	41.47	0.38	V	41.85	53.98	12.13	AV
*5470	55.05	0.24	V	55.29	68.20	12.91	PK

Band : UNII 2e
 Operation Mode: 802.11 n_20 MHz BW
 Transfer Rate: 6.5 Mbps
 Operating Frequency 5700 MHz
 Channel No. 140 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
*5725	57.99	1.05	H	59.04	68.20	9.17	PK
*5725	58.37	1.05	V	59.42	68.20	8.79	PK



Band : UNII 2e
 Operation Mode: 802.11 ac_20 MHz BW
 Transfer Rate: 6.5 Mbps
 Operating Frequency 5500 MHz
 Channel No. 100 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	53.99	0.38	H	54.37	73.98	19.61	PK
5460	41.43	0.38	H	41.81	53.98	12.17	AV
*5470	54.82	0.24	H	55.06	68.20	13.14	PK
5460	54.64	0.38	V	55.02	73.98	18.96	PK
5460	41.50	0.38	V	41.88	53.98	12.10	AV
*5470	55.40	0.24	V	55.64	68.20	12.56	PK

Band : UNII 2e
 Operation Mode: 802.11n_40 MHz BW
 Transfer Rate: 13.5 Mbps
 Operating Frequency 5510 MHz
 Channel No. 102 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	54.00	0.38	H	54.38	73.98	19.60	PK
5460	41.49	0.38	H	41.87	53.98	12.11	AV
*5470	59.61	0.24	H	59.85	68.20	8.35	PK
5460	54.73	0.38	V	55.11	73.98	18.87	PK
5460	41.95	0.38	V	42.33	53.98	11.65	AV
*5470	61.07	0.24	V	61.31	68.20	6.89	PK



Band : UNII 2e
 Operation Mode: 802.11 n_40 MHz BW
 Transfer Rate: 13.5 Mbps
 Operating Frequency 5670 MHz
 Channel No. 134 Ch

Frequency [MHz]	Reading DBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
*5725	55.24	1.05	H	56.29	68.20	11.92	PK
*5725	54.97	1.05	V	56.02	68.20	12.19	PK

Band : UNII 2e
 Operation Mode: 802.11 ac_40 MHz BW
 Transfer Rate: 13.5 Mbps
 Operating Frequency 5510 MHz
 Channel No. 102 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	54.52	0.38	H	54.90	73.98	19.08	PK
5460	41.86	0.38	H	42.24	53.98	11.74	AV
*5470	54.52	0.24	H	54.76	68.20	13.44	PK
5460	54.95	0.38	V	55.33	73.98	18.65	PK
5460	42.02	0.38	V	42.40	53.98	11.58	AV
*5470	55.30	0.24	V	55.54	68.20	12.66	PK



Band : UNII 2e
 Operation Mode: 802.11 ac_80 MHz BW
 Transfer Rate: 29.3 Mbps
 Operating Frequency 5530 MHz
 Channel No. 106 Ch

Frequency [MHz]	Reading dBuV	AN.+CL+AMP+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
5460	54.24	0.38	H	54.62	73.98	19.36	PK
5460	42.71	0.38	H	43.09	53.98	10.89	AV
*5470	56.89	0.24	H	57.13	68.20	11.07	PK
5460	54.67	0.38	V	55.05	73.98	18.93	PK
5460	42.94	0.38	V	43.32	53.98	10.66	AV
*5470	57.93	0.24	V	58.17	68.20	10.03	PK

Notes:

1. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + ATT
2. We have done all data rate in 802.11a/n/ac mode test. . Worst case of EUT is lowest data rate in 802.11a/n/ac
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. “*” is radiated band edge test frequency(not restricted band emissions).

8.8 POWERLINE CONDUCTED EMISSIONS

Test Requirements and limit, §15.207

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dBµV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference groundplane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.
5. We are performed the AC Power Line Conducted Emission test for 18 Mbps, Ch.52 and 802.11a_HT20 mode in UNII 2. Because 802.11a_HT20 mode in UNII 2 is worst case.



Stand alone

RESULT PLOTS

Conducted Emissions (Line 1)

EMI Auto Test(2)


1 / 2

HCT TEST Report

Common Information

EUT: LG-D855P
 Manufacturer: LG
 Test Site: SHIELD ROOM
 Operating Conditions: WLAN MODE (5G)
 Operator Name: KS KANG

FCC CLASS B

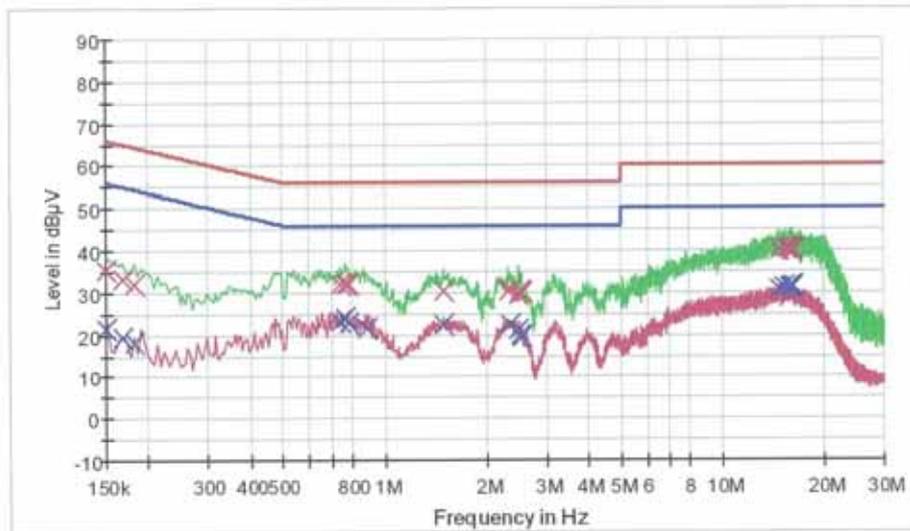

— FCC CLASS B_QP
 — FCC CLASS B_AV
 — Preview Result 1-FK
— Preview Result 2-AVG
 X Final Result 1-QPK
 X Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	35.5	9.000	Off	L1	9.7	30.5	66.0
0.168000	33.1	9.000	Off	L1	9.7	32.0	65.1
0.181500	32.1	9.000	Off	L1	9.7	32.3	64.4
0.743000	32.0	9.000	Off	L1	9.7	24.0	56.0
0.770000	32.2	9.000	Off	L1	9.7	23.8	56.0
0.779000	31.8	9.000	Off	L1	9.7	24.2	56.0
1.485500	30.3	9.000	Off	L1	9.8	25.7	56.0
2.327000	30.4	9.000	Off	L1	9.9	25.6	56.0
2.336000	30.9	9.000	Off	L1	9.9	25.1	56.0
2.498000	29.5	9.000	Off	L1	9.9	26.5	56.0
2.525000	30.3	9.000	Off	L1	9.9	25.7	56.0
2.543000	29.9	9.000	Off	L1	9.9	26.1	56.0
14.765000	39.8	9.000	Off	L1	10.6	20.2	60.0
15.395000	40.4	9.000	Off	L1	10.7	19.6	60.0
15.813500	40.3	9.000	Off	L1	10.7	19.7	60.0
15.827000	40.1	9.000	Off	L1	10.7	19.9	60.0

5/19/2014

9:08:44

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
16.065500	39.6	9.000	Off	L1	10.7	20.4	60.0
16.110500	40.3	9.000	Off	L1	10.7	19.7	60.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	21.6	9.000	Off	L1	9.7	34.4	56.0
0.168000	19.2	9.000	Off	L1	9.7	35.9	55.1
0.181500	18.2	9.000	Off	L1	9.7	36.2	54.4
0.743000	23.4	9.000	Off	L1	9.7	22.6	46.0
0.770000	24.1	9.000	Off	L1	9.7	21.9	46.0
0.779000	22.6	9.000	Off	L1	9.7	23.4	46.0
0.887000	21.6	9.000	Off	L1	9.7	24.4	46.0
1.485500	22.4	9.000	Off	L1	9.8	23.6	46.0
2.358500	22.5	9.000	Off	L1	9.9	23.5	46.0
2.498000	21.1	9.000	Off	L1	9.9	24.9	46.0
2.525000	20.0	9.000	Off	L1	9.9	26.0	46.0
2.543000	19.4	9.000	Off	L1	9.9	26.6	46.0
14.765000	30.8	9.000	Off	L1	10.6	19.2	50.0
15.165500	31.3	9.000	Off	L1	10.7	18.7	50.0
15.813500	31.2	9.000	Off	L1	10.7	18.8	50.0
15.827000	31.3	9.000	Off	L1	10.7	18.7	50.0
16.065500	31.4	9.000	Off	L1	10.7	18.6	50.0
16.110500	31.2	9.000	Off	L1	10.7	18.8	50.0

Conducted Emissions (Line 2)

EMI Auto Test(2)


1 / 2

HCT TEST Report

Common Information

EUT: LG-D855P
 Manufacturer: LG
 Test Site: SHIELD ROOM
 Operating Conditions: WLAN MODE (5G)
 Operator Name: KS KANG

FCC CLASS B

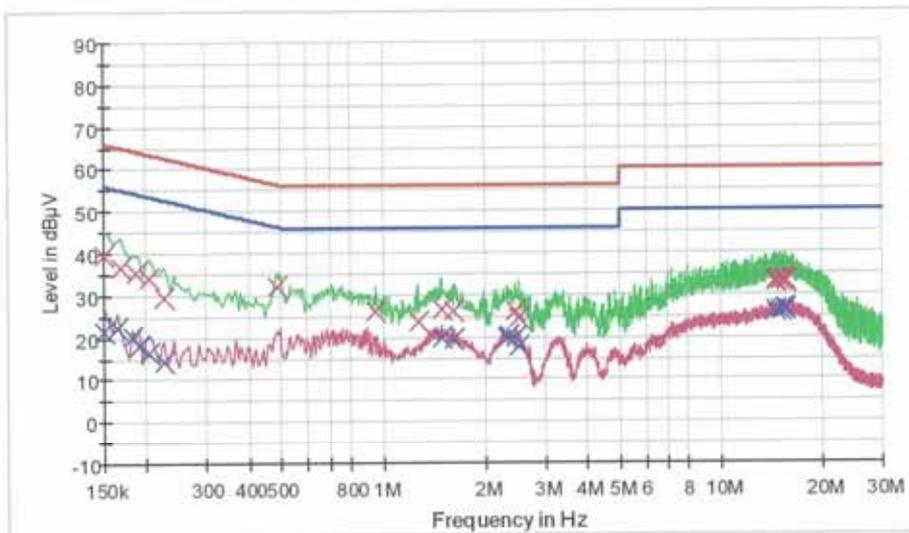

— FCCCLASS B_OP — FCCCLASS B_AV — Preview Result 1-PK
— Preview Result 2-AVG x Final Result 1-QPK x Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	39.5	9.000	Off	N	9.7	26.5	66.0
0.168000	36.8	9.000	Off	N	9.7	28.3	65.1
0.186000	35.2	9.000	Off	N	9.7	29.0	64.2
0.204000	34.3	9.000	Off	N	9.7	29.1	63.4
0.226500	29.5	9.000	Off	N	9.7	33.1	62.6
0.487500	31.9	9.000	Off	N	9.7	24.3	56.2
0.954500	26.2	9.000	Off	N	9.8	29.8	56.0
1.269500	23.7	9.000	Off	N	9.8	32.3	56.0
1.485500	26.6	9.000	Off	N	9.8	29.4	56.0
1.625000	26.1	9.000	Off	N	9.8	29.9	56.0
2.462000	26.1	9.000	Off	N	9.9	29.9	56.0
2.520500	24.6	9.000	Off	N	9.9	31.4	56.0
14.468000	33.2	9.000	Off	N	10.6	26.8	60.0
14.513000	32.7	9.000	Off	N	10.6	27.3	60.0
15.071000	33.2	9.000	Off	N	10.6	26.8	60.0
15.390500	33.6	9.000	Off	N	10.6	26.4	60.0

5/19/2014

9:00:30

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNF855P

EMI Auto Test(2)

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
15.602000	33.3	9.000	Off	N	10.6	26.7	60.0
15.624500	32.9	9.000	Off	N	10.6	27.1	60.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.150000	21.5	9.000	Off	N	9.7	34.5	56.0
0.163500	22.3	9.000	Off	N	9.7	33.0	55.3
0.181500	20.5	9.000	Off	N	9.7	33.9	54.4
0.190500	18.4	9.000	Off	N	9.7	35.6	54.0
0.204000	16.5	9.000	Off	N	9.7	36.9	53.4
0.226500	14.5	9.000	Off	N	9.7	38.1	52.6
1.485500	19.7	9.000	Off	N	9.8	26.3	46.0
1.625000	19.4	9.000	Off	N	9.8	26.6	46.0
2.318000	19.9	9.000	Off	N	9.9	26.1	46.0
2.336000	20.1	9.000	Off	N	9.9	25.9	46.0
2.462000	19.8	9.000	Off	N	9.9	26.2	46.0
2.520500	17.9	9.000	Off	N	9.9	28.1	46.0
14.468000	26.2	9.000	Off	N	10.6	23.8	50.0
14.513000	26.1	9.000	Off	N	10.6	23.9	50.0
15.071000	26.1	9.000	Off	N	10.6	23.9	50.0
15.390500	26.7	9.000	Off	N	10.6	23.3	50.0
15.602000	26.7	9.000	Off	N	10.6	23.3	50.0
15.624500	26.7	9.000	Off	N	10.6	23.3	50.0



With wireless charge pad

RESULT PLOTS

Conducted Emissions (Line 1)

EMI Auto Test(2)


1 / 2

HCT TEST Report

Common Information

EUT: LG-DB55P
 Manufacturer: LG (Wireless Charger)
 Test Site: SHIELD ROOM
 Operating Conditions: WLAN MODE (5G)
 Operator Name: KS KANG

FCC CLASS B

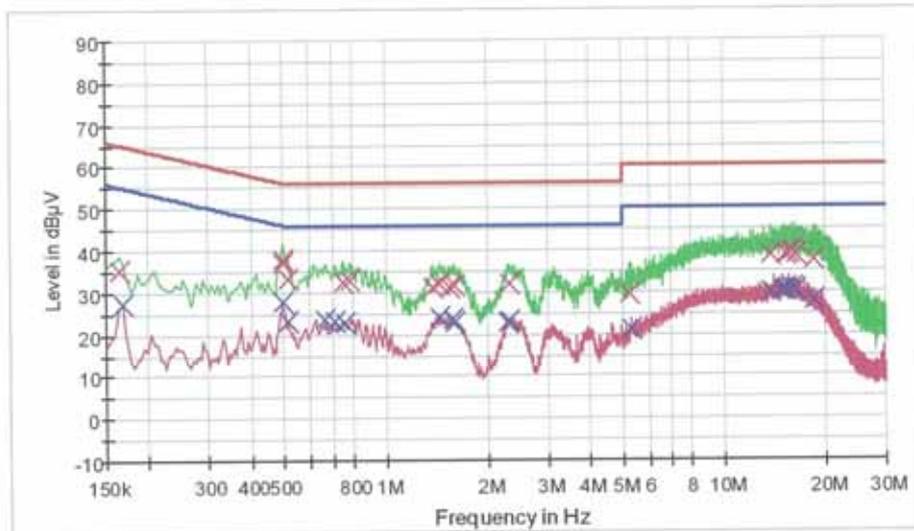

— FCCCLASS E_QP — FCCCLASS E_AV — Preview Result 1-PK
— Preview Result 2-AVG x Final Result 1-QPK x Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.163500	35.6	9.000	Off	L1	9.7	29.7	65.3
0.496500	38.0	9.000	Off	L1	9.7	18.1	56.1
0.500000	37.2	9.000	Off	L1	9.7	18.8	56.0
0.518000	33.2	9.000	Off	L1	9.7	22.8	56.0
0.747500	32.3	9.000	Off	L1	9.7	23.7	56.0
0.783500	32.8	9.000	Off	L1	9.7	23.2	56.0
1.373000	31.2	9.000	Off	L1	9.8	24.8	56.0
1.449500	32.0	9.000	Off	L1	9.8	24.0	56.0
1.539500	31.1	9.000	Off	L1	9.8	24.9	56.0
1.602500	31.6	9.000	Off	L1	9.8	24.4	56.0
2.318000	32.0	9.000	Off	L1	9.9	24.0	56.0
5.256500	29.4	9.000	Off	L1	10.1	30.6	60.0
13.680500	38.7	9.000	Off	L1	10.6	21.3	60.0
15.125000	38.9	9.000	Off	L1	10.7	21.1	60.0
15.624500	39.4	9.000	Off	L1	10.7	20.6	60.0
15.917000	39.4	9.000	Off	L1	10.7	20.6	60.0

5/19/2014

10:40:55

FCC PT.15.407 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC		FCC ID: ZNFD855P

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
16.254500	38.9	9.000	Off	L1	10.7	21.1	60.0
18.428000	37.6	9.000	Off	L1	10.8	22.4	60.0

Final Result 2


Frequency (MHz)	CAverage (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.168000	27.5	9.000	Off	L1	9.7	27.6	55.1
0.496500	27.8	9.000	Off	L1	9.7	18.3	46.1
0.513500	23.1	9.000	Off	L1	9.7	22.9	46.0
0.662000	23.6	9.000	Off	L1	9.7	22.4	46.0
0.707000	23.0	9.000	Off	L1	9.7	23.0	46.0
0.761000	22.8	9.000	Off	L1	9.7	23.2	46.0
1.445000	24.1	9.000	Off	L1	9.8	22.0	46.0
1.575500	23.4	9.000	Off	L1	9.8	22.6	46.0
1.602500	23.0	9.000	Off	L1	9.8	23.0	46.0
2.309000	22.8	9.000	Off	L1	9.9	23.2	46.0
2.322500	23.1	9.000	Off	L1	9.9	22.9	46.0
5.297000	21.1	9.000	Off	L1	10.1	28.9	50.0
13.680500	29.9	9.000	Off	L1	10.6	20.1	50.0
14.922500	30.3	9.000	Off	L1	10.6	19.7	50.0
15.125000	30.5	9.000	Off	L1	10.7	19.5	50.0
15.917000	30.6	9.000	Off	L1	10.7	19.4	50.0
16.250000	30.2	9.000	Off	L1	10.7	19.8	50.0
18.428000	27.9	9.000	Off	L1	10.8	22.1	50.0

HCT TEST Report

Common Information

EUT: LG-D855P
 Manufacturer: LG (Wireless Charger)
 Test Site: SHIELD ROOM
 Operating Conditions: WLAN MODE (5G)
 Operator Name: KS KANG

FCC CLASS B

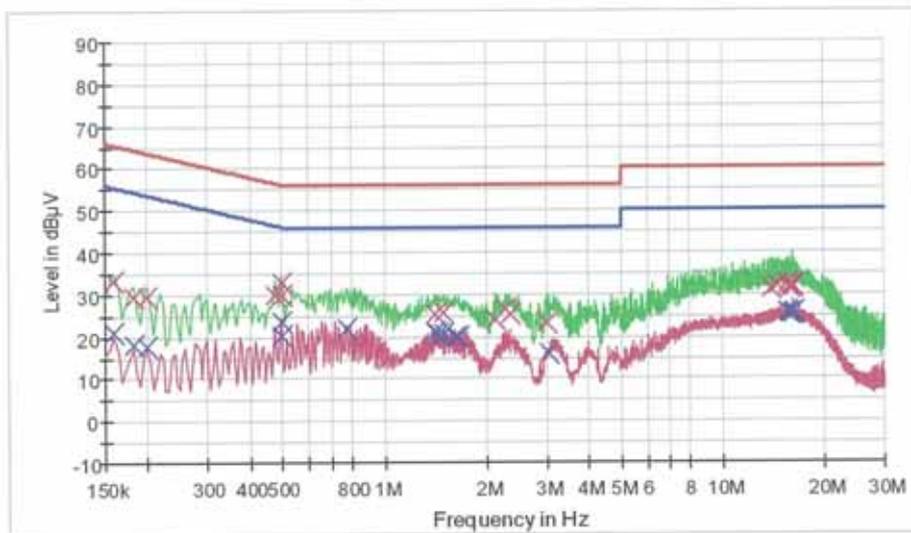

— FCCCLASS B_QP
 — FCCCLASS B_AV
 — Preview Result 1-PK
— Preview Result 2-AVG
 x Final Result 1-QPK
 x Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.159000	33.3	9.000	Off	N	9.7	32.2	65.5
0.181500	29.5	9.000	Off	N	9.7	34.9	64.4
0.199500	29.4	9.000	Off	N	9.7	34.2	63.6
0.478500	30.0	9.000	Off	N	9.7	26.4	56.4
0.496500	32.7	9.000	Off	N	9.7	23.4	56.1
0.500000	30.1	9.000	Off	N	9.7	25.9	56.0
1.404500	25.4	9.000	Off	N	9.8	30.6	56.0
1.485500	25.5	9.000	Off	N	9.8	30.5	56.0
2.124500	24.2	9.000	Off	N	9.9	31.8	56.0
2.282000	26.5	9.000	Off	N	9.9	29.5	56.0
2.336000	25.2	9.000	Off	N	9.9	30.8	56.0
3.015500	23.4	9.000	Off	N	10.0	32.6	56.0
13.838000	31.3	9.000	Off	N	10.5	28.7	60.0
14.463500	31.9	9.000	Off	N	10.6	28.1	60.0
15.521000	32.5	9.000	Off	N	10.6	27.5	60.0
15.813500	31.8	9.000	Off	N	10.6	28.2	60.0

5/19/2014

9:23:39

FCC PT.15.407 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F019-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
16.083500	31.7	9.000	Off	N	10.6	28.3	60.0
16.142000	32.1	9.000	Off	N	10.6	27.9	60.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.159000	21.3	9.000	Off	N	9.7	34.2	55.5
0.181500	18.1	9.000	Off	N	9.7	36.3	54.4
0.199500	17.6	9.000	Off	N	9.7	36.0	53.6
0.496500	23.8	9.000	Off	N	9.7	22.3	46.1
0.500000	20.5	9.000	Off	N	9.7	25.6	46.0
0.774500	22.0	9.000	Off	N	9.7	24.0	46.0
1.404500	21.1	9.000	Off	N	9.8	24.9	46.0
1.445000	20.6	9.000	Off	N	9.8	25.4	46.0
1.485500	20.7	9.000	Off	N	9.8	25.3	46.0
1.620500	19.9	9.000	Off	N	9.8	26.1	46.0
1.661000	19.9	9.000	Off	N	9.8	26.1	46.0
3.038000	16.2	9.000	Off	N	10.0	29.8	46.0
15.521000	25.7	9.000	Off	N	10.6	24.3	50.0
15.764000	25.4	9.000	Off	N	10.6	24.6	50.0
15.813500	25.4	9.000	Off	N	10.6	24.6	50.0
16.083500	25.5	9.000	Off	N	10.6	24.5	50.0
16.142000	25.4	9.000	Off	N	10.6	24.6	50.0
16.209500	25.7	9.000	Off	N	10.6	24.3	50.0

9. LIST OF TEST EQUIPMENT

9.1 LIST OF TEST EQUIPMENT(Conducted Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Calibration Due	Serial No.
Rohde & Schwarz	ENV216/ LISN	01/29/2014	Annual	01/29/2015	100073
Agilent	E4440A/ Spectrum Analyzer	04/09/2014	Annual	04/09/2015	US45303008
Agilent	N9020A/ SIGNAL ANALYZER	05/23/2014	Annual	05/23/2015	MY51110063
Agilent	N1911A/Power Meter	01/24/2014	Annual	01/24/2015	MY45100523
Agilent	N1921A /POWER SENSOR	07/11/2013	Annual	07/11/2014	MY45241059
Hewlett Packard	11636B/Power Divider	10/22/2013	Annual	10/22/2014	11377
Agilent	87300B/Directional Coupler	12/18/2013	Annual	12/18/2014	3116A03621
Hewlett Packard	11667B / Power Splitter	05/29/2013	Annual	05/29/2014	05001
DIGITAL	EP-3010 /DC POWER SUPPLY	10/29/2013	Annual	10/29/2014	3110117
ITECH	IT6720 / DC POWER SUPPLY	11/05/2013	Annual	11/05/2014	010002156287001199
TESCOM	TC-3000C / BLUETOOTH TESTER	04/24/2014	Annual	04/24/2015	3000C000276
Rohde & Schwarz	CBT / BLUETOOTH TESTER	05/07/2014	Annual	05/07/2015	100422
Agilent	8493C / Attenuator(10 dB)	07/24/2013	Annual	07/24/2014	76649
WEINSCHL	2-3 / Attenuator(3 dB)	10/28/2013	Annual	10/28/2014	BR0617
NAENG YEOL CO.LTD	NY-THR18750/ Temp & Humidity Chamber	10/30/2013	Annual	10/30/2014	NY-200912201A

Note: This equipment (E4440A/ Spectrum Analyzer) is used after 04/09/2014 and actual calibration date is 04/09/2014

This equipment (TC-3000C / BLUETOOTH TESTER) is used after 04/24/2014 and actual calibration date is 04/24/2014

This equipment (CBT / BLUETOOTH TESTER) is used after 05/07/2014 and actual calibration date is 05/07/2014

9.2 LIST OF TEST EQUIPMENT(Radiated Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Calibration Due	Serial No.
Schwarzbeck	VULB 9160/ TRILOG Antenna	12/17/2012	Biennial	12/17/2014	3150
Rohde & Schwarz	ESCI / EMI TEST RECEIVER	01/24/2014	Annual	01/24/2015	100584
HD	MA240/ Antenna Position Tower	N/A	N/A	N/A	556
EMCO	1050/ Turn Table	N/A	N/A	N/A	114
HD GmbH	HD 100/ Controller	N/A	N/A	N/A	13
HD GmbH	KMS 560/ SlideBar	N/A	N/A	N/A	12
Rohde & Schwarz	SCU-18/ Signal Conditioning Unit	09/10/2013	Annual	09/10/2014	10094
CERNEK	CBL18265035 / POWER AMP	07/24/2013	Annual	07/24/2014	22966
CERNEK	CBL26405040 / POWER AMP	04/04/2014	Annual	04/04/2015	19660
Schwarzbeck	BBHA 9120D/ Horn Antenna	07/05/2013	Biennial	07/05/2015	1151
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	10/30/2012	Biennial	10/30/2014	BBHA9170124
Rohde & Schwarz	FSP / Spectrum Analyzer	01/24/2014	Annual	01/24/2015	839117/011
Wainwright Instrument	WHF3.0/18G-10EF / High Pass Filter	02/03/2014	Annual	02/03/2015	F6
Wainwright Instrument	WHNX6.0/26.5G-6SS / High Pass Filter	04/09/2014	Annual	04/09/2015	1
Wainwright Instrument	WHNX7.0/18G-8SS / High Pass Filter	04/04/2014	Annual	04/04/2015	29
Wainwright Instrument	WRCJ2400/2483.5-2370/2520-60/14SS Band Reject Filter	06/24/2013	Annual	06/24/2014	1
TESCOM	TC-3000C / BLUETOOTH TESTER	04/24/2014	Annual	04/24/2015	3000C000276
Rohde & Schwarz	CBT / BLUETOOTH TESTER	05/07/2014	Annual	05/07/2015	100422
Rohde & Schwarz	LOOP ANTENNA	08/14/2012	Biennial	08/14/2014	100179
CERNEK	CBL06185030 / POWER AMP	07/24/2013	Annual	07/24/2014	22965
CERNEK	CBLU1183540 / POWER AMP	07/24/2013	Annual	07/24/2014	22964

Note:

This equipment (WHNX6.0/26.5G-6SS / High Pass Filter) is used after 04/09/2014 and actual calibration date is 04/09/2014

This equipment (TC-3000C / BLUETOOTH TESTER) is used after 04/24/2014 and actual calibration date is 04/24/2014

This equipment (CBT / BLUETOOTH TESTER) is used after 05/07/2014 and actual calibration date is 05/07/2014