



HCT CO., LTD.

CERTIFICATE OF COMPLIANCE FCC Certification

Applicant Name:
LG Electronics MobileComm U.S.A., Inc.

Address:
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Date of Issue:
May 29, 2014

Test Site/Location:
HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-
myeon, Icheon-si, Gyeonggi-do, Korea

Report No.: HCT-R-1405-F014-1

HCT FRN: 0005866421

FCC ID: ZNFD855P

APPLICANT: LG Electronics MobileComm U.S.A., Inc.

FCC Model(s): LG-D855P

Additional FCC Model(s): LG-D855p, D855P, D855p, LGD855P, LGD855p, LG-D855AR, LG-D855ar, LGD855AR, LGD855ar, D855AR, D855ar

EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC

FCC Classification: Licensed Portable Transmitter Held to Ear (PCE)

FCC Rule Part(s): §22, §24, §2

Tx Frequency: 824.20 - 848.80 MHz (GSM850)
826.40 - 846.60 MHz (WCDMA850)
1 850.20 - 1 909.80 MHz (GSM1900)
1 852.4 - 1 907.6 MHz (WCDMA1900)

Rx Frequency: 869.20 - 893.80 MHz (GSM850)
871.40 - 891.60 MHz (WCDMA850)
1 930.20 - 1 989.80 MHz (GSM1900)
1 932.4 - 1 987.6 MHz (WCDMA1900)

Max. RF Output Power Normal battery Charger: 0.514 W GSM850 (27.11 dBm) / 0.565 W GSM1900 (27.52 dBm)
0.213 W GSM850 EDGE (23.29 dBm) / 0.353 W GSM1900 EDGE (25.48 dBm)
0.101 W WCDMA850 (20.05 dBm) / 0.229 W WCDMA1900 (23.60 dBm)

Max. RF Output Power Wireless battery Charger: 0.476 W GSM850 (26.78 dBm) / 0.595 W GSM1900 (27.74 dBm)
0.208 W GSM850 EDGE (23.19 dBm) / 0.388 W GSM1900 EDGE (25.89 dBm)
0.074 W WCDMA850 (18.69 dBm) / 0.240 W WCDMA1900 (23.80 dBm)

Emission Designator(s): 244 KGXW (GSM850) 244 KGXW (GSM1900)
261 KG7W (GSM850 EDGE) 250 KG7W (GSM1900 EDGE)
4M15F9W (WCDMA850) 4M17F9W (WCDMA1900)

The measurements shown in this report were made in accordance with the procedures specified in §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)

Report prepared by
: Jong Seok Lee
Test engineer of RF Team

Approved by
: Chang Seok Choi
Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
---	---------------------------------------	--	--

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1405-F014	May 20, 2014	- First Approval Report
HCT-R-1405-F014-1	May 29, 2014	- Insert the Information for WCP on Section 4 - Add the Actually Calibration Dates on Section 4 - Revise the Frequency Stability Limit on Section 3.5 and 5.0

Table of Contents

1. GENERAL INFORMATION		4
2. INTRODUCTION		5
2.1. EUT DESCRIPTION.....		5
2.2. MEASURING INSTRUMENT CALIBRATION.....		5
2.3. TEST FACILITY		5
3. DESCRIPTION OF TESTS		6
3.1 ERP/EIRP RADIATED POWER AND RADIATED SPURIOUS EMISSIONS.....		6
3.2 PEAK- TO- AVERAGE RATIO		7
3.3 OCCUPIED BANDWIDTH.....		9
3.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....		10
3.5 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE		11
4. LIST OF TEST EQUIPMENT		12
5. SUMMARY OF TEST RESULTS		13
6. SAMPLE CALCULATION		14
7. TEST DATA		15
7.1 EFFECTIVE RADIATED POWER OUTPUT _stand alone		15
7.2 EFFECTIVE RADIATED POWER OUTPUT _with wireless charging pad		16
7.3 EQUIVALENT ISOTROPIC RADIATED POWER _ stand alone.....		17
7.4 EQUIVALENT ISOTROPIC RADIATED POWER _with wireless charging pad.....		18
7.5 RADIATED SPURIOUS EMISSIONS _ stand alone.....		19
7.5.1 RADIATED SPURIOUS EMISSIONS (GSM850)		19
7.5.2 RADIATED SPURIOUS EMISSIONS (GSM1900)		20
7.5.3 RADIATED SPURIOUS EMISSIONS (WCDMA850)		21
7.5.4 RADIATED SPURIOUS EMISSIONS (WCDMA1900).....		22
7.6 RADIATED SPURIOUS EMISSIONS _ with wireless charging pad.....		23
7.6.1 RADIATED SPURIOUS EMISSIONS (GSM850)		23
7.6.2 RADIATED SPURIOUS EMISSIONS (GSM1900)		24
7.6.3 RADIATED SPURIOUS EMISSIONS (WCDMA850)		25
7.6.4 RADIATED SPURIOUS EMISSIONS (WCDMA1900).....		26
7.7 PEAK-TO-AVERAGE RATIO		27
7.8 OCCUPIED BANDWIDTH		28
7.9 CONDUCTED SPURIOUS EMISSIONS		29
7.9.1 BAND EDGE.....		29
7.10 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE		30
7.10.1 FREQUENCY STABILITY (GSM850).....		30
7.10.2 FREQUENCY STABILITY (GSM1900).....		31
7.10.3 FREQUENCY STABILITY (WCDMA850).....		32
7.10.4 FREQUENCY STABILITY (WCDMA1900).....		33
8. TEST PLOTS.....		34

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name: LG Electronics MobileComm U.S.A., Inc.

Address: 1000 Sylvan Avenue, Englewood Cliffs NJ 07632

FCC ID: ZNFD855P

Application Type: Certification

FCC Classification: Licensed Portable Transmitter Held to Ear (PCE)

FCC Rule Part(s): §22, §24, §2

EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC

FCC Model(s): LG-D855P

Additional FCC Model(s): LG-D855p, D855P, D855p, LGD855P, LGD855p, LG-D855AR, LG-D855ar, LGD855AR, LGD855ar, D855AR, D855ar

Tx Frequency: 824.20 - 848.80 MHz (GSM850)
826.40 - 846.60 MHz (WCDMA850)
1 850.20 - 1 909.80 MHz (GSM1900)
1 852.4 - 1 907.6 MHz (WCDMA1900)

Rx Frequency: 869.20 - 893.80 MHz (GSM850)
871.40 - 891.60 MHz (WCDMA850)
1 930.20 - 1 989.80 MHz (GSM1900)
1 932.4 - 1 987.6 MHz (WCDMA1900)

Max. RF Output Power Normal battery Charger: 0.514 W GSM850 (27.11 dBm) / 0.565 W GSM1900 (27.52 dBm)
0.213 W GSM850 EDGE (23.29 dBm) / 0.353 W GSM1900 EDGE (25.48 dBm)
0.101 W WCDMA850 (20.05 dBm) / 0.229 W WCDMA1900 (23.60 dBm)

Max. RF Output Power Wireless battery Charger: 0.476 W GSM850 (26.78 dBm) / 0.595 W GSM1900 (27.74 dBm)
0.208 W GSM850 EDGE (23.19 dBm) / 0.388 W GSM1900 EDGE (25.89 dBm)
0.074 W WCDMA850 (18.69 dBm) / 0.240 W WCDMA1900 (23.80 dBm)

Emission Designator(s): 244 KGXW (GSM850) 244 KGXW (GSM1900)
261 KG7W (GSM850 EDGE) 250 KG7W (GSM1900 EDGE)
4M15F9W (WCDMA850) 4M17F9W (WCDMA1900)

Date(s) of Tests: April 10, 2014 ~ May 19, 2014

Antenna Specification Manufacturer: AT&C Co. LTD.
Antenna type: Internal Antenna
Peak Gain: GSM850/ WCDMA850 : -6.29 dBi
GSM1900/ WCDMA1900 : -2.19 dBi

FCC CERTIFICATION REPORT

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



2. INTRODUCTION

2.1. EUT DESCRIPTION

The LG Electronics MobileComm U.S.A., Inc. LG-D855P Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC consists of GPRS Class12, EDGE12, GSM850, GSM1900, WCDMA850, WCDMA1900, HSDPA, HSUPA and DC-HSDPA.

Note : All test performed with the battery cover already incorporate the NFC antenna and Wireless charging capability.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



3. DESCRIPTION OF TESTS

3.1 ERP/EIRP RADIATED POWER AND RADIATED SPURIOUS EMISSIONS

Note: ERP(Effective Radiated Power), EIRP(Effective Isotropic Radiated Power)

Test Procedure

Radiated emission measurements are performed in the Fully-anechoic chamber. The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-C-2004 Clause 2.2.17. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission. The level and position of the maximized emission is recorded with the spectrum analyzer using a positive peak detector.

A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(dBm)} = P_{g(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

The maximum EIRP is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

Radiated spurious emissions

1. Frequency Range : 30 MHz ~ 10th Harmonics of highest channel fundamental frequency.
2. The EUT was setup to maximum output power. The 100 kHz RBW was used to scan from 30 MHz to 1 GHz. Also, the 1 MHz RBW was used to scan from 1 GHz to 10 GHz(GSM850/WCDMA850) or 20 GHz(GSM1900/WCDMA1900). The high, low and a middle channel were tested for out of band measurements.

FCC CERTIFICATION REPORT

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



3.2 PEAK- TO- AVERAGE RATIO

Test Procedure

Peak to Average Power Ratio is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r01, June 7, 2013, Section 5.7.

- Section 5.7.1 CCDF Procedure

- a) Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
- b) Set the number of counts to a value that stabilizes the measured CCDF curve;
- c) Set the measurement interval as follows:
 - 1) for continuous transmissions, set to 1 ms,
 - 2) for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
- d) Record the maximum PAPR level associated with a probability of 0.1%.

- Section 5.7.2 Alternate Procedure

Use one of the procedures presented in 5.1 to measure the total peak power and record as P_{Pk} . Use one of the applicable procedures presented 5.2 to measure the total average power and record as P_{Avg} . Determine the P.A.R. from: $P.A.R_{(dB)} = P_{Pk (dBm)} - P_{Avg (dBm)}$ (P_{Avg} = Average Power + Duty cycle Factor)

5.1.1 Peak power measurements with a spectrum/signal analyzer or EMI receiver

The following procedure can be used to determine the total peak output power.

- a) Set the RBW \geq OBW.
- b) Set VBW $\geq 3 \times$ RBW.
- c) Set span $\geq 2 \times$ RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Ensure that the number of measurement points \geq span/RBW.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the peak amplitude level.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P

5.2.2 Procedures for use with a spectrum/signal analyzer when EUT cannot be configured to transmit continuously and sweep triggering/signal gating cannot be properly implemented

If the EUT cannot be configured to transmit continuously (burst duty cycle < 98%), then one of the following procedures can be used. The selection of the applicable procedure will depend on the characteristics of the measured burst duty cycle.

Measure the burst duty cycle with a spectrum/signal analyzer or EMC receiver can be used in zero-span mode if the response time and spacing between bins on the sweep are sufficient to permit accurate measurement of the burst on/off time of the transmitted signal.

5.2.2.2 Constant burst duty cycle

If the measured burst duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent), then:


- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW ≥ 3 x RBW.
- d) Number of points in sweep ≥ 2 × span / RBW. (This gives bin-to-bin spacing ≤ RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (power averaging).
- g) Set sweep trigger to “free run”.
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
- j) Add 10 log (1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission).

For example, add 10 log (1/0.25) = 6 dB if the duty cycle is a constant 25%.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	
			FCC ID: ZNFD855P

3.3 OCCUPIED BANDWIDTH.

Test set-up

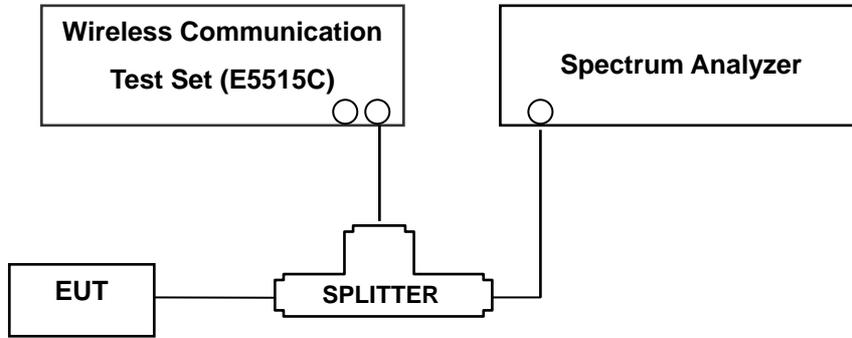

(Configuration of conducted Emission measurement)

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

Test Procedure

OBW is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r01, June 7, 2013, Section 4.2..

The EUT makes a call to the communication simulator. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels(low, middle and high operational range.)

The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



3.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.

Test Procedure

Spurious and harmonic emissions at antenna terminal is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r01, June 7, 2013, Section 6.0.

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer.

On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB. The RBW settings used in the testing are greater than 1 % of the occupied bw. The 1 MHz RBW was used to scan from 10 MHz to 10 GHz. (GSM1900 Mode: 10 MHz to 20 GHz). A display line was placed at - 13 dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Measurements of all out of band are made on RBW = 1MHz and VBW \geq 3 MHz in the worst case despite RBW = 100 kHz and VBW \geq 300 kHz upon 1 GHz.

- RBW = 1 MHz
- VBW \geq 3 MHz
- Detector = Peak
- Trace Mode = max hold
- Sweep time = auto
- Number of points in sweep $\geq 2 * \text{Span} / \text{RBW}$

- Band Edge Requirement : According to FCC 22.917 , 24.238(a) specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

The EUT makes a call to the communication simulator. The power was measured with R&S Spectrum Analyzer. All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The center frequency of spectrum is the band edge frequency and span is 1MHz RB of the spectrum is 3KHz and VB of the spectrum is 3KHz (GSM)

The center frequency of spectrum is the band edge frequency and span is 5MHz RB of the spectrum is 100KHz and VB of the spectrum is 100KHz(WCDMA)


NOTES: The analyzer plot offsets were determined by below conditions.

- For GSM850 and WCDMA850, total offset 26.6dBm = 20dBm attenuator + 6dBm Divider + 0.6dBm RF cables.
- For GSM1900 and WCDMA1900, total offset 27.7dBm = 20dBm attenuator + 6dBm Divider + 1.7dBm RF cables.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P

3.5 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

Test Set-up

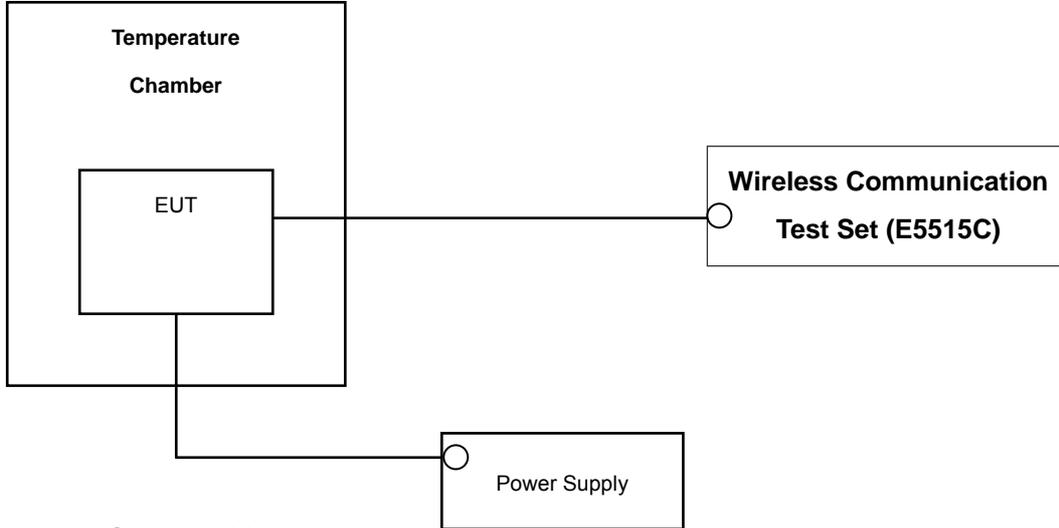

* Nominal Operating Voltage

Test Procedure

Frequency stability is tested in accordance with ANSI/TIA-603-C-2004 section 2.2.2.

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from battery end point to 115 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification — the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block(GSM1900/WCDAM1900). The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency(GSM850/WCDAM850).

Time Period and Procedure:

The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).

1. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
2. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

NOTE: The EUT is tested down to the battery endpoint.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibration Interval	Calibration Due
LG Electronics USA	WCP-300/WCP (FCC ID : BEJWCP300)	303HYR026898	-	-	-
Agilent	N1921A/ Power Sensor	MY45241059	07/11/2013	Annual	07/11/2014
Agilent	N1911A/ Power Meter	MY45100523	01/24/2014	Annual	01/24/2015
MITEQ	AMF-6D-001180-35-20P/AMP	1081666	09/12/2013	Annual	09/12/2014
Wainwright	WHK1.2/15G-10EF/H.P.F	4	06/24/2013	Annual	06/24/2014
Wainwright	WHK3.3/18G-10EF/H.P.F	2	06/24/2013	Annual	06/24/2014
Hewlett Packard	11667B / Power Splitter	10545	02/22/2014	Annual	02/22/2015
Digital	EP-3010/ Power Supply	3110117	10/29/2013	Annual	10/29/2014
Schwarzbeck	UHAP/ Dipole Antenna	557	03/05/2013	Biennial	03/05/2015
Schwarzbeck	UHAP/ Dipole Antenna	558	05/03/2013	Biennial	05/03/2015
Korea Engineering	KR-1005L / Chamber	KRAB05063-3CH	10/30/2013	Annual	10/30/2014
Schwarzbeck	BBHA 9120D/ Horn Antenna	1191	12/03/2013	Biennial	12/03/2015
Schwarzbeck	BBHA 9120D/ Horn Antenna	1151	10/05/2013	Biennial	10/05/2015
Agilent	E4440A/Spectrum Analyzer	US45303008	04/09/2014	Annual	04/09/2015
WEINSCHL	ATTENUATOR	BR0592	10/28/2013	Annual	10/28/2014
REOHDE&SCHWARZ	FSV40/Spectrum Analyzer	1307.9002K40-100931-NK	06/10/2013	Annual	06/10/2014
Agilent	8960 (E5515C)/ Base Station	GB45070669	08/31/2013	Annual	08/31/2014

FCC CERTIFICATION REPORT

www.hct.co.kr		
Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC
		FCC ID: ZNFD855P

5. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result
2.1049, 22.917(a), 24.238(a)	Occupied Bandwidth	N/A	CONDUCTED	PASS
2.1051, 22.917(a), 24.238(a)	Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions		PASS
* 2.1046	Conducted Output Power	-		PASS
24.232(d)	Peak- to- Average Ratio	< 13 dB		PASS
2.1055, 22.355, 24.235	Frequency stability / variation of ambient temperature	< 2.5 ppm		PASS
22.913(a)(2) 24.232(c)	Effective Radiated Power	< 7 Watts max. ERP	RADIATED	PASS
	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP		PASS
2.1053, 22.917(a), 24.238(a)	Radiated Spurious and Harmonic Emissions	< 43 + 10log10 (P[Watts]) for all out-of band emissions		PASS

*: See SAR Report

6. SAMPLE CALCULATION

A. ERP Sample Calculation

Mode	Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
	channel	Freq.(MHz)						W	dBm
GSM850	128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

ERP = SubstituteLEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 0.8 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power (**ERP**).

B. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

FCC CERTIFICATION REPORT

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P

7. TEST DATA

7.1 EFFECTIVE RADIATED POWER OUTPUT_stand alone

(GSM850 Mode)

Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-24.01	38.55	-10.59	0.85	H	0.514	27.11
190	836.60	-24.37	38.01	-10.53	0.89	H	0.456	26.59
251	848.80	-24.51	37.87	-10.48	0.88	H	0.448	26.51
EDGE 128	824.20	-27.83	38.55	-10.59	0.85	H	0.213	23.29

(WCDMA850 Mode)

Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
4132	826.40	-31.12	31.47	-10.58	0.84	H	0.101	20.05
4183	836.60	-31.12	31.26	-10.53	0.89	H	0.096	19.84
4233	846.60	-31.84	30.72	-10.49	0.85	V	0.087	19.38

Note: Standard batteries are the only options for this phone. And a peak detector is used.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. Turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For WCDMA, GSM signals, a peak detector is used, with $RBW \geq OBW$, $VBW \geq 3 \times RBW$. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is z plane in GSM850 and WCDMA850 (y plane ch 4233) mode. Also worst case of detecting Antenna is in horizontal polarization in GSM850 and WCDMA850 (channel 4233 : vertical polarization) mode.

The EDGE mode testing were performed using 1Tx because 1Tx is highest power in EDGE mode.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P



7.2 EFFECTIVE RADIATED POWER OUTPUT_with wireless charging pad

(GSM850 Mode)

Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-24.49	38.07	-10.59	0.85	H	0.460	26.63
190	836.60	-24.68	37.70	-10.53	0.89	H	0.424	26.28
251	848.80	-24.24	38.14	-10.48	0.88	H	0.476	26.78
EDGE 251	848.80	-27.83	38.14	-10.48	0.88	H	0.208	23.19

(WCDMA850 Mode)

Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
4132	826.40	-32.48	30.11	-10.58	0.84	H	0.074	18.69
4183	836.60	-32.39	29.99	-10.53	0.89	H	0.072	18.57
4233	846.60	-32.80	29.76	-10.49	0.85	H	0.069	18.42

Note: Standard batteries are the only options for this phone. And a peak detector is used.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. Turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For WCDMA, GSM signals, a peak detector is used, with $RBW \geq OBW$, $VBW \geq 3 \times RBW$. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is x plane in GSM850 and WCDMA850 mode. Also worst case of detecting Antenna is horizontal polarization in GSM850 and WCDMA850 mode.

The EDGE mode testing were performed using 1Tx because 1Tx is highest power in EDGE mode.

FCC CERTIFICATION REPORT

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P



7.3 EQUIVALENT ISOTROPIC RADIATED POWER_ stand alone

(GSM1900 Mode)

Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
512	1,850.20	-12.95	18.67	10.04	1.19	H	0.565	27.52
661	1,880.00	-13.63	18.10	10.04	1.23	H	0.490	26.91
810	1,909.80	-13.34	18.64	10.05	1.22	V	0.559	27.47
EDGE 512	1,850.20	-14.99	18.67	10.04	1.19	H	0.353	25.48

(WCDMA1900 Mode)

Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
9262	1,852.40	-17.36	14.26	10.04	1.19	H	0.204	23.11
9400	1,880.00	-17.95	13.78	10.04	1.23	H	0.181	22.59
9538	1,907.60	-17.11	14.77	10.05	1.22	V	0.229	23.60

Note: Standard batteries are the only options for this phone. And a peak detector is used.

NOTES:

Equivalent Isotropic Radiated Power Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. Turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For WCDMA, GSM signals, a peak detector is used, with $RBW \geq OBW$, $VBW \geq 3 \times RBW$. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is x plane in GSM1900 (z plane ch 810) and WCDMA1900 (z plane ch 9538) mode. Also worst case of detecting Antenna is in horizontal polarization in GSM1900 (channel 810 : vertical polarization) and WCDMA1900 (channel 9538 : vertical polarization) mode.

The EDGE mode testing were performed using 1Tx because 1Tx is highest power in EDGE mode.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P



7.4 EQUIVALENT ISOTROPIC RADIATED POWER_with wireless charging pad

(GSM1900 Mode)

Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
512	1,850.20	-12.79	18.83	10.04	1.19	H	0.586	27.68
661	1,880.00	-13.00	18.73	10.04	1.23	H	0.568	27.54
810	1,909.80	-13.07	18.91	10.05	1.22	H	0.595	27.74
EDGE 810	1,909.80	-14.92	18.91	10.05	1.22	H	0.388	25.89

(WCDMA1900 Mode)

Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
9262	1,852.40	-16.67	14.95	10.04	1.19	H	0.240	23.80
9400	1,880.00	-17.28	14.45	10.04	1.23	H	0.212	23.26
9538	1,907.60	-17.08	14.80	10.05	1.22	H	0.231	23.63

Note: Standard batteries are the only options for this phone. And a peak detector is used.

NOTES:

Equivalent Isotropic Radiated Power Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. Turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For WCDMA, GSM signals, a peak detector is used, with $RBW \geq OBW$, $VBW \geq 3 \times RBW$. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is x plane in GSM1900 and WCDMA1900 mode. Also worst case of detecting Antenna is in horizontal polarization in GSM1900 and WCDMA1900 mode.

The EDGE mode testing were performed using 1Tx because 1Tx is highest power in EDGE mode.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P



7.5 RADIATED SPURIOUS EMISSIONS_ stand alone

7.5.1 RADIATED SPURIOUS EMISSIONS (GSM850)

MEASURED OUTPUT POWER: _____ 27.11 dBm = 0.514 W

MODULATION SIGNAL: _____ GSM850

DISTANCE: _____ 3 meters

LIMIT: $43 + 10 \log_{10}(W) =$ _____ 40.11 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBd)	Substitute Level [dBm]	C.L	Pol.	ERP (dBm)	dBc
128 (824.2)	1,648.40	-46.62	7.55	-55.70	1.13	H	-49.28	76.39
	2,472.60	-47.45	8.39	-54.12	1.35	H	-47.08	74.18
	3,296.80	-48.94	10.07	-56.00	1.58	H	-47.51	74.62
190 (836.6)	1,673.20	-46.04	7.62	-55.28	1.12	H	-48.78	75.88
	2,509.80	-47.57	8.50	-54.15	1.35	V	-47.00	74.11
	3,346.40	-50.93	10.26	-58.14	1.61	H	-49.49	76.59
251 (848.8)	1,697.60	-42.61	7.69	-51.95	1.16	V	-45.42	72.53
	2,546.40	-47.61	8.57	-54.51	1.37	H	-47.31	74.42
	3,395.20	-51.98	10.25	-59.10	1.62	H	-50.47	77.58

NOTES: 1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---



7.5.2 RADIATED SPURIOUS EMISSIONS (GSM1900)

MEASURED OUTPUT POWER: 27.52 dBm = 0.565 W
 MODULATION SIGNAL: GSM1900
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 40.52 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	EIRP (dBm)	dBc
512 (1850.2)	3,700.40	-47.63	12.32	-53.35	1.73	H	-42.76	70.28
	5,550.60	-50.88	13.02	-51.38	2.12	H	-40.48	68.00
	7,400.80	-53.14	11.06	-43.63	2.42	H	-34.99	62.51
661 (1880.0)	3,760.00	-46.52	12.29	-51.84	1.66	H	-41.21	68.73
	5,640.00	-51.99	13.12	-52.27	2.11	V	-41.26	68.78
	7,520.00	-53.85	11.09	-44.84	2.35	V	-36.10	63.62
810 (1909.8)	3,819.60	-46.11	12.28	-51.22	1.80	H	-40.74	68.26
	5,729.40	-52.24	13.06	-52.30	2.14	V	-41.38	68.90
	7,639.20	-53.61	11.38	-43.85	2.41	V	-34.88	62.40

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P



7.5.3 RADIATED SPURIOUS EMISSIONS (WCDMA850)

MEASURED OUTPUT POWER: 20.05 dBm = 0.101 W
 MODULATION SIGNAL: WCDMA850
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 33.05 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBd)	Substitute Level [dBm]	C.L	Pol.	ERP (dBm)	dBc
4,132 (826.4)	1,652.80	-48.24	7.57	-57.47	1.13	V	-51.03	71.08
	2,479.20	-51.09	8.39	-57.77	1.34	V	-50.72	70.77
	3,305.60	-56.74	10.11	-63.83	1.59	H	-55.31	75.36
4,183 (836.6)	1,673.20	-45.61	7.62	-54.84	1.13	V	-48.35	68.40
	2,509.80	-54.55	8.50	-61.13	1.35	V	-53.98	74.03
	3,346.40	-54.74	10.26	-61.95	1.61	H	-53.30	73.35
4,233 (846.6)	1,693.20	-50.11	7.68	-59.45	1.15	H	-52.92	72.97
	2,539.80	-53.99	8.56	-60.55	1.37	V	-53.36	73.41
	3,386.40	-56.21	10.25	-63.34	1.61	H	-54.70	74.75

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P



7.5.4 RADIATED SPURIOUS EMISSIONS (WCDMA1900)

MEASURED OUTPUT POWER: 23.60 dBm = 0.229 W
 MODULATION SIGNAL: WCDMA1900
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 36.60 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	EIRP (dBm)	dBc
9262 (1852.4)	3,704.80	-41.92	12.32	-47.06	1.72	H	-36.46	60.06
	5,557.20	-50.37	13.03	-50.83	2.14	V	-39.94	63.54
	7,409.60	-52.83	11.05	-43.10	2.40	H	-34.45	58.05
9400 (1880.0)	3,760.00	-44.67	12.29	-49.99	1.66	H	-39.36	62.96
	5,640.00	-48.59	13.12	-48.87	2.11	V	-37.86	61.46
	7,520.00	-50.85	11.09	-41.84	2.35	H	-33.10	56.70
9538 (1907.6)	3,815.20	-44.44	12.29	-49.58	1.79	V	-39.07	62.67
	5,722.80	-44.18	13.08	-44.27	2.13	V	-33.32	56.92
	7,630.40	-54.03	11.36	-43.85	2.54	H	-35.03	58.63

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P



7.6 RADIATED SPURIOUS EMISSIONS_ with wireless charging pad

7.6.1 RADIATED SPURIOUS EMISSIONS (GSM850)

MEASURED OUTPUT POWER: _____ 26.78 dBm = 0.476 W

MODULATION SIGNAL: _____ GSM850

DISTANCE: _____ 3 meters

LIMIT: $43 + 10 \log_{10}(W) =$ _____ 39.78 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBd)	Substitute Level [dBm]	C.L	Pol.	ERP (dBm)	dBc
128 (824.2)	1,648.40	-46.94	7.55	-56.02	1.13	H	-49.60	76.38
	2,472.60	-47.44	8.39	-54.11	1.35	H	-47.07	73.85
	3,296.80	-48.39	10.07	-55.45	1.58	H	-46.96	73.74
190 (836.6)	1,673.20	-48.93	7.62	-58.17	1.12	H	-51.67	78.45
	2,509.80	-47.22	8.50	-53.80	1.35	H	-46.65	73.43
	3,346.40	-49.58	10.26	-56.79	1.61	H	-48.14	74.92
251 (848.8)	1,697.60	-44.99	7.69	-54.33	1.16	H	-47.80	74.58
	2,546.40	-47.38	8.57	-54.28	1.37	H	-47.08	73.86
	3,395.20	-53.26	10.25	-60.38	1.62	H	-51.75	78.53

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P



7.6.2 RADIATED SPURIOUS EMISSIONS (GSM1900)

MEASURED OUTPUT POWER: 27.74 dBm = 0.595 W
 MODULATION SIGNAL: GSM1900
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 40.74 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	EIRP (dBm)	dBc
512 (1850.2)	3,700.40	-51.59	12.32	-57.31	1.73	V	-46.72	74.46
	5,550.60	-55.51	13.02	-56.01	2.12	H	-45.11	72.85
	7,400.80	-58.08	11.06	-48.57	2.42	H	-39.93	67.67
661 (1880.0)	3,760.00	-50.11	12.29	-55.44	1.66	V	-44.80	72.54
	5,640.00	-56.11	13.12	-56.39	2.11	V	-45.38	73.12
	7,520.00	-57.86	11.09	-48.85	2.35	H	-40.11	67.85
810 (1909.8)	3,819.60	-49.27	12.28	-54.38	1.80	V	-43.90	71.64
	5,729.40	-57.53	13.06	-57.59	2.14	H	-46.67	74.41
	7,639.20	-58.30	11.38	-48.54	2.41	H	-39.57	67.31

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P

7.6.3 RADIATED SPURIOUS EMISSIONS (WCDMA850)

MEASURED OUTPUT POWER: 18.69 dBm = 0.074 W
 MODULATION SIGNAL: WCDMA850
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 31.69 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBd)	Substitute Level [dBm]	C.L	Pol.	ERP (dBm)	dBc
4,132 (826.4)	1,652.80	-47.76	7.57	-56.99	1.13	H	-50.55	69.24
	2,479.20	-51.74	8.39	-58.42	1.34	H	-51.37	70.06
	3,305.60	-54.70	10.11	-61.79	1.59	H	-53.27	71.96
4,183 (836.6)	1,673.20	-44.23	7.62	-53.46	1.13	H	-46.97	65.66
	2,509.80	-53.96	8.50	-60.54	1.35	H	-53.39	72.08
	3,346.40	-53.36	10.26	-60.57	1.61	H	-51.92	70.61
4,233 (846.6)	1,693.20	-48.32	7.68	-57.66	1.15	H	-51.13	69.82
	2,539.80	-52.28	8.56	-58.84	1.37	H	-51.65	70.34
	3,386.40	-55.36	10.25	-62.49	1.61	H	-53.85	72.54

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P



7.6.4 RADIATED SPURIOUS EMISSIONS (WCDMA1900)

MEASURED OUTPUT POWER: 23.80 dBm = 0.240 W
 MODULATION SIGNAL: WCDMA1900
 DISTANCE: 3 meters
 LIMIT: $43 + 10 \log_{10}(W) =$ 36.80 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	EIRP (dBm)	dBc
9262 (1852.4)	3,704.80	-42.28	12.32	-47.42	1.72	H	-36.82	60.62
	5,557.20	-50.68	13.03	-51.14	2.14	H	-40.25	64.05
	7,409.60	-55.64	11.05	-45.91	2.40	V	-37.26	61.06
9400 (1880.0)	3,760.00	-45.64	12.29	-50.96	1.66	H	-40.33	64.13
	5,640.00	-48.67	13.12	-48.95	2.11	H	-37.94	61.74
	7,520.00	-56.55	11.09	-47.54	2.35	H	-38.80	62.60
9538 (1907.6)	3,815.20	-45.12	12.29	-50.25	1.79	H	-39.75	63.55
	5,722.80	-43.13	13.08	-43.22	2.13	H	-32.27	56.07
	7,630.40	-56.59	11.36	-46.41	2.54	V	-37.59	61.39

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P

7.7 PEAK-TO-AVERAGE RATIO

Band	Ch.	Measured P _{Pk} (dBm)	Measured P _{Avg} (dBm)	P _{Avg} (Duty Cycle)			P.A.R. = P _{Pk} - P _{Avg} (dB)	Limit (dB)	Pass / Fail
				Tx _{Total} (ms)	Tx _{On} (ms)	Factor (dB)			
GSM1900	661	30.26	20.61	4.6232	0.5507	9.24	0.41	13	Pass
GSM1900 EDGE	661	25.64	12.90				3.50		Pass
WCDMA1900	9400	CCDF Procedure				2.95	Pass		

- Plots of the EUT's Peak- to- Average Ratio are shown Page 39 ~ 41, 44.

NOTES:

Peak to Average Power Ratio was tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r01, June 7, 2013, Section 5.7.

Only GSM(include EDGE) Mode was tested by Section 5.7.2 Alternate Procedure

$P.A.R_{(dB)} = P_{Pk} (dBm) - P_{Avg} (dBm)$ (P_{Avg} = Average Power + Duty cycle Factor)

Duty cycle Factor = $10 \log (1/x)$, $x = Tx_{On} / Tx_{Total}$

FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

7.8 OCCUPIED BANDWIDTH

Band	Channel	Frequency(MHz)	Data (GSM: kHz / WCDMA : MHz)
GSM850	128	824.20	243.0607
	190	836.60	244.1050
	251	848.80	240.5717
GSM850 EDGE	190	836.60	260.5183
GSM1900	512	1,850.20	241.1176
	661	1,880.00	244.2681
	810	1,909.80	242.3171
GSM1900 EDGE	661	1,880.00	250.1809
WCDMA850	4132	826.40	4.1520
	4183	836.60	4.1460
	4233	846.60	4.1464
WCDMA1900	9262	1852.40	4.1417
	9400	1880.00	4.1749
	9538	1907.60	4.1536

- Plots of the EUT's Occupied Bandwidth are shown Page 35 ~ 38, 41 ~ 44.

7.9 CONDUCTED SPURIOUS EMISSIONS

Band	Channel	Frequency of Maximum Harmonic (GHz)	Maximum Data (dBm)
GSM850	128	4.595190	-29.23
	190	4.626010	-29.46
	251	4.832260	-29.21
GSM1900	512	6.955910	-25.68
	661	8.841240	-25.90
	810	6.574060	-25.60
WCDMA850	4132	4.821330	-28.08
	4183	4.723420	-27.92
	4233	4.763680	-27.81
WCDMA1900	9262	8.859680	-25.01
	9400	5.996800	-25.38
	9538	6.979340	-26.01

- Plots of the EUT's Conducted Spurious Emissions are shown Page 57 ~ 68.

7.9.1 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 45 ~ 56.




7.10 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

7.10.1 FREQUENCY STABILITY (GSM850)

OPERATING FREQUENCY: 836,600,000 Hz
 CHANNEL: 190
 REFERENCE VOLTAGE: 3.8 VDC
 DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. ()	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	836 599 987	0	0.000 000	0.000
100%		-30	836 600 000	13.50	0.000 002	0.016
100%		-20	836 600 003	15.91	0.000 002	0.019
100%		-10	836 600 003	16.15	0.000 002	0.019
100%		0	836 600 005	18.07	0.000 002	0.022
100%		+10	836 600 005	18.84	0.000 002	0.023
100%		+30	836 600 001	14.34	0.000 002	0.017
100%		+40	836 600 002	15.49	0.000 002	0.019
100%		+50	836 599 999	12.61	0.000 002	0.015
115%		4.37	+20	836 600 001	14.46	0.000 002
Batt. Endpoint	3.23	+20	836 600 002	15.15	0.000 002	0.018

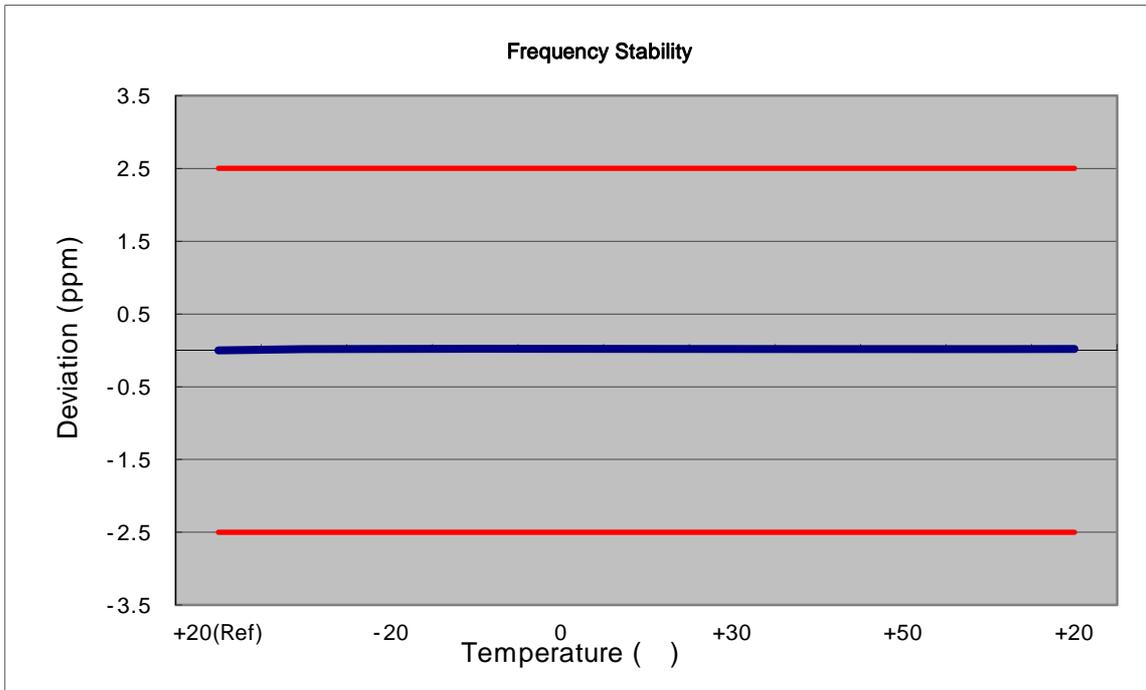


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

7.10.2 FREQUENCY STABILITY (GSM1900)

OPERATING FREQUENCY: 1880,000,000 Hz
 CHANNEL: 661
 REFERENCE VOLTAGE: 3.8 VDC
 DEVIATION LIM IT: -


Voltage (%)	Power (VDC)	Temp. ()	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	1879 999 943	0	0.000 000	0.000
100%		-30	1880 000 002	59.29	0.000 003	0.032
100%		-20	1879 999 996	53.70	0.000 003	0.029
100%		-10	1880 000 000	57.55	0.000 003	0.031
100%		0	1880 000 001	58.51	0.000 003	0.031
100%		+10	1880 000 000	57.16	0.000 003	0.030
100%		+30	1880 000 003	60.24	0.000 003	0.032
100%		+40	1880 000 003	60.83	0.000 003	0.032
100%		+50	1880 000 002	59.44	0.000 003	0.032
115%		4.37	+20	1880 000 000	57.26	0.000 003
Batt. Endpoint	3.23	+20	1880 000 001	57.93	0.000 003	0.031

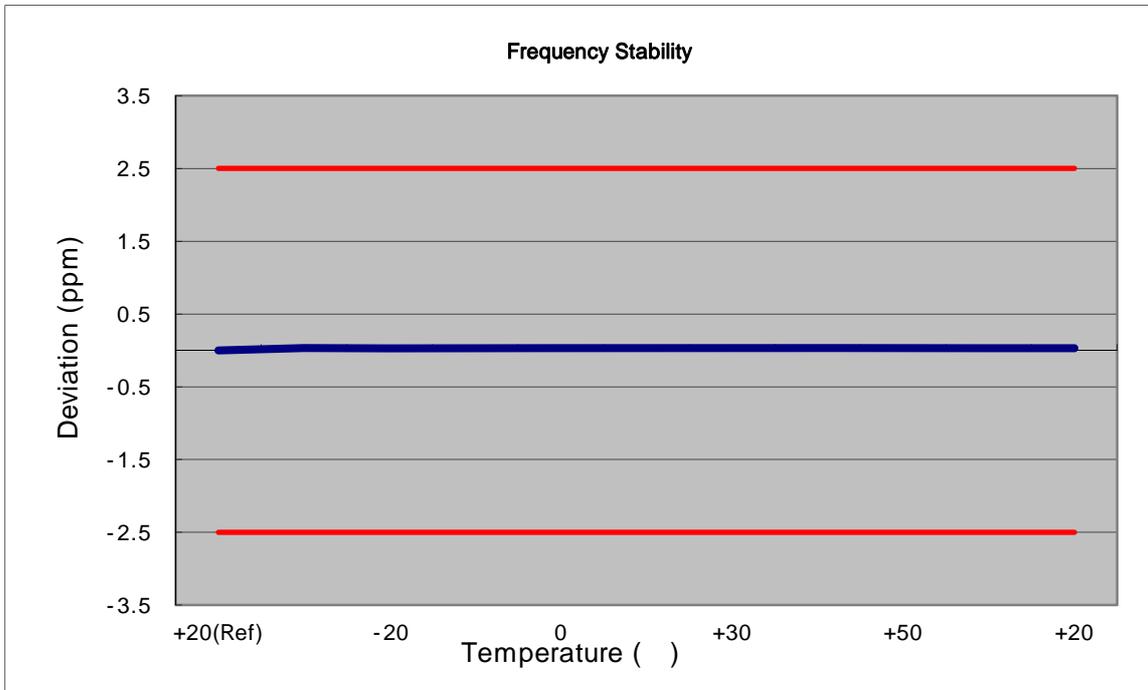

7.10.3 FREQUENCY STABILITY (WCDMA850)

OPERATING FREQUENCY: 836,600,000 Hz
 CHANNEL: 4183
 REFERENCE VOLTAGE: 3.8 VDC
 DEVIATION LIM IT: ± 0.000 25 % or 2.5 ppm


Voltage (%)	Power (VDC)	Temp. ()	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	836 600 003	0	0.000 000	0.000
100%		-30	836 599 998	-2.40	0.000 000	-0.003
100%		-20	836 600 004	3.58	0.000 000	0.004
100%		-10	836 599 996	-3.96	0.000 000	-0.005
100%		0	836 599 997	-3.25	0.000 000	-0.004
100%		+10	836 599 996	-4.23	-0.000 001	-0.005
100%		+30	836 599 997	-2.60	0.000 000	-0.003
100%		+40	836 600 002	2.05	0.000 000	0.002
100%		+50	836 599 997	-2.88	0.000 000	-0.003
115%	4.37	+20	836 600 003	3.09	0.000 000	0.004
Batt. Endpoint	3.23	+20	836 599 997	-3.15	0.000 000	-0.004

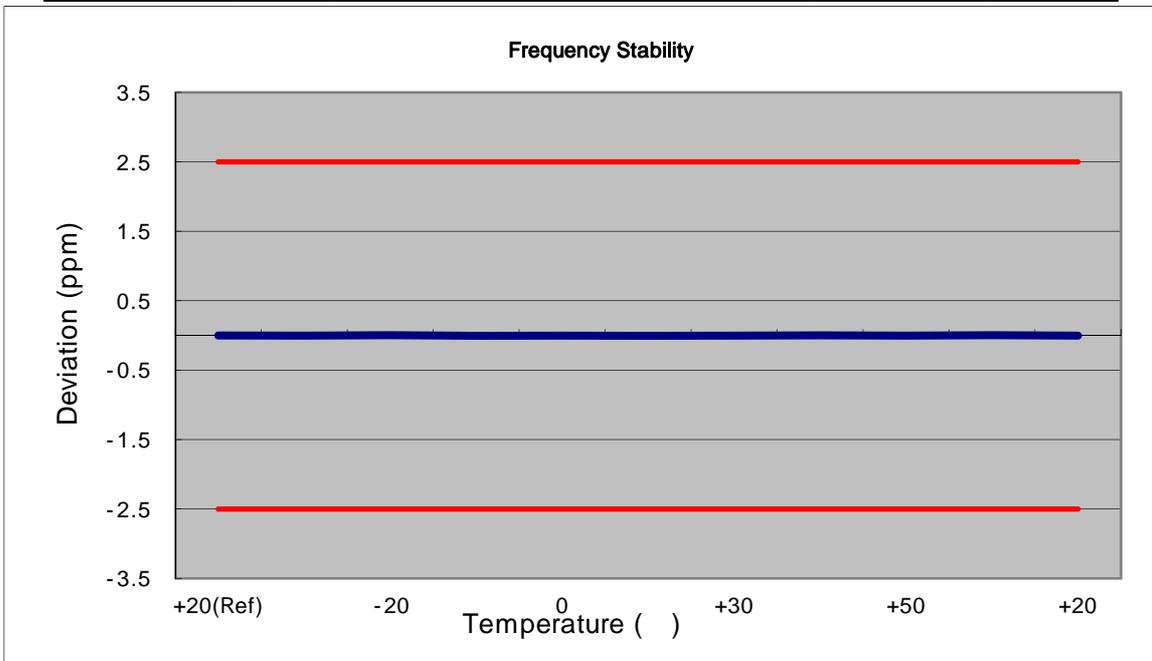

7.10.4 FREQUENCY STABILITY (WCDMA1900)

OPERATING FREQUENCY: 1,880,000,000 Hz
 CHANNEL: 9400
 REFERENCE VOLTAGE: 3.8 VDC
 DEVIATION LIMIT: -

Voltage (%)	Power (VDC)	Temp. ()	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	1879 999 991	0	0.000 000	0.000
100%		-30	1880 000 006	6.41	0.000 000	0.003
100%		-20	1880 000 008	8.47	0.000 000	0.005
100%		-10	1880 000 009	8.61	0.000 000	0.005
100%		0	1880 000 006	6.19	0.000 000	0.003
100%		+10	1880 000 008	7.82	0.000 000	0.004
100%		+30	1880 000 007	7.48	0.000 000	0.004
100%		+40	1880 000 007	7.29	0.000 000	0.004
100%		+50	1880 000 006	6.19	0.000 000	0.003
115%		4.37	+20	1880 000 006	6.04	0.000 000
Batt. Endpoint	3.23	+20	1880 000 006	6.32	0.000 000	0.003

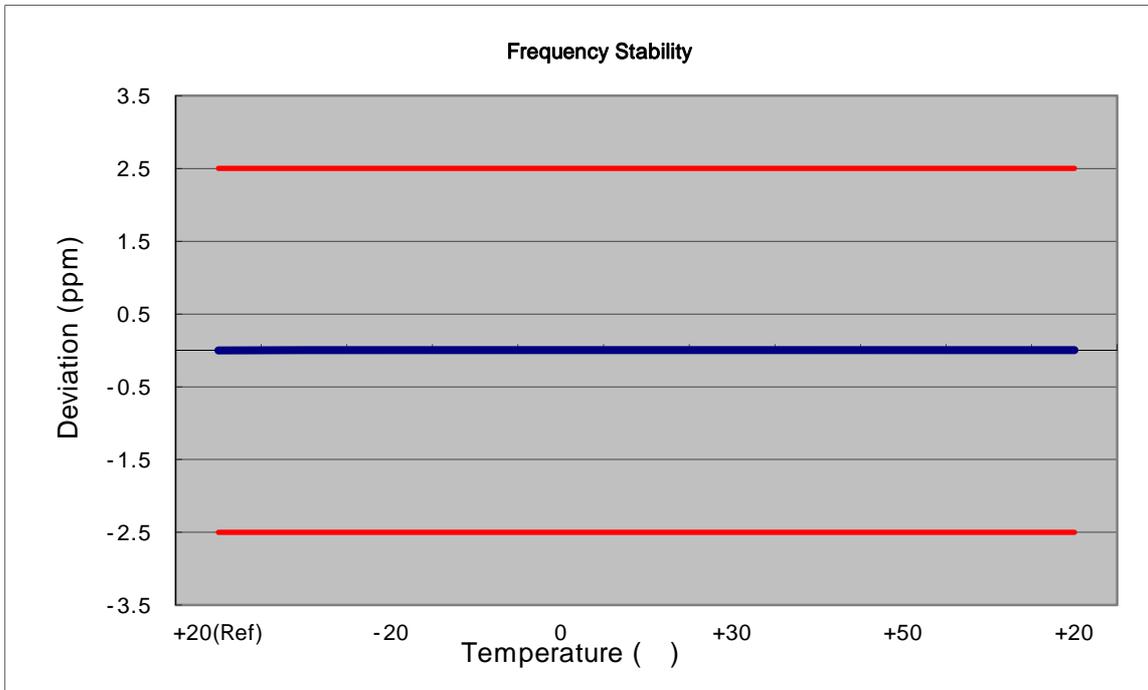





8. TEST PLOTS

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P

■ GSM850 MODE (128 CH.) Occupied Bandwidth

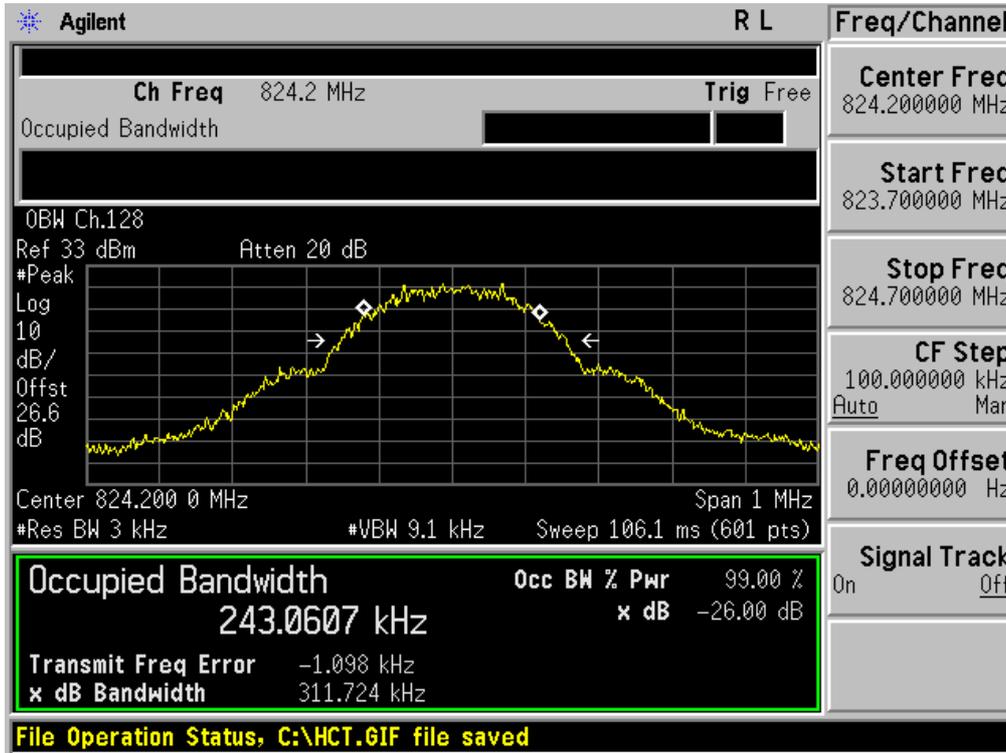


■ GSM850 MODE (190 CH.) Occupied Bandwidth

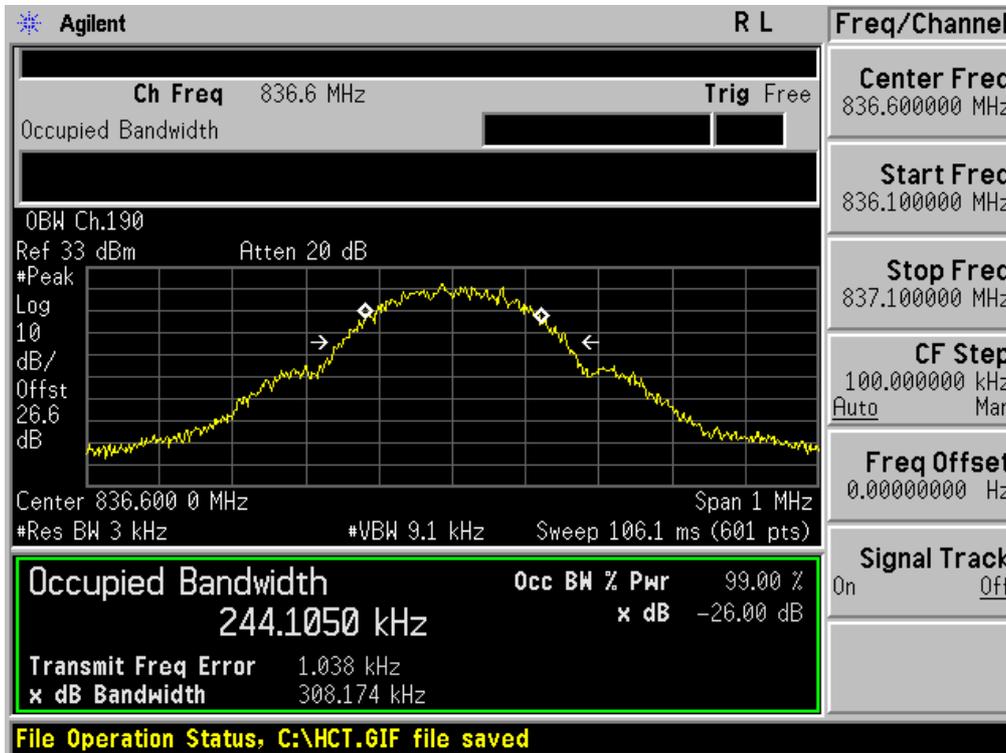


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

■ GSM850 MODE (251 CH.) Occupied Bandwidth

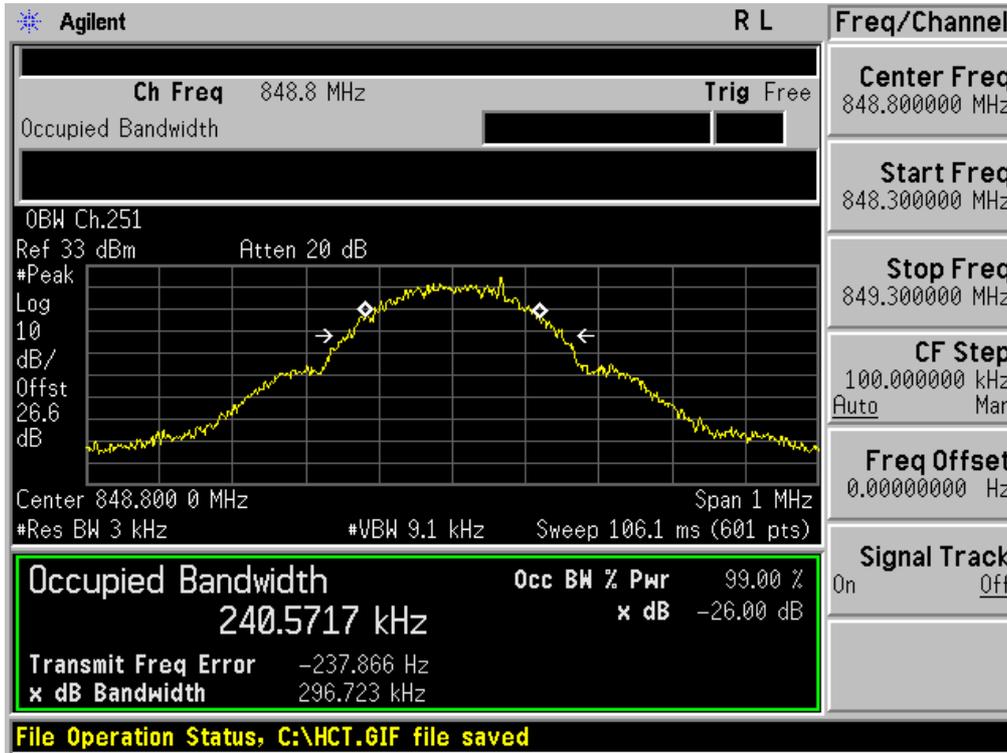


■ GSM850 EDGE (190 CH.) Occupied Bandwidth

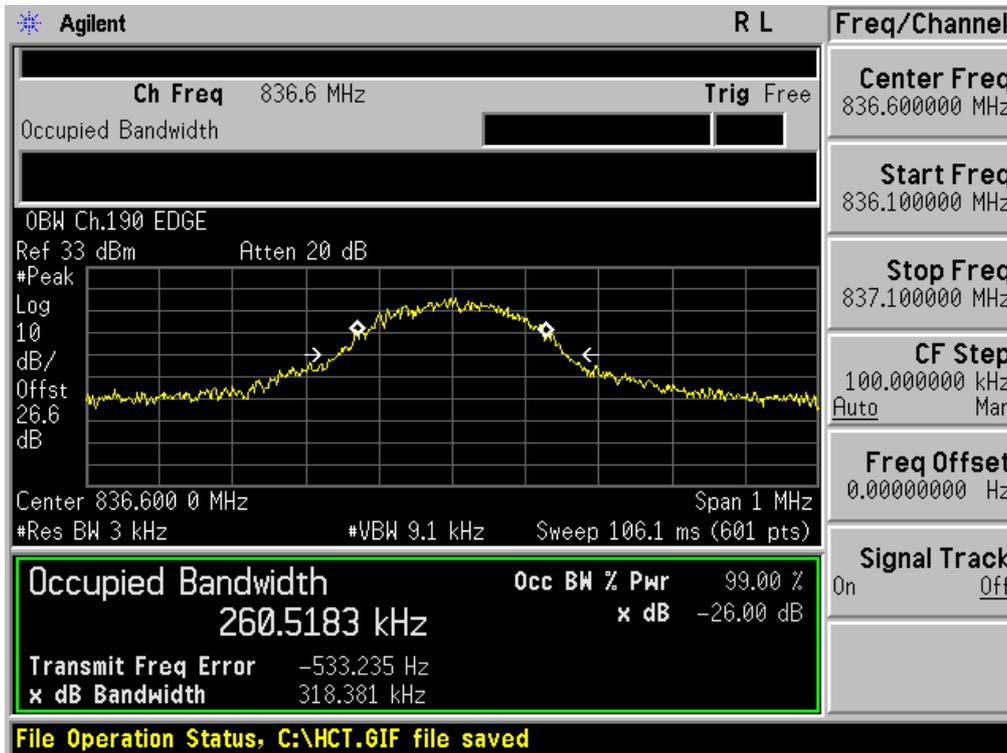


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

■ GSM1900 MODE (512 CH.) Occupied Bandwidth

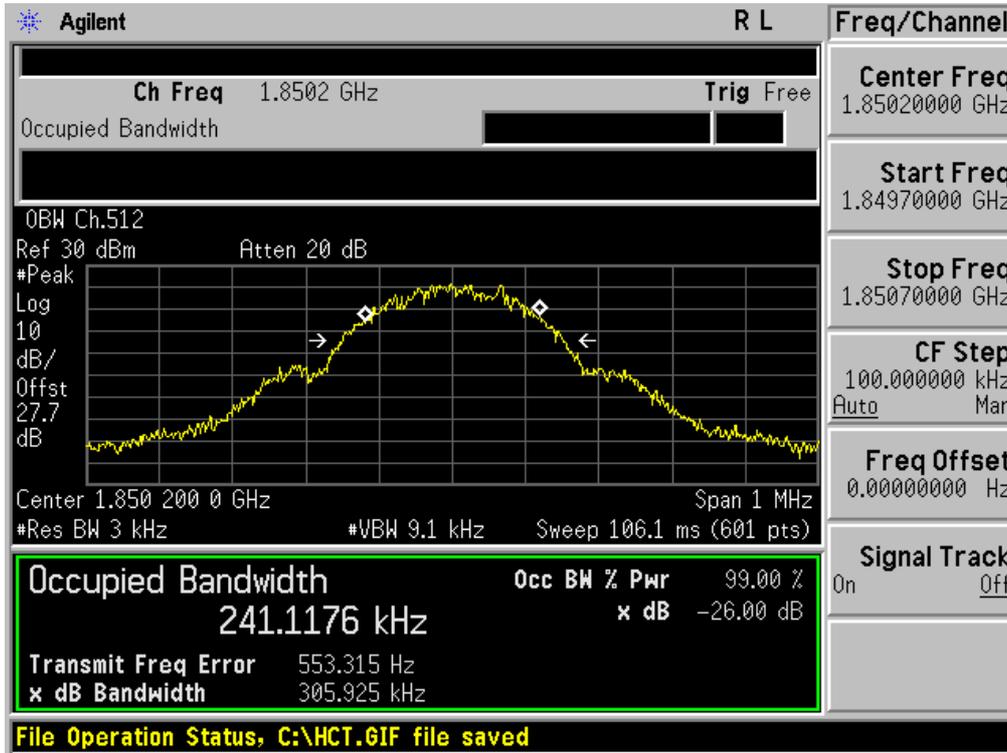


■ GSM1900 MODE (661 CH.) Occupied Bandwidth

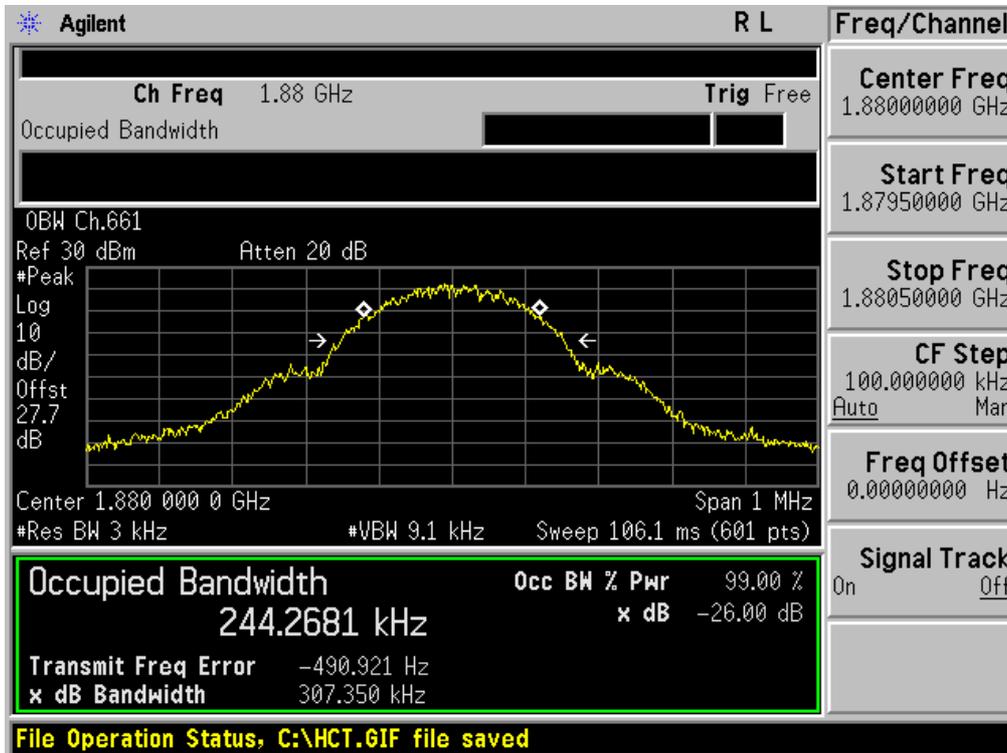


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

■ GSM1900 MODE (810 CH.) Occupied Bandwidth

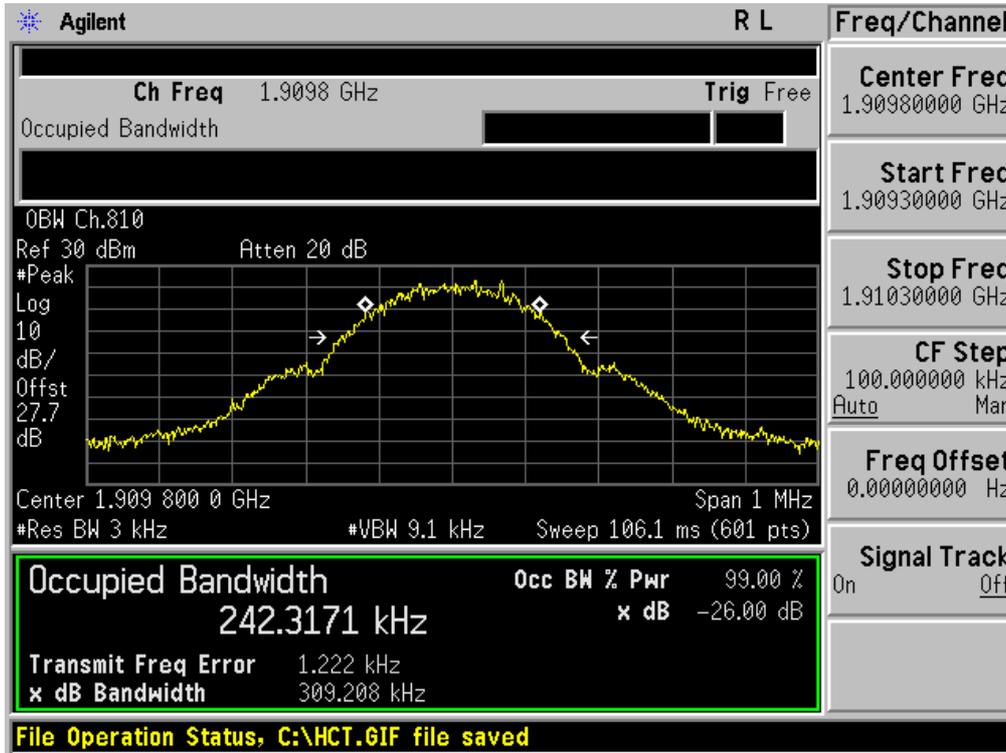

■ GSM1900 EDGE (661 CH.) Occupied Bandwidth

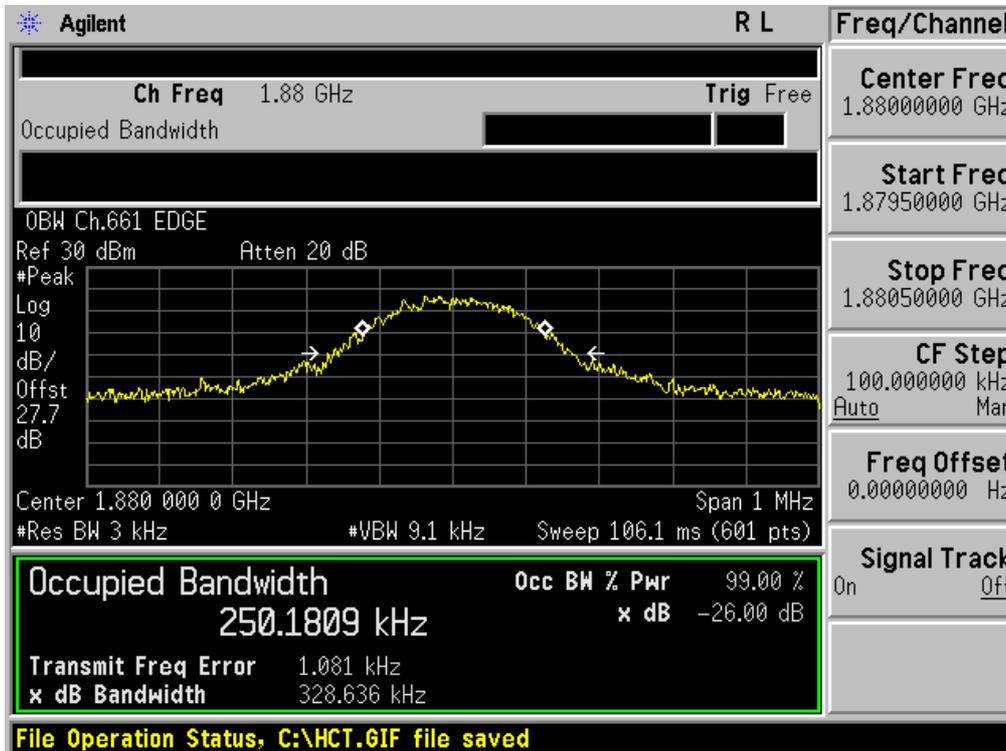


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio P_{Pk}



■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio P_{Avg}

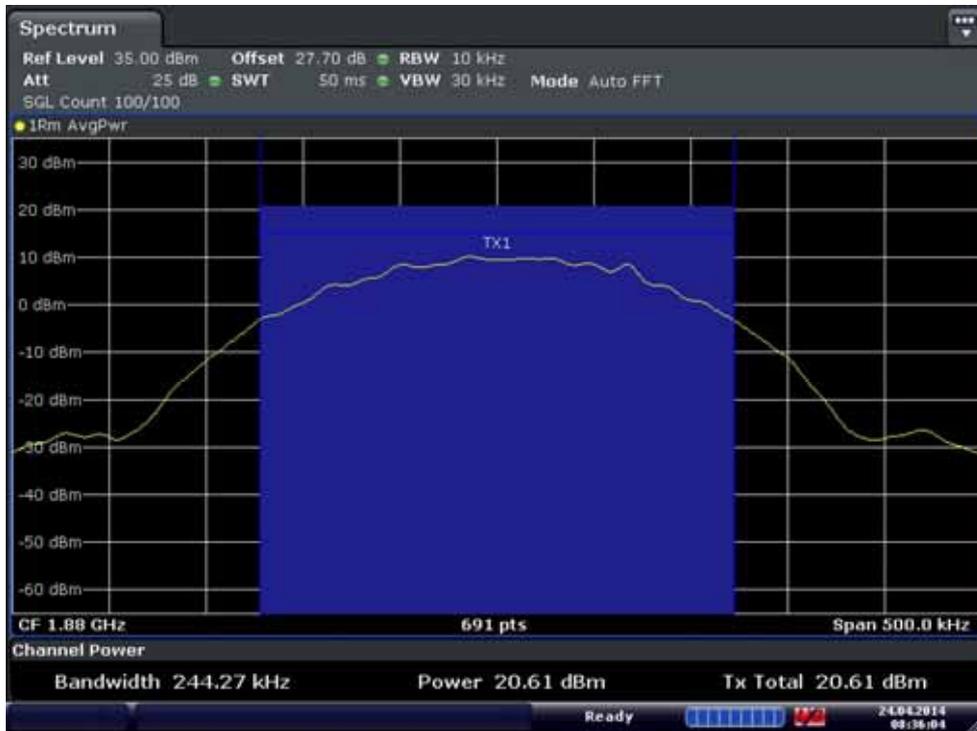

FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---

■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio P_{Avg}




■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio P_{Pk}




FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio P_{Avg}

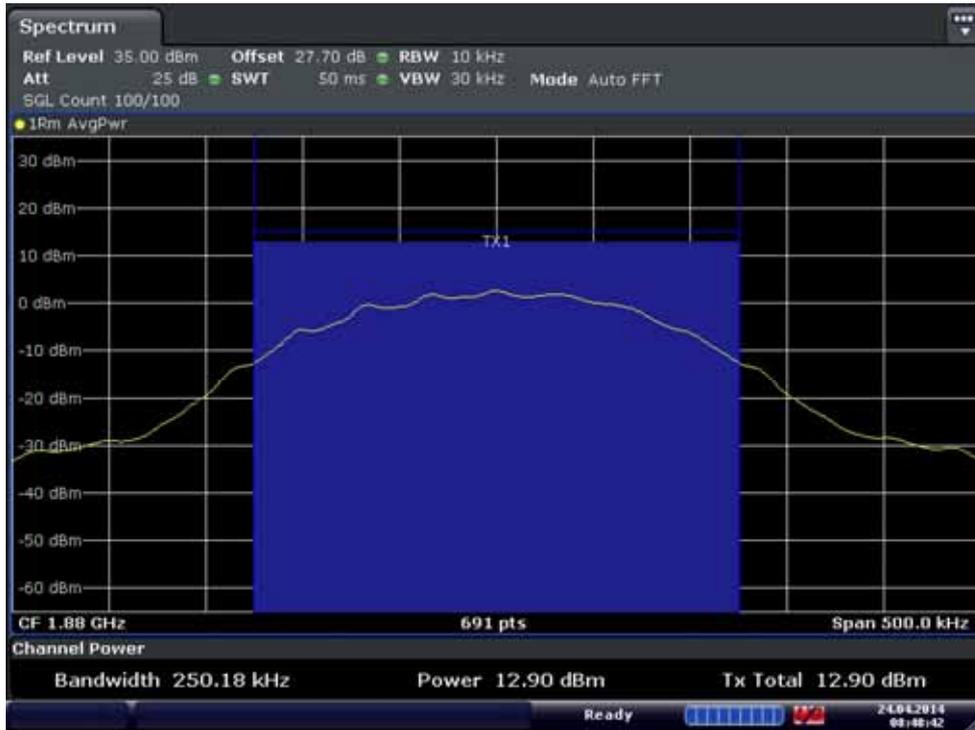


■ WCDMA850 MODE (4132 CH.) Occupied Bandwidth

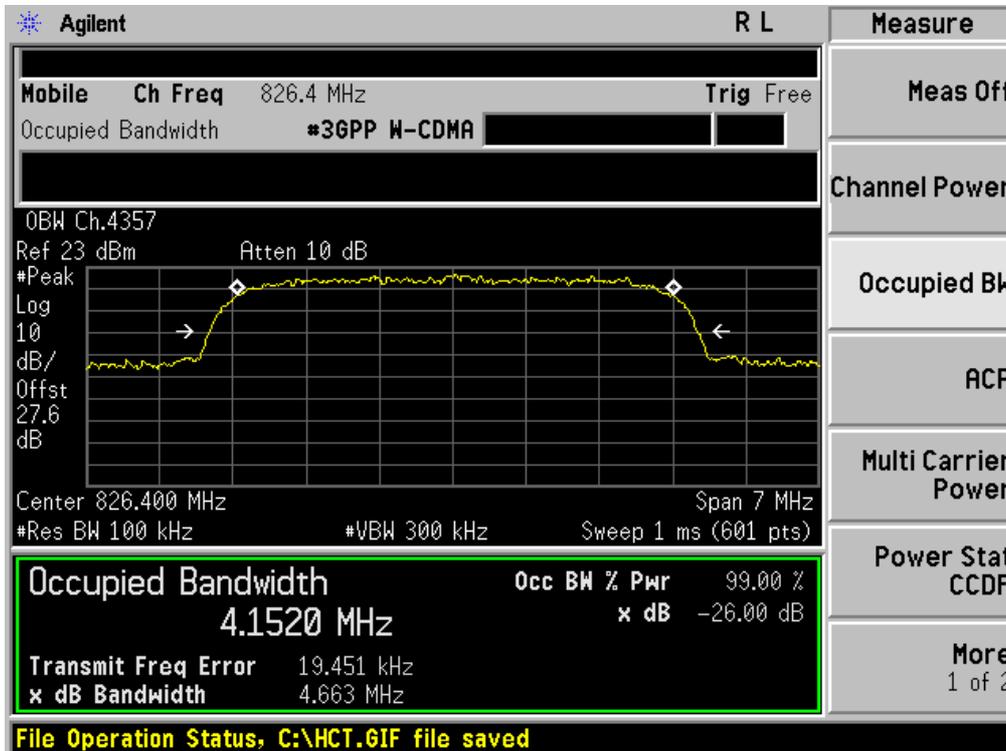


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

■ WCDMA850 MODE (4183 CH.) Occupied Bandwidth

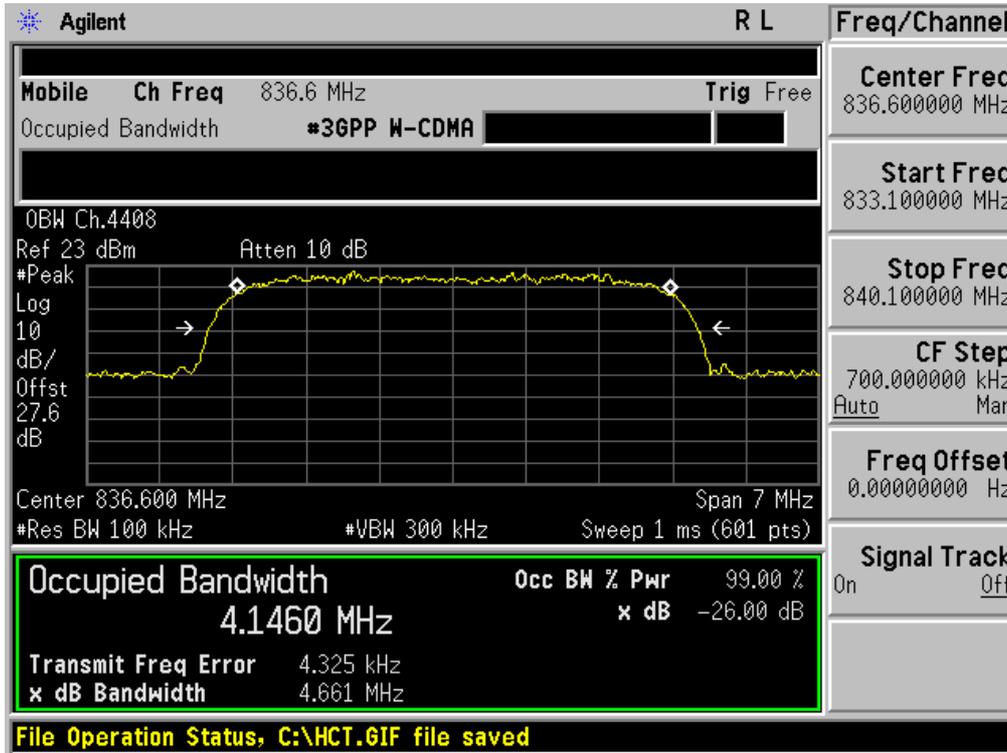


■ WCDMA850MODE (4233 CH.) Occupied Bandwidth

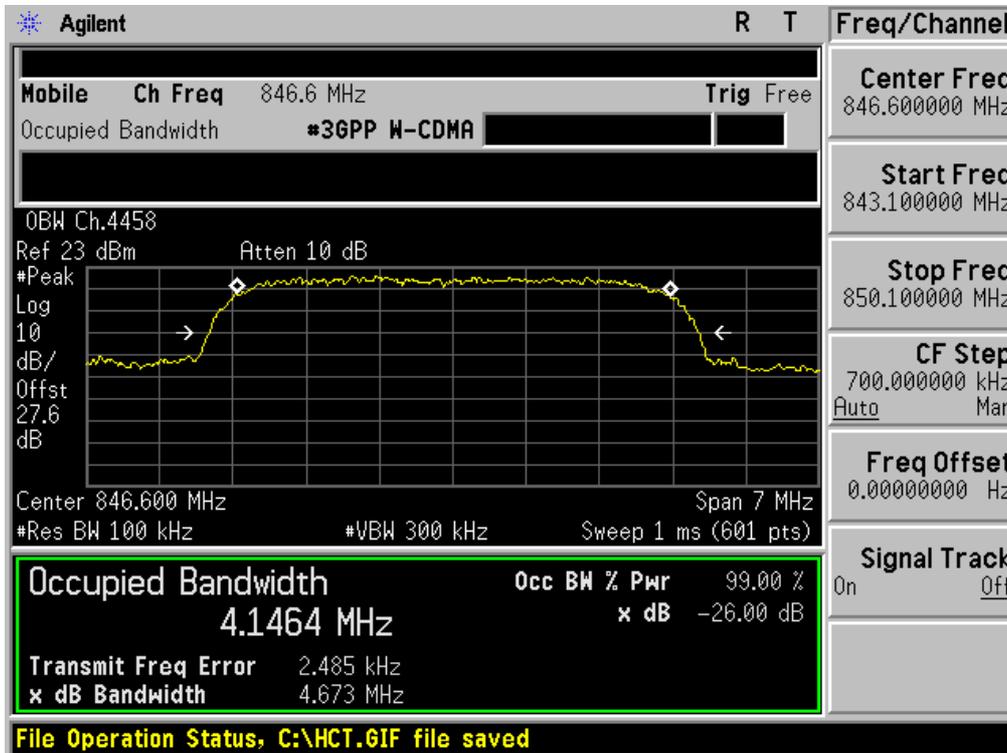


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

■ WCDMA1900 MODE (9262 CH.) Occupied Bandwidth

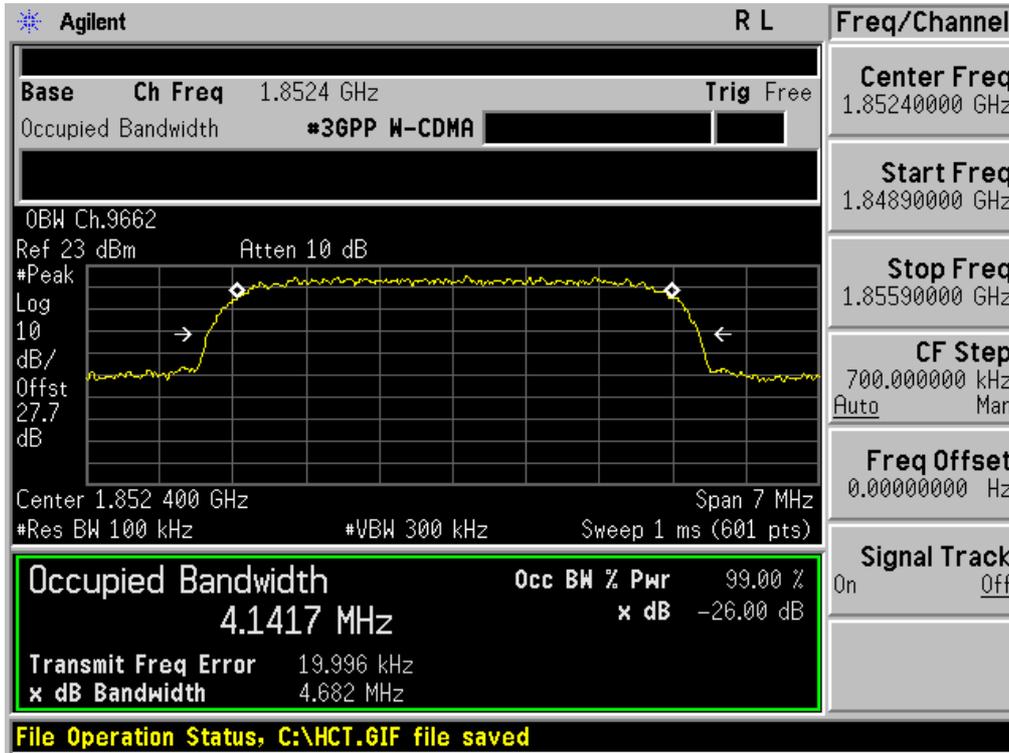


■ WCDMA1900 MODE (9400 CH.) Occupied Bandwidth

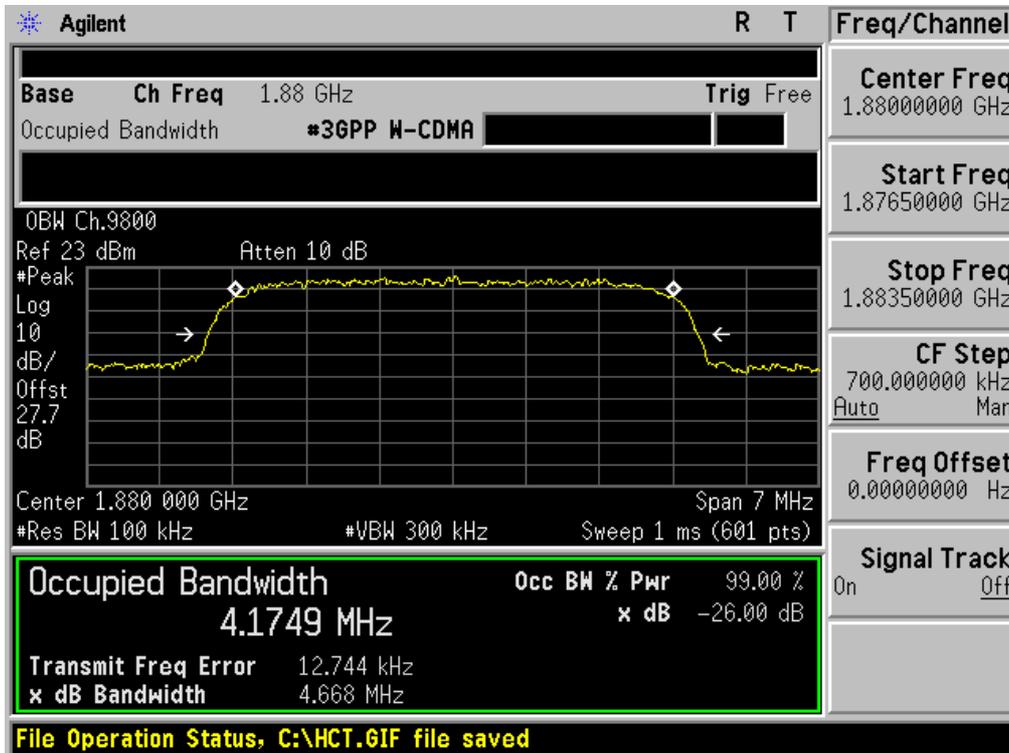


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

■ WCDMA1900 MODE (9538 CH.) Occupied Bandwidth

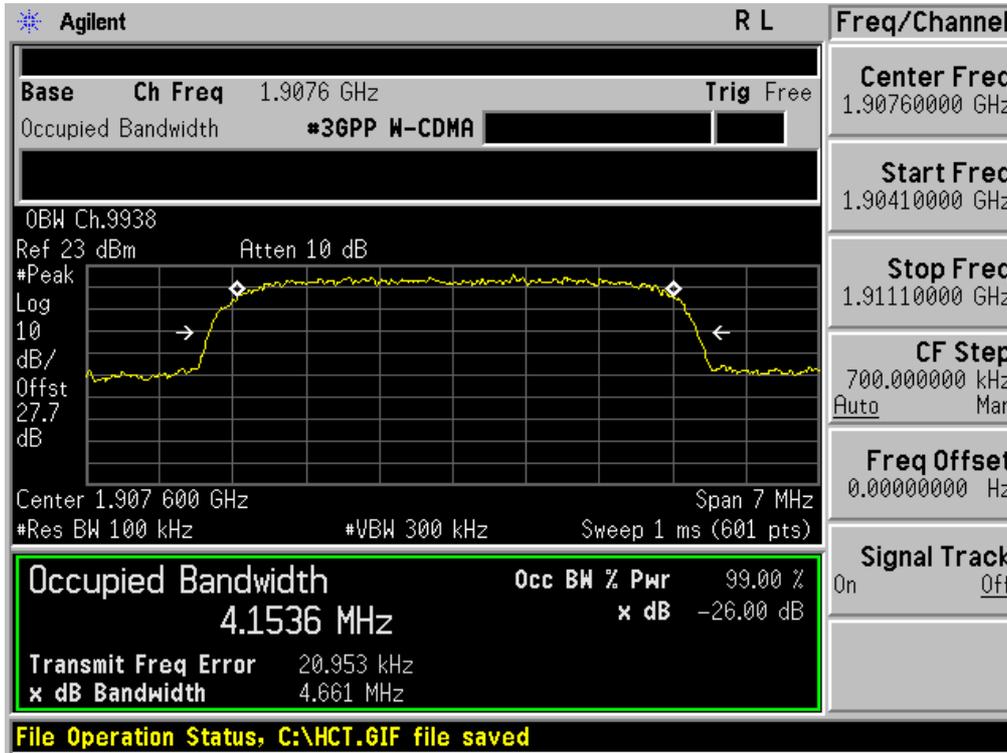


■ WCDMA1900 MODE (9400 CH.) Peak-to-Average Ratio

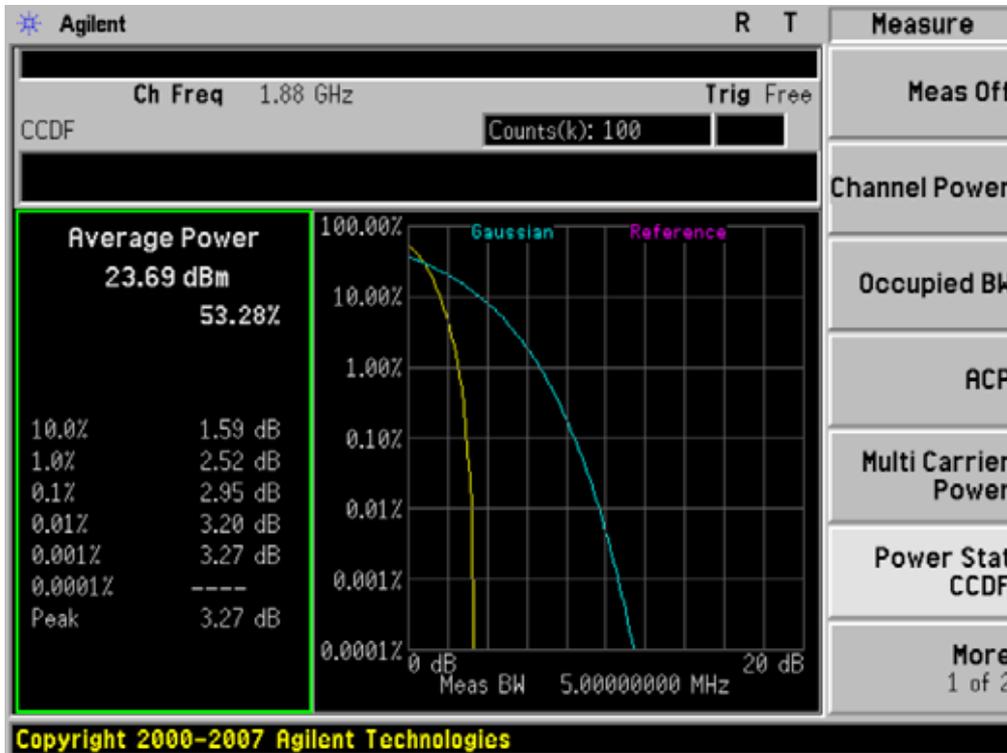


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

■ GSM850 MODE (128 CH.) Block Edge 1

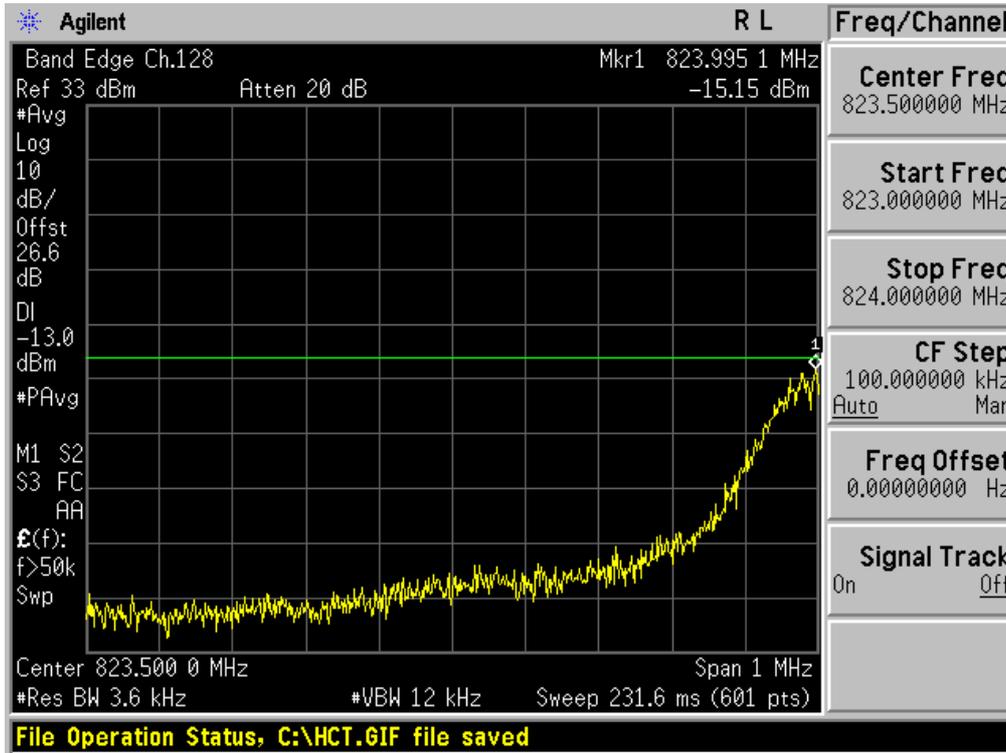


■ GSM850 MODE (128 CH.) Block Edge 2

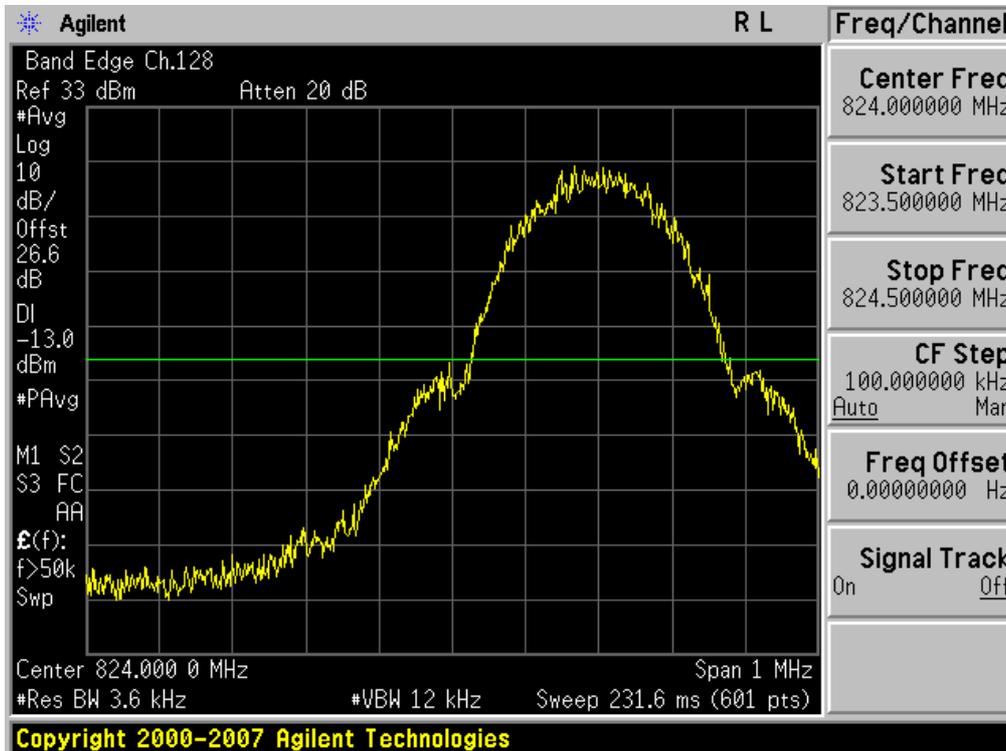


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

■ GSM850 MODE (251 CH.) Block Edge 1

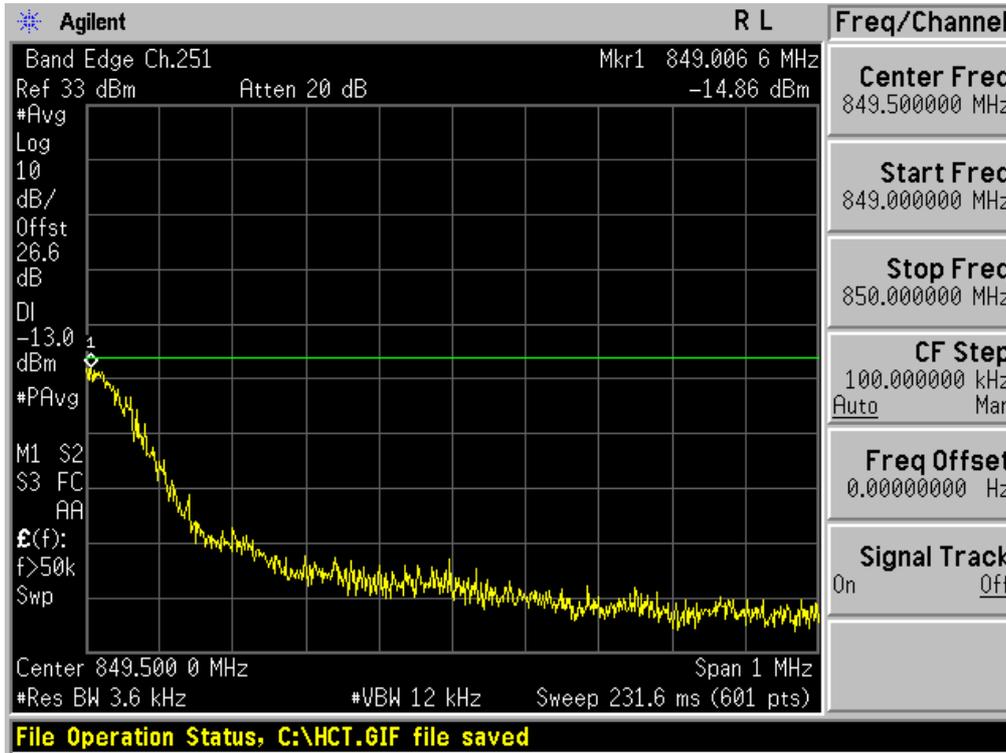


■ GSM850 MODE (251 CH.) Block Edge 2

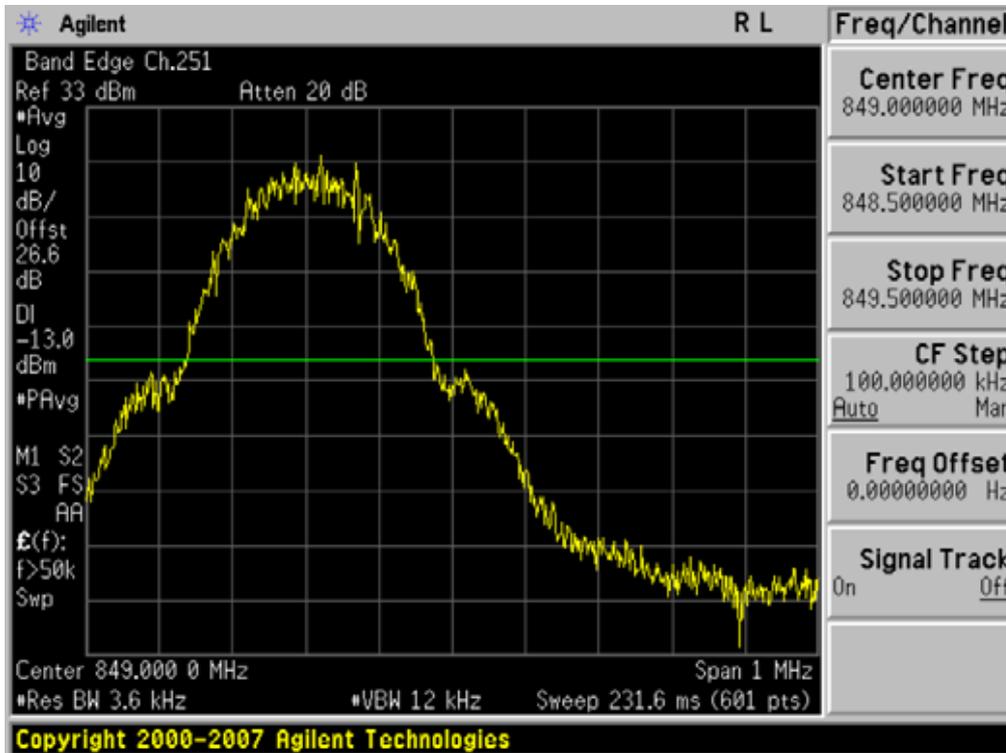


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

■ EDGE MODE (128 CH.) Block Edge 1

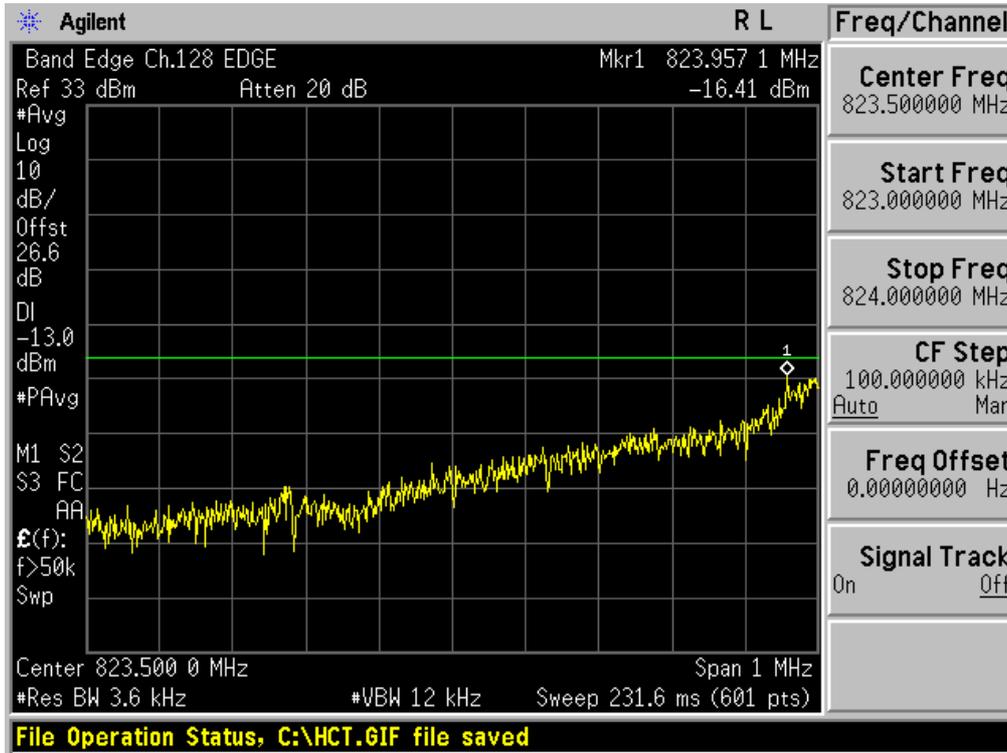


■ EDGE MODE (128 CH.) Block Edge 2

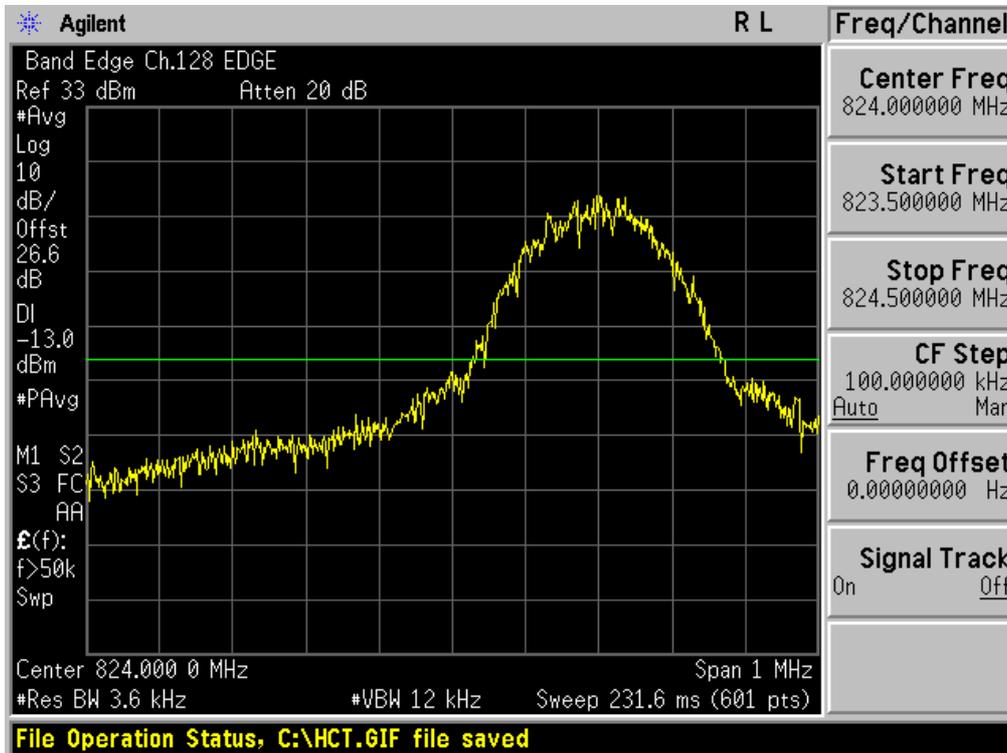


FCC CERTIFICATION REPORT

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P

■ EDGE MODE (251 CH.) Block Edge 1

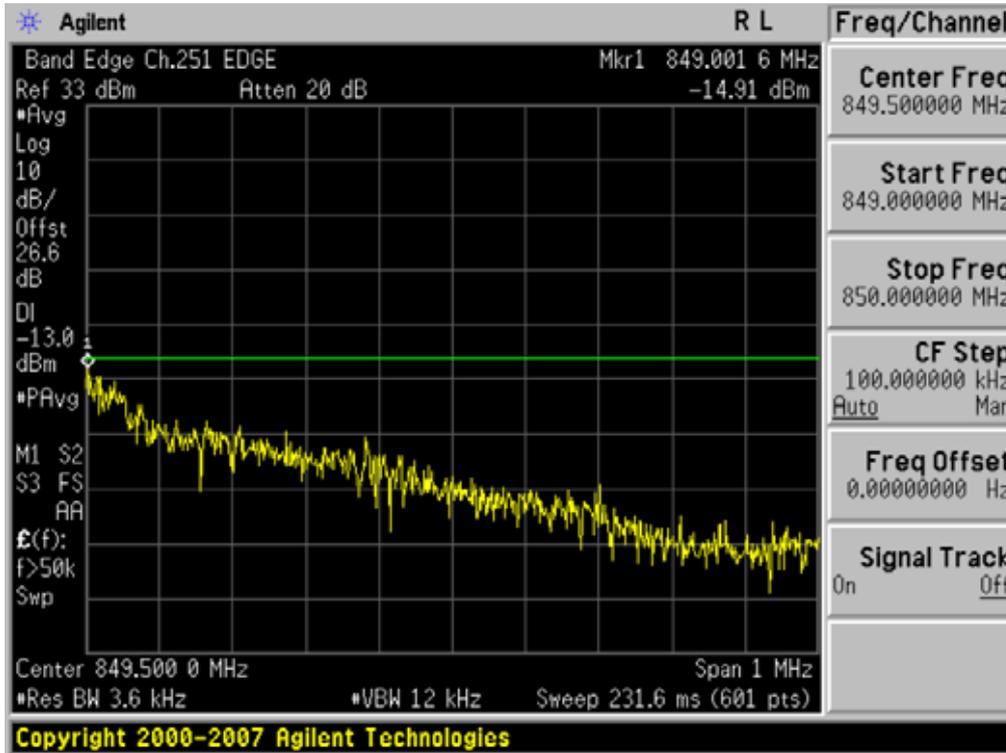


■ EDGE MODE (251 CH.) Block Edge 2

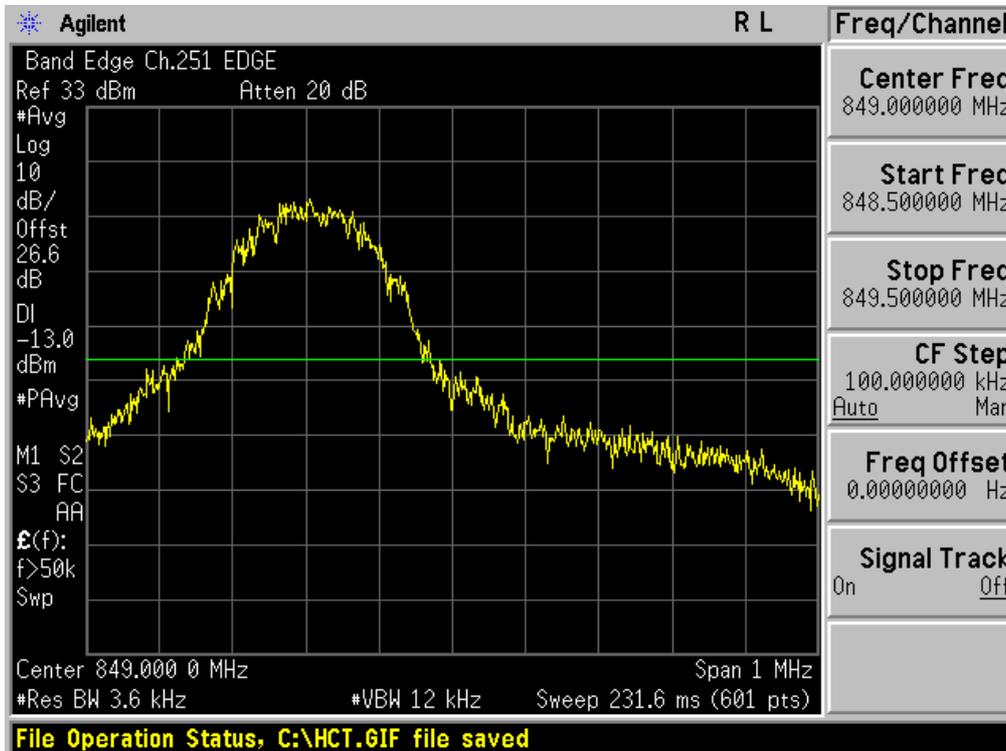


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

■ GSM1900 MODE (512 CH.) Block Edge 1

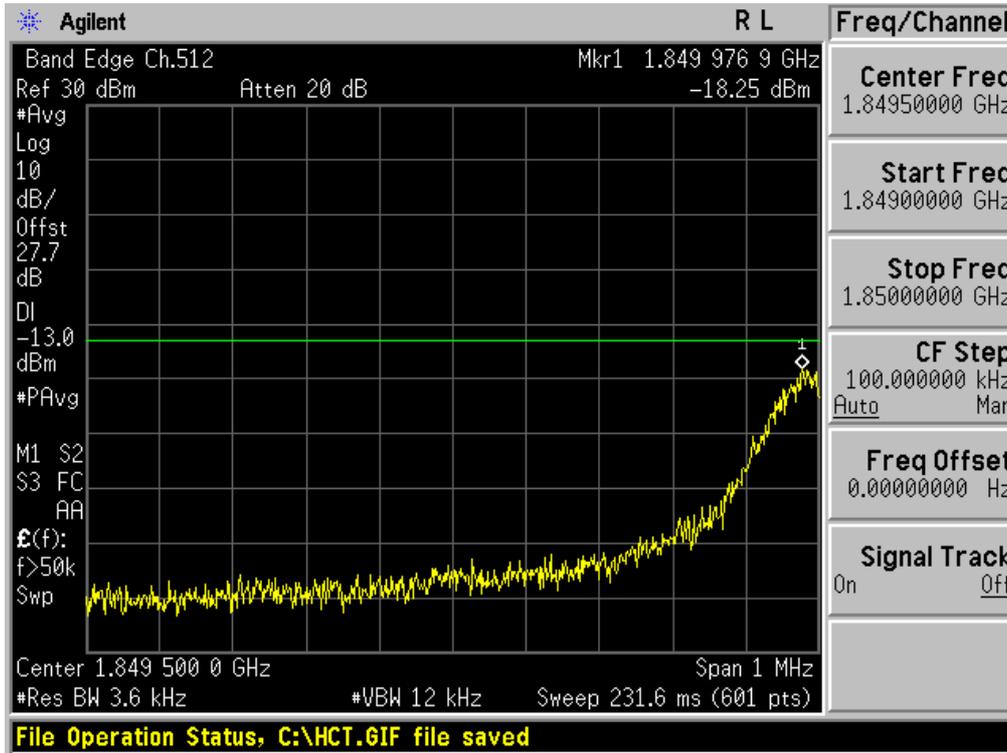


■ GSM1900 MODE (512 CH.) Block Edge 2

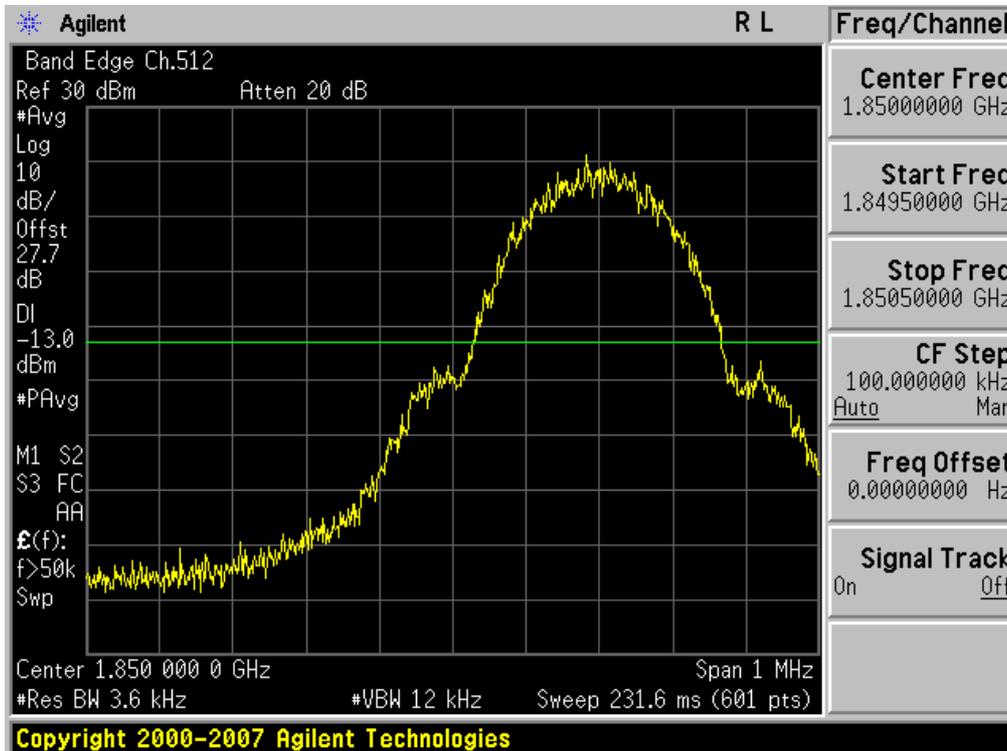


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

■ GSM1900 MODE (810 CH.) Block Edge 1

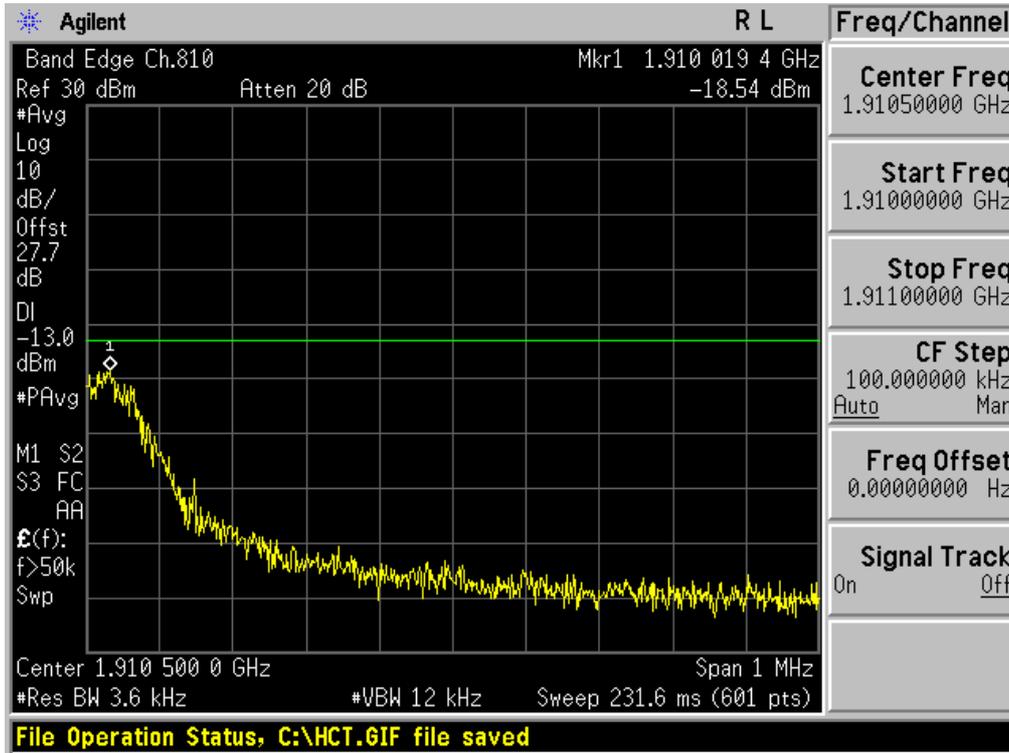


■ GSM1900 MODE (810 CH.) Block Edge 2

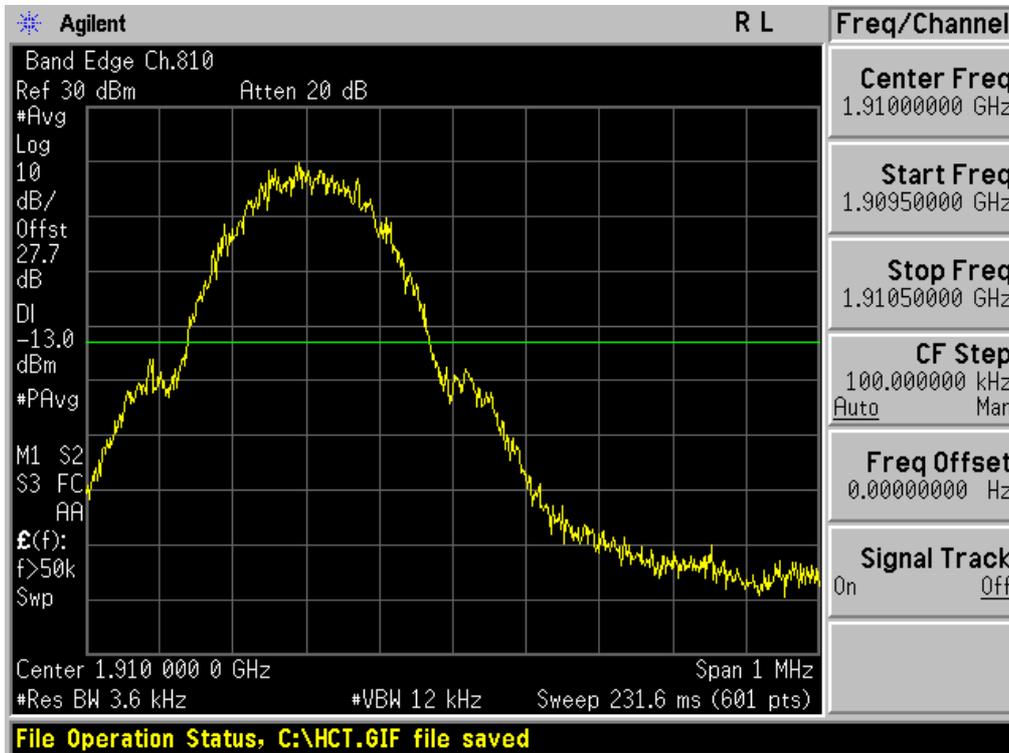


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

■ EDGE MODE (512 CH.) Block Edge 1

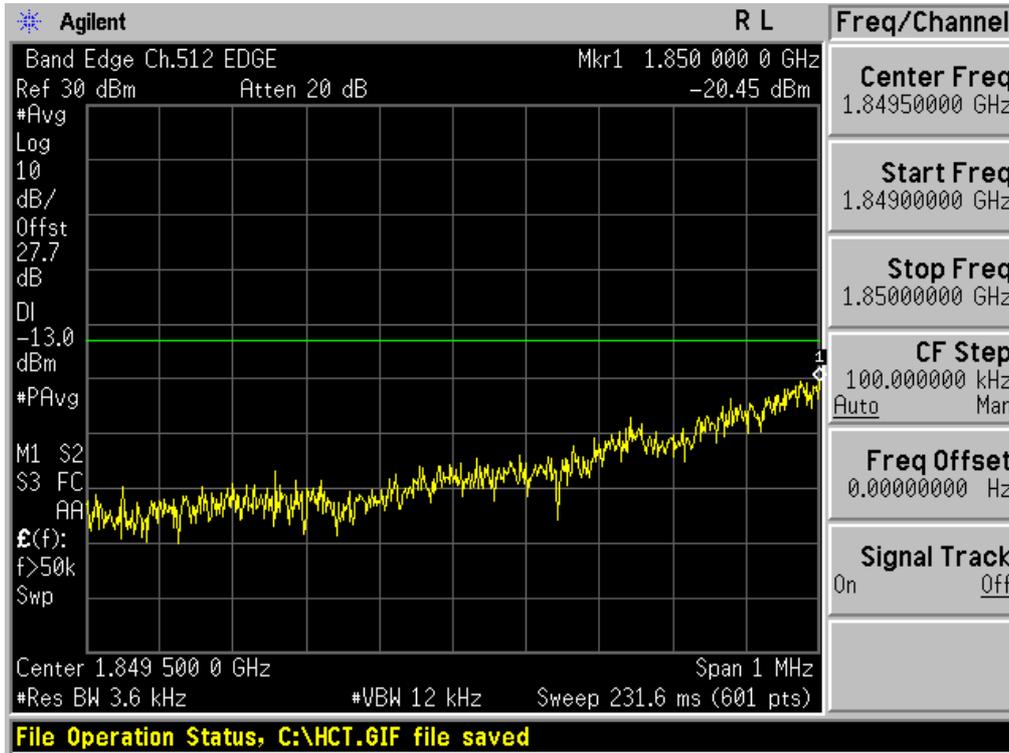


■ EDGE MODE (512 CH.) Block Edge 2

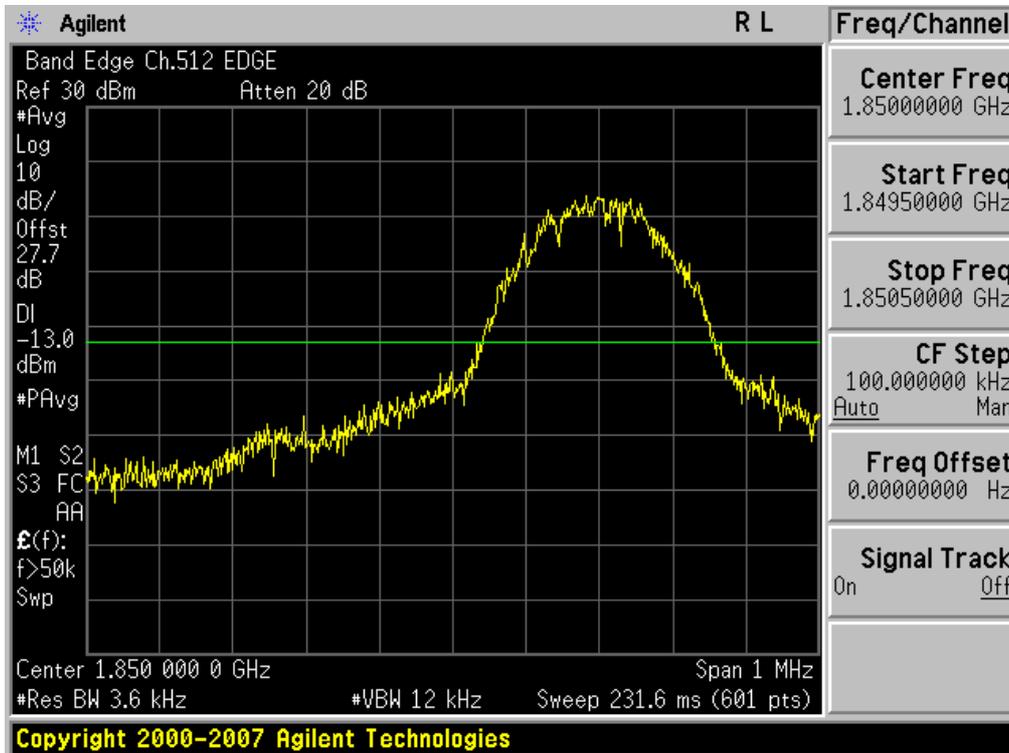


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

■ EDGE MODE (810 CH.) Block Edge 1

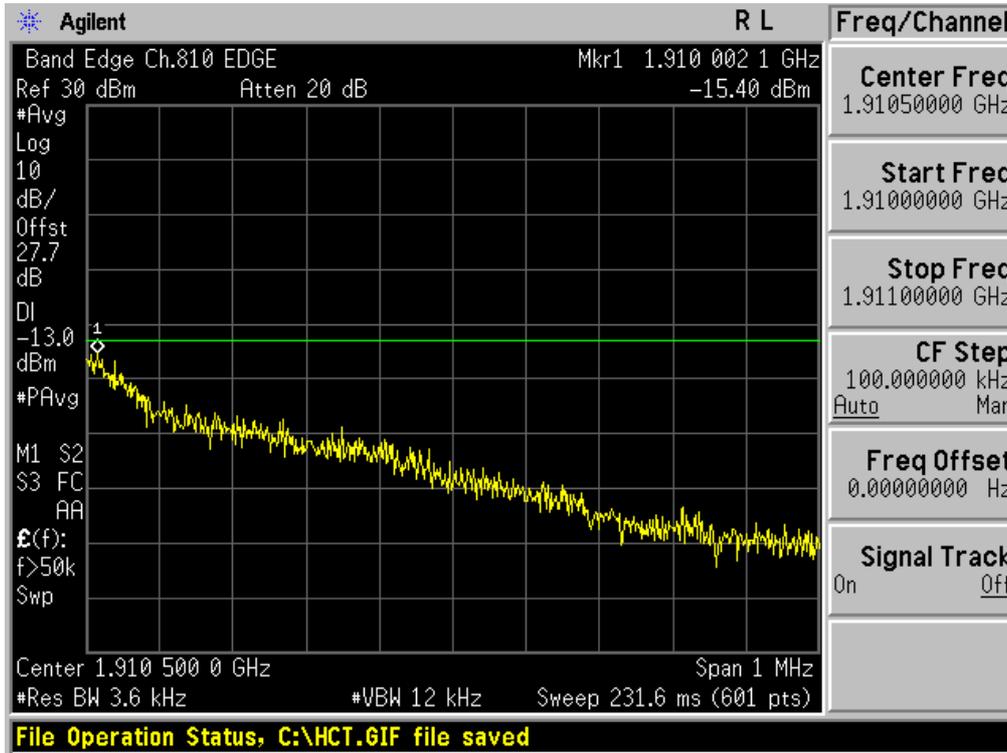


■ EDGE MODE (810 CH.) Block Edge 2

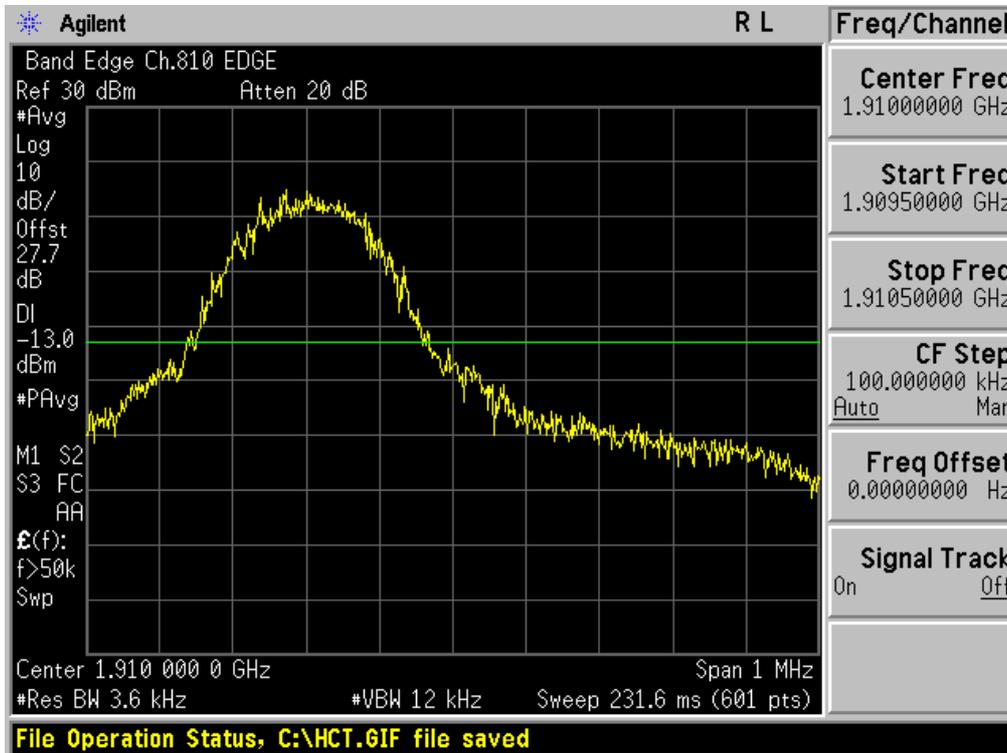


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

■ WCDMA850 MODE (4132 CH.) Block Edge

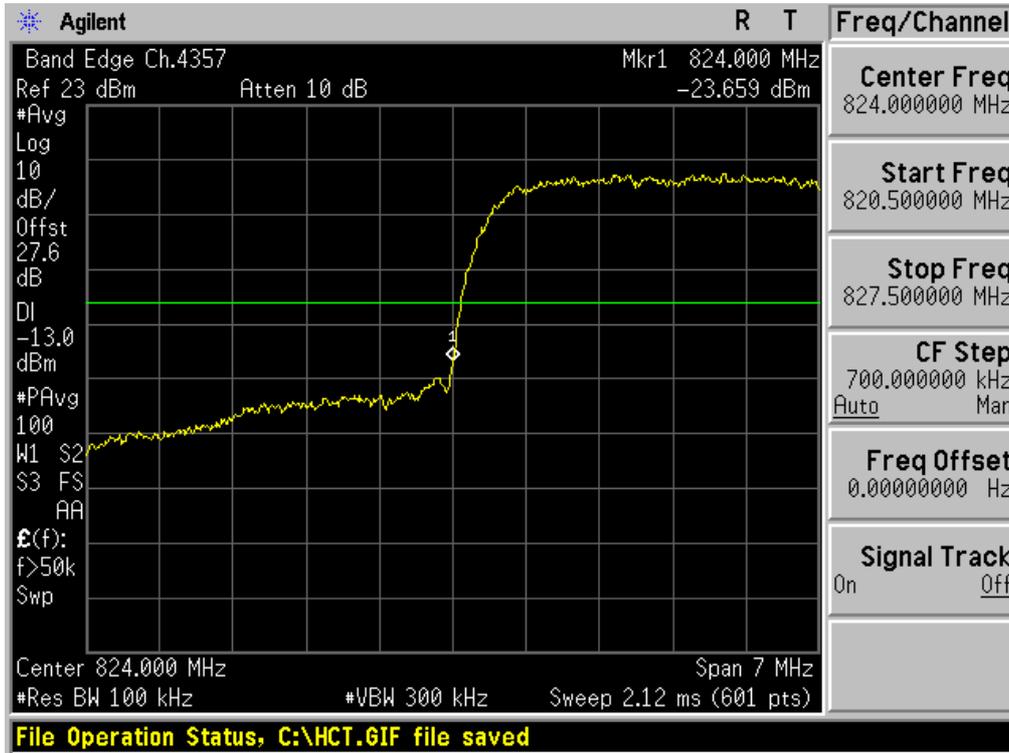


■ WCDMA850MODE (4233 CH.) Block Edge

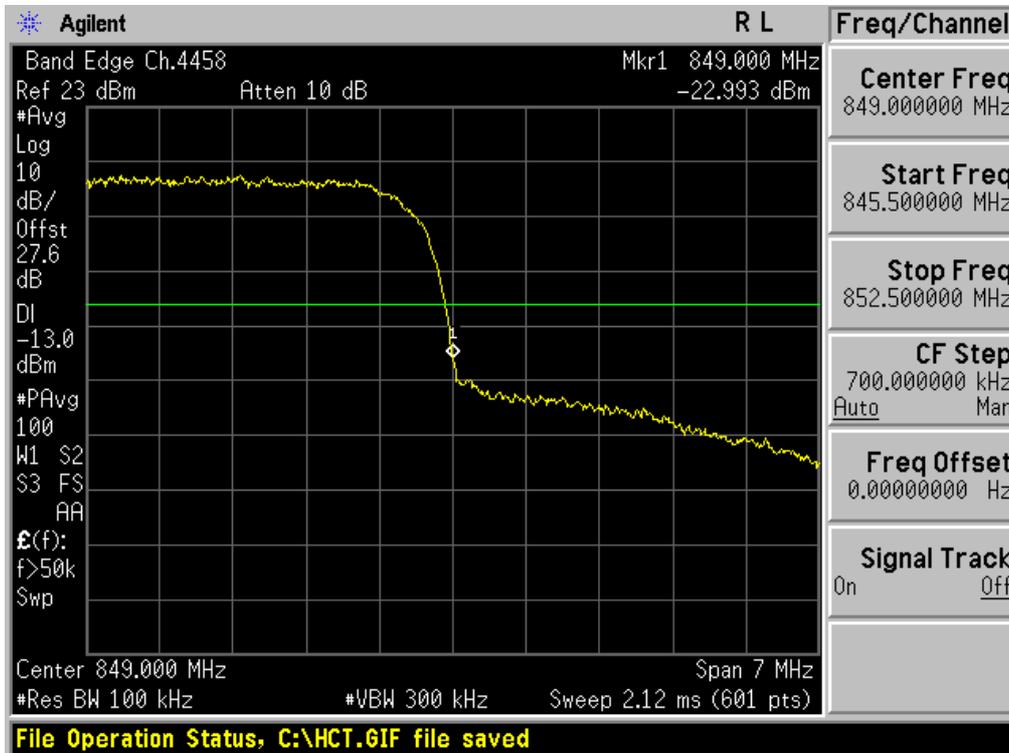


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

■ WCDMA850 MODE (4132 CH.) – 4 MHz Span

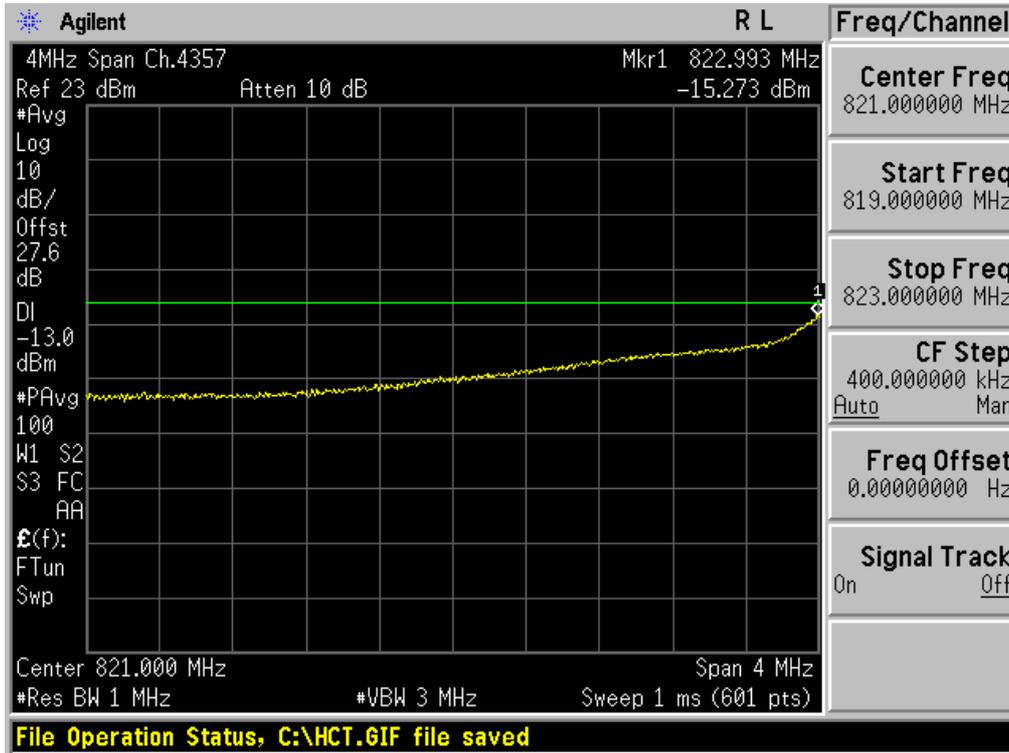


■ WCDMA850MODE (4233 CH.) – 4 MHz Span

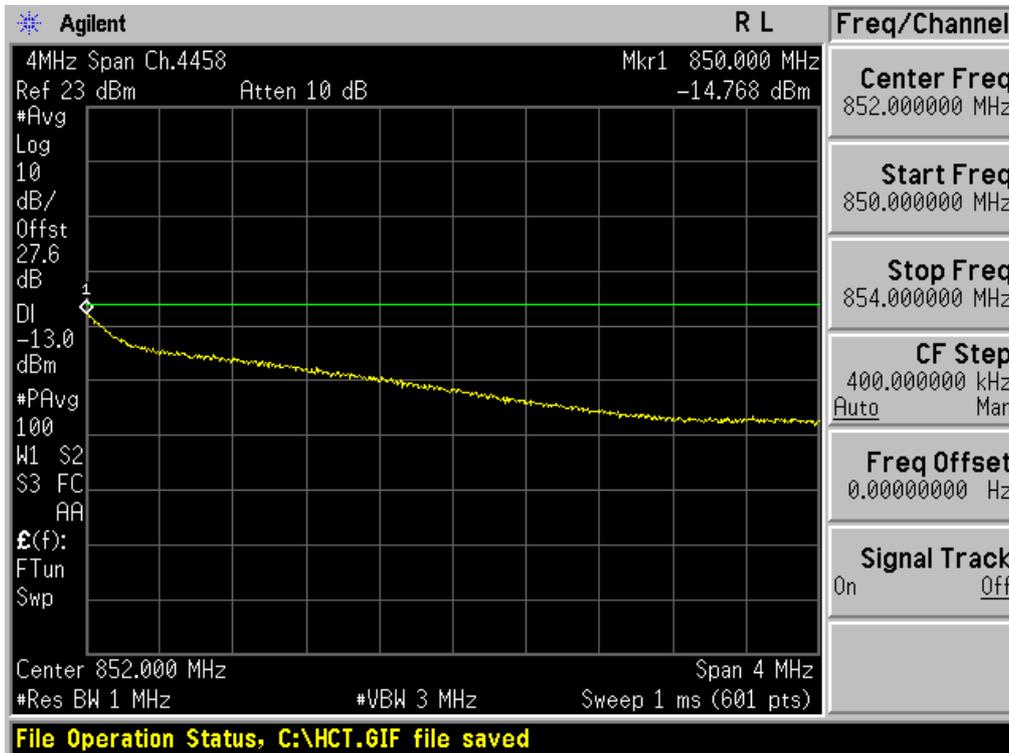


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

■ WCDMA1900 MODE (9262 CH.) Block Edge

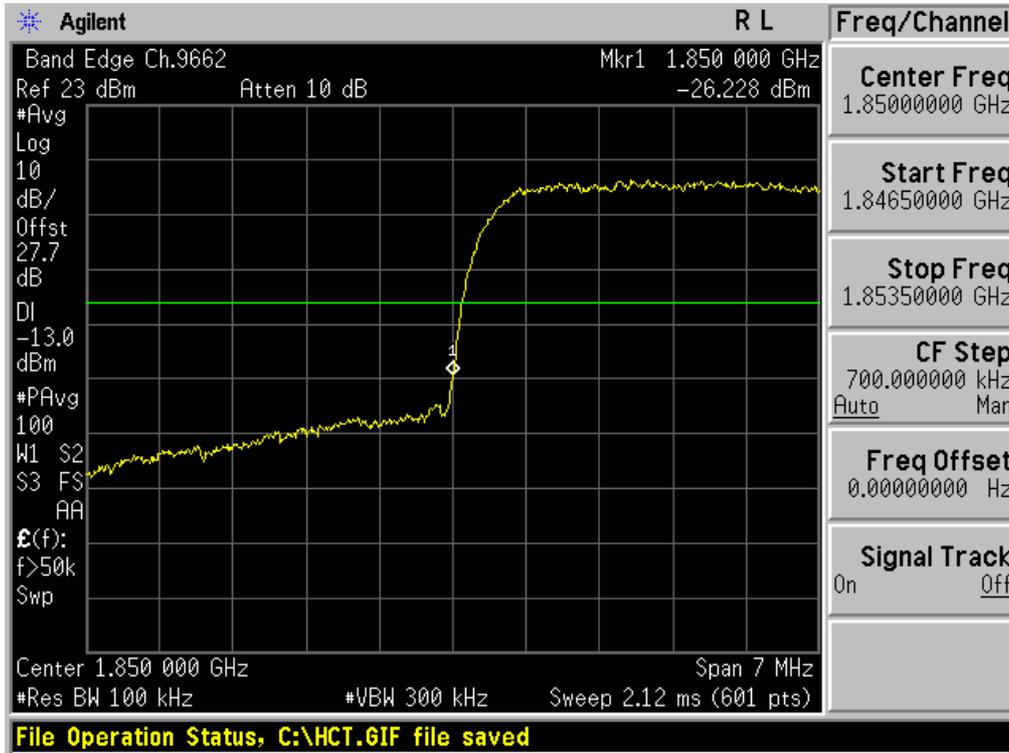

■ WCDMA1900 MODE (9538 CH.) Block Edge

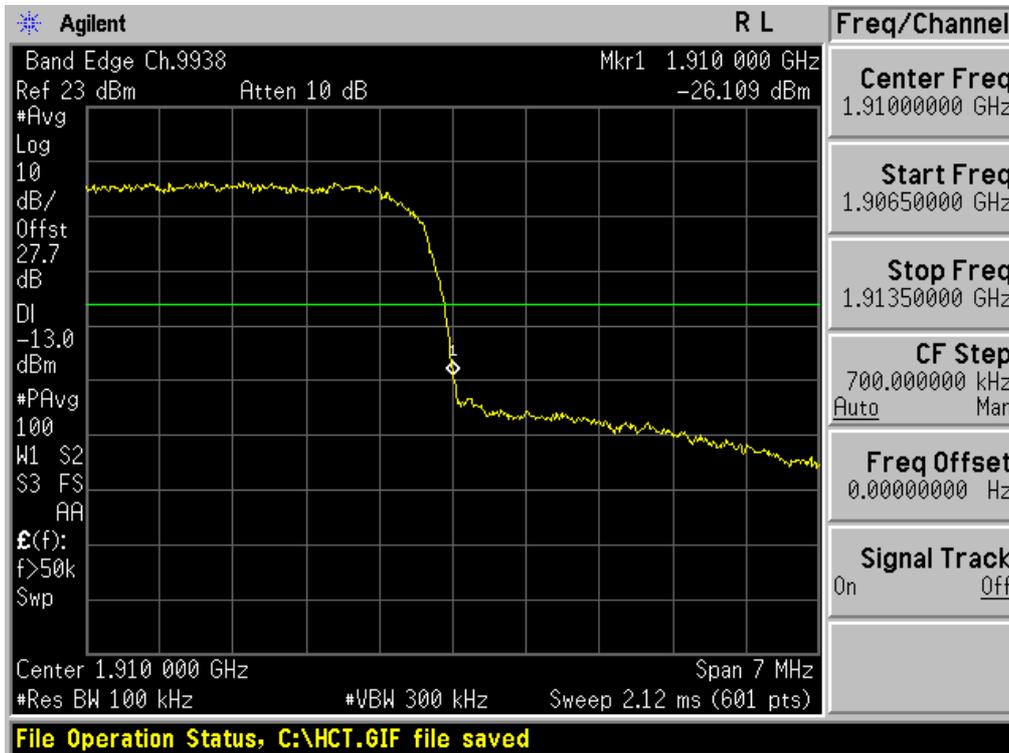


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

■ WCDMA1900 MODE (9262 CH.) – 4 MHz Span




■ WCDMA1900 MODE (9538 CH.) – 4 MHz Span

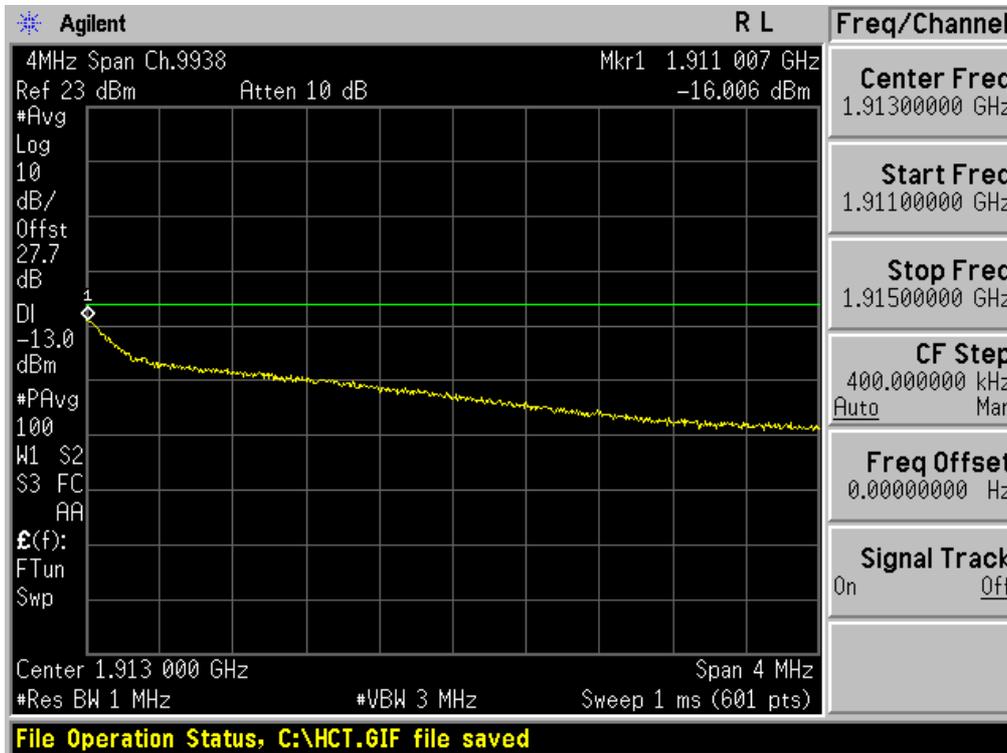


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

■ GSM850 MODE (128 CH.) Conducted Spurious Emissions1

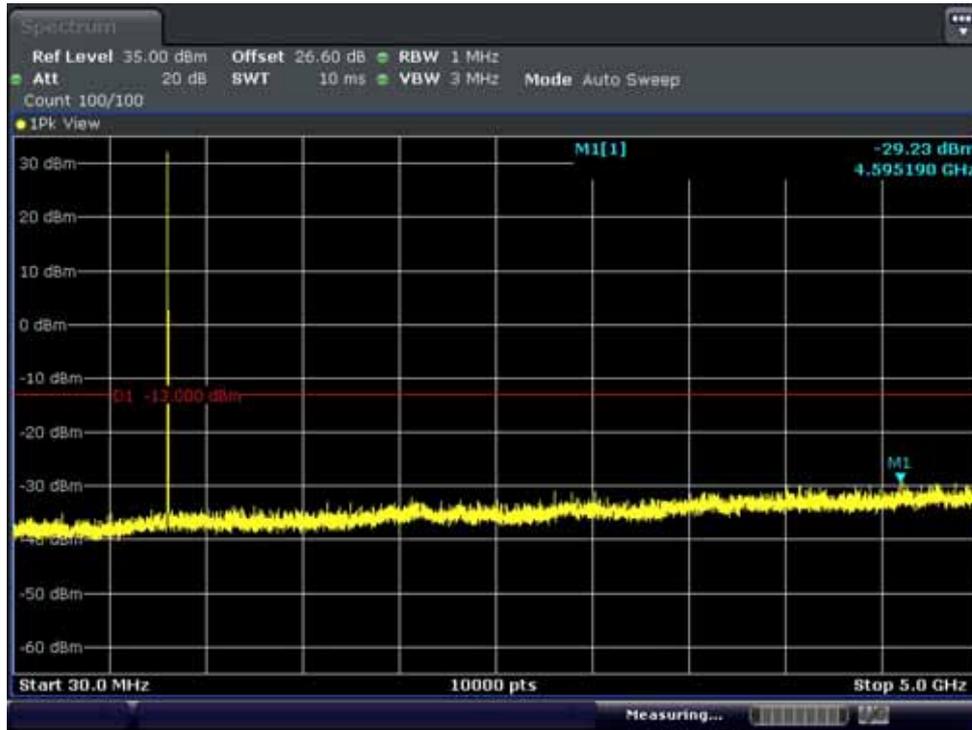


■ GSM850 MODE (128 CH.) Conducted Spurious Emissions2

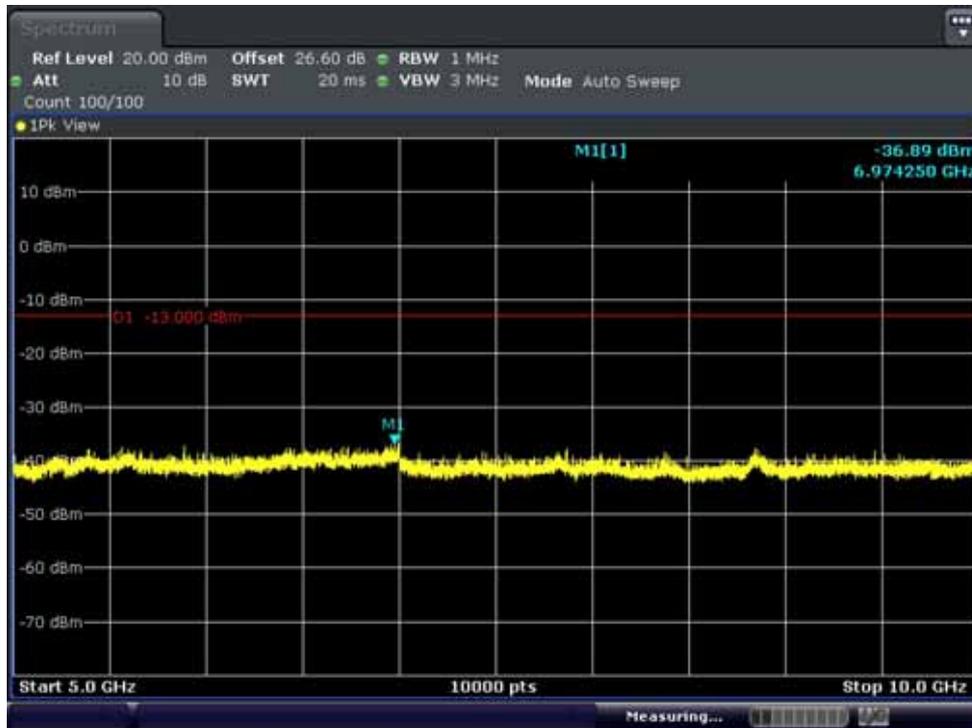

FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

■ GSM850 MODE (190 CH.) Conducted Spurious Emissions1

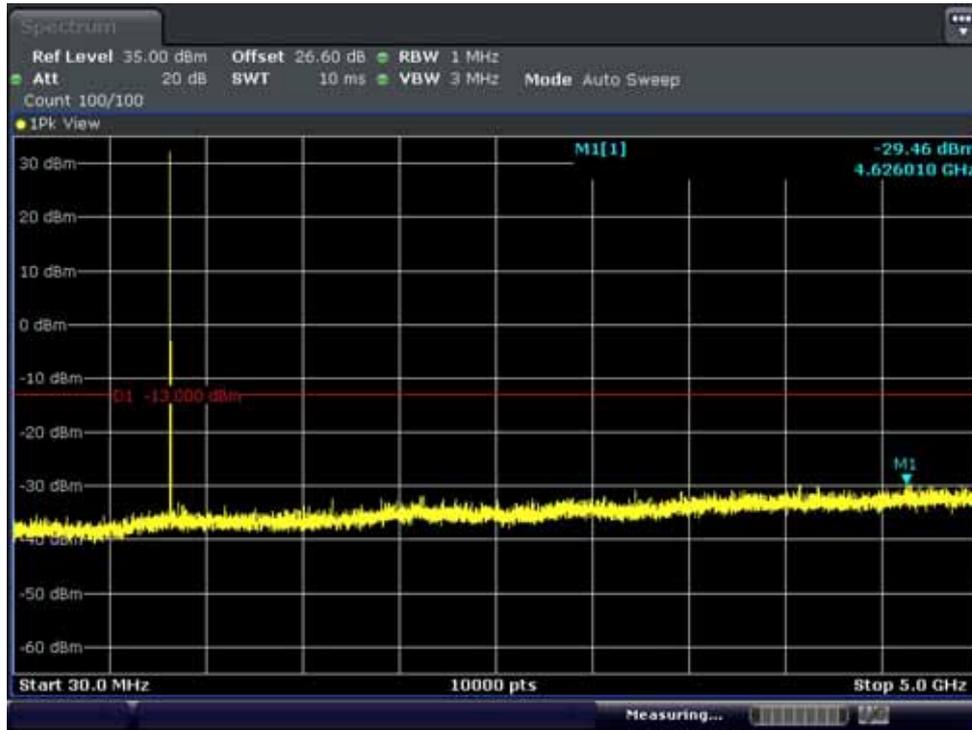


■ GSM850 MODE (190 CH.) Conducted Spurious Emissions2




FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

■ GSM850 MODE (251 CH.) Conducted Spurious Emissions1

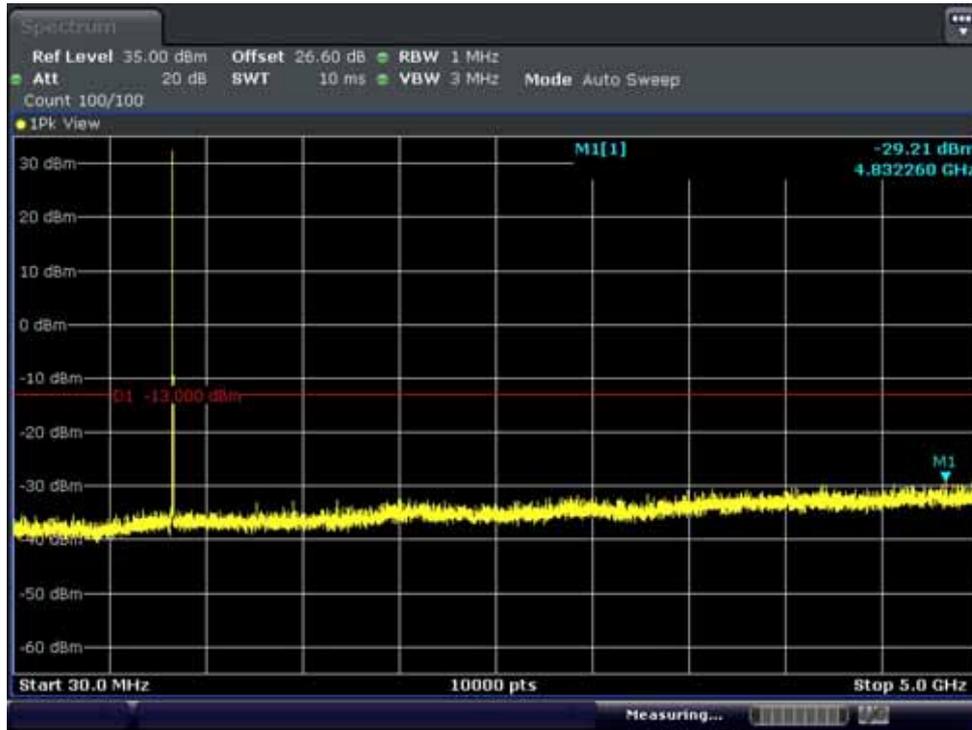


■ GSM850 MODE (251 CH.) Conducted Spurious Emissions2

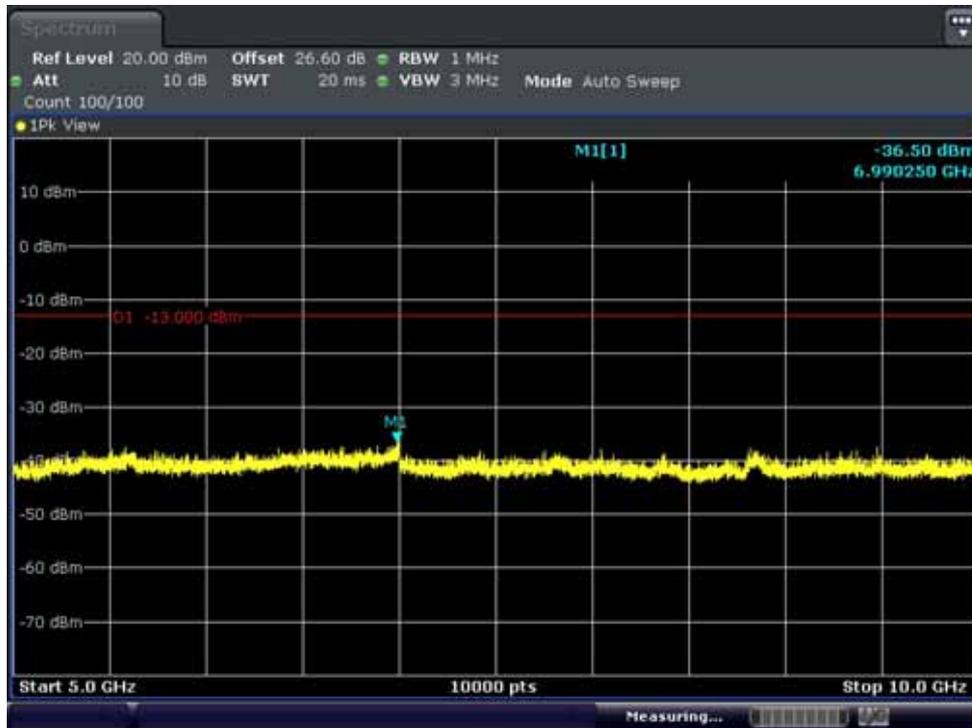

FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions1

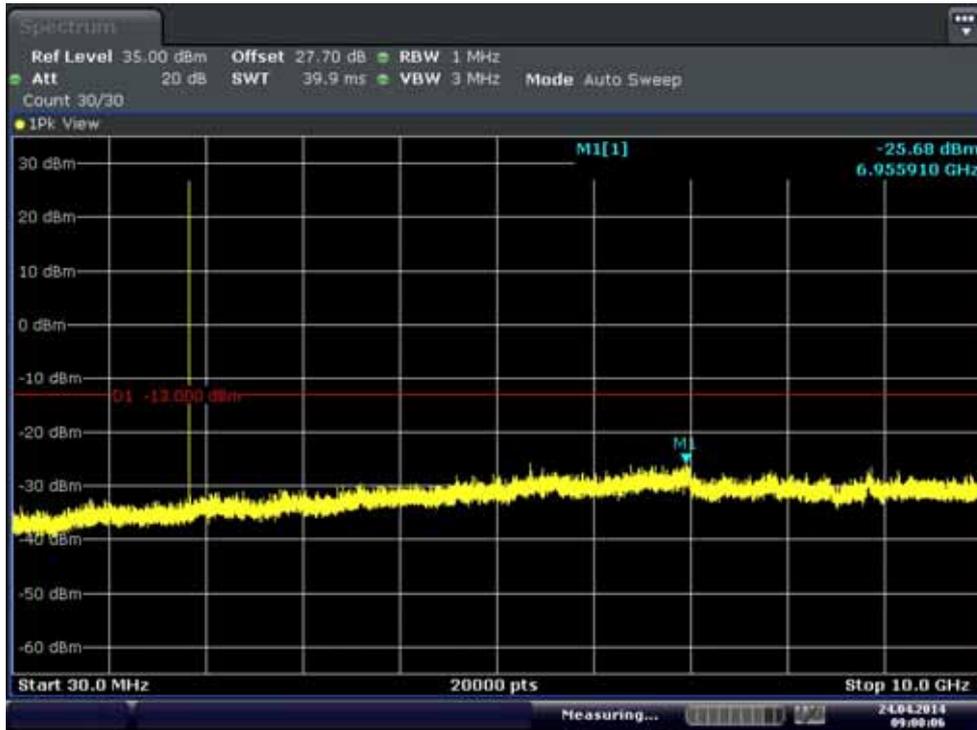

■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions2



FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

■ GSM1900 MODE (661 CH) Conducted Spurious Emissions1



■ GSM1900 MODE (661 CH.) Conducted Spurious Emissions2



FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

■ GSM1900 MODE (810 CH.) Conducted Spurious Emissions1




■ GSM1900 MODE (810 CH.) Conducted Spurious Emissions2




FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---

■ WCDMA850 MODE (4132 CH.) Conducted Spurious Emissions1

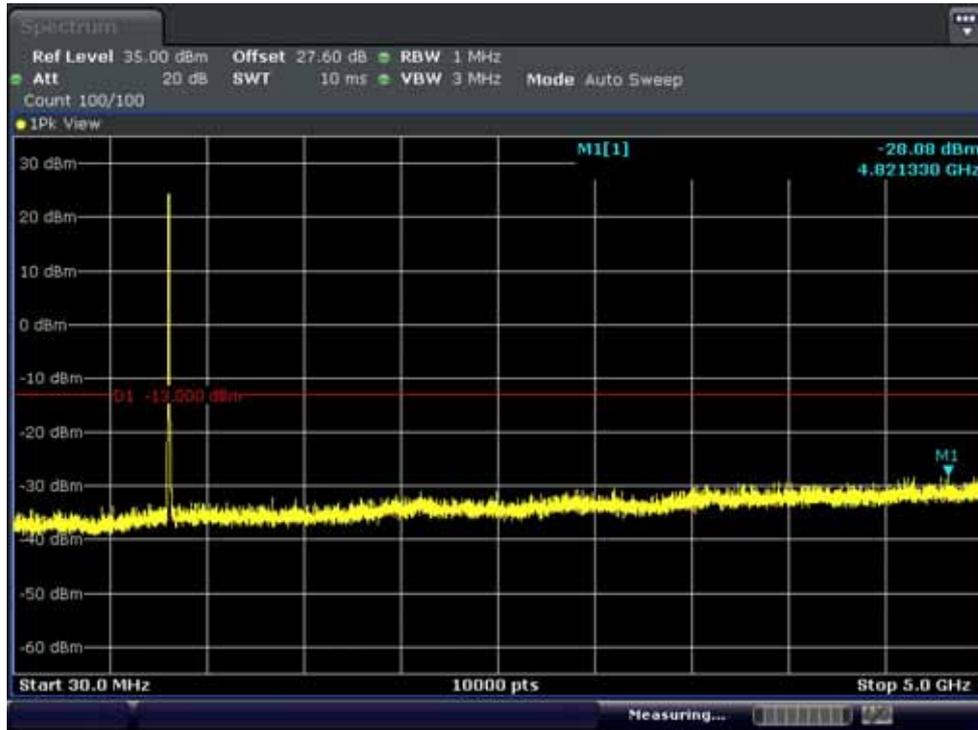


■ WCDMA850 MODE (4132 CH.) Conducted Spurious Emissions2

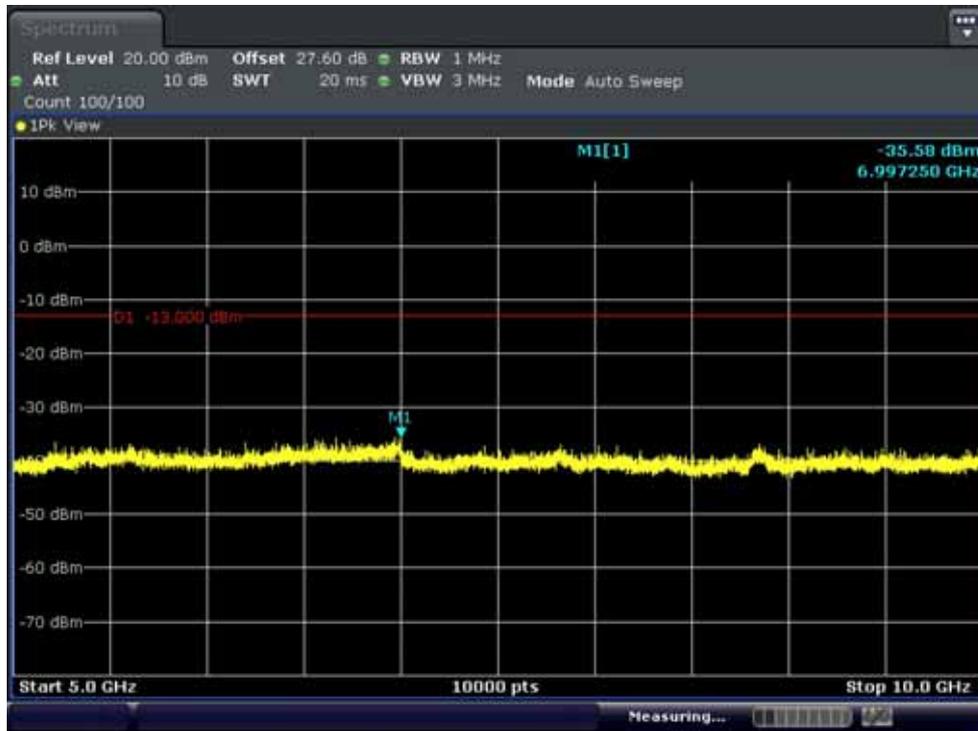


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

■ WCDMA850 MODE (4183 CH.) Conducted Spurious Emissions1

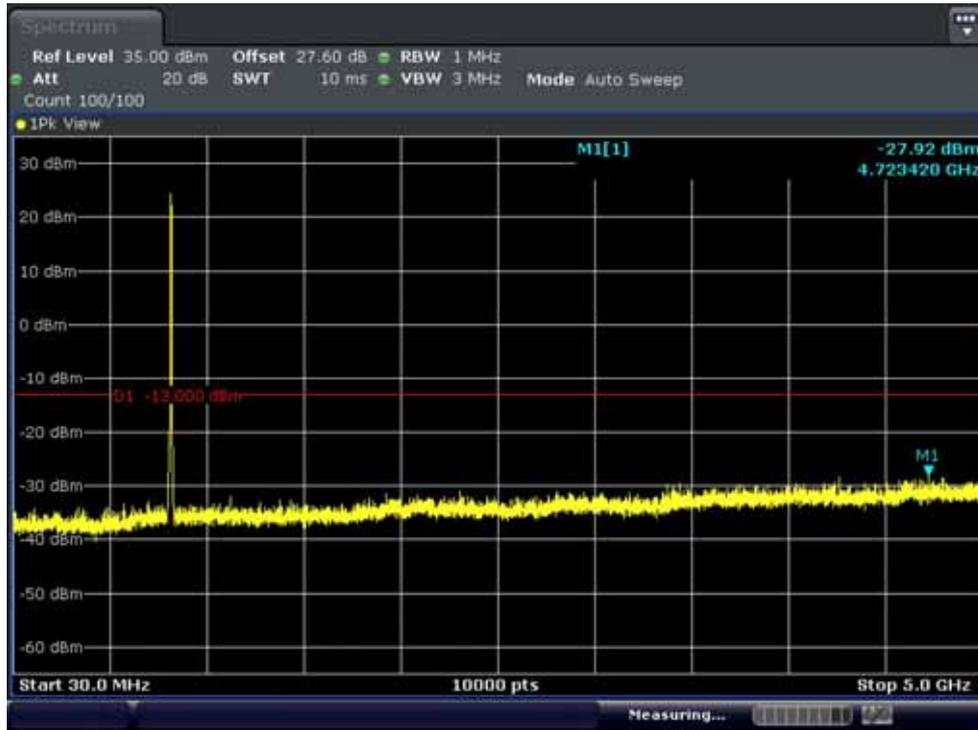


■ WCDMA850 MODE (4183 CH.) Conducted Spurious Emissions2

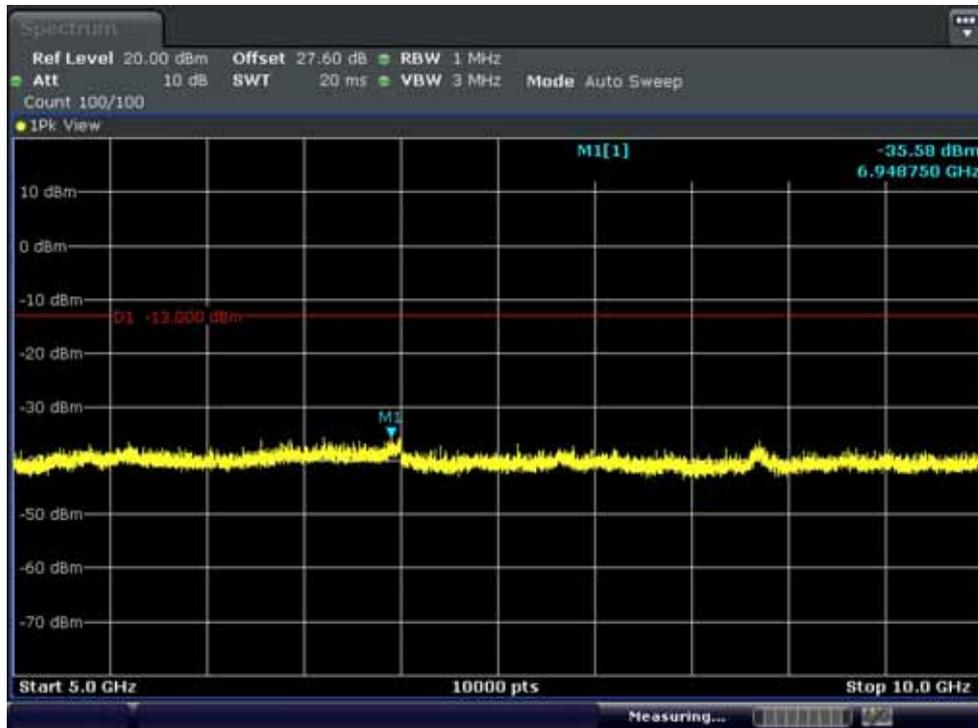


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

■ WCDMA850MODE (4233 CH.) Conducted Spurious Emissions1

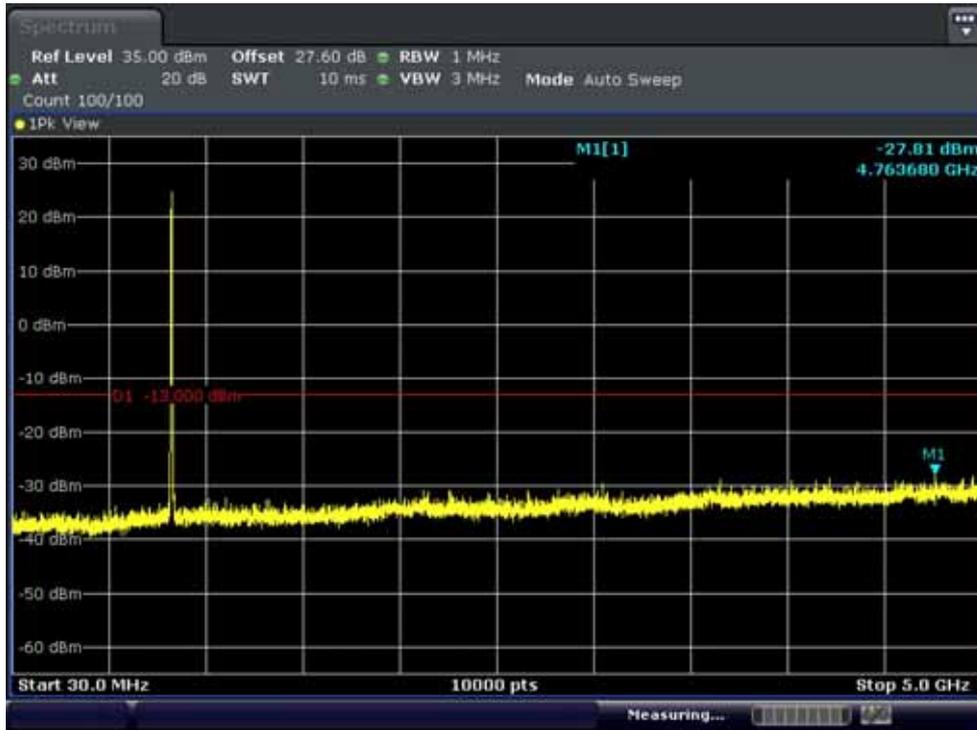


■ WCDMA850MODE (4233 CH.) Conducted Spurious Emissions2

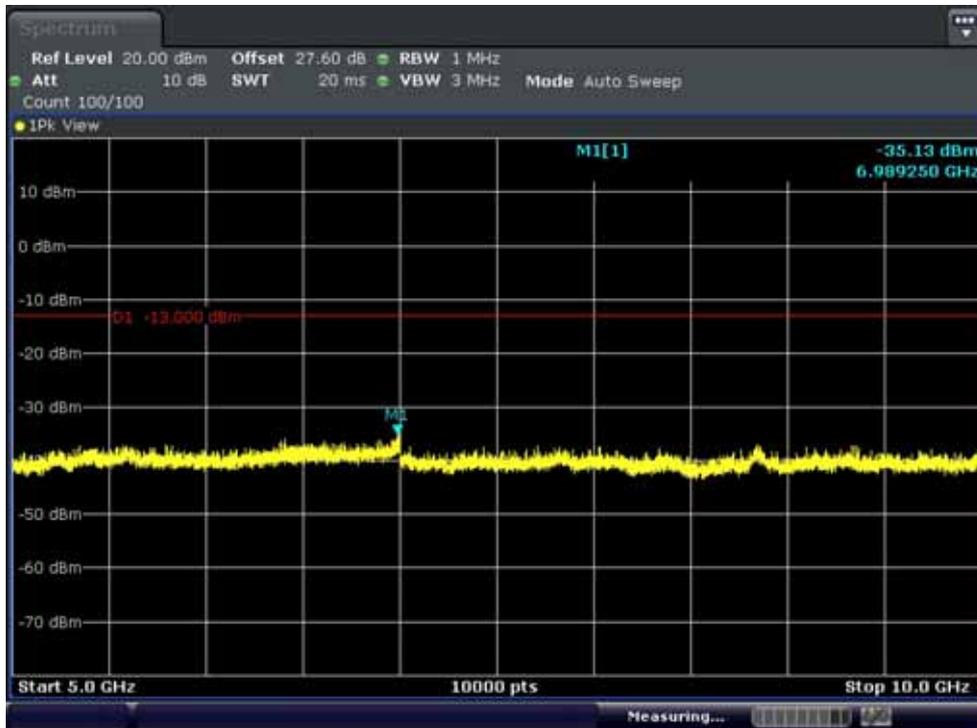

FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

■ WCDMA1900 MODE (9262 CH.) Conducted Spurious Emissions1

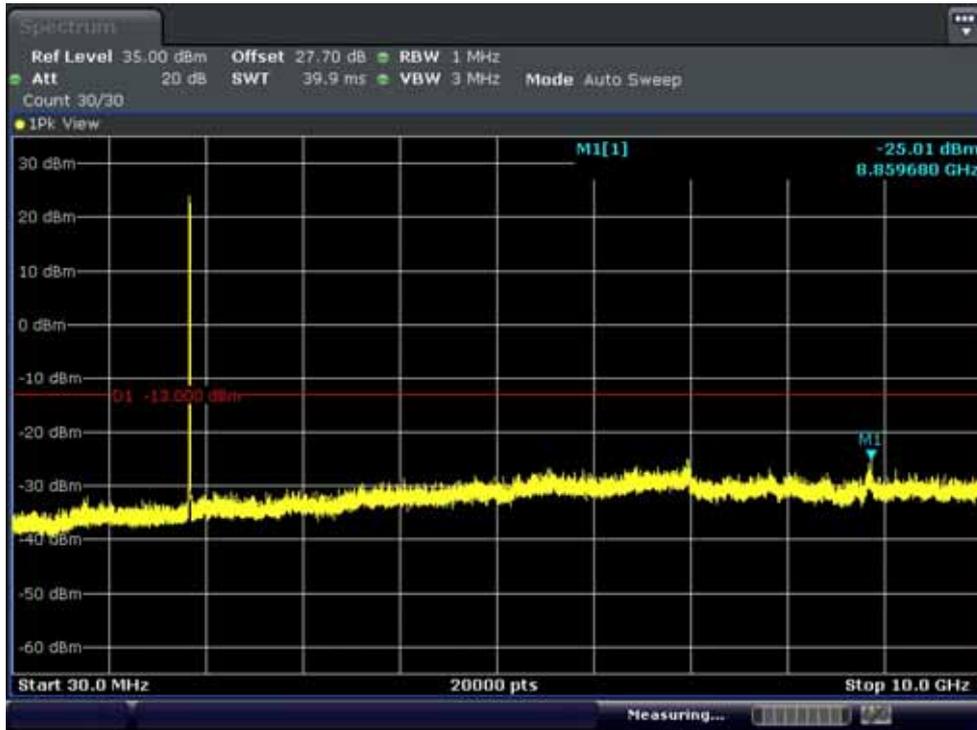

■ WCDMA1900 MODE (9262 CH.) Conducted Spurious Emissions2



FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

■ WCDMA1900 MODE (9400 CH.) Conducted Spurious Emissions1




■ WCDMA1900 MODE (9400 CH.) Conducted Spurious Emissions2




FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

■ WCDMA1900 MODE (9538 CH.) Conducted Spurious Emissions1

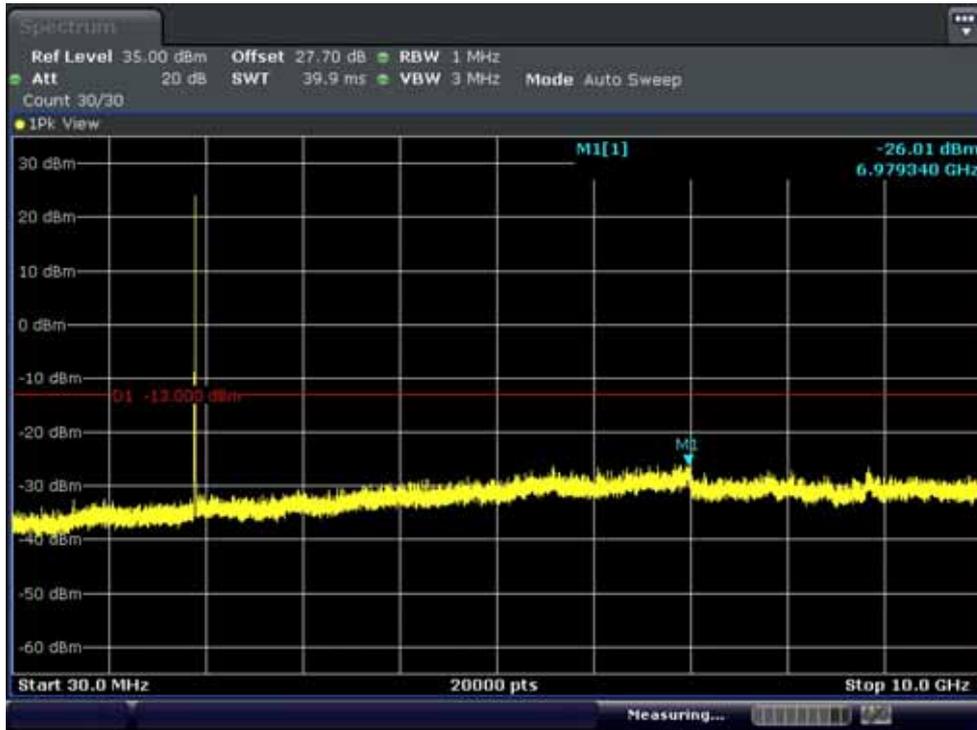

■ WCDMA1900 MODE (9538 CH.) Conducted Spurious Emissions2

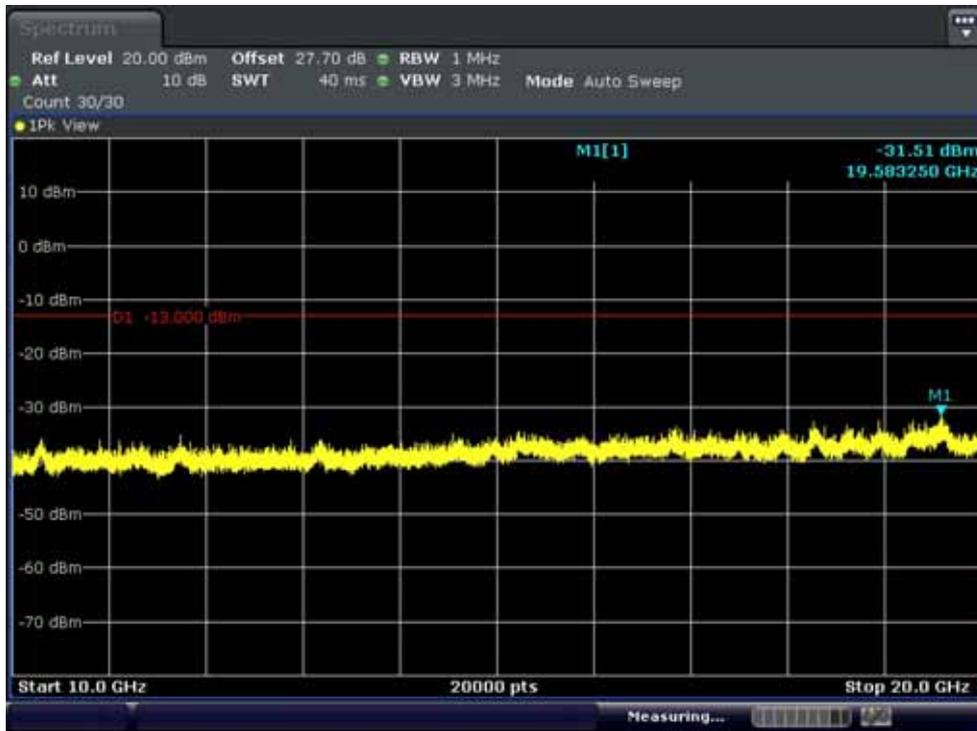

FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F014-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---