



HCT CO., LTD.

CERTIFICATE OF COMPLIANCE FCC Certification

Applicant Name: LG Electronics MobileComm U.S.A., Inc.	Date of Issue: May 30, 2014
Address: 1000 Sylvan Avenue, Englewood Cliffs NJ 07632	Test Site/Location: HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea
	Report No.: HCT-R-1405-F013-2
	HCT FRN: 0005866421

FCC ID:	ZNFD855P
APPLICANT:	LG Electronics MobileComm U.S.A., Inc.

FCC Model(s):	LG-D855P
Additional FCC Model(s):	LG-D855p, D855P, D855p, LGD855P, LGD855p, LG-D855AR, LG-D855ar, LGD855AR, LGD855ar, D855AR, D855ar
EUT Type:	Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC
FCC Classification:	Licensed Portable Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§2 , §27
Tx Frequency:	2502.5 MHz – 2567.5 MHz (LTE – Band 7): 5 MHz 2505.0 MHz – 2565.0 MHz (LTE – Band 7): 10 MHz 2507.5 MHz – 2562.5 MHz (LTE – Band 7): 15 MHz 2510.0 MHz – 2560.0 MHz (LTE – Band 7): 20 MHz
Max. RF Output Power Normal battery Charger:	Band 7 (5 MHz) : 0.141 W (QPSK) (21.49 dBm) 0.143 W (16-QAM) (21.55 dBm) Band 7 (10 MHz) : 0.147 W (QPSK) (21.66 dBm) 0.175 W (16-QAM) (22.42 dBm) Band 7 (15 MHz) : 0.123 W (QPSK) (20.90 dBm) 0.137 W (16-QAM) (21.38 dBm) Band 7 (20 MHz) : 0.108 W (QPSK) (20.35 dBm) 0.135 W (16-QAM) (21.29 dBm)
Max. RF Output Power Wireless battery Charger:	Band 7 (5 MHz) : 0.115 W (QPSK) (20.60 dBm) 0.126 W (16-QAM) (21.02 dBm) Band 7 (10 MHz) : 0.117 W (QPSK) (20.68 dBm) 0.132 W (16-QAM) (21.20 dBm) Band 7 (15 MHz) : 0.124 W (QPSK) (20.94 dBm) 0.137 W (16-QAM) (21.37 dBm) Band 7 (20 MHz) : 0.120 W (QPSK) (20.80 dBm) 0.124 W (16-QAM) (20.95 dBm)
Emission Designator(s):	Band 7 (5 MHz) : 4M50G7D (QPSK) / 4M50W7D (16-QAM) Band 7 (10 MHz) : 8M97G7D (QPSK) / 8M94W7D (16-QAM) Band 7 (15 MHz) : 13M4G7D (QPSK) / 13M4W7D (16-QAM) Band 7 (20 MHz) : 17M8G7D (QPSK) / 17M8W7D (16-QAM)

The measurements shown in this report were made in accordance with the procedures specified in §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

Report prepared by
: Jong Seok Lee
Test engineer of RF Team

Approved by
: Chang Seok Choi
Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1405-F013	May 20, 2014	- First Approval Report
HCT-R-1405-F013-1	May 29, 2014	- Insert the Information for WCP on Section 4 - Revise the Frequency Stability Limit on Section 3.5 and 5.0 - Retest the Conducted Spurious Emissions
HCT-R-1405-F013-2	May 30, 2014	- Retest the Conducted Spurious Emissions

Table of Contents

1. GENERAL INFORMATION		4
2. INTRODUCTION		5
2.1. EUT DESCRIPTION.....		5
2.2. MEASURING INSTRUMENT CALIBRATION.....		5
2.3. TEST FACILITY		5
3. DESCRIPTION OF TESTS		6
3.1 ERP/EIRP RADIATED POWER AND RADIATED SPURIOUS EMISSIONS.....		6
3.2 OCCUPIED BANDWIDTH.		7
3.3 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....		8
3.4 PEAK-AVERAGE RATIO.		9
3.5 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE		11
4. LIST OF TEST EQUIPMENT		12
5. SUMMARY OF TEST RESULTS		13
6. SAMPLE CALCULATION		14
7. TEST DATA		15
7.1 EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT_ stand alone.....		15
7.2 EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT_ with wireless charging Pad.....		17
7.3 RADIATED SPURIOUS EMISSIONS_ stand alone.....		19
7.3.1 RADIATED SPURIOUS EMISSIONS (Band 7_5M).....		19
7.3.2 RADIATED SPURIOUS EMISSIONS (Band 7_10M).....		20
7.3.3 RADIATED SPURIOUS EMISSIONS (Band 7_15M).....		21
7.3.4 RADIATED SPURIOUS EMISSIONS (Band 7_20M).....		22
7.4 RADIATED SPURIOUS EMISSIONS_ with wireless charging pad.....		23
7.4.1 RADIATED SPURIOUS EMISSIONS (Band 7_5M).....		23
7.4.2 RADIATED SPURIOUS EMISSIONS (Band 7_10M).....		24
7.4.3 RADIATED SPURIOUS EMISSIONS (Band 7_15M).....		25
7.4.4 RADIATED SPURIOUS EMISSIONS (Band 7_20M).....		26
7.5 PEAK-TO-AVERAGE RATIO		27
7.6 OCCUPIED BANDWIDTH		27
7.7 CONDUCTED SPURIOUS EMISSIONS		28
7.7.1 BAND EDGE.....		28
7.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE		29
7.8.1 FREQUENCY STABILITY (LTE Band 7_5M).....		29
7.8.2 FREQUENCY STABILITY (LTE Band 7_10M).....		30
7.8.3 FREQUENCY STABILITY (LTE Band 7_15M).....		31
7.8.4 FREQUENCY STABILITY (LTE Band 7_20M).....		32
8. TEST PLOTS.....		33



MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name: LG Electronics MobileComm U.S.A., Inc.

Address: 1000 Sylvan Avenue, Englewood Cliffs NJ 07632

FCC ID: ZNFD855P

Application Type: Certification

FCC Classification: Licensed Portable Transmitter Held to Ear (PCE)

FCC Rule Part(s): §2 , §27

EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC

FCC Model(s): LG-D855P

Additional FCC Model(s): LG-D855p, D855P, D855p, LGD855P, LGD855p, LG-D855AR, LG-D855ar, LGD855AR, LGD855ar, D855AR, D855ar

Tx Frequency: 2502.5 MHz – 2567.5 MHz (LTE – Band 7): 5 MHz
 2505.0 MHz – 2565.0 MHz (LTE – Band 7): 10 MHz
 2507.5 MHz – 2562.5 MHz (LTE – Band 7): 15 MHz
 2510.0 MHz – 2560.0 MHz (LTE – Band 7): 20 MHz

Max. RF Output Power Normal battery Charger:

Band 7 (5 MHz) :	0.141 W (QPSK) (21.49 dBm)
	0.143 W (16-QAM) (21.55 dBm)
Band 7 (10 MHz) :	0.147 W (QPSK) (21.66 dBm)
	0.175 W (16-QAM) (22.42 dBm)
Band 7 (15 MHz) :	0.123 W (QPSK) (20.90 dBm)
	0.137 W (16-QAM) (21.38 dBm)
Band 7 (20 MHz) :	0.108 W (QPSK) (20.35 dBm)
	0.135 W (16-QAM) (21.29 dBm)

Max. RF Output Power Wireless battery Charger:

Band 7 (5 MHz) :	0.115 W (QPSK) (20.60 dBm)
	0.126 W (16-QAM) (21.02 dBm)
Band 7 (10 MHz) :	0.117 W (QPSK) (20.68 dBm)
	0.132 W (16-QAM) (21.20 dBm)
Band 7 (15 MHz) :	0.124 W (QPSK) (20.94 dBm)
	0.137 W (16-QAM) (21.37 dBm)
Band 7 (20 MHz) :	0.120 W (QPSK) (20.80 dBm)
	0.124 W (16-QAM) (20.95 dBm)

Emission Designator(s):

Band 7 (5 MHz) :	4M50G7D (QPSK) / 4M50W7D (16-QAM)
Band 7 (10 MHz) :	8M97G7D (QPSK) / 8M94W7D (16-QAM)
Band 7 (15 MHz) :	13M4G7D (QPSK) / 13M4W7D (16-QAM)
Band 7 (20 MHz) :	17M8G7D (QPSK) / 17M8W7D (16-QAM)

Date(s) of Tests: April 10, 2014 ~ May 30, 2014

Antenna Specification Manufacturer: AT&C Co. LTD.
 Antenna type: Internal Antenna
 Peak Gain: Band 7: 1.08 dBi

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



2. INTRODUCTION

2.1. EUT DESCRIPTION

The LG Electronics MobileComm U.S.A., Inc. LG-D855P Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC consists of LTE 7.

Note : All test performed with the battery cover already incorporate the NFC antenna and Wireless charging capability.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea.



3. DESCRIPTION OF TESTS

3.1 ERP/EIRP RADIATED POWER AND RADIATED SPURIOUS EMISSIONS

ERP/EIRP

Note: ERP(Effective Radiated Power), EIRP(Equivalent Isotropic Radiated Power)

Test Procedure

Radiated emission measurements are performed in the Fully-anechoic chamber. The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-C-2004 Clause 2.2.17. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission. The level and position of the maximized emission is recorded with the spectrum analyzer using a positive peak detector.

A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(dBm)} = P_{g(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

The maximum EIRP is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration


Radiated spurious emissions

1. Frequency Range : 30 MHz ~ 10th Harmonics of highest channel fundamental frequency.
2. Measured distance : 30 MHz ~ 11 GHz at 3 m
11 GHz ~ 26 GHz at 1m
3. The EUT was setup to maximum output power. The 100 kHz RBW was used to scan from 30 MHz to 1 GHz. Also, the 1 MHz RBW was used to scan from 1 GHz to 26.5 GHz. And limit is -25 dBm. The high, low and a middle channel were tested for out of band measurements.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF855P

3.2 OCCUPIED BANDWIDTH.

Test set-up

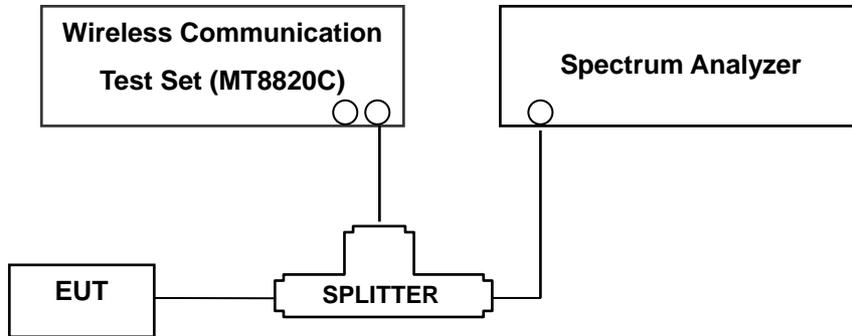

(Configuration of conducted Emission measurement)

Test Procedure

OBW is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r01, June 7, 2013, Section 4.2

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. Plots of the EUT's occupied bandwidth are shown herein.



3.3 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.

Test Procedure

Spurious and harmonic emissions at antenna terminal is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r01, June 7, 2013, Section 6.0.

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer.

The EUT was setup to maximum output power. The 1 MHz RBW was used to scan from 30 MHz to 26.5 GHz. And limit is -25 dBm. The high, low and a middle channel were tested for out of band measurements.

- Channel Edge Requirement : In the 1MHz bands immediately outside and adjacent to the channel, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions. Limit is -13dBm at channel edge and -25dBm at up to 5.5MHz from the channel edge.

NOTES: The analyzer plot offsets were determined by below conditions.

- For LTE Band 7, total offset 27.7 dBm = 20 dBm attenuator + 6 dBm Divider + 1.7 dBm RF cables.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P



3.4 PEAK-AVERAGE RATIO.

Test Procedure

Peak to Average Power Ratio is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r01, June 7, 2013, Section 5.7.

- Section 5.7.1 CCDF Procedure

- a) Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
- b) Set the number of counts to a value that stabilizes the measured CCDF curve;
- c) Set the measurement interval as follows:
 - 1) for continuous transmissions, set to 1 ms,
 - 2) for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
- d) Record the maximum PAPR level associated with a probability of 0.1%.

- Section 5.7.2 Alternate Procedure

Use one of the procedures presented in 5.1 to measure the total peak power and record as P_{Pk} . Use one of the applicable procedures presented 5.2 to measure the total average power and record as P_{Avg} . Determine the P.A.R. from: $P.A.R_{(dB)} = P_{Pk (dBm)} - P_{Avg (dBm)}$ (P_{Avg} = Average Power + Duty cycle Factor)

5.1.1 Peak power measurements with a spectrum/signal analyzer or EMI receiver

The following procedure can be used to determine the total peak output power.

- a) Set the RBW \geq OBW.
- b) Set VBW $\geq 3 \times$ RBW.
- c) Set span $\geq 2 \times$ RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Ensure that the number of measurement points \geq span/RBW.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the peak amplitude level.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF855P

5.2.2 Procedures for use with a spectrum/signal analyzer when EUT cannot be configured to transmit continuously and sweep triggering/signal gating cannot be properly implemented

If the EUT cannot be configured to transmit continuously (burst duty cycle < 98%), then one of the following procedures can be used. The selection of the applicable procedure will depend on the characteristics of the measured burst duty cycle.

Measure the burst duty cycle with a spectrum/signal analyzer or EMC receiver can be used in zero-span mode if the response time and spacing between bins on the sweep are sufficient to permit accurate measurement of the burst on/off time of the transmitted signal.

5.2.2.2 Constant burst duty cycle


If the measured burst duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent), then:

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW ≥ 3 x RBW.
- d) Number of points in sweep ≥ 2 × span / RBW. (This gives bin-to-bin spacing ≤ RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (power averaging).
- g) Set sweep trigger to “free run”.
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
- j) Add 10 log (1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission).

For example, add 10 log (1/0.25) = 6 dB if the duty cycle is a constant 25%.

3.5 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

Test Set-up

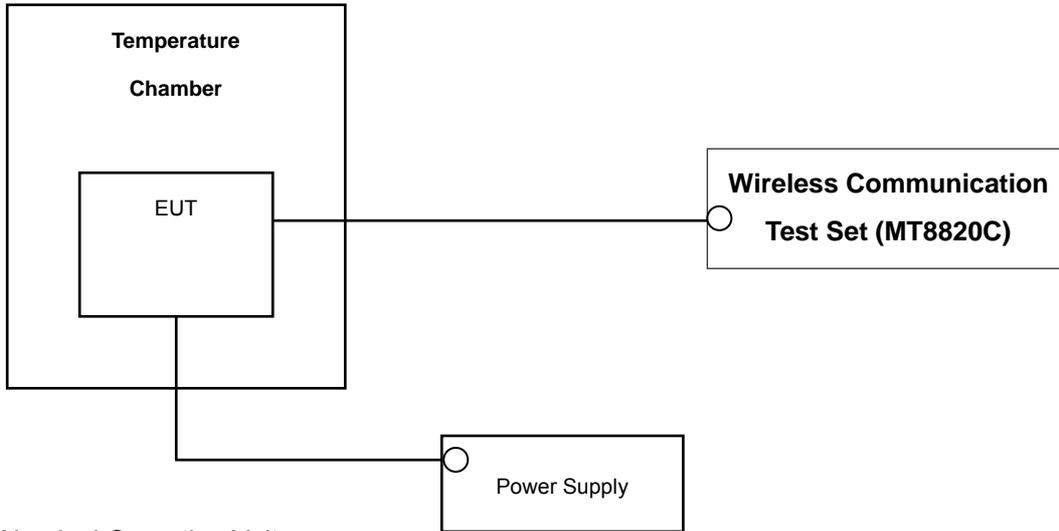

* Nominal Operating Voltage

Test Procedure

Frequency stability is tested in accordance with ANSI/TIA-603-C-2004 section 2.2.2.

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from battery end point to 115 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification — the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block(LTE Band7).

Time Period and Procedure:

The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).

1. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
2. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibration Interval	Calibration Due
LG Electronics USA	WCP-300/WCP (FCC ID : BEJWCP300)	303HYR026898	-	-	-
Agilent	N1921A/ Power Sensor	MY45241059	07/11/2013	Annual	07/11/2014
Agilent	N1911A/ Power Meter	MY45100523	01/24/2014	Annual	01/24/2015
MITEQ	AMF-6D-001180-35-20P/AMP	1081666	09/12/2013	Annual	09/12/2014
Wainwright	WHK1.2/15G-10EF/H.P.F	4	06/24/2013	Annual	06/24/2014
Wainwright	WHK3.3/18G-10EF/H.P.F	2	06/24/2013	Annual	06/24/2014
Hewlett Packard	11667B / Power Splitter	10545	02/22/2014	Annual	02/22/2015
Digital	EP-3010/ Power Supply	3110117	10/29/2013	Annual	10/29/2014
Schwarzbeck	UHAP/ Dipole Antenna	557	03/05/2013	Biennial	03/05/2015
Schwarzbeck	UHAP/ Dipole Antenna	558	05/03/2013	Biennial	05/03/2015
Korea Engineering	KR-1005L / Chamber	KRAB05063-3CH	10/30/2013	Annual	10/30/2014
Schwarzbeck	BBHA 9120D/ Horn Antenna	1191	12/03/2013	Biennial	12/03/2015
Schwarzbeck	BBHA 9120D/ Horn Antenna	1151	10/05/2013	Biennial	10/05/2015
Agilent	E4440A/Spectrum Analyzer	US45303008	04/09/2014	Annual	04/09/2015
WEINSCHL	ATTENUATOR	BR0592	10/28/2013	Annual	10/28/2014
REOHDE&SCHWARZ	FSV40/Spectrum Analyzer	1307.9002K40-100931-NK	06/10/2013	Annual	06/10/2014
Agilent	8960 (E5515C)/ Base Station	GB45070669	08/31/2013	Annual	08/31/2014

FCC CERTIFICATION REPORT

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P

5. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result
2.1049,	Occupied Bandwidth	N/A	CONDUCTED	PASS
2.1051, 27.53(m)(4)	Band Edge / Conducted Spurious Emissions.	< 43 +10 log ₁₀ (P[Watts]) at Band Edge and < 55 +10 log ₁₀ (P[Watts]) at 5.5MHz from the Band Edges.		PASS
27.50(d)(5)	Peak-Average Ratio	< 13 dB		PASS
*2.1046	Conducted Output Power	N/A		PASS
2.1055, 27.54	Frequency stability	< 2.5 ppm		PASS
27.50(h)(2)	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP	RADIATED	PASS
2.1053, 27.53(m)(4)	Undesirable Emissions	< 55 +10 log ₁₀ (P[Watts]) for all out-of-band emissions		PASS

*See SAR Report

6. SAMPLE CALCULATION

A. EIRP Sample Calculation

Mode	Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
	channel	Freq.(MHz)						W	dBm
LTE Band7	21100	2,535.00	-15.36	19.46	10.72	1.78	V	0.69	28.40

EIRP = SubstituteLEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a wooden tripod is 0.8 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of Equivalent Isotropic Radiated Power (**EIRP**).

B. Emission Designator

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

16QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = main carrier modulated in a combination of two

or more of the following modes;

amplitude, angle, pulse

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

7. TEST DATA

7.1 EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT_stand alone

Effective Radiated Power Data (Band 7 – 5 MHz)

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
2502.5	5 MHz	QPSK	-22.83	11.65	10.63	1.35	V	0.124	20.93
		16-QAM	-22.66	11.82	10.63	1.35	V	0.129	21.10
2535.0		QPSK	-22.34	12.19	10.67	1.37	V	0.141	21.49
		16-QAM	-22.28	12.25	10.67	1.37	V	0.143	21.55
2567.5		QPSK	-22.44	11.64	10.73	1.37	V	0.126	21.00
		16-QAM	-22.48	11.60	10.73	1.37	V	0.125	20.96

Note: Worst case is 1 resource block.

Effective Radiated Power Data (Band 7 – 10 MHz)

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
2505.0	10 MHz	QPSK	-22.72	11.72	10.64	1.35	V	0.126	21.01
		16-QAM	-22.53	11.91	10.64	1.35	V	0.132	21.20
2535.0		QPSK	-22.29	12.24	10.67	1.37	V	0.143	21.54
		16-QAM	-21.41	13.12	10.67	1.37	V	0.175	22.42
2565.0		QPSK	-21.72	12.30	10.73	1.37	V	0.147	21.66
		16-QAM	-21.21	12.81	10.73	1.37	V	0.165	22.17

Note: Worst case is 1 resource block.

Effective Radiated Power Data (Band 7 – 15 MHz)

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
2507.5	15 MHz	QPSK	-22.73	11.61	10.64	1.35	V	0.123	20.90
		16-QAM	-23.25	11.09	10.64	1.35	V	0.109	20.38
2535.0		QPSK	-22.97	11.56	10.67	1.37	V	0.122	20.86
		16-QAM	-22.45	12.08	10.67	1.37	V	0.137	21.38
2562.5		QPSK	-22.82	11.44	10.73	1.37	V	0.120	20.80
		16-QAM	-22.93	11.33	10.73	1.37	V	0.117	20.69

Note: Worst case is 1 resource block.

Effective Radiated Power Data (Band 7 – 20 MHz)

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
2510.0	20 MHz	QPSK	-23.29	11.06	10.64	1.35	V	0.108	20.35
		16-QAM	-23.27	11.08	10.64	1.35	V	0.109	20.37
2535.0		QPSK	-24.00	10.53	10.67	1.37	V	0.096	19.83
		16-QAM	-22.54	11.99	10.67	1.37	V	0.135	21.29
2560.0		QPSK	-24.33	10.05	10.73	1.37	V	0.087	19.41
		16-QAM	-24.54	9.84	10.73	1.37	V	0.083	19.20

Note: Worst case is 1 resource block.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For 5 MHz, 10MHz BW signals, a peak detector is used, with RBW ≥ OBW, VBW ≥ 3 x RBW. A Horn antenna was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is z plane in LTE mode. Also worst case of detecting Antenna is vertical polarization in LTE mode.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P

7.2 EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT_ with wireless charging Pad

Effective Radiated Power Data (Band 7 – 5 MHz)

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
2502.5	5 MHz	QPSK	-23.40	11.08	10.63	1.35	H	0.109	20.36
		16-QAM	-22.74	11.74	10.63	1.35	H	0.126	21.02
2535.0		QPSK	-23.23	11.30	10.67	1.37	H	0.115	20.60
		16-QAM	-22.87	11.66	10.67	1.37	H	0.125	20.96
2567.5		QPSK	-23.21	10.87	10.73	1.37	H	0.105	20.23
		16-QAM	-23.24	10.84	10.73	1.37	H	0.105	20.20

Note: Worst case is 1 resource block.

Effective Radiated Power Data (Band 7 – 10 MHz)

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
2505.0	10 MHz	QPSK	-23.46	10.98	10.64	1.35	H	0.106	20.27
		16-QAM	-23.18	11.26	10.64	1.35	H	0.114	20.55
2535.0		QPSK	-23.35	11.18	10.67	1.37	H	0.112	20.48
		16-QAM	-22.76	11.77	10.67	1.37	H	0.128	21.07
2565.0		QPSK	-22.70	11.32	10.73	1.37	H	0.117	20.68
		16-QAM	-22.18	11.84	10.73	1.37	H	0.132	21.20

Note: Worst case is 1 resource block.



Effective Radiated Power Data (Band 7 – 15 MHz)

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
2507.5	15 MHz	QPSK	-23.20	11.14	10.64	1.35	H	0.110	20.43
		16-QAM	-23.19	11.15	10.64	1.35	H	0.111	20.44
2535.0		QPSK	-22.89	11.64	10.67	1.37	H	0.124	20.94
		16-QAM	-22.46	12.07	10.67	1.37	H	0.137	21.37
2562.5		QPSK	-23.20	11.06	10.73	1.37	H	0.110	20.42
		16-QAM	-23.18	11.08	10.73	1.37	H	0.111	20.44

Note: Worst case is 1 resource block.

Effective Radiated Power Data (Band 7 – 20 MHz)

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
2510.0	20 MHz	QPSK	-23.90	10.45	10.64	1.35	H	0.094	19.74
		16-QAM	-23.24	11.11	10.64	1.35	H	0.110	20.40
2535.0		QPSK	-23.03	11.50	10.67	1.37	H	0.120	20.80
		16-QAM	-22.88	11.65	10.67	1.37	H	0.124	20.95
2560.0		QPSK	-24.21	10.17	10.73	1.37	H	0.090	19.53
		16-QAM	-24.20	10.18	10.73	1.37	H	0.090	19.54

Note: Worst case is 1 resource block.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For 5 MHz, 10MHz BW signals, a peak detector is used, with RBW ≥ OBW, VBW ≥ 3 x RBW. A Horn antenna was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is x plane in LTE mode. Also worst case of detecting Antenna is horizontal polarization in LTE mode.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF0855P



7.3 RADIATED SPURIOUS EMISSIONS_stand alone

7.3.1 RADIATED SPURIOUS EMISSIONS (Band 7_5M)

OPERATING FREQUENCY : 2502.50 MHz
 MEASURED OUTPUT POWER: 21.55 dBm = 0.143 W
 MODULATION SIGNAL: 5 MHz 16-QAM
 DISTANCE: 3 meters
 LIMIT: $55 + 10 \log_{10}(W) =$ 46.55 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20775 (2502.5)	5005.0	-39.72	12.40	-40.50	2.00	H	-30.10	51.65
	7507.5	-49.03	11.06	-39.41	2.35	V	-30.70	52.25
	10010.0	-54.68	11.68	-41.21	3.18	V	-32.71	54.26
21100 (2535.0)	5070.0	-38.62	12.30	-39.21	1.96	H	-28.87	50.42
	7605.0	-54.74	11.30	-44.94	2.49	V	-36.13	57.68
	10140.0	-55.33	11.59	-42.41	3.25	V	-34.07	55.62
21425 (2567.5)	5135.0	-40.93	12.35	-41.15	2.00	H	-30.80	52.35
	7702.5	-	-	-	-	-	-	-
	10270.0	-	-	-	-	-	-	-

- NOTES:**
1. Radiated Spurious Emission Measurements at 1 meter and 3 meter by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF855P



7.3.2 RADIATED SPURIOUS EMISSIONS (Band 7_10M)

OPERATING FREQUENCY : 2505.00 MHz
 MEASURED OUTPUT POWER: 22.42 dBm = 0.175 W
 MODULATION SIGNAL: 10 MHz 16-QAM
 DISTANCE: 3 meters
 LIMIT: $55 + 10 \log_{10}(W) =$ 47.42 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20800 (2505.0)	5010.0	-42.70	12.39	-43.46	2.01	H	-33.08	55.50
	7515.0	-50.34	11.08	-40.74	2.35	V	-32.01	54.43
	10020.0	-52.28	11.69	-39.18	3.59	V	-31.08	53.50
21100 (2535.0)	5070.0	-39.50	12.30	-40.09	1.96	H	-29.75	52.17
	7605.0	-54.66	11.30	-44.86	2.49	V	-36.05	58.47
	10140.0	-55.83	11.59	-42.91	3.25	V	-34.57	56.99
21400 (2565.0)	5130.0	-43.01	12.34	-43.34	2.01	H	-33.01	55.43
	7695.0	-	-	-	-	-	-	-
	10260.0	-	-	-	-	-	-	-

- NOTES:**
1. Radiated Spurious Emission Measurements at 1 meter and 3 meter by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block.



7.3.3 RADIATED SPURIOUS EMISSIONS (Band 7_15M)

OPERATING FREQUENCY : 2535.00 MHz
 MEASURED OUTPUT POWER: 21.38 dBm = 0.137 W
 MODULATION SIGNAL: 15 MHz 16-QAM
 DISTANCE: 3 meters
 LIMIT: $55 + 10 \log_{10}(W) =$ 46.38 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20825 (2507.5)	5015.0	-41.77	12.39	-42.52	2.02	H	-32.15	53.53
	7522.5	-46.36	11.10	-37.36	2.35	V	-28.61	49.99
	10030.0	-51.23	11.69	-38.94	3.62	V	-30.87	52.25
21100 (2535.0)	5070.0	-39.16	12.30	-39.75	1.96	H	-29.41	50.79
	7605.0	-51.47	11.30	-41.67	2.49	V	-32.86	54.24
	10140.0	-	-	-	-	-	-	-
21375 (2562.5)	5125.0	-41.44	12.33	-41.72	2.03	H	-31.42	52.80
	7687.5	-51.61	11.44	-41.92	2.48	V	-32.96	54.34
	10250.0	-	-	-	-	-	-	-

- NOTES:**
1. Radiated Spurious Emission Measurements at 1 meter and 3 meter by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block.



7.3.4 RADIATED SPURIOUS EMISSIONS (Band 7_20M)

OPERATING FREQUENCY : 2535.00 MHz
 MEASURED OUTPUT POWER: 21.29 dBm = 0.135 W
 MODULATION SIGNAL: 20 MHz 16-QAM
 DISTANCE: 3 meters
 LIMIT: $55 + 10 \log_{10}(W) =$ 46.29 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20850 (2510.0)	5020.0	-40.35	12.38	-41.30	2.03	V	-30.95	52.24
	7530.0	-47.10	11.12	-38.15	2.34	V	-29.37	50.66
	10040.0	-51.57	11.70	-38.14	3.55	V	-29.99	51.28
21100 (2535.0)	5070.0	-40.91	12.30	-41.50	1.96	H	-31.16	52.45
	7605.0	-51.95	11.30	-42.15	2.49	V	-33.34	54.63
	10140.0	-54.29	11.59	-41.37	3.25	V	-33.03	54.32
21350 (2560.0)	5120.0	-44.30	12.31	-44.54	2.05	V	-34.28	55.57
	7680.0	-49.94	11.43	-40.68	2.46	V	-31.71	53.00
	10240.0	-	-	-	-	-	-	-

- NOTES:**
1. Radiated Spurious Emission Measurements at 1 meter and 3 meter by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block.



7.4 RADIATED SPURIOUS EMISSIONS_ with wireless charging pad

7.4.1 RADIATED SPURIOUS EMISSIONS (Band 7_5M)

OPERATING FREQUENCY : 2502.50 MHz
 MEASURED OUTPUT POWER: 21.02 dBm = 0.126 W
 MODULATION SIGNAL: 5 MHz 16-QAM
 DISTANCE: 3 meters
 LIMIT: $55 + 10 \log_{10}(W) =$ 46.02 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20775 (2502.5)	5005.0	-42.46	12.40	-43.24	2.00	H	-32.84	53.86
	7507.5	-52.31	11.06	-42.69	2.35	H	-33.98	55.00
	10010.0	-55.01	11.68	-41.54	3.18	H	-33.04	54.06
21100 (2535.0)	5070.0	-41.90	12.30	-42.49	1.96	H	-32.15	53.17
	7605.0	-	-	-	-	-	-	-
	10140.0	-56.33	11.59	-43.41	3.25	H	-35.07	56.09
21425 (2567.5)	5135.0	-39.63	12.35	-39.85	2.00	H	-29.50	50.52
	7702.5	-	-	-	-	-	-	-
	10270.0	-	-	-	-	-	-	-

- NOTES:**
1. Radiated Spurious Emission Measurements at 1 meter and 3 meter by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block.

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF855P



7.4.2 RADIATED SPURIOUS EMISSIONS (Band 7_10M)

OPERATING FREQUENCY : 2505.00 MHz
 MEASURED OUTPUT POWER: 21.20 dBm = 0.132 W
 MODULATION SIGNAL: 10 MHz 16-QAM
 DISTANCE: 3 meters
 LIMIT: $55 + 10 \log_{10}(W) =$ 46.20 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20800 (2505.0)	5010.0	-44.39	12.39	-45.15	2.01	V	-34.77	55.97
	7515.0	-49.11	11.08	-39.51	2.35	V	-30.78	51.98
	10020.0	-51.88	11.69	-38.78	3.59	V	-30.68	51.88
21100 (2535.0)	5070.0	-42.19	12.30	-42.78	1.96	H	-32.44	53.64
	7605.0	-	-	-	-	-	-	-
	10140.0	-	-	-	-	-	-	-
21400 (2565.0)	5130.0	-41.08	12.34	-41.41	2.01	H	-31.08	52.28
	7695.0	-	-	-	-	-	-	-
	10260.0	-	-	-	-	-	-	-

- NOTES:**
1. Radiated Spurious Emission Measurements at 1 meter and 3 meter by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block.



7.4.3 RADIATED SPURIOUS EMISSIONS (Band 7_15M)

OPERATING FREQUENCY : 2535.00 MHz
 MEASURED OUTPUT POWER: 21.37 dBm = 0.137 W
 MODULATION SIGNAL: 15 MHz 16-QAM
 DISTANCE: 3 meters
 LIMIT: $55 + 10 \log_{10}(W) =$ 46.37 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20825 (2507.5)	5015.0	-42.76	12.39	-43.51	2.02	V	-33.14	54.51
	7522.5	-51.98	11.10	-42.98	2.35	V	-34.23	55.60
	10030.0	-52.67	11.69	-40.38	3.62	V	-32.31	53.68
21100 (2535.0)	5070.0	-42.87	12.30	-43.46	1.96	V	-33.12	54.49
	7605.0	-53.97	11.30	-44.17	2.49	V	-35.36	56.73
	10140.0	-56.63	11.59	-43.71	3.25	V	-35.37	56.74
21375 (2562.5)	5125.0	-46.66	12.33	-46.94	2.03	V	-36.64	58.01
	7687.5	-52.69	11.44	-43.00	2.48	V	-34.04	55.41
	10250.0	-56.31	11.42	-43.65	3.12	V	-35.35	56.72

- NOTES:**
1. Radiated Spurious Emission Measurements at 1 meter and 3 meter by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block.



7.4.4 RADIATED SPURIOUS EMISSIONS (Band 7_20M)

OPERATING FREQUENCY : 2535.00 MHz
 MEASURED OUTPUT POWER: 20.95 dBm = 0.124 W
 MODULATION SIGNAL: 20 MHz 16-QAM
 DISTANCE: 3 meters
 LIMIT: $55 + 10 \log_{10}(W) =$ 45.95 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20850 (2510.0)	5020.0	-42.85	12.38	-43.80	2.03	V	-33.45	54.40
	7530.0	-52.87	11.12	-43.92	2.34	V	-35.14	56.09
	10040.0	-51.26	11.70	-37.83	3.55	V	-29.68	50.63
21100 (2535.0)	5070.0	-43.54	12.30	-44.13	1.96	V	-33.79	54.74
	7605.0	-52.22	11.30	-42.42	2.49	V	-33.61	54.56
	10140.0	-56.34	11.59	-43.42	3.25	V	-35.08	56.03
21350 (2560.0)	5120.0	-49.90	12.31	-50.14	2.05	V	-39.88	60.83
	7680.0	-55.70	11.43	-46.44	2.46	V	-37.47	58.42
	10240.0	-55.63	11.44	-42.81	3.01	V	-34.38	55.33

- NOTES:**
1. Radiated Spurious Emission Measurements at 1 meter and 3 meter by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. Worst case is 1 resource block.

7.5 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
Band 7	5 MHz	2535.0	QPSK	25	0	5.63
			16-QAM	25	0	6.26
	10 MHz	2535.0	QPSK	50	0	5.65
			16-QAM	50	0	6.33
	15 MHz	2535.0	QPSK	75	0	5.50
			16-QAM	75	0	6.25
20 MHz	2535.0	QPSK	100	0	5.43	
		16-QAM	100	0	6.25	

- Plots of the EUT's Peak- to- Average Ratio are shown Page 38 ~ 41

7.6 OCCUPIED BANDWIDTH

Band	Band Width (MHz)	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
Band 7	5	2535.0	QPSK	25	0	4.5015
			16-QAM	25	0	4.4960
	10	2535.0	QPSK	50	0	8.9665
			16-QAM	50	0	8.9375
	15	2535.0	QPSK	75	0	13.438
			16-QAM	75	0	13.423
20	2535.0	QPSK	100	0	17.833	
		16-QAM	100	0	17.833	

- Plots of the EUT's Occupied Bandwidth are shown Page 34 ~ 37



7.7 CONDUCTED SPURIOUS EMISSIONS

- Plots of the EUT's Conducted Spurious Emissions are shown Page 48 ~ 59

7.7.1 BAND EDGE

Band	Band Width (MHz)	Frequency (Mhz)	Modulation	Resource Block Size	Resource Block Offset	Channel Edge Data [dBm]			
						Channel Edge (Limit: -13dBm)		At 5.5MHz from Channel Edge (Limit: -25dBm)	
						Lower	Upper	Lower	Upper
Band 7	5	2502.5	QPSK	25	0	-28.75	-24.99	-42.62	-39.51
		2535.0		25	0	-26.41	-27.03	-42.05	-41.92
		2567.5		25	0	-24.64	-22.12	-40.50	-35.78
	10	2505.0		50	0	-26.92	-27.66	-36.49	-31.40
		2535.0		50	0	-24.97	-26.64	-29.37	-29.80
		2565.0		50	0	-26.12	-26.18	-34.03	-30.57
	15	2507.5		75	0	-28.10	-28.39	-32.66	-29.61
		2535.0		75	0	-28.19	-29.89	-31.36	-31.37
		2562.5		75	0	-28.11	-27.78	-31.24	-31.28
	20	2510.0		100	0	-29.39	-29.87	-33.45	-31.61
		2535.0		100	0	-27.75	-29.93	-31.16	-32.33
		2560.0		100	0	-31.49	-28.85	-33.38	-31.41

- Plots of the EUT's Band Edge are shown Page 42 ~ 47

FCC CERTIFICATION REPORT


Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF855P
--------------------------------------	--------------------------------	---	--

7.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

7.8.1 FREQUENCY STABILITY (LTE Band 7_5M)

OPERATING FREQUENCY: 2535.000,000 Hz
 CHANNEL: 21100 (5 MHz)
 REFERENCE VOLTAGE: 3.8 VDC
 DEVIATION LIM IT: -

Voltage (%)	Power (VDC)	Temp. ()	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	2534 999 992	0	0.000 000	0.000
100%		-30	2535 000 004	12.4	0.000 000	0.005
100%		-20	2534 999 988	-4.1	0.000 000	-0.002
100%		-10	2534 999 981	-11.0	0.000 000	-0.004
100%		0	2535 000 000	8.1	0.000 000	0.003
100%		+10	2534 999 979	-13.0	-0.000 001	-0.005
100%		+30	2535 000 000	8.6	0.000 000	0.003
100%		+40	2534 999 998	6.4	0.000 000	0.003
100%		+50	2534 999 999	7.5	0.000 000	0.003
115%		4.37	+20	2534 999 997	5.1	0.000 000
Batt. Endpoint	3.23	+20	2535 000 003	11.4	0.000 000	0.004

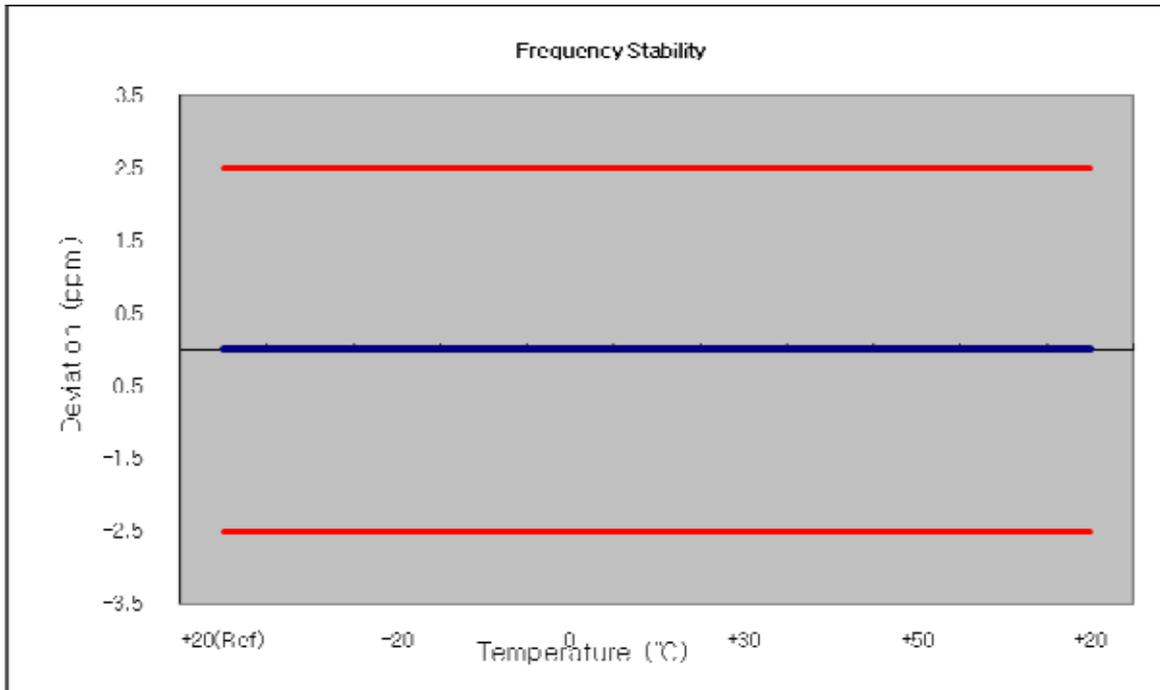


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF855P
--------------------------------------	--------------------------------	---	--

7.8.2 FREQUENCY STABILITY (LTE Band 7_10M)

OPERATING FREQUENCY: 2535.000,000 Hz
 CHANNEL: 21100 (10 MHz)
 REFERENCE VOLTAGE: 3.8 VDC
 DEVIATION LIMIT: -

Voltage (%)	Power (VDC)	Temp. ()	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	2535 000 007	0	0.000 000	0.000
100%		-30	2535 000 012	4.8	0.000 000	0.002
100%		-20	2535 000 003	-4.5	0.000 000	-0.002
100%		-10	2534 999 999	-8.9	0.000 000	-0.004
100%		0	2535 000 012	4.2	0.000 000	0.002
100%		+10	2534 999 996	-11.6	0.000 000	-0.005
100%		+30	2535 000 015	7.5	0.000 000	0.003
100%		+40	2535 000 021	13.6	0.000 001	0.005
100%		+50	2534 999 999	-8.7	0.000 000	-0.003
115%	4.37	+20	2535 000 018	10.4	0.000 000	0.004
Batt. Endpoint	3.23	+20	2534 999 997	-10.5	0.000 000	-0.004

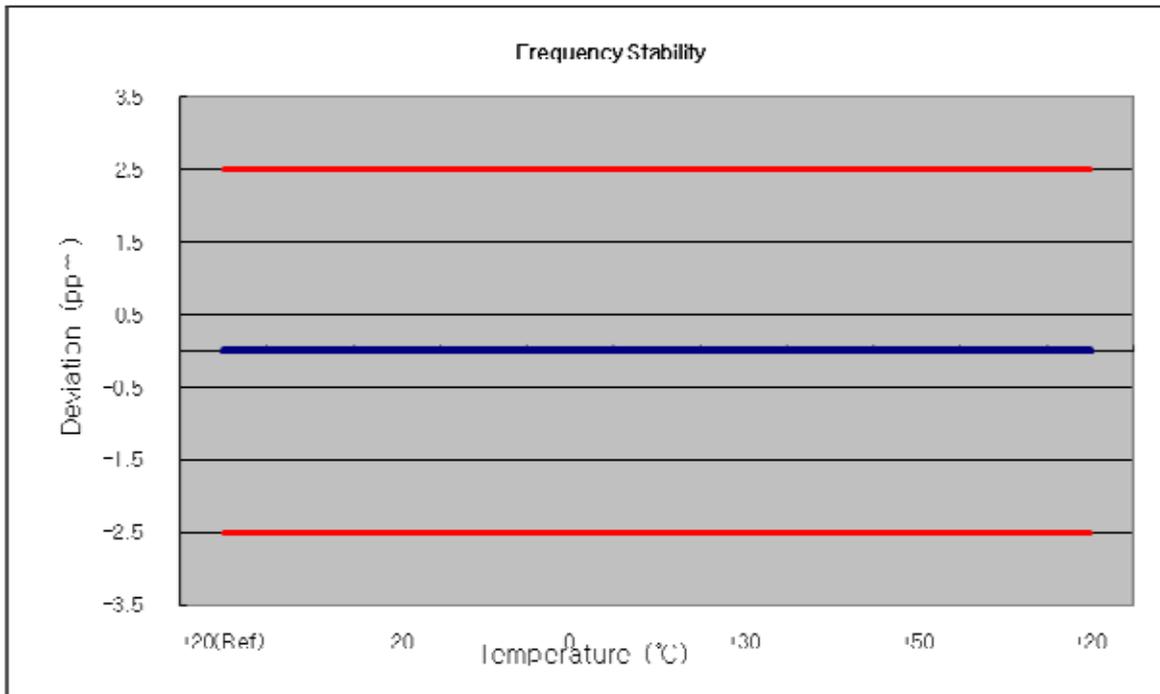


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF855P
--------------------------------------	--------------------------------	---	--

7.8.3 FREQUENCY STABILITY (LTE Band 7_15M)

OPERATING FREQUENCY: 2535.000,000 Hz
 CHANNEL: 21100 (15 MHz)
 REFERENCE VOLTAGE: 3.8 VDC
 DEVIATION LIMIT: -

Voltage (%)	Power (VDC)	Temp. ()	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	2535 000 007	0	0.000 000	0.000
100%		-30	2534 999 997	-10.0	0.000 000	-0.004
100%		-20	2535 000 022	15.4	0.000 001	0.006
100%		-10	2535 000 015	8.5	0.000 000	0.003
100%		0	2534 999 999	-7.5	0.000 000	-0.003
100%		+10	2535 000 017	10.4	0.000 000	0.004
100%		+30	2535 000 017	10.4	0.000 000	0.004
100%		+40	2534 999 994	-12.8	-0.000 001	-0.005
100%		+50	2535 000 016	9.1	0.000 000	0.004
115%	4.37	+20	2535 000 011	4.6	0.000 000	0.002
Batt. Endpoint	3.23	+20	2535 000 002	-5.2	0.000 000	-0.002

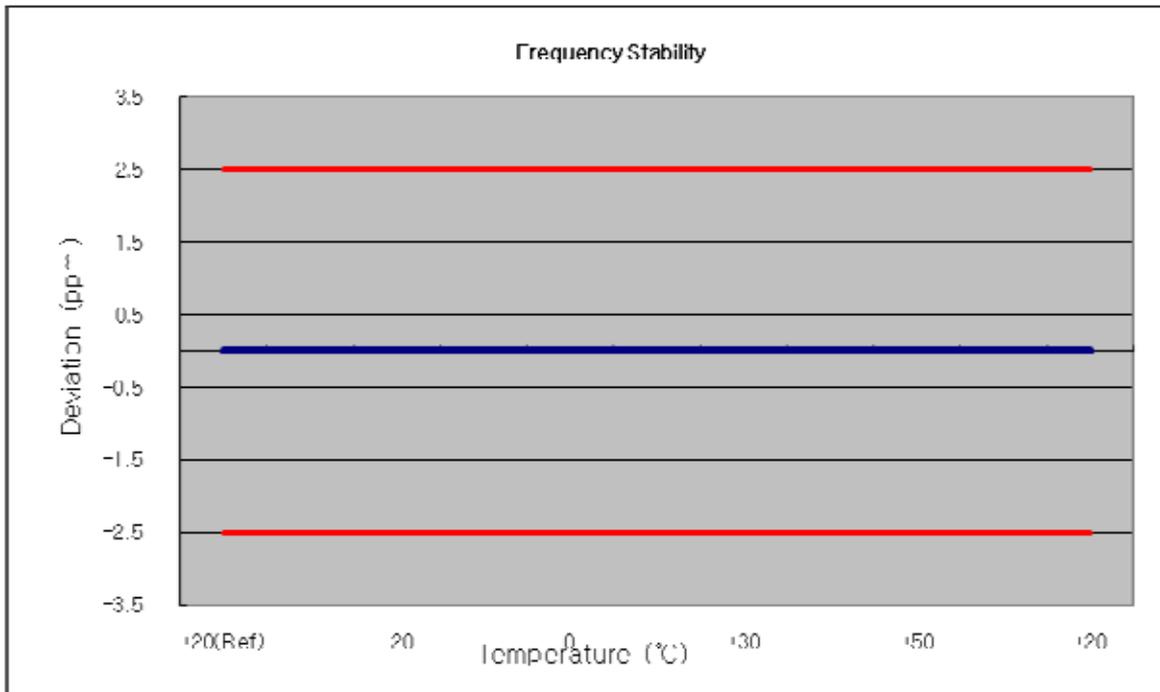


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF855P
--------------------------------------	--------------------------------	---	--

7.8.4 FREQUENCY STABILITY (LTE Band 7_20M)

OPERATING FREQUENCY: 2535.000,000 Hz
 CHANNEL: 21100 (20 MHz)
 REFERENCE VOLTAGE: 3.8 VDC
 DEVIATION LIMIT: -

Voltage (%)	Power (VDC)	Temp. ()	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.80	+20(Ref)	2535 000 009	0	0.000 000	0.000
100%		-30	2535 000 001	-8.3	0.000 000	-0.003
100%		-20	2534 999 998	-10.9	0.000 000	-0.004
100%		-10	2534 999 996	-13.2	-0.000 001	-0.005
100%		0	2534 999 994	-15.4	-0.000 001	-0.006
100%		+10	2534 999 998	-11.3	0.000 000	-0.004
100%		+30	2534 999 998	-10.8	0.000 000	-0.004
100%		+40	2534 999 996	-13.5	-0.000 001	-0.005
100%		+50	2534 999 999	-10.4	0.000 000	-0.004
115%	4.37	+20	2534 999 998	-11.2	0.000 000	-0.004
Batt. Endpoint	3.23	+20	2535 000 016	7.3	0.000 000	0.003

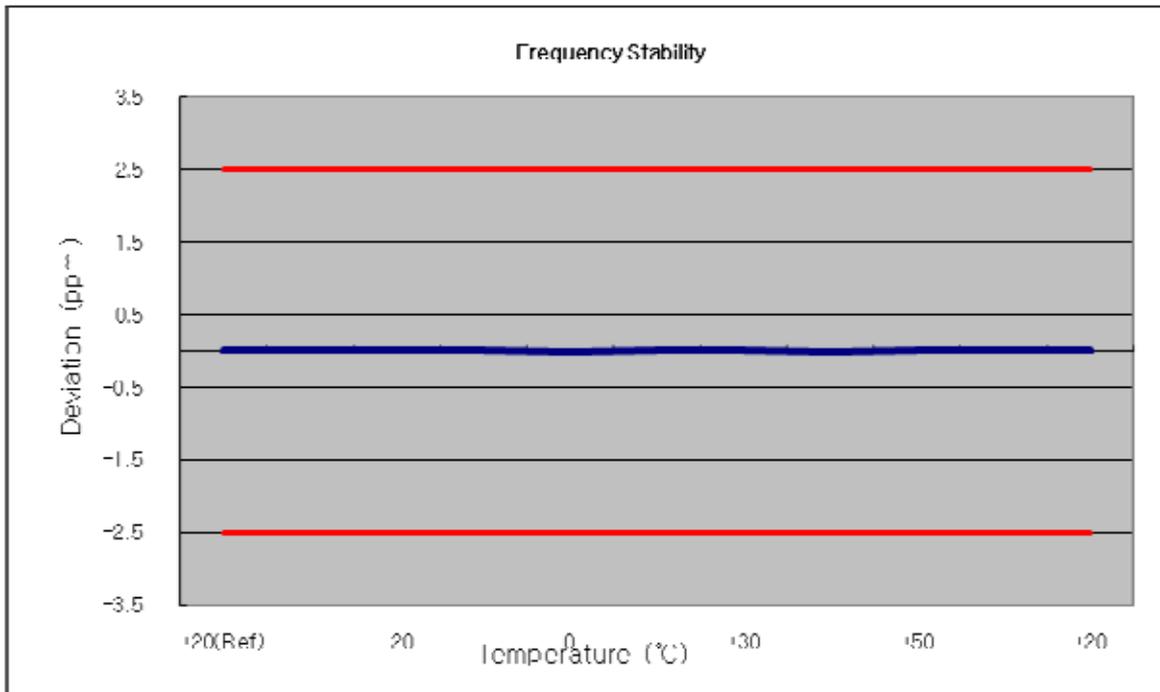

FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF855P
--------------------------------------	--------------------------------	---	--




8. TEST PLOTS

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P

Occupied Bandwidth Plot (5MHz Ch.21100 QPSK RB 25)




Occupied Bandwidth Plot (5MHz Ch.21100 16-QAM RB 25)

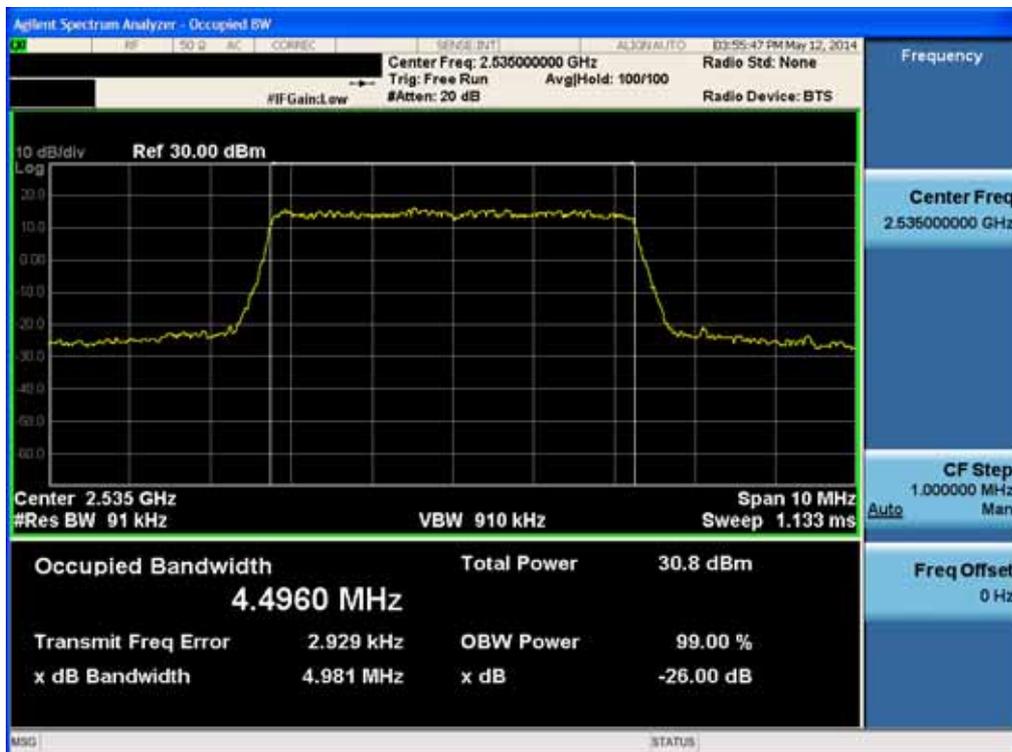


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF855P
--------------------------------------	--------------------------------	---	--

Occupied Bandwidth Plot (10MHz Ch.21100 QPSK RB 50)

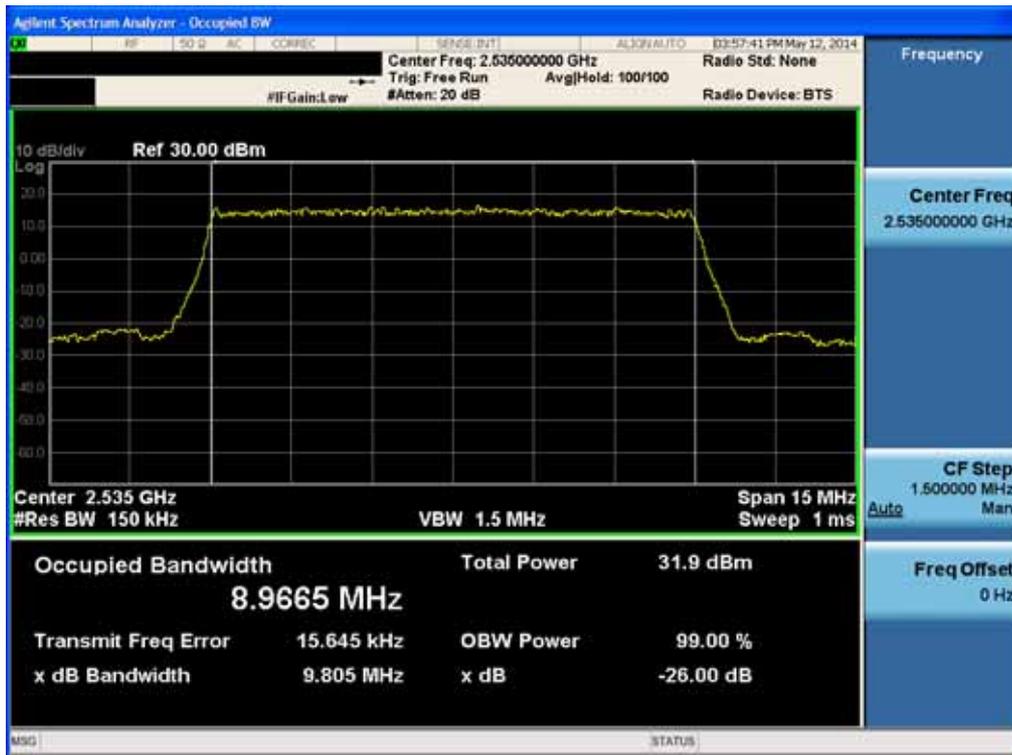


Occupied Bandwidth Plot (10MHz Ch.21100 16-QAM RB 50)

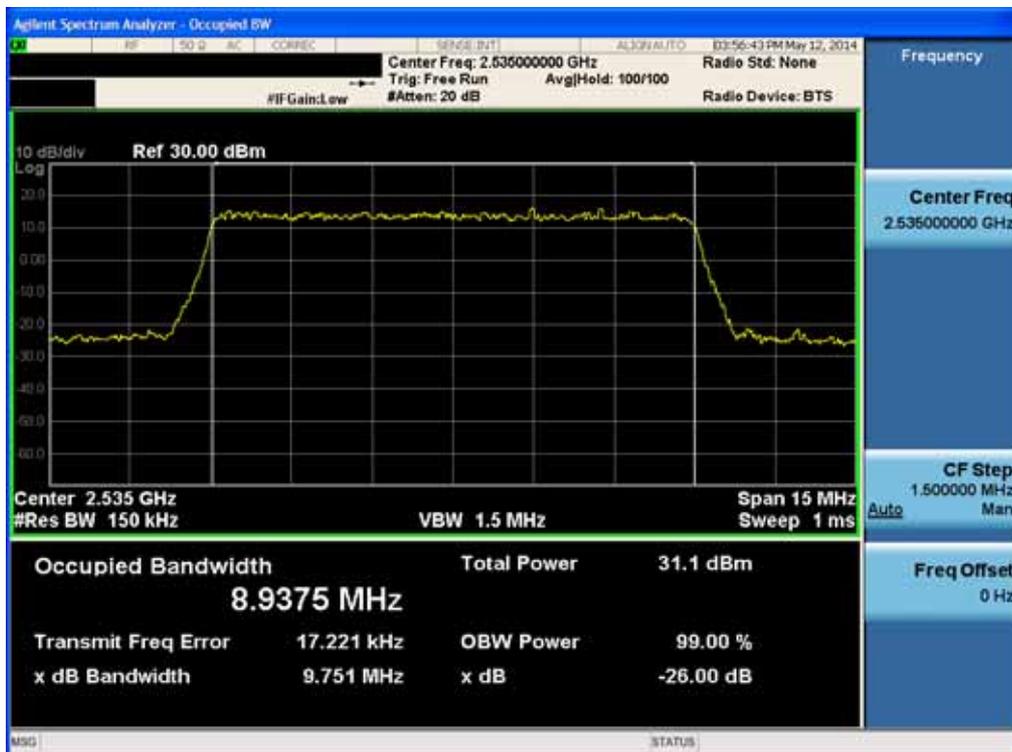


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---

Occupied Bandwidth Plot (15MHz Ch.21100 QPSK RB 75)

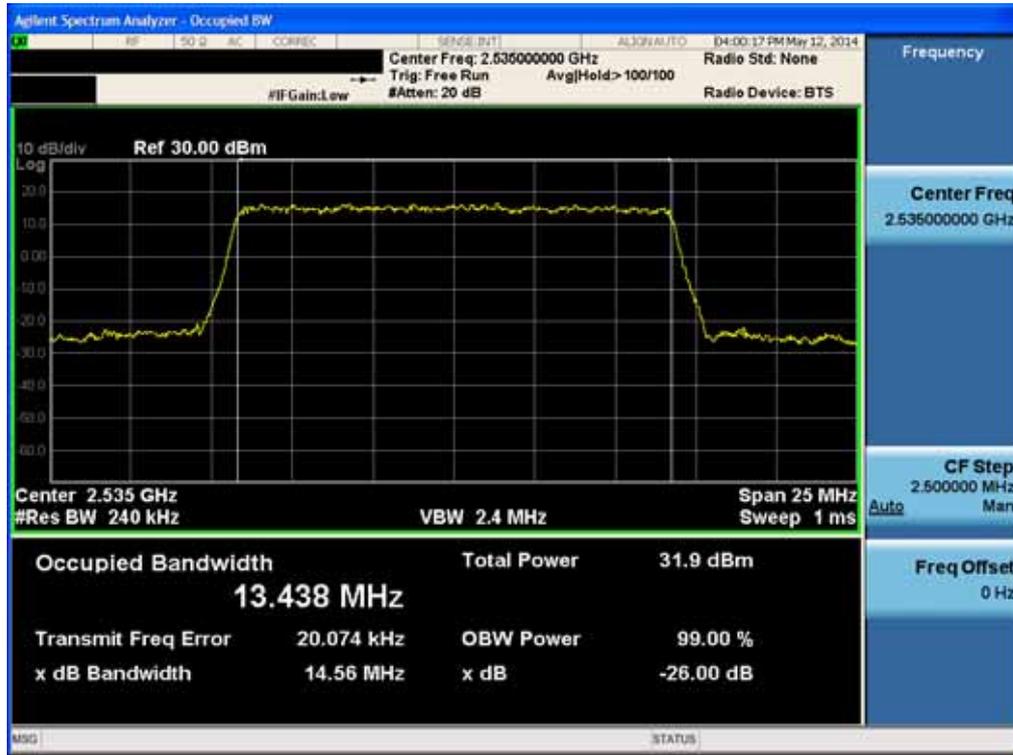

Occupied Bandwidth Plot (15MHz Ch.21100 16-QAM RB 75)

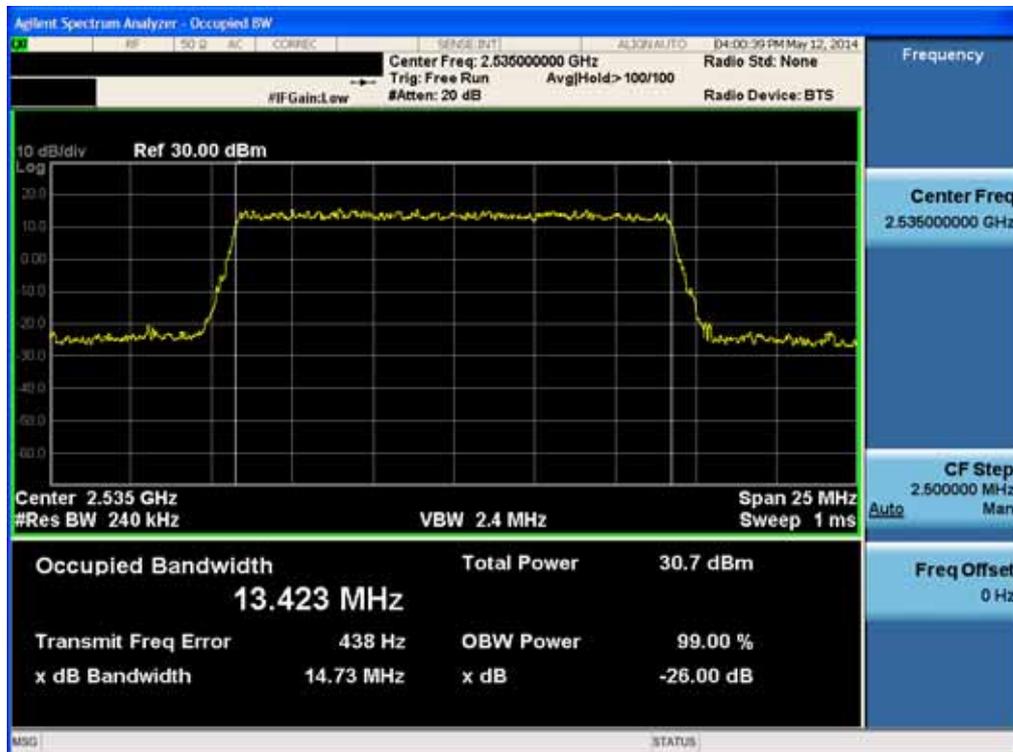


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---

Occupied Bandwidth Plot (20MHz Ch.21100 QPSK RB 100)




Occupied Bandwidth Plot (20MHz Ch.21100 16-QAM RB 100)

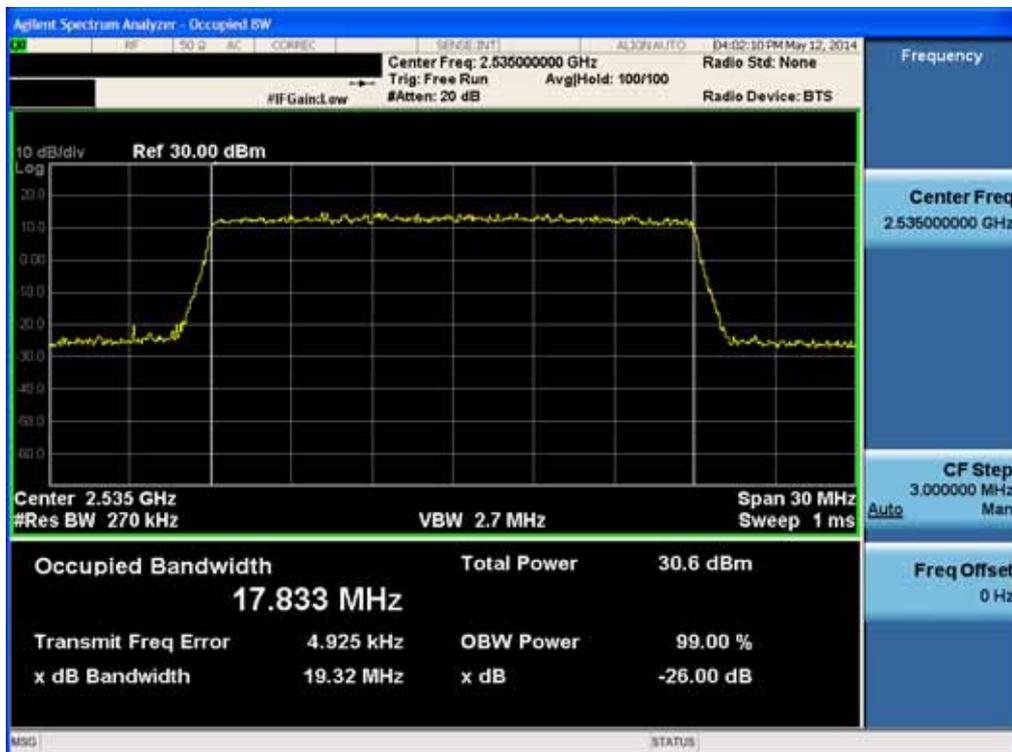


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---

Peak to Average Ratio Plot (5MHz Ch.21100 QPSK RB 25)

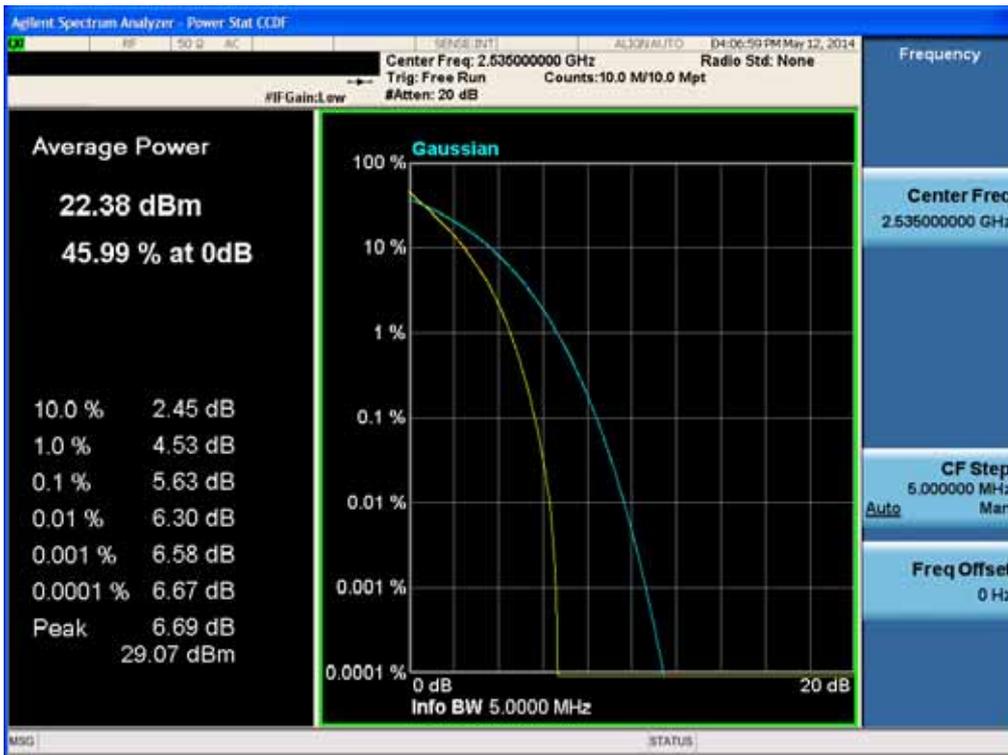


Peak to Average Ratio Plot (5MHz Ch.21100 16-QAM RB 25)

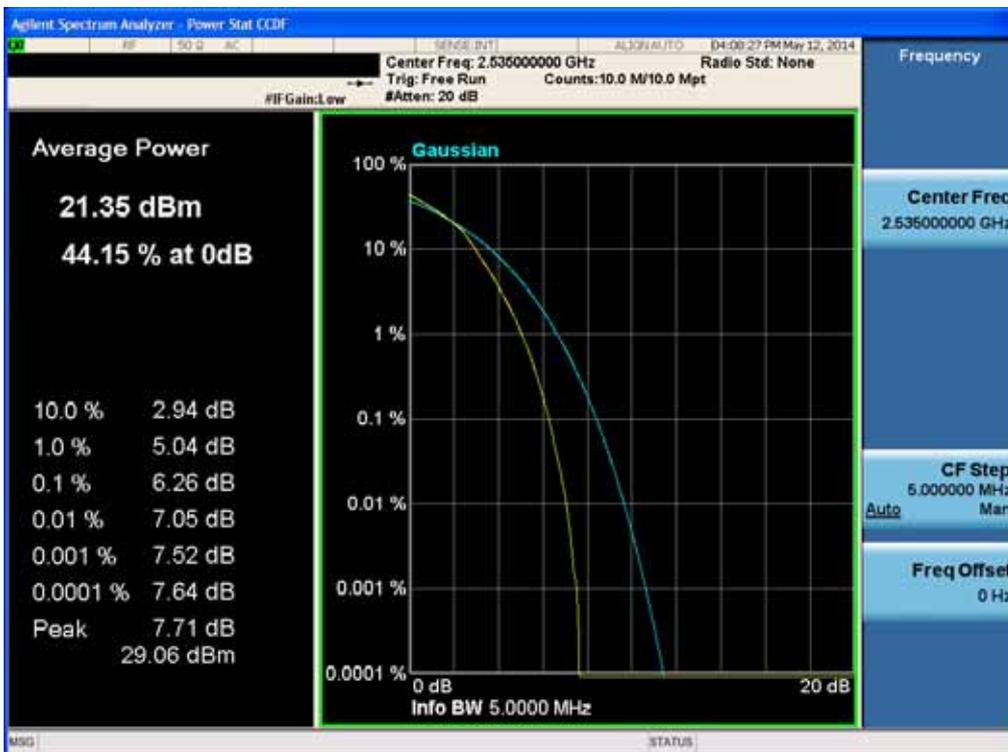

FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---

Peak to Average Ratio Plot (10MHz Ch.21100 QPSK RB 50)

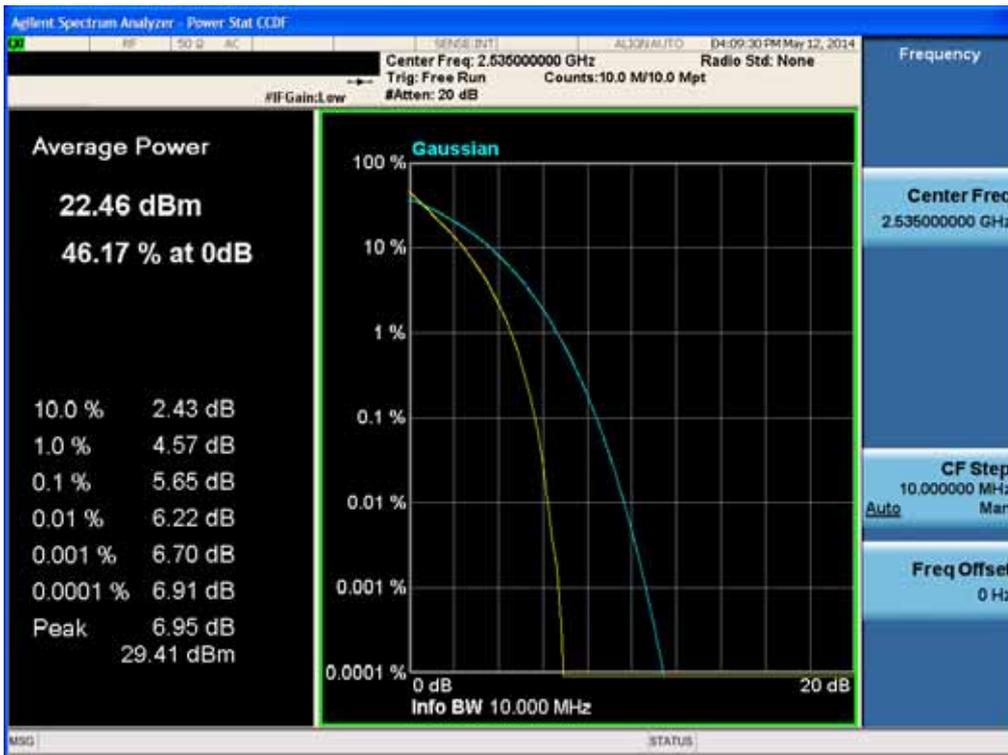


Peak to Average Ratio Plot (10MHz Ch.21100 16-QAM RB 50)




FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---

Peak to Average Ratio Plot (15MHz Ch.21100 QPSK RB 75)

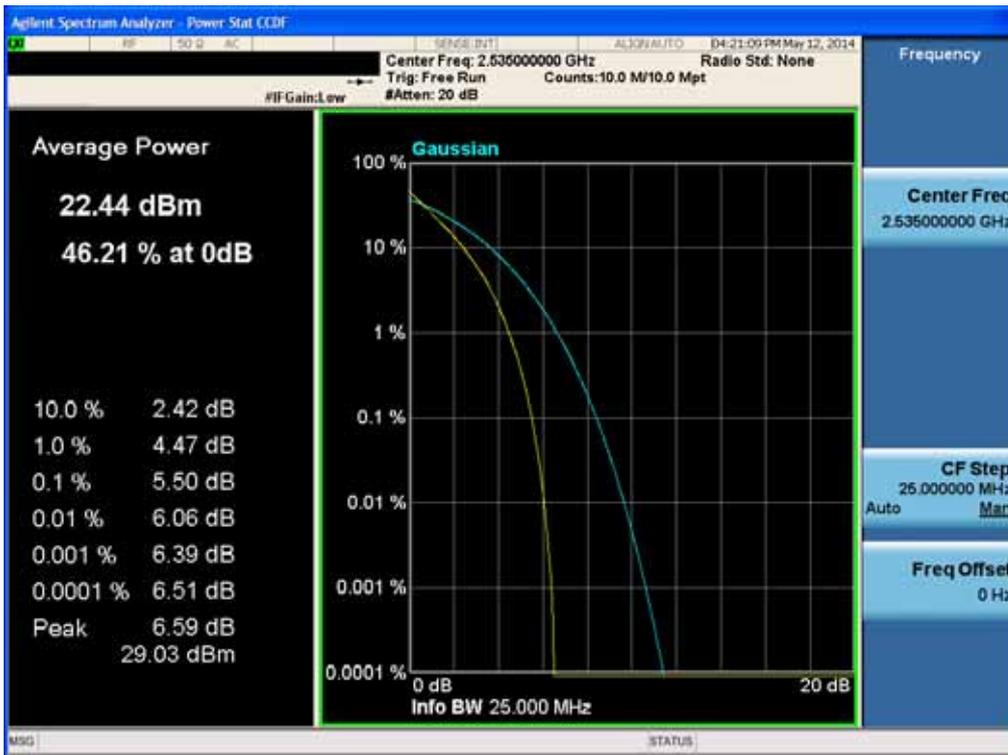


Peak to Average Ratio Plot (15MHz Ch.21100 16-QAM RB 75)

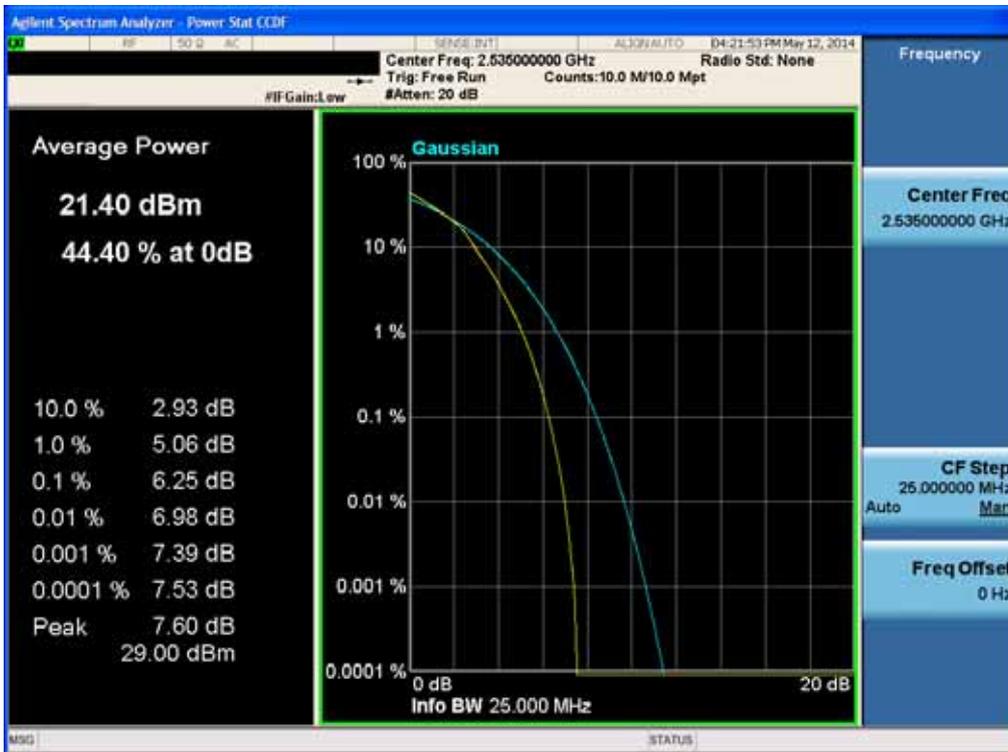


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---

Peak to Average Ratio Plot (20MHz Ch.21100 QPSK RB 100)

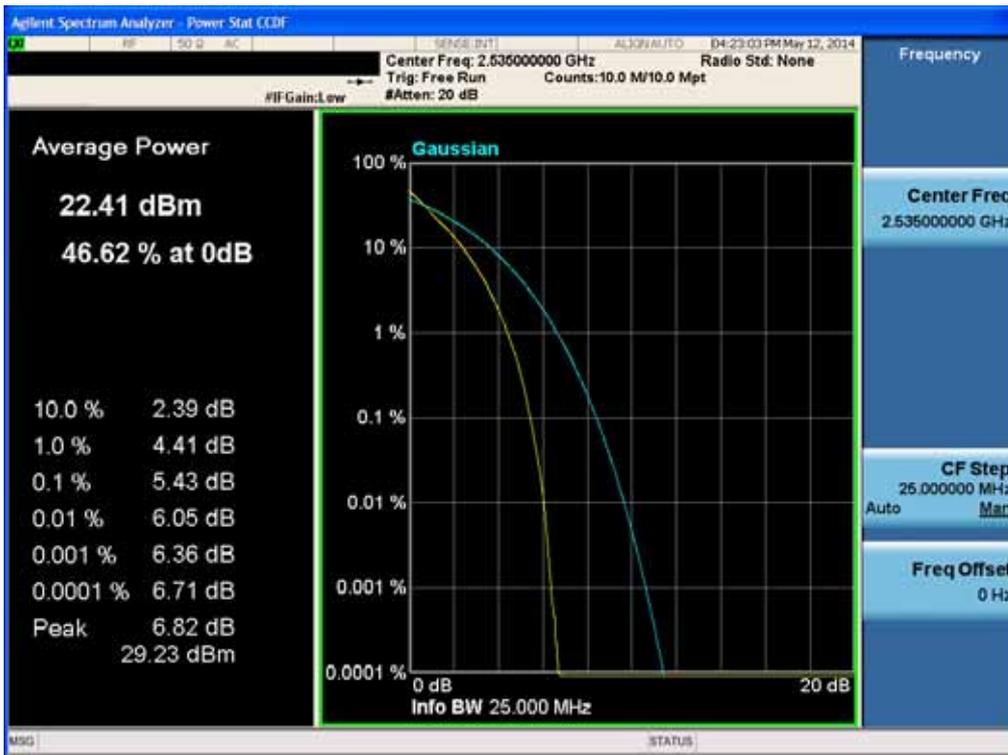


Peak to Average Ratio Plot (20MHz Ch.21100 16-QAM RB 100)

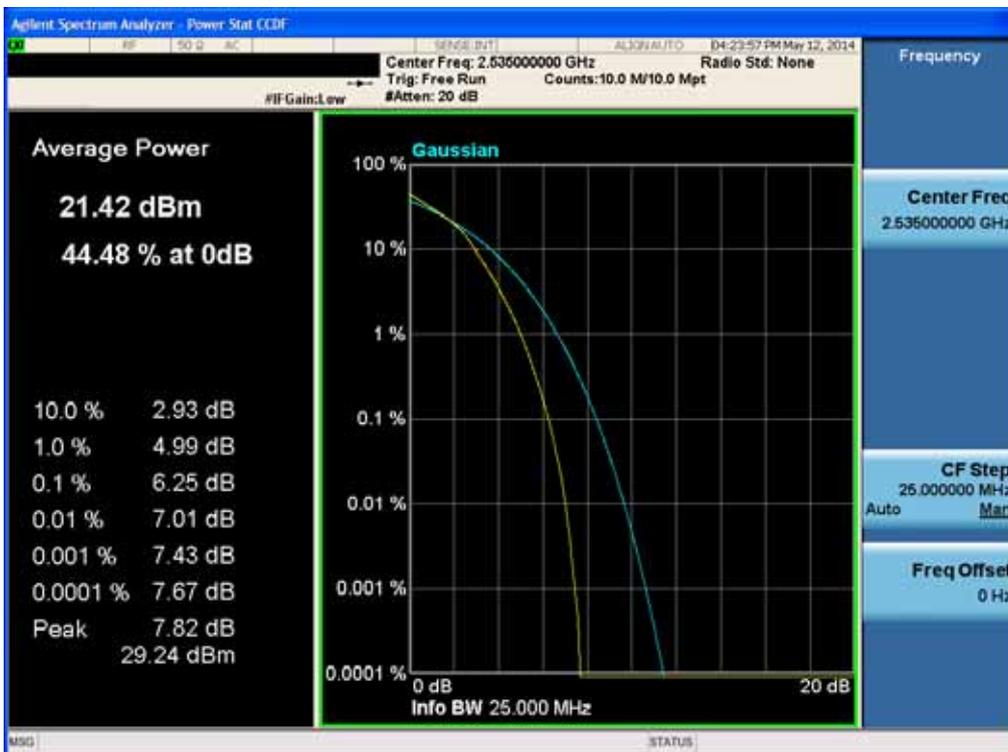


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF855P
--------------------------------------	--------------------------------	---	--

Low Channel Edge Plot (5MHz Ch.20775 QPSK RB 25)

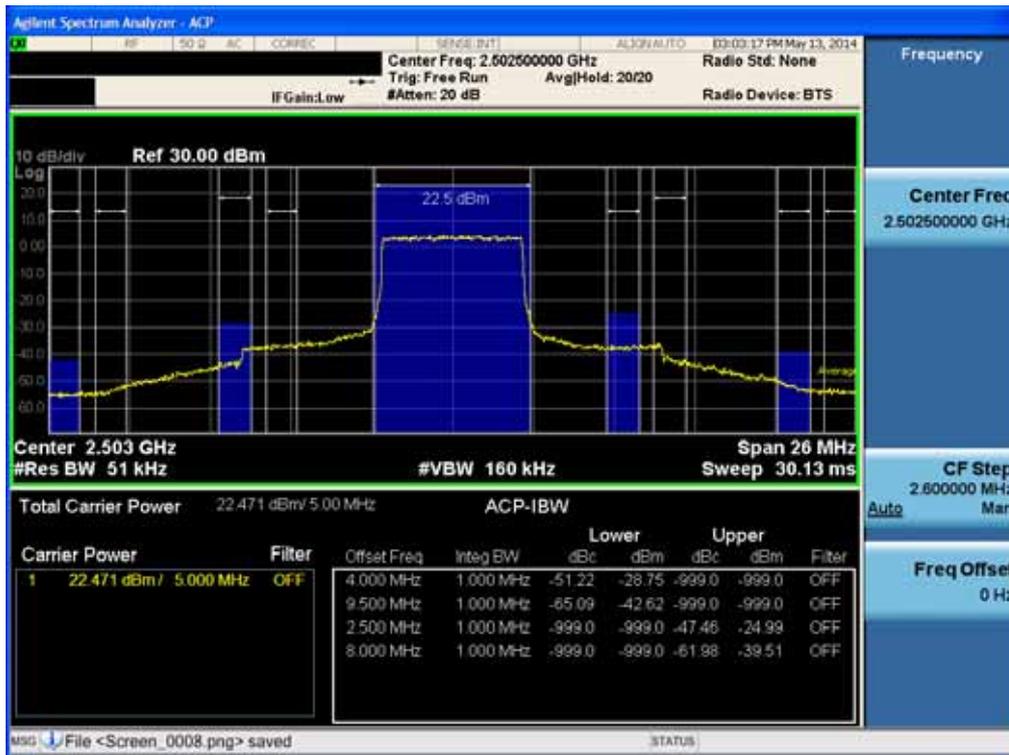


Mid Channel Edge Plot (5MHz Ch.21100 QPSK RB 25)

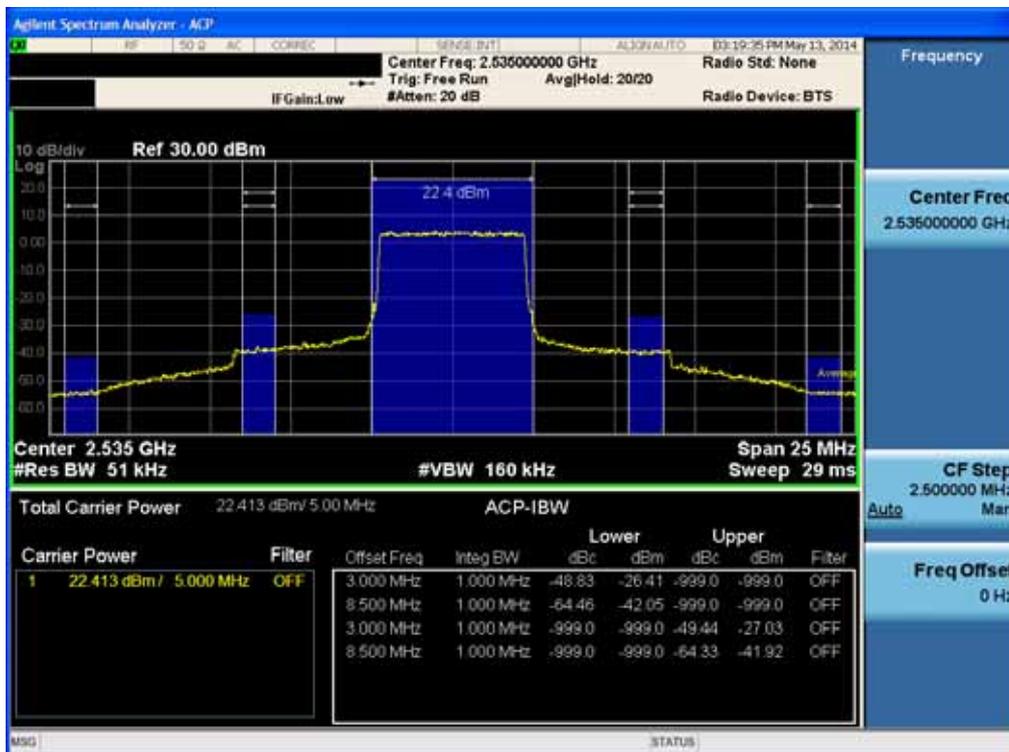


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---

High Channel Edge Plot (5MHz Ch.21425 QPSK RB 25)

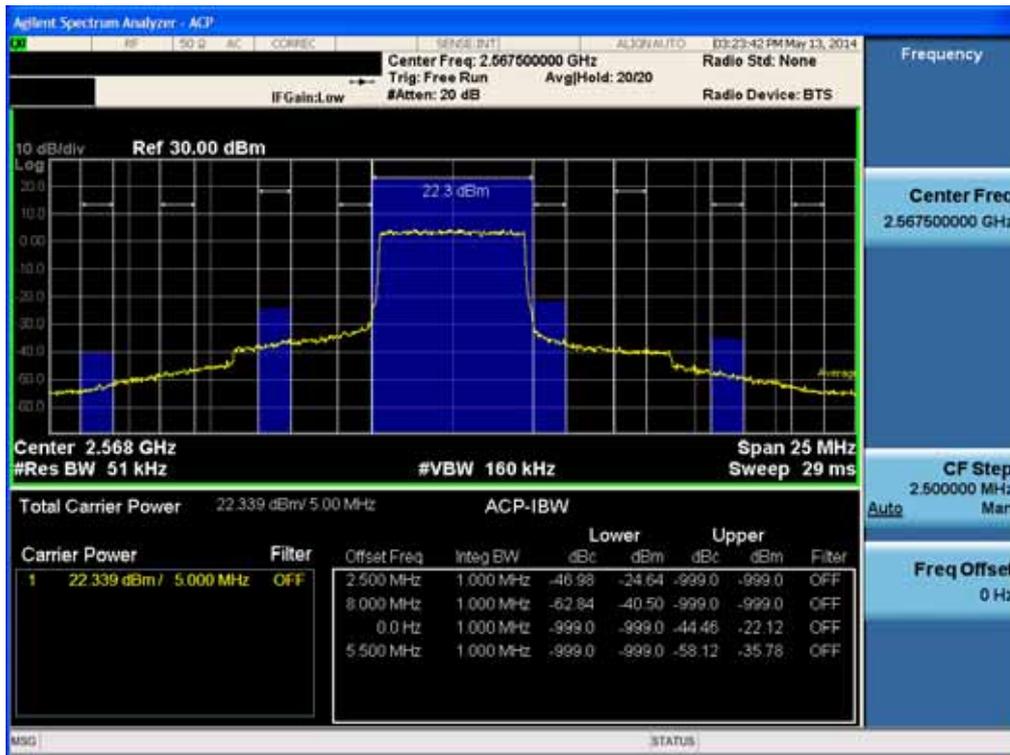


Low Channel Edge Plot (10MHz Ch.20800 QPSK RB 50)

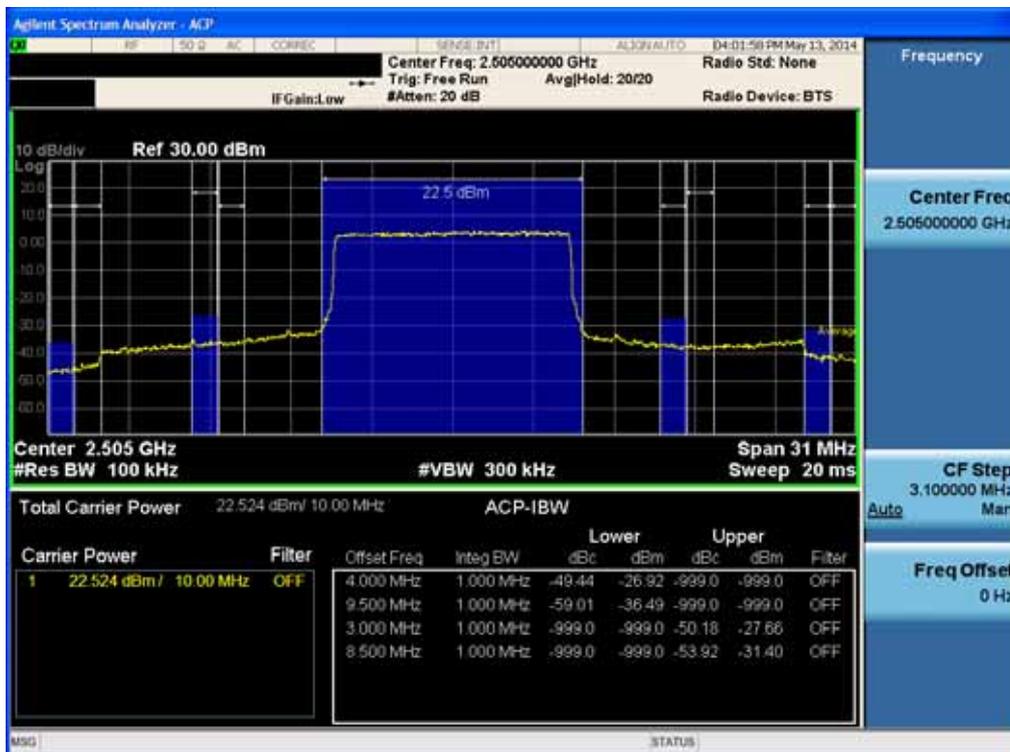


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---

Mid Channel Edge Plot (10MHz Ch.21100 QPSK RB 50)

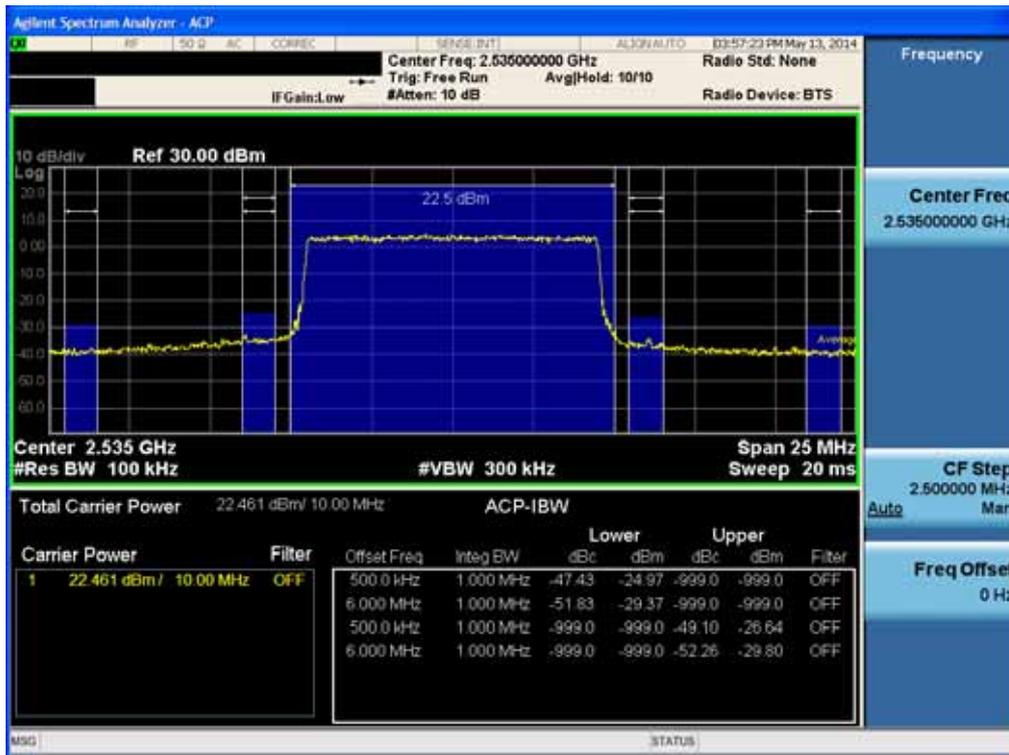


High Channel Edge Plot (10MHz Ch.21400 QPSK RB 50)

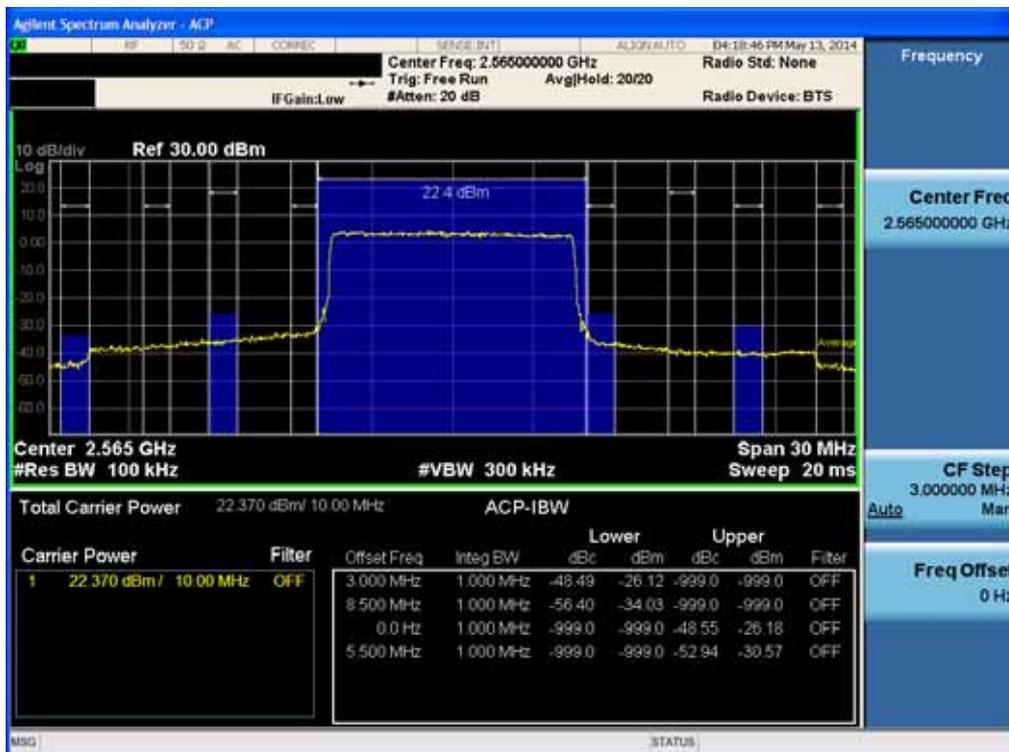


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---

Low Channel Edge Plot (15MHz Ch.20825 QPSK RB 75)

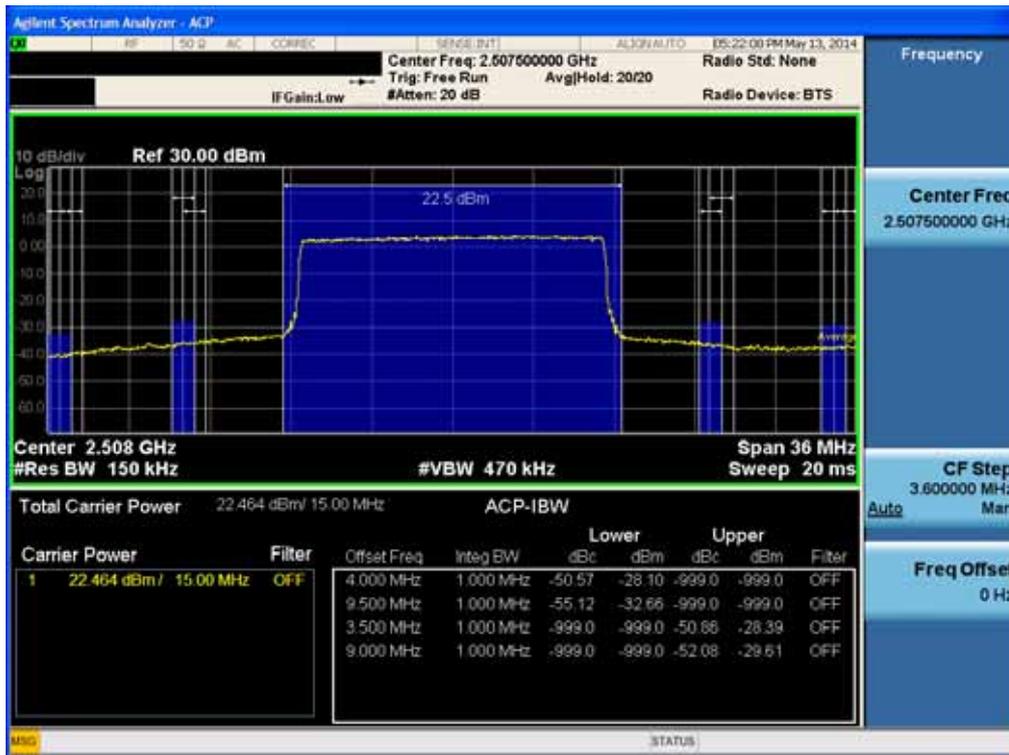

Mid Channel Edge Plot (15MHz Ch.21100 QPSK RB 75)

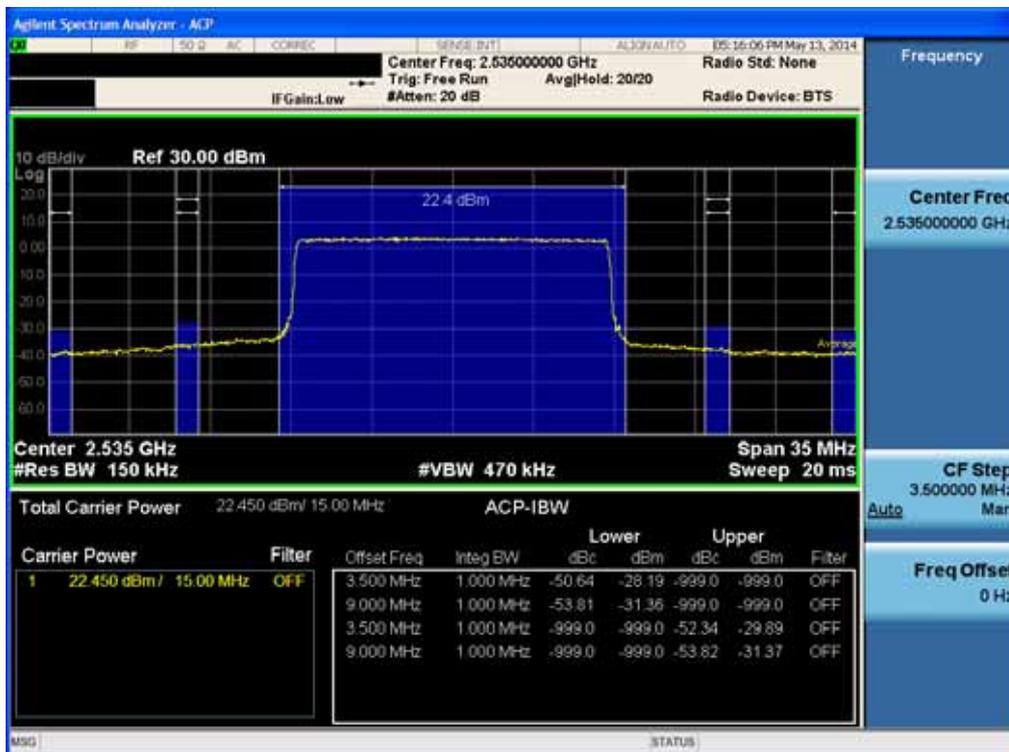


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---

High Channel Edge Plot (15MHz Ch.21375 QPSK RB 75)




Low Channel Edge Plot (20MHz Ch.20850 QPSK RB 100)

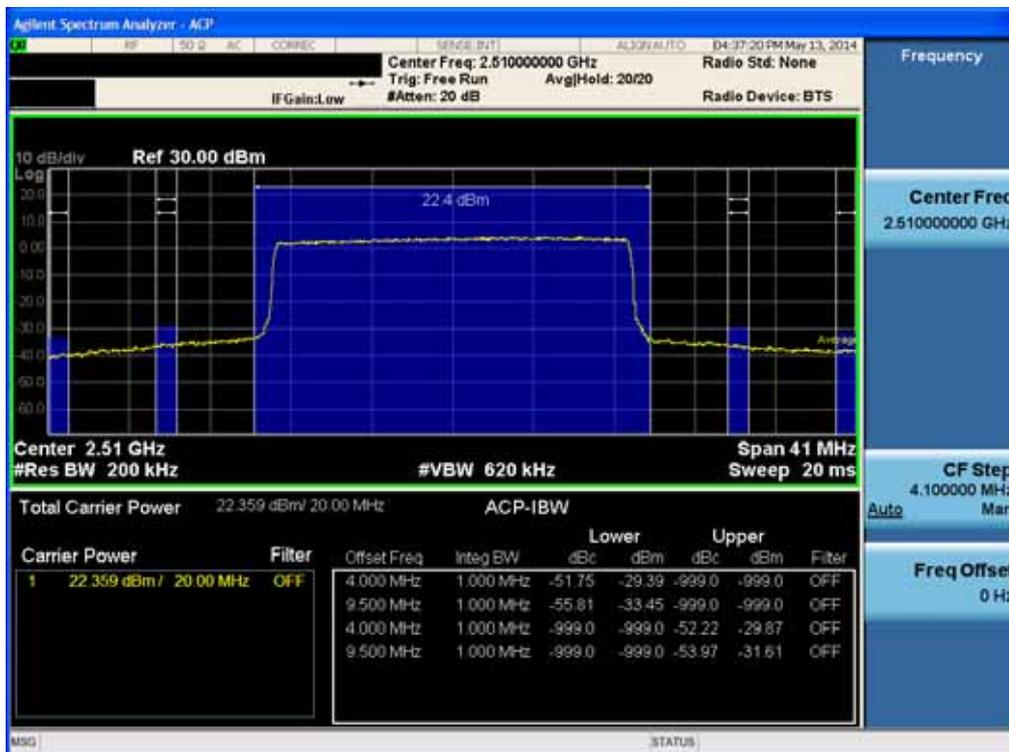


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---

Mid Channel Edge Plot (20MHz Ch.21100 QPSK RB 100)

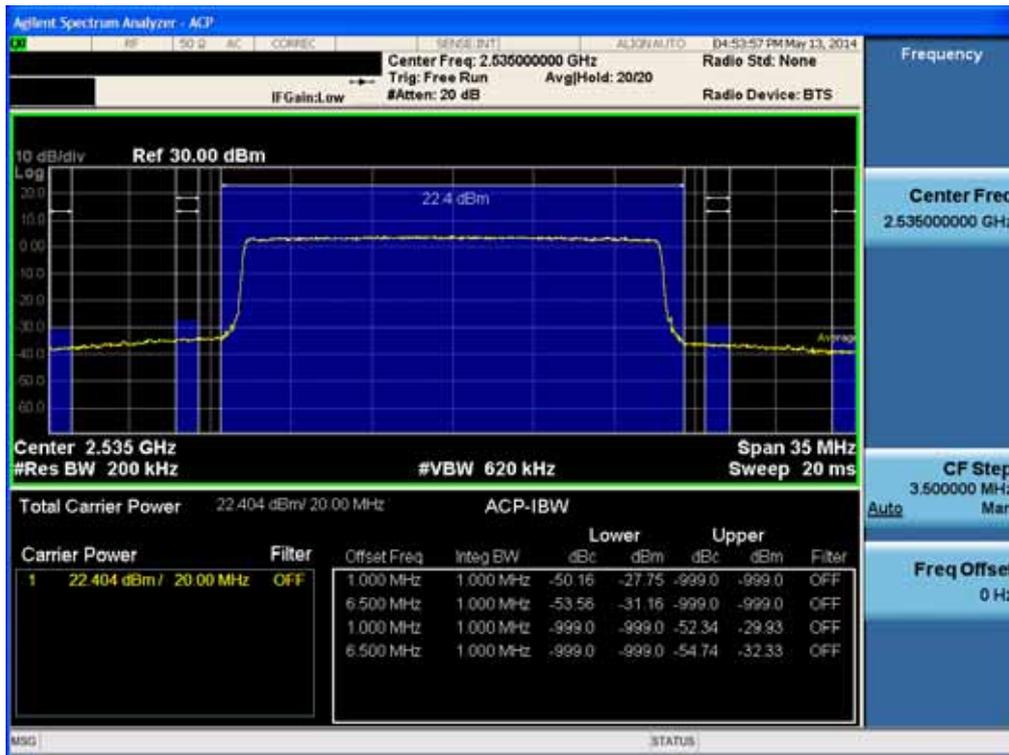

High Channel Edge Plot (20MHz Ch.21350 QPSK RB 100)

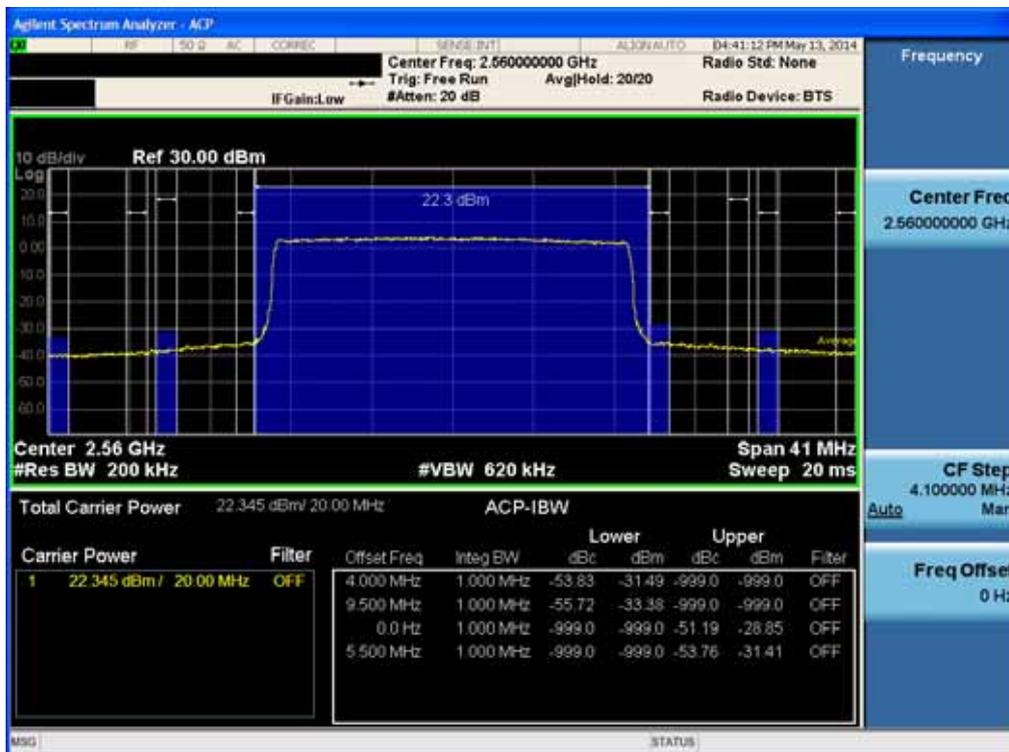


FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---

Conducted Spurious Plot 1 (5MHz Ch.20775 QPSK RB 1, Offset 0)




Conducted Spurious Plot 2 (5MHz Ch.20775 QPSK RB 1, Offset 0)

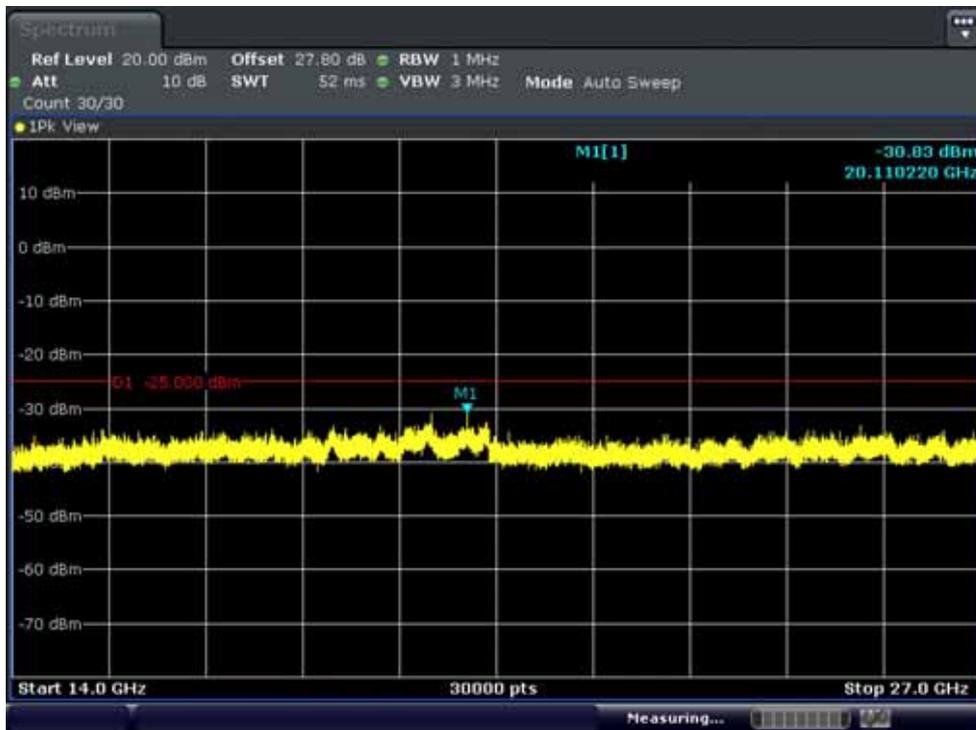

FCC CERTIFICATION REPORT

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P

Conducted Spurious Plot 1 (5MHz Ch.21100 QPSK RB 1, Offset 0)

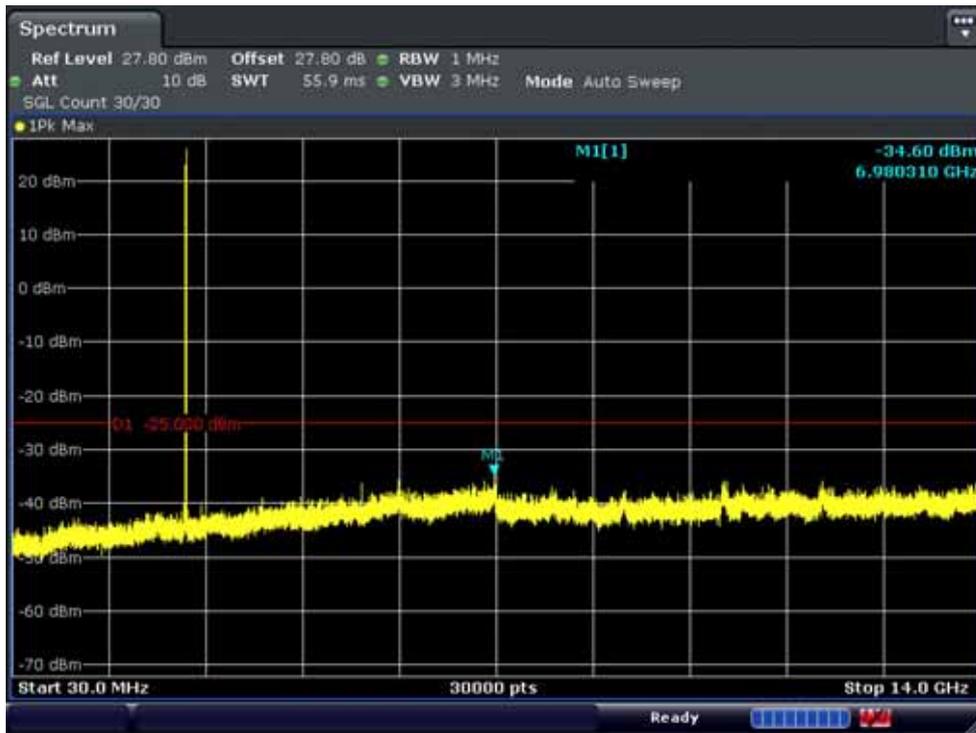

Conducted Spurious Plot 2 (5MHz Ch.21100 QPSK RB 1, Offset 0)




FCC CERTIFICATION REPORT

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P

Conducted Spurious Plot 1 (5MHz Ch.21425 QPSK RB 1, Offset 0)




Conducted Spurious Plot 2 (5MHz Ch.21425 QPSK RB 1, Offset 0)

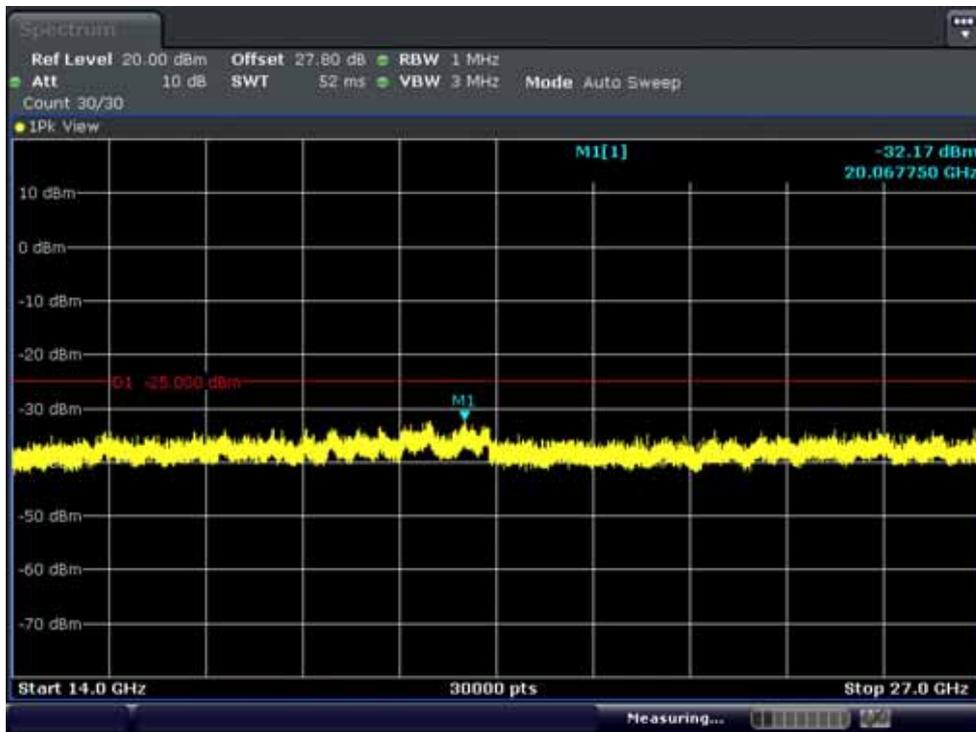

FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF855P
--------------------------------------	--------------------------------	---	--

Conducted Spurious Plot 1 (10MHz Ch.20800 QPSK RB 1, Offset 0)

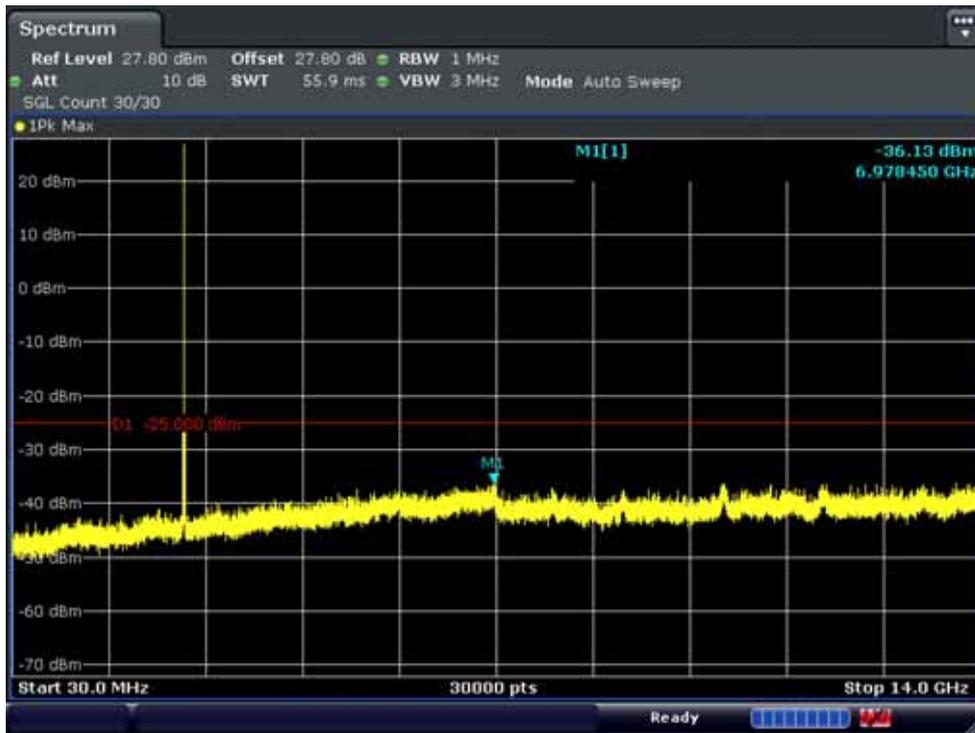


Conducted Spurious Plot 2 (10MHz Ch.20800 QPSK RB 1, Offset 0)



FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF855P
--------------------------------------	--------------------------------	---	--

Conducted Spurious Plot 1 (10MHz Ch.21100 QPSK RB 1, Offset 0)

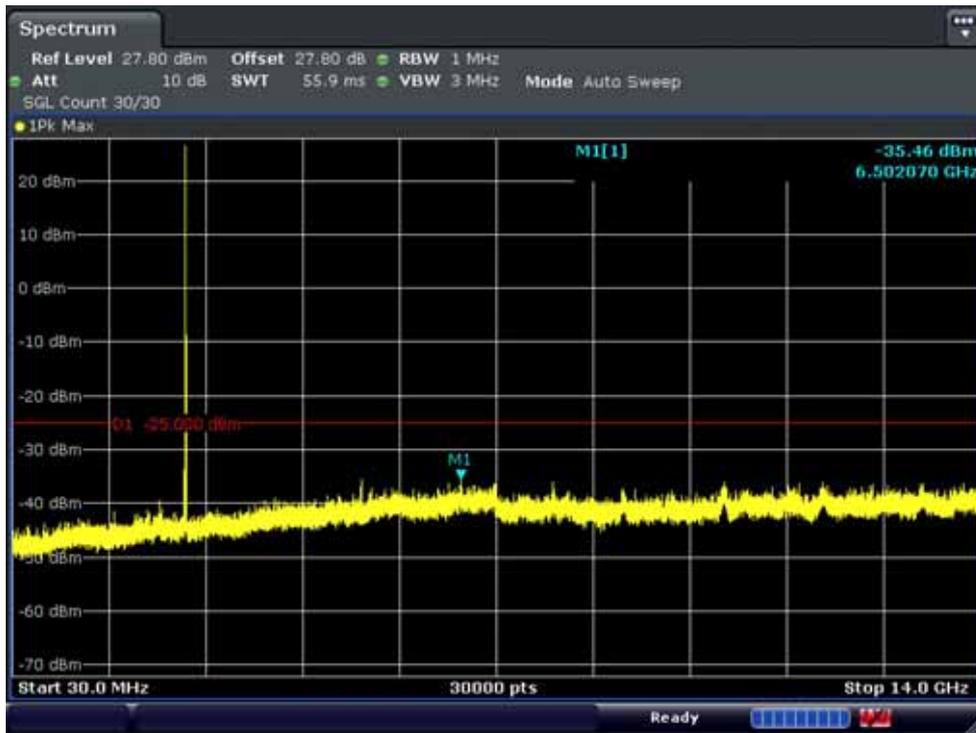


Conducted Spurious Plot 2 (10MHz Ch.21100 QPSK RB 1, Offset 0)



FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---

Conducted Spurious Plot 1 (10MHz Ch.21400 QPSK RB 1, Offset 0)

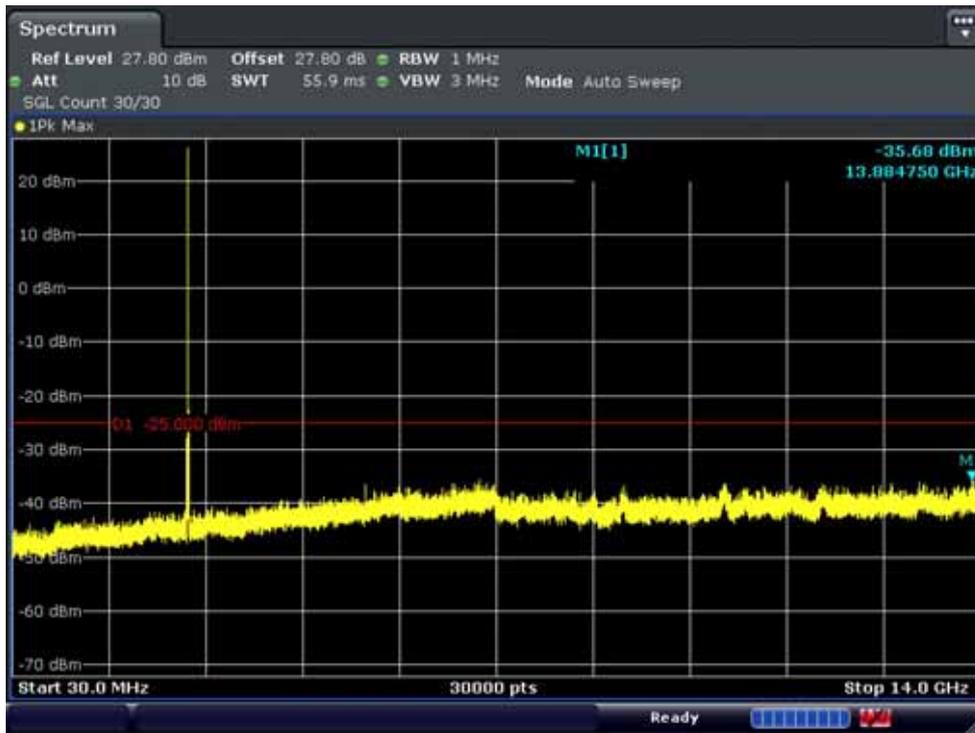


Conducted Spurious Plot 2 (10MHz Ch.21400 QPSK RB 1, Offset 0)



FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---

Conducted Spurious Plot 1 (15MHz Ch.20825 QPSK RB 1, Offset 0)

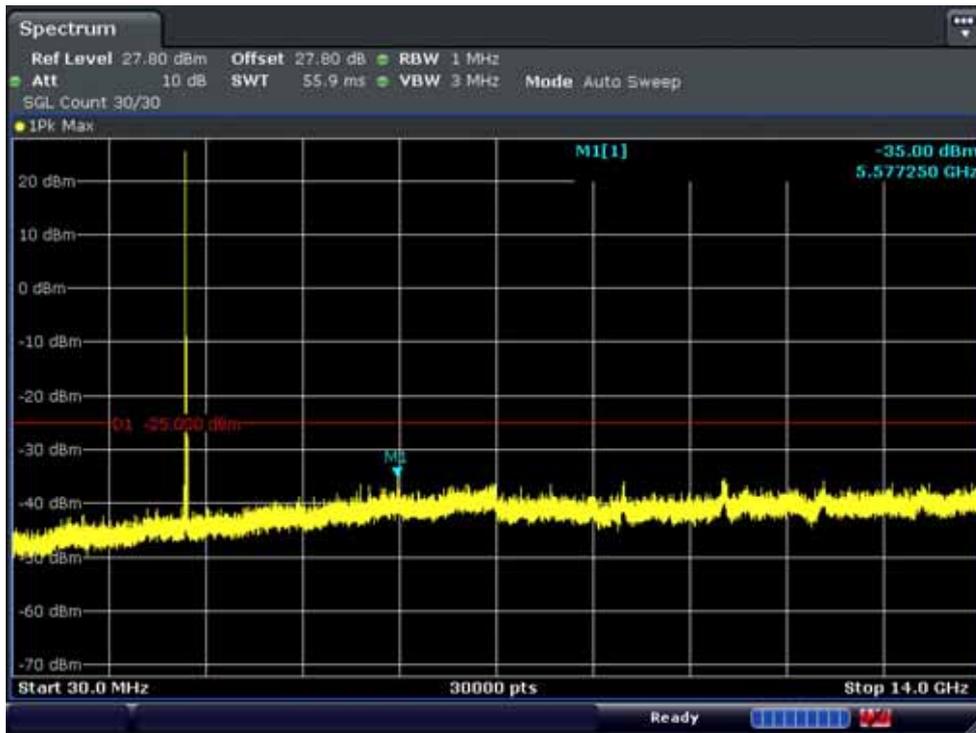


Conducted Spurious Plot 2 (15MHz Ch.20825 QPSK RB 1, Offset 0)



FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

Conducted Spurious Plot 1 (15MHz Ch.21100 QPSK RB 1, Offset 0)

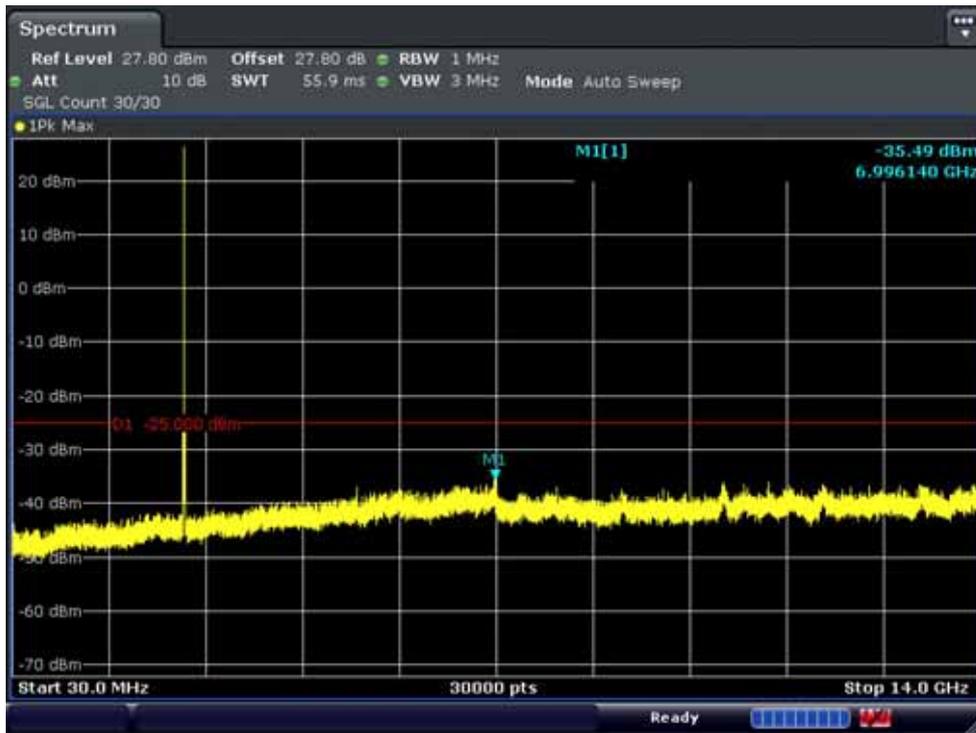

Conducted Spurious Plot 2 (15MHz Ch.21100 QPSK RB 1, Offset 0)



FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNF0855P
--------------------------------------	--------------------------------	---	---

Conducted Spurious Plot 1 (15MHz Ch.21375 QPSK RB 1, Offset 0)




Conducted Spurious Plot 2 (15MHz Ch.21375 QPSK RB 1, Offset 0)



FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

Conducted Spurious Plot 1 (20MHz Ch.20850 QPSK RB 1, Offset 0)

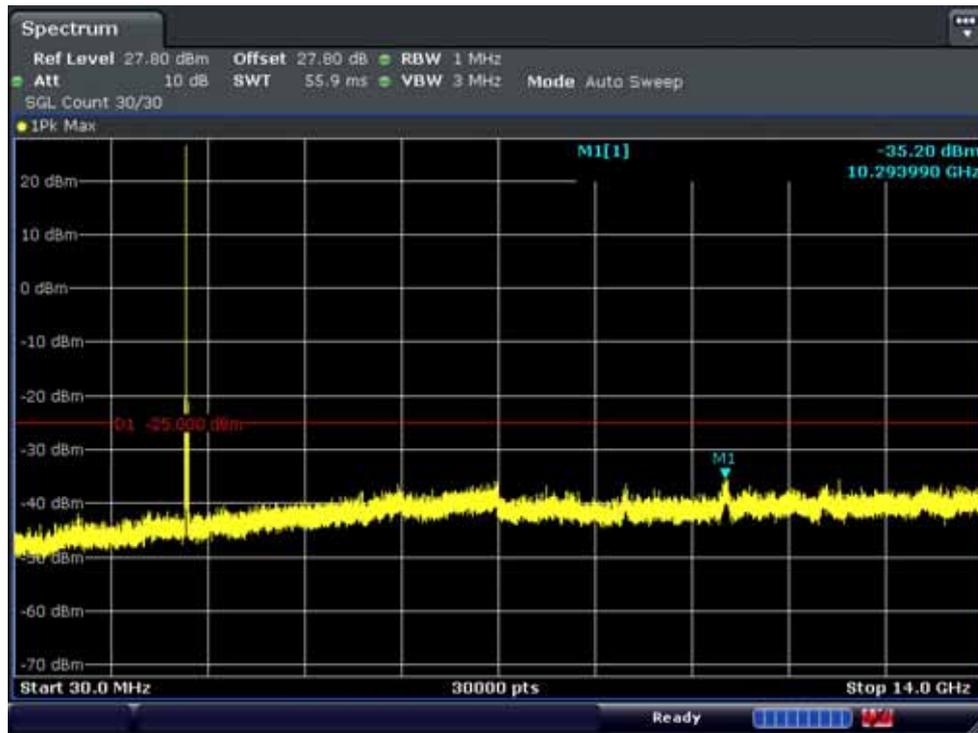

Conducted Spurious Plot 2 (20MHz Ch.20850 QPSK RB 1, Offset 0)



FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

Conducted Spurious Plot 1 (20MHz Ch.21100 QPSK RB 1, Offset 0)




Conducted Spurious Plot 2 (20MHz Ch.21100 QPSK RB 1, Offset 0)



FCC CERTIFICATION REPORT

Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	www.hct.co.kr FCC ID: ZNFD855P
--------------------------------------	--------------------------------	---	---

Conducted Spurious Plot 1 (20MHz Ch.21350 QPSK RB 1, Offset 0)

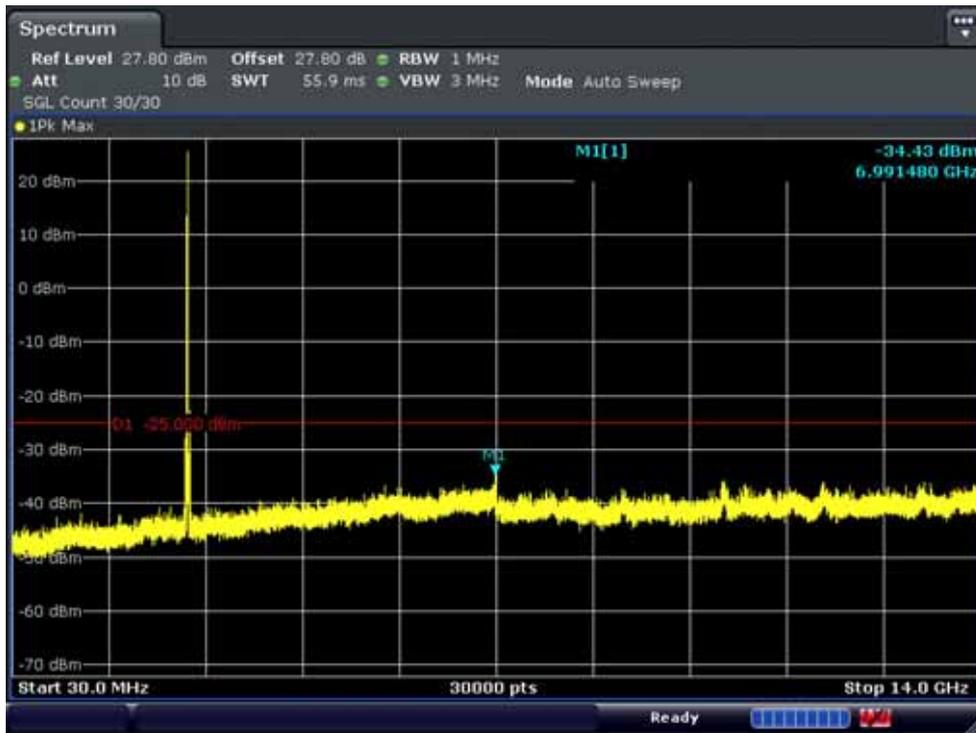

Conducted Spurious Plot 2 (20MHz Ch.21350 QPSK RB 1, Offset 0)



FCC CERTIFICATION REPORT

FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F013-2	Date of Issue: May 30, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P