



HCT CO., LTD.

CERTIFICATE OF COMPLIANCE FCC Certification

Applicant Name: LG Electronics MobileComm U.S.A., Inc.	Date of Issue: May 29, 2014
Address: 1000 Sylvan Avenue, Englewood Cliffs NJ 07632	Test Site/Location: HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea
	Report No.: HCT-R-1405-F015-1
	HCT FRN: 0005866421

FCC ID	: ZNFD855P
APPLICANT	: LG Electronics MobileComm U.S.A., Inc.

FCC Model(s):	LG-D855P
Additional FCC Model(s):	LG-D855p, D855P, D855p, LGD855P, LGD855p, LG-D855AR, LG-D855ar, LGD855AR, LGD855ar, D855AR, D855ar
EUT Type:	Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC
Max. RF Output Power:	5.92 dBm (3.91 mW)
Frequency Range:	2402 MHz - 2480 MHz (Bluetooth)
Modulation type	GFSK(Normal), $\pi/4$ DQPSK and 8DPSK(EDR)
FCC Classification:	FCC Part 15 Spread Spectrum Transmitter
FCC Rule Part(s):	Part 15 subpart C 15.247

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

Report prepared by
: Kyoung Houn Seo
Test engineer of RF Team

Approved by
: Chang Seok Choi
Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNFD855P



Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1405-F015	May 21, 2014	- First Approval Report
HCT-R-1405-F015-1	May 29, 2014	- Add the include details identifying WCP on page 5 - Revised the calibration note Section 9.1

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNFD855P

Table of Contents

1.	GENERAL INFORMATION	4
2.	EUT DESCRIPTION	5
3.	TEST METHODOLOGY	6
3.1	EUT CONFIGURATION	6
3.2	EUT EXERCISE	6
3.3	GENERAL TEST PROCEDURES	6
3.4	DESCRIPTION OF TEST MODES	7
4.	INSTRUMENT CALIBRATION	7
5.	FACILITIES AND ACCREDITATIONS	7
5.1	FACILITIES	7
5.2	EQUIPMENT	7
6.	ANTENNA REQUIREMENTS.....	7
7.	SUMMARY OF TEST RESULTS.....	8
8.	FCC PART 15.247 REQUIREMENTS	9
8.1	PEAK POWER	9
8.2	BAND EDGES.....	16
8.3	FREQUENCY SEPARATION / OCCUPIED BANDWIDTH (99% BW)	24
8.4	NUMBER OF HOPPING FREQUENCY	33
8.5	TIME OF OCCUPANCY (DWELL TIME).....	37
8.6	SPURIOUS EMISSIONS.....	44
8.6.1	CONDUCTED SPURIOUS EMISSIONS	44
8.6.2	RADIATED SPURIOUS EMISSIONS	53
8.6.3	RADIATED RESTRICTED BAND EDGES	70
8.7	POWERLINE CONDUCTED EMISSIONS.....	75
9.	LIST OF TEST EQUIPMENT.....	84
9.1	LIST OF TEST EQUIPMENT(Conducted Test)	84
9.2	LIST OF TEST EQUIPMENT(Radiated Test)	85



1. GENERAL INFORMATION

Applicant: LG Electronics MobileComm U.S.A., Inc.
Address: 1000 Sylvan Avenue, Englewood Cliffs NJ 07632
FCC ID: ZNFD855P
EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC
Model name(s): LG-D855P
Additional Model name(s): LG-D855p, D855P, D855p, LGD855P, LGD855p, LG-D855AR, LG-D855ar, LGD855AR, LGD855ar, D855AR, D855ar
Date(s) of Tests: April 09, 2014 ~ May 19, 2014
Place of Tests: HCT Co., Ltd.
74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea.
(IC Recognition No. : 5944A-3)

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P



2. EUT DESCRIPTION

EUT Type	Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC
FCC Model Name	LG-D855P
Additional FCC Model Name	LG-D855p, D855P, D855p, LGD855P, LGD855p, LG-D855AR, LG-D855ar, LGD855AR, LGD855ar, D855AR, D855ar
Power Supply	DC 3.8 V
Battery type	Li-ion Battery(Standard)
Frequency Range	2402 MHz - 2480 MHz (Bluetooth)
Transmit Power	5.92 dBm (3.91 mW)
BT Operating Mode	Normal, EDR, AFH
Modulation Type	GFSK(Normal), $\pi/4$ DQPSK and 8DPSK(EDR)
Modulation Technique	FHSS
Number of Channels	79Channels, Minimum 20 Channels(AFH)
Antenna Specification	Manufacturer: AT&C Co.LTD. Antenna type: FPCB Antenna Peak Gain : -3.09 dBi
Wireless Charger Pad	FCC ID: BEJWCP300 Manufacturer: LG Electronics USA

Note: All test performed with the battery cover already incorporate the NFC antenna and Wireless charging capability.

15.247 Requirements for Bluetooth transmitter

- This Bluetooth module has been tested by a Bluetooth Qualification Lab, and we confirm the following:
 - 1) This system is hopping pseudo-randomly.
 - 2) Each frequency is used equally on the average by each transmitter.
 - 3) The receiver input bandwidths that match the hopping channel bandwidths of their corresponding transmitters
 - 4) The receiver shifts frequencies in synchronization with the transmitted signals.
- 15.247(g): The system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this Section 15.247 should the transmitter be presented with a continuous data (or information) stream.
- 15.247(h): The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNF855P



3. TEST METHODOLOGY

The measurement procedure described in the American National Standard for Testing Unlicensed Wireless Devices(ANSI C63.4-2003) and FCC Public Notice DA 00-705 dated March 30, 2000 entitled “Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems” were used in the measurement of the **LG Electronics MobileComm U.S.A., Inc. Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC FCC ID: ZNFD855P**

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version :2003) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version: 2003). To record the final measurements, the analyzer detector function was set to CISPR quasi-peak mode and the bandwidth of the spectrum analyzer was set to 120 kHz for frequencies below 1 GHz or 1 MHz for frequencies above 1 GHz. For average measurements above 1 GHz, the analyzer was set to peak detector with a reduced VBW setting(RBW = 1 MHz, VBW = 1/T Hz, where T = Pulse width).

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P	



Conducted Antenna Terminal

See Section from 8.1 to 8.6.1.(DA 00-705)

3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2003) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated February 28, 2014 (Registration Number: 90661)

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antennas of this E.U.T are permanently attached.

*The E.U.T Complies with the requirement of §15.203

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE	Phone with	FCC ID: ZNFD855P

7. SUMMARY OF TEST RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
20 dB Bandwidth	§15.247(a)(1)(ii) or (iii)	NA	CONDUCTED	PASS
Occupied Bandwidth	NA	NA		NA
Conducted Maximum Peak Output Power	§15.247(b)(1)	< 1 Watts for 1Mbps < 125 Milliwatts for 2, 3Mbps		PASS
Carrier Frequency Separation	§15.247(a)(1)	>25 kHz or >2/3 of the 20dB BW		PASS
Number of Hopping Frequencies	§15.247(a)(1)(iii)	>15		PASS
Time of Occupancy	§15.247(a)(1)(iii)	<400 ms		PASS
Conducted Spurious Emissions	§15.247(d)	> 20 dB for all out-of band emissions		PASS
Band Edge(Out of Band Emissions)	§15.247(d)	> 20 dB for all out-of band emissions		PASS
AC Power line Conducted Emissions	§15.207(a)	cf. Section 8.7		PASS
Radiated Spurious Emissions	§15.247(d), 15.205, 15.209	cf. Section 8.6.2	RADIATED	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 8.6.3		PASS

8. FCC PART 15.247 REQUIREMENTS


8.1 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 W for hopping mode, 125 mW for AFH mode
2. The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi.

Test Configuration

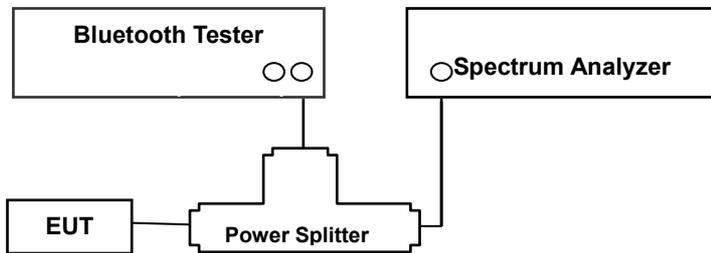

TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. The Spectrum Analyzer is set to the peak detector mode. This test is performed with hopping off.

The Spectrum Analyzer is set to (DA 00-705)

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW ≥ RBW

Sweep = Auto

Detector = Peak

Trace = Max hold

SAMPLE CALCULATION

$$\begin{aligned} \text{Output Power} &= \text{Spectrum Reading Power} + \text{Power Splitter loss} + \text{Cable loss}(2 \text{ ea}) \\ &= 10 \text{ dBm} + 6 \text{ dB} + 1.5 \text{ dB} = 17.5 \text{ dBm} \end{aligned}$$

Note :

1. Spectrum reading values are not plot data. The power results in plot is already including the actual values of loss for the splitter and cable combination.
2. Spectrum offset = Power Splitter loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. Actual value of

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNFD855P



loss for the splitter and cable combination is 7.18 dB at 2402 MHz and is 7.23 dB at 2480 MHz.

So, 7.2 dB is offset. And the offset gap in the 2.4 GHz range do not affect the conducted peak power final result

TEST RESULTS

No non-compliance noted

Test Data

Channel	Frequency (MHz)	Output Power (GFSK)		Limit (mW)	Result
		(dBm)	(mW)		
Low	2402	3.45	2.21	125	PASS
Mid	2441	5.50	3.55		PASS
High	2480	4.13	2.59		PASS


Channel	Frequency (MHz)	Output Power (8DPSK)		Output Power ($\pi/4$ DQPSK)		Limit (mW)	Result
		(dBm)	(mW)	(dBm)	(mW)		
Low	2402	3.93	2.47	3.58	2.28	125	PASS
Mid	2441	5.92	3.91	5.57	3.61		PASS
High	2480	4.59	2.88	4.22	2.64		PASS



Test Plots (GFSK)
Peak Power (Low-CH)




Test Plots (GFSK)
Peak Power (Mid-CH)

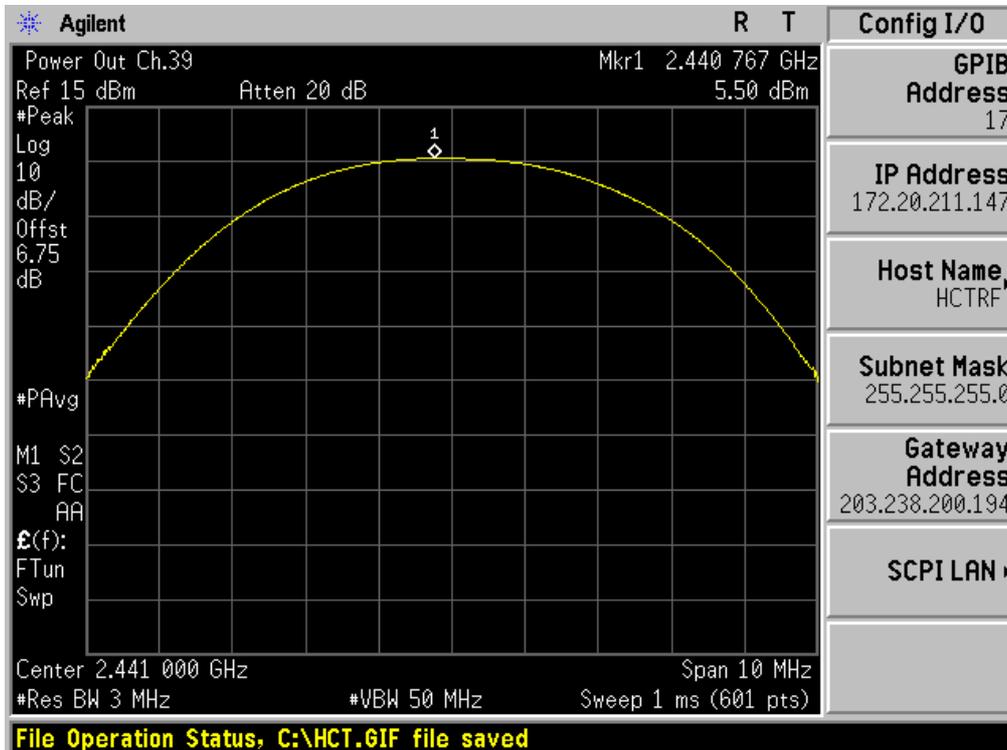


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNFD855P



Test Plots (GFSK)
Peak Power (High-CH)

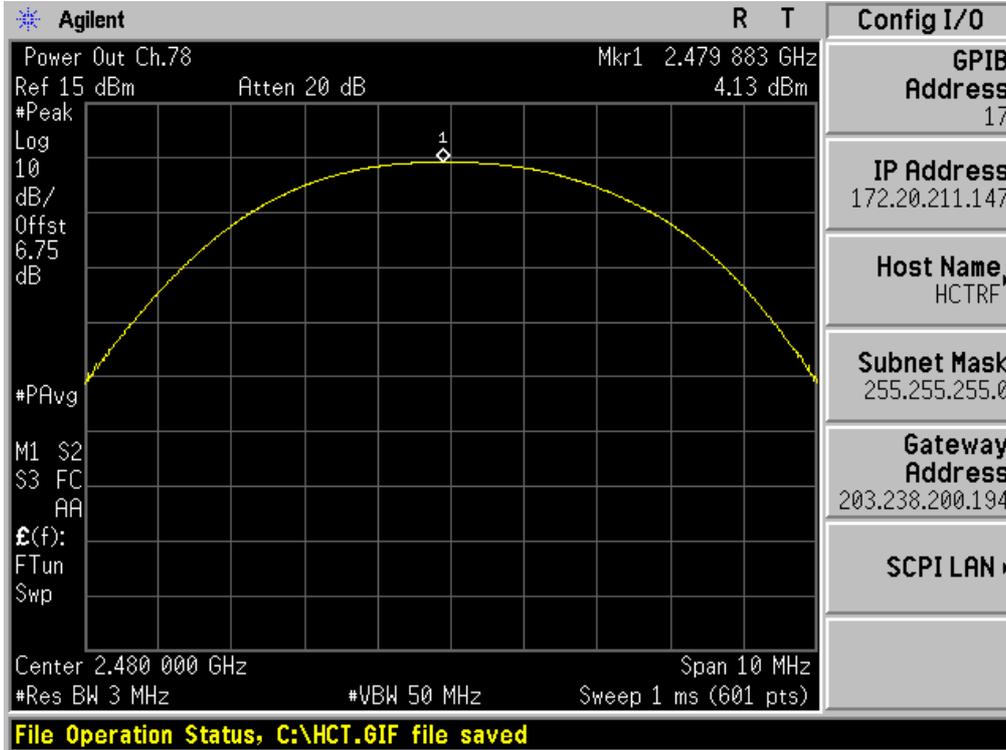


Test Plots (8DPSK)
Peak Power (Low-CH)

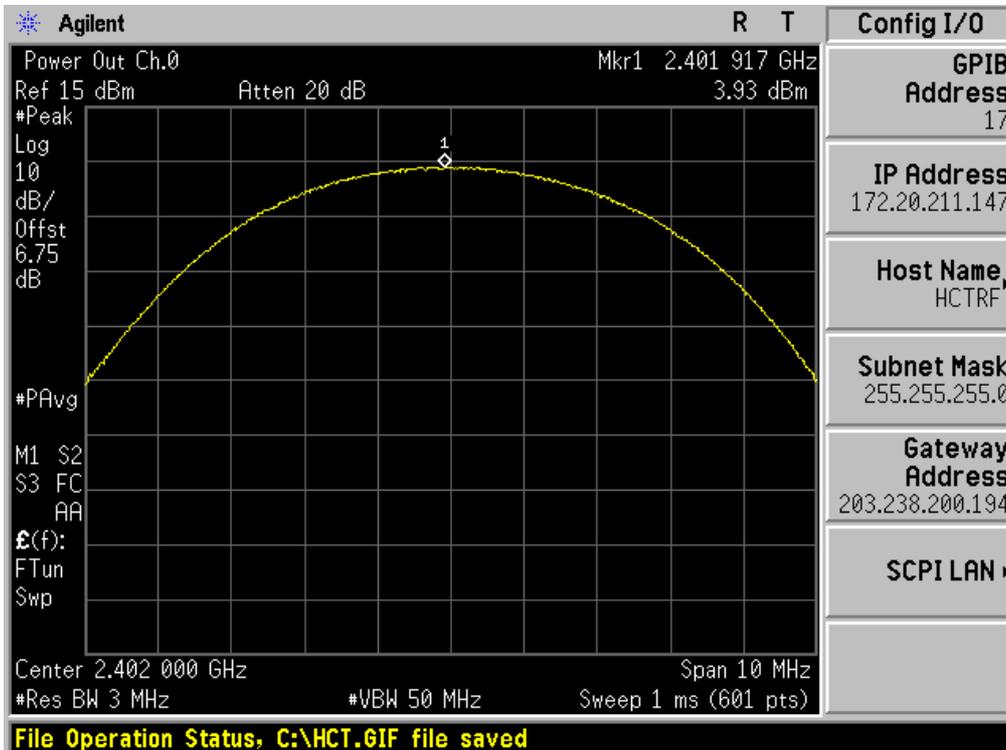


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNFD855P



Test Plots (8DPSK)
Peak Power (Mid-CH)

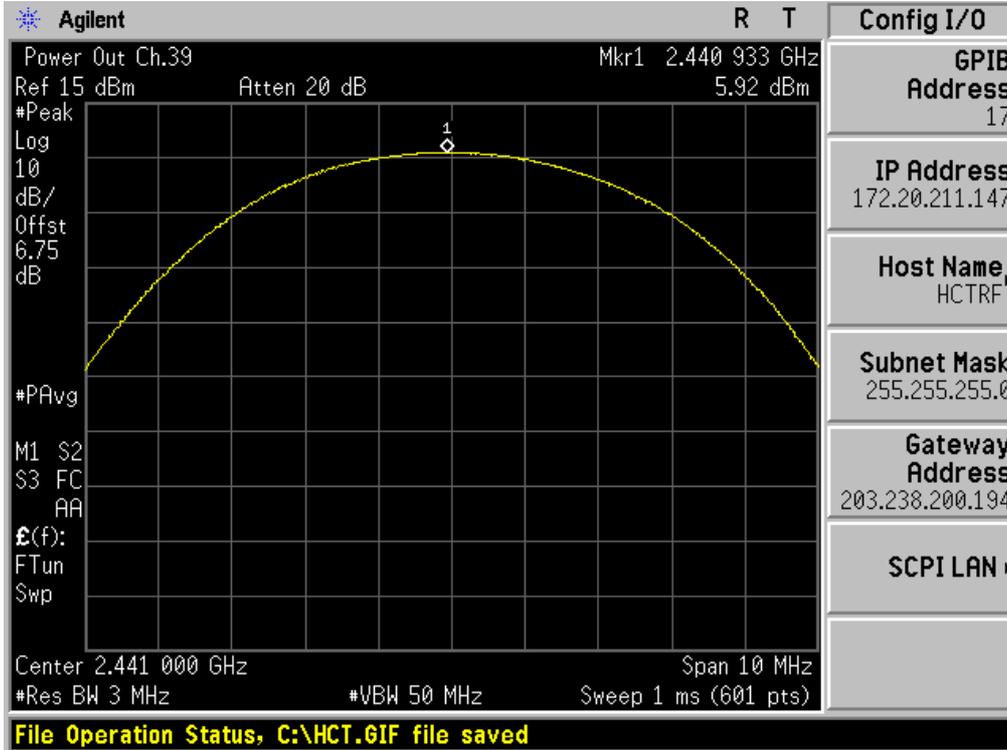


Test Plots (8DPSK)
Peak Power (High-CH)

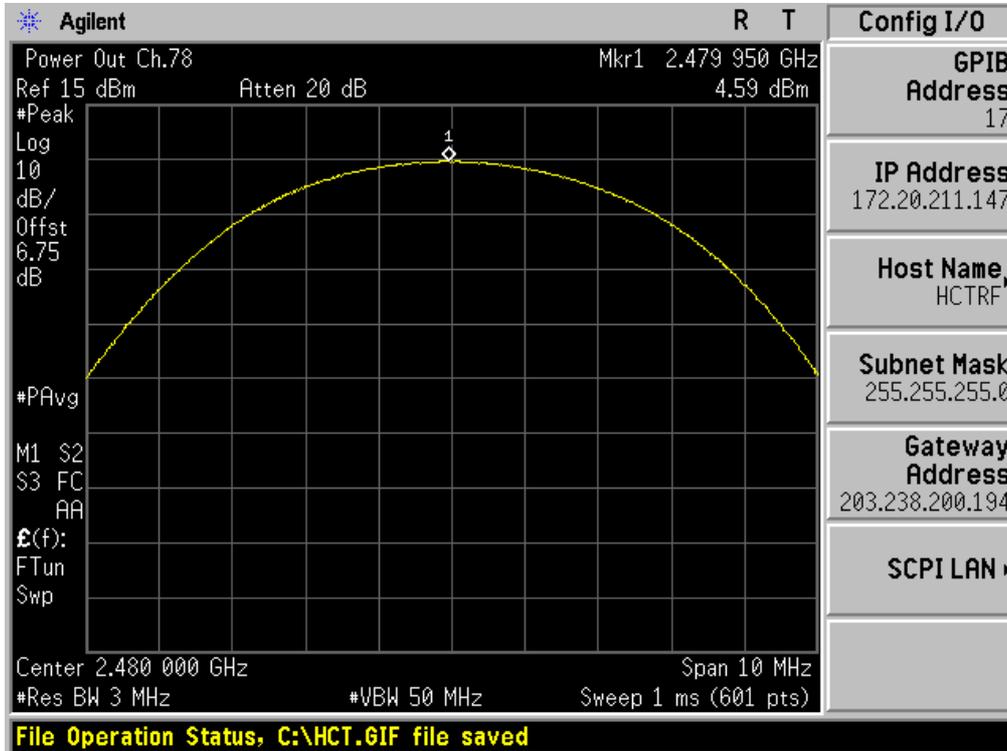


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNFD855P



Test Plots ($\pi/4$ DQPSK)
Peak Power (Low-CH)

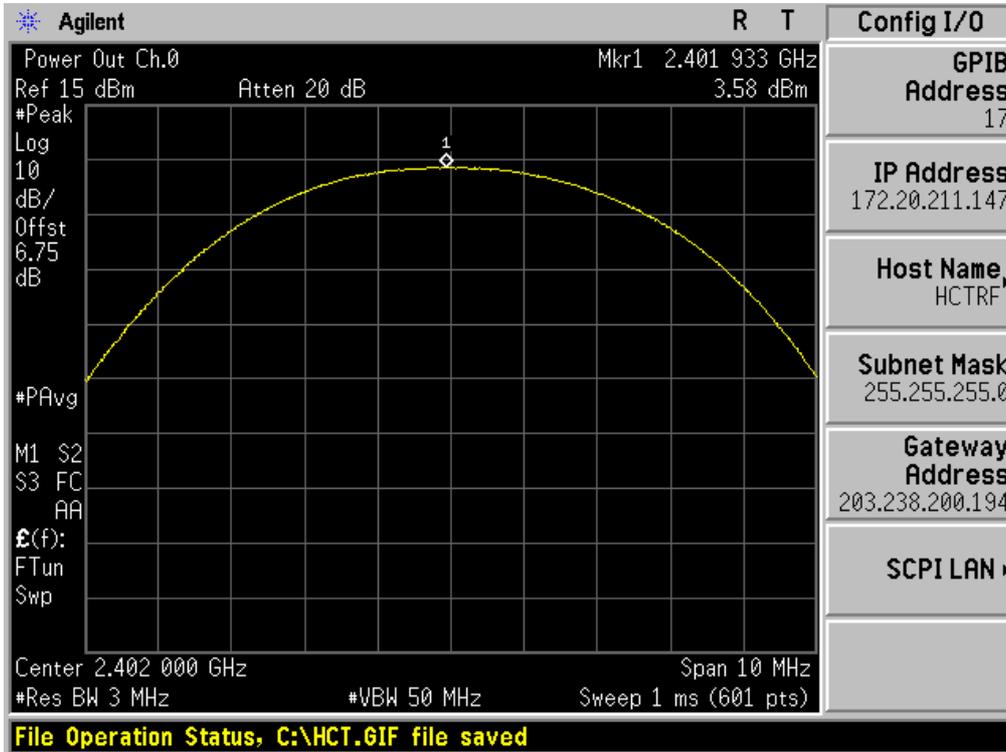


Test Plots ($\pi/4$ DQPSK)
Peak Power (Mid-CH)

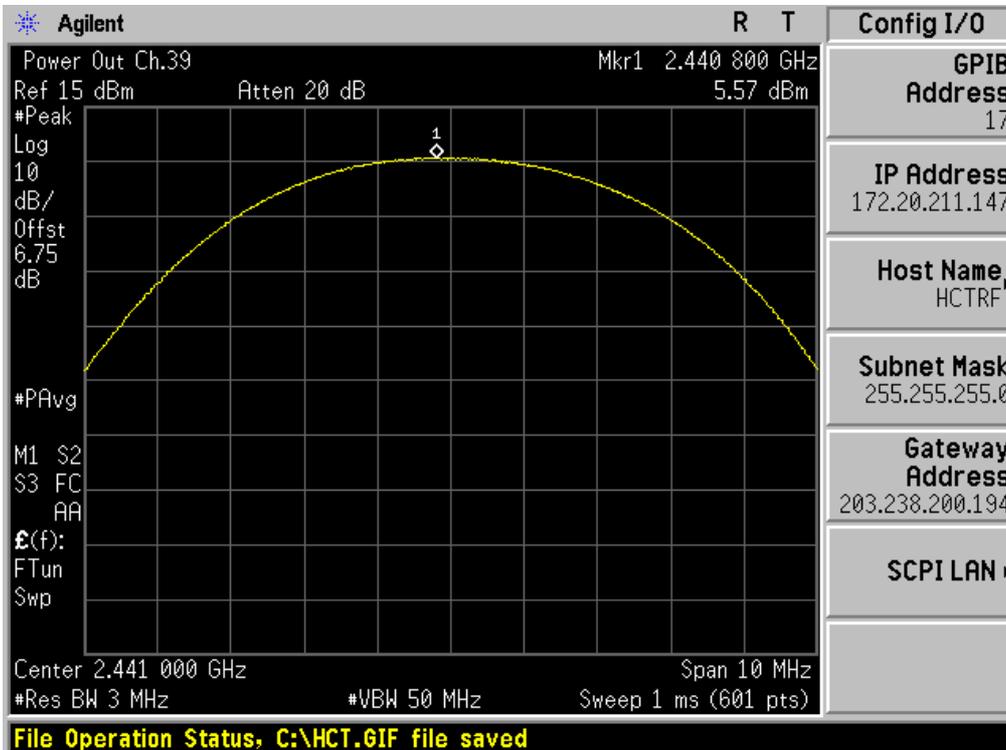

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNFD855P



Test Plots ($\pi/4$ DQPSK)
Peak Power (High-CH)

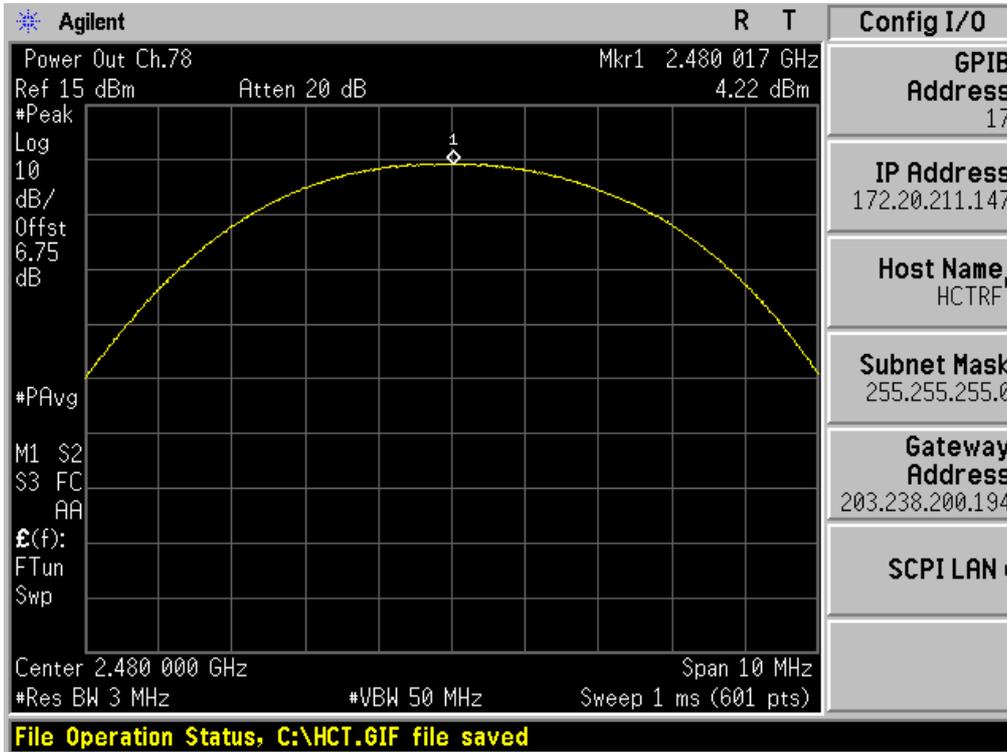


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNFD855P

8.2 BAND EDGES

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Configuration

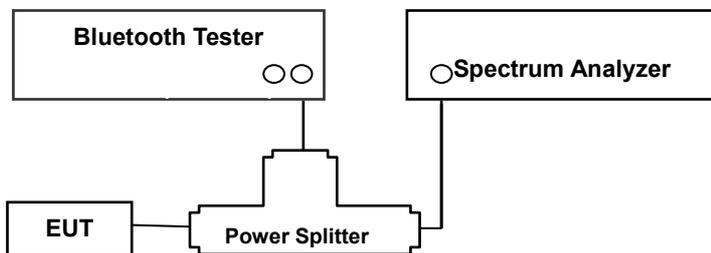

TEST PROCEDURE

This test is performed with hopping off and hopping on.

The Spectrum Analyzer is set to (DA 00-705)

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation

RBW \geq 1% of the span

VBW \geq RBW

Sweep = Auto

Detector = Peak

Trace = Max hold

TEST RESULTS

See attached.

Note :

1. The results in plot is already including the actual values of loss for the splitter and cable combination.
2. Spectrum offset = Power Splitter loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. Actual value of loss for the splitter and cable combination is 7.18 dB at 2402 MHz and is 7.23 dB at 2480 MHz. So, 7.2 dB is offset. And the offset gap in the 2.4 GHz range do not affect the band edge measurement final result.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNFD855P

Test Data

- Without hopping


Outside Frequency Band	GFSK	8DPSK	$\pi/4$ DQPSK	Limit (dBc)	Margin			Result
	(dB)	(dB)	(dB)		GFSK (dBc)	8DPSK (dBc)	$\pi/4$ DQPSK (dBc)	
Lower	59.18	59.88	58.99	20	39.18	39.88	38.99	PASS
Upper	66.37	65.25	64.19		46.37	45.25	44.19	PASS

- With hopping


Outside Frequency Band	GFSK	8DPSK	$\pi/4$ DQPSK	Limit (dBc)	Margin			Result
	(dB)	(dB)	(dB)		GFSK (dBc)	8DPSK (dBc)	$\pi/4$ DQPSK (dBc)	
Lower	58.174	60.694	59.130	20	38.174	40.694	39.130	PASS
Upper	68.932	66.832	66.411		48.932	46.832	46.411	PASS



Test Plots without hopping (GFSK)
Band Edges (Low-CH)

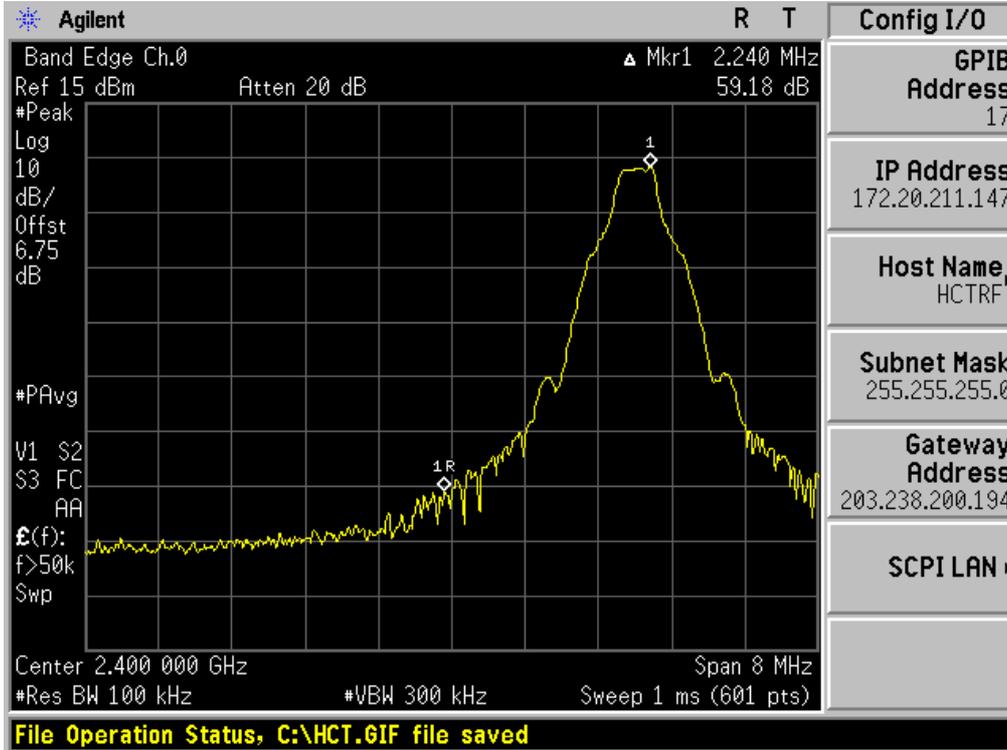

Test Plots without hopping (GFSK)
Band Edges (High-CH)

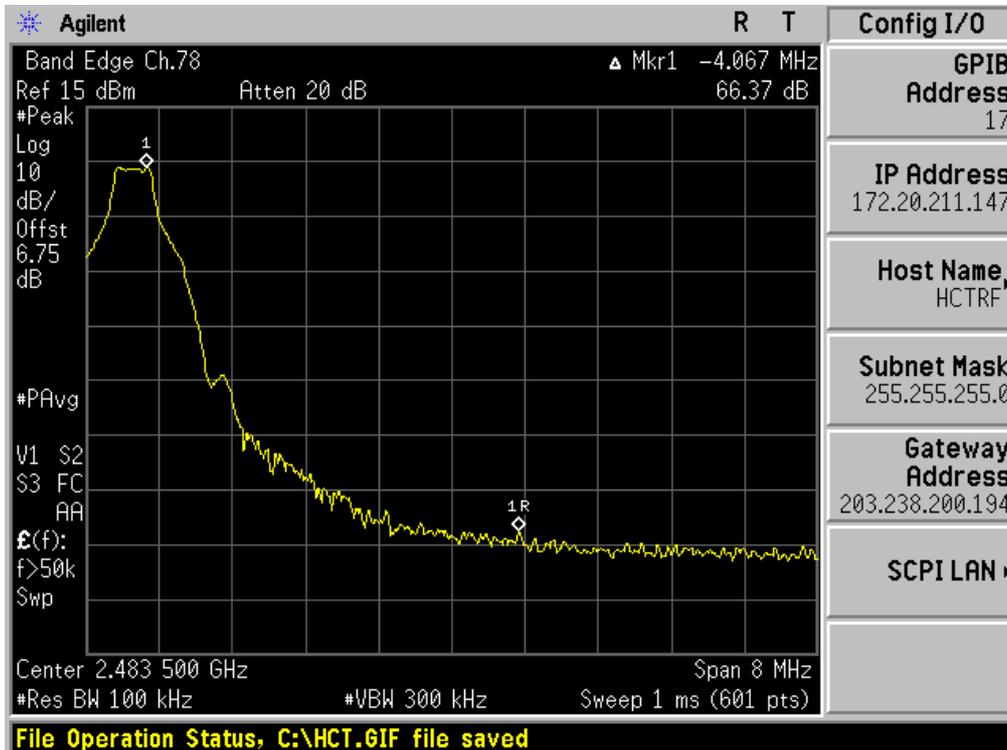


FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE	Phone with	FCC ID: ZNFD855P



Test Plots without hopping (8DPSK)
Band Edges (Low-CH)




Test Plots without hopping (8DPSK)
Band Edges (High-CH)

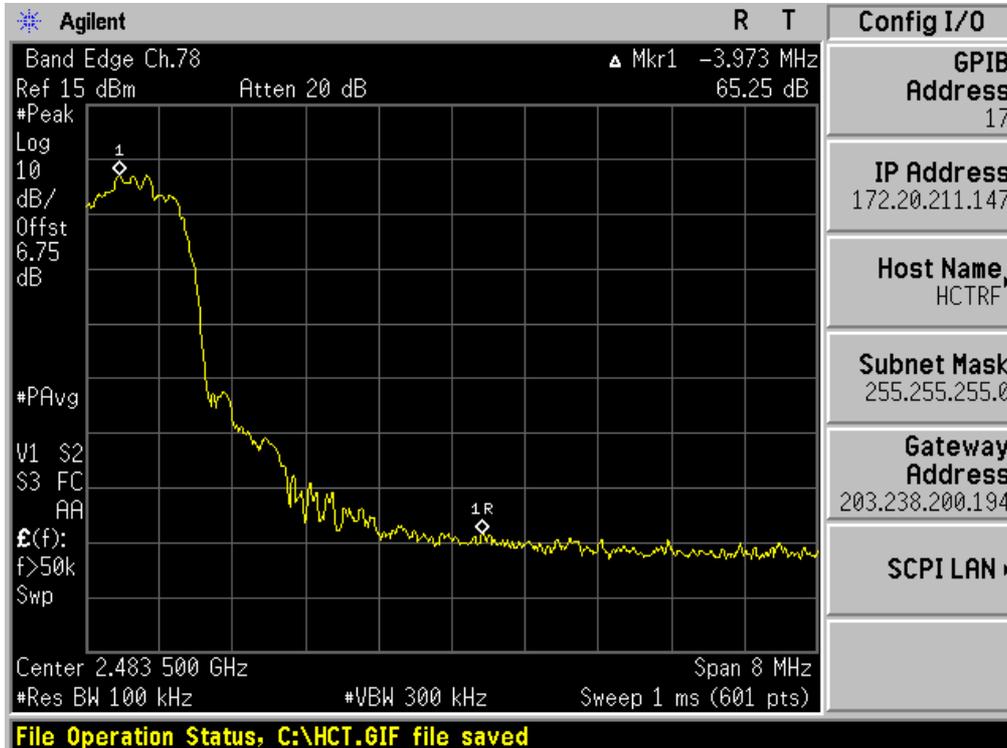


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNFD855P



Test Plots without hopping ($\pi/4$ DQPSK)
Band Edges (Low-CH)

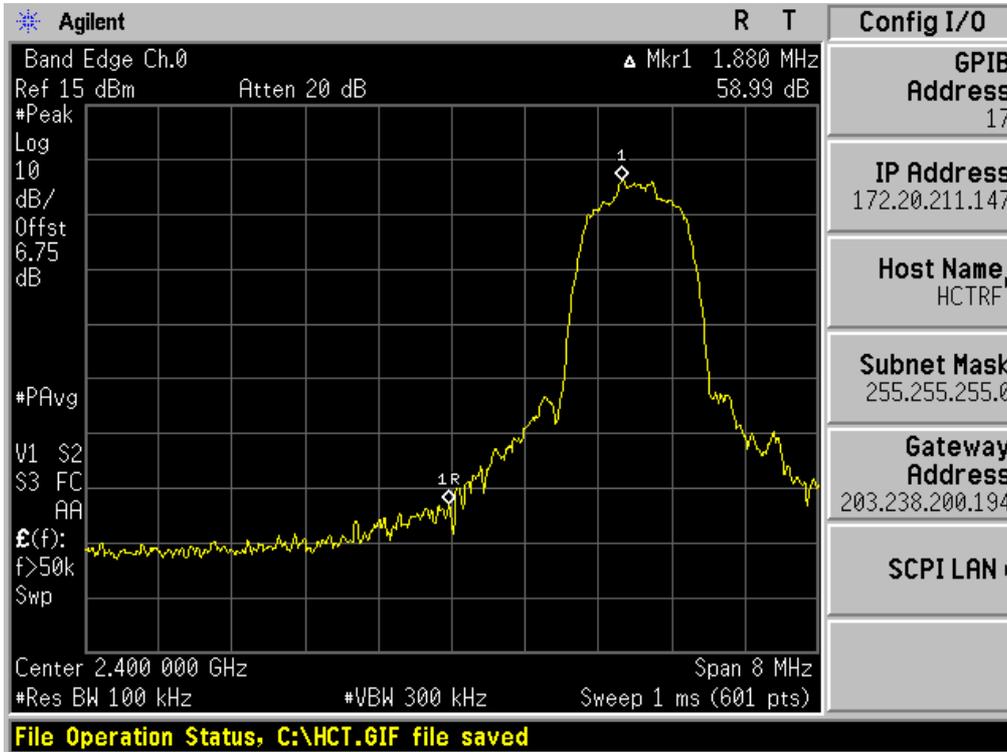


Test Plots without hopping ($\pi/4$ DQPSK)
Band Edges (High-CH)

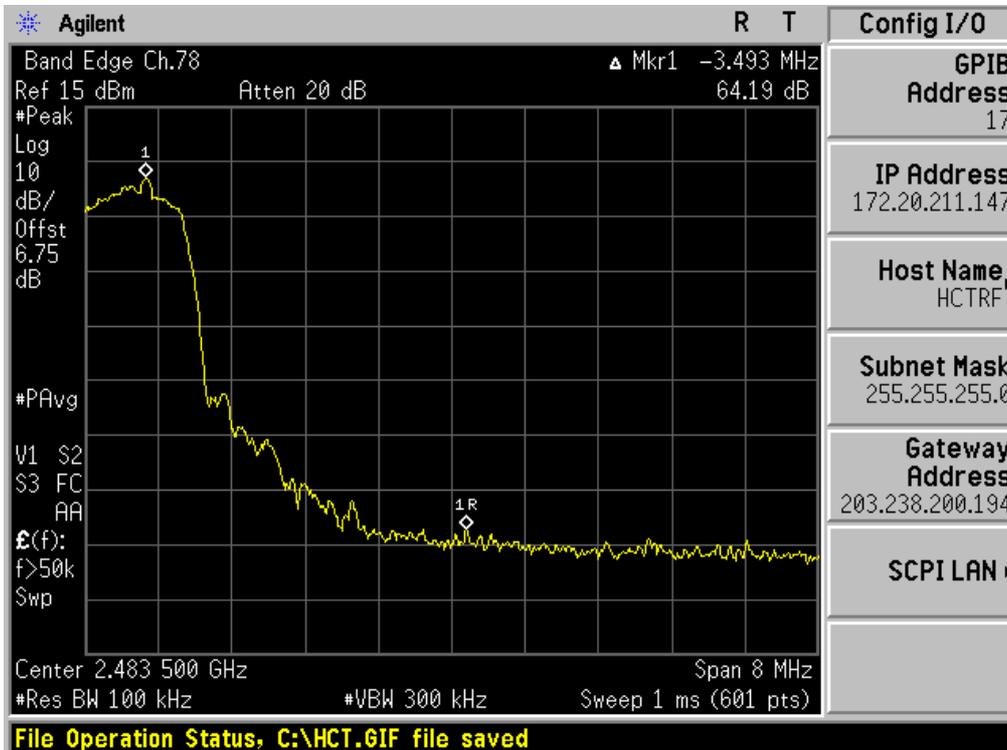


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNFD855P



Test Plots with hopping (GFSK)
Band Edges (Low-CH)

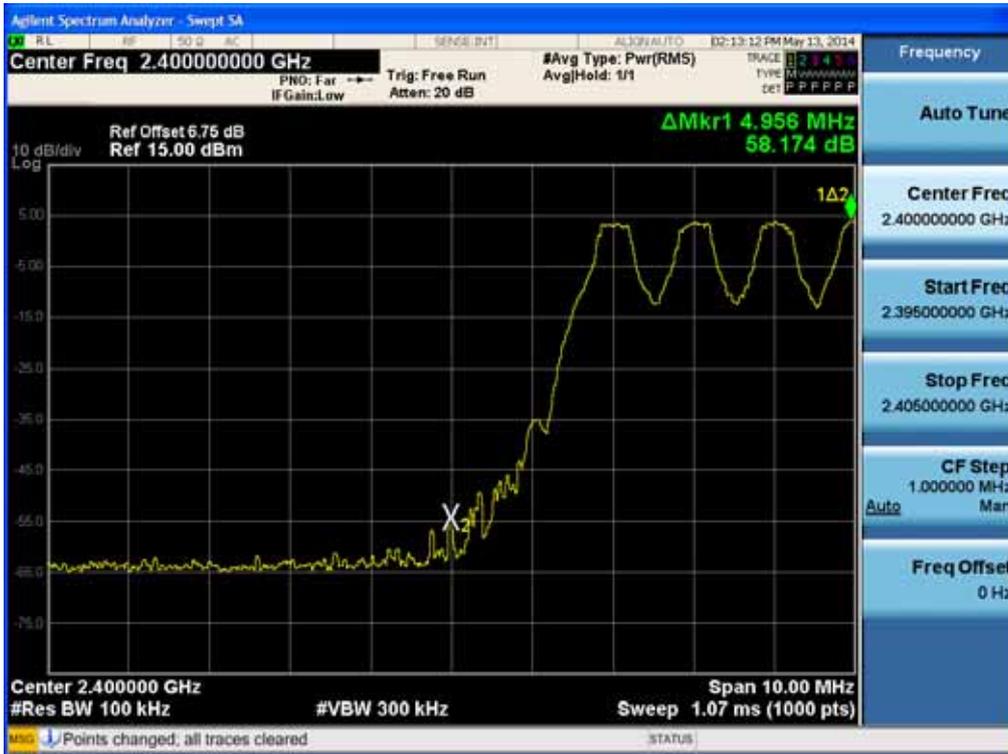

Test Plots with hopping (GFSK)
Band Edges (High-CH)

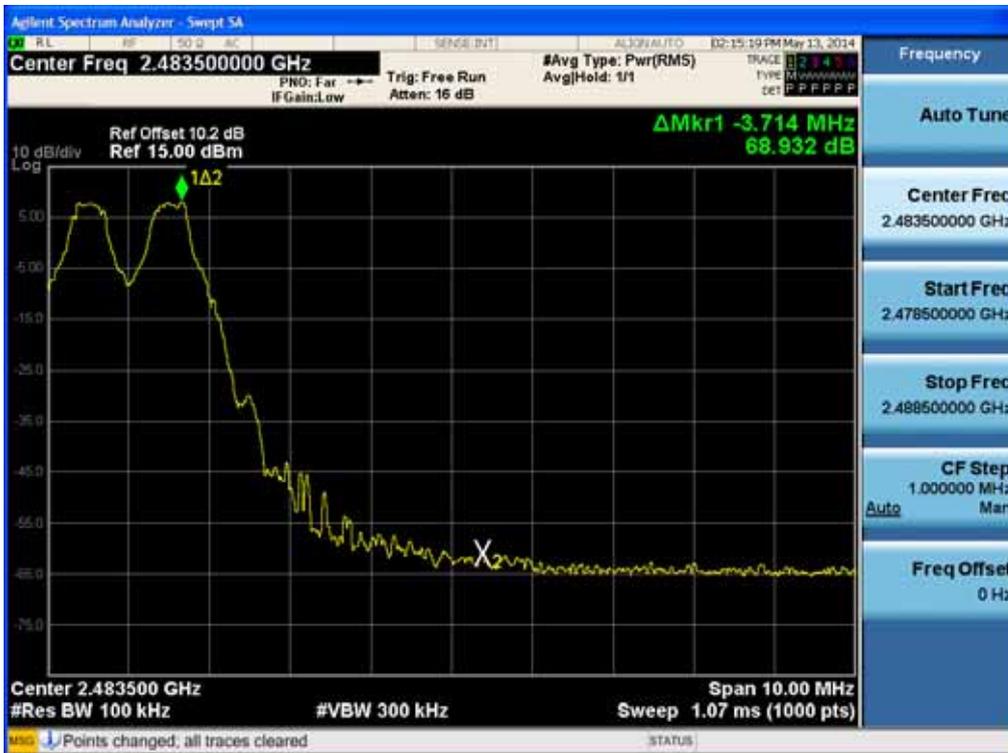


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNF0855P

Test Plots with hopping (8DPSK)
Band Edges (Low-CH)



Test Plots with hopping (8DPSK)
Band Edges (High-CH)

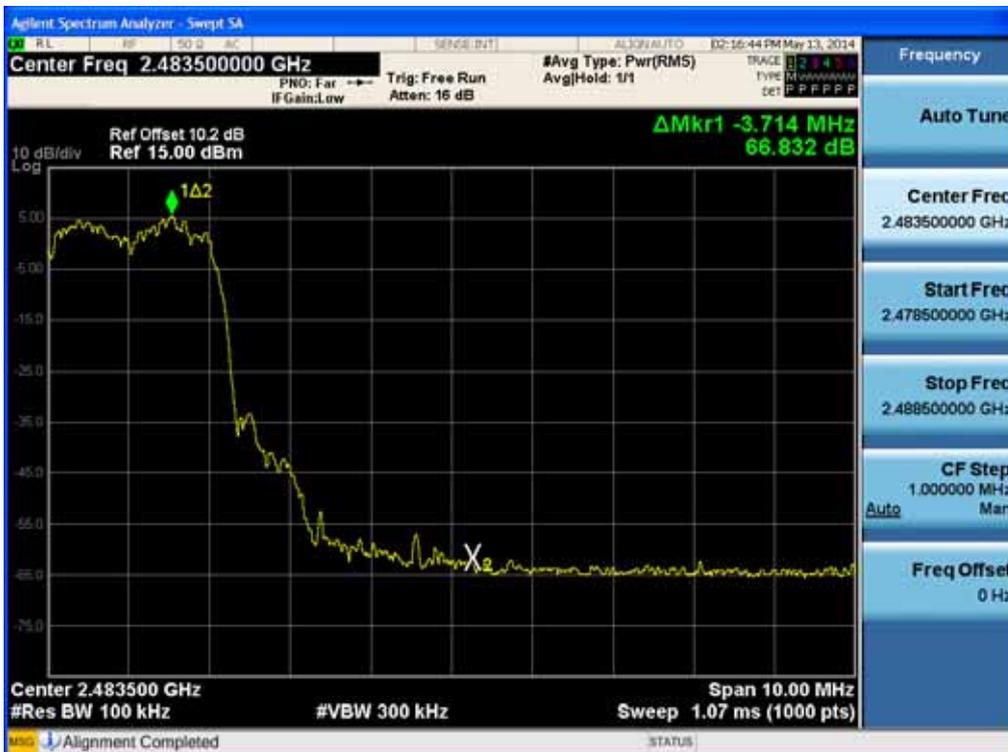




Test Plots with hopping ($\pi/4$ DQPSK)
Band Edges (Low-CH)



Test Plots with hopping ($\pi/4$ DQPSK)
Band Edges (High-CH)

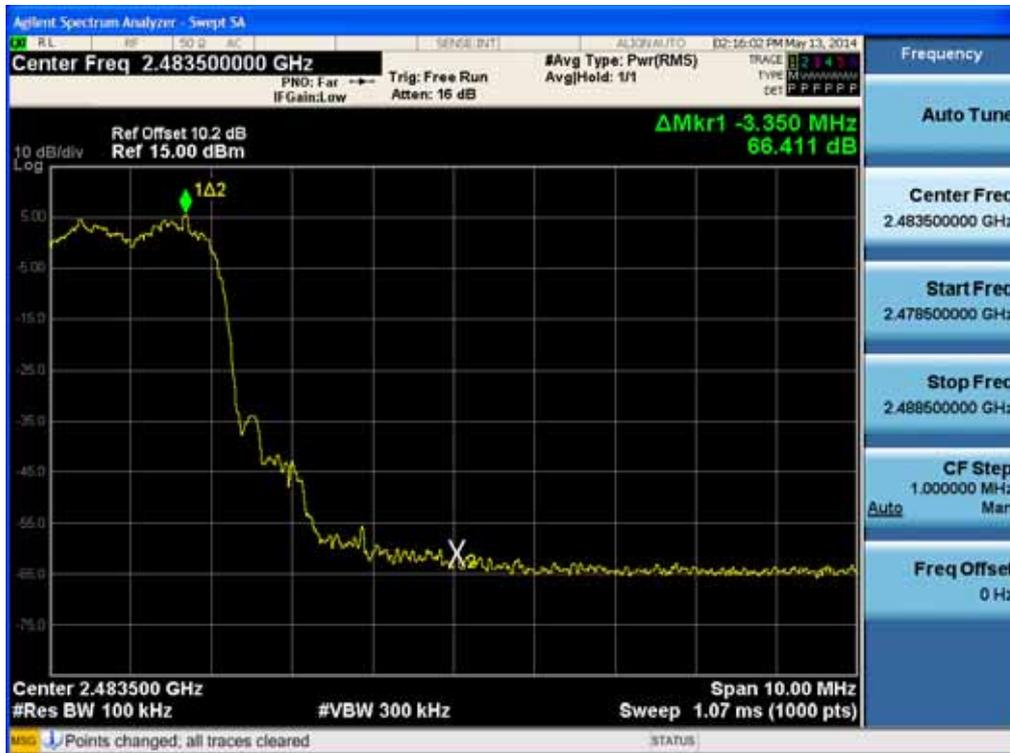


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNF855P

8.3 FREQUENCY SEPARATION / OCCUPIED BANDWIDTH (99% BW)

LIMIT

According to §15.247(a)(1), Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Test Configuration

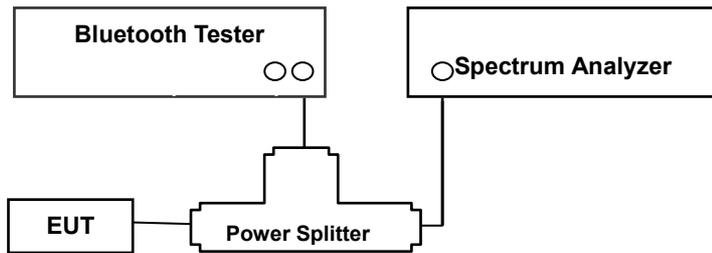

TEST PROCEDURE

The Channel Separation test is performed with hopping on. And the 20 dB Bandwidth test is performed with hopping off.

The Spectrum Analyzer is set to (DA 00-705)

Span = wide enough to capture the peaks of two adjacent channels

RBW \geq 1% of the span

VBW \geq RBW

Sweep = Auto

Detector = Peak

Trace = Max hold

The trace was allowed to stabilize. The marker-delta function was used to determine the separation between the peaks of the adjacent channels.

TEST RESULTS

No non-compliance noted

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNFD855P



Test Data

Channel Separation (kHz)			20dB Bandwidth (kHz)				Limit (kHz)	Result
GFSK	8DPSK	$\pi/4$ DQPSK	Channel	GFSK	8DPSK	$\pi/4$ DQPSK		
1000	835	845	Low CH	939.5	1297.0	1292.0	>25 or >2/3 of the 20dB BW	Pass
			Middle CH	940.3	1267.0	1280.0		
			High CH	940.7	1296.0	1292.0		


Occupied Bandwidth (99% BW)

99% BW (kHz)			
Channel	GFSK	8DPSK	$\pi/4$ DQPSK
Low CH	874.8	1170.0	1164.1
Middle CH	880.8	1157.0	1163.0
High CH	877.1	1169.4	1162.2


Note : We can not know what use channel in AFH mode. So, we can not test in AFH mode. Also, if the test performs some channel in AFH mode, the test result is not different with normal mode.



Test Plots (GFSK)
Channel Separation

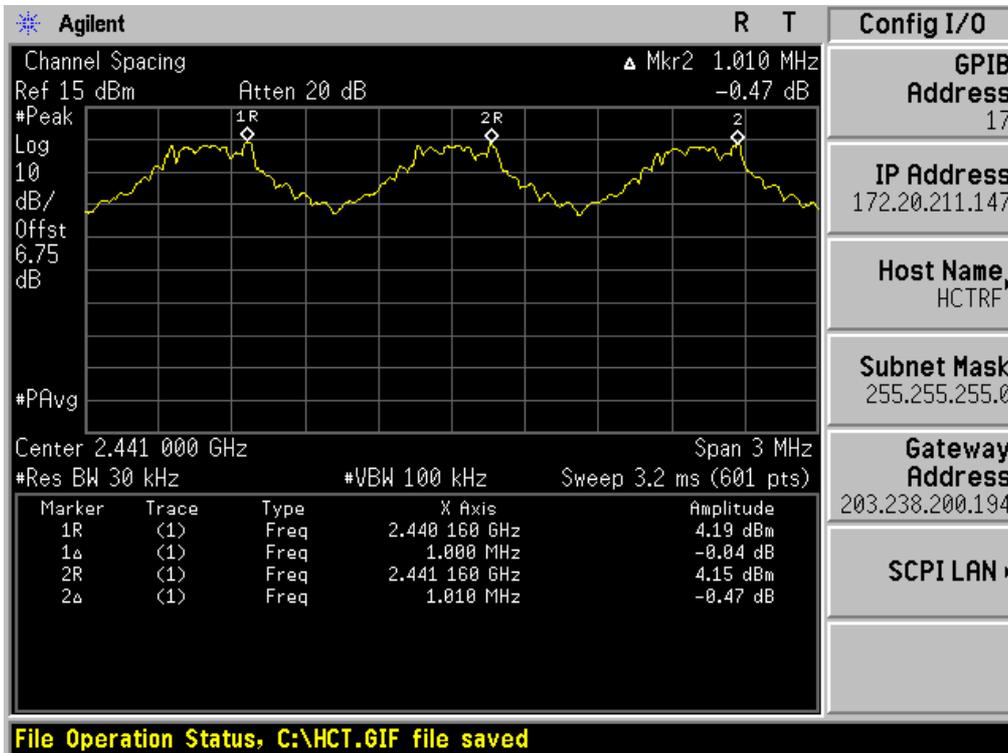


Test Plots (8DPSK)
Channel Separation

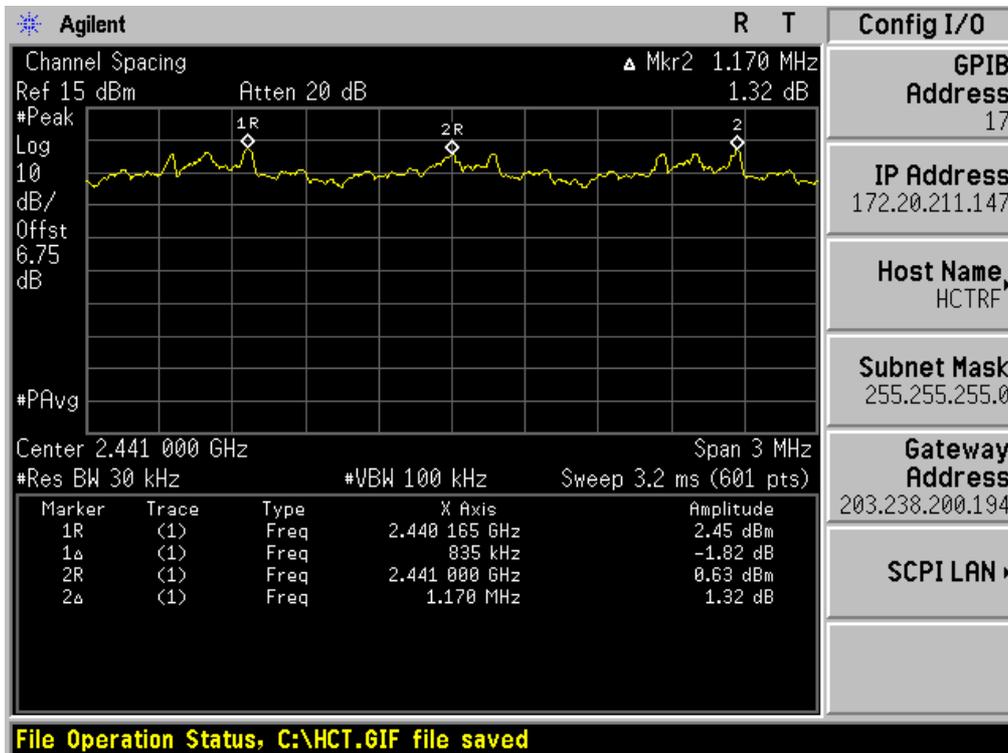



Test Plots ($\pi/4$ DQPSK)
Channel Separation

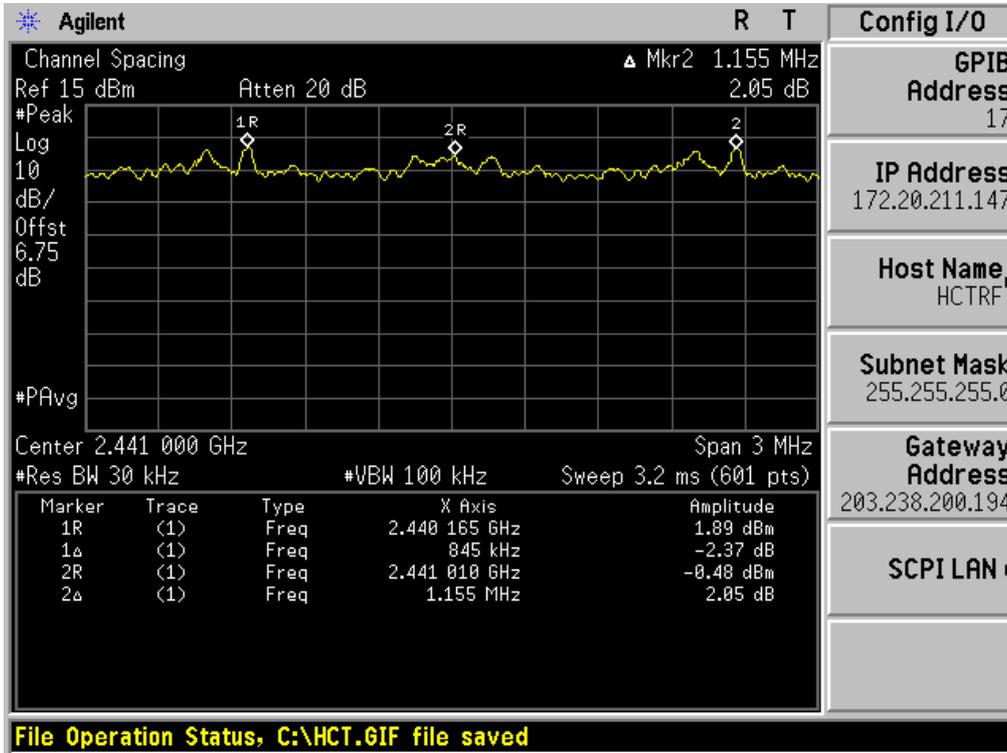

File Operation Status, C:\HCT.GIF file saved

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type:	Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC	FCC ID: ZNFD855P	



Test Plots (GFSK)

20 dB Bandwidth & Occupied Bandwidth (Low-CH)



Test Plots (GFSK)

20 dB Bandwidth & Occupied Bandwidth (Mid-CH)



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNFD855P




Test Plots (GFSK)

20 dB Bandwidth & Occupied Bandwidth (High-CH)



Test Plots (8DPSK)


20 dB Bandwidth & Occupied Bandwidth (Low-CH)

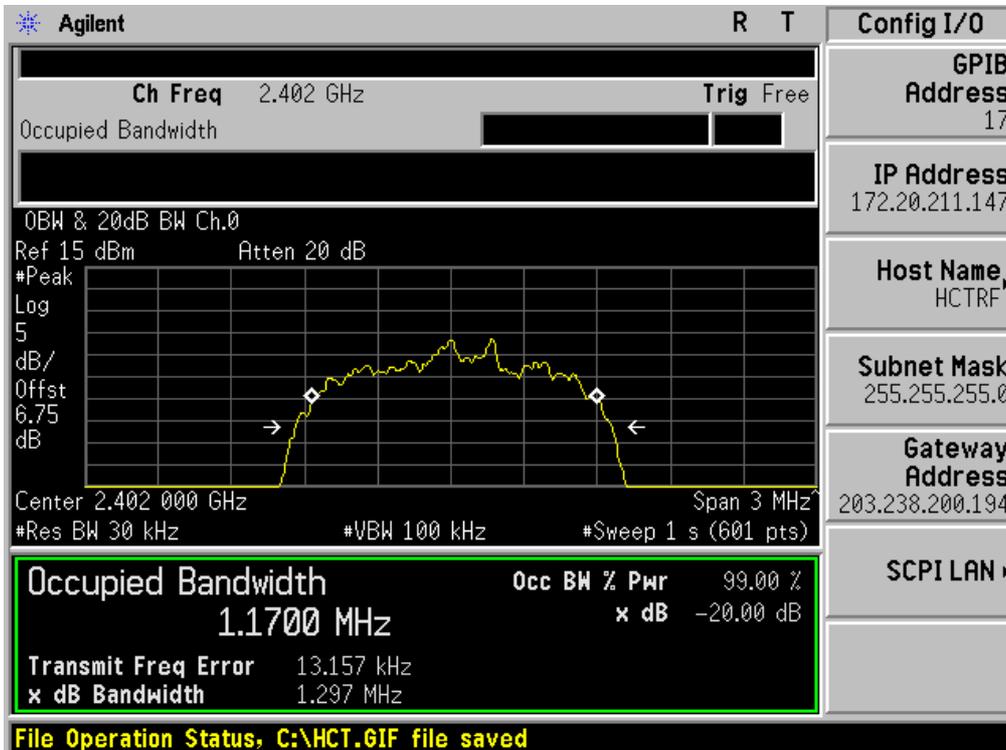


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNFD855P



Test Plots (8DPSK)
20 dB Bandwidth & Occupied Bandwidth (Mid-CH)

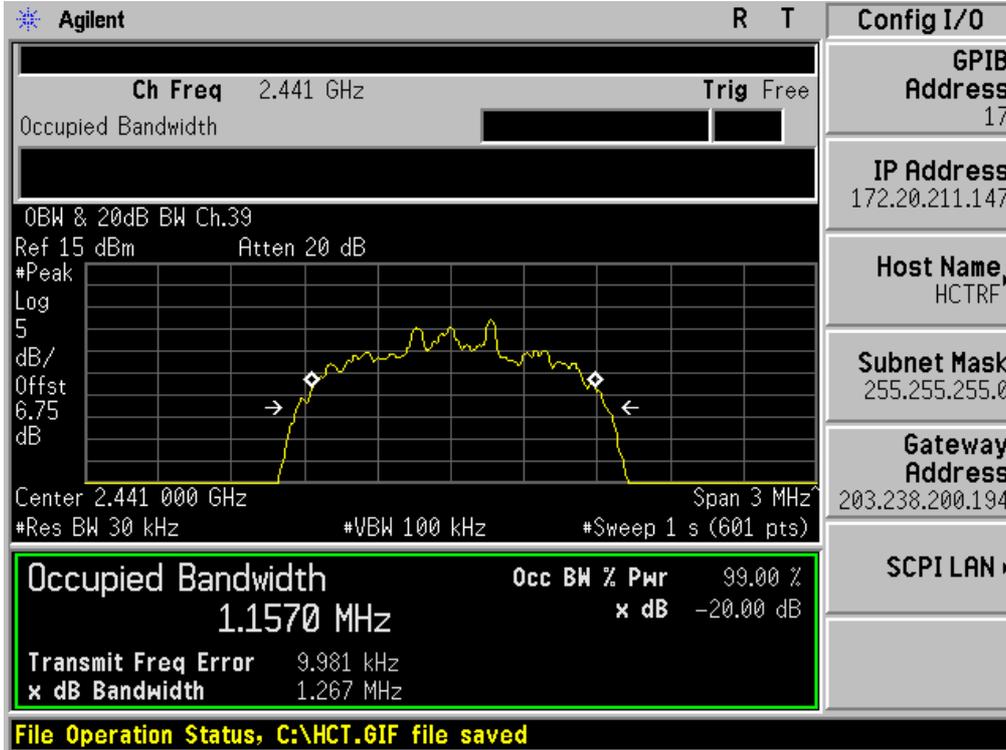


Test Plots (8DPSK)
20 dB Bandwidth & Occupied Bandwidth (High-CH)

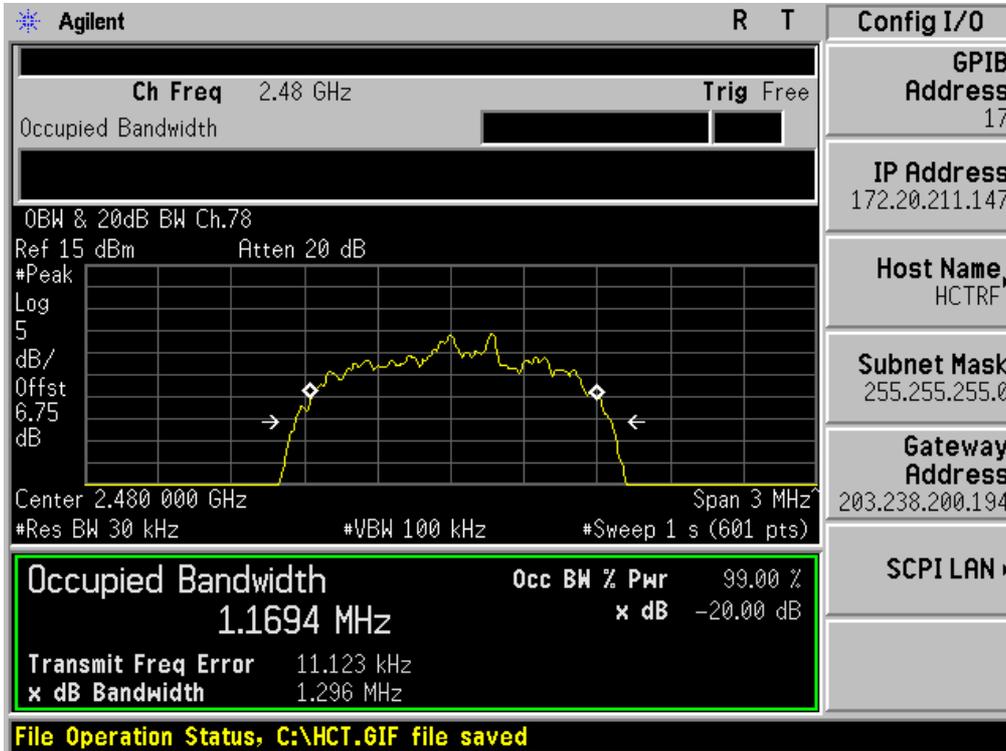


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNFD855P



Test Plots ($\pi/4$ DQPSK)
20 dB Bandwidth & Occupied Bandwidth (Low-CH)

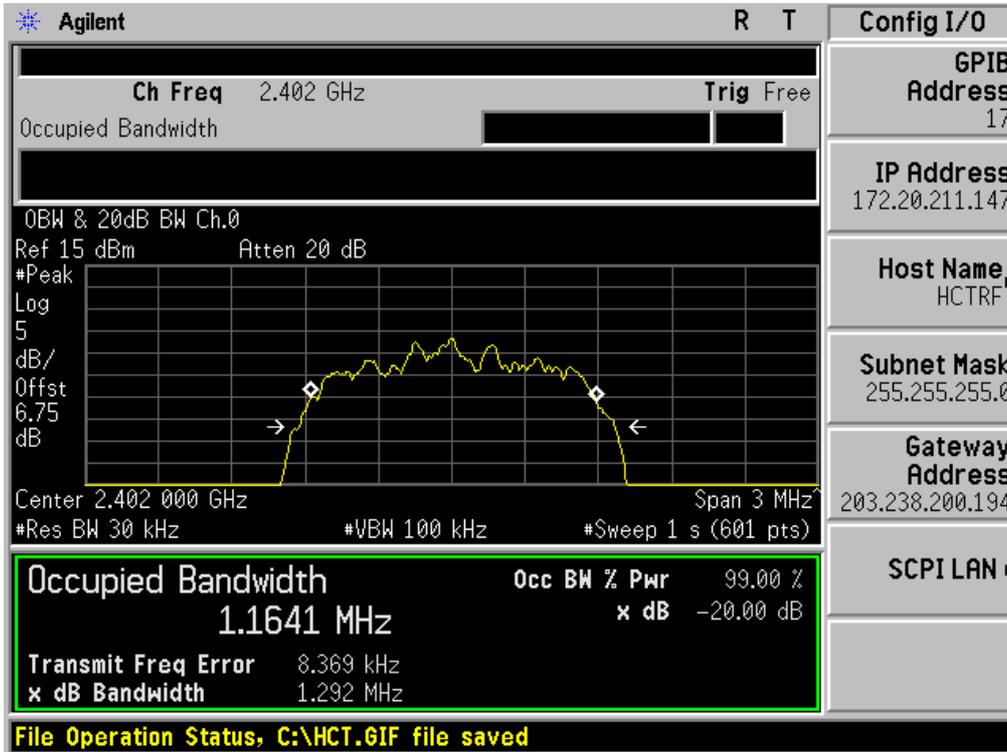

Test Plots ($\pi/4$ DQPSK)
20 dB Bandwidth & Occupied Bandwidth (Mid-CH)

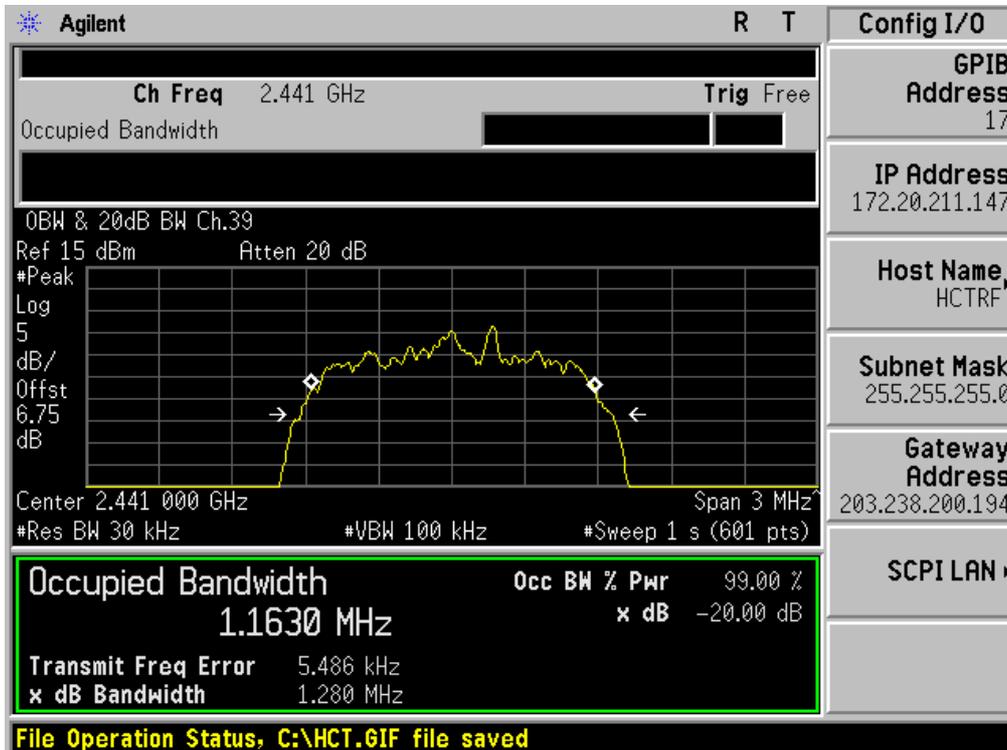

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNFD855P



Test Plots ($\pi/4$ DQPSK)
 20 dB Bandwidth & Occupied Bandwidth (High-CH)




FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNF855P

8.4 NUMBER OF HOPPING FREQUENCY

LIMIT

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400 MHz ~ 2483.5 MHz bands shall use at least 15 hopping frequencies.

Test Configuration

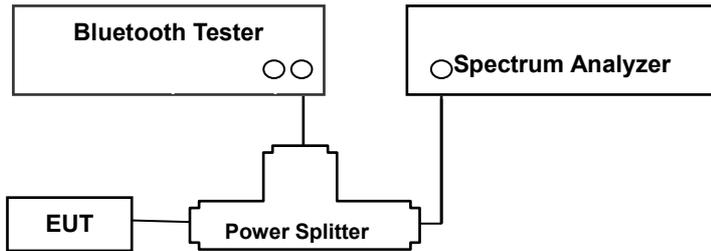

TEST PROCEDURE

The Bluetooth frequency hopping function of the EUT was enabled.

The Spectrum Analyzer is set to (DA 00-705)

Span = the frequency band of operation

RBW \geq 1% of the span

VBW \geq RBW

Sweep = Auto

Detector = Peak

Trace = Max hold

The trace was allowed to stabilize.

TEST RESULTS

No non-compliance noted

Test Data


Result (No. of CH)			Limit	Result
GFSK	8DPSK	$\pi/4$ DQPSK		
79	79	79	>15	Pass

Note : In case of AFH mode, minimum number of hopping channels is 20.




Test Plots (GFSK)

Number of Channels (2.4 GHz - 2.441 GHz)

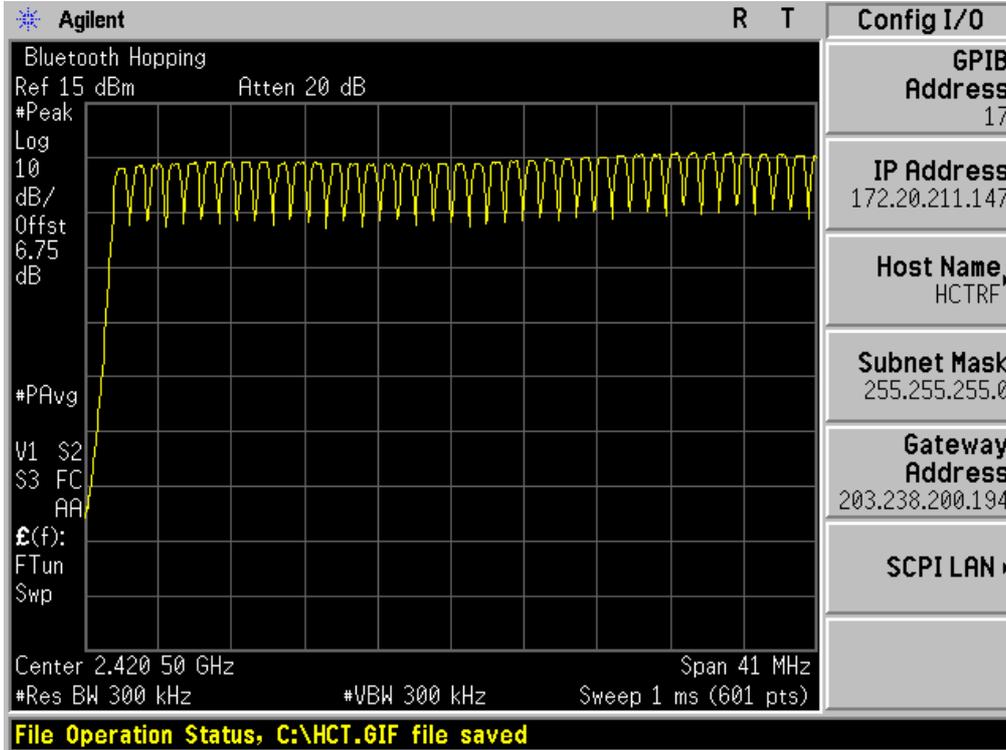

Test Plots (GFSK)

Number of Channels (2.441 GHz - 2.4835 GHz)

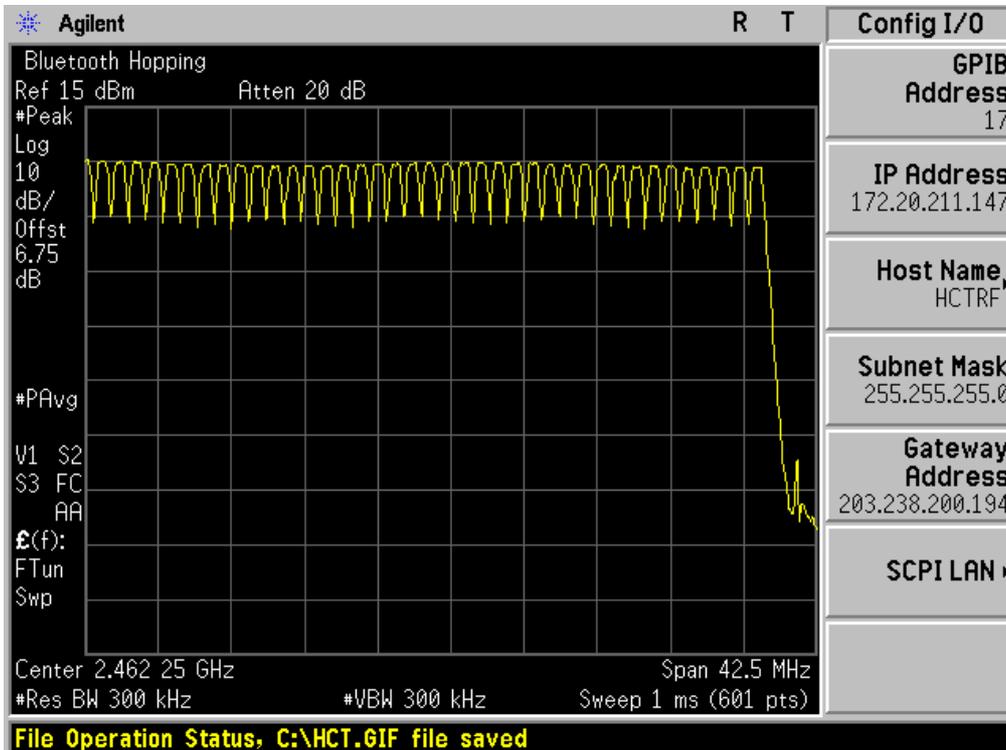


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNF0855P




Test Plots (8DPSK)

Number of Channels (2.4 GHz - 2.441 GHz)

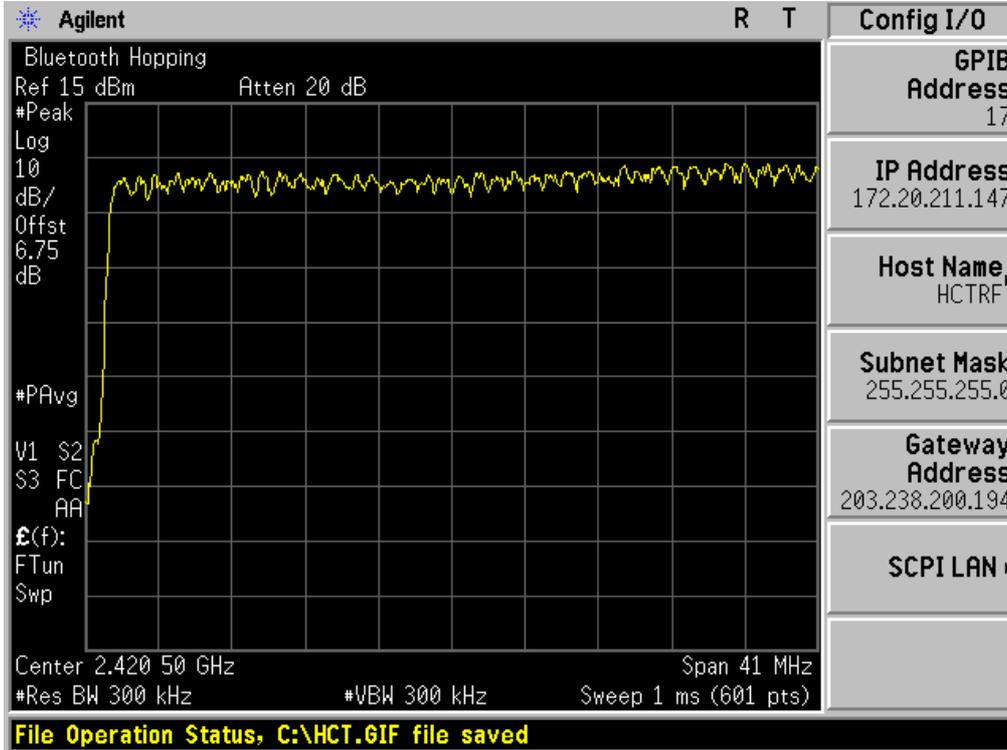

Test Plots (8DPSK)

Number of Channels (2.441 GHz - 2.4835 GHz)

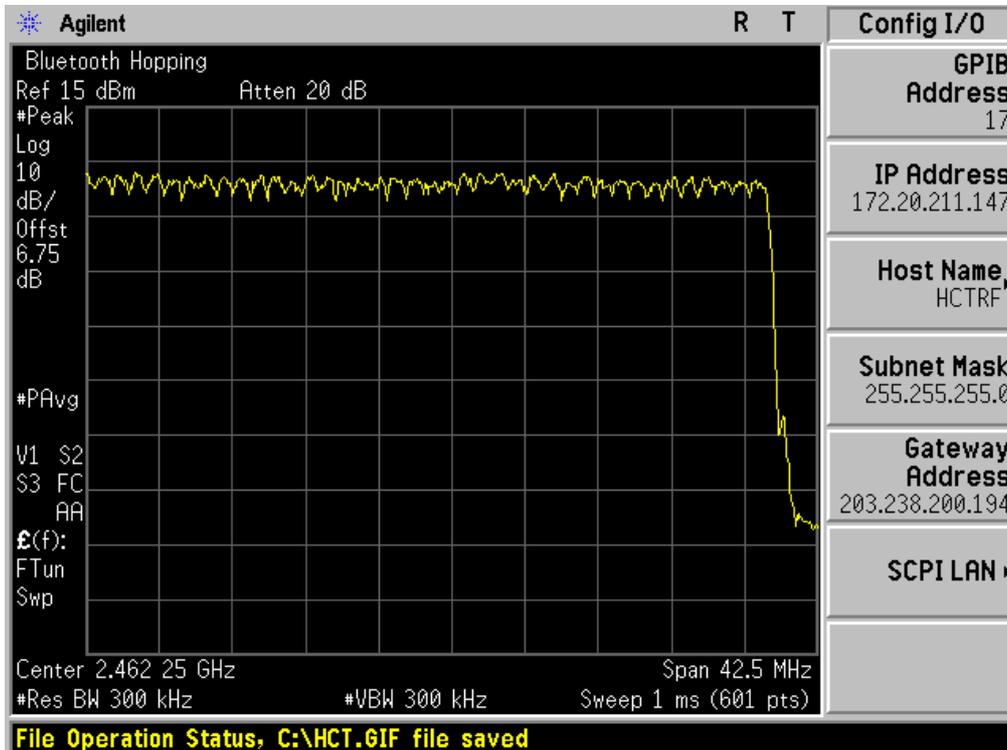


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNF0855P




Test Plots ($\pi/4$ DQPSK)

Number of Channels (2.4 GHz - 2.441 GHz)

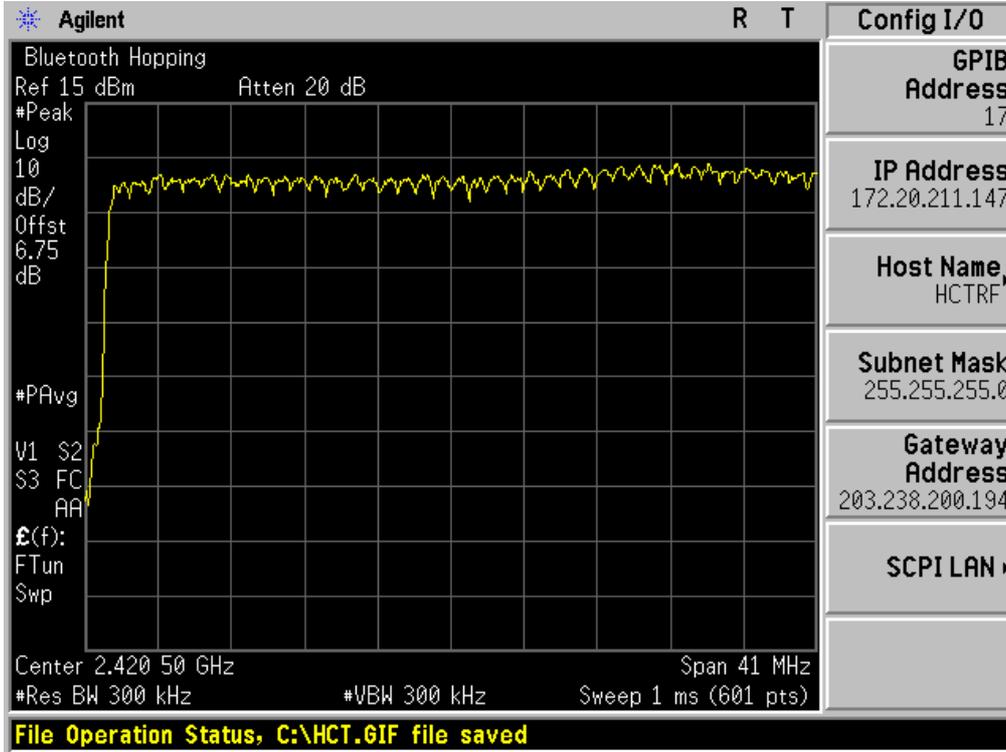

Test Plots ($\pi/4$ DQPSK)

Number of Channels (2.441 GHz - 2.4835 GHz)

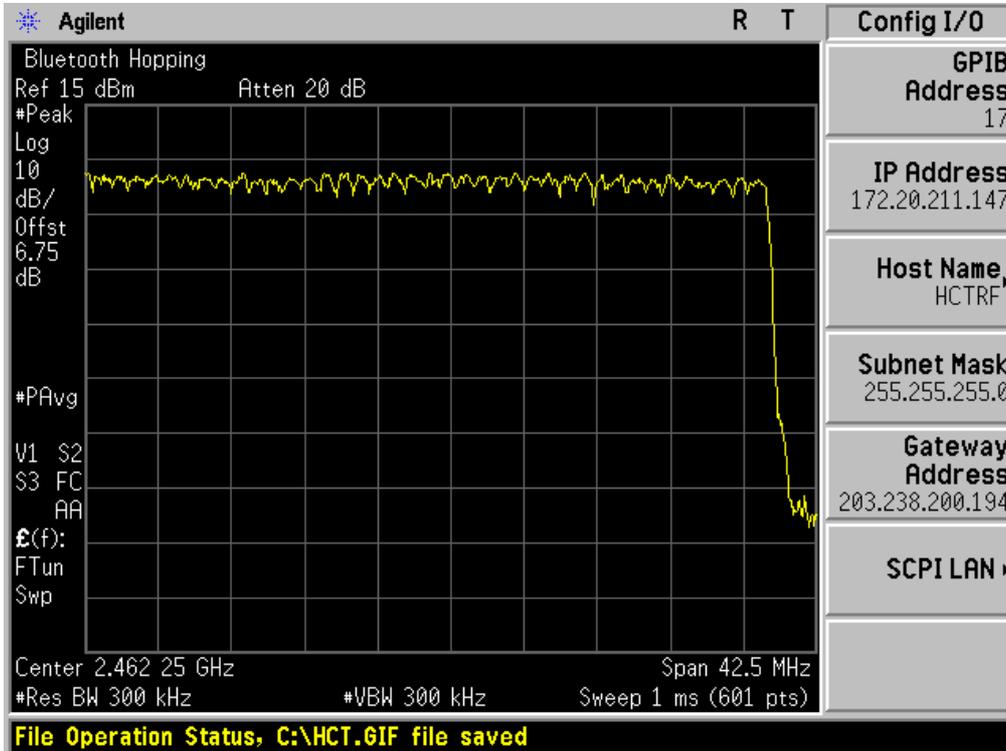


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNF0855P

8.5 TIME OF OCCUPANCY (DWELL TIME)

LIMIT

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400 MHz ~ 2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

Test Configuration

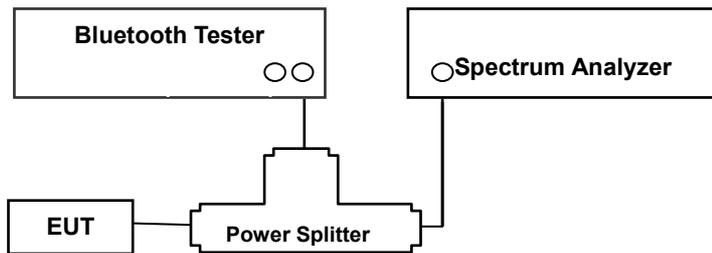

TEST PROCEDURE

This test is performed with hopping off.

EUT was set to transmit the longest packet type (DH5)

The Spectrum Analyzer is set to (DA 00-705)

Span = Zero span, Centered on a hopping channel

RBW = 1 MHz

VBW ≥ RBW

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector = Peak

Trace = Max hold

The marker-delta function was used to determine the dwell time.

Normal Mode / EDR Mode

DH 5(The longest packet type for GFSK)

CH Mid : $2.883 * (1600/6)/79 * 31.6 = 307.52$ (ms)

2-DH 5(The longest packet type for $\pi/4$ DQPSK)

CH Mid : $2.883 * (1600/6)/79 * 31.6 = 307.52$ (ms)

3-DH 5(The longest packet type for 8DPSK)

CH Mid : $2.892 * (1600/6)/79 * 31.6 = 308.48$ (ms)

AFH Mode

DH 5(The longest packet type for GFSK)

CH Mid : $2.883 * (800/6)/20 * 8.0 = 153.76$ (ms)

2-DH 5(The longest packet type for $\pi/4$ DQPSK)

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNFD855P



CH Mid : $2.883 * (800/6)/20 * 8.0 = 153.76$ (ms)

3-DH 5(The longest packet type for 8DPSK)

CH Mid : $2.892 * (800/6)/20 * 8.0 = 154.24$ (ms)

Note :

A DH5 Packet need 5 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case 1600/6 hops per second with 79 channels. So the system have each channel 3.3755 times per second and so for 31.6 seconds the system have 106.7 times of appearance.

Each tx-time per appearance of DH5 is 2.883 ms.

Dwell time = Tx-time * 106.7

TEST RESULTS


See the table.

	Channel	GFSK	8DPSK	$\pi/4$ DQPSK
Pulse Time (ms)	Low	2.883	2.883	2.892
	Mid	2.883	2.892	2.883
	High	2.883	2.883	2.883


	Channel	GFSK	8DPSK	$\pi/4$ DQPSK	Period Time (s)	Limit (ms)	Result
Total of Dwell (ms)	Low	307.52	307.52	308.48	31.6	400	PASS
	Mid	307.52	308.48	307.52	31.6		PASS
	High	307.52	307.52	307.52	31.6		PASS



Test Plots (GFSK)
Dwell Time (Low-CH)

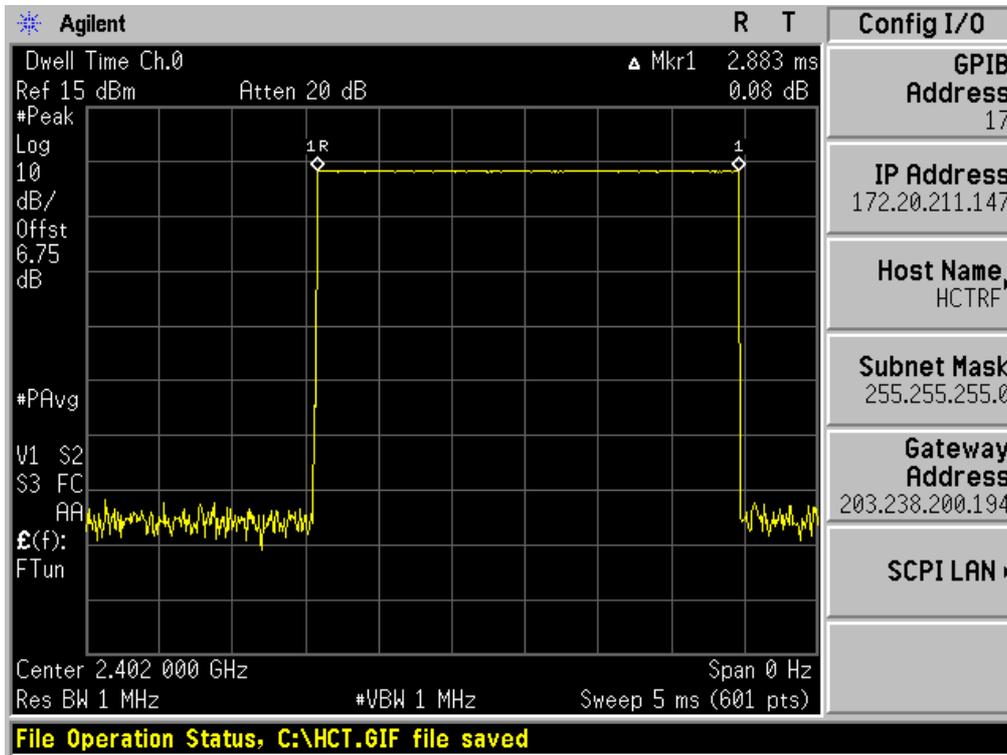


Test Plots (GFSK)
Dwell Time (Mid-CH)

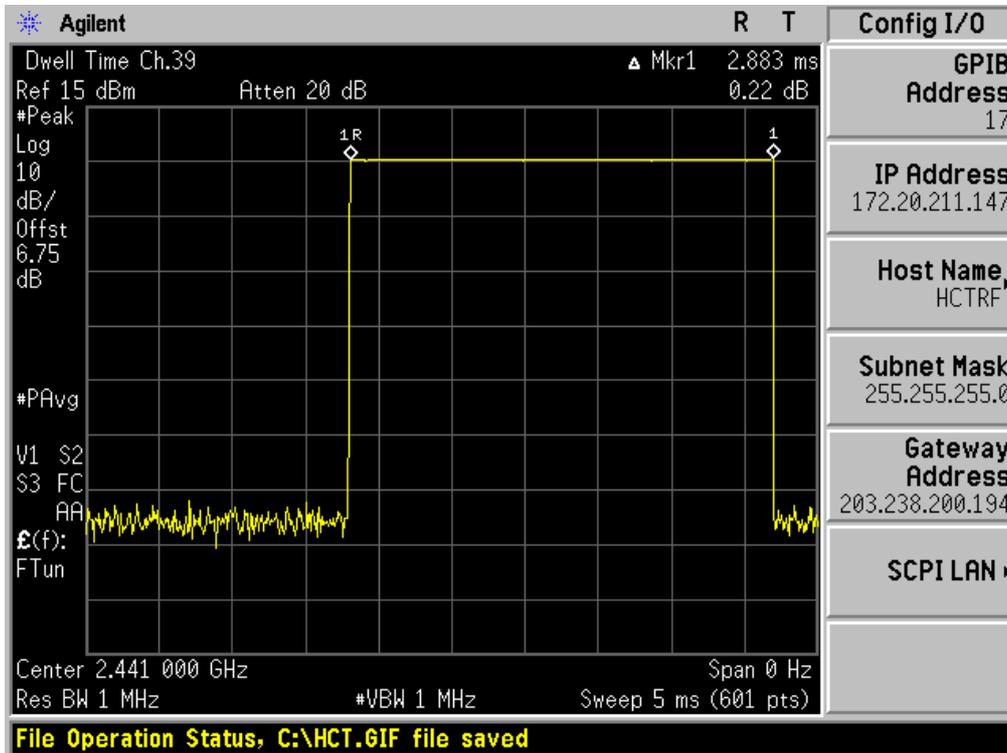


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNF0855P



Test Plots (GFSK)
Dwell Time (High-CH)

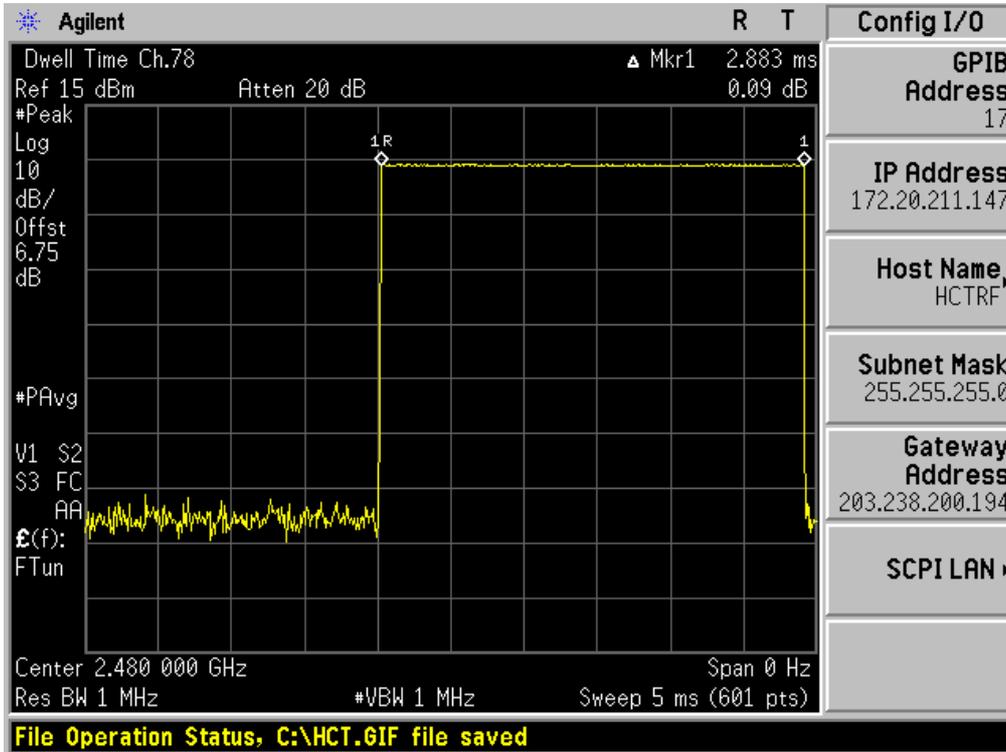


Test Plots (8DPSK)
Dwell Time (Low-CH)

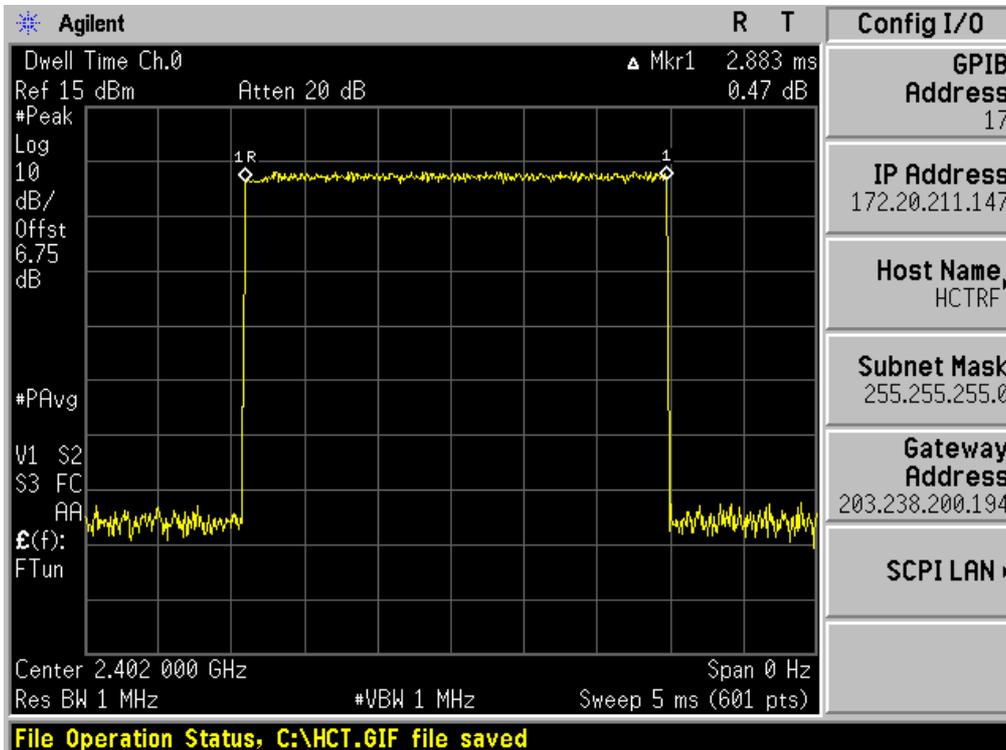


FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNF0855P



Test Plots (8DPSK)
Dwell Time (Mid-CH)

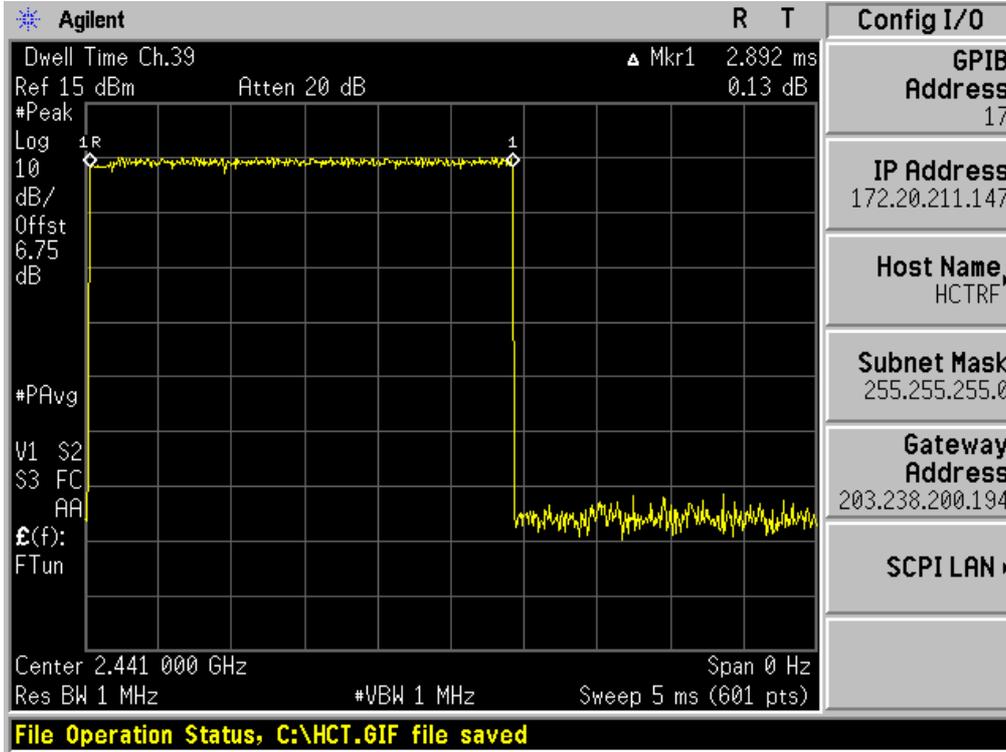


Test Plots (8DPSK)
Dwell Time (High-CH)

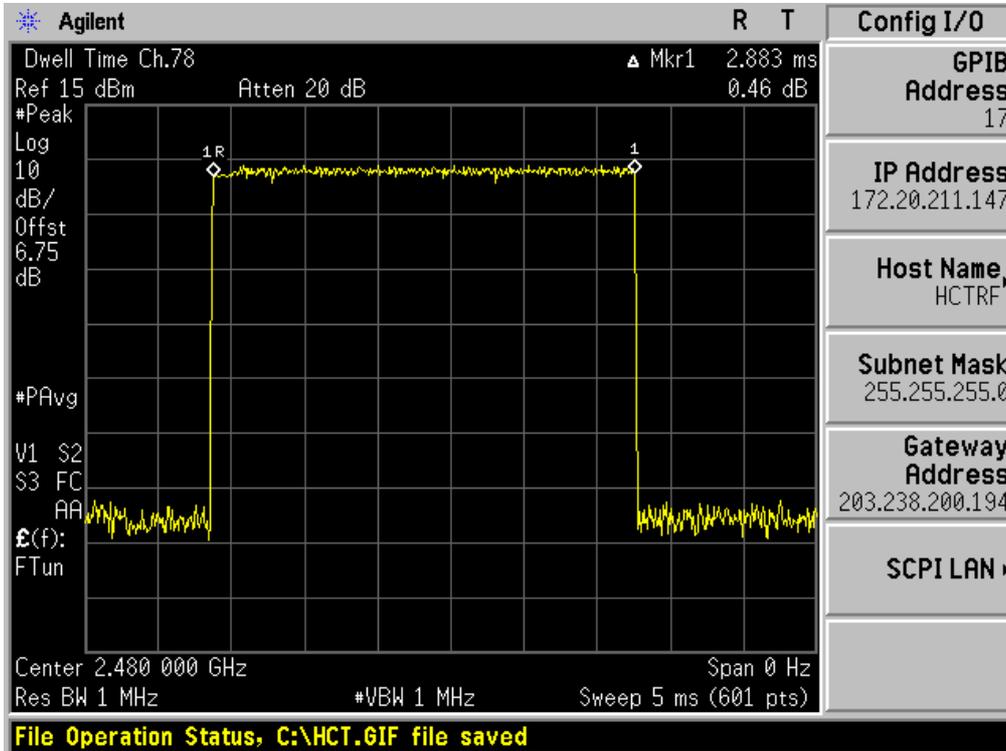


FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE	Phone with	FCC ID: ZNF0855P



Test Plots ($\pi/4$ DQPSK)
Dwell Time (Low-CH)

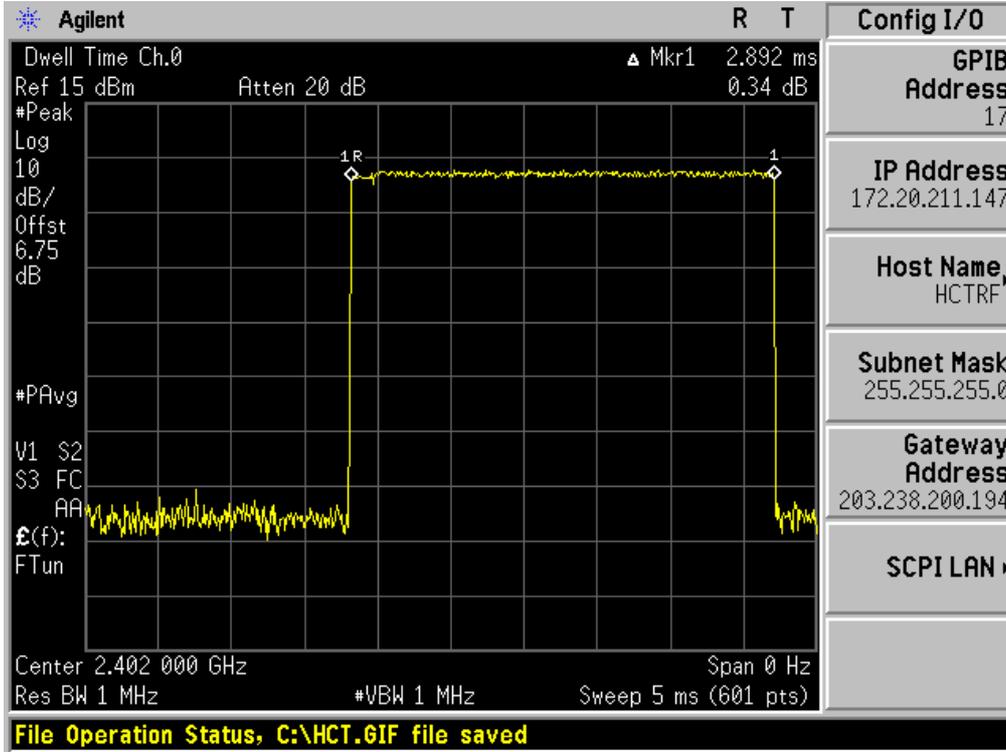


Test Plots ($\pi/4$ DQPSK)
Dwell Time (Mid-CH)

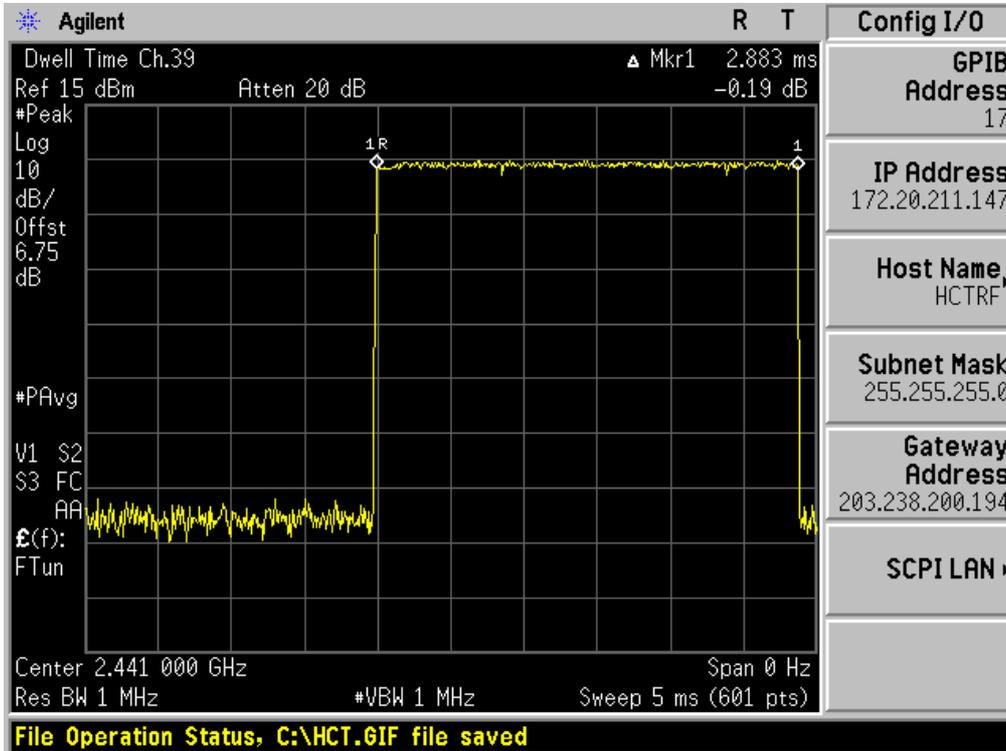

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNFD855P



Test Plots ($\pi/4$ DQPSK)
Dwell Time (High-CH)

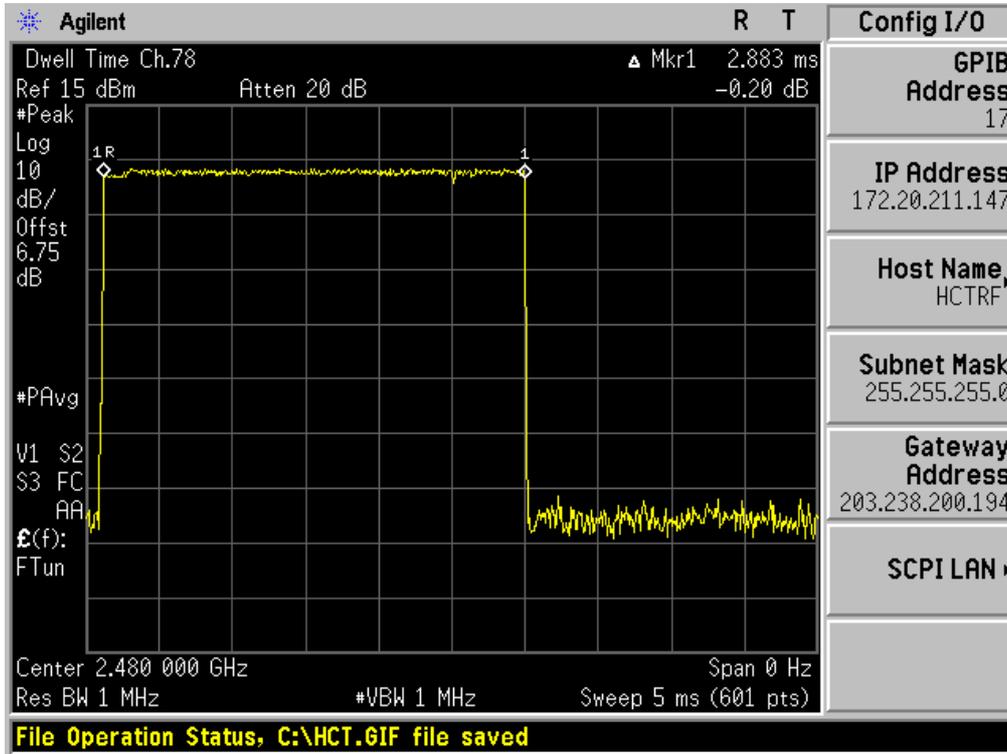

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNFD855P

8.6 SPURIOUS EMISSIONS


8.6.1 CONDUCTED SPURIOUS EMISSIONS

Test Requirements and limit, §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit : 20 dBc

Test Configuration

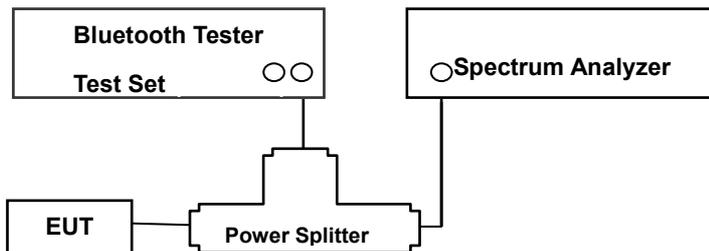

TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer.

The Spectrum Analyzer is set to (DA 00-705)

1. Span = wide enough to capture the peak level of the in-band emission and all spurious emissions(e.g.,harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.
2. RBW = 100 kHz
3. VBW ≥ 300 kHz
4. Sweep = auto
5. Sweep point ≥ 2*span/RBW
5. Detector function = peak

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Bluetooth, WLAN, NFC	Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE	Phone with	FCC ID: ZNF855P



6. Trace = max hold

Measurements are made over the 30 MHz to 26 GHz range with the transmitter set to the lowest, middle, and highest channels.

This test is performed with hopping off.

TEST RESULTS

No non-compliance noted.

Note : In order to simplify the report, attached plots were only the worst case channel and data rate.

FACTORS FOR FREQUENCY

Freq(MHz)	Factor(dB)
30	10.01
100	10.02
200	10.10
300	10.09
400	10.13
500	10.21
600	10.13
700	10.31
800	10.18
900	10.30
1000	10.17
2000	8.53
2400*	7.18
2500*	7.21
3000	8.59
4000	10.02
5000	9.88
6000	5.70
7000	10.21
8000	6.13
9000	8.79
10000	12.46
11000	8.11
12000	9.52
13000	8.98
14000	8.13
15000	11.82
16000	6.92
17000	13.23
18000	10.25
19000	10.28
20000	9.10
21000	10.94
22000	11.54
23000	8.81
24000	11.71
25000	9.37
26000	9.34


Note : 1. ** is fundamental frequency range.

2. Factor = Cable loss + Splitter loss


FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNFD855P



Test Plots (8DPSK) - 30 MHz - 1 GHz
Spurious Emission (Mid-CH)

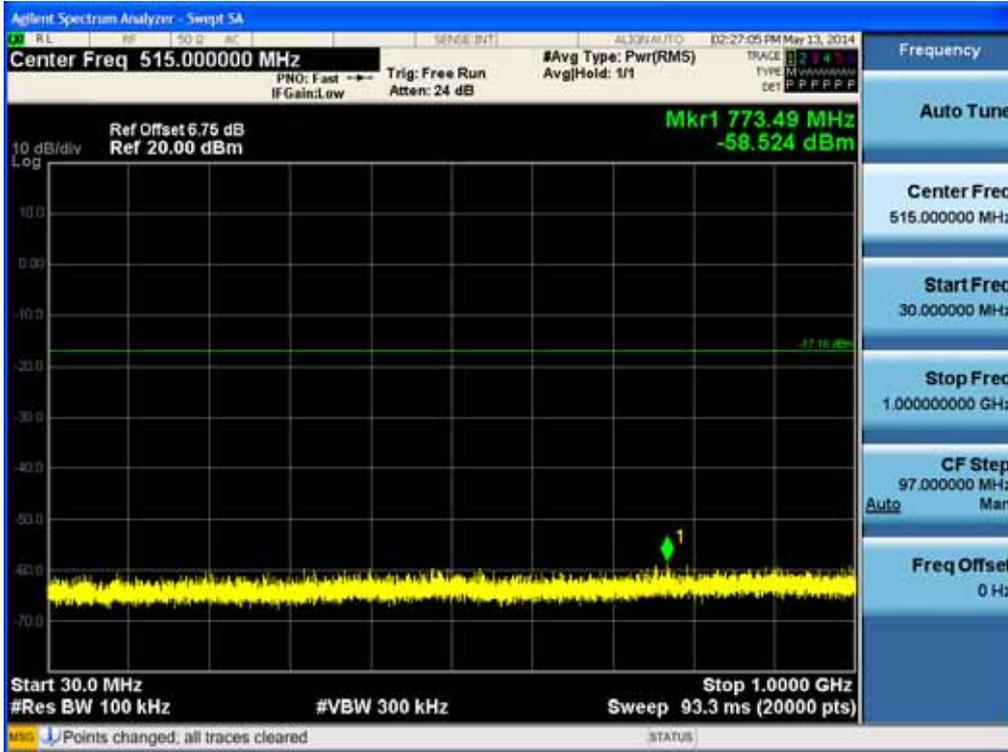


Test Plots (8DPSK) - 1 GHz – 3 GHz
Spurious Emission (Mid-CH)

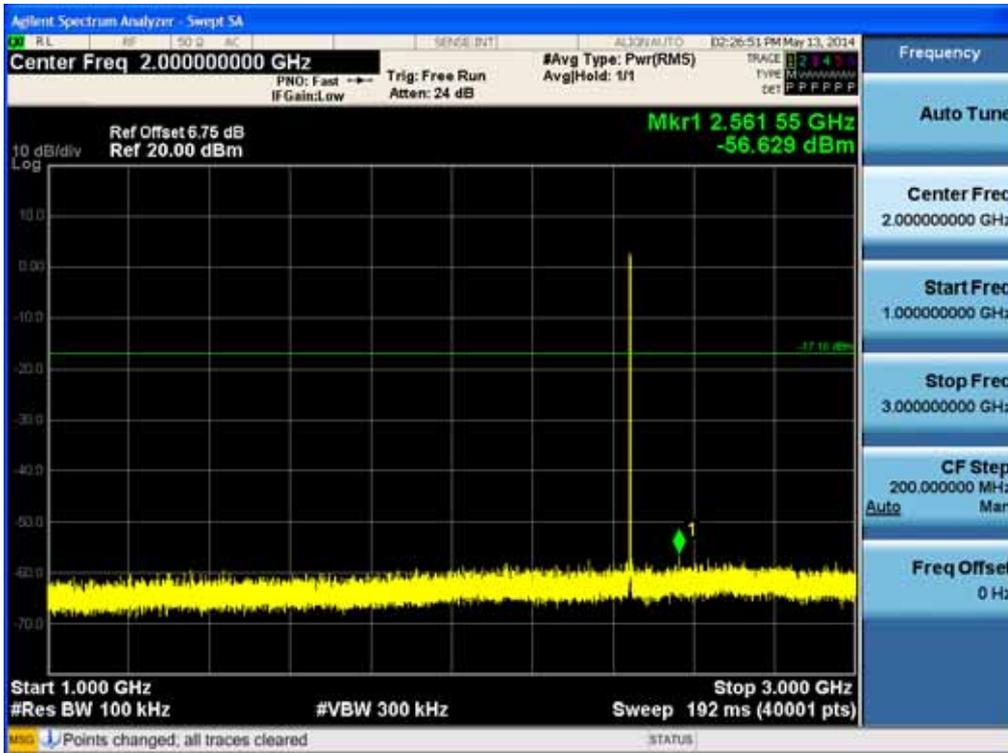


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNF0855P



Test Plots (8DPSK) - 3 GHz - 5 GHz
Spurious Emission (Mid-CH)

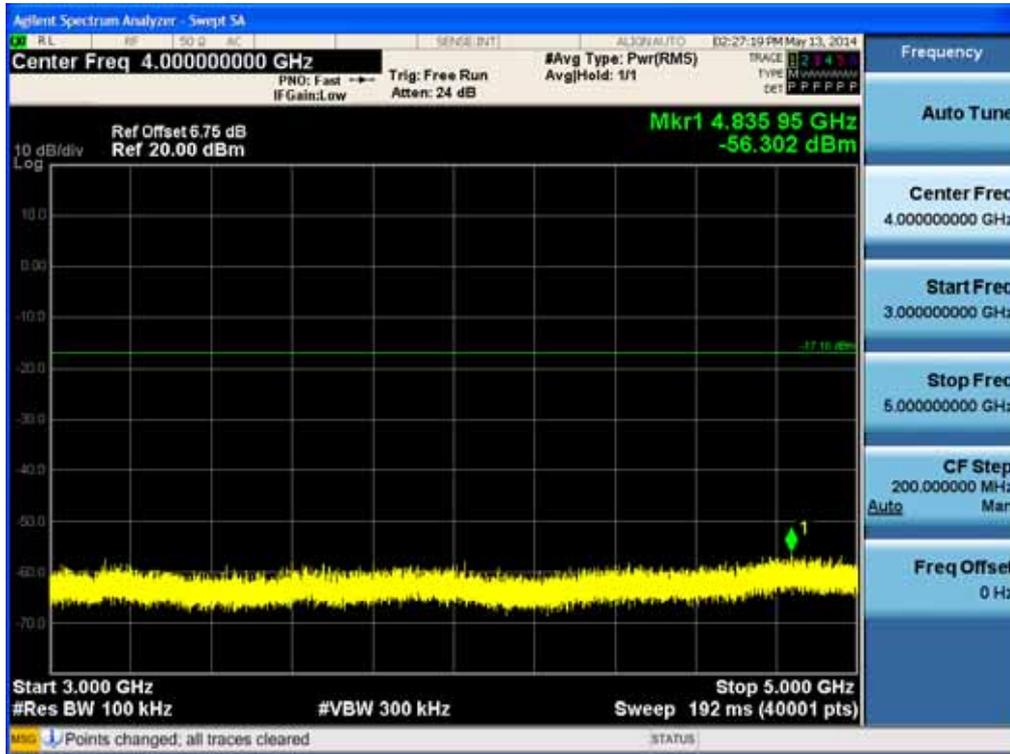


Test Plots (8DPSK) - 5 GHz - 7 GHz
Spurious Emission (Mid-CH)

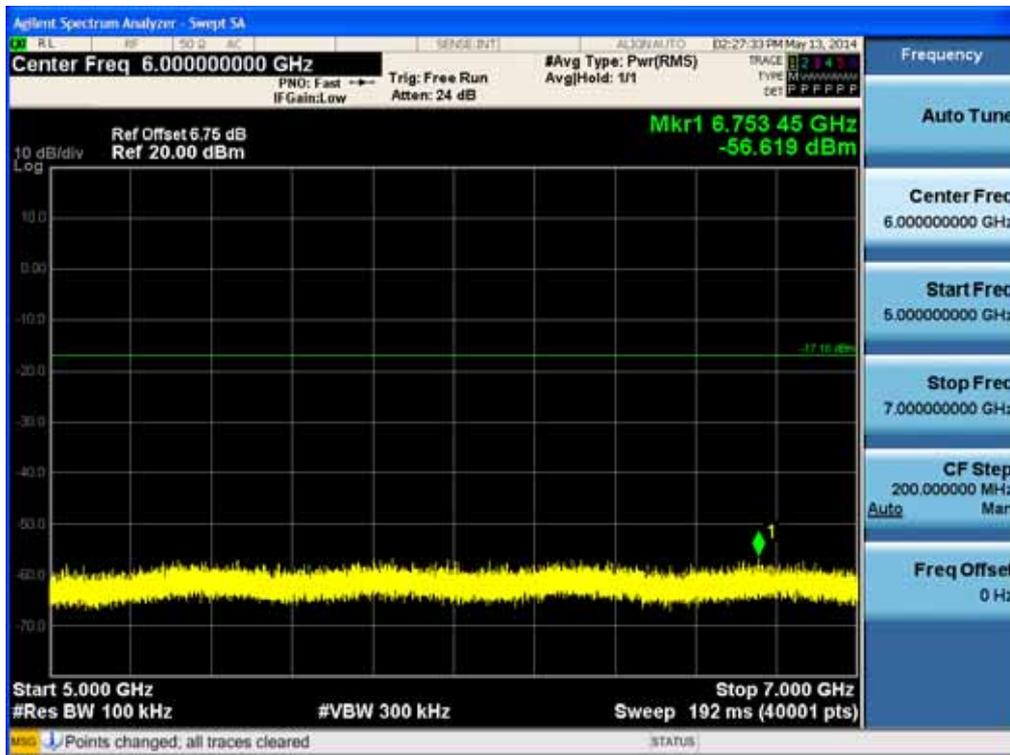


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNF0855P



Test Plots (8DPSK) - 7 GHz - 9 GHz
Spurious Emission (Mid-CH)

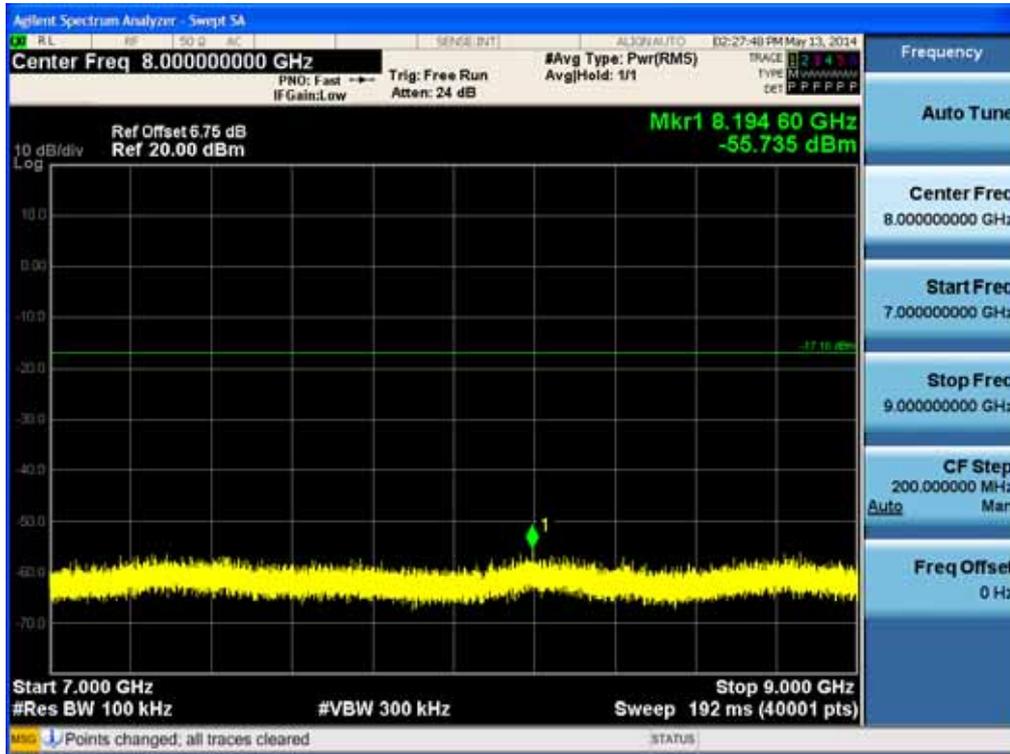


Test Plots (8DPSK) - 9 GHz - 11 GHz
Spurious Emission (Mid-CH)

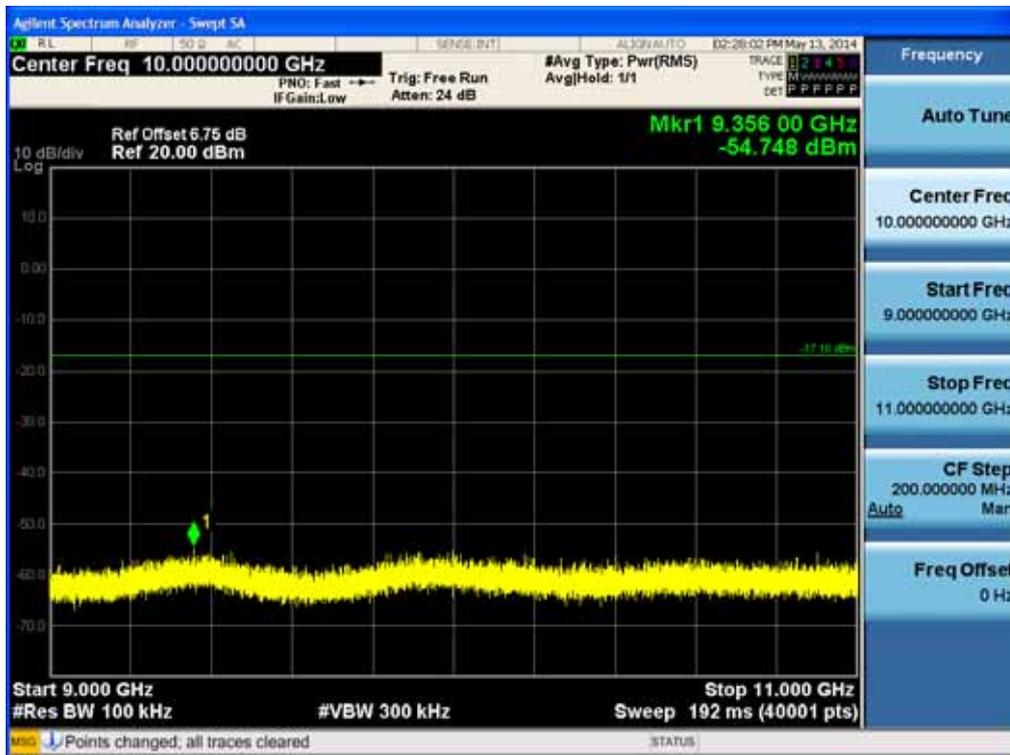


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNF0855P

Test Plots (8DPSK) - 11 GHz - 13 GHz
Spurious Emission (Mid-CH)

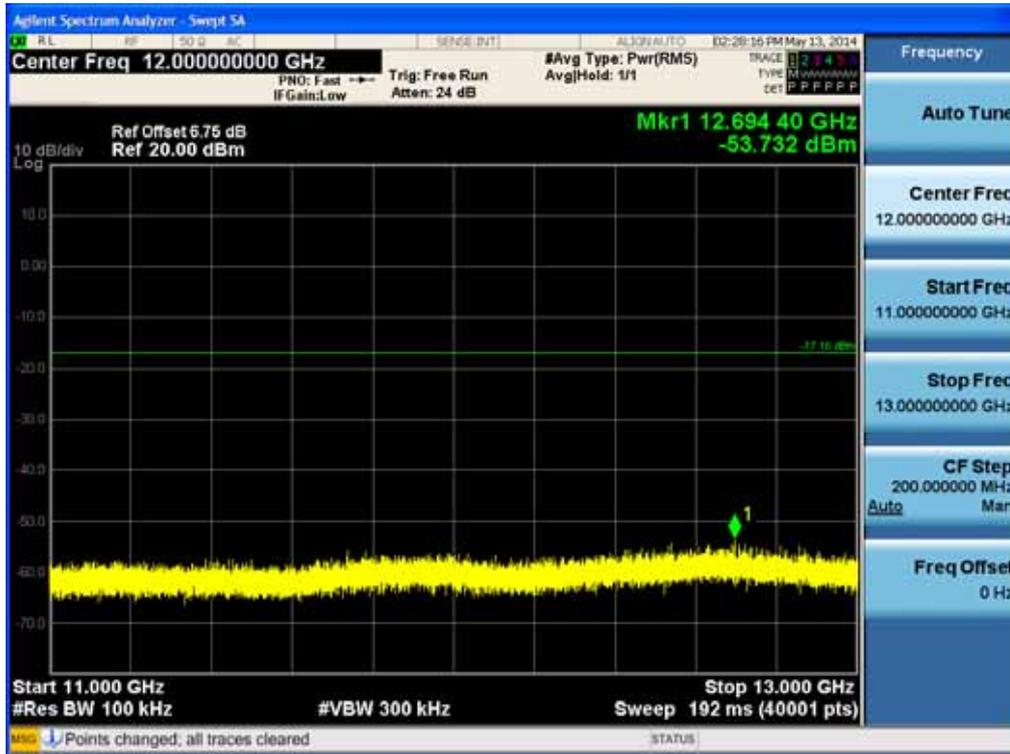


Test Plots (8DPSK) - 13 GHz – 15 GHz
Spurious Emission (Mid-CH)

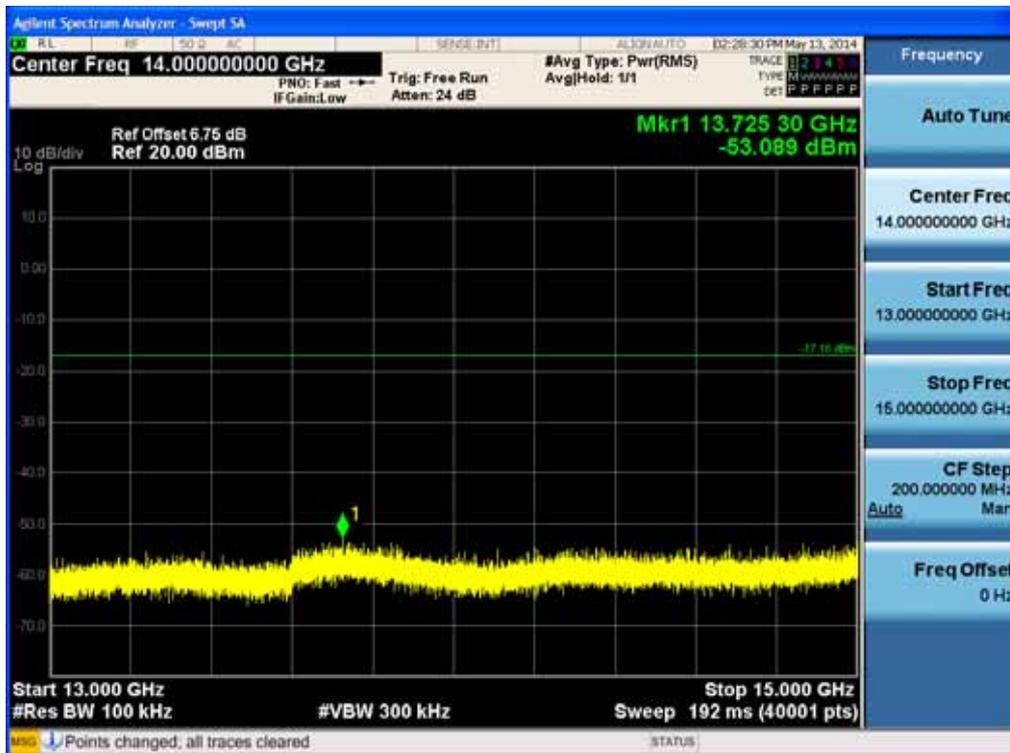


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNF855P



Test Plots (8DPSK) – 15 GHz - 17 GHz
Spurious Emission (Mid-CH)

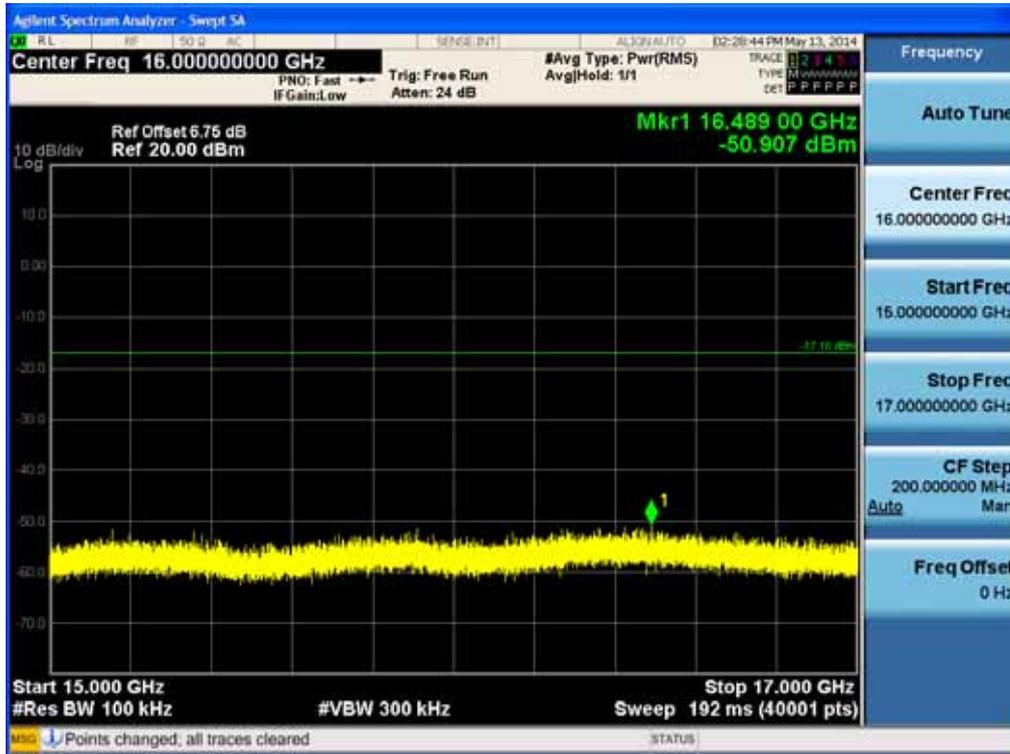


Test Plots (8DPSK) - 17 GHz - 19 GHz
Spurious Emission (Mid-CH)

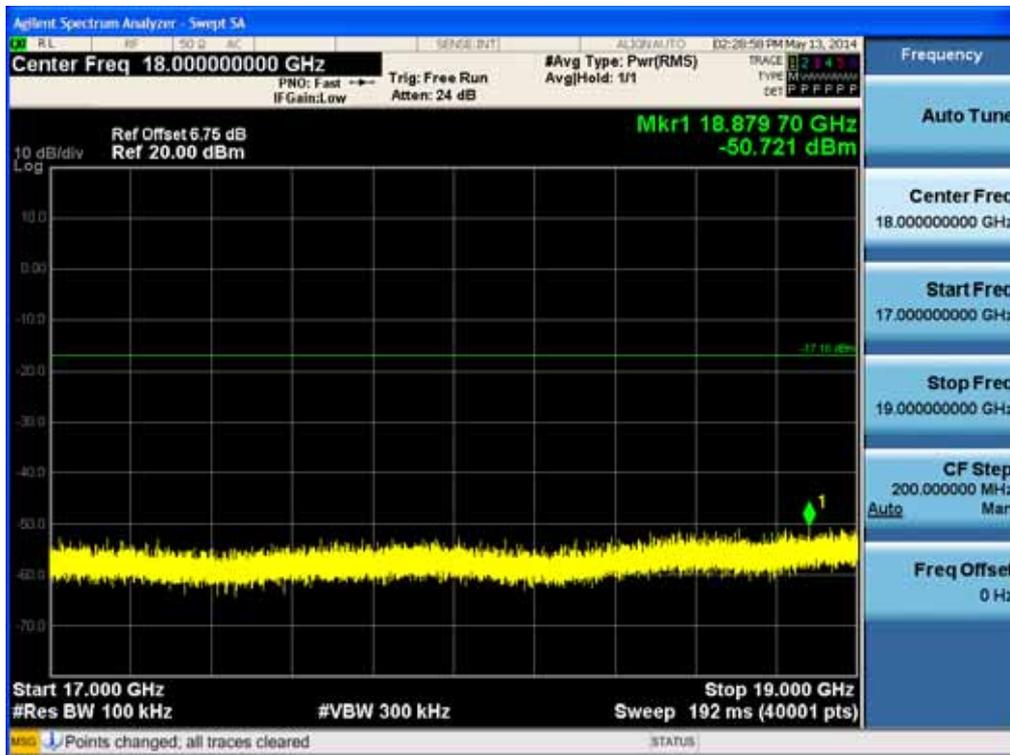


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNFD855P



Test Plots (8DPSK) - 19 GHz - 21 GHz
Spurious Emission (Mid-CH)

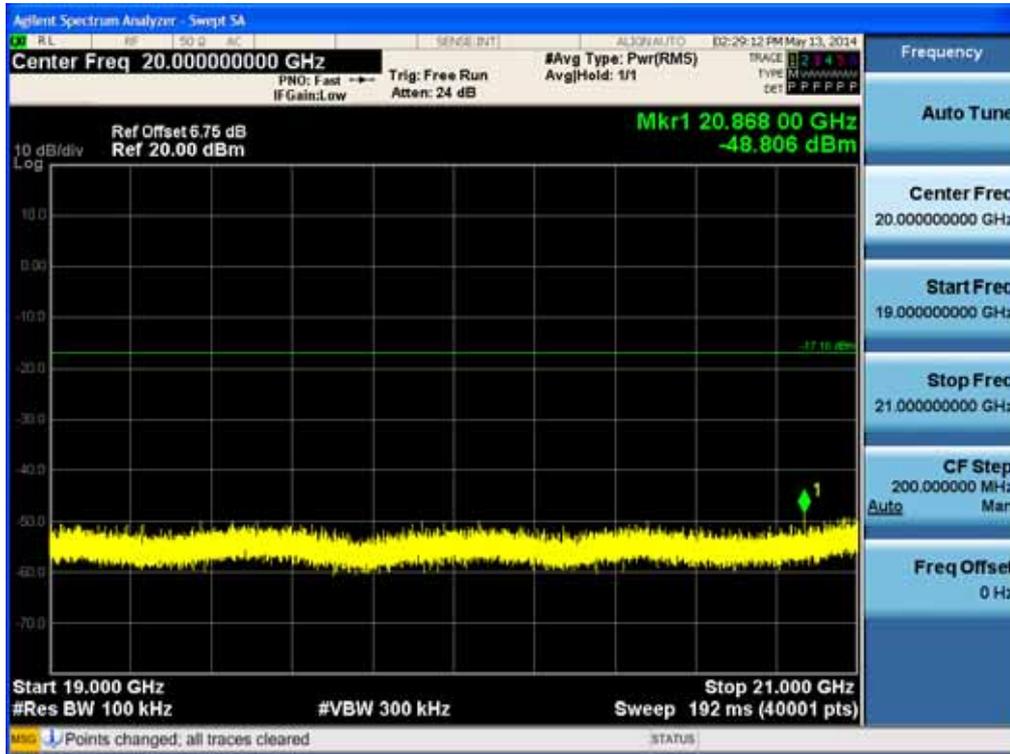


Test Plots (8DPSK) - 21 GHz - 23 GHz
Spurious Emission (Mid-CH)

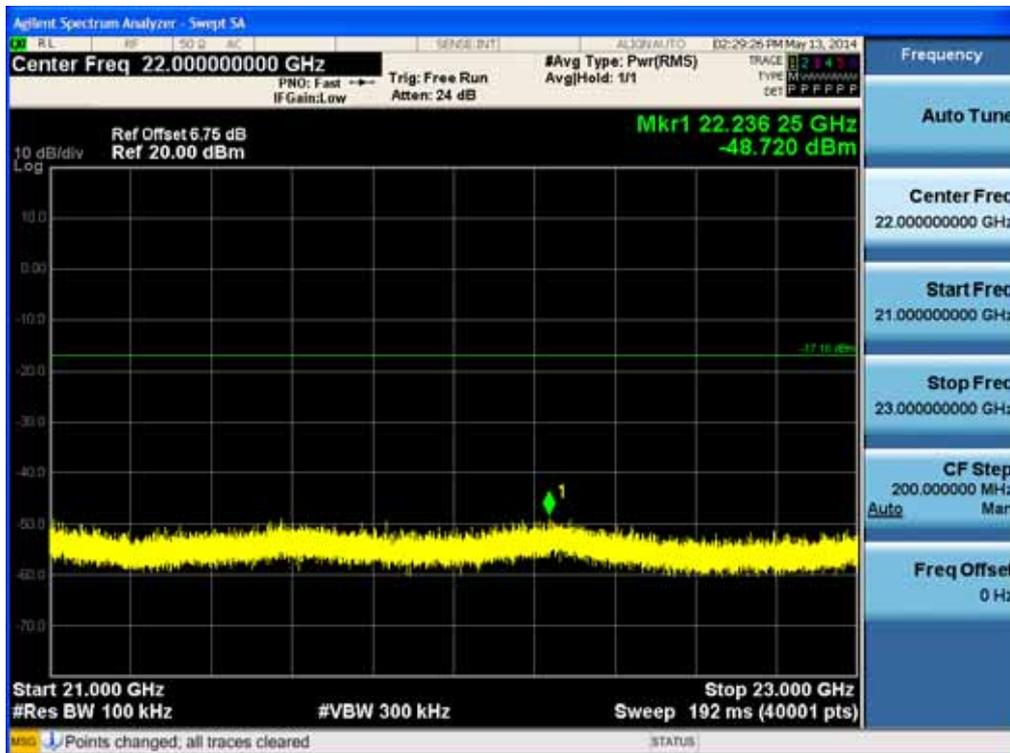

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNF0855P

Test Plots (8DPSK) - 23 GHz - 25 GHz
Spurious Emission (Mid-CH)

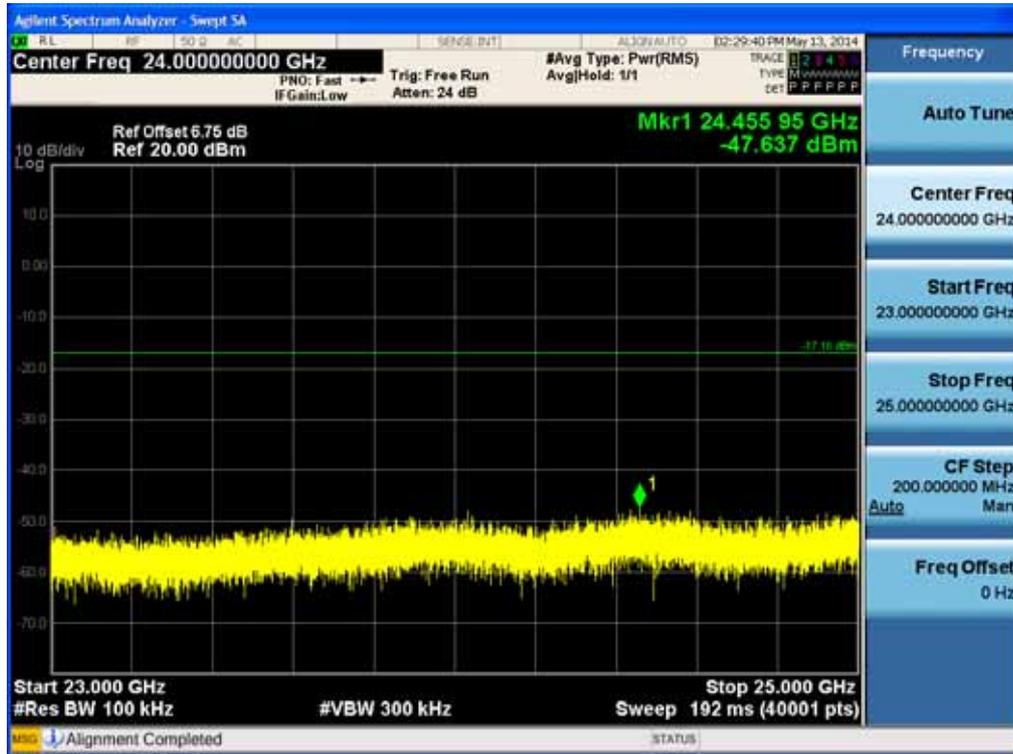

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNF855P



8.6.2 RADIATED SPURIOUS EMISSIONS


LIMIT : §15.247(d), §15.205, §15.209

1. 20dBc in any 100kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

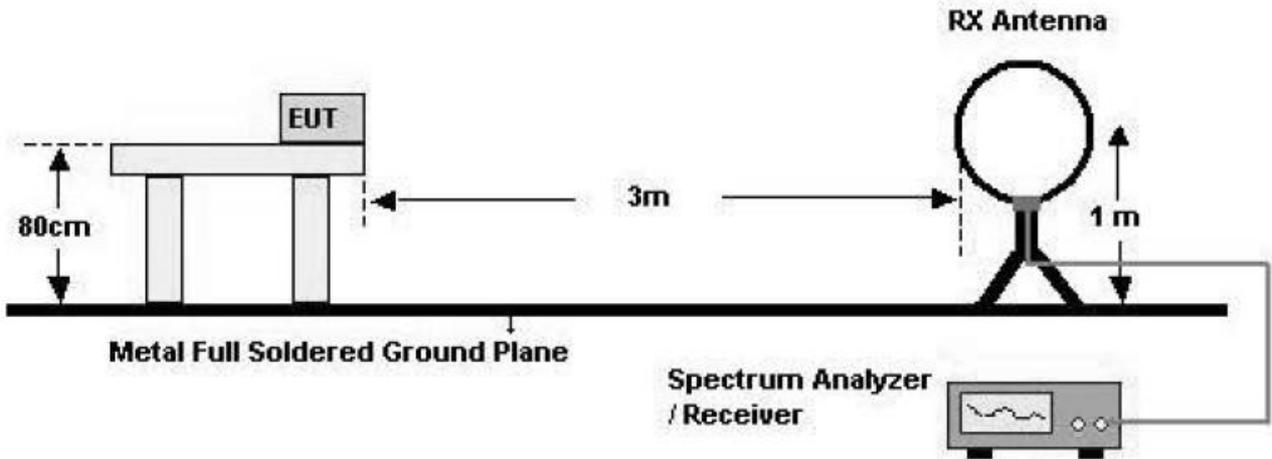

30 MHz - 1 GHz

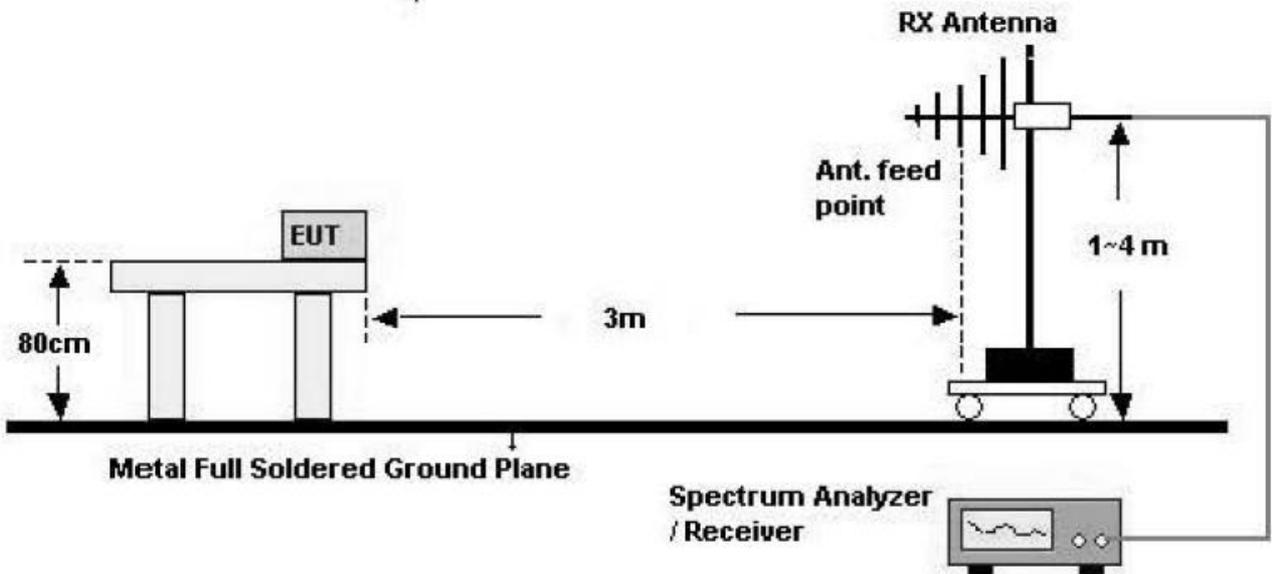

Above 1 GHz

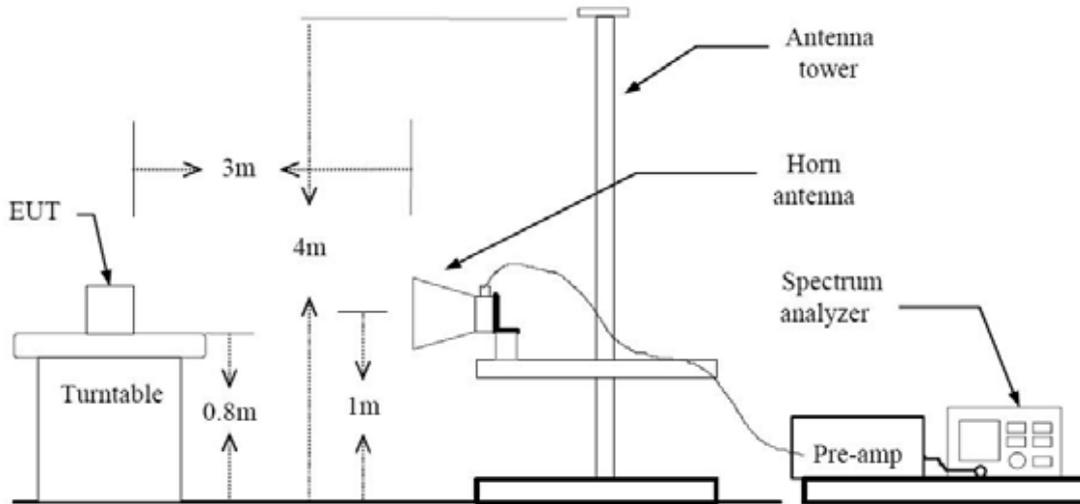

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. Spectrum Setting
 - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
 - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 kHz $\geq 1/\tau$ Hz, where τ = pulse width in seconds.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNF0855P



TEST RESULTS

9 kHz – 30MHz

Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB /m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 9 kHz to the 30MHz.
2. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
3. Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
4. Limit line = specific Limits (dBuV) + Distance extrapolation factor
5. This test is performed with hopping off.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.



TEST RESULTS

Below 1 GHz

Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB /m	dB	(H/V)	dB μ V/m	dB μ V/m	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 30 MHz to the 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
3. This test is performed with hopping off.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.



Stand alone

Above 1 GHz

Operation Mode: CH Low(GFSK)

Frequency [MHz]	Reading DBuV	A.F+CL-AMP GAIN [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	51.98	-4.32	V	47.66	73.98	26.32	PK
4804	39.15	-4.32	V	34.83	53.98	19.15	AV
7206	51.79	5.18	V	56.97	73.98	17.01	PK
7206	38.51	5.18	V	43.69	53.98	10.29	AV
4804	52.14	-4.32	H	47.82	73.98	26.16	PK
4804	38.43	-4.32	H	34.11	53.98	19.87	AV
7206	52.11	5.18	H	57.29	73.98	16.69	PK
7206	37.84	5.18	H	43.02	53.98	10.96	AV

Operation Mode: CH Low(8DPSK)

Frequency [MHz]	Reading DBuV	A.F+CL-AMP GAIN [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	52.32	-4.32	V	48.00	73.98	25.98	PK
4804	38.45	-4.32	V	34.13	53.98	19.85	AV
7206	51.14	5.18	V	56.32	73.98	17.66	PK
7206	37.78	5.18	V	42.96	53.98	11.02	AV
4804	52.43	-4.32	H	48.11	73.98	25.87	PK
4804	38.48	-4.32	H	34.16	53.98	19.82	AV
7206	51.50	5.18	H	56.68	73.98	17.30	PK
7206	37.95	5.18	H	43.13	53.98	10.85	AV



Operation Mode: CH Low($\pi/4$ DQPSK)

Frequency [MHz]	Reading DBuV	A.F+CL-AMP GAIN [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	51.98	-4.32	V	47.66	73.98	26.32	PK
4804	38.46	-4.32	V	34.14	53.98	19.84	AV
7206	51.89	5.18	V	57.07	73.98	16.91	PK
7206	37.93	5.18	V	43.11	53.98	10.87	AV
4804	52.02	-4.32	H	47.70	73.98	26.28	PK
4804	38.35	-4.32	H	34.03	53.98	19.95	AV
7206	51.88	5.18	H	57.06	73.98	16.92	PK
7206	37.87	5.18	H	43.05	53.98	10.93	AV

A:F: ANTENNA FACTOR

C:L: CABLE LOSS

AMP GAIN: AMPLIFIER GAIN

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
 - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 kHz $\geq 1/\tau$ Hz, where τ = pulse width in seconds.
We performed using a reduced video BW method was done with the analyzer in linear mode.
6. We have done Normal Mode and EDR Mode test.
7. This test is performed with hopping off.
8. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNF0855P



Operation Mode: CH Mid(GFSK)

Frequency [MHz]	Reading dBuV	A.F+CL-AMP GAIN [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	50.91	-3.95	V	46.96	73.98	27.02	PK
4882	37.59	-3.95	V	33.64	53.98	20.34	AV
7323	51.50	5.46	V	56.96	73.98	17.03	PK
7323	37.59	5.46	V	43.05	53.98	10.94	AV
4882	51.09	-3.95	H	47.14	73.98	26.84	PK
4882	37.55	-3.95	H	33.60	53.98	20.38	AV
7323	51.17	5.46	H	56.63	73.98	17.36	PK
7323	37.82	5.46	H	43.28	53.98	10.71	AV

Operation Mode: CH Mid(8DPSK)

Frequency [MHz]	Reading DBuV	A.F+CL-AMP GAIN [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	51.47	-3.95	V	47.52	73.98	26.46	PK
4882	37.53	-3.95	V	33.58	53.98	20.40	AV
7323	51.94	5.46	V	57.40	73.98	16.59	PK
7323	37.75	5.46	V	43.21	53.98	10.78	AV
4882	51.28	-3.95	H	47.33	73.98	26.65	PK
4882	37.54	-3.95	H	33.59	53.98	20.39	AV
7323	51.85	5.46	H	57.31	73.98	16.68	PK
7323	37.82	5.46	H	43.28	53.98	10.71	AV



Operation Mode: CH Mid($\pi/4$ DQPSK)

Frequency [MHz]	Reading DBuV	A.F+CL-AMP GAIN [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	50.49	-3.95	V	46.54	73.98	27.44	PK
4882	37.45	-3.95	V	33.50	53.98	20.48	AV
7323	51.20	5.46	V	56.66	73.98	17.33	PK
7323	37.56	5.46	V	43.02	53.98	10.97	AV
4882	51.47	-3.95	H	47.52	73.98	26.46	PK
4882	37.48	-3.95	H	33.53	53.98	20.45	AV
7323	51.74	5.46	H	57.20	73.98	16.79	PK
7323	37.75	5.46	H	43.21	53.98	10.78	AV

A:F: ANTENNA FACTOR

C:L: CABLE LOSS

AMP GAIN: AMPLIFIER GAIN

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
 - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 kHz $\geq 1/\tau$ Hz, where τ = pulse width in seconds.
We performed using a reduced video BW method was done with the analyzer in linear mode.
6. We have done Normal Mode and EDR Mode test.
7. This test is performed with hopping off.
8. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with			FCC ID: ZNF0855P



Operation Mode: CH High(GFSK)

Frequency [MHz]	Reading dBuV	A.F+CL-AMP GAIN [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	50.73	-3.49	V	47.24	73.98	26.74	PK
4960	37.06	-3.49	V	33.57	53.98	20.41	AV
7440	51.22	5.10	V	56.32	73.98	17.66	PK
7440	37.74	5.10	V	42.84	53.98	11.14	AV
4960	50.51	-3.49	H	47.02	73.98	26.96	PK
4960	36.92	-3.49	H	33.43	53.98	20.55	AV
7440	50.96	5.10	H	56.06	73.98	17.92	PK
7440	37.70	5.10	H	42.80	53.98	11.18	AV

Operation Mode: CH High(8DPSK)

Frequency [MHz]	Reading DBuV	A.F+CL-AMP GAIN [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	51.12	-3.49	V	47.63	73.98	26.35	PK
4960	37.43	-3.49	V	33.94	53.98	20.04	AV
7440	51.24	5.10	V	56.34	73.98	17.64	PK
7440	37.58	5.10	V	42.68	53.98	11.30	AV
4960	50.78	-3.49	H	47.29	73.98	26.69	PK
4960	37.25	-3.49	H	33.76	53.98	20.22	AV
7440	50.92	5.10	H	56.02	73.98	17.96	PK
7440	37.48	5.10	H	42.58	53.98	11.40	AV

Operation Mode: CH High ($\pi/4$ DQPSK)

Frequency [MHz]	Reading DBuV	A.F+CL-AMP GAIN [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	50.84	-3.49	V	47.35	73.98	26.63	PK
4960	36.94	-3.49	V	33.45	53.98	20.53	AV
7440	51.05	5.10	V	56.15	73.98	17.83	PK
7440	38.01	5.10	V	43.11	53.98	10.87	AV
4960	50.51	-3.49	H	47.02	73.98	26.96	PK
4960	36.88	-3.49	H	33.39	53.98	20.59	AV
7440	50.83	5.10	H	55.93	73.98	18.05	PK
7440	37.76	5.10	H	42.86	53.98	11.12	AV

A:F: ANTENNA FACTOR

C:L: CABLE LOSS

AMP GAIN: AMPLIFIER GAIN

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
 - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 kHz $\geq 1/\tau$ Hz, where τ = pulse width in seconds.
We performed using a reduced video BW method was done with the analyzer in linear mode.
6. We have done Normal Mode and EDR Mode test.
7. This test is performed with hopping off.
8. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.



With wireless Charge pad

Above 1 GHz

Operation Mode: CH Low(GFSK)

Frequency [MHz]	Reading DBuV	A.F+CL-AMP GAIN [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	51.55	-4.32	V	47.23	73.98	26.75	PK
4804	38.36	-4.32	V	34.04	53.98	19.94	AV
7206	51.58	5.18	V	56.76	73.98	17.22	PK
7206	38.04	5.18	V	43.22	53.98	10.76	AV
4804	51.83	-4.32	H	47.51	73.98	26.47	PK
4804	38.37	-4.32	H	34.05	53.98	19.93	AV
7206	51.05	5.18	H	56.23	73.98	17.75	PK
7206	38.06	5.18	H	43.24	53.98	10.74	AV

Operation Mode: CH Low(8DPSK)

Frequency [MHz]	Reading DBuV	A.F+CL-AMP GAIN [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	51.53	-4.32	V	47.21	73.98	26.77	PK
4804	38.28	-4.32	V	33.96	53.98	20.02	AV
7206	51.48	5.18	V	56.66	73.98	17.32	PK
7206	37.96	5.18	V	43.14	53.98	10.84	AV
4804	51.49	-4.32	H	47.17	73.98	26.81	PK
4804	38.43	-4.32	H	34.11	53.98	19.87	AV
7206	50.91	5.18	H	56.09	73.98	17.89	PK
7206	38.05	5.18	H	43.23	53.98	10.75	AV



Operation Mode: CH Low($\pi/4$ DQPSK)

Frequency [MHz]	Reading DBuV	A.F+CL-AMP GAIN [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4804	51.14	-4.32	V	46.82	73.98	27.16	PK
4804	38.48	-4.32	V	34.16	53.98	19.82	AV
7206	51.30	5.18	V	56.48	73.98	17.50	PK
7206	38.03	5.18	V	43.21	53.98	10.77	AV
4804	51.48	-4.32	H	47.16	73.98	26.82	PK
4804	38.36	-4.32	H	34.04	53.98	19.94	AV
7206	51.11	5.18	H	56.29	73.98	17.69	PK
7206	38.09	5.18	H	43.27	53.98	10.71	AV

A:F: ANTENNA FACTOR

C:L: CABLE LOSS

AMP GAIN: AMPLIFIER GAIN

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
 - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 kHz $\geq 1/\tau$ Hz, where τ = pulse width in seconds.
We performed using a reduced video BW method was done with the analyzer in linear mode.
6. We have done Normal Mode and EDR Mode test.
7. This test is performed with hopping off.
8. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNF855P



Operation Mode: CH Mid(GFSK)

Frequency [MHz]	Reading dBuV	A.F+CL-AMP GAIN [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	50.59	-3.95	V	46.64	73.98	27.34	PK
4882	37.86	-3.95	V	33.91	53.98	20.07	AV
7323	51.13	5.46	V	56.59	73.98	17.40	PK
7323	37.84	5.46	V	43.30	53.98	10.69	AV
4882	50.98	-3.95	H	47.03	73.98	26.95	PK
4882	38.15	-3.95	H	34.20	53.98	19.78	AV
7323	51.30	5.46	H	56.76	73.98	17.23	PK
7323	37.87	5.46	H	43.33	53.98	10.66	AV

Operation Mode: CH Mid(8DPSK)

Frequency [MHz]	Reading DBuV	A.F+CL-AMP GAIN [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	50.72	-3.95	V	46.77	73.98	27.21	PK
4882	38.02	-3.95	V	34.07	53.98	19.91	AV
7323	50.61	5.46	V	56.07	73.98	17.92	PK
7323	37.74	5.46	V	43.20	53.98	10.79	AV
4882	51.05	-3.95	H	47.10	73.98	26.88	PK
4882	38.08	-3.95	H	34.13	53.98	19.85	AV
7323	50.85	5.46	H	56.31	73.98	17.68	PK
7323	37.88	5.46	H	43.34	53.98	10.65	AV



Operation Mode: CH Mid($\pi/4$ DQPSK)

Frequency [MHz]	Reading DBuV	A.F+CL-AMP GAIN [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4882	50.92	-3.95	V	46.97	73.98	27.01	PK
4882	38.04	-3.95	V	34.09	53.98	19.89	AV
7323	51.14	5.46	V	56.60	73.98	17.39	PK
7323	37.92	5.46	V	43.38	53.98	10.61	AV
4882	51.05	-3.95	H	47.10	73.98	26.88	PK
4882	38.12	-3.95	H	34.17	53.98	19.81	AV
7323	51.23	5.46	H	56.69	73.98	17.30	PK
7323	37.96	5.46	H	43.42	53.98	10.57	AV

A:F: ANTENNA FACTOR

C:L: CABLE LOSS

AMP GAIN: AMPLIFIER GAIN

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
 - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 kHz $\geq 1/\tau$ Hz, where τ = pulse width in seconds.
We performed using a reduced video BW method was done with the analyzer in linear mode.
6. We have done Normal Mode and EDR Mode test.
7. This test is performed with hopping off.
8. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNF0855P



Operation Mode: CH High(GFSK)

Frequency [MHz]	Reading dBuV	A.F+CL-AMP GAIN [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	50.34	-3.49	V	46.85	73.98	27.13	PK
4960	37.81	-3.49	V	34.32	53.98	19.66	AV
7440	50.51	5.10	V	55.61	73.98	18.37	PK
7440	37.88	5.10	V	42.98	53.98	11.00	AV
4960	50.46	-3.49	H	46.97	73.98	27.01	PK
4960	37.99	-3.49	H	34.50	53.98	19.48	AV
7440	50.74	5.10	H	55.84	73.98	18.14	PK
7440	37.95	5.10	H	43.05	53.98	10.93	AV

Operation Mode: CH High(8DPSK)

Frequency [MHz]	Reading DBuV	A.F+CL-AMP GAIN [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	51.32	-3.49	V	47.83	73.98	26.15	PK
4960	37.79	-3.49	V	34.30	53.98	19.68	AV
7440	51.54	5.10	V	56.64	73.98	17.34	PK
7440	37.93	5.10	V	43.03	53.98	10.95	AV
4960	50.65	-3.49	H	47.16	73.98	26.82	PK
4960	38.05	-3.49	H	34.56	53.98	19.42	AV
7440	51.82	5.10	H	56.92	73.98	17.06	PK
7440	37.86	5.10	H	42.96	53.98	11.02	AV



Operation Mode: CH High ($\pi/4$ DQPSK)

Frequency [MHz]	Reading DBuV	A.F+CL-AMP GAIN [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4960	50.68	-3.49	V	47.19	73.98	26.79	PK
4960	37.81	-3.49	V	34.32	53.98	19.66	AV
7440	51.11	5.10	V	56.21	73.98	17.77	PK
7440	37.76	5.10	V	42.86	53.98	11.12	AV
4960	50.83	-3.49	H	47.34	73.98	26.64	PK
4960	37.98	-3.49	H	34.49	53.98	19.49	AV
7440	51.21	5.10	H	56.31	73.98	17.67	PK
7440	37.81	5.10	H	42.91	53.98	11.07	AV

A:F: ANTENNA FACTOR

C:L: CABLE LOSS

AMP GAIN: AMPLIFIER GAIN

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000 MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. Spectrum setting:
 - a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
 - b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 kHz $\geq 1/\tau$ Hz, where τ = pulse width in seconds.
We performed using a reduced video BW method was done with the analyzer in linear mode.
6. We have done Normal Mode and EDR Mode test.
7. This test is performed with hopping off.
8. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNF0855P

8.6.3 RADIATED RESTRICTED BAND EDGES

Test Requirements and limit, §15.247(d), §15.205, §15.209

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a) (See section 15.205(c)).

Stand alone

Operation Mode	Normal(GFSK)
Operating Frequency	2402 MHz , 2480 MHz
Channel No	CH 0, CH 78

Frequency [MHz]	Reading dBuV	A.F.+CL [dB]	Ant. Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	25.27	33.90	H	0	59.17	73.98	14.81	PK
2390.0	11.52	33.90	H	-24.73	20.69	53.98	33.29	AV
2390.0	25.55	33.90	V	0	59.45	73.98	14.53	PK
2390.0	11.59	33.90	V	-24.73	20.76	53.98	33.22	AV
2483.5	27.78	33.99	H	0	61.77	73.98	12.21	PK
2483.5	23.11	33.99	H	-24.73	32.37	53.98	21.61	AV
2483.5	24.33	33.99	V	0	58.32	73.98	15.66	PK
2483.5	17.22	33.99	V	-24.73	26.48	53.98	27.50	AV



Operation Mode EDR(8DPSK)
 Operating Frequency 2402 MHz , 2480 MHz
 Channel No CH 0, CH 78

Frequency [MHz]	Reading dBuV	A.F.+CL [dB]	Ant. Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	24.48	33.90	H	0	58.38	73.98	15.60	PK
2390.0	11.53	33.90	H	-24.73	20.70	53.98	33.28	AV
2390.0	24.65	33.90	V	0	58.55	73.98	15.43	PK
2390.0	11.67	33.90	V	-24.73	20.84	53.98	33.14	AV
2483.5	27.44	33.99	H	0	61.43	73.98	12.55	PK
2483.5	21.01	33.99	H	-24.73	30.27	53.98	23.71	AV
2483.5	24.12	33.99	V	0	58.11	73.98	15.87	PK
2483.5	15.87	33.99	V	-24.73	25.13	53.98	28.85	AV

Operation Mode EDR(π /4DQPSK)
 Operating Frequency 2402 MHz , 2480 MHz
 Channel No CH 0, CH 78

Frequency [MHz]	Reading dBuV	A.F.+CL [dB]	Ant. Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	24.66	33.90	H	0	58.56	73.98	15.42	PK
2390.0	11.68	33.90	H	-24.73	20.85	53.98	33.13	AV
2390.0	24.75	33.90	V	0	58.65	73.98	15.33	PK
2390.0	11.73	33.90	V	-24.73	20.90	53.98	33.08	AV
2483.5	27.30	33.99	H	0	61.29	73.98	12.69	PK
2483.5	20.97	33.99	H	-24.73	30.23	53.98	23.75	AV
2483.5	24.01	33.99	V	0	58.00	73.98	15.98	PK
2483.5	15.79	33.99	V	-24.73	25.05	53.98	28.93	AV

A:F: ANTENNA FACTOR
 C:L: CABLE LOSS
 AMP GAIN: AMPLIFIER GAIN

Notes:

1. Frequency range of measurement = 2483.5 MHz ~ 2500 MHz
2. Total = Fundamental Reading Value + Antenna Factor + Cable Loss + Duty Cycle Correction Factor

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC				FCC ID: ZNF0855P



3. Spectrum setting:

- a. Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
- b. AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 kHz $\geq 1/\tau$ Hz, where τ = pulse width in seconds.
We performed using a reduced video BW method was done with the analyzer in linear mode.

4. FYI : Duty Cycle Correction Factor (79 channel hopping)

- a. Time to cycle through all channels= $\Delta t = \tau$ [ms] x 79 channels = 229.100 ms, where τ = pulse width
- b. $100 \text{ ms} / \Delta t$ [ms] = $H \rightarrow$ Round up to next highest integer, $H' = 1$
- c. Worst Case Dwell Time = τ [ms] x $H' = 2.900$ ms
- d. Duty Cycle Correction = $20\log(\text{Worst Case Dwell Time} / 100\text{ms})$ dB = -30.752 dB

5. Duty Cycle Correction Factor(AFH mode – minimum channel number case - 20 channels)

- a. Time to cycle through all channels= $\Delta t = \tau$ [ms] x 20 channels = 58.00 ms, where τ = pulse width
- b. $100 \text{ ms} / \Delta t$ [ms] = $H \rightarrow$ Round up to next highest integer, $H' = 2$
- c. Worst Case Dwell Time = τ [ms] x $H' = 5.800$ ms
- d. Duty Cycle Correction(AFH) = $20\log(\text{Worst Case Dwell Time} / 100\text{ms})$ dB = -24.7314 dB
- e. We applied DCCF in the test result which hopping channel number is 20.

6. We have done Normal Mode, EDR Mode.

7. This test is performed with hopping off.

8. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNFD855P



With wireless Charge Pad

Operation Mode Normal(GFSK)
 Operating Frequency 2402 MHz, 2480 MHz
 Channel No CH 0, CH 78

Frequency [MHz]	Reading dBuV	A.F.+CL [dB]	Ant. Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	24.55	33.90	H	0	58.45	73.98	15.53	PK
2390.0	11.63	33.90	H	-24.73	20.80	53.98	33.18	AV
2390.0	25.13	33.90	V	0	59.03	73.98	14.95	PK
2390.0	11.59	33.90	V	-24.73	20.76	53.98	33.22	AV
2483.5	24.79	33.99	H	0	58.78	73.98	15.20	PK
2483.5	15.25	33.99	H	-24.73	24.51	53.98	29.47	AV
2483.5	24.49	33.99	V	0	58.48	73.98	15.50	PK
2483.5	15.13	33.99	V	-24.73	24.39	53.98	29.59	AV

Operation Mode EDR(8DPSK)
 Operating Frequency 2402 MHz , 2480 MHz
 Channel No CH 0, CH 78

Frequency [MHz]	Reading dBuV	A.F.+CL [dB]	Ant. Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	24.58	33.90	H	0	58.48	73.98	15.50	PK
2390.0	11.64	33.90	H	-24.73	20.81	53.98	33.17	AV
2390.0	24.66	33.90	V	0	58.56	73.98	15.42	PK
2390.0	11.62	33.90	V	-24.73	20.79	53.98	33.19	AV
2483.5	24.82	33.99	H	0	58.81	73.98	15.17	PK
2483.5	13.92	33.99	H	-24.73	23.18	53.98	30.80	AV
2483.5	24.17	33.99	V	0	58.16	73.98	15.82	PK
2483.5	13.96	33.99	V	-24.73	23.22	53.98	30.76	AV



Operation Mode	EDR($\pi/4$ DQPSK)
Operating Frequency	2402 MHz , 2480 MHz
Channel No	CH 0, CH 78

Frequency [MHz]	Reading dBuV	A.F.+CL [dB]	Ant. Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2390.0	24.37	33.90	H	0	58.27	73.98	15.71	PK
2390.0	11.66	33.90	H	-24.73	20.83	53.98	33.15	AV
2390.0	24.63	33.90	V	0	58.53	73.98	15.45	PK
2390.0	11.56	33.90	V	-24.73	20.73	53.98	33.25	AV
2483.5	24.14	33.99	H	0	58.13	73.98	15.85	PK
2483.5	13.83	33.99	H	-24.73	23.09	53.98	30.89	AV
2483.5	24.41	33.99	V	0	58.40	73.98	15.58	PK
2483.5	13.98	33.99	V	-24.73	23.24	53.98	30.74	AV

A:F: ANTENNA FACTOR

C:L: CABLE LOSS

AMP GAIN: AMPLIFIER GAIN

Notes:

- Frequency range of measurement = 2483.5 MHz ~ 2500 MHz
- Total = Fundamental Reading Value + Antenna Factor + Cable Loss + Duty Cycle Correction Factor
- Spectrum setting:
 - Peak Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 MHz.
 - AV Setting 1 GHz – 26 GHz, RBW = 1 MHz, VBW = 1 kHz $\geq 1/\tau$ Hz, where τ = pulse width in seconds.
We performed using a reduced video BW method was done with the analyzer in linear mode.
- FYI : Duty Cycle Correction Factor (79 channel hopping)
 - Time to cycle through all channels= $\Delta t = \tau$ [ms] x 79 channels = 229.100 ms, where τ = pulse width
 - $100 \text{ ms} / \Delta t$ [ms] = $H \rightarrow$ Round up to next highest integer, $H' = 1$
 - Worst Case Dwell Time = τ [ms] x $H' = 2.900$ ms
 - Duty Cycle Correction = $20\log$ (Worst Case Dwell Time/ 100ms) dB = -30.752 dB
- Duty Cycle Correction Factor(AFH mode – minimum channel number case - 20 channels)
 - Time to cycle through all channels= $\Delta t = \tau$ [ms] x 20 channels = 58.00 ms, where τ = pulse width
 - $100 \text{ ms} / \Delta t$ [ms] = $H \rightarrow$ Round up to next highest integer, $H' = 2$
 - Worst Case Dwell Time = τ [ms] x $H' = 5.800$ ms
 - Duty Cycle Correction(AFH) = $20\log$ (Worst Case Dwell Time/ 100ms) dB = -24.7314 dB
 - We applied DCCF in the test result which hopping channel number is 20.
- We have done Normal Mode, EDR Mode.
- This test is performed with hopping off.
- We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT				www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE	Phone with	FCC ID: ZNF0855P	



8.7 POWERLINE CONDUCTED EMISSIONS

LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolt (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.
5. This test is performed with hopping off and 3 Mbps (3-DH5) data rate of No.39 channel.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNF855P


Stand alone
RESULT PLOTS
 Conducted Emissions (Line 1)

HCT TEST Report

Common Information

EUT: LG-D855P
 Manufacturer: LG
 Test Site: SHIELD ROOM
 Operating Conditions: BT MODE
 Operator Name: KS KANG

FCC CLASS B

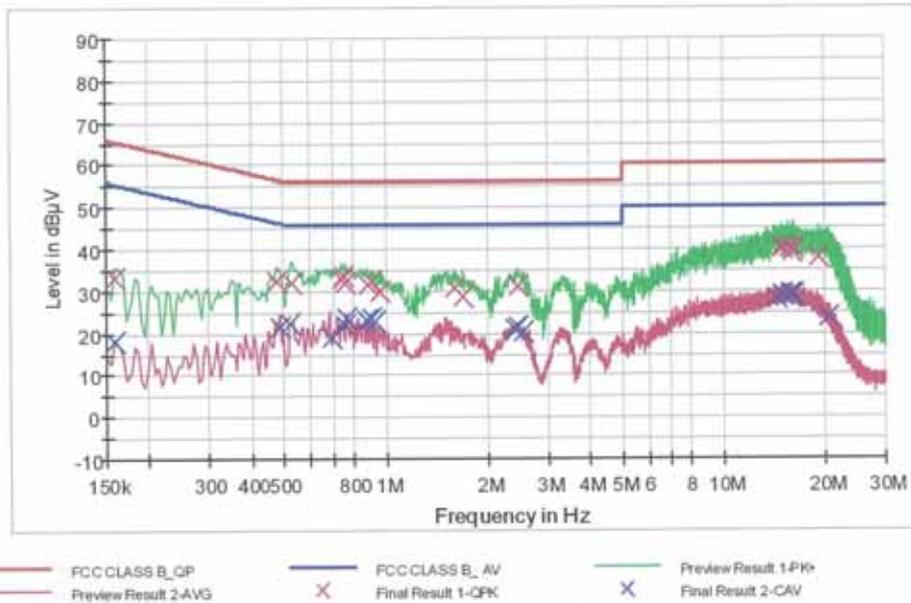

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.159000	33.1	9.000	Off	L1	9.7	32.4	65.5
0.474000	32.6	9.000	Off	L1	9.7	23.8	56.4
0.527000	31.9	9.000	Off	L1	9.7	24.1	56.0
0.738500	32.9	9.000	Off	L1	9.7	23.1	56.0
0.747500	33.6	9.000	Off	L1	9.7	22.4	56.0
0.761000	32.1	9.000	Off	L1	9.7	23.9	56.0
0.887000	31.8	9.000	Off	L1	9.7	24.2	56.0
0.905000	32.5	9.000	Off	L1	9.7	23.5	56.0
0.959000	29.8	9.000	Off	L1	9.7	26.2	56.0
1.607000	30.9	9.000	Off	L1	9.8	25.1	56.0
1.697000	28.7	9.000	Off	L1	9.8	27.3	56.0
2.457500	31.1	9.000	Off	L1	9.9	24.9	56.0
14.904500	40.3	9.000	Off	L1	10.6	19.7	60.0
14.913500	40.1	9.000	Off	L1	10.6	19.9	60.0
15.593000	40.0	9.000	Off	L1	10.7	20.0	60.0
15.917000	39.0	9.000	Off	L1	10.7	21.0	60.0

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
16.907000	40.1	9.000	Off	L1	10.7	19.9	60.0
18.995000	38.0	9.000	Off	L1	10.9	22.0	60.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.159000	18.2	9.000	Off	L1	9.7	37.3	55.5
0.487500	21.5	9.000	Off	L1	9.7	24.7	46.2
0.522500	22.5	9.000	Off	L1	9.7	23.5	46.0
0.689000	19.0	9.000	Off	L1	9.7	27.0	46.0
0.761000	22.0	9.000	Off	L1	9.7	24.0	46.0
0.770000	23.4	9.000	Off	L1	9.7	22.6	46.0
0.878000	23.1	9.000	Off	L1	9.7	22.9	46.0
0.905000	23.4	9.000	Off	L1	9.7	22.6	46.0
0.927500	22.9	9.000	Off	L1	9.7	23.1	46.0
2.412500	21.0	9.000	Off	L1	9.9	25.0	46.0
2.457500	21.5	9.000	Off	L1	9.9	24.5	46.0
2.529500	20.2	9.000	Off	L1	9.9	25.8	46.0
14.319500	28.2	9.000	Off	L1	10.6	21.8	50.0
14.913500	29.0	9.000	Off	L1	10.6	21.0	50.0
15.800000	29.2	9.000	Off	L1	10.7	20.8	50.0
15.917000	28.6	9.000	Off	L1	10.7	21.4	50.0
16.007000	29.0	9.000	Off	L1	10.7	21.0	50.0
20.345000	23.8	9.000	Off	L1	10.9	26.2	50.0

Conducted Emissions (Line 2)

EMI Auto Test(2)


1 / 2

HCT TEST Report

Common Information

EUT: LG-D855P
 Manufacturer: LG
 Test Site: SHIELD ROOM
 Operating Conditions: BT MODE
 Operator Name: KS KANG

FCC CLASS B

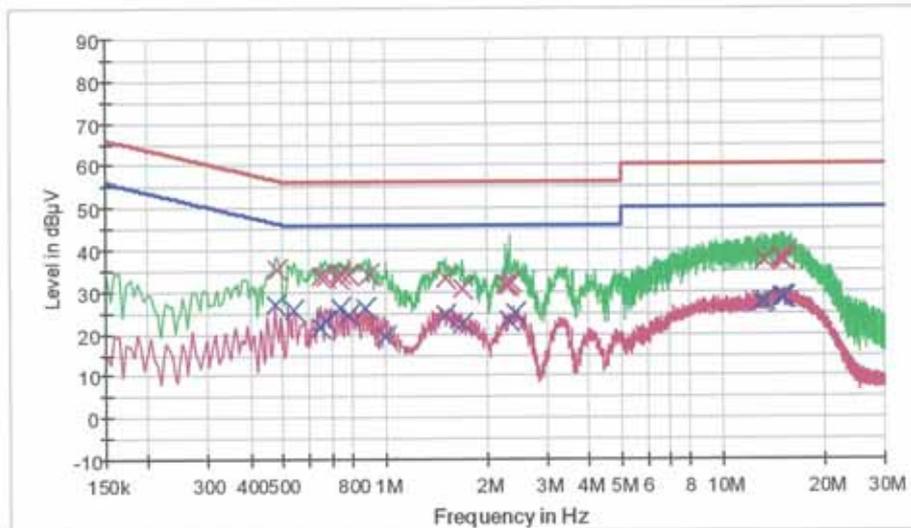

— FCCCLASS B_QP — FCCCLASS B_AV — Preview Result 1-PK
— Preview Result 2-AVG x Final Result 1-CPK x Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.483000	35.6	9.000	Off	N	9.7	20.7	56.3
0.648500	33.5	9.000	Off	N	9.7	22.5	56.0
0.666500	33.9	9.000	Off	N	9.7	22.1	56.0
0.734000	33.3	9.000	Off	N	9.7	22.8	56.0
0.743000	34.4	9.000	Off	N	9.7	21.6	56.0
0.783500	34.3	9.000	Off	N	9.7	21.7	56.0
0.900500	34.0	9.000	Off	N	9.8	22.0	56.0
1.503500	33.3	9.000	Off	N	9.8	22.7	56.0
1.697000	30.6	9.000	Off	N	9.8	25.4	56.0
2.282000	31.6	9.000	Off	N	9.9	24.4	56.0
2.327000	31.6	9.000	Off	N	9.9	24.4	56.0
2.340500	32.3	9.000	Off	N	9.9	23.7	56.0
13.293500	37.3	9.000	Off	N	10.5	22.7	60.0
14.936000	38.1	9.000	Off	N	10.6	21.9	60.0
14.945000	38.1	9.000	Off	N	10.6	21.9	60.0
14.963000	38.1	9.000	Off	N	10.6	21.9	60.0

5/13/2014

11:10:00

EMI Auto Test(2)

2 / 2

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
15.066500	38.1	9.000	Off	N	10.6	21.9	60.0
15.233000	37.6	9.000	Off	N	10.6	22.4	60.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.474000	26.8	9.000	Off	N	9.7	19.6	46.4
0.540500	25.9	9.000	Off	N	9.7	20.1	46.0
0.644000	21.6	9.000	Off	N	9.7	24.4	46.0
0.671000	23.3	9.000	Off	N	9.7	22.7	46.0
0.743000	26.0	9.000	Off	N	9.7	20.0	46.0
0.783500	24.4	9.000	Off	N	9.7	21.6	46.0
0.878000	26.0	9.000	Off	N	9.8	20.0	46.0
1.004000	19.3	9.000	Off	N	9.8	26.7	46.0
1.503500	24.5	9.000	Off	N	9.8	21.4	46.0
1.697000	22.3	9.000	Off	N	9.8	23.7	46.0
2.327000	23.3	9.000	Off	N	9.9	22.7	46.0
2.435000	24.7	9.000	Off	N	9.9	21.3	46.0
13.032500	27.4	9.000	Off	N	10.5	22.6	50.0
13.293500	27.8	9.000	Off	N	10.5	22.2	50.0
14.936000	28.8	9.000	Off	N	10.6	21.2	50.0
14.963000	28.8	9.000	Off	N	10.6	21.2	50.0
15.066500	28.7	9.000	Off	N	10.6	21.3	50.0
15.233000	28.5	9.000	Off	N	10.6	21.5	50.0

5/13/2014

11:10:00



With wires charge pad

RESULT PLOTS

Conducted Emissions (Line 1)

EMI Auto Test(2)


1 / 2

HCT TEST Report

Common Information

EUT: LG-D855P
 Manufacturer: LG (Wireless Charger)
 Test Site: SHIELD ROOM
 Operating Conditions: BT MODE
 Operator Name: KS KANG

FCC CLASS B

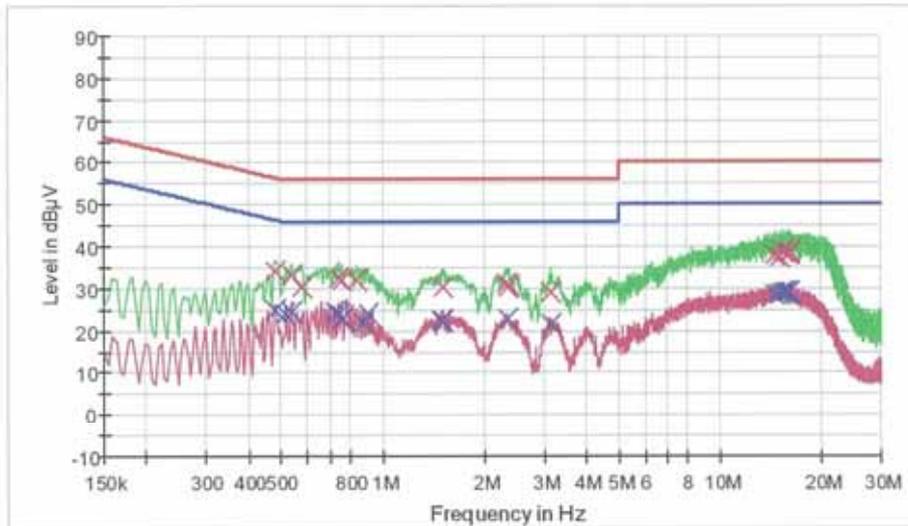

— FCCCLASS B_OP
 — FCCCLASS B_AV
 — Preview Result 1-PK
— Preview Result 2-AVG
 x Final Result 1-CPK
 x Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.483000	34.3	9.000	Off	L1	9.7	22.1	56.3
0.540500	33.2	9.000	Off	L1	9.7	22.8	56.0
0.576500	30.2	9.000	Off	L1	9.7	25.8	56.0
0.738500	32.4	9.000	Off	L1	9.7	23.6	56.0
0.756500	32.0	9.000	Off	L1	9.7	24.0	56.0
0.842000	31.8	9.000	Off	L1	9.7	24.2	56.0
1.517000	30.1	9.000	Off	L1	9.8	25.9	56.0
2.331500	31.0	9.000	Off	L1	9.9	25.0	56.0
2.340500	30.5	9.000	Off	L1	9.9	25.5	56.0
2.358500	30.4	9.000	Off	L1	9.9	25.6	56.0
2.372000	30.8	9.000	Off	L1	9.9	25.2	56.0
3.141500	29.3	9.000	Off	L1	10.0	26.7	56.0
14.499500	38.0	9.000	Off	L1	10.6	22.0	60.0
15.120500	37.4	9.000	Off	L1	10.7	22.6	60.0
15.386000	38.6	9.000	Off	L1	10.7	21.4	60.0
15.863000	38.2	9.000	Off	L1	10.7	21.8	60.0

5/19/2014

9:43:53

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT			www.hct.co.kr
Test Report No. HCT-R-1405-F015-1	Date of Issue: May 29, 2014	EUT Type: Cellular/PCS Bluetooth, WLAN, NFC	GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with	FCC ID: ZNF0855P

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
16.038500	38.4	9.000	Off	L1	10.7	21.6	60.0
16.052000	38.6	9.000	Off	L1	10.7	21.4	60.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.483000	24.9	9.000	Off	L1	9.7	21.4	46.3
0.518000	24.0	9.000	Off	L1	9.7	22.0	46.0
0.540500	24.4	9.000	Off	L1	9.7	21.6	46.0
0.720500	24.4	9.000	Off	L1	9.7	21.6	46.0
0.738500	23.9	9.000	Off	L1	9.7	22.1	46.0
0.756500	22.9	9.000	Off	L1	9.7	23.1	46.0
0.878000	22.1	9.000	Off	L1	9.7	23.9	46.0
0.905000	23.8	9.000	Off	L1	9.7	22.2	46.0
1.499000	22.4	9.000	Off	L1	9.8	23.6	46.0
1.517000	22.4	9.000	Off	L1	9.8	23.6	46.0
2.354000	22.7	9.000	Off	L1	9.9	23.3	46.0
3.141500	21.5	9.000	Off	L1	10.0	24.5	46.0
14.499500	28.8	9.000	Off	L1	10.6	21.2	50.0
15.120500	28.7	9.000	Off	L1	10.7	21.3	50.0
15.359000	29.2	9.000	Off	L1	10.7	20.8	50.0
15.386000	29.2	9.000	Off	L1	10.7	20.8	50.0
15.813500	28.9	9.000	Off	L1	10.7	21.1	50.0
16.052000	29.2	9.000	Off	L1	10.7	20.8	50.0


Conducted Emissions (Line 2)

HCT TEST Report

Common Information

EUT: LG-D855P
 Manufacturer: LG (Wireless Charger)
 Test Site: SHIELD ROOM
 Operating Conditions: BT MODE
 Operator Name: KS KANG

FCC CLASS B

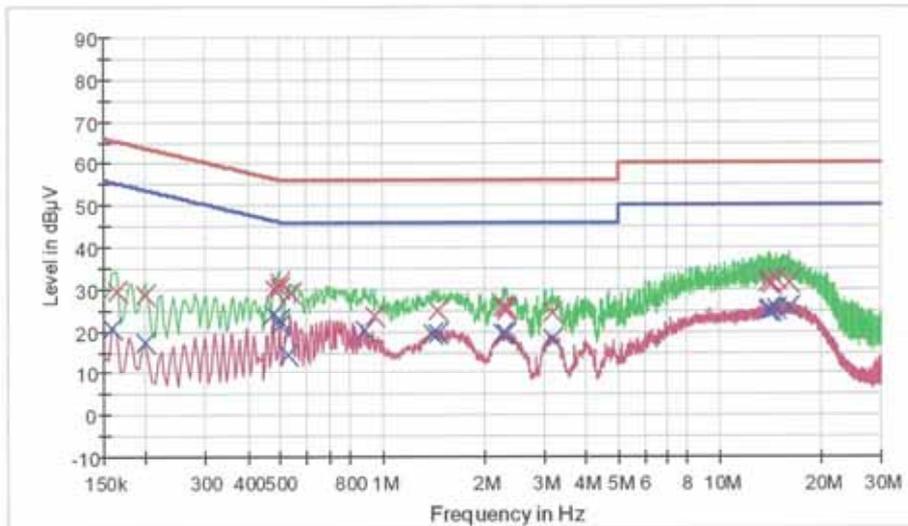

— FCC CLASS B_QP — FCC CLASS B_AV — Preview Result 1-PK
— Preview Result 2-AVG X Final Result 1-QPK X Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.163500	29.7	9.000	Off	N	9.7	35.6	65.3
0.199500	28.8	9.000	Off	N	9.7	34.8	63.6
0.483000	30.1	9.000	Off	N	9.7	26.2	56.3
0.496500	31.8	9.000	Off	N	9.7	24.3	56.1
0.500000	30.5	9.000	Off	N	9.7	25.5	56.0
0.540500	28.9	9.000	Off	N	9.7	27.1	56.0
0.950000	23.5	9.000	Off	N	9.8	32.5	56.0
1.467500	25.0	9.000	Off	N	9.8	31.0	56.0
2.282000	25.9	9.000	Off	N	9.9	30.1	56.0
2.318000	25.8	9.000	Off	N	9.9	30.2	56.0
2.327000	24.7	9.000	Off	N	9.9	31.3	56.0
3.195500	24.4	9.000	Off	N	10.0	31.6	56.0
13.847000	31.6	9.000	Off	N	10.5	28.4	60.0
13.991000	32.1	9.000	Off	N	10.5	27.9	60.0
14.279000	31.1	9.000	Off	N	10.6	28.9	60.0
14.625500	32.2	9.000	Off	N	10.6	27.8	60.0

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
14.688500	32.3	9.000	Off	N	10.6	27.7	60.0
16.083500	31.6	9.000	Off	N	10.6	28.4	60.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.159000	20.6	9.000	Off	N	9.7	34.9	55.5
0.199500	17.5	9.000	Off	N	9.7	36.1	53.6
0.478500	24.0	9.000	Off	N	9.7	22.4	46.4
0.496500	22.6	9.000	Off	N	9.7	23.5	46.1
0.500000	21.3	9.000	Off	N	9.7	24.7	46.0
0.527000	14.2	9.000	Off	N	9.7	31.8	46.0
0.891500	20.2	9.000	Off	N	9.8	25.8	46.0
1.413500	19.4	9.000	Off	N	9.8	26.6	46.0
1.467500	19.2	9.000	Off	N	9.8	26.8	46.0
2.282000	19.4	9.000	Off	N	9.9	26.6	46.0
2.313500	19.5	9.000	Off	N	9.9	26.5	46.0
3.195500	18.2	9.000	Off	N	10.0	27.8	46.0
13.847000	24.9	9.000	Off	N	10.5	25.1	50.0
13.991000	25.3	9.000	Off	N	10.5	24.8	50.0
14.279000	24.7	9.000	Off	N	10.6	25.3	50.0
14.625500	25.4	9.000	Off	N	10.6	24.6	50.0
14.688500	25.3	9.000	Off	N	10.6	24.7	50.0
16.083500	25.6	9.000	Off	N	10.6	24.4	50.0

9. LIST OF TEST EQUIPMENT

9.1 LIST OF TEST EQUIPMENT(Conducted Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Calibration Due	Serial No.
Rohde & Schwarz	ENV216/ LISN	01/29/2014	Annual	01/29/2015	100073
Agilent	E4440A/ Spectrum Analyzer	04/09/2014	Annual	04/09/2015	US45303008
Agilent	N9020A/ SIGNAL ANALYZER	05/23/2014	Annual	05/23/2015	MY51110063
Agilent	N1911A/Power Meter	01/24/2014	Annual	01/24/2015	MY45100523
Agilent	N1921A /POWER SENSOR	07/11/2013	Annual	07/11/2014	MY45241059
Hewlett Packard	11636B/Power Divider	10/22/2013	Annual	10/22/2014	11377
Agilent	87300B/Directional Coupler	12/18/2013	Annual	12/18/2014	3116A03621
Hewlett Packard	11667B / Power Splitter	05/29/2013	Annual	05/29/2014	05001
DIGITAL	EP-3010 /DC POWER SUPPLY	10/29/2013	Annual	10/29/2014	3110117
ITECH	IT6720 / DC POWER SUPPLY	11/05/2013	Annual	11/05/2014	0100021562870011 99
TESCOM	TC-3000C / BLUETOOTH TESTER	04/24/2014	Annual	04/24/2015	3000C000276
Rohde & Schwarz	CBT / BLUETOOTH TESTER	05/07/2014	Annual	05/07/2015	100422
Agilent	8493C / Attenuator(10 dB)	07/24/2013	Annual	07/24/2014	76649
WEINSCHEL	2-3 / Attenuator(3 dB)	10/28/2013	Annual	10/28/2014	BR0617

Note: This equipment (E4440A/ Spectrum Analyzer) is used after 04/09/2014 and actual calibration date is 04/09/2014

This equipment (TC-3000C / BLUETOOTH TESTER) is used after 04/24/2014 and actual calibration date is 04/24/2014

This equipment (CBT / BLUETOOTH TESTER) is used after 05/07/2014 and actual calibration date is 05/07/2014

9.2 LIST OF TEST EQUIPMENT(Radiated Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Calibration Due	Serial No.
Schwarzbeck	VULB 9160/ TRILOG Antenna	12/17/2012	Biennial	12/17/2014	3150
Rohde & Schwarz	ESCI / EMI TEST RECEIVER	01/24/2014	Annual	01/24/2015	100584
HD	MA240/ Antenna Position Tower	N/A	N/A	N/A	556
EMCO	1050/ Turn Table	N/A	N/A	N/A	114
HD GmbH	HD 100/ Controller	N/A	N/A	N/A	13
HD GmbH	KMS 560/ SlideBar	N/A	N/A	N/A	12
Rohde & Schwarz	SCU-18/ Signal Conditioning Unit	09/10/2013	Annual	09/10/2014	10094
CERNEX	CBL18265035 / POWER AMP	07/24/2013	Annual	07/24/2014	22966
CERNEX	CBL26405040 / POWER AMP	04/04/2014	Annual	04/04/2015	19660
Schwarzbeck	BBHA 9120D/ Horn Antenna	07/05/2013	Biennial	07/05/2015	1151
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	10/30/2012	Biennial	10/30/2014	BBHA9170124
Rohde & Schwarz	FSP / Spectrum Analyzer	01/24/2014	Annual	01/24/2015	839117/011
Wainwright Instrument	WHF3.0/18G-10EF / High Pass Filter	02/03/2014	Annual	02/03/2015	F6
Wainwright Instrument	WHNX6.0/26.5G-6SS / High Pass Filter	04/09/2014	Annual	04/09/2015	1
Wainwright Instrument	WHNX7.0/18G-8SS / High Pass Filter	04/04/2014	Annual	04/04/2015	29
Wainwright Instrument	WRCJ2400/2483.5-2370/2520-60/14SS / Band Reject Filter	06/24/2013	Annual	06/24/2014	1
TESCOM	TC-3000C / BLUETOOTH TESTER	04/24/2014	Annual	04/24/2015	3000C000276
Rohde & Schwarz	CBT / BLUETOOTH TESTER	05/07/2014	Annual	05/07/2015	100422
Rohde & Schwarz	LOOP ANTENNA	08/14/2012	Biennial	08/14/2014	100179
CERNEX	CBL06185030 / POWER AMP	07/24/2013	Annual	07/24/2014	22965
CERNEX	CBLU1183540 / POWER AMP	07/24/2013	Annual	07/24/2014	22964

Note:

This equipment (WHNX6.0/26.5G-6SS / High Pass Filter) is used after 04/09/2014 and actual calibration date is 04/09/2014

This equipment (TC-3000C / BLUETOOTH TESTER) is used after 04/24/2014 and actual calibration date is 04/24/2014

This equipment (CBT / BLUETOOTH TESTER) is used after 05/07/2014 and actual calibration date is 05/07/2014