

# RF TEST REPORT

Test item : Multi Band GSM/WCDMA/LTE Phone with Bluetooth, WLAN and NFC  
Model No. : LG-D855V, LGD855V, D855V, LG-D855v, LGD855v, D855v  
Order No. : DTNC1411-04837  
Date of receipt : 2014-11-05  
Test duration : 2014-11-07 ~ 2014-11-17  
Date of issue : 2014-11-20  
Use of report : FCC Original Grant

Applicant : LG Electronics MobileComm U.S.A., Inc.  
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Test laboratory : DT&C Co., Ltd.  
42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 449-935

Test specification : FCC Part 15 Subpart C 247  
Test environment : See appended test report  
Test result :  Pass  Fail

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DT&C Co., Ltd.

Tested by:



Engineer  
HoonPyo Lee

Reviewed by:



Technical Manager  
Geunki Son

## Test Report Version

| Test Report No. | Date          | Description   |
|-----------------|---------------|---------------|
| DRTFCC1411-1476 | Nov. 20, 2014 | Initial issue |
|                 |               |               |
|                 |               |               |
|                 |               |               |
|                 |               |               |
|                 |               |               |
|                 |               |               |
|                 |               |               |
|                 |               |               |
|                 |               |               |

# Table of Contents

|  |           |
|--|-----------|
| <b>1. GENERAL INFORMATION .....</b>                                      | <b>4</b>  |
| <b>2. EUT DESCRIPTION .....</b>  | <b>4</b>  |
| 2.1 Support equipments .....   | 4         |
| <b>3. SUMMARY OF TESTS .....</b>   | <b>5</b>  |
| <b>4. TEST METHODOLOGY .....</b>   | <b>6</b>  |
| 4.1 EUT CONFIGURATION .....  | 6         |
| 4.2 EUT EXERCISE .....   | 6         |
| 4.3 GENERAL TEST PROCEDURES .....  | 6         |
| 4.4 DESCRIPTION OF TEST MODES .....                                      | 6         |
| <b>5. INSTRUMENT CALIBRATION .....</b>                                   | <b>7</b>  |
| <b>6. FACILITIES AND ACCREDITATIONS .....</b>                            | <b>7</b>  |
| 6.1 FACILITIES .....   | 7         |
| 6.2 EQUIPMENT .....  | 7         |
| <b>7. ANTENNA REQUIREMENTS .....</b>                                     | <b>7</b>  |
| <b>8. TEST RESULT .....</b>  | <b>8</b>  |
| 8.1 6dB Bandwidth Measurement.....                                       | 8         |
| 8.2 Maximum Peak Conducted Output Power .....                            | 11        |
| 8.3 Maximum Power Spectral Density.....                                  | 14        |
| 8.4 Out of Band Emissions at the Band Edge/ Conducted Spurious Emissions | 17        |
| 8.5 Radiated Measurement.....  | 26        |
| 8.5.1 Radiated Spurious Emissions.....                                   | 26        |
| 8.6 POWERLINE CONDUCTED EMISSIONS.....                                   | 29        |
| 8.7 Occupied Bandwidth .....   | 32        |
| <b>9. LIST OF TEST EQUIPMENT .....</b>                                   | <b>33</b> |
| <b>APPENDIX I .....</b>  | <b>34</b> |
| <b>APPENDIX II .....</b>   | <b>35</b> |

## 1. GENERAL INFORMATION

**Applicant** : LG Electronics MobileComm U.S.A., Inc.

**Address** : 1000 Sylvan Avenue, Englewood Cliffs NJ 07632

**FCC ID** : ZNFD855V

**EUT** : Multi Band GSM/WCDMA/LTE Phone with Bluetooth, WLAN and NFC

**Model** : LG-D855V

**Additional Model(s)** : LGD855V, D855V, LG-D855v, LGD855v, D855v

**Data of Test** : 2014-11-07 ~ 2014-11-17

**Contact person** : Jacob Cho

## 2. EUT DESCRIPTION

|                              |   |
|------------------------------|---|
| <b>Product</b>               | Multi Band GSM/WCDMA/LTE Phone with Bluetooth, WLAN and NFC   |
| <b>Model Name</b>            | LG-D855V, LGD855V, D855V, LG-D855v, LGD855v, D855v<br>※ 6 models are same mechanical, electrical and functional.<br>※ The only difference is the model name, which are changed for marketing purpose. |
| <b>Power Supply</b>          | DC 3.8V   |
| <b>Battery type</b>          | Standard Battery: Lithium Ion Battery   |
| <b>Frequency Range</b>       | 2402 ~ 2480MHz (40 channels)  |
| <b>Max. RF Output Power</b>  | 2.92 dBm  |
| <b>Modulation Type</b>       | GFSK  |
| <b>Antenna Specification</b> | Antenna Type: Internal Antenna<br>Gain: -3.090 dBi(PK)  |

### 2.1 Support equipments

| Equipment        | Model No. | Serial No. | Manufacturer | Note      |
|------------------|-----------|------------|--------------|-----------|
| Wireless Charger | WCP-300   | N/A        | LG           | BEJWCP300 |

Note: The above equipments were supported by manufacturer.

### 3. SUMMARY OF TESTS

| FCC Part Section(s)             | RSS Section(s)  | Parameter   | Limit                  | Test Condition    | Status Note 1         |
|---------------------------------|-----------------|---|------------------------|-------------------|-----------------------|
| <b>I. Transmitter Mode (TX)</b> |                 |   |                        |                   |                       |
| 15.247(a)                       | RSS-210 [A8.2]  | 6 dB Bandwidth  | > 500 kHz              | Conducted         | C                     |
| 15.247(b)                       | RSS-210 [A8.4]  | Transmitter Output Power  | < 1Watt                |                   | C                     |
| 15.247(d)                       | RSS-210 [A8.5]  | Out of Band Emissions / Band Edge   | 20dBc in any 100kHz BW |                   | C                     |
| 15.247(e)                       | RSS-210 [A8.2]  | Transmitter Power Spectral Density  | < 8dBm / 3kHz          |                   | C                     |
| -                               | RSS Gen [4.6.1] | Occupied Bandwidth (99%)  | RSS-Gen(4.6.1)         |                   | NA                    |
| 15.205<br>15.209                | RSS-210 [A8.5]  | General Field Strength Limits (Restricted Bands and Radiated Emission Limits) | < FCC 15.209 limits    | Radiated          | C <sup>Note 2,3</sup> |
| 15.207                          | RSS-Gen [7.2.4] | AC Conducted Emissions  | < FCC 15.207 limits    | AC Line Conducted | C                     |
| 15.203                          | -               | Antenna Requirements  | FCC 15.203             | -                 | C                     |

Note 1: C=Comply NC=Not Comply NT=Not Tested NA=Not Applicable

Note 2: This test item was performed in each axis and the worst case data was reported.

Note 3: There is no normal battery cover and there is only one kind of wireless charging battery cover for this handset. So per KDB 648474 D03 v01r02, the spurious emissions were tested with the wireless charging battery cover and with both not charging and charging conditions.

For wireless charging condition, the handset is placed on the representative charging pad under normal conditions and in a simulated call configuration.

## 4. TEST METHODOLOGY

Generally the tests were performed according to the KDB558074 v03r02. And ANSI C63.10-2009 was used to reference appropriate EUT setup and maximizing procedures of radiated spurious emission and AC line conducted emission testing.

### 4.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 4.2 EUT EXERCISE

The EUT was operated in the test mode to fix the TX frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

### 4.3 GENERAL TEST PROCEDURES

#### Conducted Emissions

According to the requirements in Section 6.2 of ANSI C63.10, the EUT is placed on the non-conductive table, which is 0.8 m above ground plane and the conducted emissions from the EUT are measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and Average detector.

#### Radiated Emissions

The EUT is placed on a non-conductive table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the highest emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.3 of ANSI C63.10

### 4.4 DESCRIPTION OF TEST MODES

The EUT has been tested with the operating condition for maximizing the emission characteristics. A test program is used to control the EUT for staying in continuous transmitting. The Bluetooth low energy mode and below low, middle and high channels were tested and reported.

| Test Mode | Channel | Frequency [MHz] |
|-----------|---------|-----------------|
| BT LE     | 0       | 2402            |
|           | 19      | 2440            |
|           | 39      | 2480            |

## 5. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

## 6. FACILITIES AND ACCREDITATIONS

### 6.1 FACILITIES

The open area test site(OATS) or semi anechoic chamber and conducted measurement facility used to collect the radiated and conducted test data are located at the 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 449-935. The site is constructed in conformance with the requirements.

- Semi anechoic chamber registration Number: 678747

### 6.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and peak, quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

## 7. ANTENNA REQUIREMENTS

### According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

**The internal antenna is attached on the main PCB using the special spring tension.**

**Therefore this E.U.T Complies with the requirement of §15.203**

## 8. TEST RESULT

### 8.1 6dB Bandwidth Measurement

#### Test Requirements and limit, §15.247(a) & RSS-210[A8.2]

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

**The minimum permissible 6dB bandwidth is 500 kHz.**

#### ■ TEST CONFIGURATION

Refer to the APPENDIX I.

#### ■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer and used following test procedure of **KDB558074 v03r02**.

1. Set resolution bandwidth (RBW) = 100 KHz
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.  
**(RBW:100KHz/VBW:300KHz)**
3. Detector = **Peak**.
4. Trace mode = **max hold**.
5. Sweep = **auto couple**.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


#### ■ TEST RESULTS: **Comply**

| Test Mode | Frequency [MHz] | Test Results [KHz] |
|-----------|-----------------|--------------------|
| LE        | 2402            | 683.4              |
|           | 2440            | 688.2              |
|           | 2480            | 674.8              |

RESULTPLOTS


6 dB Bandwidth

Test Frequency: 2402 MHz

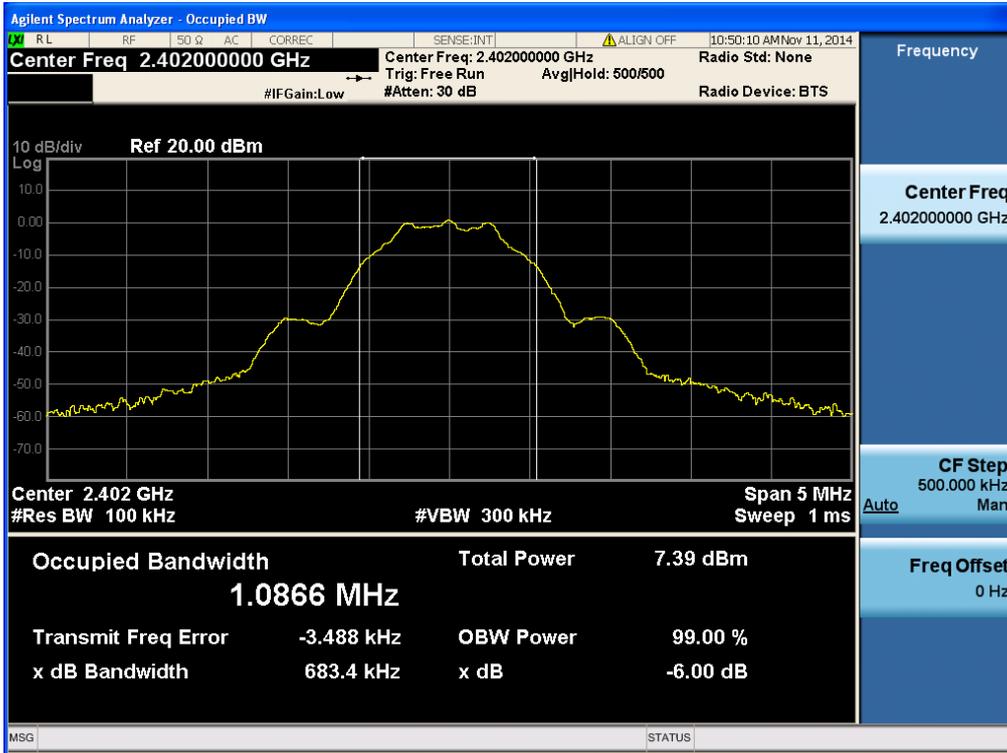


6 dB Bandwidth

Test Frequency: 2440 MHz

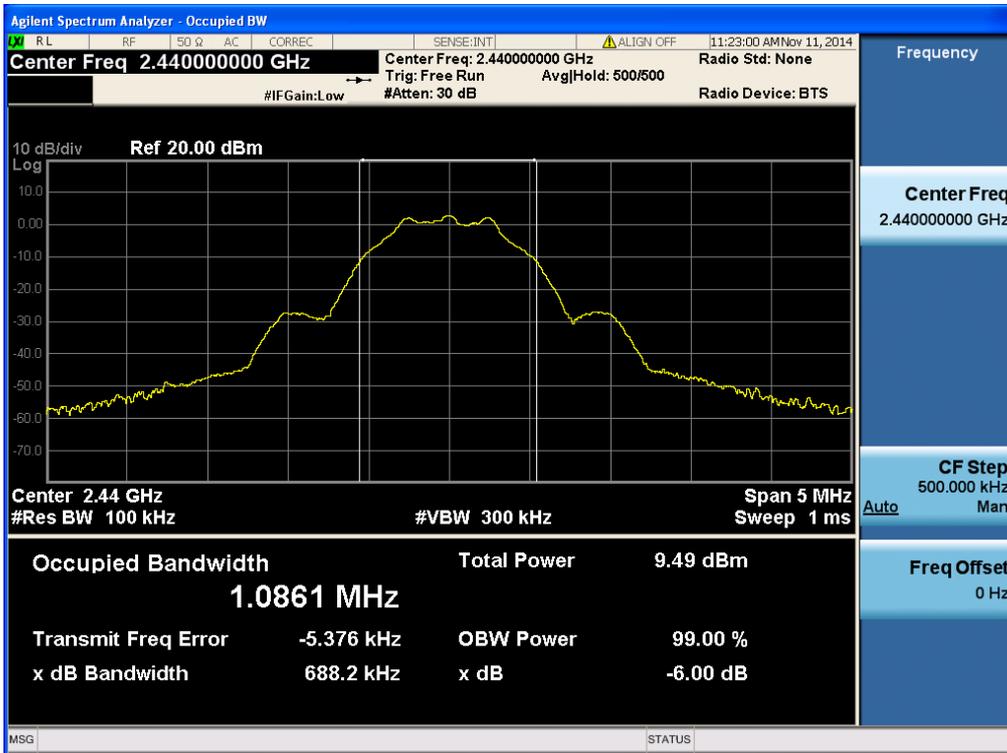

6 dB Bandwidth

Test Frequency: 2480 MHz

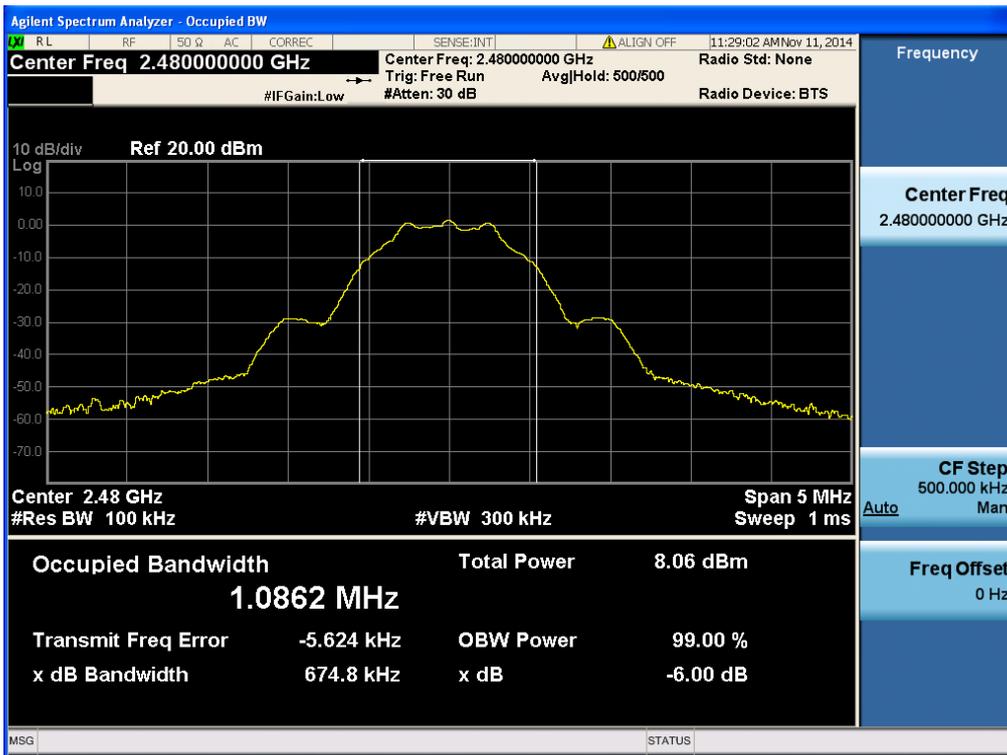

## 8.2 Maximum Peak Conducted Output Power

### Test Requirements and limit, §15.247(b) & RSS-210[A8.4]

A transmitter antenna terminal of EUT is connected to the input of a spectrum analyzer.

Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies.

**The maximum permissible conducted output power is 1 Watt.**

#### ■ TEST CONFIGURATION

Refer to the APPENDIX I.

#### ■ TEST CONFIGURATION:

Maximum Peak Conducted Output Power is measured using Measurement Procedure Option1 of KDB558074 v03r02.

1. Set the RBW  $\geq$  DTS bandwidth. **Actual RBW = 2 MHz**
2. Set VBW  $\geq$  3 x RBW. **Actual VBW = 6 MHz**
3. Set span  $\geq$  3 x RBW.
4. Sweep time = **auto couple**
5. Detector = **peak**
6. Trace mode = **max hold**
7. Allow trace to fully stabilize
8. Use peak marker function to determine the peak amplitude level.


#### ■ TEST RESULTS: **Comply**

| Test Mode | Test Results[dBm] |         |         |
|-----------|-------------------|---------|---------|
|           | 2402MHz           | 2440MHz | 2480MHz |
| LE        | 0.89              | 2.92    | 1.52    |

RESULT PLOTS


Peak Output Power

Test Frequency: 2402 MHz

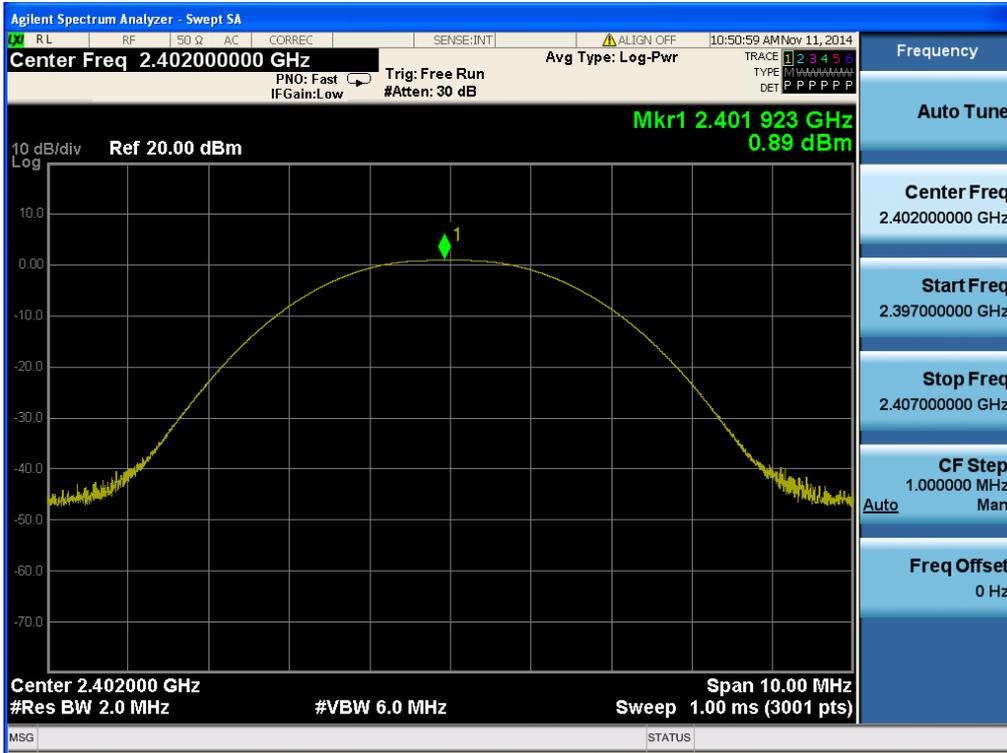


Peak Output Power

Test Frequency: 2440 MHz

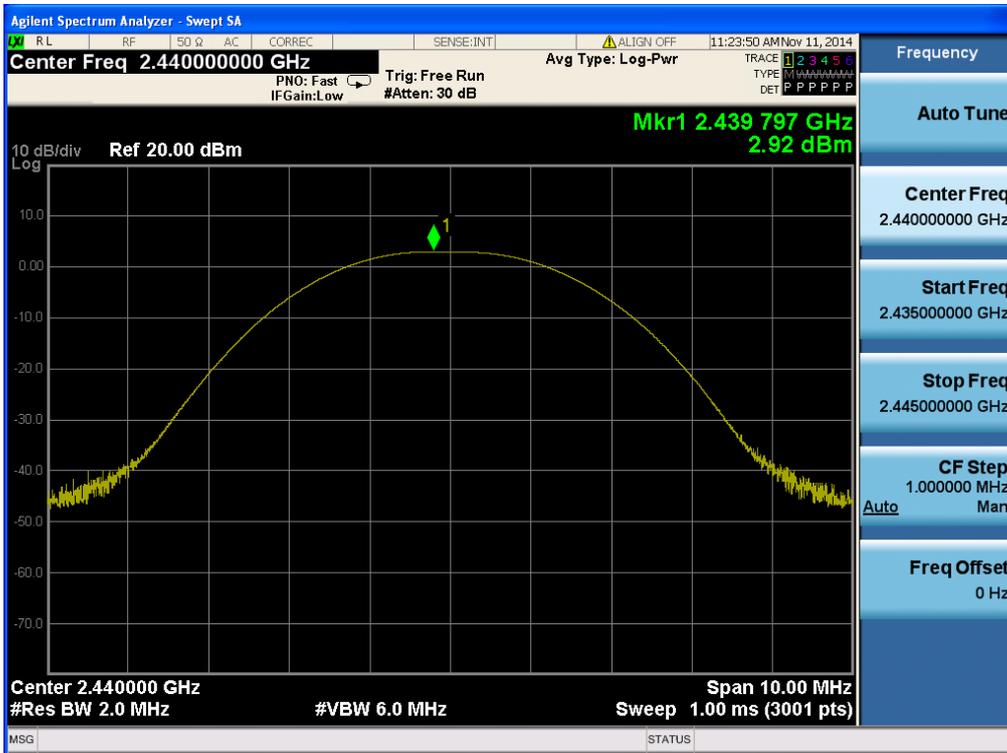

### Peak Output Power

Test Frequency: 2480 MHz

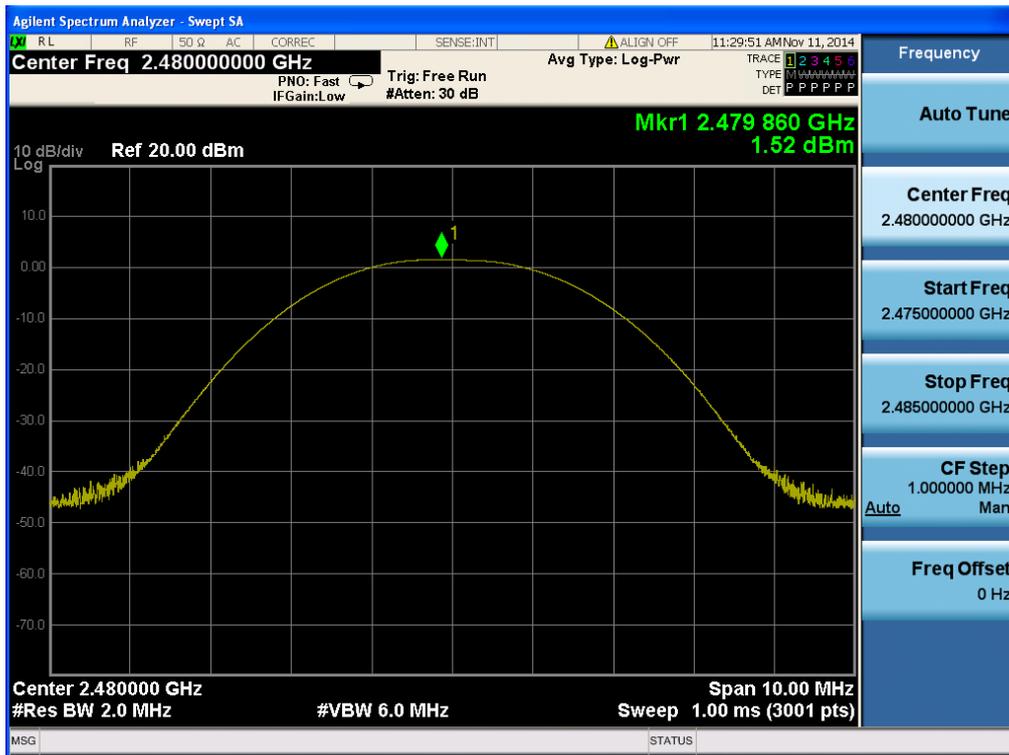

### 8.3 Maximum Power Spectral Density.

#### Test requirements and limit, §15.247(e) & RSS-210[A8.2]

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

**Minimum Standard –specifies a conducted power spectral density (PSD) limit of 8 dBm in any 3 kHz Band segment within the fundamental EBW during any time interval of continuous transmission.**

#### ■ TEST CONFIGURATION

Refer to the APPENDIX I.

#### ■ TEST PROCEDURE:

**Method PKPSD of KDB558074 v03r02** is used.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to **1.5 times** the DTS bandwidth.
3. Set the RBW to: **3 kHz ≤ RBW ≤ 100 kHz**.
4. Set the VBW ≥ **3 x RBW**.
5. Detector = **peak**.
6. Sweep time = **auto couple**.
7. Trace mode = **max hold**.
8. Allow trace to fully stabilize.
9. Use the **peak marker function** to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


#### ■ TEST RESULTS: **Comply**

| Test Mode | Frequency [MHz] | PKPSD [dBm]   |
|-----------|-----------------|---------------|
| LE        | 2402            | -14.25        |
|           | 2440            | <b>-12.20</b> |
|           | 2480            | -13.61        |

RESULT PLOTS


Maximum PKPSD

Test Frequency: 2402 MHz

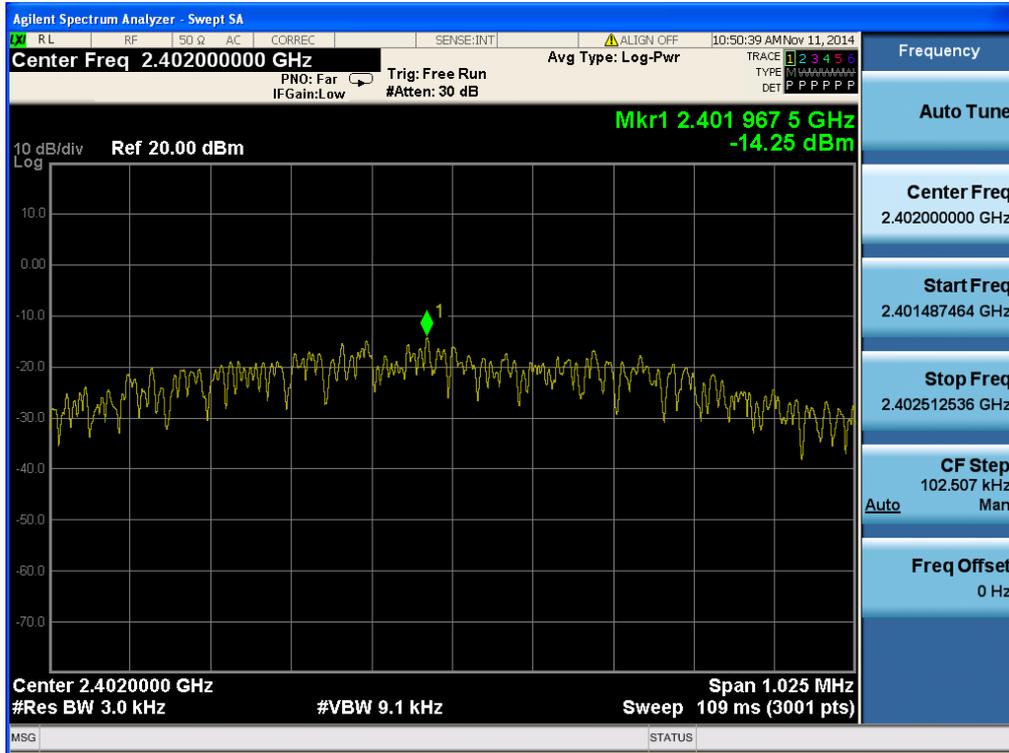


Maximum PKPSD

Test Frequency: 2440 MHz

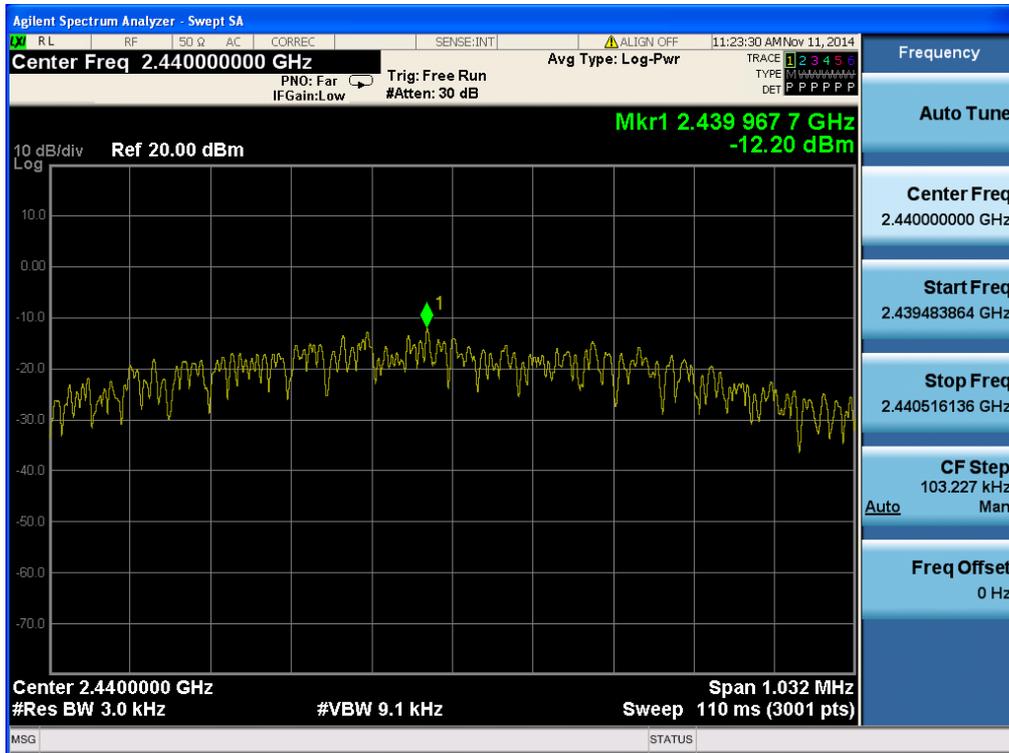

Maximum PKPSD

Test Frequency: 2480 MHz

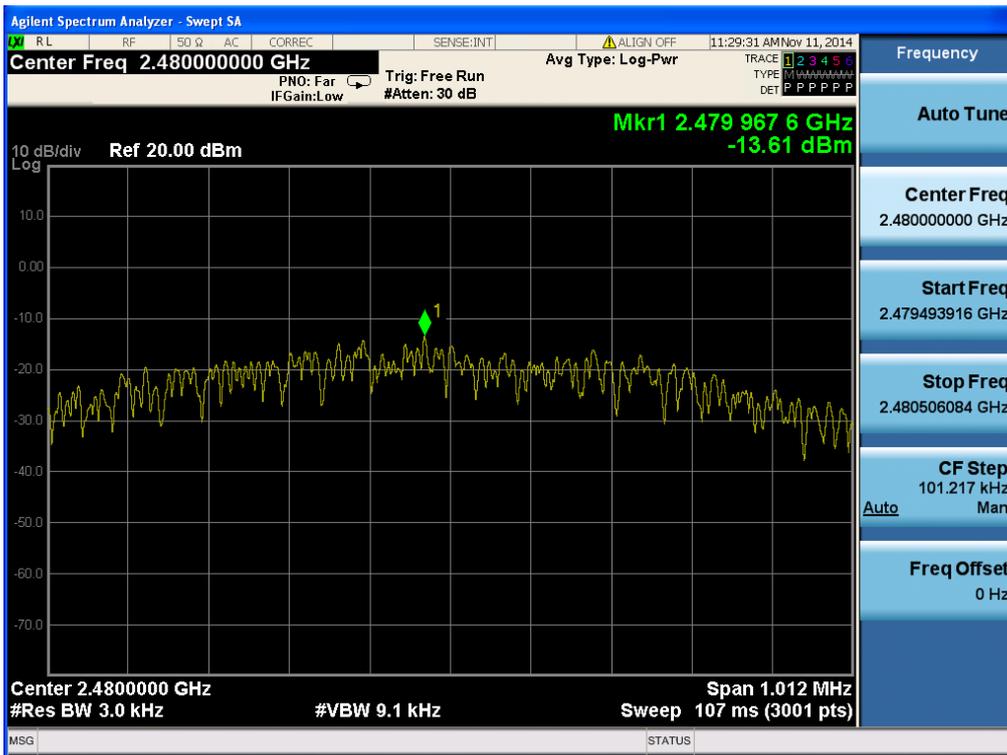

## 8.4 Out of Band Emissions at the Band Edge/ Conducted Spurious Emissions

### Test requirements and limit, §15.247(d) & RSS-210[A8.5]

§15.247(d) specifies that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

If **the peak output power procedure** is used to measure the fundamental emission power to demonstrate compliance to **15.247(b)(3)** requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated **by at least 20dB** relative to the maximum measured in-band peak PSD level.

If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to **15.247(b)(3)** requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured inband average PSD level.

In either case, attenuation to levels below the general emission limits specified in **§15.209(a)** is not required.

### ■ TEST CONFIGURATION

Refer to the APPENDIX I.

### ■ TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer.

#### - Measurement Procedure 1 – Reference Level

1. Set instrument center frequency to DTS channel center frequency.
2. Set the span to  $\geq 1.5$  times the DTS bandwidth.
3. Set the RBW = 100 kHz.
4. Set the VBW  $\geq 3 \times$  RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum PSD level

#### - Measurement Procedure 2 - Unwanted Emissions

1. Set the center frequency and span to encompass frequency range to be measured.
2. Set the RBW = **100 kHz.( Actual 1 MHz , See below note)**
3. Set the VBW  $\geq 3 \times$  RBW.(Actual 3 MHz, See below note)
4. Detector = **peak**.
5. Ensure that the number of measurement points  $\geq$  span/RBW
6. Sweep time = **auto couple**.
7. Trace mode = **max hold**.
8. **Allow the trace to stabilize** (this may take some time, depending on the extent of the span).
9. Use the peak marker function to determine the maximum amplitude level.

**Note:** The conducted spurious emission was tested with below settings.

**Frequency range: 9 KHz ~ 30 MHz**

**RBW= 100kHz, VBW= 300 kHz, SWEEP TIME = AUTO, DETECTOR = PEAK, TRACE = MAX HOLD, SWEEP POINT: 40001**

**Frequency range: 30 MHz ~ 10 GHz, 10 GHz~25 GHz**

**RBW= 1MHz, VBW= 3MHz, SWEEP TIME = AUTO, DETECTOR = PEAK, TRACE = MAX HOLD, SWEEP POINT: 40001**

**LIMIT LINE = 20 dB below of the reference level of above measurement procedure Step 2. (RBW = 100 KHz, VBW = 300 KHz)**

If the emission level with above setting was close to the limit (ie, less than 3 dB margin) then zoom scan is required using RBW = 100 KHz, VBW = 300KHz, SAPN = 100 MHz and BINS = 2001 to get accurate emission level within 100 KHz BW.


Also the path loss for conducted measurement setup was used as described on the Appendix I of this test report.

TEST RESULTS: **Comply**


RESULT PLOTS

LE & 2402 MHz



Reference

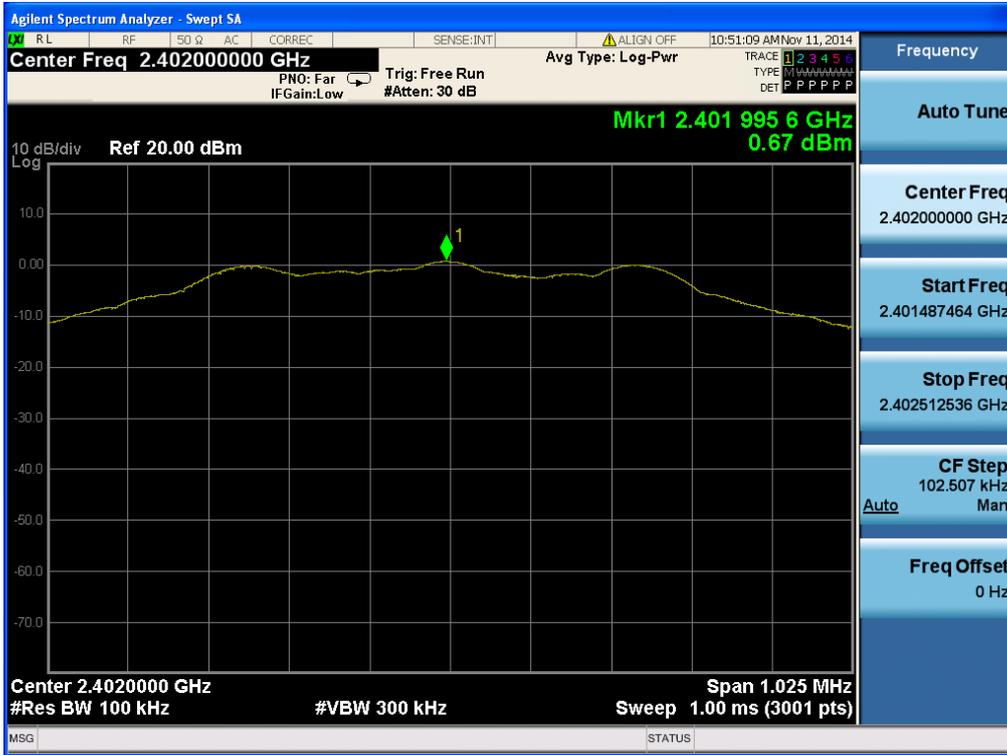


Low Band-edge

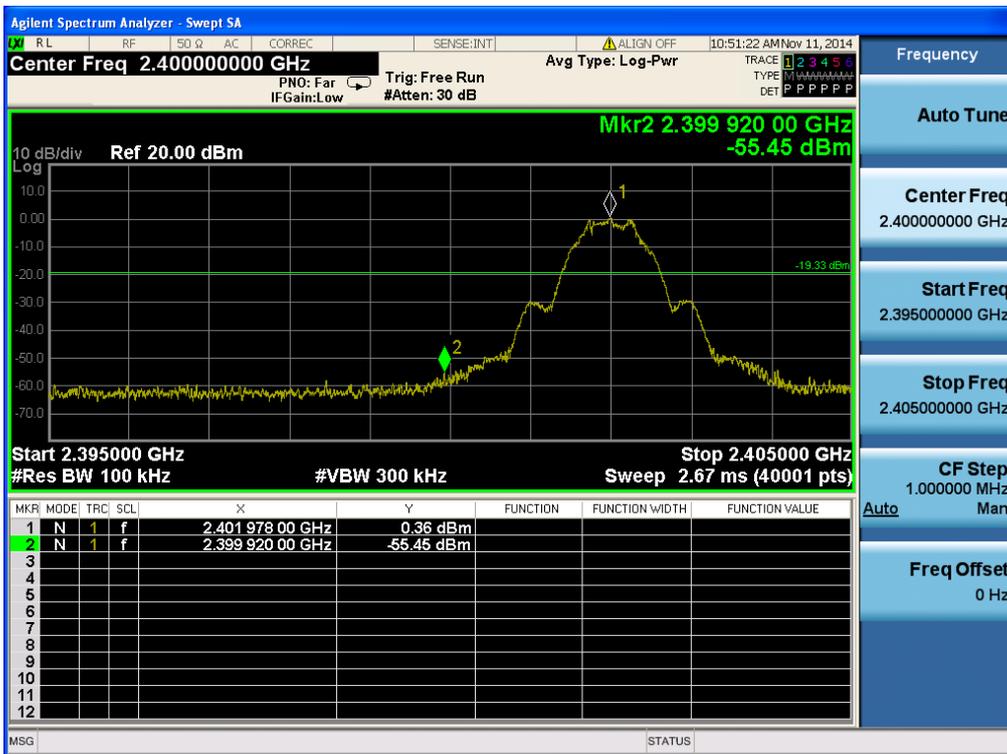

### Conducted Spurious Emissions

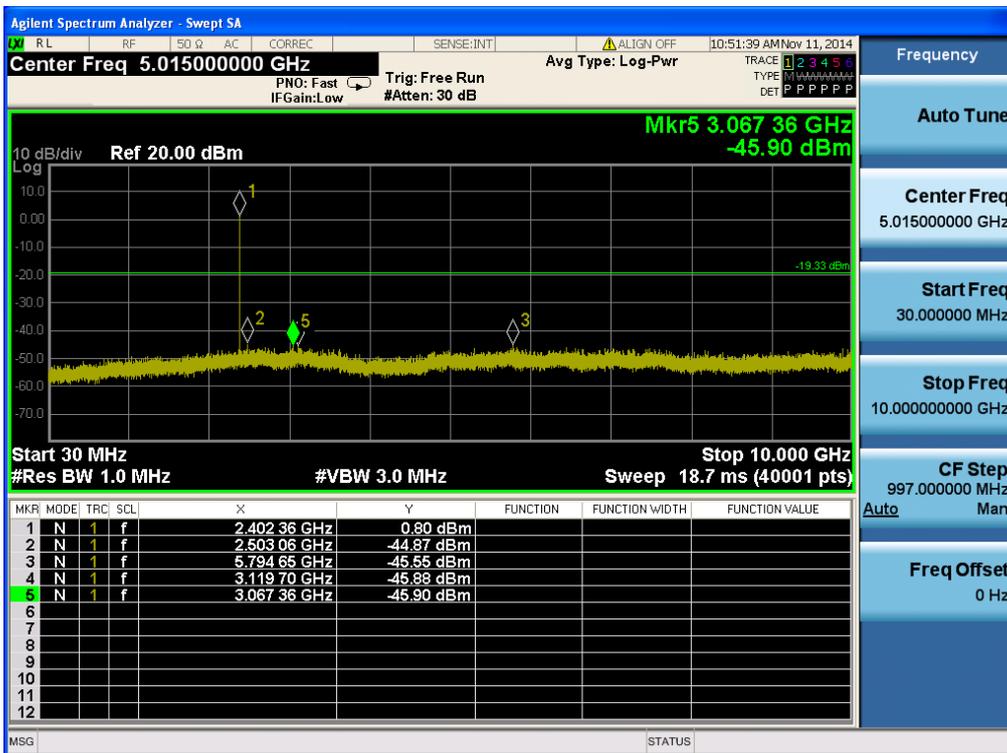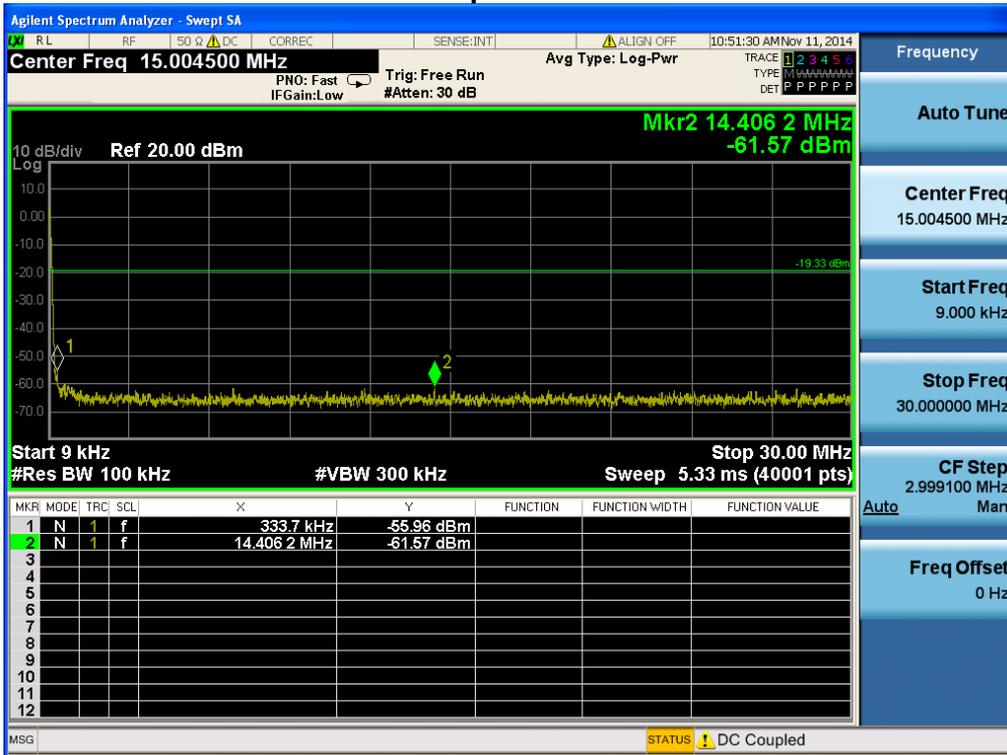

### Conducted Spurious Emissions

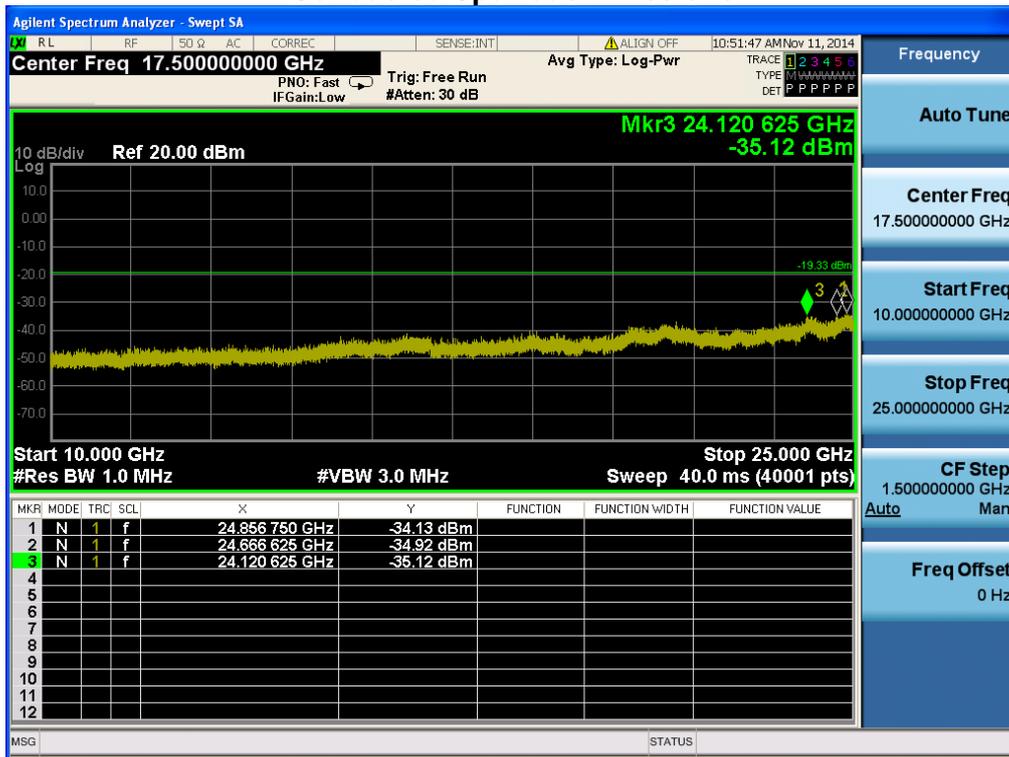


LE & 2440 MHz



Reference



Conducted Spurious Emissions

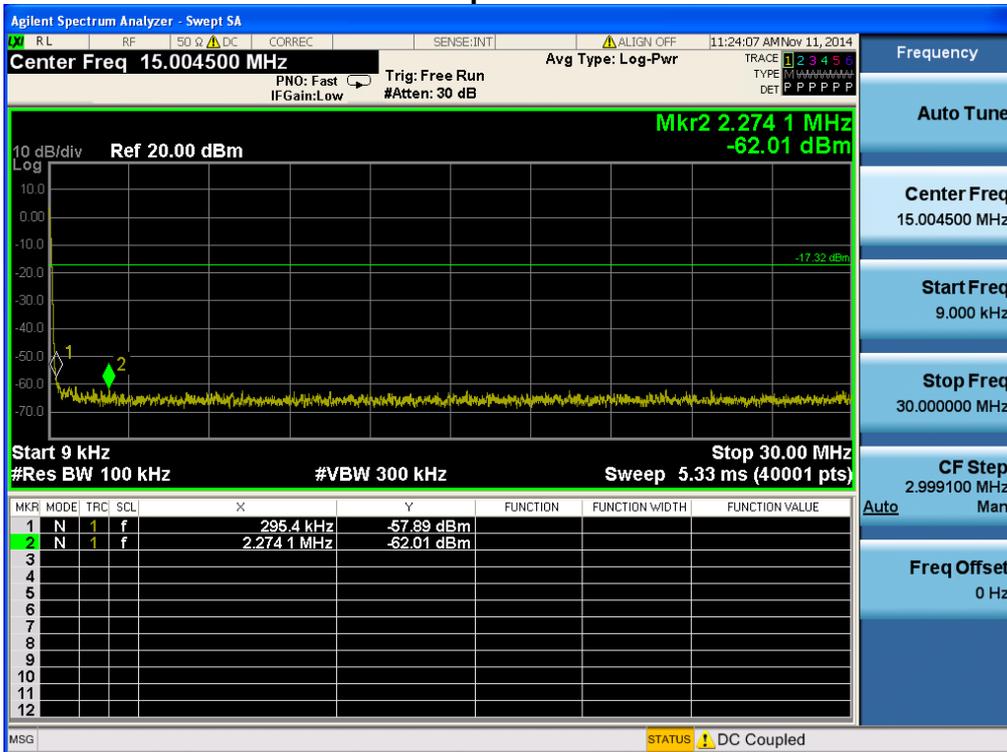

### Conducted Spurious Emissions

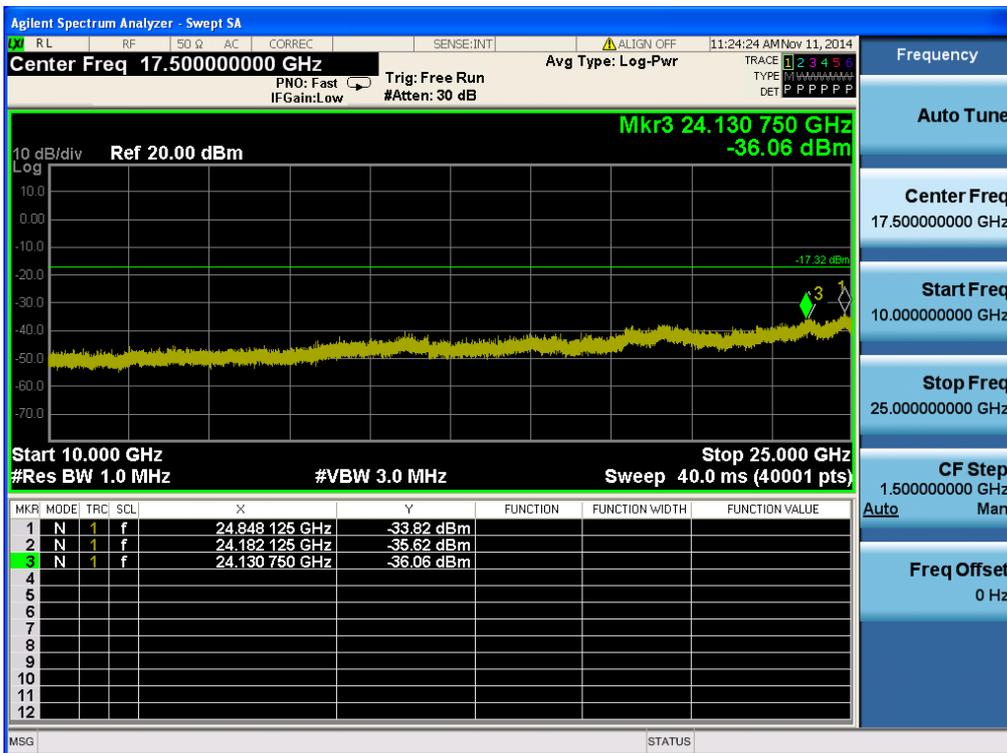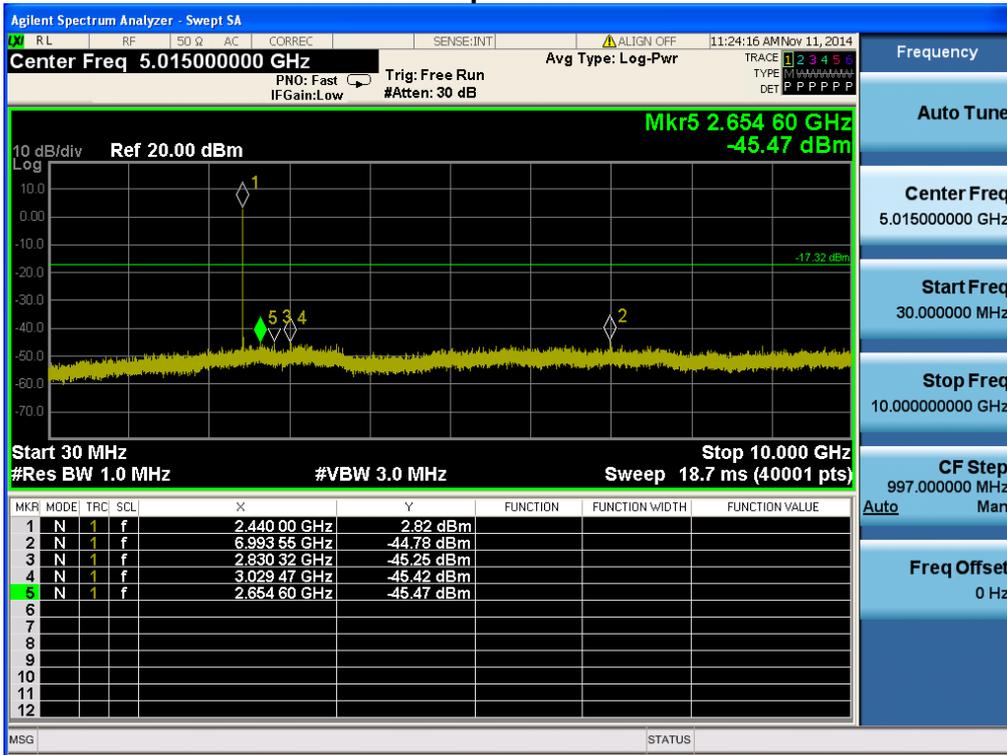


LE & 2480 MHz



Reference




High Band-edge

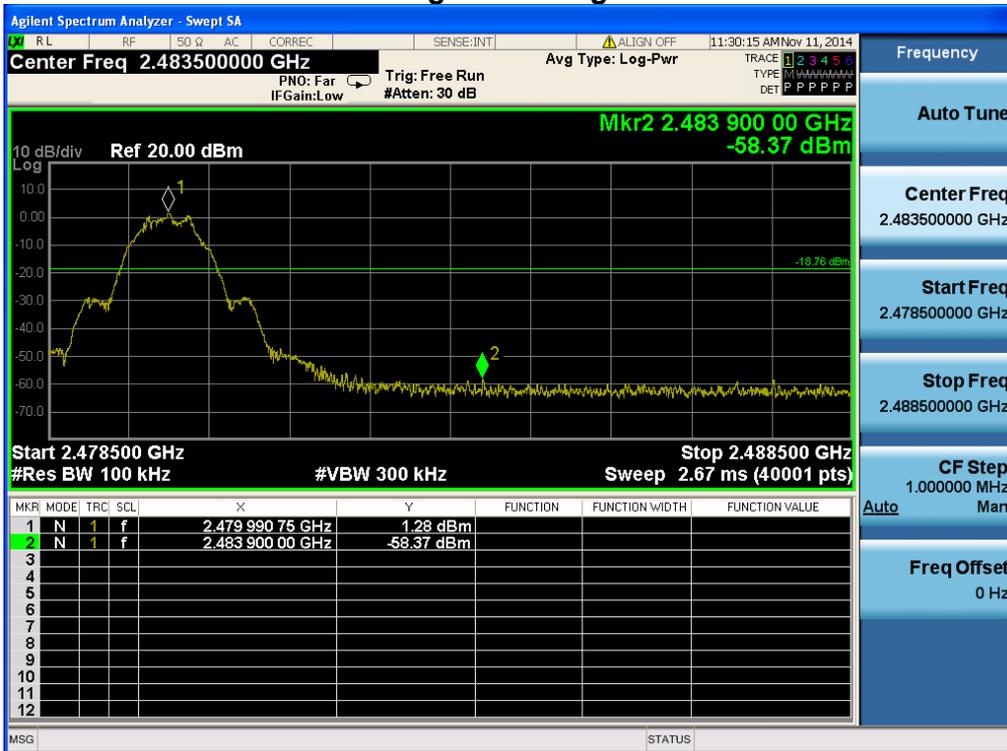

### Conducted Spurious Emissions

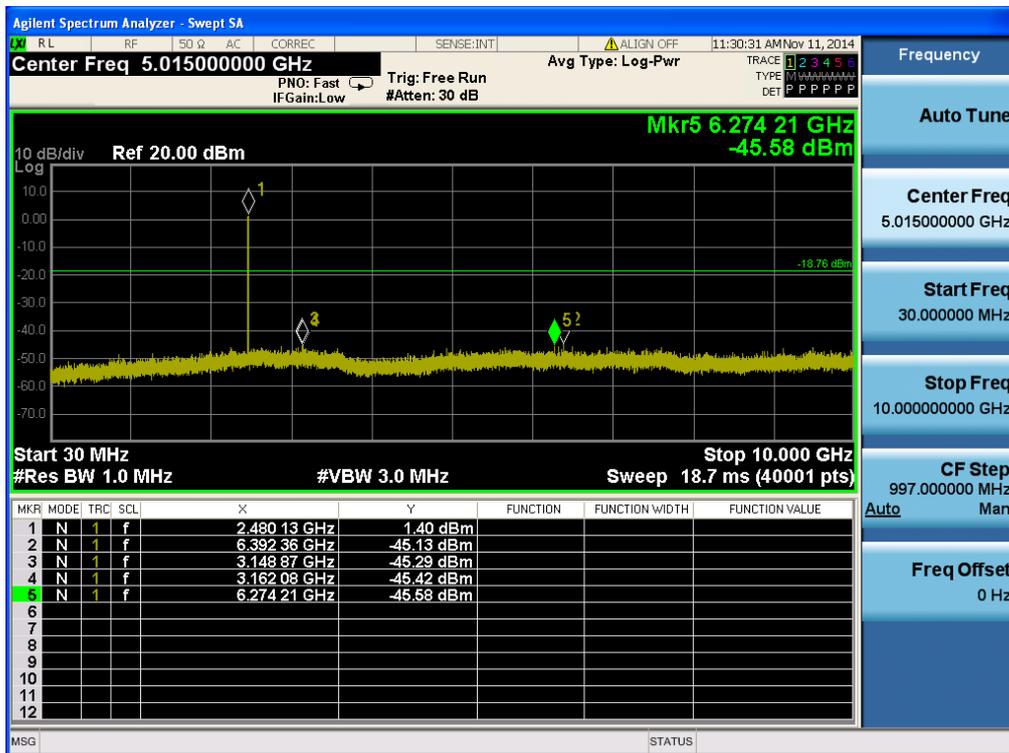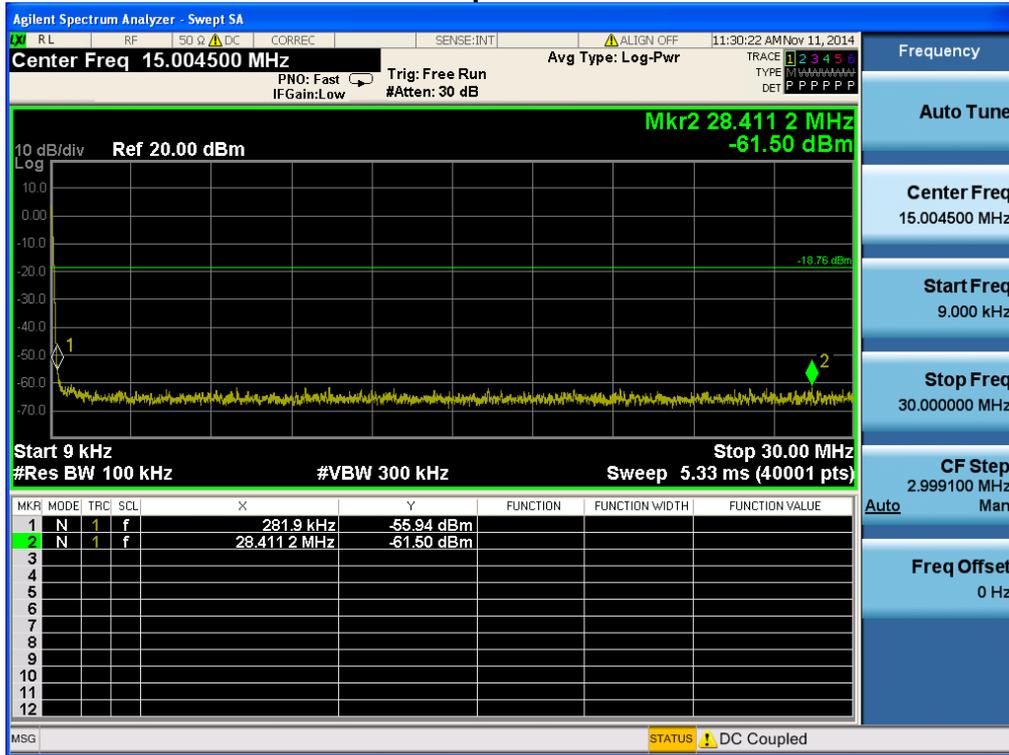

### Conducted Spurious Emissions

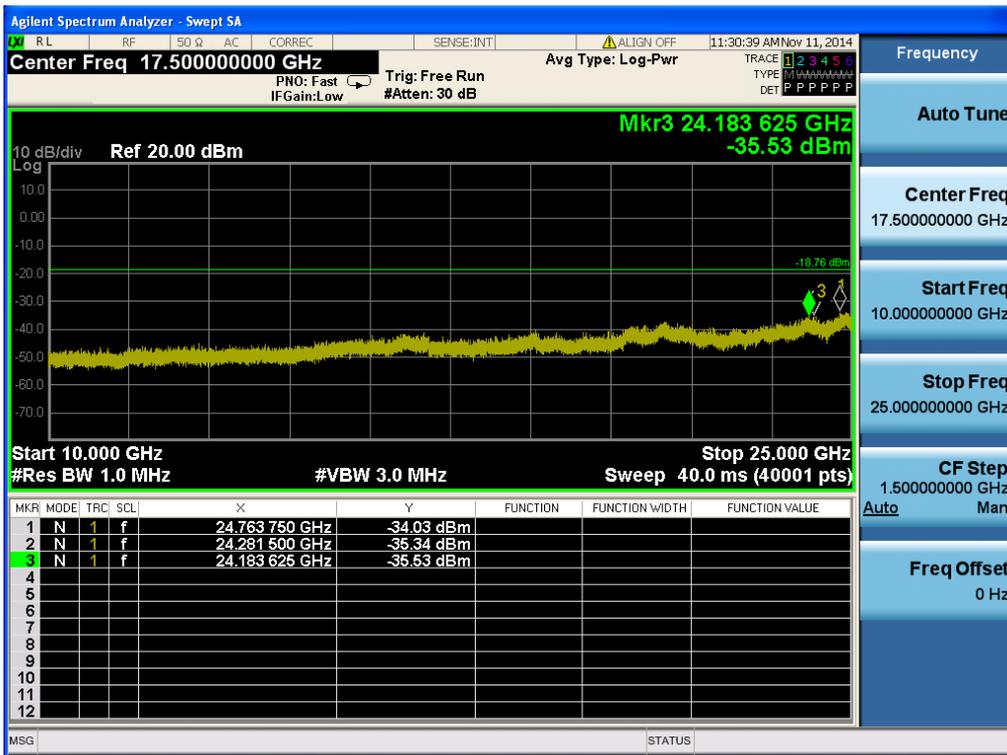

## 8.5 Radiated Measurement.

### 8.5.1 Radiated Spurious Emissions.

#### Test Requirements and limit, §15.205, 15.209, 15.247(d) & RSS-210[A8.5]

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a) and (b), then the 15.209(a) limit in the table below has to be followed

#### ▪ FCC Part 15.209(a) and (b)

| Frequency (MHz) | Limit (uV/m) | Measurement Distance (meter) |
|-----------------|--------------|------------------------------|
| 0.009 – 0.490   | 2400/F(KHz)  | 300                          |
| 0.490 – 1.705   | 24000/F(KHz) | 30                           |
| 1.705 – 30.0    | 30           | 30                           |
| 30 ~ 88         | 100 **       | 3                            |
| 88 ~ 216        | 150 **       | 3                            |
| 216 ~ 960       | 200 **       | 3                            |
| Above 960       | 500          | 3                            |


\*\* Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

#### ▪ FCC Part 15.205 (a): Only spurious emissions are permitted in any of the frequency bands listed below:

| MHz               | MHz               | MHz               | MHz             | GHz          | GHz           |
|-------------------|-------------------|-------------------|-----------------|--------------|---------------|
| 0.009 ~ 0.110     | 8.41425 ~ 8.41475 | 108 ~ 121.94      | 1300 ~ 1427     | 4.5 ~ 5.15   | 14.47 ~ 14.5  |
| 0.495 ~ 0.505     | 12.29 ~ 12.293    | 123 ~ 138         | 1435 ~ 1626.5   | 5.35 ~ 5.46  | 15.35 ~ 16.2  |
| 2.1735 ~ 2.1905   | 12.51975 ~        | 149.9 ~ 150.05    | 1645.5 ~ 1646.5 | 7.25 ~ 7.75  | 17.7 ~ 21.4   |
| 4.125 ~ 4.128     | 12.52025          | 156.52475 ~       | 1660 ~ 1710     | 8.025 ~ 8.5  | 22.01 ~ 23.12 |
| 4.17725 ~ 4.17775 | 12.57675 ~        | 156.52525         | 1718.8 ~ 1722.2 | 9.0 ~ 9.2    | 23.6 ~ 24.0   |
| 4.20725 ~ 4.20775 | 12.57725          | 156.7 ~ 156.9     | 2200 ~ 2300     | 9.3 ~ 9.5    | 31.2 ~ 31.8   |
| 6.215 ~ 6.218     | 13.36 ~ 13.41     | 162.0125 ~ 167.17 | 2310 ~ 2390     | 10.6 ~ 12.7  | 36.43 ~ 36.5  |
| 6.26775 ~ 6.26825 | 16.42 ~ 16.423    | 167.72 ~ 173.2    | 2483.5 ~ 2500   | 13.25 ~ 13.4 | Above 38.6    |
| 6.31175 ~ 6.31225 | 16.69475 ~        | 240 ~ 285         | 2655 ~ 2900     |              |               |
| 8.291 ~ 8.294     | 16.69525          | 322 ~ 335.4       | 3260 ~ 3267     |              |               |
| 8.362 ~ 8.366     | 16.80425 ~        | 399.90 ~ 410      | 3332 ~ 3339     |              |               |
| 8.37625 ~ 8.38675 | 16.80475          | 608 ~ 614         | 3345.8 ~ 3358   |              |               |
|                   | 25.5 ~ 25.67      | 960 ~ 1240        | 3600 ~ 4400     |              |               |
|                   | 37.5 ~ 38.25      |                   |                 |              |               |
|                   | 73 ~ 74.6         |                   |                 |              |               |
|                   | 74.8 ~ 75.2       |                   |                 |              |               |

▪ **FCC Part 15.205(b):** The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

**Test Configuration**

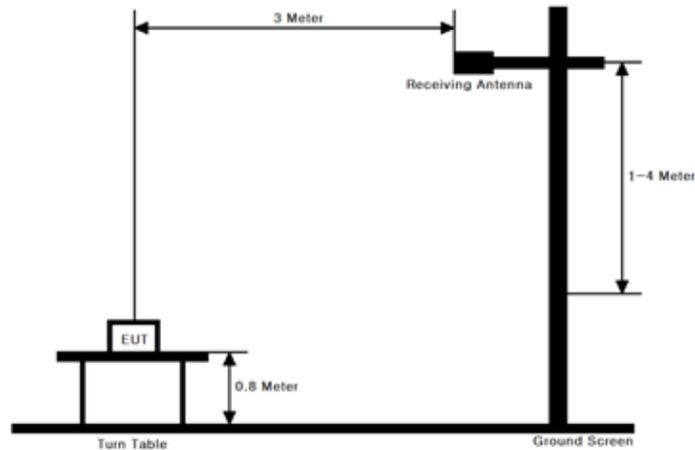

**TEST PROCEDURE**

1. The EUT is placed on a non-conductive table, which is 0.8 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

**Note: Measurement Instrument Setting for Radiated Emission Measurements.**

**1. Frequency Range Below 1 GHz**

RBW = 100 or 120 KHz, VBW = 3 x RBW , Detector = Peak or Quasi Peak

**2. Frequency Range > 1 GHz**

**Peak Measurement > 1 GHz**

RBW = 1MHz , VBW = 3 MHz, Detector = Peak, Sweep time = Auto, Trace mode = Max Hold until the trace stabilizes

**Average Measurement > 1GHz**

RBW = 1MHz, VBW ≥ 1/T, Detector = Peak, Sweep Time = Auto, Trace Mode = Max Hold for at least 50 \* (1/Duty cycle) traces

| Test Mode | Duty Cycle (%) | T <sub>on</sub> (us) | 1/T <sub>on</sub> (kHz) | Determined VBW Setting |
|-----------|----------------|----------------------|-------------------------|------------------------|
| BT(LE)    | 62.30          | 390                  | 2.56                    | 3kHz                   |

Note: Refer to appendix II for duty cycle measurement procedure and plots

**9 KHz ~ 25GHz Data**

## ▪ Lowest Channel

| Frequency (MHz) | ANT Pol | EUT Position (Axis) | Detector Mode | Reading (dBuV) | T.F (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------|---------------------|---------------|----------------|------------|-----------------|----------------|-------------|
| 2385.32         | H       | X                   | PK            | 46.78          | 2.51       | 49.29           | 74.00          | 24.71       |
| 2385.81         | H       | X                   | AV            | 35.90          | 2.51       | 38.41           | 54.00          | 15.59       |
| 4803.78         | H       | X                   | PK            | 44.10          | 8.70       | 52.80           | 74.00          | 21.20       |
| 4804.40         | H       | X                   | AV            | 33.77          | 8.70       | 42.47           | 54.00          | 11.53       |

## ▪ Middle Channel (Without Wireless charging)

| Frequency (MHz) | ANT Pol | EUT Position (Axis) | Detector Mode | Reading (dBuV) | T.F (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------|---------------------|---------------|----------------|------------|-----------------|----------------|-------------|
| 4880.52         | H       | X                   | PK            | 43.47          | 8.71       | 52.18           | 74.00          | 21.82       |
| 4879.71         | H       | X                   | AV            | 33.89          | 8.71       | 42.60           | 54.00          | 11.40       |

## ▪ Middle Channel (With Wireless charging)

| Frequency (MHz) | ANT Pol | EUT Position (Axis) | Detector Mode | Reading (dBuV) | T.F (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------|---------------------|---------------|----------------|------------|-----------------|----------------|-------------|
| 4880.45         | H       | X                   | PK            | 43.51          | 8.71       | 52.22           | 74.00          | 21.78       |
| 4879.97         | H       | X                   | AV            | 33.91          | 8.71       | 42.62           | 54.00          | 11.38       |

## ▪ Highest Channel

| Frequency (MHz) | ANT Pol | EUT Position (Axis) | Detector Mode | Reading (dBuV) | T.F (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------|---------------------|---------------|----------------|------------|-----------------|----------------|-------------|
| 2485.36         | H       | X                   | PK            | 45.65          | 3.10       | 48.75           | 74.00          | 25.25       |
| 2483.55         | H       | X                   | AV            | 35.29          | 3.10       | 38.39           | 54.00          | 15.61       |
| 4959.33         | H       | Z                   | PK            | 43.56          | 8.73       | 52.29           | 74.00          | 21.71       |
| 4959.85         | H       | Z                   | AV            | 33.51          | 8.73       | 42.24           | 54.00          | 11.76       |

**Note.**

1. No other spurious and harmonic emissions were reported greater than listed emissions above table.
2. Above listed point data is the worst case data.
3. Sample Calculation.

$$\text{Margin} = \text{Limit} - \text{Result} \quad / \quad \text{Result} = \text{Reading} + \text{T.F} / \quad \text{T.F} = \text{AF} + \text{CL} - \text{AG}$$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

## 8.6 POWERLINE CONDUCTED EMISSIONS

### Test Requirements and limit, §15.207 & RSS-Gen[7.2.4]

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

| Frequency Range (MHz) | Conducted Limit (dBuV) |            |
|-----------------------|------------------------|------------|
|                       | Quasi-Peak             | Average    |
| 0.15 ~ 0.5            | 66 to 56 *             | 56 to 46 * |
| 0.5 ~ 5               | 56                     | 46         |
| 5 ~ 30                | 60                     | 50         |

\* Decreases with the logarithm of the frequency

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### Test Configuration

See test photographs for the actual connections between EUT and support equipment.

### TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.

RESULT PLOTS

AC Line Conducted Emissions (Graph)

Test Mode: LE & 2440MHz

Results of Conducted Emission



Date : 2014-11-10

Model No. : LG-D855v  
Type :  
Serial No. :  
Test Condition : BT LE/2440

Reference No. :  
Power Supply : 120 V 60 Hz  
Temp/Humi. : 24 'C 50 % R.H.  
Operator : H.P LEE

Memo : FINAL

LIMIT : FCC P15.207 QP  
FCC P15.207 AV

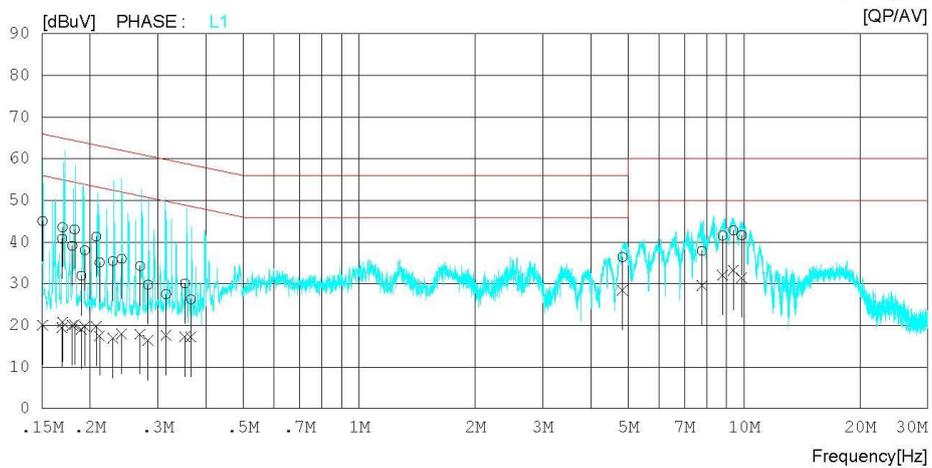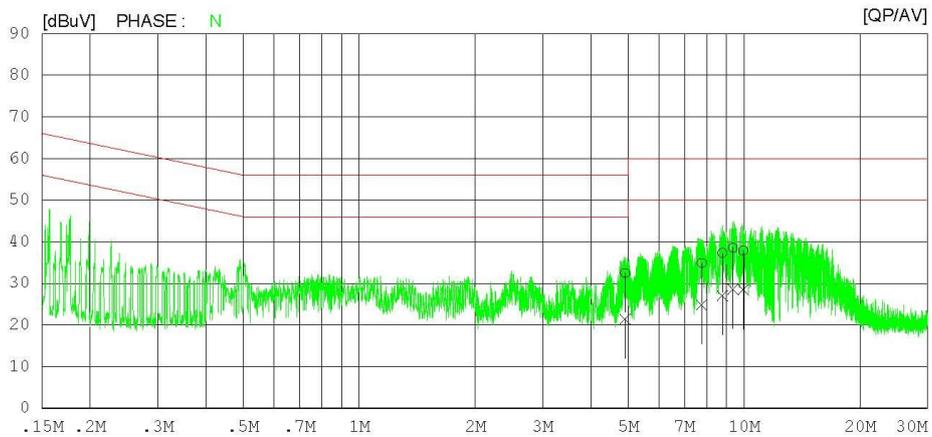

**AC Line Conducted Emissions (List)**

Test Mode: LE &amp; 2440MHz

**Results of Conducted Emission**

Date : 2014-11-10

|                |              |               |                   |
|----------------|--------------|---------------|-------------------|
| Model No.      | : LG-D855v   | Reference No. | :                 |
| Type           | :            | Power Supply  | : 120 V 60 Hz     |
| Serial No.     | :            | Temp/Humi.    | : 24 'C 50 % R.H. |
| Test Condition | : BT LE/2440 | Operator      | : H.P LEE         |

Memo : FINAL

LIMIT : FCC P15.207 QP  
FCC P15.207 AV

| NO | FREQ<br>[MHz] | READING      |              | C. FACTOR<br>[dB] | RESULT       |              | LIMIT        |              | MARGIN       |              | PHASE |
|----|---------------|--------------|--------------|-------------------|--------------|--------------|--------------|--------------|--------------|--------------|-------|
|    |               | QP<br>[dBuV] | AV<br>[dBuV] |                   | QP<br>[dBuV] | AV<br>[dBuV] | QP<br>[dBuV] | AV<br>[dBuV] | QP<br>[dBuV] | AV<br>[dBuV] |       |
| 1  | 4.90800       | 22.4         | 11.3         | 10.1              | 32.5         | 21.4         | 56.0         | 46.0         | 23.5         | 24.6         | N     |
| 2  | 7.76120       | 24.7         | 14.6         | 10.2              | 34.9         | 24.8         | 60.0         | 50.0         | 25.1         | 25.2         | N     |
| 3  | 8.78280       | 27.1         | 16.9         | 10.2              | 37.3         | 27.1         | 60.0         | 50.0         | 22.7         | 22.9         | N     |
| 4  | 9.35520       | 28.4         | 18.4         | 10.2              | 38.6         | 28.6         | 60.0         | 50.0         | 21.4         | 21.4         | N     |
| 5  | 9.95920       | 27.7         | 18.3         | 10.2              | 37.9         | 28.5         | 60.0         | 50.0         | 22.1         | 21.5         | N     |
| 6  | 0.15037       | 35.1         | 10.2         | 9.9               | 45.0         | 20.1         | 66.0         | 56.0         | 21.0         | 35.9         | L1    |
| 7  | 0.16948       | 33.7         | 10.8         | 9.9               | 43.6         | 20.7         | 65.0         | 55.0         | 21.4         | 34.3         | L1    |
| 8  | 0.16902       | 30.9         | 9.6          | 9.9               | 40.8         | 19.5         | 65.0         | 55.0         | 24.2         | 35.5         | L1    |
| 9  | 0.17967       | 29.2         | 10.1         | 9.9               | 39.1         | 20.0         | 64.5         | 54.5         | 25.4         | 34.5         | L1    |
| 10 | 0.18212       | 33.1         | 10.2         | 9.9               | 43.0         | 20.1         | 64.4         | 54.4         | 21.4         | 34.3         | L1    |
| 11 | 0.18955       | 22.0         | 9.1          | 9.9               | 31.9         | 19.0         | 64.1         | 54.1         | 32.2         | 35.1         | L1    |
| 12 | 0.19362       | 28.1         | 9.8          | 9.9               | 38.0         | 19.7         | 63.9         | 53.9         | 25.9         | 34.2         | L1    |
| 13 | 0.20761       | 31.4         | 9.8          | 9.9               | 41.3         | 19.7         | 63.3         | 53.3         | 22.0         | 33.6         | L1    |
| 14 | 0.21157       | 25.2         | 7.5          | 9.9               | 35.1         | 17.4         | 63.1         | 53.1         | 28.0         | 35.7         | L1    |
| 15 | 0.22919       | 25.5         | 7.0          | 9.9               | 35.4         | 16.9         | 62.5         | 52.5         | 27.1         | 35.6         | L1    |
| 16 | 0.24147       | 26.1         | 8.0          | 9.9               | 36.0         | 17.9         | 62.0         | 52.0         | 26.0         | 34.1         | L1    |
| 17 | 0.26979       | 24.3         | 8.0          | 9.9               | 34.2         | 17.9         | 61.1         | 51.1         | 26.9         | 33.2         | L1    |
| 18 | 0.28271       | 19.9         | 6.5          | 9.9               | 29.8         | 16.4         | 60.7         | 50.7         | 30.9         | 34.3         | L1    |
| 19 | 0.31510       | 17.6         | 7.7          | 9.9               | 27.5         | 17.6         | 59.8         | 49.8         | 32.3         | 32.2         | L1    |
| 20 | 0.35250       | 20.2         | 7.4          | 9.9               | 30.1         | 17.3         | 58.9         | 48.9         | 28.8         | 31.6         | L1    |
| 21 | 0.36543       | 16.3         | 7.3          | 9.9               | 26.2         | 17.2         | 58.6         | 48.6         | 32.4         | 31.4         | L1    |
| 22 | 4.83120       | 26.3         | 18.3         | 10.1              | 36.4         | 28.4         | 56.0         | 46.0         | 19.6         | 17.6         | L1    |
| 23 | 7.77520       | 27.7         | 19.3         | 10.2              | 37.9         | 29.5         | 60.0         | 50.0         | 22.1         | 20.5         | L1    |
| 24 | 8.79700       | 31.3         | 21.8         | 10.2              | 41.5         | 32.0         | 60.0         | 50.0         | 18.5         | 18.0         | L1    |
| 25 | 9.37920       | 32.6         | 23.0         | 10.2              | 42.8         | 33.2         | 60.0         | 50.0         | 17.2         | 16.8         | L1    |
| 26 | 9.86080       | 31.5         | 21.3         | 10.2              | 41.7         | 31.5         | 60.0         | 50.0         | 18.3         | 18.5         | L1    |

## 8.7 Occupied Bandwidth

### Test Requirements, RSS-Gen [4.6.1]

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.

#### ■ TEST CONFIGURATION


##### ■ TEST PROCEDURE

The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual.

##### ■ TEST RESULTS: **NA**

**9. LIST OF TEST EQUIPMENT**

| Type                          | Manufacturer | Model     | Cal.Date<br>(yy/mm/dd) | Next.Cal.Date<br>(yy/mm/dd) | S/N           |
|-------------------------------|--------------|-----------|------------------------|-----------------------------|---------------|
| MXA Signal Analyzer           | Agilent      | N9020A    | 14/03/28               | 15/03/28                    | MY50510026    |
| Digital Multimeter            | H.P          | 34401A    | 14/02/27               | 15/02/27                    | 3146A13475    |
| Dynamic Measurement DC Source | Agilent      | 66332A    | 14/09/11               | 15/09/11                    | US37473627    |
| Thermohygrometer              | BODYCOM      | BJ5478    | 14/03/03               | 15/03/03                    | 1209          |
| Vector Signal Generator       | R&S          | SMJ100A   | 14/01/07               | 15/01/07                    | 100148        |
| Signal Generator              | R&S          | SMF100A   | 14/07/01               | 15/07/01                    | 102341        |
| 2W 3dB Attenuator             | SMAJK        | SMAJK-2-3 | 14/10/21               | 15/10/21                    | 3             |
| High-pass filter              | Wainwright   | WHKX3.0   | 14/09/11               | 15/09/11                    | 9             |
| LOOP Antenna                  | Schwarzbeck  | FMZB1513  | 14/04/29               | 16/04/29                    | 1513-128      |
| BILOG ANTENNA                 | Schwarzbeck  | VULB 9160 | 14/04/04               | 16/04/04                    | 3357          |
| Horn Antenna                  | ETS-LINDGREN | 3117      | 14/05/12               | 16/05/12                    | 00140394      |
| Horn Antenna                  | A.H.Systems  | SAS-574   | 13/03/20               | 15/03/20                    | 154           |
| Amplifier (22dB)              | H.P          | 8447E     | 14/01/07               | 15/01/07                    | 2945A02865    |
| Amplifier (30dB)              | Agilent      | 8449B     | 14/02/27               | 15/02/27                    | 3008A00370    |
| EMI TEST RECEIVER             | R&S          | ESU       | 14/01/07               | 15/01/07                    | 100014        |
| EMI TEST RECEIVER             | R&S          | ESCI      | 14/02/27               | 15/02/27                    | 100910        |
| CVCF                          | NF           | 4420      | 14/05/26               | 15/05/26                    | 3049354420023 |
| LISN                          | R&S          | ESH2-Z5   | 14/09/11               | 15/09/11                    | 828739/006    |
| PULSE LIMITER                 | R&S          | ESH3-Z2   | 14/01/08               | 15/01/08                    | 101334        |

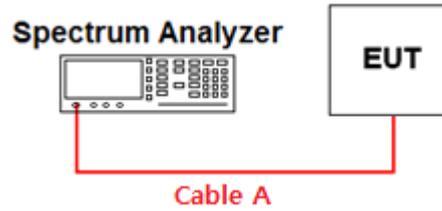**APPENDIX I****Conducted Test set up Diagram & Path loss Information****Conducted Measurement****Path loss information**

| Frequency (GHz)    | Path Loss (dB) | Frequency (GHz) | Path Loss (dB) |
|--------------------|----------------|-----------------|----------------|
| 0.03               | 0.32           | 15              | 5.17           |
| 1                  | 1.45           | 20              | 5.79           |
| 2402 & 2440 & 2480 | 2.1            | 25              | 7.94           |
| 5                  | 2.88           | -               | -              |
| 10                 | 3.95           | -               | -              |

Note. 1: The path loss from EUT to Spectrum analyzer was measured and used for test.

Path loss (=S/A's correction factor)

= Cable A (Attenuator, Applied only when it was used externally)

## APPENDIX II Duty cycle plots

### TEST PROCEDURE

#### Duty Cycle measured using section 6.0 b) of KDB558074 v03r02:

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

Set the center frequency of the instrument to the center frequency of the transmission. Set  $RBW \geq OBW$  if possible; otherwise, set RBW to the largest available value. Set  $VBW \geq RBW$ . Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$  and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if  $T \leq 16.7$  microseconds.)


#### Measurement set-up of RBW

| Test Mode | T     | 50/T      | RBW ( $\leq$ VBW) |
|-----------|-------|-----------|-------------------|
| LE        | 390us | 128.2 kHz | 8 MHz             |
| -         | -     | -         | -                 |

### Test Plots :

#### Duty Cycle

Test Mode: BT LE & 2440MHz

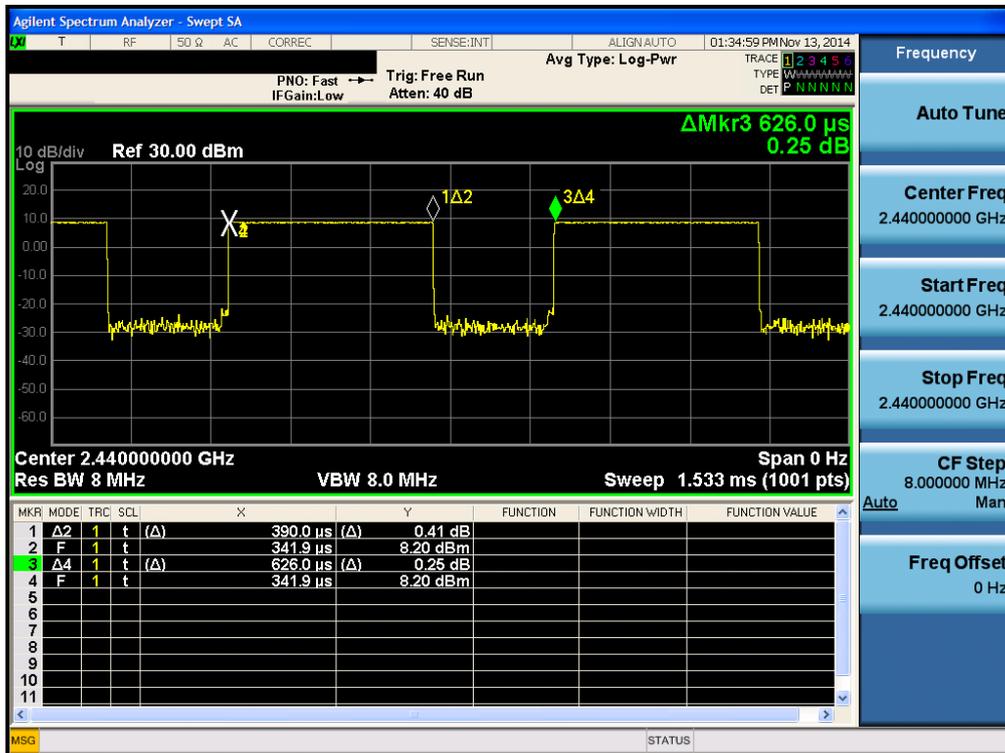

$$\text{Duty Cycle} = T_{\text{on}} / (T_{\text{on}} + T_{\text{off}}) = 390 \text{ us} / 626 \text{ us} = 62.30\%$$