

HCT CO., LTD.

CERTIFICATE OF COMPLIANCE FCC Certification

Applicant Name: LG Electronics MobileComm U.S.A., Inc.	Date of Issue: December 24, 2013
Address: 1000 Sylvan Avenue, Englewood Cliffs NJ 07632	Test Site/Location: HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang- myeon, Icheon-si, Gyeonggi-do, Korea
	Report No.: HCTR1312FR33
	HCT FRN: 0005866421

FCC ID : ZNFD956

APPLICANT : LG Electronics MobileComm U.S.A., Inc.

FCC Model(s):	LG-D956
Additional FCC Model(s):	D956, LGD956, LG-D951, D951, LGD951
EUT Type:	Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID
Max. RF Output Power:	Wi-Fi 802.11b (19.67 dBm) / Wi-Fi 802.11g (23.23 dBm) / Wi-Fi 802.11n (2.4 GHz) (24.06 dBm) / Wi-Fi 802.11ac (2.4 GHz) (22.71 dBm) / Wi-Fi 802.11a (5.8 GHz) (23.17 dBm) / Wi-Fi 802.11n_20 MHz BW (5.8 GHz) (23.06 dBm) / Wi-Fi 802.11n_40 MHz BW (5.8 GHz) (17.18 dBm) / Wi-Fi 802.11ac_20 MHz BW (5.8 GHz) (21.85 dBm) / Wi-Fi 802.11ac_40 MHz BW (5.8 GHz) (16.22 dBm) / Wi-Fi 802.11ac_80 MHz BW (5.8 GHz) (16.26 dBm)
Frequency Range:	2412 MHz - 2462 MHz (2.4 GHz Band) 5745 MHz - 5825 MHz (5.8 GHz Band)_20 MHz BW, 5755 MHz - 5795 MHz (5.8 GHz Band)_40 MHz BW 5775 MHz (5.8 GHz Band)_80 MHz BW
Modulation type	CCK/DSSS/OFDM
FCC Classification:	Digital Transmission System(DTS)
FCC Rule Part(s):	Part 15.247

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)



Report prepared by
: Jong Seok Lee
Test engineer of RF Team



Approved by
: Kyoung Houn Seo
Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNFD956



Version

TEST REPORT NO.	DATE	DESCRIPTION
HCTR1312FR33	December 24, 2013	- First Approval Report

Table of Contents

1. GENERAL INFORMATION	4
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE	5
3.3 GENERAL TEST PROCEDURES	5
3.4 DESCRIPTION OF TEST MODES	5
4. INSTRUMENT CALIBRATION.....	6
5. FACILITIES AND ACCREDITATIONS	6
5.1 FACILITIES	6
5.2 EQUIPMENT	6
6. ANTENNA REQUIREMENTS	6
7. SUMMARY TEST OF RESULTS	7
8. TEST RESULT	8
8.1 DUTY CYCLE(802.11a/b/g/n/ac)	8
8.2 6dB BANDWIDTH (802.11a/b/g/n/ac)	1 1
8.3 OUTPUT POWER (802.11a/b/g/n/ac).....	2 0
8.4 POWER SPECTRAL DENSITY (802.11a/b/g/n/ac).....	4 7
8.5 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS ...	5 5
8.6 RADIATED MEASUREMENT.....	8 8
8.6.1 RADIATED SPURIOUS EMISSIONS.....	8 8
8.6.2 RADIATED RESTRICTED BAND EDGES	1 1 2
8.7 POWERLINE CONDUCTED EMISSIONS	1 1 7
9. LIST OF TEST EQUIPMENT	1 2 2

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNFD956



1. GENERAL INFORMATION

Applicant: LG Electronics MobileComm U.S.A., Inc.
Address: 1000 Sylvan Avenue, Englewood Cliffs NJ 07632
FCC ID: ZNFD956
EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID
Model name(s): LG-D956
Additional Model name(s): D956, LGD956, LG-D951, D951, LGD951
Date(s) of Tests: December 03, 2013 ~ December 12, 2013
Place of Tests: HCT Co., Ltd.
 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea
 (IC Recognition No. : 5944A-3)

2. EUT DESCRIPTION

EUT Type	Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	
FCC Model Name	LG-D956	
Additional FCC Model Name	D956, LGD956, LG-D951, D951, LGD951	
Power Supply	DC 3.8 V	
Battery type	Li-ion Battery(Standard)	
Frequency Range	TX	2412 MHz~2462 MHz, 5745 MHz~5825 MHz_20 MHz, 5755 MHz~5795 MHz_40 MHz 5775 MHz_80 MHz
	RX	2412 MHz~2462 MHz, 5745 MHz~5825 MHz_20 MHz, 5755 MHz~5795 MHz_40 MHz 5775 MHz_80 MHz
Max. RF Output Power	Peak	Wi-Fi 802.11b (19.67 dBm) / Wi-Fi 802.11g (23.23 dBm)/ Wi-Fi 802.11n (2.4 GHz) (24.06 dBm) / Wi-Fi 802.11ac (2.4 GHz) (22.71 dBm) / Wi-Fi 802.11a (5.8 GHz) (23.17 dBm)/ Wi-Fi 802.11n_20 MHz BW (5.8 GHz) (23.06 dBm) / Wi-Fi 802.11n_40 MHz BW (5.8 GHz) (17.18 dBm) / Wi-Fi 802.11ac_20 MHz BW (5.8 GHz) (21.85 dBm) / Wi-Fi 802.11ac_40 MHz BW (5.8 GHz) (16.22 dBm) / Wi-Fi 802.11ac_80 MHz BW (5.8 GHz) (16.26 dBm)
	Average	Wi-Fi 802.11b (16.02 dBm) / Wi-Fi 802.11g (12.48 dBm)/ Wi-Fi 802.11n (2.4 GHz) (12.49 dBm) / Wi-Fi 802.11ac (2.4 GHz) (11.55 dBm) / Wi-Fi 802.11a (5.8 GHz) (11.50 dBm)/ Wi-Fi 802.11n_20 MHz BW (5.8 GHz) (10.67 dBm) / Wi-Fi 802.11n_40 MHz BW (5.8 GHz) (9.78 dBm) / Wi-Fi 802.11ac_20 MHz BW (5.8 GHz) (9.58 dBm) / Wi-Fi 802.11ac_40 MHz BW (5.8 GHz) (8.74 dBm) / Wi-Fi 802.11ac_80 MHz BW (5.8 GHz) (8.82 dBm)
Modulation Type	DSSS/CCK(802.11b), OFDM(802.11a, 802.11g, 802.11n, 802.11ac)	
Antenna Specification	Manufacturer: KOMATECH Co., Ltd. Antenna type: PIFA Antenna Peak Gain : 0.404 dBi (2.4 GHz Band), -8.243 dBi (5.8 GHz Band)	

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNFD956



3. TEST METHODOLOGY

FCC KDB 558074 D01 DTS Meas Guidance v03r01 dated April 09, 2013 entitled “Guidance for Performing Compliance Measurements on Digital Transmission Systems(DTS) and the measurement procedure described in the American National Standard for Testing Unlicensed Wireless Devices(ANSI C63.4-2003) Operating Under §15.247” were used in the measurement. For 802.11ac, KDB644545 D01 v01r01 dated April 08, 2013.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version :2003) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version: 2003)

Conducted Antenna Terminal

See Section from 9.1 to 9.2.(KDB 558074)

3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNFD956



4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2003) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated June 21, 2011 (Registration Number: 90661)

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

* The antennas of this E.U.T are permanently attached.

*The E.U.T Complies with the requirement of §15.203

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNFD956

7. SUMMARY TEST OF RESULTS


Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	CONDUCTED	PASS
Conducted Maximum Peak Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge(Out of Band Emissions)	§15.247(d)	Conducted < 20 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 8.6		PASS
Radiated Spurious Emissions	§15.205, 15.209	cf. Section 8.5.1	RADIATED	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 8.5.2		PASS

8. TEST RESULT

8.1 DUTY CYCLE(802.11a/b/g/n/ac)

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

TEST CONFIGURATION

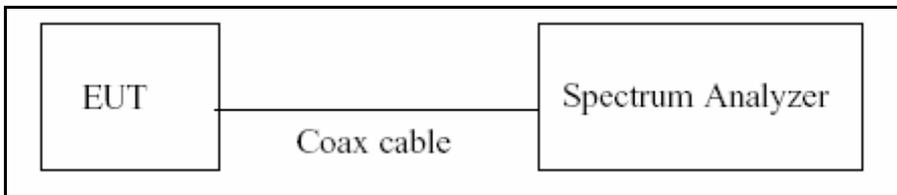

TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. We tested according to the zero-span measurement method, 6.0)b) in KDB 558074(issued 04/09/2013)

The largest available value of RBW is 8 MHz and VBW is 50 MHz. The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.

1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on}/T_{total} and Duty Cycle Factor = $10 \cdot \log(1/\text{Duty Cycle})$

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNFD956

Duty Cycle Factor

Mode	Data Rate	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
2.4 GHz Band 802.11b	1	12.390	12.510	0.99040767	0.042
	2	6.200	6.320	0.98101266	0.083
	5.5	2.305	2.411	0.95603484	0.195
	11	1.206	1.302	0.92626728	0.333
2.4 GHz Band 802.11g and 5.8 GHz Band 802.11a	6	2.057	2.170	0.94792627	0.232
	9	1.380	1.485	0.92929293	0.318
	12	1.044	1.146	0.91099476	0.405
	18	0.702	0.806	0.87096774	0.600
	24	0.530	0.634	0.83596215	0.778
	36	0.364	0.465	0.78279570	1.064
	48	0.275	0.377	0.72944297	1.370
2.4 GHz Band 802.11n_20 MHz BW and 5.8 GHz Band 802.11n_20 MHz BW	54	0.248	0.348	0.71264368	1.471
	6.5	1.915	2.020	0.94801980	0.232
	13	0.975	1.080	0.90277778	0.444
	19.5	0.662	0.764	0.86649215	0.622
	26	0.506	0.608	0.83223684	0.798
	39	0.351	0.452	0.77654867	1.098
	52	0.271	0.373	0.72654155	1.387
2.4 GHz & 5.8 GHz Band 802.11n_40 MHz BW	58.5	0.246	0.349	0.70487106	1.519
	65	0.226	0.329	0.68693009	1.631
	13.5	0.942	1.044	0.90229885	0.446
	27	0.491	0.592	0.82939189	0.812
	40.5	0.339	0.440	0.77045455	1.133
	54	0.263	0.364	0.72252747	1.411
	81	0.188	0.288	0.65277778	1.852
	108	0.152	0.252	0.60317460	2.196
2.4 GHz Band 802.11ac_20 MHz BW and 5.8 GHz Band 802.11ac_20 MHz BW	121.5	0.140	0.240	0.58333333	2.341
	135	0.128	0.228	0.56140351	2.507
	6.5	1.925	2.030	0.94827586	0.231
	13	0.987	1.089	0.90633609	0.427
	19.5	0.670	0.774	0.86563307	0.627
	26	0.514	0.618	0.83171521	0.800
	39	0.355	0.457	0.77680525	1.097
	52	0.279	0.381	0.73228346	1.353
	58.5	0.251	0.353	0.71104816	1.481
65	0.232	0.334	0.69461078	1.583	
78	0.200	0.301	0.66445183	1.775	

Mode	Data Rate	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
5.8 GHz Band 802.11ac_40 MHz BW	13.5	0.942	1.050	0.89714286	0.471
	27	0.495	0.596	0.83053691	0.806
	40.5	0.343	0.444	0.77252252	1.121
	54	0.267	0.368	0.72554348	1.393
	81	0.191	0.292	0.65410959	1.843
	108	0.155	0.265	0.58490566	2.329
	121.5	0.144	0.244	0.59016393	2.290
	135	0.131	0.232	0.56465517	2.482
	162	0.116	0.216	0.53703704	2.700
	180	0.112	0.212	0.52830189	2.771
5.8 GHz Band 802.11ac_80 MHz BW	29.3	0.458	0.559	0.81932021	0.865
	58.5	0.251	0.352	0.71306818	1.469
	87.8	0.180	0.280	0.64285714	1.919
	117	0.148	0.248	0.59677419	2.242
	175.5	0.112	0.212	0.52830189	2.771
	234	0.096	0.196	0.48979592	3.100
	263.3	0.088	0.188	0.46808511	3.297
	292.5	0.084	0.184	0.45652174	3.405
	351	0.075	0.176	0.42613636	3.705
	390	0.071	0.172	0.41279070	3.843


8.2 6dB BANDWIDTH (802.11a/b/g/n/ac)

Test Requirements and limit, §15.247(a)(2)

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

The minimum permissible 6dB bandwidth is 500 kHz.

TEST CONFIGURATION

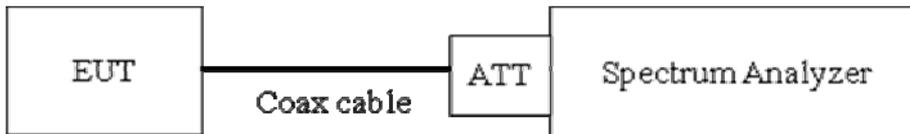

TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Page 5 in KDB 558074, issued 04/09/2013)

RBW = 100 kHz

VBW \geq 3 x RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Allow the trace to stabilize

Note : We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNFD956



TEST RESULTS

2.4 GHz Band

Conducted 6dB Bandwidth Measurements for 802.11b

802.11b Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	9.569	0.500	Pass
2437	6	9.096	0.500	Pass
2462	11	9.090	0.500	Pass

Conducted 6dB Bandwidth Measurements for 802.11g

802.11g Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	16.37	0.500	Pass
2437	6	16.40	0.500	Pass
2462	11	16.38	0.500	Pass

Conducted 6dB Bandwidth Measurements for 802.11n_20 MHz BW

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	17.36	0.500	Pass
2437	6	17.61	0.500	Pass
2462	11	17.63	0.500	Pass

Conducted 6 dB Bandwidth Measurements for 802.11ac_20 MHz BW

802.11ac Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	17.39	0.500	Pass
2437	6	17.60	0.500	Pass
2462	11	17.62	0.500	Pass

5.8 GHz Band

Conducted 6 dB Bandwidth Measurements for 802.11a

802.11a Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	16.39	0.500	Pass
5785	157	16.38	0.500	Pass
5825	165	16.40	0.500	Pass

Conducted 6 dB Bandwidth Measurements for 802.11n_20 MHz BW

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	17.62	0.500	Pass
5785	157	17.65	0.500	Pass
5825	165	17.62	0.500	Pass

Conducted 6 dB Bandwidth Measurements for 802.11n_40 MHz BW

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5755	151	36.41	0.500	Pass
5795	159	36.42	0.500	Pass

Conducted 6 dB Bandwidth Measurements for 802.11ac_20 MHz BW

802.11ac Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5745	149	17.63	0.500	Pass
5785	157	17.63	0.500	Pass
5825	165	17.63	0.500	Pass

Conducted 6 dB Bandwidth Measurements for 802.11ac_40 MHz BW

802.11ac Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5755	151	36.39	0.500	Pass
5795	159	36.36	0.500	Pass

Conducted 6 dB Bandwidth Measurements for 802.11ac_80 MHz BW

802.11ac Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
5775	155	75.60	0.500	Pass


Note : In order to simplify the report, attached plots were only the most wide 6 dB BW channel.




RESULT PLOTS

2.4 GHz Band

6dB Bandwidth plot (802.11b-CH 1)

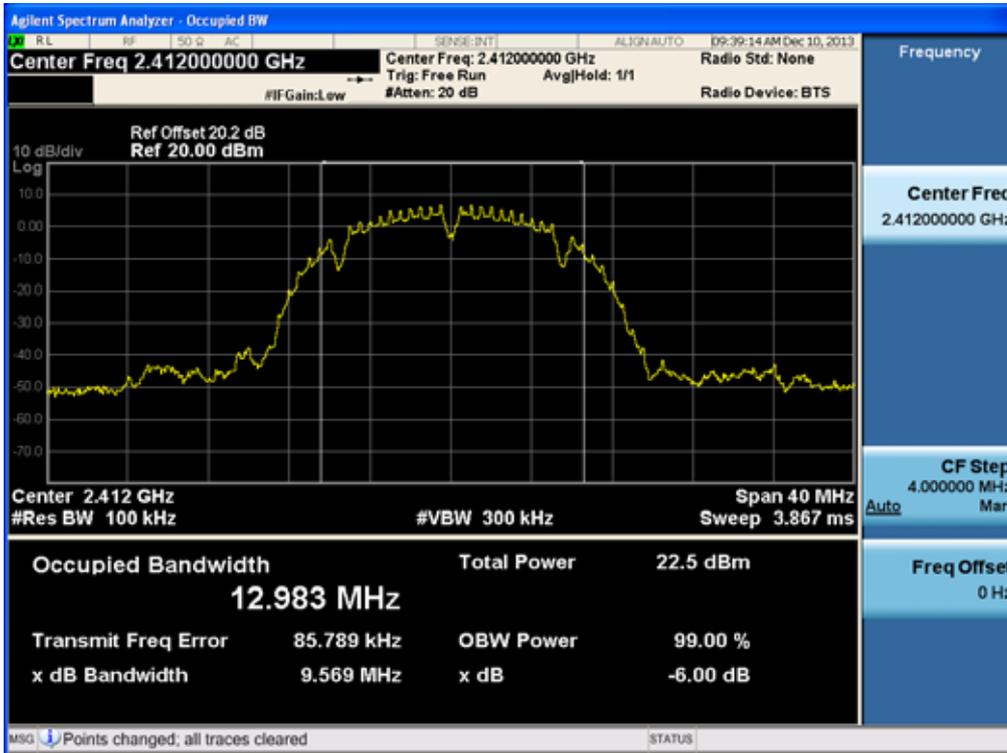


6dB Bandwidth plot (802.11g-CH 6)

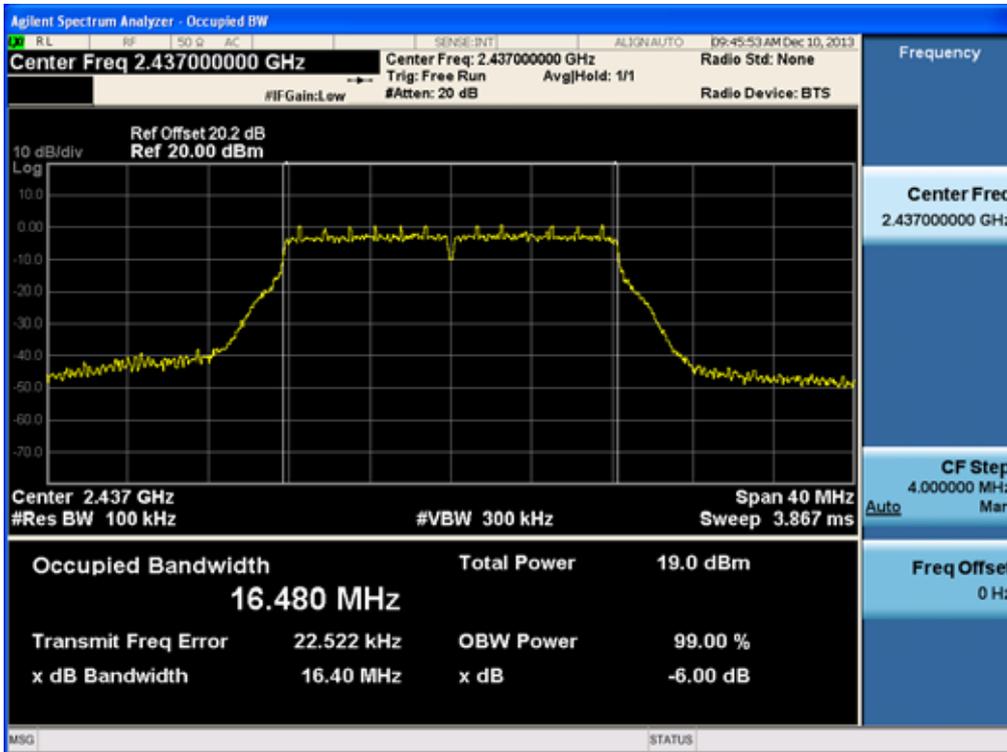


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNF956

6dB Bandwidth plot (802.11n-CH 11)

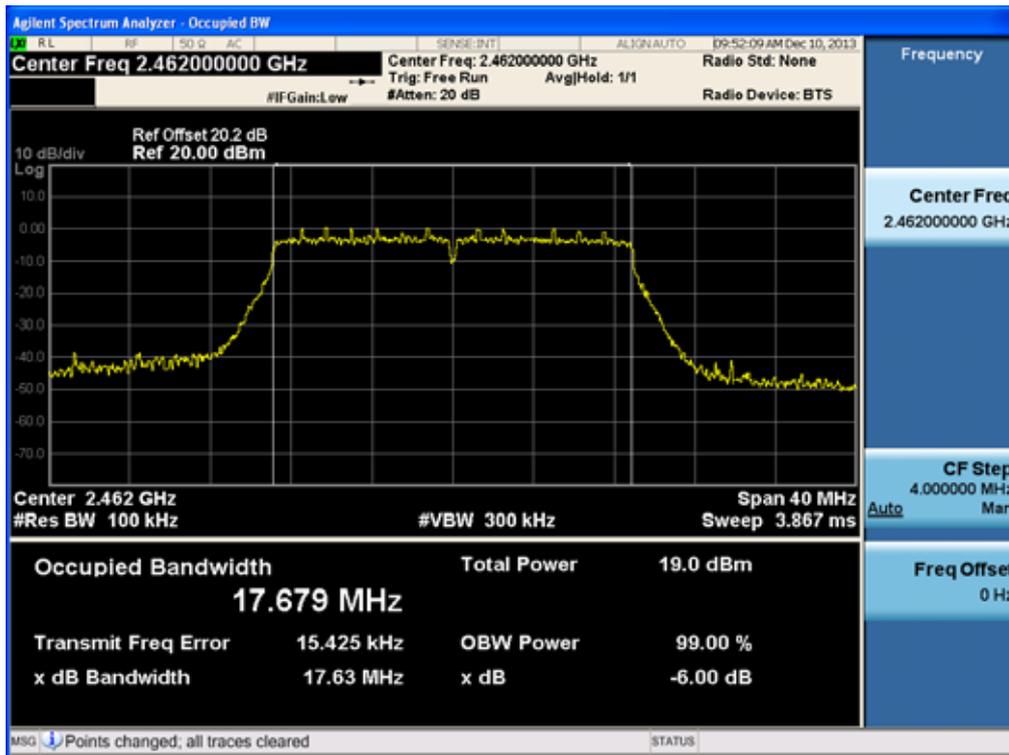


Conducted Output Power (802.11ac-CH 11)

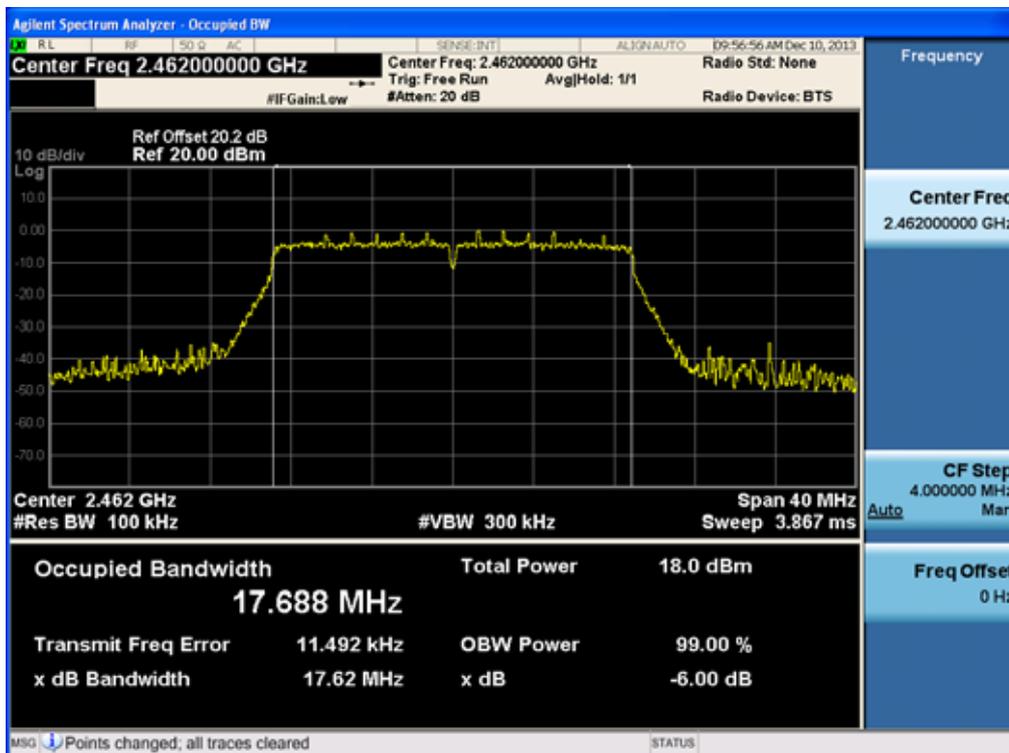


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNFD956

5.8 GHz Band


6dB Bandwidth plot (802.11a-CH 165)

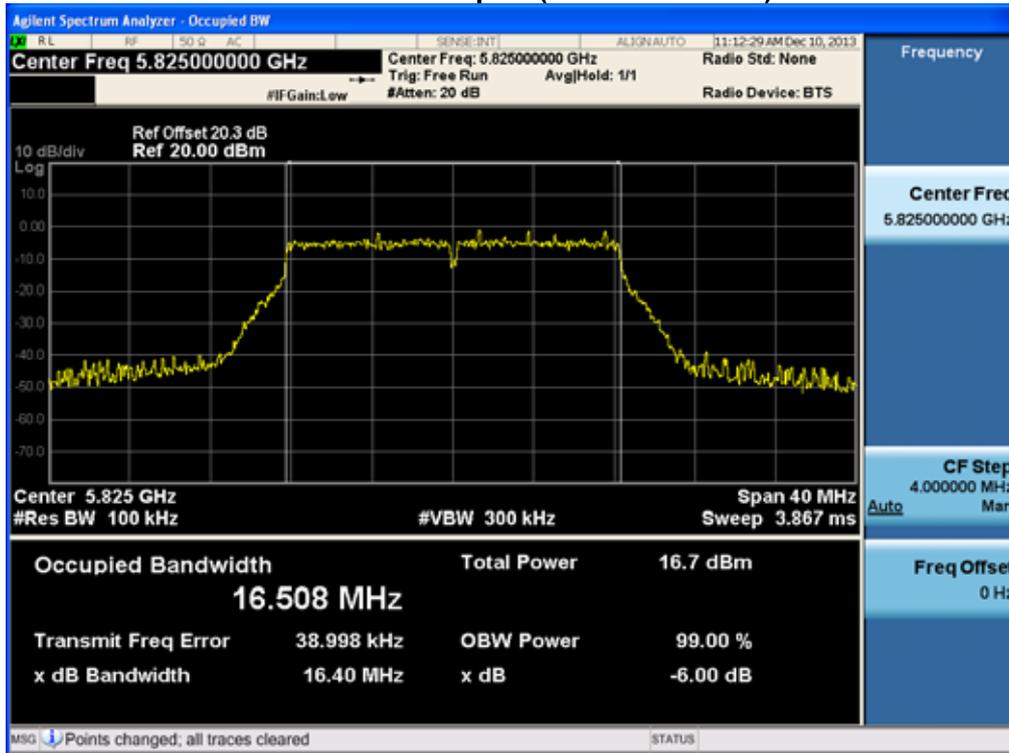


6dB Bandwidth plot (802.11n_20 MHz BW-CH 157)

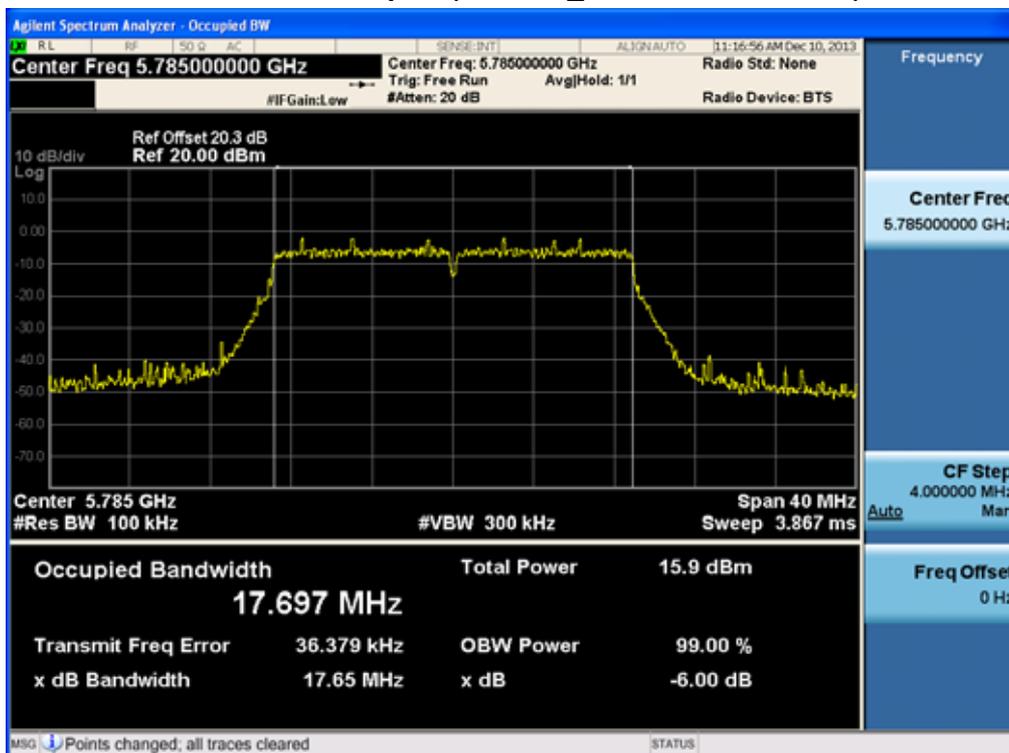


6dB Bandwidth plot (802.11n_40 MHz BW-CH 159)

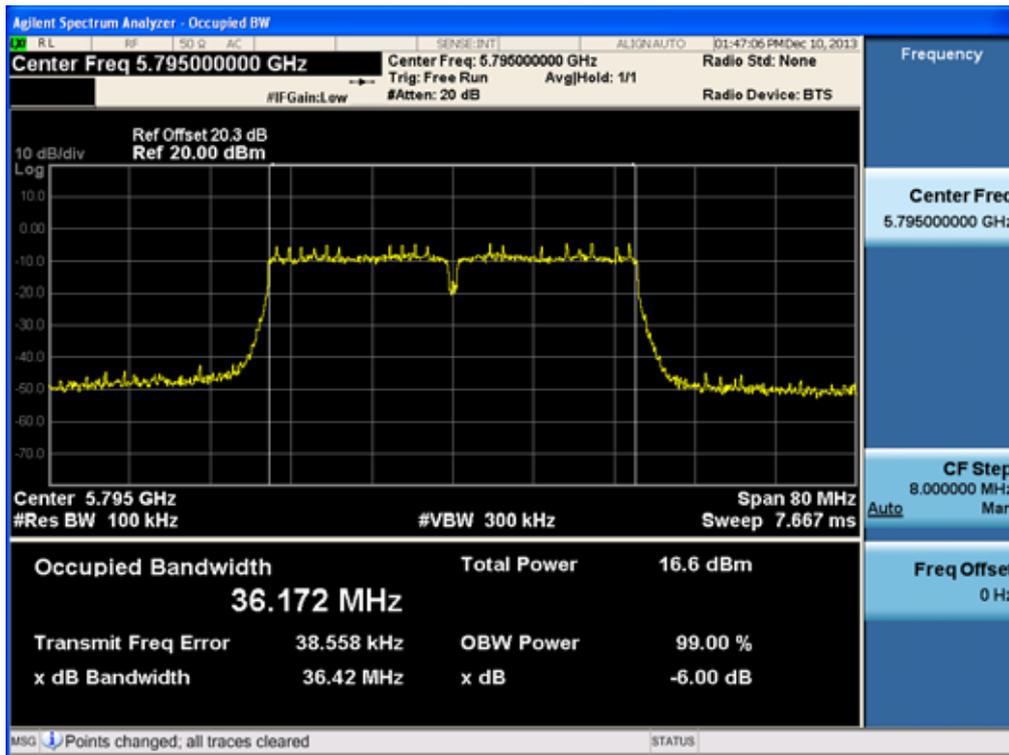


6dB Bandwidth plot (802.11ac_20 MHz BW-CH 157)

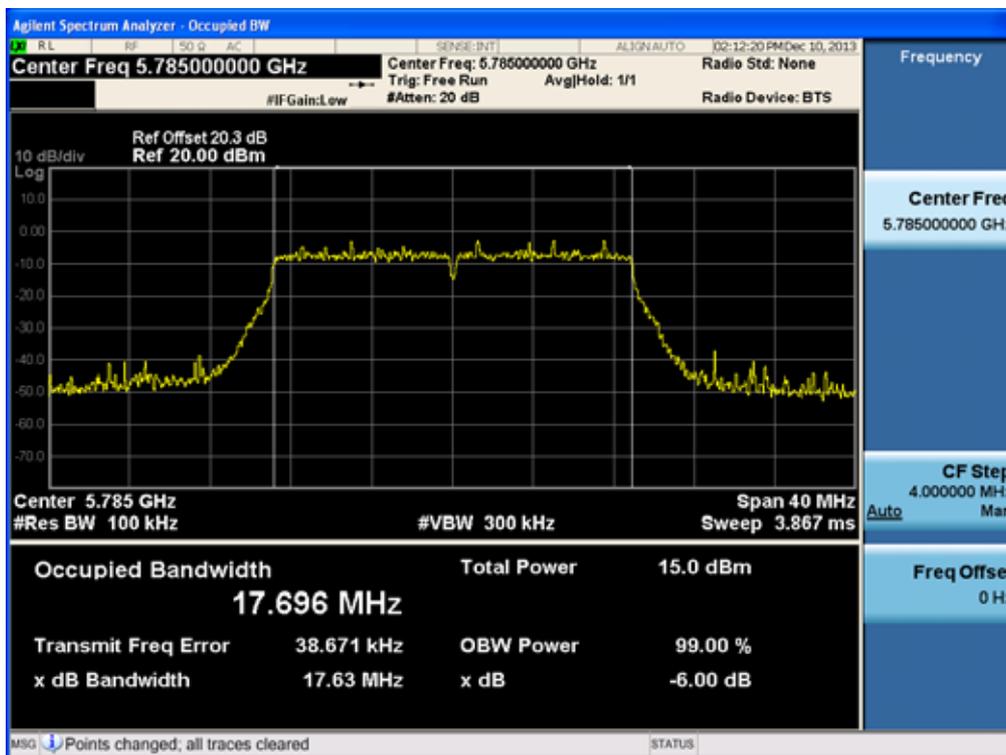

6dB Bandwidth plot (802.11ac_40 MHz BW-CH 151)

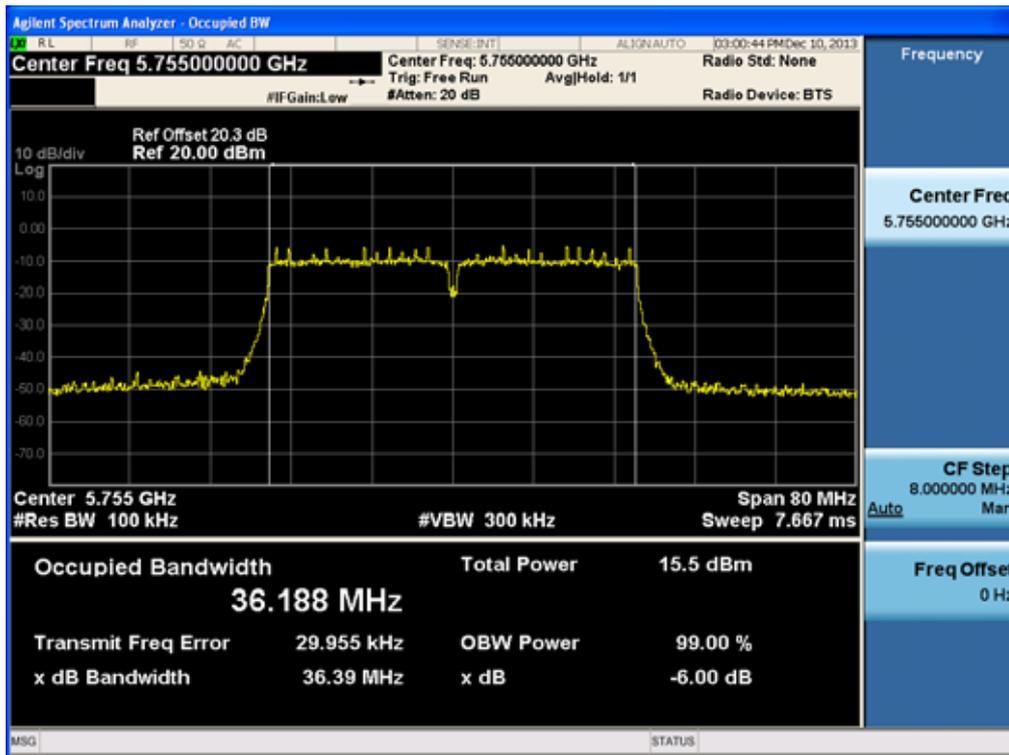

6dB Bandwidth plot (802.11ac_80 MHz BW-CH 155)

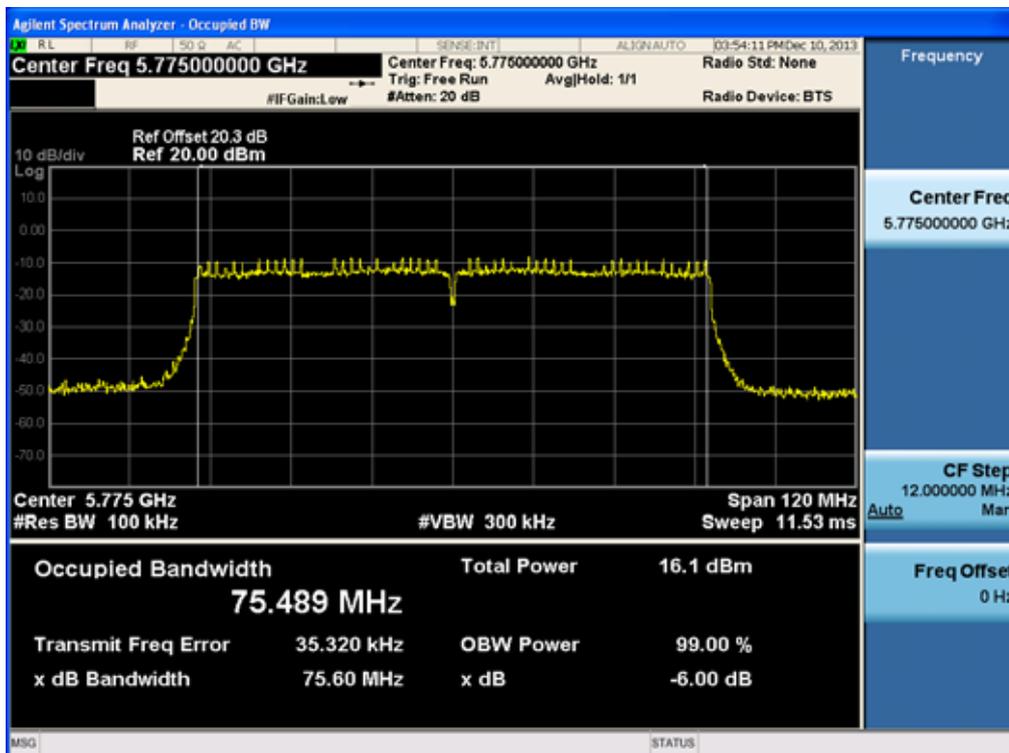


8.3 OUTPUT POWER (802.11a/b/g/n/ac)

Test Requirements and limit, §15.247(b)(3)

The transmitter output is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt.

TEST CONFIGURATION(20 MHz BW)

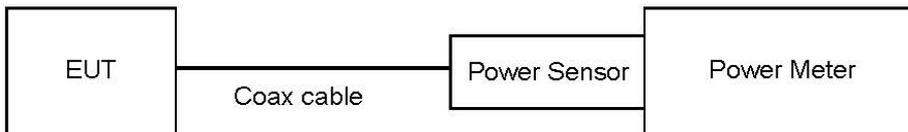

TEST PROCEDURE(20 MHz BW)

- Peak Power (Procedure 9.1.3 in KDB 558074, issued 04/09/2013)
 1. Measure the peak power of the transmitter.
- Average Power (Procedure 9.2.3.1 in KDB 558074, issued 04/09/2013)
 1. Measure the duty cycle.
 2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 3. Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Note :

1. We apply to the offset in the 2.4 GHz and 5.8 GHz range that was rounded off to the closest tenth dB. So, 20.2 dB is offset for 2.4 GHz Band and 20.3 dB is offset for 5.8 GHz Band.


Actual value of loss for the attenuator and cable combination is below table.

Band	Frequency(MHz)	Loss(dB)
2.4 GHz	2412	20.21
	2437	20.24
	2462	20.24
5.8 GHz	5745	20.31
	5755	20.30
	5785	20.29
	5795	20.26
	5825	20.28

(Actual value of loss for the attenuator and cable combination)

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNFD956

TEST CONFIGURATION(40 MHz & 80 MHz BW)

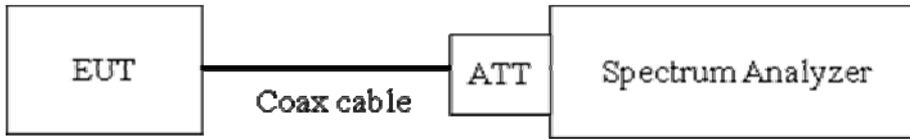

TEST PROCEDURE(40 MHz & 80 MHz BW)

The transmitter output is connected to the Spectrum Analyzer. We use the spectrum analyzer's integrated band power measurement function.

The Spectrum Analyzer is set to

- Peak Power (Procedure 9.1.2 in KDB 558074, issued 04/09/2013)

RBW = 1 MHz

VBW $\geq 3 \times$ RBW

SPAN $\geq 1.5 \times$ DTS bandwidth

Detector Mode = Peak

Sweep = auto couple

Trace Mode = max hold

Allow trace to fully stabilize.

Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select peak detector).

- Average Power (Procedure 9.2.2.4 in KDB 558074, issued 04/09/2013)

Measure the duty cycle

Set span to at least 1.5 times the OBW

RBW = 1-5 % of the OBW, not to exceed 1 MHz.

VBW $\geq 3 \times$ RBW.

Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)

Sweep time = auto.

Detector = RMS(i.e., power averaging)

Do not use sweep triggering. Allow the sweep to "free run".

Trace average at least 100 traces in power averaging(RMS) mode.

Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges.

Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNFD956



Sample Calculation

Output Power = Reading Value + ATT loss + Cable loss(1 ea) + Duty Cycle Factor

Output Power = 10 dBm + 20 dB + 0.8 dB + 0.2 dB = 31.0 dBm

Note :

1. Spectrum reading values are not plot data. The power results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz and 5.8 GHz range that was rounded off to the closest tenth dB. So, 10.2 dB is offset for 2.4 GHz Band and 10.3 dB is offset for 5.8 GHz Band.
Actual value of loss for the attenuator and cable combination is below table.

Band	Frequency(MHz)	Loss(dB)
2.4 GHz	2412	20.21
	2437	20.24
	2462	20.24
5.8 GHz	5745	20.31
	5755	20.30
	5785	20.29
	5795	20.26
	5825	20.28

(Actual value of loss for the attenuator and cable combination)

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNFD956



TEST RESULTS-Peak

2.4 GHz Band

Conducted Output Power Measurements (802.11b Mode)

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	1	18.84	30
		2	18.88	30
		5.5	18.94	30
		11	18.97	30
2437	6	1	19.54	30
		2	19.52	30
		5.5	19.61	30
		11	19.66	30
2462	11	1	19.67	30
		2	19.62	30
		5.5	19.62	30
		11	19.65	30

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID		FCC ID: ZNF956

Conducted Output Power Measurements (802.11g Mode)

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	6	22.69	30
		9	22.37	30
		12	22.51	30
		18	22.05	30
		24	21.64	30
		36	21.89	30
		48	23.13	30
		54	21.52	30
2437	6	6	23.23	30
		9	22.85	30
		12	23.05	30
		18	22.87	30
		24	22.43	30
		36	22.46	30
		48	23.14	30
		54	22.19	30
2462	11	6	22.98	30
		9	22.82	30
		12	23.07	30
		18	22.90	30
		24	22.43	30
		36	22.43	30
		48	23.22	30
		54	21.76	30

Conducted Output Power Measurements (802.11n Mode)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	6.5	22.73	30
		13	22.50	30
		19.5	22.85	30
		26	22.89	30
		39	22.83	30
		52	23.65	30
		58.5	22.87	30
		65	22.99	30
2437	6	6.5	23.30	30
		13	23.19	30
		19.5	23.24	30
		26	23.57	30
		39	23.41	30
		52	24.06	30
		58.5	23.33	30
		65	23.19	30
2462	11	6.5	23.06	30
		13	23.47	30
		19.5	23.23	30
		26	23.61	30
		39	23.13	30
		52	24.06	30
		58.5	23.46	30
		65	23.22	30

Conducted Output Power Measurements (802.11ac Mode)

802.11ac Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	6.5	22.01	30
		13	21.99	30
		19.5	21.68	30
		26	22.08	30
		39	21.43	30
		52	21.97	30
		58.5	22.34	30
		65	21.51	30
		78	21.50	30
2437	6	6.5	22.45	30
		13	22.11	30
		19.5	22.08	30
		26	22.53	30
		39	22.46	30
		52	22.71	30
		58.5	22.71	30
		65	22.19	30
		78	22.39	30
2462	11	6.5	22.13	30
		13	21.96	30
		19.5	22.08	30
		26	22.07	30
		39	22.05	30
		52	22.56	30
		58.5	22.49	30
		65	22.15	30
		78	22.29	30

5.8 GHz Band

Conducted Output Power Measurements (802.11a Mode: 5745~5825)

802.11a Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
5745	149	6	21.85	30
		9	21.72	30
		12	22.34	30
		18	22.49	30
		24	21.96	30
		36	21.92	30
		48	23.17	30
		54	22.30	30
5785	157	6	21.88	30
		9	21.61	30
		12	22.26	30
		18	22.43	30
		24	21.66	30
		36	21.71	30
		48	22.46	30
		54	21.15	30
5825	165	6	21.58	30
		9	21.75	30
		12	21.96	30
		18	22.14	30
		24	21.53	30
		36	21.36	30
		48	22.60	30
		54	21.12	30

Conducted Output Power Measurements (802.11n_20 MHz BW Mode: 5745~5825)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
5745	149	6.5	21.53	30
		13	21.65	30
		19.5	22.27	30
		26	21.79	30
		39	22.11	30
		52	22.21	30
		58.5	21.86	30
		65	22.03	30
5785	157	6.5	21.93	30
		13	22.01	30
		19.5	21.96	30
		26	21.66	30
		39	21.70	30
		52	23.06	30
		58.5	21.91	30
		65	21.78	30
5825	165	6.5	21.64	30
		13	21.30	30
		19.5	21.76	30
		26	21.59	30
		39	21.72	30
		52	23.04	30
		58.5	21.67	30
		65	21.57	30

Conducted Output Power Measurements (802.11n_40 MHz BW Mode: 5755~5795)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
5755	151	13.5	16.92	30
		27	16.73	30
		40.5	16.64	30
		54	16.87	30
		81	16.90	30
		108	16.84	30
		121.5	16.68	30
		135	16.68	30
5795	159	13.5	17.18	30
		27	16.91	30
		40.5	16.86	30
		54	16.60	30
		81	17.08	30
		108	17.09	30
		121.5	16.86	30
		135	16.28	30

Conducted Output Power Measurements (802.11ac_20 MHz BW Mode: 5745~5825)

802.11ac Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
5745	149	6.5	21.85	30
		13	20.92	30
		19.5	20.84	30
		26	20.74	30
		39	20.80	30
		52	21.48	30
		58.5	21.83	30
		65	21.10	30
		78	20.77	30
5785	157	6.5	20.48	30
		13	20.42	30
		19.5	20.55	30
		26	20.82	30
		39	20.36	30
		52	21.50	30
		58.5	20.64	30
		65	20.84	30
		78	20.51	30
5825	165	6.5	20.96	30
		13	20.62	30
		19.5	20.43	30
		26	20.88	30
		39	20.39	30
		52	20.43	30
		58.5	20.48	30
		65	20.45	30
		78	20.43	30

Conducted Output Power Measurements (802.11ac_40 MHz BW Mode: 5755~5795)

802.11ac Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
5755	151	13.5	16.03	30
		27	15.66	30
		40.5	15.69	30
		54	16.08	30
		81	15.91	30
		108	15.86	30
		121.5	16.02	30
		135	15.83	30
		162	15.74	30
		180	15.67	30
5795	159	13.5	16.22	30
		27	15.32	30
		40.5	15.82	30
		54	15.75	30
		81	16.16	30
		108	15.66	30
		121.5	16.13	30
		135	15.48	30
		162	15.31	30
		180	16.00	30

Conducted Output Power Measurements (802.11ac_80 MHz BW Mode: 5775)

802.11ac Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
5775	155	29.3	16.26	30
		58.5	15.96	30
		87.8	15.90	30
		117	16.14	30
		175.5	16.01	30
		234	15.93	30
		263.3	15.95	30
		292.5	15.80	30
		351	15.91	30
		390	15.74	30



TEST RESULTS-Average

2.4 GHz Band

Conducted Output Power Measurements (802.11b Mode)

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	1	15.27	0.042	15.31	30
		2	15.26	0.083	15.35	30
		5.5	15.11	0.195	15.30	30
		11	15.03	0.333	15.36	30
2437	6	1	15.89	0.042	15.93	30
		2	15.93	0.083	16.02	30
		5.5	15.81	0.195	16.00	30
		11	15.66	0.333	15.99	30
2462	11	1	15.82	0.042	15.86	30
		2	15.74	0.083	15.82	30
		5.5	15.65	0.195	15.84	30
		11	15.54	0.333	15.88	30

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNFD956

Conducted Output Power Measurements (802.11g Mode)

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	6	11.41	0.232	11.64	30
		9	11.35	0.318	11.67	30
		12	11.13	0.405	11.54	30
		18	11.12	0.600	11.72	30
		24	10.83	0.778	11.61	30
		36	10.59	1.064	11.66	30
		48	10.47	1.370	11.84	30
		54	10.26	1.471	11.74	30
2437	6	6	12.09	0.232	12.32	30
		9	11.97	0.318	12.29	30
		12	11.92	0.405	12.33	30
		18	11.76	0.600	12.36	30
		24	11.60	0.778	12.38	30
		36	11.27	1.064	12.34	30
		48	11.11	1.370	12.48	30
		54	10.81	1.471	12.28	30
2462	11	6	11.96	0.232	12.19	30
		9	11.88	0.318	12.20	30
		12	11.76	0.405	12.16	30
		18	11.58	0.600	12.18	30
		24	11.42	0.778	12.20	30
		36	11.15	1.064	12.21	30
		48	10.98	1.370	12.35	30
		54	10.77	1.471	12.24	30

Conducted Output Power Measurements (802.11n Mode)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	6.5	11.23	0.232	11.46	30
		13	11.16	0.444	11.60	30
		19.5	10.90	0.622	11.52	30
		26	10.83	0.798	11.62	30
		39	10.59	1.098	11.68	30
		52	10.42	1.387	11.81	30
		58.5	10.26	1.519	11.77	30
		65	10.25	1.631	11.88	30
2437	6	6.5	11.93	0.232	12.16	30
		13	11.79	0.444	12.24	30
		19.5	11.69	0.622	12.32	30
		26	11.55	0.798	12.35	30
		39	11.31	1.098	12.41	30
		52	11.10	1.387	12.49	30
		58.5	10.88	1.519	12.40	30
		65	10.83	1.631	12.46	30
2462	11	6.5	11.88	0.232	12.12	30
		13	11.62	0.444	12.07	30
		19.5	11.56	0.622	12.18	30
		26	11.32	0.798	12.12	30
		39	11.12	1.098	12.22	30
		52	10.90	1.387	12.29	30
		58.5	10.74	1.519	12.26	30
		65	10.75	1.631	12.38	30

Conducted Output Power Measurements (802.11ac Mode)

802.11ac Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	6.5	10.28	0.231	10.51	30
		13	10.32	0.427	10.75	30
		19.5	9.93	0.627	10.55	30
		26	10.02	0.800	10.82	30
		39	9.55	1.097	10.65	30
		52	9.34	1.353	10.69	30
		58.5	9.45	1.481	10.93	30
		65	9.29	1.583	10.88	30
		78	9.01	1.775	10.79	30
2437	6	6.5	11.11	0.231	11.34	30
		13	10.90	0.427	11.32	30
		19.5	10.78	0.627	11.40	30
		26	10.45	0.800	11.25	30
		39	10.45	1.097	11.55	30
		52	10.03	1.353	11.39	30
		58.5	9.92	1.481	11.40	30
		65	9.86	1.583	11.44	30
		78	9.66	1.775	11.43	30
2462	11	6.5	11.06	0.231	11.29	30
		13	10.81	0.427	11.23	30
		19.5	10.61	0.627	11.24	30
		26	10.51	0.800	11.31	30
		39	10.02	1.097	11.11	30
		52	9.86	1.353	11.21	30
		58.5	9.73	1.481	11.21	30
		65	9.94	1.583	11.52	30
		78	9.75	1.775	11.53	30

5.8 GHz Band

Conducted Output Power Measurements (802.11a Mode: 5745~5825)

802.11a Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5745	149	6	11.13	0.232	11.36	30
		9	11.09	0.318	11.41	30
		12	11.03	0.405	11.43	30
		18	10.90	0.600	11.50	30
		24	10.72	0.778	11.50	30
		36	10.37	1.064	11.44	30
		48	10.13	1.370	11.50	30
		54	9.96	1.471	11.43	30
5785	157	6	11.00	0.232	11.23	30
		9	10.98	0.318	11.29	30
		12	10.93	0.405	11.34	30
		18	10.80	0.600	11.40	30
		24	10.50	0.778	11.28	30
		36	10.18	1.064	11.24	30
		48	10.01	1.370	11.38	30
		54	9.82	1.471	11.29	30
5825	165	6	10.82	0.232	11.06	30
		9	10.85	0.318	11.16	30
		12	10.75	0.405	11.16	30
		18	10.64	0.600	11.24	30
		24	10.35	0.778	11.13	30
		36	10.01	1.064	11.07	30
		48	9.85	1.370	11.22	30
		54	9.69	1.471	11.16	30

Conducted Output Power Measurements (802.11n_20 MHz BW Mode: 5745~5825)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5745	149	6.5	10.10	0.232	10.33	30
		13	10.00	0.444	10.44	30
		19.5	9.91	0.622	10.53	30
		26	9.77	0.798	10.57	30
		39	9.51	1.098	10.61	30
		52	9.29	1.387	10.67	30
		58.5	8.93	1.519	10.45	30
		65	8.86	1.631	10.49	30
5785	157	6.5	10.12	0.232	10.35	30
		13	9.89	0.444	10.33	30
		19.5	9.82	0.622	10.44	30
		26	9.66	0.798	10.46	30
		39	9.37	1.098	10.47	30
		52	9.08	1.387	10.47	30
		58.5	8.93	1.519	10.45	30
		65	8.67	1.631	10.30	30
5825	165	6.5	9.89	0.232	10.12	30
		13	9.80	0.444	10.24	30
		19.5	9.62	0.622	10.24	30
		26	9.52	0.798	10.32	30
		39	9.23	1.098	10.33	30
		52	9.01	1.387	10.40	30
		58.5	8.68	1.519	10.20	30
		65	8.55	1.631	10.18	30

Conducted Output Power Measurements (802.11n_40 MHz BW Mode: 5755~5795)

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5755	151	13.5	8.98	0.446	9.42	30
		27	8.56	0.812	9.37	30
		40.5	8.24	1.133	9.37	30
		54	7.85	1.411	9.26	30
		81	7.57	1.852	9.42	30
		108	7.06	2.196	9.25	30
		121.5	6.96	2.341	9.30	30
		135	6.83	2.507	9.34	30
5795	159	13.5	9.20	0.446	9.65	30
		27	8.97	0.812	9.78	30
		40.5	8.55	1.133	9.68	30
		54	7.57	1.411	8.98	30
		81	7.60	1.852	9.45	30
		108	7.43	2.196	9.62	30
		121.5	6.96	2.341	9.31	30
		135	6.34	2.507	8.85	30

Conducted Output Power Measurements (802.11ac_20 MHz BW Mode: 5745~5825)

802.11ac Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5745	149	6.5	9.23	0.231	9.46	30
		13	9.11	0.427	9.54	30
		19.5	8.83	0.627	9.46	30
		26	8.61	0.800	9.41	30
		39	8.38	1.097	9.47	30
		52	8.19	1.353	9.54	30
		58.5	8.10	1.481	9.58	30
		65	7.89	1.583	9.48	30
		78	7.65	1.775	9.43	30
5785	157	6.5	9.03	0.231	9.26	30
		13	8.88	0.427	9.31	30
		19.5	8.77	0.627	9.40	30
		26	8.57	0.800	9.37	30
		39	8.26	1.097	9.35	30
		52	8.02	1.353	9.38	30
		58.5	7.91	1.481	9.39	30
		65	7.75	1.583	9.33	30
		78	7.56	1.775	9.34	30
5825	165	6.5	8.93	0.231	9.16	30
		13	8.74	0.427	9.17	30
		19.5	8.48	0.627	9.10	30
		26	8.37	0.800	9.17	30
		39	8.12	1.097	9.22	30
		52	7.91	1.353	9.26	30
		58.5	7.68	1.481	9.16	30
		65	7.55	1.583	9.13	30
		78	7.40	1.775	9.18	30



Conducted Output Power Measurements (802.11ac_40 MHz BW Mode: 5755~5795)

802.11ac Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5755	151	13.5	8.12	0.471	8.59	30
		27	7.61	0.806	8.42	30
		40.5	7.43	1.121	8.55	30
		54	7.14	1.393	8.53	30
		81	6.68	1.843	8.52	30
		108	6.24	2.329	8.57	30
		121.5	6.24	2.290	8.53	30
		135	5.99	2.482	8.47	30
		162	5.67	2.700	8.37	30
		180	5.52	2.771	8.29	30
5795	159	13.5	8.25	0.471	8.73	30
		27	7.35	0.806	8.15	30
		40.5	7.53	1.121	8.65	30
		54	6.69	1.393	8.08	30
		81	6.89	1.843	8.74	30
		108	6.00	2.329	8.33	30
		121.5	6.40	2.290	8.69	30
		135	5.58	2.482	8.06	30
		162	5.32	2.700	8.02	30
		180	5.87	2.771	8.64	30

Conducted Output Power Measurements (802.11ac_80 MHz BW Mode: 5755)


802.11ac Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
5775	155	29.3	7.88	0.865	8.74	30
		58.5	7.30	1.469	8.77	30
		87.8	6.83	1.919	8.75	30
		117	6.48	2.242	8.72	30
		175.5	5.94	2.771	8.71	30
		234	5.61	3.100	8.71	30
		263.3	5.47	3.297	8.76	30
		292.5	5.33	3.405	8.74	30
		351	5.11	3.705	8.82	30
		390	4.92	3.843	8.76	30

Note : In order to simplify the report, attached plots were only the highest conducted power channel and data rate.




RESULT PLOTS-Peak
40 MHz BW
(5755 MHz ~5795 MHz)

Conducted Output Power (802.11n-CH 159) 13.5 Mbps

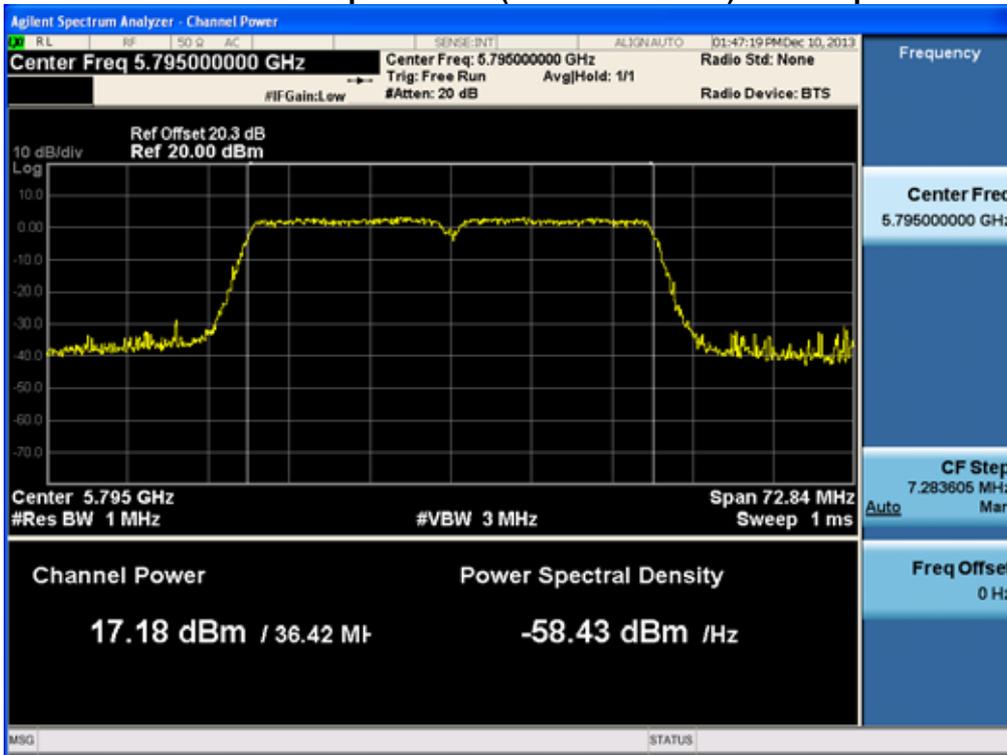

Conducted Output Power (802.11ac-CH 159) 13.5 Mbps

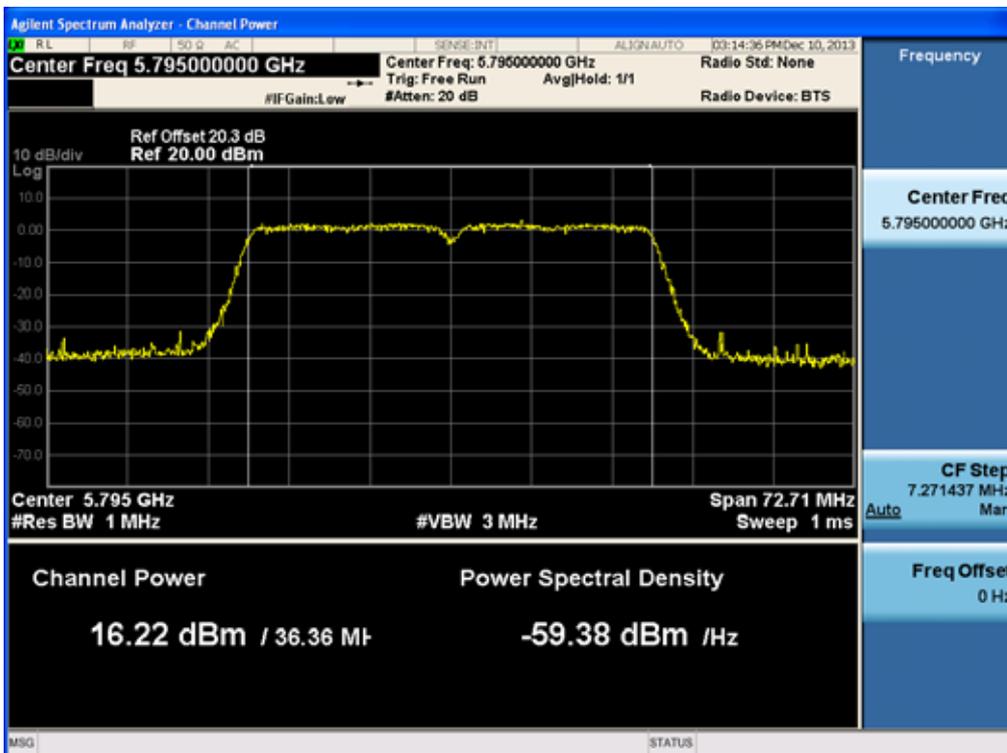


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNF956



80 MHz BW
(5775 MHz)

Conducted Output Power (802.11ac-CH 155) 29.3 Mbps

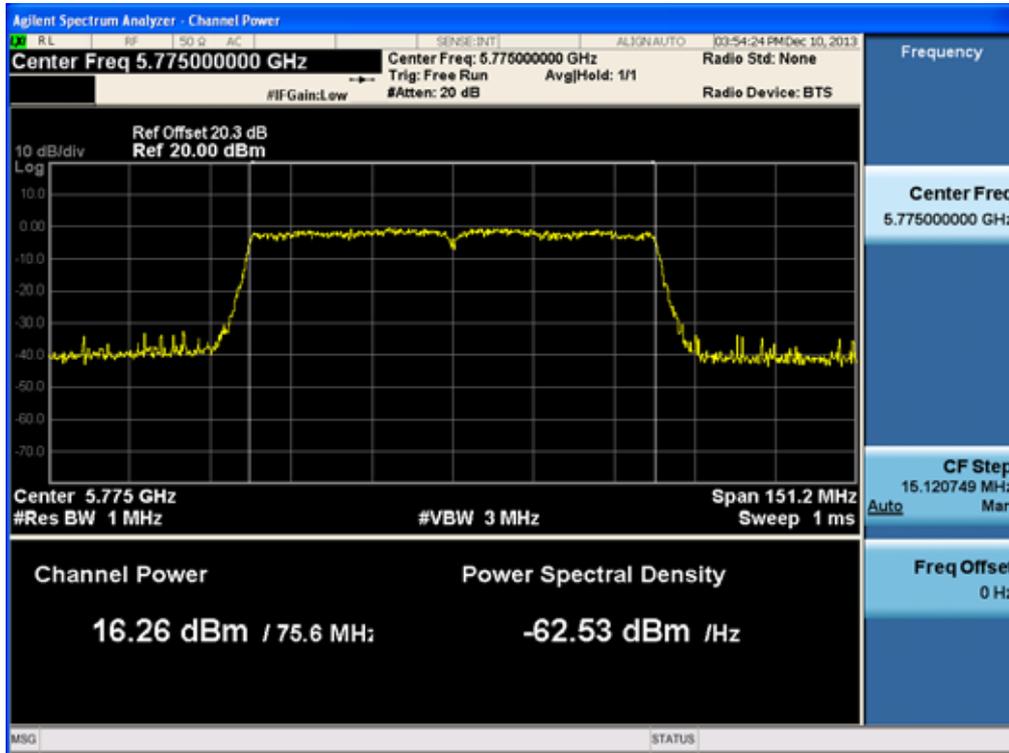


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNFD956




RESULT PLOTS-Average
40 MHz BW
(5755 MHz ~5795 MHz)

Conducted Output Power (802.11n-CH 159) 27 Mbps

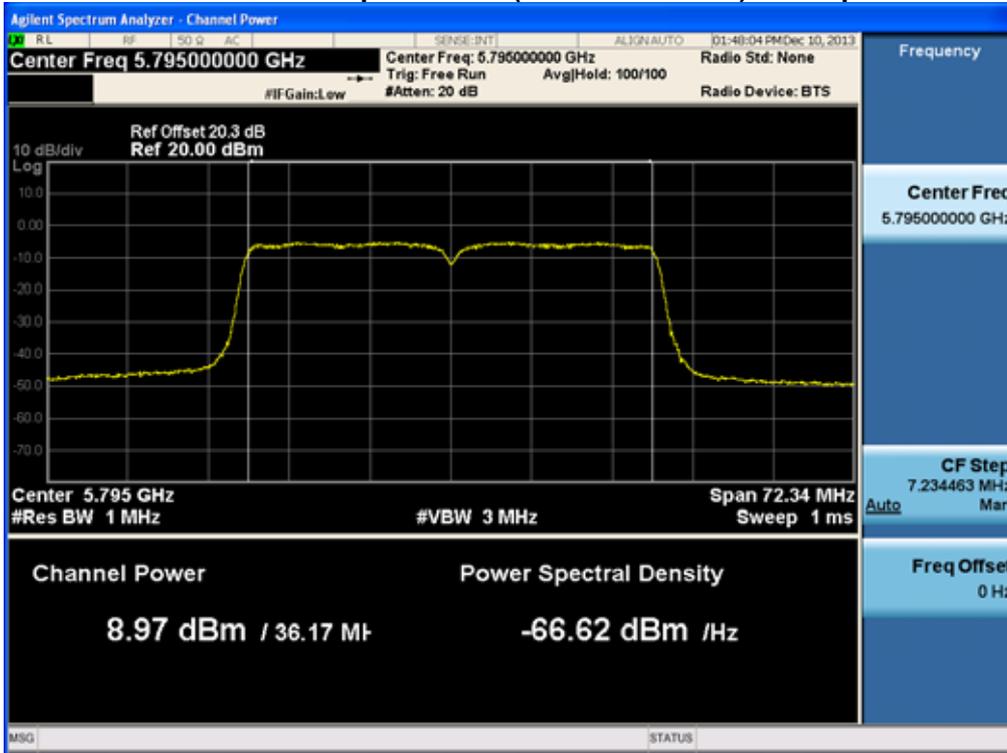

Conducted Output Power (802.11ac-CH 159) 81 Mbps

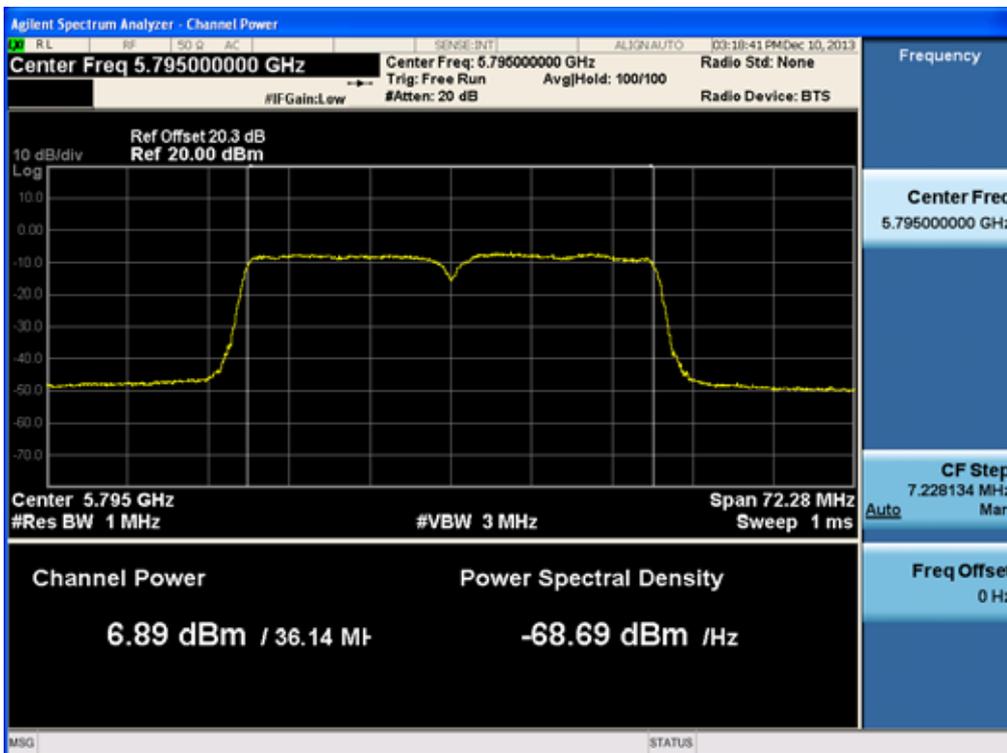


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNF0956



80 MHz BW
(5775 MHz)

Conducted Output Power (802.11ac-CH 155) 351 Mbps

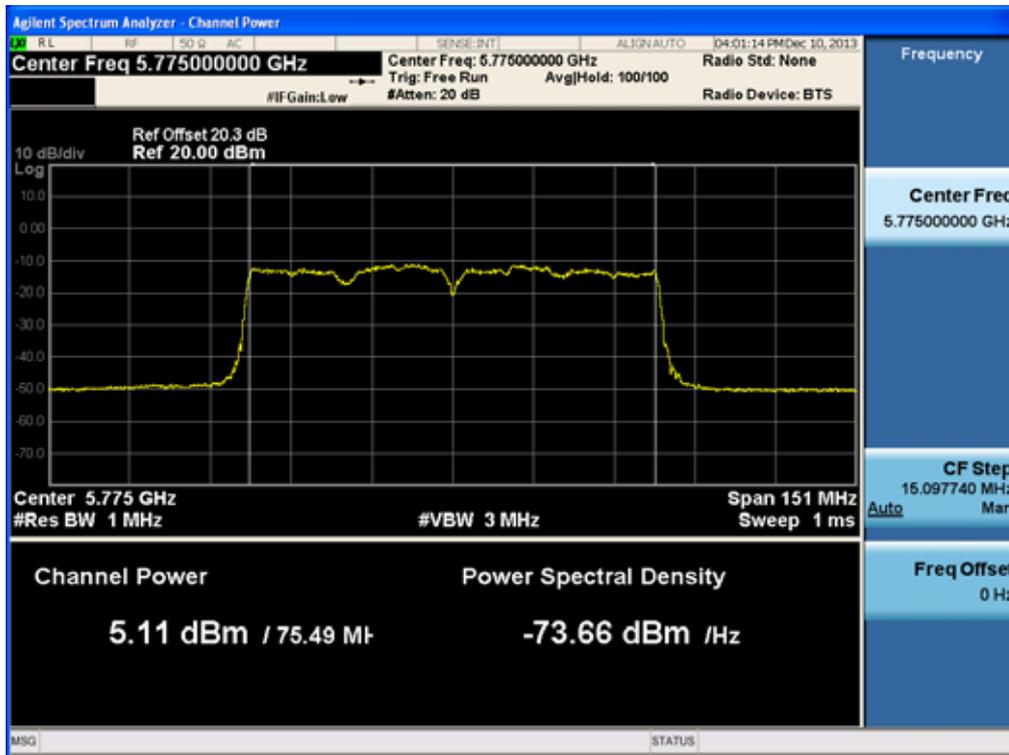

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNFD956


8.4 POWER SPECTRAL DENSITY (802.11a/b/g/n/ac)

Test Requirements and limit, §15.247(e)

The peak power spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

Minimum Standard – the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST CONFIGURATION



TEST PROCEDURE

We tested according to Procedure 10.2 in KDB 558074, issued 04/09/2013

The spectrum analyzer is set to :

Set analyzer center frequency to DTS channel center frequency.

Span = 1.5 times the DTS channel bandwidth.

RBW = 3 kHz ≤ RBW ≤ 100 kHz.

VBW ≥ 3 x RBW.

Sweep = auto couple

Detector = peak

Trace Mode = max hold

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Sample Calculation

$$\begin{aligned} \text{PSD} &= \text{Reading Value} + \text{ATT loss} + \text{Cable loss}(1 \text{ ea}) \\ &= -5 \text{ dBm} + 10 \text{ dB} + 0.8 \text{ dB} = 5.8 \text{ dBm} \end{aligned}$$

Note :

1. Spectrum reading values are not plot data. The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz and 5.8 GHz range that was rounded off to the closest tenth dB. So, 20.2 dB is offset for 2.4 GHz Band and 20.3 dB is offset for 5.8 GHz Band.
Actual value of loss for the attenuator and cable combination is below table.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNFD956

Band	Frequency(MHz)	Loss(dB)
2.4 GHz	2412	20.21
	2437	20.24
	2462	20.24
5.8 GHz	5745	20.31
	5755	20.30
	5785	20.29
	5795	20.26
	5825	20.28

(Actual value of loss for the attenuator and cable combination)

TEST RESULTS

Conducted Power Density Measurements


Frequency (MHz)	Channel No.	Mode	Test Result		
			PSD (dBm)	Limit (dBm)	Pass/Fail
2412	1	802.11b	-8.318	8	Pass
2437	6		-7.286		Pass
2462	11		-7.027		Pass
2412	1	802.11g	-15.022		Pass
2437	6		-13.246		Pass
2462	11		-13.969		Pass
2412	1	802.11n(20M) 2.4 GHz Band	-14.161		Pass
2437	6		-13.736		Pass
2462	11		-14.439		Pass
2412	1	802.11ac 2.4 GHz Band	-15.150		Pass
2437	6		-14.763		Pass
2462	11		-14.450		Pass
5745	149	802.11a	-15.713		Pass
5785	157		-15.740		Pass
5825	165		-15.500		Pass
5745	149	802.11n_20 MHz BW 5.8 GHz Band	-15.975		Pass
5785	157	5.8 GHz Band	-16.376		Pass
5825	165		-16.081		Pass
5755	151	802.11n_40 MHz BW 5.8 GHz Band	-17.325		Pass
5795	159	5.8 GHz Band	-19.484		Pass
5745	149		802.11ac_20 MHz BW 5.8 GHz Band	-17.143	Pass
5785	157	5.8 GHz Band	-17.419	Pass	
5825	165		-16.661	Pass	
5755	151	802.11ac_40 MHz BW 5.8 GHz Band	-18.022	Pass	
5795	159	5.8 GHz Band	-20.860	Pass	
5775	155		802.11ac_80MHz BW 5.8 GHz Band	-23.833	Pass

Note : In order to simplify the report, attached plots were only the highest PSD channels.


RESULT PLOTS

2.4 GHz Band

Power Spectral Density (802.11b-CH 11)

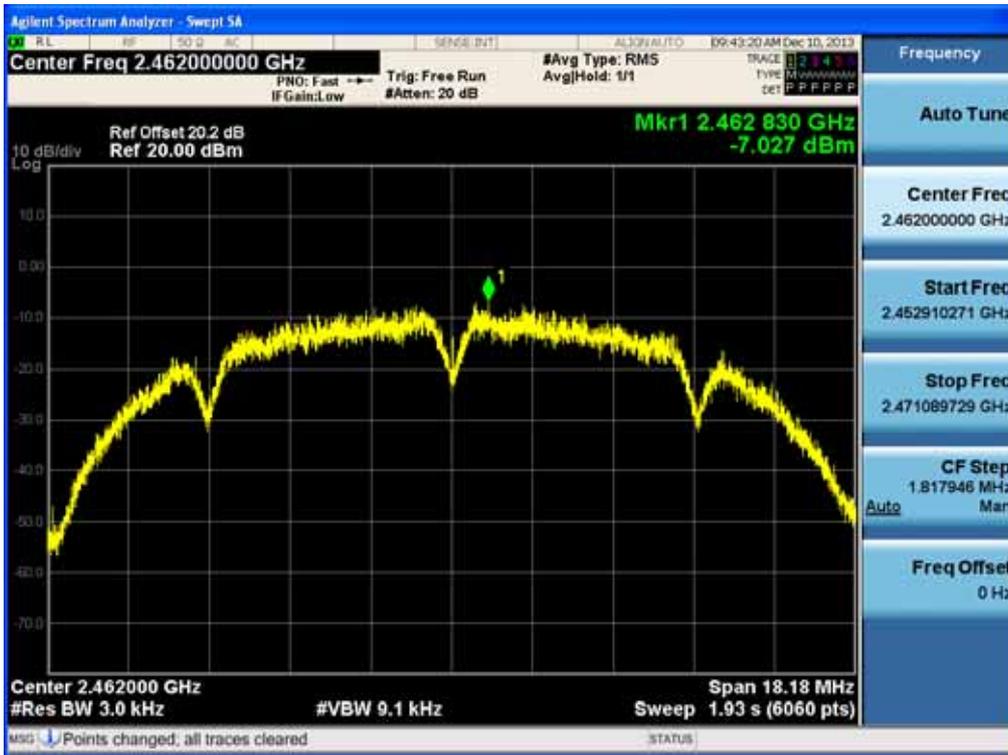


Power Spectral Density (802.11g-CH 6)

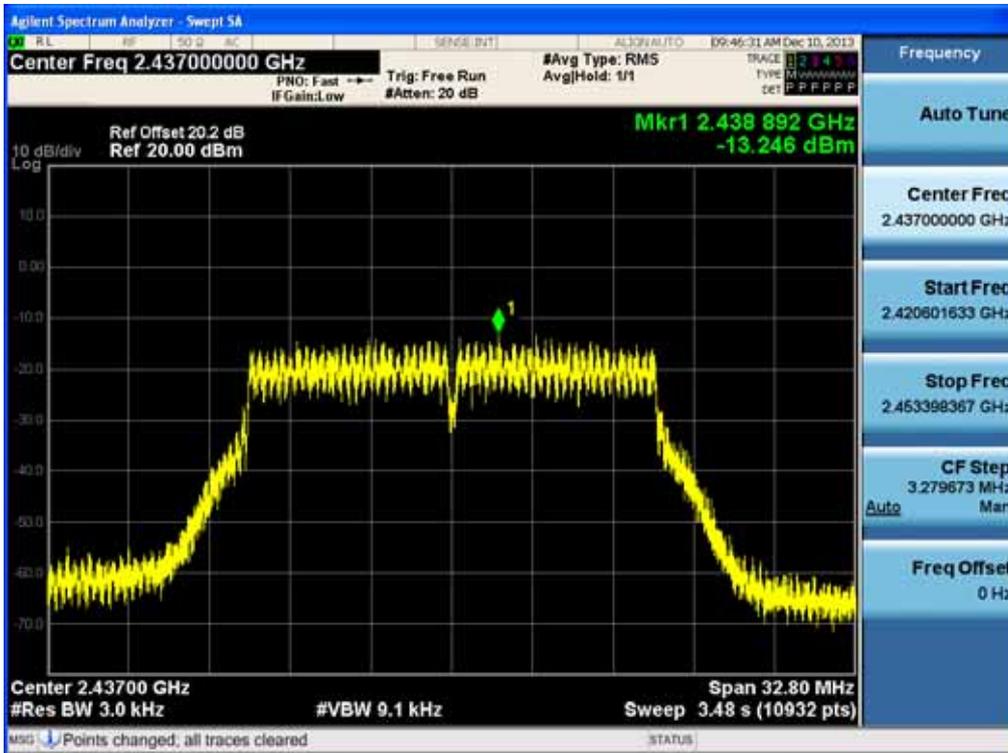


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNF956

Power Spectral Density (802.11n-CH 6)

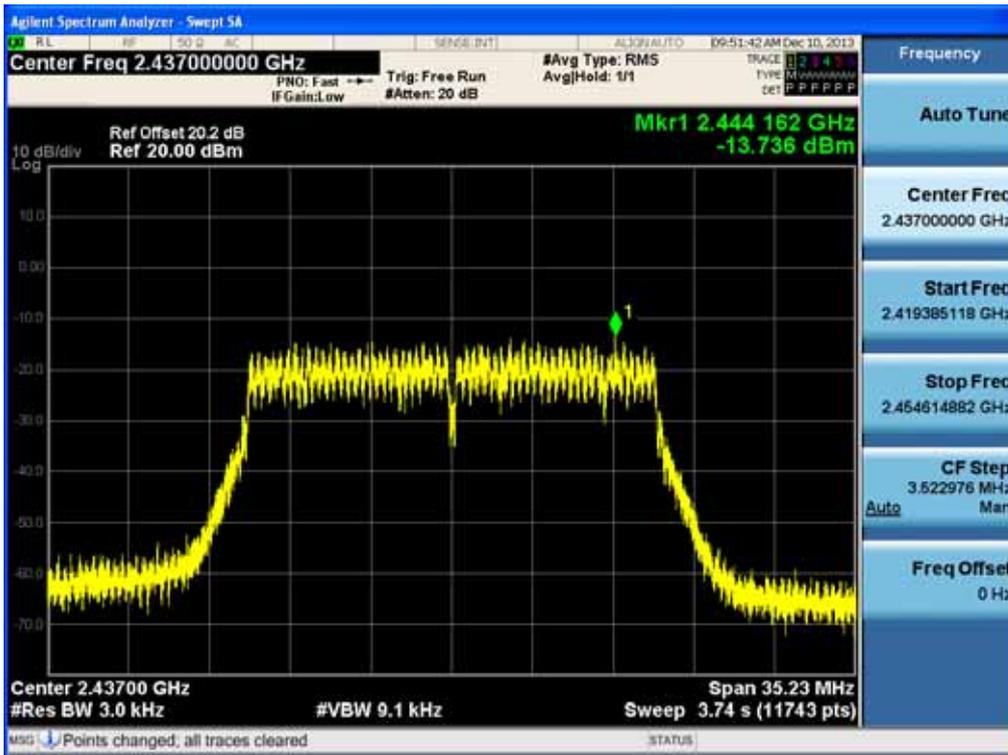

Power Spectral Density (802.11ac-CH 11)

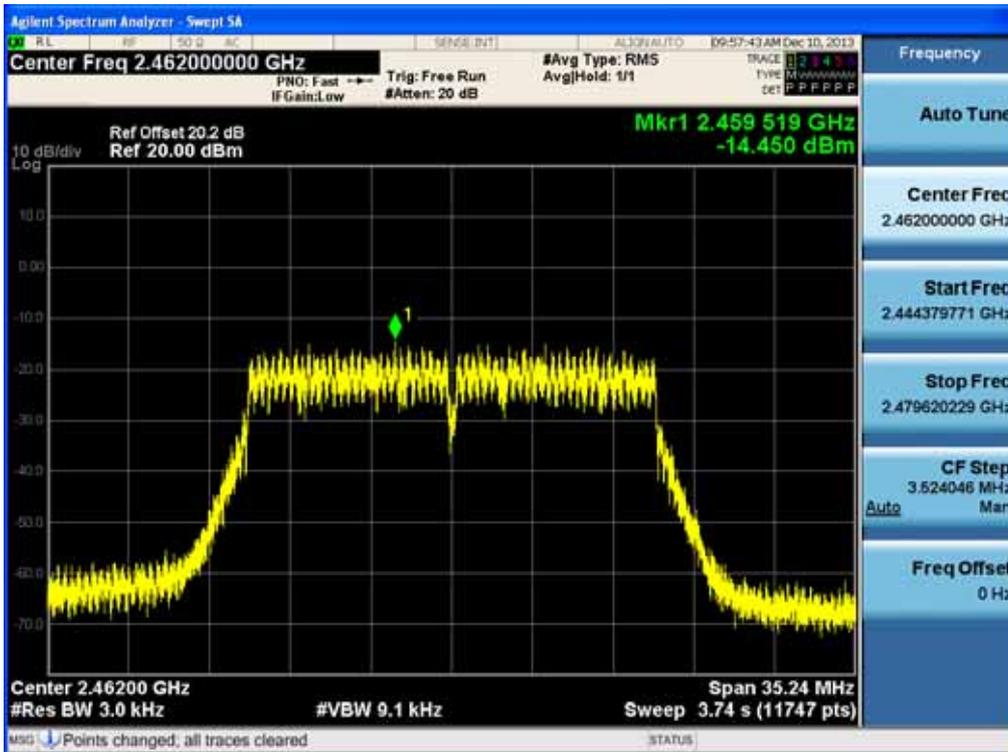


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNFD956




5.8 GHz Band
20 MHz BW

Power Spectral Density (802.11a-CH 165)

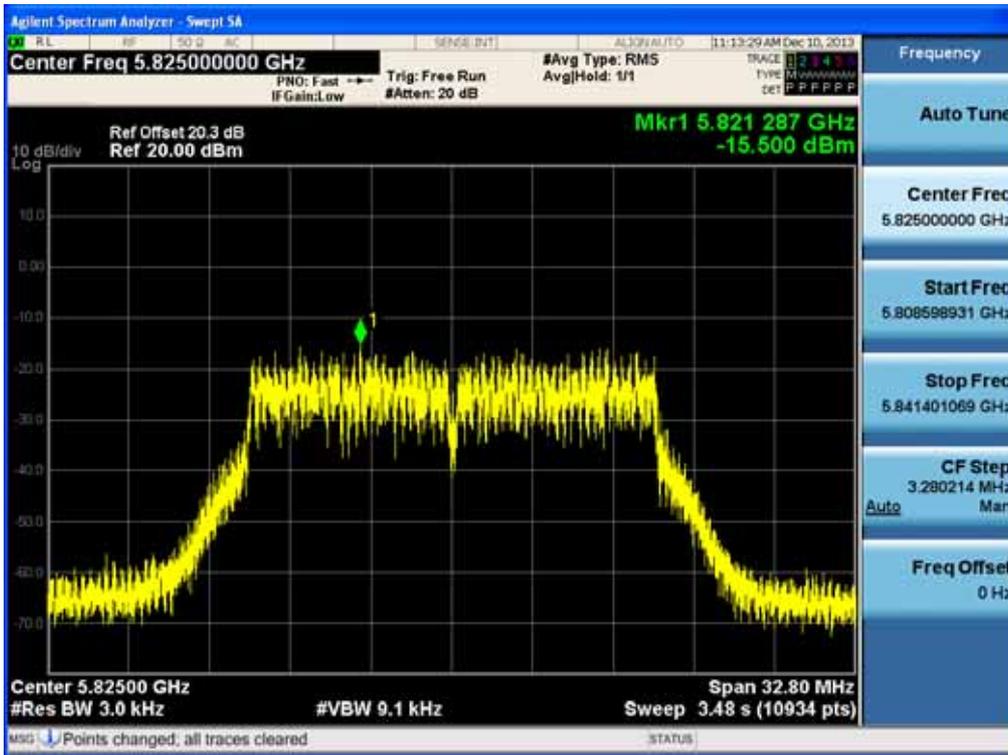


Power Spectral Density (802.11n-CH 149)

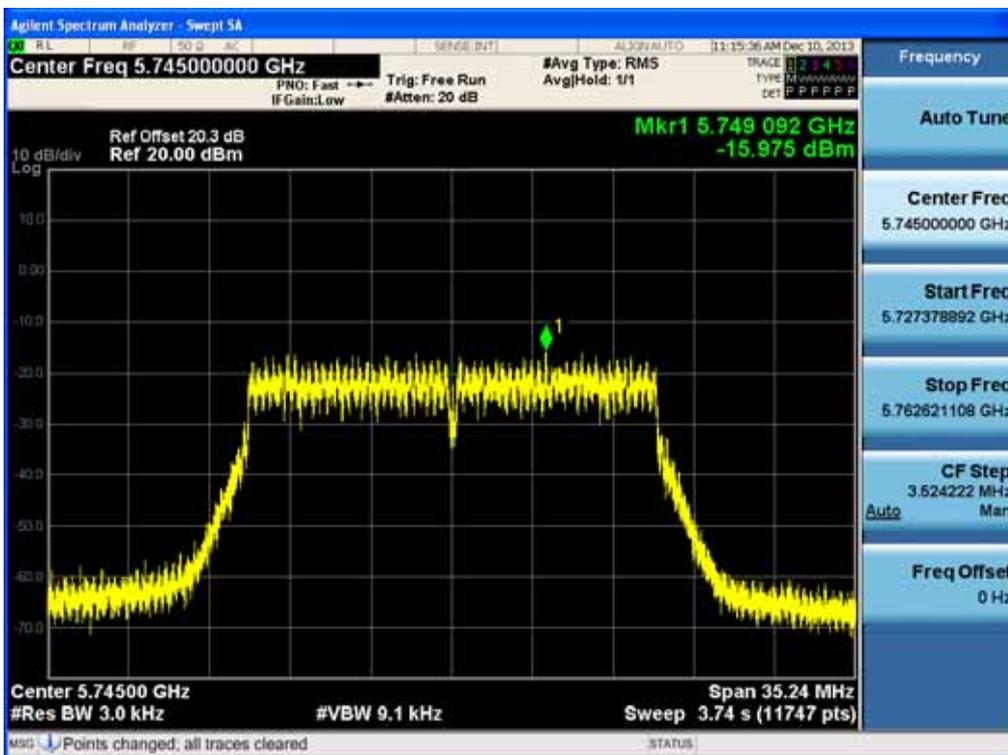


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNF956

Power Spectral Density (802.11ac_CH 149)

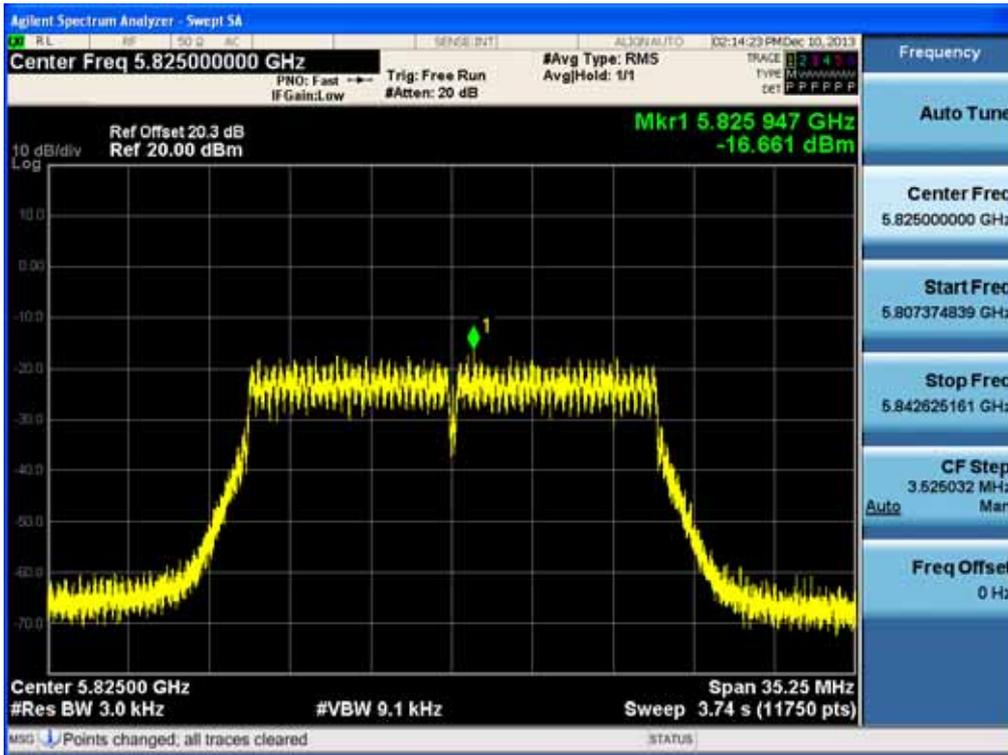

40 MHz BW


Power Spectral Density (802.11n-CH 151)

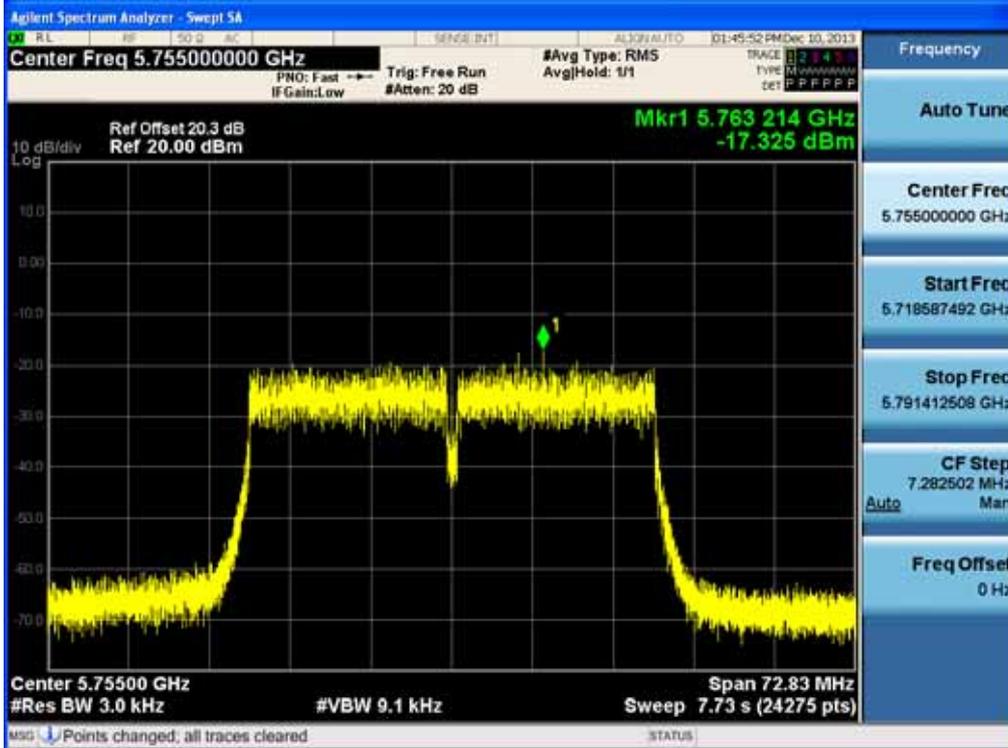

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNF0956




Power Spectral Density (802.11ac_CH 151)

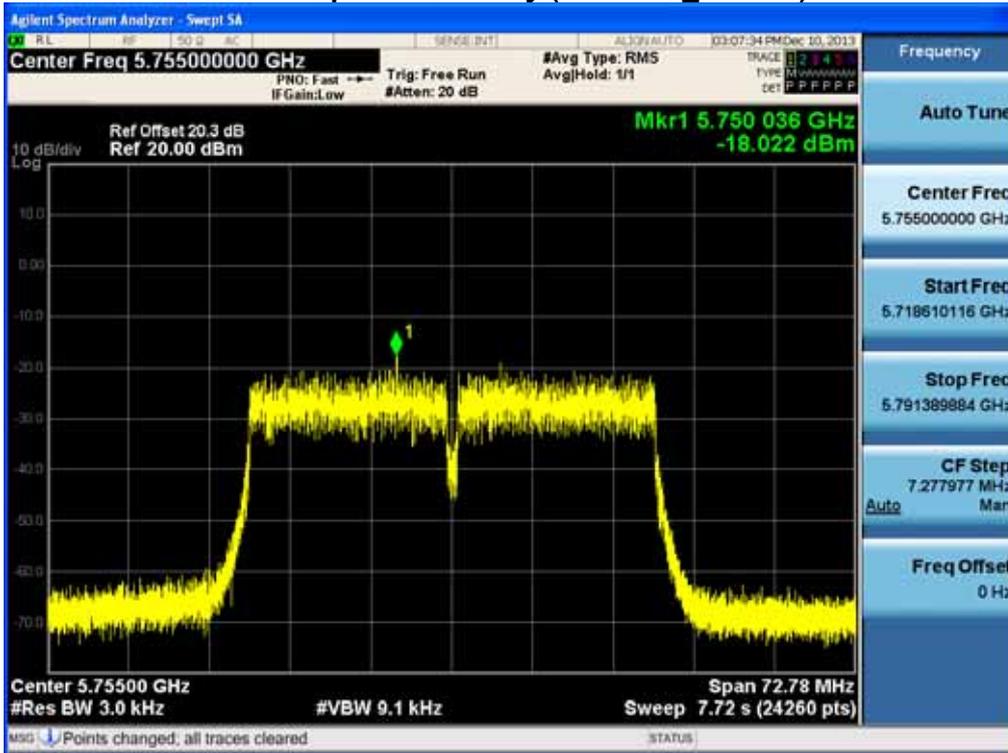

80 MHz BW

Power Spectral Density (802.11ac_CH 155)

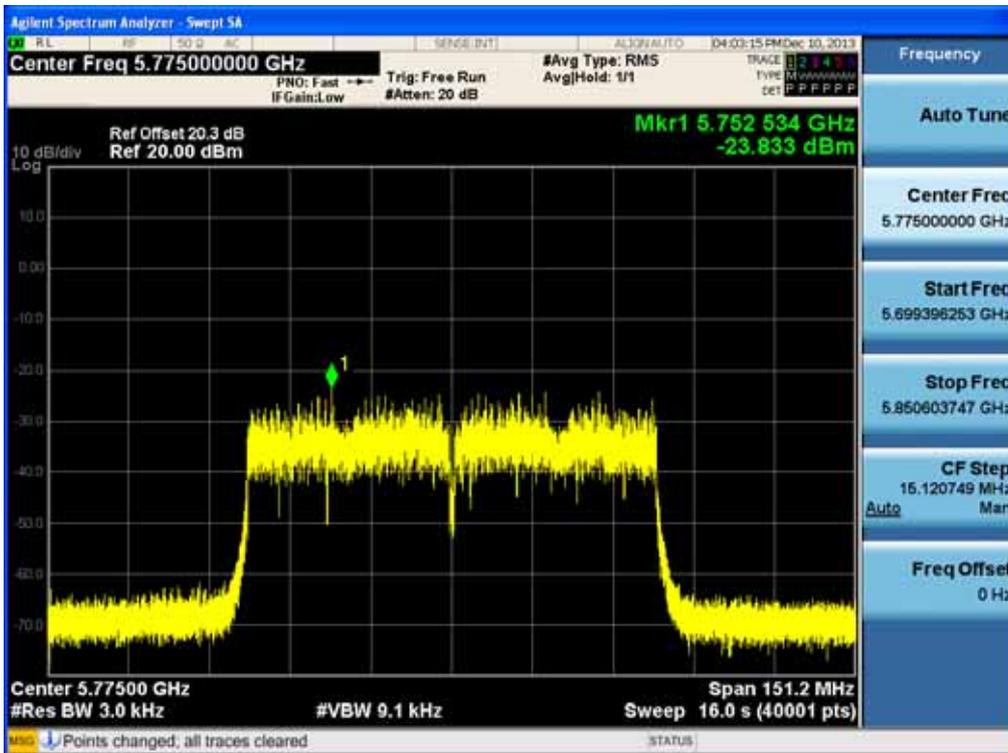

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNF0956


8.5 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

Test Requirements and limit, §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit : 20 dBc

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. (Procedure 11.0 in KDB 558074, issued 04/09/2013)

RBW = 100 kHz

VBW $\geq 3 \times$ RBW

Set span to encompass the spectrum to be examined

Detector = Peak

Trace Mode = max hold

Sweep time = auto couple

Ensure that the number of measurement points $\geq 2 \times$ Span/RBW

Allow trace to fully stabilize.

Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 10th harmonic range with the transmitter set to the lowest, middle, and highest channels.

Note :

1. The band edge results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz and 5.8 GHz range that was rounded off to the closest tenth dB. So,

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID		FCC ID: ZNFD956



10.2 dB is offset for 2.4 GHz Band and 10.3 dB is offset for 5.8 GHz Band.

Actual value of loss for the attenuator and cable combination is below table.

Band	Frequency(MHz)	Loss(dB)
2.4 GHz	2412	10.21
	2437	10.24
	2462	10.24
5.8 GHz	5745	10.31
	5755	10.30
	5785	10.29
	5795	10.26
	5825	10.28

(Actual value of loss for the attenuator and cable combination)

- 4. In case of conducted spurious emissions test, please check factors below table.
- 5. In order to simplify the report, attached plots were only the worst case channel and data rate.

FACTORS FOR FREQUENCY

Freq(MHz)	Factor(dB)
30	9.95
100	10.01
200	10.03
300	10.04
400	10.05
500	10.04
600	10.03
700	10.09
800	10.10
900	10.08
1000	10.11
2000	10.25
2400*	10.19
2500*	10.26
3000	10.27
4000	10.22
5000	10.48
5700*	10.42
5800*	10.48
6000	10.48


7000	10.57
8000	10.45
9000	10.50
10000	10.64
11000	10.69
12000	10.75
13000	10.92
14000	11.90
15000	11.00
16000	11.03
17000	10.93
18000	10.96
19000	10.85
20000	12.11
21000	11.17
22000	10.99
23000	11.12
24000	11.10
25000	11.42
26000	11.28
27000	10.83
28000	11.03
29000	10.99
30000	12.08
31000	10.99
32000	11.32
33000	11.33
34000	12.62
35000	14.85
36000	14.78
37000	15.73
38000	15.81
39000	13.47
40000	14.89

Note : 1. ** is fundamental frequency range.
 2. Factor = Cable loss + Attenuator loss


RESULT PLOTS

2.4 GHz Band

BandEdge (802.11b-CH1)

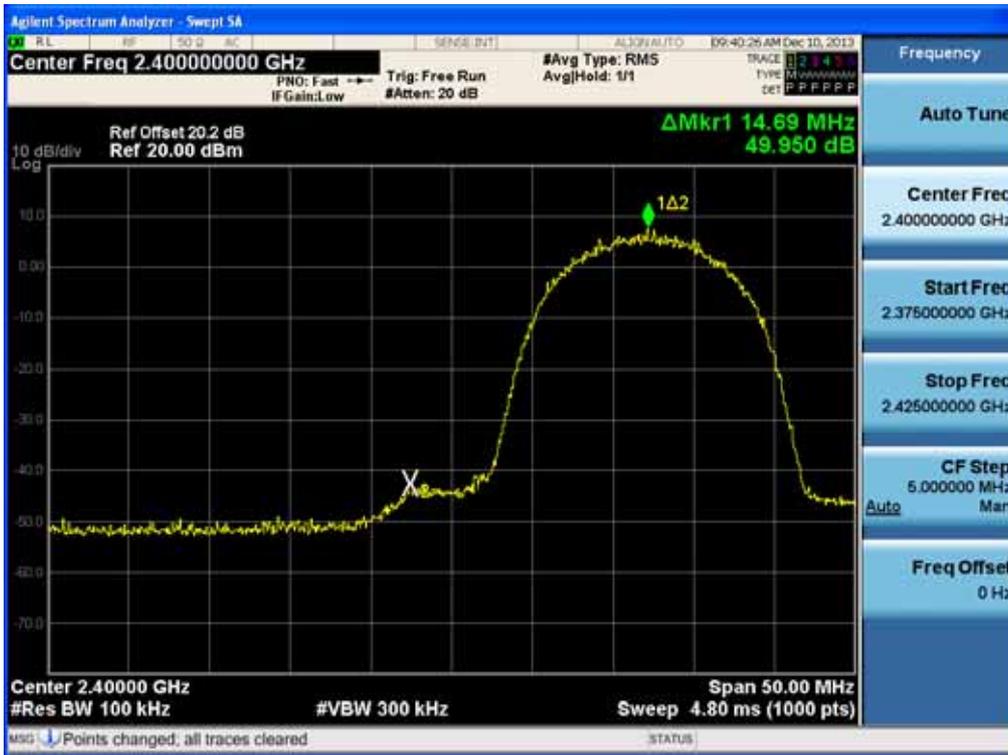


BandEdge (802.11b-CH11)

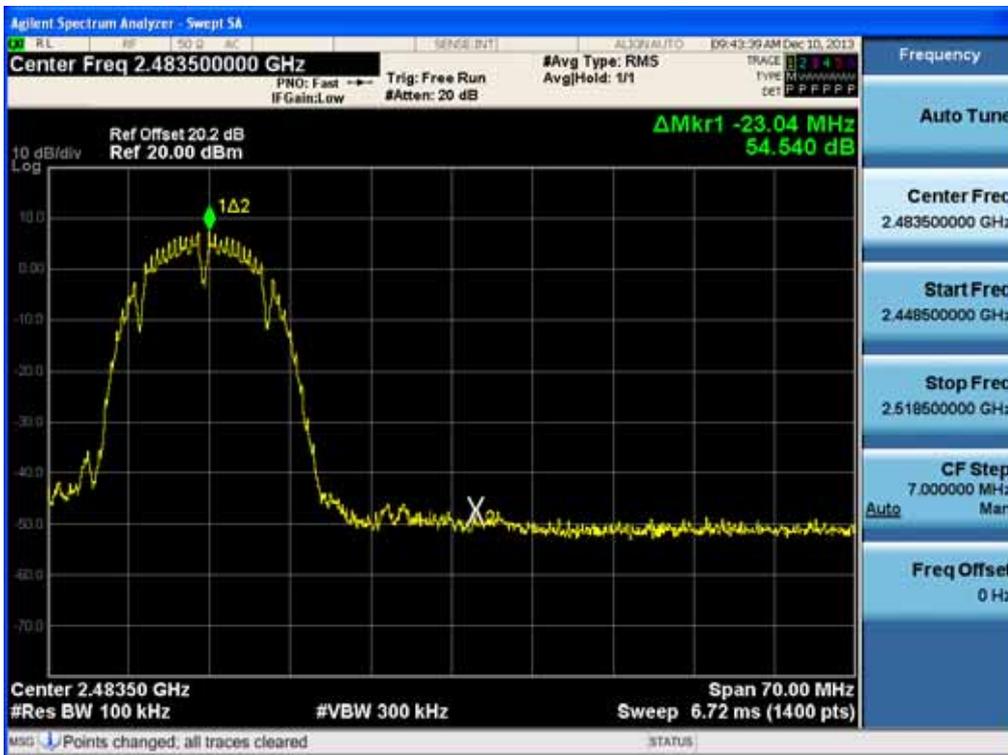


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNF956

BandEdge (802.11g-CH1)

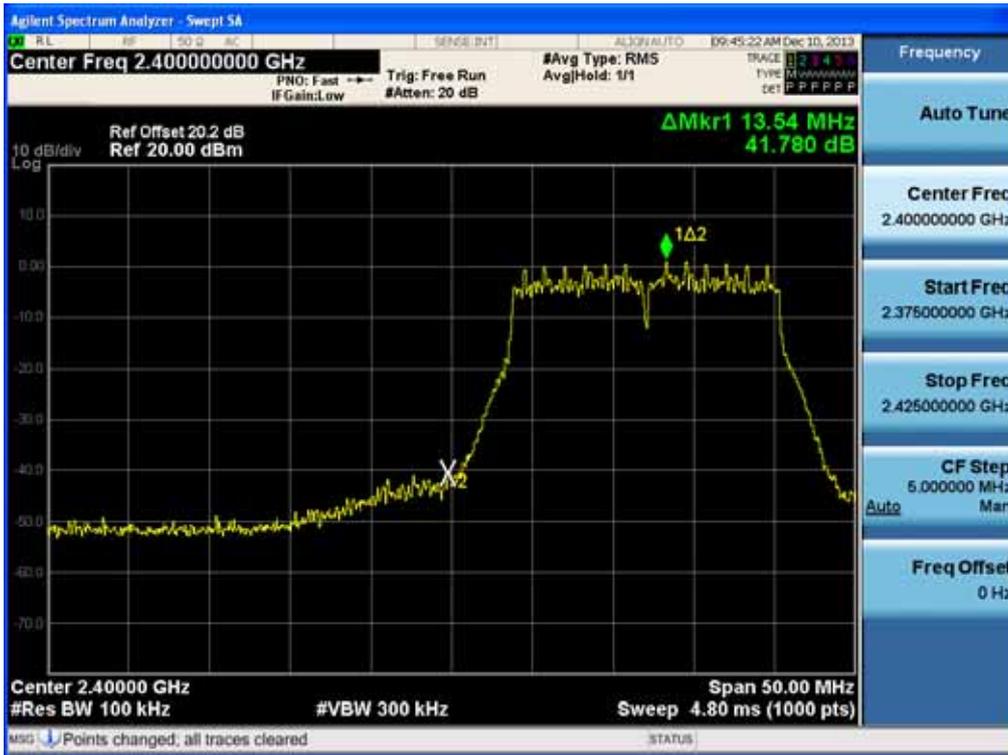


BandEdge (802.11g-CH11)

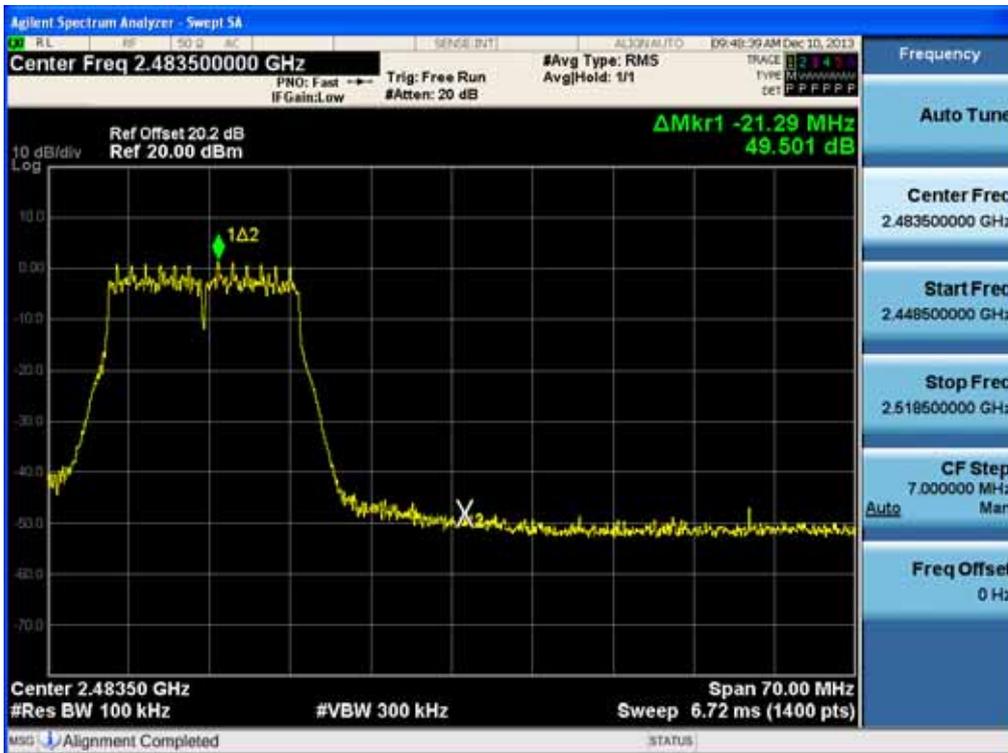

BandEdge (802.11n-CH1)



BandEdge (802.11n-CH11)

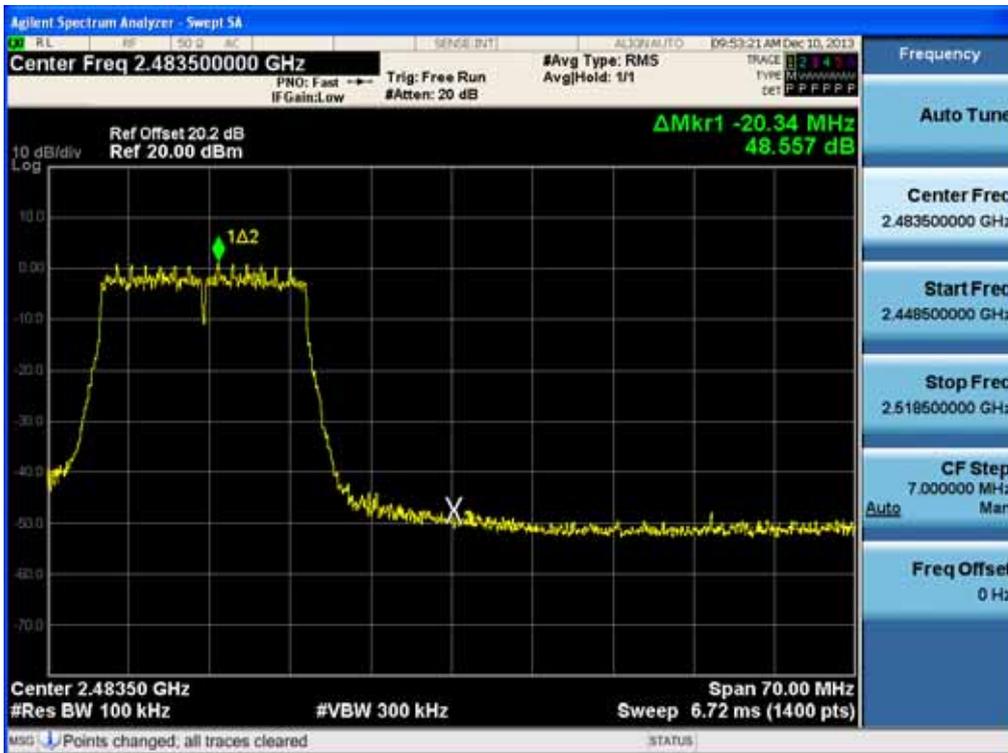


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNF0956

BandEdge (802.11ac-CH1)



BandEdge (802.11ac-CH11)

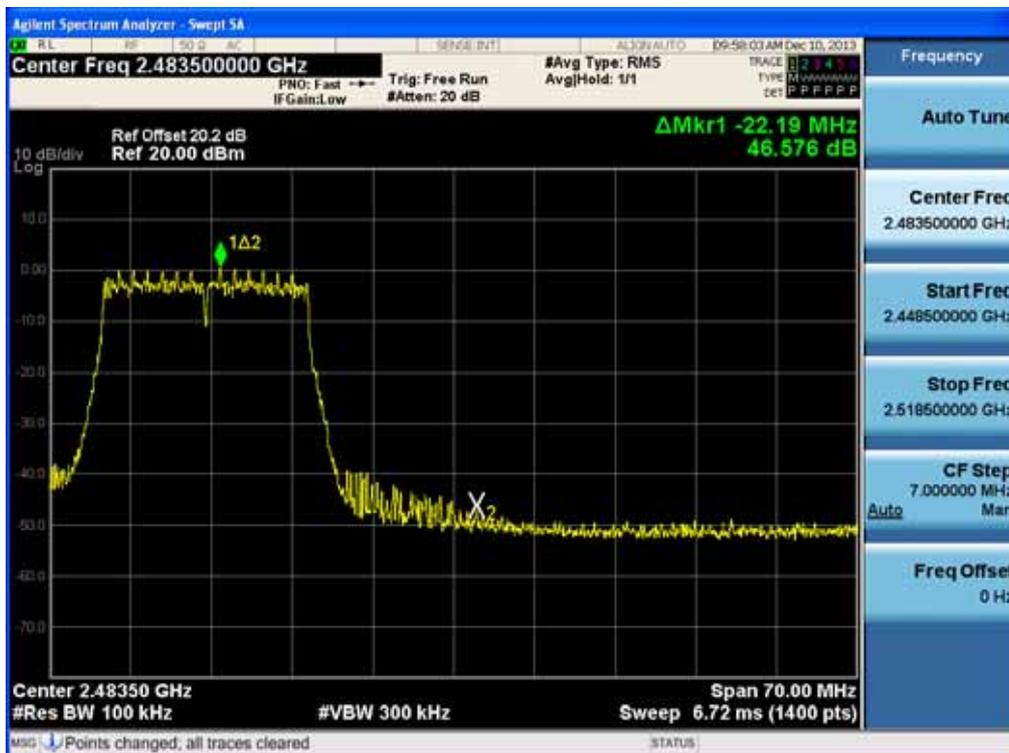


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNF0956




5.8 GHz Band

20 MHz BW

BandEdge (802.11a-CH 149)

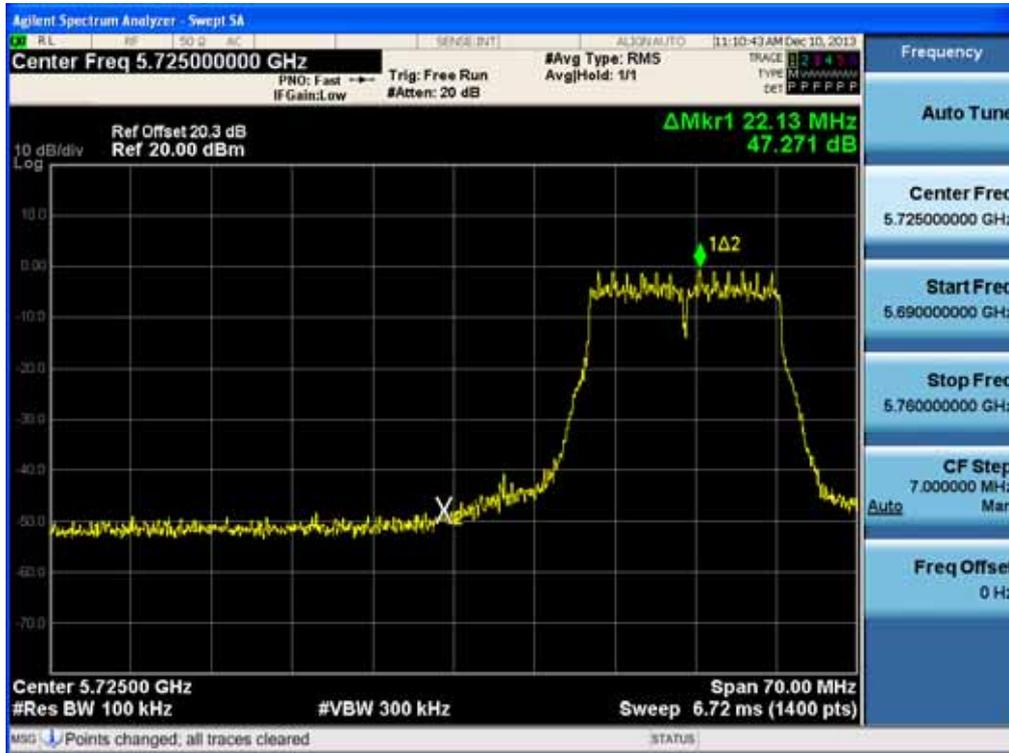


BandEdge (802.11a-CH 165)

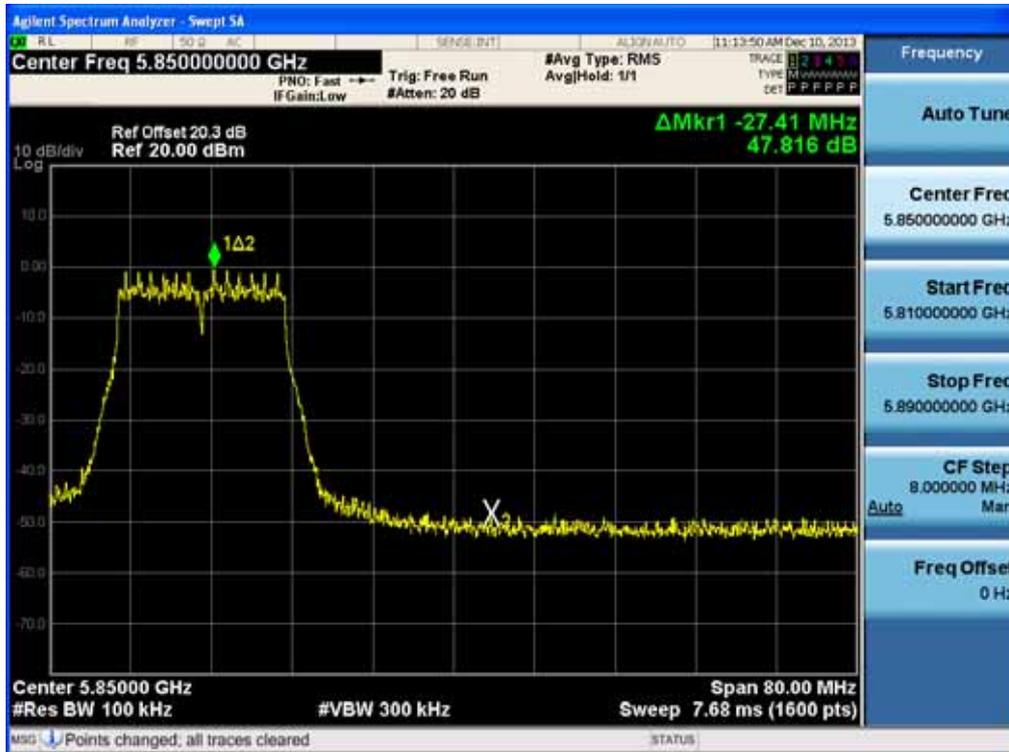


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNFD956


BandEdge (802.11n-CH 149)

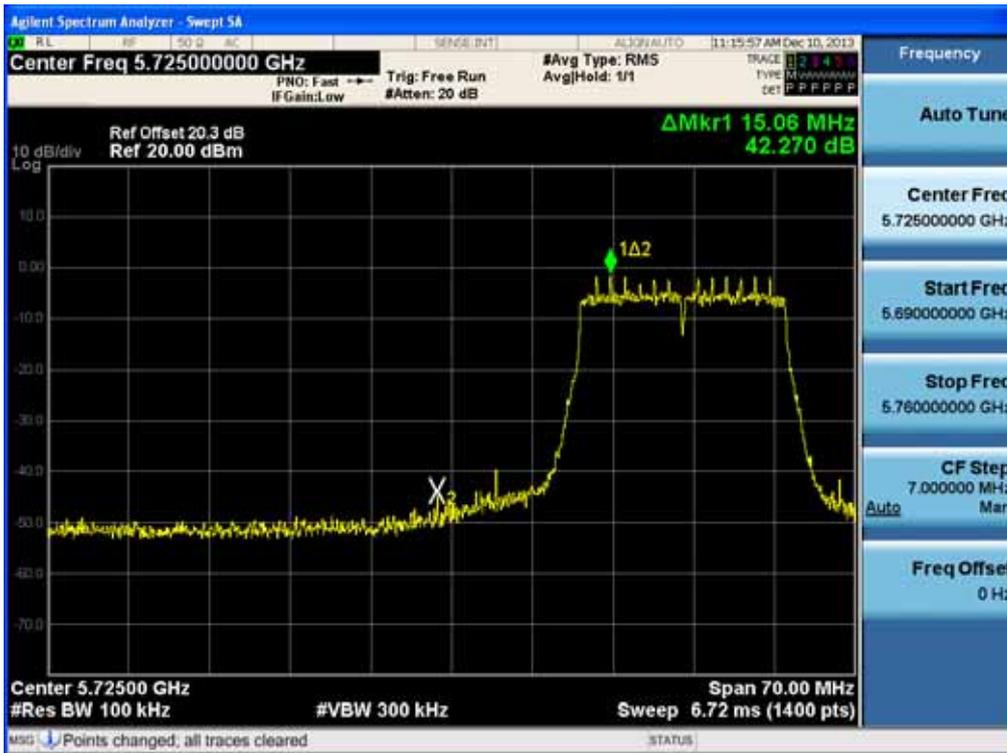

BandEdge (802.11n-CH 165)

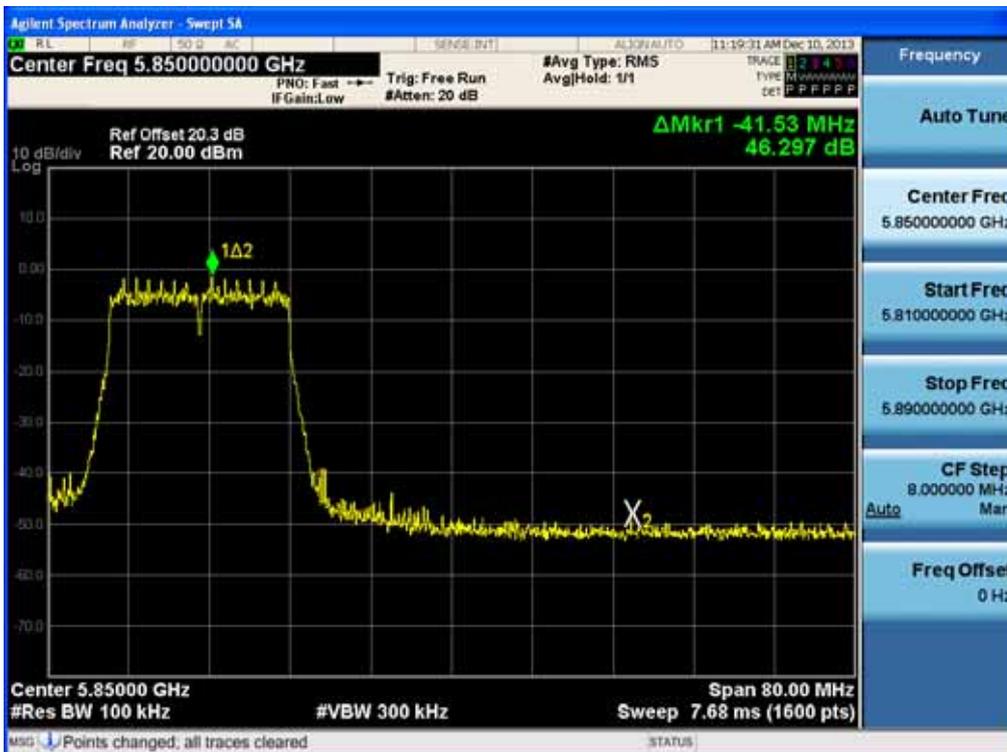


BandEdge (802.11ac-CH 149)

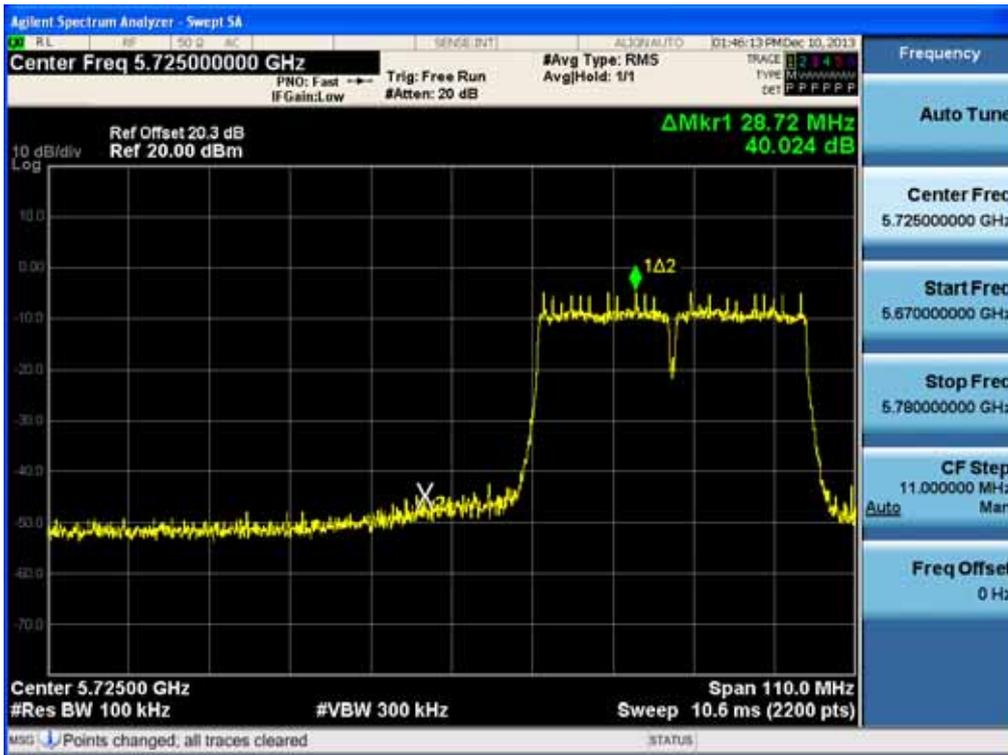

BandEdge (802.11ac-CH 165)



BandEdge (802.11n-CH 151)

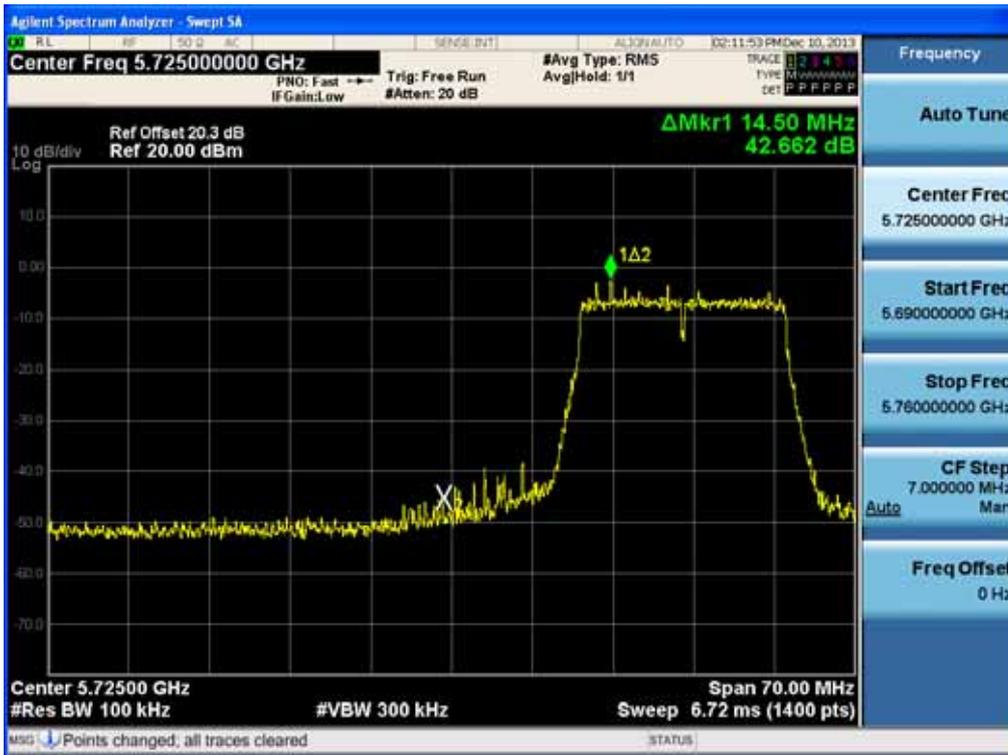


BandEdge (802.11n-CH 159)



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNF956


BandEdge (802.11ac-CH 151)

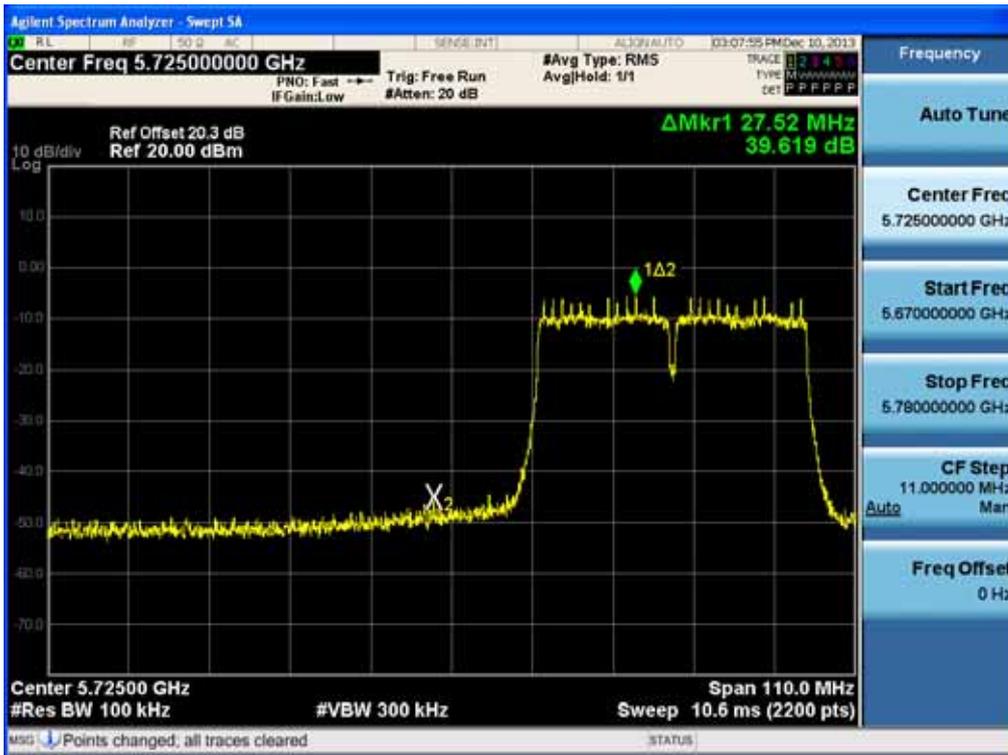


BandEdge (802.11ac-CH 159)



BandEdge (802.11ac-CH 155)

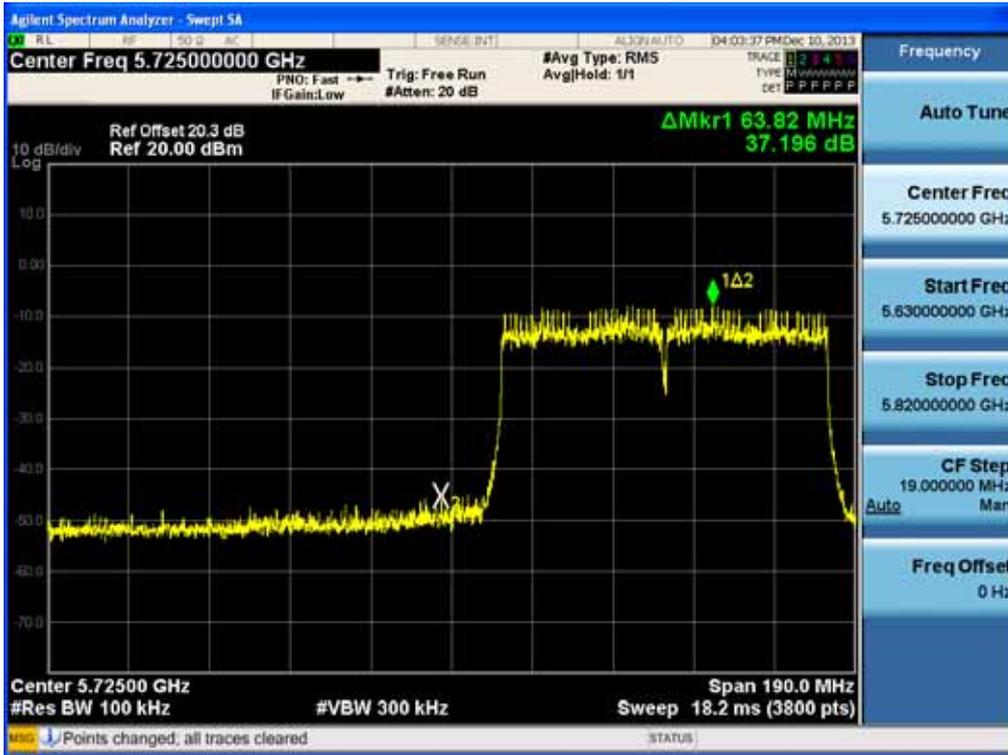

BandEdge (802.11ac-CH 155)

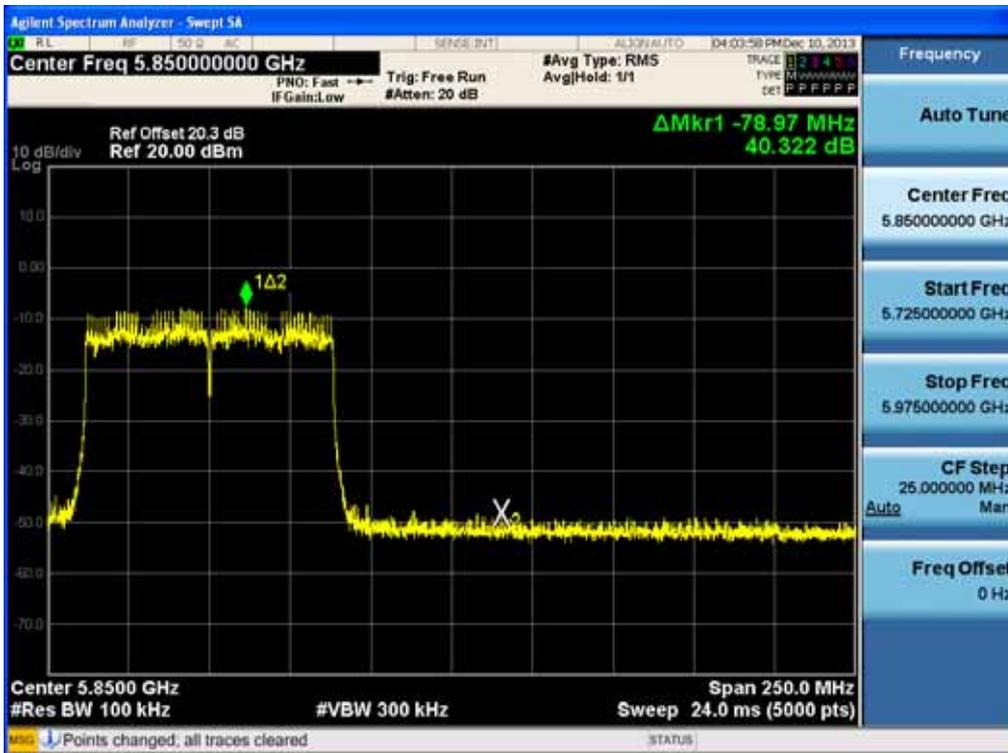


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNF956

2.4 GHz Band


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11n_20 MHz BW-CH11)

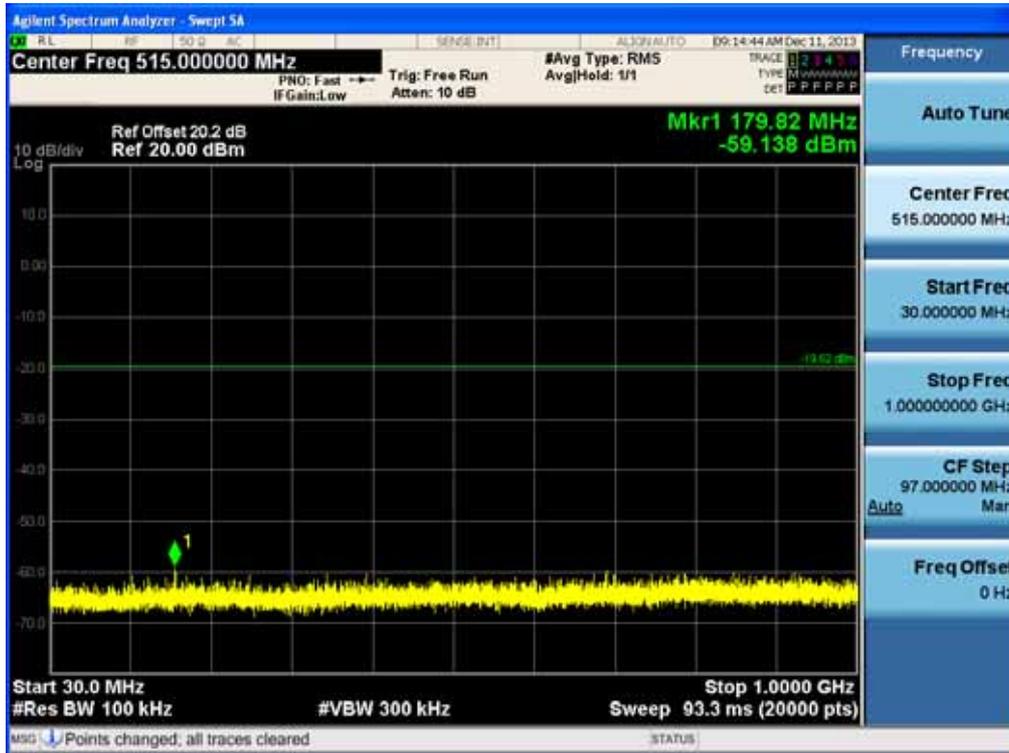

1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11n_20 MHz BW-CH11)

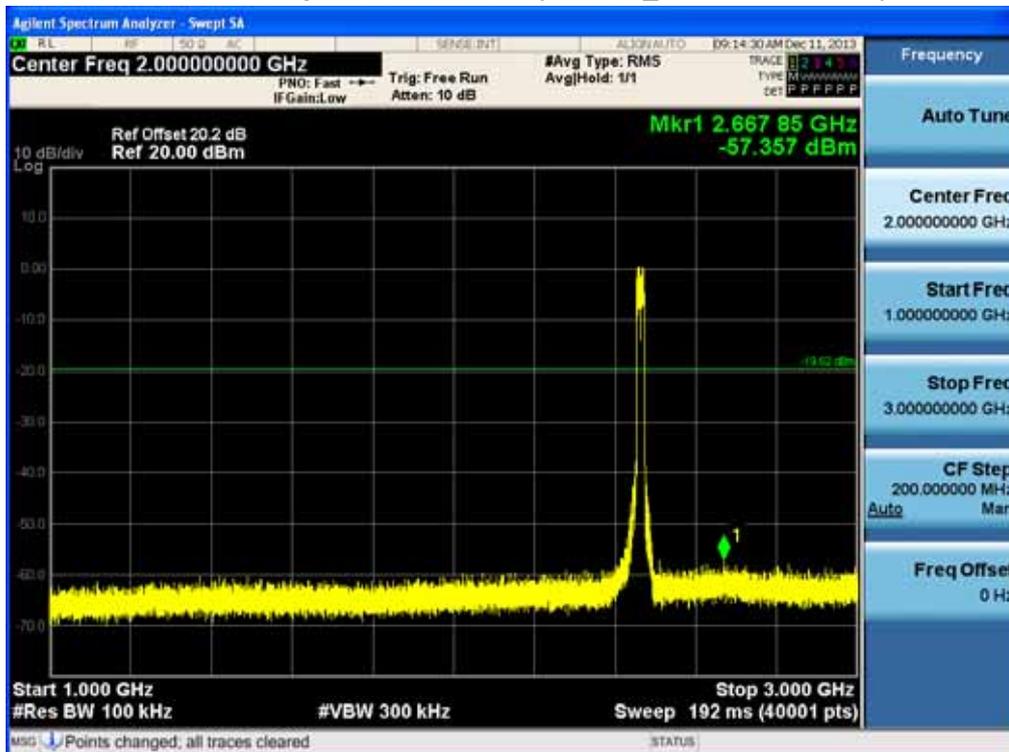


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNF956




3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11n_20 MHz BW-CH11)

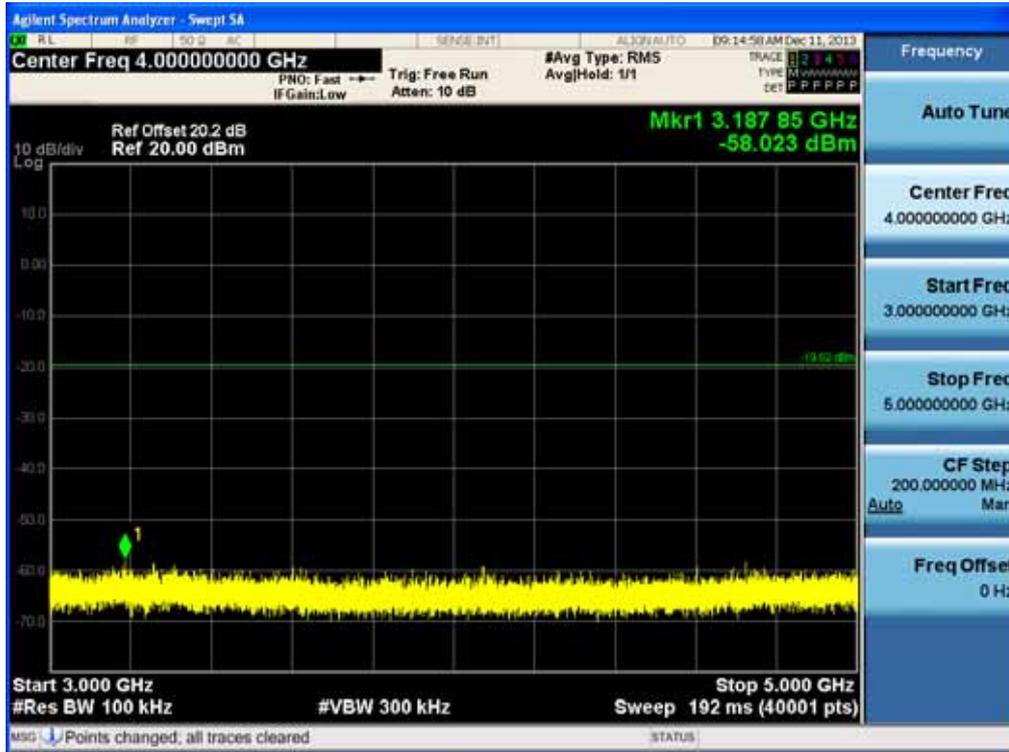

5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11n_20 MHz BW-CH11)

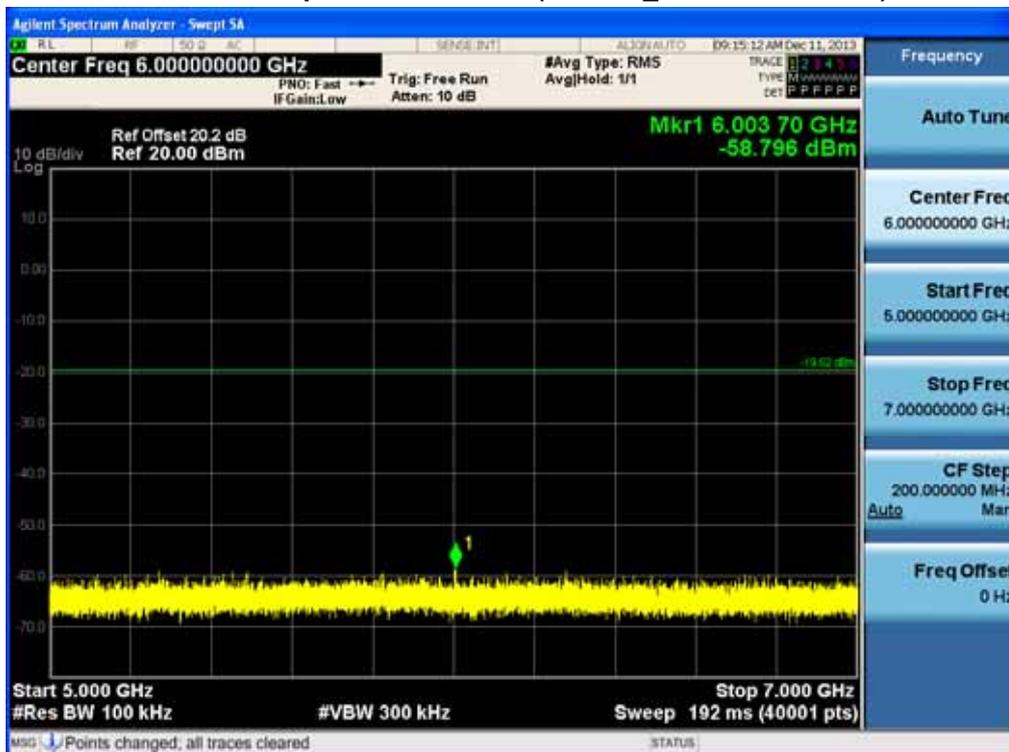


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNF956



7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11n_20 MHz BW-CH11)

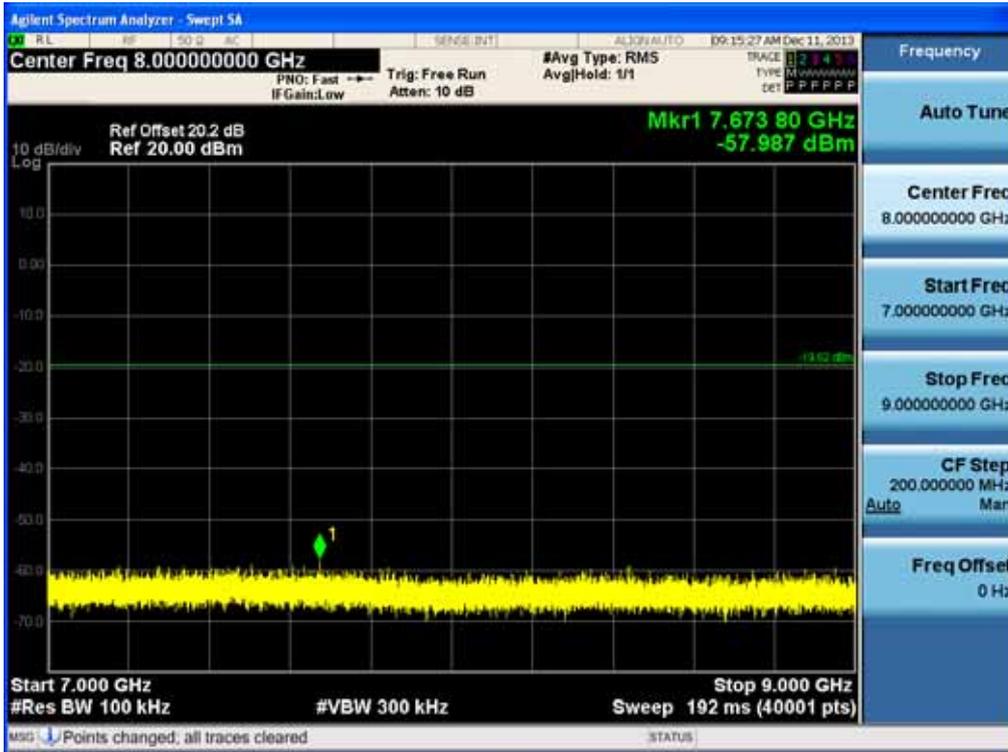

9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11n_20 MHz BW-CH11)




FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNF956




11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11n_20 MHz BW-CH11)

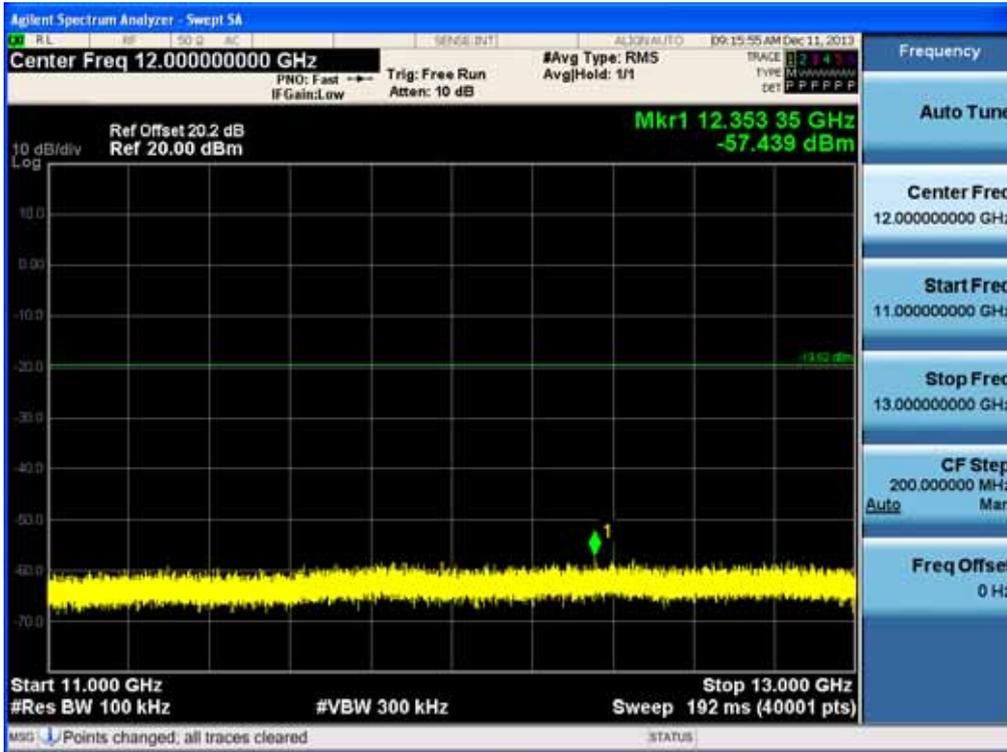

13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11n_20 MHz BW-CH11)

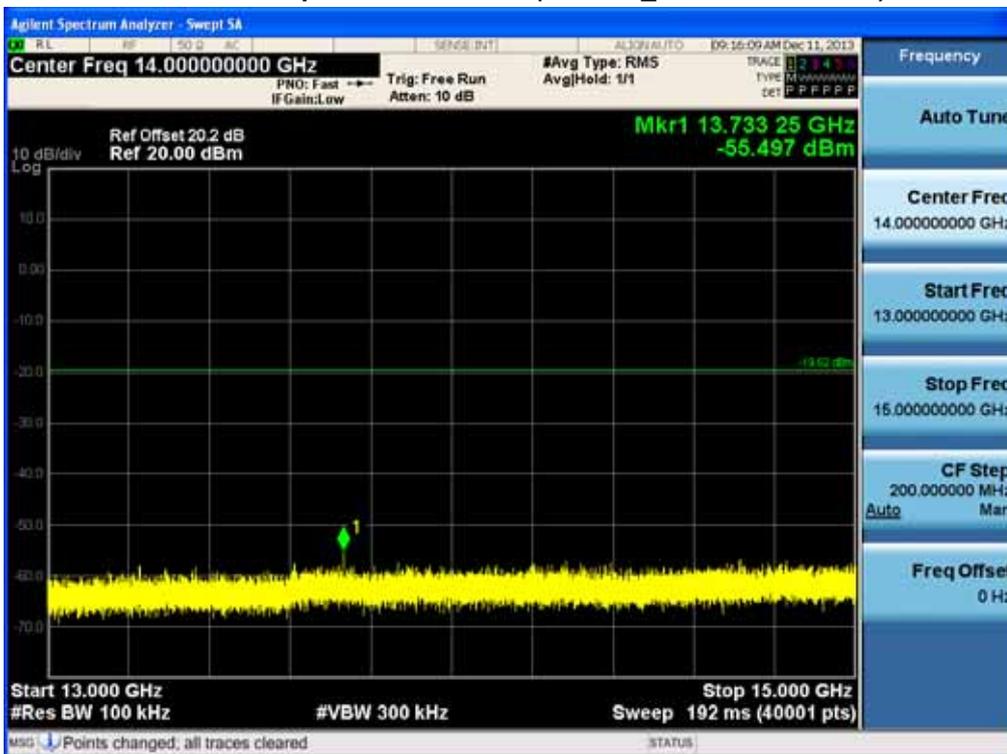


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNF0956




15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11n_20 MHz BW-CH11)

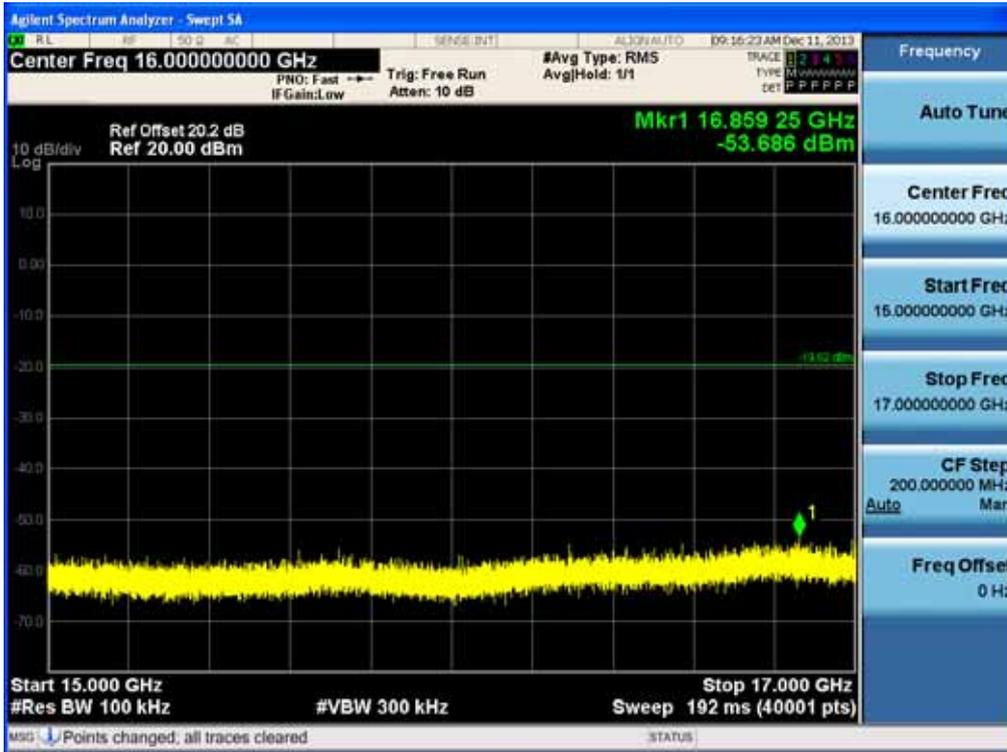

17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11n_20 MHz BW-CH11)

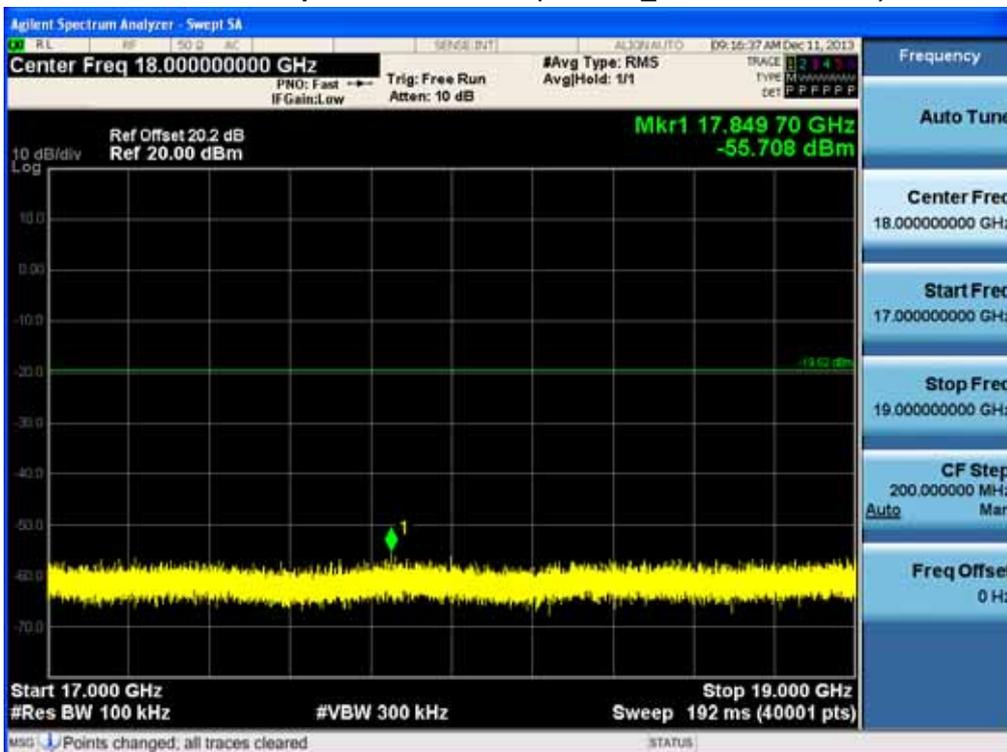


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNF956




19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11n_20 MHz BW-CH11)

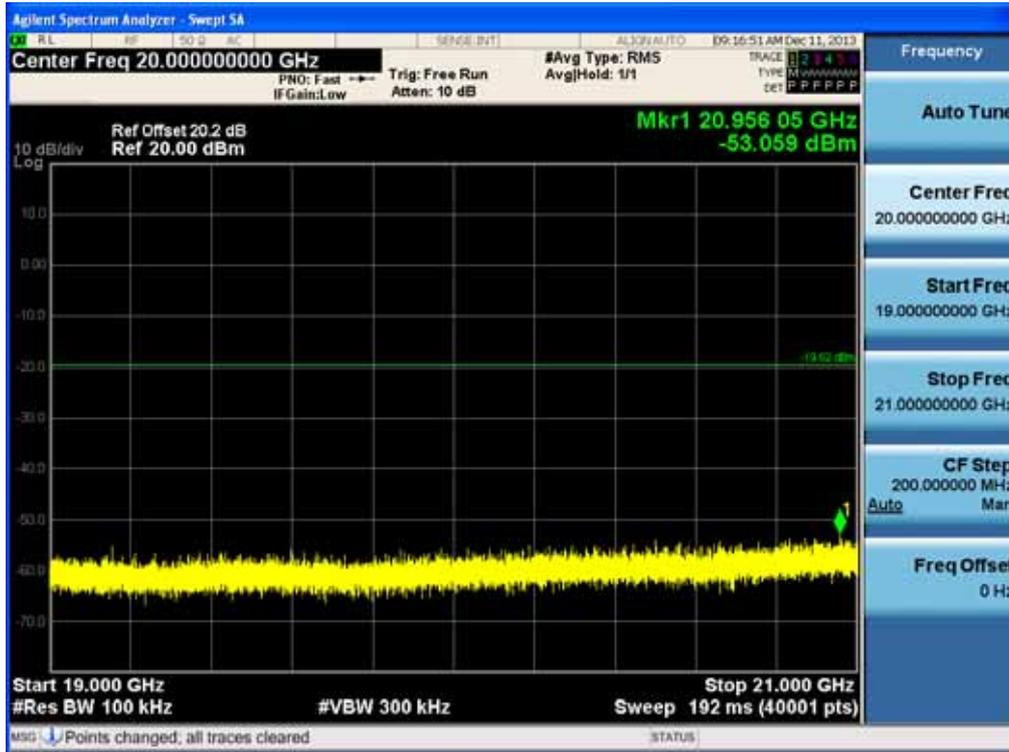


21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11n_20 MHz BW-CH11)

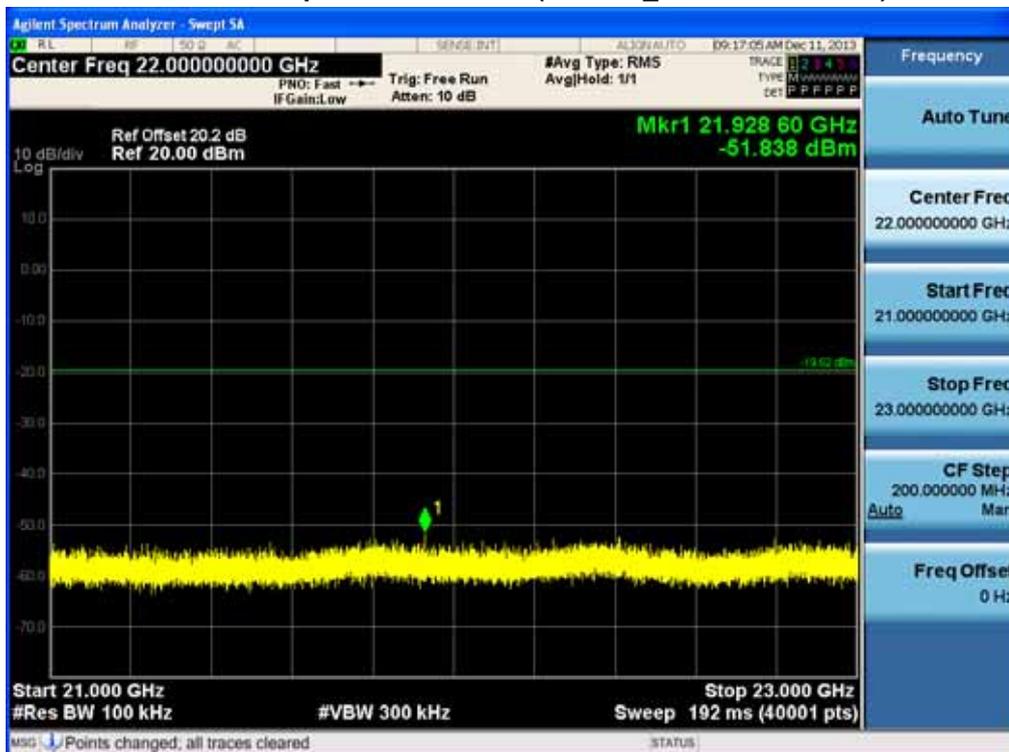

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNF956

Conducted Spurious Emission (802.11n_20 MHz BW-CH11)

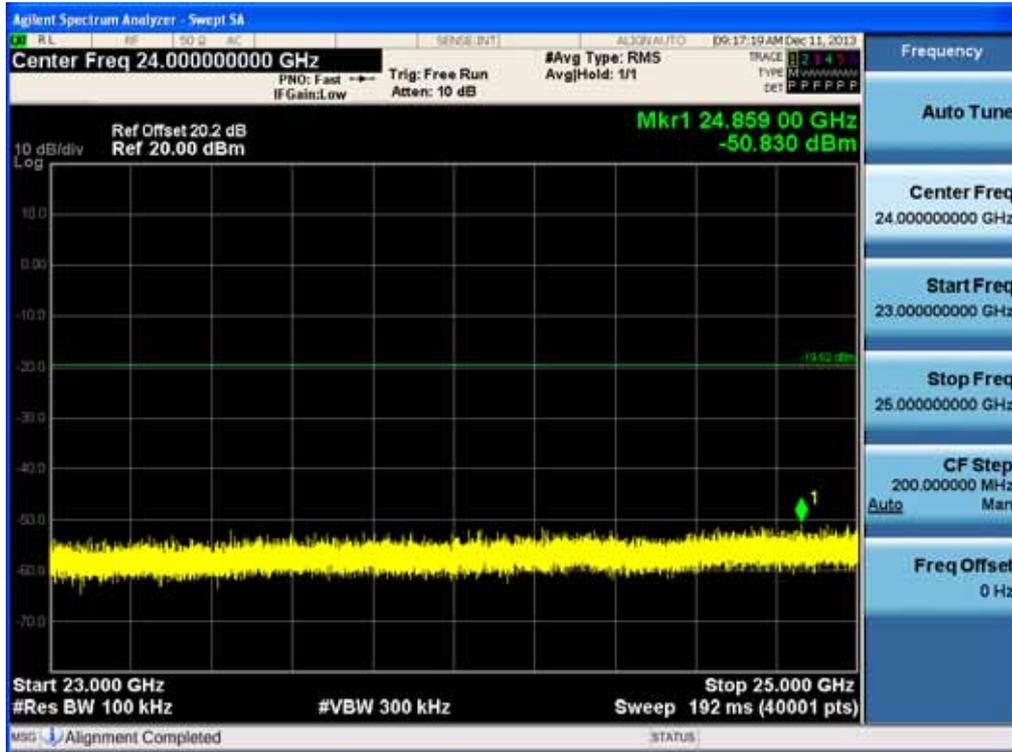


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNF956

5 GHz Band

30 MHz ~ 1.6 GHz


Conducted Spurious Emission (802.11a-CH149) _20 MHz BW

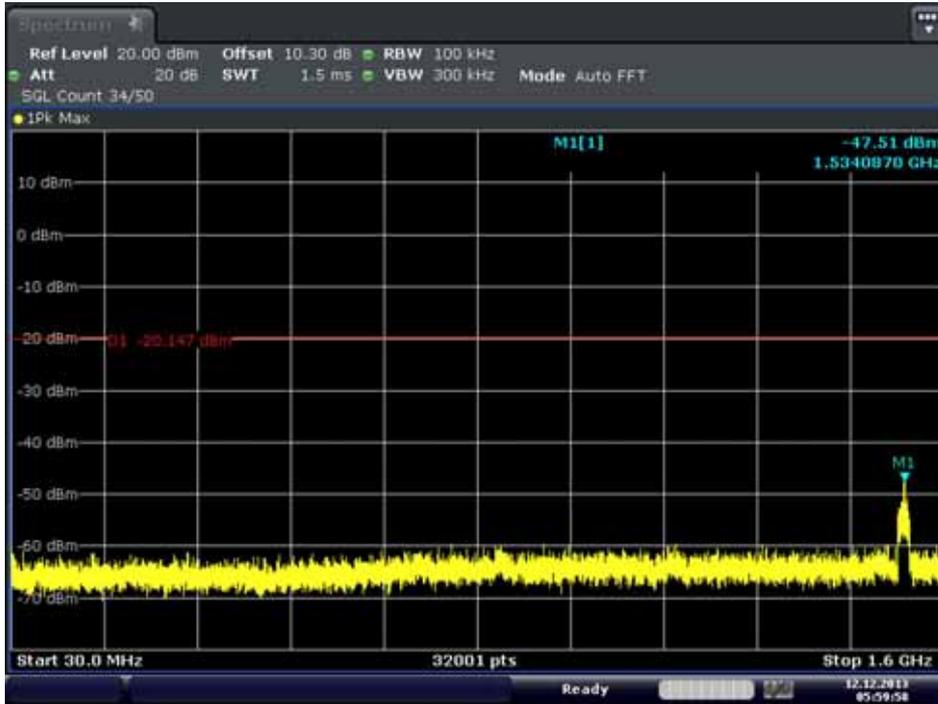

Date: 12.DEC.2013 05:59:58

1.6 GHz ~ 3.2 GHz

Conducted Spurious Emission (802.11a-CH149) _20 MHz BW

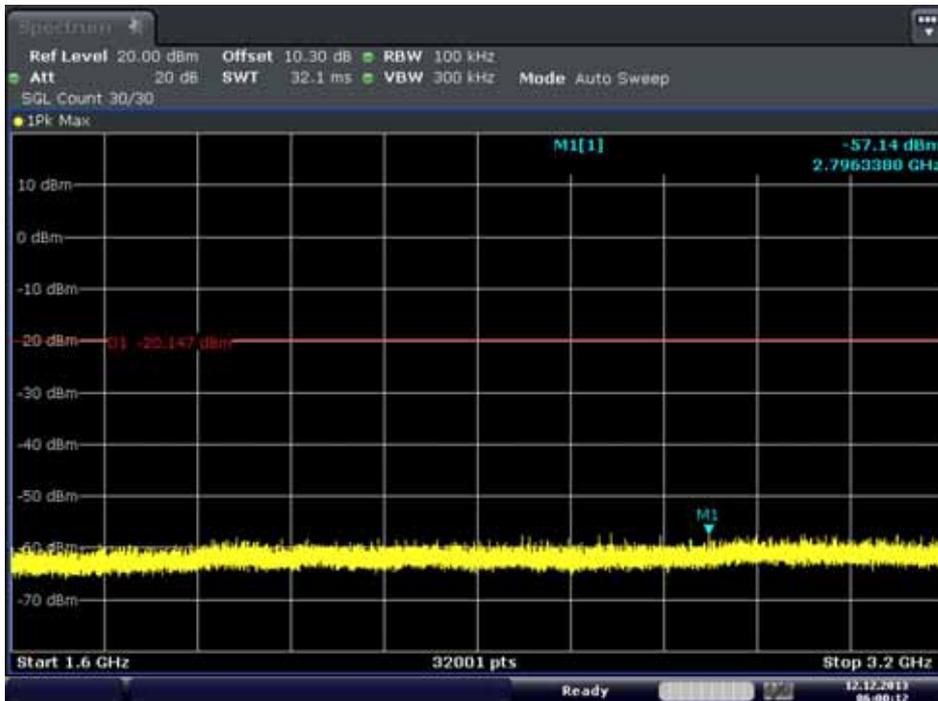


Date: 12.DEC.2013 06:00:12

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNF0956

3.2 GHz ~ 4.8 GHz


Conducted Spurious Emission (802.11a-CH149) _20 MHz BW

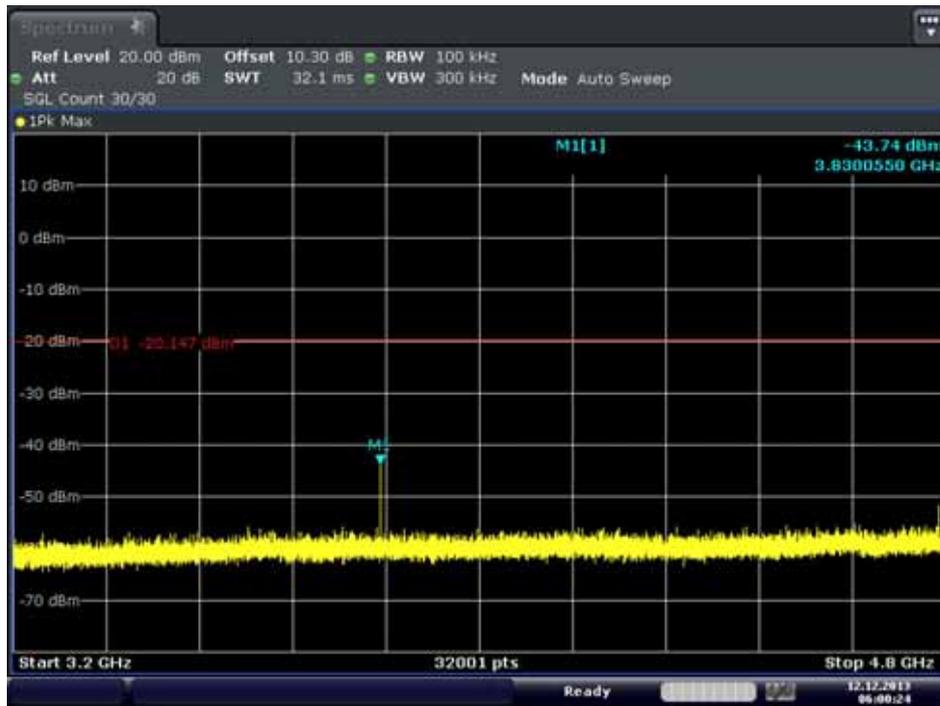

Date: 12.DEC.2013 06:00:24

4.8 GHz ~ 6.4 GHz

Conducted Spurious Emission (802.11a-CH149) _20 MHz BW

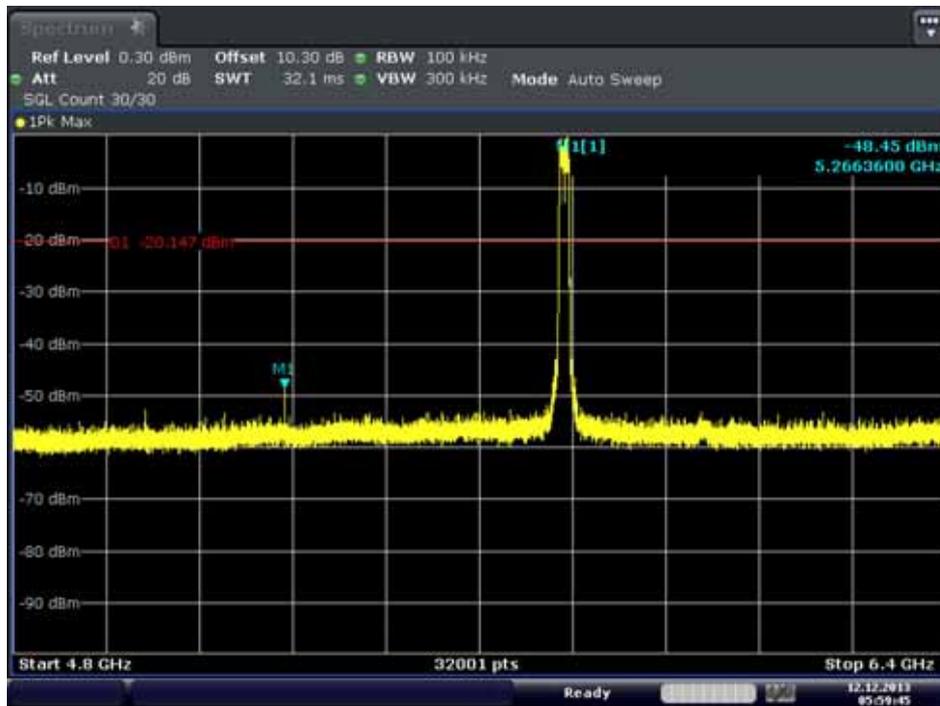


Date: 12.DEC.2013 05:59:46

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNF0956

6.4 GHz ~ 8 GHz


Conducted Spurious Emission (802.11a-CH149) _20 MHz BW

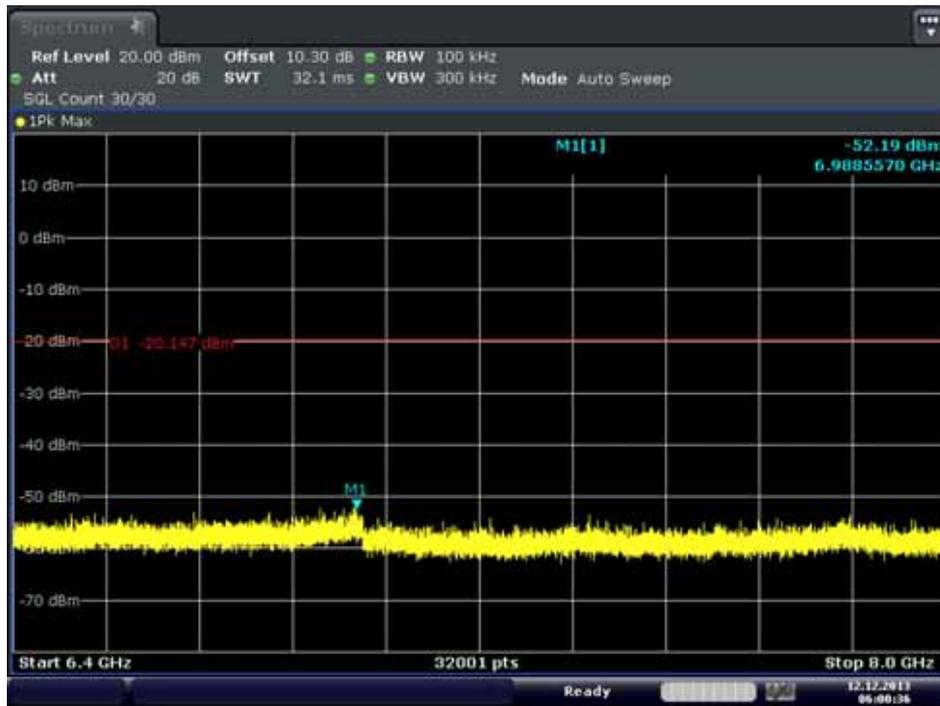

Date: 12.DEC.2013 06:00:37

8 GHz ~ 9.6 GHz

Conducted Spurious Emission (802.11a-CH149) _20 MHz BW

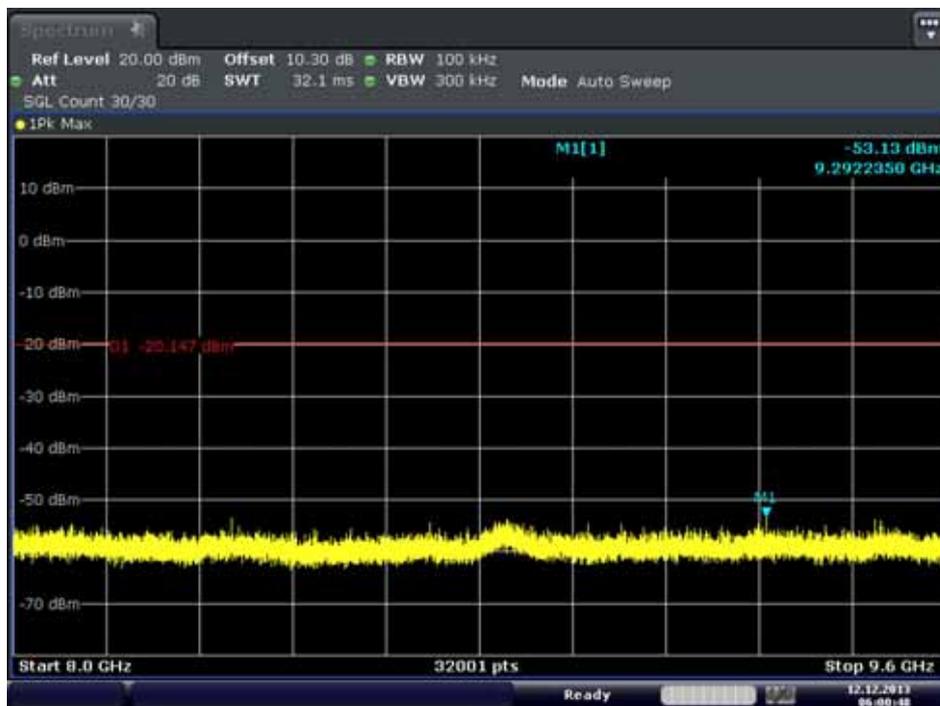


Date: 12.DEC.2013 06:00:49

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNF0956

9.6 GHz ~ 11.2 GHz


Conducted Spurious Emission (802.11a-CH149) _20 MHz BW

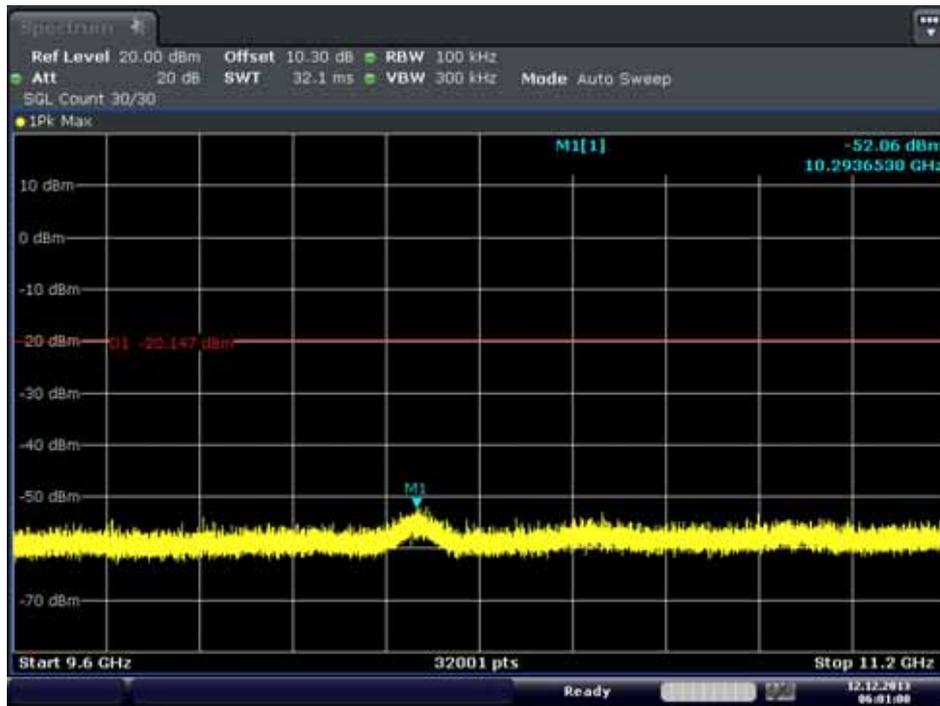

Date: 12.DEC.2013 06:01:01

11.2 GHz ~ 12.8 GHz

Conducted Spurious Emission (802.11a-CH149) _20 MHz BW

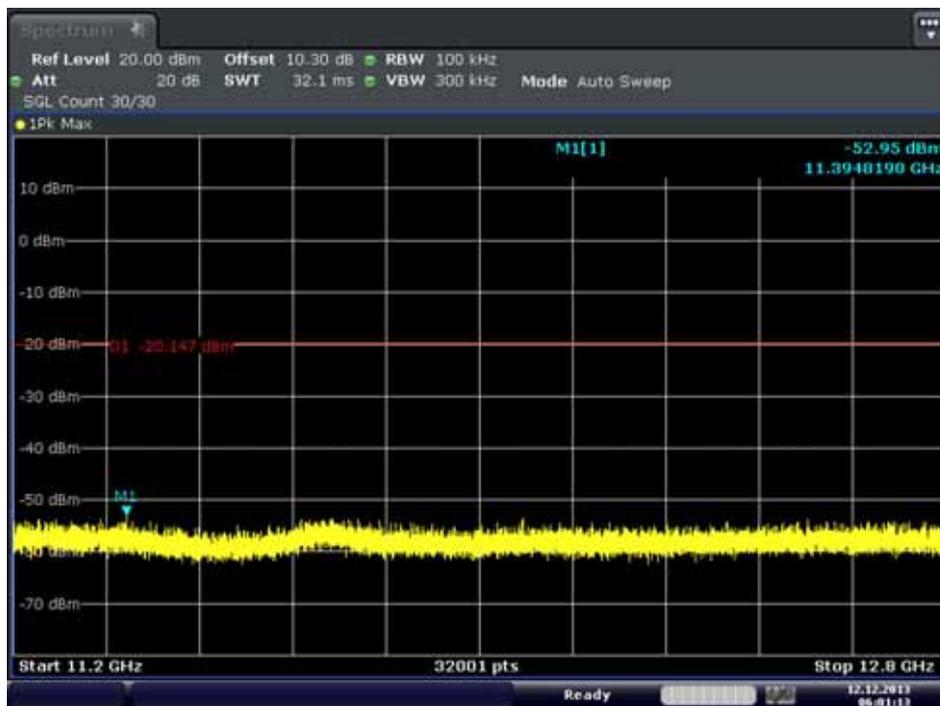


Date: 12.DEC.2013 06:01:13

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNF0956

12.8 GHz ~ 14.4 GHz


Conducted Spurious Emission (802.11a-CH149) _20 MHz BW

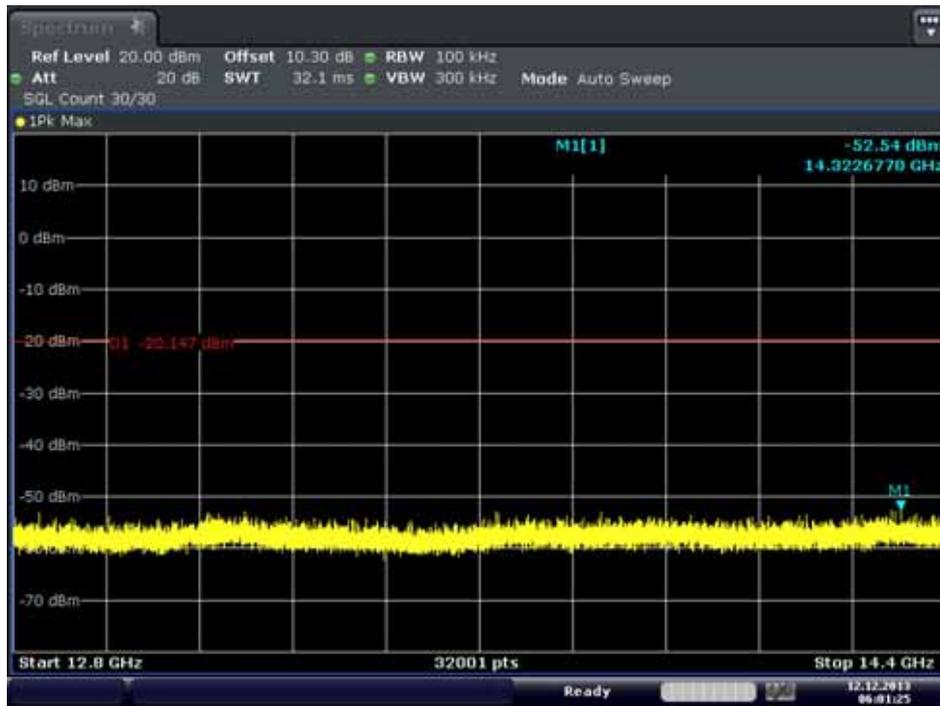

Date: 12.DEC.2013 06:01:25

14.4 GHz ~ 16 GHz

Conducted Spurious Emission (802.11a-CH149) _20 MHz BW

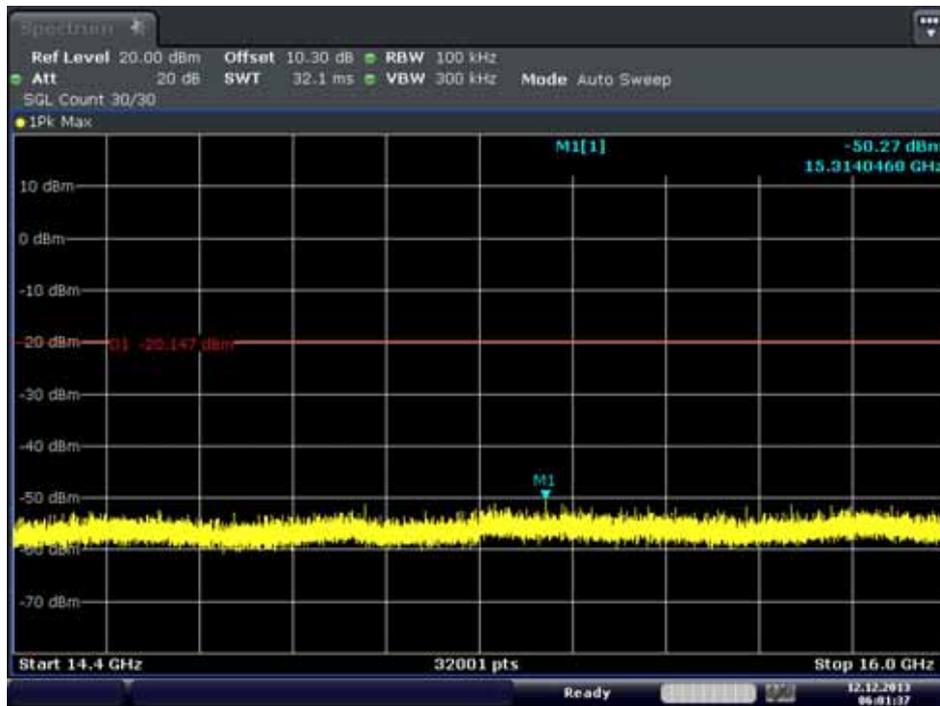


Date: 12.DEC.2013 06:01:37

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNF0956

16 GHz ~ 17.6 GHz


Conducted Spurious Emission (802.11a-CH149) _20 MHz BW

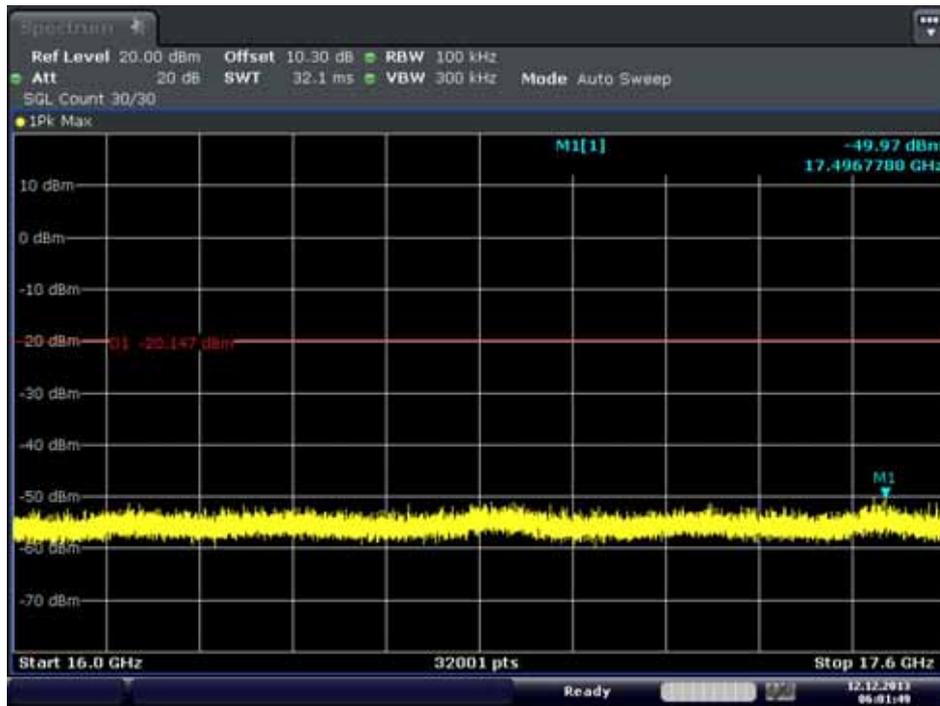

Date: 12.DEC.2013 06:01:50

17.6 GHz ~ 19.2 GHz

Conducted Spurious Emission (802.11a-CH149) _20 MHz BW

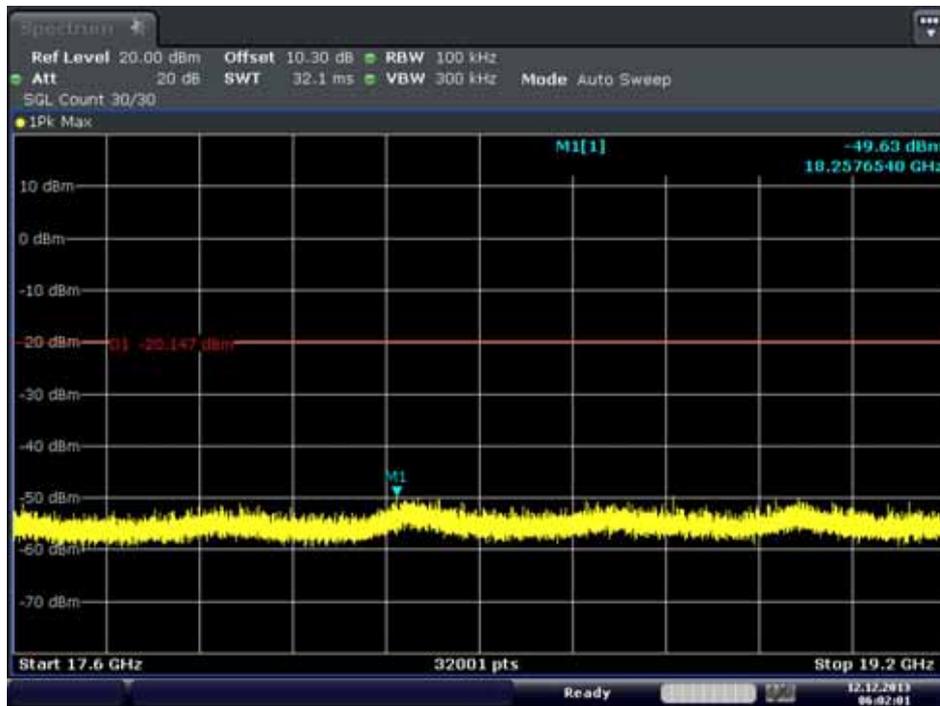


Date: 12.DEC.2013 06:02:02

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNF0956

19.2 GHz ~ 20.8 GHz


Conducted Spurious Emission (802.11a-CH149) _20 MHz BW

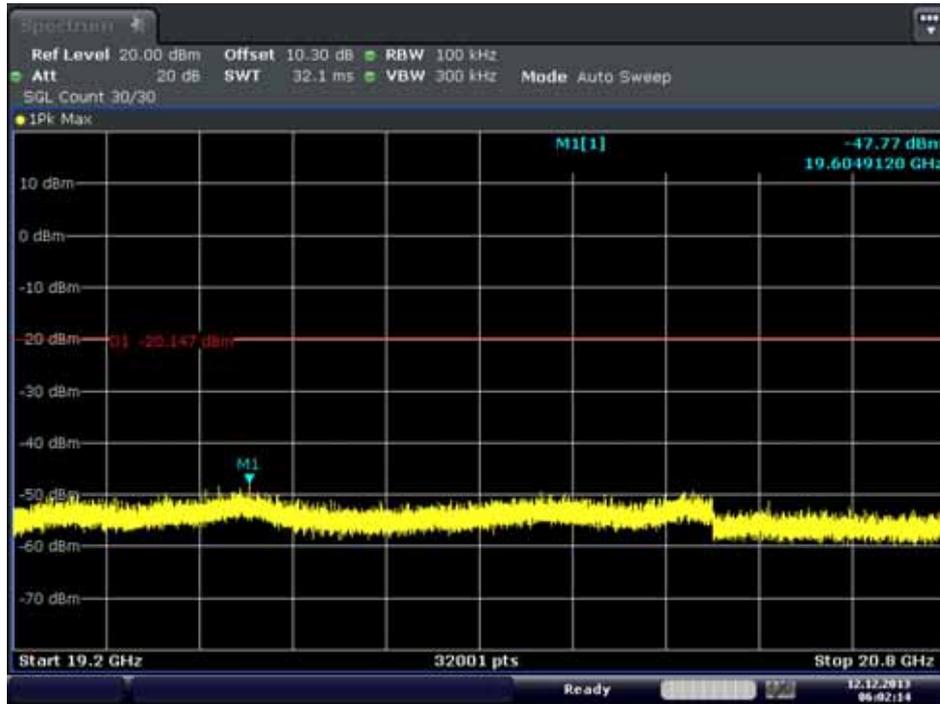

Date: 12.DEC.2013 06:02:14

20.8 GHz ~ 22.4 GHz

Conducted Spurious Emission (802.11a-CH149) _20 MHz BW

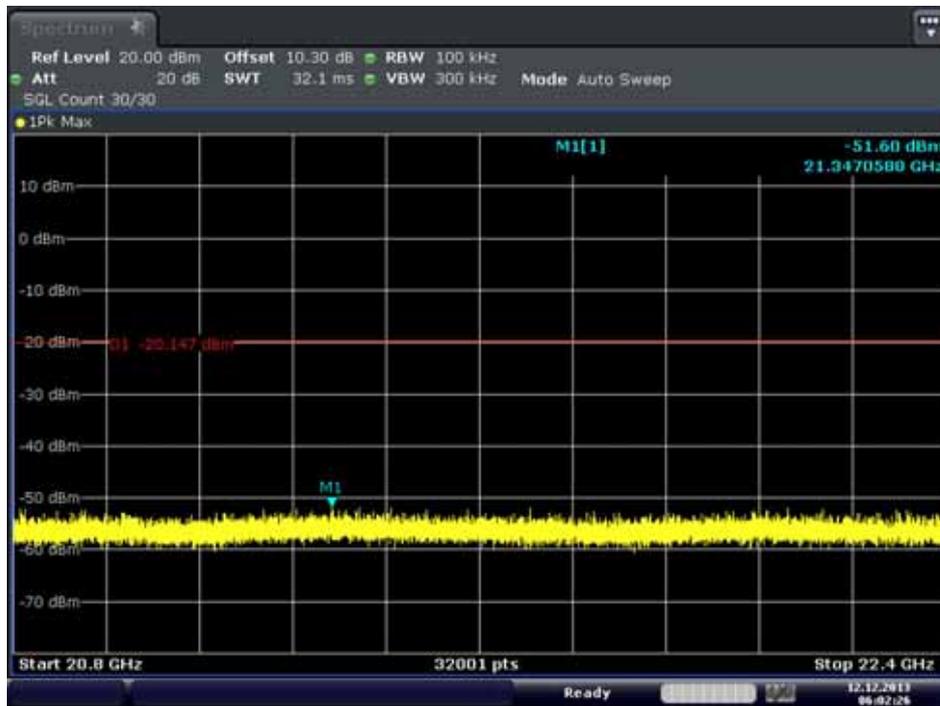


Date: 12.DEC.2013 06:02:26

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNF0956

22.4 GHz ~ 24 GHz


Conducted Spurious Emission (802.11a-CH149) _20 MHz BW

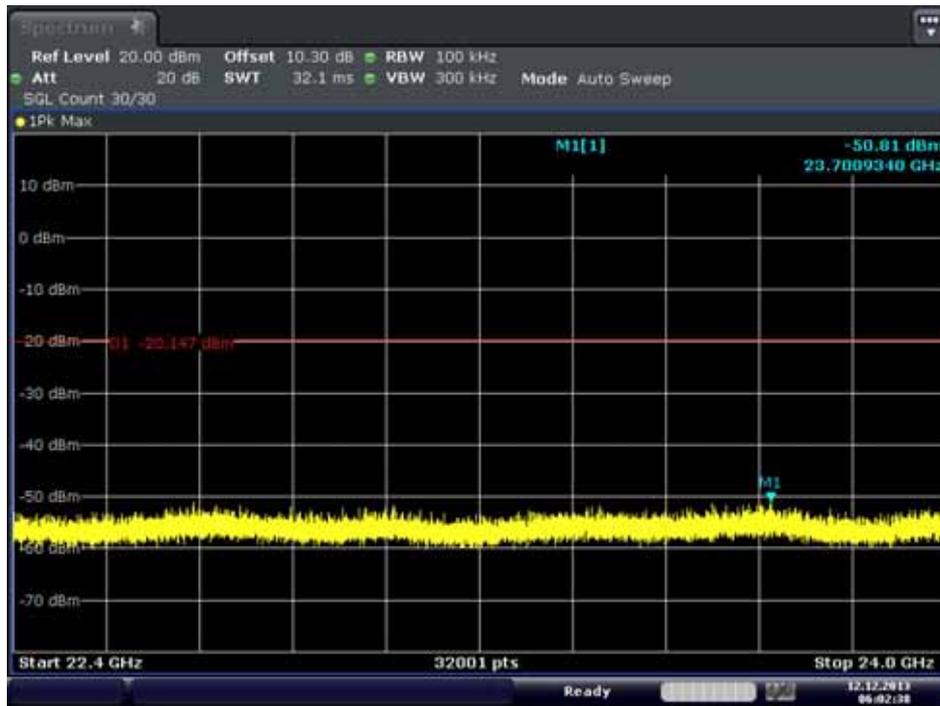

Date: 12.DEC.2013 06:02:38

24 GHz ~ 25.6 GHz

Conducted Spurious Emission (802.11a-CH149) _20 MHz BW

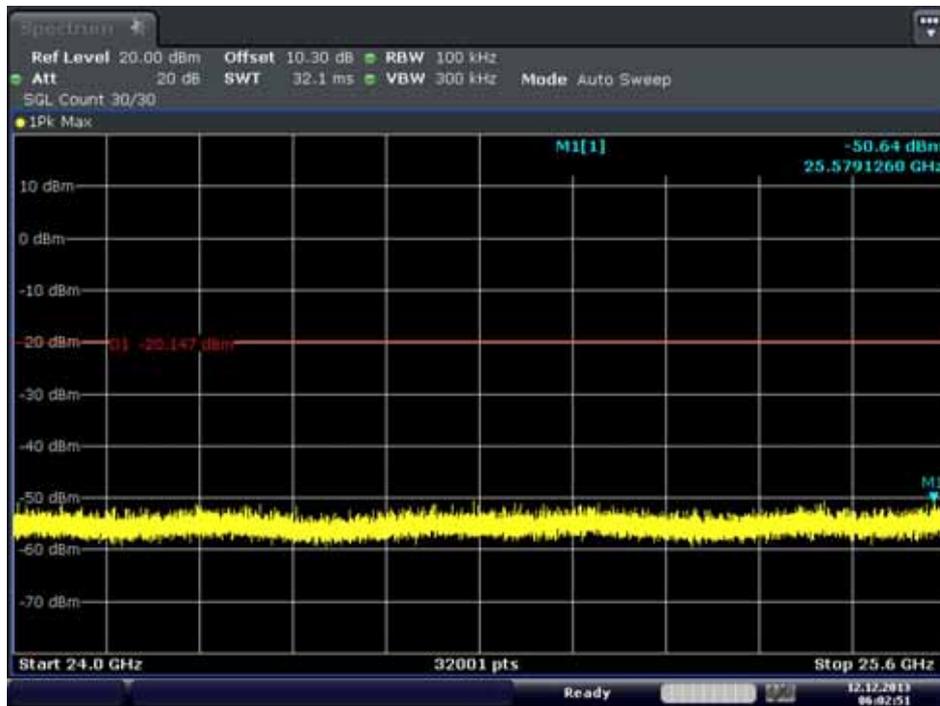


Date: 12.DEC.2013 06:02:51

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNF0956

25.6 GHz ~ 27.2 GHz


Conducted Spurious Emission (802.11a-CH149) _20 MHz BW

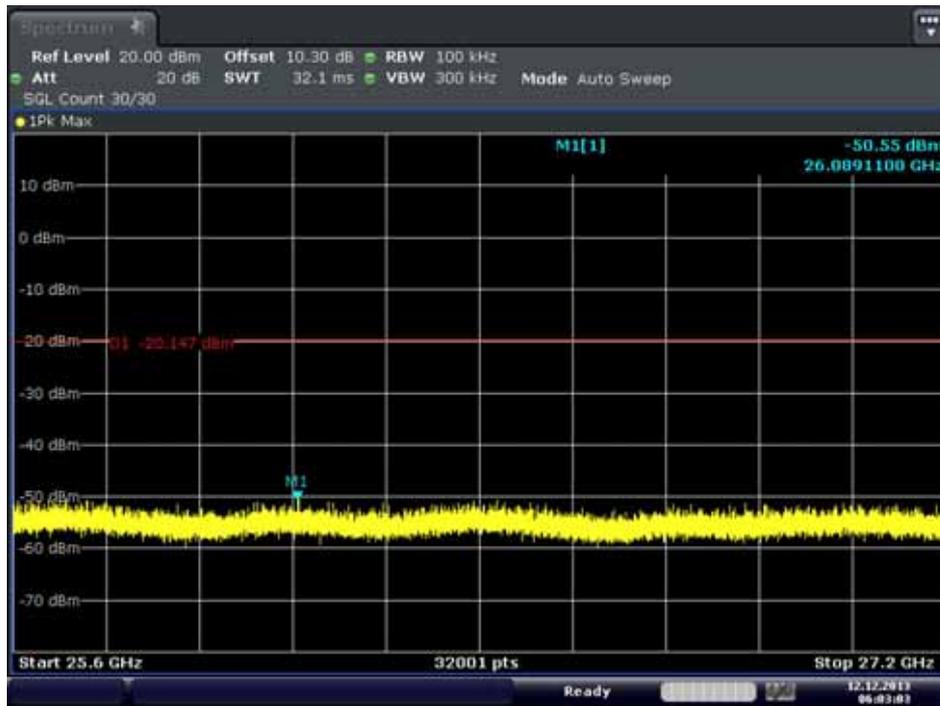

Date: 12.DEC.2013 06:03:03

27.2 GHz ~ 28.8 GHz

Conducted Spurious Emission (802.11a-CH149) _20 MHz BW

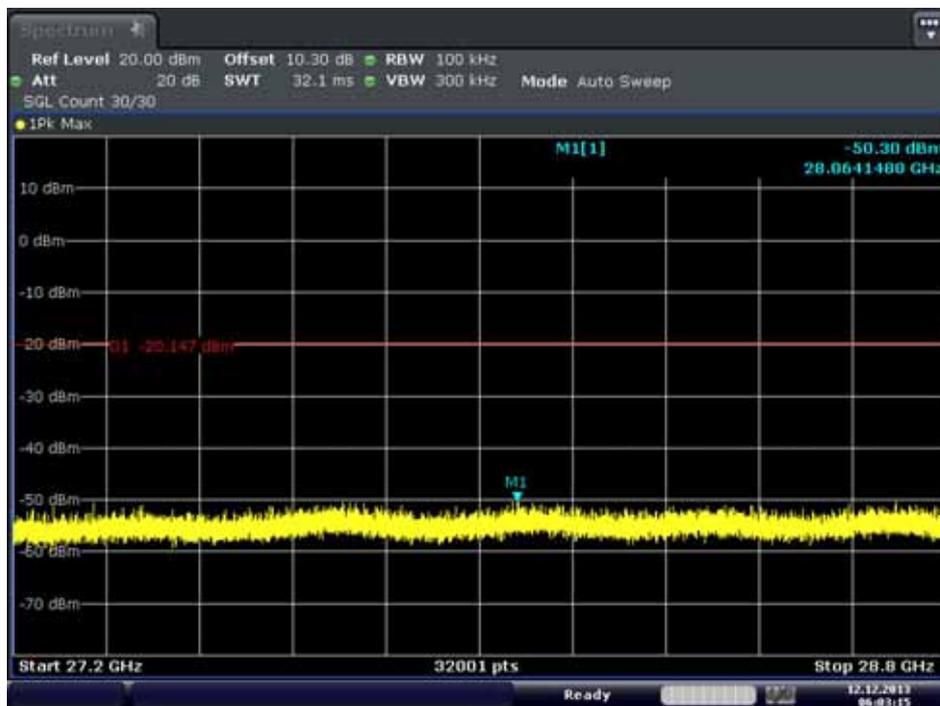


Date: 12.DEC.2013 06:03:16

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNF0956

28.8 GHz ~ 30.4 GHz


Conducted Spurious Emission (802.11a-CH149) _20 MHz BW

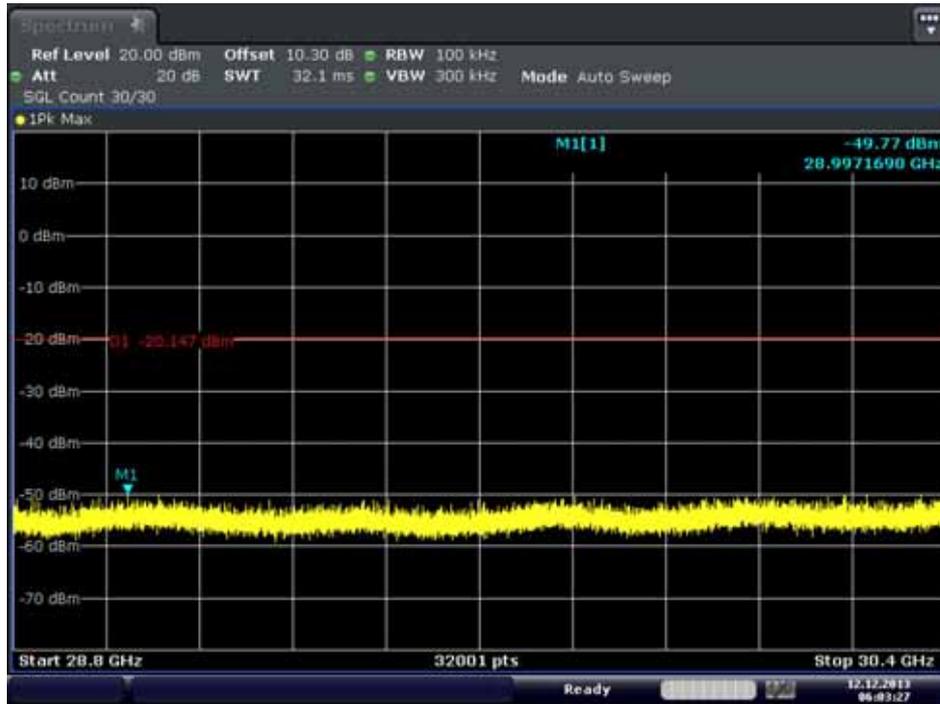

Date: 12.DEC.2013 06:03:28

30.4 GHz ~ 32 GHz

Conducted Spurious Emission (802.11a-CH149) _20 MHz BW

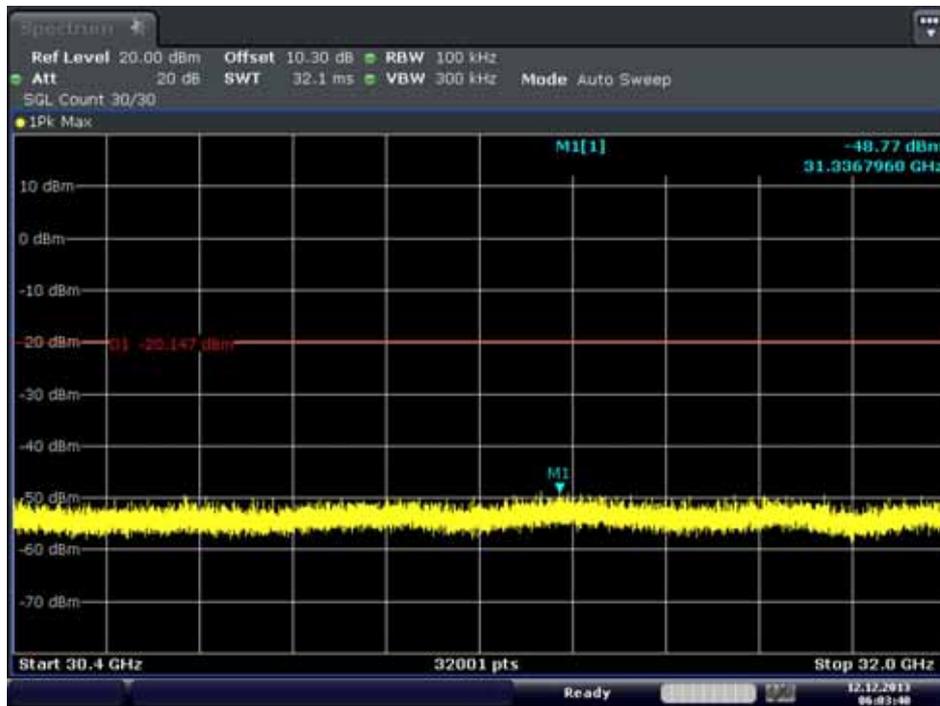


Date: 12.DEC.2013 06:03:40

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNF0956

32 GHz ~ 33.6 GHz


Conducted Spurious Emission (802.11a-CH149) _20 MHz BW

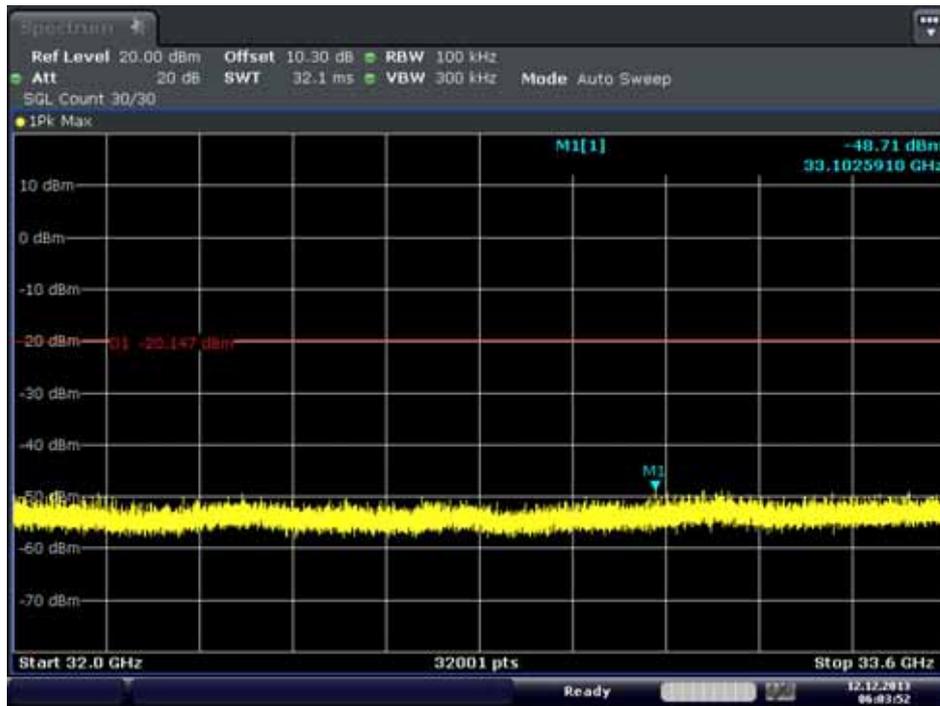

Date: 12.DEC.2013 06:03:52

33.6 GHz ~ 35.2 GHz

Conducted Spurious Emission (802.11a-CH149) _20 MHz BW

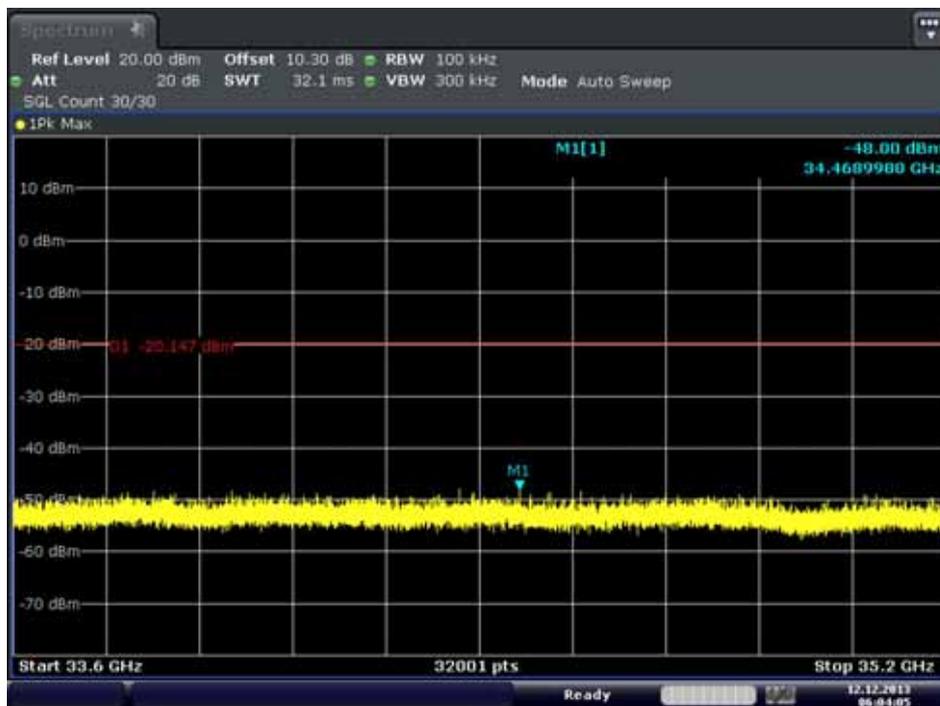


Date: 12.DEC.2013 06:04:05

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNF0956

35.2 GHz ~ 36.8 GHz


Conducted Spurious Emission (802.11a-CH149) _20 MHz BW

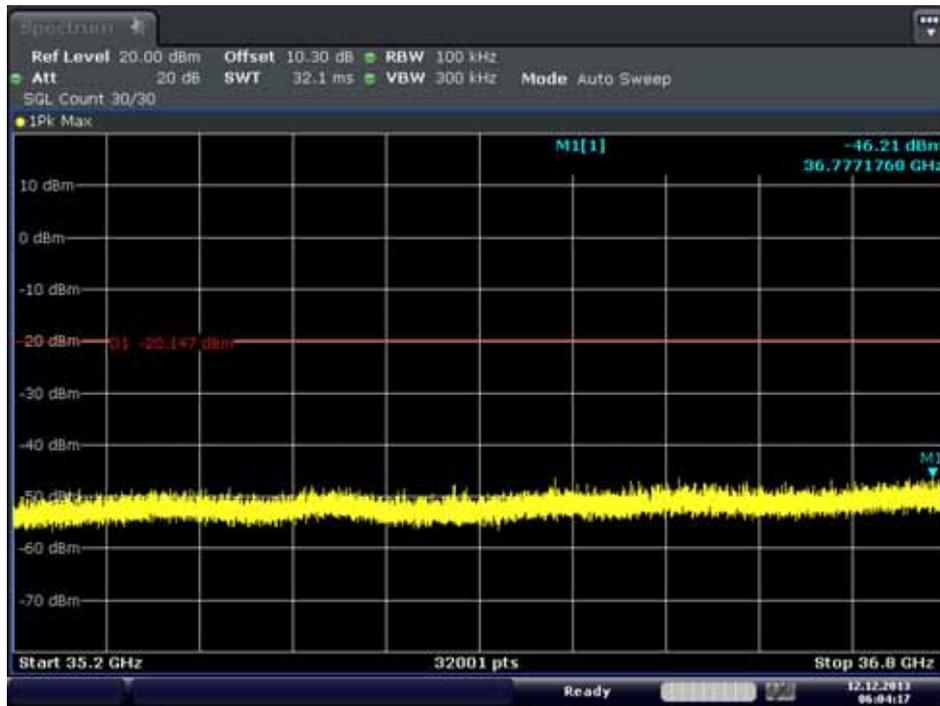

Date: 12.DEC.2013 06:04:17

36.8 GHz ~ 38.4 GHz

Conducted Spurious Emission (802.11a-CH149) _20 MHz BW

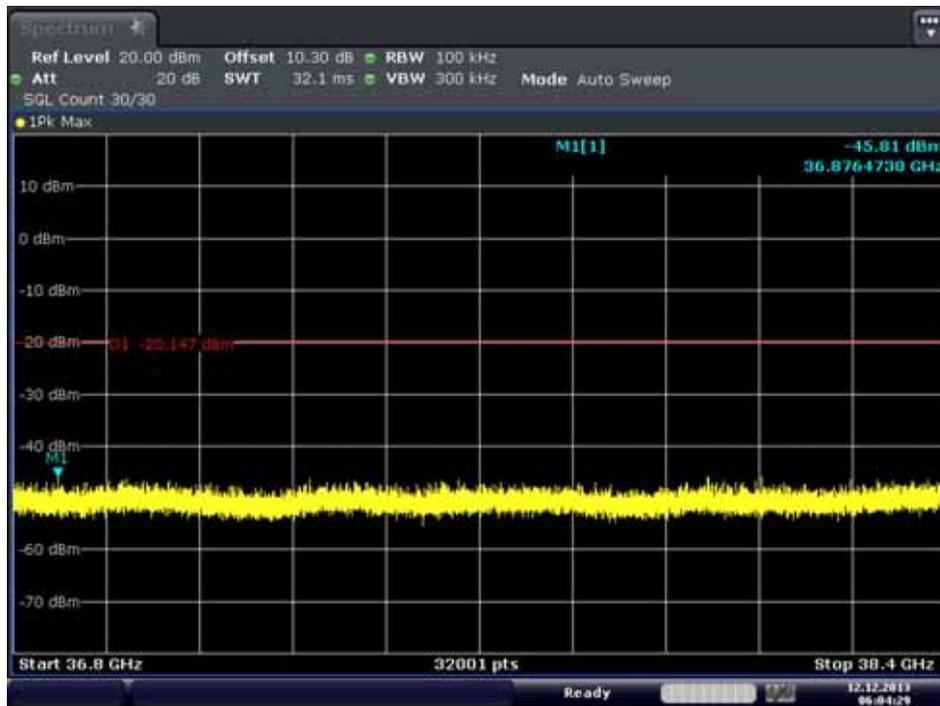


Date: 12.DEC.2013 06:04:30

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNF0956

38.4 GHz ~ 40 GHz

Conducted Spurious Emission (802.11a-CH149) _20 MHz BW

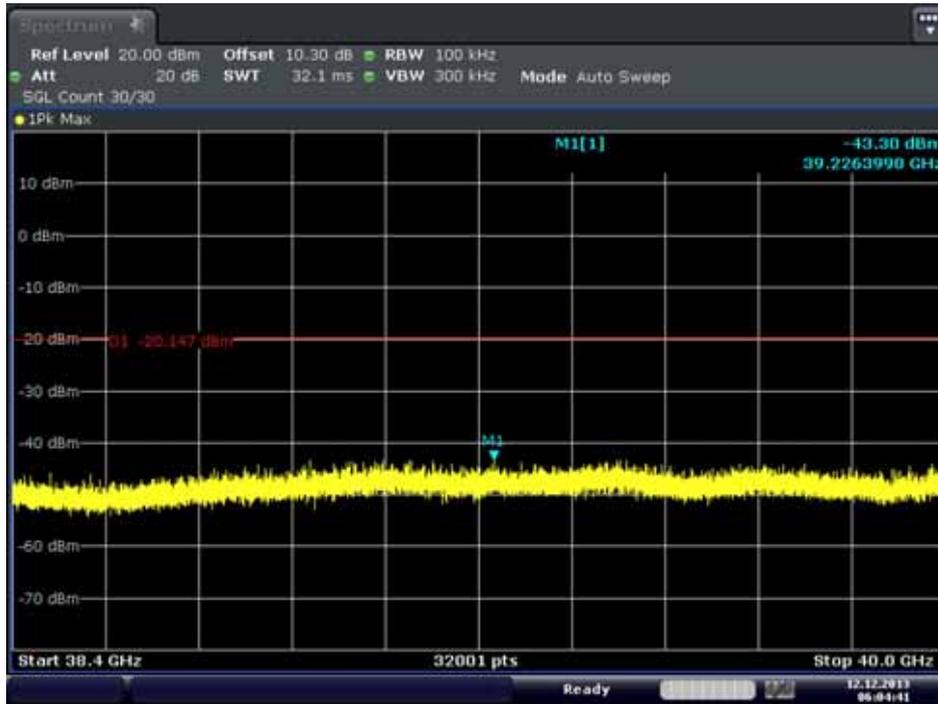

Date: 12.DEC.2013 06:04:42

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNFD956

8.6 RADIATED MEASUREMENT.


8.6.1 RADIATED SPURIOUS EMISSIONS.

Test Requirements and limit, §15.205, §15.209


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

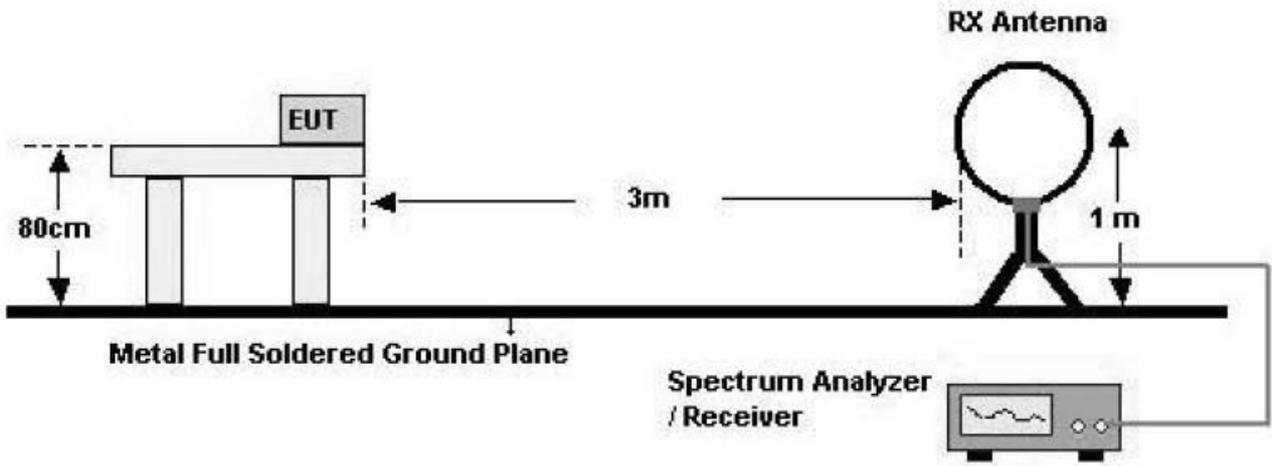

30 MHz - 1 GHz

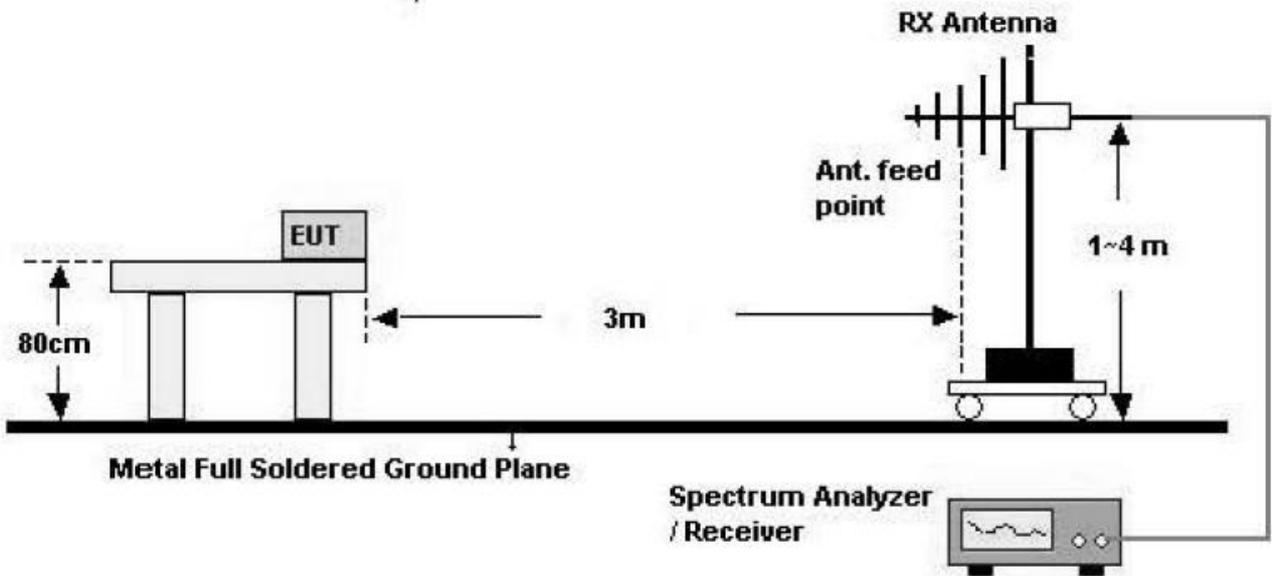

Above 1 GHz

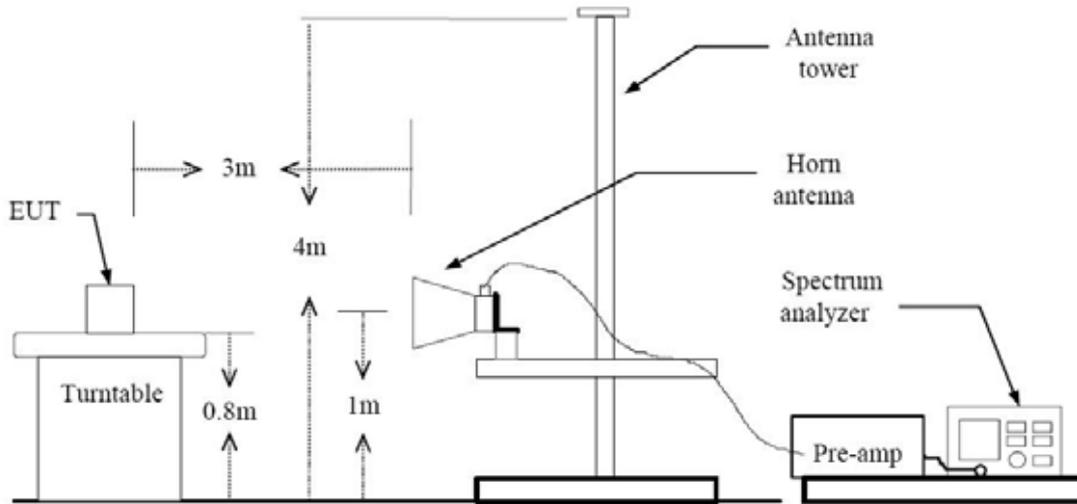

TEST PROCEDURE USED

ANSI C63.4(2003)

Method 12.2.4 in KDB 558074, issued 04/09/2013 (Peak)

Method 12.2.5.1 in KDB 558074, issued 04/09/2013(Average Case 1)

Method 12.2.5.3 in KDB 558074, issued 04/09/2013(Average Case 2)

Spectrum Setting

- Peak

Peak emission levels are measured by setting the instrument as follows:

RBW = cf. Table 1.

VBW \geq 3 x RBW.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweeps to continue until the trace stabilizes.

(Note that the required measurement time may be longer for low duty cycle applications).

Table 1 —RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz



- Average

Case 1

If the EUT can be configured or modified to transmit continuously (duty cycle ≥ 98 percent then the average emission levels shall be measured using the following method (with EUT transmitting continuously).

RBW = 1 MHz (unless otherwise specified).

VBW ≥ 3 x RBW.

Detector = RMS, if span/(# of points in sweep) ≤ (RBW/2). Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.

Averaging type = power (i.e., RMS).

- 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
- 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.

Sweep time = auto.

Perform a trace average of at least 100 traces.

Case 2

If continuous transmission of the EUT (i.e., duty cycle ≥ 98 percent) cannot be achieved and the duty cycle is not constant (i.e., duty cycle variations exceed ± 2 percent), then the following procedure shall be used:

Set RBW = 1 MHz.

Set VBW ≥ 1/T.

Video bandwidth mode or display mode

- 1) The instrument shall be set to ensure that video filtering is applied in the power domain. Typically, this requires setting the detector mode to RMS and setting the Average-VBW Type to Power (RMS).
- 2) As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Allow max hold to run for at least 50 times (1/duty cycle) traces.

Note :

- 1. We used the case 1 for 802.11b mode and the case 2 for 802.11a/g/n_20/n_40/ac_20/ac_40/ac_80 to perform the average filed strength measurements for RSE and radiated band edge test.
- 2. The actual setting value of VBW for 802.11a/g/n_20/n_40/ac_20/ac_40/ac_80.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNFD956

Mode	Worst Data rate (Mbps)	T _{on} (ms)	T _{total} (ms)	Duty Cycle (%)	VBW(1/T) (Hz)	The actual setting value of VBW (Hz)
a	6	2.057	2.170	94.79	486	1000
g	6	2.057	2.170	94.79	486	1000
n_20	6.5	1.915	2.020	94.80	522	1000
n_40	13.5	0.942	1.044	90.23	1062	3000
2.4 GHz band ac_20	6.5	1.925	2.030	94.83	519	1000
5.8 GHz band ac_20	6.5	1.925	2.030	94.83	519	1000
ac_40	13.5	0.942	1.050	89.71	1062	3000
ac_80	29.3	0.458	0.559	81.93	2183	3000



TEST RESULTS

9 kHz – 30MHz

Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V/m	dBm /m	dBm	(H/V)	dB μ V/m	dB μ V/m	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 9 kHz to the 30MHz.
2. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
3. Distance extrapolation factor = 40 log (specific distance / test distance) (dB)
4. Limit line = specific Limits (dBuV) + Distance extrapolation factor
5. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNFD956



TEST RESULTS

Below 1 GHz

Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dB μ V/m	dBm /m	dBm	(H/V)	dB μ V/m	dB μ V/m	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 30 MHz to the 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNFD956



Above 1 GHz

Operation Mode: 802.11 b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2412
 Channel No. 01 Ch

Frequency [MHz]	Reading [dBuV/m]	AN.+CL-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4824	52.79	-4.25	V	48.54	73.98	25.44	PK
4824	42.14	-4.25	V	37.89	53.98	16.09	AV
7236	53.02	5.21	V	58.23	73.98	15.75	PK
7236	41.00	5.21	V	46.21	53.98	7.77	AV
4824	53.25	-4.25	H	49.00	73.98	24.98	PK
4824	43.05	-4.25	H	38.80	53.98	15.18	AV
7236	53.05	5.21	H	58.26	73.98	15.72	PK
7236	41.02	5.21	H	46.23	53.98	7.75	AV

Operation Mode: 802.11 b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2437
 Channel No. 06 Ch

Frequency [MHz]	Reading [dBuV/m]	AN.+CL-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4874	53.01	-3.93	V	49.08	73.98	24.90	PK
4874	42.02	-3.93	V	38.09	53.98	15.89	AV
7311	52.84	4.97	V	57.81	73.98	16.17	PK
7311	40.76	4.97	V	45.73	53.98	8.25	AV
4874	53.14	-3.93	H	49.21	73.98	24.77	PK
4874	42.61	-3.93	H	38.68	53.98	15.30	AV
7311	52.86	4.97	H	57.83	73.98	16.15	PK
7311	40.77	4.97	H	45.74	53.98	8.24	AV



Band :	2.4 GHz
Operation Mode:	802.11 b
Transfer Rate:	1 Mbps
Operating Frequency	2462
Channel No.	11 Ch

Frequency [MHz]	Reading [dBuV/m]	AN.+CL-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4924	52.02	-3.75	V	48.27	73.98	25.71	PK
4924	41.00	-3.75	V	37.25	53.98	16.73	AV
7386	52.92	5.60	V	58.52	73.98	15.46	PK
7386	40.88	5.60	V	46.48	53.98	7.50	AV
4924	52.12	-3.75	H	48.37	73.98	25.61	PK
4924	41.03	-3.75	H	37.28	53.98	16.70	AV
7386	52.94	5.60	H	58.54	73.98	15.44	PK
7386	40.89	5.60	H	46.49	53.98	7.49	AV

Notes:

11. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done 802.11b mode and all data rate. Worst data rate is the lowest data of each mode.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNF956



Band : 2.4 GHz
 Operation Mode: 802.11 g
 Transfer Rate: 6 Mbps
 Operating Frequency 2412
 Channel No. 01 Ch

Frequency [MHz]	Reading [dBuV/m]	AN.+CL-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4824	52.89	-4.25	V	48.64	73.98	25.34	PK
4824	38.91	-4.25	V	34.66	53.98	19.32	AV
7236	53.10	5.21	V	58.31	73.98	15.67	PK
7236	39.05	5.21	V	44.26	53.98	9.72	AV
4824	52.91	-4.25	H	48.66	73.98	25.32	PK
4824	38.92	-4.25	H	34.67	53.98	19.31	AV
7236	53.12	5.21	H	58.33	73.98	15.65	PK
7236	39.08	5.21	H	44.29	53.98	9.69	AV

Band : 2.4 GHz
 Operation Mode: 802.11 g
 Transfer Rate: 6 Mbps
 Operating Frequency 2437
 Channel No. 06 Ch

Frequency [MHz]	Reading [dBuV/m]	AN.+CL-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4874	51.55	-3.93	V	47.62	73.98	26.36	PK
4874	38.31	-3.93	V	34.38	53.98	19.60	AV
7311	52.53	4.97	V	57.50	73.98	16.48	PK
7311	39.00	4.97	V	43.97	53.98	10.01	AV
4874	51.57	-3.93	H	47.64	73.98	26.34	PK
4874	38.32	-3.93	H	34.39	53.98	19.59	AV
7311	52.55	4.97	H	57.52	73.98	16.46	PK
7311	39.02	4.97	H	43.99	53.98	9.99	AV



Band :	2.4 GHz
Operation Mode:	802.11 g
Transfer Rate:	6 Mbps
Operating Frequency	2462
Channel No.	11 Ch

Frequency [MHz]	Reading [dBuV/m]	AN.+CL-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4924	51.78	-3.75	V	48.03	73.98	25.95	PK
4924	37.86	-3.75	V	34.11	53.98	19.87	AV
7386	52.53	5.60	V	58.13	73.98	15.85	PK
7386	39.05	5.60	V	44.65	53.98	9.33	AV
4924	51.79	-3.75	H	48.04	73.98	25.94	PK
4924	37.88	-3.75	H	34.13	53.98	19.85	AV
7386	52.54	5.60	H	58.14	73.98	15.84	PK
7386	39.08	5.60	H	44.68	53.98	9.30	AV

Notes:

11. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done 802.11g mode and all data rate. Worst data rate is the lowest data of each mode.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNFD956



Band : 2.4 GHz
 Operation Mode: 802.11 n
 Transfer Rate: 6.5 Mbps
 Operating Frequency 2412
 Channel No. 01 Ch

Frequency [MHz]	Reading [dBuV/m]	AN.+CL-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4824	52.13	-4.25	V	47.88	73.98	26.10	PK
4824	38.85	-4.25	V	34.60	53.98	19.38	AV
7236	52.76	5.21	V	57.97	73.98	16.01	PK
7236	39.20	5.21	V	44.41	53.98	9.57	AV
4824	52.15	-4.25	H	47.90	73.98	26.08	PK
4824	38.88	-4.25	H	34.63	53.98	19.35	AV
7236	52.79	5.21	H	58.00	73.98	15.98	PK
7236	39.21	5.21	H	44.42	53.98	9.56	AV

Band : 2.4 GHz
 Operation Mode: 802.11 n
 Transfer Rate: 6.5 Mbps
 Operating Frequency 2437
 Channel No. 06 Ch

Frequency [MHz]	Reading [dBuV/m]	AN.+CL-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4874	51.93	-3.93	V	48.00	73.98	25.98	PK
4874	38.25	-3.93	V	34.32	53.98	19.66	AV
7311	52.36	4.97	V	57.33	73.98	16.65	PK
7311	39.05	4.97	V	44.02	53.98	9.96	AV
4874	51.95	-3.93	H	48.02	73.98	25.96	PK
4874	38.27	-3.93	H	34.34	53.98	19.64	AV
7311	52.38	4.97	H	57.35	73.98	16.63	PK
7311	39.06	4.97	H	44.03	53.98	9.95	AV



Band :	2.4 GHz
Operation Mode:	802.11 n
Transfer Rate:	6.5 Mbps
Operating Frequency	2462
Channel No.	11 Ch

Frequency [MHz]	Reading [dBuV/m]	AN.+CL-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4924	51.60	-3.75	V	47.85	73.98	26.13	PK
4924	37.86	-3.75	V	34.11	53.98	19.87	AV
7386	53.25	5.60	V	58.85	73.98	15.13	PK
7386	38.93	5.60	V	44.53	53.98	9.45	AV
4924	51.61	-3.75	H	47.86	73.98	26.12	PK
4924	37.88	-3.75	H	34.13	53.98	19.85	AV
7386	53.27	5.60	H	58.87	73.98	15.11	PK
7386	38.95	5.60	H	44.55	53.98	9.43	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done 802.11n mode and all data rate. Worst data rate is the lowest data of each mode.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNF956



Band : 2.4 GHz
 Operation Mode: 802.11ac
 Transfer Rate: 6.5 Mbps
 Operating Frequency 2412
 Channel No. 01 Ch

Frequency [MHz]	Reading [dBuV/m]	AN.+CL-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4824	52.68	-4.25	V	48.43	73.98	25.55	PK
4824	38.81	-4.25	V	34.56	53.98	19.42	AV
7236	53.27	5.21	V	58.48	73.98	15.50	PK
7236	39.18	5.21	V	44.39	53.98	9.59	AV
4824	52.69	-4.25	H	48.44	73.98	25.54	PK
4824	38.83	-4.25	H	34.58	53.98	19.40	AV
7236	53.29	5.21	H	58.50	73.98	15.48	PK
7236	39.19	5.21	H	44.40	53.98	9.58	AV

Band : 2.4 GHz
 Operation Mode: 802.11ac
 Transfer Rate: 6.5 Mbps
 Operating Frequency 2437
 Channel No. 06 Ch

Frequency [MHz]	Reading [dBuV/m]	AN.+CL-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4874	52.10	-3.93	V	48.17	73.98	25.81	PK
4874	38.07	-3.93	V	34.14	53.98	19.84	AV
7311	52.20	4.97	V	57.17	73.98	16.81	PK
7311	39.05	4.97	V	44.02	53.98	9.96	AV
4874	52.13	-3.93	H	48.20	73.98	25.78	PK
4874	38.08	-3.93	H	34.15	53.98	19.83	AV
7311	52.52	4.97	H	57.49	73.98	16.49	PK
7311	39.08	4.97	H	44.05	53.98	9.93	AV



Band :	2.4 GHz
Operation Mode:	802.11ac
Transfer Rate:	6.5 Mbps
Operating Frequency	2462
Channel No.	11 Ch

Frequency [MHz]	Reading [dBuV/m]	AN.+CL-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
4924	51.56	-3.75	V	47.81	73.98	26.17	PK
4924	37.76	-3.75	V	34.01	53.98	19.97	AV
7386	52.70	5.60	V	58.30	73.98	15.68	PK
7386	38.87	5.60	V	44.47	53.98	9.51	AV
4924	51.58	-3.75	H	47.83	73.98	26.15	PK
4924	37.78	-3.75	H	34.03	53.98	19.95	AV
7386	52.72	5.60	H	58.32	73.98	15.66	PK
7386	38.88	5.60	H	44.48	53.98	9.50	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done 802.11ac mode and all data rate. Worst data rate is the lowest data of each mode.
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNF956



Band : 5.8 GHz
 Operation Mode: 802.11 a
 Transfer Rate: 6 Mbps
 Operating Frequency 5745 MHz
 Channel No. 149 Ch

Frequency [MHz]	Reading [dBuV/m]	AN.+CL-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
11490	39.38	11.22	V	50.60	73.98	23.38	PK
11490	25.27	11.22	V	36.49	53.98	17.49	AV
11490	38.92	11.22	H	50.14	73.98	23.84	PK
11490	25.49	11.22	H	36.71	53.98	17.27	AV

Band : 5.8 GHz
 Operation Mode: 802.11 a
 Transfer Rate: 6 Mbps
 Operating Frequency 5785 MHz
 Channel No. 157 Ch

Frequency [MHz]	Reading [dBuV/m]	AN.+CL-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
11570	38.76	11.71	V	50.47	73.98	23.51	PK
11570	25.41	11.71	V	37.12	53.98	16.86	AV
11570	38.23	11.71	H	49.94	73.98	24.04	PK
11570	25.18	11.71	H	36.89	53.98	17.09	AV



Band :	5.8 GHz
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5825 MHz
Channel No.	165 Ch

Frequency [MHz]	Reading [dBuV/m]	AN.+CL-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
11650	38.27	11.34	V	49.61	73.98	24.37	PK
11650	25.01	11.34	V	36.35	53.98	17.63	AV
11650	37.97	11.34	H	49.31	73.98	24.67	PK
11650	24.94	11.34	H	36.28	53.98	17.70	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done 802.11a mode and all data rate. Worst data rate is the lowest data of each mode
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID		FCC ID: ZNF0956



Band : 5.8 GHz
 Operation Mode: 802.11 n_20 MHz BW
 Transfer Rate: 6.5 Mbps
 Operating Frequency 5745 MHz
 Channel No. 149 Ch

Frequency [MHz]	Reading [dBuV/m]	AN.+CL-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
11490	39.83	11.22	V	51.05	73.98	22.93	PK
11490	25.63	11.22	V	36.85	53.98	17.13	AV
11490	38.46	11.22	H	49.68	73.98	24.30	PK
11490	25.42	11.22	H	36.64	53.98	17.34	AV

Band : 5.8 GHz
 Operation Mode: 802.11 n_20 MHz BW
 Transfer Rate: 6.5 Mbps
 Operating Frequency 5785 MHz
 Channel No. 157 Ch

Frequency [MHz]	Reading [dBuV/m]	AN.+CL-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
11570	38.67	11.71	V	50.38	73.98	23.60	PK
11570	25.40	11.71	V	37.11	53.98	16.87	AV
11570	38.32	11.71	H	50.03	73.98	23.95	PK
11570	25.19	11.71	H	36.90	53.98	17.08	AV



Band :	5.8 GHz
Operation Mode:	802.11 n_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5825 MHz
Channel No.	165 Ch

Frequency [MHz]	Reading [dBuV/m]	AN.+CL-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
11650	38.72	11.34	V	50.06	73.98	23.92	PK
11650	25.10	11.34	V	36.44	53.98	17.54	AV
11650	37.79	11.34	H	49.13	73.98	24.85	PK
11650	24.99	11.34	H	36.33	53.98	17.65	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done 802.11n_20 MHz BW mode and all data rate. Worst data rate is the lowest data of each mode
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID		FCC ID: ZNF956



Band : 5.8 GHz
 Operation Mode: 802.11 n_40 MHz BW
 Transfer Rate: 13.5 Mbps
 Operating Frequency 5755 MHz
 Channel No. 151 Ch

Frequency [MHz]	Reading [dBuV/m]	AN.+CL-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
11510	40.28	11.53	V	51.81	73.98	22.17	PK
11510	26.09	11.53	V	37.62	53.98	16.36	AV
11510	40.21	11.53	H	51.74	73.98	22.24	PK
11510	26.04	11.53	H	37.57	53.98	16.41	AV

Band : 5.8 GHz
 Operation Mode: 802.11 n_40 MHz BW
 Transfer Rate: 13.5 Mbps
 Operating Frequency 5795 MHz
 Channel No. 159 Ch

Frequency [MHz]	Reading [dBuV/m]	AN.+CL-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
11590	39.69	11.64	V	51.33	73.98	22.65	PK
11590	25.69	11.64	V	37.33	53.98	16.65	AV
11590	39.66	11.64	H	51.30	73.98	22.68	PK
11590	25.71	11.64	H	37.35	53.98	16.63	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done 802.11n_40 MHz BW mode and all data rate. Worst data rate is the lowest data of each mode
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNFD956



Band : 5.8 GHz
 Operation Mode: 802.11 ac_20 MHz BW
 Transfer Rate: 6.5 Mbps
 Operating Frequency 5745 MHz
 Channel No. 149 Ch

Frequency [MHz]	Reading [dBuV/m]	AN.+CL-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
11490	39.81	11.22	V	51.03	73.98	22.95	PK
11490	25.60	11.22	V	36.82	53.98	17.16	AV
17235	45.02	18.82	V	63.84	68.2	4.36	PK
11490	38.65	11.22	H	49.87	73.98	24.11	PK
11490	25.43	11.22	H	36.65	53.98	17.33	AV
17235	45.25	18.82	H	64.07	68.2	4.13	PK

Band : 5.8 GHz
 Operation Mode: 802.11 ac_20 MHz BW
 Transfer Rate: 6.5 Mbps
 Operating Frequency 5785 MHz
 Channel No. 157 Ch

Frequency [MHz]	Reading [dBuV/m]	AN.+CL-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
11570	38.61	11.71	V	50.32	73.98	23.66	PK
11570	25.34	11.71	V	37.05	53.98	16.93	AV
17355	44.49	18.94	V	63.43	68.2	4.77	PK
11570	38.45	11.71	H	50.16	73.98	23.82	PK
11570	25.14	11.71	H	36.85	53.98	17.13	AV
17355	45.19	18.94	H	64.13	68.2	4.07	PK



Band :	5.8 GHz
Operation Mode:	802.11 ac_20 MHz BW
Transfer Rate:	6.5 Mbps
Operating Frequency	5825 MHz
Channel No.	165 Ch

Frequency [MHz]	Reading [dBuV/m]	AN.+CL-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
11650	38.71	11.34	V	50.05	73.98	23.93	PK
11650	25.06	11.34	V	36.40	53.98	17.58	AV
17475	45.34	19.52	V	64.86	68.2	3.34	PK
11650	37.89	11.34	H	49.23	73.98	24.75	PK
11650	24.96	11.34	H	36.30	53.98	17.68	AV
17475	45.56	19.52	H	65.08	68.2	3.12	PK

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done 802.11ac mode and all data rate. Worst data rate is the lowest data of each mode
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna
7. In case of 802.11ac, we applied the limit of spurious emissions according to KDB 644545 D01 Alternative Guidance for 802.11ac v01.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNFD956



Band : 5.8 GHz
 Operation Mode: 802.11 ac_40 MHz BW
 Transfer Rate: MCS0
 Operating Frequency 5755 MHz
 Channel No. 151 Ch

Frequency [MHz]	Reading [dBuV/m]	AN.+CL-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
11510	40.25	11.53	V	51.78	73.98	22.20	PK
11510	26.01	11.53	V	37.54	53.98	16.44	AV
17265	45.59	18.46	V	64.05	68.2	4.15	PK
11510	40.20	11.53	H	51.73	73.98	22.25	PK
11510	26.03	11.53	H	37.56	53.98	16.42	AV
17265	45.57	18.46	H	64.03	68.2	4.17	PK

Band : 5.8 GHz
 Operation Mode: 802.11 ac_40 MHz BW
 Transfer Rate: MCS0
 Operating Frequency 5795 MHz
 Channel No. 159 Ch

Frequency [MHz]	Reading [dBuV/m]	AN.+CL-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
11590	39.64	11.64	V	51.28	73.98	22.70	PK
11590	25.63	11.64	V	37.27	53.98	16.71	AV
17385	45.76	18.91	V	64.67	68.2	3.53	PK
11590	39.61	11.64	H	51.25	73.98	22.73	PK
11590	25.69	11.64	H	37.33	53.98	16.65	AV
17385	45.62	18.91	H	64.53	68.2	3.67	PK



Band :	5.8 GHz
Operation Mode:	802.11 ac _80 MHz BW
Transfer Rate:	MCS0
Operating Frequency	5775 MHz
Channel No.	155 Ch

Frequency [MHz]	Reading [dBuV/m]	AN.+CL-AMP G [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
11550	39.12	11.50	V	50.62	73.98	23.36	PK
11550	26.18	11.50	V	37.68	53.98	16.30	AV
17325	44.78	18.90	V	63.68	68.2	4.52	PK
11550	39.00	11.50	H	50.50	73.98	23.48	PK
11550	26.21	11.50	H	37.71	53.98	16.27	AV
17325	44.57	18.90	H	63.47	68.2	4.73	PK

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain
5. We have done 802.11ac mode and all data rate. Worst data rate is the lowest data of each mode
6. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna
7. In case of 802.11ac, we applied the limit of spurious emissions according to KDB 644545 D01 Alternative Guidance for 802.11ac v01.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNF956



8.6.2 RADIATED RESTRICTED BAND EDGES

Test Requirements and limit, §15.247(d) §15.205, §15.209

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a) (See section 15.205(c)).

Band :	2.4 GHz
Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV/m]	AN.+CL [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2390.0	30.41	33.90	H	64.31	73.98	9.67	PK
2390.0	11.95	33.90	H	45.85	53.98	8.13	AV
2390.0	30.40	33.90	V	64.30	73.98	9.68	PK
2390.0	11.93	33.90	V	45.83	53.98	8.15	AV
2483.5	31.31	33.99	H	65.30	73.98	8.68	PK
2483.5	13.14	33.99	H	47.13	53.98	6.85	AV
2483.5	30.72	33.99	V	64.71	73.98	9.27	PK
2483.5	12.23	33.99	V	46.22	53.98	7.76	AV

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNFD956



Band : 2.4 GHz
 Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency 2412 MHz, 2462 MHz
 Channel No. 01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV/m]	AN.+CL [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2390.0	25.82	33.90	H	59.72	73.98	14.26	PK
2390.0	13.89	33.90	H	47.79	53.98	6.19	AV
2390.0	25.32	33.90	V	59.22	73.98	14.76	PK
2390.0	13.13	33.90	V	47.03	53.98	6.95	AV
2483.5	26.26	33.99	H	60.25	73.98	13.73	PK
2483.5	14.72	33.99	H	48.71	53.98	5.27	AV
2483.5	25.74	33.99	V	59.73	73.98	14.25	PK
2483.5	13.83	33.99	V	47.82	53.98	6.16	AV

Band : 2.4 GHz
 Operation Mode: 802.11n
 Transfer Rate: 6.5 Mbps
 Operating Frequency 2412 MHz, 2462 MHz
 Channel No. 01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV/m]	AN.+CL [dBm]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2390.0	31.95	33.90	H	65.85	73.98	8.13	PK
2390.0	12.13	33.90	H	46.03	53.98	7.95	AV
2390.0	31.89	33.90	V	65.79	73.98	8.19	PK
2390.0	12.10	33.90	V	46.00	53.98	7.98	AV
2483.5	34.06	33.99	H	68.05	73.98	5.93	PK
2483.5	13.76	33.99	H	47.75	53.98	6.23	AV
2483.5	33.58	33.99	V	67.57	73.98	6.41	PK
2483.5	12.88	33.99	V	46.87	53.98	7.11	AV



Band :	2.4 GHz
Operation Mode:	802.11ac
Transfer Rate:	6.5 Mbps
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency [MHz]	Reading dBuV	AN.+CL [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
2390.0	31.42	33.90	H	65.32	73.98	8.66	PK
2390.0	11.91	33.90	H	45.81	53.98	8.17	AV
2390.0	31.21	33.90	V	65.11	73.98	8.87	PK
2390.0	11.90	33.90	V	45.80	53.98	8.18	AV
2483.5	34.17	33.99	H	68.16	73.98	5.82	PK
2483.5	13.16	33.99	H	47.15	53.98	6.83	AV
2483.5	33.69	33.99	V	67.68	73.98	6.30	PK
2483.5	12.26	33.99	V	46.25	53.98	7.73	AV

Notes:

1. Total = Reading Value + Antenna Factor + Cable Loss
2. We have done 802.11b/g/n/ac mode and all data rate. Worst data rate is the lowest data of each mode.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID		FCC ID: ZNFD956



Band: 5.8 GHz
 Operation Mode: 802.11ac_20 MHz
 Transfer Rate: 6.5 Mbps
 Operating Frequency: 5825 MHz
 Channel No. 165 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp Gain [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
*5850	62.79	0.94	H	63.73	68.2	4.47	PK
*5850	62.25	0.94	V	63.19	68.2	5.01	PK

Band: 5.8 GHz
 Operation Mode: 802.11ac_40 MHz
 Transfer Rate: 13.5 Mbps
 Operating Frequency: 5795 MHz
 Channel No. 159 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp Gain [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
*5850	55.73	0.94	H	56.67	68.2	11.53	PK
*5850	54.95	0.94	V	55.89	68.2	12.31	PK

Band: 5.8 GHz
 Operation Mode: 802.11ac_80 MHz
 Transfer Rate: 29.3 Mbps
 Operating Frequency: 5775 MHz
 Channel No. 155 Ch

Frequency [MHz]	Reading dBuV	AN.+CL-Amp Gain [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Detect
*5850	58.86	0.94	H	59.80	68.2	8.40	PK
*5850	58.03	0.94	V	58.97	68.2	9.23	PK

Notes:

1. Total = Reading Value + Antenna Factor + Cable Loss
2. We have done 802.11ac mode and all data rate. Worst data rate is the lowest data of each mode.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT				www.hct.co.kr	
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID				FCC ID: ZNFD956	



- 4. In case of 5.8 GHz band 802.11ac, we applied the limit of spurious emissions according to KDB 644545 D01 Alternative Guidance for 802.11ac v01.
- 5. ‘*’ is radiated band edge test frequency(not restricted band emissions).

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID		FCC ID: ZNFD956

8.7 POWERLINE CONDUCTED EMISSIONS

Test Requirements and limit, §15.207

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.
5. We are performed the AC Power Line Conducted Emission test for 13 Mbps, Ch.6 and 802.11n_20 MHz BW. Because 802.11n_20 MHz BW mode is worst case.

RESULT PLOTS

Conducted Emissions (Line 1)


HCT

EMC

EUT: LG-D956
 Manufacturer: LG
 Operating Condition: WLAN MODE(DTS)
 Test Site: SHIELD ROOM
 Operator: JS LEE
 Test Specification: FCC PART15B
 Comment: H
 Start of Test: 2013-12-11 / 3:03:16 오후

SCAN TABLE: "FCC CLASS B(H)"

Short Description:			FCC CLASS B(H)			
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

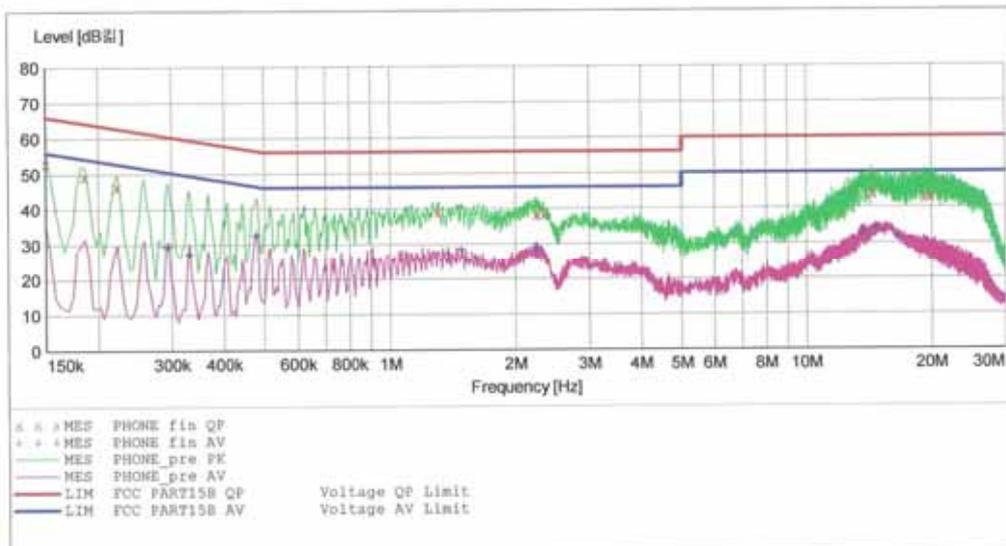

MEASUREMENT RESULT: "PHONE_fin_QP"

2013-12-11 3:05 오후

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.150001	53.00	9.8	66	13.0	---	---
0.186001	49.10	9.8	64	15.1	---	---
0.222001	46.30	9.8	63	16.4	---	---
1.308000	39.00	9.9	56	17.0	---	---
2.244000	38.10	10.0	56	17.9	---	---
2.340000	38.30	10.0	56	17.7	---	---
14.364000	43.90	10.7	60	16.1	---	---
19.276000	42.70	10.9	60	17.3	---	---
19.964000	43.30	10.9	60	16.7	---	---

MEASUREMENT RESULT: "PHONE_fin AV"

2013-12-11 3:05오.후

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.294001	29.30	9.8	50	21.1	---	---
0.330001	27.20	9.8	50	22.2	---	---
0.478001	32.50	9.8	46	13.9	---	---
1.380000	27.10	9.9	46	18.9	---	---
1.488000	28.20	9.9	46	17.8	---	---
2.244000	28.50	10.0	46	17.5	---	---
13.724000	32.50	10.7	50	17.5	---	---
14.652000	33.90	10.7	50	16.1	---	---
16.520000	31.70	10.8	50	18.3	---	---

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNFD956



Conducted Emissions (Line 2)


HCT

EMC

EUT: LG-D956
 Manufacturer: LG
 Operating Condition: WLAN MODE(DTS)
 Test Site: SHIELD ROOM
 Operator: JS LEE
 Test Specification: FCC PART15B
 Comment: N
 Start of Test: 2013-12-11 / 3:08:02 오후

SCAN TABLE: "FCC CLASS B(N)"

Short Description:		FCC CLASS B(N)					
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer	
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				

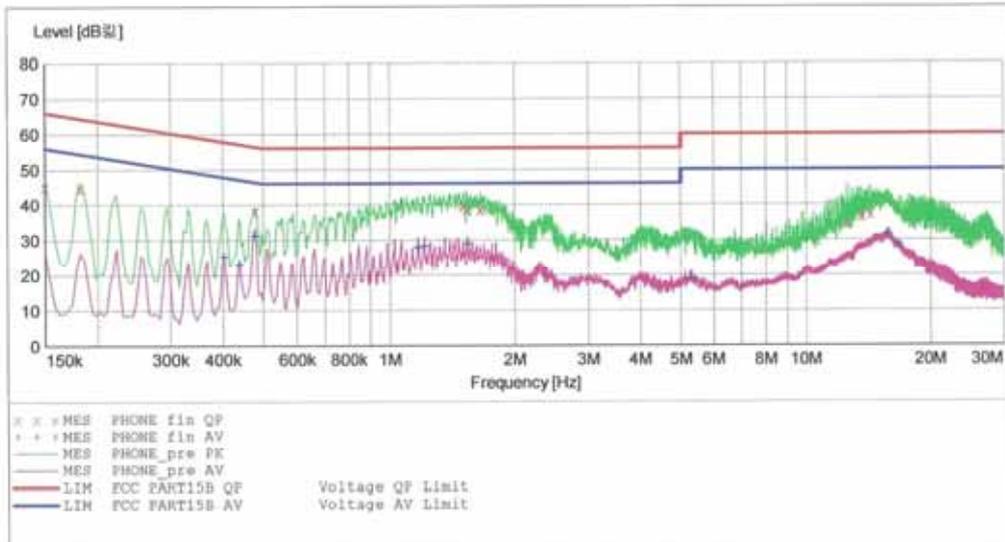

MEASUREMENT RESULT: "PHONE_fin_QP"

2013-12-11 3:10 오후

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.150001	45.20	10.0	66	20.8	---	---
0.182001	44.60	10.0	64	19.8	---	---
0.478001	38.10	10.0	56	18.2	---	---
1.508000	39.70	10.1	56	16.3	---	---
1.532000	38.70	10.1	56	17.3	---	---
1.656000	38.60	10.1	56	17.4	---	---
12.548000	34.60	10.9	60	25.4	---	---
13.604000	36.60	10.9	60	23.4	---	---
14.296000	37.30	11.0	60	22.7	---	---

MEASUREMENT RESULT: "PHONE_fin AV"

2013-12-11 3:10오.卒

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.402001	25.20	10.0	48	22.6	---	---
0.438001	23.10	10.0	47	24.0	---	---
0.478001	31.10	10.0	46	15.3	---	---
1.172000	27.90	10.1	46	18.1	---	---
1.212000	28.30	10.1	46	17.7	---	---
1.540000	28.80	10.1	46	17.2	---	---
5.296000	19.10	10.4	50	30.9	---	---
15.724000	31.30	11.1	50	18.7	---	---
16.628000	28.40	11.1	50	21.6	---	---

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1312FR33	Date of Issue: December 24, 2013	EUT Type: Cellular/PCS GSM/GPRS/EDGE/WCDMA and LTE phone with Bluetooth, WLAN and RFID	FCC ID: ZNFD956

9. LIST OF TEST EQUIPMENT

Manufacturer	Model / Equipment	Calibration Interval	Calibration Due	Serial No.
Rohde & Schwarz	ENV216/ LISN	Annual	02/06/2014	100073
Schwarzbeck	VULB 9160/ TRILOG Antenna	Biennial	12/17/2014	3150
Rohde & Schwarz	ESI 40 / EMI TEST RECEIVER	Annual	04/16/2014	831564103
Agilent	E4440A/ Spectrum Analyzer	Annual	04/25/2014	US45303008
Agilent	N9020A/ SIGNAL ANALYZER	Annual	05/14/2014	MY51110063
HD	MA240/ Antenna Position Tower	N/A	N/A	556
EMCO	1050/ Turn Table	N/A	N/A	114
HD GmbH	HD 100/ Controller	N/A	N/A	13
HD GmbH	KMS 560/ SlideBar	N/A	N/A	12
Rohde & Schwarz	SCU-18/ Signal Conditioning Unit	Annual	09/10/2014	10094
CERNEX	CBL18265035 / POWER AMP	Annual	07/24/2014	22966
CERNEX	CBL26405040 / POWER AMP	Annual	04/16/2014	19660
Schwarzbeck	BBHA 9120D/ Horn Antenna	Biennial	07/05/2015	1151
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	Biennial	10/30/2014	BBHA9170124
Rohde & Schwarz	FSP / Spectrum Analyzer	Annual	02/08/2014	839117/011
Agilent	N1911A /Power Meter	Annual	01/22/2014	MY45100523
Agilent	N1921A /POWER SENSOR	Annual	07/11/2014	MY45241059
Wainwright Instrument	WHF3.0/18G-10EF / High Pass Filter	Annual	02/08/2014	F6
Wainwright Instrument	WHNX6.0/26.5G-6SS / High Pass Filter	Annual	04/16/2014	1
Wainwright Instrument	WHNX7.0/18G-8SS / High Pass Filter	Annual	04/16/2014	29
Wainwright Instrument	WRCJ2400/2483.5-2370/2520-60/14SS / Band Reject Filter	Annual	03/19/2014	1
Hewlett Packard	11636B/Power Divider	Annual	10/22/2014	11377
Agilent	87300B/Directional Coupler	Annual	12/18/2014	3116A03621
Hewlett Packard	11667B / Power Splitter	Annual	05/29/2014	05001
DIGITAL	EP-3010 /DC POWER SUPPLY	Annual	10/29/2014	3110117
ITECH	IT6720 / DC POWER SUPPLY	Annual	11/05/2014	010002156287001199
TESCOM	TC-3000C / BLUETOOTH TESTER	Annual	04/24/2014	3000C000276
Rohde & Schwarz	CBT / BLUETOOTH TESTER	Annual	04/25/2014	100422
EMCO	6502.LOOP ANTENNA	Biennial	01/11/2014	9009-2536
CERNEX	CBLU1183540 / POWER AMP	Annual	07/24/2014	21691
Agilent	8493C / Attenuator(10 dB)	Annual	07/24/2014	76649
WEINSCHTEL	2-3 / Attenuator(3 dB)	Annual	10/28/2014	BR0617