



MEASUREMENT REPORT

FCC PART 15.407 / 15.247 (UNII)

Applicant Name:
LG Electronics MobileComm U.S.A
1000 Sylvan Avenue
Englewood Cliffs, NJ 07632
United States

Date of Testing:
9/19 - 11/4/2013
Test Site/Location:
PCTEST Lab, Columbia, MD, USA
Test Report Serial No.:
0Y1309161887.ZNF

FCC ID:	ZNFD959
APPLICANT:	LG Electronics MobileComm U.S.A

Application Type: Certification
Model(s): LG-D959, D959, LGD959, LG-D959BK, D959BK, LGD959BK
EUT Type: Portable Handset
FCC Classification: Unlicensed National Information Infrastructure (UNII)
FCC Rule Part(s): Part 15.407 / 15.247
Test Procedure(s): KDB 789033 v01r03, KDB 644545 v01r01

Mode	UNII Band	Channel Bandwidth (MHz)	Tx Frequency (MHz)	Conducted Power	
				Max. Power (mW)	Max. Power (dBm)
802.11a	1	20	5180 - 5240	10.666	10.28
	2	20	5260 - 5320	11.246	10.51
	3	20	5500 - 5700	10.520	10.22
	4	20	5745 - 5825	9.354	9.71
802.11n	1	20	5180 - 5240	9.954	9.98
	2	20	5260 - 5320	10.069	10.03
	3	20	5500 - 5700	9.550	9.80
	4	20	5745 - 5825	8.610	9.35
802.11n	1	40	5190 - 5230	10.093	10.04
	2	40	5270 - 5310	10.399	10.17
	3	40	5510 - 5670	9.817	9.92
	4	40	5755 - 5795	8.147	9.11
802.11ac	1	80	5210	7.464	8.73
	2	80	5290	7.568	8.79
	3	80	5530	7.780	8.91
	4	80	5775	7.516	8.76

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 789033 v01r03 and KDB 644545 v01r01. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ormaza
President



FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 1 of 95

TABLE OF CONTENTS

FCC PART 15.407 MEASUREMENT REPORT	3
1.0 INTRODUCTION.....	4
1.1 SCOPE.....	4
1.2 PCTEST TEST LOCATION.....	4
2.0 PRODUCT INFORMATION	5
2.1 EQUIPMENT DESCRIPTION.....	5
2.2 DEVICE CAPABILITIES	5
2.3 TEST CONFIGURATION	5
2.4 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS.....	5
2.5 LABELING REQUIREMENTS.....	5
3.0 DESCRIPTION OF TEST	6
3.1 EVALUATION PROCEDURE.....	6
3.2 AC LINE CONDUCTED EMISSIONS.....	6
3.3 RADIATED EMISSIONS	7
4.0 ANTENNA REQUIREMENTS	8
5.0 TEST EQUIPMENT CALIBRATION DATA.....	9
6.0 TEST RESULTS	10
6.1 SUMMARY	10
6.2 26DB BANDWIDTH MEASUREMENT – 802.11A/N/AC	11
6.3 UNII OUTPUT POWER MEASUREMENT – 802.11A/N/AC	35
6.4 PEAK POWER SPECTRAL DENSITY – 802.11A/N/AC	39
6.5 PEAK EXCURSION RATIO – 802.11A/N/AC.....	61
6.6 FREQUENCY STABILITY	65
6.7 RADIATED SPURIOUS EMISSION MEASUREMENTS.....	69
6.8 RADIATED BAND EDGE MEASUREMENTS (20MHZ BW)	78
6.9 RADIATED BAND EDGE MEASUREMENTS (40MHZ BW)	81
6.10 RADIATED BAND EDGE MEASUREMENTS (80MHZ BW)	84
6.11 LINE-CONDUCTED TEST DATA.....	87
7.0 CONCLUSION	95

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 2 of 95



MEASUREMENT REPORT

FCC Part 15.407



§ 2.1033 General Information

APPLICANT: LG Electronics MobileComm U.S.A

APPLICANT ADDRESS: 1000 Sylvan Avenue
Englewood Cliffs, NJ 07632, United States

TEST SITE: PCTEST ENGINEERING LABORATORY, INC.

TEST SITE ADDRESS: 6660-B Dobbin Road, Columbia, MD 21045 USA

FCC RULE PART(S): Part 15.407

IC SPECIFICATION(S): RSS-210 Issue 8

MODEL NAME: LG-D959

FCC ID: ZNFD959

Test Device Serial No.: Wifi Radiated, Conducted ☐ Production ☒ Pre-Production ☐ Engineering

FCC CLASSIFICATION: Unlicensed National Information Infrastructure (UNII)

DATE(S) OF TEST: 9/19 - 11/4/2013

TEST REPORT S/N: 0Y1309161887.ZNF

Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451A-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451A-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.



FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 3 of 95

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

1.2 PCTEST Test Location

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on January 10, 2012.

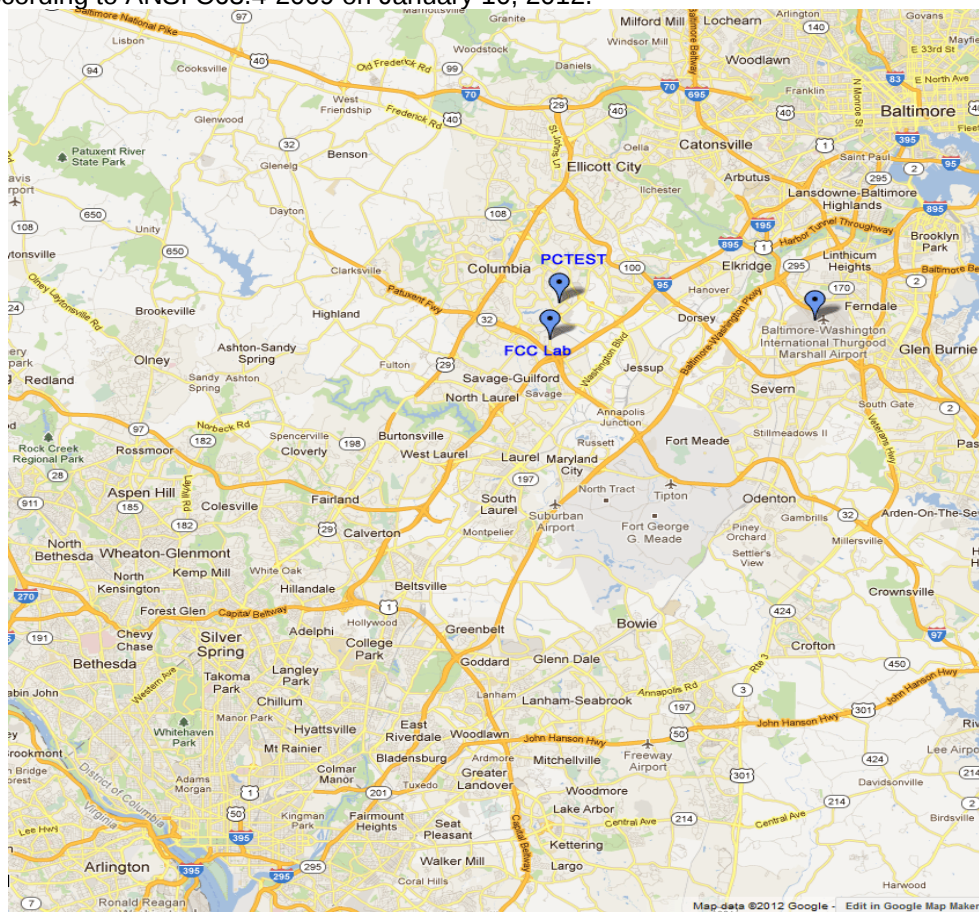


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 4 of 95

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **LGE Portable Handset FCC ID: ZNFD959**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter.

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Band 2 (5, 10, 15, and 20MHz BW), 4 (5, 10, 15, and 20MHz BW), and 17 (5 and 10MHz BW) LTE, 802.11a/b/g/n/ac WLAN (DTS/NII), Bluetooth (1x,EDR, LE), NFC

Note: 5GHz WLAN (DTS/NII) operation is possible in 20MHz, 40MHz, and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B2)b) of KDB 789033. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

- 802.11a/n 20MHz Bandwidth – 95.38 %
- 802.11n 40MHz Bandwidth – 91.42 %
- 802.11ac 80MHz Bandwidth – 83.03 %

2.3 Test Configuration

The LG Portable Handset FCC ID: ZNFD959 was tested per the guidance of KDB 789033. ANSI C63.10-2009 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. U-NII procedures and limits were applied for operations in the frequency band from 5.725-5.850 GHz in accordance with KDB 644545 D02 v01 to demonstrate compliance with 15.247 requirements. See Sections 6.12, 3.3, and 6.1 of this test report for a description of the AC line conducted emissions, radiated emissions, and antenna port conducted emissions test setups, respectively.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.5 Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 5 of 95

3.0 DESCRIPTION OF TEST

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2009) and the guidance provided in KDB 789033 v01r03 were used in the measurement of **LGE Portable Handset FCC ID: ZNFD959**.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions




Figure 3-1. Shielded Enclosure Line-Conducted Test Facility




Figure 3-2. Line Conducted Emission Test Set-Up




Figure 3-3. Wooden Table & Bonded LISNs




Figure 3-4. LISN Schematic Diagram

The line-conducted facility is located inside a 16'x20'x10' shielded enclosure, manufactured by Ray Proof Series 81 (see Figure 3-1). The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 1.5m away from the sidewall of the shielded room (see Figure 3-2). Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room (see Figure 3-3). Power to the LISNs are filtered by a high-current high-insertion loss Ray Proof power line filter (100dB 14Hz-10GHz). The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure. All electrical cables are shielded by braided tinned copper zipper tubing with an inner diameter of ½".

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the Solar LISN. The LISN schematic diagram is shown (see Figure 3-4). All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements. The bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission emission. Each emission was maximized by varying: power lines, the mode of operation or resolution, clock or data exchange speed, scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz bandwidth for final measurements. Each emission reported was calibrated using a signal generator.

Line conducted emissions test results are shown in Section 6.12. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is the PCTEST Conduction Automatic Measurement, Version 2.7.

FCC ID: ZNFD959	 PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	 LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 6 of 95

3.3 Radiated Emissions




Figure 3-5. 3-Meter Test Site

The radiated test facilities consisted of an indoor semi-anechoic chamber used for exploratory measurements and an open area test site (OATS) used for final measurements. For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies higher than the upper frequency range of the broadband antenna used for testing, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used.

Figure 3-6. Dimensions of Outdoor Test Site

Exploratory measurements were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of a 0.8 meter high non-metallic 1 x 1.5 meter table (see Figure 3-7). The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, turntable azimuth, and receive antenna height was noted for each frequency found. To record the exploratory measurements, the analyzers' detector function was set to peak mode and the bandwidth was set to 100kHz.




Figure 3-7. Turntable and System Setup

Final measurements were made on the OATS at 3 meter test range using calibrated, linearly polarized broadband or horn antennas (see Figure 3-5). The measurement area is situated on an 18 meter x 20 meter galvanized 1/2" hardware cloth as the conducting ground plane. This material is sewn together in sections 4 feet wide and 60 feet long. A total of eighteen sections are required to cover the entire measurement area. Sections are laid across the width of the pad, overlapped 1" and sewn and soldered together at intervals of 3" (7.6 cm.) The terrain of the test site is reasonably flat and level. Power and cable to the test site are buried 18" deep into the ground outside the perimeter of the site. An all-weather non-metallic housing is situated on a 2 x 3 meter area adjacent to the measurement area to house the test equipment (see Figure 3-6). The test set-up was again placed on top of the same a 0.8 meter high non-metallic 1 x 1.5 meter table on the OATS as used for exploratory measurements in the indoor chamber. The test set-up was re-configured to the same setup that was previously determined through exploratory measurements to have produced the worst case emissions. The spectrum analyzer was set to the frequencies found to have caused the highest radiated disturbances with respect to the limit during preliminary radiated measurements. The turntable containing the system was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. For the EUT positioning, "H" is defined with the EUT lying flat on the test surface, "H2" is defined with the EUT standing up on its side, and "V" is defined with the EUT standing upright. The Theoretical Normalized Site Attenuation Curves for both horizontal and vertical polarization are shown in Figure 3-8.




Figure 3-8. Normalized Site Attenuation Curves (H&V)

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 7 of 95

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the Portable Handset are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The LGE Portable Handset FCC ID: ZNFD959 unit complies with the requirement of §15.203.

Band 1		Band 2		Band 3		Band 4	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745
:	:	:	:	:	:	:	:
42	5210	56	5280	116	5580	157	5785
:	:	:	:	:	:	:	:
48	5240	64	5320	144	5720	165	5825

Band 1 Band 2 Band 3
Table 4-1. 802.11a / 802.11n (20MHz) Frequency / Channel Operations

Band 1		Band 2		Band 3		Band 4	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
38	5190	54	5270	102	5510	151	5755
:	:	:	:	:	:	:	:
46	5230	62	5310	110	5550	159	5795
				:	:		
				142	5710		

Band 1 Band 2 Band 3
Table 4-2. 802.11n (40MHz BW) Frequency / Channel Operations

Band 1		Band 2		Band 3		Band 4	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
42	5210	58	5290	106	5530	155	5755

Band 1 Band 2 Band 3
Table 4-3. 802.11ac (80MHz BW) Frequency / Channel Operations

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)					Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset					Page 8 of 95

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	3/29/2013	Annual	3/29/2014	N/A
Agilent	8449B	(1-26.5GHz) Pre-Amplifier	4/17/2013	Annual	4/17/2014	3008A00985
Agilent	N9038A	MXE EMI Receiver	12/8/2012	Annual	12/8/2013	MY51210133
Agilent	N9030A	PXA Signal Analyzer (44GHz)	1/11/2013	Annual	1/11/2014	MY52350166
Agilent	N9020A	MXA Signal Analyzer	10/9/2012	Annual	10/9/2013	US46470561
Agilent	8447D	Broadband Amplifier	5/31/2013	Annual	5/31/2014	1937A03348
Anritsu	MA2411B	Pulse Sensor	10/19/2012	Annual	10/19/2013	1027293
Anritsu	ML2495A	Power Meter	10/11/2012	Annual	10/11/2013	1039008
Emco	3116	Horn Antenna (18 - 40GHz)	1/20/2012	Triennial	1/20/2015	9203-2178
Emco	3816/2	LISN	2/12/2013	Biennial	2/12/2015	9707-1077
Emco	6502	Active Loop Antenna (10k - 30 MHz)	5/31/2012	Biennial	5/31/2014	267
Huber+Suhner	Sucoflex 102A	40GHz Radiated Cable	3/1/2013	Annual	3/1/2014	251425001
Mini-Circuits	VHF-3100+	High Pass Filter	1/21/2013	Annual	1/21/2014	31144
Mini-Circuits	VHF-8400+	3.4GHz - 9.9GHz High Pass Filter	1/17/2013	Annual	1/17/2014	31048
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	5/31/2013	Annual	5/31/2014	100071
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	5/31/2013	Annual	5/31/2014	100040
Rohde & Schwarz	TS-PR40	26.5-40 GHz Pre-Amplifier	6/6/2012	Biennial	6/6/2014	100037
Schwarzbeck	VULB-9161SE	Trilog Super Broadband Test Antenna	11/8/2011	Biennial	11/8/2013	9161-4075
Sunol	DRH-118	Horn Antenna (1-18 GHz)	6/19/2013	Biennial	6/19/2015	A042511

Table 5-1. Annual Test Equipment Calibration Schedule

Note:

For equipment listed above that has a calibration due date that falls within the test date range, care was taken to ensure that this equipment was utilized prior to the calibration due date.

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 9 of 95

6.0 TEST RESULTS

6.1 Summary

Company Name: LG Electronics MobileComm U.S.A
 FCC ID: ZNFD959
 Method/System: Unlicensed National Information Infrastructure (UNII)
 Data Rate(s) Tested: 6, 9, 12, 18, 24, 36, 48, 54Mbps (802.11a)
6.5/7.2, 13/14.4, 19.5/21.7, 26/28.9, 39/43.3, 52/57.8, 58.5/65, 65/72.2 (n – 20MHz)
13.5/15, 27/30, 40.5/45, 54/60, 81/90, 108/120, 121.5/135, 135/150 (n – 40MHz BW)
29.3/32.5Mbps, 58.5/65Mbps, 87.8/97.5Mbps, 117/130Mbps, 175.5/195Mbps,
234/260Mbps, 263.3/292.5Mbps, 292.5/325Mbps, 351/390Mbps, 390/433.3Mbps
(ac – 80MHz BW)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
TRANSMITTER MODE (TX)						
N/A	RSS-210 [A9.2]	26dB Bandwidth [FCC] Occupied Bandwidth [IC]	N/A	CONDUCTED	PASS	Section 6.2
15.407 (a)(1)	RSS-210 [A9.2]	Maximum Conducted Output Power	< 4 + 10log ₁₀ (BW) dBm (5150-5250MHz) [FCC] < 10 + 10log ₁₀ (BW) dBm (5150-5250MHz) [IC] < 11 + 10log ₁₀ (B) dBm (5250-5350MHz, 5470 – 5725MHz)		PASS	Section 6.3
15.407 (a)(1), (5)	RSS-210 [A9.2]	Peak Power Spectral Density	< 4 dBm/MHz (5150-5250) [FCC] < 10dBm/MHz (5150-5250) [IC] < 11dBm/MHz (5250-5350) < 11dBm/MHz (5470-5725)		PASS	Section 6.4
15.407(a)(6)	N/A	Peak Excursion	< 13 dB/MHz maximum difference		PASS	Section 6.5
15.407(g)	N/A	Frequency Stability	N/A		PASS	Section 6.6
15.407(h)	RSS-210 [A9.3]	Dynamic Frequency Selection	See DFS Test Report		PASS	See DFS Test Report
15.407(b)(1), (2),(3)	RSS-210 [A9.2]	Undesirable Emissions	< -27 dBm/MHz EIRP (5150-5350MHz, 5470-5725MHz)	RADIATED	PASS	Section 6.7
15.205, 15.407(b)(1), (5), (6)	RSS-Gen [7.2.3.2]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-210 table 3 limits)		PASS	Section 6.8, 6.9, 6.10
15.207	RSS-Gen [7.2.2]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits or < RSS-Gen table 2 limits	LINE CONDUCTED	PASS	Section 6.11

Table 6-1. Summary of Test Results

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "UNII Automation", Version 2.2.

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 10 of 95

6.2 26dB Bandwidth Measurement – 802.11a/n/ac

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 v01r03, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

The 26dB bandwidth is used to determine the conducted power limits.

Test Procedure Used

KDB 789033 v01r03 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

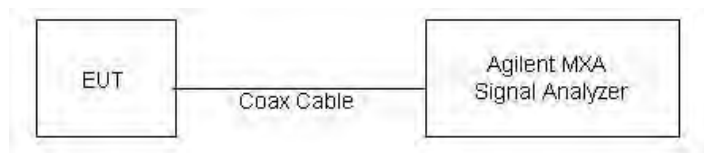


Figure 6-1. Test Instrument & Measurement Setup

Test Notes

Per KDB 644545 v01r01 and 15.215(c), a 20dB bandwidth measurement can be performed to demonstrate that the entire emission of one channel lies solely within a particular band. A 20dB bandwidth plot, representative of all channels, is included at the end of this section to show that the DFS requirements are not applicable in UNII Band 1 since the Band 1 channel does not cross over into Band 2A.

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 11 of 95

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band I	5180	36	a	6	20.34
	5200	40	a	6	20.46
	5240	48	a	6	20.50
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	20.69
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	20.77
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	20.72
	5190	38	n (40MHz)	13.5/15 (MCS0)	39.51
	5230	46	n (40MHz)	13.5/15 (MCS0)	39.83
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	82.76
Band II	5260	52	a	6	20.46
	5280	56	a	6	21.11
	5320	64	a	6	20.41
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	20.89
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	20.80
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	20.90
	5270	54	n (40MHz)	13.5/15 (MCS0)	39.57
	5310	62	n (40MHz)	13.5/15 (MCS0)	39.63
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	82.53
Band III	5500	100	a	6	20.51
	5580	116	a	6	20.38
	5720	144	a	6	20.14
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	20.92
	5580	116	n (20MHz)	6.5/7.2 (MCS0)	20.70
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	20.74
	5510	102	n (40MHz)	13.5/15 (MCS0)	39.91
	5550	110	n (40MHz)	13.5/15 (MCS0)	39.68
	5710	142	n (40MHz)	13.5/15 (MCS0)	39.65
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	82.78
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	81.83


Table 6-2 a. Conducted Bandwidth Measurements

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset			Page 12 of 95


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band IV	5745	149	a	6	20.74
	5785	157	a	6	20.51
	5825	165	a	6	20.65
	5745	149	n (20MHz)	6.5/7.2 (MCS0)	20.83
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	20.82
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	20.86
	5755	151	n (40MHz)	13.5/15 (MCS0)	40.12
	5795	159	n (40MHz)	13.5/15 (MCS0)	39.93
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	82.96

Table 6-2 b. Conducted Bandwidth Measurements

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 13 of 95

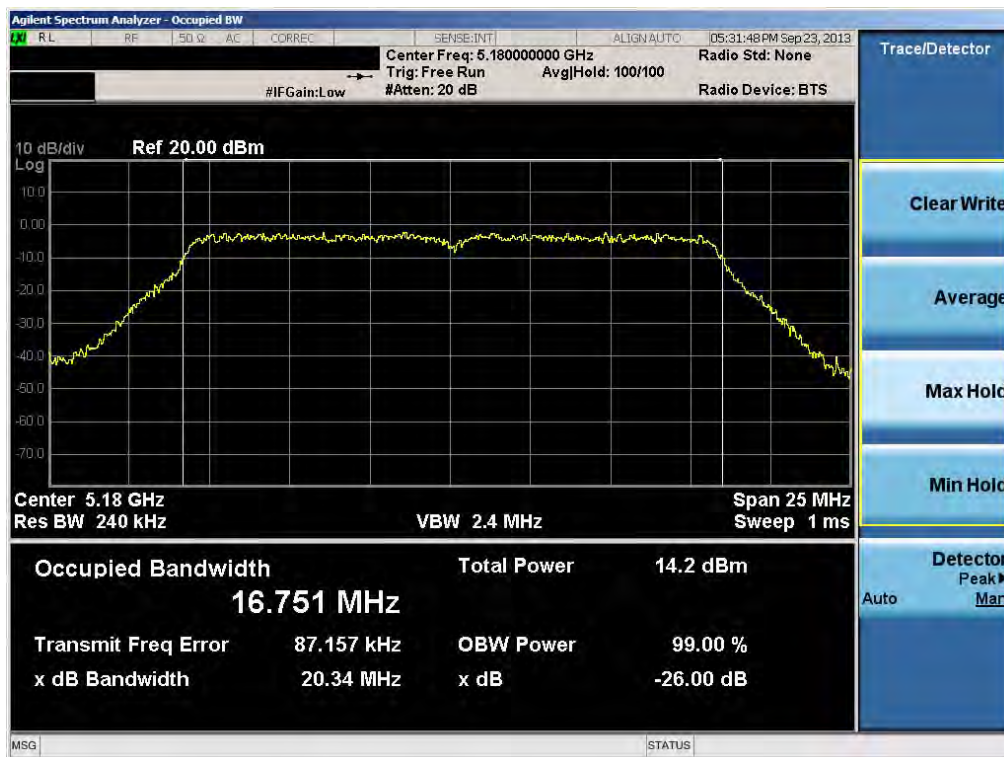


Plot 6-1. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 36)

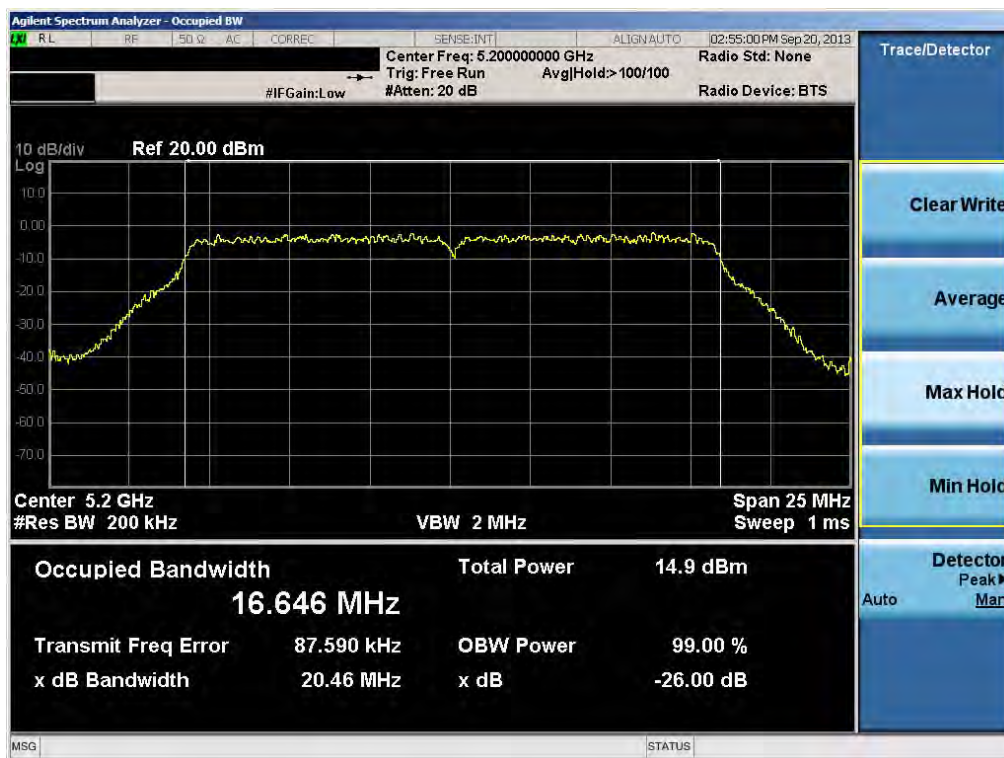


Plot 6-2. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 40)

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 14 of 95

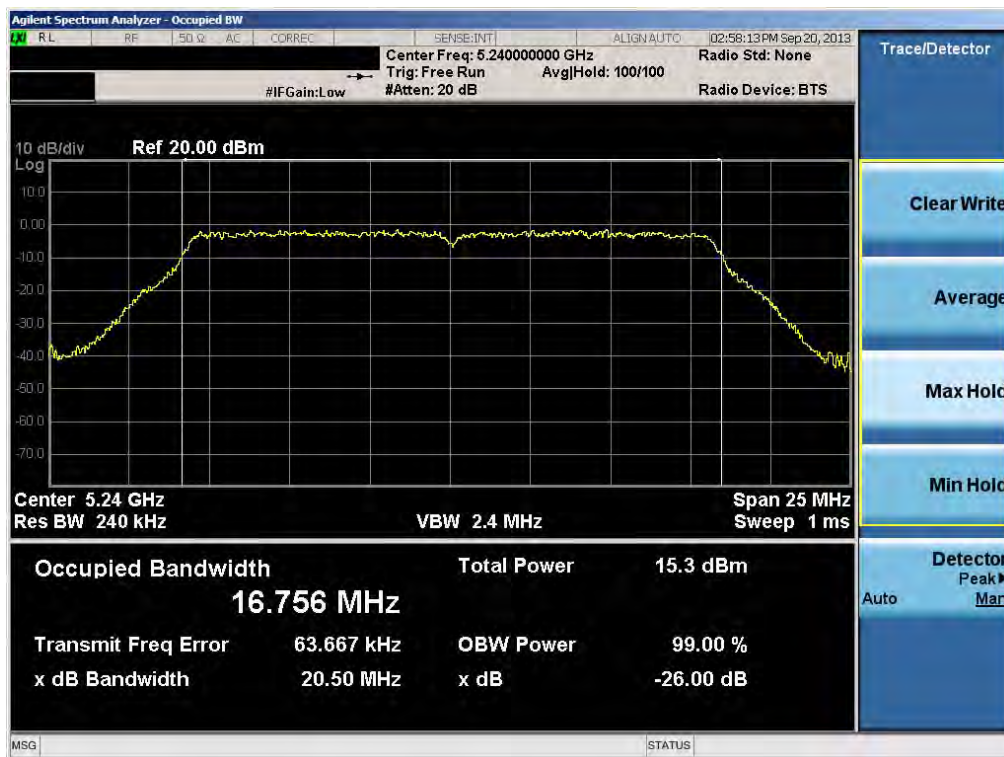

Plot 6-3. 26dB Bandwidth Plot (802.11a (UNII Band 1) – Ch. 48)

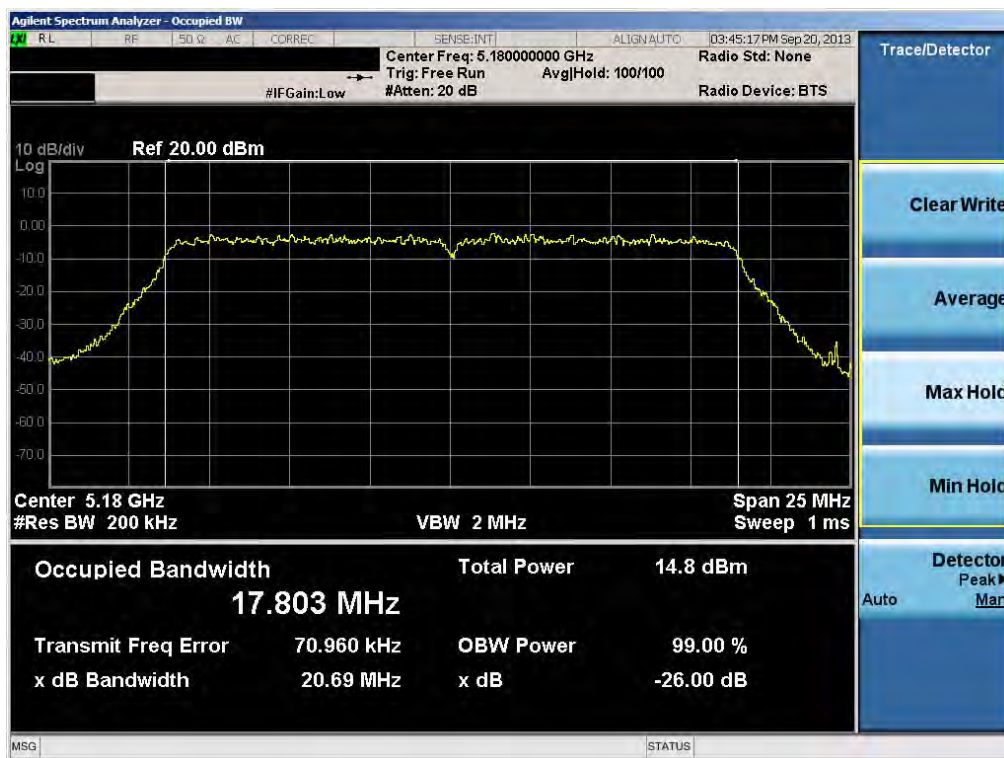


Plot 6-4. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 15 of 95




Plot 6-5. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)

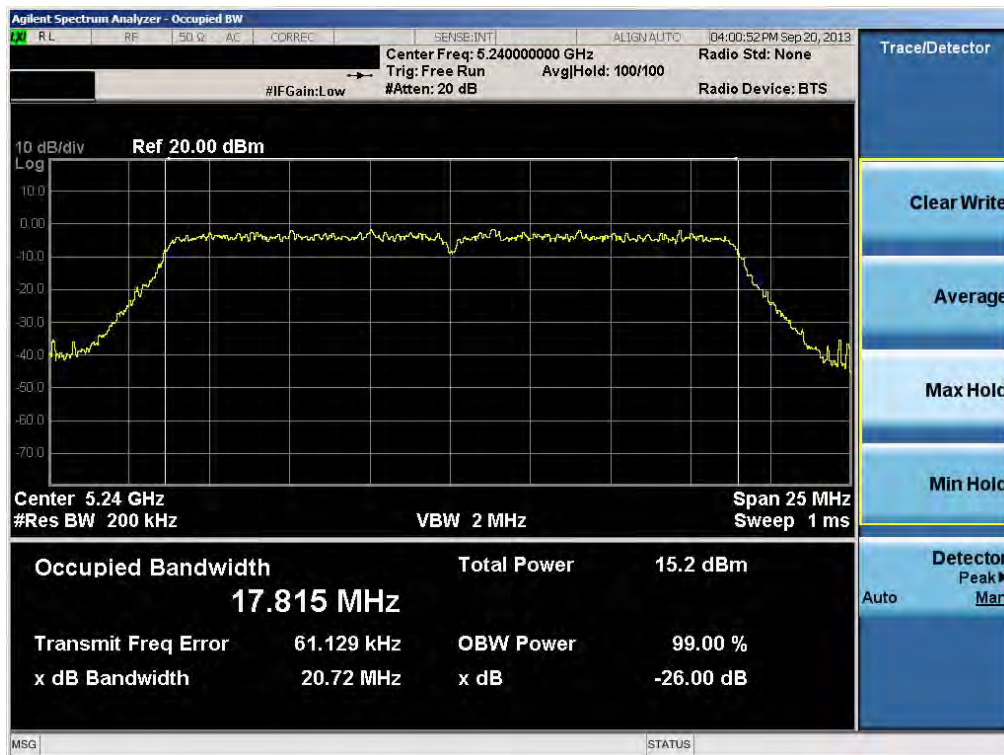


Plot 6-6. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 16 of 95

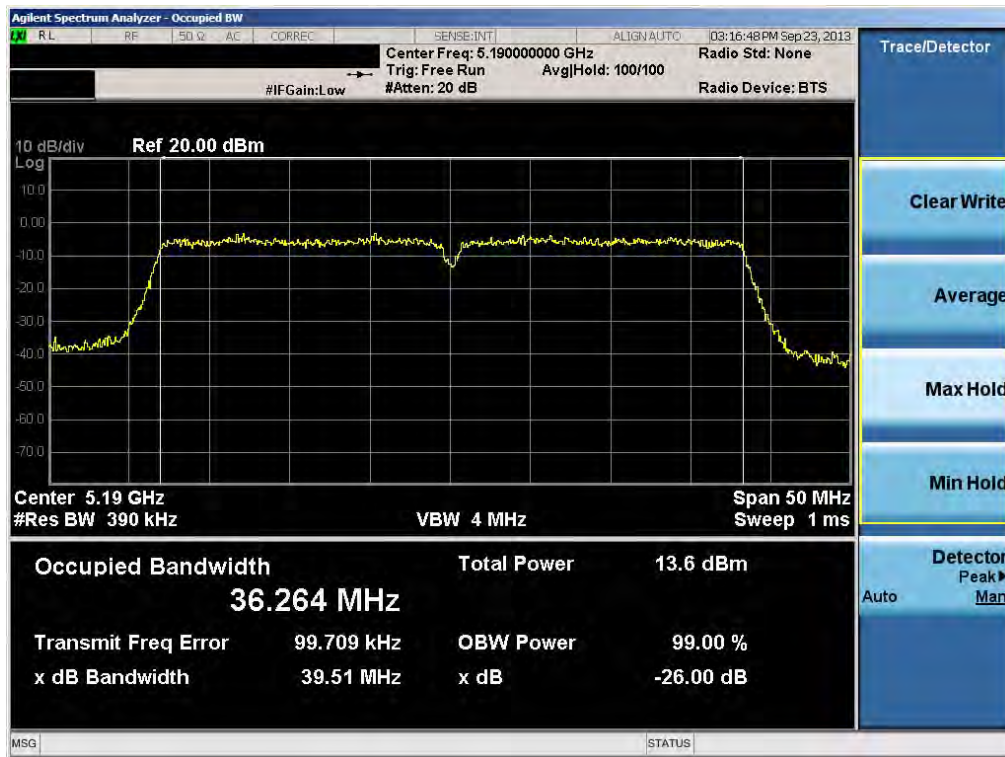


Plot 6-7. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

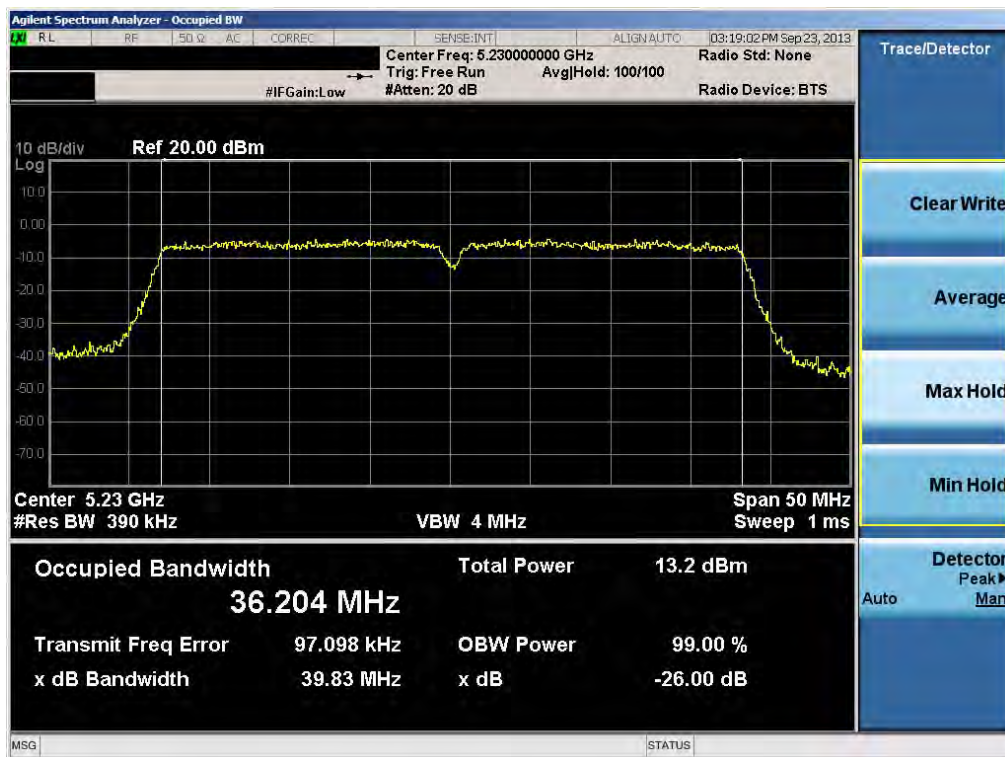


Plot 6-8. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 17 of 95

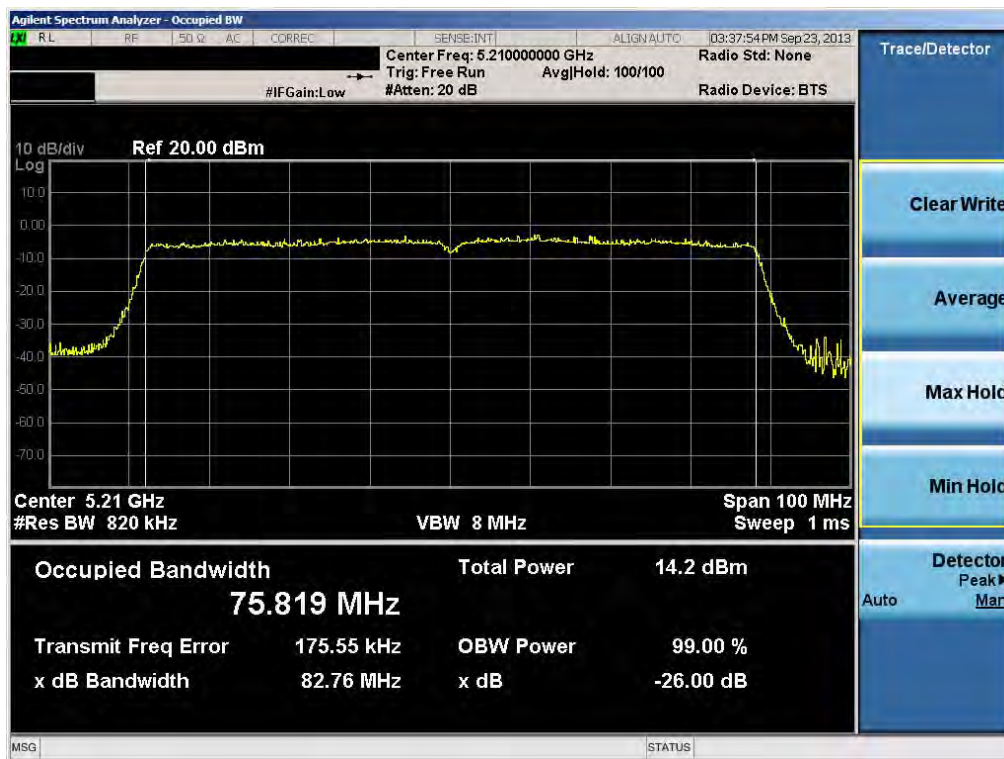


Plot 6-9. 26dB Bandwidth Plot (802.11ac (UNII Band 1) – Ch. 42)

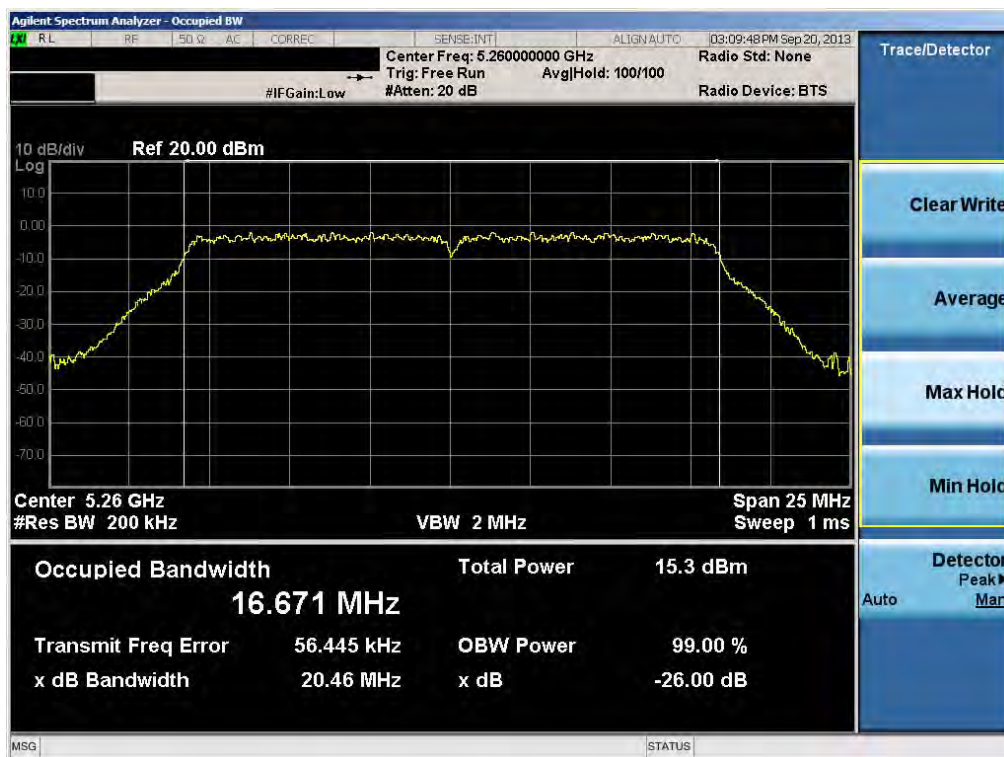


Plot 6-10. 26dB Bandwidth Plot (802.11a (UNII Band 2) – Ch. 52)

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 18 of 95

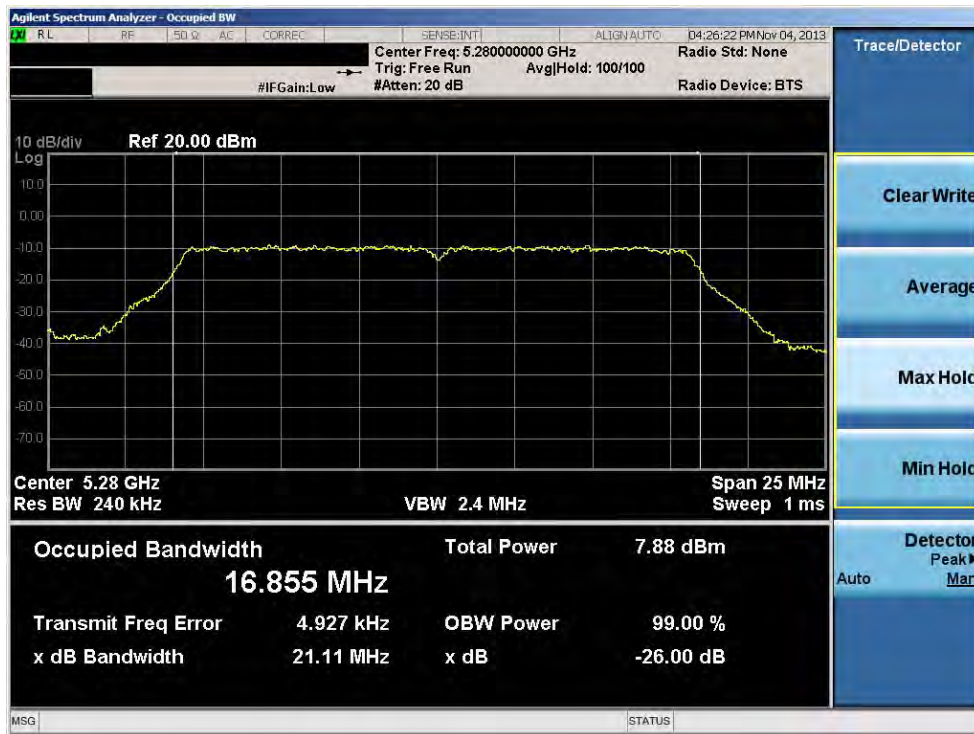


Plot 6-11. 26dB Bandwidth Plot (802.11a (UNII Band 2) – Ch. 56)

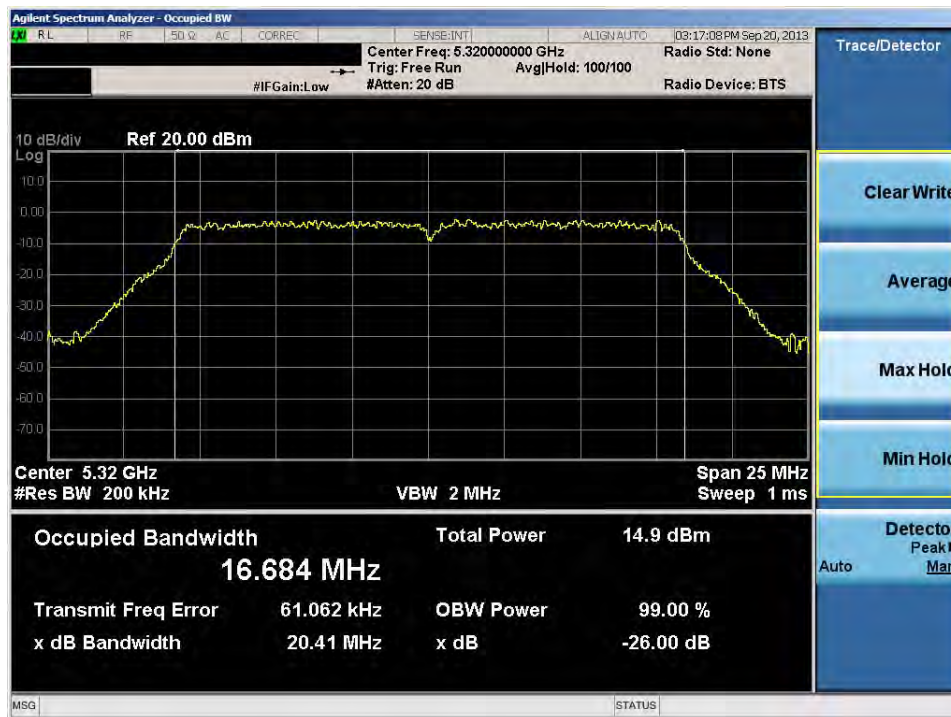


Plot 6-12. 26dB Bandwidth Plot (802.11a (UNII Band 2) – Ch. 64)

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 19 of 95

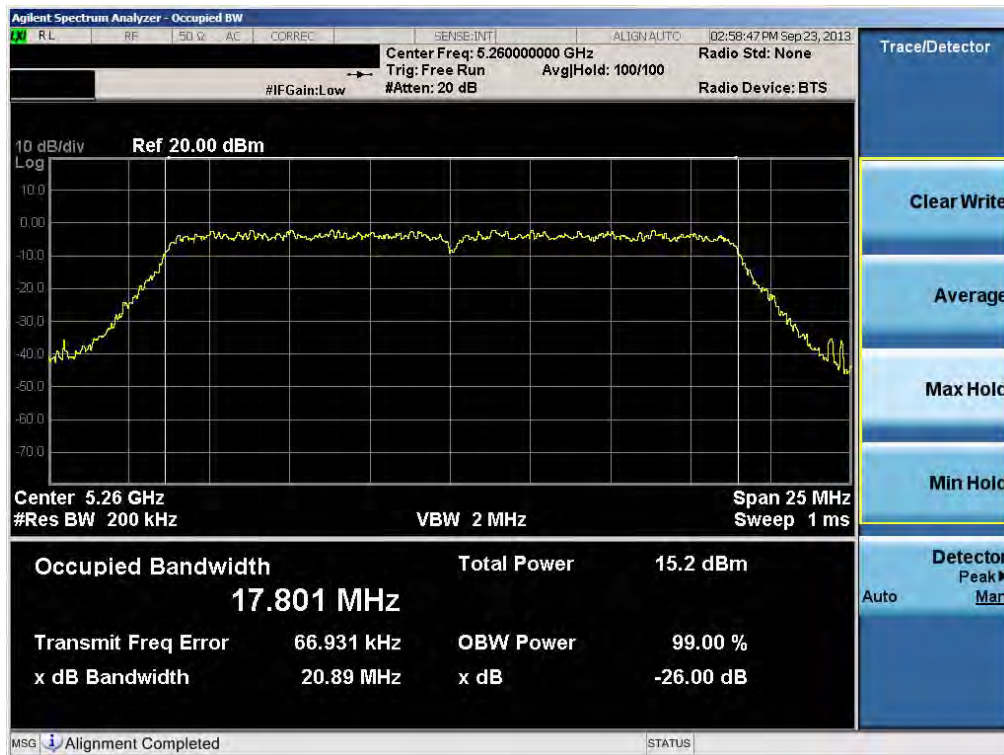


Plot 6-13. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2) – Ch. 52)

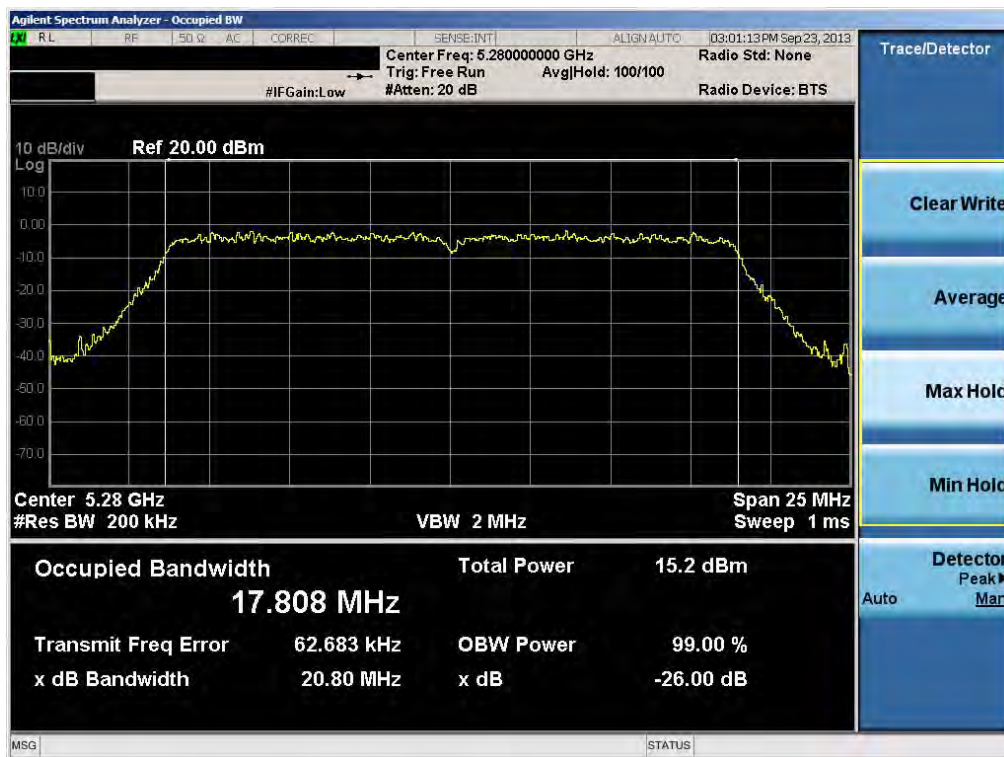


Plot 6-14. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2) – Ch. 56)

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 20 of 95

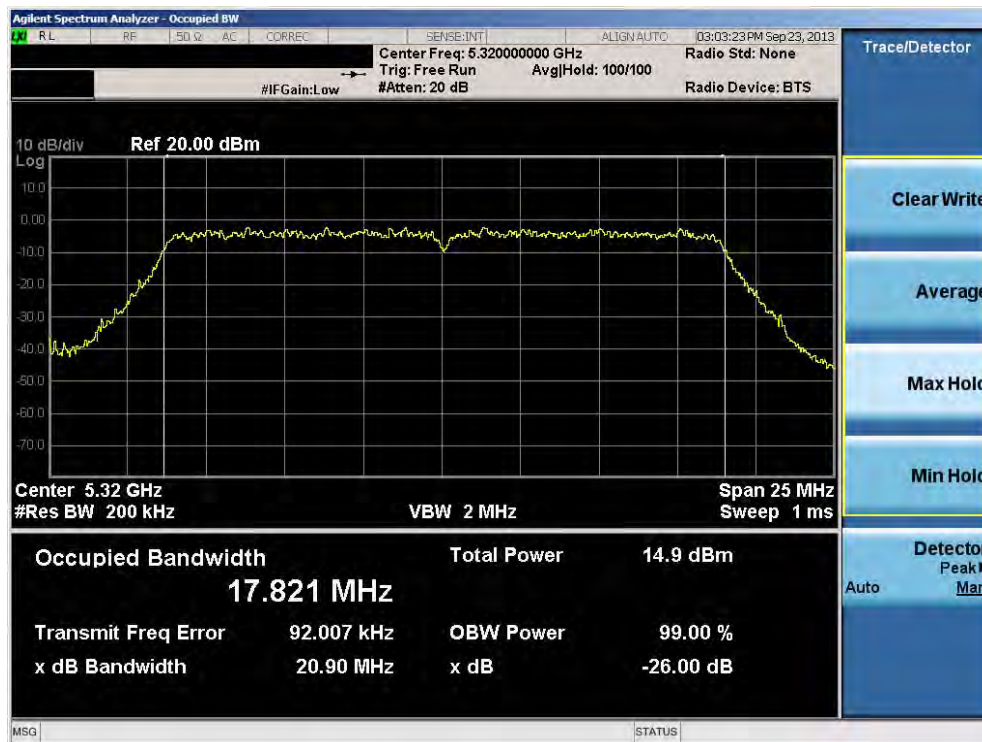


Plot 6-15. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 2) – Ch. 64)

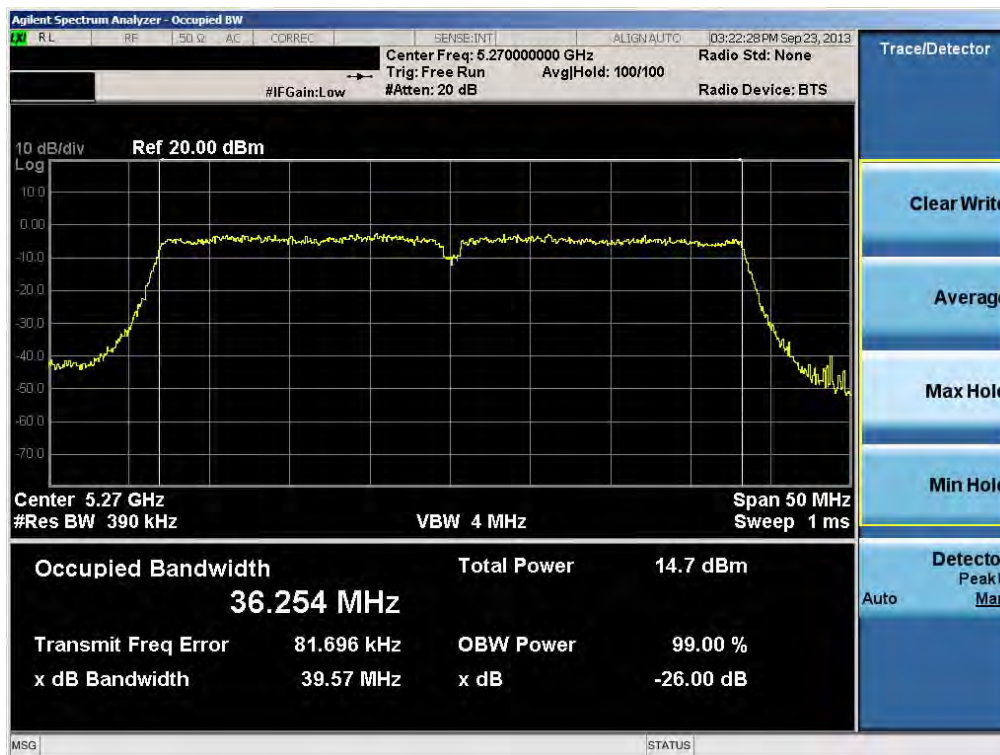

Plot 6-16. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2) – Ch. 54)

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 21 of 95

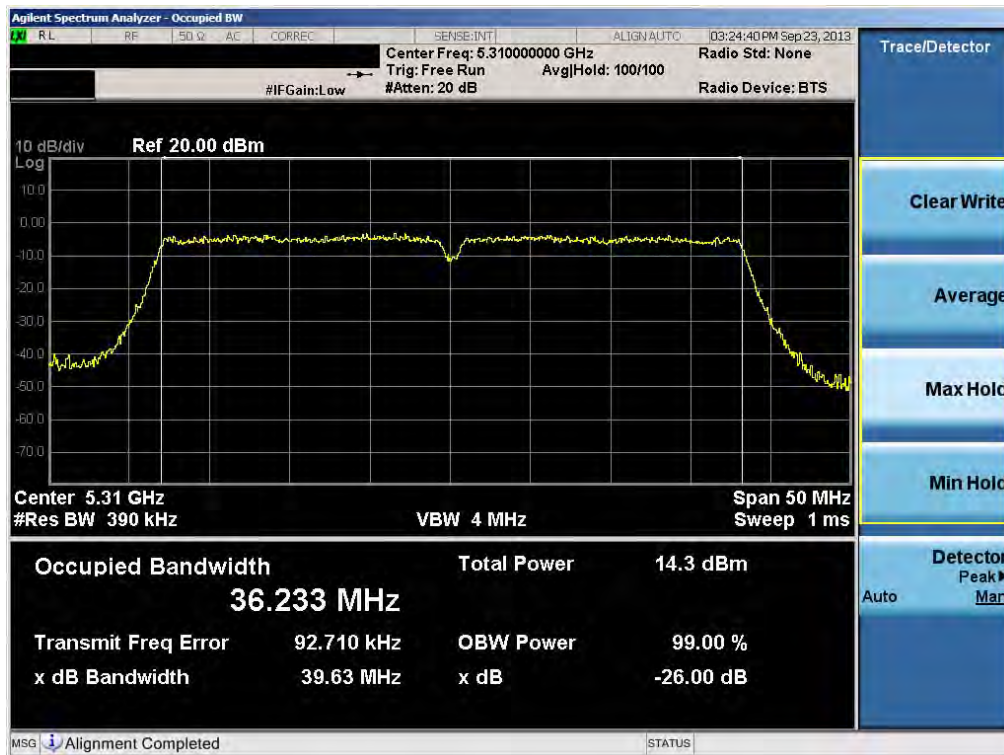

Plot 6-17. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2) – Ch. 62)




Plot 6-18. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 2) – Ch. 58)

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 22 of 95




Plot 6-19. 26dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 100)

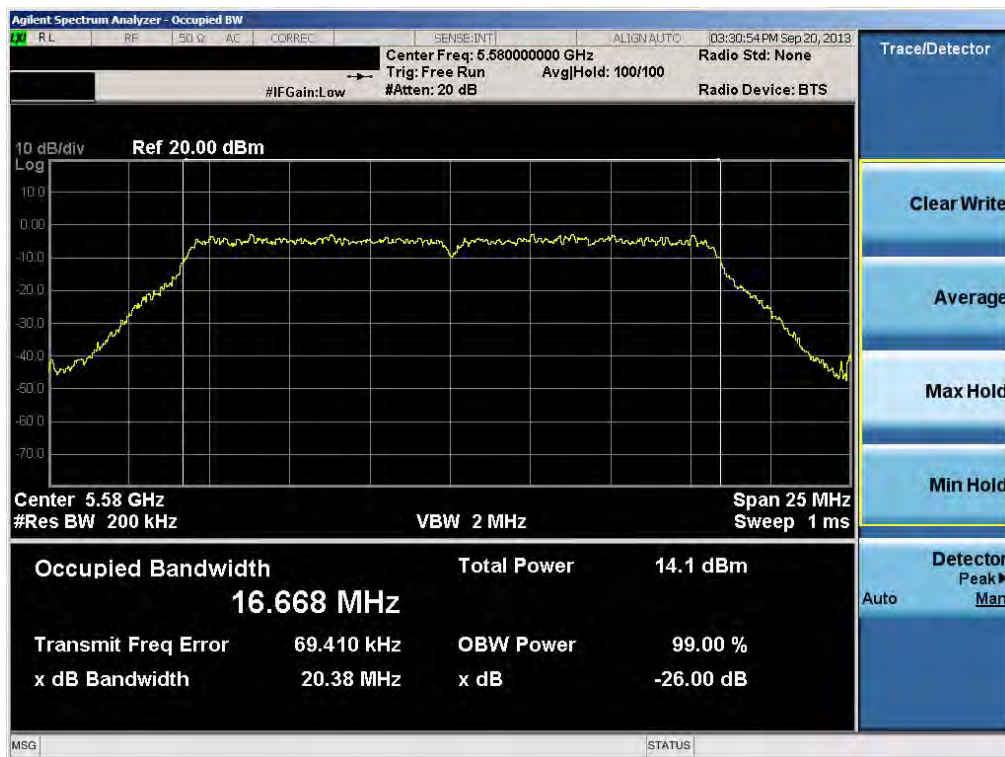


Plot 6-20. 26dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 116)

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 23 of 95

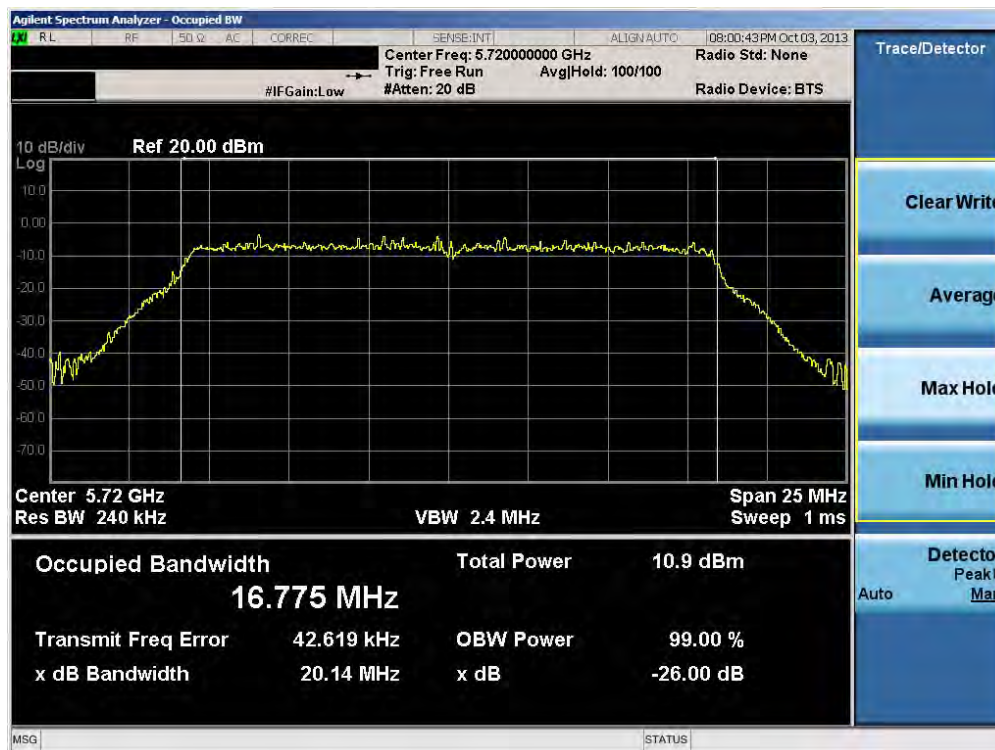

Plot 6-21. 26dB Bandwidth Plot (802.11a (UNII Band 3) – Ch. 144)

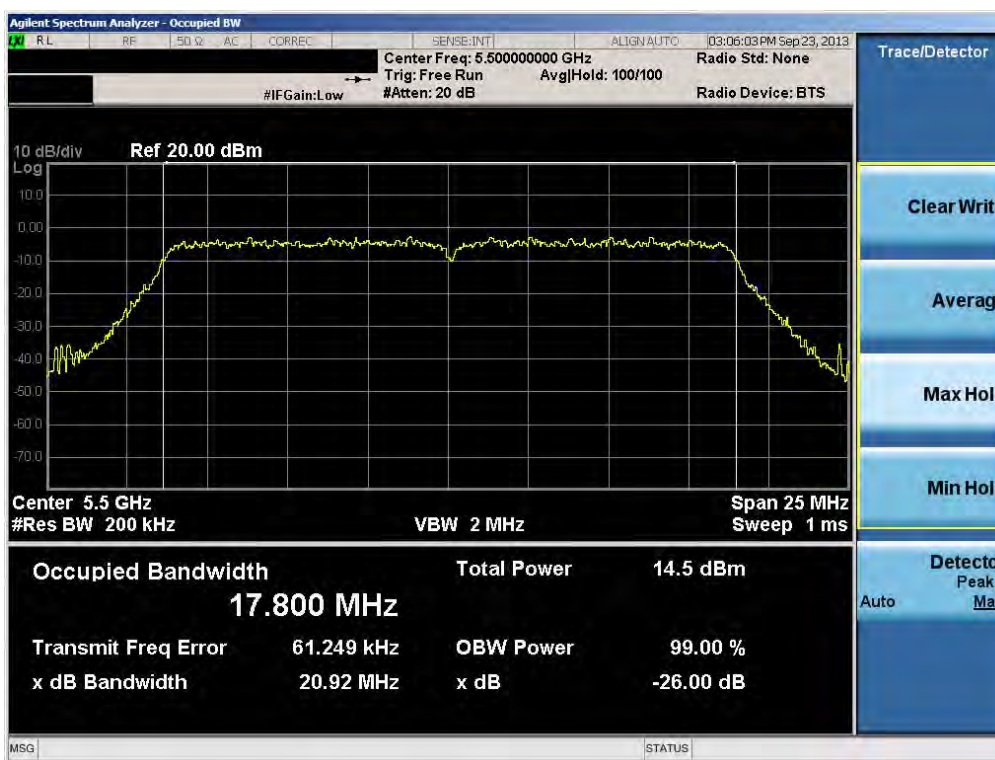


Plot 6-22. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 100)

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 24 of 95




Plot 6-23. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 116)

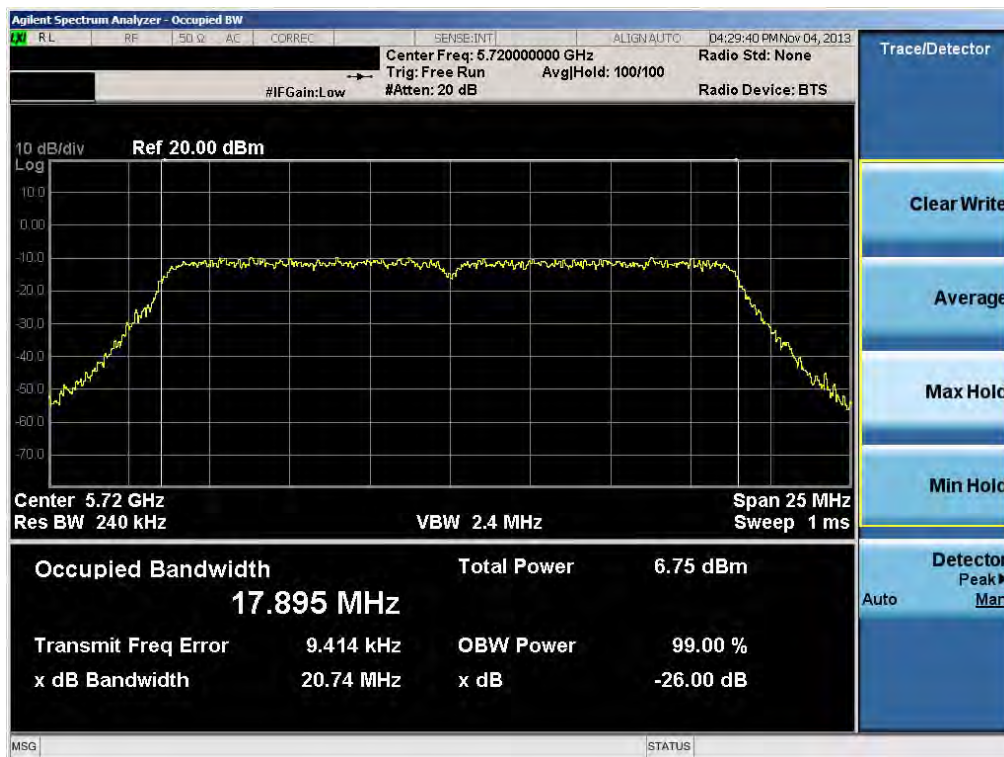

Plot 6-24. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 144)

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 25 of 95

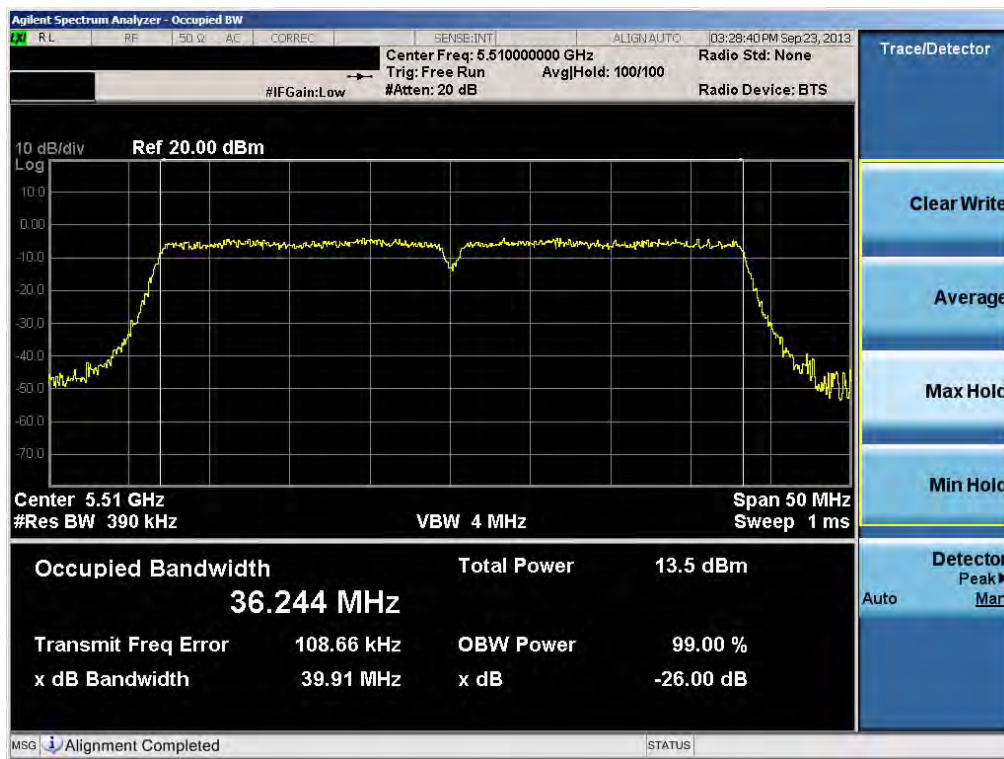


Plot 6-25. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 102)



Plot 6-26. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 110)

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 26 of 95

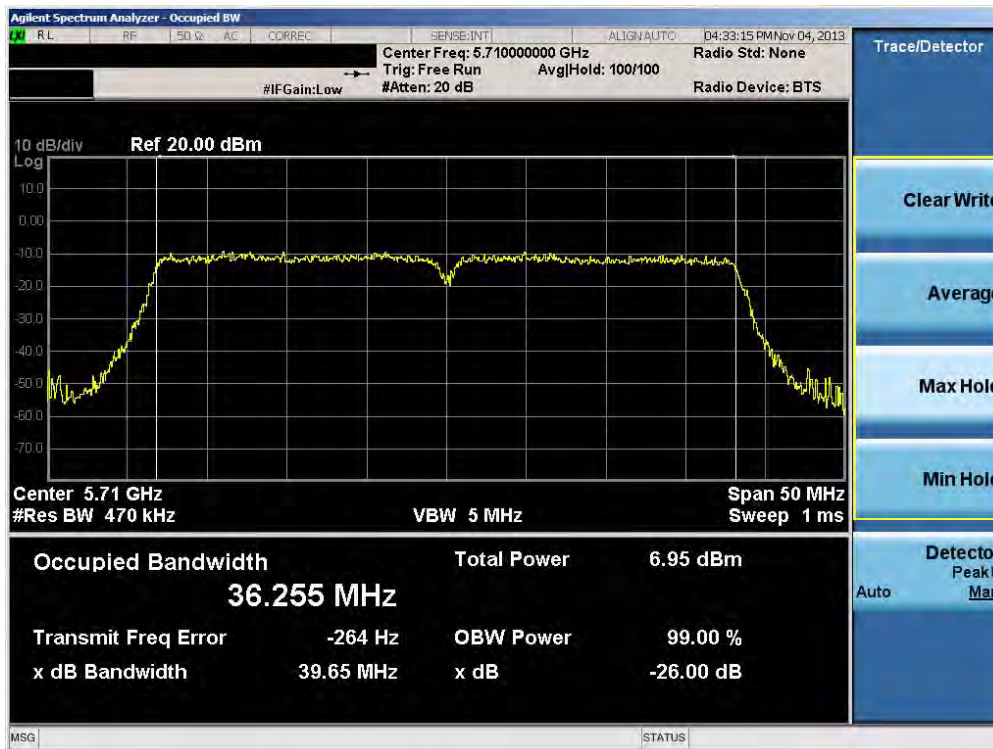

Plot 6-27. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 142)




Plot 6-28. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 3) – Ch. 106)

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 27 of 95




Plot 6-29. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 3) – Ch. 138)

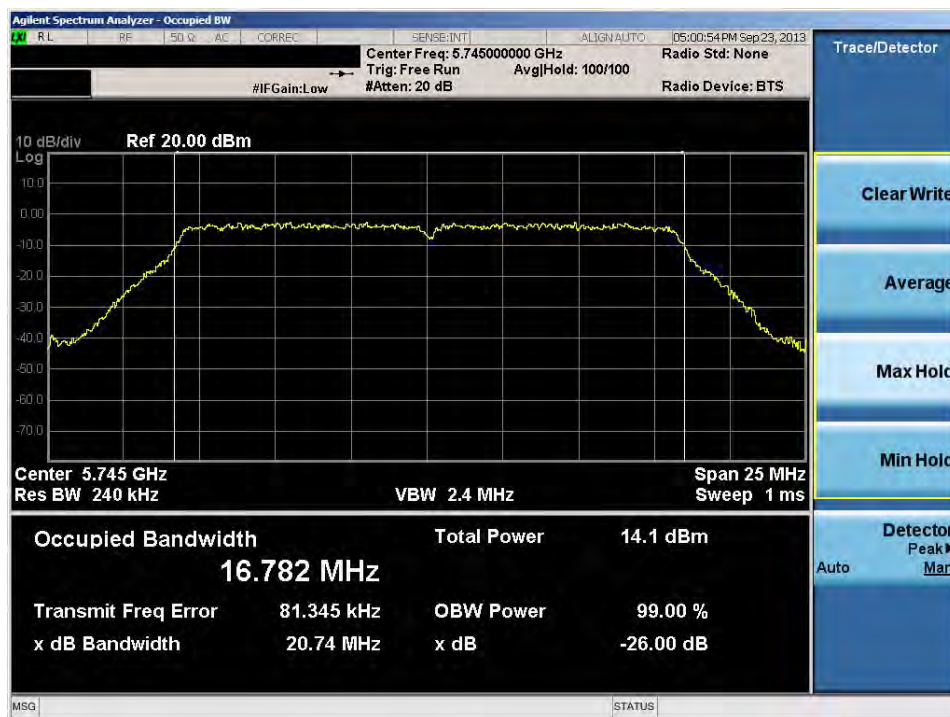


Plot 6-30. 26dB Bandwidth Plot (20MHz BW 802.11a (UNII Band 4) – Ch. 149)

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 28 of 95

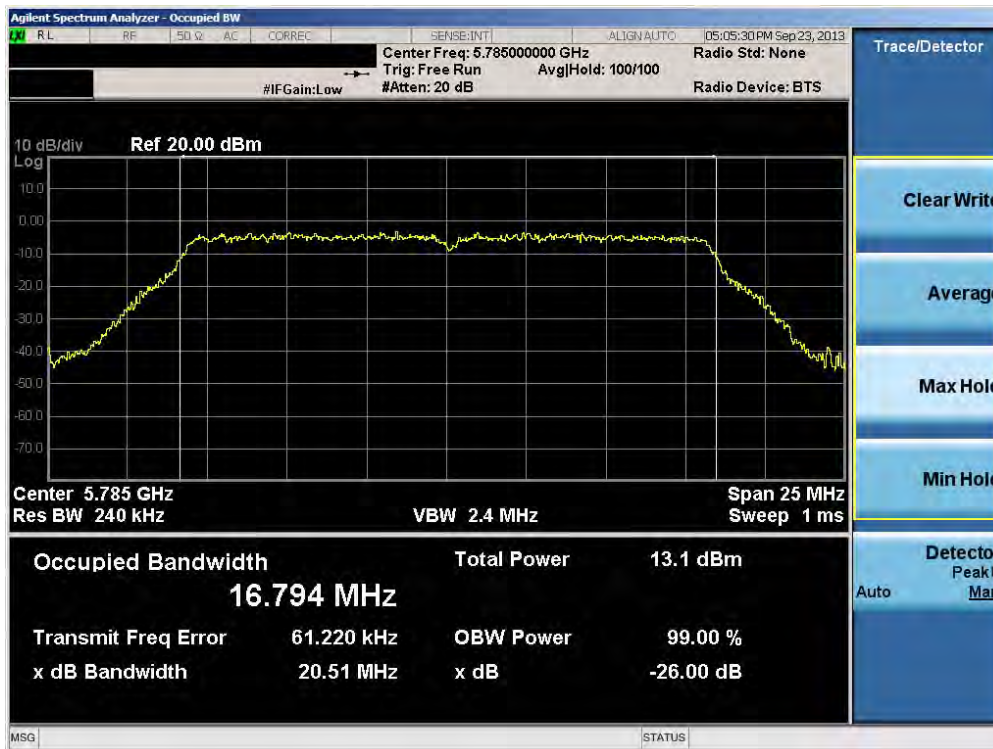

Plot 6-31. 26dB Bandwidth Plot (20MHz BW 802.11a (UNII Band 4) – Ch. 157)

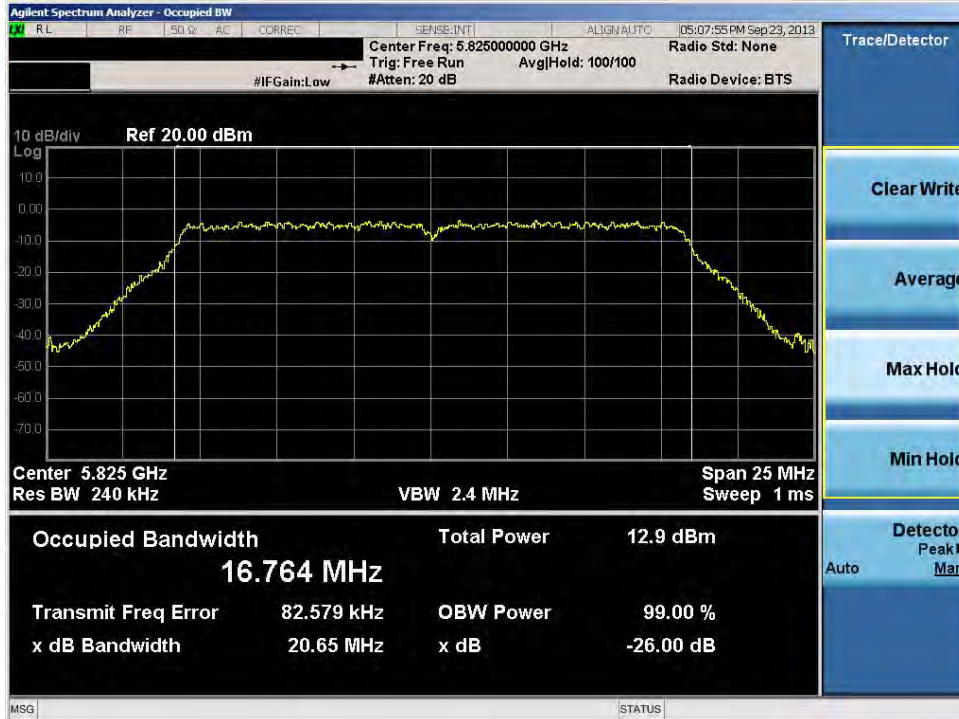


Plot 6-32. 26dB Bandwidth Plot (20MHz BW 802.11a (UNII Band 4) – Ch. 165)

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 29 of 95




Plot 6-33. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 4) – Ch. 149)

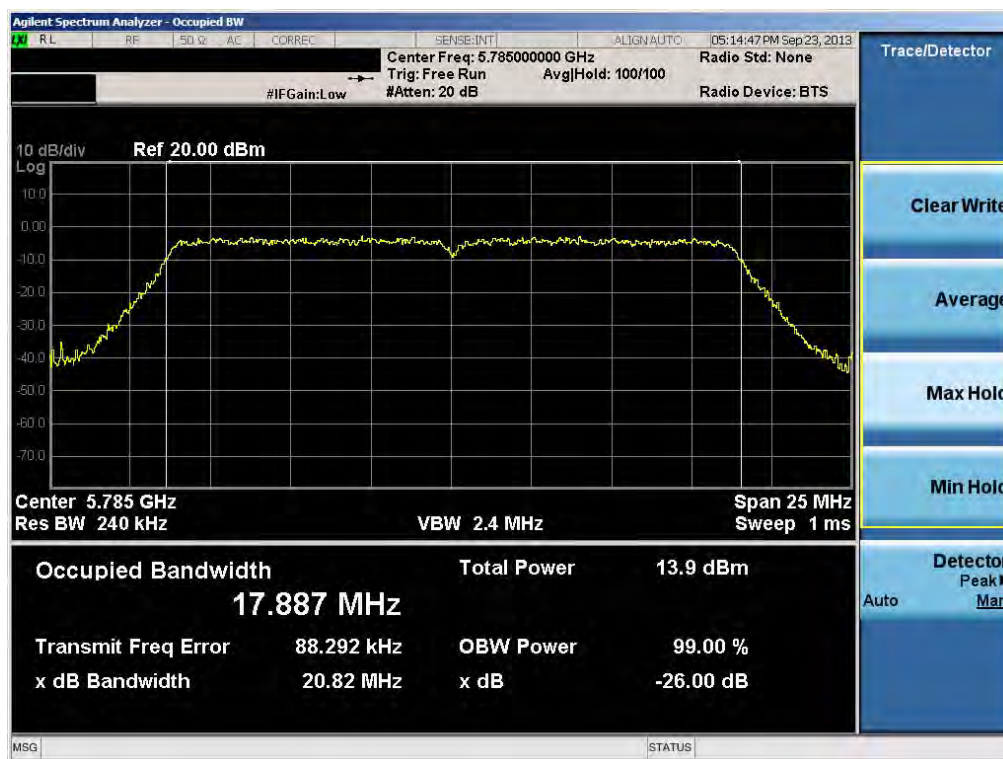


Plot 6-34. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 4) – Ch. 157)

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 30 of 95

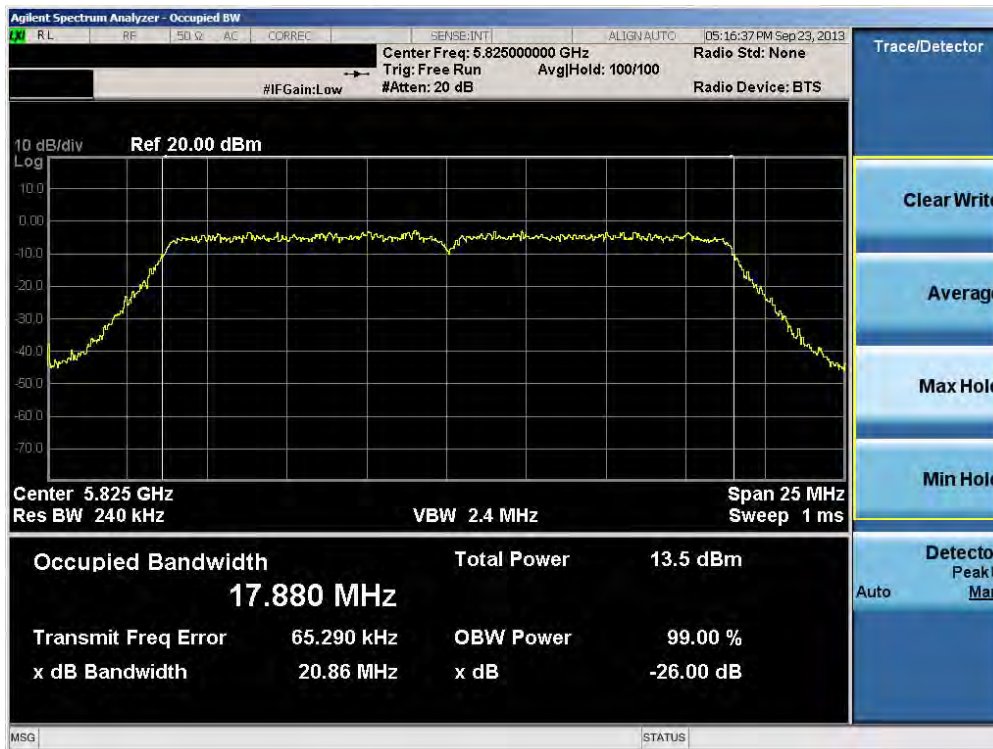


Plot 6-35. 26dB Bandwidth Plot (20MHz BW 802.11n (UNII Band 4) – Ch. 165)

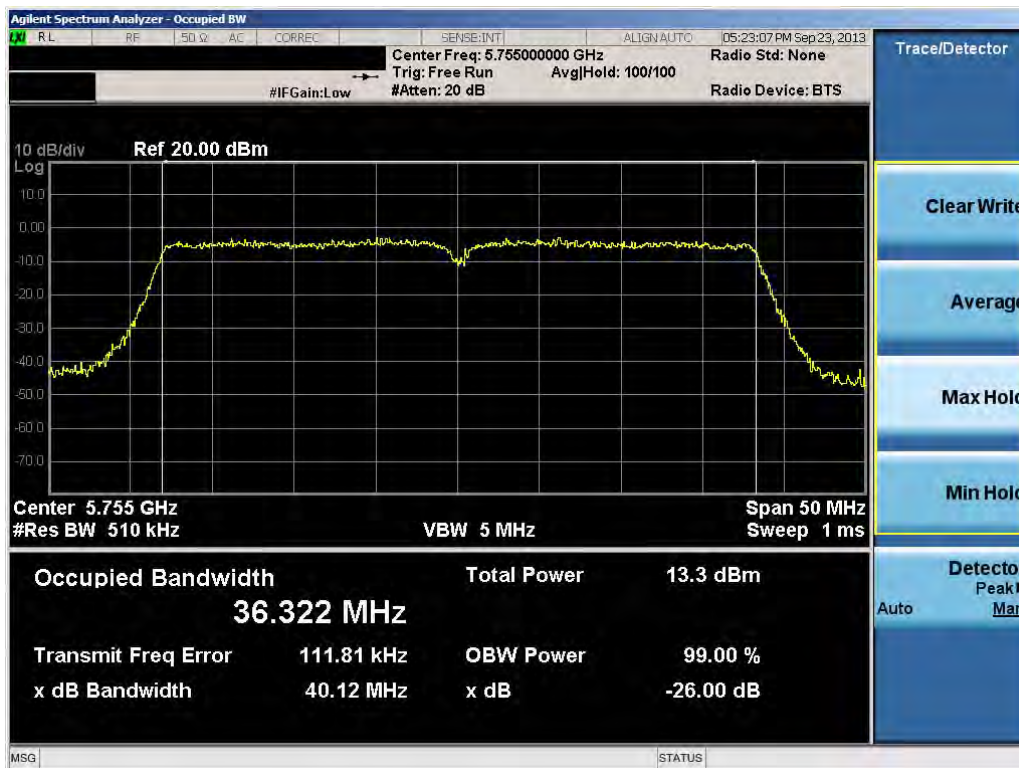

Plot 6-36. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 4) – Ch. 151)

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 31 of 95

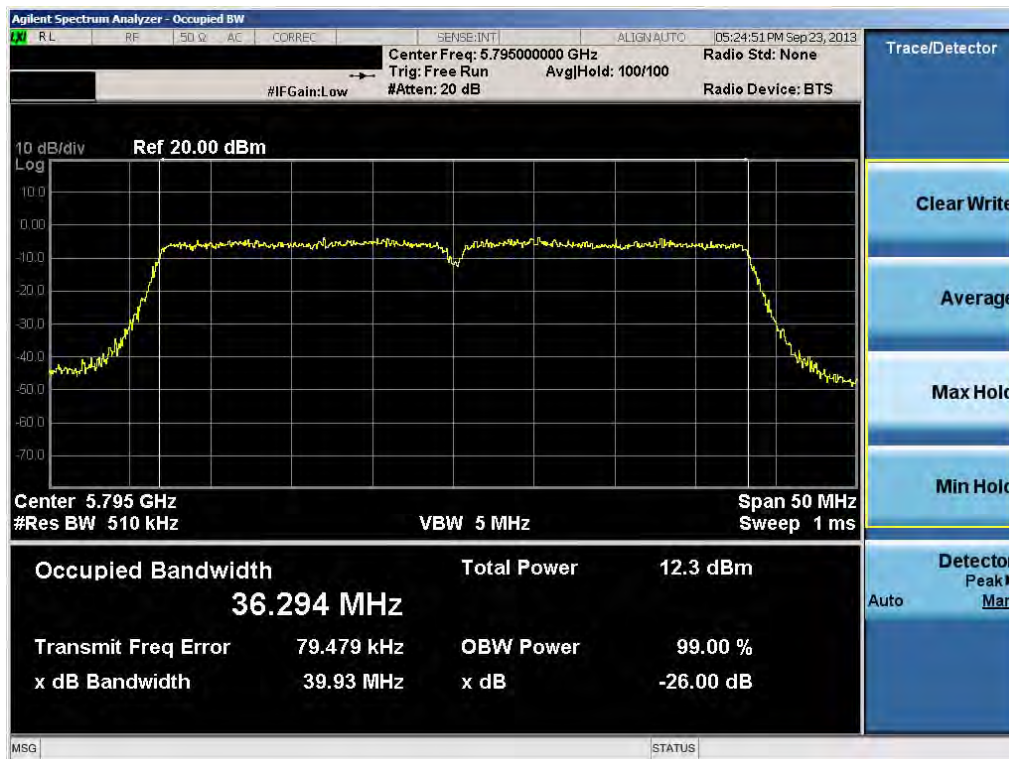


Plot 6-37. 26dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 4) – Ch. 159)




Plot 6-38. 26dB Bandwidth Plot (80MHz BW 802.11ac (UNII Band 4) – Ch. 155)

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 32 of 95

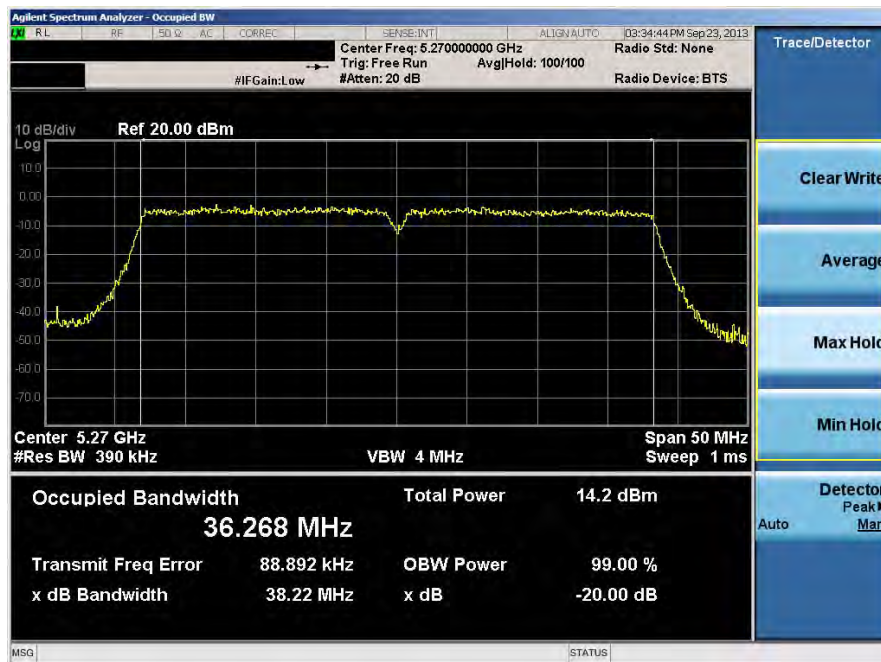

Plot 6-39. 20dB Bandwidth Plot (40MHz BW 802.11n (UNII Band 2) – Ch. 54)


Note: The 20dB bandwidth plot of the UNII Band 2 low channel was found to be within 40MHz and is, therefore, operating solely within the UNII Band 2 frequencies as per KDB 644545 v01r01.

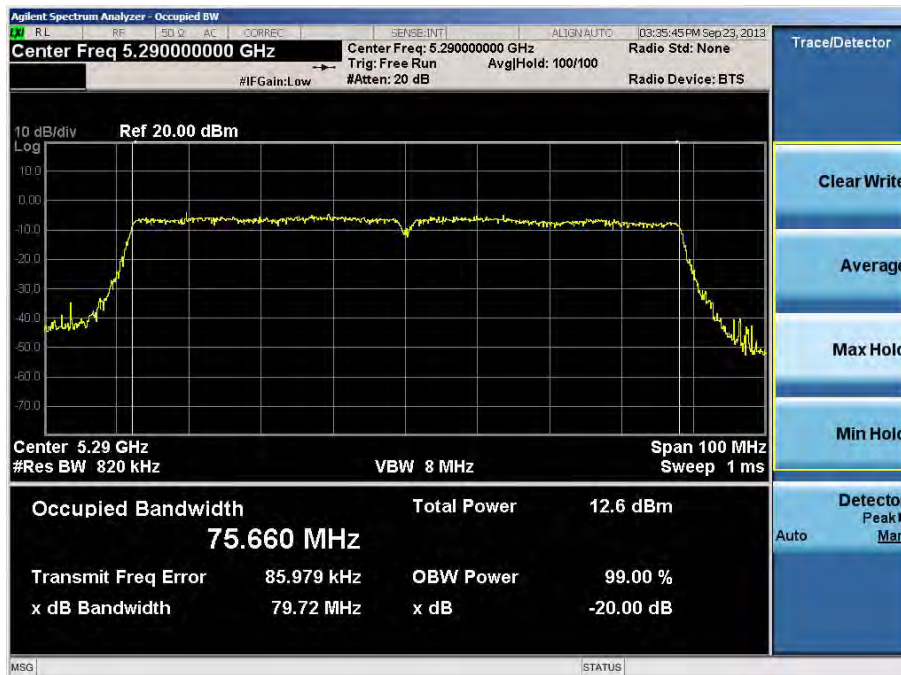

Plot 6-40 A. 20dB Bandwidth Plot (80MHz BW 802.11n (UNII Band 2) – Ch. 58)

Note: The 20dB bandwidth plot of the UNII Band 2 low channel was found to be within 80MHz and is, therefore, operating solely within the UNII Band 2 frequencies as per KDB 644545 v01r01.

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 33 of 95

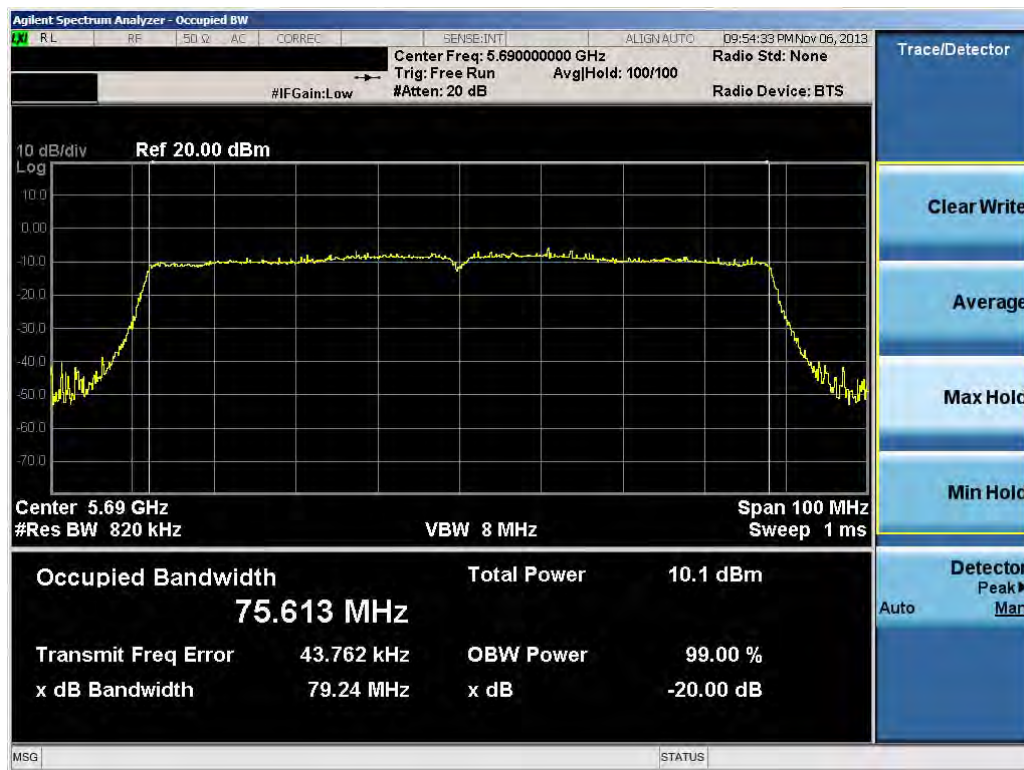

Plot 6-40 B. 20dB Bandwidth Plot (80MHz BW 802.11n (UNII Band 2) – Ch. 138)

Note: The 20dB bandwidth plot of the UNII Band 3 high channel was found to be within 80MHz and is, therefore, operating solely within the UNII Band 3 frequencies as per KDB 644545 v01r01.

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 34 of 95

6.3 UNII Output Power Measurement – 802.11a/n/ac

§15.407 (a)(1); RSS-210 [A9.2]

Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033, and at the appropriate frequencies.

In the 5.15 – 5.25GHz band, the maximum permissible conducted output power is the lesser of 50mW (16.99dBm) and $4 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 4 \text{ dBm} + 10\log_{10}(20.34) = 17.08\text{dBm}$.

In the 5.25 – 5.35GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) and $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(20.41) = 24.1\text{dBm}$.

In the 5.47 – 5.725GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) and $11 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 11 \text{ dBm} + 10\log_{10}(20.14) = 24.04\text{dBm}$.

In the 5.725 – 5.825GHz band, the maximum permissible conducted output power is the lesser of 1000mW (30dBm) and $17 \text{ dBm} + 10\log_{10}(26\text{dB BW}) = 17 \text{ dBm} + 10\log_{10}(20.51) = 30.12\text{dBm}$.

Test Procedure Used

KDB 789033 v01r03 – Section E)3)b) Method PM-G
KDB 644545 D02 v01

Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

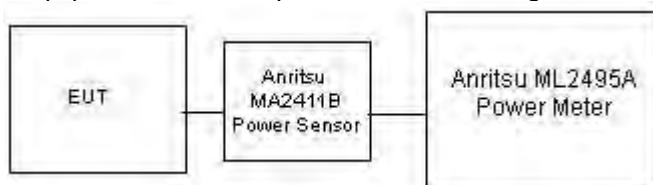


Figure 6-2. Test Instrument & Measurement Setup

Test Notes

In the conducted power tables below, channels that straddle the upper UNII-3 and UNII-4 Band Edge at 5725MHz were evaluated in accordance with requirements of KDB 644545 D01 Section F(3). Accordingly, the power for the portion of the emission occurring within each UNII Band must comply with that particular power limit (i.e. UNII-3 = 250mW, UNII-4 = 1Watt). The powers shown in the tables that follow are the powers for the entire channel bandwidth. It is confirmed that the maximum conducted output power of the entire signal complies with the limits of the respective Band of operation. Therefore the portion of the signal within each band also complies with the limits for that band. Thus those channels comply with Part 15.407(a).

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 35 of 95

Mode	Freq [MHz]	Channel	Detector	802.11a Conducted Power [dBm]							
				Data Rate [Mbps]							
				6	9	12	18	24	36	48	54
802.11a	5180	36	AVG	10.05	10.24	10.02	10.10	10.15	10.17	10.23	10.09
802.11a	5200	40	AVG	10.16	10.06	10.25	10.07	10.25	10.03	10.24	10.00
802.11a	5220	44	AVG	10.28	10.24	10.25	10.17	10.15	10.05	10.28	10.16
802.11a	5240	48	AVG	10.07	10.07	10.22	10.08	10.01	10.03	10.21	10.06
802.11a	5260	52	AVG	10.28	10.39	10.45	10.38	10.47	10.36	10.51	10.26
802.11a	5280	56	AVG	10.31	10.30	10.31	10.16	10.27	10.15	10.35	10.22
802.11a	5300	60	AVG	10.17	10.18	10.28	10.20	10.21	10.09	10.23	10.05
802.11a	5320	64	AVG	10.05	10.19	10.23	10.13	10.12	10.06	10.33	10.16
802.11a	5500	100	AVG	10.11	10.01	10.08	10.01	9.99	10.04	10.15	9.92
802.11a	5520	104	AVG	10.06	9.82	10.01	9.91	10.04	9.77	10.01	10.22
802.11a	5540	108	AVG	10.09	9.85	9.94	9.87	9.91	9.90	9.81	9.86
802.11a	5560	112	AVG	9.93	9.74	9.77	9.67	9.82	9.78	9.98	9.68
802.11a	5580	116	AVG	9.45	9.58	9.86	9.64	9.92	9.63	9.82	9.64
802.11a	5660	132	AVG	9.20	9.47	9.53	9.39	9.48	9.29	9.61	9.89
802.11a	5680	136	AVG	9.17	9.38	9.48	9.25	9.32	9.31	9.47	9.46
802.11a	5700	140	AVG	9.54	9.30	9.41	9.26	9.28	9.22	9.95	9.32
802.11a	5720	144	AVG	9.39	9.33	9.49	9.70	9.41	9.16	9.39	9.68
802.11a	5745	149	AVG	9.47	9.53	9.51	9.44	9.41	9.40	9.71	9.30
802.11a	5765	153	AVG	9.30	9.30	9.31	9.30	9.32	9.42	9.41	9.14
802.11a	5785	157	AVG	9.24	9.20	9.25	9.43	9.30	9.15	9.35	9.19
802.11a	5805	161	AVG	9.30	9.40	9.41	9.42	9.16	9.22	8.88	9.18
802.11a	5825	165	AVG	8.91	8.96	8.95	9.12	9.09	9.05	9.22	8.80

Table 6-3. 802.11a (UNII) Maximum Conducted Output Power

Mode	Freq [MHz]	Channel	Detector	20MHz BW 802.11n (5GHz) Conducted Power [dBm]							
				Data Rate [Mbps]							
				6.5/7.2	13/14.4	19.5/21.7	26/28.9	39/43.4	52/57.8	58.5/65	65/72.2
802.11n	5180	36	AVG	9.79	9.98	9.68	9.93	9.60	9.92	9.87	9.86
802.11n	5200	40	AVG	9.84	9.77	9.65	9.93	9.66	9.88	9.76	9.13
802.11n	5220	44	AVG	9.35	9.34	9.28	9.23	9.49	9.72	9.77	9.84
802.11n	5240	48	AVG	9.79	9.89	9.80	9.25	9.09	9.10	9.42	9.29
802.11n	5260	52	AVG	9.16	9.25	9.27	9.29	9.82	9.79	9.45	9.70
802.11n	5280	56	AVG	9.87	10.03	9.81	9.41	9.26	9.39	9.25	9.20
802.11n	5300	60	AVG	9.49	9.38	9.08	9.32	9.31	9.37	9.38	9.71
802.11n	5320	64	AVG	9.44	9.36	9.29	9.48	9.32	9.32	9.39	9.42
802.11n	5500	100	AVG	9.53	9.64	9.47	9.48	9.55	9.50	9.62	9.49
802.11n	5520	104	AVG	9.60	9.46	9.53	9.52	9.47	9.45	9.28	9.43
802.11n	5540	108	AVG	9.59	9.66	9.77	9.74	9.80	9.76	9.65	9.74
802.11n	5560	112	AVG	9.52	9.25	9.58	9.57	9.47	9.43	9.50	9.48
802.11n	5580	116	AVG	9.44	9.38	9.38	9.38	9.43	9.57	9.35	9.40
802.11n	5660	132	AVG	9.18	9.18	9.04	9.18	9.15	8.95	9.04	9.12
802.11n	5680	136	AVG	9.00	9.02	9.14	9.00	9.13	9.12	9.22	9.08
802.11n	5700	140	AVG	9.26	9.22	9.24	9.24	9.24	9.09	9.25	9.14
802.11n	5720	144	AVG	9.22	9.16	9.16	9.15	9.12	9.02	9.07	9.05
802.11n	5745	149	AVG	9.23	9.35	9.09	9.08	9.23	9.29	9.16	9.21
802.11n	5765	153	AVG	9.11	9.13	9.01	9.01	8.97	9.02	8.95	9.01
802.11n	5785	157	AVG	9.12	9.00	9.05	9.20	9.11	9.05	8.91	8.80
802.11n	5805	161	AVG	9.15	9.20	9.19	9.17	9.16	9.02	9.09	8.99
802.11n	5825	165	AVG	8.94	8.93	8.90	8.72	8.89	9.03	8.87	8.95

Table 6-4. 20MHz BW 802.11n (UNII) Maximum Conducted Output Power

FCC ID: ZNFD959	 FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION) 		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset	Page 36 of 95

Mode	Freq [MHz]	Channel	Detector	40MHz BW 802.11n (5GHz) Conducted Power [dBm]							
				Data Rate [Mbps]							
				13.5	27	40.5	54	81	108	121.5	135
802.11n	5190	38	AVG	9.59	9.88	9.56	10.04	9.90	9.80	9.54	9.93
802.11n	5230	46	AVG	9.60	9.70	9.89	9.52	9.73	9.89	9.87	9.55
802.11n	5270	54	AVG	10.17	10.06	10.06	10.00	9.80	9.68	9.55	9.55
802.11n	5310	62	AVG	9.57	9.80	9.86	10.16	9.98	9.75	10.17	9.49
802.11n	5510	102	AVG	9.42	9.38	9.46	9.50	9.92	9.45	9.36	9.49
802.11n	5550	110	AVG	9.36	9.35	9.42	9.39	9.61	9.48	9.49	9.79
802.11n	5670	134	AVG	9.10	9.07	9.20	9.30	9.12	9.13	9.00	9.09
802.11n	5710	142	AVG	9.24	9.21	9.13	9.30	9.08	9.53	9.57	9.63
802.11n	5755	151	AVG	8.84	8.72	8.83	9.05	8.91	8.91	8.64	8.68
802.11n	5795	159	AVG	8.86	8.53	8.50	8.91	9.10	9.09	9.11	9.00

Table 6-5. 40MHz BW 802.11n (UNII) Maximum Conducted Output Power

Mode	Freq [MHz]	Channel	20MHz BW 802.11ac (5 GHz) Conducted Power [dBm]
			Data Rate : 6.5 Mbps / MCS0
802.11ac	5180	36	8.82
802.11ac	5200	40	8.80
802.11ac	5240	48	8.75
802.11ac	5260	52	9.13
802.11ac	5280	56	9.03
802.11ac	5320	64	9.00
802.11ac	5500	100	8.88
802.11ac	5580	116	8.64
802.11ac	5700	140	8.26
802.11ac	5720	144	8.69
802.11ac	5745	149	8.37
802.11ac	5785	157	8.80
802.11ac	5825	165	8.11

Table 6-6. 20MHz BW 802.11ac (UNII) Maximum Conducted Output Power

Mode	Freq [MHz]	Channel	40MHz BW 802.11ac (5 GHz) Conducted Power [dBm]
			Data Rate : 6.5 Mbps / MCS0
802.11ac	5190	38	8.39
802.11ac	5230	46	8.78
802.11ac	5270	54	8.73
802.11ac	5310	62	8.95
802.11ac	5510	102	8.53
802.11ac	5550	110	8.67
802.11ac	5670	134	8.62
802.11ac	5710	142	8.63
802.11ac	5755	151	8.00
802.11ac	5795	159	8.33

Table 6-7. 40MHz BW 802.11ac (UNII) Maximum Conducted Output Power

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 37 of 95

Mode	Freq [MHz]	Channel	80MHz BW 802.11ac (5GHz) Conducted Power [dBm]									
			Data Rate [Mbps]									
			29.3	58.5	87.8	117	175.5	234	263.3	292.5	351	390
			MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
802.11ac	5210	42	8.49	8.57	8.57	8.48	8.42	8.46	8.51	8.57	8.58	8.73
802.11ac	5290	58	8.63	8.52	8.79	8.35	8.59	8.49	8.35	8.51	8.53	8.40
802.11ac	5530	106	8.79	8.83	8.71	8.73	8.72	8.74	8.91	8.85	8.67	8.55
802.11ac	5690	138	8.58	8.50	8.47	8.28	8.25	8.39	8.26	8.34	7.84	8.32
802.11ac	5775	155	8.76	8.59	8.17	8.43	8.41	8.62	8.19	8.40	8.22	8.39

Table 6-8. 80MHz BW 802.11ac (UNII) Maximum Conducted Output Power

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 38 of 95

6.4 Peak Power Spectral Density – 802.11a/n/ac

§15.407 (a)(1)(2),(5) / RSS-210 [A9.2]

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 v01r03, and at the appropriate frequencies. Method SA-2, as defined in KDB 789033 v01r03, was used to measure the power spectral density.

Test Procedure Used

KDB 789033 v01r03 – Section F
KDB 644545 D02 v01

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times (\text{span}/\text{RBW})$
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run.
9. Reference level offset = $10 \times \log(1/\text{duty cycle})$ was applied.
 - a. 802.11a/n (20MHz BW): $10 \times \log(1/95.38\%) = 0.20 \text{ dB}$
 - b. 802.11n (40MHz BW): $10 \times \log(1/91.42\%) = 0.38 \text{ dB}$
 - c. 802.11ac (80MHz BW): $10 \times \log(1/83.03\%) = 0.80 \text{ dB}$
10. Trace was averaged over 100 sweeps
11. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

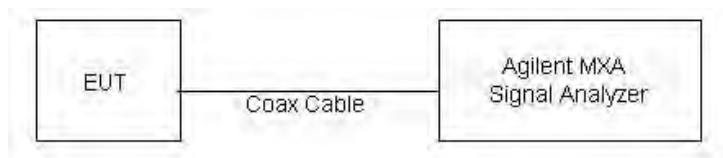


Figure 6-3. Test Instrument & Measurement Setup

Test Notes

None

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 39 of 95

	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density [dBm/MHz]	Margin [dB]
Band I	5180	36	a	6	-3.264	4.0	-7.26
	5200	40	a	6	-3.044	4.0	-7.04
	5240	48	a	6	-2.751	4.0	-6.75
	5180	36	n (20MHz)	6.5/7.2 (MCS0)	-3.480	4.0	-7.48
	5200	40	n (20MHz)	6.5/7.2 (MCS0)	-3.239	4.0	-7.24
	5240	48	n (20MHz)	6.5/7.2 (MCS0)	-3.266	4.0	-7.27
	5190	38	n (40MHz)	13.5/15 (MCS0)	-8.464	4.0	-12.46
	5230	46	n (40MHz)	13.5/15 (MCS0)	-8.255	4.0	-12.26
	5210	42	ac (80MHz)	29.3/32.5 (MCS0)	-11.474	4.0	-15.47
Band II	5260	52	a	6	-2.691	11.0	-13.69
	5280	56	a	6	-2.726	11.0	-13.73
	5320	64	a	6	-3.001	11.0	-14.00
	5260	52	n (20MHz)	6.5/7.2 (MCS0)	-3.305	11.0	-14.31
	5280	56	n (20MHz)	6.5/7.2 (MCS0)	-3.599	11.0	-14.60
	5320	64	n (20MHz)	6.5/7.2 (MCS0)	-3.527	11.0	-14.53
	5270	54	n (40MHz)	13.5/15 (MCS0)	-6.175	11.0	-17.18
	5310	62	n (40MHz)	13.5/15 (MCS0)	-7.014	11.0	-18.01
	5290	58	ac (80MHz)	29.3/32.5 (MCS0)	-11.979	11.0	-22.98
Band III	5500	100	a	6	-3.538	11.0	-14.54
	5580	116	a	6	-3.742	11.0	-14.74
	5720	144	a	6	-7.273	11.0	-18.27
	5500	100	n (20MHz)	6.5/7.2 (MCS0)	-3.969	11.0	-14.97
	5580	116	n (20MHz)	6.5/7.2 (MCS0)	-4.578	11.0	-15.58
	5720	144	n (20MHz)	6.5/7.2 (MCS0)	-7.252	11.0	-18.25
	5510	102	n (40MHz)	13.5/15 (MCS0)	-7.394	11.0	-18.39
	5550	110	n (40MHz)	13.5/15 (MCS0)	-7.292	11.0	-18.29
	5710	142	n (40MHz)	13.5/15 (MCS0)	-9.427	11.0	-20.43
	5530	106	ac (80MHz)	29.3/32.5 (MCS0)	-11.017	11.0	-22.02
	5690	138	ac (80MHz)	29.3/32.5 (MCS0)	-13.48	11.0	-24.48


Table 6-9 a. Conducted Power Spectral Density Measurements

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 40 of 95


	Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density [dBm/MHz]	Margin [dB]
Band IV	5745	149	a	6	-4.192	11.0	-15.19
	5785	157	a	6	-4.627	11.0	-15.63
	5825	165	a	6	-4.819	11.0	-15.82
	5745	149	n (20MHz)	6.5/7.2 (MCS0)	-4.543	11.0	-15.54
	5785	157	n (20MHz)	6.5/7.2 (MCS0)	-4.636	11.0	-15.64
	5825	165	n (20MHz)	6.5/7.2 (MCS0)	-4.721	11.0	-15.72
	5755	151	n (40MHz)	13.5/15 (MCS0)	-7.697	11.0	-18.70
	5795	159	n (40MHz)	13.5/15 (MCS0)	-8.365	11.0	-19.37
	5775	155	ac (80MHz)	29.3/32.5 (MCS0)	-11.161	11.0	-22.16

Table 6-9 b. Conducted Power Spectral Density Measurements

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 41 of 95

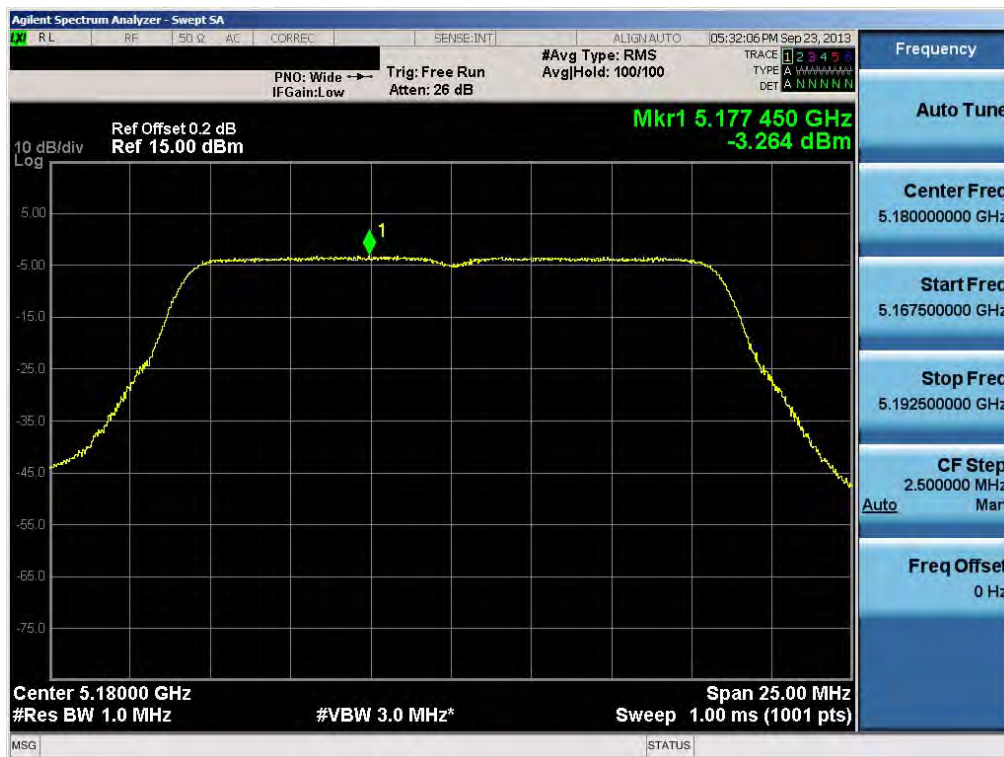


Plot 6-41. Peak Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 36)

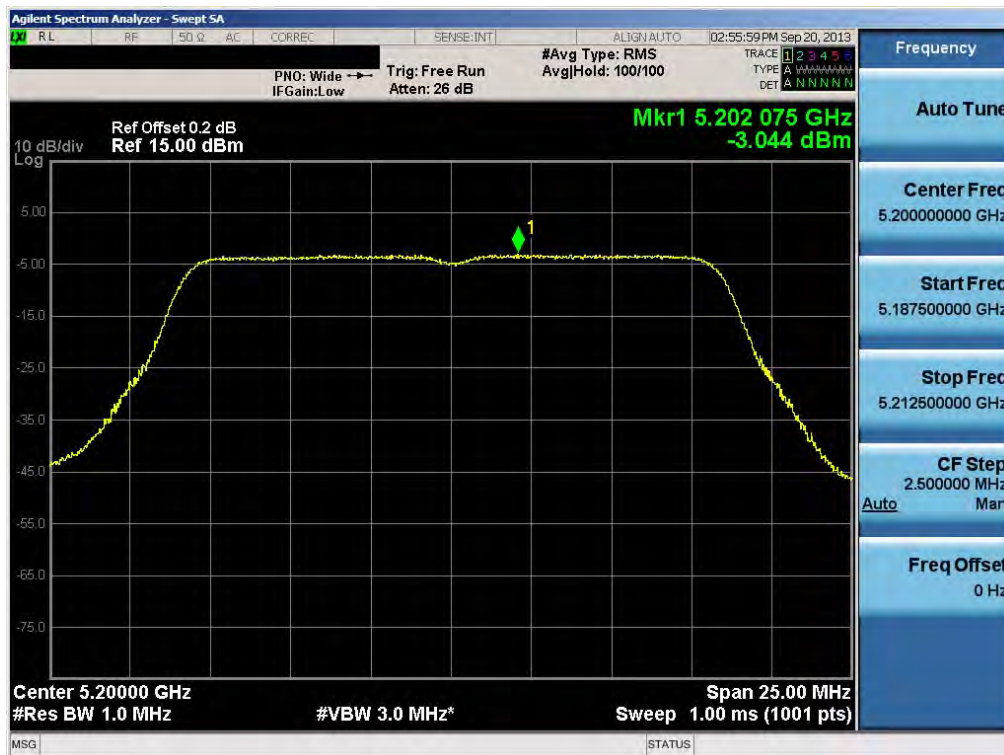


Plot 6-42. Peak Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 40)

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 42 of 95

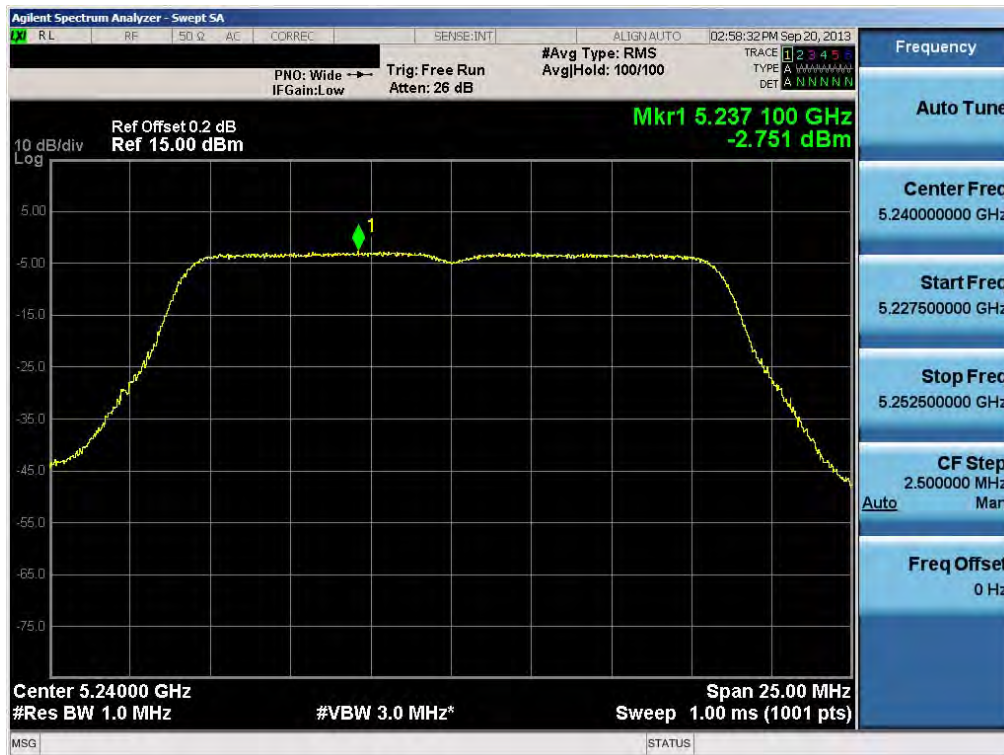


Plot 6-43. Peak Power Spectral Density Plot (802.11a (UNII Band 1) – Ch. 48)

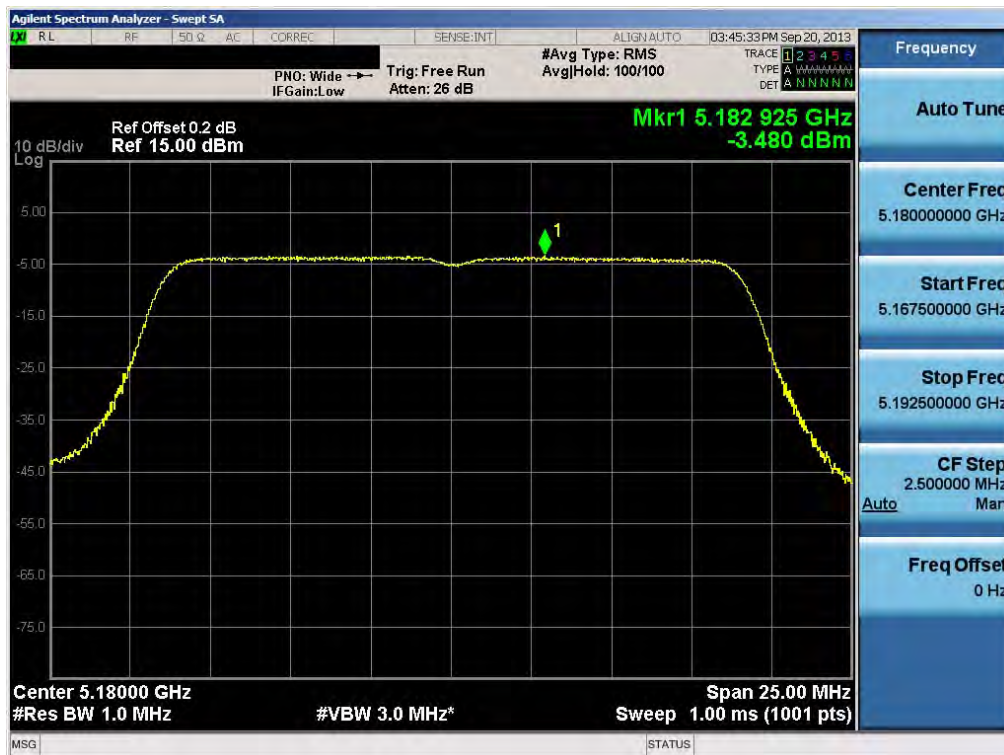

Plot 6-44. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 36)

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 43 of 95

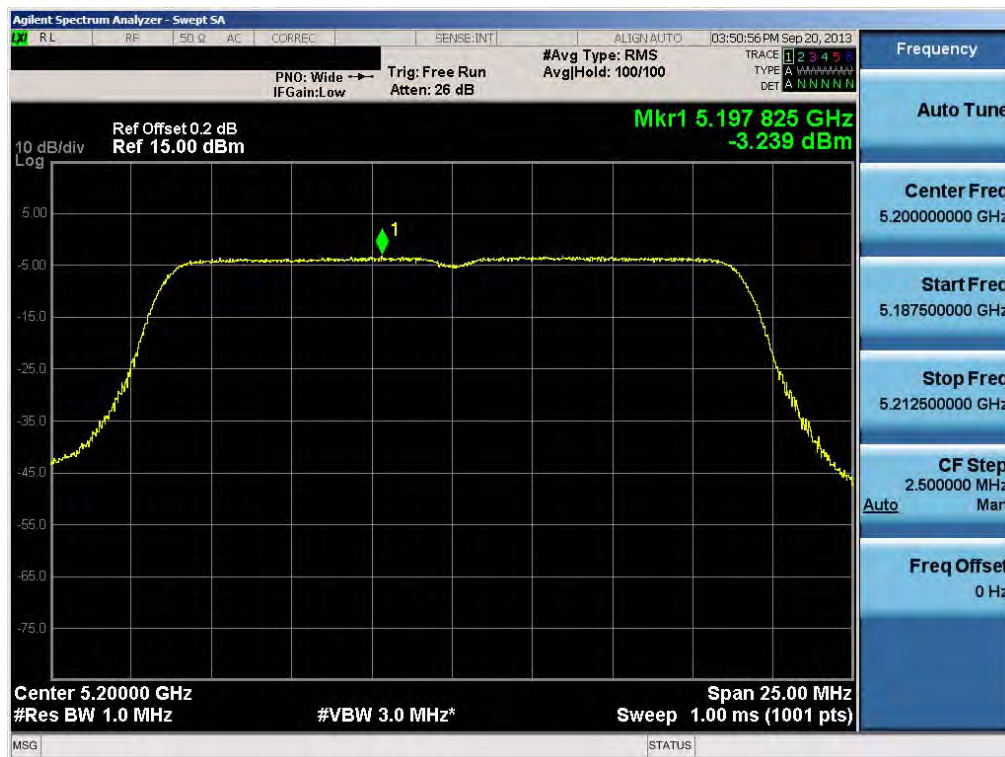


Plot 6-45. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 40)




Plot 6-46. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 1) – Ch. 48)

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 44 of 95

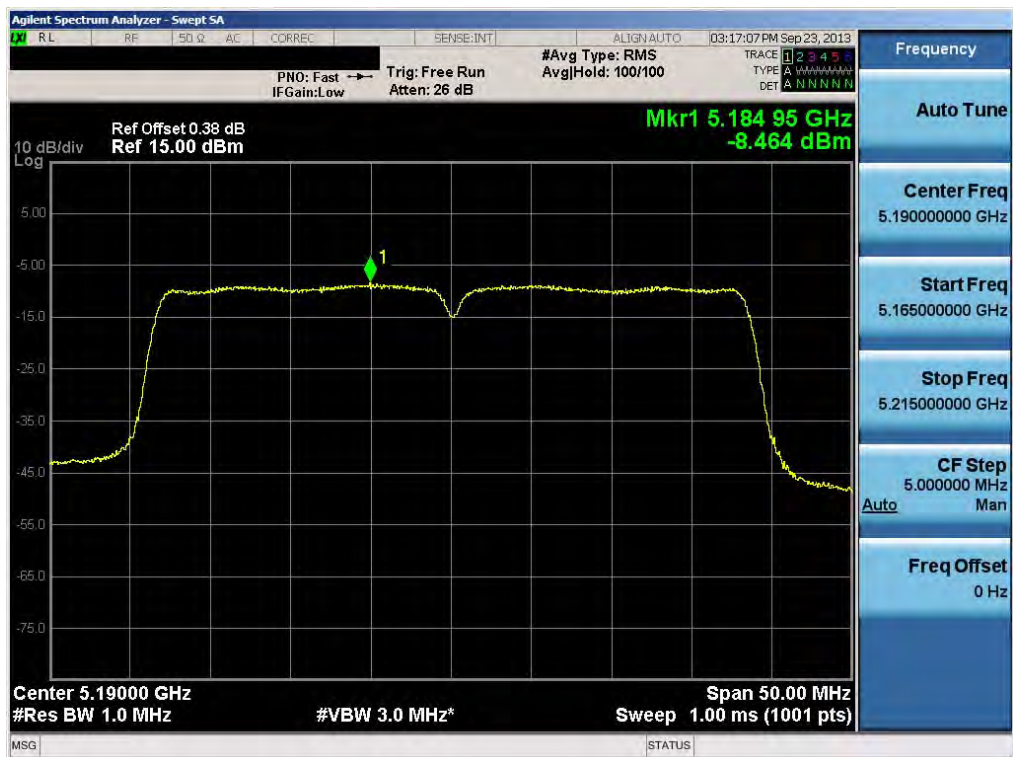


Plot 6-47. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 38)

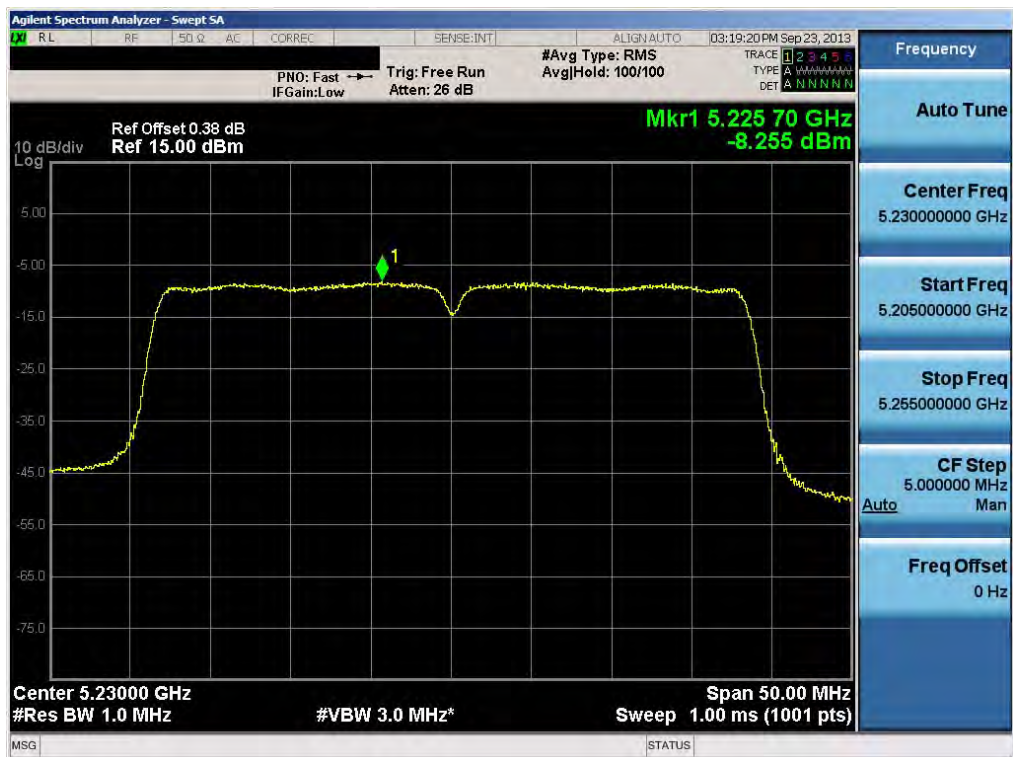


Plot 6-48. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 1) – Ch. 46)

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 45 of 95

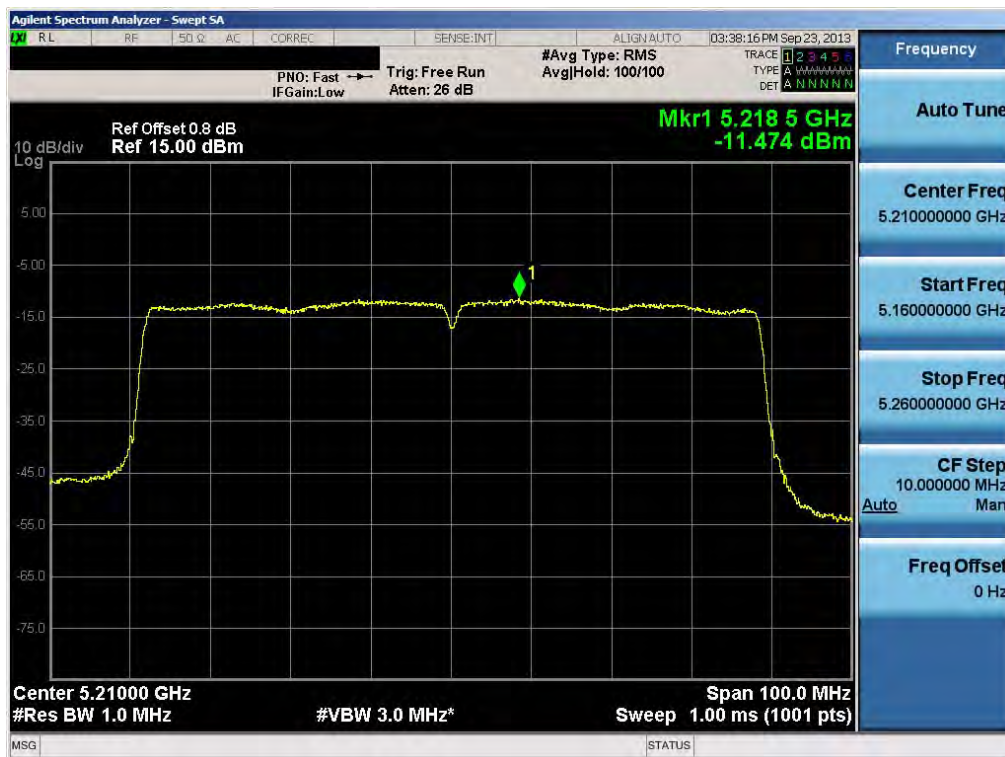


Plot 6-49. Peak Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 1) – Ch. 42)

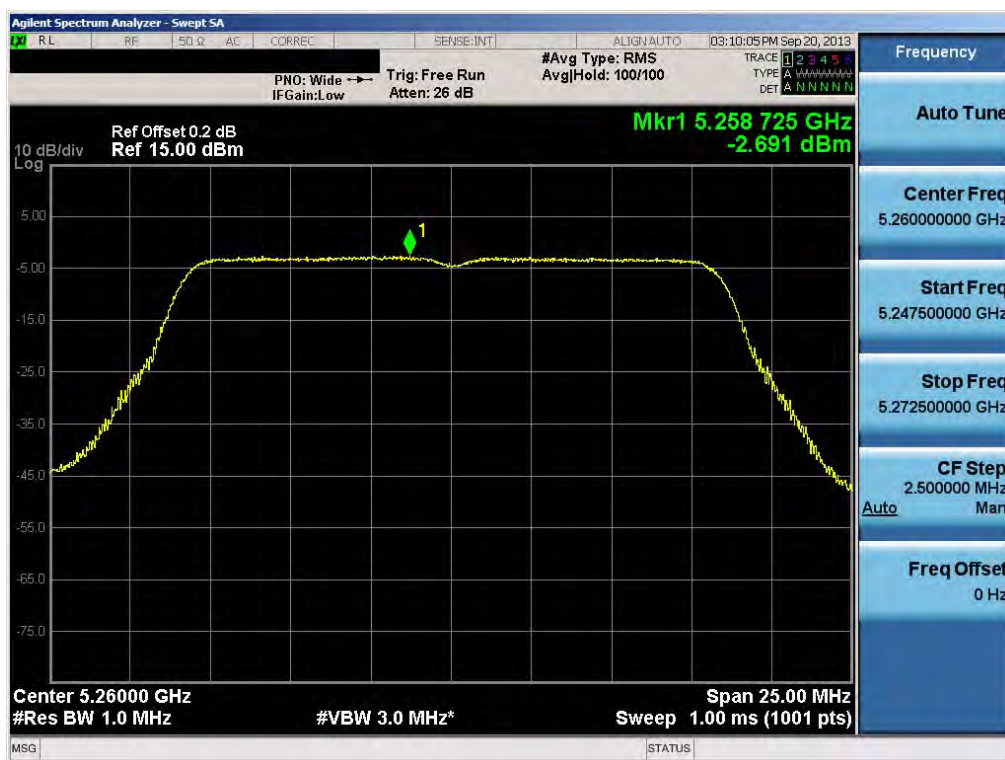

Plot 6-50. Peak Power Spectral Density Plot (802.11a (UNII Band 2) – Ch. 52)

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 46 of 95

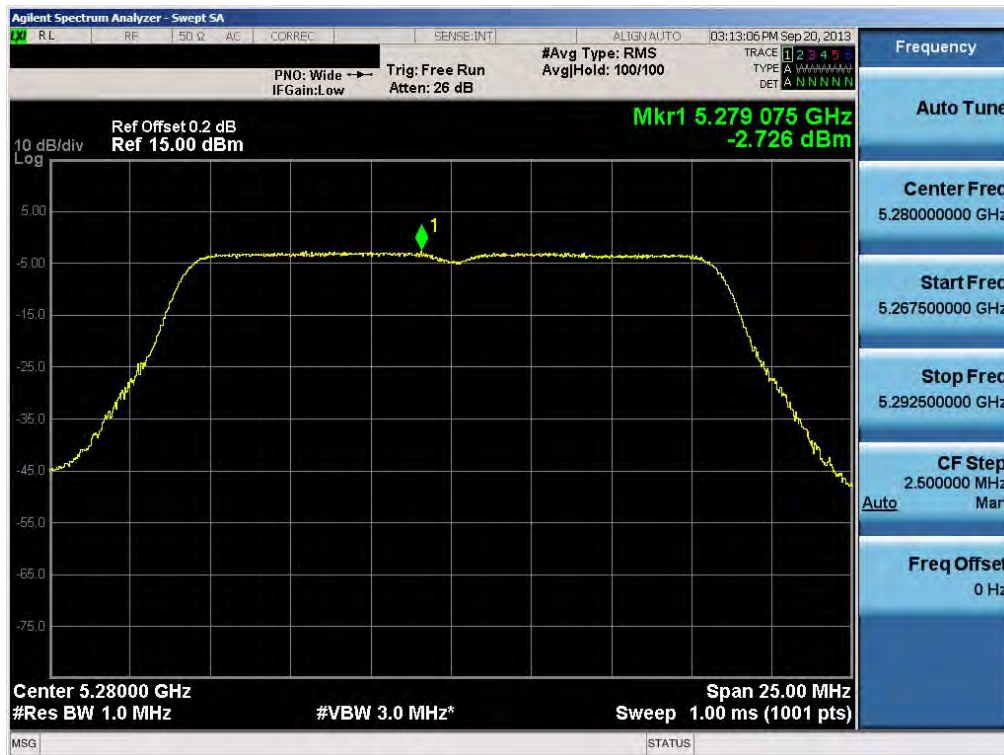


Plot 6-51. Peak Power Spectral Density Plot (802.11a (UNII Band 2) – Ch. 56)




Plot 6-52. Peak Power Spectral Density Plot (802.11a (UNII Band 2) – Ch. 64)

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 47 of 95

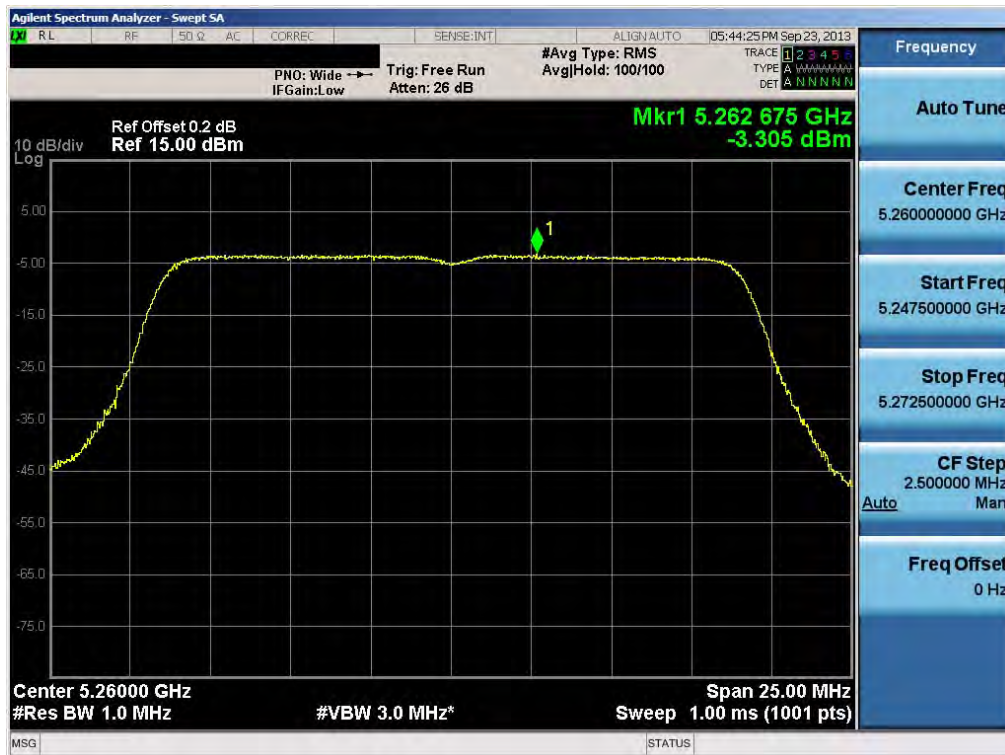


Plot 6-53. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2) – Ch. 52)

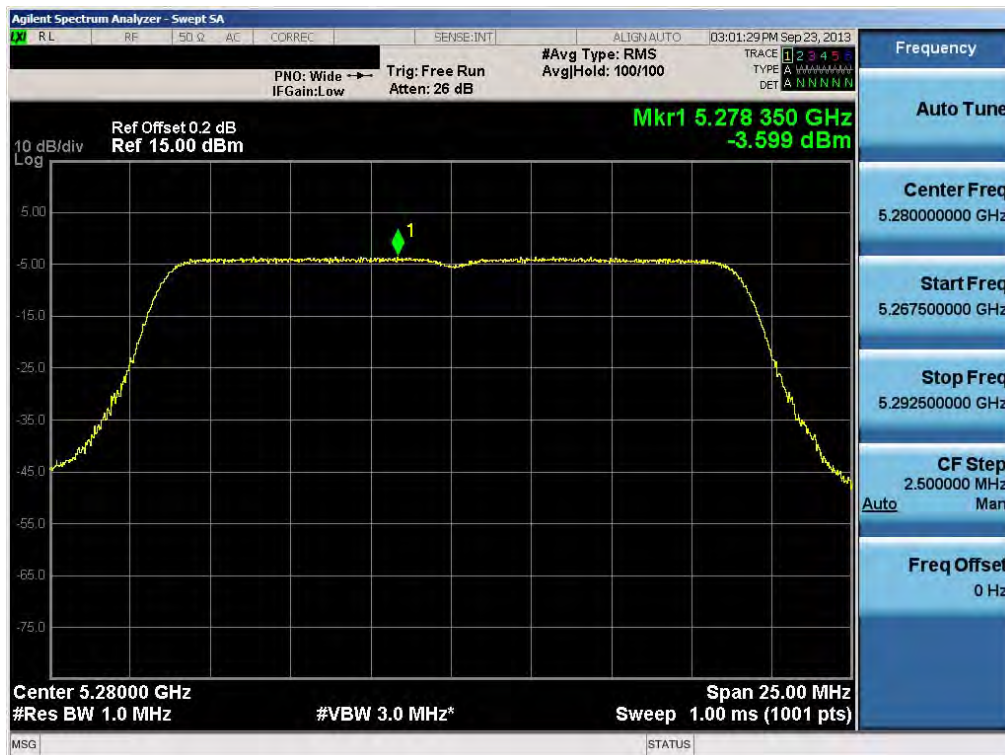

Plot 6-54. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2) – Ch. 56)

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 48 of 95

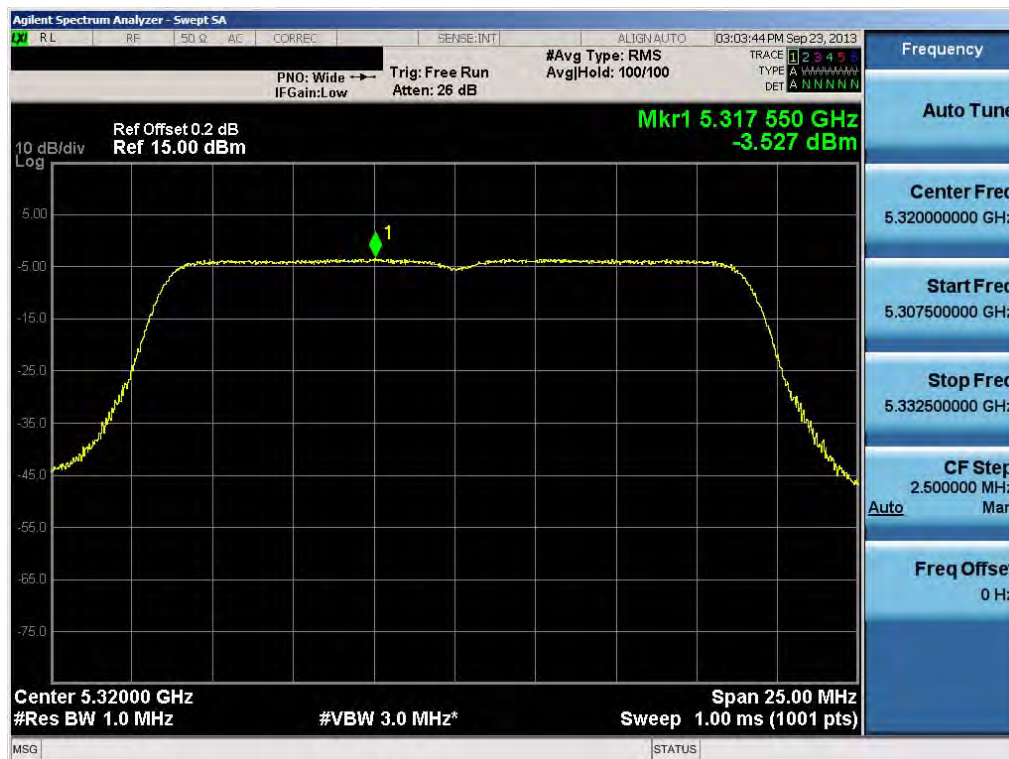


Plot 6-55. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 2) – Ch. 64)



Plot 6-56. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2) – Ch. 54)

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 49 of 95

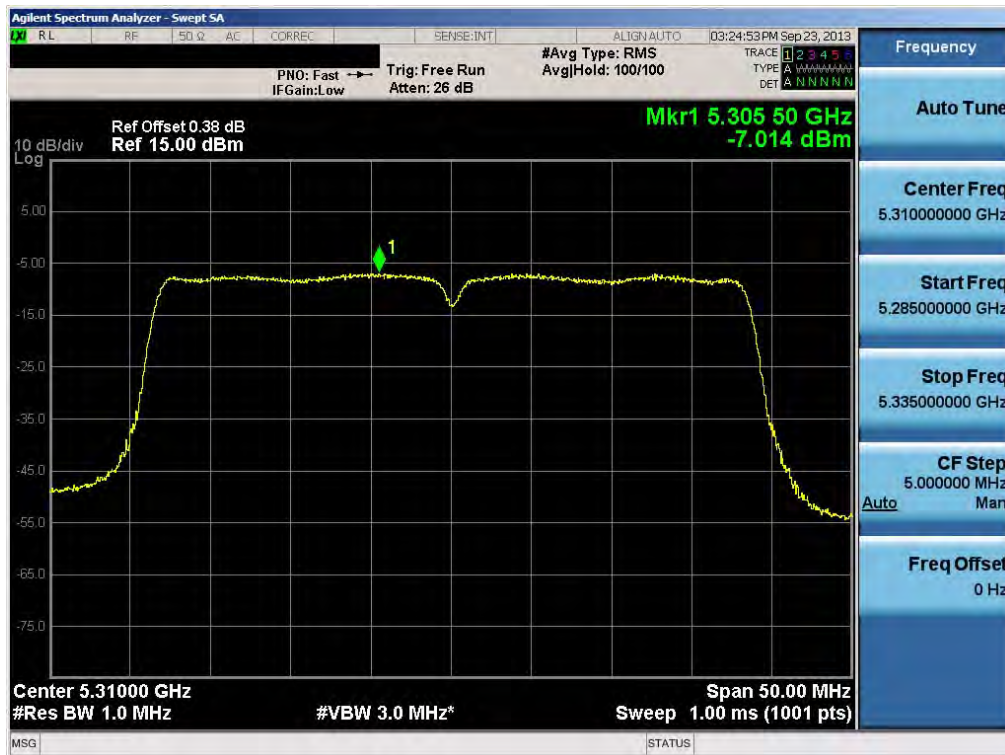


Plot 6-57. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 2) – Ch. 62)




Plot 6-58. Peak Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 2) – Ch. 58)

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 50 of 95

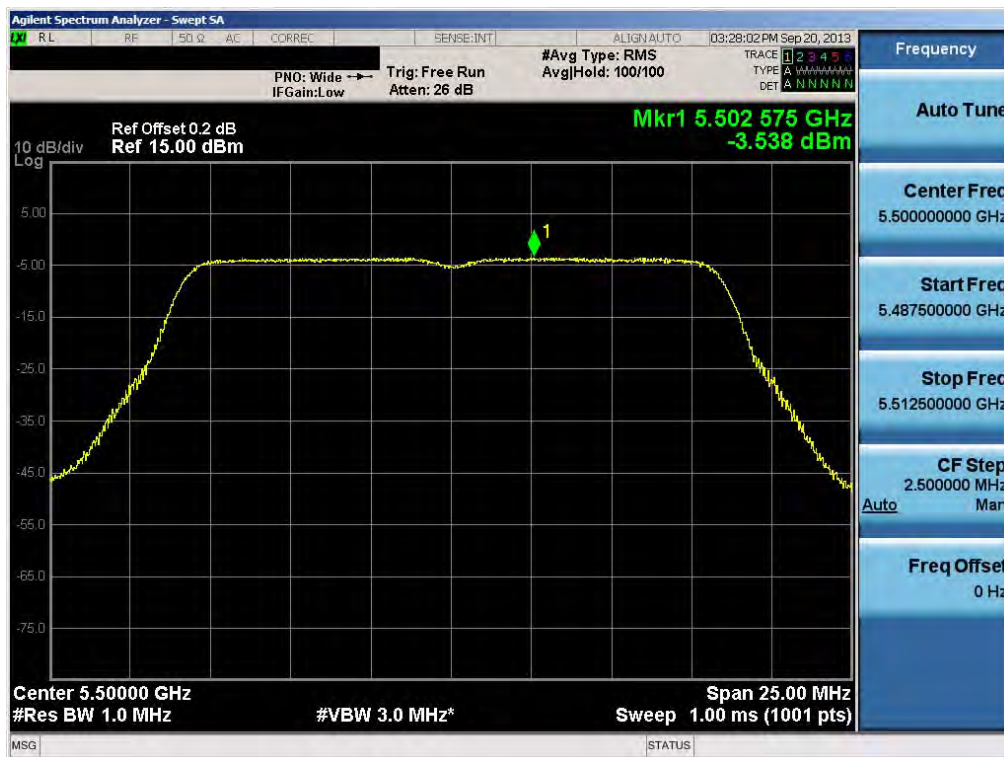

Plot 6-59. Peak Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 100)

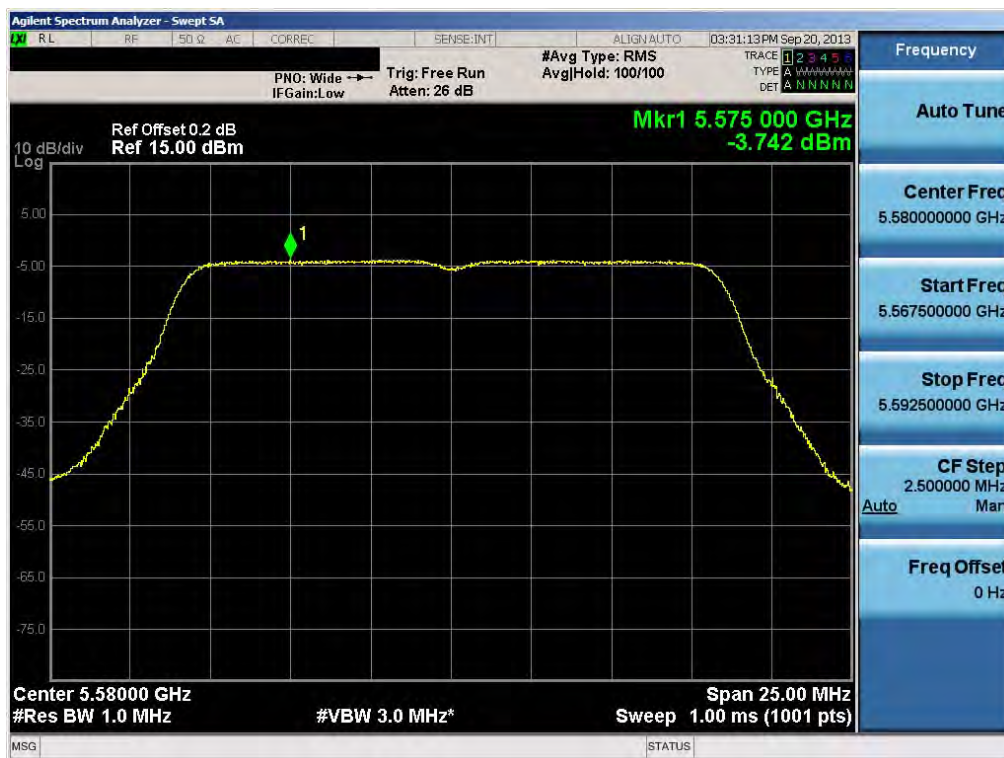


Plot 6-60. Peak Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 116)

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 51 of 95




Plot 6-61. Peak Power Spectral Density Plot (802.11a (UNII Band 3) – Ch. 144)

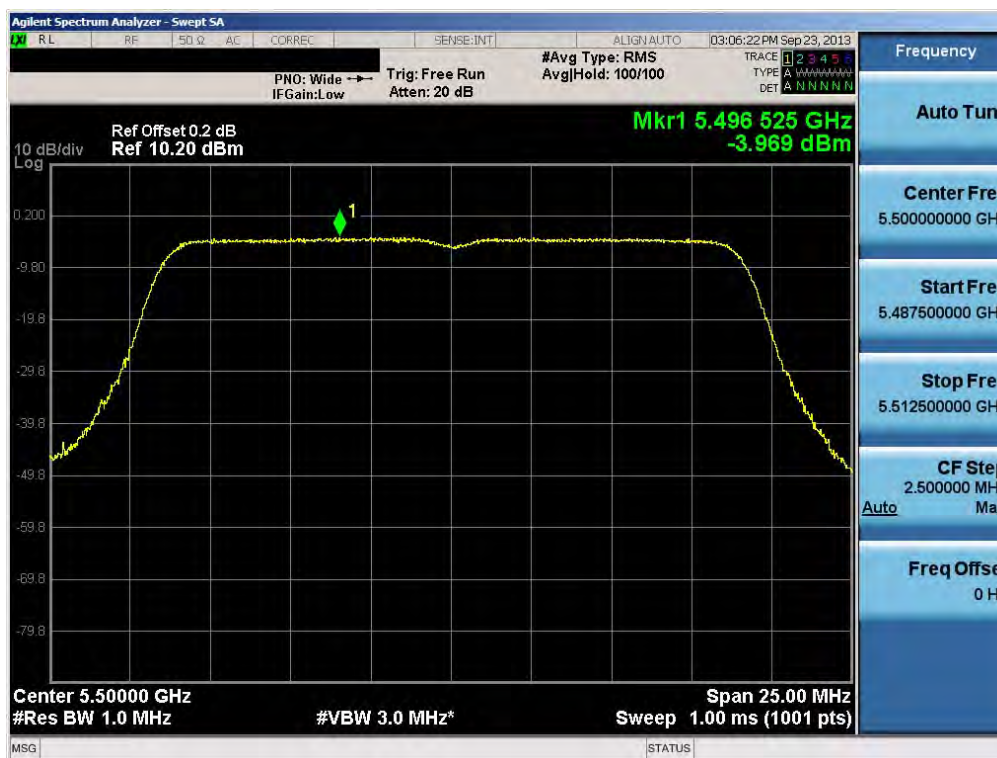


Plot 6-62. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 100)

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 52 of 95

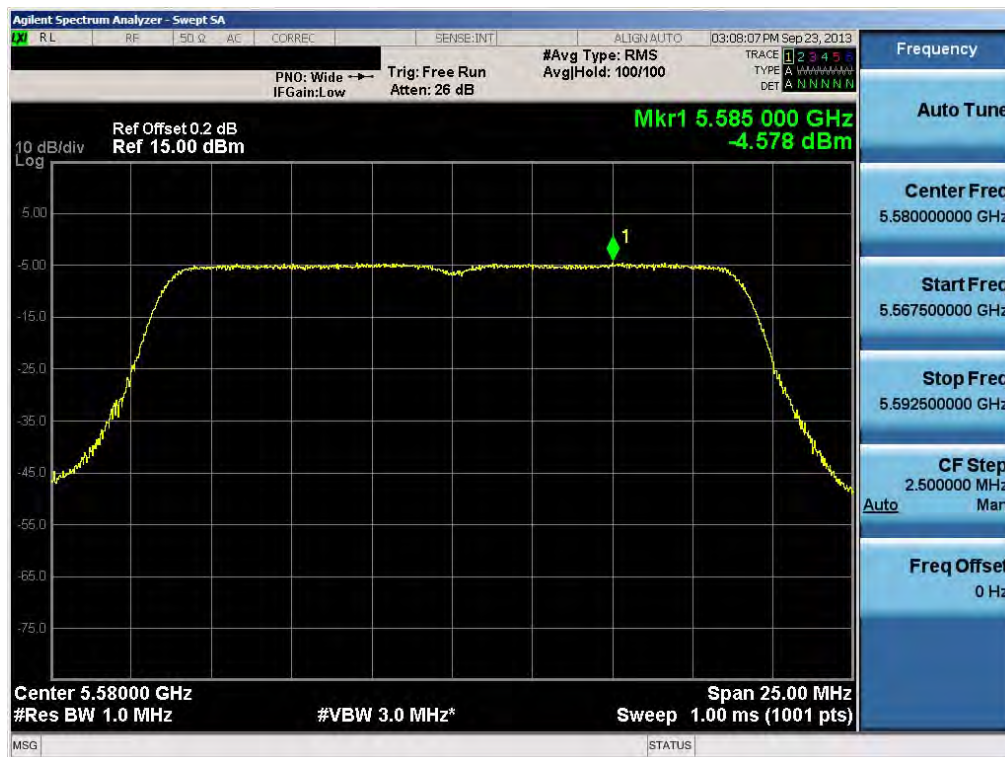


Plot 6-63. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 116)

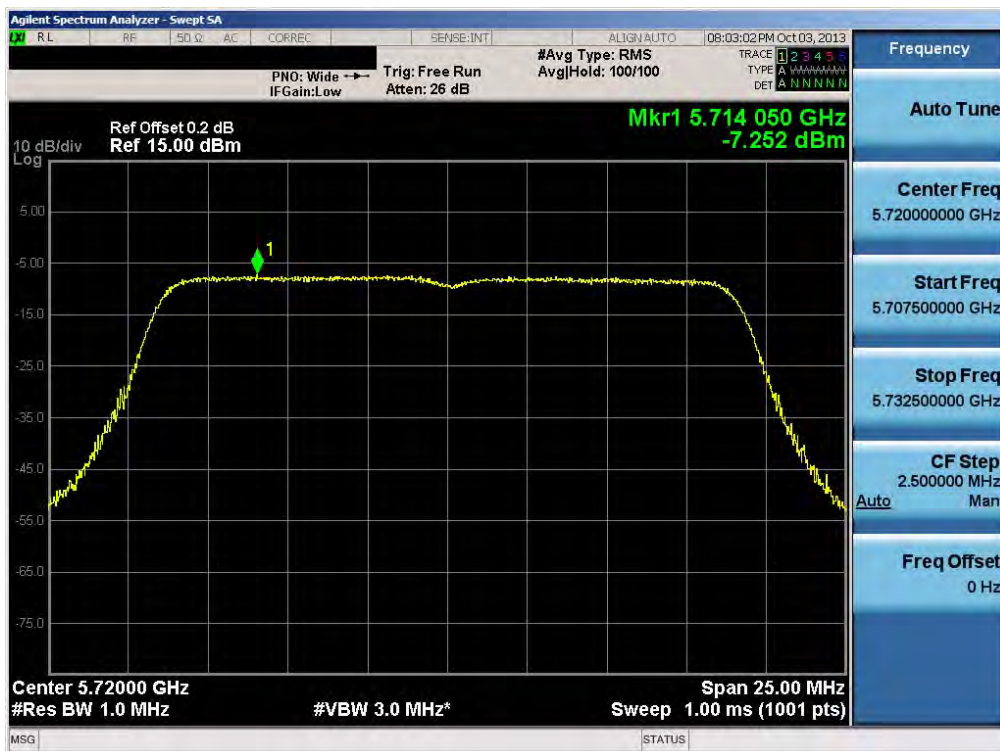

Plot 6-64. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 3) – Ch. 144)

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 53 of 95

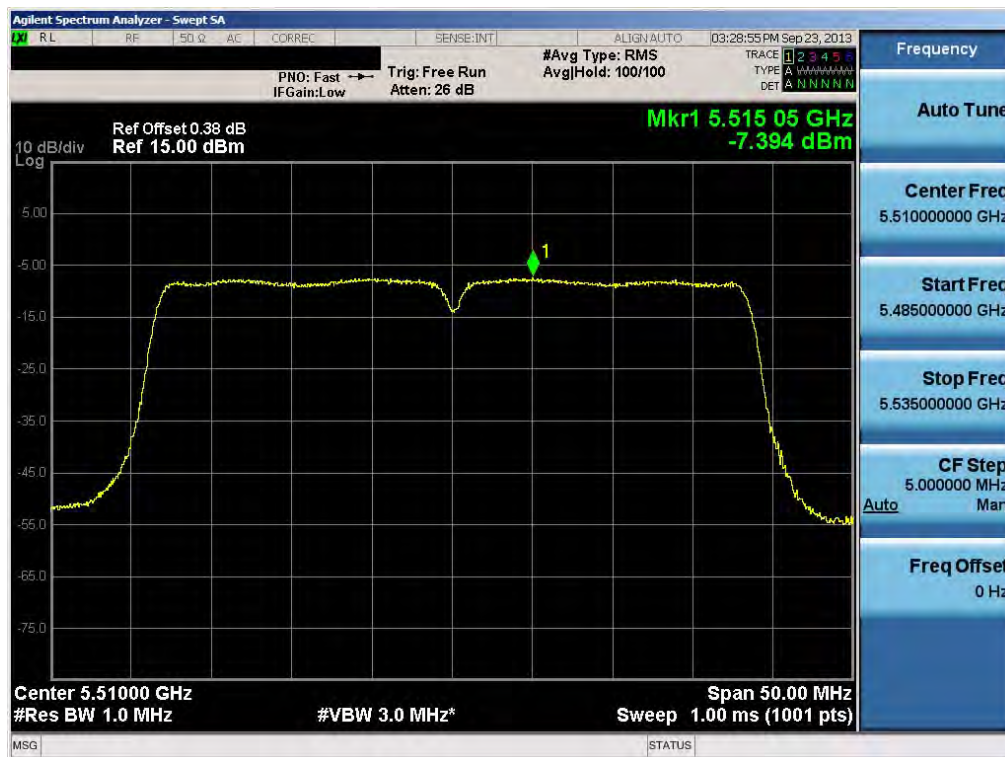


Plot 6-65. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 102)



Plot 6-66. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 110)

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 54 of 95

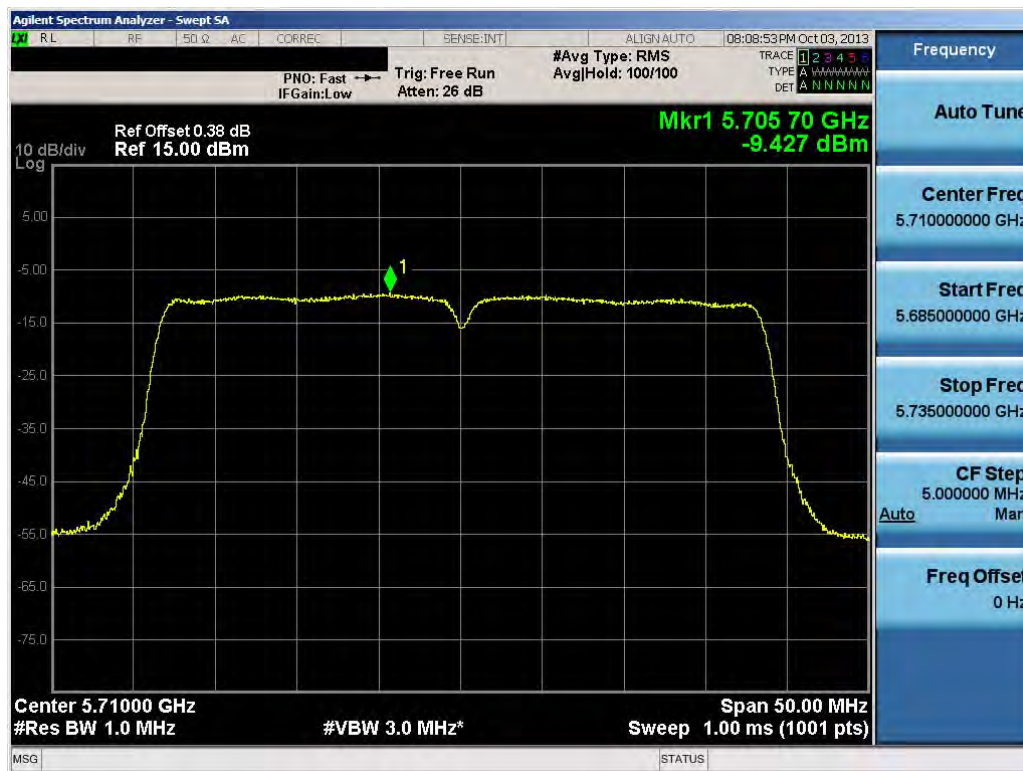

Plot 6-67. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 3) – Ch. 142)



Plot 6-68. Peak Power Spectral Density Plot (80MHz BW 802.11a/n/ac (UNII Band 3) – Ch. 106)

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 55 of 95




Plot 6-69. Peak Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 3) – Ch. 138)




Plot 6-70. Peak Power Spectral Density Plot (20MHz BW 802.11a (UNII Band 4) – Ch. 149)

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 56 of 95

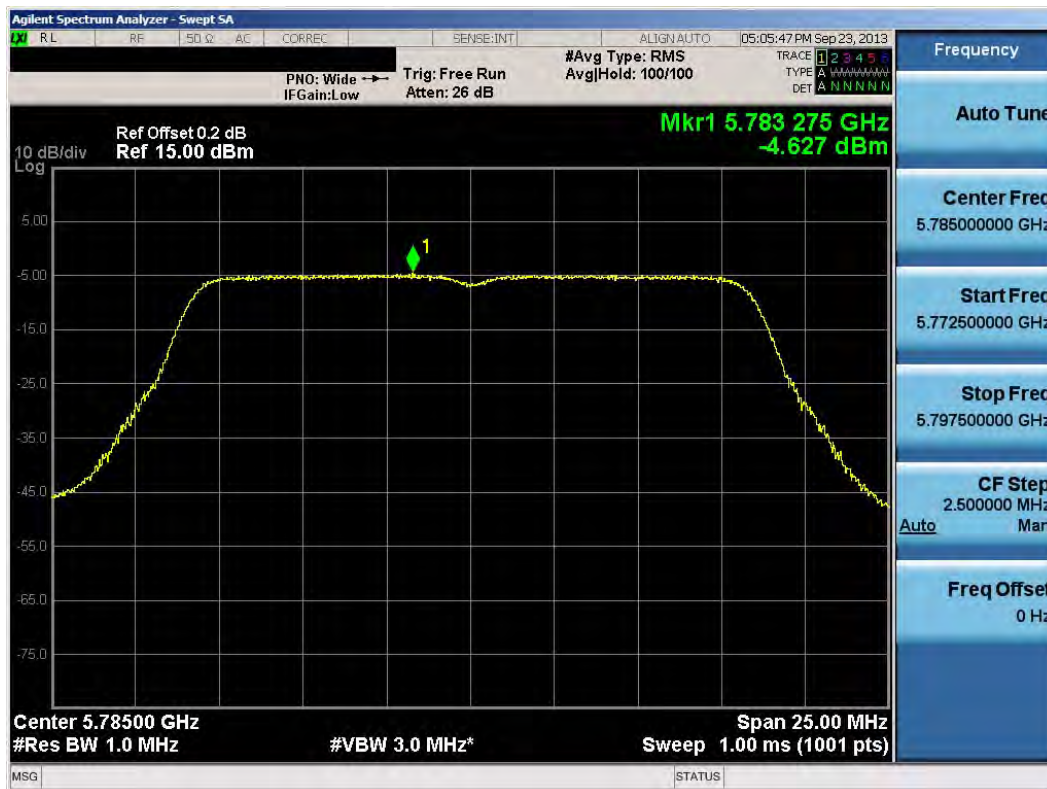


Plot 6-71. Peak Power Spectral Density Plot (20MHz BW 802.11a (UNII Band 4) – Ch. 157)

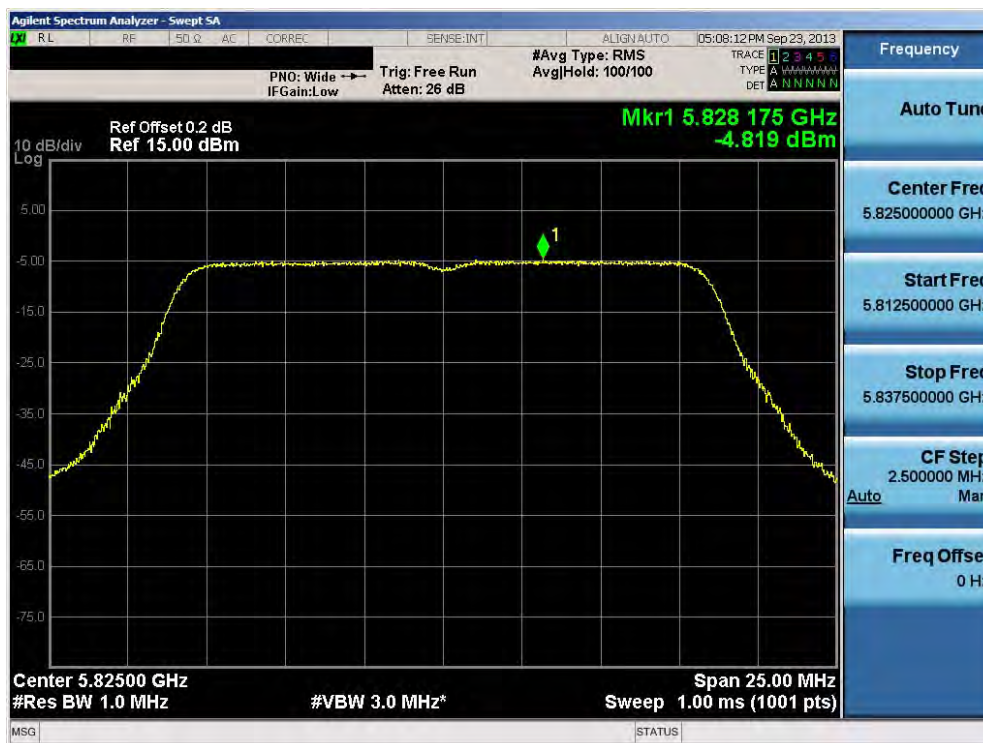


Plot 6-72. Peak Power Spectral Density Plot (20MHz BW 802.11a (UNII Band 4) – Ch. 165)

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 57 of 95

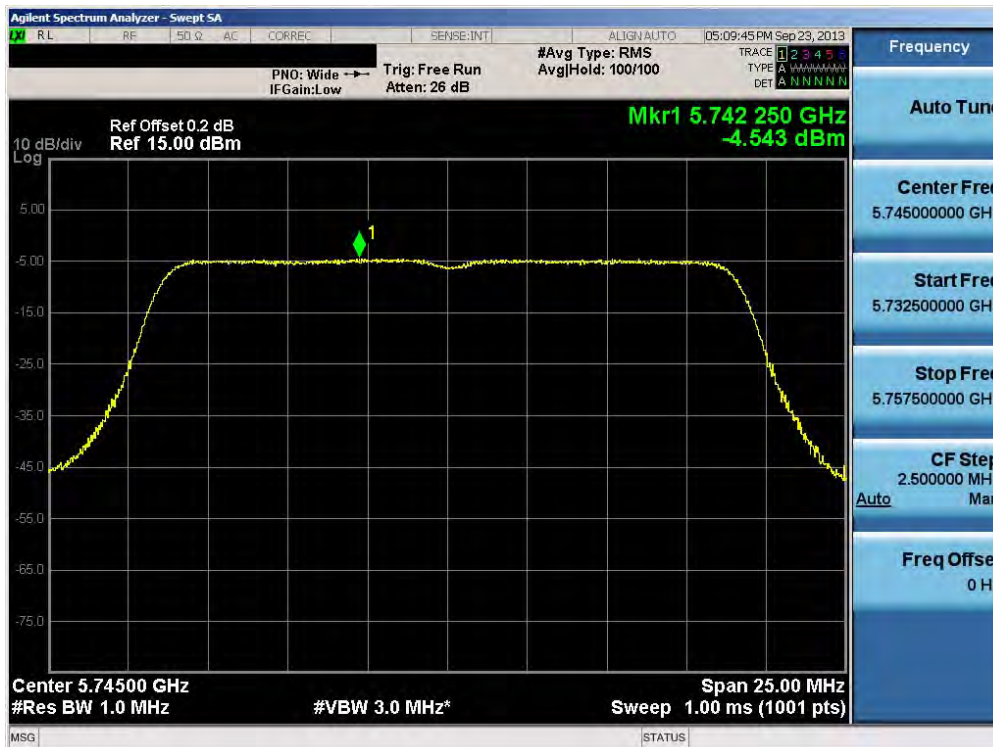

Plot 6-73. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 4) – Ch. 149)

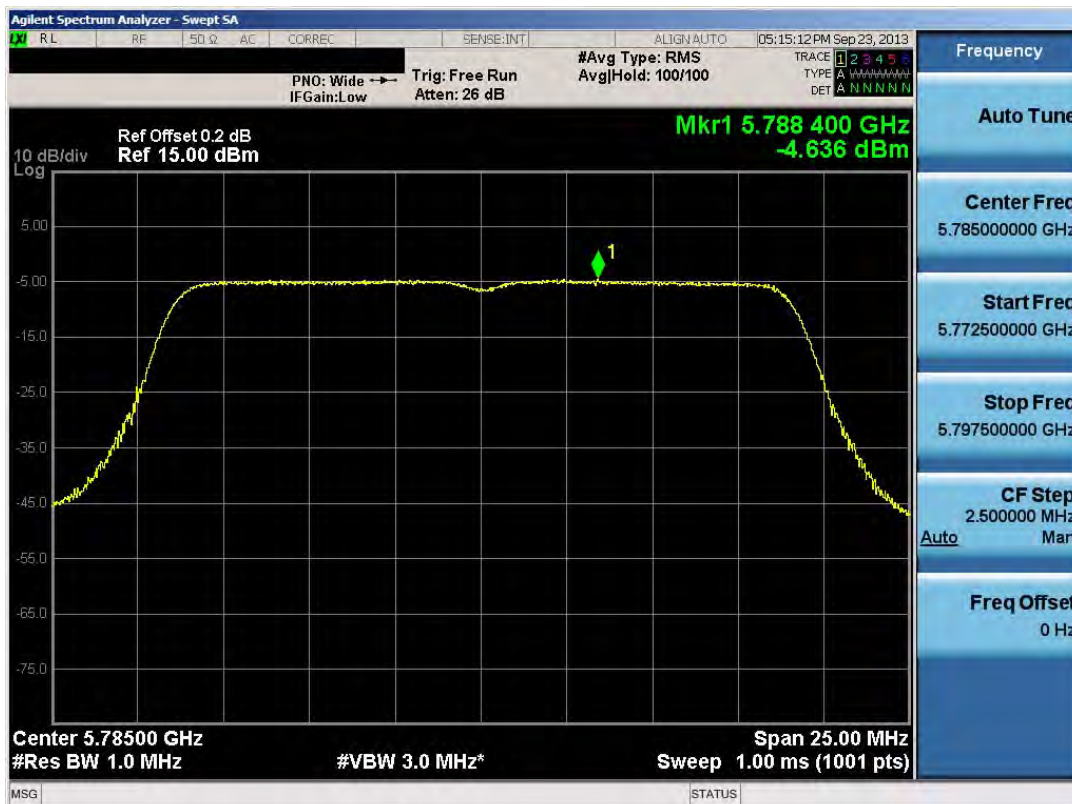


Plot 6-74. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 4) – Ch. 157)

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 58 of 95




Plot 6-75. Peak Power Spectral Density Plot (20MHz BW 802.11n (UNII Band 4) – Ch. 165)

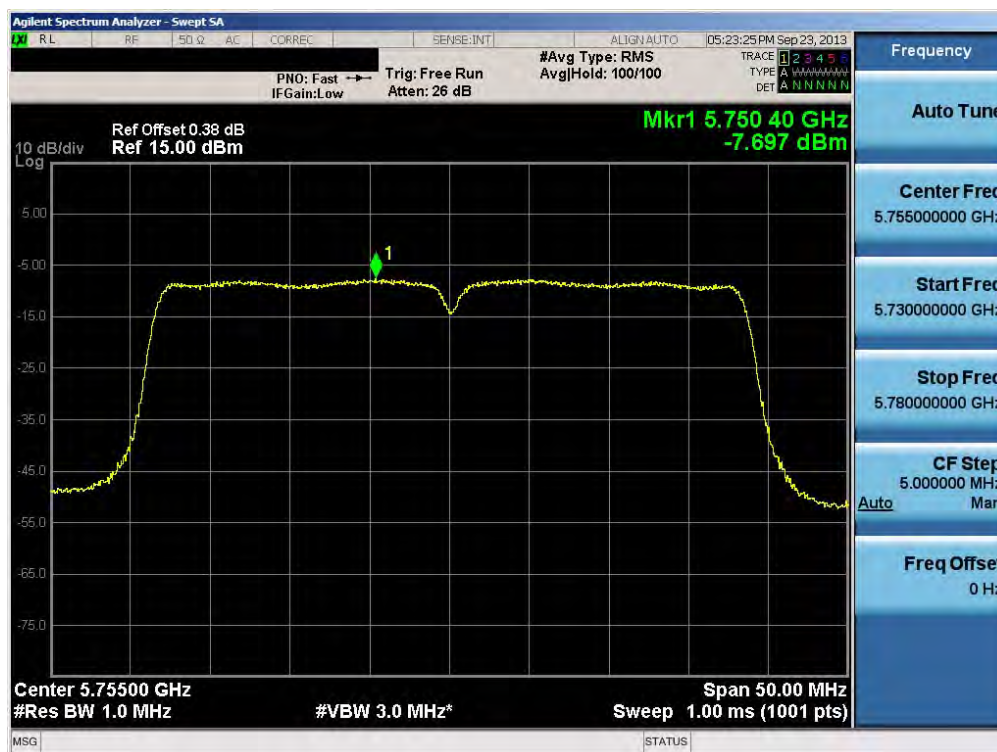

Plot 6-76. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 4) – Ch. 151)

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 59 of 95

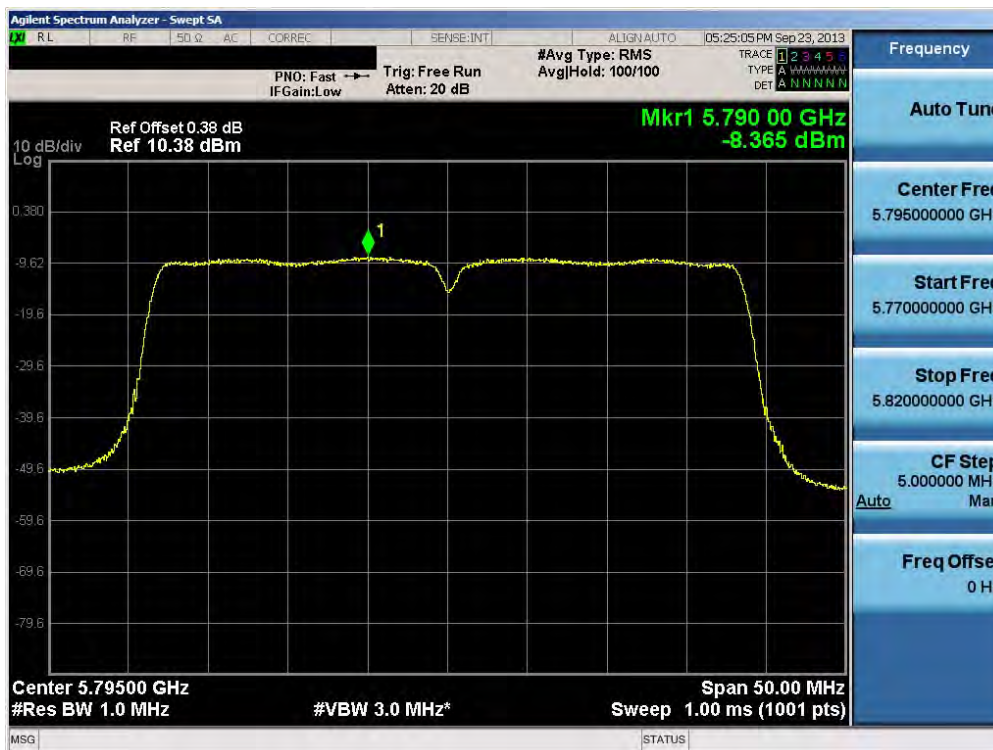

Plot 6-77. Peak Power Spectral Density Plot (40MHz BW 802.11n (UNII Band 4) – Ch. 159)



Plot 6-78. Peak Power Spectral Density Plot (80MHz BW 802.11ac (UNII Band 4) – Ch. 155)

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 60 of 95

6.5 Peak Excursion Ratio – 802.11a/n/ac §15.407(a)(6)

Test Overview and Limit

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033, and at the appropriate frequencies. Method SA-2, as defined in KDB 789033, was used to capture the average trace used to make the peak excursion measurement.

The largest permissible difference between the modulation envelope (measured using a peak hold function) and the maximum power spectral density is 13 dBm/MHz.

Test Procedure Used

KDB 789033 v01r03 – Section G
KDB 644545 D02 v01

Test Settings

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Detector = peak
6. Trace mode = max hold
7. Trace was allowed to stabilize
8. The peak search function of the spectrum analyzer was used to find the peak of the spectrum. This level was compared to the peak power density level found from the previous section to determine the peak excursion.

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

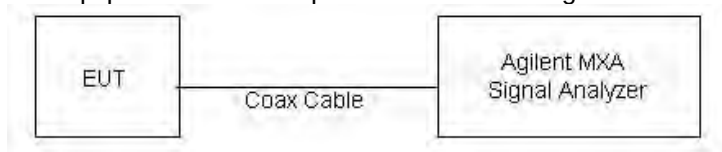


Figure 6-4. Test Instrument & Measurement Setup

Test Notes

The peak excursion was investigated for all signal types, modulation types, channel bandwidths, and variations in signal parameters and the worst case data is shown below. Only the worst case modulation mode on a single channel among all bands is reported since that is sufficient to demonstrate compliance to the peak excursion requirement per KDB 789033 v01r03.

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 61 of 95


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Peak Excursion Ratio [dBm]	Max Permissible Peak Excursion Ratio [dBm/MHz]	Margin [dB]
5180	36	a	6	8.50	13.0	-4.50
5320	64	n (20MHz)	6.5/7.2 (MCS0)	9.57	13.0	-3.43
5190	38	n (40MHz)	13.5/15 (MCS0)	9.83	13.0	-3.17
5290	58	ac (80MHz)	29.3/32.5 (MCS0)	9.48	13.0	-3.52

Table 6-10. Conducted Peak Excursion Ratio Measurements




Plot 6-79. Peak Excursion Ratio Plot (802.11a)

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 62 of 95

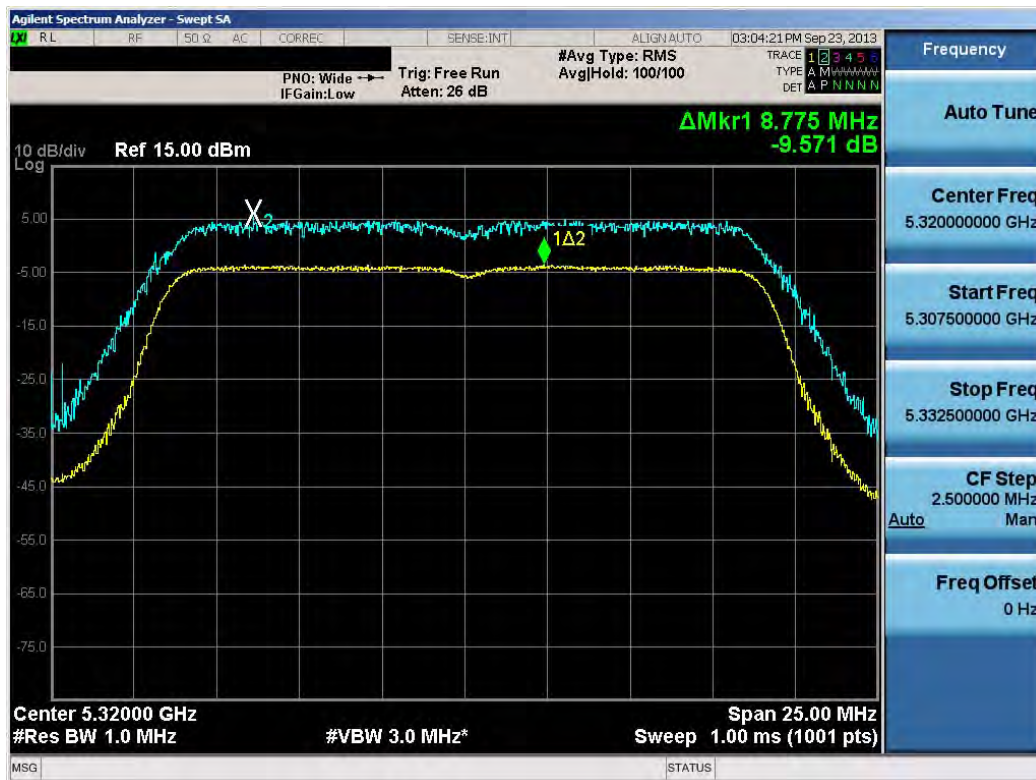

Plot 6-80. Peak Excursion Ratio Plot (20MHz BW 802.11n)

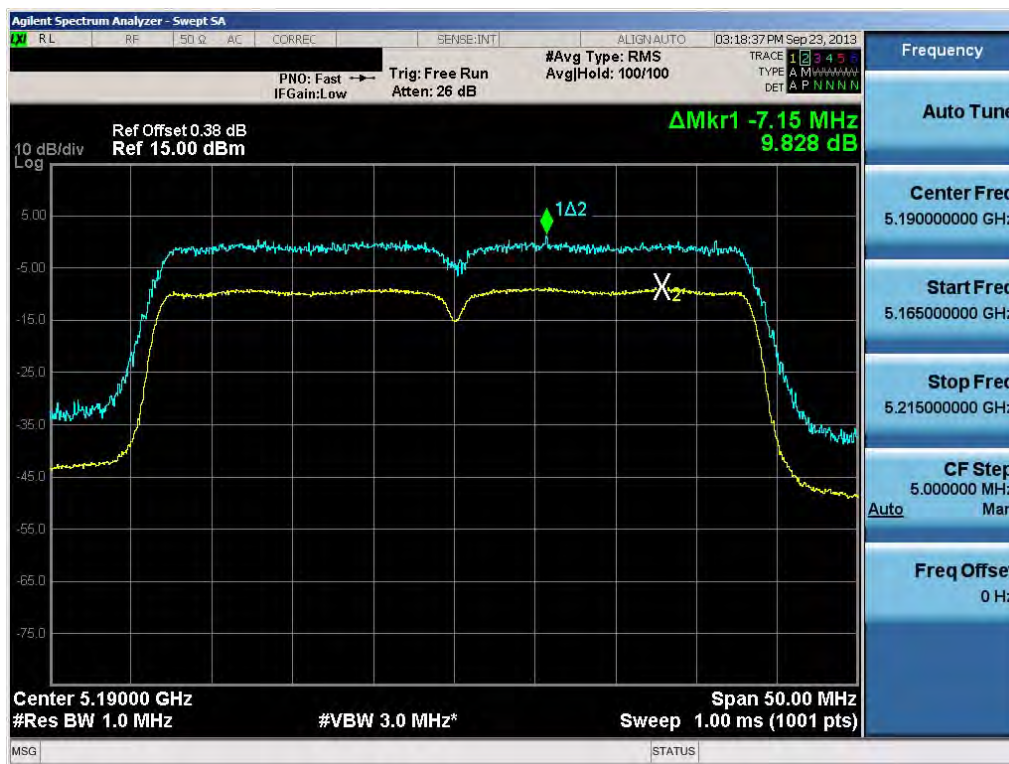

Plot 6-81. Peak Excursion Ratio Plot (40MHz BW 802.11n)

FCC ID: ZNFD959	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)	LG	Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 63 of 95

6.6 Frequency Stability

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,180,000,000 Hz
 CHANNEL: 36
 REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	5,179,999,992	-8	-0.00000016
100 %		- 30	5,179,999,987	-13	-0.00000025
100 %		- 20	5,179,999,993	-7	-0.00000013
100 %		- 10	5,179,999,983	-17	-0.00000033
100 %		0	5,179,999,991	-9	-0.00000018
100 %		+ 10	5,179,999,985	-15	-0.00000029
100 %		+ 20	5,179,999,996	-4	-0.00000008
100 %		+ 30	5,179,999,989	-11	-0.00000021
100 %		+ 40	5,179,999,999	-1	-0.00000003
100 %		+ 50	5,179,999,982	-18	-0.00000034
115 %	4.37	+ 20	5,179,999,981	-19	-0.00000036
BATT. ENDPOINT	3.40	+ 20	5,179,999,995	-5	-0.00000010

Table 6-11. Frequency Stability Measurements for UNII Band 1 (Ch. 36)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset	Page 65 of 95	

Frequency Stability (Cont'd)

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,260,000,000 Hz
 CHANNEL: 52
 REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	5,259,999,999	-1	-0.00000002
100 %		- 30	5,259,999,997	-3	-0.00000005
100 %		- 20	5,259,999,982	-18	-0.00000034
100 %		- 10	5,259,999,980	-20	-0.00000037
100 %		0	5,259,999,998	-2	-0.00000004
100 %		+ 10	5,259,999,998	-2	-0.00000004
100 %		+ 20	5,259,999,984	-16	-0.00000030
100 %		+ 30	5,259,999,992	-8	-0.00000015
100 %		+ 40	5,259,999,992	-8	-0.00000015
100 %		+ 50	5,259,999,986	-14	-0.00000027
115 %	4.37	+ 20	5,259,999,982	-18	-0.00000034
BATT. ENDPOINT	3.40	+ 20	5,260,000,000	0	-0.00000001

Table 6-12. Frequency Stability Measurements for UNII Band 2 (Ch. 52)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset	Page 66 of 95	

Frequency Stability (Cont'd)

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,500,000,000 Hz
 CHANNEL: 100
 REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	5,499,999,995	-5	-0.00000009
100 %		- 30	5,500,000,000	0	0.00000000
100 %		- 20	5,499,999,984	-16	-0.00000029
100 %		- 10	5,499,999,981	-19	-0.00000034
100 %		0	5,499,999,993	-7	-0.00000014
100 %		+ 10	5,499,999,990	-10	-0.00000019
100 %		+ 20	5,499,999,998	-2	-0.00000004
100 %		+ 30	5,499,999,991	-9	-0.00000017
100 %		+ 40	5,499,999,981	-19	-0.00000035
100 %		+ 50	5,499,999,989	-11	-0.00000020
115 %	4.37	+ 20	5,499,999,985	-15	-0.00000028
BATT. ENDPOINT	3.40	+ 20	5,499,999,999	-1	-0.00000001

Table 6-13. Frequency Stability Measurements for UNII Band 3 (Ch. 100)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset	Page 67 of 95	

Frequency Stability (Cont'd)

§15.407(g)

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

OPERATING FREQUENCY: 5,500,000,000 Hz
 CHANNEL: 149
 REFERENCE VOLTAGE: 3.8 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	+ 20 (Ref)	5,499,999,982	-18	-0.00000032
100 %		- 30	5,499,999,991	-9	-0.00000017
100 %		- 20	5,499,999,989	-11	-0.00000021
100 %		- 10	5,499,999,986	-14	-0.00000026
100 %		0	5,499,999,997	-3	-0.00000006
100 %		+ 10	5,499,999,994	-6	-0.00000011
100 %		+ 20	5,499,999,994	-6	-0.00000012
100 %		+ 30	5,500,000,000	0	-0.00000001
100 %		+ 40	5,499,999,987	-13	-0.00000023
100 %		+ 50	5,499,999,988	-12	-0.00000022
115 %	4.37	+ 20	5,499,999,984	-16	-0.00000030
BATT. ENDPOINT	3.40	+ 20	5,499,999,986	-14	-0.00000026

Table 6-14. Frequency Stability Measurements for UNII Band 3 (Ch. 100)

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset	Page 68 of 95	

6.7 Radiated Spurious Emission Measurements

§15.407(b)(1), (6), §15.205, §15.209; RSS-210 [A9.2]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in KDB 789033 v01r03, and at the appropriate frequencies. All channels, modes (e.g. 802.11a, 802.11n (20MHz BW), 802.11n (40MHz BW) and 802.11ac(20/40/80 MHz BW)), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 6-15 per Section 15.209.

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 6-15. Radiated Limits

Test Procedures Used

KDB 789033 v01r03 – Section H

KDB 644545 D02v01

Test Settings

Average Measurements above 1GHz (Method AD)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 69 of 95

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = 120kHz
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

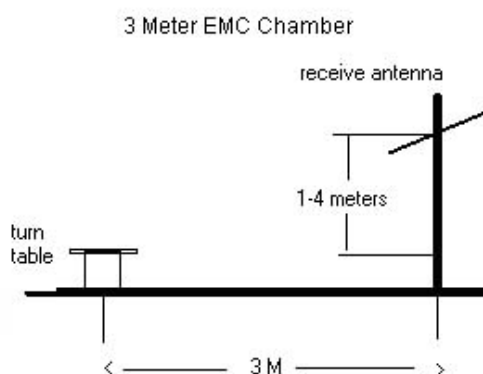


Figure 6-5. Test Instrument & Measurement Setup

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 70 of 95

Test Notes

1. All radiated spurious emissions levels were measured in a radiated test setup per the guidance of KDB 789033 v01r03 Section H.
2. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 6-15.
3. All spurious emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 6-11. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
4. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
5. This unit was tested with its standard battery.
6. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
7. Emission measurements reported were performed at 1 meter test distance (for RSE, with the application of a distance correction factor) while Band Edge measurements were made at 3 meter test distance.
8. Average levels at -135dBm and peak levels at -125dBm represent the analyzer noise floor and signify that no emission was detected.

Sample Calculations

Determining Spurious Emissions Levels

- o Field Strength Level $_{\text{dB}\mu\text{V/m}} = \text{Analyzer Level}_{\text{dBm}} + 107 + \text{AFCL}_{\text{dB/m}}$
- o $\text{AFCL}_{\text{dB/m}} = \text{Antenna Factor}_{\text{dB/m}} + \text{Cable Loss}_{\text{dB}}$
- o $\text{Margin}_{\text{dB}} = \text{Field Strength Level}_{\text{dB}\mu\text{V/m}} - \text{Limit}_{\text{dB}\mu\text{V/m}}$

Radiated Band Edge Measurement Offset

- o The amplitude offset shown in the radiated restricted band edge plots in Section 6.8 was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + 10 \text{ dB Attenuator}) - \text{Preamplifier Gain}$$

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 71 of 95

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 Meters
Operating Frequency: 5180MHz
Channel: 36

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10360.00	-98.69	Peak	H	55.49	-9.54	54.26	68.20	-13.94
* 15540.00	-135.00	Average	H	58.14	0.00	30.14	53.98	-23.84
* 15540.00	-125.00	Peak	H	58.14	0.00	40.14	73.98	-33.84
* 20720.00	-135.00	Average	H	44.04	0.00	16.04	53.98	-37.94
* 20720.00	-125.00	Peak	H	44.04	0.00	26.04	73.98	-47.94
25900.00	-125.00	Peak	H	44.84	0.00	26.84	68.20	-41.36

Table 6-16. Radiated Measurements

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 Meters
Operating Frequency: 5200MHz
Channel: 40

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10400.00	-100.10	Peak	H	55.75	-9.54	53.10	68.20	-15.10
* 15600.00	-135.00	Average	H	57.97	0.00	29.97	53.98	-24.01
* 15600.00	-125.00	Peak	H	57.97	0.00	39.97	73.98	-34.01
* 20800.00	-135.00	Average	H	44.03	0.00	16.03	53.98	-37.95
* 20800.00	-125.00	Peak	H	44.03	0.00	26.03	73.98	-47.95
26000.00	-125.00	Peak	H	44.96	0.00	26.96	68.20	-41.24

Table 6-17. Radiated Measurements

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 72 of 95

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 Meters
Operating Frequency: 5240MHz
Channel: 48

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10480.00	-97.67	Peak	H	56.26	-9.54	56.05	68.20	-12.15
* 15720.00	-135.00	Average	H	57.76	0.00	29.76	53.98	-24.22
* 15720.00	-125.00	Peak	H	57.76	0.00	39.76	73.98	-34.22
* 20960.00	-135.00	Average	H	44.00	0.00	16.00	53.98	-37.98
* 20960.00	-125.00	Peak	H	44.00	0.00	26.00	73.98	-47.98
26200.00	-125.00	Peak	H	44.75	0.00	26.75	68.20	-41.45

Table 6-18. Radiated Measurements

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 Meters
Operating Frequency: 5260MHz
Channel: 52

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10520.00	-96.18	Peak	H	56.65	-9.54	57.92	68.20	-10.28
* 15780.00	-135.00	Average	H	57.74	0.00	29.74	53.98	-24.23
* 15780.00	-125.00	Peak	H	57.74	0.00	39.74	73.98	-34.23
* 21040.00	-135.00	Average	H	43.95	0.00	15.95	53.98	-38.03
* 21040.00	-125.00	Peak	H	43.95	0.00	25.95	73.98	-48.03
26300.00	-125.00	Peak	H	44.39	0.00	26.39	68.20	-41.81

Table 6-19. Radiated Measurements

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 73 of 95

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 Meters
Operating Frequency: 5280MHz
Channel: 56

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
10560.00	-100.87	Peak	H	57.15	-9.54	53.74	68.20	-14.46
* 15840.00	-135.00	Average	H	57.72	0.00	29.72	53.98	-24.26
* 15840.00	-125.00	Peak	H	57.72	0.00	39.72	73.98	-34.26
* 21120.00	-135.00	Average	H	43.83	0.00	15.83	53.98	-38.15
* 21120.00	-125.00	Peak	H	43.83	0.00	25.83	73.98	-48.15
26400.00	-125.00	Peak	H	44.72	0.00	26.72	68.20	-41.48

Table 6-20. Radiated Measurements

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 Meters
Operating Frequency: 5320MHz
Channel: 64

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 10640.00	-110.18	Average	H	58.12	-9.54	45.40	53.98	-8.58
* 10640.00	-99.97	Peak	H	58.12	-9.54	55.61	73.98	-18.37
* 15960.00	-135.00	Average	H	57.59	0.00	29.59	53.98	-24.39
* 15960.00	-125.00	Peak	H	57.59	0.00	39.59	73.98	-34.39
* 21280.00	-135.00	Average	H	43.71	0.00	15.71	53.98	-38.27
* 21280.00	-125.00	Peak	H	43.71	0.00	25.71	73.98	-48.27
26600.00	-125.00	Peak	H	47.29	0.00	29.29	68.20	-38.91

Table 6-21. Radiated Measurements

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 74 of 95

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1Meters
Operating Frequency: 5500MHz
Channel: 100

	Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11000.00	-111.10	Average	H	63.49	-9.54	49.85	53.98	-4.13
*	11000.00	-100.94	Peak	H	63.49	-9.54	60.01	73.98	-13.96
	16500.00	-125.00	Peak	H	57.78	0.00	39.78	68.20	-28.42
	22000.00	-125.00	Peak	H	43.95	0.00	25.95	68.20	-42.25
	27500.00	-125.00	Peak	H	48.50	0.00	30.50	68.20	-37.70

Table 6-22. Radiated Measurements

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 Meters
Operating Frequency: 5580MHz
Channel: 116

	Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11160.00	-112.28	Average	H	61.07	-9.54	46.25	53.98	-7.73
*	11160.00	-101.08	Peak	H	61.07	-9.54	57.45	73.98	-16.53
	16740.00	-125.00	Peak	H	58.10	0.00	40.10	68.20	-28.10
*	22320.00	-135.00	Average	H	44.47	0.00	16.47	53.98	-37.50
*	22320.00	-125.00	Peak	H	44.47	0.00	26.47	73.98	-47.50
	27900.00	-125.00	Peak	H	48.02	0.00	30.02	68.20	-38.18

Table 6-23. Radiated Measurements

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 75 of 95

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 Meters
Operating Frequency: 5700MHz
Channel: 140

	Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
*	11400.00	-112.43	Average	H	57.98	-9.54	43.01	53.98	-10.97
*	11400.00	-100.41	Peak	H	57.98	-9.54	55.03	73.98	-18.95
	17100.00	-125.00	Peak	H	60.72	0.00	42.72	68.20	-25.48
*	22800.00	-135.00	Average	H	44.47	0.00	16.47	53.98	-37.51
*	22800.00	-125.00	Peak	H	44.47	0.00	26.47	73.98	-47.51
	28500.00	-125.00	Peak	H	48.08	0.00	30.08	68.20	-38.12

Table 6-24. Radiated Measurements

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 Meters
Operating Frequency: 5745MHz
Channel: 149

	Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
	11490.00	-110.48	Avg	H	56.91	-9.54	43.89	53.98	-10.09
	11490.00	-101.22	Peak	H	56.91	-9.54	53.15	73.98	-20.83
	17235.00	-125.00	Peak	H	59.91	0.00	41.91	68.20	-26.29
	22980.00	-135.00	Avg	H	44.53	0.00	16.53	53.98	-37.45
	22980.00	-125.00	Peak	H	44.53	0.00	26.53	73.98	-47.45

Table 6-25. Radiated Measurements

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 76 of 95

Radiated Spurious Emission Measurements (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 Meters
Operating Frequency: 5785MHz
Channel: 157

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
11570.00	-109.63	Avg	H	56.39	-9.54	44.22	53.98	-9.76
11570.00	-101.50	Peak	H	56.39	-9.54	52.35	73.98	-21.63
17355.00	-125.00	Peak	H	59.73	0.00	41.73	68.20	-26.47
23140.00	-125.00	Peak	H	44.49	0.00	26.49	68.20	-41.71
28925.00	-125.00	Peak	H	42.76	0.00	24.76	68.20	-22.71

Table 6-26. Radiated Measurements

Worst Case Mode: 802.11a
Worst Case Transfer Rate: 6 Mbps
Distance of Measurements: 1 Meters
Operating Frequency: 5825MHz
Channel: 165

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
11650.00	-110.45	Avg	H	56.09	-9.54	43.10	53.98	-10.88
11650.00	-99.62	Peak	H	56.09	-9.54	53.93	73.98	-20.05
17475.00	-125.00	Peak	H	59.67	0.00	41.67	68.20	-26.53
23300.00	-125.00	Peak	H	44.47	0.00	26.47	68.20	-41.73
29125.00	-125.00	Peak	H	42.71	0.00	24.71	68.20	-43.49

Table 6-27. Radiated Measurements

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 77 of 95

6.8 Radiated Band Edge Measurements (20MHz BW)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n (20MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5180MHz

Channel: 36

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
5144.25	-106.57	Average	H	42.82	43.25	53.98	-10.73
5144.25	-93.42	Peak	H	42.82	56.40	73.98	-17.58
5146.80	-107.23	Average	H	42.83	42.60	53.98	-11.38
5146.80	-93.04	Peak	H	42.83	56.80	73.98	-17.18
5150.00	-105.68	Average	H	42.85	44.17	53.98	-9.81
5150.00	-90.87	Peak	H	42.85	58.98	73.98	-15.00

Table 6-28. Radiated Restricted Band Measurements (4.5 – 5.15GHz)

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 78 of 95

Radiated Band Edge Measurements (20MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n (20MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5320MHz

Channel: 64

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
5350.00	-107.35	Average	H	43.33	42.98	53.98	-11.00
5350.00	-95.32	Peak	H	43.33	55.01	73.98	-18.97
5353.05	-107.74	Average	H	43.34	42.60	53.98	-11.38
5353.05	-97.74	Peak	H	43.34	52.60	73.98	-21.38
5355.35	-108.27	Average	H	43.34	42.08	53.98	-11.90
5355.35	-97.57	Peak	H	43.34	52.77	73.98	-21.21

Table 6-29. Radiated Restricted Band Measurements (5.35 – 5.46GHz, 5.46 – 5.47GHz)

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 79 of 95

Radiated Band Edge Measurements (20MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n (20MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5500MHz

Channel: 100

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
5440.67	-109.69	Average	H	43.58	40.89	53.98	-13.09
5440.67	-98.53	Peak	H	43.58	52.04	73.98	-21.93
5459.50	-109.38	Average	H	43.65	41.27	53.98	-12.71
5459.50	-98.87	Peak	H	43.65	51.78	73.98	-22.20
5469.50	-94.76	Peak	H	43.69	55.93	68.20	-12.27

Table 6-30. Radiated Restricted Band Measurements (5.35 – 5.46GHz, 5.46 – 5.47GHz)

Worst Case Mode: 802.11n (20MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5700MHz

Channel: 140

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
5850.00	-96.69	Peak	H	44.41	54.72	68.20	-13.48
5854.20	-98.55	Peak	H	44.42	52.87	68.20	-15.33
5871.70	-99.17	Peak	H	44.46	52.29	68.20	-15.91

Table 6-31. Radiated Restricted Band Measurements

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 80 of 95

6.9 Radiated Band Edge Measurements (40MHz BW)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5190MHz

Channel: 38

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
5139.75	-104.07	Average	H	42.80	45.74	53.98	-8.24
5139.75	-92.51	Peak	H	42.80	57.30	73.98	-16.68
5144.80	-102.15	Average	H	42.82	47.68	53.98	-6.30
5144.80	-87.70	Peak	H	42.82	62.12	73.98	-11.86
5150.00	-99.04	Average	H	42.85	50.81	53.98	-3.17
5150.00	-84.83	Peak	H	42.85	65.01	73.98	-8.97

Table 6-32. Radiated Restricted Band Measurements (4.5 – 5.15GHz)

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 81 of 95

Radiated Band Edge Measurements (40MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5310MHz

Channel: 62

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
5350.00	-106.03	Average	H	43.33	44.31	53.98	-9.67
5350.00	-89.66	Peak	H	43.33	60.67	73.98	-13.31
5357.05	-108.00	Average	H	43.35	42.35	53.98	-11.63
5357.05	-91.60	Peak	H	43.35	58.74	73.98	-15.24
5364.75	-108.83	Average	H	43.36	41.53	53.98	-12.45
5364.75	-96.72	Peak	H	43.36	53.64	73.98	-20.34

Table 6-33. Radiated Restricted Band Measurements (5.35 – 5.46GHz, 5.46 – 5.47GHz)

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 82 of 95

Radiated Band Edge Measurements (40MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5510MHz

Channel: 102

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
5457.12	-106.94	Average	H	43.64	43.71	53.98	-10.27
5457.12	-91.17	Peak	H	43.64	59.47	73.98	-14.51
5459.50	-106.38	Average	H	43.65	44.27	53.98	-9.71
5459.50	-91.21	Peak	H	43.65	59.44	73.98	-14.54
5469.50	-88.76	Peak	H	43.69	61.93	68.20	-6.27

Table 6-34. Radiated Restricted Band Measurements (5.35 – 5.46GHz, 5.46 – 5.47GHz)

Worst Case Mode: 802.11n (40MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5690MHz

Channel: 138

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
5850.00	-98.13	Peak	H	44.41	53.28	68.20	-14.92
5855.12	-98.84	Peak	H	44.42	52.59	68.20	-15.61
5860.40	-98.98	Peak	H	44.43	52.45	68.20	-15.75

Table 6-35. Radiated Restricted Band Measurements

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 83 of 95

6.10 Radiated Band Edge Measurements (80MHz BW)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11ac (80MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5210MHz

Channel: 42

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
5139.80	-100.52	Average	H	42.80	49.28	53.98	-4.70
5139.80	-91.41	Peak	H	42.80	58.39	73.98	-15.59
5148.75	-99.03	Average	H	42.84	50.81	53.98	-3.17
5148.75	-81.85	Peak	H	42.84	67.99	73.98	-5.99
5150.00	-99.24	Average	H	42.85	50.60	53.98	-3.37
5150.00	-90.98	Peak	H	42.85	58.86	73.98	-15.11

Table 6-36. Radiated Restricted Band Measurements

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 84 of 95

Radiated Band Edge Measurements (80MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11ac (80MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5290MHz

Channel: 58

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
5350.00	-106.75	Average	H	43.33	43.58	53.98	-10.40
5350.00	-87.76	Peak	H	43.33	62.57	73.98	-11.41
5357.05	-108.19	Average	H	43.35	42.16	53.98	-11.82
5357.05	-93.89	Peak	H	43.35	56.46	73.98	-17.52
5372.45	-109.79	Average	H	43.37	40.58	53.98	-13.40
5372.45	-94.22	Peak	H	43.37	56.15	73.98	-17.83

Table 6-37. Radiated Restricted Band Measurements

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)				Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset				Page 85 of 95

Radiated Band Edge Measurements (80MHz BW) (Cont'd)

§15.407(b)(1) and (2), §15.205 & §15.209; RSS-210 [A9.2]

Worst Case Mode: 802.11ac (80MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5530MHz

Channel: 106

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
5449.89	-106.23	Average	H	43.61	44.39	53.98	-9.59
5449.89	-97.88	Peak	H	43.61	52.73	73.98	-21.25
5459.50	-104.83	Average	H	43.65	45.82	53.98	-8.16
5459.50	-92.62	Peak	H	43.65	58.03	73.98	-15.95
5469.50	-89.31	Peak	H	43.69	61.38	68.20	-6.82

Table 6-38. Radiated Restricted Band Measurements

Worst Case Mode: 802.11ac (80MHz)

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 5775MHz

Channel: 155

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
5850.00	-95.07	Peak	H	44.41	56.34	68.20	-11.86
5852.50	-96.06	Peak	H	44.42	55.35	68.20	-12.85
5856.60	-96.97	Peak	H	44.43	54.45	68.20	-13.75

Table 6-39. Radiated Restricted Band Measurements

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 86 of 95


6.11 Line-Conducted Test Data

§15.207; RSS-Gen [7.2.2]

PCTEST Engineering Laboratory Inc.

Company : LG Electronics MobileComm U.S.A
Model Number : LG-D959
FCC ID Code : ZNFD959
Standard : FCC Part 15C, 15.207

Power Source : AC120V/60Hz
Tested Date : 09/26/2013
Note : Tested with 802.11a
UNII Band 1 ON

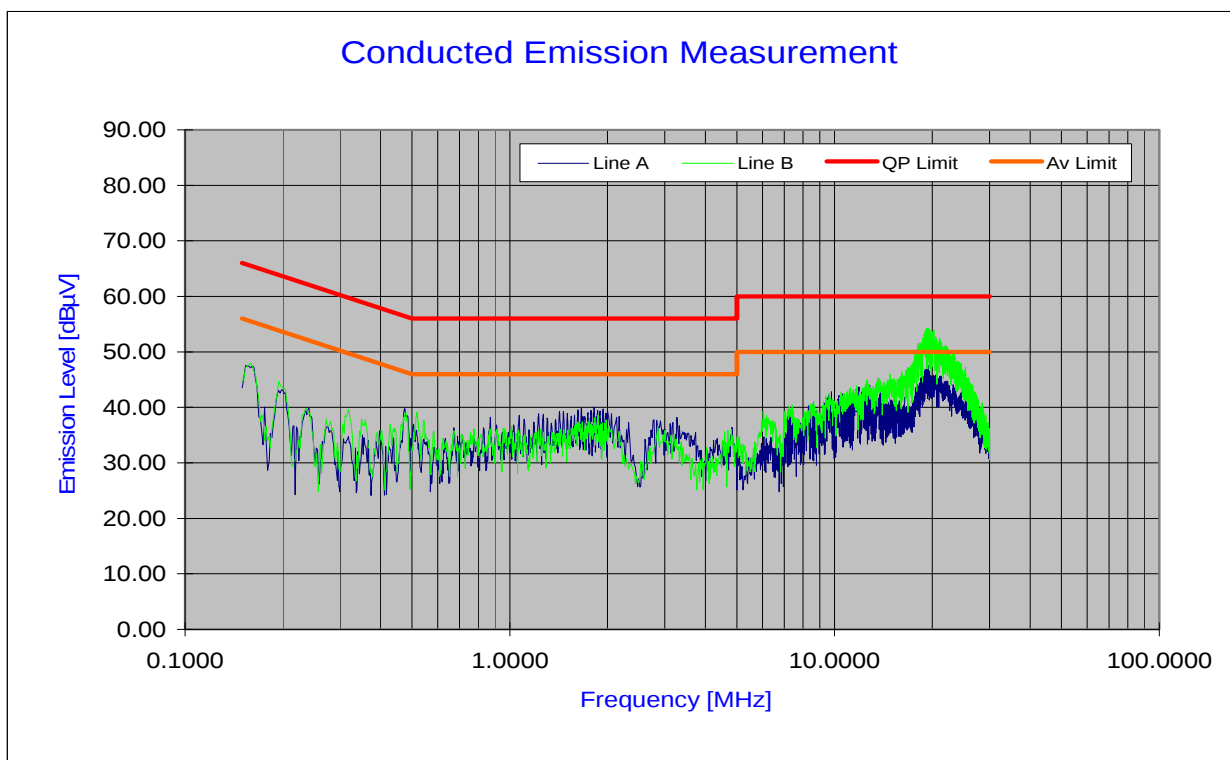

Plot 6-83. Line Conducted Plot with 802.11a UNII Band 1 (L1)

Notes:

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 36. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. L1 = Phase; N = Neutral
4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
6. Margin (dB) = QP/AVLimit (dBμV) - QP/AV Level (dBμV)
7. Traces shown in plot are made using a peak detector.
8. Deviations to the Specifications: None.

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 87 of 95

Line-Conducted Test Data (Cont'd)

§15.207; RSS-Gen [7.2.2]

No.	Line	Frequency [MHz]	Factor [dB]	QP [dBμV]	Limit [dBμV]	Margin [dB]	Average [dBμV]	Limit [dBμV]	Margin [dB]
1	A	18.044	8.33	38.58	60.00	-21.42	31.00	50.00	-19.00
2	A	19.347	8.43	42.00	60.00	-18.00	34.21	50.00	-15.79
3	A	19.590	8.44	41.00	60.00	-19.00	33.37	50.00	-16.63
4	A	20.406	8.52	40.74	60.00	-19.26	33.02	50.00	-16.98
5	A	21.258	8.63	39.69	60.00	-20.31	32.10	50.00	-17.90
6	A	21.787	8.70	38.24	60.00	-21.76	30.89	50.00	-19.11
7	A	21.801	8.70	38.67	60.00	-21.33	30.80	50.00	-19.20
8	A	22.035	8.73	39.08	60.00	-20.92	31.88	50.00	-18.12
9	A	22.080	8.73	39.42	60.00	-20.58	31.80	50.00	-18.20
10	A	22.235	8.75	38.88	60.00	-21.12	31.56	50.00	-18.44
11	B	18.069	8.40	45.53	60.00	-14.47	33.92	50.00	-16.08
12	B	18.269	8.42	45.80	60.00	-14.20	34.60	50.00	-15.40
13	B	18.732	8.46	46.92	60.00	-13.08	35.05	50.00	-14.95
14	B	19.027	8.48	48.24	60.00	-11.76	36.52	50.00	-13.48
15	B	19.178	8.49	48.58	60.00	-11.42	37.42	50.00	-12.58
16	B	19.438	8.51	48.27	60.00	-11.73	36.94	50.00	-13.06
17	B	20.911	8.68	46.61	60.00	-13.39	35.42	50.00	-14.58
18	B	20.991	8.69	46.86	60.00	-13.14	35.31	50.00	-14.69
19	B	21.293	8.74	46.32	60.00	-13.68	34.78	50.00	-15.22
20	B	21.999	8.83	45.19	60.00	-14.81	34.66	50.00	-15.34

Table 6-40. Line Conducted Data with 802.11a UNII Band 1 (N)

Notes:

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 36. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. L1 = Phase; N = Neutral
4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
6. Margin (dB) = QP/AVLimit (dBμV) - QP/AV Level (dBμV)
7. Traces shown in plot are made using a peak detector.
8. Deviations to the Specifications: None.

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 88 of 95


Line-Conducted Test Data (Cont'd)

§15.207; RSS-Gen [7.2.2]

PCTEST Engineering Laboratory Inc.

Company : LG Electronics MobileComm U.S.A
Model Number : LG-D959
FCC ID Code : ZNFD959
Standard : FCC Part 15C, 15.207

Power Source : AC120V/60Hz
Tested Date : 09/26/2013
Note : Tested with 802.11a
UNII Band 2 ON

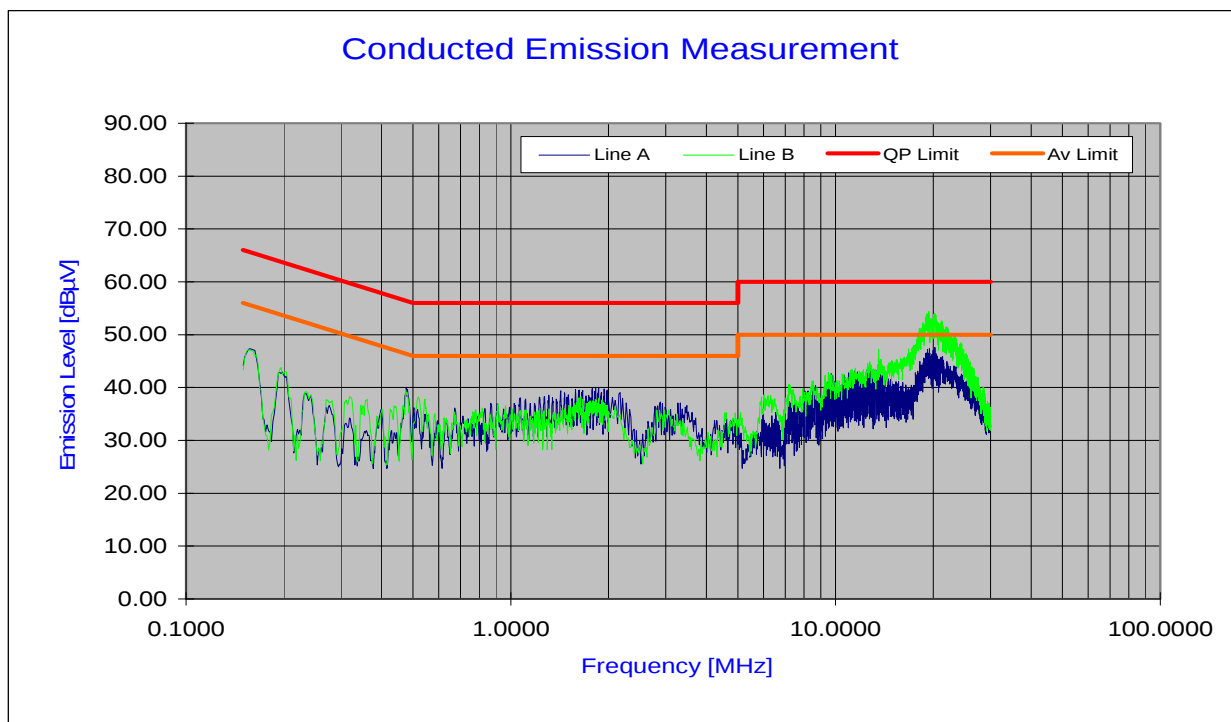

Plot 6-84. Line Conducted Plot with 802.11a UNII Band 2

Notes:

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 52. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. L1 = Phase; N = Neutral
4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
6. Margin (dB) = QP/AVLimit (dBμV) - QP/AV Level (dBμV)
7. Traces shown in plot are made using a peak detector.
8. Deviations to the Specifications: None.

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 89 of 95

Line-Conducted Test Data (Cont'd)

§15.207; RSS-Gen [7.2.2]

No.	Line	Frequency [MHz]	Factor [dB]	QP [dBμV]	Limit [dBμV]	Margin [dB]	Average [dBμV]	Limit [dBμV]	Margin [dB]
1	A	18.253	8.35	39.21	60.00	-20.79	31.22	50.00	-18.78
2	A	19.048	8.40	41.26	60.00	-18.74	33.74	50.00	-16.26
3	A	19.193	8.41	41.87	60.00	-18.13	34.22	50.00	-15.78
4	A	19.383	8.43	42.07	60.00	-17.93	34.22	50.00	-15.78
5	A	20.234	8.50	41.58	60.00	-18.42	33.89	50.00	-16.11
6	A	20.897	8.59	40.17	60.00	-19.83	32.52	50.00	-17.48
7	A	20.943	8.59	40.25	60.00	-19.75	32.43	50.00	-17.57
8	A	21.330	8.64	39.51	60.00	-20.49	32.00	50.00	-18.00
9	A	21.368	8.65	39.44	60.00	-20.56	31.92	50.00	-18.08
10	A	22.010	8.73	39.15	60.00	-20.85	31.78	50.00	-18.22
11	B	18.587	8.44	46.50	60.00	-13.50	35.08	50.00	-14.92
12	B	18.793	8.46	47.31	60.00	-12.69	35.37	50.00	-14.63
13	B	19.272	8.50	49.01	60.00	-10.99	37.54	50.00	-12.46
14	B	20.228	8.58	48.12	60.00	-11.88	36.84	50.00	-13.16
15	B	20.454	8.62	47.40	60.00	-12.60	36.15	50.00	-13.85
16	B	21.151	8.72	46.90	60.00	-13.10	35.10	50.00	-14.90
17	B	21.247	8.73	46.38	60.00	-13.62	35.17	50.00	-14.83
18	B	21.321	8.74	45.96	60.00	-14.04	34.53	50.00	-15.47
19	B	21.876	8.82	45.14	60.00	-14.86	34.19	50.00	-15.81
20	B	22.114	8.85	45.40	60.00	-14.60	34.46	50.00	-15.54

Plot 6-85. Line Conducted Plot with 802.11a UNII Band 2

Notes:

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 52. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. L1 = Phase; N = Neutral
4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
6. Margin (dB) = QP/AVLimit (dBμV) - QP/AV Level (dBμV)
7. Traces shown in plot are made using a peak detector.
8. Deviations to the Specifications: None.

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 90 of 95


Line-Conducted Test Data (Cont'd)

§15.207; RSS-Gen [7.2.2]

PCTEST Engineering Laboratory Inc.

Company : LG Electronics MobileComm U.S.A
Model Number : LG-D959
FCC ID Code : ZNFD959
Standard : FCC Part 15C, 15.207

Power Source : AC120V/60Hz
Tested Date : 09/26/2013
Note : Tested with 802.11a
UNII Band 3 ON

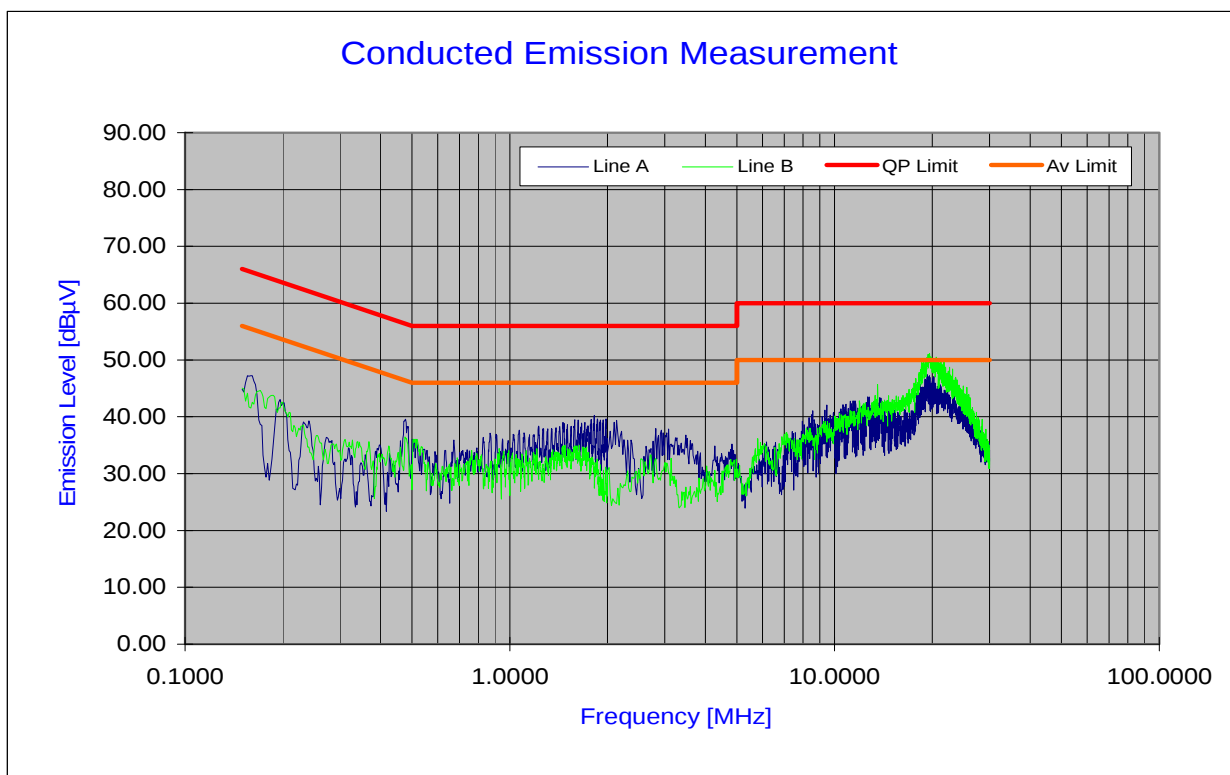

Plot 6-86. Line Conducted Plot with 802.11a UNII Band 3

Notes:

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 100. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. L1 = Phase; N = Neutral
4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
6. Margin (dB) = QP/AVLimit (dBμV) - QP/AV Level (dBμV)
7. Traces shown in plot are made using a peak detector.
8. Deviations to the Specifications: None.

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 91 of 95

Line-Conducted Test Data (Cont'd)

§15.207; RSS-Gen [7.2.2]

No.	Line	Frequency [MHz]	Factor [dB]	QP [dBμV]	Limit [dBμV]	Margin [dB]	Average [dBμV]	Limit [dBμV]	Margin [dB]
1	A	18.487	8.36	38.31	60.00	-21.69	30.15	50.00	-19.85
2	A	18.642	8.37	38.95	60.00	-21.05	31.44	50.00	-18.56
3	A	18.720	8.38	39.40	60.00	-20.60	32.32	50.00	-17.68
4	A	19.227	8.42	41.83	60.00	-18.17	32.43	50.00	-17.57
5	A	20.125	8.49	41.24	60.00	-18.76	32.68	50.00	-17.32
6	A	20.742	8.57	39.90	60.00	-20.10	32.55	50.00	-17.45
7	A	21.156	8.62	39.32	60.00	-20.68	31.73	50.00	-18.27
8	A	21.750	8.69	38.55	60.00	-21.45	30.91	50.00	-19.09
9	A	22.183	8.75	38.15	60.00	-21.85	30.50	50.00	-19.50
10	A	22.227	8.75	38.18	60.00	-21.82	30.33	50.00	-19.67
11	B	19.189	8.49	44.87	60.00	-15.13	32.22	50.00	-17.78
12	B	19.584	8.52	45.97	60.00	-14.03	32.64	50.00	-17.36
13	B	20.578	8.64	44.40	60.00	-15.60	32.44	50.00	-17.56
14	B	20.929	8.69	43.64	60.00	-16.36	32.37	50.00	-17.63
15	B	21.293	8.74	43.21	60.00	-16.79	31.50	50.00	-18.50
16	B	21.384	8.75	42.69	60.00	-17.31	31.05	50.00	-18.95
17	B	21.735	8.80	42.80	60.00	-17.20	31.07	50.00	-18.93
18	B	22.005	8.84	41.70	60.00	-18.30	30.98	50.00	-19.02
19	B	22.517	8.90	41.93	60.00	-18.07	30.84	50.00	-19.16
20	B	23.028	8.97	39.82	60.00	-20.18	30.58	50.00	-19.42

Table 6-41. Line Conducted Data with 802.11a UNII Band 3 (N)

Notes:

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 100. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. L1 = Phase; N = Neutral
4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
6. Margin (dB) = QP/AVLimit (dBμV) - QP/AV Level (dBμV)
7. Traces shown in plot are made using a peak detector.
8. Deviations to the Specifications: None.

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 92 of 95


Line-Conducted Test Data (Cont'd)

§15.207; RSS-Gen [7.2.2]

PCTEST Engineering Laboratory Inc.

Company : LG Electronics MobileComm U.S.A
Model Number : ZNFD959
FCC ID Code : ZNFD959
Standard : FCC Part 15C, 15.207

Power Source : AC120V/60Hz
Tested Date : 09/26/2013
Note : Tested with 802.11 a UNII Band 4 ON

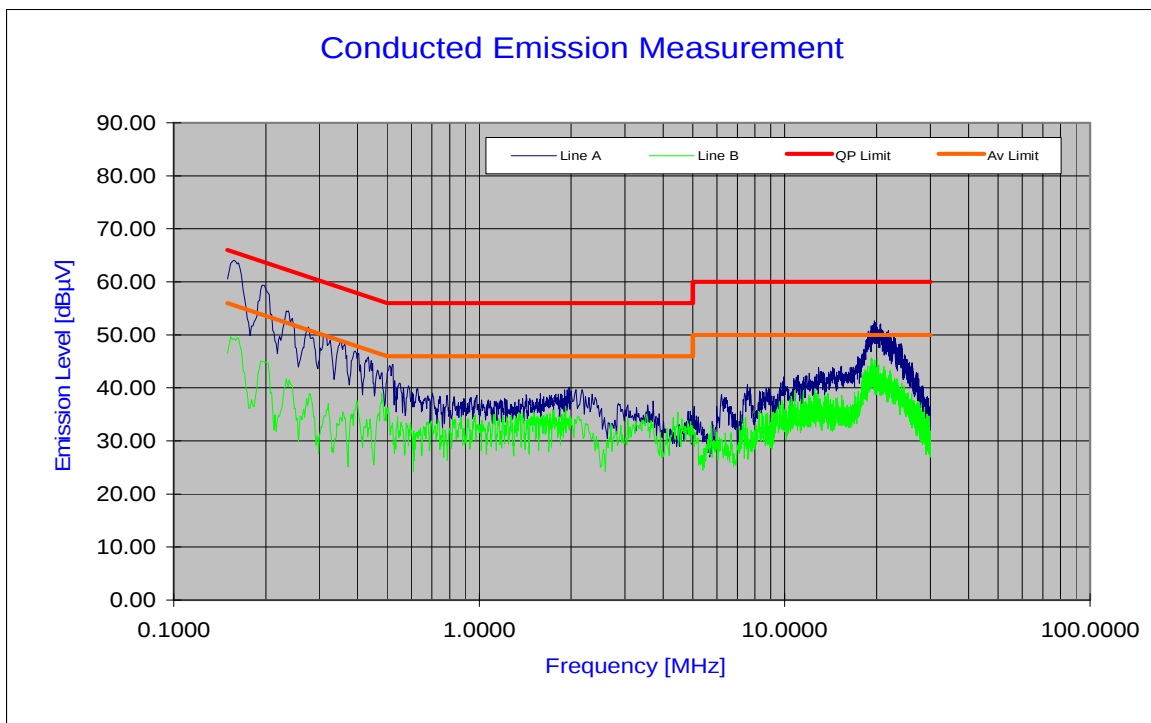

Plot 6-87. Line Conducted Plot with 802.11a UNII Band 4

Notes:

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 157. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. L1 = Phase; N = Neutral
4. Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
5. QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
6. Margin (dB) = QP/AVLimit (dBμV) - QP/AV Level (dBμV)
7. Traces shown in plot are made using a peak detector.
8. Deviations to the Specifications: None.

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 93 of 95

Line-Conducted Test Data (Cont'd)

§15.207; RSS-Gen [7.2.2]

No.	Line	Frequency [MHz]	Factor [dB]	QP [dBμV]	Limit [dBμV]	Margin [dB]	Average [dBμV]	Limit [dBμV]	Margin [dB]
1	A	0.166	6.86	59.21	65.18	-5.97	44.37	55.18	-10.81
2	A	0.205	6.87	53.88	63.43	-9.55	38.21	53.43	-15.22
3	A	0.243	6.89	47.84	61.98	-14.14	33.81	51.98	-18.17
4	A	0.282	6.91	42.74	60.76	-18.02	29.93	50.76	-20.83
5	A	0.320	6.92	41.19	59.71	-18.52	28.35	49.71	-21.36
6	A	19.598	8.44	47.15	60.00	-12.85	37.70	50.00	-12.30
7	A	20.966	8.60	45.03	60.00	-14.97	35.88	50.00	-14.12
8	A	20.976	8.60	44.93	60.00	-15.07	35.92	50.00	-14.08
9	A	21.569	8.67	44.41	60.00	-15.59	34.77	50.00	-15.23
10	A	21.835	8.70	43.91	60.00	-16.09	34.39	50.00	-15.61
11	B	0.168	6.85	46.97	65.07	-18.10	38.75	55.07	-16.32
12	B	18.341	8.43	36.46	60.00	-23.54	30.30	50.00	-19.70
13	B	18.768	8.46	37.82	60.00	-22.18	31.36	50.00	-18.64
14	B	19.250	8.50	38.96	60.00	-21.04	32.43	50.00	-17.57
15	B	19.790	8.53	38.17	60.00	-21.83	31.71	50.00	-18.29
16	B	20.144	8.57	38.08	60.00	-21.92	32.05	50.00	-17.95
17	B	21.118	8.71	37.32	60.00	-22.68	30.79	50.00	-19.21
18	B	21.139	8.72	37.27	60.00	-22.73	30.69	50.00	-19.31
19	B	21.221	8.73	37.10	60.00	-22.90	30.64	50.00	-19.36
20	B	22.181	8.86	36.60	60.00	-23.40	30.72	50.00	-19.28

Table 6-42. Line Conducted Data with 802.11a UNII Band 4

Notes:

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 157. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- L1 = Phase; N = Neutral
- Corr. (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBμV) = QP/AV Analyzer/Receiver Level (dBμV) + Corr. (dB)
- Margin (dB) = QP/AVLimit (dBμV) - QP/AV Level (dBμV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 94 of 95

7.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **LGE Portable Handset FCC ID: ZNFD959** is in compliance with Part 15E of the FCC Rules.

FCC ID: ZNFD959		FCC Pt. 15.407 802.11a/n/ac UNII MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1309161887.ZNF	Test Dates: 9/19 - 11/4/2013	EUT Type: Portable Handset		Page 95 of 95