



HCT CO., LTD.

CERTIFICATION DIVISION  
74, SEOICHEON-RO, 578BEON-GIL, MAJANG-MYEON, ICHEON-SI, GYEONGGI-DO, KOREA  
TEL: +82 31 645 6300 FAX: +82 31 645 6401

## EMI CERTIFICATION REPORT

**Applicant:**

LG Electronics MobileComm U.S.A., Inc.  
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

**Date of Issue: December 12, 2013**

**Test Report No.: HCTE1312FE08**

**Test Site: HCT CO., LTD.**  
**HCT FRN: 0005-8664-21**

**FCC ID:**

**ZNFD959**

Rule Part(s) / Standard(s) : FCC PART 15 Subpart B Class B  
Equipment Type : Cellular/PCS GSM/WCDMA and LTE phone with Bluetooth, WLAN and RFID  
Model Name : D959  
Additional Model Name : LG-D959, LGD959, LG-D959BK, LGD959BK, D959BK, LG-D959TS, D959TS, LGD959TS  
Port / Connector(s) : USB / Earphone Port  
Date of Test : December 06, 2013 - December 11, 2013

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4/2003. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862

  
Report prepared by

: Gu-Cheol Yoon  
Test Engineer of EMC Team

  
Approved by

: Kyeong-Sun Kim  
Manager of EMC Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

## DOCUMENT HISTORY

---

The revision history for this document is shown in table.

Version	Date	Description
HCTE1312FE08	December 12, 2013	Initial Release

---

## TABLE OF CONTENTS

---

	<b>PAGE</b>
1. GENERAL INFORMATION .....	4
1.1 Product Description .....	4
1.2 Related Submittal(s) / Grant(s).....	4
1.3 Tested System Details.....	5
1.4 Cable Description .....	6
1.5 Noise Suppression Parts on Cable. (I/O cable) .....	6
1.6 Test Methodology .....	7
1.7 Test Facility .....	7
1.8 Frequency Range of Radiated Measurements .....	7
2. SYSTEM TEST CONFIGURATION.....	8
2.1 Configuration of Test System.....	8
3. PRELIMINARY TEST.....	9
3.1 Conducted Emission Test .....	9
3.2 Radiated Emission Test .....	9
4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY .....	10
4.1 Conducted Emission Test .....	10
4.2 Radiated Emission Test .....	11
5. FIELD STRENGTH CALCULATION .....	24
6. TEST EQUIPMENT.....	25
7. CONCLUSION .....	26

**ATTACHMENT: TEST SETUP PHOTOGRAPHS**

## 1. GENERAL INFORMATION

### 1.1 Product Description

Equipment Under Test is manufactured by **LG Electronics MobileComm U.S.A., Inc.**  
 Its basic purpose is used for communications.

<b>Model Name</b>	D959
<b>Additional Model</b>	LG-D959, LGD959, LG-D959BK, LGD959BK, D959BK, LG-D959TS, D959TS, LGD959TS
<b>FCC ID</b>	ZNFD959
<b>EUT Type</b>	Multi-Band GSM/EDGE/WCDMA/LTE Phone with WLAN, Bluetooth, and RFID
<b>TX Frequency</b>	824.20 MHz to 848.80 MHz (GSM 850) 1 850.20 MHz to 1 909.80 MHz (GSM 1 900) 826.40 MHz to 846.60 MHz (WCDMA 850) 1 852.4 MHz to 1 907.6 MHz (WCDMA 1 900) 1712.4 MHz to 1752.6 MHz (WCDMA 1 700) 1 850 MHz to 1 910 MHz (LTE B2) 1 710 MHz to 1 755 MHz (LTE B4) 704 MHz to 716 MHz (LTE B17)
<b>RX Frequency</b>	869.20 MHz to 893.80 MHz (GSM 850) 1 930.20 MHz to 1 989.80 MHz (GSM 1 900) 871.40 MHz to 891.60 MHz (WCDMA 850) 1 932.4 MHz to 1 987.6 MHz (WCDMA 1 900) 2 112.4 MHz to 2 152.6 MHz (WCDMA 1 700) 1 930 MHz to 1 990 MHz (LTE B2) 2 110 MHz to 2 155 MHz (LTE B4) 734 MHz to 746 MHz (LTE B17)

### 1.2 Related Submittal(s) / Grant(s)

Original submittal only.

### 1.3 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Model Name	Manufacturer	FCC ID / DoC	Connected To
EUT	D959	LG	ZNFD959	Notebook PC Ear-phone
USB cable (USB2.0)	EAD62588801	CRESYN	-	E.U.T Notebook PC
USB cable (USB2.0)	EAD62329305	BROAD	-	E.U.T Notebook PC
USB cable (USB2.0)	EAD62329304	KSD	-	E.U.T Notebook PC
USB cable (USB3.0)	EAD62488701	BROAD	-	E.U.T Notebook PC
Ear-phone	EAB62950101	LG	-	E.U.T
Notebook PC	ProBook6570b	H.P	DoC	EUT Notebook PC adaptor
Notebook PC adaptor	PPP012D-S	DELTA Electronics (JIANGSU)LTD	-	Notebook PC
Gateway	MV440	Axesstel	PH7MV440	Notebook PC, Adaptor
Mouse	Serial 2 button mouse	Radio shack	FSUGMZE3	Notebook PC
Adaptor	DA-60M12	Yang Ming Industrial	-	Gateway
RJ45 cable	-	-	-	Notebook PC, Gateway

### 1.4 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (m)
EUT	Micro USB (USB2.0)	Y	Y	(P,D)1.2
	Micro USB (USB3.0)	Y	Y	(P,D)0.1
	Ear-phone	N/A	Y	(D)1.2
Notebook PC	RJ 45	N/A	N	(D)1.5
	Serial (Mouse)	N/A	Y	(D)1.8
	DC in	N	N/A	(P)1.8
Gateway	DC in	N	N/A	(P)1.8

\* The marked "(D)" means the data cable and "(P)" means the power cable.

### 1.5 Noise Suppression Parts on Cable. (I/O cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
EUT	Micro USB (USB2.0)	N	N/A	Y	Both End
	Micro USB (USB3.0)	N	N/A	Y	Both End
	Ear-phone	N	N/A	Y	EUT End
Notebook PC	RJ 45	N	N/A	N	N/A
	Serial (Mouse)	N	N/A	Y	Notebook PC End

## 1.6 Test Methodology

Both Conducted and Radiated testing was performed according to the procedures in ANSI C63.4/2003. Radiated testing was performed at an antenna to EUT distance of 3 m.

## 1.7 Test Facility

Chamber used to collect the test data is located at the 74, SEOICHEON-RO, 578BEON-GIL, MAJANG-MYEON, ICHEON-SI, GYEONGGI-DO, KOREA. Those measurement facilities are constructed in conformance with the requirements of C63.4/2003.

Measurement Facilities	Reg. No.
Radiated Field strength measurement facility (3m)	90661 (June 21, 2011)
Radiated Field strength measurement facility (10m)	90661 (June 21, 2011)

## 1.8 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower

## 2. SYSTEM TEST CONFIGURATION

### 2.1 Configuration of Test System


#### 2.1.1 Conducted Emission Test

EUT was connected to LISN via Notebook PC adaptor and Base Station. Preliminary Power Line Conducted Emission tests were performed by using the procedure in ANSI C63.4/2003 7.2.3 to determine the worst operating conditions.

#### 2.1.2 Radiated Emission Test

Preliminary Radiated Emission tests were performed by using the procedure in ANSI C63.4/2003 8.3.1.1 to determine the worst operating condition. Final Radiated Emission tests were performed at 3 m semi-anechoic chamber.

[ Configuration of Tested System ]

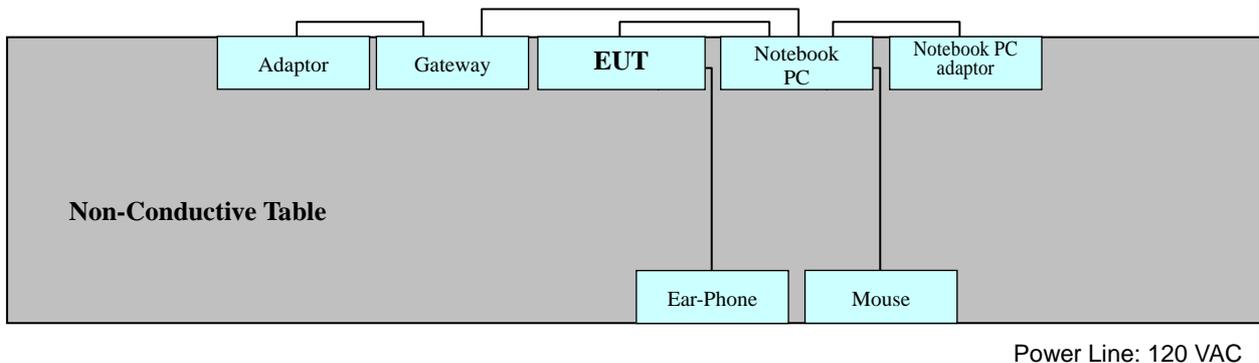

### **3. PRELIMINARY TEST**

---

#### **3.1 Conducted Emission Test**

- It was tested Data Communication mode, after connecting all peripheral devices.

**Operation Mode:**       Data Communication mode

#### **3. 2 Radiated Emission Test**

- It was tested Data Communication mode, after connecting all peripheral devices.

**Operation Mode:**       Data Communication mode

## 4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY

### 4.1 Conducted Emission Test

The following table shows the highest levels of conducted emissions on both polarization of hot and neutral line.

Limit Apply to	: FCC PART 15 Subpart B Class B
Detector	: Quasi-Peak, Average (6 dB Bandwidth: 9 kHz)
Operation Mode	: Data Communication mode
USB Type (USB2.0)	: KSD (EAD62329304)
Temperature	: 19.7°C
Humidity Level	: 40.2 %
Test Date	: December 06, 2013

Frequency (MHz)	Transd (dB)	Conductor	Quasi-Peak			Average		
			Limit	Measurement Level	Result Level	Limit	Measurement Level	Result Level
			(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dBuV)
0.150	10.0	N	66	39.8	49.8	56	-	-
0.158	10.0	N	66	38.7	48.7	56	17.0	27.0
0.158	9.8	H	66	37.6	47.4	56	-	-
0.470	9.8	H	57	28.7	38.5	47	-	-
0.474	10.0	N	56	28.9	38.9	46	-	-
0.500	9.8	H	56	27.4	37.2	46	15.3	25.1

※ **NOTE:** Refer to page 11 to page 14 for details.

1. The worst-case emissions are reported.
2. Line H = Hot, Line N = Neutral
3. Transd = LISN factor + Cable Loss factor


**HCT**

**EMC**

EUT: D959  
 Manufacturer: LG  
 Operating Condition: DATA MODE  
 Test Site: SHIELD ROOM  
 Operator: GC YOON  
 Test Specification: FCC PART15B  
 Comment: H (KSD CABLE)  
 Start of Test: 2013-12-06 / 10:31:14오전

**SCAN TABLE: "FCC CLASS B(H)"**

Short Description:			FCC CLASS B(H)				Transducer
Start	Stop	Step	Detector	Meas. Time	IF Bandw.		
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				

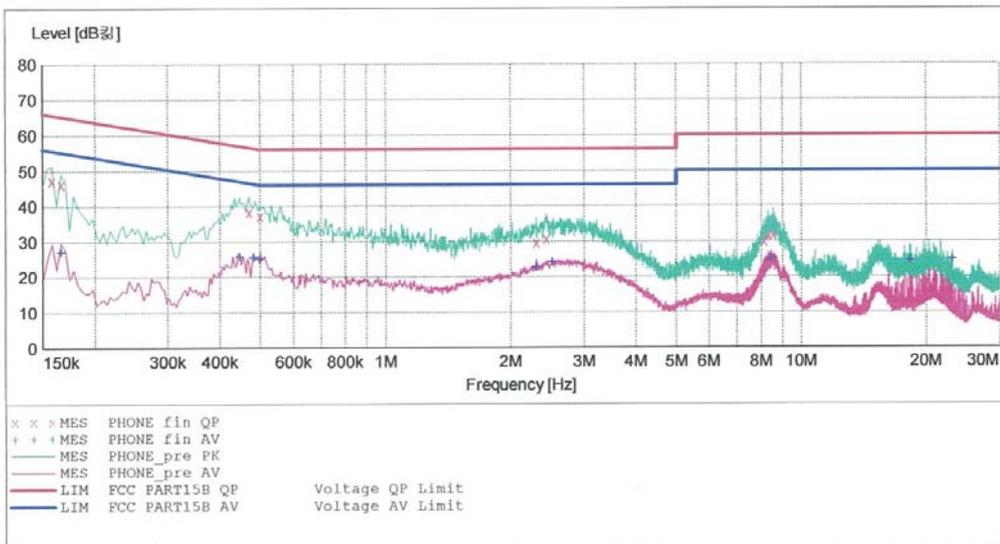

**MEASUREMENT RESULT: "PHONE\_fin QP"**

2013-12-06 10:33오전

Frequency MHz	Level dB	Transd dB	Limit dB	Margin dB	Line	PE
0.158001	47.40	9.8	66	18.2	---	---
0.166001	46.20	9.8	65	18.9	---	---
0.470001	38.50	9.8	57	18.0	---	---
0.500000	37.20	9.8	56	18.8	---	---
2.308000	29.70	10.0	56	26.3	---	---
2.436000	30.70	10.0	56	25.3	---	---
8.148000	29.90	10.4	60	30.1	---	---
8.308000	31.50	10.4	60	28.5	---	---
8.576000	31.90	10.4	60	28.1	---	---

**MEASUREMENT RESULT: "PHONE\_fin AV"**

2013-12-06 10:33오전

Frequency MHz	Level dB <sub>μV</sub>	Transd dB	Limit dB <sub>μV</sub>	Margin dB	Line	PE
0.166001	27.00	9.8	55	28.2	---	---
0.446001	25.80	9.8	47	21.1	---	---
0.482001	25.50	9.8	46	20.8	---	---
0.500000	25.10	9.8	46	20.9	---	---
2.308000	22.60	10.0	46	23.4	---	---
2.524000	24.10	10.0	46	21.9	---	---
8.448000	24.80	10.4	50	25.2	---	---
18.244000	24.50	10.9	50	25.5	---	---
23.128000	24.70	11.1	50	25.3	---	---


**HCT**

**EMC**

EUT: D959  
 Manufacturer: LG  
 Operating Condition: DATA MODE  
 Test Site: SHIELD ROOM  
 Operator: GC YOON  
 Test Specification: FCC PART15B  
 Comment: N (KSD CABLE)  
 Start of Test: 2013-12-06 / 10:27:50오전

**SCAN TABLE: "FCC CLASS B(N)"**

Short Description:			FCC CLASS B(N)				Transducer
Start	Stop	Step	Detector	Meas. Time	IF Bandw.		
Frequency	Frequency	Width					
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				

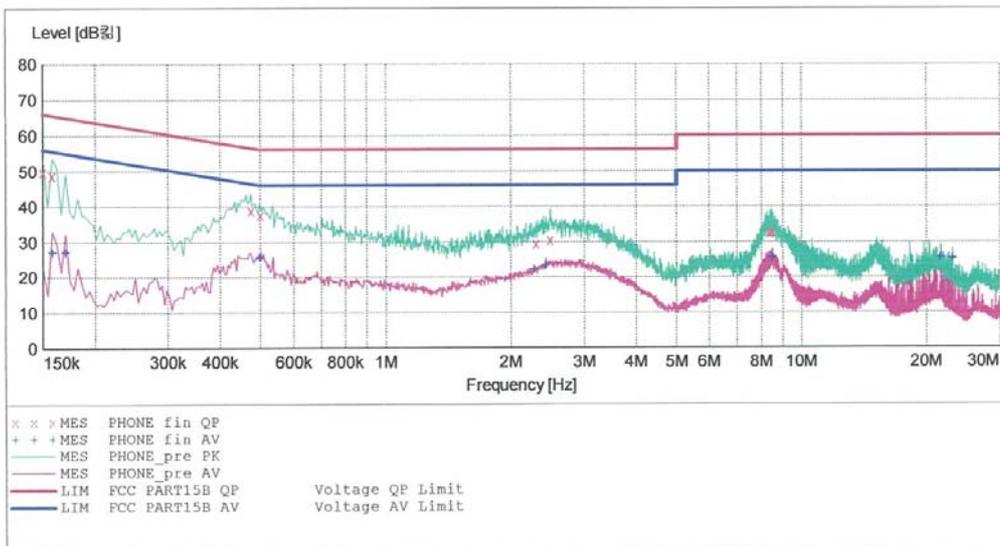

**MEASUREMENT RESULT: "PHONE\_fin QP"**

2013-12-06 10:30오전

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.150001	49.80	10.0	66	16.2	---	---
0.158001	48.70	10.0	66	16.9	---	---
0.474001	38.90	10.0	56	17.6	---	---
0.500000	37.70	10.0	56	18.3	---	---
2.300000	29.50	10.2	56	26.5	---	---
2.488000	30.60	10.2	56	25.4	---	---
8.388000	32.60	10.6	60	27.4	---	---
8.480000	32.80	10.6	60	27.2	---	---
8.492000	32.70	10.6	60	27.3	---	---

**MEASUREMENT RESULT: "PHONE\_fin AV"**

2013-12-06 10:30 오전

Frequency MHz	Level dB <sub>μV</sub>	Transd dB	Limit dB <sub>μV</sub>	Margin dB	Line	PE
0.158001	27.00	10.0	56	28.6	---	---
0.170001	27.10	10.0	55	27.8	---	---
0.498001	25.60	10.0	46	20.4	---	---
0.500000	25.50	10.0	46	20.5	---	---
2.284000	22.30	10.2	46	23.7	---	---
2.432000	23.50	10.2	46	22.5	---	---
8.528000	25.40	10.6	50	24.6	---	---
21.664000	25.40	11.3	50	24.6	---	---
23.128000	25.20	11.4	50	24.8	---	---

Limit Apply to : FCC PART 15 Subpart B Class B

Detector : Quasi-Peak, Average (6 dB Bandwidth: 9 kHz)

Operation Mode : Data Communication mode

USB Type (USB3.0) : BROAD (EAD62488701)

Temperature : 19.7°C

Humidity Level : 40.2 %

Test Date : December 06, 2013

Frequency	Transd	Conductor	Quasi-Peak			Average		
			Limit	Measurement Level	Result Level	Limit	Measurement Level	Result Level
(MHz)	(dB)		(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dBuV]
0.154	9.8	H	66	36.8	46.6	56	-	-
0.150	10.0	N	66	38.8	48.8	56	-	-
0.494	10.0	N	56	30.5	40.5	46	-	-
0.498	9.8	H	56	30.0	39.8	46	-	-
0.500	9.8	H	56	29.9	39.7	46	-	-
0.500	10.0	N	56	30.1	40.1	46	14.4	24.4

※ **NOTE:** Refer to page 16 to page 19 for details.

1. Line H = Hot, Line N = Neutral
2. Transd = LISN factor + Cable Loss factor


**HCT**

**EMC**

EUT: D959  
 Manufacturer: LG  
 Operating Condition: DATA MODE (USB 3.0)  
 Test Site: SHIELD ROOM  
 Operator: GC YOON  
 Test Specification: FCC PART15B  
 Comment: H  
 Start of Test: 2013-12-06 / 10:03:01오전

**SCAN TABLE: "FCC CLASS B(H)"**

Short Description:				FCC CLASS B(H)			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				

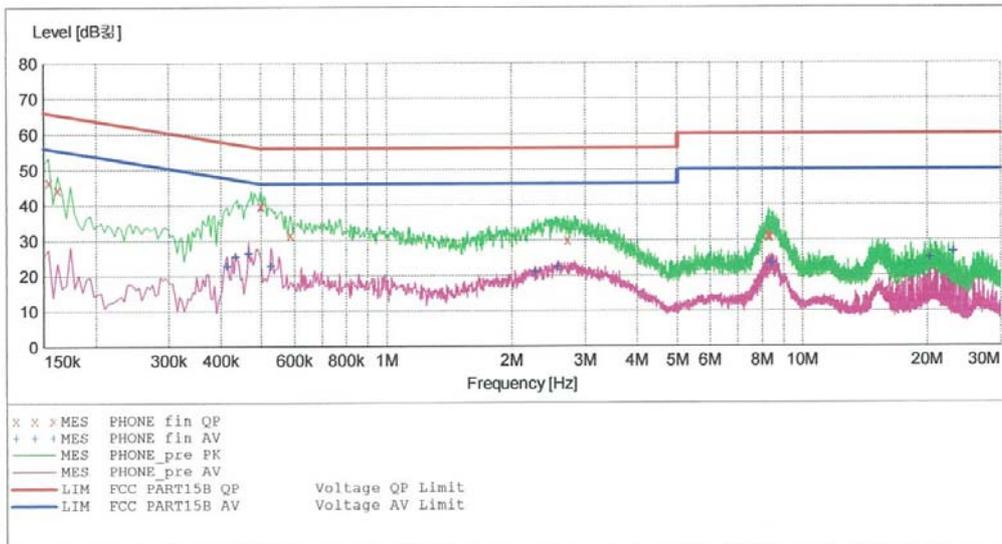

**MEASUREMENT RESULT: "PHONE\_fin\_QP"**

2013-12-06 10:05오전

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.154001	46.60	9.8	66	19.2	---	---
0.162001	44.30	9.8	65	21.0	---	---
0.498001	39.80	9.8	56	16.2	---	---
0.500000	39.70	9.8	56	16.3	---	---
0.588000	31.60	9.8	56	24.4	---	---
2.728000	30.10	10.0	56	25.9	---	---
8.280000	31.20	10.4	60	28.8	---	---
8.292000	31.60	10.4	60	28.4	---	---
8.348000	31.20	10.4	60	28.8	---	---

**MEASUREMENT RESULT: "PHONE\_fin AV"**

2013-12-06 10:05오전

Frequency MHz	Level dB <sub>μV</sub>	Transd dB	Limit dB <sub>μV</sub>	Margin dB	Line	PE
0.414001	22.60	9.8	48	25.0	---	---
0.434001	25.30	9.8	47	21.8	---	---
0.466001	26.20	9.8	47	20.3	---	---
0.528000	22.60	9.8	46	23.4	---	---
2.284000	21.10	10.0	46	24.9	---	---
2.592000	22.40	10.0	46	23.6	---	---
8.468000	23.50	10.4	50	26.5	---	---
20.260000	24.80	10.9	50	25.2	---	---
23.128000	26.70	11.1	50	23.3	---	---


**HCT**

**EMC**

EUT: D959  
 Manufacturer: LG  
 Operating Condition: DATA MODE (USB 3.0)  
 Test Site: SHIELD ROOM  
 Operator: GC YOON  
 Test Specification: FCC PART15B  
 Comment: N  
 Start of Test: 2013-12-06 / 10:06:23오전

**SCAN TABLE: "FCC CLASS B(N)"**

Short Description:			FCC CLASS B(N)				
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				

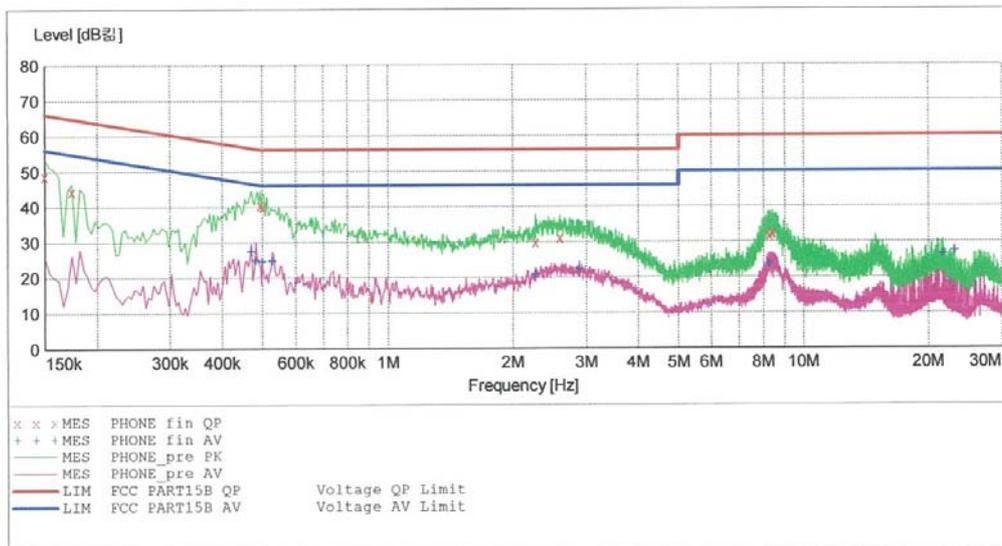

**MEASUREMENT RESULT: "PHONE\_fin QP"**

2013-12-06 10:09오전

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.150001	48.80	10.0	66	17.2	---	---
0.174001	44.40	10.0	65	20.4	---	---
0.494001	40.50	10.0	56	15.6	---	---
0.500000	40.10	10.0	56	15.9	---	---
2.272000	29.80	10.2	56	26.2	---	---
2.596000	31.10	10.2	56	24.9	---	---
8.280000	31.90	10.6	60	28.1	---	---
8.404000	32.30	10.6	60	27.7	---	---
8.432000	32.30	10.6	60	27.7	---	---

**MEASUREMENT RESULT: "PHONE\_fin AV"**

2013-12-06 10:09오전

Frequency MHz	Level dB <sub>μV</sub>	Transd dB	Limit dB <sub>μV</sub>	Margin dB	Line	PE
0.470001	27.30	10.0	47	19.2	---	---
0.482001	24.80	10.0	46	21.5	---	---
0.500000	24.40	10.0	46	21.6	---	---
0.528000	24.70	10.0	46	21.3	---	---
2.272000	20.90	10.2	46	25.1	---	---
2.888000	22.20	10.2	46	23.8	---	---
8.280000	23.60	10.6	50	26.4	---	---
21.664000	26.40	11.3	50	23.6	---	---
23.128000	27.20	11.4	50	22.8	---	---

## 4.2 Radiated Emission Test

The following table shows the highest levels of Radiated Emissions on both polarization of horizontal and vertical.

### -For measurement below 1 GHz

Limit Apply to : FCC PART 15 Subpart B Class B

Detector : Quasi-Peak (6 dB Bandwidth: 120 kHz)

Operation Mode : Data Communication mode

USB Type (USB2.0) : KSD (EAD62329304)

Temperature : 20.7°C

Humidity Level : 31.8 %

Test Date : December 11, 2013

Frequency (MHz)	Reading (dBUV)	Polarity (H/V)	Antenna Height (m)	Correction Factor		Limit (dBUV/m)	Level (dBUV/m)	Margin (dB)
				Antenna (dB/m)	Cable (dB)			
214.7	22.72	V	1.0	10.37	4.23	43.5	37.32	6.18
265.0	18.57	V	1.0	12.26	4.41	46.0	35.24	10.76
330.6	18.26	H	1.0	14.09	4.65	46.0	37.00	9.00
365.0	15.31	V	1.0	14.85	4.76	46.0	34.92	11.08
625.0	11.66	V	1.0	19.97	5.39	46.0	37.02	8.98
900.0	8.12	V	1.0	23.38	5.92	46.0	37.42	8.58

※ **NOTE:**

1. The worst-case emissions are reported.
2. Polarity H = Horizontal, Polarity V = Vertical

Limit Apply to : FCC PART 15 Subpart B Class B

Detector : Quasi-Peak (6 dB Bandwidth: 120 kHz)

Operation Mode : Data Communication mode

USB Type (USB3.0) : BROAD (EAD62488701)

Temperature : 20.7°C

Humidity Level : 31.8 %

Test Date : December 11, 2013

Frequency (MHz)	Reading (dBUV)	Polarity (H/V)	Antenna Height (m)	Correction Factor		Limit (dBUV/m)	Level (dBUV/m)	Margin (dB)
				Antenna (dB/m)	Cable (dB)			
108.2	13.84	V	1.0	10.27	3.81	43.5	27.92	15.58
212.7	19.49	H	1.0	10.29	4.22	43.5	34.00	9.50
256.2	17.58	V	1.0	11.97	4.37	46.0	33.92	12.08
316.1	14.25	H	1.0	13.77	4.60	46.0	32.62	13.38
362.4	19.27	V	1.4	14.80	4.75	46.0	38.82	7.18
625.0	10.56	V	1.0	19.97	5.39	46.0	35.92	10.08

※ NOTE:

1. Polarity H = Horizontal, Polarity V = Vertical

**-For measurement above 1 GHz**

Limit Apply to : FCC PART 15 Subpart B Class B

Detector : Peak mode: Peak (RBW: 1 MHz, VBW: 1 MHz)  
 : Average mode: Peak (RBW: 1 MHz, VBW: 10 Hz)

Operation Mode : Data Communication mode

USB Type (USB2.0) : KSD (EAD62329304)

Temperature : 20.6°C

Humidity Level : 32.7 %

Test Date : December 10, 2013

Frequency (GHz)	Peak			POL	Average		
	Total (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)		Total (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
2.2413	51.7	74	22.3	V	36.4	54	17.6
2.4169	48.1	74	25.9	V	29.2	54	24.8

**※ NOTE:**

1. The worst-case emissions are reported.
2. Measurement above 1 GHz was performed from 1 GHz to the 5<sup>th</sup> harmonic of highest fundamental frequency. Test was measured by 12 GHz.

Limit Apply to : FCC PART 15 Subpart B Class B

Detector : Peak mode: Peak (RBW: 1 MHz, VBW: 1 MHz)  
 : Average mode: Peak (RBW: 1 MHz, VBW: 10 Hz)

Operation Mode : Data Communication mode

USB Type (USB3.0) : BROAD (EAD62488701)

Temperature : 20.6°C

Humidity Level : 32.7 %

Test Date : December 10, 2013

Frequency (GHz)	Peak			POL	Average		
	Total (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)		Total (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
1.9938	59.6	74	14.4	H	28.9	54	25.1
2.4334	54.8	74	19.2	H	31.1	54	22.9
2.4583	62.2	74	11.8	H	31.6	54	22.4
2.9998	54.4	74	19.6	H	31.6	54	22.4

※ NOTE:

1. Measurement above 1 GHz was performed from 1 GHz to the 5<sup>th</sup> harmonic of highest fundamental frequency. Test was measured by 12 GHz.

## 5. FIELD STRENGTH CALCULATION

The field strength is calculated by adding the antenna factor and cable factor.  
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 21.5 dB $\mu$ V is obtained. The antenna factor of 7.4 dB/m and a cable factor of 1.1 dB are added. The 30 dB $\mu$ V/m value is mathematically converted to its corresponding level in  $\mu$ V/m.

$$FS = 21.5 + 7.4 + 1.1 = 30 \text{ dB}\mu\text{V/m}$$

### [Radiated Emission Limits]

Frequency of Emission (MHz)	Field Strength	
	$\mu$ V/m	dB $\mu$ V/m
30 to 88	100	40.0
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

## 6. TEST EQUIPMENT

<u>Type</u>	<u>Manufacturer</u>	<u>Model Name</u>	<u>Serial Number</u>	<u>Calibration Cycle</u>	<u>Next CAL Date</u>
<b><u>Conducted Emission</u></b>					
<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESCI	100584	1 year	2014.04.25
<input checked="" type="checkbox"/> LISN	EMCO	3816/2SH	9706-1070	1 year	2014.04.26
<input checked="" type="checkbox"/> LISN	Rohde & Schwarz	ENV216	100073	1 year	2014.02.06
<input type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESCI	100033	1 year	2014.06.23
<input type="checkbox"/> LISN	Rohde & Schwarz	ESH3-Z5	100282	1 year	2014.07.03
<input type="checkbox"/> Attenuator	Rohde & Schwarz	ESH3-Z2	357.8810.352	1 year	2014.07.03
<b><u>Radiated Emission (30 Mhz to 1 GHz)</u></b>					
<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESI40	831564103	1 year	2014.04.16
<input checked="" type="checkbox"/> Trilog Antenna	Schwarzbeck	VULB9160	3301	2 year	2014.12.17
<input checked="" type="checkbox"/> Antenna master	HD GmbH	MA240	240/520	N/A	-
<input checked="" type="checkbox"/> Turn Table	HD GmbH	2090	9702/1224	N/A	-
<input type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESU 26	100241	1 year	2014.07.01
<input type="checkbox"/> Trilog Antenna	Schwarzbeck	VULB9168	185	2 year	2015.04.16
<input type="checkbox"/> Antenna master	INNCO Systems	MA4000-EP	MA4000/283	N/A	-
<input type="checkbox"/> Turn Table	INNCO Systems	DT3000-3T	DT3000/69	N/A	-
<b><u>Radiated Emission (1 GHz to 12 GHz)</u></b>					
<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESI40	831564103	1 year	2014.04.16
<input checked="" type="checkbox"/> Antenna master	HD GmbH	MA240	240/520	N/A	-
<input checked="" type="checkbox"/> Turn Table	HD GmbH	2090	9702/1224	N/A	-
<input checked="" type="checkbox"/> Power Amplifier	CERNEX	CBLU1183540	21690	1 year	2014.07.12
<input checked="" type="checkbox"/> Horn Antenna	Schwarzbeck	BBHA 9120D	296	2 year	2014.12.13
<input type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESU 26	100241	1 year	2014.07.01
<input type="checkbox"/> Antenna master	INNCO Systems	MA4000-EP	MA4000/283	N/A	-
<input type="checkbox"/> Turn Table	INNCO Systems	DT3000-3T	DT3000/69	N/A	-

## 7. CONCLUSION

---

The data collected shows that the **EUT type: Multi-Band GSM/EDGE/WCDMA/LTE Phone with WLAN, Bluetooth, and RFID, FCC ID: ZNFD959, Model: D959** complies with §15.107 and §15.109 of the FCC rules.