

FCC DTS REPORT

FCC Certification

Applicant Name:

LG Electronics MobileComm U.S.A., Inc.

Address:

1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Date of Issue:

April 20, 2016

Test Site/Location:

HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-R-1604-F061

HCT FRN: 0005866421

IC Recognition No.: 5944A-5

FCC ID : ZNFDM02H

APPLICANT : LG Electronics MobileComm U.S.A., Inc.

Model(s): DM-02H

Additional Model(s): DS1604

EUT Type: Cellular/PCS GSM/WCDMA Phone with WLAN, Bluetooth and NFC

Peak Output Power: Wi-Fi 802.11b(19.20 dBm) / Wi-Fi 802.11g (25.02 dBm) /
Wi-Fi 802.11n_20 MHz (21.80dBm)

Frequency Range: 2412 MHz - 2462 MHz (2.4 GHz Band)

Modulation type: CCK/DSSS/OFDM

FCC Classification: Digital Transmission System(DTS)

FCC Rule Part(s): Part 15.247

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C. 853(a)



**Report prepared by
: Seoul Ki Lee**

Test Engineer of RF Team



**Approved by
: Jong Seok Lee**

Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1604-F061	April 20, 2016	- First Approval Report

Table of Contents

1. GENERAL INFORMATION	4
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE	5
3.3 GENERAL TEST PROCEDURES	5
3.4 DESCRIPTION OF TEST MODES	5
4. INSTRUMENT CALIBRATION.....	6
5. FACILITIES AND ACCREDITATIONS	6
5.1 FACILITIES	6
5.2 EQUIPMENT	6
6. ANTENNA REQUIREMENTS	7
7. MEASUREMENT UNCERTAINTY	8
8. SUMMARY TEST OF RESULTS	9
9. TEST RESULT	10
9.1 DUTY CYCLE.....	10
9.2 6dB BANDWIDTH.....	12
9.3 OUTPUT POWER (802.11b/g/n)	16
9.4 POWER SPECTRAL DENSITY (802.11b/g/n).....	23
9.5 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS	27
9.6 RADIATED MEASUREMENT.....	40
9.6.1 RADIATED SPURIOUS EMISSIONS.....	40
9.6.2 RADIATED RESTRICTED BAND EDGES	73
9.7 POWERLINE CONDUCTED EMISSIONS	89
10. LIST OF TEST EQUIPMENT	94
10.1 LIST OF TEST EQUIPMENT(Conducted Test)	94
10.2 LIST OF TEST EQUIPMENT(Radiated Test).....	95

1. GENERAL INFORMATION

Applicant: LG Electronics MobileComm U.S.A., Inc
Address: 1000 Sylvan Avenue, Englewood Cliffs NJ 07632
FCC ID: ZNFDM02H
EUT Type: Cellular/PCS GSM/WCDMA Phone with WLAN, Bluetooth and NFC
Model(s): DM-02H
Additional Model (s): DS1604

Date(s) of Tests: March 29, 2016 ~ April 15, 2016
Place of Tests: HCT Co., Ltd.
 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea
 (IC Recognition No. : 5944A-5)

2. EUT DESCRIPTION

Model	DM-02H	
Additional Model	DS1604	
EUT Type	Cellular/PCS GSM/WCDMA Phone with WLAN, Bluetooth and NFC	
Power Supply	DC 3.85 V	
Battery Information	Model: BL-T25 Type: Li-ion Battery	
Frequency Range	TX: 2412 MHz ~ 2462 MHz RX: 2412 MHz ~ 2462 MHz	
Max. RF Output Power	Peak	Wi-Fi 802.11b(19.20 dBm) / Wi-Fi 802.11g (25.02 dBm) / Wi-Fi 802.11n_20 MHz (21.80dBm)
	Average	Wi-Fi 802.11b(15.84 dBm) / Wi-Fi 802.11g (13.85 dBm) / Wi-Fi 802.11n_20 MHz (9.74 dBm)
Modulation Type	DSSS/CCK(802.11b), OFDM(802.11g, 802.11n)	
Antenna Specification	Manufacturer: LS Mtron Co., Ltd. Antenna type: INTERNAL ANTENNA Peak Gain : -1.75 dBi	

3. TEST METHODOLOGY

FCC KDB 558074 D01 DTS Meas Guidance v03r05 dated April 8, 2016 entitled "Guidance for Performing Compliance Measurements on Digital Transmission Systems(DTS) and the measurement procedure described in ANSI C63.10(Version : 2013) 'the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices'.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 8 of ANSI C63.10. (Version: 2013)

Conducted Antenna Terminal

See Section from 9.1 to 9.2.(KDB 558074 v03r05)

3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2006).

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated July 07, 2015 (Registration Number: 90661)

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

* The antennas of this E.U.T are permanently attached.

*The E.U.T Complies with the requirement of §15.203

7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	6.07

8. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	CONDUCTED	PASS
Conducted Maximum Peak Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge(Out of Band Emissions)	§15.247(d)	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 8.7		PASS
Radiated Spurious Emissions	§15.205, 15.209	cf. Section 8.6.1	RADIATED	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 8.6.2		PASS

9. TEST RESULT


9.1 DUTY CYCLE

■ TEST PROCEDURE

According to KDB 558074 v03r05)6)b), issued 04/08/2016)

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

■ TEST CONFIGURATION

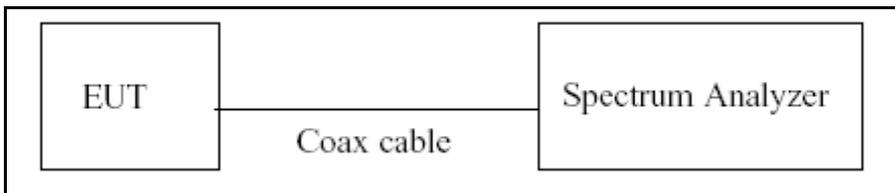

■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. We tested according to the zero-span measurement method, 6.0)b) in KDB 558074 v03r05

The largest available value of RBW is 8 MHz and VBW is 50 MHz. The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.

1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on} / T_{total} and Duty Cycle Factor = $10 \cdot \log(1/\text{Duty Cycle})$

■ Duty Cycle Factor

Mode	Data Rate	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
b	1 Mbps	1.000	1.000	1.00000000	0.000
	2 Mbps	6.207	6.223	0.99742889	0.011
	5.5 Mbps	2.373	2.396	0.99040067	0.042
	11 Mbps	1.288	1.303	0.98848810	0.050
g	6 Mbps	2.034	2.049	0.99267936	0.032
	9 Mbps	1.364	1.379	0.98912255	0.047
	12 Mbps	1.025	1.047	0.97898758	0.092
	18 Mbps	0.693	0.708	0.97881356	0.093
	24 Mbps	0.525	0.543	0.96685083	0.146
	36 Mbps	0.357	0.375	0.95200000	0.214
	48 Mbps	0.270	0.288	0.93750000	0.280
	54 Mbps	0.244	0.262	0.93129771	0.309
n_ 20MHz BW	MCS Index 0	1.880	1.895	0.99208443	0.035
	MCS Index 1	0.950	0.970	0.97938144	0.090
	MCS Index 2	0.645	0.665	0.96992481	0.133
	MCS Index 3	0.488	0.506	0.96442688	0.157
	MCS Index 4	0.336	0.354	0.94915254	0.227
	MCS Index 5	0.256	0.274	0.93430657	0.295
	MCS Index 6	0.232	0.250	0.92800000	0.325
	MCS Index 7	0.212	0.230	0.92173913	0.354

Note : Duty Cycle Factor = 10*log(1/Duty Cycle). where, Duty Cycle = T_{on} / T_{total}


9.2 6dB BANDWIDTH

Test Requirements and limit, §15.247(a)(2)

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

The minimum permissible 6dB bandwidth is 500 kHz.

■ TEST CONFIGURATION

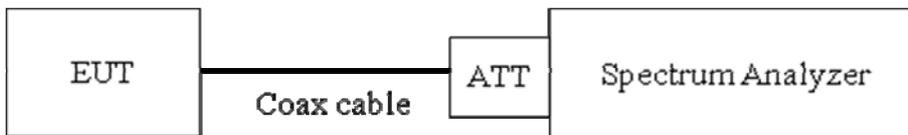

■ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 8.1 in KDB 558074 v03r05)

RBW = 100 kHz

VBW $\geq 3 \times$ RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Allow the trace to stabilize

Note : We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

■ TEST RESULTS

Conducted 6dB Bandwidth Measurements for 802.11b

802.11b Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	9.062	0.500	Pass
2437	6	8.115	0.500	Pass
2462	11	8.103	0.500	Pass

Conducted 6dB Bandwidth Measurements for 802.11g

802.11g Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	16.43	0.500	Pass
2437	6	16.40	0.500	Pass
2462	11	16.45	0.500	Pass


Conducted 6dB Bandwidth Measurements for 802.11n_20 MHz BW

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	17.61	0.500	Pass
2437	6	17.62	0.500	Pass
2462	11	17.64	0.500	Pass

Note : In order to simplify the report, attached plots were only the most wide 6 dB BW channel.

▣ RESULT PLOTS


6dB Bandwidth plot (802.11b-CH 1)

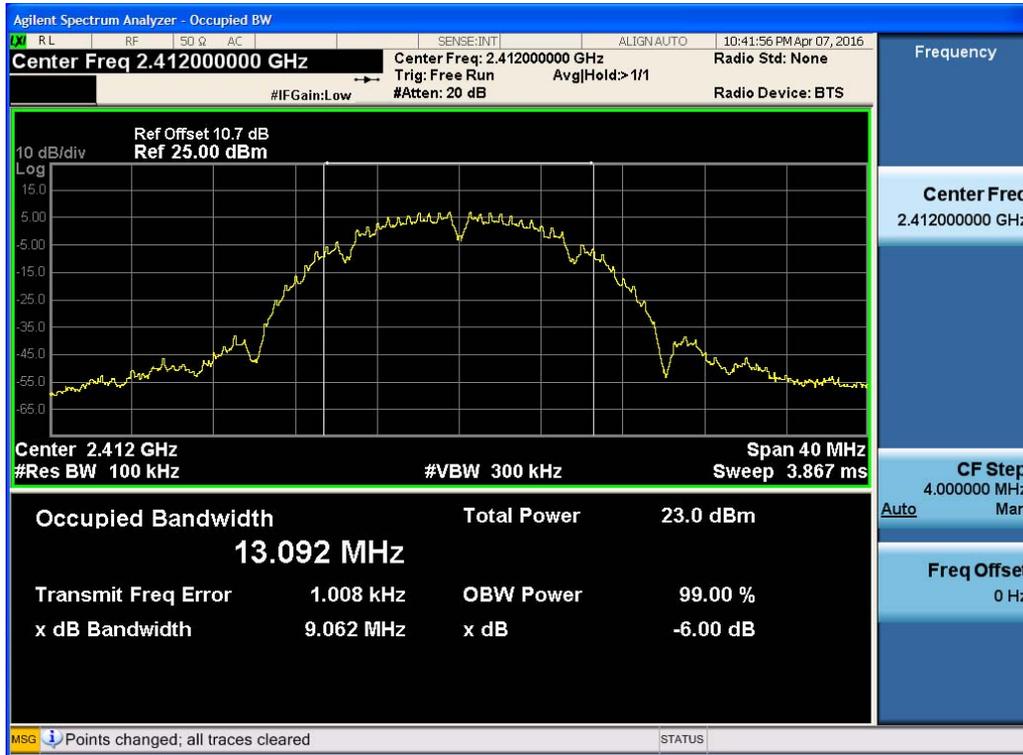

6dB Bandwidth plot (802.11g-CH 11)



6dB Bandwidth plot (802.11n_20 MHz BW-CH 11)

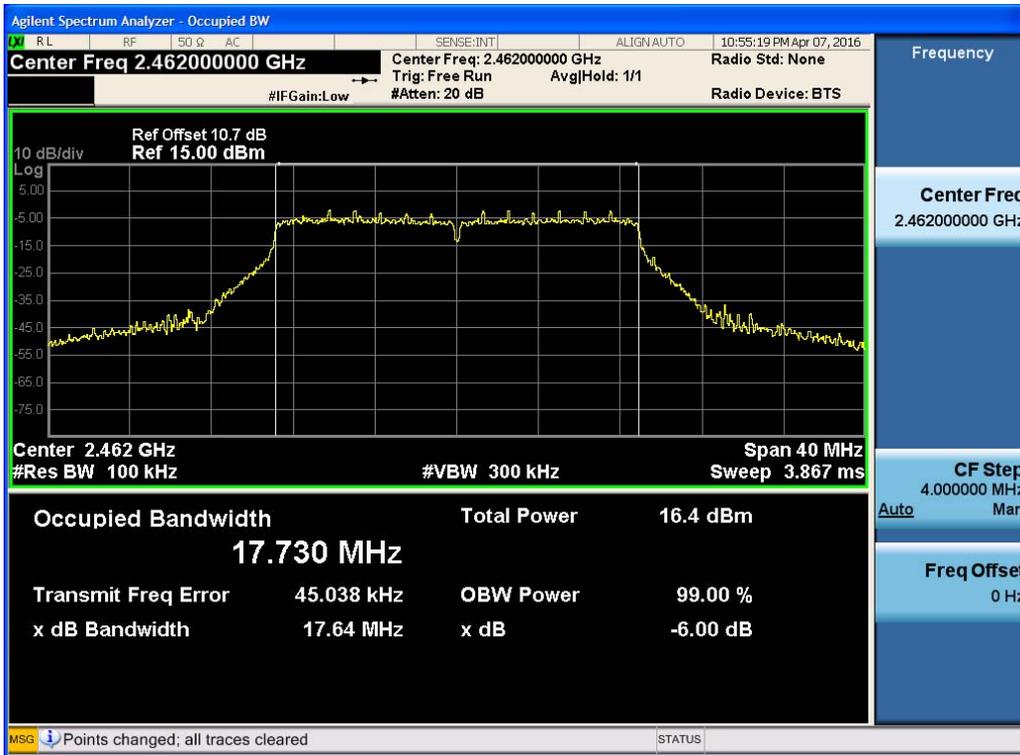


9.3 OUTPUT POWER (802.11b/g/n)

Test Requirements and limit, §15.247(b)(3)

The transmitter output is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt.

■ TEST CONFIGURATION(20 MHz BW)



■ TEST PROCEDURE(20 MHz BW)

- Peak Power (Procedure 9.1.2 in KDB 558074 v03r05)
 1. Measure the peak power of the transmitter.
- Average Power (Procedure 9.2.3.1 in KDB 558074 v03r05)
 1. Measure the duty cycle.
 2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 3. Add 10 log (1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Note :

1. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. So, 10.7 dB is offset for 2.4 GHz Band.

Actual value of loss for the attenuator and cable combination is below table.

Band	Frequency[MHz]	Loss[dB]
2.4 GHz	2412	10.65
	2437	10.65
	2462	10.66

(Actual value of loss for the attenuator and cable combination)

■ TEST RESULTS-Peak

Conducted Output Power Measurements (802.11b Mode)

802.11b Mode		Rate [Mbps]	Measured Power[dBm]	Limit [dBm]
Frequency[MHz]	Channel No.			
2412	1	1 Mbps	18.90	30
		2 Mbps	18.70	30
		5.5 Mbps	18.85	30
		11 Mbps	19.01	30
2437	6	1 Mbps	18.88	30
		2 Mbps	18.83	30
		5.5 Mbps	18.98	30
		11 Mbps	19.20	30
2462	11	1 Mbps	18.50	30
		2 Mbps	18.52	30
		5.5 Mbps	18.68	30
		11 Mbps	18.87	30

Conducted Output Power Measurements (802.11g Mode)

802.11g Mode		Rate [Mbps]	Measured Power[dBm]	Limit [dBm]
Frequency[MHz]	Channel No.			
2412	1	6 Mbps	23.78	30
		9 Mbps	24.16	30
		12 Mbps	24.05	30
		18 Mbps	23.99	30
		24 Mbps	24.01	30
		36 Mbps	24.16	30
		48 Mbps	23.87	30
		54 Mbps	24.04	30
2437	6	6 Mbps	24.87	30
		9 Mbps	24.23	30
		12 Mbps	24.42	30
		18 Mbps	24.38	30
		24 Mbps	25.02	30
		36 Mbps	24.70	30
		48 Mbps	24.56	30
		54 Mbps	24.43	30
2462	11	6 Mbps	23.81	30
		9 Mbps	23.75	30
		12 Mbps	23.89	30
		18 Mbps	23.90	30
		24 Mbps	23.93	30
		36 Mbps	23.73	30
		48 Mbps	24.07	30
		54 Mbps	24.14	30

Conducted Output Power Measurements (802.11n_20MHz BW Mode)

802.11n Mode		MCS Index	Measured Power[dBm]	Limit [dBm]
Frequency[MHz]	Channel No.			
2412	1	0	21.28	30
		1	21.24	30
		2	21.39	30
		3	21.08	30
		4	21.46	30
		5	21.18	30
		6	21.10	30
		7	21.38	30
2437	6	0	20.63	30
		1	21.04	30
		2	20.54	30
		3	21.26	30
		4	21.45	30
		5	21.19	30
		6	21.03	30
		7	21.80	30
2462	11	0	20.53	30
		1	20.61	30
		2	20.64	30
		3	20.78	30
		4	21.02	30
		5	20.96	30
		6	20.82	30
		7	20.86	30

■ TEST RESULTS-Average

Conducted Output Power Measurements (802.11b Mode)

802.11b Mode		Rate [Mbps]	Measured Power[dBm]	Duty Cycle Factor [dB]	Measured Power(dBm) + Duty Cycle Factor[dB]	Limit [dBm]
Frequency [MHz]	Channel No.					
2412	1	1 Mbps	15.80	0.000	15.80	30
		2 Mbps	15.58	0.011	15.59	30
		5.5 Mbps	15.74	0.042	15.78	30
		11 Mbps	15.71	0.050	15.76	30
2437	6	1 Mbps	15.84	0.000	15.84	30
		2 Mbps	15.81	0.011	15.82	30
		5.5 Mbps	15.80	0.042	15.84	30
		11 Mbps	15.78	0.050	15.83	30
2462	11	1 Mbps	15.53	0.000	15.53	30
		2 Mbps	15.42	0.011	15.43	30
		5.5 Mbps	15.52	0.042	15.56	30
		11 Mbps	15.47	0.050	15.52	30

Conducted Output Power Measurements (802.11g Mode)

802.11g Mode		Rate [Mbps]	Measured Power[dBm]	Duty Cycle Factor [dB]	Measured Power(dBm) + Duty Cycle Factor[dB]	Limit [dBm]
Frequency [MHz]	Channel No.					
2412	1	6 Mbps	13.80	0.032	13.83	30
		9 Mbps	13.79	0.047	13.84	30
		12 Mbps	13.74	0.092	13.83	30
		18 Mbps	13.66	0.093	13.75	30
		24 Mbps	13.62	0.146	13.77	30
		36 Mbps	13.57	0.214	13.78	30
		48 Mbps	13.48	0.280	13.76	30
		54 Mbps	13.43	0.309	13.74	30
2437	6	6 Mbps	13.73	0.032	13.76	30
		9 Mbps	13.78	0.047	13.83	30
		12 Mbps	13.76	0.092	13.85	30
		18 Mbps	13.65	0.093	13.74	30
		24 Mbps	13.58	0.146	13.73	30
		36 Mbps	13.49	0.214	13.70	30
		48 Mbps	13.47	0.280	13.75	30
		54 Mbps	13.44	0.309	13.75	30
2462	11	6 Mbps	13.40	0.032	13.43	30
		9 Mbps	13.68	0.047	13.73	30
		12 Mbps	13.31	0.092	13.40	30
		18 Mbps	13.53	0.093	13.62	30
		24 Mbps	13.53	0.146	13.68	30
		36 Mbps	13.10	0.214	13.31	30
		48 Mbps	13.05	0.280	13.33	30
		54 Mbps	12.97	0.309	13.28	30

Conducted Output Power Measurements (802.11n_20MHz BW Mode)

802.11n Mode		MCS Index	Measured Power[dBm]	Duty Cycle Factor [dB]	Measured Power(dBm) + Duty Cycle Factor[dB]	Limit [dBm]
Frequency [MHz]	Channel No.					
2412	1	0	9.66	0.035	9.69	30
		1	9.65	0.090	9.74	30
		2	9.60	0.133	9.73	30
		3	9.52	0.157	9.68	30
		4	9.43	0.227	9.66	30
		5	9.34	0.295	9.64	30
		6	9.29	0.325	9.61	30
		7	9.25	0.354	9.60	30
2437	6	0	9.40	0.035	9.43	30
		1	9.49	0.090	9.58	30
		2	9.32	0.133	9.45	30
		3	9.24	0.157	9.40	30
		4	9.18	0.227	9.41	30
		5	9.19	0.295	9.49	30
		6	9.28	0.325	9.61	30
		7	9.05	0.354	9.40	30
2462	11	0	9.18	0.035	9.21	30
		1	9.20	0.090	9.29	30
		2	9.16	0.133	9.29	30
		3	9.20	0.157	9.36	30
		4	8.98	0.227	9.21	30
		5	8.85	0.295	9.15	30
		6	8.82	0.325	9.14	30
		7	8.78	0.354	9.13	30


9.4 POWER SPECTRAL DENSITY (802.11b/g/n)

Test Requirements and limit, §15.247(e)

The peak power spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

Minimum Standard – the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

■ TEST CONFIGURATION

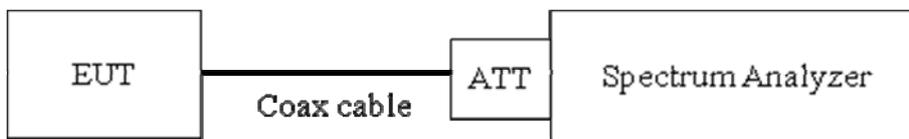

■ TEST PROCEDURE

We tested according to Procedure 10.2 in KDB 558074 v03r05

The spectrum analyzer is set to :

Set analyzer center frequency to DTS channel center frequency.

Span = 1.5 times the DTS channel bandwidth.

RBW = 3 kHz ≤ RBW ≤ 100 kHz.

VBW ≥ 3 x RBW.

Sweep = auto couple

Detector = peak

Trace Mode = max hold

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

■ Sample Calculation

PSD = Reading Value + ATT loss + Cable loss(1 ea)

Output Power = -5 dBm + 10 dB + 0.8 dB = 5.8 dBm

Note :

1. Spectrum reading values are not plot data. The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. So, 10.7 dB is offset for 2.4 GHz Band.

Actual value of loss for the attenuator and cable combination is below table.

Band	Frequency(MHz)	Loss(dB)
2.4 GHz	2412	10.65
	2437	10.65
	2462	10.66

(Actual value of loss for the attenuator and cable combination)

■ TEST RESULTS


Conducted Power Density Measurements

Frequency [MHz]	Channel No.	Mode	Test Result		
			PSD [dBm]	Limit [dBm]	Pass/Fail
2412	1	802.11b	-7.402	8	Pass
2437	6		-6.959	8	Pass
2462	11		-7.367	8	Pass
2412	1	802.11g	-10.594	8	Pass
2437	6		-11.264	8	Pass
2462	11		-11.381	8	Pass
2412	1	802.11n	-15.005	8	Pass
2437	6	20MHz	-16.275	8	Pass
2462	11	BW	-16.301	8	Pass

Note : In order to simplify the report, attached plots were only the highest PSD channel.

▣ RESULT PLOTS


Power Spectral Density (802.11b-CH 6)

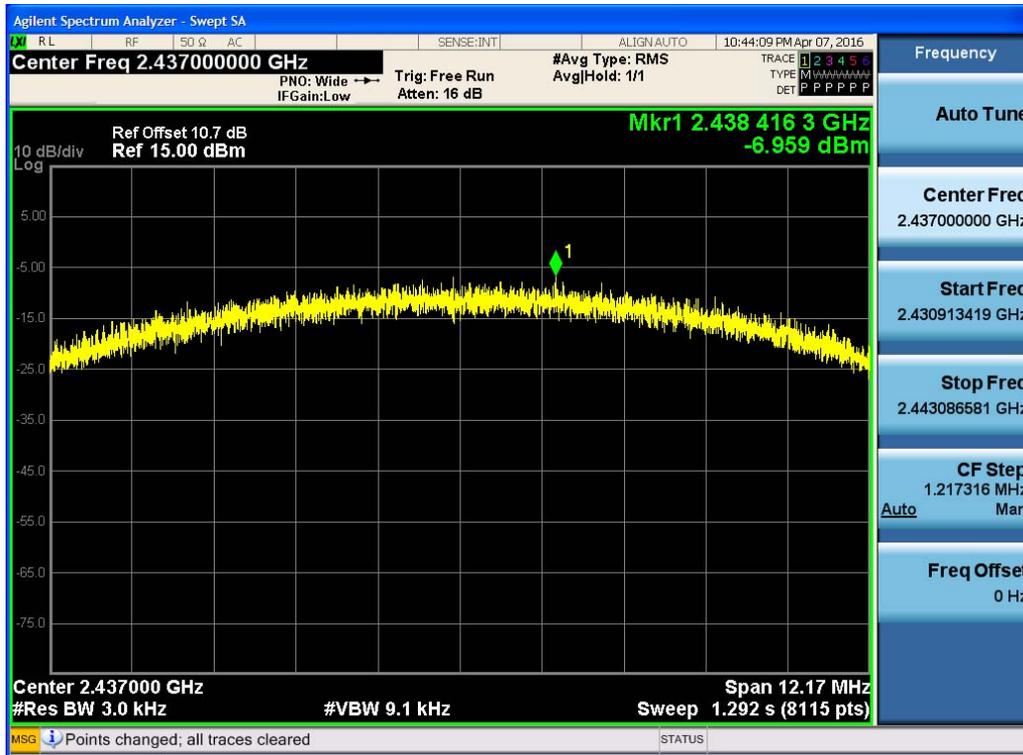

Power Spectral Density (802.11g-CH 1)



Power Spectral Density (802.11n_20MHz BW -CH 1)

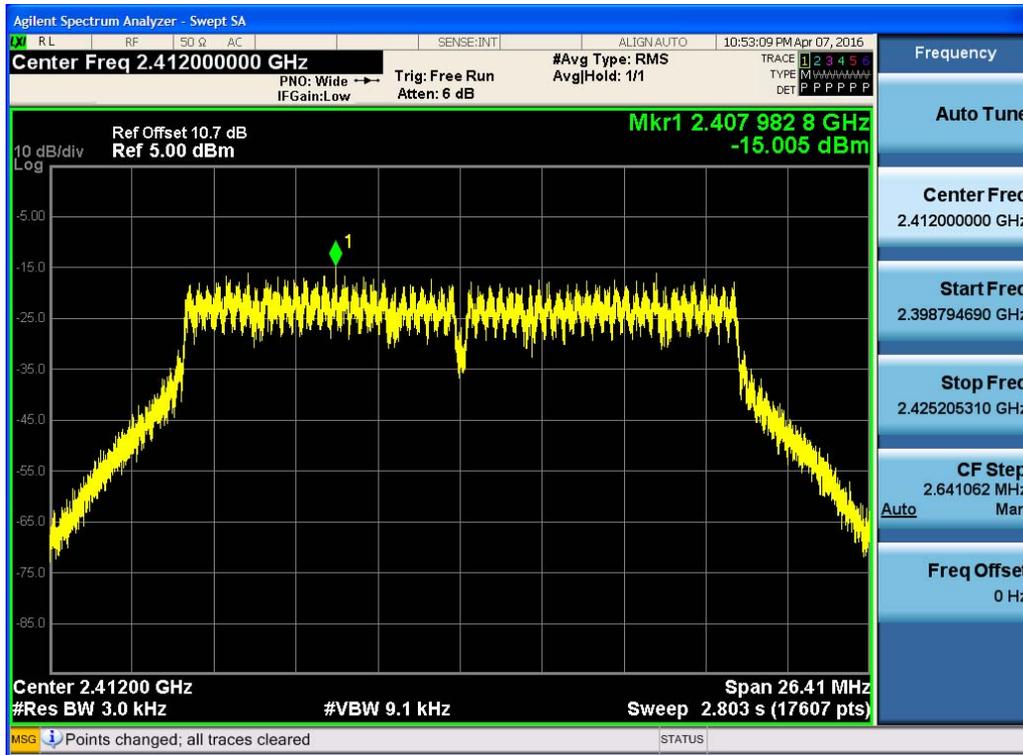


9.5 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

Test Requirements and limit, §15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit : 20 dBc

■ TEST CONFIGURATION



■ TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. (Procedure 11.0 in KDB 558074 v03r05)

RBW = 100 kHz

VBW $\geq 3 \times$ RBW

Set span to encompass the spectrum to be examined

Detector = Peak

Trace Mode = max hold

Sweep time = auto couple

Ensure that the number of measurement points \geq Span/RBW

Allow trace to fully stabilize.

Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 10th harmonic range with the transmitter set to the lowest, middle, and highest channels.

Note :

1. The maximum peak conducted output power procedure was used to demonstrate compliance as described in 9.1(KDB558074 v03r05), so the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak

PSD level in 100 kHz (i.e., 20 dBc).

2. The band edge results in plot is already including the actual values of loss for the attenuator and cable combination.
3. Spectrum offset = Attenuator loss + Cable loss
4. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. So, 10.7 dB is offset for 2.4 GHz Band. Actual value of loss for the attenuator and cable combination is below table.

Band	Frequency(MHz)	Loss(dB)
2.4 GHz	2412	10.65
	2437	10.65
	2462	10.66

(Actual value of loss for the attenuator and cable combination)

5. In case of conducted spurious emissions test, please check factors blow table.
6. In order to simplify the report, attached plots were only the worst case channel.

■ FACTORS FOR FREQUENCY

Freq(MHz)	Factor(dB)
30	11.30
100	9.83
200	10.19
300	10.13
400	10.23
500	10.25
600	10.32
700	10.35
800	10.35
900	10.34
1000	10.39
2000	10.64
2400*	10.65
2500*	10.67
3000	10.68
4000	10.89
5000	11.07
6000	11.06
7000	11.35


8000	11.32
9000	11.48
10000	11.56
11000	11.56
12000	11.68
13000	11.83
14000	11.90
15000	11.98
16000	12.04
17000	12.02
18000	12.08
19000	12.07
20000	12.14
21000	12.17
22000	12.31
23000	12.60
24000	12.34
25000	12.53

Note : 1. ** is fundamental frequency range.

2. Factor = Cable loss + Attenuator loss

▣ RESULT PLOTS

Band Edge (802.11b-CH1)

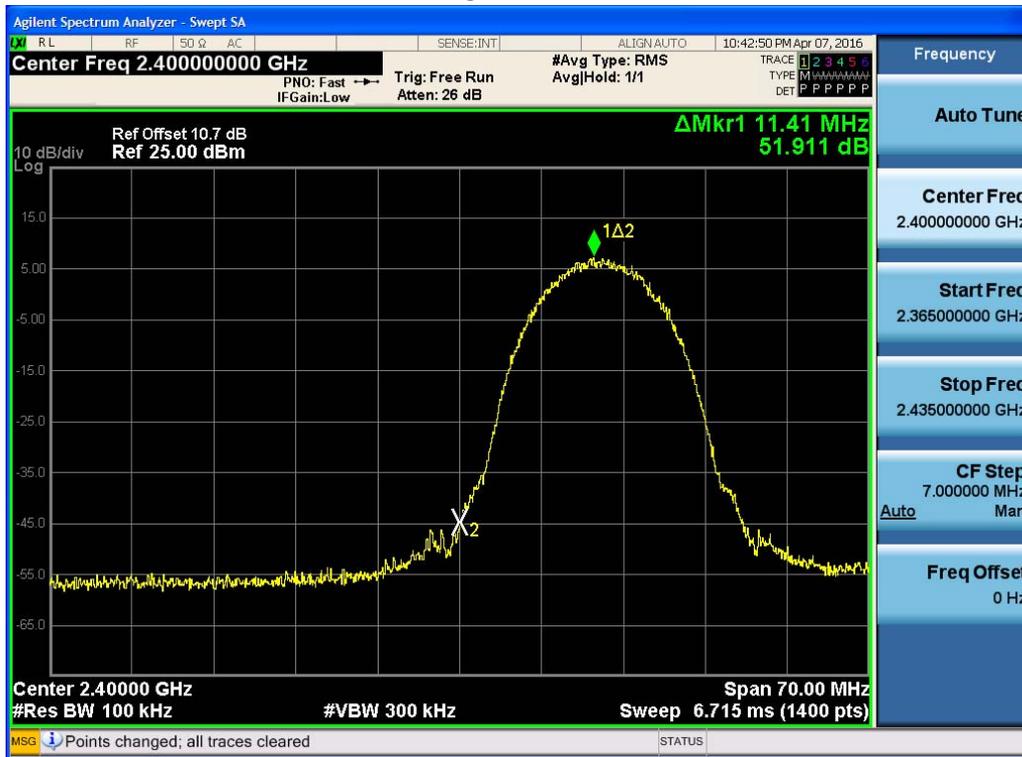

Band Edge (802.11b-CH11)



Band Edge (802.11g-CH1)



Band Edge (802.11g-CH11)



Band Edge (802.11n_20MHz-CH1)




Band Edge (802.11n_20MHz-CH11)




30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11g_Ch.6_24 Mbps)

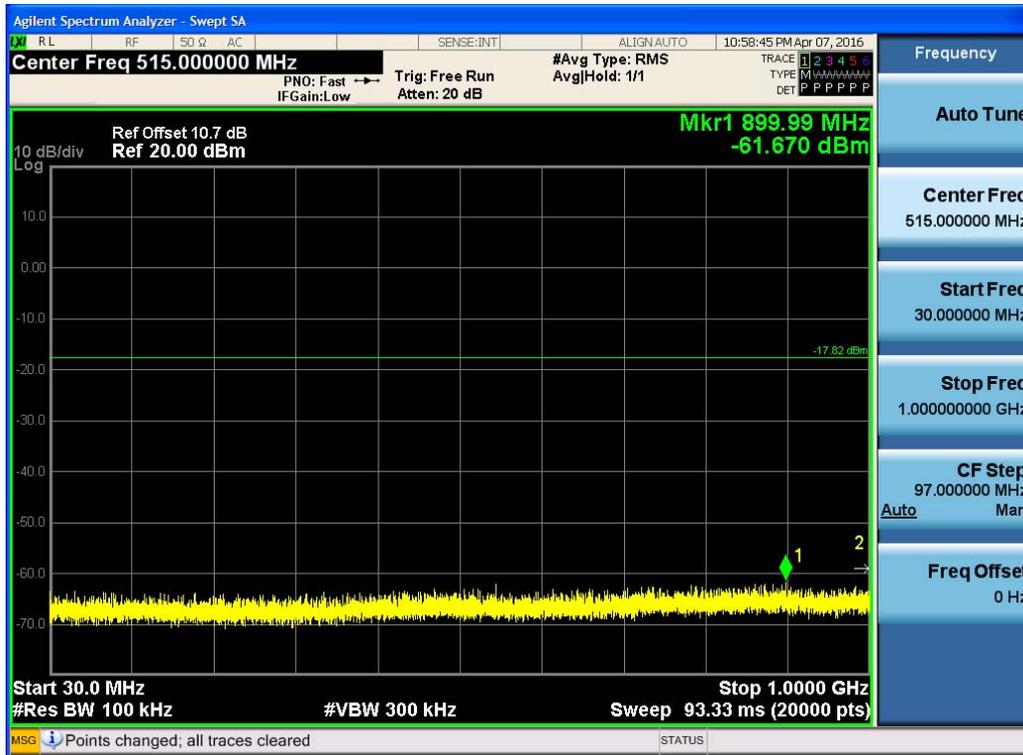


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11g_Ch.6_24 Mbps)

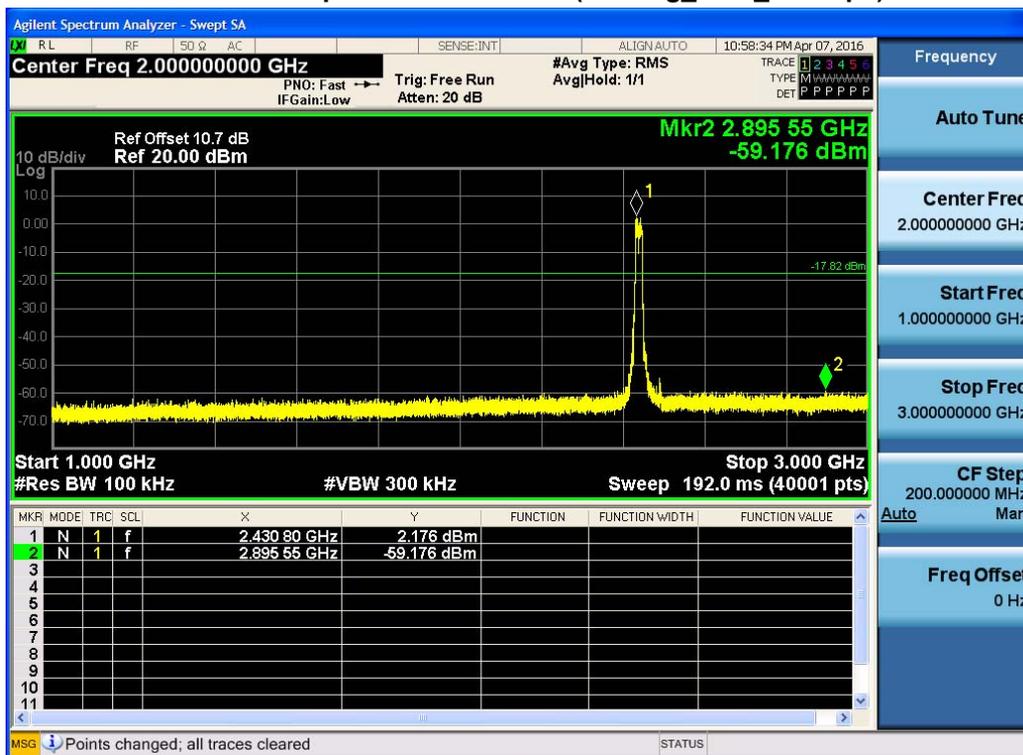


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11g_Ch.6_24 Mbps)

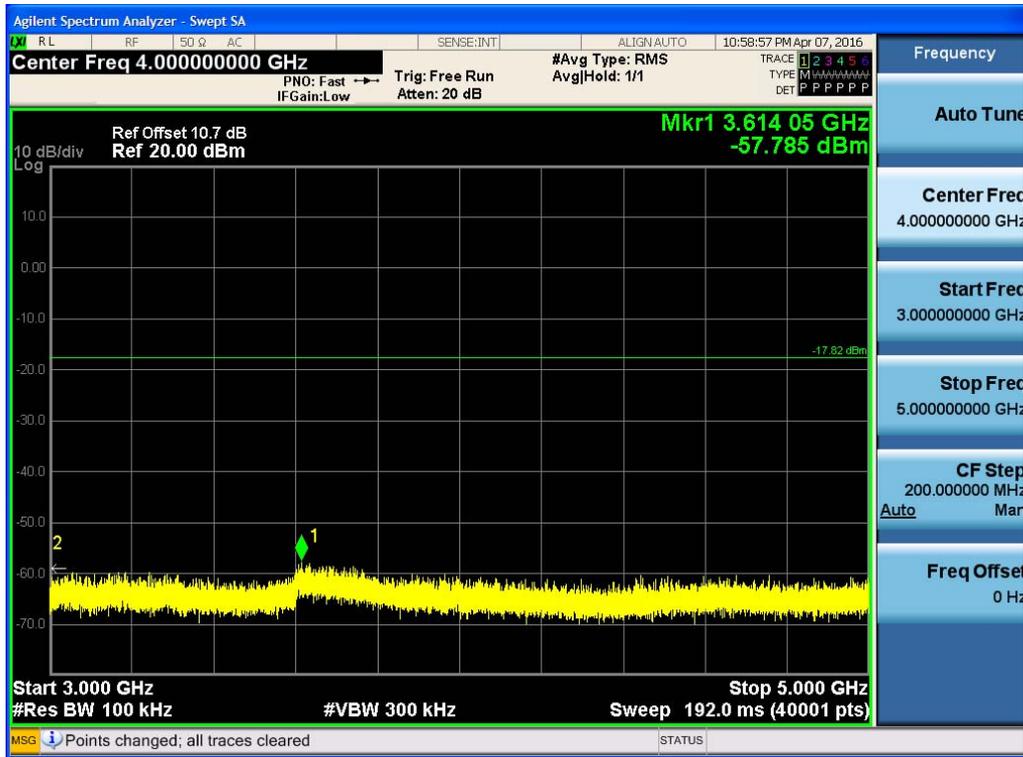


5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11g_Ch.6_24 Mbps)

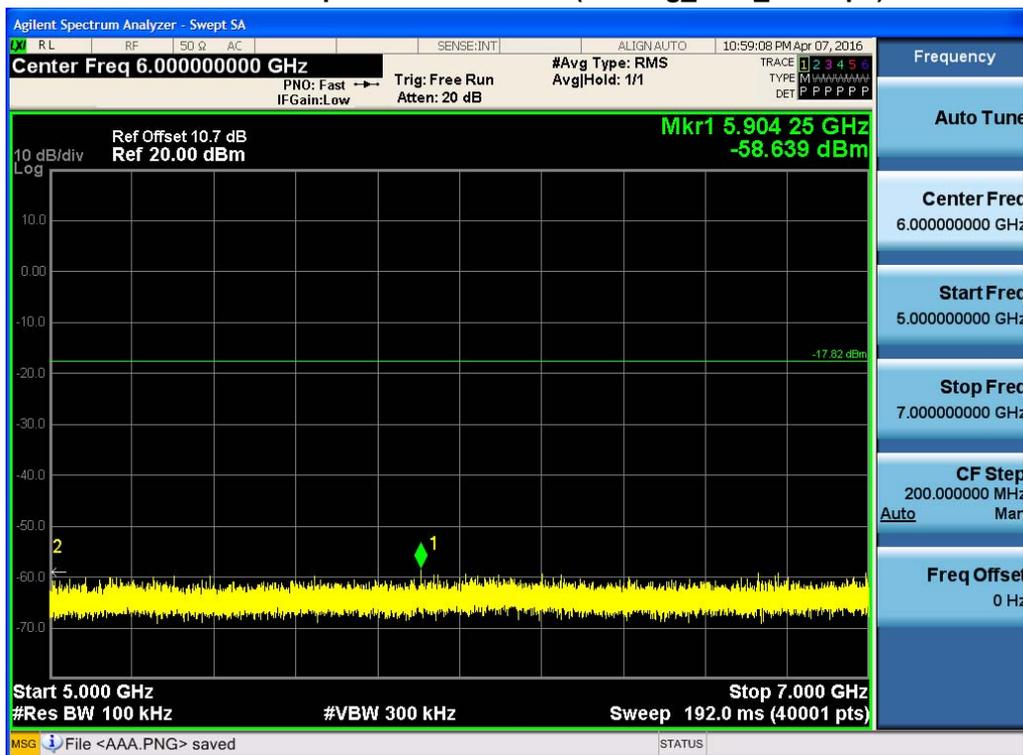


7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11g_Ch.6_24 Mbps)

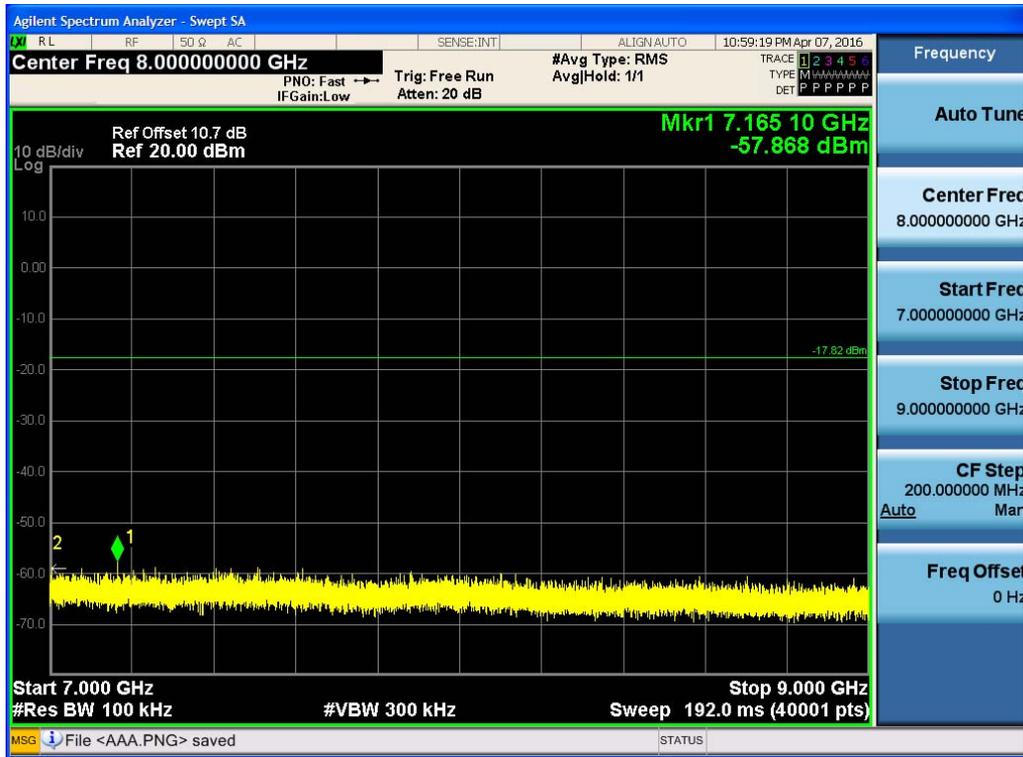


9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11g_Ch.6_24 Mbps)

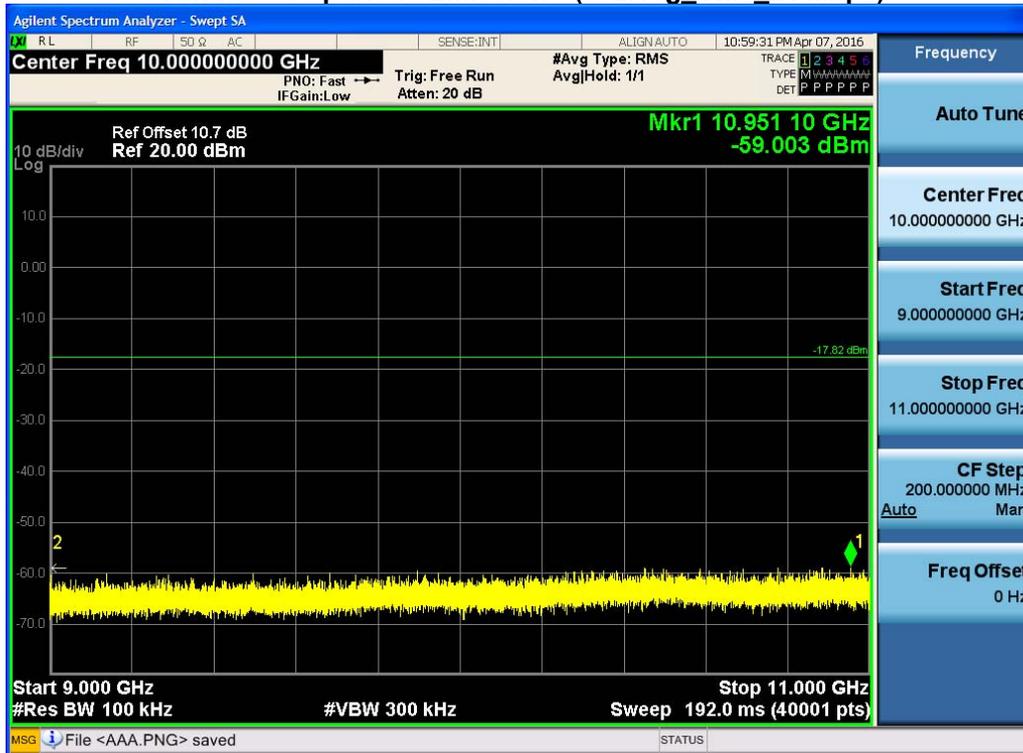


11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11g_Ch.6_24 Mbps)

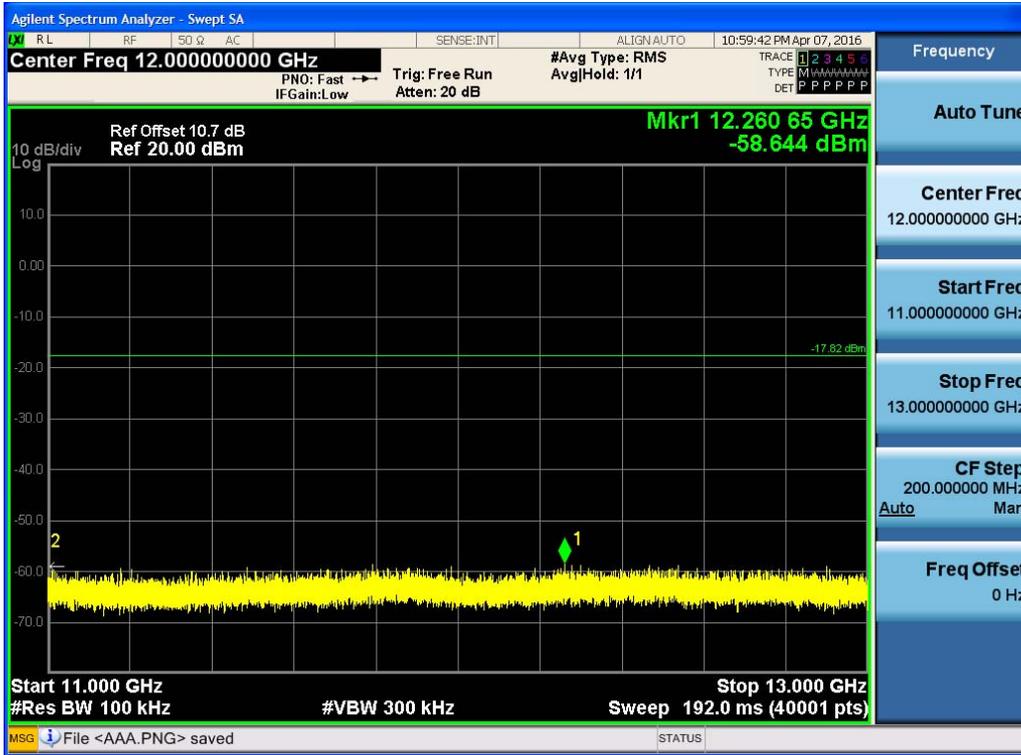


13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11g_Ch.6_24 Mbps)

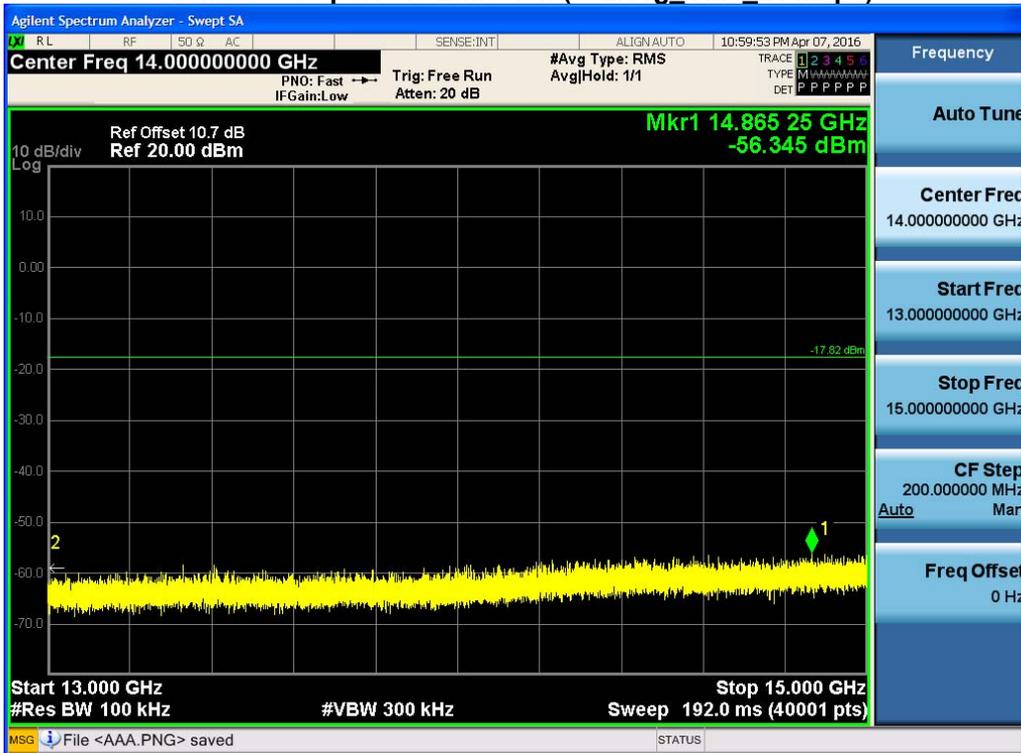


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11g_Ch.6_24 Mbps)

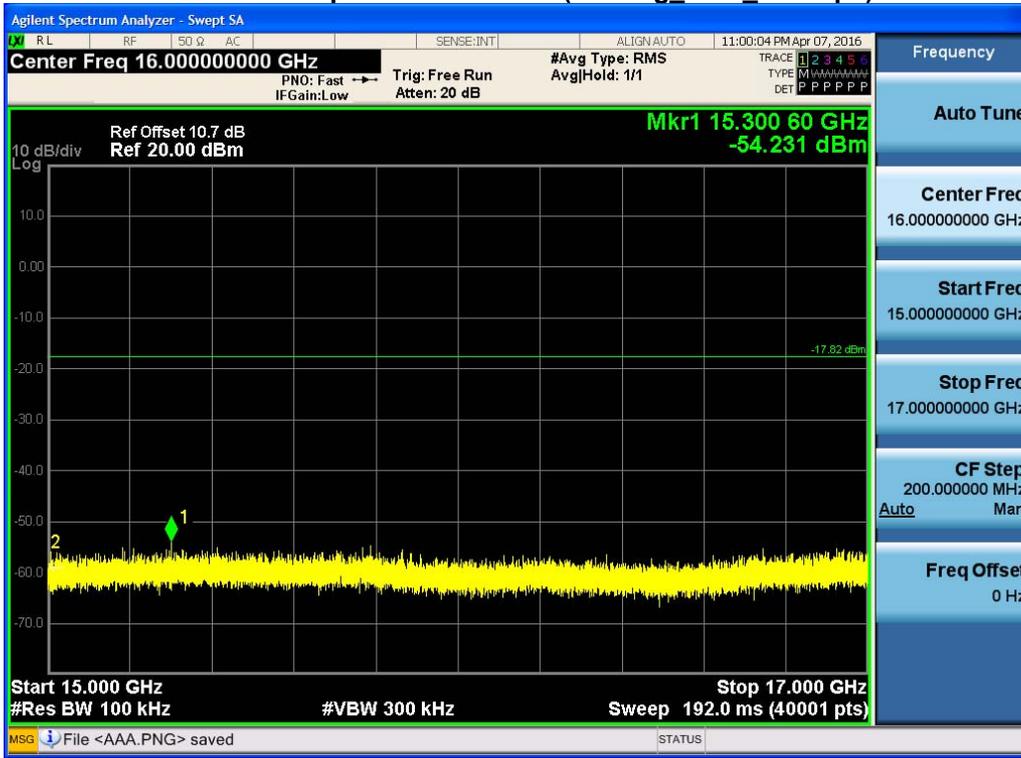


17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11g_Ch.6_24 Mbps)

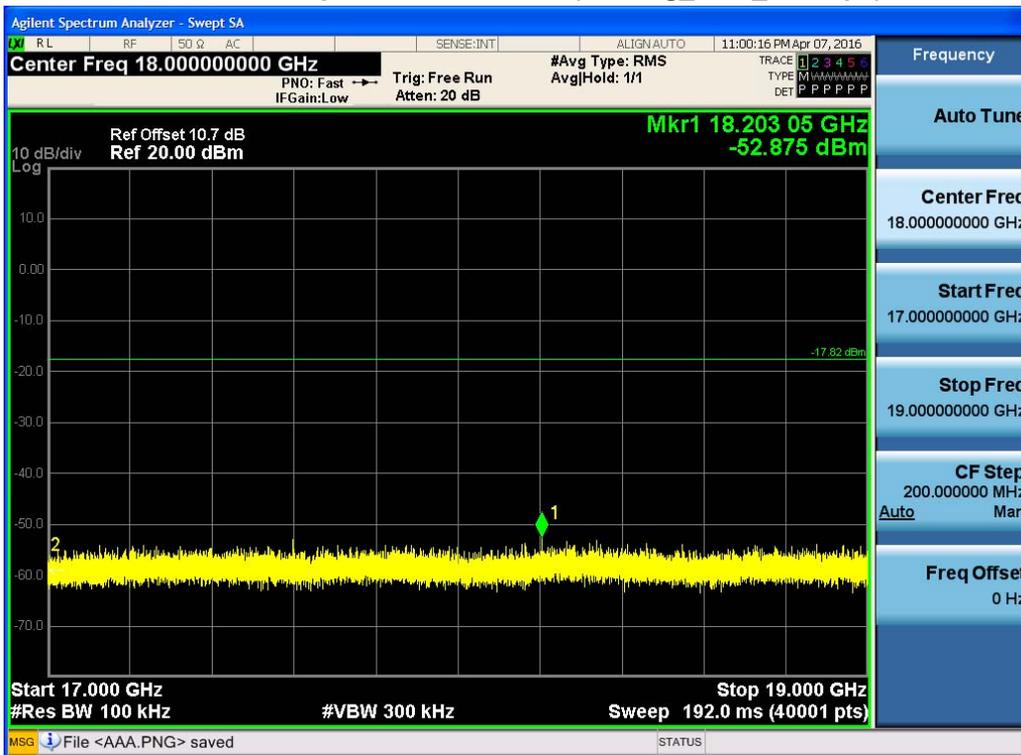


19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11g_Ch.6_24 Mbps)

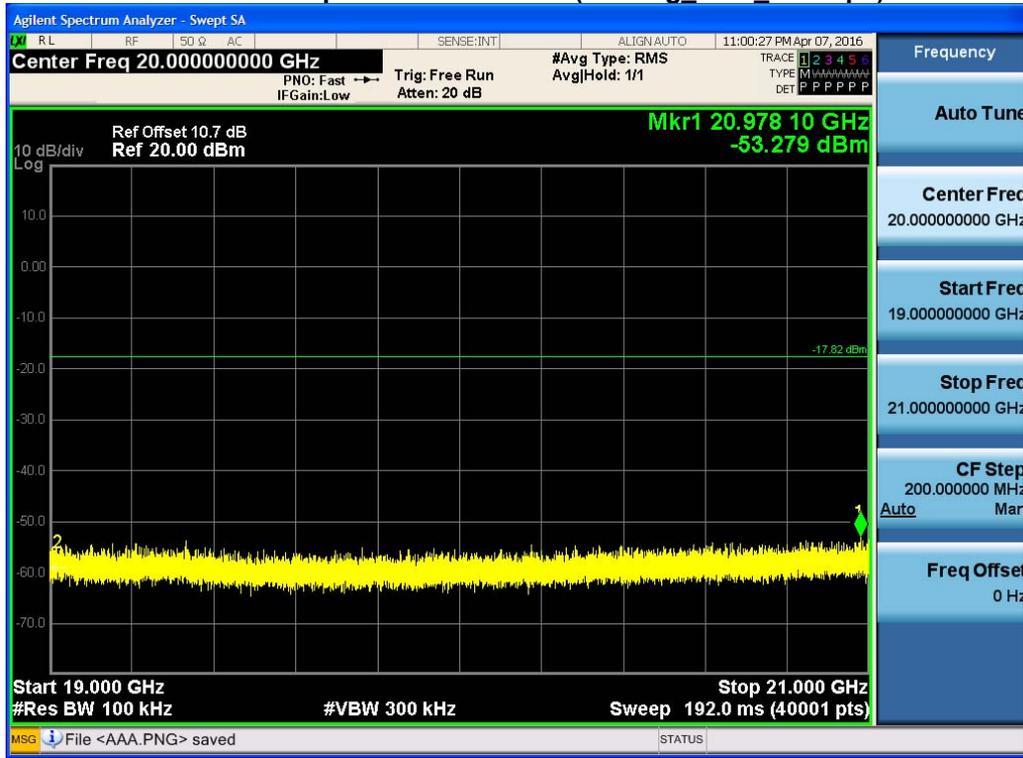


21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11g_Ch.6_24 Mbps)

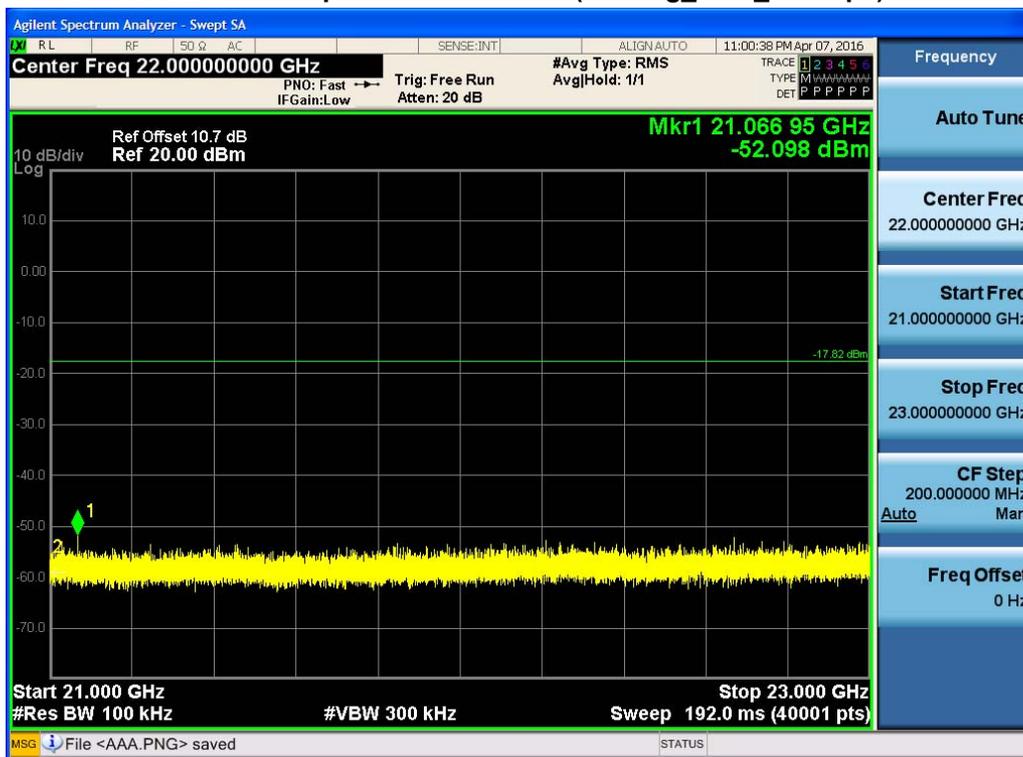

23 GHz ~ 25 GHz

Conducted Spurious Emission (802.11g_Ch.6_24 Mbps)

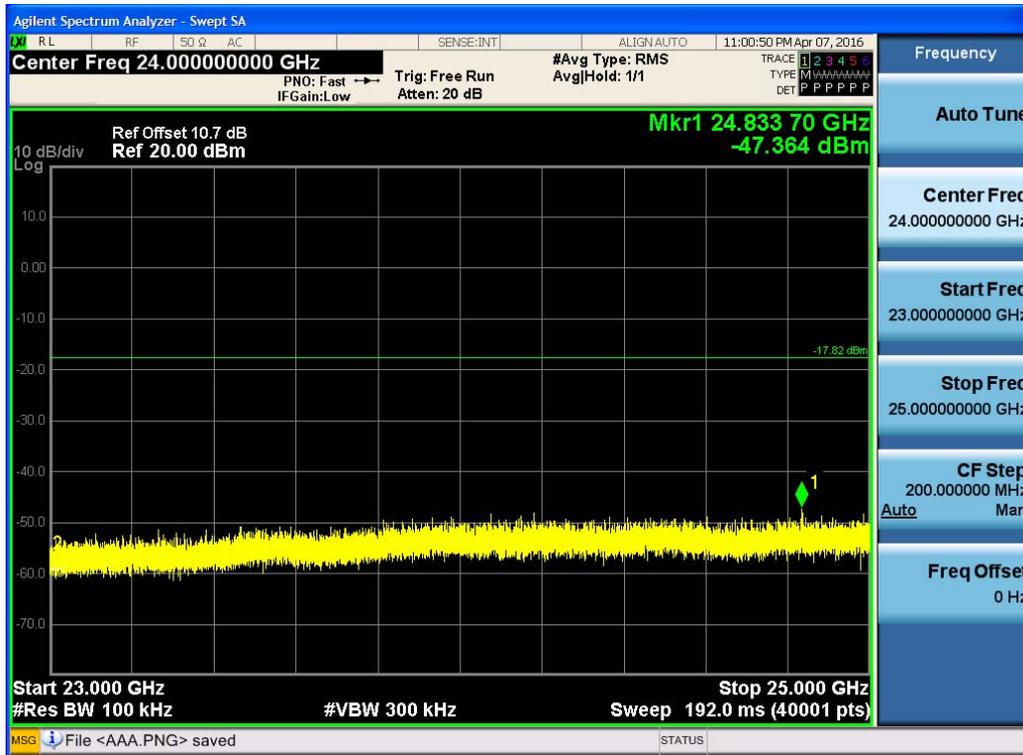

9.6 RADIATED MEASUREMENT.**9.6.1 RADIATED SPURIOUS EMISSIONS.**

Test Requirements and limit, §15.205, §15.209


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Mode


- Stand alone with normal cover
- Stand alone with quick cover (open)
- Stand alone with quick cover (close)

Test Configuration


Below 30 MHz

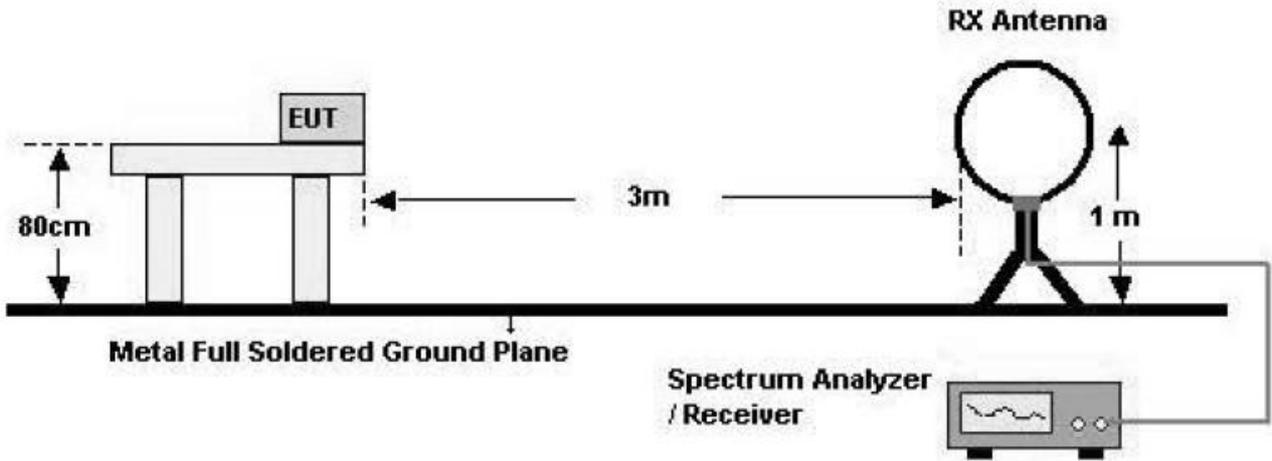

30 MHz - 1 GHz

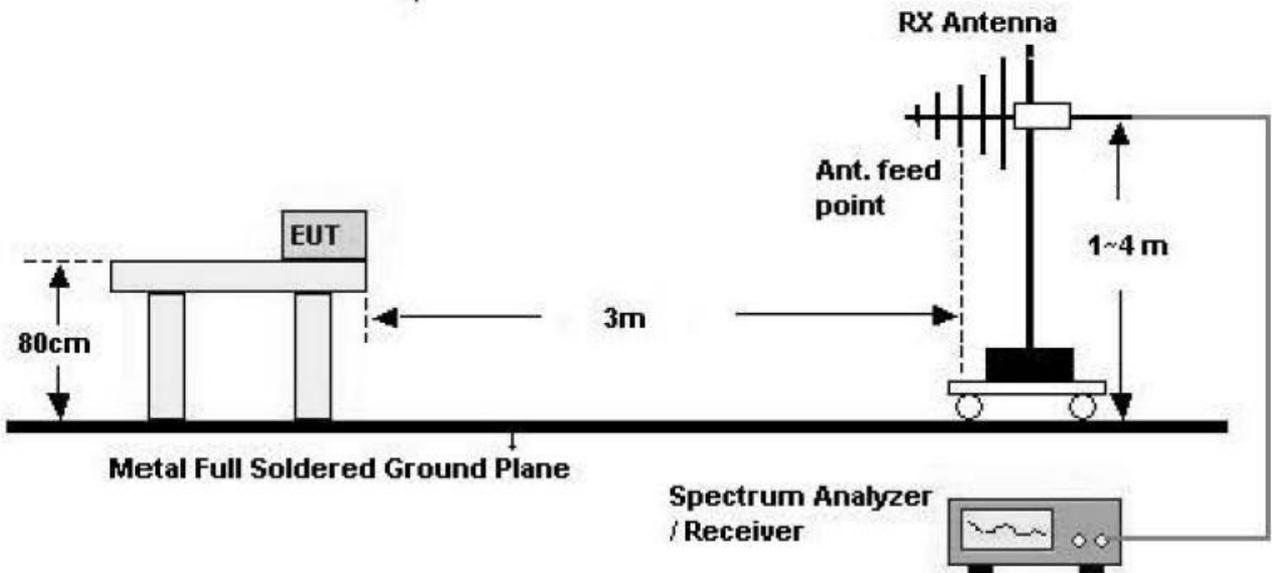

Above 1 GHz

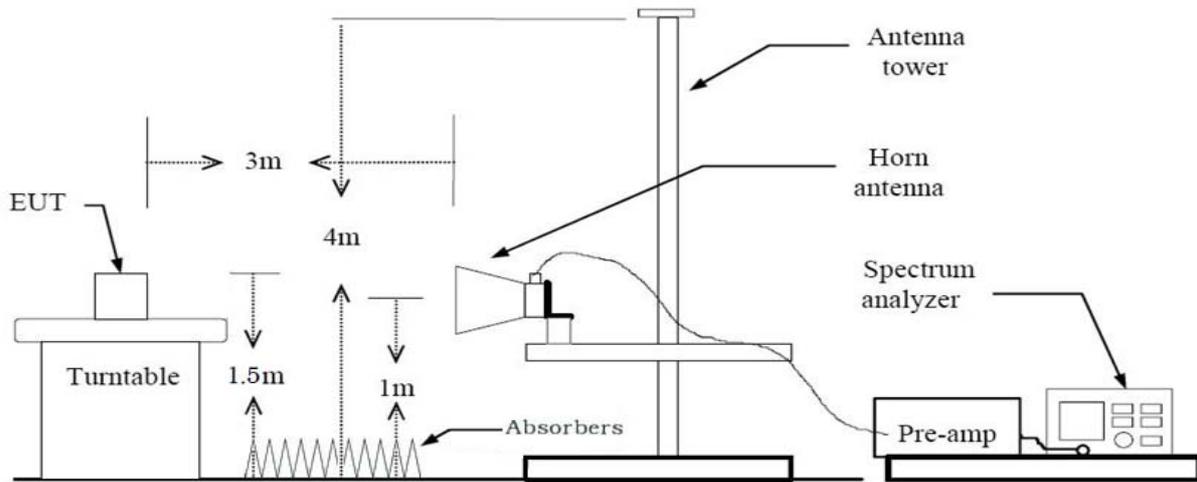

TEST PROCEDURE USED

Method 12.1 in KDB 558074 v03r05

Spectrum Setting

- Peak

Peak emission levels are measured by setting the instrument as follows:

RBW = cf. Table 1.

VBW $\geq 3 \times$ RBW.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweeps to continue until the trace stabilizes.

(Note that the required measurement time may be longer for low duty cycle applications).

Table 1 —RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

- Average (duty cycle \geq 98%)

Set RBW = 1 MHz

Set VBW \geq 3 x RBW

Detector = RMS

Averaging type = power (i.e., RMS).

Sweep time = auto.

Trace mode = average (at least 100 traces).

- Average (duty cycle < 98%, duty cycle variations are less than $\pm 2\%$)

Set RBW = 1 MHz

Set VBW \geq 3 x RBW

Detector = RMS.

Averaging type = power (i.e., RMS).

Sweep time = auto.

Trace mode = average (at least 100 traces).

A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.

Note :

1. We are performed the RSE and radiated band edge using standard radiated method(RMS).
2. The duty cycle factor for 802.11 b/g/n_20 MHz

Mode	Worst Data rate (Mbps)	T _{on} (ms)	T _{total} (ms)	Duty Cycle (%)	Duty Cycle Factor (dB)
b	1	1.000	1.000	100.00	0.000
g	6	2.034	2.049	99.27	0.032
n_20MHz	MCS Index 0	1.880	1.895	99.21	0.035

TEST RESULTS

9 kHz – 30MHz

Operation Mode: Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 9 kHz to the 30MHz.
2. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
3. Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB)
4. Limit line = specific Limits (dBuV) + Distance extrapolation factor
5. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

TEST RESULTS**Below 1 GHz****Operation Mode:** Normal Mode

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Notes:

1. Measuring frequencies from 30 MHz to the 1 GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Stand alone with normal cover

Above 1 GHz

Operation Mode: 802.11 b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2412
 Channel No.: 01 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	49.11	-2.83	V	46.28	73.98	27.70	PK
4824	42.45	-2.83	V	39.62	53.98	14.36	AV
7236	44.61	6.74	V	51.35	73.98	22.63	PK
7236	32.06	6.74	V	38.80	53.98	15.18	AV
4824	49.84	-2.83	H	47.01	73.98	26.97	PK
4824	42.96	-2.83	H	40.13	53.98	13.85	AV
7236	44.52	6.74	H	51.26	73.98	22.72	PK
7236	32.14	6.74	H	38.88	53.98	15.10	AV

Operation Mode: 802.11 g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2412
 Channel No.: 01 Ch

Frequency [MHz]	Reading [dBuV]	D.C.C.F [dB]	A.F.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	47.69	0.00	-2.83	V	44.86	73.98	29.12	PK
4824	35.36	0.03	-2.83	V	32.56	53.98	21.42	AV
7236	44.01	0.00	6.74	V	50.75	73.98	23.23	PK
7236	32.00	0.03	6.74	V	38.77	53.98	15.21	AV
4824	47.84	0.00	-2.83	H	45.01	73.98	28.97	PK
4824	35.48	0.03	-2.83	H	32.68	53.98	21.30	AV
7236	44.15	0.00	6.74	H	50.89	73.98	23.09	PK
7236	32.06	0.03	6.74	H	38.83	53.98	15.15	AV

Operation Mode: 802.11 n_20MHz
 Transfer MCS Index: 0
 Operating Frequency 2412
 Channel No. 01 Ch

Frequency [MHz]	Reading [dBuV]	D.C.C.F [dB]	A.F.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	46.53	0.00	-2.83	V	43.70	73.98	30.28	PK
4824	34.75	0.04	-2.83	V	31.96	53.98	22.03	AV
7236	44.35	0.00	6.74	V	51.09	73.98	22.89	PK
7236	32.06	0.04	6.74	V	38.84	53.98	15.15	AV
4824	46.56	0.00	-2.83	H	43.73	73.98	30.25	PK
4824	34.78	0.04	-2.83	H	31.99	53.98	22.00	AV
7236	44.45	0.00	6.74	H	51.19	73.98	22.79	PK
7236	32.10	0.04	6.74	H	38.88	53.98	15.11	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain (802.11b)
5. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Duty Cycle Factor (802.11g/n)
6. We have done 802.11b/g/n mode and all data rate. Worst data rate is the lowest data of each mode.
7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Operation Mode: 802.11 b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2437
 Channel No.: 06 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	48.49	-2.61	V	45.88	73.98	28.10	PK
4874	40.56	-2.61	V	37.95	53.98	16.03	AV
7311	44.30	6.17	V	50.47	73.98	23.51	PK
7311	32.58	6.17	V	38.75	53.98	15.23	AV
4874	49.38	-2.61	H	46.77	73.98	27.21	PK
4874	41.01	-2.61	H	38.40	53.98	15.58	AV
7311	44.59	6.17	H	50.76	73.98	23.22	PK
7311	32.61	6.17	H	38.78	53.98	15.20	AV

Operation Mode: 802.11 g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2437
 Channel No.: 06 Ch

Frequency [MHz]	Reading [dBuV]	D.C.C.F [dB]	A.F.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	47.90	0.00	-2.61	V	45.29	73.98	28.69	PK
4874	35.28	0.03	-2.61	V	32.70	53.98	21.28	AV
7311	44.62	0.00	6.17	V	50.79	73.98	23.19	PK
7311	32.63	0.03	6.17	V	38.83	53.98	15.15	AV
4874	47.98	0.00	-2.61	H	45.37	73.98	28.61	PK
4874	35.34	0.03	-2.61	H	32.76	53.98	21.22	AV
7311	44.73	0.00	6.17	H	50.90	73.98	23.08	PK
7311	32.68	0.03	6.17	H	38.88	53.98	15.10	AV

Operation Mode: 802.11 n_20MHz
 Transfer MCS Index: 0
 Operating Frequency 2437
 Channel No. 06 Ch

Frequency [MHz]	Reading [dBuV]	D.C.C.F [dB]	A.F.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	48.39	0.00	-2.61	V	45.78	73.98	28.20	PK
4874	35.55	0.04	-2.61	V	32.98	53.98	21.01	AV
7311	44.51	0.00	6.17	V	50.68	73.98	23.30	PK
7311	32.63	0.04	6.17	V	38.84	53.98	15.15	AV
4874	48.62	0.00	-2.61	H	46.01	73.98	27.97	PK
4874	35.51	0.04	-2.61	H	32.94	53.98	21.05	AV
7311	44.60	0.00	6.17	H	50.77	73.98	23.21	PK
7311	32.67	0.04	6.17	H	38.88	53.98	15.11	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain (802.11b)
5. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Duty Cycle Factor (802.11g/n)
6. We have done 802.11b/g/n mode and all data rate. Worst data rate is the lowest data of each mode.
7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Operation Mode: 802.11 b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2462
 Channel No.: 11 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	49.71	-2.42	V	47.29	73.98	26.69	PK
4924	42.87	-2.42	V	40.45	53.98	13.53	AV
7386	43.40	6.33	V	49.73	73.98	24.25	PK
7386	31.31	6.33	V	37.64	53.98	16.34	AV
4924	50.13	-2.42	H	47.71	73.98	26.27	PK
4924	43.43	-2.42	H	41.01	53.98	12.97	AV
7386	43.21	6.33	H	49.54	73.98	24.44	PK
7386	31.28	6.33	H	37.61	53.98	16.37	AV

Operation Mode: 802.11 g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2462
 Channel No.: 11 Ch

Frequency [MHz]	Reading [dBuV]	D.C.C.F [dB]	A.F.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	46.78	0.00	-2.42	V	44.36	73.98	29.62	PK
4924	34.77	0.03	-2.42	V	32.38	53.98	21.60	AV
7386	43.25	0.00	6.33	V	49.58	73.98	24.40	PK
7386	31.20	0.03	6.33	V	37.56	53.98	16.42	AV
4924	46.92	0.00	-2.42	H	44.50	73.98	29.48	PK
4924	34.73	0.03	-2.42	H	32.34	53.98	21.64	AV
7386	43.34	0.00	6.33	H	49.67	73.98	24.31	PK
7386	31.18	0.03	6.33	H	37.54	53.98	16.44	AV

Operation Mode: 802.11 n_20MHz
 Transfer MCS Index: 0
 Operating Frequency 2462
 Channel No. 11 Ch


Frequency [MHz]	Reading [dBuV]	D.C.C.F [dB]	A.F.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	46.93	0.00	-2.42	V	44.51	73.98	29.47	PK
4924	34.76	0.04	-2.42	V	32.38	53.98	21.61	AV
7386	49.24	0.00	6.33	V	55.57	73.98	18.41	PK
7386	31.15	0.04	6.33	V	37.52	53.98	16.47	AV
4924	47.02	0.00	-2.42	H	44.60	73.98	29.38	PK
4924	34.81	0.04	-2.42	H	32.43	53.98	21.56	AV
7386	49.18	0.00	6.33	H	55.51	73.98	18.47	PK
7386	31.28	0.04	6.33	H	37.65	53.98	16.34	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain (802.11b)
5. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Duty Cycle Factor (802.11g/n)
6. We have done 802.11b/g/n mode and all data rate. Worst data rate is the lowest data of each mode.
7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.


■ **RESULT PLOTS (Worst case : z-H)**

Radiated Spurious Emissions plot – Average Reading (802.11b, Ch.11 2rd Harmonic)

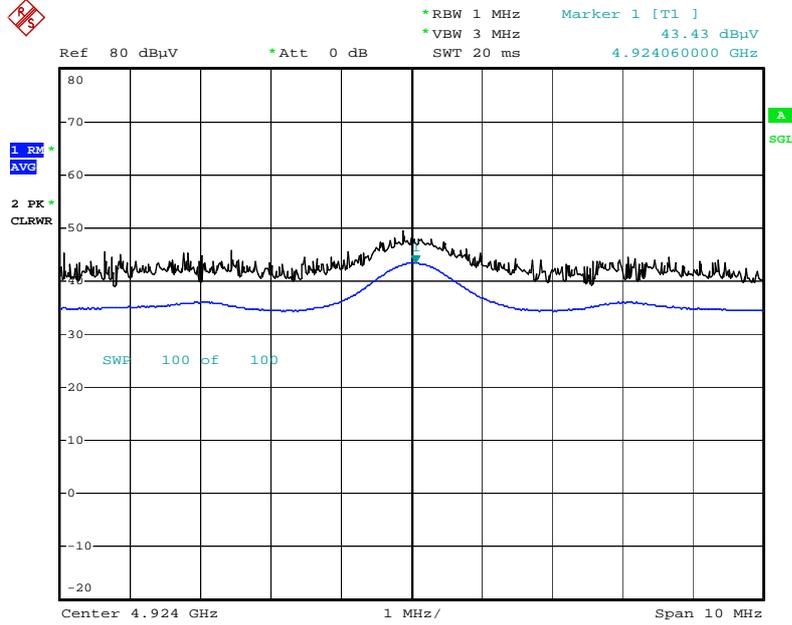


Date: 11.APR.2016 17:56:55

Radiated Spurious Emissions plot – Peak Reading (802.11b, Ch.11 2rd Harmonic)

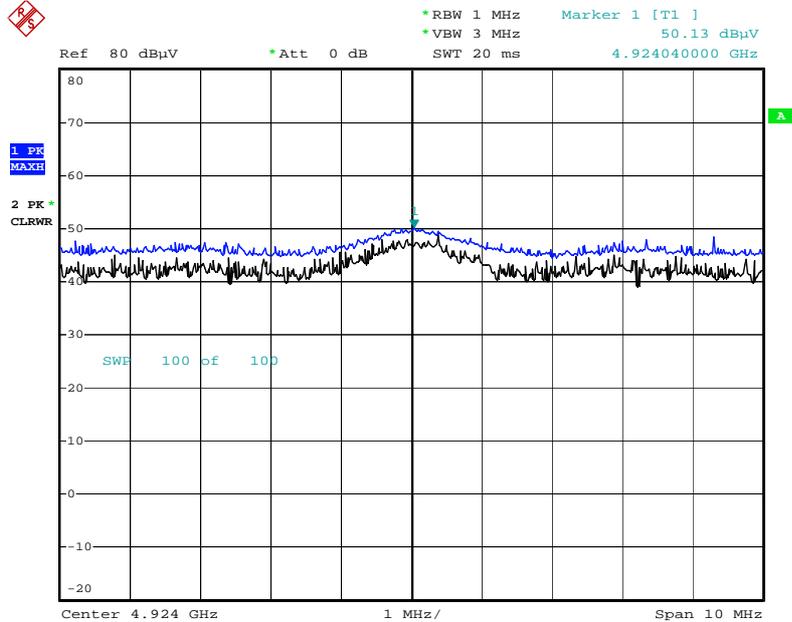


Date: 11.APR.2016 17:57:34

Radiated Spurious Emissions plot – Average Reading (802.11g, Ch.1 3rd Harmonic)

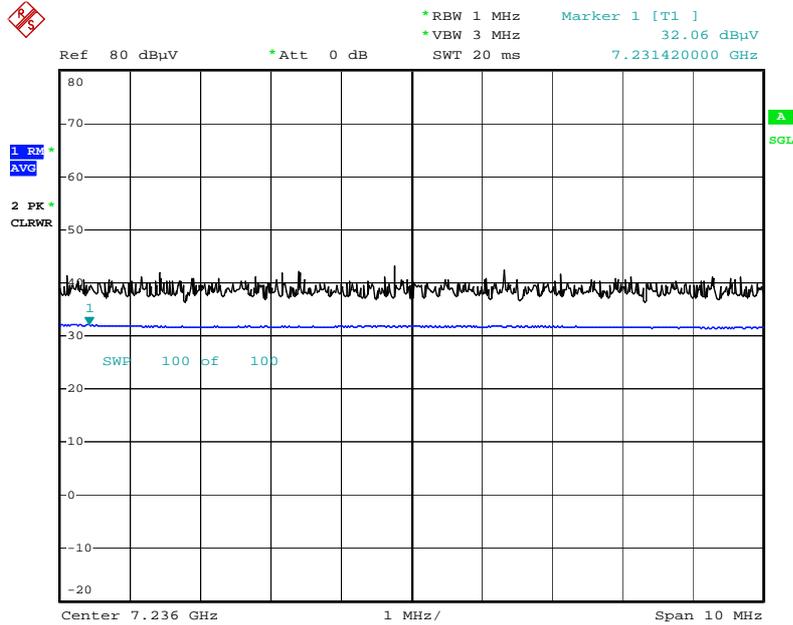


Date: 11.APR.2016 18:08:37

Radiated Spurious Emissions plot – Peak Reading (802.11g, Ch.1 3rd Harmonic)

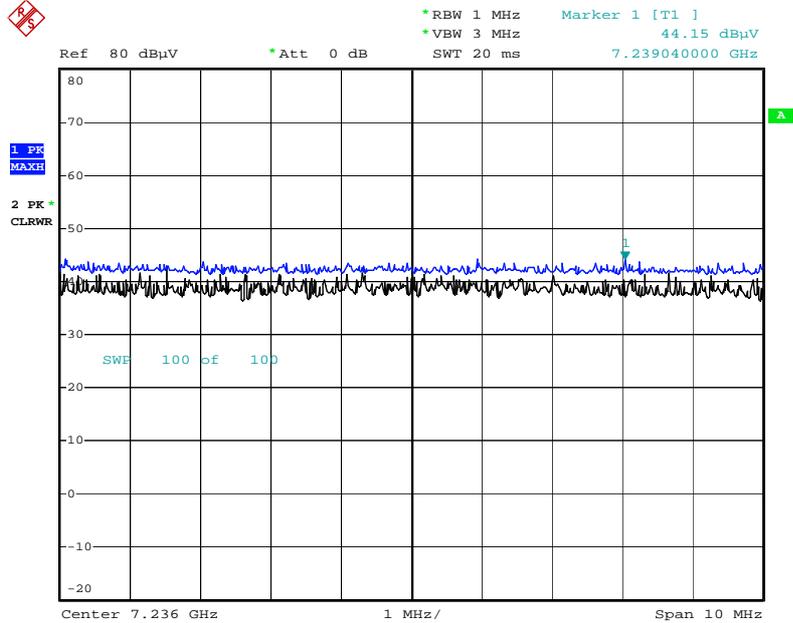


Date: 11.APR.2016 18:09:00

Radiated Spurious Emissions plot – Average Reading (802.11n_20MHz, Ch.1 3rd Harmonic)

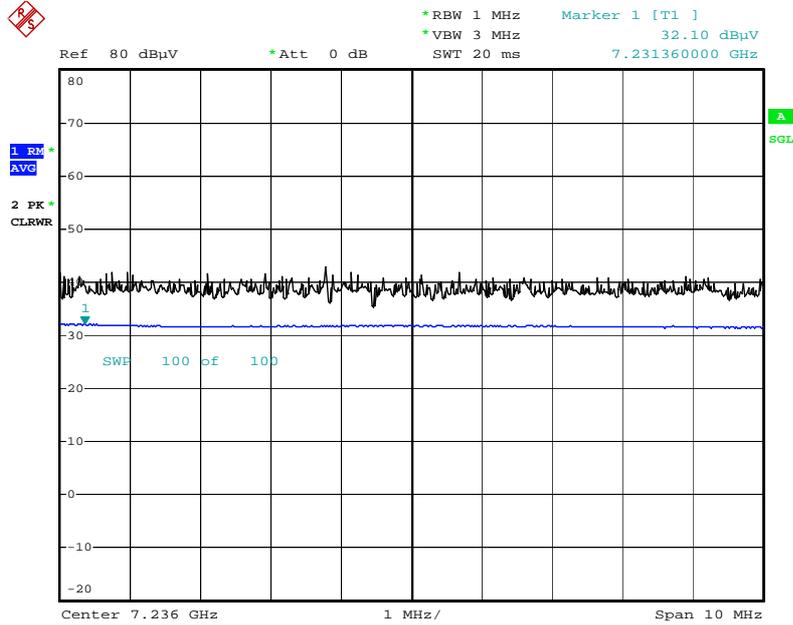

Date: 11.APR.2016 18:09:44

Radiated Spurious Emissions plot – Peak Reading (802.11n_20MHz, Ch.1 3rd Harmonic)

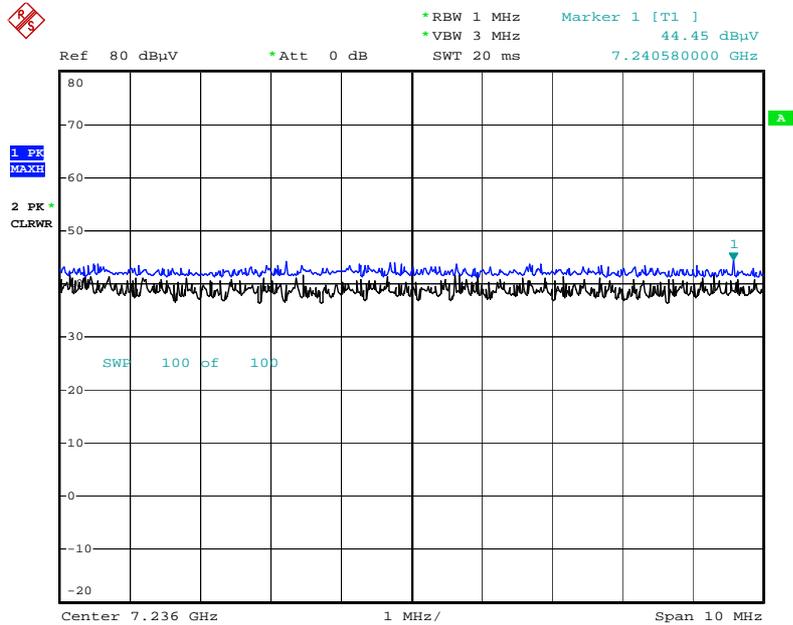

Date: 11.APR.2016 18:09:28

Note : Only the worst case plots for Radiated Spurious Emissions.

Stand alone with quick cover (open)

Above 1 GHz

Operation Mode: 802.11 b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2412
 Channel No.: 01 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	49.86	-2.83	V	47.03	73.98	26.95	PK
4824	43.67	-2.83	V	40.84	53.98	13.14	AV
7236	43.53	6.74	V	50.27	73.98	23.71	PK
7236	32.18	6.74	V	38.92	53.98	15.06	AV
4824	50.39	-2.83	H	47.56	73.98	26.42	PK
4824	44.20	-2.83	H	41.37	53.98	12.61	AV
7236	43.72	6.74	H	50.46	73.98	23.52	PK
7236	32.21	6.74	H	38.95	53.98	15.03	AV

Operation Mode: 802.11 g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2412
 Channel No.: 01 Ch

Frequency [MHz]	Reading [dBuV]	D.C.C.F [dB]	A.F.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	46.60	0.00	-2.83	V	43.77	73.98	30.21	PK
4824	34.70	0.03	-2.83	V	31.90	53.98	22.08	AV
7236	44.58	0.00	6.74	V	51.32	73.98	22.66	PK
7236	32.11	0.03	6.74	V	38.88	53.98	15.10	AV
4824	46.57	0.00	-2.83	H	43.74	73.98	30.24	PK
4824	34.63	0.03	-2.83	H	31.83	53.98	22.15	AV
7236	44.66	0.00	6.74	H	51.40	73.98	22.58	PK
7236	32.15	0.03	6.74	H	38.92	53.98	15.06	AV

Operation Mode: 802.11 n_20MHz
 Transfer MCS Index: 0
 Operating Frequency 2412
 Channel No. 01 Ch

Frequency [MHz]	Reading [dBuV]	D.C.C.F [dB]	A.F.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	46.38	0.00	-2.83	V	43.55	73.98	30.43	PK
4824	34.62	0.04	-2.83	V	31.83	53.98	22.16	AV
7236	44.34	0.00	6.74	V	51.08	73.98	22.90	PK
7236	32.02	0.04	6.74	V	38.80	53.98	15.19	AV
4824	46.49	0.00	-2.83	H	43.66	73.98	30.32	PK
4824	34.71	0.04	-2.83	H	31.92	53.98	22.07	AV
7236	44.50	0.00	6.74	H	51.24	73.98	22.74	PK
7236	32.09	0.04	6.74	H	38.87	53.98	15.12	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain (802.11b)
5. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Duty Cycle Factor (802.11g/n)
6. We have done 802.11b/g/n mode and all data rate. Worst data rate is the lowest data of each mode.
7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Operation Mode: 802.11 b
 Transfer Rate: 1 Mbps
 Operating Frequency 2437
 Channel No. 06 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	49.25	-2.61	V	46.64	73.98	27.34	PK
4874	41.73	-2.61	V	39.12	53.98	14.86	AV
7311	44.05	6.17	V	50.22	73.98	23.76	PK
7311	32.65	6.17	V	38.82	53.98	15.16	AV
4874	49.78	-2.61	H	47.17	73.98	26.81	PK
4874	42.19	-2.61	H	39.58	53.98	14.40	AV
7311	44.44	6.17	H	50.61	73.98	23.37	PK
7311	32.68	6.17	H	38.85	53.98	15.13	AV

Operation Mode: 802.11 g
 Transfer Rate: 6 Mbps
 Operating Frequency 2437
 Channel No. 06 Ch

Frequency [MHz]	Reading [dBuV]	D.C.C.F [dB]	A.F.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	47.70	0.00	-2.61	V	45.09	73.98	28.89	PK
4874	35.41	0.03	-2.61	V	32.83	53.98	21.15	AV
7311	44.59	0.00	6.17	V	50.76	73.98	23.22	PK
7311	32.60	0.03	6.17	V	38.80	53.98	15.18	AV
4874	47.62	0.00	-2.61	H	45.01	73.98	28.97	PK
4874	35.50	0.03	-2.61	H	32.92	53.98	21.06	AV
7311	44.53	0.00	6.17	H	50.70	73.98	23.28	PK
7311	32.59	0.03	6.17	H	38.79	53.98	15.19	AV

Operation Mode: 802.11 n_20MHz
 Transfer MCS Index: 0
 Operating Frequency 2437
 Channel No. 06 Ch

Frequency [MHz]	Reading [dBuV]	D.C.C.F [dB]	A.F.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	48.33	0.00	-2.61	V	45.72	73.98	28.26	PK
4874	35.43	0.04	-2.61	V	32.86	53.98	21.13	AV
7311	44.38	0.00	6.17	V	50.55	73.98	23.43	PK
7311	32.54	0.04	6.17	V	38.75	53.98	15.24	AV
4874	48.49	0.00	-2.61	H	45.88	73.98	28.10	PK
4874	35.46	0.04	-2.61	H	32.89	53.98	21.10	AV
7311	44.34	0.00	6.17	H	50.51	73.98	23.47	PK
7311	32.56	0.04	6.17	H	38.77	53.98	15.22	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain (802.11b)
5. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Duty Cycle Factor (802.11g/n)
6. We have done 802.11b/g/n mode and all data rate. Worst data rate is the lowest data of each mode.
7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Operation Mode: 802.11 b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2462
 Channel No.: 11 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	49.75	-2.42	V	47.33	73.98	26.65	PK
4924	43.58	-2.42	V	41.16	53.98	12.82	AV
7386	42.89	6.33	V	49.22	73.98	24.76	PK
7386	31.25	6.33	V	37.58	53.98	16.40	AV
4924	50.49	-2.42	H	48.07	73.98	25.91	PK
4924	44.30	-2.42	H	41.88	53.98	12.10	AV
7386	43.24	6.33	H	49.57	73.98	24.41	PK
7386	31.31	6.33	H	37.64	53.98	16.34	AV

Operation Mode: 802.11 g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2462
 Channel No.: 11 Ch

Frequency [MHz]	Reading [dBuV]	D.C.C.F [dB]	A.F.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	46.79	0.00	-2.42	V	44.37	73.98	29.61	PK
4924	34.67	0.03	-2.42	V	32.28	53.98	21.70	AV
7386	43.11	0.00	6.33	V	49.44	73.98	24.54	PK
7386	31.08	0.03	6.33	V	37.44	53.98	16.54	AV
4924	46.89	0.00	-2.42	H	44.47	73.98	29.51	PK
4924	34.71	0.03	-2.42	H	32.32	53.98	21.66	AV
7386	43.13	0.00	6.33	H	49.46	73.98	24.52	PK
7386	31.17	0.03	6.33	H	37.53	53.98	16.45	AV

Operation Mode: 802.11 n_20MHz
 Transfer MCS Index: 0
 Operating Frequency 2462
 Channel No. 11 Ch


Frequency [MHz]	Reading [dBuV]	D.C.C.F [dB]	A.F.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	46.88	0.00	-2.42	V	44.46	73.98	29.52	PK
4924	34.73	0.04	-2.42	V	32.35	53.98	21.64	AV
7386	43.09	0.00	6.33	V	49.42	73.98	24.56	PK
7386	31.06	0.04	6.33	V	37.43	53.98	16.56	AV
4924	46.93	0.00	-2.42	H	44.51	73.98	29.47	PK
4924	34.78	0.04	-2.42	H	32.40	53.98	21.59	AV
7386	43.16	0.00	6.33	H	49.49	73.98	24.49	PK
7386	31.23	0.04	6.33	H	37.60	53.98	16.39	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain (802.11b)
5. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Duty Cycle Factor (802.11g/n)
6. We have done 802.11b/g/n mode and all data rate. Worst data rate is the lowest data of each mode.
7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.


■ **RESULT PLOTS (Worst case : z-H)**

Radiated Spurious Emissions plot – Average Reading (802.11b, Ch.11 2rd Harmonic)

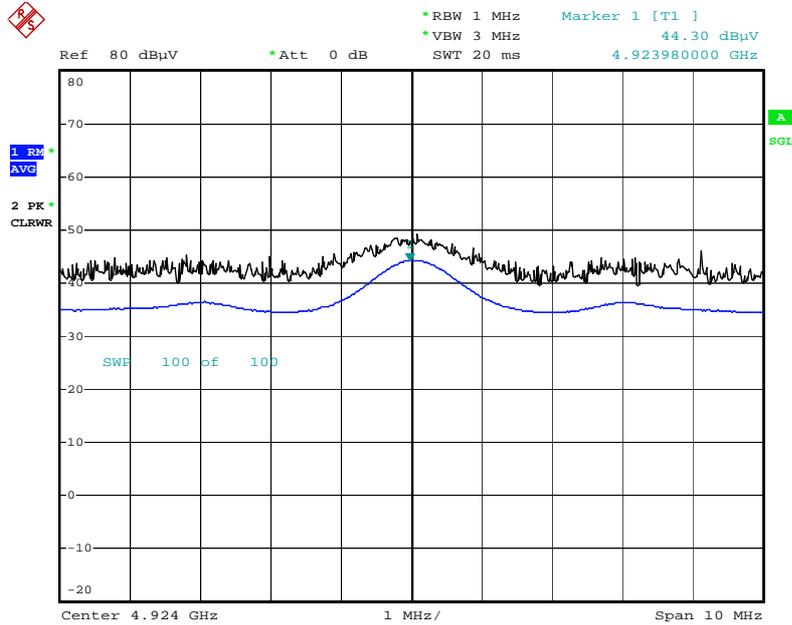


Date: 11.APR.2016 18:02:10

Radiated Spurious Emissions plot – Peak Reading (802.11b, Ch.11 2rd Harmonic)

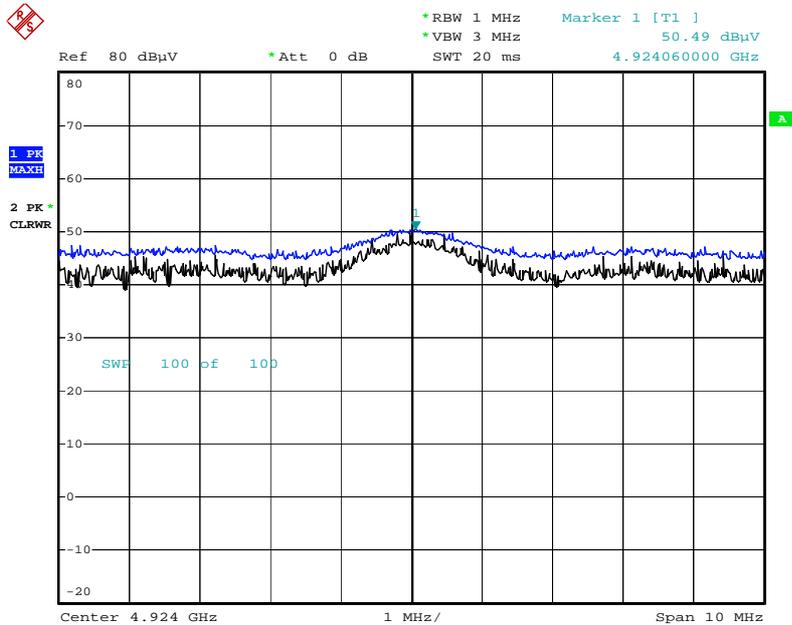


Date: 11.APR.2016 18:02:51

Radiated Spurious Emissions plot – Average Reading (802.11g, Ch.1 3rd Harmonic)

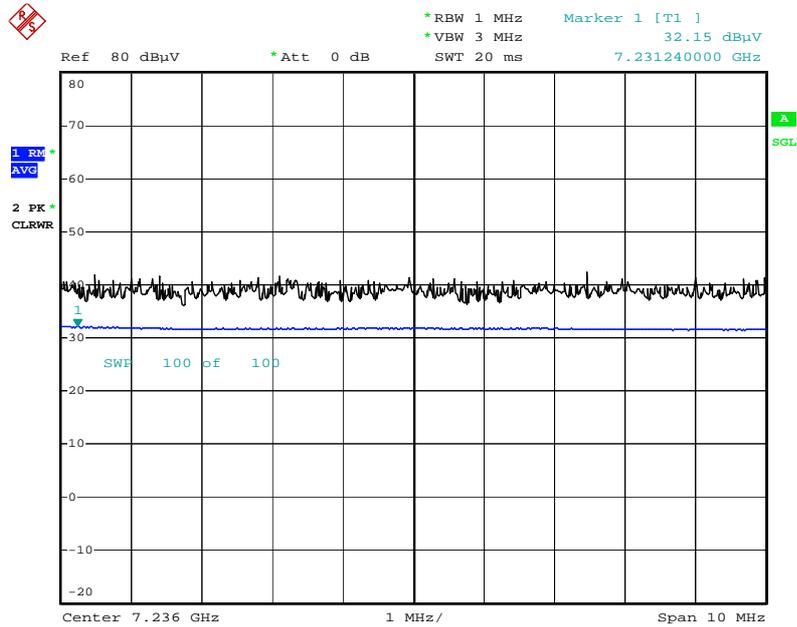


Date: 11.APR.2016 18:12:58

Radiated Spurious Emissions plot – Peak Reading (802.11g, Ch.1 3rd Harmonic)

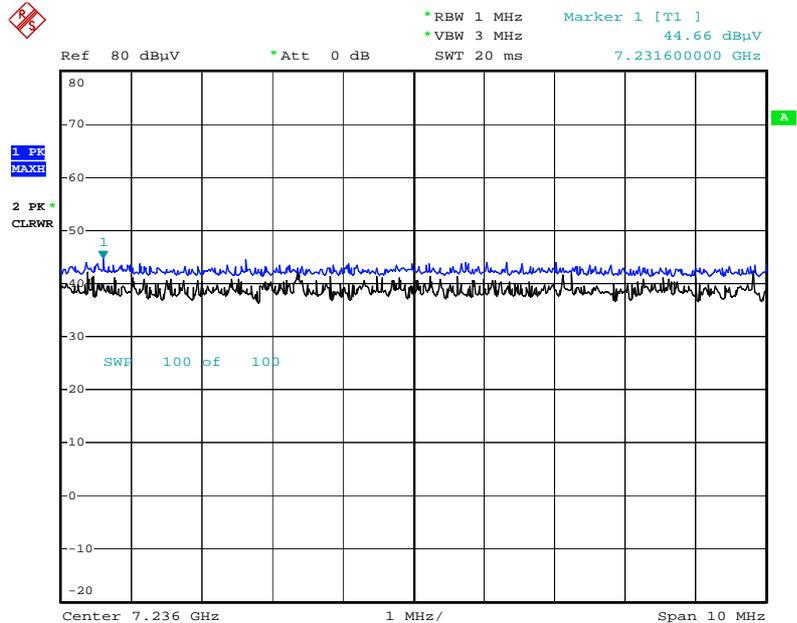


Date: 11.APR.2016 18:11:47

Radiated Spurious Emissions plot – Average Reading (802.11n_20MHz, Ch.1 3rd Harmonic)

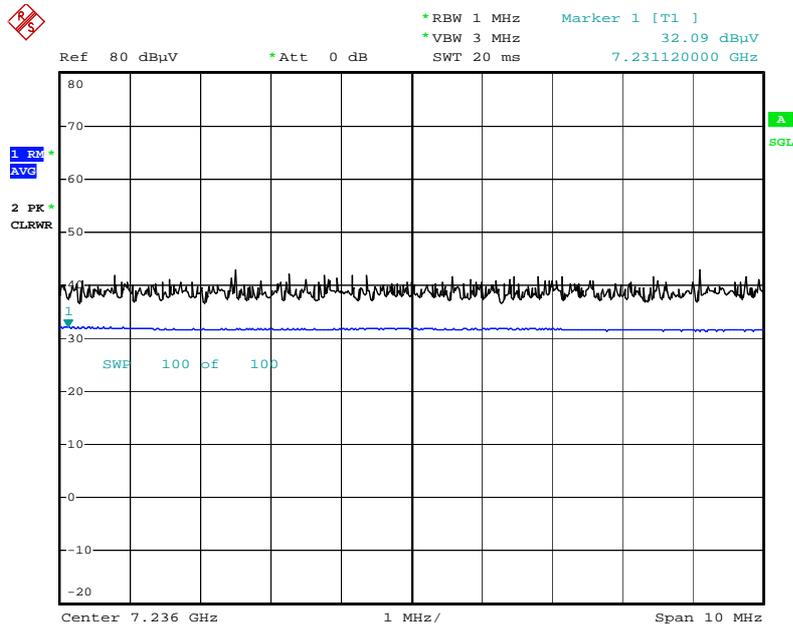

Date: 11.APR.2016 18:12:41

Radiated Spurious Emissions plot – Peak Reading (802.11n_20MHz, Ch.1 3rd Harmonic)

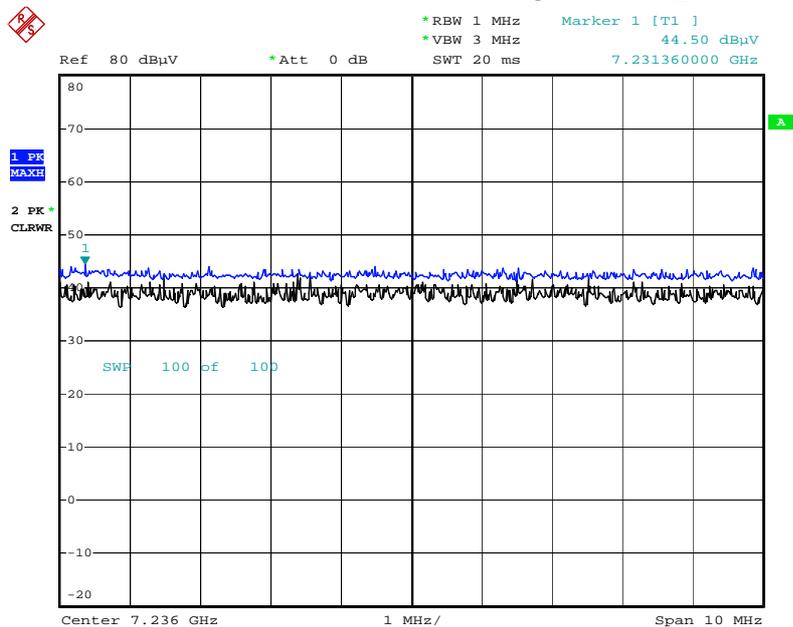

Date: 11.APR.2016 18:12:24

Note : Only the worst case plots for Radiated Spurious Emissions.

Stand alone with quick cover (close)

Above 1 GHz

Operation Mode: 802.11 b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2412
 Channel No.: 01 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	49.65	-2.83	V	46.82	73.98	27.16	PK
4824	43.03	-2.83	V	40.20	53.98	13.78	AV
7236	43.66	6.74	V	50.40	73.98	23.58	PK
7236	32.23	6.74	V	38.97	53.98	15.01	AV
4824	50.19	-2.83	H	47.36	73.98	26.62	PK
4824	43.46	-2.83	H	40.63	53.98	13.35	AV
7236	43.56	6.74	H	50.30	73.98	23.68	PK
7236	32.11	6.74	H	38.85	53.98	15.13	AV

Operation Mode: 802.11 g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2412
 Channel No.: 01 Ch

Frequency [MHz]	Reading [dBuV]	D.C.C.F [dB]	A.F.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	46.58	0.00	-2.83	V	43.75	73.98	30.23	PK
4824	34.63	0.03	-2.83	V	31.83	53.98	22.15	AV
7236	44.26	0.00	6.74	V	51.00	73.98	22.98	PK
7236	32.05	0.03	6.74	V	38.82	53.98	15.16	AV
4824	46.62	0.00	-2.83	H	43.79	73.98	30.19	PK
4824	34.71	0.03	-2.83	H	31.91	53.98	22.07	AV
7236	44.57	0.00	6.74	H	51.31	73.98	22.67	PK
7236	32.11	0.03	6.74	H	38.88	53.98	15.10	AV

Operation Mode: 802.11 n_20MHz
 Transfer MCS Index: 0
 Operating Frequency 2412
 Channel No. 01 Ch

Frequency [MHz]	Reading [dBuV]	D.C.C.F [dB]	A.F.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	46.64	0.00	-2.83	V	43.81	73.98	30.17	PK
4824	34.71	0.04	-2.83	V	31.92	53.98	22.07	AV
7236	44.37	0.00	6.74	V	51.11	73.98	22.87	PK
7236	32.08	0.04	6.74	V	38.86	53.98	15.13	AV
4824	46.53	0.00	-2.83	H	43.70	73.98	30.28	PK
4824	34.68	0.04	-2.83	H	31.89	53.98	22.10	AV
7236	44.66	0.00	6.74	H	51.40	73.98	22.58	PK
7236	32.13	0.04	6.74	H	38.91	53.98	15.08	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain (802.11b)
5. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Duty Cycle Factor (802.11g/n)
6. We have done 802.11b/g/n mode and all data rate. Worst data rate is the lowest data of each mode.
7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Operation Mode: 802.11 b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2437
 Channel No.: 06 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	49.14	-2.61	V	46.53	73.98	27.45	PK
4874	41.12	-2.61	V	38.51	53.98	15.47	AV
7311	44.28	6.17	V	50.45	73.98	23.53	PK
7311	32.63	6.17	V	38.80	53.98	15.18	AV
4874	49.62	-2.61	H	47.01	73.98	26.97	PK
4874	41.59	-2.61	H	38.98	53.98	15.00	AV
7311	44.50	6.17	H	50.67	73.98	23.31	PK
7311	32.71	6.17	H	38.88	53.98	15.10	AV

Operation Mode: 802.11 g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2437
 Channel No.: 06 Ch

Frequency [MHz]	Reading [dBuV]	D.C.C.F [dB]	A.F.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	47.49	0.00	-2.61	V	44.88	73.98	29.10	PK
4874	35.28	0.03	-2.61	V	32.70	53.98	21.28	AV
7311	47.68	0.00	6.17	V	53.85	73.98	20.13	PK
7311	35.36	0.03	6.17	V	41.56	53.98	12.42	AV
4874	47.73	0.00	-2.61	H	45.12	73.98	28.86	PK
4874	35.46	0.03	-2.61	H	32.88	53.98	21.10	AV
7311	48.00	0.00	6.17	H	54.17	73.98	19.81	PK
7311	35.42	0.03	6.17	H	41.62	53.98	12.36	AV

Operation Mode: 802.11 n_20MHz
 Transfer MCS Index: 0
 Operating Frequency 2437
 Channel No. 06 Ch

Frequency [MHz]	Reading [dBuV]	D.C.C.F [dB]	A.F.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	48.63	0.00	-2.61	V	46.02	73.98	27.96	PK
4874	35.42	0.04	-2.61	V	32.85	53.98	21.14	AV
7311	44.42	0.00	6.17	V	50.59	73.98	23.39	PK
7311	35.63	0.04	6.17	V	41.84	53.98	12.15	AV
4874	48.51	0.00	-2.61	H	45.90	73.98	28.08	PK
4874	35.33	0.04	-2.61	H	32.76	53.98	21.23	AV
7311	44.29	0.00	6.17	H	50.46	73.98	23.52	PK
7311	32.62	0.04	6.17	H	38.83	53.98	15.16	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain (802.11b)
5. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Duty Cycle Factor (802.11g/n)
6. We have done 802.11b/g/n mode and all data rate. Worst data rate is the lowest data of each mode.
7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

Operation Mode: 802.11 b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2462
 Channel No.: 11 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	49.66	-2.42	V	47.24	73.98	26.74	PK
4924	43.38	-2.42	V	40.96	53.98	13.02	AV
7386	42.91	6.33	V	49.24	73.98	24.74	PK
7386	31.30	6.33	V	37.63	53.98	16.35	AV
4924	50.23	-2.42	H	47.81	73.98	26.17	PK
4924	43.71	-2.42	H	41.29	53.98	12.69	AV
7386	43.18	6.33	H	49.51	73.98	24.47	PK
7386	31.29	6.33	H	37.62	53.98	16.36	AV

Operation Mode: 802.11 g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2462
 Channel No.: 11 Ch

Frequency [MHz]	Reading [dBuV]	D.C.C.F [dB]	A.F.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	46.83	0.00	-2.42	V	44.41	73.98	29.57	PK
4924	34.71	0.03	-2.42	V	32.32	53.98	21.66	AV
7386	43.14	0.00	6.33	V	49.47	73.98	24.51	PK
7386	31.21	0.03	6.33	V	37.57	53.98	16.41	AV
4924	46.94	0.00	-2.42	H	44.52	73.98	29.46	PK
4924	34.66	0.03	-2.42	H	32.27	53.98	21.71	AV
7386	43.28	0.00	6.33	H	49.61	73.98	24.37	PK
7386	31.16	0.03	6.33	H	37.52	53.98	16.46	AV

Operation Mode: 802.11 n_20MHz
 Transfer MCS Index: 0
 Operating Frequency 2462
 Channel No. 11 Ch


Frequency [MHz]	Reading [dBuV]	D.C.C.F [dB]	A.F.+CL-AMP G [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	46.92	0.00	-2.42	V	44.50	73.98	29.48	PK
4924	34.59	0.04	-2.42	V	32.21	53.98	21.78	AV
7386	43.16	0.00	6.33	V	49.49	73.98	24.49	PK
7386	31.21	0.04	6.33	V	37.58	53.98	16.41	AV
4924	46.81	0.00	-2.42	H	44.39	73.98	29.59	PK
4924	34.66	0.04	-2.42	H	32.28	53.98	21.71	AV
7386	43.18	0.00	6.33	H	49.51	73.98	24.47	PK
7386	31.25	0.04	6.33	H	37.62	53.98	16.37	AV

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain (802.11b)
5. Total = Reading Value + Antenna Factor + Cable Loss - Amp Gain + Duty Cycle Factor (802.11g/n)
6. We have done 802.11b/g/n mode and all data rate. Worst data rate is the lowest data of each mode.
7. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.


■ **RESULT PLOTS (Worst case : z-H)**

Radiated Spurious Emissions plot – Average Reading (802.11b, Ch.11 2rd Harmonic)

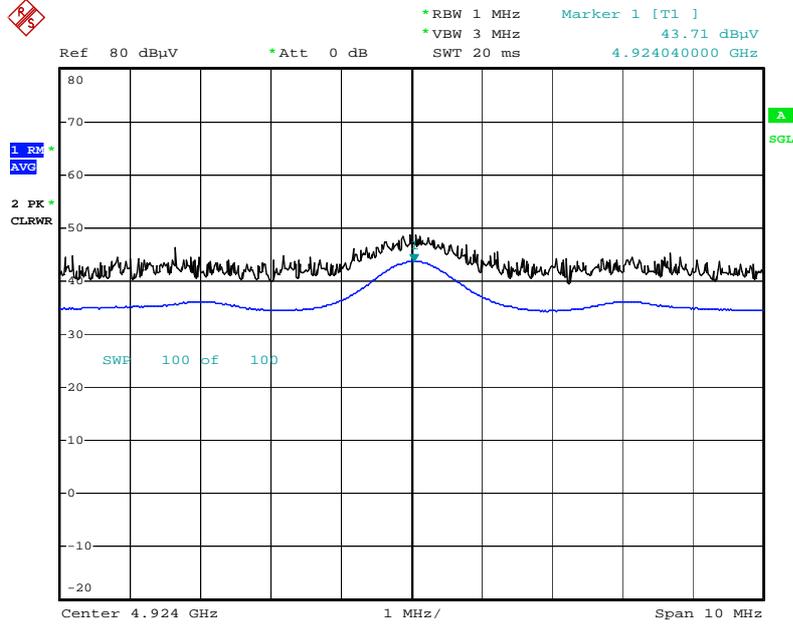


Date: 11.APR.2016 17:59:26

Radiated Spurious Emissions plot – Peak Reading (802.11b, Ch.11 2rd Harmonic)

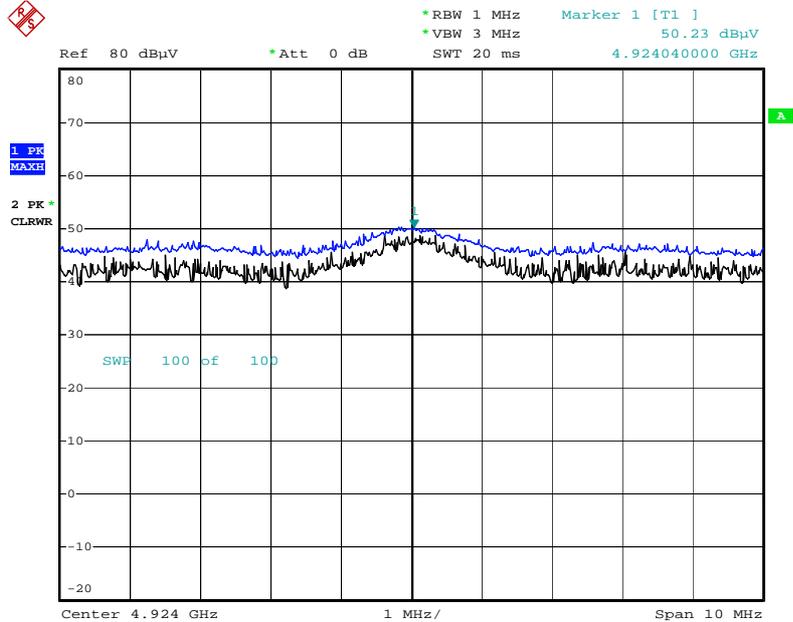


Date: 11.APR.2016 18:00:13

Radiated Spurious Emissions plot – Average Reading (802.11g, Ch.1 3rd Harmonic)

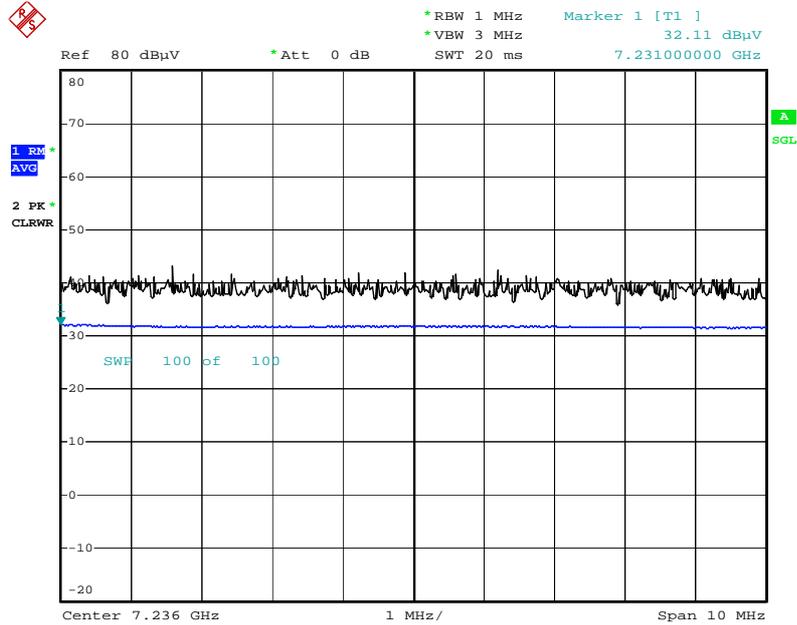


Date: 11.APR.2016 18:10:18

Radiated Spurious Emissions plot – Peak Reading (802.11g, Ch.1 3rd Harmonic)

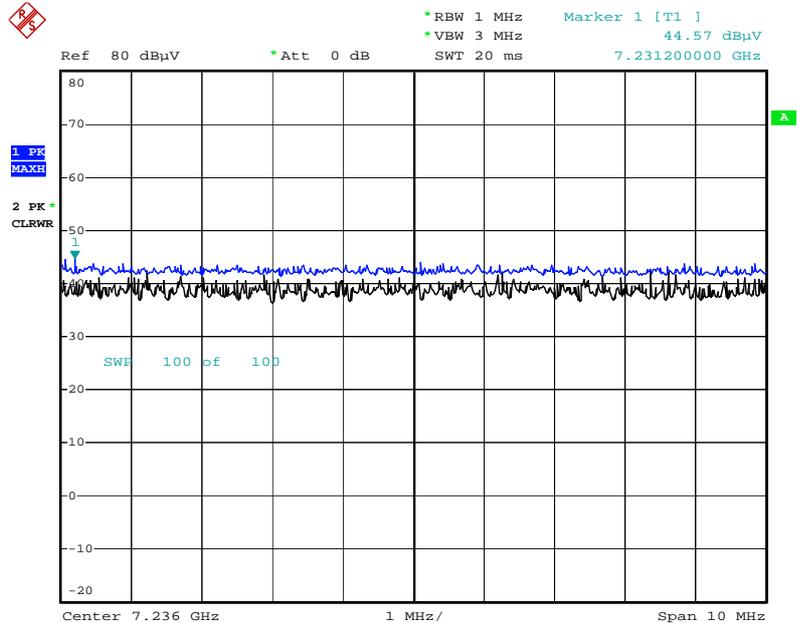


Date: 11.APR.2016 18:11:20

Radiated Spurious Emissions plot – Average Reading (802.11n_20MHz, Ch.1 3rd Harmonic)

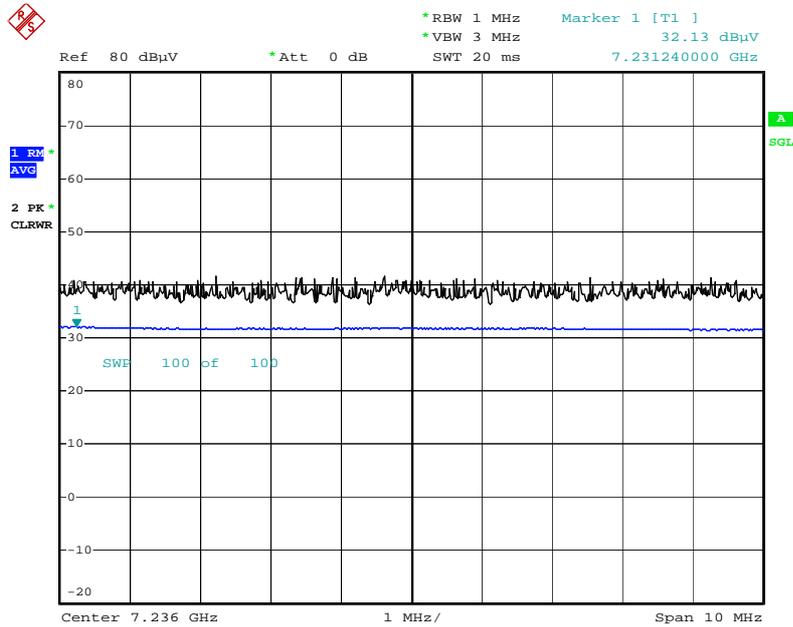

Date: 11.APR.2016 18:10:34

Radiated Spurious Emissions plot – Peak Reading (802.11n_20MHz, Ch.1 3rd Harmonic)

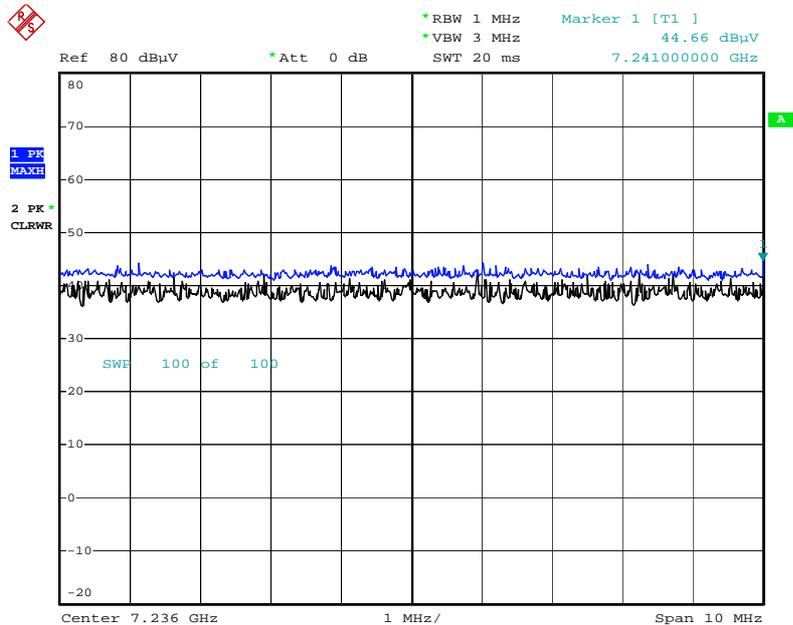

Date: 11.APR.2016 18:10:55

Note : Only the worst case plots for Radiated Spurious Emissions.

9.6.2 RADIATED RESTRICTED BAND EDGES

Test Requirements and limit, §15.247(d) §15.205, §15.209

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a) (See section 15.205(c)).

Stand alone with normal cover

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency 2412 MHz, 2462 MHz
 Channel No. 01 Ch, 11 Ch

Frequency [MHz]	Reading dBuV	Duty Cycle Factor	A.F.+CL [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	29.34	0.00	31.31	H	60.65	73.98	13.33	PK
2390.0	14.10	0.03	31.31	H	45.44	53.98	8.54	AV
2390.0	29.76	0.00	31.31	V	61.07	73.98	12.91	PK
2390.0	14.18	0.03	31.31	V	45.52	53.98	8.46	AV
2483.5	32.29	0.00	31.37	H	63.66	73.98	10.32	PK
2483.5	15.21	0.03	31.37	H	46.61	53.98	7.37	AV
2483.5	32.55	0.00	31.37	V	63.92	73.98	10.06	PK
2483.5	15.23	0.03	31.37	V	46.63	53.98	7.35	AV

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2412 MHz, 2462 MHz
 Channel No.: 01 Ch, 11 Ch

Frequency [MHz]	Reading dBuV	A.F.+CL [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	25.07	31.31	H	56.38	73.98	17.60	PK
2390.0	13.08	31.31	H	44.39	53.98	9.59	AV
2390.0	25.45	31.31	V	56.76	73.98	17.22	PK
2390.0	13.10	31.31	V	44.41	53.98	9.57	AV
2483.5	24.64	31.37	H	56.01	73.98	17.97	PK
2483.5	13.72	31.37	H	45.09	53.98	8.89	AV
2483.5	25.14	31.37	V	56.51	73.98	17.47	PK
2483.5	14.17	31.37	V	45.54	53.98	8.44	AV

Operation Mode: 802.11n_20MHz BW
 Transfer MCS Index: 0
 Operating Frequency: 2412 MHz, 2462 MHz
 Channel No.: 01 Ch, 11 Ch

Frequency [MHz]	Reading dBuV	Duty Cycle Factor	A.F.+CL [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	25.57	0.00	31.31	H	56.88	73.98	17.10	PK
2390.0	13.80	0.04	31.31	H	45.15	53.98	8.84	AV
2390.0	25.78	0.00	31.31	V	57.09	73.98	16.89	PK
2390.0	13.71	0.04	31.31	V	45.06	53.98	8.93	AV
2483.5	25.79	0.00	31.37	H	57.16	73.98	16.82	PK
2483.5	14.08	0.04	31.37	H	45.49	53.98	8.50	AV
2483.5	26.10	0.00	31.37	V	57.47	73.98	16.51	PK
2483.5	14.13	0.04	31.37	V	45.54	53.98	8.44	AV


Notes:

1. Total = Reading Value + Antenna Factor + Cable Loss
2. We have done 802.11b/g/n mode and all data rate. Worst data rate is the lowest data of each mode.

3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. Total = Reading Value + Antenna Factor + Cable Loss (802.11b)
5. Total = Reading Value + Antenna Factor + Cable Loss + Duty Cycle Factor (802.11g/n)


■ RESULT PLOTS (Worst case : z-V)

Radiated Restricted Band Edges plot – Average Reading (802.11b, Ch.11)

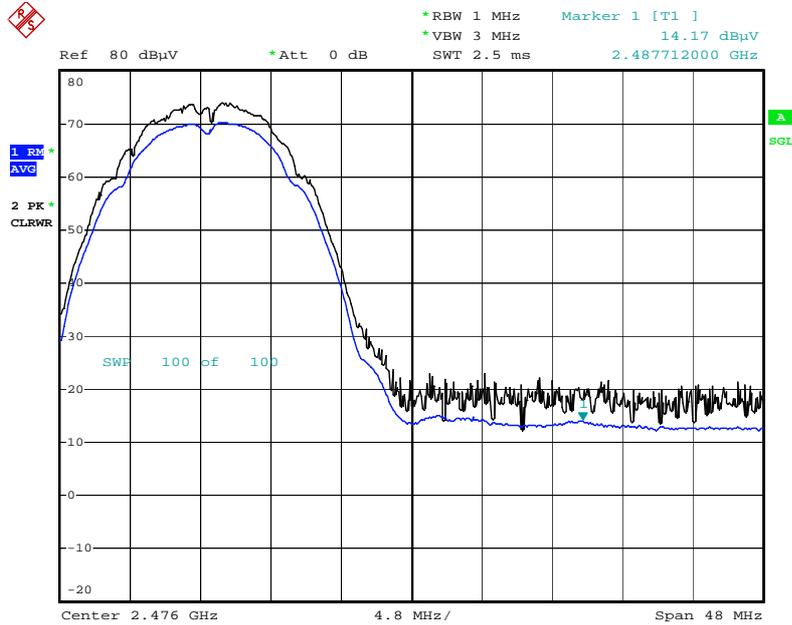


Date: 30.MAR.2016 16:13:34

Radiated Restricted Band Edges plot – Peak Reading (802.11b, Ch.11)

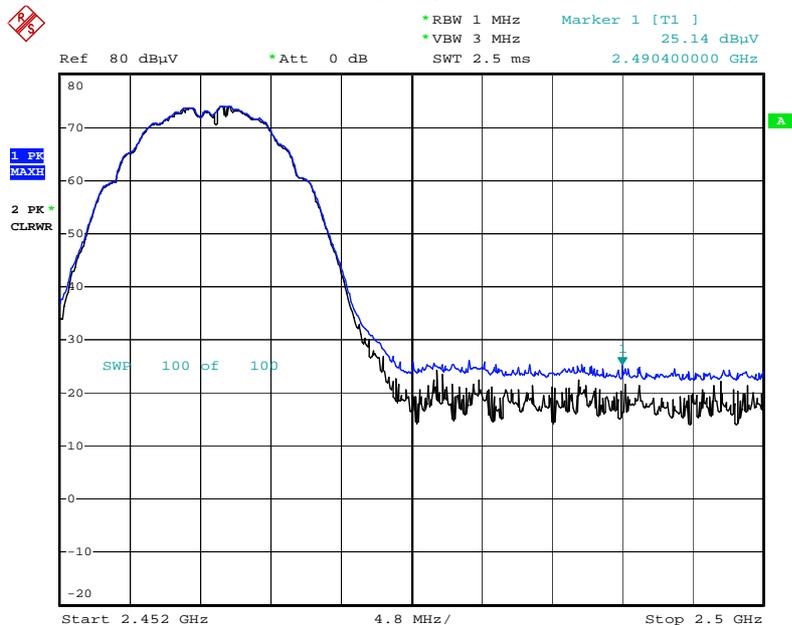


Date: 30.MAR.2016 16:12:53

Radiated Restricted Band Edges plot – Average Reading (802.11g, Ch.11)

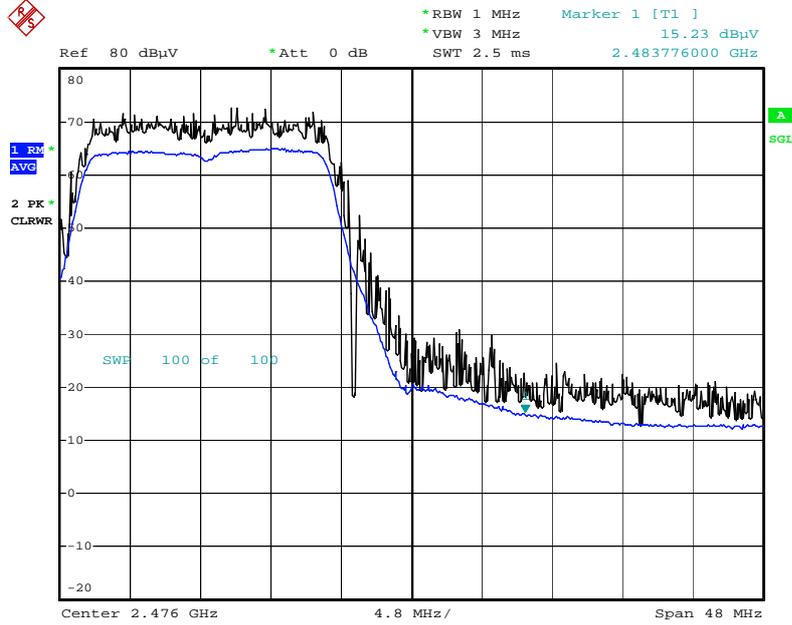


Date: 30.MAR.2016 12:18:22

Radiated Restricted Band Edges plot – Peak Reading (802.11g, Ch.11)

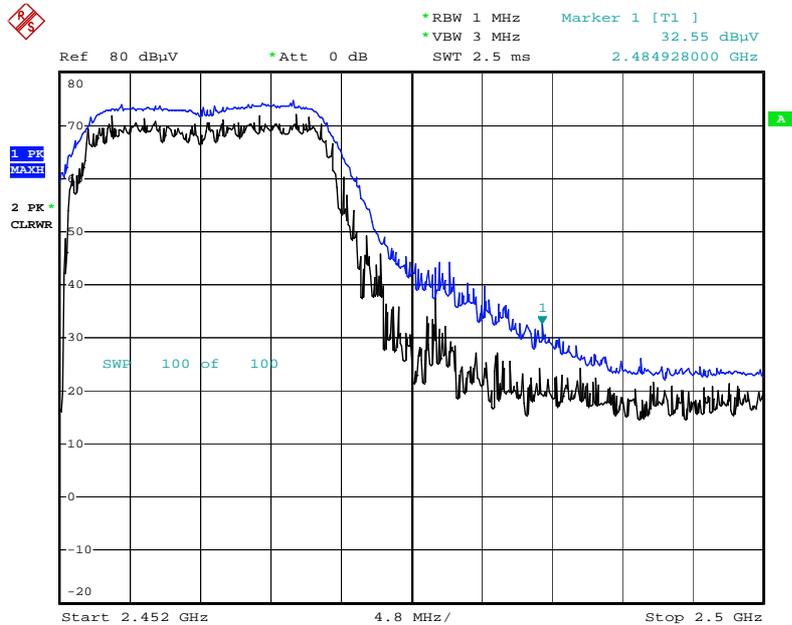


Date: 30.MAR.2016 12:17:40

Radiated Restricted Band Edges plot – Average Reading (802.11n_20MHz, Ch.11)

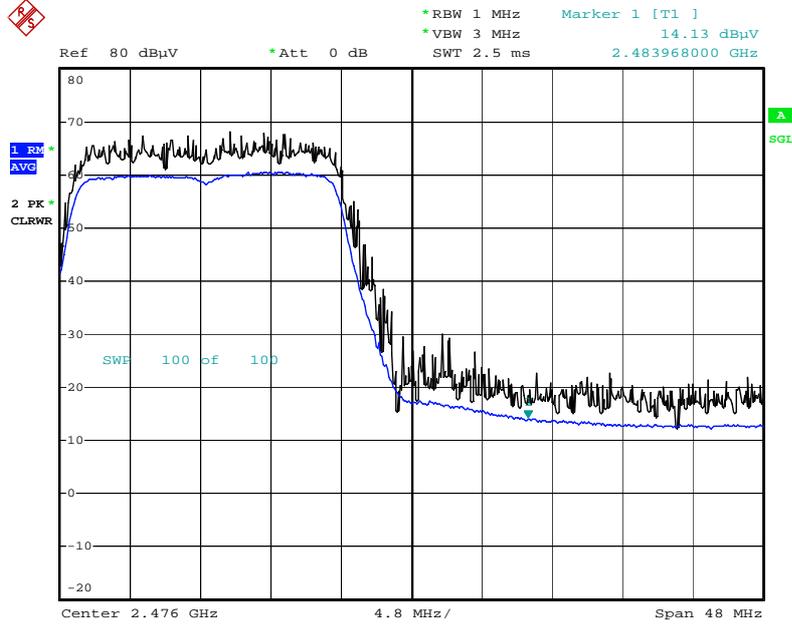

Date: 30.MAR.2016 12:19:56

Radiated Restricted Band Edges plot – Peak Reading (802.11n_20MHz, Ch.11)

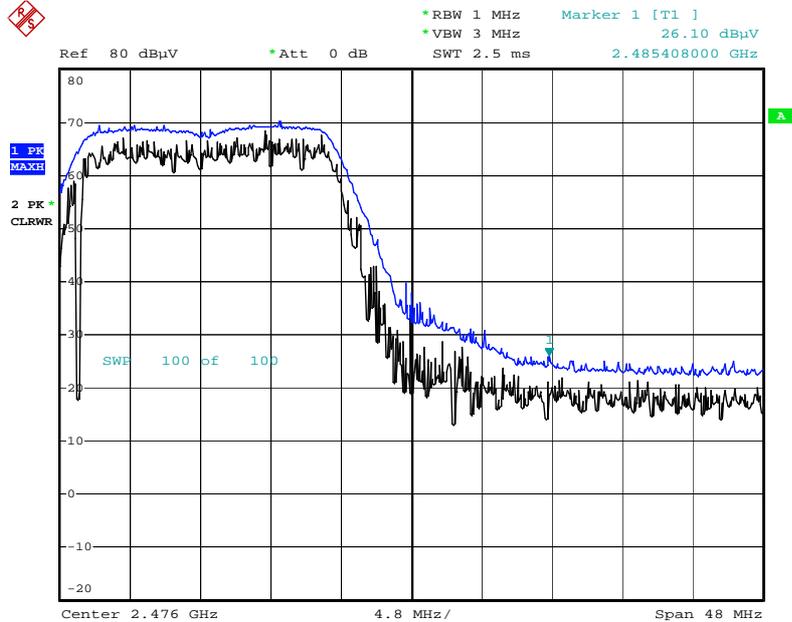

Date: 30.MAR.2016 12:20:35

Note : Only the worst case plots for Radiated Restricted Band Edges.

Stand alone with quick cover (open)

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2412 MHz, 2462 MHz
 Channel No.: 01 Ch, 11 Ch

Frequency [MHz]	Reading dBuV	Duty Cycle Factor	A.F.+CL [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	31.77	0.00	31.31	H	63.08	73.98	10.90	PK
2390.0	13.98	0.03	31.31	H	45.32	53.98	8.66	AV
2390.0	32.10	0.00	31.31	V	63.41	73.98	10.57	PK
2390.0	14.14	0.03	31.31	V	45.48	53.98	8.50	AV
2483.5	34.67	0.00	31.37	H	66.04	73.98	7.94	PK
2483.5	14.82	0.03	31.37	H	46.22	53.98	7.76	AV
2483.5	35.11	0.00	31.37	V	66.48	73.98	7.50	PK
2483.5	15.06	0.03	31.37	V	46.46	53.98	7.52	AV

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2412 MHz, 2462 MHz
 Channel No.: 01 Ch, 11 Ch

Frequency [MHz]	Reading dBuV	A.F.+CL [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	25.12	31.31	H	56.43	73.98	17.55	PK
2390.0	13.06	31.31	H	44.37	53.98	9.61	AV
2390.0	25.23	31.31	V	56.54	73.98	17.44	PK
2390.0	13.15	31.31	V	44.46	53.98	9.52	AV
2483.5	25.00	31.37	H	56.37	73.98	17.61	PK
2483.5	13.86	31.37	H	45.23	53.98	8.75	AV
2483.5	25.21	31.37	V	56.58	73.98	17.40	PK
2483.5	13.99	31.37	V	45.36	53.98	8.62	AV

Operation Mode: 802.11n_20MHz BW
 Transfer MCS Index: 0
 Operating Frequency: 2412 MHz, 2462 MHz
 Channel No.: 01 Ch, 11 Ch


Frequency [MHz]	Reading dBuV	Duty Cycle Factor	A.F.+CL [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	25.24	0.00	31.31	H	56.55	73.98	17.43	PK
2390.0	13.11	0.04	31.31	H	44.46	53.98	9.53	AV
2390.0	25.50	0.00	31.31	V	56.81	73.98	17.17	PK
2390.0	13.23	0.04	31.31	V	44.58	53.98	9.40	AV
2483.5	25.69	0.00	31.37	H	57.06	73.98	16.92	PK
2483.5	13.89	0.04	31.37	H	45.30	53.98	8.69	AV
2483.5	26.36	0.00	31.37	V	57.73	73.98	16.25	PK
2483.5	14.00	0.04	31.37	V	45.41	53.98	8.58	AV

Notes:

1. Total = Reading Value + Antenna Factor + Cable Loss
2. We have done 802.11b/g/n mode and all data rate. Worst data rate is the lowest data of each mode.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. Total = Reading Value + Antenna Factor + Cable Loss (802.11b)
5. Total = Reading Value + Antenna Factor + Cable Loss + Duty Cycle Factor (802.11g/n)


■ **RESULT PLOTS (Worst case : x-H)**

Radiated Restricted Band Edges plot – Average Reading (802.11b, Ch.11)

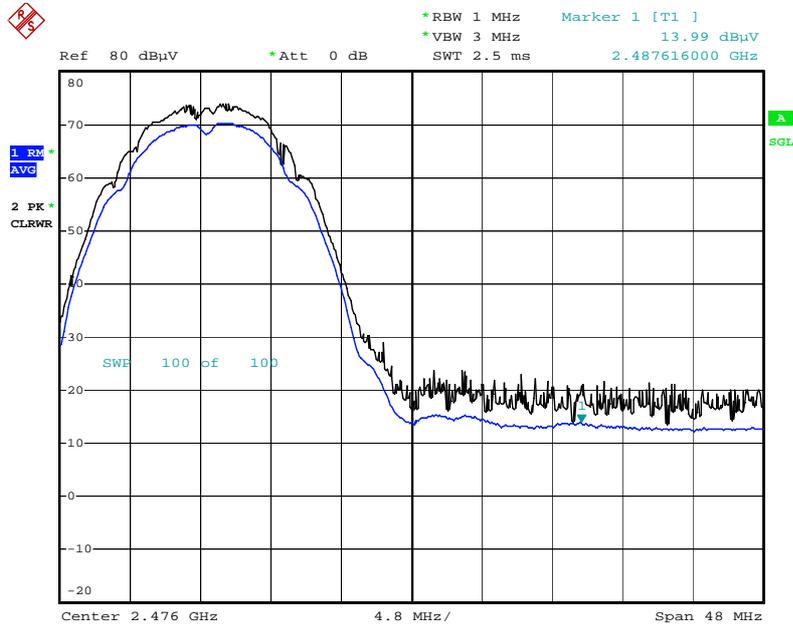


Date: 30.MAR.2016 15:54:26

Radiated Restricted Band Edges plot – Peak Reading (802.11b, Ch.11)

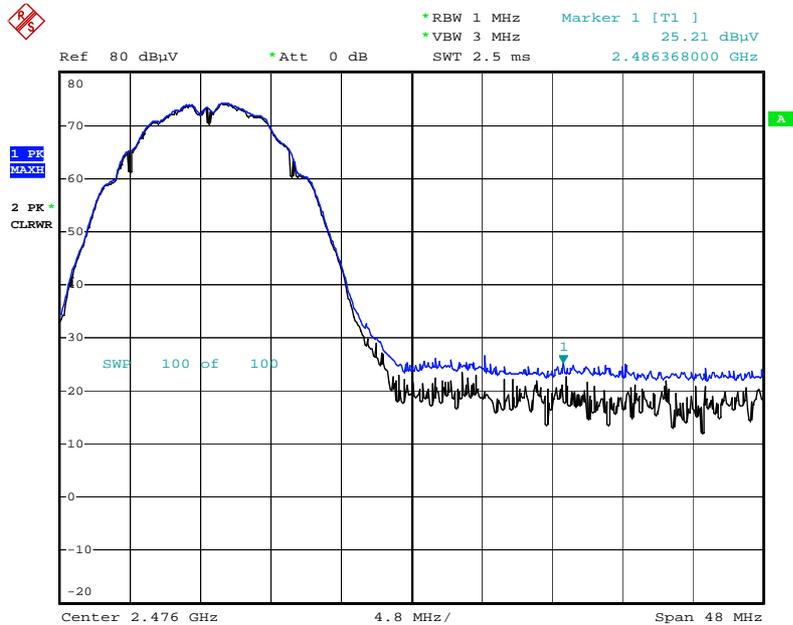


Date: 30.MAR.2016 15:53:55

Radiated Restricted Band Edges plot – Average Reading (802.11g, Ch.11)

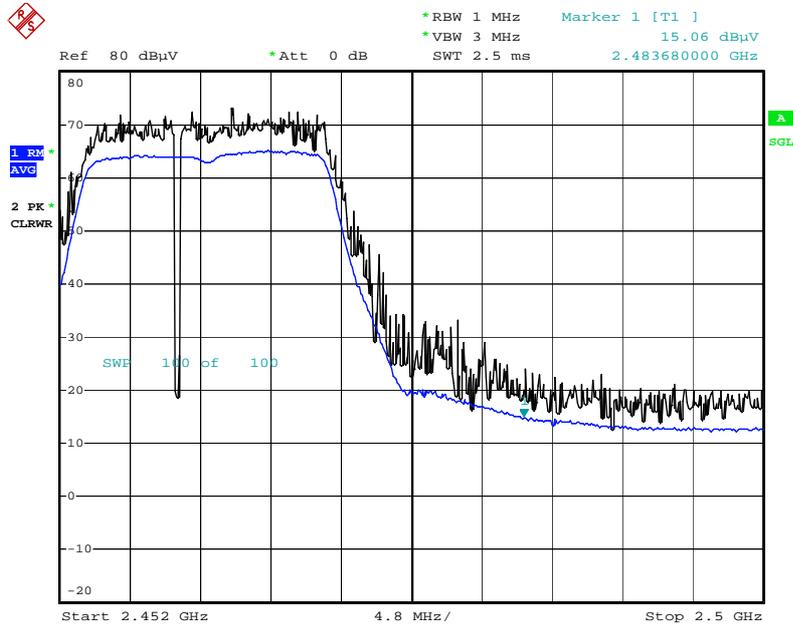


Date: 30.MAR.2016 15:43:40

Radiated Restricted Band Edges plot – Peak Reading (802.11g, Ch.11)

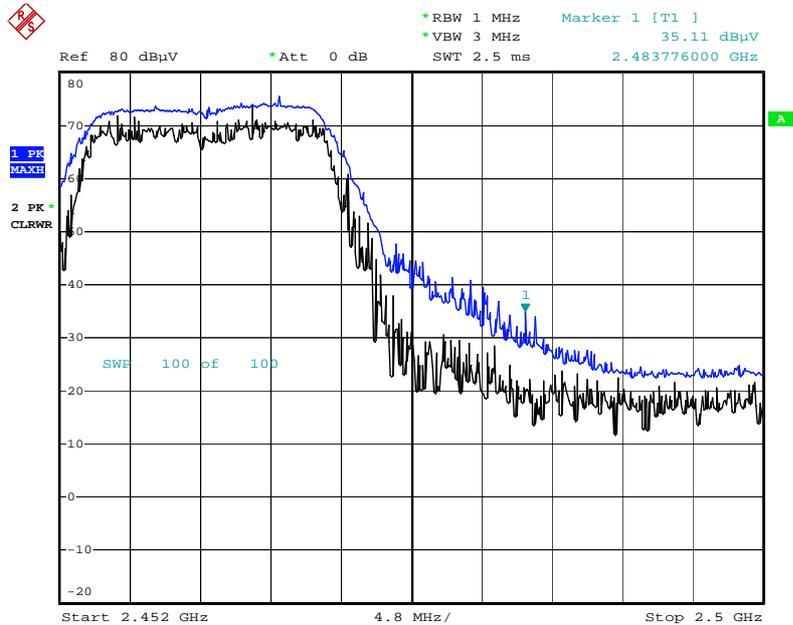


Date: 30.MAR.2016 15:45:20

Radiated Restricted Band Edges plot – Average Reading (802.11n_20MHz, Ch.11)

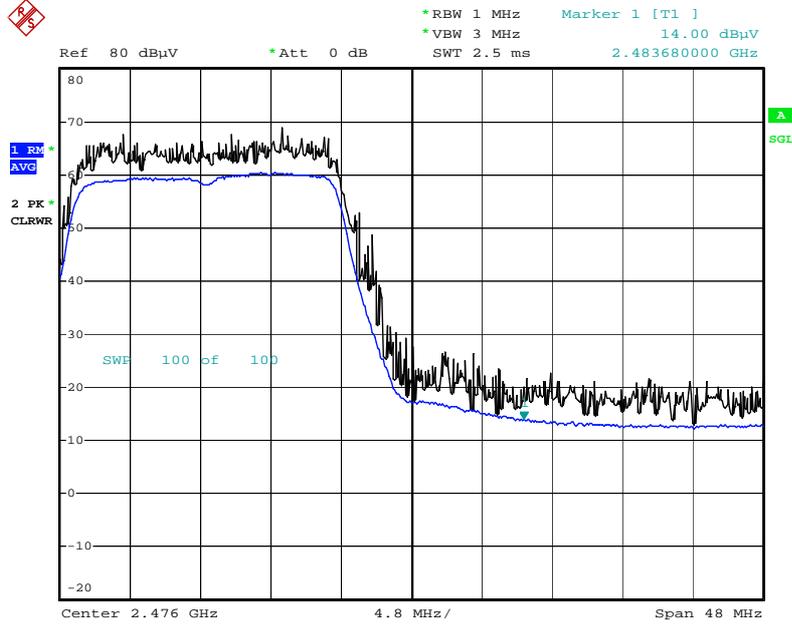

Date: 30.MAR.2016 15:55:44

Radiated Restricted Band Edges plot – Peak Reading (802.11n_20MHz, Ch.11)

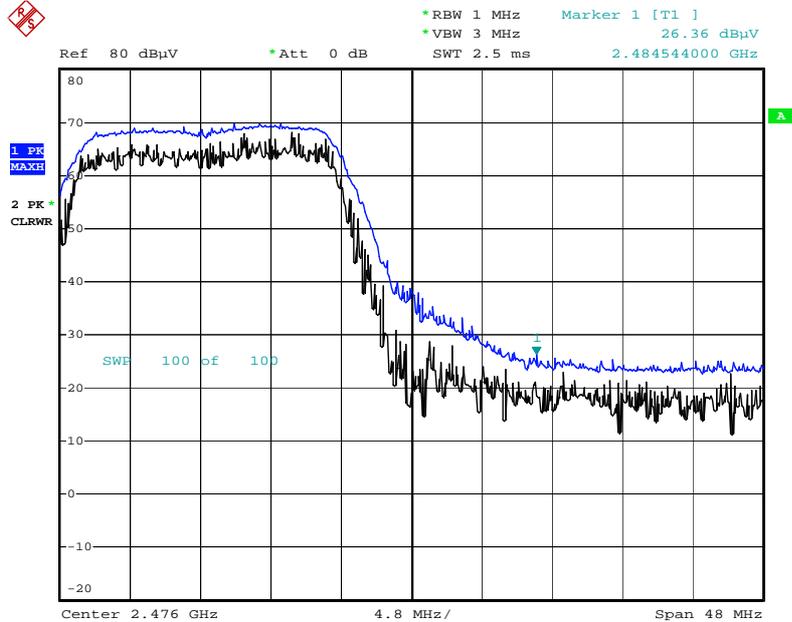

Date: 30.MAR.2016 15:57:07

Note : Only the worst case plots for Radiated Restricted Band Edges.

Stand alone with quick cover (close)

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency: 2412 MHz, 2462 MHz
 Channel No.: 01 Ch, 11 Ch

Frequency [MHz]	Reading dBuV	Duty Cycle Factor	A.F.+CL [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	30.11	0.00	31.31	H	61.42	73.98	12.56	PK
2390.0	14.15	0.03	31.31	H	45.49	53.98	8.49	AV
2390.0	30.05	0.00	31.31	V	61.36	73.98	12.62	PK
2390.0	14.24	0.03	31.31	V	45.58	53.98	8.40	AV
2483.5	32.85	0.00	31.37	H	64.22	73.98	9.76	PK
2483.5	15.48	0.03	31.37	H	46.88	53.98	7.10	AV
2483.5	33.04	0.00	31.37	V	64.41	73.98	9.57	PK
2483.5	15.65	0.03	31.37	V	47.05	53.98	6.93	AV

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency: 2412 MHz, 2462 MHz
 Channel No.: 01 Ch, 11 Ch

Frequency [MHz]	Reading dBuV	A.F.+CL [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	25.28	31.31	H	56.59	73.98	17.39	PK
2390.0	13.42	31.31	H	44.73	53.98	9.25	AV
2390.0	25.36	31.31	V	56.67	73.98	17.31	PK
2390.0	13.65	31.31	V	44.96	53.98	9.02	AV
2483.5	25.41	31.37	H	56.78	73.98	17.20	PK
2483.5	14.27	31.37	H	45.64	53.98	8.34	AV
2483.5	25.56	31.37	V	56.93	73.98	17.05	PK
2483.5	14.34	31.37	V	45.71	53.98	8.27	AV

Operation Mode: 802.11n_20MHz BW
 Transfer MCS Index: 0
 Operating Frequency: 2412 MHz, 2462 MHz
 Channel No.: 01 Ch, 11 Ch


Frequency [MHz]	Reading dBuV	Duty Cycle Factor	A.F.+CL [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	25.55	0.00	31.31	H	56.86	73.98	17.12	PK
2390.0	13.72	0.04	31.31	H	45.07	53.98	8.92	AV
2390.0	25.64	0.00	31.31	V	56.95	73.98	17.03	PK
2390.0	13.64	0.04	31.31	V	44.99	53.98	9.00	AV
2483.5	25.36	0.00	31.37	H	56.73	73.98	17.25	PK
2483.5	13.96	0.04	31.37	H	45.37	53.98	8.61	AV
2483.5	25.71	0.00	31.37	V	57.08	73.98	16.90	PK
2483.5	14.09	0.04	31.37	V	45.50	53.98	8.48	AV

Notes:

1. Total = Reading Value + Antenna Factor + Cable Loss
2. We have done 802.11b/g/n mode and all data rate. Worst data rate is the lowest data of each mode.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. Total = Reading Value + Antenna Factor + Cable Loss (802.11b)
5. Total = Reading Value + Antenna Factor + Cable Loss + Duty Cycle Factor (802.11g/n)


■ RESULT PLOTS (Worst case : x-H)

Radiated Restricted Band Edges plot – Average Reading (802.11b, Ch.11)

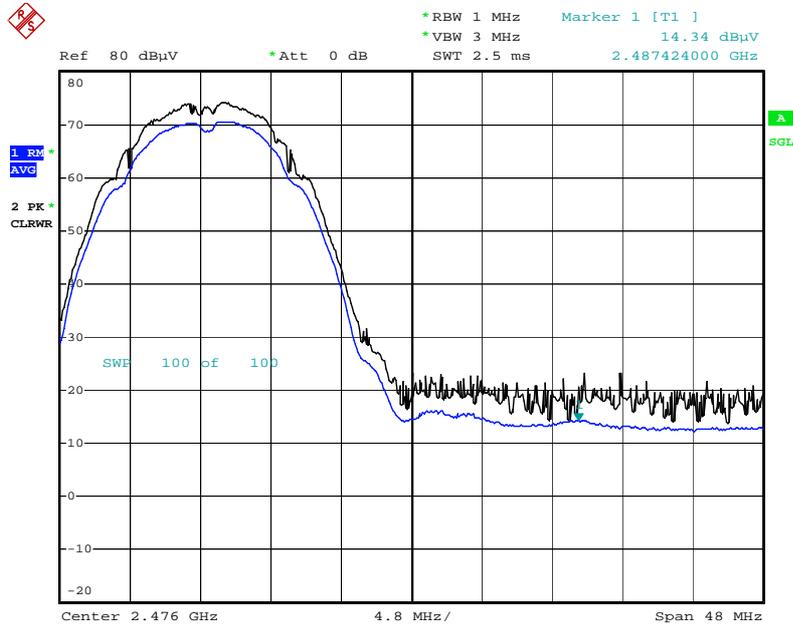


Date: 30.MAR.2016 12:25:31

Radiated Restricted Band Edges plot – Peak Reading (802.11b, Ch.11)

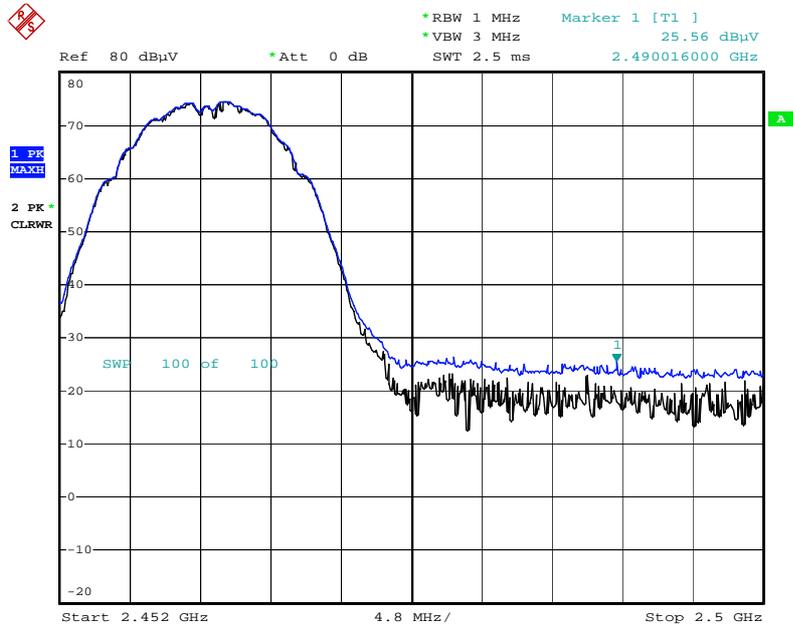


Date: 30.MAR.2016 12:26:41

Radiated Restricted Band Edges plot – Average Reading (802.11g, Ch.11)

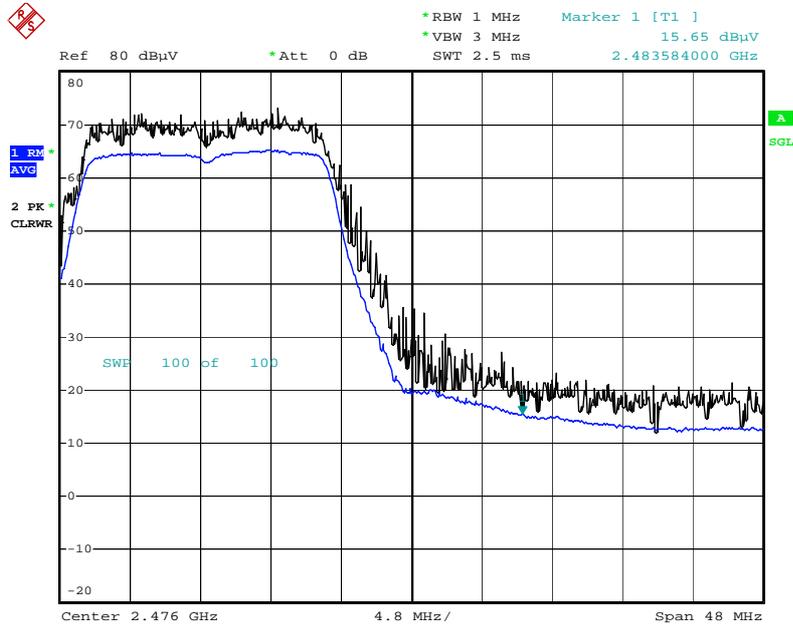


Date: 30.MAR.2016 12:28:38

Radiated Restricted Band Edges plot – Peak Reading (802.11g, Ch.11)

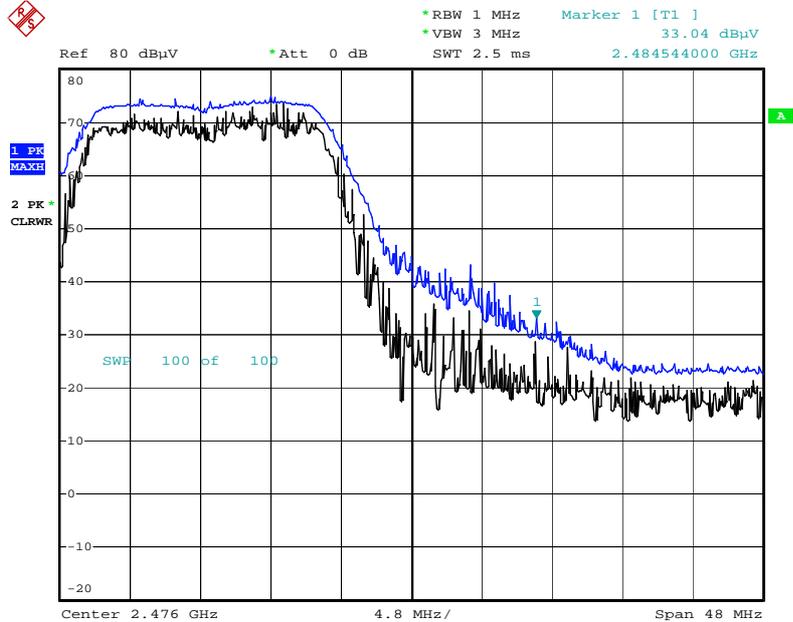


Date: 30.MAR.2016 12:28:07

Radiated Restricted Band Edges plot – Average Reading (802.11n_20MHz, Ch.11)

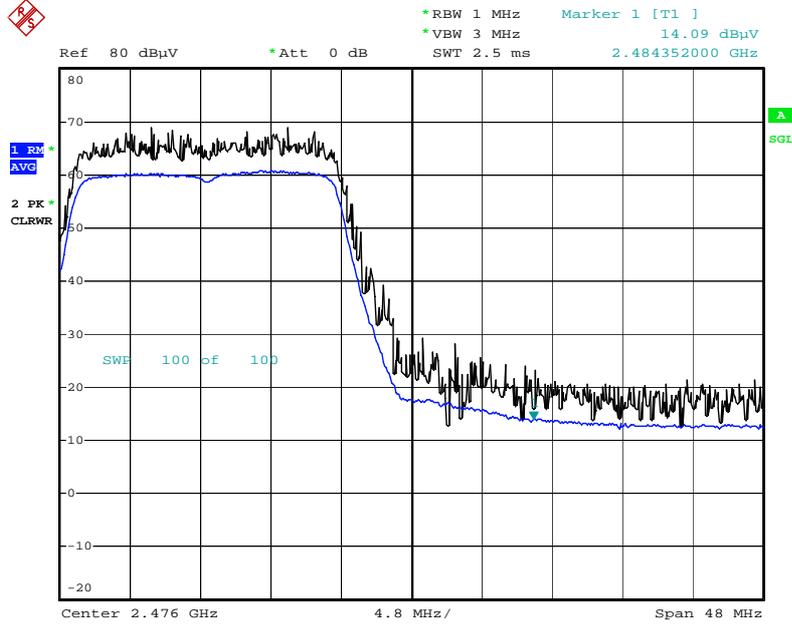

Date: 30.MAR.2016 12:23:50

Radiated Restricted Band Edges plot – Peak Reading (802.11n_20MHz, Ch.11)

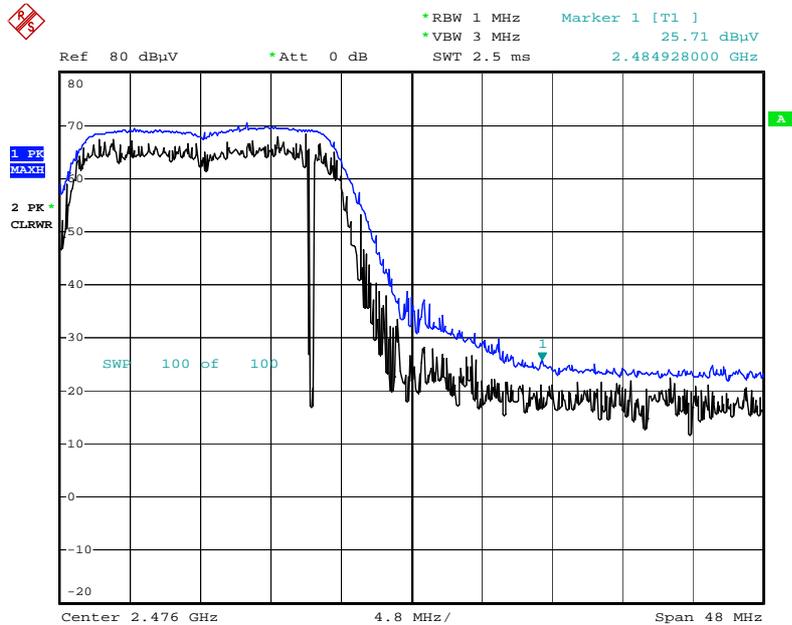

Date: 30.MAR.2016 12:23:16

Note : Only the worst case plots for Radiated Restricted Band Edges.

9.7 POWERLINE CONDUCTED EMISSIONS

Test Requirements and limit, §15.207

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dBµV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.
5. We are performed the AC Power Line Conducted Emission test for worst data rate, channel, operation mode.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

▣ RESULT PLOTS

Conducted Emissions (Line 1)

WLAN MODE 2.4G N


1 / 2

HCT TEST Report

Common Information

EUT: DM-02H
 Manufacturer: LG
 Test Site: SHIELD ROOM
 Operating Conditions: WLAN MODE_ 2.4G

FCC CLASS B

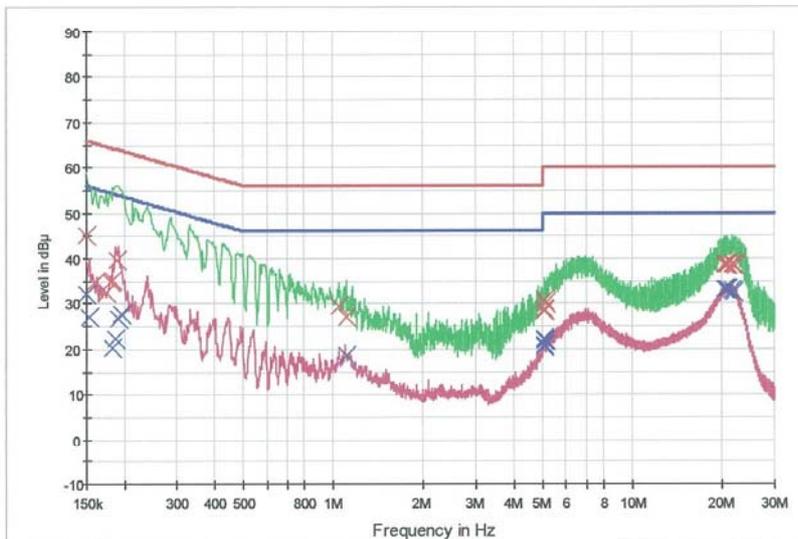

— FCC CLASS B_QP — FCC CLASS B_AV — Preview Result 1-PK+
 — Preview Result 2-AVG × Final Result 1-QPK × Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	45.0	9.000	Off	N	9.6	21.0	66.0
0.160000	34.8	9.000	Off	N	9.6	30.7	65.5
0.174000	32.7	9.000	Off	N	9.6	32.1	64.8
0.180000	34.8	9.000	Off	N	9.6	29.7	64.5
0.184000	35.2	9.000	Off	N	9.6	29.1	64.3
0.190000	39.6	9.000	Off	N	9.6	24.5	64.0
1.042000	29.6	9.000	Off	N	9.7	26.4	56.0
1.104000	27.2	9.000	Off	N	9.7	28.8	56.0
5.056000	28.8	9.000	Off	N	9.8	31.2	60.0
5.066000	28.3	9.000	Off	N	9.8	31.7	60.0
5.100000	30.7	9.000	Off	N	9.8	29.3	60.0
5.108000	30.3	9.000	Off	N	9.8	29.7	60.0
20.416000	38.5	9.000	Off	N	10.3	21.5	60.0
20.552000	38.6	9.000	Off	N	10.3	21.4	60.0
20.926000	38.6	9.000	Off	N	10.3	21.4	60.0
21.546000	38.8	9.000	Off	N	10.3	21.2	60.0
21.968000	38.5	9.000	Off	N	10.3	21.5	60.0
22.112000	38.4	9.000	Off	N	10.3	21.6	60.0

Final Result 2

2016-04-13

오전 10:41:25

WLAN MODE 2.4G N

2 / 2

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	32.1	9.000	Off	N	9.6	23.9	56.0
0.154000	27.0	9.000	Off	N	9.6	28.8	55.8
0.184000	20.1	9.000	Off	N	9.6	34.2	54.3
0.188000	22.4	9.000	Off	N	9.6	31.7	54.1
0.192000	26.9	9.000	Off	N	9.6	27.1	53.9
0.196000	27.8	9.000	Off	N	9.6	26.0	53.8
1.104000	18.7	9.000	Off	N	9.7	27.3	46.0
5.056000	21.0	9.000	Off	N	9.8	29.0	50.0
5.066000	20.5	9.000	Off	N	9.8	29.5	50.0
5.090000	22.3	9.000	Off	N	9.8	27.7	50.0
5.100000	22.0	9.000	Off	N	9.8	28.0	50.0
5.108000	21.9	9.000	Off	N	9.8	28.1	50.0
20.416000	33.1	9.000	Off	N	10.3	16.9	50.0
20.552000	33.2	9.000	Off	N	10.3	16.8	50.0
20.718000	33.2	9.000	Off	N	10.3	16.8	50.0
20.926000	33.2	9.000	Off	N	10.3	16.8	50.0
21.546000	33.0	9.000	Off	N	10.3	17.0	50.0
21.784000	32.7	9.000	Off	N	10.3	17.3	50.0

Conducted Emissions (Line 2)

WLAN MODE 2.4G L1


1 / 2

HCT TEST Report

Common Information

EUT: DM-02H
 Manufacturer: LG
 Test Site: SHIELD ROOM
 Operating Conditions: WLAN MODE _ 2.4G

FCC CLASS B

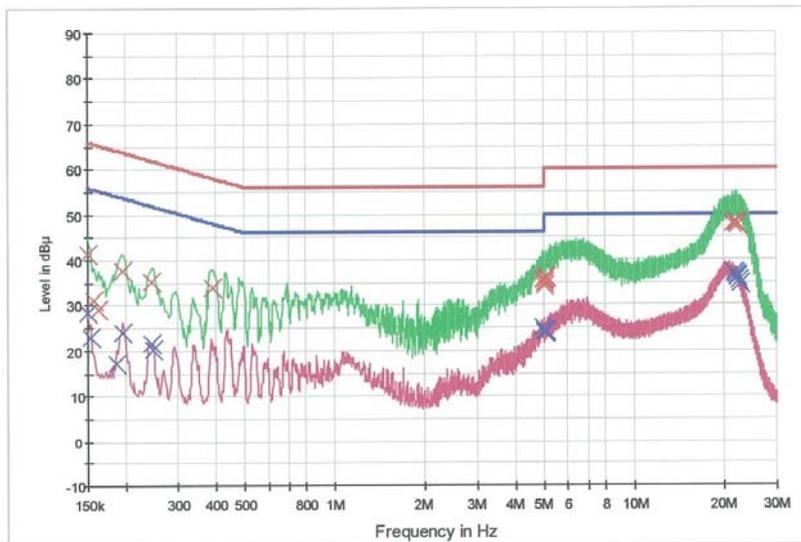

— FCC CLASS B_QP — FCC CLASS B_AV — Preview Result 1-PK+
 — Preview Result 2-AVG × Final Result 1-QPK × Final Result 2-CAV

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	41.5	9.000	Off	L1	9.7	24.5	66.0
0.158000	31.1	9.000	Off	L1	9.6	34.5	65.6
0.162000	29.0	9.000	Off	L1	9.6	36.4	65.4
0.196000	37.6	9.000	Off	L1	9.6	26.1	63.8
0.246000	35.1	9.000	Off	L1	9.6	26.8	61.9
0.390000	33.9	9.000	Off	L1	9.7	24.2	58.1
4.954000	35.7	9.000	Off	L1	9.9	20.3	56.0
4.984000	34.8	9.000	Off	L1	9.9	21.2	56.0
5.022000	35.5	9.000	Off	L1	9.9	24.5	60.0
5.036000	34.1	9.000	Off	L1	9.9	25.9	60.0
5.066000	36.2	9.000	Off	L1	9.9	23.8	60.0
5.072000	35.8	9.000	Off	L1	9.9	24.2	60.0
21.306000	47.8	9.000	Off	L1	10.3	12.2	60.0
21.776000	47.7	9.000	Off	L1	10.3	12.3	60.0
21.832000	48.1	9.000	Off	L1	10.3	11.9	60.0
21.846000	47.7	9.000	Off	L1	10.3	12.3	60.0
21.944000	47.7	9.000	Off	L1	10.3	12.3	60.0
22.020000	47.6	9.000	Off	L1	10.3	12.4	60.0

Final Result 2

2016-04-13

오전 10:55:42

WLAN MODE 2.4G L1

2 / 2

Frequency (MHz)	CAverage (dBμV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	28.5	9.000	Off	L1	9.7	27.5	56.0
0.154000	23.1	9.000	Off	L1	9.6	32.6	55.8
0.188000	17.1	9.000	Off	L1	9.6	37.1	54.1
0.196000	24.0	9.000	Off	L1	9.6	29.8	53.8
0.244000	21.5	9.000	Off	L1	9.6	30.5	52.0
0.248000	20.3	9.000	Off	L1	9.6	31.5	51.8
4.954000	25.0	9.000	Off	L1	9.9	21.0	46.0
4.984000	24.2	9.000	Off	L1	9.9	21.8	46.0
5.022000	24.0	9.000	Off	L1	9.9	26.0	50.0
5.036000	24.2	9.000	Off	L1	9.9	25.8	50.0
5.066000	24.0	9.000	Off	L1	9.9	26.0	50.0
5.078000	24.4	9.000	Off	L1	9.9	25.6	50.0
21.726000	36.8	9.000	Off	L1	10.3	13.2	50.0
21.832000	36.8	9.000	Off	L1	10.3	13.2	50.0
22.020000	36.3	9.000	Off	L1	10.3	13.7	50.0
22.224000	35.8	9.000	Off	L1	10.3	14.2	50.0
22.378000	35.4	9.000	Off	L1	10.3	14.6	50.0
22.558000	34.7	9.000	Off	L1	10.3	15.3	50.0

2016-04-13

오전 10:55:42

10. LIST OF TEST EQUIPMENT

10.1 LIST OF TEST EQUIPMENT(Conducted Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216/ LISN	12/28/2015	Annual	100073
Rohde & Schwarz	ESCI / TEST RECEIVER	12/28/2015	Annual	100584
Agilent	E4440A/ Spectrum Analyzer	03/08/2016	Annual	US45303008
Agilent	N9020A / SIGNAL ANALYZER	06/30/2015	Annual	MY51110085
Agilent	N9030A / SIGNAL ANALYZER	11/24/2015	Annual	MY49431210
Agilent	N1911A/Power Meter	07/09/2015	Annual	MY45100523
Agilent	N1921A /Power Sensor	03/11/2016	Annual	MY52260025
Agilent	87300B/Directional Coupler	11/30/2015	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	06/15/2015	Annual	5001
Hewlett Packard	E3632A / DC POWER SUPPLY	03/09/2016	Annual	KR75303962
Agilent	8493C / Attenuator(10 dB)	07/23/2015	Annual	07560
Rohde & Schwarz	CBT / BLUETOOTH TESTER	05/11/2015	Annual	100422

10.2 LIST OF TEST EQUIPMENT(Radiated Test)

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Schwarzbeck	VULB 9160/ TRILOG Antenna	10/10/2014	Biennial	3368
Audix	AM4000 / Antenna Position Tower	N/A	N/A	N/A
Audix	Turn Table	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
CERNEX	CBL18265035 / POWER AMP	07/27/2015	Annual	22966
Schwarzbeck	BBHA 9120D/ Horn Antenna	05/07/2015	Biennial	937
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	09/03/2015	Biennial	BBHA9170541
Rohde & Schwarz	FSP / Spectrum Analyzer	09/24/2015	Annual	100688
Rohde & Schwarz	FSV40-N / Spectrum Analyzer	09/23/2015	Annual	101068-SZ
Wainwright Instrument	WHF3.0/18G-10EF / High Pass Filter	06/29/2015	Annual	8
Wainwright Instrument	WRCJV2400/2483.5-2370/2520- 60/12SS / Band Reject Filter	07/06/2015	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	01/26/2016	Annual	2
Agilent	8493C-10 / Attenuator(10 dB)	08/20/2015	Annual	76649
Rohde & Schwarz	LOOP ANTENNA	02/23/2016	Biennial	1513-175
CERNEX	CBL06185030 / POWER AMP	07/21/2015	Annual	22965
CERNEX	CBLU1183540 / POWER AMP	07/21/2015	Annual	22964
CERNEX	CBL26405040 / Power Amplifier	07/09/2015	Annual	25956
Rohde & Schwarz	CBT / BLUETOOTH TESTER	05/11/2015	Annual	100422