

# TEST REPORT



**DT&C Co., Ltd.**

42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 17042

Tel : 031-321-2664, Fax : 031-321-1664

1. Report No : DRTFCC1803-0051(1)
2. Customer
  - Name : LG Electronics MobileComm USA, Inc.
  - Address : 1000 Sylvan Ave., Englewood Cliffs, New Jersey, United States, 07632
3. Use of Report : FCC Original Grant
4. Product Name / Model Name : Mobile Phone / DS1803  
FCC ID : ZNFDS1803
5. Test Method Used : ANSI C63.10-2013  
Test Specification : FCC Part 15.225
6. Date of Test : 2018.02.27 ~ 2018.03.09
7. Testing Environment : Refer to appended test report.
8. Test Result : Refer to the attached test result.

Affirmation	Tested by	Reviewed by
	Name : SunGeun Lee (Signature)	Name : Geunki Son (Signature)

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DT&C Co., Ltd.

2018 . 03 . 16 .

**DT&C Co., Ltd.**

If this report is required to confirmation of authenticity, please contact to [report@dtnc.net](mailto:report@dtnc.net)

## Test Report Version

Test Report No.	Date	Description
DRTFCC1803-0051	Mar. 12, 2018	Initial issue
DRTFCC1803-0051(1)	Mar. 16, 2018	Revised the section 1.1.

## CONTENTS

<b>1. General Information</b> .....	<b>4</b>
1.1. Testing Laboratory .....	4
1.2. Testing Environment.....	4
1.3. Measurement Uncertainty .....	4
1.4. Details of Applicant.....	5
1.5. Description of EUT .....	5
1.6. EUT CAPABILITIES .....	5
<b>2. Information about test items</b> .....	<b>6</b>
2.1 Test mode.....	6
2.2 Tested frequency .....	6
2.3 EMI Suppression Device(s)/Modifications .....	6
<b>3. Antenna requirements</b> .....	<b>6</b>
<b>4. Test report</b> .....	<b>7</b>
4.1 Summary of tests .....	7
4.2 Transmitter requirements.....	8
4.2.1 20dB bandwidth .....	8
4.2.2 In-band emissions .....	9
4.2.4 Out-of-band emissions .....	11
4.2.5 Frequency Stability.....	13
4.2.6 AC Line Conducted Emissions .....	14
<b>APPENDIX</b> .....	<b>19</b>

## 1. General Information

### 1.1. Testing Laboratory

<b>DT&amp;C Co., Ltd.</b>	
The 3 m test site and conducted measurement facility used to collect the radiated data are located at the 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 17042. The test site comply with the requirements of § 2.948 according to ANSI 63.4-2014.	
- FCC MRA Accredited Test Firm No. : KR0034	
<a href="http://www.dtn.net">www.dtn.net</a>	
Telephone	: + 82-31-321-2664
FAX	: + 82-31-321-1664

### 1.2. Testing Environment

Ambient Condition	
▪ Temperature	+20 ~ 25 °C
▪ Relative Humidity	40 ~ 45 %

### 1.3. Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with requirements of ANSI C 63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence.

Parameter	Measurement uncertainty
<i>AC conducted emission</i>	$\pm 2.4$ dB (The confidence level is about 95 %, $k = 2$ )
<i>Radiated Disturbance (Below 1 GHz)</i>	$\pm 5.1$ dB (The confidence level is about 95 %, $k = 2$ )

#### 1.4. Details of Applicant

Applicant : LG Electronics MobileComm USA, Inc.  
 Address : 1000 Sylvan Ave., Englewood Cliffs, New Jersey, United States, 07632  
 Contact person : Kyung-Su Han

#### 1.5. Description of EUT

<b>FCC Equipment Class</b>	Low Power Communications Device Transmitter(DXX)
<b>EUT</b>	Mobile Phone
<b>Model Name</b>	DS1803
<b>Add Model Name</b>	NA
<b>Serial Number</b>	Identical prototype
<b>Power Supply</b>	DC 3.85 V
<b>Frequency Band</b>	13.56 MHz
<b>Modulation Type</b>	ASK
<b>Channel(s)</b>	1
<b>Antenna type</b>	Loop Antenna

#### 1.6. EUT CAPABILITIES

This EUT contains the following capabilities:

850/1900 GSM/GPRS, WCDMA/HSUPA, LTE, 802.11b/g/n WLAN(2.4GHz), 802.11a/n/ac WLAN(5GHz), Bluetooth(BDR, EDR, LE), NFC

## 2. Information about test items

### 2.1 Test mode

<b>Test mode1</b>	Continuous transmitting mode
-------------------	------------------------------

Note 1: The worst case data rate was determined according to the fundamental emission level. And data rate was tested at the worst case(106kbps).

### 2.2 Tested frequency

Channel	TX Frequency(MHz)
<b>Lowest</b>	<b>13.56</b>
<b>Middle</b>	-
<b>Highest</b>	-

### 2.3 EMI Suppression Device(s)/Modifications

EMI suppression device(s) added and/or modifications made during testing  
 → None

## 3. Antenna requirements

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

**The antenna is attached on the device by means of unique coupling method (Spring Tension).  
 Therefore this E.U.T Complies with the requirement of §15.203**

## 4. Test report

### 4.1 Summary of tests

FCC part section(s)	RSS section(s)	Parameter	Limit	Test condition	Status Note 1
2.1049	-	20 dB Bandwidth	-	Radiated <sup>Note 2</sup>	C
-	RSS-Gen [ 6.6 ]	Occupied Bandwidth	-		NA
15.225 (a)	RSS-210 [ B6(a) ]	In-Band Emissions	15,848 $\mu\text{V}/\text{m}$ @ 30 m 13.553 – 13.567 MHz		C
15.225 (b)	RSS-210 [ B6(b) ]	In-Band Emissions	334 $\mu\text{V}/\text{m}$ @ 30 m 13.410 – 13.553 MHz 13.567 – 13.710 MHz		C
15.225 (c)	RSS-210 [ B6(c) ]	In-Band Emissions	106 $\mu\text{V}/\text{m}$ @ 30 m 13.110 – 13.410 MHz 13.710 – 14.010 MHz		C
15.225 (d) 15.209	RSS-210 [ B6(d) ] RSS-GEN [ 8.9 ]	Out-of Band Emissions	Emissions outside of the specified band (13.110-14.010 MHz) must meet the radiated limits detailed in 15.209		C
15.225 (e)	RSS-210 [ B6 ]	Frequency Stability	$\pm 0.01$ % of operating frequency	Temp & Humid Test Chamber	C
15.207	RSS-Gen [ 8.8 ]	AC Conducted Emissions	FCC Part 15.207	AC Line Conducted	C
15.203	-	Antenna Requirements	FCC Part 15.203	-	C

Note 1: **C**=Comply **NC**=Not Comply **NT**=Not Tested **NA**=Not Applicable

Note 2: For radiated emission tests below 30 MHz were performed on semi-anechoic chamber which is correlated with OATS.

## 4.2 Transmitter requirements

### 4.2.1 20dB bandwidth


**- Procedure:**

The 20 dB Bandwidth is measured with a spectrum analyzer connected via a receive antenna placed near the EUT while the EUT is operating in transmission mode.

And spectrum analyzer setting use following test procedure of **ANCSI C63.10-2013 – Section 6.9.2.**

1. Center frequency = EUT channel center frequency
2. Span = 2 ~ 5 times the OBW
3. RBW = 1 % ~ 5 % OBW
4. VBW ≥ 3 x RBW
5. Detector = Peak
6. Trace = Max hold
7. The trace was allowed to stabilize
8. Determine the reference value = Set the spectrum analyzer marker to the highest level of the displayed trace
9. Using the marker-delta function of the instrument, determine the “-xx dB down amplitude” using [(reference value) - xx].
10. Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.


**- Measurement Data: Comply**

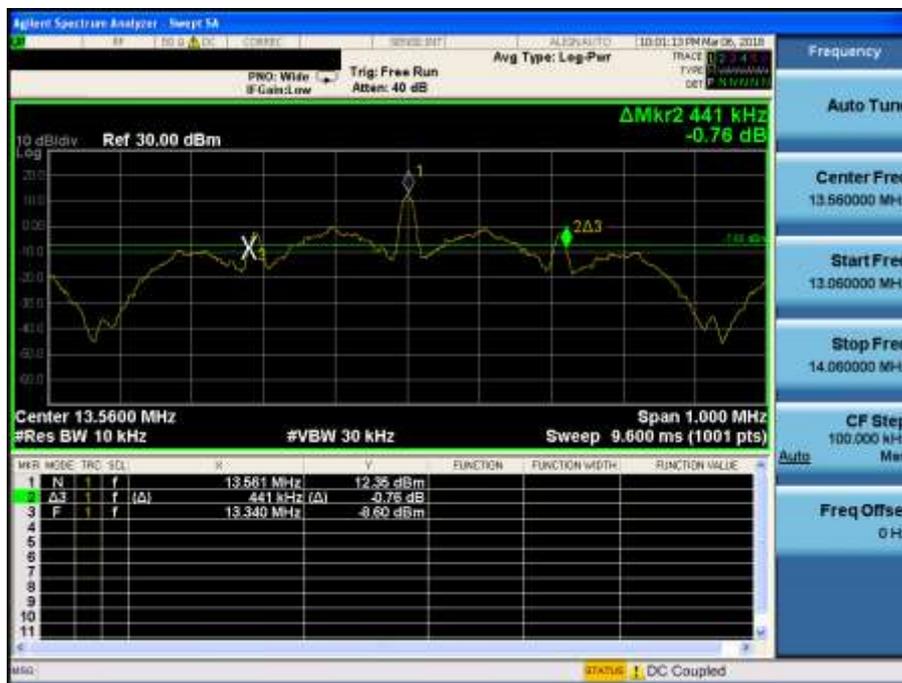

**- Minimum Standard: NA**

4.2.2 In-band emissions

- Test Configuration

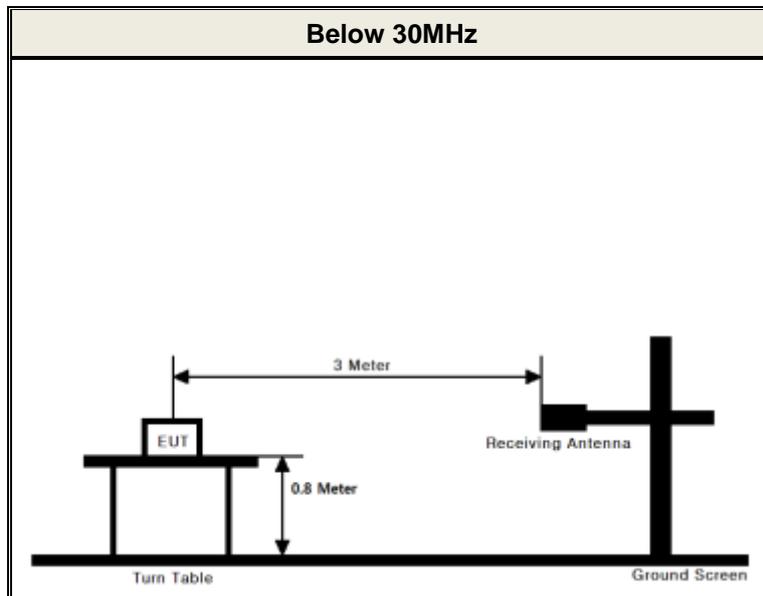

- **Procedure:** The radiated emission was tested according to the **section 6.4 of the ANSI C63.10-2013.**

The EUT was placed on a 0.8 m high non-conductive table and it was placed at 3m distance from the antenna. Measurements were performed for each of the three antenna orientations. (ie. parallel, perpendicular, and ground-parallel)

Also, measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions.

RBW = As specified in below table, VBW ≥ 3 x RBW, Sweep = Auto, Detector = Peak  
Trace mode = Max Hold until the trace stabilizes.

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

- **Minimum Standard: Part 15.225(a), (b), (c) & RSS-210 [ B6(a), (b), (c) ]**

Frequency Band [MHz]	Limit at 30 m measurement distance	
	[uV/m]	[dBuV/m]
13.553-13.567	15,848	84.00
13.410-13.553 13.567-13.710	334	50.47
13.110-13.410 13.710-14.010	106	40.51

**- Measurement Data:**

Tested Frequency : 13.56 MHz  
 Measurement Distance : 3 Meters

Test Frequency Band [MHz]	Freq. [MHz]	EUT Axis.	ANT (Note 1)	Reading Level [dBuV]	T.F [dB/m]	Field Strength @3 m [dBuV/m]	Field Strength @30 m [dBuV/m]	Limit [dBuV/m]	Margin [dB]
13.110 ~ 13.410	13.349	Z	P	26.10	9.90	36.00	-4.00	40.51	44.51
13.410 ~ 13.553	13.552	Z	P	33.90	9.80	43.70	3.70	50.47	46.77
13.553 ~ 13.567	13.561	Z	P	39.90	9.80	49.70	9.70	84.00	74.30
13.567 ~ 13.710	13.569	Z	P	33.50	9.80	43.30	3.30	50.47	47.17
13.710 ~ 14.010	13.774	Z	P	25.90	9.80	35.70	-4.30	40.51	44.81

**Note 1.** Loop antenna orientation

“P”: Parallel, “V”: perpendicular, “G”: ground-parallel

**Note 2.** This test item was performed at 3 m and the data were extrapolated to the specified measurement distance of 30 m using the square of an inverse linear distance extrapolation factor (40 dB/decade) as specified in §15.31(f)2.

▪ Extrapolation Factor =  $20 \log_{10}(30/3)^2 = 40$  dB

**Note 3.** All data were recorded using a spectrum analyzer employing a peak detector.

If PK results were meet Quasi-peak limit, Quasi-peak measurements were omitted.

**Note 4.** Sample Calculation.


Margin = Limit – Field Strength @ 30 m / Field Strength @ 30 m = Field Strength @ 3 m – 40 dB

Field Strength @ 3 m = Reading + T.F / T.F = AF + CL

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss

4.2.4 Out-of-band emissions

- Test configuration

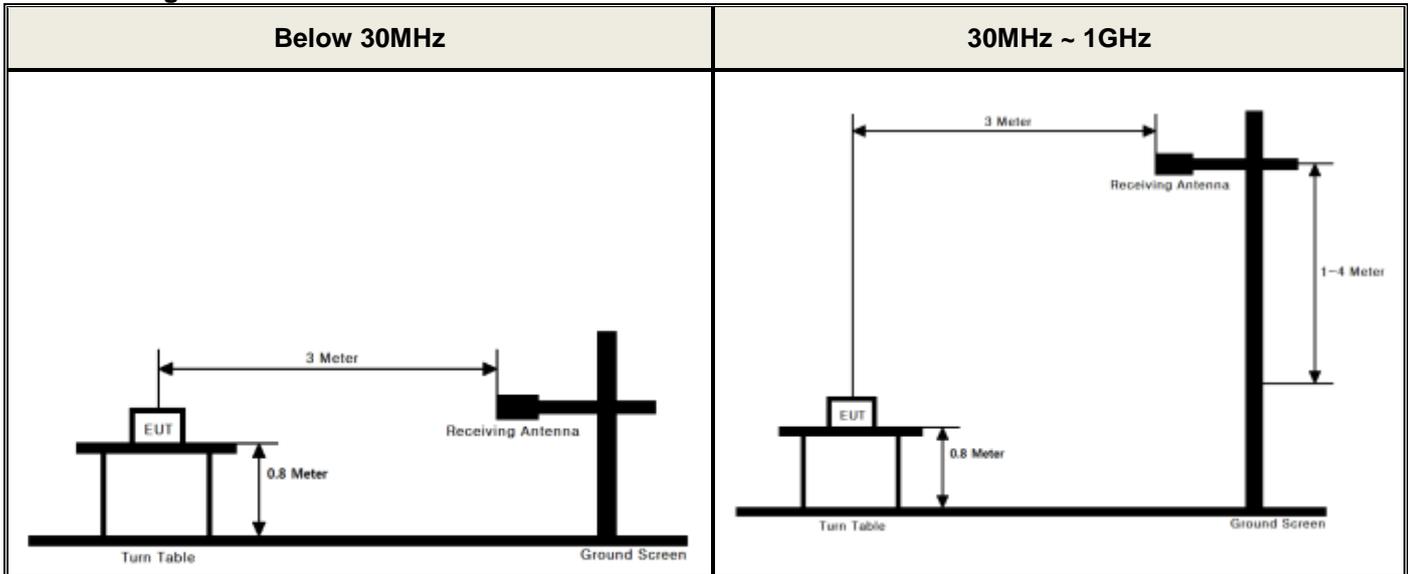

- Procedure: The radiated emission was tested according to the section 6.4, 6.5 of the ANSI C63.10-2013.

The EUT was tested from 9 kHz up to the 1 GHz excluding the band 13.110-14.010 MHz.

A The EUT was placed on a 0.8 m high non-conductive table and it was placed at 3m distance from the antenna. For measurements below 30MHz were performed for each of the three antenna orientations. (ie. parallel, perpendicular, and ground-parallel) For measurements above 30MHz were performed for each of the both horizontal and vertical polarizations.

Also, measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions.

RBW = As specified in below table, VBW ≥ 3 x RBW, Sweep = Auto, Detector = Peak  
Trace mode = Max Hold until the trace stabilizes.

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

- Minimum Standard: Part 15.209, 225(d) & RSS-210[B6(d)], RSS-GEN[8.9]

• FCC Part 15.209(a):

Frequency [MHz]	Field Strength [uV/m]	Measurement Distance [Meters]
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30	30	30
30 ~ 88	100 **	3
88 ~ 216	150 **	3
216 ~ 960	200 **	3
Above 960	200	3

\*\* Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

• FCC Part 15.209(b):

In the emission table above, the tighter limit applies at the band edges.

**- Measurement Data:**

Tested Frequency : 13.56 MHz  
 Measurement Distance : 3 Meters

Frequency [MHz]	EUT Axis.	ANT (Note 1)	Reading [dBUV]	T.F [dB/m]	Distance factor [dB/m]	Field Strength [dBUV/m]	Limit [dBUV/m]	Margin [dB]
1.852	Z	P	32.1	11.3	40	3.4	29.5	26.1
3.079	Z	P	27.6	11.1	40	-1.3	29.5	30.8
3.453	Z	P	28.8	11.1	40	-0.1	29.5	29.6
4.971	Z	P	22.5	10.9	40	-6.6	29.5	36.1
21.740	Z	P	24.8	8.5	40	-6.7	29.5	36.2
25.820	Z	P	30.7	7.8	40	-1.5	29.5	31.0
45.520	Z	V	40.8	-13.9	0	26.9	40.0	13.1
47.460	Z	H	29.4	-13.8	0	15.6	40.0	24.4
59.100	Z	H	28.2	-14.3	0	13.9	40.0	26.1
76.560	Z	V	32.8	-16.3	0	16.5	40.0	23.5
148.34	Z	V	28.6	-11.1	0	17.5	43.5	26.0
159.98	Z	H	27.5	-10.5	0	17.0	43.5	26.5
235.64	Z	H	28.3	-10.5	0	17.8	46.0	28.2
659.526	Z	V	29.2	2.4	0	31.6	46.0	14.4

**Note 1.** Loop antenna orientation (30 MHz Below)

“P”= Parallel, “V”= perpendicular, “G”= ground-parallel

Bilog antenna polarization (30 MHz above)

“H”= Horizontal, “V”= Vertical

**Note 2.** All data were recorded using a spectrum analyzer employing a peak detector.

If PK results were meet Quasi-peak limit, Quasi-peak measurements were omitted.

**Note 3.** No other spurious and harmonic emissions were reported greater than listed emissions above table.

**Note 4.** Sample calculation

Margin = Limit – Field Strength

Field Strength = Reading + T.F – Distance factor

T.F = AF + CL – AG

Distance factor =  $20\log(\text{Measurement distance} / \text{The measured distance})^2$

Where, T.F = Total Factor, AF = Antenna Factor, CL = Cable Loss, AG = Amplifier Gain

### 4.2.5 Frequency Stability

**- Procedure:**

Part 15.225 requires that devices operating in the 13.553 – 13.567 MHz shall maintain the carrier frequency within 0.01 % of the operating frequency over the temperature variation of -20 degrees to + 50 degrees C at normal supply voltage.

**- Measurement Data: Comply**

Operating Frequency : 13,560,000 Hz

VOLTAGE (%)	POWER (V <sub>DC</sub> )	TEMP (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100%	3.850	+20(ref)	13,560,345	345	0.002544
100%		-20	13,560,320	320	0.002360
100%		-10	13,560,324	324	0.002389
100%		0	13,560,334	334	0.002463
100%		+10	13,560,339	339	0.002500
100%		+20	13,560,345	345	0.002544
100%		+30	13,560,348	348	0.002566
100%		+40	13,560,351	351	0.002588
100%		+50	13,560,356	356	0.002625
115%		4.428	20	13,560,339	339
BATT.ENDPOINT	3.550	20	13,560,334	334	0.002463

**- Minimum Standard: Part 15. 225(e) & RSS-210 [B6]**

The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01$  % of the operating frequency.

#### 4.2.6 AC Line Conducted Emissions

##### - Test Requirements and limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

\* Decreases with the logarithm of the frequency

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

##### - Test Configuration

See test photographs for the actual connections between EUT and support equipment.

##### - Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors – Quasi Peak and Average Detector.

- **Measurement Data: Comply** (refer to the next page)

Measurement Data

Results of Conducted Emission



DTNC

Date 2018-03-09

Order No.	DTNC1802-01142	Reference No.	
Model No.	DS1803	Power Supply	
Serial No.		Temp/Humi.	23/44
Test Condition	NFC	Operator	S.G.LEE

Memo

LIMIT : FCC P15.207 QP  
FCC P15.207 AV

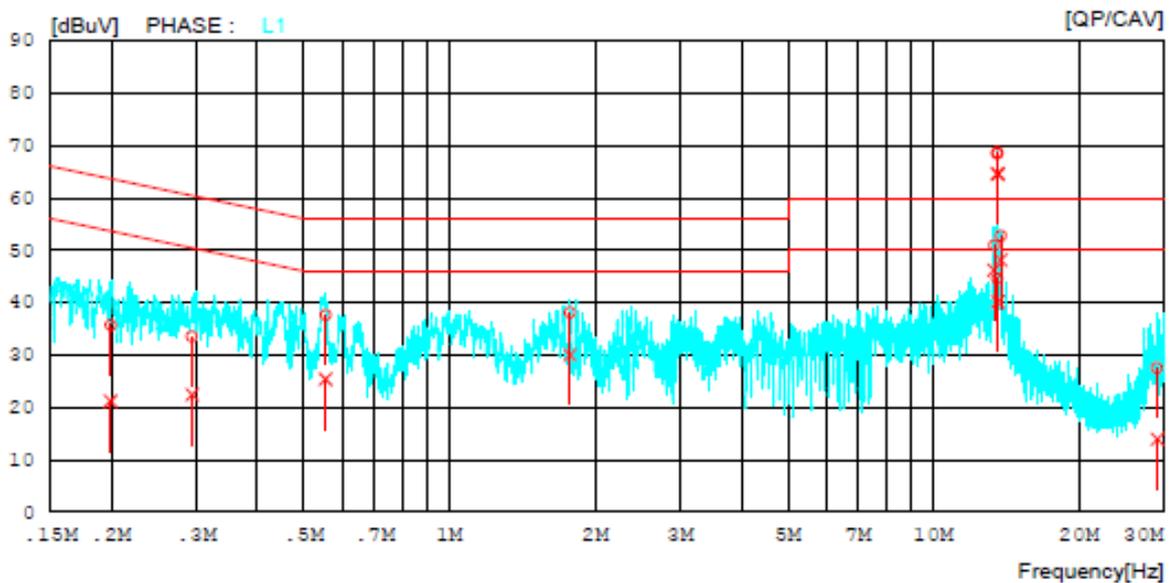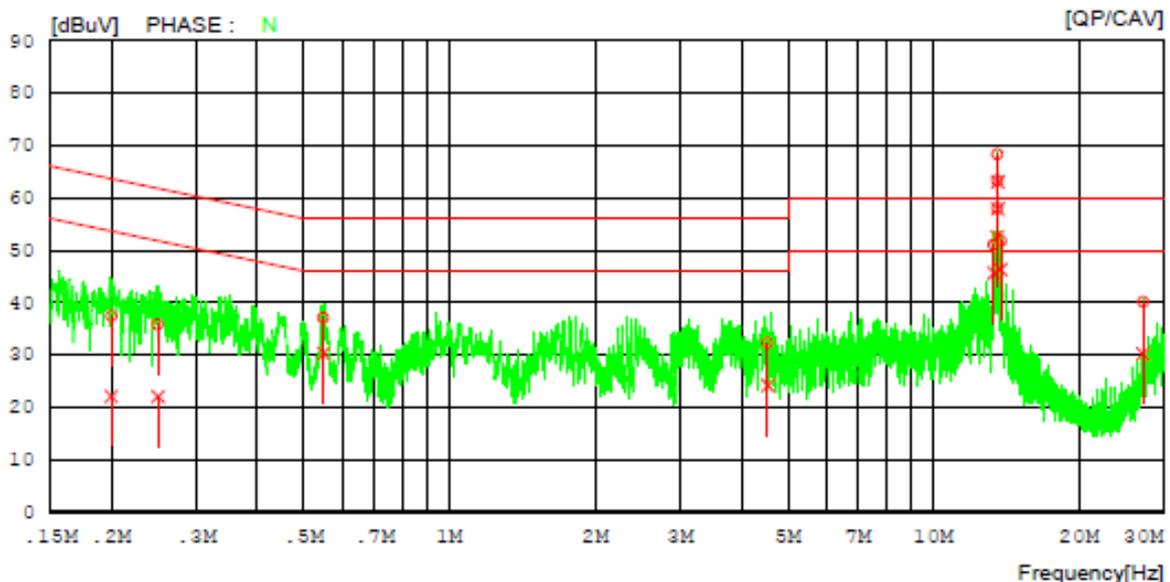

**Measurement Data**

## Results of Conducted Emission

DTNC

Date 2018-03-09

Order No.	DTNC1802-01142	Reference No.	
Model No.	DS1803	Power Supply	
Serial No.		Temp/Humi.	23/44
Test Condition	NFC	Operator	S.G.LEE

**Memo**

 LIMIT : FCC P15.207 QP  
 FCC P15.207 AV

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	CAV [dBuV]		QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]	
1	0.19992	27.43	12.19	9.94	37.37	22.13	63.61	53.61	26.24	31.48	N
2	0.24953	25.81	12.10	9.95	35.76	22.05	61.77	51.77	26.01	29.72	N
3	0.54867	27.04	20.29	9.98	37.02	30.27	56.00	46.00	18.98	15.73	N
4	4.54700	22.26	14.06	10.07	32.33	24.13	56.00	46.00	23.67	21.87	N
5	13.34720	40.82	35.36	10.27	51.09	45.63	60.00	50.00	8.91	4.37	N
6	13.55500	47.73	42.34	10.28	58.01	52.62	60.00	50.00	1.99	-2.62	N
7	13.56040	58.03	52.74	10.28	68.31	63.02	60.00	50.00	-8.31	-13.02	N
8	13.56500	52.98	47.65	10.28	63.26	57.93	60.00	50.00	-3.26	-7.93	N
9	13.77220	41.48	36.02	10.28	51.76	46.30	60.00	50.00	8.24	3.70	N
10	27.12220	29.67	19.68	10.50	40.17	30.18	60.00	50.00	19.83	19.82	N
11	0.19949	25.72	11.16	9.94	35.66	21.10	63.63	53.63	27.97	32.53	L1
12	0.29385	23.53	12.44	9.96	33.49	22.40	60.41	50.41	26.92	28.01	L1
13	0.55445	27.64	15.35	9.98	37.62	25.33	56.00	46.00	18.38	20.67	L1
14	1.77440	28.02	19.94	10.03	38.05	29.97	56.00	46.00	17.95	16.03	L1
15	13.35160	40.62	35.89	10.27	50.89	46.16	60.00	50.00	9.11	3.84	L1
16	13.56000	58.11	54.19	10.28	68.39	64.47	60.00	50.00	-8.39	-14.47	L1
17	13.56040	58.27	54.36	10.28	68.55	64.64	60.00	50.00	-8.55	-14.64	L1
18	13.57000	34.19	29.82	10.28	44.47	40.10	60.00	50.00	15.53	9.90	L1
19	13.77320	42.37	37.79	10.28	52.65	48.07	60.00	50.00	7.35	1.93	L1
20	29.01640	16.97	3.42	10.48	27.45	13.90	60.00	50.00	32.55	36.10	L1

**Measurement Data(With antenna terminated)**



**Results of Conducted Emission**

DTNC Date 2018-03-09

Order No.	DTNC1802-01142	Reference No.	
Model No.	DS1803	Power Supply	
Serial No.		Temp/Humi.	23/44
Test Condition	NFC	Operator	S.G.LEE

Memo

LIMIT : FCC P15.207 QP  
FCC P15.207 AV

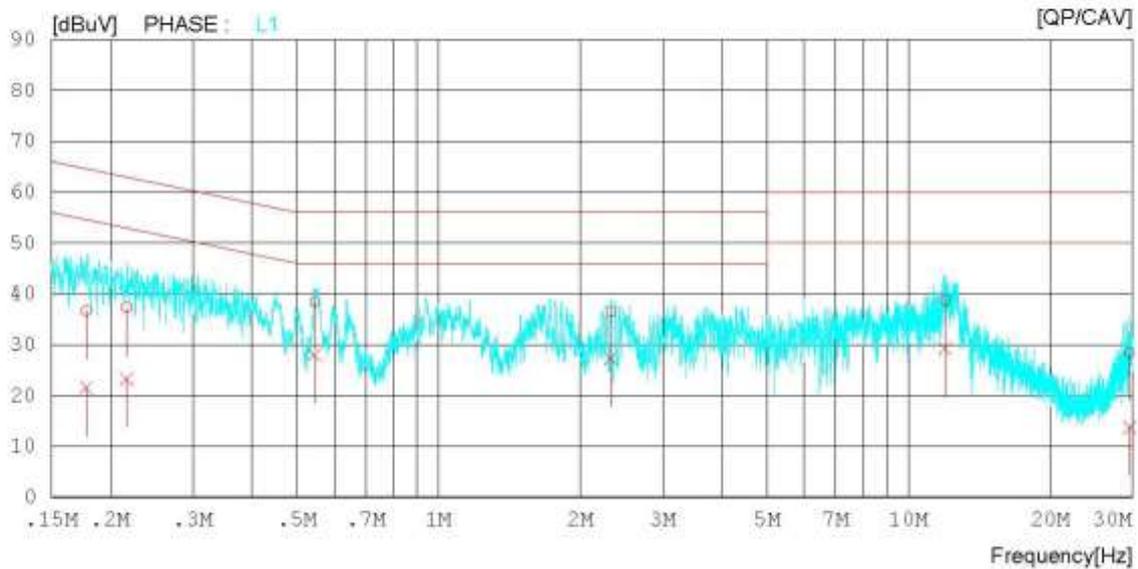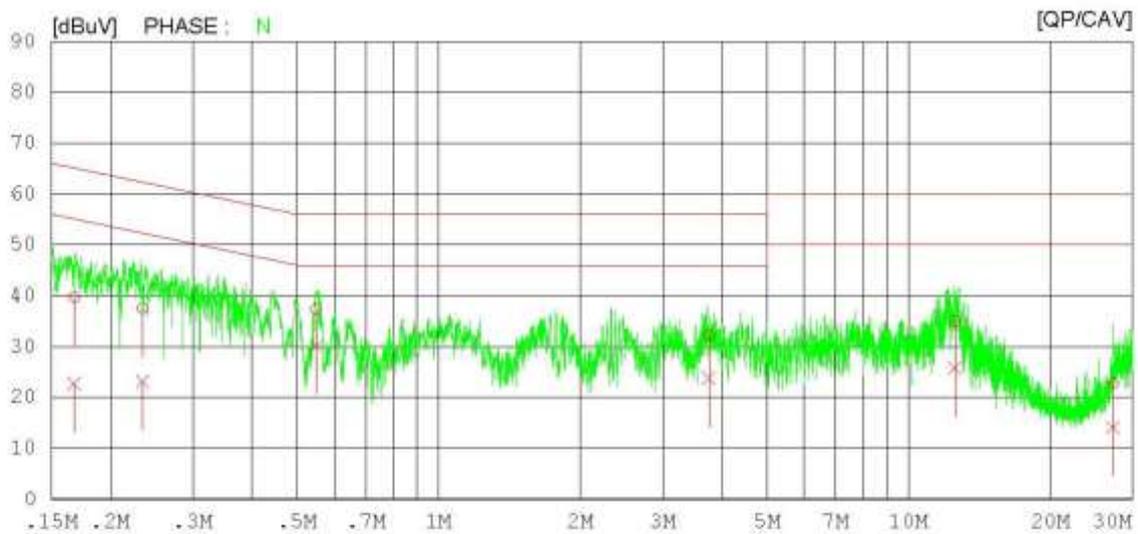

**Measurement Data(With antenna terminated)**

## Results of Conducted Emission

 DTNC Date 2018-03-09

Order No.	DTNC1802-01142	Reference No.	
Model No.	DS1803	Power Supply	
Serial No.		Temp/Humi.	23/44
Test Condition	NFC	Operator	S.G.LEE

Memo

 LIMIT : FCC P15.207 QP  
 FCC P15.207 AV

NO	FREQ [MHz]	READING		C.FACTOR [dB]	RESULT		LIMIT		MARGIN		PHASE
		QP [dBuV]	CAV [dBuV]		QP [dBuV]	CAV [dBuV]	QP [dBuV]	CAV [dBuV]			
1	0.16755	29.70	12.74	9.97	39.67	22.71	65.08	55.08	25.41	32.37	N
2	0.23421	27.58	13.16	9.95	37.53	23.11	62.30	52.30	24.77	29.19	N
3	0.54896	27.25	20.15	9.98	37.23	30.13	56.00	46.00	18.77	15.87	N
4	3.75640	22.09	13.76	10.06	32.15	23.82	56.00	46.00	23.85	22.18	N
5	12.58760	24.74	15.44	10.25	34.99	25.69	60.00	50.00	25.01	24.31	N
6	27.26760	12.26	3.59	10.49	22.75	14.08	60.00	50.00	37.25	35.92	N
7	0.17801	26.75	11.52	9.96	36.71	21.48	64.58	54.58	27.87	33.10	L1
8	0.21653	27.25	13.29	9.94	37.19	23.23	62.95	52.95	25.76	29.72	L1
9	0.54532	28.41	17.94	9.98	38.39	27.92	56.00	46.00	17.61	18.08	L1
10	2.32560	26.42	17.21	10.04	36.46	27.25	56.00	46.00	19.54	18.75	L1
11	11.95280	28.49	18.94	10.23	38.72	29.17	60.00	50.00	21.28	20.83	L1
12	29.59600	17.93	3.29	10.48	28.41	13.77	60.00	50.00	31.59	36.23	L1

# APPENDIX

## TEST EQUIPMENT FOR TESTS

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent Technologies	N9020A	17/07/12	18/07/12	MY46471601
Multimeter	FLUKE	17B	17/12/26	18/12/26	26030065WS
DC Power Supply	Agilent	66332A	17/09/05	18/09/05	MY43000719
DC Power Supply	Agilent	66332A	17/12/27	18/12/27	US37473833
Signal Generator	Rohde Schwarz	SMBV100A	17/12/27	18/12/27	255571
Thermohygrometer	BODYCOM	BJ5478	18/01/03	19/01/03	120612-2
Loop Antenna	ETS	6502	17/03/24	19/03/24	3471
BILOG ANTENNA	Schwarzbeck	VULB 9160	16/08/05	18/08/05	9160-3362
PreAmplifier	H.P	8447D	17/12/26	18/12/26	2944A07774
EMI Test Receiver	Rohde Schwarz	ESR7	17/02/16	18/02/16	101061
			18/02/13	19/02/13	
EMI Test Receiver	Rohde Schwarz	ESCI7	17/02/16	18/02/16	100910
			18/02/12	19/02/12	
PULSE LIMITER	Rohde Schwarz	ESH3-Z2	17/09/29	18/09/29	101333
LISN	SCHWARZBECK	NNLK 8121	17/04/03	18/04/03	06183
Temp & Humi Test Chamber	SJ Science	SJ-TH-S50	17/09/07	18/09/07	U5542113

Note: The measurement antennas were calibrated in accordance to the requirements of ANSI C63.5-2017.