

HCT CO., LTD.

CERTIFICATE OF COMPLIANCE FCC Certification

Applicant Name:
LG Electronics MobileComm U.S.A., Inc.

Address:
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Date of Issue:
May 06, 2013

Test Site/Location:
HCT CO., LTD., 105-1, Jangam-ri, Majang-Myeon,
Icheon-si, Kyunggi-Do, Korea

Report No.: HCTR1304FR31-2

HCT FRN: 0005866421

FCC ID : ZNFE450J

APPLICANT : LG Electronics MobileComm U.S.A., Inc.

FCC Model(s): LG-E450j

Additional FCC Model(s): LGE450j, E450j

EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n

Max. RF Output Power: Wi-Fi 802.11b(20.37 dBm) / Wi-Fi 802.11g (18.89 dBm) / Wi-Fi 802.11n_20 MHz (17.83 dBm) / Wi-Fi 802.11n_40 MHz (18.37 dBm)

Frequency Range: 2412 MHz - 2462 MHz (2.4 GHz Band)
2422 MHz - 2452 MHz (2.4 GHz Band)_40 MHz BW

Modulation type CCK/DSSS/OFDM

FCC Classification: Digital Transmission System(DTS)

FCC Rule Part(s): Part 15.247

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)



Report prepared by
: Jong Seok Lee
Test engineer of RF Team



Approved by
: Chang Seok Choi
Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1304FR31-2	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCTR1304FR31	April 25, 2013	- First Approval Report.
HCTR1304FR31-1	May 03, 2013	- Changed KDB Paragraph numbering.
HCTR1304FR31-2	May 06, 2013	- Change the font

Table of Contents

1. GENERAL INFORMATION	4
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE	5
3.3 GENERAL TEST PROCEDURES	5
3.4 DESCRIPTION OF TEST MODES	5
4. INSTRUMENT CALIBRATION.....	6
5. FACILITIES AND ACCREDITATIONS.....	6
5.1 FACILITIES	6
5.2 EQUIPMENT	6
6. ANTENNA REQUIREMENTS	7
7. SUMMARY TEST OF RESULTS.....	8
8. TEST RESULT.....	9
8.1 6dB BANDWIDTH (802.11b/g/n)	9
8.2 OUTPUT POWER (802.11b/g/n)	1 7
8.3 POWER SPECTRAL DENSITY (802.11b/g/n).....	1 1 2
8.4 OUT OF BAND EMISSIONS AT THE BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS	1 2 0
8.5 RADIATED MEASUREMENT.....	1 4 5
8.5.1 RADIATED SPURIOUS EMISSIONS.....	1 4 5
8.5.2 RADIATED RESTRICTED BAND EDGES	1 6 0
8.6 POWERLINE CONDUCTED EMISSIONS	1 6 3
9. LIST OF TEST EQUIPMENT	1 6 8

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1304FR31-2	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J



1. GENERAL INFORMATION

Applicant: LG Electronics MobileComm U.S.A., Inc.
Address: 1000 Sylvan Avenue, Englewood Cliffs NJ 07632
FCC ID: ZNFE450J
EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n
Model name(s): LG-E450j
Additional Model name(s): LGE450j, E450j
Date(s) of Tests: April 15, 2013 ~ April 17, 2013
Place of Tests: HCT Co., Ltd.
 105-1, Jangam-ri , Majang-Myeon, Icheon-si, Kyunggi-Do, 467-811, KOREA.
 (IC Recognition No. : 5944A-3)

2. EUT DESCRIPTION

EUT Type	GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	
FCC Model Name	LG-E450j	
Additional FCC Model Name	LGE450j, E450j	
Power Supply	DC 3.8 V	
Battery type	Li-ion Battery(Standard)	
Frequency Range	TX: 2412 MHz ~ 2462 MHz, 2422 MHz - 2452 MHz_40 MHz BW RX: 2412 MHz ~ 2462 MHz, 2422 MHz - 2452 MHz_40 MHz BW	
Max. RF Output Power	Peak	Wi-Fi 802.11b(20.37 dBm) / Wi-Fi 802.11g (18.89 dBm) / Wi-Fi 802.11n_20 MHz (17.83 dBm) / Wi-Fi 802.11n_40 MHz (18.37 dBm)
	Average	Wi-Fi 802.11b(13.77 dBm) / Wi-Fi 802.11g (10.17 dBm) / Wi-Fi 802.11n_20 MHz (9.14 dBm) / Wi-Fi 802.11n_40 MHz (10.00 dBm)
Modulation Type	DSSS/CCK(802.11b), OFDM(802.11g, 802.11n)	
Antenna Specification	Manufacturer: acetchnology A Antenna type: Internal Antenna Peak Gain : 0.74 dBi	

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1304FR31-2	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J



3. TEST METHODOLOGY

FCC KDB 558074 D01 DTS Meas Guidance v03 dated April 8, 2013 entitled “Guidance for Performing Compliance Measurements on Digital Transmission Systems(DTS) and the measurement procedure described in the American National Standard for Testing Unlicensed Wireless Devices(ANSI C63.4-2003) Operating Under §15.247” were used in the measurement.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version :2003) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4. (Version: 2003)

Conducted Antenna Terminal

See Section from 9.1 to 9.2.(KDB 558074)

3.4 DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel low, mid and high with highest data rate (worst case) is chosen for full testing.

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1304FR31-2	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J



4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, 467-811, Korea. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2003) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated June 21, 2011 (Registration Number: 90661)

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements. Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1304FR31-2	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J



6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

* The antennas of this E.U.T are permanently attached.

*The E.U.T Complies with the requirement of §15.203

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1304FR31-2	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J

7. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section (s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	CONDUCTED	PASS
Conducted Maximum Peak Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge(Out of Band Emissions)	§15.247(d)	Conducted < 20 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 8.6		PASS
Radiated Spurious Emissions	§15.205, 15.209	cf. Section 8.5.1	RADIATED	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 8.5.2		PASS

8. TEST RESULT


8.1 6dB BANDWIDTH (802.11b/g/n)

Test Requirements and limit, §15.247(a)(2)

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies.

The minimum permissible 6dB bandwidth is 500 kHz.

▣ TEST CONFIGURATION



▣ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Page 5 in KDB 558074, issued 04/09/2013)

RBW = 100 kHz

VBW \geq 3 x RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Allow the trace to stabilize

Note : We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

FCC PT.15.247 TEST REPORT		FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1304FR31-2	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n		FCC ID: ZNFE450J

▣ TEST RESULTS

Conducted 6dB Bandwidth Measurements for 802.11b

802.11b Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	9.558	0.500	Pass
2437	6	9.490	0.500	Pass
2462	11	10.040	0.500	Pass

Conducted 6dB Bandwidth Measurements for 802.11g

802.11g Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	16.440	0.500	Pass
2437	6	16.490	0.500	Pass
2462	11	16.440	0.500	Pass

Conducted 6dB Bandwidth Measurements for 802.11n_20 MHz BW

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2412	1	17.650	0.500	Pass
2437	6	17.650	0.500	Pass
2462	11	17.660	0.500	Pass

Conducted 6dB Bandwidth Measurements for 802.11n_40 MHz BW


802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
Frequency [MHz]	Channel No.			
2422	3	35.200	0.500	Pass
2437	6	35.170	0.500	Pass
2452	9	35.210	0.500	Pass

▣ RESULT PLOTS

6dB Bandwidth plot (802.11b-CH 1)




6dB Bandwidth plot (802.11b-CH 6)

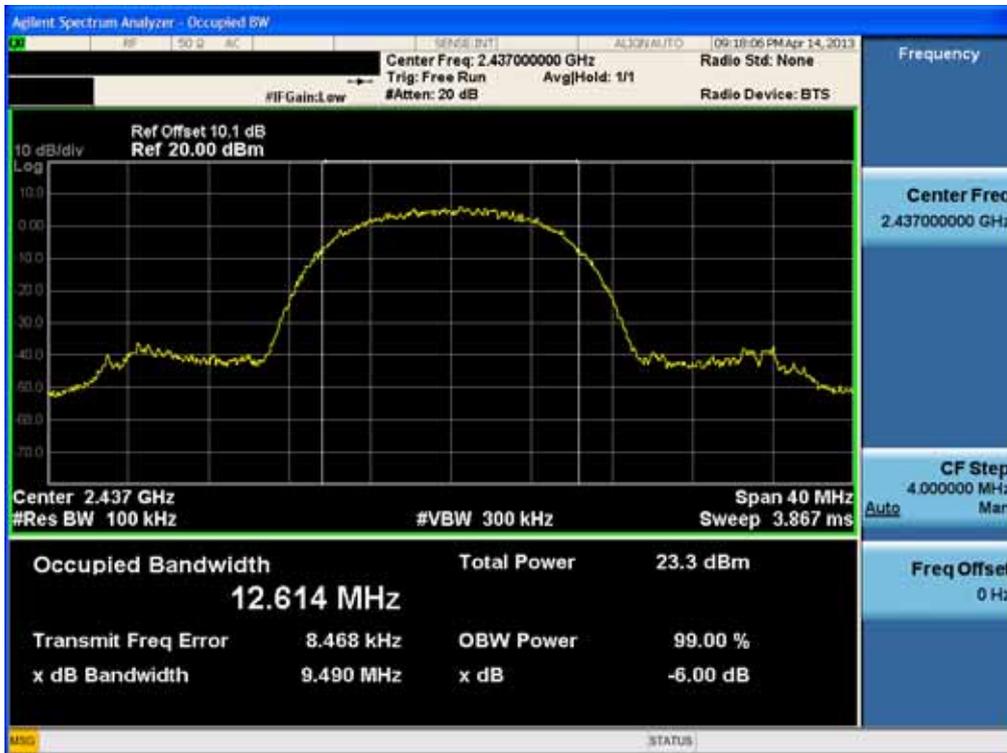


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1304FR31-2	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J


6dB Bandwidth plot (802.11b-CH 11)

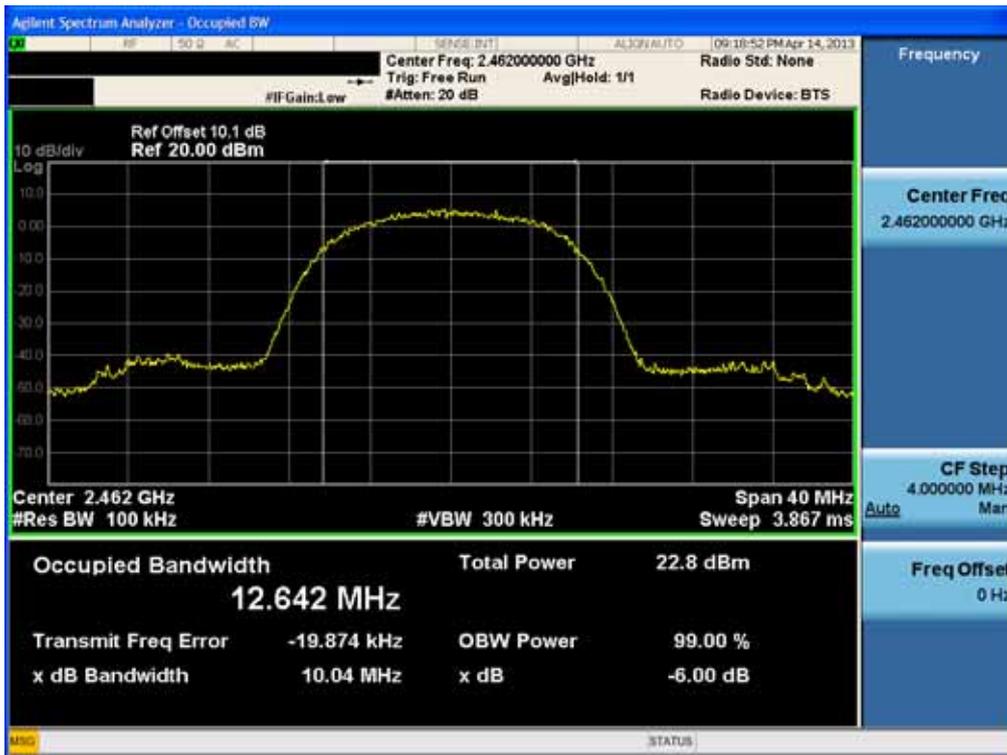


6dB Bandwidth plot (802.11g-CH 1)

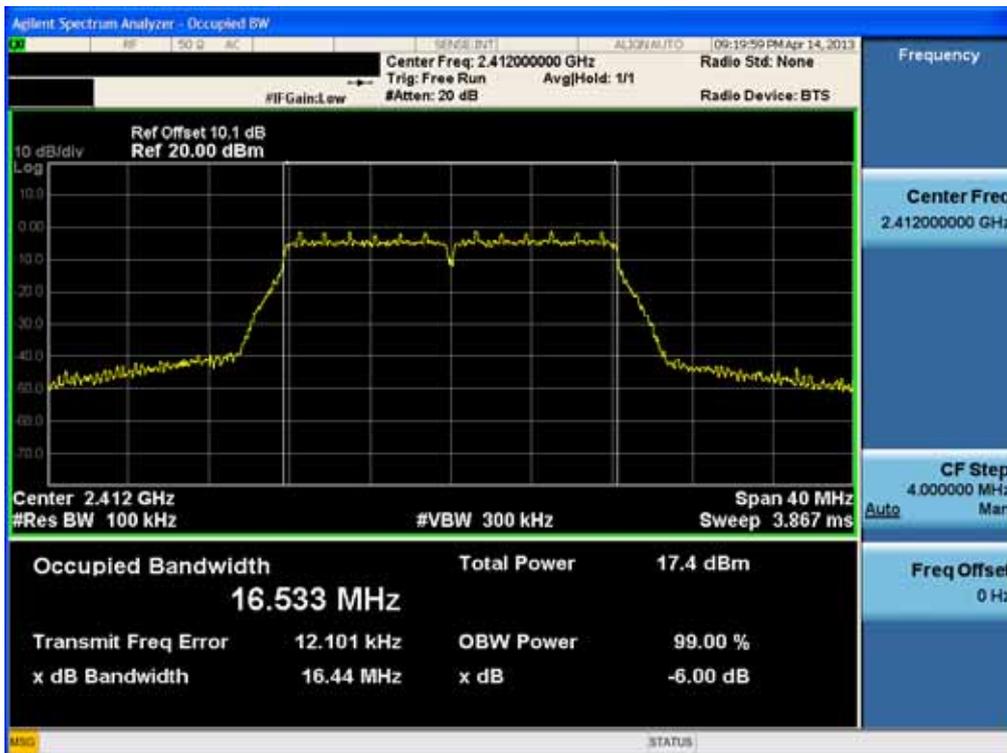

6dB Bandwidth plot (802.11g-CH 6)

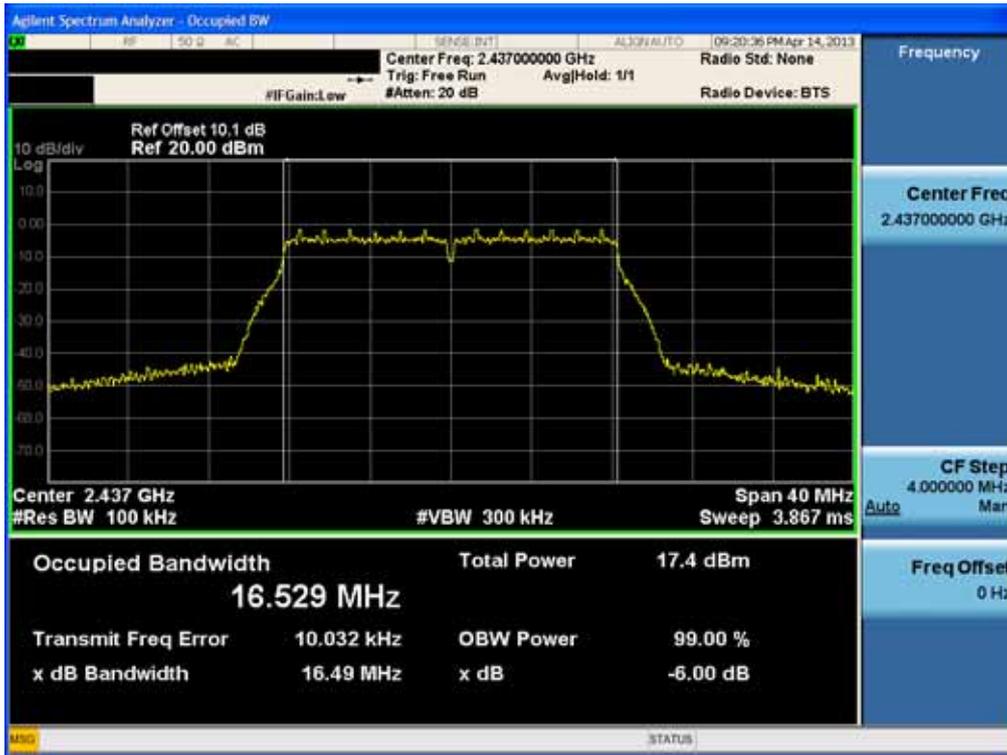


6dB Bandwidth plot (802.11g-CH 11)

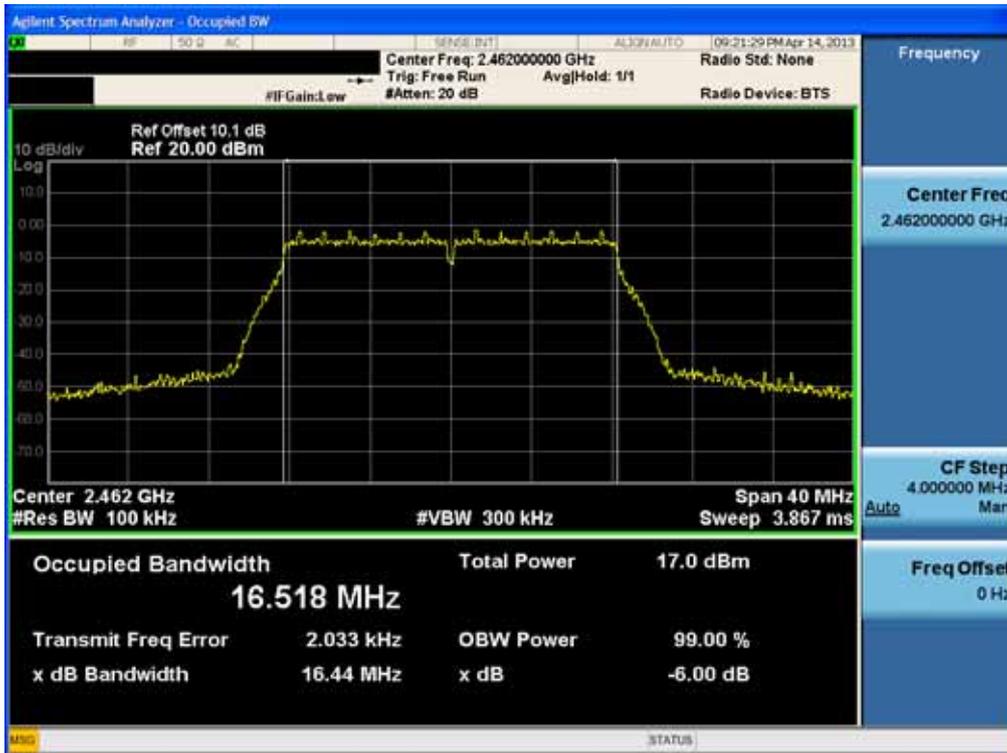


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1304FR31-2	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J


6dB Bandwidth plot (802.11n-CH 1) _20 MHz BW

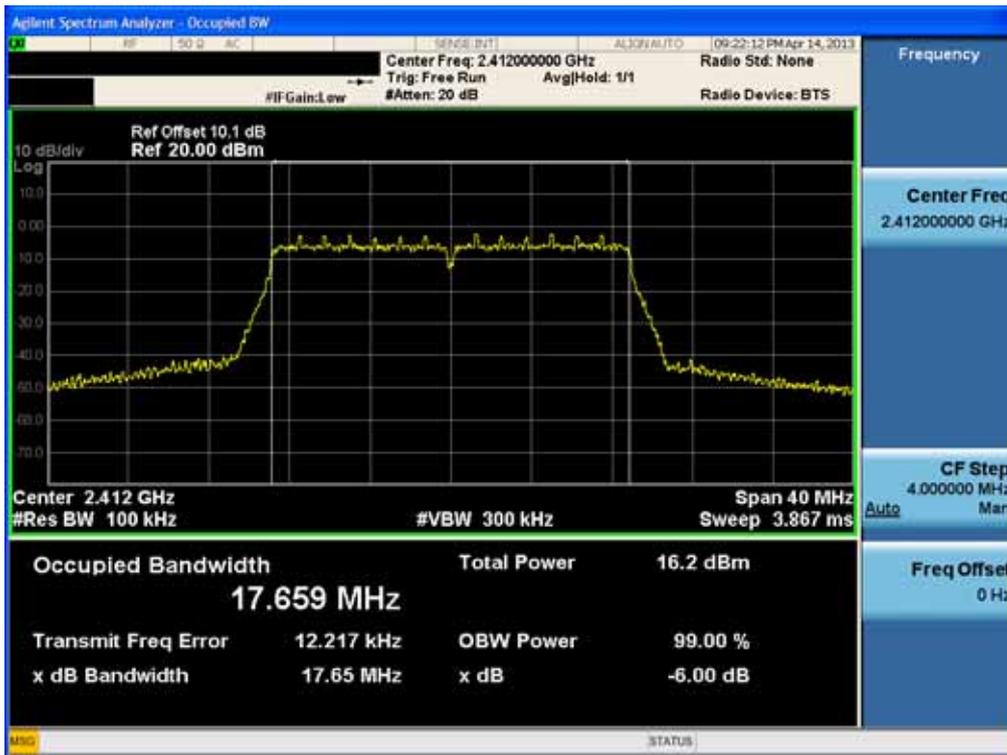

6dB Bandwidth plot (802.11n-CH 6) _20 MHz BW

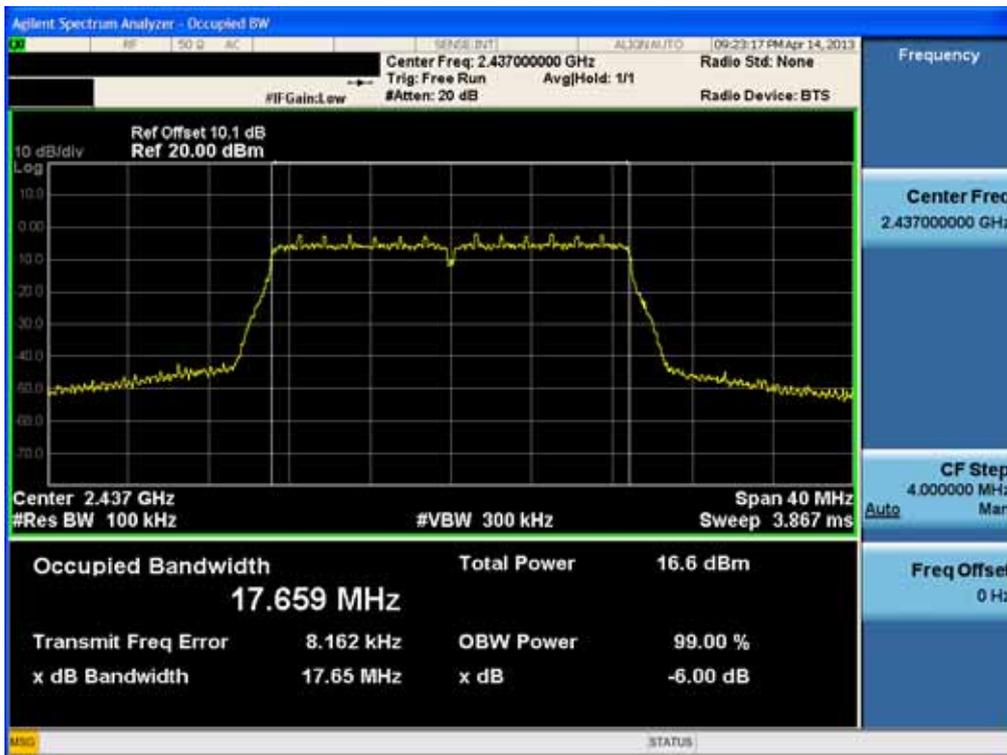


6dB Bandwidth plot (802.11n-CH 11) _20 MHz BW

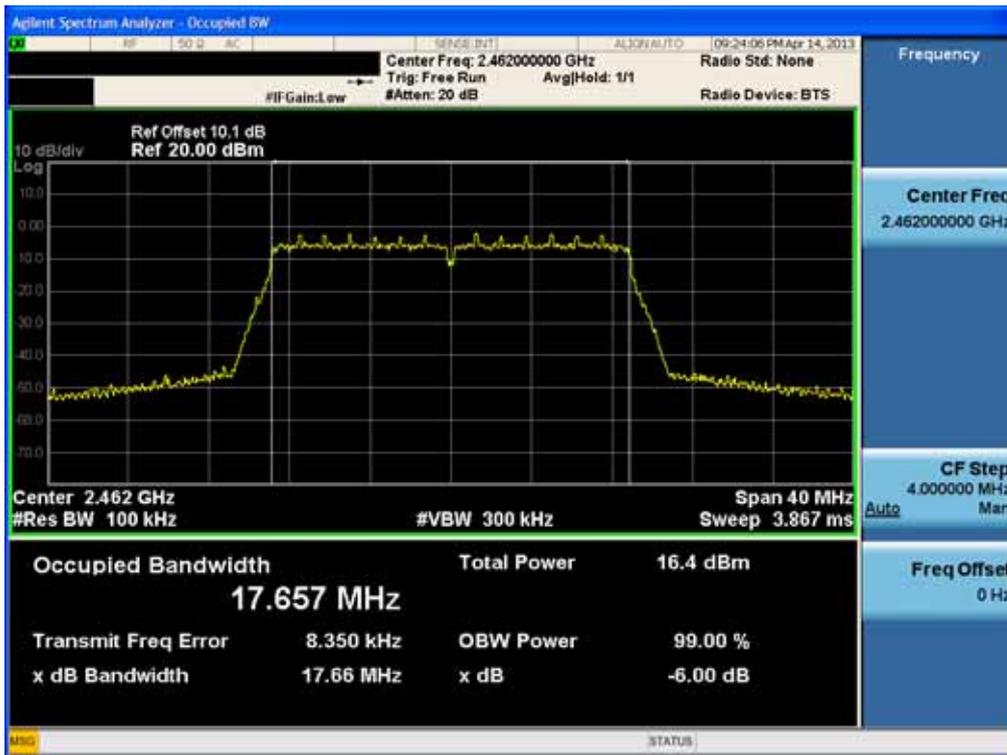


6dB Bandwidth plot (802.11n-CH 3) _40 MHz BW



6dB Bandwidth plot (802.11n-CH 6) _40 MHz BW

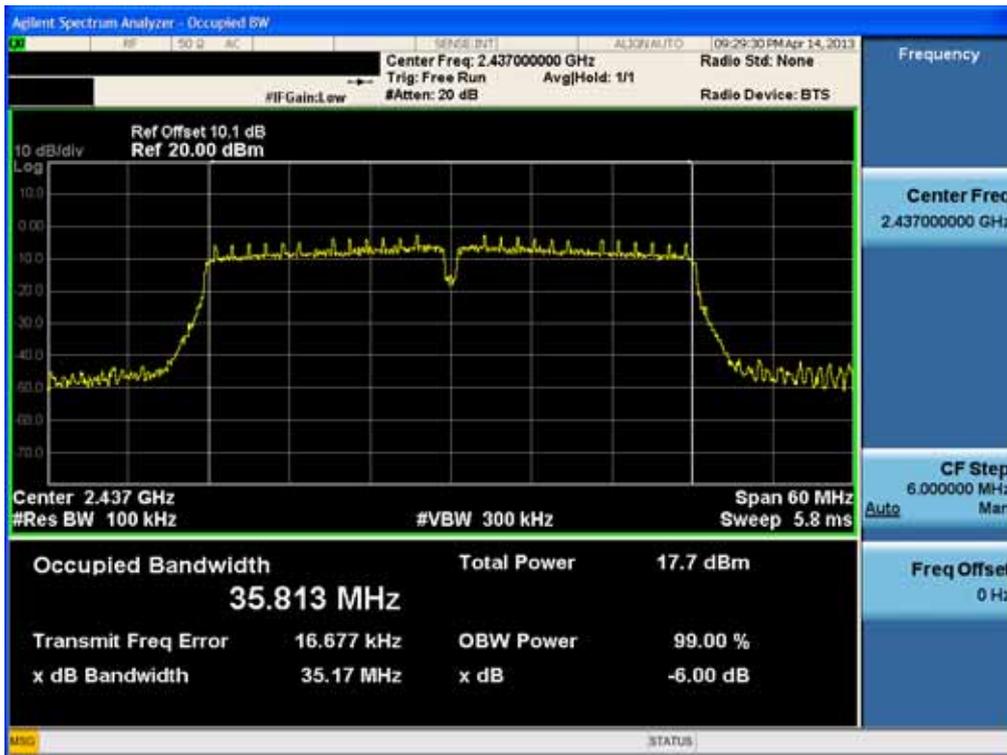

6dB Bandwidth plot (802.11n-CH 9) _40 MHz BW

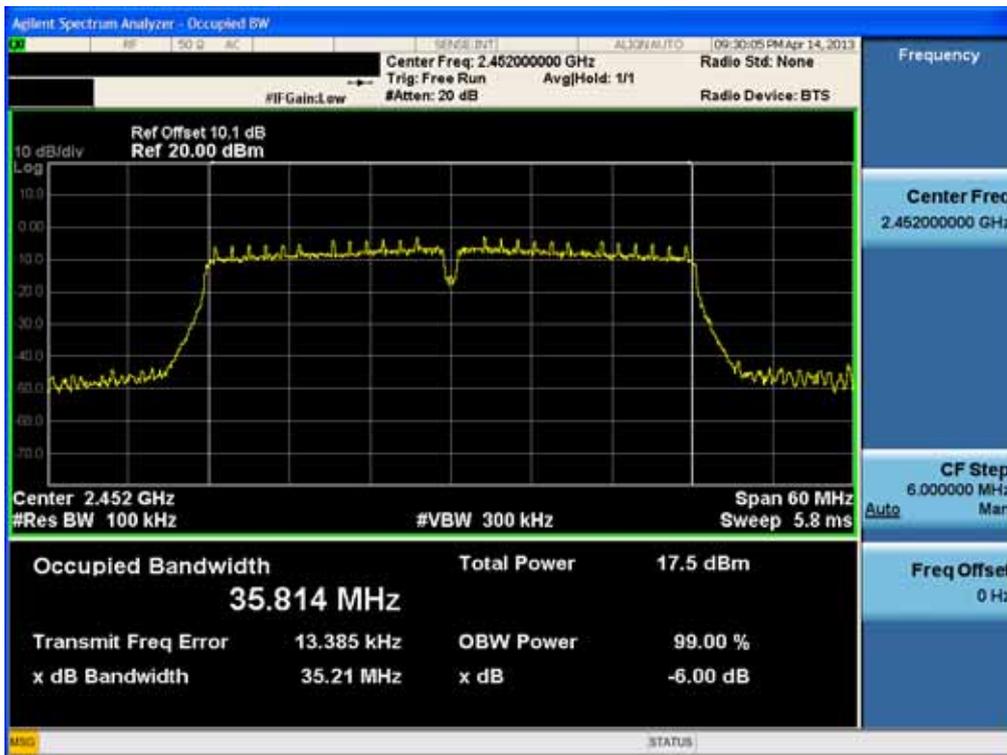


8.2 OUTPUT POWER (802.11b/g/n)

Test Requirements and limit, §15.247(b)(3)

A transmitter antenna terminal of EUT is connected to the input of a Spectrum Analyzer. Measurement is made while the EUT is operating in transmission mode at the appropriate frequencies.

The maximum permissible conducted output power is 1 Watt.

▣ TEST CONFIGURATION



▣ TEST PROCEDURE

The transmitter output is connected to the Spectrum Analyzer. We use the spectrum analyzer's integrated band power measurement function.

The Spectrum Analyzer is set to

- Peak Power (Procedure 9.1.2 in KDB 558074, issued 04/09/2013)

RBW = 1 MHz

VBW $\geq 3 \times$ RBW

SPAN $\geq 1.5 \times$ DTS bandwidth

Detector Mode = Peak

Sweep = auto couple

Trace Mode = max hold

Allow trace to fully stabilize.

Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select peak detector).

- Average Power (Procedure 9.2.2.4 in KDB 558074, issued 04/09/2013)

Measure the duty cycle

Set span to at least 1.5 times the OBW

RBW = 1-5 % of the OBW, not to exceed 1 MHz.

VBW $\geq 3 \times$ RBW.

Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)

Sweep time = auto.

Detector = RMS(i.e., power averaging)

Do not use sweep triggering. Allow the sweep to "free run".

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1304FR31-2	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J

Trace average at least 100 traces in power averaging(RMS) mode.

Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges.

Add 10 log (1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

▣ **Sample Calculation**

$$\begin{aligned} \text{Output Power} &= \text{Reading Value} + \text{ATT loss} + \text{Cable loss}(1 \text{ ea}) + \text{Duty Cycle Factor} \\ &= 10 \text{ dBm} + 10 \text{ dB} + 0.8 \text{ dB} + 0.2 \text{ dB} = 21.0 \text{ dBm} \end{aligned}$$

Note :

1. Spectrum reading values are not plot data. The power results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB. Actual value of loss for the attenuator and cable combination is below table.

So, 10.1 dB is offset. And the offset gap in the 2.4 GHz range do not affect the conducted peak power final result.

Band	Frequency(MHz)	Loss(dB)
2.4 GHz	2412	10.11
	2437	10.10
	2462	10.12

(Actual value of loss for the attenuator and cable combination)

▣ Duty Cycle Factor

Mode	Data Rate	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
b	1 Mbps	12.180	12.290	0.99104963	0.039
	2 Mbps	6.190	6.290	0.98410175	0.070
	5.5 Mbps	2.375	2.475	0.95959596	0.179
	11 Mbps	1.281	1.386	0.92424242	0.342
g	6 Mbs	2.016	2.133	0.94514768	0.245
	9 Mbs	1.350	1.464	0.92213115	0.352
	12 Mbs	1.016	1.132	0.89752650	0.470
	18 Mbs	0.680	0.797	0.85319950	0.689
	24 Mbs	0.516	0.632	0.81645570	0.881
	36 Mbs	0.347	0.464	0.74784483	1.262
	48 Mbs	0.272	0.380	0.71578947	1.452
	54 Mbs	0.244	0.353	0.69121813	1.604
n_20 MHz BW	6.5 Mbs	1.887	1.995	0.94586466	0.242
	13 Mbs	0.964	1.072	0.89925373	0.461
	19.5 Mbs	0.654	0.763	0.85714286	0.669
	26 Mbs	0.500	0.608	0.82236842	0.849
	39 Mbs	0.348	0.456	0.76315789	1.174
	52 Mbs	0.268	0.376	0.71276596	1.471
	58.5 Mbs	0.244	0.352	0.69318182	1.592
	65 Mbs	0.224	0.332	0.67469880	1.709
n_40 MHz BW	13.5 Mbps	0.648	0.755	0.85827815	0.664
	27 Mbps	0.344	0.451	0.76274945	1.176
	40.5 Mbps	0.240	0.347	0.69164265	1.601
	54 Mbps	0.192	0.299	0.64214047	1.924
	81 Mbps	0.140	0.247	0.56680162	2.466
	108 Mbps	0.115	0.223	0.51569507	2.876
	121.5 Mbps	0.103	0.210	0.49047619	3.094
	135 Mbps	0.090	0.207	0.43478261	3.617

Note : Duty Cycle Factor = $10 \cdot \log(1/\text{Duty Cycle})$. where, Duty Cycle = T_{on} / T_{total}

▣ TEST RESULTS-Peak

Conducted Output Power Measurements (802.11b Mode)

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	1 Mbps	16.59	30
		2 Mbps	17.54	30
		5.5 Mbps	18.67	30
		11 Mbps	20.23	30
2437	6	1 Mbps	17.21	30
		2 Mbps	18.02	30
		5.5 Mbps	18.68	30
		11 Mbps	20.37	30
2462	11	1 Mbps	16.40	30
		2 Mbps	16.86	30
		5.5 Mbps	18.42	30
		11 Mbps	19.73	30

Conducted Output Power Measurements (802.11g Mode)

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	6 Mbps	17.05	30
		9 Mbps	17.27	30
		12 Mbps	17.40	30
		18 Mbps	17.51	30
		24 Mbps	18.04	30
		36 Mbps	18.15	30
		48 Mbps	18.32	30
		54 Mbps	18.41	30
2437	6	6 Mbps	17.14	30
		9 Mbps	17.82	30
		12 Mbps	17.95	30
		18 Mbps	18.05	30
		24 Mbps	18.44	30
		36 Mbps	18.56	30
		48 Mbps	18.84	30
		54 Mbps	18.89	30
2462	11	6 Mbps	17.23	30
		9 Mbps	17.83	30
		12 Mbps	17.94	30
		18 Mbps	17.73	30
		24 Mbps	18.39	30
		36 Mbps	18.45	30
		48 Mbps	18.67	30
		54 Mbps	18.62	30

Conducted Output Power Measurements (802.11n Mode)_20 MHz BW

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	6.5 Mbps	16.18	30
		13 Mbps	16.35	30
		19.5 Mbps	16.47	30
		26 Mbps	16.84	30
		39 Mbps	16.95	30
		52 Mbps	17.10	30
		58.5 Mbps	17.17	30
		65 Mbps	17.25	30
2437	6	6.5 Mbps	16.76	30
		13 Mbps	16.93	30
		19.5 Mbps	16.65	30
		26 Mbps	17.46	30
		39 Mbps	17.53	30
		52 Mbps	17.65	30
		58.5 Mbps	17.76	30
		65 Mbps	17.83	30
2462	11	6.5 Mbps	16.26	30
		13 Mbps	16.93	30
		19.5 Mbps	17.03	30
		26 Mbps	17.45	30
		39 Mbps	17.54	30
		52 Mbps	17.65	30
		58.5 Mbps	17.75	30
		65 Mbps	17.83	30

▣ TEST RESULTS

Conducted Output Power Measurements (802.11n Mode)_40 MHz BW

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2422	3	13.5 Mbps	17.07	30
		27 Mbps	17.32	30
		40.5 Mbps	17.57	30
		54 Mbps	17.88	30
		81 Mbps	18.06	30
		108 Mbps	18.15	30
		121.5 Mbps	18.25	30
		135 Mbps	18.27	30
2437	6	13.5 Mbps	16.90	30
		27 Mbps	17.42	30
		40.5 Mbps	17.58	30
		54 Mbps	17.66	30
		81 Mbps	17.77	30
		108 Mbps	17.85	30
		121.5 Mbps	18.30	30
		135 Mbps	18.37	30
2452	9	13.5 Mbps	17.10	30
		27 Mbps	17.37	30
		40.5 Mbps	17.45	30
		54 Mbps	17.51	30
		81 Mbps	17.56	30
		108 Mbps	17.87	30
		121.5 Mbps	17.72	30
		135 Mbps	18.12	30

▣ TEST RESULTS-Average

Conducted Output Power Measurements (802.11b Mode)

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	1 Mbps	13.72	0.04	13.76	30
		2 Mbps	13.64	0.07	13.71	30
		5.5 Mbps	13.23	0.18	13.41	30
		11 Mbps	13.43	0.34	13.77	30
2437	6	1 Mbps	13.53	0.04	13.57	30
		2 Mbps	13.40	0.07	13.47	30
		5.5 Mbps	13.38	0.18	13.56	30
		11 Mbps	13.21	0.34	13.55	30
2462	11	1 Mbps	13.37	0.04	13.41	30
		2 Mbps	13.46	0.07	13.53	30
		5.5 Mbps	13.51	0.18	13.69	30
		11 Mbps	13.41	0.34	13.75	30

Conducted Output Power Measurements (802.11g Mode)

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	6 Mbps	8.84	0.25	9.09	30
		9 Mbps	8.90	0.35	9.25	30
		12 Mbps	8.92	0.47	9.39	30
		18 Mbps	8.66	0.69	9.35	30
		24 Mbps	8.52	0.88	9.40	30
		36 Mbps	8.27	1.26	9.53	30
		48 Mbps	8.09	1.45	9.54	30
		54 Mbps	7.96	1.60	9.56	30
2437	6	6 Mbps	9.56	0.25	9.81	30
		9 Mbps	9.51	0.35	9.86	30
		12 Mbps	9.45	0.47	9.92	30
		18 Mbps	9.23	0.69	9.92	30
		24 Mbps	9.13	0.88	10.01	30
		36 Mbps	8.76	1.26	10.02	30
		48 Mbps	8.24	1.45	9.69	30
		54 Mbps	8.57	1.60	10.17	30
2462	11	6 Mbps	9.72	0.25	9.97	30
		9 Mbps	9.57	0.35	9.92	30
		12 Mbps	9.57	0.47	10.04	30
		18 Mbps	9.31	0.69	10.00	30
		24 Mbps	8.72	0.88	9.60	30
		36 Mbps	8.47	1.26	9.73	30
		48 Mbps	8.25	1.45	9.70	30
		54 Mbps	8.57	1.60	10.17	30

Conducted Output Power Measurements (802.11n Mode) _20 MHz BW

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	6.5 Mbps	7.85	0.24	8.09	30
		13 Mbps	7.85	0.46	8.31	30
		19.5 Mbps	7.75	0.67	8.42	30
		26 Mbps	7.55	0.85	8.40	30
		39 Mbps	7.25	1.17	8.42	30
		52 Mbps	6.91	1.47	8.38	30
		58.5 Mbps	6.89	1.59	8.48	30
		65 Mbps	6.85	1.71	8.56	30
2437	6	6.5 Mbps	7.90	0.24	8.14	30
		13 Mbps	8.29	0.46	8.75	30
		19.5 Mbps	8.21	0.67	8.88	30
		26 Mbps	7.50	0.85	8.35	30
		39 Mbps	7.78	1.17	8.95	30
		52 Mbps	7.54	1.47	9.01	30
		58.5 Mbps	7.41	1.59	9.00	30
		65 Mbps	7.36	1.71	9.07	30
2462	11	6.5 Mbps	8.05	0.24	8.29	30
		13 Mbps	8.45	0.46	8.91	30
		19.5 Mbps	8.31	0.67	8.98	30
		26 Mbps	8.13	0.85	8.98	30
		39 Mbps	7.41	1.17	8.58	30
		52 Mbps	7.67	1.47	9.14	30
		58.5 Mbps	7.48	1.59	9.07	30
		65 Mbps	6.96	1.71	8.67	30

▣ TEST RESULTS

Conducted Output Power Measurements (802.11n Mode)_40 MHz BW

802.11n Mode		Rate (Mbps)	Measured Power(dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2422	3	13.5 Mbps	8.28	0.66	8.94	30
		27 Mbps	8.01	1.18	9.19	30
		40.5 Mbps	7.67	1.60	9.27	30
		54 Mbps	7.43	1.92	9.35	30
		81 Mbps	6.93	2.47	9.40	30
		108 Mbps	6.57	2.88	9.45	30
		121.5 Mbps	6.43	3.09	9.52	30
		135 Mbps	6.38	3.62	10.00	30
2437	6	13.5 Mbps	8.18	0.66	8.84	30
		27 Mbps	8.34	1.18	9.52	30
		40.5 Mbps	7.51	1.60	9.11	30
		54 Mbps	7.73	1.92	9.65	30
		81 Mbps	6.73	2.47	9.20	30
		108 Mbps	6.37	2.88	9.25	30
		121.5 Mbps	6.21	3.09	9.30	30
		135 Mbps	6.13	3.62	9.75	30
2452	9	13.5 Mbps	7.88	0.66	8.54	30
		27 Mbps	7.53	1.18	8.71	30
		40.5 Mbps	7.17	1.60	8.77	30
		54 Mbps	7.36	1.92	9.28	30
		81 Mbps	6.41	2.47	8.88	30
		108 Mbps	6.04	2.88	8.92	30
		121.5 Mbps	5.85	3.09	8.94	30
		135 Mbps	5.85	3.62	9.47	30

▣ RESULT PLOTS-Peak

Conducted Output Power (802.11b-CH 1) 1Mbps




Conducted Output Power (802.11b-CH 1) 2Mbps




FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1304FR31-2	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J

Conducted Output Power (802.11b-CH 1) 5.5Mbps

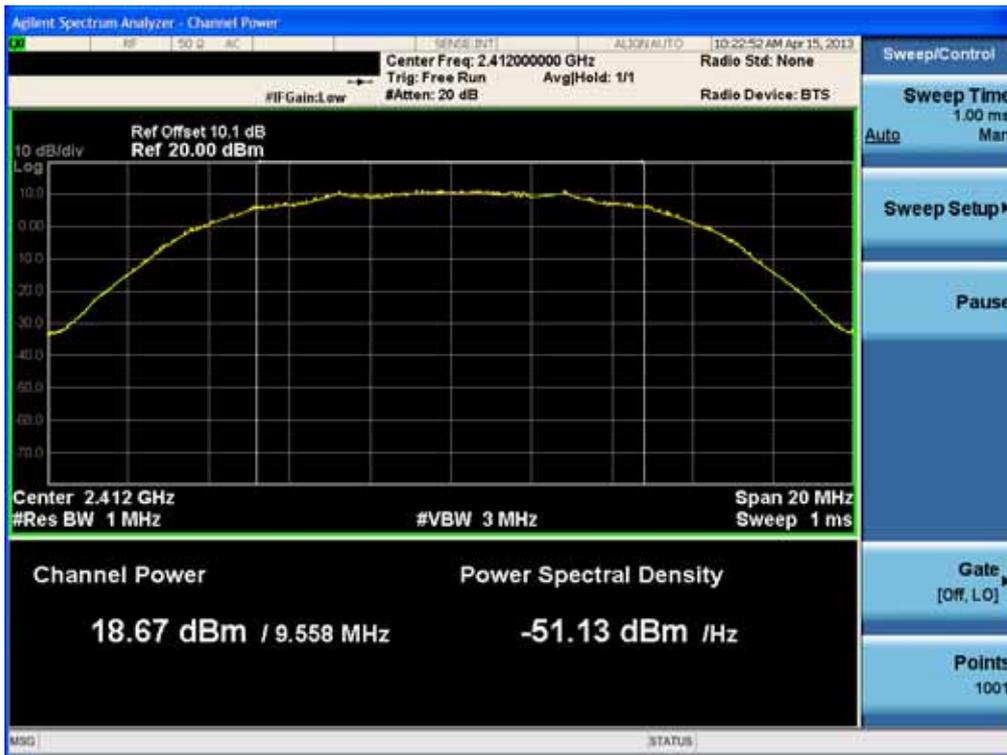

Conducted Output Power (802.11b-CH 1) 11Mbps

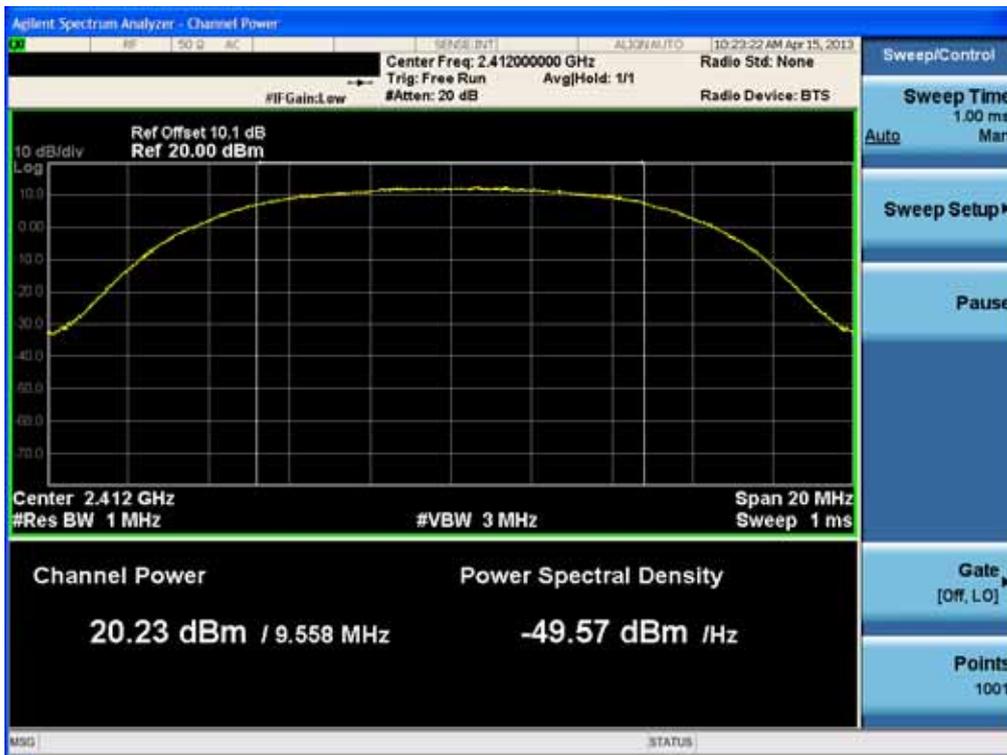

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1304FR31-2	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J

Conducted Output Power (802.11b-CH 6) 1Mbps



Conducted Output Power (802.11b-CH 6) 2Mbps



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1304FR31-2	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J

Conducted Output Power (802.11b-CH 6) 5.5Mbps




Conducted Output Power (802.11b-CH 6) 11Mbps



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1304FR31-2	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J

Conducted Output Power (802.11b-CH 11) 1Mbps

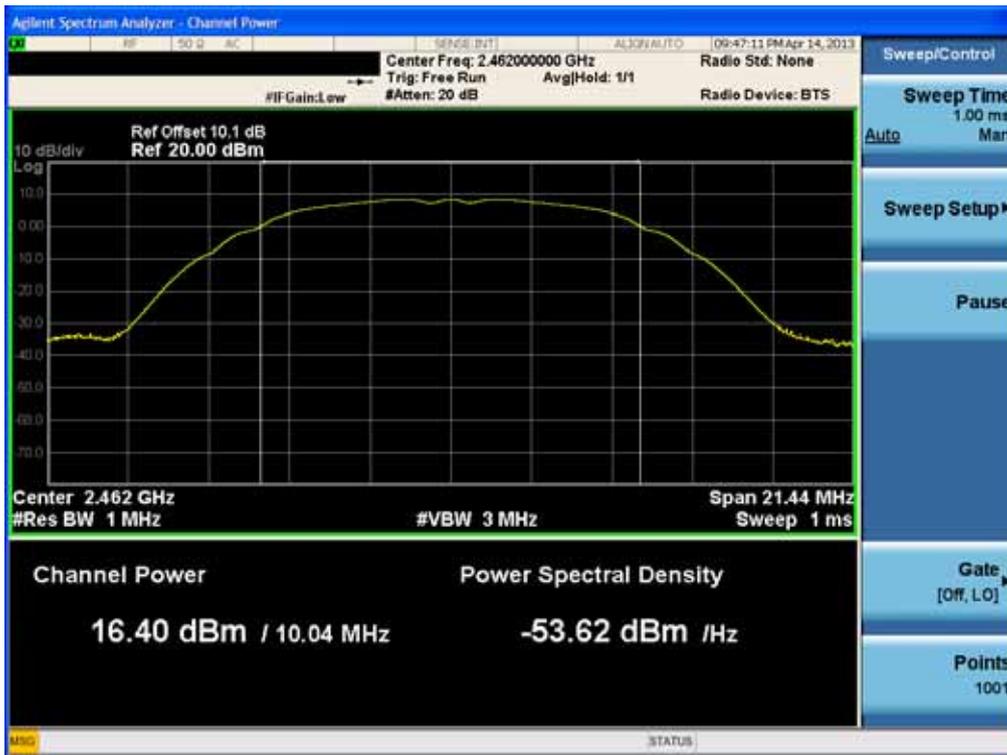


Conducted Output Power (802.11b-CH 11) 2Mbps



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1304FR31-2	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J

Conducted Output Power (802.11b-CH 11) 5.5Mbps

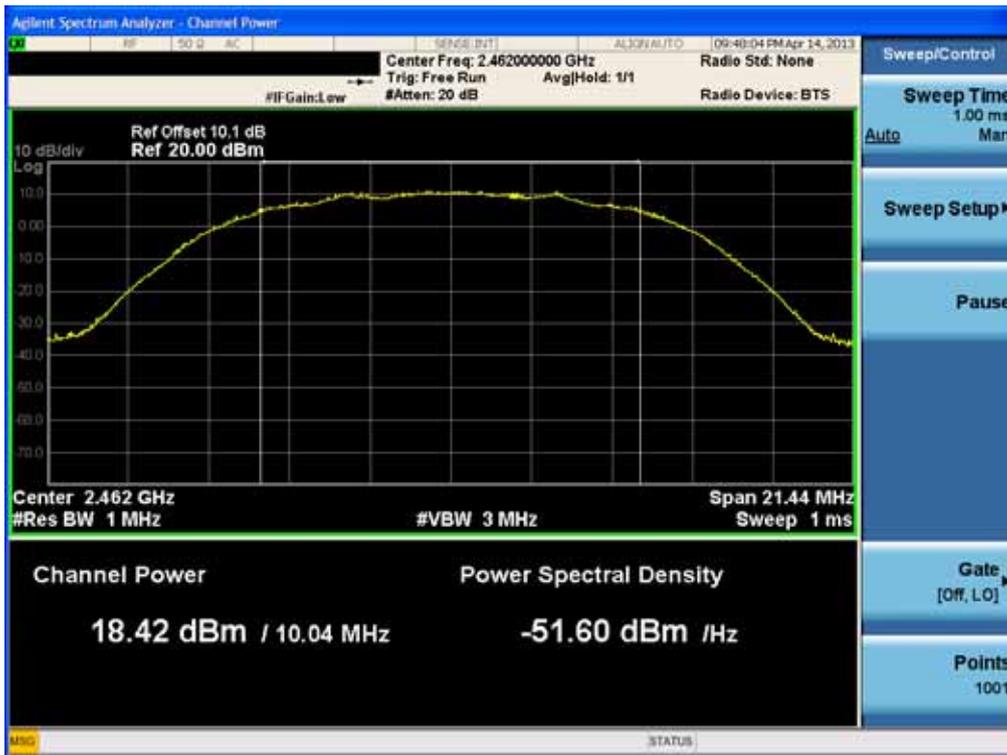

Conducted Output Power (802.11b-CH 11) 11Mbps




FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1304FR31-2	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J

Conducted Output Power (802.11g-CH 1) 6Mbps




Conducted Output Power (802.11g-CH 1) 9Mbps

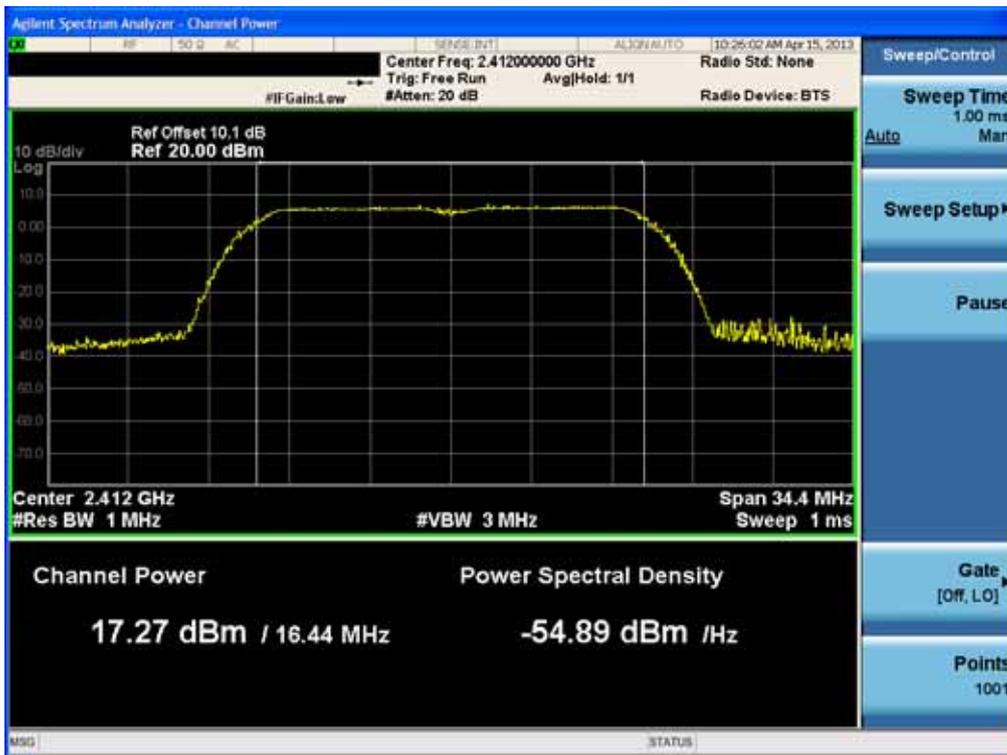

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1304FR31-2	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J

Conducted Output Power (802.11g-CH 1) 12Mbps

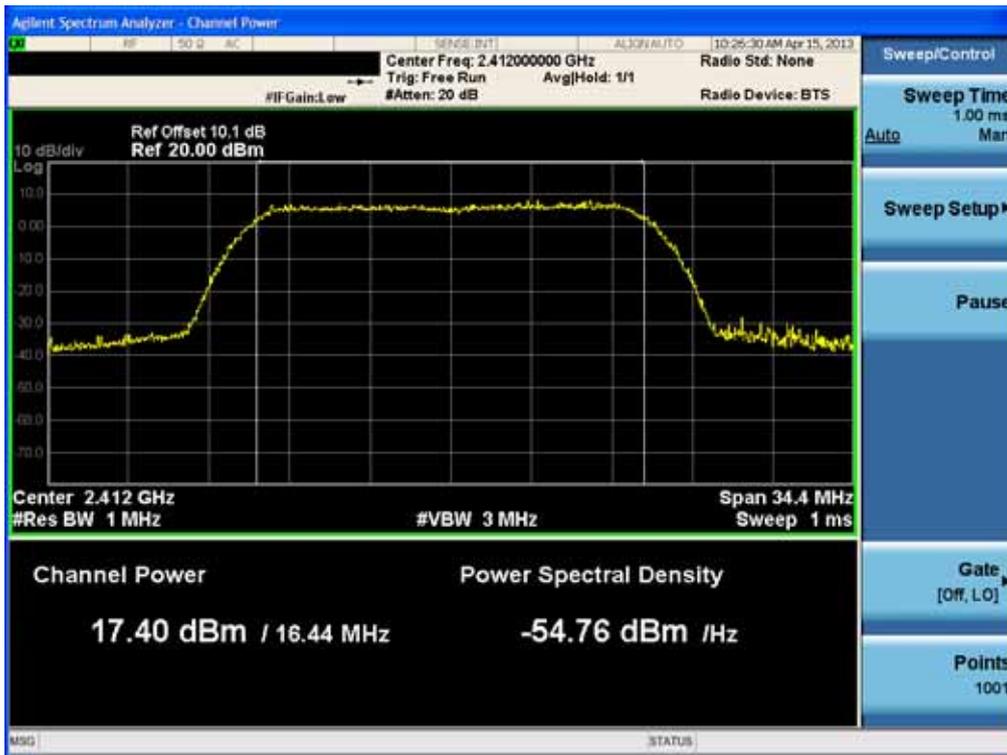


Conducted Output Power (802.11g-CH 1) 18Mbps



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1304FR31-2	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J

Conducted Output Power (802.11g-CH 1) 24Mbps

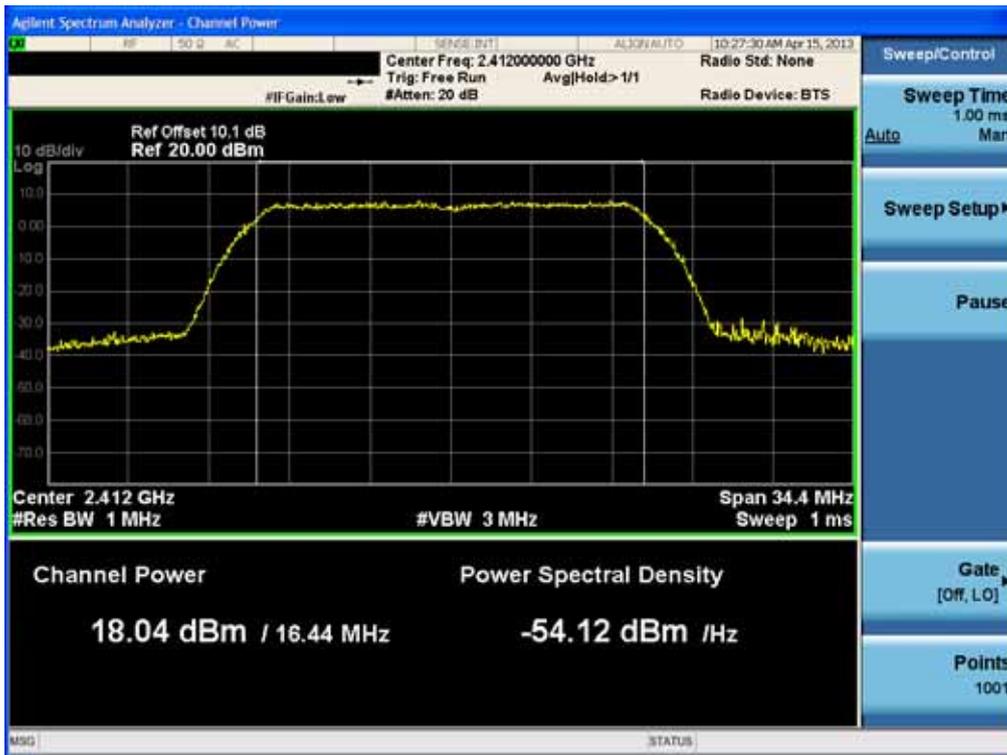


Conducted Output Power (802.11g-CH 1) 36Mbps




FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1304FR31-2	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J

Conducted Output Power (802.11g-CH 1) 48Mbps

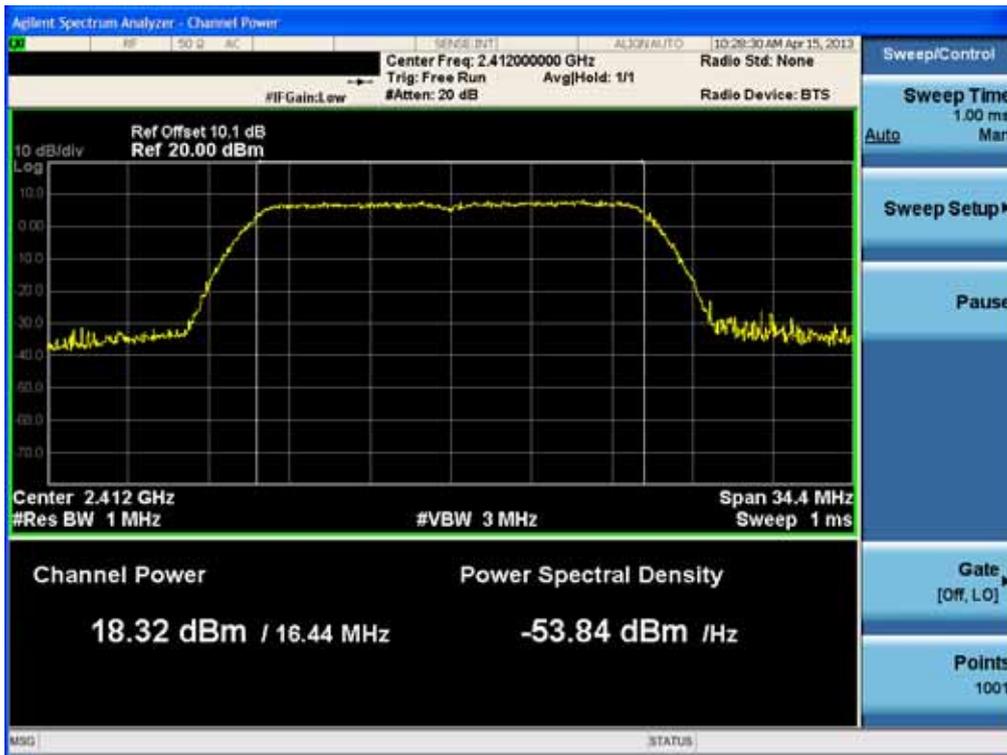


Conducted Output Power (802.11g-CH 1) 54Mbps

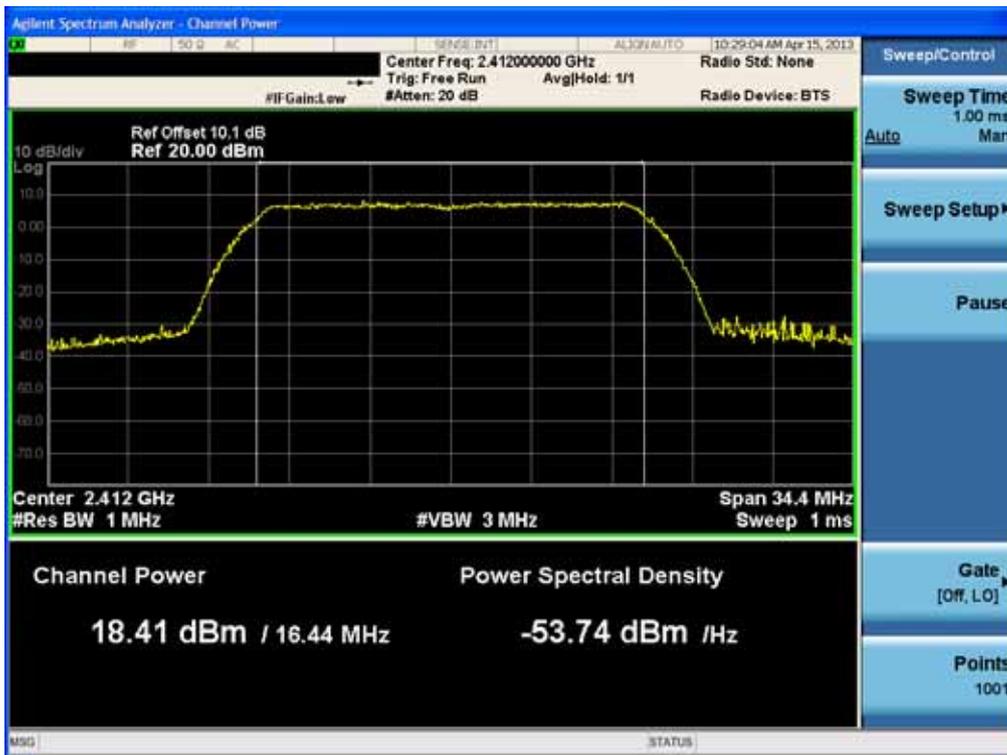


FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1304FR31-2	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J

Conducted Output Power (802.11g-CH 6) 6Mbps

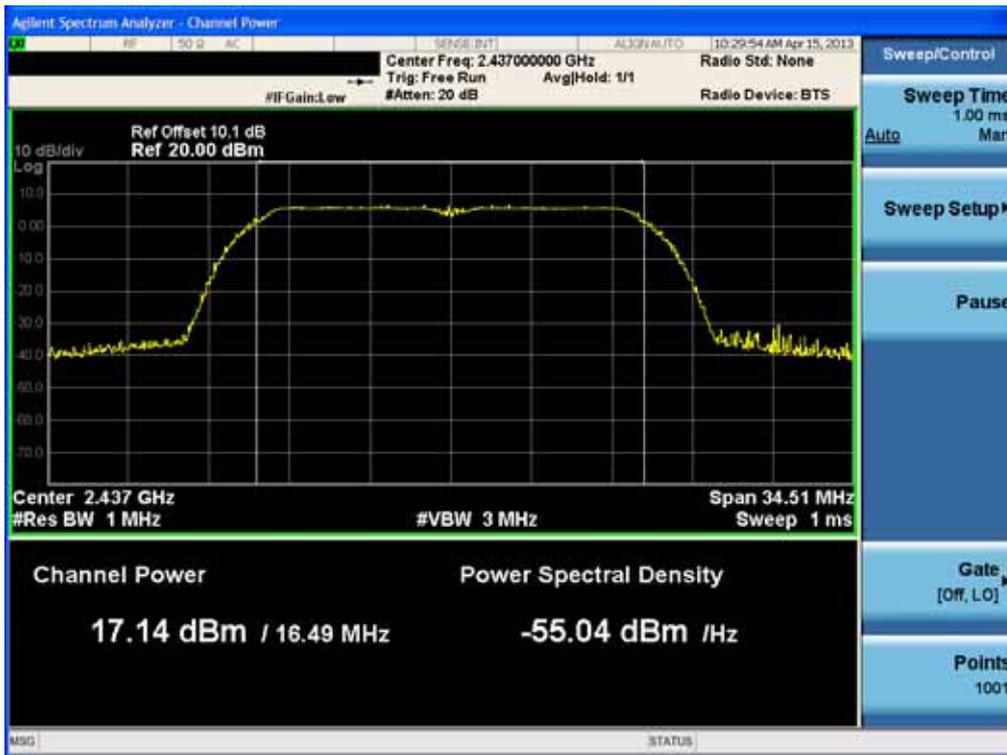

Conducted Output Power (802.11g-CH 6) 9Mbps

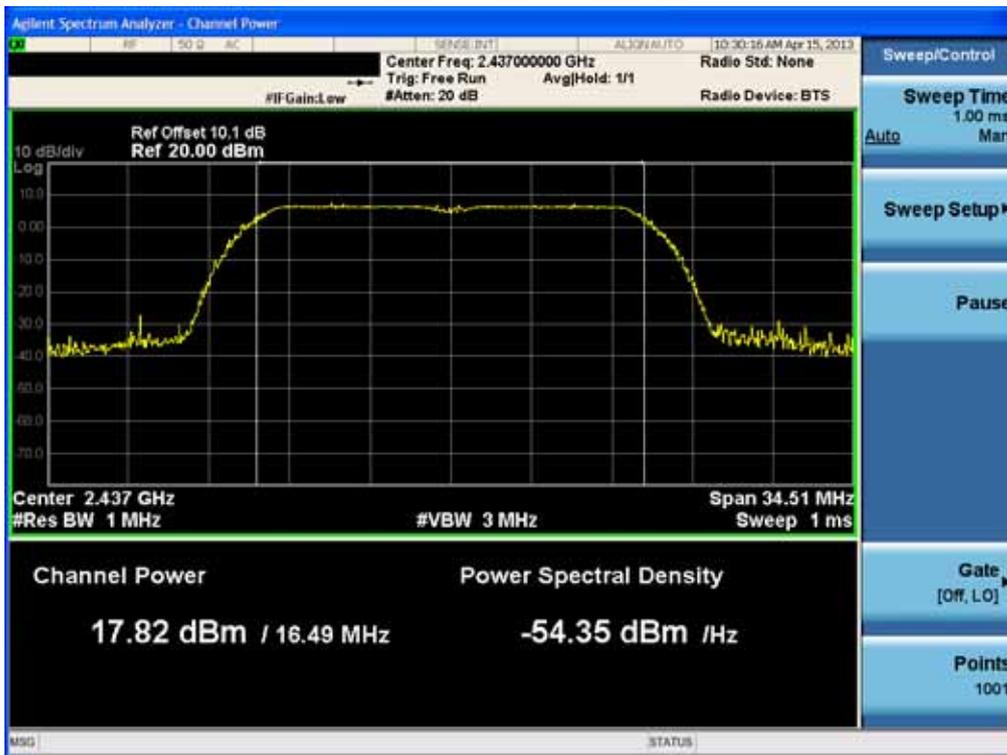

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1304FR31-2	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J

Conducted Output Power (802.11g-CH 6) 12Mbps




Conducted Output Power (802.11g-CH 6) 18Mbps



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1304FR31-2	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J

Conducted Output Power (802.11g-CH 6) 24Mbps

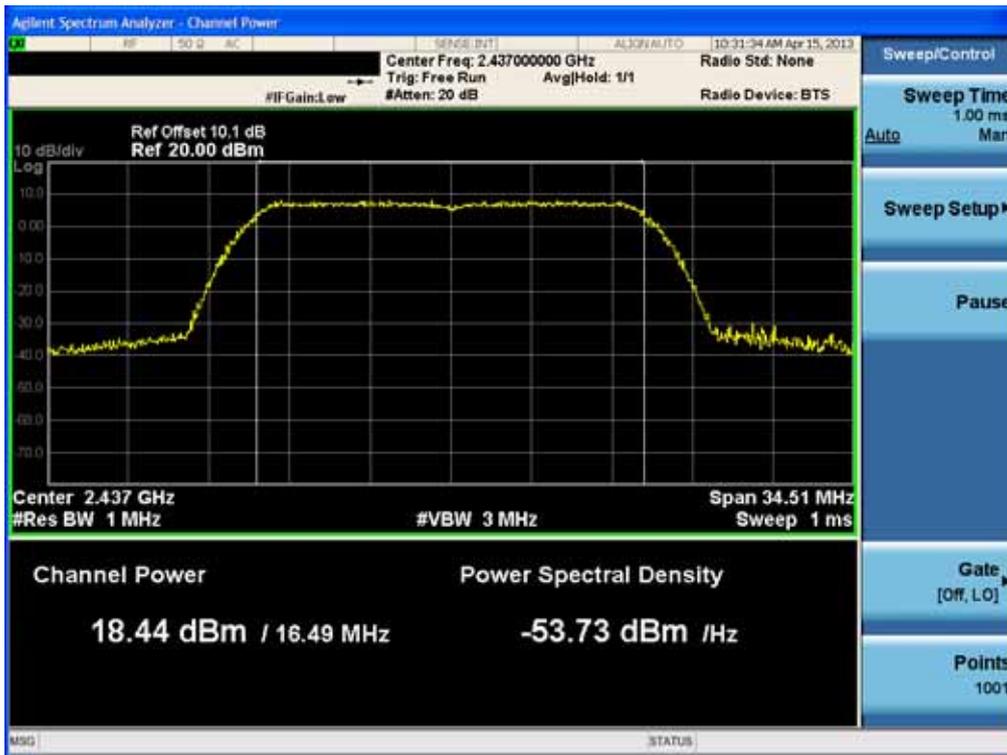


Conducted Output Power (802.11g-CH 6) 36Mbps



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1304FR31-2	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J

Conducted Output Power (802.11g-CH 6) 48Mbps

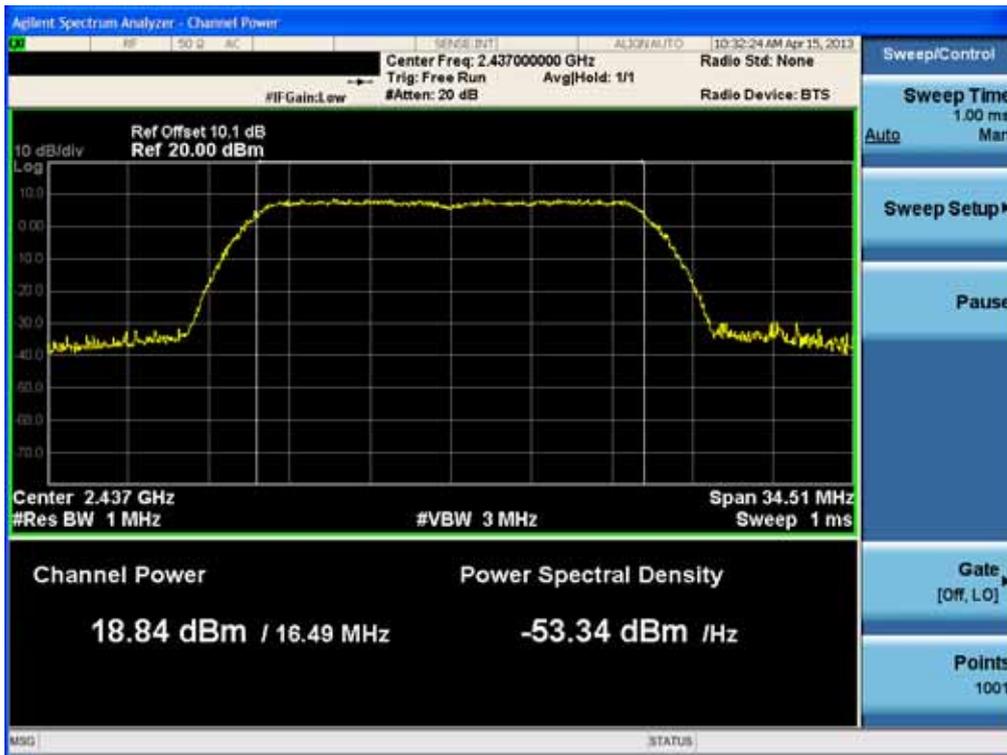

Conducted Output Power (802.11g-CH 6) 54Mbps




FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1304FR31-2	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J

Conducted Output Power (802.11g-CH 11) 6Mbps



Conducted Output Power (802.11g-CH 11) 9Mbps

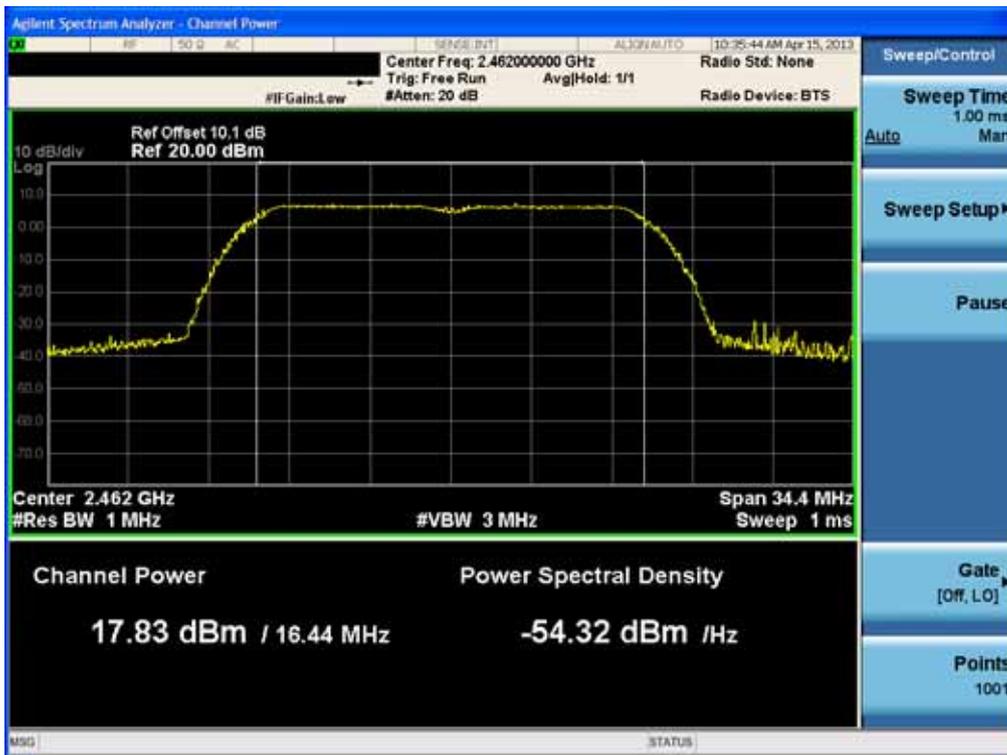

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1304FR31-2	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J

Conducted Output Power (802.11g-CH 11) 12Mbps



Conducted Output Power (802.11g-CH 11) 18Mbps




FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1304FR31-2	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J

Conducted Output Power (802.11g-CH 11) 24Mbps




Conducted Output Power (802.11g-CH 11) 36Mbps

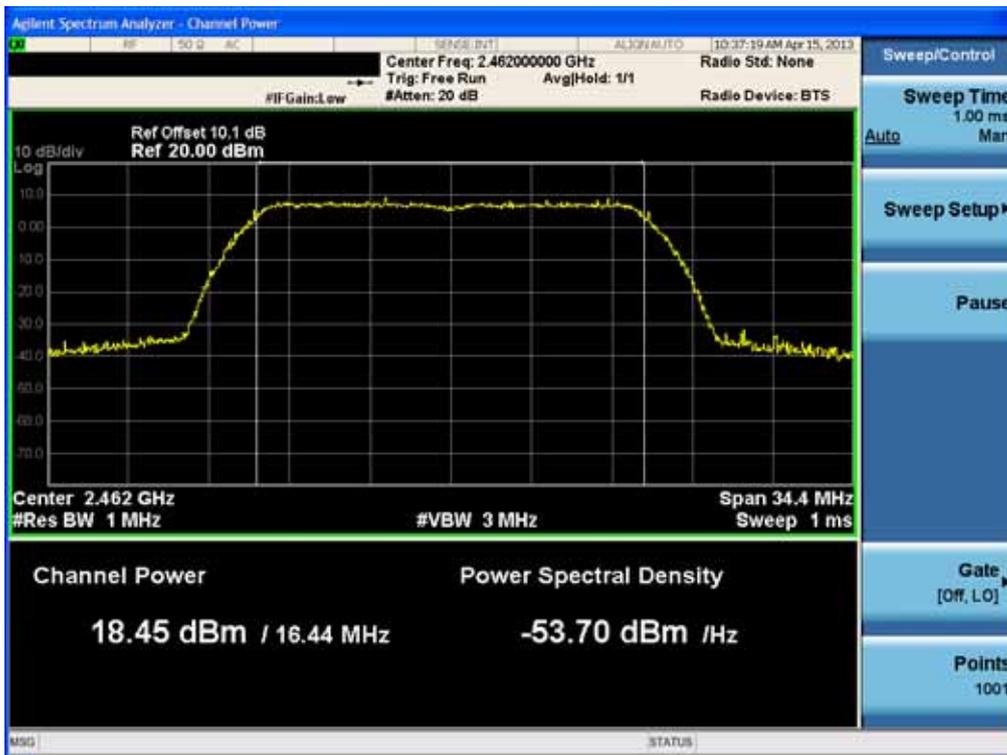

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1304FR31-2	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J

Conducted Output Power (802.11g-CH 11) 48Mbps

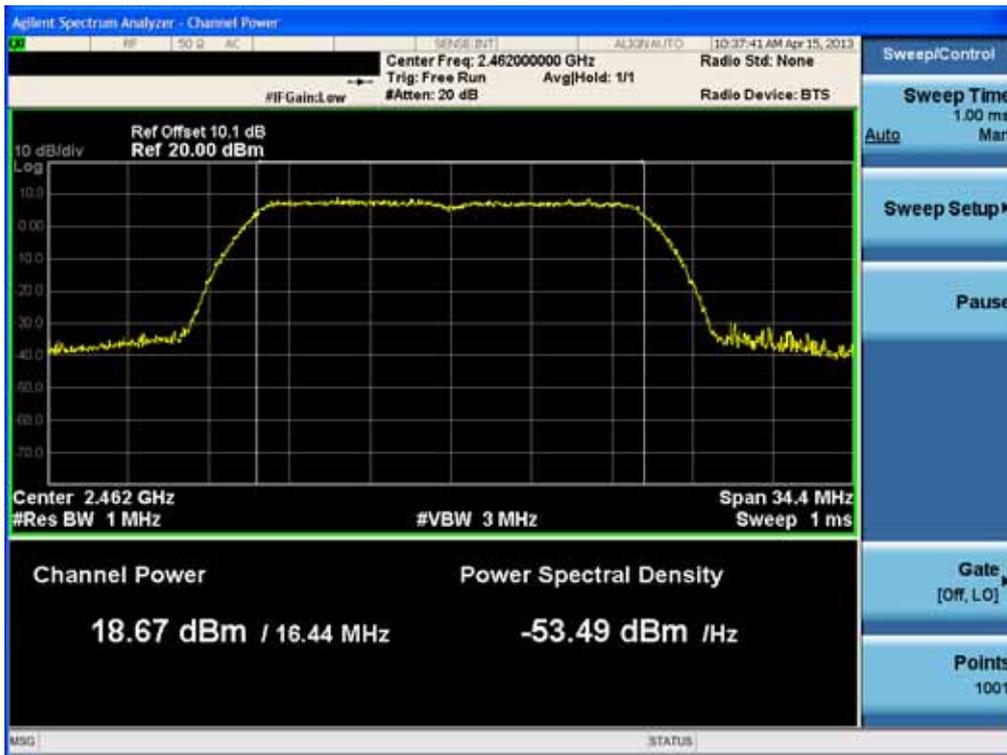


Conducted Output Power (802.11g-CH 11) 54Mbps




FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1304FR31-2	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J

RESULT PLOTS: _20 MHz BW

Conducted Output Power (802.11n-CH 1) 6.5Mbps

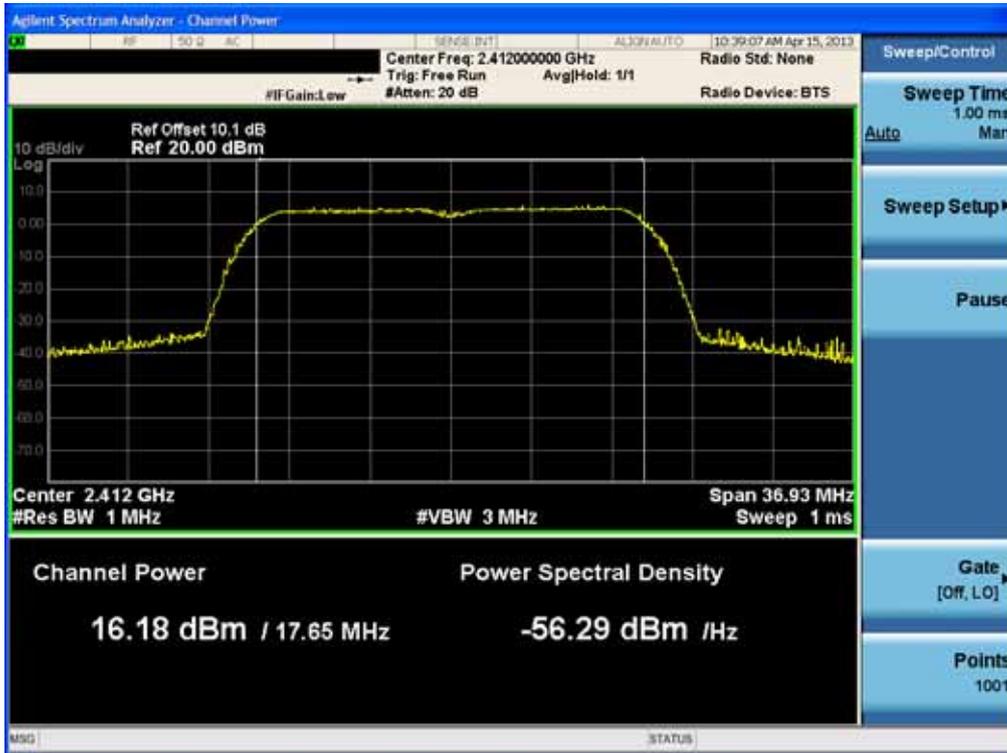

Conducted Output Power (802.11n-CH 1) 13Mbps

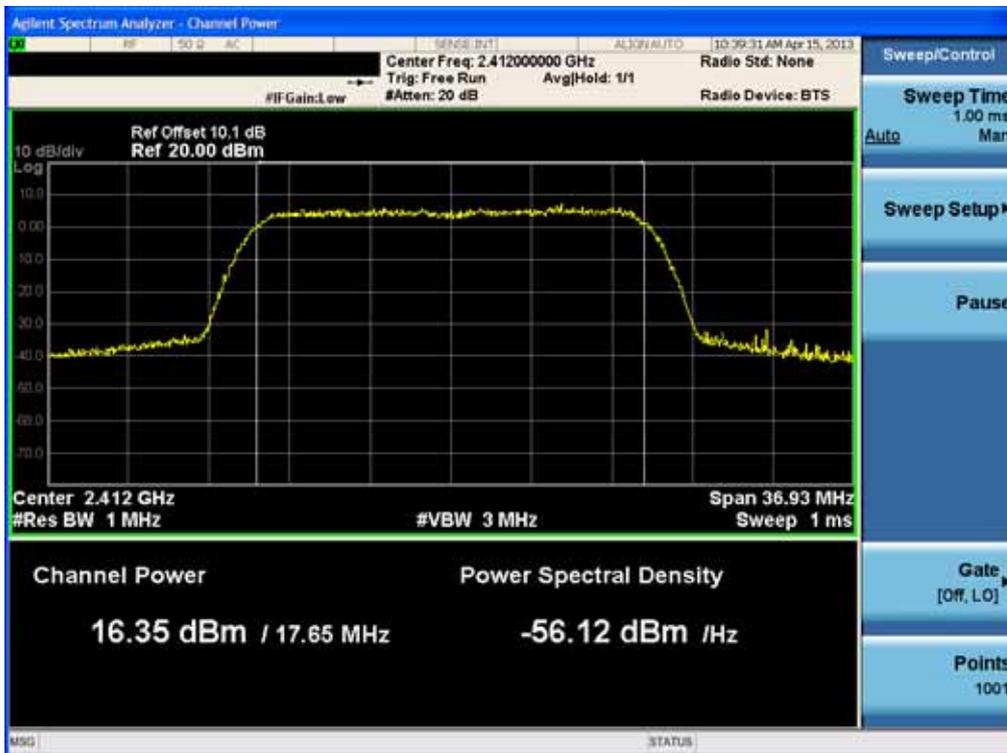

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1304FR31-2	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J

Conducted Output Power (802.11n-CH 1) 19.5Mbps



Conducted Output Power (802.11n-CH 1) 26Mbps



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1304FR31-2	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J

Conducted Output Power (802.11n-CH 1) 39Mbps



Conducted Output Power (802.11n-CH 1) 52Mbps




FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1304FR31-2	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J

Conducted Output Power (802.11n-CH 1) 58.5Mbps



Conducted Output Power (802.11n-CH 1) 65Mbps

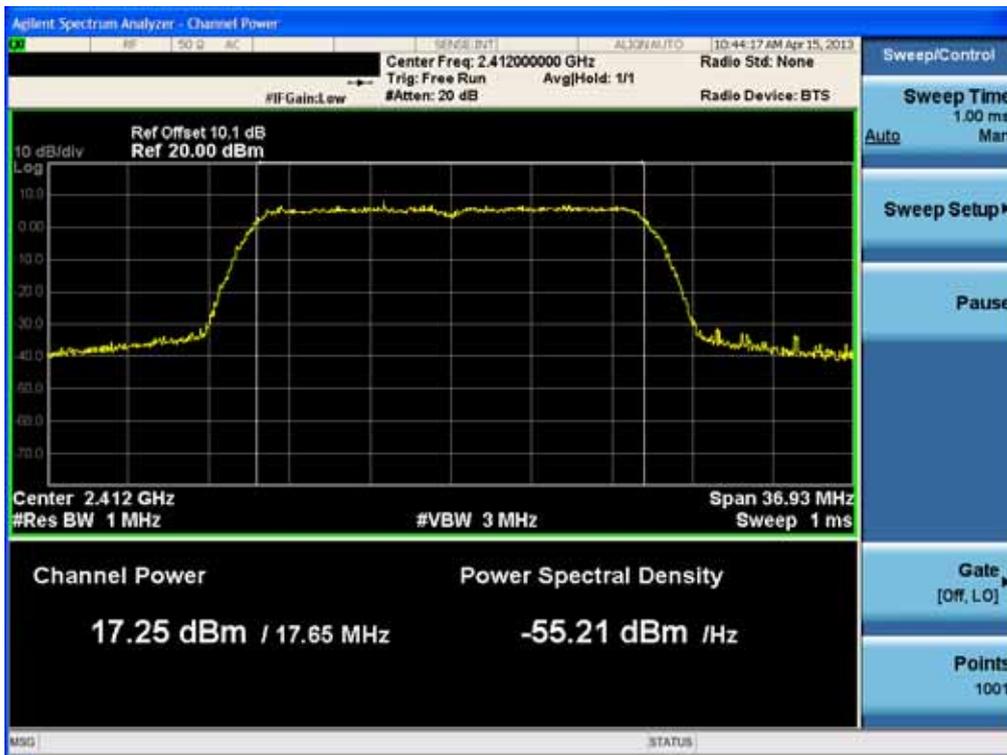

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1304FR31-2	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J

Conducted Output Power (802.11n-CH 6) 6.5Mbps



Conducted Output Power (802.11n-CH 6) 13Mbps




FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1304FR31-2	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J

Conducted Output Power (802.11n-CH 6) 19.5Mbps



Conducted Output Power (802.11n-CH 6) 26Mbps

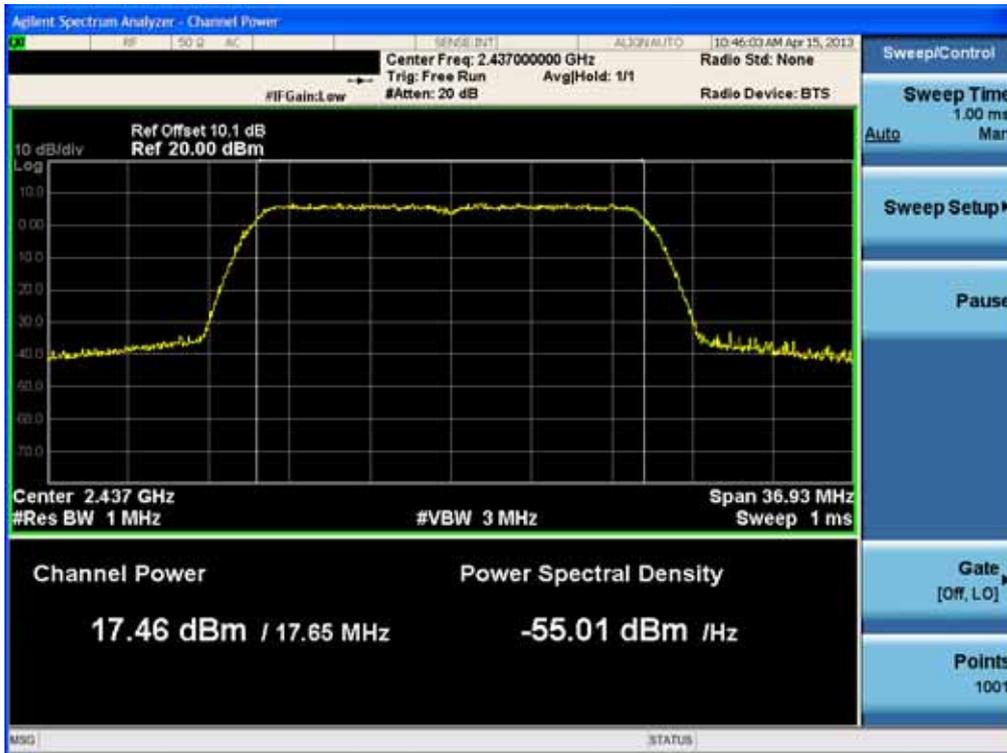

FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1304FR31-2	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J

Conducted Output Power (802.11n-CH 6) 39Mbps



Conducted Output Power (802.11n-CH 6) 52Mbps



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1304FR31-2	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J

Conducted Output Power (802.11n-CH 6) 58.5Mbps



Conducted Output Power (802.11n-CH 6) 65Mbps



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1304FR31-2	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J

Conducted Output Power (802.11n-CH 11) 6.5Mbps




Conducted Output Power (802.11n-CH 11) 13Mbps



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1304FR31-2	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J

Conducted Output Power (802.11n-CH 11) 19.5Mbps

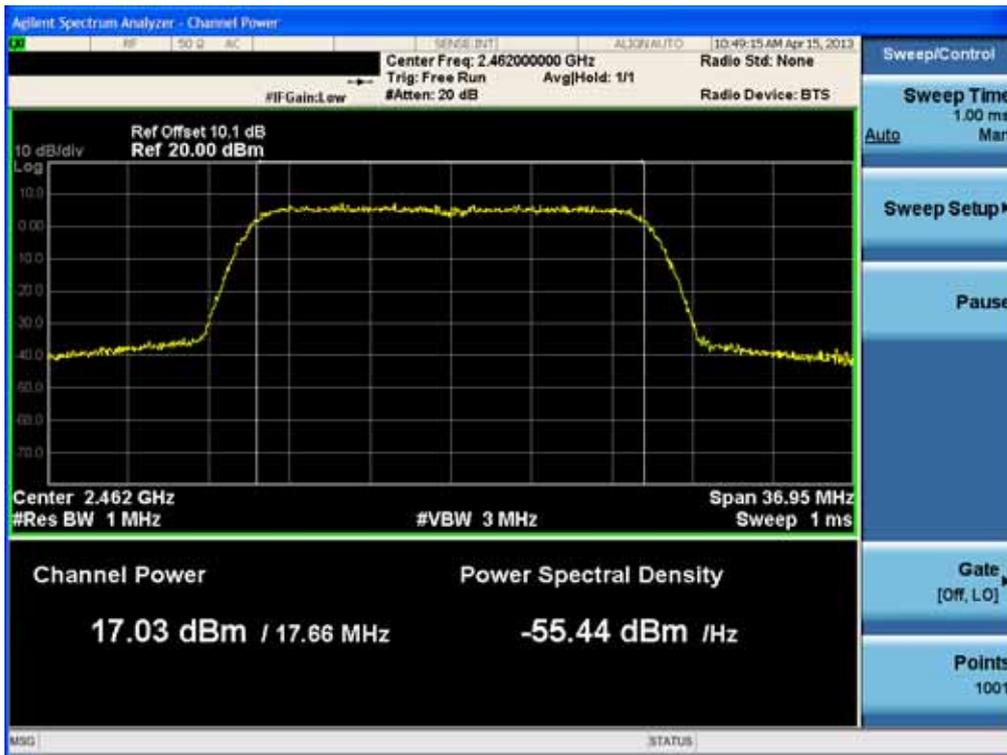

Conducted Output Power (802.11n-CH 11) 26Mbps



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1304FR31-2	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J

Conducted Output Power (802.11n-CH 11) 39Mbps



Conducted Output Power (802.11n-CH 11) 52Mbps



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1304FR31-2	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J

Conducted Output Power (802.11n-CH 11) 58.5Mbps



Conducted Output Power (802.11n-CH 11) 65Mbps



FCC PT.15.247 TEST REPORT	FCC CERTIFICATION REPORT		www.hct.co.kr
Test Report No. HCTR1304FR31-2	Date of Issue: May 06, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE450J