

# HCT CO., LTD.

## CERTIFICATE OF COMPLIANCE FCC Certification

<b>Applicant Name:</b> LG Electronics MobileComm U.S.A., Inc.	<b>Date of Issue:</b> May 21, 2013
<b>Address:</b> 1000 Sylvan Avenue, Englewood Cliffs NJ 07632	<b>Test Site/Location:</b> HCT CO., LTD., 105-1, Jangam-ri, Majang-Myeon, Icheon-si, Kyunggi-Do, Korea
	<b>Report No.:</b> HCTR1305FR14
	<b>HCT FRN:</b> 0005866421

**FCC ID:** ZNFE465G

**APPLICANT:** LG Electronics MobileComm U.S.A., Inc.

<b>FCC Model(s):</b>	LG-E465g
<b>Additional FCC Model(s):</b>	LGE465g, E465g
<b>EUT Type:</b>	GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n
<b>FCC Classification:</b>	Licensed Portable Transmitter Held to Ear (PCE)
<b>FCC Rule Part(s):</b>	§22, §24, §2
<b>Tx Frequency:</b>	824.20 - 848.80 MHz (GSM850) 826.40 - 846.60 MHz (WCDMA850) 1 850.20 - 1 909.80 MHz (GSM1900) 1 852.40 - 1 907.60 MHz (WCDMA1900)
<b>Rx Frequency:</b>	869.20 - 893.80 MHz (GSM850) 871.40 - 891.60 MHz (WCDMA850) 1 930.20 - 1 989.80 MHz (GSM1900) 1 932.40 - 1 987.60 MHz (WCDMA1900)
<b>Max. RF Output Power:</b>	0.578 W GSM850 (27.62 dBm) / 1.114 W GSM1900 (30.47 dBm) 0.124 W WCDMA850 (20.92 dBm) / 0.364 W WCDMA1900 (25.61 dBm)
<b>Emission Designator(s):</b>	248 KGXW (GSM850) / 248 KGXW (GSM1900) 4M17F9W (WCDMA850) / 4M18F9W (WCDMA1900)

The measurements shown in this report were made in accordance with the procedures specified in §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)



**Report prepared by**  
**: Kyung Soo Kang**  
**Test engineer of RF Team**



**Approved by**  
**: Chang Seok Choi**  
**Manager of RF Team**

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

FCC CERTIFICATION REPORT

FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1305FR14	Date of Issue: May 21, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	FCC ID: ZNFE465G

# Version

TEST REPORT NO.	DATE	DESCRIPTION
HCTR1305FR14	May 21, 2013	First Approval Report

# Table of Contents

1. GENERAL INFORMATION .....		4
2. INTRODUCTION .....		5
2.1. EUT DESCRIPTION.....		5
2.2. MEASURING INSTRUMENT CALIBRATION.....		5
2.3. TEST FACILITY .....		5
3. DESCRIPTION OF TESTS .....		6
3.1 ERP/EIRP RADIATED POWER AND RADIATED SPURIOUS EMISSIONS.....		6
3.2 PEAK- TO- AVERAGE RATIO .....		6
3.3 OCCUPIED BANDWIDTH.....		7
3.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....		8
3.5 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....		9
4. LIST OF TEST EQUIPMENT .....		10
5. SUMMARY OF TEST RESULTS .....		11
6. SAMPLE CALCULATION .....		12
7. TEST DATA .....		13
7.1 EFFECTIVE RADIATED POWER OUTPUT (GSM / WCDMA) .....		13
7.2 EQUIVALENT ISOTROPIC RADIATED POWER (GSM / WCDMA) .....		14
7.3 RADIATED SPURIOUS EMISSIONS .....		15
7.3.1 RADIATED SPURIOUS EMISSIONS (GSM850) .....		15
7.3.2 RADIATED SPURIOUS EMISSIONS (GSM1900) .....		16
7.3.3 RADIATED SPURIOUS EMISSIONS (WCDMA850) .....		17
7.3.4 SPURIOUS EMISSIONS (WCDMA1900).....		18
7.4 PEAK-TO-AVERAGE RATIO .....		19
7.5 OCCUPIED BANDWIDTH .....		19
7.6 CONDUCTED SPURIOUS EMISSIONS .....		20
7.6.1 BAND EDGE.....		20
7.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....		21
7.7.1 FREQUENCY STABILITY (GSM850) .....		21
7.7.2 FREQUENCY STABILITY (GSM1900) .....		22
7.7.3 FREQUENCY STABILITY (WCDMA850) .....		23
7.7.4 FREQUENCY STABILITY (WCDMA1900) .....		24
8. TEST PLOTS.....		25

**FCC CERTIFICATION REPORT**

[www.hct.co.kr](http://www.hct.co.kr)

<b>Test Report No.</b> HCTR1305FR14	<b>Date of Issue:</b> May 21, 2013	<b>EUT Type:</b> GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	<b>FCC ID:</b> ZNFE465G
--	---------------------------------------	---	----------------------------

# MEASUREMENT REPORT

## 1. GENERAL INFORMATION

**Applicant Name:** LG Electronics MobileComm U.S.A., Inc.

**Address:** 1000 Sylvan Avenue, Englewood Cliffs NJ 07632

**FCC ID:** ZNFE465G

**Application Type:** Certification

**FCC Classification:** Licensed Portable Transmitter Held to Ear (PCE)

**FCC Rule Part(s):** §22, §24, §2

**EUT Type:** GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n

**FCC Model(s):** LG-E465g

**Additional FCC Model(s):** LGE465g, E465g

**Tx Frequency:** 824.20 - 848.80 MHz (GSM850)  
826.40 - 846.60 MHz (WCDMA850)  
1 850.20 - 1 909.80 MHz (GSM1900)  
1 852.40 - 1 907.60 MHz (WCDMA1900)

**Rx Frequency:** 869.20 - 893.80 MHz (GSM850)  
871.40 - 891.60 MHz (WCDMA850)  
1 930.20 - 1 989.80 MHz (GSM1900)  
1 932.40 - 1 987.60 MHz (WCDMA1900)

**Max. RF Output Power:** 0.578 W GSM850 (27.62 dBm) / 1.114 W GSM1900 (30.47 dBm)  
0.124 W WCDMA850 (20.92 dBm) / 0.364 W WCDMA1900 (25.61 dBm)

**Emission Designator(s):** 248 KGXW (GSM850) / 248 KGXW (GSM1900)  
4M17F9W (WCDMA850) / 4M18F9W (WCDMA1900)

**Date(s) of Tests:** April 29, 2013 ~ May 16, 2013

**Antenna Specification** Manufacturer: Komatech Co., Ltd.  
Antenna type: Internal antenna  
Peak Gain: GSM850/WCDMA850 : -2.67 dBi  
GSM1900/WCDMA1900 : -0.93 dBi

**FCC CERTIFICATION REPORT**

[www.hct.co.kr](http://www.hct.co.kr)

**Test Report No.**  
HCTR1305FR14

**Date of Issue:**  
May 21, 2013

**EUT Type:**  
GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n

**FCC ID:**  
ZNFE465G



## **2. INTRODUCTION**

### **2.1. EUT DESCRIPTION**

The LG Electronics MobileComm U.S.A., Inc. LG-E465g GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n consists of GSM850, GSM1900, WCDMA850, WCDMA1900, GPRS Class12, HSDPA and HSUPA.

### **2.2. MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### **2.3. TEST FACILITY**

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the 105-1, Jangam-ri , Majang-Myeon, Icheon-si, 467-811, KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated March 02, 2011 (Registration Number: 90661)

FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
<b>Test Report No.</b> HCTR1305FR14	<b>Date of Issue:</b> May 21, 2013	<b>EUT Type:</b> GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	<b>FCC ID:</b> ZNFE465G

### **3. DESCRIPTION OF TESTS**

#### **3.1 ERP/EIRP RADIATED POWER AND RADIATED SPURIOUS EMISSIONS**

Note: ERP(Effective Radiated Power), EIRP(Equivalent Isotropic Radiated Power)

Test Procedure

Radiated emission measurements are performed in the Fully-anechoic chamber. The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-C-2004 Clause 2.2.17. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission. The level and position of the maximized emission is recorded with the spectrum analyzer using a positive peak detector.

A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(dBm)} = P_{g(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dB)}$$

Where:  $P_d$  is the dipole equivalent power and  $P_g$  is the generator output power into the substitution antenna.

The maximum EIRP is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration


#### **3.2 PEAK- TO- AVERAGE RATIO**

A peak to average ratio measurement is performed at the conducted port of the EUT. For CDMA and WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function ( CCDF ) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. Plots of the EUT's Peak- to- Average Ratio are shown herein.

<b>FCC CERTIFICATION REPORT</b>			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
<b>Test Report No.</b> HCTR1305FR14	<b>Date of Issue:</b> May 21, 2013	<b>EUT Type:</b> GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	<b>FCC ID:</b> ZNFE465G

### 3.3 OCCUPIED BANDWIDTH.

Test set-up

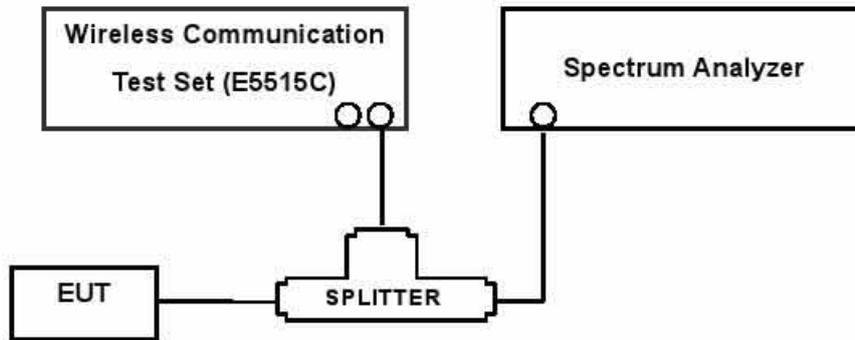

(Configuration of conducted Emission measurement)

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

Test Procedure

The EUT makes a call to the communication simulator. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels(low, middle and high operational range.)

The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

FCC CERTIFICATION REPORT

[www.hct.co.kr](http://www.hct.co.kr)

**Test Report No.**  
HCTR1305FR14

**Date of Issue:**  
May 21, 2013

**EUT Type:**  
GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n

**FCC ID:**  
ZNFE465G

### 3.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.

#### Test Procedure

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer.

On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB. The RBW settings used in the testing are greater than 1 % of the occupied bw. The 1 MHz RBW was used to scan from 10 MHz to 10 GHz. (GSM1900 Mode: 10 MHz to 20 GHz). A display line was placed at - 13 dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Measurements of all out of band are made on RBW = 1MHz and VBW  $\geq$  3 MHz in the worst case despite RBW = 100 kHz and VBW  $\geq$  300 kHz upon 1 GHz.

- RBW = 1 MHz
- VBW  $\geq$  3 MHz
- Detector = Peak
- Trace Mode = max hold
- Sweep time = auto
- Number of points in sweep  $\geq 2 * \text{Span} / \text{RBW}$

- Band Edge Requirement : According to FCC 22.917 , 24.238(a) specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

The EUT makes a call to the communication simulator. The power was measured with R&S Spectrum Analyzer. All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The center frequency of spectrum is the band edge frequency and span is 1MHz RB of the spectrum is 3KHz and VB of the spectrum is 3KHz (GSM)

The center frequency of spectrum is the band edge frequency and span is 5MHz RB of the spectrum is 100KHz and VB of the spectrum is 100KHz(WCDMA)

**NOTES:** The analyzer plot offsets have been determined by below conditions.

- For GSM850/WCDMA850, total offset 27 dBm  
= 20 dBm attenuator + 6 dBm Splitter + 1 dBm RF cables.
- For GSM1900 and WCDMA1900, total offset 27.7 dBm  
= 20 dBm attenuator + 6 dBm Splitter + 1.7 dBm RF cables.


**FCC CERTIFICATION REPORT**

[www.hct.co.kr](http://www.hct.co.kr)

<b>Test Report No.</b> HCTR1305FR14	<b>Date of Issue:</b> May 21, 2013	<b>EUT Type:</b> GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n	<b>FCC ID:</b> ZNFE465G
--	---------------------------------------	---	----------------------------

### 3.5 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

#### Test Set-up

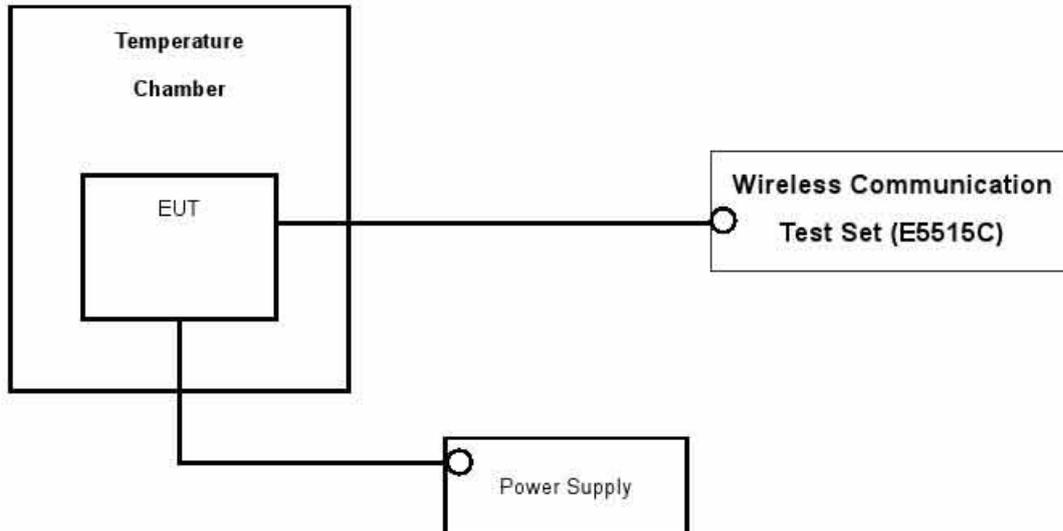

\* Nominal Operating Voltage

#### Test Procedure

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from battery end point to 115 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification — the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm) of the center frequency.

#### Time Period and Procedure:

- The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
1. The equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
  2. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

**NOTE: The EUT is tested down to the battery endpoint.**

FCC CERTIFICATION REPORT			<a href="http://www.hct.co.kr">www.hct.co.kr</a>
Test Report No. HCTR1305FR14	Date of Issue: May 21, 2013	EUT Type: GSM/WCDMA Phone with Bluetooth3.0, WIF1802.11 b/g/n	FCC ID: ZNFE465G

## 4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Interval	Calibration Due
Agilent	E9327A/ Power Sensor	MY4442009	Annual	04/16/2014
MITEQ	AMF-6D-001180-35-20P/AMP	1081666	Annual	09/11/2013
Wainwright	WHK1.2/15G-10EF/H.P.F	2	Annual	04/25/2014
Wainwright	WHK3.3/18G-10EF/H.P.F	1	Annual	04/25/2014
Hewlett Packard	11667B / Power Splitter	10126	Annual	11/07/2013
Digital	EP-3010/ Power Supply	3110117	Annual	11/07/2013
Schwarzbeck	UHAP/ Dipole Antenna	557	Biennial	03/05/2015
Schwarzbeck	UHAP/ Dipole Antenna	558	Biennial	05/03/2015
Korea Engineering	KR-1005L / Chamber	KRAB05063-3CH	Annual	11/07/2013
Schwarzbeck	BBHA 9120D/ Horn Antenna	296	Biennial	02/20/2014
Schwarzbeck	BBHA 9120D/ Horn Antenna	937	Biennial	10/17/2013
Agilent	E4440A/Spectrum Analyzer	US45303008	Annual	04/25/2014
WEINSCHL	ATTENUATOR	BR0592	Annual	11/07/2013
RECHDE&SCHWARZ	FSV40/Spectrum Analyzer	1307.9002K40-100931-NK	Annual	06/11/2013
Agilent	8960 (E5515C)/ Base Station	GB44400269	Annual	02/14/2014

### FCC CERTIFICATION REPORT

[www.hct.co.kr](http://www.hct.co.kr)
**Test Report No.**  
HCTR1305FR14

**Date of Issue:**  
May 21, 2013

**EUT Type:**  
GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n

**FCC ID:**  
ZNFE465G

## 5. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result
2.1049, 22.917(a), 24.238(a)	Occupied Bandwidth	N/A	CONDUCTED	PASS
2.1051, 22.917(a), 24.238(a)	Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions		PASS
*2.1046	Conducted Output Power	N/A		PASS
24.232(d)	Peak- to- Average Ratio	< 13 dB		PASS
2.1055, 22.355, 24.235	Frequency stability / variation of ambient temperature	< 2.5 ppm		PASS
22.913(a)(2) 24.232(c)	Effective Radiated Power	< 7 Watts max. ERP	RADIATED	PASS
	Equivalent Isotropic Radiated Power	< 2 Watts max. EIRP		PASS
2.1053, 22.917(a), 24.238(a)	Radiated Spurious and Harmonic Emissions	< 43 + 10log10 (P[Watts]) for all out-of band emissions		PASS

\*: See RF Exposure Report

### FCC CERTIFICATION REPORT

[www.hct.co.kr](http://www.hct.co.kr)

Test Report No.  
HCTR1305FR14

Date of Issue:  
May 21, 2013

EUT Type:  
GSM/WCDMA Phone with Bluetooth3.0, WiFi802.11 b/g/n

FCC ID:  
ZNFE465G

## 6. SAMPLE CALCULATION

### A. ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP		ERP Limit (dBm)	Margin (dB)
Channel	Freq.(MHz)						W	dBm		
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84	38.45	-11.61

**ERP = SubstituteLEVEL(dBm) + Ant. Gain – CL(Cable Loss)**

- 1) The EUT mounted on a non-conductive turntable is 0.8 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power (ERP).

### **B. Emission Designator**

#### **GSM Emission Designator**

**Emission Designator = 249KGXW**

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

#### **WCDMA Emission Designator**

**Emission Designator = 4M17F9W**

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

## 7. TEST DATA

### 7.1 EFFECTIVE RADIATED POWER OUTPUT (GSM / WCDMA)

(GSM850 Mode)

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP		ERP Limit (dBm)	Margin (dB)
Channel	Freq.(MHz)						W	dBm		
128	824.20	-20.59	39.18	-10.61	0.95	V	0.578	27.62	38.45	-10.83
190	836.60	-21.32	38.86	-10.54	0.96	V	0.545	27.36	38.45	-11.09
251	848.80	-21.36	39.06	-10.47	1.10	V	0.561	27.49	38.45	-10.96

(WCDMA850 Mode)

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP		ERP Limit (dBm)	Margin (dB)
Channel	Freq.(MHz)						W	dBm		
4132	826.40	-27.29	32.46	-10.59	0.95	V	0.124	20.92	38.45	-17.53
4183	836.60	-29.43	30.75	-10.54	0.96	V	0.084	19.25	38.45	-19.20
4233	846.60	-28.08	32.27	-10.48	1.11	V	0.117	20.68	38.45	-17.77

Note: Standard batteries are the only options for this phone. And a peak detector is used.

#### NOTES:

Effective Radiated Power Output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is y plane in GSM850 and WCDMA850 mode. Also worst case of detecting Antenna is vertical polarization in GSM850 and WCDMA850 mode.

#### FCC CERTIFICATION REPORT

[www.hct.co.kr](http://www.hct.co.kr)

Test Report No.  
HCTR1305FR14

Date of Issue:  
May 21, 2013

EUT Type:  
GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n

FCC ID:  
ZNFE465G

## 7.2 EQUIVALENT ISOTROPIC RADIATED POWER (GSM / WCDMA)

(GSM1900 Mode)

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP		EIRP Limit (dBm)	Margin (dB)
Channel	Freq.(MHz)						W	dBm		
512	1,850.20	-11.18	20.85	10.02	1.41	H	0.883	29.46	33.01	-3.55
661	1,880.00	-10.70	21.61	10.04	1.45	H	1.047	30.20	33.01	-2.81
810	1,909.80	-10.39	21.86	10.05	1.44	H	1.114	30.47	33.01	-2.54

(WCDMA1900 Mode)

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP		EIRP Limit (dBm)	Margin (dB)
Channel	Freq.(MHz)						W	dBm		
9262	1,852.40	-16.14	16.01	10.02	1.40	H	0.290	24.63	33.01	-8.38
9400	1,880.00	-16.17	16.14	10.04	1.45	H	0.297	24.73	33.01	-8.28
9538	1,907.60	-15.52	17.04	10.05	1.48	H	0.364	25.61	33.01	-7.40

Note: Standard batteries are the only options for this phone. And a peak detector is used.

### NOTES:

Equivalent Isotropic Radiated Power Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

This device was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA Inactive at 12.2 kbps RMC and TPC bits all set to "1" and in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band. This unit was tested with its standard battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is x plane in GSM1900 and WCDMA1900 mode. Also worst case of detecting Antenna is in horizontal polarization in GSM1900 and WCDMA1900 mode.

### FCC CERTIFICATION REPORT

[www.hct.co.kr](http://www.hct.co.kr)

Test Report No.  
HCTR1305FR14

Date of Issue:  
May 21, 2013

EUT Type:  
GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n

FCC ID:  
ZNF465G

### 7.3 RADIATED SPURIOUS EMISSIONS

#### 7.3.1 RADIATED SPURIOUS EMISSIONS (GSM850)

- MEASURED OUTPUT POWER: 27.62 dBm = 0.578 W
- MODULATION SIGNAL: GSM850
- DISTANCE: 3 meters
- LIMIT:  $43 + 10 \log_{10}(W) =$  40.62 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBd)	Substitute Level [dBm]	C.L	Pol.	ERP (dBm)	dBc
128 (824.2)	1,648.40	-40.28	7.05	-47.12	1.18	H	-41.25	68.87
	2,472.60	-53.71	7.90	-57.46	1.57	H	-51.13	78.75
	3,296.80	-51.09	9.91	-54.97	1.99	H	-47.05	74.67
190 (836.6)	1,673.20	-40.53	7.22	-47.53	1.20	V	-41.51	69.13
	2,509.80	-52.40	8.51	-56.19	1.65	H	-49.33	76.95
	3,346.40	-49.78	10.09	-54.17	2.00	H	-46.08	73.70
251 (848.8)	1,697.60	-38.74	7.34	-45.76	1.20	H	-39.62	67.24
	2,546.40	-53.66	8.61	-57.20	1.65	H	-50.24	77.86
	3,395.20	-48.72	10.22	-53.25	1.99	H	-45.02	72.64

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
  2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5<sup>th</sup> Harmonic for all channel.
  3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

**FCC CERTIFICATION REPORT**

[www.hct.co.kr](http://www.hct.co.kr)

**Test Report No.**  
HCTR1305FR14

**Date of Issue:**  
May 21, 2013

**EUT Type:**  
GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n

**FCC ID:**  
ZNFE465G

### 7.3.2 RADIATED SPURIOUS EMISSIONS (GSM1900)

- MEASURED OUTPUT POWER: 30.47 dBm = 1.114 W
- MODULATION SIGNAL: GSM 1900
- DISTANCE: 3 meters
- LIMIT:  $43 + 10 \log_{10}(W) =$  43.47 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	EIRP (dBm)	dBc
512 (1850.2)	3,700.40	-51.35	12.27	-56.09	2.19	H	-46.01	76.48
	5,550.60	-55.49	13.40	-55.16	2.88	H	-44.64	75.11
	7,400.80	-56.25	11.37	-45.96	3.29	H	-37.88	68.35
661 (1880.0)	3,760.00	-52.92	12.31	-57.47	2.11	V	-47.27	77.74
	5,640.00	-56.16	13.41	-55.49	2.92	V	-45.00	75.47
	7,520.00	-56.04	11.55	-46.52	3.34	H	-38.31	68.78
810 (1909.8)	3,819.60	-55.13	12.37	-59.61	2.14	H	-49.38	79.85
	5,729.40	-55.80	13.42	-54.36	3.02	V	-43.96	74.43
	7,639.20	-55.59	11.70	-45.83	3.13	V	-37.26	67.73

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
  2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5<sup>th</sup> Harmonic for all channel.
  3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

### 7.3.3 RADIATED SPURIOUS EMISSIONS (WCDMA850)

- MEASURED OUTPUT POWER: 20.92 dBm = 0.124 W
- MODULATION SIGNAL: WCDMA850
- DISTANCE: 3 meters
- LIMIT:  $-(43 + 10 \log_{10}(W)) =$  33.92 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBd)	Substitute Level [dBm]	C.L	Pol.	ERP (dBm)	dBc
4,132 (826.4)	1,652.80	-54.99	7.11	-61.92	1.20	H	-56.01	76.93
	2,479.20	-56.80	8.40	-60.69	1.62	H	-53.91	74.83
	3,305.60	-57.96	9.95	-62.14	1.99	V	-54.18	75.10
4,183 (836.6)	1,673.20	-54.91	7.22	-61.91	1.20	H	-55.89	76.81
	2,509.80	-57.18	8.51	-60.97	1.65	H	-54.11	75.03
	3,346.40	-57.31	10.09	-61.70	2.00	V	-53.61	74.53
4,233 (846.6)	1,693.20	-51.22	7.34	-58.24	1.20	V	-52.10	73.02
	2,539.80	-57.24	8.58	-61.16	1.65	H	-54.23	75.15
	3,386.40	-56.58	10.19	-61.01	1.98	V	-52.80	73.72

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
  2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5<sup>th</sup> Harmonic for all channel.
  3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

### 7.3.4 SPURIOUS EMISSIONS (WCDMA1900)

- MEASURED OUTPUT POWER: 25.61 dBm = 0.364 W
- MODULATION SIGNAL: WCDMA1900
- DISTANCE: 3 meters
- LIMIT:  $43 + 10 \log_{10}(W) =$  38.61 dBc

Ch.	Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	EIRP (dBm)	dBc
9262	3,704.80	-39.79	12.27	-44.53	2.19	V	-34.45	60.06
	5,557.20	-56.55	13.40	-56.22	2.88	H	-45.70	71.31
	7,409.60	-58.98	11.37	-48.69	3.29	V	-40.61	66.22
9400	3,760.00	-46.09	12.31	-50.64	2.11	H	-40.44	66.05
	5,640.00	-57.74	13.41	-57.07	2.92	H	-46.58	72.19
	7,520.00	-59.50	11.55	-49.98	3.34	H	-41.77	67.38
9538	3,815.20	-50.29	12.37	-54.77	2.14	V	-44.54	70.15
	5,722.80	-57.21	13.42	-55.77	3.02	H	-45.37	70.98
	7,630.40	-57.87	11.70	-48.11	3.13	H	-39.54	65.15

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
  2. The magnitude of spurious emissions attenuated more than 20dB below the limit above 5<sup>th</sup> Harmonic for all channel.
  3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

## 7.4 PEAK-TO-AVERAGE RATIO

- Plots of the EUT's Peak- to- Average Ratio are shown Page 29, 22.

## 7.5 OCCUPIED BANDWIDTH

Band	Channel	Frequency(MHz)	Data (GSM: kHz / WCDMA : MHz)
GSM850	128	824.20	243.4728
	190	836.60	246.4755
	251	848.80	248.1410
GSM1900	512	1850.20	247.5786
	661	1880.00	247.8060
	810	1909.80	243.7649
WCDMA850	4132	826.40	4.1704
	4183	836.60	4.1736
	4233	846.60	4.1686
WCDMA1900	9262	1852.40	4.1771
	9400	1880.00	4.1763
	9538	1907.60	4.1629

- Plots of the EUT's Occupied Bandwidth are shown Page 26 ~ 28, 29 ~ 32.

## 7.6 CONDUCTED SPURIOUS EMISSIONS

Band	Channel	Frequency of Maximum Harmonic (GHz)	Maximum Data (dBm)
GSM850	128	4.642910	-29.09
	190	4.968940	-28.40
	251	4.811890	-29.27
GSM1900	512	6.951250	-25.27
	661	5.598650	-25.30
	810	6.984710	-24.90
WCDMA850	4132	4.990810	-29.59
	4183	4.913770	-28.07
	4233	4.959490	-28.99
WCDMA1900	9262	10.296550	-25.72
	9400	10.309710	-25.44
	9538	6.979220	-25.31

- Plots of the EUT's Conducted Spurious Emissions are shown Page 41 ~ 52.

### 7.6.1 BAND EDGE


- Plots of the EUT's Band Edge are shown Page 33 ~ 40.

## 7.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

### 7.7.1 FREQUENCY STABILITY (GSM850)

- ▣ OPERATING FREQUENCY: 836,600,000 Hz
- ▣ CHANNEL: 190
- ▣ REFERENCE VOLTAGE: 3.8 VDC
- ▣ DEVIATION LIM IT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.800	+20(Ref)	836 599 992	0	0.000 000	0.000
100%		-30	836 599 986	-5.70	-0.000 001	-0.007
100%		-20	836 600 001	8.91	0.000 001	0.011
100%		-10	836 600 002	10.05	0.000 001	0.012
100%		0	836 599 999	6.72	0.000 001	0.008
100%		+10	836 600 000	7.89	0.000 001	0.009
100%		+30	836 599 999	6.77	0.000 001	0.008
100%		+40	836 600 001	9.52	0.000 001	0.011
100%		+50	836 600 001	8.83	0.000 001	0.011
115%	4.370	+20	836 599 987	-5.39	-0.000 001	-0.006
Batt. Endpoint	3.500	+20	836 599 999	6.72	0.000 001	0.008

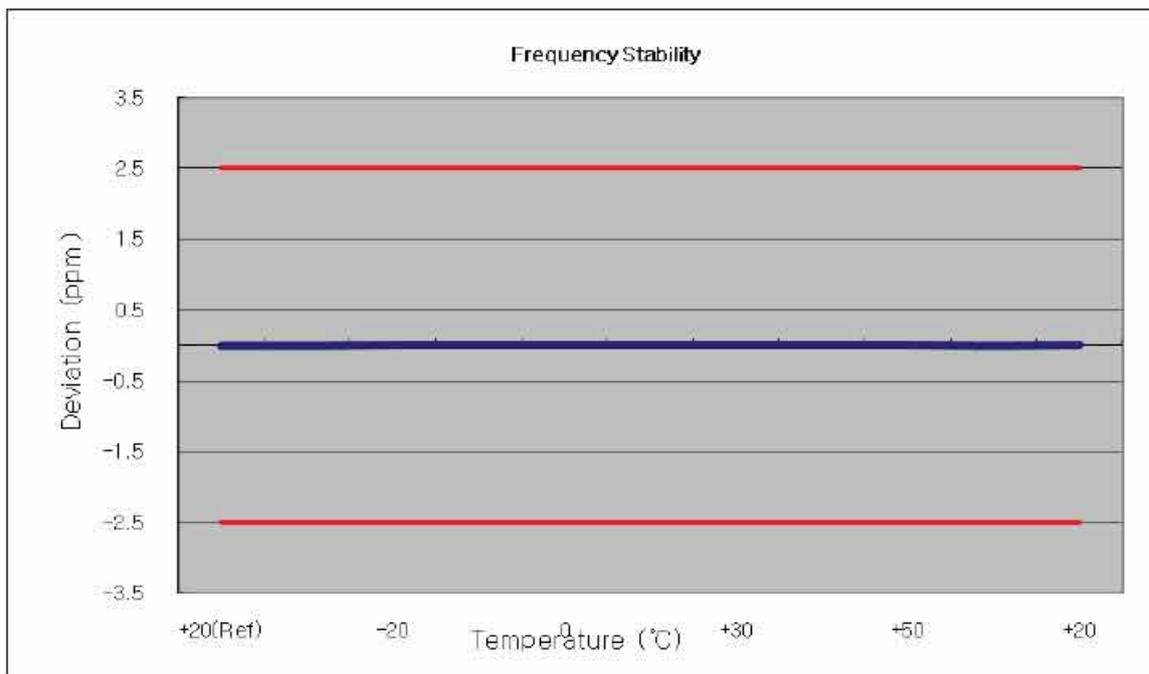

#### FCC CERTIFICATION REPORT

[www.hct.co.kr](http://www.hct.co.kr)

Test Report No.  
HCTR1305FR14

Date of Issue:  
May 21, 2013


EUT Type:  
GSM/WCDMA Phone with Bluetooth3.0, WIF1802.11 b/g/n

FCC ID:  
ZNFE465G

### 7.7.2 FREQUENCY STABILITY (GSM1900)

- ▣ OPERATING FREQUENCY: 1880,000,000 Hz
- ▣ CHANNEL: 661
- ▣ REFERENCE VOLTAGE: 3.8 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.800	+20(Ref)	1879 999 977	0	0.000 000	0.000
100%		-30	1879 999 999	22.26	0.000 001	0.012
100%		-20	1880 000 005	28.22	0.000 002	0.015
100%		-10	1880 000 000	22.92	0.000 001	0.012
100%		0	1880 000 005	28.20	0.000 002	0.015
100%		+10	1880 000 008	31.23	0.000 002	0.017
100%		+30	1879 999 995	18.59	0.000 001	0.010
100%		+40	1880 000 003	26.74	0.000 001	0.014
100%		+50	1880 000 000	23.56	0.000 001	0.013
115%		4.370	+20	1880 000 002	25.75	0.000 001
Batt. Endpoint	3.500	+20	1880 000 002	25.08	0.000 001	0.013

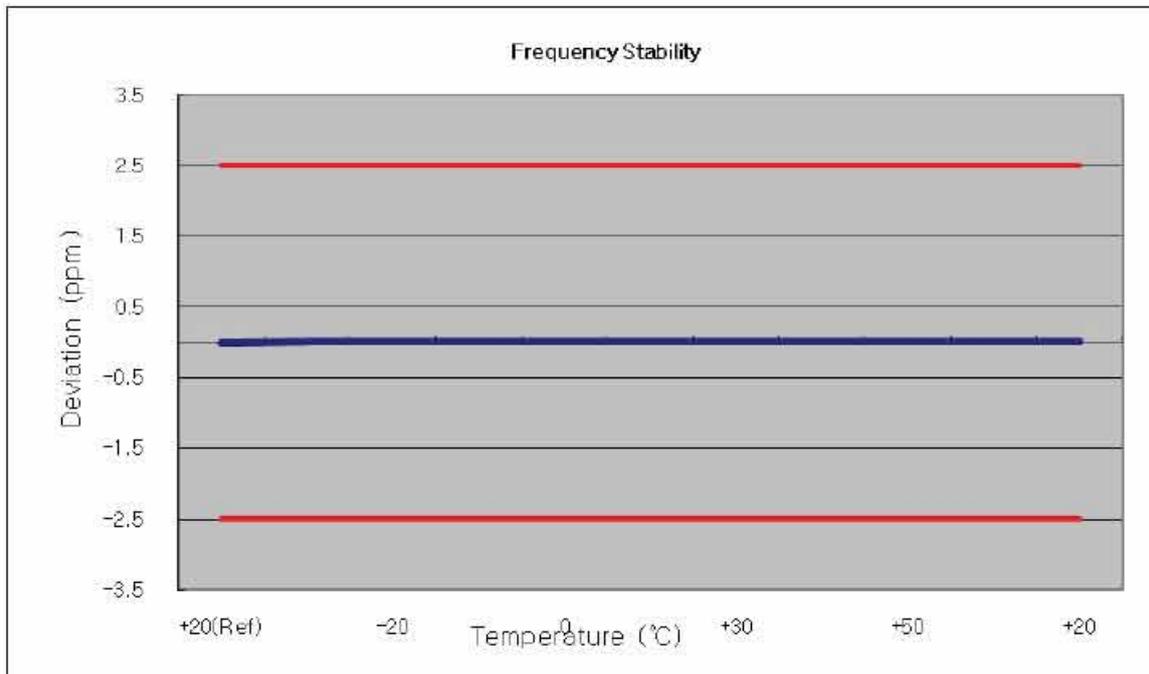


**FCC CERTIFICATION REPORT**

### 7.7.3 FREQUENCY STABILITY (WCDMA850)

- ▣ OPERATING FREQUENCY: 836,600,000 Hz
- ▣ CHANNEL: 4183
- ▣ REFERENCE VOLTAGE: 3.8 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.800	+20(Ref)	836 599 996	0	0.000 000	0.000
100%		-30	836 600 003	3.03	0.000 000	0.004
100%		-20	836 599 995	-4.79	-0.000 001	-0.006
100%		-10	836 600 004	3.75	0.000 000	0.004
100%		0	836 600 003	2.96	0.000 000	0.004
100%		+10	836 600 003	2.75	0.000 000	0.003
100%		+30	836 600 004	3.69	0.000 000	0.004
100%		+40	836 600 003	2.66	0.000 000	0.003
100%		+50	836 599 997	-3.37	0.000 000	-0.004
115%		4.370	+20	836 600 003	2.57	0.000 000
Batt. Endpoint	3.500	+20	836 600 003	2.85	0.000 000	0.003

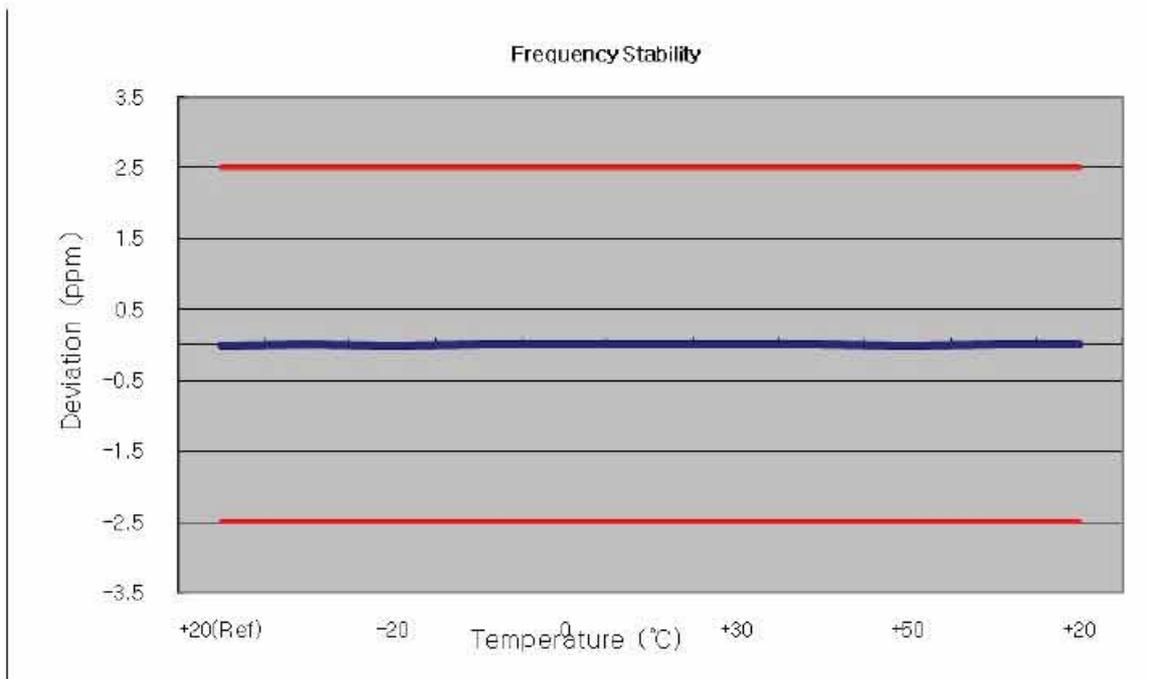

**FCC CERTIFICATION REPORT**

[www.hct.co.kr](http://www.hct.co.kr)

**Test Report No.**  
HCTR1305FR14

**Date of Issue:**  
May 21, 2013


**EUT Type:**  
GSM/WCDMA Phone with Bluetooth3.0, WIFI802.11 b/g/n

**FCC ID:**  
ZNFE465G

### 7.7.4 FREQUENCY STABILITY (WCDMA1900)

- ▣ OPERATING FREQUENCY: 1,880,000,000 Hz
- ▣ CHANNEL: 9400
- ▣ REFERENCE VOLTAGE: 3.8 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.800	+20(Ref)	1879 999 993	0	0.000 000	0.000
100%		-30	1880 000 008	8.17	0.000 000	0.004
100%		-20	1880 000 006	6.49	0.000 000	0.003
100%		-10	1880 000 008	8.37	0.000 000	0.004
100%		0	1879 999 993	-7.39	0.000 000	-0.004
100%		+10	1879 999 994	-6.32	0.000 000	-0.003
100%		+30	1879 999 993	-6.67	0.000 000	-0.004
100%		+40	1880 000 007	6.70	0.000 000	0.004
100%		+50	1880 000 008	8.09	0.000 000	0.004
115%		4.370	+20	1880 000 011	11.20	0.000 001
Batt. Endpoint	3.500	+20	1880 000 006	5.93	0.000 000	0.003

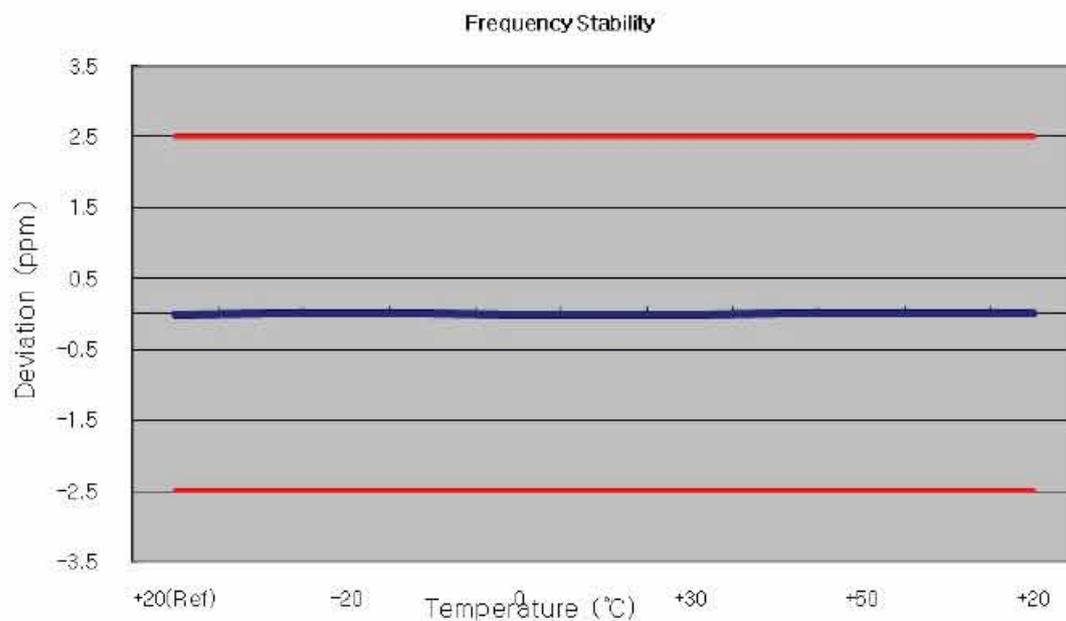

**FCC CERTIFICATION REPORT**

[www.hct.co.kr](http://www.hct.co.kr)

**Test Report No.**  
HCTR1305FR14

**Date of Issue:**  
May 21, 2013

**EUT Type:**  
GSM/WCDMA Phone with Bluetooth3.0, WiFi802.11 b/g/n

**FCC ID:**  
ZNFE465G