

RF TEST REPORT

Test item : Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA Phone
with Bluetooth and WLAN
Model No. : LG-E510g, E510g, LGE510g, LG-E510G, E510G, LGE510G
Order No. : 1108-01120
Date of receipt : 2011-08-16
Test duration : 2011-08-25 ~ 2011-09-05
Date of issue : 2011-09-09
Use of report : Original Grant


Applicant : LG Electronics MobileComm U.S.A., Inc.
10101 Old Grove Road., San Diego, CA 92131

Test laboratory : Digital EMC Co., Ltd.
683-3, Yubang-Dong, Cheoin-Gu, Yongin-Si, Kyunggi-Do, 449-080, Korea

Test specification : §22(H), §24(E)
Test environment : See appended test report
Test result : Pass Fail

The test results presented in this test report are limited only to the sample supplied by applicant and the use of this test report is inhibited other than its purpose. This test report shall not be reproduced except in full, without the written approval of DIGITAL EMC CO., LTD.

Tested by:




Engineer
S.K. Ryu

Witnessed by:

N/A

Reviewed by:



Manager
W.J. Lee

Test Report Version

Test Report No.	Date	Description
DRTFCC1109-0338	September 09, 2011	Final version for approval

Table of Contents

1. GENERAL INFORMATION	4
2. INTRODUCTION	5
2.1. EUT DESCRIPTION.....	5
2.2. MEASURING INSTRUMENT CALIBRATION	5
2.3. TEST FACILITY	5
3. DESCRIPTION OF TESTS.....	6
3.1 ERP & EIRP	6
3.2 PEAK TO AVERAGE RATIO	7
3.3 OCCUPIED BANDWIDTH.	8
3.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	9
3.5 RADIATED SPURIOUS EMISSIONS	10
3.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	11
4. LIST OF TEST EQUIPMENT.....	12
5. SUMMARY OF TEST RESULTS	13
6. SAMPLE CALCULATION	14
7. TEST DATA	15
7.1 CONDUCTED OUTPUT POWER	15
7.2 PEAK TO AVERAGE RATIO	16
7.3 OCCUPIED BANDWIDTH	16
7.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	16
7.5 BAND EDGE.....	16
7.6 EFFECTIVE RADIATED POWER (GSM850/ WCDMA850).....	17
7.7 EQUIVALENT ISOTROPIC RADIATED POWER (GSM1900/WCDMA1900) ...	18
7.8 RADIATED SPURIOUS EMISSIONS	19
7.8.1 RADIATED SPURIOUS EMISSIONS (GSM850)	19
7.8.2 RADIATED SPURIOUS EMISSIONS (WCDMA850)	20
7.8.3 RADIATED SPURIOUS EMISSIONS (GSM1900)	21
7.8.4 RADIATED SPURIOUS EMISSIONS (WCDMA1900)	22
7.9 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	23
7.9.1 FREQUENCY STABILITY (GSM850)	23
7.9.2 FREQUENCY STABILITY (WCDMA850)	24
7.9.3 FREQUENCY STABILITY (GSM1900)	25
7.9.4 FREQUENCY STABILITY (WCDMA1900)	26
8. TEST PLOTS.....	27

1. GENERAL INFORMATION

Applicant Name: LG Electronics MobileComm U.S.A., Inc.

Address: 10101 Old Grove Road., San Diego, CA 92131

FCC ID : ZNFE510G

FCC Classification : Licensed Portable Transmitter Held to Ear (PCE)

EUT Type : Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA Phone with Bluetooth and WLAN

Model Name : LG-E510g

Add Model Name : E510g, LGE510g, LG-E510G, E510G, LGE510G

Supplying power : Standard Battery
- Type: Li-Ion Battery
- M/N: BL-44JN
- Rating: DC 3.7V & 1540mAh 5.7Wh

Antenna Information : Internal Antenna
- Type: Built-In type

Tx Frequency : GSM850: 824.2 ~ 848.8 MHz
GSM1900: 1850.2 ~ 1909.8 MHz
EDGE850: 824.2 ~ 848.8 MHz
EDGE1900: 1850.2 ~ 1909.8 MHz
WCDMA850: 826.4 ~ 846.6 MHz
WCDMA1900: 1852.4 ~ 1907.6 MHz

Rx Frequency : GSM850: 869.2 ~ 893.8 MHz
GSM1900: 1930.2 ~ 1989.8 MHz
EDGE850: 869.2 ~ 893.8 MHz
EDGE1900: 1930.2 ~ 1989.8 MHz
WCDMA850: 871.4 ~ 891.6 MHz
WCDMA1900: 1932.4 ~ 1987.6 MHz

Max. RF Output Power : GSM850: 1.603W ERP(32.05dBm)
GSM1900: 1.012W EIRP(30.05dBm)
EDGE850: 0.508W ERP(27.06dBm)
EDGE1900: 0.275W EIRP(24.40dBm)
WCDMA850: 0.324W ERP(25.11dBm)
WCDMA1900: 0.288W EIRP(24.60dBm)

Emission Designator(s) : GSM850: 246KGXW
GSM1900: 250KGXW
EDGE850: 244KG7W
EDGE1900: 247KG7W
WCDMA850: 4M18F9W
WCDMA1900: 4M18F9W

2. INTRODUCTION

2.1. EUT DESCRIPTION

The Equipment Under Test(EUT) supports a dual band(Cellular/PCS) with GSM/GPRS/EDGE/WCDMA/HSDPA, Bluetooth and 802.11b/g/n(HT20).

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The 10M test site and conducted measurement facility used to collect the radiated data are located at the 683-3, Yubang-Dong, Yongin-Si, Gyunggi-Do, 449-080, South Korea. The site is constructed in conformance with the requirements.


- 10M test site registration Number: 101842

3. DESCRIPTION OF TESTS

3.1 ERP & EIRP

(Effective Radiated Power & Equivalent Isotropic Radiated Power)

Test Set-up

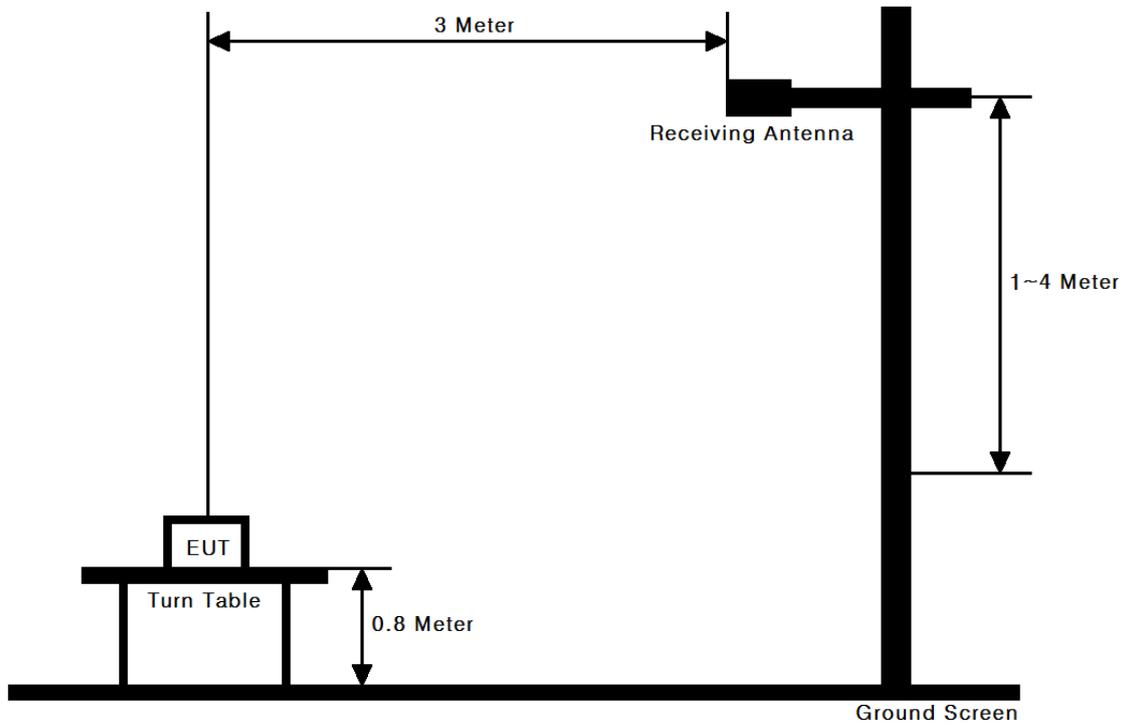

Test Procedure

These measurements were performed outdoors at 3meter test range. The equipment under test is placed on a wooden turntable 0.8-meters above the ground plane and 3-meters from the receive antenna.

The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading.

For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic antenna are taken into consideration.


3.2 PEAK TO AVERAGE RATIO

A peak to average ratio measurement is performed at the conducted port of the EUT. For CDMA and WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. Plots of the EUT's Peak- to- Average Ratio are shown herein.

3.3 OCCUPIED BANDWIDTH.

Test set-up

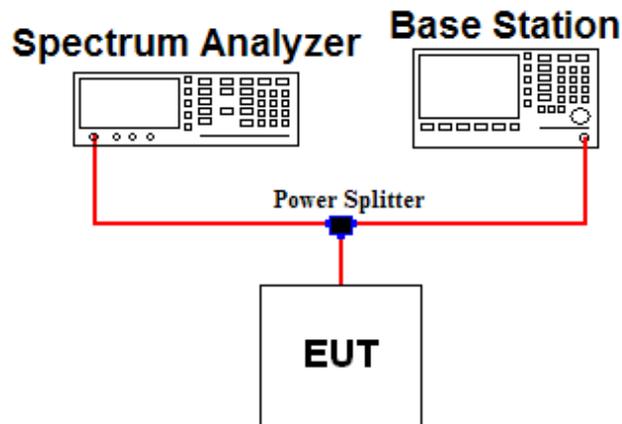


Test Procedure

The EUT was setup to maximum output power at its lowest channel. The occupied bandwidth was measured using a spectrum analyzer. The measurements are repeated for the highest and a middle channel. The EUT's occupied bandwidth is measured as the width of the signal between two points, one below the carrier center frequency and one above the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. Plots of the EUT's occupied bandwidth are shown herein.

3.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.

Test set-up

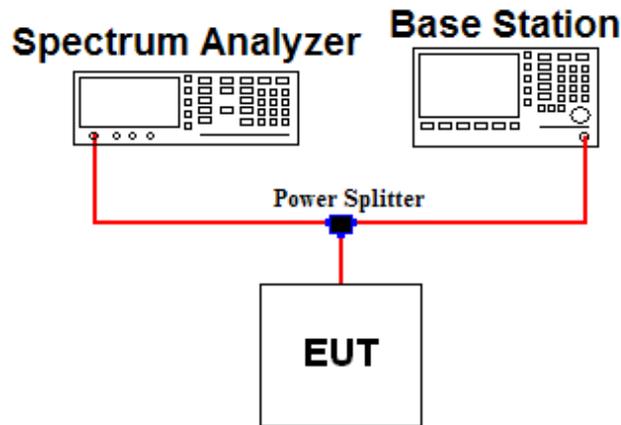

Test Procedure

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer.

The EUT was setup to maximum output power at its lowest channel. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. The Resolution BW of the analyzer is set to 1 % of the emission bandwidth to show compliance with -13dBm limit $[43+10\log(P)]$, in the 1 MHz bands immediately outside and adjacent to the edge of the frequency block.

A display line was placed at -13dBm to show compliance. The high, lowest and a middle channel were tested for out of band measurements.

Band Edge Requirement

In the 1MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.

3.5 RADIATED SPURIOUS EMISSIONS

Test Set-up



Test Procedure

This measurement was performed outdoors at 3meter test range. The equipment under test is placed on a wooden turntable 0.8-meters above the ground plane and 3-meters from the receive antenna.

The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer.


For radiated power measurements below 1GHz, a half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading.

For radiated power measurements above 1GHz, a Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. The difference between the gain of the horn and an isotropic antenna are taken into consideration.

This measurement was performed with the EUT oriented in 3 orthogonal axis.

3.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

Test Set-up

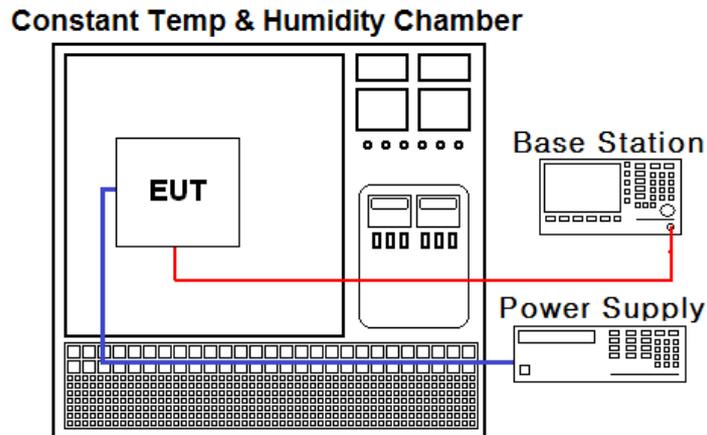

Test Procedure

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from battery end point to 115 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification - the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency.

Time Period and Procedure:

The carrier frequency of the transmitter is measured at room temperature. (25°C to provide a reference).

1. The equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
2. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

NOTE: The EUT is tested down to the battery endpoint.

4. LIST OF TEST EQUIPMENT

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal.Date (yy/mm/dd)	S/N
Spectrum Analyzer	Agilent	E4440A	10/09/30	11/09/30	MY45304199
Spectrum Analyzer	Agilent	N9020A	11/01/07	12/01/07	MY49100833
Power Splitter	Anritsu	K241B	10/10/05	11/10/05	020611
TEMP & HUMIDITY Chamber	JISCO	KR-100/J-RHC2	10/10/04	11/10/04	30604493/021031
Digital Multimeter	H.P	34401A	11/03/07	12/03/07	3146A13475, US36122178
Signal Generator	Rohde Schwarz	SMR20	11/03/08	12/03/08	101251
Vector Signal Generator	Rohde Schwarz	SMJ100A	11/01/11	12/01/11	100148
8960 Series 10 Wireless Comms. Test Set	Agilent	E5515C	11/03/07	12/03/07	GB43461134
Universal Radio communication Tester	Rohde Schwarz	CMU 200	11/03/07	12/03/07	106760
Thermo hygrometer	BODYCOM	BJ5478	11/01/13	12/01/13	090205-2
DC Power Supply	HP	6622A	11/03/07	12/03/07	3448A03760
High-pass filter	Wainwright	WHNX2.1	N/A	N/A	1
High-Pass Filter	Wainwright	D82346	N/A	N/A	9
Tunable Notch Filter	Wainwright	WRCT800.0 /960.0-0.2/40-8SSK	N/A	N/A	32
Tunable Notch Filter	Wainwright	WRCD1700.0 /2000.0-0.2/40-10SSK	N/A	N/A	53
HORN ANT	ETS	3115	10/10/04	11/10/04	21097
HORN ANT	ETS	3115	11/03/22	12/03/22	6419
HORN ANT	Schwarzbeck	BBHA9120A	10/04/13	12/04/13	322
HORN ANT	A.H.Systems	SAS-574	11/03/25	13/03/25	154
HORN ANT	A.H.Systems	SAS-574	11/03/25	13/03/25	155
Dipole Antenna	Schwarzbeck	VHA9103	10/11/29	11/11/29	2116
Dipole Antenna	Schwarzbeck	VHA9103	10/11/29	11/11/29	2117
Dipole Antenna	Schwarzbeck	UHA9105	10/11/29	11/11/29	2261
Dipole Antenna	Schwarzbeck	UHA9105	10/11/29	11/11/29	2262
Attenuator (3dB)	WEINSCHEL	56-3	10/10/05	11/10/05	Y2342
Attenuator (10dB)	WEINSCHEL	23-10-34	10/10/01	11/10/01	BP4386
Attenuator (10dB)	WEINSCHEL	31696	10/10/05	11/10/05	446
Amplifier (30dB)	Agilent	8449B	11/03/07	12/03/07	3008A01590
Amplifier	EMPOWER	BBS3Q7ELU	10/10/04	11/10/04	1020
BICONICAL ANT.	Schwarzbeck	VHA 9103	10/12/21	12/12/21	91031946
LOG-PERIODIC ANT.	Schwarzbeck	UHALP9108A	10/07/07	12/07/07	590
Amplifier (25dB)	Agilent	8447D	11/03/07	12/03/07	2944A10144

5. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Parameter	Status Note 1
2.1046	Conducted Output Power	C
22.913(a) 24.232(c)	Effective Radiated Power Equivalent Isotropic Radiated Power	C
22.917(a) 24.238(a) 2.1049	Occupied Bandwidth	C
22.917(a) 24.238(a) 2.1051	Band Edge Spurious and Harmonic Emissions at Antenna Terminal	C
24.232(d)	Peak to Average Ratio	C
22.917(a) 24.238(a) 2.1053	Radiated Spurious and Harmonic Emissions	C
22.355 24.235 2.1055	Frequency Stability	C
<p>Note 1: C=Comply NC=Not Comply NT=Not Tested NA=Not Applicable</p>		

The sample was tested according to the following specification:
ANSI C-63.4-2003, ANSI/TIA/EIA-603-C-2004

6. SAMPLE CALCULATION

A. Emission Designator

GSM850 Emission Designator

Emission Designator = **246KGXW**
GSM OBW = 245.86kHz
(Measured at the 99.75% power bandwidth)
G = Phase Modulation
X = Cases not otherwise covered
W = Combination (Audio/Data)

GSM1900 Emission Designator

Emission Designator = **250KGXW**
GSM BW = 250.38kHz
(Measured at the 99.75% power bandwidth)
G = Phase Modulation
X = Cases not otherwise covered
W = Combination (Audio/Data)

EDGE850 Emission Designator

Emission Designator = **244KG7W**
GSM OBW = 244.20kHz
(Measured at the 99.75% power bandwidth)
G = Phase Modulation
7 = Two or more channels containing
quantized or digital information
W = Combination (Audio/Data)

EDGE1900 Emission Designator

Emission Designator = **247KG7W**
GSM OBW = 247.45 kHz
(Measured at the 99.75% power bandwidth)
G = Phase Modulation
7 = Two or more channels containing
quantized or digital information
W = Combination (Audio/Data)

WCDMA850 Emission Designator

Emission Designator = **4M18F9W**
WCDMA OBW = 4.1842 MHz
(Measured at the 99.75% power bandwidth)
F = Frequency Modulation
9 = Composite Digital Information
W = Combination (Audio/Data)


WCDMA1900 Emission Designator

Emission Designator = **4M18F9W**
WCDMA OBW = 4.1813 MHz
(Measured at the 99.75% power bandwidth)
F = Frequency Modulation
9 = Composite Digital Information
W = Combination (Audio/Data)

7. TEST DATA

7.1 CONDUCTED OUTPUT POWER

A base station simulator was used to establish communication with the EUT. The base station simulator parameters were set to produce the maximum power from the EUT. This device was tested under all configurations and the highest power is reported. Conducted Output Powers of EUT are reported below.

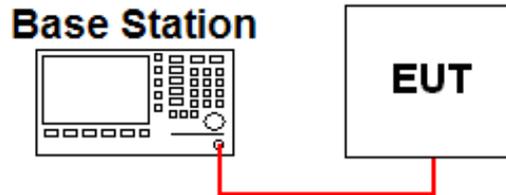

▪ GSM / GPRS / EDGE

Band	Channel	Test Result(dBm)								
		GSM	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot
Cellular	128	33.1	33.0	29.5	28.9	27.6	27.3	25.2	23.1	22.1
	190	33.0	32.9	29.4	28.8	27.6	27.2	25.2	23.1	22.2
	251	32.9	32.8	29.3	28.8	27.5	27.2	25.1	23.0	22.0
PCS	512	30.3	30.3	27.5	26.6	25.6	26.4	25.2	22.2	21.2
	661	30.4	30.3	27.6	26.6	25.7	26.3	25.3	22.3	21.2
	810	30.4	30.4	27.6	26.5	25.6	26.3	25.3	22.2	21.0

▪ WCDMA

3GPP Release Version	Mode		Power (dBm)			MPR	B _c	β _d	B _c /β _d	Sub-Test
	Channel		4132	4183	4233					
99	WCDMA	RMC	23.38	23.39	23.41	-	-	-	-	-
		ARM	23.37	23.37	23.40	-	-	-	-	-
5	HSDPA (Cellular)		23.17	23.19	23.25	0	2/15	15/15	2/15	1
5			23.16	23.18	23.19	0	12/15	15/15	12/15	2
5			23.15	23.12	23.17	0.5	15/15	8/15	15/8	3
5			23.14	23.13	23.23	0.5	15/15	4/15	15/4	4
-	Channel		9262	9400	9538	-	-	-	-	-
99	WCDMA	RMC	22.51	22.85	22.66	-	-	-	-	-
		ARM	22.48	22.77	22.57	-	-	-	-	-
5	HSDPA (PCS)		22.11	22.45	22.27	0	2/15	15/15	2/15	1
5			22.13	22.43	22.28	0	12/15	15/15	12/15	2
5			22.09	22.35	22.13	0.5	15/15	8/15	15/8	3
5			22.12	22.37	22.28	0.5	15/15	4/15	15/4	4

7.2 PEAK TO AVERAGE RATIO

- Plots of the EUT's Peak- to- Average Ratio are shown Page 27.

7.3 OCCUPIED BANDWIDTH

Band	Channel	Test Result(KHz)
GSM850	128	245.86
	190	241.51
	251	241.32
GSM1900	512	250.38
	661	245.69
	810	244.19
EDGE850	128	240.49
	190	244.09
	251	244.20
EDGE1900	512	246.75
	661	247.45
	810	236.41
WCDMA850	4132	4.1353
	4183	4.1842
	4233	4.1730
WCDMA1900	9262	4.1813
	9400	4.1679
	9538	4.1643

- Plots of the EUT's Occupied Bandwidth are shown Page 28 ~ 39.

7.4 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

- Plots of the EUT's Conducted Spurious Emissions are shown Page 40 ~ 57.

7.5 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 58 ~ 63.

7.6 EFFECTIVE RADIATED POWER (GSM850/ WCDMA850)**- GSM850 data**

Channel	EUT Position (Axis)	TEST CONDITIONS Power Step: 5					
		Ref. level (dBm)	Pol. (H/V)	ERP (dBm)	ERP (W)	Power Supply	Note.
128	Y	-5.11	V	30.32	1.076	DC 3.7V	GSM
190	X	-2.44	H	31.56	1.432	DC 3.7V	GSM
251	Y	-4.09	V	32.05	1.603	DC 3.7V	GSM
251	Y	-9.08	V	27.06	0.508	DC 3.7V	EDGE

- WCDMA850 data

Channel	EUT Position (Axis)	TEST CONDITIONS					
		Ref. level (dBm)	Pol. (H/V)	ERP (dBm)	ERP (W)	Power Supply	Note.
4132	Y	-12.46	V	23.84	0.242	DC 3.7V	WCDMA
4183	X	-9.28	H	24.98	0.315	DC 3.7V	WCDMA
4233	Z	-9.33	H	25.11	0.324	DC 3.7V	WCDMA

NOTES:

Effective Radiated Power Output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer.

For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz.

A half-wave dipole is substituted in place of the EUT. This dipole antenna is driven by a signal generator and the level of the signal generator is adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all configurations and the highest power is reported in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.

This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

7.7 EQUIVALENT ISOTROPIC RADIATED POWER (GSM1900/WCDMA1900)**- GSM1900 data**

Channel	EUT Position (Axis)	TEST CONDITIONS Power Step: 0						Note
		Ref. level (dBm)	Pol. (H/V)	Ant Gain (dBi)	EIRP (dBm)	EIRP (W)	Power Supply	
512	Z	-10.81	V	8.59	27.49	0.561	DC 3.7V	GSM
661	Z	-11.50	V	8.68	27.28	0.535	DC 3.7V	GSM
810	Z	-8.37	V	8.77	30.05	1.012	DC 3.7V	GSM
810	Z	-14.02	V	8.77	24.40	0.275	DC 3.7V	EDGE

- WCDMA1900 data

Channel	EUT Position (Axis)	TEST CONDITIONS						
		Ref. level (dBm)	Pol. (H/V)	Ant Gain (dBi)	EIRP (dBm)	EIRP (W)	Power Supply	Note
9262	X	-14.33	H	8.60	21.91	0.155	DC 3.7V	WCDMA
9400	Z	-15.40	V	8.68	23.38	0.218	DC 3.7V	WCDMA
9538	Z	-13.82	V	8.77	24.60	0.288	DC 3.7V	WCDMA

NOTES:

Effective Radiated Power Output Measurements by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer.

For CDMA signals, a peak detector is used, with RBW = VBW = 3 MHz. For WCDMA signals, a peak detector is used, with RBW = VBW = 5MHz. For AMPS, GSM, and NADC TDMA signals, a peak detector is used, with RBW = VBW = 1 MHz.

A half-wave dipole is substituted in place of the EUT. This dipole antenna is driven by a signal generator and the level of the signal generator is adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

This device was tested under all configurations and the highest power is reported in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.

This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

7.8 RADIATED SPURIOUS EMISSIONS

7.8.1 RADIATED SPURIOUS EMISSIONS (GSM850)

Channel (ERP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	(dBc)	Limit (dBc)
128 (1.076W)	1648.48	Z	H	-57.14	5.83	-51.31	81.63	43.32
	2472.70	Z	V	-61.02	7.16	-53.86	84.18	
	-	-	-	-	-	-	-	
190 (1.432W)	1673.03	Z	H	-54.89	5.90	-48.99	80.55	44.56
	2509.72	Z	V	-59.74	7.19	-52.55	84.11	
	-	-	-	-	-	-	-	
251 (1.603W)	1697.52	Z	H	-51.11	5.98	-45.13	77.18	45.05
	2546.09	Z	V	-58.40	7.21	-51.19	83.24	
	-	-	-	-	-	-	-	

- Limit Calculation = $43 + 10 \log_{10} (\text{ERP [W]})$ [dBc]

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.

This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

7.8.2 RADIATED SPURIOUS EMISSIONS (WCDMA850)

Channel (ERP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBd)	CORRECT GENERATOR LEVEL (dBm)	(dBc)	Limit (dBc)
4132 (0.242W)	1654.18	X	H	-62.60	5.84	-56.76	80.60	36.84
	2482.84	Z	V	-52.61	7.17	-45.44	69.28	
	-	-	-	-	-	-	-	
4183 (0.315 W)	1670.60	X	H	-63.31	5.39	-57.92	82.90	37.98
	2506.18	Y	H	-50.60	7.28	-43.32	68.30	
	-	-	-	-	-	-	-	
4233 (0.324W)	1695.44	X	H	-65.90	5.97	-59.93	85.04	38.11
	2541.98	Y	H	-57.33	7.20	-50.13	75.24	
	-	-	-	-	-	-	-	

- Limit Calculation = $43 + 10 \log_{10} (\text{ERP [W]})$ [dBc]

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.

This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

7.8.3 RADIATED SPURIOUS EMISSIONS (GSM1900)

Channel (EIRP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	(dBc)	Limit (dBc)
512 (0.561W)	7400.57	X	V	-50.26	11.53	-38.73	66.22	40.49
	12952.07	X	V	-38.01	13.82	-24.19	51.68	
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
661 (0.535W)	7520.22	Y	H	-40.77	11.51	-29.26	56.54	40.28
	13159.44	X	V	-38.12	12.62	-25.50	52.78	
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
810 (1.012W)	7639.49	Y	H	-41.00	11.48	-29.52	59.57	43.05
	13369.19	X	V	-39.22	12.94	-26.28	56.33	
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	

- Limit Calculation = $43 + 10 \log_{10} (\text{EIRP [W]})$ [dBc]

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.

This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

7.8.4 RADIATED SPURIOUS EMISSIONS (WCDMA1900)

Channel (EIRP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	LEVEL@ ANTENNA TERMINALS (dBm)	SUBSTITUTE ANTENNA GAIN (dBi)	CORRECT GENERATOR LEVEL (dBm)	(dBc)	Limit (dBc)
9262 (0.155W)	3707.17	Z	H	-58.67	9.67	-49.00	70.91	34.91
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
9400 (0.218W)	3757.90	Z	H	-59.90	9.68	-50.22	73.60	36.38
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
9538 (0.288W)	3816.55	Y	H	-59.38	9.69	-49.69	74.29	37.60
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	

- Limit Calculation = $43 + 10 \log_{10} (\text{EIRP [W]})$ [dBc]

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

Effective Radiated Power Output Measurements by Substitution Method
according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT is placed on a wooden turn table 3-meters from the receive antenna. The receive antenna height and turntable rotation is adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. This spurious level is recorded. For readings above 1GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn and an isotropic or dipole antenna are taken into consideration.

This device was tested under all configurations and the highest power is reported in GSM mode and using a Power Control Level of "0" in the PCS Band and "5" in the Cellular Band.

This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.


The worst case data is reported.

7.9 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

7.9.1 FREQUENCY STABILITY (GSM850)

OPERATING FREQUENCY : 836,599,974 Hz
 CHANNEL : 190(Mid)
 REFERENCE VOLTAGE : 3.70 V DC
 DEVIATION LIMIT : ± 0.00025 % or 2.5 ppm


VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(ppm)	(%)
100%	3.700	+25(Ref)	836,599,974	0.000	0.00000000
100%		-30	836,599,977	0.004	0.00000036
100%		-20	836,599,975	0.001	0.00000012
100%		-10	836,599,981	0.008	0.00000084
100%		0	836,599,973	-0.001	-0.00000012
100%		+10	836,599,968	-0.007	-0.00000072
100%		+20	836,599,978	0.005	0.00000048
100%		+30	836,599,977	0.004	0.00000036
100%		+40	836,599,973	-0.001	-0.00000012
100%		+50	836,599,969	-0.006	-0.00000060
115%		4.255	+25	836,599,981	0.008
BATT.ENDPOINT	3.145	+25	836,599,976	0.002	0.00000024

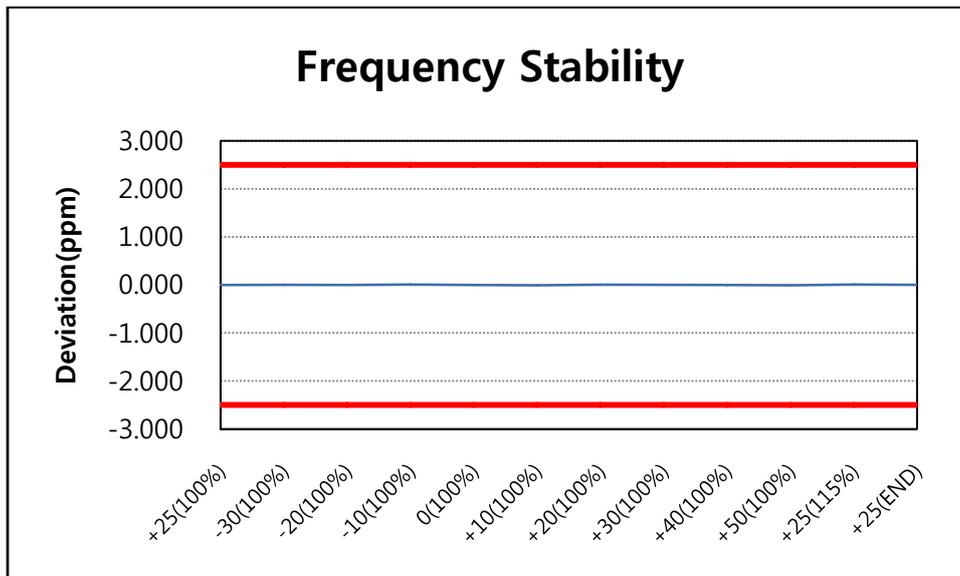

7.9.2 FREQUENCY STABILITY (WCDMA850)

OPERATING FREQUENCY : 836,600,011 Hz
 CHANNEL : 4183(Mid)
 REFERENCE VOLTAGE : 3.70 V DC
 DEVIATION LIMIT : ± 0.00025 % or 2.5 ppm


VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(ppm)	(%)
100%	3.700	+25(Ref)	836,600,011	0.000	0.00000000
100%		-30	836,599,983	-0.033	-0.00000335
100%		-20	836,599,985	-0.031	-0.00000311
100%		-10	836,599,987	-0.029	-0.00000287
100%		0	836,599,991	-0.024	-0.00000239
100%		+10	836,599,983	-0.033	-0.00000335
100%		+20	836,599,990	-0.025	-0.00000251
100%		+30	836,599,986	-0.030	-0.00000299
100%		+40	836,599,980	-0.037	-0.00000371
100%		+50	836,599,984	-0.032	-0.00000323
115%	4.255	+25	836,600,009	-0.002	-0.00000024
BATT.ENDPOINT	3.145	+25	836,600,007	-0.005	-0.00000048

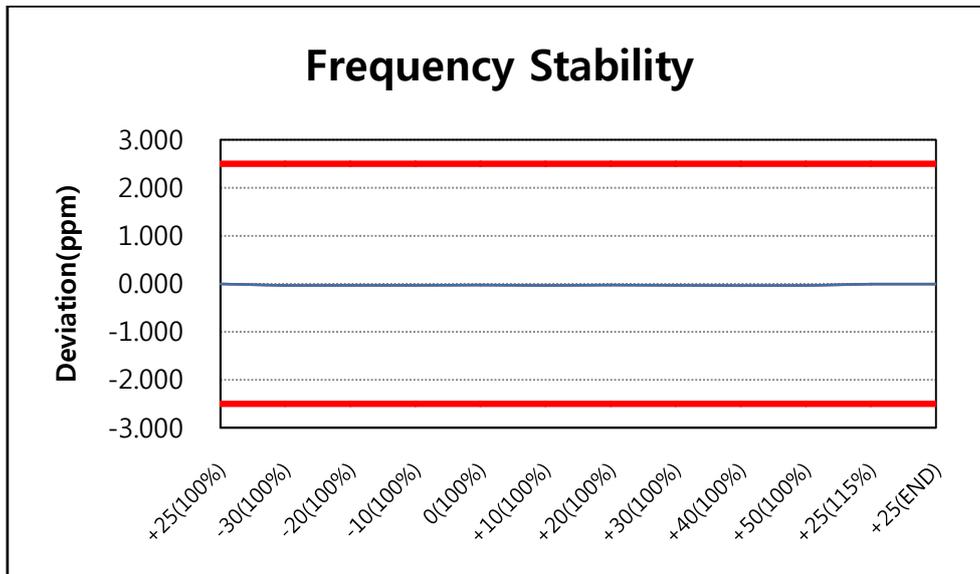

7.9.3 FREQUENCY STABILITY (GSM1900)

OPERATING FREQUENCY : 1,879,999,964 Hz
 CHANNEL : 661(Mid)
 REFERENCE VOLTAGE : 3.70 V DC
 DEVIATION LIMIT : ± 0.00025 % or 2.5 ppm


VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(ppm)	(%)
100%	3.700	+25(Ref)	1,879,999,964	0.000	0.00000000
100%		-30	1,879,999,954	-0.005	-0.00000053
100%		-20	1,879,999,956	-0.004	-0.00000043
100%		-10	1,879,999,953	-0.006	-0.00000059
100%		0	1,879,999,964	0.000	0.00000000
100%		+10	1,879,999,956	-0.004	-0.00000043
100%		+20	1,879,999,962	-0.001	-0.00000011
100%		+30	1,879,999,959	-0.003	-0.00000027
100%		+40	1,879,999,957	-0.004	-0.00000037
100%		+50	1,879,999,960	-0.002	-0.00000021
115%	4.255	+25	1,879,999,977	0.007	0.00000069
BATT.ENDPOINT	3.145	+25	1,879,999,969	0.003	0.00000027

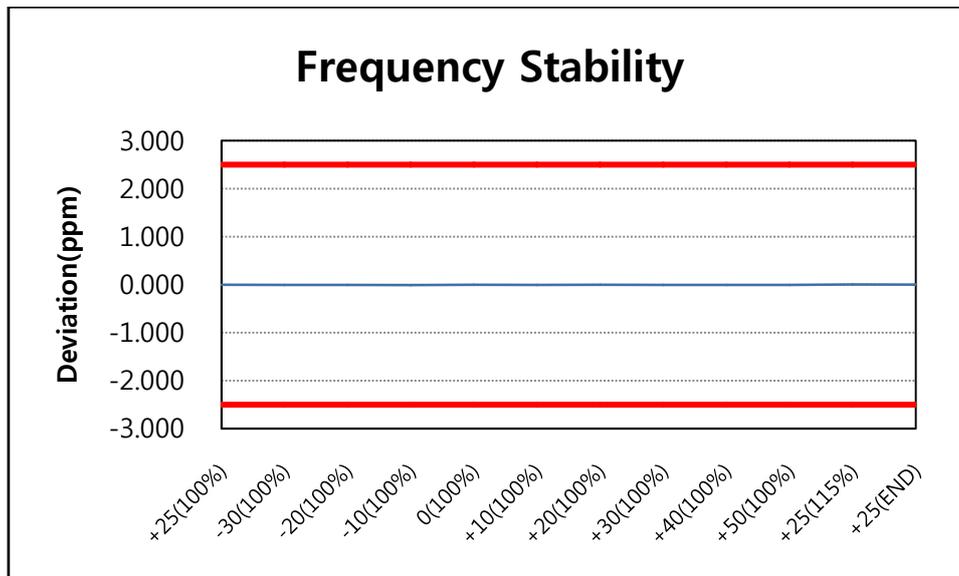

7.9.4 FREQUENCY STABILITY (WCDMA1900)

OPERATING FREQUENCY : 1,879,999,969 Hz
 CHANNEL : 9400(Mid)
 REFERENCE VOLTAGE : 3.70 V DC
 DEVIATION LIMIT : ± 0.00025 % or 2.5 ppm


VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(ppm)	(%)
100%	3.700	+25(Ref)	1,879,999,969	0.000	0.00000000
100%		-30	1,879,999,967	-0.001	-0.00000011
100%		-20	1,879,999,964	-0.003	-0.00000027
100%		-10	1,879,999,963	-0.003	-0.00000032
100%		0	1,879,999,981	0.006	0.00000064
100%		+10	1,880,000,022	0.028	0.00000282
100%		+20	1,879,999,967	-0.001	-0.00000011
100%		+30	1,879,999,965	-0.002	-0.00000021
100%		+40	1,879,999,969	0.000	0.00000000
100%		+50	1,879,999,959	-0.005	-0.00000053
115%	4.255	+25	1,879,999,962	-0.004	-0.00000037
BATT.ENDPOINT	3.145	+25	1,879,999,959	-0.005	-0.00000053

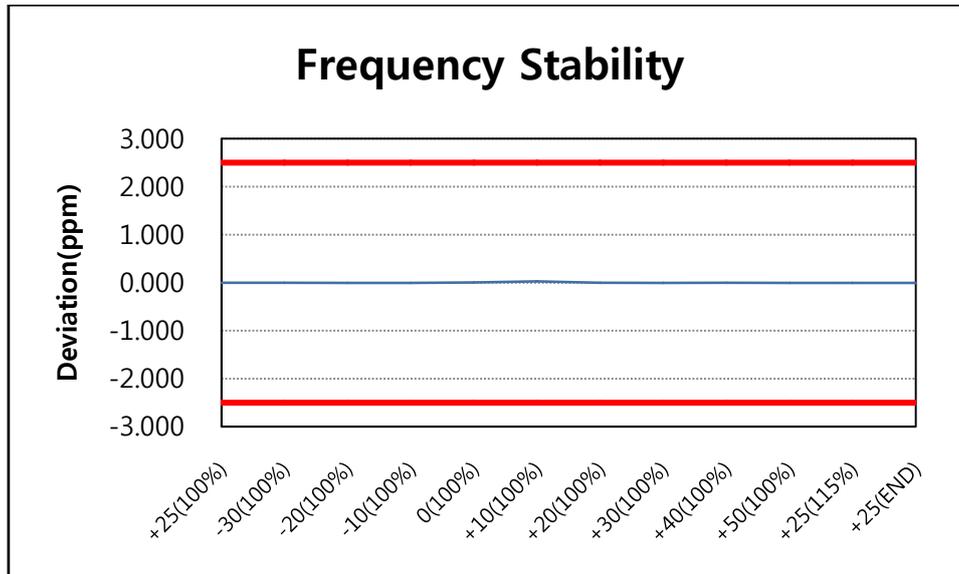

8. TEST PLOTS

Peak to Average Ratio

GSM1900 & Channel: 512

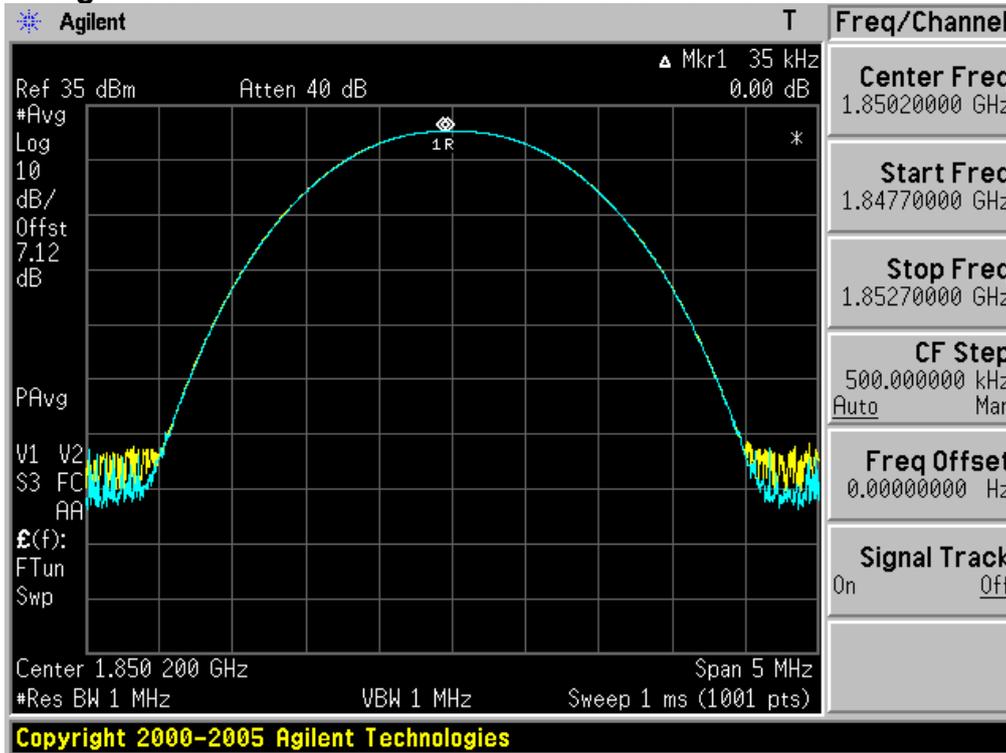


Peak to Average Ratio

WCDMA1900 & Channel: 9400




Occupied Bandwidth 99 % Bandwidth GSM850 & Channel: 128

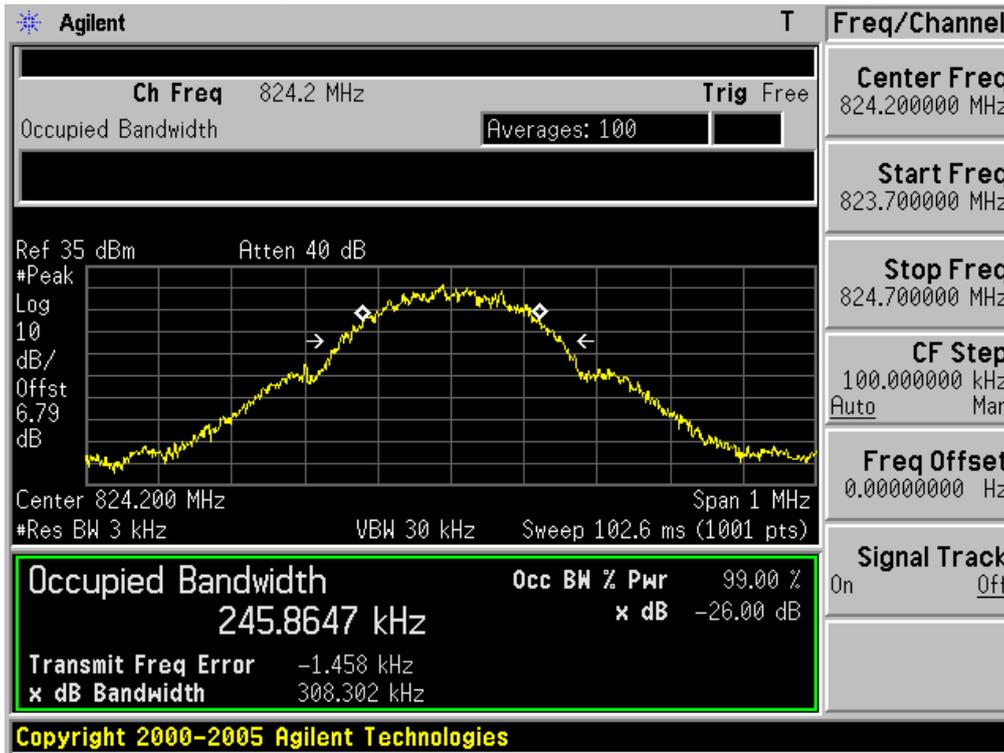


Occupied Bandwidth 99 % Bandwidth GSM850 & Channel: 190




Occupied Bandwidth 99 % Bandwidth GSM850 & Channel: 251

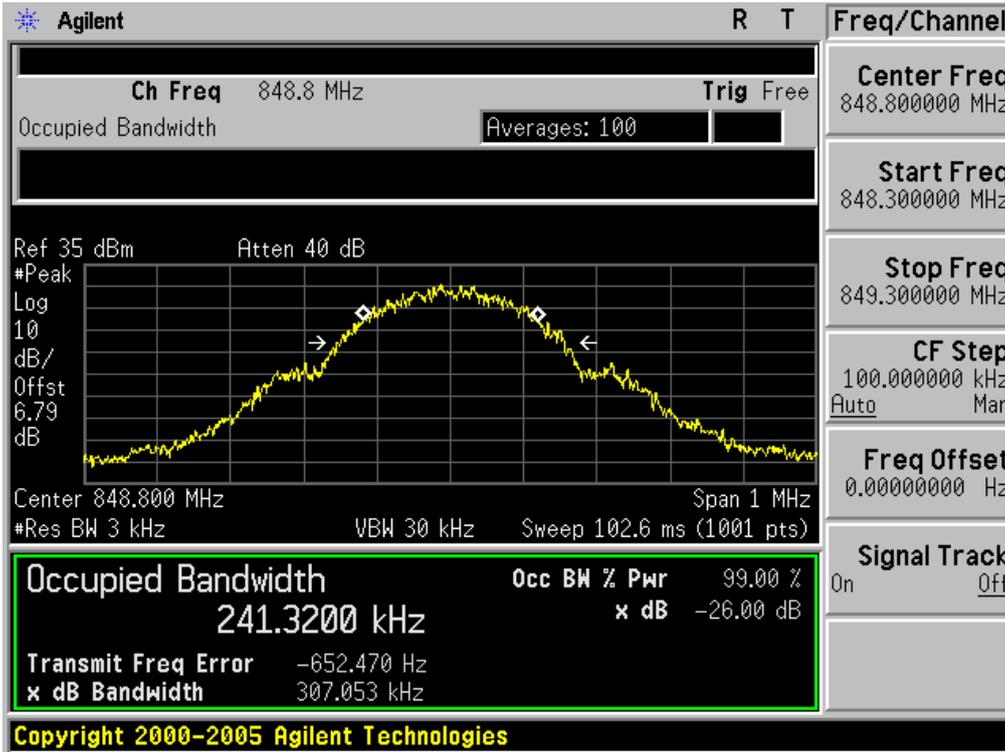


Occupied Bandwidth 99 % Bandwidth GSM 1900 & Channel: 512

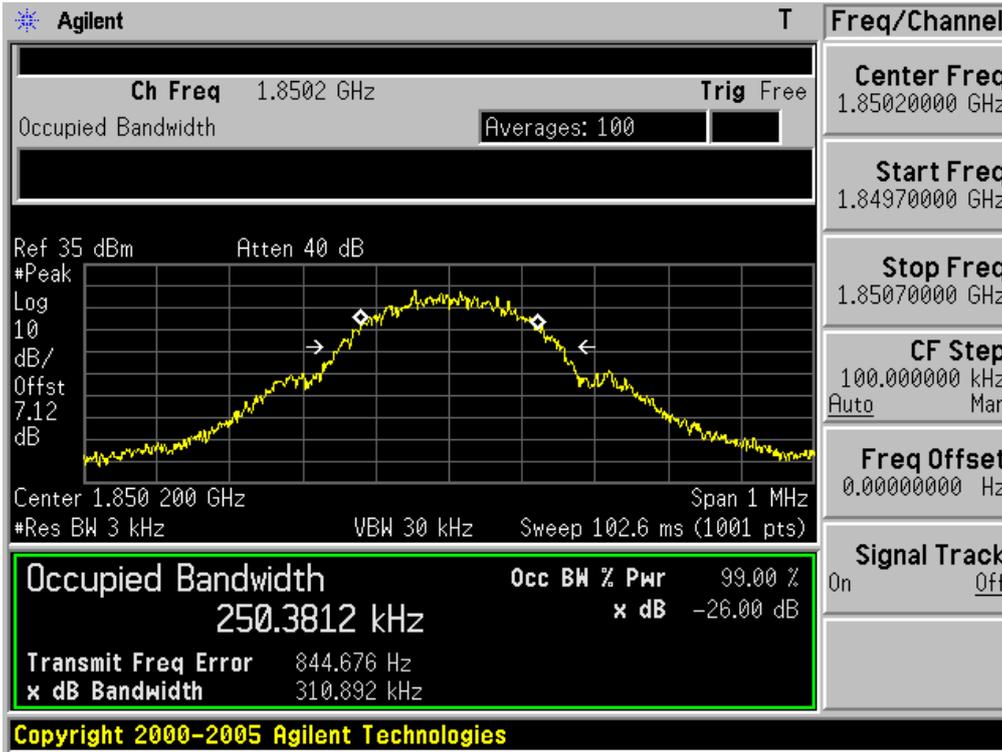


Occupied Bandwidth 99 % Bandwidth GSM 1900 & Channel: 661

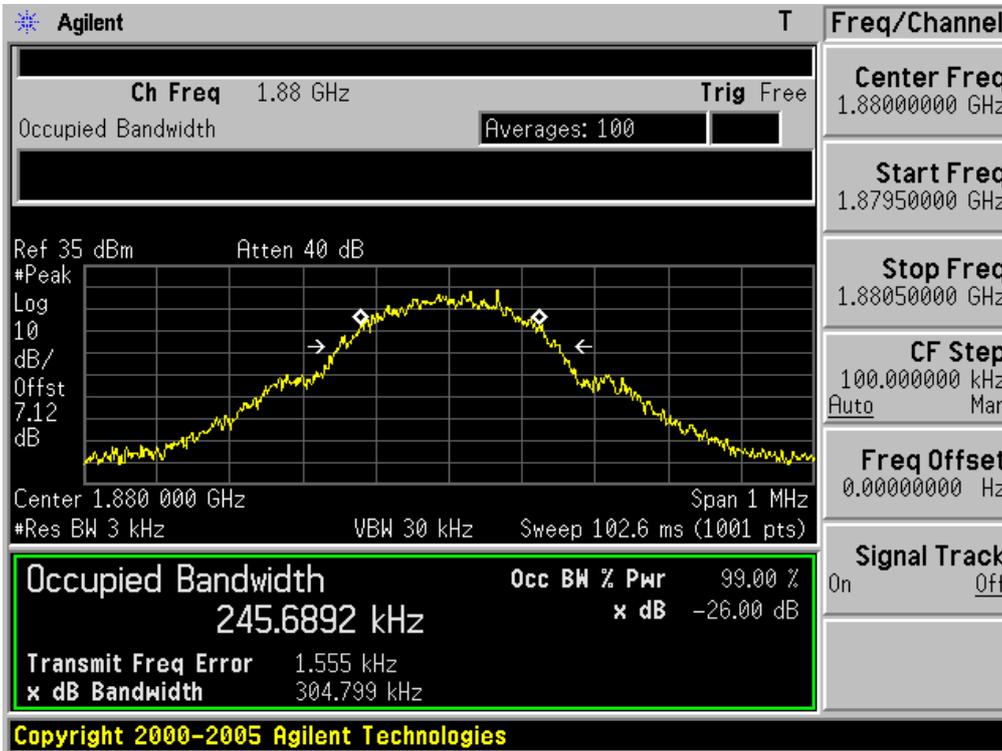


Occupied Bandwidth 99 % Bandwidth GSM 1900 & Channel: 810

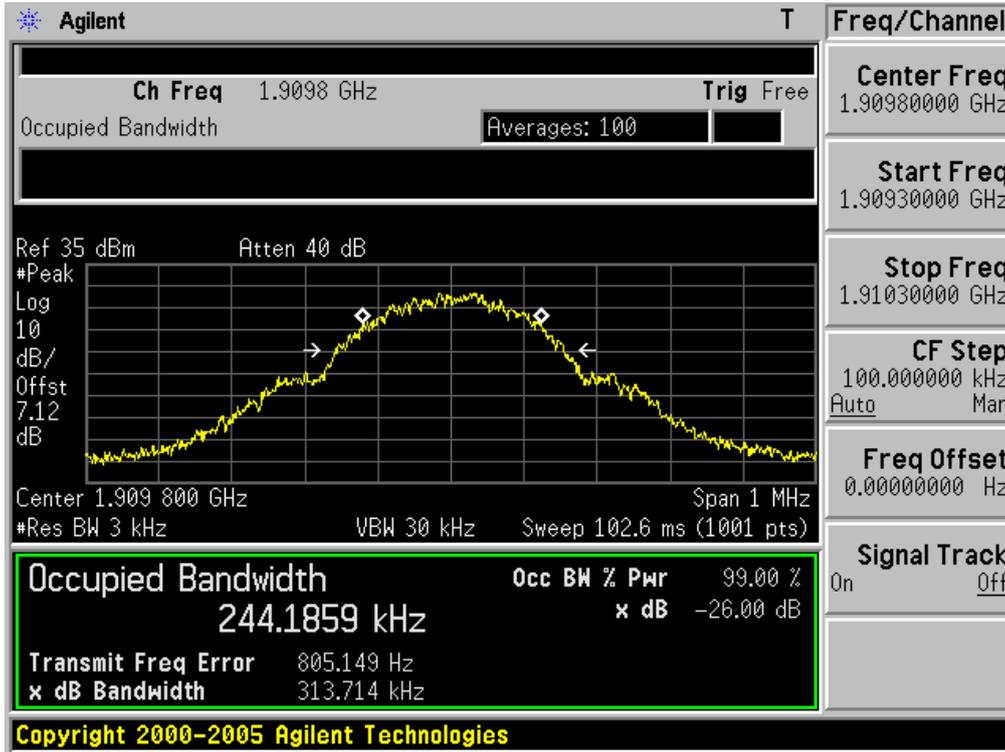


Occupied Bandwidth 99 % Bandwidth **EDGE 850** & **Channel: 128**

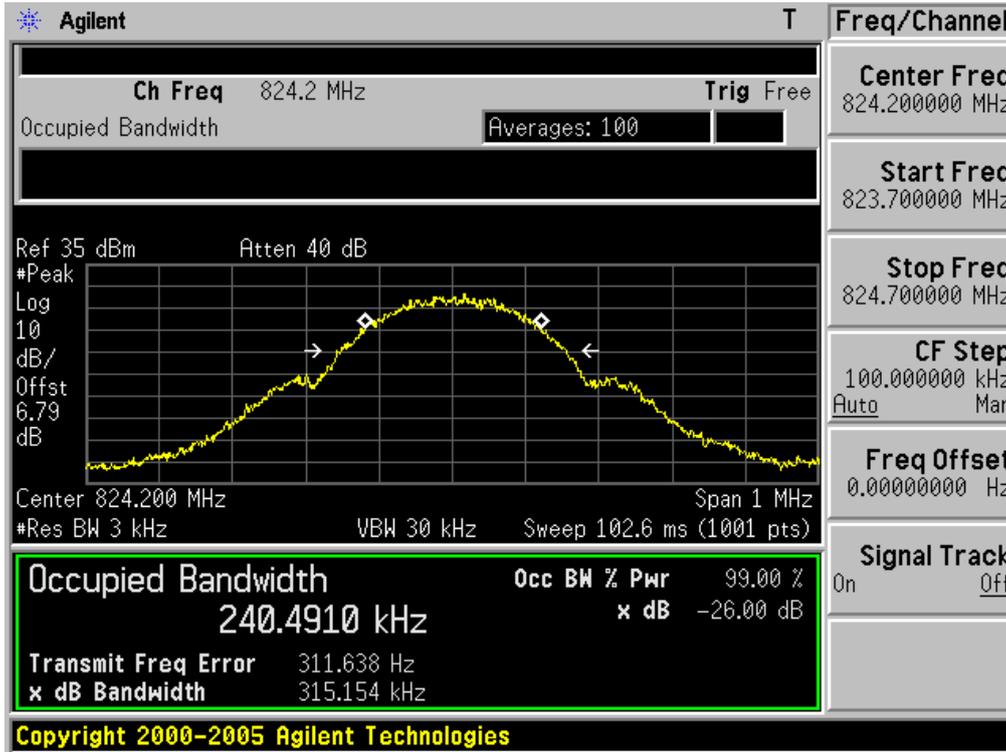


Occupied Bandwidth 99 % Bandwidth **EDGE 850** & **Channel: 190**

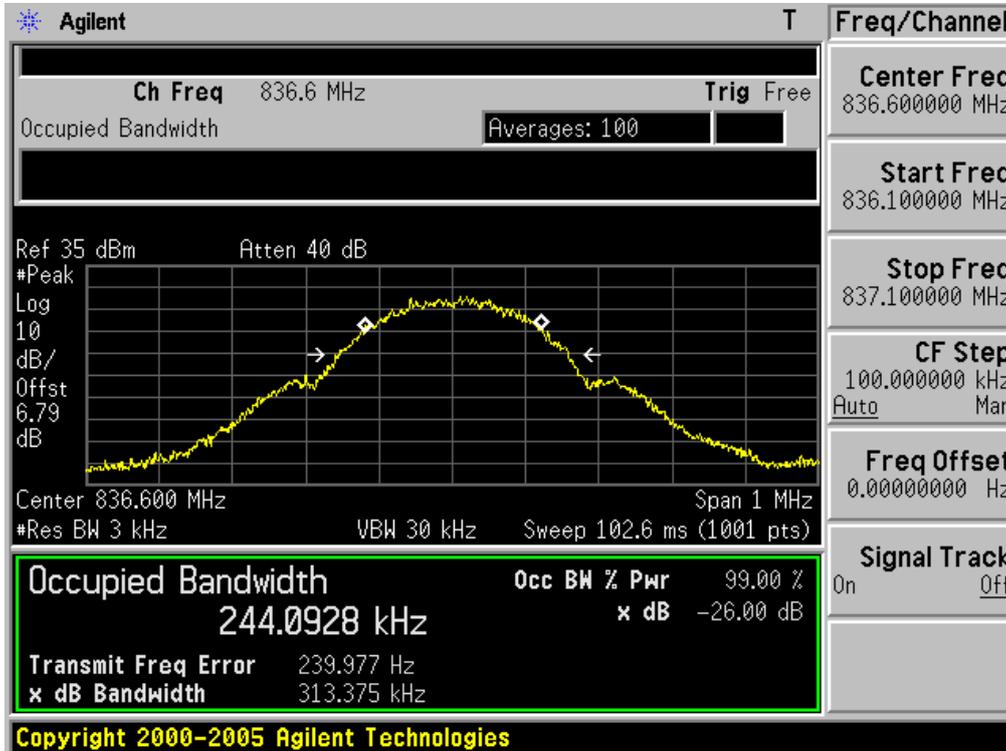


Occupied Bandwidth 99 % Bandwidth EDGE 850 & Channel: 251

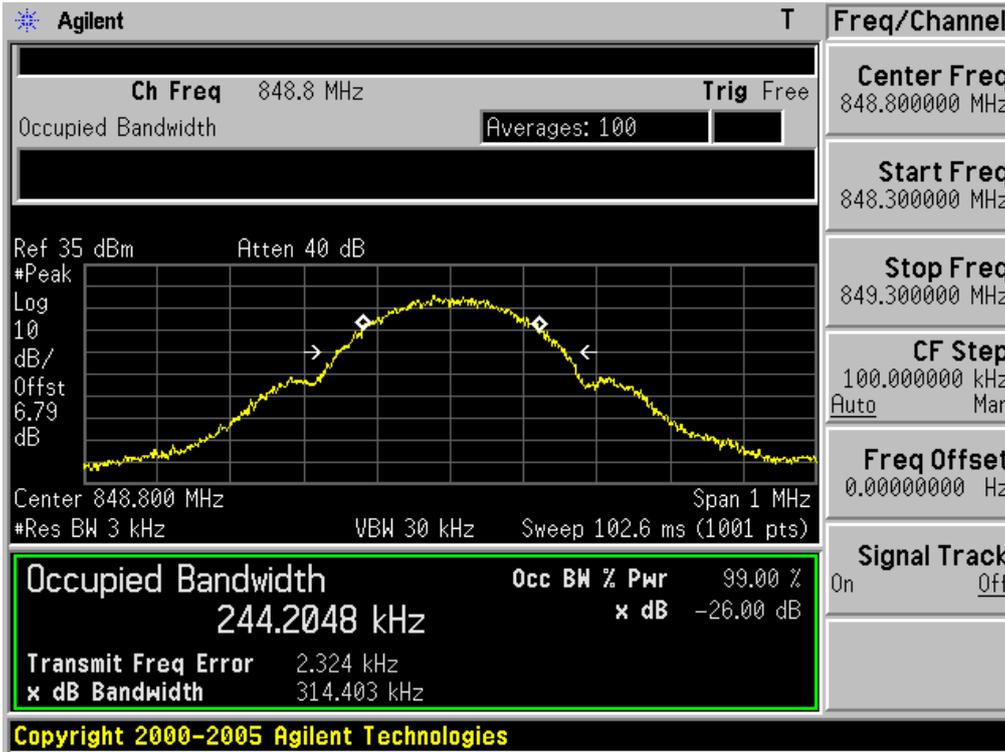


Occupied Bandwidth 99 % Bandwidth **EDGE 1900** & **Channel: 512**

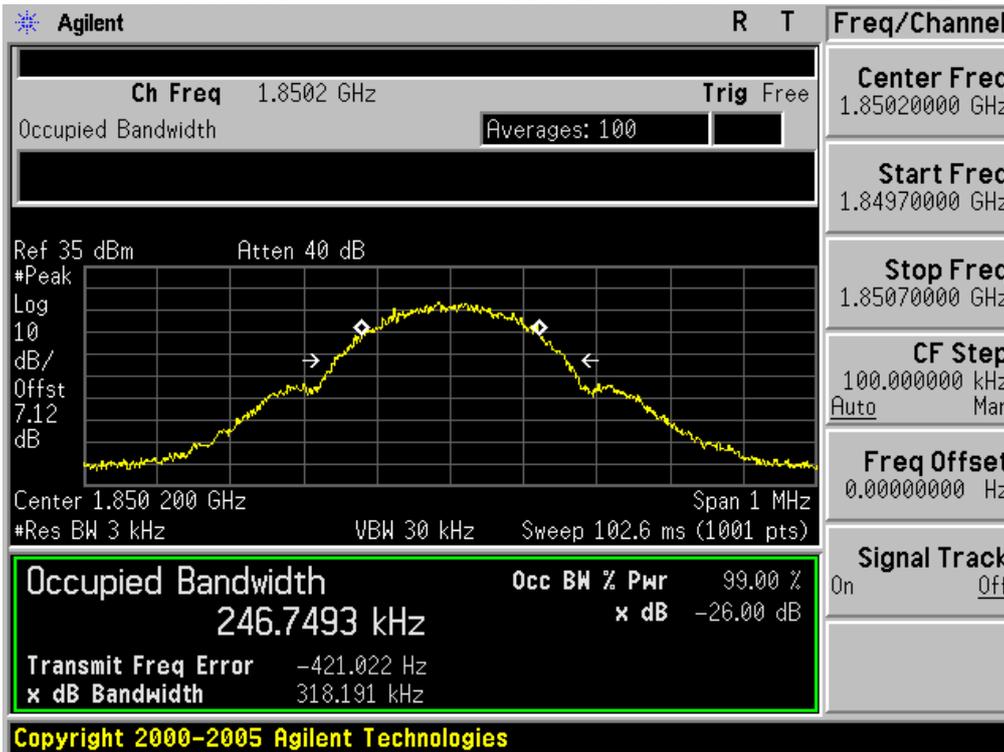


Occupied Bandwidth 99 % Bandwidth **EDGE 1900** & **Channel: 661**

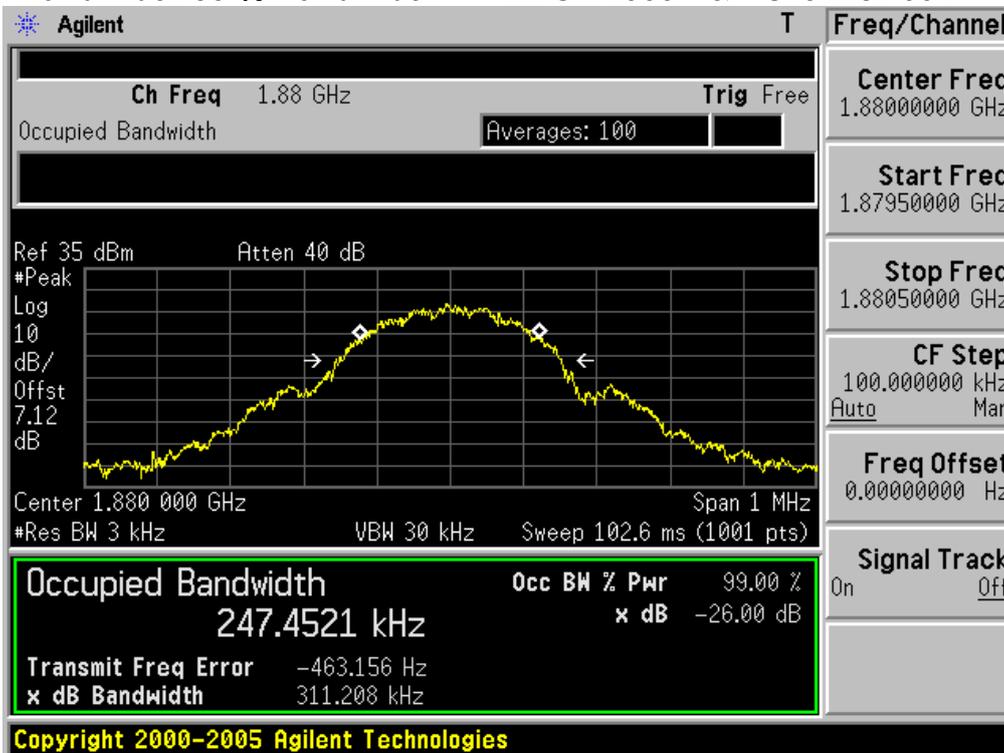


Occupied Bandwidth 99 % Bandwidth EDGE 1900 & Channel: 810

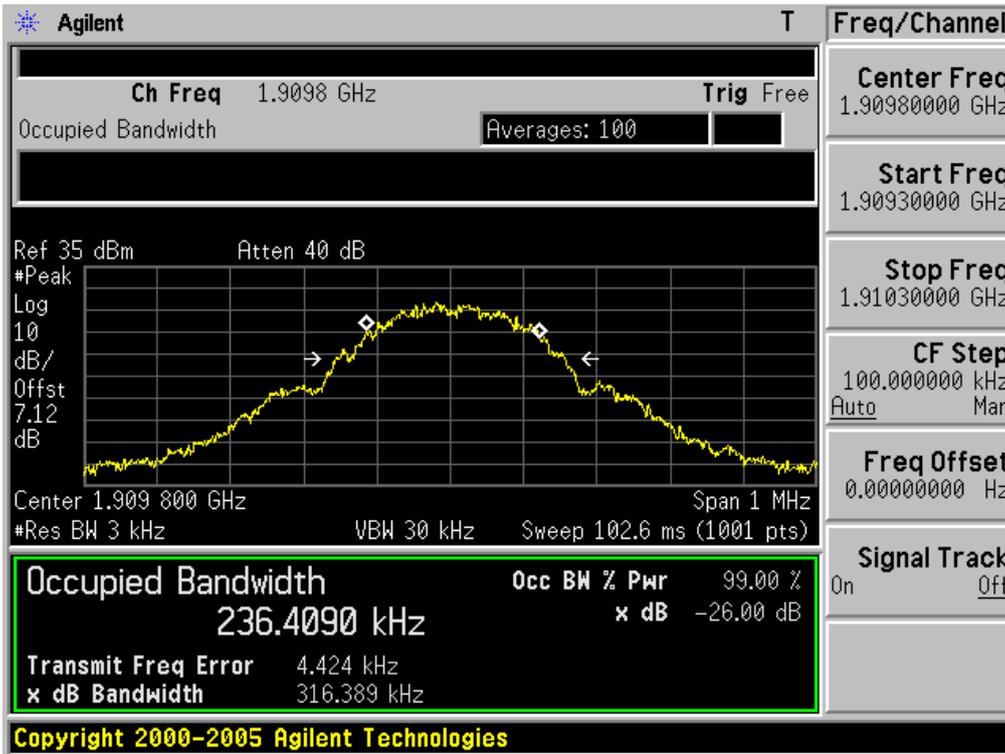


Occupied Bandwidth 99 % Bandwidth WCDMA850 & Channel: 4132

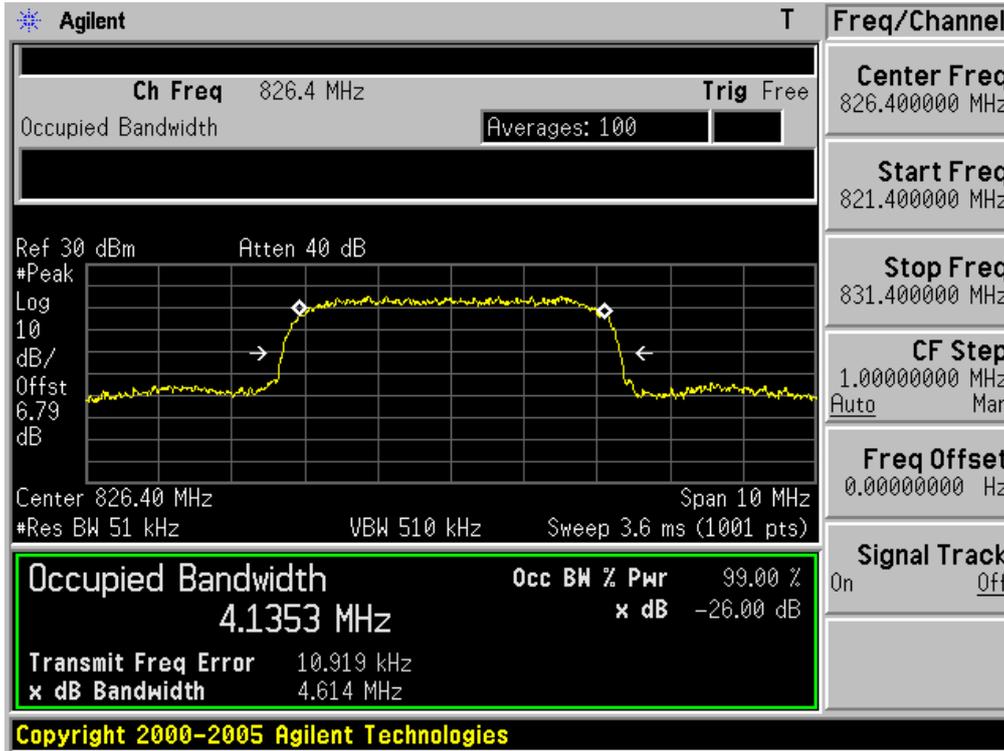


Occupied Bandwidth 99 % Bandwidth WCDMA850 & Channel: 4183

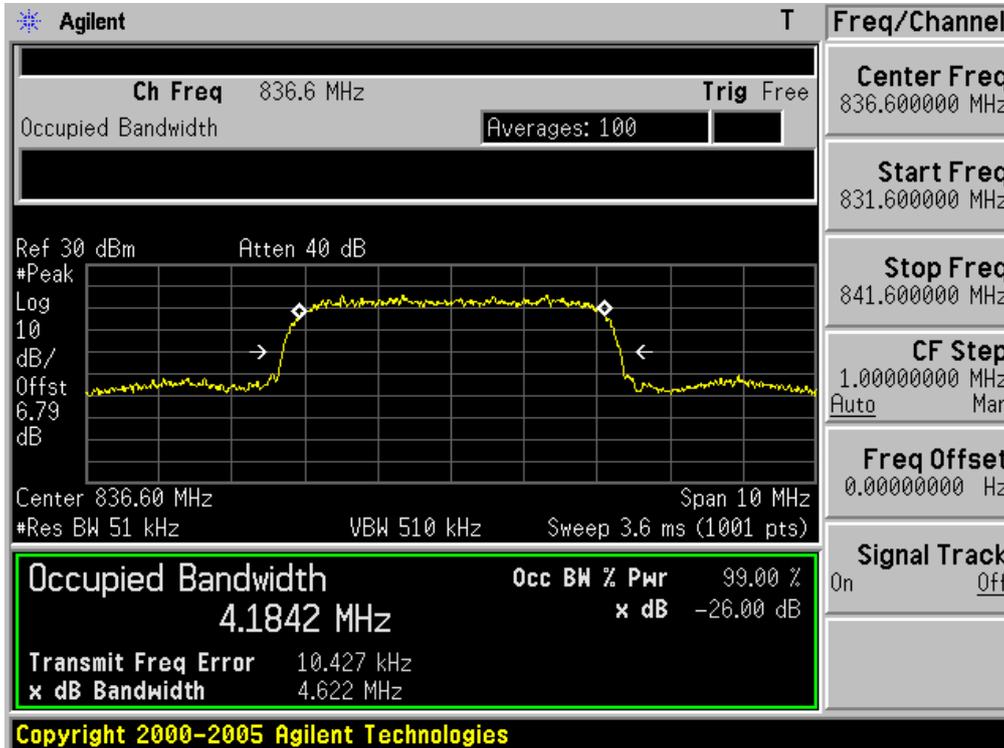


Occupied Bandwidth 99 % Bandwidth WCDMA850 & Channel: 4233

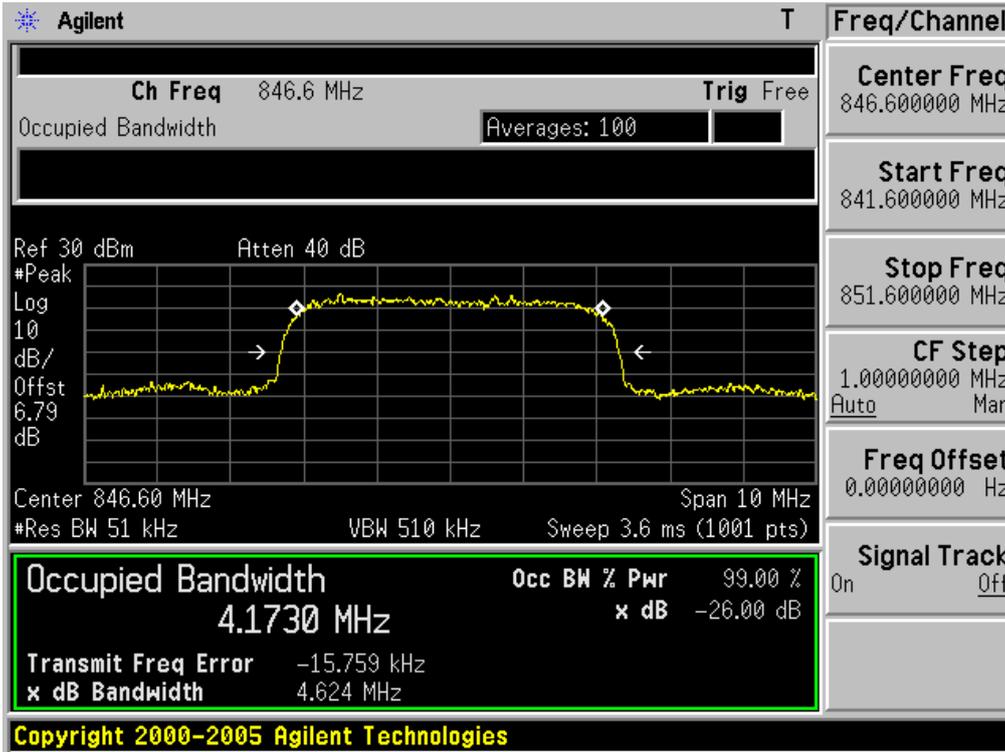


Occupied Bandwidth 99 % Bandwidth WCDMA1900 & Channel: 9262

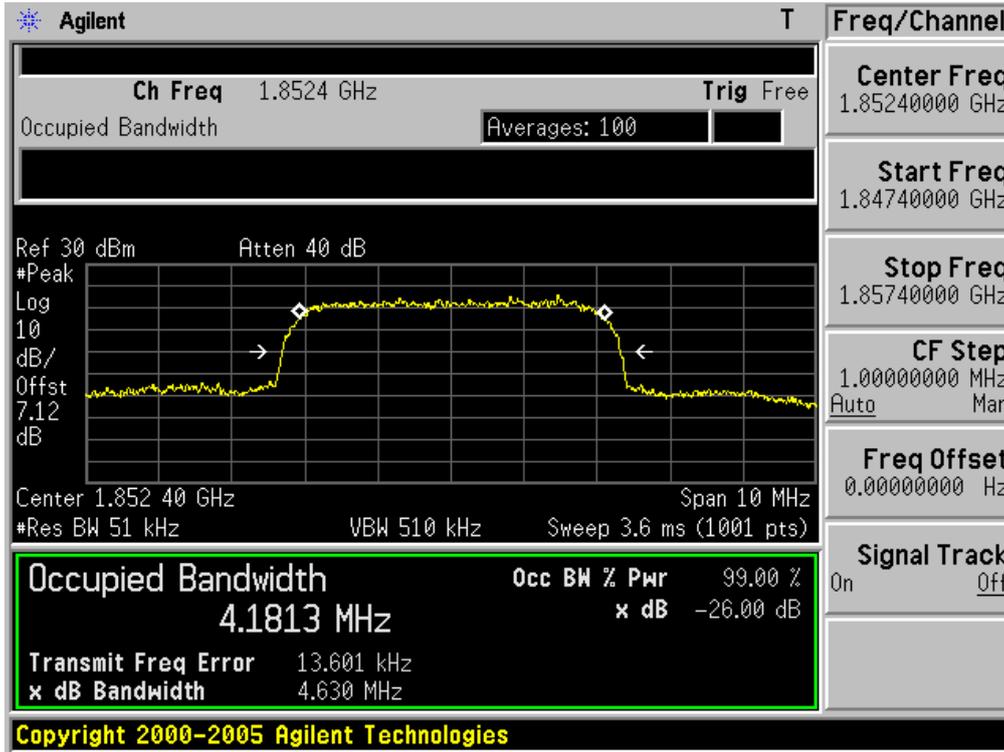


Occupied Bandwidth 99 % Bandwidth WCDMA1900 & Channel: 9400

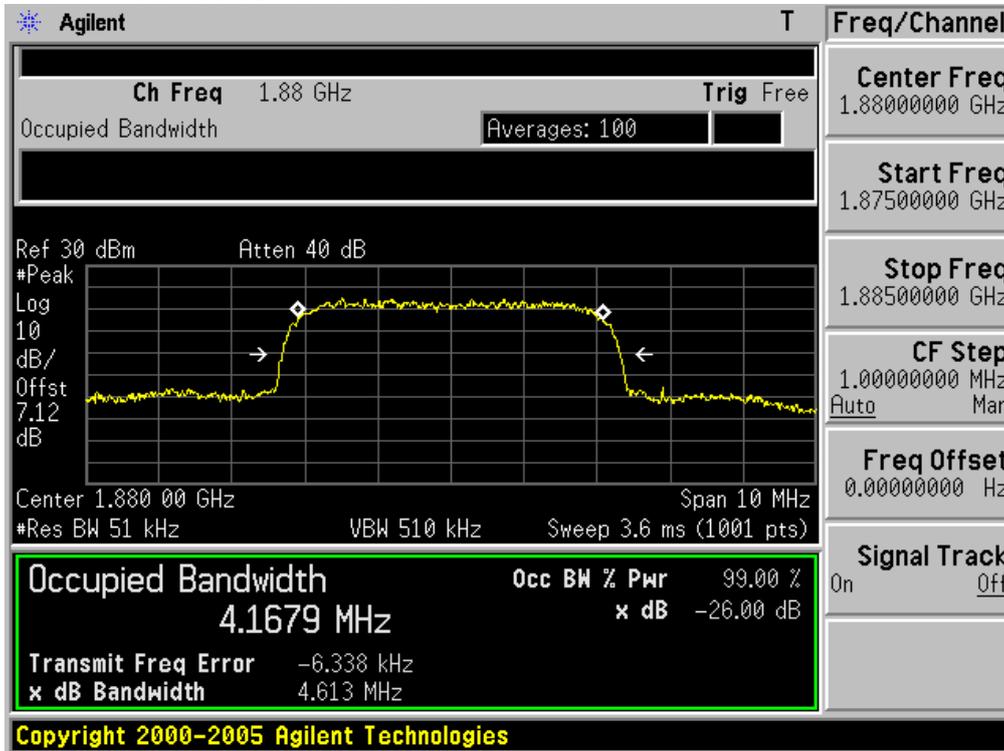


Occupied Bandwidth 99 % Bandwidth WCDMA1900 & Channel: 9538

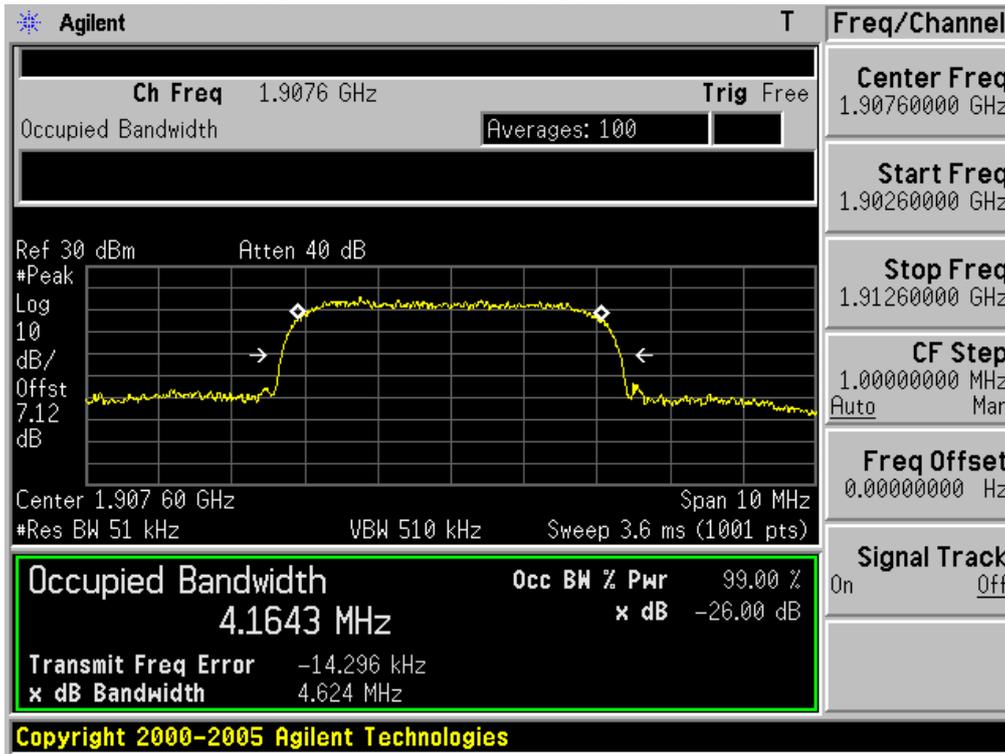


Spurious Emissions at Antenna Terminal GSM850 & Channel: 128

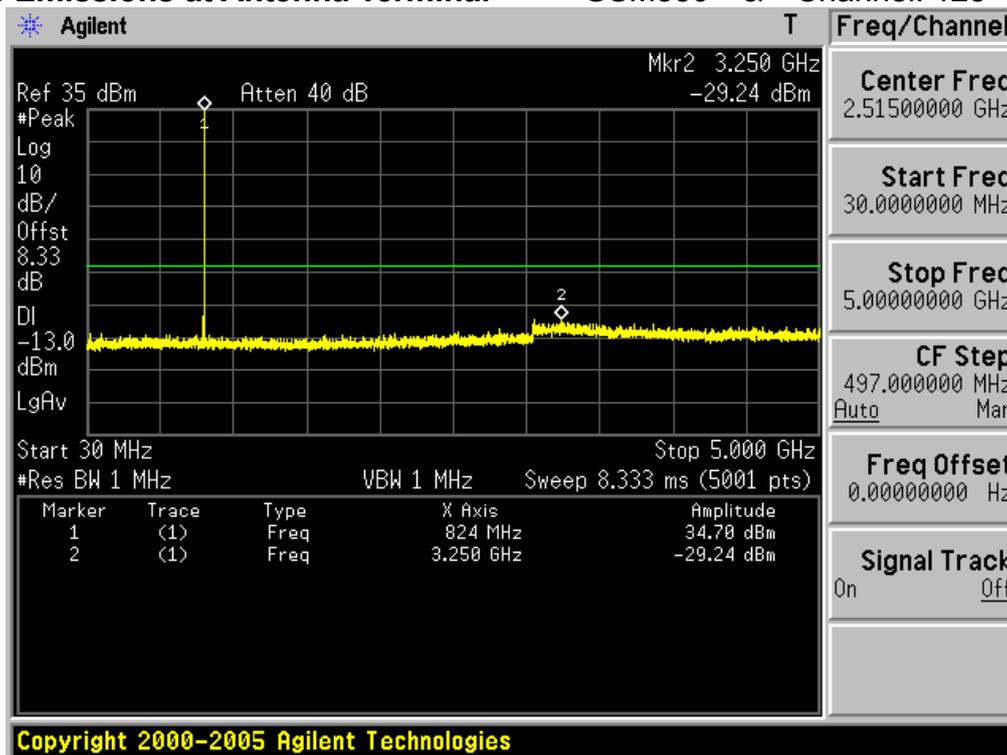


Spurious Emissions at Antenna Terminal GSM850 & Channel: 128

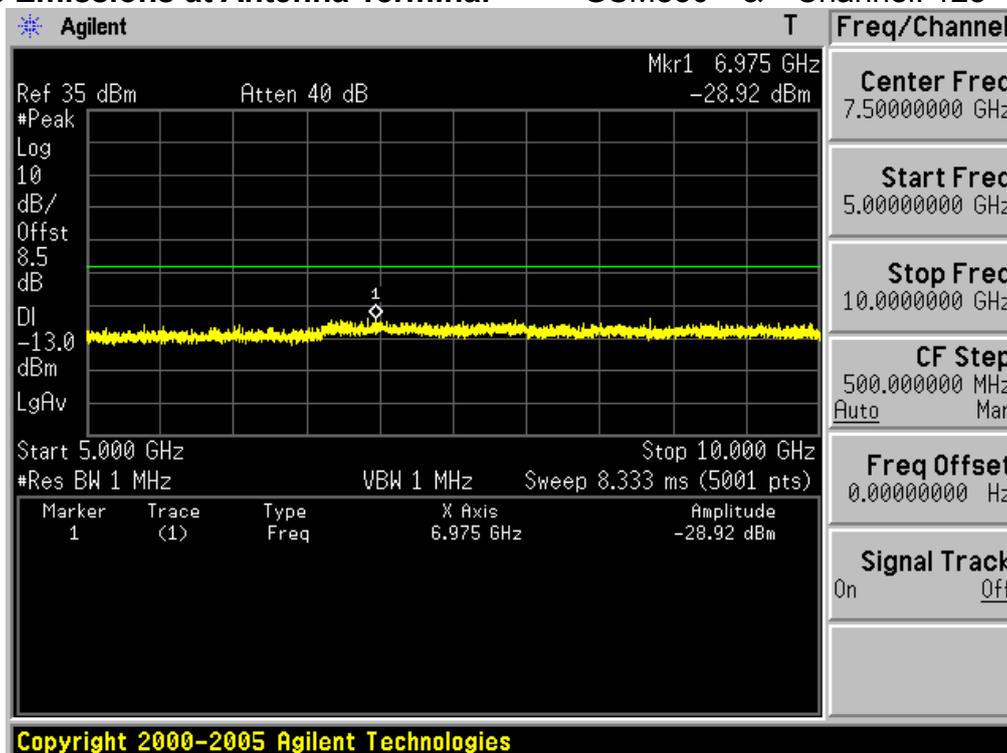


Spurious Emissions at Antenna Terminal GSM850 & Channel: 190

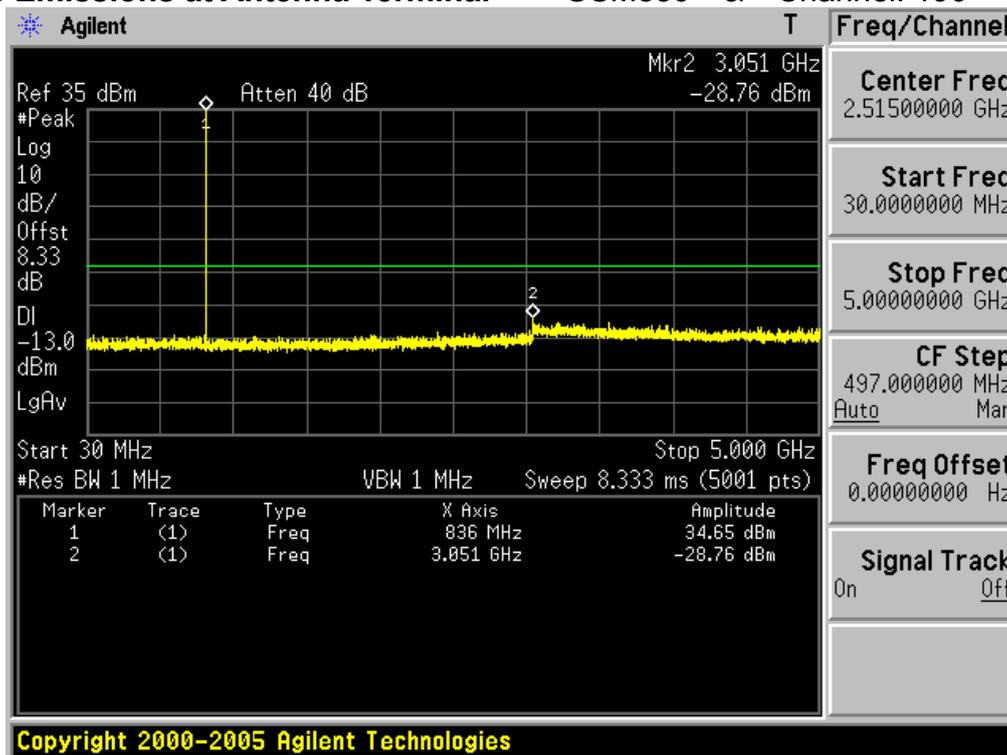


Spurious Emissions at Antenna Terminal GSM850 & Channel: 190

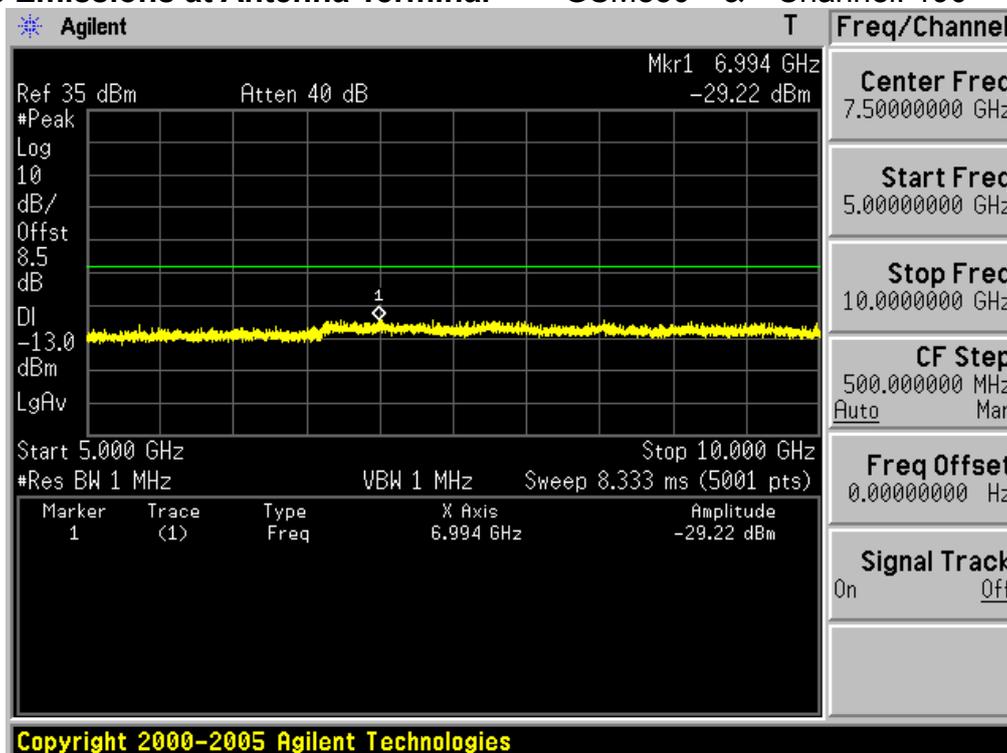


Spurious Emissions at Antenna Terminal GSM850 & Channel: 251

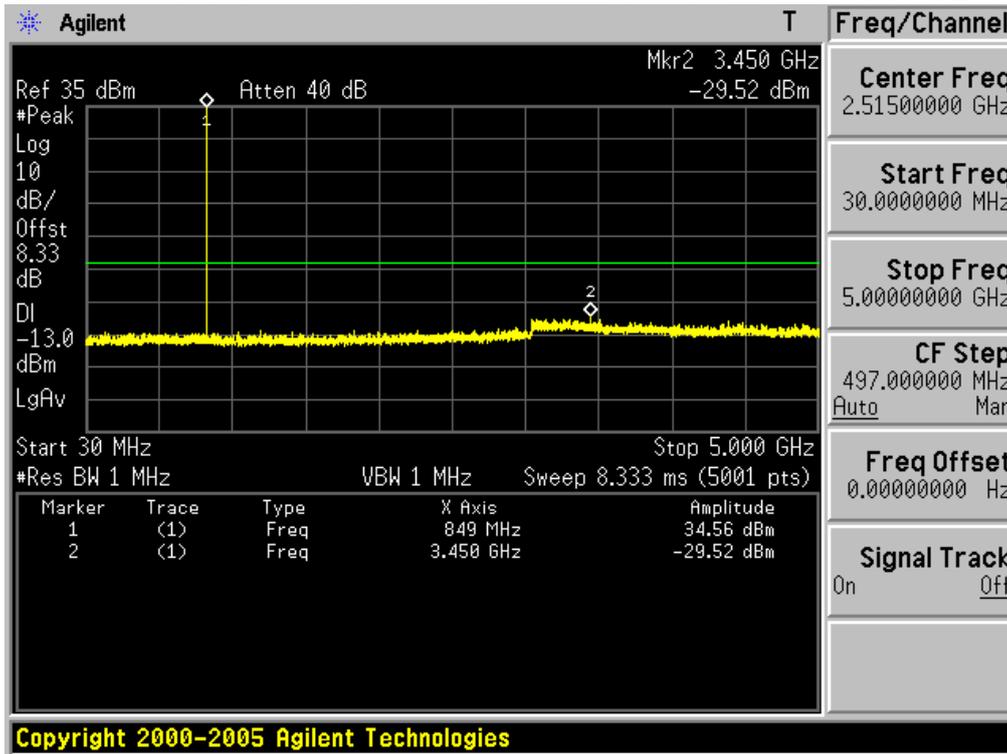


Spurious Emissions at Antenna Terminal GSM850 & Channel: 251

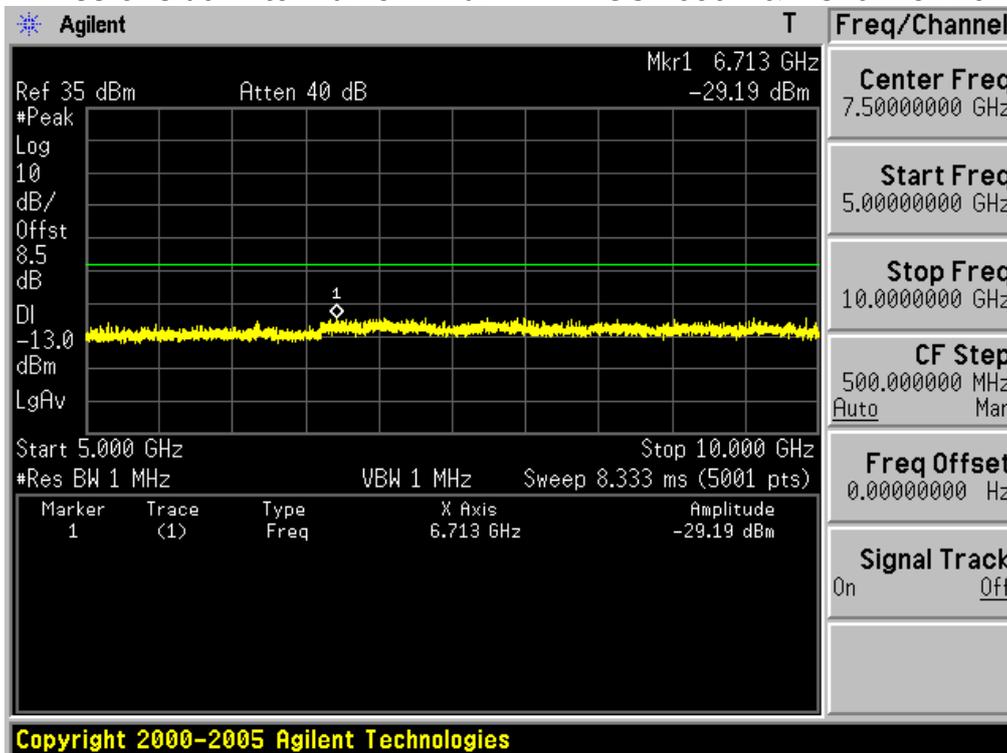


Spurious Emissions at Antenna Terminal **PCS1900 & Channel: 512**

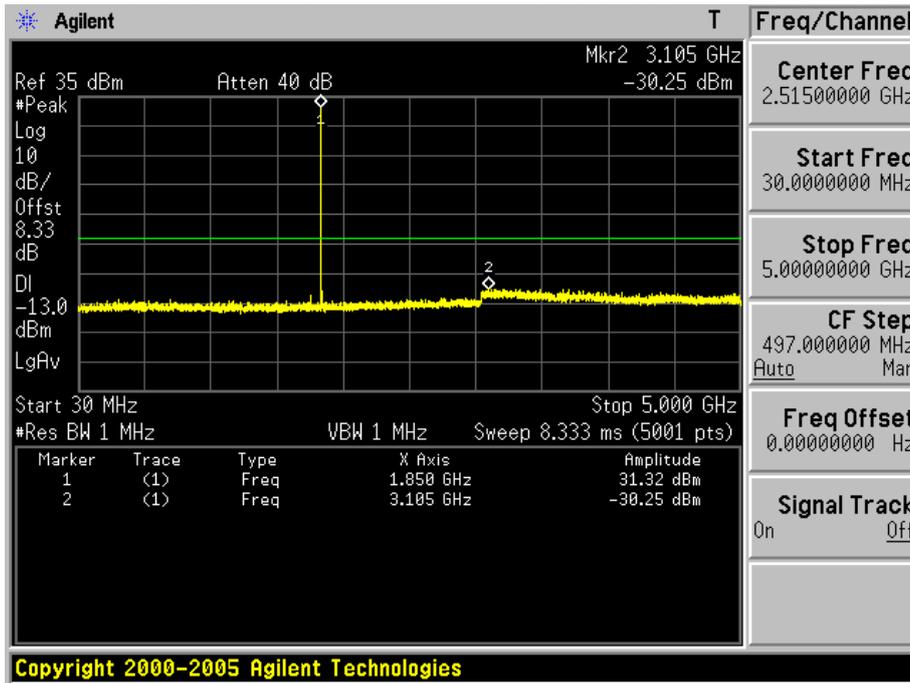


Spurious Emissions at Antenna Terminal **PCS1900 & Channel: 512**

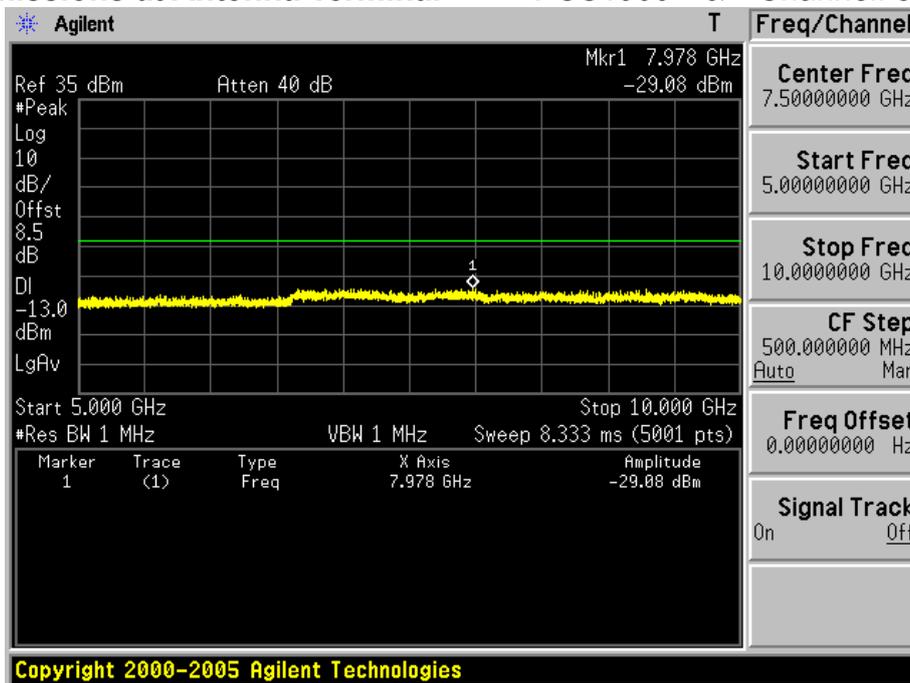


Spurious Emissions at Antenna Terminal **PCS1900 & Channel: 512**

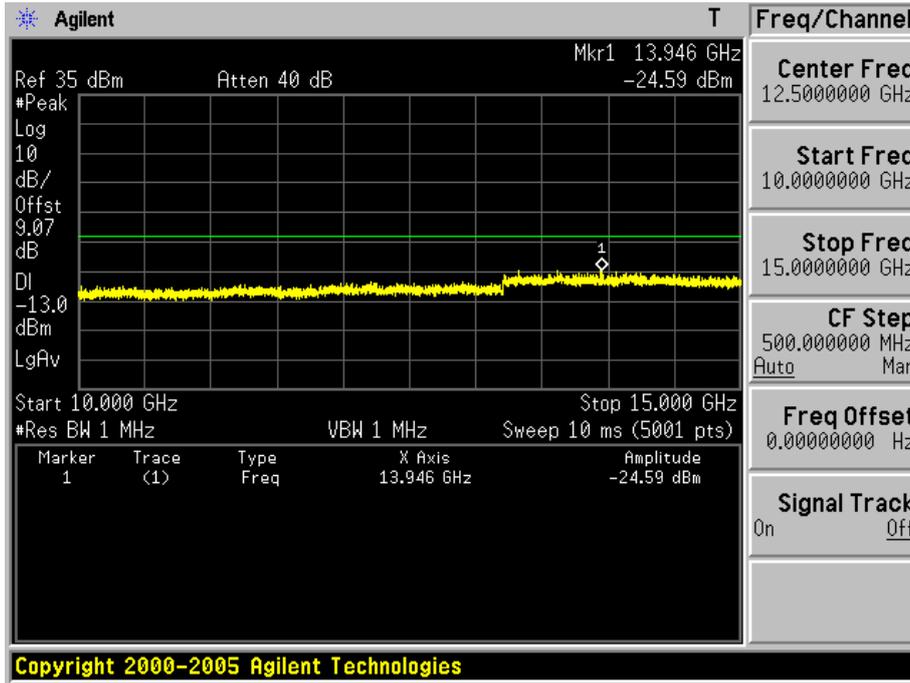

Spurious Emissions at Antenna Terminal **PCS1900 & Channel: 512**

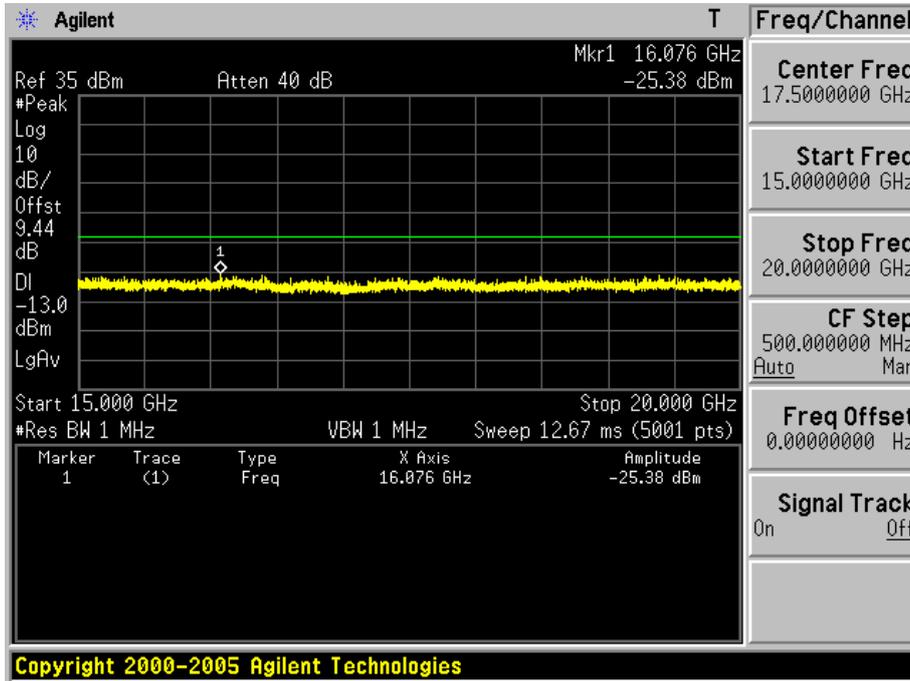


Spurious Emissions at Antenna Terminal **PCS1900 & Channel: 661**

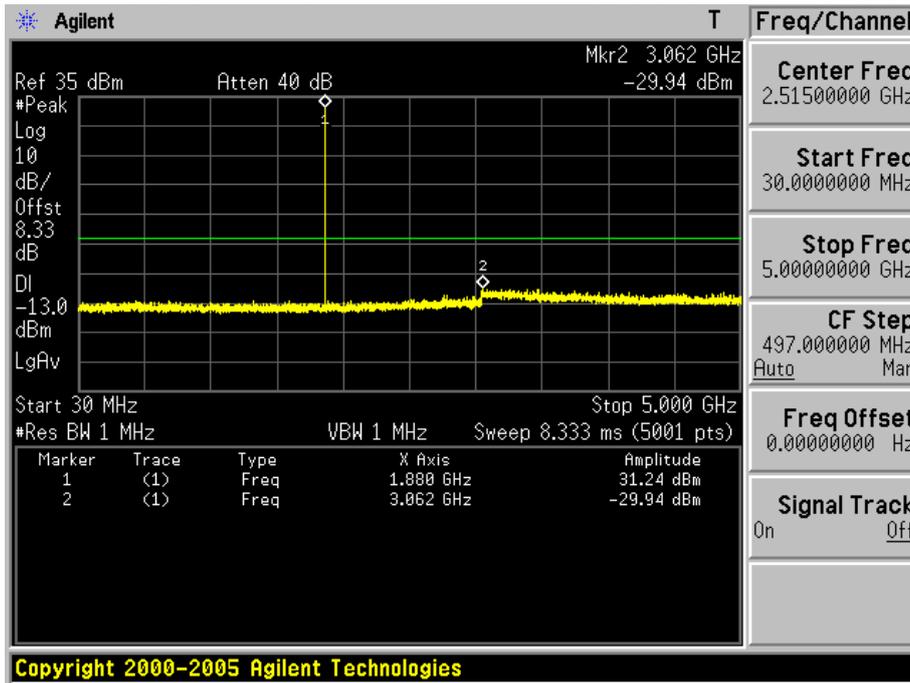

Freq/Channel
Center Freq 2.51500000 GHz
Start Freq 30.0000000 MHz
Stop Freq 5.00000000 GHz
CF Step 497.000000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off


Spurious Emissions at Antenna Terminal **PCS1900 & Channel: 661**

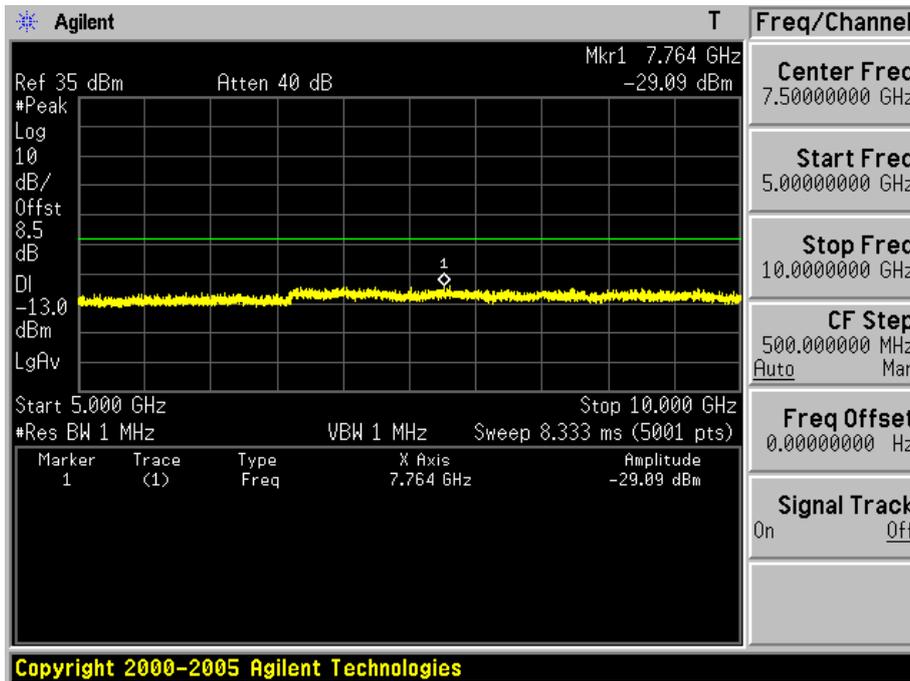

Freq/Channel
Center Freq 7.50000000 GHz
Start Freq 5.00000000 GHz
Stop Freq 10.0000000 GHz
CF Step 500.000000 MHz Auto Man
Freq Offset 0.00000000 Hz
Signal Track On Off


Spurious Emissions at Antenna Terminal

PCS1900 & Channel: 661

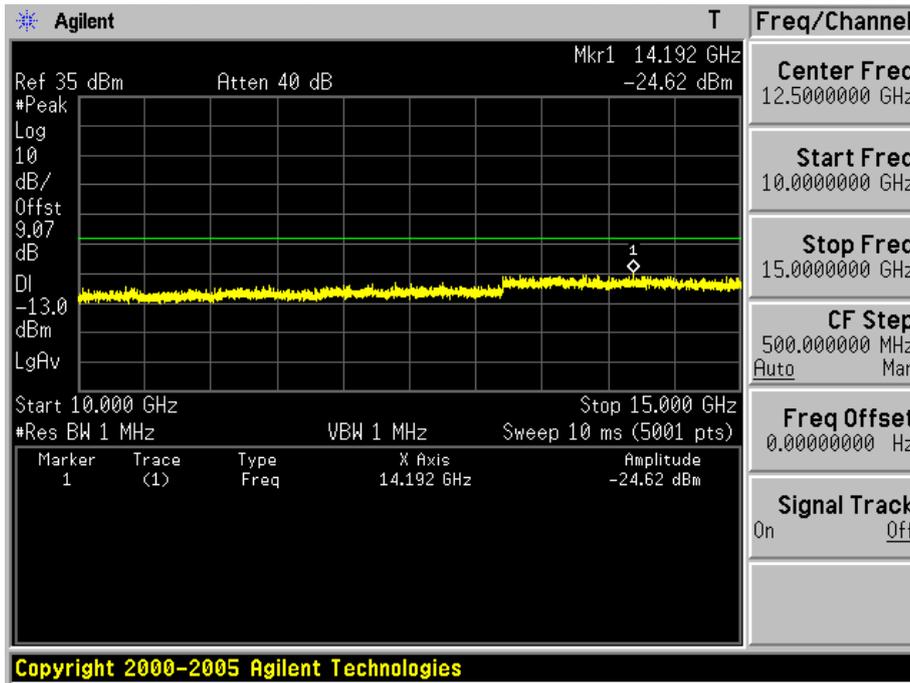


Spurious Emissions at Antenna Terminal


PCS1900 & Channel: 661

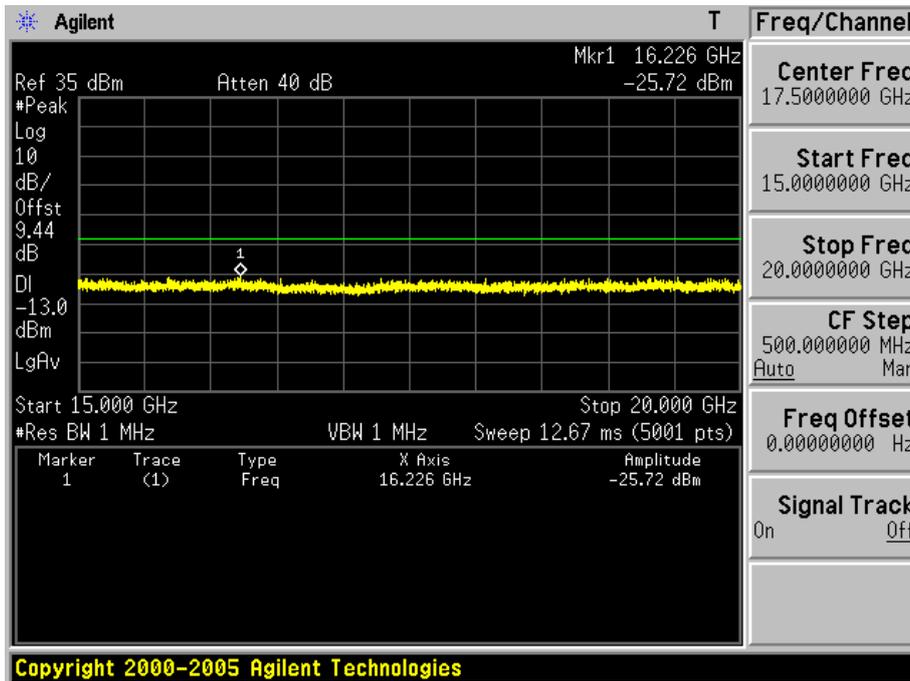


Spurious Emissions at Antenna Terminal **PCS1900 & Channel: 810**

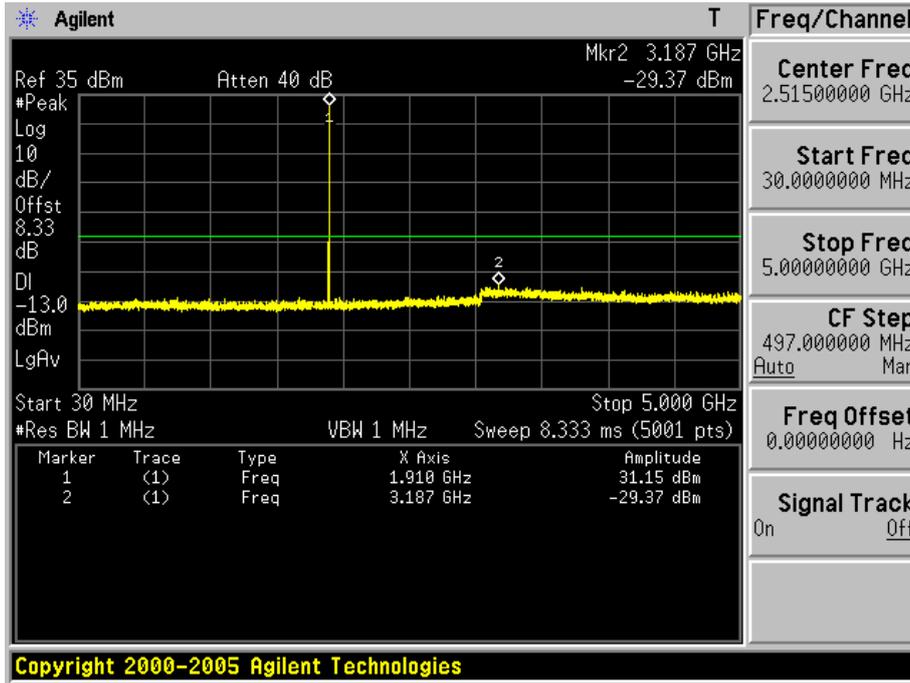


Spurious Emissions at Antenna Terminal **PCS1900 & Channel: 810**

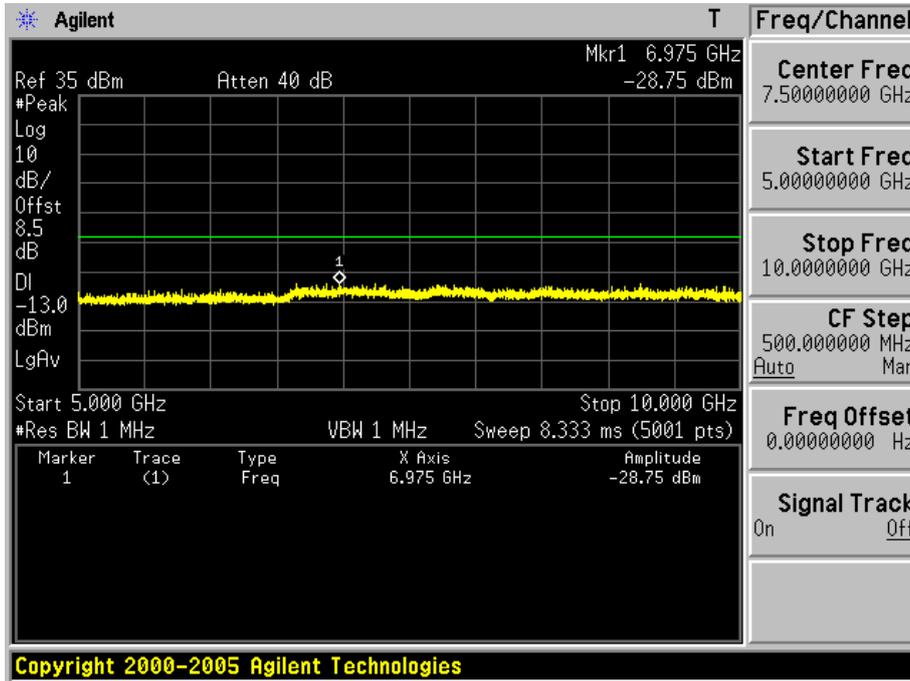


Spurious Emissions at Antenna Terminal PCS1900 & Channel: 810

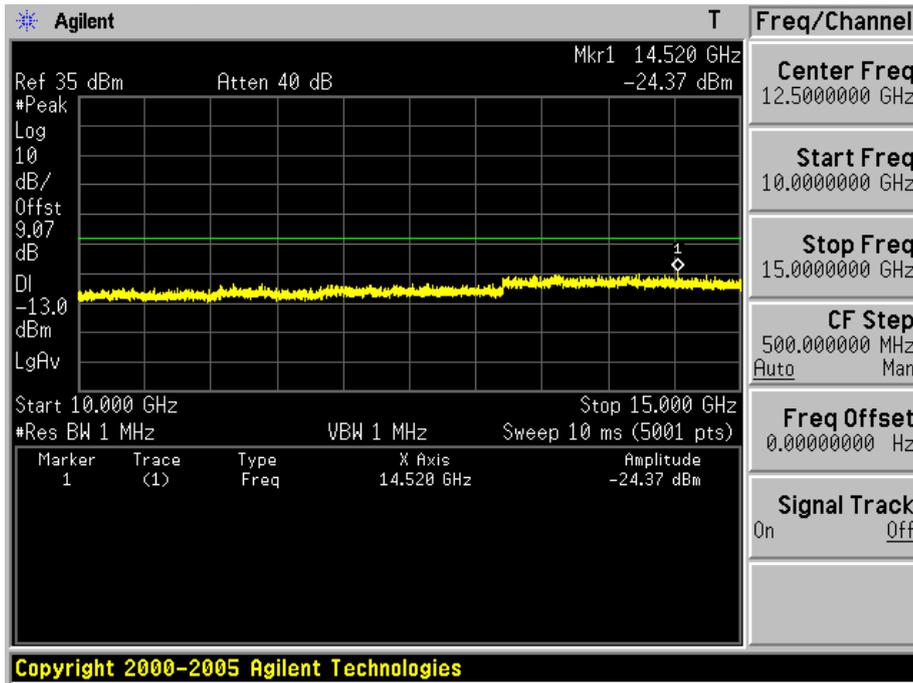


Spurious Emissions at Antenna Terminal PCS1900 & Channel: 810

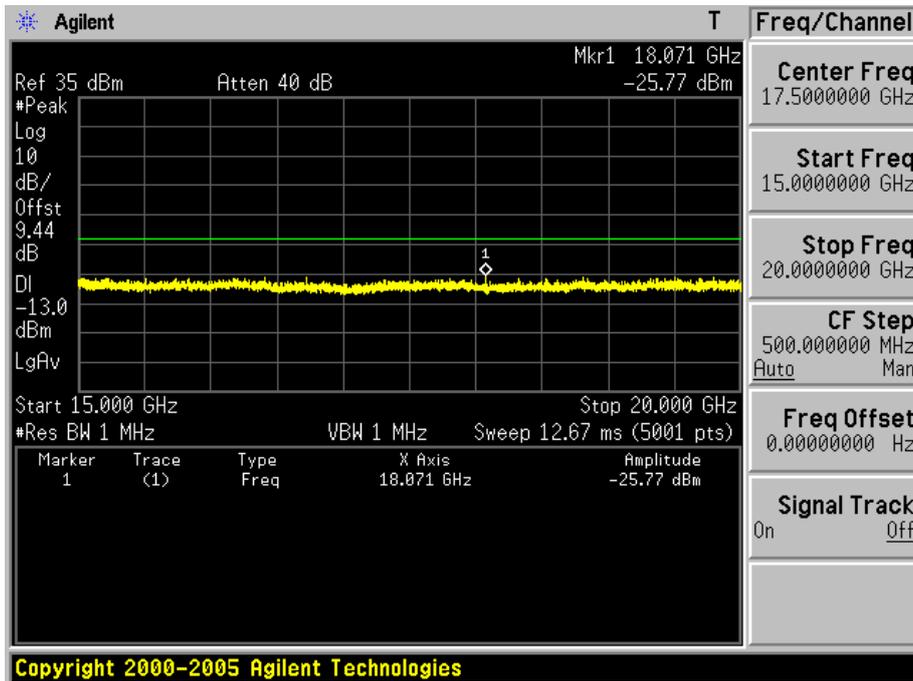


Spurious Emissions at Antenna Terminal WCDMA850 & Channel: 4132

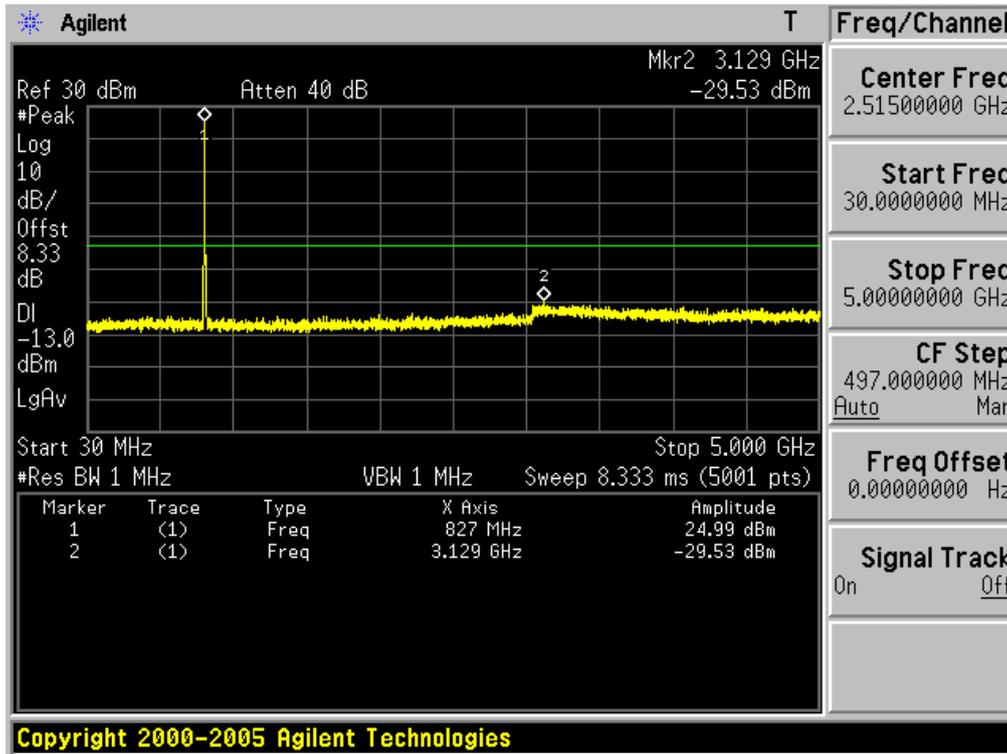


Spurious Emissions at Antenna Terminal WCDMA850 & Channel: 4132

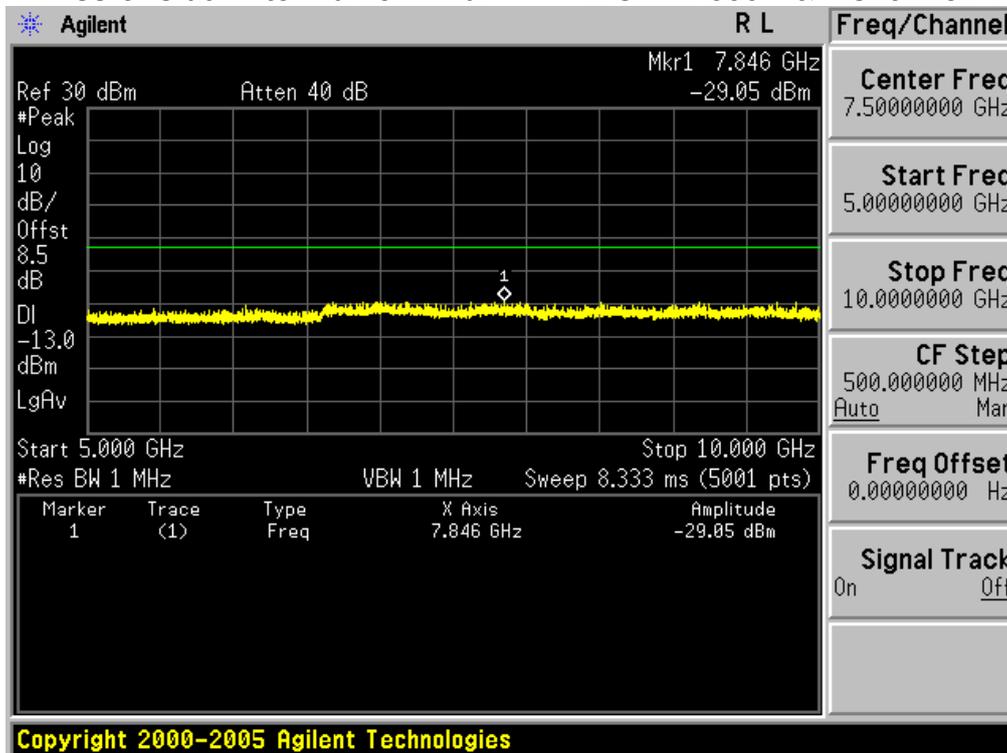


Spurious Emissions at Antenna Terminal WCDMA850 & Channel: 4183

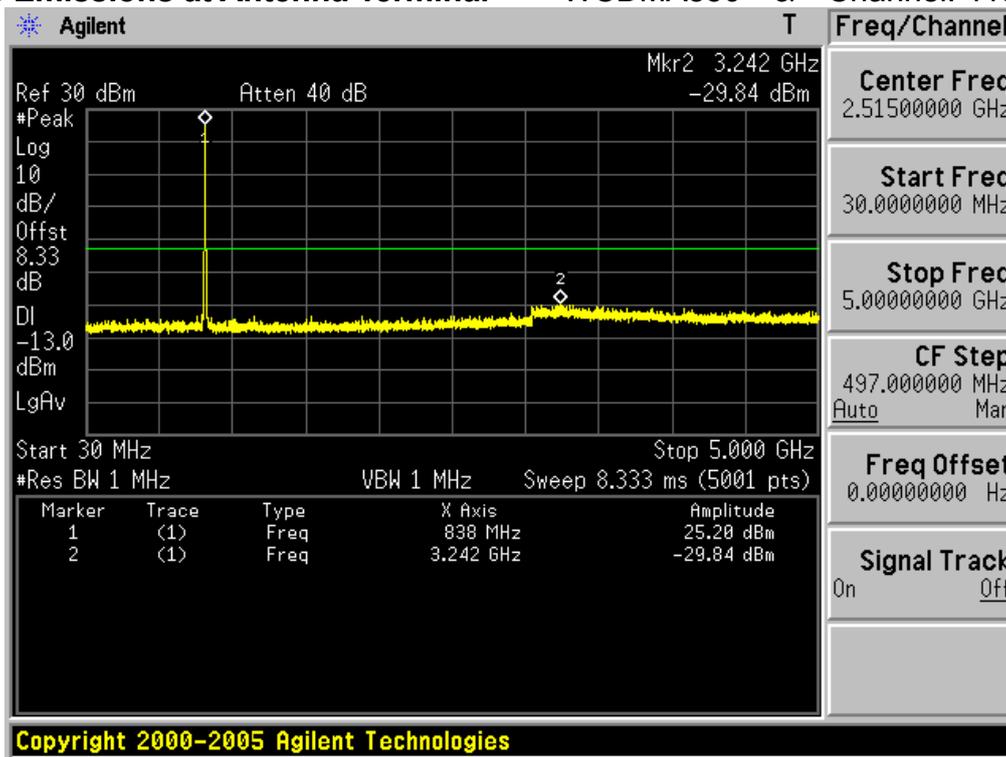


Spurious Emissions at Antenna Terminal WCDMA850 & Channel: 4183

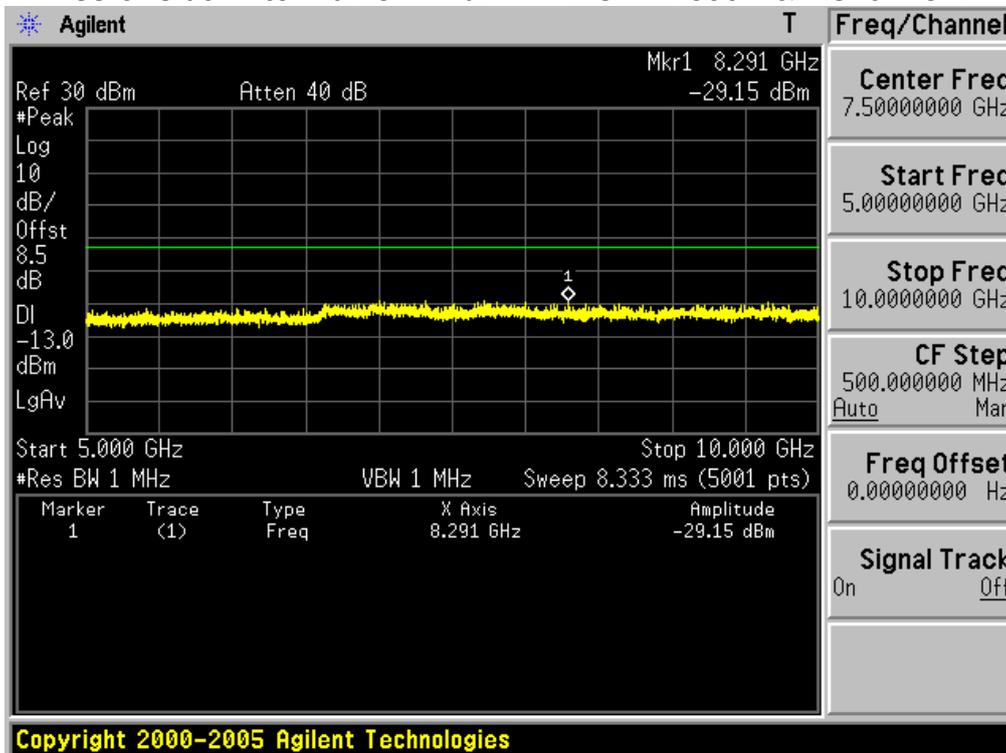


Spurious Emissions at Antenna Terminal WCDMA850 & Channel: 4233

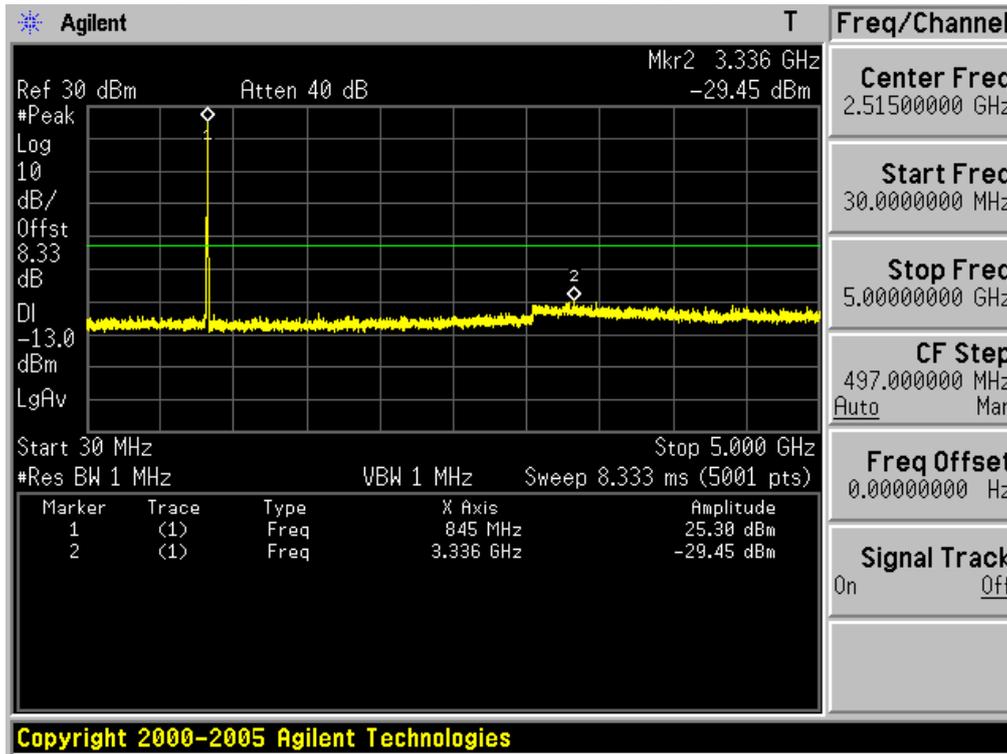


Spurious Emissions at Antenna Terminal WCDMA850 & Channel: 4233

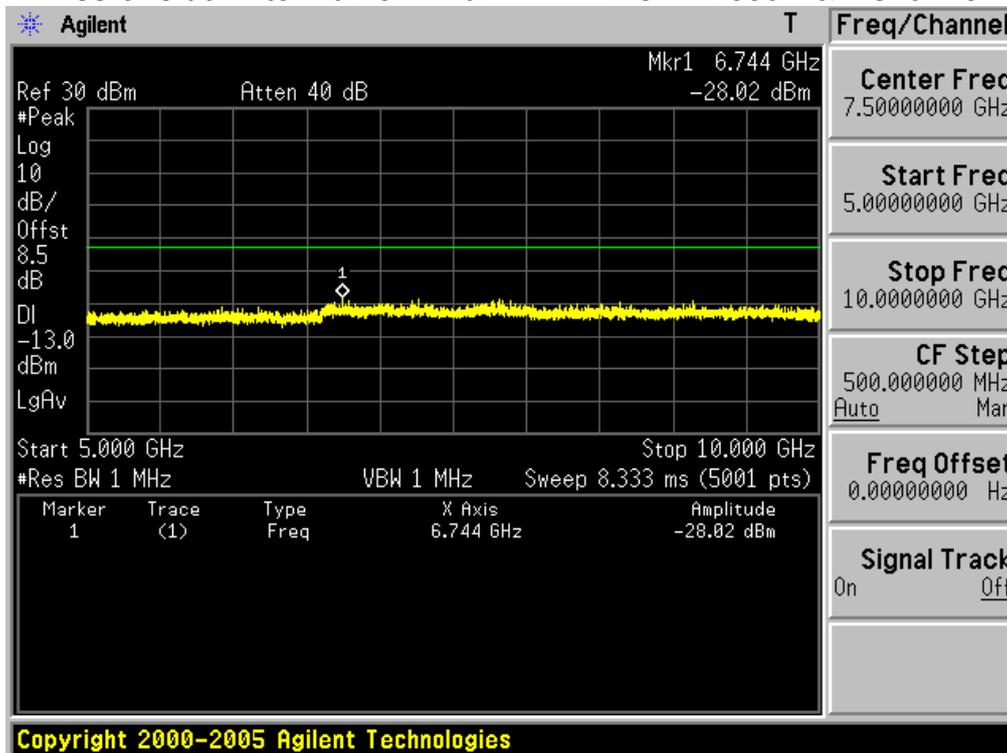


Spurious Emissions at Antenna Terminal WCDMA1900 & Channel: 9262

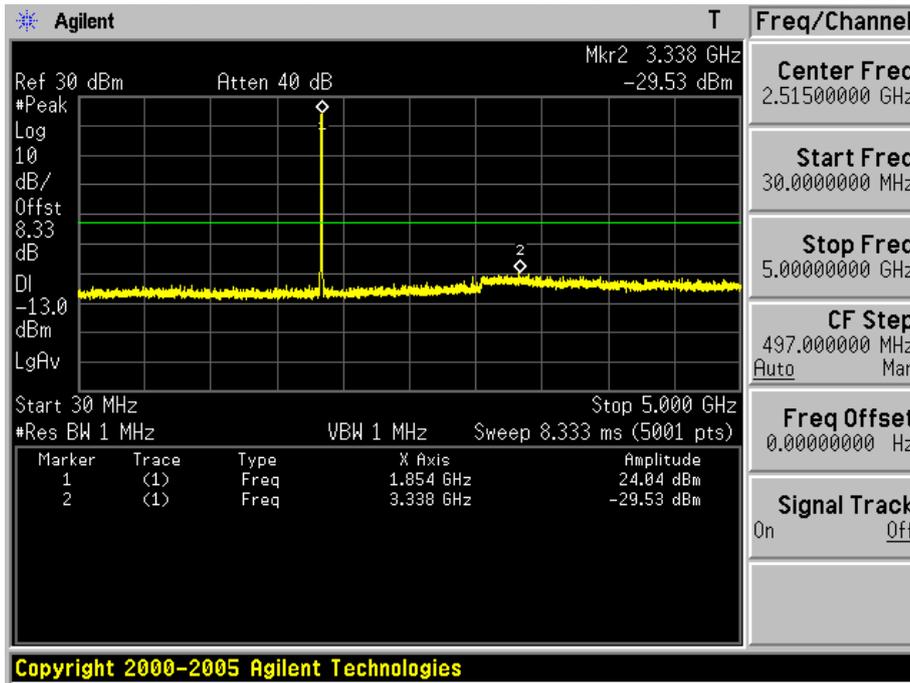


Spurious Emissions at Antenna Terminal WCDMA1900 & Channel: 9262

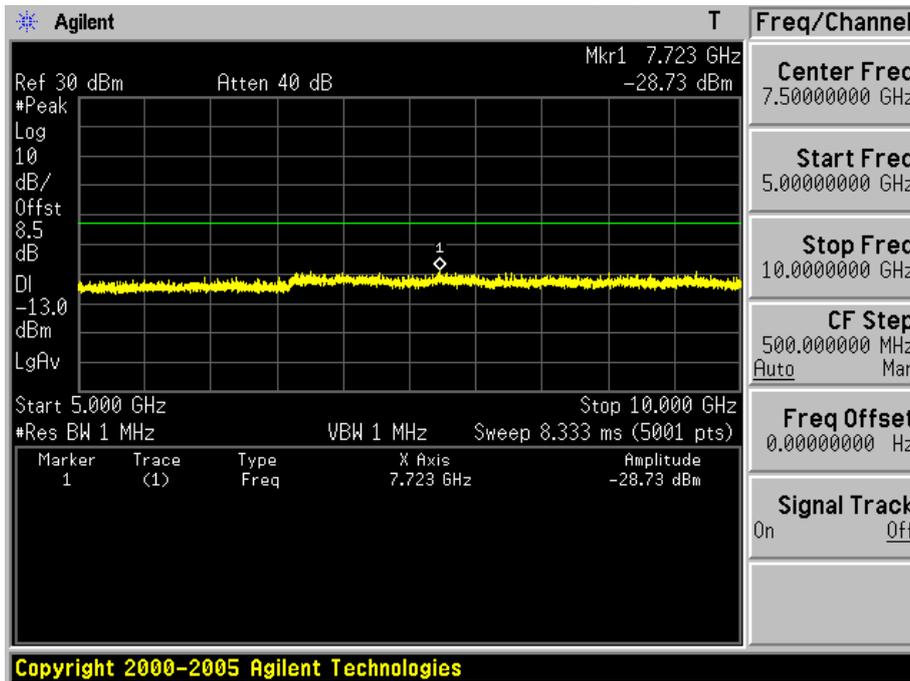

Spurious Emissions at Antenna Terminal WCDMA1900 & Channel: 9262

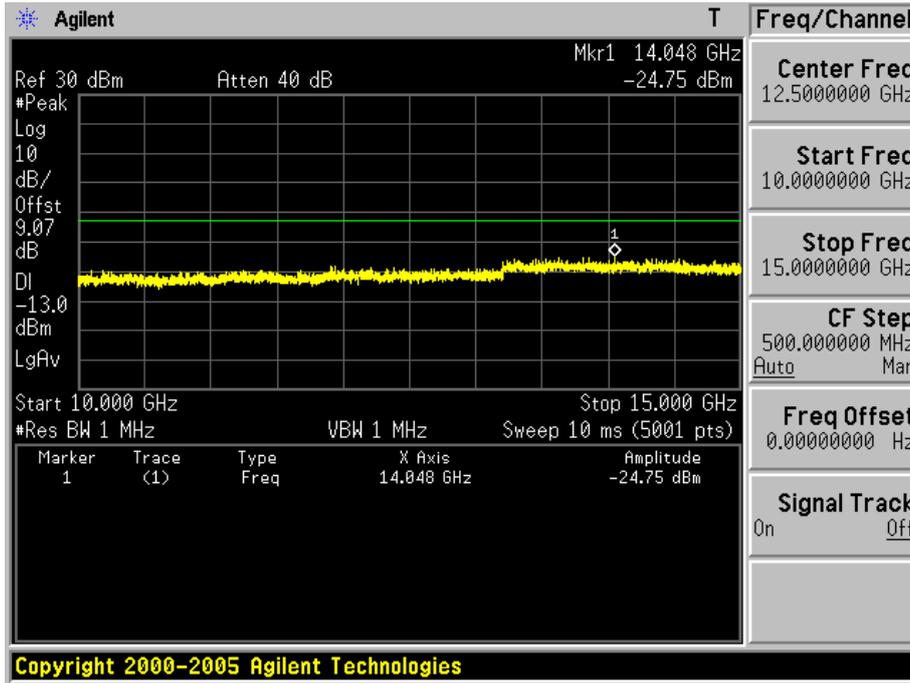


Spurious Emissions at Antenna Terminal WCDMA1900 & Channel: 9262

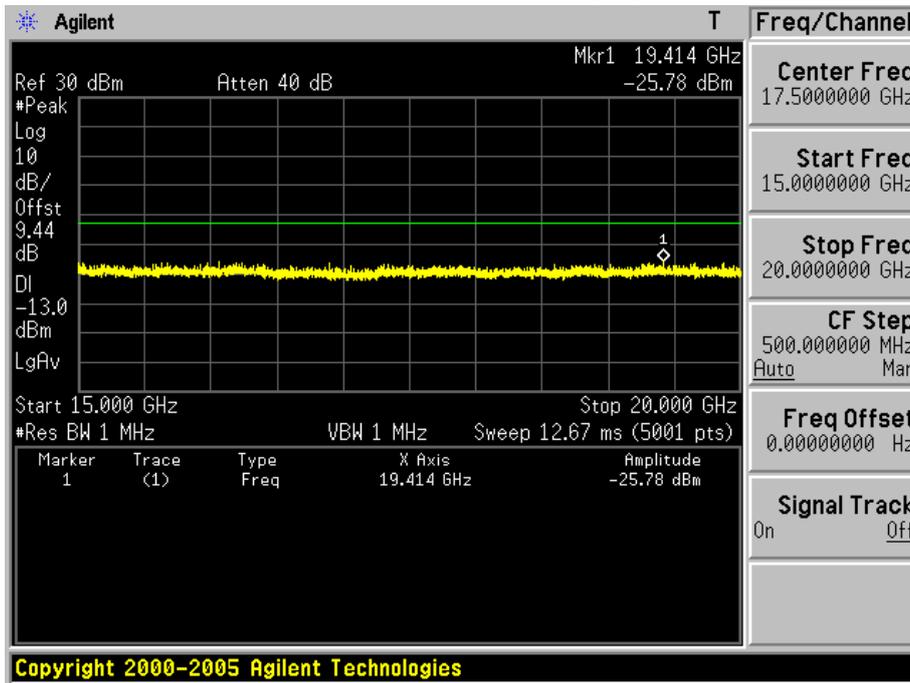


Spurious Emissions at Antenna Terminal

WCDMA1900 & Channel: 9400

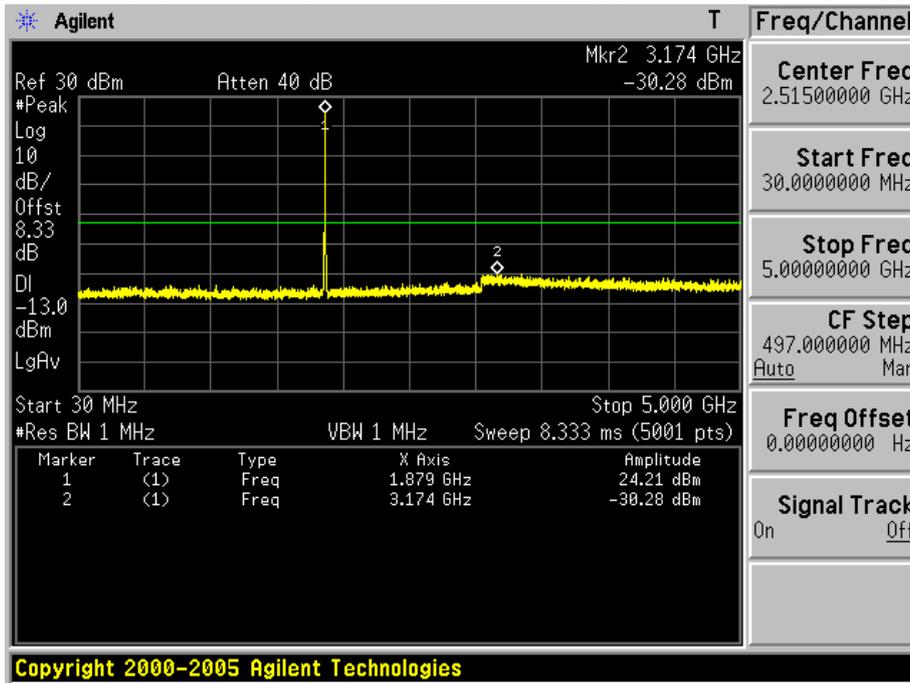


Spurious Emissions at Antenna Terminal

WCDMA1900 & Channel: 9400

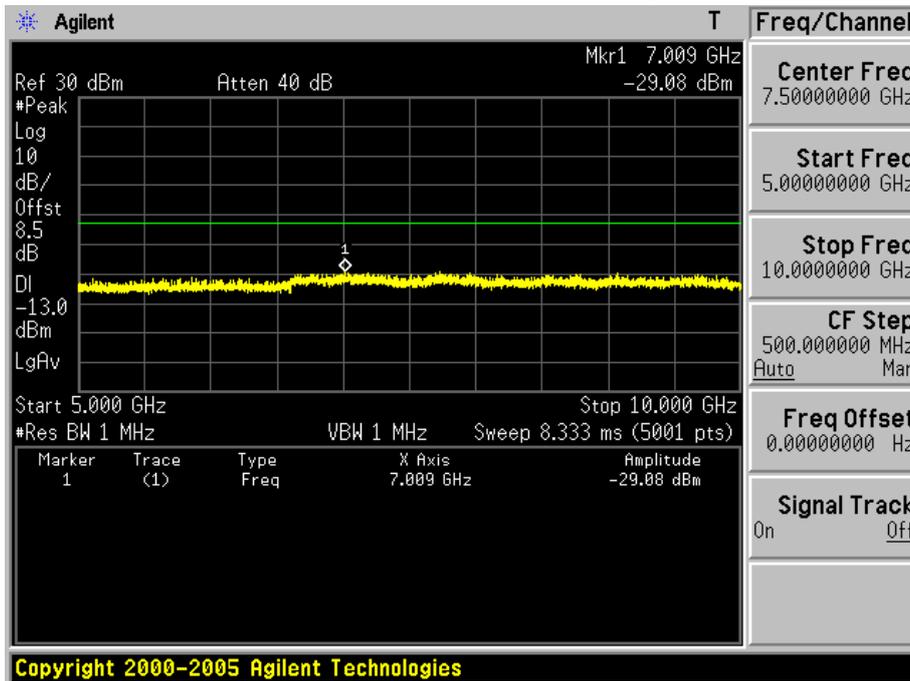


Spurious Emissions at Antenna Terminal

WCDMA1900 & Channel: 9400

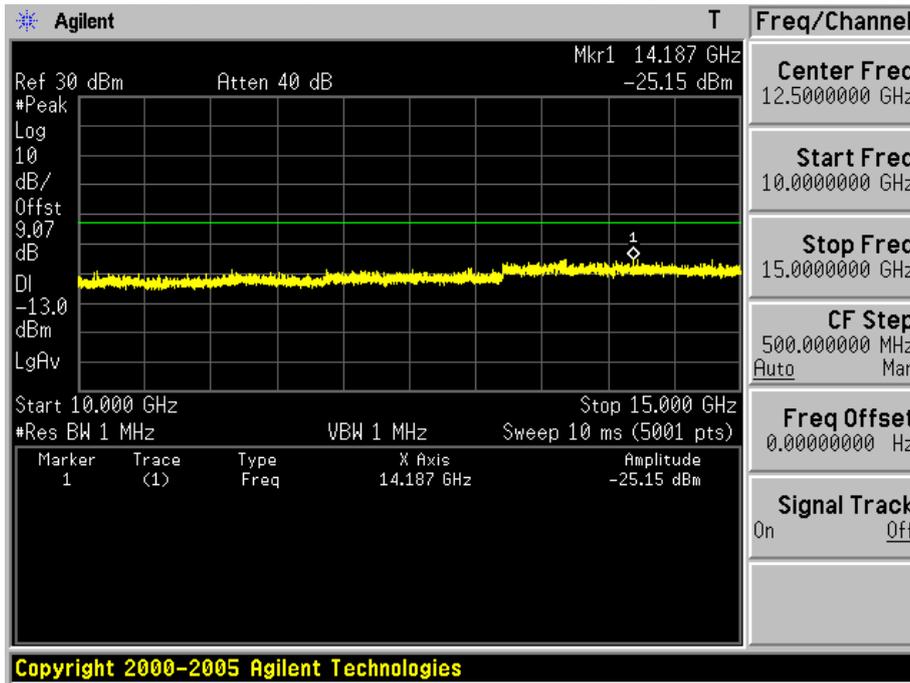


Spurious Emissions at Antenna Terminal


WCDMA1900 & Channel: 9400

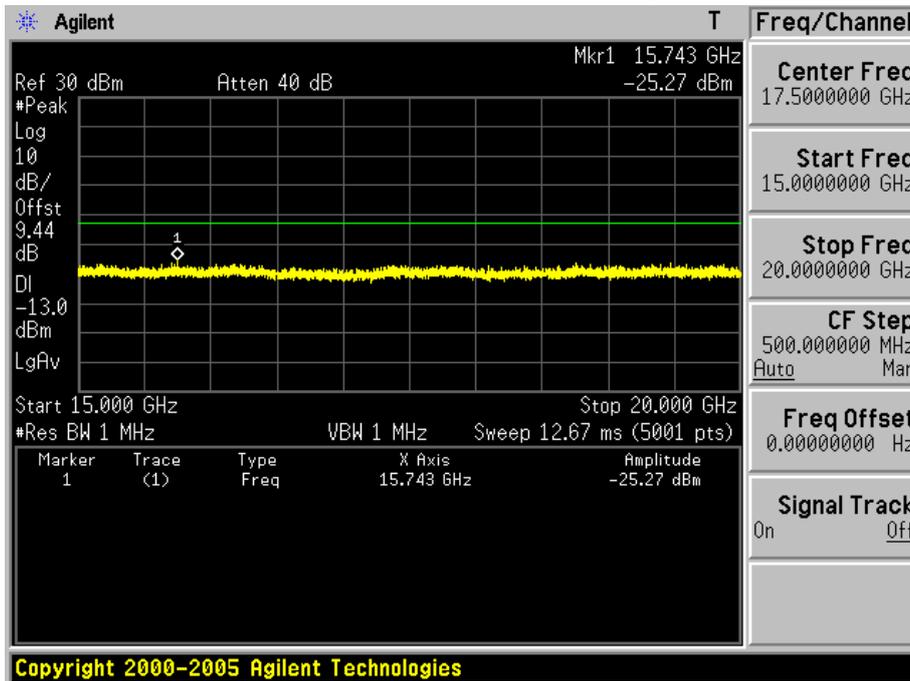


Spurious Emissions at Antenna Terminal **WCDMA1900 & Channel: 9538**

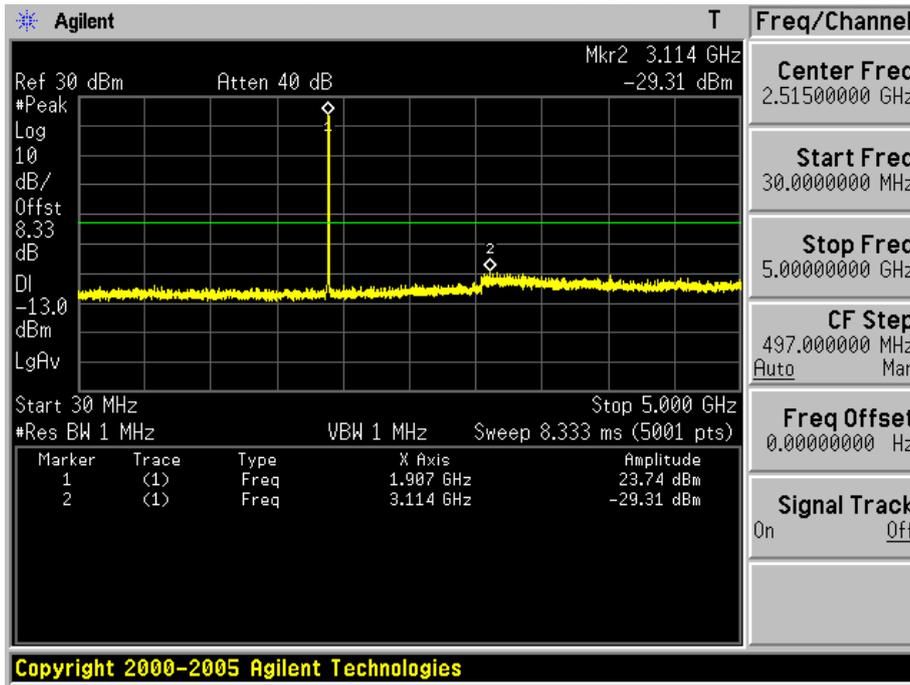


Spurious Emissions at Antenna Terminal **WCDMA1900 & Channel: 9538**

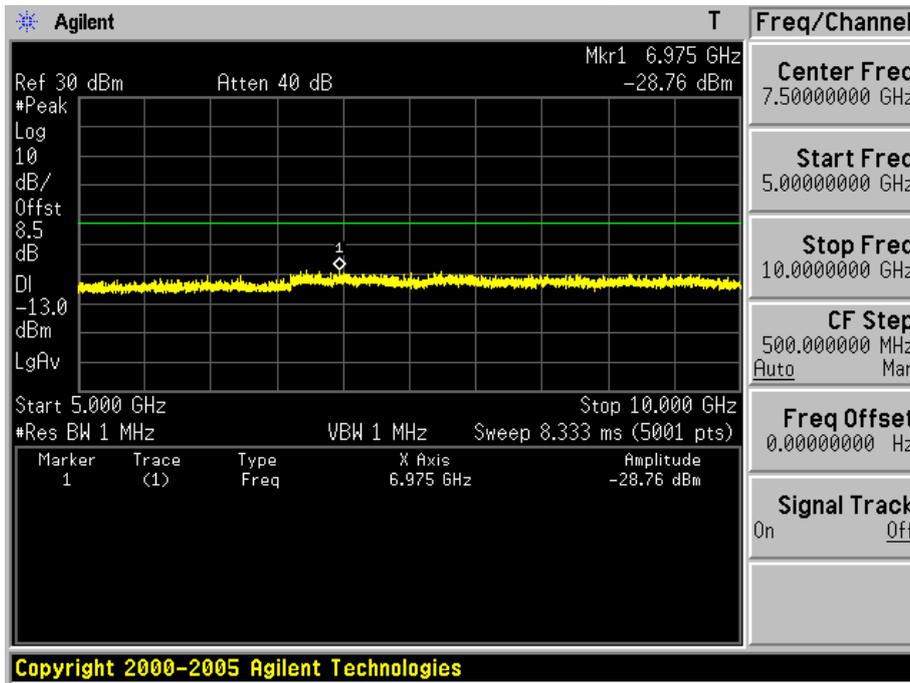

Spurious Emissions at Antenna Terminal WCDMA1900 & Channel: 9538

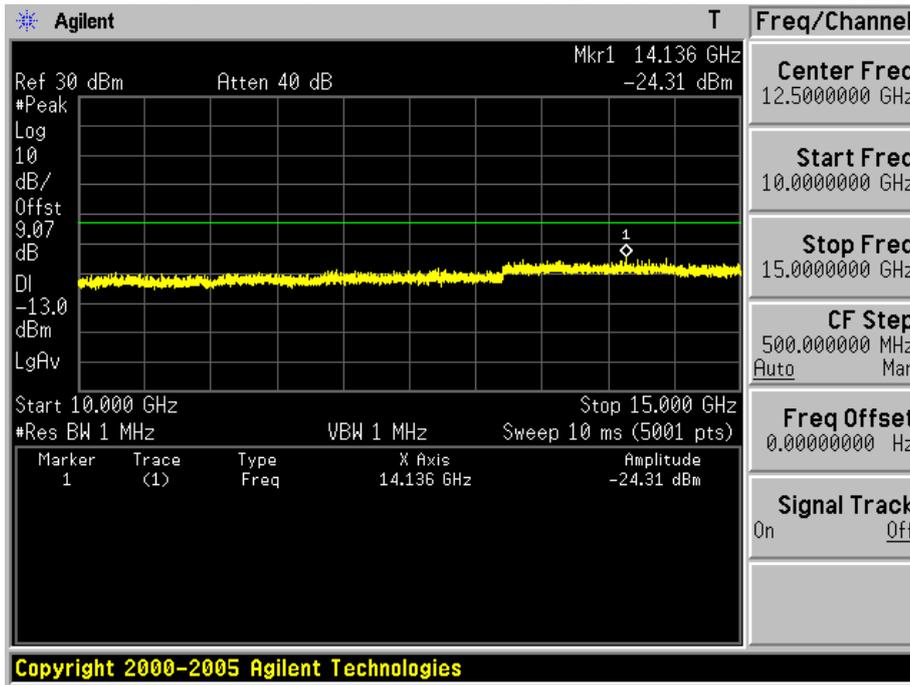

Spurious Emissions at Antenna Terminal WCDMA1900 & Channel:9538

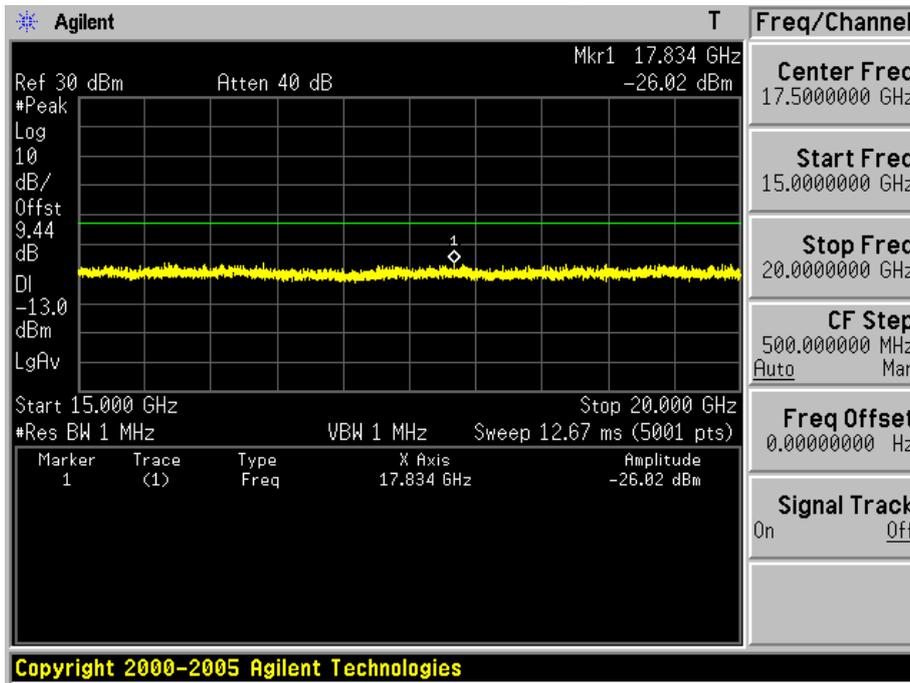


Band Edge

GSM850 & Channel: 128




Band Edge

GSM850 & Channel: 251

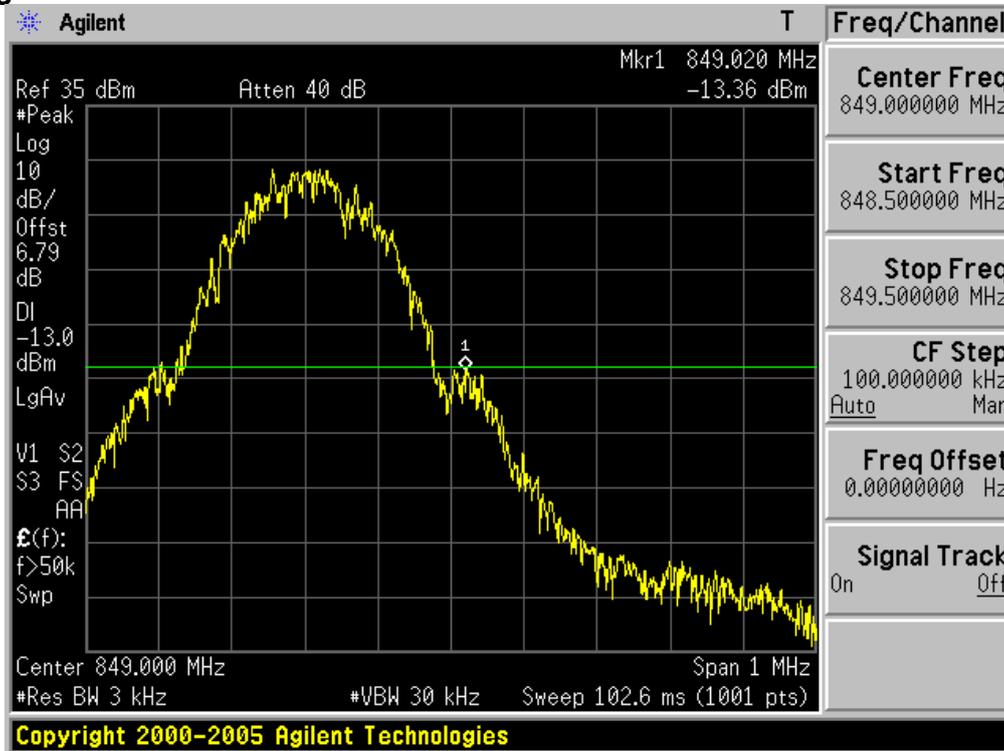


Band Edge

PCS1900 & Channel: 512

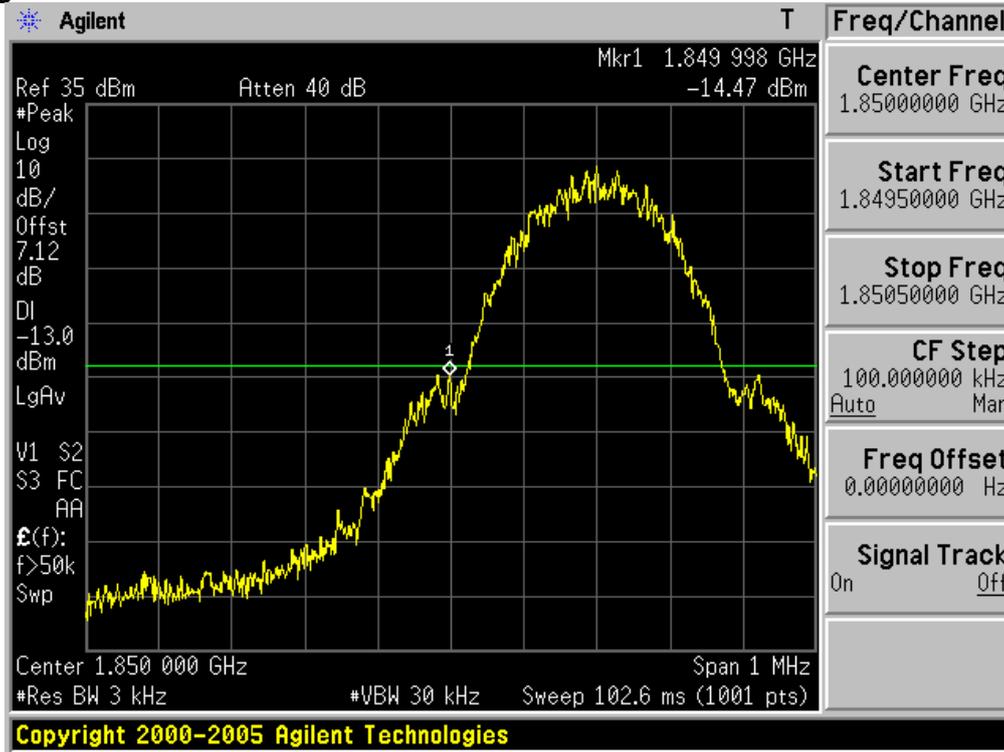


Band Edge

PCS1900 & Channel: 810

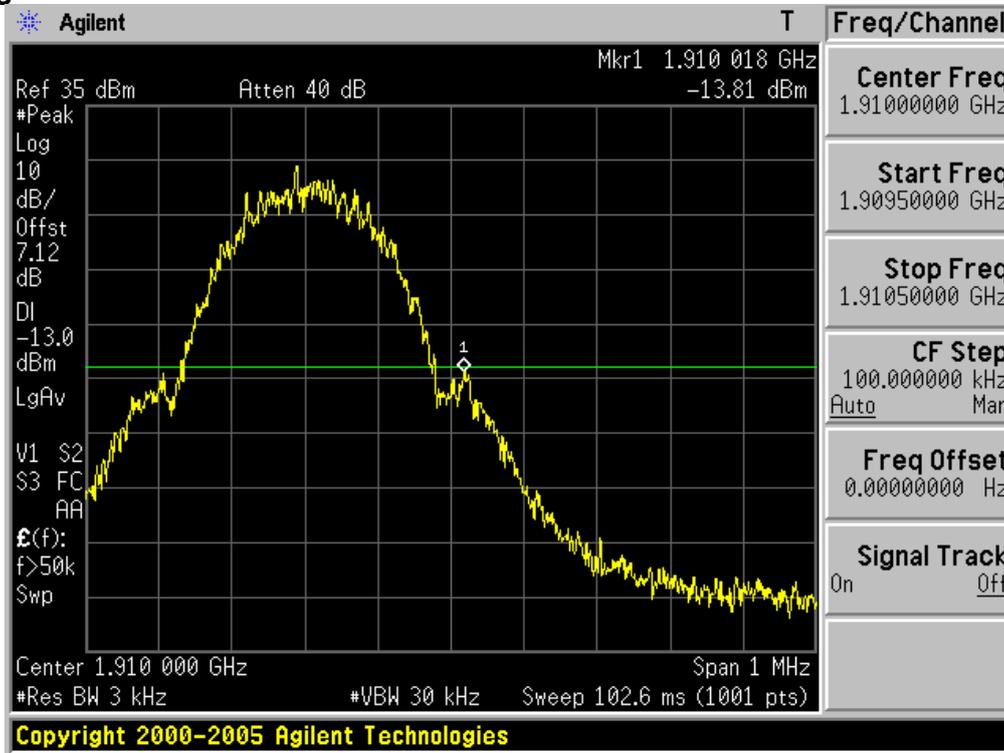


Band Edge

WCDMA850 & Channel: 4132

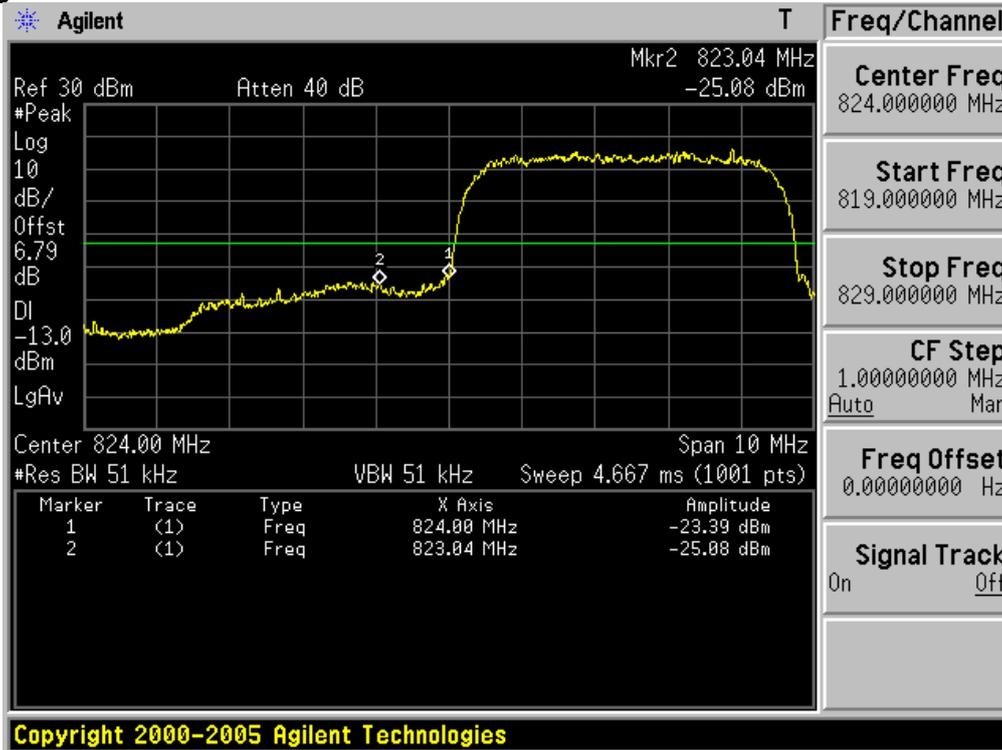


Band Edge

WCDMA850 & Channel: 4132

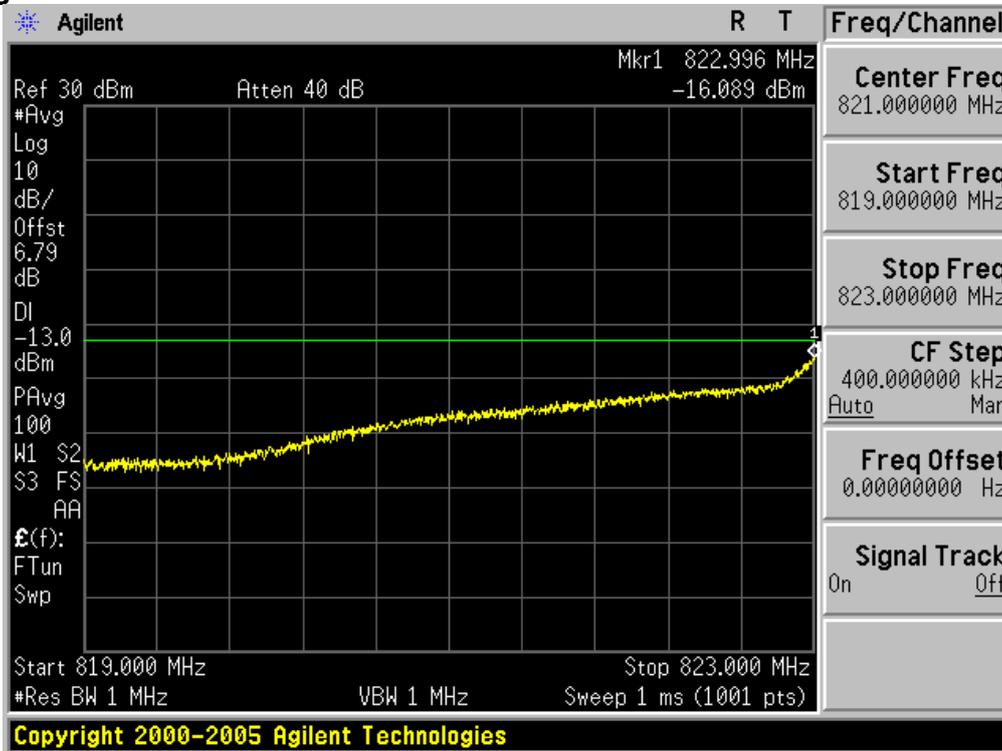


Band Edge

WCDMA850 & Channel: 4233

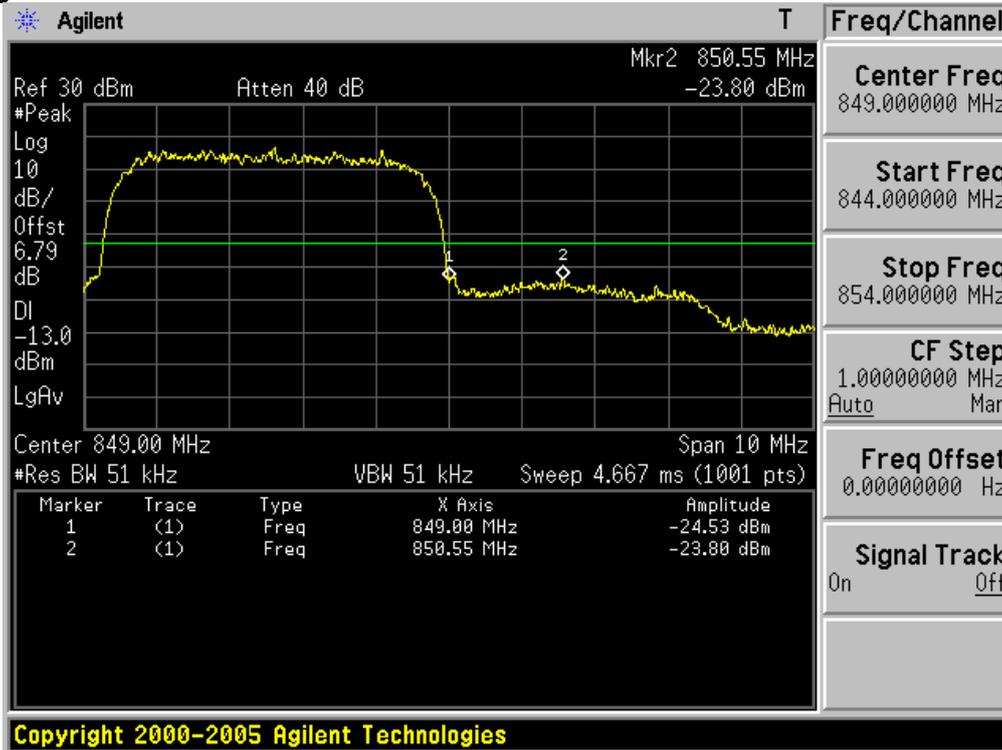


Band Edge

WCDMA850 & Channel: 4233

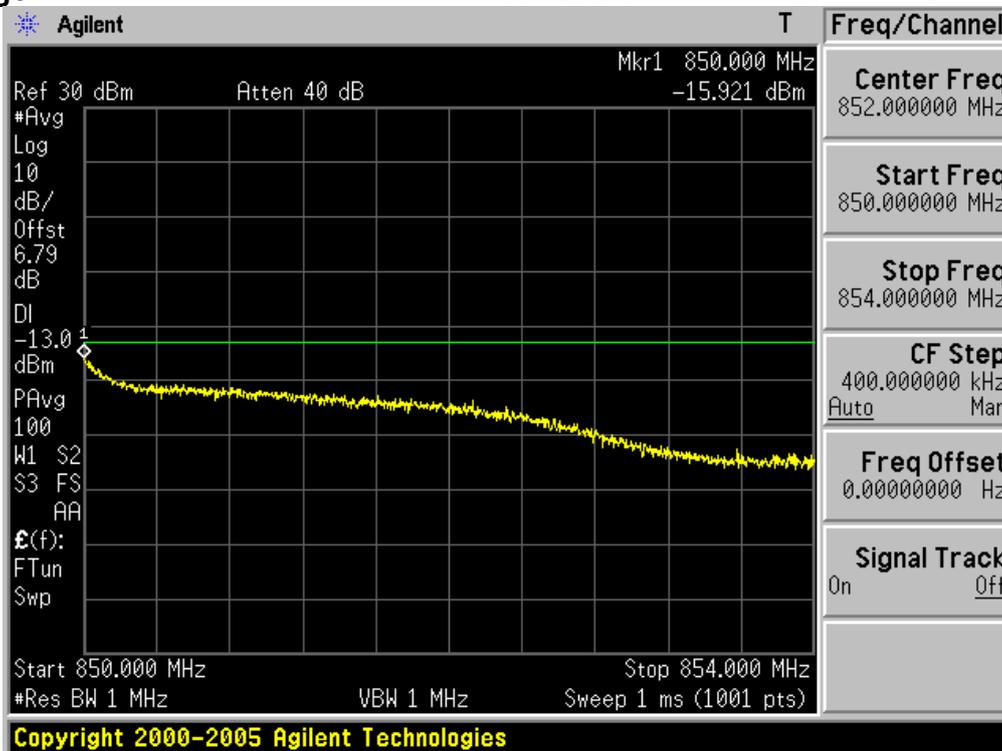


Band Edge

WCDMA1900 & Channel: 9262

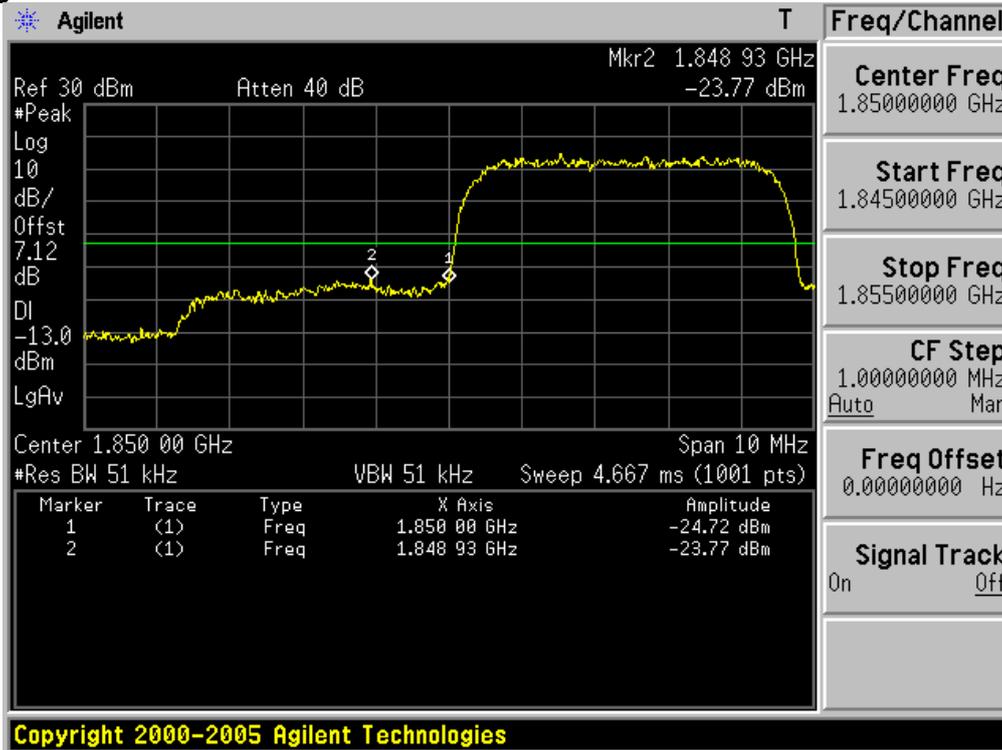

Band Edge

WCDMA1900 & Channel: 9262

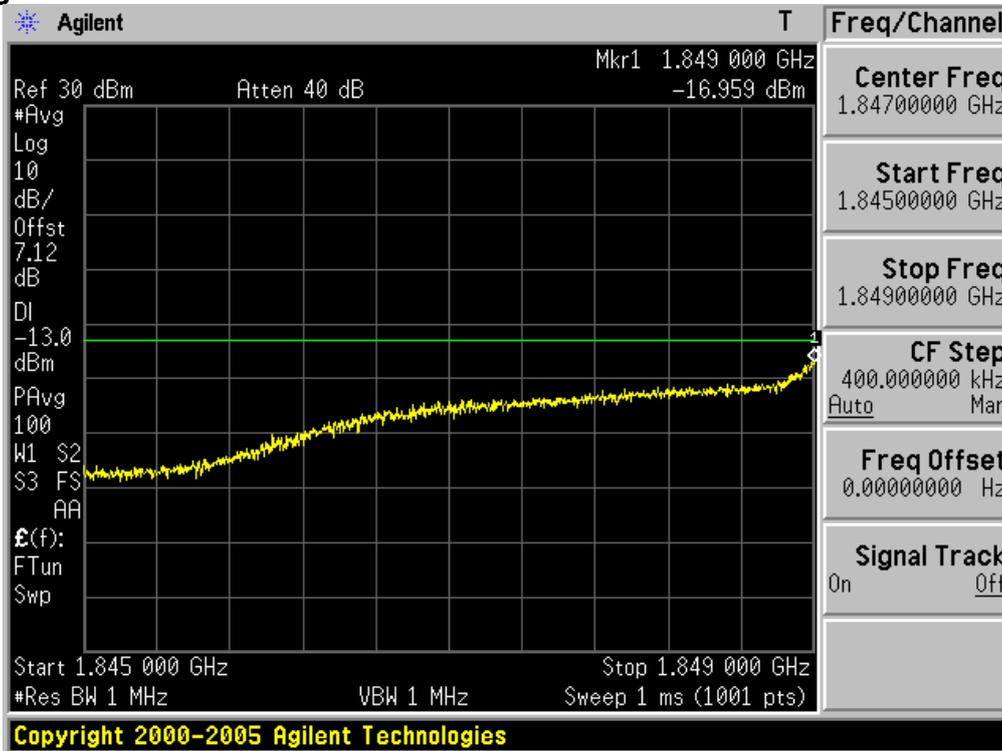

Band Edge

WCDMA1900 & Channel: 9538



Band Edge

WCDMA1900 & Channel: 9538

