


## 7.6 Switch in SAR exposure test results


This test was conducted with callbox requesting maximum power, and with the EUT in LTE Band 2 + Sub6 NR Band n66 call. Following procedure detailed in Section 4.3.7 and Appendix F.2, and using the measurement setup shown in Figure 6-1(c) since LTE and Sub6 NR are using different antenna ports, the SAR exposure switch measurement is performed with the EUT in various SAR exposure scenarios, i.e., in SAR<sub>sub6NR</sub> only scenario (t = 0s ~ 120s), SAR<sub>sub6NR</sub> + SAR<sub>LTE</sub> scenario (t = 120s ~ 240s) and SAR<sub>LTE</sub> only scenario (t > 240s).

Plot 1: Measured Tx power (dBm) versus time shows that the transmitting power changed in various SAR exposure scenarios, SAR<sub>sub6NR</sub> only (0s ~ 120s), SAR<sub>sub6NR</sub> + SAR<sub>LTE</sub> (120s ~ 240s) and SAR<sub>LTE</sub> only scenario (> 240s):

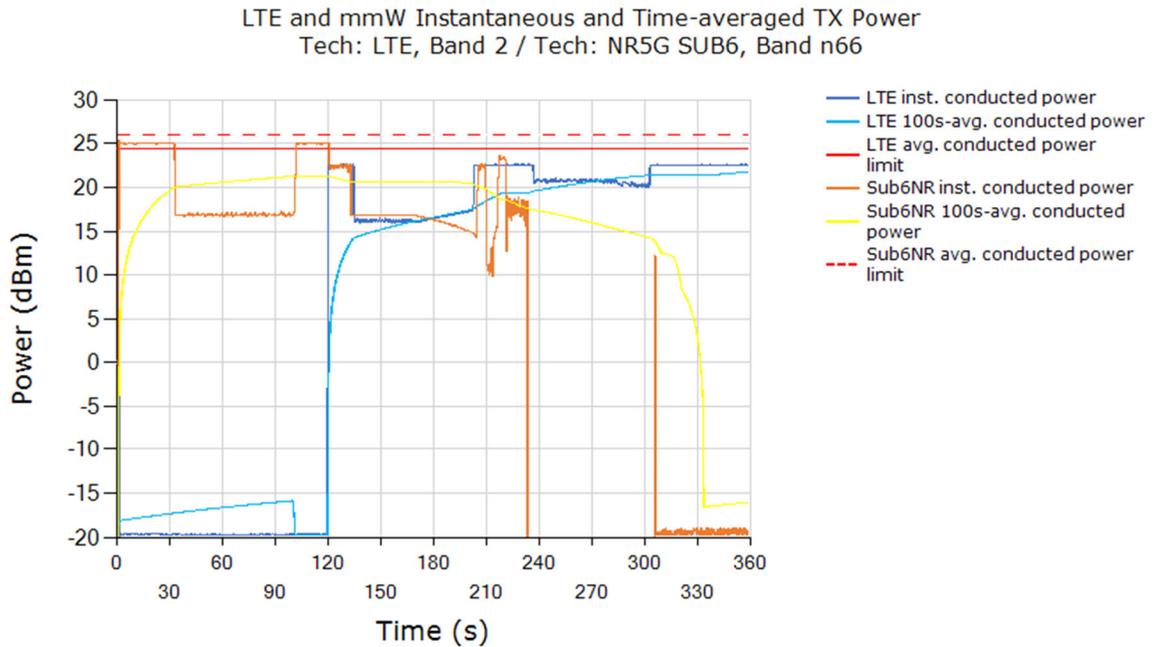

|  |  |   |   |  |
|--|--|---|---|--|
| FCC ID: ZNFF100TM                              |  <b>PCTEST</b><br>Proud to be part of  | <b>PART 2 RF EXPOSURE EVALUATION REPORT</b> |  <b>LG</b> | <b>Approved by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>1M2006150095-21-R1.ZNF | <b>Test Dates:</b><br>08/08/20 - 08/27/20  | <b>DUT Type:</b><br>Portable Handset        | Page 51 of 67   |  |

Plot 2: All the conducted Tx power measurement results were converted into time-averaged normalized SAR values using Equation (7a), (7b) and (7c), and plotted below to demonstrate that the time-averaged normalized SAR versus time does not exceed the FCC limit of 1 unit. Equation (7a) is used to convert the LTE Tx power of device to obtain 100s-averaged normalized SAR in LTE B2 as shown in black curve. Similarly, equation (7b) is used to obtain 100s-averaged normalized SAR in Sub6 NR n66 as shown in orange curve. Equation (7c) is used to obtain total time-averaged normalized SAR as shown in green curve (i.e., sum of black and orange curves).

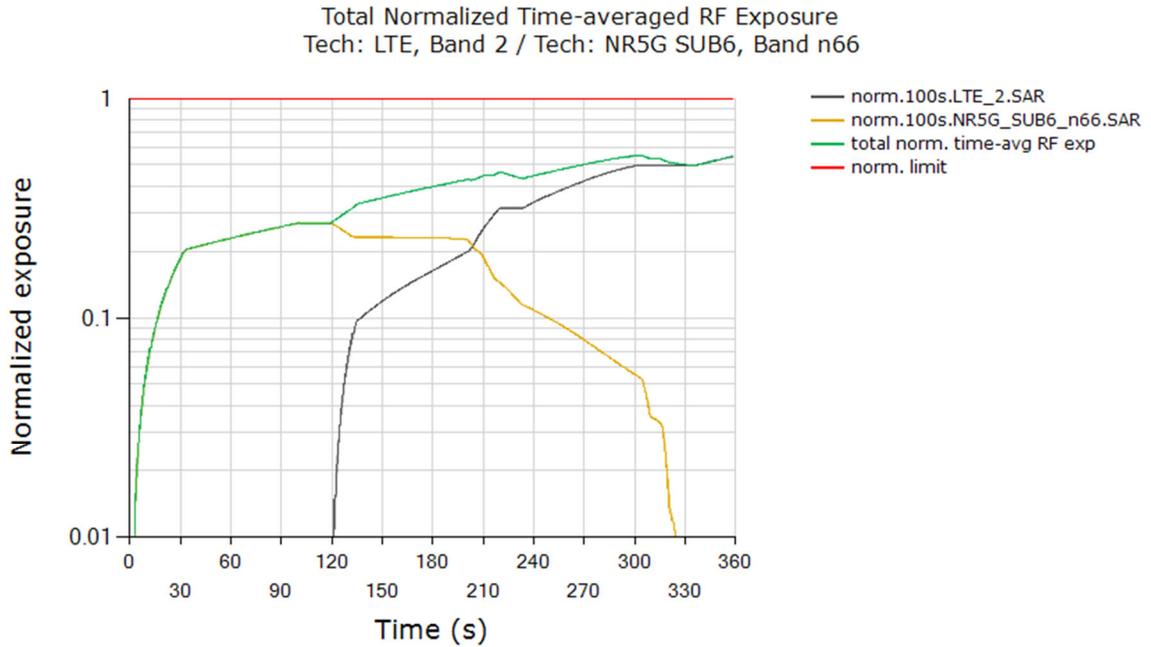

|  |        |
|--|--------|
|  | (W/kg) |
| FCC normalized total exposure limit            | 1.0    |
| Max time averaged normalized SAR (green curve) | 0.552  |
| Validated                                      |        |

**Plot Notes:** Device starts predominantly in Sub6 NR SAR exposure scenario between 0s and 120s, and in LTE SAR + Sub6 NR SAR exposure scenario between 120s and 240s, and in predominantly in LTE SAR exposure scenario after t=240s. Here, Smart Transmit allocates a maximum of 75% of exposure margin (based on 3dB reserve margin setting) for Sub6 NR. This corresponds to a normalized 1gSAR exposure value = 75% \* 0.607 W/kg measured SAR at Sub6 NR  $P_{limit}$  / 1.6W/kg limit = 0.285 ± 1dB device related uncertainty (see orange curve between 0s~120s). For predominantly LTE SAR exposure scenario, maximum normalized 1gSAR exposure should correspond to 100% exposure margin = 0.938 W/kg measured SAR at LTE  $P_{limit}$  / 1.6W/kg limit = 0.586 ± 1dB device related uncertainty (see black curve after t = 240s). Additionally, in SAR exposure switch test, at all times the total time-averaged normalized RF exposure (green curve) should not exceed normalized  $SAR_{design\_target}$  + 1dB device uncertainty. In this test, with a maximum normalized SAR of 0.552 being  $\leq 0.79$  (= 1.01/1.6 + 1dB device uncertainty), the above test result validated the continuity of power limiting in SAR exposure switch scenario.

|  |   |   |               |  |
|--|---|---|---------------|--|
| FCC ID: ZNFF100TM                              | <b>PCTEST</b><br>Proud to be part of  element | <b>PART 2 RF EXPOSURE EVALUATION REPORT</b> | <b>LG</b>     | <b>Approved by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>1M2006150095-21-R1.ZNF | <b>Test Dates:</b><br>08/08/20 - 08/27/20     | <b>DUT Type:</b><br>Portable Handset        | Page 52 of 67 |  |

# 8 SYSTEM VERIFICATION (FREQ < 6 GHZ)

## 8.1 Tissue Verification

**Table 8-1  
Measured Tissue Properties**

| Calibrated for Tests Performed on: | Tissue Type | Tissue Temp During Calibration (°C) | Measured Frequency (MHz) | Measured Conductivity, $\sigma$ (S/m) | Measured Dielectric Constant, $\epsilon$ | TARGET Conductivity, $\sigma$ (S/m) | TARGET Dielectric Constant, $\epsilon$ | % dev $\sigma$ | % dev $\epsilon$ |
|------------------------------------|-------------|-------------------------------------|--------------------------|---------------------------------------|--|-------------------------------------|--|----------------|------------------|
| 08/10/2020                         | 1750 Body   | 21.6                                | 1710                     | 1.443                                 | 54.064                                   | 1.463                               | 53.537                                 | -1.37%         | 0.98%            |
|                                    |             |                                     | 1720                     | 1.451                                 | 54.061                                   | 1.469                               | 53.511                                 | -1.23%         | 1.03%            |
|                                    |             |                                     | 1745                     | 1.470                                 | 54.052                                   | 1.485                               | 53.445                                 | -1.01%         | 1.14%            |
|                                    |             |                                     | 1750                     | 1.475                                 | 54.050                                   | 1.488                               | 53.432                                 | -0.87%         | 1.16%            |
|                                    |             |                                     | 1770                     | 1.490                                 | 54.031                                   | 1.501                               | 53.379                                 | -0.73%         | 1.22%            |
|                                    |             |                                     | 1790                     | 1.505                                 | 53.994                                   | 1.514                               | 53.326                                 | -0.59%         | 1.25%            |
| 08/25/2020                         | 1750 Body   | 21.8                                | 1710                     | 1.413                                 | 52.819                                   | 1.463                               | 53.537                                 | -3.42%         | -1.34%           |
|                                    |             |                                     | 1720                     | 1.420                                 | 52.819                                   | 1.469                               | 53.511                                 | -3.34%         | -1.29%           |
|                                    |             |                                     | 1745                     | 1.438                                 | 52.819                                   | 1.485                               | 53.445                                 | -3.16%         | -1.17%           |
|                                    |             |                                     | 1750                     | 1.442                                 | 52.817                                   | 1.488                               | 53.432                                 | -3.09%         | -1.15%           |
|                                    |             |                                     | 1770                     | 1.456                                 | 52.802                                   | 1.501                               | 53.379                                 | -3.00%         | -1.08%           |
|                                    |             |                                     | 1790                     | 1.470                                 | 52.775                                   | 1.514                               | 53.326                                 | -2.91%         | -1.03%           |
| 08/10/2020                         | 1900 Body   | 21.6                                | 1850                     | 1.550                                 | 53.849                                   | 1.520                               | 53.300                                 | 1.97%          | 1.03%            |
|                                    |             |                                     | 1860                     | 1.557                                 | 53.840                                   | 1.520                               | 53.300                                 | 2.43%          | 1.01%            |
|                                    |             |                                     | 1880                     | 1.571                                 | 53.830                                   | 1.520                               | 53.300                                 | 3.36%          | 0.99%            |
|                                    |             |                                     | 1900                     | 1.584                                 | 53.808                                   | 1.520                               | 53.300                                 | 4.21%          | 0.95%            |
|                                    |             |                                     | 1905                     | 1.588                                 | 53.801                                   | 1.520                               | 53.300                                 | 4.47%          | 0.94%            |
|                                    |             |                                     | 1910                     | 1.592                                 | 53.792                                   | 1.520                               | 53.300                                 | 4.74%          | 0.92%            |
| 08/24/2020                         | 1900 Body   | 21.3                                | 1850                     | 1.548                                 | 53.011                                   | 1.520                               | 53.300                                 | 1.84%          | -0.54%           |
|                                    |             |                                     | 1860                     | 1.555                                 | 53.002                                   | 1.520                               | 53.300                                 | 2.30%          | -0.56%           |
|                                    |             |                                     | 1880                     | 1.569                                 | 52.984                                   | 1.520                               | 53.300                                 | 3.22%          | -0.59%           |
|                                    |             |                                     | 1900                     | 1.582                                 | 52.964                                   | 1.520                               | 53.300                                 | 4.08%          | -0.63%           |
|                                    |             |                                     | 1905                     | 1.586                                 | 52.959                                   | 1.520                               | 53.300                                 | 4.34%          | -0.64%           |
|                                    |             |                                     | 1910                     | 1.589                                 | 52.953                                   | 1.520                               | 53.300                                 | 4.54%          | -0.65%           |
| 08/25/2020                         | 1900 Body   | 21.8                                | 1850                     | 1.514                                 | 52.673                                   | 1.520                               | 53.300                                 | -0.39%         | -1.18%           |
|                                    |             |                                     | 1860                     | 1.522                                 | 52.662                                   | 1.520                               | 53.300                                 | 0.13%          | -1.20%           |
|                                    |             |                                     | 1880                     | 1.536                                 | 52.640                                   | 1.520                               | 53.300                                 | 1.05%          | -1.24%           |
|                                    |             |                                     | 1900                     | 1.549                                 | 52.605                                   | 1.520                               | 53.300                                 | 1.91%          | -1.30%           |
|                                    |             |                                     | 1905                     | 1.552                                 | 52.594                                   | 1.520                               | 53.300                                 | 2.11%          | -1.32%           |
|                                    |             |                                     | 1910                     | 1.556                                 | 52.584                                   | 1.520                               | 53.300                                 | 2.37%          | -1.34%           |
| 08/27/2020                         | 3700 Body   | 19.5                                | 3500                     | 3.151                                 | 49.331                                   | 3.314                               | 51.321                                 | -4.92%         | -3.88%           |
|                                    |             |                                     | 3550                     | 3.209                                 | 49.234                                   | 3.372                               | 51.254                                 | -4.83%         | -3.94%           |
|                                    |             |                                     | 3560                     | 3.221                                 | 49.220                                   | 3.384                               | 51.240                                 | -4.82%         | -3.94%           |
|                                    |             |                                     | 3600                     | 3.269                                 | 49.156                                   | 3.431                               | 51.186                                 | -4.72%         | -3.97%           |
|                                    |             |                                     | 3650                     | 3.327                                 | 49.045                                   | 3.489                               | 51.118                                 | -4.64%         | -4.06%           |
|                                    |             |                                     | 3690                     | 3.376                                 | 48.981                                   | 3.536                               | 51.063                                 | -4.52%         | -4.08%           |
|                                    |             |                                     | 3700                     | 3.387                                 | 48.966                                   | 3.548                               | 51.050                                 | -4.54%         | -4.08%           |

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 D01v01r04 and IEEE 1526-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

|  |  |   |   |  |
|--|--|---|---|--|
| FCC ID: ZNFF100TM                              |  <b>PCTEST</b><br>Proud to be part of  | <b>PART 2 RF EXPOSURE EVALUATION REPORT</b> |  | <b>Approved by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>1M2006150095-21-R1.ZNF | <b>Test Dates:</b><br>08/08/20 - 08/27/20  | <b>DUT Type:</b><br>Portable Handset        | Page 53 of 67   |  |

## 8.2 Test System Verification


Prior to SAR assessment, the system is verified to  $\pm 10\%$  of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix C.

**Table 8-2  
System Verification Results – 1g**

| System Verification<br>TARGET & MEASURED |                        |             |            |                |                  |                 |           |          |                                   |                                     |   |                             |
|--|------------------------|-------------|------------|----------------|------------------|-----------------|-----------|----------|-----------------------------------|-------------------------------------|---|-----------------------------|
| SAR System #                             | Tissue Frequency (MHz) | Tissue Type | Date       | Amb. Temp (°C) | Liquid Temp (°C) | Input Power (W) | Source SN | Probe SN | Measured SAR <sub>1g</sub> (W/kg) | 1 W Target SAR <sub>1g</sub> (W/kg) | 1 W Normalized SAR <sub>1g</sub> (W/kg) | Deviation <sub>1g</sub> (%) |
| M  | 1750                   | BODY        | 08/10/2020 | 23.1           | 21.6             | 0.100           | 1150      | 7526     | 3.890                             | 36.600                              | 38.900                                  | 6.28%                       |
| N  | 1750                   | BODY        | 08/25/2020 | 22.7           | 21.8             | 0.100           | 1150      | 7526     | 3.670                             | 36.600                              | 36.700                                  | 0.27%                       |
| M  | 1900                   | BODY        | 08/10/2020 | 23.1           | 21.6             | 0.100           | 5d148     | 7526     | 4.170                             | 39.100                              | 41.700                                  | 6.65%                       |
| N  | 1900                   | BODY        | 08/25/2020 | 22.7           | 21.8             | 0.100           | 5d148     | 7526     | 3.800                             | 39.100                              | 38.000                                  | -2.81%                      |
| M  | 3700                   | BODY        | 08/27/2020 | 22.0           | 19.5             | 0.100           | 1067      | 7526     | 6.590                             | 65.200                              | 65.900                                  | 1.07%                       |

**Table 8-3  
System Verification Results – 10g**

| System Verification<br>TARGET & MEASURED |                        |             |            |                |                  |                 |           |          |                                    |                                      |  |                              |
|--|------------------------|-------------|------------|----------------|------------------|-----------------|-----------|----------|------------------------------------|--------------------------------------|--|------------------------------|
| SAR System #                             | Tissue Frequency (MHz) | Tissue Type | Date       | Amb. Temp (°C) | Liquid Temp (°C) | Input Power (W) | Source SN | Probe SN | Measured SAR <sub>10g</sub> (W/kg) | 1 W Target SAR <sub>10g</sub> (W/kg) | 1 W Normalized SAR <sub>10g</sub> (W/kg) | Deviation <sub>10g</sub> (%) |
| M  | 1900                   | BODY        | 08/24/2020 | 22.2           | 21.3             | 0.100           | 5d148     | 7526     | 2.150                              | 20.500                               | 21.500                                   | 4.88%                        |

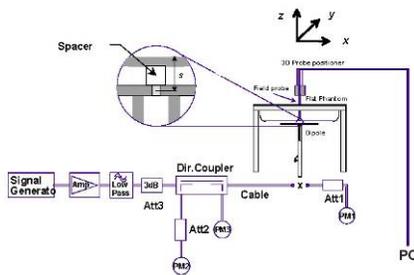

**Figure 8-1  
System Verification Setup Diagram**



**Figure 8-2  
System Verification Setup Photo**

|   |  |   |    |                                 |
|---|--|---|----|---------------------------------|
| FCC ID: ZNFF100TM                       | PCTEST<br>Proud to be part of  element | PART 2 RF EXPOSURE EVALUATION<br>REPORT | LG | Approved by:<br>Quality Manager |
| Document S/N:<br>1M2006150095-21-R1.ZNF | Test Dates:<br>08/08/20 - 08/27/20     | DUT Type:<br>Portable Handset           |    | Page 54 of 67                   |

### 9.1 Time-varying Tx Power Case

Following Section 4.4 procedure, time-averaged SAR measurements are conducted using a SAR probe at peak location of area scan over 500 seconds. cDASY6 system verification for SAR measurement is provided in Section 10, and the associated SPEAG certificates are attached in Appendix G.

SAR probe integration times depend on the communication signal being tested as defined in the probe calibration parameters.

Since the sampling rate used by cDASY6 for pointSAR measurements is not in user control, the number of points in 100s interval is determined from the scan duration setting in cDASY6 time-average pointSAR measurement by (100s cDASY6\_scan\_duration \* total number of pointSAR values recorded). Running average is performed over these number of points in excel spreadsheet to obtain 100s averaged point SAR.

Following Section 4.4, for each of selected technology/band (listed in Table 6-2):

8. With *Reserve\_power\_margin* set to 0 dB, area scan is performed at  $P_{limit}$ , and time-averaged pointSAR measurements are conducted to determine the pointSAR at  $P_{limit}$  at peak location, denoted as  $pointSAR_{P_{limit}}$ .
9. With *Reserve\_power\_margin* set to actual (intended) value, two more time-averaged pointSAR measurements are performed at the same peak location for test sequences 1 and 2.

To demonstrate compliance, all the pointSAR measurement results were converted into 1gSAR or 10gSAR values by using Equation (3a), rewritten below:


$$1g\_or\_10gSAR(t) = \frac{pointSAR(t)}{pointSAR_{P_{limit}}} * 1g\_or\_10gSAR_{P_{limit}} \quad (3a)$$

where,  $pointSAR(t)$ ,  $pointSAR_{P_{limit}}$ , and  $1g\_or\_10gSAR_{P_{limit}}$  correspond to the measured instantaneous point SAR, measured point SAR at  $P_{limit}$  from above step 1 and 2, and measured 1gSAR or 10gSAR values at  $P_{limit}$  obtained from Part 1 report and listed in Table 6-2 of this report.

|  |  |   |   |  |
|--|--|---|---|--|
| FCC ID: ZNFF100TM                              |  <b>PCTEST</b><br>Proud to be part of  | <b>PART 2 RF EXPOSURE EVALUATION<br/>REPORT</b> |  <b>LG</b> | <b>Approved by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>1M2006150095-21-R1.ZNF | <b>Test Dates:</b><br>08/08/20 - 08/27/20  | <b>DUT Type:</b><br>Portable Handset            | Page 55 of 67   |  |


## 9.1.1 LTE Band 25

### SAR test results for test sequence 1:

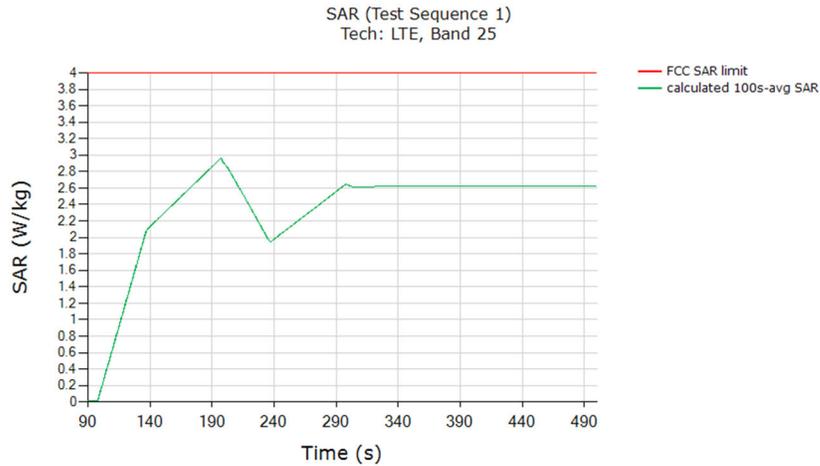

|  | (W/kg) |
|--|--------|
| FCC 10gSAR limit   | 4.0    |
| Max 100s-time averaged point 10gSAR (green curve)  | 2.961  |
| <b>Validated:</b> Max time averaged SAR (green curve) is within 1 dB device uncertainty of measured SAR at $P_{limit}$ (last column in Table 6-2). |        |

### SAR test results for test sequence 2:

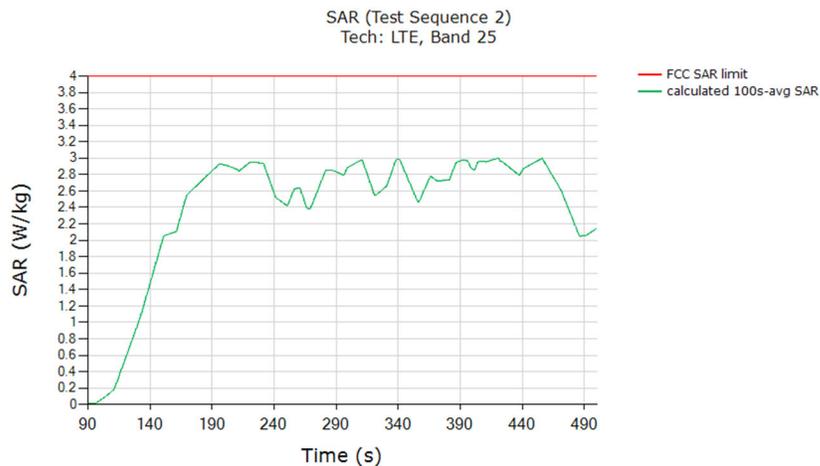


|  | (W/kg) |
|--|--------|
| FCC 10gSAR limit   | 4.0    |
| Max 100s-time averaged 10gSAR (green curve)  | 2.998  |
| <b>Validated:</b> Max time averaged SAR (green curve) is within 1 dB device uncertainty of measured SAR at $P_{limit}$ (last column in Table 6-2). |        |

|  |   |   |               |  |
|--|---|---|---------------|--|
| FCC ID: ZNFF100TM                              | <b>PCTEST</b><br>Proud to be part of  element | <b>PART 2 RF EXPOSURE EVALUATION REPORT</b> | <b>LG</b>     | <b>Approved by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>1M2006150095-21-R1.ZNF | <b>Test Dates:</b><br>08/08/20 - 08/27/20     | <b>DUT Type:</b><br>Portable Handset        | Page 56 of 67 |  |


## 9.1.2 LTE Band 48

### SAR test results for test sequence 1:

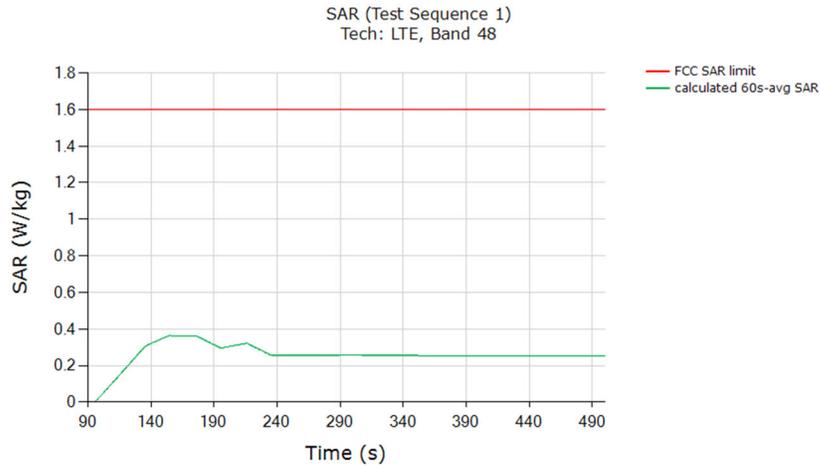

|  |        |
|--|--------|
|  | (W/kg) |
| FCC 1gSAR limit  | 1.6    |
| Max 60s-time averaged point 1gSAR (green curve)  | 0.365  |
| <b>Validated:</b> Max time averaged SAR (green curve) is within 1 dB device uncertainty of measured SAR at $P_{limit}$ (last column in Table 6-2). |        |

### SAR test results for test sequence 2:

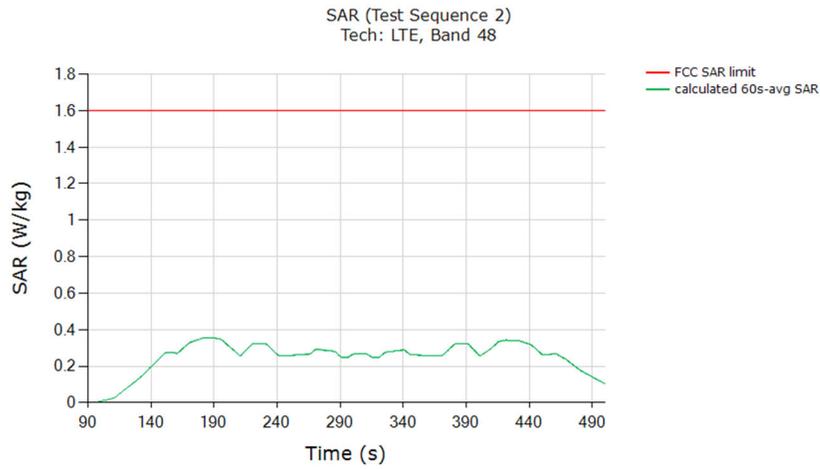


|  |        |
|--|--------|
|  | (W/kg) |
| FCC 1gSAR limit  | 1.6    |
| Max 60s-time averaged 1gSAR (green curve)  | 0.353  |
| <b>Validated:</b> Max time averaged SAR (green curve) is within 1 dB device uncertainty of measured SAR at $P_{limit}$ (last column in Table 6-2). |        |

|   |   |   |  |
|---|---|---|--|
| FCC ID: ZNFF100TM                       |  <b>PART 2 RF EXPOSURE EVALUATION REPORT</b> |  | <b>Approved by:</b><br>Quality Manager |
| Document S/N:<br>1M2006150095-21-R1.ZNF | <b>Test Dates:</b><br>08/08/20 - 08/27/20   | <b>DUT Type:</b><br>Portable Handset  | Page 57 of 67                          |

### 9.1.3


### UMTS B4

#### SAR test results for test sequence 1:

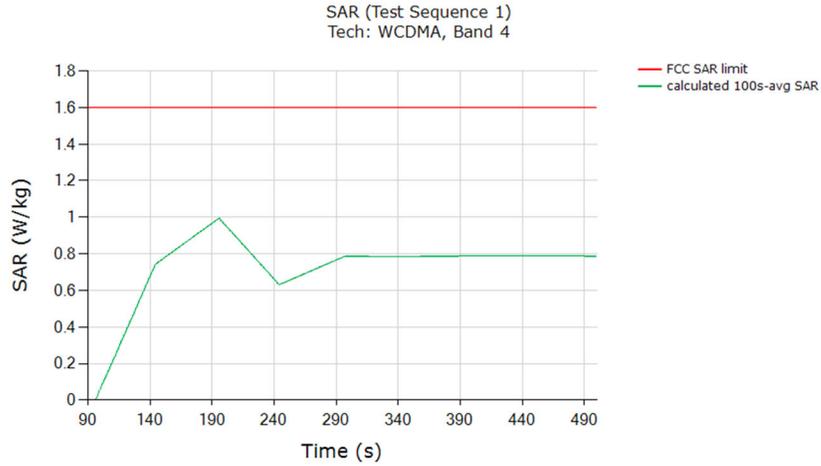

|  | (W/kg) |
|--|--------|
| FCC 1gSAR limit  | 1.6    |
| Max 100s-time averaged point 1gSAR (green curve)   | 0.994  |
| <b>Validated:</b> Max time averaged SAR (green curve) is within 1 dB device uncertainty of measured SAR at $P_{limit}$ (last column in Table 6-2). |        |

#### SAR test results for test sequence 2:

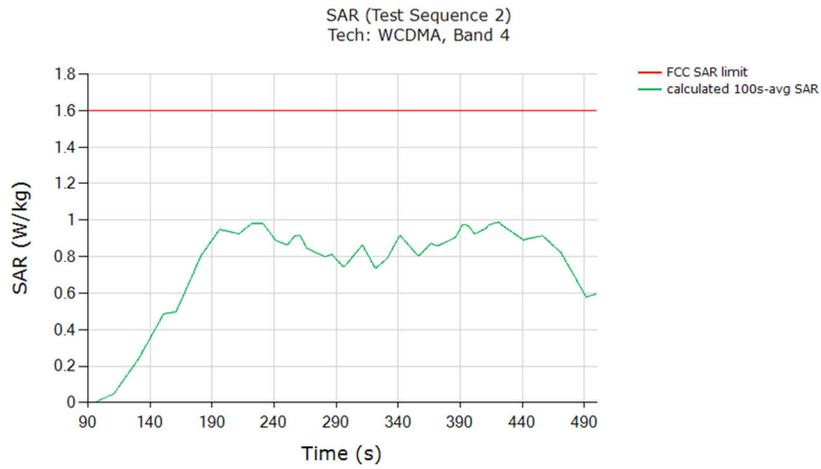


|  | (W/kg) |
|--|--------|
| FCC 1gSAR limit  | 1.6    |
| Max 100s-time averaged 1gSAR (green curve)   | 0.988  |
| <b>Validated:</b> Max time averaged SAR (green curve) is within 1 dB device uncertainty of measured SAR at $P_{limit}$ (last column in Table 6-2). |        |

|  |   |   |               |  |
|--|---|---|---------------|--|
| FCC ID: ZNFF100TM                              | <b>PCTEST</b><br>Proud to be part of  element | <b>PART 2 RF EXPOSURE EVALUATION REPORT</b> | <b>LG</b>     | <b>Approved by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>1M2006150095-21-R1.ZNF | <b>Test Dates:</b><br>08/08/20 - 08/27/20     | <b>DUT Type:</b><br>Portable Handset        | Page 58 of 67 |  |

### 9.1.4


### UMTS B2

#### SAR test results for test sequence 1:

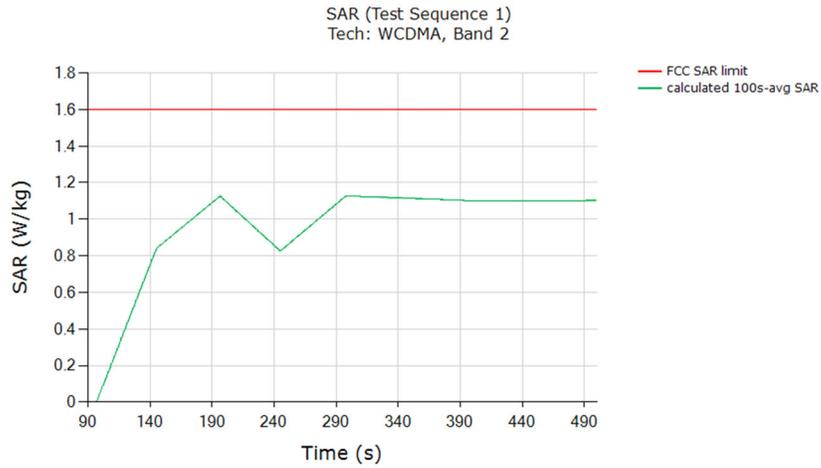

|  | (W/kg) |
|--|--------|
| FCC 1gSAR limit  | 1.6    |
| Max 100s-time averaged point 1gSAR (green curve)   | 1.128  |
| <b>Validated:</b> Max time averaged SAR (green curve) is within 1 dB device uncertainty of measured SAR at $P_{limit}$ (last column in Table 6-2). |        |

#### SAR test results for test sequence 2:

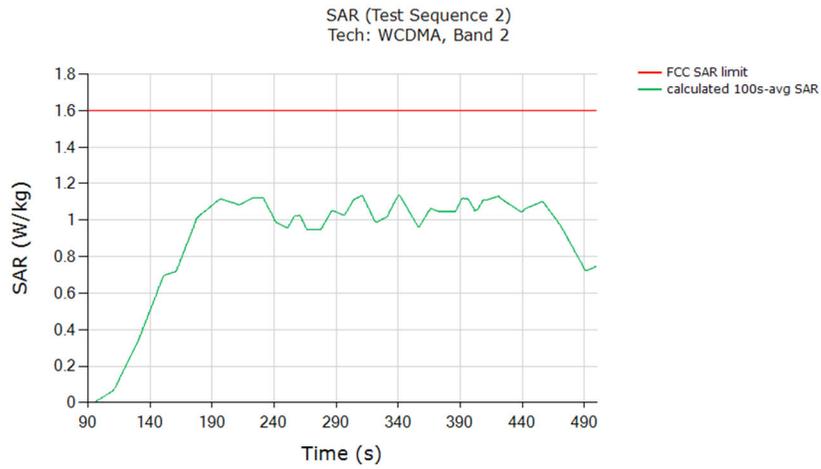


|  | (W/kg) |
|--|--------|
| FCC 1gSAR limit  | 1.6    |
| Max 100s-time averaged 1gSAR (green curve)   | 1.135  |
| <b>Validated:</b> Max time averaged SAR (green curve) is within 1 dB device uncertainty of measured SAR at $P_{limit}$ (last column in Table 6-2). |        |

|  |   |   |               |  |
|--|---|---|---------------|--|
| FCC ID: ZNFF100TM                              | <b>PCTEST</b><br>Proud to be part of  element | <b>PART 2 RF EXPOSURE EVALUATION REPORT</b> | <b>LG</b>     | <b>Approved by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>1M2006150095-21-R1.ZNF | <b>Test Dates:</b><br>08/08/20 - 08/27/20     | <b>DUT Type:</b><br>Portable Handset        | Page 59 of 67 |  |


## 9.1.5 CDMA/EVDO BC1

### SAR test results for test sequence 1:

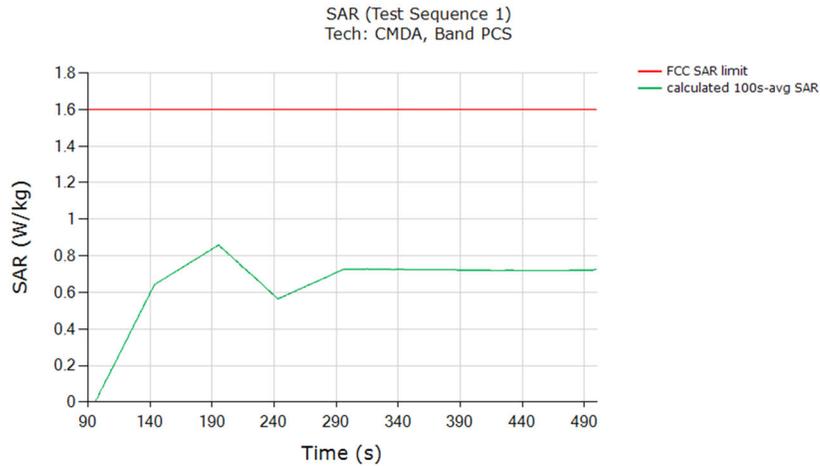

|  | (W/kg) |
|--|--------|
| FCC 1gSAR limit  | 1.6    |
| Max 100s-time averaged point 1gSAR (green curve)   | 0.858  |
| <b>Validated:</b> Max time averaged SAR (green curve) is within 1 dB device uncertainty of measured SAR at $P_{limit}$ (last column in Table 6-2). |        |

### SAR test results for test sequence 2:

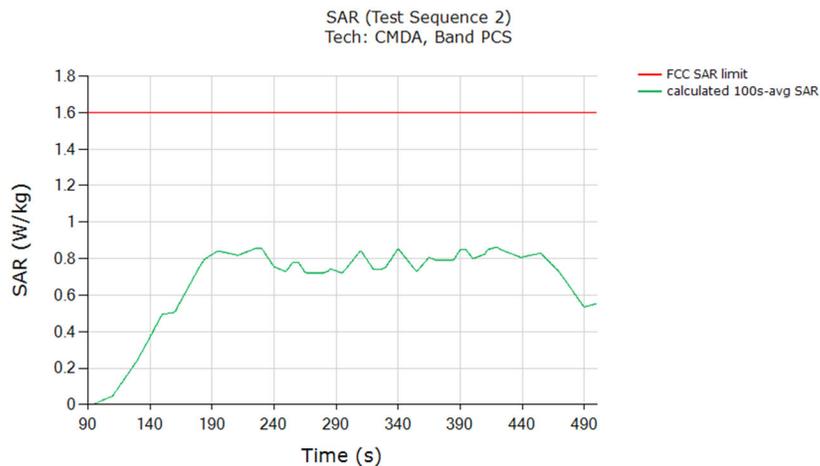


|  | (W/kg) |
|--|--------|
| FCC 1gSAR limit  | 1.6    |
| Max 100s-time averaged 1gSAR (green curve)   | 0.863  |
| <b>Validated:</b> Max time averaged SAR (green curve) is within 1 dB device uncertainty of measured SAR at $P_{limit}$ (last column in Table 6-2). |        |

|  |   |   |               |  |
|--|---|---|---------------|--|
| FCC ID: ZNFF100TM                              | <b>PCTEST</b><br>Proud to be part of  element | <b>PART 2 RF EXPOSURE EVALUATION REPORT</b> | <b>LG</b>     | <b>Approved by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>1M2006150095-21-R1.ZNF | <b>Test Dates:</b><br>08/08/20 - 08/27/20     | <b>DUT Type:</b><br>Portable Handset        | Page 60 of 67 |  |

9.1.6


NR n66

SAR test results for test sequence 1:

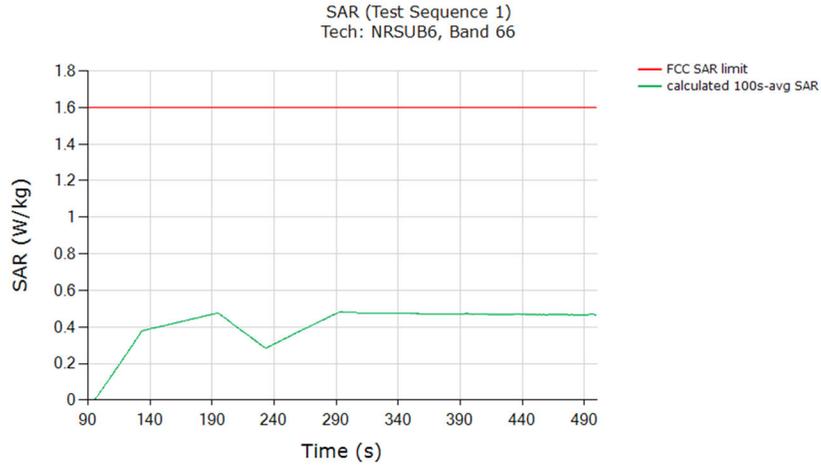

|   |        |
|---|--------|
|   | (W/kg) |
| FCC 1gSAR limit   | 1.6    |
| Max 100s-time averaged point 1gSAR (green curve)  | 0.481  |
| <b>Validated:</b> Max time averaged SAR (green curve) is within 1dB device uncertainty of 75% (with 3dB <i>Reserve_power_margin</i> setting) of the measured SAR at $P_{limit}$ (last column in Table 6-2). |        |

SAR test results for test sequence 2:

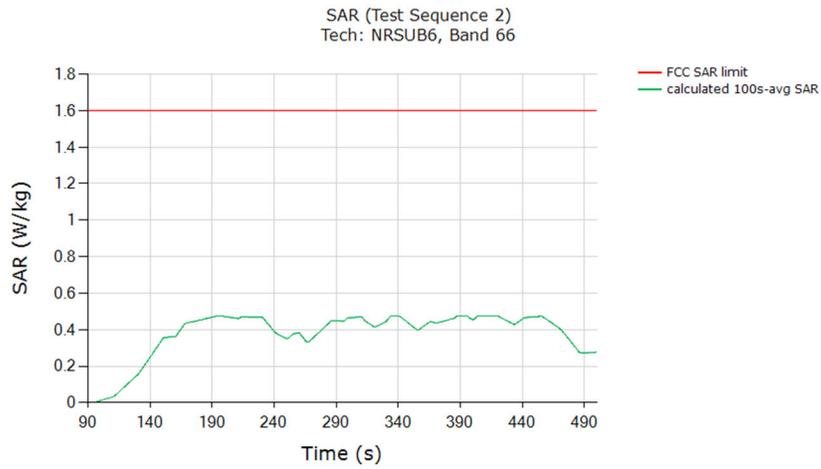


|   |        |
|---|--------|
|   | (W/kg) |
| FCC 1gSAR limit   | 1.6    |
| Max 100s-time averaged 1gSAR (green curve)  | 0.476  |
| <b>Validated:</b> Max time averaged SAR (green curve) is within 1dB device uncertainty of 75% (with 3dB <i>Reserve_power_margin</i> setting) of the measured SAR at $P_{limit}$ (last column in Table 6-2). |        |

|  |   |   |               |  |
|--|---|---|---------------|--|
| FCC ID: ZNFF100TM                              | <b>PCTEST</b><br>Proud to be part of  element | <b>PART 2 RF EXPOSURE EVALUATION REPORT</b> | <b>LG</b>     | <b>Approved by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>1M2006150095-21-R1.ZNF | <b>Test Dates:</b><br>08/08/20 - 08/27/20     | <b>DUT Type:</b><br>Portable Handset        | Page 61 of 67 |  |


**9.1.7 NR n2**

**SAR test results for test sequence 1:**

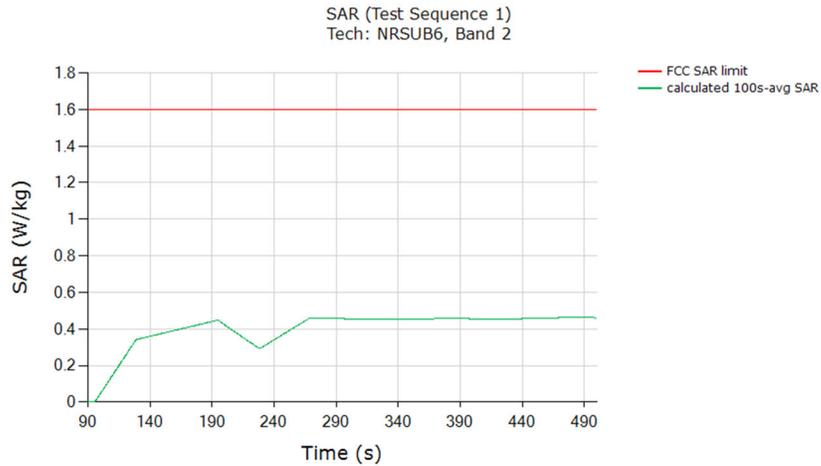

|   |        |
|---|--------|
|   | (W/kg) |
| FCC 1gSAR limit   | 1.6    |
| Max 100s-time averaged point 1gSAR (green curve)  | 0.464  |
| <b>Validated:</b> Max time averaged SAR (green curve) is within 1dB device uncertainty of 75% (with 3dB <i>Reserve_power_margin</i> setting) of the measured SAR at $P_{limit}$ (last column in Table 6-2). |        |

**SAR test results for test sequence 2:**

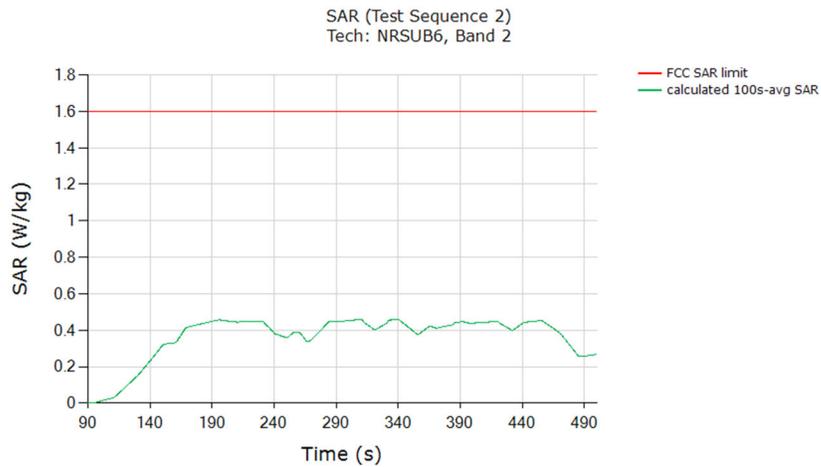

|   |        |
|---|--------|
|   | (W/kg) |
| FCC 1gSAR limit   | 1.6    |
| Max 100s-time averaged 1gSAR (green curve)  | 0.460  |
| <b>Validated:</b> Max time averaged SAR (green curve) is within 1dB device uncertainty of 75% (with 3dB <i>Reserve_power_margin</i> setting) of the measured SAR at $P_{limit}$ (last column in Table 6-2). |        |

|  |   |   |               |  |
|--|---|---|---------------|--|
| FCC ID: ZNFF100TM                              | <b>PCTEST</b><br>Proud to be part of  element | <b>PART 2 RF EXPOSURE EVALUATION REPORT</b> | <b>LG</b>     | <b>Approved by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>1M2006150095-21-R1.ZNF | <b>Test Dates:</b><br>08/08/20 - 08/27/20     | <b>DUT Type:</b><br>Portable Handset        | Page 62 of 67 |  |

10

EQUIPMENT LIST

| Manufacturer            | Model             | Description                                   | Cal Date   | Cal Interval | Cal Due    | Serial Number         |
|-------------------------|-------------------|---|------------|--------------|------------|-----------------------|
| Agilent                 | 8594A             | (9kHz-2.9GHz) Spectrum Analyzer               | N/A        | N/A          | N/A        | 3051A00187            |
| Agilent                 | E4438C            | ESG Vector Signal Generator                   | 3/8/2019   | Biennial     | 3/8/2021   | MY42082385            |
| Agilent                 | N9020A            | MXA Signal Analyzer                           | 12/19/2019 | Annual       | 12/19/2020 | MY48010233            |
| Agilent                 | N5182A            | MXG Vector Signal Generator                   | 2/19/2020  | Annual       | 2/19/2021  | MY47420651            |
| Agilent                 | 8753ES            | S-Parameter Network Analyzer                  | 12/31/2019 | Annual       | 12/31/2020 | US39170122            |
| Agilent                 | N5182A            | MXG Vector Signal Generator                   | 5/13/2020  | Annual       | 5/13/2021  | MY47420603            |
| Agilent                 | E4438C            | ESG Vector Signal Generator                   | 3/8/2019   | Biennial     | 3/8/2021   | MY42082385            |
| Agilent                 | E4438C            | ESG Vector Signal Generator                   | 3/11/2019  | Biennial     | 3/11/2021  | MY45090700            |
| Agilent                 | 8753ES            | S-Parameter Network Analyzer                  | 1/16/2020  | Annual       | 1/16/2021  | US39170118            |
| Agilent                 | 8753ES            | S-Parameter Vector Network Analyzer           | 9/19/2019  | Annual       | 9/19/2020  | MY40003841            |
| Amplifier Research      | 15S1G6            | Amplifier                                     | CBT        | N/A          | CBT        | 433972                |
| Amplifier Research      | 15S1G6            | Amplifier                                     | CBT        | N/A          | CBT        | 433974                |
| Anritsu                 | ML2495A           | Power Meter                                   | 12/17/2019 | Annual       | 12/17/2020 | 941001                |
| Anritsu                 | MA24106A          | USB Power Sensor                              | 2/27/2020  | Annual       | 2/27/2021  | 1520501               |
| Anritsu                 | MA24106A          | USB Power Sensor                              | 2/27/2020  | Annual       | 2/27/2021  | 1520503               |
| Anritsu                 | ML2496A           | Power Meter                                   | 12/17/2019 | Annual       | 12/17/2020 | 1138001               |
| Anritsu                 | MA2411B           | Pulse Power Sensor                            | 12/4/2019  | Annual       | 12/4/2020  | 0846215               |
| Anritsu                 | MA2411B           | Pulse Power Sensor                            | 12/4/2019  | Annual       | 12/4/2020  | 1126066               |
| COMTECH                 | AR85729-5/5759B   | Solid State Amplifier                         | CBT        | N/A          | CBT        | M3W1A00-1002          |
| COMTECH                 | AR85729-5         | Solid State Amplifier                         | CBT        | N/A          | CBT        | M155A00-009           |
| Control Company         | 4352              | Ultra Long Stem Thermometer                   | 11/29/2018 | Biennial     | 11/29/2020 | 181766801             |
| Control Company         | 4040              | Therm./ Clock/ Humidity Monitor               | 10/9/2018  | Biennial     | 10/9/2020  | 181647811             |
| Control Company         | 4352              | Long Stem Thermometer                         | 6/26/2019  | Biennial     | 6/26/2021  | 192282753             |
| K & L                   | 11SH10-1300/U4000 | High Pass Filter                              | N/A        | N/A          | N/A        | 11SH10-1300/U4000 - 2 |
| Keysight Technologies   | 772D              | Dual Directional Coupler                      | CBT        | N/A          | CBT        | MY52180215            |
| Keysight Technologies   | E7515B            | UXM 5G Wireless Test Platform                 | 6/11/2019  | Annual       | 12/11/2020 | MY59150289            |
| Keysight Technologies   | M1740A            | mmWave Transceiver                            | 5/7/2019   | Annual       | 11/7/2020  | MY58481076            |
| Keysight Technologies   | M1740A            | mmWave Transceiver                            | 5/7/2019   | Annual       | 11/7/2020  | MY58481133            |
| Keysight Technologies   | E7770A            | Common Interface Unit                         | 4/29/2019  | Annual       | 10/29/2020 | MY58290483            |
| Krytar                  | 110067006         | Directional Coupler, 10 - 67 GHz              | N/A        | N/A          | N/A        | 200391                |
| MCL                     | BW-N6W5+          | 6dB Attenuator                                | CBT        | N/A          | CBT        | 1139                  |
| Mini Circuits           | ZA2PD2-63-S+      | Power Splitter                                | CBT        | N/A          | CBT        | SUU64901930           |
| Mini Circuits           | ZAPD-2-272-S+     | Power Splitter                                | CBT        | N/A          | CBT        | SF702001405           |
| MiniCircuits            | NLP-1200+         | Low Pass Filter                               | N/A        | N/A          | N/A        | VUU78201318           |
| MiniCircuits            | SLP-2400+         | Low Pass Filter                               | CBT        | N/A          | CBT        | R8979500903           |
| MiniCircuits            | VLf-6000+         | Low Pass Filter                               | CBT        | N/A          | CBT        | N/A                   |
| Mini-Circuits           | BW-N20W5+         | DC to 18 GHz Precision Fixed 20 dB Attenuator | CBT        | N/A          | CBT        | N/A                   |
| Mini-Circuits           | NLP-2950+         | Low Pass Filter DC to 2700 MHz                | CBT        | N/A          | CBT        | N/A                   |
| Mini-Circuits           | NLP-1200+         | Low Pass Filter DC to 1000 MHz                | CBT        | N/A          | CBT        | N/A                   |
| Mini-Circuits           | BW-N20W5          | Power Attenuator                              | CBT        | N/A          | CBT        | 1226                  |
| Narda                   | 4216-10           | Directional Coupler, 0.5 to 8.0 GHz, 10 dB    | 5/16/2019  | Annual       | 11/16/2020 | 01492                 |
| Narda                   | 4216-10           | Directional Coupler, 0.5 to 8.0 GHz, 10 dB    | 5/16/2019  | Annual       | 11/16/2020 | 01493                 |
| Narda                   | 4772-3            | Attenuator                                    | CBT        | N/A          | CBT        | 9406                  |
| Narda                   | BW-53W2           | Attenuator                                    | CBT        | N/A          | CBT        | 120                   |
| Narda                   | BW-510W2+         | Attenuator                                    | CBT        | N/A          | CBT        | 831                   |
| Narda                   | 4014C-6           | 4 - 8 GHz SMA 6 dB Directional Coupler        | CBT        | N/A          | CBT        | N/A                   |
| Newmark System          | NSC-G2            | Motion Controller                             | CBT        | N/A          | CBT        | 1007-D                |
| Pasternack              | PE2208-6          | Bidirectional Coupler                         | CBT        | N/A          | CBT        | N/A                   |
| Pasternack              | PE2209-10         | Bidirectional Coupler                         | CBT        | N/A          | CBT        | N/A                   |
| Ramsey Electronics, LLC | STE6300           | Shielded Test Enclosure                       | N/A        | N/A          | N/A        | 1310                  |
| Rohde & Schwarz         | CMW500            | Radio Communication Tester                    | 3/27/2020  | Annual       | 3/27/2021  | 128633                |
| Rohde & Schwarz         | NRP8S             | 3-Path Dipole Power Sensor                    | 6/1/2019   | Annual       | 12/1/2020  | 108168                |
| Rohde & Schwarz         | NRP8S             | 3-Path Dipole Power Sensor                    | 6/1/2019   | Annual       | 12/1/2020  | 108523                |
| Rohde & Schwarz         | NRP8S             | 3-Path Dipole Power Sensor                    | 6/10/2020  | Annual       | 6/10/2021  | 109322                |
| Rohde & Schwarz         | NRP50S            | 3-Path Dipole Power Sensor                    | 6/1/2019   | Annual       | 12/1/2020  | 101164                |
| SPEAG                   | DAK-3.5           | Dielectric Assessment Kit                     | 10/22/2019 | Annual       | 10/22/2020 | 1091                  |
| SPEAG                   | D1750V2           | 1750 MHz SAR Dipole                           | 10/22/2018 | Biennial     | 10/22/2020 | 1150                  |
| SPEAG                   | D1900V2           | 1900 MHz SAR Dipole                           | 2/21/2019  | Biennial     | 2/21/2021  | 5d148                 |
| SPEAG                   | D3700V2           | 3700 MHz SAR Dipole                           | 1/21/2020  | Annual       | 1/21/2021  | 1067                  |
| SPEAG                   | DAE4              | Dasy Data Acquisition Electronics             | 4/15/2020  | Annual       | 4/15/2021  | 1582                  |
| SPEAG                   | DAE4              | Dasy Data Acquisition Electronics             | 12/18/2019 | Annual       | 12/18/2020 | 859                   |
| SPEAG                   | EX3DV4            | SAR Probe                                     | 3/18/2020  | Annual       | 3/18/2021  | 7526                  |

Notes:

1. CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler, or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.
2. Each equipment item is used solely within its respective calibration period.
3. Due to the worldwide pandemic caused by the novel SAR-CoV-2 virus (COVID-19), special calibration extensions have been permitted by A2LA. Some equipment had its calibration period extended accordingly and will be calibrated when possible.

|  |  |   |   |  |
|--|--|---|---|--|
| FCC ID: ZNFF100TM                              |  <b>PCTEST</b><br>Proud to be part of  | <b>PART 2 RF EXPOSURE EVALUATION REPORT</b> |  | <b>Approved by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>1M2006150095-21-R1.ZNF | <b>Test Dates:</b><br>08/08/20 - 08/27/20  | <b>DUT Type:</b><br>Portable Handset        | Page 63 of 67   |  |

# 11 MEASUREMENT UNCERTAINTIES

## For SAR Measurements

| a   | c             | d              | e=<br>f(d,k) | f                     | g                        | h =<br>c x f/e                 | i =<br>c x g/e                   | k              |
|---|---------------|----------------|--------------|-----------------------|--------------------------|--------------------------------|----------------------------------|----------------|
| Uncertainty Component   | Tol.<br>(± %) | Prob.<br>Dist. | Div.         | c <sub>i</sub><br>1gm | c <sub>i</sub><br>10 gms | 1gm<br>u <sub>i</sub><br>(± %) | 10gms<br>u <sub>i</sub><br>(± %) | v <sub>i</sub> |
| <b>Measurement System</b>   |               |                |              |                       |                          |                                |                                  |                |
| Probe Calibration   | 6.55          | N              | 1            | 1.0                   | 1.0                      | 6.6                            | 6.6                              | ∞              |
| Axial Isotropy  | 0.25          | N              | 1            | 0.7                   | 0.7                      | 0.2                            | 0.2                              | ∞              |
| Hemishperical Isotropy  | 1.3           | N              | 1            | 0.7                   | 0.7                      | 0.9                            | 0.9                              | ∞              |
| Boundary Effect   | 2.0           | R              | 1.73         | 1.0                   | 1.0                      | 1.2                            | 1.2                              | ∞              |
| Linearity   | 0.3           | N              | 1            | 1.0                   | 1.0                      | 0.3                            | 0.3                              | ∞              |
| System Detection Limits   | 0.25          | R              | 1.73         | 1.0                   | 1.0                      | 0.1                            | 0.1                              | ∞              |
| Readout Electronics   | 0.3           | N              | 1            | 1.0                   | 1.0                      | 0.3                            | 0.3                              | ∞              |
| Response Time   | 0.8           | R              | 1.73         | 1.0                   | 1.0                      | 0.5                            | 0.5                              | ∞              |
| Integration Time  | 2.6           | R              | 1.73         | 1.0                   | 1.0                      | 1.5                            | 1.5                              | ∞              |
| RF Ambient Conditions - Noise   | 3.0           | R              | 1.73         | 1.0                   | 1.0                      | 1.7                            | 1.7                              | ∞              |
| RF Ambient Conditions - Reflections   | 3.0           | R              | 1.73         | 1.0                   | 1.0                      | 1.7                            | 1.7                              | ∞              |
| Probe Positioner Mechanical Tolerance   | 0.4           | R              | 1.73         | 1.0                   | 1.0                      | 0.2                            | 0.2                              | ∞              |
| Probe Positioning w/ respect to Phantom                                       | 6.7           | R              | 1.73         | 1.0                   | 1.0                      | 3.9                            | 3.9                              | ∞              |
| Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation | 4.0           | R              | 1.73         | 1.0                   | 1.0                      | 2.3                            | 2.3                              | ∞              |
| <b>Test Sample Related</b>  |               |                |              |                       |                          |                                |                                  |                |
| Test Sample Positioning   | 2.7           | N              | 1            | 1.0                   | 1.0                      | 2.7                            | 2.7                              | 35             |
| Device Holder Uncertainty   | 1.67          | N              | 1            | 1.0                   | 1.0                      | 1.7                            | 1.7                              | 5              |
| Output Power Variation - SAR drift measurement                                | 5.0           | R              | 1.73         | 1.0                   | 1.0                      | 2.9                            | 2.9                              | ∞              |
| SAR Scaling   | 0.0           | R              | 1.73         | 1.0                   | 1.0                      | 0.0                            | 0.0                              | ∞              |
| <b>Phantom &amp; Tissue Parameters</b>  |               |                |              |                       |                          |                                |                                  |                |
| Phantom Uncertainty (Shape & Thickness tolerances)                            | 7.6           | R              | 1.73         | 1.0                   | 1.0                      | 4.4                            | 4.4                              | ∞              |
| Liquid Conductivity - measurement uncertainty                                 | 4.2           | N              | 1            | 0.78                  | 0.71                     | 3.3                            | 3.0                              | 10             |
| Liquid Permittivity - measurement uncertainty                                 | 4.1           | N              | 1            | 0.23                  | 0.26                     | 1.0                            | 1.1                              | 10             |
| Liquid Conductivity - Temperature Uncertainty                                 | 3.4           | R              | 1.73         | 0.78                  | 0.71                     | 1.5                            | 1.4                              | ∞              |
| Liquid Permittivity - Temperature Uncertainty                                 | 0.6           | R              | 1.73         | 0.23                  | 0.26                     | 0.1                            | 0.1                              | ∞              |
| Liquid Conductivity - deviation from target values                            | 5.0           | R              | 1.73         | 0.64                  | 0.43                     | 1.8                            | 1.2                              | ∞              |
| Liquid Permittivity - deviation from target values                            | 5.0           | R              | 1.73         | 0.60                  | 0.49                     | 1.7                            | 1.4                              | ∞              |
| <b>Combined Standard Uncertainty (k=1)</b>                                    | RSS           |                |              |                       |                          | 11.5                           | 11.3                             | 60             |
| <b>Expanded Uncertainty</b><br>(95% CONFIDENCE LEVEL)                         | k=2           |                |              |                       |                          | 23.0                           | 22.6                             |                |

|  |  |   |   |  |
|--|--|---|---|--|
| FCC ID: ZNFF100TM                              |  <b>PCTEST</b><br>Proud to be part of element | <b>PART 2 RF EXPOSURE EVALUATION REPORT</b> |  <b>LG</b> | <b>Approved by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>1M2006150095-21-R1.ZNF | <b>Test Dates:</b><br>08/08/20 - 08/27/20  | <b>DUT Type:</b><br>Portable Handset        | Page 64 of 67   |  |

## 12 CONCLUSION

### Measurement Conclusion

The SAR evaluation indicates that the DUT complies with the RF radiation exposure limits of the FCC and Innovation, Science, and Economic Development Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

|  |  |   |   |  |
|--|--|---|---|--|
| FCC ID: ZNFF100TM                              |  <b>PCTEST</b><br>Proud to be part of  | <b>PART 2 RF EXPOSURE EVALUATION<br/>REPORT</b> |  <b>LG</b> | <b>Approved by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>1M2006150095-21-R1.ZNF | <b>Test Dates:</b><br>08/08/20 - 08/27/20  | <b>DUT Type:</b><br>Portable Handset            | Page 65 of 67   |  |

## 13 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1526-2013, IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1 -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

|  |  |   |   |  |
|--|--|---|---|--|
| FCC ID: ZNFF100TM                              |  <b>PCTEST</b><br>Proud to be part of  | <b>PART 2 RF EXPOSURE EVALUATION REPORT</b> |  <b>LG</b> | <b>Approved by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>1M2006150095-21-R1.ZNF | <b>Test Dates:</b><br>08/08/20 - 08/27/20  | <b>DUT Type:</b><br>Portable Handset        | Page 66 of 67   |  |

- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1: Devices used next to the ear (Frequency range of 300 MHz to 6 GHz), July 2016.
- [21] Innovation, Science, Economic Development Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2015
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

|  |  |   |   |  |
|--|--|---|---|--|
| <b>FCC ID:</b> ZNFF100TM                       |  <b>PCTEST</b><br>Proud to be part of  | <b>PART 2 RF EXPOSURE EVALUATION REPORT</b> |  <b>LG</b> | <b>Approved by:</b><br>Quality Manager |
| <b>Document S/N:</b><br>1M2006150095-21-R1.ZNF | <b>Test Dates:</b><br>08/08/20 - 08/27/20  | <b>DUT Type:</b><br>Portable Handset        | Page 67 of 67   |  |

## APPENDIX A: VERIFICATION PLOTS

# PCTEST

Date: 08-10-2020

1750MHz Body Verification

## Medium

| Frequency [MHz] | TSL       | TSL Conductivity [S/m] | TSL Permittivity | Ambient Temperature [C] | Tissue Temperature [C] |
|-----------------|-----------|------------------------|------------------|-------------------------|------------------------|
| 1750.0          | 1750 Body | 1.48                   | 54.0             | 23.1                    | 21.6                   |

## Exposure Conditions

| Phantom Section | Test Distance [mm] | Power [dBm] | Communication System, UID |
|-----------------|--------------------|-------------|---------------------------|
| Flat            | 10                 | 20.0        | CW, 0                     |

## Hardware Setup


| Phantom                      | Dipole            | Probe, Calibration Date     | Conversion Factor | DAE, Calibration Date  |
|------------------------------|-------------------|-----------------------------|-------------------|------------------------|
| Twin-SAM V8.0 (Right) - 1981 | D1 750V2 - SN1150 | EX3DV4 - SN7526, 2020-03-18 | 7.62              | DAE4 Sn859, 2019-12-18 |

## Scans Setup

|                     | Area Scan   | Zoom Scan          |
|---------------------|-------------|--------------------|
| Grid Extents [mm]   | 60.0 x 90.0 | 50.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0 | 6.0 x 6.0 x 5.0    |
| Sensor Surface [mm] | 3.0         | 1.4                |
| Graded Grid         | No          | No                 |
| Grading Ratio       | n/a         | n/a                |

## Measurement Results

|                 | Zoom Scan |
|-----------------|-----------|
| psSAR1g [W/Kg]  | 3.89      |
| psSAR10g [W/Kg] | 2.07      |
| Dev. 1g [%]     | 6.28      |

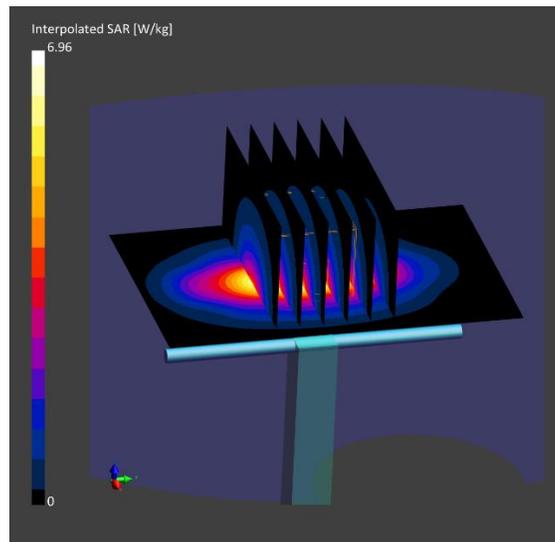

# PCTEST

Date: 08-25-2020

1750MHz Body Verification

## Medium

| Frequency [MHz] | TSL       | TSL Conductivity [S/m] | TSL Permittivity | Ambient Temperature [C] | Tissue Temperature [C] |
|-----------------|-----------|------------------------|------------------|-------------------------|------------------------|
| 1750.0          | 1750 Body | 1.44                   | 52.8             | 22.7                    | 21.8                   |

## Exposure Conditions

| Phantom Section | Test Distance [mm] | Power [dBm] | Communication System, UID |
|-----------------|--------------------|-------------|---------------------------|
| Flat            | 10                 | 20.0        | CW, 0                     |

## Hardware Setup


| Phantom              | Dipole           | Probe, Calibration Date     | Conversion Factor | DAE, Calibration Date   |
|----------------------|------------------|-----------------------------|-------------------|-------------------------|
| Twin-SAM V8.0 - 1978 | D1750V2 - SN1150 | EX3DV4 - SN7526, 2020-03-18 | 7.62              | DAE4 Sn1582, 2020-04-15 |

## Scans Setup

|                     | Area Scan   | Zoom Scan          |
|---------------------|-------------|--------------------|
| Grid Extents [mm]   | 60.0 x 90.0 | 50.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0 | 6.0 x 6.0 x 5.0    |
| Sensor Surface [mm] | 3.0         | 1.4                |
| Graded Grid         | No          | No                 |
| Grading Ratio       | n/a         | n/a                |

## Measurement Results

|                 | Zoom Scan |
|-----------------|-----------|
| psSAR1g [W/Kg]  | 3.67      |
| psSAR10g [W/Kg] | 1.96      |
| Dev. 1g [%]     | 0.27      |

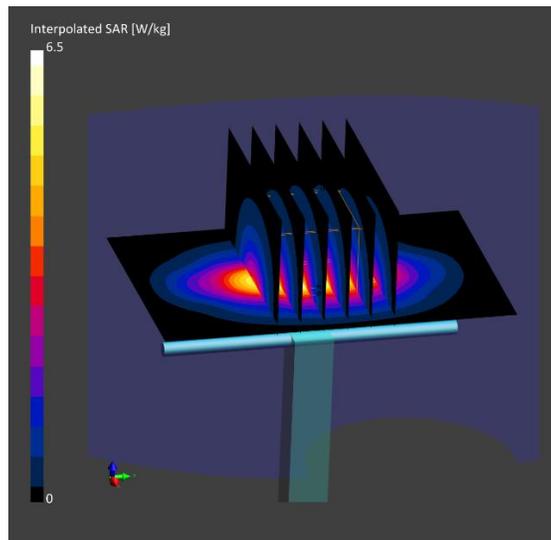

# PCTEST

Date: 08-10-2020

1900MHz Body Verification

## Medium

| Frequency [MHz] | TSL       | TSL Conductivity [S/m] | TSL Permittivity | Ambient Temperature [C] | Tissue Temperature [C] |
|-----------------|-----------|------------------------|------------------|-------------------------|------------------------|
| 1900.0          | 1900 Body | 1.58                   | 53.8             | 23.1                    | 21.6                   |

## Exposure Conditions

| Phantom Section | Test Distance [mm] | Power [dBm] | Communication System, UID |
|-----------------|--------------------|-------------|---------------------------|
| Flat            | 10                 | 20.0        | CW, 0                     |

## Hardware Setup


| Phantom                      | Dipole            | Probe, Calibration Date     | Conversion Factor | DAE, Calibration Date  |
|------------------------------|-------------------|-----------------------------|-------------------|------------------------|
| Twin-SAM V8.0 (Right) - 1981 | D1900V2 - SN5d148 | EX3DV4 - SN7526, 2020-03-18 | 7.33              | DAE4 Sn859, 2019-12-18 |

## Scans Setup

|                     | Area Scan   | Zoom Scan          |
|---------------------|-------------|--------------------|
| Grid Extents [mm]   | 60.0 x 90.0 | 50.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0 | 6.0 x 6.0 x 5.0    |
| Sensor Surface [mm] | 3.0         | 1.4                |
| Graded Grid         | No          | No                 |
| Grading Ratio       | n/a         | n/a                |

## Measurement Results

|                 | Zoom Scan |
|-----------------|-----------|
| psSAR1g [W/Kg]  | 4.17      |
| psSAR10g [W/Kg] | 2.15      |
| Dev. 1g [%]     | 6.65      |

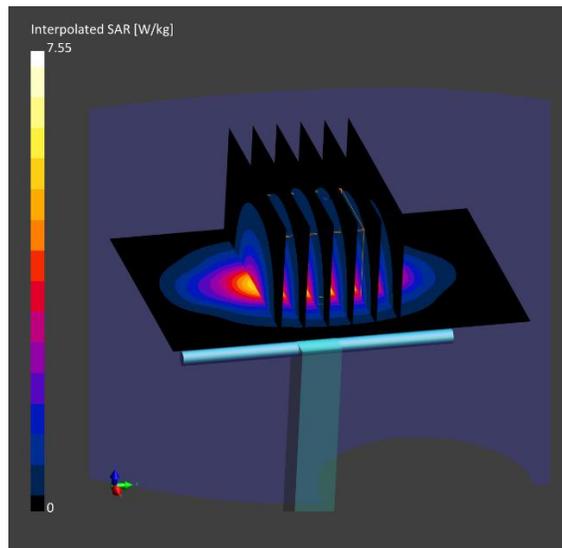

# PCTEST

Date: 08-24-2020

1900MHz Body Verification

## Medium

| Frequency [MHz] | TSL       | TSL Conductivity [S/m] | TSL Permittivity | Ambient Temperature [C] | Tissue Temperature [C] |
|-----------------|-----------|------------------------|------------------|-------------------------|------------------------|
| 1900.0          | 1900 Body | 1.58                   | 53.0             | 22.2                    | 21.3                   |

## Exposure Conditions

| Phantom Section | Test Distance [mm] | Power [dBm] | Communication System, UID |
|-----------------|--------------------|-------------|---------------------------|
| Flat            | 10                 | 20.0        | CW, 0                     |

## Hardware Setup


| Phantom                      | Dipole            | Probe, Calibration Date     | Conversion Factor | DAE, Calibration Date  |
|------------------------------|-------------------|-----------------------------|-------------------|------------------------|
| Twin-SAM V8.0 (Right) - 1981 | D1900V2 - SN5d148 | EX3DV4 - SN7526, 2020-03-18 | 7.33              | DAE4 Sn859, 2019-12-18 |

## Scans Setup

|                     | Area Scan   | Zoom Scan          |
|---------------------|-------------|--------------------|
| Grid Extents [mm]   | 60.0 x 90.0 | 50.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0 | 6.0 x 6.0 x 5.0    |
| Sensor Surface [mm] | 3.0         | 1.4                |
| Graded Grid         | No          | No                 |
| Grading Ratio       | n/a         | n/a                |

## Measurement Results

|                 | Zoom Scan |
|-----------------|-----------|
| psSAR1g [W/Kg]  | 4.16      |
| psSAR10g [W/Kg] | 2.15      |
| Dev. 10g [%]    | 4.88      |

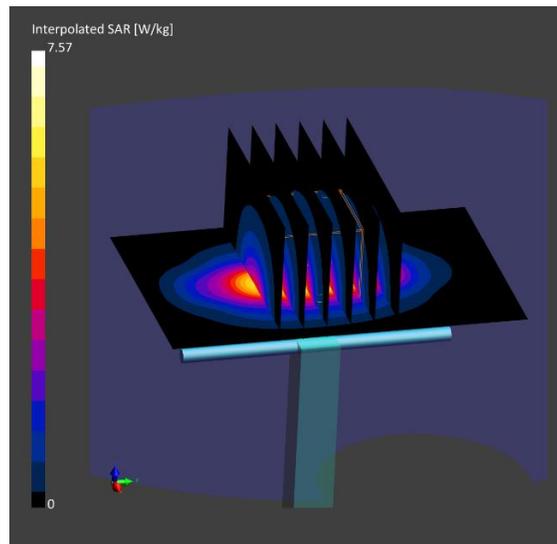

# PCTEST

Date: 08-25-2020

1900MHz Body Verification

## Medium

| Frequency [MHz] | TSL       | TSL Conductivity [S/m] | TSL Permittivity | Ambient Temperature [C] | Tissue Temperature [C] |
|-----------------|-----------|------------------------|------------------|-------------------------|------------------------|
| 1900.0          | 1900 Body | 1.55                   | 52.6             | 22.7                    | 21.8                   |

## Exposure Conditions

| Phantom Section | Test Distance [mm] | Power [dBm] | Communication System, UID |
|-----------------|--------------------|-------------|---------------------------|
| Flat            | 10                 | 20.0        | CW, 0                     |

## Hardware Setup


| Phantom              | Dipole            | Probe, Calibration Date     | Conversion Factor | DAE, Calibration Date   |
|----------------------|-------------------|-----------------------------|-------------------|-------------------------|
| Twin-SAM V8.0 - 1978 | D1900V2 - SN5d148 | EX3DV4 - SN7526, 2020-03-18 | 7.33              | DAE4 Sn1582, 2020-04-15 |

## Scans Setup

|                     | Area Scan   | Zoom Scan          |
|---------------------|-------------|--------------------|
| Grid Extents [mm]   | 60.0 x 90.0 | 50.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 15.0 x 15.0 | 6.0 x 6.0 x 5.0    |
| Sensor Surface [mm] | 3.0         | 1.4                |
| Graded Grid         | No          | No                 |
| Grading Ratio       | n/a         | n/a                |

## Measurement Results

|                 | Zoom Scan |
|-----------------|-----------|
| psSAR1g [W/Kg]  | 3.80      |
| psSAR10g [W/Kg] | 2.00      |
| Dev. 1g [%]     | -2.81     |

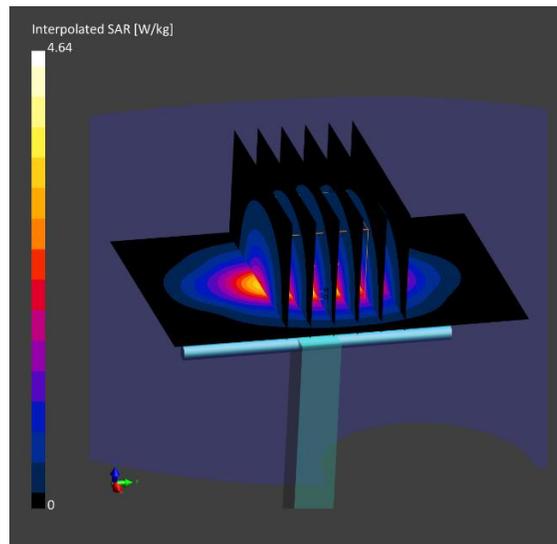

# PCTEST

Date: 08-27-2020

3700MHz Body Verification

## Medium

| Frequency [MHz] | TSL       | TSL Conductivity [S/m] | TSL Permittivity | Ambient Temperature [C] | Tissue Temperature [C] |
|-----------------|-----------|------------------------|------------------|-------------------------|------------------------|
| 3700.0          | 3700 Body | 3.39                   | 49.0             | 22.0                    | 19.5                   |

## Exposure Conditions

| Phantom Section | Test Distance [mm] | Power [dBm] | Communication System, UID |
|-----------------|--------------------|-------------|---------------------------|
| Flat            | 10                 | 20.0        | CW, 0                     |

## Hardware Setup


| Phantom                      | Dipole           | Probe, Calibration Date     | Conversion Factor | DAE, Calibration Date  |
|------------------------------|------------------|-----------------------------|-------------------|------------------------|
| Twin-SAM V8.0 (Right) - 1981 | D3700V2 - SN1067 | EX3DV4 - SN7526, 2020-03-18 | 5.8               | DAE4 Sn859, 2019-12-18 |

## Scans Setup

|                     | Area Scan   | Zoom Scan          |
|---------------------|-------------|--------------------|
| Grid Extents [mm]   | 40.0 x 80.0 | 50.0 x 30.0 x 30.0 |
| Grid Steps [mm]     | 10.0 x 10.0 | 4.0 x 4.0 x 1.4    |
| Sensor Surface [mm] | 3.0         | 1.4                |
| Graded Grid         | No          | Yes                |
| Grading Ratio       | n/a         | 1.4                |

## Measurement Results

|                 | Zoom Scan |
|-----------------|-----------|
| psSAR1g [W/Kg]  | 6.59      |
| psSAR10g [W/Kg] | 2.42      |
| Dev. 1g [%]     | 1.07      |

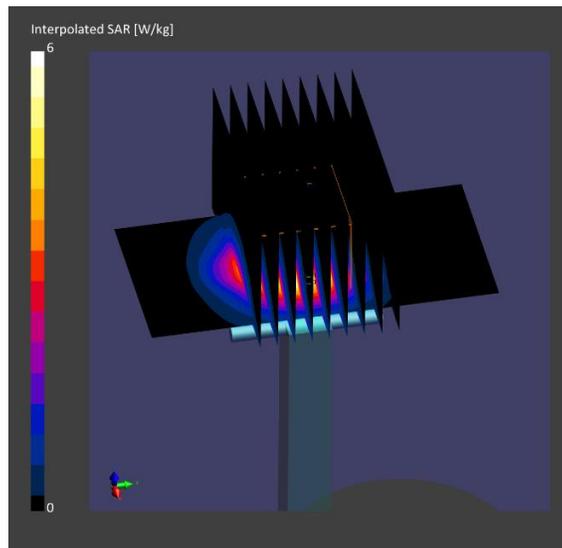

## APPENDIX B: SAR TISSUE SPECIFICATIONS

Measurement Procedure for Tissue verification:

- 1) The network analyzer and probe system were configured and calibrated.
- 2) The probe was immersed in the tissue. The tissue was placed in a nonmetallic container. Trapped air bubbles beneath the flange were minimized by placing the probe at a slight angle.
- 3) The complex admittance with respect to the probe aperture was measured
- 4) The complex relative permittivity  $\epsilon'$  can be calculated from the below equation (Pournaropoulos and Misra):

$$Y = \frac{j2\omega\epsilon_r\epsilon_0}{[\ln(b/a)]^2} \int_a^b \int_a^b \int_0^\pi \cos\phi' \frac{\exp[-j\omega r(\mu_0\epsilon_r'\epsilon_0)^{1/2}]}{r} d\phi' d\rho' d\rho$$

where  $Y$  is the admittance of the probe in contact with the sample, the primed and unprimed coordinates refer to source and observation points, respectively,  $r^2 = \rho^2 + \rho'^2 - 2\rho\rho' \cos\phi'$ ,  $\omega$  is the angular frequency, and  $j = \sqrt{-1}$ .

### 3 Composition / Information on ingredients

#### 3.2 Mixtures

**Description:** Aqueous solution with surfactants and inhibitors

**Declarable, or hazardous components:**

|  |   |           |
|--|---|-----------|
| CAS: 107-21-1<br>EINECS: 203-473-3<br>Reg.nr.: 01-2119456816-28-0000   | <b>Ethandiol</b><br>STOT RE 2, H373;<br>Acute Tox. 4, H302  | >1.0-4.9% |
| CAS: 68608-26-4<br>EINECS: 271-781-5<br>Reg.nr.: 01-2119527859-22-0000 | <b>Sodium petroleum sulfonate</b><br>Eye Irrit. 2, H319   | < 2.9%    |
| CAS: 107-41-5<br>EINECS: 203-489-0<br>Reg.nr.: 01-2119539582-35-0000   | <b>Hexylene Glycol / 2-Methyl-pentane-2,4-diol</b><br>Skin Irrit. 2, H315; Eye Irrit. 2, H319                         | < 2.9%    |
| CAS: 68920-66-1<br>NLP: 500-236-9<br>Reg.nr.: 01-2119489407-26-0000    | <b>Alkoxyated alcohol, &gt; C<sub>16</sub></b><br>Aquatic Chronic 2, H411;<br>Skin Irrit. 2, H315; Eye Irrit. 2, H319 | < 2.0%    |

**Additional information:**

For the wording of the listed risk phrases refer to section 16.

Not mentioned CAS-, EINECS- or registration numbers are to be regarded as Proprietary/Confidential.

The specific chemical identity and/or exact percentage concentration of proprietary components is withheld as a trade secret.

**Figure B -13-1**

Note: Liquid recipes are proprietary SPEAG. Since the composition is approximate to the actual liquids utilized, the manufacturer tissue-equivalent liquid data sheets are provided below.

|   |   |  |
|---|---|--|
| <b>FCC ID:</b> ZNFF100TM                  |  <b>PART 2 RF EXPOSURE EVALUATION REPORT</b>  | <b>Approved by:</b><br>Quality Manager |
| <b>Test Dates:</b><br>08/08/20 - 08/27/20 | <b>DUT Type:</b><br>Portable Handset  | Appendix B<br>Page 1 of 2              |

**Measurement Certificate / Material Test**

|              |  |
|--------------|--|
| Item Name    | Body Tissue Simulating Liquid (MBBL600-6000V6) |
| Product No.  | SL AAM U16 BC (Batch: 181029-1)                |
| Manufacturer | SPEAG  |



**Measurement Method**  
 TSL dielectric parameters measured using calibrated DAK probe.

**Target Parameters**  
 Target parameters as defined in the KDB 865664 compliance standard.

**Test Condition**  
 Ambient Condition 22°C ; 30% humidity  
 TSL Temperature 22°C  
 Test Date 30-Oct-18  
 Operator CL

**Additional Information**  
 TSL Density  
 TSL Heat-capacity

| f [MHz] | Measured |      |       | Target |       | Diff.to Target [%] |         |
|---------|----------|------|-------|--------|-------|--------------------|---------|
|         | e'       | e''  | sigma | eps    | sigma | Δ-eps              | Δ-sigma |
| 800     | 55.1     | 21.3 | 0.95  | 55.3   | 0.97  | -0.4               | -2.1    |
| 825     | 55.1     | 20.8 | 0.96  | 55.2   | 0.98  | -0.3               | -2.0    |
| 835     | 55.1     | 20.6 | 0.96  | 55.1   | 0.99  | 0.0                | -2.5    |
| 850     | 55.1     | 20.4 | 0.96  | 55.2   | 0.99  | -0.1               | -3.0    |
| 900     | 55.0     | 19.7 | 0.98  | 55.0   | 1.05  | 0.0                | -6.7    |
| 1400    | 54.2     | 15.6 | 1.22  | 54.1   | 1.28  | 0.2                | -4.7    |
| 1450    | 54.1     | 15.4 | 1.24  | 54.0   | 1.30  | 0.2                | -4.6    |
| 1500    | 54.1     | 15.3 | 1.27  | 53.9   | 1.33  | 0.3                | -4.5    |
| 1550    | 54.0     | 15.1 | 1.30  | 53.9   | 1.36  | 0.2                | -4.4    |
| 1600    | 53.9     | 15.0 | 1.33  | 53.8   | 1.39  | 0.2                | -4.3    |
| 1625    | 53.9     | 14.9 | 1.35  | 53.8   | 1.41  | 0.3                | -4.3    |
| 1640    | 53.9     | 14.9 | 1.36  | 53.7   | 1.42  | 0.3                | -4.2    |
| 1650    | 53.8     | 14.9 | 1.36  | 53.7   | 1.43  | 0.2                | -4.9    |
| 1700    | 53.8     | 14.8 | 1.40  | 53.6   | 1.46  | 0.4                | -4.1    |
| 1750    | 53.7     | 14.7 | 1.43  | 53.4   | 1.49  | 0.5                | -4.0    |
| 1800    | 53.7     | 14.6 | 1.46  | 53.3   | 1.52  | 0.8                | -3.9    |
| 1810    | 53.7     | 14.6 | 1.47  | 53.3   | 1.52  | 0.8                | -3.3    |
| 1825    | 53.7     | 14.6 | 1.48  | 53.3   | 1.52  | 0.8                | -2.6    |
| 1850    | 53.6     | 14.5 | 1.50  | 53.3   | 1.52  | 0.6                | -1.3    |
| 1900    | 53.5     | 14.5 | 1.53  | 53.3   | 1.52  | 0.4                | 0.7     |
| 1950    | 53.5     | 14.5 | 1.57  | 53.3   | 1.52  | 0.4                | 3.3     |
| 2000    | 53.4     | 14.4 | 1.60  | 53.3   | 1.52  | 0.2                | 5.3     |
| 2050    | 53.4     | 14.4 | 1.64  | 53.2   | 1.57  | 0.3                | 4.5     |
| 2100    | 53.3     | 14.4 | 1.68  | 53.2   | 1.62  | 0.2                | 3.7     |
| 2150    | 53.3     | 14.4 | 1.72  | 53.1   | 1.66  | 0.4                | 3.6     |
| 2200    | 53.2     | 14.4 | 1.76  | 53.0   | 1.71  | 0.3                | 2.9     |
| 2250    | 53.1     | 14.4 | 1.81  | 53.0   | 1.76  | 0.2                | 2.8     |
| 2300    | 53.1     | 14.4 | 1.85  | 52.9   | 1.81  | 0.4                | 2.2     |
| 2350    | 53.0     | 14.5 | 1.89  | 52.8   | 1.85  | 0.3                | 2.2     |
| 2400    | 52.9     | 14.5 | 1.94  | 52.8   | 1.90  | 0.2                | 2.1     |
| 2450    | 52.9     | 14.5 | 1.98  | 52.7   | 1.95  | 0.4                | 1.5     |
| 2500    | 52.8     | 14.6 | 2.03  | 52.6   | 2.02  | 0.3                | 0.5     |
| 2550    | 52.7     | 14.6 | 2.07  | 52.6   | 2.09  | 0.2                | -1.0    |
| 2600    | 52.6     | 14.7 | 2.12  | 52.5   | 2.16  | 0.2                | -1.9    |

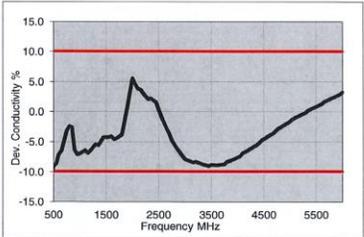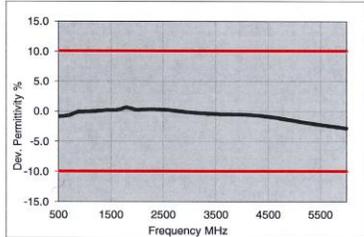

|      |      |      |      |      |      |      |      |
|------|------|------|------|------|------|------|------|
| 3500 | 51.1 | 15.5 | 3.02 | 51.3 | 3.31 | -0.4 | -8.8 |
| 3700 | 50.8 | 15.7 | 3.24 | 51.1 | 3.55 | -0.5 | -8.8 |
| 5200 | 48.1 | 18.2 | 5.27 | 49.0 | 5.30 | -1.8 | -0.6 |
| 5250 | 48.0 | 18.3 | 5.34 | 49.0 | 5.36 | -1.9 | -0.4 |
| 5300 | 47.9 | 18.4 | 5.41 | 48.9 | 5.42 | -2.0 | -0.2 |
| 5500 | 47.5 | 18.6 | 5.70 | 48.6 | 5.65 | -2.2 | 0.8  |
| 5600 | 47.3 | 18.8 | 5.84 | 48.5 | 5.77 | -2.3 | 1.3  |
| 5700 | 47.1 | 18.9 | 5.99 | 48.3 | 5.88 | -2.5 | 1.8  |
| 5800 | 47.0 | 19.0 | 6.14 | 48.2 | 6.00 | -2.6 | 2.3  |

TSL Dielectric Parameters

1

**Figure B-13-2**  
**600 – 5800 MHz Body Tissue Equivalent Matter**

|   |  |   |  |  |
|---|--|---|--|--|
| FCC ID: ZNFF100TM                         | <b>PCTEST</b><br>Proud to be part of element | <b>PART 2 RF EXPOSURE EVALUATION REPORT</b> |  | <b>Approved by:</b><br>Quality Manager |
| <b>Test Dates:</b><br>08/08/20 - 08/27/20 | <b>DUT Type:</b><br>Portable Handset         |   |  | Appendix B<br>Page 2 of 2              |

## APPENDIX C: SAR SYSTEM VALIDATION

Per FCC KDB Publication 865664 D02v01r02, SAR system validation status should be documented to confirm measurement accuracy. The SAR systems (including SAR probes, system components and software versions) used for this device were validated against its performance specifications prior to the SAR measurements. Reference dipoles were used with the required tissue- equivalent media for system validation, according to the procedures outlined in FCC KDB Publication 865664 D01v01r04 and IEEE 1526-2013. Since SAR probe calibrations are frequency dependent, each probe calibration point was validated at a frequency within the valid frequency range of the probe calibration point, using the system that normally operates with the probe for routine SAR measurements and according to the required tissue-equivalent media.

A tabulated summary of the system validation status including the validation date(s), measurement frequencies, SAR probes and tissue dielectric parameters has been included.

**Table C-1**  
**SAR System Validation Summary – 1g**

| SAR System | Freq. (MHz) | Date                      | Probe SN | Probe Cal Point |      | Cond. ( $\sigma$ ) | Perm. ( $\epsilon_r$ ) | CW VALIDATION |                 |                | MOD. VALIDATION |             |     |
|------------|-------------|---------------------------|----------|-----------------|------|--------------------|------------------------|---------------|-----------------|----------------|-----------------|-------------|-----|
|            |             |                           |          |                 |      |                    |                        | SENSITIVITY   | PROBE LINEARITY | PROBE ISOTROPY | MOD. TYPE       | DUTY FACTOR | PAR |
| M          | 1750        | <a href="#">5/19/2020</a> | 7526     | 1750            | Body | 1.507              | 51.979                 | PASS          | PASS            | PASS           | N/A             | N/A         | N/A |
| N          | 1750        | <a href="#">5/14/2020</a> | 7526     | 1750            | Body | 1.463              | 52.562                 | PASS          | PASS            | PASS           | N/A             | N/A         | N/A |
| N          | 1900        | <a href="#">5/14/2020</a> | 7526     | 1900            | Body | 1.562              | 52.331                 | PASS          | PASS            | PASS           | GMSK            | PASS        | N/A |
| M          | 1900        | <a href="#">5/19/2020</a> | 7526     | 1900            | Body | 1.585              | 53.549                 | PASS          | PASS            | PASS           | GMSK            | PASS        | N/A |
| M          | 3700        | <a href="#">5/21/2020</a> | 7526     | 3700            | Body | 3.394              | 51.953                 | PASS          | PASS            | PASS           | TDD             | PASS        | N/A |

**Table C-2**  
**SAR System Validation Summary – 10g**

| SAR System | Freq. (MHz) | Date                      | Probe SN | Probe Cal Point |      | Cond. ( $\sigma$ ) | Perm. ( $\epsilon_r$ ) | CW VALIDATION |                 |                | MOD. VALIDATION |             |     |
|------------|-------------|---------------------------|----------|-----------------|------|--------------------|------------------------|---------------|-----------------|----------------|-----------------|-------------|-----|
|            |             |                           |          |                 |      |                    |                        | SENSITIVITY   | PROBE LINEARITY | PROBE ISOTROPY | MOD. TYPE       | DUTY FACTOR | PAR |
| M          | 1900        | <a href="#">5/19/2020</a> | 7526     | 1900            | Body | 1.585              | 53.549                 | PASS          | PASS            | PASS           | GMSK            | PASS        | N/A |


NOTE: While the probes have been calibrated for both CW and modulated signals, all measurements were performed using communication systems calibrated for CW signals only. Modulations in the table above represent test configurations for which the measurement system has been validated per FCC KDB Publication 865664 D01v01r04 for scenarios when CW probe calibrations are used with other signal types. SAR systems were validated for modulated signals with a periodic duty cycle, such as GMSK, or with a high peak to average ratio (>5 dB), such as OFDM according to FCC KDB Publication 865664 D01v01r04.

|   |   |  |
|---|---|--|
| FCC ID: ZNFF100TM                         | <b>PART 2 RF EXPOSURE EVALUATION REPORT</b> | <b>Approved by:</b><br>Quality Manager |
| <b>Test Dates:</b><br>08/08/20 - 08/27/20 | <b>DUT Type:</b><br>Portable Handset        | Appendix C<br>Page 1 of 1              |

## APPENDIX E: TEST SEQUENCES

1. Test sequence is generated based on below parameters of the DUT:
  - a. Measured maximum power ( $P_{max}$ )
  - b. Measured Tx\_power\_at\_SAR\_design\_target ( $P_{limit}$ )
  - c. Reserve\_power\_margin (dB)
    - $P_{reserve}$  (dBm) = measured  $P_{limit}$  (dBm) – Reserve\_power\_margin (dB)
  - d. SAR\_time\_window (100s for FCC)
2. Test Sequence 1 Waveform:

Based on the parameters above, the Test Sequence 1 is generated with one transition between high and low Tx powers. Here, high power =  $P_{max}$ ; low power =  $P_{max}/2$ , and the transition occurs after 80 seconds at high power  $P_{max}$ . As long as the power enforcement is taking into effective during one 100s/60s time window, the validation test with this defined test sequence 1 is valid, otherwise, select other radio configuration (band/DSI within the same technology group) having lower  $P_{limit}$  for this test. The Test sequence 1 waveform is shown below:

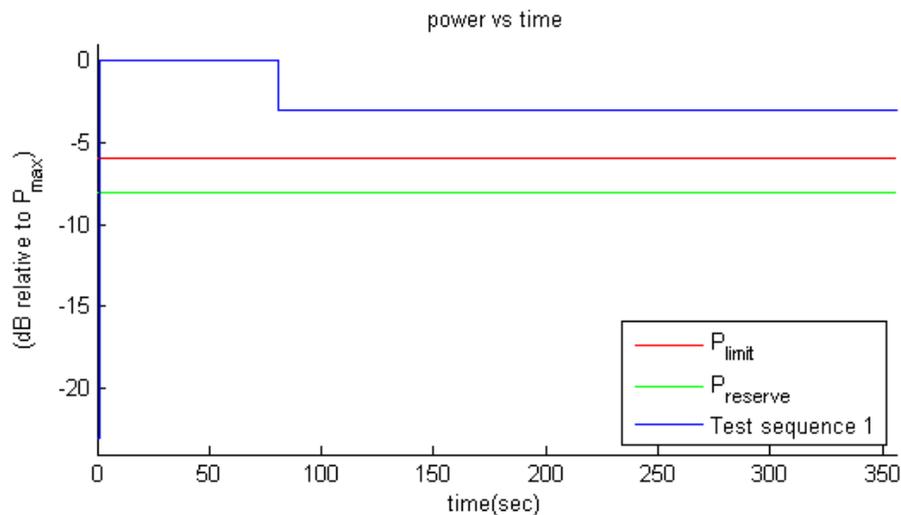

**Figure E-1**  
Test sequence 1 waveform

|   |   |  |
|---|---|--|
| FCC ID: ZNFF100TM                         |  <b>PART 2 RF EXPOSURE EVALUATION REPORT</b>  | <b>Approved by:</b><br>Quality Manager |
| <b>Test Dates:</b><br>08/08/20 - 08/27/20 | <b>DUT Type:</b><br>Portable Handset  | Appendix E<br>Page 1 of 3              |

3. Test Sequence 2 Waveform:


Based on the parameters described above, the Test Sequence 2 is generated as described in Table 8-1, which contains two 170 second-long sequences (yellow and green highlighted rows) that are mirrored around the center row of 20s, resulting in a total duration of 360 seconds:

**Table E-1  
Test Sequence 2**

| Time duration (seconds) | dB relative to $P_{limit}$ or $P_{reserve}$                                 |
|-------------------------|---|
| 15                      | $P_{reserve} - 2$   |
| 20                      | $P_{limit}$   |
| 20                      | $(P_{limit} + P_{max})/2$ averaged in mW and rounded to nearest 0.1 dB step |
| 10                      | $P_{reserve} - 6$   |
| 20                      | $P_{max}$   |
| 15                      | $P_{limit}$   |
| 15                      | $P_{reserve} - 5$   |
| 20                      | $P_{max}$   |
| 10                      | $P_{reserve} - 3$   |
| 15                      | $P_{limit}$   |
| 10                      | $P_{reserve} - 4$   |
| 20                      | $(P_{limit} + P_{max})/2$ averaged in mW and rounded to nearest 0.1 dB step |
| 10                      | $P_{reserve} - 4$   |
| 15                      | $P_{limit}$   |
| 10                      | $P_{reserve} - 3$   |
| 20                      | $P_{max}$   |
| 15                      | $P_{reserve} - 5$   |
| 15                      | $P_{limit}$   |
| 20                      | $P_{max}$   |
| 10                      | $P_{reserve} - 6$   |
| 20                      | $(P_{limit} + P_{max})/2$ averaged in mW and rounded to nearest 0.1 dB step |
| 20                      | $P_{limit}$   |
| 15                      | $P_{reserve} - 2$   |

|   |   |                                      |   |  |
|---|---|--------------------------------------|---|--|
| FCC ID: ZNFF100TM                         |  <b>PCTEST</b><br><small>Proud to be part of element</small> | PART 2 RF EXPOSURE EVALUATION REPORT |  | <b>Approved by:</b><br>Quality Manager |
| <b>Test Dates:</b><br>08/08/20 - 08/27/20 | <b>DUT Type:</b><br>Portable Handset  |                                      |   | Appendix E<br>Page 2 of 3              |

The Test Sequence 2 waveform is shown in Figure E-2.

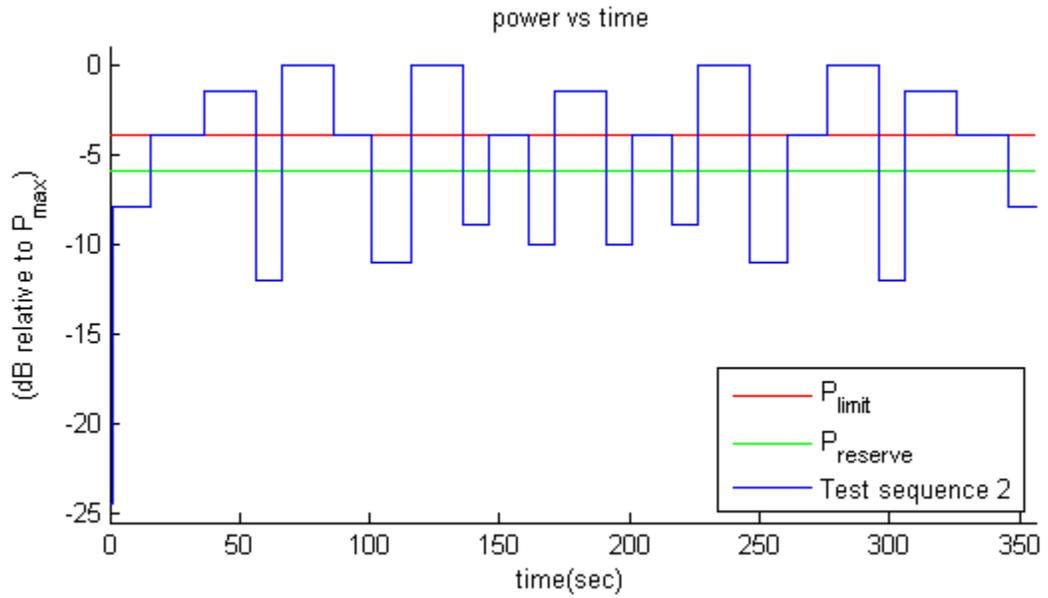

**Figure E-2**  
Test sequence 2 waveform

|   |   |   |   |  |
|---|---|---|---|--|
| FCC ID: ZNFF100TM                         |  <b>PCTEST</b><br><small>Proud to be part of element</small> | <b>PART 2 RF EXPOSURE EVALUATION REPORT</b> |  | <b>Approved by:</b><br>Quality Manager |
| <b>Test Dates:</b><br>08/08/20 - 08/27/20 | <b>DUT Type:</b><br>Portable Handset  | Appendix E<br>Page 3 of 3                   |   |  |

## APPENDIX F: TEST PROCEDURES FOR SUB6 NR + NR RADIO

Appendix F provides the test procedures for validating Qualcomm Smart Transmit feature for LTE + Sub6 NR non-standalone (NSA) mode transmission scenario, where sub-6GHz LTE link acts as an anchor.

### F.1 Time-varying Tx power test for sub6 NR in NSA mode

Follows Section 4.2.1 to select test configurations for time-varying test. This test is performed with two pre-defined test sequences (described in Section 4.1) applied to Sub6 NR (with LTE on all-down bits or low power for the entire test after establishing the LTE+Sub6 NR call with the callbox). Follow the test procedures described in Section 4.3.1 to demonstrate the effectiveness of power limiting enforcement and that the time averaged Tx power of Sub6 NR when converted into 1gSAR values does not exceed the regulatory limit at all times (see Eq. (1a) and (1b)). Sub6 NR response to test sequence1 and test sequence2 will be similar to other technologies (say, LTE), and are shown in Sections 9.1.6 and 9.1.7.

### F.2 Switch in SAR exposure between LTE vs. Sub6 NR during transmission

This test is to demonstrate that Smart Transmit feature accurately accounts for switching in exposures among SAR for LTE radio only, SAR from both LTE radio and sub6 NR, and SAR from sub6 NR only scenarios, and ensures total time-averaged RF exposure compliance with FCC limit.

#### Test procedure:

4. Measure conducted Tx power corresponding to  $P_{limit}$  for LTE and sub6 NR in selected band. Test condition to measure conducted  $P_{limit}$  is:
  - Establish device in call with the callbox for LTE in desired band. Measure conducted Tx power corresponding to LTE  $P_{limit}$  with Smart Transmit enabled and *Reserve\_power\_margin* set to 0 dB, callbox set to request maximum power.
  - Repeat above step to measure conducted Tx power corresponding to Sub6 NR  $P_{limit}$ . If testing LTE+Sub6 NR in non-standalone mode, then establish LTE+Sub6 NR call with callbox and request all down bits for radio1 LTE. In this scenario, with callbox requesting maximum power from Sub6 NR, measured conducted Tx power corresponds to radio2  $P_{limit}$  (as radio1 LTE is at all-down bits)
5. Set *Reserve\_power\_margin* to actual (intended) value with EUT setup for LTE + Sub6 NR call. First, establish LTE connection in all-up bits with the callbox, and then Sub6 NR connection is added with callbox requesting UE to transmit at maximum power in Sub6 NR. As soon as the Sub6 NR connection is established, request all-down bits on LTE link (otherwise, Sub6 NR will not have sufficient RF exposure margin to sustain the call with LTE in all-up bits). Continue LTE (all-down bits) + Sub6 NR transmission for more than one time-window duration to test predominantly Sub6 NR SAR exposure scenario (as SAR exposure is negligible from all-down bits in LTE). After at least one time-window, request LTE to go all-up bits to test LTE SAR and Sub6 NR SAR exposure scenario. After at least one more time-window, drop (or request all-down bits) Sub6 NR transmission to test predominantly LTE SAR exposure scenario. Continue the test for at least one more time-window. Record the conducted Tx powers for both LTE and Sub6 NR for the entire duration of this test.

|   |   |  |
|---|---|--|
| FCC ID: ZNFF100TM                         |  <b>PART 2 RF EXPOSURE EVALUATION REPORT</b>  | <b>Approved by:</b><br>Quality Manager |
| <b>Test Dates:</b><br>08/08/20 - 08/27/20 | <b>DUT Type:</b><br>Portable Handset  | Appendix F<br>Page 1 of 2              |

6. Once the measurement is done, extract instantaneous Tx power versus time for both LTE and Sub6 NR links. Similar to technology/band switch test in Section 4.3.3, convert the conducted Tx power for both these radios into 1gSAR value (see Eq. (6a) and (6b)) using corresponding technology/band  $P_{limit}$  measured in Step 1, and then perform 100s running average to determine time-averaged 1gSAR versus time as illustrated in Figure 4-1. Note that here it is assumed both radios have Tx frequencies < 3GHz, otherwise, 60s running average should be performed for radios having Tx frequency between 3GHz and 6GHz.
7. Make one plot containing: (a) instantaneous Tx power versus time measured in Step 2.
8. Make another plot containing: (a) instantaneous 1gSAR versus time determined in Step 3, (b) computed time-averaged 1gSAR versus time determined in Step 3, and (c) corresponding regulatory  $1gSAR_{limit}$  of 1.6W/kg.

The validation criteria is, at all times, the time-averaged 1gSAR versus time shall not exceed the regulatory  $1gSAR_{limit}$  of 1.6W/kg.

|   |   |   |   |  |
|---|---|---|---|--|
| FCC ID: ZNFF100TM                         |  <b>PCTEST</b><br><small>Proud to be part of element</small> | <b>PART 2 RF EXPOSURE EVALUATION REPORT</b> |  | <b>Approved by:</b><br>Quality Manager |
| <b>Test Dates:</b><br>08/08/20 - 08/27/20 | <b>DUT Type:</b><br>Portable Handset  |   |   | Appendix F<br>Page 2 of 2              |

## APPENDIX G: CALIBRATION CERTIFICATES



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No.: **D1750V2-1150\_Oct18**

**CALIBRATION CERTIFICATE**

Object **D1750V2 - SN:1150**

Calibration procedure(s) **QA CAL-05.v10  
Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **October 22, 2018**

*BNV*  
*10/30/2018*  
*BNV*  
*10-20-2019*

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)      | Scheduled Calibration |
|-----------------------------|--------------------|---------------------------------|-----------------------|
| Power meter NRP             | SN: 104778         | 04-Apr-18 (No. 217-02672/02673) | Apr-19                |
| Power sensor NRP-Z91        | SN: 103244         | 04-Apr-18 (No. 217-02672)       | Apr-19                |
| Power sensor NRP-Z91        | SN: 103245         | 04-Apr-18 (No. 217-02673)       | Apr-19                |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 04-Apr-18 (No. 217-02682)       | Apr-19                |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 04-Apr-18 (No. 217-02683)       | Apr-19                |
| Reference Probe EX3DV4      | SN: 7349           | 30-Dec-17 (No. EX3-7349_Dec17)  | Dec-18                |
| DAE4                        | SN: 601            | 04-Oct-18 (No. DAE4-601_Oct18)  | Oct-19                |

| Secondary Standards             | ID #           | Check Date (in house)             | Scheduled Check        |
|---------------------------------|----------------|-----------------------------------|------------------------|
| Power meter EPM-442A            | SN: GB37480704 | 07-Oct-15 (in house check Oct-18) | In house check: Oct-20 |
| Power sensor HP 8481A           | SN: US37292783 | 07-Oct-15 (in house check Oct-18) | In house check: Oct-20 |
| Power sensor HP 8481A           | SN: MY41092317 | 07-Oct-15 (in house check Oct-18) | In house check: Oct-20 |
| RF generator R&S SMT-06         | SN: 100972     | 15-Jun-15 (in house check Oct-18) | In house check: Oct-20 |
| Network Analyzer Agilent E8358A | SN: US41080477 | 31-Mar-14 (in house check Oct-18) | In house check: Oct-19 |

Calibrated by: **Name: Michael Weber, Function: Laboratory Technician, Signature: M. Weber**

Approved by: **Name: Katja Pokovic, Function: Technical Manager, Signature: K. Pokovic**

Issued: October 22, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

### Glossary:

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                                     |                        |             |
|-------------------------------------|------------------------|-------------|
| <b>DASY Version</b>                 | DASY5                  | V52.10.2    |
| <b>Extrapolation</b>                | Advanced Extrapolation |             |
| <b>Phantom</b>                      | Modular Flat Phantom   |             |
| <b>Distance Dipole Center - TSL</b> | 10 mm                  | with Spacer |
| <b>Zoom Scan Resolution</b>         | dx, dy, dz = 5 mm      |             |
| <b>Frequency</b>                    | 1750 MHz $\pm$ 1 MHz   |             |

## Head TSL parameters

The following parameters and calculations were applied.

|  | Temperature         | Permittivity   | Conductivity         |
|--|---------------------|----------------|----------------------|
| <b>Nominal Head TSL parameters</b>             | 22.0 °C             | 40.1           | 1.37 mho/m           |
| <b>Measured Head TSL parameters</b>            | (22.0 $\pm$ 0.2) °C | 38.8 $\pm$ 6 % | 1.33 mho/m $\pm$ 6 % |
| <b>Head TSL temperature change during test</b> | < 0.5 °C            | ----           | ----                 |

## SAR result with Head TSL

| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b> | Condition          |  |
|---|--------------------|--|
| SAR measured  | 250 mW input power | 9.02 W/kg                                      |
| SAR for nominal Head TSL parameters                         | normalized to 1W   | <b>36.5 W/kg <math>\pm</math> 17.0 % (k=2)</b> |

| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b> | condition          |  |
|---|--------------------|--|
| SAR measured  | 250 mW input power | 4.76 W/kg                                      |
| SAR for nominal Head TSL parameters                           | normalized to 1W   | <b>19.2 W/kg <math>\pm</math> 16.5 % (k=2)</b> |

## Body TSL parameters

The following parameters and calculations were applied.

|  | Temperature         | Permittivity   | Conductivity         |
|--|---------------------|----------------|----------------------|
| <b>Nominal Body TSL parameters</b>             | 22.0 °C             | 53.4           | 1.49 mho/m           |
| <b>Measured Body TSL parameters</b>            | (22.0 $\pm$ 0.2) °C | 53.5 $\pm$ 6 % | 1.46 mho/m $\pm$ 6 % |
| <b>Body TSL temperature change during test</b> | < 0.5 °C            | ----           | ----                 |

## SAR result with Body TSL

| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b> | Condition          |  |
|---|--------------------|--|
| SAR measured  | 250 mW input power | 9.04 W/kg                                      |
| SAR for nominal Body TSL parameters                         | normalized to 1W   | <b>36.6 W/kg <math>\pm</math> 17.0 % (k=2)</b> |

| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b> | condition          |  |
|---|--------------------|--|
| SAR measured  | 250 mW input power | 4.82 W/kg                                      |
| SAR for nominal Body TSL parameters                           | normalized to 1W   | <b>19.4 W/kg <math>\pm</math> 16.5 % (k=2)</b> |

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 50.9 $\Omega$ - 0.4 j $\Omega$ |
| Return Loss                          | - 40.1 dB                      |

### Antenna Parameters with Body TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 46.6 $\Omega$ - 0.1 j $\Omega$ |
| Return Loss                          | - 29.2 dB                      |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.217 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |                |
|-----------------|----------------|
| Manufactured by | SPEAG          |
| Manufactured on | April 10, 2015 |

## DASY5 Validation Report for Head TSL

Date: 22.10.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN:1150**

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.33$  S/m;  $\epsilon_r = 38.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.5, 8.5, 8.5) @ 1750 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.10.2018
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

### Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 108.1 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 16.7 W/kg


**SAR(1 g) = 9.02 W/kg; SAR(10 g) = 4.76 W/kg**

Maximum value of SAR (measured) = 14.0 W/kg

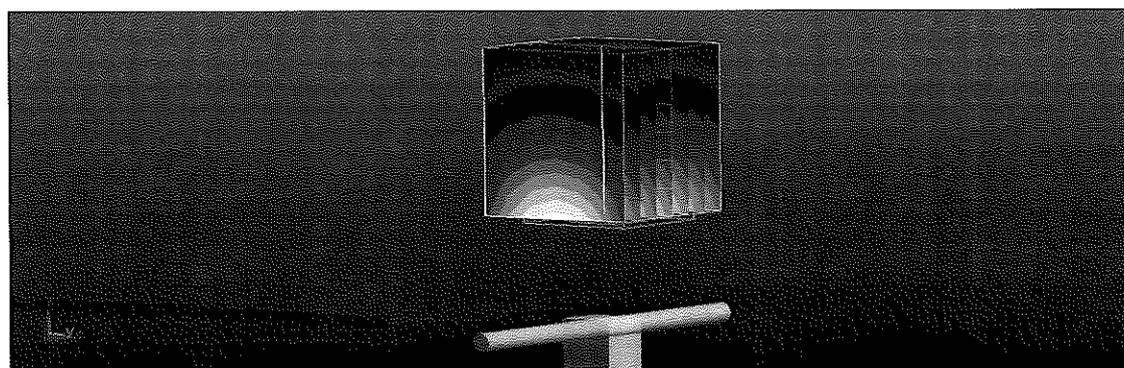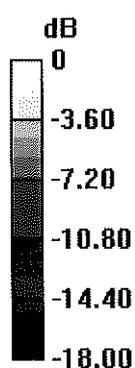

0 dB = 14.0 W/kg = 11.46 dBW/kg

# Impedance Measurement Plot for Head TSL

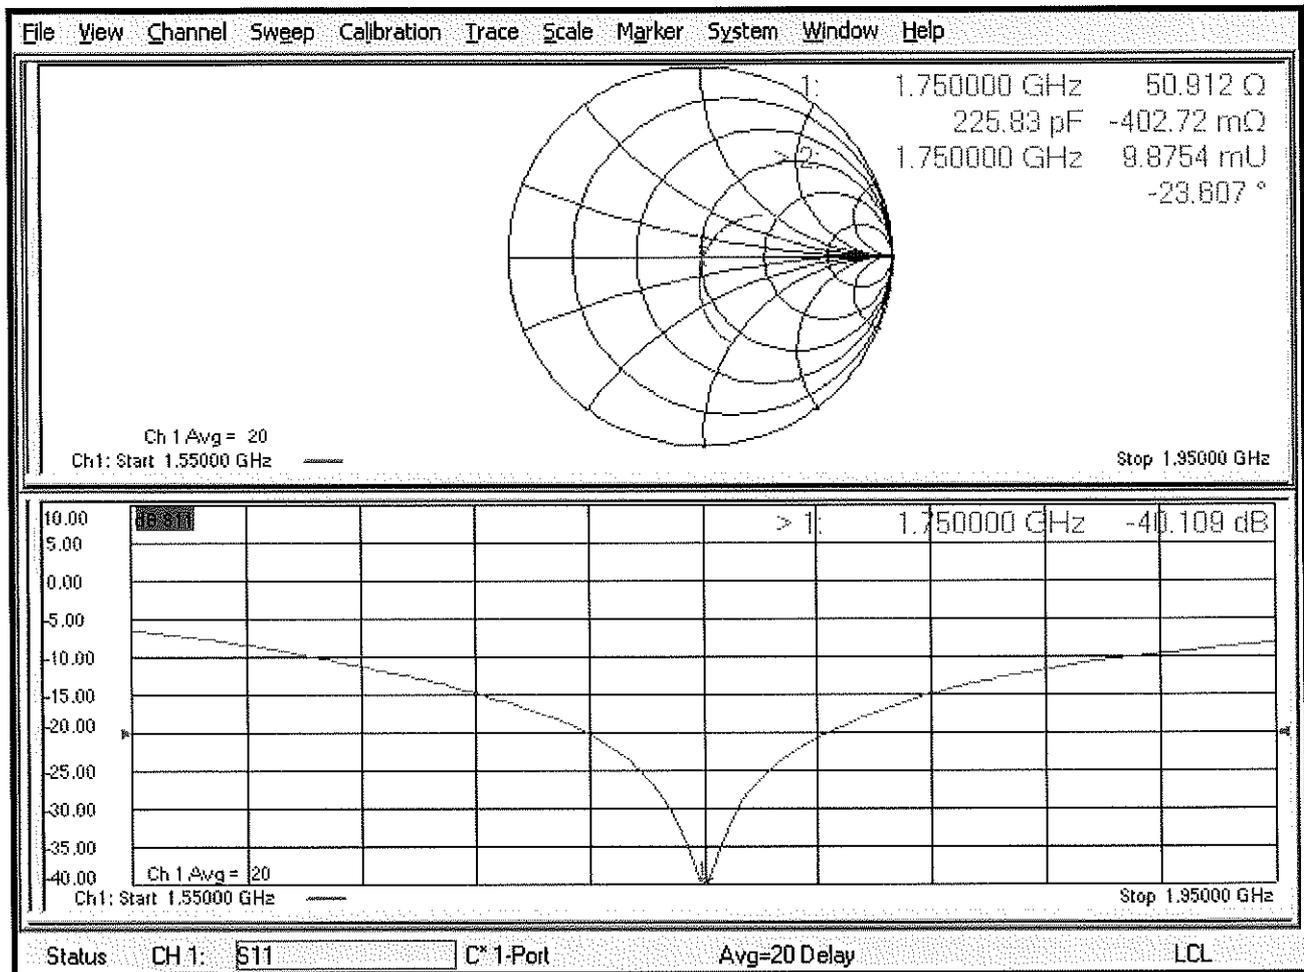

## DASY5 Validation Report for Body TSL

Date: 22.10.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN:1150**

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.46$  S/m;  $\epsilon_r = 53.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.35, 8.35, 8.35) @ 1750 MHz; Calibrated: 30.12.2017
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.10.2018
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

### Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 102.1 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 16.0 W/kg


**SAR(1 g) = 9.04 W/kg; SAR(10 g) = 4.82 W/kg**

Maximum value of SAR (measured) = 13.6 W/kg

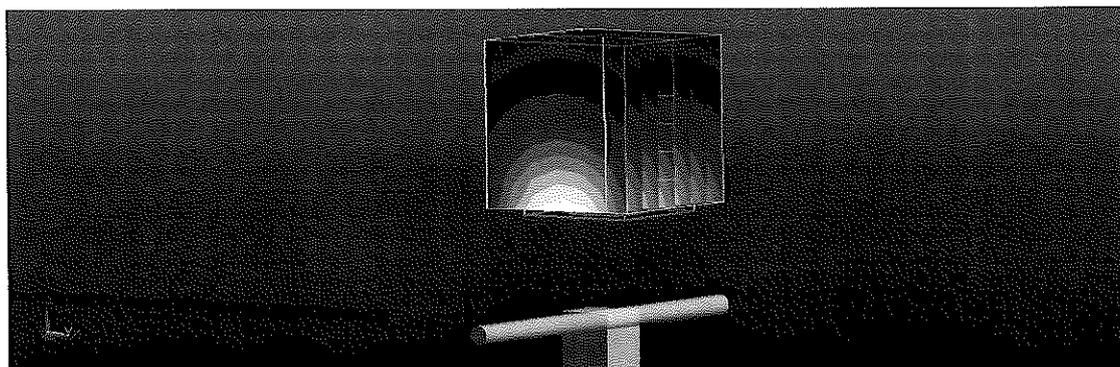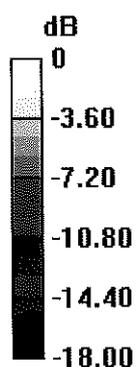

0 dB = 13.6 W/kg = 11.34 dBW/kg

# Impedance Measurement Plot for Body TSL

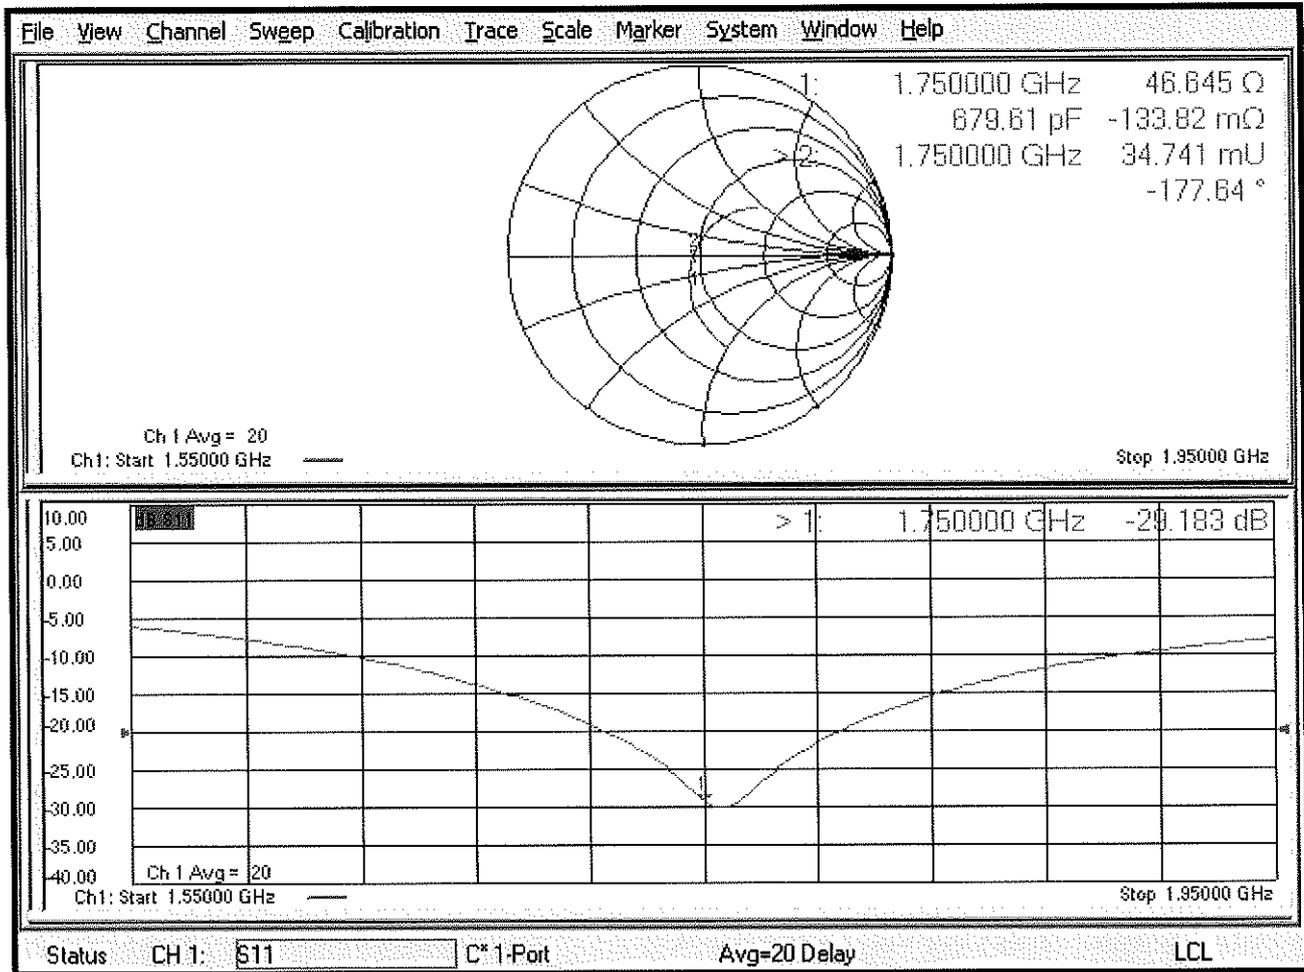

# Certification of Calibration

Object: D1750V2 – SN:1150

Calibration procedure(s): Procedure for Calibration Extension for SAR Dipoles.

Extended Calibration date: October 18, 2019

Description: SAR Validation Dipole at 1750 MHz.

## Calibration Equipment used:

| Manufacturer          | Model         | Description   | Cal Date   | Cal Interval | Cal Due    | Serial Number |
|-----------------------|---------------|---|------------|--------------|------------|---------------|
| Control Company       | 4040          | Therm./Clock/Humidity Monitor                           | 6/29/2019  | Biennial     | 6/29/2021  | 192291470     |
| Control Company       | 4352          | Ultra Long Stem Thermometer                             | 8/2/2018   | Biennial     | 8/2/2020   | 181334684     |
| Amplifier Research    | 15S1G6        | Amplifier   | CBT        | N/A          | CBT        | 433971        |
| Narda                 | 4772-3        | Attenuator (3dB)  | CBT        | N/A          | CBT        | 9406          |
| Keysight Technologies | 85033E        | Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm) | 7/2/2019   | Annual       | 7/2/2020   | MY53401181    |
| Rohde & Schwarz       | ZNLE6         | Vector Network Analyzer                                 | 10/11/2019 | Annual       | 10/11/2020 | 101307        |
| Mini-Circuits         | BW-N20W5+     | DC to 18 GHz Precision Fixed 20 dB Attenuator           | CBT        | N/A          | CBT        | N/A           |
| SPEAG                 | DAK5-3.5      | Portable Dielectric Assessment Kit                      | 8/13/2019  | Annual       | 8/13/2020  | 1041          |
| Anritsu               | MA2411B       | Pulse Power Sensor                                      | 8/14/2019  | Annual       | 8/14/2020  | 1315051       |
| Anritsu               | MA2411B       | Pulse Power Sensor                                      | 8/8/2019   | Annual       | 8/8/2020   | 1339008       |
| Anritsu               | ML2495A       | Power Meter   | 11/20/2018 | Annual       | 11/20/2019 | 1039008       |
| Agilent               | N5182A        | MXG Vector Signal Generator                             | 8/19/2019  | Annual       | 8/19/2020  | MY47420837    |
| Seekonk               | NC-100        | Torque Wrench   | 5/9/2018   | Biennial     | 5/9/2020   | 22217         |
| Mini-Circuits         | NLP-2950+     | Low Pass Filter DC to 2700 MHz                          | CBT        | N/A          | CBT        | N/A           |
| MiniCircuits          | ZHDC-16-63-S+ | Bidirectional Coupler                                   | CBT        | N/A          | CBT        | N/A           |
| MiniCircuits          | VLF-6000+     | Low Pass Filter   | CBT        | N/A          | CBT        | N/A           |
| SPEAG                 | EX3DV4        | SAR Probe   | 8/16/2019  | Annual       | 8/16/2020  | 7308          |
| SPEAG                 | EX3DV4        | SAR Probe   | 4/24/2019  | Annual       | 4/24/2020  | 7357          |
| SPEAG                 | DAE4          | Dasy Data Acquisition Electronics                       | 4/18/2019  | Annual       | 4/18/2020  | 1407          |
| SPEAG                 | DAE4          | Dasy Data Acquisition Electronics                       | 8/14/2019  | Annual       | 8/14/2020  | 1450          |

Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path.

Measurement Uncertainty =  $\pm 23\%$  (k=2)

|                | Name             | Function                 | Signature                |
|----------------|------------------|--------------------------|--------------------------|
| Calibrated By: | Brodie Halfoster | Team Lead Engineer       | <i>BRODIE HALBFOSTER</i> |
| Approved By:   | Kaitlin O'Keefe  | Senior Technical Manager | <i>KOK</i>               |

# DIPOLE CALIBRATION EXTENSION


Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:

1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.

The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:


| Calibration Date | Extension Date | Certificate Electrical Delay (ms) | Certificate SAR Target Head (1g) W/kg @ 20.0 dBm | Measured Head SAR (1g) W/kg @ 20.0 dBm | Deviation 1g (%) | Certificate SAR Target Head (10g) W/kg @ 20.0 dBm | Measured Head SAR (10g) W/kg @ 20.0 dBm | Deviation 10g (%) | Certificate Impedance Head (Ohm) Real | Measured Impedance Head (Ohm) Real | Difference (Ohm) Real | Certificate Impedance Head (Ohm) Imaginary | Measured Impedance Head (Ohm) Imaginary | Difference (Ohm) Imaginary | Certificate Return Loss Head (dB) | Measured Return Loss Head (dB) | Deviation (%) | PASS/FAIL |
|------------------|----------------|-----------------------------------|--|--|------------------|---|---|-------------------|---------------------------------------|------------------------------------|-----------------------|--|---|----------------------------|-----------------------------------|--------------------------------|---------------|-----------|
| 10/22/2018       | 10/18/2019     | 1.217                             | 3.65   | 3.8                                    | 4.11%            | 1.92  | 2                                       | 4.17%             | 50.9                                  | 49.3                               | 1.6                   | 0.4  | -0.7                                    | 1.1                        | -40.1                             | -40.2                          | -0.20%        | PASS      |
| Calibration Date | Extension Date | Certificate Electrical Delay (ms) | Certificate SAR Target Body (1g) W/kg @ 20.0 dBm | Measured Body SAR (1g) W/kg @ 20.0 dBm | Deviation 1g (%) | Certificate SAR Target Body (10g) W/kg @ 20.0 dBm | Measured Body SAR (10g) W/kg @ 20.0 dBm | Deviation 10g (%) | Certificate Impedance Body (Ohm) Real | Measured Impedance Body (Ohm) Real | Difference (Ohm) Real | Certificate Impedance Body (Ohm) Imaginary | Measured Impedance Body (Ohm) Imaginary | Difference (Ohm) Imaginary | Certificate Return Loss Body (dB) | Measured Return Loss Body (dB) | Deviation (%) | PASS/FAIL |
| 10/22/2018       | 10/18/2019     | 1.217                             | 3.66   | 3.82                                   | 4.37%            | 1.94  | 2.02                                    | 4.12%             | 46.6                                  | 44.7                               | 1.9                   | -0.1                                       | -0.8                                    | 0.7                        | -29.2                             | -25                            | 14.40%        | PASS      |

# Impedance & Return-Loss Measurement Plot for Head TSL

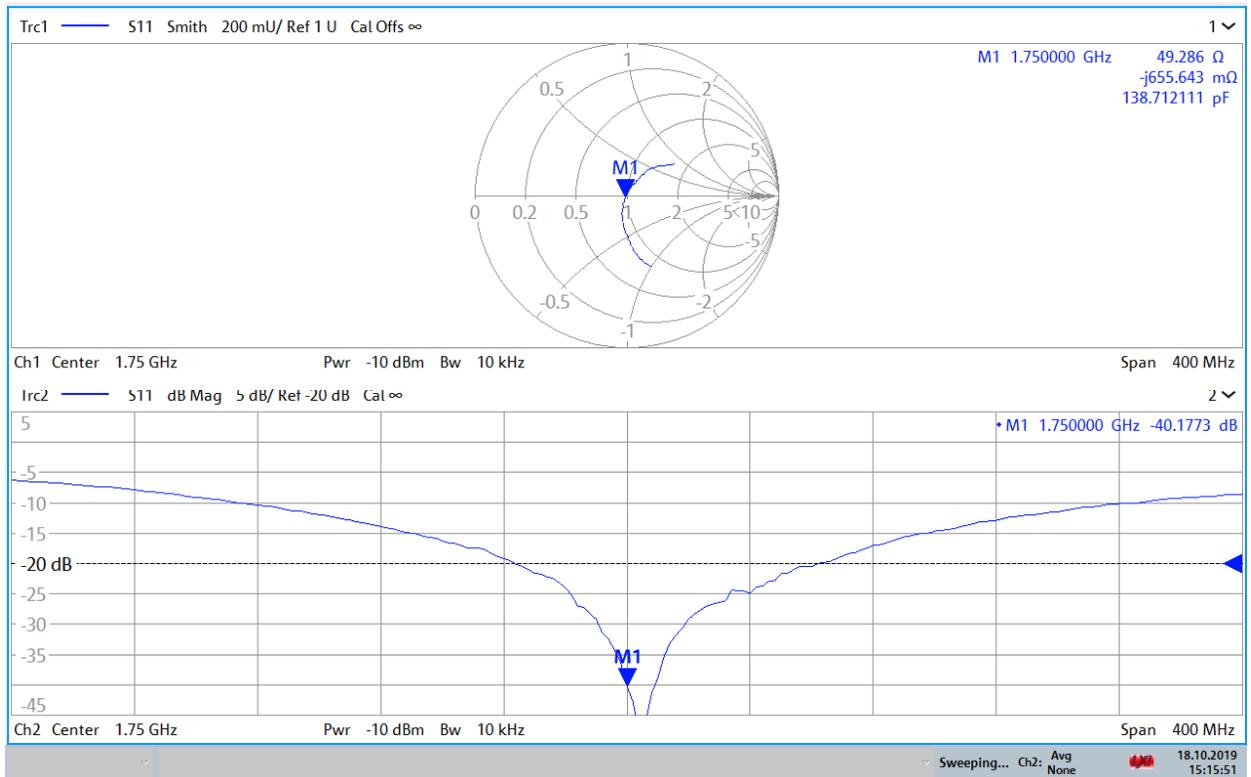

15:15:52 18.10.2019

# Impedance & Return-Loss Measurement Plot for Body TSL

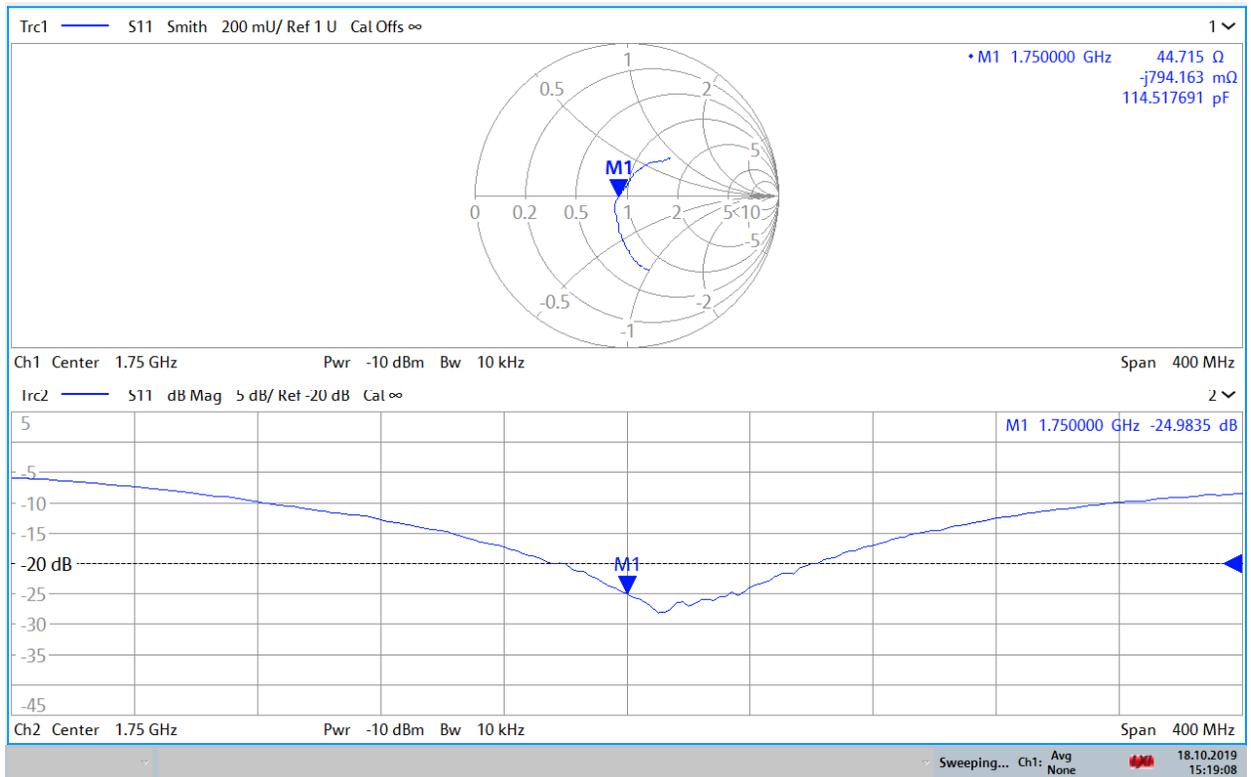

15:19:09 18.10.2019



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D1900V2-5d148 Feb19**

**CALIBRATION CERTIFICATE**

Object **D1900V2 - SN:5d148**

Calibration procedure(s) **QA CAL-05.v11  
Calibration Procedure for SAR Validation Sources between 0.7-3 GHz**

Calibration date: **February 21, 2019**

*BN ✓  
03-01-19  
BN ✓  
02-26-2020*

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)      | Scheduled Calibration |
|-----------------------------|--------------------|---------------------------------|-----------------------|
| Power meter NRP             | SN: 104778         | 04-Apr-18 (No. 217-02672/02673) | Apr-19                |
| Power sensor NRP-Z91        | SN: 103244         | 04-Apr-18 (No. 217-02672)       | Apr-19                |
| Power sensor NRP-Z91        | SN: 103245         | 04-Apr-18 (No. 217-02673)       | Apr-19                |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 04-Apr-18 (No. 217-02682)       | Apr-19                |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 04-Apr-18 (No. 217-02683)       | Apr-19                |
| Reference Probe EX3DV4      | SN: 7349           | 31-Dec-18 (No. EX3-7349_Dec18)  | Dec-19                |
| DAE4                        | SN: 601            | 04-Oct-18 (No. DAE4-601_Oct18)  | Oct-19                |

| Secondary Standards             | ID #           | Check Date (in house)             | Scheduled Check        |
|---------------------------------|----------------|-----------------------------------|------------------------|
| Power meter E4419B              | SN: GB39512475 | 07-Oct-15 (in house check Feb-19) | In house check: Oct-20 |
| Power sensor HP 8481A           | SN: US37292783 | 07-Oct-15 (in house check Oct-18) | In house check: Oct-20 |
| Power sensor HP 8481A           | SN: MY41092317 | 07-Oct-15 (in house check Oct-18) | In house check: Oct-20 |
| RF generator R&S SMT-06         | SN: 100972     | 15-Jun-15 (in house check Oct-18) | In house check: Oct-20 |
| Network Analyzer Agilent E8358A | SN: US41080477 | 31-Mar-14 (in house check Oct-18) | In house check: Oct-19 |

Calibrated by: **Manu Seltz** (Name) / **Laboratory Technician** (Function) / *[Signature]* (Signature)

Approved by: **Kalja Pokovic** (Name) / **Technical Manager** (Function) / *[Signature]* (Signature)

Issued: February 21, 2019

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

**Glossary:**

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                              |                        |             |
|------------------------------|------------------------|-------------|
| DASY Version                 | DASY5                  | V52.10.2    |
| Extrapolation                | Advanced Extrapolation |             |
| Phantom                      | Modular Flat Phantom   |             |
| Distance Dipole Center - TSL | 10 mm                  | with Spacer |
| Zoom Scan Resolution         | dx, dy, dz = 5 mm      |             |
| Frequency                    | 1900 MHz $\pm$ 1 MHz   |             |

## Head TSL parameters

The following parameters and calculations were applied.

|   | Temperature         | Permittivity   | Conductivity         |
|---|---------------------|----------------|----------------------|
| Nominal Head TSL parameters             | 22.0 °C             | 40.0           | 1.40 mho/m           |
| Measured Head TSL parameters            | (22.0 $\pm$ 0.2) °C | 40.9 $\pm$ 6 % | 1.38 mho/m $\pm$ 6 % |
| Head TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Head TSL

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |  |
|---|--------------------|--|
| SAR measured  | 250 mW input power | 9.65 W/kg                                      |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | <b>39.1 W/kg <math>\pm</math> 17.0 % (k=2)</b> |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |  |
|---|--------------------|--|
| SAR measured  | 250 mW input power | 5.05 W/kg                                      |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | <b>20.4 W/kg <math>\pm</math> 16.5 % (k=2)</b> |

## Body TSL parameters

The following parameters and calculations were applied.

|   | Temperature         | Permittivity   | Conductivity         |
|---|---------------------|----------------|----------------------|
| Nominal Body TSL parameters             | 22.0 °C             | 53.3           | 1.52 mho/m           |
| Measured Body TSL parameters            | (22.0 $\pm$ 0.2) °C | 53.6 $\pm$ 6 % | 1.47 mho/m $\pm$ 6 % |
| Body TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Body TSL

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |  |
|---|--------------------|--|
| SAR measured  | 250 mW input power | 9.56 W/kg                                      |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | <b>39.1 W/kg <math>\pm</math> 17.0 % (k=2)</b> |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |  |
|---|--------------------|--|
| SAR measured  | 250 mW input power | 5.05 W/kg                                      |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | <b>20.5 W/kg <math>\pm</math> 16.5 % (k=2)</b> |

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 51.8 $\Omega$ + 6.8 j $\Omega$ |
| Return Loss                          | - 23.2 dB                      |

### Antenna Parameters with Body TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 48.4 $\Omega$ + 7.8 j $\Omega$ |
| Return Loss                          | - 21.9 dB                      |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.170 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |       |
|-----------------|-------|
| Manufactured by | SPEAG |
|-----------------|-------|

## DASY5 Validation Report for Head TSL

Date: 21.02.2019

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d148**

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.38$  S/m;  $\epsilon_r = 40.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.26, 8.26, 8.26) @ 1900 MHz; Calibrated: 31.12.2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.10.2018
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

### Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 109.4 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 17.8 W/kg


**SAR(1 g) = 9.65 W/kg; SAR(10 g) = 5.05 W/kg**

Maximum value of SAR (measured) = 15.0 W/kg

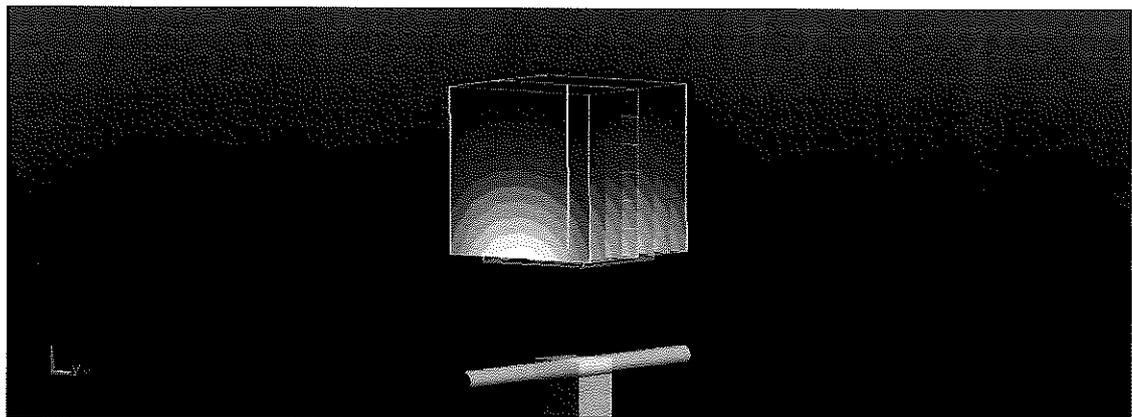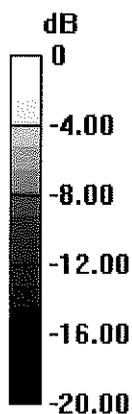

0 dB = 15.0 W/kg = 11.76 dBW/kg

# Impedance Measurement Plot for Head TSL

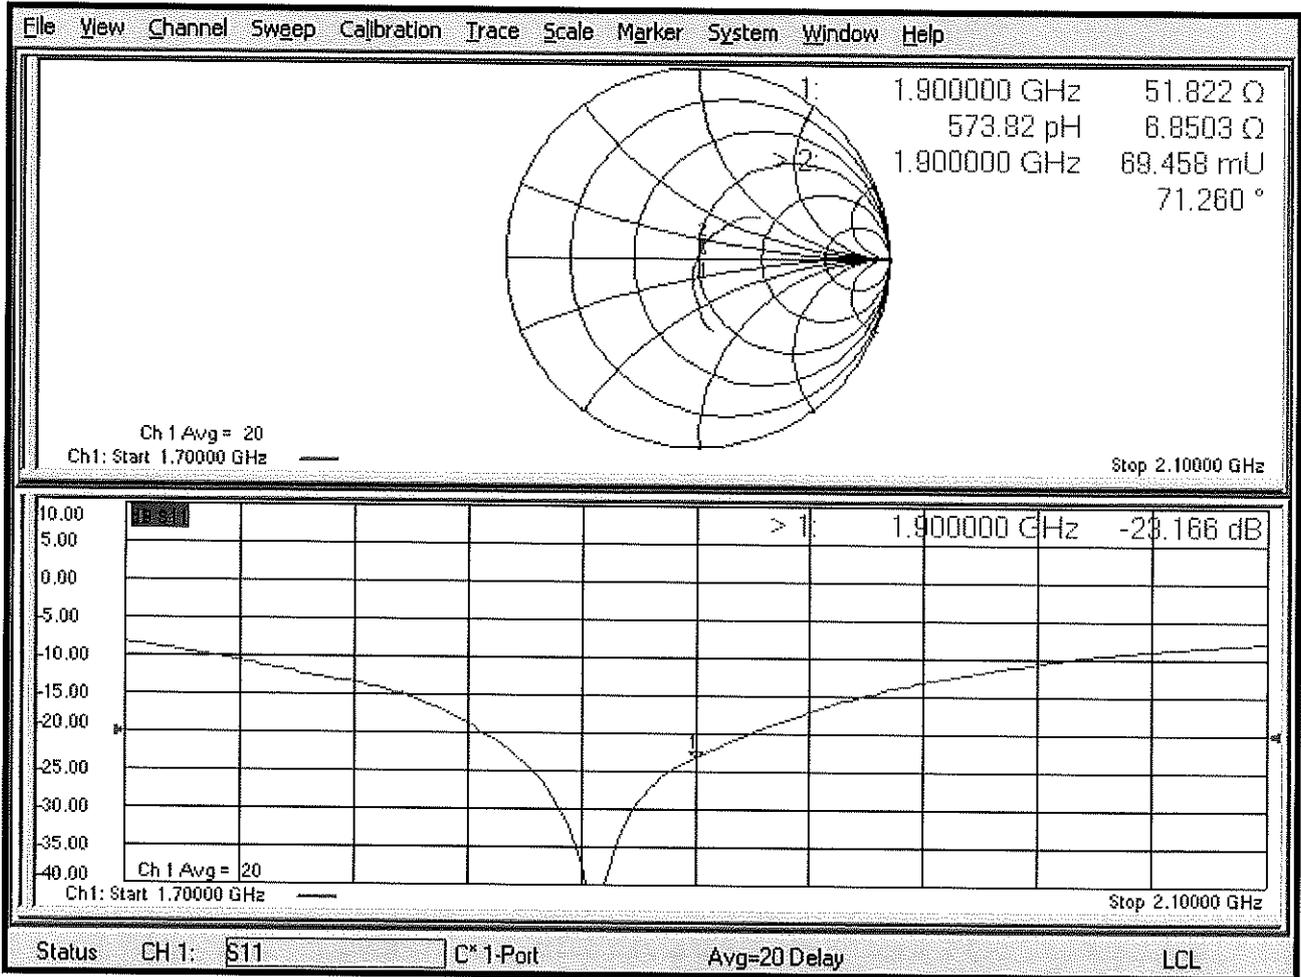

## DASY5 Validation Report for Body TSL

Date: 21.02.2019

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d148**

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.47$  S/m;  $\epsilon_r = 53.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.23, 8.23, 8.23) @ 1900 MHz; Calibrated: 31.12.2018
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 04.10.2018
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

### Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 103.7 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 17.0 W/kg


**SAR(1 g) = 9.56 W/kg; SAR(10 g) = 5.05 W/kg**

Maximum value of SAR (measured) = 14.4 W/kg

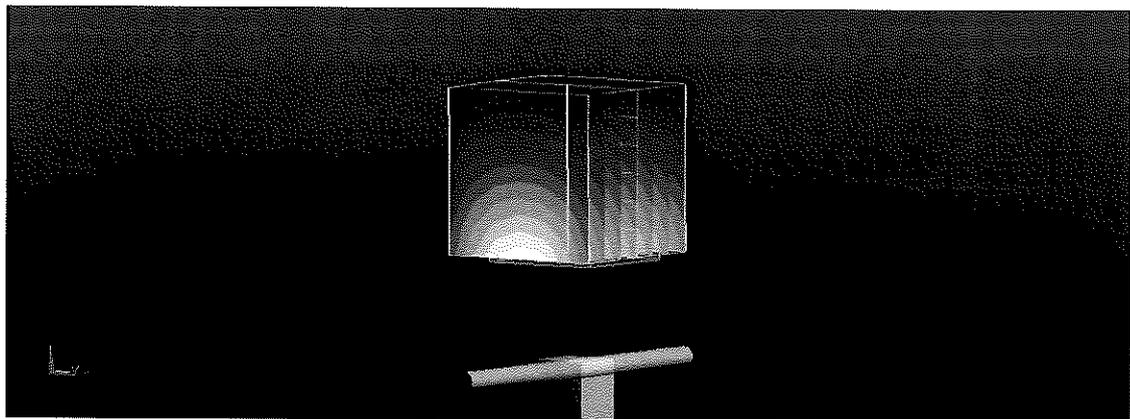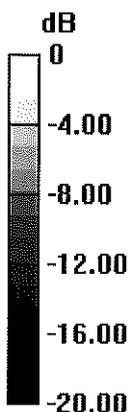

0 dB = 14.4 W/kg = 11.58 dBW/kg

# Impedance Measurement Plot for Body TSL

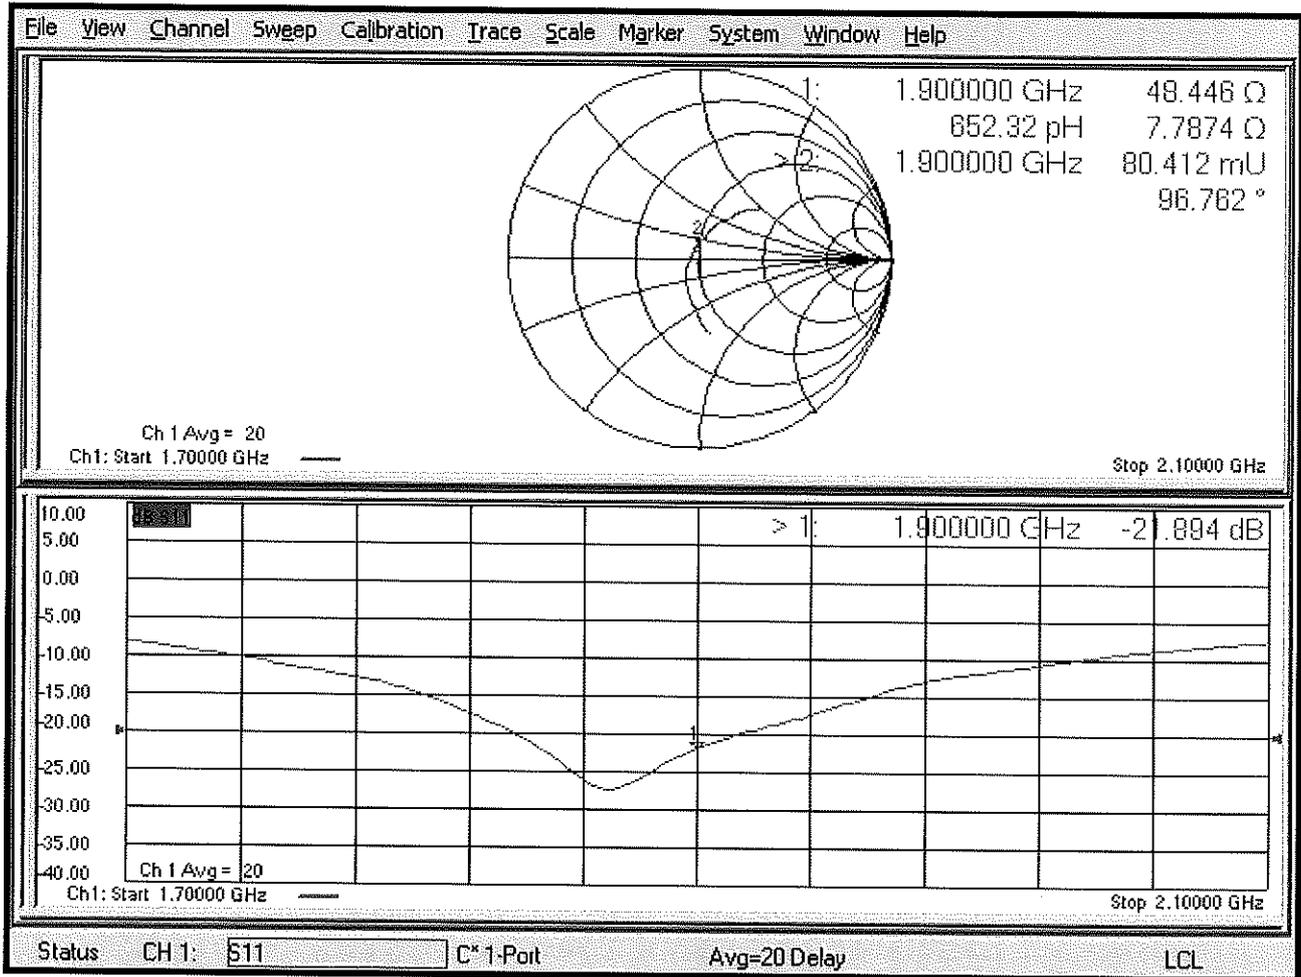

## Certification of Calibration

Object D1900V2 – SN: 5d148

Calibration procedure(s) Procedure for Calibration Extension for SAR Dipoles.

Extension Calibration date: 2/21/2020

Description: SAR Validation Dipole at 1900 MHz.

**Calibration Equipment used:**

| Manufacturer          | Model         | Description   | Cal Date   | Cal Interval | Cal Due    | Serial Number |
|-----------------------|---------------|---|------------|--------------|------------|---------------|
| Control Company       | 4040          | Therm./Clock/Humidity Monitor                           | 6/29/2019  | Biennial     | 6/29/2021  | 192291470     |
| Control Company       | 4352          | Ultra Long Stem Thermometer                             | 8/2/2018   | Biennial     | 8/2/2020   | 181334684     |
| Amplifier Research    | 15S1G6        | Amplifier   | CBT        | N/A          | CBT        | 433971        |
| Narda                 | 4772-3        | Attenuator (3dB)  | CBT        | N/A          | CBT        | 9406          |
| Keysight Technologies | 85033E        | Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm) | 7/2/2019   | Annual       | 7/2/2020   | MY53401181    |
| Rohde & Schwarz       | ZNLE6         | Vector Network Analyzer                                 | 10/11/2019 | Annual       | 10/11/2020 | 101307        |
| Mini-Circuits         | BW-N20W5+     | DC to 18 GHz Precision Fixed 20 dB Attenuator           | CBT        | N/A          | CBT        | N/A           |
| SPEAG                 | DAKS-3.5      | Portable DAK  | 9/10/2019  | Annual       | 9/10/2020  | 1045          |
| Anritsu               | MA2411B       | Pulse Power Sensor                                      | 8/14/2019  | Annual       | 8/14/2020  | 1315051       |
| Anritsu               | MA2411B       | Pulse Power Sensor                                      | 8/8/2019   | Annual       | 8/8/2020   | 1339008       |
| Anritsu               | ML2495A       | Power Meter   | 12/17/2019 | Annual       | 12/17/2020 | 941001        |
| Agilent               | N5182A        | MXG Vector Signal Generator                             | 8/19/2019  | Annual       | 8/19/2020  | MY47420837    |
| Seekonk               | NC-100        | Torque Wrench   | 5/9/2018   | Biennial     | 5/9/2020   | 22217         |
| MiniCircuits          | ZHDC-16-63-S+ | Bidirectional Coupler                                   | CBT        | N/A          | CBT        | N/A           |
| MiniCircuits          | VLF-6000+     | Low Pass Filter   | CBT        | N/A          | CBT        | N/A           |
| SPEAG                 | EX3DV4        | SAR Probe   | 9/19/2019  | Annual       | 9/19/2020  | 7551          |
| SPEAG                 | EX3DV4        | SAR Probe   | 7/16/2019  | Annual       | 7/16/2020  | 7410          |
| SPEAG                 | DAE4          | Dasy Data Acquisition Electronics                       | 9/17/2019  | Annual       | 9/17/2020  | 1333          |
| SPEAG                 | DAE4          | Dasy Data Acquisition Electronics                       | 7/11/2019  | Annual       | 7/11/2020  | 1322          |

Measurement Uncertainty =  $\pm 23\%$  (k=2)

|                | Name             | Function                 | Signature               |
|----------------|------------------|--------------------------|-------------------------|
| Calibrated By: | Brodie Halfoster | Test Engineer            | <i>BRODIE HALFOSTER</i> |
| Approved By:   | Kaitlin O'Keefe  | Senior Technical Manager | <i>KOK</i>              |

# DIPOLE CALIBRATION EXTENSION


Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:

1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.


The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:

| Calibration Date | Extension Date | Certificate Electrical Delay (ns) | Certificate SAR Target Head (1g) W/kg @ 20.0 dBm | Measured Head SAR (1g) W/kg @ 20.0 dBm | Deviation 1g (%) | Certificate SAR Target Head (10g) W/kg @ 20.0 dBm | Measured Head SAR (10g) W/kg @ 20.0 dBm | Deviation 10g (%) | Certificate Impedance Head (Ohm) Real | Measured Impedance Head (Ohm) Real | Difference (Ohm) Real | Certificate Impedance Head (Ohm) Imaginary | Measured Impedance Head (Ohm) Imaginary | Difference (Ohm) Imaginary | Certificate Return Loss Head (dB) | Measured Return Loss Head (dB) | Deviation (%) | PASS/FAIL |
|------------------|----------------|-----------------------------------|--|--|------------------|---|---|-------------------|---------------------------------------|------------------------------------|-----------------------|--|---|----------------------------|-----------------------------------|--------------------------------|---------------|-----------|
| 2/21/2019        | 2/21/2020      | 1.17                              | 3.91   | 4.15                                   | 6.14%            | 2.04  | 2.13                                    | 4.41%             | 51.8                                  | 53.7                               | 1.9                   | 6.8  | 2.7                                     | 4.1                        | -23.2                             | -27.1                          | -16.70%       | PASS      |
| Calibration Date | Extension Date | Certificate Electrical Delay (ns) | Certificate SAR Target Body (1g) W/kg @ 20.0 dBm | Measured Body SAR (1g) W/kg @ 20.0 dBm | Deviation 1g (%) | Certificate SAR Target Body (10g) W/kg @ 20.0 dBm | Measured Body SAR (10g) W/kg @ 20.0 dBm | Deviation 10g (%) | Certificate Impedance Body (Ohm) Real | Measured Impedance Body (Ohm) Real | Difference (Ohm) Real | Certificate Impedance Body (Ohm) Imaginary | Measured Impedance Body (Ohm) Imaginary | Difference (Ohm) Imaginary | Certificate Return Loss Body (dB) | Measured Return Loss Body (dB) | Deviation (%) | PASS/FAIL |
| 2/21/2019        | 2/21/2020      | 1.17                              | 3.91   | 4.06                                   | 3.84%            | 2.05  | 2.08                                    | 1.46%             | 48.4                                  | 50.9                               | 2.5                   | 7.8  | 5.4                                     | 2.4                        | -21.9                             | -25.3                          | -15.60%       | PASS      |

### Impedance & Return-Loss Measurement Plot for Head TSL

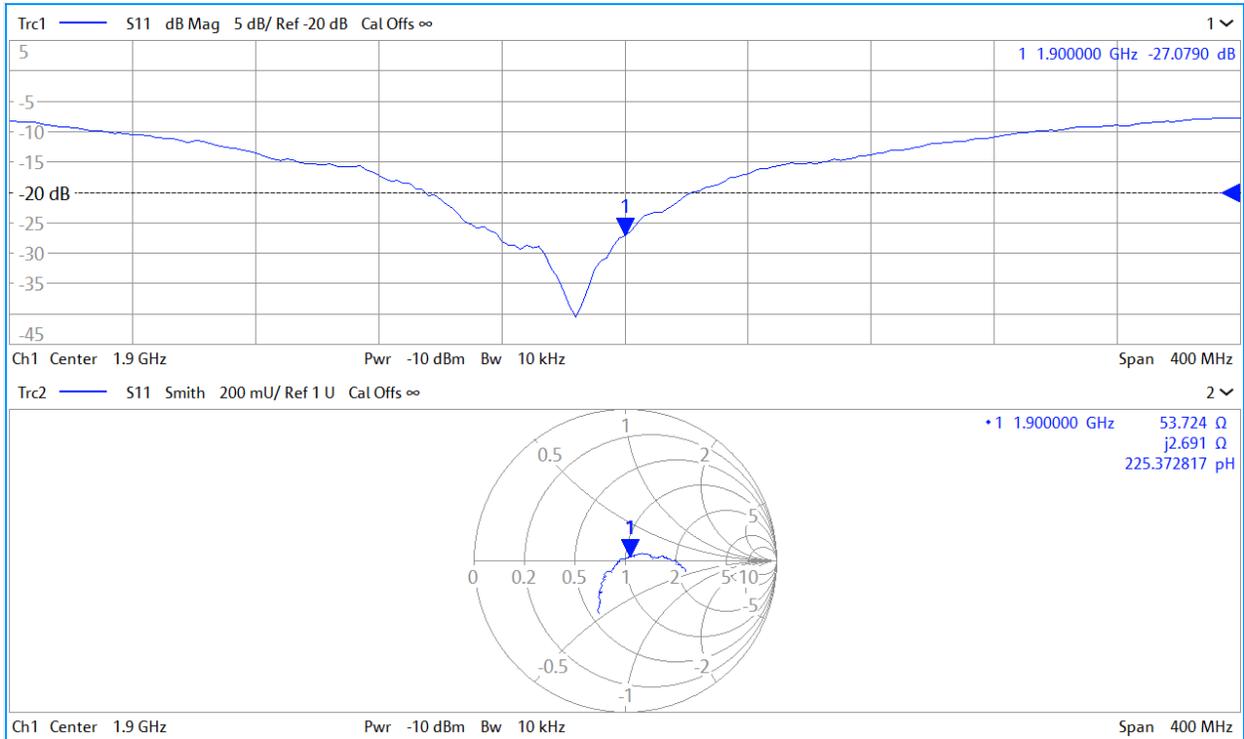

# Impedance & Return-Loss Measurement Plot for Body TSL

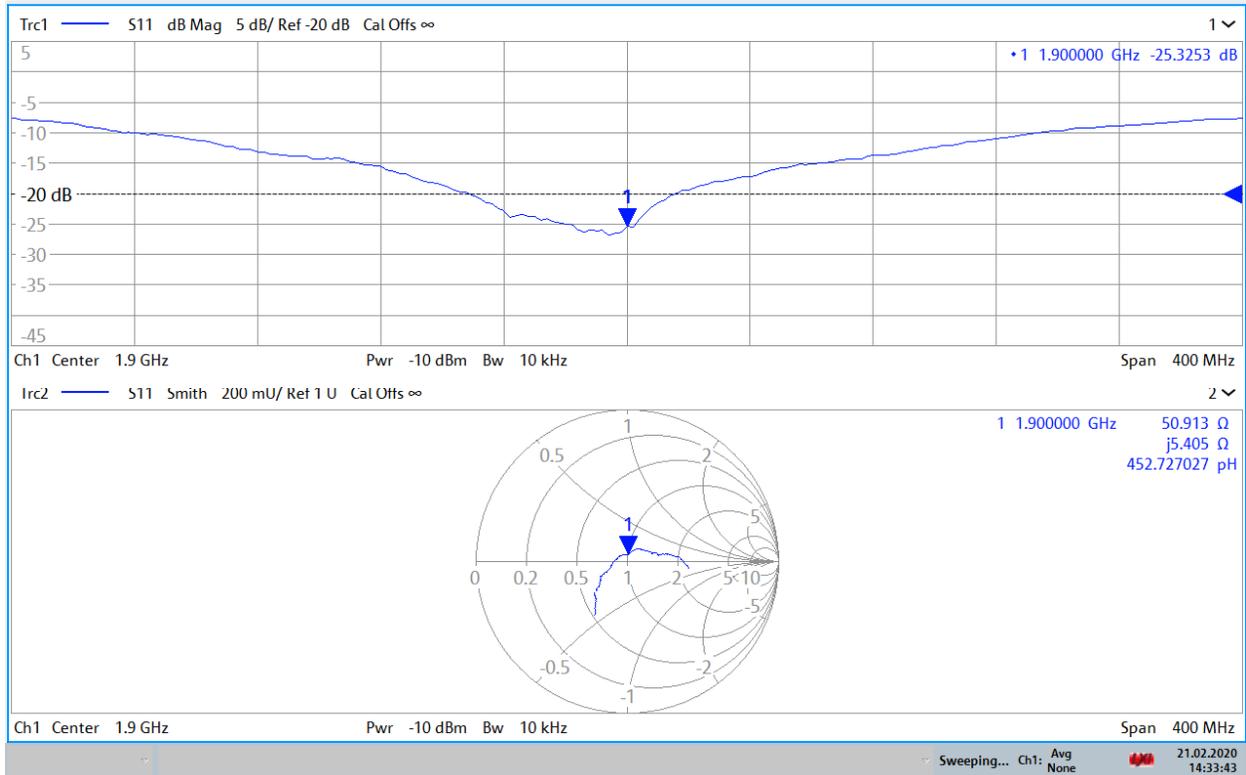

14:33:44 21.02.2020



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D3700V2-1067\_Jan20**

## CALIBRATION CERTIFICATE

Object **D3700V2 - SN:1067**

Calibration procedure(s) **QA CAL-22.v4  
Calibration Procedure for SAR Validation Sources between 3-6 GHz**

Calibration date: **January 21, 2020**

*BNV  
02-02-2020*

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)      | Scheduled Calibration |
|-----------------------------|--------------------|---------------------------------|-----------------------|
| Power meter NRP             | SN: 104778         | 03-Apr-19 (No. 217-02892/02893) | Apr-20                |
| Power sensor NRP-Z91        | SN: 103244         | 03-Apr-19 (No. 217-02892)       | Apr-20                |
| Power sensor NRP-Z91        | SN: 103245         | 03-Apr-19 (No. 217-02893)       | Apr-20                |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 04-Apr-19 (No. 217-02894)       | Apr-20                |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 04-Apr-19 (No. 217-02895)       | Apr-20                |
| Reference Probe EX3DV4      | SN: 3503           | 31-Dec-19 (No. EX3-3503_Dec19)  | Dec-20                |
| DAE4                        | SN: 601            | 27-Dec-19 (No. DAE4-601_Dec19)  | Dec-20                |

| Secondary Standards             | ID #           | Check Date (in house)             | Scheduled Check        |
|---------------------------------|----------------|-----------------------------------|------------------------|
| Power meter E4419B              | SN: GB39512475 | 30-Oct-14 (in house check Feb-19) | In house check: Oct-20 |
| Power sensor HP 8481A           | SN: US37292783 | 07-Oct-15 (in house check Oct-18) | In house check: Oct-20 |
| Power sensor HP 8481A           | SN: MY41092317 | 07-Oct-15 (in house check Oct-18) | In house check: Oct-20 |
| RF generator R&S SMT-06         | SN: 100972     | 15-Jun-15 (in house check Oct-18) | In house check: Oct-20 |
| Network Analyzer Agilent E8358A | SN: US41080477 | 31-Mar-14 (in house check Oct-19) | In house check: Oct-20 |

Calibrated by: **Jeton Kastrati**      Function: **Laboratory Technician**      Signature: *[Signature]*

Approved by: **Katja Pokovic**      Technical Manager      *[Signature]*

Issued: January 22, 2020

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

### Glossary:

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                                     |                            |                                  |
|-------------------------------------|----------------------------|----------------------------------|
| <b>DASY Version</b>                 | DASY5                      | V52.10.3                         |
| <b>Extrapolation</b>                | Advanced Extrapolation     |                                  |
| <b>Phantom</b>                      | Modular Flat Phantom       |                                  |
| <b>Distance Dipole Center - TSL</b> | 10 mm                      | with Spacer                      |
| <b>Zoom Scan Resolution</b>         | dx, dy = 4 mm, dz = 1.4 mm | Graded Ratio = 1.4 (Z direction) |
| <b>Frequency</b>                    | 3700 MHz $\pm$ 1 MHz       |                                  |

## Head TSL parameters

The following parameters and calculations were applied.

|  | Temperature         | Permittivity   | Conductivity         |
|--|---------------------|----------------|----------------------|
| <b>Nominal Head TSL parameters</b>             | 22.0 °C             | 37.7           | 3.12 mho/m           |
| <b>Measured Head TSL parameters</b>            | (22.0 $\pm$ 0.2) °C | 36.8 $\pm$ 6 % | 3.05 mho/m $\pm$ 6 % |
| <b>Head TSL temperature change during test</b> | < 0.5 °C            | ----           | ----                 |

## SAR result with Head TSL

| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b> | Condition          |  |
|---|--------------------|--|
| SAR measured  | 100 mW input power | 6.72 W/kg                                      |
| SAR for nominal Head TSL parameters                         | normalized to 1W   | <b>67.2 W/kg <math>\pm</math> 19.9 % (k=2)</b> |

| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b> | condition          |  |
|---|--------------------|--|
| SAR measured  | 100 mW input power | 2.44 W/kg                                      |
| SAR for nominal Head TSL parameters                           | normalized to 1W   | <b>24.3 W/kg <math>\pm</math> 19.5 % (k=2)</b> |

## Body TSL parameters

The following parameters and calculations were applied.

|  | Temperature         | Permittivity   | Conductivity         |
|--|---------------------|----------------|----------------------|
| <b>Nominal Body TSL parameters</b>             | 22.0 °C             | 51.0           | 3.55 mho/m           |
| <b>Measured Body TSL parameters</b>            | (22.0 $\pm$ 0.2) °C | 49.5 $\pm$ 6 % | 3.54 mho/m $\pm$ 6 % |
| <b>Body TSL temperature change during test</b> | < 0.5 °C            | ----           | ----                 |

## SAR result with Body TSL

| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b> | Condition          |  |
|---|--------------------|--|
| SAR measured  | 100 mW input power | 6.56 W/kg                                      |
| SAR for nominal Body TSL parameters                         | normalized to 1W   | <b>65.2 W/kg <math>\pm</math> 19.9 % (k=2)</b> |

| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b> | condition          |  |
|---|--------------------|--|
| SAR measured  | 100 mW input power | 2.34 W/kg                                      |
| SAR for nominal Body TSL parameters                           | normalized to 1W   | <b>23.3 W/kg <math>\pm</math> 19.5 % (k=2)</b> |

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 48.7 $\Omega$ - 0.4 j $\Omega$ |
| Return Loss                          | - 37.4 dB                      |

### Antenna Parameters with Body TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 47.6 $\Omega$ + 1.9 j $\Omega$ |
| Return Loss                          | - 30.2 dB                      |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.141 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |       |
|-----------------|-------|
| Manufactured by | SPEAG |
|-----------------|-------|

# DASY5 Validation Report for Head TSL

Date: 21.01.2020

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 3700 MHz; Type: D3700V2; Serial: D3700V2 - SN:1067**

Communication System: UID 0 - CW; Frequency: 3700 MHz

Medium parameters used:  $f = 3700$  MHz;  $\sigma = 3.05$  S/m;  $\epsilon_r = 36.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(7.73, 7.73, 7.73) @ 3700 MHz; Calibrated: 31.12.2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.12.2019
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

## Dipole Calibration for Head Tissue/Pin=100 mW, d=10mm/Zoom Scan, dist=1.4mm

**(8x8x8)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 70.34 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 19.4 W/kg

**SAR(1 g) = 6.72 W/kg; SAR(10 g) = 2.44 W/kg**

Smallest distance from peaks to all points 3 dB below = 8.4 mm


Ratio of SAR at M2 to SAR at M1 = 72.9%

Maximum value of SAR (measured) = 13.4 W/kg

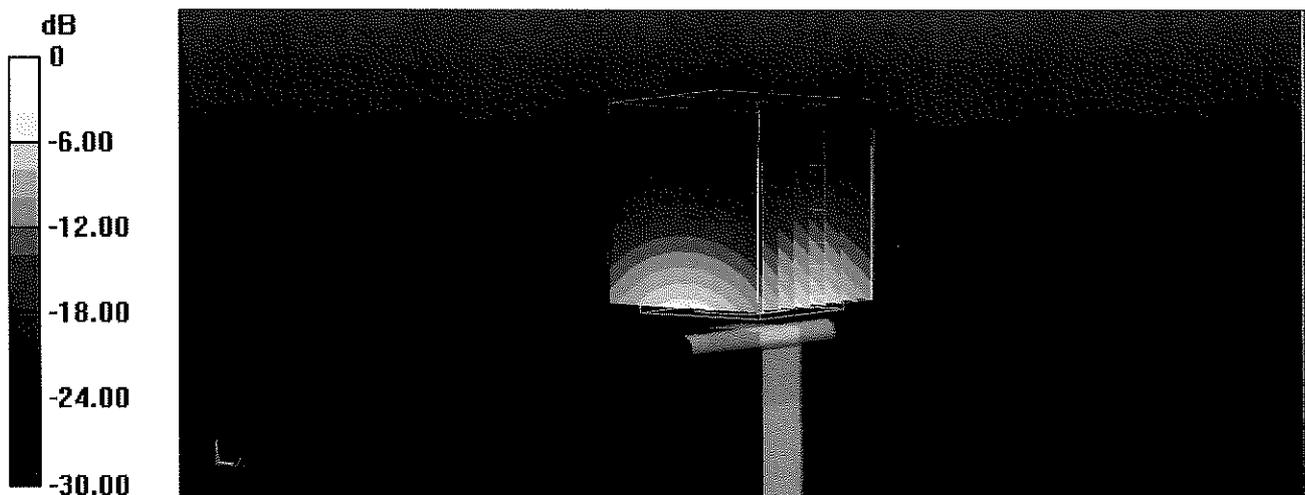

0 dB = 13.4 W/kg = 11.27 dBW/kg

# Impedance Measurement Plot for Head TSL

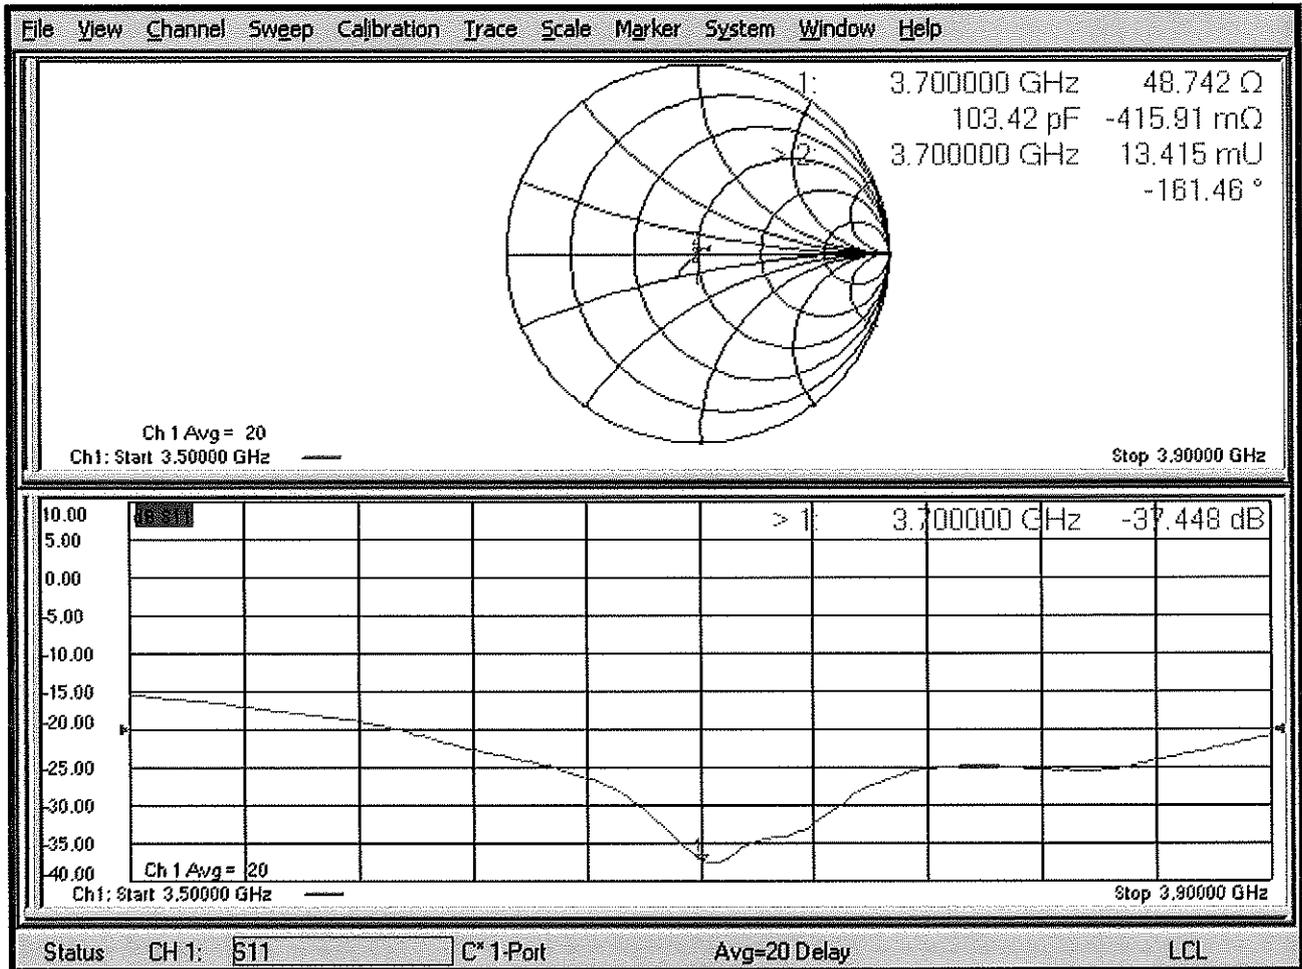

# DASY5 Validation Report for Body TSL

Date: 21.01.2020

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 3700 MHz; Type: D3700V2; Serial: D3700V2 - SN:1067**

Communication System: UID 0 - CW; Frequency: 3700 MHz

Medium parameters used:  $f = 3700$  MHz;  $\sigma = 3.54$  S/m;  $\epsilon_r = 49.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(7.31, 7.31, 7.31) @ 3700 MHz; Calibrated: 31.12.2019
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 27.12.2019
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

## Dipole Calibration for Body Tissue/Pin=100 mW, d=10mm/Zoom Scan , dist=1.4mm

(9x9x8)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 63.54 V/m; Power Drift = -0.07 dB



Peak SAR (extrapolated) = 18.1 W/kg

**SAR(1 g) = 6.56 W/kg; SAR(10 g) = 2.34 W/kg**

Smallest distance from peaks to all points 3 dB below = 7.9 mm


Ratio of SAR at M2 to SAR at M1 = 74.3%

Maximum value of SAR (measured) = 13.3 W/kg

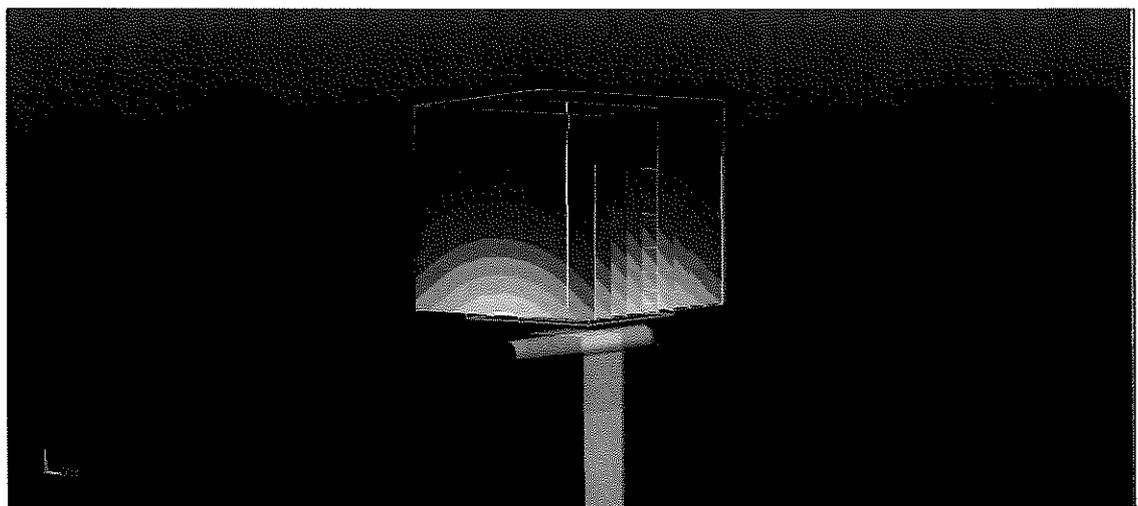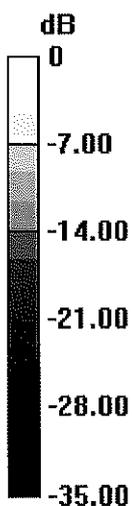

0 dB = 13.3 W/kg = 11.24 dBW/kg

# Impedance Measurement Plot for Body TSL

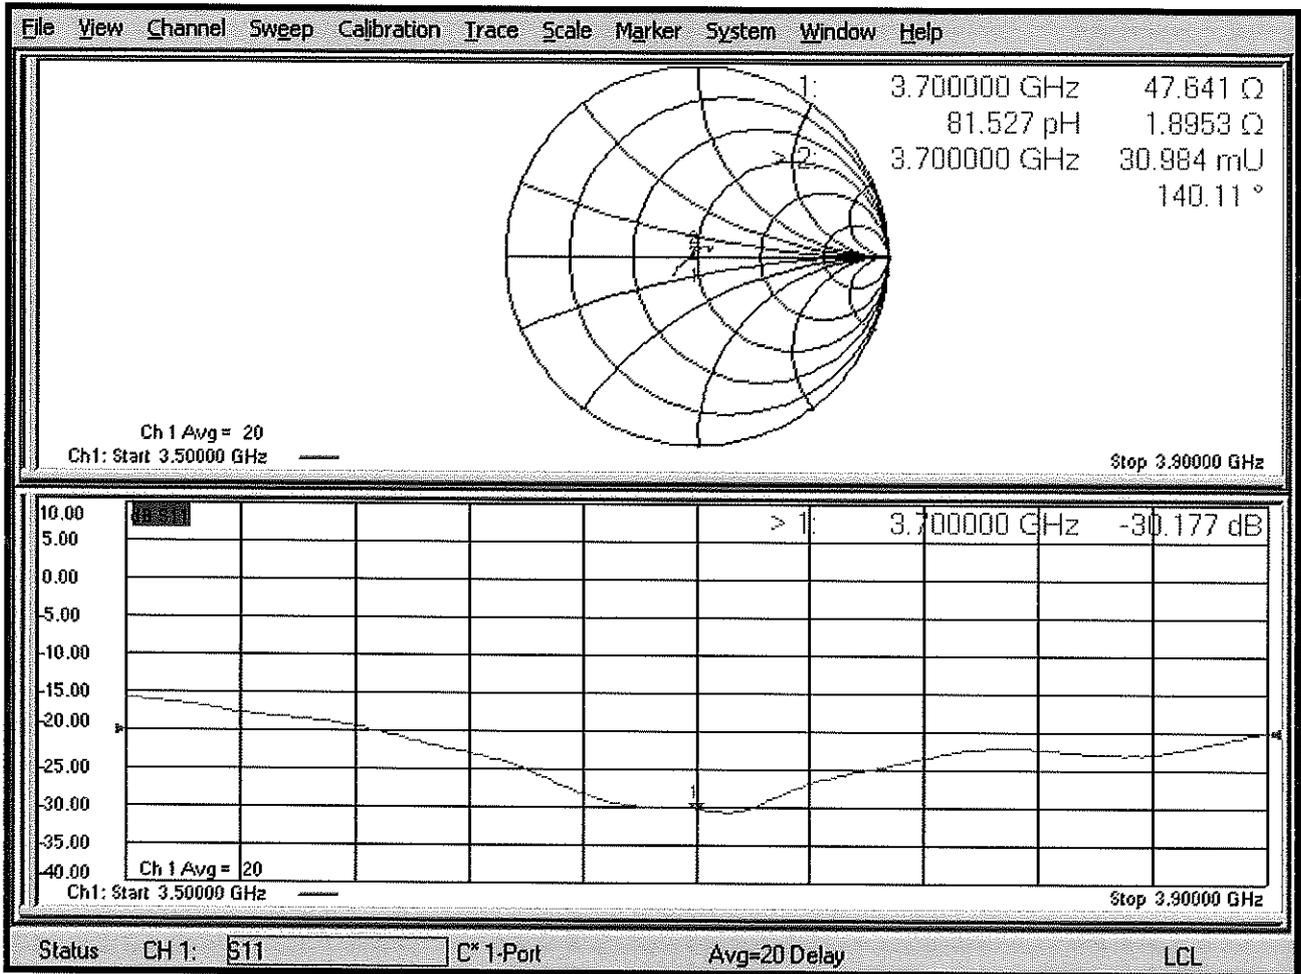

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **EX3-7526\_Mar20**

## CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:7526**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-14.v5, QA CAL-23.v5, QA CAL-25.v7**  
**Calibration procedure for dosimetric E-field probes**

Calibration date: **March 18, 2020**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^\circ\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

*BNV*  
*04-2-2020*

| Primary Standards          | ID               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|------------------|-----------------------------------|------------------------|
| Power meter NRP            | SN: 104778       | 03-Apr-19 (No. 217-02892/02893)   | Apr-20                 |
| Power sensor NRP-Z91       | SN: 103244       | 03-Apr-19 (No. 217-02892)         | Apr-20                 |
| Power sensor NRP-Z91       | SN: 103245       | 03-Apr-19 (No. 217-02893)         | Apr-20                 |
| Reference 20 dB Attenuator | SN: S5277 (20x)  | 04-Apr-19 (No. 217-02894)         | Apr-20                 |
| DAE4                       | SN: 660          | 27-Dec-19 (No. DAE4-660_Dec19)    | Dec-20                 |
| Reference Probe ES3DV2     | SN: 3013         | 31-Dec-19 (No. ES3-3013_Dec19)    | Dec-20                 |
| Secondary Standards        | ID               | Check Date (in house)             | Scheduled Check        |
| Power meter E4419B         | SN: GB41293874   | 06-Apr-16 (in house check Jun-18) | In house check: Jun-20 |
| Power sensor E4412A        | SN: MY41498087   | 06-Apr-16 (in house check Jun-18) | In house check: Jun-20 |
| Power sensor E4412A        | SN: 000110210    | 06-Apr-16 (in house check Jun-18) | In house check: Jun-20 |
| RF generator HP 8648C      | SN: US3642U01700 | 04-Aug-99 (in house check Jun-18) | In house check: Jun-20 |
| Network Analyzer E8358A    | SN: US41080477   | 31-Mar-14 (in house check Oct-19) | In house check: Oct-20 |

|                |                               |  |               |
|----------------|-------------------------------|--|---------------|
| Calibrated by: | Name<br><b>Jeton Kastrati</b> | Function<br><b>Laboratory Technician</b> | Signature<br> |
| Approved by:   | Name<br><b>Katja Pokovic</b>  | Function<br><b>Technical Manager</b>     | Signature<br> |

Issued: March 18, 2020

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

**Glossary:**

|                       |  |
|-----------------------|--|
| TSL                   | tissue simulating liquid   |
| NORM <sub>x,y,z</sub> | sensitivity in free space  |
| ConvF                 | sensitivity in TSL / NORM <sub>x,y,z</sub>   |
| DCP                   | diode compression point  |
| CF                    | crest factor (1/duty_cycle) of the RF signal   |
| A, B, C, D            | modulation dependent linearization parameters  |
| Polarization φ        | φ rotation around probe axis   |
| Polarization θ        | θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., θ = 0 is normal to probe axis |
| Connector Angle       | information used in DASY system to align probe sensor X to the robot coordinate system   |

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- d) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Methods Applied and Interpretation of Parameters:**

- *NORM<sub>x,y,z</sub>*: Assessed for E-field polarization θ = 0 (f ≤ 900 MHz in TEM-cell; f > 1800 MHz: R22 waveguide). *NORM<sub>x,y,z</sub>* are only intermediate values, i.e., the uncertainties of *NORM<sub>x,y,z</sub>* does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below *ConvF*).
- *NORM(f)<sub>x,y,z</sub> = NORM<sub>x,y,z</sub> \* frequency\_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- *DCP<sub>x,y,z</sub>*: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- *PAR*: The Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- *A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>; A, B, C, D* are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. *VR* is the maximum calibration range expressed in RMS voltage across the diode.
- *ConvF and Boundary Effect Parameters*: Assessed in flat phantom using E-field (or Temperature Transfer Standard for f ≤ 800 MHz) and inside waveguide using analytical field distributions based on power measurements for f > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to *NORM<sub>x,y,z</sub> \* ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- *Spherical isotropy (3D deviation from isotropy)*: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- *Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- *Connector Angle*: The angle is assessed using the information gained by determining the *NORM<sub>x</sub>* (no uncertainty required).

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:7526

### Basic Calibration Parameters

|   | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|---|----------|----------|----------|-----------|
| Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup> | 0.40     | 0.43     | 0.39     | ± 10.1 %  |
| DCP (mV) <sup>B</sup>                                     | 100.0    | 96.5     | 100.0    |           |

### Calibration Results for Modulation Response

| UID       | Communication System Name   |   | A<br>dB | B<br>dB $\sqrt{\mu\text{V}}$ | C     | D<br>dB | VR<br>mV | Max<br>dev. | Max<br>Unc <sup>E</sup><br>(k=2) |
|-----------|-----------------------------|---|---------|------------------------------|-------|---------|----------|-------------|----------------------------------|
| 0         | CW                          | X | 0.00    | 0.00                         | 1.00  | 0.00    | 144.6    | ± 3.0 %     | ± 4.7 %                          |
|           |                             | Y | 0.00    | 0.00                         | 1.00  |         | 153.6    |             |                                  |
|           |                             | Z | 0.00    | 0.00                         | 1.00  |         | 139.6    |             |                                  |
| 10352-AAA | Pulse Waveform (200Hz, 10%) | X | 2.27    | 64.83                        | 9.33  | 10.00   | 60.0     | ± 2.6 %     | ± 9.6 %                          |
|           |                             | Y | 1.47    | 61.47                        | 7.92  |         | 60.0     |             |                                  |
|           |                             | Z | 2.24    | 64.75                        | 9.49  |         | 60.0     |             |                                  |
| 10353-AAA | Pulse Waveform (200Hz, 20%) | X | 1.19    | 62.89                        | 7.51  | 6.99    | 80.0     | ± 1.8 %     | ± 9.6 %                          |
|           |                             | Y | 0.92    | 61.50                        | 6.65  |         | 80.0     |             |                                  |
|           |                             | Z | 1.48    | 64.63                        | 8.40  |         | 80.0     |             |                                  |
| 10354-AAA | Pulse Waveform (200Hz, 40%) | X | 0.47    | 60.82                        | 5.72  | 3.98    | 95.0     | ± 1.1 %     | ± 9.6 %                          |
|           |                             | Y | 0.37    | 60.00                        | 4.48  |         | 95.0     |             |                                  |
|           |                             | Z | 0.70    | 63.37                        | 6.83  |         | 95.0     |             |                                  |
| 10355-AAA | Pulse Waveform (200Hz, 60%) | X | 0.29    | 61.21                        | 5.28  | 2.22    | 120.0    | ± 1.2 %     | ± 9.6 %                          |
|           |                             | Y | 0.27    | 60.00                        | 2.87  |         | 120.0    |             |                                  |
|           |                             | Z | 0.26    | 60.73                        | 4.80  |         | 120.0    |             |                                  |
| 10387-AAA | QPSK Waveform, 1 MHz        | X | 1.69    | 69.60                        | 16.08 | 1.00    | 150.0    | ± 3.3 %     | ± 9.6 %                          |
|           |                             | Y | 1.47    | 67.72                        | 14.75 |         | 150.0    |             |                                  |
|           |                             | Z | 2.01    | 73.12                        | 17.66 |         | 150.0    |             |                                  |
| 10388-AAA | QPSK Waveform, 10 MHz       | X | 2.10    | 68.63                        | 16.26 | 0.00    | 150.0    | ± 1.1 %     | ± 9.6 %                          |
|           |                             | Y | 1.98    | 67.68                        | 15.60 |         | 150.0    |             |                                  |
|           |                             | Z | 2.27    | 70.41                        | 17.22 |         | 150.0    |             |                                  |
| 10396-AAA | 64-QAM Waveform, 100 kHz    | X | 2.44    | 69.62                        | 18.47 | 3.01    | 150.0    | ± 0.8 %     | ± 9.6 %                          |
|           |                             | Y | 2.15    | 66.59                        | 17.11 |         | 150.0    |             |                                  |
|           |                             | Z | 2.58    | 70.98                        | 19.23 |         | 150.0    |             |                                  |
| 10399-AAA | 64-QAM Waveform, 40 MHz     | X | 3.41    | 67.32                        | 15.99 | 0.00    | 150.0    | ± 2.2 %     | ± 9.6 %                          |
|           |                             | Y | 3.35    | 66.94                        | 15.77 |         | 150.0    |             |                                  |
|           |                             | Z | 3.49    | 68.04                        | 16.43 |         | 150.0    |             |                                  |
| 10414-AAA | WLAN CCDF, 64-QAM, 40MHz    | X | 4.63    | 65.89                        | 15.72 | 0.00    | 150.0    | ± 4.0 %     | ± 9.6 %                          |
|           |                             | Y | 4.61    | 65.72                        | 15.68 |         | 150.0    |             |                                  |
|           |                             | Z | 4.69    | 66.35                        | 16.02 |         | 150.0    |             |                                  |

Note: For details on UID parameters see Appendix

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of Norm X,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:7526

### Sensor Model Parameters

|   | C1<br>fF | C2<br>fF | $\alpha$<br>V <sup>-1</sup> | T1<br>ms.V <sup>-2</sup> | T2<br>ms.V <sup>-1</sup> | T3<br>ms | T4<br>V <sup>-2</sup> | T5<br>V <sup>-1</sup> | T6   |
|---|----------|----------|-----------------------------|--------------------------|--------------------------|----------|-----------------------|-----------------------|------|
| X | 28.7     | 212.51   | 35.16                       | 5.03                     | 0.00                     | 4.98     | 1.61                  | 0.00                  | 1.00 |
| Y | 28.8     | 222.60   | 37.67                       | 2.60                     | 0.00                     | 5.03     | 0.04                  | 0.29                  | 1.00 |
| Z | 27.4     | 203.13   | 35.18                       | 4.45                     | 0.03                     | 5.00     | 1.43                  | 0.03                  | 1.00 |

### Other Probe Parameters

|   |            |
|---|------------|
| Sensor Arrangement                            | Triangular |
| Connector Angle (°)                           | 124.4      |
| Mechanical Surface Detection Mode             | enabled    |
| Optical Surface Detection Mode                | disabled   |
| Probe Overall Length                          | 337 mm     |
| Probe Body Diameter                           | 10 mm      |
| Tip Length                                    | 9 mm       |
| Tip Diameter                                  | 2.5 mm     |
| Probe Tip to Sensor X Calibration Point       | 1 mm       |
| Probe Tip to Sensor Y Calibration Point       | 1 mm       |
| Probe Tip to Sensor Z Calibration Point       | 1 mm       |
| Recommended Measurement Distance from Surface | 1.4 mm     |

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:7526

### Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) <sup>c</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unc (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-----------|
| 750                  | 41.9                               | 0.89                            | 9.41    | 9.41    | 9.41    | 0.66               | 0.80                    | ± 12.0 %  |
| 835                  | 41.5                               | 0.90                            | 9.17    | 9.17    | 9.17    | 0.61               | 0.80                    | ± 12.0 %  |
| 1750                 | 40.1                               | 1.37                            | 7.96    | 7.96    | 7.96    | 0.34               | 0.88                    | ± 12.0 %  |
| 1900                 | 40.0                               | 1.40                            | 7.63    | 7.63    | 7.63    | 0.33               | 0.88                    | ± 12.0 %  |
| 2300                 | 39.5                               | 1.67                            | 7.50    | 7.50    | 7.50    | 0.32               | 0.90                    | ± 12.0 %  |
| 2450                 | 39.2                               | 1.80                            | 7.24    | 7.24    | 7.24    | 0.39               | 0.90                    | ± 12.0 %  |
| 2600                 | 39.0                               | 1.96                            | 7.02    | 7.02    | 7.02    | 0.36               | 0.95                    | ± 12.0 %  |
| 3500                 | 37.9                               | 2.91                            | 6.43    | 6.43    | 6.43    | 0.35               | 1.30                    | ± 13.1 %  |
| 3700                 | 37.7                               | 3.12                            | 6.31    | 6.31    | 6.31    | 0.30               | 1.30                    | ± 13.1 %  |

<sup>c</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:7526

### Calibration Parameter Determined in Body Tissue Simulating Media


| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unc (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-----------|
| 750                  | 55.5                               | 0.96                            | 9.87    | 9.87    | 9.87    | 0.47               | 0.80                    | ± 12.0 %  |
| 835                  | 55.2                               | 0.97                            | 9.55    | 9.55    | 9.55    | 0.46               | 0.87                    | ± 12.0 %  |
| 1750                 | 53.4                               | 1.49                            | 7.62    | 7.62    | 7.62    | 0.41               | 0.88                    | ± 12.0 %  |
| 1900                 | 53.3                               | 1.52                            | 7.33    | 7.33    | 7.33    | 0.39               | 0.88                    | ± 12.0 %  |
| 2300                 | 52.9                               | 1.81                            | 7.31    | 7.31    | 7.31    | 0.40               | 0.95                    | ± 12.0 %  |
| 2450                 | 52.7                               | 1.95                            | 7.22    | 7.22    | 7.22    | 0.36               | 0.95                    | ± 12.0 %  |
| 2600                 | 52.5                               | 2.16                            | 7.00    | 7.00    | 7.00    | 0.30               | 0.95                    | ± 12.0 %  |
| 3500                 | 51.3                               | 3.31                            | 6.20    | 6.20    | 6.20    | 0.45               | 1.35                    | ± 13.1 %  |
| 3700                 | 51.0                               | 3.55                            | 5.80    | 5.80    | 5.80    | 0.40               | 1.35                    | ± 13.1 %  |

<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Validity of ConvF assessed at 6 MHz is 4-9 MHz, and ConvF assessed at 13 MHz is 9-19 MHz. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

### Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)


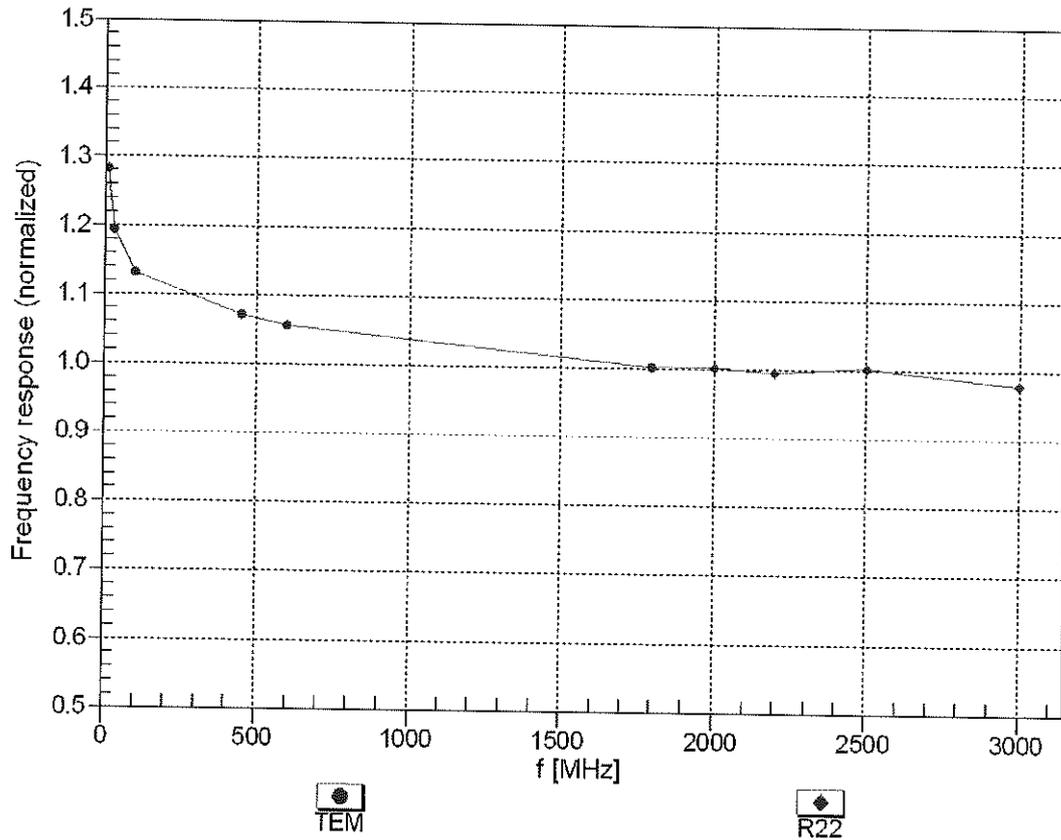


Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)

### Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$



f=600 MHz,TEM

f=1800 MHz,R22

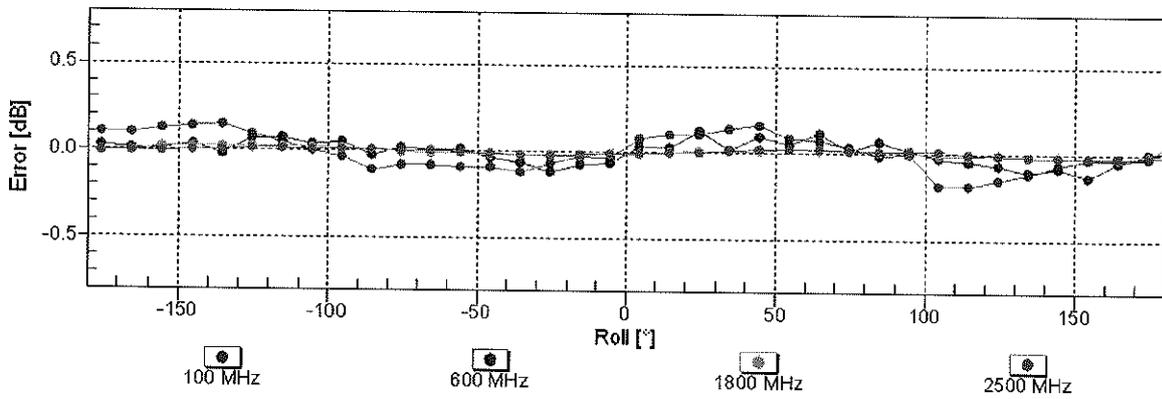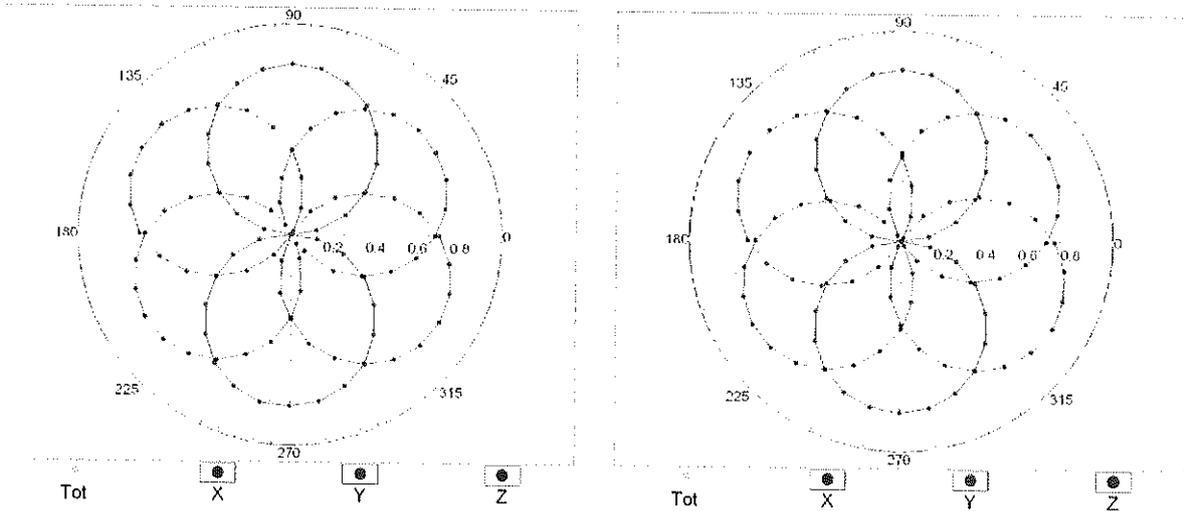


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

### Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f_{\text{eval}}= 1900 \text{ MHz}$ )

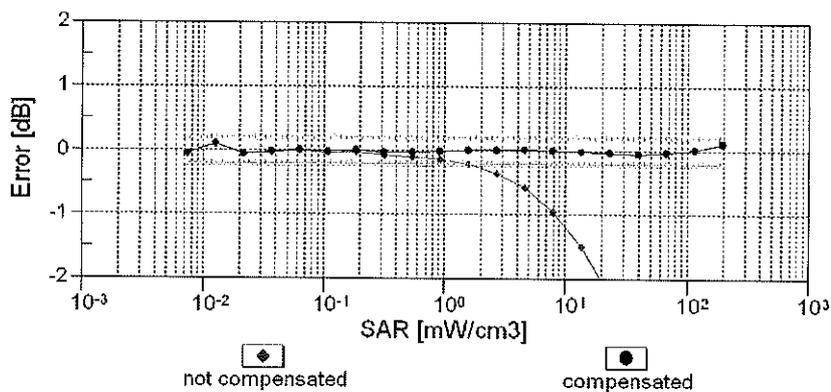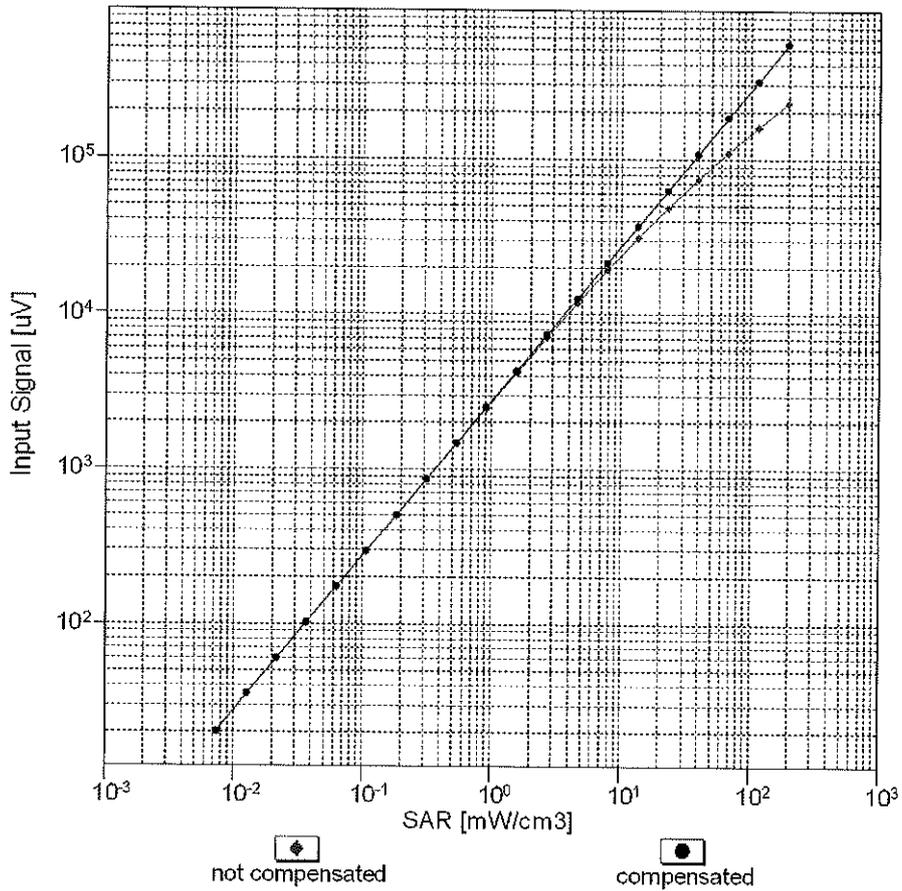


Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )

## Conversion Factor Assessment

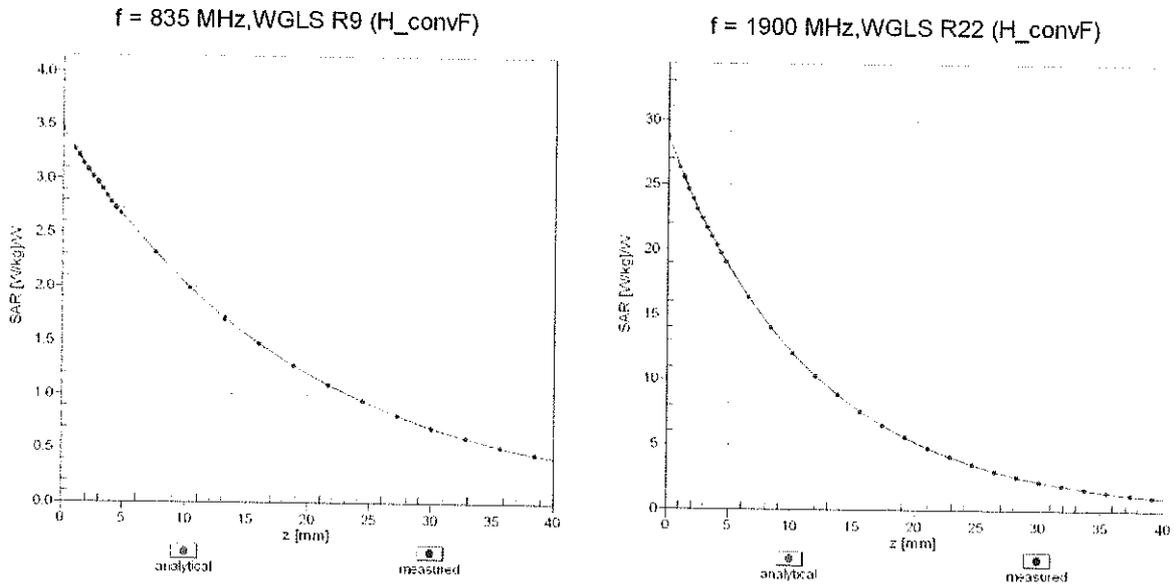

## Deviation from Isotropy in Liquid Error ( $\phi, \vartheta$ ), f = 900 MHz

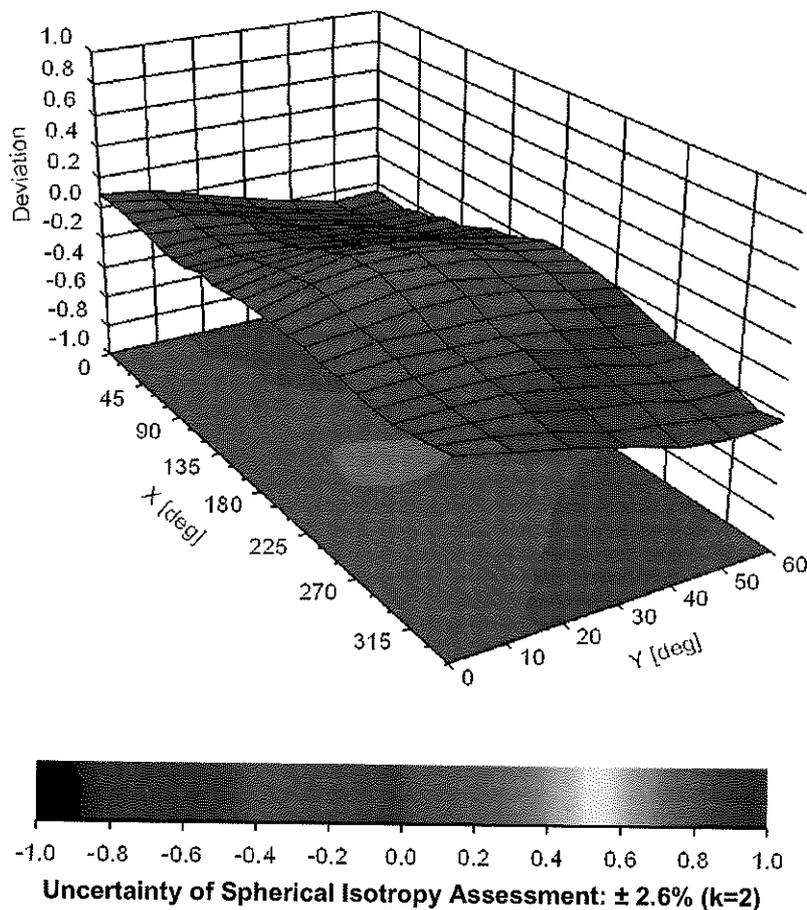

## Appendix: Modulation Calibration Parameters

| UID   | Rev | Communication System Name                           | Group     | PAR (dB) | Unc <sup>E</sup> (k=2) |
|-------|-----|---|-----------|----------|------------------------|
| 0     |     | CW  | CW        | 0.00     | ± 4.7 %                |
| 10010 | CAA | SAR Validation (Square, 100ms, 10ms)                | Test      | 10.00    | ± 9.6 %                |
| 10011 | CAB | UMTS-FDD (WCDMA)                                    | WCDMA     | 2.91     | ± 9.6 %                |
| 10012 | CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)            | WLAN      | 1.87     | ± 9.6 %                |
| 10013 | CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)       | WLAN      | 9.46     | ± 9.6 %                |
| 10021 | DAC | GSM-FDD (TDMA, GMSK)                                | GSM       | 9.39     | ± 9.6 %                |
| 10023 | DAC | GPRS-FDD (TDMA, GMSK, TN 0)                         | GSM       | 9.57     | ± 9.6 %                |
| 10024 | DAC | GPRS-FDD (TDMA, GMSK, TN 0-1)                       | GSM       | 6.56     | ± 9.6 %                |
| 10025 | DAC | EDGE-FDD (TDMA, 8PSK, TN 0)                         | GSM       | 12.62    | ± 9.6 %                |
| 10026 | DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1)                       | GSM       | 9.55     | ± 9.6 %                |
| 10027 | DAC | GPRS-FDD (TDMA, GMSK, TN 0-1-2)                     | GSM       | 4.80     | ± 9.6 %                |
| 10028 | DAC | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)                   | GSM       | 3.55     | ± 9.6 %                |
| 10029 | DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1-2)                     | GSM       | 7.78     | ± 9.6 %                |
| 10030 | CAA | IEEE 802.15.1 Bluetooth (GFSK, DH1)                 | Bluetooth | 5.30     | ± 9.6 %                |
| 10031 | CAA | IEEE 802.15.1 Bluetooth (GFSK, DH3)                 | Bluetooth | 1.87     | ± 9.6 %                |
| 10032 | CAA | IEEE 802.15.1 Bluetooth (GFSK, DH5)                 | Bluetooth | 1.16     | ± 9.6 %                |
| 10033 | CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)           | Bluetooth | 7.74     | ± 9.6 %                |
| 10034 | CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)           | Bluetooth | 4.53     | ± 9.6 %                |
| 10035 | CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)           | Bluetooth | 3.83     | ± 9.6 %                |
| 10036 | CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH1)               | Bluetooth | 8.01     | ± 9.6 %                |
| 10037 | CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH3)               | Bluetooth | 4.77     | ± 9.6 %                |
| 10038 | CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH5)               | Bluetooth | 4.10     | ± 9.6 %                |
| 10039 | CAB | CDMA2000 (1xRTT, RC1)                               | CDMA2000  | 4.57     | ± 9.6 %                |
| 10042 | CAB | IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate) | AMPS      | 7.78     | ± 9.6 %                |
| 10044 | CAA | IS-91/EIA/TIA-553 FDD (FDMA, FM)                    | AMPS      | 0.00     | ± 9.6 %                |
| 10048 | CAA | DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)           | DECT      | 13.80    | ± 9.6 %                |
| 10049 | CAA | DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)         | DECT      | 10.79    | ± 9.6 %                |
| 10056 | CAA | UMTS-TDD (TD-SCDMA, 1.28 Mcps)                      | TD-SCDMA  | 11.01    | ± 9.6 %                |
| 10058 | DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)                   | GSM       | 6.52     | ± 9.6 %                |
| 10059 | CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)            | WLAN      | 2.12     | ± 9.6 %                |
| 10060 | CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)          | WLAN      | 2.83     | ± 9.6 %                |
| 10061 | CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)           | WLAN      | 3.60     | ± 9.6 %                |
| 10062 | CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)            | WLAN      | 8.68     | ± 9.6 %                |
| 10063 | CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)            | WLAN      | 8.63     | ± 9.6 %                |
| 10064 | CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps)           | WLAN      | 9.09     | ± 9.6 %                |
| 10065 | CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)           | WLAN      | 9.00     | ± 9.6 %                |
| 10066 | CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps)           | WLAN      | 9.38     | ± 9.6 %                |
| 10067 | CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)           | WLAN      | 10.12    | ± 9.6 %                |
| 10068 | CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)           | WLAN      | 10.24    | ± 9.6 %                |
| 10069 | CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)           | WLAN      | 10.56    | ± 9.6 %                |
| 10071 | CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)       | WLAN      | 9.83     | ± 9.6 %                |
| 10072 | CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps)      | WLAN      | 9.62     | ± 9.6 %                |
| 10073 | CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)      | WLAN      | 9.94     | ± 9.6 %                |
| 10074 | CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps)      | WLAN      | 10.30    | ± 9.6 %                |
| 10075 | CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps)      | WLAN      | 10.77    | ± 9.6 %                |
| 10076 | CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps)      | WLAN      | 10.94    | ± 9.6 %                |
| 10077 | CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)      | WLAN      | 11.00    | ± 9.6 %                |
| 10081 | CAB | CDMA2000 (1xRTT, RC3)                               | CDMA2000  | 3.97     | ± 9.6 %                |
| 10082 | CAB | IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate) | AMPS      | 4.77     | ± 9.6 %                |
| 10090 | DAC | GPRS-FDD (TDMA, GMSK, TN 0-4)                       | GSM       | 6.56     | ± 9.6 %                |
| 10097 | CAB | UMTS-FDD (HSDPA)                                    | WCDMA     | 3.98     | ± 9.6 %                |
| 10098 | CAB | UMTS-FDD (HSUPA, Subtest 2)                         | WCDMA     | 3.98     | ± 9.6 %                |
| 10099 | DAC | EDGE-FDD (TDMA, 8PSK, TN 0-4)                       | GSM       | 9.55     | ± 9.6 %                |
| 10100 | CAE | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)            | LTE-FDD   | 5.67     | ± 9.6 %                |
| 10101 | CAE | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)          | LTE-FDD   | 6.42     | ± 9.6 %                |
| 10102 | CAE | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)          | LTE-FDD   | 6.60     | ± 9.6 %                |
| 10103 | CAG | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)            | LTE-TDD   | 9.29     | ± 9.6 %                |
| 10104 | CAG | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)          | LTE-TDD   | 9.97     | ± 9.6 %                |
| 10105 | CAG | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)          | LTE-TDD   | 10.01    | ± 9.6 %                |
| 10108 | CAG | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)            | LTE-FDD   | 5.80     | ± 9.6 %                |

|       |     |  |         |       |        |
|-------|-----|--|---------|-------|--------|
| 10109 | CAG | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)     | LTE-FDD | 6.43  | ±9.6 % |
| 10110 | CAG | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)        | LTE-FDD | 5.75  | ±9.6 % |
| 10111 | CAG | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)      | LTE-FDD | 6.44  | ±9.6 % |
| 10112 | CAG | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)     | LTE-FDD | 6.59  | ±9.6 % |
| 10113 | CAG | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)      | LTE-FDD | 6.62  | ±9.6 % |
| 10114 | CAC | IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)  | WLAN    | 8.10  | ±9.6 % |
| 10115 | CAC | IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)  | WLAN    | 8.46  | ±9.6 % |
| 10116 | CAC | IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM) | WLAN    | 8.15  | ±9.6 % |
| 10117 | CAC | IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)       | WLAN    | 8.07  | ±9.6 % |
| 10118 | CAC | IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)       | WLAN    | 8.59  | ±9.6 % |
| 10119 | CAC | IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)      | WLAN    | 8.13  | ±9.6 % |
| 10140 | CAE | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)     | LTE-FDD | 6.49  | ±9.6 % |
| 10141 | CAE | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)     | LTE-FDD | 6.53  | ±9.6 % |
| 10142 | CAE | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)        | LTE-FDD | 5.73  | ±9.6 % |
| 10143 | CAE | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)      | LTE-FDD | 6.35  | ±9.6 % |
| 10144 | CAE | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)      | LTE-FDD | 6.65  | ±9.6 % |
| 10145 | CAF | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)      | LTE-FDD | 5.76  | ±9.6 % |
| 10146 | CAF | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)    | LTE-FDD | 6.41  | ±9.6 % |
| 10147 | CAF | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)    | LTE-FDD | 6.72  | ±9.6 % |
| 10149 | CAE | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)      | LTE-FDD | 6.42  | ±9.6 % |
| 10150 | CAE | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)      | LTE-FDD | 6.60  | ±9.6 % |
| 10151 | CAG | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)        | LTE-TDD | 9.28  | ±9.6 % |
| 10152 | CAG | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)      | LTE-TDD | 9.92  | ±9.6 % |
| 10153 | CAG | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)      | LTE-TDD | 10.05 | ±9.6 % |
| 10154 | CAG | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)        | LTE-FDD | 5.75  | ±9.6 % |
| 10155 | CAG | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)      | LTE-FDD | 6.43  | ±9.6 % |
| 10156 | CAG | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)         | LTE-FDD | 5.79  | ±9.6 % |
| 10157 | CAG | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)       | LTE-FDD | 6.49  | ±9.6 % |
| 10158 | CAG | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)      | LTE-FDD | 6.62  | ±9.6 % |
| 10159 | CAG | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)       | LTE-FDD | 6.56  | ±9.6 % |
| 10160 | CAE | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)        | LTE-FDD | 5.82  | ±9.6 % |
| 10161 | CAE | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)      | LTE-FDD | 6.43  | ±9.6 % |
| 10162 | CAE | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)      | LTE-FDD | 6.58  | ±9.6 % |
| 10166 | CAF | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)       | LTE-FDD | 5.46  | ±9.6 % |
| 10167 | CAF | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)     | LTE-FDD | 6.21  | ±9.6 % |
| 10168 | CAF | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)     | LTE-FDD | 6.79  | ±9.6 % |
| 10169 | CAE | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)          | LTE-FDD | 5.73  | ±9.6 % |
| 10170 | CAE | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)        | LTE-FDD | 6.52  | ±9.6 % |
| 10171 | AAE | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)        | LTE-FDD | 6.49  | ±9.6 % |
| 10172 | CAG | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)          | LTE-TDD | 9.21  | ±9.6 % |
| 10173 | CAG | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)        | LTE-TDD | 9.48  | ±9.6 % |
| 10174 | CAG | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)        | LTE-TDD | 10.25 | ±9.6 % |
| 10175 | CAG | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)          | LTE-FDD | 5.72  | ±9.6 % |
| 10176 | CAG | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)        | LTE-FDD | 6.52  | ±9.6 % |
| 10177 | CAI | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)           | LTE-FDD | 5.73  | ±9.6 % |
| 10178 | CAG | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)         | LTE-FDD | 6.52  | ±9.6 % |
| 10179 | CAG | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)        | LTE-FDD | 6.50  | ±9.6 % |
| 10180 | CAG | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)         | LTE-FDD | 6.50  | ±9.6 % |
| 10181 | CAE | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)          | LTE-FDD | 5.72  | ±9.6 % |
| 10182 | CAE | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)        | LTE-FDD | 6.52  | ±9.6 % |
| 10183 | AAD | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)        | LTE-FDD | 6.50  | ±9.6 % |
| 10184 | CAE | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)           | LTE-FDD | 5.73  | ±9.6 % |
| 10185 | CAE | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)         | LTE-FDD | 6.51  | ±9.6 % |
| 10186 | AAE | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)         | LTE-FDD | 6.50  | ±9.6 % |
| 10187 | CAF | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)         | LTE-FDD | 5.73  | ±9.6 % |
| 10188 | CAF | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)       | LTE-FDD | 6.52  | ±9.6 % |
| 10189 | AAF | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)       | LTE-FDD | 6.50  | ±9.6 % |
| 10193 | CAC | IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)   | WLAN    | 8.09  | ±9.6 % |
| 10194 | CAC | IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)  | WLAN    | 8.12  | ±9.6 % |
| 10195 | CAC | IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)  | WLAN    | 8.21  | ±9.6 % |
| 10196 | CAC | IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)        | WLAN    | 8.10  | ±9.6 % |
| 10197 | CAC | IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)       | WLAN    | 8.13  | ±9.6 % |
| 10198 | CAC | IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)       | WLAN    | 8.27  | ±9.6 % |
| 10219 | CAC | IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)        | WLAN    | 8.03  | ±9.6 % |

|       |     |   |          |       |         |
|-------|-----|---|----------|-------|---------|
| 10220 | CAC | IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)  | WLAN     | 8.13  | ± 9.6 % |
| 10221 | CAC | IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)  | WLAN     | 8.27  | ± 9.6 % |
| 10222 | CAC | IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)      | WLAN     | 8.06  | ± 9.6 % |
| 10223 | CAC | IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)    | WLAN     | 8.48  | ± 9.6 % |
| 10224 | CAC | IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM)   | WLAN     | 8.08  | ± 9.6 % |
| 10225 | CAB | UMTS-FDD (HSPA+)                            | WCDMA    | 5.97  | ± 9.6 % |
| 10226 | CAB | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)    | LTE-TDD  | 9.49  | ± 9.6 % |
| 10227 | CAB | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)    | LTE-TDD  | 10.26 | ± 9.6 % |
| 10228 | CAB | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)      | LTE-TDD  | 9.22  | ± 9.6 % |
| 10229 | CAD | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)      | LTE-TDD  | 9.48  | ± 9.6 % |
| 10230 | CAD | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)      | LTE-TDD  | 10.25 | ± 9.6 % |
| 10231 | CAD | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)        | LTE-TDD  | 9.19  | ± 9.6 % |
| 10232 | CAG | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)      | LTE-TDD  | 9.48  | ± 9.6 % |
| 10233 | CAG | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)      | LTE-TDD  | 10.25 | ± 9.6 % |
| 10234 | CAG | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)        | LTE-TDD  | 9.21  | ± 9.6 % |
| 10235 | CAG | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)     | LTE-TDD  | 9.48  | ± 9.6 % |
| 10236 | CAG | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)     | LTE-TDD  | 10.25 | ± 9.6 % |
| 10237 | CAG | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)       | LTE-TDD  | 9.21  | ± 9.6 % |
| 10238 | CAF | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)     | LTE-TDD  | 9.48  | ± 9.6 % |
| 10239 | CAF | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)     | LTE-TDD  | 10.25 | ± 9.6 % |
| 10240 | CAF | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)       | LTE-TDD  | 9.21  | ± 9.6 % |
| 10241 | CAB | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)  | LTE-TDD  | 9.82  | ± 9.6 % |
| 10242 | CAB | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)  | LTE-TDD  | 9.86  | ± 9.6 % |
| 10243 | CAB | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)    | LTE-TDD  | 9.46  | ± 9.6 % |
| 10244 | CAD | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)    | LTE-TDD  | 10.06 | ± 9.6 % |
| 10245 | CAD | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)    | LTE-TDD  | 10.06 | ± 9.6 % |
| 10246 | CAD | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)      | LTE-TDD  | 9.30  | ± 9.6 % |
| 10247 | CAG | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)    | LTE-TDD  | 9.91  | ± 9.6 % |
| 10248 | CAG | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)    | LTE-TDD  | 10.09 | ± 9.6 % |
| 10249 | CAG | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)      | LTE-TDD  | 9.29  | ± 9.6 % |
| 10250 | CAG | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)   | LTE-TDD  | 9.81  | ± 9.6 % |
| 10251 | CAG | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)   | LTE-TDD  | 10.17 | ± 9.6 % |
| 10252 | CAG | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)     | LTE-TDD  | 9.24  | ± 9.6 % |
| 10253 | CAF | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)   | LTE-TDD  | 9.90  | ± 9.6 % |
| 10254 | CAF | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)   | LTE-TDD  | 10.14 | ± 9.6 % |
| 10255 | CAF | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)     | LTE-TDD  | 9.20  | ± 9.6 % |
| 10256 | CAB | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM) | LTE-TDD  | 9.96  | ± 9.6 % |
| 10257 | CAB | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM) | LTE-TDD  | 10.08 | ± 9.6 % |
| 10258 | CAB | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)   | LTE-TDD  | 9.34  | ± 9.6 % |
| 10259 | CAD | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)   | LTE-TDD  | 9.98  | ± 9.6 % |
| 10260 | CAD | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)   | LTE-TDD  | 9.97  | ± 9.6 % |
| 10261 | CAD | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)     | LTE-TDD  | 9.24  | ± 9.6 % |
| 10262 | CAG | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)   | LTE-TDD  | 9.83  | ± 9.6 % |
| 10263 | CAG | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)   | LTE-TDD  | 10.16 | ± 9.6 % |
| 10264 | CAG | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)     | LTE-TDD  | 9.23  | ± 9.6 % |
| 10265 | CAG | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)  | LTE-TDD  | 9.92  | ± 9.6 % |
| 10266 | CAG | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)  | LTE-TDD  | 10.07 | ± 9.6 % |
| 10267 | CAG | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)    | LTE-TDD  | 9.30  | ± 9.6 % |
| 10268 | CAF | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)  | LTE-TDD  | 10.06 | ± 9.6 % |
| 10269 | CAF | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)  | LTE-TDD  | 10.13 | ± 9.6 % |
| 10270 | CAF | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)    | LTE-TDD  | 9.58  | ± 9.6 % |
| 10274 | CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)   | WCDMA    | 4.87  | ± 9.6 % |
| 10275 | CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)    | WCDMA    | 3.96  | ± 9.6 % |
| 10277 | CAA | PHS (QPSK)                                  | PHS      | 11.81 | ± 9.6 % |
| 10278 | CAA | PHS (QPSK, BW 884MHz, Rolloff 0.5)          | PHS      | 11.81 | ± 9.6 % |
| 10279 | CAA | PHS (QPSK, BW 884MHz, Rolloff 0.38)         | PHS      | 12.18 | ± 9.6 % |
| 10290 | AAB | CDMA2000, RC1, SO55, Full Rate              | CDMA2000 | 3.91  | ± 9.6 % |
| 10291 | AAB | CDMA2000, RC3, SO55, Full Rate              | CDMA2000 | 3.46  | ± 9.6 % |
| 10292 | AAB | CDMA2000, RC3, SO32, Full Rate              | CDMA2000 | 3.39  | ± 9.6 % |
| 10293 | AAB | CDMA2000, RC3, SO3, Full Rate               | CDMA2000 | 3.50  | ± 9.6 % |
| 10295 | AAB | CDMA2000, RC1, SO3, 1/8th Rate 25 fr.       | CDMA2000 | 12.49 | ± 9.6 % |
| 10297 | AAD | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)     | LTE-FDD  | 5.81  | ± 9.6 % |
| 10298 | AAD | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)      | LTE-FDD  | 5.72  | ± 9.6 % |
| 10299 | AAD | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)    | LTE-FDD  | 6.39  | ± 9.6 % |

|       |     |   |          |       |         |
|-------|-----|---|----------|-------|---------|
| 10300 | AAD | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)  | LTE-FDD  | 6.60  | ± 9.6 % |
| 10301 | AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC)                              | WiMAX    | 12.03 | ± 9.6 % |
| 10302 | AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3 CTRL symbols)              | WiMAX    | 12.57 | ± 9.6 % |
| 10303 | AAA | IEEE 802.16e WiMAX (31:15, 5ms, 10MHz, 64QAM, PUSC)                             | WiMAX    | 12.52 | ± 9.6 % |
| 10304 | AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, 64QAM, PUSC)                             | WiMAX    | 11.86 | ± 9.6 % |
| 10305 | AAA | IEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC, 15 symbols)                | WiMAX    | 15.24 | ± 9.6 % |
| 10306 | AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC, 18 symbols)                | WiMAX    | 14.67 | ± 9.6 % |
| 10307 | AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, PUSC, 18 symbols)                 | WiMAX    | 14.49 | ± 9.6 % |
| 10308 | AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, PUSC)                            | WiMAX    | 14.46 | ± 9.6 % |
| 10309 | AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3, 18 symbols)             | WiMAX    | 14.58 | ± 9.6 % |
| 10310 | AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3, 18 symbols)              | WiMAX    | 14.57 | ± 9.6 % |
| 10311 | AAD | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)  | LTE-FDD  | 6.06  | ± 9.6 % |
| 10313 | AAA | iDEN 1:3  | iDEN     | 10.51 | ± 9.6 % |
| 10314 | AAA | iDEN 1:6  | iDEN     | 13.48 | ± 9.6 % |
| 10315 | AAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)                       | WLAN     | 1.71  | ± 9.6 % |
| 10316 | AAB | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle)                   | WLAN     | 8.36  | ± 9.6 % |
| 10317 | AAC | IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)                         | WLAN     | 8.36  | ± 9.6 % |
| 10352 | AAA | Pulse Waveform (200Hz, 10%)   | Generic  | 10.00 | ± 9.6 % |
| 10353 | AAA | Pulse Waveform (200Hz, 20%)   | Generic  | 6.99  | ± 9.6 % |
| 10354 | AAA | Pulse Waveform (200Hz, 40%)   | Generic  | 3.98  | ± 9.6 % |
| 10355 | AAA | Pulse Waveform (200Hz, 60%)   | Generic  | 2.22  | ± 9.6 % |
| 10356 | AAA | Pulse Waveform (200Hz, 80%)   | Generic  | 0.97  | ± 9.6 % |
| 10387 | AAA | QPSK Waveform, 1 MHz  | Generic  | 5.10  | ± 9.6 % |
| 10388 | AAA | QPSK Waveform, 10 MHz   | Generic  | 5.22  | ± 9.6 % |
| 10396 | AAA | 64-QAM Waveform, 100 kHz  | Generic  | 6.27  | ± 9.6 % |
| 10399 | AAA | 64-QAM Waveform, 40 MHz   | Generic  | 6.27  | ± 9.6 % |
| 10400 | AAD | IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle)                             | WLAN     | 8.37  | ± 9.6 % |
| 10401 | AAD | IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle)                             | WLAN     | 8.60  | ± 9.6 % |
| 10402 | AAD | IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle)                             | WLAN     | 8.53  | ± 9.6 % |
| 10403 | AAB | CDMA2000 (1xEV-DO, Rev. 0)  | CDMA2000 | 3.76  | ± 9.6 % |
| 10404 | AAB | CDMA2000 (1xEV-DO, Rev. A)  | CDMA2000 | 3.77  | ± 9.6 % |
| 10406 | AAB | CDMA2000, RC3, SO32, SCH0, Full Rate  | CDMA2000 | 5.22  | ± 9.6 % |
| 10410 | AAG | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9, Subframe Conf=4) | LTE-TDD  | 7.82  | ± 9.6 % |
| 10414 | AAA | WLAN CCDF, 64-QAM, 40MHz  | Generic  | 8.54  | ± 9.6 % |
| 10415 | AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)                       | WLAN     | 1.54  | ± 9.6 % |
| 10416 | AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle)                   | WLAN     | 8.23  | ± 9.6 % |
| 10417 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)                       | WLAN     | 8.23  | ± 9.6 % |
| 10418 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preamble)   | WLAN     | 8.14  | ± 9.6 % |
| 10419 | AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preamble)  | WLAN     | 8.19  | ± 9.6 % |
| 10422 | AAB | IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)                                    | WLAN     | 8.32  | ± 9.6 % |
| 10423 | AAB | IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)                                 | WLAN     | 8.47  | ± 9.6 % |
| 10424 | AAB | IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)                                 | WLAN     | 8.40  | ± 9.6 % |
| 10425 | AAB | IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)                                     | WLAN     | 8.41  | ± 9.6 % |
| 10426 | AAB | IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)                                   | WLAN     | 8.45  | ± 9.6 % |
| 10427 | AAB | IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)                                  | WLAN     | 8.41  | ± 9.6 % |
| 10430 | AAD | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)  | LTE-FDD  | 8.28  | ± 9.6 % |
| 10431 | AAD | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)   | LTE-FDD  | 8.38  | ± 9.6 % |
| 10432 | AAC | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)   | LTE-FDD  | 8.34  | ± 9.6 % |
| 10433 | AAC | LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)   | LTE-FDD  | 8.34  | ± 9.6 % |
| 10434 | AAA | W-CDMA (BS Test Model 1, 64 DPCH)   | WCDMA    | 8.60  | ± 9.6 % |
| 10435 | AAF | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)                  | LTE-TDD  | 7.82  | ± 9.6 % |
| 10447 | AAD | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)                                  | LTE-FDD  | 7.56  | ± 9.6 % |
| 10448 | AAD | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)                                 | LTE-FDD  | 7.53  | ± 9.6 % |
| 10449 | AAC | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)                                 | LTE-FDD  | 7.51  | ± 9.6 % |
| 10450 | AAC | LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)                                 | LTE-FDD  | 7.48  | ± 9.6 % |

|       |     |  |          |       |         |
|-------|-----|--|----------|-------|---------|
| 10451 | AAA | W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)                        | WCDMA    | 7.59  | ± 9.6 % |
| 10453 | AAD | Validation (Square, 10ms, 1ms)   | Test     | 10.00 | ± 9.6 % |
| 10456 | AAB | IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc duty cycle)                   | WLAN     | 8.63  | ± 9.6 % |
| 10457 | AAA | UMTS-FDD (DC-HSDPA)  | WCDMA    | 6.62  | ± 9.6 % |
| 10458 | AAA | CDMA2000 (1xEV-DO, Rev. B, 2 carriers)                                 | CDMA2000 | 6.55  | ± 9.6 % |
| 10459 | AAA | CDMA2000 (1xEV-DO, Rev. B, 3 carriers)                                 | CDMA2000 | 8.25  | ± 9.6 % |
| 10460 | AAA | UMTS-FDD (WCDMA, AMR)  | WCDMA    | 2.39  | ± 9.6 % |
| 10461 | AAB | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL<br>Subframe=2,3,4,7,8,9)     | LTE-TDD  | 7.82  | ± 9.6 % |
| 10462 | AAB | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL<br>Subframe=2,3,4,7,8,9)   | LTE-TDD  | 8.30  | ± 9.6 % |
| 10463 | AAB | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL<br>Subframe=2,3,4,7,8,9)   | LTE-TDD  | 8.56  | ± 9.6 % |
| 10464 | AAC | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL<br>Subframe=2,3,4,7,8,9)       | LTE-TDD  | 7.82  | ± 9.6 % |
| 10465 | AAC | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL<br>Subframe=2,3,4,7,8,9)     | LTE-TDD  | 8.32  | ± 9.6 % |
| 10466 | AAC | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL<br>Subframe=2,3,4,7,8,9)     | LTE-TDD  | 8.57  | ± 9.6 % |
| 10467 | AAF | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL<br>Subframe=2,3,4,7,8,9)       | LTE-TDD  | 7.82  | ± 9.6 % |
| 10468 | AAF | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL<br>Subframe=2,3,4,7,8,9)     | LTE-TDD  | 8.32  | ± 9.6 % |
| 10469 | AAF | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL<br>Subframe=2,3,4,7,8,9)     | LTE-TDD  | 8.56  | ± 9.6 % |
| 10470 | AAF | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL<br>Subframe=2,3,4,7,8,9)      | LTE-TDD  | 7.82  | ± 9.6 % |
| 10471 | AAF | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL<br>Subframe=2,3,4,7,8,9)    | LTE-TDD  | 8.32  | ± 9.6 % |
| 10472 | AAF | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL<br>Subframe=2,3,4,7,8,9)    | LTE-TDD  | 8.57  | ± 9.6 % |
| 10473 | AAE | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL<br>Subframe=2,3,4,7,8,9)      | LTE-TDD  | 7.82  | ± 9.6 % |
| 10474 | AAE | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL<br>Subframe=2,3,4,7,8,9)    | LTE-TDD  | 8.32  | ± 9.6 % |
| 10475 | AAE | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL<br>Subframe=2,3,4,7,8,9)    | LTE-TDD  | 8.57  | ± 9.6 % |
| 10477 | AAF | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL<br>Subframe=2,3,4,7,8,9)    | LTE-TDD  | 8.32  | ± 9.6 % |
| 10478 | AAF | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL<br>Subframe=2,3,4,7,8,9)    | LTE-TDD  | 8.57  | ± 9.6 % |
| 10479 | AAB | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL<br>Subframe=2,3,4,7,8,9)   | LTE-TDD  | 7.74  | ± 9.6 % |
| 10480 | AAB | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL<br>Subframe=2,3,4,7,8,9) | LTE-TDD  | 8.18  | ± 9.6 % |
| 10481 | AAB | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL<br>Subframe=2,3,4,7,8,9) | LTE-TDD  | 8.45  | ± 9.6 % |
| 10482 | AAC | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL<br>Subframe=2,3,4,7,8,9)     | LTE-TDD  | 7.71  | ± 9.6 % |
| 10483 | AAC | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL<br>Subframe=2,3,4,7,8,9)   | LTE-TDD  | 8.39  | ± 9.6 % |
| 10484 | AAC | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL<br>Subframe=2,3,4,7,8,9)   | LTE-TDD  | 8.47  | ± 9.6 % |
| 10485 | AAF | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL<br>Subframe=2,3,4,7,8,9)     | LTE-TDD  | 7.59  | ± 9.6 % |
| 10486 | AAF | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL<br>Subframe=2,3,4,7,8,9)   | LTE-TDD  | 8.38  | ± 9.6 % |
| 10487 | AAF | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL<br>Subframe=2,3,4,7,8,9)   | LTE-TDD  | 8.60  | ± 9.6 % |
| 10488 | AAF | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL<br>Subframe=2,3,4,7,8,9)    | LTE-TDD  | 7.70  | ± 9.6 % |
| 10489 | AAF | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL<br>Subframe=2,3,4,7,8,9)  | LTE-TDD  | 8.31  | ± 9.6 % |
| 10490 | AAF | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL<br>Subframe=2,3,4,7,8,9)  | LTE-TDD  | 8.54  | ± 9.6 % |

|       |     |  |         |      |         |
|-------|-----|--|---------|------|---------|
| 10491 | AAE | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | LTE-TDD | 7.74 | ± 9.6 % |
| 10492 | AAE | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | LTE-TDD | 8.41 | ± 9.6 % |
| 10493 | AAE | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | LTE-TDD | 8.55 | ± 9.6 % |
| 10494 | AAF | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | LTE-TDD | 7.74 | ± 9.6 % |
| 10495 | AAF | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | LTE-TDD | 8.37 | ± 9.6 % |
| 10496 | AAF | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | LTE-TDD | 8.54 | ± 9.6 % |
| 10497 | AAB | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)   | LTE-TDD | 7.67 | ± 9.6 % |
| 10498 | AAB | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.40 | ± 9.6 % |
| 10499 | AAB | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | LTE-TDD | 8.68 | ± 9.6 % |
| 10500 | AAC | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | LTE-TDD | 7.67 | ± 9.6 % |
| 10501 | AAC | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | LTE-TDD | 8.44 | ± 9.6 % |
| 10502 | AAC | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | LTE-TDD | 8.52 | ± 9.6 % |
| 10503 | AAF | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | LTE-TDD | 7.72 | ± 9.6 % |
| 10504 | AAF | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | LTE-TDD | 8.31 | ± 9.6 % |
| 10505 | AAF | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | LTE-TDD | 8.54 | ± 9.6 % |
| 10506 | AAF | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)    | LTE-TDD | 7.74 | ± 9.6 % |
| 10507 | AAF | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)  | LTE-TDD | 8.36 | ± 9.6 % |
| 10508 | AAF | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)  | LTE-TDD | 8.55 | ± 9.6 % |
| 10509 | AAE | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)    | LTE-TDD | 7.99 | ± 9.6 % |
| 10510 | AAE | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)  | LTE-TDD | 8.49 | ± 9.6 % |
| 10511 | AAE | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)  | LTE-TDD | 8.51 | ± 9.6 % |
| 10512 | AAF | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)    | LTE-TDD | 7.74 | ± 9.6 % |
| 10513 | AAF | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)  | LTE-TDD | 8.42 | ± 9.6 % |
| 10514 | AAF | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)  | LTE-TDD | 8.45 | ± 9.6 % |
| 10515 | AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle)            | WLAN    | 1.58 | ± 9.6 % |
| 10516 | AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle)          | WLAN    | 1.57 | ± 9.6 % |
| 10517 | AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle)           | WLAN    | 1.58 | ± 9.6 % |
| 10518 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle)            | WLAN    | 8.23 | ± 9.6 % |
| 10519 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle)           | WLAN    | 8.39 | ± 9.6 % |
| 10520 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle)           | WLAN    | 8.12 | ± 9.6 % |
| 10521 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle)           | WLAN    | 7.97 | ± 9.6 % |
| 10522 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle)           | WLAN    | 8.45 | ± 9.6 % |
| 10523 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle)           | WLAN    | 8.08 | ± 9.6 % |
| 10524 | AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle)           | WLAN    | 8.27 | ± 9.6 % |
| 10525 | AAB | IEEE 802.11ac WiFi (20MHz, MCS0, 99pc duty cycle)                    | WLAN    | 8.36 | ± 9.6 % |
| 10526 | AAB | IEEE 802.11ac WiFi (20MHz, MCS1, 99pc duty cycle)                    | WLAN    | 8.42 | ± 9.6 % |
| 10527 | AAB | IEEE 802.11ac WiFi (20MHz, MCS2, 99pc duty cycle)                    | WLAN    | 8.21 | ± 9.6 % |
| 10528 | AAB | IEEE 802.11ac WiFi (20MHz, MCS3, 99pc duty cycle)                    | WLAN    | 8.36 | ± 9.6 % |
| 10529 | AAB | IEEE 802.11ac WiFi (20MHz, MCS4, 99pc duty cycle)                    | WLAN    | 8.36 | ± 9.6 % |
| 10531 | AAB | IEEE 802.11ac WiFi (20MHz, MCS6, 99pc duty cycle)                    | WLAN    | 8.43 | ± 9.6 % |
| 10532 | AAB | IEEE 802.11ac WiFi (20MHz, MCS7, 99pc duty cycle)                    | WLAN    | 8.29 | ± 9.6 % |
| 10533 | AAB | IEEE 802.11ac WiFi (20MHz, MCS8, 99pc duty cycle)                    | WLAN    | 8.38 | ± 9.6 % |