

On your side

**HCT**

# TEST REPORT

EMI Test for FCC Certification of LM-F100VM Model

APPLICANT

LG Electronics USA, Inc.

REPORT NO.

HCT-EM-2008-FC018

DATE OF ISSUE

August 26, 2020

Tested by  
Ki-Min Lee

(signature)

Technical Manager  
Kyoung-Hee Yoon

(signature)

HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA

Tel. +82 31 645 6300 Fax. +82 31 645 6401



HCT Co., Ltd.

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA

Tel. +82 31 645 6300 Fax. +82 31 645 6401

# TEST REPORT

EMI Test for  
FCC Certification

## REPORT NO.

HCT-EM-2008-FC018

## DATE OF ISSUE

August 26, 2020

## FCC ID.

ZNFF100VM

### Applicant

**LG Electronics USA, Inc.**

111 Sylvan Avenue, North Building , Englewood Cliffs NJ 07632 United States

### Product Name

Multi-band CDMA/GSM/EDGE/WCDMA/LTE/5G NR Phone with WLAN, BT and RFID

### Model Name

LM-F100VM

### Series Model Name

Refer to the clause 1.1 Description of EUT

### Travel Adaptor Information

Model name: MCS-P02WR

Manufacturer: SUNLIN

### Date of Test

August 06, 2020 to August 24, 2020

### Test Standard Used

FCC CFR 47 PART 15 Subpart B Class B

ANSI C63.4-2014

### Test Results

Refer to the present document

### Manufacturer

LG Electronics Inc.

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test results were applied only to the test methods required by the standard

## REVISION HISTORY

The revision history for this test report is shown in table.

| Revision No. | Date of Issue   | Description     |
|--------------|-----------------|-----------------|
| 0            | August 26, 2020 | Initial Release |

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2014. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862

The above Test Report is not related to the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme) / A2LA(American Association for Laboratory Accreditation), which signed the ILAC-MRA.

\* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

## CONTENTS

|                                                          |    |
|----------------------------------------------------------|----|
| 1. GENERAL INFORMATION                                   | 5  |
| 1.1 Description of EUT                                   | 5  |
| 1.2 Tested System Details                                | 5  |
| 1.3 Cable Description                                    | 8  |
| 1.4 Noise Suppression Parts on Cable. (I/O Cable)        | 8  |
| 1.5 Test Facility                                        | 9  |
| 1.6 Calibration of Measuring Instrument                  | 9  |
| 1.7 Measurement Uncertainty                              | 9  |
| 2. DESCRIPTION OF TEST                                   | 10 |
| 2.1 Measurement of Conducted Emission                    | 10 |
| 2.2 Measurement of Radiated Emission                     | 11 |
| 2.3 Configuration of Tested System                       | 13 |
| 3. PRELIMINARY TEST                                      | 14 |
| 3.1 Conducted Emission                                   | 14 |
| 3.2 Radiated Emission                                    | 14 |
| 4. CONDUCTED EMISSION AND RADIATED EMISSION TEST SUMMARY | 15 |
| 4.1 Conducted Emission                                   | 15 |
| 4.2 Radiated Emission Below 1 GHz                        | 29 |
| 4.3 Radiated Emission Above 1 GHz                        | 33 |
| 5. CONCLUSION                                            | 36 |
| 6. APPENDIX A. TEST SETUP PHOTO                          | 39 |

## 1. GENERAL INFORMATION

### 1.1 Description of EUT

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>FCC ID</b>            | ZNFF100VM                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Model Name</b>        | LM-F100VM                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Series Model Name</b> | LMF100VM, F100VM, LM-F101V, LMF101V, F101V                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Product Name</b>      | Multi-band CDMA/GSM/EDGE/WCDMA/LTE/5G NR Phone with WLAN, BT and RFID                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>TX Frequency</b>      | 824.70 MHz to 848.31 MHz (CDMA BC0)<br>1 851.25 MHz to 1 908.75 MHz (CDMA BC1)<br>824.20 MHz to 848.80 MHz (GSM 850)<br>1 850.20 MHz to 1 909.80 MHz (GSM 1 900)<br>1 852.4 MHz to 1 907.6 MHz (WCDMA B2)<br>1712.4 MHz to 1752.6 MHz (WCDMA B4)<br>826.40 MHz to 846.60 MHz (WCDMA B5)<br>1 850 MHz to 1 910 MHz (LTE B2)<br>1 710 MHz to 1 755 MHz (LTE B4)<br>824 MHz to 849 MHz (LTE B5)<br>699 MHz to 716 MHz (LTE B12)<br>777 MHz to 787 MHz (LTE B13)<br>788 MHz to 798 MHz (LTE B14)<br>2 305 MHz to 2 315 MHz (LTE B30)<br>2 496 MHz to 2 690 MHz (LTE B41)<br>3 550 MHz to 3 700 MHz (LTE B48)<br>1 710 MHz to 1 780 MHz (LTE B66)<br>2 402 MHz to 2 480 MHz ( Bluetooth)<br>2 412 MHz to 2 462 MHz ( WiFi 2.4 GHz)<br>5 180 MHz to 5 240 MHz (WiFi 5 GHz_UNII 1)<br>5 260 MHz to 5 320 MHz (WiFi 5 GHz_UNII 2A)<br>5 500 MHz to 5 720 MHz (WiFi 5 GHz_UNII 2C)<br>5 745 MHz to 5 825 MHz (WiFi 5 GHz_UNII 3)<br>13.56 MHz (NFC)<br>1 850 MHz to 1 910 MHz (5G NR n2)<br>824 MHz to 849 MHz (5G NR n5)<br>1 710 MHz to 1 780 MHz (5G NR n66)<br>37 000 MHz to 40 000 MHz (5G NR n260)<br>27 500 MHz to 28 350 MHz (5G NR n261) |

|              |                                             |
|--------------|---------------------------------------------|
| RX Frequency | 869.70 MHz to 893.31 MHz (CDMA BC0)         |
|              | 1 931.25 MHz to 1 988.75 MHz (CDMA BC1)     |
|              | 862.00 MHz to 894.00 MHz (CDMA BC10)        |
|              | 869.20 MHz to 893.80 MHz (GSM 850)          |
|              | 1 930.20 MHz to 1 989.80 MHz (GSM 1 900)    |
|              | 1 932.4 MHz to 1 987.6 MHz (WCDMA B2)       |
|              | 2 112.4 MHz to 2 152.6 MHz (WCDMA B4)       |
|              | 871.40 MHz to 891.60 MHz (WCDMA B5)         |
|              | 1 930 MHz to 1 990 MHz (LTE B2)             |
|              | 2 110 MHz to 2 155 MHz (LTE B4)             |
|              | 869 MHz to 894 MHz (LTE B5)                 |
|              | 729 MHz to 746 MHz (LTE B12)                |
|              | 746 MHz to 756 MHz (LTE B13)                |
|              | 758 MHz to 768 MHz (LTE B14)                |
|              | 717 MHz to 728 MHz (LTE B29)                |
|              | 2 350 MHz to 2 360 MHz (LTE B30)            |
|              | 2 496 MHz to 2 690 MHz (LTE B41)            |
|              | 5 150 MHz to 5 925 MHz (LTE B46)            |
|              | 3 550 MHz to 3 700 MHz (LTE B48)            |
|              | 2 110 MHz to 2 200 MHz (LTE B66)            |
|              | 2 402 MHz to 2 480 MHz ( Bluetooth)         |
|              | 2 412 MHz to 2 462 MHz ( WiFi 2.4 GHz)      |
|              | 5 180 MHz to 5 240 MHz (WiFi 5 GHz_UNII 1)  |
|              | 5 260 MHz to 5 320 MHz (WiFi 5 GHz_UNII 2A) |
|              | 5 500 MHz to 5 720 MHz (WiFi 5 GHz_UNII 2C) |
|              | 5 745 MHz to 5 825 MHz (WiFi 5 GHz_UNII 3)  |
|              | 13.56 MHz (NFC)                             |
|              | 1 930 MHz to 1 990 MHz (5G NR n2)           |
|              | 869 MHz to 894 MHz (5G NR n5)               |
|              | 2 110 MHz to 2 200 MHz (5G NR n66)          |
|              | 37 000 MHz to 40 000 MHz (5G NR n260)       |
|              | 27 500 MHz to 28 350 MHz (5G NR n261)       |

## 1.2 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

| Device Type         | Model Name                                    | Serial Number | Manufacturer              |
|---------------------|-----------------------------------------------|---------------|---------------------------|
| EUT                 | LM-F100VM                                     | -             | LG                        |
| LED monitor         | 34UC98                                        | -             | LG                        |
| Monitor adapter     | ADS-110CL-19-3                                | -             | SHENZHEN HONOR ELECTRONIC |
| DP cable            | CDP2DPMM1MW                                   | -             | STARTECH                  |
| Wireless charger    | F7U082                                        | -             | belkin                    |
| Micro USB cable     | -                                             | -             | belkin                    |
| Wireless charger TA | DSA-18QFB                                     | -             | belkin                    |
| DATA cable          | EAD65830101                                   | -             | LUXSHARE                  |
| Earphone            | EAB63728251                                   | -             | CRESYN                    |
| Audio gender        | EBX64331001                                   | -             | CRESYN                    |
| TA                  | MCS-P02WR                                     | -             | SUNLIN                    |
| Micro SD card       | SAMSUNG EVO+ microSDXC CLASS10 UHS-I (256 GB) | -             | SAMSUNG                   |

### 1.3 Cable Description

| Product Name     | Port                       | Power Cord Shielded (Y/N) | I/O Cable Shielded (Y/N) | Length (m) |
|------------------|----------------------------|---------------------------|--------------------------|------------|
| EUT              | USB Type C (Data Cable)    | Y                         | N/A                      | (P) 1.0    |
|                  | USB Type C (Display Cable) | N/A                       | Y                        | (D) 1.0    |
|                  | USB Type C (Audio Gender)  | N/A                       | N                        | (D) 0.1    |
| Audio Gender     | Earphone                   | N/A                       | N                        | (D) 1.2    |
| LED Monitor      | DC IN                      | N                         | N/A                      | (P) 1.8    |
|                  | DP port                    | N/A                       | Y                        | (D) 1.2    |
| Wireless Charger | Micro USB                  | Y                         | N/A                      | (P) 1.3    |

NOTE. The marked "(D)" means the data cable and "(P)" means the power cable.

### 1.4 Noise Suppression Parts on Cable (I/O Cable)

| Product Name     | Port                       | Ferrite Bead (Y/N) | Location | Metal Hood (Y/N) | Location         |
|------------------|----------------------------|--------------------|----------|------------------|------------------|
| EUT              | USB Type C (Data Cable)    | N                  | N/A      | Y                | Both End         |
|                  | USB Type C (Display Cable) | N                  | N/A      | Y                | Both End         |
|                  | USB Type C (Audio Gender)  | N                  | N/A      | Y                | EUT End          |
| Audio Gender     | Earphone                   | N                  | N/A      | Y                | Audio Gender End |
| LED Monitor      | DP port                    | N                  | N/A      | Y                | Both End         |
| Wireless Charger | Micro USB                  | N                  | N/A      | Y                | Both End         |

## 1.5 Test Facility

Test site is located at 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, South Korea. Those measurement facilities are constructed in conformance with the requirements of ANSI C63.4-2014. The Normalized site attenuations (30 MHz to 1 GHz) and Site validation (1 GHz to 18 GHz) were performed in accordance with the standard in ANSI C63.4-2014

| Measurement Facilities                                                        | Designation No. |
|-------------------------------------------------------------------------------|-----------------|
| Radiated Field strength measurement facility<br>3 m Semi Anechoic chamber     | KR0032          |
| Radiated Field strength measurement facility<br>10 m Semi Anechoic chamber #1 |                 |
| Radiated Field strength measurement facility<br>10 m Semi Anechoic chamber #2 |                 |

## 1.6 Calibration of Measuring Instrument

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturers recommendations for utilizing calibration equipment, which is traceable to recognized national standards. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5:2017

## 1.7 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Parameter                                 | Expanded Uncertainty |
|-------------------------------------------|----------------------|
| Conducted Emission (0.15 MHz to 30 MHz)   | 1.58 dB              |
| 3 m Radiated Emissions (30 MHz to 1 GHz)  | 4.86 dB              |
| 3 m Radiated Emissions (1 GHz to 18 GHz)  | 4.58 dB              |
| 3 m Radiated Emissions (18 GHz to 40 GHz) | 5.54 dB              |

## 2. DESCRIPTION OF TEST

### 2.1 Measurement of Conducted Emission

The test procedure was in accordance with ANSI C63.4-2014, Clause 7.3

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN).  
If the EUT is connected to the PC through USB, the AC power-line adapter of the PC is directly connected to a line impedance stabilization network (LISN).  
Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both conducted lines are measured in Quasi-Peak and Average mode, including the worst-case data points for each tested configuration.
- c. The frequency range from 150 kHz to 30 MHz was searched.

#### Conducted Emission Limits

| Frequency<br>(MHz) | Resolution<br>Bandwidth<br>(kHz) | Class A              |                   | Class B              |                   |
|--------------------|----------------------------------|----------------------|-------------------|----------------------|-------------------|
|                    |                                  | Quasi-Peak<br>(dBμV) | Average<br>(dBμV) | Quasi-Peak<br>(dBμV) | Average<br>(dBμV) |
| 0.15 to 0.5        | 9                                | 79                   | 66                | 66 to 56*            | 56 to 46*         |
| 0.5 to 5           | 9                                | 73                   | 60                | 56                   | 46                |
| 5 to 30            | 9                                | 73                   | 60                | 60                   | 50                |

NOTE. Decreases with the logarithm of the frequency.

## 2.2 Measurement of Radiated Emission

The test procedure was in accordance with ANSI C63.4-2014, Clause 8.3

- The EUT was placed on the top of a turn table 0.8 meters above the ground at a semi-anechoic chamber.  
The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 m away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from 1 m to 4 m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 m to 4 m and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- The test-receiver system was set to Peak and Average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.  
(1 GHz to 40 GHz)

### Radiated Emission Limits


| Frequency<br>(MHz) | Class A                    |                             |                        | Class B                    |                             |                        |
|--------------------|----------------------------|-----------------------------|------------------------|----------------------------|-----------------------------|------------------------|
|                    | Antenna<br>Distance<br>(m) | Field<br>Strength<br>(μV/m) | Quasi-Peak<br>(dBμV/m) | Antenna<br>Distance<br>(m) | Field<br>Strength<br>(μV/m) | Quasi-Peak<br>(dBμV/m) |
| 30 to 88           | 10                         | 90                          | 39.0                   | 3                          | 100                         | 40.0                   |
| 88 to 216          | 10                         | 150                         | 43.5                   | 3                          | 150                         | 43.5                   |
| 216 to 960         | 10                         | 210                         | 46.4                   | 3                          | 200                         | 46.0                   |
| Above 960          | 10                         | 300                         | 49.5                   | 3                          | 500                         | 54.0                   |
| Frequency<br>(MHz) | Antenna Distance<br>(m)    | Class A                     |                        | Class B                    |                             |                        |
|                    |                            | Peak<br>(dBμV/m)            | Average<br>(dBμV/m)    | Peak<br>(dBμV/m)           | Average<br>(dBμV/m)         |                        |
| Above 1 000        | 3                          | 80                          | 60                     | 74                         | 54                          |                        |

## 2.2.1 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table

| Highest frequency generated or used in the device<br>or on which the device operates<br>or tunes (MHz) | Upper frequency of measurement range<br>(MHz)                          |
|--------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------|
| Below 1.705                                                                                            | 30                                                                     |
| 1.705 to 108                                                                                           | 1 000                                                                  |
| 108 to 500                                                                                             | 2 000                                                                  |
| 500 to 1 000                                                                                           | 5 000                                                                  |
| Above 1 000                                                                                            | 5th harmonic of the highest frequency<br>or 40 GHz, whichever is lower |

### 2.3 Configuration of Tested System

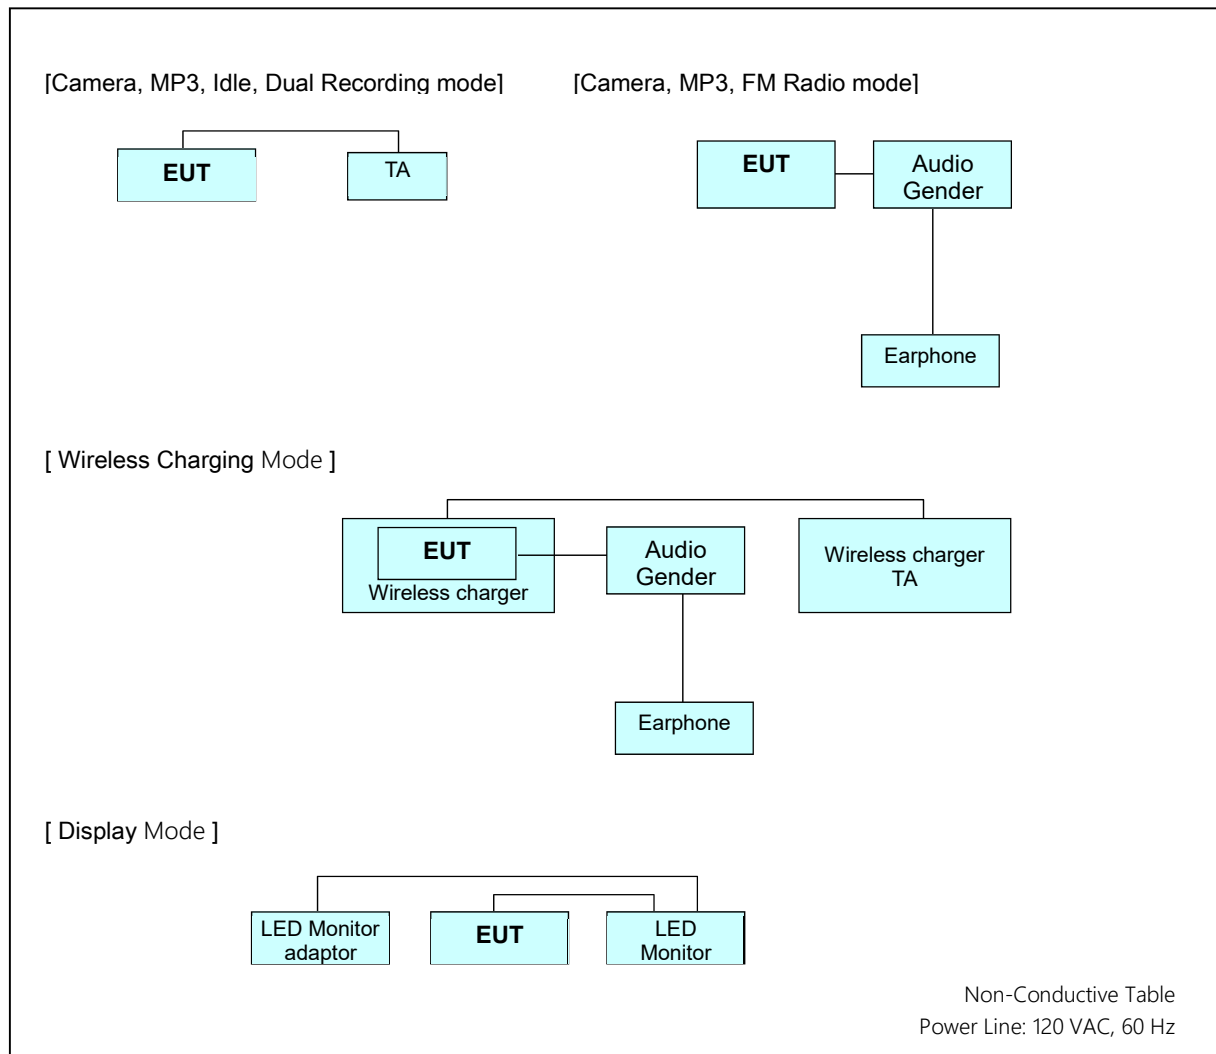

### 3. PRELIMINARY TEST

#### 3.1 Conducted Emission

It was tested the following operating mode, after connecting all peripheral devices.

**Operating Modes:**

**[EUT +TA]**

FRONT CAMERA & MP3 mode

REAR CAMERA mode

IDLE mode

Dual Recording mode

NOTE. The worst-case emissions are reported.

#### 3.2 Radiated Emission

It was tested the following operating mode, after connecting all peripheral devices.

**Operating Modes:**

**[EUT +TA]**

FRONT CAMERA & MP3 mode

REAR CAMERA mode

IDLE mode

Dual Recording mode

Display mode

**[EUT +Earphone]**

FRONT CAMERA & MP3 mode

REAR CAMERA & FM RADIO mode

WIRELESS CHARGING mode

NOTE. The worst-case emissions are reported.

#### 4. CONDUCTED EMISSION AND RADIATED EMISSION TEST SUMMARY

##### 4.1 Conducted Emission

##### 4.1.1 Measuring instruments

|                                     | Type                           | Manufacturer    | Model Name | Serial Number | Calibration Cycle | Calibration Date |
|-------------------------------------|--------------------------------|-----------------|------------|---------------|-------------------|------------------|
| <input checked="" type="checkbox"/> | EMI test receiver              | Rohde & Schwarz | ESCI       | 100584        | 1 year            | 06.10.2020       |
| <input checked="" type="checkbox"/> | LISN                           | Rohde & Schwarz | ENV216     | 102245        | 1 year            | 09.11.2019       |
| <input checked="" type="checkbox"/> | Radio communication analyzer   | ANRITSU         | MT8820C    | 6201138643    | 1 year            | 08.20.2019       |
| <input checked="" type="checkbox"/> | Antenna<br>(for Communication) | Schwarzbeck     | USLP9142   | VSLP 9142-200 | -                 | -                |
| <input checked="" type="checkbox"/> | UXM 5G Wireless Test Platform  | KEYSIGHT        | E7515B     | MY58300756    | 1 year            | 01.07.2020       |
| <input checked="" type="checkbox"/> | ANTENNA (for Communication)    | Schwarzbeck     | USLP9142   | VSLP 9142-201 | -                 | -                |
| <input checked="" type="checkbox"/> | Software                       | Rohde & Schwarz | EMC32      | -             | -                 | -                |


#### 4.1.2 Operating Condition

The test results of conducted emission at mains ports provide the following information:

|                              |                                                         |
|------------------------------|---------------------------------------------------------|
| Test Standard Used           | FCC CFR 47 PART 15 Subpart B Class B<br>ANSI C63.4-2014 |
| Frequency Range              | 150 kHz to 30 MHz                                       |
| Detector                     | Quasi-Peak, CISPR-Average                               |
| Bandwidth                    | 9 kHz (6 dB)                                            |
| Worst Case of Operating Mode | FRONT CAMERA & MP3 mode<br>Dual Recording mode          |
| Kind of Test Site            | EMI Shielded Room                                       |
| Temperature                  | 24.6 / 24.1 °C                                          |
| Relative Humidity            | 47.8 / 48.6 %                                           |
| Test Date                    | August 12 / August 20, 2020                             |

### 4.1.3 Measuring Data

Figure 1: Conducted Emission (150 kHz to 30 MHz), FRONT CAMERA & MP3 mode, Line (L1)

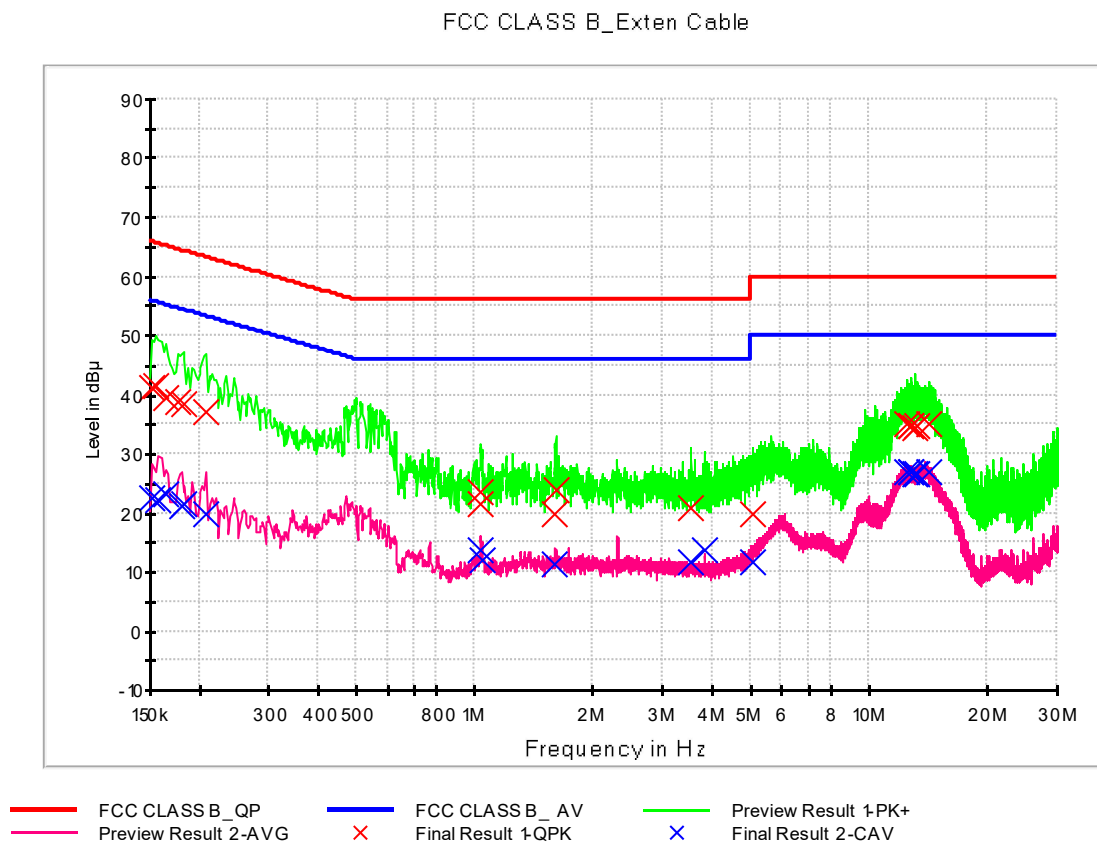

## QuasiPeak Final Result, Line (L1)

| Frequency<br>(MHz) | QuasiPeak<br>(dBμV) | Bandwidth<br>(kHz) | Line | Corr.<br>(dB) | Margin<br>(dB) | Limit<br>(dBμV) |
|--------------------|---------------------|--------------------|------|---------------|----------------|-----------------|
| 0.152000           | 41.3                | 9.000              | L1   | 9.8           | 24.6           | 65.9            |
| 0.156000           | 41.4                | 9.000              | L1   | 9.8           | 24.2           | 65.7            |
| 0.164000           | 39.5                | 9.000              | L1   | 9.8           | 25.8           | 65.3            |
| 0.176000           | 38.7                | 9.000              | L1   | 9.8           | 25.9           | 64.7            |
| 0.182000           | 38.5                | 9.000              | L1   | 9.8           | 25.9           | 64.4            |
| 0.208000           | 37.2                | 9.000              | L1   | 9.8           | 26.1           | 63.3            |
| 1.034000           | 23.5                | 9.000              | L1   | 9.8           | 32.5           | 56.0            |
| 1.038000           | 21.5                | 9.000              | L1   | 9.8           | 34.5           | 56.0            |
| 1.600000           | 19.7                | 9.000              | L1   | 9.9           | 36.3           | 56.0            |
| 1.604000           | 23.9                | 9.000              | L1   | 9.9           | 32.1           | 56.0            |
| 3.546000           | 20.9                | 9.000              | L1   | 9.9           | 35.1           | 56.0            |
| 5.092000           | 19.8                | 9.000              | L1   | 10.0          | 40.2           | 60.0            |
| 12.514000          | 35.1                | 9.000              | L1   | 10.3          | 24.9           | 60.0            |
| 12.748000          | 34.9                | 9.000              | L1   | 10.3          | 25.1           | 60.0            |
| 12.784000          | 34.6                | 9.000              | L1   | 10.3          | 25.4           | 60.0            |
| 13.112000          | 34.5                | 9.000              | L1   | 10.3          | 25.5           | 60.0            |
| 13.210000          | 34.7                | 9.000              | L1   | 10.3          | 25.3           | 60.0            |
| 14.112000          | 35.1                | 9.000              | L1   | 10.3          | 24.9           | 60.0            |


## Calculation Formula:

1. Conductor L1 = Hot, Conductor N = Neutral
2. Corr. = LISN Factor + Cable Loss
3. QuasiPeak or CAverage= Receiver Reading + Corr.
4. Margin = Limit – QuasiPeak or CAverage

CAverage Final Result, Line (L1)

| Frequency<br>(MHz) | CAverage<br>(dBμV) | Bandwidth<br>(kHz) | Line | Corr.<br>(dB) | Margin<br>(dB) | Limit<br>(dBμV) |
|--------------------|--------------------|--------------------|------|---------------|----------------|-----------------|
| 0.152000           | 22.5               | 9.000              | L1   | 9.8           | 33.4           | 55.9            |
| 0.158000           | 22.3               | 9.000              | L1   | 9.8           | 33.3           | 55.6            |
| 0.164000           | 23.2               | 9.000              | L1   | 9.8           | 32.1           | 55.3            |
| 0.180000           | 21.3               | 9.000              | L1   | 9.8           | 33.2           | 54.5            |
| 0.184000           | 21.5               | 9.000              | L1   | 9.8           | 32.8           | 54.3            |
| 0.208000           | 19.7               | 9.000              | L1   | 9.8           | 33.6           | 53.3            |
| 1.036000           | 13.6               | 9.000              | L1   | 9.8           | 32.4           | 46.0            |
| 1.042000           | 12.1               | 9.000              | L1   | 9.8           | 33.9           | 46.0            |
| 1.602000           | 11.2               | 9.000              | L1   | 9.9           | 34.8           | 46.0            |
| 3.546000           | 11.6               | 9.000              | L1   | 9.9           | 34.4           | 46.0            |
| 3.836000           | 13.7               | 9.000              | L1   | 10.0          | 32.3           | 46.0            |
| 5.092000           | 11.8               | 9.000              | L1   | 10.0          | 38.2           | 50.0            |
| 12.514000          | 27.0               | 9.000              | L1   | 10.3          | 23.0           | 50.0            |
| 12.748000          | 26.9               | 9.000              | L1   | 10.3          | 23.1           | 50.0            |
| 12.784000          | 26.9               | 9.000              | L1   | 10.3          | 23.1           | 50.0            |
| 13.112000          | 26.7               | 9.000              | L1   | 10.3          | 23.3           | 50.0            |
| 13.210000          | 26.7               | 9.000              | L1   | 10.3          | 23.3           | 50.0            |
| 14.112000          | 26.9               | 9.000              | L1   | 10.3          | 23.1           | 50.0            |

Figure 2: Conducted Emission (150 kHz to 30 MHz), FRONT CAMERA & MP3 mode, Line (N)

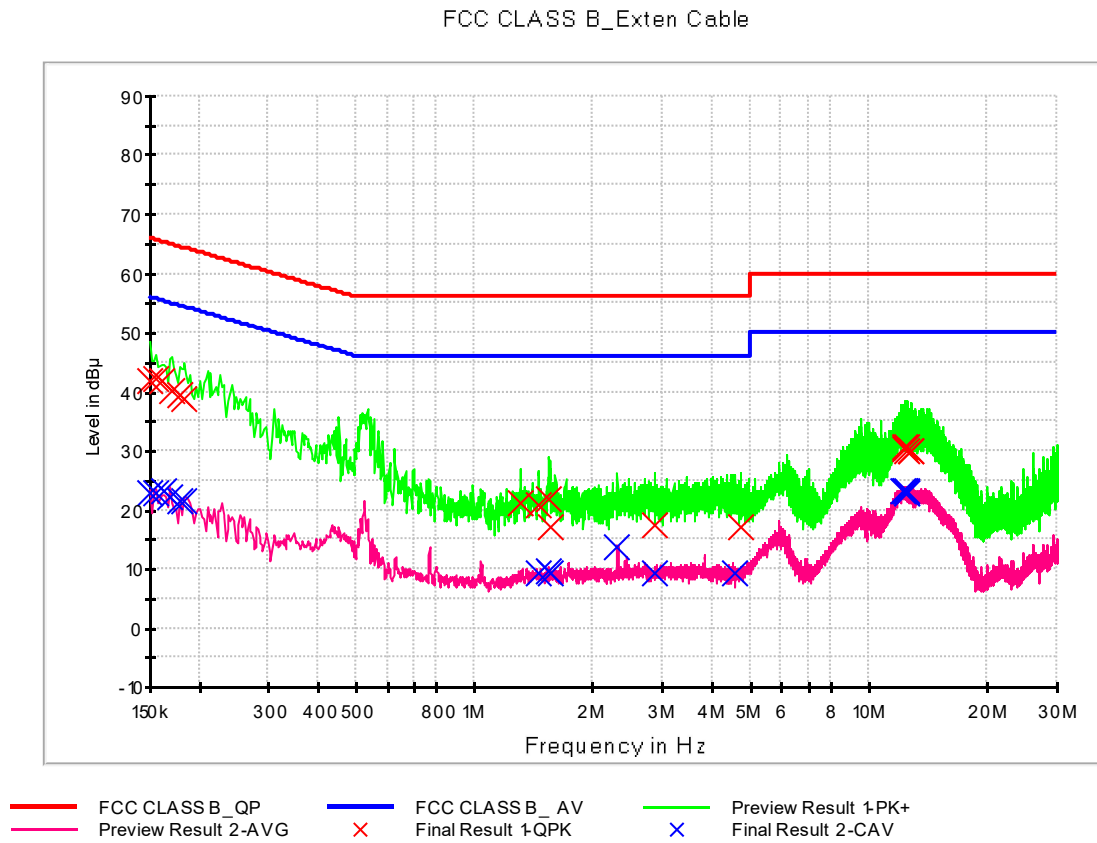


## QuasiPeak Final Result, Line (N)

| Frequency<br>(MHz) | QuasiPeak<br>(dBμV) | Bandwidth<br>(kHz) | Line | Corr.<br>(dB) | Margin<br>(dB) | Limit<br>(dBμV) |
|--------------------|---------------------|--------------------|------|---------------|----------------|-----------------|
| 0.150000           | 42.0                | 9.000              | N    | 9.8           | 24.0           | 66.0            |
| 0.156000           | 42.3                | 9.000              | N    | 9.8           | 23.3           | 65.7            |
| 0.160000           | 41.8                | 9.000              | N    | 9.8           | 23.7           | 65.5            |
| 0.170000           | 40.1                | 9.000              | N    | 9.8           | 24.8           | 65.0            |
| 0.178000           | 39.3                | 9.000              | N    | 9.8           | 25.2           | 64.6            |
| 0.184000           | 38.7                | 9.000              | N    | 9.8           | 25.7           | 64.3            |
| 1.300000           | 21.1                | 9.000              | N    | 9.8           | 34.9           | 56.0            |
| 1.456000           | 20.8                | 9.000              | N    | 9.9           | 35.2           | 56.0            |
| 1.544000           | 21.7                | 9.000              | N    | 9.9           | 34.3           | 56.0            |
| 1.552000           | 17.2                | 9.000              | N    | 9.9           | 38.8           | 56.0            |
| 2.866000           | 17.4                | 9.000              | N    | 9.9           | 38.6           | 56.0            |
| 4.710000           | 17.2                | 9.000              | N    | 10.0          | 38.8           | 56.0            |
| 12.280000          | 30.6                | 9.000              | N    | 10.3          | 29.4           | 60.0            |
| 12.384000          | 30.4                | 9.000              | N    | 10.3          | 29.6           | 60.0            |
| 12.448000          | 30.7                | 9.000              | N    | 10.3          | 29.3           | 60.0            |
| 12.550000          | 30.1                | 9.000              | N    | 10.4          | 29.9           | 60.0            |
| 12.714000          | 30.1                | 9.000              | N    | 10.4          | 29.9           | 60.0            |
| 12.838000          | 29.9                | 9.000              | N    | 10.4          | 30.1           | 60.0            |

CAverage Final Result, Line (N)

| Frequency<br>(MHz) | CAverage<br>(dBμV) | Bandwidth<br>(kHz) | Line | Corr.<br>(dB) | Margin<br>(dB) | Limit<br>(dBμV) |
|--------------------|--------------------|--------------------|------|---------------|----------------|-----------------|
| 0.150000           | 23.0               | 9.000              | N    | 9.8           | 33.0           | 56.0            |
| 0.156000           | 23.0               | 9.000              | N    | 9.8           | 32.7           | 55.7            |
| 0.162000           | 23.2               | 9.000              | N    | 9.8           | 32.2           | 55.4            |
| 0.168000           | 22.4               | 9.000              | N    | 9.8           | 32.7           | 55.1            |
| 0.178000           | 21.4               | 9.000              | N    | 9.8           | 33.2           | 54.6            |
| 0.184000           | 21.7               | 9.000              | N    | 9.8           | 32.6           | 54.3            |
| 1.452000           | 9.4                | 9.000              | N    | 9.9           | 36.6           | 46.0            |
| 1.544000           | 9.6                | 9.000              | N    | 9.9           | 36.4           | 46.0            |
| 1.552000           | 9.3                | 9.000              | N    | 9.9           | 36.7           | 46.0            |
| 2.302000           | 13.7               | 9.000              | N    | 9.9           | 32.3           | 46.0            |
| 2.866000           | 9.4                | 9.000              | N    | 9.9           | 36.6           | 46.0            |
| 4.572000           | 9.2                | 9.000              | N    | 10.0          | 36.8           | 46.0            |
| 12.214000          | 23.2               | 9.000              | N    | 10.3          | 26.8           | 50.0            |
| 12.280000          | 23.1               | 9.000              | N    | 10.3          | 26.9           | 50.0            |
| 12.384000          | 23.4               | 9.000              | N    | 10.3          | 26.6           | 50.0            |
| 12.410000          | 23.1               | 9.000              | N    | 10.3          | 26.9           | 50.0            |
| 12.540000          | 22.8               | 9.000              | N    | 10.4          | 27.2           | 50.0            |
| 12.550000          | 22.9               | 9.000              | N    | 10.4          | 27.1           | 50.0            |

Figure 3: Conducted Emission (150 kHz to 30 MHz), Dual Recording mode, Line (L1)

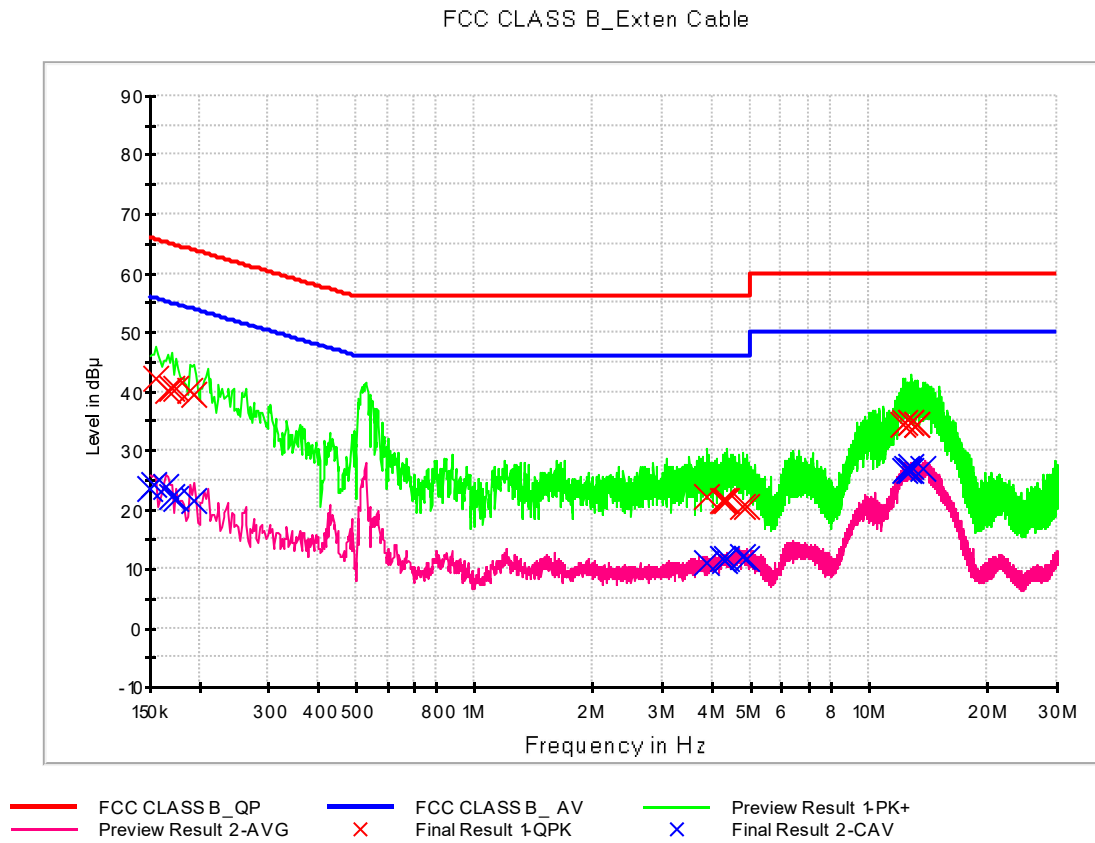


## QuasiPeak Final Result, Line (L1)

| Frequency<br>(MHz) | QuasiPeak<br>(dBμV) | Bandwidth<br>(kHz) | Line | Corr.<br>(dB) | Margin<br>(dB) | Limit<br>(dBμV) |
|--------------------|---------------------|--------------------|------|---------------|----------------|-----------------|
| 0.156000           | 42.1                | 9.000              | L1   | 9.8           | 23.6           | 65.7            |
| 0.166000           | 40.1                | 9.000              | L1   | 9.8           | 25.1           | 65.2            |
| 0.170000           | 40.6                | 9.000              | L1   | 9.8           | 24.3           | 65.0            |
| 0.174000           | 40.5                | 9.000              | L1   | 9.8           | 24.3           | 64.8            |
| 0.190000           | 40.0                | 9.000              | L1   | 9.8           | 24.0           | 64.0            |
| 0.194000           | 39.5                | 9.000              | L1   | 9.8           | 24.4           | 63.9            |
| 3.892000           | 22.0                | 9.000              | L1   | 10.0          | 34.0           | 56.0            |
| 4.244000           | 21.6                | 9.000              | L1   | 10.0          | 34.4           | 56.0            |
| 4.318000           | 21.4                | 9.000              | L1   | 10.0          | 34.6           | 56.0            |
| 4.378000           | 21.4                | 9.000              | L1   | 10.0          | 34.6           | 56.0            |
| 4.772000           | 20.6                | 9.000              | L1   | 10.0          | 35.4           | 56.0            |
| 4.918000           | 20.6                | 9.000              | L1   | 10.0          | 35.4           | 56.0            |
| 12.140000          | 34.2                | 9.000              | L1   | 10.3          | 25.8           | 60.0            |
| 12.294000          | 34.9                | 9.000              | L1   | 10.3          | 25.1           | 60.0            |
| 12.718000          | 34.7                | 9.000              | L1   | 10.3          | 25.3           | 60.0            |
| 12.756000          | 34.8                | 9.000              | L1   | 10.3          | 25.2           | 60.0            |
| 13.214000          | 34.5                | 9.000              | L1   | 10.3          | 25.5           | 60.0            |
| 13.254000          | 34.3                | 9.000              | L1   | 10.3          | 25.7           | 60.0            |

CAverage Final Result, Line (L1)

| Frequency<br>(MHz) | CAverage<br>(dBμV) | Bandwidth<br>(kHz) | Line | Corr.<br>(dB) | Margin<br>(dB) | Limit<br>(dBμV) |
|--------------------|--------------------|--------------------|------|---------------|----------------|-----------------|
| 0.150000           | 23.5               | 9.000              | L1   | 9.8           | 32.5           | 56.0            |
| 0.154000           | 24.3               | 9.000              | L1   | 9.8           | 31.5           | 55.8            |
| 0.164000           | 23.9               | 9.000              | L1   | 9.8           | 31.3           | 55.3            |
| 0.170000           | 22.1               | 9.000              | L1   | 9.8           | 32.9           | 55.0            |
| 0.174000           | 21.9               | 9.000              | L1   | 9.8           | 32.9           | 54.8            |
| 0.194000           | 21.6               | 9.000              | L1   | 9.8           | 32.2           | 53.9            |
| 3.892000           | 11.0               | 9.000              | L1   | 10.0          | 35.0           | 46.0            |
| 4.244000           | 11.6               | 9.000              | L1   | 10.0          | 34.4           | 46.0            |
| 4.318000           | 11.5               | 9.000              | L1   | 10.0          | 34.5           | 46.0            |
| 4.378000           | 11.6               | 9.000              | L1   | 10.0          | 34.4           | 46.0            |
| 4.772000           | 12.0               | 9.000              | L1   | 10.0          | 34.0           | 46.0            |
| 4.918000           | 11.5               | 9.000              | L1   | 10.0          | 34.5           | 46.0            |
| 12.294000          | 26.6               | 9.000              | L1   | 10.3          | 23.4           | 50.0            |
| 12.508000          | 26.8               | 9.000              | L1   | 10.3          | 23.2           | 50.0            |
| 12.680000          | 26.6               | 9.000              | L1   | 10.3          | 23.4           | 50.0            |
| 12.718000          | 27.4               | 9.000              | L1   | 10.3          | 22.6           | 50.0            |
| 12.756000          | 26.6               | 9.000              | L1   | 10.3          | 23.4           | 50.0            |
| 13.708000          | 27.1               | 9.000              | L1   | 10.3          | 22.9           | 50.0            |

Figure 4: Conducted Emission (150 kHz to 30 MHz), Dual Recording mode, Line (N)

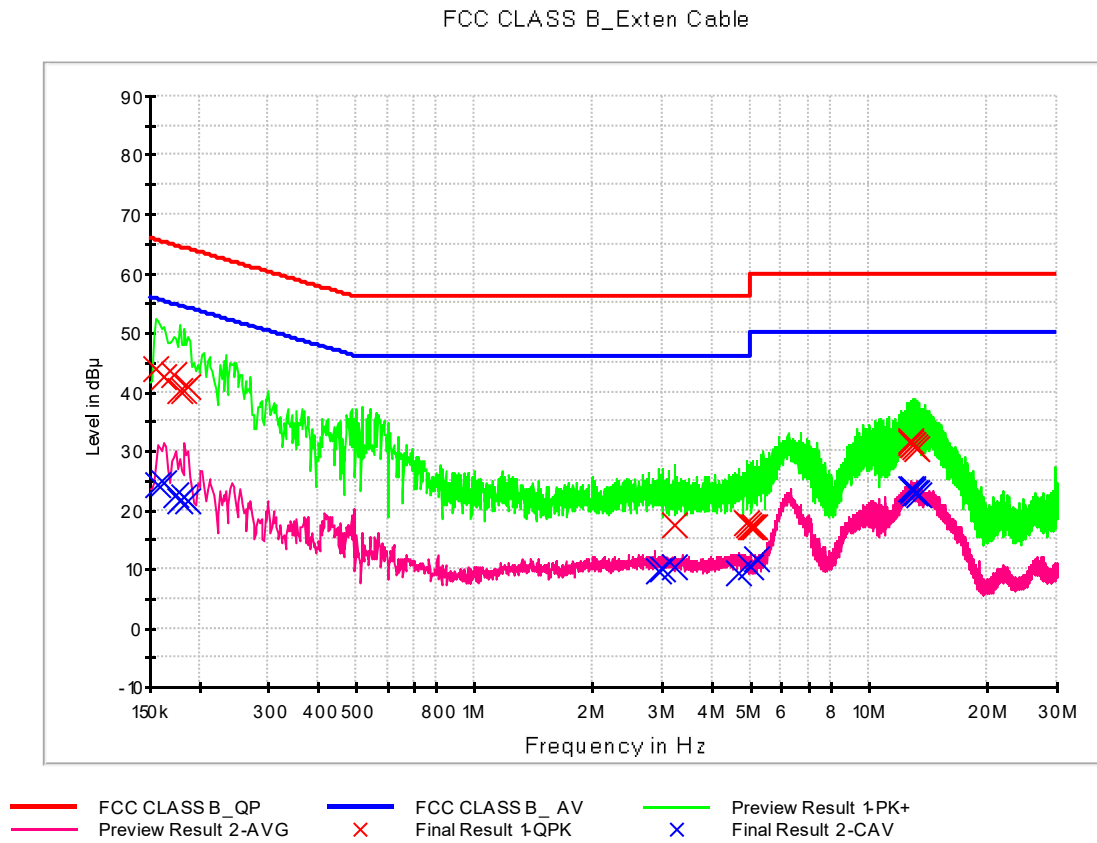

## QuasiPeak Final Result, Line (N)

| Frequency<br>(MHz) | QuasiPeak<br>(dBμV) | Bandwidth<br>(kHz) | Line | Corr.<br>(dB) | Margin<br>(dB) | Limit<br>(dBμV) |
|--------------------|---------------------|--------------------|------|---------------|----------------|-----------------|
| 0.156000           | 43.9                | 9.000              | N    | 9.8           | 21.7           | 65.7            |
| 0.162000           | 42.4                | 9.000              | N    | 9.8           | 23.0           | 65.4            |
| 0.172000           | 43.0                | 9.000              | N    | 9.8           | 21.9           | 64.9            |
| 0.178000           | 40.1                | 9.000              | N    | 9.8           | 24.5           | 64.6            |
| 0.184000           | 40.2                | 9.000              | N    | 9.8           | 24.1           | 64.3            |
| 0.188000           | 41.0                | 9.000              | N    | 9.8           | 23.1           | 64.1            |
| 3.228000           | 17.6                | 9.000              | N    | 9.9           | 38.4           | 56.0            |
| 4.906000           | 17.9                | 9.000              | N    | 10.0          | 38.1           | 56.0            |
| 4.958000           | 17.5                | 9.000              | N    | 10.0          | 38.5           | 56.0            |
| 5.036000           | 17.0                | 9.000              | N    | 10.0          | 43.0           | 60.0            |
| 5.044000           | 17.0                | 9.000              | N    | 10.0          | 43.0           | 60.0            |
| 5.110000           | 17.1                | 9.000              | N    | 10.0          | 42.9           | 60.0            |
| 12.770000          | 31.2                | 9.000              | N    | 10.4          | 28.8           | 60.0            |
| 12.808000          | 31.5                | 9.000              | N    | 10.4          | 28.5           | 60.0            |
| 12.912000          | 31.2                | 9.000              | N    | 10.4          | 28.8           | 60.0            |
| 12.982000          | 31.1                | 9.000              | N    | 10.4          | 28.9           | 60.0            |
| 13.082000          | 30.8                | 9.000              | N    | 10.4          | 29.2           | 60.0            |
| 13.276000          | 30.3                | 9.000              | N    | 10.4          | 29.7           | 60.0            |

CAverage Final Result, Line (N)

| Frequency<br>(MHz) | CAverage<br>(dBμV) | Bandwidth<br>(kHz) | Line | Corr.<br>(dB) | Margin<br>(dB) | Limit<br>(dBμV) |
|--------------------|--------------------|--------------------|------|---------------|----------------|-----------------|
| 0.158000           | 24.3               | 9.000              | N    | 9.8           | 31.3           | 55.6            |
| 0.162000           | 24.5               | 9.000              | N    | 9.8           | 30.9           | 55.4            |
| 0.174000           | 22.5               | 9.000              | N    | 9.8           | 32.3           | 54.8            |
| 0.178000           | 21.5               | 9.000              | N    | 9.8           | 33.0           | 54.6            |
| 0.184000           | 22.3               | 9.000              | N    | 9.8           | 32.0           | 54.3            |
| 0.188000           | 21.7               | 9.000              | N    | 9.8           | 32.4           | 54.1            |
| 2.916000           | 9.7                | 9.000              | N    | 9.9           | 36.3           | 46.0            |
| 2.986000           | 9.8                | 9.000              | N    | 9.9           | 36.2           | 46.0            |
| 3.228000           | 10.2               | 9.000              | N    | 9.9           | 35.8           | 46.0            |
| 4.686000           | 9.4                | 9.000              | N    | 10.0          | 36.6           | 46.0            |
| 5.036000           | 10.5               | 9.000              | N    | 10.0          | 39.5           | 50.0            |
| 5.204000           | 11.7               | 9.000              | N    | 10.0          | 38.3           | 50.0            |
| 12.770000          | 23.7               | 9.000              | N    | 10.4          | 26.3           | 50.0            |
| 12.912000          | 23.5               | 9.000              | N    | 10.4          | 26.5           | 50.0            |
| 12.982000          | 23.2               | 9.000              | N    | 10.4          | 26.8           | 50.0            |
| 13.082000          | 22.9               | 9.000              | N    | 10.4          | 27.1           | 50.0            |
| 13.154000          | 22.8               | 9.000              | N    | 10.4          | 27.2           | 50.0            |
| 13.336000          | 22.5               | 9.000              | N    | 10.4          | 27.5           | 50.0            |

## 4.2 Radiated Emission Below 1 GHz

### 4.2.1 Measuring instruments

|                                     | Type                                   | Manufacturer    | Model Name   | Serial Number             | Calibration Cycle | Calibration Date |
|-------------------------------------|----------------------------------------|-----------------|--------------|---------------------------|-------------------|------------------|
| <input checked="" type="checkbox"/> | EMI test receiver                      | Rohde & Schwarz | ESU40        | 100524                    | 1 year            | 05.12.2020       |
| <input checked="" type="checkbox"/> | Bi-Log antenna                         | Schwarzbeck     | VULB 9168    | 255                       | 2 year            | 03.26.2019       |
| <input checked="" type="checkbox"/> | Antenna master                         | INNCO Systems   | MA4640-XP-ET | -                         | N/A               | -                |
| <input checked="" type="checkbox"/> | Antenna master controller              | INNCO Systems   | CO3000       | CO3000/870/<br>35990515/L | N/A               | -                |
| <input checked="" type="checkbox"/> | Turn table                             | INNCO Systems   | 1060         | -                         | N/A               | -                |
| <input checked="" type="checkbox"/> | Turn table controller                  | INNCO Systems   | CO2000       | CO2000/095/<br>7590304/L  | N/A               | -                |
| <input checked="" type="checkbox"/> | Radio communication analyzer           | ANRITSU         | MT8820C      | 6201138643                | 1 year            | 08.19.2020       |
| <input checked="" type="checkbox"/> | Antenna (for Communication)            | Schwarzbeck     | USLP9142     | VSLP 9142-200             | -                 | -                |
| <input type="checkbox"/>            | Radio communication test station       | ANRITSU         | MT8000A      | 6262036812                | 1 year            | 01.06.2020       |
| <input type="checkbox"/>            | Radio communication analyzer           | ANRITSU         | MT8821C      | 6262044720                | 1 year            | 01.06.2020       |
| <input checked="" type="checkbox"/> | UXM 5G wireless test platform          | KEYSIGHT        | E7515B       | MY58300756                | 1 year            | 01.07.2020       |
| <input checked="" type="checkbox"/> | Antenna (for Communication)            | Schwarzbeck     | USLP9142     | VSLP 9142-201             | -                 | -                |
| <input checked="" type="checkbox"/> | EMI Test Receiver                      | Rohde & Schwarz | ESU40        | 100361                    | 1 year            | 10.01.2019       |
| <input checked="" type="checkbox"/> | Bi-Log Antenna                         | Schwarzbeck     | VULB 9168    | 01156                     | 2 year            | 05.30.2020       |
| <input checked="" type="checkbox"/> | Antenna master                         | INNCO SYSTEM    | MA4640-XP-ET | -                         | -                 | -                |
| <input checked="" type="checkbox"/> | Antenna master / Turn Table controller | INNCO SYSTEM    | CO3000       | CO3000/1250/<br>4892320/P | -                 | -                |
| <input checked="" type="checkbox"/> | Turn Table                             | INNCO SYSTEM    | DS2000-S     | -                         | -                 | -                |
| <input checked="" type="checkbox"/> | Software                               | Rohde & Schwarz | EMC32        | -                         | -                 | -                |

#### 4.2.2 Operating Condition

The test results of radiated emission provide the following information:

|                              |                                                                                                                                                                                                                                     |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Used Test Standard           | FCC CFR 47 PART 15 Subpart B Class B<br>ANSI C63.4-2014                                                                                                                                                                             |
| Frequency Range              | 30 MHz to 1 000 MHz                                                                                                                                                                                                                 |
| Detector                     | Quasi-Peak                                                                                                                                                                                                                          |
| Bandwidth                    | 120 kHz (6 dB)                                                                                                                                                                                                                      |
| Worst Case of Operating Mode | <p><b>[EUT +TA]</b><br/> FRONT CAMERA &amp; MP3 mode<br/> Display mode<br/> Dual Recording mode</p> <p><b>[EUT +Earphone]</b><br/> FRONT CAMERA &amp; MP3 mode<br/> REAR CAMERA &amp; FM RADIO mode<br/> WIRELESS CHARGING mode</p> |
| Kind of Test Site            | 3 m semi anechoic chamber                                                                                                                                                                                                           |
| Temperature                  | 21.6 - 23.7 °C                                                                                                                                                                                                                      |
| Relative Humidity            | 46.1 - 48.4 %                                                                                                                                                                                                                       |
| Test Date                    | August 06, 2020 to August 24, 2020                                                                                                                                                                                                  |

#### - Calculation Formula:

1. POL. H = Horizontal, POL. V = Vertical
2. QuasiPeak = Reading (Receiver Reading) + Corr.
3. Corr. (Correction Factor) = Antenna Factor + Cable Loss
4. Margin = Limit - QuasiPeak

#### 4.2.3 Measuring Data

[EUT +TA] FRONT CAMERA & MP3 mode

| Frequency (MHz) | Quasi Peak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Antenna Height (cm) | POL. (H/V) | Azimuth (deg) | Corr. (dB) |
|-----------------|---------------------|----------------|-------------|---------------------|------------|---------------|------------|
| 34.541000       | 30.16               | 40.00          | 9.84        | 100.0               | V          | 291.0         | 18.8       |
| 43.763000       | 26.51               | 40.00          | 13.49       | 100.0               | V          | 249.0         | 19.8       |
| 83.989000       | 27.21               | 40.00          | 12.80       | 100.0               | V          | 33.0          | 14.8       |
| 131.706000      | 20.47               | 43.50          | 23.03       | 118.1               | V          | 293.0         | 18.6       |
| 188.697000      | 22.80               | 43.50          | 20.70       | 100.0               | V          | 178.0         | 17.6       |
| 797.260000      | 26.94               | 46.00          | 19.06       | 405.9               | V          | 331.0         | 29.9       |

[EUT +TA] DISPLAY mode

| Frequency (MHz) | Quasi Peak (dBμV/m) | Antenna Height (cm) | POL. (H/V) | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBμV/m) |
|-----------------|---------------------|---------------------|------------|---------------|------------|-------------|----------------|
| 31.608000       | 26.7                | 100.0               | V          | 112.0         | 18.4       | 13.3        | 40.0           |
| 52.122160       | 26.9                | 116.8               | V          | 240.0         | 19.7       | 13.1        | 40.0           |
| 128.396360      | 27.4                | 100.0               | V          | 68.0          | 18.1       | 16.1        | 43.5           |
| 172.823400      | 28.1                | 125.0               | H          | 140.0         | 18.9       | 15.4        | 43.5           |
| 334.339600      | 36.6                | 100.0               | V          | 143.0         | 21.3       | 9.4         | 46.0           |
| 669.721640      | 31.7                | 199.7               | V          | 187.0         | 28.3       | 14.3        | 46.0           |

[EUT +TA] Dual Recording mode

| Frequency (MHz) | Quasi Peak (dBμV/m) | Antenna Height (cm) | POL. (H/V) | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBμV/m) |
|-----------------|---------------------|---------------------|------------|---------------|------------|-------------|----------------|
| 41.574520       | 22.7                | 125.0               | V          | 34.0          | 19.1       | 17.3        | 40.0           |
| 67.622400       | 21.6                | 100.0               | V          | 263.0         | 18.4       | 18.4        | 40.0           |
| 110.073920      | 22.7                | 100.0               | V          | 183.0         | 16.3       | 20.8        | 43.5           |
| 141.068080      | 25.4                | 100.0               | V          | 166.0         | 19.0       | 18.1        | 43.5           |
| 170.683240      | 25.8                | 100.0               | V          | 87.0          | 19.0       | 17.7        | 43.5           |
| 645.876120      | 28.9                | 174.8               | V          | 88.0          | 28.0       | 17.1        | 46.0           |

## [EUT +Earphone] FRONT CAMERA &amp; MP3 mode

| Frequency (MHz) | Quasi Peak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Antenna Height (cm) | POL. (H/V) | Azimuth (deg) | Corr. (dB) |
|-----------------|---------------------|----------------|-------------|---------------------|------------|---------------|------------|
| 73.001000       | 24.45               | 40.00          | 15.55       | 410.3               | H          | 260.0         | 17.1       |
| 77.985000       | 22.66               | 40.00          | 17.34       | 225.0               | H          | 250.0         | 15.7       |
| 82.022000       | 22.27               | 40.00          | 17.73       | 410.2               | H          | 259.0         | 15.0       |
| 164.259000      | 20.72               | 43.50          | 22.78       | 125.1               | H          | 242.0         | 19.5       |
| 272.962000      | 17.80               | 46.00          | 28.20       | 102.9               | H          | 64.0          | 19.5       |
| 629.341000      | 24.08               | 46.00          | 21.92       | 377.5               | H          | 19.0          | 27.4       |

## [EUT +Earphone] REAR CAMERA &amp; FM RADIO mode

| Frequency (MHz) | Quasi Peak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Antenna Height (cm) | POL. (H/V) | Azimuth (deg) | Corr. (dB) |
|-----------------|---------------------|----------------|-------------|---------------------|------------|---------------|------------|
| 72.741000       | 20.00               | 40.00          | 20.00       | 396.1               | H          | 99.0          | 17.1       |
| 76.138000       | 22.00               | 40.00          | 18.00       | 321.1               | H          | 259.0         | 16.2       |
| 95.960000       | 21.00               | 43.50          | 22.50       | 410.1               | H          | 260.0         | 14.8       |
| 164.054000      | 25.00               | 43.50          | 18.50       | 410.1               | H          | 264.0         | 15.9       |
| 491.045000      | 21.61               | 46.00          | 24.39       | 225.2               | H          | 250.0         | 24.8       |
| 703.672000      | 25.23               | 46.00          | 20.77       | 178.2               | H          | 50.0          | 28.3       |

## [EUT +Earphone] WIRELESS CHARGING mode

| Frequency (MHz) | Quasi Peak (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Antenna Height (cm) | POL. (H/V) | Azimuth (deg) | Corr. (dB) |
|-----------------|---------------------|----------------|-------------|---------------------|------------|---------------|------------|
| 46.034000       | 19.69               | 40.00          | 20.31       | 100.0               | V          | 221.0         | 19.9       |
| 53.320000       | 25.10               | 40.00          | 14.90       | 100.0               | V          | 186.0         | 19.7       |
| 88.019000       | 21.81               | 43.50          | 21.69       | 379.1               | H          | 84.0          | 14.3       |
| 160.020000      | 23.76               | 43.50          | 19.74       | 100.0               | V          | 261.0         | 19.9       |
| 213.330000      | 28.98               | 43.50          | 14.52       | 100.0               | V          | -8.0          | 17.2       |
| 266.690000      | 25.28               | 46.00          | 20.72       | 274.7               | H          | 189.0         | 19.3       |

### 4.3 Radiated Emission Above 1 GHz

#### 4.3.1 Measuring instruments

|                                     | Type                                   | Manufacturer    | Model Name   | Serial Number             | Calibration Cycle | Calibration Date |
|-------------------------------------|----------------------------------------|-----------------|--------------|---------------------------|-------------------|------------------|
| <input checked="" type="checkbox"/> | EMI test receiver                      | Rohde & Schwarz | ESU40        | 100524                    | 1 year            | 05.12.2020       |
| <input checked="" type="checkbox"/> | Antenna master                         | INNCO Systems   | MA4640-XP-ET | -                         | N/A               | -                |
| <input checked="" type="checkbox"/> | Antenna master controller              | INNCO Systems   | CO3000       | CO3000/870/<br>35990515/L | N/A               | -                |
| <input checked="" type="checkbox"/> | Turn table                             | INNCO Systems   | 1060         | -                         | N/A               | -                |
| <input checked="" type="checkbox"/> | Turn table controller                  | INNCO Systems   | CO2000       | CO2000/095/<br>7590304/L  | N/A               | -                |
| <input checked="" type="checkbox"/> | Low noise amplifier                    | TESTEK          | TK-PA18H     | 170034-L                  | 1 year            | 03.03.2020       |
| <input checked="" type="checkbox"/> | Low noise amplifier                    | TESTEK          | TK-PA1840H   | 170030-L                  | 1 year            | 02.13.2020       |
| <input checked="" type="checkbox"/> | Radio communication analyzer           | ANRITSU         | MT8820C      | 6201138643                | 1 year            | 08.19.2020       |
| <input checked="" type="checkbox"/> | Antenna<br>(for Communication)         | Schwarzbeck     | USLP9142     | VSLP 9142-200             | -                 | -                |
| <input checked="" type="checkbox"/> | UXM 5G wireless test platform          | KEYSIGHT        | E7515B       | MY58300756                | 1 year            | 01.07.2020       |
| <input checked="" type="checkbox"/> | Antenna<br>(for Communication)         | Schwarzbeck     | USLP9142     | VSLP 9142-201             | -                 | -                |
| <input checked="" type="checkbox"/> | Horn antenna                           | Schwarzbeck     | BBHA 9120D   | 01836                     | 1 year            | 07.23.2020       |
| <input checked="" type="checkbox"/> | Horn antenna                           | Schwarzbeck     | BBHA 9170    | BBHA9170#786              | 1 year            | 12.03.2019       |
| <input checked="" type="checkbox"/> | EMI Test Receiver                      | Rohde & Schwarz | ESU40        | 100361                    | 1 year            | 10.01.2019       |
| <input checked="" type="checkbox"/> | Antenna master                         | INNCO SYSTEM    | MA4640-XP-ET | -                         | -                 | -                |
| <input checked="" type="checkbox"/> | Antenna master / Turn Table controller | INNCO SYSTEM    | CO3000       | CO3000/1250/<br>4892320/P | -                 | -                |
| <input checked="" type="checkbox"/> | Turn Table                             | INNCO SYSTEM    | DS2000-S     | -                         | -                 | -                |
| <input checked="" type="checkbox"/> | Low Noise Amplifier                    | TESTEK          | TK-PA18H     | 170012-L                  | 1 year            | 04.01.2020       |
| <input checked="" type="checkbox"/> | Horn Antenna                           | Schwarzbeck     | BBHA 9120D   | 1641                      | 1 year            | 06.24.2020       |
| <input checked="" type="checkbox"/> | Software                               | Rohde & Schwarz | EMC32        | -                         | -                 | -                |

#### 4.3.2 Operating Condition

The test results of radiated emission provide the following information:

|                                     |                                                                                                                                                                                        |
|-------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Used Test Standard</b>           | FCC CFR 47 PART 15 Subpart B Class B<br>ANSI C63.4-2014                                                                                                                                |
| <b>Detector</b>                     | Peak mode: Peak (RBW: 1 MHz, VBW: 3 MHz)<br>CISPR-Average mode: Peak (RBW: 1 MHz, VBW: 10 Hz)                                                                                          |
| <b>Highest Frequency</b>            | 40 000 MHz                                                                                                                                                                             |
| <b>Tested Frequency Range</b>       | 1 GHz to 40 GHz                                                                                                                                                                        |
| <b>Worst Case of Operating Mode</b> | [EUT +TA]<br>FRONT CAMERA & MP3 mode<br>Display mode<br>Dual Recording mode<br><br>[EUT +Earphone]<br>FRONT CAMERA & MP3 mode<br>REAR CAMERA & FM RADIO mode<br>WIRELESS CHARGING mode |
| <b>Kind of Test Site</b>            | 3 m semi anechoic chamber                                                                                                                                                              |
| <b>Temperature</b>                  | 21.6 – 24.2 °C                                                                                                                                                                         |
| <b>Relative Humidity</b>            | 45.4 – 48.4 %                                                                                                                                                                          |
| <b>Test Date</b>                    | August 06, 2020 to August 24, 2020                                                                                                                                                     |

**- Calculation Formula:**

1. POL. H = Horizontal, POL. V = Vertical
2. Peak or CAverage = Reading (Receiver Reading) + Corr.
3. Corr. (Correction Factor) = Antenna Factor+ Cable Loss –Amplifier Gain
4. Margin = Limit - Peak or CAverage

### 4.3.3 Measuring Data

[EUT +TA] FRONT CAMERA & MP3 mode

| Frequency (MHz) | MaxPeak (dBμV/m) | CAverage (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|-------------------|----------------|-------------|-------------|-----|---------------|------------|
| 1652.930000     | ---              | 18.07             | 54.00          | 35.93       | 400.0       | H   | 91.0          | -19.7      |
| 1692.475000     | 31.10            | ---               | 74.00          | 42.90       | 100.0       | V   | 310.0         | -19.6      |
| 3214.820000     | ---              | 20.72             | 54.00          | 33.28       | 100.0       | V   | 25.0          | -16.5      |
| 3225.885000     | 33.54            | ---               | 74.00          | 40.46       | 199.7       | V   | 123.0         | -16.5      |
| 4854.575000     | ---              | 24.21             | 54.00          | 29.79       | 199.9       | V   | 330.0         | -11.2      |
| 4859.420000     | 36.81            | ---               | 74.00          | 37.19       | 400.0       | V   | 130.0         | -11.1      |
| 11133.110000    | ---              | 31.69             | 54.00          | 22.31       | 299.9       | V   | 108.0         | 2.8        |
| 11148.230000    | 45.02            | ---               | 74.00          | 28.98       | 299.7       | V   | 80.0          | 2.8        |
| 14415.710000    | ---              | 35.48             | 54.00          | 18.52       | 400.0       | V   | 82.0          | 7.4        |
| 14440.425000    | 48.11            | ---               | 74.00          | 25.89       | 100.0       | H   | 45.0          | 7.4        |
| 17976.956460    | 54.80            | ---               | 74.00          | 19.20       | 400.0       | H   | 101.0         | 15.6       |
| 17991.741690    | ---              | 41.27             | 54.00          | 12.73       | 299.9       | V   | 61.0          | 15.8       |

[EUT +TA] DISPLAY mode

| Frequency (MHz) | Peak (dBμV/m) | Antenna Height (cm) | POL. (H/V) | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBμV/m) |
|-----------------|---------------|---------------------|------------|---------------|------------|-------------|----------------|
| 1045.105000     | 36.9          | 323.5               | V          | 174.0         | -29.1      | 37.1        | 74.0           |
| 1640.030000     | 38.3          | 204.5               | V          | 181.0         | -27.2      | 35.7        | 74.0           |
| 2485.190000     | 43.1          | 219.6               | H          | 126.0         | -24.1      | 30.9        | 74.0           |
| 5400.045000     | 46.4          | 190.6               | H          | 176.0         | -17.3      | 27.6        | 74.0           |
| 14252.185000    | 46.3          | 350.0               | V          | 78.0          | -1.1       | 27.7        | 74.0           |
| 17934.190000    | 54.9          | 277.4               | H          | 267.0         | 8.7        | 19.1        | 74.0           |

| Frequency (MHz) | CAverage (dBμV/m) | Antenna Height (cm) | POL. (H/V) | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBμV/m) |
|-----------------|-------------------|---------------------|------------|---------------|------------|-------------|----------------|
| 1045.105000     | 23.3              | 323.5               | V          | 174.0         | -29.1      | 30.8        | 54.0           |
| 1640.030000     | 25.9              | 204.5               | V          | 181.0         | -27.2      | 28.1        | 54.0           |
| 2485.190000     | 35.2              | 219.6               | H          | 126.0         | -24.1      | 18.8        | 54.0           |
| 5400.045000     | 42.7              | 190.6               | H          | 176.0         | -17.3      | 11.3        | 54.0           |
| 14252.185000    | 33.8              | 350.0               | V          | 78.0          | -1.1       | 20.2        | 54.0           |
| 17934.190000    | 42.4              | 277.4               | H          | 267.0         | 8.7        | 11.6        | 54.0           |

[EUT +TA] Dual Recording mode

| Frequency (MHz) | Peak (dBμV/m) | Antenna Height (cm) | POL. (H/V) | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBμV/m) |
|-----------------|---------------|---------------------|------------|---------------|------------|-------------|----------------|
| 1788.250000     | 30.9          | 140.6               | V          | 130.0         | -26.9      | 43.1        | 74.0           |
| 3243.455000     | 33.0          | 219.6               | V          | 348.0         | -22.2      | 41.0        | 74.0           |
| 5142.900000     | 36.2          | 337.7               | H          | 0.0           | -17.6      | 37.8        | 74.0           |
| 9929.620000     | 43.9          | 204.5               | V          | 0.0           | -8.6       | 30.1        | 74.0           |
| 11266.150000    | 45.8          | 150.0               | V          | 251.0         | -4.6       | 28.2        | 74.0           |
| 17956.750000    | 55.2          | 249.9               | V          | 149.0         | 9.0        | 18.8        | 74.0           |

| Frequency (MHz) | CAverage (dBμV/m) | Antenna Height (cm) | POL. (H/V) | Azimuth (deg) | Corr. (dB) | Margin (dB) | Limit (dBμV/m) |
|-----------------|-------------------|---------------------|------------|---------------|------------|-------------|----------------|
| 1788.250000     | 18.1              | 140.6               | V          | 130.0         | -26.9      | 35.9        | 54.0           |
| 3243.455000     | 20.2              | 219.6               | V          | 348.0         | -22.2      | 33.8        | 54.0           |
| 5142.900000     | 23.7              | 337.7               | H          | 0.0           | -17.6      | 30.3        | 54.0           |
| 9929.620000     | 30.9              | 204.5               | V          | 0.0           | -8.6       | 23.1        | 54.0           |
| 11266.150000    | 32.5              | 150.0               | V          | 251.0         | -4.6       | 21.5        | 54.0           |
| 17956.750000    | 42.7              | 249.9               | V          | 149.0         | 9.0        | 11.4        | 54.0           |

[EUT +Earphone] FRONT CAMERA &amp; MP3 mode

| Frequency (MHz) | MaxPeak (dBμV/m) | CAverage (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|-------------------|----------------|-------------|-------------|-----|---------------|------------|
| 1702.220000     | ---              | 18.01             | 54.00          | 35.99       | 299.9       | V   | 303.0         | -19.6      |
| 1736.050000     | 30.57            | ---               | 74.00          | 43.43       | 399.9       | V   | 254.0         | -19.6      |
| 2635.845000     | 33.26            | ---               | 74.00          | 40.74       | 100.0       | V   | 281.0         | -17.4      |
| 2654.120000     | ---              | 20.17             | 54.00          | 33.83       | 299.9       | V   | 130.0         | -17.4      |
| 4786.825000     | ---              | 23.16             | 54.00          | 30.84       | 199.5       | H   | 40.0          | -11.4      |
| 4841.620000     | 37.04            | ---               | 74.00          | 36.96       | 299.7       | V   | 307.0         | -11.2      |
| 8198.350000     | 41.58            | ---               | 74.00          | 32.43       | 100.0       | V   | 282.0         | -3.2       |
| 8249.215000     | ---              | 29.64             | 54.00          | 24.36       | 400.0       | H   | 14.0          | -3.2       |
| 14400.000000    | 48.31            | ---               | 74.00          | 25.69       | 299.7       | V   | 190.0         | 7.4        |
| 14476.595000    | ---              | 35.24             | 54.00          | 18.76       | 100.0       | V   | 23.0          | 7.5        |
| 17983.752360    | 54.95            | ---               | 74.00          | 19.05       | 399.9       | V   | 122.0         | 15.7       |
| 17993.447820    | ---              | 41.94             | 54.00          | 12.06       | 199.9       | V   | -6.0          | 15.8       |

## [EUT +Earphone] REAR CAMERA &amp; FM RADIO mode

| Frequency (MHz) | MaxPeak (dBμV/m) | CAverage (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|-------------------|----------------|-------------|-------------|-----|---------------|------------|
| 1829.480000     | 30.45            | ---               | 74.00          | 43.55       | 100.0       | V   | 25.0          | -19.4      |
| 1837.375000     | ---              | 18.08             | 54.00          | 35.92       | 100.0       | V   | 115.0         | -19.4      |
| 2499.485000     | 34.81            | ---               | 74.00          | 39.19       | 100.0       | V   | 274.0         | -17.7      |
| 2519.385000     | ---              | 19.31             | 54.00          | 34.69       | 100.0       | V   | 251.0         | -17.7      |
| 4803.735000     | ---              | 23.36             | 54.00          | 30.64       | 200.0       | V   | 133.0         | -11.3      |
| 4823.770000     | 36.47            | ---               | 74.00          | 37.53       | 299.7       | H   | -23.0         | -11.3      |
| 10351.040000    | 45.55            | ---               | 74.00          | 28.45       | 100.0       | H   | 20.0          | 0.6        |
| 10364.860000    | ---              | 32.55             | 54.00          | 21.45       | 199.9       | H   | -11.0         | 0.7        |
| 14467.045000    | 47.63            | ---               | 74.00          | 26.37       | 200.0       | H   | 188.0         | 7.5        |
| 14484.850000    | ---              | 35.48             | 54.00          | 18.52       | 199.9       | H   | 69.0          | 7.5        |
| 17996.964210    | ---              | 41.53             | 54.00          | 12.47       | 100.0       | H   | 25.0          | 15.8       |
| 17998.330080    | 54.24            | ---               | 74.00          | 19.76       | 299.7       | H   | 281.0         | 15.8       |

## [EUT +Earphone] WIRELESS CHARGING mode

| Frequency (MHz) | MaxPeak (dBμV/m) | CAverage (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB) |
|-----------------|------------------|-------------------|----------------|-------------|-------------|-----|---------------|------------|
| 3140.820000     | 33.54            | ---               | 74.00          | 40.46       | 299.9       | V   | 85.0          | -16.6      |
| 3148.115000     | ---              | 20.36             | 54.00          | 33.64       | 299.5       | H   | -25.0         | -16.6      |
| 4834.925000     | 36.74            | ---               | 74.00          | 37.26       | 199.9       | V   | 328.0         | -11.2      |
| 4844.525000     | ---              | 24.11             | 54.00          | 29.89       | 399.7       | V   | 107.0         | -11.2      |
| 8238.075000     | ---              | 28.86             | 54.00          | 25.14       | 299.8       | V   | 15.0          | -3.2       |
| 8248.415000     | 42.50            | ---               | 74.00          | 31.50       | 199.9       | H   | 84.0          | -3.2       |
| 11005.320000    | 46.11            | ---               | 74.00          | 27.89       | 299.9       | V   | 41.0          | 2.6        |
| 11051.565000    | ---              | 32.09             | 54.00          | 21.91       | 100.0       | V   | 28.0          | 2.7        |
| 14380.100000    | ---              | 34.92             | 54.00          | 19.08       | 400.0       | H   | 28.0          | 7.3        |
| 14508.765000    | 47.64            | ---               | 74.00          | 26.36       | 400.0       | V   | 335.0         | 7.5        |
| 17987.697600    | ---              | 41.59             | 54.00          | 12.41       | 399.7       | V   | 17.0          | 15.7       |
| 17998.625000    | 53.64            | ---               | 74.00          | 20.36       | 400.0       | V   | 230.0         | 15.8       |

## 5. CONCLUSION

The data collected shows that the **Product Name: Multi-band CDMA/GSM/EDGE/WCDMA/LTE/5G NR Phone with WLAN, BT and RFID / Model Name: LM-F100VM** complies with §15.107 and §15.109 of the FCC rules.

## 6. APPENDIX A. TEST SETUP PHOTO

Please refer to Appendix. A and test setup photo file no. as follows;

| File No.            | Date of Issue   | Description     |
|---------------------|-----------------|-----------------|
| HCT-EM-2008-FC018-P | August 26, 2020 | Initial Release |

End of report