

EMI TEST REPORT FCC CERTIFICATION

Applicant:

LG Electronics MobileComm U.S.A., Inc.
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Date of Receipt: June 20, 2017

Date of Issue: August 03, 2017

Test Report No. HCT-E-1706-F015-1

HCT FRN: 0005866421

FCC ID :

ZNFG011C

Rule Part(s) / Standard(s): FCC CFR 47 PART 15 Subpart B Class B

FCC Classification: JBP (Part 15 B – Class B Computing Device Peripheral)

EUT Type: CDMA/GSM/WCDMA/LTE phone with Bluetooth, WLAN and RFID

Model Name: G011C


Date of Test: June 22, 2017 – June 23, 2017

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2014. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862

Tested By



Ju-Han You
Test Engineer
EMC Team
Certification Division

Reviewed By



Jin-Pyo Hong
Technical Manager
EMC Team
Certification Division

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.



REVISION HISTORY

The revision history for this document is shown in table.

Version	Date	Description
HCT-E-1706-F015	June 27, 2017	Initial Release
HCT-E-1706-F015-1	August 03, 2017	Correction of test setup photo. (See ATTACHMENT: TEST SETUP PHOTOGRAPHS)



TABLE OF CONTENTS

	PAGE
1. GENERAL INFORMATION	4
1.1 Description of EUT	4
1.2 Related Submittal(s) / Grant(s).....	5
1.3 Test Facility	6
1.4 Calibration of Measuring Instrument	6
1.5 Tested System Details.....	7
1.6 Cable Description	7
1.7 Noise Suppression Parts on Cable. (I/O Cable)	7
2. MEASUREMENT UNCERTAINTY	8
3. DESCRIPTION OF TEST	9
3.1 Measurement of Conducted Emission.....	9
3.2 Measurement of Radiated Measurements	10
4. PRELIMINARY TEST	12
4.1 Conducted Emission Test	12
4. 2 Radiated Emission Test	12
5. CONDUCTED AND RADIATED EMISSION TEST SUMMARY	13
5.1 Conducted Emission Test	13
5.2 Radiated Emission Test	20
6. LIST OF TEST EQUIPMENT	22
7. CONCLUSION	23

ATTACHMENT: TEST SETUP PHOTOGRAPHS



1. GENERAL INFORMATION

1.1 Description of EUT

Its basic purpose is used for communications.

FCC ID	ZNFG011C
Model	G011C
EUT Type	CDMA/GSM/WCDMA/LTE phone with Bluetooth, WLAN and RFID
TX Frequency	824.70 MHz to 848.31 MHz (CDMA BC0) 1 851.25 MHz to 1 908.75 MHz (CDMA BC1) 817.90 MHz to 823.10 MHz (CDMA BC10) 824.20 MHz to 848.80 MHz (GSM 850) 1 850.20 MHz to 1 909.80 MHz (GSM 1 900) 826.40 MHz to 846.60 MHz (WCDMA B5) 1 852.4 MHz to 1 907.6 MHz (WCDMA B2) 1712.4 MHz to 1752.6 MHz (WCDMA B4) 1 850 MHz to 1 910 MHz (LTE B2) 1 710 MHz to 1 755 MHz (LTE B4) 824 MHz to 849 MHz (LTE B5) 2 496 MHz to 2 570 MHz (LTE B7) 699 MHz to 716 MHz (LTE B12) 777 MHz to 787 MHz (LTE B13) 704 MHz to 716 MHz (LTE B17) 1 850 MHz to 1 915 MHz (LTE B25) 814 MHz to 849 MHz (LTE B26) 2 305 MHz to 2 315 MHz (LTE B30) 2 496 MHz to 2 690 MHz (LTE B41) 1 710 MHz to 1 780 MHz (LTE B66) 2 402 MHz to 2 480 MHz (Bluetooth) 2 412 MHz to 2 462 MHz (WiFi 2.4 GHz) 5 180 MHz to 5 240 MHz (WiFi 5 GHz_UNII 1) 5 260 MHz to 5 320 MHz (WiFi 5 GHz_UNII 2A) 5 500 MHz to 5 720 MHz (WiFi 5 GHz_UNII 2C) 5 745 MHz to 5 825 MHz (WiFi 5 GHz_UNII 3)
RX Frequency	869.70 MHz to 893.31 MHz (CDMA BC0) 1 931.25 MHz to 1 988.75 MHz (CDMA BC1) 862.00 MHz to 894.00 MHz (CDMA BC10) 869.20 MHz to 893.80 MHz (GSM 850) 1 930.20 MHz to 1 989.80 MHz (GSM 1 900) 871.40 MHz to 891.60 MHz (WCDMA B5) 1 932.4 MHz to 1 987.6 MHz (WCDMA B2) 2 112.4 MHz to 2 152.6 MHz (WCDMA B4) 1 930 MHz to 1 990 MHz (LTE B2) 2 110 MHz to 2 155 MHz (LTE B4) 869 MHz to 894 MHz (LTE B5) 2 516 MHz to 2 690 MHz (LTE B7) 729 MHz to 746 MHz (LTE B12) 746 MHz to 756 MHz (LTE B13)



RX Frequency	734 MHz to 746 MHz (LTE B17) 1 925 MHz to 1 990 MHz (LTE B25) 859 MHz to 894 MHz (LTE B26) 717 MHz to 728 MHz (LTE B29) 2 350 MHz to 2 360 MHz (LTE B30) 2 496 MHz to 2 690 MHz (LTE B41) 2 110 MHz to 2 200 MHz (LTE B66) 2 402 MHz to 2 480 MHz (Bluetooth) 2 412 MHz to 2 462 MHz (WiFi 2.4 GHz) 5 180 MHz to 5 240 MHz (WiFi 5 GHz_UNII 1) 5 260 MHz to 5 320 MHz (WiFi 5 GHz_UNII 2A) 5 500 MHz to 5 720 MHz (WiFi 5 GHz_UNII 2C) 5 745 MHz to 5 825 MHz (WiFi 5 GHz_UNII 3)
---------------------	---



1.2 Related Submittal(s) / Grant(s)

Original submittal only.

1.3 Test Facility

Test site is located at 74, SEOICHEON-RO, 578BEON-GIL, MAJANG-MYEON, ICHEON-SI, GYEONGGI-DO, SOUTH KOREA. Those measurement facilities are constructed in conformance with the requirements of ANSI C63.4-2014.

Measurement Facilities	Registration Number
Radiated Field strength measurement facility 3 m Semi Anechoic chamber	90661 (July 07, 2015)
Radiated Field strength measurement facility 10 m Semi Anechoic chamber	

1.4 Calibration of Measuring Instrument

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturers recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2006).



1.5 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Model Name	Manufacturer	FCC ID / DoC
EUT	G011C	LG	ZNFG011C
USB Cable	6691-10W3-0183	Foxlink	-
USB Cable	ABA-USB-681-P01	Lotes	-
Notebook PC	C1501W	GOOGLE	-
Notebook PC adaptor	PA-1600-23	LITE-On (Europe)	-
USB mouse	G100s	Logitech	-

1.6 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (m)
EUT	USB type C	Y	Y	(P,D)1.0
Notebook PC	USB type C (Adaptor)	N/A	N	(D)1.8
	USB type A (Mouse)	N/A	Y	(D)2.0

* The marked "(D)" means the data cable and "(P)" means the power cable.

1.7 Noise Suppression Parts on Cable. (I/O Cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
EUT	USB type C	N	N/A	Y	Both End
Notebook PC	USB type A (Mouse)	N	N/A	Y	Notebook PC End



2. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Emission (0.15 MHz to 30 MHz)	± 1.82 dB ($k = 2$)
Radiated Emissions (30 MHz to 1 GHz)	± 5.06 dB ($k = 2$)
Radiated Emissions (1 GHz to 6 GHz)	± 5.0 dB ($k = 2$)
Radiated Emissions (6 GHz to 18 GHz)	± 5.4 dB ($k = 2$)



3. DESCRIPTION OF TEST

3.1 Measurement of Conducted Emission

The test procedure was in accordance with ANSI C63.4-2014, Clause 7.3

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN).
If the EUT is connected to the PC through USB, the AC power-line adapter of the PC is directly connected to a line impedance stabilization network (LISN).
Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both conducted lines are measured in Quasi-Peak and Average mode, including the worst-case data points for each tested configuration.
- c. The frequency range from 150 kHz to 30 MHz was searched.

[Conducted Emission Limits]

Frequency (MHz)	Resolution Bandwidth (kHz)	Quasi-Peak (dB(μV))	Average (dB(μV))
0.15 to 0.5	9	66 to 56*	56 to 46*
0.5 to 5	9	56	46
5 to 30	9	60	50

**Decreases with the logarithm of the frequency.*



3.2 Measurement of Radiated Emission

The test procedure was in accordance with ANSI C63.4-2014, Clause 8.3

- a. The EUT was placed on the top of a turn table 0.8 meters above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 m away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from 1 m to 4 m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 m to 4 m and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to Peak and Average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- g. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.(1 GHz to 40 GHz)

[Radiated Emission Limits]

Frequency (MHz)	Antenna Distance (m)	Field Strength ($\mu\text{V}/\text{m}$)	Quasi-Peak ($\text{dB}(\mu\text{V})/\text{m}$)
30 to 88	3	100	40.0
88 to 216	3	150	43.5
216 to 960	3	200	46.0
Above 960	3	500	54.0
Frequency (MHz)	Antenna Distance (m)	Peak ($\text{dB}(\mu\text{V})/\text{m}$)	Average ($\text{dB}(\mu\text{V})/\text{m}$)
Above 1 000	3	74	54




3.2.1 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

3.3 Configuration of Tested System

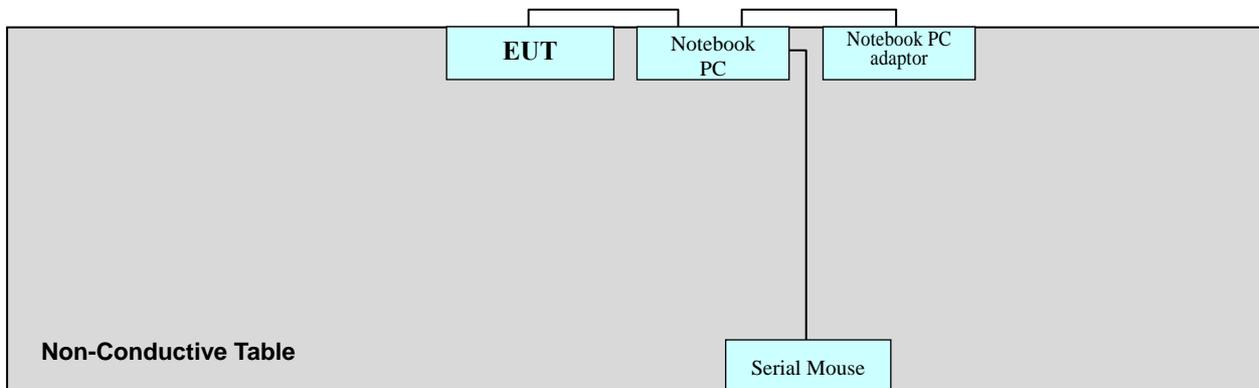

Power Line: 120 VAC, 60 Hz



4. PRELIMINARY TEST

4.1 Conducted Emission Test

It was tested Data Communication mode, after connecting all peripheral devices.

Operation Mode: Data Communication mode

4.2 Radiated Emission Test

It was tested Data Communication mode, after connecting all peripheral devices.

Operation Mode: Data Communication mode



5. CONDUCTED AND RADIATED EMISSION TEST SUMMARY

5.1 Conducted Emission Test

The test results of conducted emission at mains ports provide the following information:


Rule Part / Standard	FCC PART 15 Subpart B Class B
Detector	Quasi-Peak, CISPR-Average
Bandwidth	9 kHz (6 dB)
Worst Case of USB Type	Foxlink
Operation Mode	Data Communication mode
Kind of Test Site	Shielded Room
Temperature	23.0 °C
Relative Humidity	44.5 %
Test Date	June 22, 2017

- Calculation Formula:

1. Conductor L1 = Hot, Conductor N = Neutral
2. Corr. = LISN Factor + Cable Loss
3. QuasiPeak or CAverage= Receiver Reading + Corr.
4. Margin = Limit – QuasiPeak or CAverage



Figure 1: Spectral Diagrams, Conducted Emission, AC Main Port, Line (L1)

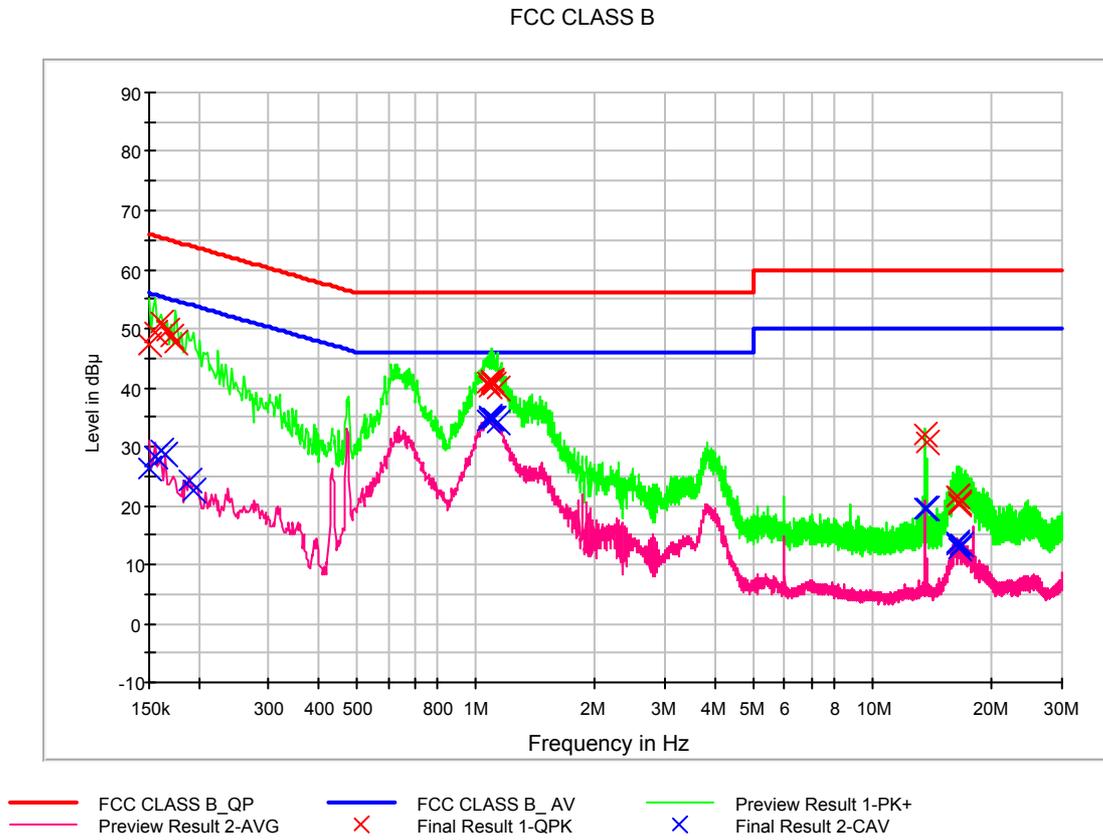



QuasiPeak Final Result, Line (L1)

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	47.3	9.000	L1	9.6	18.7	66.0
0.156000	49.4	9.000	L1	9.6	16.2	65.7
0.160000	51.1	9.000	L1	9.6	14.4	65.5
0.166000	49.8	9.000	L1	9.6	15.4	65.2
0.170000	48.5	9.000	L1	9.6	16.5	65.0
0.174000	47.6	9.000	L1	9.6	17.2	64.8
1.074000	40.8	9.000	L1	9.7	15.2	56.0
1.082000	40.3	9.000	L1	9.7	15.7	56.0
1.090000	41.4	9.000	L1	9.7	14.6	56.0
1.096000	40.7	9.000	L1	9.7	15.3	56.0
1.104000	40.6	9.000	L1	9.7	15.4	56.0
1.132000	39.8	9.000	L1	9.7	16.2	56.0
13.550000	31.9	9.000	L1	10.2	28.1	60.0
13.664000	30.8	9.000	L1	10.2	29.2	60.0
16.264000	21.6	9.000	L1	10.3	38.4	60.0
16.420000	21.7	9.000	L1	10.3	38.3	60.0
16.426000	20.6	9.000	L1	10.3	39.4	60.0
16.500000	20.0	9.000	L1	10.3	40.0	60.0




CAverage Final Result, Line (L1)

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	26.4	9.000	L1	9.6	29.6	56.0
0.156000	28.3	9.000	L1	9.6	27.4	55.7
0.160000	29.3	9.000	L1	9.6	26.2	55.5
0.164000	28.5	9.000	L1	9.6	26.7	55.3
0.190000	24.2	9.000	L1	9.6	29.9	54.0
0.194000	22.6	9.000	L1	9.6	31.3	53.9
1.072000	34.6	9.000	L1	9.7	11.4	46.0
1.078000	34.7	9.000	L1	9.7	11.3	46.0
1.086000	34.9	9.000	L1	9.7	11.1	46.0
1.096000	34.6	9.000	L1	9.7	11.4	46.0
1.104000	34.9	9.000	L1	9.7	11.1	46.0
1.130000	33.9	9.000	L1	9.7	12.1	46.0
13.550000	19.6	9.000	L1	10.2	30.4	50.0
13.664000	19.4	9.000	L1	10.2	30.6	50.0
16.278000	13.3	9.000	L1	10.3	36.7	50.0
16.420000	13.7	9.000	L1	10.3	36.3	50.0
16.582000	12.7	9.000	L1	10.3	37.3	50.0
16.710000	13.4	9.000	L1	10.3	36.6	50.0



Figure 2: Spectral Diagrams, Conducted Emission, AC Main Port, Line (N)

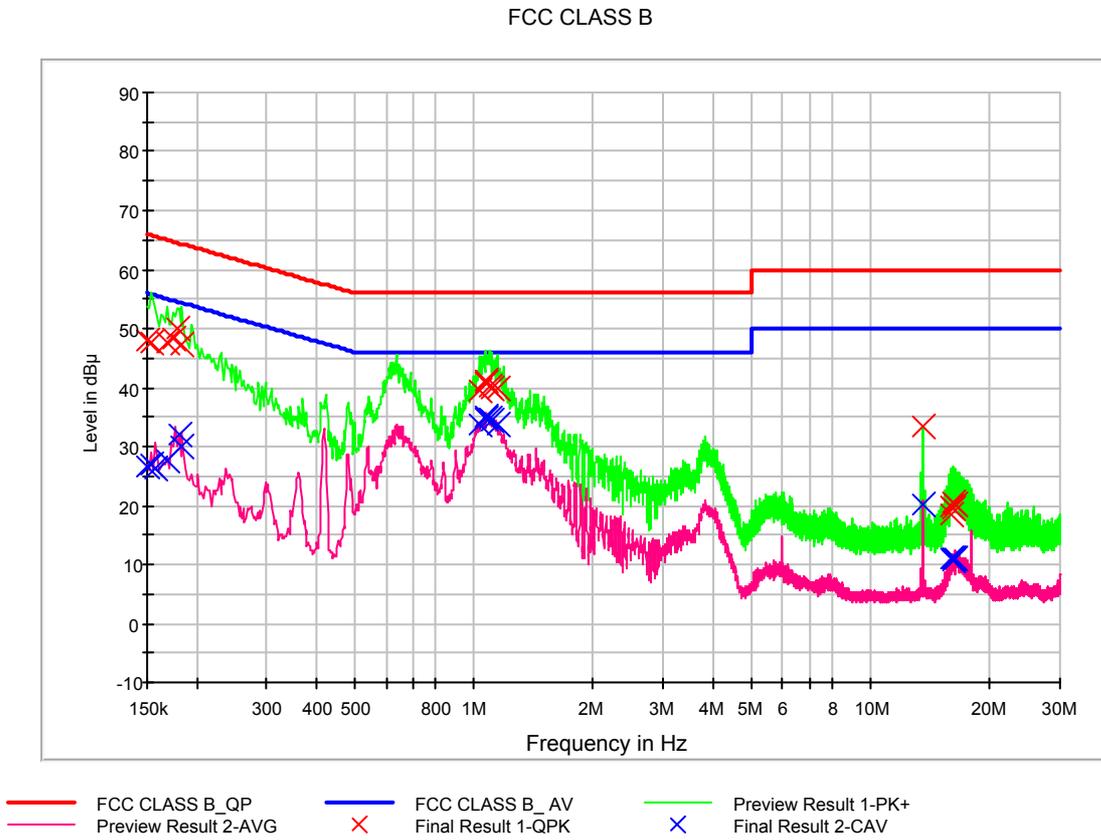



QuasiPeak Final Result, Line (N)

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	48.0	9.000	N	9.6	18.0	66.0
0.154000	47.6	9.000	N	9.6	18.2	65.8
0.168000	47.5	9.000	N	9.6	17.6	65.1
0.174000	48.3	9.000	N	9.6	16.5	64.8
0.178000	50.2	9.000	N	9.6	14.4	64.6
0.184000	47.2	9.000	N	9.6	17.1	64.3
1.036000	39.6	9.000	N	9.7	16.4	56.0
1.070000	41.0	9.000	N	9.7	15.0	56.0
1.076000	41.1	9.000	N	9.7	14.9	56.0
1.092000	40.0	9.000	N	9.7	16.0	56.0
1.104000	39.8	9.000	N	9.7	16.2	56.0
1.142000	39.9	9.000	N	9.7	16.1	56.0
13.568000	33.4	9.000	N	10.2	26.6	60.0
15.976000	19.7	9.000	N	10.3	40.3	60.0
16.028000	18.4	9.000	N	10.3	41.6	60.0
16.132000	19.5	9.000	N	10.3	40.5	60.0
16.190000	20.5	9.000	N	10.3	39.5	60.0
16.412000	20.2	9.000	N	10.3	39.8	60.0



CAverage Final Result, Line (N)

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	26.6	9.000	N	9.6	29.4	56.0
0.154000	27.0	9.000	N	9.6	28.7	55.8
0.158000	26.2	9.000	N	9.6	29.3	55.6
0.168000	27.6	9.000	N	9.6	27.4	55.1
0.180000	32.0	9.000	N	9.6	22.5	54.5
0.184000	29.9	9.000	N	9.6	24.4	54.3
1.036000	33.6	9.000	N	9.7	12.4	46.0
1.070000	34.8	9.000	N	9.7	11.2	46.0
1.076000	35.0	9.000	N	9.7	11.0	46.0
1.092000	34.8	9.000	N	9.7	11.2	46.0
1.104000	34.5	9.000	N	9.7	11.5	46.0
1.142000	33.9	9.000	N	9.7	12.1	46.0
13.568000	20.1	9.000	N	10.2	29.9	50.0
15.976000	10.9	9.000	N	10.3	39.1	50.0
16.110000	11.0	9.000	N	10.3	39.0	50.0
16.134000	10.8	9.000	N	10.3	39.2	50.0
16.190000	11.1	9.000	N	10.3	38.9	50.0
16.326000	10.9	9.000	N	10.3	39.1	50.0



5.2 Radiated Emission Test

The test results of radiated emission provide the following information:

-For Measurement Below 1 GHz

Rule Part / Standard	FCC PART 15 Subpart B Class B
Detector	Quasi-Peak
Bandwidth	120 kHz (6 dB)
Worst Case of USB Type	Foxlink
Operation Mode	Data Communication mode
Kind of Test Site	3 m semi anechoic chamber
Temperature	23.0 °C
Relative Humidity	45.7 %
Test Date	June 22, 2017

Frequency (MHz)	Quasi Peak (dB μ V/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
32.623200	27.2	100.0	V	40.0	22.0	12.8	40.0
33.236800	25.9	100.0	V	30.0	22.0	14.1	40.0
41.567200	27.7	100.0	V	142.0	22.8	12.3	40.0
144.006400	36.0	201.0	H	252.0	23.0	7.5	43.5
155.252800	22.3	150.0	V	341.0	23.3	21.2	43.5
383.988000	35.8	100.0	H	-1.0	26.2	10.2	46.0

- Calculation Formula:

1. POL. H = Horizontal, POL. V = Vertical
2. QuasiPeak = Reading (Receiver Reading) + Corr.
3. Corr. (Correction Factor) = Antenna Factor + Cable Loss
4. Margin = Limit - QuasiPeak



-For Measurement Above 1 GHz

Rule Part / Standard	FCC PART 15 Subpart B Class B
Detector	Peak mode: Peak (RBW: 1 MHz, VBW: 3 MHz) CISPR-Average mode: Peak (RBW: 1 MHz, VBW: 10 Hz)
Highest Operating Frequency	5 825 MHz
Upper Frequency of Measurement Range	1 GHz to 29.125 GHz
Worst Case of USB Type	Foxlink
Operation Mode	Data Communication mode
Kind of Test Site	3 m semi anechoic chamber
Temperature	23.5 °C
Relative Humidity	46.1 %
Test Date	June 23, 2017

Frequency (MHz)	Peak (dBμV/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1176.465000	40.5	100.0	H	25.0	-13.5	33.5	74.0
1196.545000	33.0	111.7	V	91.0	-13.5	41.0	74.0
1218.285000	34.6	328.6	V	195.0	-13.4	39.4	74.0
1679.575000	40.5	367.5	H	201.0	-12.3	33.5	74.0
1718.050000	32.1	330.8	V	270.0	-12.2	41.9	74.0
1751.985000	32.9	150.1	V	195.0	-12.2	41.1	74.0

Frequency (MHz)	CAverage (dBμV/m)	Antenna Height (cm)	POL. (H/V)	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)
1176.310000	19.6	150.1	V	126.0	-13.5	34.4	54.0
1213.895000	21.0	317.5	V	201.0	-13.4	33.0	54.0
1511.185000	20.8	367.5	V	145.0	-12.6	33.2	54.0
1679.930000	31.0	367.7	H	196.0	-12.3	23.0	54.0
1704.520000	19.5	367.7	V	170.0	-12.3	34.5	54.0
1798.705000	20.5	100.0	V	165.0	-12.1	33.5	54.0

- Calculation Formula:

1. POL. H = Horizontal, POL. V = Vertical
2. Peak or CAverage = Reading (Receiver Reading) + Corr.
3. Corr. (Correction Factor) = Antenna Factor+ Cable Loss –Amplifier Gain
4. Margin = Limit - Peak or CAverage



6. LIST OF TEST EQUIPMENT

<u>Type</u>	<u>Manufacturer</u>	<u>Model Name</u>	<u>Serial Number</u>	<u>Calibration Cycle</u>	<u>CAL Date</u>
<u>Conducted Emission</u>					
<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESCI	100033	1 year	06.29.2016
<input type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESCI	100584	1 year	12.23.2016
<input checked="" type="checkbox"/> LISN	Rohde & Schwarz	ENV216	100073	1 year	12.23.2016
<input checked="" type="checkbox"/> LISN	Rohde & Schwarz	ESH3-Z5	100282	1 year	05.22.2017
<input checked="" type="checkbox"/> Software	Rohde & Schwarz	EMC32	-	-	-
<u>Radiated Emission</u>					
-For measurement below 1 GHz					
<input type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESI40	831564103	1 year	11.04.2016
<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESU40	100524	1 year	04.05.2017
<input checked="" type="checkbox"/> Trilog Antenna	Schwarzbeck	VULB9168	760	2 year	04.06.2017
<input checked="" type="checkbox"/> Antenna master	HD GmbH	MA240	240/520	N/A	-
<input checked="" type="checkbox"/> Antenna master controller	HD GmbH	HD 100	100/637	N/A	-
<input checked="" type="checkbox"/> Turn Table	EMCO	1060-2M	-	N/A	-
<input type="checkbox"/> Turn Table controller	EMCO	2090	9702-1224	N/A	-
<input type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESU 26	100241	1 year	05.16.2017
<input type="checkbox"/> Antenna master	INNCO Systems	MA4000-EP	MA4000/283	N/A	-
<input type="checkbox"/> Turn Table	INNCO Systems	DT3000-3T	DT3000/69	N/A	-
<input checked="" type="checkbox"/> Software	Rohde & Schwarz	EMC32	-	-	-
-For measurement above 1 GHz					
<input type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESI40	831564103	1 year	11.04.2016
<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESU40	100524	1 year	04.05.2017
<input type="checkbox"/> Antenna master	HD GmbH	MA240	240/520	N/A	-
<input type="checkbox"/> Antenna master controller	HD GmbH	HD 100	100/637	N/A	-
<input checked="" type="checkbox"/> Antenna master	INNCO Systems	MA4000-XP-ET	48709515	N/A	-
<input checked="" type="checkbox"/> Antenna master controller	INNCO Systems	CO 3000	CO 3000/870/ 35990515/L	N/A	-
<input checked="" type="checkbox"/> Turn Table	EMCO	1060-2M	-	N/A	-
<input checked="" type="checkbox"/> Power Amplifier	CERNEX	CBLU5183530	24348	1 year	06.01.2017
<input type="checkbox"/> Turn Table controller	EMCO	2090	9702-1224	N/A	-
<input type="checkbox"/> Power Amplifier	CERNEX	CBLU1183540	21691	1 year	07.04.2016
<input checked="" type="checkbox"/> Horn Antenna	Schwarzbeck	BBHA 9120D	296	2 year	10.12.2016
<input checked="" type="checkbox"/> Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170541	2 year	09.03.2015
<input type="checkbox"/> Power Amplifier	CERNEX	CBL18265035	21873	1 year	01.19.2017
<input checked="" type="checkbox"/> Power Amplifier	CERNEX	CBL26405040	19660	1 year	07.15.2016
<input type="checkbox"/> Horn Antenna	Schwarzbeck	BBHA 9120D	1300	2 year	08.25.2016
<input type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESU 26	100241	1 year	05.16.2017
<input type="checkbox"/> Turn Table	INNCO Systems	DT3000-3T	DT3000/69	N/A	-
<input checked="" type="checkbox"/> Software	Rohde & Schwarz	EMC32	-	-	-



7. CONCLUSION

The data collected shows that the **EUT Type: CDMA/GSM/WCDMA/LTE phone with Bluetooth, WLAN and RFID, Model: G011C, FCC ID: ZNFG011C** complies with §15.107 and §15.109 of the FCC rules.