

TEST REPORT

DT&C Co., Ltd. 42, Yurim-ro, 154Beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel : 031-321-2664, Fax : 031-321-1664	Report No : DRTFCC1510-0223 Pages:(1) / (100) page	 Dt&C
---	---	---

1. Customer

- Name : LG Electronics MobileComm U.S.A., Inc.
- Address : 1000 Sylvan Avenue, Englewood Cliffs NJ 07632

2. Use of Report : FCC Original Grant

3. Product Name (Model) : GSM/WCDMA/LTE Phone with Bluetooth, WLAN and NFC (LG-H635CX)

4. Date of Test : 2015-05-04 ~ 2015-05-15, 2015-05-30 ~ 2015-06-01, 2015-10-12 ~ 2015-10-14

5. Test Method Used: FCC Part 22, 24, 27

6. Testing Environment : See appended test report

7. Test Result : Pass Fail

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This Test Report cannot be reproduced, except in full.

Affirmation	Tested by Name : Jaejin Lee  (Signature)	Technical Manager Name : Geunki Son  (Signature)
-------------	---	---

2015 . 10 . 27 .

DT&C Co., Ltd.

Test Report Version

Test Report No.	Date	Description
DRTFCC1510-0223	Oct. 27, 2015	Initial issue ^{Note}

Note: ZNFH635CX used same hardware with ZNFH630. Just enabled the WCDMA B4 function by software. All of performance is same with ZNFH630, and used same result data.

Table of Contents

1. GENERAL INFORMATION	5
2. INTRODUCTION	6
2.1. EUT DESCRIPTION	6
2.2. Support equipment.....	6
2.3. MEASURING INSTRUMENT CALIBRATION.....	6
2.4. TEST FACILITY	6
3. DESCRIPTION OF TESTS.....	7
3.1 ERP & EIRP	7
3.2 PEAK TO AVERAGE RATIO	9
3.3 OCCUPIED BANDWIDTH.....	10
3.4 BAND EDGE EMISSIONS AT ANTENNA TERMINAL.....	11
3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	12
3.6 RADIATED SPURIOUS EMISSIONS	13
3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	14
4. LIST OF TEST EQUIPMENT.....	15
5. SUMMARY OF TEST RESULTS	16
6. SAMPLE CALCULATION	17
7. TEST DATA	19
7.1 PEAK TO AVERAGE RATIO	19
7.2 OCCUPIED BANDWIDTH.....	19
7.3 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	20
7.4 BAND EDGE	20
7.5 EQUIVALENT ISOTROPIC RADIATED POWER	21
7.6 EQUIVALENT ISOTROPIC RADIATED POWER	22
7.7 RADIATED SPURIOUS EMISSIONS	24
7.7.1 RADIATED SPURIOUS EMISSIONS (GSM850)	24
7.7.2 RADIATED SPURIOUS EMISSIONS (WCDMA850).....	25
7.7.3 RADIATED SPURIOUS EMISSIONS (HSUPA850)	26
7.7.4 RADIATED SPURIOUS EMISSIONS (WCDMA1700).....	27
7.7.5 RADIATED SPURIOUS EMISSIONS (HSUPA1700)	28
7.7.6 RADIATED SPURIOUS EMISSIONS (GSM1900)	29
7.7.7 RADIATED SPURIOUS EMISSIONS (WCDMA1900).....	30
7.7.8 RADIATED SPURIOUS EMISSIONS (HSUPA1900)	31
7.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	32
7.8.1 FREQUENCY STABILITY (GSM850)	32
7.8.2 FREQUENCY STABILITY (WCDMA850).....	33
7.8.3 FREQUENCY STABILITY (HSUPA850)	34
7.8.4 FREQUENCY STABILITY (WCDMA1700).....	35
7.8.5 FREQUENCY STABILITY (HSUPA1700)	36
7.8.6 FREQUENCY STABILITY (GSM1900)	37
7.8.7 FREQUENCY STABILITY (WCDMA1900).....	38
7.8.8 FREQUENCY STABILITY (HSUPA1900)	39



8. TEST PLOTS	40
8.1 Peak to Average Ratio.....	40
8.2 Occupied Bandwidth (99 % Bandwidth)	44
8.3 Spurious Emissions at Antenna Terminal	64
8.4 Band Edge	85

1. GENERAL INFORMATION

Applicant Name: LG Electronics MobileComm U.S.A., Inc.

Address: 1000 Sylvan Avenue, Englewood Cliffs NJ 07632

FCC ID : ZNFH635CX

FCC Classification : Licensed Portable Transmitter Held to Ear (PCE)

EUT : GSM/WCDMA/LTE Phone with Bluetooth, WLAN and NFC

Models Name : LG-H635CX

Add Model Name : LGH635CX, H630CX, LG-H635cx, LGH635cx, H635cx

Supplying power : Standard Battery
 - Type: Li-ion Battery
 - M/N: BL-51YF
 - Rating: DC 3.85V

Antenna Information : Internal Antenna
 - Type: Built-In type

Mode	Tx Frequency (MHz)	Emission Designator	ERP/EIRP	
			Max. Power (W)	Max. Power (dBm)
GSM850	824.2 ~ 848.8 MHz	248KGXW	1.000 W	30.00 dBm
EDGE850	824.2 ~ 848.8 MHz	248KG7W	0.164 W	22.14 dBm
WCDMA850	826.4 ~ 846.6 MHz	4M17F9W	0.135 W	21.30 dBm
HSUPA850	826.4 ~ 846.6 MHz	4M18F9W	0.101 W	20.05 dBm
WCDMA1700	1712.4 ~ 1752.6 MHz	4M19F9W	0.380 W	25.80 dBm
HSUPA1700	1712.4 ~ 1752.6 MHz	4M18F9W	0.305 W	24.85 dBm
GSM1900	1850.2 ~ 1909.8 MHz	247KGXW	1.288 W	31.10 dBm
EDGE1900	1850.2 ~ 1909.8 MHz	247KG7W	0.280 W	24.47 dBm
WCDMA1900	1852.4 ~ 1907.6 MHz	4M19F9W	0.258 W	24.12 dBm
HSUPA1900	1852.4 ~ 1907.6 MHz	4M19F9W	0.200 W	23.02 dBm

2. INTRODUCTION

2.1. EUT DESCRIPTION

The Equipment Under Test(EUT) supports GSM/WCDMA/LTE Phone with Bluetooth 4.0 LE, WIFI 802.11b/g/n(2.4GHz), NFC

2.2. Support equipment

Equipment	Model No.	Serial No.	Manufacturer	Note
-	-	-	-	-
-	-	-	-	-

Note: The above equipment were supported by manufacturer.

2.3. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.4. TEST FACILITY

The 3m test site and conducted measurement facility used to collect the radiated data are located at the 42, Yurim-ro, 154beon-gil, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea 449-935. The site is constructed in conformance with the requirements.


- 3m test site registration Number: 165783

3. DESCRIPTION OF TESTS

3.1 ERP & EIRP

(Effective Radiated Power & Equivalent Isotropic Radiated Power)

Test Set-up

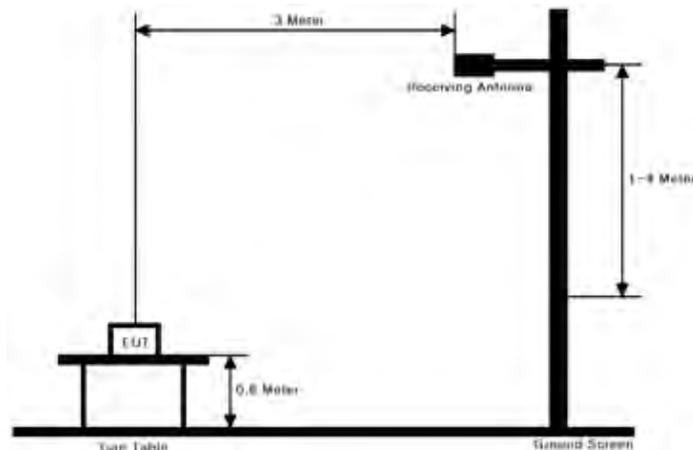

Test Procedure

- ANSI/TIA-603-C-2004 - Section 2.2.17
- KDB971168 v02r02 - Section 5.2.1

These measurements were performed at 3 & 10 m test site. The equipment under test is placed on a non-conductive table 0.8-meters above a turntable which is flush with the ground plane and 3 meters from the receive antenna.

Test setting

1. Set span to at least 1.5 times the OBW.
2. Set RBW = 1-5 % of the OBW, not to exceed 1 MHz.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time = auto couple.
6. Detector = RMS (power averaging).
7. If the EUT can be configured to transmit continuously (i.e., burst duty cycle ≥ 98 %), then set the trigger to free run.
8. If the EUT cannot be configured to transmit continuously (i.e., burst duty cycle < 98 %), then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep.
Ensure that the sweep time is less than or equal to the transmission burst duration.
9. Trace average at least 100 traces in power averaging (i.e., RMS) mode.
10. Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with the band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminal of the substitute antenna is measured.


The ERP/EIRP is calculated using the following formula:

ERP/EIRP = The conducted power at the substitute antenna's terminal [dBm] + Substitute Antenna gain [dBd for ERP , dBi for EIRP]

For readings above 1 GHz, the above procedure is repeated using horn antennas and the difference between the gain of the horn antenna and an isotropic antenna are taken into consideration.

3.2 PEAK TO AVERAGE RATIO

Test set-up

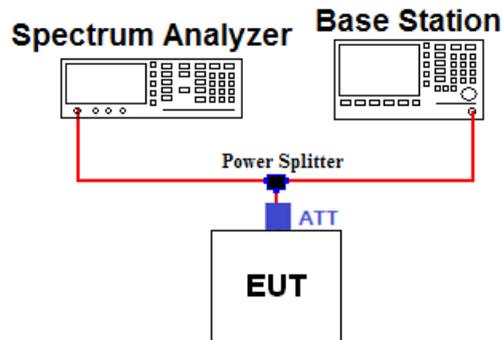

Test Procedure

A peak to average ratio measurement is performed using the following procedure.


■ CCDF Procedure

- KDB971168 v02r02-Section 5.7.1

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth
2. Set the number of counts to a value that stabilizes the measured CCDF curve
3. Set the measurement interval as follows:
 - 1) For continuous transmissions, set to 1 ms
 - 2) For burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1%

3.3 OCCUPIED BANDWIDTH.

Test set-up

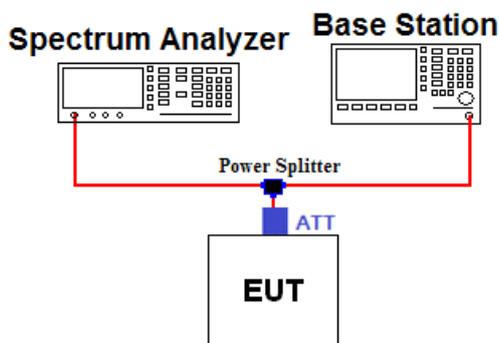

Offset value information

Frequency (MHz)	Offset Value (dB)	Frequency (MHz)	Offset Value (dB)
824.2	18.72	1752.6	18.83
826.4	18.71	1850.2	18.97
836.6	18.76	1852.4	18.97
846.6	18.78	1880.0	19.04
848.8	18.80	1907.6	19.06
1712.4	18.76	1909.8	19.06
1732.4	18.81		

Note. 1: The offset values from EUT to Spectrum analyzer were measured and used for test.
 Offset value = Cable A + Splitter + ATT + Cable B

Test Procedure

- KDB971168 v02r02-Section 4.2


The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power of a given emission.

Test setting

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 ~ 5 % of the expected OBW & VBW ≥ 3 X RBW
3. Detector = Peak
4. Trance mode = Max hold
5. Sweep = Auto couple
6. The trace was allowed to stabilize
7. If necessary, step 2 ~ 6 were repeated after changing the RBW such that it would be within 1 ~ 5 % of the 99 % occupied bandwidth observed in step 6.

3.4 BAND EDGE EMISSIONS AT ANTENNA TERMINAL.

Test set-up

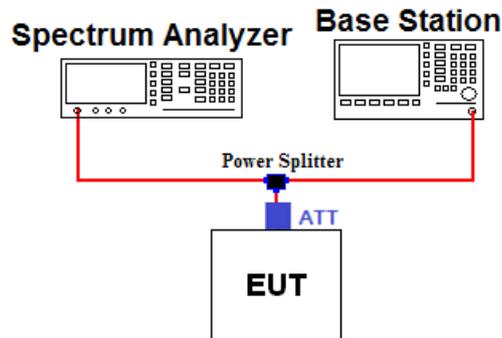

Offset value information

Frequency (MHz)	Offset Value (dB)	Frequency (MHz)	Offset Value (dB)
823.0	18.71	1755.0	18.85
824.0	18.72	1756.0	18.86
849.0	18.81	1849.0	18.96
850.0	18.81	1850.0	18.98
1709.0	18.74	1910.0	19.07
1710.0	18.74	1911.0	19.07

Note. 1: The offset value from EUT to Spectrum analyzer was measured and used for test.
Offset value = Cable A + Splitter + ATT + Cable B

Test Procedure

- KDB971168 v02r02 - Section 6.0

All out of band emissions are measured by means of a calibrated spectrum analyzer. The EUT was setup to maximum output power at its lowest and highest channel with all modulations.

The power of any spurious emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB


Test setting

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW $\geq 1\%$ of the emission
4. VBW $\geq 3 \times$ RBW
5. Detector = RMS & Trace mode = Max hold
6. Sweep time = Auto couple or 1 s for band edge
7. Number of sweep point $\geq 2 \times$ span / RBW
8. The trace was allowed to stabilize

Note 1: In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of **at least one percent** of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.

Test set-up

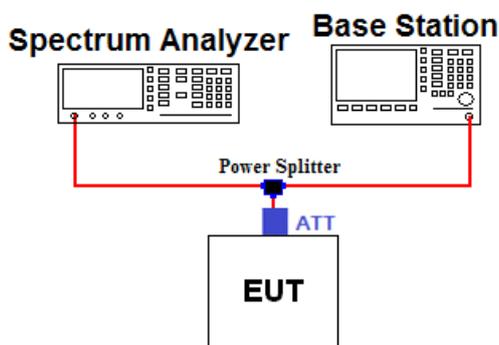

Offset value information

Frequency (MHz)	Offset Value (dB)	Frequency (MHz)	Offset Value (dB)
5000.0	20.05	15000.0	21.49
10000.0	20.74	20000.0	22.13
-	-	-	-

Note. 1: The offset value from EUT to Spectrum analyzer was measured and used for test.
 Offset value = Cable A + Splitter +ATT+ Cable B

Test Procedure

- KDB971168 v02r02 - Section 6.0

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The EUT was setup to maximum output power at its low, middle, high channel with all bandwidths. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

The power of any spurious emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB


Test setting

1. RBW = 100 KHz or 1 MHz & VBW ≥ 3 X RBW (Refer to Note 1)
2. Detector = RMS & Trace mode = Max hold
3. Sweep time = Auto couple
4. Number of sweep point ≥ 2 X span / RBW
5. The trace was allowed to stabilize

Note 1: Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for Part 22 and 1 MHz or greater for Part 24, 27.

3.6 RADIATED SPURIOUS EMISSIONS

Test Set-up

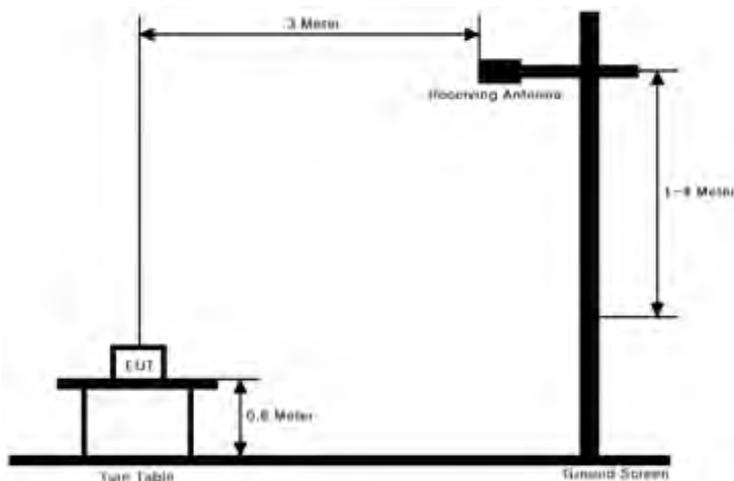

Test Procedure

- ANSI/TIA-603-C-2004 - Section 2.2.12
- KDB971168 v02r02 - Section 5.8

These measurements were performed at 3 & 10m test site. The equipment under test is placed on a non-conductive table 0.8-meters above a turntable which is flush with the ground plane and 3 meters from the receive antenna.

Test setting

1. RBW = 100 kHz for below 1 GHz and 1 MHz for above 1 GHz / VBW \geq 3 X RBW
2. Detector = Peak & Trace mode = Max hold
3. Sweep time = Auto couple
4. Number of sweep point \geq 2 X span / RBW
5. The trace was allowed to stabilize

The receive antenna height and turntable rotations were adjusted for the highest reading on the receive spectrum analyzer.


For radiated power measurements below 1 GHz, a half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading.

For radiated power measurements above 1 GHz, a Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same spectrum analyzer reading. The difference between the gain of the horn and an isotropic antenna are taken into consideration.

This measurement was performed with the EUT oriented in 3 orthogonal axis.

3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

Test Set-up

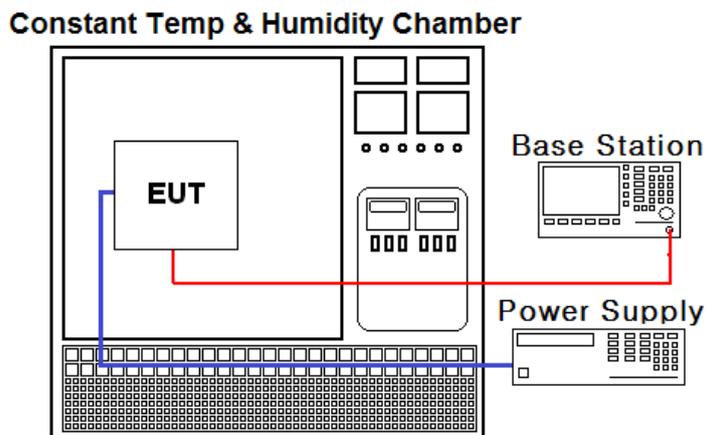

Test Procedure

- ANSI/TIA-603-C-2004
- KDB971168 v02r02 - Section 9.0

The frequency stability of the transmitter is measured by:

a.) Temperature:

The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.

b.) Primary Supply Voltage:

The primary supply voltage is varied from 85 % to 115 % of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification:

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block for Part 24, 27. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ (± 2.5 ppm) of the center frequency for Part 22.

Time Period and Procedure:

1. The carrier frequency of the transmitter is measured at room temperature.
(25 °C to provide a reference)
2. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C.
A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

4. LIST OF TEST EQUIPMENT

Type	Manufacturer	Model	Cal.Date (yy/mm/dd)	Next.Cal. Date (yy/mm/dd)	S/N
MXA Signal Analyzer	Agilent Technologies	N9020A	15/01/19	16/01/19	MY46471096
MXA Signal Analyzer	Agilent Technologies	N9020A	15/08/18	16/08/18	MY50200867
Dynamic Measurement DC Source	Agilent Technologies	66332A	15/01/22	16/01/22	GB37470200
Temp & Humi Test Chamber	SJ Science	SJ-TH-S50	14/10/21	15/10/21	SJ-TH-S50-130930
Signal Generator	Rohde Schwarz	SMF100A	15/06/29	16/06/29	102341
8960 Series 10 Wireless Comms Test Set	Agilent Technologies	E5515C	15/05/25	16/05/25	GB43461134
Power Splitter	Anritsu	K241B	14/10/21	15/10/21	1701061
2W 3dB Attenuator	SMAJK	SMAJK-2-3	14/10/21	15/10/21	3
50W 10dB Attenuator	SMAJK	SMAJK-50-10	14/10/21	15/10/21	2-50-10
Thermohyrometer	BODYCOM	BJ5478	15/02/26	16/02/26	1209
Multimeter	Agilent Technologies	34401A	15/01/06	16/01/06	MY41037027
Vector Signal Generator	Rohde Schwarz	SMBV100A	15/01/06	16/01/06	255571
Loop Antenna	Schwarzbeck	FMZB1513	14/04/29	16/04/29	1513-128
TRILOG Broadband Test-Antenna	SCHWARZBECK	VULB 9160	14/04/04	16/04/04	3357
Dipole Antenna	Schwarzbeck	VHA9103	13/10/24	15/10/24	2116
Dipole Antenna	Schwarzbeck	VHA9103	14/04/01	16/04/01	2117
Dipole Antenna	Schwarzbeck	UHA9105	13/10/24	15/10/24	2261
Dipole Antenna	Schwarzbeck	UHA9105	14/04/01	16/04/01	2262
HORN ANT	ETS	3115	15/02/09	17/02/09	00021097
HORN ANT	ETS	3117	14/05/12	16/05/12	140394
Low Noise Pre Amplifier	TSJ	MLA-010K01-B01-27	15/04/09	16/04/09	1844538
Amplifier	EMPOWER	BBS3Q7ELU	15/09/09	16/09/09	1020
Amplifier (30dB)	Agilent	8449B	14/11/06	15/11/06	3008A02108
High-pass filter	Wainwright	WHKX12-935-1000-15000-40SS	15/09/23	16/09/23	7
High-pass filter	Wainwright	WHKX12-2580-3000-18000-80SS	15/09/23	16/09/23	3

5. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Parameter	Test Limit	Status Note 1
2.1046	Conducted Output Power	N/A	C Note 2
22.917(a) 24.238(a) 2.1049	Occupied Bandwidth	N/A	C
27.50(d.4)	Equivalent Isotropic Radiated Power	< 1 Watts max. ERP	C
2.1051 27.53(h)	Band Edge Spurious and Harmonic Emissions at Antenna Terminal	> 43 + 10log ₁₀ (P) dB at Band edge and for all out-of-band emissions	C
27.50(d)	Peak to Average Ratio	< 13 dB	C
2.1053 27.53(h)	Radiated Spurious and Harmonic Emissions	> 43 + 10log ₁₀ (P) dB for all out-of-band emissions	C
2.1055 27.54	Frequency Stability	Fundamental emissions must stay within Authorized frequency block	C
<p>Note 1: C=Comply NC=Not Comply NT=Not Tested NA=Not Applicable</p> <p>Note 2: Refer to RF Exposure Report (Test Report_SAR)</p> <p>Note 3: This test report data was reused ZNFH630 for band 2 and 5 (Test report number: DRTFCC1505-0101(1), FCC ID: ZNFH630) WCDMA1700 band was enabled by software from ZNFH630</p>			

The sample was tested according to the following specification:
ANSI/TIA/EIA-603-C-2004 and KDB 971168 D01 v02r02

6. SAMPLE CALCULATION

A. Emission Designator

GSM850 Emission Designator

Emission Designator = **248KGXW**
 GSM OBW = 248.06 kHz
 (Measured at the 99.75 % power bandwidth)
 G = Phase Modulation
 X = Cases not otherwise covered
 W = Combination (Audio/Data)

WCDMA850 Emission Designator

Emission Designator = **4M17F9W**
 WCDMA OBW = 4.1728 MHz
 (Measured at the 99.75 % power bandwidth)
 F = Frequency Modulation
 9 = Composite Digital Information
 W = Combination (Audio/Data)

GSM1900 Emission Designator

Emission Designator = **247KGXW**
 GSM OBW = 247.02 kHz
 (Measured at the 99.75 % power bandwidth)
 G = Phase Modulation
 X = Cases not otherwise covered
 W = Combination (Audio/Data)

WCDMA1900 Emission Designator

Emission Designator = **4M19F9W**
 WCDMA OBW = 4.1906 MHz
 (Measured at the 99.75 % power bandwidth)
 F = Frequency Modulation
 9 = Composite Digital Information
 W = Combination (Audio/Data)

WCDMA1700 Emission Designator

Emission Designator = **4M19F9W**
 WCDMA OBW = 4.1940 MHz
 (Measured at the 99.75 % power bandwidth)
 F = Frequency Modulation
 9 = Composite Digital Information
 W = Combination (Audio/Data)

EDGE850 Emission Designator

Emission Designator = **248KG7W**
 GSM OBW = 248.45 kHz
 (Measured at the 99.75 % power bandwidth)
 G = Phase Modulation
 7 = Two or more channels containing
 quantized or digital information
 W = Combination (Audio/Data)

HSUPA850 Emission Designator

Emission Designator = **4M18F9W**
 HSUPA OBW = 4.1762 MHz
 (Measured at the 99.75 % power bandwidth)
 F = Frequency Modulation
 9 = Composite Digital Information
 W = Combination (Audio/Data)

EDGE1900 Emission Designator

Emission Designator = **247KG7W**
 GSM OBW = 247.43 kHz
 (Measured at the 99.75 % power bandwidth)
 G = Phase Modulation
 7 = Two or more channels containing
 quantized or digital information
 W = Combination (Audio/Data)

HSUPA1900 Emission Designator

Emission Designator = **4M19F9W**
 HSUPA OBW = 4.1855 MHz
 (Measured at the 99.75 % power bandwidth)
 F = Frequency Modulation
 9 = Composite Digital Information
 W = Combination (Audio/Data)

HSUPA1700 Emission Designator

Emission Designator = **4M18F9W**
 WCDMA OBW = 4.1840 MHz
 (Measured at the 99.75 % power bandwidth)
 F = Frequency Modulation
 9 = Composite Digital Information
 W = Combination (Audio/Data)

B. EIRP Sample Calculation

MODE	Ch./ Freq		Spectrum Reading	EUT Axis	Ant Pol (H/V)	Level(dBm)	TX Ant Gain(dBi)	Result	
	channel	Freq.(MHz)	Value(dBm)			@ Ant Terminal		(dBm)	(W)
WCDMA1700	1412	1732.4	-16.83	X	H	16.92	8.88	25.80	0.380

EIRP = @ Ant Terminal LEVEL(dBm) + Ant. Gain

- 1) The EUT mounted on a non-conductive turntable is 0.8 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain is the rating of effective isotropic radiated power (EIRP).

7. TEST DATA

7.1 PEAK TO AVERAGE RATIO

- Plots of the EUT's Peak- to- Average Ratio are shown in Clause 8.1

7.2 OCCUPIED BANDWIDTH

Band	Channel	Frequency	Test Result (kHz)
GSM850	128	824.2	248.06
	190	836.6	242.24
	251	848.8	246.00
EDGE850	128	824.2	247.66
	190	836.6	245.67
	251	848.8	248.45
WCDMA850	4132	826.4	4151.80
	4183	836.6	4171.00
	4233	846.6	4172.80
HSUPA850	4132	826.4	4161.40
	4183	836.6	4163.00
	4233	846.6	4176.20
WCDMA1700	1312	1712.40	4167.80
	1412	1732.40	4194.00
	1513	1752.60	4156.60
HSUPA1700	1312	1712.40	4184.00
	1412	1732.40	4157.30
	1513	1752.60	4170.20
GSM1900	512	1850.2	246.58
	661	1880.0	246.80
	810	1909.8	247.02
EDGE1900	512	1850.2	240.73
	661	1880.0	247.43
	810	1909.8	247.39
WCDMA1900	512	1850.2	4190.60
	661	1880.0	4175.50
	810	1909.8	4167.30
HSUPA1900	9262	1852.4	4175.40
	9400	1880.0	4170.60
	9538	1907.6	4185.50

- Plots of the EUT's Occupied Bandwidth are shown in Clause 8.2

7.3 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

- Plots of the EUT's Conducted Spurious Emissions are shown in Clause 8.3

7.4 BAND EDGE

- Plots of the EUT's Band Edge are shown in Clause 8.4

7.5 EQUIVALENT ISOTROPIC RADIATED POWER

- GSM850

CH.	EUT Position (Axis)	Test mode						
		Pol. (H/V)	LEVEL@ TX ANTENNA TERMINAL (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Rated Voltage	Note.
824.2 128	X	H	28.56	1.23	29.79	0.953	DC 3.85V	GSM
836.6 190	X	H	27.13	1.17	28.30	0.676	DC 3.85V	GSM
848.8 251	X	H	28.89	1.11	30.00	1.000	DC 3.85V	GSM
848.8 251	X	H	21.03	1.11	22.14	0.164	DC 3.85V	EDGE

- WCDMA850 data

CH.	EUT Position (Axis)	Test mode 12.2 kbps RMC						
		Pol. (H/V)	LEVEL@ TX ANTENNA TERMINAL (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Rated Voltage	Note.
826.4 4132	X	H	19.22	1.22	20.44	0.111	DC 3.85V	-
836.6 4183	X	H	18.76	1.17	19.93	0.098	DC 3.85V	-
846.6 4233	X	H	20.18	1.12	21.30	0.135	DC 3.85V	-

- HSUPA850 data

CH.	EUT Position (Axis)	Test mode subtest 1						
		Pol. (H/V)	LEVEL@ TX ANTENNA TERMINAL (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)	Rated Voltage	Note.
826.4 4132	X	H	18.49	1.22	19.71	0.094	DC 3.85V	-
836.6 4183	X	H	17.89	1.17	19.06	0.081	DC 3.85V	-
846.6 4233	X	H	18.93	1.12	20.05	0.101	DC 3.85V	-

NOTES:

This EUT was tested under all configurations and the highest power is reported in GSM mode and WCDMA mode with HSDPA inactive at 12.2 kbps RMC and TPC bits set to "1" and HSUPA mode with 12.2 kbps + HSPA and subtest 1 and in GSM mode using a Power Control Level of "0" in PCS Band and "5" in the Cellular Band. This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

7.6 EQUIVALENT ISOTROPIC RADIATED POWER

- WCDMA1700 data

CH.	EUT Position (Axis)	Test mode 12.2 kbps RMC						
		Pol. (H/V)	LEVEL@ TX ANTENNA TERMINAL (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Rated Voltage	Note.
1712.40 1312	X	H	16.29	8.86	25.15	0.327	DC 3.85V	-
1732.40 1412	X	H	16.92	8.88	25.80	0.380	DC 3.85V	-
1752.60 1513	X	H	16.23	8.90	25.13	0.326	DC 3.85V	-

- HSUPA1700 data

CH.	EUT Position (Axis)	Test mode subtest 1						
		Pol. (H/V)	LEVEL@ TX ANTENNA TERMINAL (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Rated Voltage	Note.
1712.40 1312	X	H	14.92	8.86	23.78	0.239	DC 3.85V	-
1732.40 1412	X	H	15.97	8.88	24.85	0.305	DC 3.85V	-
1752.60 1513	X	H	15.40	8.90	24.30	0.269	DC 3.85V	-

- GSM1900 data

CH.	EUT Position (Axis)	Test mode						
		Pol. (H/V)	LEVEL@ TX ANTENNA TERMINAL (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Rated Voltage	Note.
1850.2 512	X	H	21.35	9.01	30.36	1.086	DC 3.85V	GSM
1880.0 661	X	H	21.85	9.05	30.90	1.230	DC 3.85V	GSM
1909.80 810	X	H	22.02	9.08	31.10	1.288	DC 3.85V	GSM
1909.80 810	X	H	15.39	9.08	24.47	0.280	DC 3.85V	EDGE

- WCDMA1900 data

CH.	EUT Position (Axis)	Test mode 12.2 kbps RMC						
		Pol. (H/V)	LEVEL@ TX ANTENNA TERMINAL (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Rated Voltage	Note.
1852.4 9262	X	H	12.92	9.01	21.93	0.156	DC 3.85V	-
1880.0 9400	X	H	13.95	9.05	23.00	0.200	DC 3.85V	-
1907.6 9538	X	H	15.04	9.08	24.12	0.258	DC 3.85V	-

- HSUPA1900 data

CH.	EUT Position (Axis)	Test mode subtest 1						
		Pol. (H/V)	LEVEL@ TX ANTENNA TERMINAL (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)	Rated Voltage	Note.
1852.4 9262	X	H	11.14	9.01	20.15	0.104	DC 3.85V	-
1880.0 9400	X	H	12.75	9.05	21.80	0.151	DC 3.85V	-
1907.6 9538	X	H	13.94	9.08	23.02	0.200	DC 3.85V	-

NOTES:

This EUT was tested under all configurations and the highest power is reported in GSM mode and WCDMA mode with HSDPA inactive at 12.2 kbps RMC and TPC bits set to "1" and HSUPA mode with 12.2 kbps + HSPA and subtest 1 and in GSM mode using a Power Control Level of "0" in PCS Band and "5" in the Cellular Band. This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

7.7 RADIATED SPURIOUS EMISSIONS

7.7.1 RADIATED SPURIOUS EMISSIONS (GSM850)

Channel (ERP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	LEVEL@ ANTENNA TERMINAL (dBm)	Substitute Antenna Gain (dBd)	Correct Generator Level (dBm)	Result (dBc)	Limit (dBc)
128 (0.953 W)	1648.48	X	H	-38.90	6.64	-32.26	62.05	42.79
	2472.59	Y	V	-31.49	7.58	-23.91	53.70	
	3296.69	X	H	-47.61	7.79	-39.82	69.61	
	4121.11	X	H	-32.44	7.76	-24.68	54.47	
190 (0.676 W)	1673.07	X	H	-38.66	6.66	-32.00	60.30	41.30
	2510.16	Y	V	-28.91	7.61	-21.30	49.60	
	3346.67	X	H	-45.86	7.83	-38.03	66.33	
	4183.36	X	H	-35.52	7.91	-27.61	55.91	
251 (1.000 W)	1697.65	X	H	-43.29	6.69	-36.60	66.60	43.00
	2546.09	Y	V	-34.81	7.60	-27.21	57.21	
	3395.47	X	H	-49.29	7.87	-41.42	71.42	
	4244.39	X	H	-37.00	8.06	-28.94	58.94	

- Limit Calculation= $43 + 10 \log_{10}(ERP [W])$ [dBc]

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

This EUT was tested under all configurations and the highest power is reported in GSM mode and WCDMA mode with HSDPA inactive at 12.2 kbps RMC and TPC bits set to "1" and HSUPA mode with 12.2 kbps + HSPA and subtest 1 and in GSM mode using a Power Control Level of "0" in PCS Band and "5" in the Cellular Band. This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

7.7.2 RADIATED SPURIOUS EMISSIONS (WCDMA850)

Channel (ERP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	LEVEL@ ANTENNA TERMINAL (dBm)	Substitute Antenna Gain (dBd)	Correct Generator Level (dBm)	Result (dBc)	Limit (dBc)
4132 (0.111 W)	1650.62	X	H	-50.01	6.64	-43.37	63.81	33.44
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
4183 (0.098 W)	1671.28	X	H	-50.51	6.66	-43.85	63.78	32.93
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
4233 (0.135 W)	1691.20	X	H	-51.81	6.68	-45.13	66.43	34.30
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	

- Limit Calculation= $43 + 10 \log_{10}(ERP [W])$ [dBc]

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

This EUT was tested under all configurations and the highest power is reported in GSM mode and WCDMA mode with HSDPA inactive at 12.2 kbps RMC and TPC bits set to "1" and HSUPA mode with 12.2 kbps + HSPA and subtest 1 and in GSM mode using a Power Control Level of "0" in PCS Band and "5" in the Cellular Band. This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

7.7.3 RADIATED SPURIOUS EMISSIONS (HSUPA850)

Channel (ERP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	LEVEL@ ANTENNA TERMINAL (dBm)	Substitute Antenna Gain (dBd)	Correct Generator Level (dBm)	Result (dBc)	Limit (dBc)
4132 (0.094 W)	1660.03	X	H	-51.32	6.64	-44.68	64.39	32.71
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
4183 (0.081 W)	1675.06	X	H	-52.07	6.67	-45.40	64.46	32.06
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
4233 (0.101 W)	1691.43	X	H	-51.89	6.68	-45.21	65.26	33.05
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	

- Limit Calculation= $43 + 10 \log_{10}(ERP [W])$ [dBc]

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

This EUT was tested under all configurations and the highest power is reported in GSM mode and WCDMA mode with HSDPA inactive at 12.2 kbps RMC and TPC bits set to "1" and HSUPA mode with 12.2 kbps + HSPA and subtest 1 and in GSM mode using a Power Control Level of "0" in PCS Band and "5" in the Cellular Band. This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

7.7.4 RADIATED SPURIOUS EMISSIONS (WCDMA1700)

Channel (EIRP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	LEVEL@ ANTENNA TERMINAL (dBm)	Substitute Antenna Gain (dBi)	Correct Generator Level (dBm)	Result (dBc)	Limit (dBc)
1312 (0.327 W)	3422.88	X	H	-54.72	10.04	-44.68	69.83	38.15
	5134.32	X	H	-50.75	10.74	-40.01	65.16	
1412 (0.380 W)	3462.58	X	H	-55.71	10.08	-45.63	71.43	38.80
	5193.78	X	H	-53.47	10.77	-42.70	68.50	
1513 (0.326 W)	3507.36	X	H	-56.34	10.10	-46.24	71.37	38.13
	5261.18	X	H	-55.62	10.79	-44.83	69.96	

- Limit Calculation= $43 + 10 \log_{10}(\text{EIRP [W]})$ [dBc]

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

This EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA inactive at 12.2 kbps RMC and TPC bits set to "1" and HSUPA mode with 12.2 kbps + HSPA and subtest 1.

This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

7.7.5 RADIATED SPURIOUS EMISSIONS (HSUPA1700)

Channel (EIRP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	LEVEL@ ANTENNA TERMINAL (dBm)	Substitute Antenna Gain (dBi)	Correct Generator Level (dBm)	Result (dBc)	Limit (dBc)
1312 (0.239 W)	3423.64	X	H	-56.10	10.04	-46.06	69.84	36.78
	5136.44	X	H	-51.99	10.74	-41.25	65.03	
1412 (0.305 W)	3463.88	X	H	-57.15	10.08	-47.07	71.92	37.85
	5196.48	X	H	-55.20	10.77	-44.43	69.28	
1513 (0.269 W)	3506.90	X	H	-57.45	10.10	-47.35	71.65	37.30
	5257.64	X	H	-56.04	10.79	-45.25	69.55	

- Limit Calculation= $43 + 10 \log_{10}(\text{EIRP [W]})$ [dBc]

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

This EUT was tested under all configurations and the highest power is reported in WCDMA mode with HSDPA inactive at 12.2 kbps RMC and TPC bits set to "1" and HSUPA mode with 12.2 kbps + HSPA and subtest 1.

This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

7.7.6 RADIATED SPURIOUS EMISSIONS (GSM1900)

Channel (EIRP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	LEVEL@ ANTENNA TERMINAL (dBm)	Substitute Antenna Gain (dBi)	Correct Generator Level (dBm)	Result (dBc)	Limit (dBc)
512 (1.086 W)	5550.67	X	V	-29.33	10.98	-18.35	48.71	43.36
	7400.96	Y	H	-42.92	11.55	-31.37	61.73	
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
661 (1.230 W)	5639.94	X	V	-32.86	11.11	-21.75	52.65	43.90
	7519.94	Y	H	-42.33	11.51	-30.82	61.72	
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
810 (1.288 W)	5729.42	X	V	-37.24	11.24	-26.00	57.10	44.10
	7639.08	Y	H	-43.47	11.46	-32.01	63.11	
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	

- Limit Calculation = $43 + 10 \log_{10}(\text{EIRP [W]})$ [dBc]

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

This EUT was tested under all configurations and the highest power is reported in GSM mode and WCDMA mode with HSDPA inactive at 12.2 kbps RMC and TPC bits set to “1” and HSUPA mode with 12.2 kbps + HSPA and subtest 1 and in GSM mode using a Power Control Level of “0” in PCS Band and “5” in the Cellular Band. This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

7.7.7 RADIATED SPURIOUS EMISSIONS (WCDMA1900)

Channel (EIRP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	LEVEL@ ANTENNA TERMINAL (dBm)	Substitute Antenna Gain (dBi)	Correct Generator Level (dBm)	Result (dBc)	Limit (dBc)
9262 (0.156 W)	3706.06	X	H	-51.51	9.91	-41.60	63.53	34.93
	5553.80	X	V	-48.63	10.98	-37.65	59.58	
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
9400 (0.200 W)	3760.14	X	H	-55.68	9.86	-45.82	68.82	36.00
	5636.41	X	V	-49.06	11.10	-37.96	60.96	
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
9538 (0.258 W)	3812.99	X	H	-56.17	9.80	-46.37	70.49	37.12
	5719.57	X	V	-50.87	11.23	-39.64	63.76	
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	

- Limit Calculation = $43 + 10 \log_{10}(\text{EIRP [W]})$ [dBc]

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

This EUT was tested under all configurations and the highest power is reported in GSM mode and WCDMA mode with HSDPA inactive at 12.2 kbps RMC and TPC bits set to "1" and HSUPA mode with 12.2 kbps + HSPA and subtest 1 and in GSM mode using a Power Control Level of "0" in PCS Band and "5" in the Cellular Band. This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.

The worst case data is reported.

7.7.8 RADIATED SPURIOUS EMISSIONS (HSUPA1900)

Channel (EIRP)	Freq. (MHz)	EUT Position (Axis)	POL (H/V)	LEVEL@ ANTENNA TERMINAL (dBm)	Substitute Antenna Gain (dBi)	Correct Generator Level (dBm)	Result (dBc)	Limit (dBc)
9262 (0.104 W)	3706.29	Z	H	-52.18	9.91	-42.27	62.42	33.15
	5553.48	Z	V	-49.09	10.98	-38.11	58.26	
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
9400 (0.151 W)	3757.48	Z	H	-56.90	9.86	-47.04	68.84	34.80
	5643.36	Z	V	-49.85	11.12	-38.73	60.53	
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	
9538 (0.200 W)	3812.61	Z	H	-56.79	9.80	-46.99	70.01	36.02
	5719.09	Z	V	-50.63	11.23	-39.40	62.42	
	-	-	-	-	-	-	-	
	-	-	-	-	-	-	-	

- Limit Calculation = $43 + 10 \log_{10}(\text{EIRP [W]})$ [dBc]

- No other spurious and harmonic emissions were reported greater than listed emissions above table.

NOTES:

This EUT was tested under all configurations and the highest power is reported in GSM mode and WCDMA mode with HSDPA inactive at 12.2 kbps RMC and TPC bits set to "1" and HSUPA mode with 12.2 kbps + HSPA and subtest 1 and in GSM mode using a Power Control Level of "0" in PCS Band and "5" in the Cellular Band. This EUT was tested with the fully charged battery. Also, we have done x, y, z planes in EUT and horizontal and vertical polarization of detecting antenna.


The worst case data is reported.

7.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

7.8.1 FREQUENCY STABILITY (GSM850)

OPERATING FREQUENCY : 836,600,000 Hz
 CHANNEL : 190(Mid)
 REFERENCE VOLTAGE : 3.85 V DC
 DEVIATION LIMIT : $\pm 0.00025\%$ or 2.5 ppm


VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(ppm)	(%)
100%	3.85	+25(Ref)	836,600,012	0.014	0.00000143
100%		-30	836,600,014	0.017	0.00000167
100%		-20	836,600,003	0.004	0.00000036
100%		-10	836,600,015	0.018	0.00000179
100%		0	836,600,005	0.006	0.00000060
100%		+10	836,600,010	0.012	0.00000120
100%		+20	836,600,004	0.005	0.00000048
100%		+30	836,600,010	0.012	0.00000120
100%		+40	836,600,009	0.011	0.00000108
100%		+50	836,600,009	0.011	0.00000108
115%	4.43	+25	836,600,004	0.005	0.00000048
BATT.ENDPOINT	2.90	+25	836,600,005	0.006	0.00000060

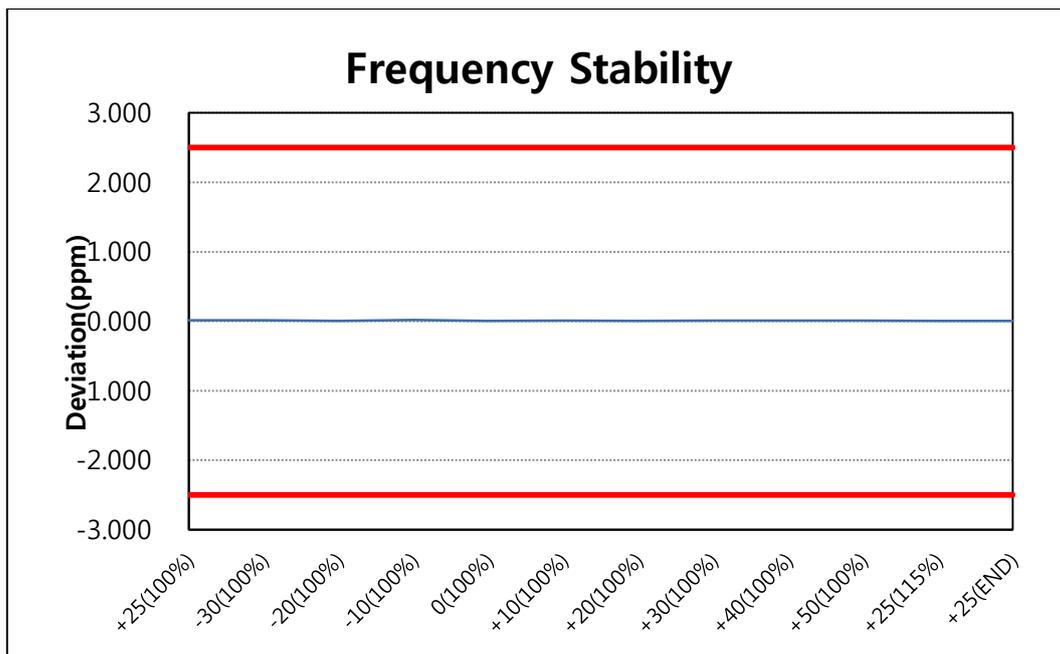

7.8.2 FREQUENCY STABILITY (WCDMA850)

OPERATING FREQUENCY : 836,000,000 Hz
 CHANNEL : 4183(Mid)
 REFERENCE VOLTAGE : 3.85 V DC
 DEVIATION LIMIT : ± 0.00025 % or 2.5 ppm


VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(ppm)	(%)
100%	3.85	+25(Ref)	836,599,998	-0.002	-0.00000024
100%		-30	836,600,004	0.005	0.00000048
100%		-20	836,600,003	0.004	0.00000036
100%		-10	836,600,003	0.004	0.00000036
100%		0	836,600,004	0.005	0.00000048
100%		+10	836,600,001	0.001	0.00000012
100%		+20	836,599,999	-0.001	-0.00000012
100%		+30	836,600,002	0.002	0.00000024
100%		+40	836,600,002	0.002	0.00000024
100%		+50	836,600,004	0.005	0.00000048
115%	4.43	+25	836,600,003	0.004	0.00000036
BATT.ENDPOINT	2.90	+25	836,600,005	0.006	0.00000060

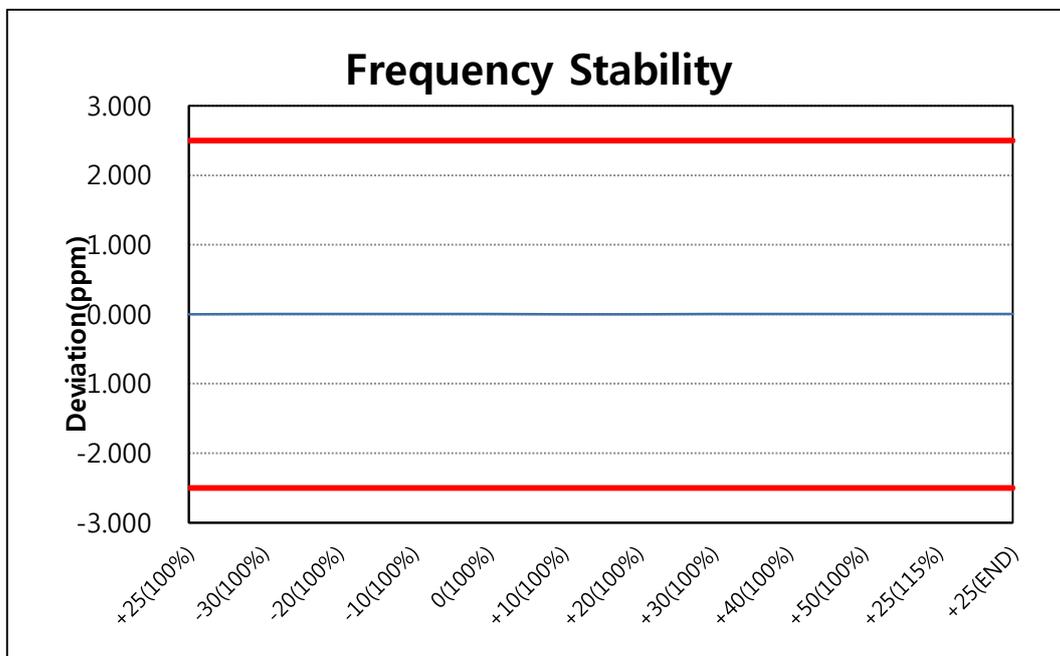

7.8.3 FREQUENCY STABILITY (HSUPA850)

OPERATING FREQUENCY : 836,600,000 Hz
 CHANNEL : 4183(Mid)
 REFERENCE VOLTAGE : 3.85 V DC
 DEVIATION LIMIT : ± 0.00025 % or 2.5 ppm


VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(ppm)	(%)
100%	3.85	+25(Ref)	836,600,003	0.004	0.00000036
100%		-30	836,600,003	0.004	0.00000036
100%		-20	836,600,002	0.002	0.00000024
100%		-10	836,599,999	-0.001	-0.00000012
100%		0	836,599,996	-0.005	-0.00000048
100%		+10	836,600,003	0.004	0.00000036
100%		+20	836,600,005	0.006	0.00000060
100%		+30	836,599,998	-0.002	-0.00000024
100%		+40	836,600,001	0.001	0.00000012
100%		+50	836,600,004	0.005	0.00000048
115%		4.43	+25	836,600,002	0.002
BATT.ENDPOINT	2.90	+25	836,599,998	-0.002	-0.00000024

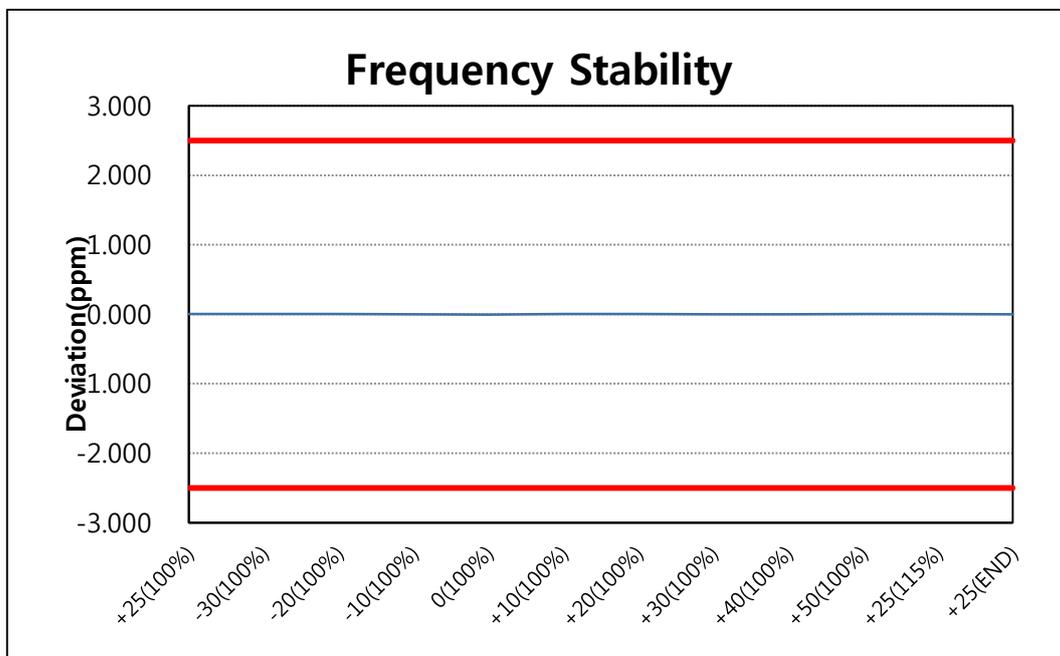

7.8.4 FREQUENCY STABILITY (WCDMA1700)

OPERATING FREQUENCY : 1,732,400,000 Hz
 CHANNEL : 1412(Mid)
 REFERENCE VOLTAGE : 3.85 V DC
 LIMIT : The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(ppm)	(%)
100%	3.85	+25(Ref)	1,732,399,996	-0.002	-0.00000023
100%		-30	1,732,399,998	-0.001	-0.00000012
100%		-20	1,732,399,996	-0.002	-0.00000023
100%		-10	1,732,399,996	-0.002	-0.00000023
100%		0	1,732,399,998	-0.001	-0.00000012
100%		+10	1,732,399,997	-0.002	-0.00000017
100%		+20	1,732,399,995	-0.003	-0.00000029
100%		+30	1,732,400,002	0.001	0.00000012
100%		+40	1,732,399,997	-0.002	-0.00000017
100%		+50	1,732,399,992	-0.005	-0.00000046
115%	4.43	+25	1,732,399,994	-0.003	-0.00000035
BATT.ENDPOINT	2.90	+25	1,732,399,998	-0.001	-0.00000012

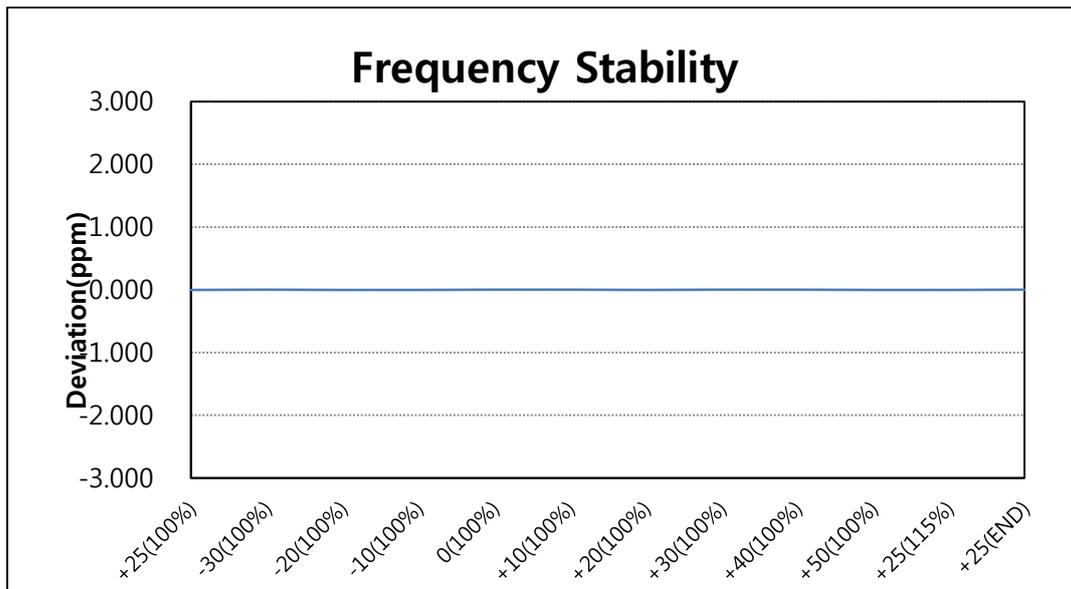


Note. Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. as such it is determined that the channels at the band edge would remain inband when the maximum measured frequency deviation noted during the frequency stability tests is applied. therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

7.8.5 FREQUENCY STABILITY (HSUPA1700)

OPERATING FREQUENCY : 1,732,400,000 Hz
 CHANNEL : 1412(Mid)
 REFERENCE VOLTAGE : 3.85 V DC
 LIMIT : The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(ppm)	(%)
100%	3.85	+25(Ref)	1,732,399,997	-0.002	-0.00000017
100%		-30	1,732,399,995	-0.003	-0.00000029
100%		-20	1,732,399,998	-0.001	-0.00000012
100%		-10	1,732,400,001	0.001	0.00000006
100%		0	1,732,399,994	-0.003	-0.00000035
100%		+10	1,732,399,996	-0.002	-0.00000023
100%		+20	1,732,400,003	0.002	0.00000017
100%		+30	1,732,399,996	-0.002	-0.00000023
100%		+40	1,732,399,993	-0.004	-0.00000040
100%		+50	1,732,399,997	-0.002	-0.00000017
115%	4.43	+25	1,732,399,995	-0.003	-0.00000029
BATT.ENDPOINT	2.90	+25	1,732,399,995	-0.003	-0.00000029

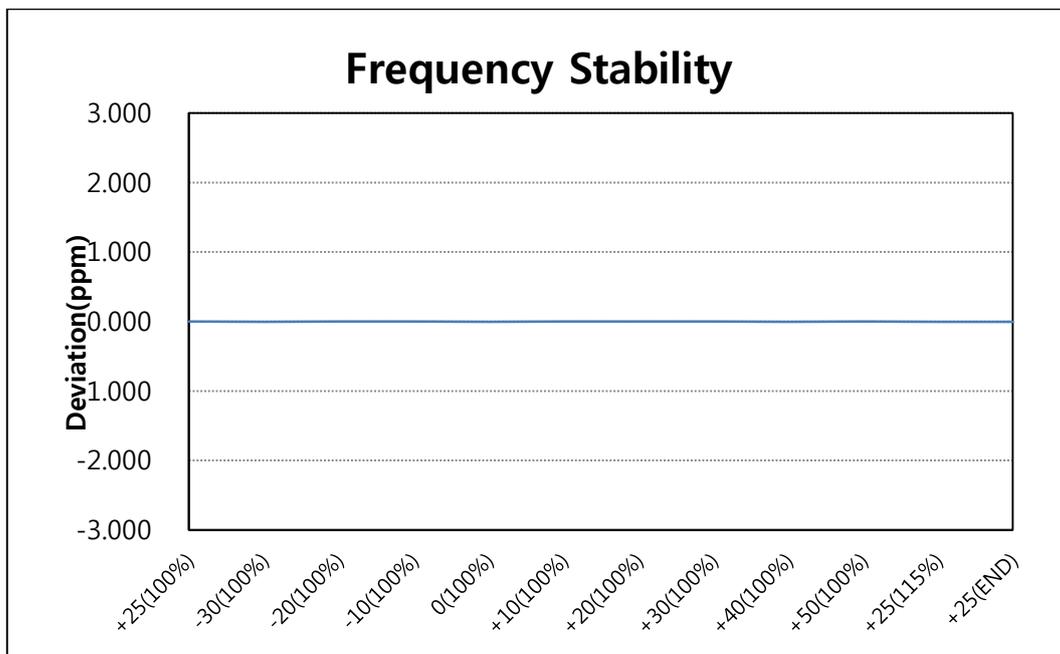


Note. Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. as such it is determined that the channels at the band edge would remain inband when the maximum measured frequency deviation noted during the frequency stability tests is applied. therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

7.8.6 FREQUENCY STABILITY (GSM1900)

OPERATING FREQUENCY : 1,880,000,000 Hz
 CHANNEL : 661(Mid)
 REFERENCE VOLTAGE : 3.85 V DC
 LIMIT : The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(ppm)	(%)
100%	3.85	+25(Ref)	1,880,000,005	0.003	0.00000027
100%		-30	1,879,999,997	-0.002	-0.00000016
100%		-20	1,879,999,994	-0.003	-0.00000032
100%		-10	1,880,000,004	0.002	0.00000021
100%		0	1,880,000,010	0.005	0.00000053
100%		+10	1,879,999,993	-0.004	-0.00000037
100%		+20	1,879,999,995	-0.003	-0.00000027
100%		+30	1,880,000,021	0.011	0.00000112
100%		+40	1,879,999,989	-0.006	-0.00000059
100%		+50	1,879,999,990	-0.005	-0.00000053
115%	4.43	+25	1,879,999,977	-0.012	-0.00000122
BATT.ENDPOINT	2.90	+25	1,879,999,994	-0.003	-0.00000032

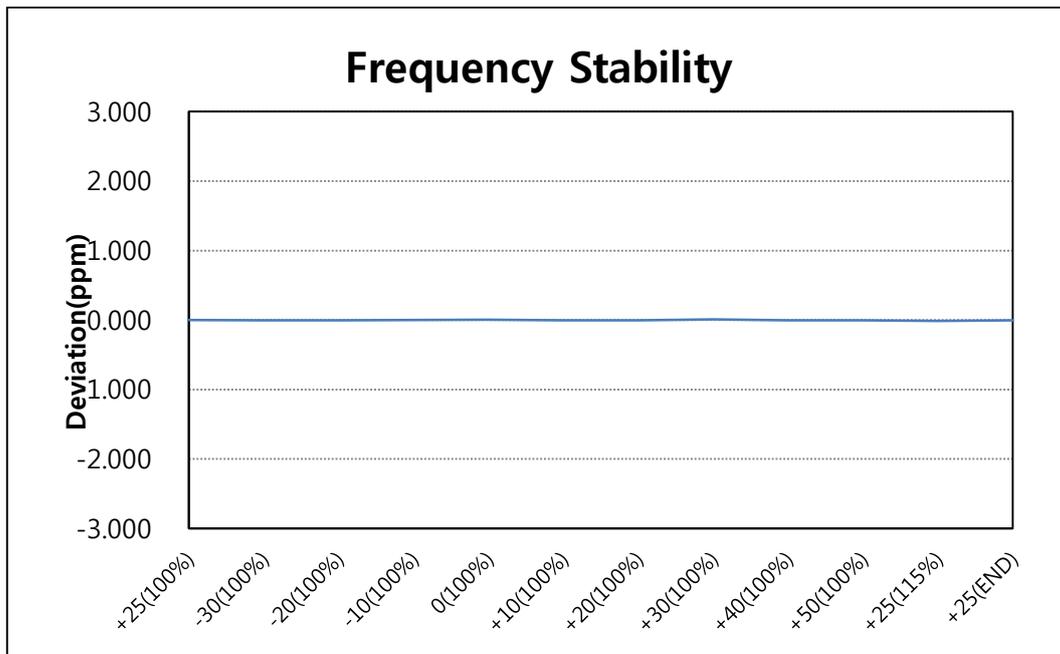


Note. Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. as such it is determined that the channels at the band edge would remain inband when the maximum measured frequency deviation noted during the frequency stability tests is applied. therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

7.8.7 FREQUENCY STABILITY (WCDMA1900)

OPERATING FREQUENCY : 1,880,000,000 Hz
 CHANNEL : 9400(Mid)
 REFERENCE VOLTAGE : 3.85 V DC
 LIMIT : The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(ppm)	(%)
100%	3.85	+25(Ref)	1,880,000,005	0.003	0.00000027
100%		-30	1,879,999,994	-0.003	-0.00000032
100%		-20	1,880,000,004	0.002	0.00000021
100%		-10	1,880,000,007	0.004	0.00000037
100%		0	1,880,000,003	0.002	0.00000016
100%		+10	1,880,000,005	0.003	0.00000027
100%		+20	1,880,000,008	0.004	0.00000043
100%		+30	1,880,000,004	0.002	0.00000021
100%		+40	1,880,000,003	0.002	0.00000016
100%		+50	1,880,000,004	0.002	0.00000021
115%	4.43	+25	1,880,000,007	0.004	0.00000037
BATT.ENDPOINT	2.90	+25	1,880,000,006	0.003	0.00000032

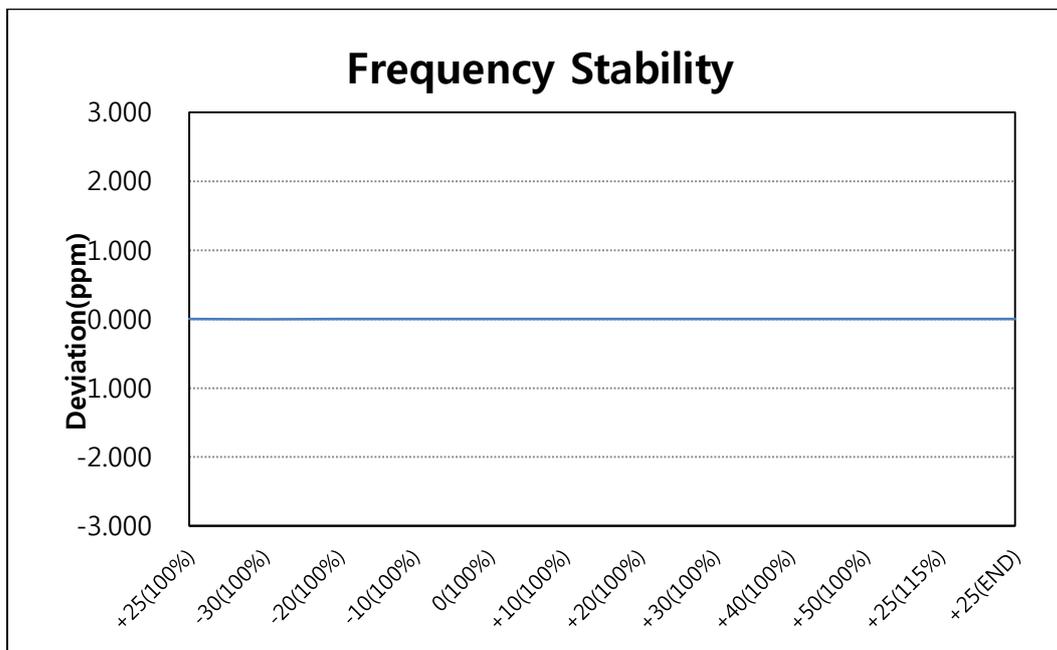


Note. Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. as such it is determined that the channels at the band edge would remain inband when the maximum measured frequency deviation noted during the frequency stability tests is applied. therefore the device is determined to remain operating in band over the temperature and voltage range as tested.


7.8.8 FREQUENCY STABILITY (HSUPA1900)

OPERATING FREQUENCY : 1,880,000,000 Hz
 CHANNEL : 9400(Mid)
 REFERENCE VOLTAGE : 3.85 V DC
 LIMIT : The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

VOLTAGE (%)	POWER (V DC)	TEMP (°C)	FREQ (Hz)	Deviation	
				(ppm)	(%)
100%	3.85	+25(Ref)	1,879,999,997	-0.002	-0.00000016
100%		-30	1,880,000,004	0.002	0.00000021
100%		-20	1,880,000,008	0.004	0.00000043
100%		-10	1,880,000,005	0.003	0.00000027
100%		0	1,880,000,006	0.003	0.00000032
100%		+10	1,880,000,004	0.002	0.00000021
100%		+20	1,880,000,003	0.002	0.00000016
100%		+30	1,879,999,996	-0.002	-0.00000021
100%		+40	1,879,999,997	-0.002	-0.00000016
100%		+50	1,880,000,009	0.005	0.00000048
115%	4.43	+25	1,880,000,005	0.003	0.00000027
BATT.ENDPOINT	2.90	+25	1,880,000,008	0.004	0.00000043

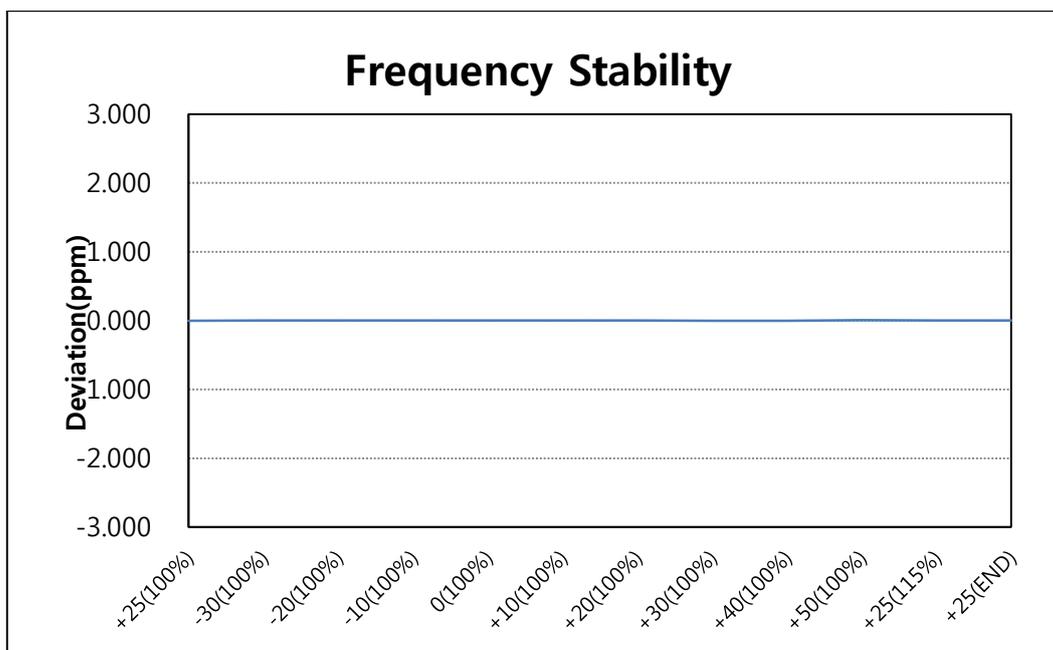


Note. Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. as such it is determined that the channels at the band edge would remain inband when the maximum measured frequency deviation noted during the frequency stability tests is applied. therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

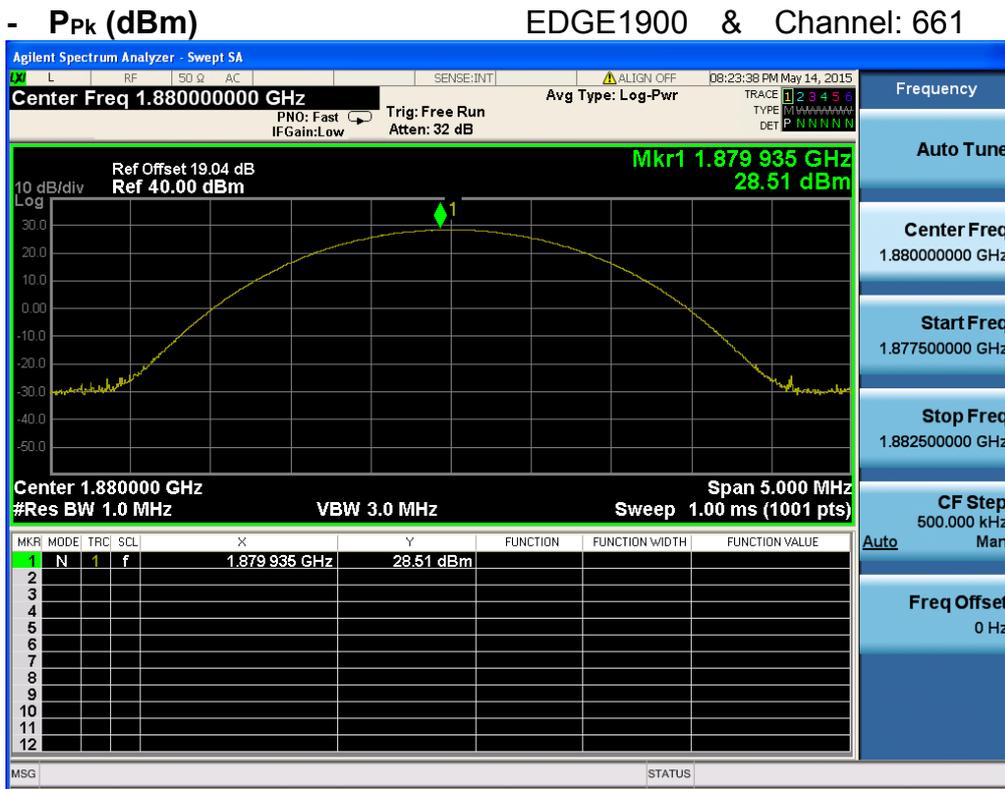


$$PAR (dB) = P_{pk} (dBm) - P_{avg} (dBm) = 28.51 \text{ dBm} - 24.78 \text{ dBm} = 3.73 \text{ dB}$$


WCDMA1900 & Channel: 9400

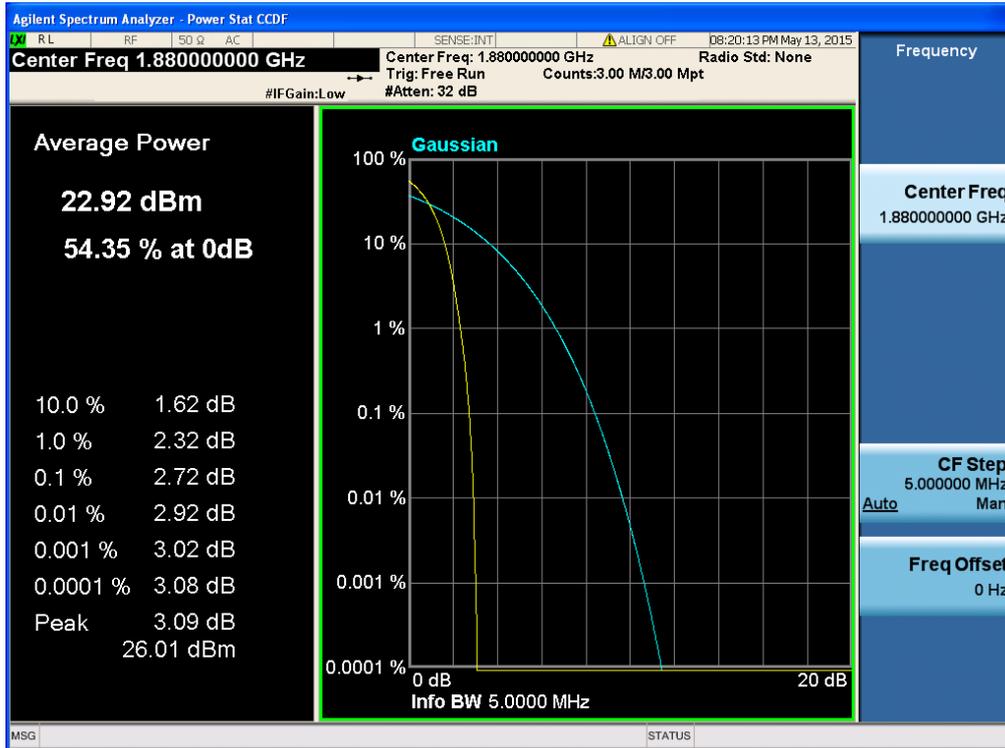


HSUPA1900 & Channel: 9400

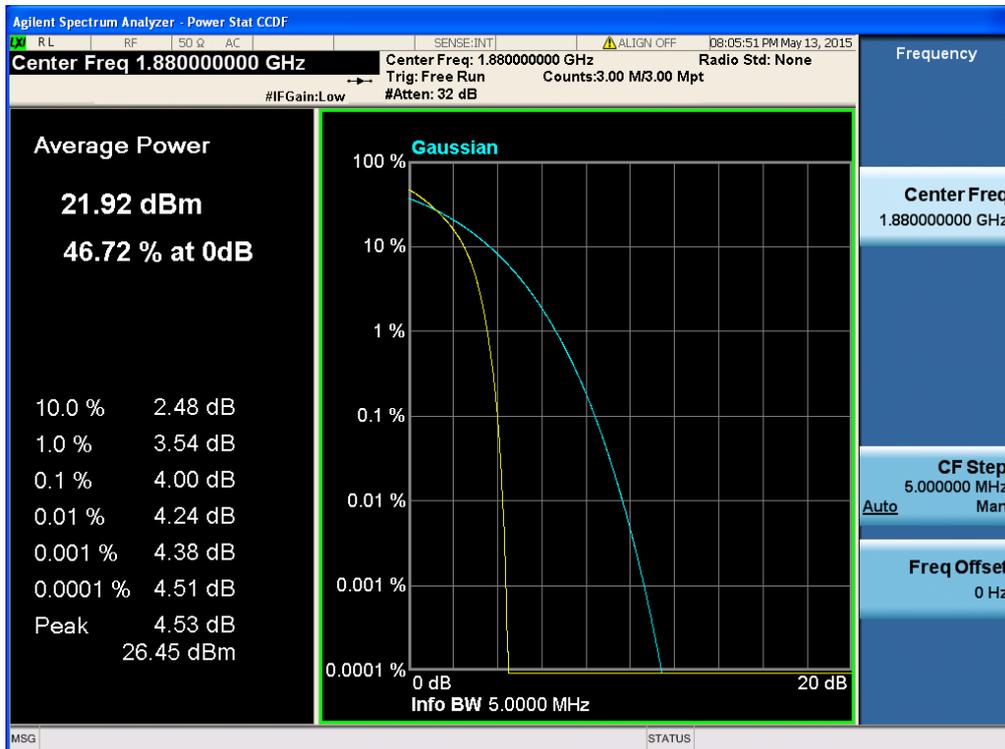

WCDMA1700 & Channel: 1412

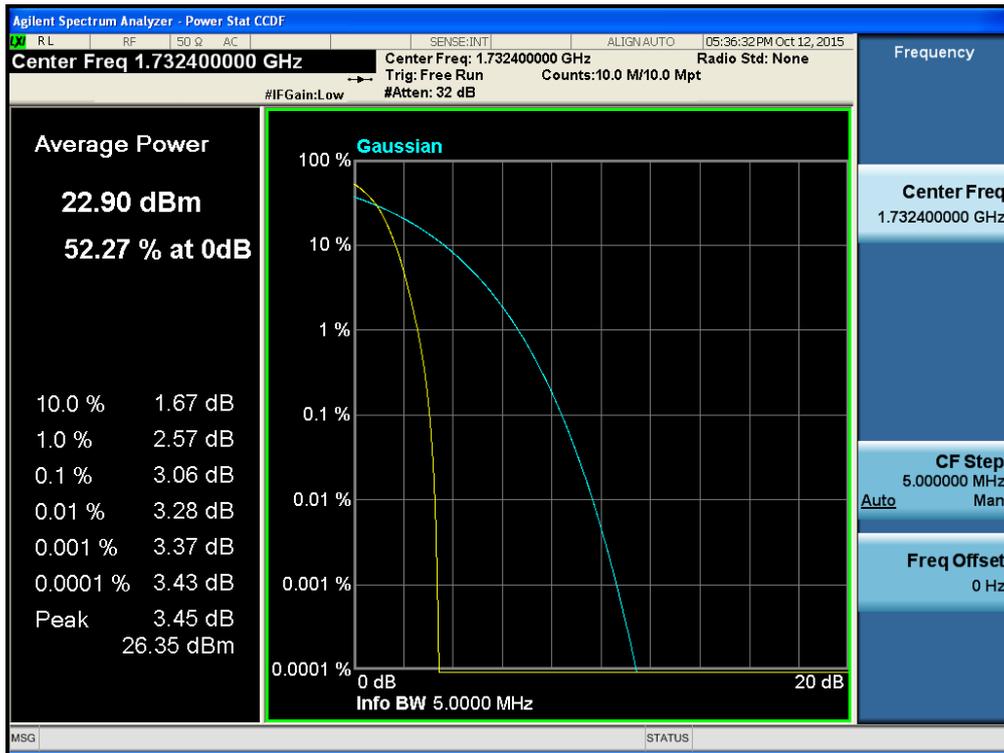


HSUPA1700 & Channel: 1412

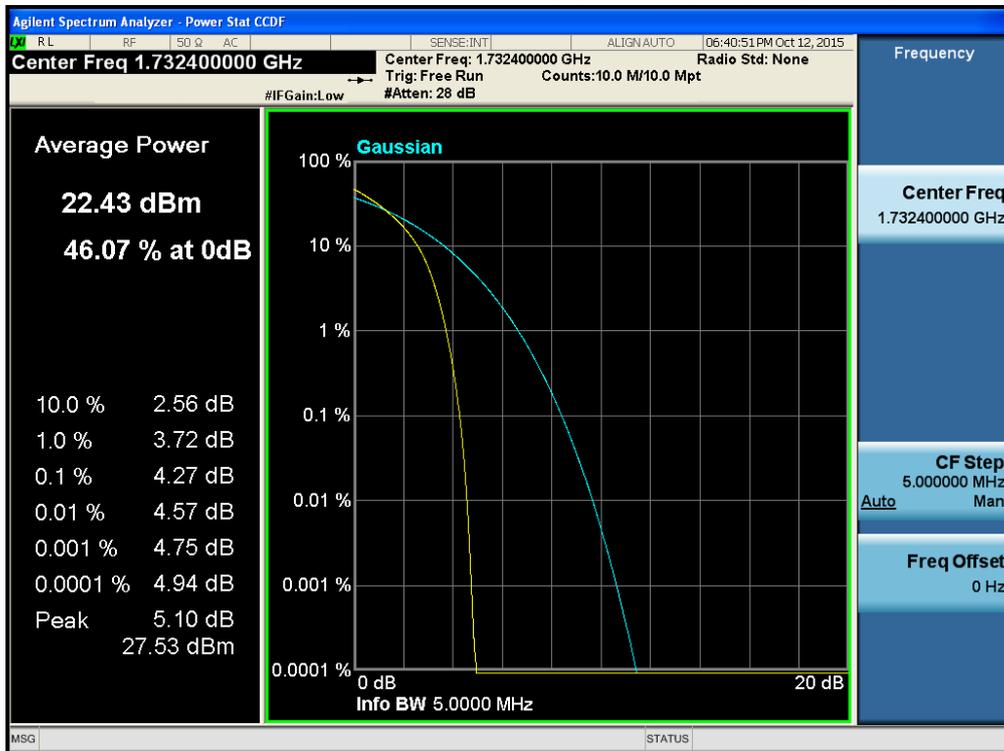


8.2 Occupied Bandwidth (99 % Bandwidth)


GSM850 & Channel: 128

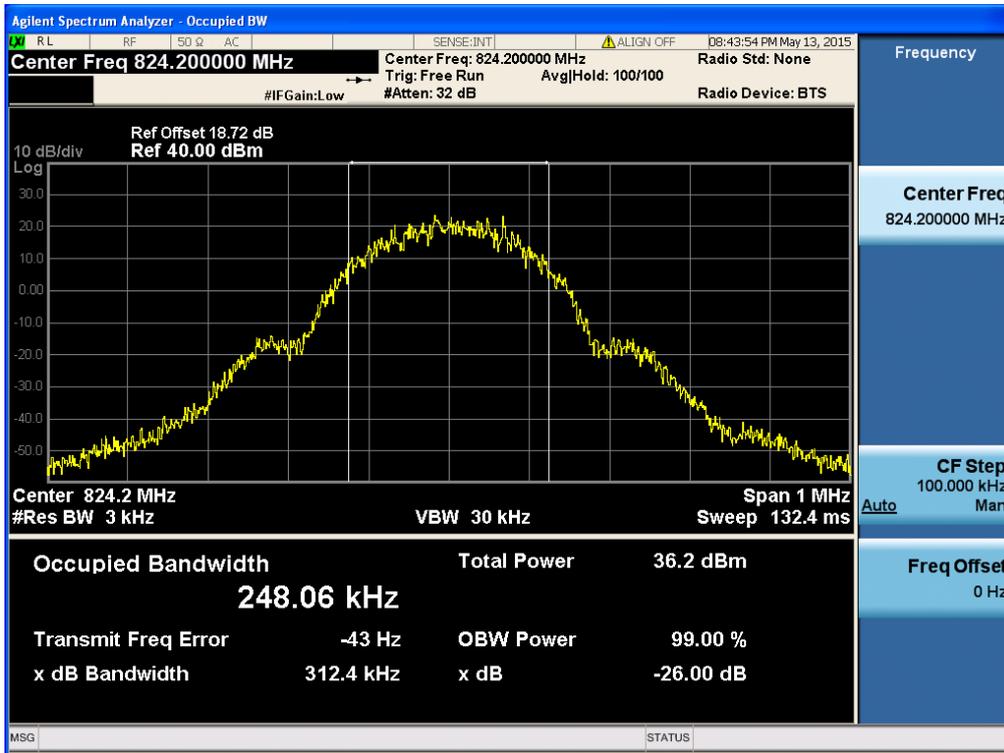


GSM850 & Channel: 190

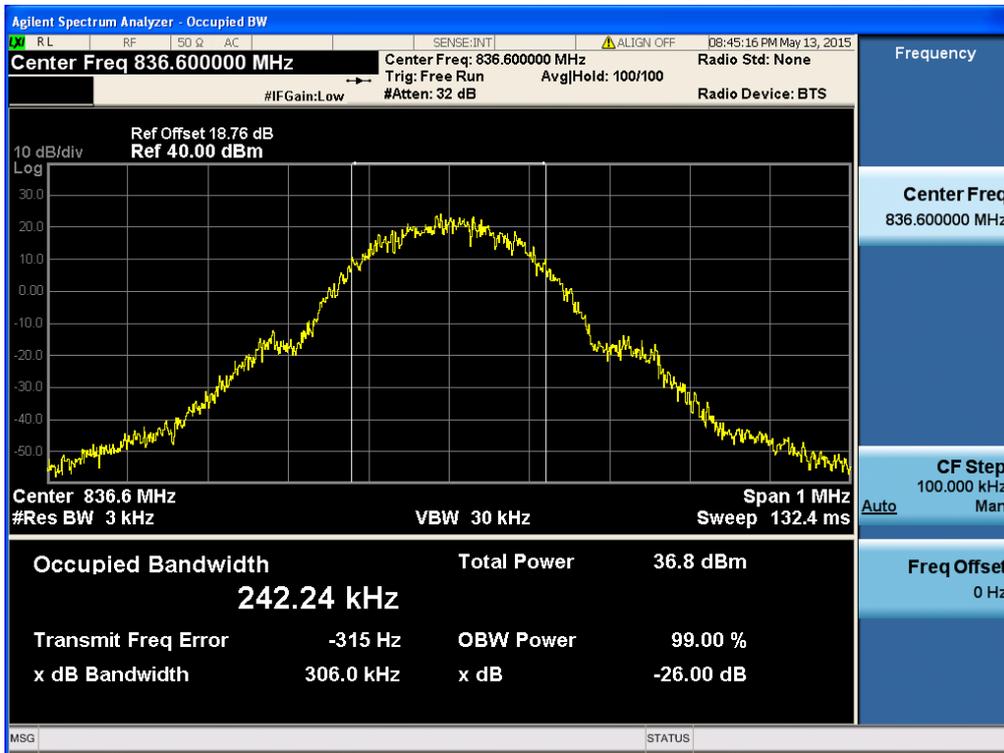


GSM850 & Channel: 251

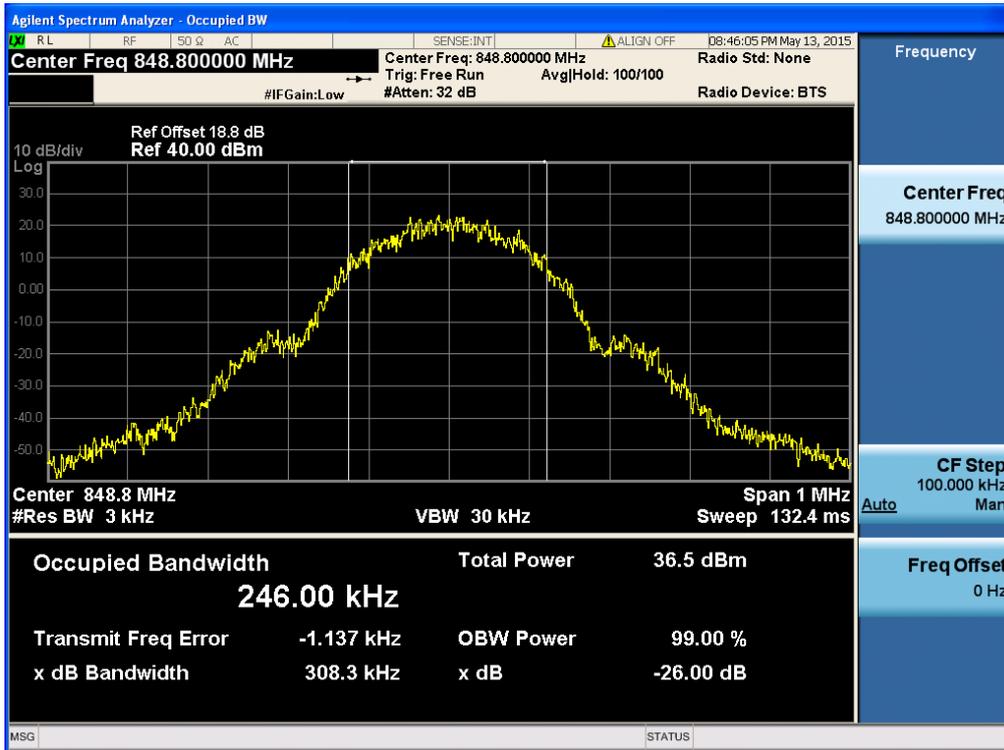


EDGE 850 & Channel: 128

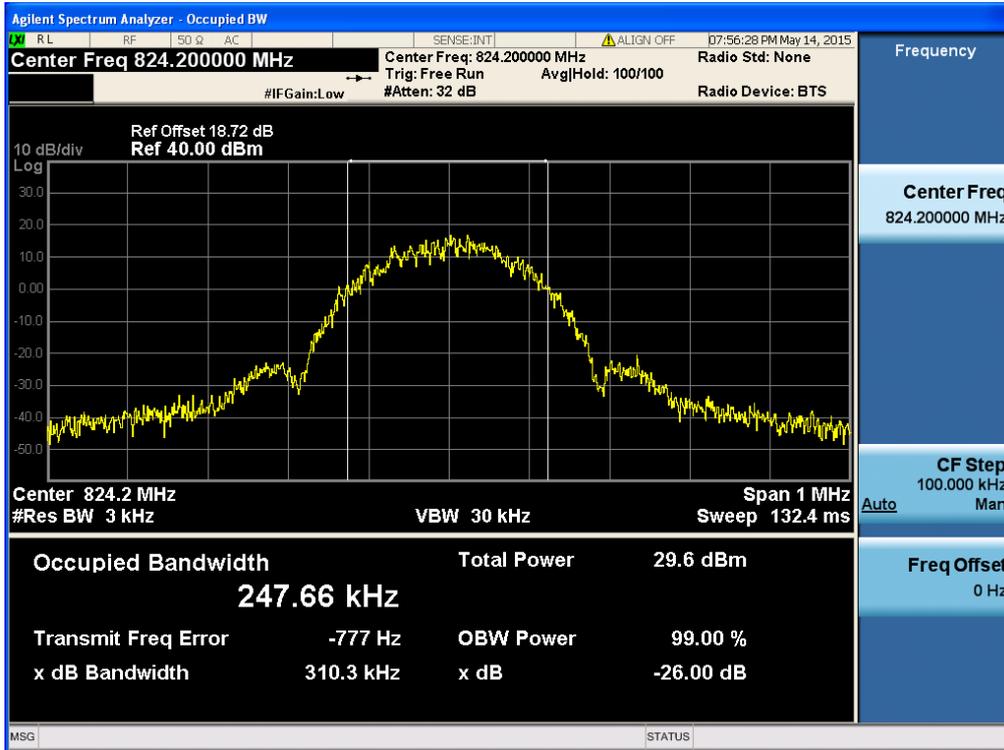


EDGE 850 & Channel: 190

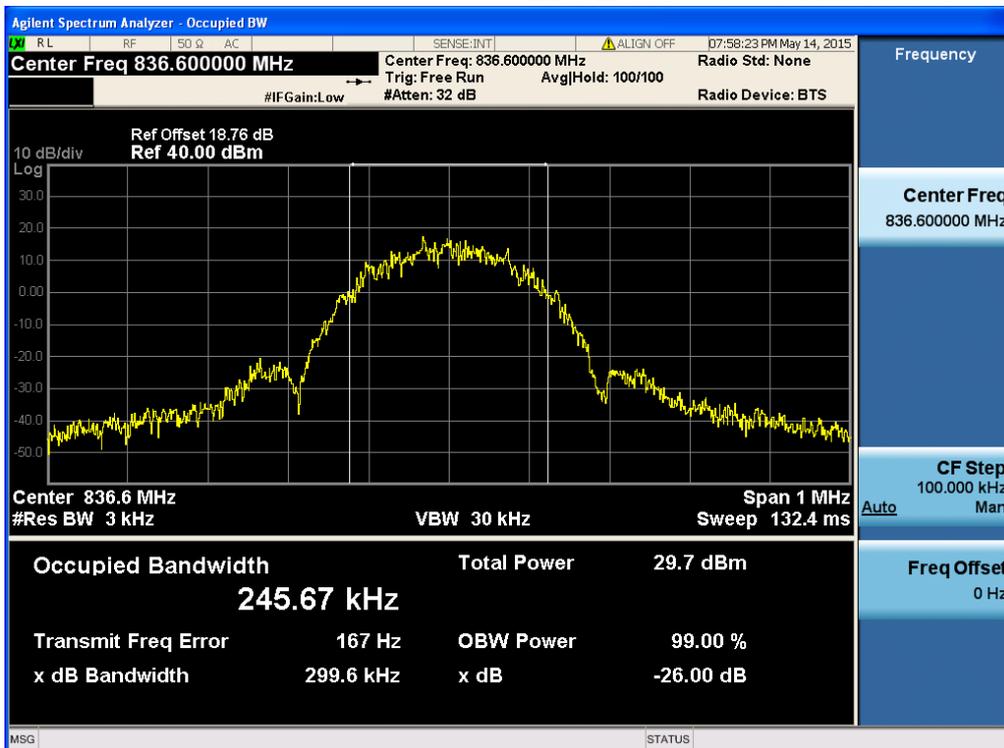


EDGE 850 & Channel: 251

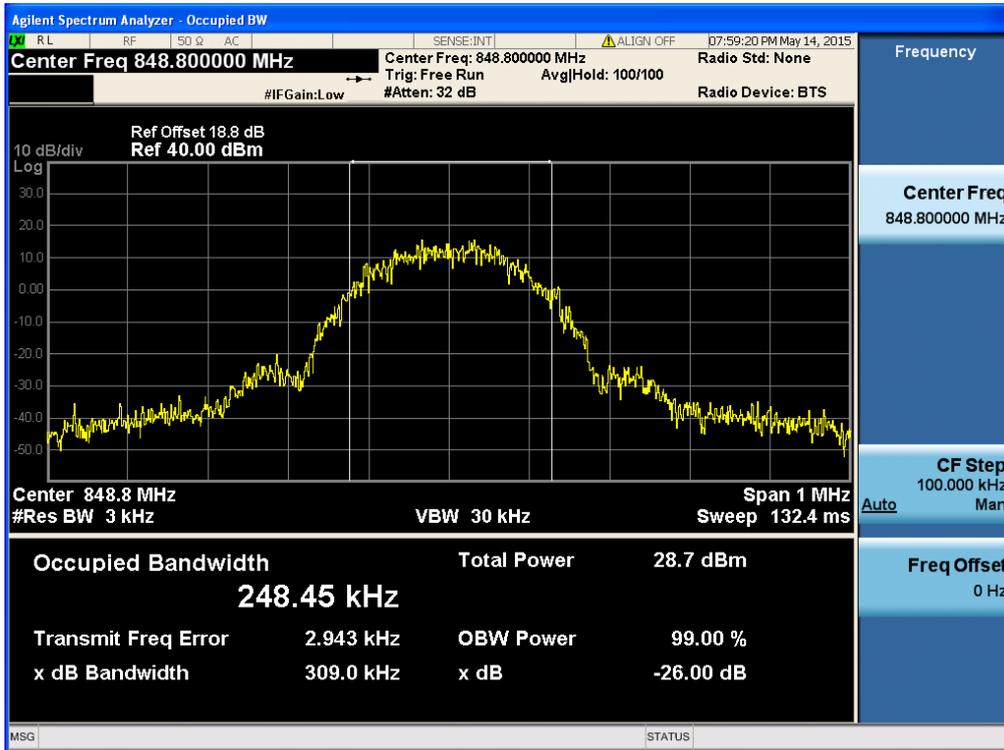


WCDMA850 & Channel: 4132

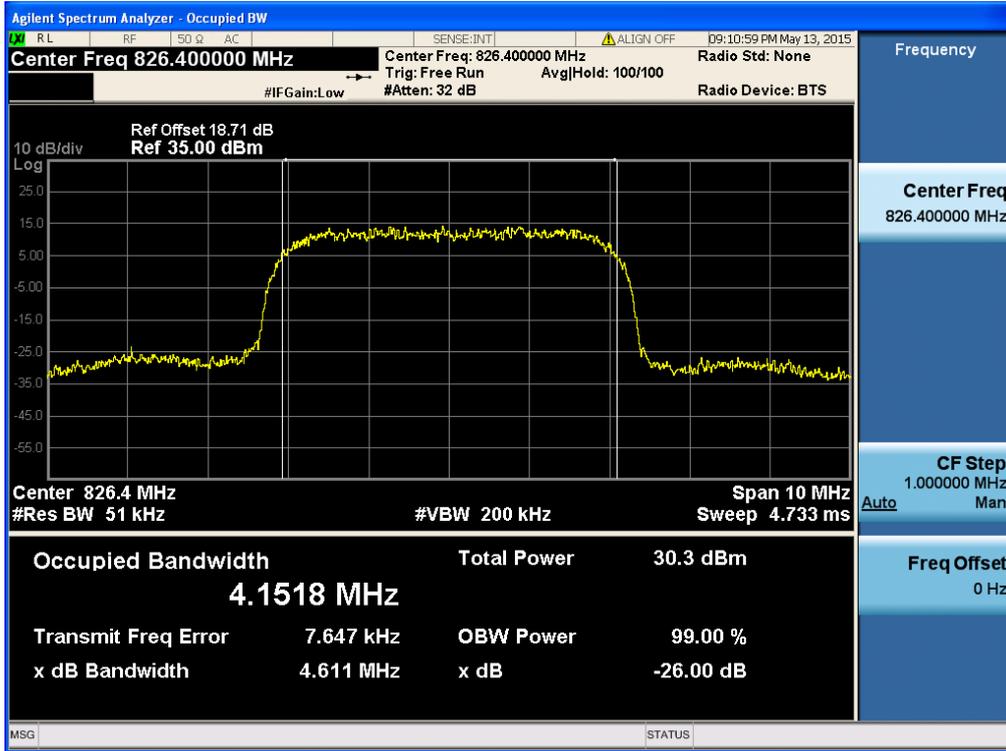


WCDMA850 & Channel: 4183

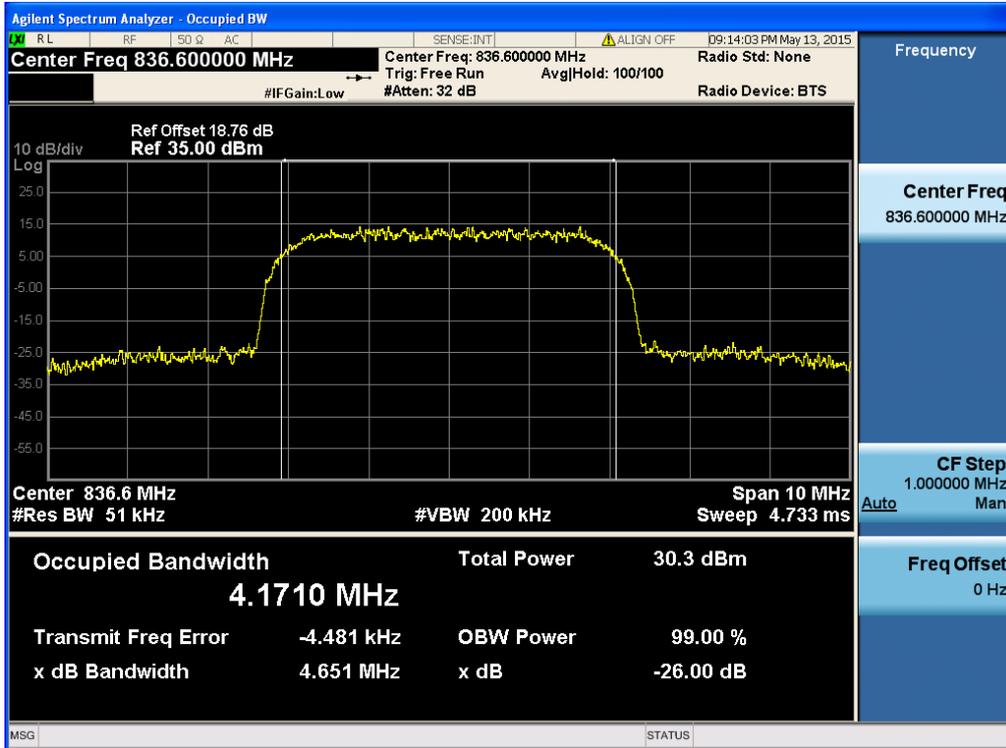


WCDMA850 & Channel: 4233

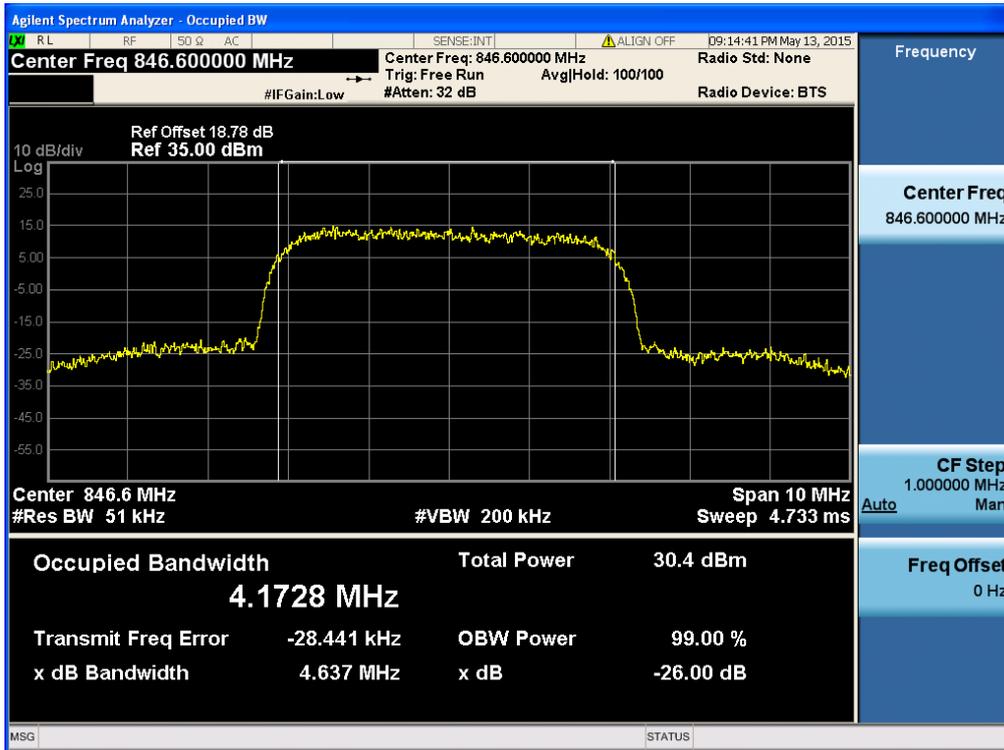


HSUPA850 & Channel: 4132

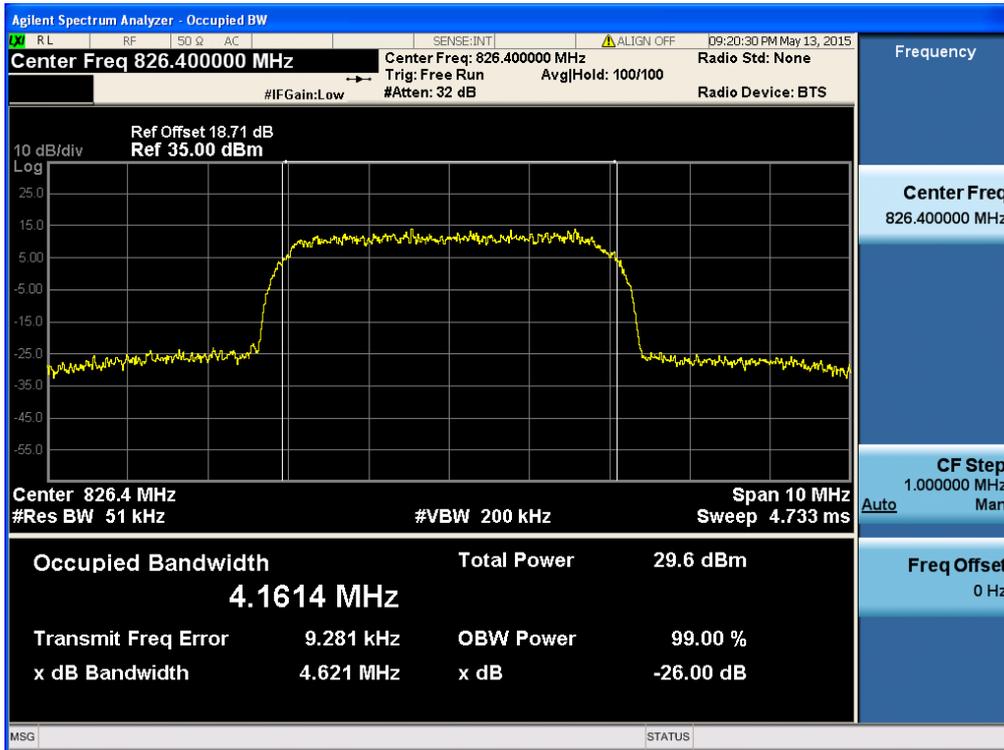


HSUPA850 & Channel: 4183

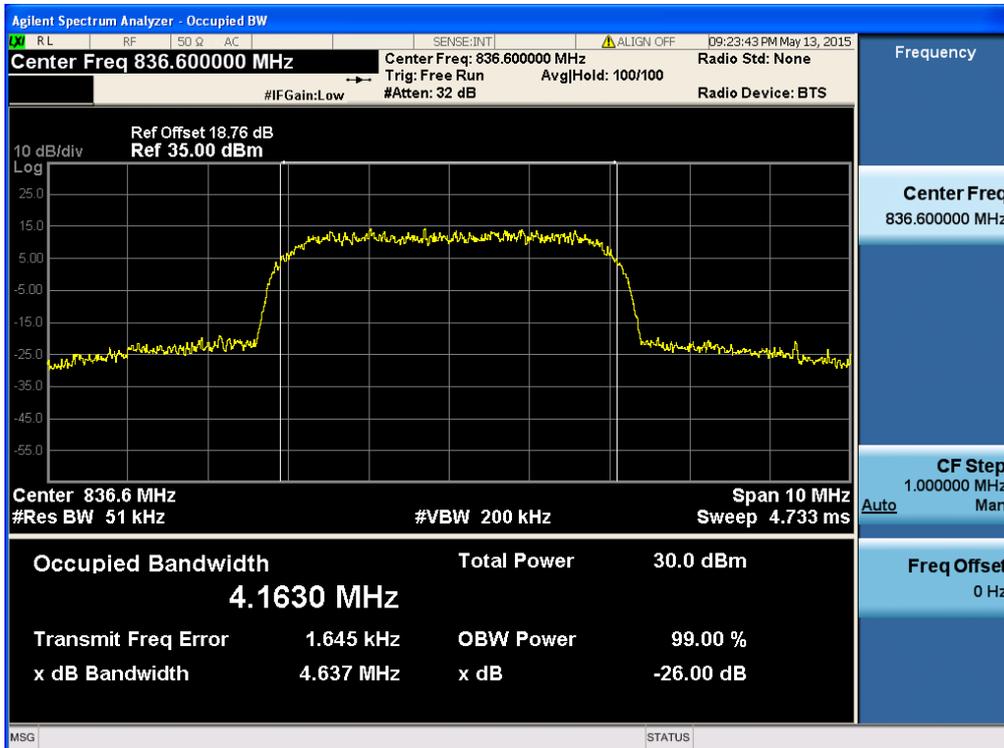


HSUPA850 & Channel: 4233

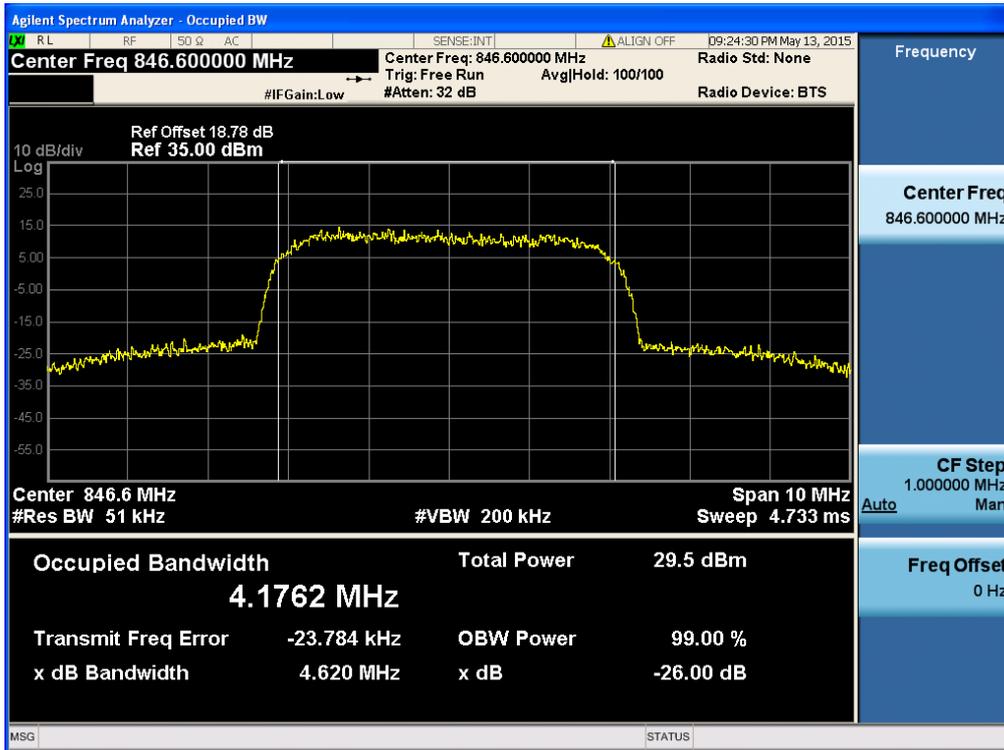


WCDMA1700 & Channel: 1312

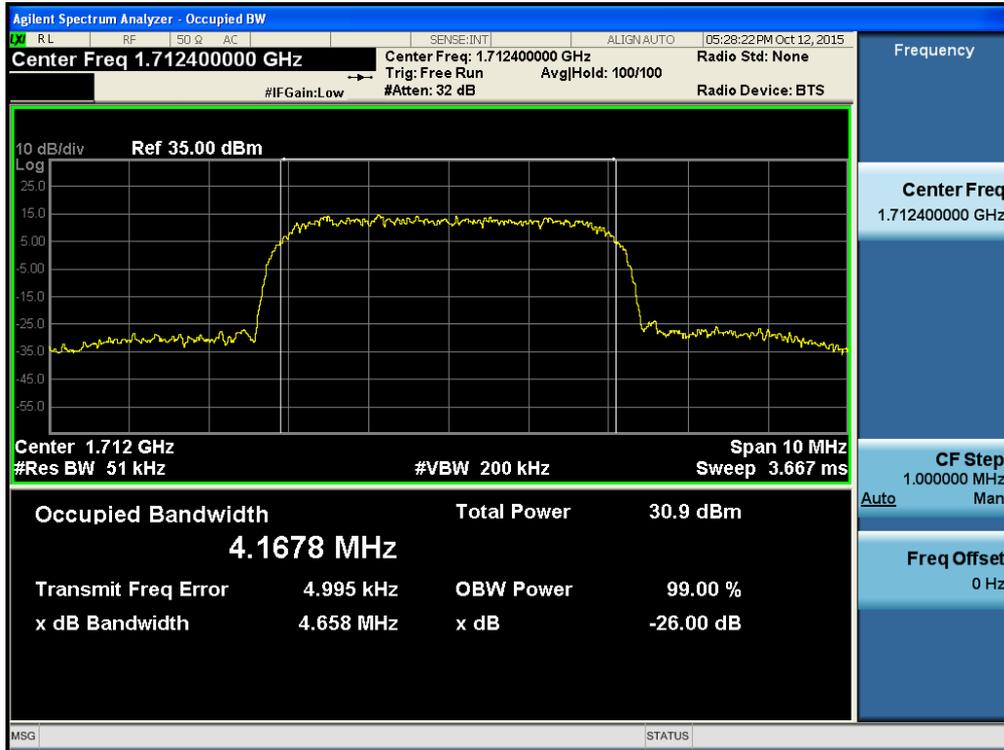


WCDMA1700 & Channel: 1412

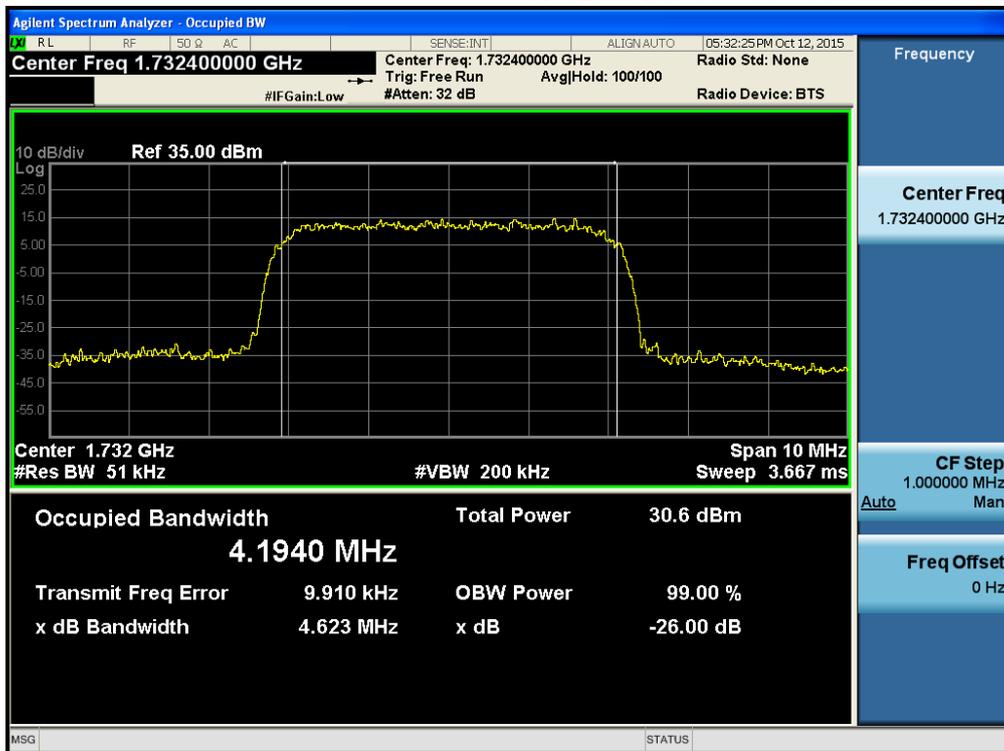


WCDMA1700 & Channel: 1513

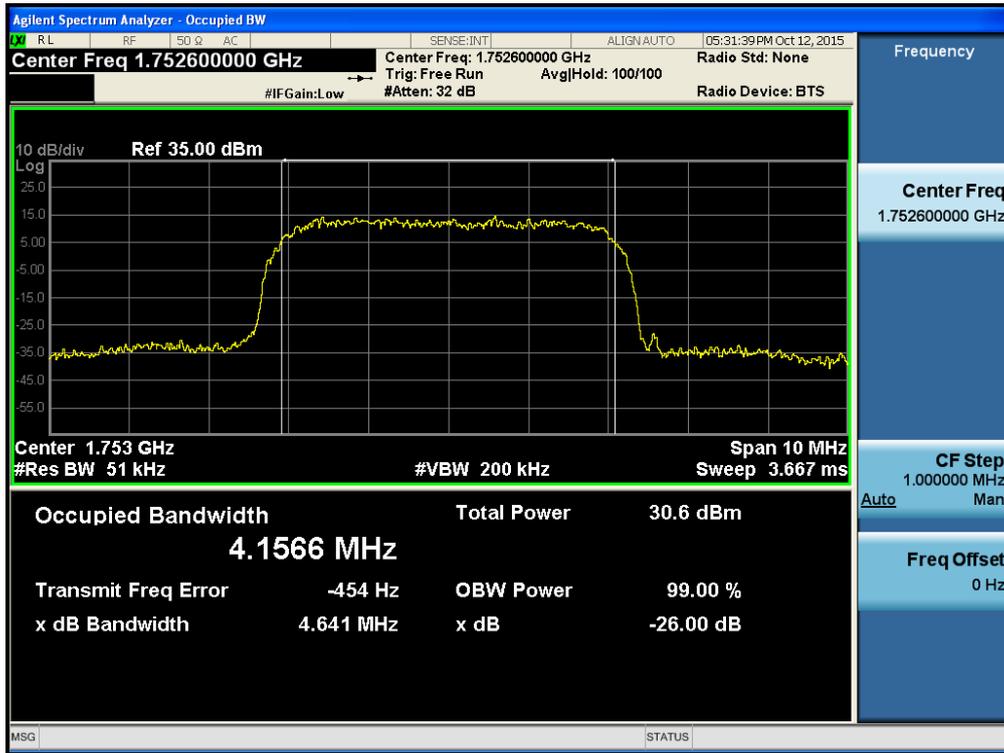


HSUPA1700 & Channel: 1312

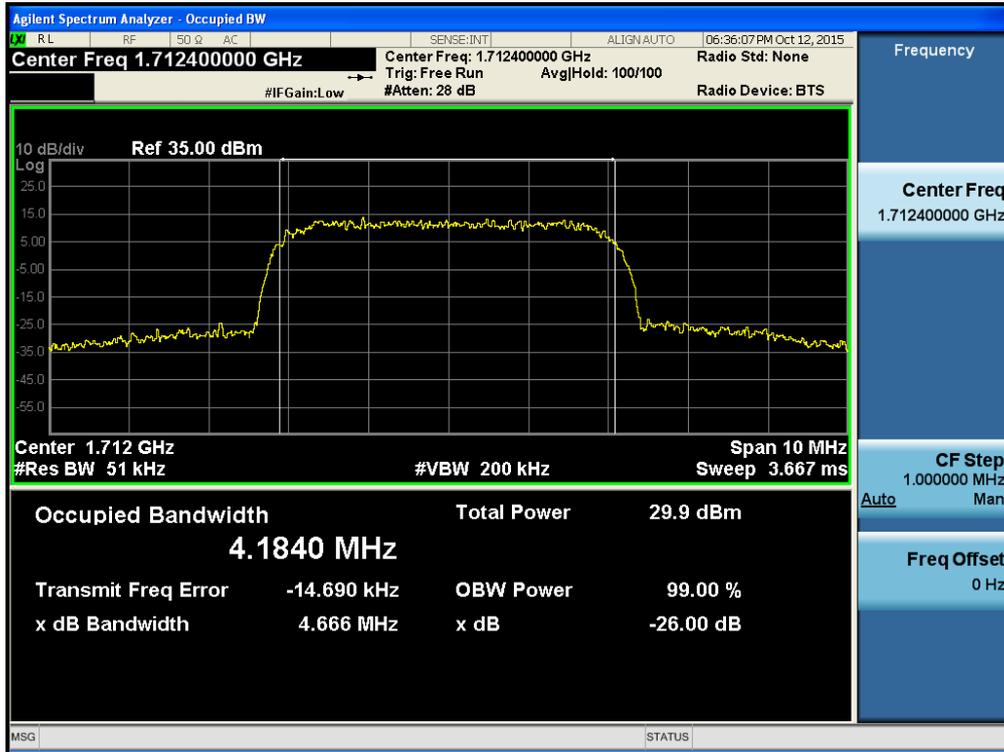


HSUPA1700 & Channel: 1412

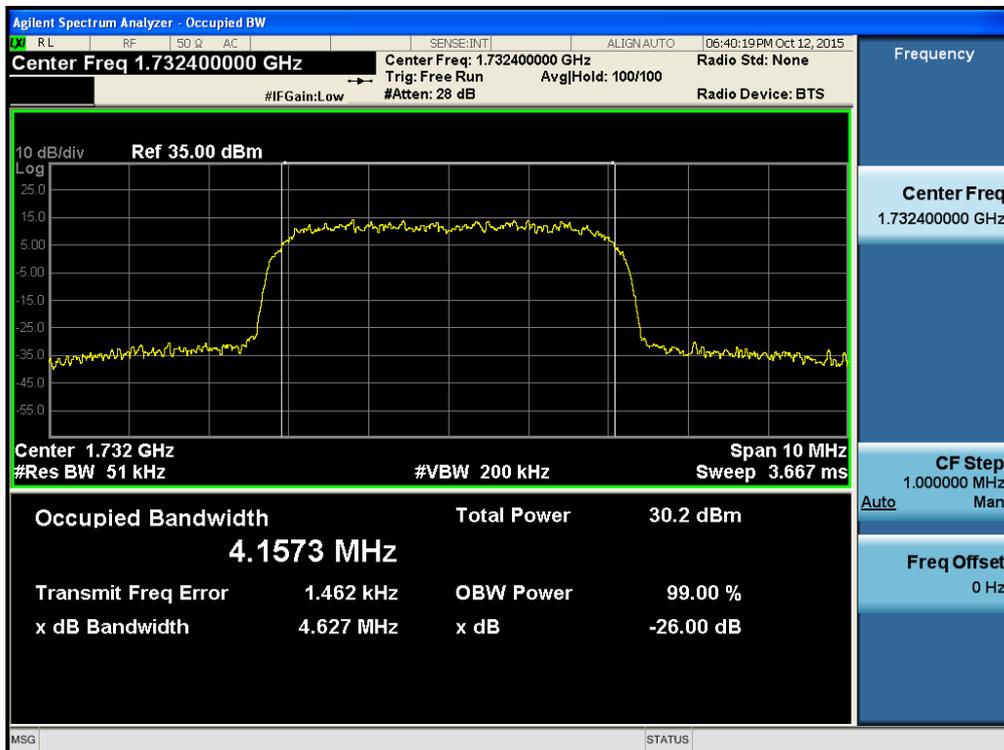


HSUPA1700 & Channel: 1513

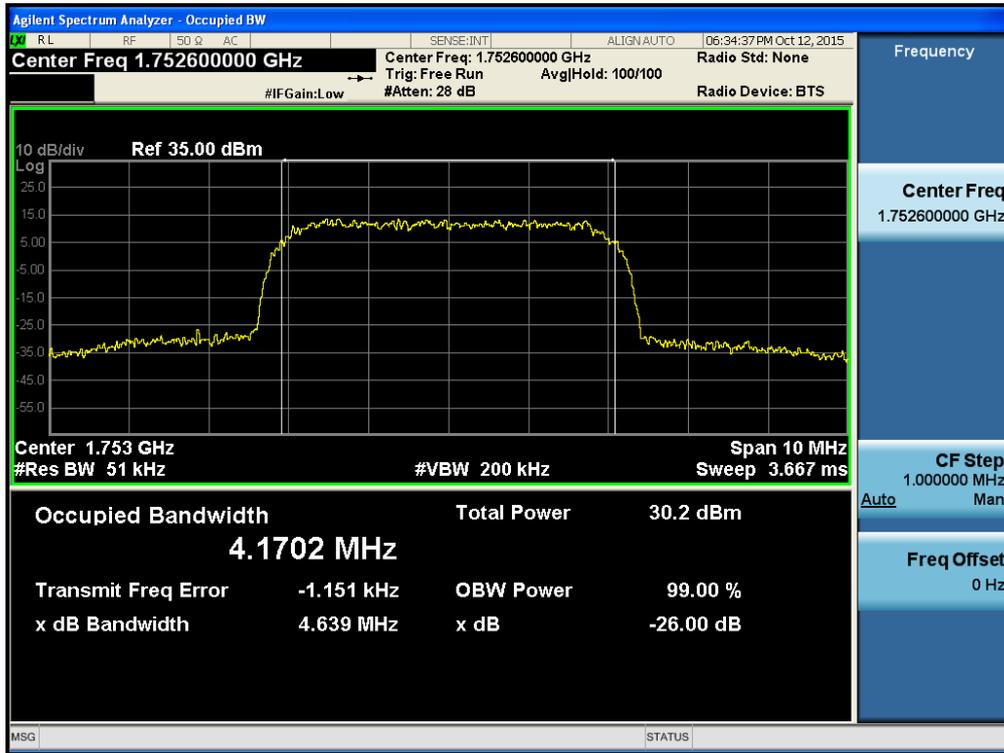


GSM 1900 & Channel: 512

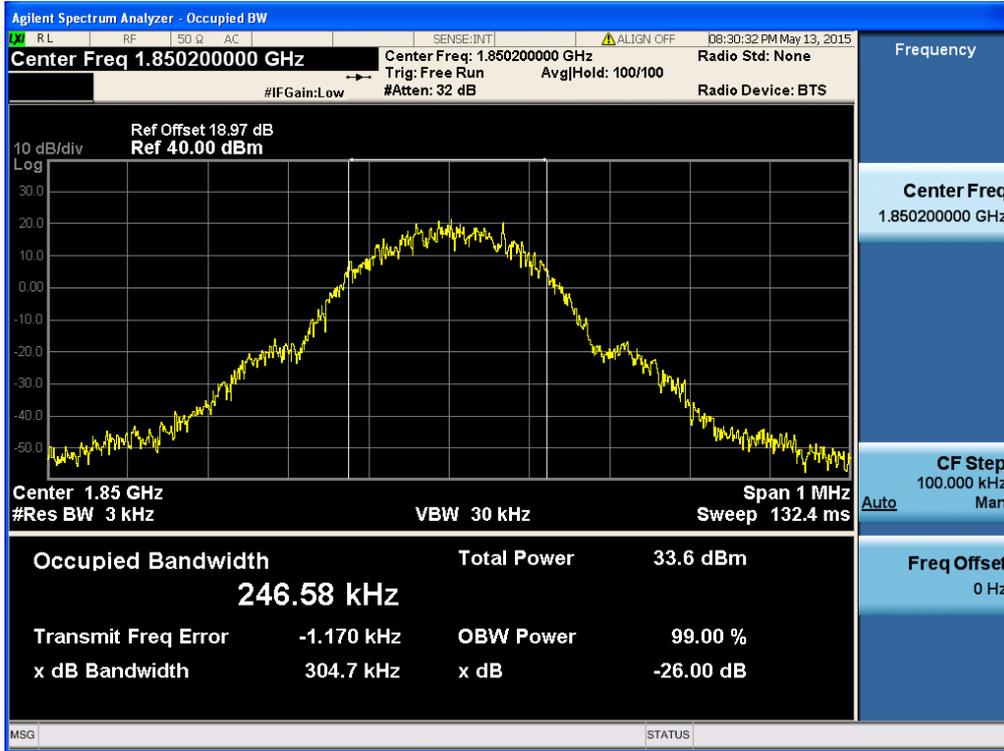


GSM 1900 & Channel: 661

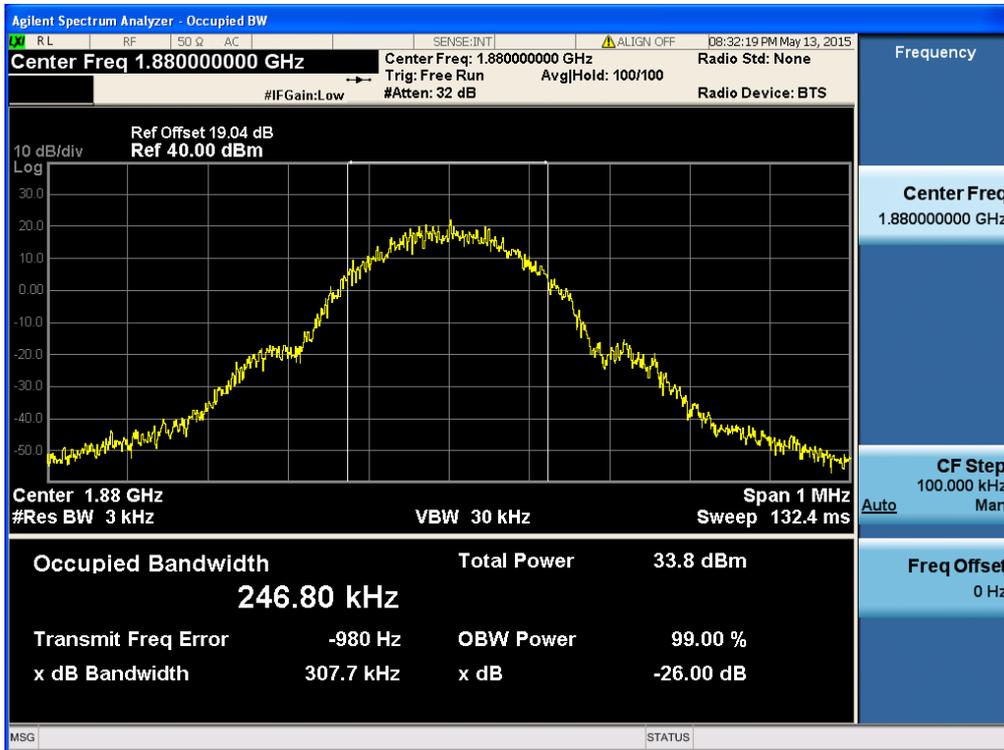


GSM 1900 & Channel: 810

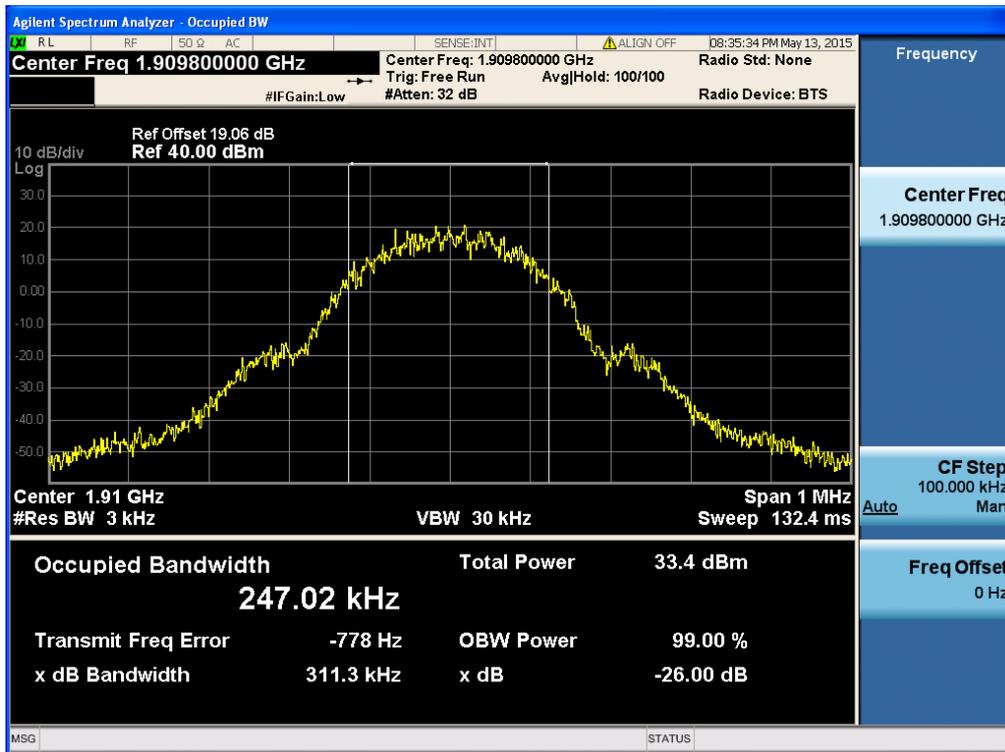


EDGE 1900 & Channel: 512

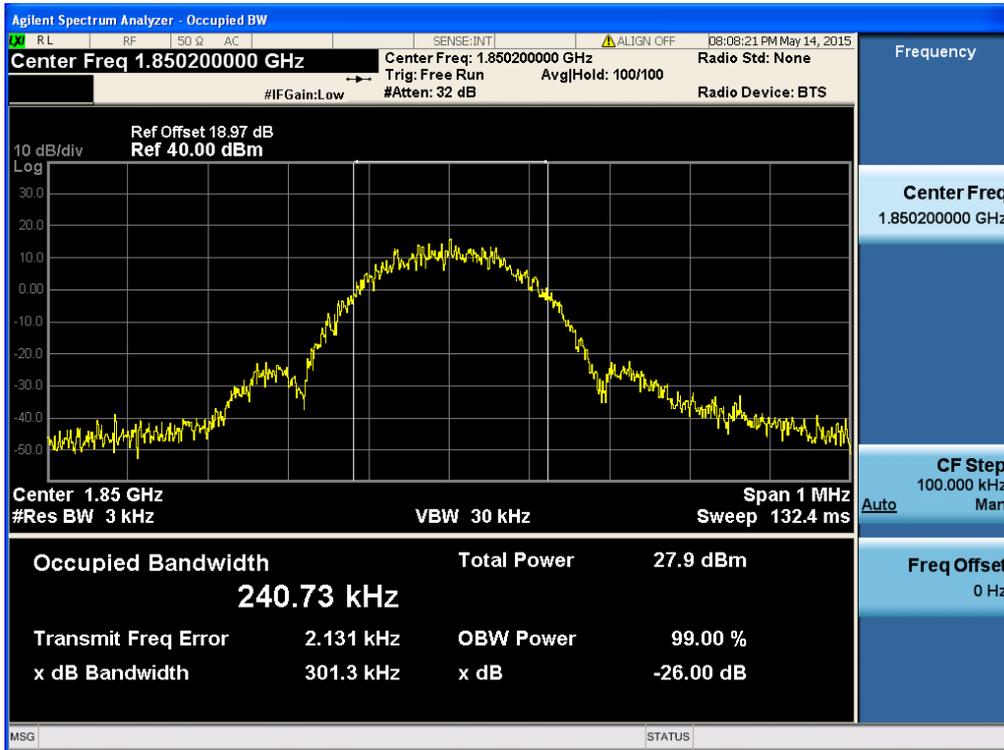


EDGE 1900 & Channel: 661

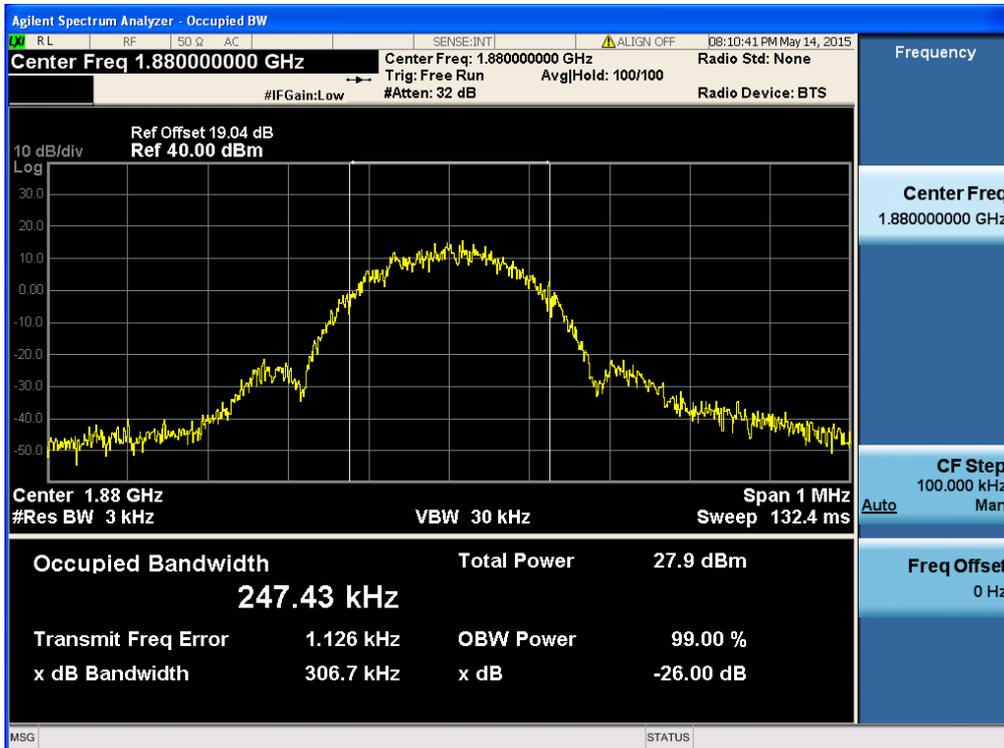


EDGE 1900 & Channel: 810

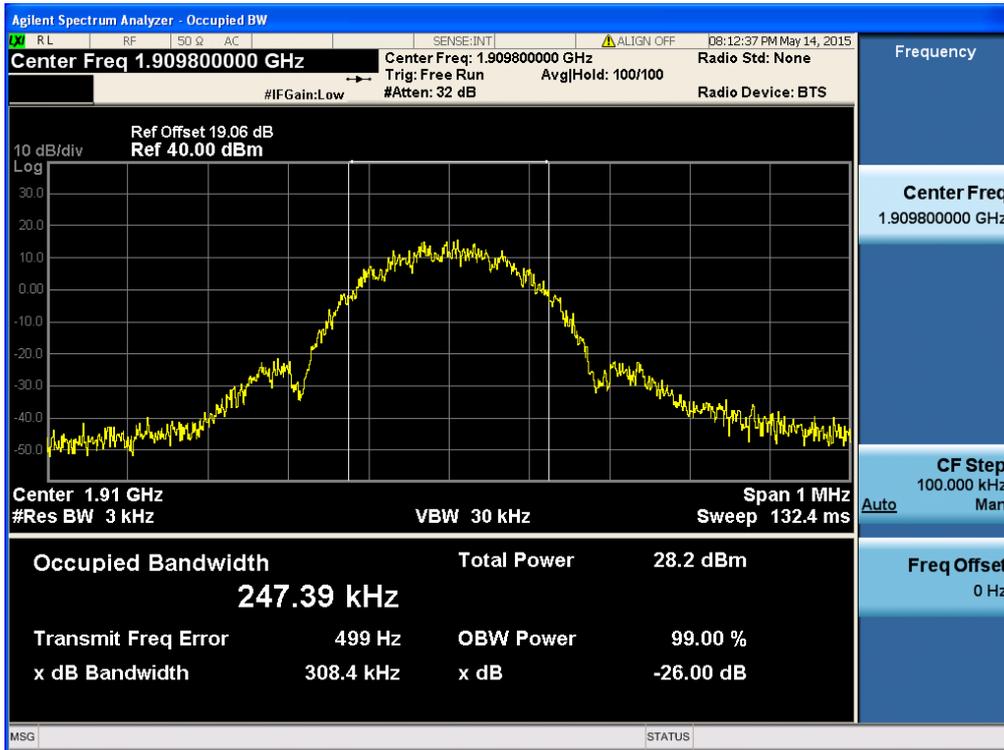


WCDMA1900 & Channel: 9262

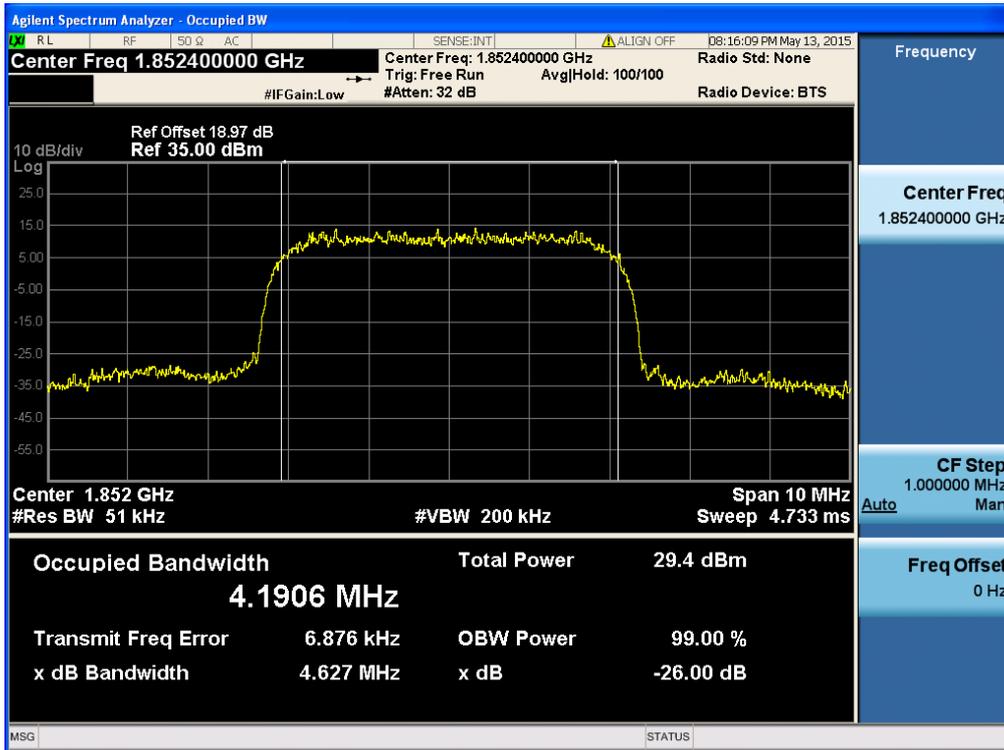


WCDMA1900 & Channel: 9400

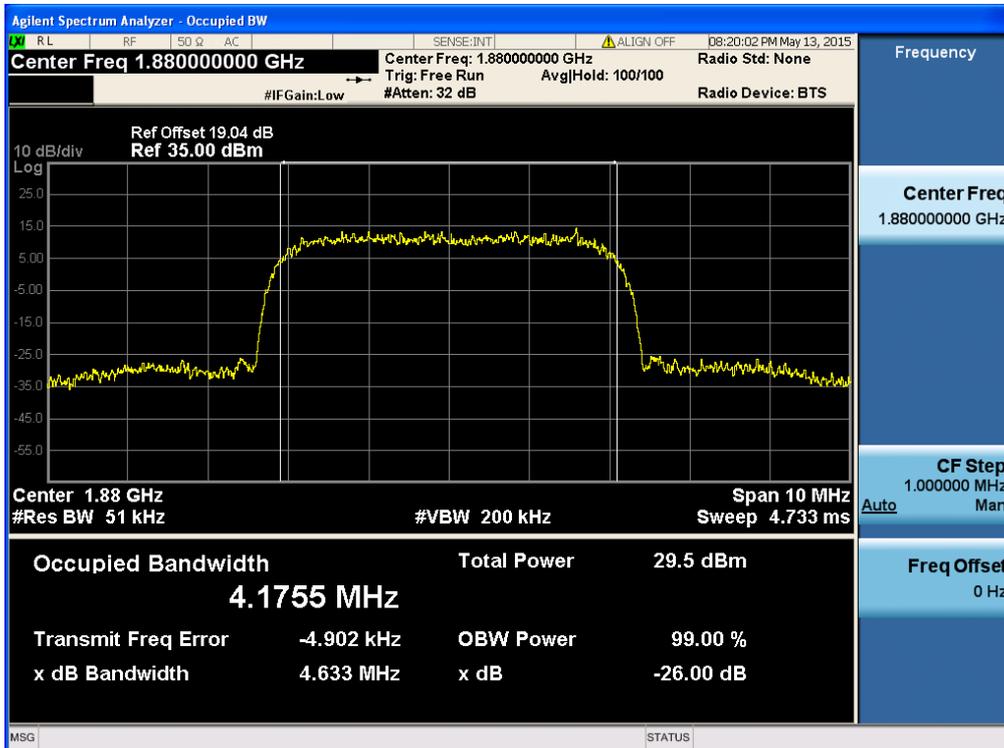


WCDMA1900 & Channel: 9538

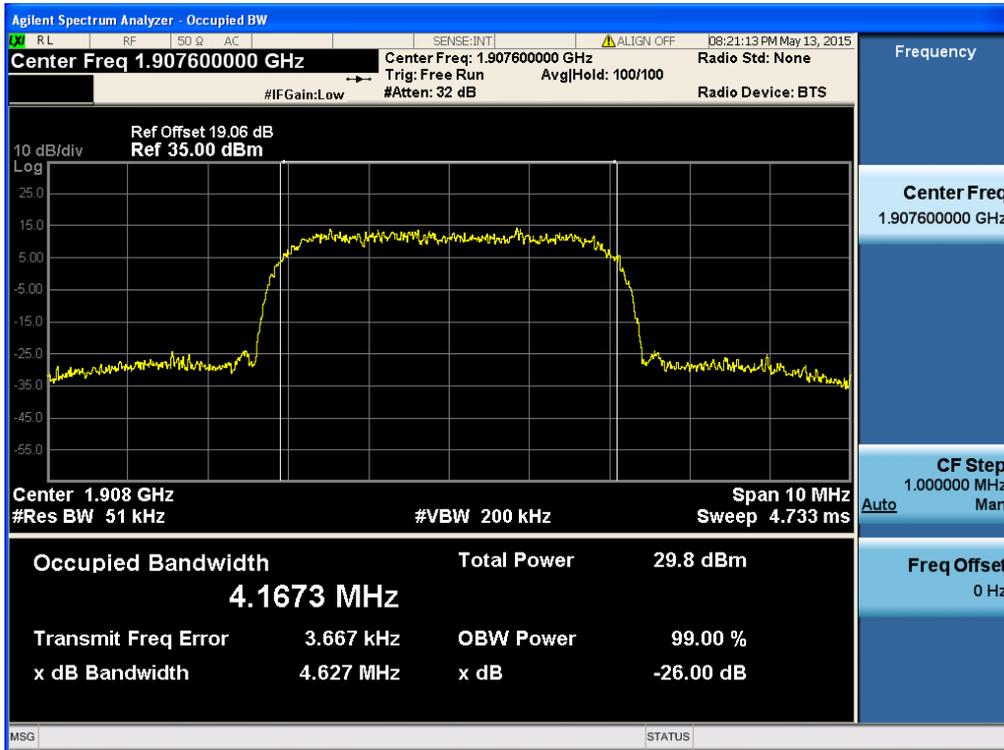


HSUPA1900 & Channel: 9262

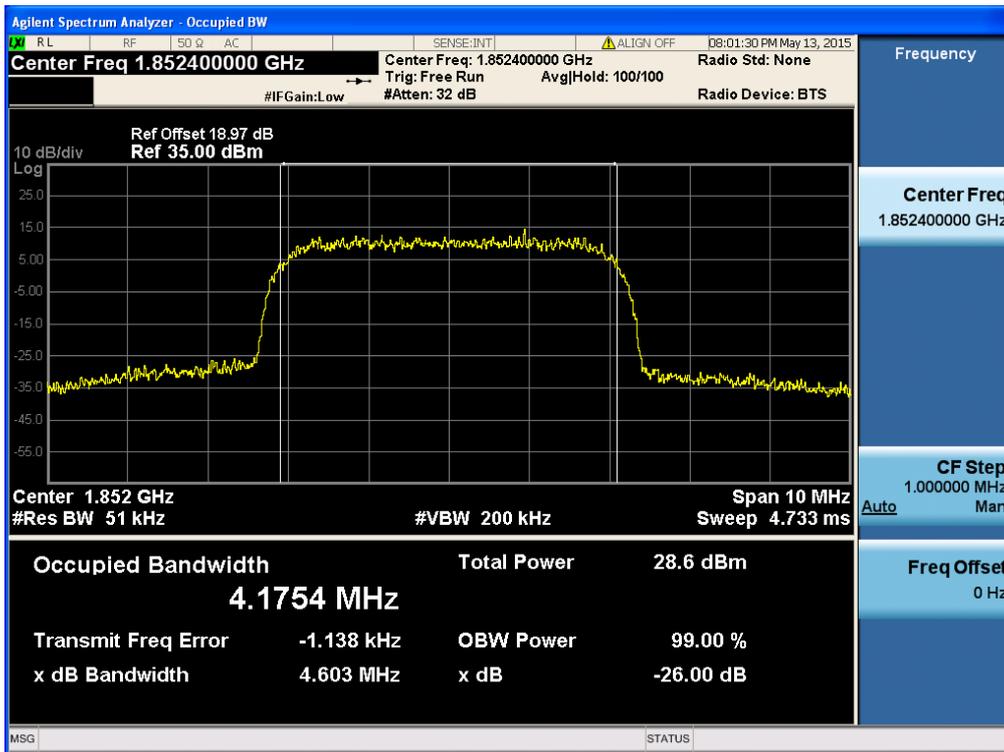

HSUPA1900 & Channel: 9400

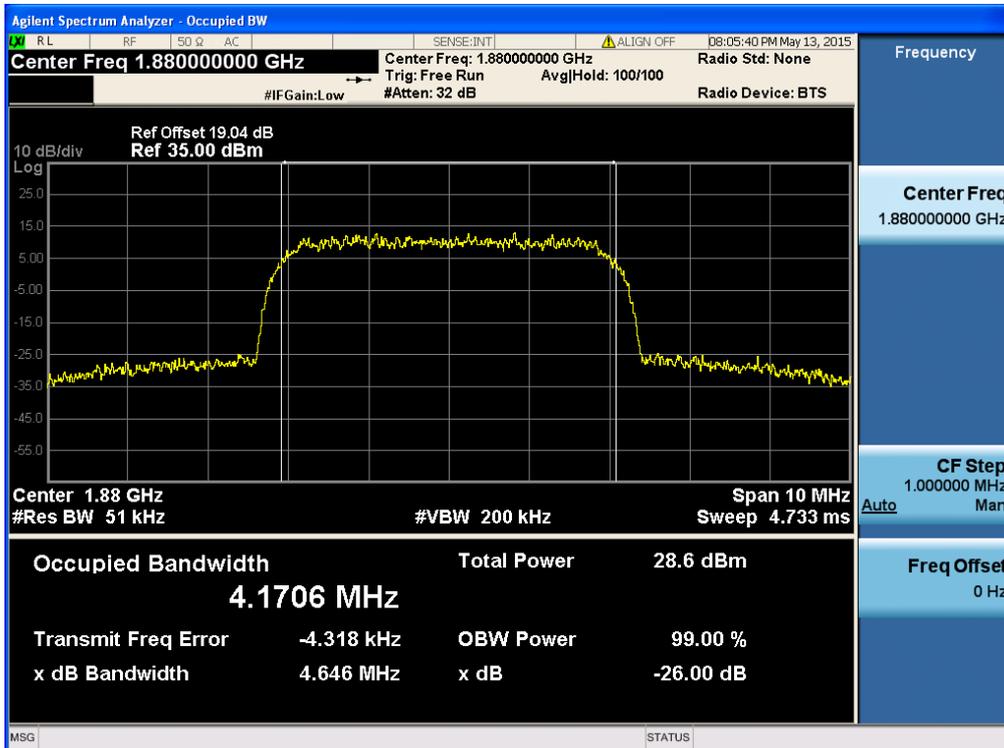


HSUPA1900 & Channel: 9538

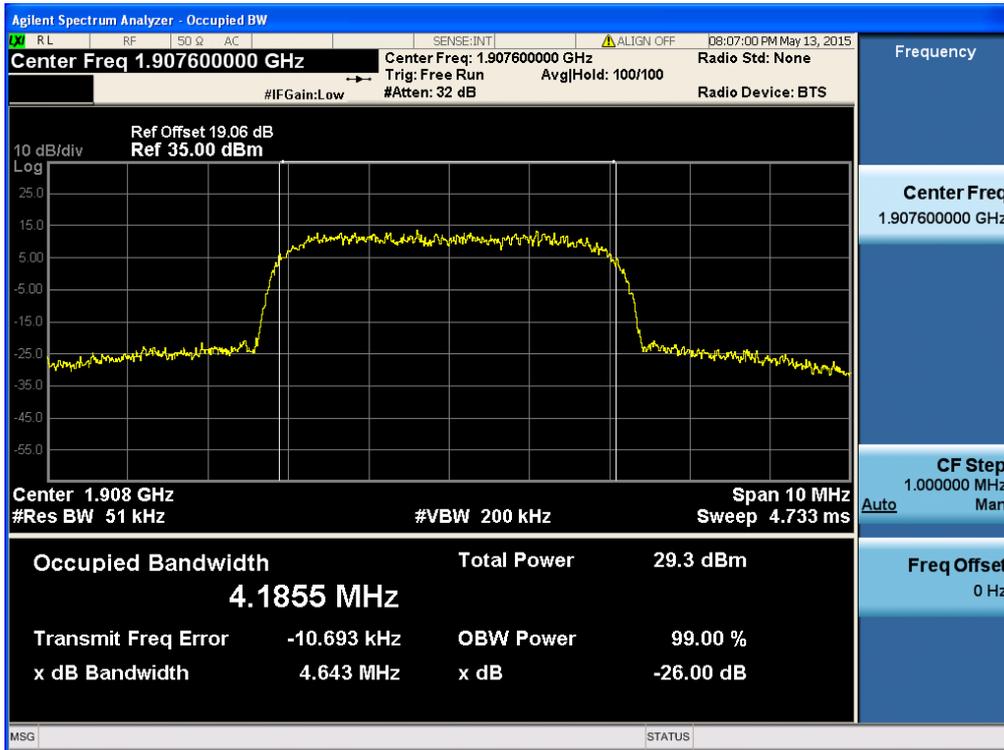


8.3 Spurious Emissions at Antenna Terminal


GSM850 & Channel: 128

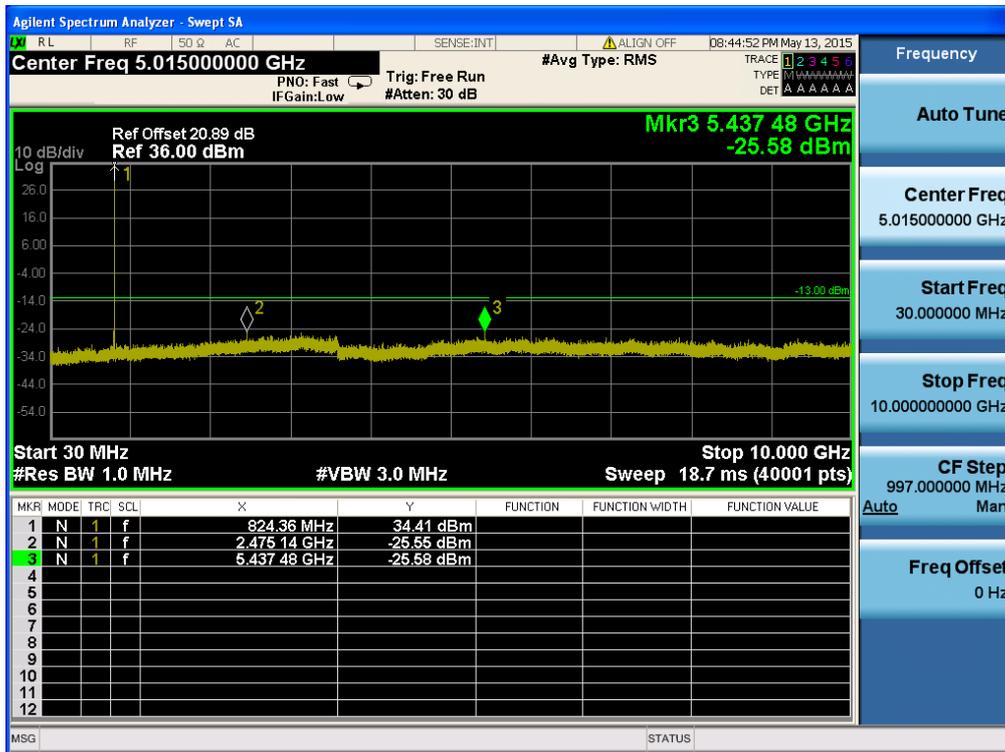


GSM850 & Channel: 190

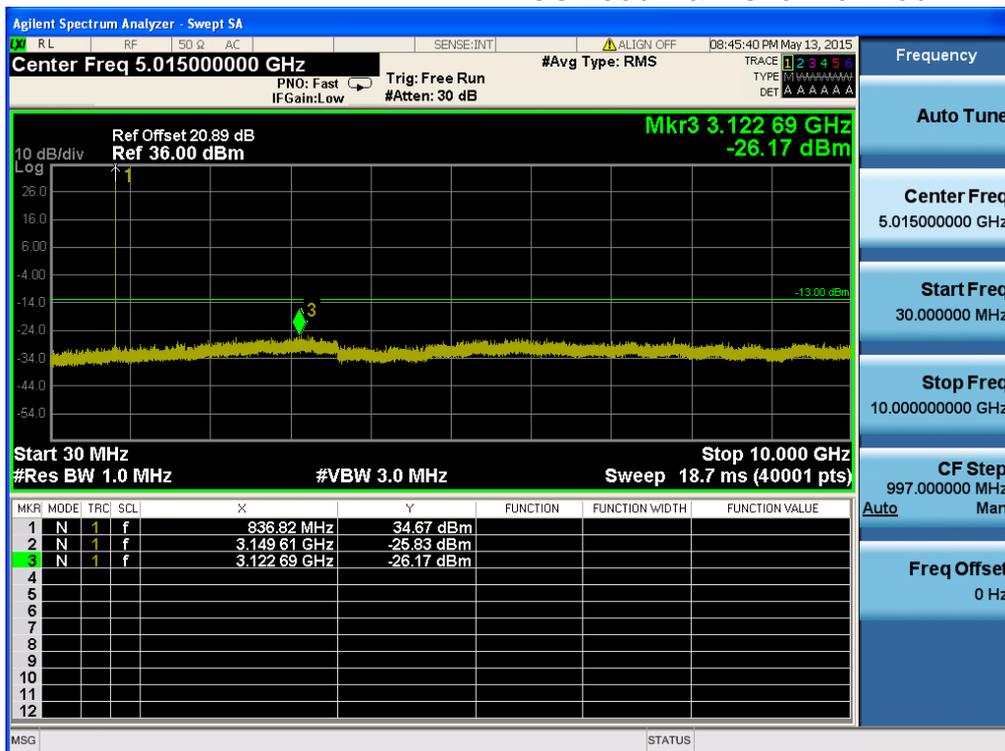


GSM850 & Channel: 251

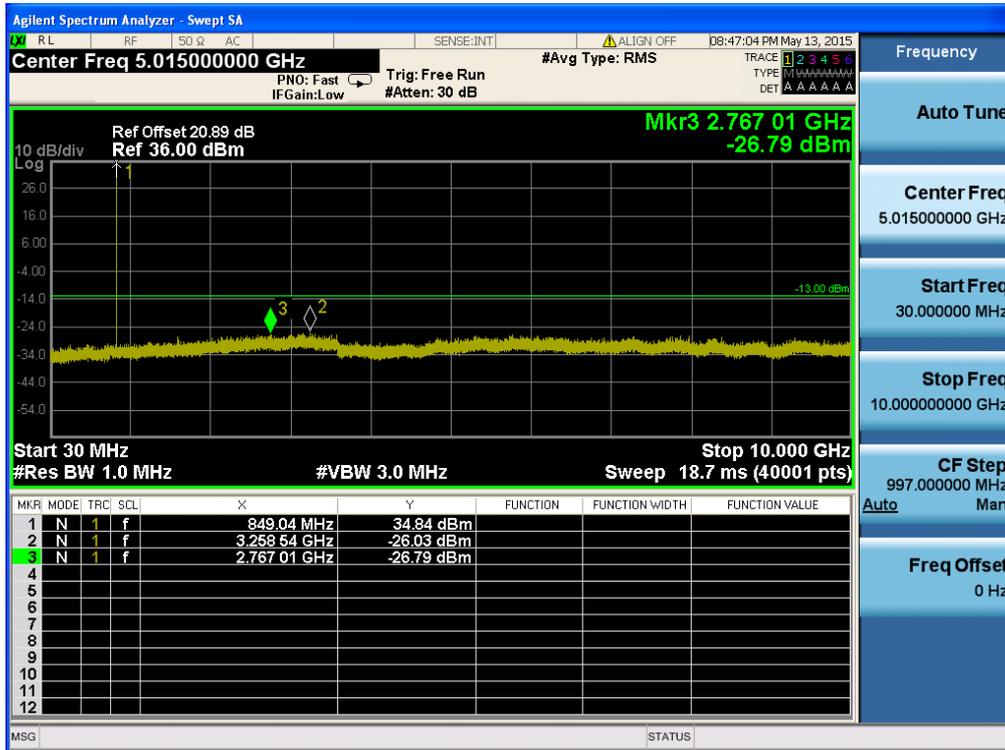


WCDMA850 & Channel: 4132

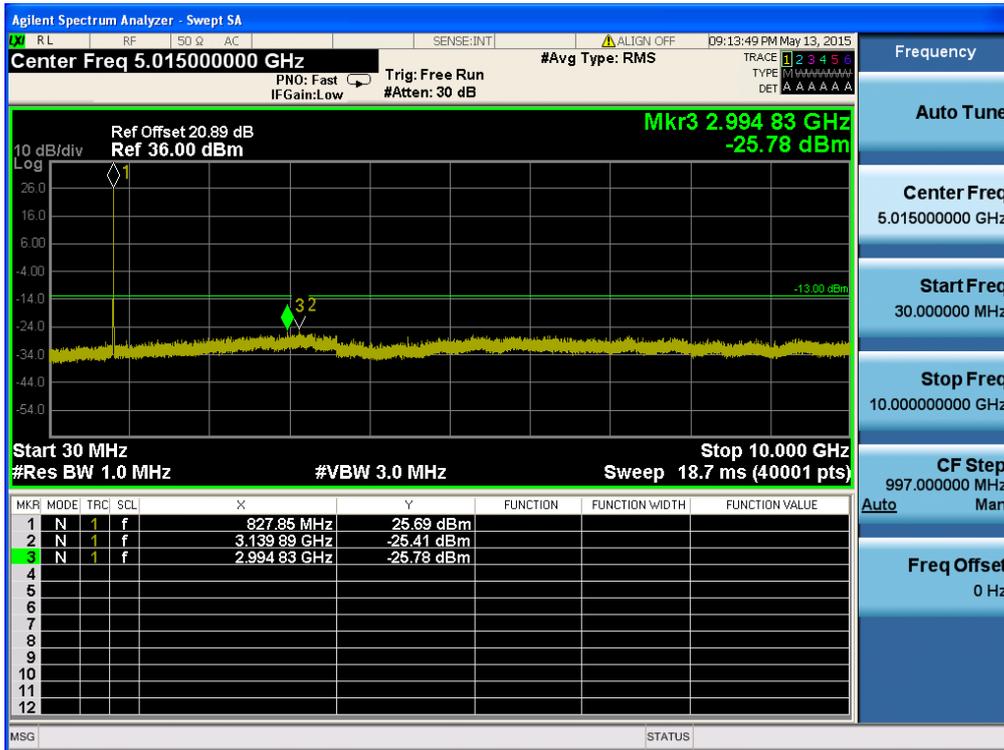


WCDMA850 & Channel: 4183

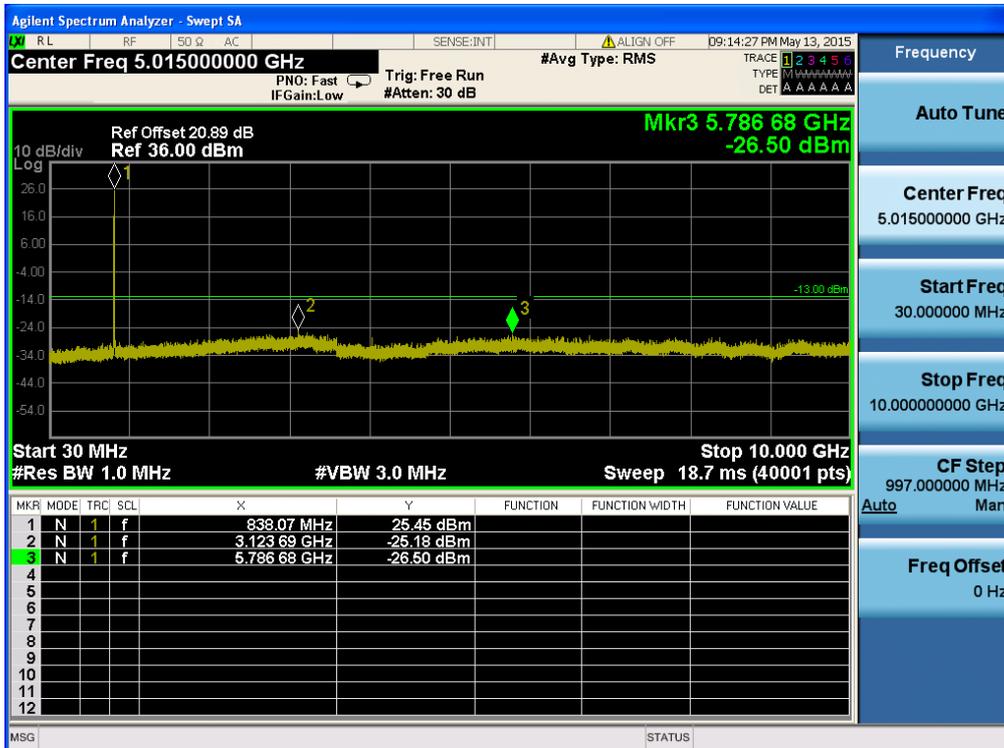


WCDMA850 & Channel: 4233

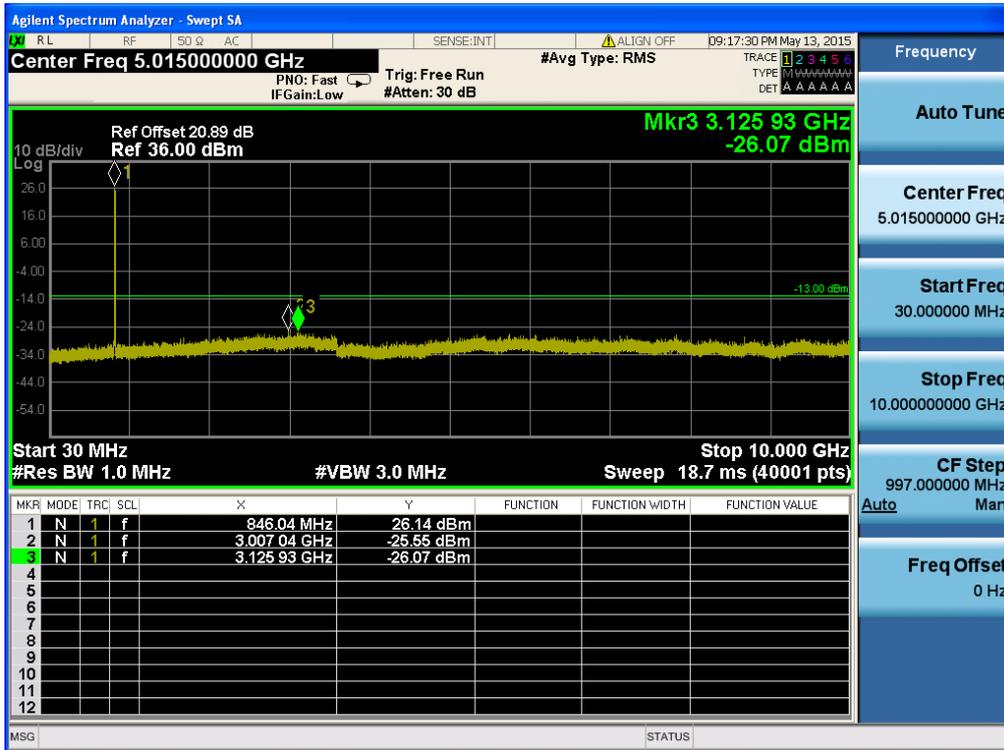


HSUPA850 & Channel: 4132

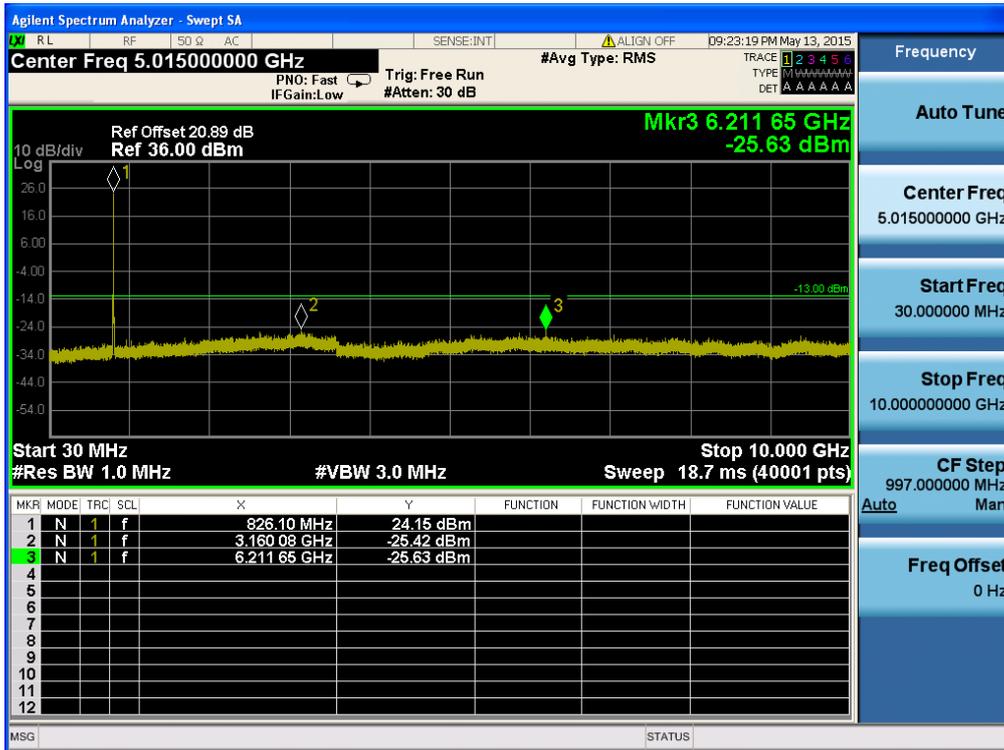


HSUPA850 & Channel: 4183

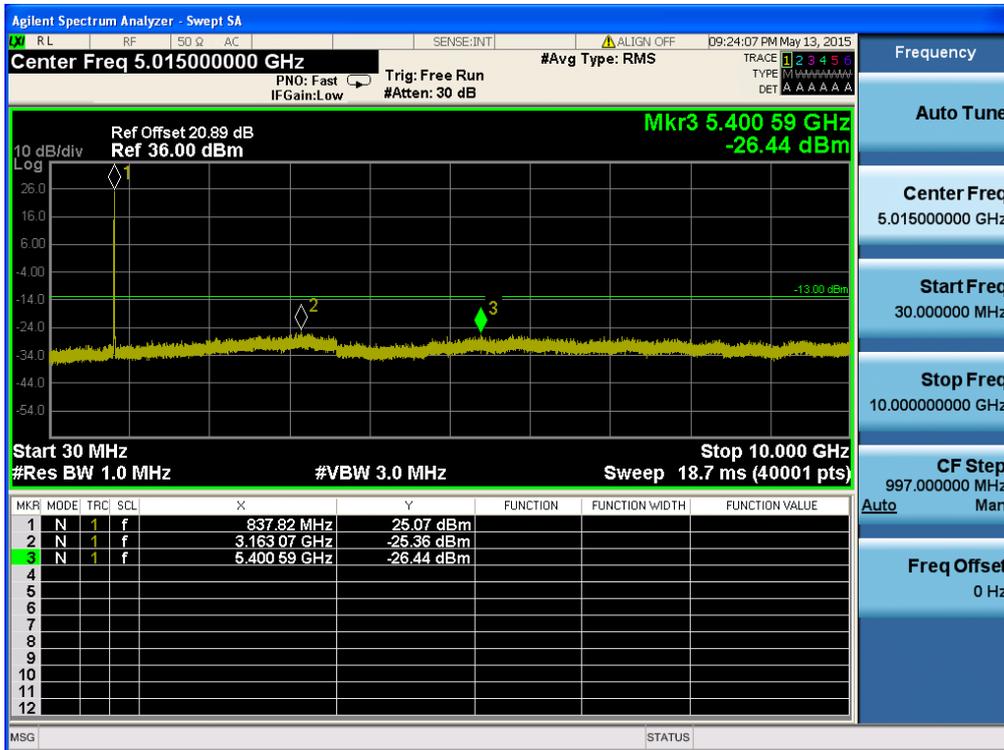


HSUPA850 & Channel: 4233

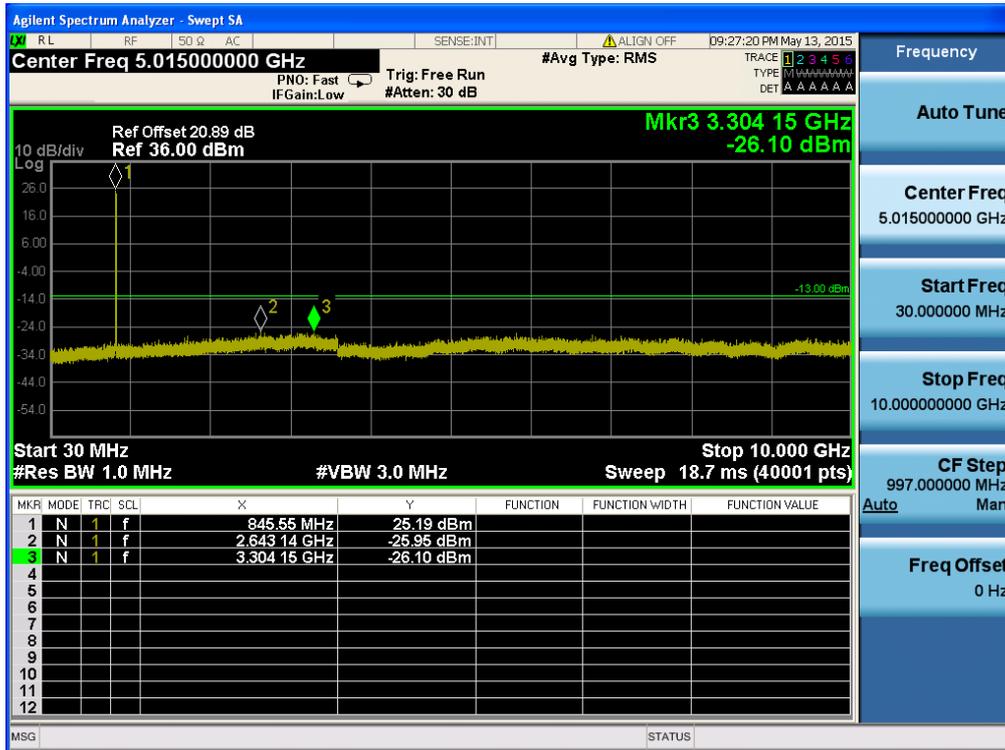


WCDMA1700 & Channel: 1312

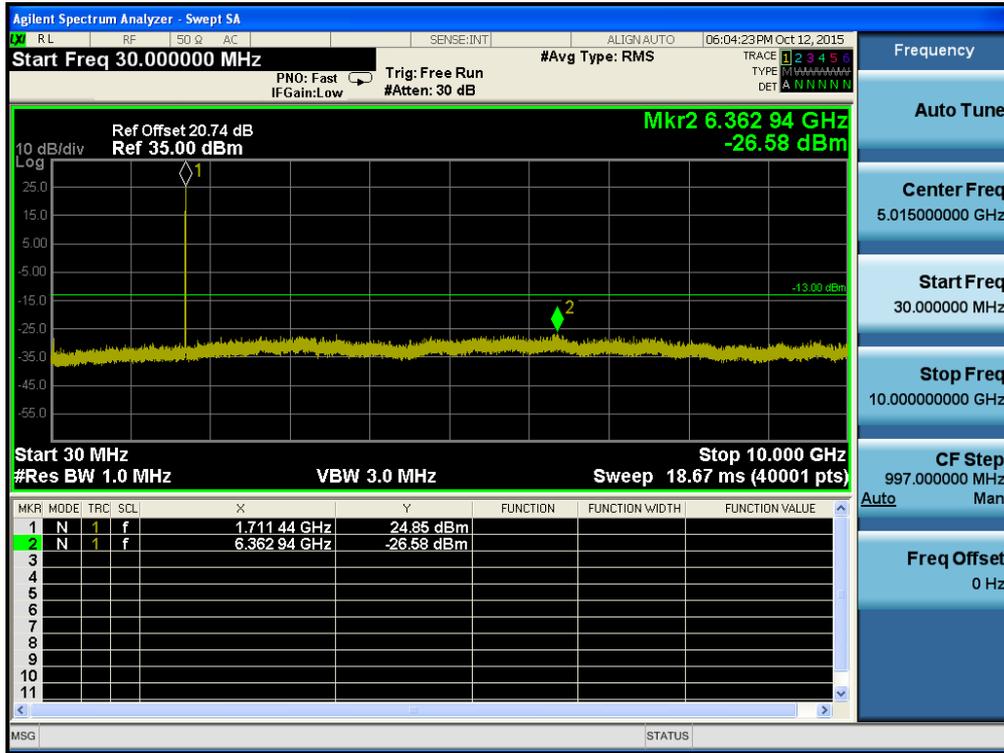


WCDMA1700 & Channel: 1312

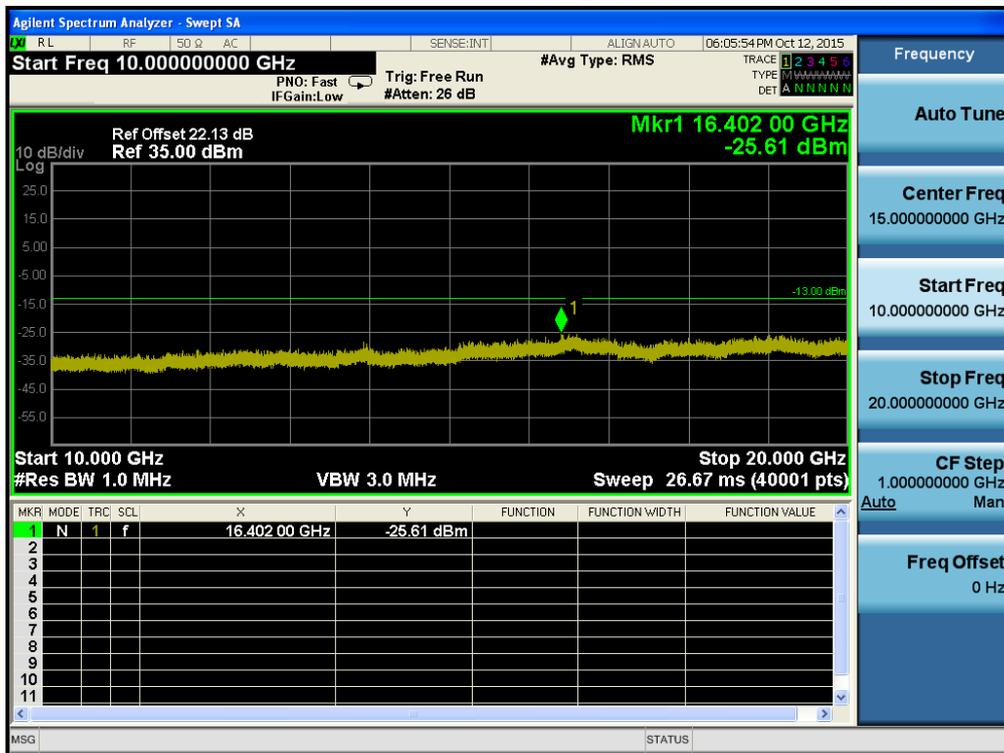


WCDMA1700 & Channel: 1412

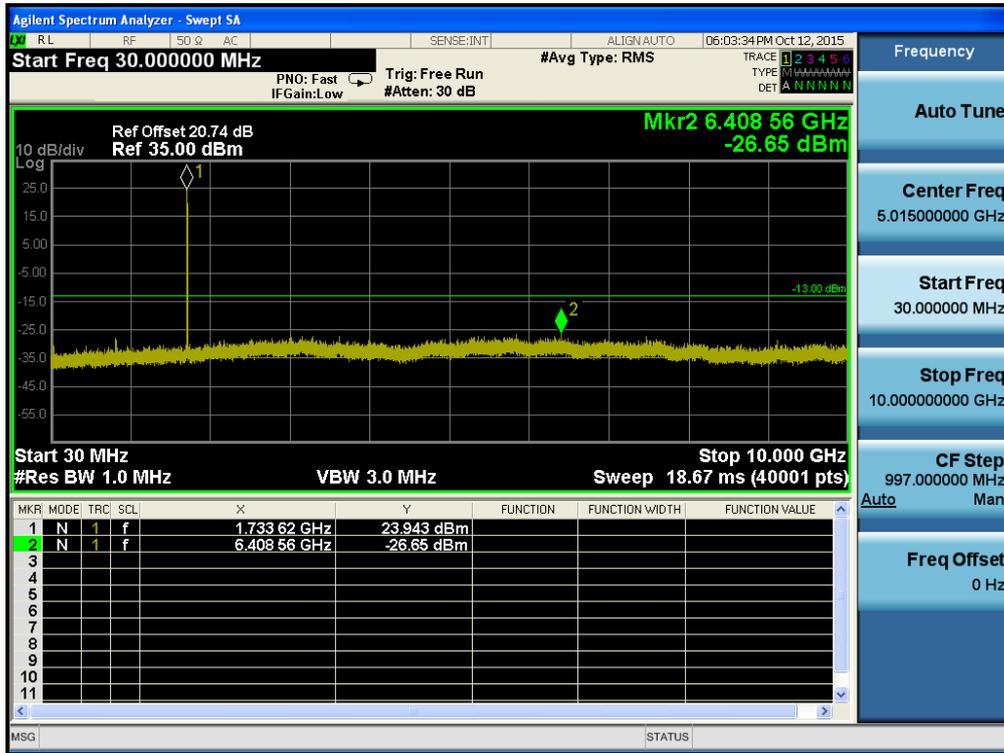


WCDMA1700 & Channel: 1412

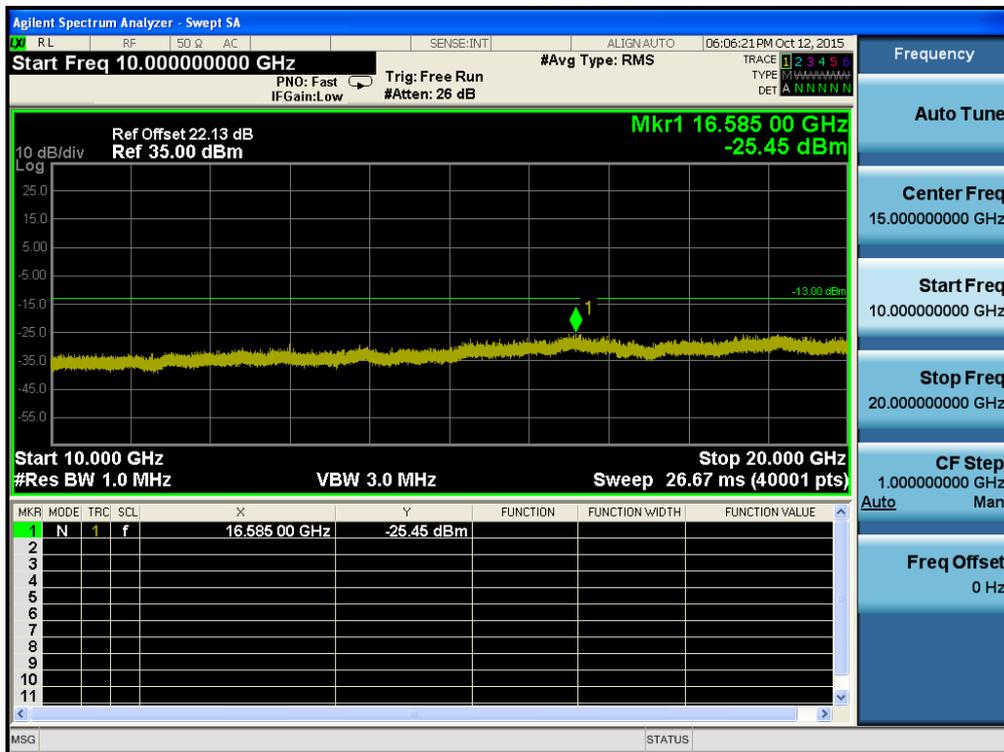


WCDMA1700 & Channel: 1513

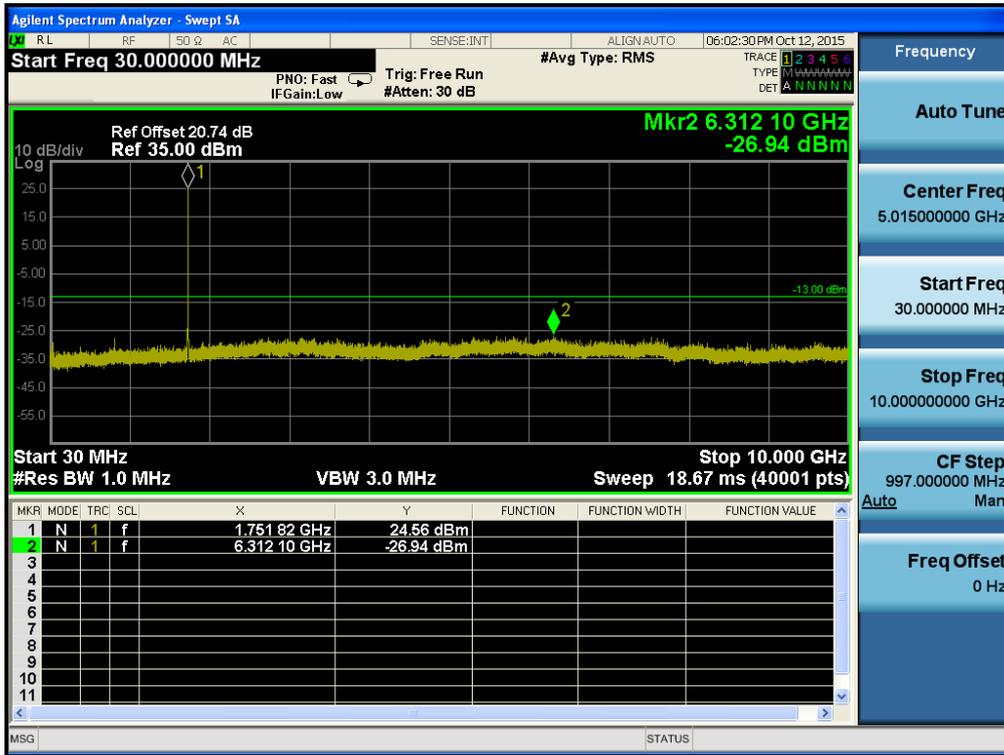


WCDMA1700 & Channel: 1513

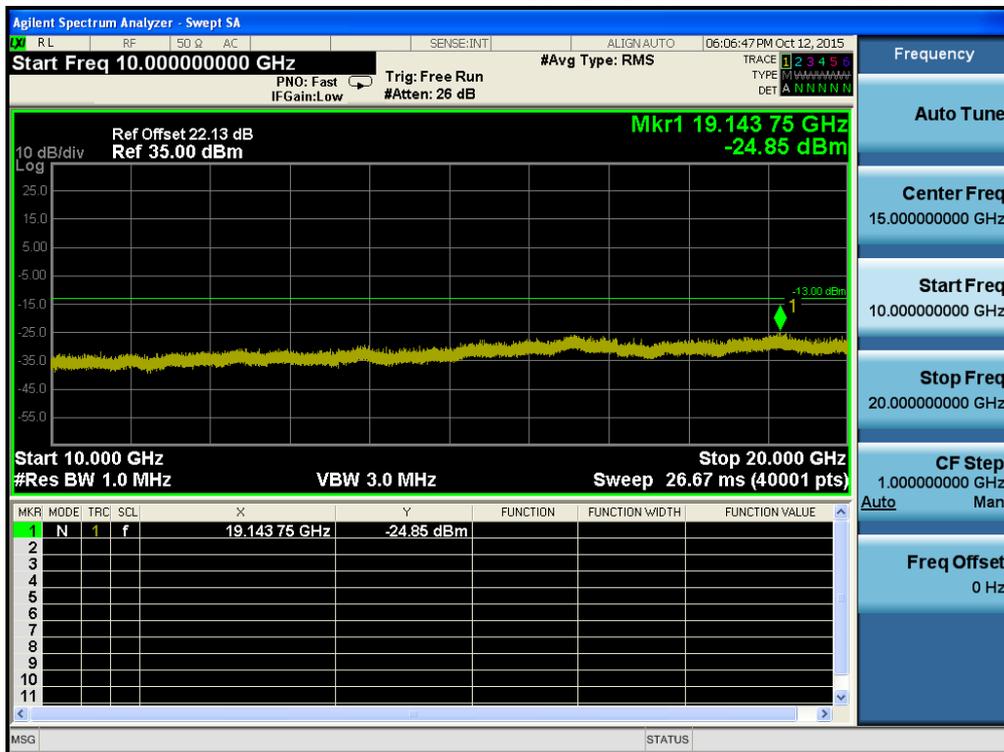


HSUPA1700 & Channel: 1312

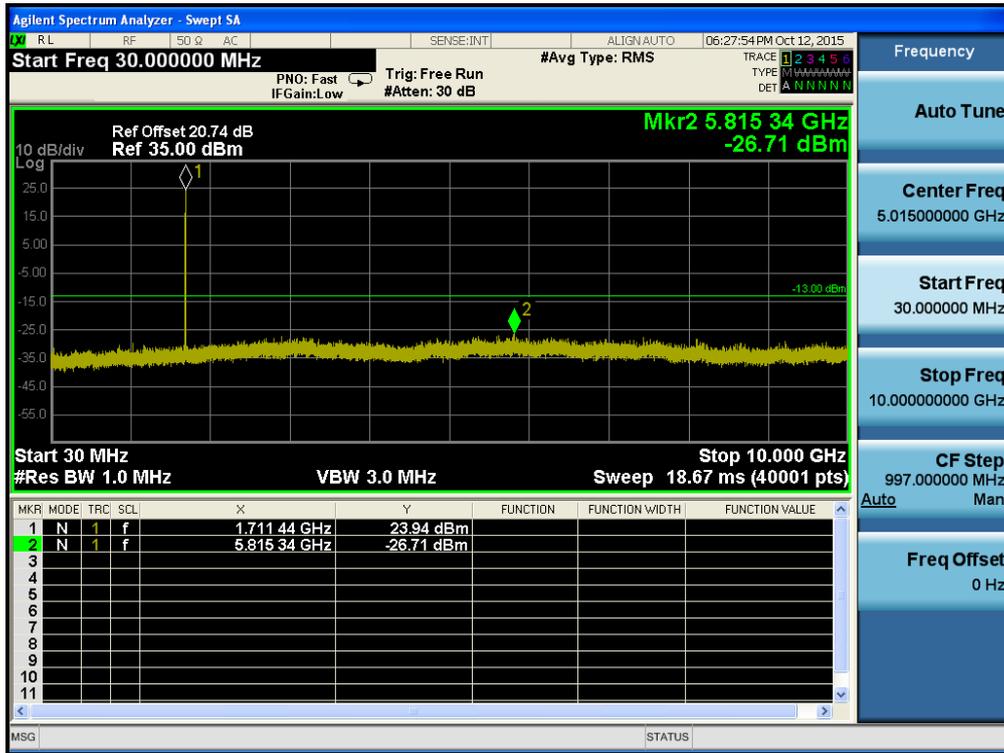


HSUPA 1900 & Channel: 1312

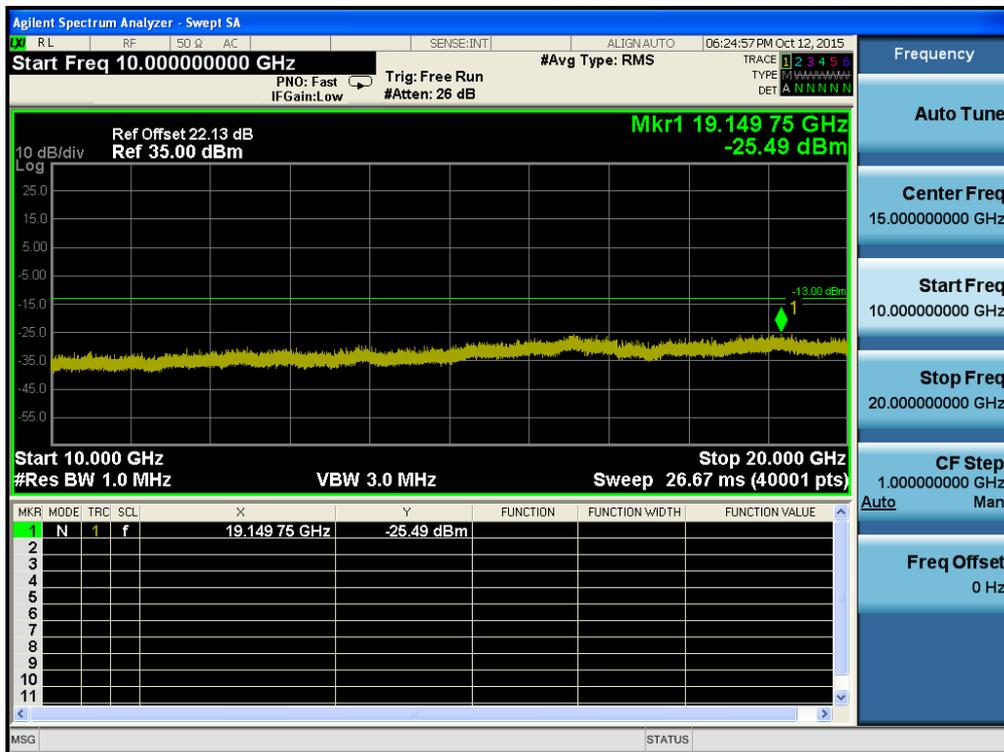


HSUPA1700 & Channel: 1412

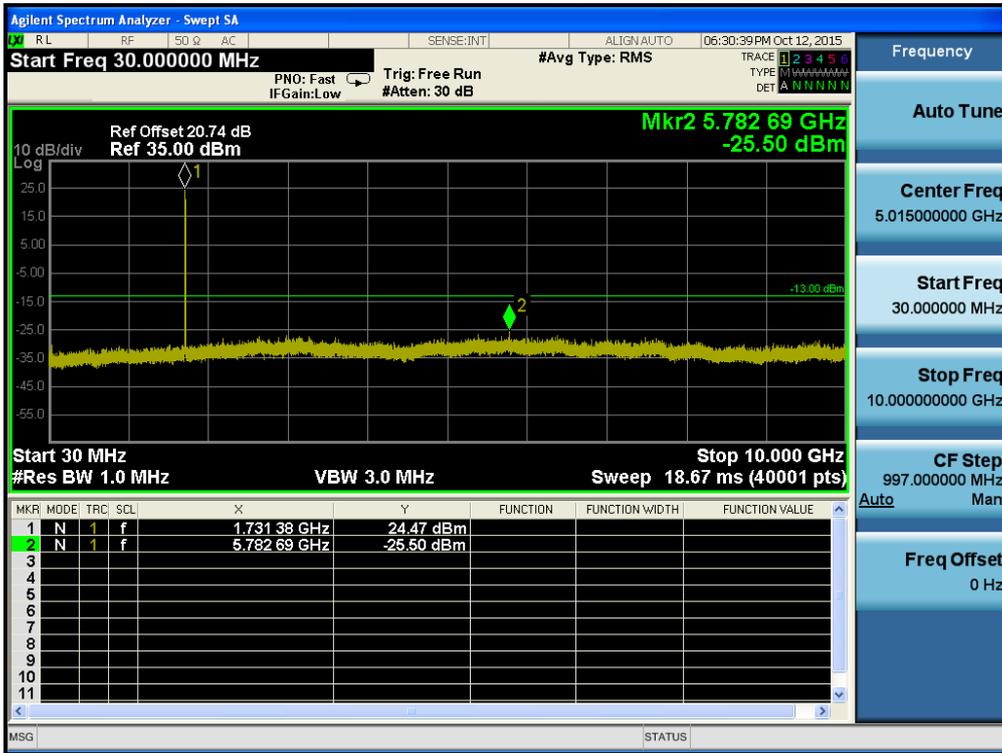


HSUPA1700 & Channel: 1412

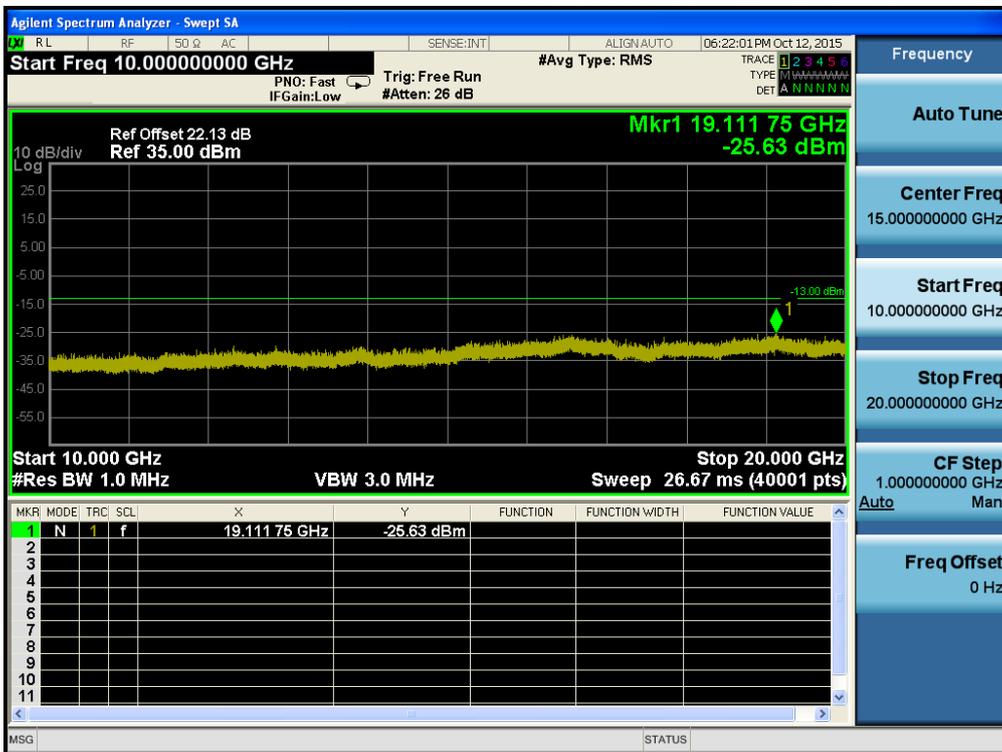


HSUPA1700 & Channel: 1513

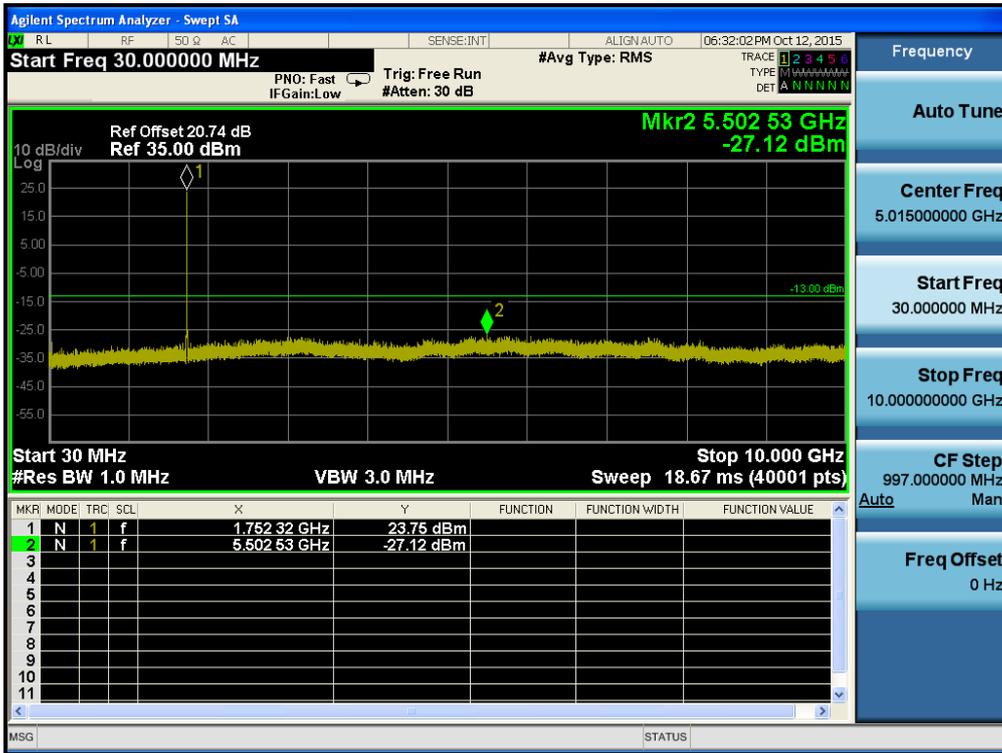


HSUPA1700 & Channel: 1513

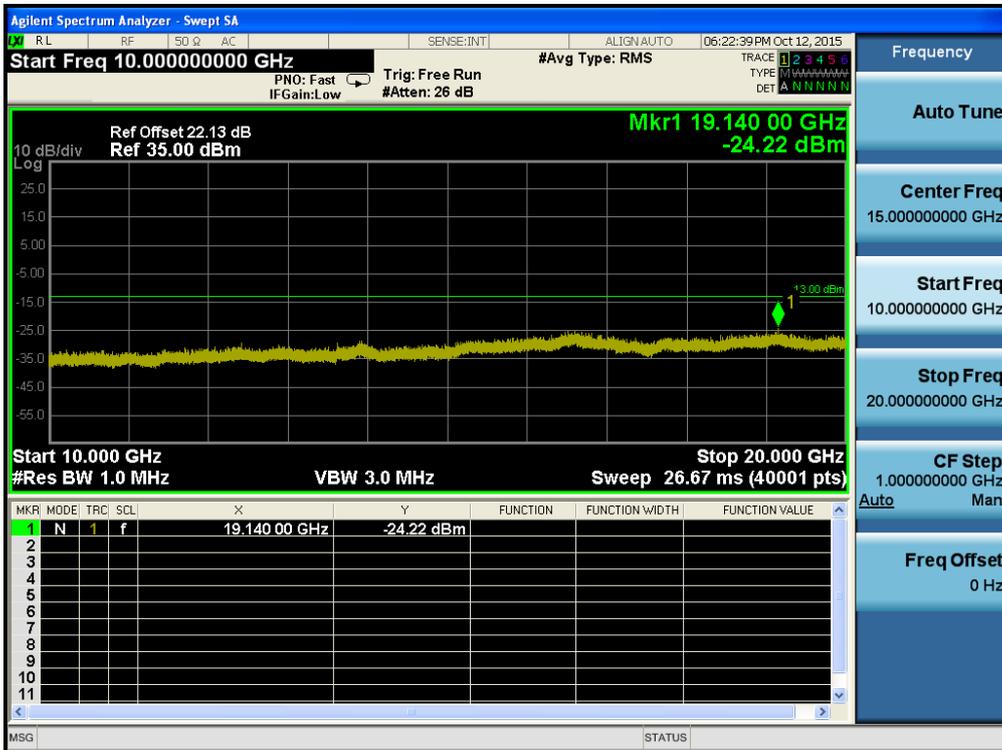


GSM1900 & Channel: 512

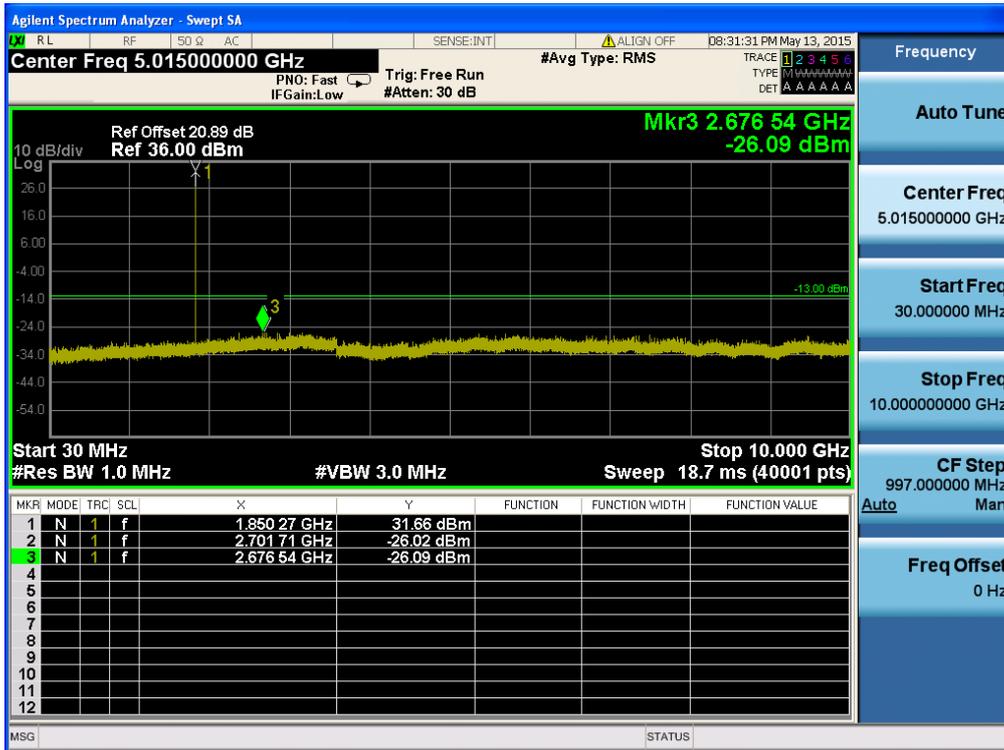


GSM1900 & Channel: 512

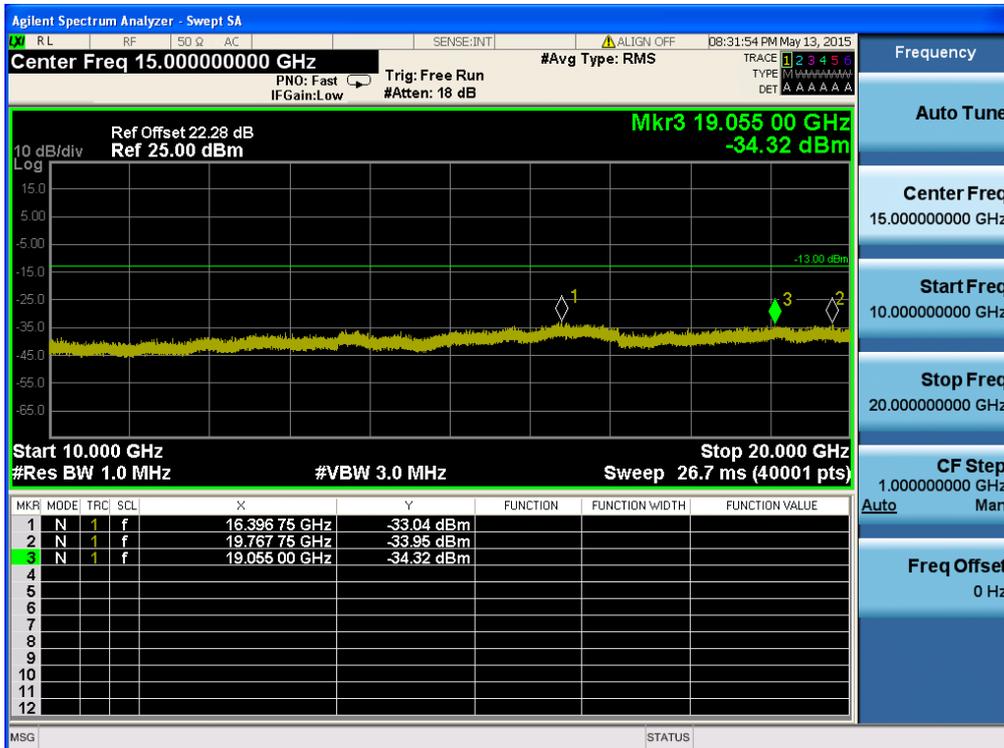


GSM1900 & Channel: 661

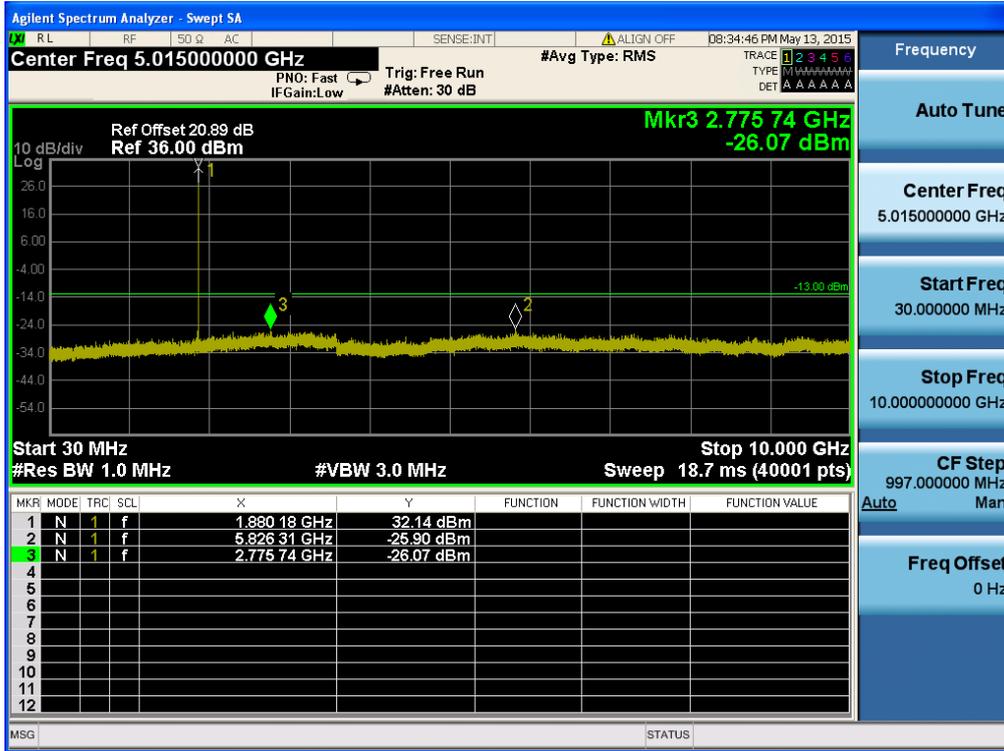


GSM1900 & Channel: 661

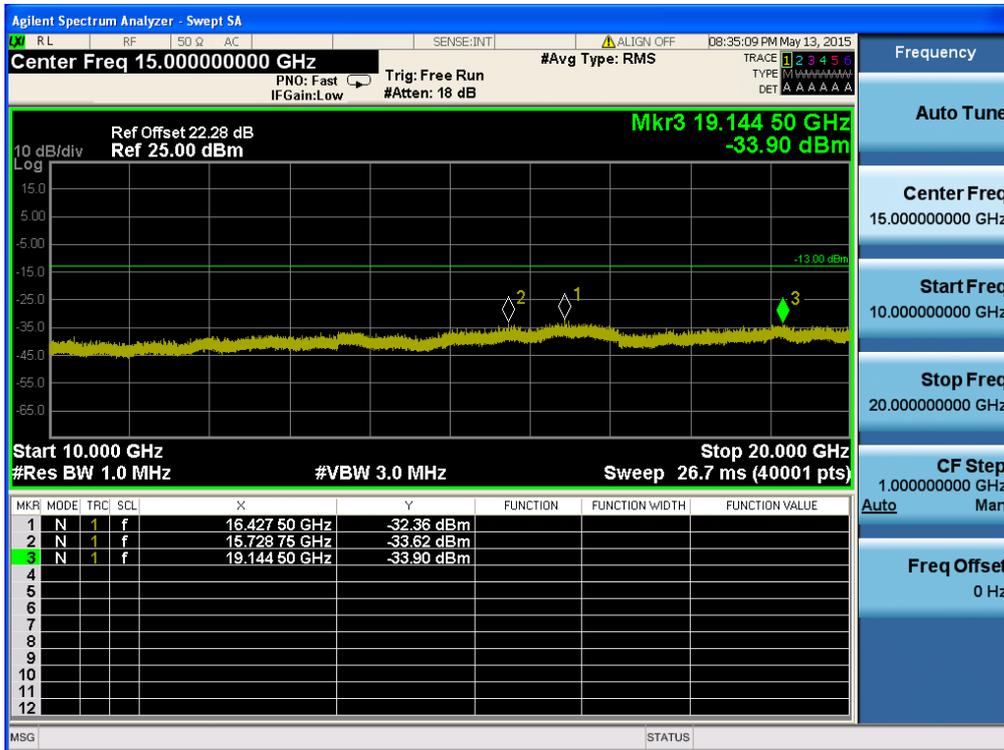


GSM1900 & Channel: 810

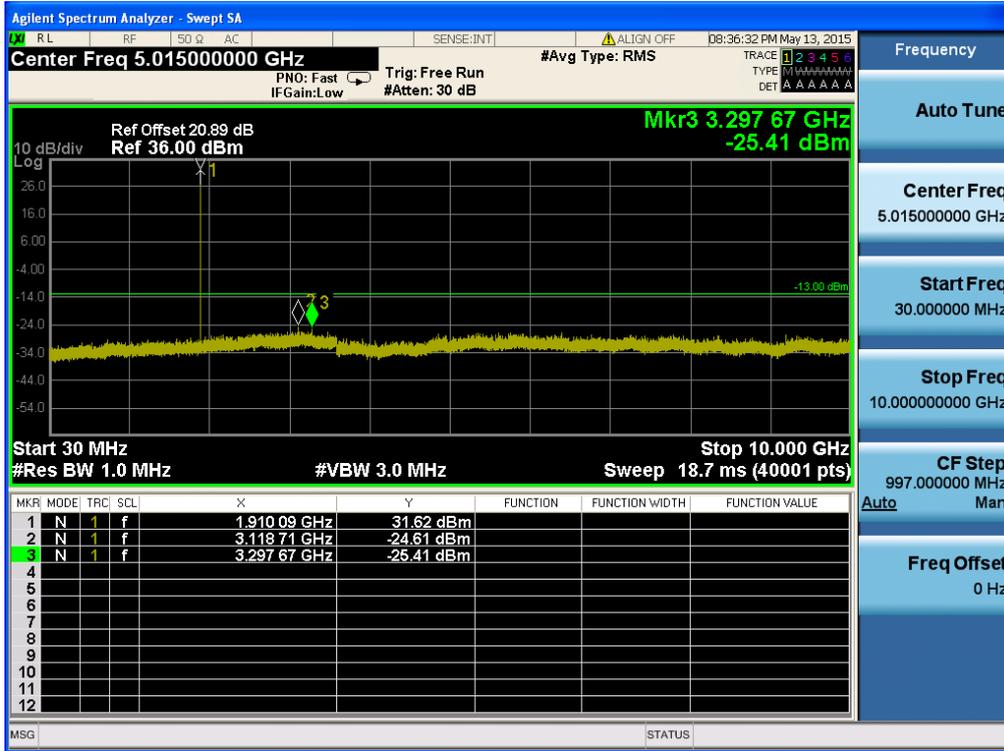


GSM1900 & Channel: 810

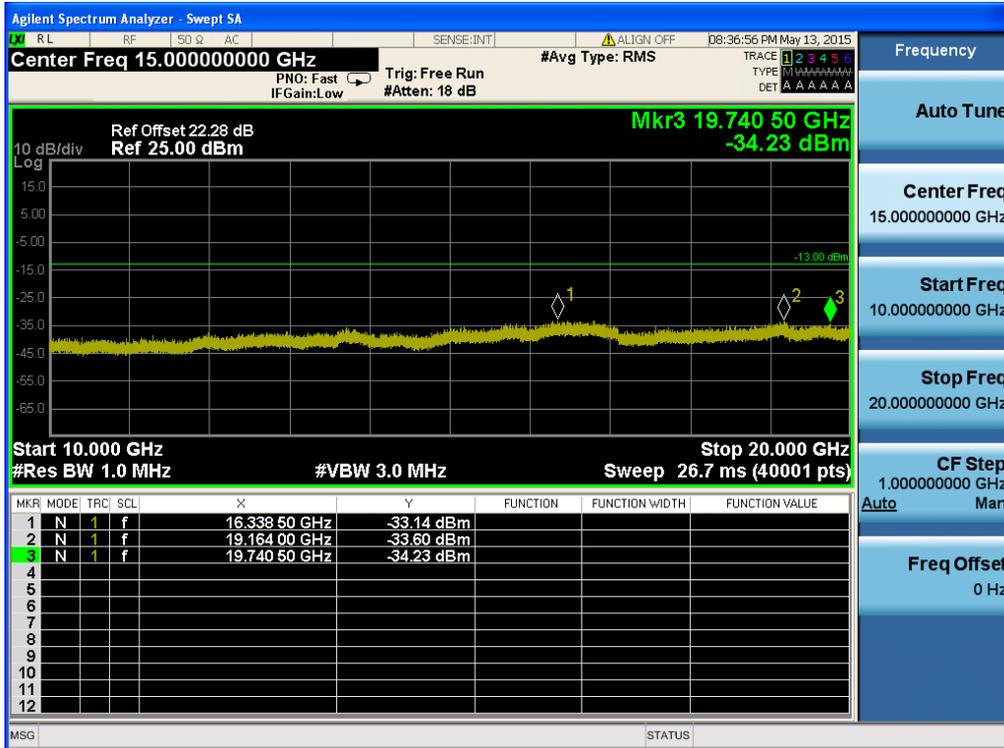


WCDMA1900 & Channel: 9262

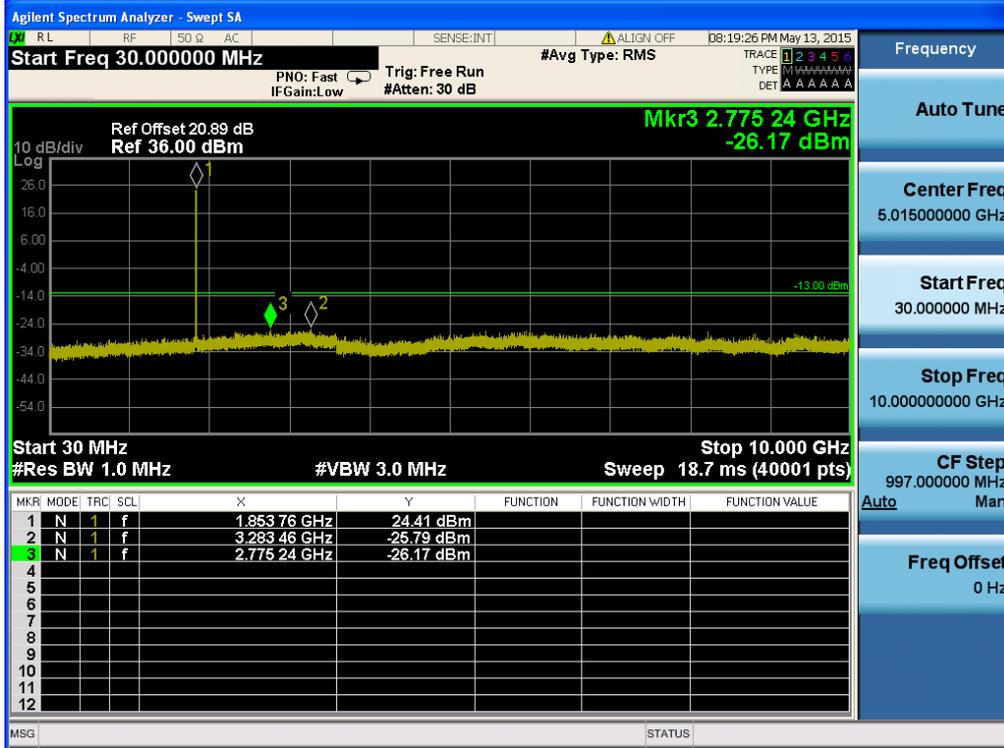


WCDMA1900 & Channel: 9262

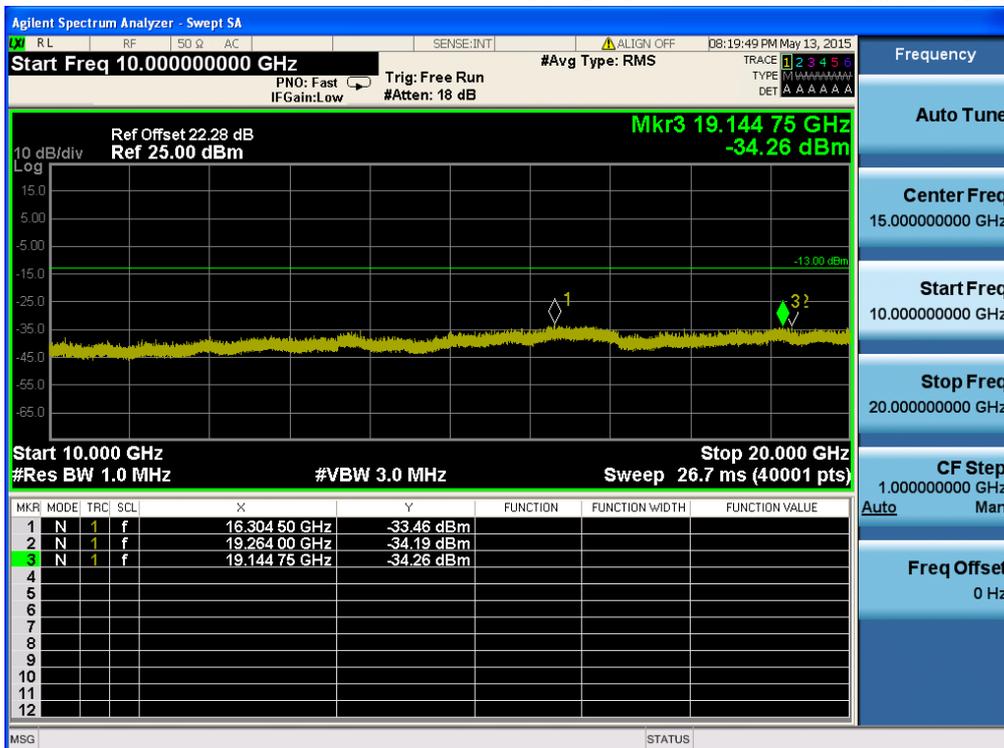


WCDMA1900 & Channel: 9400

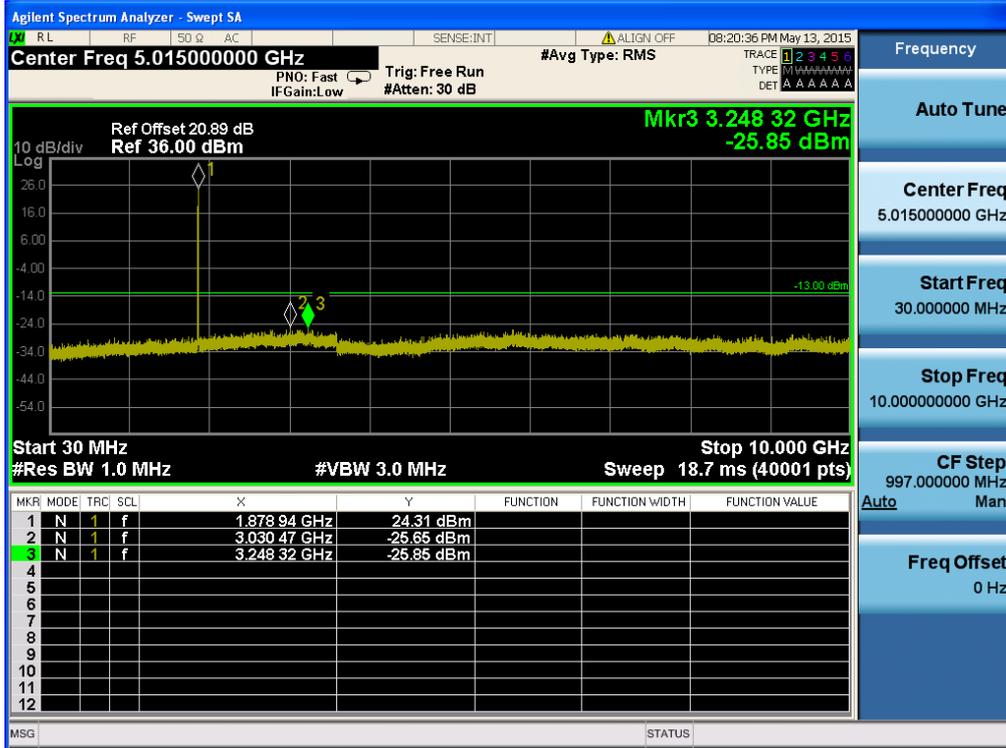


WCDMA1900 & Channel: 9400

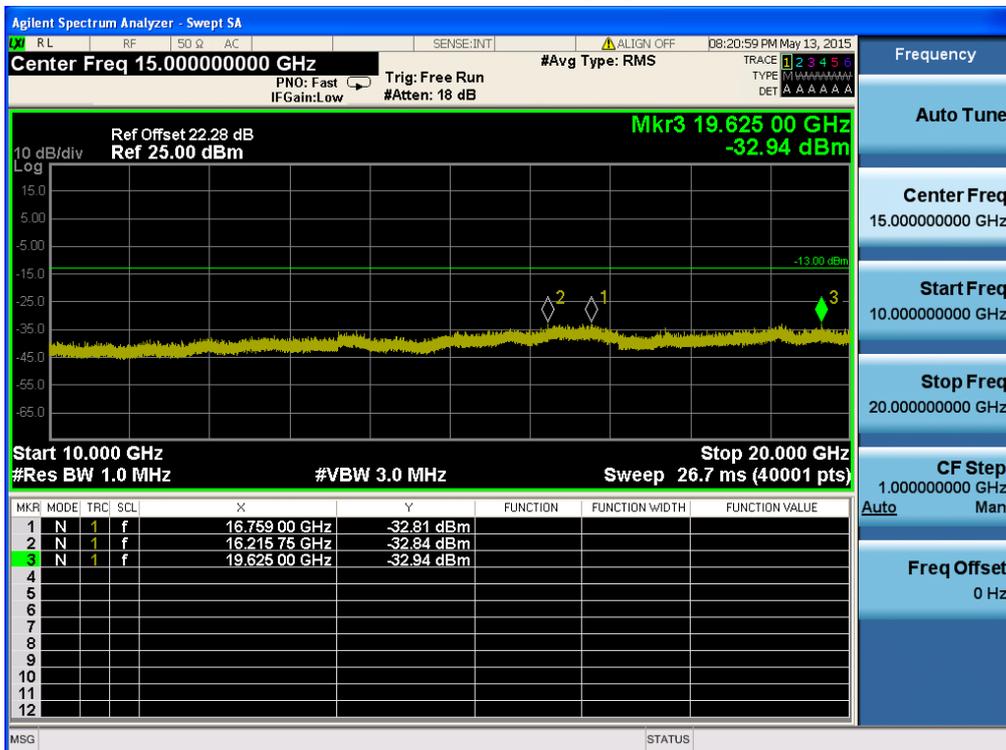


WCDMA1900 & Channel: 9538

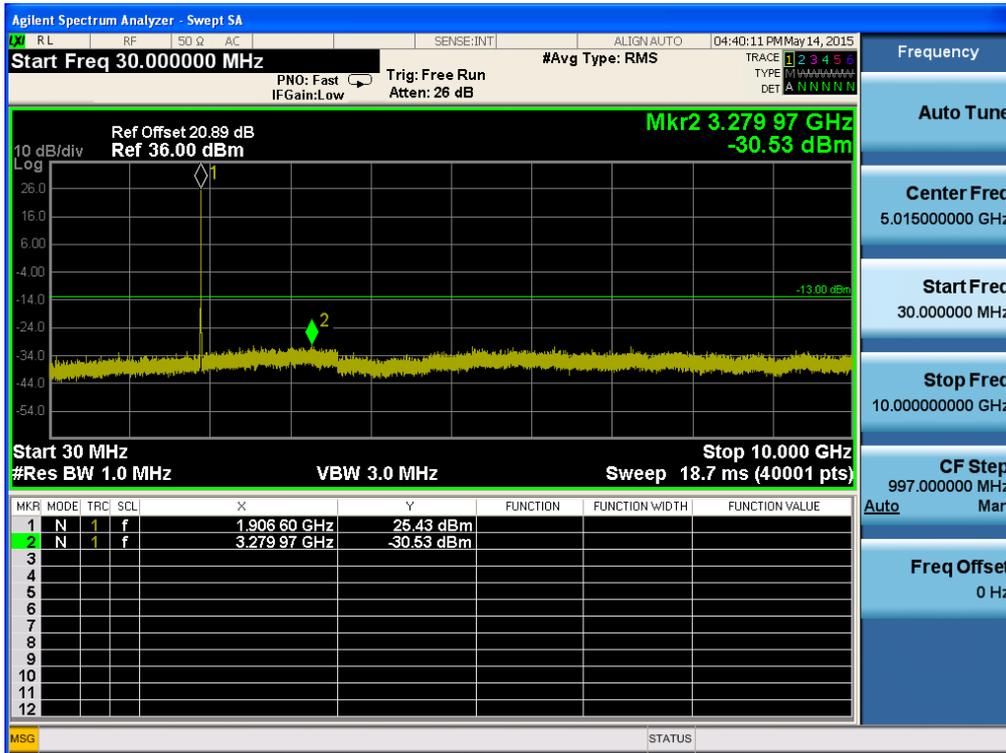


WCDMA1900 & Channel: 9538

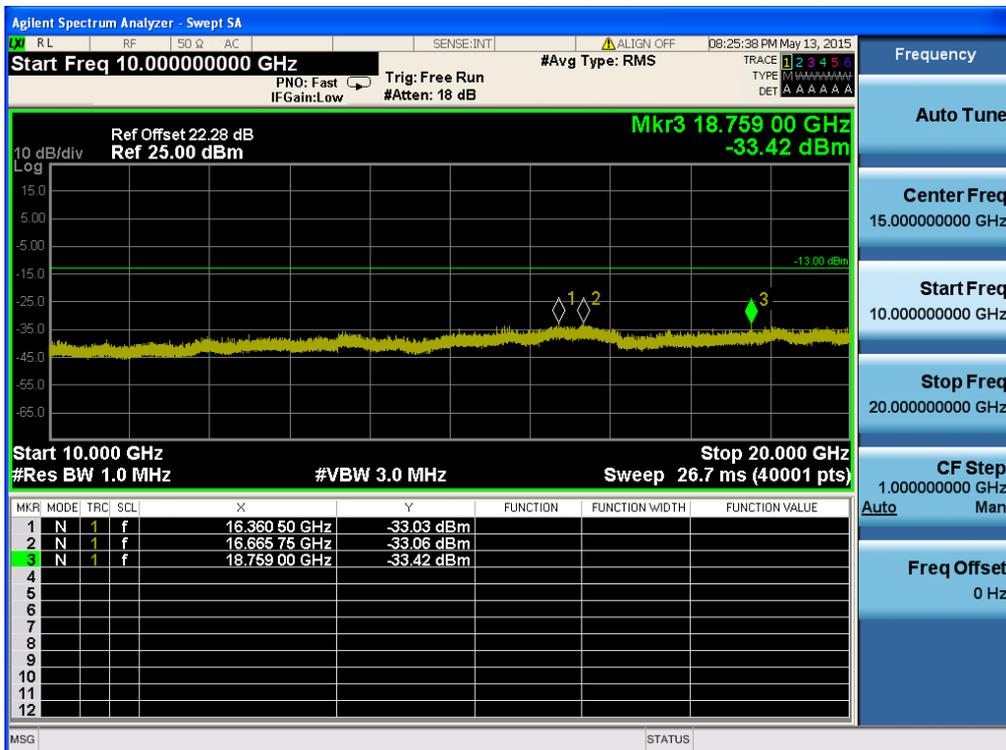


HSUPA1900 & Channel: 9262

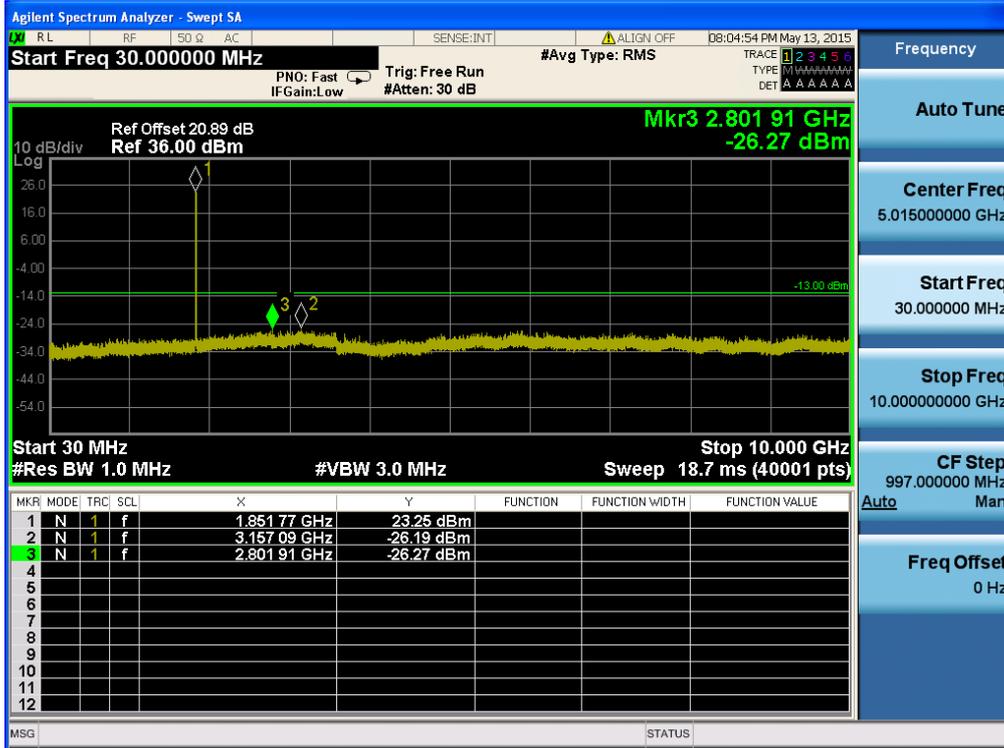


HSUPA 1900 & Channel: 9262

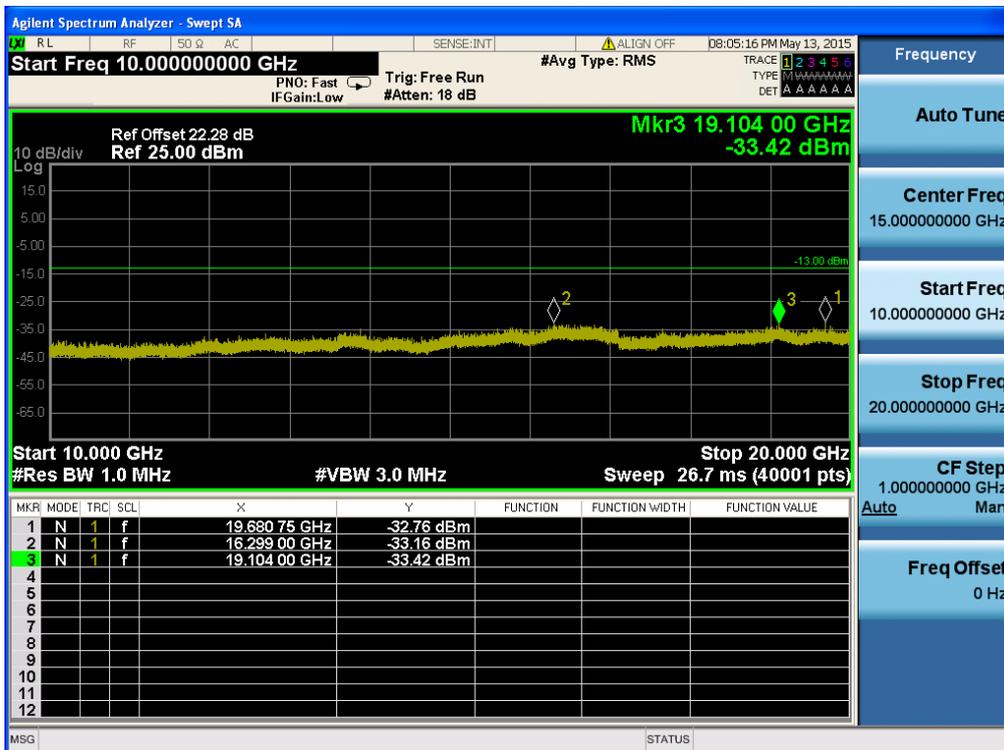


HSUPA1900 & Channel: 9400

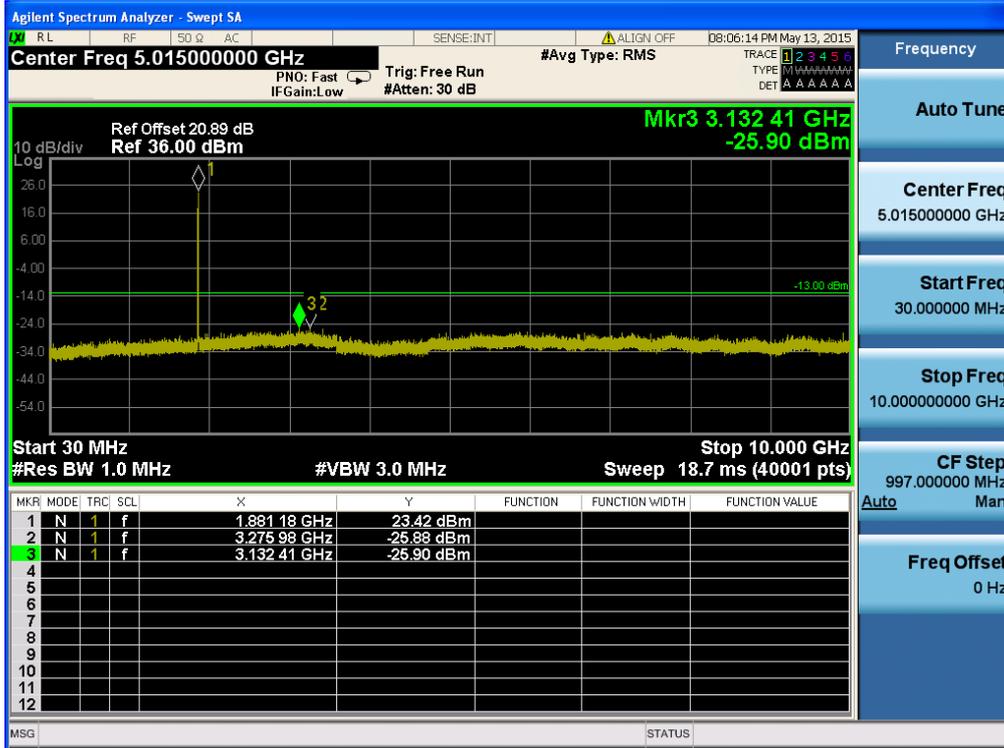


HSUPA1900 & Channel: 9400

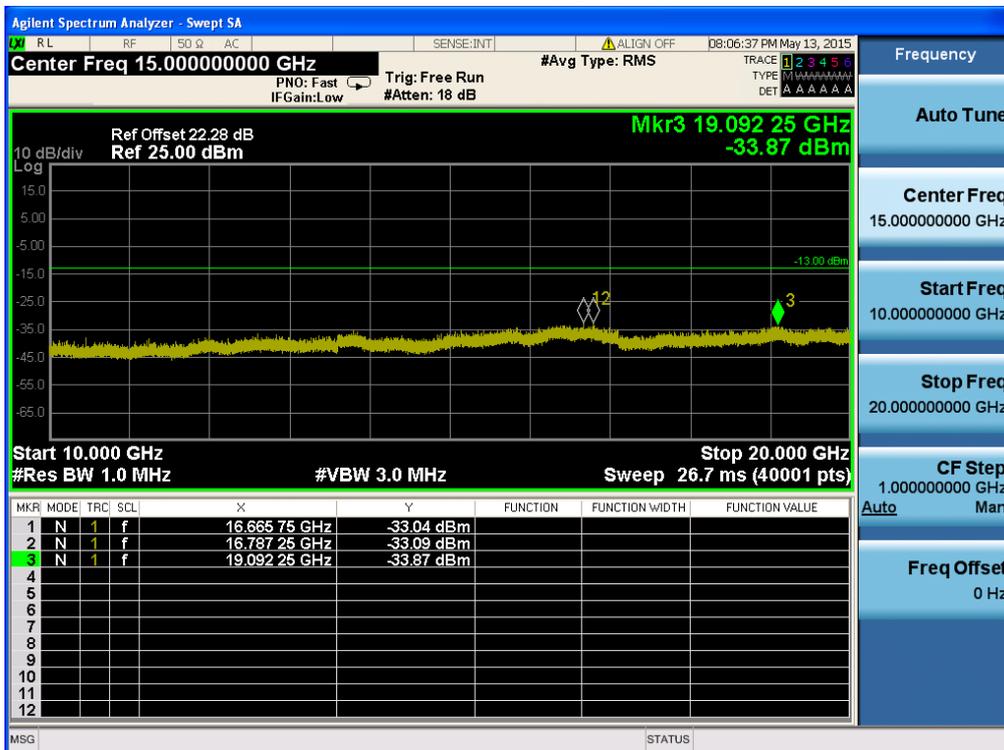

HSUPA1900 & Channel: 9538

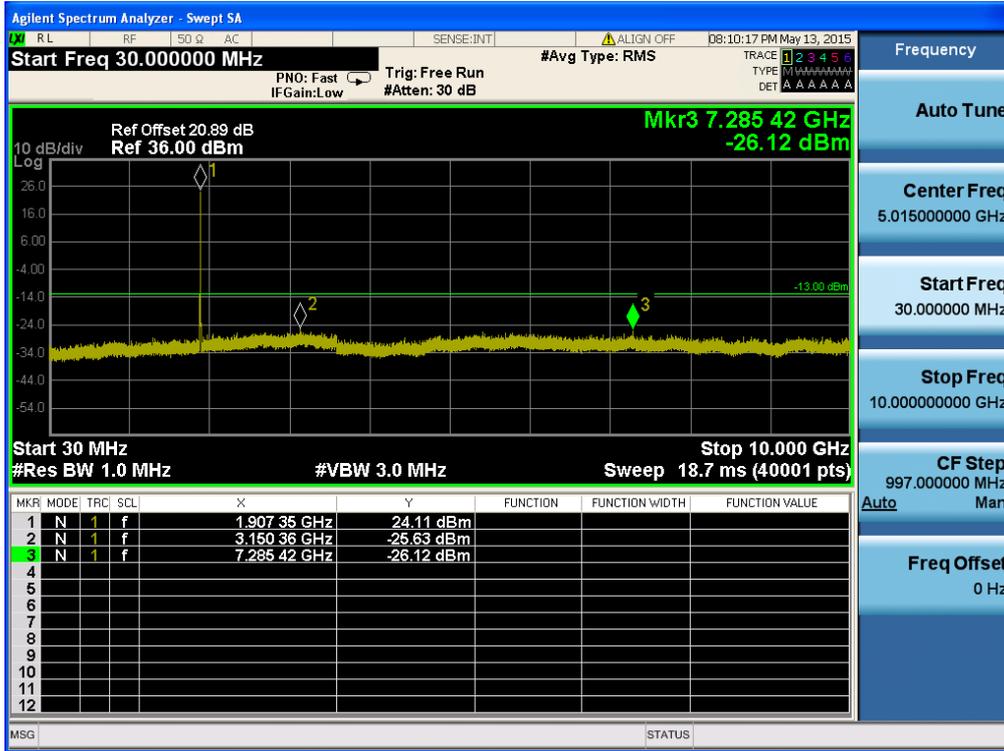


HSUPA1900 & Channel: 9538

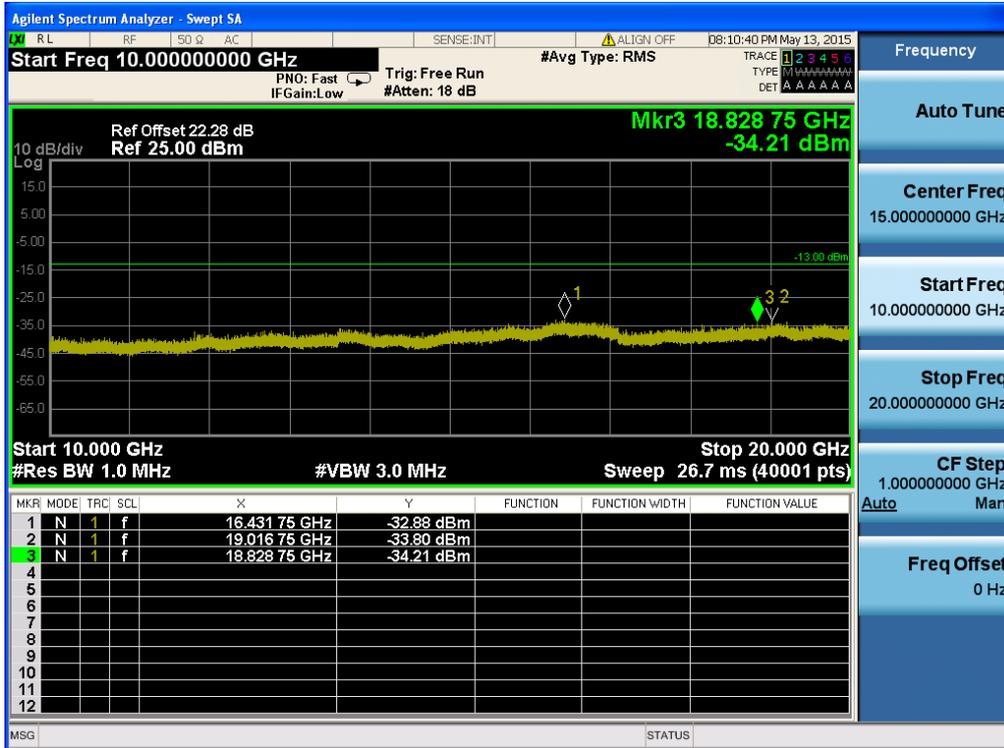


8.4 Band Edge


GSM850 & Channel: 128

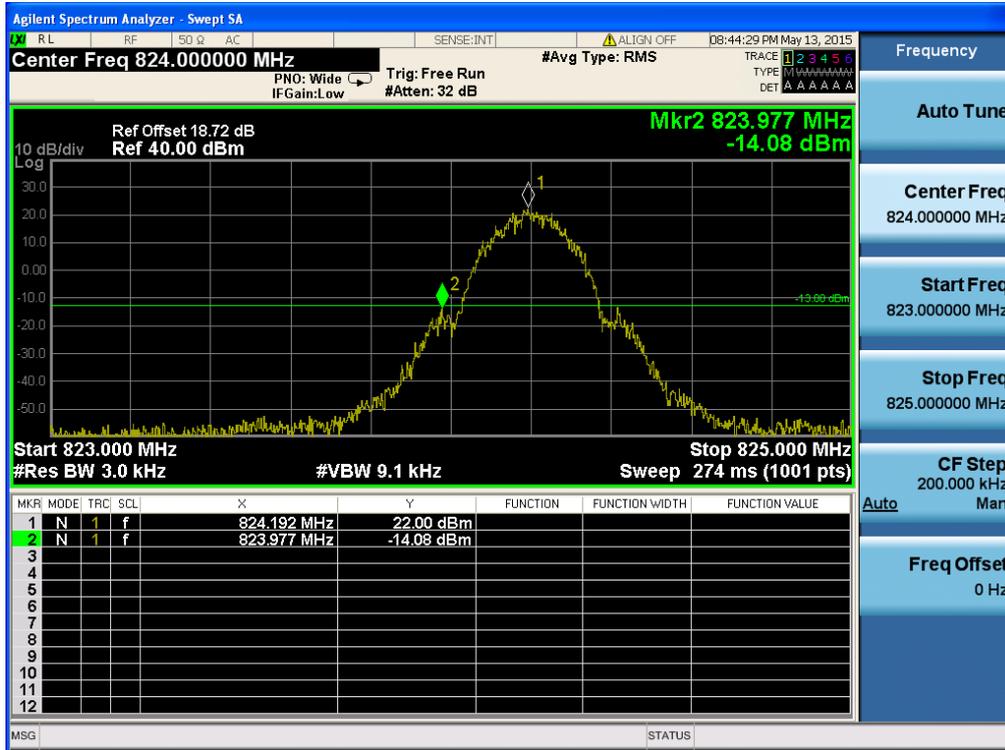

GSM850 & Channel: 251

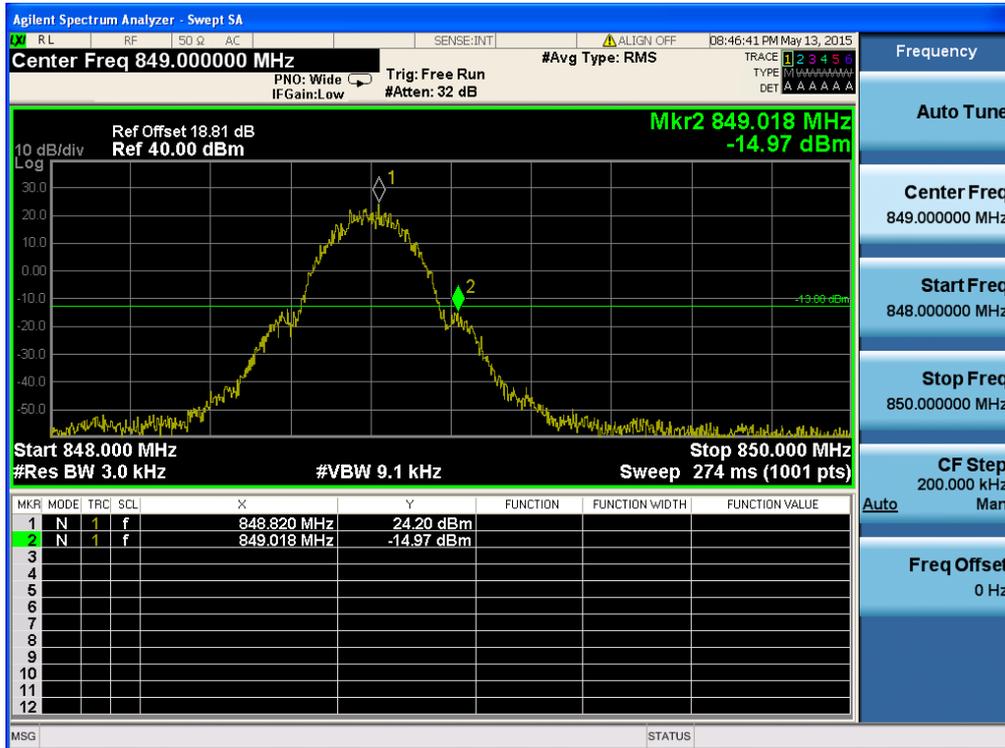


EDGE 850 & Channel: 128

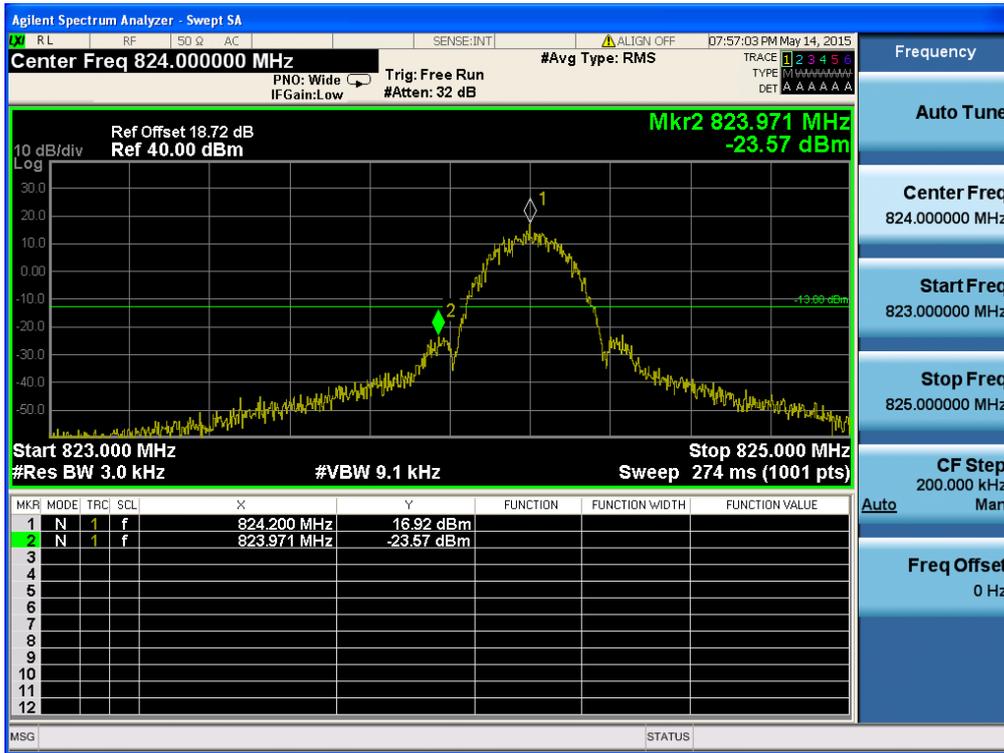

EDGE 850 & Channel: 251



WCDMA850& Channel: 4132

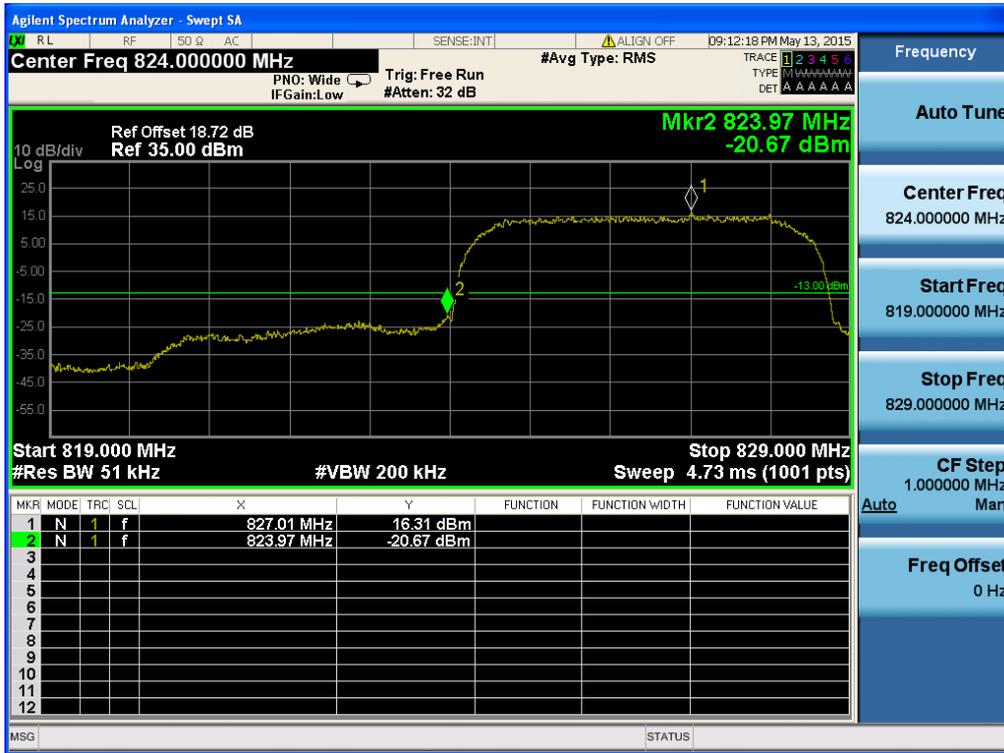

WCDMA850& Channel: 4132




WCDMA850& Channel: 4233



WCDMA850& Channel: 4233



HSUPA850& Channel: 4132

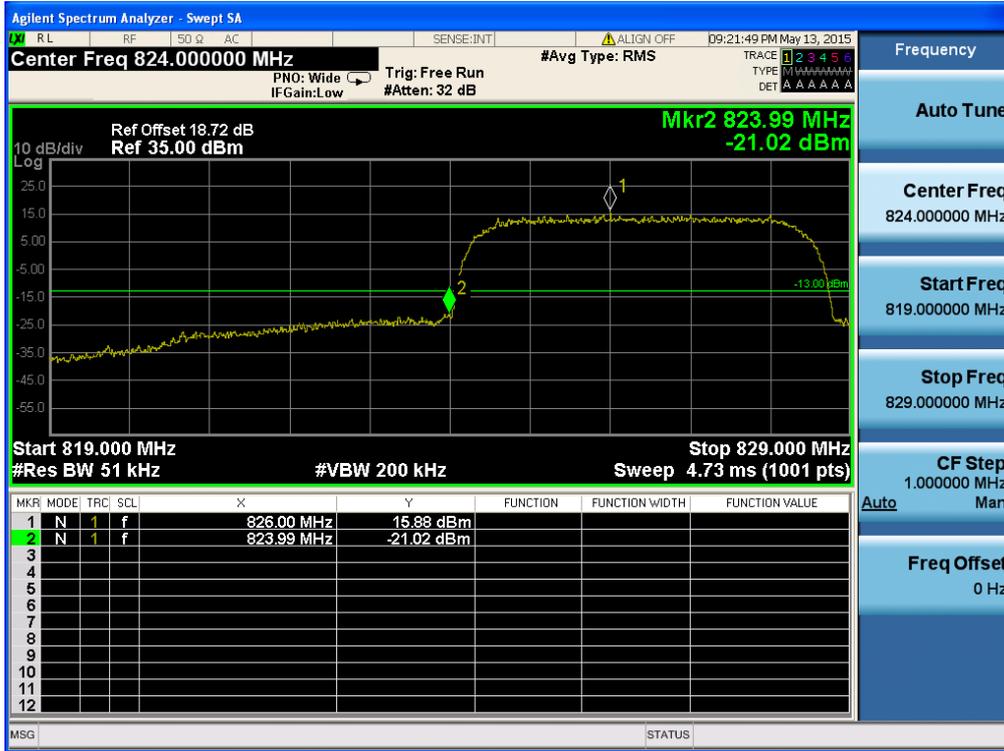

HSUPA850 & Channel: 4132




HSUPA850 & Channel: 4233



HSUPA850 & Channel: 4233




WCDMA1700 & Channel: 1312

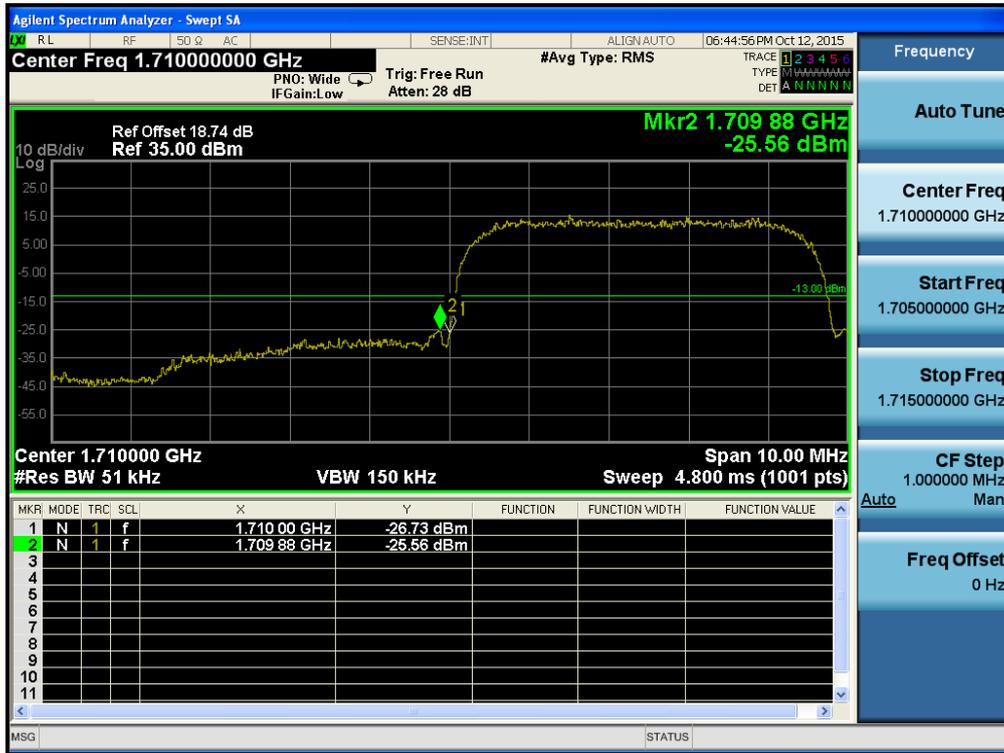


WCDMA1700 & Channel: 1312




WCDMA1700 & Channel: 1513

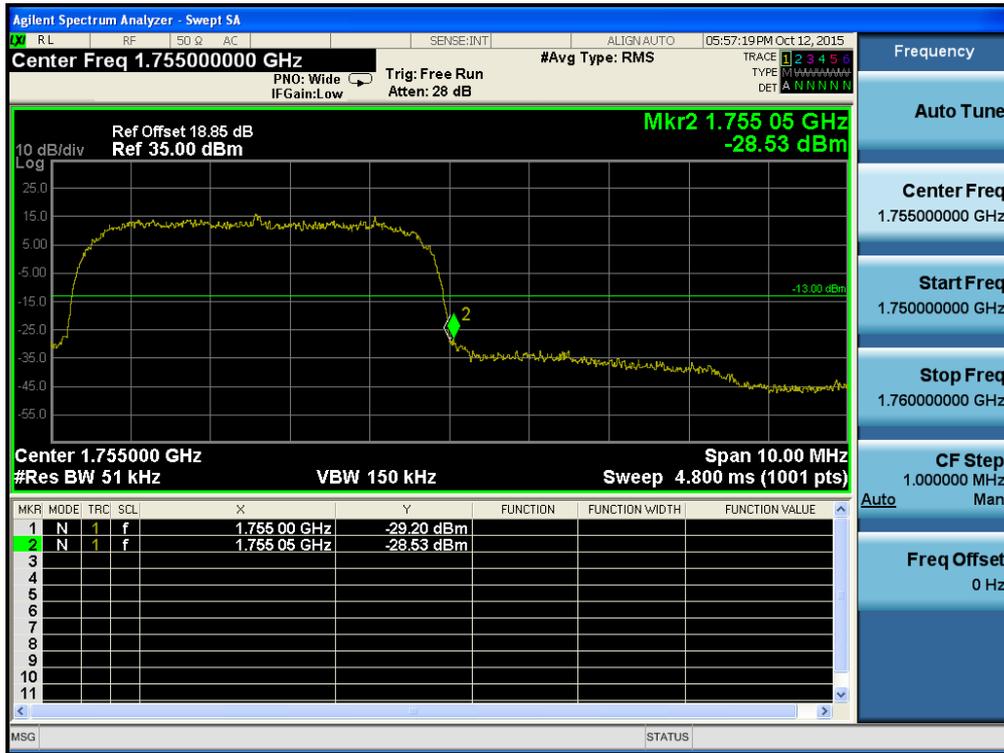


WCDMA1700 & Channel: 1513

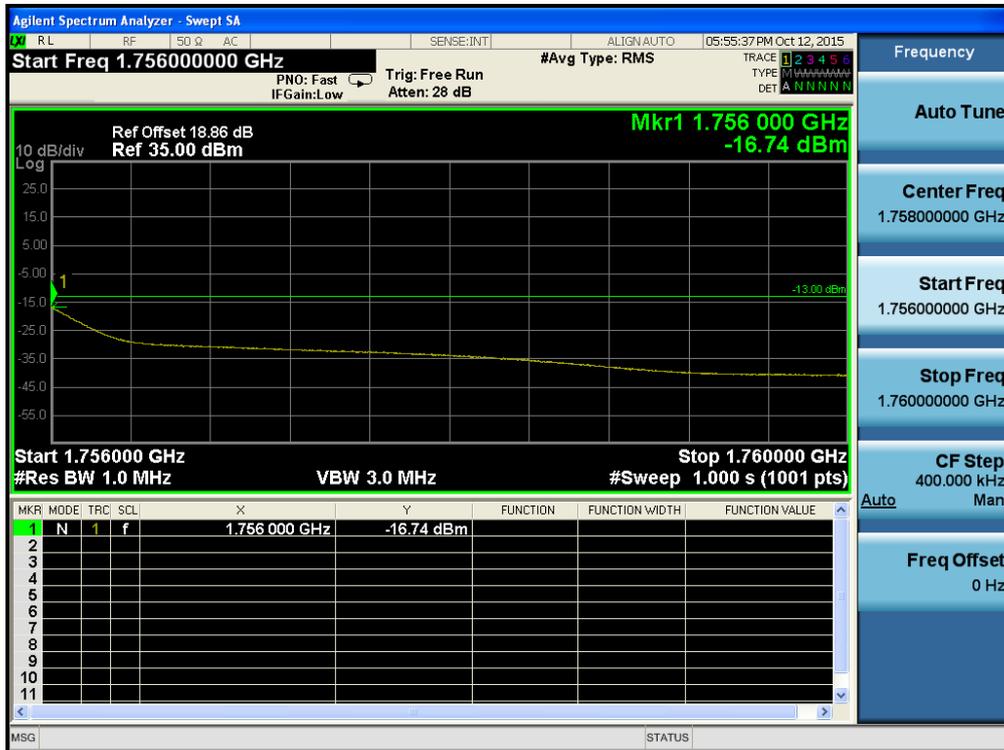


HSUPA1700 & Channel: 1312

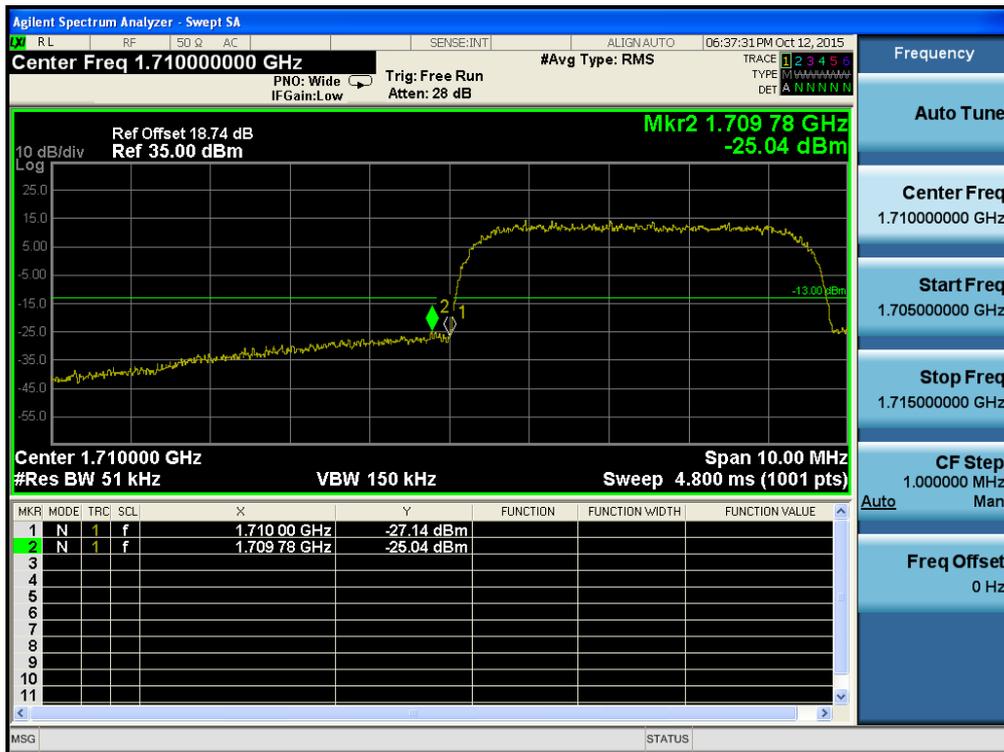


HSUPA1700 & Channel: 1312

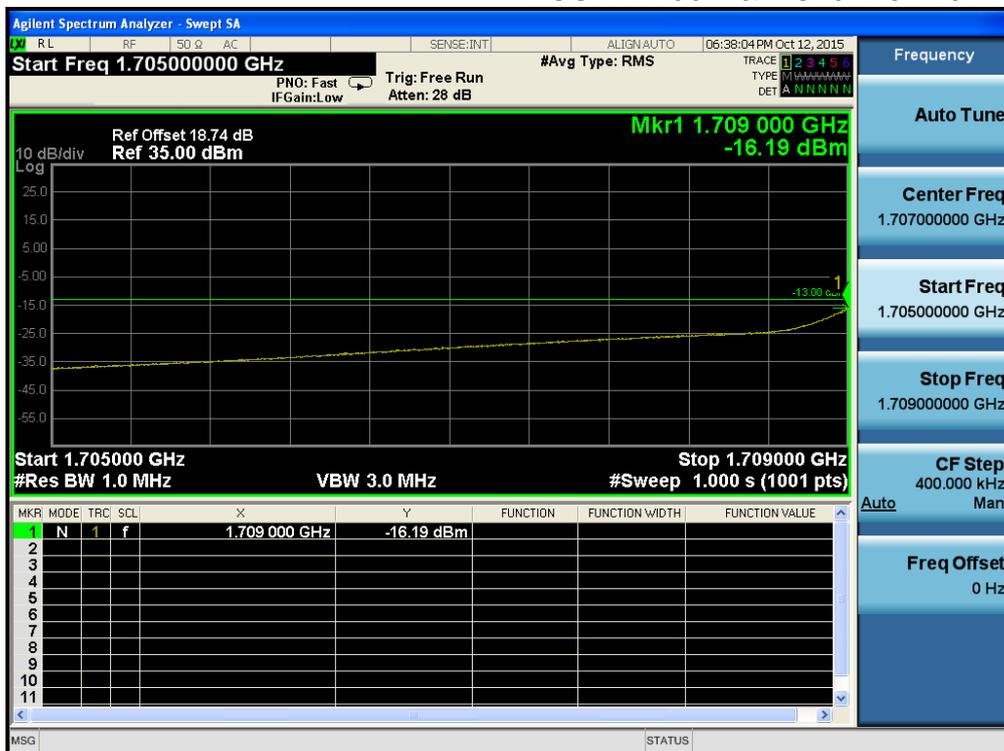


HSUPA1700 & Channel: 1513

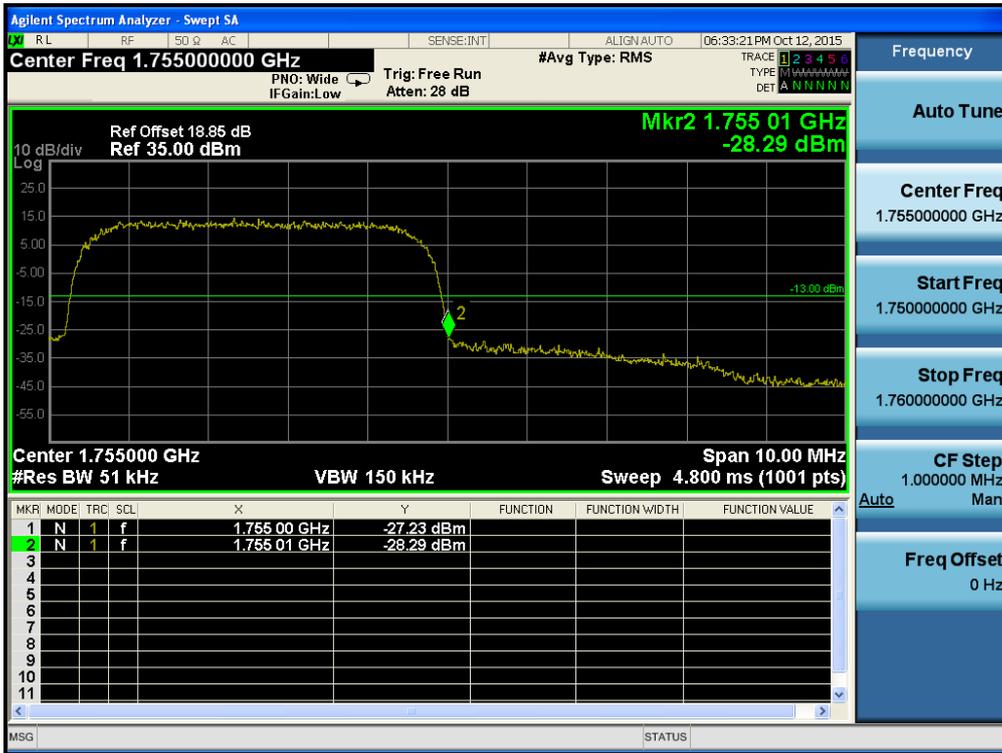


HSUPA1700 & Channel: 1513

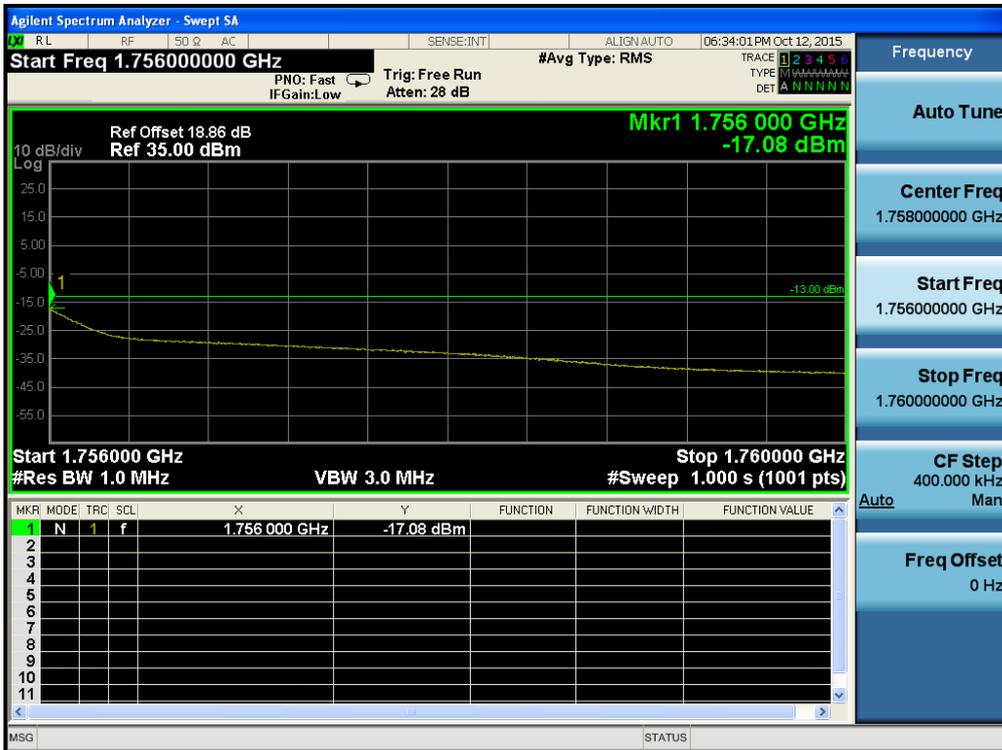

GSM1900 & Channel: 512

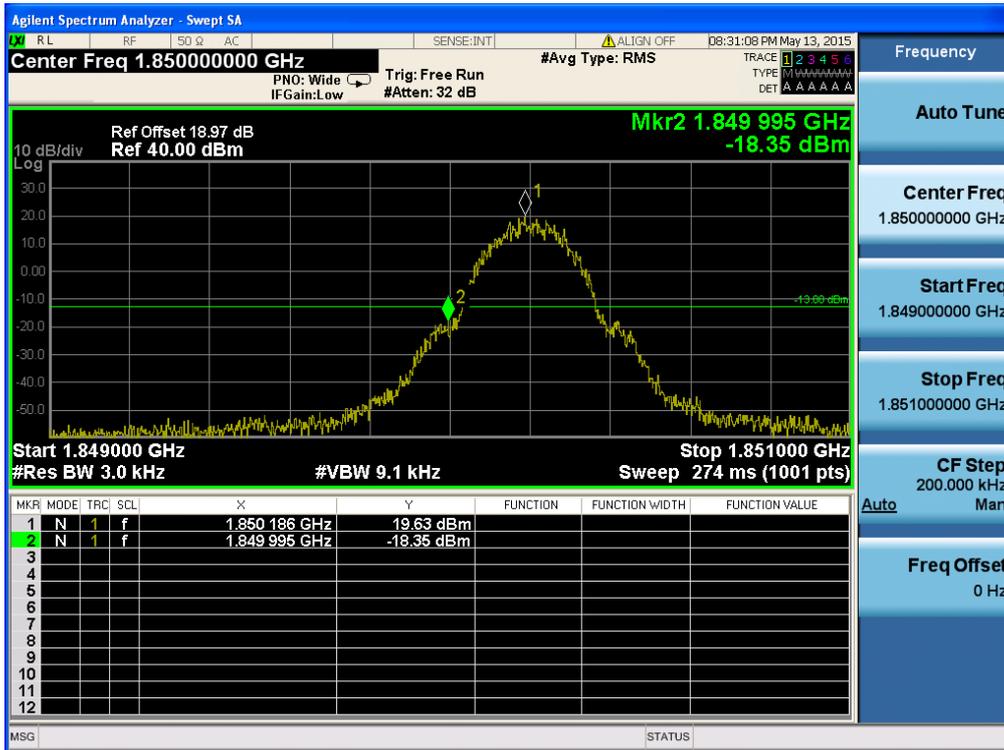


GSM1900 & Channel: 810

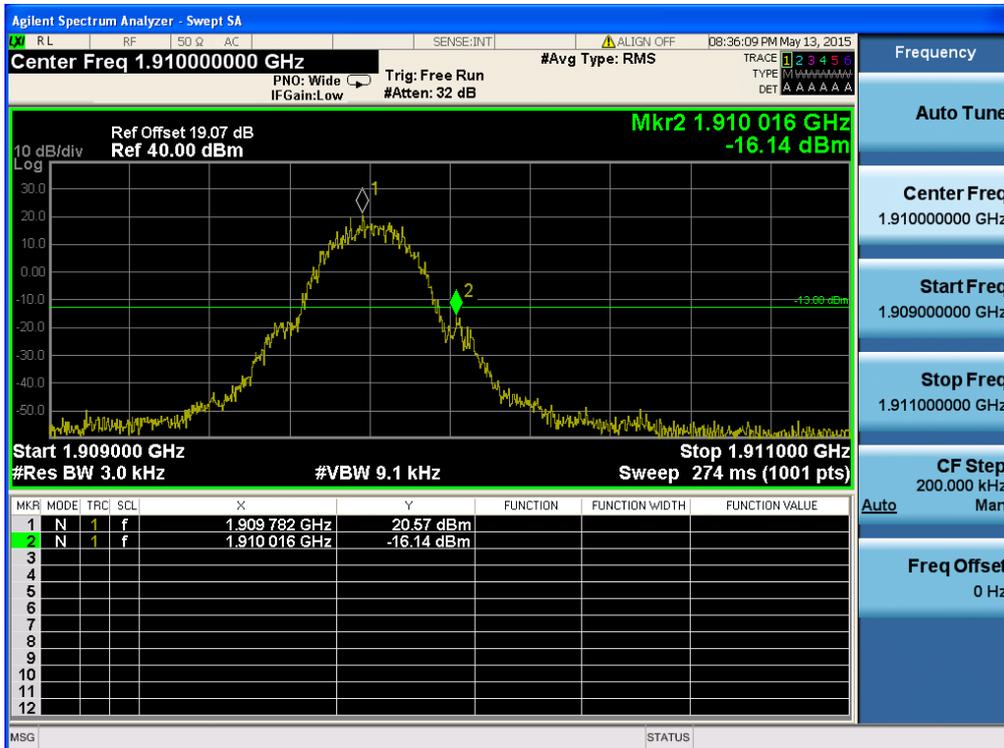


EDGE 1900 & Channel: 512



EDGE 1900 & Channel: 810

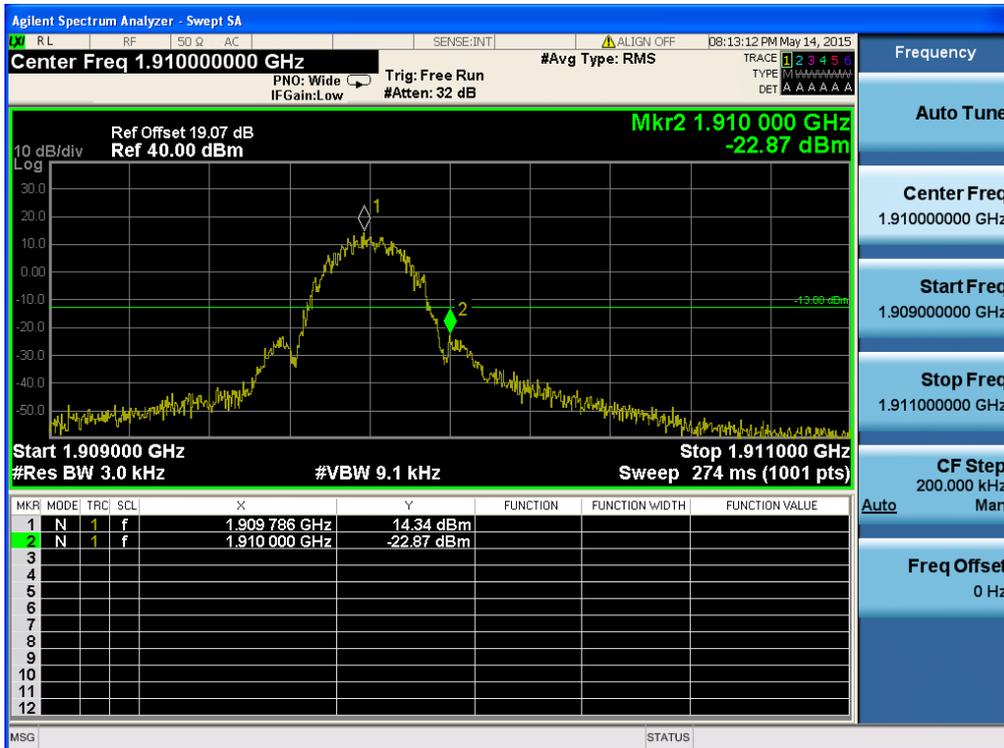

WCDMA1900 & Channel: 9262

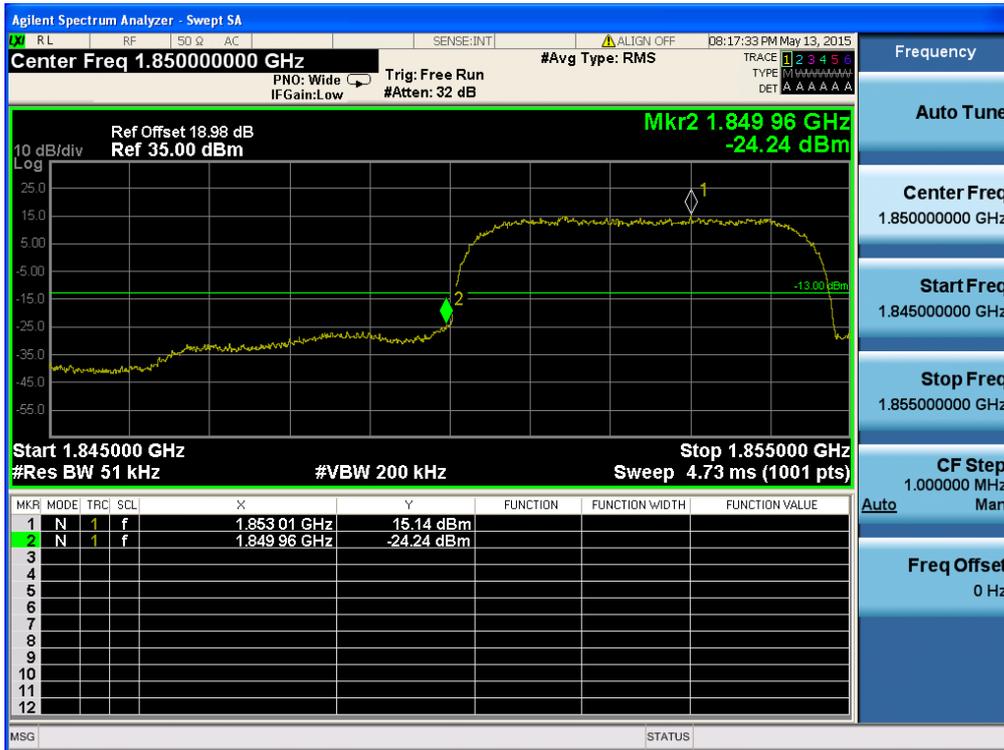


WCDMA1900 & Channel: 9262



WCDMA1900 & Channel: 9538




WCDMA1900 & Channel: 9538

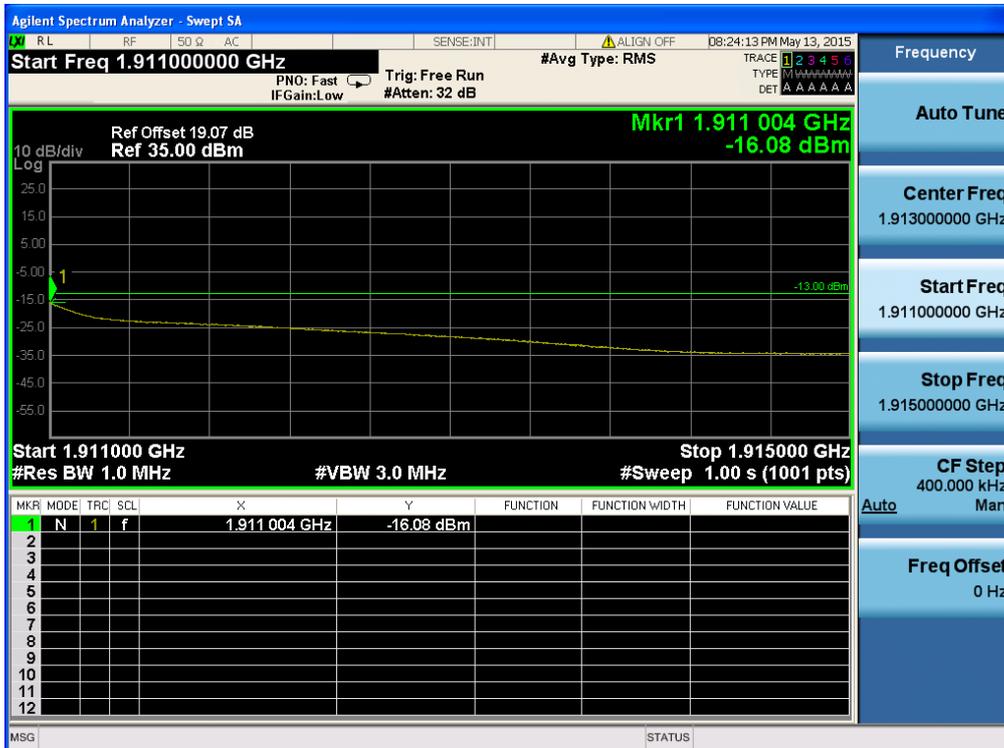

HSUPA1900 & Channel: 9262



HSUPA1900 & Channel: 9262

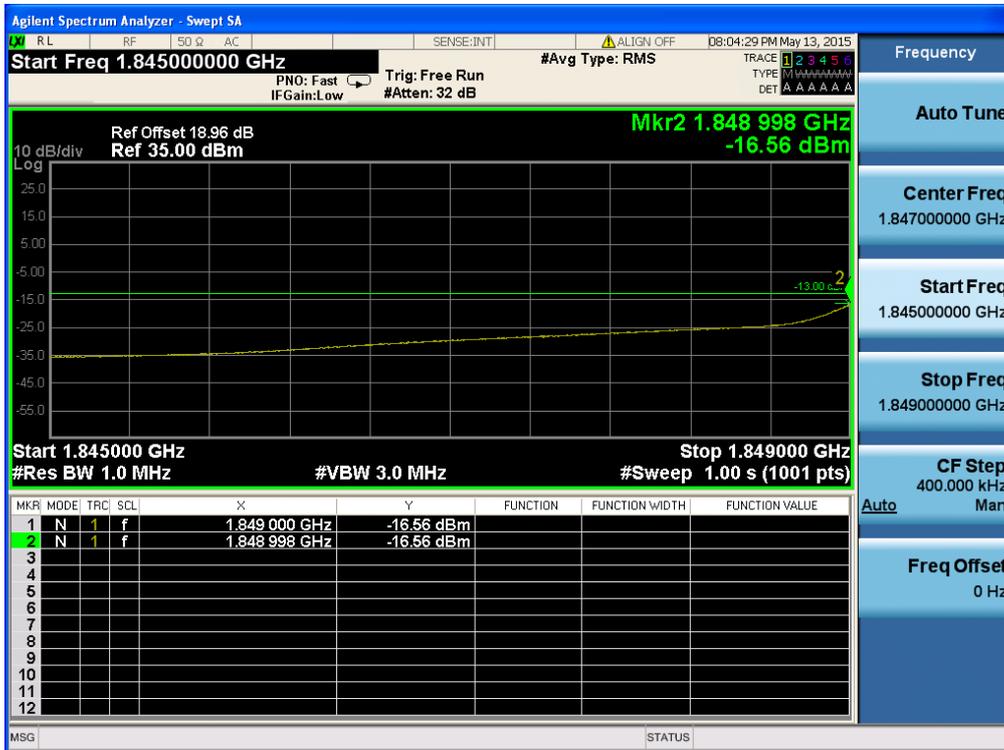

HSUPA1900 & Channel: 9538



HSUPA1900 & Channel: 9538

