

# FCC / IC\_LTE REPORT

## Certification

**Applicant Name:**  
 LG Electronics MobileComm U.S.A., Inc.

**Date of Issue:**  
 April 23, 2015

**Address:**  
 1000 Sylvan Avenue, Englewood Cliffs NJ 07632

**Test Site/Location:**  
 HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea

**Report No.:** HCT-R-1504-F009-1

**HCT FRN:** 0005866421

**IC Recognition No.:** 5944A-3

<b>FCC ID:</b>	<b>ZNFH815</b>
<b>IC:</b>	<b>2703C-H815</b>
<b>APPLICANT:</b>	<b>LG Electronics MobileComm U.S.A., Inc.</b>

**FCC/ IC Model(s):** LG-H815

**Additional FCC/ IC Model(s):** LGH815, H815, LG-H815P, LGH815P, H815P, LG-H815p, LGH815p, H815p, LG-H815L, LGH815L, H815L, LG-H815I, LGH815I, H815I, LG-H815AR, LGH815AR, H815AR, LG-H815ar, LGH815ar, H815ar, LG-H815K, LGH815K, H815K, LG-H815k, LGH815k, H815k

**EUT Type:** Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC

**FCC Classification:** Licensed Portable Transmitter Held to Ear (PCE)

**FCC Rule Part(s):** §2 , §27

**IC Rule:** RSS-Gen (Issue 4), RSS-139 (Issue 2)

### Standalone with normal cover

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	ERP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band17 (5)	706.5 – 713.5	4M50G7D	QPSK	0.110	20.40
		4M50W7D	16QAM	0.082	19.14
LTE – Band17 (10)	709.0 – 711.0	8M97G7D	QPSK	0.102	20.10
		8M95W7D	16QAM	0.077	18.88

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	ERP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band4 (1.4)	1710.7 – 1754.3	1M09G7D	QPSK	0.267	24.26
		1M09W7D	16QAM	0.212	23.26
LTE – Band4 (3)	1711.5 – 1753.5	2M70G7D	QPSK	0.241	23.82
		2M69W7D	16QAM	0.208	23.18
LTE – Band4 (5)	1712.5 – 1752.5	4M49G7D	QPSK	0.241	23.83
		4M49W7D	16QAM	0.205	23.12
LTE – Band4 (10)	1715.0 – 1750.0	9M00G7D	QPSK	0.256	24.09
		8M96W7D	16QAM	0.218	23.38
LTE – Band4 (15)	1717.5 – 1747.5	13M5G7D	QPSK	0.250	23.98
		13M5W7D	16QAM	0.215	23.32
LTE – Band4 (20)	1720.0 – 1745.0	18M0G7D	QPSK	0.242	23.83
		18M0W7D	16QAM	0.210	23.23

**Standalone with wireless charging cover (close)**

Mode (MHz)	Tx Frequency (MHz)	Modulation	ERP	
			Max. Power (W)	Max. Power (dBm)
LTE – Band17 (5)	706.5 – 713.5	QPSK	0.124	20.93
		16QAM	0.093	19.67
LTE – Band17 (10)	709.0 – 711.0	QPSK	0.116	20.65
		16QAM	0.092	19.62

Mode (MHz)	Tx Frequency (MHz)	Modulation	EIRP	
			Max. Power (W)	Max. Power (dBm)
LTE – Band4 (1.4)	1710.7 – 1754.3	QPSK	0.279	24.45
		16QAM	0.224	23.50
LTE – Band4 (3)	1711.5 – 1753.5	QPSK	0.256	24.08
		16QAM	0.220	23.42
LTE – Band4 (5)	1712.5 – 1752.5	QPSK	0.257	24.09
		16QAM	0.219	23.40
LTE – Band4 (10)	1715.0 – 1750.0	QPSK	0.271	24.34
		16QAM	0.227	23.57
LTE – Band4 (15)	1717.5 – 1747.5	QPSK	0.272	24.34
		16QAM	0.230	23.61
LTE – Band4 (20)	1720.0 – 1745.0	QPSK	0.246	23.90
		16QAM	0.222	23.46

**With wireless charging pad**

Mode (MHz)	Tx Frequency (MHz)	Modulation	ERP	
			Max. Power (W)	Max. Power (dBm)
LTE – Band17 (5)	706.5 – 713.5	QPSK	0.066	18.18
		16QAM	0.050	16.99
LTE – Band17 (10)	709.0 – 711.0	QPSK	0.061	17.84
		16QAM	0.047	16.76

Mode (MHz)	Tx Frequency (MHz)	Modulation	EIRP	
			Max. Power (W)	Max. Power (dBm)
LTE – Band4 (1.4)	1710.7 – 1754.3	QPSK	0.136	21.32
		16QAM	0.109	20.37
LTE – Band4 (3)	1711.5 – 1753.5	QPSK	0.127	21.05
		16QAM	0.109	20.36
LTE – Band4 (5)	1712.5 – 1752.5	QPSK	0.130	21.14
		16QAM	0.109	20.39
LTE – Band4 (10)	1715.0 – 1750.0	QPSK	0.138	21.39
		16QAM	0.119	20.75
LTE – Band4 (15)	1717.5 – 1747.5	QPSK	0.133	21.23
		16QAM	0.112	20.51
LTE – Band4 (20)	1720.0 – 1745.0	QPSK	0.127	21.04
		16QAM	0.114	20.55

The measurements shown in this report were made in accordance with the procedures specified in §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

**HCT CO., LTD.** Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)




**Report prepared by**  
: Ki Hyun Kim  
**Test engineer of RF Team**

**Approved by**  
: Sang Jun Lee  
**Manager of RF Team**

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1504-F009	April 16, 2015	- First Approval Report
HCT-R-1504-F009-1	April 23, 2015	- Add Model name - Revised the Test Mode for Radiated Emissions on Section 7.1 ~ 7.9

# Table of Contents

<b>1. GENERAL INFORMATION</b> .....	<b>6</b>
<b>2. INTRODUCTION</b> .....	<b>8</b>
2.1. EUT DESCRIPTION.....	8
2.2. MEASURING INSTRUMENT CALIBRATION .....	8
2.3. TEST FACILITY .....	8
<b>3. DESCRIPTION OF TESTS</b> .....	<b>9</b>
3.1 ERP/EIRP RADIATED POWER AND RADIATED SPURIOUS EMISSIONS.....	9
3.2 BLOCK B FREQUENCY RANGE (704 – 710 and 734 – 740 MHz, 777 – 792 MHz).....	10
3.3 AWS – MOBILE FREQUENCY BLOCKS (1710 – 1755 MHz).....	10
3.4 PEAK-AVERAGE RATIO. ....	11
3.5 OCCUPIED BANDWIDTH. ....	13
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	14
3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	15
<b>4. LIST OF TEST EQUIPMENT</b> .....	<b>16</b>
<b>5. SUMMARY OF TEST RESULTS</b> .....	<b>17</b>
<b>6. SAMPLE CALCULATION</b> .....	<b>18</b>
<b>7. TEST DATA</b> .....	<b>19</b>
7.1 EFFECTIVE RADIATED POWER OUTPUT (Band 17) _ Standalone with normal cover .....	19
7.2 EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT (Band 4) _ Standalone with normal cover.....	21
7.3 EFFECTIVE RADIATED POWER OUTPUT (Band 17) _ Standalone with wireless charging cover (close)	25
7.4 EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT (Band 4) _ Standalone with wireless charging cover (close).....	27
7.5 EFFECTIVE RADIATED POWER OUTPUT (Band 17) _ With wireless charging pad .....	31
7.6 EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT (Band 4) _ With wireless charging pad .....	33
7.7 RADIATED SPURIOUS EMISSIONS _ Standalone with normal cover .....	37
7.7.1 RADIATED SPURIOUS EMISSIONS (5 MHz Band 17 LTE).....	37
7.7.2 RADIATED SPURIOUS EMISSIONS (10 MHz Band 17 LTE).....	38
7.7.3 RADIATED SPURIOUS EMISSIONS (1.4 MHz Band 4 LTE).....	39
7.7.4 RADIATED SPURIOUS EMISSIONS (3 MHz Band 4 LTE).....	40
7.7.5 RADIATED SPURIOUS EMISSIONS (5 MHz Band 4 LTE).....	41
7.7.6 RADIATED SPURIOUS EMISSIONS (10 MHz Band 4 LTE).....	42
7.7.7 RADIATED SPURIOUS EMISSIONS (15 MHz Band 4 LTE).....	43
7.7.8 RADIATED SPURIOUS EMISSIONS (20 MHz Band 4 LTE).....	44
7.8 RADIATED SPURIOUS EMISSIONS _ Standalone with wireless charging cover (close).....	45
7.8.1 RADIATED SPURIOUS EMISSIONS (5 MHz Band 17 LTE).....	45
7.8.2 RADIATED SPURIOUS EMISSIONS (10 MHz Band 17 LTE).....	46

---

7.8.3 RADIATED SPURIOUS EMISSIONS (1.4 MHz Band 4 LTE).....	47
7.8.4 RADIATED SPURIOUS EMISSIONS (3 MHz Band 4 LTE).....	48
7.8.5 RADIATED SPURIOUS EMISSIONS (5 MHz Band 4 LTE).....	49
7.8.6 RADIATED SPURIOUS EMISSIONS (10 MHz Band 4 LTE).....	50
7.8.7 RADIATED SPURIOUS EMISSIONS (15 MHz Band 4 LTE).....	51
7.8.8 RADIATED SPURIOUS EMISSIONS (20 MHz Band 4 LTE).....	52
7.9 RADIATED SPURIOUS EMISSIONS _ With wireless charging pad.....	53
7.9.1 RADIATED SPURIOUS EMISSIONS (5 MHz Band 17 LTE).....	53
7.9.2 RADIATED SPURIOUS EMISSIONS (10 MHz Band 17 LTE).....	54
7.9.3 RADIATED SPURIOUS EMISSIONS (1.4 MHz Band 4 LTE).....	55
7.9.4 RADIATED SPURIOUS EMISSIONS (3 MHz Band 4 LTE).....	56
7.9.5 RADIATED SPURIOUS EMISSIONS (5 MHz Band 4 LTE).....	57
7.9.6 RADIATED SPURIOUS EMISSIONS (10 MHz Band 4 LTE).....	58
7.9.7 RADIATED SPURIOUS EMISSIONS (15 MHz Band 4 LTE).....	59
7.9.8 RADIATED SPURIOUS EMISSIONS (20 MHz Band 4 LTE).....	60
7.10 PEAK-TO-AVERAGE RATIO .....	61
7.11 OCCUPIED BANDWIDTH .....	62
7.12 CONDUCTED SPURIOUS EMISSIONS.....	63
7.12.1 BAND EDGE.....	64
7.13 RECEIVER SPURIOUS EMISSIONS_ Standalone with normal cover.....	65
7.14 RECEIVER SPURIOUS EMISSIONS_ Standalone with wireless charging cover (close).....	65
7.15 RECEIVER SPURIOUS EMISSIONS_ With wireless charging pad .....	67
7.16 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	68
7.16.1 FREQUENCY STABILITY (5 MHz Band 17 LTE).....	68
7.16.2 FREQUENCY STABILITY (10 MHz Band 17 LTE).....	69
7.16.3 FREQUENCY STABILITY (1.4 MHz Band 4 LTE).....	70
7.16.4 FREQUENCY STABILITY (3 MHz Band 4 LTE).....	71
7.16.5 FREQUENCY STABILITY (5 MHz Band 4 LTE).....	72
7.16.6 FREQUENCY STABILITY (10 MHz Band 4 LTE).....	73
7.16.7 FREQUENCY STABILITY (15 MHz Band 4 LTE).....	74
7.16.8 FREQUENCY STABILITY (20 MHz Band 4 LTE).....	75
8. TEST PLOTS.....	76

# MEASUREMENT REPORT

## 1. GENERAL INFORMATION

**Applicant Name:** LG Electronics MobileComm U.S.A., Inc.  
**Address:** 1000 Sylvan Avenue, Englewood Cliffs NJ 07632  
**FCC ID:** ZNFH815  
**IC:** 2703C-H815  
**Application Type:** Certification  
**FCC Classification:** Licensed Portable Transmitter Held to Ear (PCE)  
**FCC Rule Part(s):** §2 , §27  
**EUT Type:** Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC  
**FCC/ IC Model(s):** LG-H815  
**Additional FCC/ IC Model(s):** LGH815, H815, LG-H815P, LGH815P, H815P, LG-H815p, LGH815p, H815p, LG-H815L, LGH815L, H815L, LG-H815I, LGH815I, H815I, LG-H815AR, LGH815AR, H815AR, LG-H815ar, LGH815ar, H815ar, LG-H815K, LGH815K, H815K, LG-H815k, LGH815k, H815k

**Tx Frequency:** 706.5 MHz – 713.5 MHz (LTE – Band 17 (5 MHz))  
709.0 MHz – 711.0 MHz (LTE – Band 17 (10 MHz))  
  
1710.7 MHz – 1754.3 MHz (LTE – Band 4 (1.4 MHz))  
1711.5 MHz – 1753.5 MHz (LTE – Band 4 (3 MHz))  
1712.5 MHz – 1752.5 MHz (LTE – Band 4 (5 MHz))  
1715.0 MHz – 1750.0 MHz (LTE – Band 4 (10 MHz))  
1717.5 MHz – 1747.5 MHz (LTE – Band 4 (15 MHz))  
1720.0 MHz – 1745.0 MHz (LTE – Band 4 (20 MHz))

**Max. RF Output Power:**

	Standalone	with normal cover:	
Band 17 ( 5 MHz) :		0.110 W (QPSK) (20.40 dBm)	
		0.082 W (16-QAM) (19.14 dBm)	
Band 17 (10 MHz) :		0.102 W (QPSK) (20.10 dBm)	
		0.077 W (16-QAM) (18.88 dBm)	
Band 4 (1.4 MHz):		0.267 W (QPSK) (24.26 dBm)	
		0.212 W (16-QAM) (23.26 dBm)	
Band 4 (3 MHz):		0.241 W (QPSK) (23.82 dBm)	
		0.208 W (16-QAM) (23.18 dBm)	
Band 4 (5 MHz):		0.241 W (QPSK) (23.83 dBm)	
		0.205 W (16-QAM) (23.12 dBm)	
Band 4 (10 MHz):		0.256 W (QPSK) (24.09 dBm)	
		0.218 W (16-QAM) (23.38 dBm)	
Band 4 (15 MHz):		0.250 W (QPSK) (23.98 dBm)	
		0.215 W (16-QAM) (23.32 dBm)	
Band 4 (20 MHz):		0.242 W (QPSK) (23.83 dBm)	
		0.210 W (16-QAM) (23.23 dBm)	

**Standalone with wireless**

<b>charging cover (close) :</b>	0.124 W (QPSK) (20.93 dBm)
Band 17 ( 5 MHz) :	0.093 W (16-QAM) (19.67 dBm)
	0.116 W (QPSK) (20.65 dBm)
Band 17 (10 MHz) :	0.092 W (16-QAM) (19.62 dBm)
Band 4 (1.4 MHz):	0.279 W (QPSK) (24.45 dBm)
	0.224 W (16-QAM) (23.50 dBm)
Band 4 (3 MHz):	0.256 W (QPSK) (24.08 dBm)
	0.220 W (16-QAM) (23.42 dBm)
Band 4 (5 MHz):	0.257 W (QPSK) (24.09 dBm)
	0.219 W (16-QAM) (23.40 dBm)
Band 4 (10 MHz):	0.271 W (QPSK) (24.34 dBm)
	0.227 W (16-QAM) (23.57 dBm)
Band 4 (15 MHz):	0.272 W (QPSK) (24.34 dBm)
	0.230 W (16-QAM) (23.61 dBm)
Band 4 (20 MHz):	0.246 W (QPSK) (23.90 dBm)
	0.222 W (16-QAM) (23.46 dBm)

**With wireless charging pad:**

Band 17 ( 5 MHz) :	0.066 W (QPSK) (18.18 dBm)
	0.050 W (16-QAM) (16.99 dBm)
Band 17 (10 MHz) :	0.061 W (QPSK) (17.84 dBm)
	0.047 W (16-QAM) (16.76 dBm)
Band 4 (1.4 MHz):	0.136 W (QPSK) (21.32 dBm)
	0.109 W (16-QAM) (20.37 dBm)
Band 4 (3 MHz):	0.127 W (QPSK) (21.05 dBm)
	0.109 W (16-QAM) (20.36 dBm)
Band 4 (5 MHz):	0.130 W (QPSK) (21.14 dBm)
	0.109 W (16-QAM) (20.39 dBm)
Band 4 (10 MHz):	0.138 W (QPSK) (21.39 dBm)
	0.119 W (16-QAM) (20.75 dBm)
Band 4 (15 MHz):	0.133 W (QPSK) (21.23 dBm)
	0.112 W (16-QAM) (20.51 dBm)
Band 4 (20 MHz):	0.127 W (QPSK) (21.04 dBm)
	0.114 W (16-QAM) (20.55 dBm)

<b>Emission Designator(s):</b>	Band 17 ( 5 MHz) :	4M50G7D (QPSK) / 4M50W7D (16-QAM)
	Band 17 (10 MHz) :	8M97G7D (QPSK) / 8M95W7D (16-QAM)
	Band 4 (1.4 MHz):	1M09G7D (QPSK) / 1M09W7D (16-QAM)
	Band 4 (3 MHz):	2M70G7D (QPSK) / 2M69W7D (16-QAM)
	Band 4 (5 MHz):	4M49G7D (QPSK) / 4M49W7D (16-QAM)
	Band 4 (10 MHz):	9M00G7D (QPSK) / 8M96W7D (16-QAM)
	Band 4 (15 MHz):	13M5G7D (QPSK) / 13M5W7D (16-QAM)
	Band 4 (20 MHz):	18M0G7D (QPSK) / 18M0W7D (16-QAM)

**Date(s) of Tests:** March 21, 2015 ~ April 14, 2015

**Antenna Specification**  
 Manufacturer: Ace Technology  
 Antenna type: PIFA Antenna (Planar Inverted F)  
 Peak Gain: Band 17: -6.86 dBi  
 Peak Gain: Band 4: -3.64 dBi

## **2. INTRODUCTION**

### **2.1. EUT DESCRIPTION**

The LG Electronics MobileComm U.S.A., Inc. LG-H815 Cellular/PCS GSM/GPRS/EDGE/WCDMA/HSDPA/HSUPA/LTE Phone with Bluetooth, WLAN, NFC consists of LTE 4 and 17.

### **2.2. MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### **2.3. TEST FACILITY**

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, Korea.**

### **3. DESCRIPTION OF TESTS**

#### **3.1 ERP/EIRP RADIATED POWER AND RADIATED SPURIOUS EMISSIONS**

Note: ERP(Effective Radiated Power), EIRP(Effective Isotropic Radiated Power)

##### Test Procedure

Radiated emission measurements are performed in the Fully-anechoic chamber. The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-C-2004 Clause 2.2.17. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission. The level and position of the maximized emission is recorded with the spectrum analyzer using a RMS detector.

A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(dBm)} = P_{g(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dB)}$$

Where:  $P_d$  is the dipole equivalent power and  $P_g$  is the generator output power into the substitution antenna.

The maximum EIRP is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

##### **Radiated spurious emissions**

: Frequency Range : 30 MHz ~ 10<sup>th</sup> Harmonics of highest channel fundamental frequency.

### 3.2 BLOCK B FREQUENCY RANGE (704 – 710 and 734 – 740 MHz, 777 – 792 MHz)

§27.5(c)

698-746 MHz Band. The following frequencies are available for licensing pursuant to this part in the 698–746 MHz band: (1) Three paired channel blocks of 12 MHz each are available for assignment as follows :

Block A : 698 – 704 MHz and 728 – 734 MHz ;


Block B : 704 – 710 MHz and 734 – 740 MHz ; and

Block C : 710 – 716 MHz and 740 – 746 MHz.

The EUT is only being authorized for operation in Blocks B and C.

### 3.3 AWS – MOBILE FREQUENCY BLOCKS (1710 – 1755 MHz)

§27.5(h)

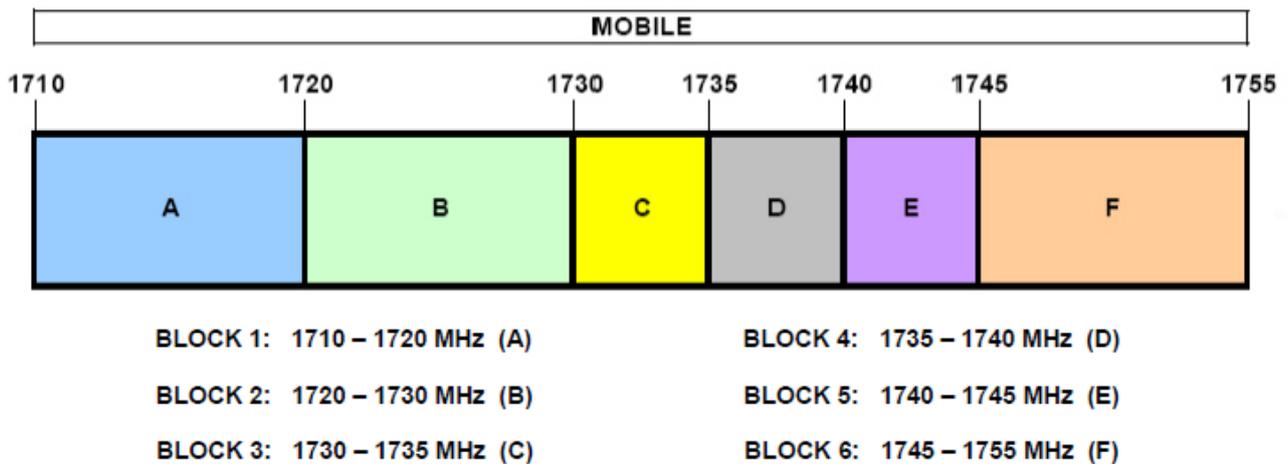

### 3.4 PEAK-AVERAGE RATIO.

#### Test Procedure

Peak to Average Power Ratio is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r02, October 17, 2014, Section 5.7.

#### - Section 5.7.1 CCDF Procedure

- a) Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
- b) Set the number of counts to a value that stabilizes the measured CCDF curve;
- c) Set the measurement interval as follows:
  - 1) for continuous transmissions, set to 1 ms,
  - 2) for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
- d) Record the maximum PAPR level associated with a probability of 0.1%.

#### - Section 5.7.2 Alternate Procedure

Use one of the procedures presented in 5.1 to measure the total peak power and record as  $P_{Pk}$ . Use one of the applicable procedures presented 5.2 to measure the total average power and record as  $P_{Avg}$ . Determine the P.A.R. from:  $P.A.R._{(dB)} = P_{Pk (dBm)} - P_{Avg (dBm)}$  ( $P_{Avg}$  = Average Power + Duty cycle Factor)

#### 5.1.1 Peak power measurements with a spectrum/signal analyzer or EMI receiver

The following procedure can be used to determine the total peak output power.

- a) Set the RBW  $\geq$  OBW.
- b) Set VBW  $\geq 3 \times$  RBW.
- c) Set span  $\geq 2 \times$  RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Ensure that the number of measurement points  $\geq$  span/RBW.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the peak amplitude level.

## **5.2.2 Procedures for use with a spectrum/signal analyzer when EUT cannot be configured to transmit continuously and sweep triggering/signal gating cannot be properly implemented**

If the EUT cannot be configured to transmit continuously (burst duty cycle < 98%), then one of the following procedures can be used. The selection of the applicable procedure will depend on the characteristics of the measured burst duty cycle.

Measure the burst duty cycle with a spectrum/signal analyzer or EMC receiver can be used in zero-span mode if the response time and spacing between bins on the sweep are sufficient to permit accurate measurement of the burst on/off time of the transmitted signal.

### **5.2.2.2 Constant burst duty cycle**


If the measured burst duty cycle is constant (i.e., duty cycle variations are less than  $\pm 2$  percent), then:

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW  $\geq 3 \times$  RBW.
- d) Number of points in sweep  $\geq 2 \times$  span / RBW. (This gives bin-to-bin spacing  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (power averaging).
- g) Set sweep trigger to "free run".
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
- j) Add  $10 \log (1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission).

For example, add  $10 \log (1/0.25) = 6$  dB if the duty cycle is a constant 25%.

### 3.5 OCCUPIED BANDWIDTH.

#### Test set-up

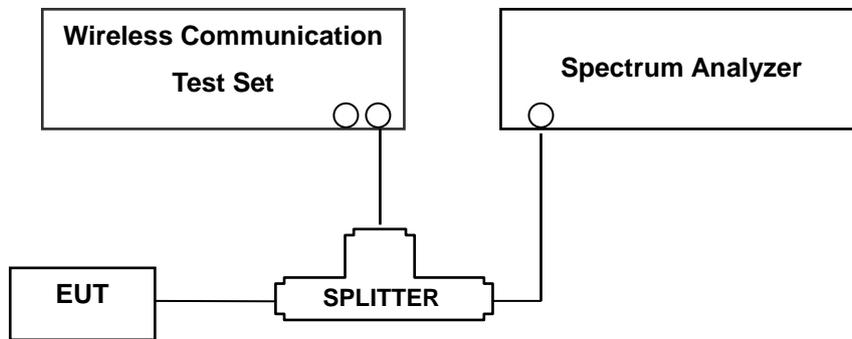

(Configuration of conducted Emission measurement)

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

#### Test Procedure

OBW is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r02, October 17, 2014, Section 4.2.

The EUT makes a call to the communication simulator. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels(low, middle and high operational range.)

The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

### 3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.

#### Test Procedure

Spurious and harmonic emissions at antenna terminal is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r02, October 17, 2014, Section 6.0.

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer.


The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz bandwidth may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency

**NOTES:** The analyzer plot offsets were determined by below conditions.

- For LTE Band 17, total offset 26.7 dB = 20 dB attenuator + 6 dB Divider + 0.7 dB RF cables.
- For LTE Band 4, total offset 27.3 dB = 20 dB attenuator + 6 dB Divider + 1.3 dB RF cables.

### 3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

#### Test Set-up

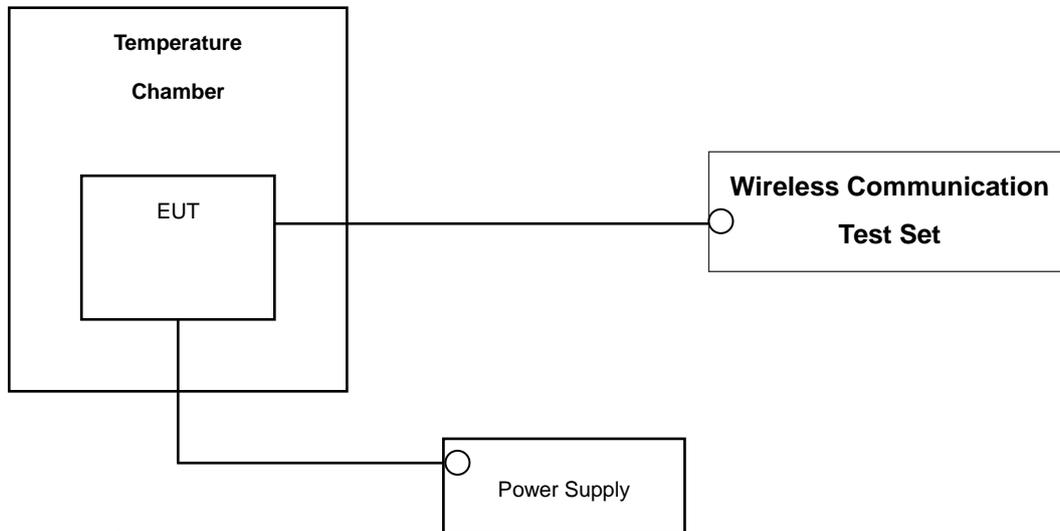

\* Nominal Operating Voltage

#### Test Procedure

Frequency stability is tested in accordance with ANSI/TIA-603-C-2004 section 2.2.2

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from the end point to 100 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification — the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block

#### Time Period and Procedure:

The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).

1. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
2. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

**NOTE: The EUT is tested down to the battery endpoint.**

## 4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Interval	Calibration Due
LG innotek CHINA	WCD-110/WCP	LF1NA625283010191(1.1)		
Agilent	N1921A/ Power Sensor	MY45241059	Annual	07/09/2015
Agilent	N1911A/ Power Meter	MY45100523	Annual	01/15/2016
MITEQ	AMF-6D-001180-35-20P/AMP	1081666	Annual	09/04/2015
Wainwright	WHK1.2/15G-10EF/H.P.F	4	Annual	06/17/2015
Wainwright	WRCJV2400/2483.5-2370/2520-60/12SS / B.R.F.	1	Annual	06/17/2015
Wainwright	WHK3.3/18G-10EF/H.P.F	2	Annual	06/17/2015
Hewlett Packard	11667B / Power Splitter	10545	Annual	02/22/2016
Hewlett Packard	11667B / Power Splitter	11275	Annual	05/19/2015
Digital	EP-3010/ Power Supply	3110117	Annual	10/29/2015
Schwarzbeck	UHAP/ Dipole Antenna	557	Biennial	03/23/2017
Schwarzbeck	UHAP/ Dipole Antenna	558	Biennial	03/23/2017
Korea Engineering	KR-1005L / Chamber	KRAC05063-3CH	Annual	10/29/2015
Schwarzbeck	BBHA 9120D/ Horn Antenna	147	Biennial	09/01/2016
Schwarzbeck	BBHA 9120D/ Horn Antenna	1151	Biennial	10/05/2015
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170541	Biennial	07/05/2015
Agilent	E4440A/Spectrum Analyzer	US45303008	Annual	03/18/2016
WEINSCHL	ATTENUATOR	BR0592	Annual	10/22/2015
REOHDE&SCHWARZ	FSV40/Spectrum Analyzer	1307.9002K40-100931-NK	Annual	06/09/2015
Agilent	8960 (E5515C)/ Base Station	MY48360222	Annual	08/26/2015
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6200863156	Annual	03/24/2016

## 5. SUMMARY OF TEST RESULTS

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result
2.1049	RSS-Gen(6.6) RSS-139(2.3)	Occupied Bandwidth	N/A	CONDUCTED	PASS
2.1051, 27.53(g), 27.53(h)	RSS-139(6.5.1)	Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	< 43 +10 log <sub>10</sub> (P[Watts]) at Band Edge and for all-of-band emissions		PASS
27.50(d)(5)	RSS-139(6.4) RSS-130(4.4)	Peak-Average Ratio	< 13 dB		PASS
* 2.1046	RSS-139(6.4)	Conducted Output Power	N/A		PASS
2.1055, 27.54	RSS-139(6.3)	Frequency stability / variation of ambient temperature	Emission must remain in band		PASS
27.50(c)(10)	RSS-130(4.4) SRSP-503(5.1.2)	Effective Radiated Power (Band 17)	< 3 Watts max. ERP < 5 Watts max. ERP		RADIATED
27.50(d)(4)	RSS-139(6.4)	Equivalent Isotropic Radiated Power (Band 4)	< 1 Watts max. EIRP	PASS	
2.1053, 27.53(g), 27.53(h)	RSS-139(6.5.1)	Undesirable Out-of-Band Emissions	< 43 +10 log <sub>10</sub> (P[Watts]) for all out-of-band emissions	PASS	
	RSS-Gen,7	Receiver Spurious Emissions	Cf.)Section 7.13~7.15	PASS	

\*: See SAR Report

## 6. SAMPLE CALCULATION

### A. EIRP Sample Calculation

Mode	Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
	channel	Freq.(MHz)						W	dBm
LTE Band4	20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

**EIRP = SubstituteLEVEL(dBm) + Ant. Gain – CL(Cable Loss)**

- 1) The EUT mounted on a wooden tripod is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated and the antenna height is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power (EIRP).

## B. Emission Designator

### QPSK Modulation

**Emission Designator = 4M48G7D**

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

### 16QAM Modulation

**Emission Designator = 4M48W7D**

LTE BW = 4.48 MHz

W = main carrier modulated in a combination of two

or more of the following modes;

amplitude, angle, pulse

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

## 7. TEST DATA

### 7.1 EFFECTIVE RADIATED POWER OUTPUT (Band 17) \_ Standalone with normal cover

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	ERP	
								W	dBm
706.5	5 MHz	QPSK	-31.38	29.63	-9.45	0.81	V	0.086	19.37
		16-QAM	-32.52	28.49	-9.45	0.81	V	0.066	18.23
710.0		QPSK	-30.59	30.48	-9.47	0.82	V	0.104	20.19
		16-QAM	-31.77	29.30	-9.47	0.82	V	0.080	19.01
713.5		QPSK	-30.43	30.71	-9.49	0.82	V	0.110	20.40
		16-QAM	-31.69	29.45	-9.49	0.82	V	0.082	19.14

**Effective Radiated Power Data (5 MHz Band 17 LTE)**

Note: All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	ERP	
								W	dBm
709.0	10 MHz	QPSK	-30.75	30.30	-9.47	0.81	V	0.100	20.02
		16-QAM	-32.03	29.02	-9.47	0.81	V	0.075	18.74
710.0		QPSK	-30.68	30.39	-9.47	0.82	V	0.102	20.10
		16-QAM	-31.90	29.17	-9.47	0.82	V	0.077	18.88
711.0		QPSK	-30.49	30.38	-9.48	0.82	V	0.102	20.08
		16-QAM	-31.70	29.17	-9.48	0.82	V	0.077	18.87

**Effective Radiated Power Data (10 MHz Band 17 LTE)**

Note: All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case

**NOTES:**Effective Radiated Power Output Measurements by Substitution Methodaccording to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is y plane in LTE mode. Also worst case of detecting Antenna is vertical polarization in LTE mode.

We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

**7.2 EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT (Band 4) \_ Standalone with normal cover**

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1710.7	1.4 MHz	QPSK	-17.07	15.41	9.88	1.31	H	0.250	23.98
		16-QAM	-17.98	14.50	9.88	1.31	H	0.203	23.07
1732.5		QPSK	-16.86	15.62	9.96	1.32	H	0.267	24.26
		16-QAM	-17.86	14.62	9.96	1.32	H	0.212	23.26
1754.3		QPSK	-17.10	15.35	10.01	1.33	H	0.253	24.03
		16-QAM	-18.09	14.36	10.01	1.33	H	0.201	23.04

**Equivalent Isotropic Radiated Power Data (1.4 MHz Band 4 LTE)**

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1711.5	3 MHz	QPSK	-17.23	15.25	9.88	1.31	H	0.241	23.82
		16-QAM	-17.95	14.53	9.88	1.31	H	0.204	23.10
1732.5		QPSK	-17.30	15.18	9.95	1.32	H	0.240	23.81
		16-QAM	-17.93	14.55	9.95	1.32	H	0.208	23.18
1753.5		QPSK	-17.49	14.95	10.01	1.33	H	0.231	23.63
		16-QAM	-18.17	14.27	10.01	1.33	H	0.197	22.95

**Equivalent Isotropic Radiated Power Data (3 MHz Band 4 LTE)**

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1712.5	5 MHz	QPSK	-17.26	15.22	9.88	1.31	H	0.239	23.79
		16-QAM	-18.02	14.46	9.88	1.31	H	0.201	23.03
1732.5		QPSK	-17.27	15.20	9.95	1.32	H	0.241	23.83
		16-QAM	-17.98	14.49	9.95	1.32	H	0.205	23.12
1752.5		QPSK	-17.38	15.05	10.01	1.33	H	0.236	23.73
		16-QAM	-18.09	14.34	10.01	1.33	H	0.201	23.02

**Equivalent Isotropic Radiated Power Data (5 MHz Band 4 LTE)**

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1715.0	10 MHz	QPSK	-17.09	15.39	9.88	1.31	H	0.249	23.96
		16-QAM	-17.85	14.63	9.88	1.31	H	0.209	23.20
1732.5		QPSK	-17.00	15.47	9.94	1.32	H	0.256	24.09
		16-QAM	-17.71	14.76	9.94	1.32	H	0.218	23.38
1750.0		QPSK	-17.21	15.29	10.00	1.33	H	0.249	23.96
		16-QAM	-17.98	14.52	10.00	1.33	H	0.208	23.19

**Equivalent Isotropic Radiated Power Data (10 MHz Band 4 LTE)**

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1717.5	15 MHz	QPSK	-17.13	15.35	9.88	1.31	H	0.247	23.92
		16-QAM	-17.94	14.54	9.88	1.31	H	0.205	23.11
1732.5		QPSK	-17.10	15.37	9.93	1.32	H	0.250	23.98
		16-QAM	-17.90	14.57	9.93	1.32	H	0.208	23.18
1747.5		QPSK	-17.32	15.24	9.98	1.32	H	0.246	23.90
		16-QAM	-17.90	14.66	9.98	1.32	H	0.215	23.32

**Equivalent Isotropic Radiated Power Data (15 MHz Band 4 LTE)**

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1720.0	20 MHz	QPSK	-17.36	15.12	9.88	1.31	H	0.234	23.69
		16-QAM	-17.91	14.57	9.88	1.31	H	0.206	23.14
1732.5		QPSK	-17.24	15.22	9.92	1.31	H	0.242	23.83
		16-QAM	-17.89	14.57	9.92	1.31	H	0.208	23.18
1745.0		QPSK	-17.35	15.18	9.97	1.32	H	0.241	23.83
		16-QAM	-17.95	14.58	9.97	1.32	H	0.210	23.23

**Equivalent Isotropic Radiated Power Data (20 MHz Band 4 LTE)**

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

**NOTES:**Equivalent Isotropic Radiated Power Measurements by Substitution Methodaccording to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer.

A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is x plane in LTE mode. Also worst case of detecting Antenna is horizontal polarization in LTE mode.

We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

### 7.3 EFFECTIVE RADIATED POWER OUTPUT (Band 17) \_ Standalone with wireless charging cover (close)

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	ERP	
								W	dBm
706.5	5 MHz	QPSK	-30.73	30.28	-9.45	0.81	V	0.100	20.02
		16-QAM	-31.87	29.14	-9.45	0.81	V	0.077	18.88
710.0		QPSK	-29.99	31.08	-9.47	0.82	V	0.120	20.79
		16-QAM	-31.19	29.88	-9.47	0.82	V	0.091	19.59
713.5		QPSK	-29.90	31.24	-9.49	0.82	V	0.124	20.93
		16-QAM	-31.16	29.98	-9.49	0.82	V	0.093	19.67

**Effective Radiated Power Data (5 MHz Band 17 LTE)**

Note: All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	ERP	
								W	dBm
709.0	10 MHz	QPSK	-30.15	30.90	-9.47	0.81	V	0.115	20.62
		16-QAM	-31.42	29.63	-9.47	0.81	V	0.086	19.35
710.0		QPSK	-30.13	30.94	-9.47	0.82	V	0.116	20.65
		16-QAM	-31.16	29.91	-9.47	0.82	V	0.092	19.62
711.0		QPSK	-30.01	30.86	-9.48	0.82	V	0.114	20.56
		16-QAM	-31.23	29.64	-9.48	0.82	V	0.086	19.34

**Effective Radiated Power Data (10 MHz Band 17 LTE)**

Note: All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case

**NOTES:**Effective Radiated Power Output Measurements by Substitution Methodaccording to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is y plane in LTE mode. Also worst case of detecting Antenna is vertical polarization in LTE mode.

We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

**7.4 EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT (Band 4) \_ Standalone with wireless charging cover (close)**

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1710.7	1.4 MHz	QPSK	-17.23	15.25	9.88	1.31	H	0.241	23.82
		16-QAM	-18.21	14.27	9.88	1.31	H	0.192	22.84
1732.5		QPSK	-16.67	15.81	9.96	1.32	H	0.279	24.45
		16-QAM	-17.62	14.86	9.96	1.32	H	0.224	23.50
1754.3		QPSK	-16.80	15.65	10.01	1.33	H	0.271	24.33
		16-QAM	-17.72	14.73	10.01	1.33	H	0.219	23.41

**Equivalent Isotropic Radiated Power Data (1.4 MHz Band 4 LTE)**

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1711.5	3 MHz	QPSK	-17.45	15.03	9.88	1.31	H	0.229	23.60
		16-QAM	-18.18	14.30	9.88	1.31	H	0.194	22.87
1732.5		QPSK	-17.03	15.45	9.95	1.32	H	0.256	24.08
		16-QAM	-17.69	14.79	9.95	1.32	H	0.220	23.42
1753.5		QPSK	-17.14	15.30	10.01	1.33	H	0.250	23.98
		16-QAM	-17.76	14.68	10.01	1.33	H	0.217	23.36

**Equivalent Isotropic Radiated Power Data (3 MHz Band 4 LTE)**

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1712.5	5 MHz	QPSK	-17.48	15.00	9.88	1.31	H	0.228	23.57
		16-QAM	-18.24	14.24	9.88	1.31	H	0.191	22.81
1732.5		QPSK	-17.03	15.44	9.95	1.32	H	0.255	24.07
		16-QAM	-17.75	14.72	9.95	1.32	H	0.216	23.35
1752.5		QPSK	-17.02	15.41	10.01	1.33	H	0.257	24.09
		16-QAM	-17.71	14.72	10.01	1.33	H	0.219	23.40

**Equivalent Isotropic Radiated Power Data (5 MHz Band 4 LTE)**

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1715.0	10 MHz	QPSK	-17.32	15.16	9.88	1.31	H	0.236	23.73
		16-QAM	-18.06	14.42	9.88	1.31	H	0.199	22.99
1732.5		QPSK	-16.79	15.68	9.94	1.32	H	0.269	24.30
		16-QAM	-17.52	14.95	9.94	1.32	H	0.227	23.57
1750.0		QPSK	-16.83	15.67	10.00	1.33	H	0.271	24.34
		16-QAM	-17.60	14.90	10.00	1.33	H	0.227	23.57

**Equivalent Isotropic Radiated Power Data (10 MHz Band 4 LTE)**

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1717.5	15 MHz	QPSK	-17.49	14.99	9.88	1.31	H	0.227	23.56
		16-QAM	-18.17	14.31	9.88	1.31	H	0.194	22.88
1732.5		QPSK	-17.02	15.45	9.93	1.32	H	0.255	24.06
		16-QAM	-17.70	14.77	9.93	1.32	H	0.218	23.38
1747.5		QPSK	-16.88	15.68	9.98	1.32	H	0.272	24.34
		16-QAM	-17.61	14.95	9.98	1.32	H	0.230	23.61

**Equivalent Isotropic Radiated Power Data (15 MHz Band 4 LTE)**

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1720.0	20 MHz	QPSK	-17.62	14.86	9.88	1.31	H	0.220	23.43
		16-QAM	-18.15	14.33	9.88	1.31	H	0.195	22.90
1732.5		QPSK	-17.17	15.29	9.92	1.31	H	0.246	23.90
		16-QAM	-17.78	14.68	9.92	1.31	H	0.213	23.29
1745.0		QPSK	-17.31	15.22	9.97	1.32	H	0.244	23.87
		16-QAM	-17.72	14.81	9.97	1.32	H	0.222	23.46

**Equivalent Isotropic Radiated Power Data (20 MHz Band 4 LTE)**

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

**NOTES:**Equivalent Isotropic Radiated Power Measurements by Substitution Methodaccording to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer.

A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is x plane in LTE mode. Also worst case of detecting Antenna is horizontal polarization in LTE mode.

We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

**7.5 EFFECTIVE RADIATED POWER OUTPUT (Band 17) \_ With wireless charging pad**

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	ERP	
								W	dBm
706.5	5 MHz	QPSK	-33.58	27.43	-9.45	0.81	V	0.052	17.17
		16-QAM	-34.73	26.28	-9.45	0.81	V	0.040	16.02
710.0		QPSK	-32.85	28.22	-9.47	0.82	V	0.062	17.93
		16-QAM	-34.08	26.99	-9.47	0.82	V	0.047	16.70
713.5		QPSK	-32.65	28.49	-9.49	0.82	V	0.066	18.18
		16-QAM	-33.84	27.30	-9.49	0.82	V	0.050	16.99

**Effective Radiated Power Data (5 MHz Band 17 LTE)**

Note: All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	ERP	
								W	dBm
709.0	10 MHz	QPSK	-32.99	28.06	-9.47	0.81	V	0.060	17.78
		16-QAM	-34.14	26.91	-9.47	0.81	V	0.046	16.63
710.0		QPSK	-32.94	28.13	-9.47	0.82	V	0.061	17.84
		16-QAM	-34.02	27.05	-9.47	0.82	V	0.047	16.76
711.0		QPSK	-32.86	28.01	-9.48	0.82	V	0.059	17.71
		16-QAM	-33.89	26.98	-9.48	0.82	V	0.047	16.68

**Effective Radiated Power Data (10 MHz Band 17 LTE)**

Note: All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case

**NOTES:**Effective Radiated Power Output Measurements by Substitution Methodaccording to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer.

A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is y plane in LTE mode. Also worst case of detecting Antenna is vertical polarization in LTE mode.

We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

### 7.6 EQUIVALENT ISOTROPIC RADIATED POWER OUTPUT (Band 4) \_ With wireless charging pad

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1710.7	1.4 MHz	QPSK	-20.06	12.42	9.88	1.31	V	0.126	20.99
		16-QAM	-21.00	11.48	9.88	1.31	V	0.101	20.05
1732.5		QPSK	-19.80	12.68	9.96	1.32	V	0.136	21.32
		16-QAM	-20.75	11.73	9.96	1.32	V	0.109	20.37
1754.3		QPSK	-20.56	11.89	10.01	1.33	V	0.114	20.57
		16-QAM	-21.42	11.03	10.01	1.33	V	0.093	19.71

**Equivalent Isotropic Radiated Power Data (1.4 MHz Band 4 LTE)**

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1711.5	3 MHz	QPSK	-20.27	12.21	9.88	1.31	V	0.120	20.78
		16-QAM	-20.94	11.54	9.88	1.31	V	0.103	20.11
1732.5		QPSK	-20.06	12.42	9.95	1.32	V	0.127	21.05
		16-QAM	-20.75	11.73	9.95	1.32	V	0.109	20.36
1753.5		QPSK	-20.81	11.63	10.01	1.33	V	0.107	20.31
		16-QAM	-21.39	11.05	10.01	1.33	V	0.094	19.73

**Equivalent Isotropic Radiated Power Data (3 MHz Band 4 LTE)**

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1712.5	5 MHz	QPSK	-20.16	12.32	9.88	1.31	V	0.123	20.89
		16-QAM	-20.98	11.50	9.88	1.31	V	0.102	20.07
1732.5		QPSK	-19.96	12.51	9.95	1.32	V	0.130	21.14
		16-QAM	-20.71	11.76	9.95	1.32	V	0.109	20.39
1752.5		QPSK	-20.68	11.75	10.01	1.33	V	0.111	20.43
		16-QAM	-21.39	11.04	10.01	1.33	V	0.094	19.72

**Equivalent Isotropic Radiated Power Data (5 MHz Band 4 LTE)**

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1715.0	10 MHz	QPSK	-20.05	12.43	9.88	1.31	V	0.126	21.00
		16-QAM	-20.85	11.63	9.88	1.31	V	0.105	20.20
1732.5		QPSK	-19.70	12.77	9.94	1.32	V	0.138	21.39
		16-QAM	-20.34	12.13	9.94	1.32	V	0.119	20.75
1750.0		QPSK	-20.20	12.30	10.00	1.33	V	0.125	20.97
		16-QAM	-20.96	11.54	10.00	1.33	V	0.105	20.21

**Equivalent Isotropic Radiated Power Data (10 MHz Band 4 LTE)**

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1717.5	15 MHz	QPSK	-20.08	12.40	9.88	1.31	V	0.125	20.97
		16-QAM	-20.90	11.58	9.88	1.31	V	0.104	20.15
1732.5		QPSK	-19.85	12.62	9.93	1.32	V	0.133	21.23
		16-QAM	-20.57	11.90	9.93	1.32	V	0.112	20.51
1747.5		QPSK	-20.25	12.31	9.98	1.32	V	0.125	20.97
		16-QAM	-20.96	11.60	9.98	1.32	V	0.106	20.26

**Equivalent Isotropic Radiated Power Data (15 MHz Band 4 LTE)**

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1720.0	20 MHz	QPSK	-20.38	12.10	9.88	1.31	V	0.117	20.67
		16-QAM	-20.87	11.61	9.88	1.31	V	0.104	20.18
1732.5		QPSK	-20.03	12.43	9.92	1.31	V	0.127	21.04
		16-QAM	-20.52	11.94	9.92	1.31	V	0.114	20.55
1745.0		QPSK	-20.31	12.22	9.97	1.32	V	0.122	20.87
		16-QAM	-20.74	11.79	9.97	1.32	V	0.111	20.44

**Equivalent Isotropic Radiated Power Data (20 MHz Band 4 LTE)**

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

**NOTES:**Equivalent Isotropic Radiated Power Measurements by Substitution Methodaccording to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer.

A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is y plane in LTE mode. Also worst case of detecting Antenna is vertical polarization in LTE mode.

We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

## 7.7 RADIATED SPURIOUS EMISSIONS \_ Standalone with normal cover

### 7.7.1 RADIATED SPURIOUS EMISSIONS (5 MHz Band 17 LTE)

▣ OPERATING FREQUENCY :	<u>713.5 MHz</u>
▣ MEASURED OUTPUT POWER:	<u>20.40 dBm = 0.110 W</u>
▣ MODULATION SIGNAL:	<u>5 MHz QPSK</u>
▣ DISTANCE:	<u>3 meters</u>
▣ LIMIT: $43 + 10 \log_{10}(W) =$	<u>33.40 dBc</u>

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	ERP (dBm)	dBc
23755 (706.50)	1,413.00	-54.32	7.82	-60.10	1.18	H	-53.46	73.86
	2,119.50	-55.86	9.55	-61.05	1.46	H	-52.96	73.36
	2,826.00	-56.89	10.84	-60.88	1.71	H	-51.75	72.15
23790 (710.00)	1,420.00	-53.38	7.86	-59.09	1.19	H	-52.42	72.82
	2,130.00	-55.99	9.49	-60.43	1.45	H	-52.39	72.79
	2,840.00	-57.40	10.90	-61.30	1.72	V	-52.12	72.52
23825 (713.50)	1,427.00	-53.36	7.90	-58.95	1.19	H	-52.24	72.64
	2,140.50	-55.83	9.42	-60.31	1.46	H	-52.35	72.75
	2,854.00	-57.17	10.95	-61.25	1.69	H	-51.99	72.39

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case
  5. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

### 7.7.2 RADIATED SPURIOUS EMISSIONS (10 MHz Band 17 LTE)

- ▣ OPERATING FREQUENCY : 710.0 MHz
- ▣ MEASURED OUTPUT POWER: 20.10 dBm = 0.102 W
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  33.10 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	ERP (dBm)	dBc
23780 (709.00)	1,418.00	-53.73	7.85	-59.46	1.19	H	-52.80	72.90
	2,127.00	-53.80	9.51	-58.47	1.45	H	-50.41	70.51
	2,836.00	-56.88	10.88	-60.78	1.71	H	-51.61	71.71
23790 (710.00)	1,420.00	-52.50	7.86	-58.21	1.19	H	-51.54	71.64
	2,130.00	-56.09	9.49	-60.53	1.45	V	-52.49	72.59
	2,840.00	-57.81	10.90	-61.71	1.72	H	-52.53	72.63
23800 (711.00)	1,422.00	-52.78	7.87	-58.45	1.19	H	-51.77	71.87
	2,133.00	-54.90	9.47	-59.36	1.45	H	-51.34	71.44
	2,844.00	-57.59	10.92	-61.55	1.71	V	-52.34	72.44

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case
  5. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

### 7.7.3 RADIATED SPURIOUS EMISSIONS (1.4 MHz Band 4 LTE)

- ▣ OPERATING FREQUENCY : 1732.50 MHz
- ▣ MEASURED OUTPUT POWER: 24.26 dBm = 0.267 W
- ▣ MODULATION SIGNAL: 1.4 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  37.26 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
19957 (1710.7)	3,421.40	-49.09	12.36	-54.17	1.94	H	-43.75	68.01
	5,132.10	-44.65	12.34	-42.73	2.37	H	-32.76	57.02
	6,842.80	-57.06	12.17	-50.56	2.81	H	-41.20	65.46
20175 (1732.5)	3,465.00	-50.68	12.27	-55.24	1.87	H	-44.84	69.10
	5,197.50	-47.08	12.63	-45.53	2.45	H	-35.35	59.61
	6,930.00	-55.86	11.87	-48.26	2.84	H	-39.23	63.49
20393 (1754.3)	3,508.60	-51.06	12.15	-55.18	2.00	H	-45.03	69.29
	5,262.90	-50.33	12.91	-49.53	2.41	V	-39.03	63.29
	7,017.20	-57.00	11.57	-49.38	2.90	V	-40.71	64.97

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
  5. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

### 7.7.4 RADIATED SPURIOUS EMISSIONS (3 MHz Band 4 LTE)

▣ OPERATING FREQUENCY :	<u>1711.50 MHz</u>
▣ MEASURED OUTPUT POWER:	<u>23.82 dBm = 0.241 W</u>
▣ MODULATION SIGNAL:	<u>3 MHz QPSK</u>
▣ DISTANCE:	<u>3 meters</u>
▣ LIMIT: $43 + 10 \log_{10}(W) =$	<u>36.82 dBc</u>

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
19965 (1711.5)	3,423.00	-48.57	12.35	-53.67	1.94	H	-43.26	67.08
	5,134.50	-45.44	12.35	-43.45	2.37	H	-33.47	57.29
	6,846.00	-57.01	12.16	-50.52	2.80	V	-41.16	64.98
20175 (1732.5)	3,465.00	-50.15	12.27	-54.71	1.87	H	-44.31	68.13
	5,197.50	-49.49	12.63	-47.94	2.45	H	-37.76	61.58
	6,930.00	-56.90	11.87	-49.30	2.84	V	-40.27	64.09
20385 (1753.5)	3,507.00	-51.75	12.15	-55.87	1.99	H	-45.71	69.53
	5,260.50	-50.68	12.90	-49.85	2.42	H	-39.37	63.19
	7,014.00	-57.20	11.59	-49.73	2.91	V	-41.05	64.87

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
  5. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

### 7.7.5 RADIATED SPURIOUS EMISSIONS (5 MHz Band 4 LTE)

- ▣ OPERATING FREQUENCY : 1732.50 MHz
- ▣ MEASURED OUTPUT POWER: 23.83 dBm = 0.241 W
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  36.83 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
19975 (1712.5)	3,425.00	-49.11	12.35	-54.25	1.95	H	-43.85	67.68
	5,137.50	-42.71	12.36	-40.63	2.38	H	-30.65	54.48
	6,850.00	-56.61	12.15	-50.13	2.80	V	-40.78	64.61
20175 (1732.5)	3,465.00	-51.09	12.27	-55.65	1.87	H	-45.25	69.08
	5,197.50	-47.34	12.63	-45.79	2.45	H	-35.61	59.44
	6,930.00	-56.41	11.87	-48.81	2.84	V	-39.78	63.61
20375 (1752.5)	3,505.00	-51.64	12.15	-55.77	1.98	H	-45.60	69.43
	5,257.50	-48.10	12.89	-47.27	2.41	H	-36.79	60.62
	7,010.00	-56.25	11.61	-48.97	2.91	H	-40.27	64.10

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
  5. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

### 7.7.6 RADIATED SPURIOUS EMISSIONS (10 MHz Band 4 LTE)

- ▣ OPERATING FREQUENCY : 1732.50 MHz
- ▣ MEASURED OUTPUT POWER: 24.09 dBm = 0.256 W
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  37.09 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20000 (1715.0)	3,430.00	-49.45	12.34	-54.68	1.95	H	-44.29	68.38
	5,145.00	-42.42	12.38	-40.38	2.39	H	-30.39	54.48
	6,860.00	-57.47	12.11	-51.03	2.81	H	-41.73	65.82
20175 (1732.5)	3,465.00	-51.11	12.27	-55.67	1.87	H	-45.27	69.36
	5,197.50	-45.86	12.63	-44.31	2.45	H	-34.13	58.22
	6,930.00	-56.73	11.87	-49.13	2.84	V	-40.10	64.19
20350 (1750.0)	3,500.00	-51.91	12.15	-56.06	1.95	H	-45.86	69.95
	5,250.00	-48.35	12.87	-47.51	2.39	H	-37.03	61.12
	7,000.00	-57.06	11.65	-50.39	2.85	V	-41.59	65.68

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
  5. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

### 7.7.7 RADIATED SPURIOUS EMISSIONS (15 MHz Band 4 LTE)

- ▣ OPERATING FREQUENCY : 1732.50 MHz
- ▣ MEASURED OUTPUT POWER: 23.98 dBm = 0.250 W
- ▣ MODULATION SIGNAL: 15 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  36.98 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20025 (1717.5)	3,435.00	-49.99	12.34	-54.97	1.92	H	-44.55	68.53
	5,152.50	-44.28	12.40	-42.39	2.39	H	-32.38	56.36
	6,870.00	-57.71	12.08	-51.45	2.79	H	-42.16	66.14
20175 (1732.5)	3,465.00	-50.44	12.27	-55.00	1.87	H	-44.60	68.58
	5,197.50	-47.63	12.63	-46.08	2.45	H	-35.90	59.88
	6,930.00	-57.44	11.87	-49.84	2.84	V	-40.81	64.79
20325 (1747.5)	3,495.00	-51.77	12.17	-56.04	1.93	H	-45.80	69.78
	5,242.50	-47.83	12.83	-46.84	2.41	H	-36.42	60.40
	6,990.00	-57.24	11.68	-49.33	2.80	V	-40.45	64.43

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
  5. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

### 7.7.8 RADIATED SPURIOUS EMISSIONS (20 MHz Band 4 LTE)

▣ OPERATING FREQUENCY :	<u>1732.50 MHz</u>
▣ MEASURED OUTPUT POWER:	<u>23.83 dBm = 0.242 W</u>
▣ MODULATION SIGNAL:	<u>20 MHz QPSK</u>
▣ DISTANCE:	<u>3 meters</u>
▣ LIMIT: $43 + 10 \log_{10}(W) =$	<u>36.83 dBc</u>

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20050 (1720.0)	3,440.00	-49.70	12.33	-54.41	1.89	H	-43.97	67.80
	5,160.00	-45.25	12.44	-43.46	2.40	H	-33.42	57.25
	6,880.00	-57.17	12.04	-50.46	2.78	H	-41.20	65.03
20175 (1732.5)	3,465.00	-48.31	12.27	-52.87	1.87	H	-42.47	66.30
	5,197.50	-47.26	12.63	-45.71	2.45	H	-35.53	59.36
	6,930.00	-56.17	11.87	-48.57	2.84	H	-39.54	63.37
20300 (1745.0)	3,490.00	-52.08	12.18	-56.48	1.90	H	-46.20	70.03
	5,235.00	-50.88	12.80	-49.69	2.42	H	-39.31	63.14
	6,980.00	-55.72	11.71	-47.56	2.79	H	-38.64	62.47

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
  5. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

## 7.8 RADIATED SPURIOUS EMISSIONS \_ Standalone with wireless charging cover (close)

### 7.8.1 RADIATED SPURIOUS EMISSIONS (5 MHz Band 17 LTE)

- ▣ OPERATING FREQUENCY : 713.5 MHz
- ▣ MEASURED OUTPUT POWER: 20.93 dBm = 0.124 W
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  33.93 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	ERP (dBm)	dBc
23755 (706.50)	1,413.00	-54.52	7.82	-60.30	1.18	H	-53.66	74.59
	2,119.50	-50.37	9.55	-55.56	1.46	H	-47.47	68.40
	2,826.00	-56.10	10.84	-60.09	1.71	H	-50.96	71.89
23790 (710.00)	1,420.00	-54.20	7.86	-59.91	1.19	H	-53.24	74.17
	2,130.00	-52.60	9.49	-57.04	1.45	H	-49.00	69.93
	2,840.00	-56.73	10.90	-60.63	1.72	H	-51.45	72.38
23825 (713.50)	1,427.00	-53.17	7.90	-58.76	1.19	V	-52.05	72.98
	2,140.50	-50.15	9.42	-54.63	1.46	H	-46.67	67.60
	2,854.00	-57.44	10.95	-61.52	1.69	H	-52.26	73.19

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case
  5. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

### 7.8.2 RADIATED SPURIOUS EMISSIONS (10 MHz Band 17 LTE)

- ▣ OPERATING FREQUENCY : 710.0 MHz
- ▣ MEASURED OUTPUT POWER: 20.65 dBm = 0.116 W
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  33.65 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	ERP (dBm)	dBc
23780 (709.00)	1,418.00	-53.80	7.85	-59.53	1.19	H	-52.87	73.52
	2,127.00	-50.92	9.51	-55.59	1.45	H	-47.53	68.18
	2,836.00	-57.23	10.88	-61.13	1.71	V	-51.96	72.61
23790 (710.00)	1,420.00	-53.66	7.86	-59.37	1.19	H	-52.70	73.35
	2,130.00	-54.06	9.49	-58.50	1.45	H	-50.46	71.11
	2,840.00	-56.55	10.90	-60.45	1.72	H	-51.27	71.92
23800 (711.00)	1,422.00	-53.82	7.87	-59.49	1.19	V	-52.81	73.46
	2,133.00	-52.06	9.47	-56.52	1.45	H	-48.50	69.15
	2,844.00	-56.31	10.92	-60.27	1.71	H	-51.06	71.71

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case
  5. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

### 7.8.3 RADIATED SPURIOUS EMISSIONS (1.4 MHz Band 4 LTE)

- ▣ OPERATING FREQUENCY : 1732.50 MHz
- ▣ MEASURED OUTPUT POWER: 24.45 dBm = 0.279 W
- ▣ MODULATION SIGNAL: 1.4 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  37.45 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
19957 (1710.7)	3,421.40	-48.82	12.36	-53.90	1.94	H	-43.48	67.93
	5,132.10	-41.76	12.34	-39.84	2.37	H	-29.87	54.32
	6,842.80	-55.73	12.17	-49.23	2.81	H	-39.87	64.32
20175 (1732.5)	3,465.00	-50.62	12.27	-55.18	1.87	H	-44.78	69.23
	5,197.50	-43.27	12.63	-41.72	2.45	H	-31.54	55.99
	6,930.00	-56.72	11.87	-49.12	2.84	V	-40.09	64.54
20393 (1754.3)	3,508.60	-50.69	12.15	-54.81	2.00	H	-44.66	69.11
	5,262.90	-45.97	12.91	-45.17	2.41	H	-34.67	59.12
	7,017.20	-56.48	11.57	-48.86	2.90	H	-40.19	64.64

**NOTES:** 1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

2. We are performed all frequency to 10<sup>th</sup> harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

5. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

### 7.8.4 RADIATED SPURIOUS EMISSIONS (3 MHz Band 4 LTE)

- ▣ OPERATING FREQUENCY : 1732.50 MHz
- ▣ MEASURED OUTPUT POWER: 24.08 dBm = 0.256 W
- ▣ MODULATION SIGNAL: 3 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  37.08 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
19965 (1711.5)	3,423.00	-48.10	12.35	-53.20	1.94	H	-42.79	66.87
	5,134.50	-41.58	12.35	-39.59	2.37	H	-29.61	53.69
	6,846.00	-55.29	12.16	-48.80	2.80	V	-39.44	63.52
20175 (1732.5)	3,465.00	-50.96	12.27	-55.52	1.87	H	-45.12	69.20
	5,197.50	-43.85	12.63	-42.30	2.45	H	-32.12	56.20
	6,930.00	-56.71	11.87	-49.11	2.84	V	-40.08	64.16
20385 (1753.5)	3,507.00	-51.48	12.15	-55.60	1.99	H	-45.44	69.52
	5,260.50	-45.72	12.90	-44.89	2.42	H	-34.41	58.49
	7,014.00	-56.68	11.59	-49.21	2.91	H	-40.53	64.61

**NOTES:** 1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

2. We are performed all frequency to 10<sup>th</sup> harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

5. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

### 7.8.5 RADIATED SPURIOUS EMISSIONS (5 MHz Band 4 LTE)

- ▣ OPERATING FREQUENCY : 1752.50 MHz
- ▣ MEASURED OUTPUT POWER: 24.09 dBm = 0.257 W
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  37.09 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
19975 (1712.5)	3,425.00	-47.98	12.35	-53.12	1.95	H	-42.72	66.81
	5,137.50	-40.74	12.36	-38.66	2.38	H	-28.68	52.77
	6,850.00	-56.02	12.15	-49.54	2.80	H	-40.19	64.28
20175 (1732.5)	3,465.00	-50.63	12.27	-55.19	1.87	H	-44.79	68.88
	5,197.50	-44.87	12.63	-43.32	2.45	H	-33.14	57.23
	6,930.00	-57.06	11.87	-49.46	2.84	H	-40.43	64.52
20375 (1752.5)	3,505.00	-51.43	12.15	-55.56	1.98	H	-45.39	69.48
	5,257.50	-45.09	12.89	-44.26	2.41	H	-33.78	57.87
	7,010.00	-56.58	11.61	-49.30	2.91	H	-40.60	64.69

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
  5. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

### 7.8.6 RADIATED SPURIOUS EMISSIONS (10 MHz Band 4 LTE)

▣ OPERATING FREQUENCY :	<u>1750.00 MHz</u>
▣ MEASURED OUTPUT POWER:	<u>24.34 dBm = 0.271 W</u>
▣ MODULATION SIGNAL:	<u>10 MHz QPSK</u>
▣ DISTANCE:	<u>3 meters</u>
▣ LIMIT: $43 + 10 \log_{10}(W) =$	<u>37.34 dBc</u>

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20000 (1715.0)	3,430.00	-47.98	12.34	-53.21	1.95	H	-42.82	67.16
	5,145.00	-42.67	12.38	-40.63	2.39	H	-30.64	54.98
	6,860.00	-56.44	12.11	-50.00	2.81	V	-40.70	65.04
20175 (1732.5)	3,465.00	-51.48	12.27	-56.04	1.87	H	-45.64	69.98
	5,197.50	-42.65	12.63	-41.10	2.45	H	-30.92	55.26
	6,930.00	-56.91	11.87	-49.31	2.84	H	-40.28	64.62
20350 (1750.0)	3,500.00	-51.19	12.15	-55.34	1.95	H	-45.14	69.48
	5,250.00	-44.47	12.87	-43.63	2.39	H	-33.15	57.49
	7,000.00	-56.51	11.65	-49.84	2.85	V	-41.04	65.38

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
  5. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

### 7.8.7 RADIATED SPURIOUS EMISSIONS (15 MHz Band 4 LTE)

- ▣ OPERATING FREQUENCY : 1747.50 MHz
- ▣ MEASURED OUTPUT POWER: 24.34 dBm = 0.272 W
- ▣ MODULATION SIGNAL: 15 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  37.34 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20025 (1717.5)	3,435.00	-48.76	12.34	-53.74	1.92	H	-43.32	67.66
	5,152.50	-41.70	12.40	-39.81	2.39	H	-29.80	54.14
	6,870.00	-57.44	12.08	-51.18	2.79	V	-41.89	66.23
20175 (1732.5)	3,465.00	-51.18	12.27	-55.74	1.87	H	-45.34	69.68
	5,197.50	-43.65	12.63	-42.10	2.45	H	-31.92	56.26
	6,930.00	-57.01	11.87	-49.41	2.84	V	-40.38	64.72
20325 (1747.5)	3,495.00	-50.50	12.17	-54.77	1.93	H	-44.53	68.87
	5,242.50	-44.27	12.83	-43.28	2.41	H	-32.86	57.20
	6,990.00	-57.24	11.68	-49.33	2.80	H	-40.45	64.79

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
  5. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

### 7.8.8 RADIATED SPURIOUS EMISSIONS (20 MHz Band 4 LTE)

- ▣ OPERATING FREQUENCY : 1732.50 MHz
- ▣ MEASURED OUTPUT POWER: 23.90 dBm = 0.246 W
- ▣ MODULATION SIGNAL: 20 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  36.90 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20050 (1720.0)	3,440.00	-48.40	12.33	-53.11	1.89	H	-42.67	66.57
	5,160.00	-41.68	12.44	-39.89	2.40	H	-29.85	53.75
	6,880.00	-57.06	12.04	-50.35	2.78	H	-41.09	64.99
20175 (1732.5)	3,465.00	-50.33	12.27	-54.89	1.87	H	-44.49	68.39
	5,197.50	-42.89	12.63	-41.34	2.45	H	-31.16	55.06
	6,930.00	-56.57	11.87	-48.97	2.84	H	-39.94	63.84
20300 (1745.0)	3,490.00	-51.23	12.18	-55.63	1.90	H	-45.35	69.25
	5,235.00	-43.31	12.80	-42.12	2.42	H	-31.74	55.64
	6,980.00	-56.34	11.71	-48.18	2.79	H	-39.26	63.16

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
  5. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

## 7.9 RADIATED SPURIOUS EMISSIONS \_ With wireless charging pad

### 7.9.1 RADIATED SPURIOUS EMISSIONS (5 MHz Band 17 LTE)

▣ OPERATING FREQUENCY :	<u>713.5 MHz</u>
▣ MEASURED OUTPUT POWER:	<u>18.18 dBm = 0.066 W</u>
▣ MODULATION SIGNAL:	<u>5 MHz QPSK</u>
▣ DISTANCE:	<u>3 meters</u>
▣ LIMIT: $43 + 10 \log_{10}(W) =$	<u>31.18 dBc</u>

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	ERP (dBm)	dBc
23755 (706.50)	1,413.00	-56.31	7.82	-62.09	1.18	H	-55.45	73.63
	2,119.50	-54.44	9.55	-59.63	1.46	V	-51.54	69.72
	2,826.00	-56.71	10.84	-60.70	1.71	V	-51.57	69.75
23790 (710.00)	1,420.00	-56.08	7.86	-61.79	1.19	H	-55.12	73.30
	2,130.00	-55.57	9.49	-60.01	1.45	H	-51.97	70.15
	2,840.00	-55.44	10.90	-59.34	1.72	H	-50.16	68.34
23825 (713.50)	1,427.00	-54.59	7.90	-60.18	1.19	H	-53.47	71.65
	2,140.50	-55.03	9.42	-59.51	1.46	H	-51.55	69.73
	2,854.00	-56.76	10.95	-60.84	1.69	V	-51.58	69.76

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case
  5. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

### 7.9.2 RADIATED SPURIOUS EMISSIONS (10 MHz Band 17 LTE)

- ▣ OPERATING FREQUENCY : 710.0 MHz
- ▣ MEASURED OUTPUT POWER: 17.84 dBm = 0.061 W
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  30.84 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	ERP (dBm)	dBc
23780 (709.00)	1,418.00	-56.30	7.85	-62.03	1.19	V	-55.37	73.21
	2,127.00	-55.29	9.51	-59.96	1.45	H	-51.90	69.74
	2,836.00	-55.55	10.88	-59.45	1.71	V	-50.28	68.12
23790 (710.00)	1,420.00	-55.08	7.86	-60.79	1.19	V	-54.12	71.96
	2,130.00	-55.77	9.49	-60.21	1.45	H	-52.17	70.01
	2,840.00	-56.56	10.90	-60.46	1.72	H	-51.28	69.12
23800 (711.00)	1,422.00	-56.07	7.87	-61.74	1.19	H	-55.06	72.90
	2,133.00	-55.51	9.47	-59.97	1.45	V	-51.95	69.79
	2,844.00	-56.55	10.92	-60.51	1.71	H	-51.30	69.14

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case
  5. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

### 7.9.3 RADIATED SPURIOUS EMISSIONS (1.4 MHz Band 4 LTE)

- ▣ OPERATING FREQUENCY : 1732.50 MHz
- ▣ MEASURED OUTPUT POWER: 21.32 dBm = 0.136 W
- ▣ MODULATION SIGNAL: 1.4 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  34.32 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
19957 (1710.7)	3,421.40	-46.74	12.36	-51.82	1.94	V	-41.40	62.72
	5,132.10	-42.75	12.34	-40.83	2.37	V	-30.86	52.18
	6,842.80	-55.69	12.17	-49.19	2.81	V	-39.83	61.15
20175 (1732.5)	3,465.00	-52.04	12.27	-56.60	1.87	V	-46.20	67.52
	5,197.50	-44.67	12.63	-43.12	2.45	V	-32.94	54.26
	6,930.00	-57.22	11.87	-49.62	2.84	V	-40.59	61.91
20393 (1754.3)	3,508.60	-52.21	12.15	-56.33	2.00	V	-46.18	67.50
	5,262.90	-47.03	12.91	-46.23	2.41	V	-35.73	57.05
	7,017.20	-57.03	11.57	-49.41	2.90	V	-40.74	62.06

**NOTES:** 1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

2. We are performed all frequency to 10<sup>th</sup> harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

5. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

### 7.9.4 RADIATED SPURIOUS EMISSIONS (3 MHz Band 4 LTE)

- ▣ OPERATING FREQUENCY : 1732.50 MHz
- ▣ MEASURED OUTPUT POWER: 21.05 dBm = 0.127 W
- ▣ MODULATION SIGNAL: 3 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  34.05 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
19965 (1711.5)	3,423.00	-46.71	12.35	-51.81	1.94	V	-41.40	62.45
	5,134.50	-42.06	12.35	-40.07	2.37	V	-30.09	51.14
	6,846.00	-56.72	12.16	-50.23	2.80	V	-40.87	61.92
20175 (1732.5)	3,465.00	-52.44	12.27	-57.00	1.87	V	-46.60	67.65
	5,197.50	-44.63	12.63	-43.08	2.45	V	-32.90	53.95
	6,930.00	-56.63	11.87	-49.03	2.84	V	-40.00	61.05
20385 (1753.5)	3,507.00	-53.02	12.15	-57.14	1.99	V	-46.98	68.03
	5,260.50	-46.05	12.90	-45.22	2.42	V	-34.74	55.79
	7,014.00	-56.19	11.59	-48.72	2.91	V	-40.04	61.09

**NOTES:** 1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method

according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:

2. We are performed all frequency to 10<sup>th</sup> harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

5. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

### 7.9.5 RADIATED SPURIOUS EMISSIONS (5 MHz Band 4 LTE)

- ▣ OPERATING FREQUENCY : 1732.50 MHz
- ▣ MEASURED OUTPUT POWER: 21.14 dBm = 0.130 W
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  34.14 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
19975 (1712.5)	3,425.00	-46.80	12.35	-51.94	1.95	V	-41.54	62.68
	5,137.50	-42.50	12.36	-40.42	2.38	V	-30.44	51.58
	6,850.00	-57.06	12.15	-50.58	2.80	V	-41.23	62.37
20175 (1732.5)	3,465.00	-52.28	12.27	-56.84	1.87	V	-46.44	67.58
	5,197.50	-44.91	12.63	-43.36	2.45	V	-33.18	54.32
	6,930.00	-56.83	11.87	-49.23	2.84	V	-40.20	61.34
20375 (1752.5)	3,505.00	-52.78	12.15	-56.91	1.98	V	-46.74	67.88
	5,257.50	-46.50	12.89	-45.67	2.41	V	-35.19	56.33
	7,010.00	-56.91	11.61	-49.63	2.91	V	-40.93	62.07

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
  5. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

### 7.9.6 RADIATED SPURIOUS EMISSIONS (10 MHz Band 4 LTE)

- ▣ OPERATING FREQUENCY : 1732.50 MHz
- ▣ MEASURED OUTPUT POWER: 21.39 dBm = 0.138 W
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  34.39 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20000 (1715.0)	3,430.00	-47.20	12.34	-52.43	1.95	V	-42.04	63.43
	5,145.00	-43.03	12.38	-40.99	2.39	V	-31.00	52.39
	6,860.00	-57.50	12.11	-51.06	2.81	V	-41.76	63.15
20175 (1732.5)	3,465.00	-52.50	12.27	-57.06	1.87	V	-46.66	68.05
	5,197.50	-45.63	12.63	-44.08	2.45	V	-33.90	55.29
	6,930.00	-56.58	11.87	-48.98	2.84	V	-39.95	61.34
20350 (1750.0)	3,500.00	-52.90	12.15	-57.05	1.95	V	-46.85	68.24
	5,250.00	-47.11	12.87	-46.27	2.39	V	-35.79	57.18
	7,000.00	-56.52	11.65	-49.85	2.85	V	-41.05	62.44

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
  5. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

### 7.9.7 RADIATED SPURIOUS EMISSIONS (15 MHz Band 4 LTE)

- ▣ OPERATING FREQUENCY : 1732.50 MHz
- ▣ MEASURED OUTPUT POWER: 21.23 dBm = 0.133 W
- ▣ MODULATION SIGNAL: 15 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  34.23 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20025 (1717.5)	3,435.00	-48.90	12.34	-53.88	1.92	V	-43.46	64.69
	5,152.50	-43.45	12.40	-41.56	2.39	V	-31.55	52.78
	6,870.00	-56.63	12.08	-50.37	2.79	V	-41.08	62.31
20175 (1732.5)	3,465.00	-52.08	12.27	-56.64	1.87	V	-46.24	67.47
	5,197.50	-45.12	12.63	-43.57	2.45	V	-33.39	54.62
	6,930.00	-56.67	11.87	-49.07	2.84	V	-40.04	61.27
20325 (1747.5)	3,495.00	-52.18	12.17	-56.45	1.93	V	-46.21	67.44
	5,242.50	-46.62	12.83	-45.63	2.41	V	-35.21	56.44
	6,990.00	-56.92	11.68	-49.01	2.80	V	-40.13	61.36

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
  5. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

### 7.9.8 RADIATED SPURIOUS EMISSIONS (20 MHz Band 4 LTE)

- ▣ OPERATING FREQUENCY : 1732.50 MHz
- ▣ MEASURED OUTPUT POWER: 21.04 dBm = 0.127 W
- ▣ MODULATION SIGNAL: 20 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT:  $43 + 10 \log_{10}(W) =$  34.04 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20050 (1720.0)	3,440.00	-47.82	12.33	-52.53	1.89	V	-42.09	63.13
	5,160.00	-42.03	12.44	-40.24	2.40	V	-30.20	51.24
	6,880.00	-56.62	12.04	-49.91	2.78	V	-40.65	61.69
20175 (1732.5)	3,465.00	-50.58	12.27	-55.14	1.87	V	-44.74	65.78
	5,197.50	-45.38	12.63	-43.83	2.45	V	-33.65	54.69
	6,930.00	-56.64	11.87	-49.04	2.84	V	-40.01	61.05
20300 (1745.0)	3,490.00	-52.64	12.18	-57.04	1.90	V	-46.76	67.80
	5,235.00	-44.79	12.80	-43.60	2.42	V	-33.22	54.26
	6,980.00	-56.48	11.71	-48.32	2.79	V	-39.40	60.44

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-C-2004, Aug. 17, 2004:
  2. We are performed all frequency to 10<sup>th</sup> harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
  3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
  4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
  5. We were attached the results of standalone with wireless charging cover (close). Because the results of close condition is higher than open condition.

### 7.10 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB )
Band 17	5 MHz	710.0	QPSK	25	0	4.95
			16-QAM	25	0	5.75
	10 MHz		QPSK	50	0	4.84
			16-QAM	50	0	5.65

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB )
Band 4	1.4 MHz	1732.5	QPSK	6	0	5.27
			16-QAM	6	0	6.09
	3 MHz		QPSK	15	0	5.22
			16-QAM	15	0	6.07
	5 MHz		QPSK	25	0	5.20
			16-QAM	25	0	5.94
	10 MHz		QPSK	50	0	5.20
			16-QAM	50	0	5.94
	15 MHz		QPSK	75	0	5.13
			16-QAM	75	0	5.89
	20 MHz		QPSK	100	0	5.17
			16-QAM	100	0	5.97

- Plots of the EUT's Peak- to- Average Ratio are shown Page 85~ 92.

**7.11 OCCUPIED BANDWIDTH**

Band	Band Width (MHz)	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data ( MHz )
Band 17	5	710.0	QPSK	25	0	4.5039
			16-QAM	25	0	4.5016
	10		QPSK	50	0	8.9685
			16-QAM	50	0	8.9499

Band	Band Width (MHz)	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data ( MHz )
Band 4	1.4	1732.5	QPSK	6	0	1.0916
			16-QAM	6	0	1.0905
	3		QPSK	15	0	2.6965
			16-QAM	15	0	2.6941
	5		QPSK	25	0	4.4945
			16-QAM	25	0	4.4905
	10		QPSK	50	0	8.9971
			16-QAM	50	0	8.9579
	15		QPSK	75	0	13.4750
			16-QAM	75	0	13.4640
	20		QPSK	100	0	17.9590
			16-QAM	100	0	17.9570

- Plots of the EUT's Occupied Bandwidth are shown Page 77 ~ 84.

## 7.12 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Frequency of Maximum Harmonic (GHz)	Maximum Data [dBm]
Band 17	5	706.5	QPSK	1	0	2.839044	-31.10
		710.0		1	0	3.145693	-31.81
		713.5		1	0	3.139729	-32.06
	10	709.0		1	0	3.164579	-32.01
		710.0		1	0	2.684477	-32.49
		711.0		1	0	3.685435	-32.40
				1	0		

Band	Band Width (MHz)	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Frequency of Maximum Harmonic (GHz)	Maximum Data [dBm]
Band 4	1.4	1710.7	QPSK	1	0	16.8825	-27.62
		1732.5		1	0	18.9110	-27.07
		1754.3		1	0	16.5365	-28.05
	3	1711.5		1	0	16.5330	-28.25
		1732.5		1	0	16.6025	-28.06
		1753.5		1	0	19.0205	-28.05
	5	1712.5		1	0	18.9245	-28.67
		1732.5		1	0	19.1155	-27.74
		1752.5		1	0	16.2900	-28.13
	10	1715.0		1	0	16.4705	-27.53
		1732.5		1	0	16.5840	-28.31
		1750.0		1	0	19.0520	-27.71
	15	1717.5		1	0	19.0515	-28.17
		1732.5		1	0	16.8755	-27.27
		1747.5		1	0	16.7510	-27.59
	20	1720.0		1	0	19.0065	-27.70
		1732.5		1	0	18.9510	-27.57
		1745.0		1	0	16.4680	-27.79

- Plots of the EUT's Conducted Spurious Emissions are shown Page 117 ~ 140.

### 7.12.1 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 93 ~ 116

### 7.13 RECEIVER SPURIOUS EMISSIONS\_ Standalone with normal cover

FCC Rule(s) RSS-Gen  
 Test Requirements: Emission Level shall not exceed RSS-Gen 6(a) limits  
 Operating conditions: Under normal test conditions  
 Method of testing: Radiated

S/A. Settings: F < 1 GHz: RBW: 100 kHz, VBW: 300 kHz (Peak)  
 F > 1 GHz: RBW: 1 MHz, VBW: 1 MHz (Peak)  
 Mode of operation: Receive

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
30 – 88	100 (40 dBuV)	3
88 - 216	150 (43.5 dBuV))	3
216 – 960	200 (46 dBuV)	3
Above 960	500 (54 dBuV)	3

**Operation Mode: Receive:**

30 MHz ~ 1 GHz

Frequency MHz	Reading dBuV	Factor (dB)	ANT POL (H/V)	Total dBuV/m	Limit dBuV/m	Margin dB
No Critical peaks found						

Above 1 GHz

Frequency MHz	Reading dBuV	Factor (dB)	ANT POL (H/V)	Total dBuV/m	Limit dBuV/m	Margin dB
No Critical peaks found						

### 7.14 RECEIVER SPURIOUS EMISSIONS\_ Standalone with wireless charging cover

**(close)**

FCC Rule(s) RSS-Gen  
 Test Requirements: Emission Level shall not exceed RSS-Gen 6(a) limits  
 Operating conditions: Under normal test conditions  
 Method of testing: Radiated

S/A. Settings: F < 1 GHz: RBW: 100 kHz, VBW: 300 kHz (Peak)  
 F > 1 GHz: RBW: 1 MHz, VBW: 1 MHz (Peak)  
 Mode of operation: Receive

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
30 – 88	100 (40 dBuV)	3
88 - 216	150 (43.5 dBuV))	3
216 – 960	200 (46 dBuV)	3
Above 960	500 (54 dBuV)	3

**Operation Mode: Receive:**

30 MHz ~ 1 GHz

Frequency MHz	Reading dBuV	Factor (dB)	ANT POL (H/V)	Total dBuV/m	Limit dBuV/m	Margin dB
No Critical peaks found						

Above 1 GHz

Frequency MHz	Reading dBuV	Factor (dB)	ANT POL (H/V)	Total dBuV/m	Limit dBuV/m	Margin dB
No Critical peaks found						

## 7.15 RECEIVER SPURIOUS EMISSIONS\_With wireless charging pad

FCC Rule(s)	RSS-Gen
Test Requirements:	Emission Level shall not exceed RSS-Gen 6(a) limits
Operating conditions:	Under normal test conditions
Method of testing:	Radiated
S/A. Settings:	F < 1 GHz: RBW: 100 kHz, VBW: 300 kHz (Peak) F > 1 GHz: RBW: 1 MHz, VBW: 1 MHz (Peak)
Mode of operation:	Receive

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
30 – 88	100 (40 dBuV)	3
88 - 216	150 (43.5 dBuV))	3
216 – 960	200 (46 dBuV)	3
Above 960	500 (54 dBuV)	3

### Operation Mode: Receive:

30 MHz ~ 1 GHz

Frequency MHz	Reading dBuV	Factor (dB)	ANT POL (H/V)	Total dBuV/m	Limit dBuV/m	Margin dB
No Critical peaks found						

Above 1 GHz


Frequency MHz	Reading dBuV	Factor (dB)	ANT POL (H/V)	Total dBuV/m	Limit dBuV/m	Margin dB
No Critical peaks found						

## 7.16 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

### 7.16.1 FREQUENCY STABILITY (5 MHz Band 17 LTE)

- ▣ OPERATING FREQUENCY: 710,000,000 Hz
- ▣ CHANNEL: 23790 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: -


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	709 999 998	0	0.000 000	0.000
100%		-30	710 000 000	2.60	0.000 000	0.004
100%		-20	709 999 995	-2.80	0.000 000	-0.004
100%		-10	709 999 995	-2.10	0.000 000	-0.003
100%		0	710 000 001	3.70	0.000 001	0.005
100%		+10	710 000 001	3.10	0.000 000	0.004
100%		+30	710 000 000	2.60	0.000 000	0.004
100%		+40	710 000 000	2.20	0.000 000	0.003
100%		+50	710 000 002	4.00	0.000 001	0.006
Batt. Endpoint		3.27	+20	710 000 000	2.80	0.000 000

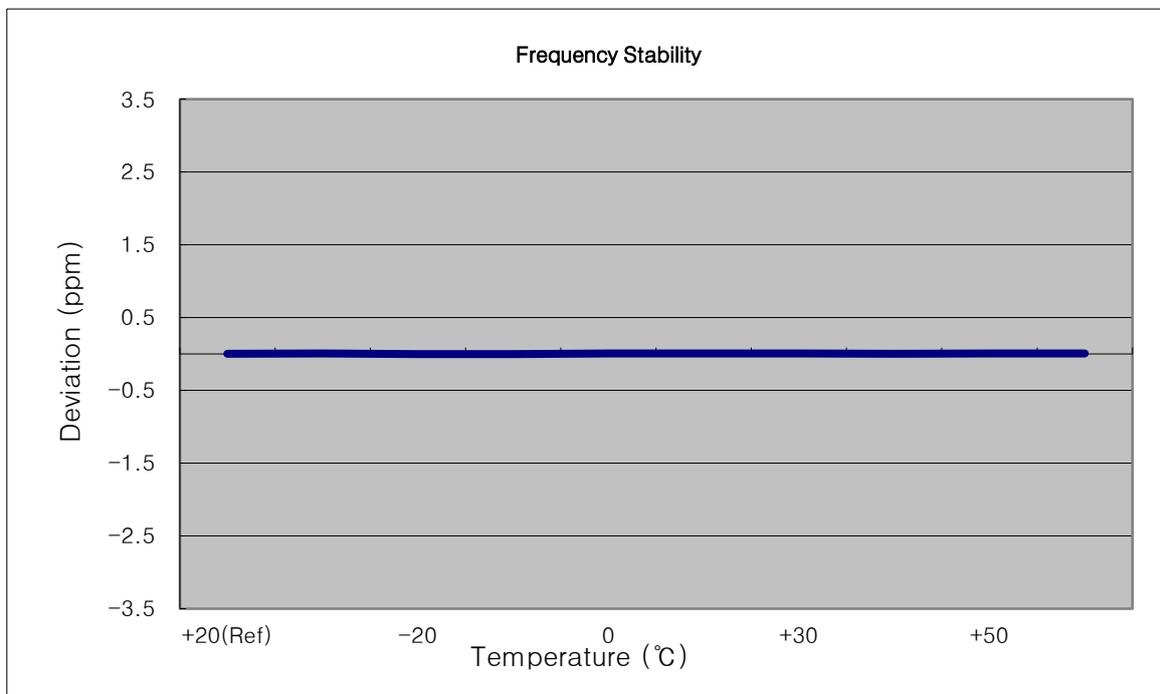

**7.16.2 FREQUENCY STABILITY (10 MHz Band 17 LTE)**

- ▣ OPERATING FREQUENCY: 710,000,000 Hz
- ▣ CHANNEL: 23790 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: -


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	710 000 007	0	0.000 000	0.000
100%		-30	710 000 010	2.90	0.000 000	0.004
100%		-20	710 000 010	3.40	0.000 000	0.005
100%		-10	710 000 009	2.40	0.000 000	0.003
100%		0	710 000 004	-2.40	0.000 000	-0.003
100%		+10	710 000 005	-2.00	0.000 000	-0.003
100%		+30	710 000 002	-4.40	-0.000 001	-0.006
100%		+40	710 000 003	-4.00	-0.000 001	-0.006
100%		+50	710 000 001	-5.50	-0.000 001	-0.008
Batt. Endpoint	3.27	+20	710 000 003	-3.60	-0.000 001	-0.005

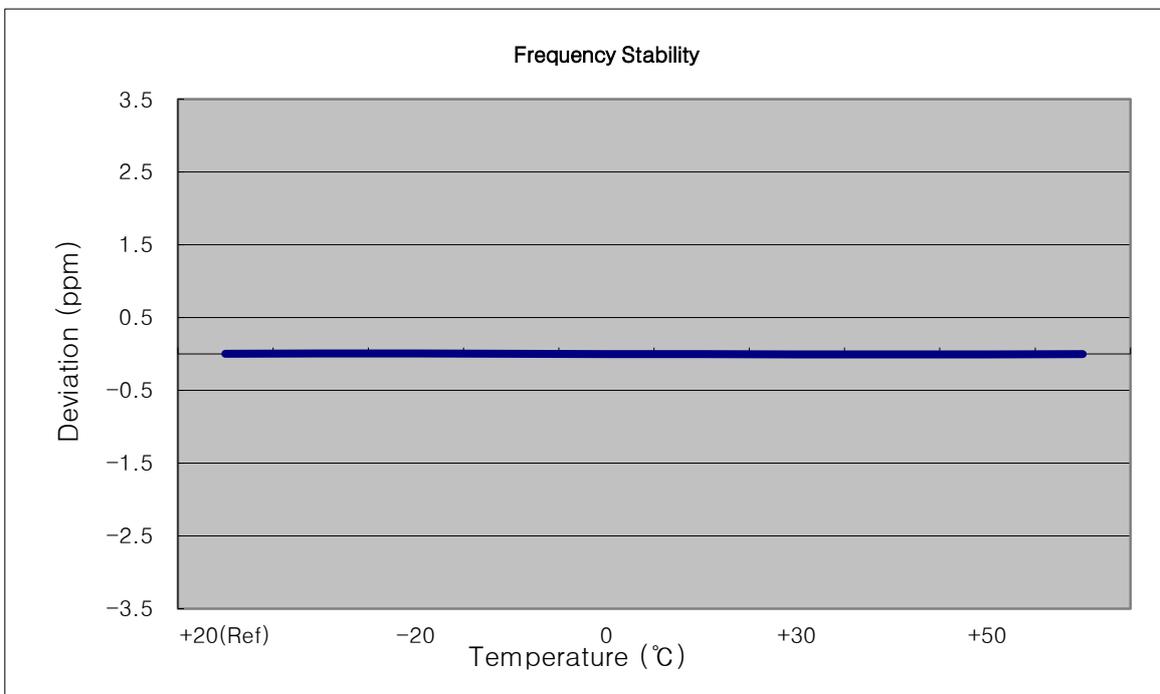

**7.16.3 FREQUENCY STABILITY (1.4 MHz Band 4 LTE)**

- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: -


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	1732 499 996	0	0.000 000	0.000
100%		-30	1732 500 004	7.70	0.000 000	0.004
100%		-20	1732 499 992	-3.80	0.000 000	-0.002
100%		-10	1732 500 005	8.90	0.000 001	0.005
100%		0	1732 500 000	3.90	0.000 000	0.002
100%		+10	1732 500 001	4.90	0.000 000	0.003
100%		+30	1732 500 000	4.20	0.000 000	0.002
100%		+40	1732 500 000	3.90	0.000 000	0.002
100%		+50	1732 500 000	4.00	0.000 000	0.002
Batt. Endpoint		3.27	+20	1732 499 998	2.30	0.000 000

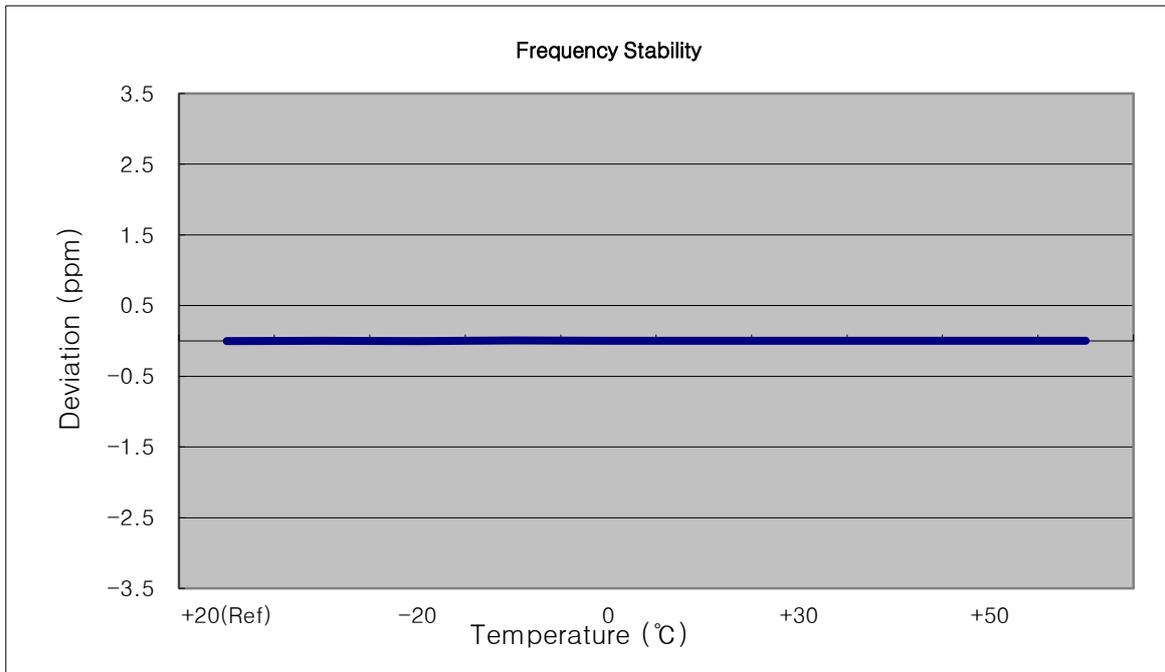

**7.16.4 FREQUENCY STABILITY (3 MHz Band 4 LTE)**

- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: -


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	1732 499 997	0	0.000 000	0.000
100%		-30	1732 500 000	3.30	0.000 000	0.002
100%		-20	1732 500 004	7.40	0.000 000	0.004
100%		-10	1732 500 000	3.80	0.000 000	0.002
100%		0	1732 500 004	7.30	0.000 000	0.004
100%		+10	1732 500 007	10.40	0.000 001	0.006
100%		+30	1732 500 005	8.80	0.000 001	0.005
100%		+40	1732 500 007	10.20	0.000 001	0.006
100%		+50	1732 500 004	7.70	0.000 000	0.004
Batt. Endpoint		3.27	+20	1732 499 993	-3.90	0.000 000

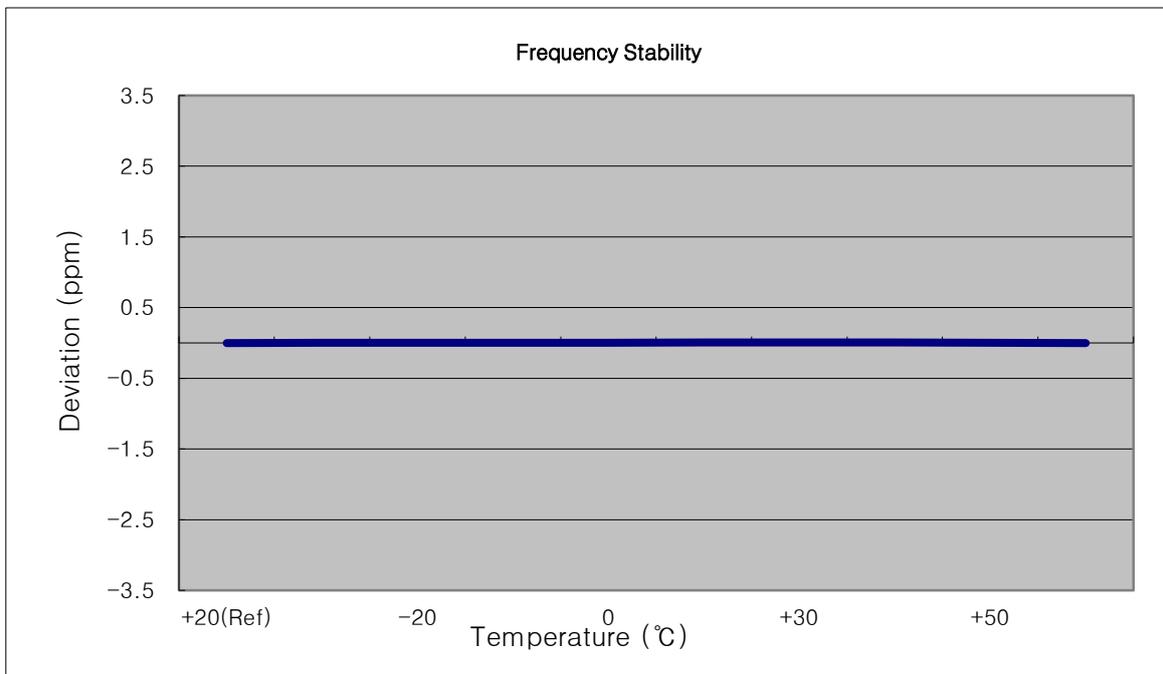

**7.16.5 FREQUENCY STABILITY (5 MHz Band 4 LTE)**

- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: -


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	1732 499 992	0	0.000 000	0.000
100%		-30	1732 500 000	8.00	0.000 000	0.005
100%		-20	1732 500 001	8.60	0.000 000	0.005
100%		-10	1732 499 996	3.70	0.000 000	0.002
100%		0	1732 499 998	5.90	0.000 000	0.003
100%		+10	1732 500 004	11.60	0.000 001	0.007
100%		+30	1732 499 987	-4.80	0.000 000	-0.003
100%		+40	1732 499 999	6.90	0.000 000	0.004
100%		+50	1732 499 997	5.30	0.000 000	0.003
Batt. Endpoint		3.27	+20	1732 499 998	6.00	0.000 000

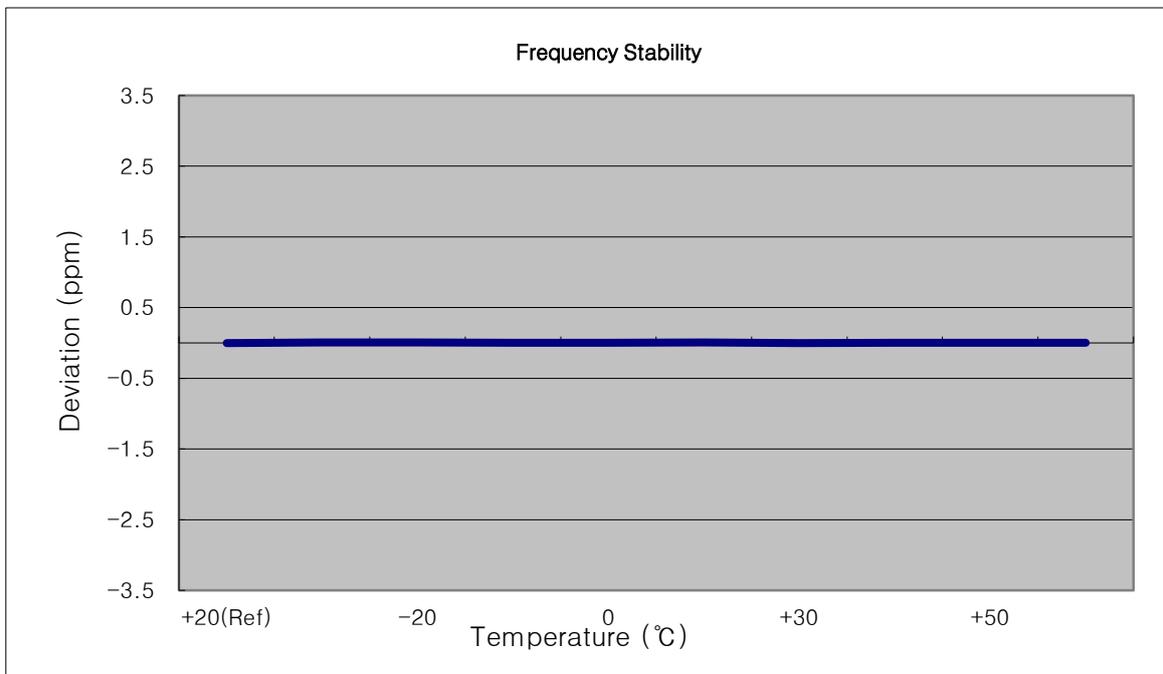

**7.16.6 FREQUENCY STABILITY (10 MHz Band 4 LTE)**

- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: -


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	1732 500 005	0	0.000 000	0.000
100%		-30	1732 500 012	7.40	0.000 000	0.004
100%		-20	1732 500 011	6.20	0.000 000	0.004
100%		-10	1732 500 012	6.90	0.000 000	0.004
100%		0	1732 500 012	7.80	0.000 000	0.005
100%		+10	1732 500 011	6.00	0.000 000	0.003
100%		+30	1732 500 013	8.00	0.000 000	0.005
100%		+40	1732 500 012	7.70	0.000 000	0.004
100%		+50	1732 500 007	2.80	0.000 000	0.002
Batt. Endpoint		3.27	+20	1732 500 002	-2.70	0.000 000

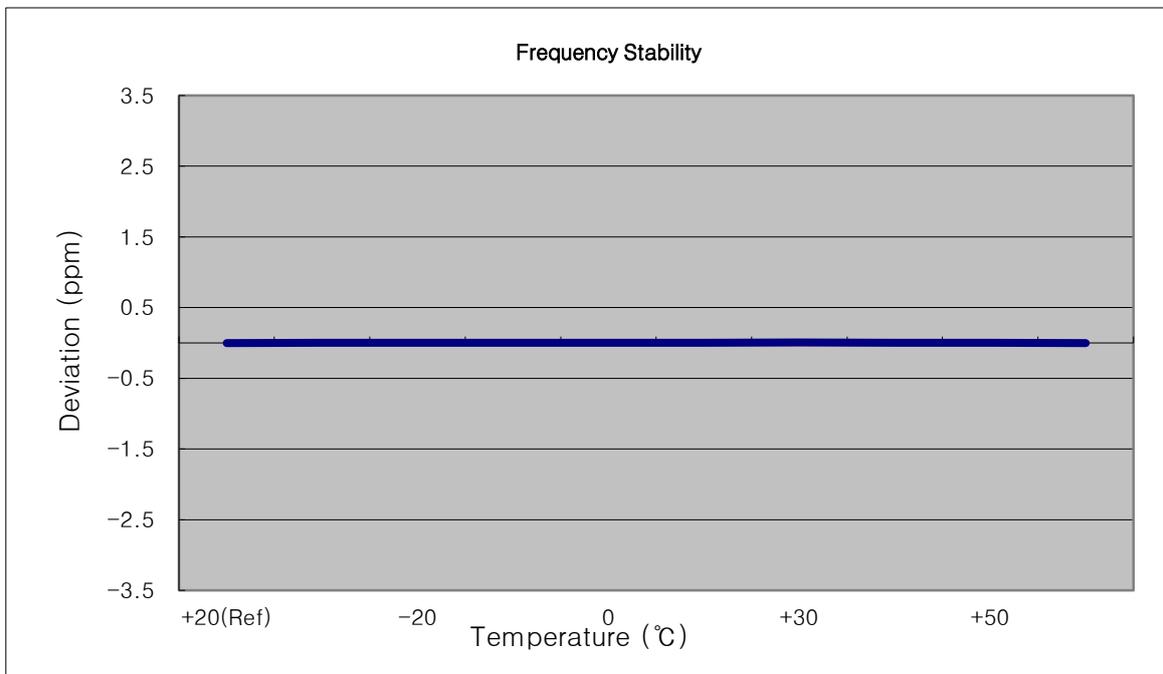

**7.16.7 FREQUENCY STABILITY (15 MHz Band 4 LTE)**

- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: -


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	1732 499 993	0	0.000 000	0.000
100%		-30	1732 499 991	-2.40	0.000 000	-0.001
100%		-20	1732 500 001	8.10	0.000 000	0.005
100%		-10	1732 499 999	6.20	0.000 000	0.004
100%		0	1732 499 997	4.30	0.000 000	0.002
100%		+10	1732 500 001	7.60	0.000 000	0.004
100%		+30	1732 499 998	4.50	0.000 000	0.003
100%		+40	1732 499 989	-4.60	0.000 000	-0.003
100%		+50	1732 499 998	4.90	0.000 000	0.003
Batt. Endpoint		3.27	+20	1732 499 990	-3.00	0.000 000

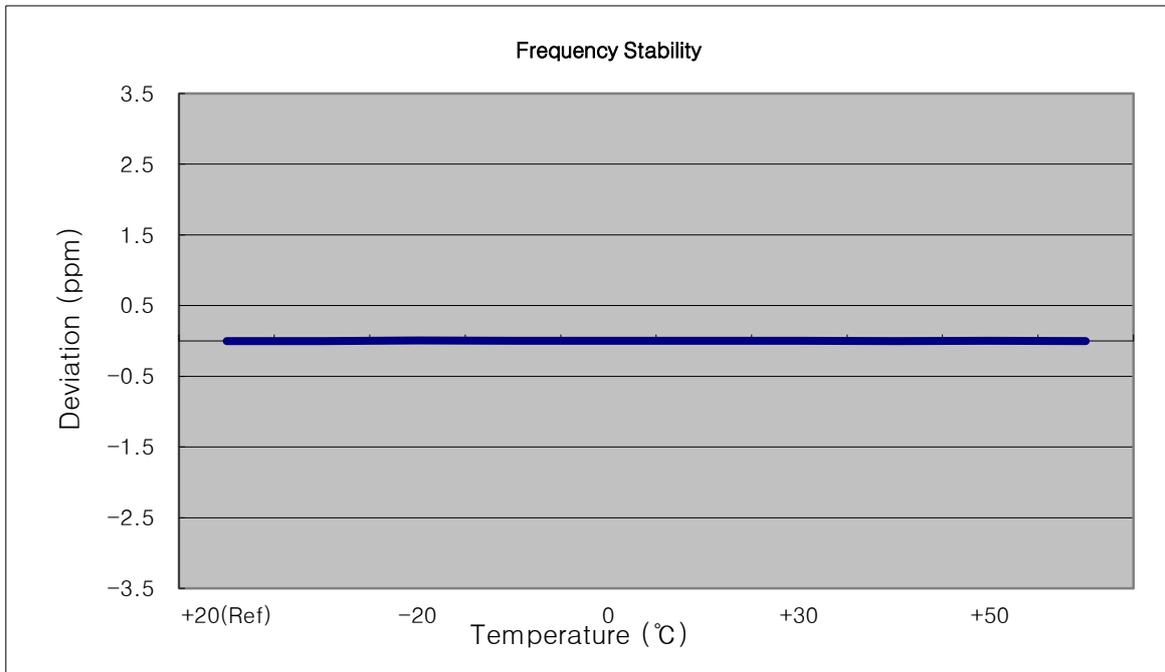

**7.16.8 FREQUENCY STABILITY (20 MHz Band 4 LTE)**


- ▣ OPERATING FREQUENCY: 1732,500,000 Hz
- ▣ CHANNEL: 20175 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: -

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	1732 499 996	0	0.000 000	0.000
100%		-30	1732 500 001	4.90	0.000 000	0.003
100%		-20	1732 500 004	8.00	0.000 000	0.005
100%		-10	1732 500 001	5.30	0.000 000	0.003
100%		0	1732 499 991	-5.50	0.000 000	-0.003
100%		+10	1732 499 988	-8.30	0.000 000	-0.005
100%		+30	1732 500 004	7.80	0.000 000	0.005
100%		+40	1732 500 000	3.80	0.000 000	0.002
100%		+50	1732 500 001	5.20	0.000 000	0.003
Batt. Endpoint		3.27	+20	1732 500 004	8.00	0.000 000

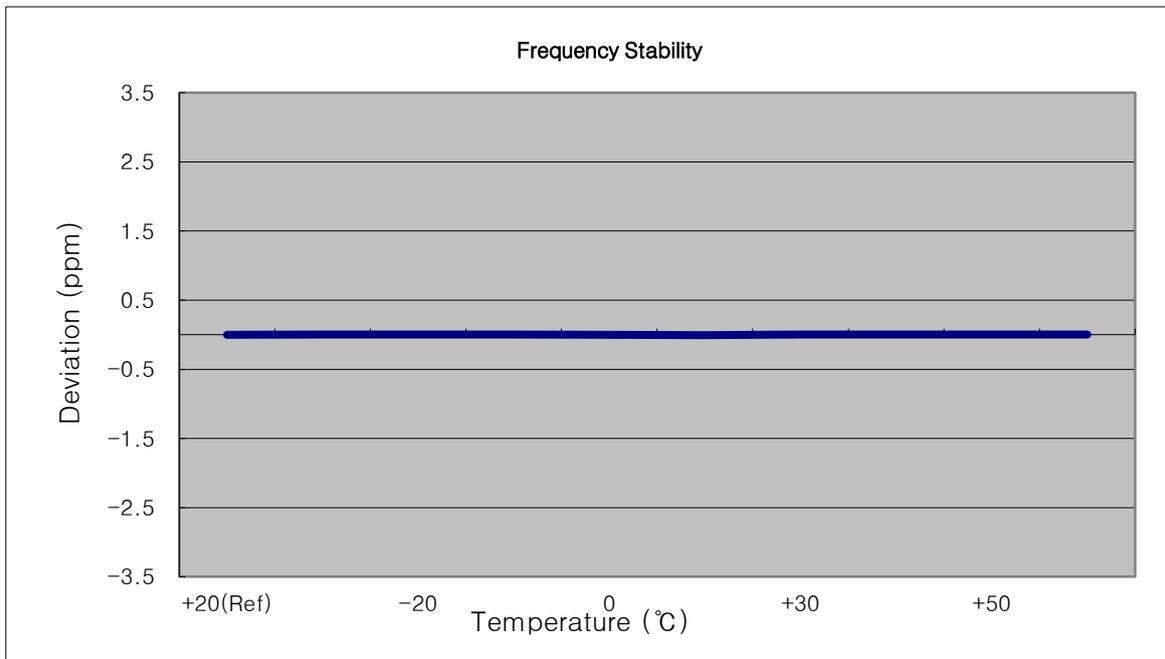


## **8. TEST PLOTS**


BAND 17. Occupied Bandwidth Plot (5M BW Ch.23790 QPSK RB 25)

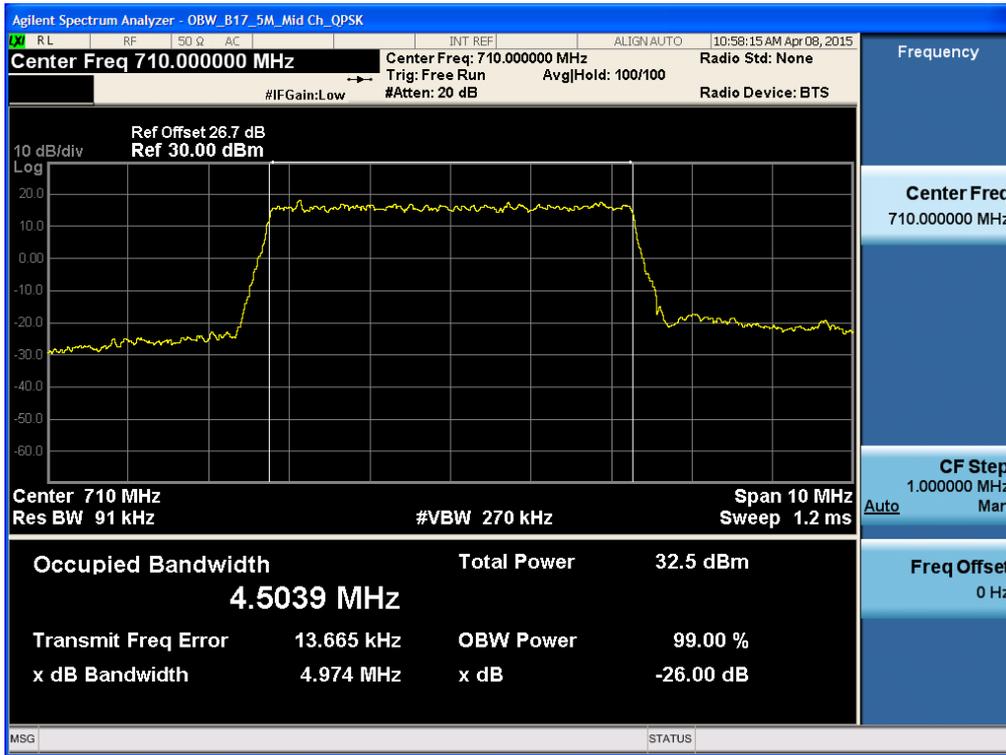


BAND 17. Occupied Bandwidth Plot (5M BW Ch.23790 16QAM RB 25)

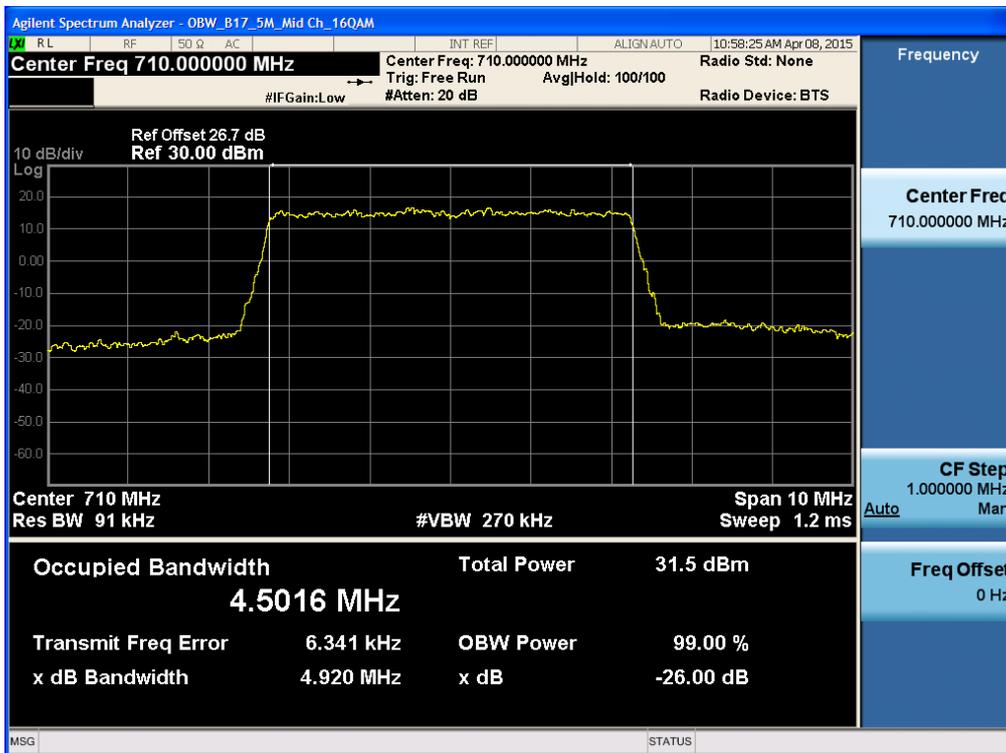


BAND 17. Occupied Bandwidth Plot (10M BW Ch.23790 QPSK RB 50)

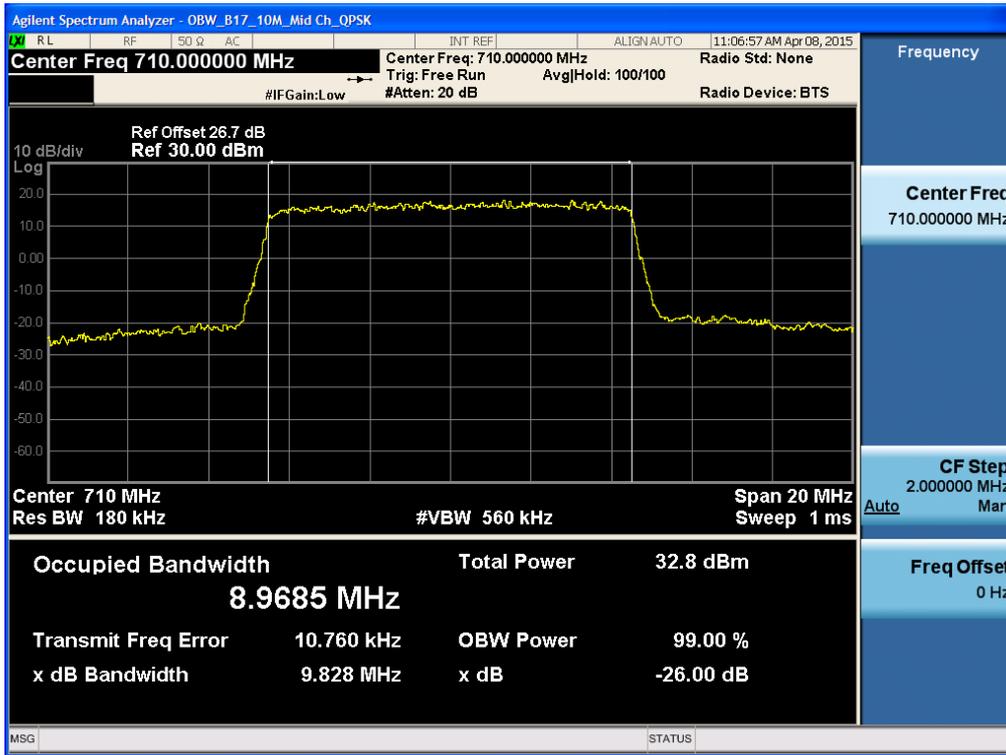


BAND 17. Occupied Bandwidth Plot (10M BW Ch.23790 16QAMRB 50)

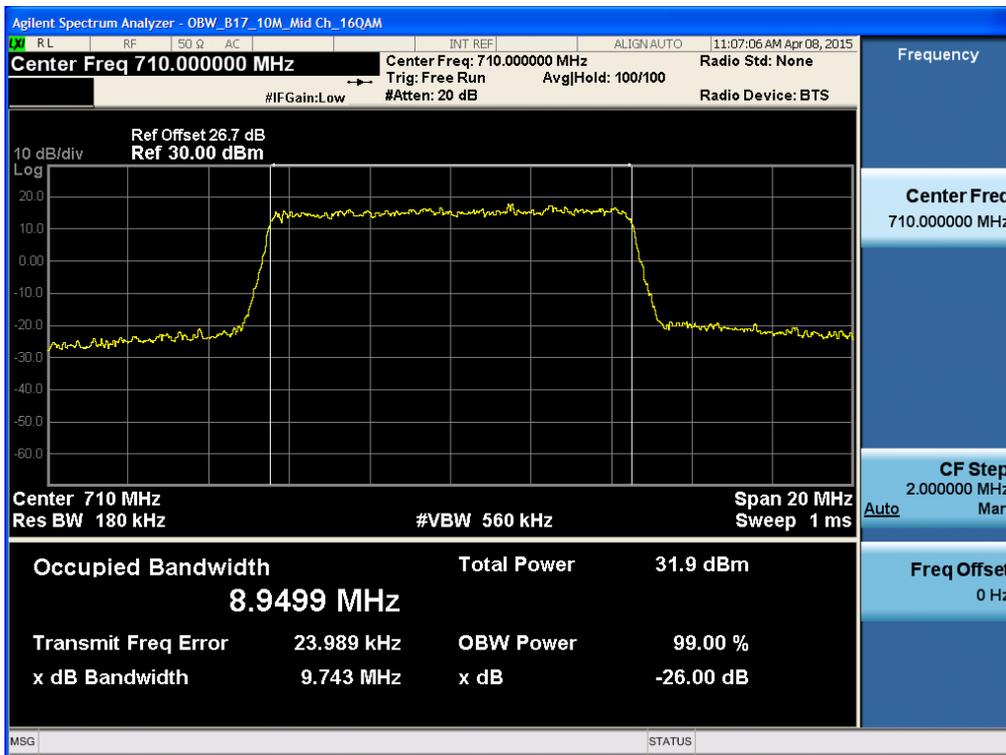


BAND 4. Occupied Bandwidth Plot (1.4M BW Ch.20175 QPSK RB 6)

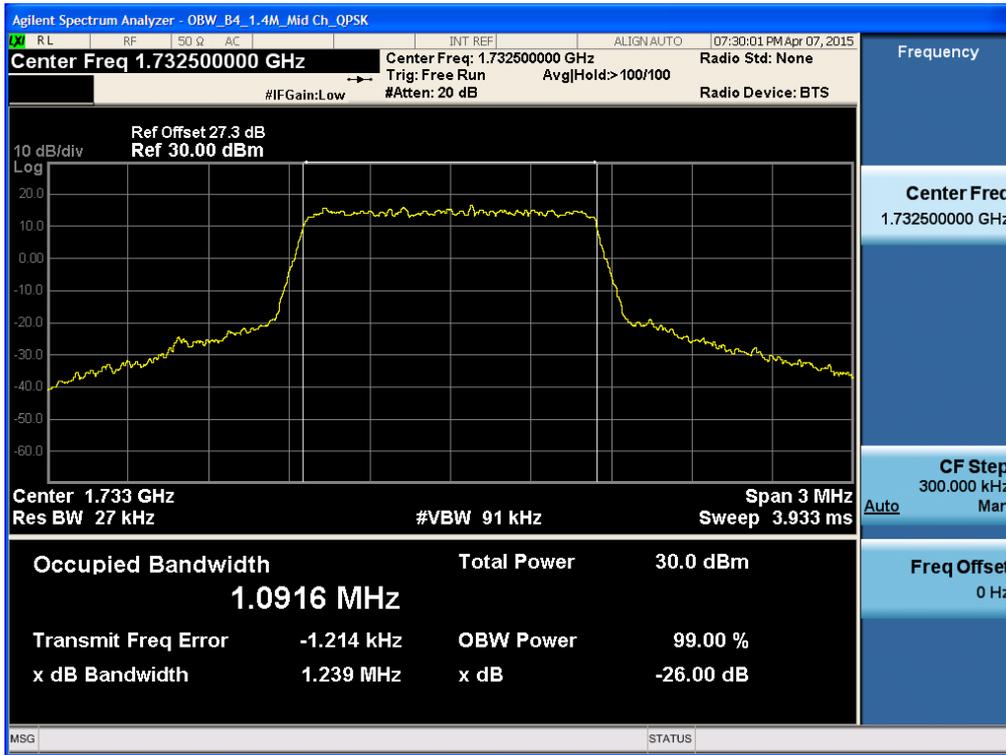


BAND 4. Occupied Bandwidth Plot (1.4M BW Ch.20175 16QAM RB 6)

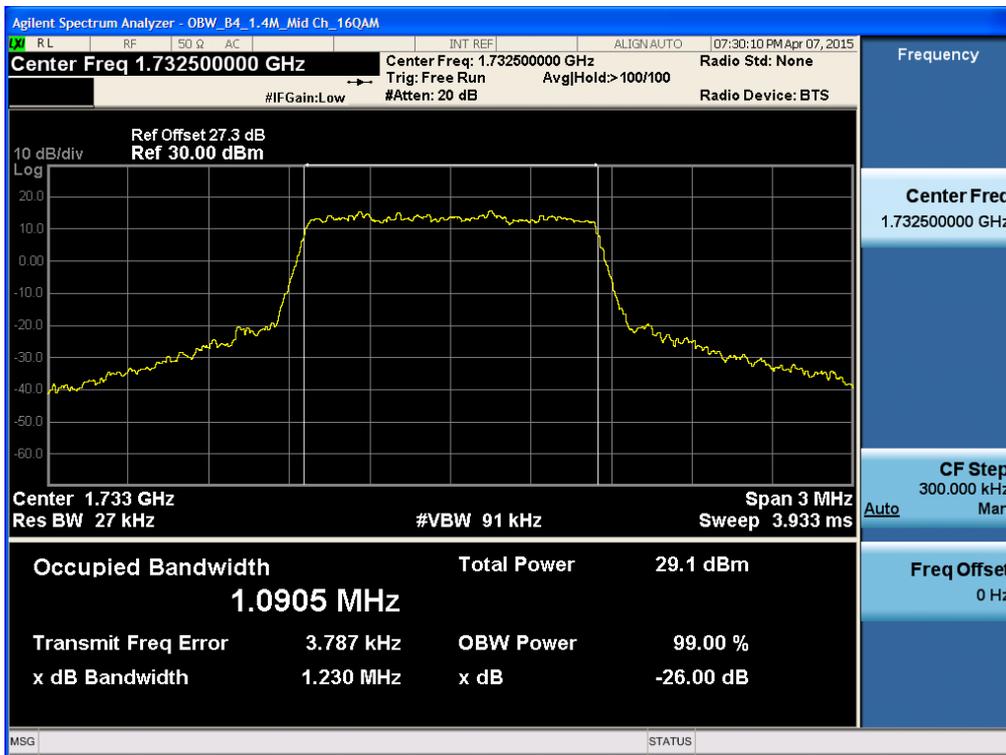


BAND 4. Occupied Bandwidth Plot (3M BW Ch.20175 QPSK RB 15)

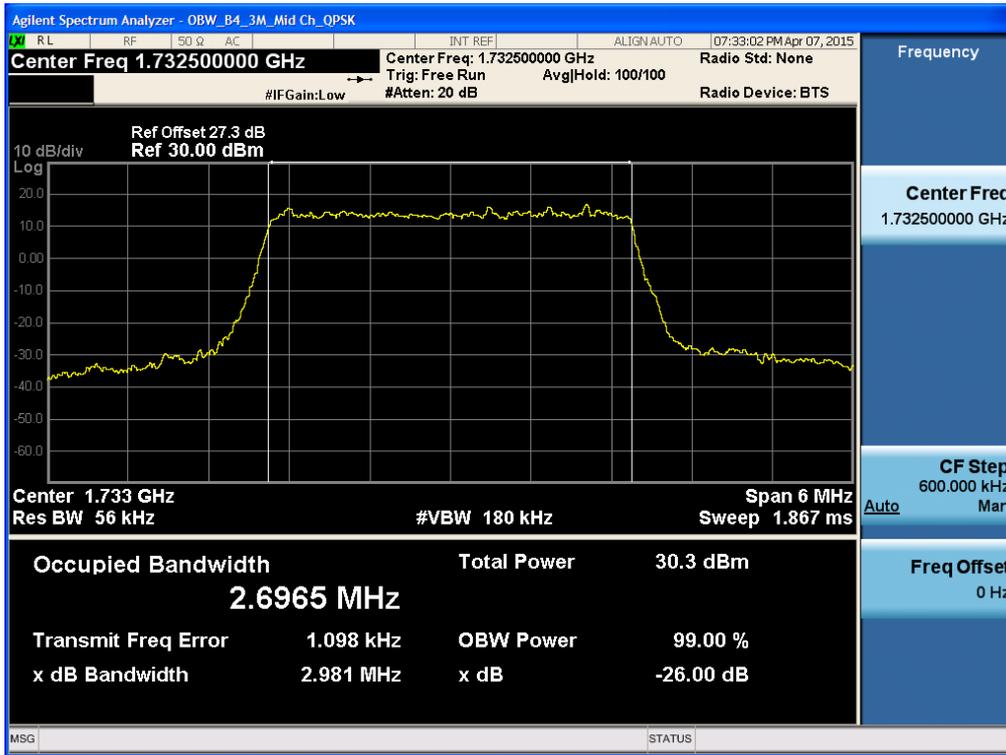


BAND 4. Occupied Bandwidth Plot (3M BW Ch.20175 16QAM RB 15)

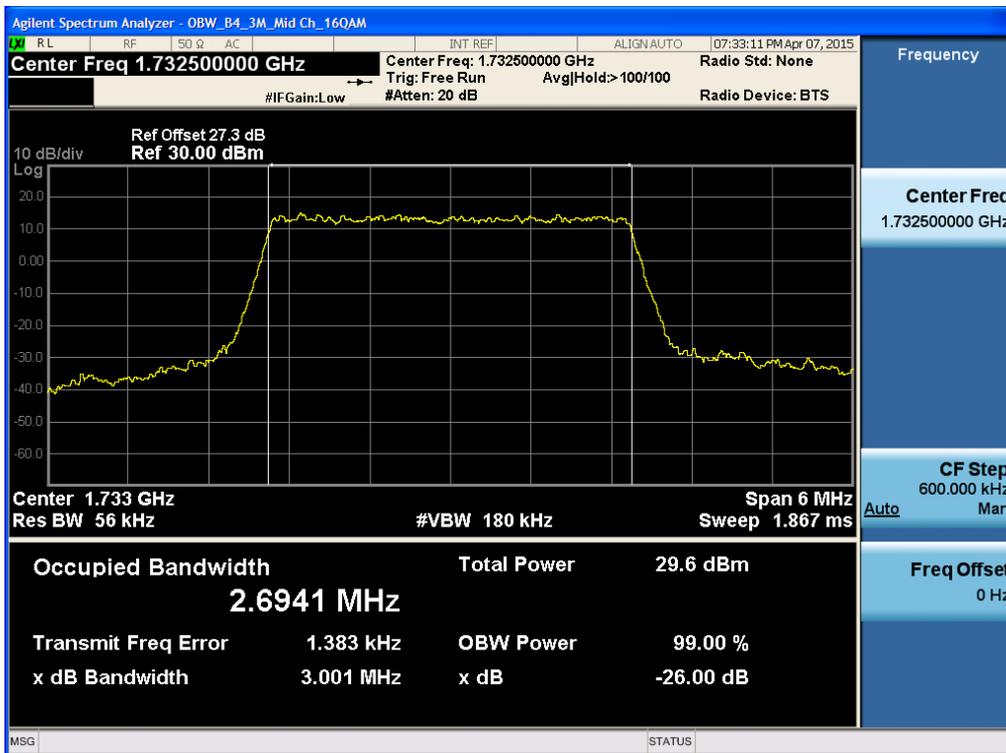


BAND 4. Occupied Bandwidth Plot (5M BW Ch.20175 QPSK RB 25)

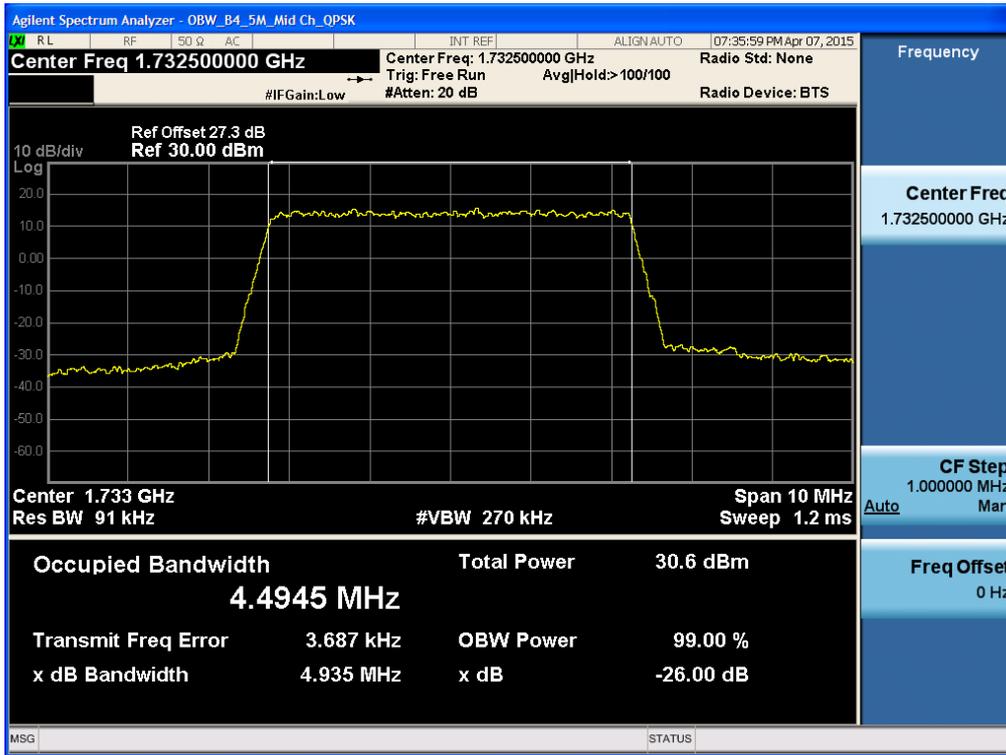


BAND 4. Occupied Bandwidth Plot (5M BW Ch.20175 16QAM RB 25)

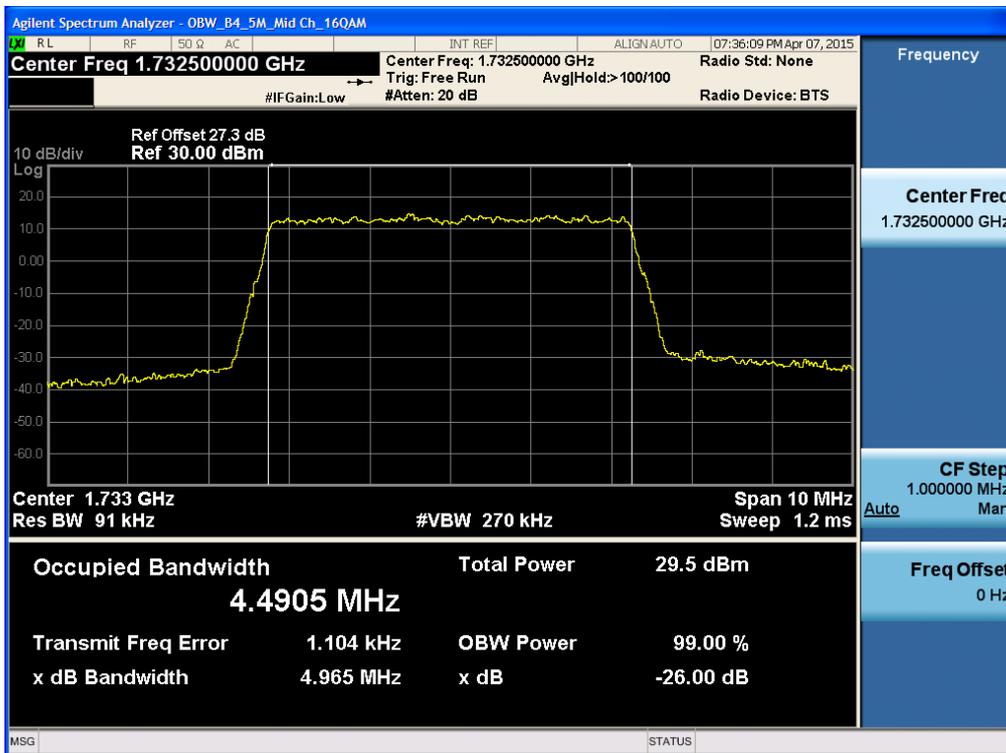


BAND 4. Occupied Bandwidth Plot (10M BW Ch.20175 QPSK RB 50)

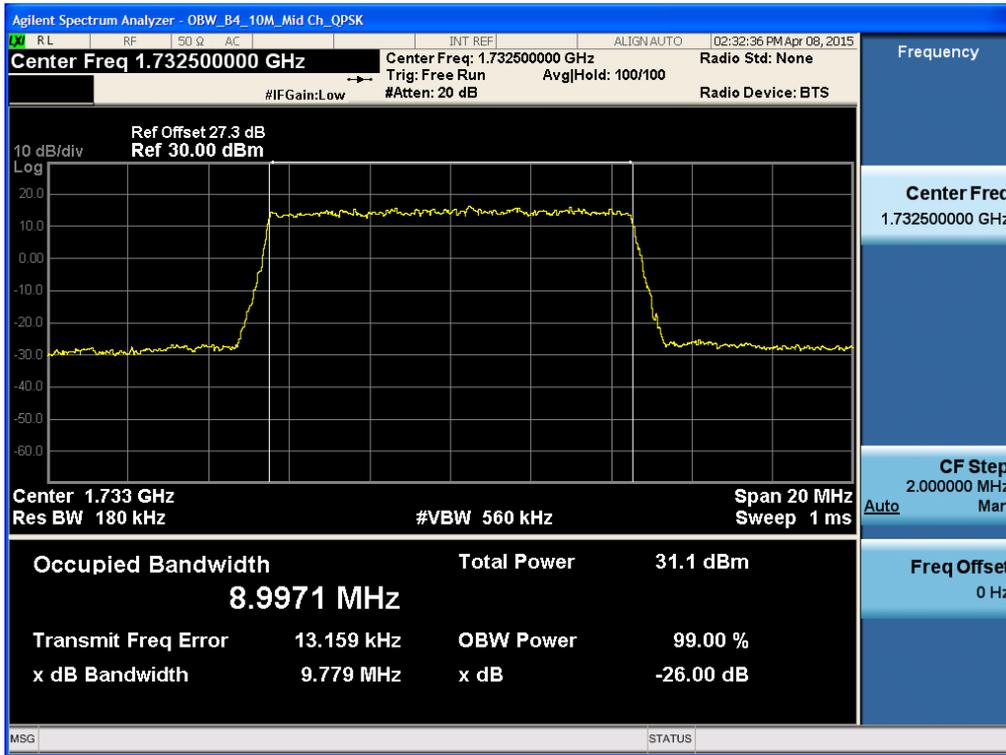


BAND 4. Occupied Bandwidth Plot (10M BW Ch.20175 16QAM RB 50)

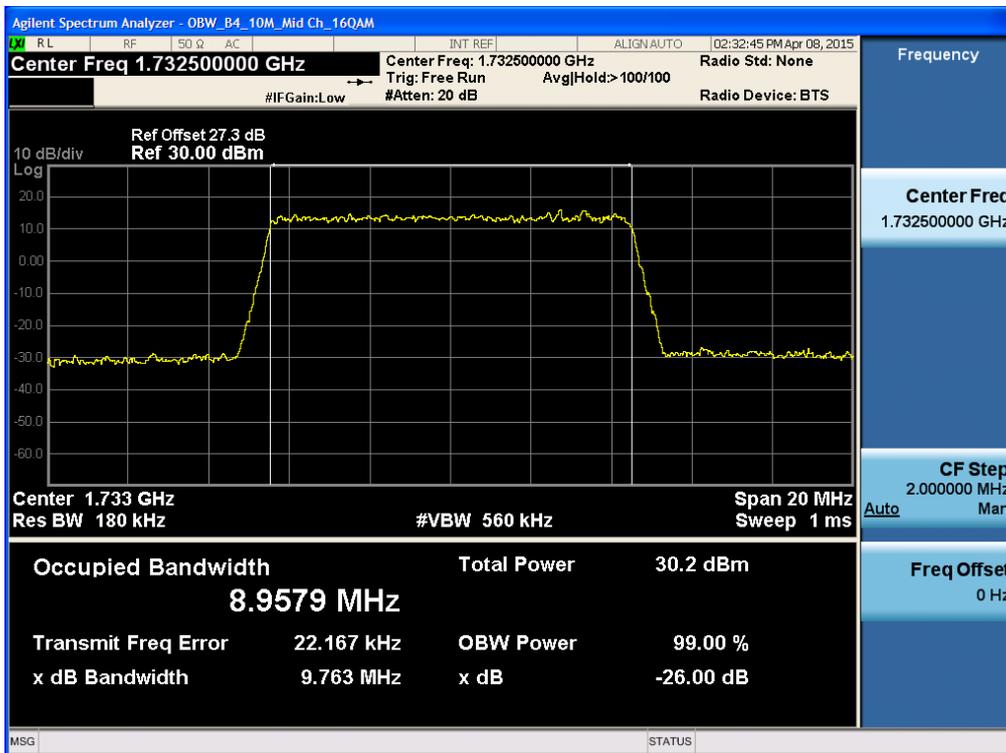


BAND 4. Occupied Bandwidth Plot (15M BW Ch.20175 QPSK RB 75)

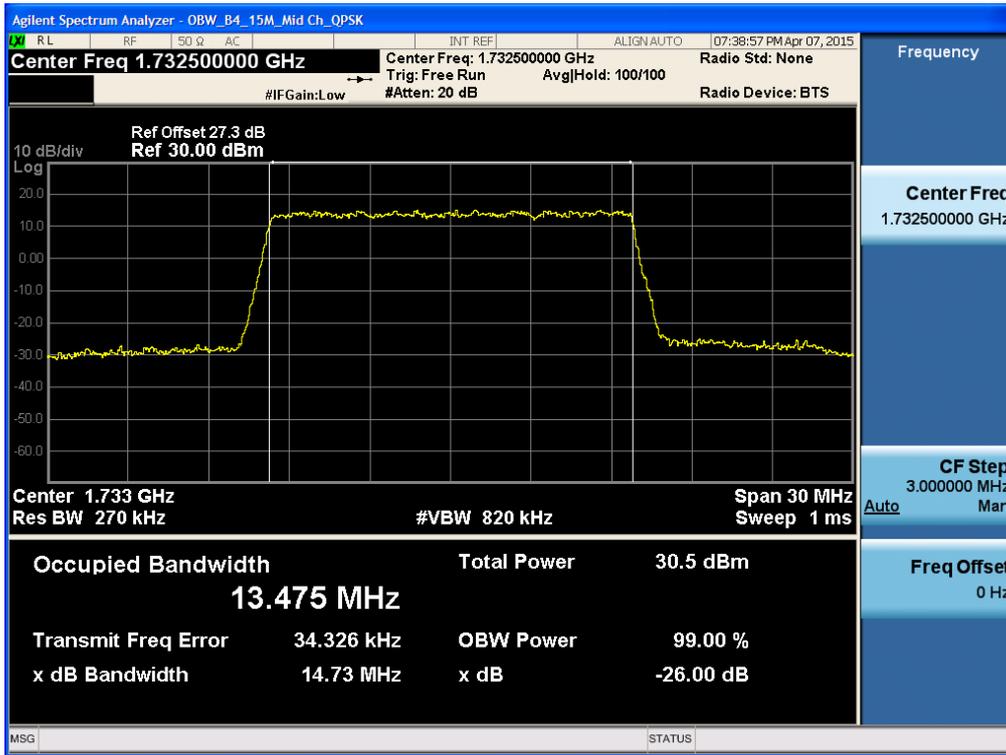


BAND 4. Occupied Bandwidth Plot (15M BW Ch.20175 16QAM RB 75)

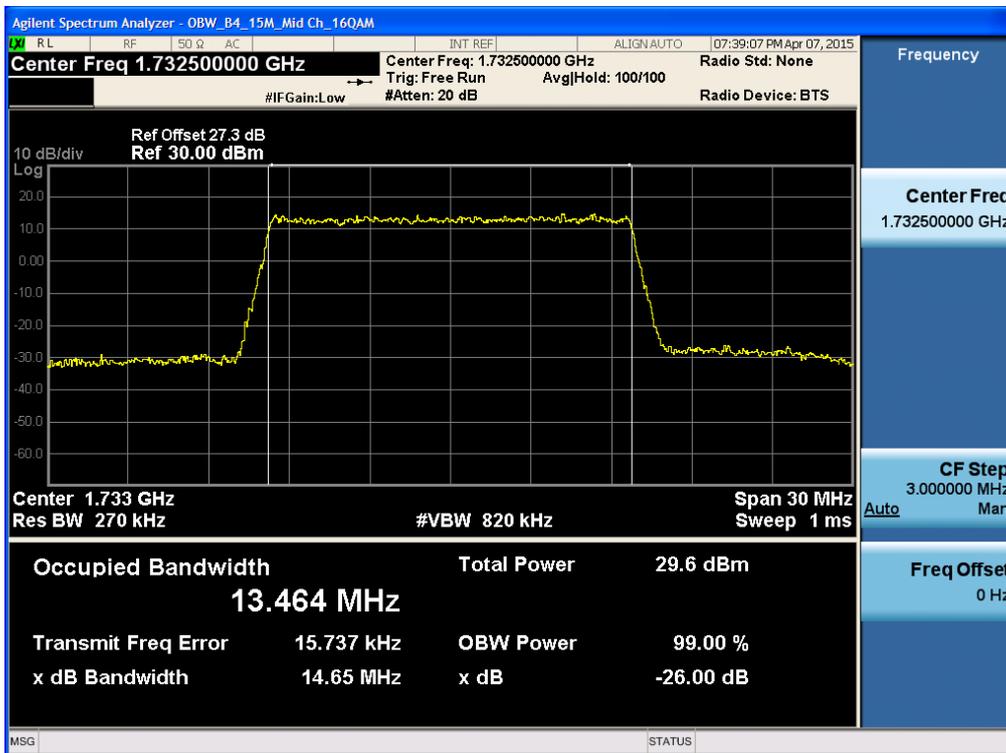


BAND 4. Occupied Bandwidth Plot (20M BW Ch.20175 QPSK RB 100)

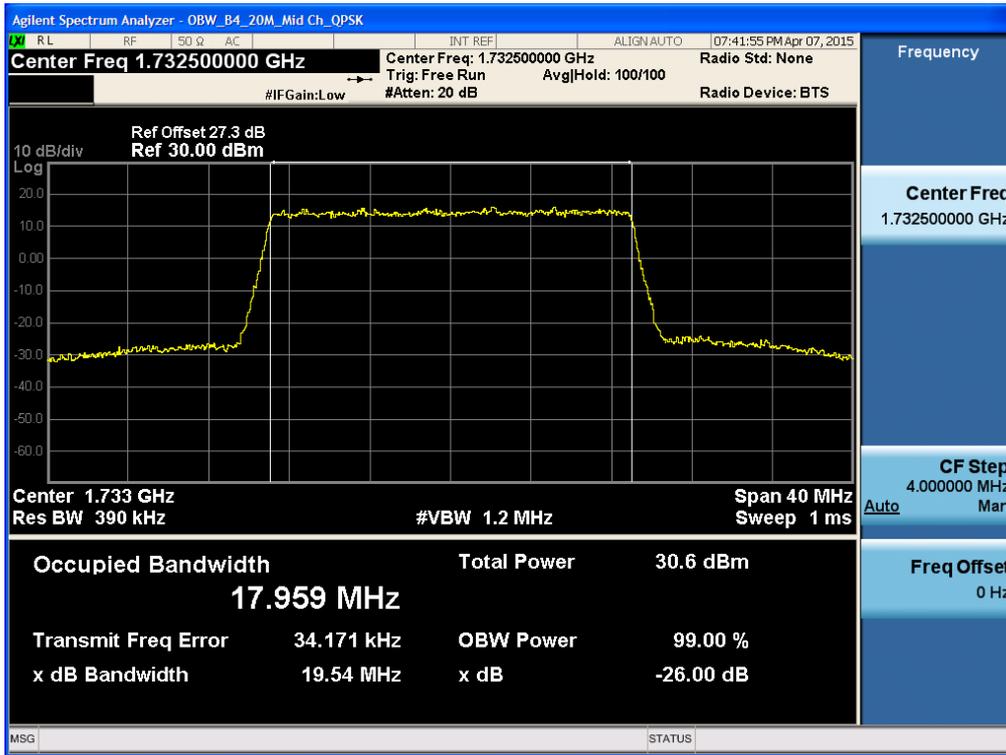


BAND 4. Occupied Bandwidth Plot (20M BW Ch.20175 16QAM RB 100)

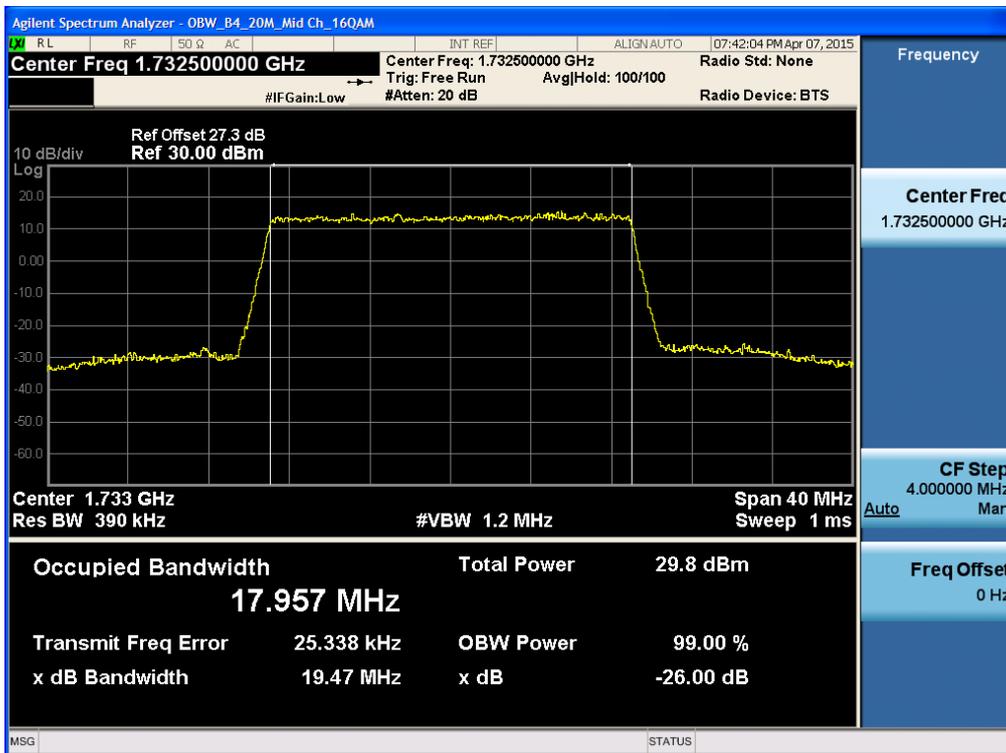


BAND 17. PAR Plot (5M BW\_Ch.23790\_QPSK\_RB25\_0)

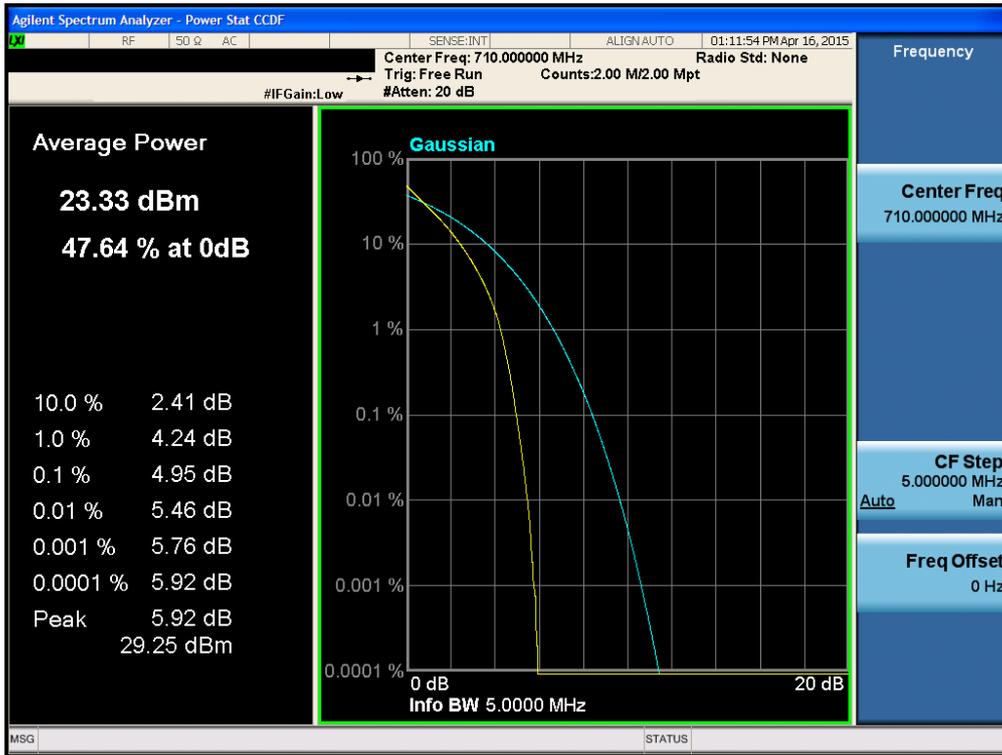


BAND 17. PAR Plot (5M BW\_Ch.23790\_16QAM\_RB25\_0)

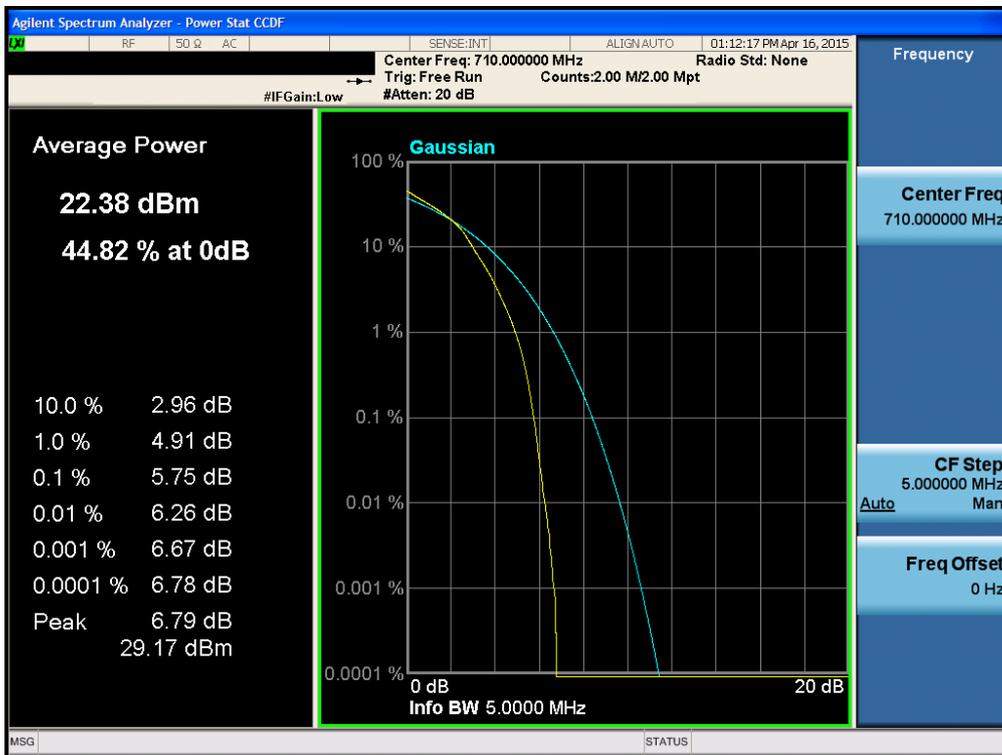


BAND 17. PAR Plot (10M BW\_Ch.23790\_QPSK\_RB50\_0)

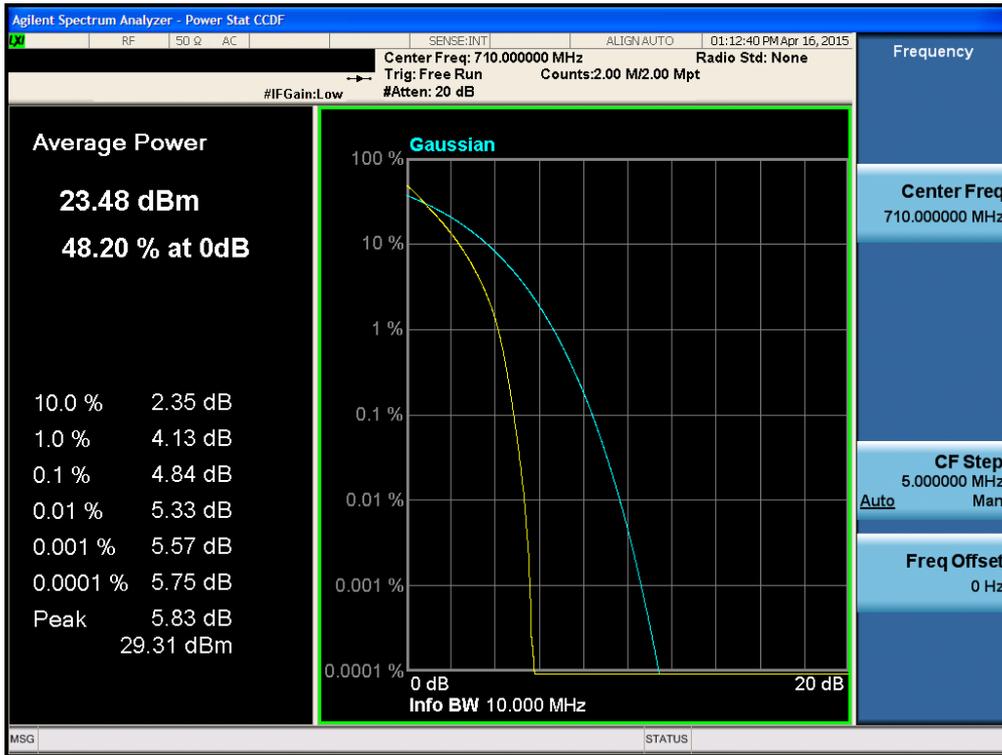

BAND 17. PAR Plot (10M BW\_Ch.23790\_16QAM\_RB50\_0)

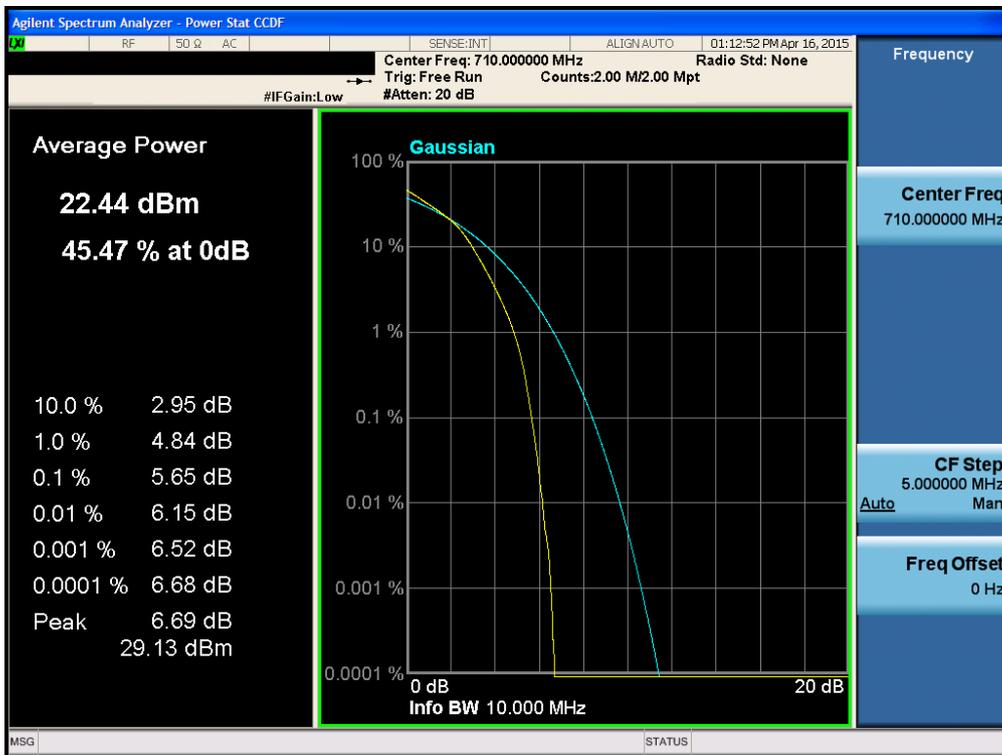


BAND 4. PAR Plot (1.4M BW\_Ch.20175\_QPSK\_RB6\_0)

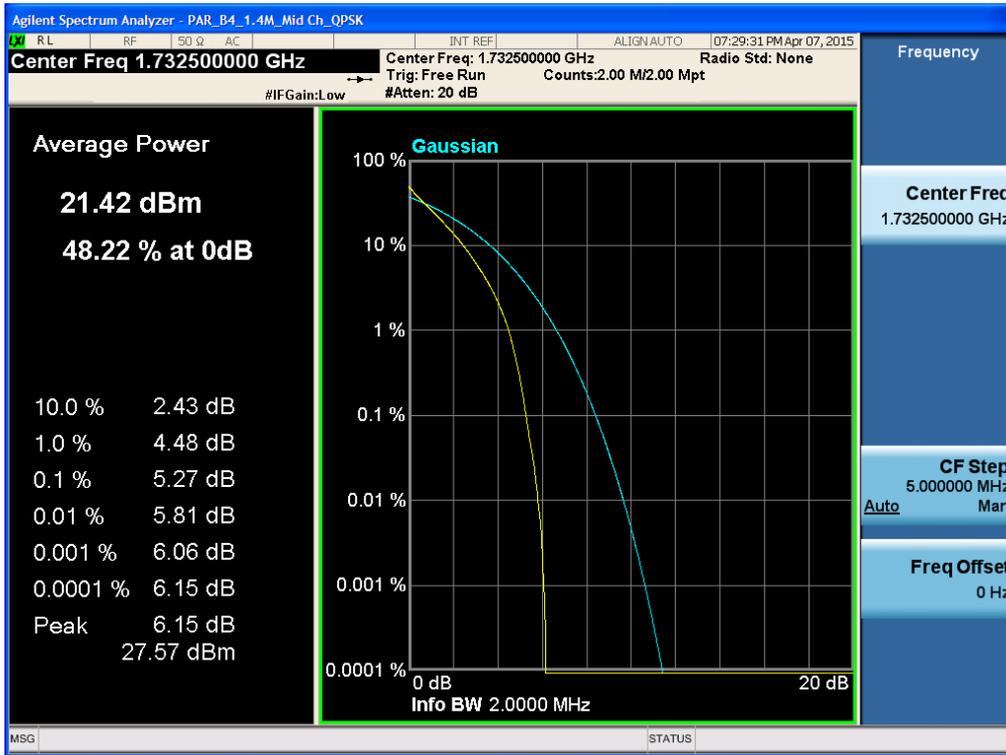

BAND 4. PAR Plot (1.4M BW\_Ch.20175\_16QAM\_RB6\_0)




BAND 4. PAR Plot (3M BW\_Ch.20175\_QPSK\_RB15\_0)

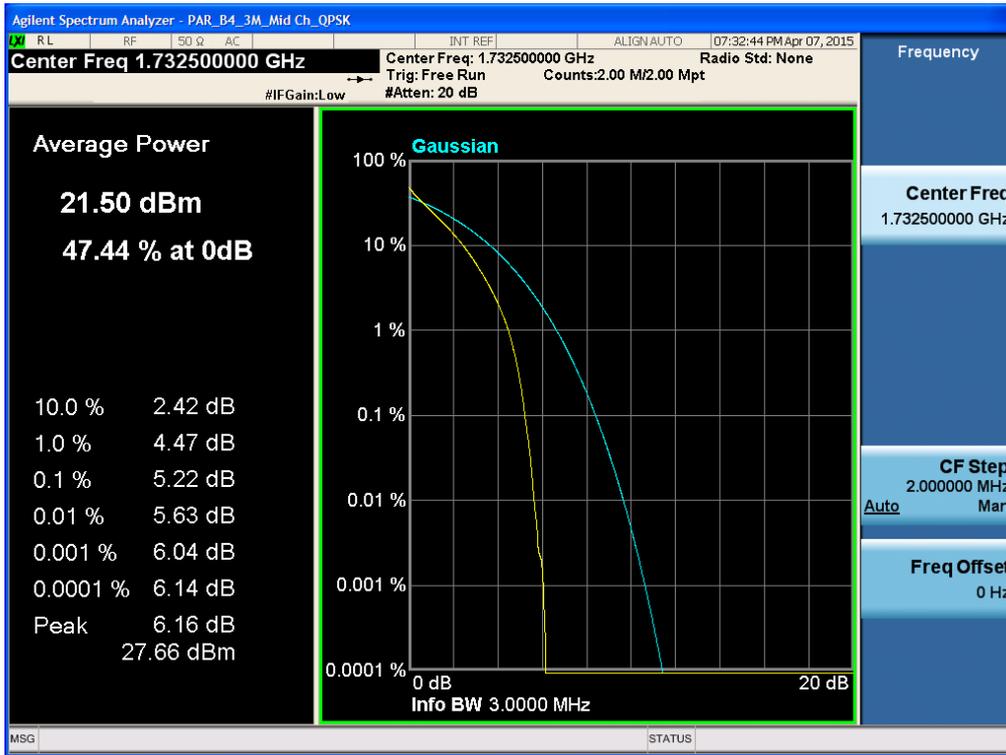

BAND 4. PAR Plot (3M BW\_Ch.20175\_16QAM\_RB15\_0)




BAND 4. PAR Plot (5M BW\_Ch.20175\_QPSK\_RB25\_0)

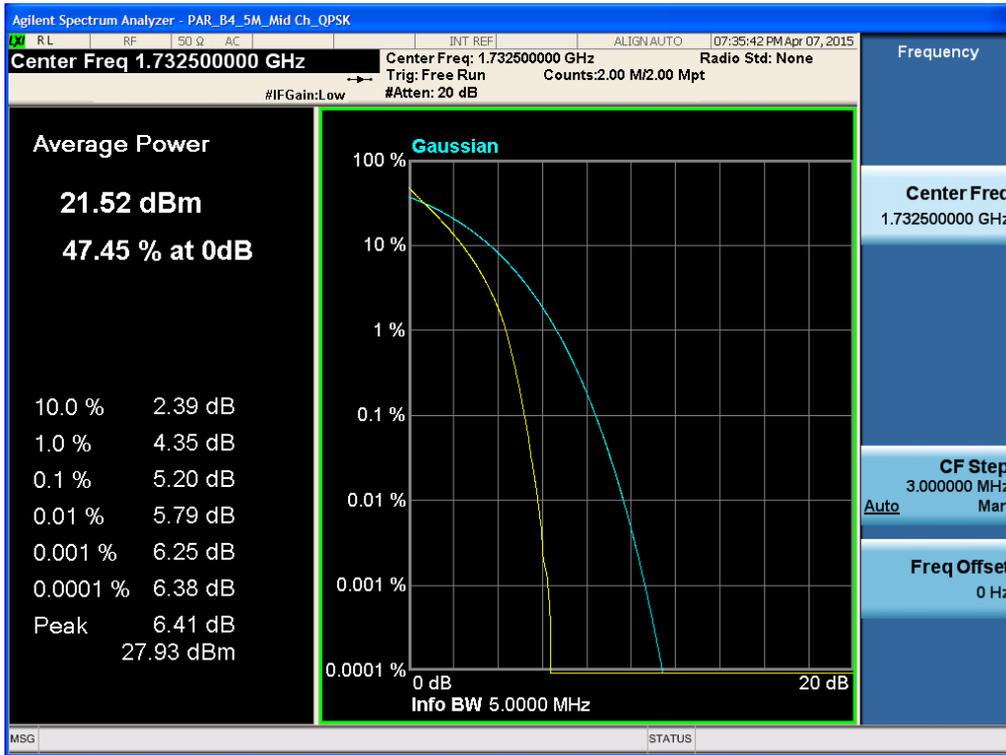

BAND 4. PAR Plot (5M BW\_Ch.20175\_16QAM\_RB25\_0)




BAND 4. PAR Plot (10M BW\_Ch.20175\_QPSK\_RB50\_0)

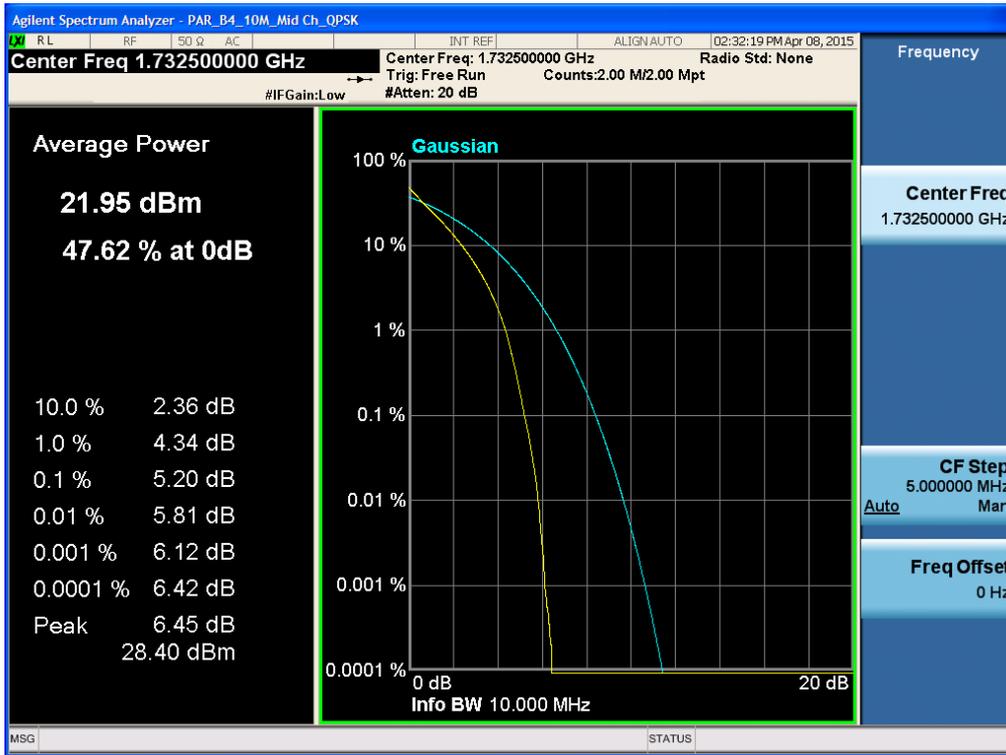

BAND 4. PAR Plot (10M BW\_Ch.20175\_16QAM\_RB50\_0)




BAND 4. PAR Plot (15M BW\_Ch.20175\_QPSK\_RB75\_0)

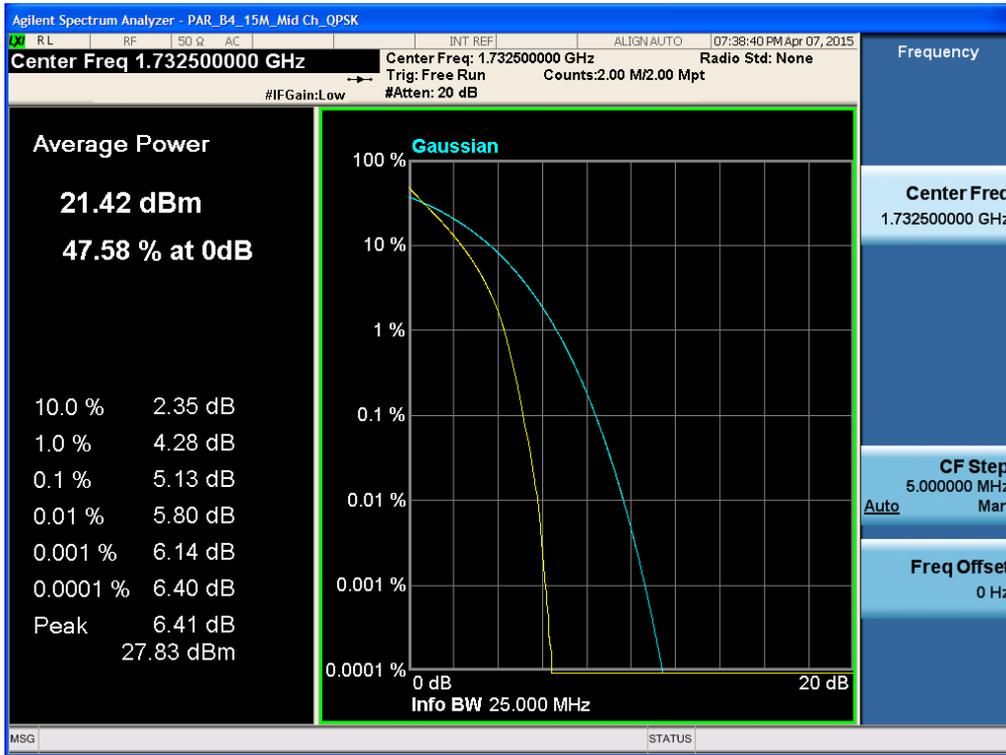

BAND 4. PAR Plot (15M BW\_Ch.20175\_16QAM\_RB75\_0)




BAND 4. PAR Plot (20M BW\_Ch.20175\_QPSK\_RB100\_0)

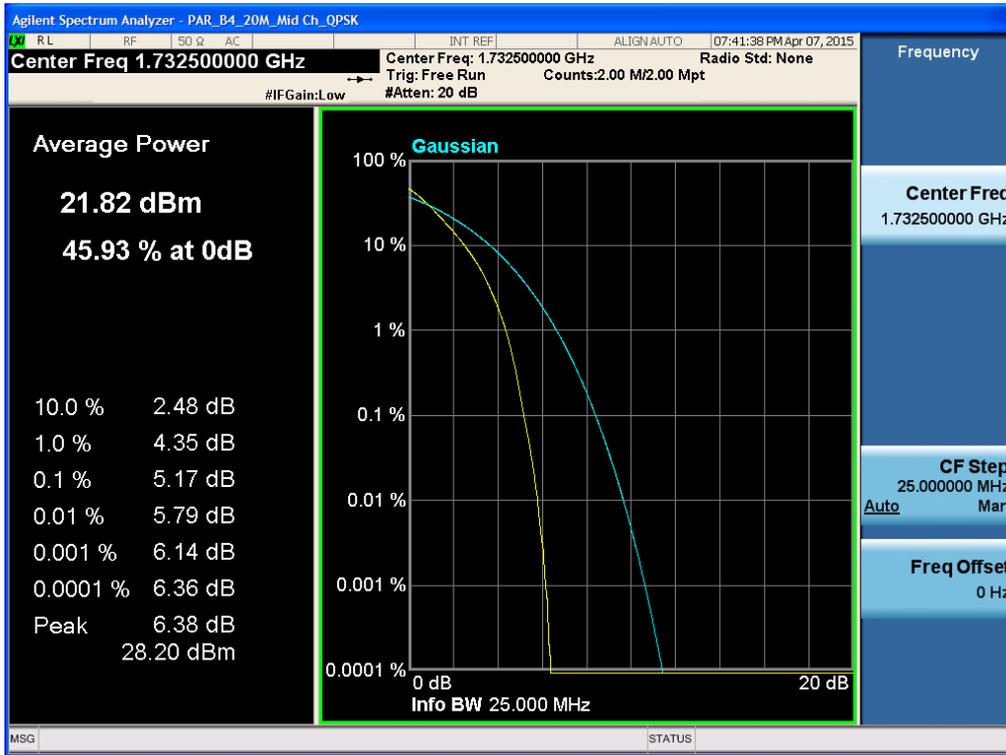

BAND 4. PAR Plot (20M BW\_Ch.20175\_16QAM\_RB100\_0)



Band 17 Lower Band Edge Plot (5M BW Ch.23755 QPSK\_RB1 OFFSET0)

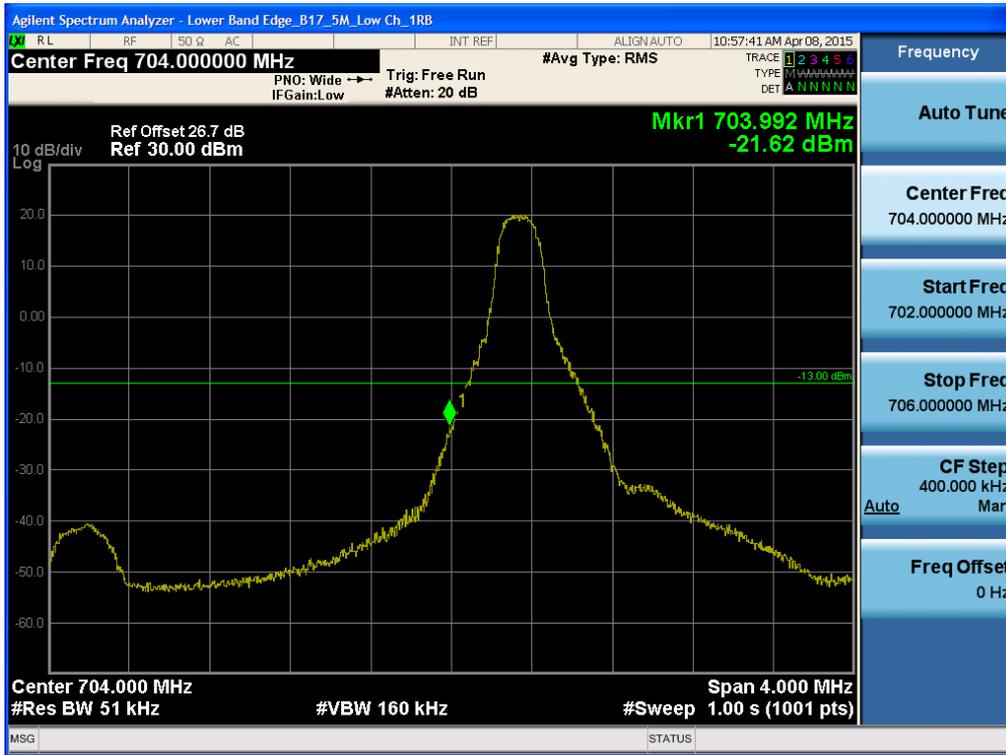


Band 17 Lower Band Edge Plot (5M BW Ch.23755 QPSK\_RB25)



Band 17 Lower Extended Band Edge Plot (5M BW Ch.23755 QPSK\_RB25\_0)




Band 17 Lower Band Edge Plot (10M BW Ch.23780 QPSK\_RB1\_49)

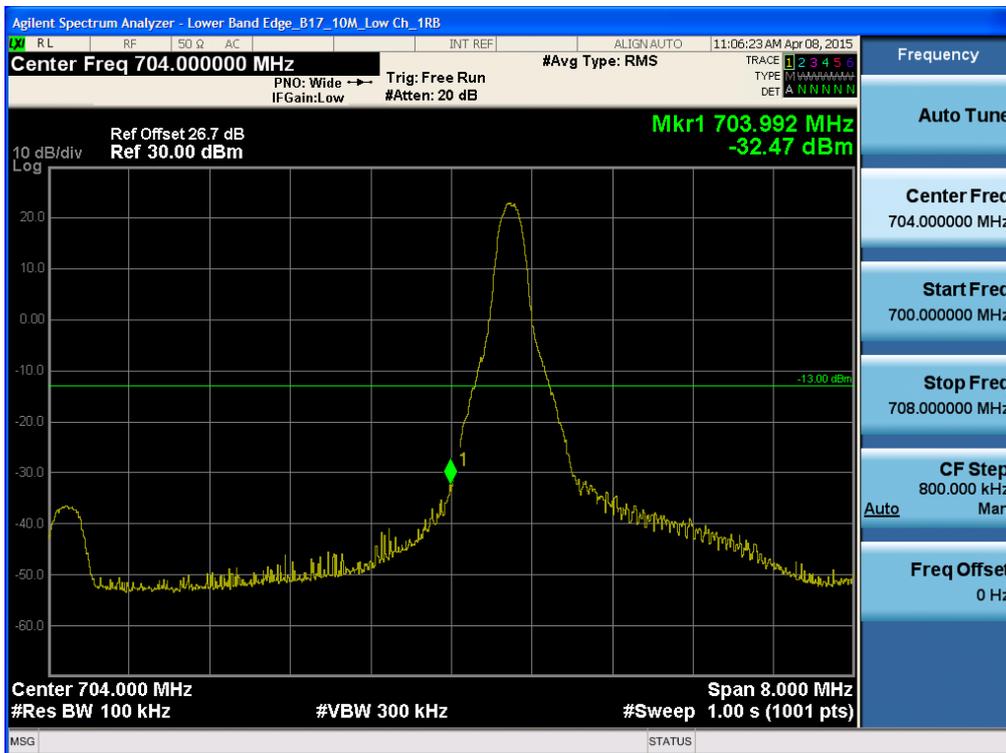


Band 17 Lower Band Edge Plot (10M BW Ch.23780 QPSK\_RB50\_0)



Band 17 Lower Extended Band Edge Plot (10M BW Ch.23780 QPSK\_RB50\_0)

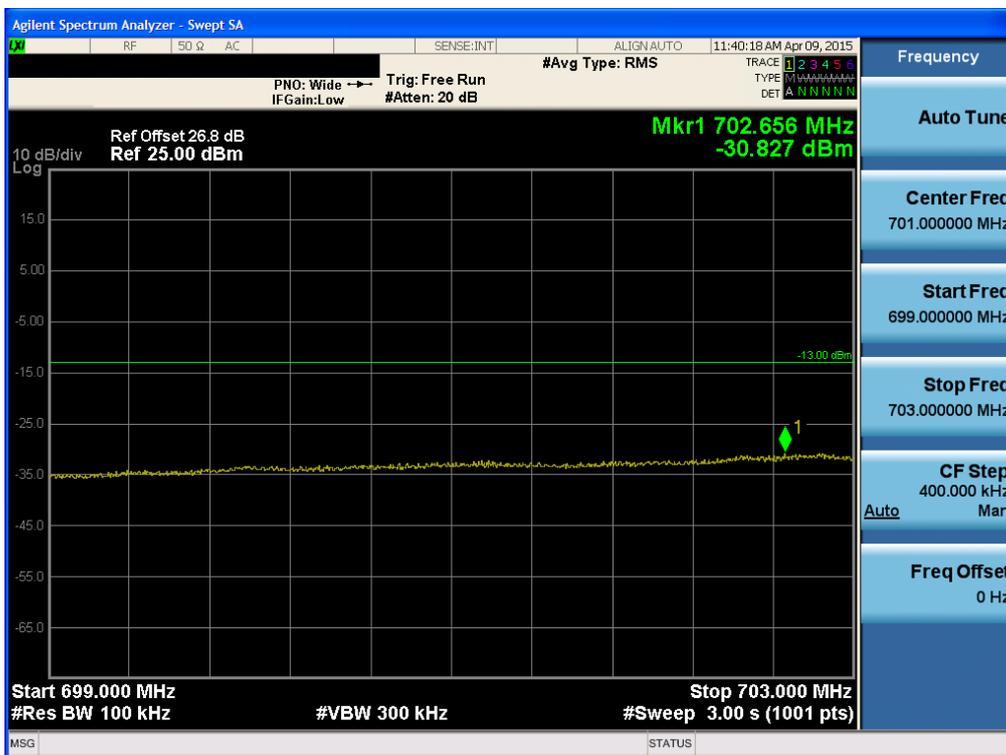

Band 17 Upper Band Edge Plot (5M BW Ch.23825 QPSK\_RB1\_Offset 24)

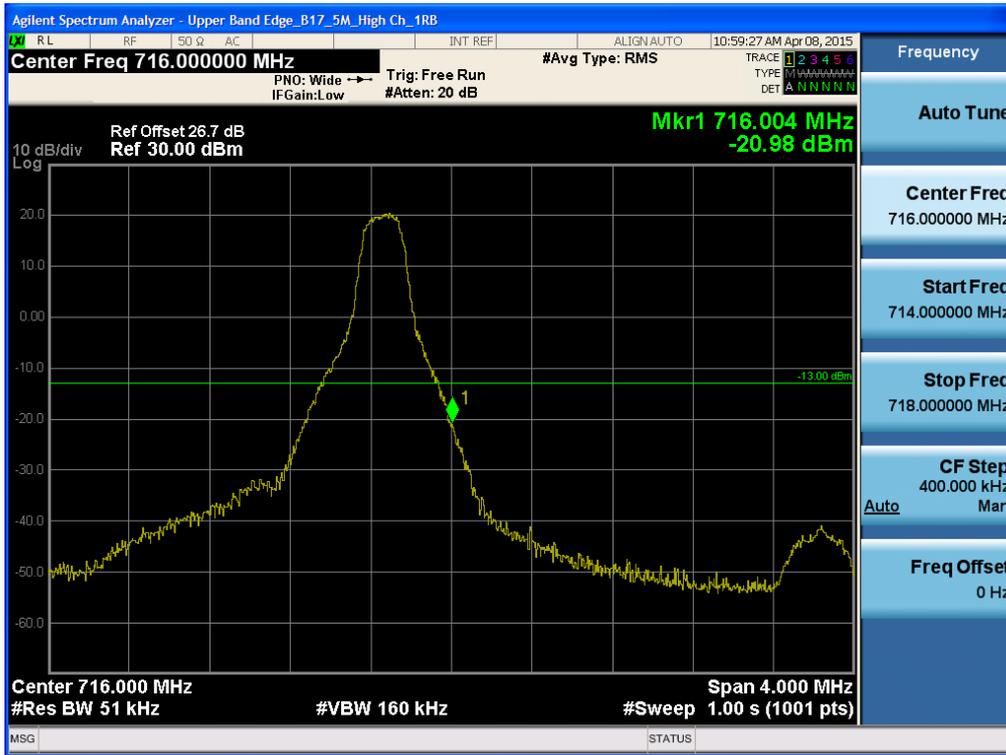

Band 17 Upper Band Edge Plot (5M BW Ch.23825 QPSK\_RB25)



Band 17 Upper Extended Band Edge Plot (5M BW Ch.23825 QPSK\_RB25\_0)



Band 17 Upper Band Edge Plot (10M BW Ch.23800 QPSK\_RB1\_Offset 49)

