

FCC LTE REPORT

FCC Certification

Applicant Name:
LG Electronics MobileComm U.S.A., Inc.

Date of Issue:
September 22, 2015

Test Site/Location:

Address:
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

Report No.: HCT-R-1509-F014-1

HCT FRN: 0005866421

FCC ID: ZNFH960

APPLICANT: LG Electronics MobileComm U.S.A., Inc.

FCC Model(s): LG-H960

Additional FCC Model(s): LGH960, H960, LG-H960P, LGH960P, H960P, LG-H960AR, LGH960AR, H960AR, LG-H960YK, LGH960YK, H960YK

EUT Type: Cellular/PCS GSM/WCDMA/LTE Phone with WLAN, Bluetooth and NFC

FCC Classification: Licensed Portable Transmitter Held to Ear (PCE)

FCC Rule Part(s): §2 , §27

Standalone with normal cover

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	ERP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band17 (5)	706.5 – 713.5	4M51G7D	QPSK	0.043	16.38
		4M50W7D	16QAM	0.037	15.64
LTE – Band17 (10)	709.0 – 711.0	8M97G7D	QPSK	0.040	16.06
		8M95W7D	16QAM	0.033	15.20

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band4 (1.4)	1710.7 – 1754.3	1M09G7D	QPSK	0.083	19.18
		1M10W7D	16QAM	0.071	18.50
LTE – Band4 (3)	1711.5 – 1753.5	2M70G7D	QPSK	0.081	19.06
		2M70W7D	16QAM	0.068	18.32
LTE – Band4 (5)	1712.5 – 1752.5	4M50G7D	QPSK	0.083	19.17
		4M50W7D	16QAM	0.071	18.48
LTE – Band4 (10)	1715.0 – 1750.0	8M99G7D	QPSK	0.085	19.30
		8M96W7D	16QAM	0.075	18.72
LTE – Band4 (15)	1717.5 – 1747.5	13M5G7D	QPSK	0.088	19.44
		13M5W7D	16QAM	0.074	18.69
LTE – Band4 (20)	1720.0 – 1745.0	18M0G7D	QPSK	0.087	19.39
		18M0W7D	16QAM	0.076	18.83

Standalone with wireless charging cover

Mode (MHz)	Tx Frequency (MHz)	Modulation	ERP	
			Max. Power (W)	Max. Power (dBm)
LTE – Band17 (5)	706.5 – 713.5	QPSK	0.049	16.88
		16QAM	0.040	16.06
LTE – Band17 (10)	709.0 – 711.0	QPSK	0.045	16.52
		16QAM	0.037	15.70

Mode (MHz)	Tx Frequency (MHz)	Modulation	EIRP	
			Max. Power (W)	Max. Power (dBm)
LTE – Band4 (1.4)	1710.7 – 1754.3	QPSK	0.079	18.96
		16QAM	0.066	18.22
LTE – Band4 (3)	1711.5 – 1753.5	QPSK	0.078	18.94
		16QAM	0.067	18.24
LTE – Band4 (5)	1712.5 – 1752.5	QPSK	0.080	19.03
		16QAM	0.069	18.38
LTE – Band4 (10)	1715.0 – 1750.0	QPSK	0.083	19.20
		16QAM	0.069	18.40
LTE – Band4 (15)	1717.5 – 1747.5	QPSK	0.085	19.30
		16QAM	0.074	18.69
LTE – Band4 (20)	1720.0 – 1745.0	QPSK	0.085	19.28
		16QAM	0.075	18.74

With wireless charging pad(WCD-110)

Mode (MHz)	Tx Frequency (MHz)	Modulation	ERP	
			Max. Power (W)	Max. Power (dBm)
LTE – Band17 (5)	706.5 – 713.5	QPSK	0.043	16.32
		16QAM	0.036	15.55
LTE – Band17 (10)	709.0 – 711.0	QPSK	0.045	16.57
		16QAM	0.038	15.74

Mode (MHz)	Tx Frequency (MHz)	Modulation	EIRP	
			Max. Power (W)	Max. Power (dBm)
LTE – Band4 (1.4)	1710.7 – 1754.3	QPSK	0.046	16.61
		16QAM	0.039	15.89
LTE – Band4 (3)	1711.5 – 1753.5	QPSK	0.046	16.60
		16QAM	0.038	15.79
LTE – Band4 (5)	1712.5 – 1752.5	QPSK	0.046	16.64
		16QAM	0.039	15.91
LTE – Band4 (10)	1715.0 – 1750.0	QPSK	0.046	16.63
		16QAM	0.040	15.97
LTE – Band4 (15)	1717.5 – 1747.5	QPSK	0.047	16.76
		16QAM	0.039	15.93
LTE – Band4 (20)	1720.0 – 1745.0	QPSK	0.048	16.85
		16QAM	0.040	16.05

With wireless charging pad(CT 06801)

Mode (MHz)	Tx Frequency (MHz)	Modulation	ERP	
			Max. Power (W)	Max. Power (dBm)
LTE – Band17 (5)	706.5 – 713.5	QPSK	0.035	15.42
		16QAM	0.029	14.64
LTE – Band17 (10)	709.0 – 711.0	QPSK	0.030	14.75
		16QAM	0.026	14.13

Mode (MHz)	Tx Frequency (MHz)	Modulation	EIRP	
			Max. Power (W)	Max. Power (dBm)
LTE – Band4 (1.4)	1710.7 – 1754.3	QPSK	0.064	18.09
		16QAM	0.053	17.22
LTE – Band4 (3)	1711.5 – 1753.5	QPSK	0.064	18.06
		16QAM	0.053	17.23
LTE – Band4 (5)	1712.5 – 1752.5	QPSK	0.068	18.33
		16QAM	0.056	17.47
LTE – Band4 (10)	1715.0 – 1750.0	QPSK	0.067	18.23
		16QAM	0.059	17.69
LTE – Band4 (15)	1717.5 – 1747.5	QPSK	0.069	18.39
		16QAM	0.058	17.65
LTE – Band4 (20)	1720.0 – 1745.0	QPSK	0.068	18.33
		16QAM	0.059	17.69

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)



Report prepared by
: Jeong Ho Kim
Test engineer of RF Team



Approved by
: Sang Jun Lee
Manager of RF Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-R-1509-F014	September 08, 2015	- First Approval Report
HCT-R-1509-F014-1	September 22, 2015	-Revised Typographical errors

Table of Contents

1. GENERAL INFORMATION	7
2. INTRODUCTION	9
2.1. EUT DESCRIPTION.....	9
2.2. MEASURING INSTRUMENT CALIBRATION	9
2.3. TEST FACILITY	9
3. DESCRIPTION OF TESTS.....	10
3.1 ERP/EIRP RADIATED POWER AND RADIATED SPURIOUS EMISSIONS.....	10
3.2 BLOCK B FREQUENCY RANGE (704 – 710 and 734 – 740 MHz, 777 – 792 MHz).....	11
3.3 AWS – MOBILE FREQUENCY BLOCKS (1710 – 1755 MHz).....	11
3.4 PEAK-AVERAGE RATIO.	12
3.5 OCCUPIED BANDWIDTH.	14
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	15
3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	16
4. LIST OF TEST EQUIPMENT	17
5. SUMMARY OF TEST RESULTS	18
6. SAMPLE CALCULATION	19
7. TEST DATA	20
7.1 EFFECTIVE RADIATED POWER (Band 17)_Standalone with normal cover.....	20
7.2 EQUIVALENT ISOTROPIC RADIATED POWER (Band 4)_Standalone with normal cover	22
7.3 EFFECTIVE RADIATED POWER (Band 17)_Standalone with wireless charging cover	26
7.4 EQUIVALENT ISOTROPIC RADIATED POWER (Band 4)_Standalone with wireless charging cover	28
7.5 EFFECTIVE RADIATED POWER (Band 17)_With wireless charging pad(WCD-110).....	32
7.6 EQUIVALENT ISOTROPIC RADIATED POWER (Band 4)_With wireless charging pad(WCD-110).....	34
7.7 EFFECTIVE RADIATED POWER (Band 17)_With wireless charging pad(CT 06801).....	38
7.8 EQUIVALENT ISOTROPIC RADIATED POWER (Band 4)_With wireless charging pad(CT 06801).....	40
7.9 RADIATED SPURIOUS EMISSIONS_Standalone with normal cover	44
7.9.1 RADIATED SPURIOUS EMISSIONS (5 MHz Band 17 LTE).....	44
7.9.2 RADIATED SPURIOUS EMISSIONS (10 MHz Band 17 LTE).....	45
7.9.3 RADIATED SPURIOUS EMISSIONS (1.4 MHz Band 4 LTE).....	46
7.9.4 RADIATED SPURIOUS EMISSIONS (3 MHz Band 4 LTE).....	47
7.9.5 RADIATED SPURIOUS EMISSIONS (5 MHz Band 4 LTE).....	48
7.9.6 RADIATED SPURIOUS EMISSIONS (10 MHz Band 4 LTE).....	49
7.9.7 RADIATED SPURIOUS EMISSIONS (15 MHz Band 4 LTE).....	50
7.9.8 RADIATED SPURIOUS EMISSIONS (20 MHz Band 4 LTE).....	51
7.10 RADIATED SPURIOUS EMISSIONS_Standalone with wireless charging cover	52
7.10.1 RADIATED SPURIOUS EMISSIONS (5 MHz Band 17 LTE).....	52
7.10.2 RADIATED SPURIOUS EMISSIONS (10 MHz Band 17 LTE).....	53
7.10.3 RADIATED SPURIOUS EMISSIONS (1.4 MHz Band 4 LTE).....	54
7.10.4 RADIATED SPURIOUS EMISSIONS (3 MHz Band 4 LTE).....	55
7.10.5 RADIATED SPURIOUS EMISSIONS (5 MHz Band 4 LTE).....	56
7.10.6 RADIATED SPURIOUS EMISSIONS (10 MHz Band 4 LTE).....	57

7.10.7 RADIATED SPURIOUS EMISSIONS (15 MHz Band 4 LTE).....	58
7.10.8 RADIATED SPURIOUS EMISSIONS (20 MHz Band 4 LTE).....	59
7.11 RADIATED SPURIOUS EMISSIONS_With wireless charging pad(WCD-110).....	60
7.11.1 RADIATED SPURIOUS EMISSIONS (5 MHz Band 17 LTE).....	60
7.11.2 RADIATED SPURIOUS EMISSIONS (10 MHz Band 17 LTE).....	61
7.11.3 RADIATED SPURIOUS EMISSIONS (1.4 MHz Band 4 LTE).....	62
7.11.4 RADIATED SPURIOUS EMISSIONS (3 MHz Band 4 LTE).....	63
7.11.5 RADIATED SPURIOUS EMISSIONS (5 MHz Band 4 LTE).....	64
7.11.6 RADIATED SPURIOUS EMISSIONS (10 MHz Band 4 LTE).....	65
7.11.7 RADIATED SPURIOUS EMISSIONS (15 MHz Band 4 LTE).....	66
7.11.8 RADIATED SPURIOUS EMISSIONS (20 MHz Band 4 LTE).....	67
7.12 RADIATED SPURIOUS EMISSIONS_With wireless charging pad(CT 06801).....	68
7.12.1 RADIATED SPURIOUS EMISSIONS (5 MHz Band 17 LTE).....	68
7.12.2 RADIATED SPURIOUS EMISSIONS (10 MHz Band 17 LTE).....	69
7.12.3 RADIATED SPURIOUS EMISSIONS (1.4 MHz Band 4 LTE).....	70
7.12.4 RADIATED SPURIOUS EMISSIONS (3 MHz Band 4 LTE).....	71
7.12.5 RADIATED SPURIOUS EMISSIONS (5 MHz Band 4 LTE).....	72
7.12.6 RADIATED SPURIOUS EMISSIONS (10 MHz Band 4 LTE).....	73
7.12.7 RADIATED SPURIOUS EMISSIONS (15 MHz Band 4 LTE).....	74
7.12.8 RADIATED SPURIOUS EMISSIONS (20 MHz Band 4 LTE).....	75
7.13 PEAK-TO-AVERAGE RATIO	76
7.14 OCCUPIED BANDWIDTH	77
7.15 CONDUCTED SPURIOUS EMISSIONS.....	78
7.15.1 BAND EDGE.....	79
7.16 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	80
7.16.1 FREQUENCY STABILITY (5 MHz Band 17 LTE).....	80
7.16.2 FREQUENCY STABILITY (10 MHz Band 17 LTE).....	81
7.16.3 FREQUENCY STABILITY (1.4 MHz Band 4 LTE).....	82
7.16.4 FREQUENCY STABILITY (3 MHz Band 4 LTE).....	83
7.16.5 FREQUENCY STABILITY (5 MHz Band 4 LTE).....	84
7.16.6 FREQUENCY STABILITY (10 MHz Band 4 LTE).....	85
7.16.7 FREQUENCY STABILITY (15 MHz Band 4 LTE).....	86
7.16.8 FREQUENCY STABILITY (20 MHz Band 4 LTE).....	87
8. TEST PLOTS.....	88

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name: LG Electronics MobileComm U.S.A., Inc.

Address: 1000 Sylvan Avenue, Englewood Cliffs NJ 07632

FCC ID: ZNFH960

Application Type: Certification

FCC Classification: Licensed Portable Transmitter Held to Ear (PCE)

FCC Rule Part(s): §2 , §27

EUT Type: Cellular/PCS GSM/WCDMA/LTE Phone with WLAN, Bluetooth and NFC

FCC Model(s): LG-H960

Additional FCC Model(s): LGH960, H960, LG-H960P, LGH960P, H960P, LG-H960AR, LGH960AR, H960AR, LG-H960YK, LGH960YK, H960YK

Tx Frequency: 706.5 MHz – 713.5 MHz (LTE – Band 17 (5 MHz))
709.0 MHz – 711.0 MHz (LTE – Band 17 (10 MHz))

1710.7 MHz – 1754.3 MHz (LTE – Band 4 (1.4 MHz))
1711.5 MHz – 1753.5 MHz (LTE – Band 4 (3 MHz))
1712.5 MHz – 1752.5 MHz (LTE – Band 4 (5 MHz))
1715.0 MHz – 1750.0 MHz (LTE – Band 4 (10 MHz))
1717.5 MHz – 1747.5 MHz (LTE – Band 4 (15 MHz))
1720.0 MHz – 1745.0 MHz (LTE – Band 4 (20 MHz))

Max. RF Output Power:

Standalone with normal cover

Band 17 (5 MHz) :	0.043 W (QPSK) (16.38 dBm)
	0.037 W (16-QAM) (15.64 dBm)
Band 17 (10 MHz) :	0.040 W (QPSK) (16.06 dBm)
	0.033 W (16-QAM) (15.20 dBm)
Band 4 (1.4 MHz):	0.083 W (QPSK) (19.18 dBm)
	0.071 W (16-QAM) (18.50 dBm)
Band 4 (3 MHz):	0.081 W (QPSK) (19.06 dBm)
	0.068 W (16-QAM) (18.32 dBm)
Band 4 (5 MHz):	0.083 W (QPSK) (19.17 dBm)
	0.071 W (16-QAM) (18.48 dBm)
Band 4 (10 MHz):	0.085 W (QPSK) (19.30 dBm)
	0.075 W (16-QAM) (18.72 dBm)
Band 4 (15 MHz):	0.088 W (QPSK) (19.44 dBm)
	0.074 W (16-QAM) (18.69 dBm)
Band 4 (20 MHz):	0.087 W (QPSK) (19.39 dBm)
	0.076 W (16-QAM) (18.83 dBm)

Standalone with wireless charging cover

Band 17 (5 MHz) :	0.049 W (QPSK) (16.88 dBm)
	0.040 W (16-QAM) (16.06 dBm)
Band 17 (10 MHz) :	0.045 W (QPSK) (16.52 dBm)
	0.037 W (16-QAM) (15.70 dBm)

Band 4 (1.4 MHz):	0.079 W (QPSK) (18.96 dBm) 0.066 W (16-QAM) (18.22 dBm)
Band 4 (3 MHz):	0.078 W (QPSK) (18.94 dBm) 0.067 W (16-QAM) (18.24 dBm)
Band 4 (5 MHz):	0.080 W (QPSK) (19.03 dBm) 0.069 W (16-QAM) (18.38 dBm)
Band 4 (10 MHz):	0.083 W (QPSK) (19.20 dBm) 0.069 W (16-QAM) (18.40 dBm)
Band 4 (15 MHz):	0.085 W (QPSK) (19.30 dBm) 0.074 W (16-QAM) (18.69 dBm)
Band 4 (20 MHz):	0.085 W (QPSK) (19.28 dBm) 0.075 W (16-QAM) (18.74 dBm)

With wireless charging pad(WCD-110)

Band 17 (5 MHz) :	0.043 W (QPSK) (16.32 dBm) 0.036 W (16-QAM) (15.55 dBm)
Band 17 (10 MHz) :	0.045 W (QPSK) (16.57 dBm) 0.038 W (16-QAM) (15.74 dBm)
Band 4 (1.4 MHz):	0.046 W (QPSK) (16.61 dBm) 0.039 W (16-QAM) (15.89 dBm)
Band 4 (3 MHz):	0.046 W (QPSK) (16.60 dBm) 0.038 W (16-QAM) (15.79 dBm)
Band 4 (5 MHz):	0.046 W (QPSK) (16.64 dBm) 0.039 W (16-QAM) (15.91 dBm)
Band 4 (10 MHz):	0.046 W (QPSK) (16.63 dBm) 0.040 W (16-QAM) (15.97 dBm)
Band 4 (15 MHz):	0.047 W (QPSK) (16.76 dBm) 0.039 W (16-QAM) (15.93 dBm)
Band 4 (20 MHz):	0.048 W (QPSK) (16.85 dBm) 0.040 W (16-QAM) (16.05 dBm)

With wireless charging pad(CT 06801)

Band 17 (5 MHz) :	0.035 W (QPSK) (15.42 dBm) 0.029 W (16-QAM) (14.64 dBm)
Band 17 (10 MHz) :	0.030 W (QPSK) (14.75 dBm) 0.026 W (16-QAM) (14.13 dBm)
Band 4 (1.4 MHz):	0.064 W (QPSK) (18.09 dBm) 0.053 W (16-QAM) (17.22 dBm)
Band 4 (3 MHz):	0.064 W (QPSK) (18.06 dBm) 0.053 W (16-QAM) (17.23 dBm)
Band 4 (5 MHz):	0.068 W (QPSK) (18.33 dBm) 0.056 W (16-QAM) (17.47 dBm)
Band 4 (10 MHz):	0.067 W (QPSK) (18.23 dBm) 0.059 W (16-QAM) (17.69 dBm)
Band 4 (15 MHz):	0.069 W (QPSK) (18.39 dBm) 0.058 W (16-QAM) (17.65 dBm)
Band 4 (20 MHz):	0.068 W (QPSK) (18.33 dBm) 0.059 W (16-QAM) (17.69 dBm)

Emission Designator(s):	Band 17 (5 MHz) :	4M51G7D (QPSK) / 4M50W7D (16-QAM)
	Band 17 (10 MHz) :	8M97G7D (QPSK) / 8M95W7D (16-QAM)
	Band 4 (1.4 MHz):	1M09G7D (QPSK) / 1M10W7D (16-QAM)
	Band 4 (3 MHz):	2M70G7D (QPSK) / 2M70W7D (16-QAM)
	Band 4 (5 MHz):	4M50G7D (QPSK) / 4M50W7D (16-QAM)
	Band 4 (10 MHz):	8M99G7D (QPSK) / 8M96W7D (16-QAM)
	Band 4 (15 MHz):	13M5G7D (QPSK) / 13M5W7D (16-QAM)
	Band 4 (20 MHz):	18M0G7D (QPSK) / 18M0W7D (16-QAM)

Date(s) of Tests: July 29, 2015 ~ September 01, 2015

Antenna Specification	Manufacturer:	LS Mtron Co., Ltd.
	Antenna type:	PIFA Antenna (Planar Inverted F)
	Peak Gain:	Band 17: -3.55dBi
	Peak Gain:	Band 4: -2.45dBi

2. INTRODUCTION

2.1. EUT DESCRIPTION

The LG Electronics MobileComm U.S.A., Inc.LG-H960Cellular/PCS GSM/WCDMA/LTE Phone with WLAN, Bluetooth and NFC consists ofLTE 4 and 17.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 ERP/EIRP RADIATED POWER AND RADIATED SPURIOUS EMISSIONS

Note: ERP(Effective Radiated Power), EIRP(Effective Isotropic Radiated Power)

Test Procedure

Radiated emission measurements are performed in the Fully-anechoic chamber. The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-D-2010 Clause 2.2.17. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission. The level and position of the maximized emission is recorded with the spectrum analyzer using a RMS detector.

A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(dBm)} = P_{g(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

The maximum EIRP is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

Radiated spurious emissions

: Frequency Range : 30 MHz ~ 10th Harmonics of highest channel fundamental frequency.

3.2 BLOCK B FREQUENCY RANGE (704 – 710 and 734 – 740 MHz, 777 – 792 MHz)

§27.5(c)

698-746 MHz Band. The following frequencies are available for licensing pursuant to this part in the 698–746 MHz band: (1) Three paired channel blocks of 12 MHz each are available for assignment as follows :

Block A : 698 – 704 MHz and 728 – 734 MHz ;


Block B : 704 – 710 MHz and 734 – 740 MHz ; and

Block C : 710 – 716 MHz and 740 – 746 MHz.

The EUT is only being authorized for operation in Blocks B and C.

3.3 AWS – MOBILE FREQUENCY BLOCKS (1710 – 1755 MHz)

§27.5(h)

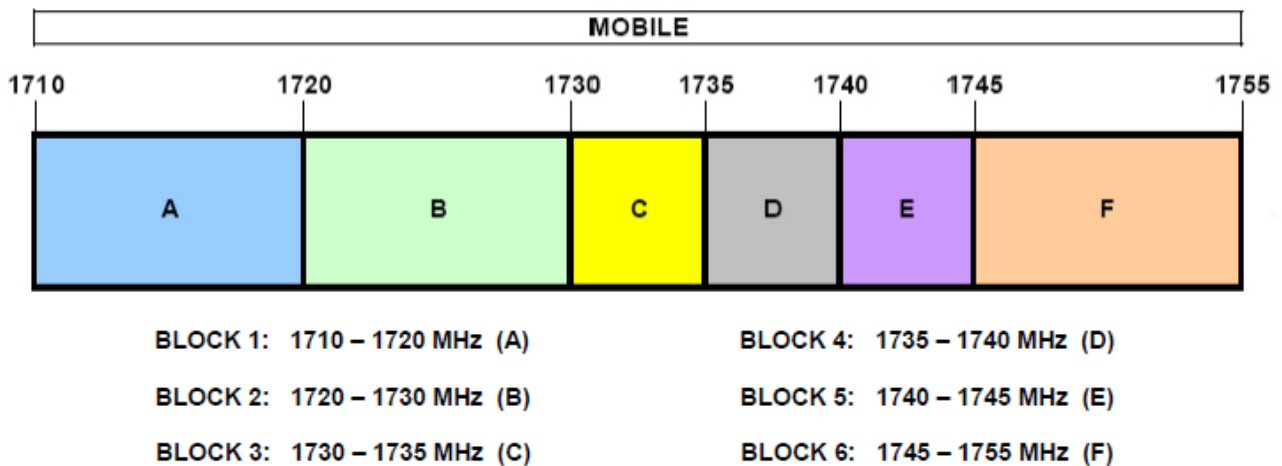

3.4 PEAK-AVERAGE RATIO.

Test Procedure

Peak to Average Power Ratio is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r02, October 17, 2014, Section 5.7.

- Section 5.7.1 CCDF Procedure

- a) Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
- b) Set the number of counts to a value that stabilizes the measured CCDF curve;
- c) Set the measurement interval as follows:
 - 1) for continuous transmissions, set to 1 ms,
 - 2) for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
- d) Record the maximum PAPR level associated with a probability of 0.1%.

- Section 5.7.2 Alternate Procedure

Use one of the procedures presented in 5.1 to measure the total peak power and record as P_{Pk} . Use one of the applicable procedures presented 5.2 to measure the total average power and record as P_{Avg} . Determine the P.A.R. from: $P.A.R_{(dB)} = P_{Pk(dBm)} - P_{Avg(dBm)}$ (P_{Avg} = Average Power + Duty cycle Factor)

5.1.1 Peak power measurements with a spectrum/signal analyzer or EMI receiver

The following procedure can be used to determine the total peak output power.

- a) Set the RBW $\geq$ OBW.
- b) Set VBW $\geq 3 \times$ RBW.
- c) Set span $\geq 2 \times$ RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Ensure that the number of measurement points $\geq$ span/RBW.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the peak amplitude level.

5.2.2 Procedures for use with a spectrum/signal analyzer when EUT cannot be configured to transmit continuously and sweep triggering/signal gating cannot be properly implemented

If the EUT cannot be configured to transmit continuously (burst duty cycle < 98%), then one of the following procedures can be used. The selection of the applicable procedure will depend on the characteristics of the measured burst duty cycle.

Measure the burst duty cycle with a spectrum/signal analyzer or EMC receiver can be used in zero-span mode if the response time and spacing between bins on the sweep are sufficient to permit accurate measurement of the burst on/off time of the transmitted signal.

5.2.2.2 Constant burst duty cycle


If the measured burst duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent), then:

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (power averaging).
- g) Set sweep trigger to "free run".
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
- j) Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission).

For example, add $10 \log (1/0.25) = 6$ dB if the duty cycle is a constant 25%.

3.5 OCCUPIED BANDWIDTH.

Test set-up

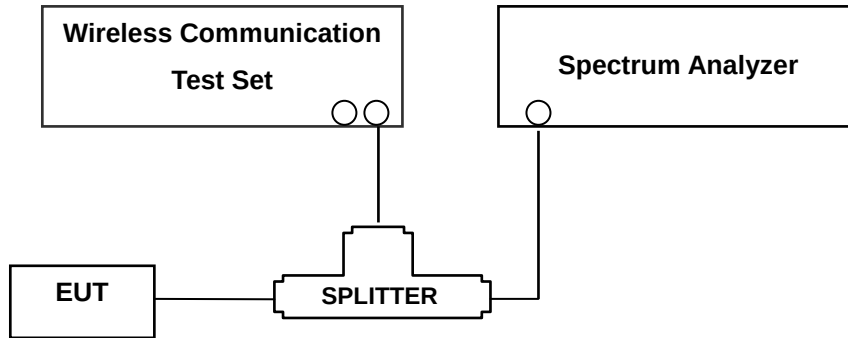

(Configuration of conducted Emission measurement)

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

Test Procedure

OBW is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r02, October 17, 2014, Section 4.2.

The EUT makes a call to the communication simulator. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels(low, middle and high operational range.)

The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.

Test Procedure

Spurious and harmonic emissions at antenna terminal is tested in accordance with KDB971168 D01 Power Meas License Digital Systems v02r02, October 17, 2014, Section 6.0.

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer.


The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30kHz bandwidth may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency

NOTES: The analyzer plot offsets were determined by below conditions.

- For LTE Band 17, total offset 26.8 dB = 20 dB attenuator + 6 dB Divider + 0.8 dB RF cables.
- For LTE Band 4, total offset 27.5 dB = 20 dB attenuator + 6 dB Divider + 1.5 dB RF cables.

3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

Test Set-up

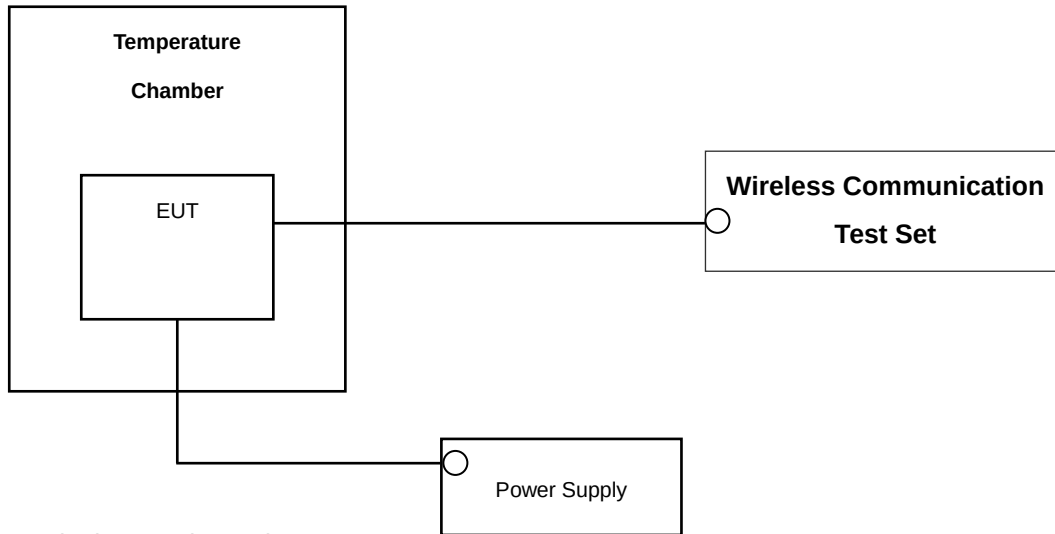

* Nominal Operating Voltage

Test Procedure

Frequency stability is tested in accordance with ANSI/TIA-603-D-2010 section 2.2.2

The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from - 30 °C to + 50 °C using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from the end point to 100 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

Specification — the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block

Time Period and Procedure:

The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).

1. The equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
2. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

NOTE: The EUT is tested down to the battery endpoint.

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Interval	Calibration Due
LG-Innotek	WCD-110 / Wireless Charger	MSIP-RMS-LGE-WCD 110		
DURACELL	DURACELL POWERMAT(CT 06801) /Powermat	34112333855L		
Agilent	N1921A/ Power Sensor	MY45241059	Annual	07/09/2016
Agilent	N1911A/ Power Meter	MY45100523	Annual	07/09/2016
MITEQ	AMF-6D-001180-35-20P/AMP	1081666	Annual	09/03/2016
Wainwright	WHK1.2/15G-10EF/H.P.F	4	Annual	04/27/2016
Wainwright	WHK3.3/18G-10EF/H.P.F	2	Annual	04/27/2016
Hewlett Packard	11667B / Power Splitter	10545	Annual	02/16/2016
Hewlett Packard	11667B / Power Splitter	11275	Annual	04/29/2016
ITECT	IT6720/ Power Supply	010002156267001199	Annual	11/04/2015
Schwarzbeck	UHAP/ Dipole Antenna	557	Biennial	03/23/2017
Schwarzbeck	UHAP/ Dipole Antenna	558	Biennial	03/23/2017
EXP	EX-TH400/ Chamber	None	Annual	05/29/2016
Schwarzbeck	BBHA 9120D/ Horn Antenna	147	Biennial	09/01/2016
Schwarzbeck	BBHA 9120D/ Horn Antenna	1299	Biennial	05/15/2017
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170342	Biennial	04/30/2017
Schwarzbeck	BBHA 9170/ Horn Antenna(15~35GHz)	BBHA9170124	Biennial	04/30/2017
Agilent	N9020A/Signal Analyzer	MY51110063	Annual	04/29/2016
WEINSCHL	ATTENUATOR	BR0592	Annual	10/22/2015
REOHDE&SCHWARZ	FSV40/Spectrum Analyzer	1307.9002K40-100931-NK	Annual	06/04/2016
Anritsu Corp	MT8820C/ Wideband Radio Communication Tester	6200863156	Annual	03/24/2016

5. SUMMARY OF TEST RESULTS

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS
2.1051, 27.53(g), 27.53(h)	Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	$< 43 + 10 \log_{10} (P[\text{Watts}])$ at Band Edge and for all-of-band emissions		PASS
27.50(d)(5)	Peak-Average Ratio	$< 13 \text{ dB}$		PASS
*2.1046	Conducted Output Power	N/A		PASS
2.1055, 27.54	Frequency stability / variation of ambient temperature	Emission must remain in band		PASS
27.50(c)(10)	Effective Radiated Power (Band 17)	$< 3 \text{ Watts max. ERP}$	RADIATED	PASS
27.50(d)(4)	Equivalent Isotropic Radiated Power (Band 4)	$< 1 \text{ Watts max. EIRP}$		PASS
2.1053, 27.53(g), 27.53(h)	Undesirable Out-of-Band Emissions	$< 43 + 10 \log_{10} (P[\text{Watts}])$ for all out-of-band emissions		PASS

*: See SAR Report

6. SAMPLE CALCULATION

A. EIRP Sample Calculation

Mode	Ch./ Freq.		Measured Level(dBm)	Substitute LEVEL(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
	channel	Freq.(MHz)						W	dBm
LTE Band4	20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

EIRP = SubstituteLEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a wooden tripod is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated and the antenna height is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power (**EIRP**).

B. Emission Designator

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

16QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = main carrier modulated in a combination of two

or more of the following modes;

amplitude, angle, pulse

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

7. TEST DATA

7.1 EFFECTIVE RADIATED POWER (Band 17)_Standalone with normal cover

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	ERP	
								W	dBm
706.5	5 MHz	QPSK	-34.21	26.60	-10.19	0.81	H	0.036	15.60
		16-QAM	-35.12	25.69	-10.19	0.81	H	0.029	14.69
710.0		QPSK	-33.87	27.05	-10.21	0.81	H	0.040	16.03
		16-QAM	-34.70	26.22	-10.21	0.81	H	0.033	15.20
713.5		QPSK	-33.50	27.43	-10.23	0.82	H	0.043	16.38
		16-QAM	-34.24	26.69	-10.23	0.82	H	0.037	15.64

Effective Radiated Power Data (5 MHz Band 17 LTE)

Note: All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	ERP	
								W	dBm
709.0	10 MHz	QPSK	-34.15	26.73	-10.20	0.81	H	0.037	15.72
		16-QAM	-35.05	25.83	-10.20	0.81	H	0.030	14.82
710.0		QPSK	-33.91	27.07	-10.20	0.81	H	0.040	16.06
		16-QAM	-34.77	26.21	-10.20	0.81	H	0.033	15.20
711.0		QPSK	-33.87	27.04	-10.21	0.81	H	0.040	16.02
		16-QAM	-34.80	26.11	-10.21	0.81	H	0.032	15.09

Effective Radiated Power Data (10 MHz Band 17 LTE)

Note: All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case

NOTES:Effective Radiated Power Output Measurements by Substitution Methodaccording to ANSI/TIA/EIA-603-D-2010 June 24, 2010:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For LTE signals, $RBW = 1\text{-}5\%$ of the OBW, not to exceed 1MHz, $VBW \geq 3 \times RBW$, Detector = RMS. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is z plane in LTE mode. Also worst case of detecting Antenna is horizontal polarization in LTE mode.

7.2 EQUIVALENT ISOTROPIC RADIATED POWER (Band 4)_Standalone with normal cover

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1710.7	1.4 MHz	QPSK	-21.87	10.61	9.88	1.31	H	0.083	19.18
		16-QAM	-22.55	9.93	9.88	1.31	H	0.071	18.50
1732.5		QPSK	-22.07	10.41	9.96	1.32	H	0.080	19.05
		16-QAM	-22.80	9.68	9.96	1.32	H	0.068	18.32
1754.3		QPSK	-22.57	9.88	10.01	1.33	H	0.072	18.56
		16-QAM	-23.47	8.98	10.01	1.33	H	0.058	17.66

Equivalent Isotropic Radiated Power Data (1.4 MHz Band4 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1711.5	3 MHz	QPSK	-21.99	10.49	9.88	1.31	H	0.081	19.06
		16-QAM	-22.73	9.75	9.88	1.31	H	0.068	18.32
1732.5		QPSK	-22.20	10.28	9.95	1.32	H	0.078	18.91
		16-QAM	-22.83	9.65	9.95	1.32	H	0.067	18.28
1753.5		QPSK	-22.69	9.75	10.01	1.33	H	0.070	18.43
		16-QAM	-23.57	8.87	10.01	1.33	H	0.057	17.55

Equivalent Isotropic Radiated Power Data (3 MHz Band4 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1712.5	5 MHz	QPSK	-21.88	10.60	9.88	1.31	H	0.083	19.17
		16-QAM	-22.57	9.91	9.88	1.31	H	0.071	18.48
1732.5		QPSK	-22.05	10.42	9.95	1.32	H	0.080	19.05
		16-QAM	-22.81	9.66	9.95	1.32	H	0.067	18.29
1752.5		QPSK	-22.49	9.94	10.01	1.33	H	0.073	18.62
		16-QAM	-23.35	9.08	10.01	1.33	H	0.060	17.76

Equivalent Isotropic Radiated Power Data (5 MHz Band4 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1715.0	10 MHz	QPSK	-21.75	10.73	9.88	1.31	H	0.085	19.30
		16-QAM	-22.33	10.15	9.88	1.31	H	0.075	18.72
1732.5		QPSK	-21.90	10.57	9.94	1.32	H	0.083	19.19
		16-QAM	-22.45	10.02	9.94	1.32	H	0.073	18.64
1750.0		QPSK	-22.06	10.44	10.00	1.33	H	0.081	19.11
		16-QAM	-22.83	9.67	10.00	1.33	H	0.068	18.34

Equivalent Isotropic Radiated Power Data (10 MHz Band4 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1717.5	15 MHz	QPSK	-21.61	10.87	9.88	1.31	H	0.088	19.44
		16-QAM	-22.36	10.12	9.88	1.31	H	0.074	18.69
1732.5		QPSK	-21.87	10.60	9.93	1.32	H	0.083	19.21
		16-QAM	-22.52	9.95	9.93	1.32	H	0.072	18.56
1747.5		QPSK	-22.02	10.54	9.98	1.32	H	0.083	19.20
		16-QAM	-23.12	9.44	9.98	1.32	H	0.065	18.10

Equivalent Isotropic Radiated Power Data (15 MHz Band4 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1720.0	20 MHz	QPSK	-21.66	10.82	9.88	1.31	H	0.087	19.39
		16-QAM	-22.22	10.26	9.88	1.31	H	0.076	18.83
1732.5		QPSK	-21.76	10.70	9.92	1.31	H	0.085	19.31
		16-QAM	-22.49	9.97	9.92	1.31	H	0.072	18.58
1745.0		QPSK	-22.00	10.53	9.97	1.32	H	0.083	19.18
		16-QAM	-22.65	9.88	9.97	1.32	H	0.071	18.53

Equivalent Isotropic Radiated Power Data (20 MHz Band4 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

NOTES:Equivalent Isotropic Radiated Power Measurements by Substitution Methodaccording to ANSI/TIA/EIA-603-D-2010 June 24, 2010:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For LTE signals, RBW = 1-5% of the OBW, not to exceed 1MHz, VBW $\geq 3 \times$ RBW, Detector = RMS. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is x plane in LTE mode. Also worst case of detecting Antenna is horizontal polarization in LTE mode.

7.3 EFFECTIVE RADIATED POWER (Band 17)_Standalone with wireless charging cover

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	ERP	
								W	dBm
706.5	5 MHz	QPSK	-33.69	27.12	-10.19	0.81	V	0.041	16.12
		16-QAM	-34.57	26.24	-10.19	0.81	V	0.033	15.24
710.0		QPSK	-33.45	27.47	-10.21	0.81	V	0.044	16.45
		16-QAM	-34.19	26.73	-10.21	0.81	V	0.037	15.71
713.5		QPSK	-33.00	27.93	-10.23	0.82	V	0.049	16.88
		16-QAM	-33.82	27.11	-10.23	0.82	V	0.040	16.06

Effective Radiated Power Data (5 MHz Band 17 LTE)

Note: All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	ERP	
								W	dBm
709.0	10 MHz	QPSK	-33.64	27.24	-10.20	0.81	V	0.042	16.23
		16-QAM	-34.45	26.43	-10.20	0.81	V	0.035	15.42
710.0		QPSK	-33.45	27.53	-10.20	0.81	V	0.045	16.52
		16-QAM	-34.30	26.68	-10.20	0.81	V	0.037	15.67
711.0		QPSK	-33.42	27.49	-10.21	0.81	V	0.044	16.47
		16-QAM	-34.19	26.72	-10.21	0.81	V	0.037	15.70

Effective Radiated Power Data (10 MHz Band 17 LTE)

Note: All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case

NOTES:Effective Radiated Power Output Measurements by Substitution Methodaccording to ANSI/TIA/EIA-603-D-2010 June 24, 2010:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For LTE signals, $RBW = 1\text{-}5\%$ of the OBW, not to exceed 1MHz, $VBW \geq 3 \times RBW$, Detector = RMS. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is y plane in LTE mode. Also worst case of detecting Antenna is vertical polarization in LTE mode.

7.4 EQUIVALENT ISOTROPIC RADIATED POWER (Band 4) _Standalone with wireless charging cover

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1710.7	1.4 MHz	QPSK	-22.09	10.39	9.88	1.31	H	0.079	18.96
		16-QAM	-22.83	9.65	9.88	1.31	H	0.066	18.22
1732.5		QPSK	-22.16	10.32	9.96	1.32	H	0.079	18.96
		16-QAM	-22.96	9.52	9.96	1.32	H	0.065	18.16
1754.3		QPSK	-22.59	9.86	10.01	1.33	H	0.071	18.54
		16-QAM	-23.36	9.09	10.01	1.33	H	0.060	17.77

Equivalent Isotropic Radiated Power Data (1.4 MHz Band4 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1711.5	3 MHz	QPSK	-22.11	10.37	9.88	1.31	H	0.078	18.94
		16-QAM	-22.81	9.67	9.88	1.31	H	0.067	18.24
1732.5		QPSK	-22.18	10.30	9.95	1.32	H	0.078	18.93
		16-QAM	-23.00	9.48	9.95	1.32	H	0.065	18.11
1753.5		QPSK	-22.58	9.86	10.01	1.33	H	0.071	18.54
		16-QAM	-23.49	8.95	10.01	1.33	H	0.058	17.63

Equivalent Isotropic Radiated Power Data (3 MHz Band4 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1712.5	5 MHz	QPSK	-22.02	10.46	9.88	1.31	H	0.080	19.03
		16-QAM	-22.67	9.81	9.88	1.31	H	0.069	18.38
1732.5		QPSK	-22.11	10.36	9.95	1.32	H	0.079	18.99
		16-QAM	-22.82	9.65	9.95	1.32	H	0.067	18.28
1752.5		QPSK	-22.53	9.90	10.01	1.33	H	0.072	18.58
		16-QAM	-23.29	9.14	10.01	1.33	H	0.061	17.82

Equivalent Isotropic Radiated Power Data (5 MHz Band4 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1715.0	10 MHz	QPSK	-21.85	10.63	9.88	1.31	H	0.083	19.20
		16-QAM	-22.75	9.73	9.88	1.31	H	0.068	18.30
1732.5		QPSK	-21.95	10.52	9.94	1.32	H	0.082	19.14
		16-QAM	-22.69	9.78	9.94	1.32	H	0.069	18.40
1750.0		QPSK	-22.06	10.44	10.00	1.33	H	0.081	19.11
		16-QAM	-22.96	9.54	10.00	1.33	H	0.066	18.21

Equivalent Isotropic Radiated Power Data (10 MHz Band4 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1717.5	15 MHz	QPSK	-21.75	10.73	9.88	1.31	H	0.085	19.30
		16-QAM	-22.36	10.12	9.88	1.31	H	0.074	18.69
1732.5		QPSK	-21.79	10.68	9.93	1.32	H	0.085	19.29
		16-QAM	-22.68	9.79	9.93	1.32	H	0.069	18.40
1747.5		QPSK	-22.08	10.48	9.98	1.32	H	0.082	19.14
		16-QAM	-22.91	9.65	9.98	1.32	H	0.068	18.31

Equivalent Isotropic Radiated Power Data (15 MHz Band4 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1720.0	20 MHz	QPSK	-21.77	10.71	9.88	1.31	H	0.085	19.28
		16-QAM	-22.31	10.17	9.88	1.31	H	0.075	18.74
1732.5		QPSK	-21.87	10.59	9.92	1.31	H	0.083	19.20
		16-QAM	-22.47	9.99	9.92	1.31	H	0.072	18.60
1745.0		QPSK	-22.05	10.48	9.97	1.32	H	0.082	19.13
		16-QAM	-22.64	9.89	9.97	1.32	H	0.071	18.54

Equivalent Isotropic Radiated Power Data (20 MHz Band4 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

NOTES:Equivalent Isotropic Radiated Power Measurements by Substitution Methodaccording to ANSI/TIA/EIA-603-D-2010 June 24, 2010:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For LTE signals, RBW = 1-5% of the OBW, not to exceed 1MHz, VBW $\geq 3 \times$ RBW, Detector = RMS. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is x plane in LTE mode. Also worst case of detecting Antenna is horizontal polarization in LTE mode.

7.5 EFFECTIVE RADIATED POWER (Band 17)_With wireless charging pad(WCD-110)

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	ERP	
								W	dBm
706.5	5 MHz	QPSK	-33.49	27.32	-10.19	0.81	V	0.043	16.32
		16-QAM	-34.26	26.55	-10.19	0.81	V	0.036	15.55
710.0		QPSK	-33.68	27.24	-10.21	0.81	V	0.042	16.22
		16-QAM	-34.36	26.56	-10.21	0.81	V	0.036	15.54
713.5		QPSK	-33.59	27.34	-10.23	0.82	V	0.043	16.29
		16-QAM	-34.41	26.52	-10.23	0.82	V	0.035	15.47

Effective Radiated Power Data (5 MHz Band 17 LTE)

Note: All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	ERP	
								W	dBm
709.0	10 MHz	QPSK	-33.49	27.39	-10.20	0.81	V	0.043	16.38
		16-QAM	-34.36	26.52	-10.20	0.81	V	0.036	15.51
710.0		QPSK	-33.40	27.58	-10.20	0.81	V	0.045	16.57
		16-QAM	-34.23	26.75	-10.20	0.81	V	0.038	15.74
711.0		QPSK	-33.53	27.38	-10.21	0.81	V	0.043	16.36
		16-QAM	-34.34	26.57	-10.21	0.81	V	0.036	15.55

Effective Radiated Power Data (10 MHz Band 17 LTE)

Note: All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case

NOTES:Effective Radiated Power Output Measurements by Substitution Methodaccording to ANSI/TIA/EIA-603-D-2010 June 24, 2010:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For LTE signals, $RBW = 1\text{-}5\%$ of the OBW, not to exceed 1MHz, $VBW \geq 3 \times RBW$, Detector = RMS. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is y plane in LTE mode. Also worst case of detecting Antenna is vertical polarization in LTE mode.

7.6 EQUIVALENT ISOTROPIC RADIATED POWER (Band 4) _With wireless charging pad(WCD-110)

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1710.7	1.4 MHz	QPSK	-24.55	7.93	9.88	1.31	H	0.045	16.50
		16-QAM	-25.23	7.25	9.88	1.31	H	0.038	15.82
1732.5		QPSK	-24.51	7.97	9.96	1.32	H	0.046	16.61
		16-QAM	-25.23	7.25	9.96	1.32	H	0.039	15.89
1754.3		QPSK	-24.68	7.77	10.01	1.33	H	0.044	16.45
		16-QAM	-25.46	6.99	10.01	1.33	H	0.037	15.67

Equivalent Isotropic Radiated Power Data (1.4 MHz Band4 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1711.5	3 MHz	QPSK	-24.72	7.76	9.88	1.31	H	0.043	16.33
		16-QAM	-25.50	6.98	9.88	1.31	H	0.036	15.55
1732.5		QPSK	-24.51	7.97	9.95	1.32	H	0.046	16.60
		16-QAM	-25.32	7.16	9.95	1.32	H	0.038	15.79
1753.5		QPSK	-24.82	7.62	10.01	1.33	H	0.043	16.30
		16-QAM	-25.58	6.86	10.01	1.33	H	0.036	15.54

Equivalent Isotropic Radiated Power Data (3 MHz Band4 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1712.5	5 MHz	QPSK	-24.63	7.85	9.88	1.31	H	0.044	16.42
		16-QAM	-25.29	7.19	9.88	1.31	H	0.038	15.76
1732.5		QPSK	-24.46	8.01	9.95	1.32	H	0.046	16.64
		16-QAM	-25.19	7.28	9.95	1.32	H	0.039	15.91
1752.5		QPSK	-24.84	7.59	10.01	1.33	H	0.042	16.27
		16-QAM	-25.60	6.83	10.01	1.33	H	0.036	15.51

Equivalent Isotropic Radiated Power Data (5 MHz Band4 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1715.0	10 MHz	QPSK	-24.63	7.85	9.88	1.31	H	0.044	16.42
		16-QAM	-25.35	7.13	9.88	1.31	H	0.037	15.70
1732.5		QPSK	-24.46	8.01	9.94	1.32	H	0.046	16.63
		16-QAM	-25.22	7.25	9.94	1.32	H	0.039	15.87
1750.0		QPSK	-24.62	7.88	10.00	1.33	H	0.045	16.55
		16-QAM	-25.20	7.30	10.00	1.33	H	0.040	15.97

Equivalent Isotropic Radiated Power Data (10 MHz Band4 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1717.5	15 MHz	QPSK	-24.31	8.17	9.88	1.31	H	0.047	16.74
		16-QAM	-25.12	7.36	9.88	1.31	H	0.039	15.93
1732.5		QPSK	-24.32	8.15	9.93	1.32	H	0.047	16.76
		16-QAM	-25.15	7.32	9.93	1.32	H	0.039	15.93
1747.5		QPSK	-24.53	8.03	9.98	1.32	H	0.047	16.69
		16-QAM	-25.34	7.22	9.98	1.32	H	0.039	15.88

Equivalent Isotropic Radiated Power Data (15 MHz Band4 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1720.0	20 MHz	QPSK	-24.39	8.09	9.88	1.31	H	0.046	16.66
		16-QAM	-25.04	7.44	9.88	1.31	H	0.040	16.01
1732.5		QPSK	-24.22	8.24	9.92	1.31	H	0.048	16.85
		16-QAM	-25.02	7.44	9.92	1.31	H	0.040	16.05
1745.0		QPSK	-24.46	8.07	9.97	1.32	H	0.047	16.72
		16-QAM	-25.18	7.35	9.97	1.32	H	0.040	16.00

Equivalent Isotropic Radiated Power Data (20 MHz Band4 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

NOTES:Equivalent Isotropic Radiated Power Measurements by Substitution Methodaccording to ANSI/TIA/EIA-603-D-2010 June 24, 2010:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For LTE signals, RBW = 1-5% of the OBW, not to exceed 1MHz, VBW $\geq 3 \times$ RBW, Detector = RMS. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is y plane in LTE mode. Also worst case of detecting Antenna is horizontal polarization in LTE mode.

7.7 EFFECTIVE RADIATED POWER (Band 17)_With wireless charging pad(CT 06801)

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	ERP	
								W	dBm
706.5	5 MHz	QPSK	-35.53	25.28	-10.19	0.81	H	0.027	14.28
		16-QAM	-36.30	24.51	-10.19	0.81	H	0.022	13.51
710.0		QPSK	-35.14	25.78	-10.21	0.81	H	0.030	14.76
		16-QAM	-35.95	24.97	-10.21	0.81	H	0.025	13.95
713.5		QPSK	-34.46	26.47	-10.23	0.82	H	0.035	15.42
		16-QAM	-35.24	25.69	-10.23	0.82	H	0.029	14.64

Effective Radiated Power Data (5 MHz Band 17 LTE)

Note: All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	ERP	
								W	dBm
709.0	10 MHz	QPSK	-35.48	25.40	-10.20	0.81	H	0.027	14.39
		16-QAM	-36.25	24.63	-10.20	0.81	H	0.023	13.62
710.0		QPSK	-35.26	25.72	-10.20	0.81	H	0.030	14.71
		16-QAM	-35.96	25.02	-10.20	0.81	H	0.025	14.01
711.0		QPSK	-35.14	25.77	-10.21	0.81	H	0.030	14.75
		16-QAM	-35.76	25.15	-10.21	0.81	H	0.026	14.13

Effective Radiated Power Data (10 MHz Band 17 LTE)

Note: All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case

NOTES:Effective Radiated Power Output Measurements by Substitution Methodaccording to ANSI/TIA/EIA-603-D-2010 June 24, 2010:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For LTE signals, $RBW = 1\text{-}5\%$ of the OBW, not to exceed 1MHz, $VBW \geq 3 \times RBW$, Detector = RMS. A half-wave dipole was substituted in place of the EUT. This dipole antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the dipole is measured. The ERP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is x plane in LTE mode. Also worst case of detecting Antenna is horizontal polarization in LTE mode.

7.8 EQUIVALENT ISOTROPIC RADIATED POWER (Band 4) _With wireless charging pad(CT 06801)

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1710.7	1.4 MHz	QPSK	-22.96	9.52	9.88	1.31	H	0.064	18.09
		16-QAM	-23.83	8.65	9.88	1.31	H	0.053	17.22
1732.5		QPSK	-23.49	8.99	9.96	1.32	H	0.058	17.63
		16-QAM	-24.19	8.29	9.96	1.32	H	0.049	16.93
1754.3		QPSK	-24.67	7.78	10.01	1.33	H	0.044	16.46
		16-QAM	-25.32	7.13	10.01	1.33	H	0.038	15.81

Equivalent Isotropic Radiated Power Data (1.4 MHz Band4 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1711.5	3 MHz	QPSK	-22.99	9.49	9.88	1.31	H	0.064	18.06
		16-QAM	-23.82	8.66	9.88	1.31	H	0.053	17.23
1732.5		QPSK	-23.46	9.02	9.95	1.32	H	0.058	17.65
		16-QAM	-24.29	8.19	9.95	1.32	H	0.048	16.82
1753.5		QPSK	-24.58	7.86	10.01	1.33	H	0.045	16.54
		16-QAM	-25.38	7.06	10.01	1.33	H	0.038	15.74

Equivalent Isotropic Radiated Power Data (3 MHz Band4 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1712.5	5 MHz	QPSK	-22.72	9.76	9.88	1.31	H	0.068	18.33
		16-QAM	-23.58	8.90	9.88	1.31	H	0.056	17.47
1732.5		QPSK	-23.45	9.02	9.95	1.32	H	0.058	17.65
		16-QAM	-24.17	8.30	9.95	1.32	H	0.049	16.93
1752.5		QPSK	-24.44	7.99	10.01	1.33	H	0.046	16.67
		16-QAM	-25.24	7.19	10.01	1.33	H	0.039	15.87

Equivalent Isotropic Radiated Power Data (5 MHz Band4 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1715.0	10 MHz	QPSK	-22.82	9.66	9.88	1.31	H	0.067	18.23
		16-QAM	-23.36	9.12	9.88	1.31	H	0.059	17.69
1732.5		QPSK	-23.30	9.17	9.94	1.32	H	0.060	17.79
		16-QAM	-24.01	8.46	9.94	1.32	H	0.051	17.08
1750.0		QPSK	-23.98	8.52	10.00	1.33	H	0.052	17.19
		16-QAM	-24.52	7.98	10.00	1.33	H	0.046	16.65

Equivalent Isotropic Radiated Power Data (10 MHz Band4 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1717.5	15 MHz	QPSK	-22.66	9.82	9.88	1.31	H	0.069	18.39
		16-QAM	-23.40	9.08	9.88	1.31	H	0.058	17.65
1732.5		QPSK	-22.76	9.71	9.93	1.32	H	0.068	18.32
		16-QAM	-23.50	8.97	9.93	1.32	H	0.057	17.58
1747.5		QPSK	-23.30	9.26	9.98	1.32	H	0.062	17.92
		16-QAM	-24.31	8.25	9.98	1.32	H	0.049	16.91

Equivalent Isotropic Radiated Power Data (15 MHz Band4 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	
								W	dBm
1720.0	20 MHz	QPSK	-22.72	9.76	9.88	1.31	H	0.068	18.33
		16-QAM	-23.36	9.12	9.88	1.31	H	0.059	17.69
1732.5		QPSK	-22.81	9.65	9.92	1.31	H	0.067	18.26
		16-QAM	-23.70	8.76	9.92	1.31	H	0.055	17.37
1745.0		QPSK	-23.40	9.13	9.97	1.32	H	0.060	17.78
		16-QAM	-24.05	8.48	9.97	1.32	H	0.052	17.13

Equivalent Isotropic Radiated Power Data (20 MHz Band4 LTE)

Note: All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

NOTES:Equivalent Isotropic Radiated Power Measurements by Substitution Methodaccording to ANSI/TIA/EIA-603-D-2010 June 24, 2010:

The EUT was placed on a non-conductive styrofoam resin table 3-meters from the receive antenna. The receive antenna height and turntable rotation was adjusted for the highest reading on the receive spectrum analyzer. For LTE signals, RBW = 1-5% of the OBW, not to exceed 1MHz, VBW $\geq 3 \times$ RBW, Detector = RMS. A Horn antenna was substituted in place of the EUT. This Horn antenna was driven by a signal generator and the level of the signal generator was adjusted to obtain the same receive spectrum analyzer reading. The conducted power at the terminals of the Horn antenna is measured. The difference between the gain of the horn and an isotropic antenna is taken into consideration and the EIRP is recorded.

Also, we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna. The worst case of the EUT is x plane in LTE mode. Also worst case of detecting Antenna is horizontal polarization in LTE mode.

7.9 RADIATED SPURIOUS EMISSIONS_Standalone with normal cover

7.9.1 RADIATED SPURIOUS EMISSIONS (5 MHz Band 17 LTE)

- OPERATING FREQUENCY: 713.5 MHz
- MEASURED OUTPUT POWER: 16.38dBm = 0.043 W
- MODULATION SIGNAL: 5 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 29.38dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	ERP (dBm)	dBc
23755 (706.50)	1,413.00	-53.43	7.82	-59.21	1.18	V	-52.57	68.95
	2,119.50	-58.17	9.55	-63.36	1.46	V	-55.27	71.65
	2,826.00	-58.94	10.84	-62.93	1.71	V	-53.80	70.18
23790 (710.00)	1,420.00	-52.64	7.86	-58.35	1.19	V	-51.68	68.06
	2,130.00	-57.13	9.49	-61.57	1.45	V	-53.53	69.91
	2,840.00	-59.66	10.90	-63.56	1.72	V	-54.38	70.76
23825 (713.50)	1,427.00	-53.07	7.90	-58.66	1.19	V	-51.95	68.33
	2,140.50	-57.83	9.42	-62.31	1.46	H	-54.35	70.73
	2,854.00	-58.03	10.95	-62.11	1.69	V	-52.85	69.23

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case
 5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

7.9.2 RADIATED SPURIOUS EMISSIONS (10 MHz Band 17 LTE)

- OPERATING FREQUENCY: 710.0 MHz
- MEASURED OUTPUT POWER: 16.06dBm = 0.040 W
- MODULATION SIGNAL: 10 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 29.06dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	ERP (dBm)	dBc
23780 (709.00)	1,418.00	-53.16	7.85	-58.89	1.19	V	-52.23	68.29
	2,127.00	-55.84	9.51	-60.51	1.45	V	-52.45	68.51
	2,836.00	-58.64	10.88	-62.54	1.71	V	-53.37	69.43
23790 (710.00)	1,420.00	-51.40	7.86	-57.11	1.19	V	-50.44	66.50
	2,130.00	-56.49	9.49	-60.93	1.45	V	-52.89	68.95
	2,840.00	-57.13	10.90	-61.03	1.72	V	-51.85	67.91
23800 (711.00)	1,422.00	-51.65	7.87	-57.32	1.19	V	-50.64	66.70
	2,133.00	-55.62	9.47	-60.08	1.45	H	-52.06	68.12
	2,844.00	-57.47	10.92	-61.43	1.71	V	-52.22	68.28

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case
 5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

7.9.3 RADIATED SPURIOUS EMISSIONS (1.4 MHz Band 4 LTE)

- OPERATING FREQUENCY: 1710.70 MHz
- MEASURED OUTPUT POWER: 19.18dBm = 0.083 W
- MODULATION SIGNAL: 1.4 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 32.18dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
19957 (1710.7)	3,421.40	-46.96	12.36	-52.04	1.94	H	-41.62	60.80
	5,132.10	-54.50	12.34	-52.58	2.37	H	-42.61	61.79
	6,842.80	-53.00	12.17	-46.50	2.81	V	-37.14	56.32
20175 (1732.5)	3,465.00	-45.53	12.27	-50.09	1.87	H	-39.69	58.87
	5,197.50	-57.13	12.63	-55.58	2.45	H	-45.40	64.58
	6,930.00	-53.80	11.87	-46.20	2.84	H	-37.17	56.35
20393 (1754.3)	3,508.60	-49.80	12.15	-53.92	2.00	H	-43.77	62.95
	5,262.90	-56.64	12.91	-55.84	2.41	H	-45.34	64.52
	7,017.20	-53.05	11.57	-45.43	2.90	H	-36.76	55.94

NOTES: 1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method

according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:

2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

7.9.4 RADIATED SPURIOUS EMISSIONS (3 MHz Band 4 LTE)

- OPERATING FREQUENCY: 1711.50 MHz
- MEASURED OUTPUT POWER: 19.06dBm = 0.081 W
- MODULATION SIGNAL: 3 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 32.06dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
19965 (1711.5)	3,423.00	-50.82	12.35	-55.92	1.94	H	-45.51	64.57
	5,134.50	-54.34	12.35	-52.35	2.37	H	-42.37	61.43
	6,846.00	-51.60	12.16	-45.11	2.80	V	-35.75	54.81
20175 (1732.5)	3,465.00	-45.86	12.27	-50.42	1.87	H	-40.02	59.08
	5,197.50	-52.99	12.63	-51.44	2.45	H	-41.26	60.32
	6,930.00	-54.06	11.87	-46.46	2.84	V	-37.43	56.49
20385 (1753.5)	3,507.00	-50.63	12.15	-54.75	1.99	H	-44.59	63.65
	5,260.50	-53.29	12.90	-52.46	2.42	H	-41.98	61.04
	7,014.00	-52.29	11.59	-44.82	2.91	H	-36.14	55.20

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
 5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

7.9.5 RADIATED SPURIOUS EMISSIONS (5 MHz Band 4 LTE)

- OPERATING FREQUENCY: 1712.50 MHz
- MEASURED OUTPUT POWER: 19.17dBm = 0.083 W
- MODULATION SIGNAL: 5 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 32.17dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
19975 (1712.5)	3,425.00	-45.72	12.35	-50.86	1.95	H	-40.46	59.63
	5,137.50	-57.30	12.36	-55.22	2.38	H	-45.24	64.41
	6,850.00	-51.90	12.15	-45.42	2.80	V	-36.07	55.24
20175 (1732.5)	3,465.00	-46.89	12.27	-51.45	1.87	H	-41.05	60.22
	5,197.50	-55.48	12.63	-53.93	2.45	H	-43.75	62.92
	6,930.00	-52.54	11.87	-44.94	2.84	H	-35.91	55.08
20375 (1752.5)	3,505.00	-46.75	12.15	-50.88	1.98	H	-40.71	59.88
	5,257.50	-54.41	12.89	-53.58	2.41	H	-43.10	62.27
	7,010.00	-50.38	11.61	-43.10	2.91	H	-34.40	53.57

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
 5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

7.9.6 RADIATED SPURIOUS EMISSIONS (10 MHz Band 4 LTE)

- OPERATING FREQUENCY: 1715.00 MHz
- MEASURED OUTPUT POWER: 19.30dBm = 0.085 W
- MODULATION SIGNAL: 10 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 32.30dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20000 (1715.0)	3,430.00	-45.82	12.34	-51.05	1.95	H	-40.66	59.96
	5,145.00	-55.14	12.38	-53.10	2.39	H	-43.11	62.41
	6,860.00	-52.55	12.11	-46.11	2.81	H	-36.81	56.11
20175 (1732.5)	3,465.00	-48.88	12.27	-53.44	1.87	H	-43.04	62.34
	5,197.50	-55.37	12.63	-53.82	2.45	H	-43.64	62.94
	6,930.00	-53.68	11.87	-46.08	2.84	H	-37.05	56.35
20350 (1750.0)	3,500.00	-45.32	12.15	-49.47	1.95	H	-39.27	58.57
	5,250.00	-54.67	12.87	-53.83	2.39	H	-43.35	62.65
	7,000.00	-53.37	11.65	-46.70	2.85	H	-37.90	57.20

NOTES: 1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method

according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:

2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

7.9.7 RADIATED SPURIOUS EMISSIONS (15 MHz Band 4 LTE)

- OPERATING FREQUENCY: 1717.50 MHz
- MEASURED OUTPUT POWER: 19.44dBm = 0.088 W
- MODULATION SIGNAL: 15 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 32.44dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20025 (1717.5)	3,435.00	-46.72	12.34	-51.70	1.92	H	-41.28	60.72
	5,152.50	-52.98	12.40	-51.09	2.39	H	-41.08	60.52
	6,870.00	-52.23	12.08	-45.97	2.79	V	-36.68	56.12
20175 (1732.5)	3,465.00	-46.40	12.27	-50.96	1.87	H	-40.56	60.00
	5,197.50	-56.43	12.63	-54.88	2.45	V	-44.70	64.14
	6,930.00	-52.45	11.87	-44.85	2.84	H	-35.82	55.26
20325 (1747.5)	3,495.00	-45.57	12.17	-49.84	1.93	H	-39.60	59.04
	5,242.50	-55.60	12.83	-54.61	2.41	V	-44.19	63.63
	6,990.00	-51.87	11.68	-43.96	2.80	H	-35.08	54.52

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
 5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

7.9.8 RADIATED SPURIOUS EMISSIONS (20 MHz Band 4 LTE)

- OPERATING FREQUENCY: 1720.00 MHz
- MEASURED OUTPUT POWER: 19.39dBm = 0.087 W
- MODULATION SIGNAL: 20 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 32.39dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20050 (1720.0)	3,440.00	-44.84	12.33	-49.55	1.89	H	-39.11	58.50
	5,160.00	-55.01	12.44	-53.22	2.40	H	-43.18	62.57
	6,880.00	-52.14	12.04	-45.43	2.78	H	-36.17	55.56
20175 (1732.5)	3,465.00	-48.05	12.27	-52.61	1.87	H	-42.21	61.60
	5,197.50	-56.38	12.63	-54.83	2.45	H	-44.65	64.04
	6,930.00	-52.82	11.87	-45.22	2.84	H	-36.19	55.58
20300 (1745.0)	3,490.00	-46.80	12.18	-51.20	1.90	H	-40.92	60.31
	5,235.00	-55.57	12.80	-54.38	2.42	H	-44.00	63.39
	6,980.00	-53.12	11.71	-44.96	2.79	H	-36.04	55.43

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
 5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

7.10 RADIATED SPURIOUS EMISSIONS_ Standalone with wireless charging cover

7.10.1 RADIATED SPURIOUS EMISSIONS (5 MHz Band 17 LTE)

- OPERATING FREQUENCY: 713.5 MHz
- MEASURED OUTPUT POWER: 16.88dBm = 0.049 W
- MODULATION SIGNAL: 5 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 29.88dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	ERP (dBm)	dBc
23755 (706.50)	1,413.00	-52.95	7.82	-58.73	1.18	V	-52.09	68.97
	2,119.50	-45.04	9.55	-50.23	1.46	H	-42.14	59.02
	2,826.00	-58.20	10.84	-62.19	1.71	H	-53.06	69.94
23790 (710.00)	1,420.00	-52.99	7.86	-58.70	1.19	H	-52.03	68.91
	2,130.00	-46.50	9.49	-50.94	1.45	H	-42.90	59.78
	2,840.00	-57.58	10.90	-61.48	1.72	V	-52.30	69.18
23825 (713.50)	1,427.00	-52.36	7.90	-57.95	1.19	H	-51.24	68.12
	2,140.50	-47.48	9.42	-51.96	1.46	H	-44.00	60.88
	2,854.00	-59.25	10.95	-63.33	1.69	V	-54.07	70.95

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case
 5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

7.10.2 RADIATED SPURIOUS EMISSIONS (10 MHz Band 17 LTE)

- ☒ OPERATING FREQUENCY: 710.0 MHz
☒ MEASURED OUTPUT POWER: 16.52dBm = 0.045 W
☒ MODULATION SIGNAL: 10 MHz QPSK
☒ DISTANCE: 3 meters
☒ LIMIT: $43 + 10 \log_{10}(W) =$ 29.52dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	ERP (dBm)	dBc
23780 (709.00)	1,418.00	-52.35	7.85	-58.08	1.19	V	-51.42	67.94
	2,127.00	-40.34	9.51	-45.01	1.45	H	-36.95	53.47
	2,836.00	-58.61	10.88	-62.51	1.71	H	-53.34	69.86
23790 (710.00)	1,420.00	-51.17	7.86	-56.88	1.19	V	-50.21	66.73
	2,130.00	-40.26	9.49	-44.70	1.45	H	-36.66	53.18
	2,840.00	-59.34	10.90	-63.24	1.72	H	-54.06	70.58
23800 (711.00)	1,422.00	-52.72	7.87	-58.39	1.19	V	-51.71	68.23
	2,133.00	-40.13	9.47	-44.59	1.45	H	-36.57	53.09
	2,844.00	-57.21	10.92	-61.17	1.71	V	-51.96	68.48

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case
 5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

7.10.3 RADIATED SPURIOUS EMISSIONS (1.4 MHz Band 4 LTE)

- OPERATING FREQUENCY: 1710.70 MHz
- MEASURED OUTPUT POWER: 18.96dBm = 0.079 W
- MODULATION SIGNAL: 1.4 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 31.96dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
19957 (1710.7)	3,421.40	-47.70	12.36	-52.78	1.94	H	-42.36	61.32
	5,132.10	-55.25	12.34	-53.33	2.37	H	-43.36	62.32
	6,842.80	-52.61	12.17	-46.11	2.81	H	-36.75	55.71
20175 (1732.5)	3,465.00	-46.40	12.27	-50.96	1.87	H	-40.56	59.52
	5,197.50	-56.25	12.63	-54.70	2.45	H	-44.52	63.48
	6,930.00	-53.63	11.87	-46.03	2.84	H	-37.00	55.96
20393 (1754.3)	3,508.60	-50.21	12.15	-54.33	2.00	H	-44.18	63.14
	5,262.90	-56.29	12.91	-55.49	2.41	H	-44.99	63.95
	7,017.20	-51.82	11.57	-44.20	2.90	H	-35.53	54.49

NOTES: 1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method

according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:

- 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
- 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
- 4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
- 5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

7.10.4 RADIATED SPURIOUS EMISSIONS (3 MHz Band 4 LTE)

- ☒ OPERATING FREQUENCY: 1711.50 MHz
☒ MEASURED OUTPUT POWER: 18.94dBm = 0.078 W
☒ MODULATION SIGNAL: 3 MHz QPSK
☒ DISTANCE: 3 meters
☒ LIMIT: $43 + 10 \log_{10}(W) =$ 31.94dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
19965 (1711.5)	3,423.00	-47.59	12.35	-52.69	1.94	H	-42.28	61.22
	5,134.50	-59.42	12.35	-57.43	2.37	H	-47.45	66.39
	6,846.00	-52.28	12.16	-45.79	2.80	H	-36.43	55.37
20175 (1732.5)	3,465.00	-45.72	12.27	-50.28	1.87	H	-39.88	58.82
	5,197.50	-56.29	12.63	-54.74	2.45	H	-44.56	63.50
	6,930.00	-52.76	11.87	-45.16	2.84	H	-36.13	55.07
20385 (1753.5)	3,507.00	-50.61	12.15	-54.73	1.99	H	-44.57	63.51
	5,260.50	-55.24	12.90	-54.41	2.42	H	-43.93	62.87
	7,014.00	-51.50	11.59	-44.03	2.91	H	-35.35	54.29

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
 5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

7.10.5 RADIATED SPURIOUS EMISSIONS (5 MHz Band 4 LTE)

- OPERATING FREQUENCY: 1712.50 MHz
- MEASURED OUTPUT POWER: 19.03dBm = 0.080 W
- MODULATION SIGNAL: 5 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 32.03dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
19975 (1712.5)	3,425.00	-46.99	12.35	-52.13	1.95	H	-41.73	60.76
	5,137.50	-57.65	12.36	-55.57	2.38	H	-45.59	64.62
	6,850.00	-53.05	12.15	-46.57	2.80	H	-37.22	56.25
20175 (1732.5)	3,465.00	-46.08	12.27	-50.64	1.87	H	-40.24	59.27
	5,197.50	-59.35	12.63	-57.80	2.45	H	-47.62	66.65
	6,930.00	-53.30	11.87	-45.70	2.84	H	-36.67	55.70
20375 (1752.5)	3,505.00	-50.44	12.15	-54.57	1.98	H	-44.40	63.43
	5,257.50	-55.25	12.89	-54.42	2.41	H	-43.94	62.97
	7,010.00	-50.79	11.61	-43.51	2.91	H	-34.81	53.84

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
 5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

7.10.6 RADIATED SPURIOUS EMISSIONS (10 MHz Band 4 LTE)

- OPERATING FREQUENCY: 1715.00 MHz
- MEASURED OUTPUT POWER: 19.20dBm = 0.083 W
- MODULATION SIGNAL: 10 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 32.20dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20000 (1715.0)	3,430.00	-46.69	12.34	-51.92	1.95	H	-41.53	60.73
	5,145.00	-59.37	12.38	-57.33	2.39	H	-47.34	66.54
	6,860.00	-52.77	12.11	-46.33	2.81	H	-37.03	56.23
20175 (1732.5)	3,465.00	-46.47	12.27	-51.03	1.87	H	-40.63	59.83
	5,197.50	-58.91	12.63	-57.36	2.45	H	-47.18	66.38
	6,930.00	-53.21	11.87	-45.61	2.84	H	-36.58	55.78
20350 (1750.0)	3,500.00	-47.23	12.15	-51.38	1.95	H	-41.18	60.38
	5,250.00	-55.99	12.87	-55.15	2.39	H	-44.67	63.87
	7,000.00	-53.48	11.65	-46.81	2.85	H	-38.01	57.21

NOTES: 1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method

according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:

2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

7.10.7 RADIATED SPURIOUS EMISSIONS (15 MHz Band 4 LTE)

- OPERATING FREQUENCY: 1717.50 MHz
- MEASURED OUTPUT POWER: 19.30dBm = 0.085 W
- MODULATION SIGNAL: 15 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 32.30dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20025 (1717.5)	3,435.00	-46.50	12.34	-51.48	1.92	H	-41.06	60.36
	5,152.50	-60.12	12.40	-58.23	2.39	H	-48.22	67.52
	6,870.00	-52.63	12.08	-46.37	2.79	H	-37.08	56.38
20175 (1732.5)	3,465.00	-46.93	12.27	-51.49	1.87	H	-41.09	60.39
	5,197.50	-55.54	12.63	-53.99	2.45	H	-43.81	63.11
	6,930.00	-52.62	11.87	-45.02	2.84	H	-35.99	55.29
20325 (1747.5)	3,495.00	-45.74	12.17	-50.01	1.93	H	-39.77	59.07
	5,242.50	-56.35	12.83	-55.36	2.41	H	-44.94	64.24
	6,990.00	-53.41	11.68	-45.50	2.80	H	-36.62	55.92

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
 5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

7.10.8 RADIATED SPURIOUS EMISSIONS (20 MHz Band 4 LTE)

- OPERATING FREQUENCY: 1720.00 MHz
- MEASURED OUTPUT POWER: 19.28dBm = 0.085 W
- MODULATION SIGNAL: 20 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 32.28dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20050 (1720.0)	3,440.00	-45.11	12.33	-49.82	1.89	H	-39.38	58.66
	5,160.00	-55.27	12.44	-53.48	2.40	H	-43.44	62.72
	6,880.00	-51.48	12.04	-44.77	2.78	H	-35.51	54.79
20175 (1732.5)	3,465.00	-48.18	12.27	-52.74	1.87	H	-42.34	61.62
	5,197.50	-55.87	12.63	-54.32	2.45	H	-44.14	63.42
	6,930.00	-52.86	11.87	-45.26	2.84	H	-36.23	55.51
20300 (1745.0)	3,490.00	-45.67	12.18	-50.07	1.90	H	-39.79	59.07
	5,235.00	-54.80	12.80	-53.61	2.42	H	-43.23	62.51
	6,980.00	-53.88	11.71	-45.72	2.79	H	-36.80	56.08

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
 5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

7.11 RADIATED SPURIOUS EMISSIONS_With wireless charging pad(WCD-110)

7.11.1 RADIATED SPURIOUS EMISSIONS (5 MHz Band 17 LTE)

- OPERATING FREQUENCY: 706.5 MHz
- MEASURED OUTPUT POWER: 16.32dBm = 0.043 W
- MODULATION SIGNAL: 5 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 29.32 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	ERP (dBm)	dBc
23755 (706.50)	1,413.00	-54.70	7.82	-60.48	1.18	V	-53.84	70.16
	2,119.50	-46.89	9.55	-52.08	1.46	H	-43.99	60.31
	2,826.00	-59.08	10.84	-63.07	1.71	V	-53.94	70.26
23790 (710.00)	1,420.00	-52.61	7.86	-58.32	1.19	H	-51.65	67.97
	2,130.00	-47.11	9.49	-51.55	1.45	H	-43.51	59.83
	2,840.00	-57.25	10.90	-61.15	1.72	V	-51.97	68.29
23825 (713.50)	1,427.00	-51.11	7.90	-56.70	1.19	H	-49.99	66.31
	2,140.50	-46.70	9.42	-51.18	1.46	H	-43.22	59.54
	2,854.00	-56.64	10.95	-60.72	1.69	H	-51.46	67.78

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case
 5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

7.11.2 RADIATED SPURIOUS EMISSIONS (10 MHz Band 17 LTE)

- OPERATING FREQUENCY: 710.0 MHz
- MEASURED OUTPUT POWER: 16.57dBm = 0.045 W
- MODULATION SIGNAL: 10 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 29.57 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	ERP (dBm)	dBc
23780 (709.00)	1,418.00	-54.92	7.85	-60.65	1.19	V	-53.99	70.56
	2,127.00	-48.55	9.51	-53.22	1.45	H	-45.16	61.73
	2,836.00	-57.89	10.88	-61.79	1.71	H	-52.62	69.19
23790 (710.00)	1,420.00	-53.07	7.86	-58.78	1.19	V	-52.11	68.68
	2,130.00	-47.16	9.49	-51.60	1.45	H	-43.56	60.13
	2,840.00	-57.52	10.90	-61.42	1.72	H	-52.24	68.81
23800 (711.00)	1,422.00	-54.02	7.87	-59.69	1.19	V	-53.01	69.58
	2,133.00	-47.24	9.47	-51.70	1.45	H	-43.68	60.25
	2,844.00	-58.45	10.92	-62.41	1.71	V	-53.20	69.77

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case
 5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

7.11.3 RADIATED SPURIOUS EMISSIONS (1.4 MHz Band 4 LTE)

- OPERATING FREQUENCY: 1732.50 MHz
- MEASURED OUTPUT POWER: 16.61dBm = 0.046 W
- MODULATION SIGNAL: 1.4 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 29.61 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
19957 (1710.7)	3,421.40	-49.15	12.36	-54.23	1.94	H	-43.81	60.42
	5,132.10	-56.36	12.34	-54.44	2.37	H	-44.47	61.08
	6,842.80	-52.27	12.17	-45.77	2.81	H	-36.41	53.02
20175 (1732.5)	3,465.00	-48.89	12.27	-53.45	1.87	H	-43.05	59.66
	5,197.50	-54.80	12.63	-53.25	2.45	H	-43.07	59.68
	6,930.00	-53.85	11.87	-46.25	2.84	H	-37.22	53.83
20393 (1754.3)	3,508.60	-51.74	12.15	-55.86	2.00	H	-45.71	62.32
	5,262.90	-56.45	12.91	-55.65	2.41	H	-45.15	61.76
	7,017.20	-53.29	11.57	-45.67	2.90	H	-37.00	53.61

NOTES: 1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method

according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:

2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

7.11.4 RADIATED SPURIOUS EMISSIONS (3 MHz Band 4 LTE)

- OPERATING FREQUENCY: 1732.50 MHz
- MEASURED OUTPUT POWER: 16.60dBm = 0.046 W
- MODULATION SIGNAL: 3 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 29.60 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
19965 (1711.5)	3,423.00	-49.11	12.35	-54.21	1.94	H	-43.80	60.40
	5,134.50	-54.60	12.35	-52.61	2.37	H	-42.63	59.23
	6,846.00	-53.13	12.16	-46.64	2.80	H	-37.28	53.88
20175 (1732.5)	3,465.00	-50.02	12.27	-54.58	1.87	H	-44.18	60.78
	5,197.50	-57.26	12.63	-55.71	2.45	H	-45.53	62.13
	6,930.00	-54.24	11.87	-46.64	2.84	H	-37.61	54.21
20385 (1753.5)	3,507.00	-51.17	12.15	-55.29	1.99	H	-45.13	61.73
	5,260.50	-56.02	12.90	-55.19	2.42	H	-44.71	61.31
	7,014.00	-51.86	11.59	-44.39	2.91	H	-35.71	52.31

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
 5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

7.11.5 RADIATED SPURIOUS EMISSIONS (5 MHz Band 4 LTE)

- OPERATING FREQUENCY: 1732.50 MHz
- MEASURED OUTPUT POWER: 16.64dBm = 0.046 W
- MODULATION SIGNAL: 5 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 29.64 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
19975 (1712.5)	3,425.00	-47.66	12.35	-52.80	1.95	H	-42.40	59.04
	5,137.50	-56.51	12.36	-54.43	2.38	H	-44.45	61.09
	6,850.00	-53.27	12.15	-46.79	2.80	H	-37.44	54.08
20175 (1732.5)	3,465.00	-50.86	12.27	-55.42	1.87	H	-45.02	61.66
	5,197.50	-55.98	12.63	-54.43	2.45	H	-44.25	60.89
	6,930.00	-54.46	11.87	-46.86	2.84	H	-37.83	54.47
20375 (1752.5)	3,505.00	-49.23	12.15	-53.36	1.98	H	-43.19	59.83
	5,257.50	-54.13	12.89	-53.30	2.41	H	-42.82	59.46
	7,010.00	-52.35	11.61	-45.07	2.91	H	-36.37	53.01

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
 5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

7.11.6 RADIATED SPURIOUS EMISSIONS (10 MHz Band 4 LTE)

- OPERATING FREQUENCY: 1732.50 MHz
- MEASURED OUTPUT POWER: 16.63dBm = 0.046 W
- MODULATION SIGNAL: 10 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 29.63 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20000 (1715.0)	3,430.00	-47.03	12.34	-52.26	1.95	H	-41.87	58.50
	5,145.00	-55.30	12.38	-53.26	2.39	H	-43.27	59.90
	6,860.00	-52.99	12.11	-46.55	2.81	H	-37.25	53.88
20175 (1732.5)	3,465.00	-49.99	12.27	-54.55	1.87	H	-44.15	60.78
	5,197.50	-55.92	12.63	-54.37	2.45	H	-44.19	60.82
	6,930.00	-54.22	11.87	-46.62	2.84	H	-37.59	54.22
20350 (1750.0)	3,500.00	-48.32	12.15	-52.47	1.95	H	-42.27	58.90
	5,250.00	-52.82	12.87	-51.98	2.39	H	-41.50	58.13
	7,000.00	-53.86	11.65	-47.19	2.85	H	-38.39	55.02

NOTES: 1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method

according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:

2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

7.11.7 RADIATED SPURIOUS EMISSIONS (15 MHz Band 4 LTE)

- OPERATING FREQUENCY: 1732.50 MHz
- MEASURED OUTPUT POWER: 16.76dBm = 0.047 W
- MODULATION SIGNAL: 15 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 29.76 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20025 (1717.5)	3,435.00	-49.40	12.34	-54.38	1.92	H	-43.96	60.72
	5,152.50	-59.72	12.40	-57.83	2.39	H	-47.82	64.58
	6,870.00	-51.47	12.08	-45.21	2.79	H	-35.92	52.68
20175 (1732.5)	3,465.00	-50.05	12.27	-54.61	1.87	H	-44.21	60.97
	5,197.50	-55.35	12.63	-53.80	2.45	H	-43.62	60.38
	6,930.00	-53.63	11.87	-46.03	2.84	H	-37.00	53.76
20325 (1747.5)	3,495.00	-48.05	12.17	-52.32	1.93	H	-42.08	58.84
	5,242.50	-54.78	12.83	-53.79	2.41	H	-43.37	60.13
	6,990.00	-54.03	11.68	-46.12	2.80	H	-37.24	54.00

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
 5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

7.11.8 RADIATED SPURIOUS EMISSIONS (20 MHz Band 4 LTE)

- OPERATING FREQUENCY: 1732.50 MHz
- MEASURED OUTPUT POWER: 16.85dBm = 0.048 W
- MODULATION SIGNAL: 20 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 29.85 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20050 (1720.0)	3,440.00	-48.05	12.33	-52.76	1.89	H	-42.32	59.17
	5,160.00	-54.78	12.44	-52.99	2.40	H	-42.95	59.80
	6,880.00	-54.03	12.04	-47.32	2.78	H	-38.06	54.91
20175 (1732.5)	3,465.00	-49.77	12.27	-54.33	1.87	H	-43.93	60.78
	5,197.50	-54.27	12.63	-52.72	2.45	H	-42.54	59.39
	6,930.00	-54.21	11.87	-46.61	2.84	H	-37.58	54.43
20300 (1745.0)	3,490.00	-47.90	12.18	-52.30	1.90	H	-42.02	58.87
	5,235.00	-55.04	12.80	-53.85	2.42	H	-43.47	60.32
	6,980.00	-54.05	11.71	-45.89	2.79	H	-36.97	53.82

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
 5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

7.12 RADIATED SPURIOUS EMISSIONS_With wireless charging pad(CT 06801)

7.12.1 RADIATED SPURIOUS EMISSIONS (5 MHz Band 17 LTE)

- OPERATING FREQUENCY: 713.5 MHz
- MEASURED OUTPUT POWER: 15.42dBm = 0.035 W
- MODULATION SIGNAL: 5 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 28.42 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	ERP (dBm)	dBc
23755 (706.50)	1,413.00	-52.25	7.82	-58.03	1.18	H	-51.39	66.81
	2,119.50	-44.36	9.55	-49.55	1.46	H	-41.46	56.88
	2,826.00	-58.82	10.84	-62.81	1.71	H	-53.68	69.10
23790 (710.00)	1,420.00	-50.58	7.86	-56.29	1.19	H	-49.62	65.04
	2,130.00	-47.26	9.49	-51.70	1.45	H	-43.66	59.08
	2,840.00	-58.21	10.90	-62.11	1.72	H	-52.93	68.35
23825 (713.50)	1,427.00	-50.18	7.90	-55.77	1.19	H	-49.06	64.48
	2,140.50	-44.82	9.42	-49.30	1.46	H	-41.34	56.76
	2,854.00	-58.22	10.95	-62.30	1.69	H	-53.04	68.46

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case
 5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

7.12.2 RADIATED SPURIOUS EMISSIONS (10 MHz Band 17 LTE)

- ☒ OPERATING FREQUENCY: 711.0 MHz
☒ MEASURED OUTPUT POWER: 14.75dBm = 0.030 W
☒ MODULATION SIGNAL: 10 MHz QPSK
☒ DISTANCE: 3 meters
☒ LIMIT: $43 + 10 \log_{10}(W) =$ 27.75 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBd)	Substitute Level (dBm)	C.L	Pol	ERP (dBm)	dBc
23780 (709.00)	1,418.00	-53.32	7.85	-59.05	1.19	H	-52.39	67.14
	2,127.00	-48.45	9.51	-53.12	1.45	H	-45.06	59.81
	2,836.00	-57.64	10.88	-61.54	1.71	H	-52.37	67.12
23790 (710.00)	1,420.00	-53.40	7.86	-59.11	1.19	H	-52.44	67.19
	2,130.00	-48.39	9.49	-52.83	1.45	H	-44.79	59.54
	2,840.00	-56.86	10.90	-60.76	1.72	H	-51.58	66.33
23800 (711.00)	1,422.00	-51.80	7.87	-57.47	1.19	H	-50.79	65.54
	2,133.00	-47.67	9.47	-52.13	1.45	H	-44.11	58.86
	2,844.00	-58.41	10.92	-62.37	1.71	H	-53.16	67.91

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. All of RB size has been tested for emissions and ERP, with the 1RB configuration observed as the worst case
 5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

7.12.3 RADIATED SPURIOUS EMISSIONS (1.4 MHz Band 4 LTE)

- OPERATING FREQUENCY: 1710.70 MHz
- MEASURED OUTPUT POWER: 18.09dBm = 0.064 W
- MODULATION SIGNAL: 1.4 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 31.09 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
19957 (1710.7)	3,421.40	-46.06	12.36	-51.14	1.94	H	-40.72	58.81
	5,132.10	-56.45	12.34	-54.53	2.37	V	-44.56	62.65
	6,842.80	-53.01	12.17	-46.51	2.81	V	-37.15	55.24
20175 (1732.5)	3,465.00	-46.30	12.27	-50.86	1.87	H	-40.46	58.55
	5,197.50	-56.17	12.63	-54.62	2.45	V	-44.44	62.53
	6,930.00	-54.80	11.87	-47.20	2.84	V	-38.17	56.26
20393 (1754.3)	3,508.60	-51.47	12.15	-55.59	2.00	H	-45.44	63.53
	5,262.90	-57.79	12.91	-56.99	2.41	V	-46.49	64.58
	7,017.20	-54.05	11.57	-46.43	2.90	V	-37.76	55.85

NOTES: 1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method

according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:

2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

7.12.4 RADIATED SPURIOUS EMISSIONS (3 MHz Band 4 LTE)

- OPERATING FREQUENCY: 1711.50 MHz
- MEASURED OUTPUT POWER: 18.06dBm = 0.064 W
- MODULATION SIGNAL: 3 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 31.06 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
19965 (1711.5)	3,423.00	-47.27	12.35	-52.37	1.94	H	-41.96	60.02
	5,134.50	-54.79	12.35	-52.80	2.37	V	-42.82	60.88
	6,846.00	-53.57	12.16	-47.08	2.80	V	-37.72	55.78
20175 (1732.5)	3,465.00	-46.81	12.27	-51.37	1.87	H	-40.97	59.03
	5,197.50	-53.26	12.63	-51.71	2.45	H	-41.53	59.59
	6,930.00	-53.45	11.87	-45.85	2.84	V	-36.82	54.88
20385 (1753.5)	3,507.00	-50.92	12.15	-55.04	1.99	H	-44.88	62.94
	5,260.50	-54.10	12.90	-53.27	2.42	H	-42.79	60.85
	7,014.00	-52.46	11.59	-44.99	2.91	V	-36.31	54.37

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
 5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

7.12.5 RADIATED SPURIOUS EMISSIONS (5 MHz Band 4 LTE)

- OPERATING FREQUENCY: 1712.50 MHz
- MEASURED OUTPUT POWER: 18.33dBm = 0.068 W
- MODULATION SIGNAL: 5 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 31.33 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
19975 (1712.5)	3,425.00	-48.60	12.35	-53.74	1.95	H	-43.34	61.67
	5,137.50	-52.95	12.36	-50.87	2.38	H	-40.89	59.22
	6,850.00	-53.66	12.15	-47.18	2.80	V	-37.83	56.16
20175 (1732.5)	3,465.00	-47.03	12.27	-51.59	1.87	H	-41.19	59.52
	5,197.50	-53.87	12.63	-52.32	2.45	H	-42.14	60.47
	6,930.00	-54.96	11.87	-47.36	2.84	V	-38.33	56.66
20375 (1752.5)	3,505.00	-50.69	12.15	-54.82	1.98	H	-44.65	62.98
	5,257.50	-54.69	12.89	-53.86	2.41	H	-43.38	61.71
	7,010.00	-52.79	11.61	-45.51	2.91	V	-36.81	55.14

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
 5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

7.12.6 RADIATED SPURIOUS EMISSIONS (10 MHz Band 4 LTE)

- OPERATING FREQUENCY: 1715.00 MHz
- MEASURED OUTPUT POWER: 18.23dBm = 0.067 W
- MODULATION SIGNAL: 10 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 31.23 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20000 (1715.0)	3,430.00	-48.38	12.34	-53.61	1.95	H	-43.22	61.45
	5,145.00	-54.00	12.38	-51.96	2.39	H	-41.97	60.20
	6,860.00	-54.06	12.11	-47.62	2.81	V	-38.32	56.55
20175 (1732.5)	3,465.00	-47.96	12.27	-52.52	1.87	H	-42.12	60.35
	5,197.50	-55.11	12.63	-53.56	2.45	H	-43.38	61.61
	6,930.00	-54.53	11.87	-46.93	2.84	V	-37.90	56.13
20350 (1750.0)	3,500.00	-47.73	12.15	-51.88	1.95	H	-41.68	59.91
	5,250.00	-53.10	12.87	-52.26	2.39	H	-41.78	60.01
	7,000.00	-53.99	11.65	-47.32	2.85	V	-38.52	56.75

NOTES: 1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method

according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:

2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.

4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case

5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

7.12.7 RADIATED SPURIOUS EMISSIONS (15 MHz Band 4 LTE)

- ☒ OPERATING FREQUENCY: 1717.50 MHz
☒ MEASURED OUTPUT POWER: 18.39dBm = 0.069 W
☒ MODULATION SIGNAL: 15 MHz QPSK
☒ DISTANCE: 3 meters
☒ LIMIT: $43 + 10 \log_{10}(W) =$ 31.39 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20025 (1717.5)	3,435.00	-46.61	12.34	-51.59	1.92	H	-41.17	59.56
	5,152.50	-54.67	12.40	-52.78	2.39	H	-42.77	61.16
	6,870.00	-52.53	12.08	-46.27	2.79	V	-36.98	55.37
20175 (1732.5)	3,465.00	-48.73	12.27	-53.29	1.87	H	-42.89	61.28
	5,197.50	-54.42	12.63	-52.87	2.45	H	-42.69	61.08
	6,930.00	-54.97	11.87	-47.37	2.84	V	-38.34	56.73
20325 (1747.5)	3,495.00	-47.08	12.17	-51.35	1.93	H	-41.11	59.50
	5,242.50	-53.61	12.83	-52.62	2.41	H	-42.20	60.59
	6,990.00	-54.42	11.68	-46.51	2.80	V	-37.63	56.02

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
 5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

7.12.8 RADIATED SPURIOUS EMISSIONS (20 MHz Band 4 LTE)

- OPERATING FREQUENCY: 1720.00 MHz
- MEASURED OUTPUT POWER: 18.33dBm = 0.068 W
- MODULATION SIGNAL: 20 MHz QPSK
- DISTANCE: 3 meters
- LIMIT: $43 + 10 \log_{10}(W) =$ 31.33 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc
20050 (1720.0)	3,440.00	-46.81	12.33	-51.52	1.89	H	-41.08	59.41
	5,160.00	-54.89	12.44	-53.10	2.40	V	-43.06	61.39
	6,880.00	-53.90	12.04	-47.19	2.78	V	-37.93	56.26
20175 (1732.5)	3,465.00	-48.86	12.27	-53.42	1.87	H	-43.02	61.35
	5,197.50	-54.91	12.63	-53.36	2.45	H	-43.18	61.51
	6,930.00	-54.84	11.87	-47.24	2.84	V	-38.21	56.54
20300 (1745.0)	3,490.00	-49.34	12.18	-53.74	1.90	H	-43.46	61.79
	5,235.00	-57.06	12.80	-55.87	2.42	H	-45.49	63.82
	6,980.00	-56.26	11.71	-48.10	2.79	V	-39.18	57.51

- NOTES:**
1. Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA/EIA-603-D-2010 June 24, 2010:
 2. We are performed all frequency to 10th harmonics from 30 MHz. Measurements above show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
 3. we have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
 4. All of RB size has been tested for emissions and EIRP, with the 1RB configuration observed as the worst case
 5. We are performed 16QAM and QPSK modulations. The worst case data are reported in the table above.

7.13 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
Band 4	1.4 MHz	1732.5	QPSK	6	0	4.16
			16-QAM	6		5.03
	3 MHz		QPSK	15		4.51
			16-QAM	15		5.41
	5 MHz		QPSK	25		4.47
			16-QAM	25		5.31
	10 MHz		QPSK	50		4.58
			16-QAM	50		5.45
	15 MHz		QPSK	75		4.30
			16-QAM	75		5.33
	20 MHz		QPSK	100		4.51
			16-QAM	100		5.51

- Plots of the EUT's Peak- to- Average Ratio are shown Page 97~ 102.

7.14 OCCUPIED BANDWIDTH

Band	Band Width (MHz)	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)	
Band 17	5	710.0	QPSK	25	0	4.5061	
			16-QAM	25		4.4964	
	10		QPSK	50		8.9675	
			16-QAM	50		8.9459	

Band	Band Width (MHz)	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
Band 4	1.4	1732.5	QPSK	6	0	1.0929
			16-QAM	6		1.0960
	3		QPSK	15		2.6978
			16-QAM	15		2.7013
	5		QPSK	25		4.4994
			16-QAM	25		4.4956
	10		QPSK	50		8.9943
			16-QAM	50		8.9606
	15		QPSK	75		13.5010
			16-QAM	75		13.4820
	20		QPSK	100		17.9510
			16-QAM	100		18.0020

- Plots of the EUT's Occupied Bandwidth are shown Page 89 ~ 96.

7.15 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Frequency of Maximum Harmonic (GHz)	Maximum Data [dBm]
Band 17	5	706.5	QPSK	1	0	3.224716	-31.73
		710.0				9.371000	-31.50
		713.5				3.191417	-29.68
	10	709.0				3.138238	-31.16
		710.0				3.153645	-31.88
		711.0				2.684974	-31.48

Band	Band Width (MHz)	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Frequency of Maximum Harmonic (GHz)	Maximum Data [dBm]
Band 4	1.4	1710.7	QPSK	1	0	15.8820	-28.39
		1732.5				15.7115	-27.68
		1754.3				16.9655	-28.39
	3	1711.5				19.1925	-28.20
		1732.5				16.7490	-28.14
		1753.5				16.3135	-28.21
	5	1712.5				16.3120	-28.09
		1732.5				16.4865	-27.86
		1752.5				18.9730	-27.13
		1715.0				19.0235	-27.50
	10	1732.5				16.3885	-27.75
		1750.0				16.5080	-26.98
		1717.5				16.7650	-28.58
	15	1732.5				17.0160	-28.28
		1747.5				18.9430	-27.45
		1720.0				19.0505	-28.35
	20	1732.5				18.9630	-27.76
		1745.0				17.0170	-28.26

- Plots of the EUT's Conducted Spurious Emissions are shown Page 127 ~150.

7.15.1 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 103 ~ 126.

7.16 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

7.16.1 FREQUENCY STABILITY (5 MHz Band 17 LTE)


■ OPERATING FREQUENCY: 710,000,000 Hz

■ CHANNEL: 23790 (5 MHz)

■ REFERENCE VOLTAGE: 3.85 VDC

■ DEVIATION LIMIT: -

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	710 000 002	0.0	0.000 000	0.000
100%		-30	710 000 006	3.6	0.000 001	0.005
100%		-20	710 000 004	2.1	0.000 000	0.003
100%		-10	709 999 999	-3.4	0.000 000	-0.005
100%		0	710 000 000	-2.6	0.000 000	-0.004
100%		+10	710 000 000	-2.1	0.000 000	-0.003
100%		+30	710 000 000	-1.9	0.000 000	-0.003
100%		+40	709 999 999	-2.8	0.000 000	-0.004
100%		+50	710 000 000	-2.5	0.000 000	-0.004
Batt. Endpoint	3.27	+20	710 000 004	2.2	0.000 000	0.003

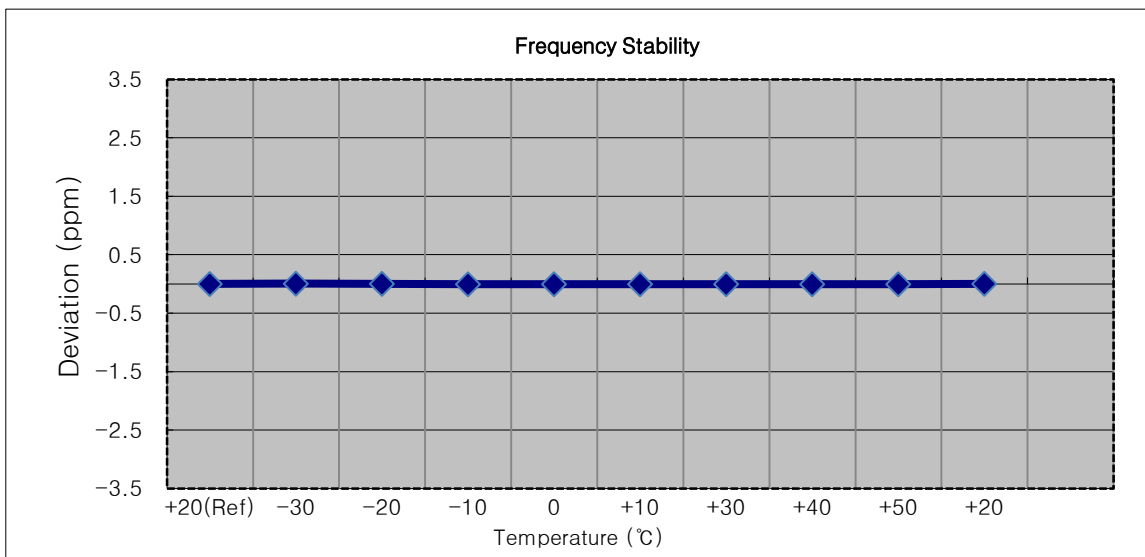

7.16.2 FREQUENCY STABILITY (10 MHz Band 17 LTE)


■ OPERATING FREQUENCY: 710,000,000 Hz

■ CHANNEL: 23790 (10 MHz)

■ REFERENCE VOLTAGE: 3.85 VDC

■ DEVIATION LIMIT: -

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	709 999 999	0.0	0.000 000	0.000
100%		-30	710 000 000	1.0	0.000 000	0.001
100%		-20	710 000 002	3.1	0.000 000	0.004
100%		-10	709 999 997	-1.9	0.000 000	-0.003
100%		0	710 000 002	3.6	0.000 001	0.005
100%		+10	710 000 001	2.8	0.000 000	0.004
100%		+30	709 999 995	-3.3	0.000 000	-0.005
100%		+40	710 000 003	4.3	0.000 001	0.006
100%		+50	710 000 001	2.1	0.000 000	0.003
Batt. Endpoint	3.27	+20	710 000 000	1.8	0.000 000	0.003

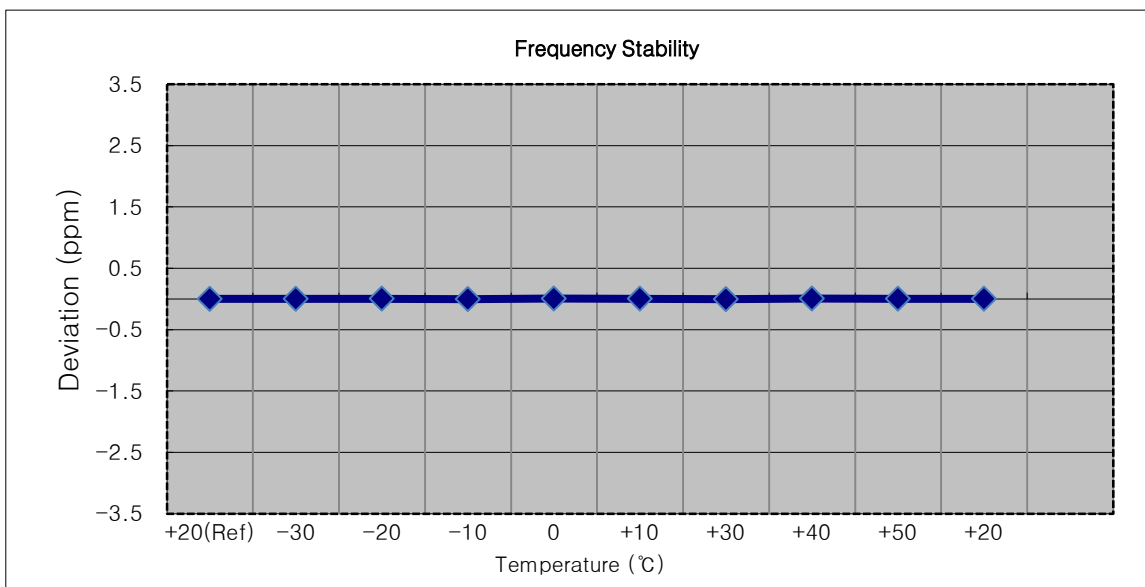

7.16.3 FREQUENCY STABILITY (1.4 MHz Band 4 LTE)


■ OPERATING FREQUENCY: 1732,500,000 Hz

■ CHANNEL: 20175 (1.4 MHz)

■ REFERENCE VOLTAGE: 3.85 VDC

■ DEVIATION LIMIT: -

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	1732 499 995	0.0	0.000 000	0.000
100%		-30	1732 499 986	-8.6	0.000 000	-0.005
100%		-20	1732 500 002	7.6	0.000 000	0.004
100%		-10	1732 499 989	-5.2	0.000 000	-0.003
100%		0	1732 499 987	-7.3	0.000 000	-0.004
100%		+10	1732 499 988	-6.8	0.000 000	-0.004
100%		+30	1732 499 999	4.7	0.000 000	0.003
100%		+40	1732 499 999	4.7	0.000 000	0.003
100%		+50	1732 499 988	-6.6	0.000 000	-0.004
Batt. Endpoint	3.27	+20	1732 499 990	-4.2	0.000 000	-0.002

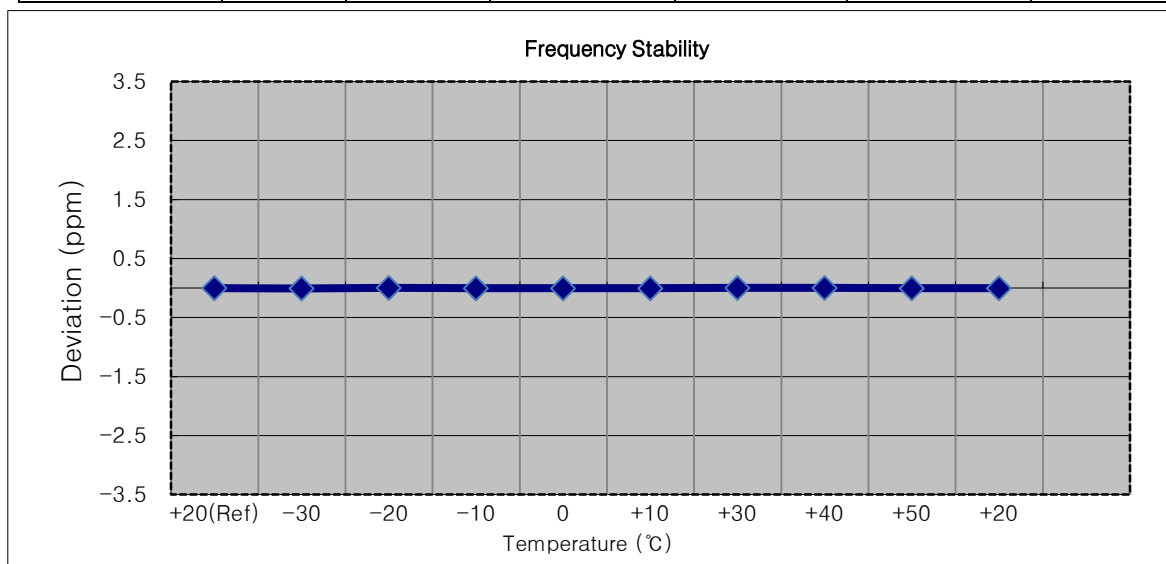

7.16.4 FREQUENCY STABILITY (3 MHz Band 4 LTE)


■ OPERATING FREQUENCY: 1732,500,000 Hz

■ CHANNEL: 20175 (3 MHz)

■ REFERENCE VOLTAGE: 3.85 VDC

■ DEVIATION LIMIT: -

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	1732 500 004	0.0	0.000 000	0.000
100%		-30	1732 499 998	-5.9	0.000 000	-0.003
100%		-20	1732 500 000	-4.3	0.000 000	-0.002
100%		-10	1732 500 009	5.1	0.000 000	0.003
100%		0	1732 500 009	4.6	0.000 000	0.003
100%		+10	1732 500 009	5.0	0.000 000	0.003
100%		+30	1732 499 997	-7.0	0.000 000	-0.004
100%		+40	1732 499 998	-6.4	0.000 000	-0.004
100%		+50	1732 500 007	3.1	0.000 000	0.002
Batt. Endpoint	3.27	+20	1732 500 014	9.6	0.000 001	0.006

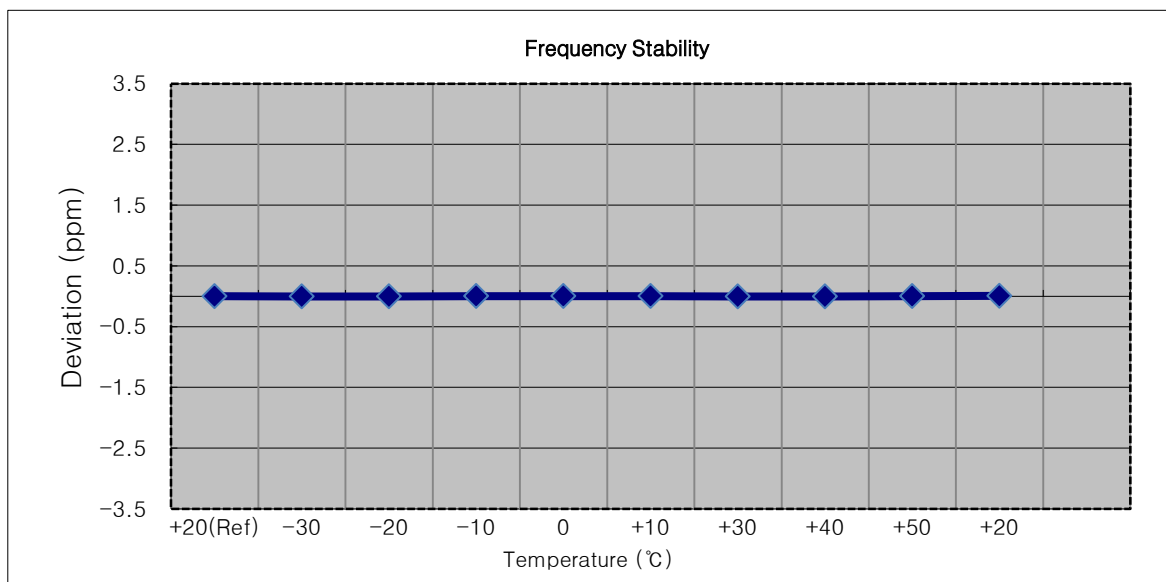

7.16.5 FREQUENCY STABILITY (5 MHz Band 4 LTE)


■ OPERATING FREQUENCY: 1732,500,000 Hz

■ CHANNEL: 20175 (5 MHz)

■ REFERENCE VOLTAGE: 3.85 VDC

■ DEVIATION LIMIT: -

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	1732 500 002	0.0	0.000 000	0.000
100%		-30	1732 499 998	-3.8	0.000 000	-0.002
100%		-20	1732 500 000	-2.6	0.000 000	-0.002
100%		-10	1732 500 005	2.8	0.000 000	0.002
100%		0	1732 499 999	-2.9	0.000 000	-0.002
100%		+10	1732 499 995	-6.8	0.000 000	-0.004
100%		+30	1732 500 006	3.5	0.000 000	0.002
100%		+40	1732 499 997	-5.1	0.000 000	-0.003
100%		+50	1732 499 995	-6.8	0.000 000	-0.004
Batt. Endpoint	3.27	+20	1732 500 008	6.1	0.000 000	0.004

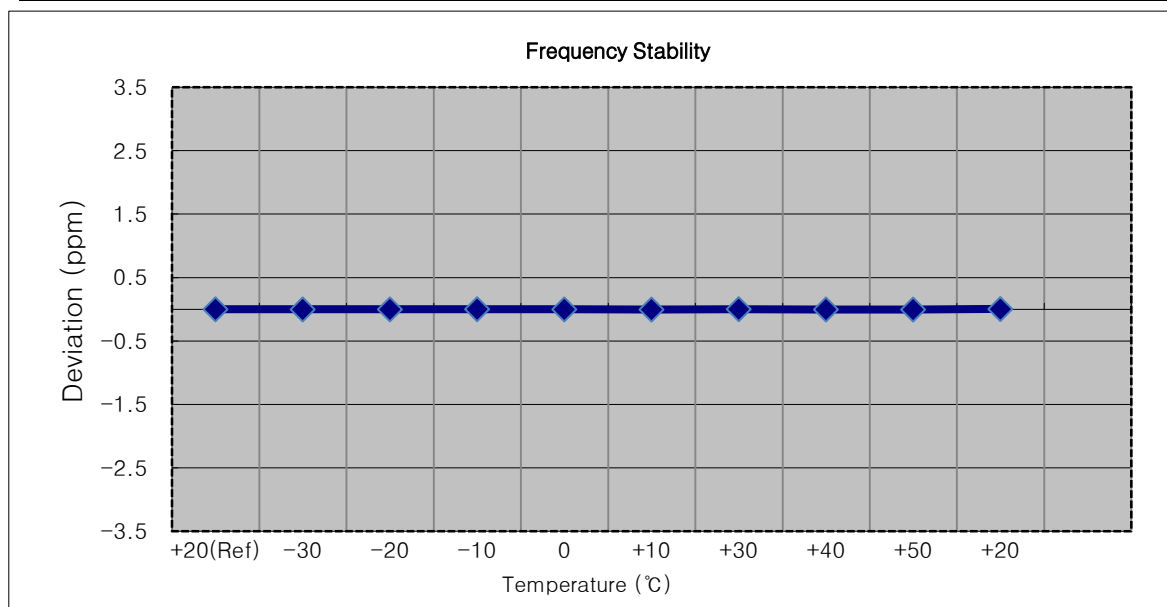

7.16.6 FREQUENCY STABILITY (10 MHz Band 4 LTE)


■ OPERATING FREQUENCY: 1732,500,000 Hz

■ CHANNEL: 20175 (10 MHz)

■ REFERENCE VOLTAGE: 3.85 VDC

■ DEVIATION LIMIT: -

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	1732 499 995	0.0	0.000 000	0.000
100%		-30	1732 499 999	3.7	0.000 000	0.002
100%		-20	1732 500 000	4.6	0.000 000	0.003
100%		-10	1732 500 002	6.5	0.000 000	0.004
100%		0	1732 499 997	2.1	0.000 000	0.001
100%		+10	1732 499 989	-6.3	0.000 000	-0.004
100%		+30	1732 499 989	-5.9	0.000 000	-0.003
100%		+40	1732 499 994	-1.4	0.000 000	-0.001
100%		+50	1732 499 992	-3.5	0.000 000	-0.002
Batt. Endpoint	3.27	+20	1732 500 003	8.3	0.000 000	0.005

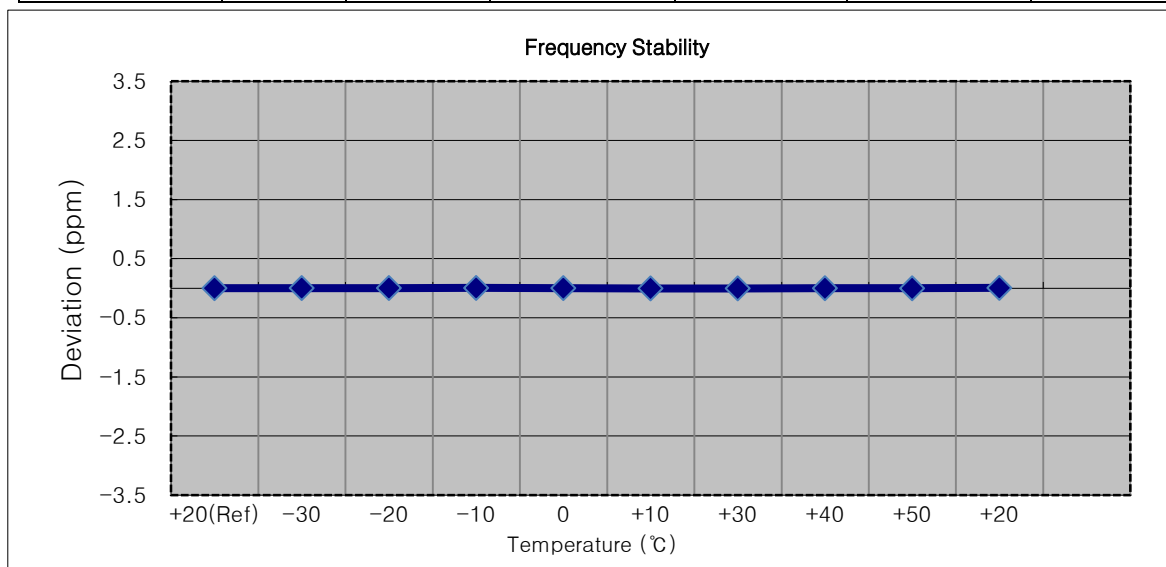

7.16.7 FREQUENCY STABILITY (15 MHz Band 4 LTE)


■ OPERATING FREQUENCY: 1732,500,000 Hz

■ CHANNEL: 20175 (15 MHz)

■ REFERENCE VOLTAGE: 3.85 VDC

■ DEVIATION LIMIT: -

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	1732 499 995	0.0	0.000 000	0.000
100%		-30	1732 500 002	6.7	0.000 000	0.004
100%		-20	1732 500 003	8.1	0.000 000	0.005
100%		-10	1732 500 000	4.4	0.000 000	0.003
100%		0	1732 500 001	6.0	0.000 000	0.003
100%		+10	1732 500 002	6.7	0.000 000	0.004
100%		+30	1732 500 000	4.5	0.000 000	0.003
100%		+40	1732 499 999	3.5	0.000 000	0.002
100%		+50	1732 500 000	5.1	0.000 000	0.003
Batt. Endpoint	3.27	+20	1732 500 000	5.0	0.000 000	0.003

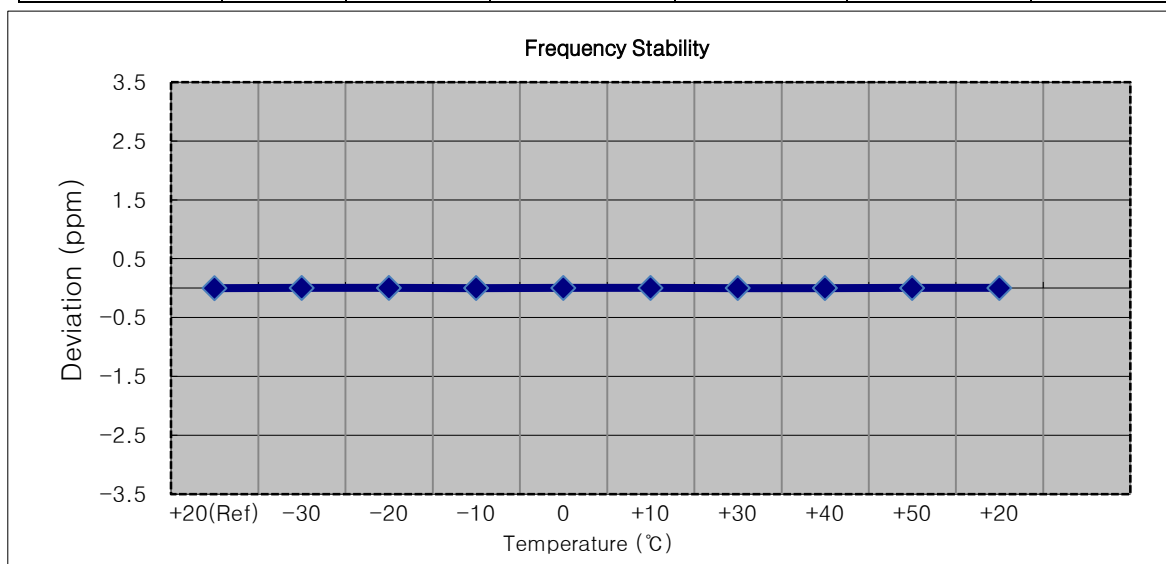

7.16.8 FREQUENCY STABILITY (20 MHz Band 4 LTE)


■ OPERATING FREQUENCY: 1732,500,000 Hz

■ CHANNEL: 20175 (20 MHz)

■ REFERENCE VOLTAGE: 3.85 VDC


■ DEVIATION LIMIT: -

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	1732 500 009	0.0	0.000 000	0.000
100%		-30	1732 500 003	-5.9	0.000 000	-0.003
100%		-20	1732 500 005	-4.0	0.000 000	-0.002
100%		-10	1732 500 015	5.9	0.000 000	0.003
100%		0	1732 500 004	-5.7	0.000 000	-0.003
100%		+10	1732 500 013	3.5	0.000 000	0.002
100%		+30	1732 500 014	5.1	0.000 000	0.003
100%		+40	1732 500 013	3.9	0.000 000	0.002
100%		+50	1732 500 014	4.8	0.000 000	0.003
Batt. Endpoint	3.27	+20	1732 500 006	-3.7	0.000 000	-0.002

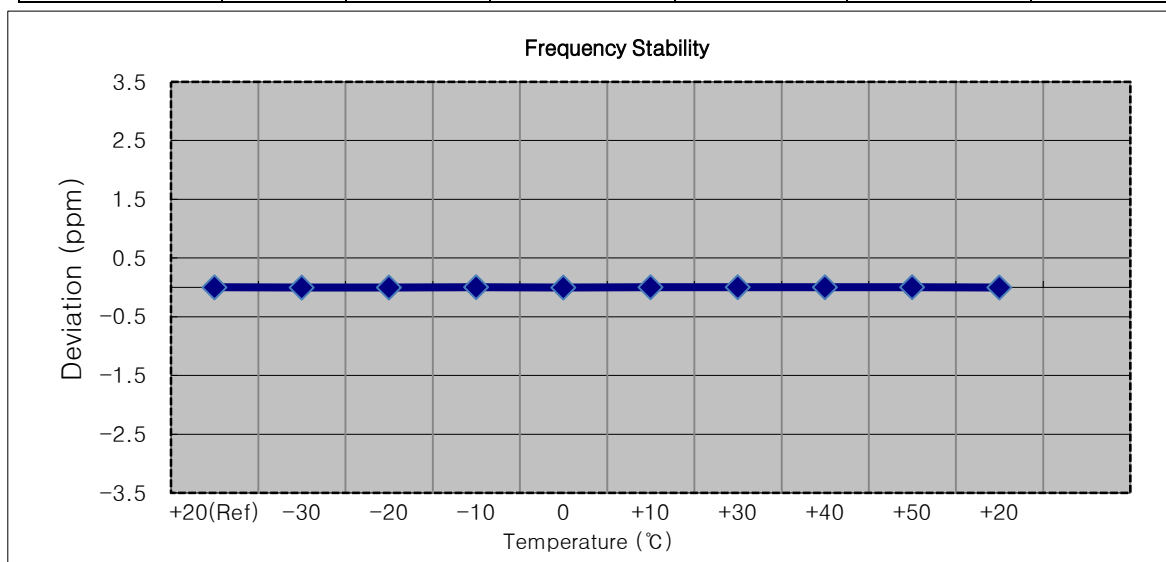


8. TEST PLOTS


BAND 17. Occupied Bandwidth Plot (5M BW Ch.23790 QPSK RB 25)

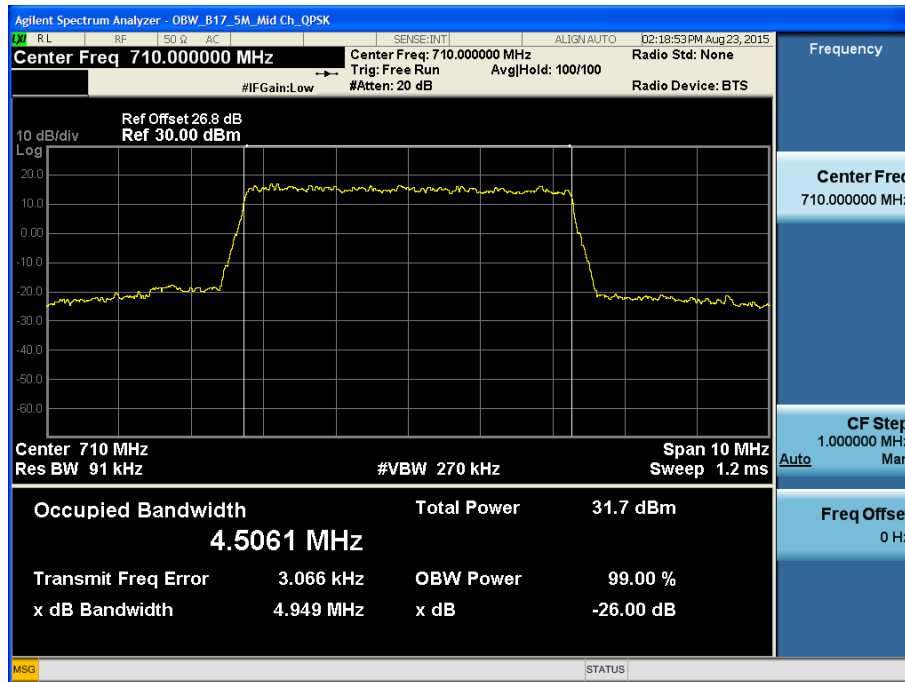


BAND 17. Occupied Bandwidth Plot (5M BW Ch.23790 16QAM RB 25)

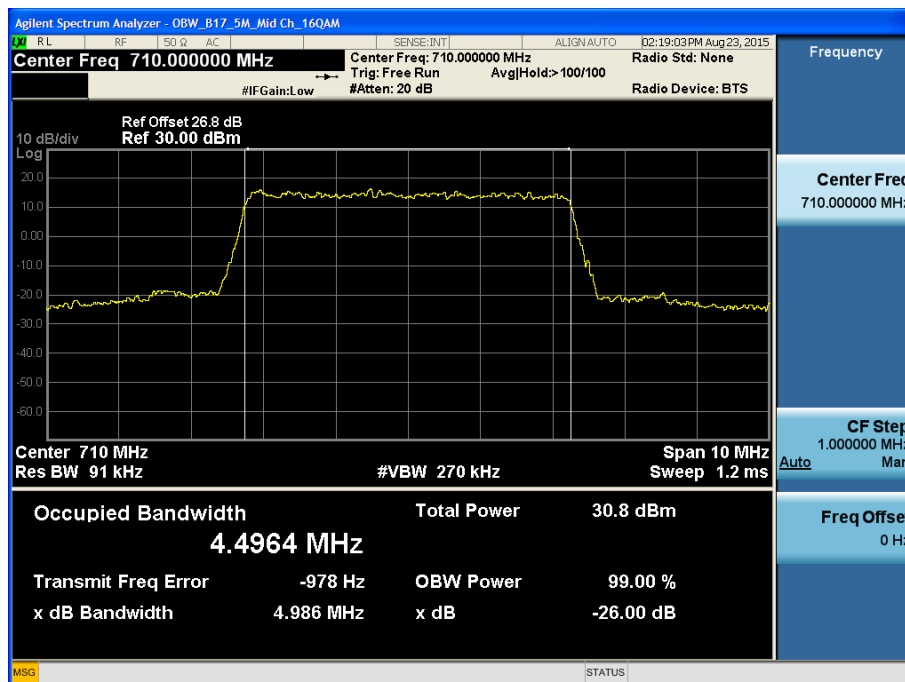


BAND 17. Occupied Bandwidth Plot (10M BW Ch.23790 QPSK RB 50)

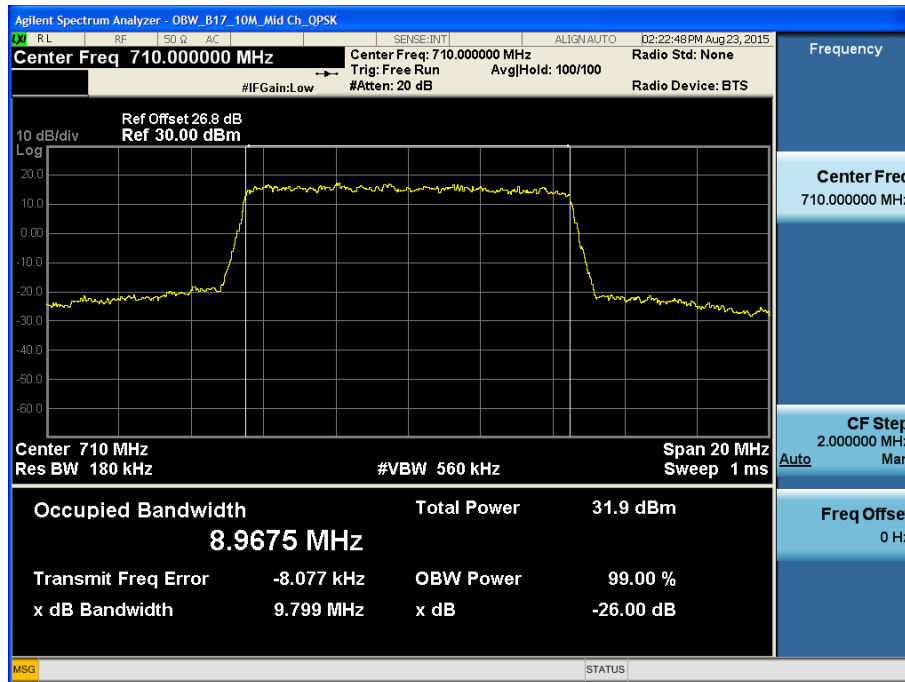


BAND 17. Occupied Bandwidth Plot (10M BW Ch.23790 16QAMRB 50)

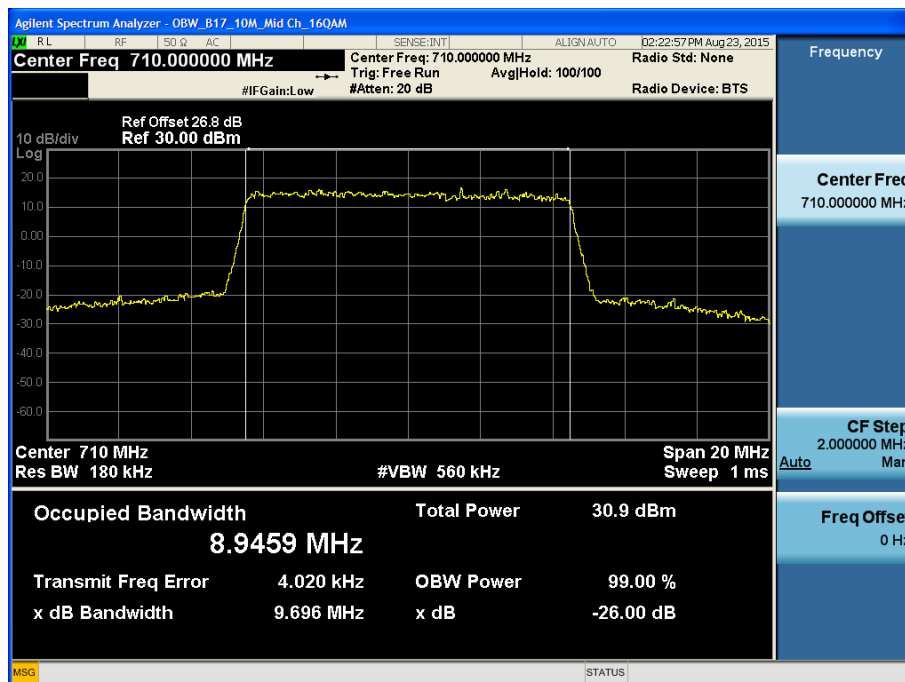


BAND 4. Occupied Bandwidth Plot (1.4M BW Ch.20175 QPSK RB 6)

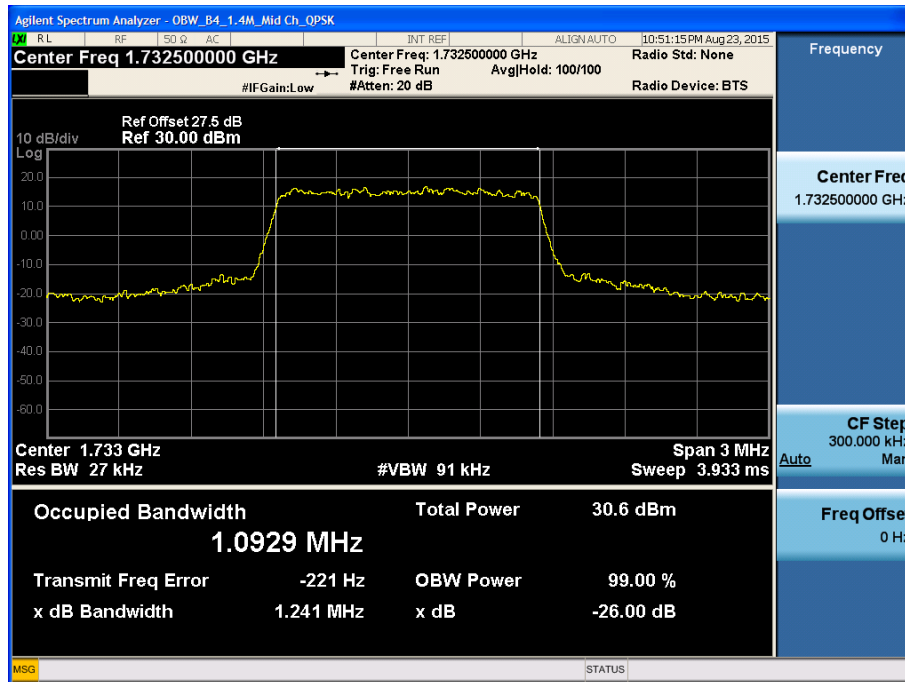


BAND 4. Occupied Bandwidth Plot (1.4M BW Ch.20175 16QAM RB 6)

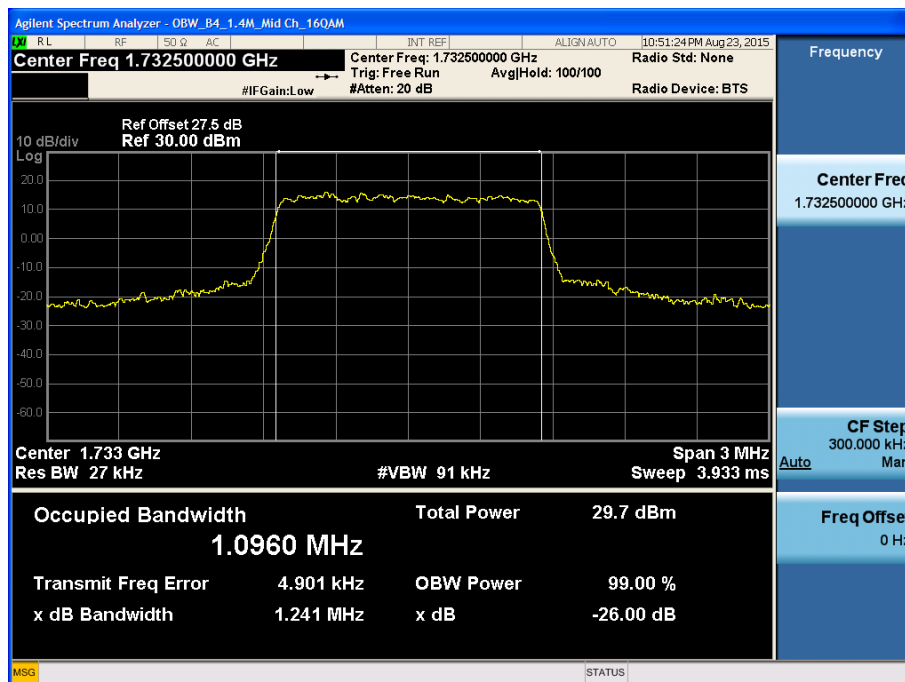


BAND 4. Occupied Bandwidth Plot (3M BW Ch.20175 QPSK RB 15)

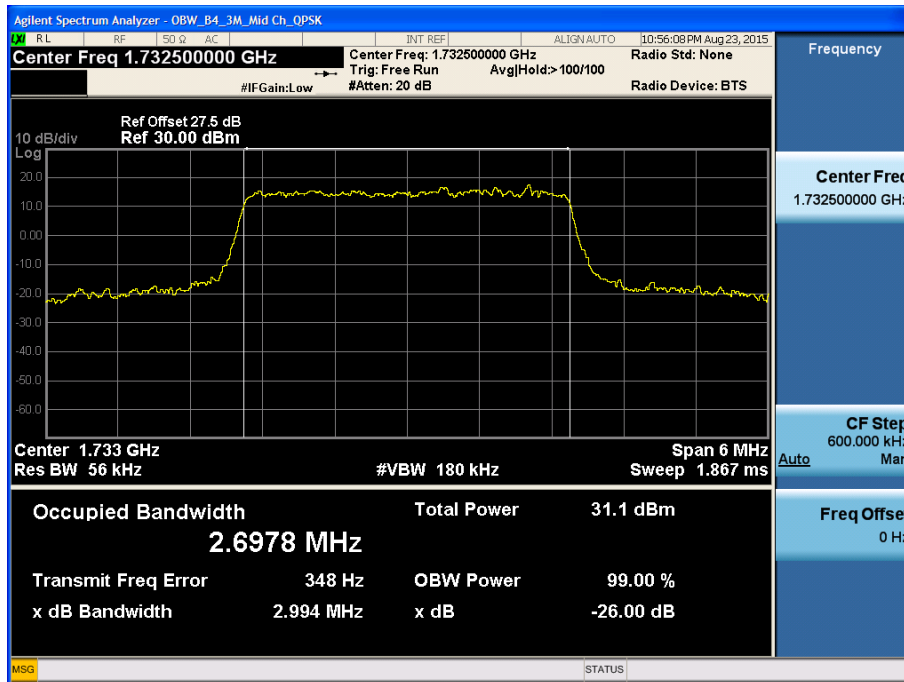


BAND 4. Occupied Bandwidth Plot (3M BW Ch.20175 16QAM RB 15)

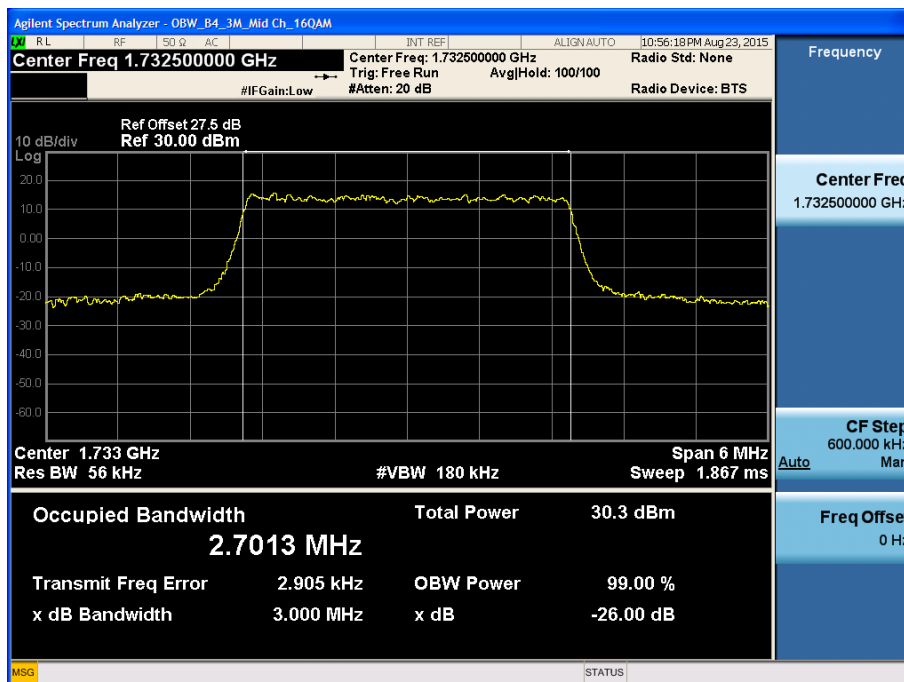


BAND 4. Occupied Bandwidth Plot (5M BW Ch.20175 QPSK RB 25)

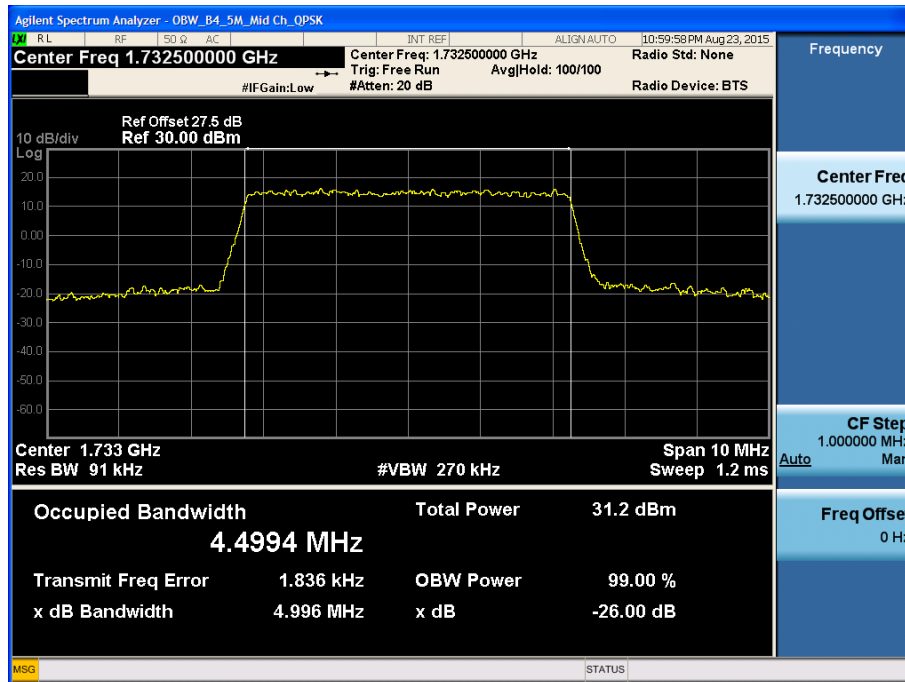


BAND 4. Occupied Bandwidth Plot (5M BW Ch.20175 16QAM RB 25)

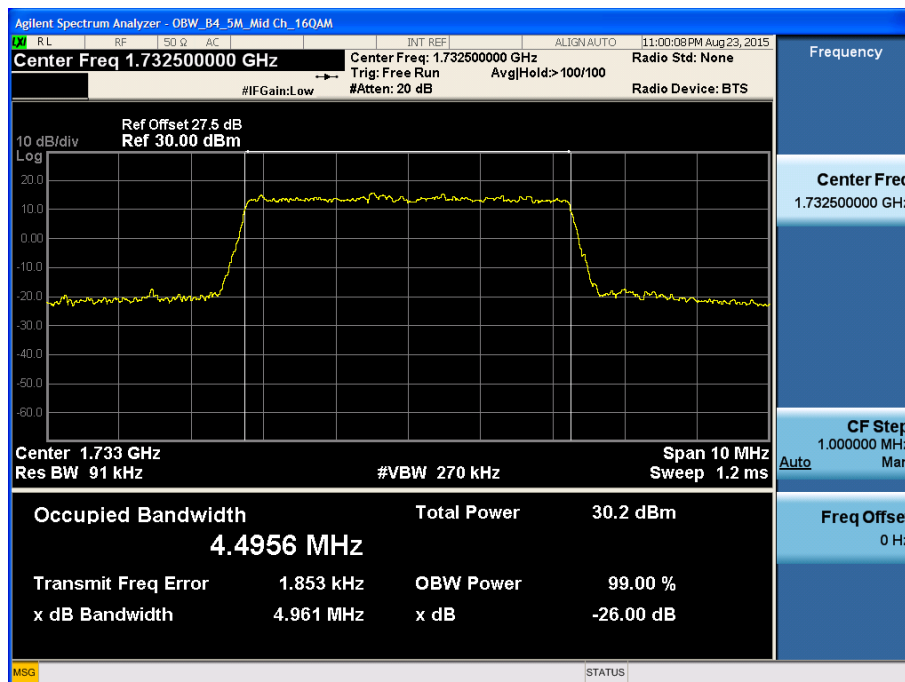


BAND 4. Occupied Bandwidth Plot (10M BW Ch.20175 QPSK RB 50)

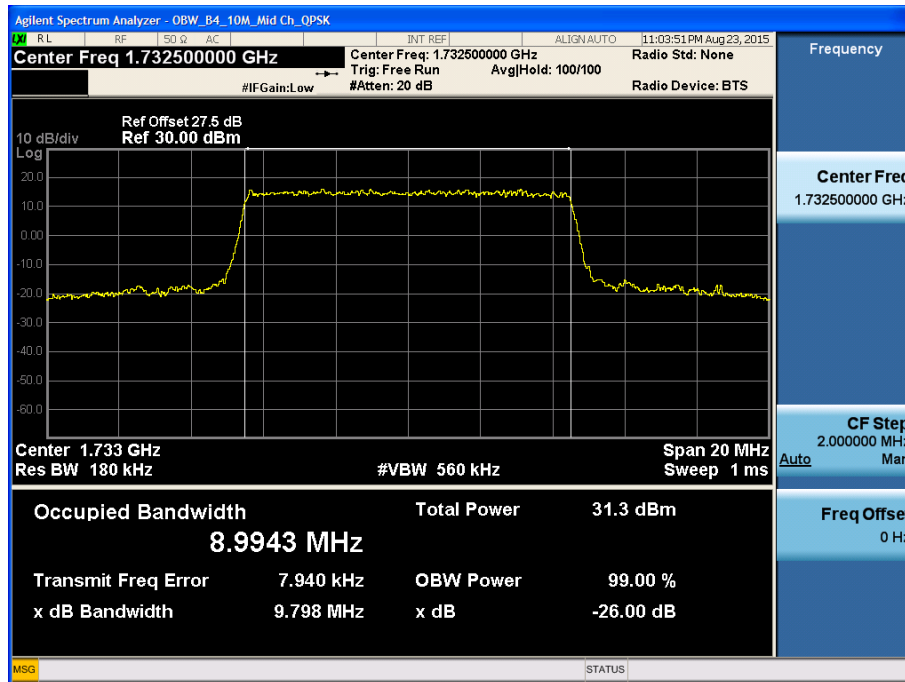


BAND 4. Occupied Bandwidth Plot (10M BW Ch.20175 16QAM RB 50)

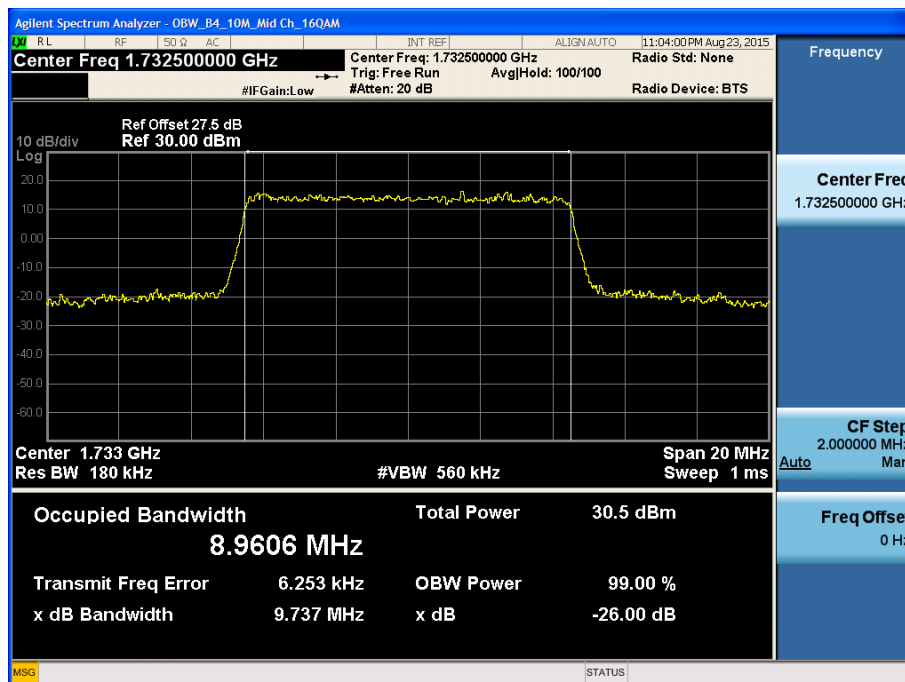


BAND 4. Occupied Bandwidth Plot (15M BW Ch.20175 QPSK RB 75)

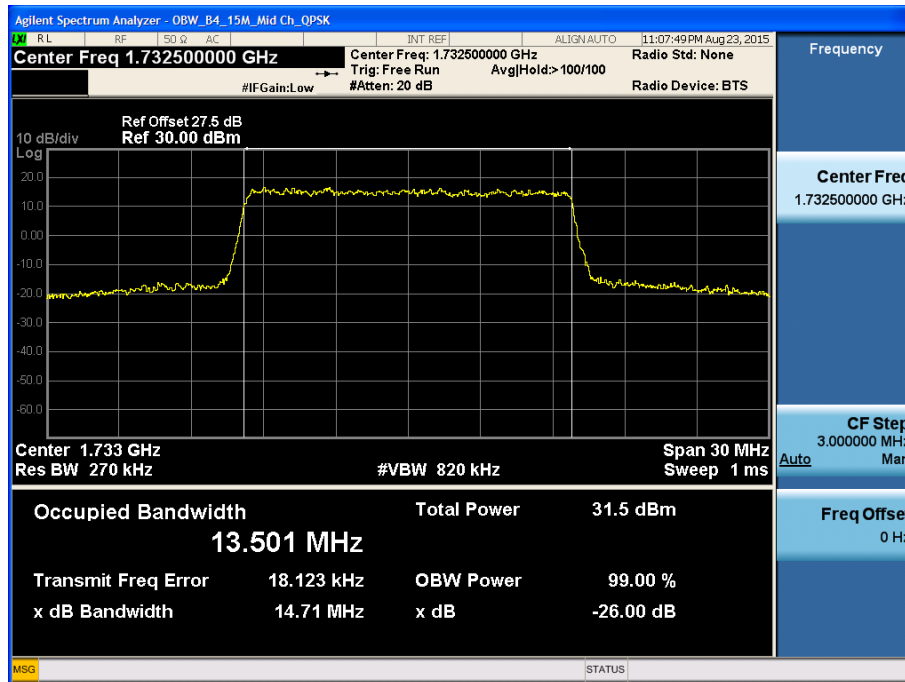


BAND 4. Occupied Bandwidth Plot (15M BW Ch.20175 16QAM RB 75)

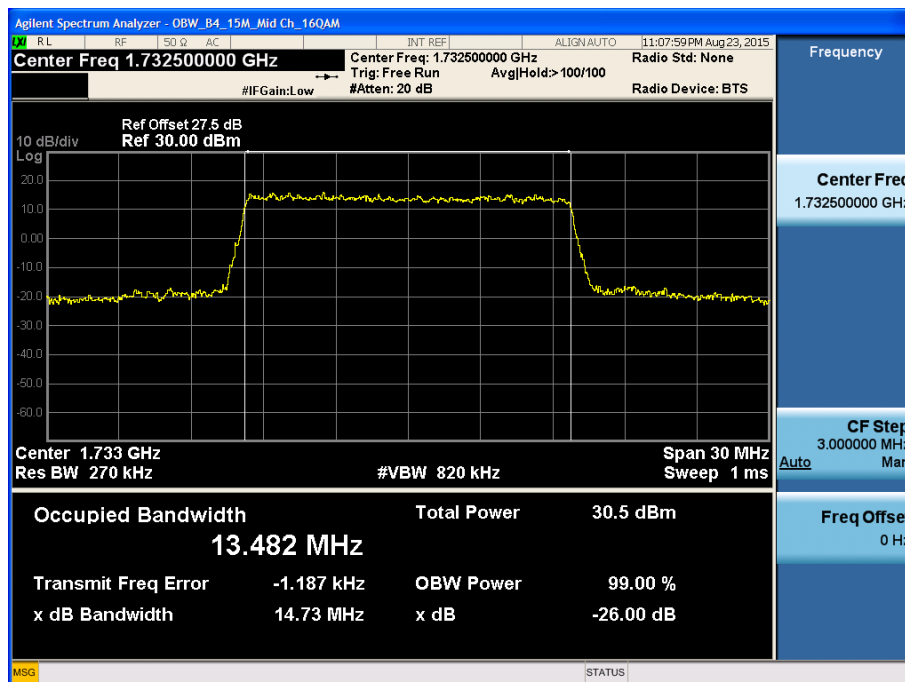


BAND 4. Occupied Bandwidth Plot (20M BW Ch.20175 QPSK RB 100)

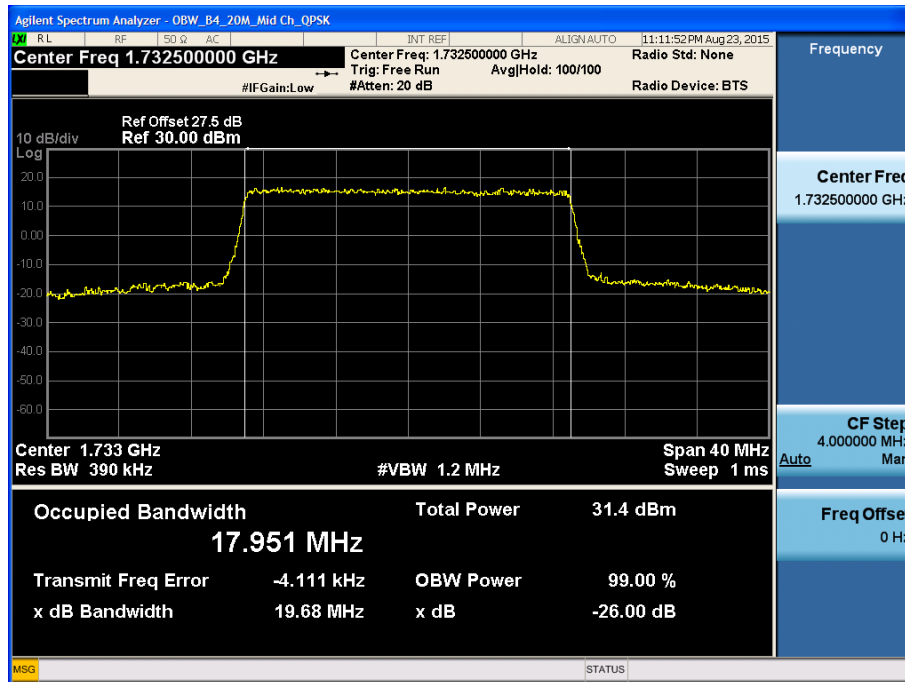


BAND 4. Occupied Bandwidth Plot (20M BW Ch.20175 16QAM RB 100)

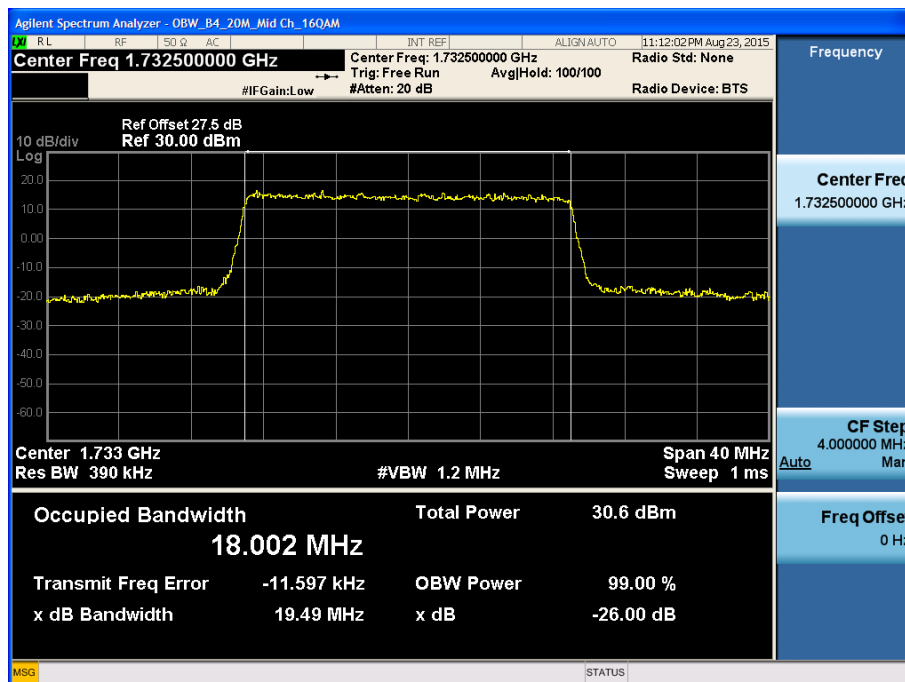


BAND 4. PARPlot (1.4M BW_Ch.20175_QPSK_RB6_0)

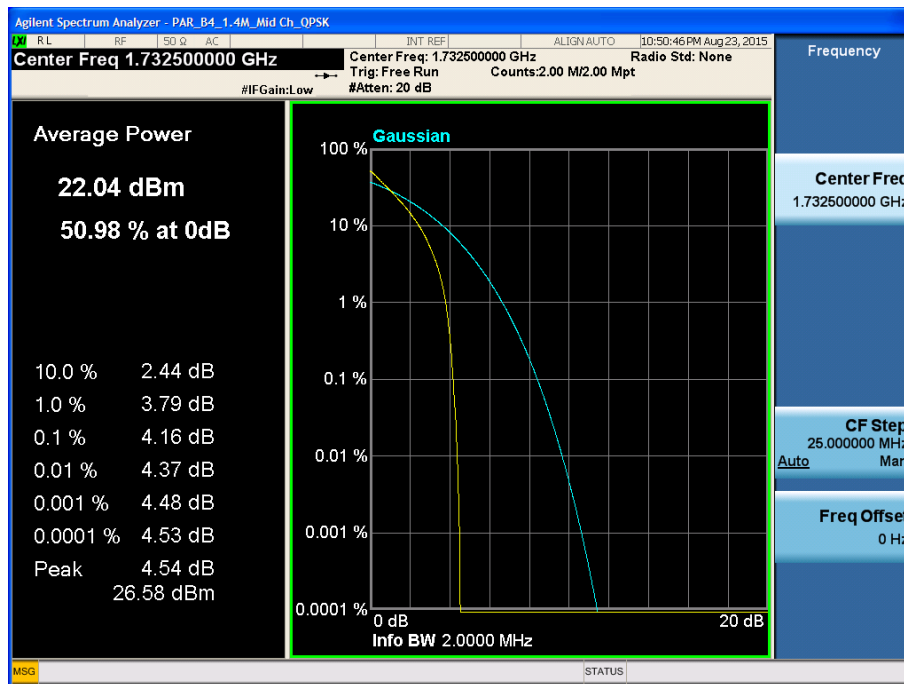


BAND 4. PARPlot (1.4M BW_Ch.20175_16QAM_RB6_0)

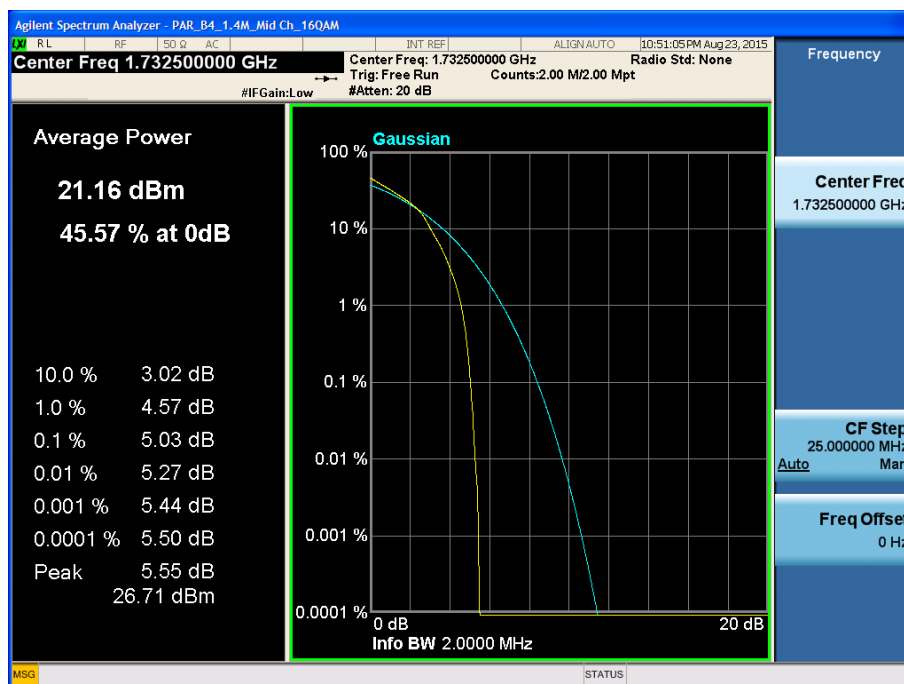


BAND 4. PAR Plot (3M BW_Ch.20175_QPSK_RB15_0)

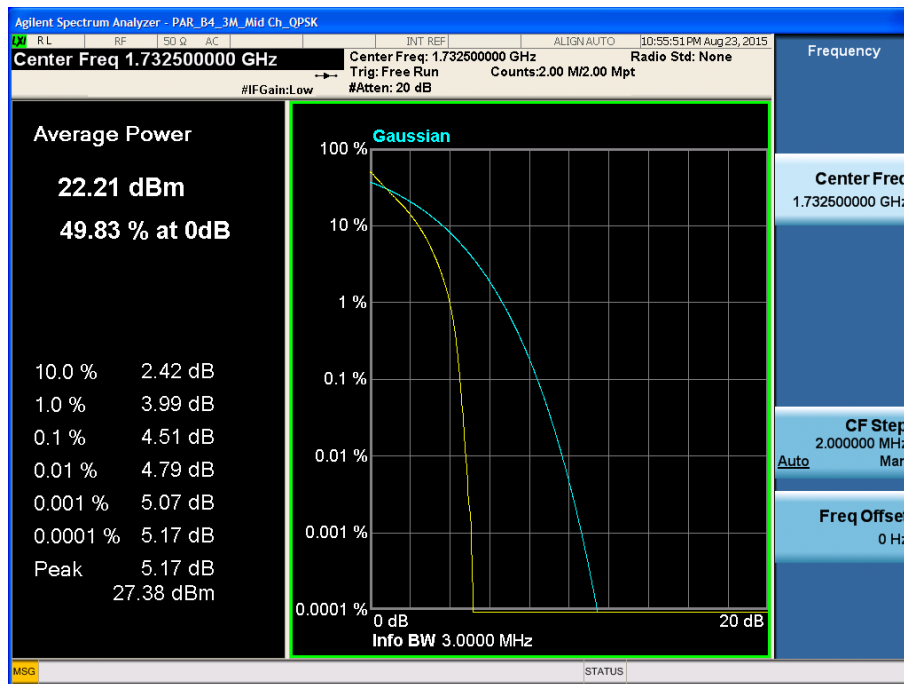


BAND 4. PAR Plot (3M BW_Ch.20175_16QAM_RB15_0)

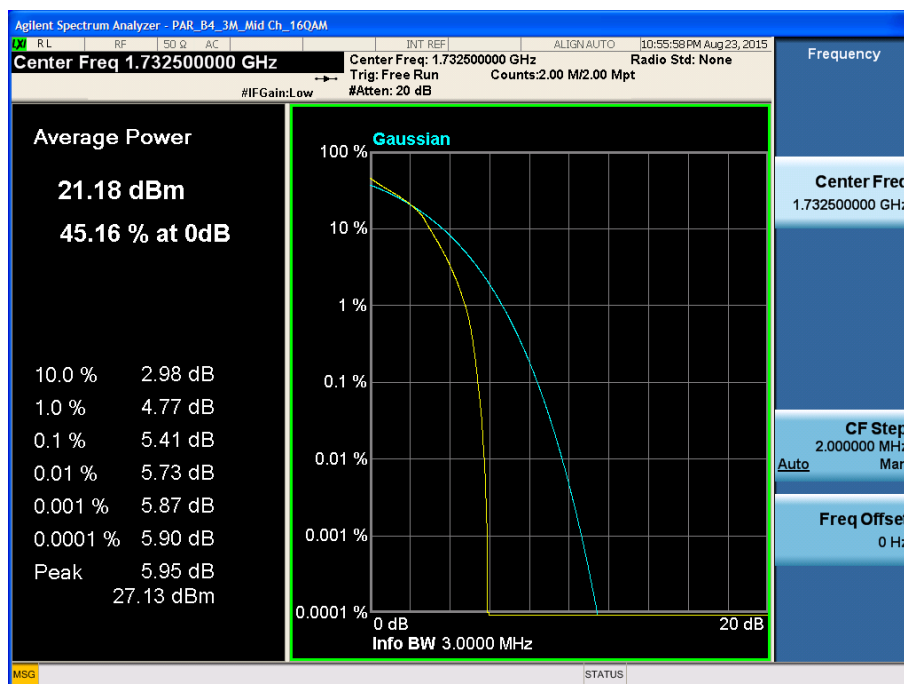


BAND 4. PAR Plot (5M BW_Ch.20175_QPSK_RB25_0)

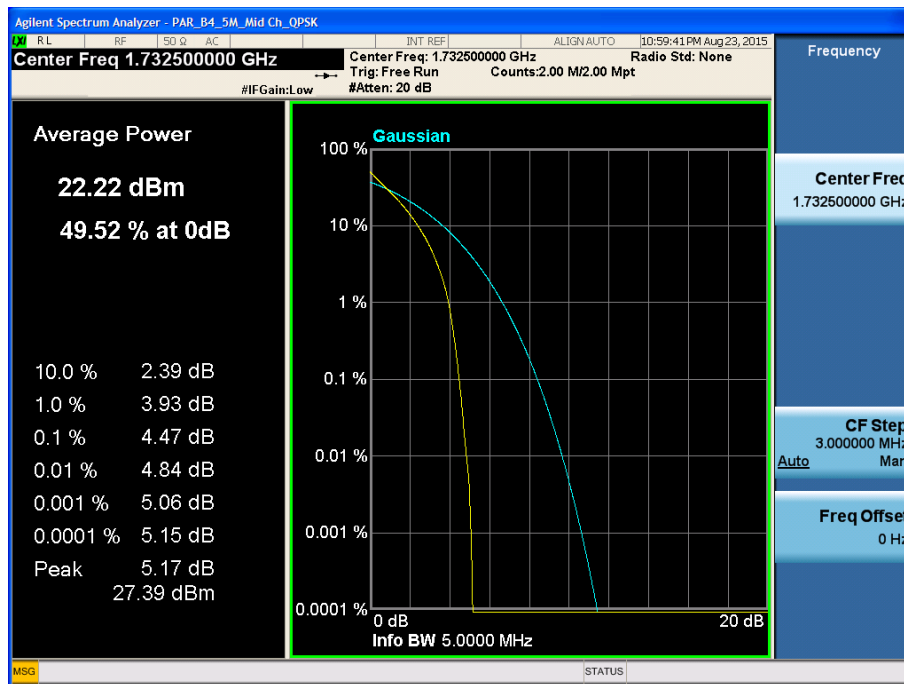

BAND 4. PAR Plot (5M BW_Ch.20175_16QAM_RB25_0)

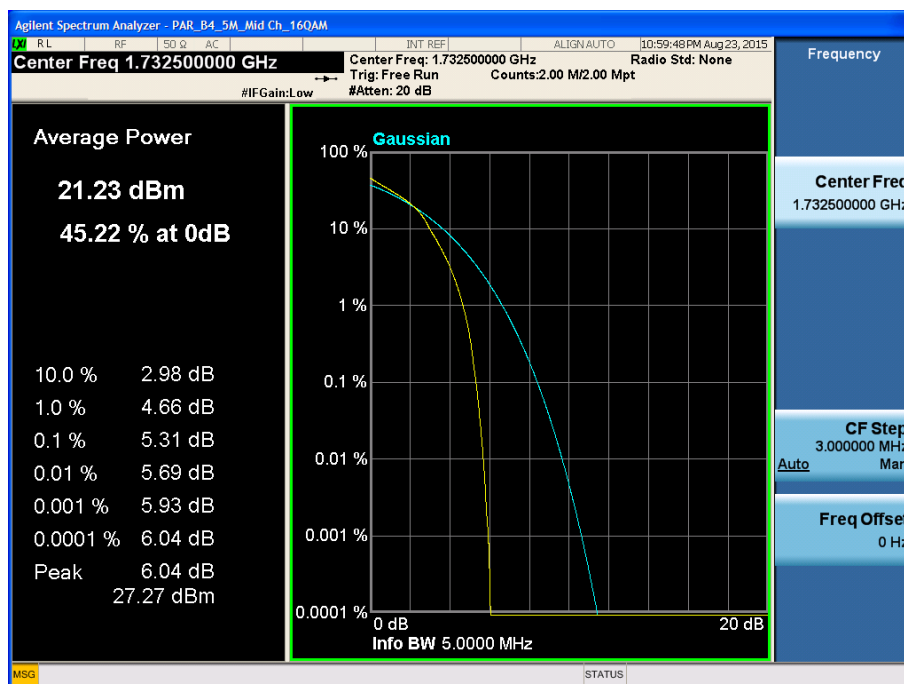

BAND 4. PAR Plot (10M BW_Ch.20175_QPSK_RB50_0)

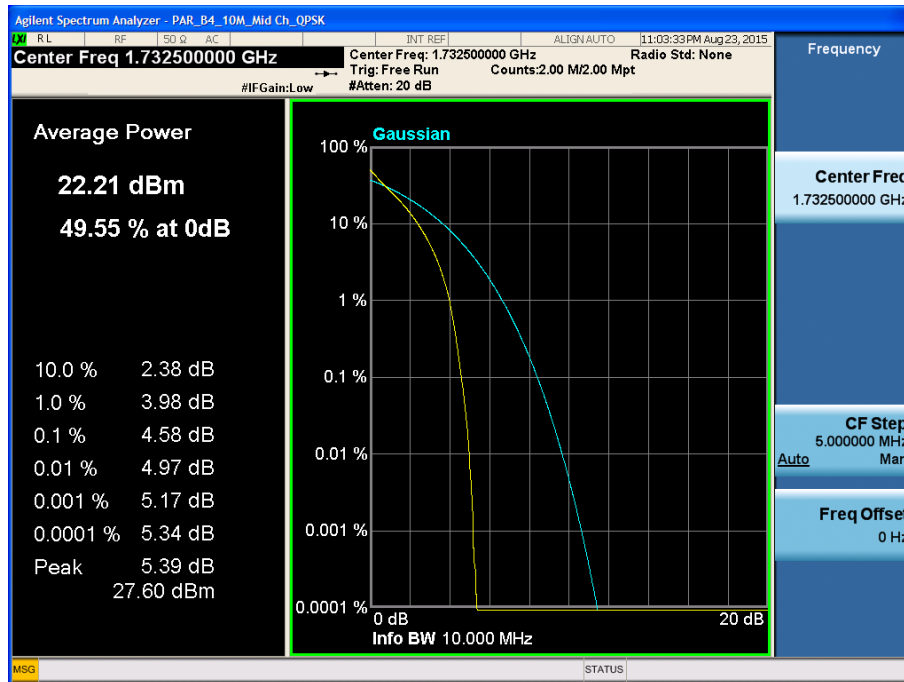

BAND 4. PAR Plot (10M BW_Ch.20175_16QAM_RB50_0)

