FCC TEST REPORT

Application No:	ZR/2020/70006
Applicant:	LG Electronics USA, Inc
Address of Applicant	111 Sylvan Avenue, North Building Englewood Cliffs, NJ 07632
Manufacturer:	Huaqin Telecom Technology Co.,Ltd.
Address of Manufacturer	No.1 Building, No.9 Building, No.399,Keyuan Road,Zhangjiang Hi-tech Park,Shanghai,P.R.China
EUT Description:	Mobile handset
Model No.:	LM-K520HMW, LM-K520HM, LM-K525HMW, LM-K525HM
Trade Mark:	LG
FCC ID:	ZNFK520HMW
Standards:	47 CFR FCC Part 2, Subpart J 47 CFR Part 15, Subpart C
Test Method	KDB558074 D01 15.247 Meas Guidance v05r02 ANSI C63.10 (2013)
Date of Receipt:	2020/7/10
Date of Test:	2020/7/10 to 2020/8/13
Date of Issue:	2020/8/13
Test Result:	**PASS ***

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Derek Yang
Wireless Laboratory Manager

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

1 Version

Revision Record				
Version	**Chapter**	**Date**	**Modifier**	**Remark**
01		2020/8/13		Original

Authorized for issue by:				
Tested By		Mike Hu **(Mike Hu) /Project Engineer**		
Checked By		David Chen **(David Chen) /Reviewer**		

2 Test Summary

Test Item	Test Requirement	Test method	Test Result	Result
AC Power Line Conducted Emission	15.207	ANSI C63.10 2013	Clause 4.2	PASS
Conducted Output Power	15.247 (b)(3)	ANSI C63.10 2013	Clause 4.3	PASS
DTS (6 dB) Bandwidth & 99% Occupied Bandwidth	15.247 (a)(2)	ANSI C63.10 2013	Clause 4.4	PASS
Power Spectral Density	15.247 (e)	ANSI C63.10 2013	Clause 4.5	PASS
Band-edge for RF Conducted Emissions	15.247(d)	ANSI C63.10 2013	Clause 4.6	PASS
RF Conducted Spurious Emissions	15.247(d)	ANSI C63.10 2013	Clause 4.7	PASS
Radiated Spurious Emissions	15.205/15.209	ANSI C63.10 2013	Clause 4.8	PASS
Restricted bands around fundamental frequency (Radiated Emission)	15.205/15.209	ANSI C63.10 2013	Clause 4.9	PASS

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Contents

3 General Information

3.1 Client Information

Applicant:	LG Electronics USA, Inc
Address of Applicant:	111 Sylvan Avenue, North Building Englewood Cliffs, NJ 07632
Manufacturer:	Huaqin Telecom Technology Co.,Ltd.
Address of Manufacturer:	No.1 Building, No.9 Building, No.399,Keyuan Road,Zhangjiang Hi-tech Park,Shanghai,P.R.China

3.2 Test Location

Company:	SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
Address:	No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China
Post code:	518057
Telephone:	+86 (0) 755 2601 2053
Fax:	+86 (0) 755 2671 0594
E-mail:	ee.shenzhen@sgs.com

3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• VCCI

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

• FCC –Designation Number: CN1178

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

• Industry Canada (IC)

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

3.4 General Description of EUT

EUT Description:	Mobile handset
Model No.:	LM-K520HMW, LM-K520HM, LM-K525HMW, LM-K525HM
Trade Mark:	LG
Operation Frequency:	2400MHz~2483.5MHz fc = 2402 MHz + N * 2 MHz, where: -fc = "Operating Frequency" in MHz, -N = "Channel Number" with the range from 0 to 39.
Bluetooth Version:	Bluetooth 5.0
Modulation Type:	GFSK
Number of Channel:	40
Sample Type:	☒ Portable Device, ☐ Module
Antenna Type:	☐ External, ☒ Integrated
Antenna Gain:	-5.56dBi
Power Supply:	☒ AC/DC Adapter; ☒ Battery; ☐ PoE:; ☐ Other:

Difference description:

The differences between LM-K520HMW and other models are shown in the below table:

Model		LM-K520HMW (Full approval)	LM-K520HM (Update approval)	LM-K525HMW (Updated approval)	LM-K525HM (Update approval)
Software version		different	different	different	different
Licensed Frequency	LTE	B1/B2/B3/B4/ B5/B7/B8/B12/B13/B17/B28/ B38/B66	B1/B2/B3/B4/ B5/B7/B8/B12/B13/B17/B28/ B38/B66	B1/B2/B3/B4/ B5/B7/B8/B12/B13/ B17/B28/ B38/B66	B1/B2/B3/B4/ B5/B7/B8/B12/B13/B17/B28/ B38/B66
	UMTS	B1/B2/B4/B5/ B8	B1/B2/B4/B5/ B8	B1/B2/B4/B5/ B8	B1/B2/B4/B5/ B8
	GSM	the same	the same	the same	the same
	IC	the same	the same	the same	the same
	Antenna	the same	the same	the same	the same
Unlicensed Frequency	Bluetooth	the same	the same	the same	the same
	2.4G Wi-Fi	the same	the same	the same	the same
	IC	the same	the same	the same	the same
	Antenna	the same	the same	the same	the same
Hardware	Ram / Rom	4G/64G	4G/64G	4G/128G	4G/128G
	Camera	the same	the same	the same	the same
	PCB	the same	the same	the same	the same

	USB Port	the same	the same	the same	the same
	RJ11 Port	the same	the same	the same	the same
	RJ45 Port	the same	the same	the same	the same
	NFC	Not support	Not support	Not support	Not support
	FM	Support	Support	Support	Support
Appearance	Dimension	the same	the same	the same	the same
	Color	the same	the same	the same	the same
Accessory	Battery	the same	the same	the same	the same
	External Charger	the same	the same	the same	the same
	USB label	the same	the same	the same	the same
other	SIM card	Double SIM	Single SIM	Double SIM	Single SIM

Remark:

According to the difference description above, only the model LM-K520HMW was fully tested, for other models were performed the Radiated Emission test for discrepancy, since the electrical circuit design, layout, components used and internal wiring were identical for all above models. With difference being on mode, appearance and color.

Operation Frequency of each channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	10	2422MHz	20	2442MHz	30	2462MHz
1	2404MHz	11	2424MHz	21	2444MHz	31	2464MHz
2	2406MHz	12	2426MHz	22	2446MHz	32	2466MHz
3	2408MHz	13	2428MHz	23	2448MHz	33	2468MHz
4	2410MHz	14	2430MHz	24	2450MHz	34	2470MHz
5	2412MHz	15	2432MHz	25	2452MHz	35	2472MHz
6	2414MHz	16	2434MHz	26	2454MHz	36	2474MHz
7	2416MHz	17	2436MHz	27	2456MHz	37	2476MHz
8	2418MHz	18	2438MHz	28	2458MHz	38	2478MHz
9	2420MHz	19	2440MHz	29	2460MHz	39	2480MHz

Remark:
In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel (CH0)	2402MHz
The middle channel (CH19)	2440MHz
The highest channel (CH39)	2480MHz

3.5 Test Environment

Operating Environment	
Temperature:	25.0 °C
Humidity:	50 % RH
Atmospheric Pressure:	101.32 KPa

3.6 Description of Support Units

The EUT has been tested independent unit.

4 Test results and Measurement Data

4.1 Antenna Requirement

Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -5.56dBi.	

4.2 AC Power Line Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10: 2013		
Test Frequency Range:	150kHz to 30MHz		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
	* Decreases with the logarithm of the frequency.		
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane. 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.		
Test Setup:	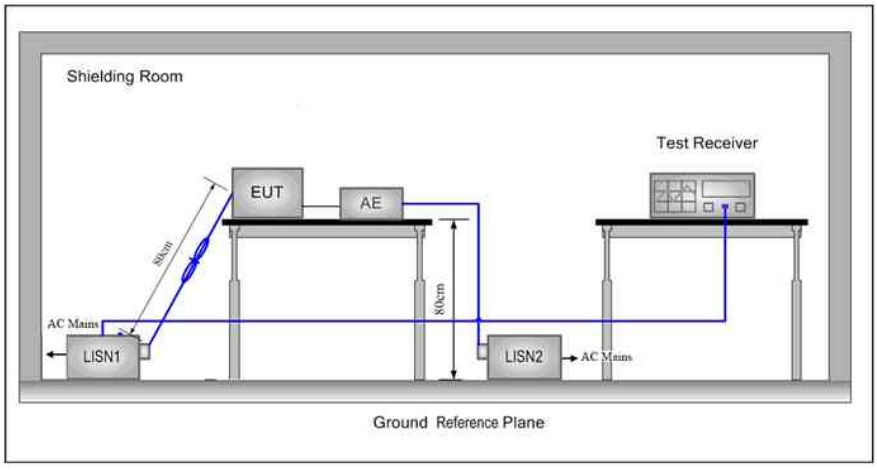		

Test Mode:	Transmitting with GFSK modulation. Charge +Transmitting mode.
Instruments Used:	Refer to section 5.10 for details.
Test Results:	Pass

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

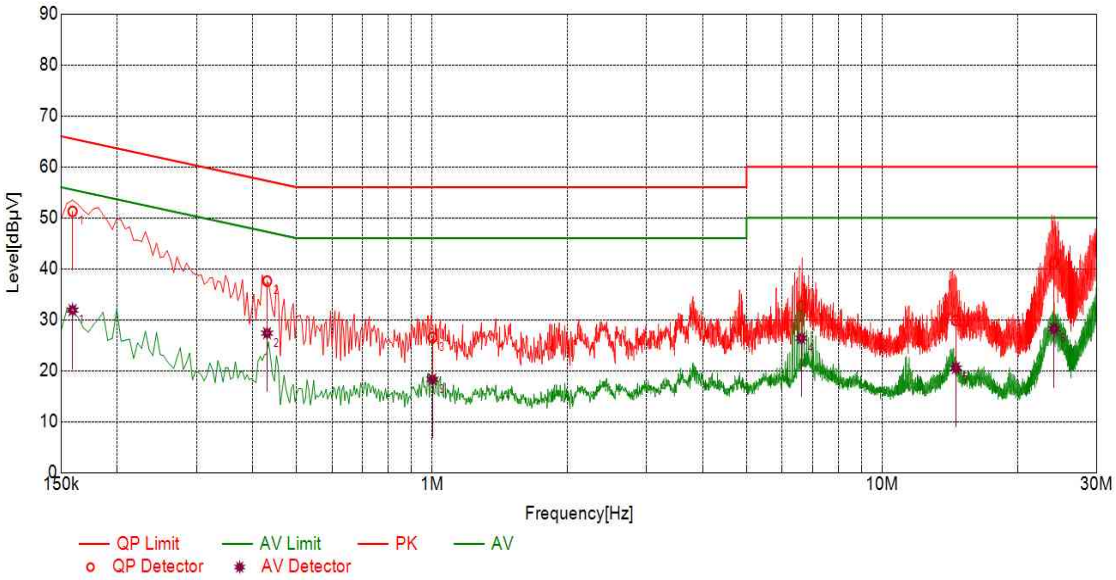

Test Graph

Final Data List									
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	AV Value [dBµV]	AV Limit [dBµV]	AV Margin [dB]	Type
1	0.1591	10.10	51.26	65.51	14.25	31.89	55.51	23.62	L
2	0.4304	10.10	37.58	57.25	19.67	27.36	47.25	19.89	L
3	1.0027	10.10	26.53	56.00	29.47	18.30	46.00	27.70	L
4	6.6169	10.10	32.74	60.00	27.26	26.38	50.00	23.62	L
5	14.5866	10.11	29.86	60.00	30.14	20.53	50.00	29.47	L
6	24.1078	10.11	41.26	60.00	18.74	28.23	50.00	21.77	L

Neutral line:

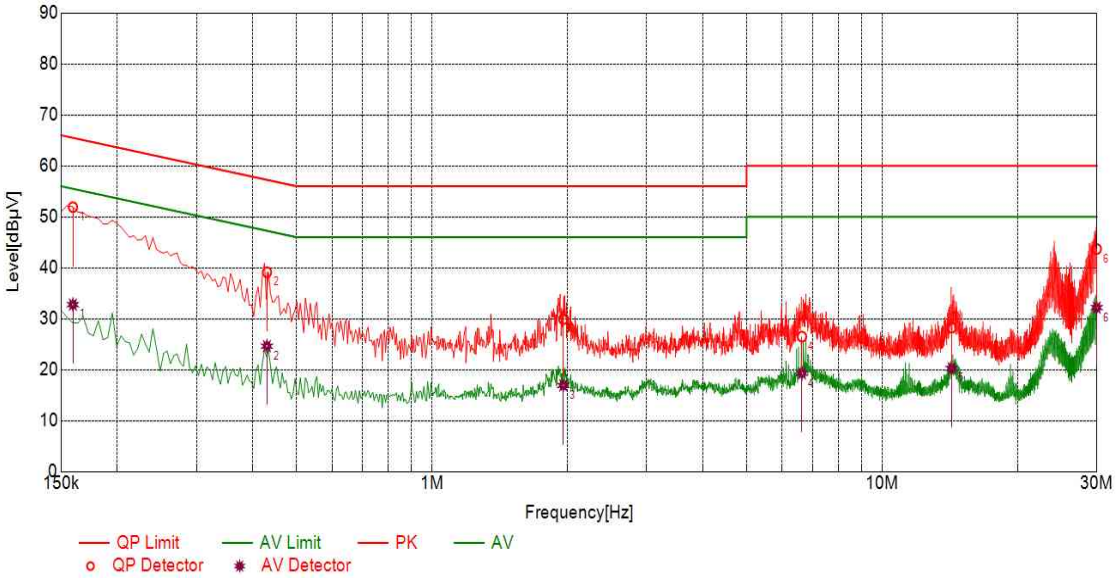

Test Graph

Final Data List									
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	AV Value [dBµV]	AV Limit [dBµV]	AV Margin [dB]	Type
1	0.1594	10.10	51.90	65.49	13.59	32.77	55.49	22.72	N
2	0.4300	10.10	39.12	57.25	18.13	24.62	47.25	22.63	N
3	1.9576	10.10	29.92	56.00	26.08	16.91	46.00	29.09	N
4	6.6387	10.10	26.49	60.00	33.51	19.28	50.00	30.72	N
5	14.2677	10.11	28.25	60.00	31.75	20.26	50.00	29.74	N
6	29.9794	10.11	43.69	60.00	16.31	32.18	50.00	17.82	N

Remarks:

1. The following Quasi-Peak and Average measurements were performed on the EUT:

2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·深圳·科技园中区M-10栋一号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

4.3 Duty Cycle

4.3.1 Test Results

Test Mode	TX Freq. [MHz]	Duty cycle [%]
BLE_1M	CH0, CH19, CH39	84.72
BLE_2M	CH0, CH19, CH39	56.74

4.3.1 Test Plots

4.3.1.1 BLE_1M

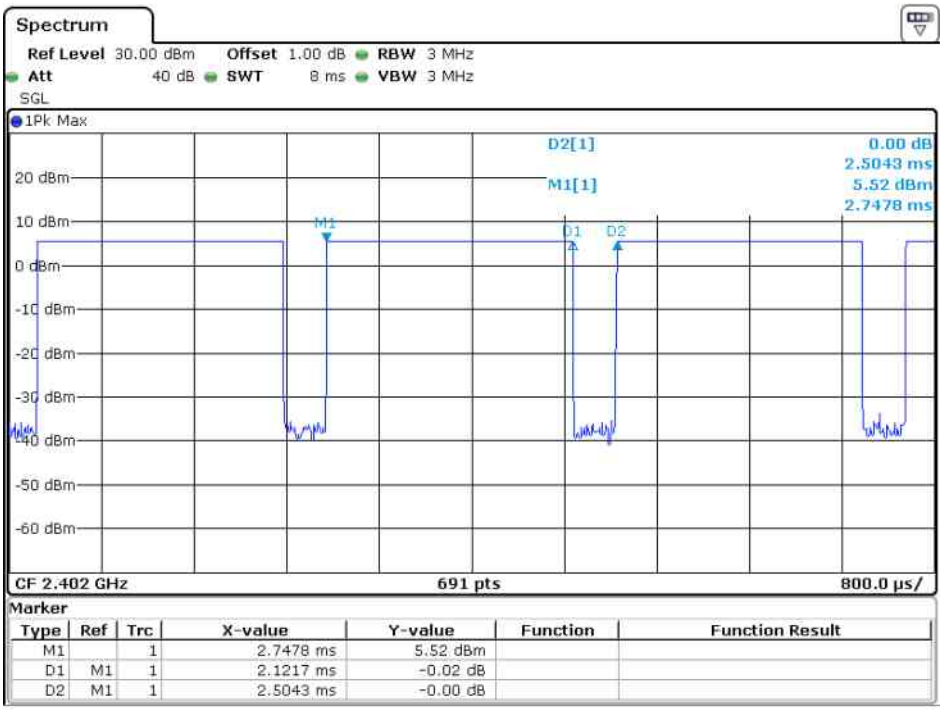

Date: 15.JUL.2020 13:17:11

4.3.1.2 **BLE_2M**

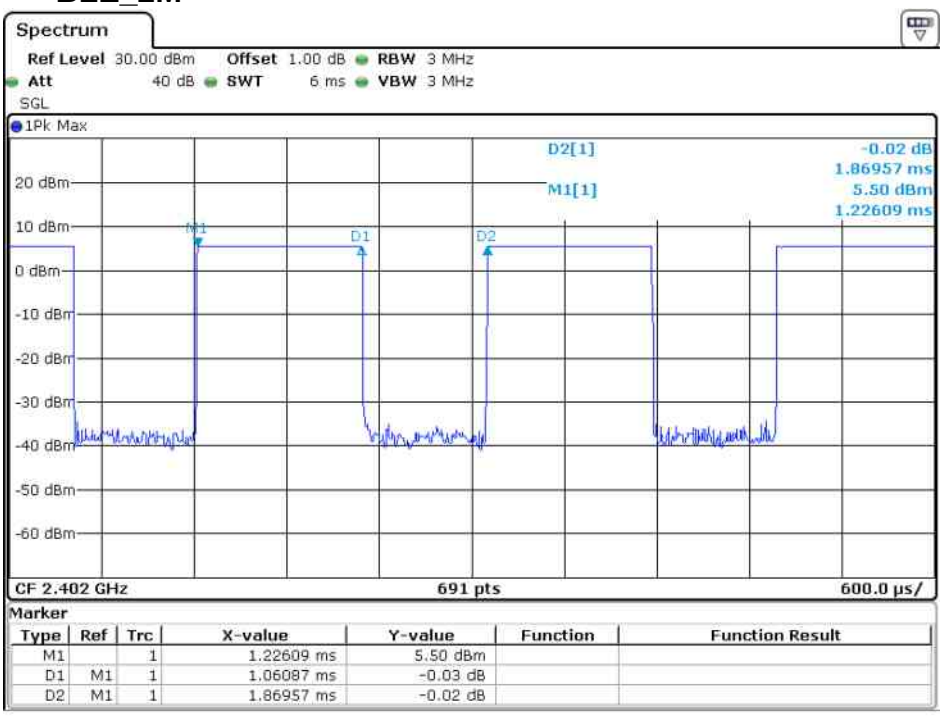

Date: 15.JUL.2020 13:18:17

4.4 Conducted Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)
Test Method:	ANSI C63.10 :2013 Section 11.9.1.1
Test Setup:	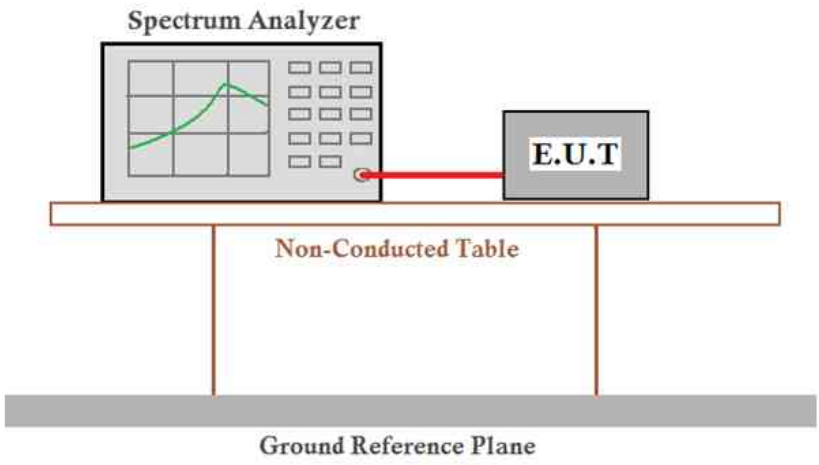
Limit:	30dBm
Test Mode:	Transmitting with GFSK modulation.
Instruments Used:	Refer to section 5.10 for details.
Test Results:	Pass

4.4.1 Test Results

Measurement Data of Peak Power:

GFSK_1M mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	4.62	30.00	Pass
Middle	6.41	30.00	Pass
Highest	5.37	30.00	Pass

GFSK_2M mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	5.69	30.00	Pass
Middle	7.43	30.00	Pass
Highest	6.48	30.00	Pass

4.4.2 Test plots:

4.4.2.1 GFSK 1M_Lowest Channel

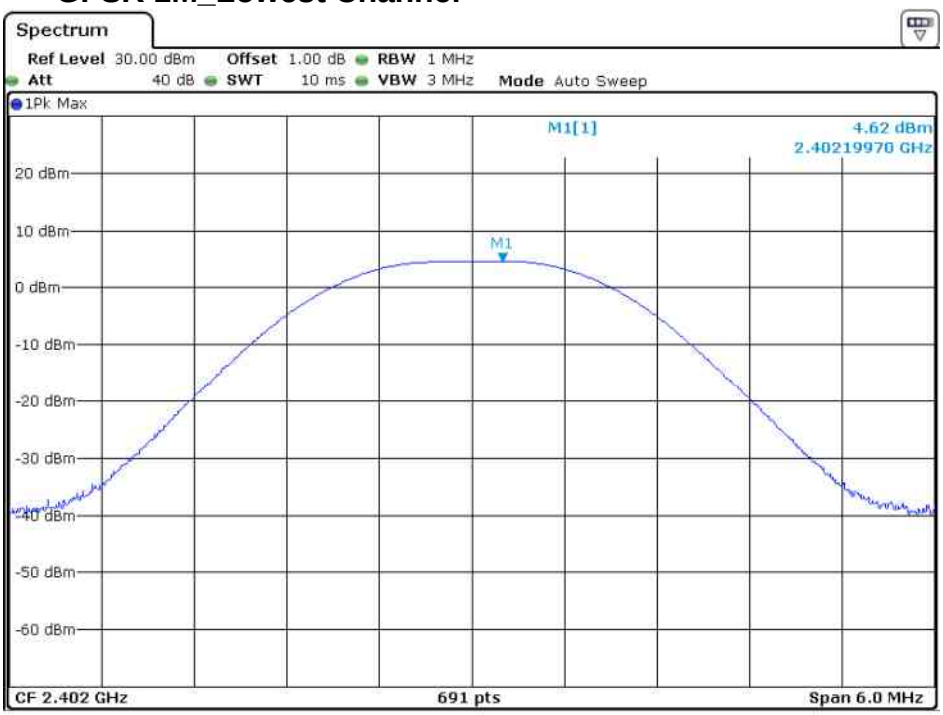

Date: 15.JUL.2020 13:29:58

4.4.2.2 GFSK 1M_Middle Channel

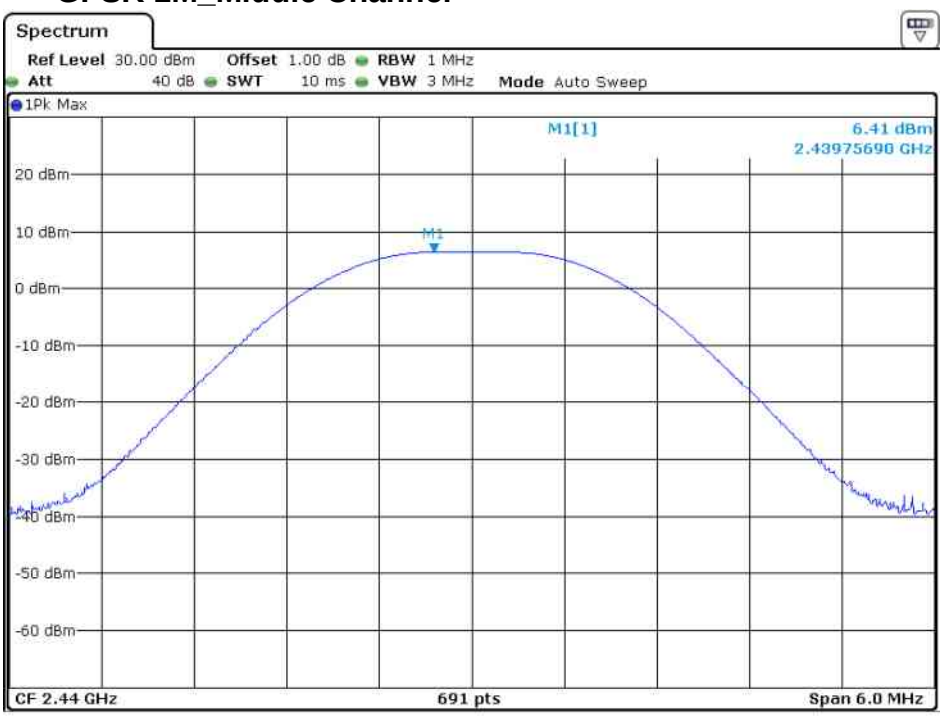

Date: 15.JUL.2020 13:26:04

4.4.2.3 GFSK 1M_Highest Channel

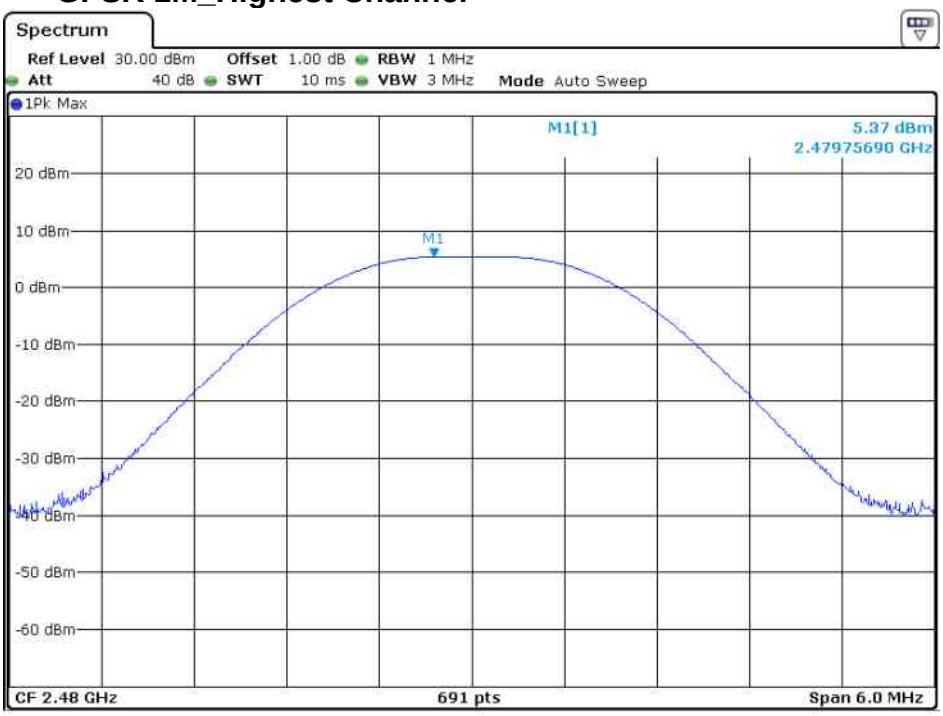

Date: 15.JUL.2020 13:25:45

4.4.2.4 GFSK 2M_Lowest Channel

Date: 15.JUL.2020 13:18:43

4.4.2.5 GFSK 2M_Middle Channel

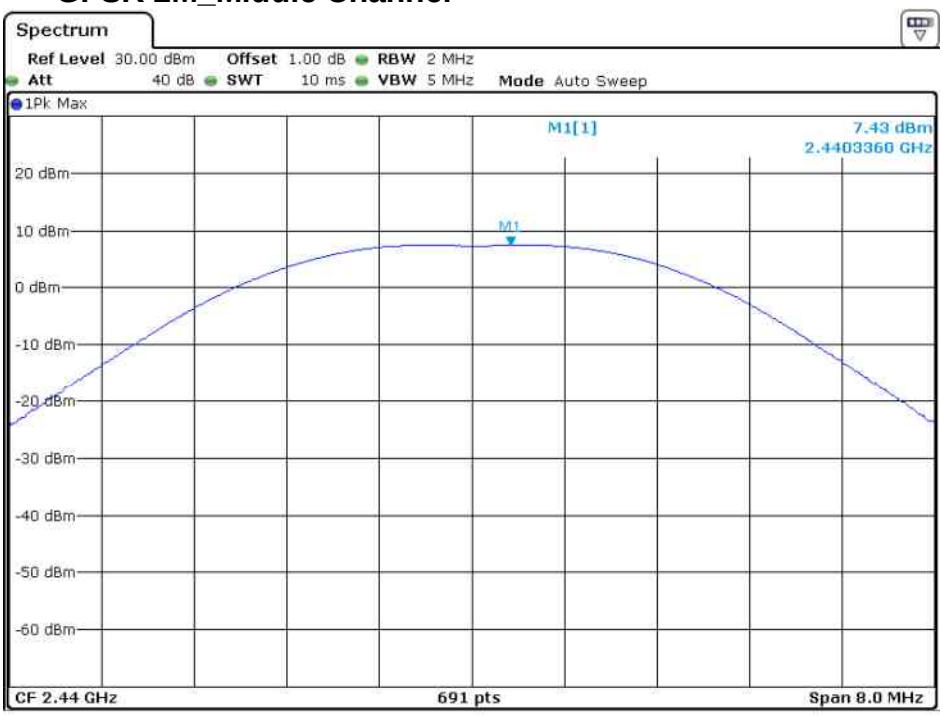

Date: 15.JUL.2020 13:21:50

4.4.2.6 GFSK 2M_Highest Channel

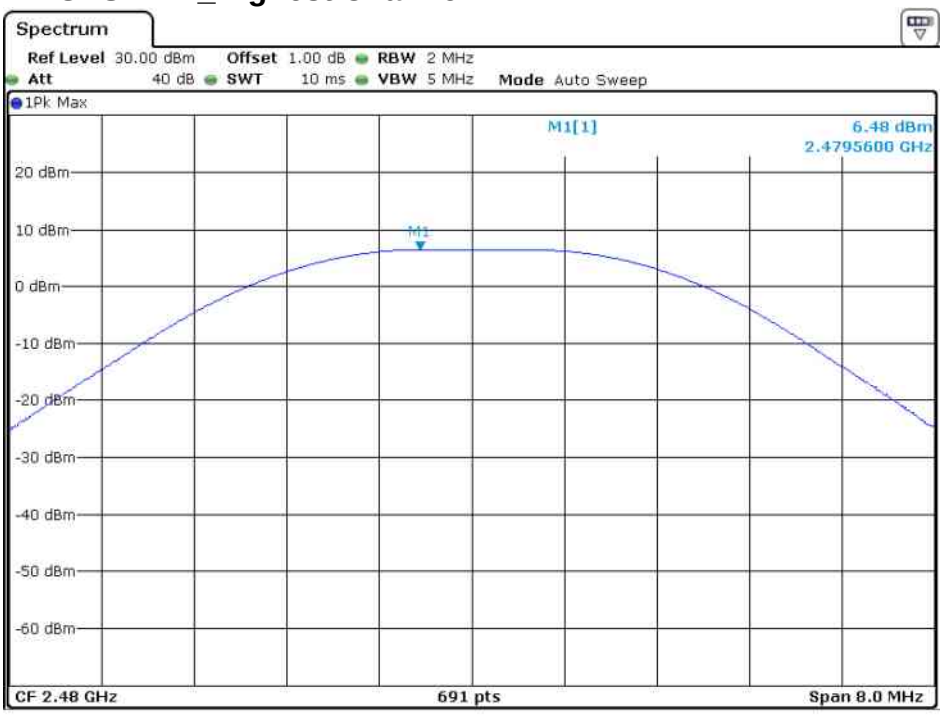

Date: 15.JUL.2020 13:22:08

4.5 DTS (6 dB) Bandwidth & 99% Occupied Bandwidth

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2)
Test Method:	ANSI C63.10: 2013 Section 11.8 Option 2
Test Setup:	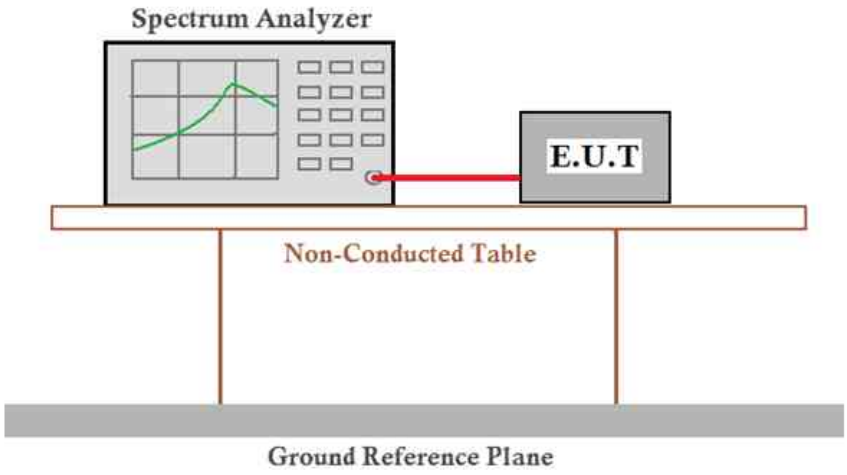
Limit:	≥ 500 kHz
Test Mode:	Transmitting with GFSK modulation.
Instruments Used:	Refer to section 5.10 for details.
Test Results:	Pass

4.5.1 Test Results

Mode	Test Channel	99% Occupied Bandwidth (MHz)	6dB Emission Bandwidth (MHz)	Limit (kHz)	Result
GFSK_1M	Lowest	1.04	0.67	≥500	Pass
	Middle	1.03	0.67	≥500	Pass
	Highest	1.03	0.67	≥500	Pass

Mode	Test Channel	99% Occupied Bandwidth (MHz)	6dB Emission Bandwidth (MHz)	Limit (kHz)	Result
GFSK_2M	Lowest	2.08	1.17	≥500	Pass
	Middle	2.08	1.17	≥500	Pass
	Highest	2.08	1.17	≥500	Pass

4.5.2 Test plots

4.5.2.1 GFSK 1M_Lowest Channel

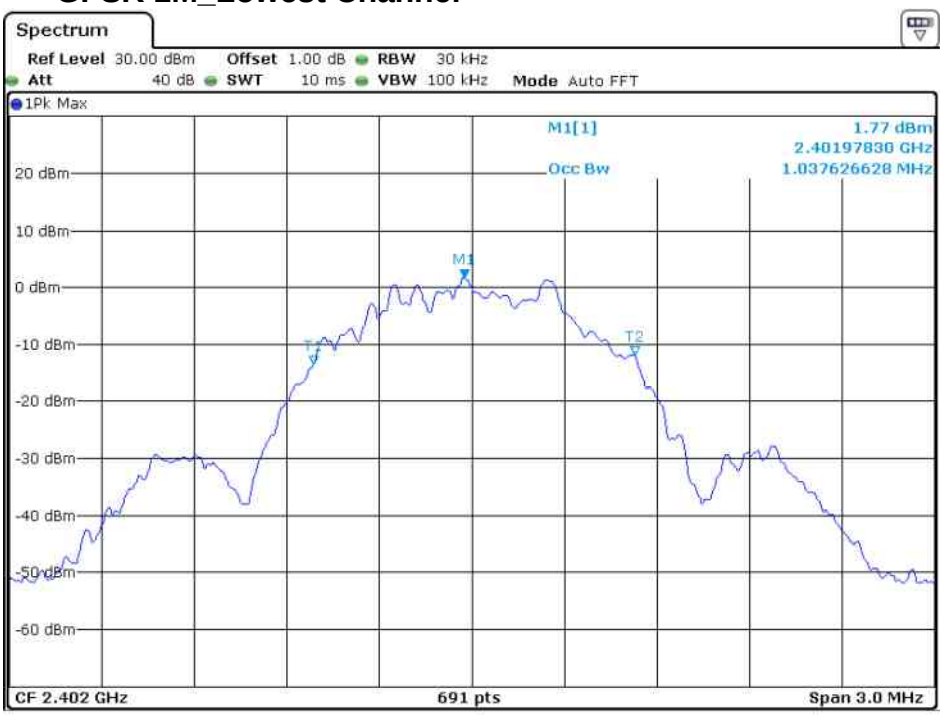

Date: 15.JUL.2020 13:27:50

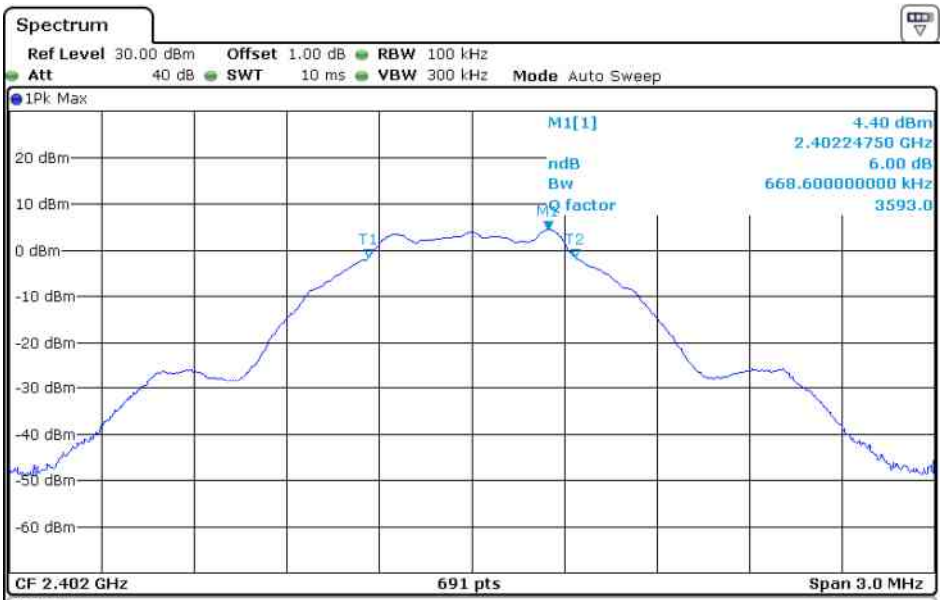

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.4022475 GHz	4.40 dBm	ndB down	668.6 kHz
T1		1	2.4016657 GHz	-1.60 dBm	ndB	6.00 dB
T2		1	2.4023343 GHz	-1.59 dBm	Q factor	3593.0

Date: 15.JUL.2020 13:27:33

4.5.2.2 GFSK 1M_Middle Channel

Date: 15.JUL.2020 13:26:39

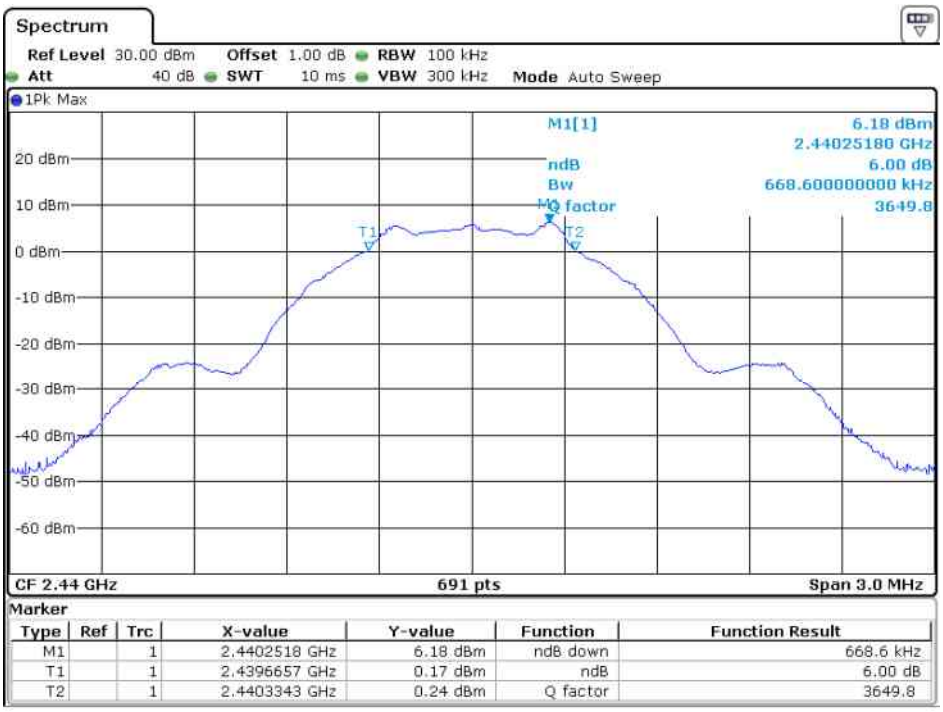

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.4402518 GHz	6.18 dBm	ndB down	668.6 kHz
T1		1	2.4396657 GHz	0.17 dBm	ndB	6.00 dB
T2		1	2.4403343 GHz	0.24 dBm	Q factor	3649.8

Date: 15.JUL.2020 13:27:04

4.5.2.3 GFSK 1M_Highest Channel

Date: 15.JUL.2020 13:24:54

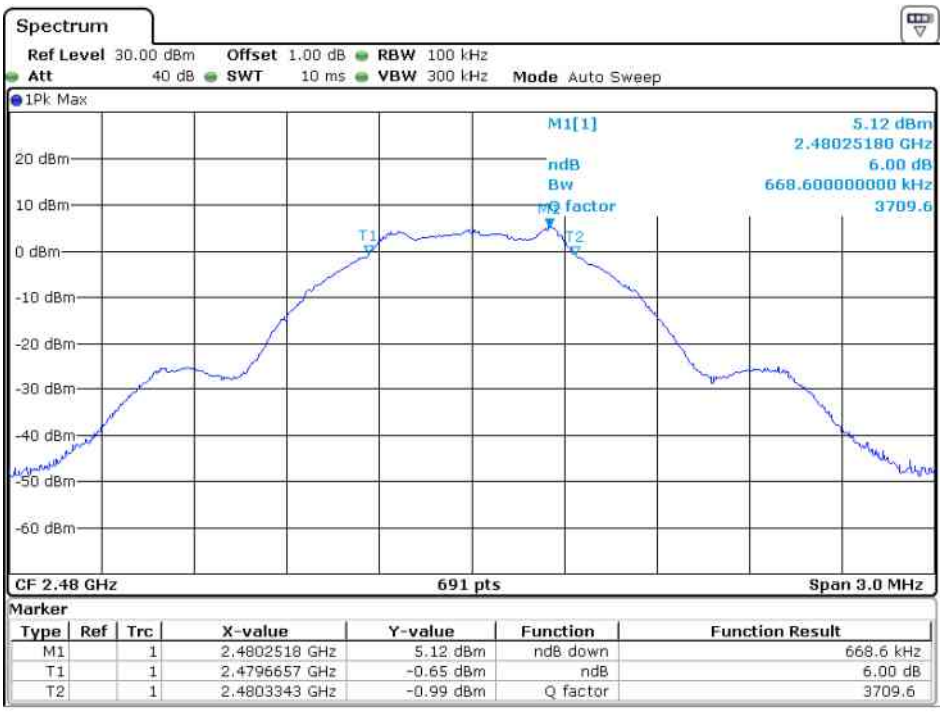

Date: 15.JUL.2020 13:25:16

4.5.2.4 GFSK 2M_Lowest Channel

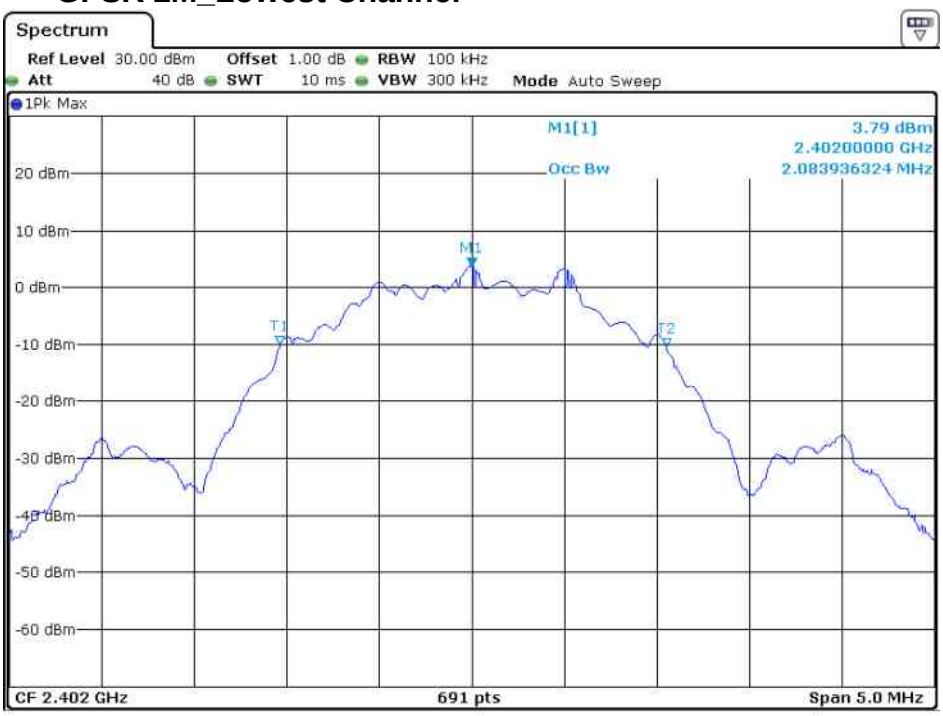

Date: 15.JUL.2020 13:19:16

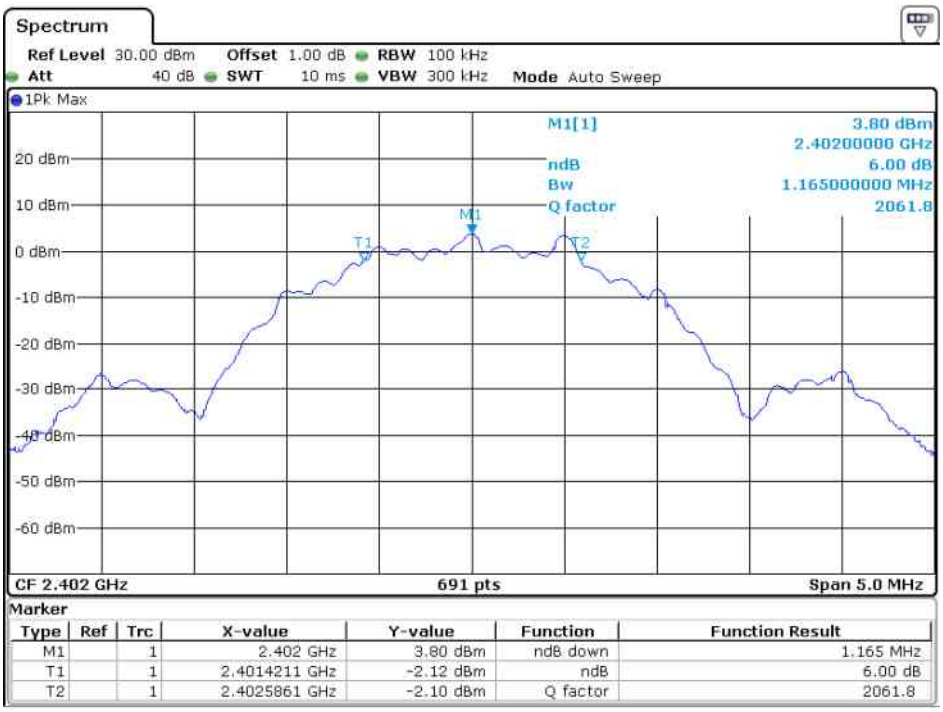

Date: 15.JUL.2020 13:19:30

4.5.2.5 GFSK 2M_Middle Channel

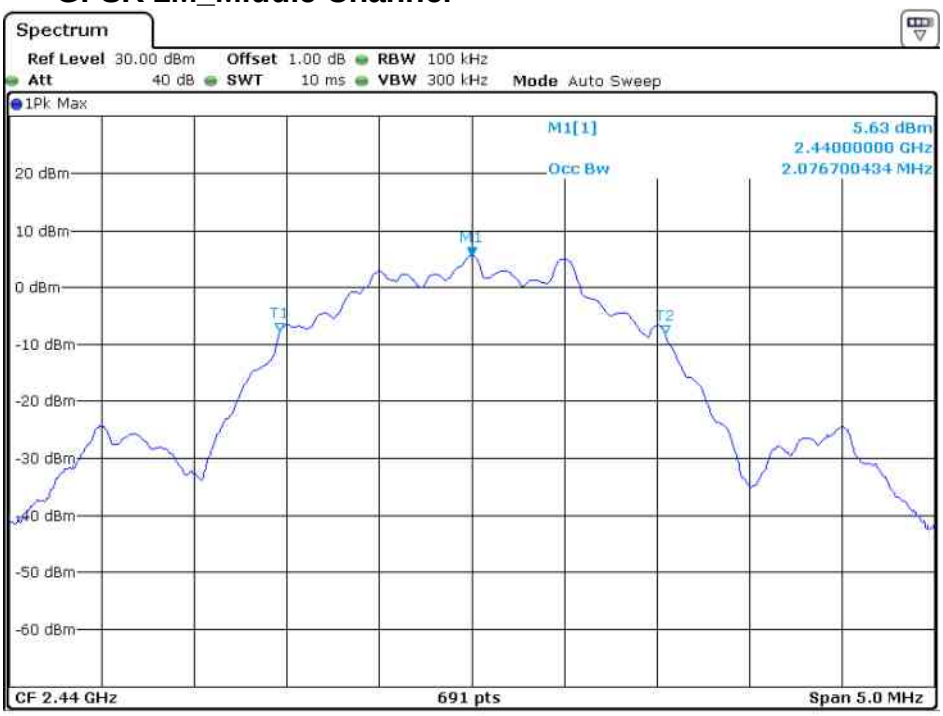

Date: 15.JUL.2020 13:20:53

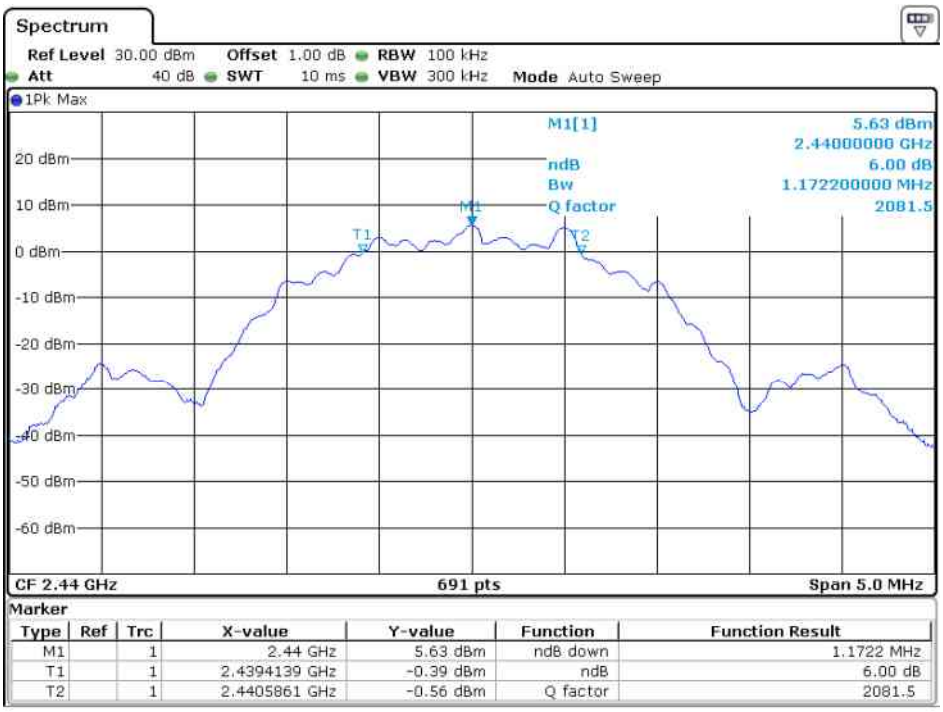

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.44 GHz	5.63 dBm	ndB down	1.1722 MHz
T1		1	2.4394139 GHz	-0.39 dBm	ndB	6.00 dB
T2		1	2.4405861 GHz	-0.56 dBm	Q factor	2081.5

Date: 15.JUL.2020 13:21:11

4.5.2.6 GFSK 2M_Highest Channel

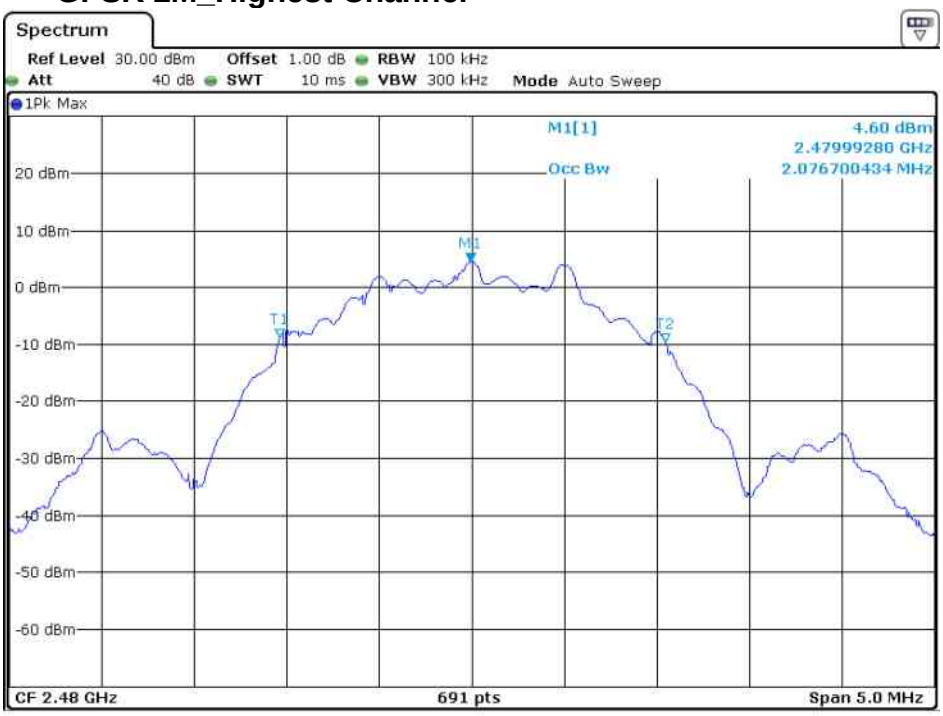

Date: 15.JUL.2020 13:22:42

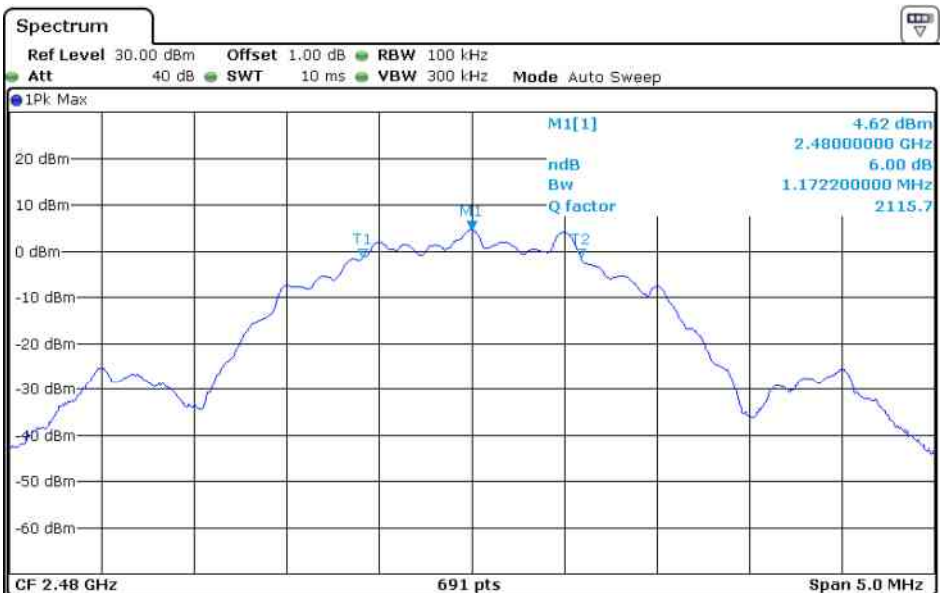

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.48 GHz	4.62 dBm	ndB down	1.1722 MHz
T1		1	2.4794139 GHz	-1.30 dBm	ndB	6.00 dB
T2		1	2.4805861 GHz	-1.33 dBm	Q factor	2115.7

Date: 15.JUL.2020 13:22:58

4.6 Power Spectral Density

Test Requirement:	47 CFR Part 15C Section 15.247 (e)
Test Method:	ANSI C63.10 :2013 Section 11.10.2
Test Setup:	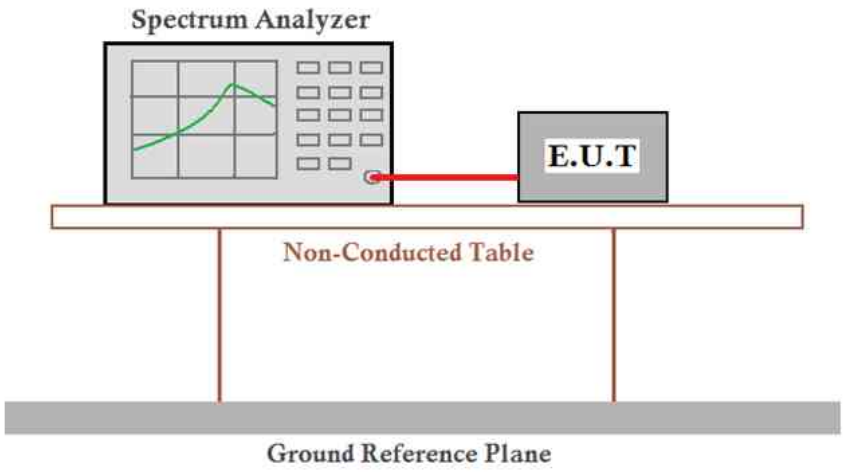
Limit:	≤8.00dBm/3kHz
Test Mode:	Transmitting with GFSK modulation.
Instruments Used:	Refer to section 5.10 for details.
Test Results:	Pass

4.6.1 Test Results

Mode	Test Channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
GFSK_1M	Lowest	-12.05	≤8.00	Pass
	Middle	-10.17	≤8.00	Pass
	Highest	-11.22	≤8.00	Pass

Mode	Test Channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
GFSK_2M	Lowest	-14.17	≤8.00	Pass
	Middle	-12.33	≤8.00	Pass
	Highest	-13.33	≤8.00	Pass

4.6.2 Test plots

4.6.2.1 GFSK 1M_Lowest Channel

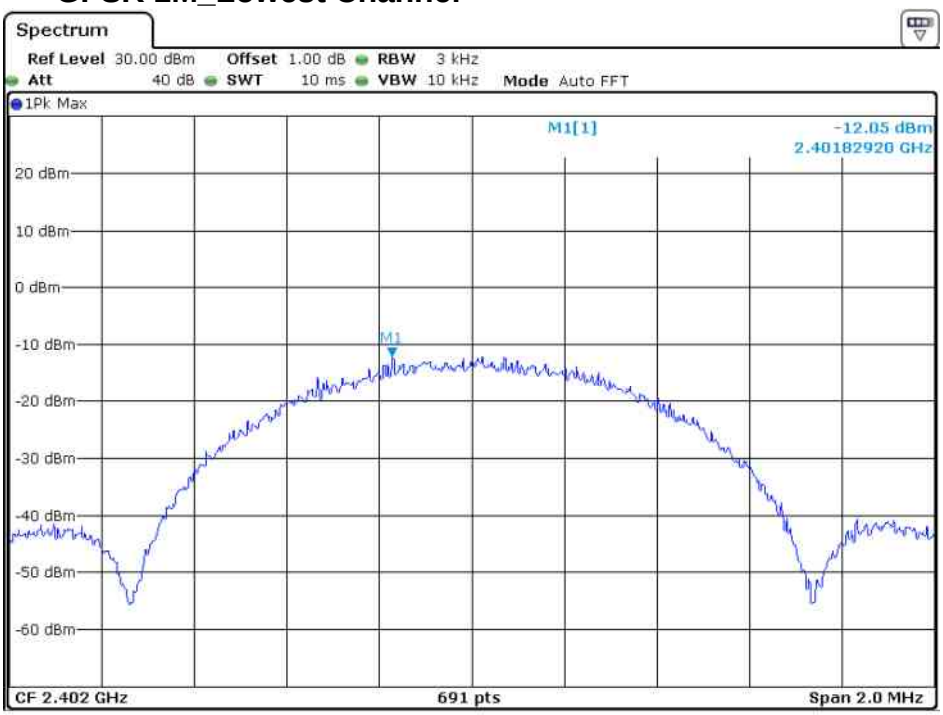

Date: 15.JUL.2020 13:29:22

4.6.2.2 GFSK 1M_Middle Channel

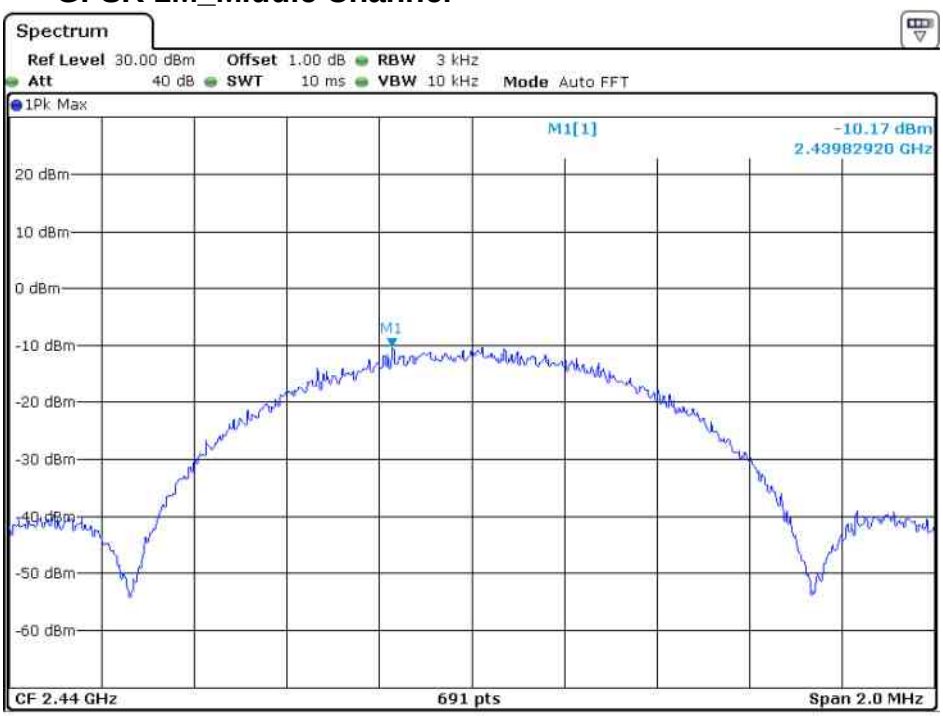

Date: 15.JUL.2020 13:26:19

4.6.2.3 GFSK 1M_Highest Channel

Date: 15.JUL.2020 13:25:32

4.6.2.4 GFSK 2M_Lowest Channel

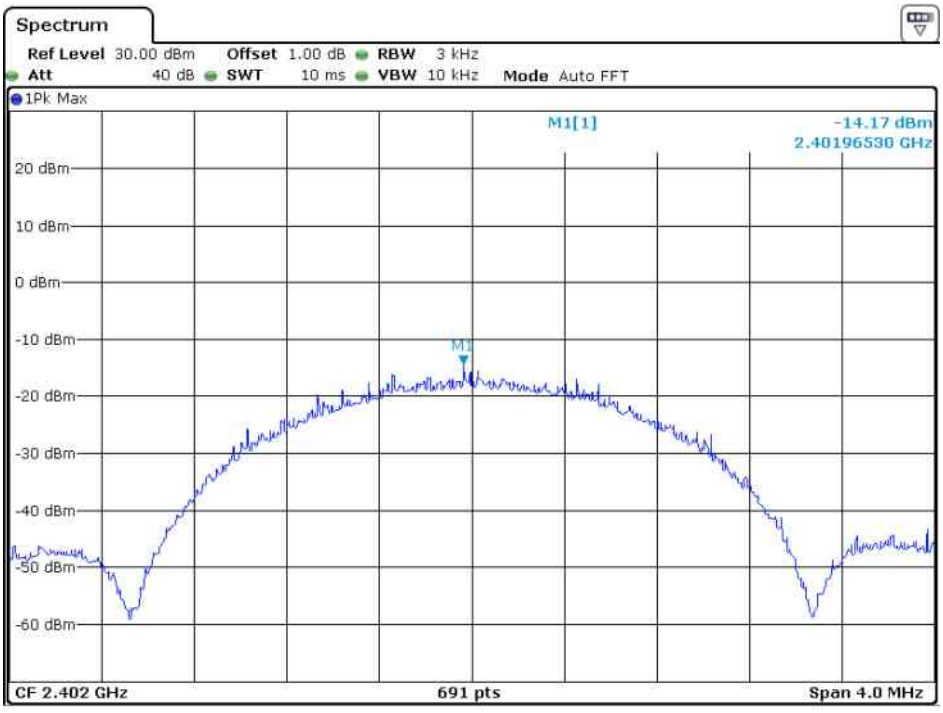

Date: 15.JUL.2020 13:19:00

4.6.2.5 GFSK 2M_Middle Channel

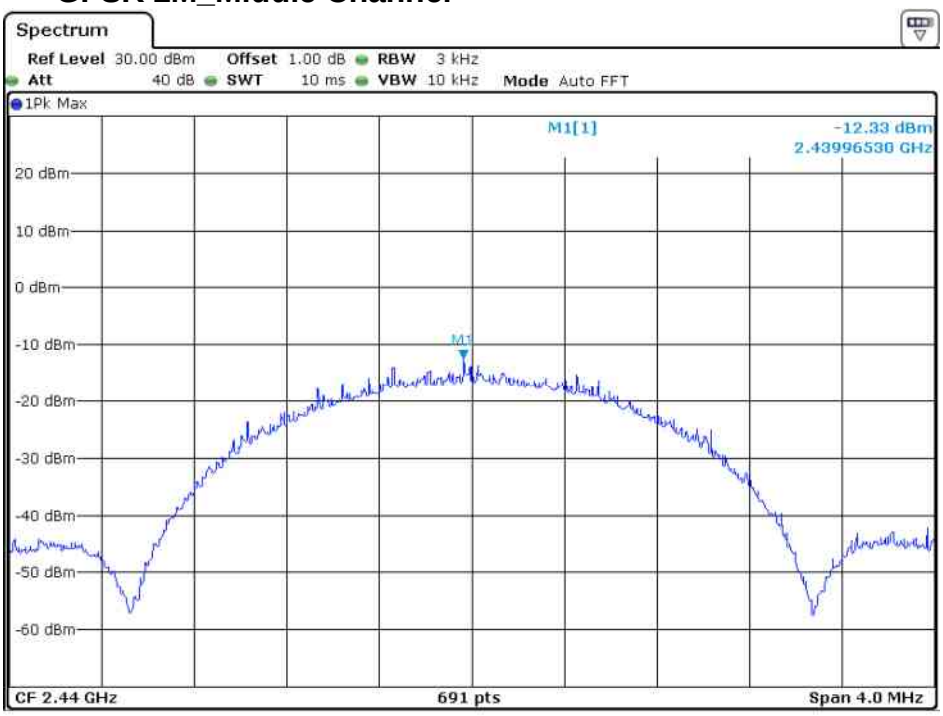

Date: 15.JUL.2020 13:21:27

4.6.2.6 GFSK 2M_Highest Channel

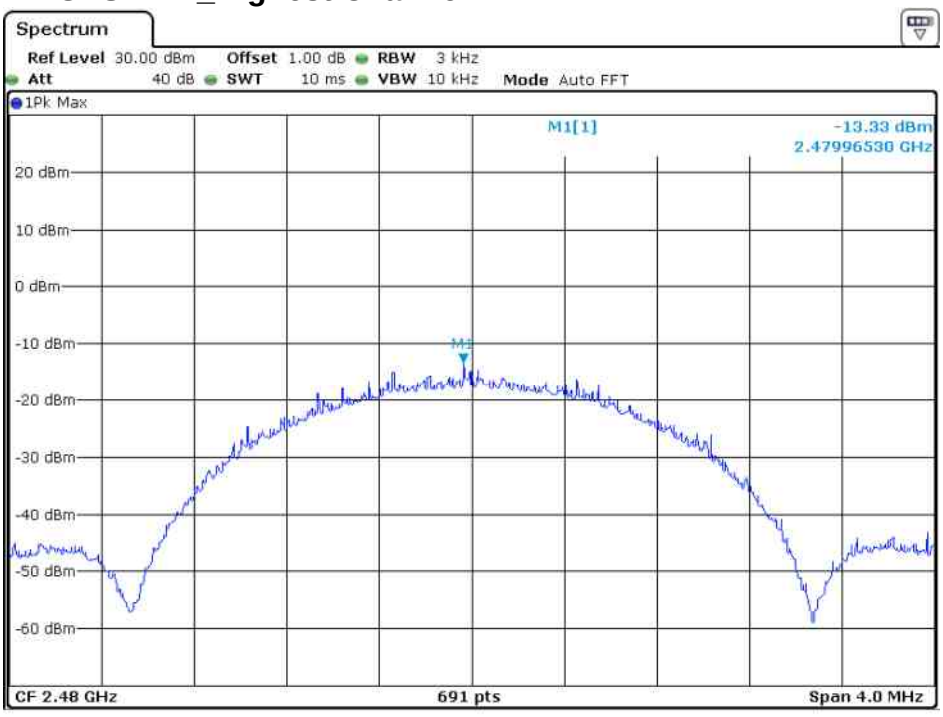

Date: 15.JUL.2020 13:22:23

4.7 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013 Section 11.13
Test Setup:	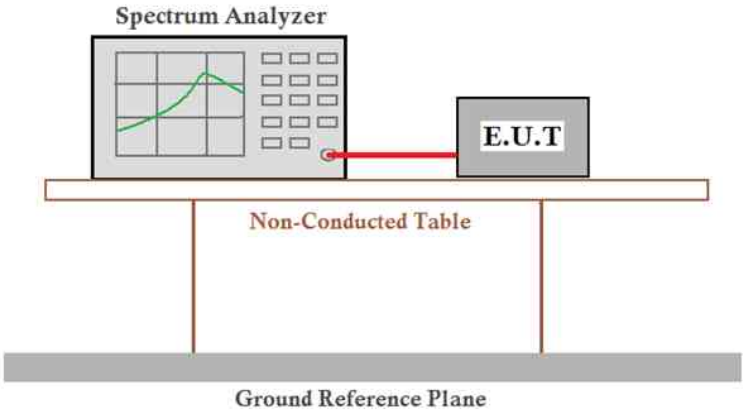
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Mode:	Transmitting with GFSK modulation.
Instruments Used:	Refer to section 5.10 for details.
Test Results:	Pass

4.7.1 Test plots

4.7.1.1 GFSK 1M_Lowest Channel

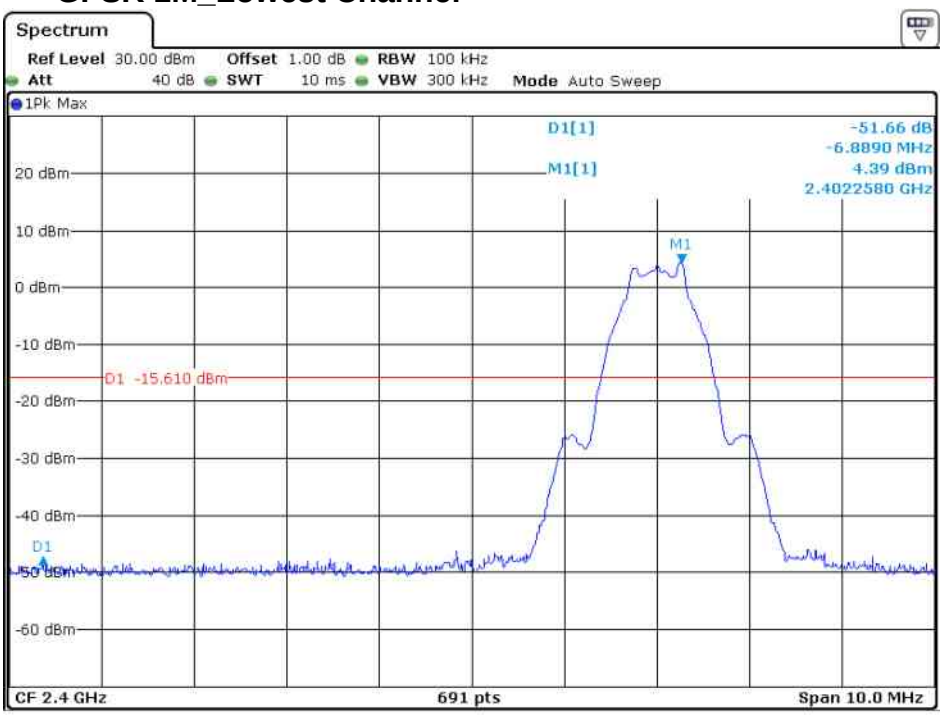

Date: 15.JUL.2020 13:28:44

4.7.1.2 GFSK 1M_Highest Channel

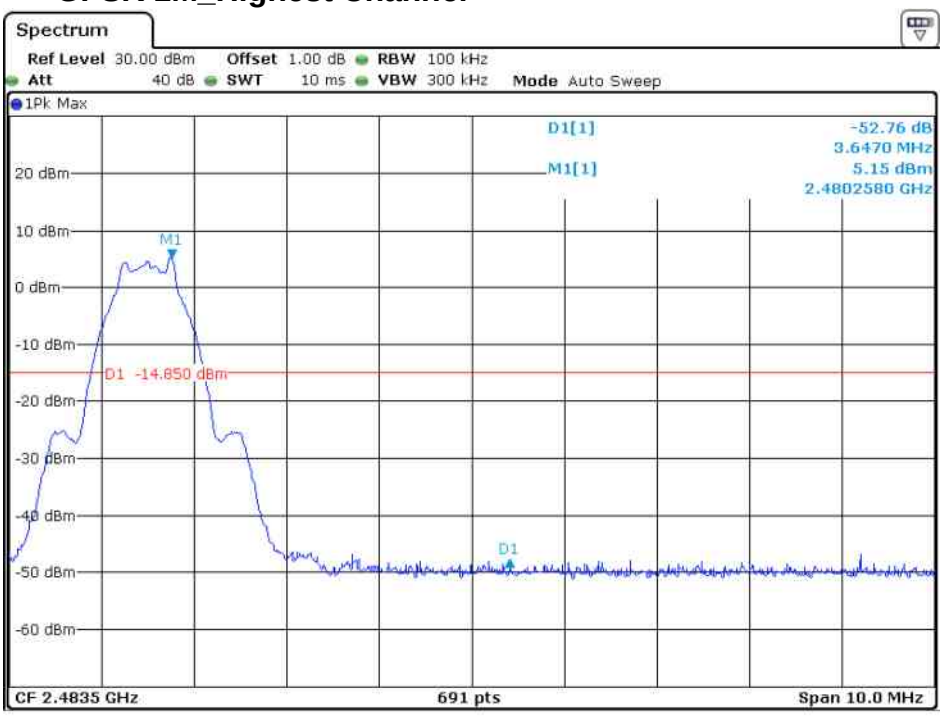

Date: 15.JUL.2020 13:24:16

4.7.1.3 GFSK 2M_Lowest Channel

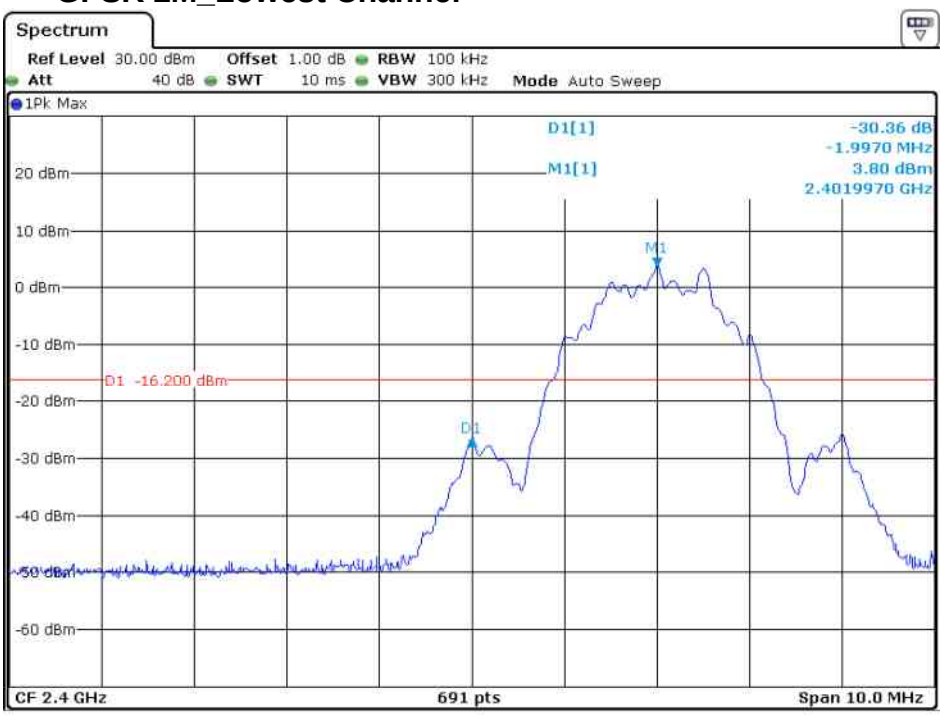

Date: 15.JUL.2020 13:20:04

4.7.1.4 GFSK 2M_Highest Channel

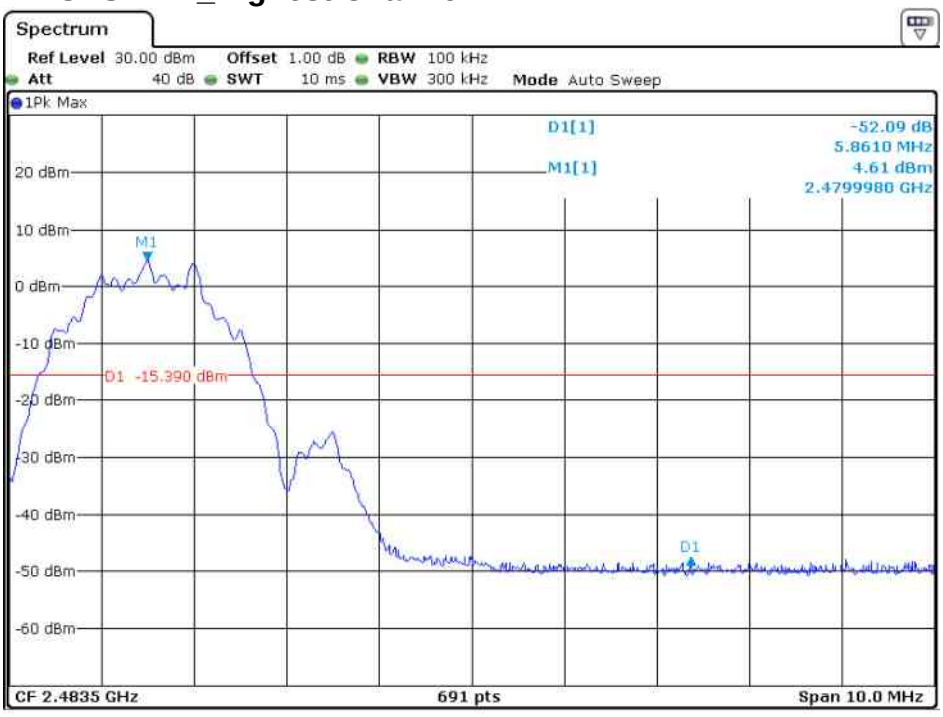

Date: 15.JUL.2020 13:23:30

4.8 Spurious RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10: 2013 Section 11.11
Test Setup:	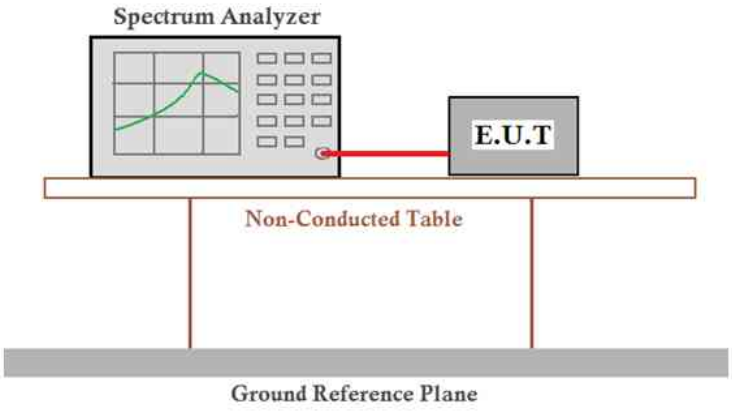
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Mode:	Transmitting with GFSK modulation.
Instruments Used:	Refer to section 5.10 for details.
Test Results:	Pass

4.8.1 Test plots:

4.8.1.1 GFSK 1M_Lowest Channel

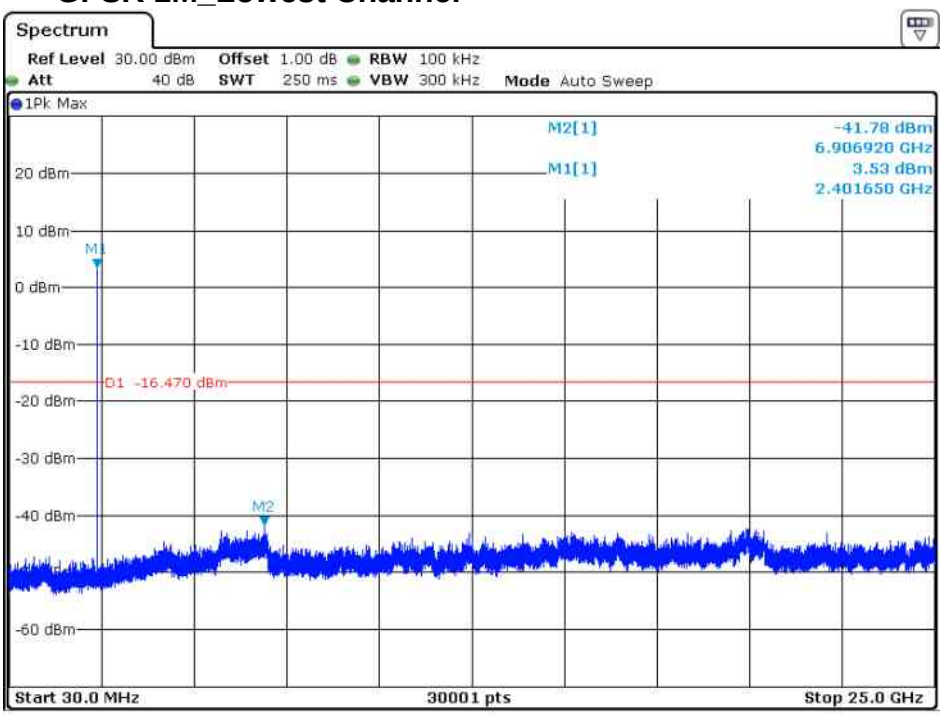

Date: 15.JUL.2020 13:30:46

4.8.1.2 GFSK 1M_Middle Channel

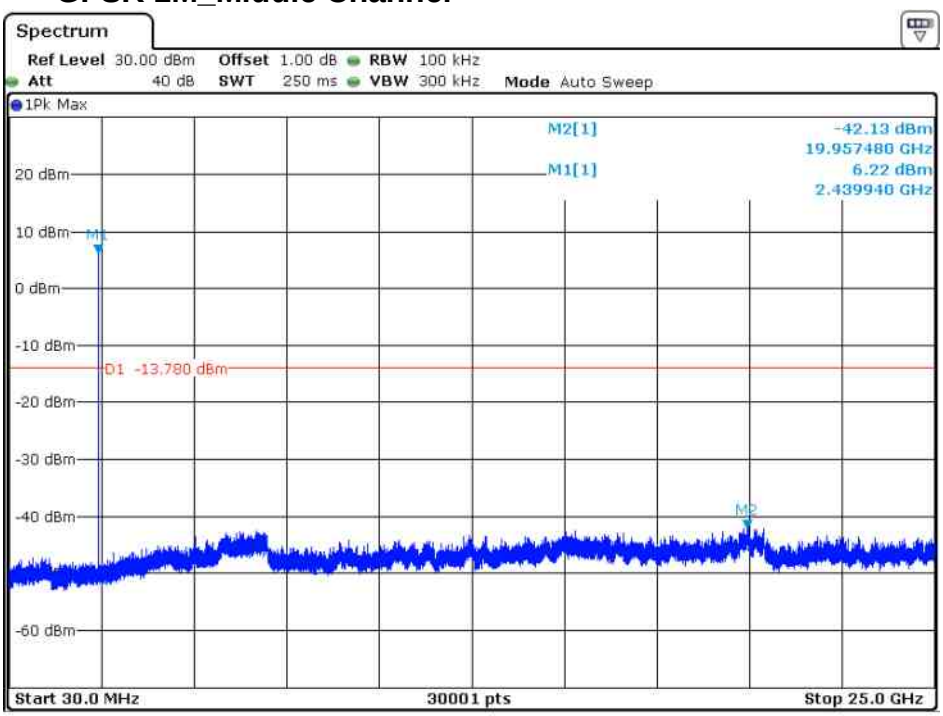

Date: 15.JUL.2020 13:32:03

4.8.1.3 GFSK 1M_Highest Channel

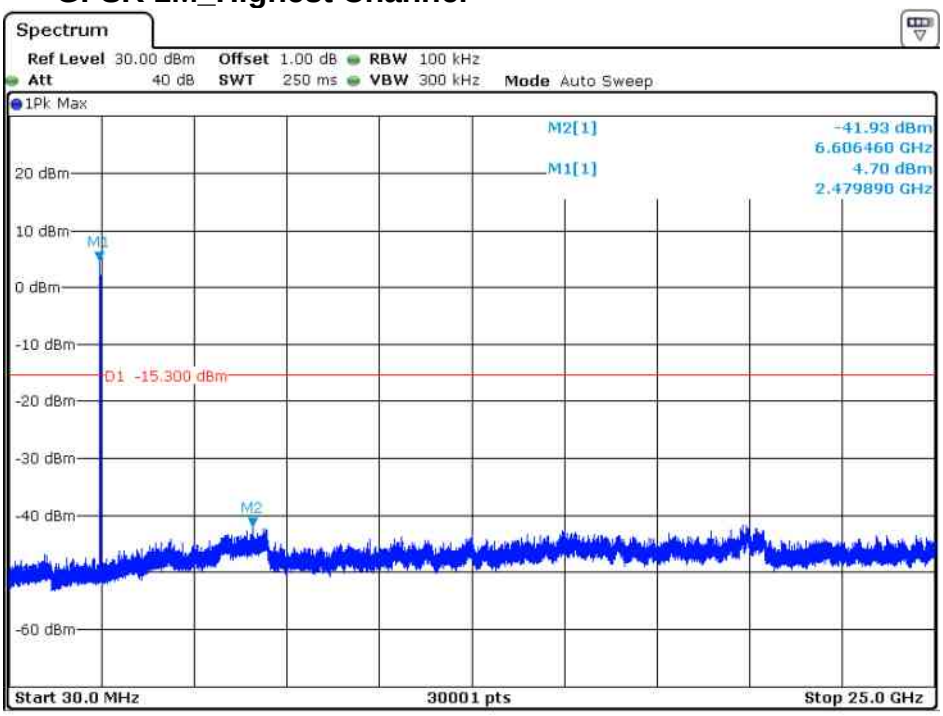

Date: 15.JUL.2020 13:33:04

4.8.1.4 GFSK 2M_Lowest Channel

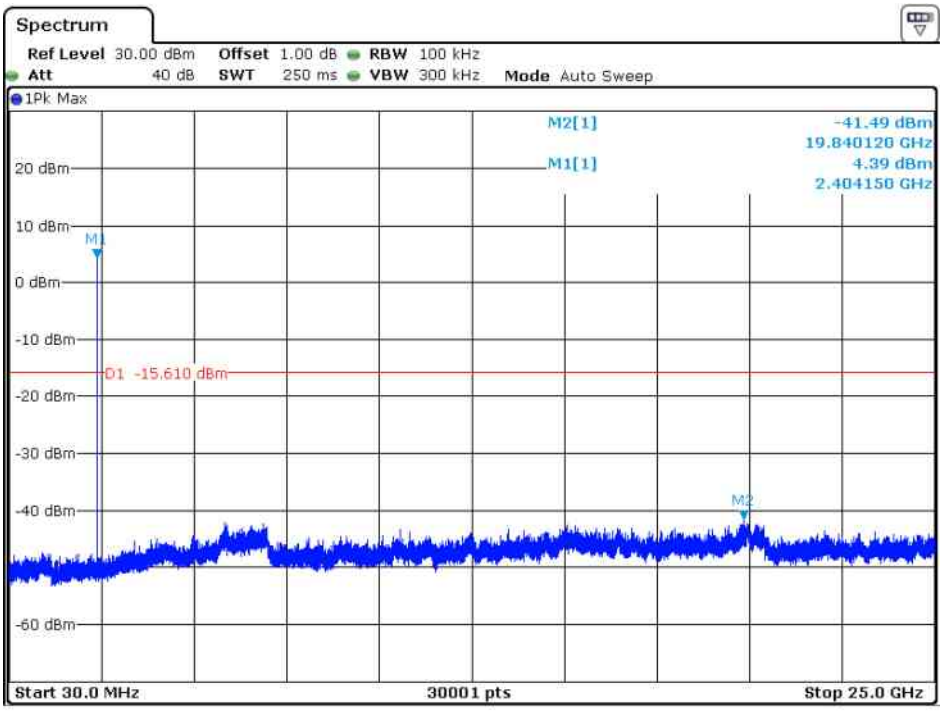

Date: 15.JUL.2020 13:37:25

4.8.1.5 GFSK 2M_Middle Channel

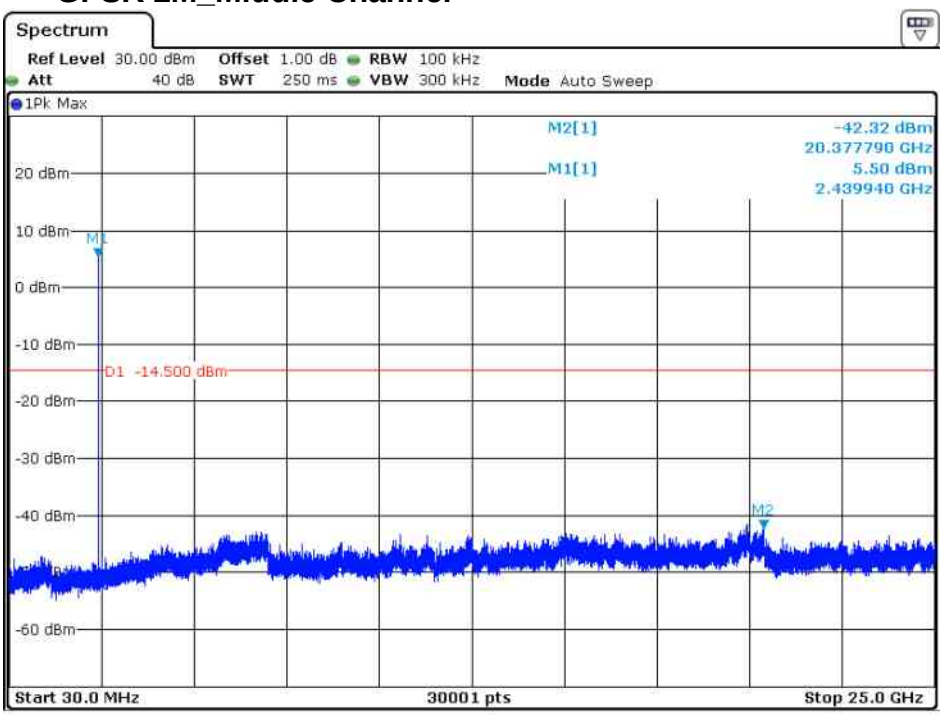

Date: 15.JUL.2020 13:36:00

4.8.1.6 GFSK 2M_Highest Channel

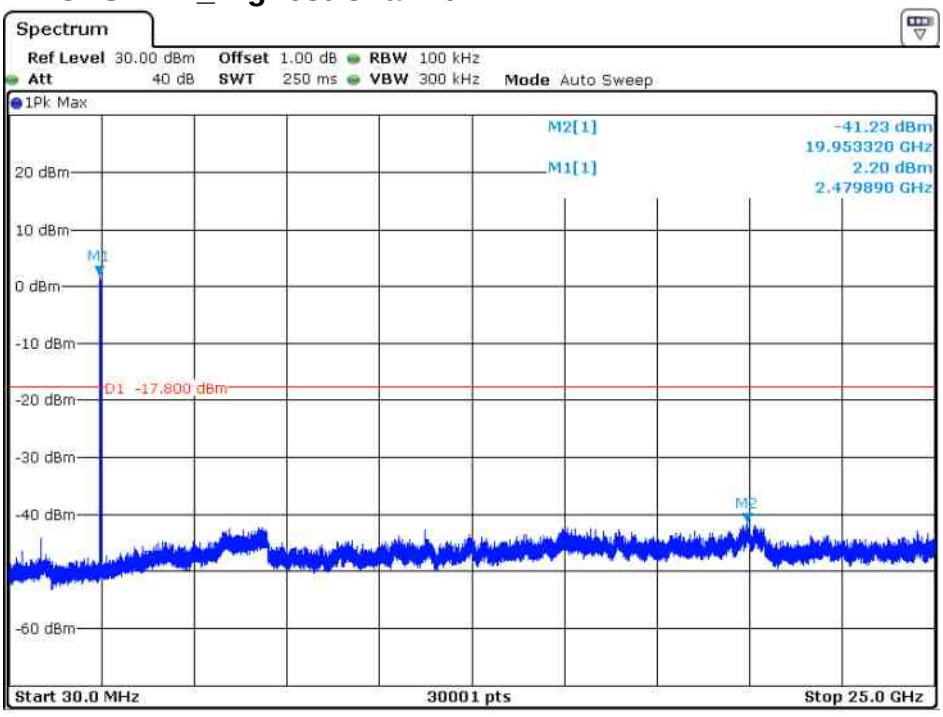

Date: 15.JUL.2020 13:34:51

Remark:
Scan from 9kHz to 25GHz, the disturbance between 9KHz to 30MHz was very low, and the above harmonics were the highest point could be found when testing, The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

4.9 Radiated Spurious Emission

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10 :2013 Section 11.12				
Test Site:	Measurement Distance: 3m or 10m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Remark: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

Test Setup:

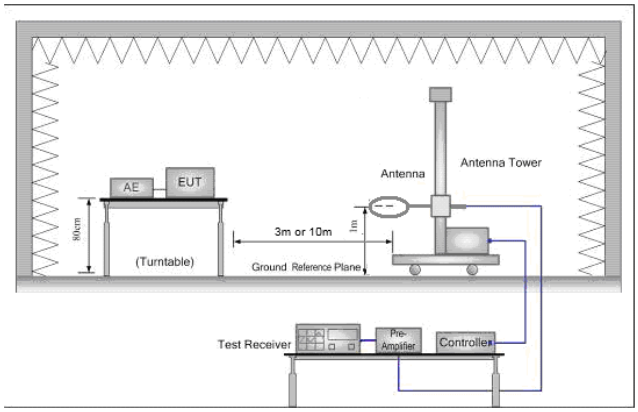

Figure 1. Below 30MHz

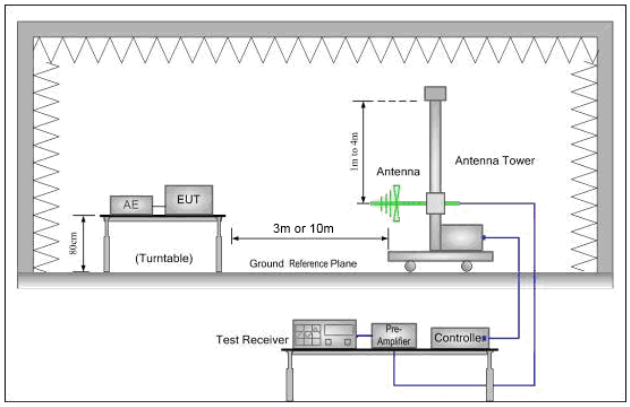

Figure 2. 30MHz to 1GHz

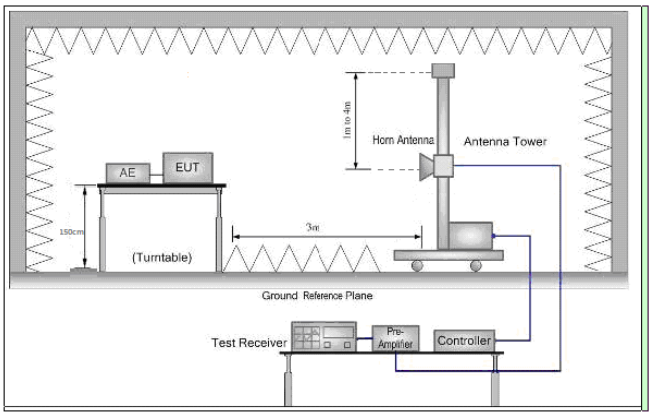

Figure 3. Above 1 GHz

Test Procedure:

a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.

c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

e. Use the following spectrum analyzer settings:

(1) Span shall wide enough to fully capture the emission being measured;

(2) Set RBW=100 kHz for f < 1 GHz, RBW=1MHz for f>1GHz ;
VBW≥ RBW; Sweep = auto;
Detector function = peak; Trace = max hold for peak

	(3) For average measurement: use duty cycle correction factor method per 15.35(c). Duty cycle = On time/100 milliseconds On time = N 1 *L 1 +N 2 *L 2 +...+N n-1 *LN n-1 +N n *L n Where N 1 is number of type 1 pulses, L 1 is length of type 1 pulses, etc. Average Emission Level = Peak Emission Level + 20*log(Duty cycle) f. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. g. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. h. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. i. Test the EUT in the lowest channel (2402MHz),the middle channel (2440MHz),the Highest channel (2480MHz) j. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. k. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with GFSK modulation. Charge + Transmitting mode.
Final Test Mode:	Transmitting with GFSK modulation. Pretest the EUT at Charge + Transmitting mode, For below 1GHz part, through pre-scan, the worst case is the lowest channel. Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details.
Test Results:	Pass

4.9.1 Radiated Emission below 1GHz

4.9.1.1 Charge + Transmitting, Vertical

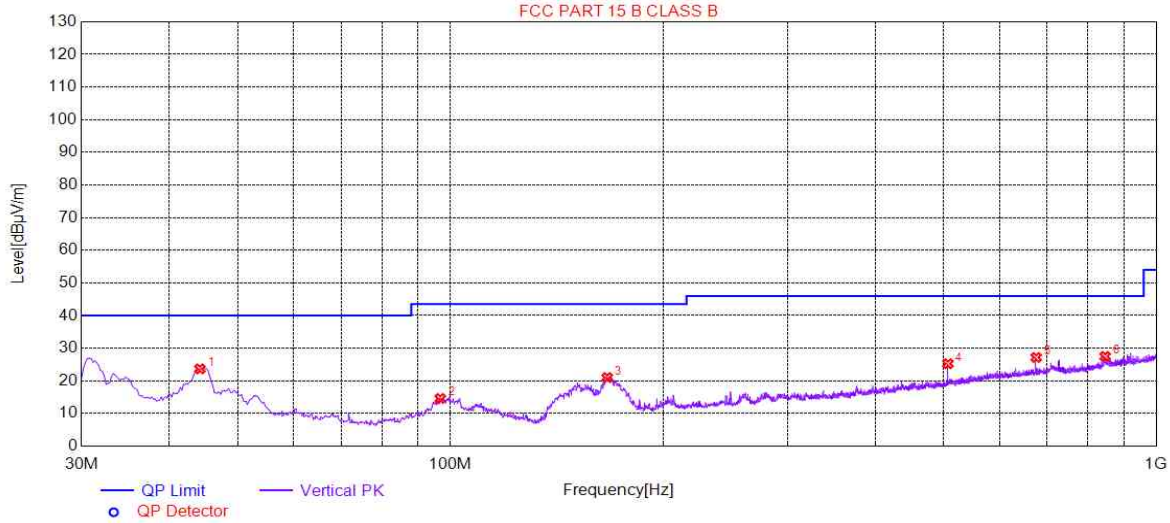

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	44.1648	23.69	-30.08	40.00	16.31	100	233	Vertical
2	96.7494	14.61	-32.58	43.50	28.89	100	99	Vertical
3	166.797	21.02	-34.23	43.50	22.48	100	340	Vertical
4	506.947	25.25	-23.14	46.00	20.75	100	346	Vertical
5	675.955	27.18	-19.76	46.00	18.82	100	157	Vertical
6	846.515	27.50	-16.94	46.00	18.50	100	304	Vertical

4.9.1.2 Charge + Transmitting, Horizontal

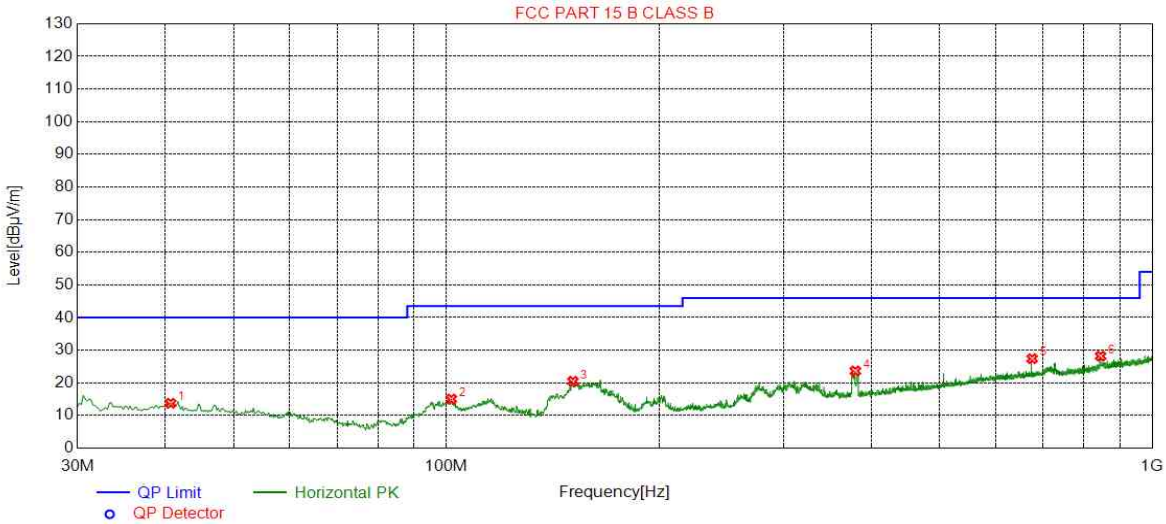

Suspected List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	40.6721	13.75	-28.62	40.00	26.25	200	156	Horizontal
2	101.600	15.05	-32.00	43.50	28.45	200	250	Horizontal
3	151.080	20.48	-35.03	43.50	23.02	200	221	Horizontal
4	379.657	23.65	-26.08	46.00	22.35	100	13	Horizontal
5	675.955	27.42	-19.76	46.00	18.58	100	16	Horizontal
6	845.157	28.20	-16.97	46.00	17.80	100	0	Horizontal

4.9.2 Transmitter Emission above 1GHz

4.9.2.1 GFSK 1M_Lowest Channel_ Horizontal

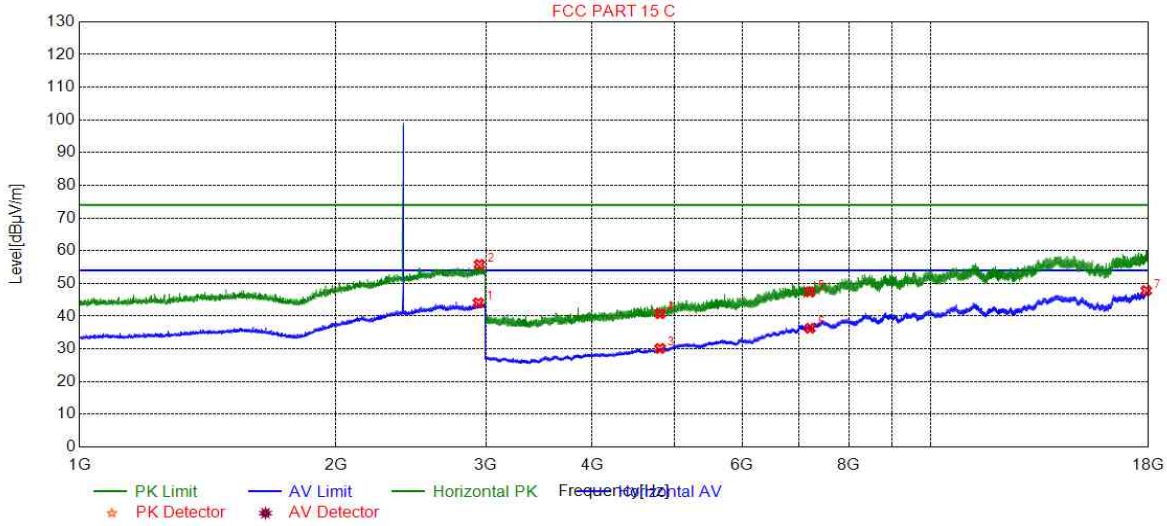

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2939.98	44.11	9.57	54.00	9.89	150	261	Horizontal
2	2948.98	55.80	9.67	74.00	18.20	150	3	Horizontal
3	4804.00	30.14	-18.30	54.00	23.86	150	288	Horizontal
4	4804.00	40.75	-18.30	74.00	33.25	150	261	Horizontal
5	7206.00	47.44	-10.09	74.00	26.56	150	218	Horizontal
6	7206.00	36.32	-10.09	54.00	17.68	150	318	Horizontal
7	17887.2	47.83	0.52	54.00	6.17	150	360	Horizontal

4.9.2.2 GFSK 1M_Lowest Channel_ Vertical

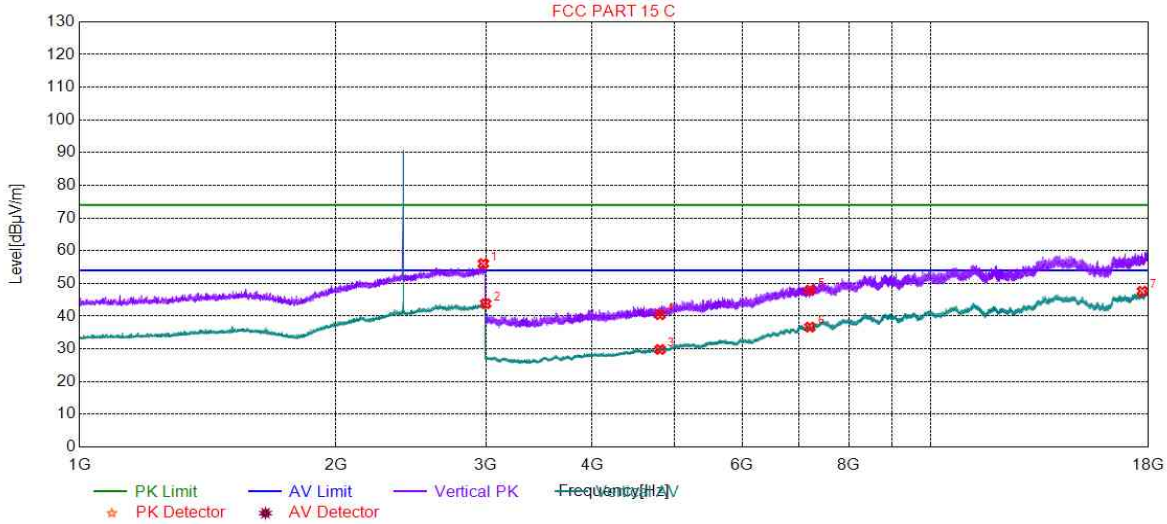

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2980.49	56.10	9.54	74.00	17.90	150	112	Vertical
2	2998.99	43.82	9.45	54.00	10.18	150	98	Vertical
3	4804.00	29.83	-18.30	54.00	24.17	150	17	Vertical
4	4804.00	40.45	-18.30	74.00	33.55	150	17	Vertical
5	7206.00	47.99	-10.09	74.00	26.01	150	318	Vertical
6	7206.00	36.66	-10.09	54.00	17.34	150	18	Vertical
7	17702.4	47.62	1.31	54.00	6.38	150	68	Vertical

4.9.2.3 GFSK 1M_Middle Channel_ Horizontal

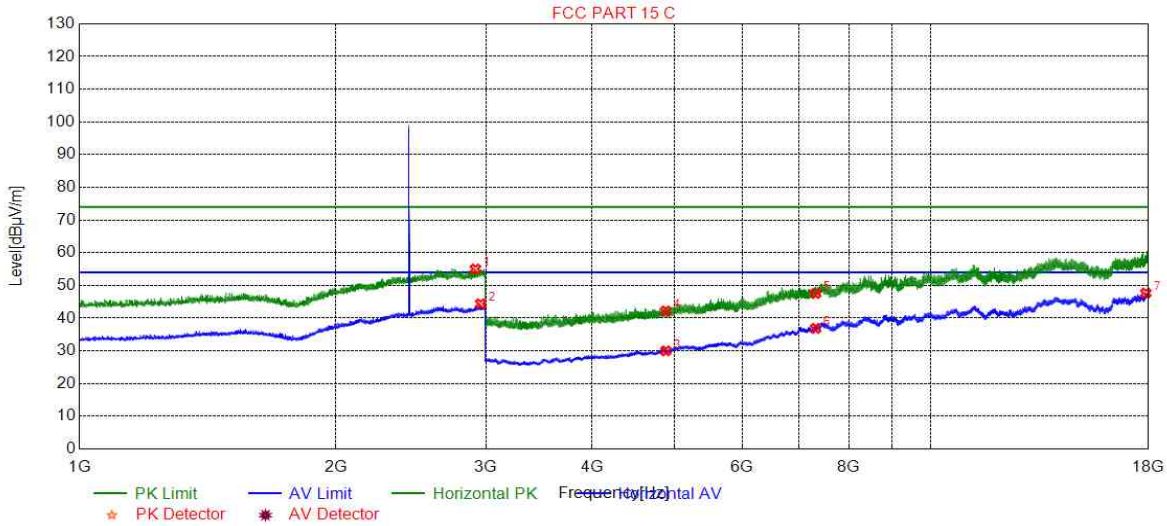

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2916.47	55.05	9.32	74.00	18.95	150	42	Horizontal
2	2958.98	44.39	9.64	54.00	9.61	150	342	Horizontal
3	4880.00	30.01	-17.97	54.00	23.99	150	86	Horizontal
4	4880.00	42.22	-17.97	74.00	31.78	150	250	Horizontal
5	7320.00	47.56	-9.72	74.00	26.44	150	69	Horizontal
6	7320.00	36.89	-9.72	54.00	17.11	150	119	Horizontal
7	17867.4	47.68	0.26	54.00	6.32	150	18	Horizontal

4.9.2.4 GFSK 1M_Middle Channel_ Vertical

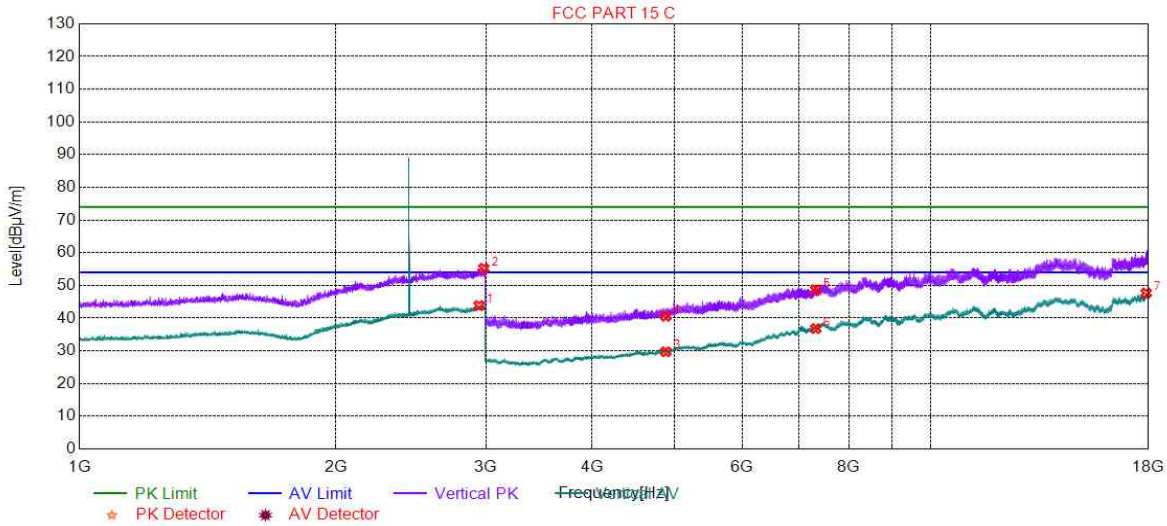

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2945.98	43.87	9.64	54.00	10.13	150	360	Vertical
2	2983.99	55.24	9.52	74.00	18.76	150	100	Vertical
3	4880.00	29.75	-17.97	54.00	24.25	150	43	Vertical
4	4880.00	40.61	-17.97	74.00	33.39	150	342	Vertical
5	7320.00	48.67	-9.72	74.00	25.33	150	318	Vertical
6	7320.00	36.83	-9.72	54.00	17.17	150	318	Vertical
7	17884.4	47.70	0.49	54.00	6.30	150	118	Vertical

4.9.2.5 GFSK 1M_Highest Channel_ Horizontal

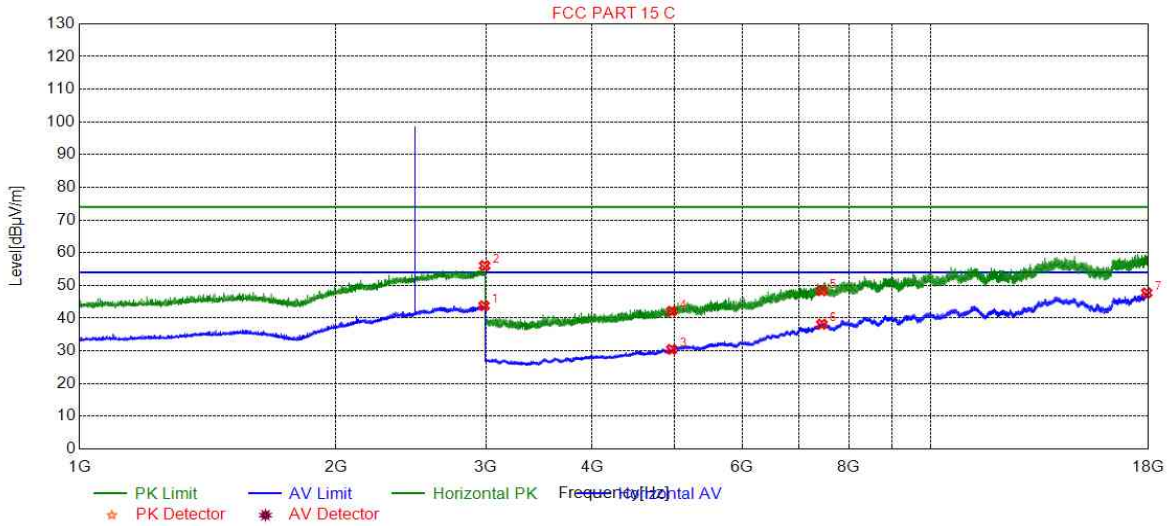

Suspected List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2985.49	43.81	9.52	54.00	10.19	150	342	Horizontal
2	2990.49	56.07	9.49	74.00	17.93	150	274	Horizontal
3	4960.00	30.45	-17.47	54.00	23.55	150	206	Horizontal
4	4960.00	42.16	-17.47	74.00	31.84	150	206	Horizontal
5	7440.00	48.38	-9.35	74.00	25.62	150	68	Horizontal
6	7440.00	38.15	-9.35	54.00	15.85	150	219	Horizontal
7	17908.6	47.74	0.69	54.00	6.26	150	169	Horizontal

4.9.2.6 GFSK 1M_Highest Channel_ Vertical

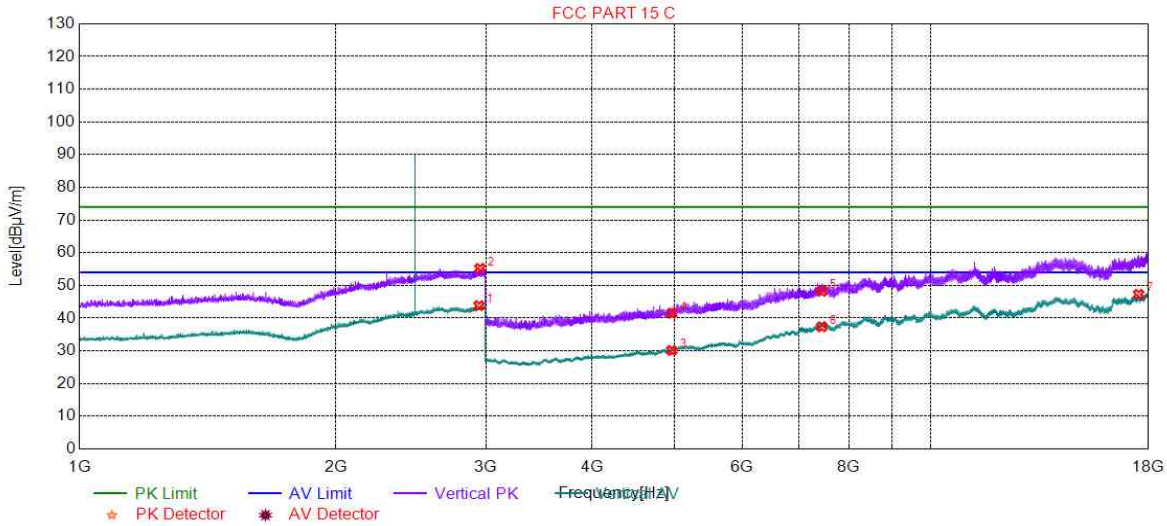

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2945.98	43.83	9.64	54.00	10.17	150	210	Vertical
2	2952.48	55.23	9.67	74.00	18.77	150	59	Vertical
3	4960.00	30.12	-17.47	54.00	23.88	150	69	Vertical
4	4960.00	41.48	-17.47	74.00	32.52	150	151	Vertical
5	7440.00	48.20	-9.35	74.00	25.80	150	267	Vertical
6	7440.00	37.37	-9.35	54.00	16.63	150	18	Vertical
7	17521.4	47.28	1.00	54.00	6.72	150	118	Vertical

4.9.2.7 GFSK 2M_Lowest Channel_ Horizontal

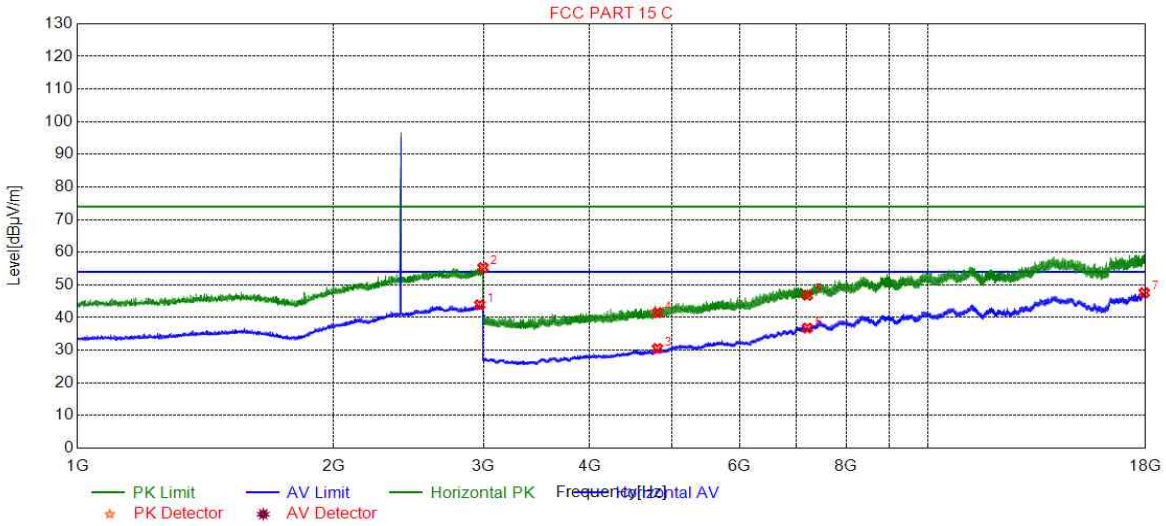

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2969.99	43.93	9.59	54.00	10.07	150	315	Horizontal
2	2996.99	55.31	9.46	74.00	18.69	150	0	Horizontal
3	4804.00	30.53	-18.30	54.00	23.47	150	309	Horizontal
4	4804.00	41.51	-18.30	74.00	32.49	150	64	Horizontal
5	7206.00	46.82	-10.09	74.00	27.18	150	118	Horizontal
6	7206.00	36.79	-10.09	54.00	17.21	150	267	Horizontal
7	17931.2	47.61	0.70	54.00	6.39	150	359	Horizontal

4.9.2.8 GFSK 2M_Lowest Channel_ Vertical

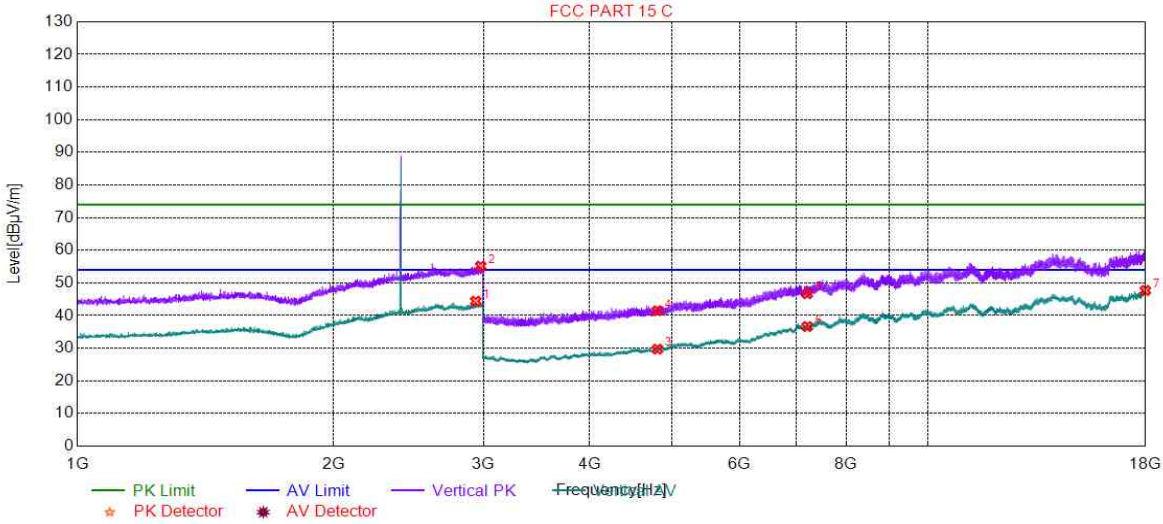

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2938.48	44.40	9.56	54.00	9.60	150	266	Vertical
2	2977.99	55.17	9.55	74.00	18.83	150	45	Vertical
3	4804.00	29.73	-18.30	54.00	24.27	150	43	Vertical
4	4804.00	41.49	-18.30	74.00	32.51	150	43	Vertical
5	7206.00	46.69	-10.09	74.00	27.31	150	119	Vertical
6	7206.00	36.64	-10.09	54.00	17.36	150	119	Vertical
7	17987.3	47.70	0.72	54.00	6.30	150	217	Vertical

4.9.2.9 GFSK 2M_Middle Channel_ Horizontal

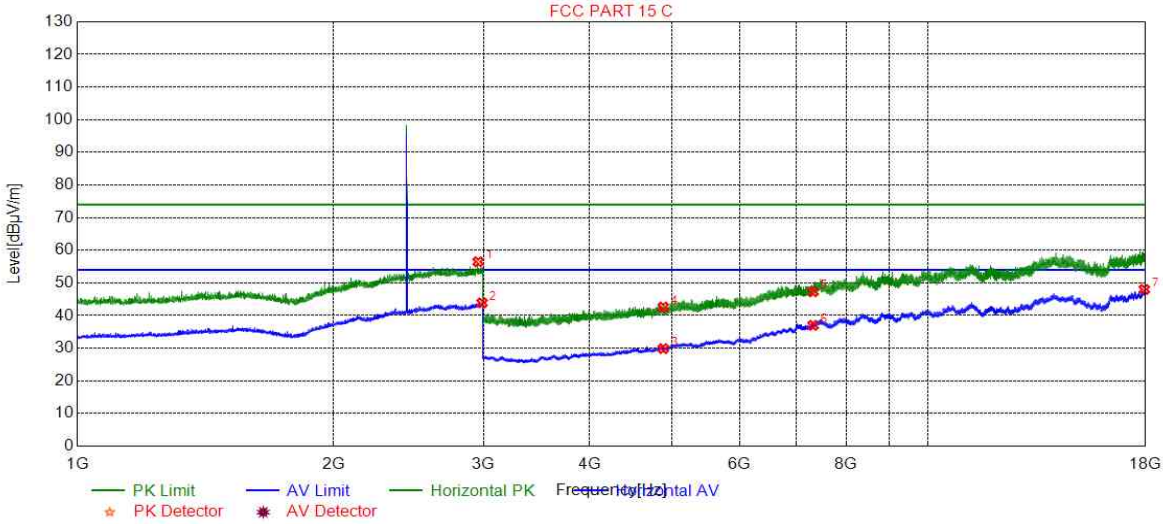

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2957.48	56.49	9.65	74.00	17.51	150	342	Horizontal
2	2989.49	43.89	9.50	54.00	10.11	150	301	Horizontal
3	4880.00	29.90	-17.97	54.00	24.10	150	342	Horizontal
4	4880.00	42.63	-17.97	74.00	31.37	150	205	Horizontal
5	7320.00	47.32	-9.72	74.00	26.68	150	68	Horizontal
6	7320.00	37.03	-9.72	54.00	16.97	150	269	Horizontal
7	17935.6	48.02	0.70	54.00	5.98	150	118	Horizontal

4.9.2.10 GFSK 2M_Middle Channel_ Vertical

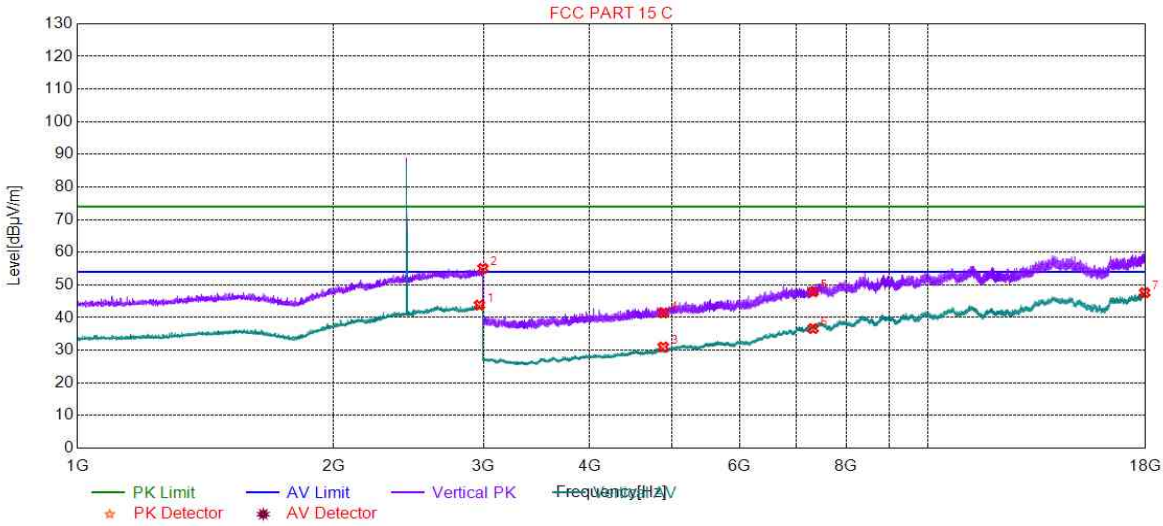

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2967.99	43.84	9.60	54.00	10.16	150	304	Vertical
2	2996.99	55.06	9.46	74.00	18.94	150	236	Vertical
3	4880.00	31.00	-17.97	54.00	23.00	150	179	Vertical
4	4880.00	41.43	-17.97	74.00	32.57	150	342	Vertical
5	7320.00	47.88	-9.72	74.00	26.12	150	118	Vertical
6	7320.00	36.63	-9.72	54.00	17.37	150	18	Vertical
7	17952.6	47.64	0.71	54.00	6.36	150	318	Vertical

4.9.2.11 GFSK 2M_Highest Channel_ Horizontal

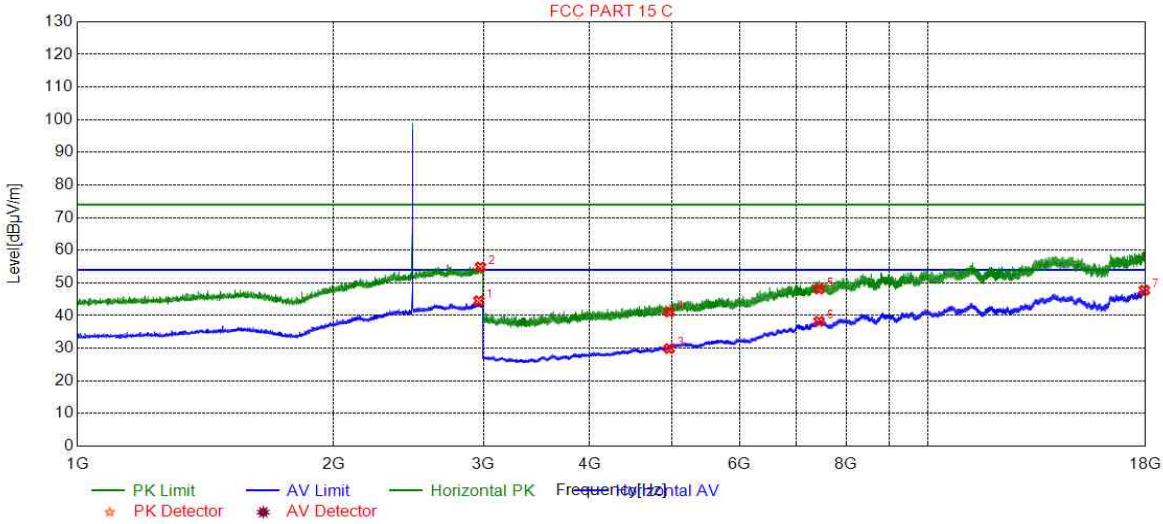

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2962.99	44.55	9.62	54.00	9.45	150	316	Horizontal
2	2975.49	54.88	9.56	74.00	19.12	150	328	Horizontal
3	4960.00	29.89	-17.47	54.00	24.11	150	288	Horizontal
4	4960.00	41.12	-17.47	74.00	32.88	150	179	Horizontal
5	7440.00	48.15	-9.35	74.00	25.85	150	68	Horizontal
6	7440.00	38.24	-9.35	54.00	15.76	150	219	Horizontal
7	17937.2	47.76	0.70	54.00	6.24	150	118	Horizontal

4.9.2.12 GFSK 2M_Highest Channel_ Vertical

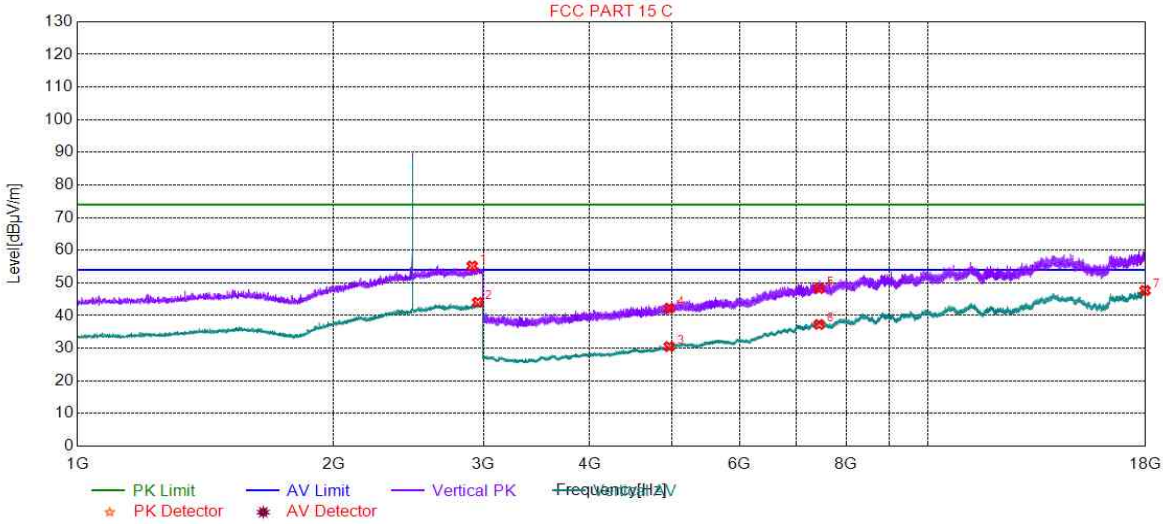

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2910.47	55.19	9.25	74.00	18.81	150	72	Vertical
2	2954.48	44.07	9.66	54.00	9.93	150	248	Vertical
3	4960.00	30.51	-17.47	54.00	23.49	150	98	Vertical
4	4960.00	42.28	-17.47	74.00	31.72	150	70	Vertical
5	7440.00	48.29	-9.35	74.00	25.71	150	318	Vertical
6	7440.00	37.29	-9.35	54.00	16.71	150	118	Vertical
7	17972.4	47.70	0.71	54.00	6.30	150	68	Vertical

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
   Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
2) Scan from 9kHz to 25GHz, the disturbance between 9KHz to 30MHz was very low, and the above harmonics were the highest point could be found when testing, The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.
4) All Modes have been tested, but only the worst case data displayed in this report.

4.10 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205		
Test Method:	ANSI C63.10: 2013 Section 11.12		
Test Site:	Measurement Distance: 3m or 10m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m @3m)	Remark
	30MHz-88MHz	40.0	Quasi-peak Value
	88MHz-216MHz	43.5	Quasi-peak Value
	216MHz-960MHz	46.0	Quasi-peak Value
	960MHz-1GHz	54.0	Quasi-peak Value
	Above 1GHz	54.0	Average Value
		74.0	Peak Value
Test Setup:			

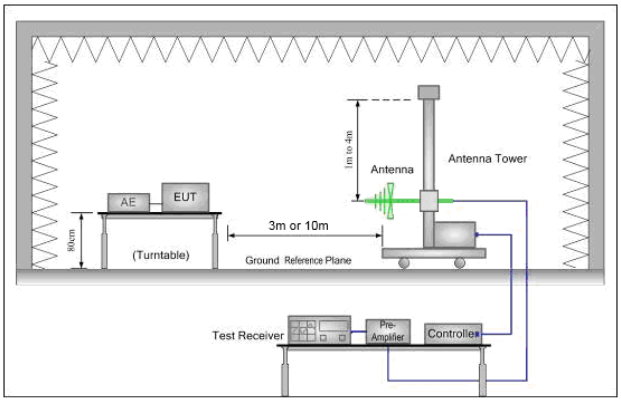

Figure 1. 30MHz to 1GHz

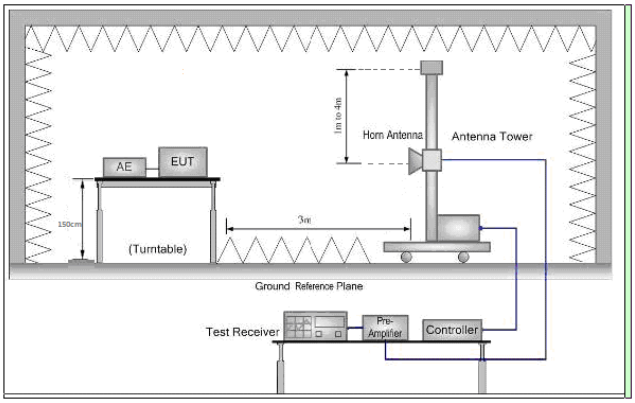

Figure 2. Above 1 GHz

Test Procedure:	a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel h. Test the EUT in the lowest channel, the Highest channel

	i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. j. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with GFSK modulation. Charge + Transmitting mode.
Final Test Mode:	Transmitting with GFSK modulation. Pretest the EUT at Charge + Transmitting mode. Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details.
Test Results:	Pass

4.10.1 Test plots

4.10.1.1 Worst Case Mode (GFSK) 1M_Lowest Channel_ Horizontal

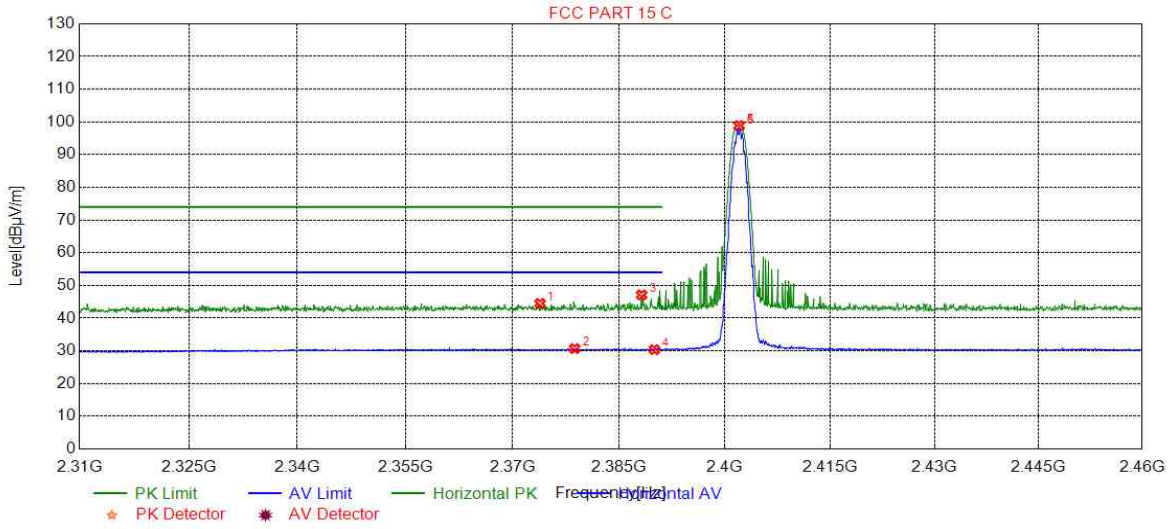

Suspected List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2373.85	44.49	7.79	74.00	29.51	150	144	Horizontal
2	2378.73	30.71	7.78	54.00	23.29	150	326	Horizontal
3	2388.18	47.14	7.77	74.00	26.86	150	298	Horizontal
4	2390.00	30.37	7.77	54.00	23.63	150	225	Horizontal
5	2402.00	98.89	7.77	0.00	-98.89	150	209	Horizontal
6	2402.00	98.43	7.77	0.00	-98.43	150	209	Horizontal

4.10.1.2 Worst Case Mode (GFSK) 1M_Lowest Channel_ Vertical

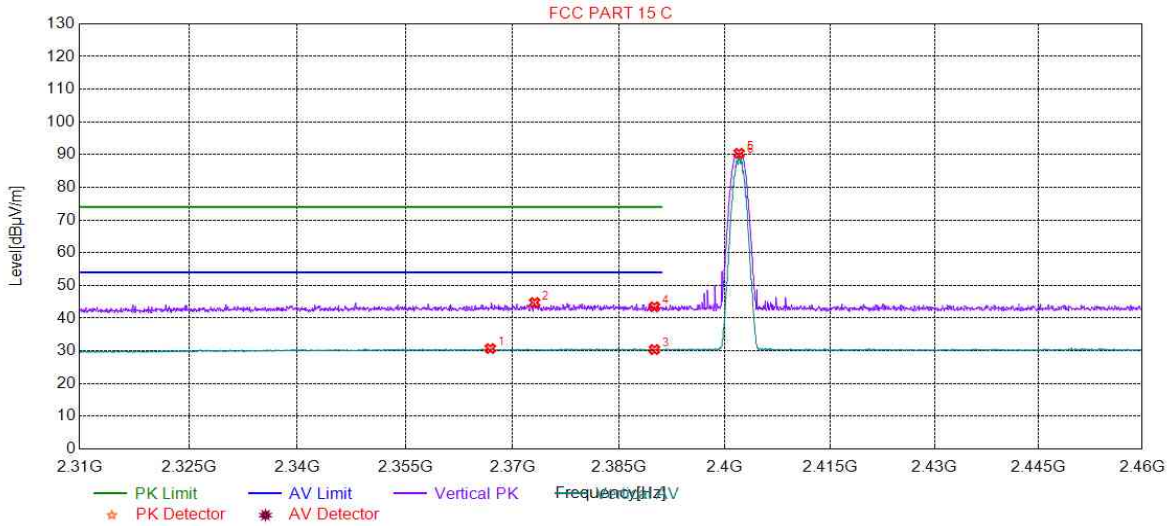

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2366.87	30.72	7.79	54.00	23.28	150	30	Vertical
2	2373.10	44.78	7.79	74.00	29.22	150	322	Vertical
3	2390.00	30.42	7.77	54.00	23.58	150	295	Vertical
4	2390.00	43.48	7.77	74.00	30.52	150	14	Vertical
5	2402.00	90.43	7.77	0.00	-90.43	150	224	Vertical
6	2402.00	89.79	7.77	0.00	-89.79	150	219	Vertical

4.10.1.3 Worst Case Mode (GFSK) 1M_Highest Channel_ Horizontal

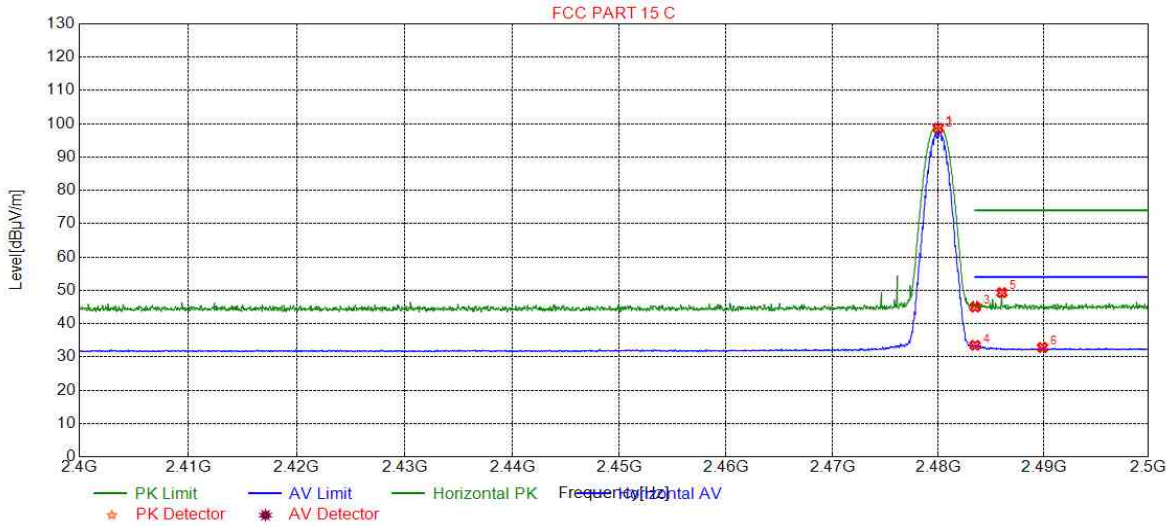

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2480.00	98.70	8.01	0.00	-98.70	150	209	Horizontal
2	2480.00	98.22	8.01	0.00	-98.22	150	214	Horizontal
3	2483.50	44.98	8.01	74.00	29.02	150	203	Horizontal
4	2483.50	33.50	8.01	54.00	20.50	150	214	Horizontal
5	2486.04	49.31	8.01	74.00	24.69	150	335	Horizontal
6	2489.89	32.84	8.02	54.00	21.16	150	23	Horizontal

4.10.1.4 Worst Case Mode (GFSK) 1M_Highest Channel_ Vertical

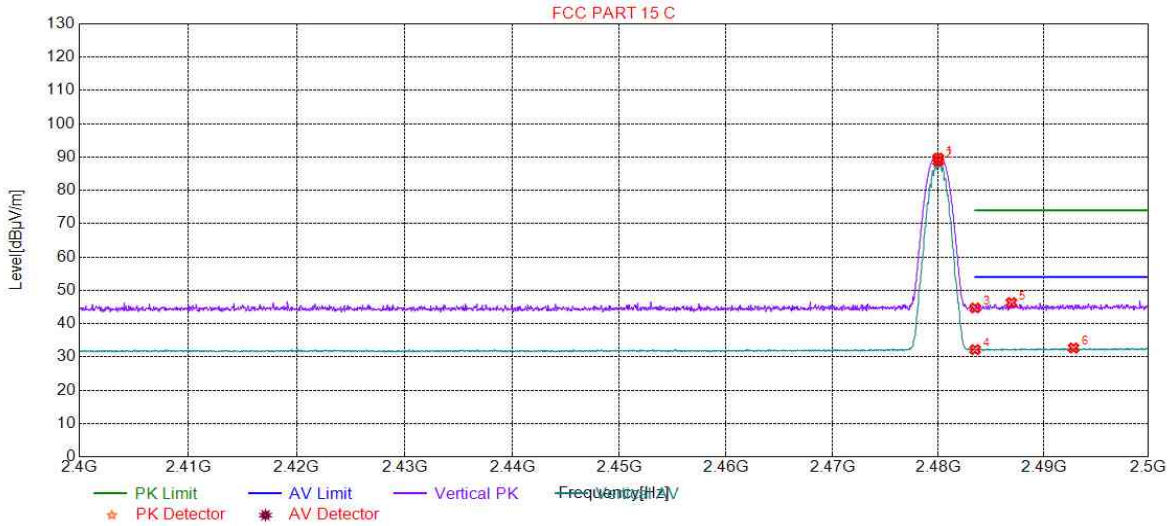

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2480.00	89.73	8.01	0.00	-89.73	150	226	Vertical
2	2480.00	88.70	8.01	0.00	-88.70	150	330	Vertical
3	2483.50	44.71	8.01	74.00	29.29	150	101	Vertical
4	2483.50	32.21	8.01	54.00	21.79	150	324	Vertical
5	2486.94	46.33	8.01	74.00	27.67	150	324	Vertical
6	2492.84	32.70	8.02	54.00	21.30	150	68	Vertical

4.10.1.5 Worst Case Mode (GFSK) 2M_Lowest Channel_ Horizontal

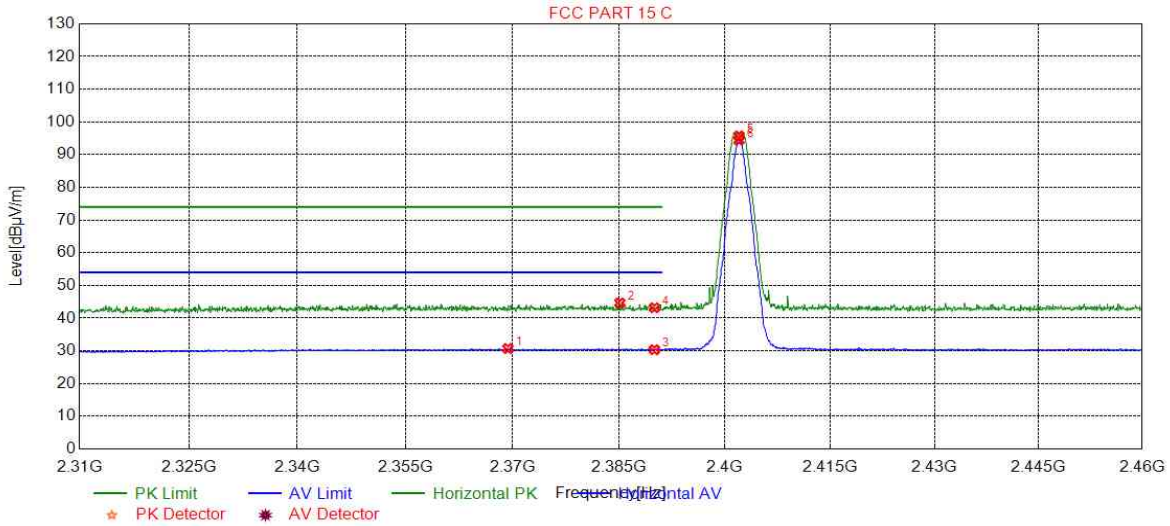

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2369.35	30.72	7.79	54.00	23.28	150	178	Horizontal
2	2385.11	44.67	7.77	74.00	29.33	150	96	Horizontal
3	2390.00	30.37	7.77	54.00	23.63	150	151	Horizontal
4	2390.00	43.19	7.77	74.00	30.81	150	255	Horizontal
5	2402.00	95.75	7.77	0.00	-95.75	150	206	Horizontal
6	2402.00	94.41	7.77	0.00	-94.41	150	206	Horizontal

4.10.1.6 Worst Case Mode (GFSK) 2M_Lowest Channel_ Vertical

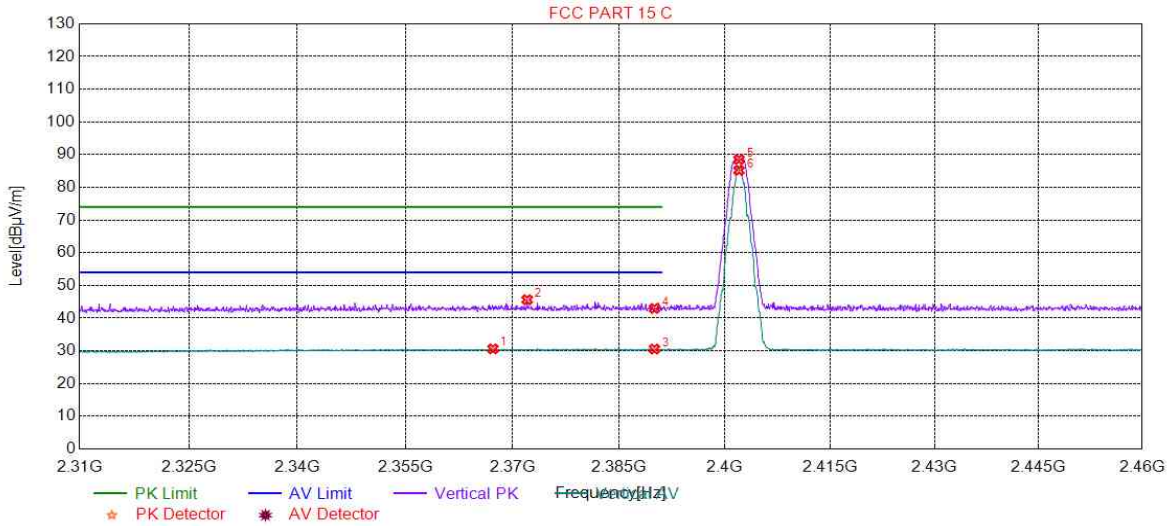

Suspected List

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2367.25	30.62	7.79	54.00	23.38	150	220	Vertical
2	2372.05	45.65	7.79	74.00	28.35	150	24	Vertical
3	2390.00	30.57	7.77	54.00	23.43	150	264	Vertical
4	2390.00	42.99	7.77	74.00	31.01	150	62	Vertical
5	2402.00	88.54	7.77	0.00	-88.54	150	335	Vertical
6	2402.00	85.19	7.77	0.00	-85.19	150	40	Vertical

4.10.1.7 Worst Case Mode (GFSK) 2M_Highest Channel_ Horizontal

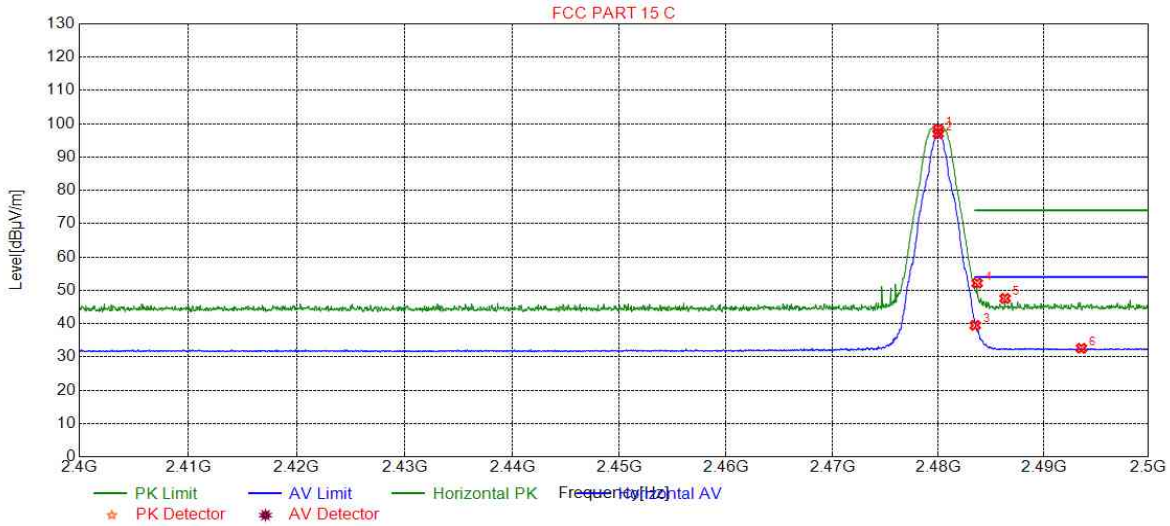

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2480.00	98.32	8.01	0.00	-98.32	150	210	Horizontal
2	2480.00	97.02	8.01	0.00	-97.02	150	216	Horizontal
3	2483.50	39.50	8.01	54.00	14.50	150	216	Horizontal
4	2483.69	52.16	8.01	74.00	21.84	150	346	Horizontal
5	2486.34	47.58	8.01	74.00	26.42	150	303	Horizontal
6	2493.59	32.60	8.02	54.00	21.40	150	194	Horizontal

4.10.1.8 Worst Case Mode (GFSK) 2M_Highest Channel_ Vertical

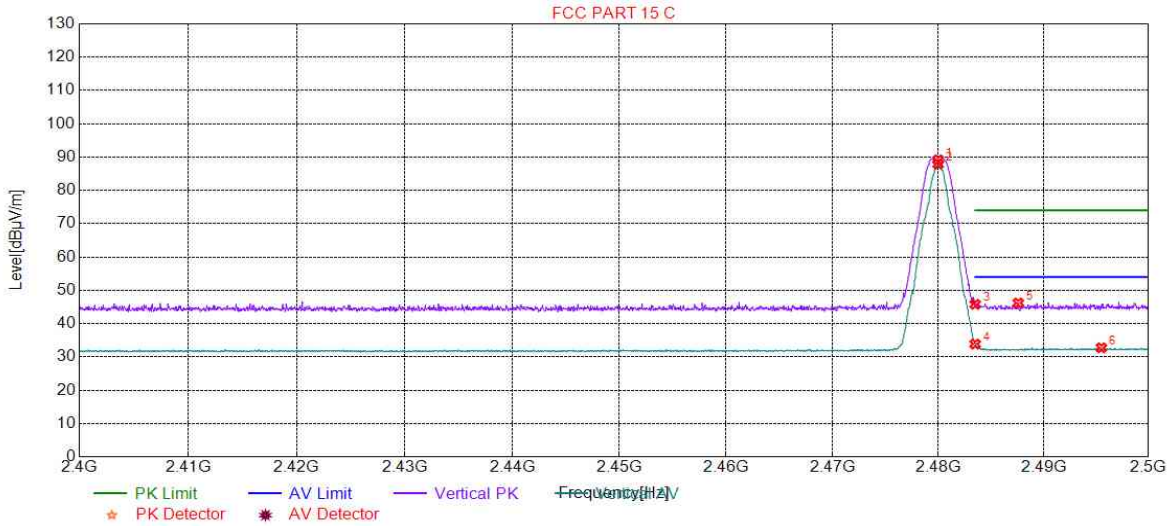

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2480.00	89.19	8.01	0.00	-89.19	150	230	Vertical
2	2480.00	87.89	8.01	0.00	-87.89	150	224	Vertical
3	2483.50	45.81	8.01	74.00	28.19	150	332	Vertical
4	2483.50	33.89	8.01	54.00	20.11	150	343	Vertical
5	2487.59	46.22	8.02	74.00	27.78	150	113	Vertical
6	2495.49	32.77	8.02	54.00	21.23	150	235	Vertical

Remark:
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
All Modes have been tested, but only the worst case data displayed in this report.

5 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Total RF power, conducted	±0.75dB
2	RF power density, conducted	±2.84dB
3	Spurious emissions, conducted	±0.75dB
4	Radiated Spurious emission test	±4.5dB (30MHz-1GHz)
		±4.8dB (1GHz-25GHz)
5	Conduct emission test	±3.12 dB(9KHz- 30MHz)
6	Temperature test	±1˚C
7	Humidity test	±3%
8	DC and low frequency voltages	±0.5%

6 Equipment List

Conducted Emission					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Duedate (yyyy-mm-dd)
Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2020/5/10	2023/5/9
LISN	Rohde & Schwarz	ENV216	SEM007-01	2020/7/14	2021/7/14
LISN	ETS-LINDGREN	Feb-16	SEM007-02	2020/4/1	2021/3/31
Measurement Software	AUDIX	e3 V5.4.1221d	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM024-01	2020/6/12	2021/6/11
2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T2-02	EMC0122	2020/2/11	2021/2/10
EMI Test Receiver	Rohde & Schwarz	ESCI	SEM004-02	2020/3/2	2021/3/1

RF conducted test					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Duedate (yyyy-mm-dd)
DC Power Supply	Agilent Technologies Inc	66311B	W009-09	2020/7/15	2021/7/15
Signal Analyzer	Rohde & Schwarz	FSV	W025-05	2020/1/3	2021/1/2
Coaxial Cable	SGS	N/A	SEM031-01	2020/6/12	2021/6/11
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2020/7/14	2021/7/14
Temperature Chamber	GIANT FORCE	ICT-150-40-CP-AR	W027-03	2019/10/27	2020/10/27
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2020/7/14	2021/7/14

RE in Chamber					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2018/3/13	2021/3/12
Measurement Software	AUDIX	e3V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2020/6/12	2021/6/11
EXA Signal Analyzer (10Hz-26.5GHz)	Agilent Technologies Inc	N9010A	SEM004-09	2020/3/12	2021/3/11
BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-01	2020/6/27	2023/6/26
Horn Antenna (0.8-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2018/4/13	2021/4/12
Pre-amplifier(0.1-1.3GHz)	HP	8447D	SEM005-02	2020/7/14	2021/7/14
Low Noise Amplifier(100MHz-18GHz)	Black Diamond Series	BDLNA-0118-352810	SEM005-05	2019/9/3	2020/9/2
Horn Antenna (15-40GHz)	Schwarzbeck	BBHA 9170	SEM003-15	2017/10/17	2020/10/16
Pre-amplifier(18-26GHz)	Rohde & Schwarz	CH14-H052	SEM005-17	2020/3/2	2021/3/1
Band filter	N/A	N/A	SEM023-01	N/A	N/A

RE in Chamber					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2020/8/5	2023/8/4
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM025-01	2020/6/12	2021/6/11
MXE EMI Receiver (20Hz-8.4GHz)	Agilent Technologies	N9038A	SEM004-05	2020/7/14	2021/7/14
BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEM003-01	2020/6/27	2023/6/26
Pre-amplifier (0.1-1.3GHz)	Agilent Technologies	8447D	SEM005-01	2020/3/2	2021/3/1

RE in Chamber					
Test Equipment	**Manufacturer**	**Model No.**	**Inventory No.**	**Cal. Date (yyyy-mm-dd)**	**Cal. Due date (yyyy-mm-dd)**
10m Semi-Anechoic Chamber	SAEMC	FSAC1018	SEM001-03	2018/3/31	2021/3/30
EMI Test Receiver (9k-7GHz)	Rohde & Schwarz	ESR	SEM004-03	2020/3/2	2021/3/1
Trilog-Broadband Antenna(25M-2GHz)	Schwarzbeck	VULB9168	SEM003-18	2020/3/15	2022/3/14
Pre-amplifier (9k-1GHz)	Sonoma	310N	SEM005-03	2020/3/12	2021/3/11
Loop Antenna (9kHz-30MHz)	ETS-Lindgren	6502	SEM003-08	2017/8/22	2020/8/21
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM029-01	2020/6/12	2021/6/11

7 Photographs - EUT Constructional Details

Refer to Appendix A - Photographs of Set-Up for ZR/2020/70006.

The End