



MEASUREMENT REPORT FCC Part 90

Applicant Name:
 LG Electronics USA, Inc.
 111 Sylvan Avenue, North Building
 Englewood Cliffs, NJ 07632
 United States


Date of Testing:
 07/30/2020 - 09/03/2020
Test Site/Location:
 PCTEST Lab. Columbia, MD, USA
Test Report Serial No.:
 1M2007130107-04.ZNF

FCC ID:	ZNFK920AM
APPLICANT:	LG Electronics USA, Inc.

Application Type: Certification
Model: LM-K920AM
Additional Model(s): LM-K920TM, LM-K920QM, LMK920AM, LMK920TM, LMK920QM, K920AM, K920TM, K920QM
EUT Type: Portable Handset
FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part: §2.1049, §22(H), §90(S), §90(R)
Test Procedure(s): ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


 Randy Ortanez
 President




FCC ID: ZNFK920AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset	Page 1 of 59	

TABLE OF CONTENTS


1.0	INTRODUCTION	4
1.1	Scope	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Test Configuration	5
2.4	EMI Suppression Device(s)/Modifications	5
3.0	DESCRIPTION OF TESTS	6
3.1	Evaluation Procedure	6
3.2	Radiated Power and Radiated Spurious Emissions	6
4.0	MEASUREMENT UNCERTAINTY	7
5.0	TEST EQUIPMENT CALIBRATION DATA	8
6.0	SAMPLE CALCULATIONS	9
7.0	TEST RESULTS	10
7.1	Summary	10
7.2	Occupied Bandwidth	12
7.3	Spurious and Harmonic Emissions at Antenna Terminal	25
7.4	Band Edge Emissions at Antenna Terminal	33
7.5	Conducted Power Output Data	43
7.6	Radiated Power (ERP)	45
7.7	Radiated Spurious Emissions Measurements	47
7.8	Frequency Stability / Temperature Variation	52
8.0	CONCLUSION.....	59

FCC ID: ZNFK920AM	 PCTEST <small>Proud to be part of  element</small>	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 2 of 59



MEASUREMENT REPORT

FCC Part 90



Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	Measurement	Max. Power [W]	Max. Power [dBm]	Emission Designator
LTE Band 26	15 MHz	QPSK	821.5	ERP	0.050	16.98	14M4G7D
		16QAM	821.5	ERP	0.043	16.30	14M5W7D
		64QAM	821.5	ERP	0.037	15.71	14M6W7D
	15 MHz	QPSK	821.5	Conducted	0.289	24.61	14M4G7D
		16QAM	821.5	Conducted	0.227	23.56	14M5W7D
		64QAM	821.5	Conducted	0.183	22.63	14M6W7D
	10 MHz	QPSK	819.0	Conducted	0.298	24.74	9M85G7D
		16QAM	819.0	Conducted	0.242	23.84	9M71W7D
		64QAM	819.0	Conducted	0.235	23.71	9M85W7D
	5 MHz	QPSK	816.5 - 821.5	Conducted	0.313	24.95	4M93G7D
		16QAM	816.5 - 821.5	Conducted	0.254	24.04	4M95W7D
		64QAM	816.5 - 821.5	Conducted	0.248	23.95	4M95W7D
	3 MHz	QPSK	815.5 - 822.5	Conducted	0.311	24.93	2M96G7D
		16QAM	815.5 - 822.5	Conducted	0.249	23.97	2M98W7D
		64QAM	815.5 - 822.5	Conducted	0.199	22.98	2M95W7D
	1.4 MHz	QPSK	814.7 - 823.3	Conducted	0.262	24.19	1M21G7D
		16QAM	814.7 - 823.3	Conducted	0.249	23.97	1M19W7D
		64QAM	814.7 - 823.3	Conducted	0.198	22.97	1M21W7D
LTE Band 14	10 MHz	QPSK	793.0	ERP	0.056	17.48	9M77G7D
		16QAM	793.0	ERP	0.042	16.27	9M69W7D
		64QAM	793.0	ERP	0.029	14.64	9M74W7D
	5 MHz	QPSK	790.5 - 795.5	ERP	0.053	17.26	4M88G7D
		16QAM	790.5 - 795.5	ERP	0.047	16.70	4M84W7D
		64QAM	790.5 - 795.5	ERP	0.042	16.26	4M83W7D
CDMA BC10	N/A	CDMA	817.9 - 823.1	Conducted	0.342	25.34	1M28F9W

EUT Overview

FCC ID: ZNFK920AM	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 3 of 59

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: ZNFK920AM	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 4 of 59

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **LG Portable Handset FCC ID: ZNFK920AM**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part.

Test Device Serial No.: 08519, 08675

2.2 Device Capabilities

This device contains the following capabilities:

800/850/1900 CDMA/EvDO Rev0/A, 1x Advanced (BC0, BC1, BC10), 850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, Multi-Band 5G NR, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE), NFC

2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: ZNFK920AM	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 LG	Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset	Page 5 of 59	

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

3.2 Radiated Power and Radiated Spurious Emissions

§2.1053

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer “Channel Power” function with the integration band set to the emissions’ occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168 D01 v03r01.

Per the guidance of ANSI/TIA-603-E-2016, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

For fundamental radiated power measurements, the guidance of KDB 971168 D01 v03r01 is used to record the EUT power level that is subsequently matched via the aforementioned substitution method given in ANSI/TIA-603-E-2016.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

FCC ID: ZNFK920AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset	Page 6 of 59	

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: ZNFK920AM	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 7 of 59

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTX2	Licensed Transmitter Cable Set	4/9/2020	Annual	4/9/2021	LTX2
Agilent	8648D	(9kHz-4GHz) Signal Generator	6/23/2020	Annual	6/23/2021	3613A00315
Anritsu	MT8821C	Radio Communication Analyzer	3/10/2020	Annual	3/10/2021	6200901190
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	10/10/2019	Biennial	10/10/2021	121034
Emco	3115	Horn Antenna (1-18GHz)	6/18/2020	Biennial	6/18/2022	9704-5182
Espec	ESX-2CA	Environmental Chamber	8/13/2019	Annual	8/13/2020	17620
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	3/12/2020	Biennial	3/12/2022	128337
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	2/22/2019	Biennial	2/22/2021	128338
ETS-Lindgren	3115	Double Ridged Guide Horn 750MHz - 18GHz	3/12/2020	Biennial	3/12/2022	150693
Mini Circuits	TVA-11-422	RF Power Amp	N/A			QA1317001
Rohde & Schwarz	CMU200	Base Station Simulator	N/A			107826
Rohde & Schwarz	CMU200	Base Station Simulator	N/A			836536/0005
Rohde & Schwarz	CMW500	Radio Communication Tester	8/26/2019	Annual	8/26/2020	100976
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	11/1/2019	Annual	11/1/2020	100040
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	7/15/2020	Annual	7/15/2021	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	9/23/2019	Annual	9/23/2020	100348
Rohde & Schwarz	TC-TA18	Cross-Pol Antenna 400MHz-18GHz	7/8/2020	Biennial	7/8/2022	101058
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	2/10/2020	Annual	2/10/2021	102134
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	2/21/2020	Annual	2/21/2021	102133
Sunol	DRH-118	Horn Antenna (1-18GHz)	10/3/2019	Biennial	10/3/2021	A050307
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	7/27/2020	Biennial	7/27/2022	A051107
Sunol	DRH-118	Horn Antenna (1-18 GHz)	8/27/2019	Biennial	8/27/2021	A042511

Table 5-1. Test Equipment

Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: ZNFK920AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset	Page 8 of 59	

6.0 SAMPLE CALCULATIONS

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

- LTE BW = 8.62 MHz
- G = Phase Modulation
- 7 = Quantized/Digital Info
- D = Data transmission, telemetry, telecommand

16QAM Modulation

Emission Designator = 8M45W7D

- LTE BW = 8.45 MHz
- W = Amplitude/Angle Modulated
- 7 = Quantized/Digital Info
- D = Data transmission, telemetry, telecommand

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm $- (-24.80)$.

FCC ID: ZNFK920AM	 <small>Proud to be part of </small>	MEASUREMENT REPORT (CERTIFICATION)	
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset	Approved by: Quality Manager Page 9 of 59

7.0 TEST RESULTS

7.1 Summary

Company Name: LG Electronics USA, Inc.
 FCC ID: ZNFK920AM
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): CDMA / EvDO / LTE
 Band: Band Class 10 / Band 26 / Band 14

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
2.1051 90.691(a) 90.543(a)	Conducted Band Edge / Spurious Emissions	On all frequencies between 769-775 MHz and 799-805 MHz, attenuation by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations. On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, attenuation by at least $43 + 10 \log(P)$ dB.(Band 14) > $43 + 10 \log_{10}(P[\text{Watts}])$ for all out-of-band emissions except > $50 + 10 \log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge (Band 26)		PASS	Sections 7.3, 7.4
2.1055 90.213	Frequency Stability	< 2.5 ppm		PASS	Section 7.8
2.1046 90.635	Conducted Power	< 100 Watts		PASS	Section 7.5
22.913(a.2)	Effective Radiated Power (Band 26)	< 7 Watts max. ERP		PASS	Section 7.6
90.542(a)(7)	Effective Radiated Power (Band 14)	< 3 Watts max. ERP	RADIATED	PASS	Section 7.6
2.1053 90.691(a) 90.543(e)	Radiated Spurious Emissions	> $43 + 10 \log_{10}(P[\text{Watts}])$ for all out-of-band emissions except > $50 + 10 \log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge		PASS	Section 7.7

Table 7-1. Summary of Test Results

Notes:

- All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.

FCC ID: ZNFK920AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset	Page 10 of 59	

- 2) The analyzer plots shown in Section 7.0 were taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST “2G/3G Automation,” Version 4.2.

FCC ID: ZNFK920AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 11 of 59

7.2 Occupied Bandwidth

§2.1049

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

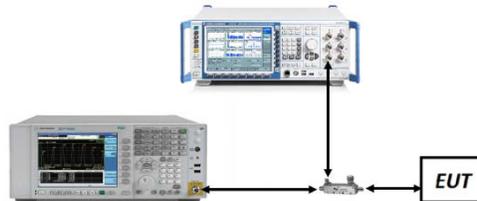



Figure 7-1. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: ZNFK920AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 12 of 59

CDMA BC10

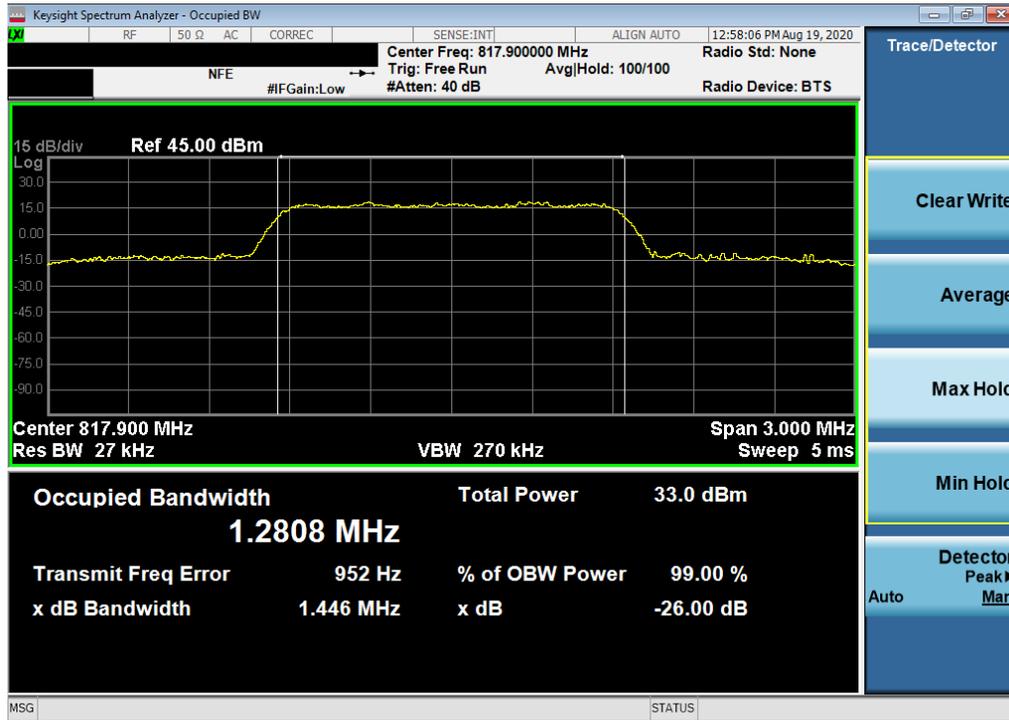


Plot 7-1. Occupied Bandwidth Plot (CDMA/EvDO, Ch. 476)

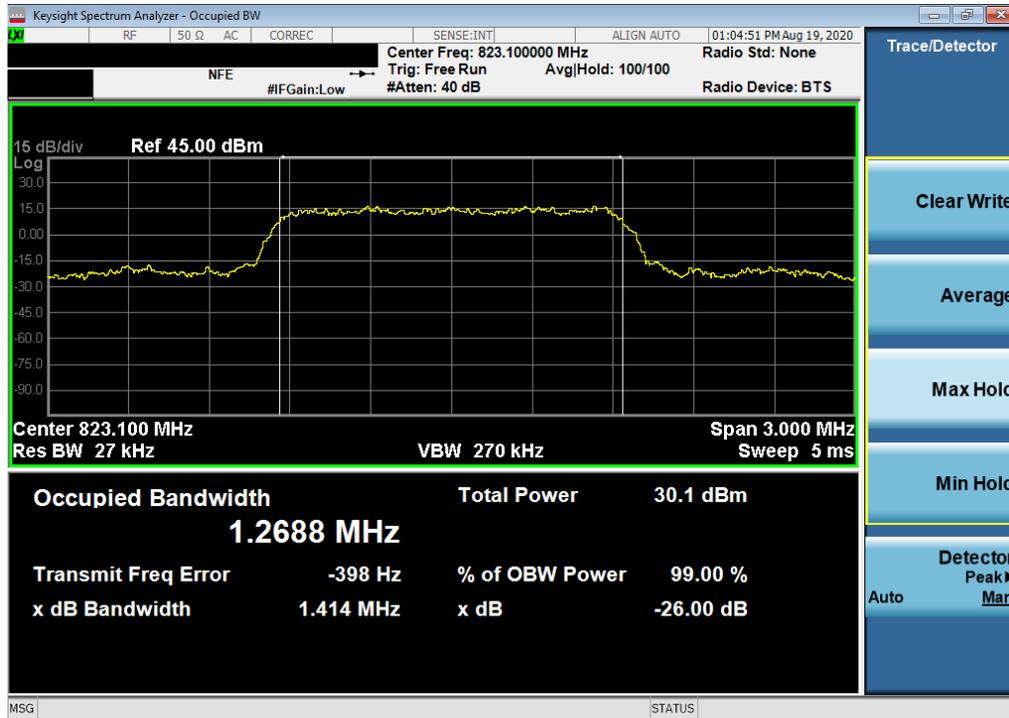


Plot 7-2. Occupied Bandwidth Plot (CDMA/EvDO, Ch. 684)

FCC ID: ZNFK920AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 13 of 59

LTE Band 26

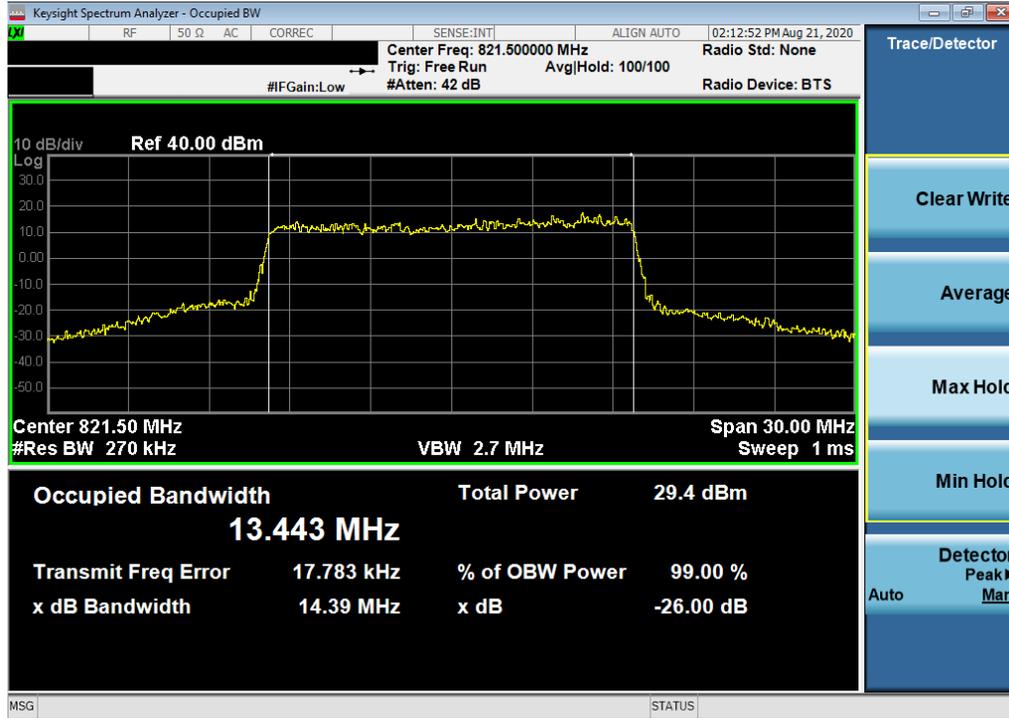


Plot 7-3. Occupied Bandwidth Plot (LTE Band 26 - 15MHz QPSK - Full RB Configuration)

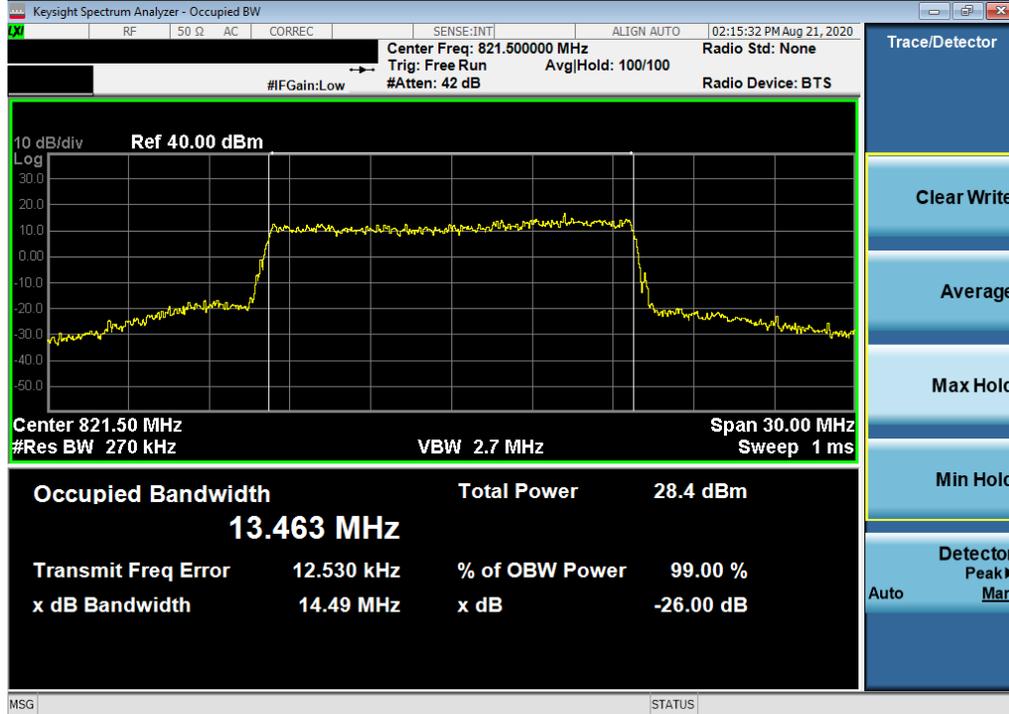


Plot 7-4. Occupied Bandwidth Plot (LTE Band 26 - 15MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFK920AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 14 of 59

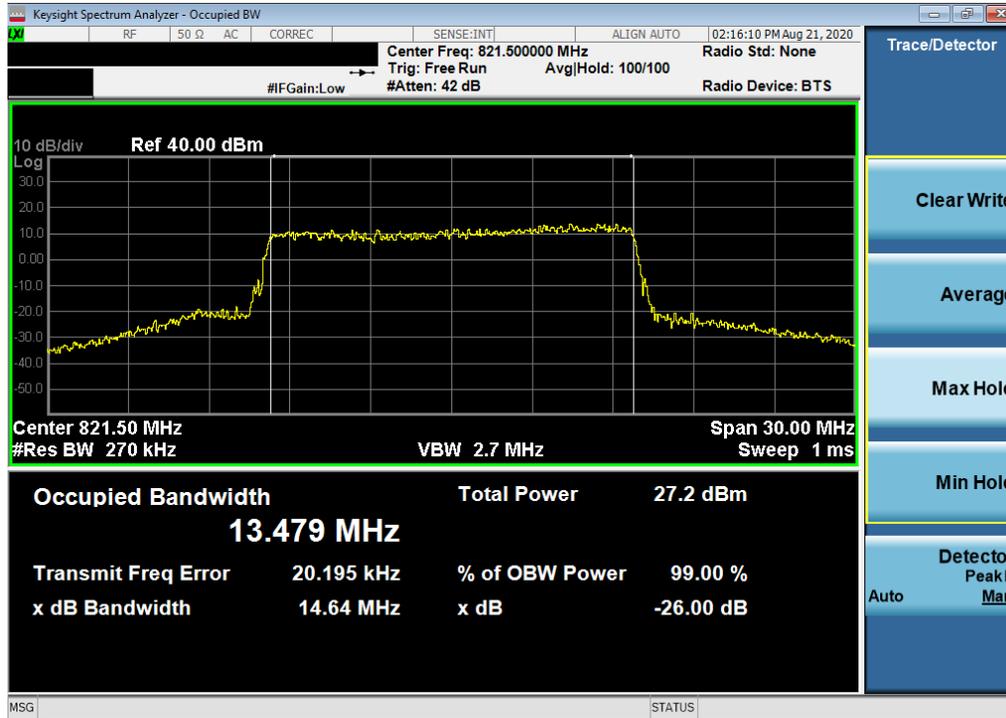


Plot 7-5. Occupied Bandwidth Plot (LTE Band 26 - 15MHz 64-QAM - Full RB Configuration)

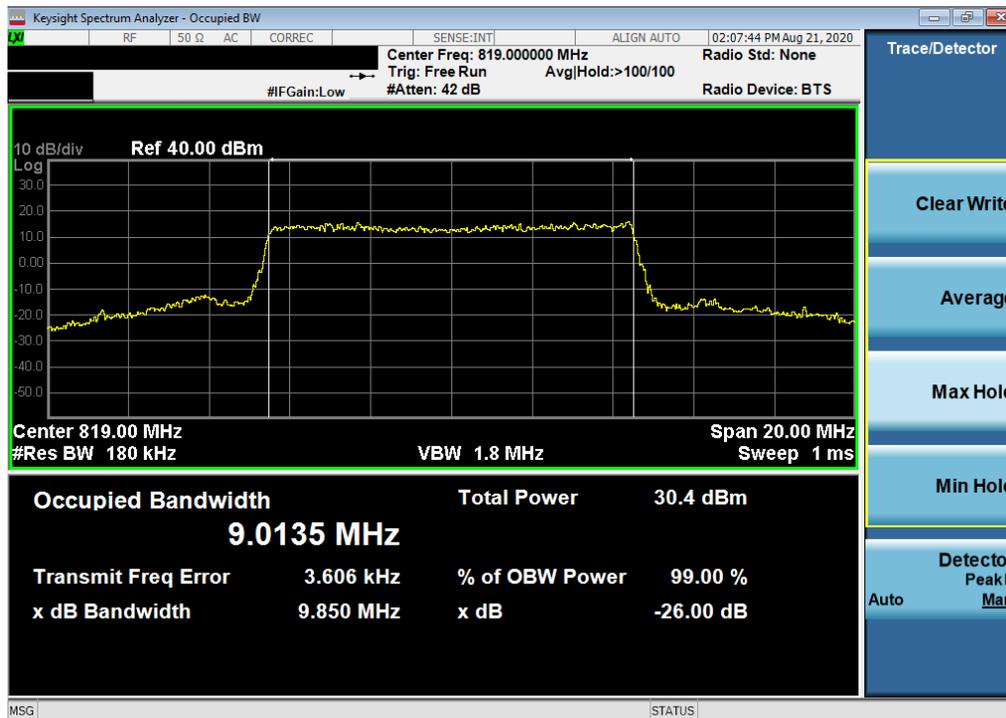


Plot 7-6. Occupied Bandwidth Plot (LTE Band 26 - 10MHz QPSK - Full RB Configuration)

FCC ID: ZNFK920AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 15 of 59

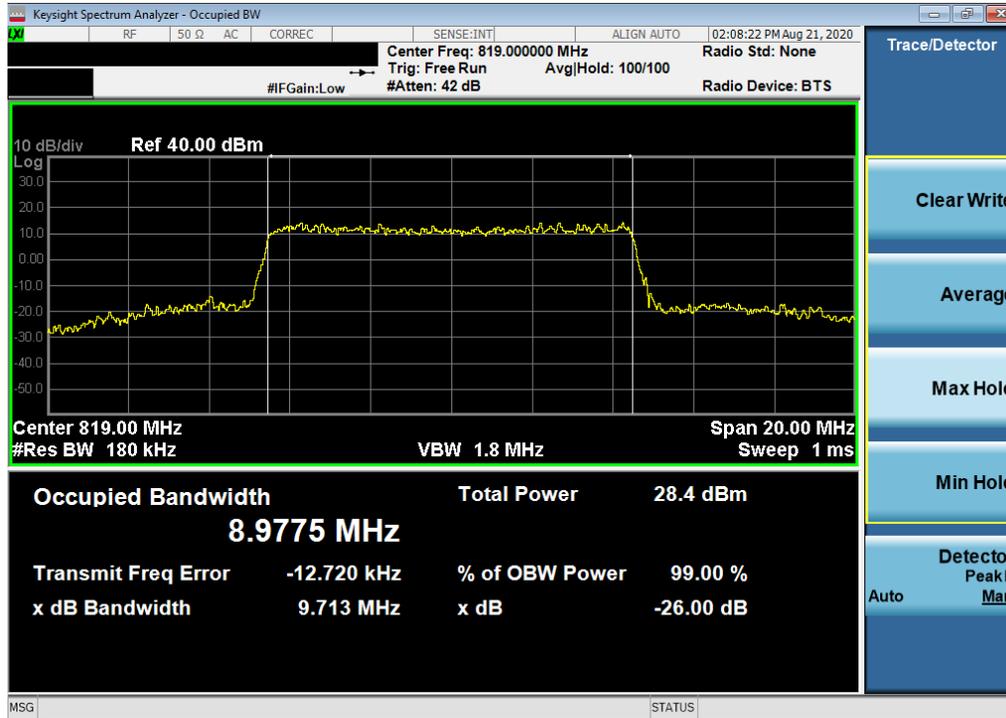


Plot 7-7. Occupied Bandwidth Plot (LTE Band 26 - 10MHz 16-QAM - Full RB Configuration)

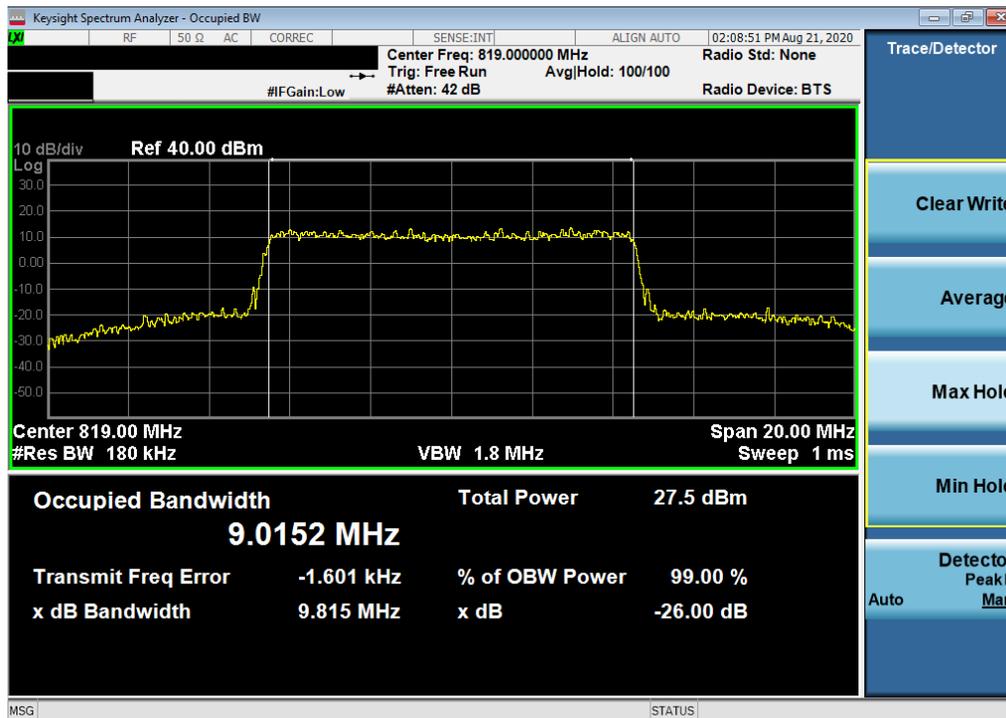


Plot 7-8. Occupied Bandwidth Plot (LTE Band 26 - 10MHz 64-QAM - Full RB Configuration)

FCC ID: ZNFK920AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 16 of 59

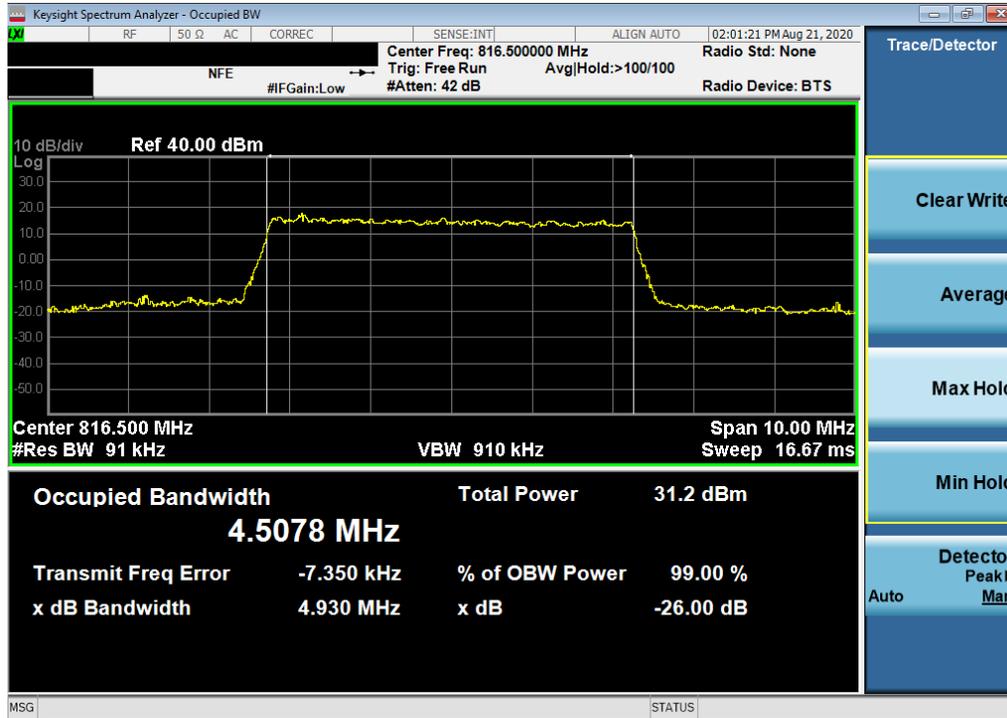


Plot 7-9. Occupied Bandwidth Plot (LTE Band 26 - 5MHz QPSK - Full RB Configuration)

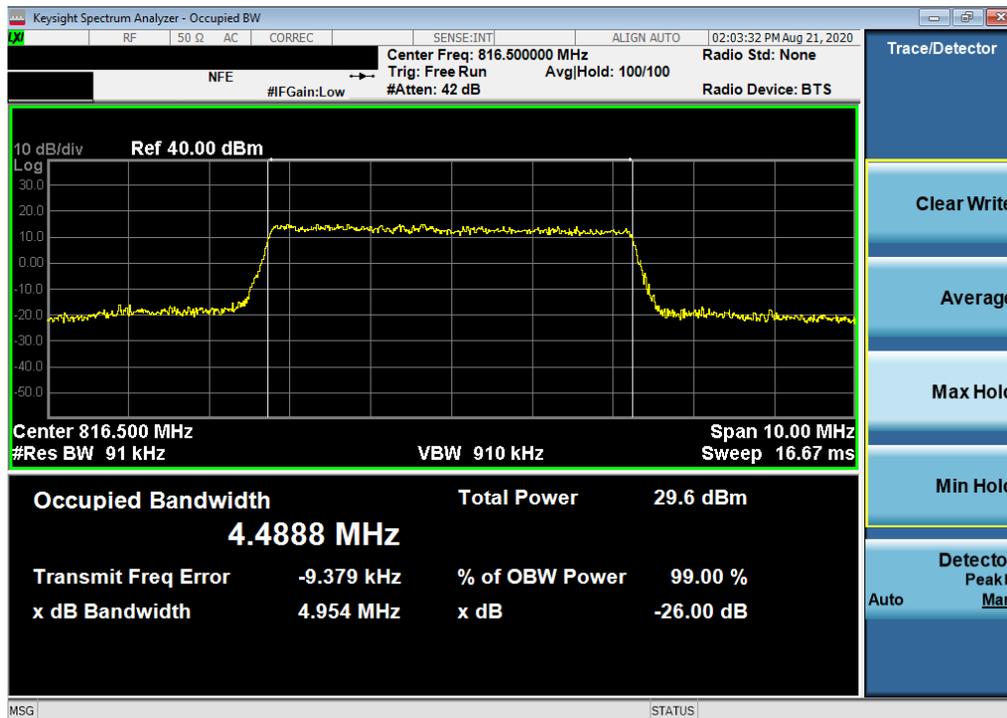


Plot 7-10. Occupied Bandwidth Plot (LTE Band 26 - 5MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFK920AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 17 of 59

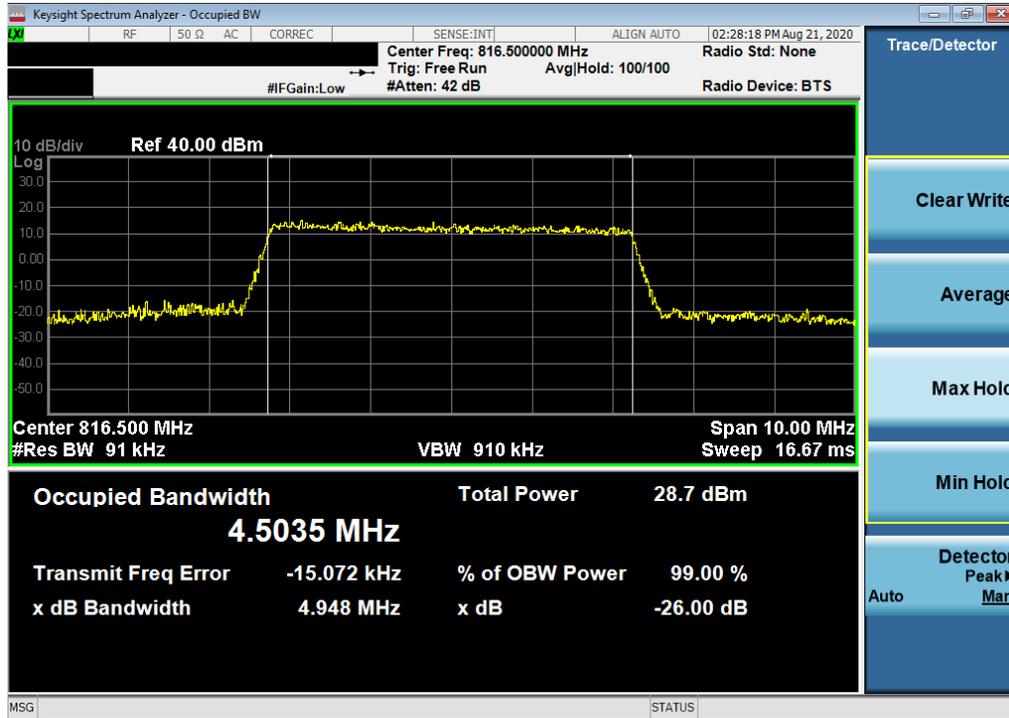


Plot 7-11. Occupied Bandwidth Plot (LTE Band 26 - 5MHz 64-QAM - Full RB Configuration)

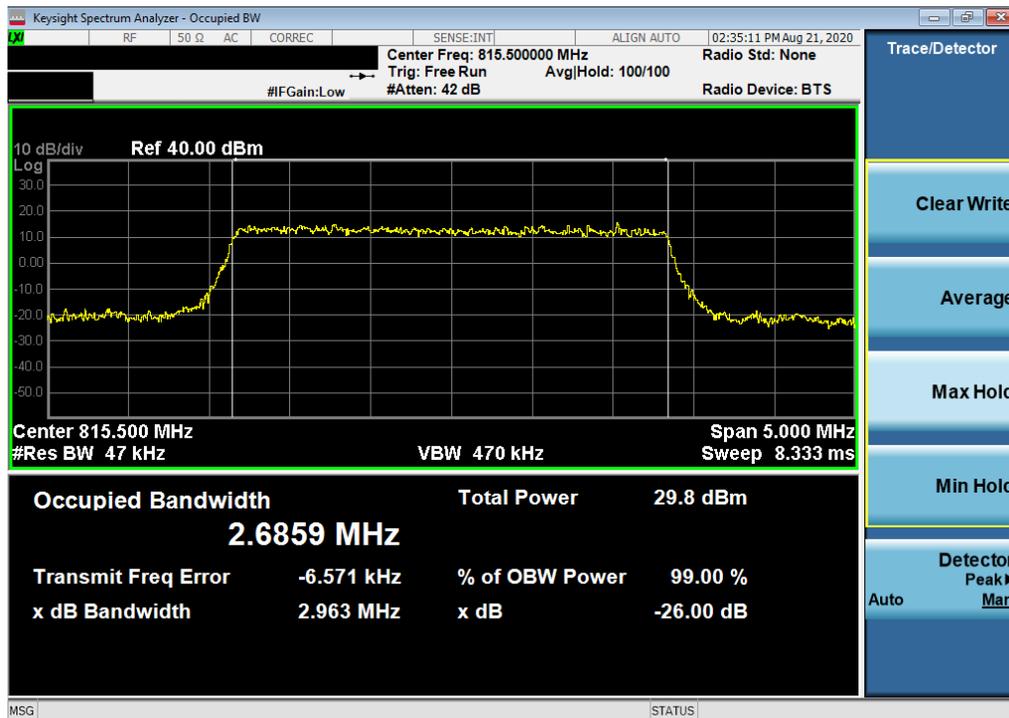


Plot 7-12. Occupied Bandwidth Plot (LTE Band 26 - 3MHz QPSK - Full RB Configuration)

FCC ID: ZNFK920AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 18 of 59

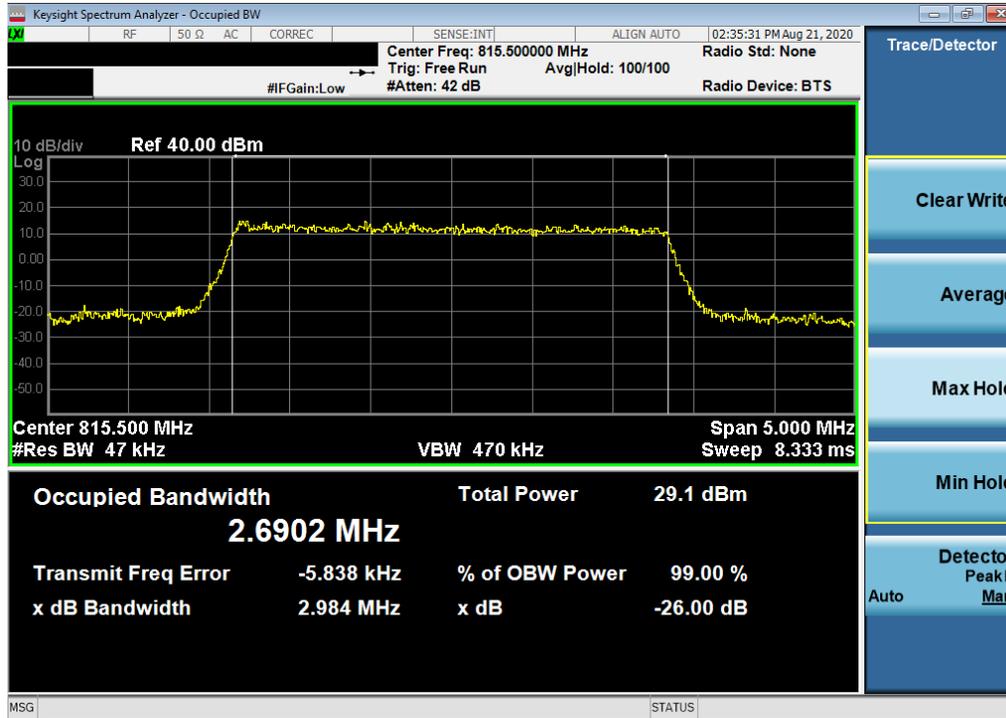


Plot 7-13. Occupied Bandwidth Plot (LTE Band 26 - 3MHz 16-QAM - Full RB Configuration)

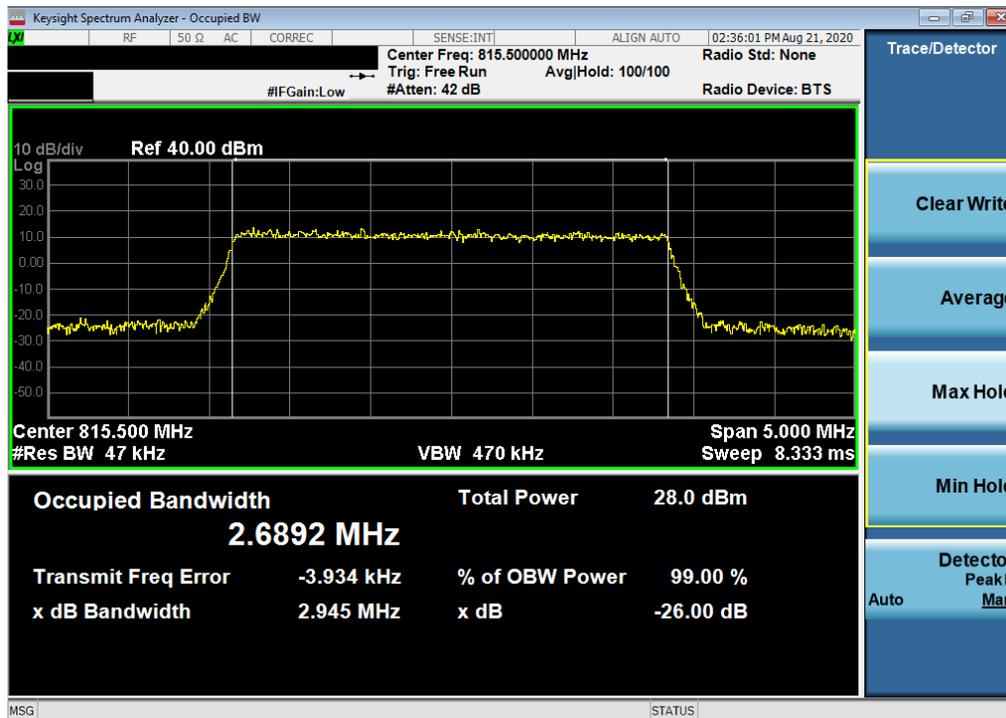


Plot 7-14. Occupied Bandwidth Plot (LTE Band 26 - 3MHz 64-QAM - Full RB Configuration)

FCC ID: ZNFK920AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 19 of 59

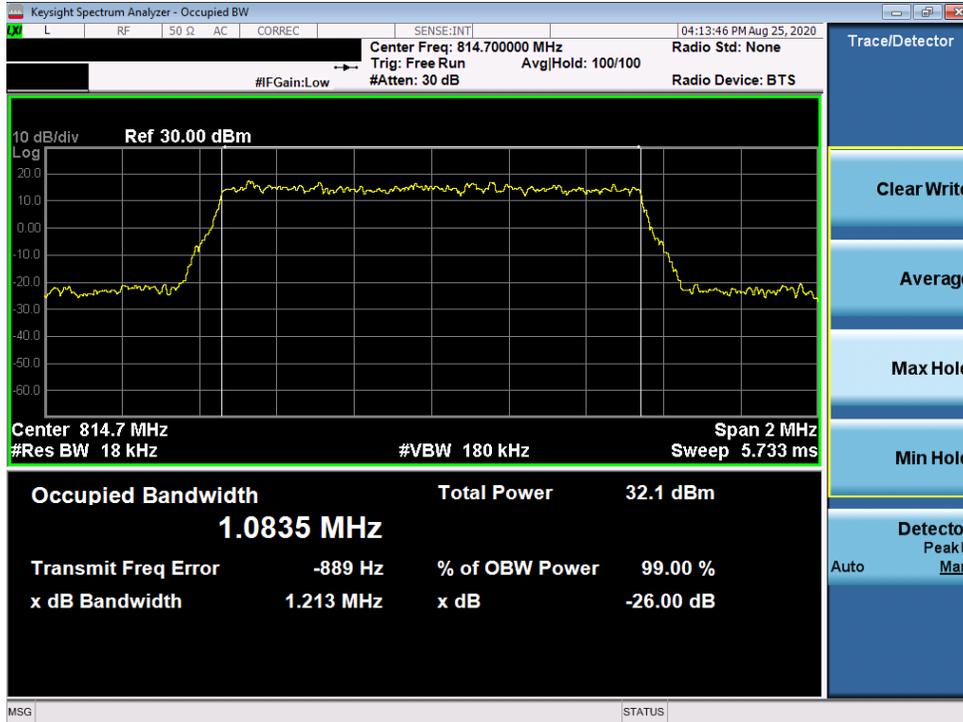


Plot 7-15. Occupied Bandwidth Plot (LTE Band 26 - 1.4MHz QPSK - Full RB Configuration)

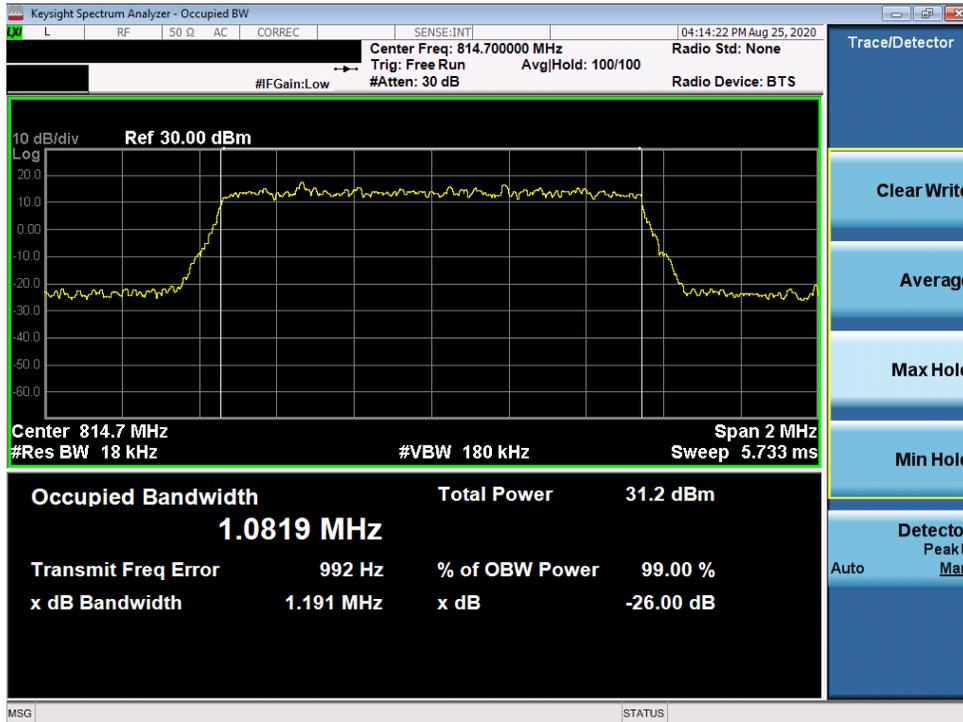

Plot 7-16. Occupied Bandwidth Plot (LTE Band 26 - 1.4MHz 16-QAM - Full RB Configuration)


FCC ID: ZNFK920AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 20 of 59

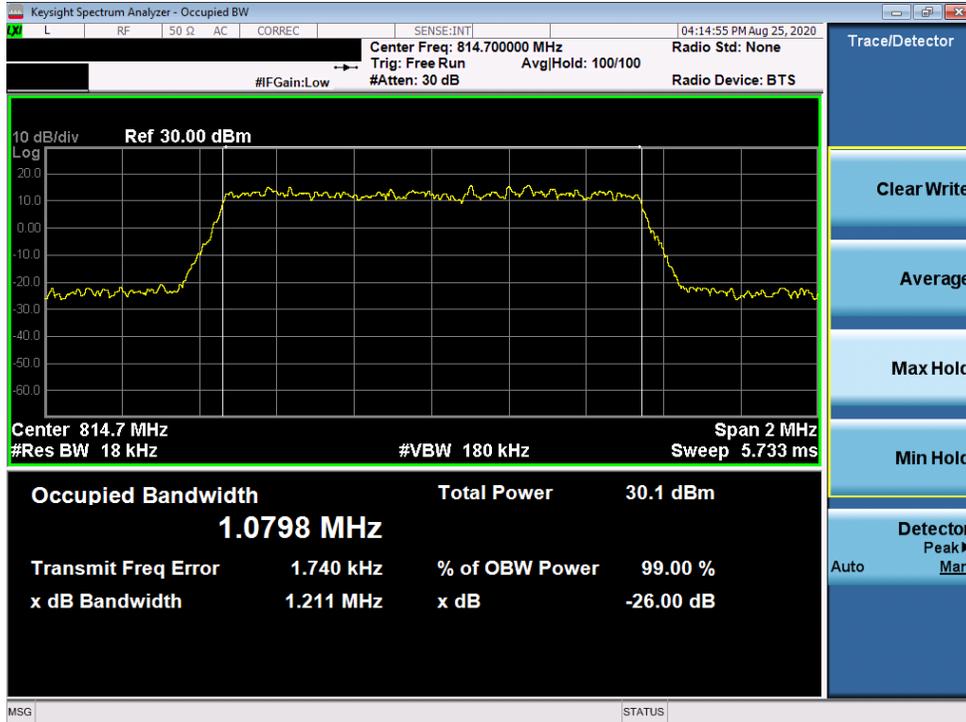


Plot 7-17. Occupied Bandwidth Plot (LTE Band 26 - 1.4MHz 64-QAM - Full RB Configuration)

FCC ID: ZNFK920AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 21 of 59

LTE Band 14

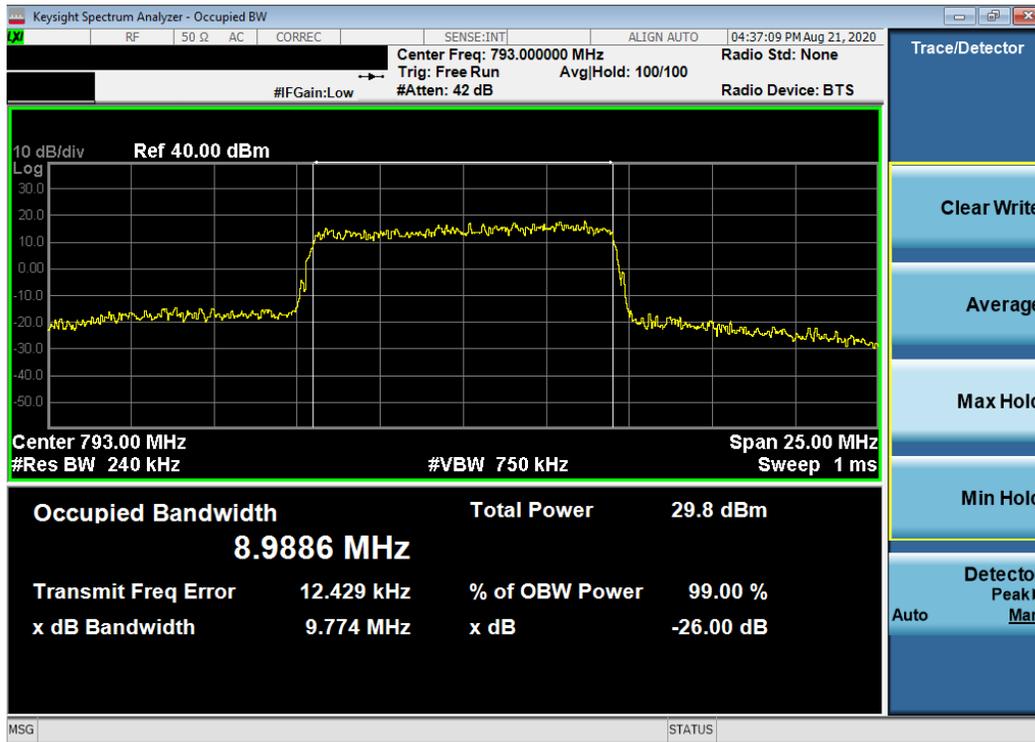


Plot 7-18. Occupied Bandwidth Plot (LTE Band 14 - 10MHz QPSK - Full RB Configuration)

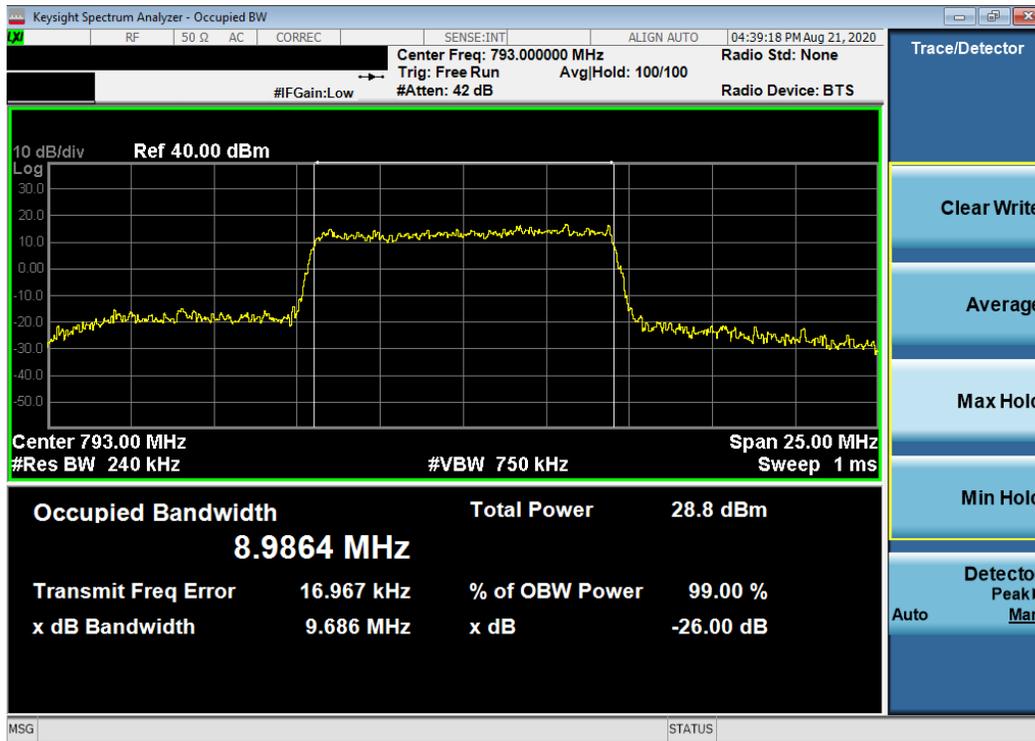

Plot 7-19. Occupied Bandwidth Plot (LTE Band 14 - 10MHz 16-QAM - Full RB Configuration)

FCC ID: ZNFK920AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 22 of 59

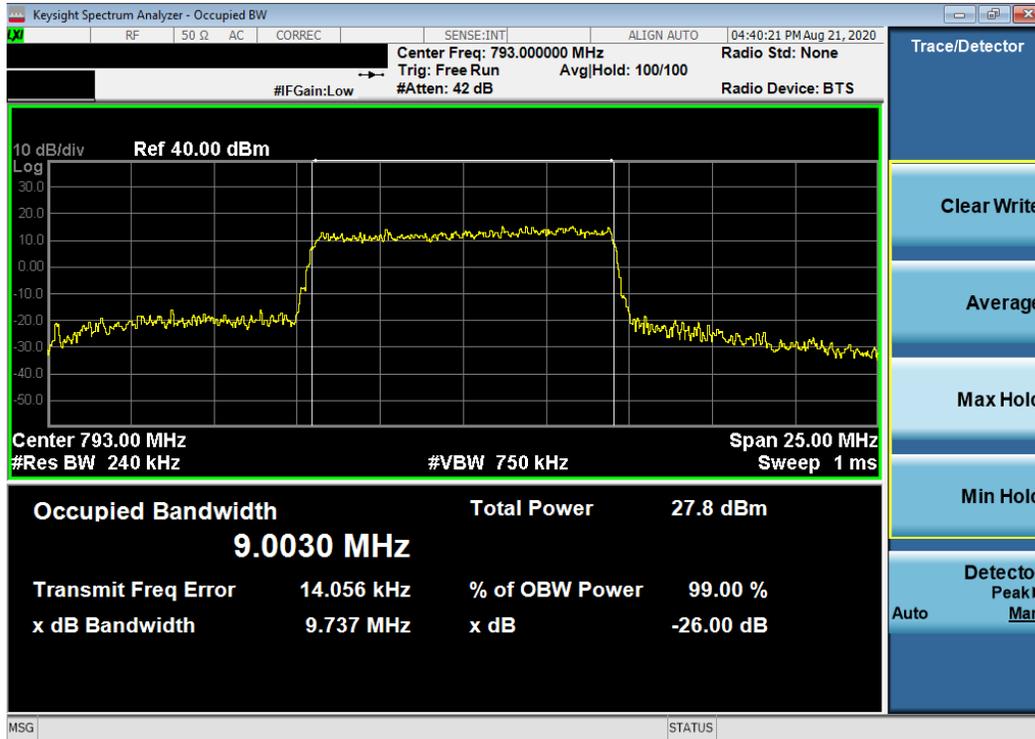

Plot 7-20. Occupied Bandwidth Plot (LTE Band 14 - 10MHz 64-QAM - Full RB Configuration)




Plot 7-21. Occupied Bandwidth Plot (LTE Band 14 - 5MHz QPSK - Full RB Configuration)

FCC ID: ZNFK920AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 23 of 59



Plot 7-22. Occupied Bandwidth Plot (LTE Band 14 - 5MHz 16-QAM - Full RB Configuration)

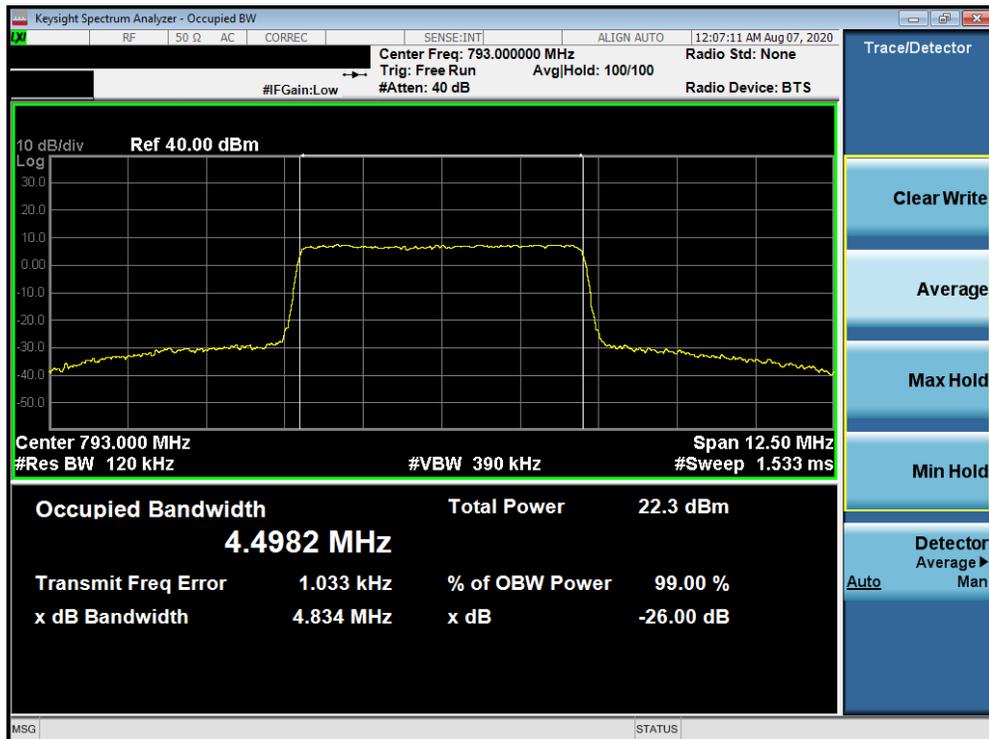

Plot 7-23. Occupied Bandwidth Plot (LTE Band 14 - 5MHz 64-QAM - Full RB Configuration)

FCC ID: ZNFK920AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 24 of 59

7.3 Spurious and Harmonic Emissions at Antenna Terminal §2.1051

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + 10 \log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz (separated into at least two plots per channel)
2. RBW \geq 100kHz
3. VBW \geq 3 x RBW
4. Detector = RMS
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


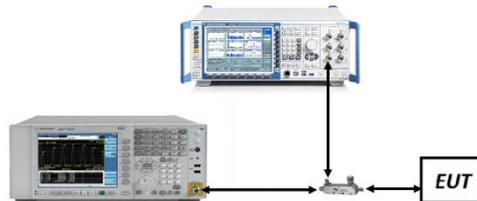



Figure 7-2. Test Instrument & Measurement Setup

FCC ID: ZNFK920AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 25 of 59

CDMA BC10

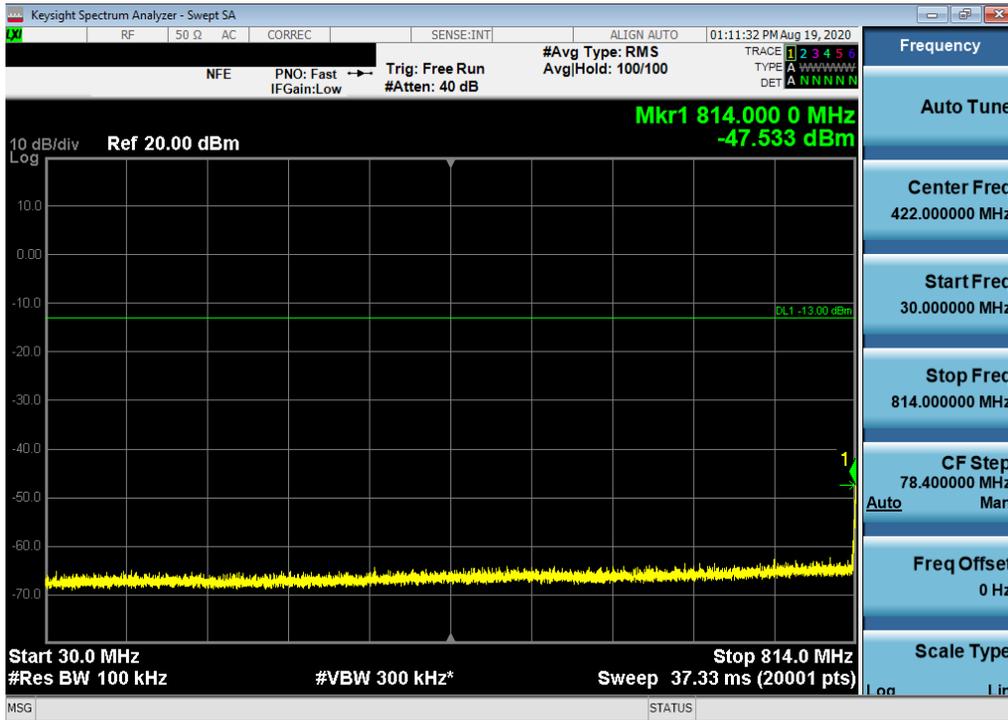


Plot 7-24. Conducted Spurious Plot (CDMA/EvDO, Ch. 476)

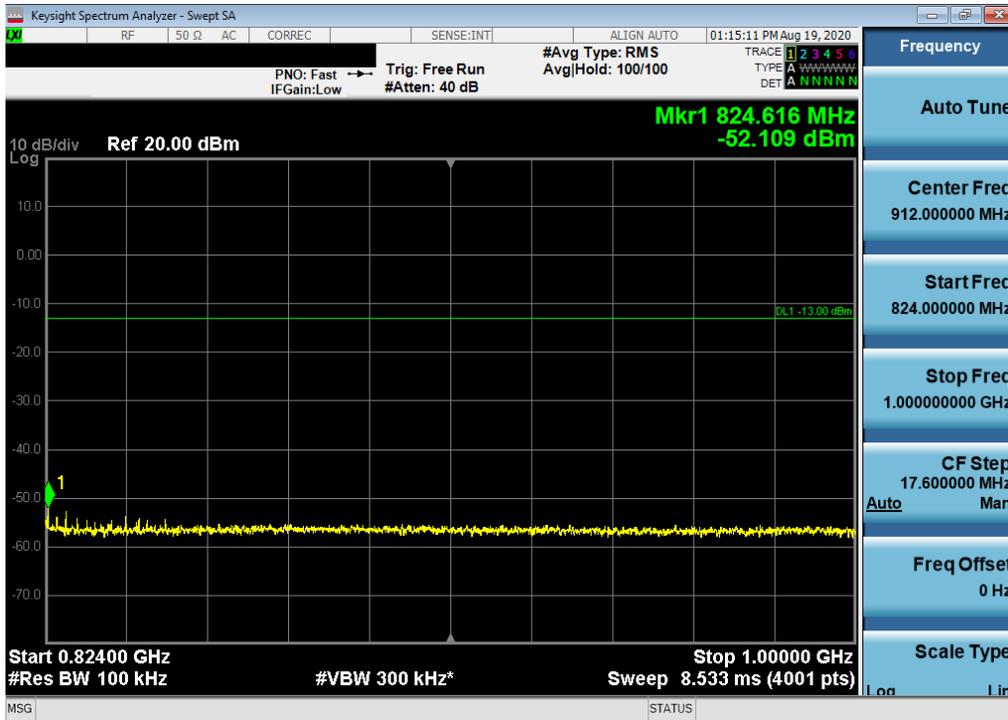


Plot 7-25. Conducted Spurious Plot (CDMA/EvDO, Ch. 476)

FCC ID: ZNFK920AM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 26 of 59

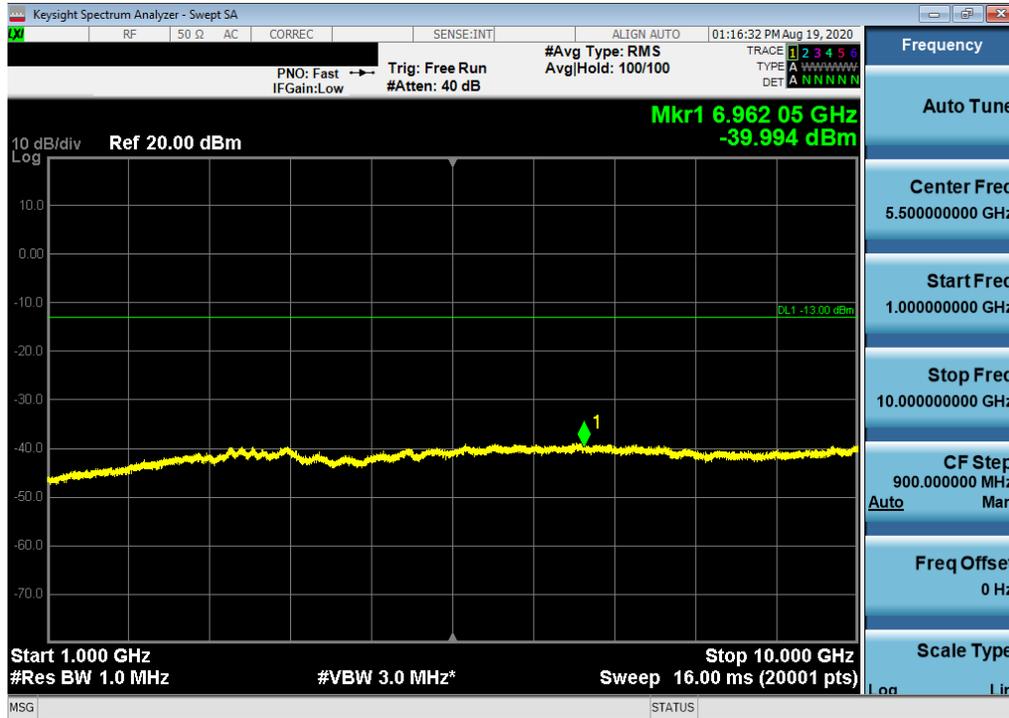


Plot 7-26. Conducted Spurious Plot (CDMA/EvDO, Ch. 476)

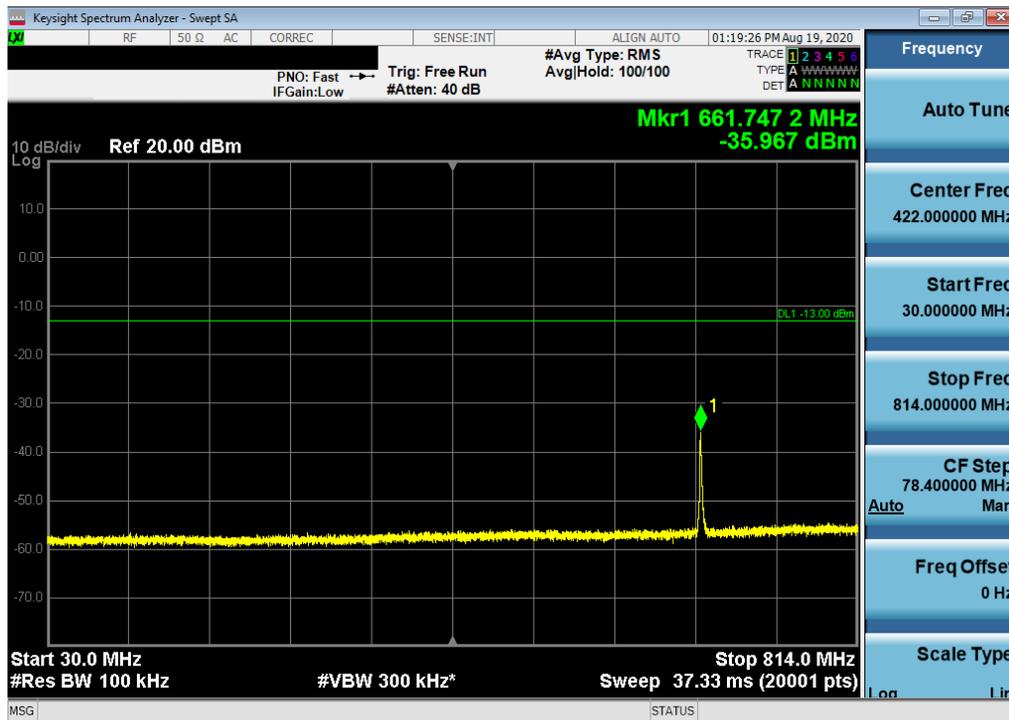


Plot 7-27. Conducted Spurious Plot (CDMA/EvDO, Ch. 684)

FCC ID: ZNFK920AM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 27 of 59

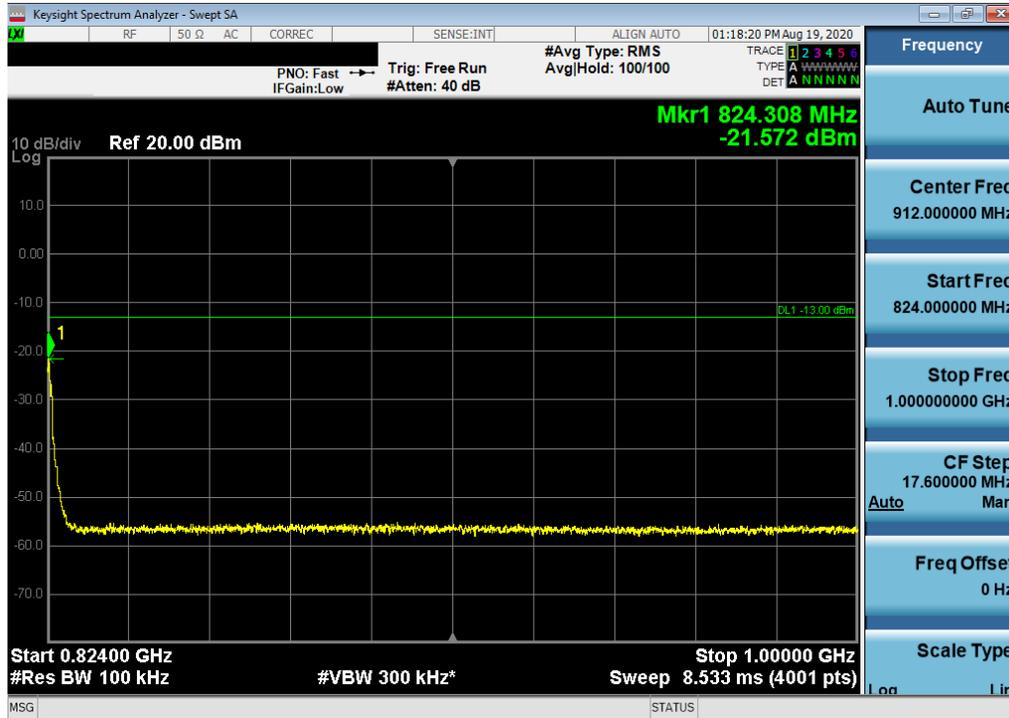


Plot 7-28. Conducted Spurious Plot (CDMA/EvDO, Ch. 684)

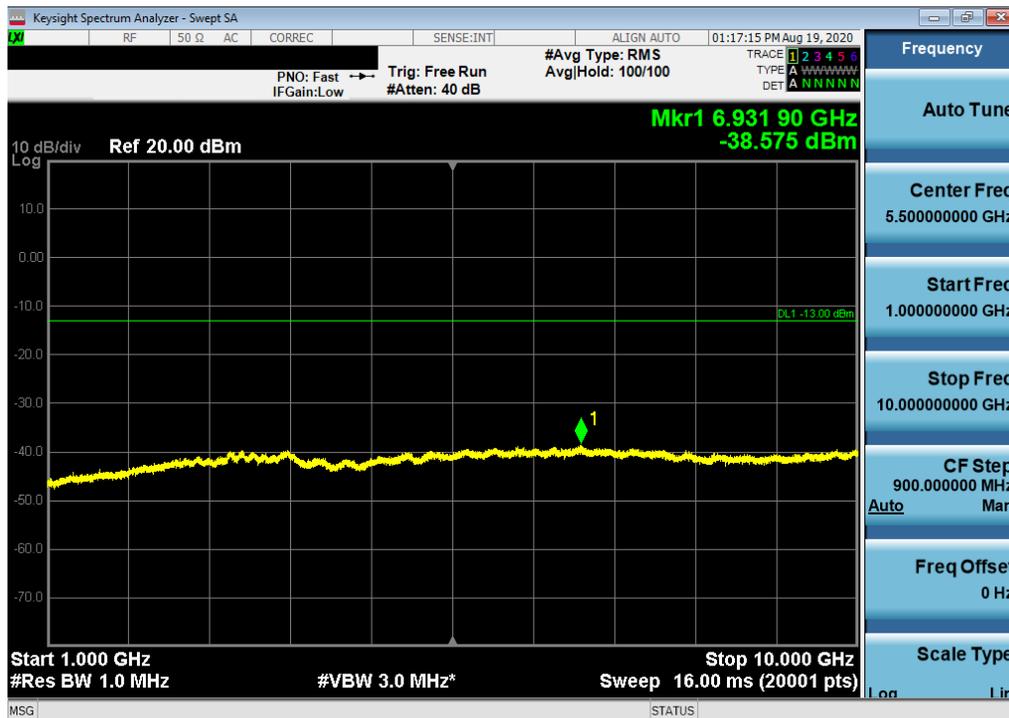


Plot 7-29. Conducted Spurious Plot (CDMA/EvDO, Ch. 684)

FCC ID: ZNFK920AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 28 of 59

LTE Band 26

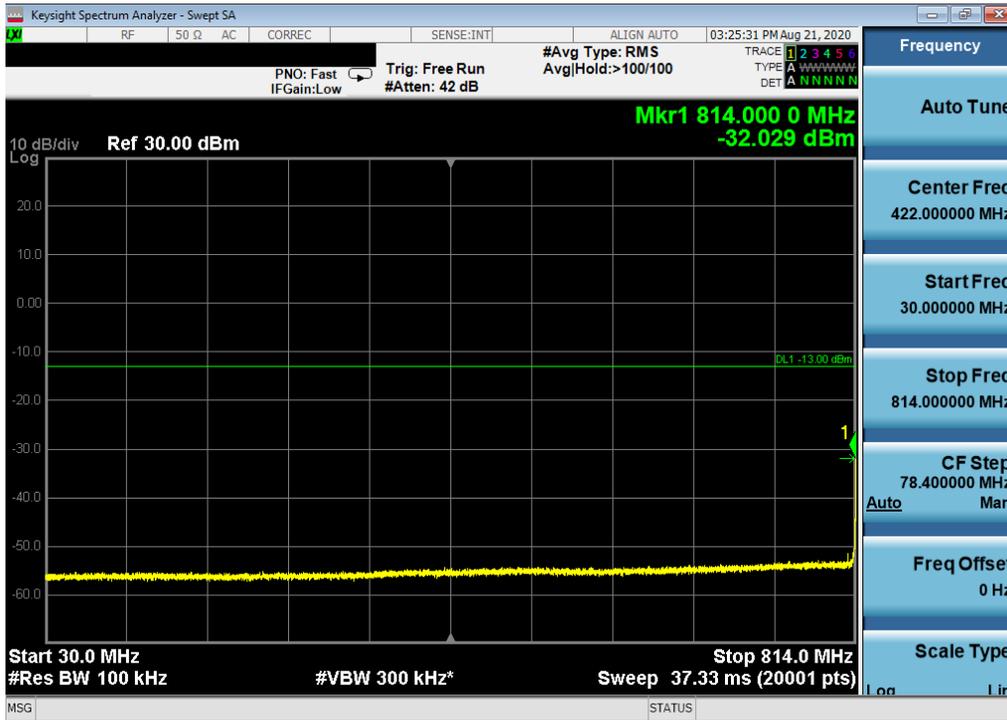


Plot 7-30. Conducted Spurious Plot (LTE Band 26 - 15MHz QPSK - RB Size 1, RB Offset 0)

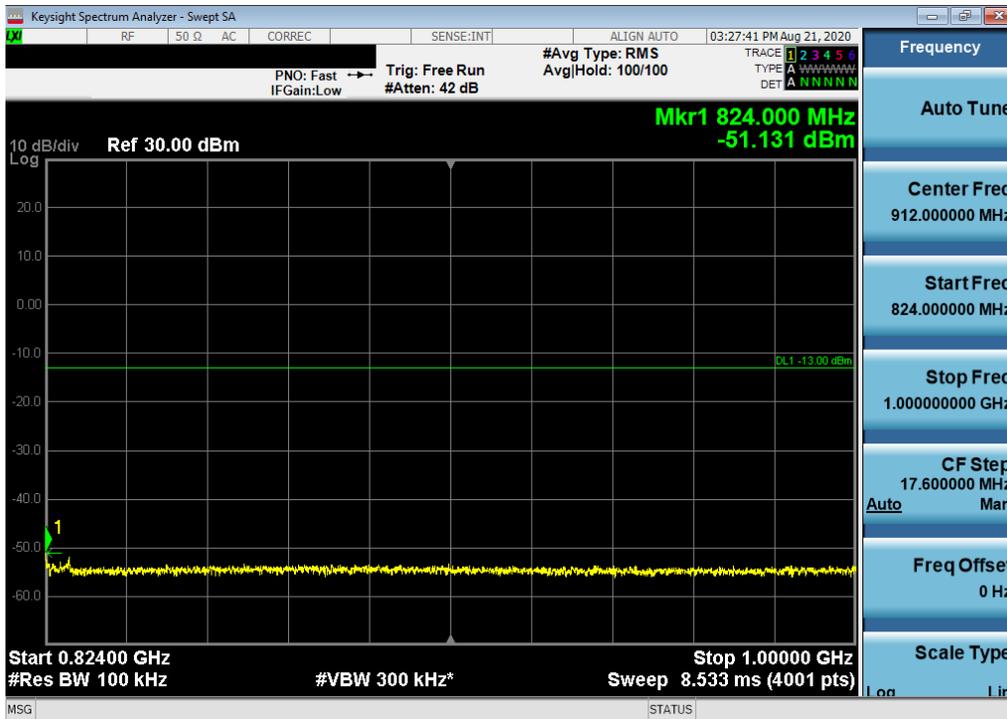

Plot 7-31. Conducted Spurious Plot (LTE Band 26 - 15MHz QPSK - RB Size 1, RB Offset 0)


FCC ID: ZNFK920AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 29 of 59

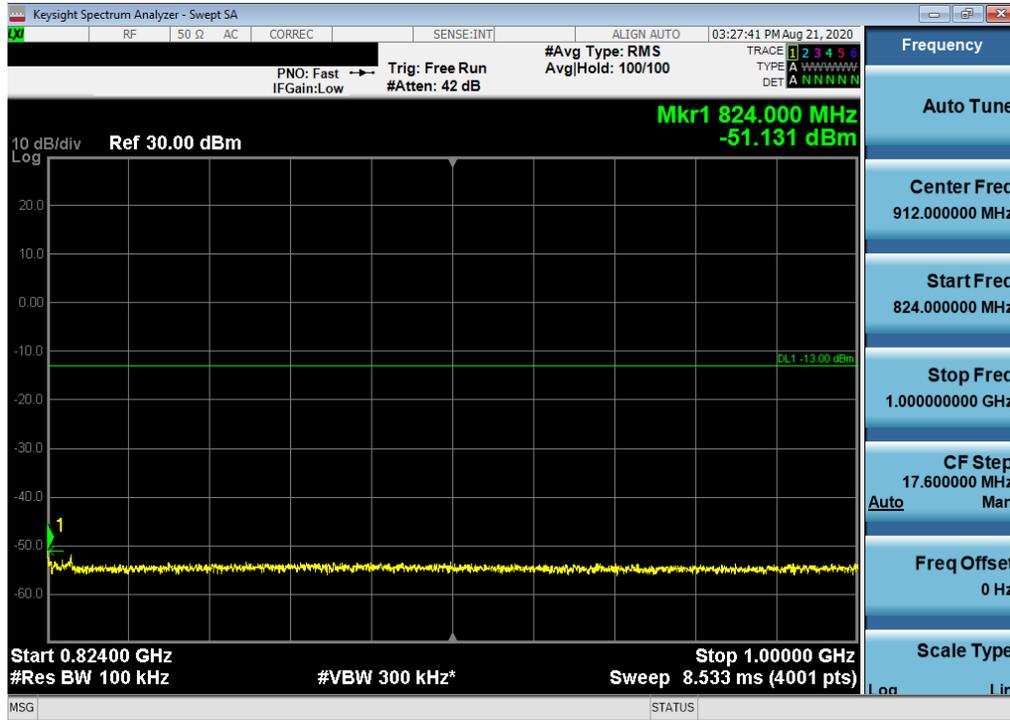


Plot 7-32. Conducted Spurious Plot (LTE Band 26 - 15MHz QPSK - RB Size 1, RB Offset 0)

FCC ID: ZNFK920AM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 30 of 59

LTE Band 14

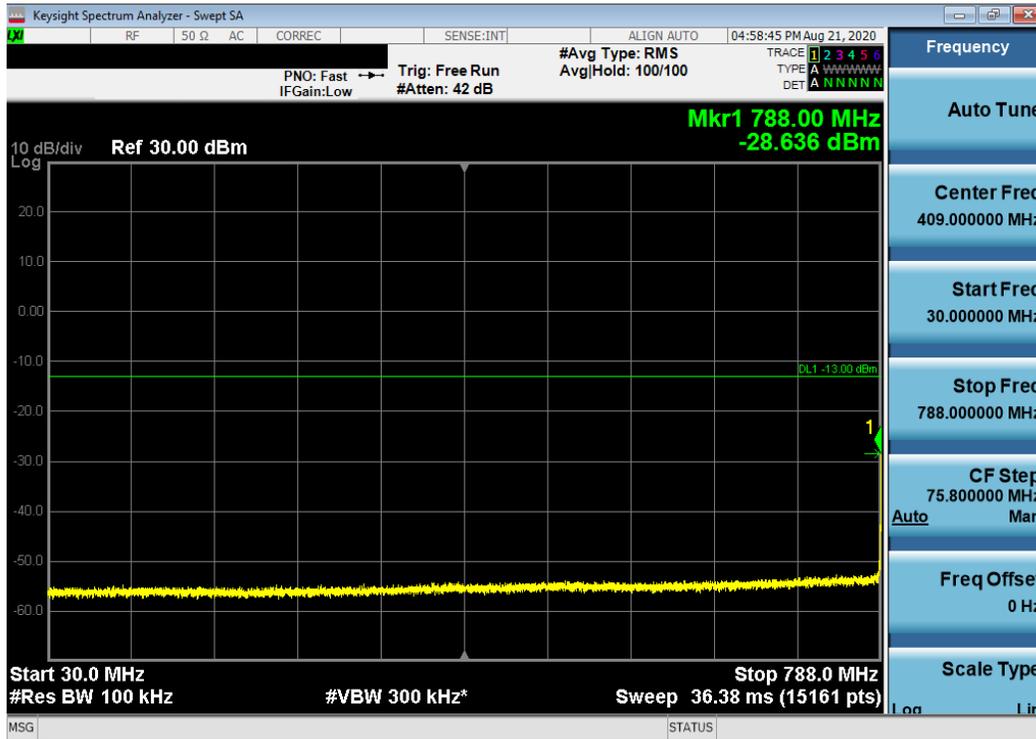

Plot 7-33. Conducted Spurious Plot (LTE Band 14 - 10MHz QPSK - RB Size 1, RB Offset 0)

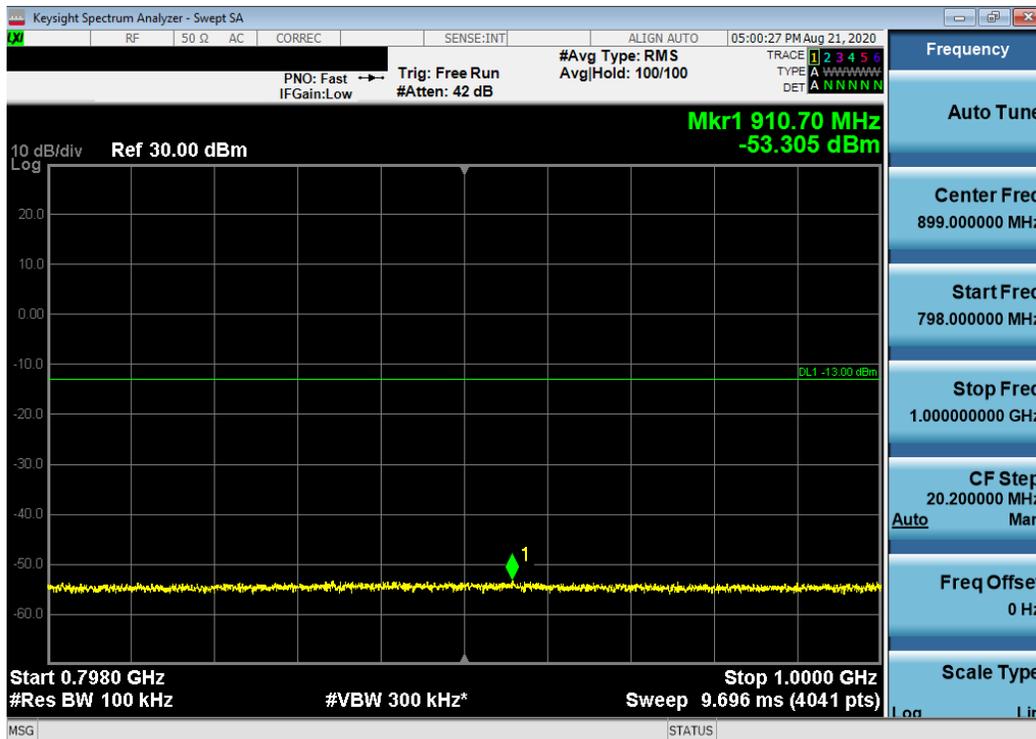

Plot 7-34. Conducted Spurious Plot (LTE Band 14 - 10MHz QPSK - RB Size 1, RB Offset 0)

FCC ID: ZNFK920AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 31 of 59



Plot 7-35. Conducted Spurious Plot (LTE Band 14 - 10MHz QPSK - RB Size 1, RB Offset 0)

FCC ID: ZNFK920AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 32 of 59

7.4 Band Edge Emissions at Antenna Terminal §2.1051

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

For LTE B26 operation under Part 90.691, the minimum permissible attenuation level of any spurious emission removed from the EA licensee's frequency block by greater than 37.5 kHz is $43 + 10\log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts. The minimum permissible attenuation level of any spurious emission removed from the EA licensee's frequency block by up to and including 37.5 kHz is $50 + 10\log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Span was set large enough so as to capture all out of band emissions near the band edge
2. RBW = 100 kHz
3. VBW = 300 kHz
4. Detector = RMS
5. Trace mode = trace average
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

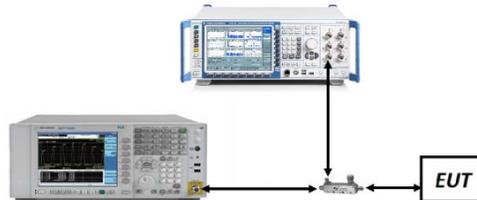


Figure 7-3. Test Instrument & Measurement Setup

Test Notes

For channel edge emission, the signal analyzer's "ACP" measurement capability is used.

FCC ID: ZNFK920AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 33 of 59

CDMA BC10




Plot 7-36. Channel Edge Plot (CDMA BC10 - Ch. 476)




Plot 7-37. Channel Edge Plot (CDMA BC10 - Ch. 684)

FCC ID: ZNFK920AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 34 of 59

LTE Band 26

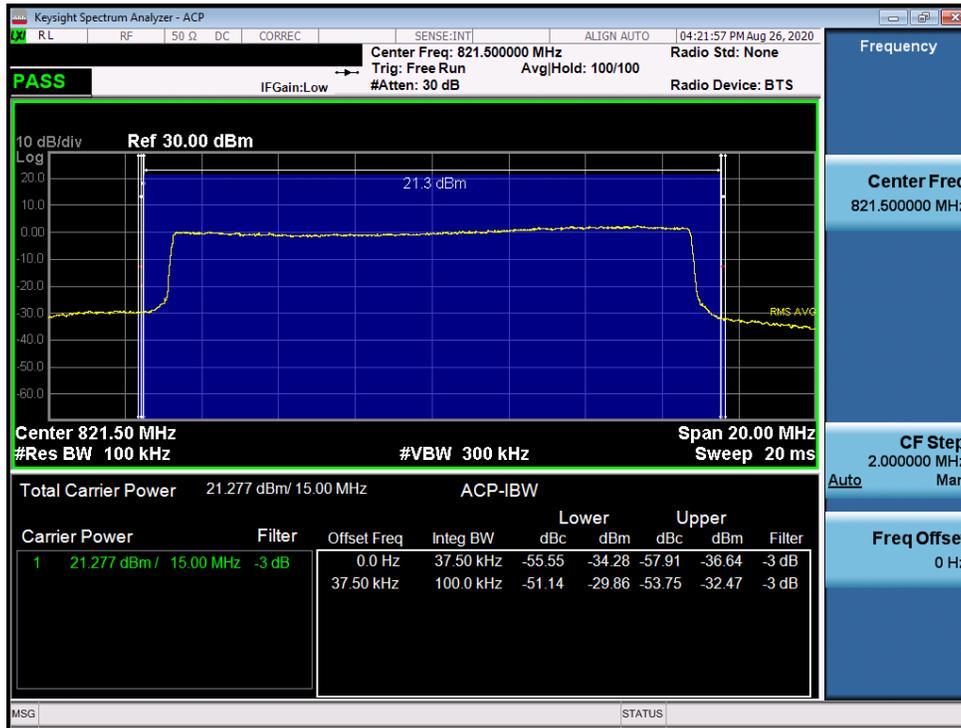


Plot 7-38. Channel Edge Plot (LTE Band 26 - 15MHz QPSK)

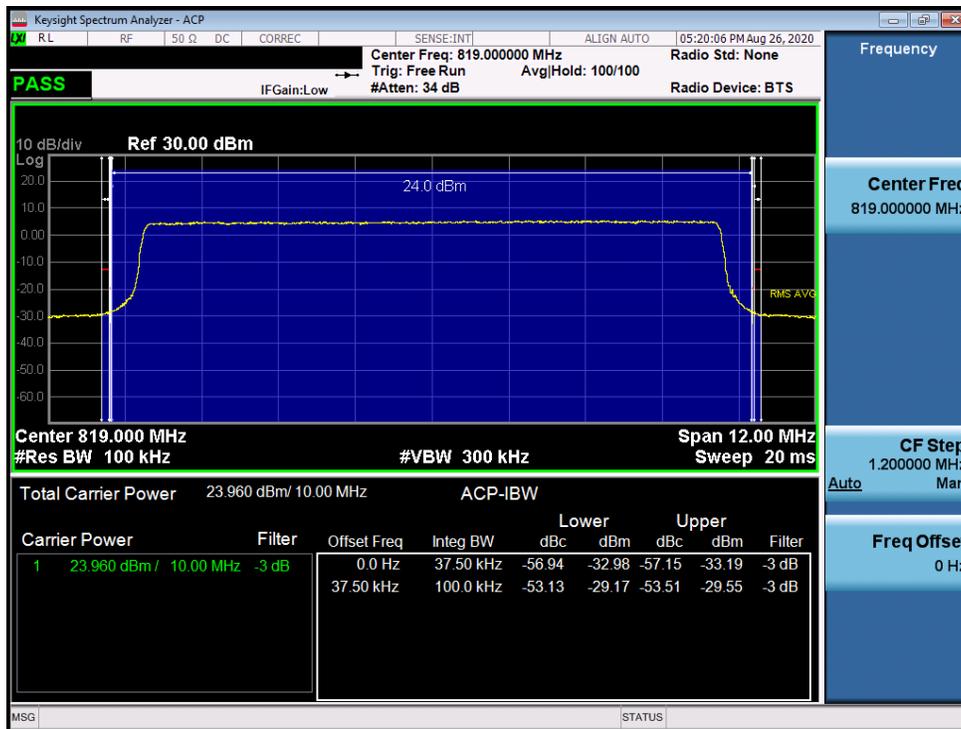


Plot 7-39. Channel Edge Plot (LTE Band 26 - 10MHz QPSK - Mid Channel)

FCC ID: ZNFK920AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 35 of 59

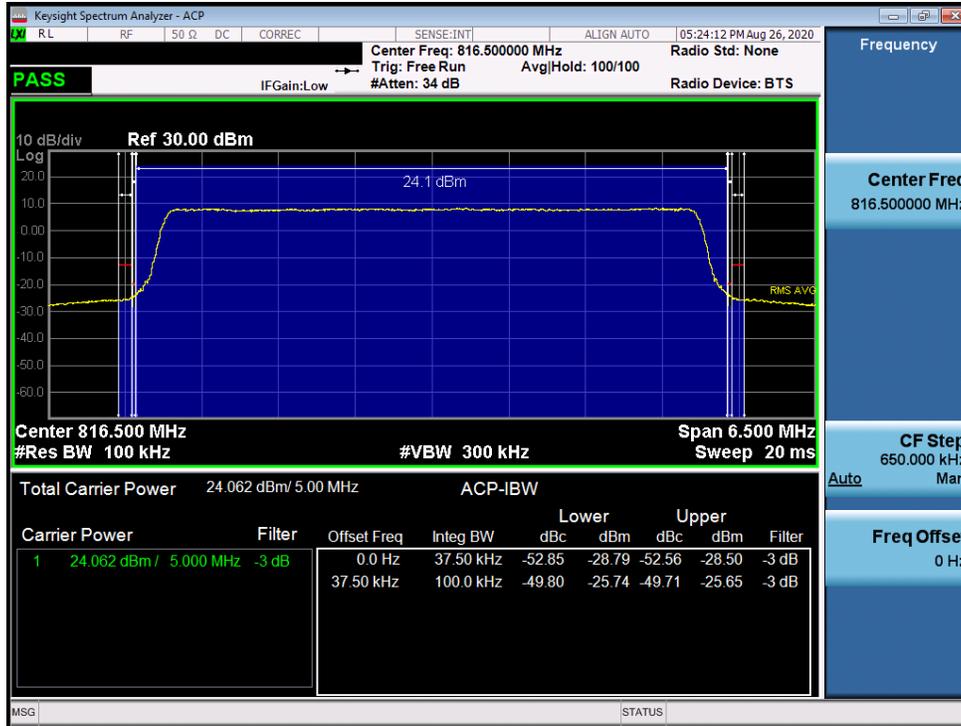

Plot 7-40. Channel Edge Plot (LTE Band 26 - 5MHz QPSK - Low Channel)

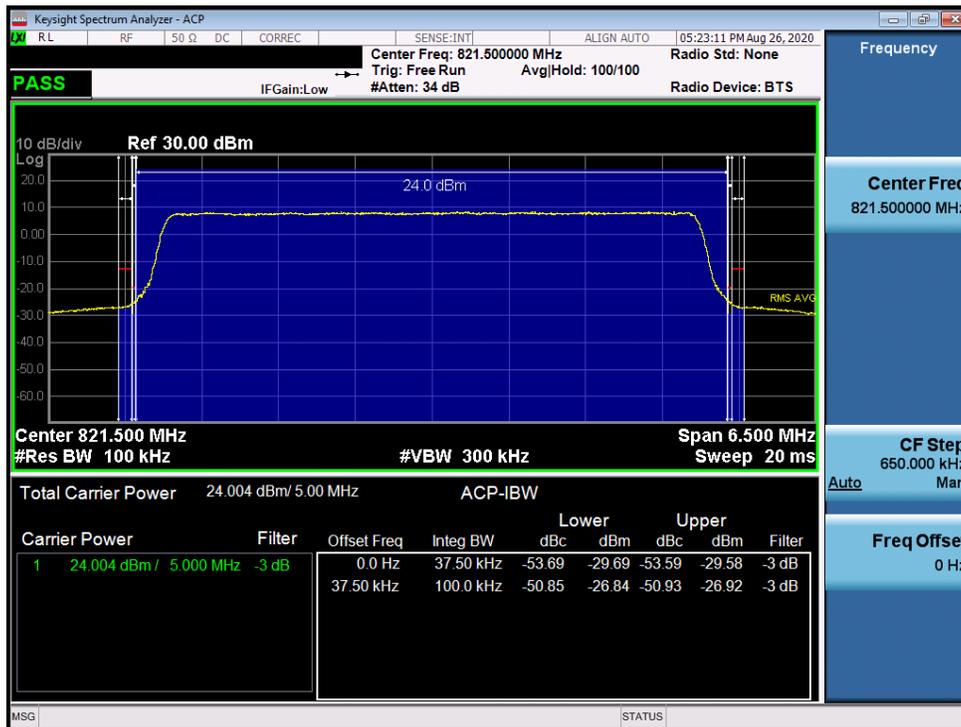

Plot 7-41. Channel Edge Plot (LTE Band 26 - 5MHz QPSK - High Channel)

FCC ID: ZNFK920AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 36 of 59



Plot 7-42. Channel Edge Plot (LTE Band 26 - 3MHz QPSK - Low Channel)




Plot 7-43. Channel Edge Plot (LTE Band 26 - 3MHz QPSK - High Channel)

FCC ID: ZNFK920AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 37 of 59




Plot 7-44. Channel Edge Plot (LTE Band 26 - 1.4MHz QPSK - Low Channel)

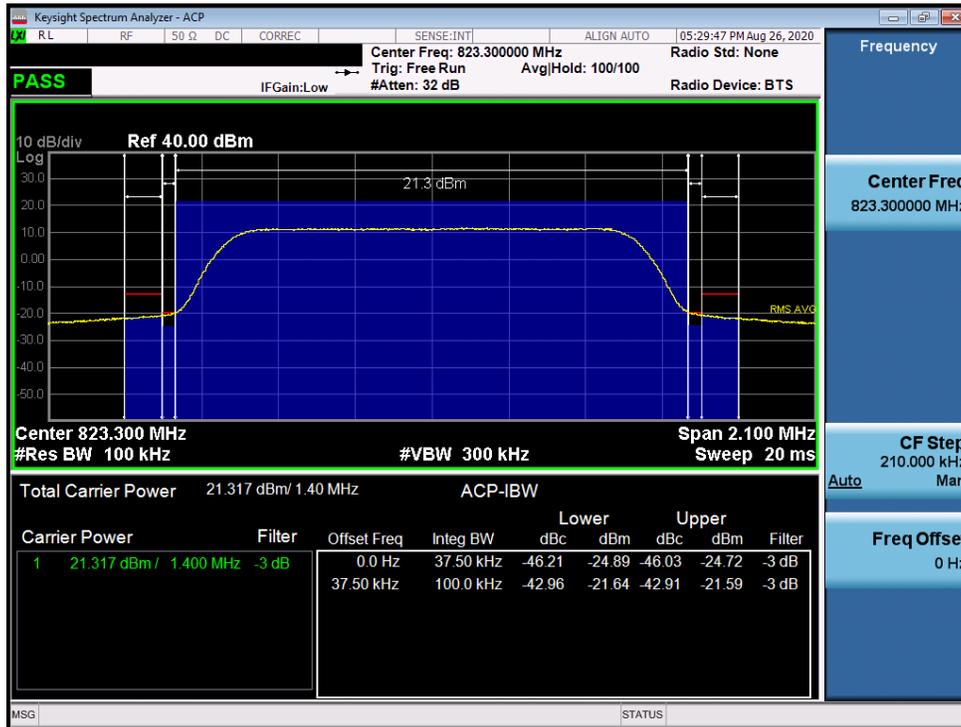

Plot 7-45. Channel Edge Plot (LTE Band 26 - 1.4MHz QPSK - High Channel)

FCC ID: ZNFK920AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 38 of 59

LTE Band 14

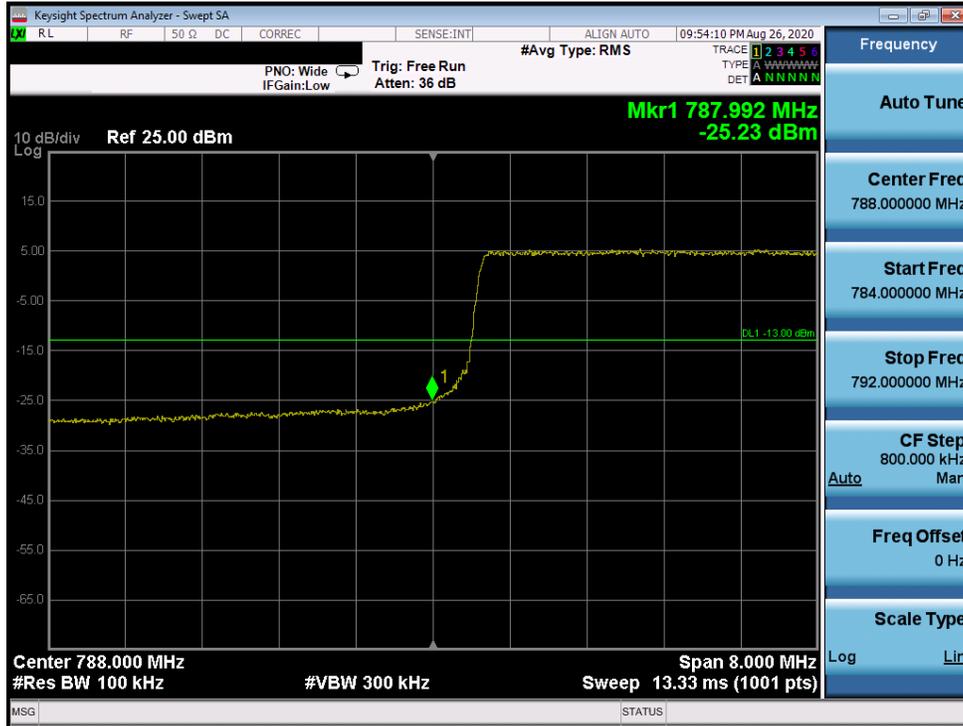

Plot 7-46. Band Edge Plot (LTE Band 14 - 10MHz QPSK - Low Channel)




Plot 7-47. Emission Mask Plot (LTE Band 14 - 10MHz QPSK - Low Channel)

FCC ID: ZNFK920AM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 39 of 59




Plot 7-48. Band Edge Plot (LTE Band 14 - 10MHz QPSK - High Channel)

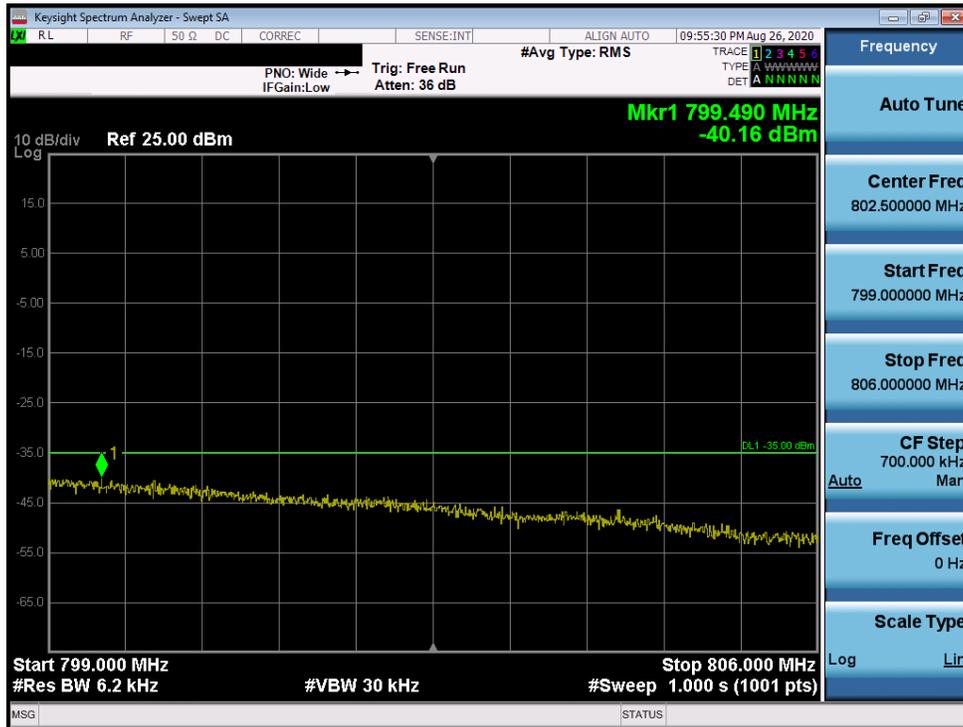

Plot 7-49. Emission Mask Plot (LTE Band 14 - 10MHz QPSK - High Channel)

FCC ID: ZNFK920AM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 40 of 59

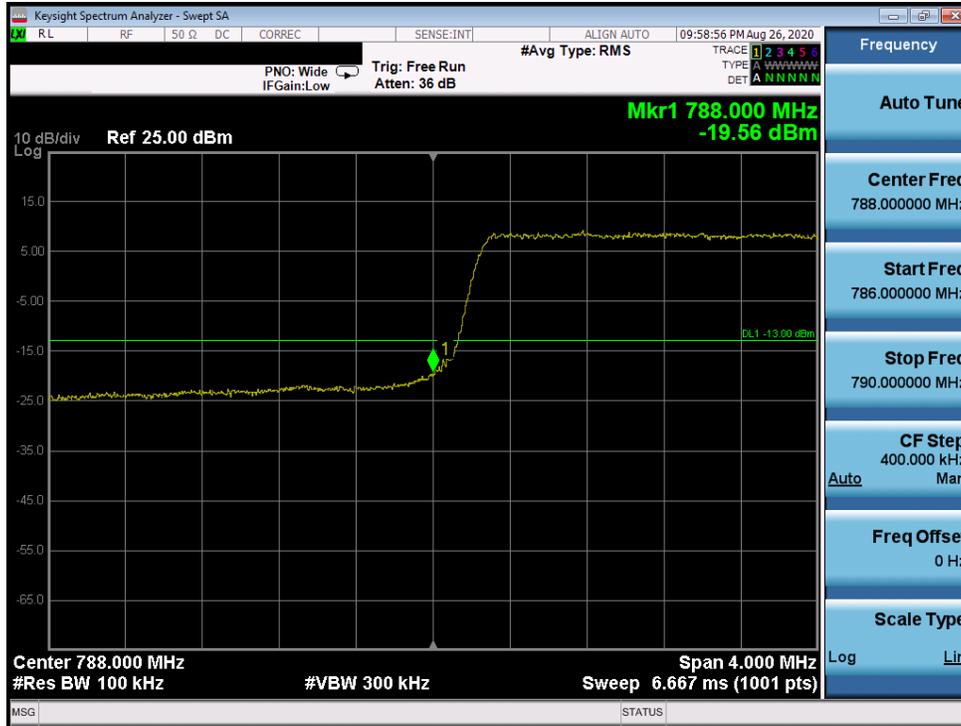

Plot 7-50. Band Edge Plot (LTE Band 14 - 5MHz QPSK - Low Channel)



Plot 7-51. Emission Mask Plot (LTE Band 14 - 5MHz QPSK - Low Channel)

FCC ID: ZNFK920AM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 41 of 59

7.5 Conducted Power Output Data

\$2.1046

Frequency [MHz]	Channel	Battery Type	Conducted Power [dBm]	Conducted Power [Watts]	Conducted Power Limit [dBm]	Margin [dB]
817.90	476	Standard	25.34	0.342	50.00	-24.66
823.10	684	Standard	25.32	0.340	50.00	-24.68

Table 7-2. CDMA BC10 Conducted Power Output Data

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]	Conducted Power [Watts]	Conducted Power Limit [dBm]	Margin [dB]
15 MHz	QPSK	26765	821.5	75 / 0	24.61	0.289	50.00	-25.39
	16-QAM	26765	821.5	75 / 0	23.56	0.227	50.00	-26.44
	64-QAM	26765	821.5	75 / 0	22.63	0.183	50.00	-27.37
10 MHz	QPSK	26740	819.0	50 / 0	24.74	0.298	50.00	-25.26
	16-QAM	26740	819.0	50 / 0	23.84	0.242	50.00	-26.16
	64-QAM	26740	819.0	50 / 0	23.71	0.235	50.00	-26.29
5 MHz	QPSK	26715	816.5	25 / 0	24.95	0.313	50.00	-25.05
		26765	821.5	25 / 0	24.89	0.308	50.00	-25.11
	16-QAM	26715	816.5	25 / 0	24.04	0.254	50.00	-25.96
		26765	821.5	25 / 0	23.88	0.244	50.00	-26.12
	64-QAM	26715	816.5	25 / 0	23.93	0.247	50.00	-26.07
		26765	821.5	25 / 0	23.95	0.248	50.00	-26.05
3 MHz	QPSK	26705	815.5	15 / 0	24.93	0.311	50.00	-25.07
		26775	822.5	15 / 0	24.89	0.308	50.00	-25.11
	16-QAM	26705	815.5	15 / 0	23.97	0.249	50.00	-26.03
		26775	822.5	15 / 0	23.84	0.242	50.00	-26.16
	64-QAM	26705	815.5	15 / 0	22.97	0.198	50.00	-27.03
		26775	822.5	15 / 0	22.98	0.199	50.00	-27.02
1.4 MHz	QPSK	26697	814.7	6 / 0	24.19	0.262	50.00	-25.81
		26783	823.3	6 / 0	24.09	0.256	50.00	-25.91
	16-QAM	26697	814.7	6 / 0	23.97	0.249	50.00	-26.03
		26783	823.3	6 / 0	23.83	0.242	50.00	-26.17
	64-QAM	26697	814.7	6 / 0	22.97	0.198	50.00	-27.03
		26783	823.3	6 / 0	22.82	0.191	50.00	-27.18

Table 7-3. LTE Band 26 Conducted Power Output Data

FCC ID: ZNFK920AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 43 of 59

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]	Conducted Power [Watts]	Conducted Power Limit [dBm]	Margin [dB]
10 MHz	QPSK	23330	793.0	1 / 0	25.16	0.328	50.00	-24.84
	16-QAM	23330	793.0	1 / 0	23.91	0.246	50.00	-26.09
	64-QAM	23330	793.0	1 / 0	22.60	0.182	50.00	-27.40
5 MHz	QPSK	23305	790.5	1 / 0	25.01	0.317	50.00	-24.99
		23330	793.0	1 / 0	25.11	0.324	50.00	-24.89
		23355	795.5	1 / 0	25.22	0.333	50.00	-24.78
	16-QAM	23305	790.5	1 / 0	23.80	0.240	50.00	-26.20
		23330	793.0	1 / 0	23.89	0.245	50.00	-26.11
		23355	795.5	1 / 0	23.55	0.226	50.00	-26.45
	64-QAM	23305	790.5	1 / 0	22.70	0.186	50.00	-27.30
		23330	793.0	1 / 0	22.65	0.184	50.00	-27.35
		23355	795.5	1 / 0	22.61	0.182	50.00	-27.39

Table 7-4. LTE Band 14 Conducted Power Output Data

NOTES:

1. For LTE mode, the device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1 RB.
2. This unit was tested with its standard battery.

FCC ID: ZNFK920AM	 PCTEST Proud to be part of  element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset	Page 44 of 59	

7.6 Radiated Power (ERP) §90.542(a)(7)

Test Overview

Effective Radiated Power (ERP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI/TIA-603-E-2016 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer’s “channel power” measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points \geq 2 x span / RBW
6. Detector = RMS
7. Trigger is set to “free run” for signals with continuous operation with the sweep times set to “auto”.
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: ZNFK920AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 45 of 59

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

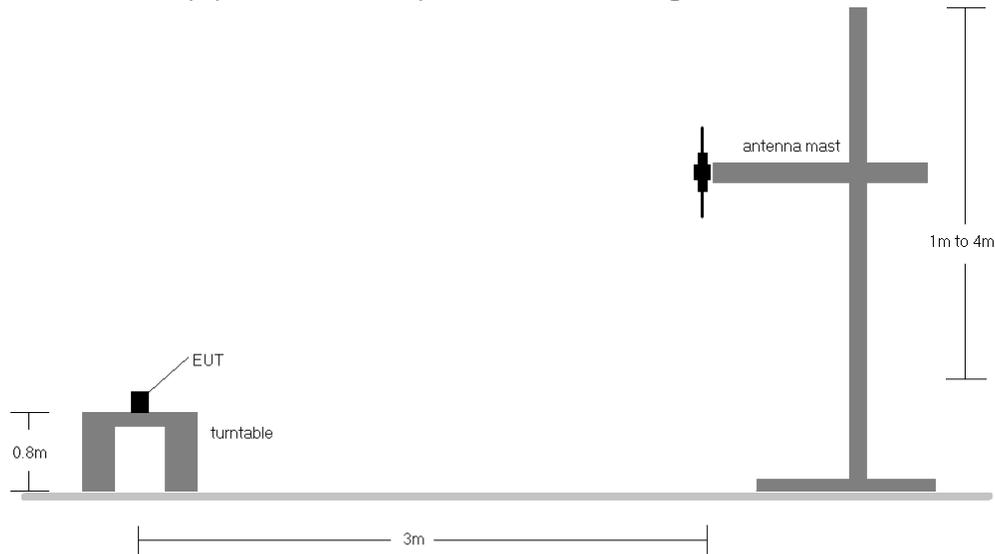


Figure 7-4. Radiated Test Setup <1GHz

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
15 MHz	QPSK	821.5	V	145.0	284.0	1.24	75 / 0	17.89	16.98	0.050	38.45	-21.47
	16-QAM	821.5	V	145.0	284.0	1.24	1 / 37	17.21	16.30	0.043	38.45	-22.15
	64-QAM	821.5	V	145.0	284.0	1.24	1 / 37	16.62	15.71	0.037	38.45	-22.74
	QPSK	816.5	H	144.0	260.0	1.23	1 / 25	15.28	14.36	0.027	38.45	-24.10

Table 7-54. ERP Data (Band 26)

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
10 MHz	QPSK	793.0	V	168.0	272.0	1.15	1 / 0	18.48	17.48	0.056	38.45	-20.98
	16-QAM	793.0	V	168.0	272.0	1.15	1 / 0	17.27	16.27	0.042	38.45	-22.19
	64-QAM	793.0	V	168.0	272.0	1.15	1 / 0	15.64	14.64	0.029	38.45	-23.82
5 MHz	QPSK	790.5	V	168.0	272.0	1.15	1 / 24	17.60	16.60	0.046	38.45	-21.85
		793.0	V	168.0	272.0	1.15	1 / 24	18.26	17.26	0.053	38.45	-21.20
		795.5	V	168.0	272.0	1.14	1 / 24	18.16	17.15	0.052	38.45	-21.30
	16-QAM	795.5	V	168.0	272.0	1.14	1 / 24	17.71	16.70	0.047	38.45	-21.75
	64-QAM	795.5	V	168.0	272.0	1.14	1 / 24	17.27	16.26	0.042	38.45	-22.19
QPSK	795.5	H	239.00	273.00	1.15	1 / 0	17.05	16.05	0.040	38.45	-22.41	

Table 7-55. ERP Data (Band 14)

FCC ID: ZNFK920AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset	Page 46 of 59	

7.7 Radiated Spurious Emissions Measurements

§2.1053

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

ANSI/TIA-603-E-2016 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW \geq 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points \geq 2 x span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

FCC ID: ZNFK920AM	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 47 of 59

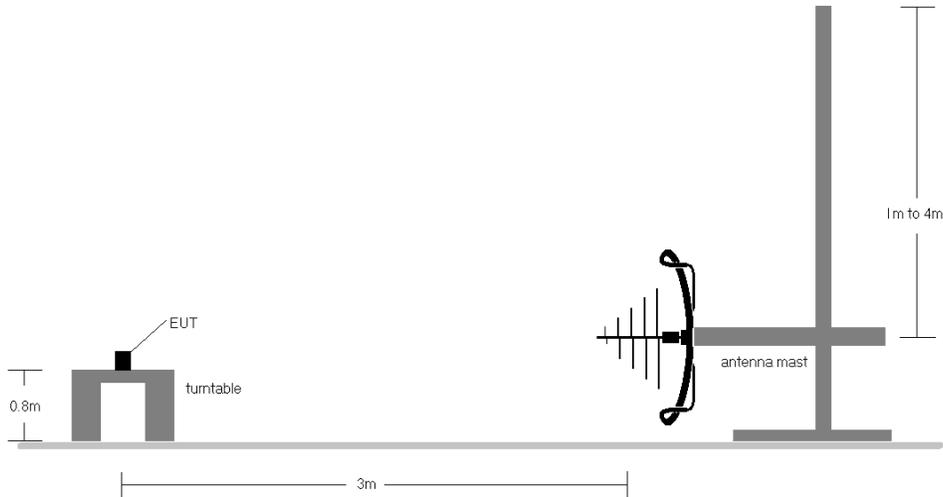


Figure 7-5. Test Instrument & Measurement Setup < 1GHz

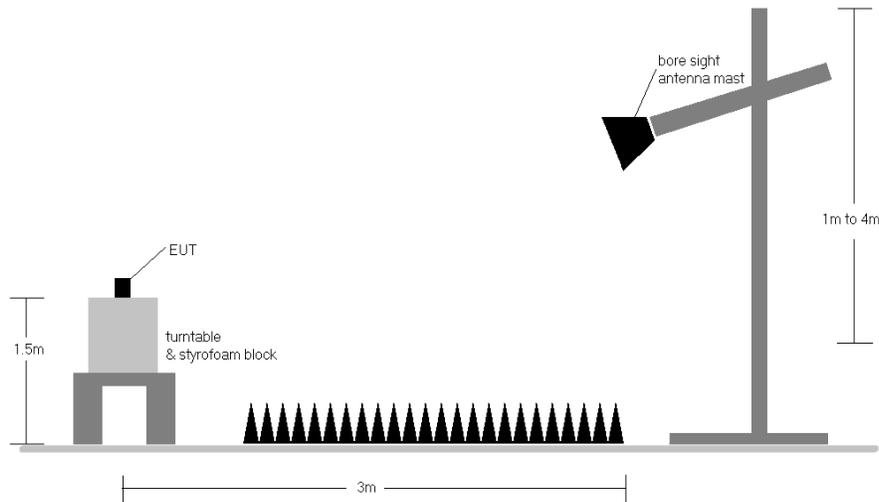



Figure 7-6. Test Instrument & Measurement Setup >1 GHz

Test Notes

1. For LTE mode, the device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1 RB.
2. This unit was tested with its standard battery.
3. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
4. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: ZNFK920AM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 48 of 59

CDMA BC10

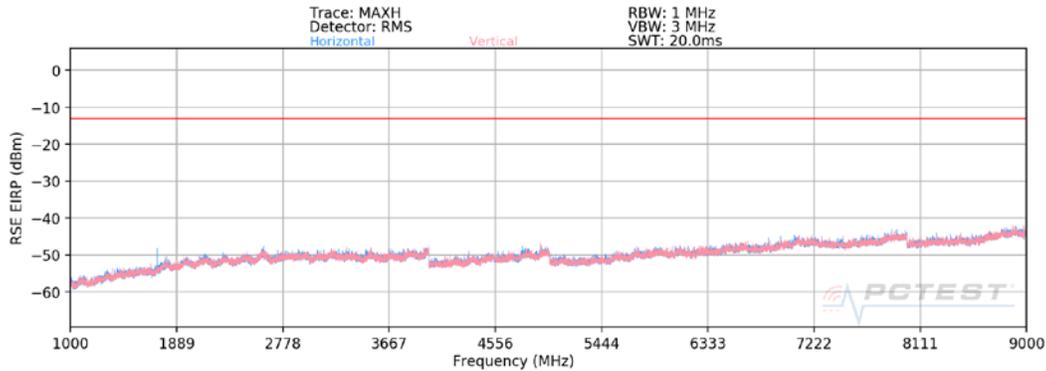

Plot 7-56. CDMA BC10 Radiated Spurious Plot

Frequency (MHz):	817.9
Modulation:	CDMA BC10

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1635.8	H	372	37	-66.39	2.91	43.52	-51.74	-13.00	-38.74
2453.7	H	182	360	-68.57	6.72	45.15	-50.10	-13.00	-37.10
3271.6	H	-	-	-68.37	7.40	46.03	-49.23	-13.00	-36.23
4089.5	H	-	-	-67.97	8.67	47.70	-47.56	-13.00	-34.56
4907.4	H	-	-	-68.07	10.16	49.09	-46.17	-13.00	-33.17

Table 7-5. CDMA BC10 Radiated Spurious Data (Ch. 476)


Frequency (MHz):	823.1
Modulation:	CDMA BC10

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1646.2	H	291	30	-64.08	2.92	45.84	-49.42	-13.00	-36.42
2469.3	H	283	16	-68.41	6.90	45.49	-49.76	-13.00	-36.76
3292.4	H	-	-	-67.00	7.40	47.40	-47.86	-13.00	-34.86
4115.5	H	-	-	-68.29	8.79	47.50	-47.76	-13.00	-34.76
4938.6	H	-	-	-66.72	10.78	51.06	-44.20	-13.00	-31.20

Table 7-6. CDMA BC10 Radiated Spurious Data (Ch. 684)

FCC ID: ZNFK920AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 49 of 59

LTE Band 26

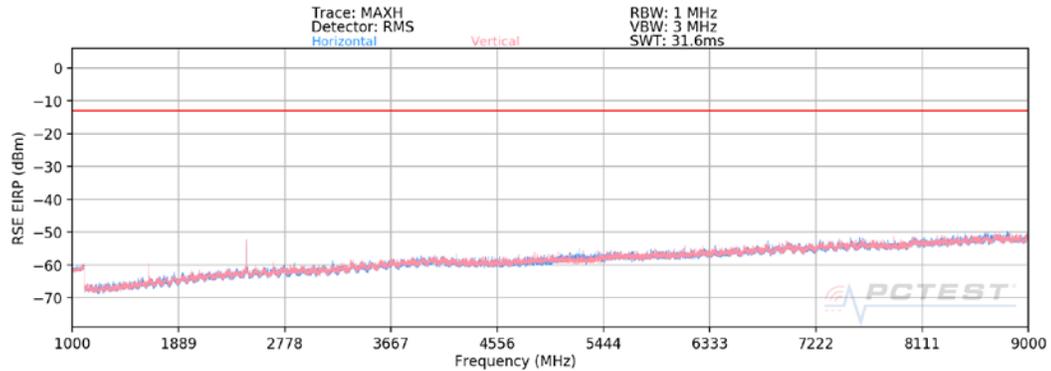

Plot 7-57. Radiated Spurious Plot (LTE Band 26)


Bandwidth (MHz):	10
Frequency (MHz):	819.0
Modulation Signal:	QPSK

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1638.0	V	133	45	-67.03	-7.05	32.92	-62.34	-13.00	-49.34
2457.0	V	130	39	-64.07	-3.30	39.63	-55.62	-13.00	-42.62
3276.0	V	-	-	-76.10	-1.34	29.56	-65.70	-13.00	-52.70
4095.0	V	-	-	-76.79	1.61	31.82	-63.44	-13.00	-50.44
4914.0	V	-	-	-78.09	2.65	31.56	-63.70	-13.00	-50.70

Table 7-7. Radiated Spurious Data (LTE Band 26 – Mid Channel)

FCC ID: ZNFK920AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 50 of 59

LTE Band 14

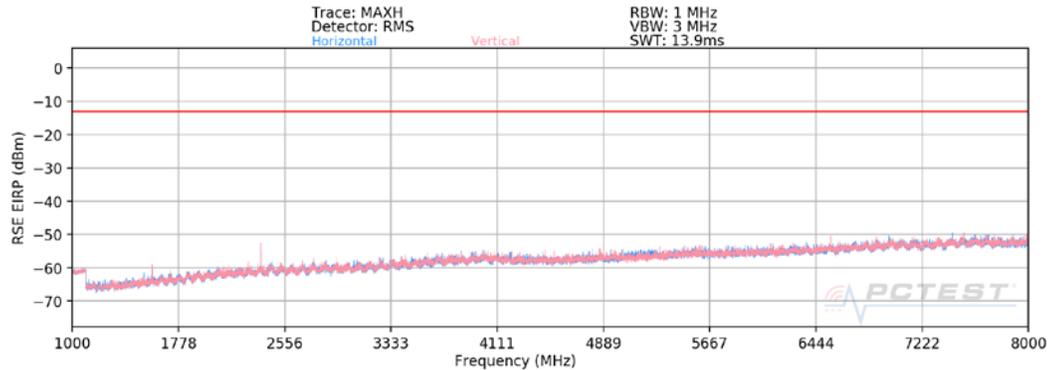

Plot 7-58. Radiated Spurious Plot (LTE Band 14)

Bandwidth (MHz):	10
Frequency (MHz):	819.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 25
Detector / Trace Mode:	RMS / Average
RBW / VBW:	1MHz / 3MHz

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
1638.0	V	133	45	-67.03	-7.05	32.92	-62.34	-13.00	-49.34
2457.0	V	130	39	-64.07	-3.30	39.63	-55.62	-13.00	-42.62
3276.0	V	-	-	-76.10	-1.34	29.56	-65.70	-13.00	-52.70
4095.0	V	-	-	-76.79	1.61	31.82	-63.44	-13.00	-50.44
4914.0	V	-	-	-78.09	2.65	31.56	-63.70	-13.00	-50.70

Table 7-8. Radiated Spurious Data (LTE Band 14 – Mid Channel)

FCC ID: ZNFK920AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 51 of 59

7.8 Frequency Stability / Temperature Variation

§2.1055 §90.213

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency.

Test Procedure Used

ANSI/TIA-603-E-2016

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes

None

FCC ID: ZNFK920AM	 PCTEST [®] Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset	Page 52 of 59	

Frequency Stability / Temperature Variation
\$2.1055, \$90.213

Operating Frequency (Hz):	817,900,000
Ref. Voltage (VDC):	3.80
Deviation Limit:	± 0.00025% or 2.5 ppm

Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	817,900,046	46	0.0000056
		- 20	817,900,026	26	0.0000032
		- 10	817,899,923	-77	-0.0000094
		0	817,900,090	90	0.0000110
		+ 10	817,900,068	68	0.0000083
		+ 20 (Ref)	817,900,035	35	0.0000043
		+ 30	817,900,137	137	0.0000168
		+ 40	817,900,125	125	0.0000153
Battery Endpoint	3.40	+ 20	817,900,095	95	0.0000116

Table 7-9. CDMA BC10 Frequency Stability Data

FCC ID: ZNFK920AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset	Page 53 of 59	

Frequency Stability / Temperature Variation
\$2.1055, \$90.213

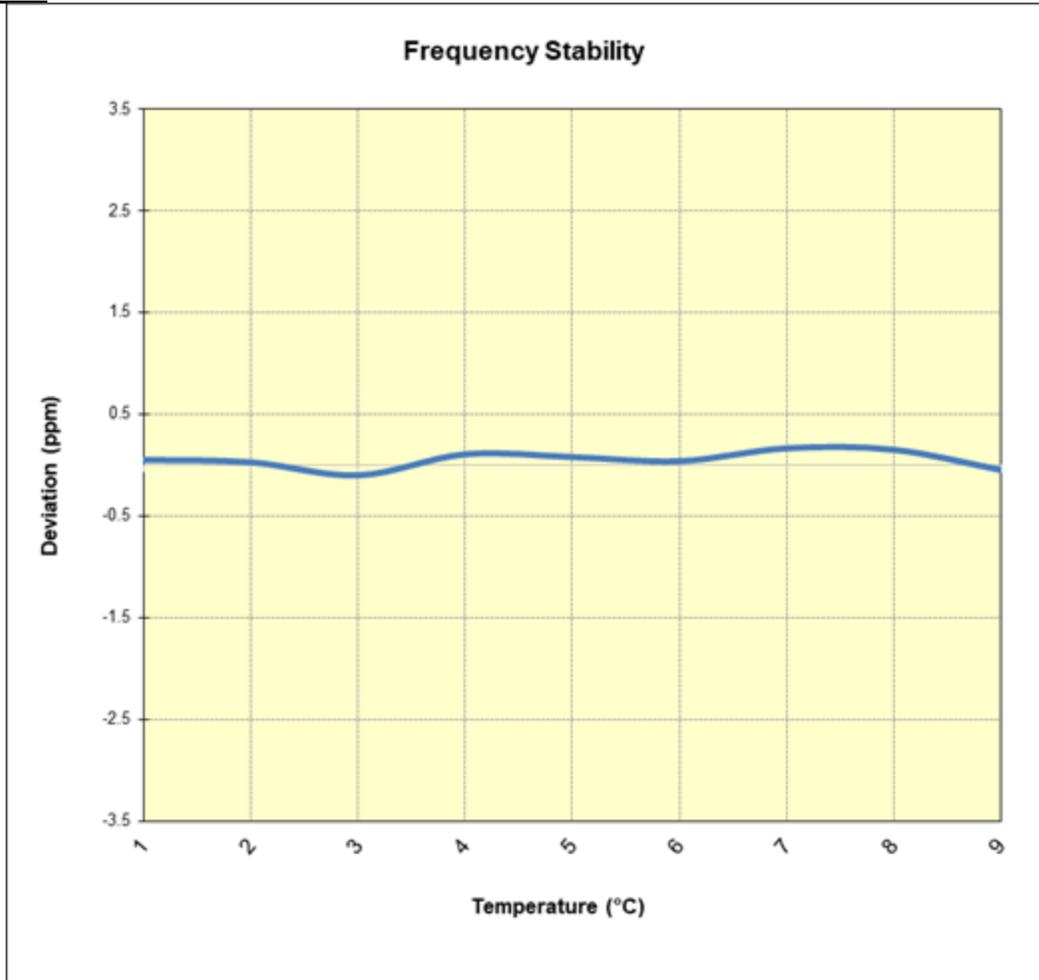


Figure 7-7. CDMA BC10 Frequency Stability Chart

FCC ID: ZNFK920AM	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	LG	Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 54 of 59

Frequency Stability / Temperature Variation
§2.1055, §90.213

Operating Frequency (Hz):	819,000,000
Ref. Voltage (VDC):	3.80
Deviation Limit:	± 0.00025% or 2.5 ppm

Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	818,999,970	-30	-0.0000037
		- 20	819,000,101	101	0.0000123
		- 10	818,999,997	-3	-0.0000004
		0	819,000,015	15	0.0000018
		+ 10	818,999,950	-50	-0.0000061
		+ 20 (Ref)	819,000,017	17	0.0000021
		+ 30	819,000,123	123	0.0000150
		+ 40	818,999,852	-148	-0.0000181
Battery Endpoint	3.40	+ 50	818,999,937	-63	-0.0000077
		+ 20	819,000,012	12	0.0000015

Table 7-10. LTE Band 26 Frequency Stability Data

FCC ID: ZNFK920AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset	Page 55 of 59	

Frequency Stability / Temperature Variation
\$2.1055, \$90.213

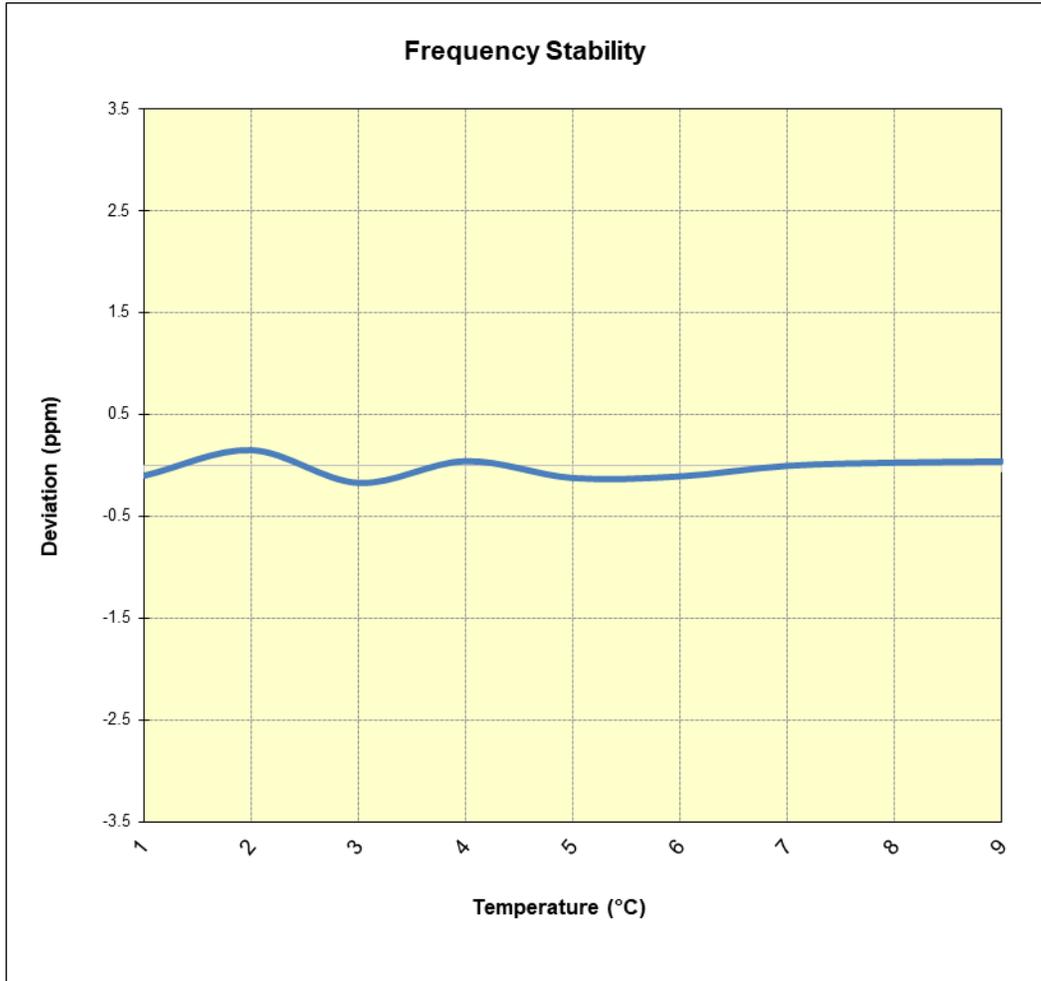


Table 7-11. LTE Band 26 Frequency Stability Chart

FCC ID: ZNFK920AM	Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 56 of 59

Frequency Stability / Temperature Variation
§2.1055, §90.213

Operating Frequency (Hz):	793,000,000
Ref. Voltage (VDC):	3.80

Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.80	- 30	793,000,136	136	0.0000172
		- 20	793,000,011	11	0.0000014
		- 10	793,000,132	132	0.0000166
		0	792,999,938	-62	-0.0000078
		+ 10	792,999,983	-17	-0.0000021
		+ 20 (Ref)	792,999,915	-85	-0.0000107
		+ 30	792,999,863	-137	-0.0000173
		+ 40	792,999,999	-1	-0.0000001
		+ 50	793,000,138	138	0.0000174
Battery Endpoint	3.40	+ 20	793,000,111	111	0.0000140

Table 7-12. LTE Band 14 Frequency Stability Data

FCC ID: ZNFK920AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 57 of 59

Frequency Stability / Temperature Variation
\$2.1055, \$90.213

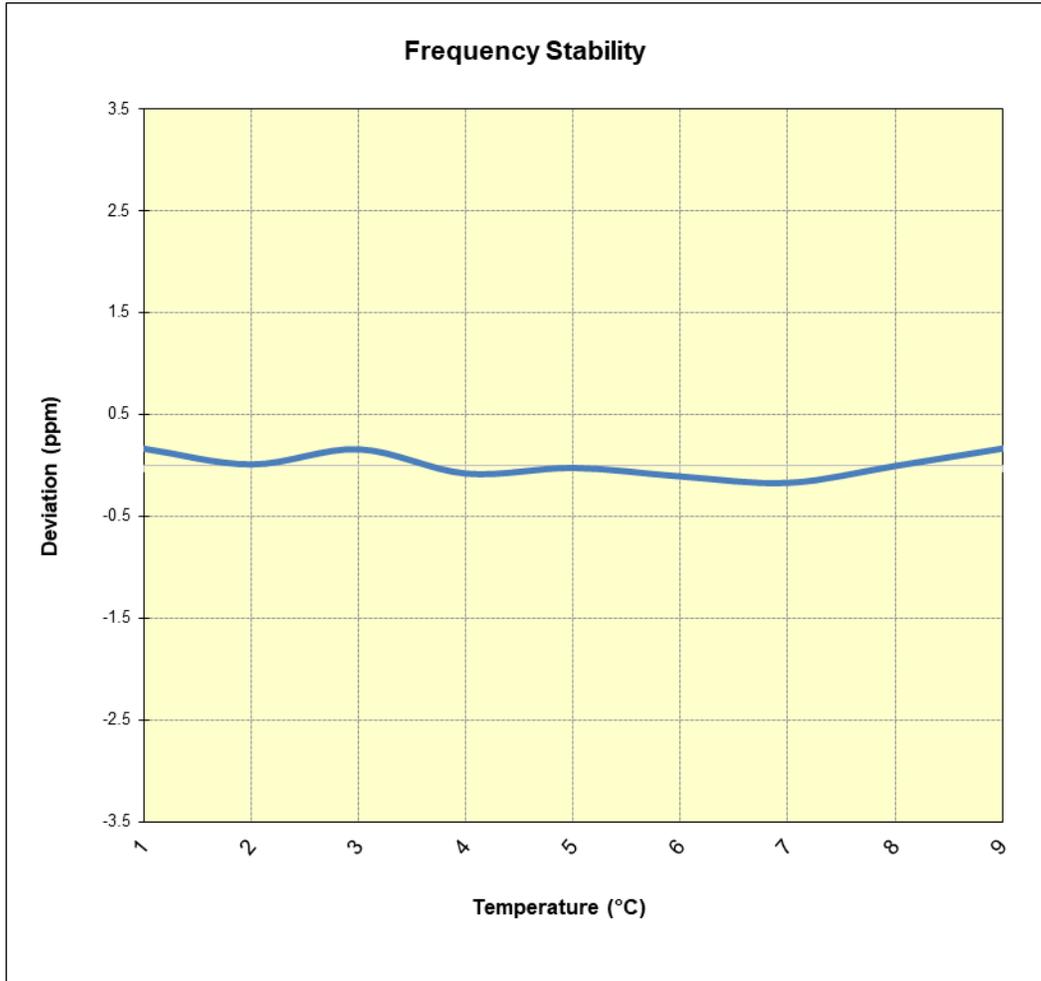


Table 7-13. LTE Band 14 Frequency Stability Chart

FCC ID: ZNFK920AM	Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 58 of 59

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **LG Portable Handset FCC ID: ZNFK920AM** complies with all the requirements of Parts 90 of the FCC rules.

FCC ID: ZNFK920AM		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M2007130107-04.ZNF	Test Dates: 07/30/2020 - 09/03/2020	EUT Type: Portable Handset		Page 59 of 59