



HCT CO., LTD.

HCT CO.,LTD

CERTIFICATION DIVISION

74, SEOICHEON-RO, 578BEON-GIL, MAJANG-MYEON, ICHEON-SI, GYEONGGI-DO, KOREA
TEL: +82 31 645 6300 FAX: +82 31 645 6401

EMI CERTIFICATION REPORT

Applicant:

LG Electronics MobileComm U.S.A., Inc.
1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Date of Issue: April 08, 2013

Test Report No.: HCTE1304FE10

Test Site: HCT CO., LTD.

HCT FRN: 0005-8664-21

FCC ID:

ZNFL05E

Rule Part(s) / Standard(s) : FCC PART 15 Subpart B Class B
Equipment Type : Cellular/PCS GSM/GPRS and Cellular WCDMA/ HSDPA/HSUPA
Phone with Bluetooth/WLAN, NFC(Felica), A-GPS, Wireless
Charger, Wi-Fi Direct
Model Name : L-05E
Port / Connector(s) : USB Port / Headset Port

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been subject to a denial of Federal benefits that includes FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862

Report prepared by
: Jeong-Hyeon Choi
Test Engineer of EMC Team

Approved by
: Sang-Jun Lee
Manager of EMC Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

DOCUMENT HISTORY

The revision history for this document is shown in table.

Version	Date	Description
HCTE1304FE10	April 08, 2013	Initial Release

TABLE OF CONTENTS

	PAGE
1. GENERAL INFORMATION	4
1.1 Product Description.....	4
1.2 Related Submittal(s) / Grant(s).....	4
1.3 Tested System Details.....	5
1.4 Cable Description	6
1.5 Noise Suppression Parts on Cable. (I/O cable)	6
1.6 Test Methodology	7
1.7 Test Facility	7
1.8 Frequency Range of Radiated Measurements	7
2. SYSTEM TEST CONFIGURATION.....	8
2.1 Configuration of Test System	8
3. PRELIMINARY TEST	9
3.1 Conducted Emission Test	9
3. 2 Radiated Emission Test	9
4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY	10
4.1 Conducted Emission Test	10
4.2 Radiated Emission Test	15
5. FIELD STRENGTH CALCULATION	17
6. TEST EQUIPMENT	18
7. CONCLUSION	19

ATTACHMENT: TEST SETUP PHOTOGRAPHS

1. GENERAL INFORMATION

1.1 Product Description

Equipment Under Test is **EUT type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN, NFC(Felica), A-GPS, Wireless Charger, Wi-Fi Direct, Model: L-05E** manufactured by **LG Electronics MobileComm U.S.A., Inc.** Its basic purpose is used for communications.

Model	L-05E
FCC ID	ZNFL05E
EUT Type	Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN, NFC(Felica), A-GPS, Wireless Charger, Wi-Fi Direct
TX Frequency	824.20 MHz to 848.80 MHz (GSM 850) 1 850.20 MHz to 1 909.80 MHz (GSM 1 900) 826.40 MHz to 846.60 MHz (WCDMA 850)
RX Frequency	869.20 MHz to 893.80 MHz (GSM 850) 1 930.20 MHz to 1 989.80 MHz (GSM 1 900) 871.40 MHz to 891.60 MHz (WCDMA 850)

1.2 Related Submittal(s) / Grant(s)

Original submittal only.

1.3 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Manufacturer	Model Name	FCC ID / DoC	Connected To
EUT	LG	L-05E	ZNFL05E	Notebook PC Headset
USB cable	NINGBO	EAD62289301	-	E.U.T Notebook PC
Headset	I-SOUND	SGEY0007610	-	E.U.T
Notebook PC	H.P	ProBook6560b	DoC	EUT Notebook PC adaptor
Notebook PC adaptor	CHICONY POWER TECHNOLOGY	Series PPP012H-S	-	Notebook PC
Mouse	Radio shack	Series 2-button mouse	FSUGMZE3	Notebook PC
Net hard	LG	N1A1DD1	DoC	Notebook PC Net hard adaptor
Net hard adaptor	Yang Ming Industrial	DA-60M12	-	Net hard
RJ45 cable	-	-	-	Net hard Notebook PC
SD card	SanDisk	8 GB	-	E.U.T

1.4 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (m)
EUT	Micro USB	Y	Y	(P,D)1.2
	Headset jack	-	N	(D)1.2
Notebook PC	RJ 45	-	N	(D)1.5
	Serial (Mouse)	-	Y	(D)1.8

* The marked "(D)" means the data cable and "(P)" means the power cable.

1.5 Noise Suppression Parts on Cable. (I/O cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
EUT	Micro USB	N	N/A	Y	Both End
	Headset jack	N	N/A	Y	EUT End
Notebook PC	RJ 45	N	N/A	N	Both End
	Serial (Mouse)	-	N/A	Y	Notebook PC End

1.6 Test Methodology

Both Conducted and Radiated testing was performed according to the procedures in ANSI C63.4/2003. Radiated testing was performed at an antenna to EUT distance of 3 m

1.7 Test Facility

Chamber used to collect the test data is located at the 74, SEOICHEON-RO, 578BEON-GIL, MAJANG-MYEON, ICHEON-SI, GYEONGGI-DO, KOREA. Those measurement facilities are constructed in conformance with the requirements of ANSI C63.4.

Measurement Facilities	Reg. No.
Radiated Field strength measurement facility (3m)	90661(Mar. 02, 2011)
Radiated Field strength measurement facility (10m)	90661 (Sep. 03, 2010)

1.8 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower


2. SYSTEM TEST CONFIGURATION

2.1 Configuration of Test System

Power Line Conducted test : EUT was connected to LISN via Notebook PC adaptor and Base Station. Preliminary Power Line Conducted Emission tests were performed by using the procedure in ANSI C63.4/2003 7.2.3 to determine the worst operating conditions.

Radiated Emission test : Preliminary Radiated Emission tests were performed by using the procedure in ANSI C63.4/2003 8.3.1.1 to determine the worst operating condition. Final Radiated Emission tests were performed at 3 m semi-anechoic chamber.

[Configuration of Tested System]

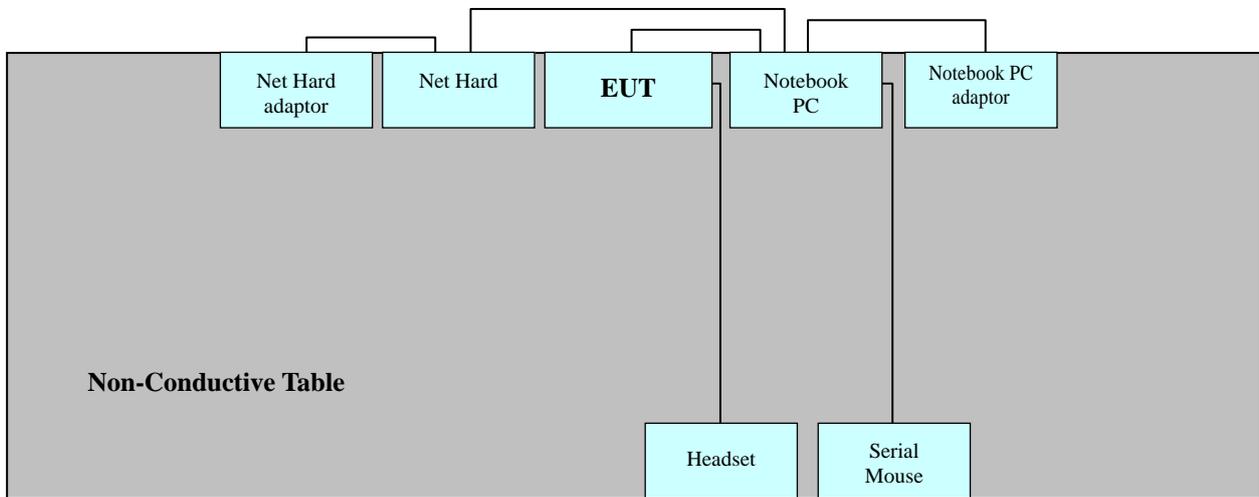

Power Line: 120 VAC

3. PRELIMINARY TEST

3.1 Conducted Emission Test

- It was tested Data Communication mode, after connecting all peripheral devices.

Operation Mode: Data mode

3. 2 Radiated Emission Test

- It was tested Data Communication mode, after connecting all peripheral devices.

Operation Mode: Data mode

4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY

4.1 Conducted Emission Test

The following table shows the highest levels of conducted emissions on both polarization of hot and neutral line.

Limit Apply to	: FCC PART 15 Subpart B Class B
Detector	: Quasi-Peak, Average (6 dB Bandwidth: 9 kHz)
Operation Mode	: Data mode
Temperature	: 21.6 °C
Humidity Level	: 34.2 %
Test Date	: April 05, 2013

Frequency (MHz)	Transd (dB)	Conductor	Quasi-Peak			Average		
			Limit	Measurement Level	Result Level	Limit	Measurement Level	Result Level
			(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dBuV)
0.198	9.9	N	64	39.1	49.0	54	21.00	30.90
0.201	9.7	H	64	39.8	49.5	54	23.00	32.70
0.214	9.7	H	63	36.8	46.5	53	-	-
3.832	10.3	N	56	27.3	37.6	46	17.30	27.60
4.404	10.1	H	56	-	-	46	19.20	29.30
20.336	12.1	N	60	-	-	50	18.30	30.40

※ **NOTE:** Refer to page 11 to page 14 for details.

1. Line H = Hot, Line N = Neutral
2. Transd = LISN factor + Cable Loss factor
3. The worst-case emissions are reported.


HCT

EMC

EUT: L-05E
 Manufacturer: LG
 Operating Condition: DATA MODE
 Test Site: SHIELD ROOM
 Operator: JH CHOI
 Test Specification: FCC PART 15 B
 Comment: H

SCAN TABLE: "FCC PART 15 B(H)"

Short Description:		FCC PART 15 CLASS B				
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	500.0 kHz	1.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

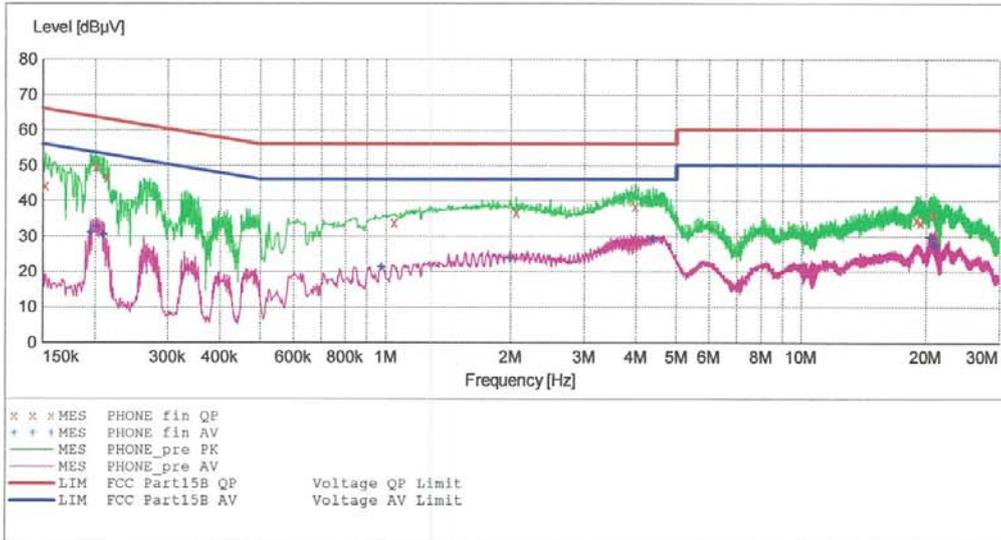

MEASUREMENT RESULT: "PHONE_fin_QP"

4/5/2013 10:19AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.152010	44.20	9.8	66	21.7	---	---
0.201010	49.50	9.7	64	14.0	---	---
0.214010	46.50	9.7	63	16.6	---	---
1.048000	33.90	9.8	56	22.1	---	---
2.060000	36.70	9.9	56	19.3	---	---
3.980000	38.50	10.1	56	17.5	---	---
18.916000	34.50	11.6	60	25.5	---	---
19.400000	33.70	11.7	60	26.3	---	---
20.824000	36.00	11.8	60	24.0	---	---

MEASUREMENT RESULT: "PHONE_fin AV"

4/5/2013 10:19AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.195010	31.00	9.7	54	22.8	---	---
0.201010	32.70	9.7	54	20.8	---	---
0.210010	30.40	9.7	53	22.8	---	---
0.976000	21.40	9.8	46	24.6	---	---
1.988000	23.70	9.9	46	22.3	---	---
4.404000	29.30	10.1	46	16.7	---	---
20.480000	29.50	11.8	50	20.5	---	---
20.896000	27.50	11.8	50	22.5	---	---
20.964000	27.10	11.8	50	22.9	---	---


HCT

EMC

EUT: L-05E
 Manufacturer: LG
 Operating Condition: DATA MODE
 Test Site: SHIELD ROOM
 Operator: JH CHOI
 Test Specification: FCC PART 15 CLASS B
 Comment: N

SCAN TABLE: "FCC PART 15 B(N)"

Short Description:			FCC PART 15 CLASS B			
Start Frequency	Stop Frequency	Step Width	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None
			Average			

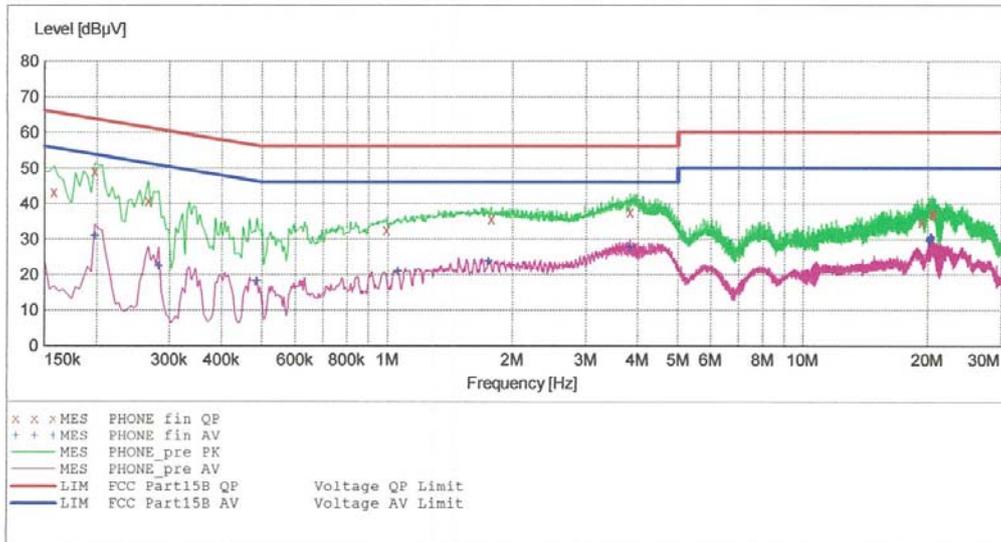

MEASUREMENT RESULT: "PHONE_fin QP"

4/5/2013 10:23AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.158010	43.20	10.0	66	22.4	---	---
0.198010	49.00	9.9	64	14.7	---	---
0.266010	40.80	10.0	61	20.4	---	---
0.996000	32.50	10.0	56	23.5	---	---
1.776000	35.70	10.1	56	20.3	---	---
3.832000	37.60	10.3	56	18.4	---	---
19.328000	34.70	12.0	60	25.3	---	---
20.460000	37.30	12.1	60	22.7	---	---
20.676000	37.00	12.1	60	23.0	---	---

MEASUREMENT RESULT: "PHONE_fin AV"

4/5/2013 10:23AM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.198010	30.90	9.9	54	22.8	---	---
0.282010	22.40	10.0	51	28.4	---	---
0.486010	18.20	10.0	46	28.0	---	---
1.060000	21.00	10.0	46	25.0	---	---
1.752000	23.70	10.1	46	22.3	---	---
3.832000	27.60	10.3	46	18.4	---	---
20.208000	29.40	12.1	50	20.6	---	---
20.268000	30.00	12.1	50	20.0	---	---
20.336000	30.40	12.1	50	19.6	---	---

4.2 Radiated Emission Test

The following table shows the highest levels of Radiated Emissions on both polarization of horizontal and vertical.

-For measurement below 1 GHz

Limit Apply to : FCC PART 15 Subpart B Class B

Detector : Quasi-Peak (6 dB Bandwidth: 120 kHz)

Operation Mode : Data mode

Temperature : 20.1 °C

Humidity Level : 34.0 %

Test Date : April 04, 2013

Frequency (MHz)	Reading (dBUV)	Polarity (H/V)	Antenna Height (m)	Correction Factor		Limit (dBUV/m)	Level (dBUV/m)	Margin (dB)
				Antenna (dB/m)	Cable (dB)			
49.800	15.34	V	1.0	12.40	3.56	40.0	31.3	8.7
51.500	17.02	V	1.0	12.31	3.57	40.0	32.9	7.1
53.100	17.20	V	1.0	12.21	3.58	40.0	33.0	7.0
55.700	14.34	V	1.0	12.06	3.61	40.0	30.0	10.0
61.100	13.48	V	1.0	11.67	3.65	40.0	28.8	11.2
74.700	16.56	V	1.0	9.40	3.74	40.0	29.7	10.3

※ **NOTE:**

1. The worst-case emissions are reported.

-For measurement above 1 GHz

Limit Apply to : FCC PART 15 Subpart B Class B

Detector : Peak mode: Peak (RBW: 1 MHz, VBW: 1 MHz)
 : Average mode: Peak (RBW: 1 MHz, VBW: 10 Hz)

Operation Mode : Data mode

Temperature : 20.3 °C

Humidity Level : 34.8 %

Test Date : April 05, 2013

Frequency (GHz)	Peak			POL	Average		
	Total (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)		Total (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
1.3200	51.10	74	22.9	V	35.80	54	18.2
1.9100	49.90	74	24.1	V	30.00	54	24.0
2.6600	51.40	74	22.6	V	32.20	54	21.8

※ NOTE:

1. The worst-case emissions are reported.
2. Measurement above 1 GHz was performed from 1 GHz to the 5th harmonic of highest fundamental frequency. Test was measured by 12 GHz.

5. FIELD STRENGTH CALCULATION

The field strength is calculated by adding the antenna factor and cable factor.
 The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 21.5 dB μ V is obtained. The antenna factor of 7.4 dB/m and a cable factor of 1.1 dB are added. The 30 dB μ V/m value is mathematically converted to its corresponding level in μ V/m.

$$FS = 21.5 + 7.4 + 1.1 = 30 \text{ dB}\mu\text{V}/\text{m}$$

[Radiated Emission Limits]

Frequency of Emission (MHz)	Field Strength	
	μ V/m	dB μ V/m
30 to 88	100	40.0
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

6. TEST EQUIPMENT

<u>Type</u>	<u>Manufacturer</u>	<u>Model Name</u>	<u>Serial Number</u>	<u>Calibration Cycle</u>	<u>Next CAL Date</u>
<u>Conducted Emission</u>					
<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESCI	100584	1 year	2013.05.02
<input type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESCI	100033	1 year	2013.06.18
<input type="checkbox"/> LISN	Rohde & Schwarz	ESH3-Z5	100282	1 year	2013.07.04
<input checked="" type="checkbox"/> LISN	EMCO	3816/2SH	9706-1070	1 year	2013.05.02
<input checked="" type="checkbox"/> LISN	Rohde & Schwarz	ENV216	100073	1 year	2014.02.06
<input type="checkbox"/> Attenuator	Rohde & Schwarz	ESH3-Z2	357.8810.352	1 year	2013.07.31
<u>Radiated Emission</u>					
<input type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESU26	100241	1 year	2013.07.30
<input type="checkbox"/> Antenna master	INNCO Systems	MA4000-EP	MA4000/283	N/A	-
<input type="checkbox"/> Turn Table	INNCO Systems	DT3000-3T	DT3000/69	N/A	-
<input checked="" type="checkbox"/> EMI Test Receiver	Rohde & Schwarz	ESI40	831564103	1 year	2013.05.03
<input checked="" type="checkbox"/> Antenna master	HD GmbH	MA240	240/520	N/A	-
<input checked="" type="checkbox"/> Turn Table	HD GmbH	2090	9702/1224	N/A	-
<input type="checkbox"/> Trilog Antenna	Schwarzbeck	VULB9160	3125	2 year	2013.05.03
<input checked="" type="checkbox"/> Trilog Antenna	Schwarzbeck	VULB9160	3301	2 year	2014.12.17
<input type="checkbox"/> Horn Antenna	Schwarzbeck	BBHA 9120D	147	2 year	2013.05.15
<input type="checkbox"/> Horn Antenna	Schwarzbeck	BBHA 9120D	937	2 year	2013.10.17
<input checked="" type="checkbox"/> Horn Antenna	Schwarzbeck	BBHA 9120D	296	2 year	2014.12.13
<input checked="" type="checkbox"/> Power Amplifier	Rohde & Schwarz	SCU-18	10094	1 year	2013.09.11

7. CONCLUSION

The data collected shows that the **EUT type: Cellular/PCS GSM/GPRS and Cellular WCDMA/HSDPA/HSUPA Phone with Bluetooth/WLAN, NFC(Felica), A-GPS, Wireless Charger, Wi-Fi Direct, Model: L-05E, FCC ID: ZNFL05E** complies with §15.107 and §15.109 of the FCC rules.