



**FCC 47 CFR Parts 1 & 2
Published RF Exposure KDB Procedures
IEEE Standard 1528-2013**

(Class II Permissive Change)

SAR EVALUATION REPORT

For
GSM / W-CDMA / LTE Phone + Bluetooth & WLAN (2.4GHz)

**Model: LGL31L, LG-L31L, L31L
FCC ID: ZNFL31L**

**Report Number: 14U17021-5
Issue Date: 4/3/2014**

Prepared for
**LG ELECTRONICS MOBILECOMM U.S.A., INC.
1000 SYLVAN AVE.
ENGLEWOOD CLIFFS, NJ 07632**

Prepared by
**UL Verification Services Inc.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	4/3/2014	Initial Issue	--

Table of Contents

1. Attestation of Test Results..... 6

2. Test Methodology 7

3. Facilities and Accreditation 7

4. Calibration and Uncertainty 8

 4.1. *Measuring Instrument Calibration 8*

 4.2. *Measurement Uncertainty..... 8*

5. Measurement System Description and Setup..... 9

6. SAR Measurement Procedure..... 10

 6.1. *Normal SAR Measurement Procedure..... 10*

 6.2. *Volume Scan Procedures 12*

7. Device Under Test..... 13

 7.1. *General Information 13*

 7.2. *Wireless Technologies..... 14*

 7.3. *RF Output Power Tolerance 15*

 7.4. *Simultaneous Transmission Condition 15*

 7.5. *General LTE SAR Test and Reporting Considerations..... 16*

8. RF Exposure Conditions 17

 8.1. *Head Exposure Condition(s)..... 17*

 8.2. *Body-worn Accessory Exposure Condition(s) 17*

 8.3. *Wi-Fi Direct Exposure Condition(s)..... 17*

9. RF Output Power Measurement..... 18

 9.1. *GSM 18*

 9.2. *W-CDMA 19*

 9.3. *LTE Band..... 23*

 9.4. *Wi-Fi (2.4 GHz Band)..... 26*

 9.5. *Bluetooth 27*

10. Tissue Dielectric Properties 28

 10.1. *Composition of Ingredients for the Tissue Material Used in the SAR Tests 29*

 10.2. *Tissue Dielectric Parameter Check Results..... 30*

11. System Performance Check 32

 11.1. *System Performance Check Measurement Conditions..... 32*

 11.2. *Reference SAR Values for System Performance Check..... 32*

11.3.	<i>System Performance Check Results</i>	33
12.	SAR Test Results	34
12.1.	<i>GSM850</i>	35
12.2.	<i>GSM1900</i>	35
12.3.	<i>W-CDMA Band V</i>	35
12.4.	<i>W-CDMA Band II</i>	35
12.5.	<i>LTE Band 4 (10 MHz Bandwidth)</i>	36
12.6.	<i>LTE Band 17 (10 MHz Bandwidth)</i>	36
12.7.	<i>Wi-Fi (DTS Band)</i>	36
12.8.	<i>Bluetooth</i>	37
12.8.1.	<i>Standalone SAR Test Exclusion Considerations</i>	37
12.8.2.	<i>Estimated SAR</i>	37
13.	SAR Measurement Variability	38
13.1.	<i>The Highest Measured SAR Configuration in Each Frequency Band</i>	38
13.2.	<i>Repeated Measurement Results</i>	38
14.	Simultaneous Transmission SAR Analysis	39
14.1.	<i>Sum of the SAR for GSM850 & Wi-Fi & BT</i>	40
14.2.	<i>Sum of the SAR for GSM1900 & Wi-Fi & BT</i>	40
14.3.	<i>Sum of the SAR for WCDMA Band V & Wi-Fi & BT</i>	40
14.4.	<i>Sum of the SAR for WCDMA Band II & Wi-Fi & BT</i>	41
14.5.	<i>Sum of the SAR for LTE Band 4 & Wi-Fi & BT</i>	41
14.6.	<i>Sum of the SAR for LTE Band 17 & Wi-Fi & BT</i>	41
15.	Appendixes	42
15.1.	<i>Photos and Antenna Locations</i>	42
15.2.	<i>System Performance Check Plots</i>	42
15.3.	<i>Highest SAR Test Plots</i>	42
15.4.	<i>Calibration Certificate for E-Field Probe EX3DV4 - SN 3929</i>	42
15.5.	<i>Calibration Certificate for E-Field Probe EX3DV4 - SN 3902</i>	42
15.6.	<i>Calibration Certificate for E-Field Probe EX3DV3 - SN 3936</i>	42
15.7.	<i>Calibration Certificate for E-Field Probe EX3DV4 - SN 3885</i>	42
15.8.	<i>Calibration Certificate for D750V3 - SN 1024</i>	42
15.9.	<i>Calibration Certificate for D835V2 - SN 4d142</i>	42
15.10.	<i>Calibration Certificate for D1750V2 - SN 1077</i>	42
15.11.	<i>Calibration Certificate for D1900V2- SN 5d163</i>	42
15.12.	<i>Calibration Certificate for D2450V2 - SN 706</i>	42

1. Attestation of Test Results


Applicant	LG ELECTRONICS MOBILECOMM U.S.A., INC.			
DUT description	GSM / W-CDMA / LTE Phone + Bluetooth & WLAN (2.4GHz)			
Model	LGL31L, LG-L31L, L31L			
Test device is	An identical prototype			
Device category	Portable			
Exposure category	General Population/Uncontrolled Exposure			
Date tested	03/24/2014 – 03/27/2014			
The highest reported SAR values	RF exposure condition	Licensed	DTS	UNII
	Head	0.470 W/kg	0.284 W/kg	N/A
	Body-worn Accessory	0.765 W/kg	0.124 W/kg	N/A
	Wi-Fi Direct	N/A	0.124 W/kg	N/A
	Simultaneous Transmission	0.889 W/kg		N/A
Applicable Standards	FCC 47 CFR Parts 1 & 2 Published RF Exposure KDB Procedures, and TCB workshop updates IEEE Standard 1528-2013			
Test Results	Pass			

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.

Approved & Released By:

Prepared By:

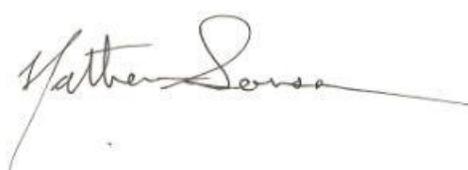Devin Chang
 WiSE Senior Engineer
 UL Verification Services Inc.

Nathan Sousa
 WiSE Laboratory Engineer
 UL Verification Services Inc.

2. Test Methodology

The tests documented in this report were performed in accordance with FCC 47 CFR Parts 1 & 2, IEEE STD 1528-2013, the following FCC Published RF exposure KDB procedures, and TCB workshop updates:

- 447498 D01 General RF Exposure Guidance v05r02
- 648474 D04 Handset SAR v01r02
- 941225 D01 SAR test for 3G devices v02
- 941225 D02 HSPA and 1x Advanced v02r02
- 941225 D03 SAR Test Reduction GSM GPRS EDGE v01
- 941225 D04 SAR for GSM E GPRS Dual Xfer Mode v01
- 941225 D05 SAR for LTE Devices v02r03
- 248227 D01 SAR Meas for 802 11abg v01r02
- 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03
- 865664 D02 SAR Reporting v01r01
- 690783 D01 SAR Listings on Grants v01r03

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

47173 Benicia Street	47266 Benicia Street
SAR Lab A	SAR Lab 1
SAR Lab B	SAR Lab 2
SAR Lab C	SAR Lab 3
SAR Lab D	SAR Lab 4
SAR Lab E	
SAR Lab F	

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. Calibration and Uncertainty

4.1. Measuring Instrument Calibration

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Tissue Dielectric Properties

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
PNA Network Analyzer	Agilent	E8363C	MY49030443	12/3/2014
Dielectronic Probe kit	SPEAG	DAK-3.5	1082	9/10/2014
Dielectronic Probe kit	SPEAG	DAK-3.5 Short	SM DAK 200 BA	N/A
Thermometer	Control Company	4242	122529162	9/19/2014

System Performance Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Synthesized Signal Generator	Agilent	8665B	3438A00633	6/13/2014
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1808939	N/A
Directional coupler	Werlatone	C8060-102	2710	N/A
DC Power Supply	Sorensen Ametek	XT15-4	1319A02778	N/A
Power Meter	HP	438A	2822A05684	10/10/2014
Power Sensor	Agilent	8481A	2237A31744	10/2/2014
Power Sensor	Agilent	8481A	2349A36506	9/30/2014
Synthesized Signal Generator	HP	8665B	5744A01084	5/7/2014
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1795093	N/A
Bidirectional coupler	Werlatone	C8060-102	2711	N/A
DC Power Supply	Sorensen Ametek	XT20-3	1318A00529	N/A
Power Meter	Agilent	N1912A (P-Series)	MY50001018	8/23/2014
Power Sensor	Agilent	E9323A	MY53070009	4/3/2014
Power Sensor	Agilent	E9323A	US40411556	8/9/2014
Thermometer	TRACEABLE	4242	122529162	9/19/2014
Data Acquisition Electronics	SPEAG	DAE3	427	1/21/2015
Data Acquisition Electronics	SPEAG	DAE4	1377	7/15/2014
Data Acquisition Electronics	SPEAG	DAE4	1380	7/15/2014
Data Acquisition Electronics	SPEAG	DAE4	1343	7/24/2014
E-Field Probe	SPEAG	EX3DV4	3929	6/24/2014
E-Field Probe	SPEAG	EX3DV4	3902	7/12/2014
E-Field Probe	SPEAG	EX3DV4	3936	7/22/2014
E-Field Probe	SPEAG	EX3DV4	3885	9/18/2014
System Validation Dipole	SPEAG	D750V3	1024	5/28/2014
System Validation Dipole	SPEAG	D835V2	4d142	9/17/2014
System Validation Dipole	SPEAG	D1750V2	1077	9/12/2014
System Validation Dipole	SPEAG	D1900V2	5d163	9/17/2014
System Validation Dipole	SPEAG	D2450V2	706	5/29/2014

Others


Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Base Station Simulator	R & S	CMU200	117455	5/20/2014
Base Station Simulator	R & S	CMU200	118715	5/20/2014
Base Station Simulator	R & S	CMW500	103764-dn	8/16/2014
Base Station Simulator	R & S	CMW500	103766-ly	8/19/2014
Base Station Simulator	R & S	CMW500	107513-be	7/26/2014

4.2. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

5. Measurement System Description and Setup

The DASY5 system used for performing compliance tests consists of the following items:

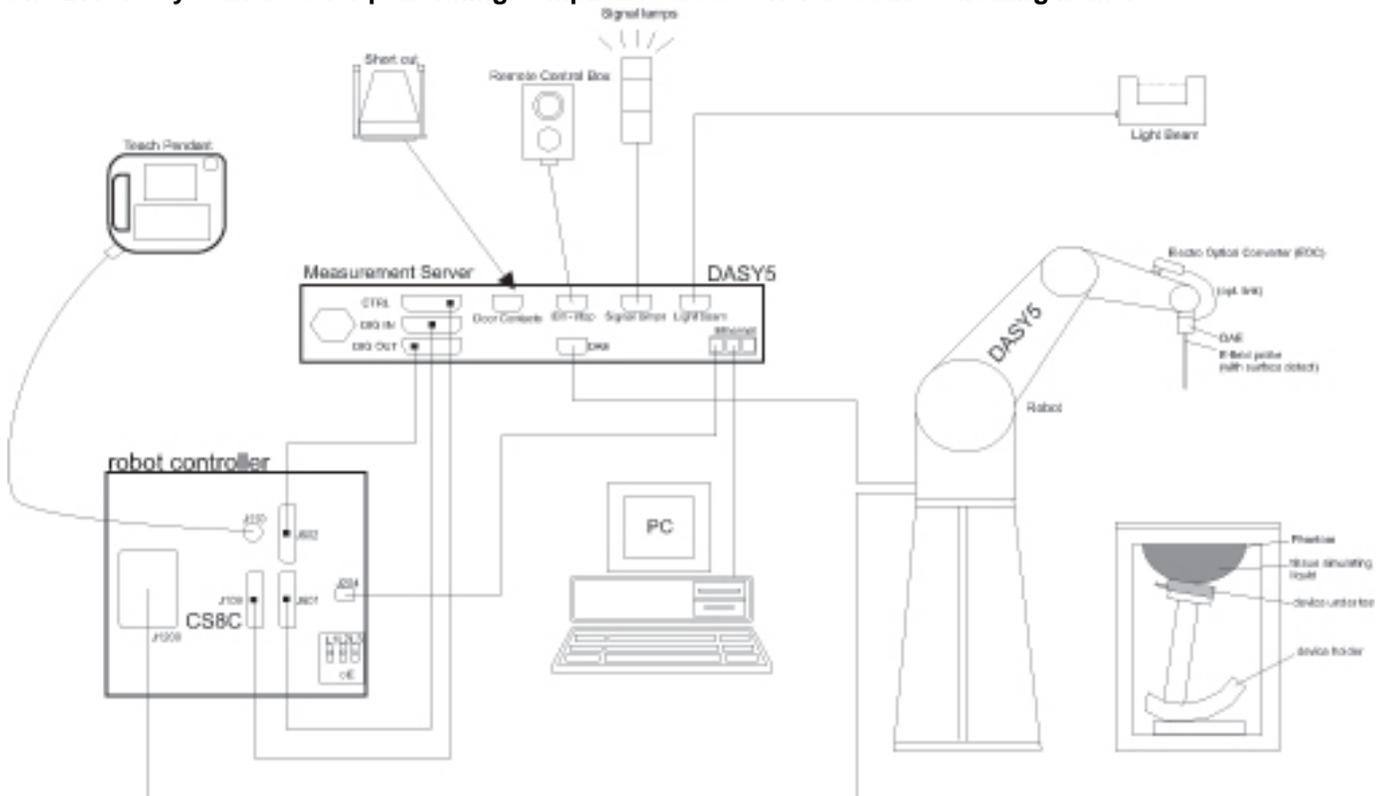

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

6. SAR Measurement Procedure

6.1. Normal SAR Measurement Procedure

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

		≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm *	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the area scan based <i>1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

6.2. Volume Scan Procedures

Step 1: Repeat Step 1-4 in Section 6.1

Step 2: Volume Scan

Volume Scans are used to assess peak SAR and averaged SAR measurements in largely extended 3-dimensional volumes within any phantom. This measurement does not need any previous area scan. The grid can be anchored to a user specific point or to the current probe location.

Step 3: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

7. Device Under Test

7.1. General Information

Operating Configuration(s)	Held to head, Body-worn (Voice call)
Mobile Hotspot	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi -enabled devices. <input type="checkbox"/> Mobile Hotspot (Wi-Fi 2.4 GHz) <input type="checkbox"/> Mobile Hotspot (Wi-Fi 5 GHz)
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other <input checked="" type="checkbox"/> Wi-Fi Direct (Wi-Fi 2.4 GHz) <input type="checkbox"/> Wi-Fi Direct (Wi-Fi 5 GHz)
Device dimension	Overall (Length x Width): 127.5 mm x 66.1mm Overall Diagonal: 135.2mm Display Diagonal: 114mm
Back Cover	<input checked="" type="checkbox"/> Normal Battery Cover <input type="checkbox"/> Wireless Charger Battery Cover <input type="checkbox"/> Normal Battery Cover with NFC
Accessory	<input checked="" type="checkbox"/> Headset
Battery Options	<input checked="" type="checkbox"/> Standard – Lithium-ion battery, Rating 3.8 Vdc, 2440 mAh <input type="checkbox"/> Extended (large capacity)

7.2. Wireless Technologies

Wireless Technology and Frequency Bands	GSM: 850 / 1900 W-CDMA Band: V / II LTE Band: 4 / 17 (FDD) Wi-Fi: 2.4 GHz Bluetooth: 2.4 GHz
Mode	GSM - <input checked="" type="checkbox"/> Voice (GMSK) - <input checked="" type="checkbox"/> GPRS (GMSK) - <input checked="" type="checkbox"/> EGPRS (8PSK) W-CDMA - <input checked="" type="checkbox"/> UMTS Rel. 99 - <input checked="" type="checkbox"/> HSDPA (Rel. 5) - <input checked="" type="checkbox"/> HSUPA (Rel. 6) - <input type="checkbox"/> DC-HSDPA (Rel. 8) LTE: QPSK, 16QAM Wi-Fi 2.4GHz (802.11b/g/n) - <input checked="" type="checkbox"/> 802.11b - <input checked="" type="checkbox"/> 802.11g - <input checked="" type="checkbox"/> 802.11n (20MHz) Bluetooth Ver. 4.0 (LE)
Duty Cycle	GSM Voice: 12.5%; GPRS 1 Slot: 12.5%, 2 Slots: 25% W-CDMA: 100% LTE (FDD): 100% Wi-Fi 802.11b/g/n: 100%)
GPRS Multi-Slot Class	<input type="checkbox"/> Class 8 - One Up <input checked="" type="checkbox"/> Class 10 - Two Up <input type="checkbox"/> Class 12 - Four Up <input type="checkbox"/> Class 33 - Four Up
DTM (Dual Transfer Mode)	<input type="checkbox"/> Supported
VoIP (GPRS)	<input checked="" type="checkbox"/> Supported
SV-LTE & SV-DO	<input type="checkbox"/> Supported

7.3. RF Output Power Tolerance

Upper limit (dB): 0.5		RF Output Power (dBm)	
RF Air interface	Mode	Target	Max. tune-up tolerance limit
GSM850	Voice	33.2	33.7
	GPRS 1 slot	33.2	33.7
	GPRS 2 slots	31.2	31.7
	EGPRS 1 slot	27.2	27.7
	EGPRS 2 slots	27.2	27.7
GSM1900	Voice	30.2	30.7
	GPRS 1 slot	30.2	30.7
	GPRS 2 slots	28.2	28.7
	EGPRS 1 slot	26.2	26.7
	EGPRS 2 slots	26.2	26.7
W-CDMA Band V	R99	23.2	23.7
	HSDPA	23.2	23.7
	HSUPA	23.2	23.7
W-CDMA Band II	R99	23.2	23.7
	HSDPA	23.2	23.7
	HSUPA	23.2	23.7
LTE Band 4	QPSK	23.7	24.2
LTE Band 17	QPSK	23.7	24.2

Upper limit (dB): 1.0		RF Output Power (dBm)	
RF Air interface	Mode	Target	Max. tune-up tolerance limit
WiFi 2.4 GHz	802.11b	15.7	16.7
	802.11g	12.0	13.0
	802.11n HT20	12.0	13.0

Upper limit (dB): 1.5		RF Output Power (dBm)	
RF Air interface	Mode	Target	Max. tune-up tolerance limit
Bluetooth		9.4	10.9
Bluetooth LE		0.5	2.0

7.4. Simultaneous Transmission Condition

RF Exposure Condition	Capable Transmit Configurations
Head	<ol style="list-style-type: none"> GSM 850/1900 Voice + Wi-Fi 2.4 GHz GSM 850/1900 (GPRS/EDGE) + Wi-Fi 2.4 GHz (VoIP) W-CDMA Band V / II+ Wi-Fi 2.4 GHz LTE Band 4 / 17 + Wi-Fi 2.4GHz
Body-worn Accessory	<ol style="list-style-type: none"> GSM 850/1900 Voice + Wi-Fi 2.4 GHz GSM 850/1900 Voice + BT GSM 850/1900 (GPRS/EDGE) + Wi-Fi 2.4 GHz (VoIP) GSM 850/1900 (GPRS/EDGE) + BT (VoIP) W-CDMA Band V / II + Wi-Fi 2.4 GHz W-CDMA Band V / II + BT LTE Band 4 / 17 + Wi-Fi 2.4GHz LTE Band 4 / 17 + BT
Wireless Router (Hotspot) & Wi-Fi Direct	N/A
Notes:	
<ol style="list-style-type: none"> Wi-Fi 2.4GHz and Bluetooth cannot transmit simultaneously. Wi-Fi 2.4GHz also supports Wi-Fi Direct. 	

7.5. General LTE SAR Test and Reporting Considerations

Item	Description																																						
Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 4	Frequency range: 1710 - 1755 MHz																																					
		Channel Bandwidth																																					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																
	Low			20000/1715	19975/1712.5																																		
	Mid			20175/1732.5	20175/1732.5																																		
	High			20350/1750	20375/1752.5																																		
	Band 17	Frequency range: 704 - 716 MHz																																					
		Channel Bandwidth																																					
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																
	Low			20000/1715	23755/706.5																																		
	Mid			23790/710	23790/710																																		
	High			20350/1750	23825/713.5																																		
LTE transmitter and antenna implementation	LTE has two Tx/Rx antennas and two Rx only antennas. Refer to Appendix "Antenna Locations and Separation Distances" for antenna locations																																						
Maximum power reduction (MPR)	<p align="center">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> </tbody> </table> <p>MPR Built-in by design A-MPR (additional MPR) was disabled during SAR testing</p>	Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																
Power reduction	No																																						
Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																						

8. RF Exposure Conditions

Refer to Appendix “Antenna Locations and Separation Distances” for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

8.1. Head Exposure Condition(s)

For WWAN, LTE and Wi-Fi

Test Configurations	SAR Required	Note
Left Touch	Yes	
Left Tilt (15°)	Yes	
Right Touch	Yes	
Right Tilt (15°)	Yes	

8.2. Body-worn Accessory Exposure Condition(s)

For GSM, W-CDMA and LTE B4 (①)

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	<25 mm	Yes	
Front	<25 mm	Yes	

For LTE B17 (②)

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	<25 mm	Yes	
Front	<25 mm	Yes	

For Wi-Fi and Bluetooth (③)

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	<25 mm	Yes	
Front	<25 mm	Yes	

8.3. Wi-Fi Direct Exposure Condition(s)

For Wi-Fi (④)

Test Configurations	Antenna-to-edge/surface	SAR Required	Note
Rear	<25 mm	Yes	
Front	<25 mm	Yes	
Edge 1 (Top)	3 mm	Yes	
Edge 2 (Right)	54.1 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 648474 D04 Handset SAR v01r01
Edge 3 (Bottom)	104.5 mm	No	SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 648474 D04 Handset SAR v01r01
Edge 4 (Left)	2 mm	Yes	

9. RF Output Power Measurement

9.1. GSM

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst Pwr (dBm)	Frame Pwr (dBm)
850	GSM (Voice)	CS1	1	128	824.2	33.7	24.7
				190	836.6	33.7	24.7
				251	848.8	33.6	24.6
	GPRS (GMSK)	CS1	1	128	824.2	33.7	24.7
				190	836.6	33.7	24.7
				251	848.8	33.6	24.6
			2	128	824.2	31.2	25.2
				190	836.6	31.1	25.1
				251	848.8	30.9	24.9
	EGPRS (8PSK)	MCS5	1	128	824.2	27.5	18.5
				190	836.6	27.4	18.4
				251	848.8	27.4	18.4
2			128	824.2	26.6	20.6	
			190	836.6	26.5	20.5	
			251	848.8	26.5	20.5	

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head & Body-worn Accessory: GMSK Voice Mode
- VoIP mode: GMSK (GPRS) mode with 2 time slots, based on the output power measurements above
- SAR is not required for EGPRS (8PSK) mode because its output power is less than that of GPRS Mode

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst Pwr (dBm)	Frame Pwr (dBm)
1900	GSM (Voice)	CS1	1	512	1850.2	30.5	21.5
				661	1880.0	30.7	21.7
				810	1909.8	30.7	21.7
	GPRS (GMSK)	CS1	1	512	1850.2	30.5	21.5
				661	1880.0	30.7	21.7
				810	1909.8	30.7	21.7
			2	512	1850.2	28.4	22.4
				661	1880.0	28.6	22.6
				810	1909.8	28.7	22.7
	EGPRS (8PSK)	MCS5	1	512	1850.2	25.6	16.6
				661	1880.0	25.7	16.7
				810	1909.8	25.7	16.7
			2	512	1850.2	24.5	18.5
				661	1880.0	24.5	18.5
				810	1909.8	24.5	18.5

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head & Body-worn Accessory: GMSK Voice Mode
- VoIP mode: GMSK (GPRS) mode with 2 time slots, based on the output power measurements above
- SAR is not required for EGPRS (8PSK) mode because its output power is less than that of GPRS Mode

9.2. W-CDMA

Release 99

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

Measured Results

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)
W-CDMA Band V	Rel 99 (RMC, 12.2 kbps)	4132	826.4	23.7
		4183	836.6	23.7
		4233	846.6	23.6
W-CDMA Band II	Rel 99 (RMC, 12.2 kbps)	9262	1852.4	23.7
		9400	1880.0	23.7
		9538	1907.6	23.5

HSDPA

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121-1. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
MPR (dB)	0	0	0.5	0.5	
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
Ahs= β_{hs}/β_c	30/15				

Measured Results

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)
W-CDMA Band V	Subtest 1	4132	826.4	23.5
		4183	836.6	23.6
		4233	846.6	23.5
	Subtest 2	4132	826.4	23.6
		4183	836.6	23.6
		4233	846.6	23.6
	Subtest 3	4132	826.4	23.1
		4183	836.6	23.1
		4233	846.6	23.1
	Subtest 4	4132	826.4	23.2
		4183	836.6	23.1
		4233	846.6	23.1
W-CDMA Band II	Subtest 1	9262	1852.4	23.6
		9400	1880.0	23.7
		9538	1907.6	23.5
	Subtest 2	9262	1852.4	23.7
		9400	1880.0	23.7
		9538	1907.6	23.7
	Subtest 3	9262	1852.4	23.1
		9400	1880.0	23.2
		9538	1907.6	23.1
	Subtest 4	9262	1852.4	23.2
		9400	1880.0	23.2
		9538	1907.6	23.1

Maximum output power levels that are possible for all subtests reported.

HSPA (HSDPA & HSUPA)

The following 5 Sub-tests were completed according to Release 7 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSPA				
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	11/15	15/9	2/15	15/0
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	β_{ed}	1309/225	94/75	47/15 47/15	56/75	47/15
	CM (dB)	1	3	2	3	1
MPR (dB)	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				0
	DNAK	8				0
	DCQI	8				0
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	A _{hs} = β_{hs}/β_c	30/15				
HSUPA Specific Settings	E-DPDCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
Reference E-TFCI PO	27	27	27	27	27	
Maximum Channelisation Codes	2xSF2				SF4	

Measured Results

Band	Mode	UL Ch No.	Freq. (MHz)	Avg Pwr (dBm)
W-CDMA Band V	Subtest 1	4132	826.4	23.5
		4183	836.6	23.1
		4233	846.6	23.5
	Subtest 2	4132	826.4	21.3
		4183	836.6	21.9
		4233	846.6	22.0
	Subtest 3	4132	826.4	22.3
		4183	836.6	22.6
		4233	846.6	22.4
	Subtest 4	4132	826.4	22.3
		4183	836.6	22.4
		4233	846.6	22.2
	Subtest 5	4132	826.4	23.7
		4183	836.6	23.7
		4233	846.6	23.7
W-CDMA Band II	Subtest 1	9262	1852.4	23.1
		9400	1880.0	23.2
		9538	1907.6	23.2
	Subtest 2	9262	1852.4	22.3
		9400	1880.0	22.3
		9538	1907.6	21.7
	Subtest 3	9262	1852.4	22.4
		9400	1880.0	22.6
		9538	1907.6	22.5
	Subtest 4	9262	1852.4	22.1
		9400	1880.0	22.4
		9538	1907.6	22.1
	Subtest 5	9262	1852.4	23.7
		9400	1880.0	23.6
		9538	1907.6	23.6

9.3. LTE Band

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signalling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10,15,20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

LTE Band 4 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1715 MHz	1732.5 MHz	1750 MHz
LTE Band 4	10	QPSK	1	0	0	0	24.1	24.1	24.2
			1	25	0	0	24.0	24.0	24.1
			1	49	0	0	24.1	24.1	24.2
			25	0	1	1	23.0	22.9	22.8
			25	12	1	1	23.0	22.9	22.9
			25	25	1	1	23.0	22.9	22.9
			50	0	1	1	22.9	23.0	22.8
		16QAM	1	0	1	1	23.1	23.2	23.1
			1	25	1	1	23.1	23.1	23.0
			1	49	1	1	23.1	23.1	23.1
			25	0	2	2	21.9	21.9	21.8
			25	12	2	2	21.8	22.0	21.8
			25	25	2	2	21.8	22.0	21.8
			50	0	2	2	21.8	21.9	21.8
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)		
							1712.5 MHz	1732.5 MHz	1752.5 MHz
LTE Band 4	5	QPSK	1	0	0	0	24.2	24.1	24.1
			1	12	0	0	24.2	24.1	24.2
			1	24	0	0	24.1	24.1	24.2
			12	0	1	1	23.2	23.1	23.1
			12	6	1	1	23.2	23.1	23.2
			12	11	1	1	23.2	23.1	23.1
			25	0	1	1	23.2	23.1	23.1
		16QAM	1	0	1	1	23.2	23.1	23.1
			1	12	1	1	23.1	23.1	23.1
			1	24	1	1	23.2	23.2	23.1
			12	0	2	2	21.9	22.0	22.0
			12	6	2	2	22.0	22.0	22.1
			12	11	2	2	22.1	22.1	22.0
			25	0	2	2	22.0	22.0	22.1

LTE Band 17 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)
							710 MHz
LTE Band 17	10	QPSK	1	0	0	0	24.0
			1	25	0	0	24.2
			1	49	0	0	24.2
			25	0	1	1	22.8
			25	12	1	1	23.0
			25	25	1	1	23.0
		16QAM	50	0	1	1	23.1
			1	0	1	1	22.9
			1	25	1	1	23.1
			1	49	1	1	23.1
			25	0	2	2	21.8
			25	12	2	2	21.9
			25	25	2	2	22.1
			50	0	2	2	22.0
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Meas. MPR	Avg Pwr (dBm)
							710 MHz
LTE Band 17	5	QPSK	1	0	0	0	23.9
			1	12	0	0	24.1
			1	24	0	0	24.1
			12	0	1	1	23.0
			12	6	1	1	23.2
			12	11	1	1	23.0
		16QAM	25	0	1	1	23.0
			1	0	1	1	22.8
			1	12	1	1	23.0
			1	24	1	1	23.1
			12	0	2	2	21.9
			12	6	2	2	22.1
			12	11	2	2	22.0
			25	0	2	2	22.0

9.4. Wi-Fi (2.4 GHz Band)

Required Test Channels per KDB 248227 D01

Mode	Band	GHz	Channel	"Default Test Channels"	
				802.11b	802.11g
802.11b/g	2.4 GHz	2.412	1 [#]	√	∇
		2.437	6	√	∇
		2.462	11 [#]	√	∇

Notes:

√ = "default test channels"

∇ = possible 802.11g channels with maximum average output ¼ dB ≥ the "default test channels"

[#] = when output power is reduced for channel 1 and /or 11 to meet restricted band requirements the highest output channels closest to each of these channels should be tested.

Measured Results

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Avg Pwr (dBm)	SAR Test (Yes/No)
2.4 (DTS)	802.11b	1 Mbps	1	2412	15.9	Yes
			6	2437	15.2	
			11	2462	14.8	
	802.11g	6 Mbps	1	2412	13.0	No
			6	2437	12.6	
			11	2462	12.3	
	802.11n (HT20)	MCS0	1	2412	12.7	No
			6	2437	12.6	
			11	2462	12.4	

Note(s):

Per KDB 248227 D01, SAR is not required for 802.11g/HT20 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11b channels.

Power measurements to determine worst-case data rates

Mode	Ch #	Freq. (MHz)	Data Rate	Avg Pwr (dBm)	SAR test (Yes/No)
802.11b	6	2437	1 Mbps	15.9	Yes
			2 Mbps	15.8	No
			5.5 Mbps	15.8	No
			11 Mbps	15.8	No

9.5. Bluetooth

Maximum tune-up tolerance limit is 10.9 dBm from the rated nominal maximum output power. This power level qualifies for exclusion of SAR testing.

Refer to Standalone SAR Test Exclusion Considerations Section.

10. Tissue Dielectric Properties

IEEE Standard 1528-2013

Target Frequency (MHz)	Head	
	ϵ_r	σ (S/m)
300	45.3	0.87
450	43.5	0.87
750	41.9	0.89
835	41.5	0.90
900	41.5	0.97
1450	40.5	1.20
1500	40.4	1.23
1640	40.2	1.31
1750	40.1	1.37
1800	40.0	1.40
1900	40.0	1.40
2000	40.0	1.40
2100	39.8	1.49
2300	39.5	1.67
2450	39.2	1.80
2600	39.0	1.96
3000	38.5	2.40
3500	37.9	2.91
4000	37.4	3.43
4500	36.8	3.94
5000	36.2	4.45
5200	36.0	4.66
5400	35.8	4.86
5600	35.5	5.07
5800	35.3	5.27
6000	35.1	5.48

NOTE—For convenience, permittivity and conductivity values at some frequencies that are not part of the original data from Drossos et al. [B60] or the extension to 5800 MHz are provided (i.e., the values shown in italics). These values were linearly interpolated between the values in this table that are immediately above and below these values, except the values at 6000 MHz that were linearly extrapolated from the values at 3000 MHz and 5800 MHz.

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

10.2. Tissue Dielectric Parameter Check Results

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within ± 2°C of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

SAR Lab 1

Freq. (MHz)		Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
3/24/2014	Body 1900	e'	51.7800	Relative Permittivity (ϵ_r):	51.78	53.30	-2.85	5
		e"	14.5100	Conductivity (σ):	1.53	1.52	0.85	5
	Body 1850	e'	51.8600	Relative Permittivity (ϵ_r):	51.86	53.30	-2.70	5
		e"	14.2900	Conductivity (σ):	1.47	1.52	-3.29	5
	Body 1910	e'	51.7300	Relative Permittivity (ϵ_r):	51.73	53.30	-2.95	5
		e"	14.5500	Conductivity (σ):	1.55	1.52	1.66	5
3/25/2014	Head 1900	e'	39.1800	Relative Permittivity (ϵ_r):	39.18	40.00	-2.05	5
		e"	13.3700	Conductivity (σ):	1.41	1.40	0.89	5
	Head 1850	e'	39.3900	Relative Permittivity (ϵ_r):	39.39	40.00	-1.53	5
		e"	13.2200	Conductivity (σ):	1.36	1.40	-2.87	5
	Head 1910	e'	39.1500	Relative Permittivity (ϵ_r):	39.15	40.00	-2.13	5
		e"	13.3900	Conductivity (σ):	1.42	1.40	1.57	5
3/24/2014	Body 835	e'	52.9500	Relative Permittivity (ϵ_r):	52.95	55.20	-4.08	5
		e"	21.4900	Conductivity (σ):	1.00	0.97	2.86	5
	Body 820	e'	53.0900	Relative Permittivity (ϵ_r):	53.09	55.28	-3.96	5
		e"	21.5600	Conductivity (σ):	0.98	0.97	1.50	5
	Body 850	e'	52.8100	Relative Permittivity (ϵ_r):	52.81	55.16	-4.26	5
		e"	21.4200	Conductivity (σ):	1.01	0.99	2.56	5

SAR Lab 3

Freq. (MHz)		Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
3/24/2014	Body 2450	e'	50.8000	Relative Permittivity (ϵ_r):	50.80	52.70	-3.61	5
		e"	14.5800	Conductivity (σ):	1.99	1.95	1.86	5
	Body 2410	e'	50.9600	Relative Permittivity (ϵ_r):	50.96	52.76	-3.41	5
		e"	14.4000	Conductivity (σ):	1.93	1.91	1.16	5
	Body 2475	e'	50.7000	Relative Permittivity (ϵ_r):	50.70	52.67	-3.74	5
		e"	14.6900	Conductivity (σ):	2.02	1.99	1.84	5
3/24/2014	Head 2450	e'	37.6000	Relative Permittivity (ϵ_r):	37.60	39.20	-4.08	5
		e"	13.8300	Conductivity (σ):	1.88	1.80	4.67	5
	Head 2410	e'	37.8100	Relative Permittivity (ϵ_r):	37.81	39.28	-3.74	5
		e"	13.7300	Conductivity (σ):	1.84	1.76	4.51	5
	Head 2475	e'	37.5000	Relative Permittivity (ϵ_r):	37.50	39.17	-4.26	5
		e"	13.9000	Conductivity (σ):	1.91	1.83	4.70	5

SAR Lab 4

	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
3/26/2014	Head 835	e'	40.6100	Relative Permittivity (ϵ_r):	40.61	41.50	-2.14	5
		e"	19.4800	Conductivity (σ):	0.90	0.90	0.49	5
	Head 820	e'	40.7700	Relative Permittivity (ϵ_r):	40.77	41.60	-2.00	5
		e"	19.5200	Conductivity (σ):	0.89	0.90	-0.94	5
	Head 850	e'	40.4300	Relative Permittivity (ϵ_r):	40.43	41.50	-2.58	5
		e"	19.4300	Conductivity (σ):	0.92	0.92	0.36	5
3/27/2014	Head 1750	e'	39.2700	Relative Permittivity (ϵ_r):	39.27	40.08	-2.03	5
		e"	13.8100	Conductivity (σ):	1.34	1.37	-1.84	5
	Head 1710	e'	39.2700	Relative Permittivity (ϵ_r):	39.27	40.15	-2.18	5
		e"	13.7100	Conductivity (σ):	1.30	1.35	-3.18	5
	Head 1755	e'	39.2800	Relative Permittivity (ϵ_r):	39.28	40.08	-1.99	5
		e"	13.8200	Conductivity (σ):	1.35	1.37	-1.69	5
3/27/2014	Head 750	e'	40.4900	Relative Permittivity (ϵ_r):	40.49	41.96	-3.51	5
		e"	21.4500	Conductivity (σ):	0.89	0.89	0.16	5
	Head 700	e'	41.2200	Relative Permittivity (ϵ_r):	41.22	42.22	-2.36	5
		e"	21.8400	Conductivity (σ):	0.85	0.89	-4.40	5
	Head 790	e'	39.9800	Relative Permittivity (ϵ_r):	39.98	41.76	-4.25	5
		e"	21.1900	Conductivity (σ):	0.93	0.90	3.87	5

11. System Performance Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are remeasured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

11.1. System Performance Check Measurement Conditions

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ±0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm ± 0.5 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm ± 0.5 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
 For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
 For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

11.2. Reference SAR Values for System Performance Check

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (mW/g)		
				1g/10g	Head	Body
D750V3	1024	5/28/2013	750	1g	8.52	8.71
				10g	5.58	5.71
D835V2	4d142	9/17/2013	835	1g	9.44	9.36
				10g	6.12	6.20
D1750V2	1077	9/12/2013	1750	1g	37.6	37.7
				10g	20.0	20.3
D1900V2	5d163	9/17/2013	1900	1g	40.9	40.1
				10g	21.2	21.2
D2450V2	706	5/29/2013	2450	1g	53.7	49.9
				10g	25.0	23.3

11.3. System Performance Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

SAR Lab 1

Date Tested	System Dipole		T.S. Liquid	Measured Results			Target (Ref. Value)	Delta ±10 %	Est./Zoom Ratio	Plot No.	
	Type	Serial #		Area Scan	Zoom Scan	Normalize to 1 W					
3/24/2014	D1900V2	5d163	Body	1g	4.30	4.28	42.80	40.10	6.73	0.47	1, 2
				10g	2.17	2.25	22.50	21.20	6.13		
3/25/2014	D1900V2	5d163	Head	1g	4.22	4.08	40.80	40.90	-0.24	3.32	
				10g	2.15	2.11	21.10	21.20	-0.47		
3/25/2014	D835V2	4d142	Body	1g	1.00	0.97	9.67	9.36	3.31	3.30	3, 4
				10g	0.67	0.64	6.36	6.20	2.58		

SAR Lab 3

Date Tested	System Dipole		T.S. Liquid	Measured Results			Target (Ref. Value)	Delta ±10 %	Est./Zoom Ratio	Plot No.	
	Type	Serial #		Area Scan	Zoom Scan	Normalize to 1 W					
3/24/2014	D2450V2	706	Body	1g	5.33	5.32	53.20	49.90	6.61	0.19	5, 6
				10g	2.31	2.46	24.60	23.30	5.58		
3/24/2014	D2450V2	706	Head	1g	5.24	5.21	52.10	53.70	-2.98	0.57	
				10g	2.29	2.38	23.80	25.00	-4.80		

SAR Lab 4

Date Tested	System Dipole		T.S. Liquid	Measured Results			Target (Ref. Value)	Delta ±10 %	Est./Zoom Ratio	Plot No.	
	Type	Serial #		Area Scan	Zoom Scan	Normalize to 1 W					
3/26/2014	D835V2	4d142	Head	1g	0.98	0.95	9.47	9.44	0.32	3.17	7, 8
				10g	0.66	0.62	6.20	6.12	1.31		
3/27/2014	D1750V2	1077	Head	1g	3.64	3.51	35.10	37.60	-6.65	3.57	9, 10
				10g	1.93	1.86	18.60	20.00	-7.00		
3/27/2014	D750V2	1024	Head	1g	0.84	0.81	8.06	8.50	-5.18	3.70	11, 12
				10g	0.57	0.53	5.26	5.60	-6.07		

SAR Lab F

Date Tested	System Dipole		T.S. Liquid	Measured Results			Target (Ref. Value)	Delta ±10 %	Est./Zoom Ratio	Plot No.	
	Type	Serial #		Area Scan	Zoom Scan	Normalize to 1 W					
3/24/2014	D1750V2	1077	Body	1g	3.87	3.78	37.80	37.70	0.27	2.33	12, 13
				10g	2.01	2.03	20.30	20.30	0.00		
3/24/2014	D750V3	1024	Body	1g	0.88	0.87	8.66	8.71	-0.57		14, 15
				10g	0.60	0.58	5.76	5.71	0.88		

12. SAR Test Results

SAR Test Reduction criteria are as follows:

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

KDB 941225 D01 SAR test for 3G devices:

Body SAR is also measured for HSPA when the maximum average output of each RF channel with HSPA active is at least $\frac{1}{4}$ dB higher than that measured without HSPA using 12.2 kbps RMC or the maximum SAR for 12.2 kbps RMC is above 75% of the SAR limit. Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 with power control algorithm 2.

KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
- Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

12.1. GSM850

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Voice	0	Left Touch	190	836.6	33.7	33.7	0.323	0.323	1
		0	Left Tilt	190	836.6	33.7	33.7	0.147	0.147	
		0	Right Touch	190	836.6	33.7	33.7	0.251	0.251	
		0	Rightt Tilt	190	836.6	33.7	33.7	0.137	0.137	
Head VoIP	GPRS 2 Slots	0	Left Touch	190	836.6	31.7	31.1	0.356	0.409	2
		0	Left Tilt	190	836.6	31.7	31.1	0.172	0.197	
		0	Right Touch	190	836.6	31.7	31.1	0.280	0.321	
		0	Righttt Tilt	190	836.6	31.7	31.1	0.154	0.177	
Body-worn	Voice	15	Rear	190	836.6	31.2	31.1	0.331	0.339	3
		15	Front	190	836.6	31.2	31.1	0.230	0.235	
Body-worn(VoIP)	GPRS 2 Slots	15	Rear	190	836.6	31.2	31.1	0.389	0.398	4
		15	Front	190	836.6	31.2	31.1	0.255	0.261	

12.2. GSM1900

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Voice	0	Left Touch	661	1880.0	30.7	30.7	0.158	0.158	5
		0	Left Tilt	661	1880.0	30.7	30.7	0.067	0.067	
		0	Right Touch	661	1880.0	30.7	30.7	0.116	0.116	
		0	Righttt Tilt	661	1880.0	30.7	30.7	0.057	0.057	
Head VoIP	GPRS 2 Slots	0	Left Touch	661	1880.0	28.7	28.6	0.191	0.195	6
		0	Left Tilt	661	1880.0	28.7	28.6	0.065	0.067	
		0	Right Touch	661	1880.0	28.7	28.6	0.116	0.119	
		0	Righttt Tilt	661	1880.0	28.7	28.6	0.057	0.058	
Body-worn	Voice	15	Rear	661	1880.0	30.7	30.7	0.192	0.192	7
		15	Front	661	1880.0	30.7	30.7	0.120	0.120	
Body-worn(VoIP)	GPRS 2 Slots	15	Rear	661	1880.0	28.7	28.6	0.206	0.211	8
		15	Front	661	1880.0	28.7	28.6	0.130	0.133	

12.3. W-CDMA Band V

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	4183	836.6	23.7	23.7	0.337	0.337	9
		0	Left Tilt	4183	836.6	23.7	23.7	0.165	0.165	
		0	Right Touch	4183	836.6	23.7	23.7	0.262	0.262	
		0	Righttt Tilt	4183	836.6	23.7	23.7	0.141	0.141	
Body-worn	Rel 99 RMC	15	Rear	4183	836.6	23.7	23.7	0.352	0.352	10
		15	Front	4183	836.6	23.7	23.7	0.244	0.244	

12.4. W-CDMA Band II

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	9400	1880.0	23.7	23.7	0.424	0.424	11
		0	Left Tilt	9400	1880.0	23.7	23.7	0.141	0.141	
		0	Right Touch	9400	1880.0	23.7	23.7	0.241	0.241	
		0	Righttt Tilt	9400	1880.0	23.7	23.7	0.124	0.124	
Body-worn	Rel 99 RMC	15	Rear	9400	1880.0	23.7	23.7	0.386	0.386	12
		15	Front	9400	1880.0	23.7	23.7	0.257	0.257	

12.5. LTE Band 4 (10 MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	20175	1732.5	1	0.0	24.2	24.1	0.452	0.463	13
								23.2	22.9	0.359	0.385	
		0	Left Tilt	20175	1732.5	1	0.0	24.2	24.1	0.181	0.185	
								23.2	22.9	0.147	0.158	
		0	Right Touch	20175	1732.5	1	0.0	24.2	24.1	0.360	0.368	
								23.2	22.9	0.288	0.309	
		0	Righttt Tilt	20175	1732.5	1	0.0	24.2	24.1	0.191	0.195	
								23.2	22.9	0.150	0.161	
Body-worn	QPSK	15	Rear	20175	1732.5	1	0	24.2	24.1	0.748	0.765	14
								23.2	22.9	0.584	0.626	
		15	Front	20175	1732.5	1	0	24.2	24.1	0.464	0.475	
								23.2	22.9	0.367	0.393	

12.6. LTE Band 17 (10 MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	23790	710.0	1	25.0	24.2	24.2	0.330	0.330	
								23.2	23.0	0.256	0.268	
		0	Left Tilt	23790	710.0	1	25.0	24.2	24.2	0.206	0.206	
								23.2	23.0	0.165	0.173	
		0	Right Touch	23790	710.0	1	25.0	24.2	24.2	0.470	0.470	15
								23.2	23.0	0.363	0.380	
		0	Righttt Tilt	23790	710.0	1	25.0	24.2	24.2	0.230	0.230	
								23.2	23.0	0.195	0.204	
Body-worn	QPSK	15	Rear	23790	710.0	1	25.0	24.2	24.2	0.497	0.497	16
								23.2	23.0	0.387	0.405	
		15	Front	23790	710.0	1	25.0	24.2	24.2	0.322	0.322	
								23.2	23.0	0.254	0.266	

12.7. Wi-Fi (DTS Band)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	802.11b	0	Left Touch	1	2412	16.7	15.9	0.141	0.170	17
			Left Tilt	1	2412	16.7	15.9	0.103	0.124	
			Right Touch	1	2412	16.7	15.9	0.236	0.284	
			Right Tilt	1	2412	16.7	15.9	0.150	0.180	
Body-worn & Wi-Fi Direct	802.11b	10	Rear	1	2412	16.7	15.9	0.103	0.124	18
			Front	1	2412	16.7	15.9	0.050	0.060	
Wi-Fi Direct	802.11b	10	Edge 1	1	2412	16.7	15.9	0.037	0.044	
			Edge 4	1	2412	16.7	15.9	0.076	0.091	

12.8. Bluetooth

12.8.1. Standalone SAR Test Exclusion Considerations

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$, for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f_{(\text{GHz})}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Body-worn Accessory Exposure Conditions

Max. tune-up tolerance limit		Min. test separation distance (mm)	Frequency (GHz)	Result
(dBm)	(mW)			
10.9	12	15	2.480	1.3

Conclusion:

The computed value is < 3 ; therefore, Bluetooth qualifies for Standalone SAR test exclusion.

12.8.2. Estimated SAR

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f_{(\text{GHz})}/x}]$ W/kg for test separation distances ≤ 50 mm; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Estimated SAR Result for Body-worn Accessory Conditions:

Test Configuration	Max. tune-up tolerance limit (mW)	Min. test separation distance (mm)	Frequency (GHz)	Estimated 1-g SAR (W/kg)
Rear/Front	12	15	2.480	0.168

13. SAR Measurement Variability

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

13.1. The Highest Measured SAR Configuration in Each Frequency Band

Frequency Band (MHz)	Air Interface	Head (W/kg)	Body-worn Accessory (W/kg)	Wi-Fi Direct (W/kg)	Repeated SAR (Yes/No)
700	LTE Band 17	0.470	0.497	N/A	No
850	GSM 850	0.356	0.389	N/A	No
	WCDMA Band V			N/A	No
1750	LTE Band 4	0.452	0.748	N/A	No
1900	GSM 1900			N/A	No
	WCDMA Band II	0.424	0.386	N/A	No
2400	Wi-Fi 802.11b/g/n	0.236	0.103	0.103	No

13.2. Repeated Measurement Results

Head Exposure Condition

Not Applicable.

Body-worn Accessory Exposure Condition

Not Applicable.

Wi-Fi Direct Exposure Conditions

Not Applicable.

Note(s):

1. Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20.

14. Simultaneous Transmission SAR Analysis

KDB 447498 D01 General RF Exposure Guidance, introduces a new formula for calculating the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / Ri$$

Where:

SAR₁ is the highest reported or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest reported or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

Ri is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured for both antennas in the pair, it is determined by the actual x, y, and z coordinates in the 1-g SAR for each SAR Peak Location; based on the extrapolated and interpolated result in the zoom scan measurement using the formula:

$$[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$$

A new threshold of 0.04 is also introduced in the KDB 447498. Thus, in order for a pair of simultaneously transmitting antennas, with the sum of 1-g SAR > 1.6 W/kg, to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / Ri < 0.04$$

14.1. Sum of the SAR for GSM850 & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario			∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			GSM 850	Wi-Fi (DTS)	Bluetooth		
Head	Left Touch	WWAN + Wi-Fi(DTS)	0.409	0.170		0.579	No
	Left Tilt	WWAN + Wi-Fi(DTS)	0.197	0.124		0.321	No
	Right Touch	WWAN + Wi-Fi(DTS)	0.321	0.284		0.605	No
	Right Tilt	WWAN + Wi-Fi(DTS)	0.177	0.180		0.357	No
Body-worn Accessory	Rear	WWAN + Wi-Fi(DTS)	0.398	0.124		0.522	No
		WWAN + BT	0.398		0.168	0.566	No
	Front	WWAN + Wi-Fi(DTS)	0.261	0.060		0.321	No
		WWAN + BT	0.261		0.168	0.429	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

14.2. Sum of the SAR for GSM1900 & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario			∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			GSM 1900	Wi-Fi (DTS)	Bluetooth		
Head	Left Touch	WWAN + Wi-Fi(DTS)	0.195	0.170		0.365	No
	Left Tilt	WWAN + Wi-Fi(DTS)	0.067	0.124		0.191	No
	Right Touch	WWAN + Wi-Fi(DTS)	0.119	0.284		0.403	No
	Right Tilt	WWAN + Wi-Fi(DTS)	0.058	0.180		0.238	No
Body-worn Accessory	Rear	WWAN + Wi-Fi(DTS)	0.211	0.124		0.335	No
		WWAN + BT	0.211		0.168	0.379	No
	Front	WWAN + Wi-Fi(DTS)	0.133	0.060		0.193	No
		WWAN + BT	0.133		0.168	0.301	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

14.3. Sum of the SAR for WCDMA Band V & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario			∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			W-CDMA Band V	Wi-Fi (DTS)	Bluetooth		
Head	Left Touch	WWAN + Wi-Fi(DTS)	0.337	0.170		0.507	No
	Left Tilt	WWAN + Wi-Fi(DTS)	0.165	0.124		0.289	No
	Right Touch	WWAN + Wi-Fi(DTS)	0.262	0.284		0.546	No
	Right Tilt	WWAN + Wi-Fi(DTS)	0.141	0.180		0.321	No
Body-worn Accessory	Rear	WWAN + Wi-Fi(DTS)	0.352	0.124		0.476	No
		WWAN + BT	0.352		0.168	0.520	No
	Front	WWAN + Wi-Fi(DTS)	0.244	0.060		0.304	No
		WWAN + BT	0.244		0.168	0.412	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

14.4. Sum of the SAR for WCDMA Band II & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario			∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			W-CDMA Band II	Wi-Fi (DTS)	Bluetooth		
Head	Left Touch	WWAN + Wi-Fi(DTS)	0.424	0.170		0.594	No
	Left Tilt	WWAN + Wi-Fi(DTS)	0.141	0.124		0.265	No
	Right Touch	WWAN + Wi-Fi(DTS)	0.241	0.284		0.525	No
	Right Tilt	WWAN + Wi-Fi(DTS)	0.124	0.180		0.304	No
Body-worn Accessory	Rear	WWAN + Wi-Fi(DTS)	0.386	0.124		0.510	No
		WWAN + BT	0.386		0.168	0.554	No
	Front	WWAN + Wi-Fi(DTS)	0.257	0.060		0.317	No
		WWAN + BT	0.257		0.168	0.425	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

14.5. Sum of the SAR for LTE Band 4 & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario			∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			LTE Band 4	Wi-Fi (DTS)	Bluetooth		
Head	Left Touch	WWAN + Wi-Fi(DTS)	0.463	0.170		0.633	No
	Left Tilt	WWAN + Wi-Fi(DTS)	0.185	0.124		0.309	No
	Right Touch	WWAN + Wi-Fi(DTS)	0.368	0.284		0.652	No
	Right Tilt	WWAN + Wi-Fi(DTS)	0.195	0.180		0.375	No
Body-worn Accessory	Rear	WWAN + Wi-Fi(DTS)	0.765	0.124		0.889	No
		WWAN + BT	0.765		0.168	0.933	No
	Front	WWAN + Wi-Fi(DTS)	0.475	0.060		0.535	No
		WWAN + BT	0.475		0.168	0.643	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

14.6. Sum of the SAR for LTE Band 17 & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario			∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			LTE Band 17	Wi-Fi (DTS)	Bluetooth		
Head	Left Touch	WWAN + Wi-Fi(DTS)	0.330	0.170		0.500	No
	Left Tilt	WWAN + Wi-Fi(DTS)	0.206	0.124		0.330	No
	Right Touch	WWAN + Wi-Fi(DTS)	0.470	0.284		0.754	No
	Right Tilt	WWAN + Wi-Fi(DTS)	0.230	0.180		0.410	No
Body-worn Accessory	Rear	WWAN + Wi-Fi(DTS)	0.497	0.124		0.621	No
		WWAN + BT	0.467		0.168	0.635	No
	Front	WWAN + Wi-Fi(DTS)	0.322	0.060		0.382	No
		WWAN + BT	0.322		0.168	0.490	No

SAR to Peak Location Separation Ratio (SPLSR)

As the Sum of the SAR is not greater than 1.6 W/kg SPLSR assessment is not required.

15. Appendixes

Refer to separated files for the following appendixes.

- 15.1. Photos and Antenna Locations**
- 15.2. System Performance Check Plots**
- 15.3. Highest SAR Test Plots**
- 15.4. Calibration Certificate for E-Field Probe EX3DV4 - SN 3929**
- 15.5. Calibration Certificate for E-Field Probe EX3DV4 - SN 3902**
- 15.6. Calibration Certificate for E-Field Probe EX3DV3 - SN 3936**
- 15.7. Calibration Certificate for E-Field Probe EX3DV4 - SN 3885**
- 15.8. Calibration Certificate for D750V3 - SN 1024**
- 15.9. Calibration Certificate for D835V2 - SN 4d142**
- 15.10. Calibration Certificate for D1750V2 - SN 1077**
- 15.11. Calibration Certificate for D1900V2- SN 5d163**
- 15.12. Calibration Certificate for D2450V2 - SN 706**

END OF REPORT