



FCC CFR47 PART 22 SUBPART H
FCC CFR47 PART 24 SUBPART E
FCC CFR47 PART 27 SUBPART E
FCC CFR47 PART 27 SUBPART L

C2PC CERTIFICATION TEST REPORT

FOR

GSM/WCDMA/LTE Phone + Bluetooth & DTS b/g/n

MODEL NUMBER: LGL31L, L31L, LG-L31L

FCC ID: ZNFL31L

REPORT NUMBER: 14U17021-1

ISSUE DATE: March 31, 2014

Prepared for

**LG ELECTRONICS MOBILECOMM U.S.A., INC
1000 SYLVAN AVENUE
ENGLEWOOD CLIFFS,
NEW JERSEY, 07632, U.S.A.**

Prepared by

**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Issue		Revisions	Revised By
Rev.	Date		
-	3/31/14	Initial issue	P. Kim

TABLE OF CONTENTS

1.	ATTESTATION OF TEST RESULTS	5
2.	TEST METHODOLOGY	6
3.	FACILITIES AND ACCREDITATION	6
4.	CALIBRATION AND UNCERTAINTY	6
4.1.	MEASURING INSTRUMENT CALIBRATION	6
4.2.	SAMPLE CALCULATION	6
4.3.	MEASUREMENT UNCERTAINTY	6
5.	EQUIPMENT UNDER TEST	7
5.1.	DESCRIPTION OF EUT	7
5.2.	MAXIMUM OUTPUT POWER	7
5.3.	MAXIMUM OUTPUT POWER (LTE)	8
5.4.	DESCRIPTION OF AVAILABLE ANTENNAS	9
5.5.	DESCRIPTION OF TEST SETUP	10
6.	TEST AND MEASUREMENT EQUIPMENT	13
7.	Summary Table	14
8.	RF POWER OUTPUT VERIFICATION	15
8.1.	GSM/GPRS/EDGE	15
8.1.1.	GSM OUTPUT POWER RESULT	16
8.2.	UMTS REL 99	17
8.2.1.	UMTS REL 99 OUTPUT POWER RESULT	17
8.3.	UMTS HSDPA	18
8.3.1.	UMTS HSDPA OUTPUT POWER RESULT	19
8.3.2.	UMTS HSUPA	20
8.3.3.	UMTS HSUPA OUTPUT POWER RESULT	21
8.4.	LTE OUTPUT VERIFICATION	22
8.4.1.	LTE OUTPUT RESULT	22
9.	RADIATED TEST RESULTS	25
9.1.	RADIATED POWER (ERP & EIRP)	25
9.1.1.	ERP/EIRP Results	26
9.1.2.	LTE ERP/EIRP Results	28

9.1.3.	ERP/EIRP PLOTS	30
9.2.	<i>FIELD STRENGTH OF SPURIOUS RADIATION</i>	46
9.2.1.	SPURIOUS RADIATION DATA	47
10.	SETUP PHOTOS	63

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: LG ELECTRONICS MOBILECOMM U.S.A., INC.

EUT DESCRIPTION: GSM/WCDMA/LTE Phone + Bluetooth & DTS b/g/n

MODEL: LGL31L, L31L, LG-L31L

SERIAL NUMBER: 1839205

DATE TESTED: MARCH 21-28, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22H, 24E, 27E and 27L	PASS

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For UL Verification Services Inc. By: Tested By:



PHILIP KIM
CONSUMER TECHNOLOGY DIVISION
PROGRAM MANAGER
UL Verification Services Inc.



CHARLES VERGONIO
CONSUMER TECHNOLOGY DIVISION
LAB TECHNICIAN
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-C, FCC CFR 47 Part 22, FCC CFR Part 24, FCC CFR 47 Part 27.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ul.com>

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\text{EIRP} = \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss (between the SG and substitution antenna)} + \text{Substitution Antenna Factor (dBi)}$$

$$\text{ERP} = \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss (between the SG and substitution antenna)}$$

(Path loss = Signal generator output – PSA reading with substitution antenna)

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 18000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone + Bluetooth & DTS b/g/n capability that is manufactured by (LG)

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted and radiated ERP / EIRP output powers as follows:

FCC Part 22/2 4/27						
Band	Frequency Range(MHz)	Modulation Peak	Conducted		Radiated	
			Peak (dBm)	Peak (mW)	Peak (dBm)	Peak (mW)
GSM850	824~849	GMSK	33.70	2344.23		
	824~849	GPRS	33.70	2344.23	27.96	625.32
	824~849	EGPRS	27.50	562.34	23.84	242.61
GSM1900	1850~1910	GMSK	30.70	1174.90		
	1850~1910	GPRS	30.70	1174.90	29.11	814.7
	1850~1910	EGPRS	25.70	371.54	27.32	539.51
Band 5	824~849	REL99	23.70	234.42	19.76	94.62
	824~849	HSDPA	23.70	234.42	20.12	102.80
	824~849	HSUPA	23.70	234.42		
Band 2	1850~1910	REL99	23.70	234.42	25.57	360.58
	1850~1910	HSDPA	23.70	234.42	24.4	275.42
	1850~1910	HSUPA	23.70	234.42		

5.3. MAXIMUM OUTPUT POWER (LTE)

The transmitter has a maximum peak conducted and radiated ERP/EIRP output powers as follows:

FCC Part 27							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation Peak	Conducted		Radiated	
				Peak (dBm)	Peak (mW)	Peak (dBm)	Peak (mW)
LTE17	704~716	10MHz	QPSK	24.20	263.03	18.08	64.28
			16QAM	23.10	204.17	17.53	56.64

FCC Part 27							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation Peak	Conducted		Radiated	
				Peak (dBm)	Peak (mW)	Peak (dBm)	Peak (mW)
LTE17	704~716	5MHz	QPSK	24.20	263.03	18.16	65.48
			16QAM	23.10	204.17	17.45	55.6

FCC Part27							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation Peak	Conducted		Radiated	
				Peak (dBm)	Peak (mW)	Peak (dBm)	Peak (mW)
LTE4	1710~1755	10MHz	QPSK	24.20	263.00	22.68	185.35
			16QAM	23.20	208.90	22.39	173.38

FCC Part 27							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation Peak	Conducted		Radiated	
				Peak (dBm)	Peak (mW)	Peak (dBm)	Peak (mW)
LTE4	1710~1755	5MHz	QPSK	24.20	263.03	22.68	185.35
			16QAM	23.20	208.93	22.41	174.18

5.4. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PIFA antenna for the [List the bands supported] with a maximum peak gain as follow:

Frequency (MHz)	Peak Gain (dBi)
Band 5 824~849MHz	-1.94
Band2 1850~1910MHz	-1.36
LTE4, 1710~1755MHz	-1.41
LTE17, 704~716MHz	-4.48

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	LG	LGL31L	N/A	N/A
Headset	LG	N/A	N/A	N/A

I/O CABLES (CONDUCTED SETUP)

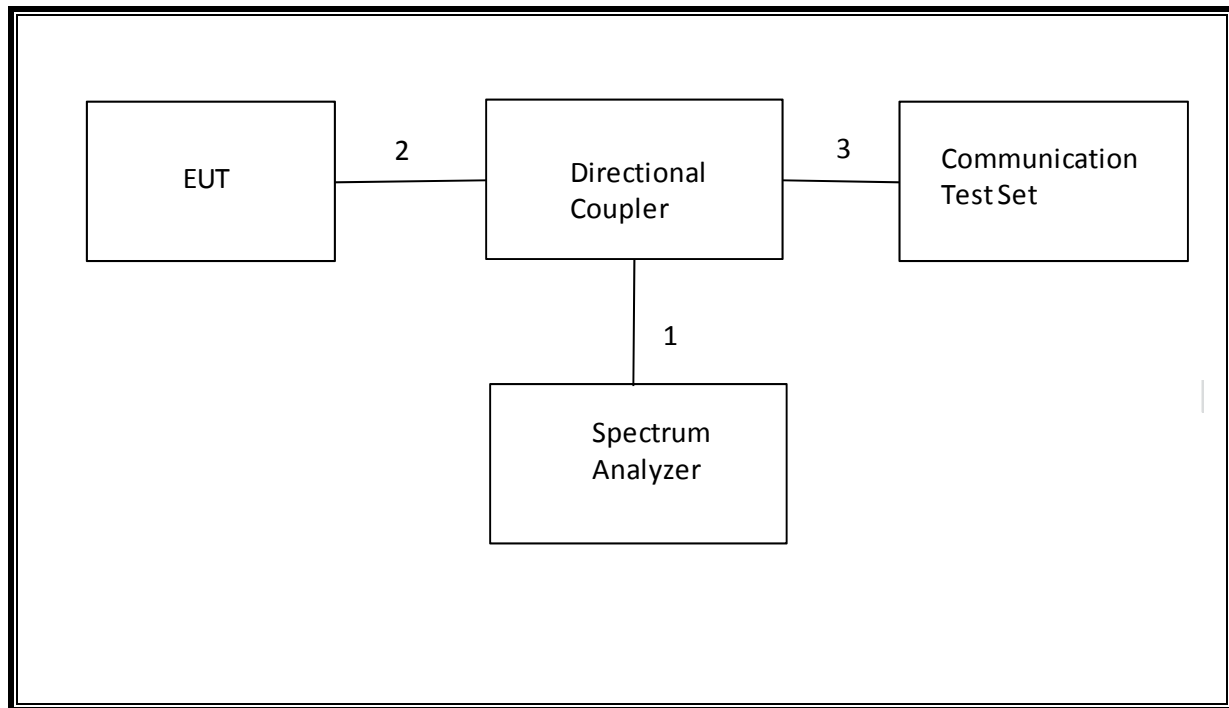
I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF Out	1	Spectrum Analyzer	Shielded	None	NA
2	Antenna Port	1	EUT	Shielded	0.1m	NA
3	RF In/Out	1	Communication Test Set	Shielded	1m	NA

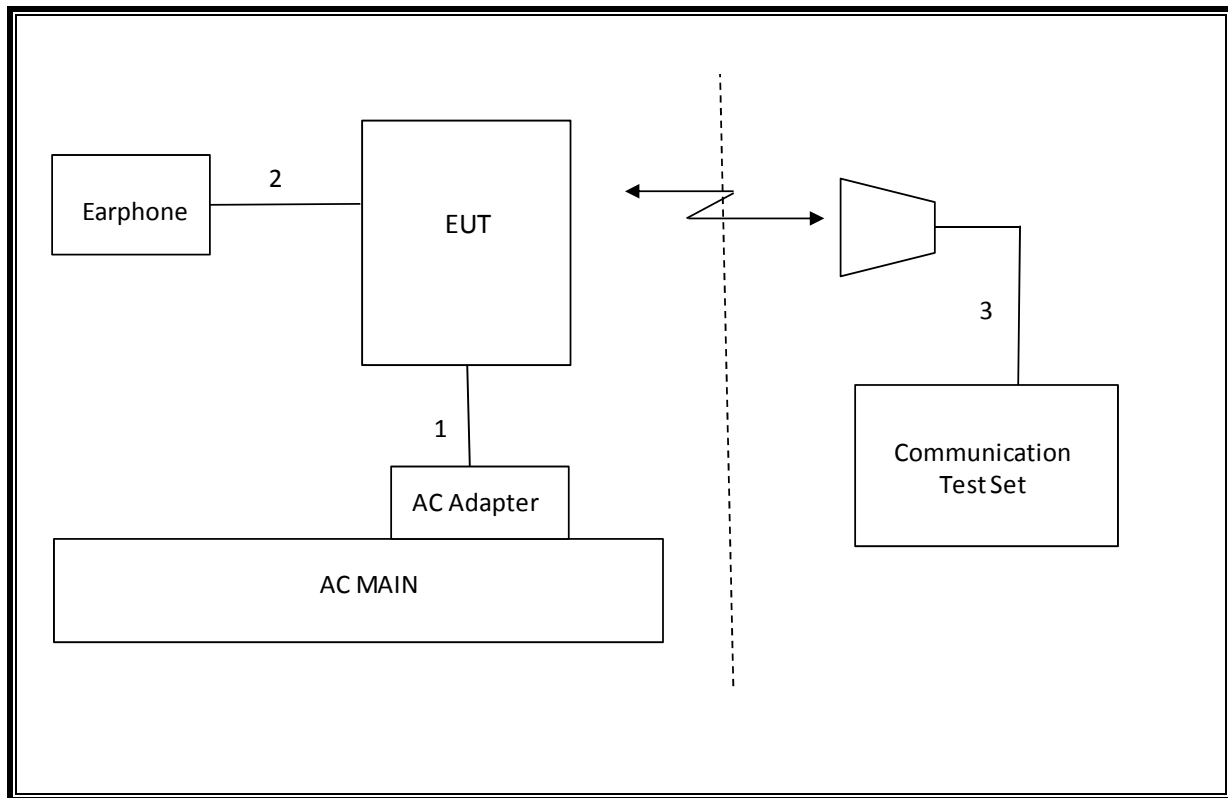
I/O CABLES (RADIATED SETUP)

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	USB	1	AC Adapter	Un-shielded	1.2m	No
2	Jack	1	Headset	Shielded	1m	No
3	RF In/out	1	Communication Test Set	Un-shielded	2m	Yes

TEST SETUP

The EUT is continuously communicated to the call box during the tests.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01179	02/26/14
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01011	08/14/14
Antenna, Horn, 18 GHz	EMCO	3115	C00783	10/25/14
Antenna, Horn, 18 GHz	EMCO	3115	C00784	09/25/14
Highpass Filter, 2.7 GHz	Micro-Tronics	HPM13194	N02687	CNR
Highpass Filter, 1.5 GHz	Micro-Tronics	HPM13193	N02688	CNR
Temperature / Humidity Chamber	Thermotron	SE 600-10-10	C00930	01/09/15
Communications Test Set	R&S	CMW500	T159	07/02/14
DC power supply, 8 V @ 3 A or 15 V	Agilent / HP	E3610A	None	CNR
Vector signal generator, 6 GHz	Agilent / HP	E4438C	None	07/06/14
Antenna, Tuned Dipole 400~1000	ETS	3121C DB4	C00993	02/14/14
Directional Coupler	RF-Lambda	RFDC5M06G15	None	CNR

7. Summary Table

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst Case
2.1049	N/A	Occupied Band width (99%)	N/A	Conducted	Pass	See original
22.917(a) 24.238(a) 27.53(g) 90.691	RSS-132(4.5.1) RSS-133(6.5.1) RSS-139(6.5.1)	Band Edge / Conducted Spurious Emission	-13dBm		Pass	See original
2.1046	N/A	Conducted output power	N/A		Pass	See original
22.355 24.235 27.54 90.213	RSS-132(4.3) RSS-133(6.3) RSS-139(6.3) RSS-199(4.3)	Frequency Stability	2.5PPM		Pass	See original
22.913(a)(2)	RSS-132(4.4)	Effective Radiated Power	38 dBm	Radiated	Pass	27.96 dBm
27.50(b)(10)	N/A		34.77 dBm		Pass	
24.232(c) 27.50(d)(4)	RSS-133(6.4) RSS-139(6.4)	Equivalent Isotropic Radiated Power	33dBm 30dBm		Pass	29.11 dBm
22.917(a) 24.238(a) 27.53(g)	RSS-132(4.5.1) RSS-133(6.5.1) RSS-139(6.5.1)	Radiated Spurious Emission	-13dBm		Pass	-40.3 dBm

8. RF POWER OUTPUT VERIFICATION

8.1. GSM/GPRS/EDGE

Function: Menu select > GSM Mobile Station > GSM 850/900/1800/1900

Press Connection control to choose the different menus

Press RESET > choose all to reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM+GPRS or GSM+EGPRS

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850/900

> 30 dBm for GPRS1800/1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0> 4 dB

Slot Config > Unchanged (if already set under MS Signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3 (Default)

Network Coding Scheme > CS4 (GPRS) and MCS5 ~ MCS9 (EGPRS)

Bit Stream > 2E9-1PSR Bit Pattern

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press Signal On to turn on the signal and change settings

8.1.1. GSM OUTPUT POWER RESULT

Band	Mode	Ch.	f(MHz)	1 time slot	2 time slot
				Peak (dBm)	Peak (dBm)
GSM850	GMSK	128	824.2	33.7	
		190	836.6	33.7	
		251	848.8	33.6	
	GPRS	128	824.2	33.7	31.2
		190	836.6	33.7	31.1
		251	848.8	33.6	30.9
	EGPRS	128	824.2	27.5	26.6
		190	836.6	27.4	26.5
		251	848.8	27.4	26.5
GSM1900	GMSK	512	1850.2	30.5	
		661	1880	30.7	
		810	1909.8	30.7	
	GPRS	512	1850.2	30.5	28.4
		661	1880	30.7	28.6
		810	1909.8	30.7	28.7
	EGPRS	512	1850.2	25.6	24.5
		661	1880	25.7	24.5
		810	1909.8	25.7	24.5

8.2. UMTS REL 99

TEST PROCEDURE

The following summary of these settings are illustrated below:

WCDMA General Settings	Mode	Rel99
	Subtest	-
	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	HSDPA FRC	Not Applicable
	HSUPA Test	Not Applicable
	Power Control Algorithm	Algorithm2
	β_c	Not Applicable
	β_d	Not Applicable
	β_{ec}	Not Applicable
	β_c/β_d	8/15
	β_{hs}	Not Applicable
	β_{ed}	Not Applicable

8.2.1. UMTS REL 99 OUTPUT POWER RESULT

Band	Mode	Ch.	f(MHz)	Conducted Power (dBm)
				Avg (dBm)
Band 5	REL99	4132	826.4	23.7
		4183	836.6	23.7
		4233	846.6	23.6
Band 2	REL99	9262	1852.4	23.7
		9400	1880	23.7
		9538	1907.6	23.5

8.3. UMTS HSDPA

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	Rel5 HSDPA			
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR (dB)	0	0	0.5	0.5
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs} = \beta_{hs}/\beta_c$	30/15			

8.3.1. UMTS HSDPA OUTPUT POWER RESULT

Band	Mode	Subset	Ch.	f(MHz)	Conducted Power (dBm)
					Avg (dBm)
Band 5	HSDPA	1	4132	826.4	23.5
			4183	836.6	23.7
			4233	846.6	23.5
		2	4132	826.4	23.6
			4183	836.6	23.6
			4233	846.6	23.6
		3	4132	826.4	23.1
			4183	836.6	23.1
			4233	846.6	23.1
		4	4132	826.4	23.2
			4183	836.6	23.1
			4233	846.6	23.1
Band 2	HSDPA	1	9262	1852.4	23.6
			9400	1880	23.7
			9538	1907.6	23.5
		2	9262	1852.4	23.7
			9400	1880	23.7
			9538	1907.6	23.7
		3	9262	1852.4	23.1
			9400	1880	23.2
			9538	1907.6	23.1
		4	9262	1852.4	23.2
			9400	1880	23.2
			9538	1907.6	23.1

8.3.2. UMTS HSUPA

TEST PROCEDURE

The following summary of these settings are illustrated below: (ETSI TS 134.121-1 Table C.11.1)

	Mode	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	P-CPICH (dB)	-10				
	P-CCPCH (dB)	-12				
	SCH (dB)	-12				
	PICH(dB)	-15				
	DPCH (dB)	-9				
	HS-SCCH 1 (dB)	-8				
	HS-PDSCH (dB)	-3				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	Bc	11/15	6/15	15/15	2/15	15/15
	Bd	15/15	15/15	9/15	15/15	15/15
	Bec	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	15/15
	Bhs	22/15	12/15	30/15	4/15	30/15
HSDPA Specific Settings	β_{ed} (note1)	1309/225	94/75	47/15	56/75	134/15
	MPR	0	2	1	2	0
	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
HSUPA Specific Settings	Ahs = β_{hs}/β_c	30/15				
	D E-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	Reference E-TFCIs	5	5	2	5	5
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_TFCIs	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27		E-TFCI 11 E-TFCI PO 4 E-TFCI 92 E-TFCI PO 18		E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27

Note1: β_{ed} cannot be set directly, it is set by Absolute Grant Value.

8.3.3. UMTS HSUPA OUTPUT POWER RESULT

Band	Mode	Subset	Ch.	f(MHz)	Conducted Power (dBm)
					Avg (dBm)
Band 5	HSUPA	1	4132	826.4	23.5
			4183	836.6	23.1
			4233	846.6	23.5
		2	4132	826.4	21.3
			4183	836.6	21.9
			4233	846.6	22.0
		3	4132	826.4	22.3
			4183	836.6	22.6
			4233	846.6	22.4
		4	4132	826.4	22.3
			4183	836.6	22.4
			4233	846.6	22.2
		5	4132	826.4	23.7
			4183	836.6	23.7
			4233	846.6	23.7
Band 2	HSUPA	1	9262	1852.4	23.1
			9400	1880	23.2
			9538	1907.6	23.2
		2	9262	1852.4	22.3
			9400	1880	22.3
			9538	1907.6	21.7
		3	9262	1852.4	22.4
			9400	1880	22.6
			9538	1907.6	22.5
		4	9262	1852.4	22.1
			9400	1880	22.4
			9538	1907.6	22.1
		5	9262	1852.4	23.7
			9400	1880	23.6
			9538	1907.6	23.6

8.4. LTE OUTPUT VERIFICATION

8.4.1. LTE OUTPUT RESULT

Band	Frequency	Modulation	BW (MHz)	RB Size	RB Offset	Average
LTE17	710	QPSK	10	1	0	24.0
				1	24	24.2
				1	49	24.2
				25	0	22.8
				25	11	23.0
				25	24	23.0
	710	16QAM		50	0	23.1
				1	0	22.9
				1	24	23.1
				1	49	23.1
				25	0	21.8
				25	11	21.9
				25	24	22.1
				50	0	22.0

Band	Frequency	Modulation	BW (MHz)	RB Size	RB Offset	Average
LTE17	710	QPSK	5	1	0	23.9
				1	11	24.2
				1	24	24.1
				12	0	23.0
				12	5	23.2
				12	11	23.0
	710	16QAM		25	0	23.0
				1	0	22.8
				1	11	23.0
				1	24	23.1
				12	0	21.9
				12	5	22.1
				12	11	22.0
				25	0	22.0

Band	Frequency	Modulation	BW (MHz)	RB Size	RB Offset	Average
LTE4	1715	QPSK	10	1	0	24.1
				1	24	24.0
				1	49	24.1
				25	0	23.0
				25	11	23.0
				25	24	23.0
	1715	16QAM		50	0	22.9
				1	0	23.1
				1	24	23.1
				1	49	23.1
				25	0	21.9
				25	11	21.8
	1715	16QAM		25	24	21.8
				50	0	21.8
				1	0	24.1
				1	24	24.0
				1	49	24.1
				25	0	22.9
	1732.5	QPSK		25	11	22.9
				25	24	22.9
				50	0	23.0
				1	0	23.2
				1	24	23.1
				1	49	23.1
	1732.5	16QAM		25	0	21.9
				25	11	22.0
				25	24	22.0
				50	0	21.9
				1	0	24.2
				1	24	24.1
	1750	QPSK		1	49	24.2
				25	0	22.8
				25	11	22.9
				25	24	22.9
				50	0	22.8
				1	0	23.1
	1750	16QAM		1	24	23.0
				1	49	23.1
				25	0	21.8
				25	11	21.8
				25	24	21.8
				50	0	21.8

Band	Frequency	Modulation	BW (MHz)	RB Size	RB Offset	Max Peak	Average
LTE4	1712.5	QPSK	5	1	0		24.2
				1	11		24.2
				1	24		24.1
				12	0		23.2
				12	5		23.2
				12	11		23.2
	1712.5	16QAM		25	0		23.2
				1	0		23.2
				1	11		23.1
				1	24		23.2
				12	0		21.9
				12	5		22.0
	1732.5	QPSK		12	11		22.1
				25	0		22.0
				1	0		24.1
				1	11		24.1
				1	24		24.1
				12	0		23.1
	1732.5	16QAM		12	5		23.1
				12	11		23.1
				25	0		23.1
				1	0		23.1
				1	11		23.1
				1	24		23.2
	1752.5	QPSK		12	0		22.0
				12	5		22.0
				12	11		22.1
				25	0		22.0
				1	0		24.1
				1	11		24.2
	1752.5	16QAM		1	24		24.2
				12	0		23.1
				12	5		23.2
				12	11		23.1
				25	0		23.1
				1	0		23.1
				1	11		23.1
				1	24		23.1
				12	0		22.0
				12	5		22.1
				12	11		22.0
				25	0		22.1

9. RADIATED TEST RESULTS

9.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913, §24.232

LIMITS

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232(c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13dB.

TEST PROCEDURE

ANSI / TIA / EIA 603C Clause 2.2.17

MODES TESTED

WCDMA Band 2 and Band 5

GSM 850 and 1900

LTE 4 and LTE 17

TEST RESULTS**9.1.1. ERP/EIRP Results**

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
Band 2	REL99	9262	1852.4	25.57	360.58
		9400	1880	22.88	194.09
		9538	1907.6	23.36	216.77
	HSDPA	9262	1852.4	24.4	275.42
		9400	1880	22.19	165.58
		9538	1907.6	23.23	210.38

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
Band 5	REL99	4132	826.6	19.76	94.62
		4183	836.6	18.83	76.38
		4233	846.4	19.56	90.36
	HSDPA	4132	826.6	20.12	102.80
		4183	836.6	19.26	84.33
		4233	846.4	20.09	102.09

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
GSM1900	GMSK	512	1850.2		
		661	1880		
		810	1909.8		
	GPRS	512	1850.2	29.11	814.7
		661	1880	27.08	510.5
		810	1909.8	28.07	641.21
	EGPRS	512	1850.2	27.32	539.51
		661	1880	25.3	338.84
		810	1909.8	26.98	498.88

Band	Mode	Channel	f(MHz)	ERP / EIRP	
				dBm	mW
GSM850	GMSK	128	824.2		
		190	836.6		
		251	848.8		
	GPRS	128	824.2	27.251	531.01
		190	836.6	27.961	625.32
		251	848.8	27.651	582.24
	EGPRS	128	824.2	21.341	136.18
		190	836.6	23.434	220.5
		251	848.8	23.849	242.61

9.1.2. LTE ERP/EIRP Results

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE17	10	QPSK	1/0	709	17.161	52.01
			1/0	710	17.621	57.82
			1/0	711	18.081	64.28
		16QAM	1/0	709	16.411	43.76
			1/0	710	17.531	56.64
			1/0	711	16.981	49.9

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE17	5	QPSK	1/0	706.5	16.891	48.88
			1/0	710	16.911	49.1
			1/0	713.5	18.161	65.48
		16QAM	1/0	706.5	15.881	38.73
			1/0	710	16.881	48.76
			1/0	713.5	17.451	55.6

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP	
					dBm	mW
LTE4	10	QPSK	1/0	1715	22.18	165.2
			1/0	1732.5	21.64	145.88
			1/0	1750	22.68	185.35
		16QAM	1/0	1715	21.57	143.55
			1/0	1732.5	20.7	117.49
			1/0	1750	22.39	173.38

Band	BW (MHz)	Mode	RB/RB Size	f (MHz)	ERP / EIRP
------	----------	------	------------	---------	------------

					dBm	mW
LTE4	5	QPSK	1/0	1712.5	22.16	164.44
			1/0	1732.5	22.63	183.23
			1/0	1752.5	22.76	188.80
		16QAM	1/0	1712.5	21.14	130.01
			1/0	1732.5	22.41	174.18
			1/0	1752.5	21.61	144.88

9.1.3. ERP/EIRP PLOTS

Band
LTE17
10MHz
z
16QAM

High Frequency Substitution Measurement
UL Verification Services, Inc. Chamber C

Company: LG
Project #: 14U17021
Date: 03/27/14
Test Engineer: R. Alegre
Configuration: EUT, X position
Mode: LTE Band 17_10MHz_16QAM

Test Equipment:
Receiving: Sunol T407, and 3m Chamber N-type Cable (Setup this one for testing EUT)
Substitution: Dipole S/N: 00022117, 4ft SMA Cable (SN # 245200 001) Warehouse.

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
709.00	13.50	V	0.9	0.0	12.60	38.5	-25.8	
709.00	17.31	H	0.9	0.0	16.41	38.5	-22.0	
Mid Ch								
710.00	13.57	V	0.9	0.0	12.67	38.5	-25.8	
710.00	18.43	H	0.9	0.0	17.53	38.5	-20.9	
High Ch								
711.00	14.46	V	0.9	0.0	13.56	38.5	-24.9	
711.00	17.88	H	0.9	0.0	16.98	38.5	-21.5	

Rev. 3.17.11
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm

Band LTE17 10MHz z QPSK	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
	Company:		LG						
	Project #:		14U17021						
	Date:		03/27/14						
	Test Engineer:		R. Alegre						
	Configuration:		EUT, X position						
	Mode:		LTE Band 17_10MHz_QPSK						
	Test Equipment:								
	Receiving: Sunol T407, and 3m Chamber N-type Cable (Setup this one for testing EUT)								
	Substitution: Dipole S/N: 00022117, 4ft SMA Cable (SN # 245200 001) Warehouse.								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
	Low Ch								
	709.00	13.85	V	0.9	0.0	12.95	38.5	-25.5	
	709.00	18.06	H	0.9	0.0	17.16	38.5	-21.3	
	Mid Ch								
	710.00	14.77	V	0.9	0.0	13.87	38.5	-24.6	
	710.00	18.52	H	0.9	0.0	17.62	38.5	-20.8	
	High Ch								
	711.00	15.60	V	0.9	0.0	14.70	38.5	-23.7	
	711.00	18.98	H	0.9	0.0	18.08	38.5	-20.4	
Rev. 3.17.11									
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm									

Band LTE17 5MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
	Company:		LG						
	Project #:		14U17021						
	Date:		03/27/14						
	Test Engineer:		R. Alegre						
	Configuration:		EUT, X position						
	Mode:		LTE Band 17_5MHz_16QAM						
	Test Equipment:								
	Receiving: Sunol T407, and 3m Chamber N-type Cable (Setup this one for testing EUT)								
	Substitution: Dipole S/N: 00022117, 4ft SMA Cable (SN # 245200 001) Warehouse.								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
	Low Ch								
	706.50	13.45	V	0.9	0.0	12.55	38.5	-25.9	
	706.50	16.78	H	0.9	0.0	15.88	38.5	-22.6	
	Mid Ch								
	710.00	14.39	V	0.9	0.0	13.49	38.5	-25.0	
	710.00	17.78	H	0.9	0.0	16.88	38.5	-21.6	
	High Ch								
	713.50	14.25	V	0.9	0.0	13.35	38.5	-25.1	
	713.50	18.35	H	0.9	0.0	17.45	38.5	-21.0	
Rev. 3.17.11									
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm									

Band LTE17 5MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
	Company:		LG						
	Project #:		14U17021						
	Date:		03/27/14						
	Test Engineer:		R. Alegre						
	Configuration:		EUT, X position						
	Mode:		LTE Band 17_5MHz_QPSK						
	Test Equipment:								
	Receiving: Sunol T407, and 3m Chamber N-type Cable (Setup this one for testing EUT)								
	Substitution: Dipole S/N: 00022117, 4ft SMA Cable (SN # 245200 001) Warehouse.								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
	Low Ch								
	706.50	13.93	V	0.9	0.0	13.03	38.5	-25.4	
	706.50	17.79	H	0.9	0.0	16.89	38.5	-21.6	
	Mid Ch								
	710.00	15.66	V	0.9	0.0	14.76	38.5	-23.7	
	710.00	17.81	H	0.9	0.0	16.91	38.5	-21.5	
	High Ch								
	713.50	15.50	V	0.9	0.0	14.60	38.5	-23.8	
	713.50	19.06	H	0.9	0.0	18.16	38.5	-20.3	
Rev. 3.17.11									
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm									

Band LTE4 10MHz z 16QAM M	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
	Company:		LG						
	Project #:		14U17021						
	Date:		03/25/14						
	Test Engineer:		R. Alegre						
	Configuration:		EUT only, Z position						
	Mode:		LTE_B4_10MHz_16QAM						
	Test Equipment:								
	Receiving: Horn T119, and Chamber C SMA Cables								
	Substitution: Horn T59 Substitution, 4ft SMA Cable Warehouse								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
	Low Ch								
	1715.00	12.95	V	0.85	8.29	20.39	33.0	-12.6	
	1715.00	14.13	H	0.85	8.29	21.57	33.0	-11.4	
	Mid Ch								
	1732.50	11.84	V	0.85	8.29	19.28	33.0	-13.7	
	1732.50	13.26	H	0.85	8.29	20.70	33.0	-12.3	
	High Ch								
	1750.00	14.49	V	0.85	7.92	21.56	33.0	-11.4	
	1750.00	15.32	H	0.85	7.92	22.39	33.0	-10.6	
Rev. 3.17.11									
Note: For Band 4 EIRP limit is 30dBm									

Band LTE4 10MHz z QPSK	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
	Company:		LG						
	Project #:		14U17021						
	Date:		03/25/14						
	Test Engineer:		R. Alegre						
	Configuration:		EUT only, Z position						
	Mode:		LTE_B4_10MHz_QPSK						
	Test Equipment:								
	Receiving: Horn T119, and Chamber C SMA Cables								
	Substitution: Horn T59 Substitution, 4ft SMA Cable Warehouse								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch									
1715.00	14.29	V	0.85	8.29	21.73	33.0	-11.3		
1715.00	14.74	H	0.85	8.29	22.18	33.0	-10.8		
Mid Ch									
1732.50	12.49	V	0.85	8.29	19.93	33.0	-13.1		
1732.50	14.20	H	0.85	8.29	21.64	33.0	-11.4		
High Ch									
1750.00	14.85	V	0.85	7.92	21.92	33.0	-11.1		
1750.00	15.61	H	0.85	7.92	22.68	33.0	-10.3		
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm									

Band LTE4 5MHz 16QAM	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
	Company:		LG						
	Project #:		14U17021						
	Date:		03/25/14						
	Test Engineer:		R. Alegre						
	Configuration:		EUT only, Z position						
	Mode:		LTE_B4_5MHz_16QAM						
	Test Equipment:								
	Receiving: Horn T119, and Chamber C SMA Cables								
	Substitution: Horn T59 Substitution, 4ft SMA Cable Warehouse								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
	Low Ch								
	1712.00	11.39	V	0.85	8.29	18.83	33.0	-14.2	
	1712.00	13.70	H	0.85	8.29	21.14	33.0	-11.9	
	Mid Ch								
	1732.00	13.65	V	0.85	8.29	21.09	33.0	-11.9	
	1732.00	14.97	H	0.85	8.29	22.41	33.0	-10.6	
	High Ch								
	1752.00	14.71	V	0.85	7.92	21.78	33.0	-11.2	
	1752.00	14.54	H	0.85	7.92	21.61	33.0	-11.4	
Rev. 3.17.11									
Note: For Band 4 EIRP limit is 30dBm									

Band LTE4 5MHz QPSK	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
	Company: LG								
	Project #: 14U17021								
	Date: 03/25/14								
	Test Engineer: R. Alegre								
	Configuration: EUT only, Z position								
	Mode: LTE_B4_5MHz_QPSK								
	Test Equipment:								
	Receiving: Horn T119, and Chamber C SMA Cables								
	Substitution: Horn T59 Substitution, 4ft SMA Cable Warehouse								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
	Low Ch								
	1712.00	11.97	V	0.85	8.29	19.41	33.0	-13.6	
	1712.00	14.72	H	0.85	8.29	22.16	33.0	-10.8	
	Mid Ch								
	1732.00	14.69	V	0.85	8.29	22.13	33.0	-10.9	
	1732.00	15.19	H	0.85	8.29	22.63	33.0	-10.4	
	High Ch								
	1752.00	15.69	V	0.85	7.92	22.76	33.0	-10.2	
	1752.00	15.49	H	0.85	7.92	22.56	33.0	-10.4	
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm									

Band 2 HSDPA	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
	Company:		LG						
	Project #:		14U17021						
	Date:		03/25/14						
	Test Engineer:		R. Alegre						
	Configuration:		X Position, EUT only						
	Mode:		WCDMA_HSDPA_1900						
	Test Equipment:								
	Receiving: Horn T119, and Chamber C SMA Cables								
	Substitution: Horn T59 Substitution, 4ft SMA Cable Warehouse								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
	Low Ch								
	1852.40	8.13	V	0.85	7.9	15.13	33.0	-17.9	
	1852.40	17.40	H	0.85	7.9	24.40	33.0	-8.6	
	Mid Ch								
	1880.00	7.13	V	0.85	7.9	14.20	33.0	-18.8	
	1880.00	15.12	H	0.85	7.9	22.19	33.0	-10.8	
	High Ch								
	1907.60	7.87	V	0.85	7.9	14.87	33.0	-18.1	
	1907.60	16.23	H	0.85	7.9	23.23	33.0	-9.8	
Rev. 3.17.11									
Note: For Band 4 EIRP limit is 30dBm									

Band 2 REL99	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
	Company:		LG						
	Project #:		14U17021						
	Date:		03/25/14						
	Test Engineer:		R. Alegre						
	Configuration:		X Position, EUT only						
	Mode:		WCDMA_Rel 99_1900						
	Test Equipment:								
	Receiving: Horn T119, and Chamber C SMA Cables								
	Substitution: Horn T59 Substitution, 4ft SMA Cable Warehouse								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
	Low Ch								
	1852.40	8.56	V	0.85	7.9	15.56	33.0	-17.4	
	1852.40	18.57	H	0.85	7.9	25.57	33.0	-7.4	
	Mid Ch								
	1880.00	7.36	V	0.85	7.9	14.43	33.0	-18.6	
	1880.00	15.81	H	0.85	7.9	22.88	33.0	-10.1	
	High Ch								
	1907.60	9.27	V	0.85	7.9	16.27	33.0	-16.7	
	1907.60	16.36	H	0.85	7.9	23.36	33.0	-9.6	
Rev. 3.17.11									
Note: For Band 4 EIRP limit is 30dBm									

Band 5 HSDPA	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
	Company:		LG						
	Project #:		14U17021						
	Date:		03/21/14						
	Test Engineer:		R. Alegre						
	Configuration:		EUT, Y Position						
	Mode:		WCDMA_HSDPA_850						
	Test Equipment:								
	Receiving: Sunol T407, and 3m Chamber N-type Cable (Setup this one for testing EUT)								
	Substitution: Dipole S/N: 00022117, 4ft SMA Cable (SN # 245200 001) Warehouse.								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
	Low Ch								
	826.60	15.88	V	0.9	0.0	14.98	38.5	-23.5	
	826.60	21.02	H	0.9	0.0	20.12	38.5	-18.3	
	Mid Ch								
	836.60	15.08	V	0.9	0.0	14.18	38.5	-24.3	
	836.60	20.16	H	0.9	0.0	19.26	38.5	-19.2	
	High Ch								
	846.40	15.77	V	0.9	0.0	14.87	38.5	-23.6	
	846.40	20.99	H	0.9	0.0	20.09	38.5	-18.4	
Rev. 3.17.11									
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm									

Band 5 REL99	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
	Company:		LG						
	Project #:		14U17021						
	Date:		03/21/14						
	Test Engineer:		R. Alegre						
	Configuration:		EUT, Y Position						
	Mode:		WCDMA_Rel99_850						
	Test Equipment:								
	Receiving: Sunol T407, and 3m Chamber N-type Cable (Setup this one for testing EUT)								
	Substitution: Dipole S/N: 00022117, 4ft SMA Cable (SN # 245200 001) Warehouse.								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
	Low Ch								
	826.60	15.81	V	0.9	0.0	14.91	38.5	-23.5	
	826.60	20.66	H	0.9	0.0	19.76	38.5	-18.7	
	Mid Ch								
	836.60	14.72	V	0.9	0.0	13.82	38.5	-24.6	
	836.60	19.73	H	0.9	0.0	18.83	38.5	-19.6	
	High Ch								
	846.40	15.60	V	0.9	0.0	14.70	38.5	-23.7	
	846.40	20.46	H	0.9	0.0	19.56	38.5	-18.9	
Rev. 3.17.11									
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm									

Band GSM1 900 EGPRS	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
	Company:		LG						
	Project #:		14U17021						
	Date:		03/24/14						
	Test Engineer:		R. Alegre						
	Configuration:		X Position, EUT only						
	Mode:		EGPRS 1900MHz						
	Test Equipment:								
	Receiving: Horn T119, and Chamber C SMA Cables								
	Substitution: Horn T59 Substitution, 4ft SMA Cable Warehouse								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes
	Low Ch								
	1850.20	8.28	V	0.85	7.9	15.28	33.0	-17.7	
	1850.20	20.32	H	0.85	7.9	27.32	33.0	-5.7	
	Mid Ch								
	1880.00	9.34	V	0.85	7.9	16.41	33.0	-16.6	
	1880.00	18.23	H	0.85	7.9	25.30	33.0	-7.7	
	High Ch								
	1909.80	14.49	V	0.85	7.9	21.49	33.0	-11.5	
	1909.80	19.98	H	0.85	7.9	26.98	33.0	-6.0	
Rev. 3.17.11									
Note: For Band 4 EIRP limit is 30dBm									

Band GSM1 900 GPRS	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C																																																																																																
	Company: LG																																																																																																
	Project #: 14U17021																																																																																																
	Date: 03/24/14																																																																																																
	Test Engineer: R. Alegre																																																																																																
	Configuration: X Position, EUT only																																																																																																
	Mode: GPRS 1900MHz																																																																																																
	Test Equipment:																																																																																																
	Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T59 Substitution, 4ft SMA Cable Warehouse																																																																																																
	<table border="1"> <thead> <tr> <th>f MHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Cable Loss (dB)</th> <th>Antenna Gain (dBd)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Margin (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td>Low Ch</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>1850.20</td> <td>9.84</td> <td>V</td> <td>0.85</td> <td>7.9</td> <td>16.84</td> <td>33.0</td> <td>-16.2</td> <td></td> </tr> <tr> <td>1850.20</td> <td>22.11</td> <td>H</td> <td>0.85</td> <td>7.9</td> <td>29.11</td> <td>33.0</td> <td>-3.9</td> <td></td> </tr> <tr> <td>Mid Ch</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>1880.00</td> <td>10.43</td> <td>V</td> <td>0.85</td> <td>7.9</td> <td>17.50</td> <td>33.0</td> <td>-15.5</td> <td></td> </tr> <tr> <td>1880.00</td> <td>20.01</td> <td>H</td> <td>0.85</td> <td>7.9</td> <td>27.08</td> <td>33.0</td> <td>-5.9</td> <td></td> </tr> <tr> <td>High Ch</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>1909.80</td> <td>15.72</td> <td>V</td> <td>0.85</td> <td>7.9</td> <td>22.72</td> <td>33.0</td> <td>-10.3</td> <td></td> </tr> <tr> <td>1909.80</td> <td>21.07</td> <td>H</td> <td>0.85</td> <td>7.9</td> <td>28.07</td> <td>33.0</td> <td>-4.9</td> <td></td> </tr> </tbody> </table>								f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes	Low Ch									1850.20	9.84	V	0.85	7.9	16.84	33.0	-16.2		1850.20	22.11	H	0.85	7.9	29.11	33.0	-3.9		Mid Ch									1880.00	10.43	V	0.85	7.9	17.50	33.0	-15.5		1880.00	20.01	H	0.85	7.9	27.08	33.0	-5.9		High Ch									1909.80	15.72	V	0.85	7.9	22.72	33.0	-10.3		1909.80	21.07	H	0.85	7.9	28.07	33.0	-4.9
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Notes																																																																																									
Low Ch																																																																																																	
1850.20	9.84	V	0.85	7.9	16.84	33.0	-16.2																																																																																										
1850.20	22.11	H	0.85	7.9	29.11	33.0	-3.9																																																																																										
Mid Ch																																																																																																	
1880.00	10.43	V	0.85	7.9	17.50	33.0	-15.5																																																																																										
1880.00	20.01	H	0.85	7.9	27.08	33.0	-5.9																																																																																										
High Ch																																																																																																	
1909.80	15.72	V	0.85	7.9	22.72	33.0	-10.3																																																																																										
1909.80	21.07	H	0.85	7.9	28.07	33.0	-4.9																																																																																										
Rev. 3.17.11 Note: For Band 4 EIRP limit is 30dBm																																																																																																	

Band GSM8 50 EGPRS	High Frequency Substitution Measurement UL Verification Services, Inc. Chamber C								
	Company:		LG						
	Project #:		14U17021						
	Date:		03/24/14						
	Test Engineer:		R. Alegre						
	Configuration:		EUT, Y Position						
	Mode:		EGRPS 850MHz						
	Test Equipment:								
	Receiving: Sunol T407, and 3m Chamber N-type Cable (Setup this one for testing EUT)								
	Substitution: Dipole S/N: 00022117, 4ft SMA Cable (SN # 245200 001) Warehouse.								
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
	Low Ch								
	824.20	20.46	V	0.9	0.0	19.56	38.5	-18.9	
	824.20	22.24	H	0.9	0.0	21.34	38.5	-17.1	
	Mid Ch								
	836.60	20.58	V	0.9	0.0	19.68	38.5	-18.8	
	836.60	24.33	H	0.9	0.0	23.43	38.5	-15.0	
	High Ch								
	848.80	20.98	V	0.9	0.0	20.08	38.5	-18.4	
	848.80	24.75	H	0.9	0.0	23.85	38.5	-14.6	
Rev. 3.17.11									
Note: For Band 13/17 ERP limit is 34.77dBm; For Band 26 limit is 50dBm									

Band

GSM8

50

GPRS

High Frequency Substitution Measurement

Compliance Certification Services Chamber C

Company:

Project #:

Date:

Test Engineer:

Configuration:

Mode:

LG

14U17021

03/21/14

R. Alegre

EUT, Y Position

GRPS 850MHz

Test Equipment:

Receiving: Sunol T407, and 3m Chamber N-type Cable (Setup this one for testing EUT)

Substitution: Dipole S/N: 00022117, 4ft SMA Cable (SN # 245200 001) Warehouse.

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Margin (dB)	Notes
Low Ch								
824.20	22.38	V	0.9	0.0	21.48	38.5	-17.0	
824.20	28.15	H	0.9	0.0	27.25	38.5	-11.2	
Mid Ch								
836.60	22.41	V	0.9	0.0	21.51	38.5	-16.9	
836.60	28.86	H	0.9	0.0	27.96	38.5	-10.5	
High Ch								
848.80	23.00	V	0.9	0.0	22.10	38.5	-16.3	
848.80	28.55	H	0.9	0.0	27.65	38.5	-10.8	

Rev. 3.17.11

9.2. FIELD STRENGTH OF SPURIOUS RADIATION**RULE PART(S)**

FCC: §2.1053, §22.917, §24.238

LIMIT

§22.917 (e) and §24.238 (a): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

MODES TESTED**RESULTS**

9.2.1. SPURIOUS RADIATION DATA

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement																		
Company:		LG																
Project #:		14U17021																
Date:		03/27/14																
Test Engineer:		R. Alegre																
Configuration:		EUT with Wireless charger																
Mode:		TX, LTE B17 10MHz 16QAM																
Chamber		Pre-amplifier		Filter		Limit												
3m Chamber C		T145 8449B		Filter 1		Part 22												
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes								
LTE17	Low Ch, (709MHz)																	
10MHz	1.418	-31.3	V	3.0	33.1	1.0	-63.4	-13.0	-50.4									
	2.127	-25.0	V	3.0	31.6	1.0	-55.5	-13.0	-42.5									
	2.836	-24.6	V	3.0	31.0	1.0	-54.6	-13.0	-41.6									
	1.418	-29.8	H	3.0	33.1	1.0	-61.9	-13.0	-48.9									
	2.127	-26.4	H	3.0	31.6	1.0	-57.0	-13.0	-44.0									
	2.836	-25.8	H	3.0	31.0	1.0	-55.9	-13.0	-42.9									
16QAM	Mid Ch, (710MHz)																	
	1.420	-31.1	V	3.0	33.1	1.0	-63.2	-13.0	-50.2									
	2.130	-25.4	V	3.0	31.6	1.0	-56.0	-13.0	-43.0									
	2.840	-24.8	V	3.0	31.0	1.0	-54.9	-13.0	-41.9									
	1.420	-31.1	H	3.0	33.1	1.0	-63.2	-13.0	-50.2									
	2.130	-26.2	H	3.0	31.6	1.0	-56.8	-13.0	-43.8									
	High Ch, (711MHz)																	
	1.422	-31.0	V	3.0	33.1	1.0	-63.1	-13.0	-50.1									
	2.133	-22.6	V	3.0	31.6	1.0	-53.2	-13.0	-40.2									
	2.844	-25.4	V	3.0	31.0	1.0	-55.4	-13.0	-42.4									
	1.422	-31.8	H	3.0	33.1	1.0	-63.8	-13.0	-50.8									
	2.133	-25.6	H	3.0	31.6	1.0	-56.2	-13.0	-43.2									
2.844										-24.6	H	3.0	31.0	1.0	-54.6	-13.0	-41.6	
Rev. 03.03.09																		

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement																																																																																																																																																																																																																																					
Band LTE17 10MH z QPSK	Company:		LG																																																																																																																																																																																																																																		
	Project #:		14U17021																																																																																																																																																																																																																																		
	Date:		03/27/14																																																																																																																																																																																																																																		
	Test Engineer:		R. Alegre																																																																																																																																																																																																																																		
	Configuration:		EUT with Wireless charger																																																																																																																																																																																																																																		
	Mode:		TX, LTE B17 10MHz QPSK																																																																																																																																																																																																																																		
	Chamber		Pre-amplifier		Filter		Limit																																																																																																																																																																																																																														
	3m Chamber C		T145 8449B		Filter 1		Part 22																																																																																																																																																																																																																														
	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>f GHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Distance (m)</th> <th>Preamp (dB)</th> <th>Filter (dB)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr><td colspan="10">Low Ch, (709MHz)</td></tr> <tr><td>1.418</td><td>-30.8</td><td>V</td><td>3.0</td><td>33.1</td><td>1.0</td><td>-62.9</td><td>-13.0</td><td>-49.9</td><td></td></tr> <tr><td>2.127</td><td>-25.3</td><td>V</td><td>3.0</td><td>31.6</td><td>1.0</td><td>-55.9</td><td>-13.0</td><td>-42.9</td><td></td></tr> <tr><td>2.836</td><td>-24.4</td><td>V</td><td>3.0</td><td>31.0</td><td>1.0</td><td>-54.5</td><td>-13.0</td><td>-41.5</td><td></td></tr> <tr><td>1.418</td><td>-30.8</td><td>H</td><td>3.0</td><td>33.1</td><td>1.0</td><td>-62.9</td><td>-13.0</td><td>-49.9</td><td></td></tr> <tr><td>2.127</td><td>-26.1</td><td>H</td><td>3.0</td><td>31.6</td><td>1.0</td><td>-56.7</td><td>-13.0</td><td>-43.7</td><td></td></tr> <tr><td>2.836</td><td>-25.3</td><td>H</td><td>3.0</td><td>31.0</td><td>1.0</td><td>-55.3</td><td>-13.0</td><td>-42.3</td><td></td></tr> <tr><td colspan="10">Mid Ch, (710MHz)</td></tr> <tr><td>1.420</td><td>-31.3</td><td>V</td><td>3.0</td><td>33.1</td><td>1.0</td><td>-63.4</td><td>-13.0</td><td>-50.4</td><td></td></tr> <tr><td>2.130</td><td>-25.4</td><td>V</td><td>3.0</td><td>31.6</td><td>1.0</td><td>-56.0</td><td>-13.0</td><td>-43.0</td><td></td></tr> <tr><td>2.840</td><td>-24.5</td><td>V</td><td>3.0</td><td>31.0</td><td>1.0</td><td>-54.5</td><td>-13.0</td><td>-41.5</td><td></td></tr> <tr><td>1.420</td><td>-31.1</td><td>H</td><td>3.0</td><td>33.1</td><td>1.0</td><td>-63.1</td><td>-13.0</td><td>-50.1</td><td></td></tr> <tr><td>2.130</td><td>-26.2</td><td>H</td><td>3.0</td><td>31.6</td><td>1.0</td><td>-56.8</td><td>-13.0</td><td>-43.8</td><td></td></tr> <tr><td>2.840</td><td>-25.5</td><td>H</td><td>3.0</td><td>31.0</td><td>1.0</td><td>-55.5</td><td>-13.0</td><td>-42.5</td><td></td></tr> <tr><td colspan="10">High Ch, (711MHz)</td></tr> <tr><td>1.422</td><td>-30.3</td><td>V</td><td>3.0</td><td>33.1</td><td>1.0</td><td>-62.4</td><td>-13.0</td><td>-49.4</td><td></td></tr> <tr><td>2.133</td><td>-22.2</td><td>V</td><td>3.0</td><td>31.6</td><td>1.0</td><td>-52.8</td><td>-13.0</td><td>-39.8</td><td></td></tr> <tr><td>2.844</td><td>-24.7</td><td>V</td><td>3.0</td><td>31.0</td><td>1.0</td><td>-54.7</td><td>-13.0</td><td>-41.7</td><td></td></tr> <tr><td>1.422</td><td>-31.3</td><td>H</td><td>3.0</td><td>33.1</td><td>1.0</td><td>-63.3</td><td>-13.0</td><td>-50.3</td><td></td></tr> <tr><td>2.133</td><td>-25.9</td><td>H</td><td>3.0</td><td>31.6</td><td>1.0</td><td>-56.5</td><td>-13.0</td><td>-43.5</td><td></td></tr> <tr><td>2.844</td><td>-25.9</td><td>H</td><td>3.0</td><td>31.0</td><td>1.0</td><td>-56.0</td><td>-13.0</td><td>-43.0</td><td></td></tr> </tbody> </table>										f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch, (709MHz)										1.418	-30.8	V	3.0	33.1	1.0	-62.9	-13.0	-49.9		2.127	-25.3	V	3.0	31.6	1.0	-55.9	-13.0	-42.9		2.836	-24.4	V	3.0	31.0	1.0	-54.5	-13.0	-41.5		1.418	-30.8	H	3.0	33.1	1.0	-62.9	-13.0	-49.9		2.127	-26.1	H	3.0	31.6	1.0	-56.7	-13.0	-43.7		2.836	-25.3	H	3.0	31.0	1.0	-55.3	-13.0	-42.3		Mid Ch, (710MHz)										1.420	-31.3	V	3.0	33.1	1.0	-63.4	-13.0	-50.4		2.130	-25.4	V	3.0	31.6	1.0	-56.0	-13.0	-43.0		2.840	-24.5	V	3.0	31.0	1.0	-54.5	-13.0	-41.5		1.420	-31.1	H	3.0	33.1	1.0	-63.1	-13.0	-50.1		2.130	-26.2	H	3.0	31.6	1.0	-56.8	-13.0	-43.8		2.840	-25.5	H	3.0	31.0	1.0	-55.5	-13.0	-42.5		High Ch, (711MHz)										1.422	-30.3	V	3.0	33.1	1.0	-62.4	-13.0	-49.4		2.133	-22.2	V	3.0	31.6	1.0	-52.8	-13.0	-39.8		2.844	-24.7	V	3.0	31.0	1.0	-54.7	-13.0	-41.7		1.422	-31.3	H	3.0	33.1	1.0	-63.3	-13.0	-50.3		2.133	-25.9	H	3.0	31.6	1.0	-56.5	-13.0	-43.5		2.844	-25.9	H	3.0	31.0	1.0	-56.0	-13.0	-43.0
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																																																																																																																																																												
Low Ch, (709MHz)																																																																																																																																																																																																																																					
1.418	-30.8	V	3.0	33.1	1.0	-62.9	-13.0	-49.9																																																																																																																																																																																																																													
2.127	-25.3	V	3.0	31.6	1.0	-55.9	-13.0	-42.9																																																																																																																																																																																																																													
2.836	-24.4	V	3.0	31.0	1.0	-54.5	-13.0	-41.5																																																																																																																																																																																																																													
1.418	-30.8	H	3.0	33.1	1.0	-62.9	-13.0	-49.9																																																																																																																																																																																																																													
2.127	-26.1	H	3.0	31.6	1.0	-56.7	-13.0	-43.7																																																																																																																																																																																																																													
2.836	-25.3	H	3.0	31.0	1.0	-55.3	-13.0	-42.3																																																																																																																																																																																																																													
Mid Ch, (710MHz)																																																																																																																																																																																																																																					
1.420	-31.3	V	3.0	33.1	1.0	-63.4	-13.0	-50.4																																																																																																																																																																																																																													
2.130	-25.4	V	3.0	31.6	1.0	-56.0	-13.0	-43.0																																																																																																																																																																																																																													
2.840	-24.5	V	3.0	31.0	1.0	-54.5	-13.0	-41.5																																																																																																																																																																																																																													
1.420	-31.1	H	3.0	33.1	1.0	-63.1	-13.0	-50.1																																																																																																																																																																																																																													
2.130	-26.2	H	3.0	31.6	1.0	-56.8	-13.0	-43.8																																																																																																																																																																																																																													
2.840	-25.5	H	3.0	31.0	1.0	-55.5	-13.0	-42.5																																																																																																																																																																																																																													
High Ch, (711MHz)																																																																																																																																																																																																																																					
1.422	-30.3	V	3.0	33.1	1.0	-62.4	-13.0	-49.4																																																																																																																																																																																																																													
2.133	-22.2	V	3.0	31.6	1.0	-52.8	-13.0	-39.8																																																																																																																																																																																																																													
2.844	-24.7	V	3.0	31.0	1.0	-54.7	-13.0	-41.7																																																																																																																																																																																																																													
1.422	-31.3	H	3.0	33.1	1.0	-63.3	-13.0	-50.3																																																																																																																																																																																																																													
2.133	-25.9	H	3.0	31.6	1.0	-56.5	-13.0	-43.5																																																																																																																																																																																																																													
2.844	-25.9	H	3.0	31.0	1.0	-56.0	-13.0	-43.0																																																																																																																																																																																																																													
Rev. 03.03.09																																																																																																																																																																																																																																					

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement																																																																																																																																																																																																																																					
Band LTE17 5MHz 16QAM	Company:		LG																																																																																																																																																																																																																																		
	Project #:		14U17021																																																																																																																																																																																																																																		
	Date:		03/27/14																																																																																																																																																																																																																																		
	Test Engineer:		R. Alegre																																																																																																																																																																																																																																		
	Configuration:		EUT with Wireless charger																																																																																																																																																																																																																																		
	Mode:		TX, LTE B17 5MHz har 16QAM																																																																																																																																																																																																																																		
	Chamber		Pre-amplifier		Filter		Limit																																																																																																																																																																																																																														
	3m Chamber C		T145 8449B		Filter 1		Part 22																																																																																																																																																																																																																														
	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>f GHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Distance (m)</th> <th>Preamplifier (dB)</th> <th>Filter (dB)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr><td colspan="10">Low Ch, (706.5MHz)</td></tr> <tr><td>1.413</td><td>-30.7</td><td>V</td><td>3.0</td><td>33.1</td><td>1.0</td><td>-62.8</td><td>-13.0</td><td>-49.8</td><td></td></tr> <tr><td>2.120</td><td>-25.4</td><td>V</td><td>3.0</td><td>31.6</td><td>1.0</td><td>-56.0</td><td>-13.0</td><td>-43.0</td><td></td></tr> <tr><td>2.826</td><td>-25.3</td><td>V</td><td>3.0</td><td>31.0</td><td>1.0</td><td>-55.3</td><td>-13.0</td><td>-42.3</td><td></td></tr> <tr><td>1.413</td><td>-31.2</td><td>H</td><td>3.0</td><td>33.1</td><td>1.0</td><td>-63.3</td><td>-13.0</td><td>-50.3</td><td></td></tr> <tr><td>2.120</td><td>-27.3</td><td>H</td><td>3.0</td><td>31.6</td><td>1.0</td><td>-57.9</td><td>-13.0</td><td>-44.9</td><td></td></tr> <tr><td>2.826</td><td>-26.0</td><td>H</td><td>3.0</td><td>31.0</td><td>1.0</td><td>-56.0</td><td>-13.0</td><td>-43.0</td><td></td></tr> <tr><td colspan="10">Mid Ch, (710MHz)</td></tr> <tr><td>1.420</td><td>-31.4</td><td>V</td><td>3.0</td><td>33.1</td><td>1.0</td><td>-63.4</td><td>-13.0</td><td>-50.4</td><td></td></tr> <tr><td>2.130</td><td>-25.5</td><td>V</td><td>3.0</td><td>31.6</td><td>1.0</td><td>-56.1</td><td>-13.0</td><td>-43.1</td><td></td></tr> <tr><td>2.840</td><td>-24.8</td><td>V</td><td>3.0</td><td>31.0</td><td>1.0</td><td>-54.8</td><td>-13.0</td><td>-41.8</td><td></td></tr> <tr><td>1.420</td><td>-30.5</td><td>H</td><td>3.0</td><td>33.1</td><td>1.0</td><td>-62.6</td><td>-13.0</td><td>-49.6</td><td></td></tr> <tr><td>2.130</td><td>-26.4</td><td>H</td><td>3.0</td><td>31.6</td><td>1.0</td><td>-57.0</td><td>-13.0</td><td>-44.0</td><td></td></tr> <tr><td>2.840</td><td>-26.1</td><td>H</td><td>3.0</td><td>31.0</td><td>1.0</td><td>-56.1</td><td>-13.0</td><td>-43.1</td><td></td></tr> <tr><td colspan="10">High Ch, (713.5MHz)</td></tr> <tr><td>1.427</td><td>-31.3</td><td>V</td><td>3.0</td><td>33.1</td><td>1.0</td><td>-63.4</td><td>-13.0</td><td>-50.4</td><td></td></tr> <tr><td>2.141</td><td>-24.6</td><td>V</td><td>3.0</td><td>31.6</td><td>1.0</td><td>-55.2</td><td>-13.0</td><td>-42.2</td><td></td></tr> <tr><td>2.854</td><td>-24.6</td><td>V</td><td>3.0</td><td>31.0</td><td>1.0</td><td>-54.6</td><td>-13.0</td><td>-41.6</td><td></td></tr> <tr><td>1.427</td><td>-30.8</td><td>H</td><td>3.0</td><td>33.1</td><td>1.0</td><td>-62.9</td><td>-13.0</td><td>-49.9</td><td></td></tr> <tr><td>2.141</td><td>-24.3</td><td>H</td><td>3.0</td><td>31.6</td><td>1.0</td><td>-54.8</td><td>-13.0</td><td>-41.8</td><td></td></tr> <tr><td>2.854</td><td>-25.5</td><td>H</td><td>3.0</td><td>31.0</td><td>1.0</td><td>-55.5</td><td>-13.0</td><td>-42.5</td><td></td></tr> </tbody> </table>										f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamplifier (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch, (706.5MHz)										1.413	-30.7	V	3.0	33.1	1.0	-62.8	-13.0	-49.8		2.120	-25.4	V	3.0	31.6	1.0	-56.0	-13.0	-43.0		2.826	-25.3	V	3.0	31.0	1.0	-55.3	-13.0	-42.3		1.413	-31.2	H	3.0	33.1	1.0	-63.3	-13.0	-50.3		2.120	-27.3	H	3.0	31.6	1.0	-57.9	-13.0	-44.9		2.826	-26.0	H	3.0	31.0	1.0	-56.0	-13.0	-43.0		Mid Ch, (710MHz)										1.420	-31.4	V	3.0	33.1	1.0	-63.4	-13.0	-50.4		2.130	-25.5	V	3.0	31.6	1.0	-56.1	-13.0	-43.1		2.840	-24.8	V	3.0	31.0	1.0	-54.8	-13.0	-41.8		1.420	-30.5	H	3.0	33.1	1.0	-62.6	-13.0	-49.6		2.130	-26.4	H	3.0	31.6	1.0	-57.0	-13.0	-44.0		2.840	-26.1	H	3.0	31.0	1.0	-56.1	-13.0	-43.1		High Ch, (713.5MHz)										1.427	-31.3	V	3.0	33.1	1.0	-63.4	-13.0	-50.4		2.141	-24.6	V	3.0	31.6	1.0	-55.2	-13.0	-42.2		2.854	-24.6	V	3.0	31.0	1.0	-54.6	-13.0	-41.6		1.427	-30.8	H	3.0	33.1	1.0	-62.9	-13.0	-49.9		2.141	-24.3	H	3.0	31.6	1.0	-54.8	-13.0	-41.8		2.854	-25.5	H	3.0	31.0	1.0	-55.5	-13.0	-42.5
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamplifier (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																																																																																																																																																												
Low Ch, (706.5MHz)																																																																																																																																																																																																																																					
1.413	-30.7	V	3.0	33.1	1.0	-62.8	-13.0	-49.8																																																																																																																																																																																																																													
2.120	-25.4	V	3.0	31.6	1.0	-56.0	-13.0	-43.0																																																																																																																																																																																																																													
2.826	-25.3	V	3.0	31.0	1.0	-55.3	-13.0	-42.3																																																																																																																																																																																																																													
1.413	-31.2	H	3.0	33.1	1.0	-63.3	-13.0	-50.3																																																																																																																																																																																																																													
2.120	-27.3	H	3.0	31.6	1.0	-57.9	-13.0	-44.9																																																																																																																																																																																																																													
2.826	-26.0	H	3.0	31.0	1.0	-56.0	-13.0	-43.0																																																																																																																																																																																																																													
Mid Ch, (710MHz)																																																																																																																																																																																																																																					
1.420	-31.4	V	3.0	33.1	1.0	-63.4	-13.0	-50.4																																																																																																																																																																																																																													
2.130	-25.5	V	3.0	31.6	1.0	-56.1	-13.0	-43.1																																																																																																																																																																																																																													
2.840	-24.8	V	3.0	31.0	1.0	-54.8	-13.0	-41.8																																																																																																																																																																																																																													
1.420	-30.5	H	3.0	33.1	1.0	-62.6	-13.0	-49.6																																																																																																																																																																																																																													
2.130	-26.4	H	3.0	31.6	1.0	-57.0	-13.0	-44.0																																																																																																																																																																																																																													
2.840	-26.1	H	3.0	31.0	1.0	-56.1	-13.0	-43.1																																																																																																																																																																																																																													
High Ch, (713.5MHz)																																																																																																																																																																																																																																					
1.427	-31.3	V	3.0	33.1	1.0	-63.4	-13.0	-50.4																																																																																																																																																																																																																													
2.141	-24.6	V	3.0	31.6	1.0	-55.2	-13.0	-42.2																																																																																																																																																																																																																													
2.854	-24.6	V	3.0	31.0	1.0	-54.6	-13.0	-41.6																																																																																																																																																																																																																													
1.427	-30.8	H	3.0	33.1	1.0	-62.9	-13.0	-49.9																																																																																																																																																																																																																													
2.141	-24.3	H	3.0	31.6	1.0	-54.8	-13.0	-41.8																																																																																																																																																																																																																													
2.854	-25.5	H	3.0	31.0	1.0	-55.5	-13.0	-42.5																																																																																																																																																																																																																													
Rev. 03.03.09																																																																																																																																																																																																																																					

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement																																																																																																																																																																																																																																					
Band LTE17 5MHz QPSK	Company: LG																																																																																																																																																																																																																																				
	Project #: 14U17021																																																																																																																																																																																																																																				
	Date: 03/27/14																																																																																																																																																																																																																																				
	Test Engineer: R. Alegre																																																																																																																																																																																																																																				
	Configuration: EUT with Wireless charger																																																																																																																																																																																																																																				
	Mode: TX, LTE B17 5MHz har QPSK																																																																																																																																																																																																																																				
	Chamber		Pre-amplifier		Filter		Limit																																																																																																																																																																																																																														
	3m Chamber C		T145 8449B		Filter 1		Part 22																																																																																																																																																																																																																														
	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>f GHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Distance (m)</th> <th>Preamp (dB)</th> <th>Filter (dB)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr><td colspan="10">Low Ch, (706.5MHz)</td></tr> <tr><td>1.413</td><td>-30.4</td><td>V</td><td>3.0</td><td>33.1</td><td>1.0</td><td>-62.4</td><td>-13.0</td><td>-49.4</td><td></td></tr> <tr><td>2.120</td><td>-24.8</td><td>V</td><td>3.0</td><td>31.6</td><td>1.0</td><td>-55.4</td><td>-13.0</td><td>-42.4</td><td></td></tr> <tr><td>2.826</td><td>-24.7</td><td>V</td><td>3.0</td><td>31.0</td><td>1.0</td><td>-54.8</td><td>-13.0</td><td>-41.8</td><td></td></tr> <tr><td>1.413</td><td>-31.9</td><td>H</td><td>3.0</td><td>33.1</td><td>1.0</td><td>-64.0</td><td>-13.0</td><td>-51.0</td><td></td></tr> <tr><td>2.120</td><td>-27.1</td><td>H</td><td>3.0</td><td>31.6</td><td>1.0</td><td>-57.7</td><td>-13.0</td><td>-44.7</td><td></td></tr> <tr><td>2.826</td><td>-25.5</td><td>H</td><td>3.0</td><td>31.0</td><td>1.0</td><td>-55.5</td><td>-13.0</td><td>-42.5</td><td></td></tr> <tr><td colspan="10">Mid Ch, (710MHz)</td></tr> <tr><td>1.420</td><td>-29.9</td><td>V</td><td>3.0</td><td>33.1</td><td>1.0</td><td>-62.0</td><td>-13.0</td><td>-49.0</td><td></td></tr> <tr><td>2.130</td><td>-25.3</td><td>V</td><td>3.0</td><td>31.6</td><td>1.0</td><td>-55.9</td><td>-13.0</td><td>-42.9</td><td></td></tr> <tr><td>2.840</td><td>-24.6</td><td>V</td><td>3.0</td><td>31.0</td><td>1.0</td><td>-54.6</td><td>-13.0</td><td>-41.6</td><td></td></tr> <tr><td>1.420</td><td>-30.6</td><td>H</td><td>3.0</td><td>33.1</td><td>1.0</td><td>-62.7</td><td>-13.0</td><td>-49.7</td><td></td></tr> <tr><td>2.130</td><td>-26.5</td><td>H</td><td>3.0</td><td>31.6</td><td>1.0</td><td>-57.1</td><td>-13.0</td><td>-44.1</td><td></td></tr> <tr><td>2.840</td><td>-25.5</td><td>H</td><td>3.0</td><td>31.0</td><td>1.0</td><td>-55.6</td><td>-13.0</td><td>-42.6</td><td></td></tr> <tr><td colspan="10">High Ch, (713.5MHz)</td></tr> <tr><td>1.427</td><td>-31.2</td><td>V</td><td>3.0</td><td>33.1</td><td>1.0</td><td>-63.3</td><td>-13.0</td><td>-50.3</td><td></td></tr> <tr><td>2.141</td><td>-24.3</td><td>V</td><td>3.0</td><td>31.6</td><td>1.0</td><td>-54.8</td><td>-13.0</td><td>-41.8</td><td></td></tr> <tr><td>2.854</td><td>-24.4</td><td>V</td><td>3.0</td><td>31.0</td><td>1.0</td><td>-54.4</td><td>-13.0</td><td>-41.4</td><td></td></tr> <tr><td>1.427</td><td>-30.5</td><td>H</td><td>3.0</td><td>33.1</td><td>1.0</td><td>-62.5</td><td>-13.0</td><td>-49.5</td><td></td></tr> <tr><td>2.141</td><td>-24.2</td><td>H</td><td>3.0</td><td>31.6</td><td>1.0</td><td>-54.7</td><td>-13.0</td><td>-41.7</td><td></td></tr> <tr><td>2.854</td><td>-25.5</td><td>H</td><td>3.0</td><td>31.0</td><td>1.0</td><td>-55.5</td><td>-13.0</td><td>-42.5</td><td></td></tr> </tbody> </table>										f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch, (706.5MHz)										1.413	-30.4	V	3.0	33.1	1.0	-62.4	-13.0	-49.4		2.120	-24.8	V	3.0	31.6	1.0	-55.4	-13.0	-42.4		2.826	-24.7	V	3.0	31.0	1.0	-54.8	-13.0	-41.8		1.413	-31.9	H	3.0	33.1	1.0	-64.0	-13.0	-51.0		2.120	-27.1	H	3.0	31.6	1.0	-57.7	-13.0	-44.7		2.826	-25.5	H	3.0	31.0	1.0	-55.5	-13.0	-42.5		Mid Ch, (710MHz)										1.420	-29.9	V	3.0	33.1	1.0	-62.0	-13.0	-49.0		2.130	-25.3	V	3.0	31.6	1.0	-55.9	-13.0	-42.9		2.840	-24.6	V	3.0	31.0	1.0	-54.6	-13.0	-41.6		1.420	-30.6	H	3.0	33.1	1.0	-62.7	-13.0	-49.7		2.130	-26.5	H	3.0	31.6	1.0	-57.1	-13.0	-44.1		2.840	-25.5	H	3.0	31.0	1.0	-55.6	-13.0	-42.6		High Ch, (713.5MHz)										1.427	-31.2	V	3.0	33.1	1.0	-63.3	-13.0	-50.3		2.141	-24.3	V	3.0	31.6	1.0	-54.8	-13.0	-41.8		2.854	-24.4	V	3.0	31.0	1.0	-54.4	-13.0	-41.4		1.427	-30.5	H	3.0	33.1	1.0	-62.5	-13.0	-49.5		2.141	-24.2	H	3.0	31.6	1.0	-54.7	-13.0	-41.7		2.854	-25.5	H	3.0	31.0	1.0	-55.5	-13.0	-42.5
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																																																																																																																																																												
Low Ch, (706.5MHz)																																																																																																																																																																																																																																					
1.413	-30.4	V	3.0	33.1	1.0	-62.4	-13.0	-49.4																																																																																																																																																																																																																													
2.120	-24.8	V	3.0	31.6	1.0	-55.4	-13.0	-42.4																																																																																																																																																																																																																													
2.826	-24.7	V	3.0	31.0	1.0	-54.8	-13.0	-41.8																																																																																																																																																																																																																													
1.413	-31.9	H	3.0	33.1	1.0	-64.0	-13.0	-51.0																																																																																																																																																																																																																													
2.120	-27.1	H	3.0	31.6	1.0	-57.7	-13.0	-44.7																																																																																																																																																																																																																													
2.826	-25.5	H	3.0	31.0	1.0	-55.5	-13.0	-42.5																																																																																																																																																																																																																													
Mid Ch, (710MHz)																																																																																																																																																																																																																																					
1.420	-29.9	V	3.0	33.1	1.0	-62.0	-13.0	-49.0																																																																																																																																																																																																																													
2.130	-25.3	V	3.0	31.6	1.0	-55.9	-13.0	-42.9																																																																																																																																																																																																																													
2.840	-24.6	V	3.0	31.0	1.0	-54.6	-13.0	-41.6																																																																																																																																																																																																																													
1.420	-30.6	H	3.0	33.1	1.0	-62.7	-13.0	-49.7																																																																																																																																																																																																																													
2.130	-26.5	H	3.0	31.6	1.0	-57.1	-13.0	-44.1																																																																																																																																																																																																																													
2.840	-25.5	H	3.0	31.0	1.0	-55.6	-13.0	-42.6																																																																																																																																																																																																																													
High Ch, (713.5MHz)																																																																																																																																																																																																																																					
1.427	-31.2	V	3.0	33.1	1.0	-63.3	-13.0	-50.3																																																																																																																																																																																																																													
2.141	-24.3	V	3.0	31.6	1.0	-54.8	-13.0	-41.8																																																																																																																																																																																																																													
2.854	-24.4	V	3.0	31.0	1.0	-54.4	-13.0	-41.4																																																																																																																																																																																																																													
1.427	-30.5	H	3.0	33.1	1.0	-62.5	-13.0	-49.5																																																																																																																																																																																																																													
2.141	-24.2	H	3.0	31.6	1.0	-54.7	-13.0	-41.7																																																																																																																																																																																																																													
2.854	-25.5	H	3.0	31.0	1.0	-55.5	-13.0	-42.5																																																																																																																																																																																																																													
Rev. 03.03.09																																																																																																																																																																																																																																					

Compliance Certification Services
Above 1GHz High Frequency Substitution Measurement

Company: LG
Project #: 14U17021
Date: 03/27/14
Test Engineer: R. Alegre
Configuration: EUT with Wireless charger
Mode: TX, LTE band 4, 10MHz BW, 16QAM

Chamber

3m Chamber

Pre-amplifier

T145 8449B

Filter

Filter 1

Limit

Part 24

f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch. (1715 MHz)									
3.430	-22.2	V	3.0	30.4	1.0	-51.7	-13.0	-38.7	
5.145	-19.3	V	3.0	28.8	1.0	-47.1	-13.0	-34.1	
6.860	-15.9	V	3.0	27.1	1.0	-42.0	-13.0	-29.0	
3.430	-22.8	H	3.0	30.4	1.0	-52.2	-13.0	-39.2	
5.145	-19.3	H	3.0	28.8	1.0	-47.1	-13.0	-34.1	
6.860	-15.5	H	3.0	27.1	1.0	-41.6	-13.0	-28.6	
Mid Ch. (1732.5 MHz)									
3.465	-23.1	V	3.0	30.4	1.0	-52.5	-13.0	-39.5	
5.198	-19.3	V	3.0	28.7	1.0	-47.0	-13.0	-34.0	
6.930	-16.8	V	3.0	27.1	1.0	-42.9	-13.0	-29.9	
3.465	-23.5	H	3.0	30.4	1.0	-52.9	-13.0	-39.9	
5.198	-20.1	H	3.0	28.7	1.0	-47.8	-13.0	-34.8	
6.930	-15.8	H	3.0	27.1	1.0	-41.8	-13.0	-28.8	
High Ch. (1750 MHz)									
3.500	-22.9	V	3.0	30.4	1.0	-52.3	-13.0	-39.3	
5.250	-19.7	V	3.0	28.7	1.0	-47.4	-13.0	-34.4	
7.000	-15.4	V	3.0	27.0	1.0	-41.4	-13.0	-28.4	
3.500	-21.4	H	3.0	30.4	1.0	-50.8	-13.0	-37.8	
5.250	-19.2	H	3.0	28.7	1.0	-46.8	-13.0	-33.8	
7.000	-14.8	H	3.0	27.0	1.0	-40.8	-13.0	-27.8	

Rev. 03.03.09

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement																																																																																																																																																																																																																																					
Band LTE4 5MHz 16QAM	Company:		LG																																																																																																																																																																																																																																		
	Project #:		14U17021																																																																																																																																																																																																																																		
	Date:		03/27/14																																																																																																																																																																																																																																		
	Test Engineer:		R. Alegre																																																																																																																																																																																																																																		
	Configuration:		EUT with Wireless charger																																																																																																																																																																																																																																		
	Mode:		TX, LTE band 4, 5MHz BW, 16 QAM																																																																																																																																																																																																																																		
	Chamber		Pre-amplifier		Filter		Limit																																																																																																																																																																																																																														
	3m Chamber		T145 8449B		Filter 1		Part 24																																																																																																																																																																																																																														
	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>f GHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Distance (m)</th> <th>Preamp (dB)</th> <th>Filter (dB)</th> <th>ERP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch, (1712.5 MHz)</td> </tr> <tr> <td>3.425</td> <td>-23.9</td> <td>V</td> <td>3.0</td> <td>30.4</td> <td>1.0</td> <td>-53.3</td> <td>-13.0</td> <td>-40.3</td> <td></td> </tr> <tr> <td>5.137</td> <td>-20.6</td> <td>V</td> <td>3.0</td> <td>28.8</td> <td>1.0</td> <td>-48.3</td> <td>-13.0</td> <td>-35.3</td> <td></td> </tr> <tr> <td>6.850</td> <td>-16.5</td> <td>V</td> <td>3.0</td> <td>27.1</td> <td>1.0</td> <td>-42.7</td> <td>-13.0</td> <td>-29.7</td> <td></td> </tr> <tr> <td>3.425</td> <td>-22.4</td> <td>H</td> <td>3.0</td> <td>30.4</td> <td>1.0</td> <td>-51.8</td> <td>-13.0</td> <td>-38.8</td> <td></td> </tr> <tr> <td>5.137</td> <td>-20.1</td> <td>H</td> <td>3.0</td> <td>28.8</td> <td>1.0</td> <td>-47.8</td> <td>-13.0</td> <td>-34.8</td> <td></td> </tr> <tr> <td>6.850</td> <td>-16.3</td> <td>H</td> <td>3.0</td> <td>27.1</td> <td>1.0</td> <td>-42.5</td> <td>-13.0</td> <td>-29.5</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch, (1732.5 MHz)</td> </tr> <tr> <td>3.465</td> <td>-23.0</td> <td>V</td> <td>3.0</td> <td>30.4</td> <td>1.0</td> <td>-52.4</td> <td>-13.0</td> <td>-39.4</td> <td></td> </tr> <tr> <td>5.197</td> <td>-20.3</td> <td>V</td> <td>3.0</td> <td>28.7</td> <td>1.0</td> <td>-48.0</td> <td>-13.0</td> <td>-35.0</td> <td></td> </tr> <tr> <td>6.930</td> <td>-17.2</td> <td>V</td> <td>3.0</td> <td>27.1</td> <td>1.0</td> <td>-43.2</td> <td>-13.0</td> <td>-30.2</td> <td></td> </tr> <tr> <td>3.465</td> <td>-22.6</td> <td>H</td> <td>3.0</td> <td>30.4</td> <td>1.0</td> <td>-52.0</td> <td>-13.0</td> <td>-39.0</td> <td></td> </tr> <tr> <td>5.197</td> <td>-20.2</td> <td>H</td> <td>3.0</td> <td>28.7</td> <td>1.0</td> <td>-47.9</td> <td>-13.0</td> <td>-34.9</td> <td></td> </tr> <tr> <td>6.930</td> <td>-16.2</td> <td>H</td> <td>3.0</td> <td>27.1</td> <td>1.0</td> <td>-42.2</td> <td>-13.0</td> <td>-29.2</td> <td></td> </tr> <tr> <td colspan="10">High Ch, (1752.5 MHz)</td> </tr> <tr> <td>3.505</td> <td>-24.0</td> <td>V</td> <td>3.0</td> <td>30.4</td> <td>1.0</td> <td>-53.4</td> <td>-13.0</td> <td>-40.4</td> <td></td> </tr> <tr> <td>5.257</td> <td>-20.7</td> <td>V</td> <td>3.0</td> <td>28.6</td> <td>1.0</td> <td>-48.3</td> <td>-13.0</td> <td>-35.3</td> <td></td> </tr> <tr> <td>7.010</td> <td>-16.6</td> <td>V</td> <td>3.0</td> <td>27.0</td> <td>1.0</td> <td>-42.6</td> <td>-13.0</td> <td>-29.6</td> <td></td> </tr> <tr> <td>3.505</td> <td>-22.8</td> <td>H</td> <td>3.0</td> <td>30.4</td> <td>1.0</td> <td>-52.1</td> <td>-13.0</td> <td>-39.1</td> <td></td> </tr> <tr> <td>5.257</td> <td>-18.8</td> <td>H</td> <td>3.0</td> <td>28.6</td> <td>1.0</td> <td>-46.4</td> <td>-13.0</td> <td>-33.4</td> <td></td> </tr> <tr> <td>7.010</td> <td>-15.5</td> <td>H</td> <td>3.0</td> <td>27.0</td> <td>1.0</td> <td>-41.5</td> <td>-13.0</td> <td>-28.5</td> <td></td> </tr> </tbody> </table>										f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch, (1712.5 MHz)										3.425	-23.9	V	3.0	30.4	1.0	-53.3	-13.0	-40.3		5.137	-20.6	V	3.0	28.8	1.0	-48.3	-13.0	-35.3		6.850	-16.5	V	3.0	27.1	1.0	-42.7	-13.0	-29.7		3.425	-22.4	H	3.0	30.4	1.0	-51.8	-13.0	-38.8		5.137	-20.1	H	3.0	28.8	1.0	-47.8	-13.0	-34.8		6.850	-16.3	H	3.0	27.1	1.0	-42.5	-13.0	-29.5		Mid Ch, (1732.5 MHz)										3.465	-23.0	V	3.0	30.4	1.0	-52.4	-13.0	-39.4		5.197	-20.3	V	3.0	28.7	1.0	-48.0	-13.0	-35.0		6.930	-17.2	V	3.0	27.1	1.0	-43.2	-13.0	-30.2		3.465	-22.6	H	3.0	30.4	1.0	-52.0	-13.0	-39.0		5.197	-20.2	H	3.0	28.7	1.0	-47.9	-13.0	-34.9		6.930	-16.2	H	3.0	27.1	1.0	-42.2	-13.0	-29.2		High Ch, (1752.5 MHz)										3.505	-24.0	V	3.0	30.4	1.0	-53.4	-13.0	-40.4		5.257	-20.7	V	3.0	28.6	1.0	-48.3	-13.0	-35.3		7.010	-16.6	V	3.0	27.0	1.0	-42.6	-13.0	-29.6		3.505	-22.8	H	3.0	30.4	1.0	-52.1	-13.0	-39.1		5.257	-18.8	H	3.0	28.6	1.0	-46.4	-13.0	-33.4		7.010	-15.5	H	3.0	27.0	1.0	-41.5	-13.0	-28.5
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																																																																																																																																																												
Low Ch, (1712.5 MHz)																																																																																																																																																																																																																																					
3.425	-23.9	V	3.0	30.4	1.0	-53.3	-13.0	-40.3																																																																																																																																																																																																																													
5.137	-20.6	V	3.0	28.8	1.0	-48.3	-13.0	-35.3																																																																																																																																																																																																																													
6.850	-16.5	V	3.0	27.1	1.0	-42.7	-13.0	-29.7																																																																																																																																																																																																																													
3.425	-22.4	H	3.0	30.4	1.0	-51.8	-13.0	-38.8																																																																																																																																																																																																																													
5.137	-20.1	H	3.0	28.8	1.0	-47.8	-13.0	-34.8																																																																																																																																																																																																																													
6.850	-16.3	H	3.0	27.1	1.0	-42.5	-13.0	-29.5																																																																																																																																																																																																																													
Mid Ch, (1732.5 MHz)																																																																																																																																																																																																																																					
3.465	-23.0	V	3.0	30.4	1.0	-52.4	-13.0	-39.4																																																																																																																																																																																																																													
5.197	-20.3	V	3.0	28.7	1.0	-48.0	-13.0	-35.0																																																																																																																																																																																																																													
6.930	-17.2	V	3.0	27.1	1.0	-43.2	-13.0	-30.2																																																																																																																																																																																																																													
3.465	-22.6	H	3.0	30.4	1.0	-52.0	-13.0	-39.0																																																																																																																																																																																																																													
5.197	-20.2	H	3.0	28.7	1.0	-47.9	-13.0	-34.9																																																																																																																																																																																																																													
6.930	-16.2	H	3.0	27.1	1.0	-42.2	-13.0	-29.2																																																																																																																																																																																																																													
High Ch, (1752.5 MHz)																																																																																																																																																																																																																																					
3.505	-24.0	V	3.0	30.4	1.0	-53.4	-13.0	-40.4																																																																																																																																																																																																																													
5.257	-20.7	V	3.0	28.6	1.0	-48.3	-13.0	-35.3																																																																																																																																																																																																																													
7.010	-16.6	V	3.0	27.0	1.0	-42.6	-13.0	-29.6																																																																																																																																																																																																																													
3.505	-22.8	H	3.0	30.4	1.0	-52.1	-13.0	-39.1																																																																																																																																																																																																																													
5.257	-18.8	H	3.0	28.6	1.0	-46.4	-13.0	-33.4																																																																																																																																																																																																																													
7.010	-15.5	H	3.0	27.0	1.0	-41.5	-13.0	-28.5																																																																																																																																																																																																																													
Rev. 03.03.09																																																																																																																																																																																																																																					

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
Band	Company:		LG							
	Project #:		14U17021							
	Date:		03/27/14							
	Test Engineer:		R. Alegre							
	Configuration:		EUT with Wireless charger							
	Mode:		TX, LTE band 4, 5MHz BW, QPSK							
	Chamber		Pre-amplifier		Filter		Limit			
	3m Chamber		T145 8449B		Filter 1		Part 24			
		f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)
LTE4 5MHz QPSK	Low Ch, (1712.5 MHz)									
	3.425	-22.6	V	3.0	30.4	1.0	-52.1	-13.0	-39.1	
	5.137	-20.0	V	3.0	28.8	1.0	-47.7	-13.0	-34.7	
	6.850	-17.3	V	3.0	27.1	1.0	-43.4	-13.0	-30.4	
	3.425	-23.3	H	3.0	30.4	1.0	-52.7	-13.0	-39.7	
	5.137	-19.7	H	3.0	28.8	1.0	-47.5	-13.0	-34.5	
	6.850	-15.6	H	3.0	27.1	1.0	-41.7	-13.0	-28.7	
	Mid Ch, (1732.5 MHz)									
	3.465	-22.6	V	3.0	30.4	1.0	-52.0	-13.0	-39.0	
	5.197	-19.8	V	3.0	28.7	1.0	-47.5	-13.0	-34.5	
	6.930	-16.5	V	3.0	27.1	1.0	-42.6	-13.0	-29.6	
	3.465	-22.7	H	3.0	30.4	1.0	-52.1	-13.0	-39.1	
	5.197	-19.4	H	3.0	28.7	1.0	-47.1	-13.0	-34.1	
	6.930	-15.8	H	3.0	27.1	1.0	-41.8	-13.0	-28.8	
	High Ch, (1752.5 MHz)									
	3.505	-23.2	V	3.0	30.4	1.0	-52.6	-13.0	-39.6	
	5.257	-20.5	V	3.0	28.6	1.0	-48.1	-13.0	-35.1	
	7.010	-16.1	V	3.0	27.0	1.0	-42.1	-13.0	-29.1	
	3.505	-22.2	H	3.0	30.4	1.0	-51.6	-13.0	-38.6	
	5.257	-19.3	H	3.0	28.6	1.0	-46.9	-13.0	-33.9	
7.010	-15.0	H	3.0	27.0	1.0	-40.9	-13.0	-27.9		
Rev. 03.03.09										

Compliance Certification Services
Above 1GHz High Frequency Substitution Measurement

Company: LG
Project #: 14U17021
Date: 03/27/14
Test Engineer: R. Alegre
Configuration: EUT with Wireless charger
Mode: Tx, 1900MHz HSDPA

Chamber

Pre-amplifier

Filter

Limit

3m Chamber

T34 8449B

Filter 1

Part 24

Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
HSDPA	Low Ch, 1852.4MHz									
	3.705	-22.0	V	3.0	35.4	1.0	-56.4	-13.0	-43.4	
	5.557	-19.5	V	3.0	34.7	1.0	-53.2	-13.0	-40.2	
	7.409	-10.4	V	3.0	34.9	1.0	-44.3	-13.0	-31.3	
	3.705	-23.3	H	3.0	35.4	1.0	-57.7	-13.0	-44.7	
	5.557	-18.5	H	3.0	34.7	1.0	-52.2	-13.0	-39.2	
	7.409	-14.5	H	3.0	34.9	1.0	-48.4	-13.0	-35.4	
	Mid Ch, 1880MHz									
	3.760	-22.9	V	3.0	35.3	1.0	-57.2	-13.0	-44.2	
	5.640	-19.5	V	3.0	34.7	1.0	-53.3	-13.0	-40.3	
	7.520	-13.0	V	3.0	34.9	1.0	-46.9	-13.0	-33.9	
	3.760	-23.4	H	3.0	35.3	1.0	-57.7	-13.0	-44.7	
	5.640	-18.7	H	3.0	34.7	1.0	-52.4	-13.0	-39.4	
	7.520	-15.3	H	3.0	34.9	1.0	-49.2	-13.0	-36.2	
	High Ch, 1907.6MHz									
	3.815	-22.6	V	3.0	35.3	1.0	-56.9	-13.0	-43.9	
	5.723	-19.4	V	3.0	34.7	1.0	-53.1	-13.0	-40.1	
	7.630	-8.8	V	3.0	34.9	1.0	-42.8	-13.0	-29.8	
3.815	-22.7	H	3.0	35.3	1.0	-57.0	-13.0	-44.0		
5.723	-18.6	H	3.0	34.7	1.0	-52.4	-13.0	-39.4		
7.630	-14.3	H	3.0	34.9	1.0	-48.3	-13.0	-35.3		

Rev. 03.03.09

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement																																																																																																																																																																																																																																					
Band Band 2 REL99	Company:		LG																																																																																																																																																																																																																																		
	Project #:		14U17021																																																																																																																																																																																																																																		
	Date:		03/27/14																																																																																																																																																																																																																																		
	Test Engineer:		R. Alegre																																																																																																																																																																																																																																		
	Configuration:		EUT with Wireless charger																																																																																																																																																																																																																																		
	Mode:		Tx, 1900MHz Rel 99																																																																																																																																																																																																																																		
	Chamber		Pre-amplifier		Filter		Limit																																																																																																																																																																																																																														
	5m Chamber C		T34 8449B		Filter 1		Part 24																																																																																																																																																																																																																														
	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>f GHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Distance (m)</th> <th>Preamp (dB)</th> <th>Filter (dB)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td colspan="10">Low Ch, 1852.4MHz</td> </tr> <tr> <td>3.705</td> <td>-22.6</td> <td>V</td> <td>3.0</td> <td>35.4</td> <td>1.0</td> <td>-57.0</td> <td>-13.0</td> <td>-44.0</td> <td></td> </tr> <tr> <td>5.557</td> <td>-18.7</td> <td>V</td> <td>3.0</td> <td>34.7</td> <td>1.0</td> <td>-52.4</td> <td>-13.0</td> <td>-39.4</td> <td></td> </tr> <tr> <td>7.409</td> <td>-11.5</td> <td>V</td> <td>3.0</td> <td>34.9</td> <td>1.0</td> <td>-45.4</td> <td>-13.0</td> <td>-32.4</td> <td></td> </tr> <tr> <td>3.705</td> <td>-22.1</td> <td>H</td> <td>3.0</td> <td>35.4</td> <td>1.0</td> <td>-56.5</td> <td>-13.0</td> <td>-43.5</td> <td></td> </tr> <tr> <td>5.557</td> <td>-18.7</td> <td>H</td> <td>3.0</td> <td>34.7</td> <td>1.0</td> <td>-52.5</td> <td>-13.0</td> <td>-39.5</td> <td></td> </tr> <tr> <td>7.409</td> <td>-14.8</td> <td>H</td> <td>3.0</td> <td>34.9</td> <td>1.0</td> <td>-48.7</td> <td>-13.0</td> <td>-35.7</td> <td></td> </tr> <tr> <td colspan="10">Mid Ch, 1880MHz</td> </tr> <tr> <td>3.760</td> <td>-21.9</td> <td>V</td> <td>3.0</td> <td>35.3</td> <td>1.0</td> <td>-56.2</td> <td>-13.0</td> <td>-43.2</td> <td></td> </tr> <tr> <td>5.640</td> <td>-19.6</td> <td>V</td> <td>3.0</td> <td>34.7</td> <td>1.0</td> <td>-53.3</td> <td>-13.0</td> <td>-40.3</td> <td></td> </tr> <tr> <td>7.520</td> <td>-13.7</td> <td>V</td> <td>3.0</td> <td>34.9</td> <td>1.0</td> <td>-47.6</td> <td>-13.0</td> <td>-34.6</td> <td></td> </tr> <tr> <td>3.760</td> <td>-22.1</td> <td>H</td> <td>3.0</td> <td>35.3</td> <td>1.0</td> <td>-56.5</td> <td>-13.0</td> <td>-43.5</td> <td></td> </tr> <tr> <td>5.640</td> <td>-19.3</td> <td>H</td> <td>3.0</td> <td>34.7</td> <td>1.0</td> <td>-53.0</td> <td>-13.0</td> <td>-40.0</td> <td></td> </tr> <tr> <td>7.520</td> <td>-14.9</td> <td>H</td> <td>3.0</td> <td>34.9</td> <td>1.0</td> <td>-48.8</td> <td>-13.0</td> <td>-35.8</td> <td></td> </tr> <tr> <td colspan="10">High Ch, 1907.6MHz</td> </tr> <tr> <td>3.815</td> <td>-21.0</td> <td>V</td> <td>3.0</td> <td>35.3</td> <td>1.0</td> <td>-55.3</td> <td>-13.0</td> <td>-42.3</td> <td></td> </tr> <tr> <td>5.723</td> <td>-19.1</td> <td>V</td> <td>3.0</td> <td>34.7</td> <td>1.0</td> <td>-52.8</td> <td>-13.0</td> <td>-39.8</td> <td></td> </tr> <tr> <td>7.630</td> <td>-9.3</td> <td>V</td> <td>3.0</td> <td>34.9</td> <td>1.0</td> <td>-43.3</td> <td>-13.0</td> <td>-30.3</td> <td></td> </tr> <tr> <td>3.815</td> <td>-21.7</td> <td>H</td> <td>3.0</td> <td>35.3</td> <td>1.0</td> <td>-56.0</td> <td>-13.0</td> <td>-43.0</td> <td></td> </tr> <tr> <td>5.723</td> <td>-19.2</td> <td>H</td> <td>3.0</td> <td>34.7</td> <td>1.0</td> <td>-52.9</td> <td>-13.0</td> <td>-39.9</td> <td></td> </tr> <tr> <td>7.630</td> <td>-15.6</td> <td>H</td> <td>3.0</td> <td>34.9</td> <td>1.0</td> <td>-49.6</td> <td>-13.0</td> <td>-36.6</td> <td></td> </tr> </tbody> </table>										f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch, 1852.4MHz										3.705	-22.6	V	3.0	35.4	1.0	-57.0	-13.0	-44.0		5.557	-18.7	V	3.0	34.7	1.0	-52.4	-13.0	-39.4		7.409	-11.5	V	3.0	34.9	1.0	-45.4	-13.0	-32.4		3.705	-22.1	H	3.0	35.4	1.0	-56.5	-13.0	-43.5		5.557	-18.7	H	3.0	34.7	1.0	-52.5	-13.0	-39.5		7.409	-14.8	H	3.0	34.9	1.0	-48.7	-13.0	-35.7		Mid Ch, 1880MHz										3.760	-21.9	V	3.0	35.3	1.0	-56.2	-13.0	-43.2		5.640	-19.6	V	3.0	34.7	1.0	-53.3	-13.0	-40.3		7.520	-13.7	V	3.0	34.9	1.0	-47.6	-13.0	-34.6		3.760	-22.1	H	3.0	35.3	1.0	-56.5	-13.0	-43.5		5.640	-19.3	H	3.0	34.7	1.0	-53.0	-13.0	-40.0		7.520	-14.9	H	3.0	34.9	1.0	-48.8	-13.0	-35.8		High Ch, 1907.6MHz										3.815	-21.0	V	3.0	35.3	1.0	-55.3	-13.0	-42.3		5.723	-19.1	V	3.0	34.7	1.0	-52.8	-13.0	-39.8		7.630	-9.3	V	3.0	34.9	1.0	-43.3	-13.0	-30.3		3.815	-21.7	H	3.0	35.3	1.0	-56.0	-13.0	-43.0		5.723	-19.2	H	3.0	34.7	1.0	-52.9	-13.0	-39.9		7.630	-15.6	H	3.0	34.9	1.0	-49.6	-13.0	-36.6
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																																																																																																																																																												
Low Ch, 1852.4MHz																																																																																																																																																																																																																																					
3.705	-22.6	V	3.0	35.4	1.0	-57.0	-13.0	-44.0																																																																																																																																																																																																																													
5.557	-18.7	V	3.0	34.7	1.0	-52.4	-13.0	-39.4																																																																																																																																																																																																																													
7.409	-11.5	V	3.0	34.9	1.0	-45.4	-13.0	-32.4																																																																																																																																																																																																																													
3.705	-22.1	H	3.0	35.4	1.0	-56.5	-13.0	-43.5																																																																																																																																																																																																																													
5.557	-18.7	H	3.0	34.7	1.0	-52.5	-13.0	-39.5																																																																																																																																																																																																																													
7.409	-14.8	H	3.0	34.9	1.0	-48.7	-13.0	-35.7																																																																																																																																																																																																																													
Mid Ch, 1880MHz																																																																																																																																																																																																																																					
3.760	-21.9	V	3.0	35.3	1.0	-56.2	-13.0	-43.2																																																																																																																																																																																																																													
5.640	-19.6	V	3.0	34.7	1.0	-53.3	-13.0	-40.3																																																																																																																																																																																																																													
7.520	-13.7	V	3.0	34.9	1.0	-47.6	-13.0	-34.6																																																																																																																																																																																																																													
3.760	-22.1	H	3.0	35.3	1.0	-56.5	-13.0	-43.5																																																																																																																																																																																																																													
5.640	-19.3	H	3.0	34.7	1.0	-53.0	-13.0	-40.0																																																																																																																																																																																																																													
7.520	-14.9	H	3.0	34.9	1.0	-48.8	-13.0	-35.8																																																																																																																																																																																																																													
High Ch, 1907.6MHz																																																																																																																																																																																																																																					
3.815	-21.0	V	3.0	35.3	1.0	-55.3	-13.0	-42.3																																																																																																																																																																																																																													
5.723	-19.1	V	3.0	34.7	1.0	-52.8	-13.0	-39.8																																																																																																																																																																																																																													
7.630	-9.3	V	3.0	34.9	1.0	-43.3	-13.0	-30.3																																																																																																																																																																																																																													
3.815	-21.7	H	3.0	35.3	1.0	-56.0	-13.0	-43.0																																																																																																																																																																																																																													
5.723	-19.2	H	3.0	34.7	1.0	-52.9	-13.0	-39.9																																																																																																																																																																																																																													
7.630	-15.6	H	3.0	34.9	1.0	-49.6	-13.0	-36.6																																																																																																																																																																																																																													
Rev. 03.03.09																																																																																																																																																																																																																																					

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement									
Company: LG Project #: 14U17021 Date: 03/27/14 Test Engineer: R. Alegre Configuration: EUT with Wireless charger Mode: WCDMA_HSDPA_850									
Chamber 3m Chamber		Pre-amplifier T34 8449B		Filter Filter 1		Limit Part 24			
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 826.40MHz									
Band 5 HSDPA	1.652	-28.7	V	3.0	37.4	1.0	-65.0	-13.0	-52.0
	2.479	-25.0	V	3.0	36.4	1.0	-60.4	-13.0	-47.4
	3.306	-23.3	V	3.0	35.8	1.0	-58.1	-13.0	-45.1
	1.652	-29.2	H	3.0	37.4	1.0	-65.5	-13.0	-52.5
	2.479	-27.3	H	3.0	36.4	1.0	-62.7	-13.0	-49.7
	3.306	-24.0	H	3.0	35.8	1.0	-58.8	-13.0	-45.8
Mid Ch, 836.6MHz									
	1.673	-28.0	V	3.0	37.3	1.0	-64.4	-13.0	-51.4
	2.510	-24.0	V	3.0	36.4	1.0	-59.4	-13.0	-46.4
	3.346	-23.1	V	3.0	35.8	1.0	-57.8	-13.0	-44.8
	1.673	-28.6	H	3.0	37.3	1.0	-64.9	-13.0	-51.9
	2.510	-26.8	H	3.0	36.4	1.0	-62.2	-13.0	-49.2
	3.346	-22.7	H	3.0	35.8	1.0	-57.5	-13.0	-44.5
High Ch, 846.6MHz									
	1.693	-30.5	V	3.0	37.3	1.0	-66.8	-13.0	-53.8
	2.539	-24.3	V	3.0	36.3	1.0	-59.7	-13.0	-46.7
	3.386	-21.9	V	3.0	35.7	1.0	-56.6	-13.0	-43.6
	1.693	-29.5	H	3.0	37.3	1.0	-65.8	-13.0	-52.8
	2.539	-26.5	H	3.0	36.3	1.0	-61.8	-13.0	-48.8
	3.386	-22.5	H	3.0	35.7	1.0	-57.2	-13.0	-44.2
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.									

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement									
Company: LG Project #: 14U17021 Date: 03/27/14 Test Engineer: R. Alegre Configuration: EUT with Wireless charger Mode: WCDMA_Rel 99_ 850									
Chamber 3m Chamber		Pre-amplifier T34 8449B		Filter Filter 1		Limit Part 24			
f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 826.40MHz									
1.652	-28.3	V	3.0	37.4	1.0	-64.7	-13.0	-51.7	
2.479	-24.7	V	3.0	36.4	1.0	-60.1	-13.0	-47.1	
3.306	-23.8	V	3.0	35.8	1.0	-58.6	-13.0	-45.6	
1.652	-28.5	H	3.0	37.4	1.0	-64.8	-13.0	-51.8	
2.479	-28.6	H	3.0	36.4	1.0	-64.0	-13.0	-51.0	
3.306	-24.0	H	3.0	35.8	1.0	-58.8	-13.0	-45.8	
Mid Ch, 836.6MHz									
1.673	-27.9	V	3.0	37.3	1.0	-64.2	-13.0	-51.2	
2.510	-24.4	V	3.0	36.4	1.0	-59.7	-13.0	-46.7	
3.346	-23.8	V	3.0	35.8	1.0	-58.5	-13.0	-45.5	
1.673	-28.8	H	3.0	37.3	1.0	-65.1	-13.0	-52.1	
2.510	-27.0	H	3.0	36.4	1.0	-62.4	-13.0	-49.4	
3.346	-22.8	H	3.0	35.8	1.0	-57.6	-13.0	-44.6	
High Ch, 846.6MHz									
1.693	-29.5	V	3.0	37.3	1.0	-65.8	-13.0	-52.8	
2.539	-24.7	V	3.0	36.3	1.0	-60.1	-13.0	-47.1	
3.386	-21.4	V	3.0	35.7	1.0	-56.1	-13.0	-43.1	
1.693	-29.2	H	3.0	37.3	1.0	-65.5	-13.0	-52.5	
2.539	-26.5	H	3.0	36.3	1.0	-61.8	-13.0	-48.8	
3.386	-21.9	H	3.0	35.7	1.0	-56.6	-13.0	-43.6	
Rev. 03.03.09 Note: No other emissions were detected above the system noise floor.									

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
Company:	LG									
Project #:	14U17021									
Date:	03/28/14									
Test Engineer:	R.Alegre									
Configuration:	EUT w/ ac charger									
Mode:	EGPRS 1900									
Chamber Pre-amplifier Filter Limit 3m Chamber T343 8449B Filter 1 Part 24										
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
GSM1 900 EGPRS	Low Ch, 1850MHz									
	3.700	-22.1	V	3.0	35.4	1.0	-56.5	-13.0	-43.5	
	5.550	-19.8	V	3.0	34.7	1.0	-53.6	-13.0	-40.6	
	7.400	-16.6	V	3.0	34.9	1.0	-50.5	-13.0	-37.5	
	3.700	-22.7	H	3.0	35.4	1.0	-57.1	-13.0	-44.1	
	5.550	-18.7	H	3.0	34.7	1.0	-52.5	-13.0	-39.5	
	7.400	-15.2	H	3.0	34.9	1.0	-49.1	-13.0	-36.1	
	Mid Ch, 1880.0MHz									
	3.760	-23.6	V	3.0	35.3	1.0	-57.9	-13.0	-44.9	
	5.640	-18.2	V	3.0	34.7	1.0	-51.9	-13.0	-38.9	
	7.520	-16.3	V	3.0	34.9	1.0	-50.3	-13.0	-37.3	
	3.760	-22.6	H	3.0	35.3	1.0	-56.9	-13.0	-43.9	
	5.640	-20.0	H	3.0	34.7	1.0	-53.7	-13.0	-40.7	
	7.520	-14.6	H	3.0	34.9	1.0	-48.5	-13.0	-35.5	
	High Ch, 1909.8 MHz									
	3.820	-21.9	V	3.0	35.3	1.0	-56.2	-13.0	-43.2	
	5.729	-17.2	V	3.0	34.7	1.0	-50.9	-13.0	-37.9	
	7.639	-15.4	V	3.0	35.0	1.0	-49.4	-13.0	-36.4	
	3.820	-22.5	H	3.0	35.3	1.0	-56.8	-13.0	-43.8	
	5.729	-19.4	H	3.0	34.7	1.0	-53.1	-13.0	-40.1	
7.639	-14.8	H	3.0	35.0	1.0	-48.8	-13.0	-35.8		
Rev. 03.03.09										

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement										
Company:	LG									
Project #:	14U17021									
Date:	03/28/14									
Test Engineer:	R.Alegre									
Configuration:	EUT w/ ac charger									
Mode:	GPRS 1900									
Chamber Pre-amplifier Filter Limit 3m Chamber T343 8449B Filter 1 Part 24										
Band	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
GSM1 900 GPRS	Low Ch, 1850MHz									
	3.700	-22.0	V	3.0	35.4	1.0	-56.4	-13.0	-43.4	
	5.550	-18.8	V	3.0	34.7	1.0	-52.6	-13.0	-39.6	
	7.400	-15.6	V	3.0	34.9	1.0	-49.5	-13.0	-36.5	
	3.700	-22.0	H	3.0	35.4	1.0	-56.4	-13.0	-43.4	
	5.550	-19.3	H	3.0	34.7	1.0	-53.0	-13.0	-40.0	
	7.400	-15.6	H	3.0	34.9	1.0	-49.5	-13.0	-36.5	
	Mid Ch, 1880.0MHz									
	3.760	-21.8	V	3.0	35.3	1.0	-56.2	-13.0	-43.2	
	5.640	-19.8	V	3.0	34.7	1.0	-53.5	-13.0	-40.5	
	7.520	-16.3	V	3.0	34.9	1.0	-50.3	-13.0	-37.3	
	3.760	-22.8	H	3.0	35.3	1.0	-57.1	-13.0	-44.1	
	5.640	-19.5	H	3.0	34.7	1.0	-53.2	-13.0	-40.2	
7.520	-14.4	H	3.0	34.9	1.0	-48.3	-13.0	-35.3		
High Ch, 1909.8 MHz										
3.820	-21.6	V	3.0	35.3	1.0	-55.8	-13.0	-42.8		
5.729	-17.4	V	3.0	34.7	1.0	-51.2	-13.0	-38.2		
7.639	-15.0	V	3.0	35.0	1.0	-49.0	-13.0	-36.0		
3.820	-23.1	H	3.0	35.3	1.0	-57.4	-13.0	-44.4		
5.729	-18.9	H	3.0	34.7	1.0	-52.7	-13.0	-39.7		
7.639	-14.9	H	3.0	35.0	1.0	-48.8	-13.0	-35.8		
Rev. 03.03.09										

Compliance Certification Services Above 1GHz High Frequency Substitution Measurement																																																																																																																																																																																																																																						
Band GSM8 50 EGPRS	Company:		LG																																																																																																																																																																																																																																			
	Project #:		14U17021																																																																																																																																																																																																																																			
	Date:		03/28/14																																																																																																																																																																																																																																			
	Test Engineer:		R.Alegre																																																																																																																																																																																																																																			
	Configuration:		EUT w/ ac charger																																																																																																																																																																																																																																			
	Mode:		EGPRS 850																																																																																																																																																																																																																																			
	Chamber		Pre-amplifier		Filter		Limit																																																																																																																																																																																																																															
	3m Chamber		T34 8449B		Filter 1		Part 24																																																																																																																																																																																																																															
	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>f GHz</th> <th>SG reading (dBm)</th> <th>Ant. Pol. (H/V)</th> <th>Distance (m)</th> <th>Preamp (dB)</th> <th>Filter (dB)</th> <th>EIRP (dBm)</th> <th>Limit (dBm)</th> <th>Delta (dB)</th> <th>Notes</th> </tr> </thead> <tbody> <tr><td colspan="10">Low Ch, 824.2MHz</td></tr> <tr><td>1.648</td><td>-28.7</td><td>V</td><td>3.0</td><td>37.4</td><td>1.0</td><td>-65.1</td><td>-13.0</td><td>-52.1</td><td></td></tr> <tr><td>2.473</td><td>-23.2</td><td>V</td><td>3.0</td><td>36.4</td><td>1.0</td><td>-58.5</td><td>-13.0</td><td>-45.5</td><td></td></tr> <tr><td>3.297</td><td>-23.6</td><td>V</td><td>3.0</td><td>35.8</td><td>1.0</td><td>-58.4</td><td>-13.0</td><td>-45.4</td><td></td></tr> <tr><td>1.648</td><td>-28.5</td><td>H</td><td>3.0</td><td>37.4</td><td>1.0</td><td>-64.9</td><td>-13.0</td><td>-51.9</td><td></td></tr> <tr><td>2.473</td><td>-25.2</td><td>H</td><td>3.0</td><td>36.4</td><td>1.0</td><td>-60.6</td><td>-13.0</td><td>-47.6</td><td></td></tr> <tr><td>3.297</td><td>-23.4</td><td>H</td><td>3.0</td><td>35.8</td><td>1.0</td><td>-58.2</td><td>-13.0</td><td>-45.2</td><td></td></tr> <tr><td colspan="10">Mid Ch, 836.6MHz</td></tr> <tr><td>1.673</td><td>-28.6</td><td>V</td><td>3.0</td><td>37.3</td><td>1.0</td><td>-65.0</td><td>-13.0</td><td>-52.0</td><td></td></tr> <tr><td>2.510</td><td>-23.7</td><td>V</td><td>3.0</td><td>36.4</td><td>1.0</td><td>-59.1</td><td>-13.0</td><td>-46.1</td><td></td></tr> <tr><td>3.346</td><td>-22.9</td><td>V</td><td>3.0</td><td>35.8</td><td>1.0</td><td>-57.7</td><td>-13.0</td><td>-44.7</td><td></td></tr> <tr><td>1.673</td><td>-28.4</td><td>H</td><td>3.0</td><td>37.3</td><td>1.0</td><td>-64.7</td><td>-13.0</td><td>-51.7</td><td></td></tr> <tr><td>2.510</td><td>-25.4</td><td>H</td><td>3.0</td><td>36.4</td><td>1.0</td><td>-60.8</td><td>-13.0</td><td>-47.8</td><td></td></tr> <tr><td>3.346</td><td>-22.7</td><td>H</td><td>3.0</td><td>35.8</td><td>1.0</td><td>-57.4</td><td>-13.0</td><td>-44.4</td><td></td></tr> <tr><td colspan="10">High Ch, 848.8MHz</td></tr> <tr><td>1.698</td><td>-28.3</td><td>V</td><td>3.0</td><td>37.3</td><td>1.0</td><td>-64.6</td><td>-13.0</td><td>-51.6</td><td></td></tr> <tr><td>2.547</td><td>-23.3</td><td>V</td><td>3.0</td><td>36.3</td><td>1.0</td><td>-58.7</td><td>-13.0</td><td>-45.7</td><td></td></tr> <tr><td>3.395</td><td>-22.3</td><td>V</td><td>3.0</td><td>35.7</td><td>1.0</td><td>-57.0</td><td>-13.0</td><td>-44.0</td><td></td></tr> <tr><td>1.698</td><td>-28.4</td><td>H</td><td>3.0</td><td>37.3</td><td>1.0</td><td>-64.7</td><td>-13.0</td><td>-51.7</td><td></td></tr> <tr><td>2.547</td><td>-25.7</td><td>H</td><td>3.0</td><td>36.3</td><td>1.0</td><td>-61.0</td><td>-13.0</td><td>-48.0</td><td></td></tr> <tr><td>3.395</td><td>-23.6</td><td>H</td><td>3.0</td><td>35.7</td><td>1.0</td><td>-58.3</td><td>-13.0</td><td>-45.3</td><td></td></tr> </tbody> </table>										f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	Low Ch, 824.2MHz										1.648	-28.7	V	3.0	37.4	1.0	-65.1	-13.0	-52.1		2.473	-23.2	V	3.0	36.4	1.0	-58.5	-13.0	-45.5		3.297	-23.6	V	3.0	35.8	1.0	-58.4	-13.0	-45.4		1.648	-28.5	H	3.0	37.4	1.0	-64.9	-13.0	-51.9		2.473	-25.2	H	3.0	36.4	1.0	-60.6	-13.0	-47.6		3.297	-23.4	H	3.0	35.8	1.0	-58.2	-13.0	-45.2		Mid Ch, 836.6MHz										1.673	-28.6	V	3.0	37.3	1.0	-65.0	-13.0	-52.0		2.510	-23.7	V	3.0	36.4	1.0	-59.1	-13.0	-46.1		3.346	-22.9	V	3.0	35.8	1.0	-57.7	-13.0	-44.7		1.673	-28.4	H	3.0	37.3	1.0	-64.7	-13.0	-51.7		2.510	-25.4	H	3.0	36.4	1.0	-60.8	-13.0	-47.8		3.346	-22.7	H	3.0	35.8	1.0	-57.4	-13.0	-44.4		High Ch, 848.8MHz										1.698	-28.3	V	3.0	37.3	1.0	-64.6	-13.0	-51.6		2.547	-23.3	V	3.0	36.3	1.0	-58.7	-13.0	-45.7		3.395	-22.3	V	3.0	35.7	1.0	-57.0	-13.0	-44.0		1.698	-28.4	H	3.0	37.3	1.0	-64.7	-13.0	-51.7		2.547	-25.7	H	3.0	36.3	1.0	-61.0	-13.0	-48.0		3.395	-23.6	H	3.0	35.7	1.0	-58.3	-13.0	-45.3	
	f GHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes																																																																																																																																																																																																																												
Low Ch, 824.2MHz																																																																																																																																																																																																																																						
1.648	-28.7	V	3.0	37.4	1.0	-65.1	-13.0	-52.1																																																																																																																																																																																																																														
2.473	-23.2	V	3.0	36.4	1.0	-58.5	-13.0	-45.5																																																																																																																																																																																																																														
3.297	-23.6	V	3.0	35.8	1.0	-58.4	-13.0	-45.4																																																																																																																																																																																																																														
1.648	-28.5	H	3.0	37.4	1.0	-64.9	-13.0	-51.9																																																																																																																																																																																																																														
2.473	-25.2	H	3.0	36.4	1.0	-60.6	-13.0	-47.6																																																																																																																																																																																																																														
3.297	-23.4	H	3.0	35.8	1.0	-58.2	-13.0	-45.2																																																																																																																																																																																																																														
Mid Ch, 836.6MHz																																																																																																																																																																																																																																						
1.673	-28.6	V	3.0	37.3	1.0	-65.0	-13.0	-52.0																																																																																																																																																																																																																														
2.510	-23.7	V	3.0	36.4	1.0	-59.1	-13.0	-46.1																																																																																																																																																																																																																														
3.346	-22.9	V	3.0	35.8	1.0	-57.7	-13.0	-44.7																																																																																																																																																																																																																														
1.673	-28.4	H	3.0	37.3	1.0	-64.7	-13.0	-51.7																																																																																																																																																																																																																														
2.510	-25.4	H	3.0	36.4	1.0	-60.8	-13.0	-47.8																																																																																																																																																																																																																														
3.346	-22.7	H	3.0	35.8	1.0	-57.4	-13.0	-44.4																																																																																																																																																																																																																														
High Ch, 848.8MHz																																																																																																																																																																																																																																						
1.698	-28.3	V	3.0	37.3	1.0	-64.6	-13.0	-51.6																																																																																																																																																																																																																														
2.547	-23.3	V	3.0	36.3	1.0	-58.7	-13.0	-45.7																																																																																																																																																																																																																														
3.395	-22.3	V	3.0	35.7	1.0	-57.0	-13.0	-44.0																																																																																																																																																																																																																														
1.698	-28.4	H	3.0	37.3	1.0	-64.7	-13.0	-51.7																																																																																																																																																																																																																														
2.547	-25.7	H	3.0	36.3	1.0	-61.0	-13.0	-48.0																																																																																																																																																																																																																														
3.395	-23.6	H	3.0	35.7	1.0	-58.3	-13.0	-45.3																																																																																																																																																																																																																														
Rev. 03.03.09																																																																																																																																																																																																																																						
Note: No other emissions were detected above the system noise floor.																																																																																																																																																																																																																																						

