



FCC CFR47 PART 22 SUBPART H
FCC CFR47 PART 24 SUBPART E
FCC CFR47 PART 27 SUBPART L

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA/LTE PHONE WITH BT and DTS WLAN b/g/n

MODEL NUMBER: LG-L61AL, L61AL, LGL61AL

FCC ID: ZNFL61AL

REPORT NUMBER: 15I22343-E1V2

ISSUE DATE: 12/28/2015

Prepared for
LG ELECTRONICS MOBILECOMM U.S.A., INC
1000 SYLVAN AVENUE
ENGLEWOOD CLIFFS,
NEW JERSEY, 07632, U.S.A

Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	12/21/15	Initial Issue	D. Corona
V2	12/28/15	Updated Section 5.5, 10.1.1 and 11.1.1	D. Corona

TABLE OF CONTENTS

2.	TEST METHODOLOGY	6
3.	FACILITIES AND ACCREDITATION	6
4.	CALIBRATION AND UNCERTAINTY	6
4.1.	MEASURING INSTRUMENT CALIBRATION	6
4.2.	SAMPLE CALCULATION	6
4.3.	MEASUREMENT UNCERTAINTY	7
5.	EQUIPMENT UNDER TEST	8
5.1.	DESCRIPTION OF EUT	8
5.2.	MAXIMUM OUTPUT POWER (GSM/EGPRS)	8
5.3.	MAXIMUM OUTPUT POWER (WCDMA)	9
5.4.	MAXIMUM OUTPUT POWER (LTE)	10
5.5.	DESCRIPTION OF AVAILABLE ANTENNAS	12
5.6.	DESCRIPTION OF TEST SETUP	13
6.	TEST AND MEASUREMENT EQUIPMENT	16
7.	SUMMARY TABLE	17
8.	RF POWER OUTPUT VERIFICATION	18
8.1.	GSM/GPRS/EDGE	18
8.1.1.	GSM OUTPUT POWER RESULT	19
8.2.	UMTS REL 99	20
8.2.1.	UMTS REL 99 OUTPUT POWER RESULT	20
8.3.	UMTS HSDPA	21
8.3.1.	UMTS HSDPA OUTPUT POWER RESULT	22
8.4.	UMTS HSUPA	23
8.4.1.	UMTS HSUPA OUTPUT POWER RESULT	24
8.5.	LTE OUTPUT POWER RESULT	25
9.	PEAK TO AVERAGE RATIO	34
9.1.	CONDUCTED PEAK TO AVERAGE RESULT	35
10.	LIMITS AND CONDUCTED RESULTS	44
10.1.	OCCUPIED BANDWIDTH	44
10.1.1.	OCCUPIED BANDWIDTH RESULTS AND PLOTS	45
11.	BAND EDGE EMISSIONS	60
11.1.1.	BAND EDGE PLOTS	61

12.	OUT OF BAND EMISSIONS.....	91
12.1.1.	OUT OF BAND EMISSIONS RESULT AND PLOTS	92
13.	FREQUENCY STABILITY.....	108
13.1.1.	FREQUENCY STABILITY RESULTS.....	109
14.	RADIATED TEST RESULTS	113
14.1.	<i>RADIATED POWER (ERP & EIRP).....</i>	<i>113</i>
14.1.1.	ERP/EIRP RESULTS	114
14.2.	<i>FIELD STRENGTH OF SPURIOUS RADIATION</i>	<i>144</i>
14.2.1.	SPURIOUS RADIATION DATA RESULTS.....	145
15.	SETUP PHOTOS	167

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: LG ELECTRONICS MOBILECOMM U.S.A., INC.
EUT DESCRIPTION: GSM/WCDMA/LTE PHONE WITH BT and DTS WLAN b/g/n
MODEL: LG-L61AL, L61AL, LGL61AL
SERIAL NUMBER: 510KPAE000152
DATE TESTED: NOVEMBER 24 – DECEMBER 8, 2015

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22H, 24E, 27L	PASS

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

Tested By:



DAN CORONIA
CONSUMER TECHNOLOGY DIVISION
WiSE PROJECT LEAD
UL VERIFICATION SERVICES INC



KIYA KEDIDA
CONSUMER TECHNOLOGY DIVISION
WiSE LAB ENGINEER
UL VERIFICATION SERVICES INC



PENG ZHANG
CONSUMER TECHNOLOGY DIVISION
WiSE OPERATION MANAGER
UL VERIFICATION SERVICES INC

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-D, FCC CFR 47 Part 22, FCC CFR Part 24, FCC CFR 47 Part 27.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☒ Chamber A	☐ Chamber D
☐ Chamber B	☐ Chamber E
☒ Chamber C	☐ Chamber F
	☐ Chamber G
	☒ Chamber H

The above test sites and facilities are covered under FCC Test Firm Registration # 208313.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0.

Chambers A through H are covered under Industry Canada company address code 2324B with site numbers 2324B -1 through 2324B-8, respectively.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

EIRP = PSA reading with EUT worst orientation (dBm) + Path loss (dB) – cable loss(
between the SG and substitution antenna) + Substitution Antenna Factor (dBi)
ERP = PSA reading with EUT worst orientation (dBm) + Path loss (dB) – cable loss(
between the SG and substitution antenna)
(Path loss = Signal generator output – PSA reading with substitution antenna)

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB
Radiated Disturbance, 1GHz to 40GHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

This EUT is a GSM/WCDMA/LTE PHONE WITH BT and DTS WLAN b/g/n.

5.2. MAXIMUM OUTPUT POWER (GSM/EGPRS)

The transmitter has a maximum peak conducted and radiated ERP / EIRP output powers as follows:

FCC Part 22/24						
Band	Frequency Range(MHz)	Modulation	Conducted		Radiated	
			AVG(dBm)	AVG(mW)	AVG(dBm)	AVG(mW)
GSM850	824~849	GMSK	33.4	2187.76		
	824~849	GPRS	33.4	2187.76	29.92	981.75
	824~849	EGPRS	27.7	588.84	25.33	341.19
GSM1900	1850~1910	GMSK	30.6	1148.15		
	1850~1910	GPRS	30.6	1148.15	31.01	1261.83
	1850~1910	EGPRS	26.7	467.74	28.81	760.33

5.3. MAXIMUM OUTPUT POWER (WCDMA)

The transmitter has a maximum peak conducted and radiated ERP / EIRP output powers as follows:

FCC Part 22/24/27						
Band	Frequency Range(MHz)	Modulation	Conducted		Radiated	
			AVG(dBm)	AVG(mW)	AVG(dBm)	AVG(mW)
Band 2	1850~1910	REL99	23.3	213.80	24.86	306.20
	1850~1910	HSDPA	23.2	208.93	24.41	276.06
	1850~1910	HSUPA	23.2	208.93		
Band 5	824~849	REL99	23.4	218.78	21.09	128.53
	824~849	HSDPA	23.4	218.78	20.23	105.44
	824~849	HSUPA	23.3	213.80		

5.4. MAXIMUM OUTPUT POWER (LTE)

The transmitter has a maximum peak conducted and radiated ERP/EIRP output powers as follows:

FCC Part 24							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation	Conducted		Radiated	
				AVG(dBm)	AVG(mW)	AVG(dBm)	AVG(mW)
LTE2	1850~1910	1.4MHz	QPSK	24.2	263.03	27.34	542.00
			16QAM	23.2	208.93	26.84	483.06
		3MHz	QPSK	23.79	239.33	27.24	529.66
			16QAM	23.2	208.93	26.74	472.06
		5MHz	QPSK	23.98	250.03	26.90	489.78
			16QAM	23.08	203.24	26.53	449.78
		10MHz	QPSK	23.91	246.04	26.73	470.98
			16QAM	23.2	208.93	26.27	423.64
		15MHz	QPSK	23.94	247.74	26.88	487.53
			16QAM	23.2	208.93	26.44	440.55
		20MHz	QPSK	24.11	257.63	26.45	441.57
			16QAM	23.2	208.93	25.99	397.19

FCC Part 27							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation	Conducted		Radiated	
				AVG(dBm)	AVG(mW)	AVG(dBm)	AVG(mW)
LTE4	1710~1755	1.4MHz	QPSK	24.24	265.46	23.94	247.74
			16QAM	23.4	218.78	23.68	233.35
		3MHz	QPSK	24.15	260.02	24.19	262.42
			16QAM	23.4	218.78	23.78	238.78
		5MHz	QPSK	24.35	272.27	23.82	240.99
			16QAM	23.2	208.93	23.53	225.42
		10MHz	QPSK	24.23	264.85	23.94	247.74
			16QAM	23.2	208.93	23.54	225.94
		15MHz	QPSK	24.31	269.77	24.55	285.10
			16QAM	23.35	216.27	24.17	261.22
		20MHz	QPSK	24.29	268.53	23.96	248.89
			16QAM	23.37	217.27	23.79	239.33

FCC Part 22							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation	Conducted		Radiated	
				AVG(dBm)	AVG(mW)	AVG(dBm)	AVG(mW)
LTE5	824~849	1.4MHz	QPSK	23.75	237.14	21.64	145.88
			16QAM	23.2	208.93	21.1	128.82
		3MHz	QPSK	23.66	232.27	21.5	141.25
			16QAM	23.2	208.93	21.2	131.83
		5MHz	QPSK	23.67	232.81	21.8	151.36
			16QAM	22.98	198.61	21.4	138.04
		10MHz	QPSK	23.80	239.88	20.9	123.03
			16QAM	23.2	208.93	20.5	112.20

FCC Part 27							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation	Conducted		Radiated	
				AVG(dBm)	AVG(mW)	AVG(dBm)	AVG(mW)
LTE17	704~716	5MHz	QPSK	23.68	233.35	18.57	71.94
			16QAM	22.98	198.61	17.95	62.37
		10MHz	QPSK	23.60	229.09	18.85	76.74
			16QAM	22.85	192.75	18.18	65.77

5.5. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PIFA antenna for the [List the bands supported] with a maximum peak gain as follow:

Frequency (MHz)	Peak Gain (dBi)
LTE B2, 1850~1910MHz	0.31
LTE B4, 1710~1755MHz	-0.57
LTE B17, 704~716MHz	-4.34
GSM/WCDMA B5/LTE B5, 824~849MHz	-2.41
GSM/WCDMA B2, 1850~1910MHz	0.31

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	LG	MCS-02WRE	N/A	N/A
Earphone	LG	N/A	N/A	N/A

I/O CABLES (CONDUCTED SETUP)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF Out	1	Spectrum Analyzer	Shielded	None	NA
2	Antenna Port	1	EUT	Shielded	0.1m	NA
3	RF In/Out	1	Communication Test Set	Shielded	1m	NA


I/O CABLES (RADIATED SETUP)

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	USB	1	AC Adapter	Un-shielded	1.2m	No
2	Jack	1	Headset	Shielded	1m	No
3	RF In/out	1	Communication Test Set	Un-shielded	2m	Yes


TEST SETUP

The EUT is continuously communicated to the call box during the tests.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

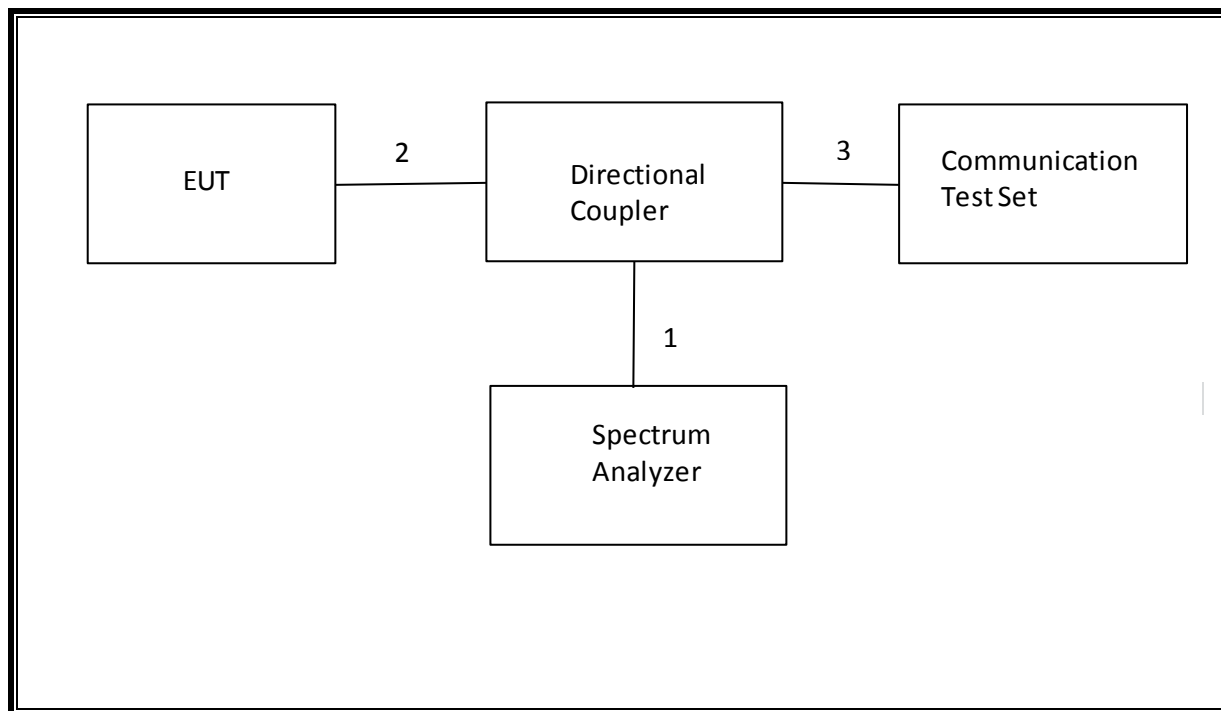

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

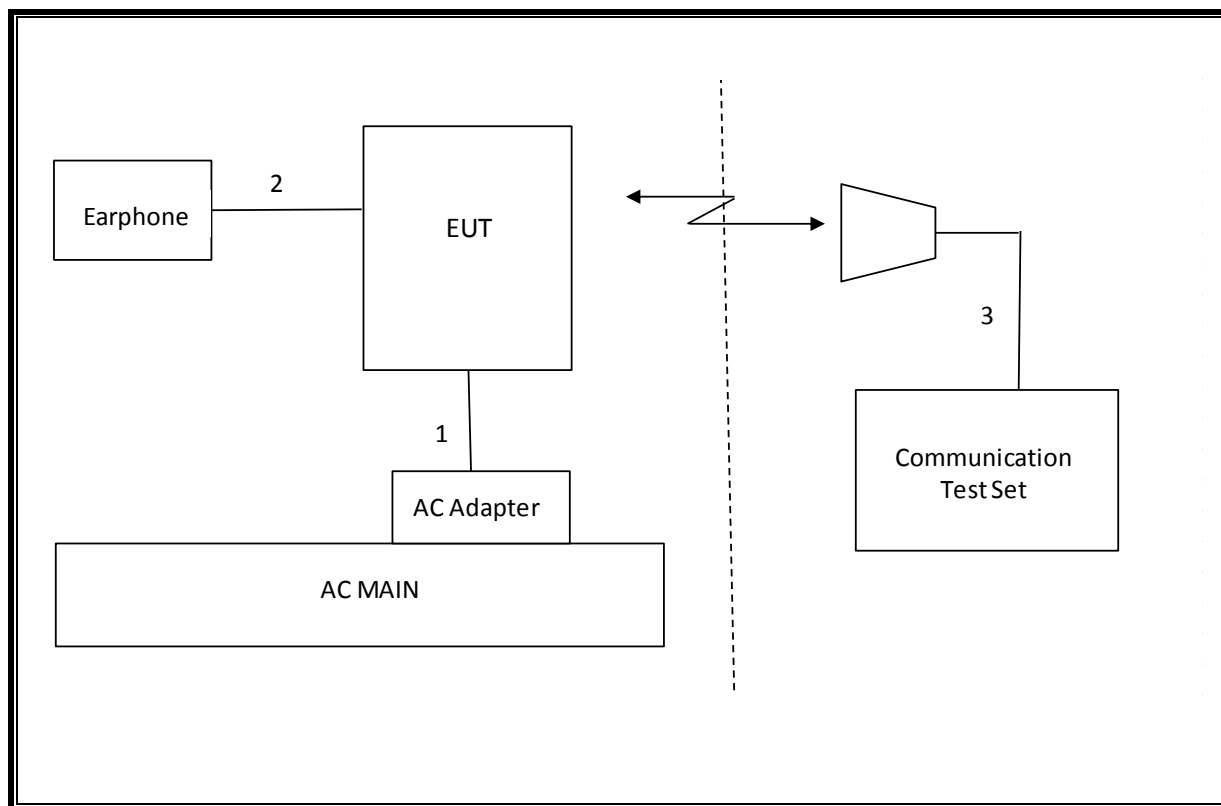

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	T Number	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	123	10/22/16
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	130	06/10/16
Antenna, Horn, 18 GHz	EMCO	3115	59	11/18/16
Highpass Filter, 2.7 GHz	Micro-Tronics	HPM13194	151	CNR
Highpass Filter, 1.5 GHz	Micro-Tronics	HPM13193	153	CNR
Temperature / Humidity Chamber	Thermotron	SE 600-10-10	80	05/15/16
Communications Test Set	R&S	CMW500	159	07/10/16
DC power supply, 8 V @ 3 A or 15 V	Agilent / HP	E3610A	None	CNR
Vector signal generator, 6 GHz	Agilent / HP	E4438C	None	06/16/16
Antenna, Tuned Dipole 400~1000	ETS	3121C DB4	273	05/05/16
Directional Coupler	RF-Lambda	RFDC5M06G15	None	CNR
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	447	05/18/16

Test Software List			
Description	Manufacturer	Model	Version
Radiated Software	UL	UL EMC	Ver 9.5, June 24, 2015
Conducted Software	UL	UL EMC	Ver 9.5, May 26, 2015
CLT Software	UL	UL RF	Ver 1.0, Feb 2, 2015
Antenna Port Software	UL	UL RF	Ver 3.7, Nov 12, 2015

7. SUMMARY TABLE

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst Case
2.1049	N/A	Occupied Band width (99%)	N/A	Conducted	Pass	17.90 MHz
22.917(a) 24.238(a) 27.53(g) 90.691	RSS-132(4.5.1) RSS-133(6.5.1) RSS-139(6.5.1)	Band Edge / Conducted Spurious Emission	-13dBm		Pass	-17.073 dBm
2.1046	N/A	Conducted output power	N/A		Pass	33.4 dBm
22.355 24.235 27.54 90.213	RSS-132(4.3) RSS-133(6.3) RSS-139(6.3) RSS-199(4.3)	Frequency Stability	2.5PPM		Pass	0.011 PPM
22.913(a)(2)	RSS-132(4.4)	Effective Radiated Power	38 dBm	Radiated	Pass	29.92 dBm
27.50(c)(10)	N/A		34.77 dBm		Pass	18.85 dBm
24.232(c) 27.50(h)(2)	RSS-133(6.4) RSS-199(4.4)	Equivalent Isotropic Radiated Power	33dBm		Pass	31.01 dBm
27.50(d)(4)	RSS-139(6.4)		30dBm		Pass	24.55 dBm
22.917(a) 24.238(a) 27.53(g)	RSS-132(4.5.1) RSS-133(6.5.1) RSS-139(6.5.1)	Radiated Spurious Emission	-13dBm		Pass	-32.8 dBm

8. RF POWER OUTPUT VERIFICATION

8.1. GSM/GPRS/EDGE

Function: Menu select > GSM Mobile Station > GSM 850/900/1800/1900
Press Connection control to choose the different menus
Press RESET > choose all to reset all settings
Connection Press Signal Off to turn off the signal and change settings
Network Support > GSM+GPRS or GSM+EGPRS
Main Service > Packet Data
Service selection > Test Mode A – Auto Slot Config. off
MS Signal Press Slot Config bottom on the right twice to select and change the number of time slots and power setting
 > Slot configuration > Uplink/Gamma
 > 33 dBm for GPRS 850/900
 > 30 dBm for GPRS1800/1900
BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel
Frequency Offset > + 0 Hz
Mode > BCCH and TCH
BCCH Level > -85 dBm (May need to adjust if link is not stable)
BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]
Channel Type > Off
P0> 4 dB
Slot Config > Unchanged (if already set under MS Signal)
TCH > choose desired test channel
Hopping > Off
Main Timeslot > 3 (Default)
Network Coding Scheme > CS4 (GPRS) and MCS5 ~ MCS9 (EGPRS)
 Bit Stream > 2E9-1PSR Bit Pattern
AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input
Connection Press Signal On to turn on the signal and change settings

8.1.1. GSM OUTPUT POWER RESULT

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst Pwr (dBm)	Frame Pwr (dBm)
GSM (Voice)	CS1	1	128	824.4	33.3	24.3
			190	836.6	33.4	24.4
			251	848.8	33.4	24.4
GPRS (GMSK)	CS1	1	128	824.4	33.3	24.3
			190	836.6	33.4	24.4
			251	848.8	33.4	24.4
		2	128	824.4	31.3	25.3
			190	836.6	31.0	25.0
			251	848.8	31.0	25.0
EGPRS (8PSK)	MCS5	1	128	824.4	27.7	18.7
			190	836.6	27.7	18.7
			251	848.8	27.6	18.6
		2	128	824.4	25.7	19.7
			190	836.6	25.6	19.6
			251	848.8	25.5	19.5

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst Pwr (dBm)	Frame Pwr (dBm)
GSM (Voice)	CS1	1	512	1850.2	30.4	21.4
			661	1880.0	30.6	21.6
			810	1909.8	30.5	21.5
GPRS (GMSK)	CS1	1	512	1850.2	30.4	21.4
			661	1880.0	30.6	21.6
			810	1909.8	30.5	21.5
		2	512	1850.2	29.1	23.1
			661	1880.0	29.1	23.1
			810	1909.8	29.2	23.2
EGPRS (8PSK)	MCS5	1	512	1850.2	26.6	17.6
			661	1880.0	26.7	17.7
			810	1909.8	26.7	17.7
		2	512	1850.2	24.5	18.5
			661	1880.0	24.7	18.7
			810	1909.8	24.6	18.6

8.2. UMTS REL 99

TEST PROCEDURE

The following summary of these settings are illustrated below:

WCDMA General Settings	Mode	Rel99
	Subtest	-
	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	HSDPA FRC	Not Applicable
	HSUPA Test	Not Applicable
	Power Control Algorithm	Algorithm2
	β_c	Not Applicable
	β_d	Not Applicable
	β_{ec}	Not Applicable
	β_c/β_d	8/15
	β_{hs}	Not Applicable
	β_{ed}	Not Applicable

8.2.1. UMTS REL 99 OUTPUT POWER RESULT

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band V	Rel 99 (RMC, 12.2 kbps)	4132	826.4	0	23.3
		4183	836.6	0	23.3
		4233	846.6	0	23.4

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band II	Rel 99 (RMC, 12.2 kbps)	9262	1852.4	0	23.3
		9400	1880.0	0	23.3
		9538	1907.6	0	23.3

8.3. UMTS HSDPA

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	Rel5 HSDPA			
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR (dB)	0	0	0.5	0.5
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs} = \beta_{hs}/\beta_c$	30/15			

8.3.1. UMTS HSDPA OUTPUT POWER RESULT

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band V	Subtest 1	4132	826.4	0	23.3
		4183	836.6	0	23.3
		4233	846.6	0	23.4
	Subtest 2	4132	826.4	0	23.3
		4183	836.6	0	23.4
		4233	846.6	0	23.4
	Subtest 3	4132	826.4	0.5	22.9
		4183	836.6	0.5	22.9
		4233	846.6	0.5	23.0
	Subtest 4	4132	826.4	0.5	22.9
		4183	836.6	0.5	23.0
		4233	846.6	0.5	23.0

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band II	Subtest 1	9262	1852.4	0	23.2
		9400	1880.0	0	23.2
		9538	1907.6	0	23.2
	Subtest 2	9262	1852.4	0	23.2
		9400	1880.0	0	22.8
		9538	1907.6	0	23.1
	Subtest 3	9262	1852.4	0.5	23.0
		9400	1880.0	0.5	23.0
		9538	1907.6	0.5	23.0
	Subtest 4	9262	1852.4	0.5	23.0
		9400	1880.0	0.5	23.0
		9538	1907.6	0.5	23.0

8.4. UMTS HSUPA

TEST PROCEDURE

The following summary of these settings are illustrated below: (ETSI TS 134.121-1 Table C.11.1)

	Mode	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	P-CPICH (dB)	-10				
	P-CCPCH (dB)	-12				
	SCH (dB)	-12				
	PICH(dB)	-15				
	DPCH (dB)	-9				
	HS-SCCH_1 (dB)	-8				
	HS-PDSCH (dB)	-3				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	Bc	11/15	6/15	15/15	2/15	15/15
	Bd	15/15	15/15	9/15	15/15	15/15
	Bec	209/225	12/15	30/15	2/15	5/15
	$\beta c/\beta d$	11/15	6/15	15/9	2/15	15/15
	Bhs	22/15	12/15	30/15	4/15	30/15
HSDPA Specific Settings	βed (note1)	1309/225	94/75	47/15	56/75	134/15
	MPR	0	2	1	2	0
	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
HSUPA Specific Settings	CQI Repetition Factor (Table 5.2B.4)	2				
	Ahs = $\beta hs/\beta c$	30/15				
	D E-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	Reference E-TFCIs	5	5	2	5	5
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_TFCIs	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27		E-TFCI 11 E-TFCI PO 4 E-TFCI 92 E-TFCI PO 18		E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27

Note1: βed cannot be set directly, it is set by Absolute Grant Value.

8.4.1. UMTS HSUPA OUTPUT POWER RESULT

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band V	Subtest 1	4132	826.4	0	23.3
		4183	836.6	0	22.7
		4233	846.6	0	22.3
	Subtest 2	4132	826.4	2	21.4
		4183	836.6	2	21.3
		4233	846.6	2	21.6
	Subtest 3	4132	826.4	1	22.3
		4183	836.6	1	21.8
		4233	846.6	1	22.4
	Subtest 4	4132	826.4	2	21.6
		4183	836.6	2	21.6
		4233	846.6	2	21.7
	Subtest 5	4132	826.4	0	23.3
		4183	836.6	0	23.4
		4233	846.6	0	23.4

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band II	Subtest 1	9262	1852.4	0	23.2
		9400	1880.0	0	23.2
		9538	1907.6	0	23.1
	Subtest 2	9262	1852.4	2	21.7
		9400	1880.0	2	21.3
		9538	1907.6	2	21.3
	Subtest 3	9262	1852.4	1	22.4
		9400	1880.0	1	22.5
		9538	1907.6	1	22.4
	Subtest 4	9262	1852.4	2	21.6
		9400	1880.0	2	21.5
		9538	1907.6	2	21.3
	Subtest 5	9262	1852.4	0	23.5
		9400	1880.0	0	23.5
		9538	1907.6	0	23.5

8.5. LTE OUTPUT POWER RESULT

LTE Band 2

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						18700	18900	19100
						1860 MHz	1880 MHz	1900 MHz
LTE Band 2	20	QPSK	1	0	0	23.99	23.98	24.11
			1	49	0	24.04	23.79	24.01
			1	99	0	23.89	23.87	23.85
			50	0	1	23.00	22.98	22.94
			50	24	1	22.99	22.94	22.93
			50	50	1	22.99	22.98	22.84
			100	0	1	23.03	22.98	22.95
		16QAM	1	0	1	23.07	23.20	22.97
			1	49	1	22.76	23.20	22.89
			1	99	1	22.57	23.20	22.76
			50	0	2	21.93	21.94	22.08
			50	24	2	22.12	21.94	21.98
			50	50	2	22.19	21.92	21.90
			100	0	2	22.04	21.86	22.04
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						18675	18900	19125
						1857.5 MHz	1880 MHz	1902.5 MHz
LTE Band 2	15	QPSK	1	0	0	23.73	23.55	23.94
			1	37	0	23.87	23.65	23.82
			1	74	0	23.78	23.83	23.81
			36	0	1	22.90	22.97	22.95
			36	20	1	22.91	22.93	22.86
			36	39	1	22.93	22.96	22.83
			75	0	1	22.87	22.91	22.75
		16QAM	1	0	1	23.20	23.20	23.20
			1	37	1	23.20	23.20	23.20
			1	74	1	23.20	23.20	23.20
			36	0	2	22.00	21.81	21.86
			36	20	2	21.95	21.78	21.71
			36	39	2	21.97	21.76	21.84
			75	0	2	21.85	21.89	21.80

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						18650	18900	19150
						1855 MHz	1880 MHz	1905 MHz
LTE Band 2	10	QPSK	1	0	0	23.75	23.77	23.91
			1	25	0	23.77	23.62	23.60
			1	49	0	23.76	23.70	23.69
			25	0	1	22.88	22.91	22.85
			25	12	1	22.85	22.92	22.88
			25	25	1	22.85	22.90	22.87
			50	0	1	22.90	22.91	22.88
		16QAM	1	0	1	23.12	23.05	23.20
			1	25	1	23.15	23.20	23.20
			1	49	1	23.10	23.20	23.20
			25	0	2	21.87	21.93	21.93
			25	12	2	21.87	21.92	21.94
			25	25	2	21.85	21.91	21.94
			50	0	2	21.89	21.81	21.82
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						18625	18900	19175
						1852.5 MHz	1880 MHz	1907.5 MHz
LTE Band 2	5	QPSK	1	0	0	23.55	23.76	23.62
			1	12	0	23.98	23.88	23.57
			1	24	0	23.66	23.69	23.65
			12	0	1	22.84	22.85	22.84
			12	7	1	22.87	22.90	22.88
			12	13	1	22.86	22.87	22.87
			25	0	1	22.84	22.87	22.87
		16QAM	1	0	1	23.08	22.88	22.81
			1	12	1	23.00	22.52	22.94
			1	24	1	23.07	22.75	22.91
			12	0	2	21.75	21.81	21.77
			12	7	2	21.93	21.90	21.88
			12	13	2	21.78	21.81	21.97
			25	0	2	21.88	21.92	22.06

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						18615	18900	19185
						1851.5 MHz	1880 MHz	1908.5 MHz
LTE Band 2	3	QPSK	1	0	0	23.59	23.59	23.62
			1	8	0	23.55	23.68	23.66
			1	14	0	23.49	23.59	23.79
			8	0	1	22.81	22.79	22.77
			8	4	1	22.78	22.82	22.89
			8	7	1	22.73	22.83	22.81
			15	0	1	22.72	22.87	22.78
		16QAM	1	0	1	22.45	23.20	23.20
			1	8	1	22.31	23.20	23.20
			1	14	1	22.45	23.20	23.20
			8	0	2	21.85	21.80	21.82
			8	4	2	21.96	21.74	21.83
			8	7	2	21.78	21.66	21.79
			15	0	2	21.80	21.89	21.90
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						18607	18900	19193
						1850.7 MHz	1880 MHz	1909.3 MHz
LTE Band 2	1.4	QPSK	1	0	0	23.69	24.18	22.75
			1	3	0	23.85	24.20	23.59
			1	5	0	23.89	24.20	23.47
			3	0	0	24.01	24.03	23.58
			3	1	0	24.00	24.03	23.56
			3	3	0	24.04	23.99	23.63
			6	0	1	23.20	23.20	22.67
		16QAM	1	0	1	23.20	22.90	23.20
			1	3	1	22.90	23.05	23.20
			1	5	1	22.89	23.01	23.20
			3	0	1	22.75	22.78	23.01
			3	1	1	22.74	23.20	23.07
			3	3	1	22.70	23.20	23.09
			6	0	2	22.20	22.20	22.15

LTE Band 4

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20050	20175	20300
						1720 MHz	1732.5 MHz	1745 MHz
LTE Band 4	20	QPSK	1	0	0	24.03	24.14	24.29
			1	49	0	23.93	24.05	23.94
			1	99	0	23.89	23.99	23.67
			50	0	1	23.24	23.35	23.20
			50	24	1	23.23	23.34	23.20
			50	50	1	23.14	23.29	23.33
			100	0	1	23.30	23.36	23.20
		16QAM	1	0	1	23.20	23.20	23.20
			1	49	1	23.20	23.20	23.20
			1	99	1	23.20	23.20	23.37
			50	0	2	22.29	22.20	22.20
			50	24	2	22.30	22.29	22.20
			50	50	2	22.34	22.25	22.20
			100	0	2	22.26	22.36	22.39
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20025	20175	20325
						1717.5 MHz	1732.5 MHz	1747.5 MHz
LTE Band 4	15	QPSK	1	0	0	24.11	23.96	24.20
			1	37	0	24.31	24.09	24.26
			1	74	0	23.89	23.80	24.25
			36	0	1	23.27	23.36	23.20
			36	20	1	23.22	23.28	23.38
			36	39	1	23.23	23.34	23.39
			75	0	1	23.26	23.35	23.38
		16QAM	1	0	1	23.20	23.20	23.35
			1	37	1	23.20	23.20	23.18
			1	74	1	23.20	23.20	23.28
			36	0	2	22.32	22.20	22.29
			36	20	2	22.30	22.20	22.19
			36	39	2	22.20	22.39	22.20
			75	0	2	22.23	22.34	22.34

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20000	20175	20350
						1715 MHz	1732.5 MHz	1750 MHz
LTE Band 4	10	QPSK	1	0	0	23.85	23.94	24.23
			1	25	0	23.82	24.11	23.96
			1	49	0	23.85	23.91	24.03
			25	0	1	23.19	23.29	23.33
			25	12	1	23.18	23.30	23.38
			25	25	1	23.19	23.31	23.39
			50	0	1	23.23	23.26	23.31
		16QAM	1	0	1	23.20	23.20	23.20
			1	25	1	23.20	23.20	23.20
			1	49	1	23.20	23.20	23.20
			25	0	2	22.34	22.20	22.30
			25	12	2	22.33	22.31	22.22
			25	25	2	22.32	22.21	22.21
			50	0	2	22.37	22.27	22.31
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						19975	20175	20375
						1712.5 MHz	1732.5 MHz	1752.5 MHz
LTE Band 4	5	QPSK	1	0	0	24.03	24.11	23.95
			1	12	0	24.05	24.35	24.22
			1	24	0	24.02	24.03	24.12
			12	0	1	23.33	23.20	23.20
			12	7	1	23.20	23.20	23.20
			12	13	1	23.23	23.38	23.20
			25	0	1	23.24	23.34	23.40
		16QAM	1	0	1	23.20	23.00	23.20
			1	12	1	23.20	23.11	23.20
			1	24	1	23.20	22.69	23.20
			12	0	2	22.26	22.35	22.39
			12	7	2	22.26	22.20	22.20
			12	13	2	22.38	22.35	22.20
			25	0	2	22.28	22.20	22.20

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						19965	20175	20385
						1711.5 MHz	1732.5 MHz	1753.5 MHz
LTE Band 4	3	QPSK	1	0	0	23.80	24.05	24.11
			1	8	0	23.89	24.15	23.95
			1	14	0	23.92	23.98	24.15
			8	0	1	23.32	23.38	23.40
			8	4	1	23.32	23.40	23.40
			8	7	1	23.22	23.38	23.33
			15	0	1	23.25	23.40	23.40
		16QAM	1	0	1	23.40	23.40	23.40
			1	8	1	23.40	23.40	23.40
			1	14	1	23.40	23.40	23.40
			8	0	2	22.37	22.40	22.15
			8	4	2	22.40	22.23	21.95
			8	7	2	22.40	22.21	21.94
			15	0	2	22.20	22.40	22.40
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						19957	20175	20393
						1710.7 MHz	1732.5 MHz	1754.3 MHz
LTE Band 4	1.4	QPSK	1	0	0	23.91	23.26	24.20
			1	3	0	23.94	23.92	24.17
			1	5	0	23.78	24.01	24.02
			3	0	0	24.11	24.18	24.06
			3	1	0	24.03	24.15	24.24
			3	3	0	24.01	24.13	24.12
			6	0	1	23.22	23.31	23.27
		16QAM	1	0	1	23.40	23.40	23.40
			1	3	1	23.40	23.40	23.40
			1	5	1	23.40	23.40	23.40
			3	0	1	23.40	23.40	23.34
			3	1	1	23.40	23.40	23.30
			3	3	1	23.40	23.40	23.29
			6	0	2	22.40	22.40	22.23

LTE Band 5

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20450	20525	20600
						829 MHz	836.5 MHz	844 MHz
LTE Band 5	10	QPSK	1	0	0	23.53	23.57	23.79
			1	25	0	23.34	23.41	23.46
			1	49	0	23.36	23.56	23.80
			25	0	1	22.77	22.78	22.84
			25	12	1	22.67	22.71	22.77
			25	25	1	22.78	22.76	22.87
			50	0	1	22.67	22.76	22.94
		16QAM	1	0	1	22.96	22.88	22.95
			1	25	1	22.96	23.15	22.77
			1	49	1	22.90	23.20	23.20
			25	0	2	21.85	21.76	21.82
			25	12	2	21.63	21.57	21.84
			25	25	2	21.71	21.69	21.84
			50	0	2	21.73	21.66	21.91
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20425	20525	20625
						826.5 MHz	836.5 MHz	846.5 MHz
LTE Band 5	5	QPSK	1	0	0	23.63	23.62	23.44
			1	12	0	23.67	23.55	23.66
			1	24	0	23.48	23.59	23.42
			12	0	1	22.79	22.74	22.77
			12	7	1	22.68	22.70	22.84
			12	13	1	22.68	22.70	22.87
			25	0	1	22.64	22.69	22.83
		16QAM	1	0	1	22.98	22.72	22.72
			1	12	1	22.59	22.46	22.82
			1	24	1	22.88	22.59	22.83
			12	0	2	21.71	21.71	21.77
			12	7	2	21.56	21.59	21.83
			12	13	2	21.55	21.64	21.79
			25	0	2	21.72	21.66	21.76

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20415	20525	20635
						825.5 MHz	836.5 MHz	847.5 MHz
LTE Band 5	3	QPSK	1	0	0	23.57	23.47	23.47
			1	8	0	23.48	23.62	23.47
			1	14	0	23.38	23.66	23.65
			8	0	1	22.73	22.81	22.95
			8	4	1	22.68	22.67	22.87
			8	7	1	22.69	22.72	22.83
			15	0	1	22.66	22.69	22.87
		16QAM	1	0	1	22.85	23.20	23.20
			1	8	1	22.52	23.20	23.20
			1	14	1	22.37	23.20	23.20
			8	0	2	21.86	21.91	21.94
			8	4	2	21.82	21.92	21.79
			8	7	2	21.85	21.85	21.46
			15	0	2	21.67	21.65	21.93
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20407	20525	20643
						824.7 MHz	836.5 MHz	848.3 MHz
LTE Band 5	1.4	QPSK	1	0	0	23.66	23.42	23.51
			1	3	0	23.50	23.35	23.47
			1	5	0	23.45	23.45	23.46
			3	0	0	23.51	23.46	23.59
			3	1	0	23.49	23.59	23.75
			3	3	0	23.58	23.57	23.57
			6	0	1	22.64	22.70	22.75
		16QAM	1	0	1	23.15	23.20	23.20
			1	3	1	23.20	23.20	23.20
			1	5	1	23.20	23.20	23.20
			3	0	1	22.97	22.71	22.72
			3	1	1	22.90	22.74	22.75
			3	3	1	22.89	22.38	22.81
			6	0	2	21.60	21.59	21.48

LTE Band 17

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)
						23790
						710 MHz
LTE Band 17	10	QPSK	1	0	0	23.60
			1	25	0	23.60
			1	49	0	23.60
			25	0	1	22.70
			25	12	1	22.70
			25	25	1	22.60
			50	0	1	22.70
		16QAM	1	0	1	22.85
			1	25	1	22.84
			1	49	1	22.75
			25	0	2	21.78
			25	12	2	21.60
			25	25	2	21.76
			50	0	2	21.78
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)
						23790
						710 MHz
LTE Band 17	5	QPSK	1	0	0	23.52
			1	12	0	23.68
			1	24	0	23.57
			12	0	1	22.62
			12	7	1	22.58
			12	13	1	22.62
			25	0	1	22.61
		16QAM	1	0	1	22.98
			1	12	1	22.67
			1	24	1	22.91
			12	0	2	21.72
			12	7	2	21.50
			12	13	2	21.53
			25	0	2	21.68

9. PEAK TO AVERAGE RATIO

TEST PROCEDURE


Per KDB 971168 D01 Power Meas License Digital Systems v02r02

TEST SPEC


In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

9.1. CONDUCTED PEAK TO AVERAGE RESULT


GSM

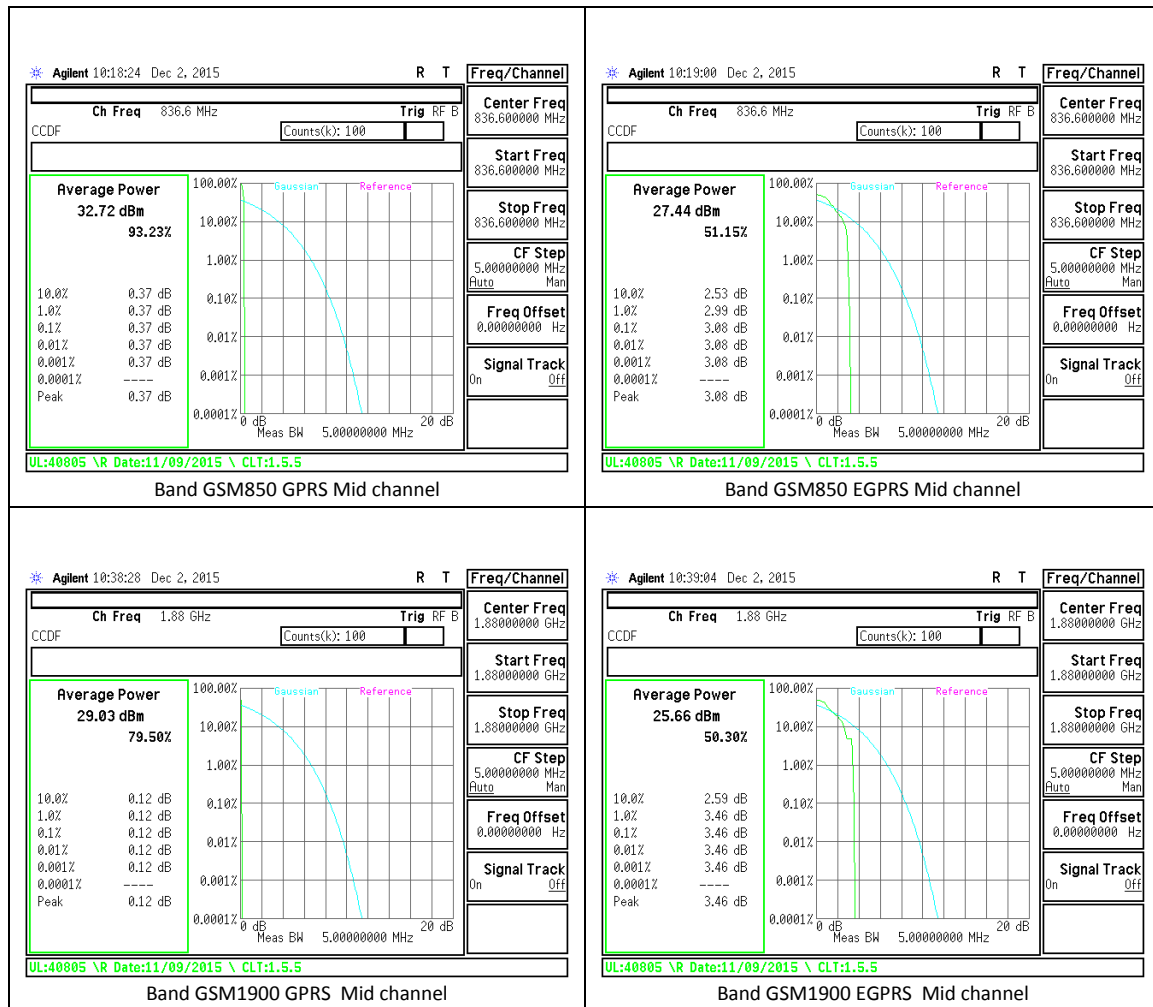


WCDMA

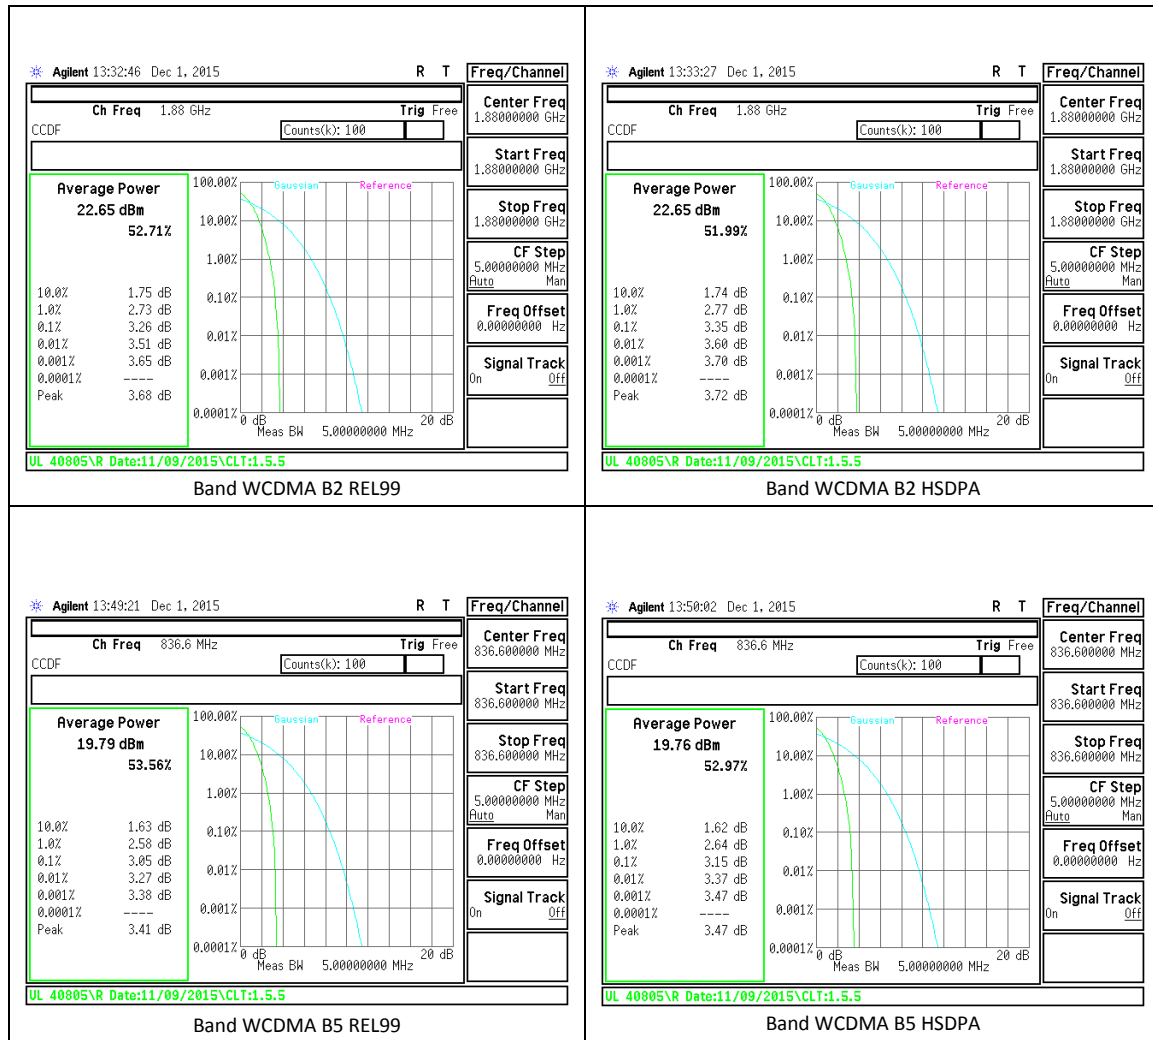



LTE Band 2

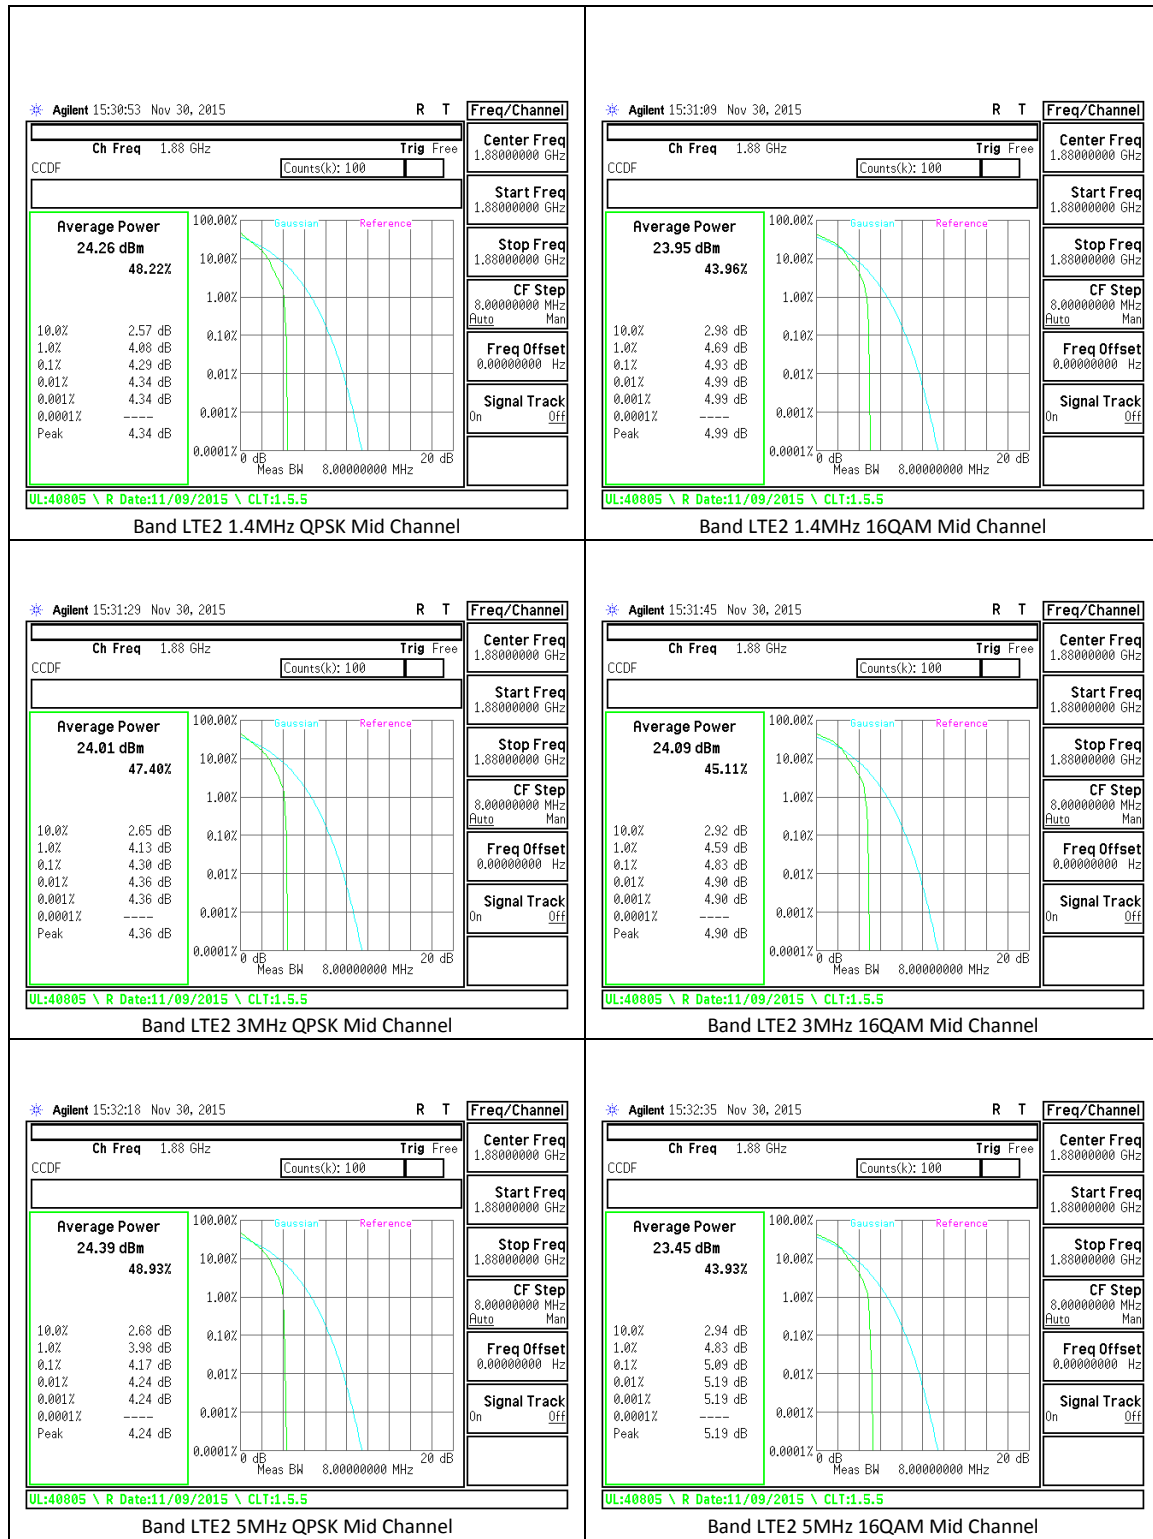

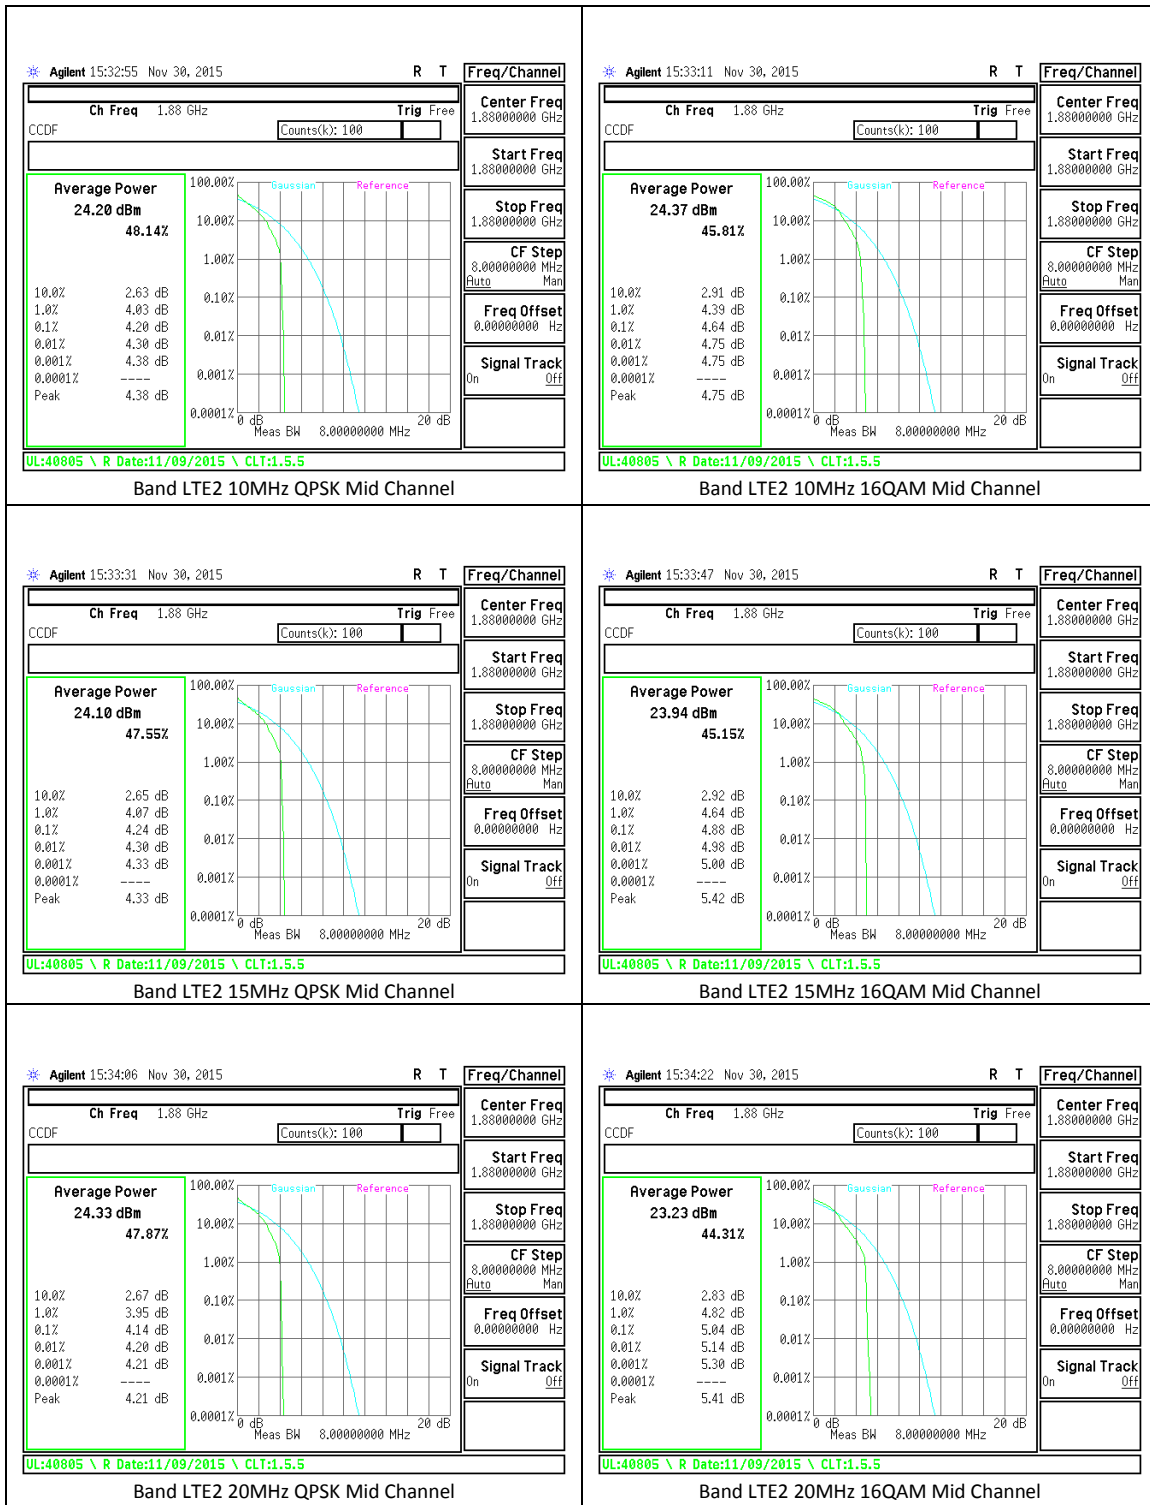



LTE Band 4

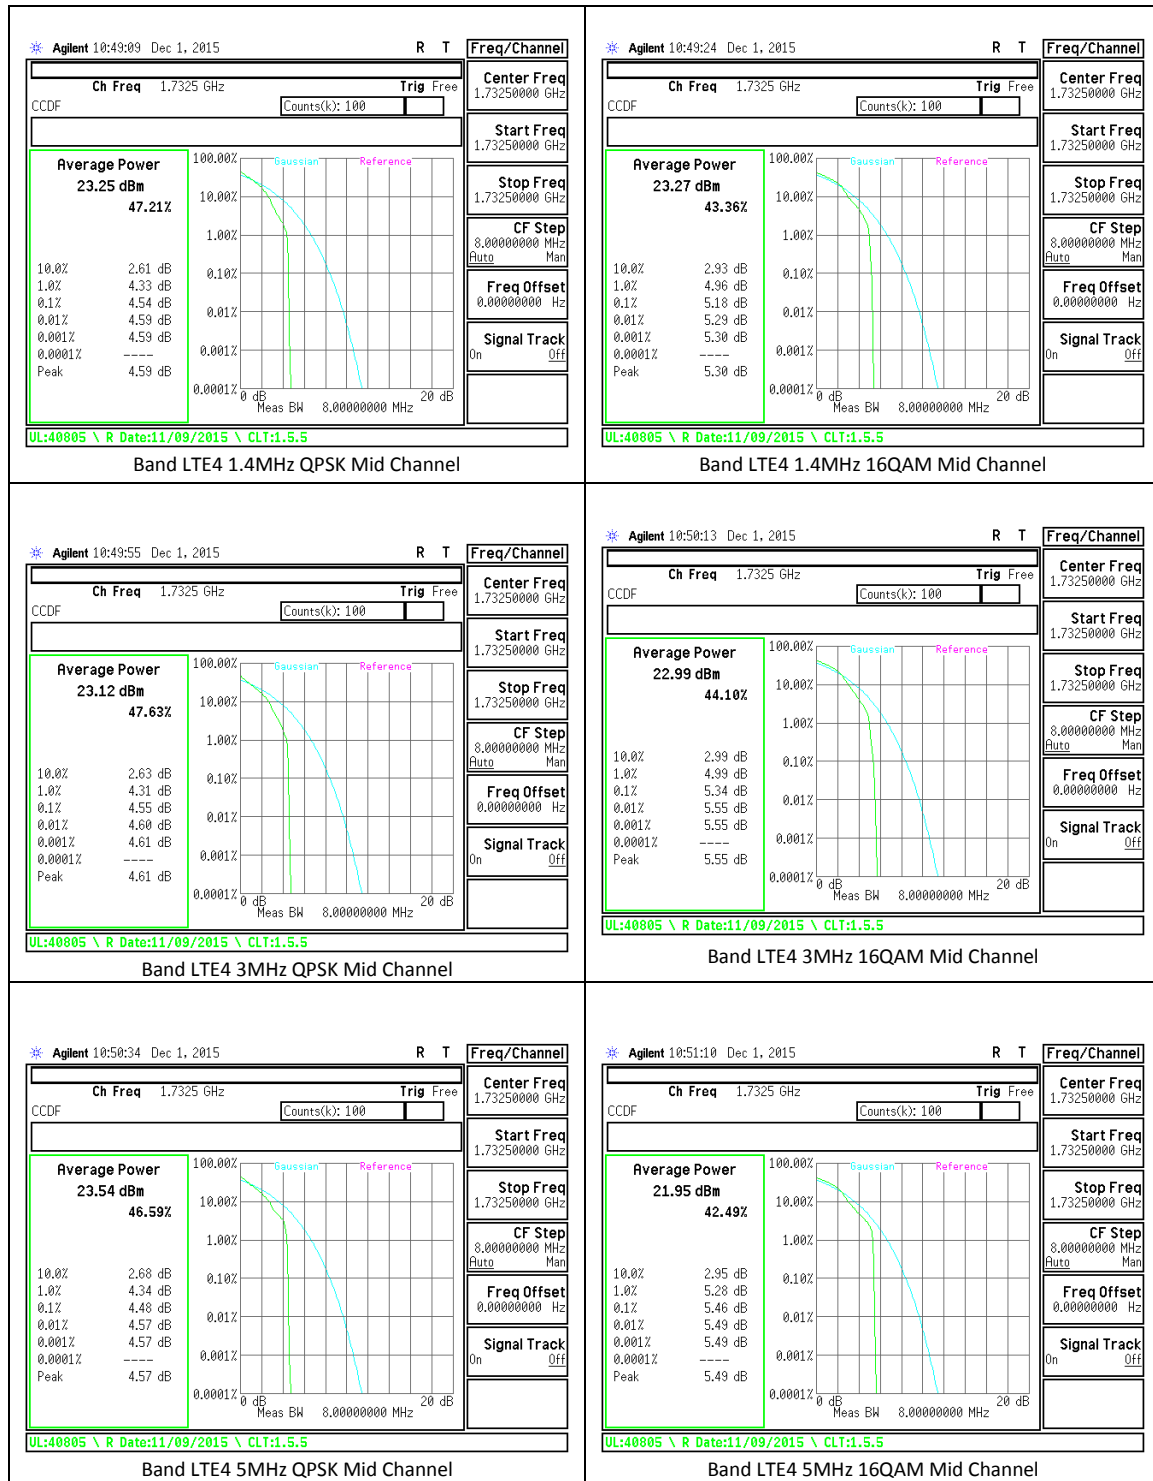

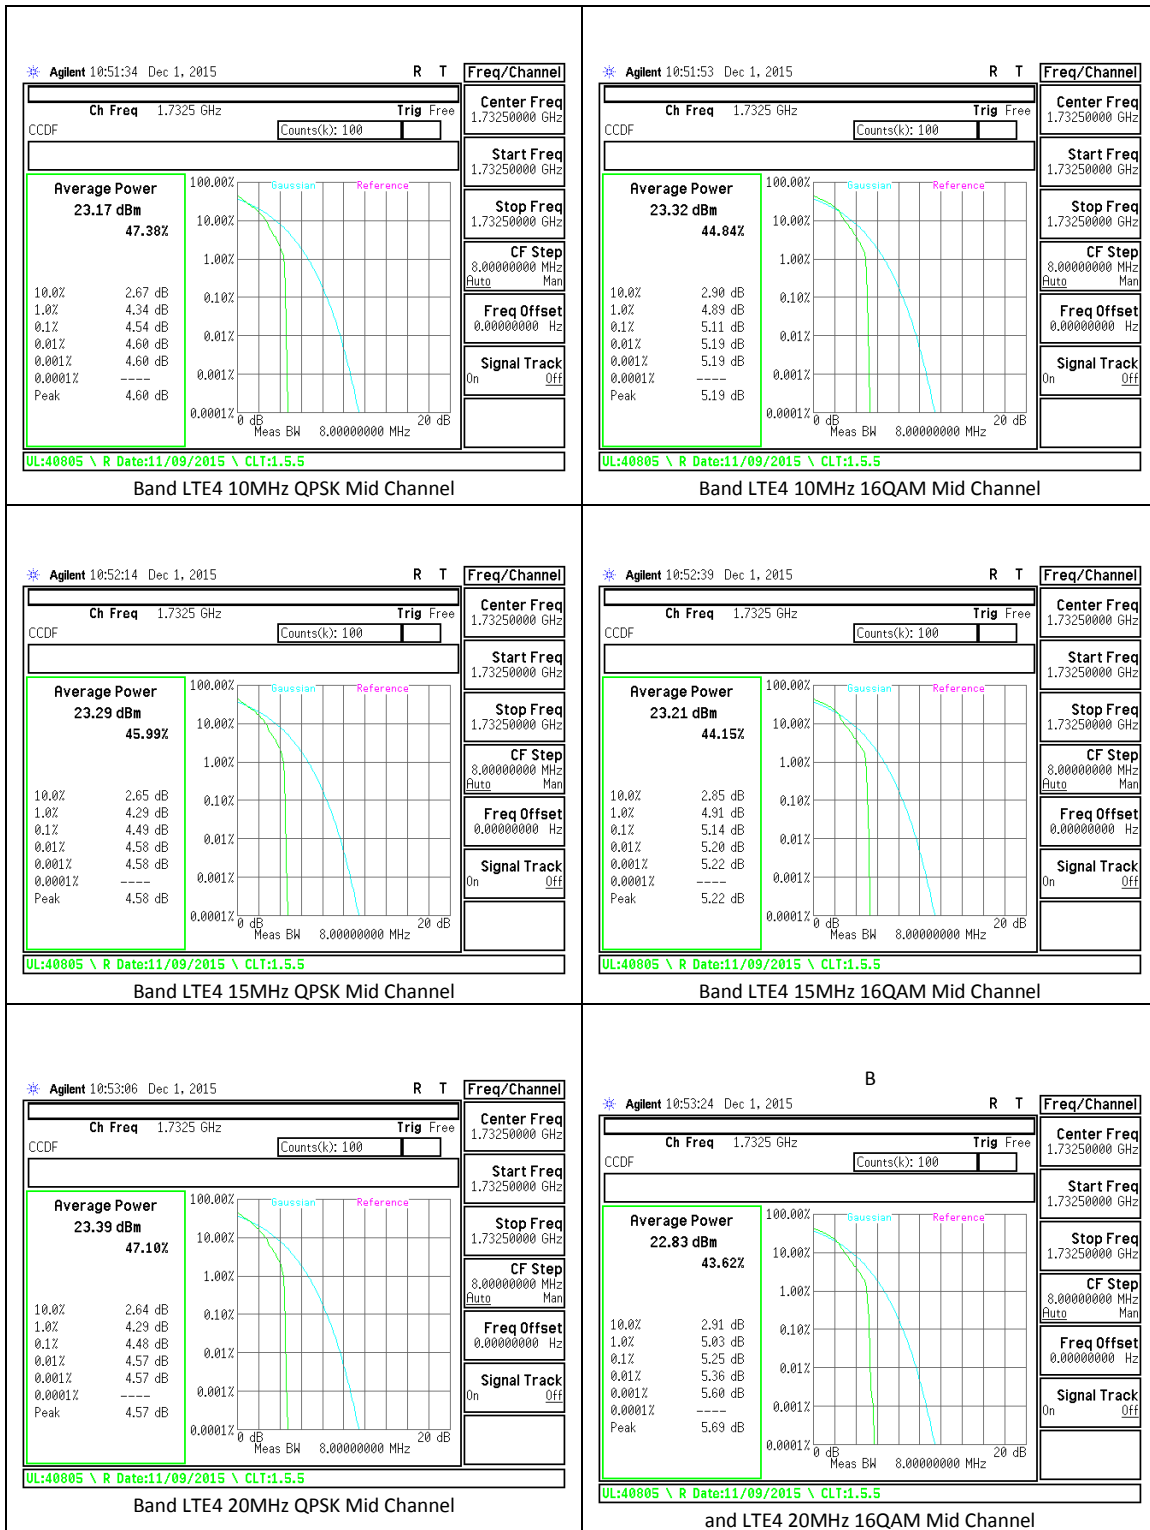


LTE Band 5

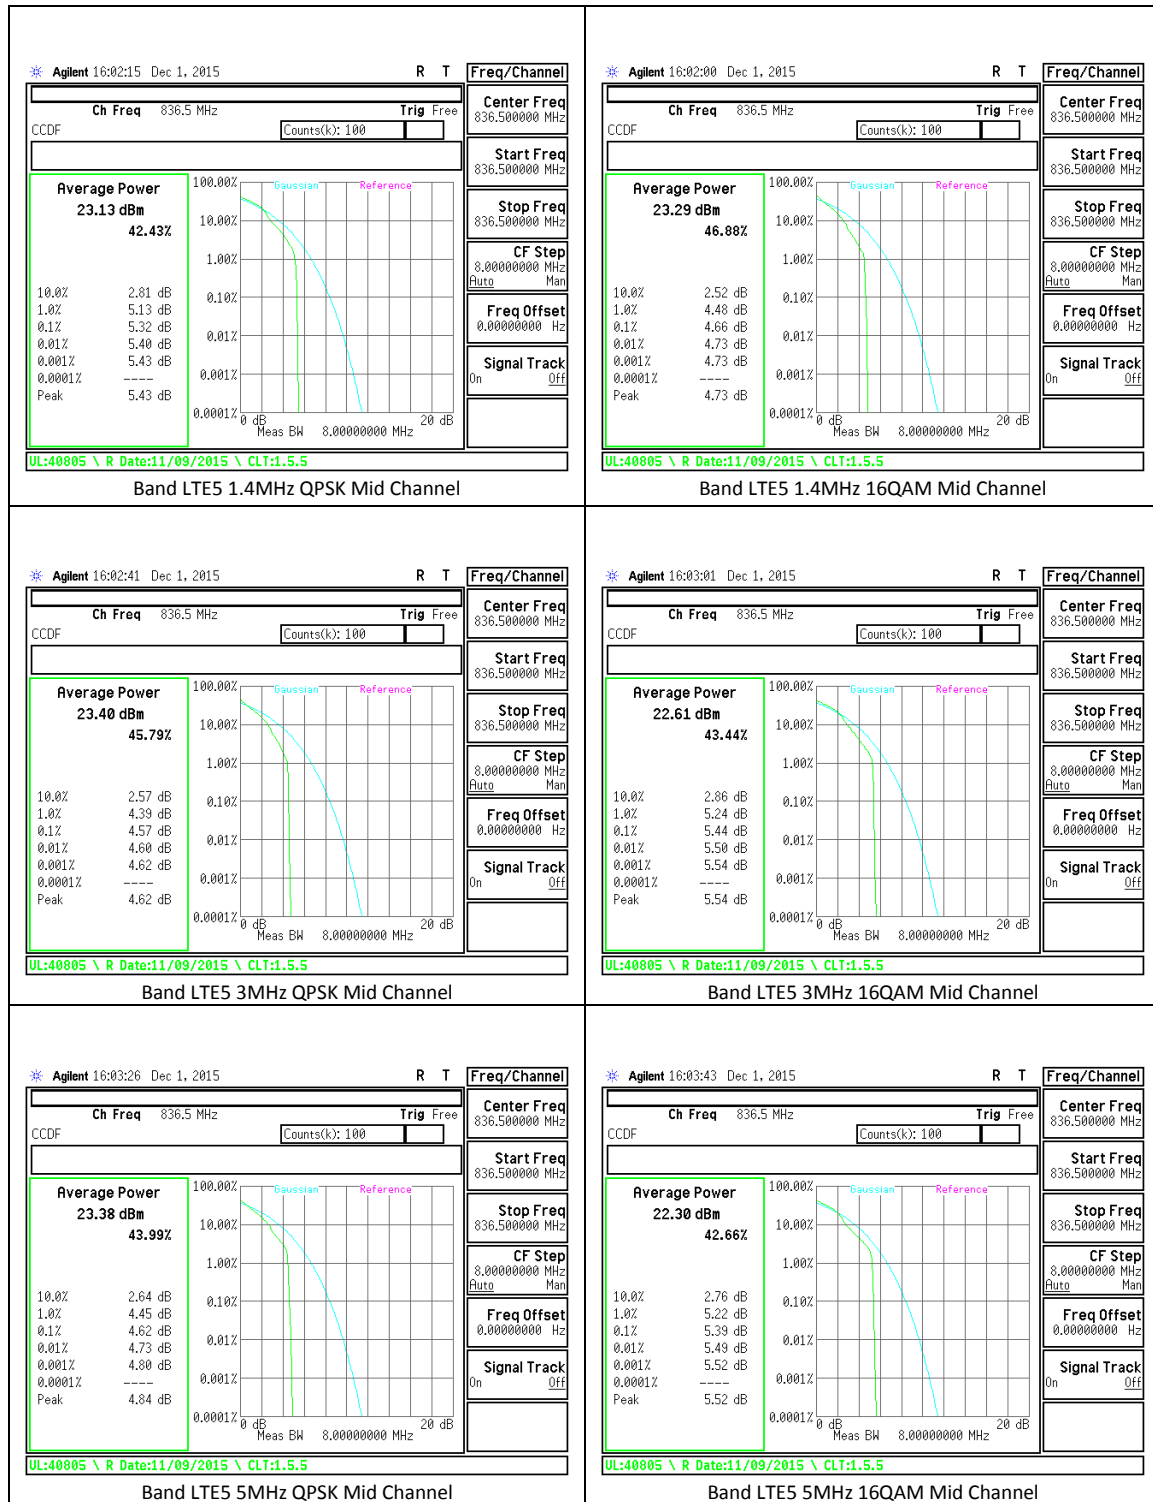

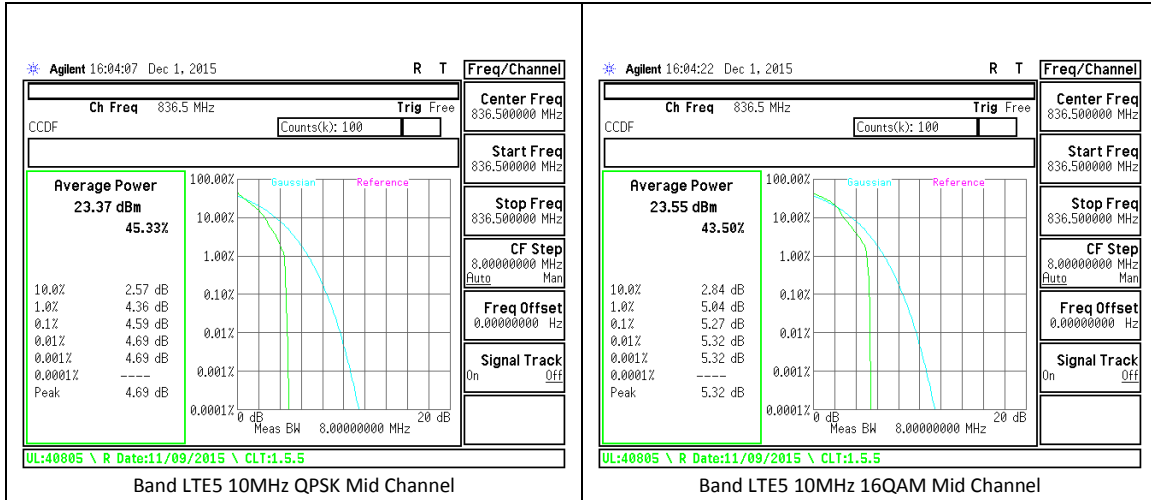

LTE Band 17

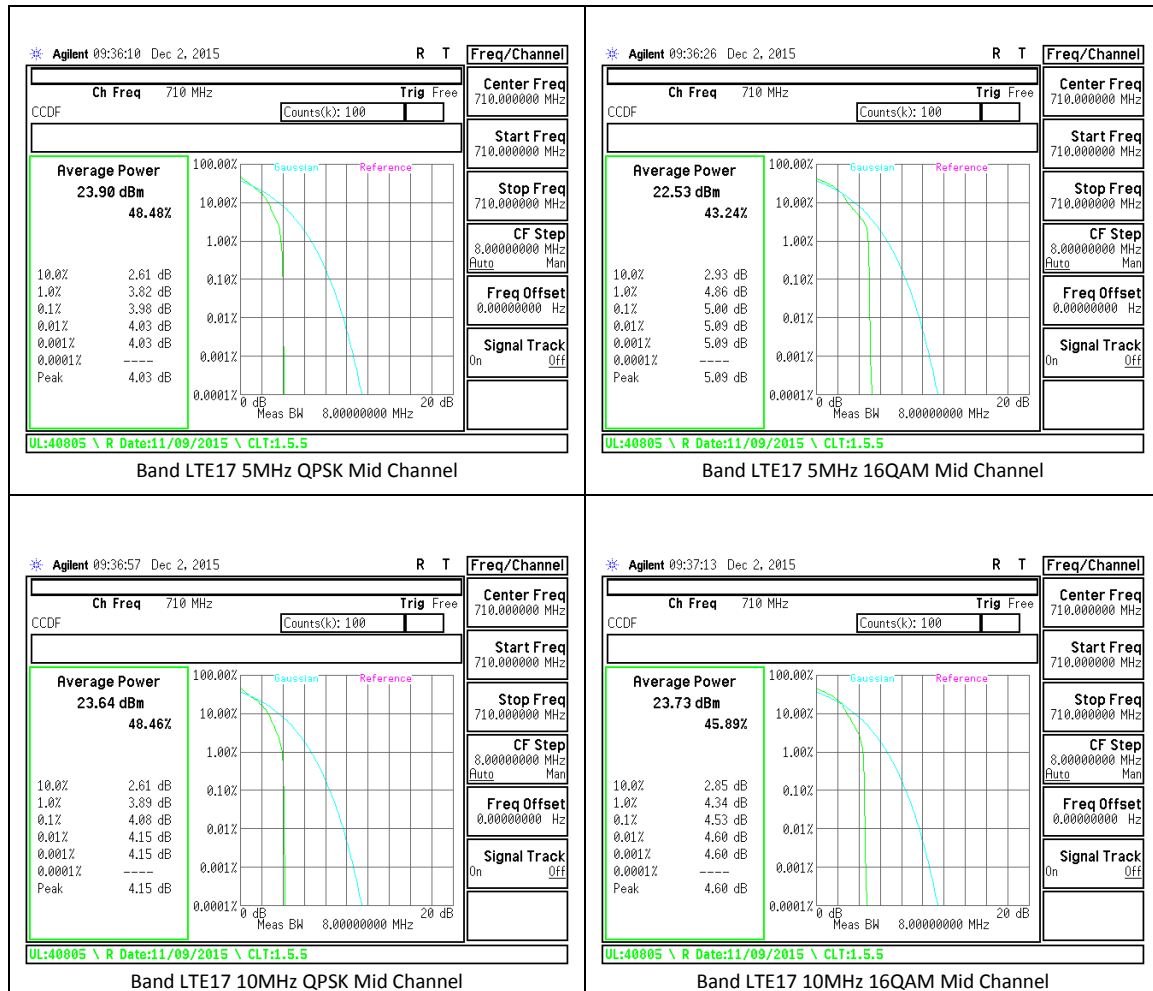

10. LIMITS AND CONDUCTED RESULTS

10.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE


The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

(KDB 971168 D01 Power Meas License Digital Systems v02r02)

10.1.1. OCCUPIED BANDWIDTH RESULTS AND PLOTS


GSM

Band	Mode	Channel	f (MHz)	99% BW (kHz)	-26dB (kHz)
GSM 850	GPRS	128	824.2	246.1	314.4
		190	836.6	243.3	317.6
		251	848.8	246	316.1
	EGPRS	128	824.2	238.2	302.8
		190	836.6	238.5	296.1
		251	848.8	240.7	302.2
GSM 1900	GPRS	512	1850.2	246	316.7
		661	1880	243	311.4
		810	1909.8	248.5	317.4
	EGPRS	512	1850.2	239	312.2
		661	1880	241.2	300.2
		810	1909.8	244.5	311.7

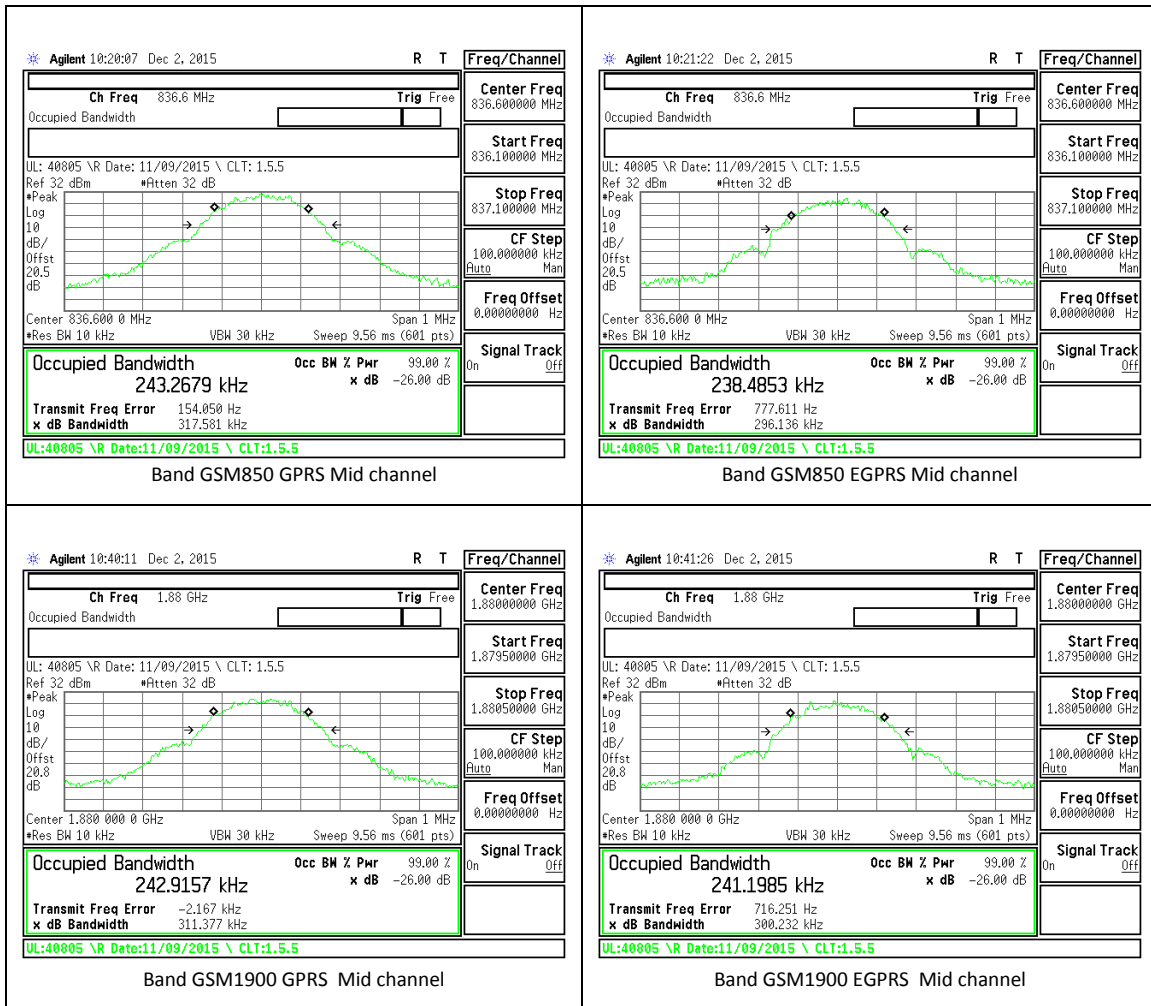


WCDMA


Band	Mode	Channel	f (MHz)	99% BW (MHz)	-26dB (MHz)
Band 2	REL99	9262	1852.4	4.18	4.636
		9400	1880	4.168	4.631
		9538	1907.6	4.174	4.634
	HSDPA	9262	1852.4	4.192	4.602
		9400	1880	4.184	4.643
		9538	1907.6	4.182	4.62
Band 5	REL99	4132	826.4	4.165	4.656
		4183	836.6	4.152	4.662
		4233	846.6	4.166	4.66
	HSDPA	4132	826.4	4.167	4.655
		4183	836.6	4.147	4.633
		4233	846.6	4.154	4.646

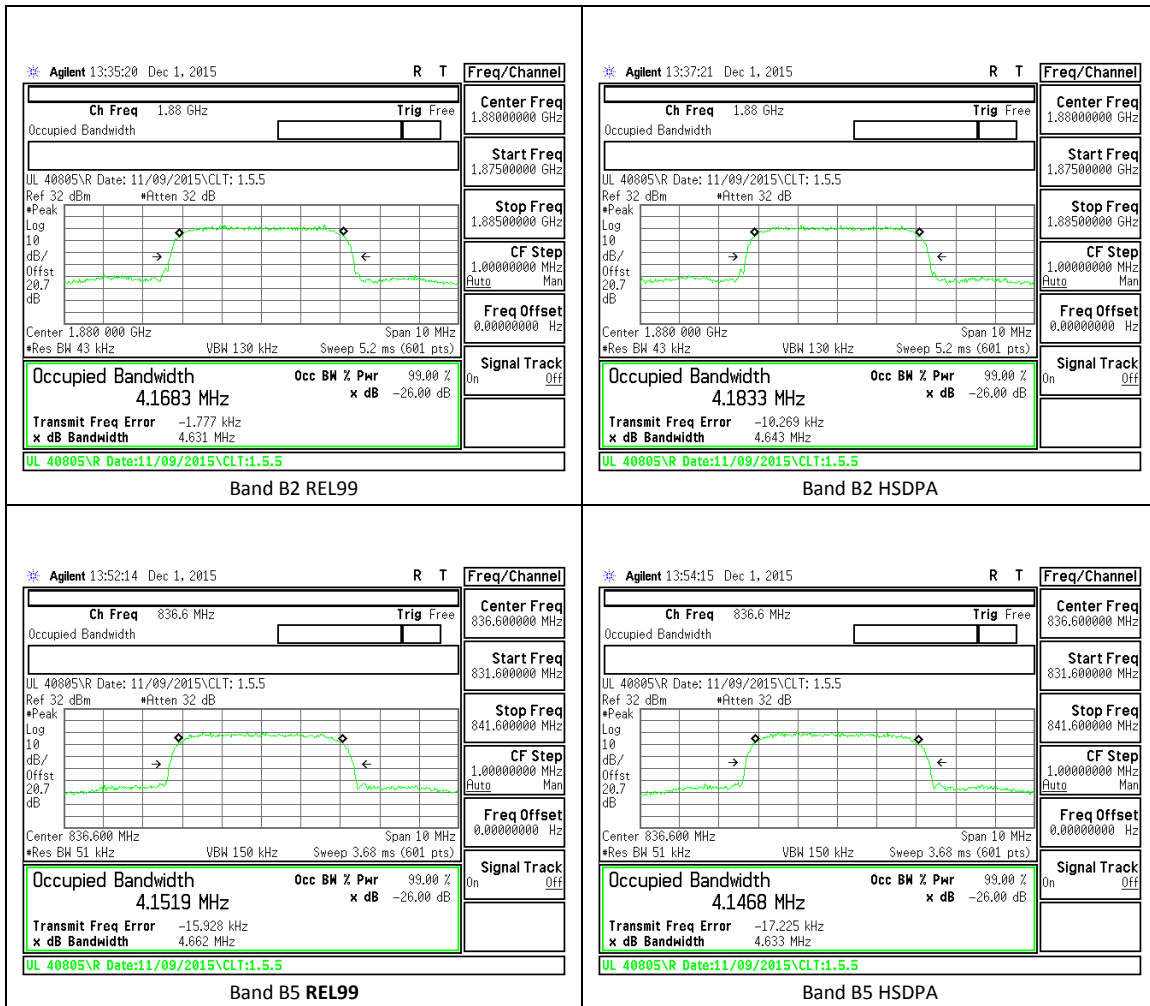

LTE Band 2


BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
1.4	QPSK	6/0	1850.7	1.086	1.27
		6/0	1880	1.079	1.246
		6/0	1909.3	1.084	1.305
	16QAM	6/0	1850.7	1.082	1.272
		6/0	1880	1.08	1.275
		6/0	1909.3	1.092	1.303
3	QPSK	15/0	1851.5	2.684	2.97
		15/0	1880	2.689	2.977
		15/0	1908.5	2.69	2.996
	16QAM	15/0	1851.5	2.695	2.944
		15/0	1880	2.684	2.969
		15/0	1908.5	2.684	2.987
5	QPSK	25/0	1852.5	4.497	4.943
		25/0	1880	4.503	4.949
		25/0	1907.5	4.502	4.932
	16QAM	25/0	1852.5	4.517	5.019
		25/0	1880	4.496	4.934
		25/0	1907.5	4.496	4.947
10	QPSK	50/0	1855	8.966	9.641
		50/0	1880	8.971	9.809
		50/0	1905	8.983	9.888
	16QAM	50/0	1855	8.965	9.767
		50/0	1880	8.962	9.681
		50/0	1905	8.996	9.746
15	QPSK	75/0	1857.5	13.415	14.241
		75/0	1880	13.410	14.448
		75/0	1902.5	13.46.	14.559
	16QAM	75/0	1857.5	13.402	14.583
		75/0	1880	13.424	14.517
		75/0	1902.5	13.438	14.472
20	QPSK	100/0	1860	17.882	19.146
		100/0	1880	17.851	19.224
		100/0	1900	17.872	19.432
	16QAM	100/0	1860	17.844	19.828
		100/0	1880	17.889	19.330
		100/0	1900	17.867	19.319

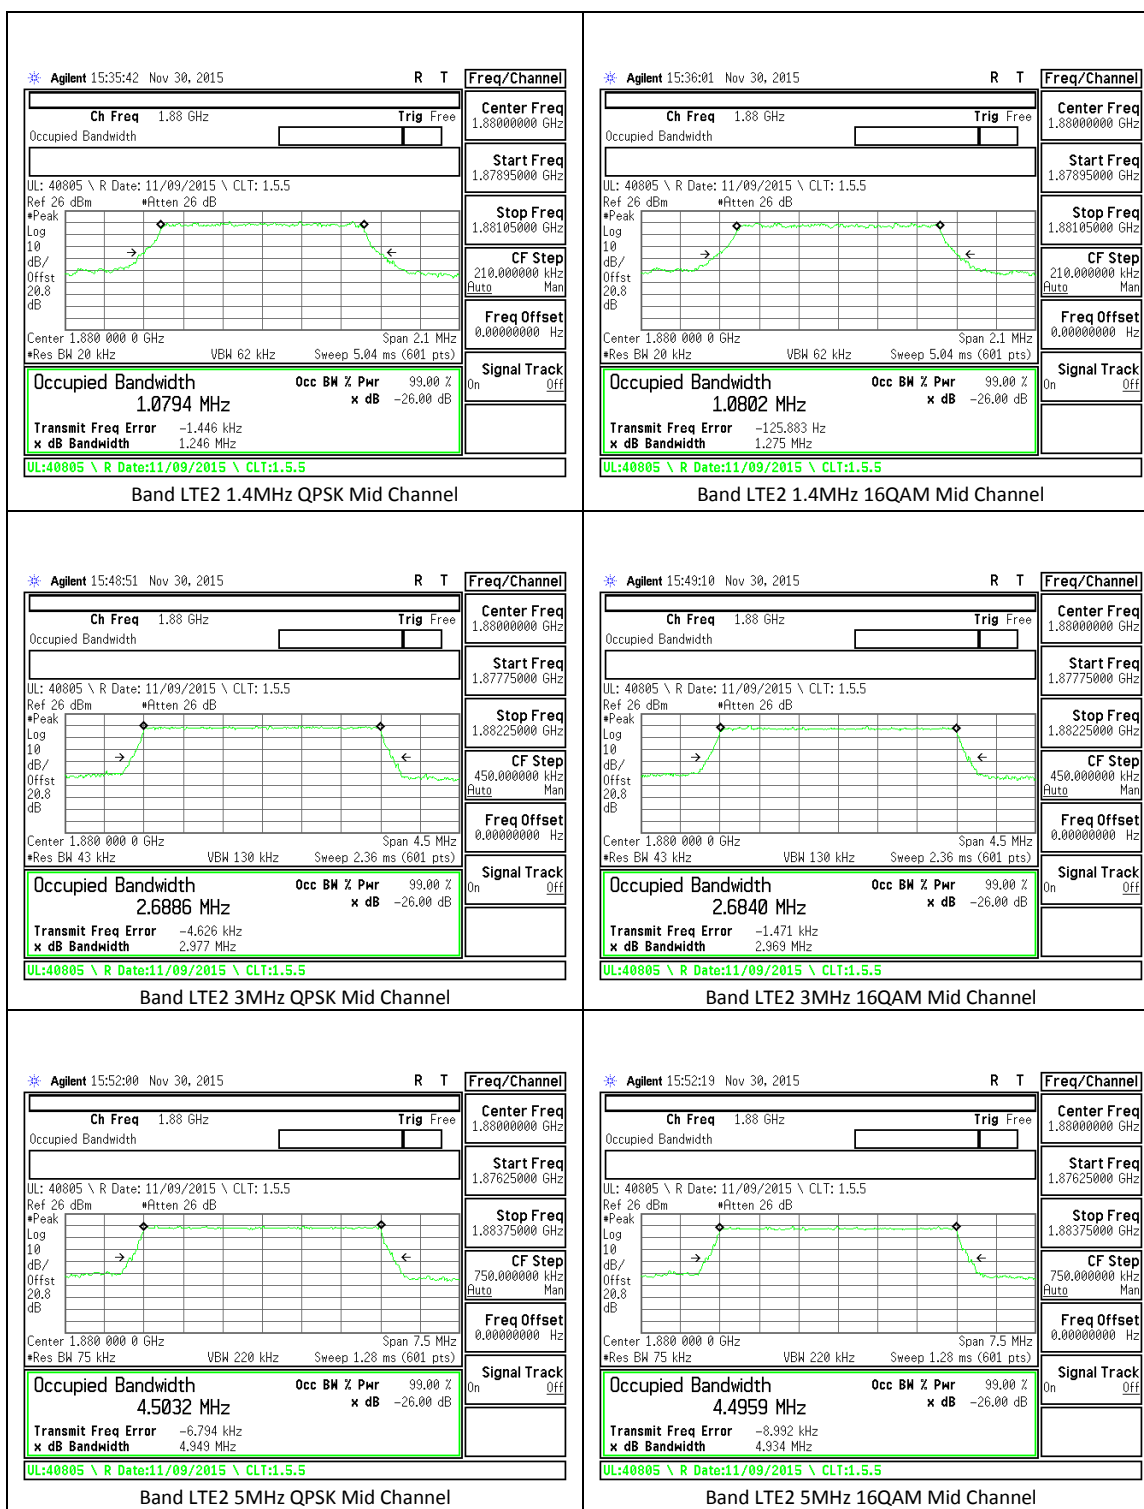


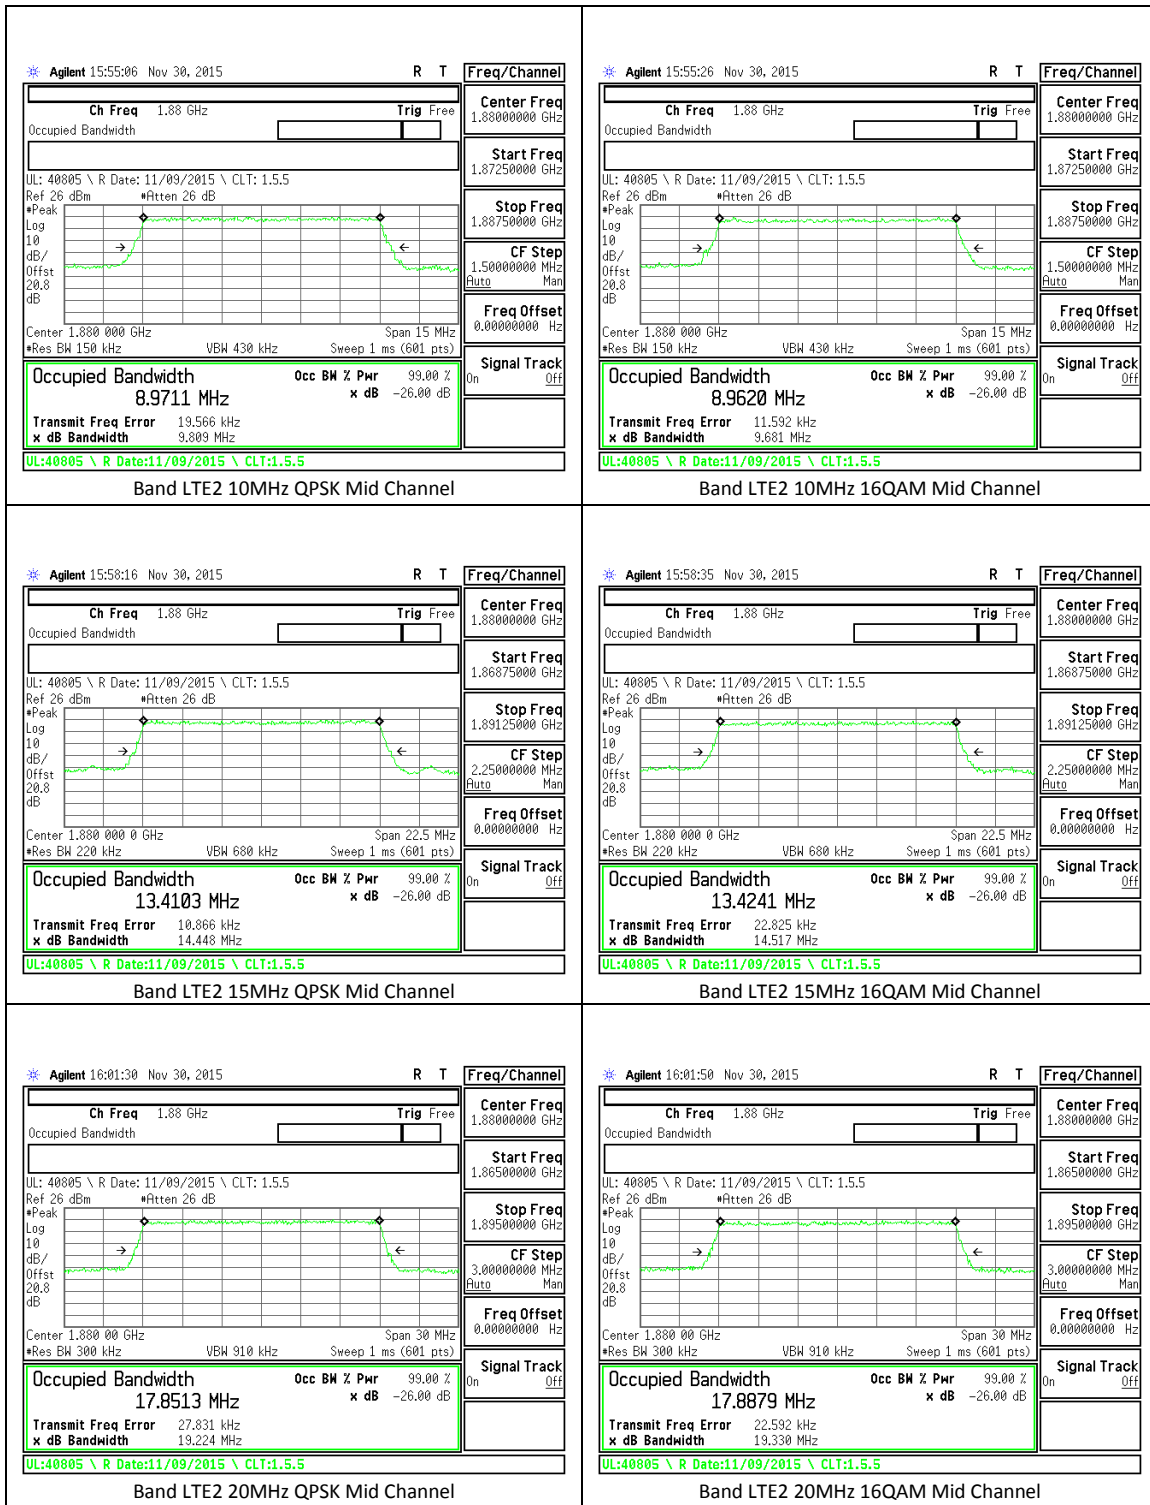

LTE Band 4


BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
1.4	QPSK	6/0	1710.7	1.086	1.265
		6/0	1732.5	1.081	1.253
		6/0	1754.3	1.087	1.264
	16QAM	6/0	1710.7	1.08	1.263
		6/0	1732.5	1.086	1.282
		6/0	1754.3	1.084	1.291
3	QPSK	15/0	1711.5	2.691	2.952
		15/0	1732.5	2.693	2.977
		15/0	1753.5	2.69	2.957
	16QAM	15/0	1711.5	2.691	2.95
		15/0	1732.5	2.69	2.962
		15/0	1753.5	2.683	2.965
5	QPSK	25/0	1712.5	4.492	4.981
		25/0	1732.5	4.5	5.019
		25/0	1752.5	4.511	4.905
	16QAM	25/0	1712.5	4.516	4.929
		25/0	1732.5	4.503	4.972
		25/0	1752.5	4.495	4.909
10	QPSK	50/0	1715	8.96	9.8
		50/0	1732.5	8.96	9.782
		50/0	1750	8.987	9.769
	16QAM	50/0	1715	8.956	9.682
		50/0	1732.5	8.978	9.697
		50/0	1750	8.971	9.659
15	QPSK	75/0	1717.5	13.368	14.666
		75/0	1732.5	13.403	14.417
		75/0	1747.5	13.435	14.595
	16QAM	75/0	1717.5	13.435	14.456
		75/0	1732.5	13.466	14.535
		75/0	1747.5	13.420	14.382
20	QPSK	100/0	1720	17.853	19.101
		100/0	1732.5	17.888	19.207
		100/0	1745	17.863	19.242
	16QAM	100/0	1720	17.851	19.288
		100/0	1732.5	17.897	19.226
		100/0	1745	17.875	19.280

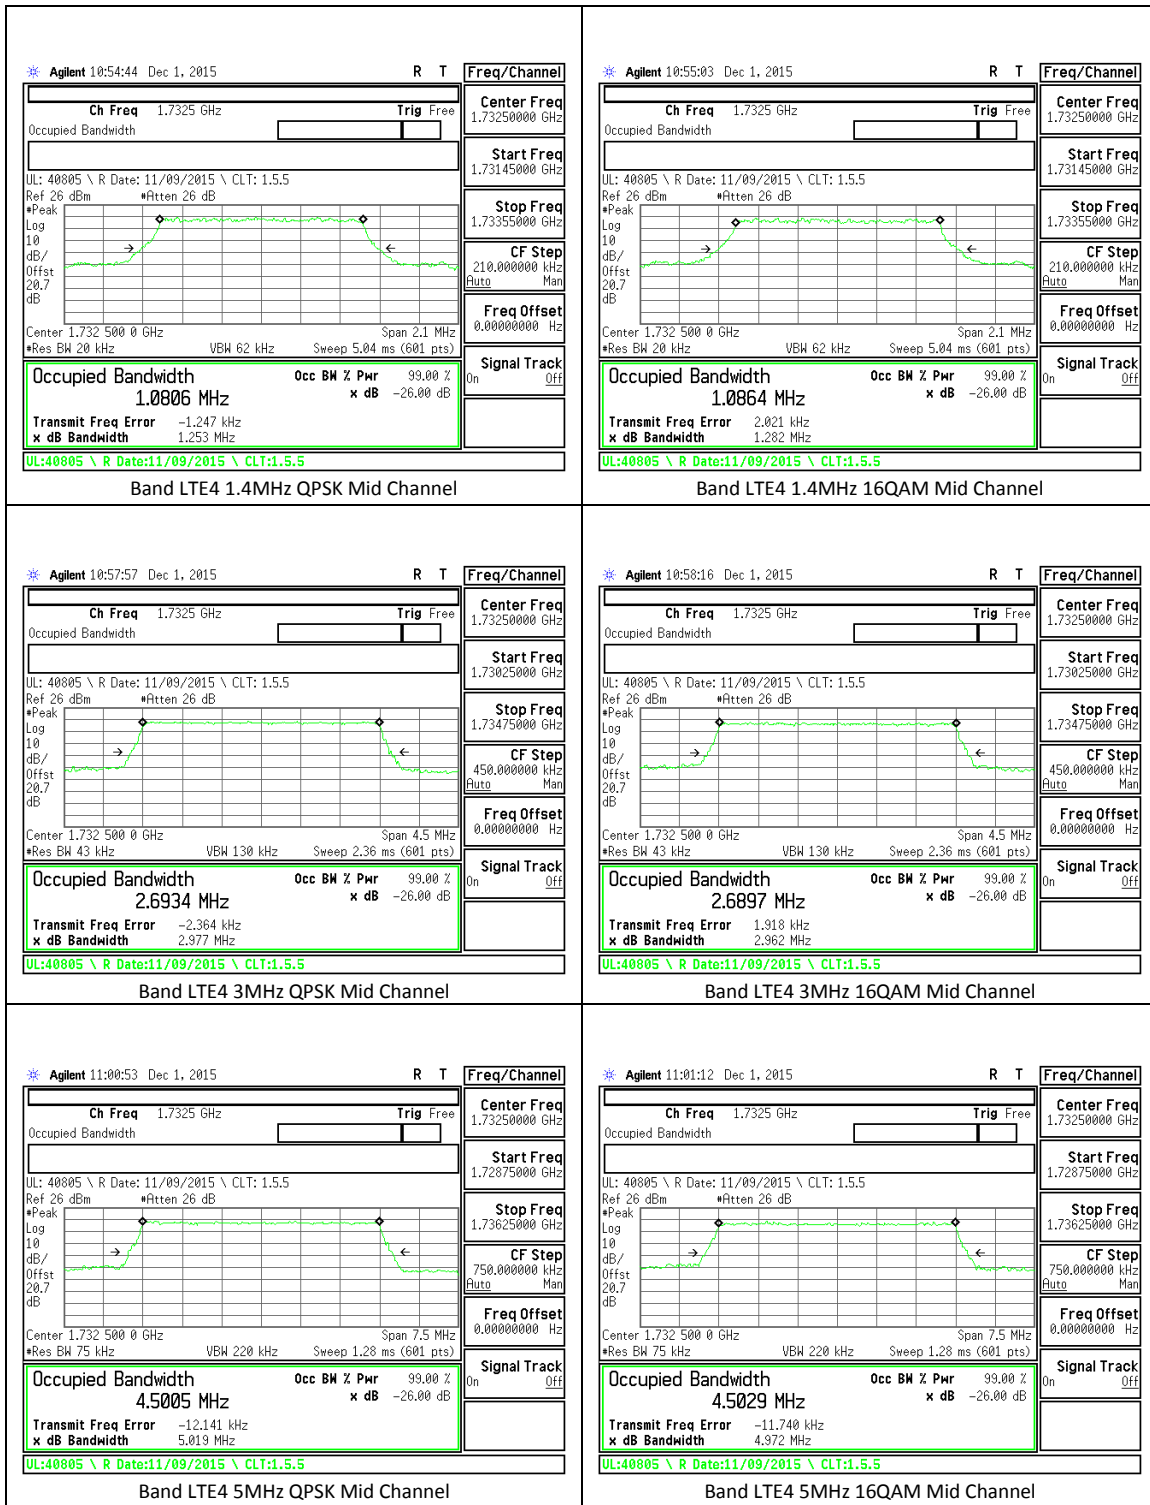


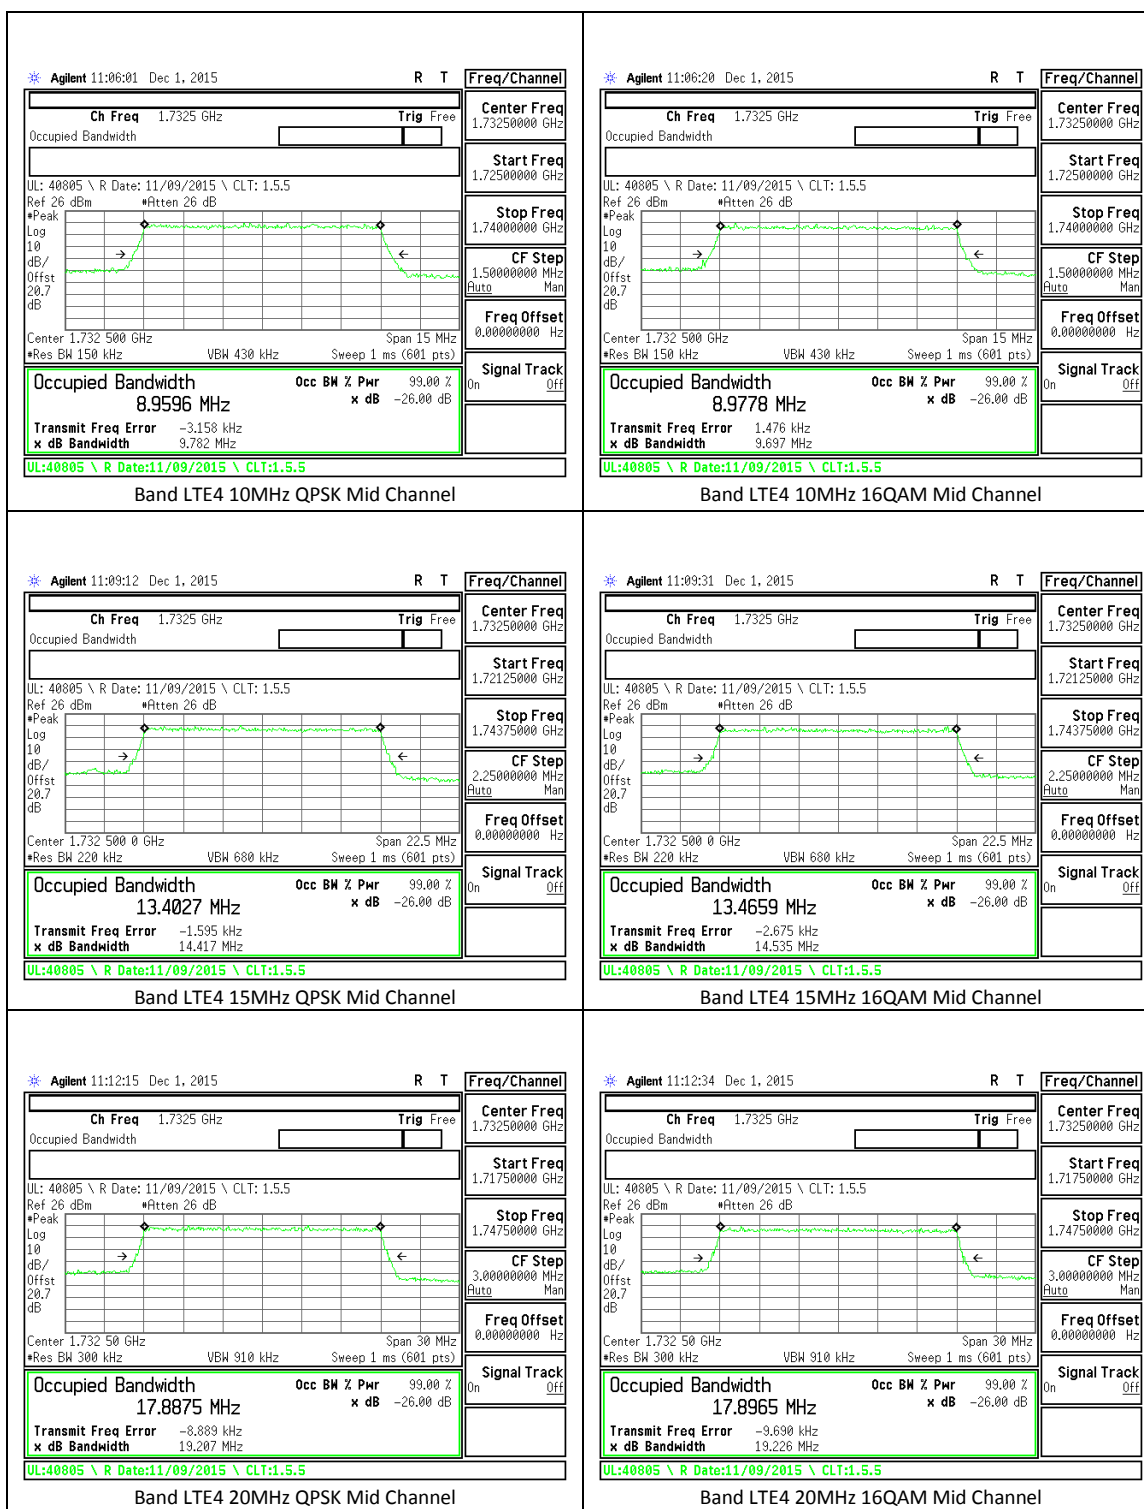

LTE Band 5

BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
1.4	QPSK	6/0	824.7	1.083	1.266
		6/0	836.5	1.079	1.257
		6/0	848.3	1.084	1.261
	16QAM	6/0	824.7	1.084	1.277
		6/0	836.5	1.085	1.273
		6/0	848.3	1.09	1.287
3	QPSK	15/0	825.5	2.68	2.959
		15/0	836.5	2.688	2.927
		15/0	847.5	2.69	2.946
	16QAM	15/0	825.5	2.688	2.952
		15/0	836.5	2.684	2.966
		15/0	847.5	2.687	2.974
5	QPSK	25/0	826.5	4.506	4.958
		25/0	836.5	4.5	4.957
		25/0	846.5	4.492	4.943
	16QAM	25/0	826.5	4.511	4.951
		25/0	836.5	4.486	4.953
		25/0	846.5	4.494	4.941
10	QPSK	50/0	829	8.98	9.754
		50/0	836.5	8.974	9.783
		50/0	844	8.961	9.719
	16QAM	50/0	829	8.984	9.789
		50/0	836.5	8.968	9.864
		50/0	844	8.967	9.825

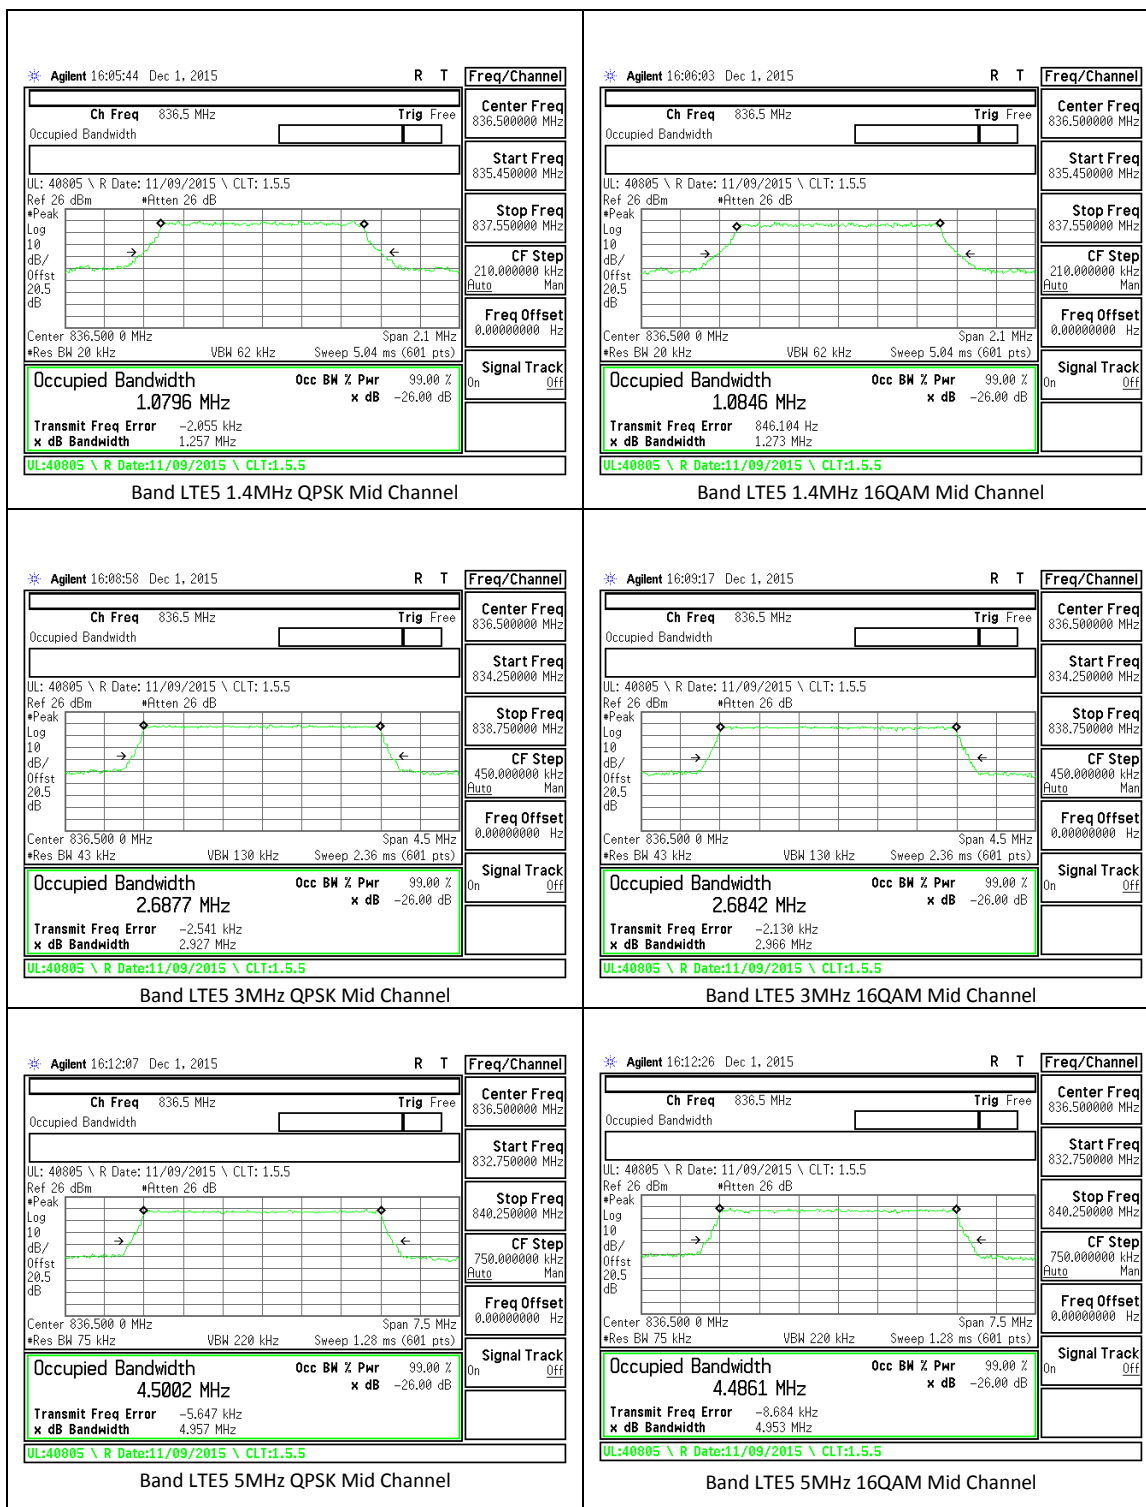

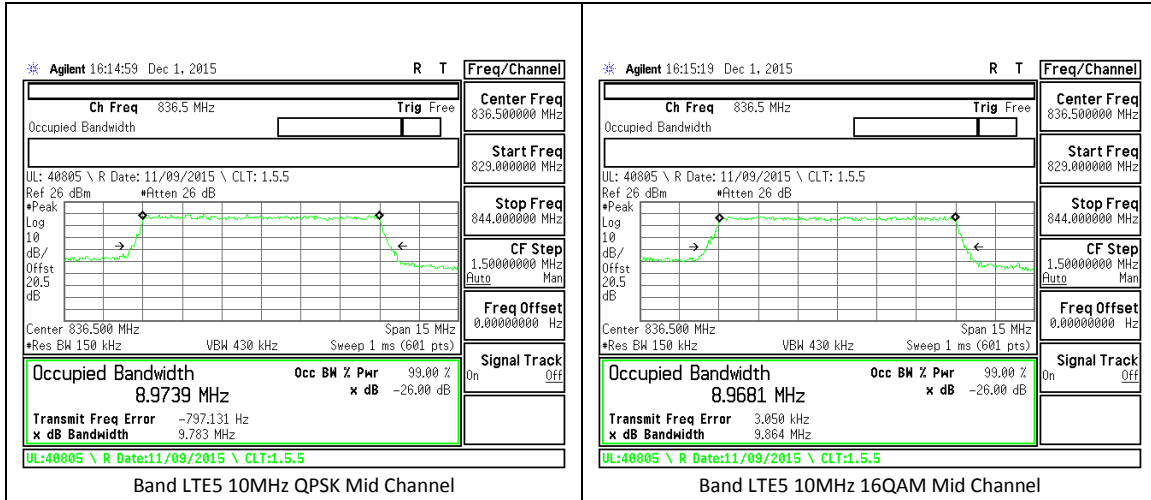

LTE Band 17

BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
5	QPSK	25/0	706.5	4.507	4.973
		25/0	710	4.503	4.985
		25/0	713.5	4.513	4.961
	16QAM	25/0	706.5	4.504	4.967
		25/0	710	4.505	4.965
		25/0	713.5	4.497	4.98
10	QPSK	50/0	709	8.982	9.794
		50/0	710	8.971	9.781
		50/0	711	8.965	9.631
	16QAM	50/0	709	8.962	9.762
		50/0	710	8.956	9.698
		50/0	711	8.992	9.82



11. BAND EDGE EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.917, §24.238, §27.53

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.


TEST PROCEDURE


Per KDB 971168 D01 Power Meas License Digital Systems v02r02

The transmitter output was connected to an Agilent 8960 or a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.


11.1.1. BAND EDGE PLOTS


GSM

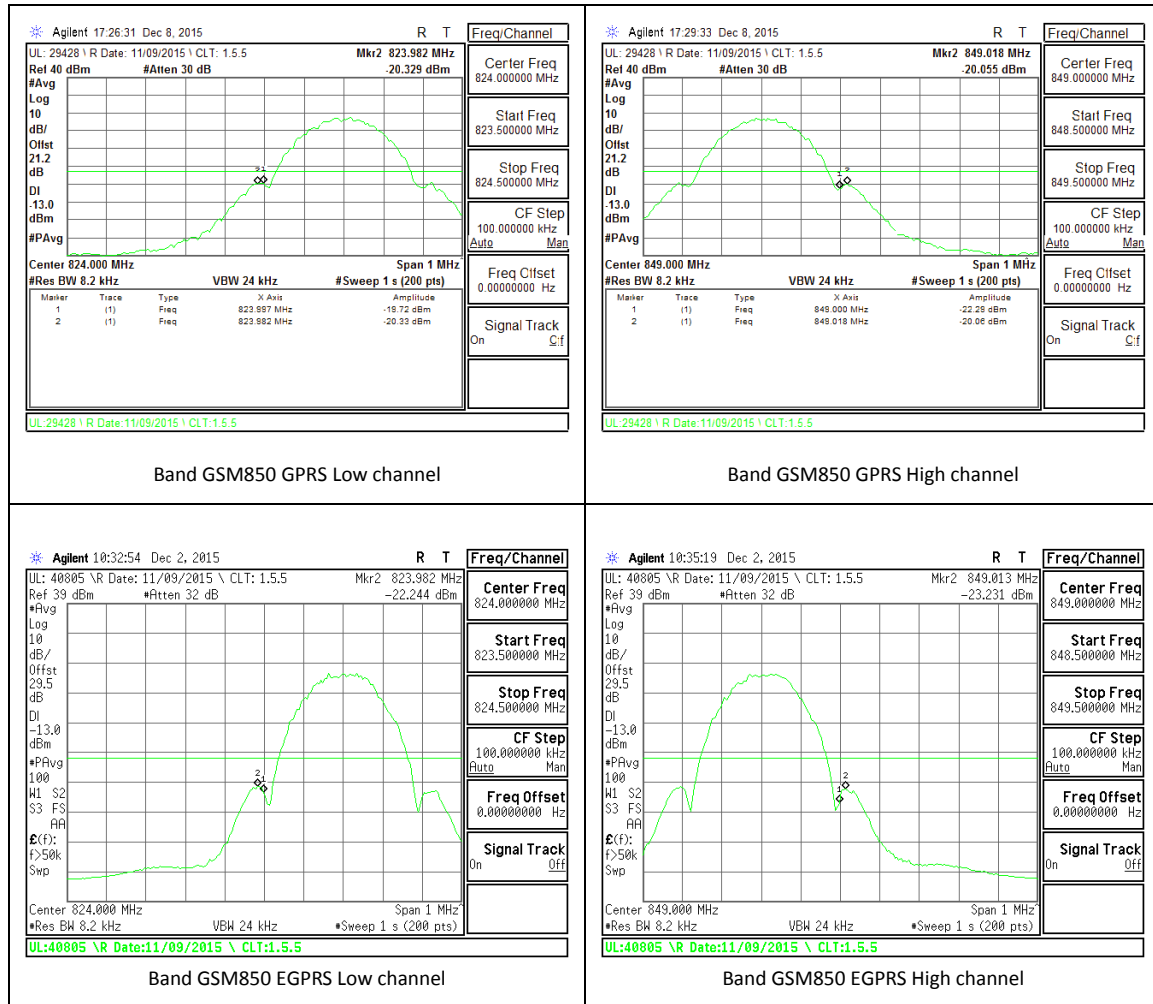

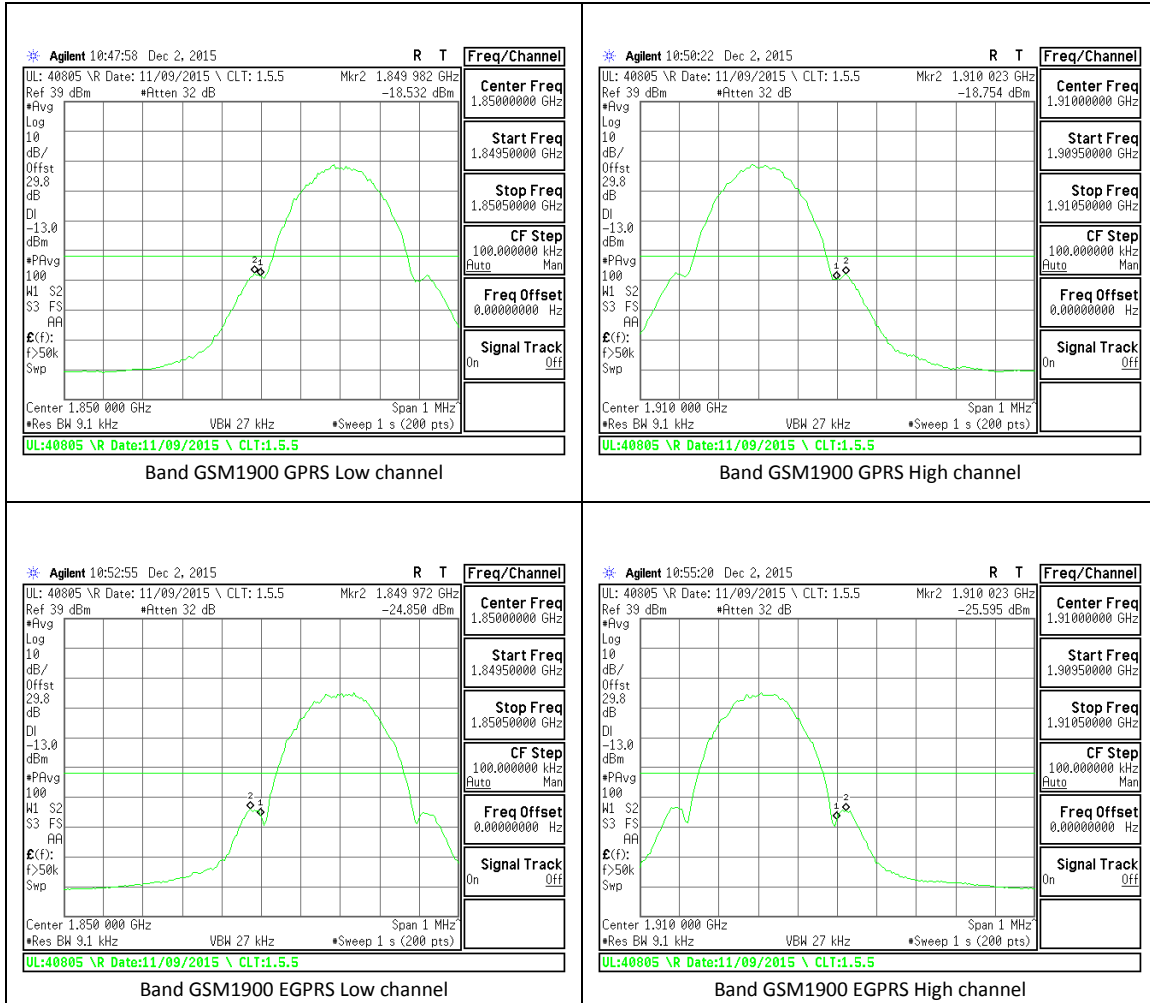



WCDMA

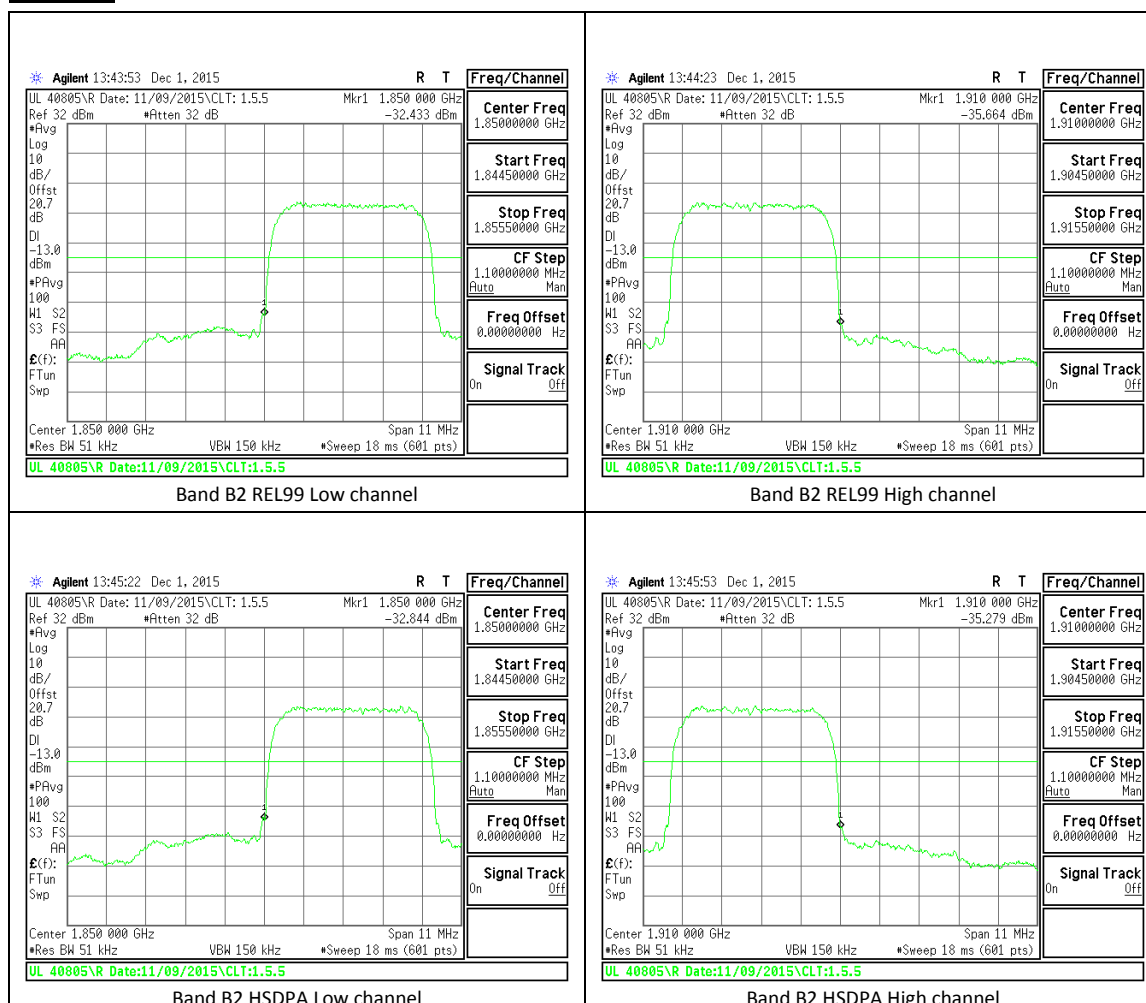


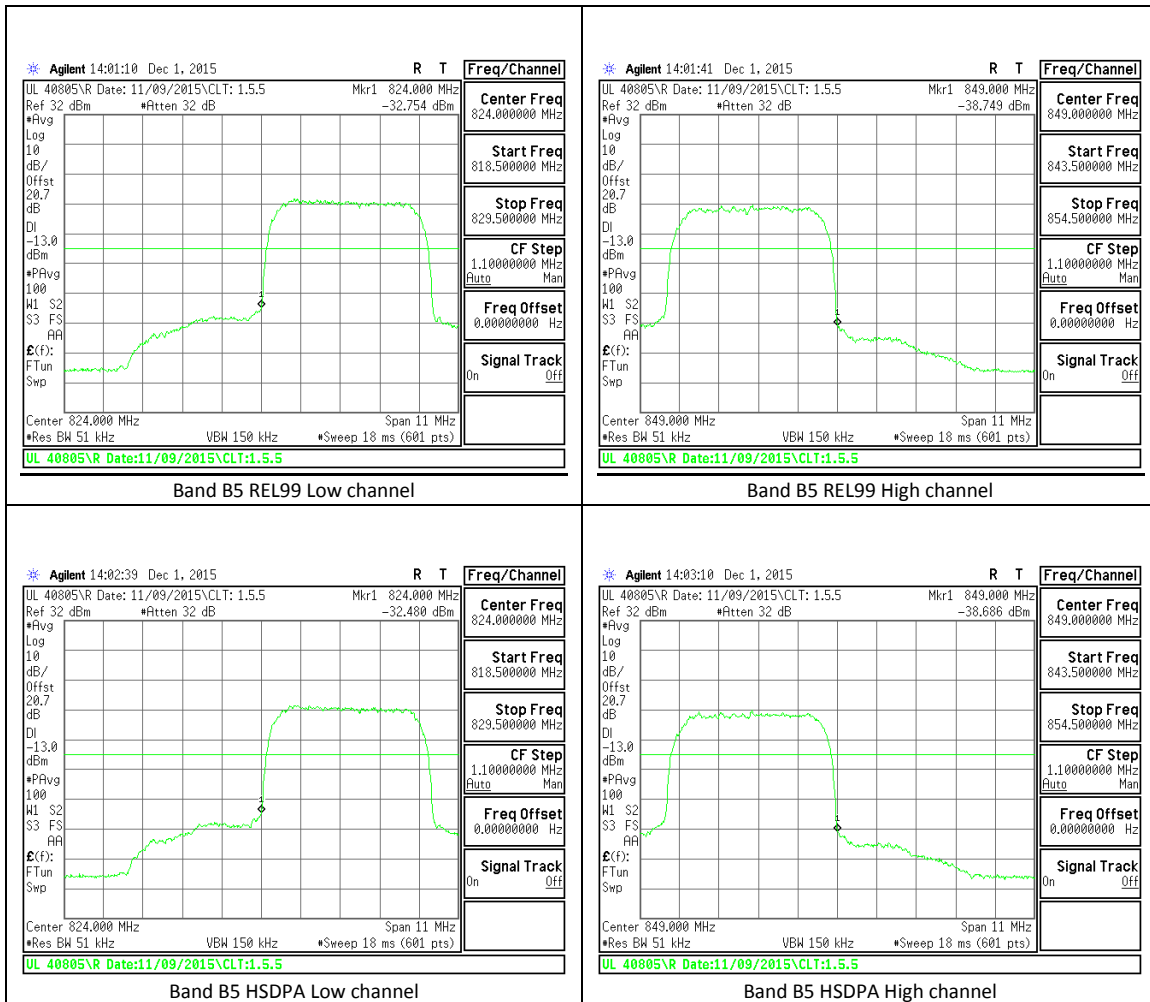



LTE Band 2

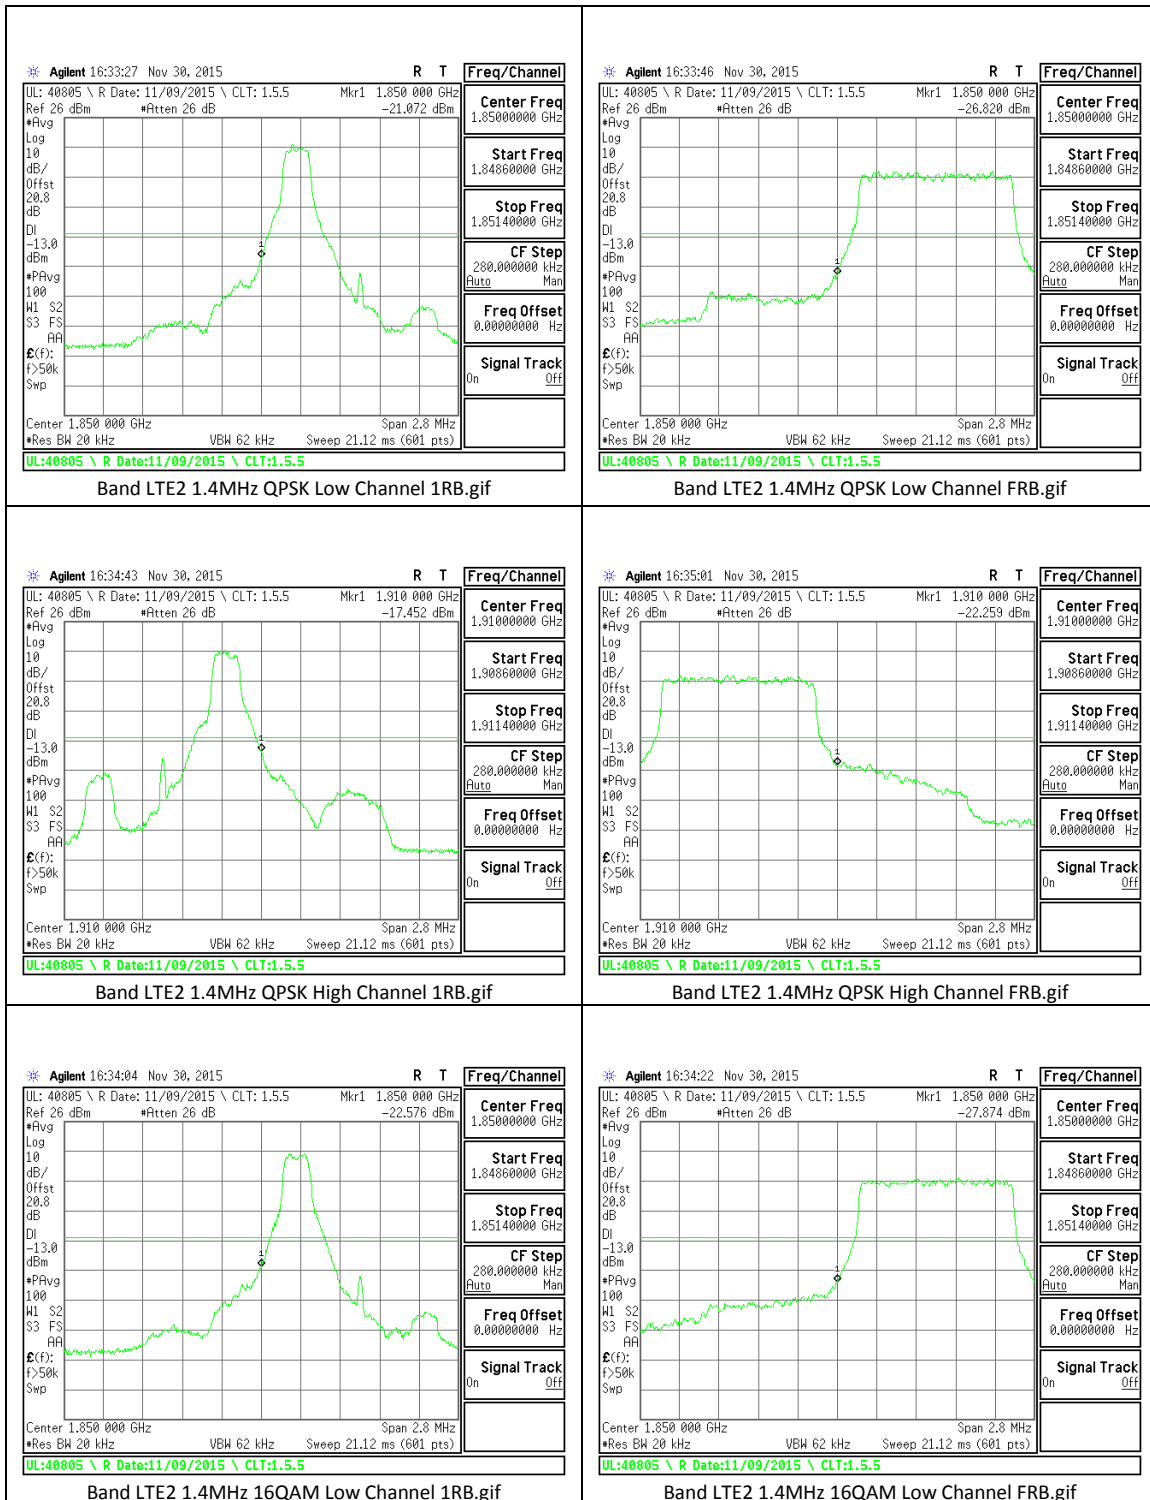


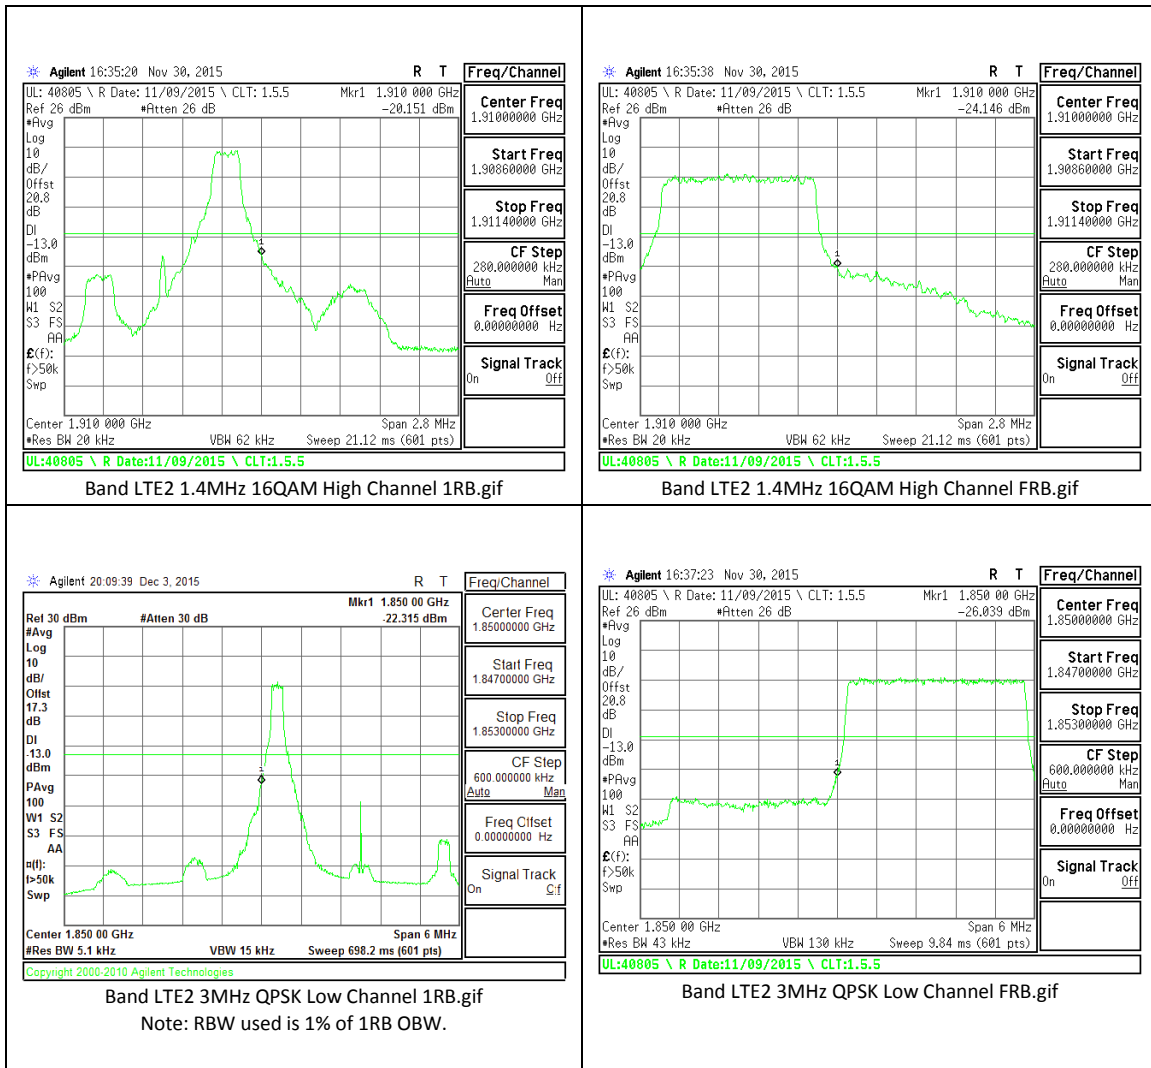


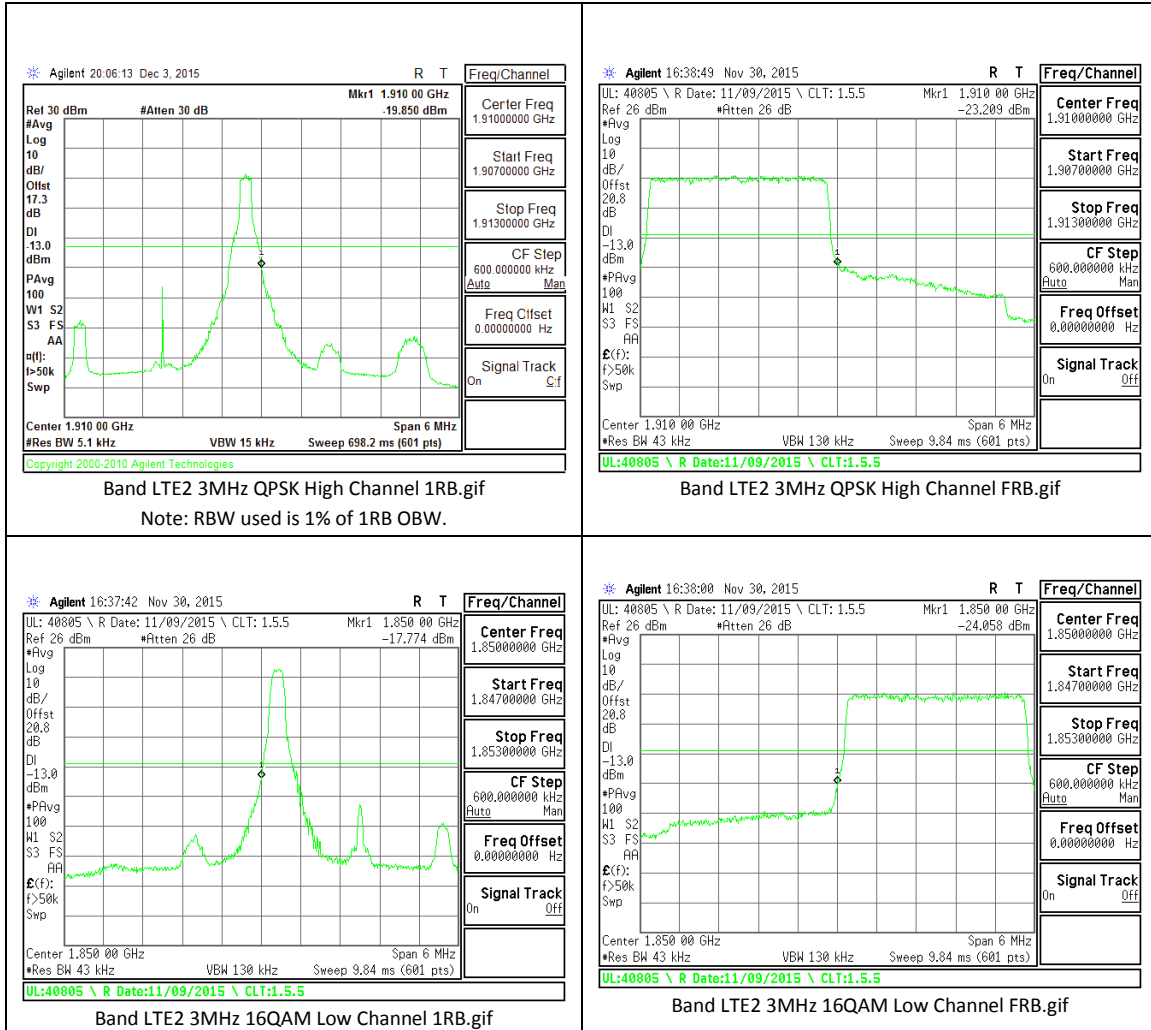


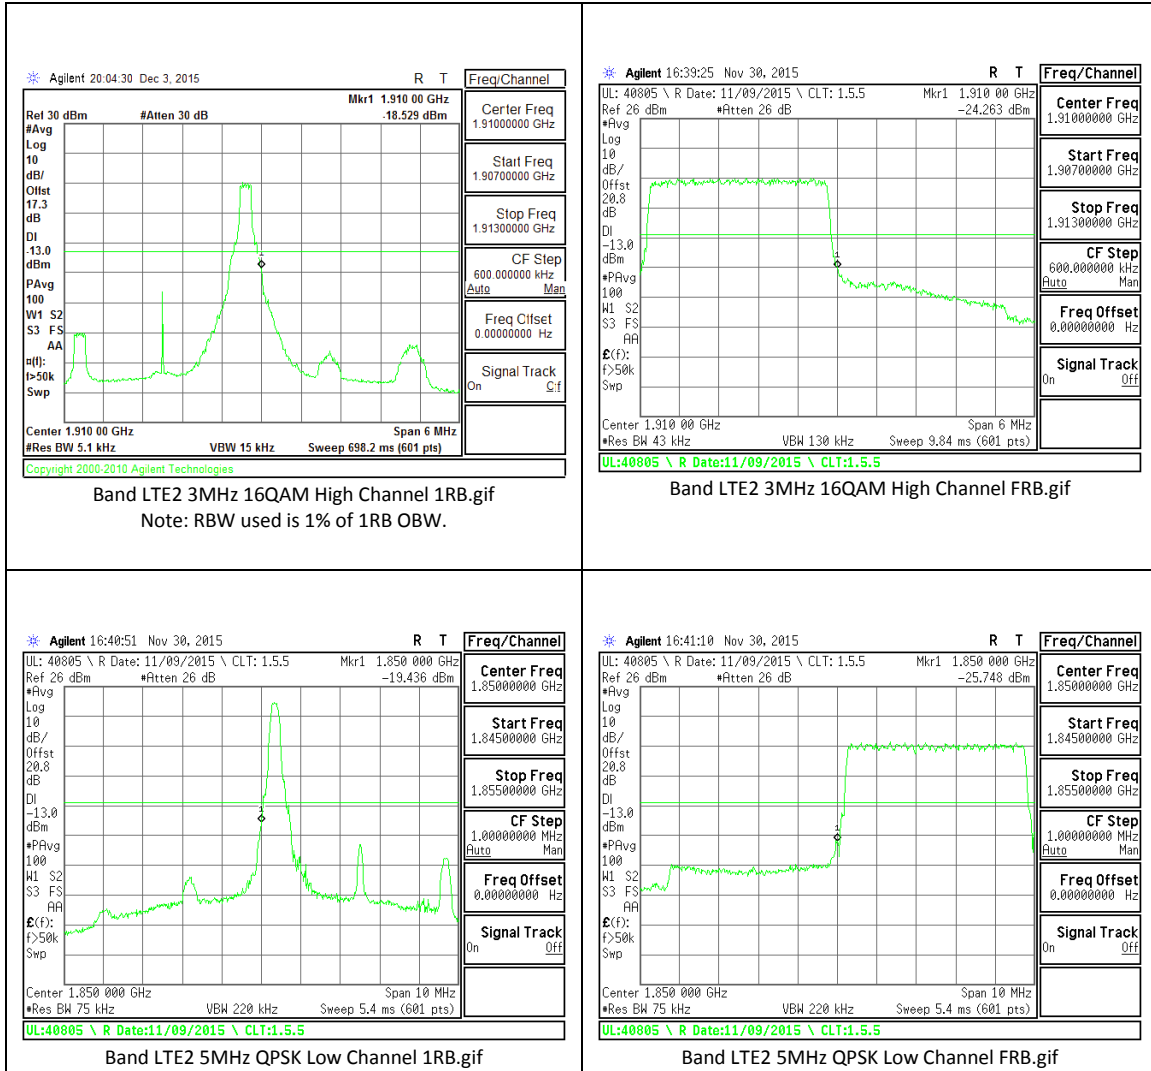


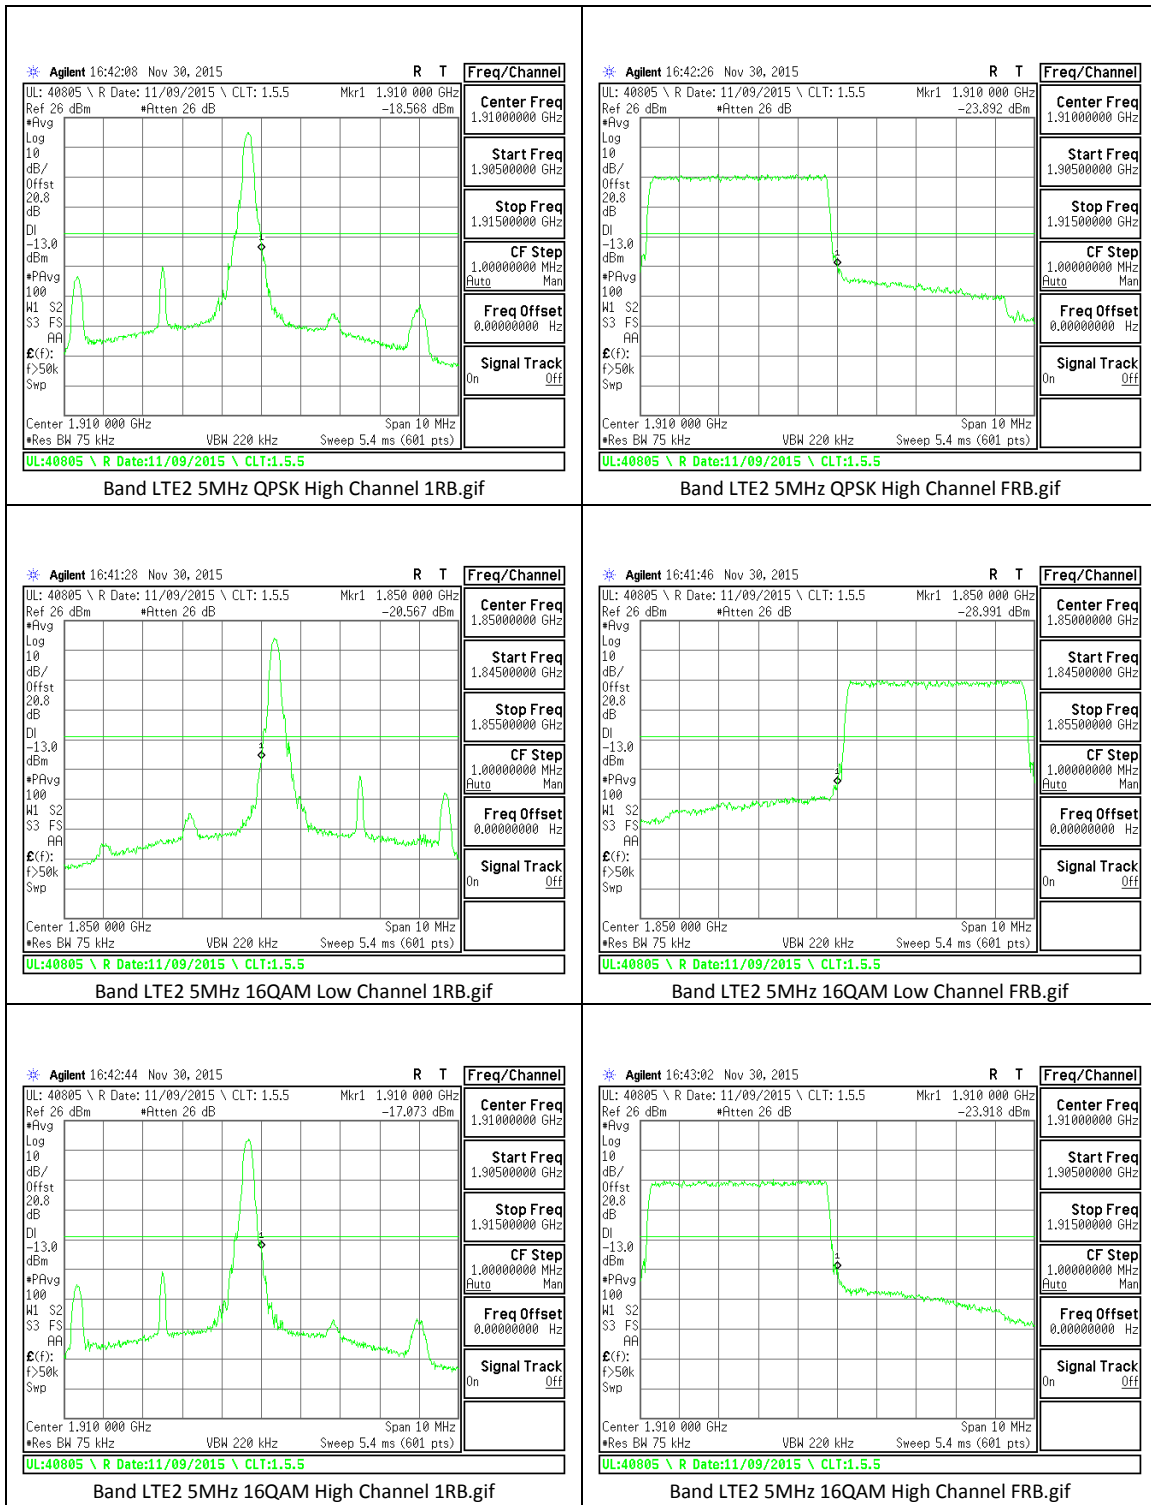

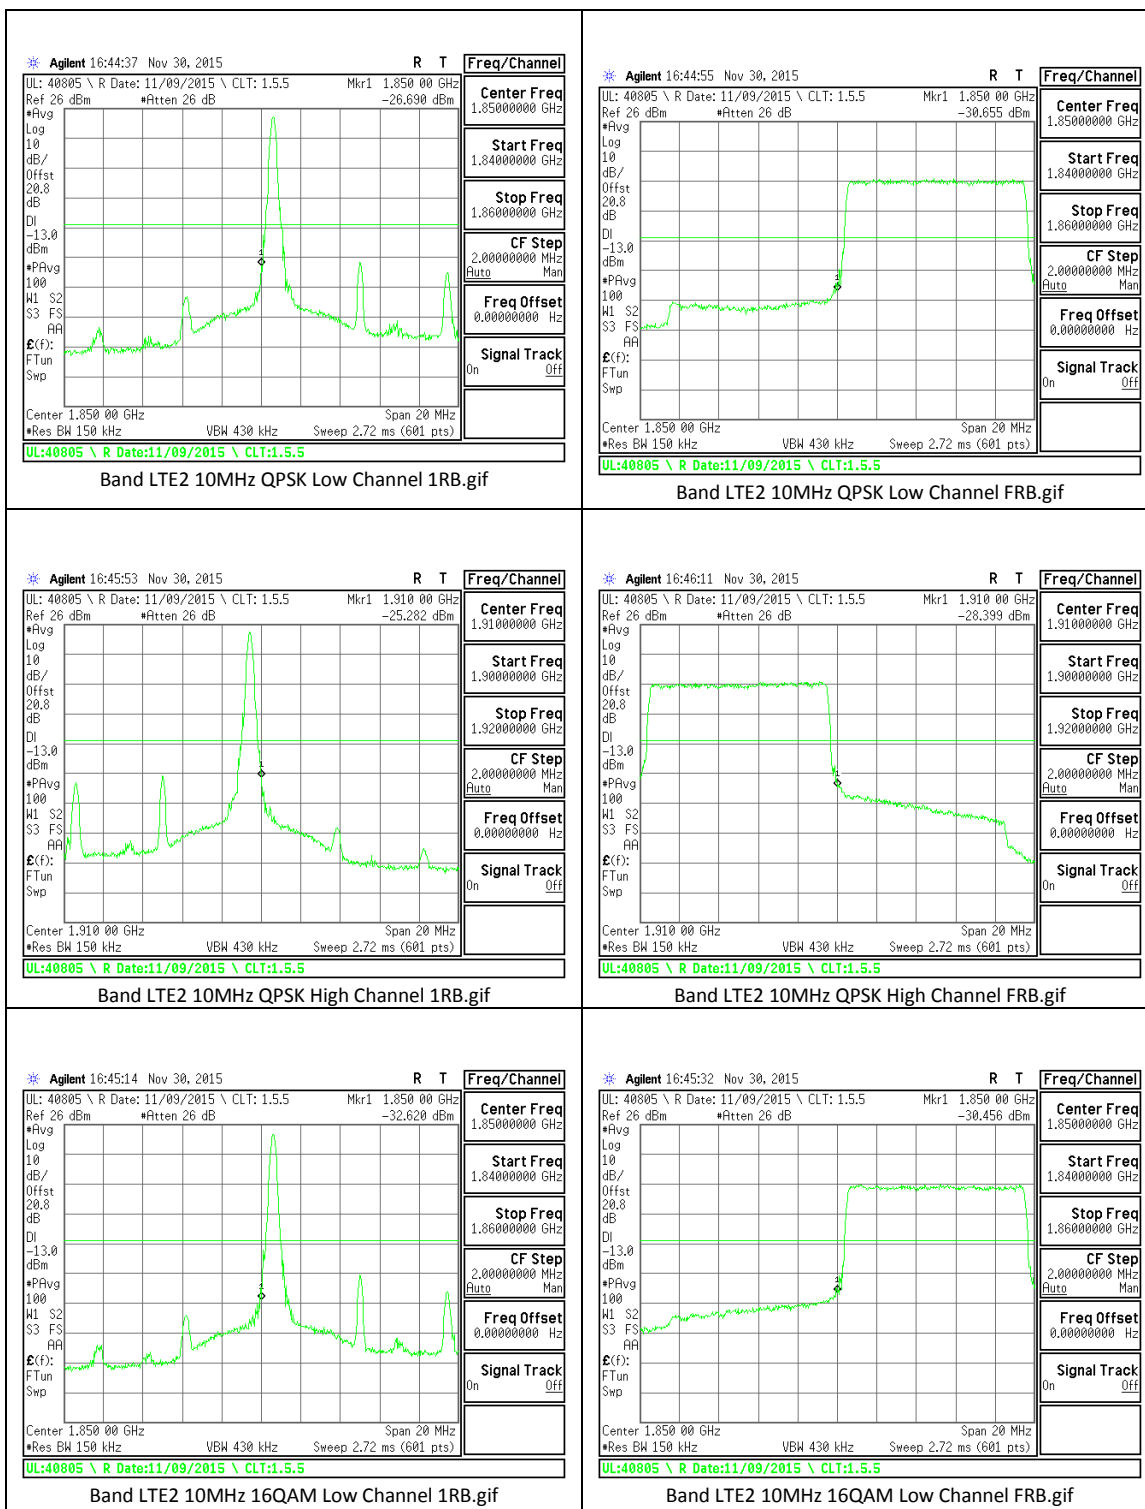


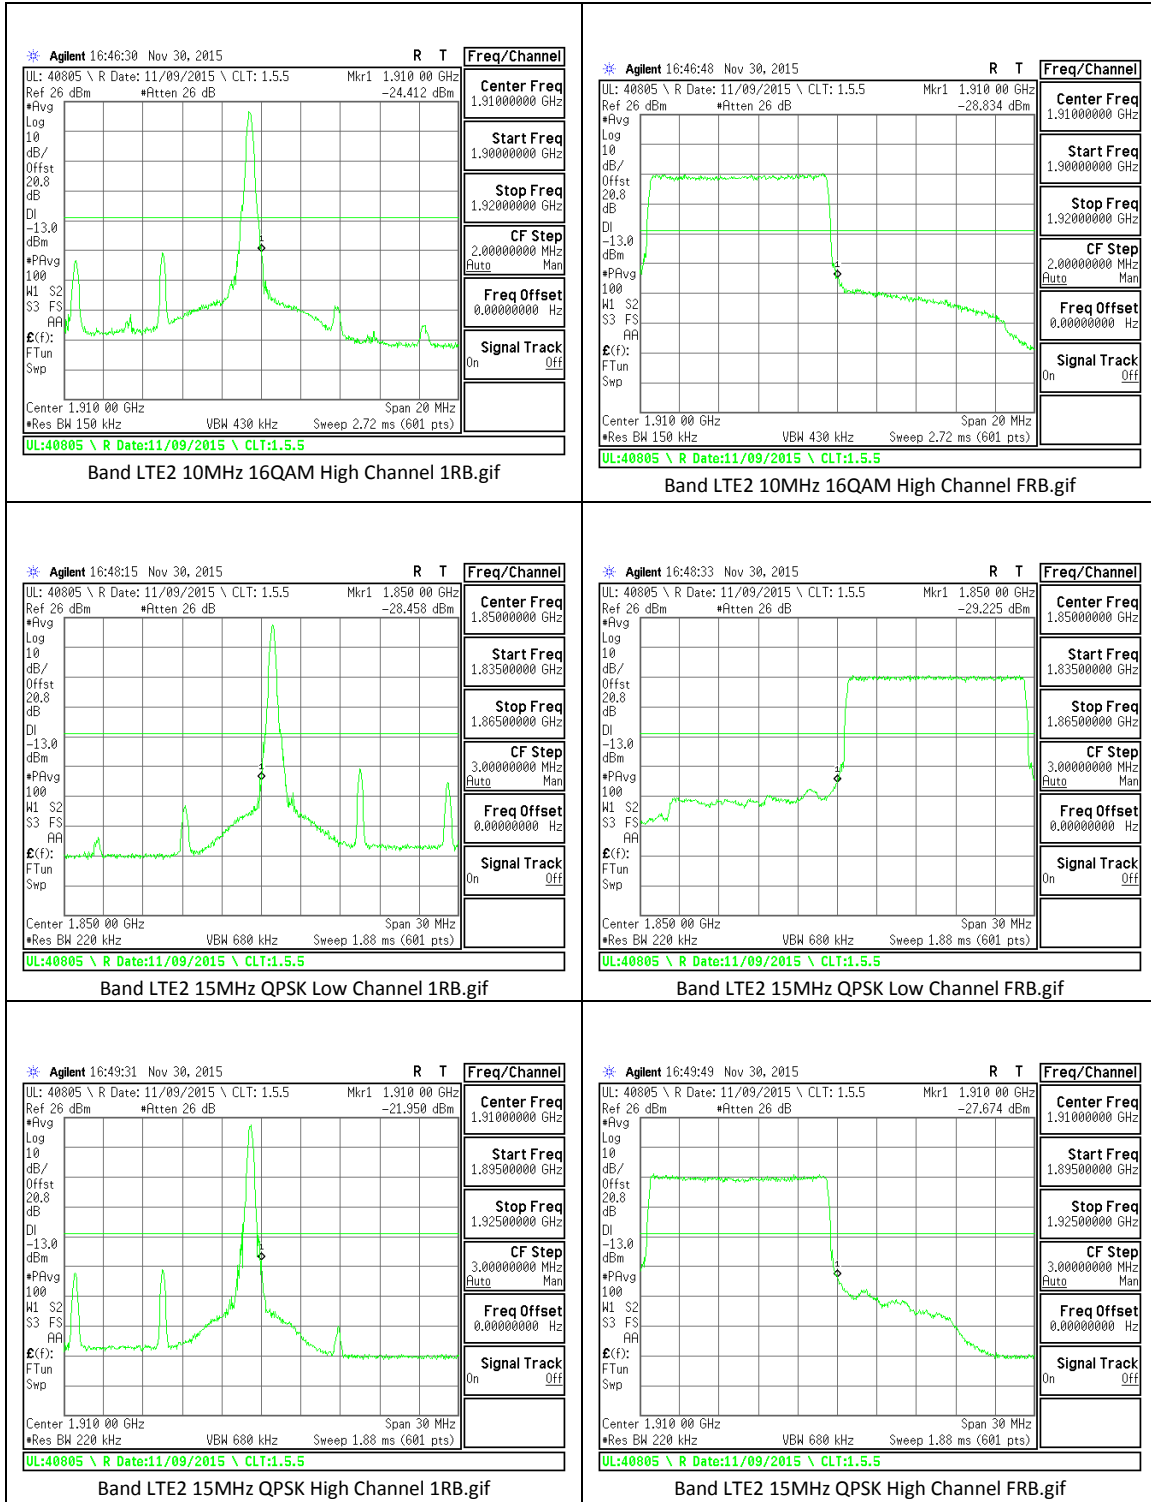


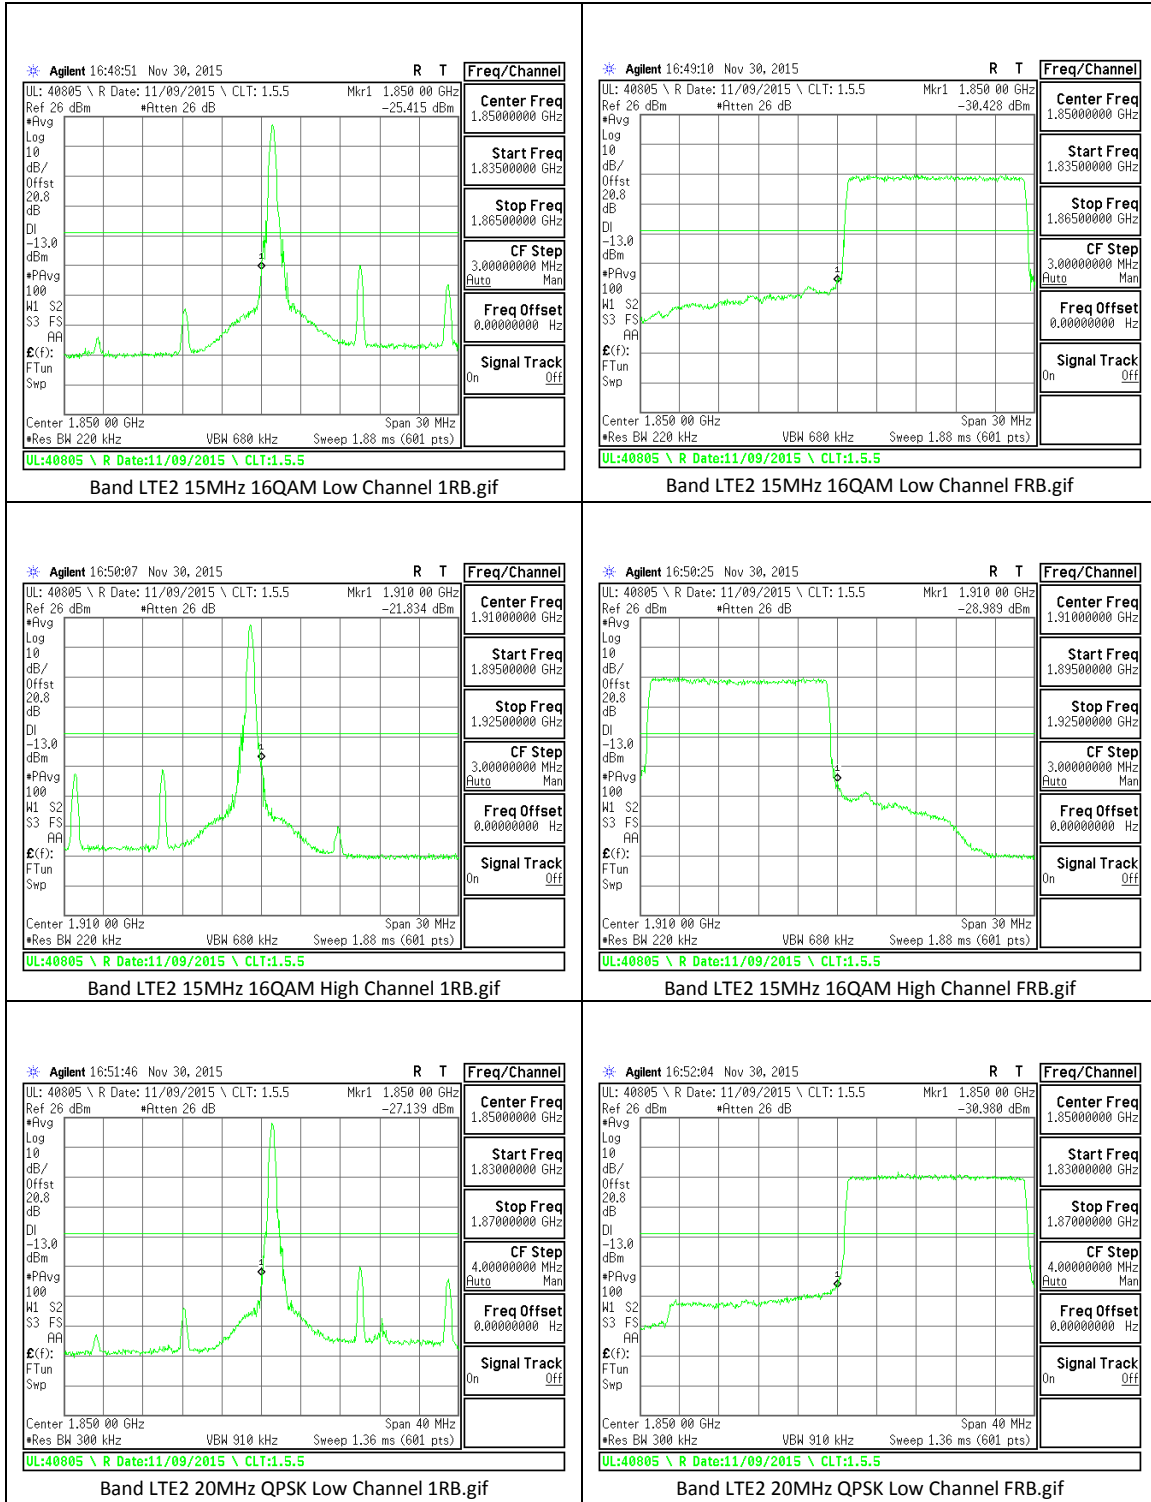


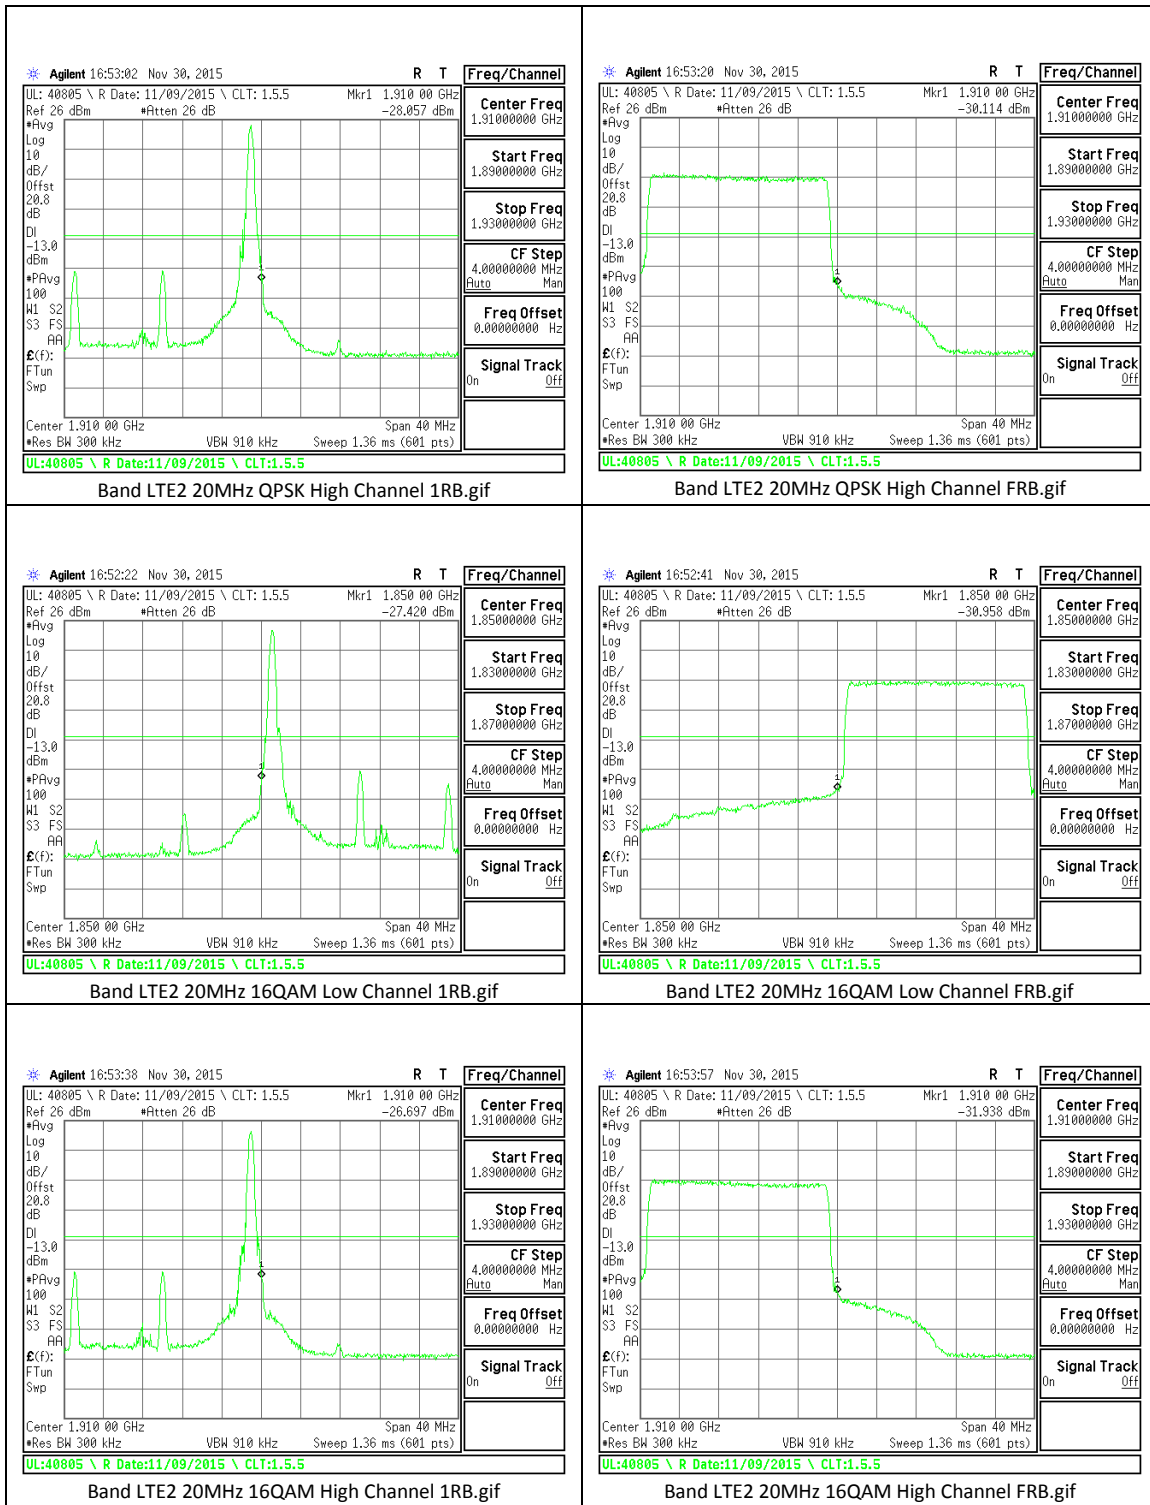



LTE Band 4

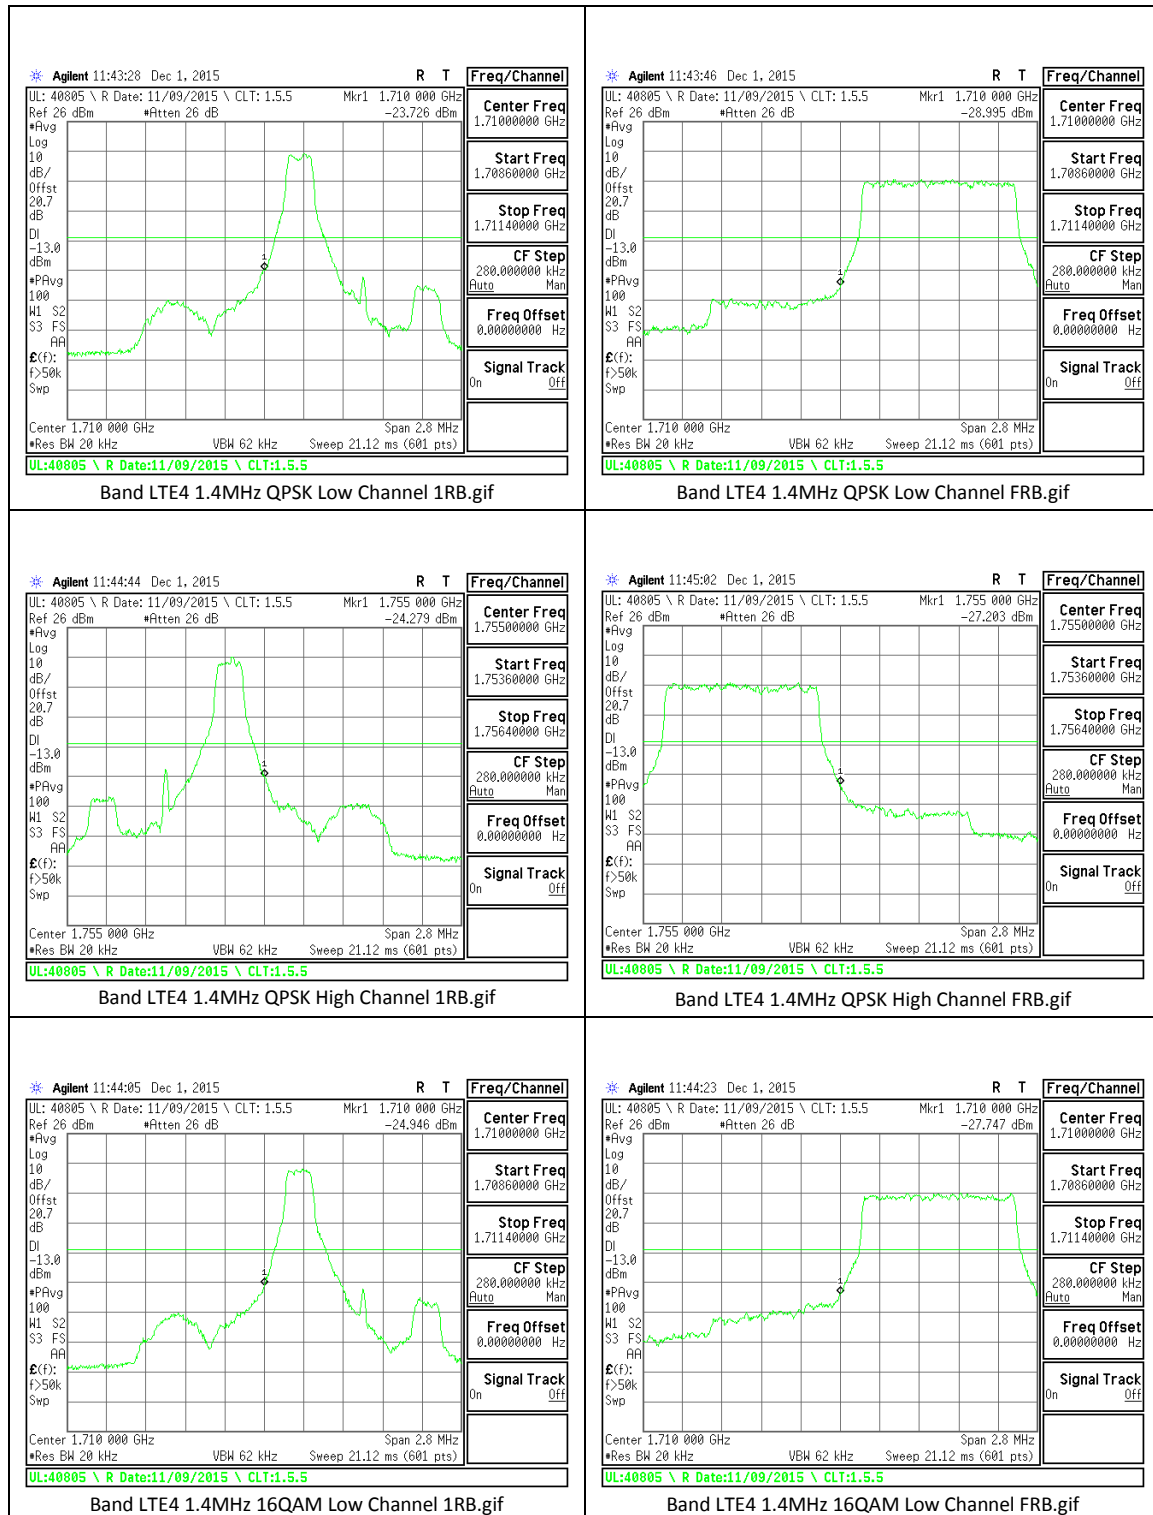


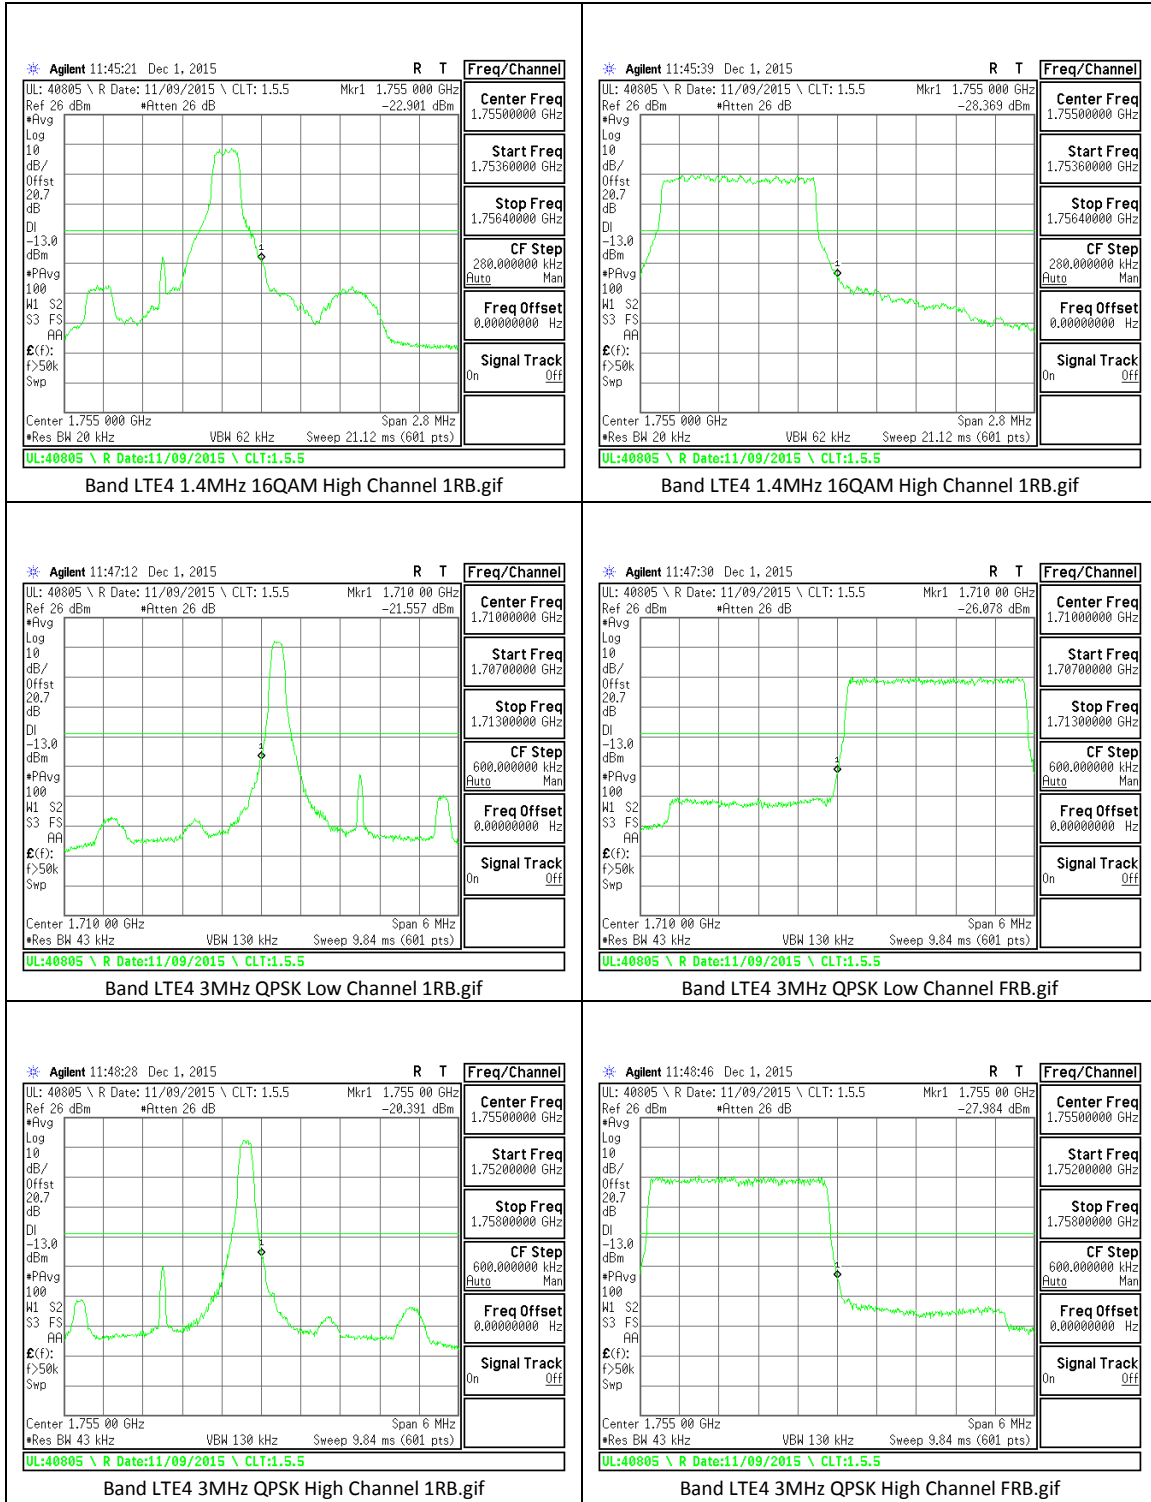


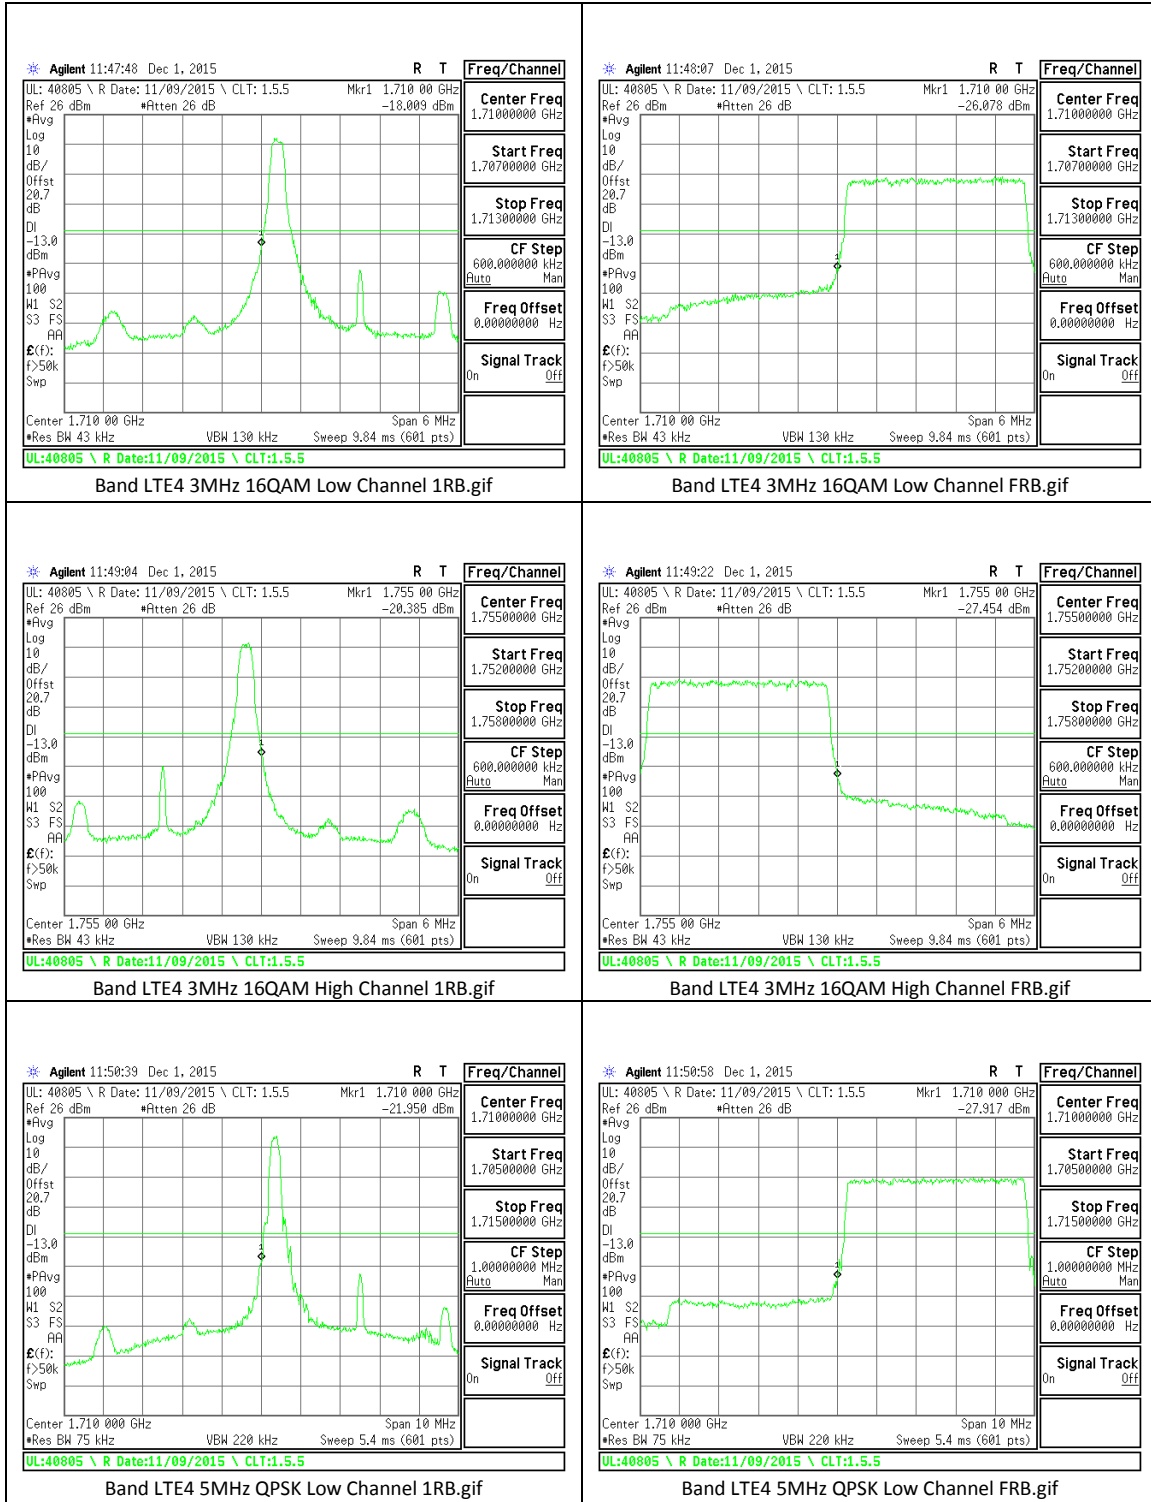


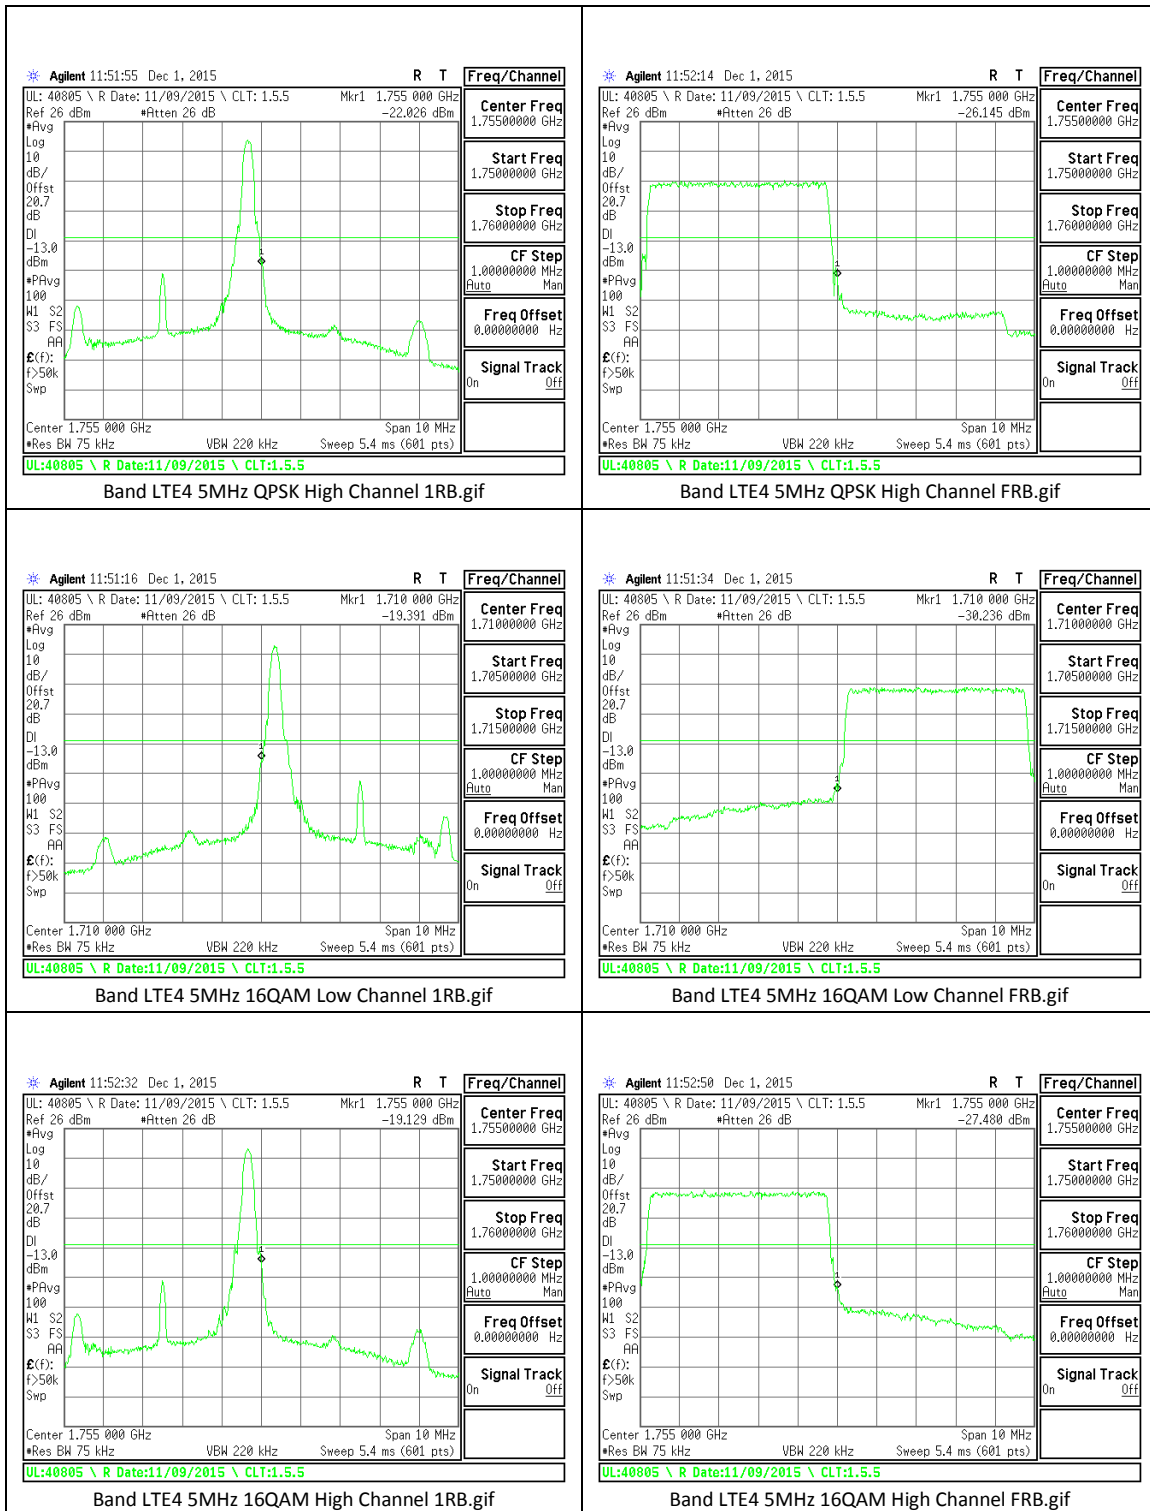

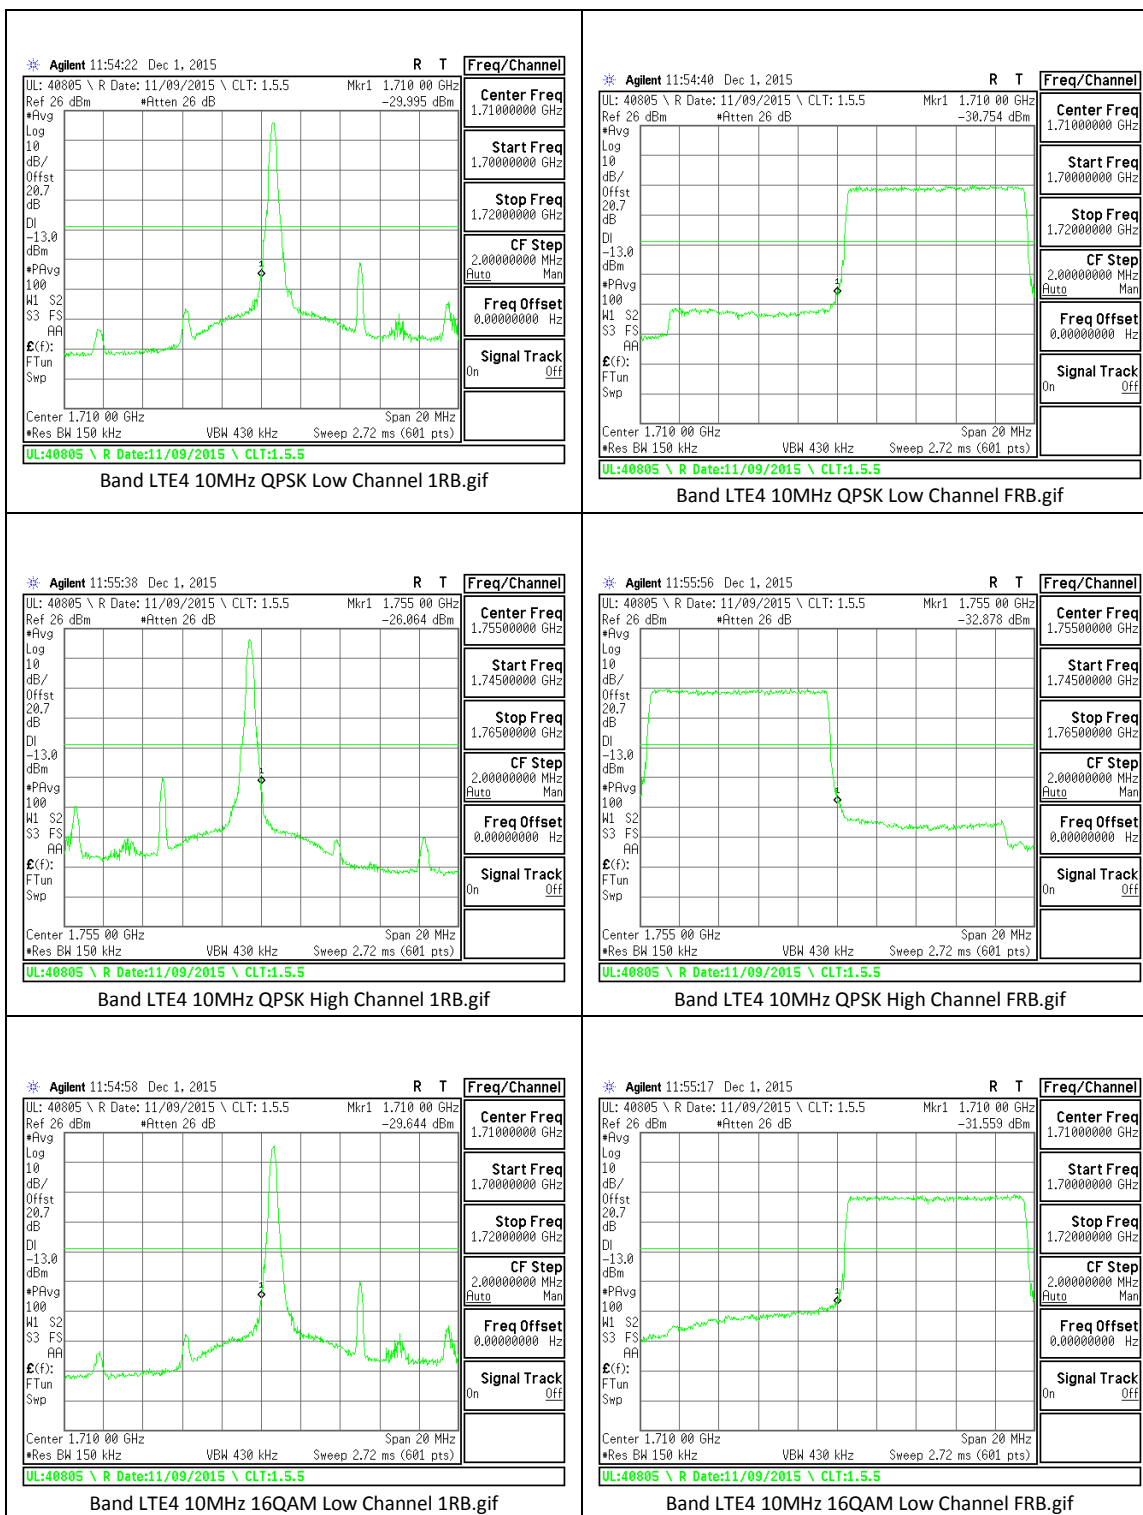


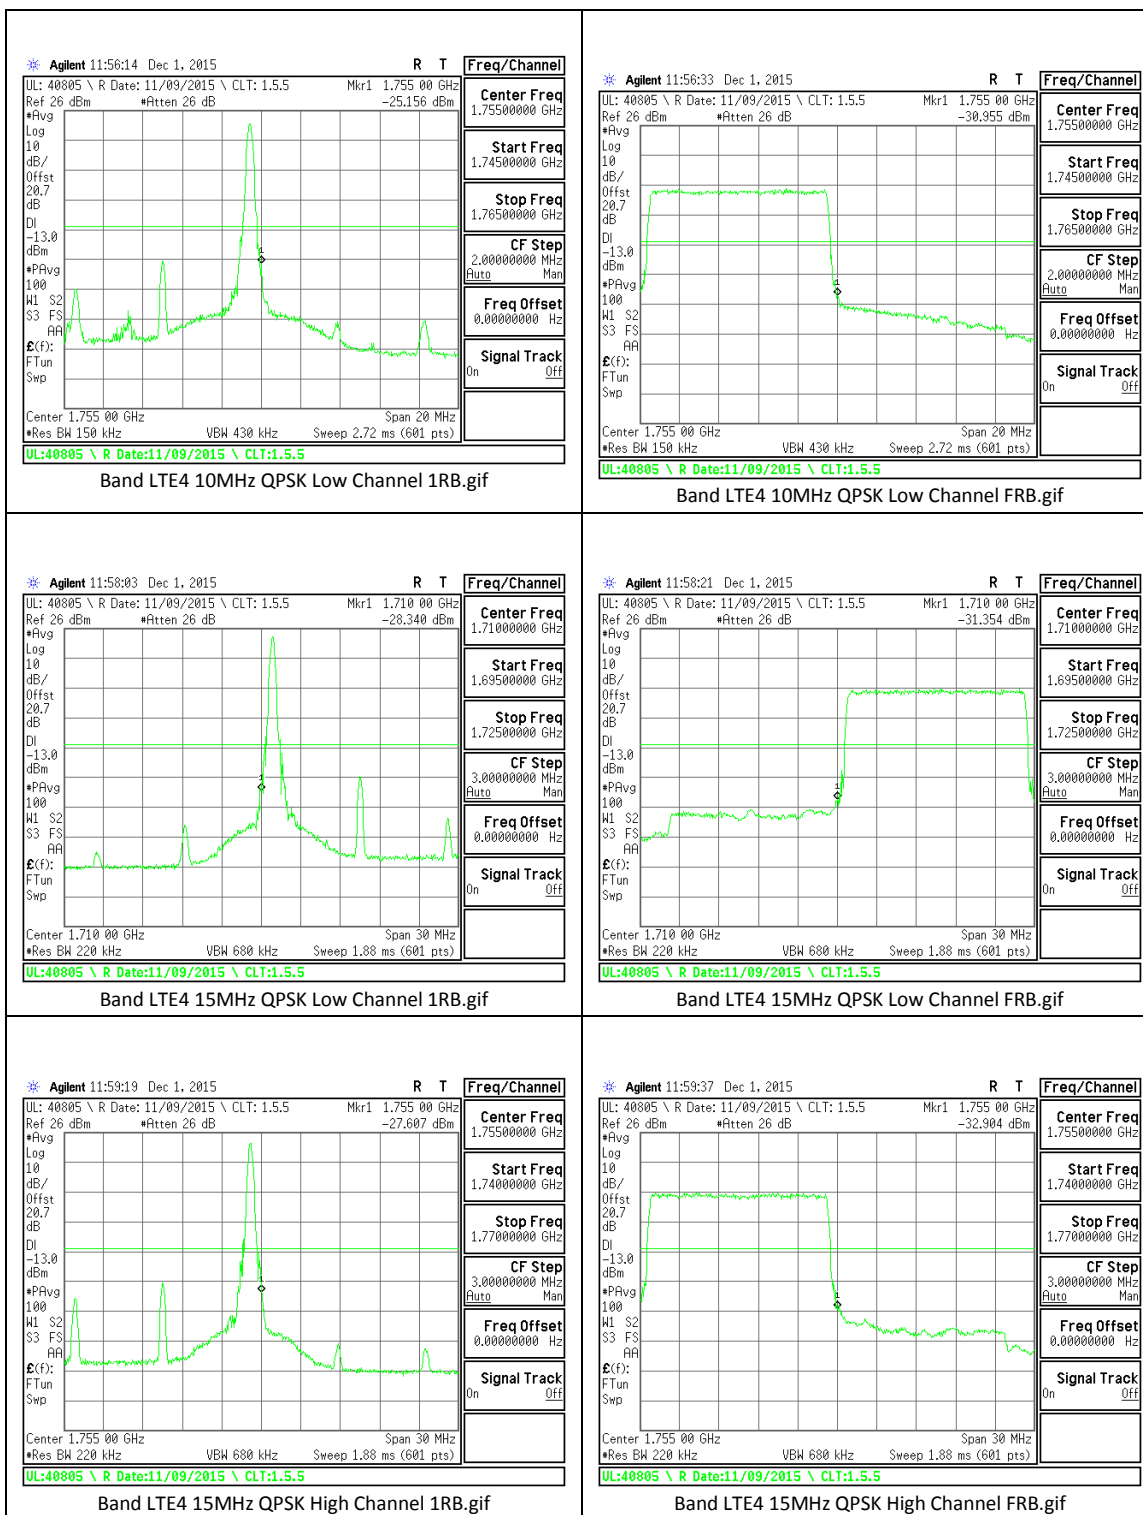


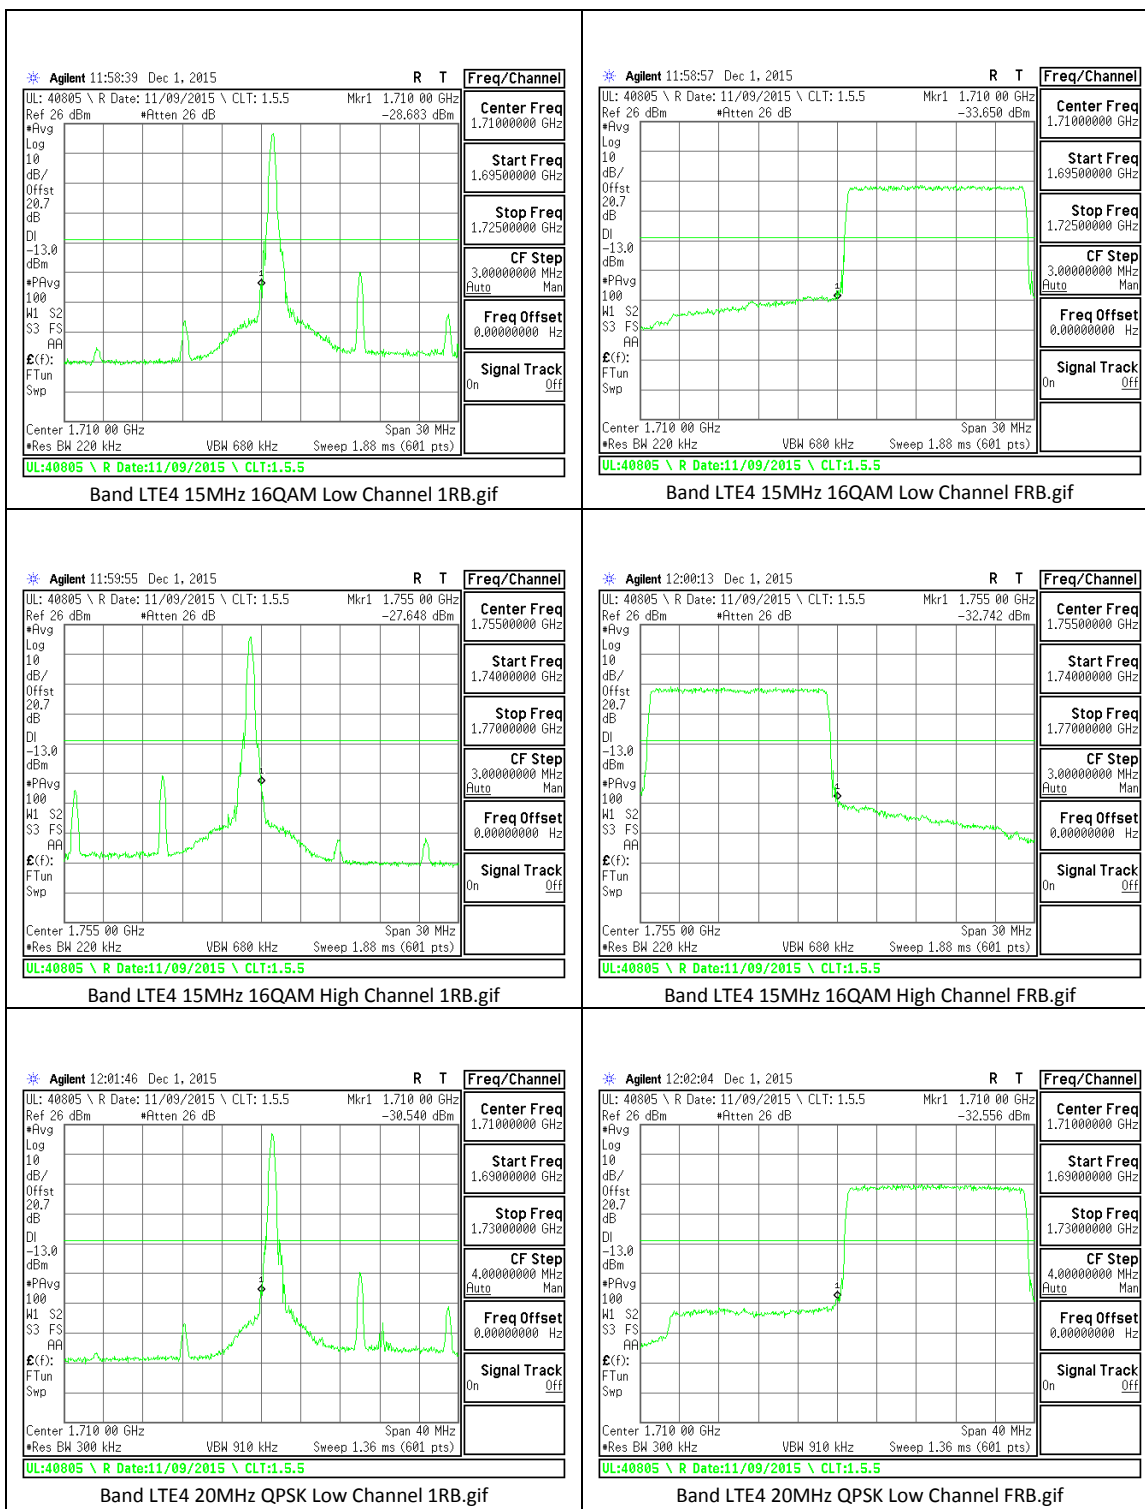


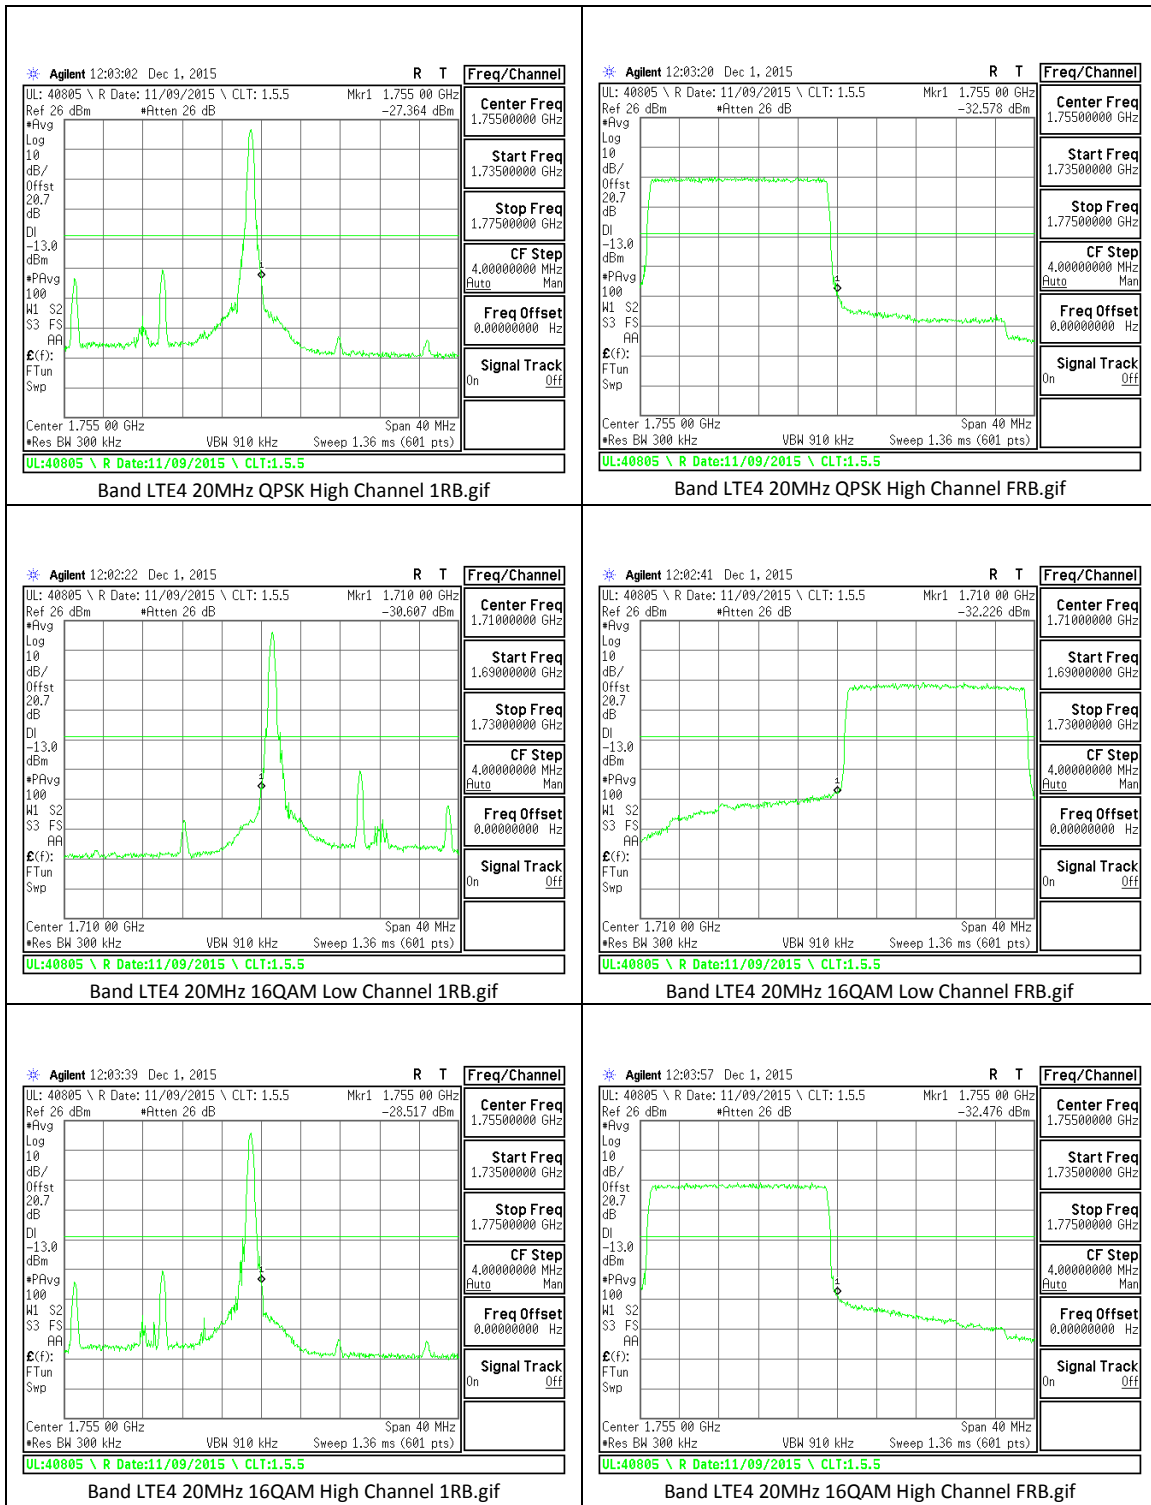



LTE Band 5

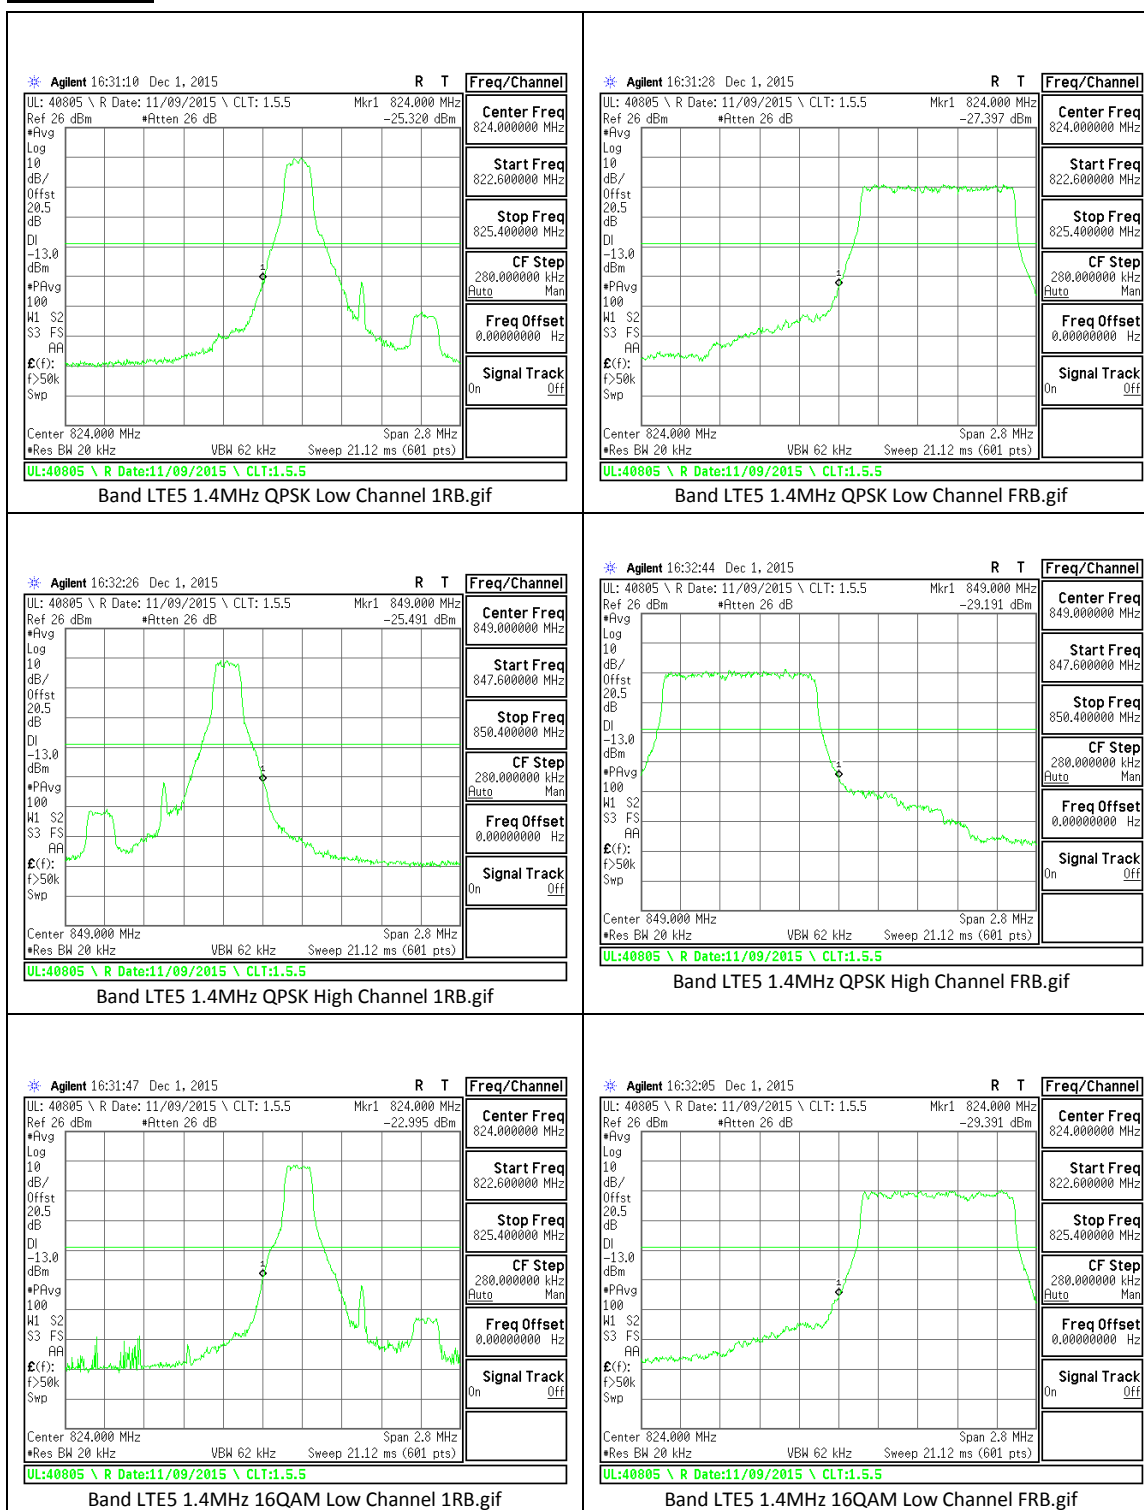


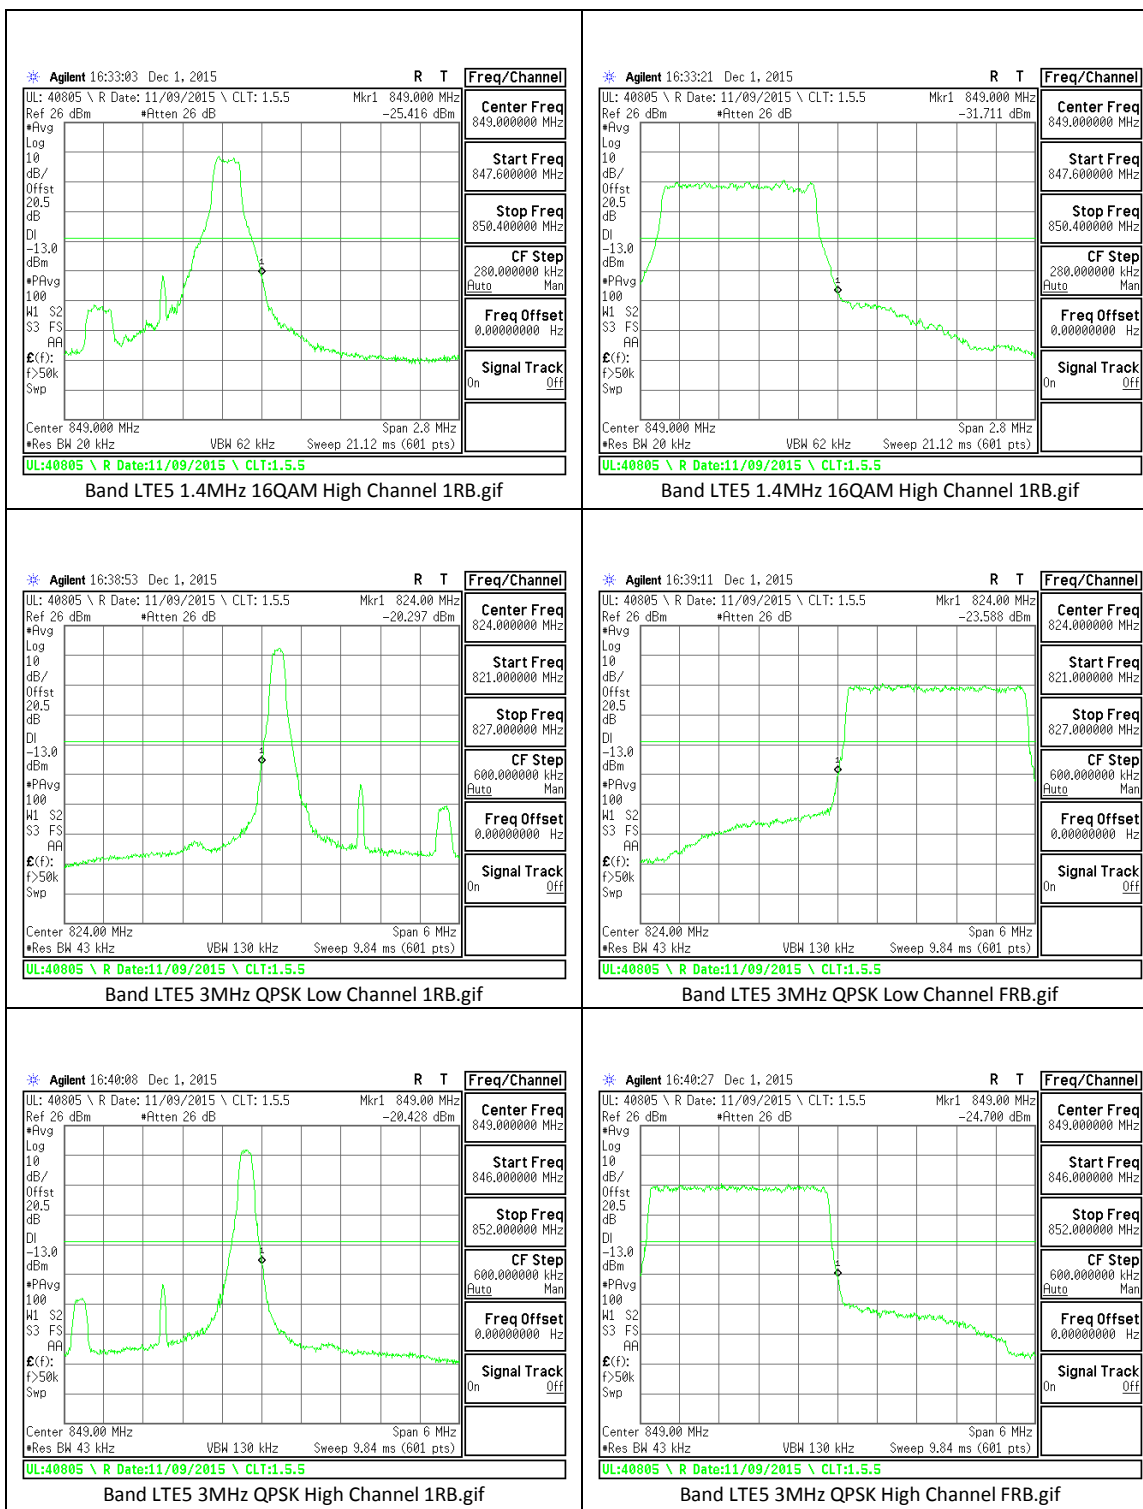

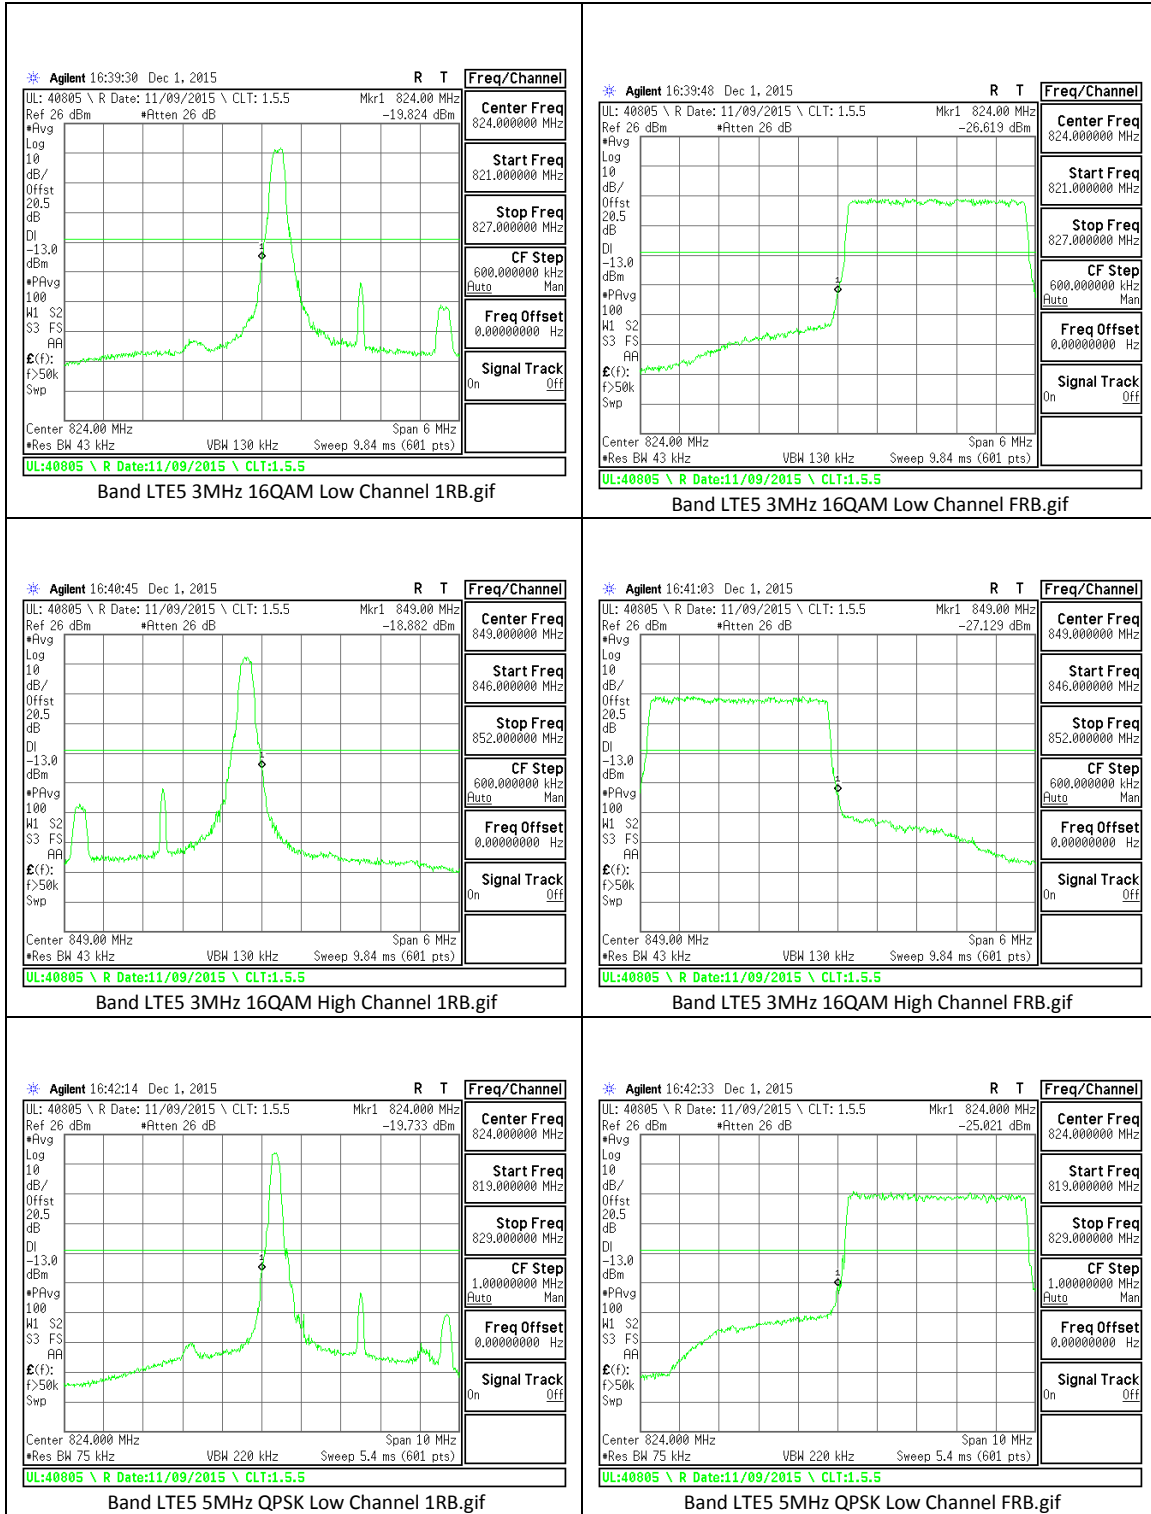


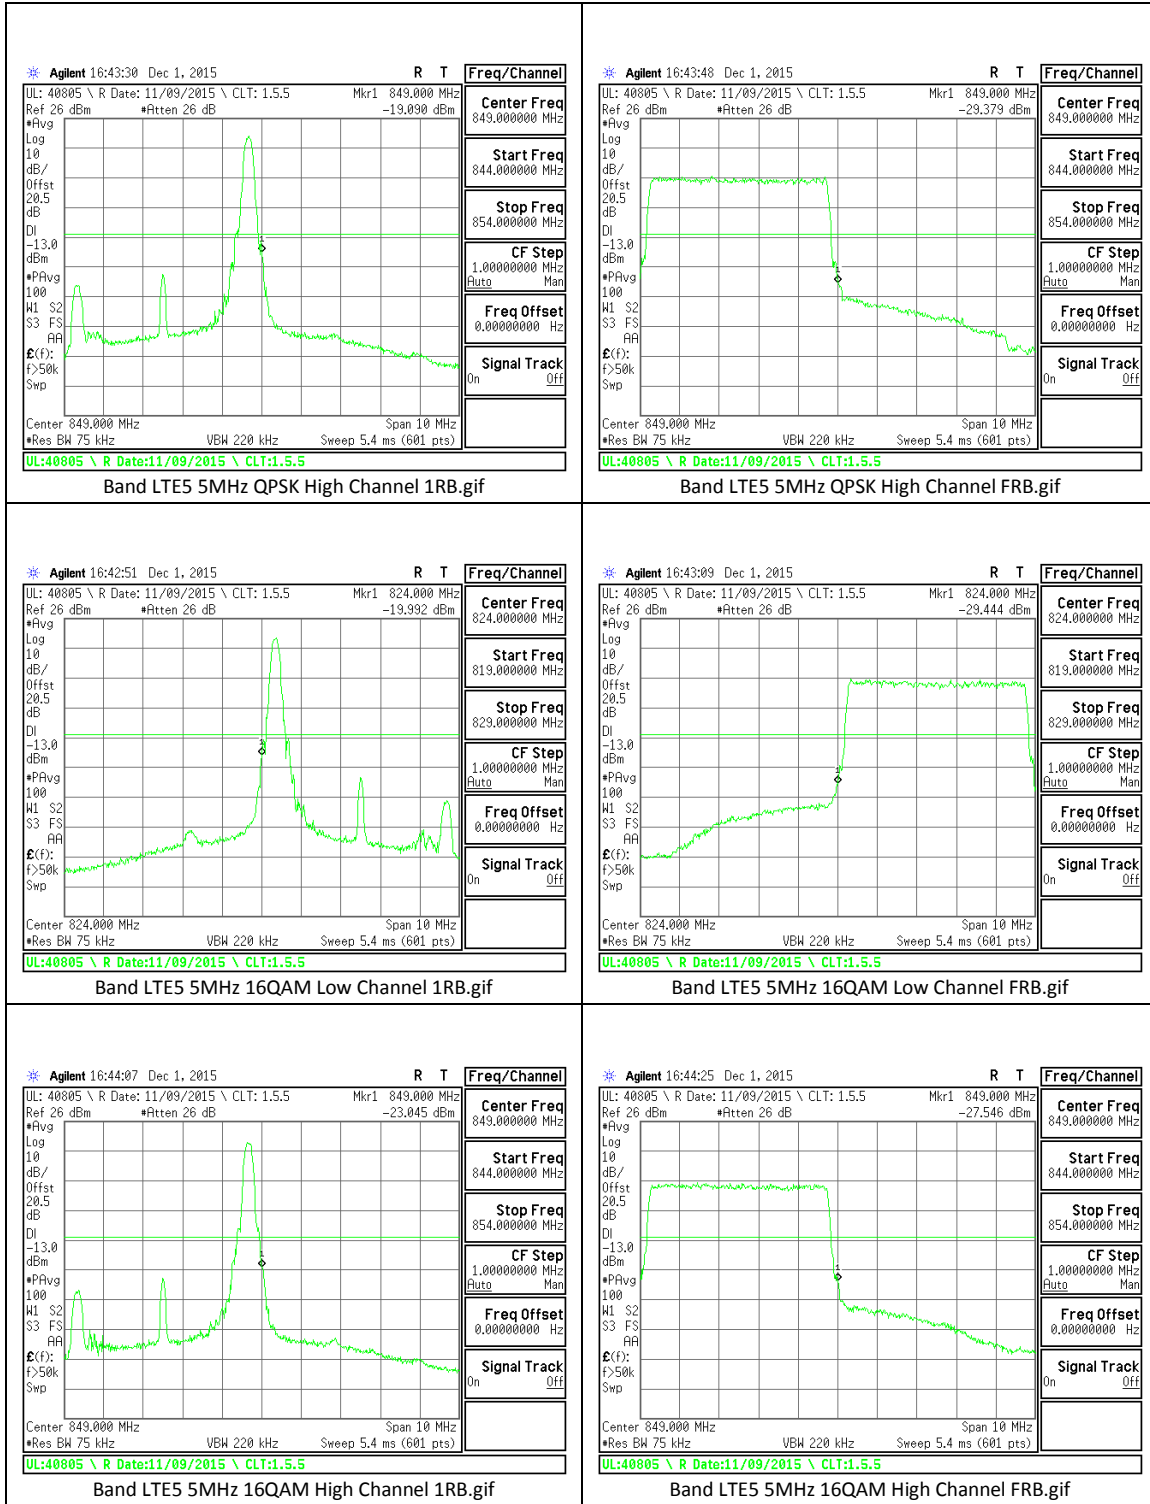


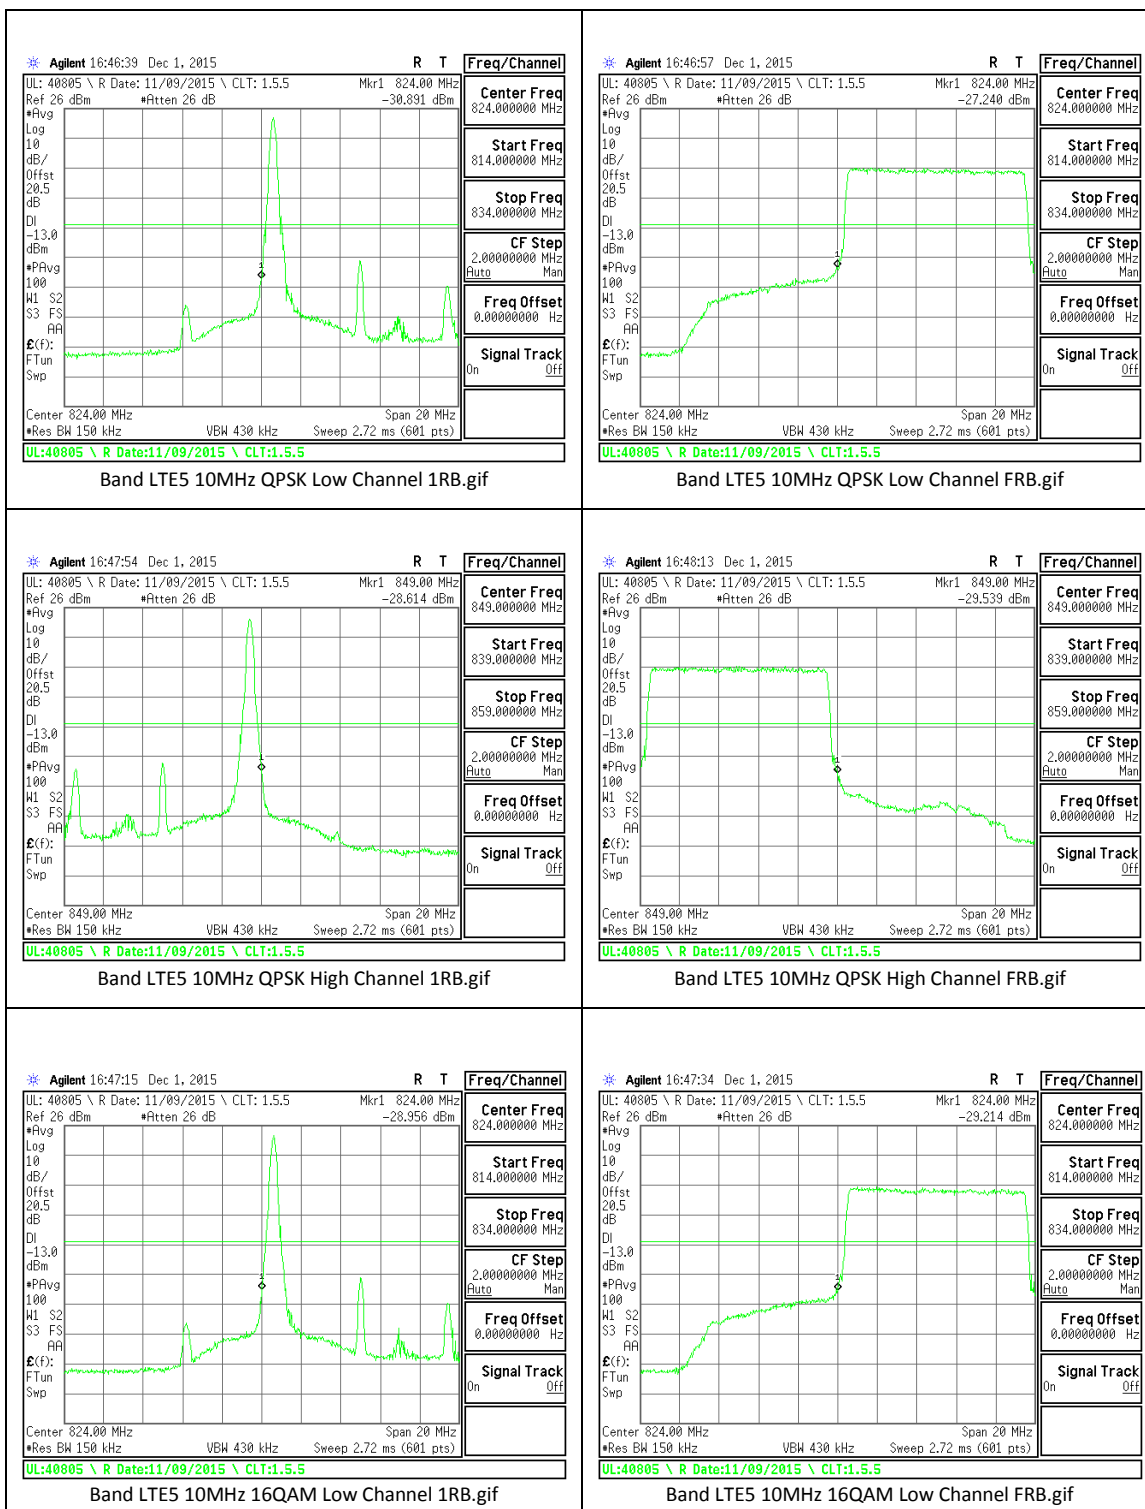


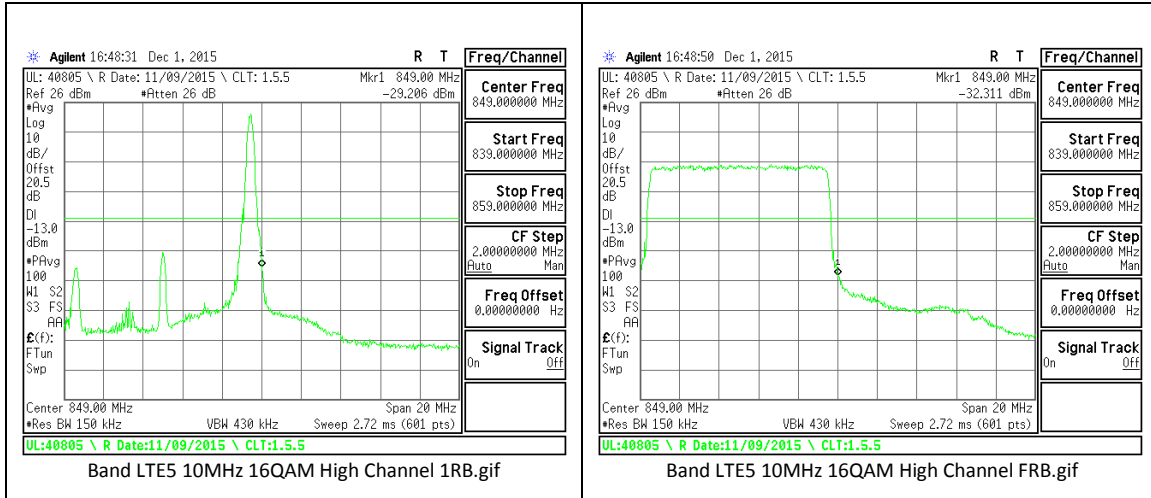

LTE Band 17

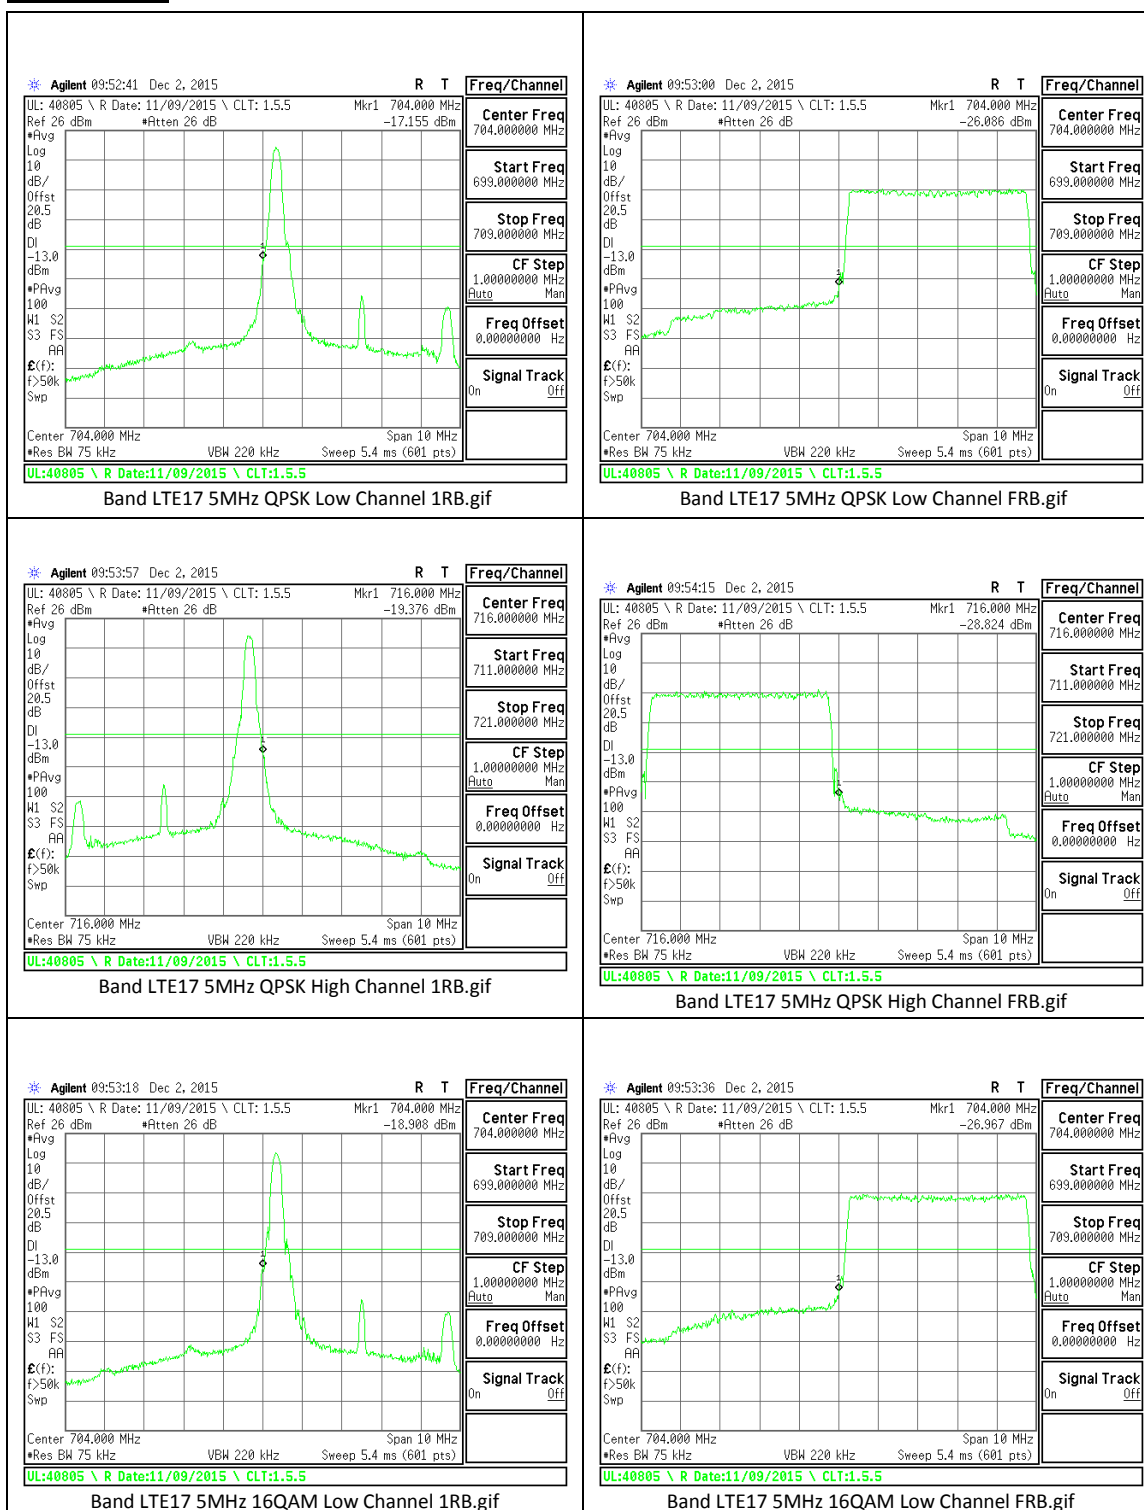

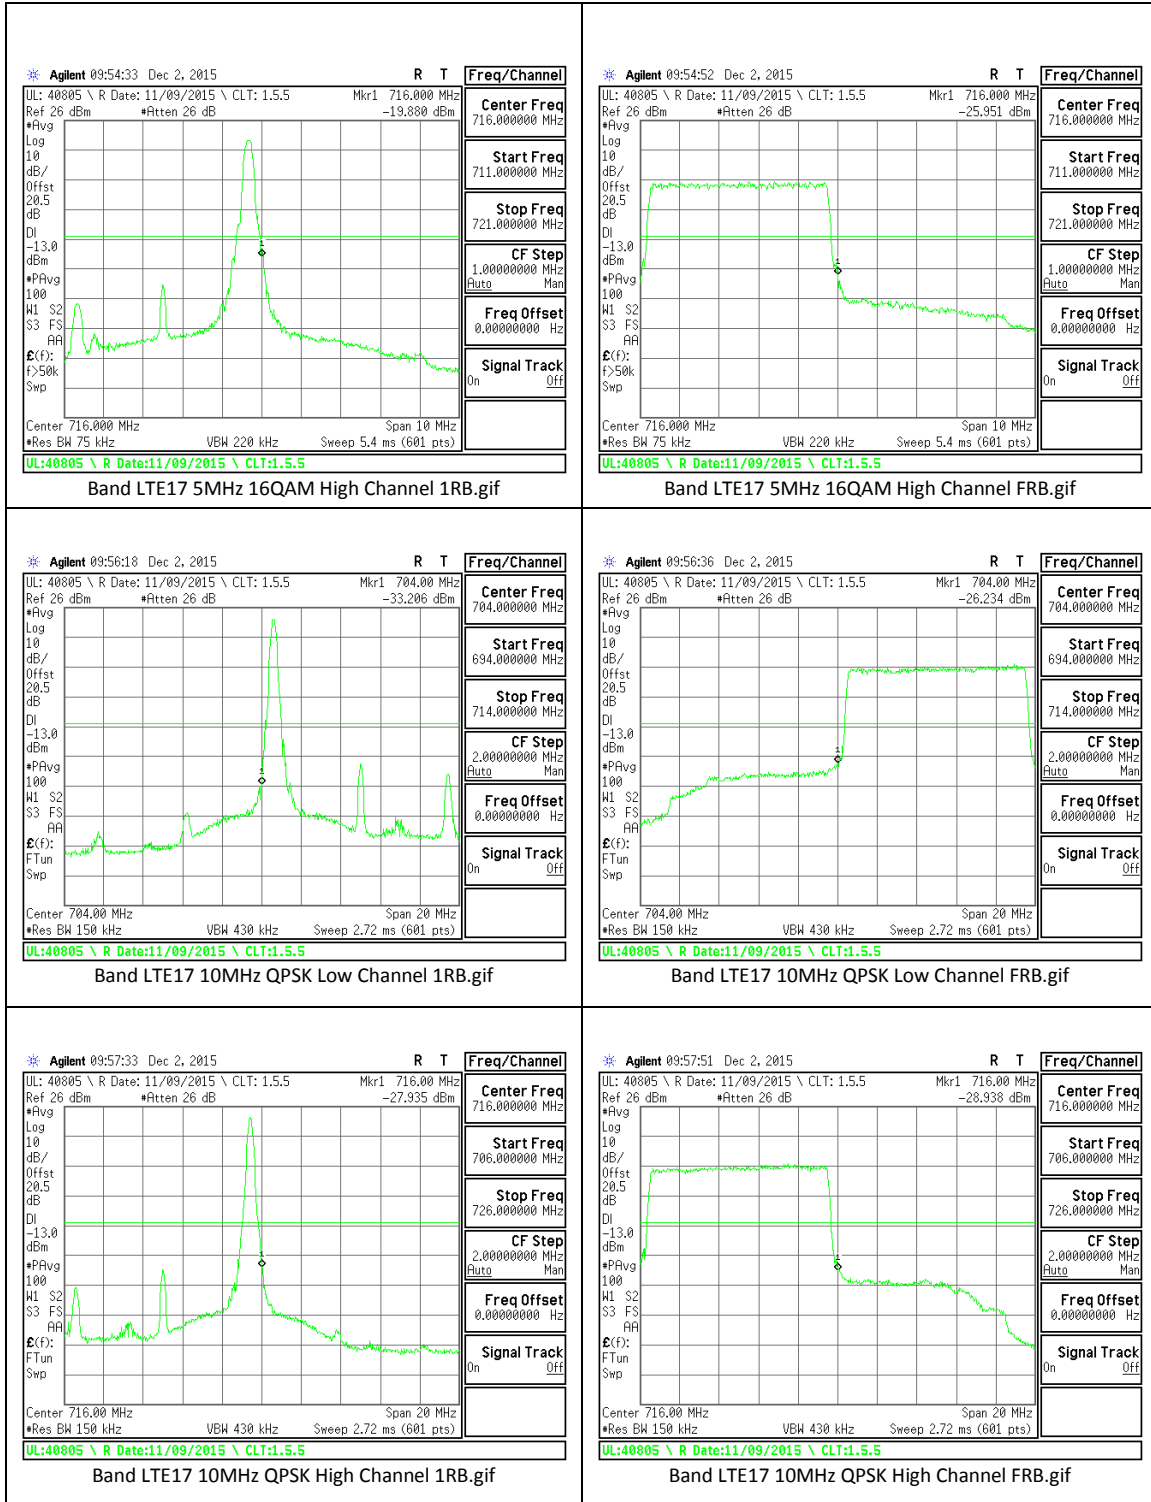

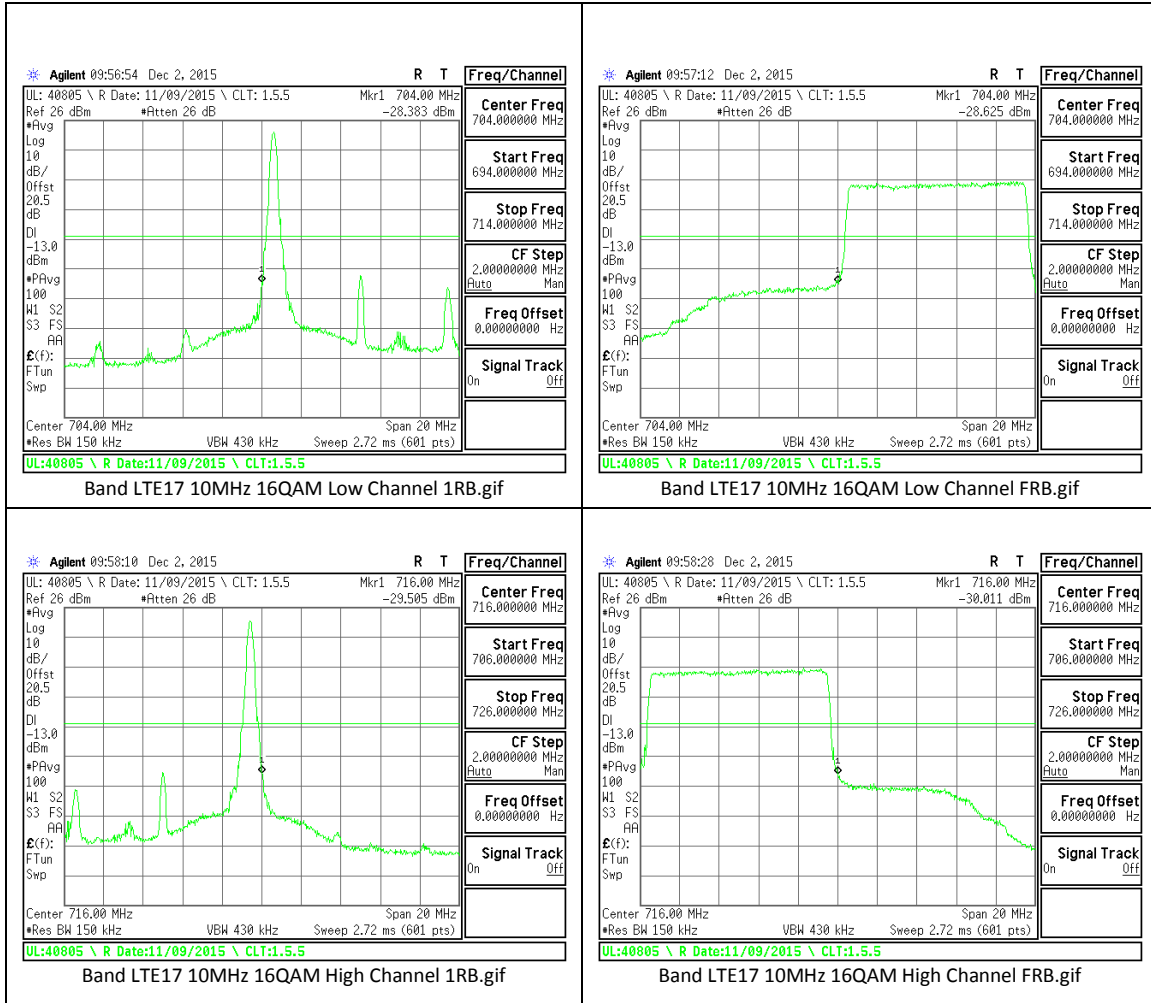

12. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.917, §24.238, §27.53

LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

Part 27: (m)(4) (4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

TEST PROCEDURE


Per KDB 971168 D01 Power Meas License Digital Systems v02r02

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

12.1.1. OUT OF BAND EMISSIONS RESULT AND PLOTS


GSM

Band	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
GSM 850	GPRS	824.2	-23.84	-13	-10.84
		836.6	-24.293	-13	-11.293
		848.8	-24.182	-13	-11.182
	EGPRS	824.2	-24.078	-13	-11.078
		836.6	-22.951	-13	-9.951
		848.8	-23.422	-13	-10.422
GSM 1900	GPRS	1850.2	-24.139	-13	-11.139
		1880	-23.371	-13	-10.371
		1909.8	-23.645	-13	-10.645
	EGPRS	1850.2	-23.037	-13	-10.037
		1880	-23.571	-13	-10.571
		1909.8	-23.523	-13	-10.523

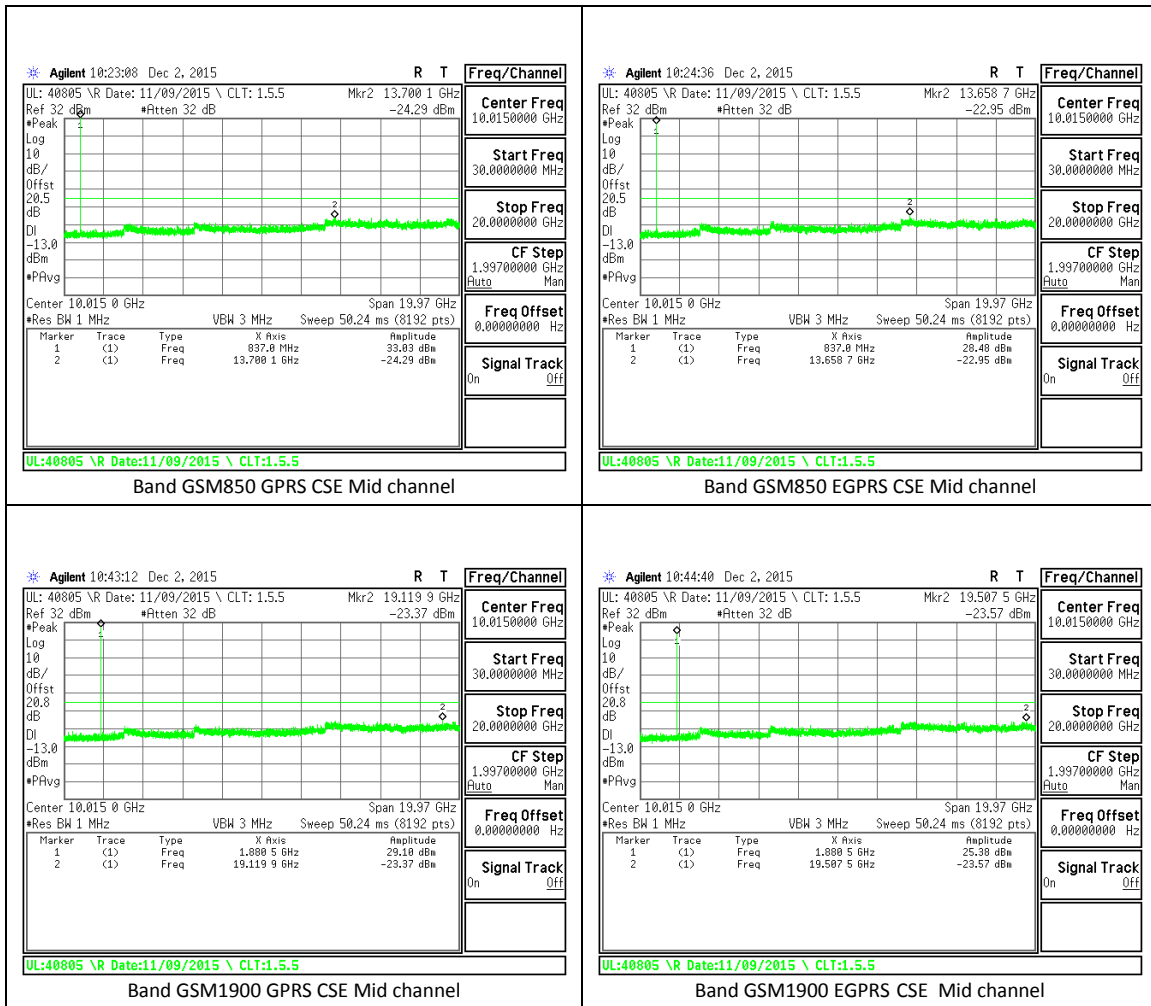


WCDMA


Band	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
Band 5	REL99	826.4	-23.104	-13	-10.104
		836.6	-23.741	-13	-10.741
		846.6	-23.643	-13	-10.643
	HSDPA	826.4	-23.718	-13	-10.718
		836.6	-23.325	-13	-10.325
		846.6	-22.669	-13	-9.669
Band 2	REL99	1852.4	-23.749	-13	-10.749
		1880	-23.349	-13	-10.349
		1907.6	-22.97	-13	-9.97
	HSDPA	1852.4	-22.713	-13	-9.713
		1880	-23.501	-13	-10.501
		1907.6	-23.383	-13	-10.383

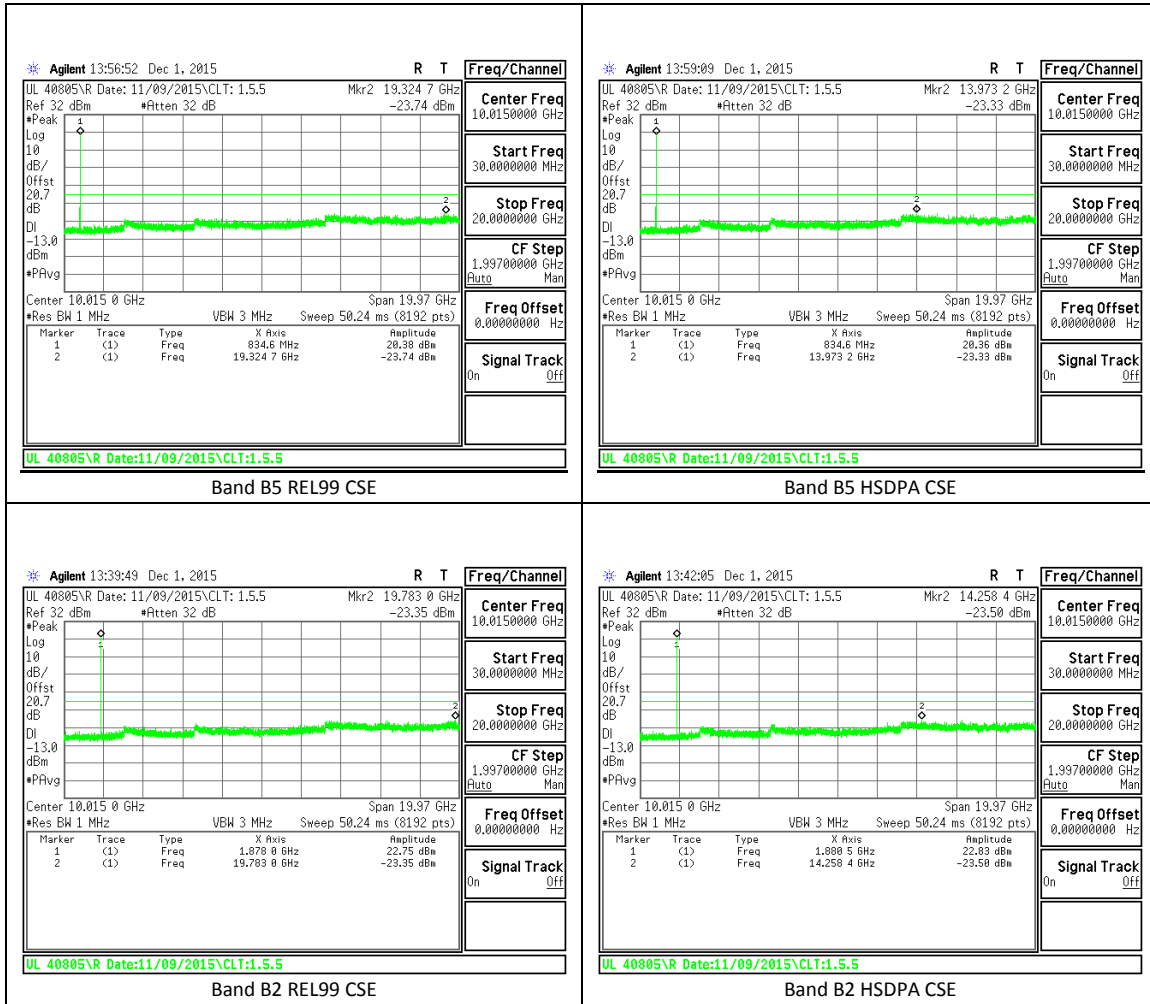


LTE Band 2

	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
1.4	QPSK	1850.7	-26.576	-13	-13.576
		1880	-26.168	-13	-13.168
		1909.3	-25.898	-13	-12.898
	16QAM	1850.7	-26.304	-13	-13.304
		1880	-27.203	-13	-14.203
		1909.3	-24.199	-13	-11.199
3	QPSK	1851.5	-26.856	-13	-13.856
		1880	-27.049	-13	-14.049
		1908.5	-25.24	-13	-12.24
	16QAM	1851.5	-26.636	-13	-13.636
		1880	-26.913	-13	-13.913
		1908.5	-25.565	-13	-12.565
5	QPSK	1852.5	-26.268	-13	-13.268
		1880	-26.314	-13	-13.314
		1907.5	-26.277	-13	-13.277
	16QAM	1852.5	-26.641	-13	-13.641
		1880	-27.646	-13	-14.646
		1907.5	-27.262	-13	-14.262
10	QPSK	1855	-26.21	-13	-13.21
		1880	-26.78	-13	-13.78
		1905	-26.753	-13	-13.753
	16QAM	1855	-27.509	-13	-14.509
		1880	-27.565	-13	-14.565
		1905	-26.798	-13	-13.798
15	QPSK	1857.5	-27.349	-13	-14.349
		1880	-26	-13	-13
		1902.5	-27.04	-13	-14.04
	16QAM	1857.5	-27.02	-13	-14.02
		1880	-27.26	-13	-14.26
		1902.5	-27.47	-13	-14.47
20	QPSK	1860	-25.84	-13	-12.84
		1880	-26.28	-13	-13.28
		1900	-26.9	-13	-13.9
	16QAM	1860	-26.74	-13	-13.74
		1880	-27.04	-13	-14.04
		1900	-27.19	-13	-14.19

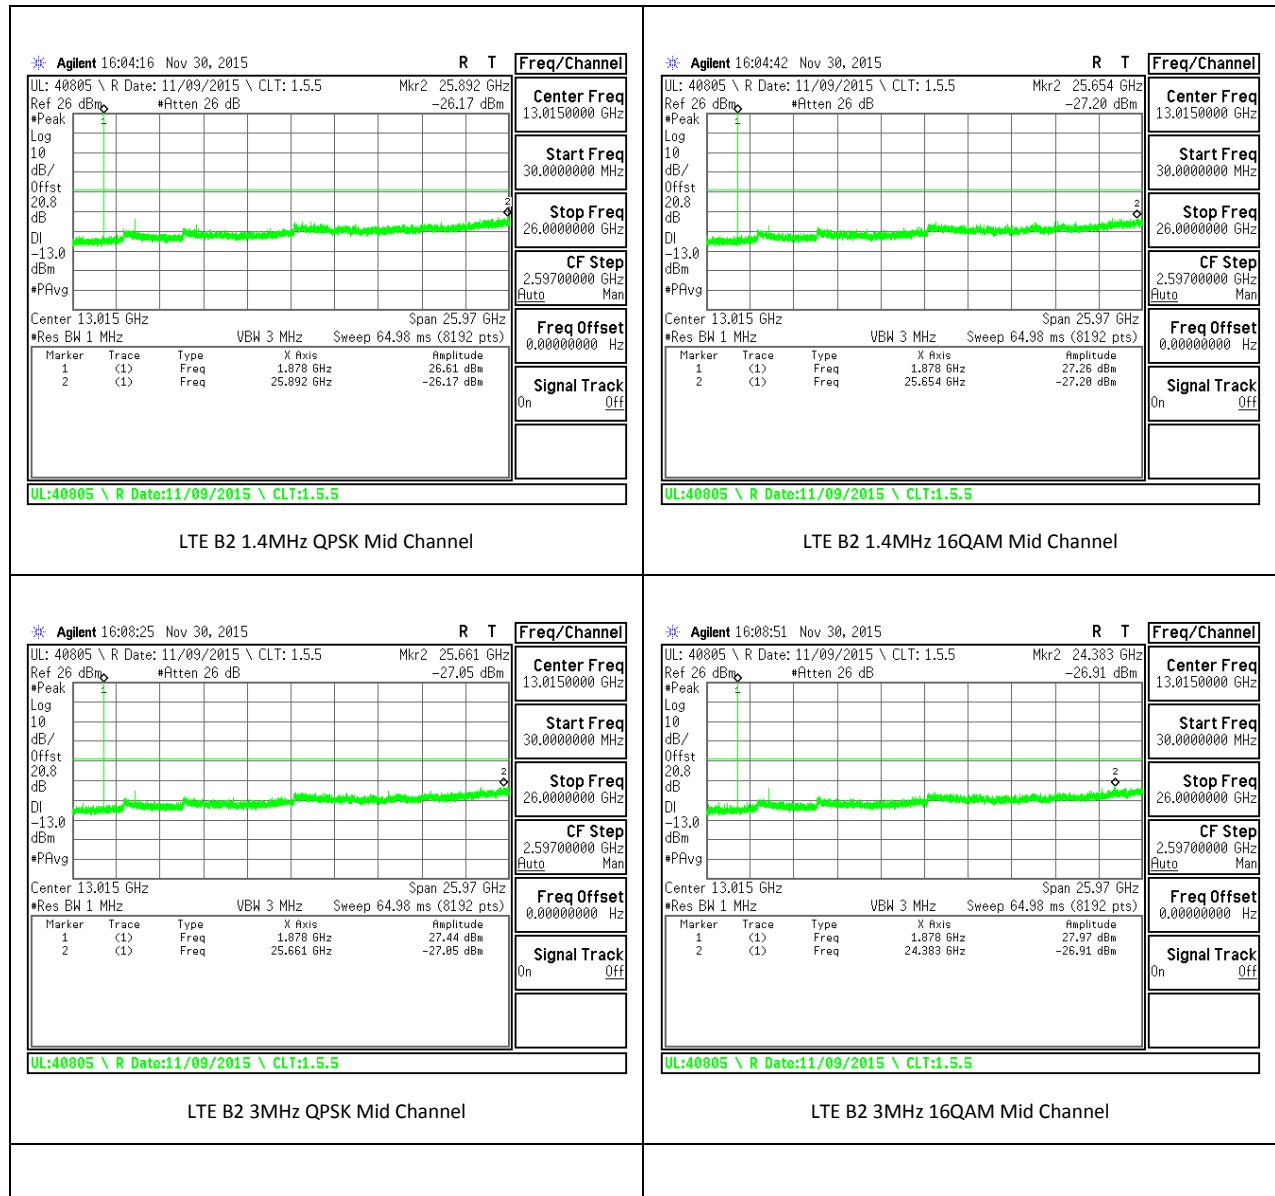

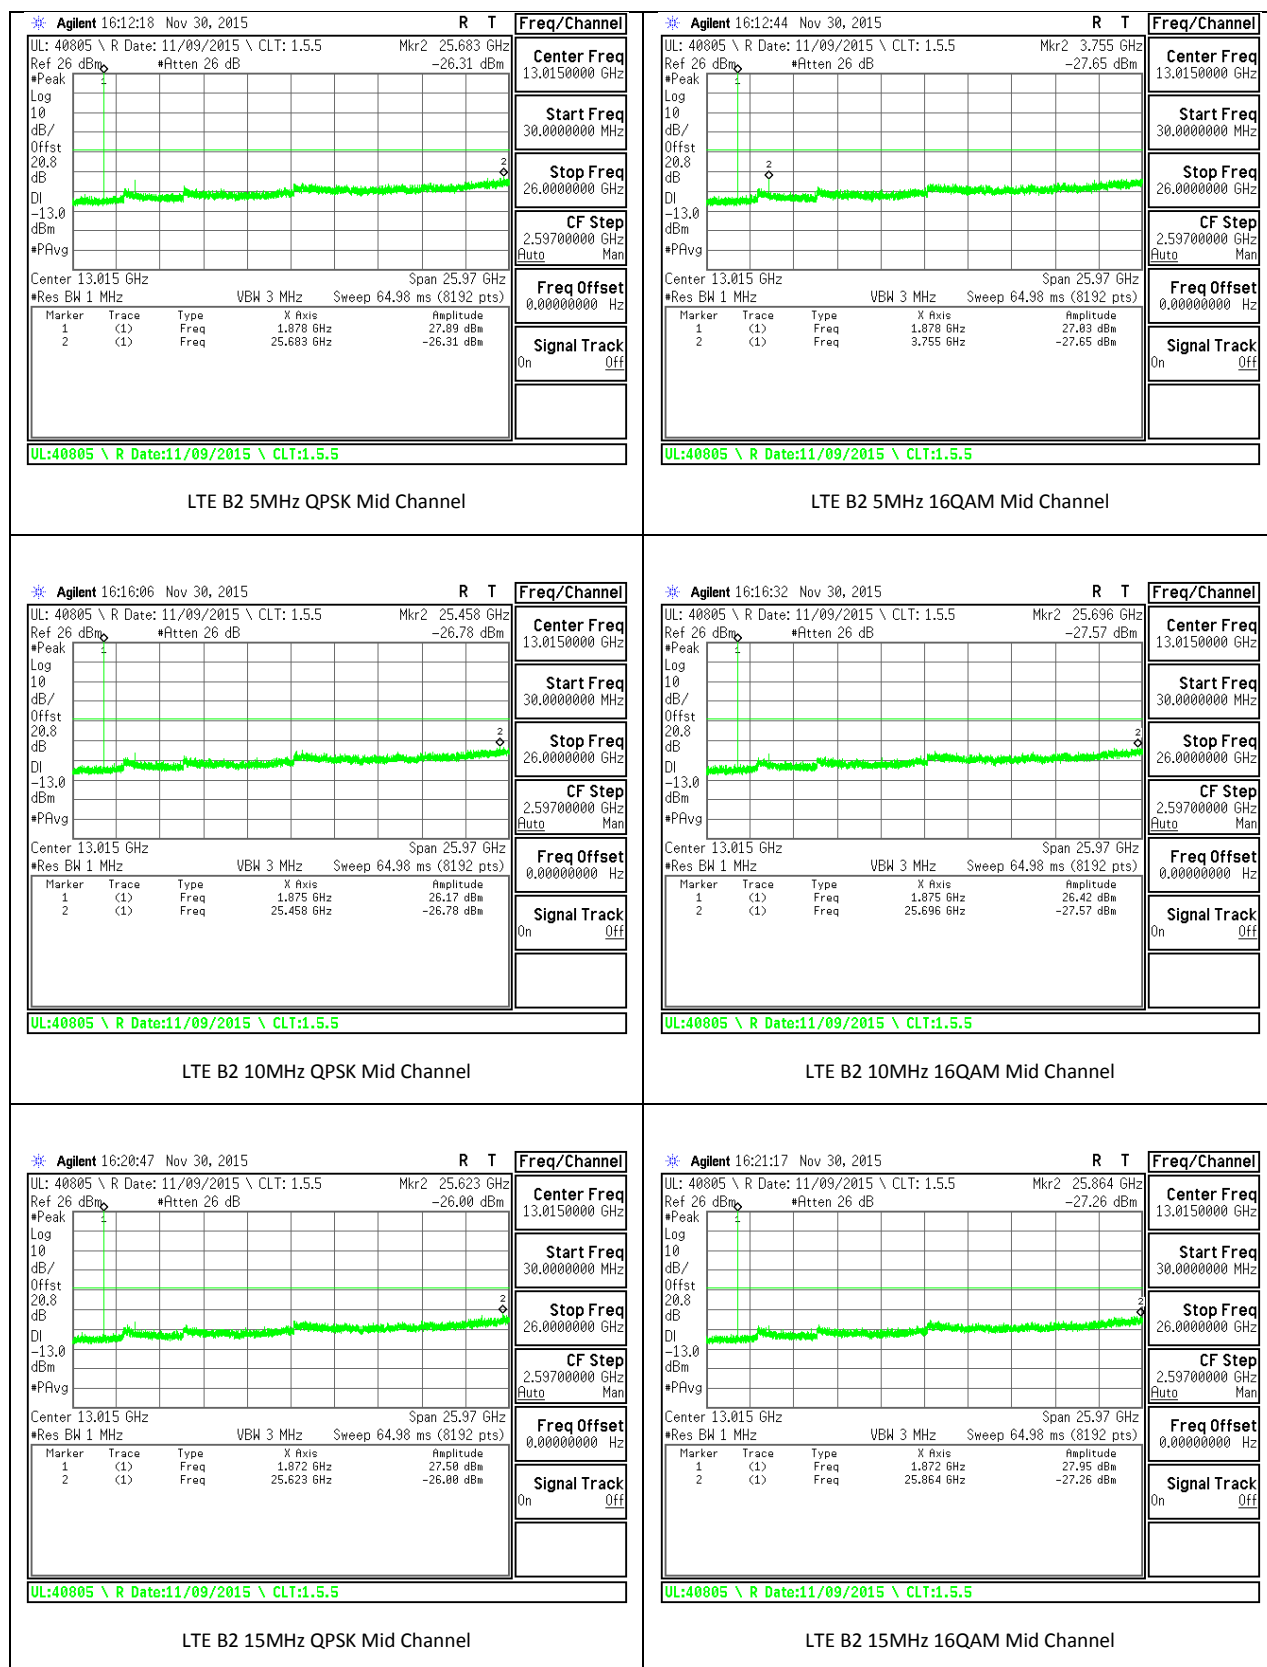


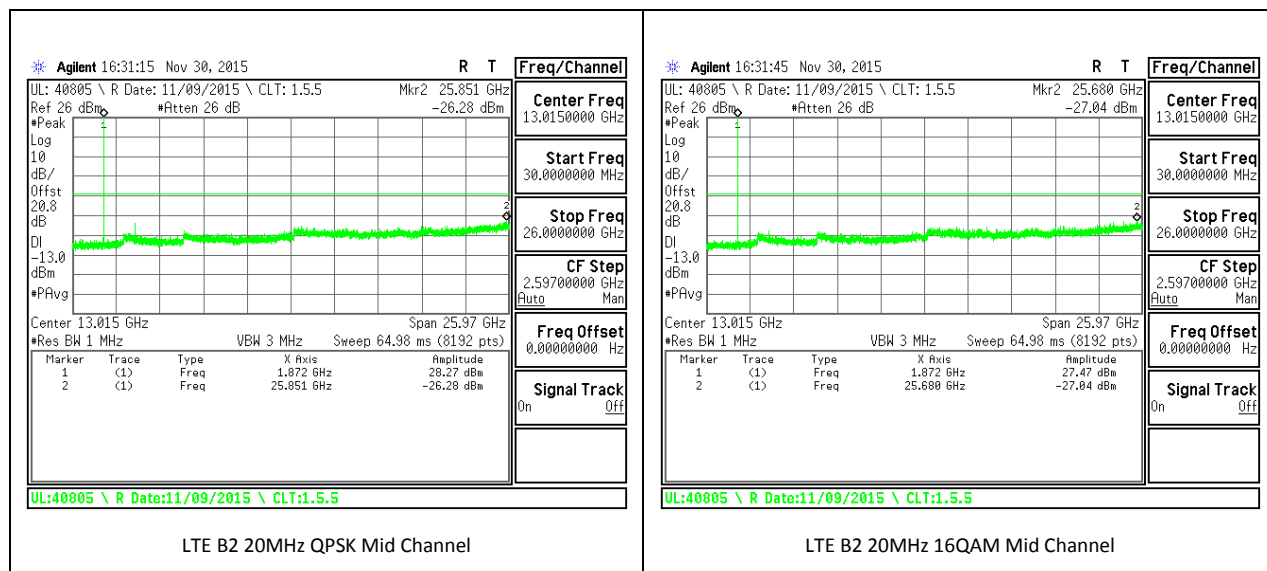



LTE Band 4

BW(MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
1.4	QPSK	1710.7	-27.369	-13	-14.369
		1732.5	-27.278	-13	-14.278
		1754.3	-26.845	-13	-13.845
	16QAM	1710.7	-26.701	-13	-13.701
		1732.5	-26.972	-13	-13.972
		1754.3	-26.446	-13	-13.446
3	QPSK	1711.5	-27.347	-13	-14.347
		1732.5	-27.531	-13	-14.531
		1753.5	-26.633	-13	-13.633
	16QAM	1711.5	-27.696	-13	-14.696
		1732.5	-27.172	-13	-14.172
		1753.5	-27.622	-13	-14.622
5	QPSK	1712.5	-26.643	-13	-13.643
		1732.5	-26.869	-13	-13.869
		1752.5	-27.267	-13	-14.267
	16QAM	1712.5	-27.265	-13	-14.265
		1732.5	-26.127	-13	-13.127
		1752.5	-27.668	-13	-14.668
10	QPSK	1715	-26.86	-13	-13.86
		1732.5	-26.672	-13	-13.672
		1750	-27.31	-13	-14.31
	16QAM	1715	-26.907	-13	-13.907
		1732.5	-27.448	-13	-14.448
		1750	-27.911	-13	-14.911
15	QPSK	1717.5	-27.372	-13	-14.372

	16QAM	1732.5	-26.569	-13	-13.569
		1747.5	-26.44	-13	-13.44
		1717.5	-27.754	-13	-14.754
		1732.5	-26.111	-13	-13.111
		1747.5	-27.23	-13	-14.23
20	QPSK	1720	-27.17	-13	-14.17
		1732.5	-27.76	-13	-14.76
		1745	-26.73	-13	-13.73
	16QAM	1720	-26.33	-13	-13.33
		1732.5	-26.91	-13	-13.91
		1745	-27.25	-13	-14.25

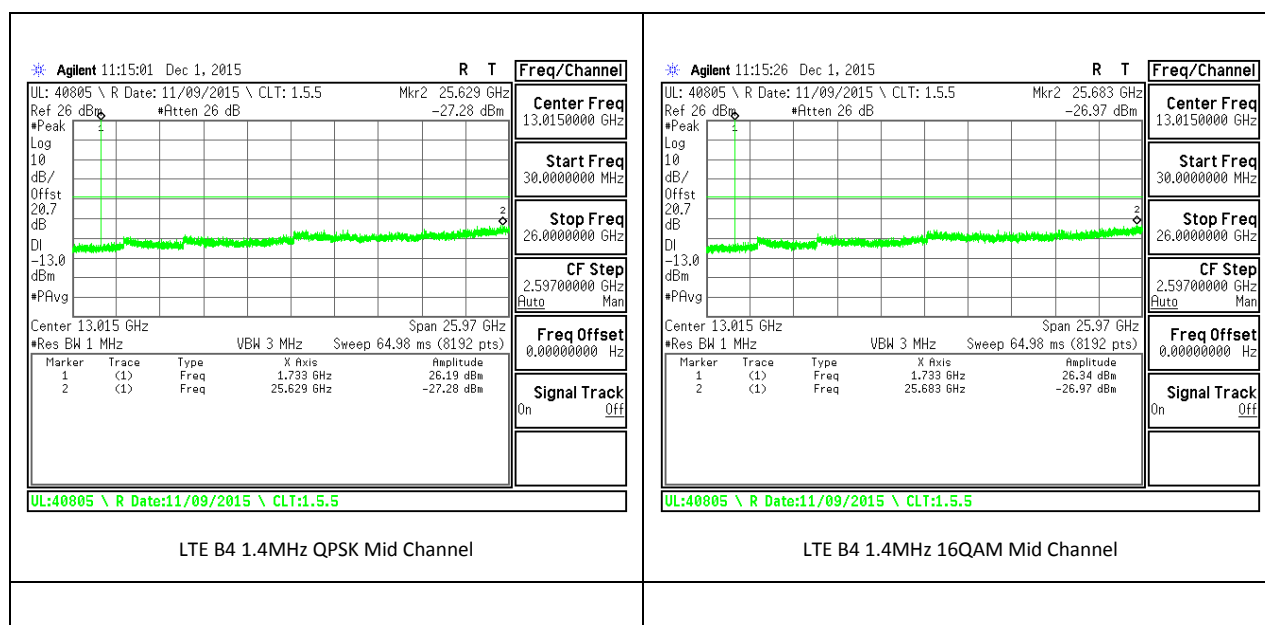

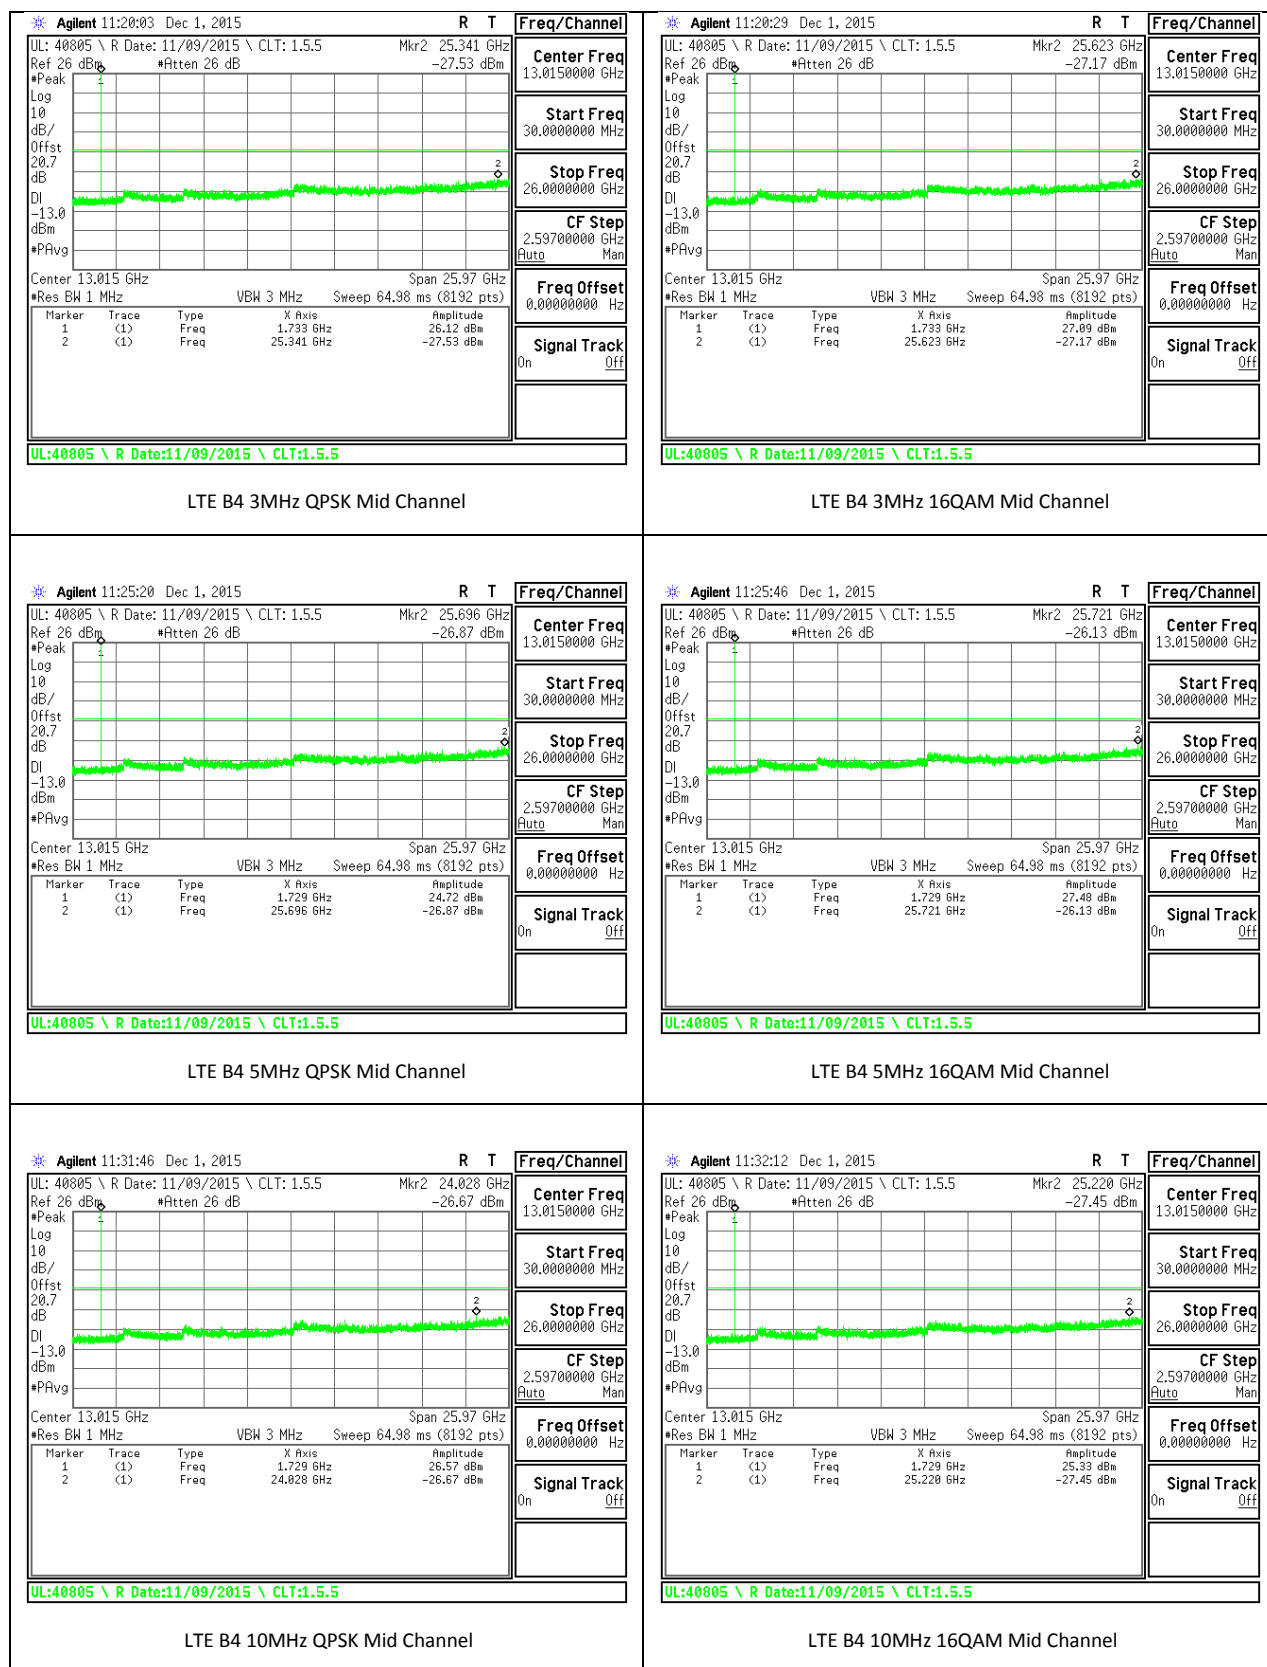

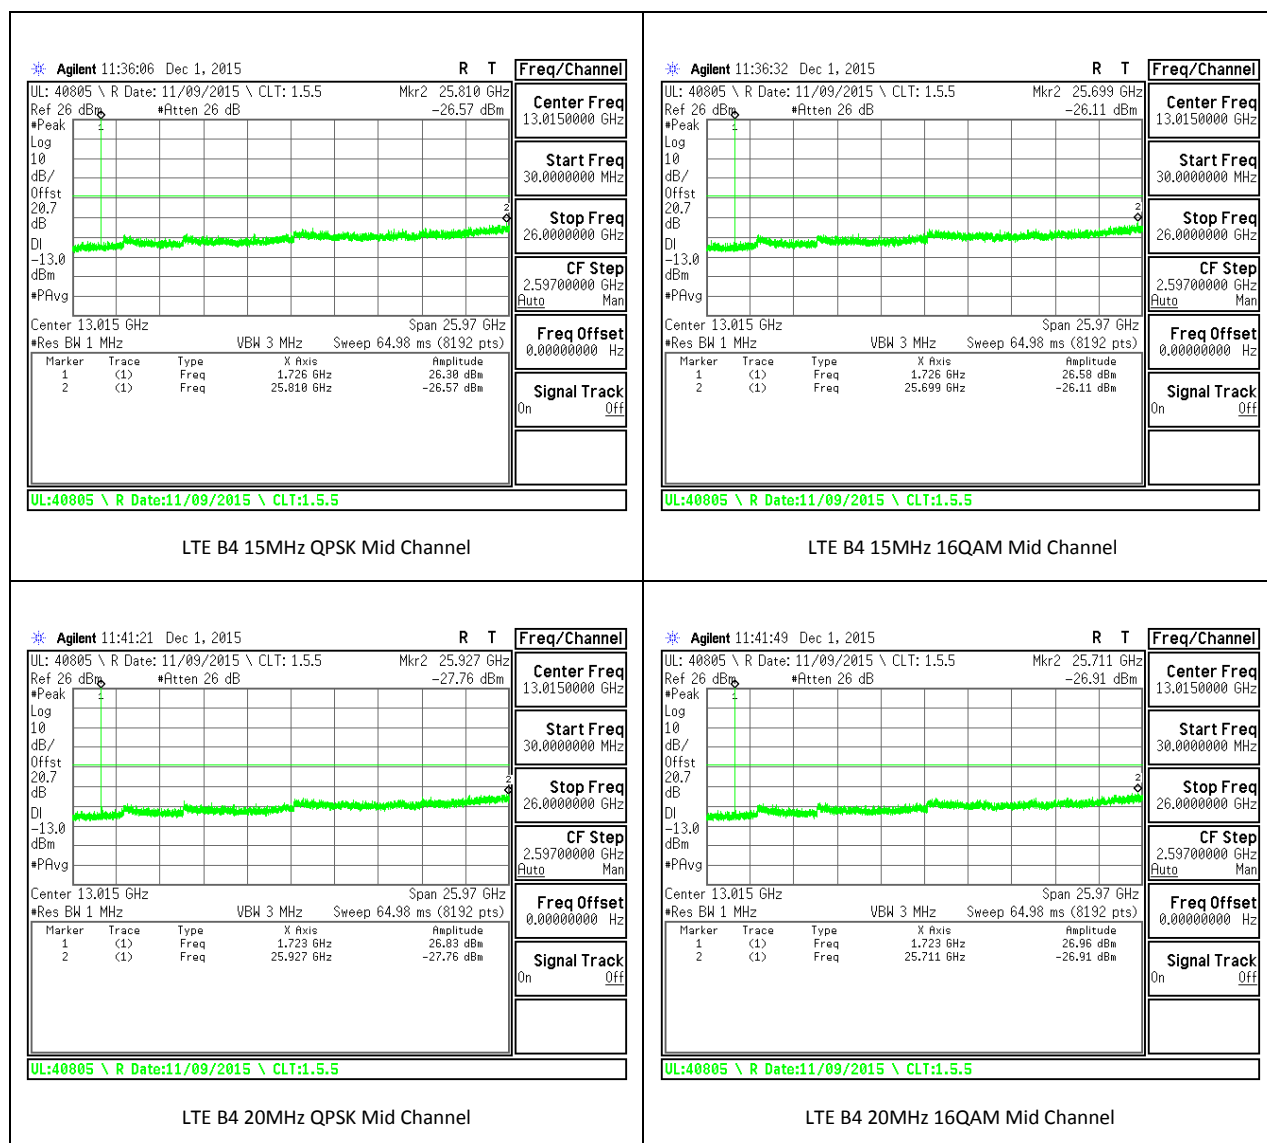

LTE Band 5

BW(MHz)	Mode	f (MHz)	Spur (dBm)	Spec (dBm)	Delta (dB)
1.4	QPSK	824.7	-27.343	-13	-14.343
		836.5	-27.176	-13	-14.176
		848.3	-27.14	-13	-14.14
	16QAM	824.7	-27.9	-13	-14.9
		836.5	-27.359	-13	-14.359
		848.3	-27.693	-13	-14.693
3	QPSK	825.5	-27.316	-13	-14.316
		836.5	-27.385	-13	-14.385
		847.5	-26.76	-13	-13.76
	16QAM	825.5	-26.726	-13	-13.726

		836.5	-26.773	-13	-13.773
		847.5	-26.872	-13	-13.872
5	QPSK	826.5	-27.614	-13	-14.614
		836.5	-27.234	-13	-14.234
		846.5	-27.494	-13	-14.494
	16QAM	826.5	-27.296	-13	-14.296
		836.5	-26.423	-13	-13.423
		846.5	-26.807	-13	-13.807
10	QPSK	829	-27.638	-13	-14.638
		836.5	-27.755	-13	-14.755
		844	-27.13	-13	-14.13
	16QAM	829	-27.648	-13	-14.648
		836.5	-27.675	-13	-14.675
		844	-26.818	-13	-13.818

--	--