



FCC CFR47 PART 22 SUBPART H  
FCC CFR47 PART 24 SUBPART E  
FCC CFR47 PART 27 SUBPART L

**C2PC CERTIFICATION TEST REPORT**

**FOR**

**CDMA/LTE PHONE WITH BT + DTS WLAN b/g/n**

**MODEL NUMBER: LGL62VL, L62VL, LG-L62VL**

**FCC ID: ZNFL62VL**

**REPORT NUMBER: 16I22653-E1V2**

**ISSUE DATE: 2/8/2016**

*Prepared for*  
**LG ELECTRONICS MOBILECOMM U.S.A., INC**  
**1000 SYLVAN AVENUE**  
**ENGLEWOOD CLIFFS,**  
**NEW JERSEY, 07632, U.S.A**

*Prepared by*  
**UL VERIFICATION SERVICES**  
**47173 BENICIA STREET**  
**FREMONT, CA 94538, U.S.A.**  
**TEL: (510) 771-1000**  
**FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

---

**Revision History**

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	1/29/2016	Initial issue	D. CORONIA
V2	2/8/2016	Updated Section 9.1.1	D. CORONIA

**TABLE OF CONTENTS**

**1. ATTESTATION OF TEST RESULTS ..... 4**

**2. TEST METHODOLOGY ..... 5**

**3. FACILITIES AND ACCREDITATION ..... 5**

**4. CALIBRATION AND UNCERTAINTY ..... 5**

    4.1. *MEASURING INSTRUMENT CALIBRATION ..... 5*

    4.2. *SAMPLE CALCULATION ..... 5*

    4.3. *MEASUREMENT UNCERTAINTY..... 6*

**5. EQUIPMENT UNDER TEST ..... 7**

    5.1. *DESCRIPTION OF EUT ..... 7*

    5.2. *MAXIMUM OUTPUT POWER (CDMA)..... 7*

    5.3. *MAXIMUM OUTPUT POWER (LTE)..... 8*

    5.4. *DESCRIPTION OF AVAILABLE ANTENNAS ..... 10*

    5.5. *DESCRIPTION OF TEST SETUP..... 11*

**6. TEST AND MEASUREMENT EQUIPMENT ..... 14**

**7. SUMMARY TABLE ..... 15**

**8. RF POWER OUTPUT VERIFICATION..... 16**

    8.1. *CDMA2000 ..... 16*

        8.1.1. *1xRTT ..... 16*

        8.1.2. *CDMA2000 OUTPUT POWER RESULT ..... 17*

            8.1.1. *1xEV-DO Release 0..... 18*

            8.1.2. *1XEVDO REL 0 OUTPUT POWER RESULT..... 19*

                8.1.1. *1xEV-DO Rev. A..... 20*

                8.1.2. *1xEVDO REV A OUTPUT RESULT..... 21*

    8.2. *LTE OUTPUT POWER RESULT ..... 22*

**9. RADIATED TEST RESULTS ..... 29**

    9.1. *RADIATED POWER (ERP & EIRP) ..... 29*

        9.1.1. *ERP/EIRP RESULTS AND TABLE ..... 30*

    9.2. *FIELD STRENGTH OF SPURIOUS RADIATION..... 40*

        9.2.1. *SPURIOUS EMISSION TEST DATA ..... 41*

**10. SETUP PHOTOS ..... 48**

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** LG ELECTRONICS MOBILECOMM U.S.A., INC.  
**EUT DESCRIPTION:** CDMA/LTE PHONE WITH BT + DTS WLAN b/g/n  
**MODEL:** LGL62VL, L62VL, LG-L62VL  
**SERIAL NUMBER:** 601KPYR000746, 601KPHG000745  
**DATE TESTED:** JANUARY 14-23, 2016

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22H, 24E & 27L	PASS

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revision section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Verification Services Inc. By:

Tested By:



DAN CORONIA  
CONSUMER TECHNOLOGY DIVISION  
WiSE PROJECT LEAD  
UL VERIFICATION SERVICES INC



KIYA KEDIDA  
CONSUMER TECHNOLOGY DIVISION  
WiSE LAB ENGINEER  
UL VERIFICATION SERVICES INC

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-D, FCC CFR 47 Part 22, FCC CFR Part 24, and FCC CFR 47 Part 27.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input checked="" type="checkbox"/> Chamber A	<input type="checkbox"/> Chamber D
<input type="checkbox"/> Chamber B	<input type="checkbox"/> Chamber E
<input checked="" type="checkbox"/> Chamber C	<input type="checkbox"/> Chamber F
	<input type="checkbox"/> Chamber G
	<input type="checkbox"/> Chamber H

The above test sites and facilities are covered under FCC Test Firm Registration # 208313.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0.

Chambers A through H are covered under Industry Canada company address code 2324B with site numbers 2324B -1 through 2324B-8, respectively.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$EIRP = \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss (between the SG and substitution antenna)} + \text{Substitution Antenna Factor (dBi)}$

$ERP = \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss (between the SG and substitution antenna)}$

(Path loss = Signal generator output – PSA reading with substitution antenna)

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 9KHz to 30 MHz	2.14 dB
Radiated Disturbance, 30 to 1000 MHz	4.98 dB
Radiated Disturbance, 1000 to 6000 MHz	3.86 dB
Radiated Disturbance, 6000 to 18000 MHz	4.23 dB
Radiated Disturbance, 18000 to 26000 MHz	5.30 dB
Radiated Disturbance, 26000 to 40000 MHz	5.23 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

This EUT is a CDMA/LTE PHONE WITH BT + DTS WLAN b/g/n

### 5.2. MAXIMUM OUTPUT POWER (CDMA)

The transmitter has a maximum peak conducted and radiated ERP / EIRP output powers as follows:

FCC Part 22/24						
Band	Frequency Range(MHz)	Modulation	Conducted		Radiated	
			AVG(dBm)	AVG(mW)	AVG(dBm)	AVG(mW)
BC0	824~849	1xRTT	24.2	263.03	23.02	200.45
	824~849	EVDO REL. 0	24.2	263.03	23.06	202.30
	824~849	EVDO REV. A	24.2	263.03		
BC1	1850~1910	1xRTT	24.7	295.12	25.41	347.54
	1850~1910	EVDO REL. 0	24.7	295.12	25.34	341.98
	1850~1910	EVDO REV. A	24.7	295.12		

### 5.3. MAXIMUM OUTPUT POWER (LTE)

The transmitter has a maximum peak conducted and radiated ERP/EIRP output powers as follows:

FCC Part 24							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation	Conducted		Radiated	
				AVG(dBm)	AVG(mW)	AVG(dBm)	AVG(mW)
LTE2	1850~1910	1.4MHz	QPSK	24.0	251.19	24.26	266.69
			16QAM	23.2	208.93	23.73	236.05
		3MHz	QPSK	24.0	251.19	24.16	260.62
			16QAM	23.2	208.93	23.76	237.68
		5MHz	QPSK	23.9	245.47	24.35	272.27
			16QAM	23.2	208.93	24.26	266.69
		10MHz	QPSK	23.9	245.47	24.60	288.40
			16QAM	23.2	208.93	24.01	251.77
		15MHz	QPSK	24.2	263.03	23.97	249.46
			16QAM	23.2	208.93	23.46	221.82
		20MHz	QPSK	24.2	263.03	23.76	237.68
			16QAM	23.2	208.93	23.16	207.01

FCC Part 27							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation	Conducted		Radiated	
				AVG(dBm)	AVG(mW)	AVG(dBm)	AVG(mW)
LTE4	1710~1755	1.4MHz	QPSK	23.8	239.88	23.81	240.44
			16QAM	23.4	218.78	23.52	224.91
		3MHz	QPSK	23.8	239.88	23.95	248.31
			16QAM	23.4	218.78	23.62	230.14
		5MHz	QPSK	23.9	245.47	23.68	233.35
			16QAM	23.2	208.93	23.32	214.78
		10MHz	QPSK	23.9	245.47	24.17	261.22
			16QAM	23.4	218.78	23.52	224.91
		15MHz	QPSK	23.8	239.88	23.92	246.60
			16QAM	23.4	218.78	23.43	220.29
		20MHz	QPSK	24.3	269.15	23.97	249.46
			16QAM	23.4	218.78	23.56	226.99

FCC Part 27							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation	Conducted		Radiated	
				AVG(dBm)	AVG(mW)	AVG(dBm)	AVG(mW)
LTE13	777~787	5MHz	QPSK	24.2	263.03	21.86	153.46
			16QAM	22.7	186.21	21.24	133.05
		10MHz	QPSK	24.0	251.19	22.04	159.96
			16QAM	23.2	208.93	21.49	140.93

#### 5.4. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PIFA antenna for the [List the bands supported] with a maximum peak gain as follow:

Frequency (MHz)	Peak Gain (dBi)
LTE B2, 1850~1910MHz	-0.62
LTE B4, 1710~1755MHz	-1.24
LTE B13, 777~787MHz	-6.66
BC0, 824~849MHz	-2.41
BC1, 1850~1910MHz	-0.62

## 5.5. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	LG	MMCS-02WRE	N/A	N/A
Earphone	LG	N/A	N/A	N/A

### I/O CABLES (CONDUCTED SETUP)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF Out	1	Spectrum Analyzer	Shielded	None	NA
2	Antenna Port	1	EUT	Shielded	0.1m	NA
3	RF In/Out	1	Communication Test Set	Shielded	1m	NA


### I/O CABLES (RADIATED SETUP)

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	USB	1	AC Adapter	Un-shielded	1.2m	No
2	Jack	1	Headset	Shielded	1m	No
3	RF In/out	1	Communication Test Set	Un-shielded	2m	Yes


### TEST SETUP

The EUT is continuously communicated to the call box during the tests.

**SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)**

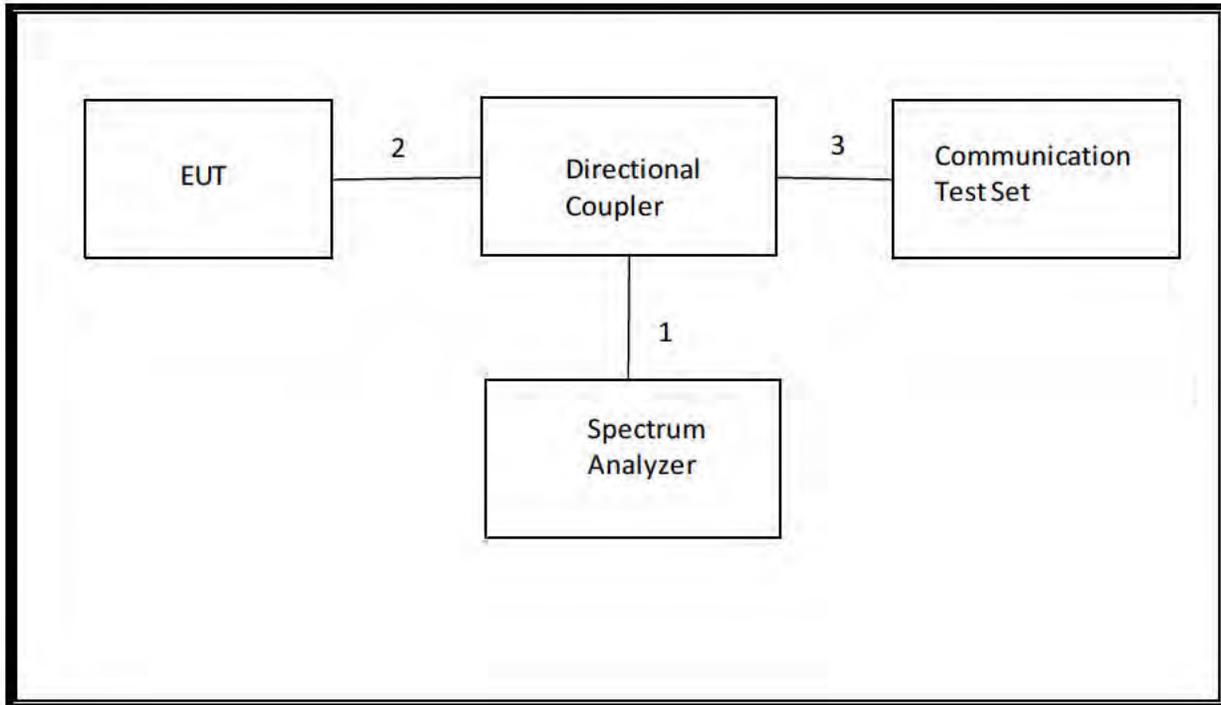

**SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)**

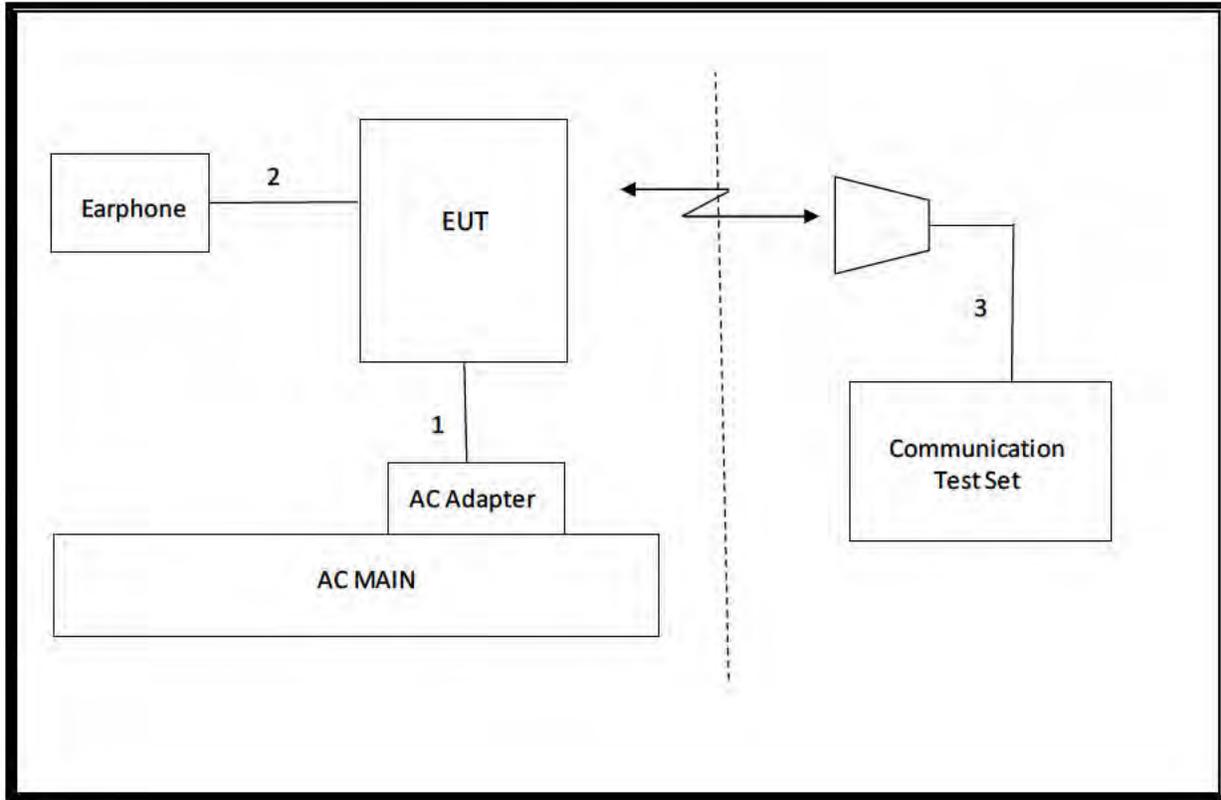

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	T Number	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	123	10/22/16
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	130	06/10/16
Antenna, Horn, 18 GHz	EMCO	3115	59	11/18/16
Highpass Filter, 2.7 GHz	Micro-Tronics	HPM13194	151	CNR
Highpass Filter, 1.5 GHz	Micro-Tronics	HPM13193	153	CNR
Temperature / Humidity Chamber	Thermotron	SE 600-10-10	80	05/15/16
Communications Test Set	R&S	CMW500	159	07/10/16
DC power supply, 8 V @ 3 A or 15 V	Agilent / HP	E3610A	None	CNR
Vector signal generator, 6 GHz	Agilent / HP	E4438C	None	06/16/16
Antenna, Tuned Dipole 400~1000	ETS	3121C DB4	273	05/05/16
Directional Coupler	RF-Lambda	RFDC5M06G15	None	CNR
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	447	05/18/16

Test Software List			
Description	Manufacturer	Model	Version
Radiated Software	UL	UL EMC	Ver 9.5, June 24, 2015
Conducted Software	UL	UL EMC	Ver 9.5, May 26, 2015
CLT Software	UL	UL RF	Ver 1.0, Feb 2, 2015
Antenna Port Software	UL	UL RF	Ver 3.7, Nov 12, 2015

## 7. SUMMARY TABLE

C2PC Reason: Please see LGL62VL FCC Class II change description for details.

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result
2.1049	N/A	Occupied Bandwidth (99%)	N/A	Conducted	Refer to Original
22.917(a) 24.238(a) 27.53(g)	RSS-132(4.5.1) RSS-133(6.5.1) RSS-139(6.5.1)	Band Edge / Conducted Spurious Emission	-13dBm		Refer to Original
2.1046	N/A	Conducted output power	N/A		Pass
22.355 24.235 27.54	RSS-132(4.3) RSS-133(6.3) RSS-139(6.3)	Frequency Stability	2.5PPM		Refer to Original
22.913(a)(2)	RSS-132(4.4)	Effective Radiated Power	38 dBm	Radiated	Pass
27.50(c)(10)	N/A		34.77 dBm		Pass
24.232(c) 27.50(h)(2)	RSS-133(6.4)	Equivalent Isotropic Radiated Power	33dBm		Pass
27.50(d)(4)	RSS-139(6.4)		30dBm		Pass
22.917(a) 24.238(a) 27.53(g)	RSS-132(4.5.1) RSS-133(6.5.1) RSS-139(6.5.1)	Radiated Spurious Emission	-13dBm		Pass



**8.1.2. CDMA2000 OUTPUT POWER RESULT**

Band	Mode	Ch	Freq. (MHz)	Avg Pwr (dBm)
BC0	RC1, SO55 (Loopback)	1013	824.70	24.0
		384	836.52	24.1
		777	848.31	24.2
	RC3, SO55 (Loopback)	1013	824.70	24.0
		384	836.52	24.1
		777	848.31	24.2
	RC3, SO32 (+F-SCH)	1013	824.70	24.0
		384	836.52	24.1
		777	848.31	24.2

Band	Mode	Ch	Freq. (MHz)	Avg Pwr (dBm)
BC1	RC1, SO55 (Loopback)	25	1851.25	24.7
		600	1880.00	24.5
		1175	1908.75	24.4
	RC3, SO55 (Loopback)	25	1851.25	24.7
		600	1880.00	24.6
		1175	1908.75	24.4
	RC3, SO32 (+F-SCH)	25	1851.25	24.7
		600	1880.00	24.7
		1175	1908.75	24.5

### 8.1.1. 1xEV-DO Release 0

#### TEST PROCEDURE

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev, License</u>
1xEV-DO Terminal Test	A.09.13

#### EVDO Release 0 - RTAP

- Call Setup > Shift & Preset
- Call Control:
  - Access Network Info > Cell Parameters > Sector ID > 00000000 > Subnet Mask > 0
  - Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
- Call Params:
  - Cell Power > -105.5 dBm/1.23 MHz
  - Cell Band > (Select US Cellular or US PCS)
  - Channel > (Enter channel number)
  - Application Config > Enhanced Test Application Protocol > RTAP
  - RTAP Rate > 153.6 kbps
  - Rvs Power Ctrl > Active bits
  - Protocol Rel > 0 (1xEV-DO)
- Press "Start Data Connection" when "Session Open" appear in "Active Cell"
- Rvs Power Ctrl > All Up bits (Maximum TxPout)

#### EVDO Release 0 - FTAP

- Call Setup > Shift & Preset
- Call Control:
  - Access Network Info > Cell Parameters > Sector ID > 00000000 > Subnet Mask > 0
  - Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots
- Call Params:
  - Cell Power > -105.5 dBm/1.23 MHz
  - Cell Band > (Select US Cellular or US PCS)
  - Channel > (Enter channel number)
  - Application Config > Enhanced Test Application Protocol > FTAP (default)
  - FTAP Rate > 307.2 kbps (2 Slot, QPSK)
  - Rvs Power Ctrl > Active bits
  - Protocol Rel > 0 (1xEV-DO)
- Press "Start Data Connection" when "Session Open" appear in "Active Cell"
- Rvs Power Ctrl > All Up bits (Maximum TxPout)

**8.1.2. 1XEVD0 REL 0 OUTPUT POWER RESULT**

Band	Mode	Ch	Freq. (MHz)	Avg Pwr (dBm)
BC0	Fwd11/Rvs8 SO75 (Loopback)	1013	824.70	24.0
		384	836.52	24.1
		777	848.31	24.2

Band	Mode	Ch	Freq. (MHz)	Avg Pwr (dBm)
BC1	Fwd11/Rvs8 SO75 (Loopback)	25	1851.25	24.7
		600	1880.00	24.6
		1175	1908.75	24.5

### 8.1.1. 1xEV-DO Rev. A

#### TEST PROCEDURE

This procedure assumes the Agilent 8960 Test Set has the following applications installed and with valid license.

<u>Application</u>	<u>Rev, License</u>
1xEV-DO Terminal Test	A.09.13

#### EVDO Release A – RETAP

- Call Setup > Shift & Preset
- Cell Power > -60 dBm/1.23 MHz
- Protocol Rev > A (1xEV-DO-A)
- Application Config > Enhanced Test Application Protocol > RETAP
- R-Data Pkt Size > 4096
- Protocol Subtype Config > Release A Physical Layer Subtype > Subtype 2
- > PL Subtype 2 Access Channel MAC Subtype > Default (Subtype 0)
- Access Network Info > Cell Parameters > Sector ID > 00000000 > Subnet Mask > 0
- Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots > ACK R-Data After > Subpacket 0 (All ACK)
- Rvs Power Ctrl > All Up bits (to get the maximum power)

#### EVDO Release A - FETAP

- Call Setup > Shift & Preset
- Cell Power > -60 dBm/1.23 MHz
- Protocol Rev > A (1xEV-DO-A)
- Application Config > Enhanced Test Application Protocol > FETAP
- F-Traffic Format > 4 (1024, 2,128) Canonical (307.2k, QPSK)
- Protocol Subtype Config > Release A Physical Layer Subtype > Subtype 2
- > PL Subtype 2 Access Channel MAC Subtype > Default (Subtype 0)
- Access Network Info > Cell Parameters > Sector ID > 00000000 > Subnet Mask > 0
- Generator Info > Termination Parameters > Max Forward Packet Duration > 16 Slots > ACK R-Data After > Subpacket 0 (All ACK)
- Rvs Power Ctrl > All Up bits (to get the maximum power)

**8.1.2. 1xEVDO REV A OUTPUT RESULT**

Band	FETAP Traffic Format	Channel	f (MHz)	Avg Pwr (dBm)
BC0	307.2k, QPSK/ ACK channel is transmitted at all the slots	1013	824.70	24.0
		384	836.52	24.1
		777	848.31	24.2

Band	FETAP Traffic Format	Channel	f (MHz)	Avg Pwr (dBm)
BC1	307.2k, QPSK/ ACK channel is transmitted at all the slots	25	1851.25	24.7
		600	1880.00	24.6
		1175	1908.75	24.5

## 8.2. LTE OUTPUT POWER RESULT

### LTE Band 2

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						18607	18900	19193
						1850.7 MHz	1880 MHz	1909.3 MHz
LTE Band 2	1.4	QPSK	1	0	0	23.8	23.8	23.7
			1	2	0	23.7	23.9	23.7
			1	5	0	23.7	24.0	23.7
			3	0	0	23.9	23.8	23.7
			3	2	0	23.8	23.9	23.8
			3	3	0	23.9	23.9	23.9
		16QAM	1	0	1	23.2	23.2	23.1
			1	2	1	23.2	23.2	23.1
			1	5	1	23.2	23.2	23.1
			3	0	1	23.2	22.8	23.2
			3	2	1	23.0	22.9	23.2
			3	3	1	22.9	23.1	23.2
			6	0	2	21.9	21.7	22.0
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						18615	18900	19185
						1851.5 MHz	1880 MHz	1908.5 MHz
LTE Band 2	3	QPSK	1	0	0	23.8	23.9	23.5
			1	7	0	23.7	24.0	23.9
			1	14	0	23.7	23.7	23.8
			8	0	1	23.0	22.9	23.0
			8	4	1	22.9	23.0	22.9
			8	7	1	22.9	23.0	23.0
			15	0	1	22.9	23.0	23.0
		16QAM	1	0	1	23.2	23.1	23.2
			1	7	1	23.2	23.2	23.2
			1	14	1	23.1	23.2	23.2
			8	0	2	22.1	22.1	22.0
			8	4	2	22.1	22.1	21.9
			8	7	2	22.1	22.2	21.9
			15	0	2	21.9	21.9	22.0

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						18625	18900	19175
						1852.5 MHz	1880 MHz	1907.5 MHz
LTE Band 2	5	QPSK	1	0	0	23.9	23.8	23.6
			1	12	0	23.8	23.9	23.8
			1	24	0	23.7	23.8	23.7
			12	0	1	23.0	23.0	23.0
			12	6	1	22.9	23.1	23.0
			12	13	1	22.9	23.1	23.0
			25	0	1	23.0	23.0	23.0
		16QAM	1	0	1	23.1	22.8	23.0
			1	12	1	23.1	22.7	23.0
			1	24	1	23.2	22.8	23.0
			12	0	2	21.9	21.8	22.1
			12	6	2	21.8	21.9	22.1
			12	13	2	22.0	22.0	22.1
			25	0	2	22.0	22.1	22.1
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						18650	18900	19150
						1855 MHz	1880 MHz	1905 MHz
LTE Band 2	10	QPSK	1	0	0	23.9	23.9	23.8
			1	25	0	23.8	23.8	23.9
			1	49	0	23.9	23.9	23.7
			25	0	1	23.0	23.0	22.9
			25	12	1	23.0	23.0	23.0
			25	25	1	23.0	23.1	23.0
			50	0	1	23.1	23.1	22.9
		16QAM	1	0	1	23.0	23.2	23.2
			1	25	1	23.2	23.2	23.2
			1	49	1	23.2	23.2	23.2
			25	0	2	22.2	22.1	22.0
			25	12	2	22.1	22.0	22.1
			25	25	2	22.1	22.1	22.0
			50	0	2	22.1	21.9	22.0

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						18675	18900	19125
						1857.5 MHz	1880 MHz	1902.5 MHz
LTE Band 2	15	QPSK	1	0	0	24.2	24.2	24.1
			1	36	0	24.2	24.1	23.9
			1	74	0	24.0	24.1	23.9
			36	0	1	23.1	23.1	22.9
			36	18	1	23.1	23.1	23.0
			36	37	1	23.1	23.0	23.0
			75	0	1	23.1	23.0	22.9
		16QAM	1	0	1	23.2	23.0	23.2
			1	36	1	23.2	23.2	23.2
			1	74	1	23.2	23.2	23.2
			36	0	2	22.1	22.0	21.9
			36	18	2	22.1	22.1	22.0
			36	37	2	22.0	22.0	22.1
			75	0	2	22.1	22.0	21.9
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						18700	18900	19100
						1860 MHz	1880 MHz	1900 MHz
LTE Band 2	20	QPSK	1	0	0	24.2	24.2	24.2
			1	50	0	24.2	24.2	24.2
			1	99	0	23.9	24.0	23.8
			50	0	1	23.1	23.2	23.1
			50	25	1	23.1	23.2	23.0
			50	50	1	23.1	23.1	23.0
			100	0	1	23.2	23.2	23.0
		16QAM	1	0	1	23.2	23.2	23.2
			1	50	1	23.2	23.1	23.2
			1	99	1	23.2	23.0	22.9
			50	0	2	22.1	22.1	22.0
			50	25	2	22.1	22.1	21.9
			50	50	2	22.1	22.0	22.0
			100	0	2	22.2	22.2	22.0

**LTE Band 4**

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						19957	20175	20393
						1710.7 MHz	1732.5 MHz	1754.3 MHz
LTE Band 4	1.4	QPSK	1	0	0	23.4	23.5	23.4
			1	2	0	23.4	23.5	23.7
			1	5	0	23.4	23.3	23.6
			3	0	0	23.5	23.4	23.7
			3	2	0	23.5	23.5	23.8
			3	3	0	23.5	23.5	23.7
		16QAM	1	0	1	22.8	23.3	23.1
			1	2	1	23.0	23.4	23.3
			1	5	1	22.9	23.4	23.2
			3	0	1	22.6	23.1	23.1
			3	2	1	22.5	22.6	23.4
			3	3	1	22.5	22.6	23.3
		6	0	2	21.8	21.6	22.1	
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						19965	20175	20385
						1711.5 MHz	1732.5 MHz	1753.5 MHz
LTE Band 4	3	QPSK	1	0	0	23.8	23.5	23.7
			1	7	0	23.7	23.4	23.7
			1	14	0	23.8	23.4	23.7
			8	0	1	22.9	22.8	23.0
			8	4	1	22.8	22.9	23.1
			8	7	1	23.0	23.0	23.0
			15	0	1	22.9	22.8	23.1
		16QAM	1	0	1	23.4	23.0	23.4
			1	7	1	23.4	23.1	23.3
			1	14	1	23.4	22.9	23.4
			8	0	2	21.9	21.9	22.1
			8	4	2	21.9	22.0	22.2
			8	7	2	21.9	21.9	21.8
			15	0	2	21.9	21.8	22.1

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						19975	20175	20375
						1712.5 MHz	1732.5 MHz	1752.5 MHz
LTE Band 4	5	QPSK	1	0	0	23.6	23.7	23.5
			1	12	0	23.9	23.8	23.6
			1	24	0	23.4	23.5	23.7
			12	0	1	22.9	22.9	23.0
			12	6	1	22.9	22.9	23.0
			12	13	1	22.9	22.9	23.1
			25	0	1	22.9	22.9	23.0
		16QAM	1	0	1	23.0	22.8	23.4
			1	12	1	23.1	22.4	22.9
			1	24	1	23.2	22.6	22.8
			12	0	2	22.0	21.8	21.9
			12	6	2	21.8	21.8	21.9
			12	13	2	21.9	21.9	22.2
			25	0	2	22.0	22.0	22.2
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20000	20175	20350
						1715 MHz	1732.5 MHz	1750 MHz
LTE Band 4	10	QPSK	1	0	0	23.9	23.5	23.6
			1	25	0	23.7	23.6	23.5
			1	49	0	23.7	23.4	23.7
			25	0	1	22.9	22.9	22.9
			25	12	1	22.9	22.9	22.9
			25	25	1	23.0	22.8	23.0
			50	0	1	23.0	22.9	23.0
		16QAM	1	0	1	23.1	23.1	23.1
			1	25	1	23.2	23.1	23.4
			1	49	1	23.4	23.0	23.4
			25	0	2	22.0	22.1	22.0
			25	12	2	22.1	22.0	21.8
			25	25	2	21.9	21.9	21.8
			50	0	2	22.1	21.8	21.8

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20025	20175	20325
						1717.5 MHz	1732.5 MHz	1747.5 MHz
LTE Band 4	15	QPSK	1	0	0	23.8	23.8	23.8
			1	36	0	23.6	23.7	23.4
			1	74	0	23.7	23.7	23.5
			36	0	1	23.0	23.0	23.1
			36	18	1	23.0	23.0	22.9
			36	37	1	22.8	22.8	23.0
			75	0	1	22.8	22.9	23.0
		16QAM	1	0	1	23.4	23.4	23.4
			1	36	1	23.3	23.4	23.4
			1	74	1	23.3	23.4	23.4
			36	0	2	22.1	22.1	21.9
			36	18	2	22.1	22.1	21.8
			36	37	2	21.9	21.9	21.8
			75	0	2	21.9	21.9	21.9
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)		
						20050	20175	20300
						1720 MHz	1732.5 MHz	1745 MHz
LTE Band 4	20	QPSK	1	0	0		24.2	
			1	50	0		24.3	
			1	99	0		24.2	
			50	0	1		23.0	
			50	25	1		23.0	
			50	50	1		23.0	
			100	0	1		23.0	
		16QAM	1	0	1		23.4	
			1	50	1		23.3	
			1	99	1		23.2	
			50	0	2		22.1	
			50	25	2		22.0	
			50	50	2		21.7	
			100	0	2		21.9	

**LTE Band 13**

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)	
						23230	782 MHz
						LTE Band 13	5
		1	12	0	24.2		
		1	24	0	24.0		
		12	0	1	22.9		
		12	6	1	22.9		
		12	13	1	22.9		
		25	0	1	22.8		
		16QAM	1	0	1	22.7	
			1	12	1	22.5	
			1	24	1	22.6	
			12	0	2	21.7	
			12	6	2	21.9	
			12	13	2	21.9	
			25	0	2	22.1	
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Avg Pwr (dBm)	
						23230	782 MHz
						LTE Band 13	10
		1	25	0	24.0		
		1	49	0	24.0		
		25	0	1	22.9		
		25	12	1	22.9		
		25	25	1	22.9		
		50	0	1	22.9		
		16QAM	1	0	1	22.7	
			1	25	1	23.2	
			1	49	1	23.1	
			25	0	2	22.0	
			25	12	2	21.9	
			25	25	2	22.0	
			50	0	2	22.0	

## 9. RADIATED TEST RESULTS

### 9.1. RADIATED POWER (ERP & EIRP)

#### RULE PART(S)

FCC: §2. 1046, §22. 913, §24. 232, §27

#### LIMITS

22.913 (a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

24.232 (c) - Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

27.50 (b) - (10) Portable stations (handheld devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP. (LTE B13)

27.50 (c) - (10) Portable stations (handheld devices) are limited to 3 watts ERP; (LTE B17)

27.50 (d) - (4) Fixed, mobile, and portable (handheld) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.(Band 4)

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13dB.

#### TEST PROCEDURE

ANSI / TIA / EIA 603D Clause 2.2.17; PSA setting reference to 971168 D01 v02r02

For peak power measurement with a PSA:

a) Set the RBW  $\geq$  OBW; b) Set VBW  $\geq 3 \times$  RBW; c) Set span  $\geq 2 \times$  RBW; d) Sweep time = auto couple; e) Detector = peak; f) Ensure that the number of measurement points  $\geq$  span/RBW; g) Trace mode = max hold;

For average power measurement with a PSA:

a) Set span to at least 1.5 times the OBW; b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz; c) Set VBW  $\geq 3 \times$  RBW; d) Set number of points in sweep  $\geq 2 \times$  span / RBW; e) Sweep time = auto-couple; f) Detector = RMS (power averaging); g) Use free run trigger If burst duty cycle  $\geq 98$ ; h) Use trigger to capture bursts If burst duty cycle  $< 98$ ; i) Trace average at least 100 traces in power averaging (*i.e.*, RMS) mode. j) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function.

**9.1.1. ERP/EIRP RESULTS AND TABLE**

**CDMA**

Band	Mode	Channel	f(MHz)	ERP/EIRP	
				dBm	mW
BC0	1xRTT	1013	824.7	23.02	200.45
		384	836.52	22.77	189.23
		777	848.31	21.97	157.40
	EVDO REL. 0	1013	824.7	23.06	202.30
		384	836.52	22.96	197.70
		777	848.31	22.00	158.49
BC1	1xRTT	25	1851.25	25.04	319.15
		600	1880.0	25.41	347.54
		1175	1908.75	25.04	319.15
	EVDO REL. 0	25	1851.25	25.34	341.98
		600	1880.0	25.33	341.19
		1175	1908.75	25.11	324.34

BC0 1xRTT										BC0 EVDO Rel.0									
High Frequency Substitution Measurement UL Verification Services, Inc.										High Frequency Substitution Measurement UL Verification Services, Inc.									
<b>Company:</b> LG Electronics					<b>Project #:</b> 16I22653					<b>Company:</b> LG Electronics					<b>Project #:</b> 16I22653				
<b>Date:</b> 1/14/2016					<b>Test Engineer:</b> R.Alsge					<b>Date:</b> 1/14/2016					<b>Test Engineer:</b> R.Alsge				
<b>Configuration:</b> Z-pos EUT Only					<b>Location:</b> Chamber A					<b>Configuration:</b> Z-pos EUT Only					<b>Location:</b> Chamber A				
<b>Mode:</b> RTT BC0 Fundamentals					<b>Test Equipment:</b>					<b>Mode:</b> EVDO BC0 Fundamentals					<b>Test Equipment:</b>				
Receiving: Hybrid T130, and Chamber A SMA Cables										Receiving: Hybrid T130, and Chamber A SMA Cables									
Substitution: Dipole T416, Xft SMA Cable (SN # SERIALNUMBER) Warehouse										Substitution: Dipole T416, Xft SMA Cable (SN # SERIALNUMBER) Warehouse									
f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	ERP	Limit	Delta	Notes		f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	ERP	Limit	Delta	Notes	
MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)			MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)		
Low Ch										Low Ch									
824.70	23.92	V	0.9	0.0	23.02	38.5	-15.5			824.70	23.96	V	0.9	0.0	23.06	38.5	-15.4		
824.70	7.86	H	0.9	0.0	6.96	38.5	-31.5			824.70	7.93	H	0.9	0.0	7.03	38.5	-31.5		
Mid Ch										Mid Ch									
836.52	23.67	V	0.9	0.0	22.77	38.5	-15.7			836.52	23.86	V	0.9	0.0	22.96	38.5	-15.5		
836.52	9.17	H	0.9	0.0	8.27	38.5	-30.2			836.52	9.03	H	0.9	0.0	8.13	38.5	-30.4		
High Ch										High Ch									
848.31	22.87	V	0.9	0.0	21.97	38.5	-16.5			848.31	22.90	V	0.9	0.0	22.00	38.5	-16.5		
848.31	8.43	H	0.9	0.0	7.53	38.5	-31.0			848.31	8.41	H	0.9	0.0	7.51	38.5	-31.0		
BC1 1xRTT										BC1 EVDO Rel.0									
High Frequency Substitution Measurement UL Verification Services, Inc.										High Frequency Substitution Measurement UL Verification Services, Inc.									
<b>Company:</b> LG Electronics					<b>Project #:</b> 16I22653					<b>Company:</b> LG Electronics					<b>Project #:</b> 16I22653				
<b>Date:</b> 1/14/2016					<b>Test Engineer:</b> R.Alsge					<b>Date:</b> 1/14/2016					<b>Test Engineer:</b> R.Alsge				
<b>Configuration:</b> X-pos EUT Only					<b>Location:</b> Chamber A					<b>Configuration:</b> X-pos EUT Only					<b>Location:</b> Chamber A				
<b>Mode:</b> RTT BC1 Fundamentals					<b>Test Equipment:</b>					<b>Mode:</b> EVDO BC1 Fundamentals					<b>Test Equipment:</b>				
Receiving: Horn T136, and Chamber A SMA Cables										Receiving: Horn T136, and Chamber A SMA Cables									
Substitution: Horn T09, Xft SMA Cable (SN # SERIALNUMBER) Warehouse										Substitution: Horn T09, Xft SMA Cable (SN # SERIALNUMBER) Warehouse									
f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Delta	Notes		f	SG reading	Ant. Pol.	Cable Loss	Antenna Gain	EIRP	Limit	Delta	Notes	
MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)			MHz	(dBm)	(H/V)	(dB)	(dBi)	(dBm)	(dBm)	(dB)		
Low Ch										Low Ch									
1851.25	14.60	V	0.9	8.6	22.30	33.0	-10.7			1851.25	14.79	V	0.9	8.6	22.48	33.0	-10.5		
1851.25	17.34	H	0.9	8.6	25.04	33.0	-8.0			1851.25	17.64	H	0.9	8.6	25.34	33.0	-7.7		
Mid Ch										Mid Ch									
1880.00	14.50	V	0.9	8.6	22.21	33.0	-10.8			1880.00	14.56	V	0.9	8.6	22.27	33.0	-10.7		
1880.00	17.70	H	0.9	8.6	25.41	33.0	-7.6			1880.00	17.62	H	0.9	8.6	25.33	33.0	-7.7		
High Ch										High Ch									
1908.75	14.45	V	0.9	8.6	22.17	33.0	-10.8			1908.75	14.44	V	0.9	8.6	22.16	33.0	-10.8		
1908.75	17.32	H	0.9	8.6	25.04	33.0	-8.0			1908.75	17.39	H	0.9	8.6	25.11	33.0	-7.9		

**LTE Band 2**

BW (MHz)	Mode	RB/RB Size	f(MHz)	EIRP	
				dBm	mW
1.4	QPSK	1/0	1850.7	23.76	237.68
		1/0	1880	23.58	228.03
		1/0	1909.3	24.26	266.69
	16QAM	1/0	1850.7	23.21	209.41
		1/0	1880	23.36	216.77
		1/0	1909.3	23.73	236.05
3	QPSK	1/0	1851.5	23.86	243.22
		1/0	1880	24.16	260.62
		1/0	1908.5	22.69	185.78
	16QAM	1/0	1851.5	23.41	219.28
		1/0	1880	23.76	237.68
		1/0	1908.5	21.96	157.04
5	QPSK	1/0	1852.5	24.35	272.27
		1/0	1880	23.91	246.04
		1/0	1907.5	23.35	216.27
	16QAM	1/0	1852.5	23.21	209.41
		1/0	1880	22.86	193.20
		1/0	1907.5	24.26	266.69
10	QPSK	1/0	1855	24.52	283.14
		1/0	1880	24.60	288.40
		1/0	1905	24.10	257.04
	16QAM	1/0	1855	24.01	251.77
		1/0	1880	23.73	236.05
		1/0	1905	22.73	187.50
15	QPSK	1/0	1857.5	22.96	197.70
		1/0	1880	23.97	249.46
		1/0	1902.5	23.21	209.41
	16QAM	1/0	1857.5	22.06	160.69
		1/0	1880	23.46	221.82
		1/0	1902.5	22.61	182.39
20	QPSK	1/0	1860	22.57	180.72
		1/0	1880	23.11	204.64
		1/0	1900	23.76	237.68
	16QAM	1/0	1860	21.36	136.77
		1/0	1880	22.03	159.59
		1/0	1900	23.16	207.01

1.4MHz QPSK										1.4MHz 16QAM									
High Frequency Substitution Measurement UL Verification Services, Inc.										High Frequency Substitution Measurement UL Verification Services, Inc.									
<b>Company:</b> LG Electronics					<b>Company:</b> LG Electronics					<b>Company:</b> LG Electronics					<b>Company:</b> LG Electronics				
<b>Project #:</b> 1622653					<b>Project #:</b> 1622653					<b>Project #:</b> 1622653					<b>Project #:</b> 1622653				
<b>Date:</b> 1/19/2016					<b>Date:</b> 1/19/2016					<b>Date:</b> 1/19/2016					<b>Date:</b> 1/19/2016				
<b>Test Engineer:</b> Lieu Nguyen					<b>Test Engineer:</b> Lieu Nguyen					<b>Test Engineer:</b> Lieu Nguyen					<b>Test Engineer:</b> Lieu Nguyen				
<b>Configuration:</b> EUT Only					<b>Configuration:</b> EUT Only					<b>Configuration:</b> EUT Only					<b>Configuration:</b> EUT Only				
<b>Location:</b> Chamber C					<b>Location:</b> Chamber C					<b>Location:</b> Chamber C					<b>Location:</b> Chamber C				
<b>Mode:</b> LTE_QPSK Band 2 Fundamentals, 1.4MHz Bandwidth					<b>Mode:</b> LTE_QPSK Band 2 Fundamentals, 1.4MHz Bandwidth					<b>Mode:</b> LTE_16QAM Band 2 Fundamentals, 1.4MHz Bandwidth					<b>Mode:</b> LTE_16QAM Band 2 Fundamentals, 1.4MHz Bandwidth				
<b>Test Equipment:</b> Receiving: Horn T119 and Chamber C SMA Cables Substitution: Horn T59 Substitution, 4ft SMA Cable Warehouse										<b>Test Equipment:</b> Receiving: Horn T119 and Chamber C SMA Cables Substitution: Horn T59 Substitution, 4ft SMA Cable Warehouse									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes		f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch										Low Ch									
1850.70	10.51	V	0.9	8.0	17.62	33.0	-15.4			1850.70	10.38	V	0.9	8.0	17.49	33.0	-15.5		
1850.70	16.65	H	0.9	8.0	23.76	33.0	-9.2			1850.70	16.10	H	0.9	8.0	23.21	33.0	-9.8		
Mid Ch										Mid Ch									
1880.00	8.19	V	0.9	8.0	15.30	33.0	-17.7			1880.00	7.70	V	0.9	8.0	14.81	33.0	-18.2		
1880.00	16.47	H	0.9	8.0	23.58	33.0	-9.4			1880.00	16.25	H	0.9	8.0	23.36	33.0	-9.6		
High Ch										High Ch									
1909.30	14.78	V	0.9	8.0	21.89	33.0	-11.1			1909.30	14.45	V	0.9	8.0	21.56	33.0	-11.4		
1909.30	17.15	H	0.9	8.0	24.26	33.0	-8.7			1909.30	16.62	H	0.9	8.0	23.73	33.0	-9.3		
3MHz QPSK										3MHz 16QAM									
High Frequency Substitution Measurement UL Verification Services, Inc.										High Frequency Substitution Measurement UL Verification Services, Inc.									
<b>Company:</b> LG Electronics					<b>Company:</b> LG Electronics					<b>Company:</b> LG Electronics					<b>Company:</b> LG Electronics				
<b>Project #:</b> 1622653					<b>Project #:</b> 1622653					<b>Project #:</b> 1622653					<b>Project #:</b> 1622653				
<b>Date:</b> 1/19/2016					<b>Date:</b> 1/19/2016					<b>Date:</b> 1/19/2016					<b>Date:</b> 1/19/2016				
<b>Test Engineer:</b> Lieu Nguyen					<b>Test Engineer:</b> Lieu Nguyen					<b>Test Engineer:</b> Lieu Nguyen					<b>Test Engineer:</b> Lieu Nguyen				
<b>Configuration:</b> EUT Only					<b>Configuration:</b> EUT Only					<b>Configuration:</b> EUT Only					<b>Configuration:</b> EUT Only				
<b>Location:</b> Chamber C					<b>Location:</b> Chamber C					<b>Location:</b> Chamber C					<b>Location:</b> Chamber C				
<b>Mode:</b> LTE_QPSK Band 2 Fundamentals, 3MHz Bandwidth					<b>Mode:</b> LTE_QPSK Band 2 Fundamentals, 3MHz Bandwidth					<b>Mode:</b> LTE_16QAM Band 2 Fundamentals, 3MHz Bandwidth					<b>Mode:</b> LTE_16QAM Band 2 Fundamentals, 3MHz Bandwidth				
<b>Test Equipment:</b> Receiving: Horn T119 and Chamber C SMA Cables Substitution: Horn T59 Substitution, 4ft SMA Cable Warehouse										<b>Test Equipment:</b> Receiving: Horn T119 and Chamber C SMA Cables Substitution: Horn T59 Substitution, 4ft SMA Cable Warehouse									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes		f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch										Low Ch									
1851.50	16.75	V	0.9	8.0	23.86	33.0	-9.1			1851.50	16.30	V	0.9	8.0	23.41	33.0	-9.6		
1851.50	16.43	H	0.9	8.0	23.54	33.0	-9.5			1851.50	16.08	H	0.9	8.0	23.19	33.0	-9.8		
Mid Ch										Mid Ch									
1880.00	15.30	V	0.9	8.0	22.41	33.0	-10.6			1880.00	14.93	V	0.9	8.0	22.04	33.0	-11.0		
1880.00	17.05	H	0.9	8.0	24.16	33.0	-8.8			1880.00	16.65	H	0.9	8.0	23.76	33.0	-9.2		
High Ch										High Ch									
1908.50	11.10	V	0.9	8.0	18.21	33.0	-14.8			1908.50	10.68	V	0.9	8.0	17.79	33.0	-15.2		
1908.50	15.58	H	0.9	8.0	22.69	33.0	-10.3			1908.50	14.85	H	0.9	8.0	21.96	33.0	-11.0		
5MHz QPSK										5MHz 16QAM									
High Frequency Substitution Measurement UL Verification Services, Inc.										High Frequency Substitution Measurement UL Verification Services, Inc.									
<b>Company:</b> LG Electronics					<b>Company:</b> LG Electronics					<b>Company:</b> LG Electronics					<b>Company:</b> LG Electronics				
<b>Project #:</b> 1622653					<b>Project #:</b> 1622653					<b>Project #:</b> 1622653					<b>Project #:</b> 1622653				
<b>Date:</b> 1/19/2016					<b>Date:</b> 1/19/2016					<b>Date:</b> 1/19/2016					<b>Date:</b> 1/19/2016				
<b>Test Engineer:</b> Lieu Nguyen					<b>Test Engineer:</b> Lieu Nguyen					<b>Test Engineer:</b> Lieu Nguyen					<b>Test Engineer:</b> Lieu Nguyen				
<b>Configuration:</b> EUT Only					<b>Configuration:</b> EUT Only					<b>Configuration:</b> EUT Only					<b>Configuration:</b> EUT Only				
<b>Location:</b> Chamber C					<b>Location:</b> Chamber C					<b>Location:</b> Chamber C					<b>Location:</b> Chamber C				
<b>Mode:</b> LTE_QPSK Band 2 Fundamentals, 5MHz Bandwidth					<b>Mode:</b> LTE_QPSK Band 2 Fundamentals, 5MHz Bandwidth					<b>Mode:</b> LTE_16QAM Band 2 Fundamentals, 5MHz Bandwidth					<b>Mode:</b> LTE_16QAM Band 2 Fundamentals, 5MHz Bandwidth				
<b>Test Equipment:</b> Receiving: Horn T119 and Chamber C SMA Cables Substitution: Horn T59 Substitution, 4ft SMA Cable Warehouse										<b>Test Equipment:</b> Receiving: Horn T119 and Chamber C SMA Cables Substitution: Horn T59 Substitution, 4ft SMA Cable Warehouse									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes		f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch										Low Ch									
1852.50	10.10	V	0.9	8.0	17.21	33.0	-15.8			1852.50	9.10	V	0.9	8.0	16.21	33.0	-16.8		
1852.50	17.24	H	0.9	8.0	24.39	33.0	-8.7			1852.50	16.10	H	0.9	8.0	23.21	33.0	-9.8		
Mid Ch										Mid Ch									
1880.00	8.99	V	0.9	8.0	16.10	33.0	-16.9			1880.00	8.20	V	0.9	8.0	15.31	33.0	-17.7		
1880.00	16.80	H	0.9	8.0	23.91	33.0	-9.1			1880.00	15.75	H	0.9	8.0	22.86	33.0	-10.1		
High Ch										High Ch									
1907.50	14.85	V	0.9	8.0	21.16	33.0	-11.8			1907.50	13.20	V	0.9	8.0	20.31	33.0	-12.7		
1907.50	16.24	H	0.9	8.0	23.59	33.0	-9.7			1907.50	17.15	H	0.9	8.0	24.26	33.0	-8.7		

10MHz QPSK										10MHz 16QAM									
High Frequency Substitution Measurement UL Verification Services, Inc.										High Frequency Substitution Measurement UL Verification Services, Inc.									
<b>Company:</b> LG Electronics					<b>Project #:</b> 16122653					<b>Company:</b> LG Electronics					<b>Project #:</b> 16122653				
<b>Date:</b> 1/19/2016					<b>Test Engineer:</b> Lieu Nguyen					<b>Date:</b> 1/19/2016					<b>Test Engineer:</b> Lieu Nguyen				
<b>Configuration:</b> EUT Only					<b>Location:</b> Chamber C					<b>Configuration:</b> EUT Only					<b>Location:</b> Chamber C				
<b>Mode:</b> LTE_QPSK Band 2 Fundamentals, 10MHz Bandwidth					<b>Mode:</b> LTE_16QAM Band 2 Fundamentals, 10MHz Bandwidth					<b>Mode:</b> LTE_QPSK Band 2 Fundamentals, 10MHz Bandwidth					<b>Mode:</b> LTE_16QAM Band 2 Fundamentals, 10MHz Bandwidth				
<b>Test Equipment:</b> Receiving: Horn T119 and Chamber C SMA Cables Substitution: Horn T99 Substitution, 4ft SMA Cable Warehouse										<b>Test Equipment:</b> Receiving: Horn T119 and Chamber C SMA Cables Substitution: Horn T99 Substitution, 4ft SMA Cable Warehouse									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes		f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch										Low Ch									
1855.00	11.37	V	0.9	8.0	18.48	33.0	-14.5			1855.00	10.52	V	0.9	8.0	17.63	33.0	-15.4		
1855.00	17.41	H	0.9	8.0	24.52	33.0	-8.5			1855.00	16.90	H	0.9	8.0	24.01	33.0	-9.0		
Mid Ch										Mid Ch									
1880.00	13.98	V	0.9	8.0	21.09	33.0	-11.9			1880.00	13.21	V	0.9	8.0	20.32	33.0	-12.7		
1880.00	17.49	H	0.9	8.0	24.60	33.0	-8.4			1880.00	16.62	H	0.9	8.0	23.73	33.0	-9.3		
High Ch										High Ch									
1905.00	11.50	V	0.9	8.0	18.61	33.0	-14.4			1905.00	10.70	V	0.9	8.0	17.81	33.0	-15.2		
1905.00	16.99	H	0.9	8.0	24.10	33.0	-8.9			1905.00	15.62	H	0.9	8.0	22.73	33.0	-10.3		
15MHz QPSK										15MHz 16QAM									
High Frequency Substitution Measurement UL Verification Services, Inc.										High Frequency Substitution Measurement UL Verification Services, Inc.									
<b>Company:</b> LG Electronics					<b>Project #:</b> 16122653					<b>Company:</b> LG Electronics					<b>Project #:</b> 16122653				
<b>Date:</b> 1/19/2016					<b>Test Engineer:</b> Lieu Nguyen					<b>Date:</b> 1/19/2016					<b>Test Engineer:</b> Lieu Nguyen				
<b>Configuration:</b> EUT Only					<b>Location:</b> Chamber C					<b>Configuration:</b> EUT Only					<b>Location:</b> Chamber C				
<b>Mode:</b> LTE_QPSK Band 2 Fundamentals, 15MHz Bandwidth					<b>Mode:</b> LTE_16QAM Band 2 Fundamentals, 15MHz Bandwidth					<b>Mode:</b> LTE_QPSK Band 2 Fundamentals, 15MHz Bandwidth					<b>Mode:</b> LTE_16QAM Band 2 Fundamentals, 15MHz Bandwidth				
<b>Test Equipment:</b> Receiving: Horn T119 and Chamber C SMA Cables Substitution: Horn T99 Substitution, 4ft SMA Cable Warehouse										<b>Test Equipment:</b> Receiving: Horn T119 and Chamber C SMA Cables Substitution: Horn T99 Substitution, 4ft SMA Cable Warehouse									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes		f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch										Low Ch									
1857.50	13.90	V	0.9	8.0	21.01	33.0	-12.0			1857.50	13.25	V	0.9	8.0	20.36	33.0	-12.6		
1857.50	15.85	H	0.9	8.0	22.96	33.0	-10.0			1857.50	14.95	H	0.9	8.0	22.06	33.0	-10.9		
Mid Ch										Mid Ch									
1880.00	4.34	V	0.9	8.0	11.45	33.0	-21.6			1880.00	3.81	V	0.9	8.0	10.92	33.0	-22.1		
1880.00	16.86	H	0.9	8.0	23.97	33.0	-9.0			1880.00	16.35	H	0.9	8.0	23.46	33.0	-9.5		
High Ch										High Ch									
1902.50	5.75	V	0.9	8.0	12.86	33.0	-20.1			1902.50	5.27	V	0.9	8.0	12.38	33.0	-20.6		
1902.50	16.10	H	0.9	8.0	23.21	33.0	-9.8			1902.50	15.50	H	0.9	8.0	22.61	33.0	-10.4		
20MHz QPSK										20MHz 16QAM									
High Frequency Substitution Measurement UL Verification Services, Inc.										High Frequency Substitution Measurement UL Verification Services, Inc.									
<b>Company:</b> LG Electronics					<b>Project #:</b> 16122653					<b>Company:</b> LG Electronics					<b>Project #:</b> 16122653				
<b>Date:</b> 1/20/2016					<b>Test Engineer:</b> Lieu Nguyen					<b>Date:</b> 1/20/2016					<b>Test Engineer:</b> Lieu Nguyen				
<b>Configuration:</b> EUT Only					<b>Location:</b> Chamber C					<b>Configuration:</b> EUT Only					<b>Location:</b> Chamber C				
<b>Mode:</b> LTE_QPSK Band 2 Fundamentals, 20MHz Bandwidth					<b>Mode:</b> LTE_16QAM Band 2 Fundamentals, 20MHz Bandwidth					<b>Mode:</b> LTE_QPSK Band 2 Fundamentals, 20MHz Bandwidth					<b>Mode:</b> LTE_16QAM Band 2 Fundamentals, 20MHz Bandwidth				
<b>Test Equipment:</b> Receiving: Horn T119 and Chamber C SMA Cables Substitution: Horn T99 Substitution, 4ft SMA Cable Warehouse										<b>Test Equipment:</b> Receiving: Horn T119 and Chamber C SMA Cables Substitution: Horn T99 Substitution, 4ft SMA Cable Warehouse									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes		f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch										Low Ch									
1860.00	13.68	V	0.9	8.0	20.79	33.0	-12.2			1860.00	11.05	V	0.9	8.0	18.96	33.0	-14.0		
1860.00	15.46	H	0.9	8.0	22.57	33.0	-10.4			1860.00	14.25	H	0.9	8.0	21.36	33.0	-11.6		
Mid Ch										Mid Ch									
1880.00	12.22	V	0.9	8.0	19.33	33.0	-13.7			1880.00	12.90	V	0.9	8.0	20.01	33.0	-13.0		
1880.00	16.00	H	0.9	8.0	23.11	33.0	-9.9			1880.00	14.92	H	0.9	8.0	22.03	33.0	-11.0		
High Ch										High Ch									
1900.00	11.97	V	0.9	8.0	19.08	33.0	-13.9			1900.00	11.25	V	0.9	8.0	18.36	33.0	-14.6		
1900.00	16.65	H	0.9	8.0	23.76	33.0	-9.2			1900.00	16.05	H	0.9	8.0	23.16	33.0	-9.8		

**LTE Band 4**

BW (MHz)	Mode	RB/RB Size	f(MHz)	EIRP	
				dBm	mW
1.4	QPSK	1/0	1710.7	23.25	211.35
		1/0	1732.5	23.81	240.44
		1/0	1754.3	23.34	215.77
	16QAM	1/0	1710.7	22.73	187.50
		1/0	1732.5	23.52	224.91
		1/0	1754.3	22.93	196.34
3	QPSK	1/0	1711.5	23.57	227.51
		1/0	1732.5	23.95	248.31
		1/0	1753.5	23.69	233.88
	16QAM	1/0	1711.5	22.92	195.88
		1/0	1732.5	23.62	230.14
		1/0	1753.5	23.02	200.45
5	QPSK	1/0	1712.5	23.22	209.89
		1/0	1732.5	23.39	218.27
		1/0	1752.5	23.68	233.35
	16QAM	1/0	1712.5	22.99	199.07
		1/0	1732.5	23.02	200.45
		1/0	1752.5	23.32	214.78
10	QPSK	1/0	1715	23.55	226.46
		1/0	1732.5	24.17	261.22
		1/0	1750	23.91	246.04
	16QAM	1/0	1715	23.12	205.12
		1/0	1732.5	23.52	224.91
		1/0	1750	23.44	220.80
15	QPSK	1/0	1717.5	23.53	225.42
		1/0	1732.5	23.79	239.33
		1/0	1747.5	23.92	246.60
	16QAM	1/0	1717.5	23.18	207.97
		1/0	1732.5	23.32	214.78
		1/0	1747.5	23.43	220.29
20	QPSK	1/0	1720	23.97	249.46
		1/0	1732.5	23.84	242.10
		1/0	1745	23.80	239.88
	16QAM	1/0	1720	23.56	226.99
		1/0	1732.5	23.50	223.87
		1/0	1745	23.16	207.01

1.4MHz QPSK									1.4MHz 16QAM											
High Frequency Substitution Measurement UL Verification Services, Inc.									High Frequency Substitution Measurement UL Verification Services, Inc.											
<b>Company:</b> LG Electronics			<b>Project #:</b> 16122653			<b>Date:</b> 1/20/2016			<b>Test Engineer:</b> Lieu Nguyen			<b>Configuration:</b> EUT Only (X-Position)			<b>Location:</b> Chamber C			<b>Mode:</b> LTE_QPSK Band 4 Fundamentals, 1.4MHz Bandwidth		
<b>Test Equipment:</b>			Receiving: Horn T119, and Chamber C SMA Cables			Substitution: Horn T59, 4ft SMA Cable Warehouse			<b>Test Equipment:</b>			Receiving: Horn T119, and Chamber C SMA Cables			Substitution: Horn T59, 4ft SMA Cable Warehouse					
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes			
Low Ch									Low Ch											
1710.70	11.80	V	0.9	8.2	19.07	30.0	-10.5		1710.70	11.95	V	0.9	8.2	19.22	30.0	-10.8				
1710.70	15.98	H	0.9	8.2	23.25	30.0	-6.7		1710.70	15.46	H	0.9	8.2	22.73	30.0	-7.3				
Mid Ch									Mid Ch											
1732.50	13.65	V	0.9	8.2	20.92	30.0	-9.1		1732.50	13.22	V	0.9	8.2	20.49	30.0	-9.5				
1732.50	16.54	H	0.9	8.2	23.81	30.0	-6.2		1732.50	16.25	H	0.9	8.2	23.52	30.0	-6.5				
High Ch									High Ch											
1754.30	12.08	V	0.9	8.1	19.27	30.0	-10.7		1754.30	11.62	V	0.9	8.1	18.81	30.0	-11.2				
1754.30	16.15	H	0.9	8.1	23.34	30.0	-6.7		1754.30	15.74	H	0.9	8.1	22.93	30.0	-7.1				
3MHz QPSK									3MHz 16QAM											
High Frequency Substitution Measurement UL Verification Services, Inc.									High Frequency Substitution Measurement UL Verification Services, Inc.											
<b>Company:</b> LG Electronics			<b>Project #:</b> 16122653			<b>Date:</b> 1/20/2016			<b>Test Engineer:</b> Lieu Nguyen			<b>Configuration:</b> EUT Only			<b>Location:</b> Chamber C			<b>Mode:</b> LTE_QPSK Band 4 Fundamentals, 3MHz Bandwidth		
<b>Test Equipment:</b>			Receiving: Horn T119, and Chamber C SMA Cables			Substitution: Horn T59, 4ft SMA Cable Warehouse			<b>Test Equipment:</b>			Receiving: Horn T119, and Chamber C SMA Cables			Substitution: Horn T59, 4ft SMA Cable Warehouse					
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes			
Low Ch									Low Ch											
1711.50	12.35	V	0.9	8.2	19.70	30.0	-10.3		1711.50	11.67	V	0.9	8.2	19.02	30.0	-11.0				
1711.50	16.22	H	0.9	8.2	23.57	30.0	-6.4		1711.50	15.57	H	0.9	8.2	22.92	30.0	-7.1				
Mid Ch									Mid Ch											
1732.50	13.77	V	0.9	8.2	21.04	30.0	-9.0		1732.50	13.02	V	0.9	8.2	20.29	30.0	-9.7				
1732.50	16.68	H	0.9	8.2	23.95	30.0	-6.0		1732.50	16.35	H	0.9	8.2	23.62	30.0	-6.4				
High Ch									High Ch											
1753.50	13.45	V	0.9	8.1	20.64	30.0	-9.4		1753.50	12.65	V	0.9	8.1	19.84	30.0	-10.2				
1753.50	16.90	H	0.9	8.1	23.69	30.0	-6.3		1753.50	15.83	H	0.9	8.1	23.02	30.0	-7.0				
5MHz QPSK									5MHz 16QAM											
High Frequency Substitution Measurement UL Verification Services, Inc.									High Frequency Substitution Measurement UL Verification Services, Inc.											
<b>Company:</b> LG Electronics			<b>Project #:</b> 16122653			<b>Date:</b> 1/20/2016			<b>Test Engineer:</b> Lieu Nguyen			<b>Configuration:</b> EUT Only			<b>Location:</b> Chamber C			<b>Mode:</b> LTE_QPSK Band 4 Fundamentals, 5MHz Bandwidth		
<b>Test Equipment:</b>			Receiving: Horn T119, and Chamber C SMA Cables			Substitution: Horn T59, 4ft SMA Cable Warehouse			<b>Test Equipment:</b>			Receiving: Horn T119, and Chamber C SMA Cables			Substitution: Horn T59, 4ft SMA Cable Warehouse					
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes			
Low Ch									Low Ch											
1712.50	12.02	V	0.9	8.2	19.36	30.0	-10.6		1712.50	10.75	V	0.9	8.2	18.09	30.0	-11.9				
1712.50	15.88	H	0.9	8.2	23.22	30.0	-6.8		1712.50	15.65	H	0.9	8.2	22.99	30.0	-7.0				
Mid Ch									Mid Ch											
1732.50	13.38	V	0.9	8.2	20.65	30.0	-9.3		1732.50	12.75	V	0.9	8.2	20.02	30.0	-10.0				
1732.50	16.12	H	0.9	8.2	23.39	30.0	-6.6		1732.50	15.75	H	0.9	8.2	23.02	30.0	-7.0				
High Ch									High Ch											
1752.50	13.77	V	0.9	8.1	20.97	30.0	-9.0		1752.50	12.55	V	0.9	8.1	19.75	30.0	-10.3				
1752.50	16.48	H	0.9	8.1	23.68	30.0	-6.3		1752.50	16.12	H	0.9	8.1	23.32	30.0	-6.7				

10MHz QPSK									10MHz 16QAM											
High Frequency Substitution Measurement UL Verification Services, Inc.									High Frequency Substitution Measurement UL Verification Services, Inc.											
Company: LG Electronics			Project #: 16I22653			Date: 1/20/2016			Test Engineer: Lieu Nguyen			Configuration: EUT Only			Location: Chamber C			Mode: LTE_QPSK Band 4 Fundamentals, 10MHz Bandwidth		
Company: LG Electronics			Project #: 16I22653			Date: 1/20/2016			Test Engineer: Lieu Nguyen			Configuration: EUT Only			Location: Chamber C			Mode: LTE_16QAM Band 4 Fundamentals, 10MHz Bandwidth		
<b>Test Equipment:</b> Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T59, 4ft SMA Cable Warehouse									<b>Test Equipment:</b> Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T59, 4ft SMA Cable Warehouse											
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes			
Low Ch									Low Ch											
1715.00	11.96	V	0.9	8.2	19.23	30.0	-10.8		1715.00	11.78	V	0.9	8.2	19.05	30.0	-10.9				
1715.00	16.28	H	0.9	8.2	23.55	30.0	-6.4		1715.00	15.85	H	0.9	8.2	23.12	30.0	-6.9				
Mid Ch									Mid Ch											
1732.50	13.96	V	0.9	8.2	20.83	30.0	-9.2		1732.50	13.13	V	0.9	8.2	20.40	30.0	-9.6				
1732.50	16.90	H	0.9	8.2	24.17	30.0	-5.8		1732.50	16.25	H	0.9	8.2	23.52	30.0	-6.5				
High Ch									High Ch											
1750.00	13.85	V	0.9	8.1	21.04	30.0	-9.0		1750.00	12.52	V	0.9	8.1	19.71	30.0	-10.3				
1750.00	16.72	H	0.9	8.1	23.91	30.0	-6.1		1750.00	16.25	H	0.9	8.1	23.44	30.0	-6.6				
15MHz QPSK									15MHz 16QAM											
High Frequency Substitution Measurement UL Verification Services, Inc.									High Frequency Substitution Measurement UL Verification Services, Inc.											
Company: LG Electronics			Project #: 16I22653			Date: 1/20/2016			Test Engineer: Lieu Nguyen			Configuration: EUT Only			Location: Chamber C			Mode: LTE_QPSK Band 4 Fundamentals, 15MHz Bandwidth		
Company: LG Electronics			Project #: 16I22653			Date: 1/20/2016			Test Engineer: Lieu Nguyen			Configuration: EUT Only			Location: Chamber C			Mode: LTE_16QAM Band 4 Fundamentals, 15MHz Bandwidth		
<b>Test Equipment:</b> Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T59, 4ft SMA Cable Warehouse									<b>Test Equipment:</b> Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T59, 4ft SMA Cable Warehouse											
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes			
Low Ch									Low Ch											
1717.50	11.91	V	0.9	8.2	19.26	30.0	-10.7		1717.50	11.36	V	0.9	8.2	18.71	30.0	-11.3				
1717.50	16.18	H	0.9	8.2	23.53	30.0	-6.5		1717.50	15.81	H	0.9	8.2	23.18	30.0	-6.8				
Mid Ch									Mid Ch											
1732.50	13.73	V	0.9	8.2	21.00	30.0	-9.0		1732.50	13.25	V	0.9	8.2	20.52	30.0	-9.5				
1732.50	16.52	H	0.9	8.2	23.79	30.0	-6.2		1732.50	16.05	H	0.9	8.2	23.32	30.0	-6.7				
High Ch									High Ch											
1747.50	14.14	V	0.9	8.1	21.33	30.0	-8.7		1747.50	13.78	V	0.9	8.1	20.47	30.0	-9.5				
1747.50	16.73	H	0.9	8.1	23.92	30.0	-6.1		1747.50	16.24	H	0.9	8.1	23.43	30.0	-6.6				
20MHz QPSK									20MHz 16QAM											
High Frequency Substitution Measurement UL Verification Services, Inc.									High Frequency Substitution Measurement UL Verification Services, Inc.											
Company: LG Electronics			Project #: 16I22653			Date: 1/20/2016			Test Engineer: Lieu Nguyen			Configuration: EUT Only			Location: Chamber C			Mode: LTE_QPSK Band 4 Fundamentals, 20MHz Bandwidth		
Company: LG Electronics			Project #: 16I22653			Date: 1/20/2016			Test Engineer: Lieu Nguyen			Configuration: EUT Only			Location: Chamber C			Mode: LTE_16QAM Band 4 Fundamentals, 20MHz Bandwidth		
<b>Test Equipment:</b> Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T59, 4ft SMA Cable Warehouse									<b>Test Equipment:</b> Receiving: Horn T119, and Chamber C SMA Cables Substitution: Horn T59, 4ft SMA Cable Warehouse											
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes			
Low Ch									Low Ch											
1720.00	12.75	V	0.9	8.2	20.09	30.0	-9.9		1720.00	12.58	V	0.9	8.2	19.92	30.0	-10.1				
1720.00	16.63	H	0.9	8.2	23.97	30.0	-6.0		1720.00	16.22	H	0.9	8.2	23.56	30.0	-6.4				
Mid Ch									Mid Ch											
1732.50	13.67	V	0.9	8.2	20.94	30.0	-9.1		1732.50	12.84	V	0.9	8.2	20.11	30.0	-9.9				
1732.50	16.57	H	0.9	8.2	23.84	30.0	-6.2		1732.50	16.23	H	0.9	8.2	23.50	30.0	-6.5				
High Ch									High Ch											
1745.00	13.20	V	0.9	8.1	20.40	30.0	-9.6		1745.00	12.78	V	0.9	8.1	19.98	30.0	-10.0				
1745.00	16.60	H	0.9	8.1	23.80	30.0	-6.2		1745.00	15.96	H	0.9	8.1	23.16	30.0	-6.8				

**LTE Band 13**

BW (MHz)	Mode	RB/RB Size	f(MHz)	EIRP	
				dBm	mW
5	QPSK	1/0	779.5	21.31	135.21
		1/0	782	21.86	153.46
		1/0	784.5	21.43	139.00
	16QAM	1/0	779.5	20.77	119.40
		1/0	782	21.24	133.05
		1/0	784.5	21.10	128.82
10	QPSK				
		1/0	782.00	22.04	159.96
	16QAM				
		1/0	782.00	21.49	140.93

5MHz QPSK										5MHz 16QAM									
<b>High Frequency Substitution Measurement</b> UL Verification Services, Inc.										<b>High Frequency Substitution Measurement</b> UL Verification Services, Inc.									
<b>Company:</b> LG Electronics <b>Project #:</b> 16122653 <b>Date:</b> 1/21/2016 <b>Test Engineer:</b> Liew Nguyen <b>Configuration:</b> EUT Only <b>Location:</b> Chamber C <b>Mode:</b> LTE_QPSK Band 13 Fundamentals, 5MHz Bandwidth										<b>Company:</b> LG Electronics <b>Project #:</b> 16122653 <b>Date:</b> 1/21/2016 <b>Test Engineer:</b> Liew Nguyen <b>Configuration:</b> EUT Only <b>Location:</b> Chamber C <b>Mode:</b> LTE_16QAM Band 13 Fundamentals, 5MHz Bandwidth									
<b>Test Equipment:</b> Receiving: Dipole T185, and Chamber C SMA Cables Substitution: Horn T416 Substitution, 4ft SMA Cable Warehouse										<b>Test Equipment:</b> Receiving: Dipole T185, and Chamber C SMA Cables Substitution: Horn T416 Substitution, 4ft SMA Cable Warehouse									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes		f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch 779.50 14.77 V 0.9 0.0 13.87 34.8 -20.9 779.50 22.21 H 0.9 0.0 21.31 34.8 -13.5 Mid Ch 782.00 15.24 V 0.9 0.0 14.34 34.8 -20.4 782.00 22.76 H 0.9 0.0 21.86 34.8 -12.9 High Ch 784.50 14.53 V 0.9 0.0 13.63 34.8 -21.1 784.50 22.33 H 0.9 0.0 21.43 34.8 -13.3										Low Ch 779.50 14.50 V 0.9 0.0 13.60 34.8 -21.2 779.50 21.67 H 0.9 0.0 20.77 34.8 -14.0 Mid Ch 782.00 14.67 V 0.9 0.0 13.77 34.8 -21.0 782.00 22.14 H 0.9 0.0 21.24 34.8 -13.5 High Ch 784.50 14.03 V 0.9 0.0 13.13 34.8 -21.6 784.50 22.00 H 0.9 0.0 21.10 34.8 -13.7									
10MHz QPSK										10MHz 16QAM									
<b>High Frequency Substitution Measurement</b> UL Verification Services, Inc.										<b>High Frequency Substitution Measurement</b> UL Verification Services, Inc.									
<b>Company:</b> LG Electronics <b>Project #:</b> 16122653 <b>Date:</b> 1/21/2016 <b>Test Engineer:</b> Liew Nguyen <b>Configuration:</b> EUT Only <b>Location:</b> Chamber C <b>Mode:</b> LTE_QPSK Band 13 Fundamentals, 10MHz Bandwidth										<b>Company:</b> LG Electronics <b>Project #:</b> 16122653 <b>Date:</b> 1/21/2016 <b>Test Engineer:</b> Liew Nguyen <b>Configuration:</b> EUT Only <b>Location:</b> Chamber C <b>Mode:</b> LTE_16QAM Band 13 Fundamentals, 10MHz Bandwidth									
<b>Test Equipment:</b> Receiving: Dipole T185, and Chamber C SMA Cables Substitution: Horn T416 Substitution, 4ft SMA Cable Warehouse										<b>Test Equipment:</b> Receiving: Dipole T185, and Chamber C SMA Cables Substitution: Horn T416 Substitution, 4ft SMA Cable Warehouse									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes		f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Mid Ch 782.00 15.00 V 0.9 0.0 14.10 34.8 -20.7 782.00 22.94 H 0.9 0.0 22.04 34.8 -12.7										Mid Ch 782.00 14.54 V 0.9 0.0 13.64 34.8 -21.1 782.00 22.39 H 0.9 0.0 21.49 34.8 -13.3									

---

## 9.2. FIELD STRENGTH OF SPURIOUS RADIATION

### RULE PART(S)

FCC: §2.1053, §22.917, §24.238, §27.53

### LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

### TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

9.2.1. SPURIOUS EMISSION TEST DATA

CDMA

BC0 1xRTT											BC0 EVDO Rel.0										
UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement											UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: LG Electronics Project #: 16122653 Date: 1/23/2016 Test Engineer: Lisa Nguyen Configuration: EUT with AC Adapter (Z Position) Location: Chamber C Mode: CDMA 1xRTT BC0 Harmonics											Company: LG Electronics Project #: 16122653 Date: 1/22/2016 Test Engineer: Lisa Nguyen Configuration: EUT with AC Adapter Location: Chamber C Mode: CDMA EVDO BC0 Harmonics										
F	SG reading	Ant. Pol.	Distance	Preamp	Filter	EIRP	Limit	Delta	Notes		F	SG reading	Ant. Pol.	Distance	Preamp	Filter	EIRP	Limit	Delta	Notes	
MHz	(dBm)	(dBi)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)			MHz	(dBm)	(dBi)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)		
Low Ch. 824.7											Low Ch. 824.7										
1649.80	-26.5	V	3.0	37.4	1.0	52.9	-13.0	-49.9			1649.40	-24.9	V	3.0	37.4	1.0	50.3	-13.0	-45.3		
2474.10	-23.3	V	3.0	36.4	1.0	50.7	-13.0	-46.7			2474.10	-20.1	V	3.0	36.4	1.0	55.7	-13.0	-42.7		
3296.00	-20.5	V	3.0	35.8	1.0	50.3	-13.0	-42.3			3296.00	-18.5	V	3.0	35.8	1.0	53.3	-13.0	-40.3		
1649.80	-28.2	H	3.0	37.4	1.0	64.6	-13.0	-51.6			1649.40	-20.9	H	3.0	37.4	1.0	57.3	-13.0	-44.3		
2474.10	-20.4	H	3.0	36.4	1.0	50.8	-13.0	-42.8			2474.10	-17.7	H	3.0	36.4	1.0	52.1	-13.0	-40.1		
3296.00	-21.0	H	3.0	35.8	1.0	50.8	-13.0	-42.8			3296.00	-16.1	H	3.0	35.8	1.0	56.9	-13.0	-37.9		
Mid Ch. 836.52											Mid Ch. 836.52										
1673.04	-23.3	V	3.0	37.3	1.0	51.6	-13.0	-48.6			1673.04	-21.4	V	3.0	37.3	1.0	57.7	-13.0	-44.7		
2509.56	-23.4	V	3.0	36.4	1.0	50.8	-13.0	-45.8			2509.56	-20.1	V	3.0	36.4	1.0	55.5	-13.0	-42.5		
3346.00	-20.6	V	3.0	35.8	1.0	50.4	-13.0	-42.4			3346.00	-17.3	V	3.0	35.8	1.0	52.1	-13.0	-39.1		
1673.04	-27.3	H	3.0	37.3	1.0	63.6	-13.0	-50.6			1673.04	-23.3	H	3.0	37.3	1.0	57.6	-13.0	-44.6		
2509.56	-21.1	H	3.0	36.4	1.0	56.5	-13.0	-43.5			2509.56	-17.1	H	3.0	36.4	1.0	52.5	-13.0	-39.5		
3346.00	-21.0	H	3.0	35.8	1.0	50.3	-13.0	-43.3			3346.00	-16.9	H	3.0	35.8	1.0	50.8	-13.0	-37.8		
High Ch. 848.31											High Ch. 848.31										
1696.82	-25.8	V	3.0	37.3	1.0	62.1	-13.0	-49.1			1696.82	-20.7	V	3.0	37.3	1.0	57.0	-13.0	-44.0		
2544.93	-23.8	V	3.0	36.3	1.0	50.1	-13.0	-46.1			2544.93	-19.2	V	3.0	36.3	1.0	54.5	-13.0	-41.5		
3383.24	-21.2	V	3.0	35.7	1.0	55.9	-13.0	-42.9			3383.24	-17.4	V	3.0	35.7	1.0	52.1	-13.0	-39.1		
1696.82	-27.0	H	3.0	37.3	1.0	63.3	-13.0	-50.3			1696.82	-20.5	H	3.0	37.3	1.0	56.8	-13.0	-43.8		
2544.93	-21.3	H	3.0	36.3	1.0	56.6	-13.0	-43.6			2544.93	-18.4	H	3.0	36.3	1.0	53.7	-13.0	-40.7		
3383.24	-21.2	H	3.0	35.7	1.0	55.9	-13.0	-42.9			3383.24	-16.5	H	3.0	35.7	1.0	51.2	-13.0	-38.2		
BC1 1xRTT											BC1 EVDO Rel.0										
UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement											UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: LG Electronics Project #: 16122653 Date: 1/23/2016 Test Engineer: Lisa Nguyen Configuration: EUT with AC Adapter Location: Chamber C Mode: CDMA 1xRTT BC1 Harmonics											Company: LG Electronics Project #: 16122653 Date: 1/22/2016 Test Engineer: Lisa Nguyen Configuration: EUT with AC Adapter (X Position) Location: Chamber C Mode: CDMA EVDO BC1 Harmonics										
F	SG reading	Ant. Pol.	Distance	Preamp	Filter	EIRP	Limit	Delta	Notes		F	SG reading	Ant. Pol.	Distance	Preamp	Filter	EIRP	Limit	Delta	Notes	
MHz	(dBm)	(dBi)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)			MHz	(dBm)	(dBi)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)		
Low Ch. 1851.25											Low Ch. 1851.25										
3702.50	-18.0	V	3.0	35.0	1.0	52.9	-13.0	-39.9			3702.50	-14.5	V	3.0	35.0	1.0	46.3	-13.0	-33.3		
5553.75	-13.9	V	3.0	35.5	1.0	48.0	-13.0	-35.0			5553.75	-7.0	V	3.0	35.5	1.0	42.0	-13.0	-29.0		
7405.00	-12.0	V	3.0	35.7	1.0	46.7	-13.0	-33.7			7405.00	-3.2	V	3.0	35.7	1.0	37.9	-13.0	-24.9		
3702.50	-18.8	H	3.0	35.0	1.0	53.5	-13.0	-40.5			3702.50	-8.3	H	3.0	35.9	1.0	43.4	-13.0	-30.4		
5553.75	-12.7	H	3.0	35.5	1.0	47.1	-13.0	-34.1			5553.75	-6.2	H	3.0	35.5	1.0	39.6	-13.0	-26.6		
7405.00	-11.9	H	3.0	35.7	1.0	46.1	-13.0	-33.1			7405.00	-1.3	H	3.0	35.7	1.0	36.0	-13.0	-23.0		
Mid Ch. 1880											Mid Ch. 1880										
3760.00	-17.3	V	3.0	35.8	1.0	52.1	-13.0	-39.1			3760.00	-12.2	V	3.0	35.8	1.0	46.0	-13.0	-33.0		
5640.00	-14.9	V	3.0	35.5	1.0	48.0	-13.0	-35.0			5640.00	-7.4	V	3.0	35.5	1.0	41.9	-13.0	-28.9		
7520.00	-11.4	V	3.0	35.7	1.0	46.1	-13.0	-33.1			7520.00	-3.6	V	3.0	35.7	1.0	38.4	-13.0	-25.4		
3760.00	-18.7	H	3.0	35.8	1.0	53.5	-13.0	-40.5			3760.00	-8.3	H	3.0	35.8	1.0	43.4	-13.0	-30.4		
5640.00	-13.7	H	3.0	35.5	1.0	48.1	-13.0	-35.1			5640.00	-5.8	H	3.0	35.5	1.0	40.3	-13.0	-27.3		
7520.00	-11.1	H	3.0	35.7	1.0	45.9	-13.0	-32.9			7520.00	-2.7	H	3.0	35.7	1.0	36.9	-13.0	-23.9		
High Ch. 1908.75											High Ch. 1908.75										
3876.50	-18.0	V	3.0	35.8	1.0	52.7	-13.0	-39.7			3876.50	-10.9	V	3.0	35.8	1.0	45.7	-13.0	-32.7		
5828.25	-15.1	V	3.0	35.5	1.0	49.6	-13.0	-36.6			5828.25	-6.0	V	3.0	35.5	1.0	40.5	-13.0	-27.5		
7876.00	-13.7	V	3.0	35.8	1.0	48.5	-13.0	-35.5			7876.00	-3.4	V	3.0	35.8	1.0	38.1	-13.0	-25.1		
3876.50	-19.2	H	3.0	35.8	1.0	54.0	-13.0	-41.0			3876.50	-8.3	H	3.0	35.8	1.0	43.0	-13.0	-30.0		
5828.25	-13.8	H	3.0	35.5	1.0	48.3	-13.0	-35.3			5828.25	-5.1	H	3.0	35.5	1.0	39.6	-13.0	-26.6		
7876.00	-11.9	H	3.0	35.8	1.0	46.5	-13.0	-33.5			7876.00	-1.5	H	3.0	35.8	1.0	36.3	-13.0	-23.3		

**LTE Band 2**

**1.4MHz QPSK**  
 UL Verification Services, Inc.  
 Above 1GHz High Frequency Substitution Measurement

**Company:** LG Electronics  
**Project #:** 16122653  
**Date:** 1/21/2016  
**Test Engineer:** Lieu Nguyen  
**Configuration:** EUT with AC Adapter (X-Position)  
**Location:** Chamber C  
**Mode:** LTE\_QPSK Band 2 Harmonics, 1.4MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (HV)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Ch, 1850.7</b>									
3701.40	-18.9	V	3.0	35.9	1.0	-53.8	-13.0	-40.8	
5552.10	-16.7	V	3.0	35.5	1.0	-51.2	-13.0	-38.2	
7402.80	-14.0	V	3.0	35.7	1.0	-48.7	-13.0	-35.7	
3701.40	-18.6	H	3.0	35.9	1.0	-54.4	-13.0	-41.4	
5552.10	-14.0	H	3.0	35.5	1.0	-48.4	-13.0	-35.4	
7402.80	-14.0	H	3.0	35.7	1.0	-48.7	-13.0	-35.7	
<b>Mid Ch, 1880</b>									
3760.00	-19.2	V	3.0	35.8	1.0	-54.0	-13.0	-41.0	
5640.00	-15.5	V	3.0	35.5	1.0	-50.0	-13.0	-37.0	
7520.00	-14.9	V	3.0	35.7	1.0	-49.6	-13.0	-36.6	
3760.00	-19.1	H	3.0	35.9	1.0	-53.9	-13.0	-40.9	
5640.00	-16.4	H	3.0	35.5	1.0	-50.8	-13.0	-37.8	
7520.00	-13.5	H	3.0	35.7	1.0	-48.3	-13.0	-35.3	
<b>High Ch, 1909.3</b>									
3818.60	-17.8	V	3.0	35.8	1.0	-52.6	-13.0	-39.6	
5727.90	-15.6	V	3.0	35.5	1.0	-50.1	-13.0	-37.1	
7637.20	-14.4	V	3.0	35.8	1.0	-49.1	-13.0	-36.1	
3818.60	-17.4	H	3.0	35.8	1.0	-52.2	-13.0	-39.2	
5727.90	-15.0	H	3.0	35.5	1.0	-49.9	-13.0	-36.5	
7637.20	-12.9	H	3.0	35.8	1.0	-47.7	-13.0	-34.7	

**1.4MHz 16QAM**  
 UL Verification Services, Inc.  
 Above 1GHz High Frequency Substitution Measurement

**Company:** LG Electronics  
**Project #:** 16122653  
**Date:** 1/21/2016  
**Test Engineer:** Lieu Nguyen  
**Configuration:** EUT with AC Adapter (X-Position)  
**Location:** Chamber C  
**Mode:** LTE\_16QAM Band 2 Harmonics, 1.4MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (HV)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Ch, 1850.7</b>									
3701.40	-19.3	V	3.0	35.9	1.0	-54.2	-13.0	-41.2	
5552.10	-15.9	V	3.0	35.5	1.0	-50.4	-13.0	-37.4	
7402.80	-14.7	V	3.0	35.7	1.0	-49.4	-13.0	-36.4	
3701.40	-18.5	H	3.0	35.9	1.0	-53.3	-13.0	-40.3	
5552.10	-12.8	H	3.0	35.5	1.0	-47.3	-13.0	-34.3	
7402.80	-14.0	H	3.0	35.7	1.0	-48.7	-13.0	-35.7	
<b>Mid Ch, 1880</b>									
3760.00	-19.0	V	3.0	35.8	1.0	-53.8	-13.0	-40.8	
5640.00	-16.4	V	3.0	35.5	1.0	-50.9	-13.0	-37.9	
7520.00	-14.8	V	3.0	35.7	1.0	-49.5	-13.0	-36.5	
3760.00	-18.7	H	3.0	35.8	1.0	-53.5	-13.0	-40.5	
5640.00	-13.5	H	3.0	35.5	1.0	-48.0	-13.0	-35.0	
7520.00	-13.8	H	3.0	35.7	1.0	-48.5	-13.0	-35.5	
<b>High Ch, 1909.3</b>									
3818.60	-19.3	V	3.0	35.8	1.0	-54.1	-13.0	-41.1	
5727.90	-15.7	V	3.0	35.5	1.0	-50.2	-13.0	-37.2	
7637.20	-14.7	V	3.0	35.8	1.0	-49.4	-13.0	-36.4	
3818.60	-18.8	H	3.0	35.8	1.0	-53.5	-13.0	-40.5	
5727.90	-15.2	H	3.0	35.5	1.0	-49.7	-13.0	-36.7	
7637.20	-13.7	H	3.0	35.8	1.0	-48.4	-13.0	-35.4	

**3MHz QPSK**  
 UL Verification Services, Inc.  
 Above 1GHz High Frequency Substitution Measurement

**Company:** LG Electronics  
**Project #:** 16122653  
**Date:** 1/21/2016  
**Test Engineer:** Lieu Nguyen  
**Configuration:** EUT with AC Adapter (X-Position)  
**Location:** Chamber C  
**Mode:** LTE\_QPSK Band 2 Harmonics, 3MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (HV)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Ch, 1851.5</b>									
3703.00	-16.9	V	3.0	35.9	1.0	-51.8	-13.0	-38.8	
5554.50	-16.0	V	3.0	35.5	1.0	-50.4	-13.0	-37.4	
7406.00	-10.3	V	3.0	35.7	1.0	-45.0	-13.0	-32.0	
3703.00	-16.5	H	3.0	35.9	1.0	-51.4	-13.0	-38.4	
5554.50	-14.5	H	3.0	35.5	1.0	-48.0	-13.0	-35.0	
7406.00	-9.8	H	3.0	35.7	1.0	-44.5	-13.0	-31.5	
<b>Mid Ch, 1880</b>									
3760.00	-18.0	V	3.0	35.8	1.0	-52.8	-13.0	-39.8	
5640.00	-16.7	V	3.0	35.5	1.0	-51.2	-13.0	-38.2	
7520.00	-9.6	V	3.0	35.7	1.0	-44.3	-13.0	-31.3	
3760.00	-16.6	H	3.0	35.8	1.0	-51.4	-13.0	-38.4	
5640.00	-17.0	H	3.0	35.5	1.0	-51.5	-13.0	-38.5	
7520.00	-8.2	H	3.0	35.7	1.0	-43.0	-13.0	-30.0	
<b>High Ch, 1908.5</b>									
3817.00	-17.2	V	3.0	35.8	1.0	-52.0	-13.0	-39.0	
5725.50	-16.9	V	3.0	35.5	1.0	-51.4	-13.0	-38.4	
7634.00	-10.1	V	3.0	35.8	1.0	-44.8	-13.0	-31.8	
3817.00	-17.4	H	3.0	35.8	1.0	-52.2	-13.0	-39.2	
5725.50	-11.7	H	3.0	35.5	1.0	-46.2	-13.0	-33.2	
7634.00	-12.9	H	3.0	35.8	1.0	-47.6	-13.0	-34.6	

**3MHz 16QAM**  
 UL Verification Services, Inc.  
 Above 1GHz High Frequency Substitution Measurement

**Company:** LG Electronics  
**Project #:** 16122653  
**Date:** 1/21/2016  
**Test Engineer:** Lieu Nguyen  
**Configuration:** EUT with AC Adapter (X-Position)  
**Location:** Chamber C  
**Mode:** LTE\_16QAM Band 2 Harmonics, 3MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (HV)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Ch, 1851.5</b>									
3703.00	-17.4	V	3.0	35.9	1.0	-52.2	-13.0	-39.2	
5554.50	-16.5	V	3.0	35.5	1.0	-51.0	-13.0	-38.0	
7406.00	-10.3	V	3.0	35.7	1.0	-45.1	-13.0	-32.1	
3703.00	-16.3	H	3.0	35.9	1.0	-51.1	-13.0	-38.1	
5554.50	-15.2	H	3.0	35.5	1.0	-49.7	-13.0	-36.7	
7406.00	-9.3	H	3.0	35.7	1.0	-44.0	-13.0	-31.0	
<b>Mid Ch, 1880</b>									
3760.00	-18.2	V	3.0	35.8	1.0	-53.0	-13.0	-40.0	
5640.00	-17.5	V	3.0	35.5	1.0	-51.9	-13.0	-38.9	
7520.00	-10.3	V	3.0	35.7	1.0	-45.0	-13.0	-32.0	
3760.00	-17.1	H	3.0	35.8	1.0	-51.9	-13.0	-38.9	
5640.00	-17.3	H	3.0	35.5	1.0	-51.8	-13.0	-38.8	
7520.00	-8.0	H	3.0	35.7	1.0	-42.7	-13.0	-29.7	
<b>High Ch, 1908.5</b>									
3817.00	-16.9	V	3.0	35.8	1.0	-51.6	-13.0	-38.6	
5725.50	-16.7	V	3.0	35.5	1.0	-51.2	-13.0	-38.2	
7634.00	-9.7	V	3.0	35.8	1.0	-44.5	-13.0	-31.5	
3817.00	-17.3	H	3.0	35.8	1.0	-52.1	-13.0	-39.1	
5725.50	-11.4	H	3.0	35.5	1.0	-45.9	-13.0	-32.9	
7634.00	-13.2	H	3.0	35.8	1.0	-47.9	-13.0	-34.9	

**5MHz QPSK**  
 UL Verification Services, Inc.  
 Above 1GHz High Frequency Substitution Measurement

**Company:** LG Electronics  
**Project #:** 16122653  
**Date:** 1/21/2016  
**Test Engineer:** Lieu Nguyen  
**Configuration:** EUT with AC Adapter (X-Position)  
**Location:** Chamber C  
**Mode:** LTE\_QPSK Band 2 Harmonics, 5MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (HV)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Ch, 1852.5</b>									
3705.00	-18.3	V	3.0	35.9	1.0	-53.2	-13.0	-40.2	
5557.50	-16.9	V	3.0	35.5	1.0	-51.4	-13.0	-38.4	
7410.00	-9.7	V	3.0	35.7	1.0	-44.5	-13.0	-31.5	
3705.00	-15.5	H	3.0	35.9	1.0	-50.4	-13.0	-37.4	
5557.50	-17.5	H	3.0	35.5	1.0	-52.0	-13.0	-39.0	
7410.00	-13.4	H	3.0	35.7	1.0	-48.1	-13.0	-35.1	
<b>Mid Ch, 1880</b>									
3760.00	-18.0	V	3.0	35.8	1.0	-52.8	-13.0	-39.8	
5640.00	-17.2	V	3.0	35.5	1.0	-51.7	-13.0	-38.7	
7520.00	-9.2	V	3.0	35.7	1.0	-44.0	-13.0	-31.0	
3760.00	-15.4	H	3.0	35.8	1.0	-50.2	-13.0	-37.2	
5640.00	-12.1	H	3.0	35.5	1.0	-46.6	-13.0	-33.6	
7520.00	-8.6	H	3.0	35.7	1.0	-43.4	-13.0	-30.4	
<b>High Ch, 1907.5</b>									
3815.00	-16.8	V	3.0	35.8	1.0	-51.6	-13.0	-38.6	
5722.50	-15.1	V	3.0	35.5	1.0	-49.6	-13.0	-36.6	
7630.00	-8.1	V	3.0	35.8	1.0	-42.9	-13.0	-29.9	
3815.00	-16.4	H	3.0	35.8	1.0	-51.2	-13.0	-38.2	
5722.50	-12.3	H	3.0	35.5	1.0	-46.7	-13.0	-33.7	
7630.00	-8.5	H	3.0	35.8	1.0	-43.3	-13.0	-30.3	

**5MHz 16QAM**  
 UL Verification Services, Inc.  
 Above 1GHz High Frequency Substitution Measurement

**Company:** LG Electronics  
**Project #:** 16122653  
**Date:** 1/21/2016  
**Test Engineer:** Lieu Nguyen  
**Configuration:** EUT with AC Adapter  
**Location:** Chamber C  
**Mode:** LTE\_16QAM Band 2 Harmonics, 5MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (HV)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Ch, 1852.5</b>									
3705.00	-19.4	V	3.0	35.9	1.0	-54.2	-13.0	-41.2	
5557.50	-17.3	V	3.0	35.5	1.0	-51.8	-13.0	-38.8	
7410.00	-10.0	V	3.0	35.7	1.0	-44.8	-13.0	-31.8	
3705.00	-15.8	H	3.0	35.9	1.0	-50.6	-13.0	-37.6	
5557.50	-19.0	H	3.0	35.5	1.0	-53.5	-13.0	-40.5	
7410.00	-14.3	H	3.0	35.7	1.0	-49.0	-13.0	-36.0	
<b>Mid Ch, 1880</b>									
3760.00	-18.1	V	3.0	35.8	1.0	-52.9	-13.0	-39.9	
5640.00	-18.6	V	3.0	35.5	1.0	-53.1	-13.0	-40.1	
7520.00	-9.4	V	3.0	35.7	1.0	-44.2	-13.0	-31.2	
3760.00	-15.6	H	3.0	35.8	1.0	-50.4	-13.0	-37.4	
5640.00	-12.4	H	3.0	35.5	1.0	-46.9	-13.0	-33.9	
7520.00	-8.9	H	3.0	35.7	1.0	-43.6	-13.0	-30.6	
<b>High Ch, 1907.5</b>									
3815.00	-16.9	V	3.0	35.8	1.0	-51.7	-13.0	-38.7	
5722.50	-15.1	V	3.0	35.5	1.0	-49.6	-13.0	-36.6	
7630.00	-8.3	V	3.0	35.8	1.0	-43.1	-13.0	-30.1	
3815.00	-16.5	H	3.0	35.8	1.0	-51.3	-13.0	-38.3	
5722.50	-12.6	H	3.0	35.5	1.0	-47.1	-13.0	-34.1	
7630.00	-8.8	H	3.0	35.8	1.0	-43.6	-13.0	-30.6	

10MHz QPSK									
UL Verification Services, Inc.									
Above 1GHz High Frequency Substitution Measurement									
<b>Company:</b> LG Electronics									
<b>Project #:</b> 16122653									
<b>Date:</b> 1/21/2016									
<b>Test Engineer:</b> Lieu Nguyen									
<b>Configuration:</b> EUT with AC Adapter (X-Position)									
<b>Location:</b> Chamber C									
<b>Mode:</b> LTE_QPSK Band 2 Harmonics, 10MHz Bandwidth									
f MHz	SG reading (dBm)	Ant. Pol. (HV)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1855									
3710.00	-17.1	V	3.0	35.9	1.0	-51.9	-13.0	-38.9	
5565.00	-15.0	V	3.0	35.5	1.0	-49.5	-13.0	-36.5	
7420.00	-11.0	V	3.0	35.7	1.0	-46.7	-13.0	-32.7	
3710.00	-16.7	H	3.0	35.9	1.0	-51.6	-13.0	-38.6	
5565.00	-13.2	H	3.0	35.5	1.0	-47.7	-13.0	-34.7	
7420.00	-12.6	H	3.0	35.7	1.0	-47.4	-13.0	-34.4	
Mid Ch, 1880									
3760.00	-17.0	V	3.0	35.8	1.0	-51.9	-13.0	-38.9	
5640.00	-14.9	V	3.0	35.5	1.0	-49.4	-13.0	-36.4	
7520.00	-12.6	V	3.0	35.7	1.0	-47.3	-13.0	-34.3	
3760.00	-15.9	H	3.0	35.8	1.0	-50.7	-13.0	-37.7	
5640.00	-14.3	H	3.0	35.5	1.0	-48.8	-13.0	-35.8	
7520.00	-11.7	H	3.0	35.7	1.0	-46.4	-13.0	-32.4	
High Ch, 1905									
3810.00	-16.6	V	3.0	35.8	1.0	-51.4	-13.0	-38.4	
5715.00	-14.8	V	3.0	35.5	1.0	-49.3	-13.0	-36.3	
7620.00	-12.9	V	3.0	35.8	1.0	-47.7	-13.0	-34.7	
3810.00	-16.1	H	3.0	35.8	1.0	-50.9	-13.0	-37.9	
5715.00	-13.9	H	3.0	35.5	1.0	-48.4	-13.0	-35.4	
7620.00	-11.9	H	3.0	35.8	1.0	-46.6	-13.0	-32.6	

10MHz 16QAM									
UL Verification Services, Inc.									
Above 1GHz High Frequency Substitution Measurement									
<b>Company:</b> LG Electronics									
<b>Project #:</b> 16122653									
<b>Date:</b> 1/21/2016									
<b>Test Engineer:</b> Lieu Nguyen									
<b>Configuration:</b> EUT with AC Adapter (X-Position)									
<b>Location:</b> Chamber C									
<b>Mode:</b> LTE_16QAM Band 2 Harmonics, 10MHz Bandwidth									
f MHz	SG reading (dBm)	Ant. Pol. (HV)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1855									
3710.00	-17.6	V	3.0	35.9	1.0	-52.4	-13.0	-39.4	
5565.00	-15.8	V	3.0	35.5	1.0	-50.0	-13.0	-37.0	
7420.00	-11.3	V	3.0	35.7	1.0	-46.0	-13.0	-33.0	
3710.00	-16.7	H	3.0	35.9	1.0	-51.5	-13.0	-38.5	
5565.00	-13.5	H	3.0	35.5	1.0	-48.0	-13.0	-35.0	
7420.00	-13.6	H	3.0	35.7	1.0	-48.4	-13.0	-35.4	
Mid Ch, 1880									
3760.00	-17.1	V	3.0	35.8	1.0	-52.0	-13.0	-39.0	
5640.00	-15.3	V	3.0	35.5	1.0	-49.7	-13.0	-36.7	
7520.00	-12.9	V	3.0	35.7	1.0	-47.7	-13.0	-34.7	
3760.00	-15.7	H	3.0	35.8	1.0	-50.5	-13.0	-37.5	
5640.00	-14.5	H	3.0	35.5	1.0	-49.0	-13.0	-36.0	
7520.00	-12.1	H	3.0	35.7	1.0	-46.8	-13.0	-32.8	
High Ch, 1905									
3810.00	-16.0	V	3.0	35.8	1.0	-50.8	-13.0	-37.8	
5715.00	-14.9	V	3.0	35.5	1.0	-49.4	-13.0	-36.4	
7620.00	-12.7	V	3.0	35.8	1.0	-47.5	-13.0	-34.5	
3810.00	-16.4	H	3.0	35.8	1.0	-51.1	-13.0	-38.1	
5715.00	-14.1	H	3.0	35.5	1.0	-48.6	-13.0	-35.6	
7620.00	-12.4	H	3.0	35.8	1.0	-47.1	-13.0	-34.1	

15MHz QPSK									
UL Verification Services, Inc.									
Above 1GHz High Frequency Substitution Measurement									
<b>Company:</b> LG Electronics									
<b>Project #:</b> 16122653									
<b>Date:</b> 1/21/2016									
<b>Test Engineer:</b> Lieu Nguyen									
<b>Configuration:</b> EUT with AC Adapter (X-Position)									
<b>Location:</b> Chamber C									
<b>Mode:</b> LTE_QPSK Band 2 Harmonics, 15MHz Bandwidth									
f MHz	SG reading (dBm)	Ant. Pol. (HV)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1857.5									
3715.00	-17.2	V	3.0	35.8	1.0	-52.0	-13.0	-39.0	
5572.50	-13.9	V	3.0	35.5	1.0	-48.4	-13.0	-35.4	
7430.00	-11.0	V	3.0	35.7	1.0	-45.8	-13.0	-32.8	
3715.00	-16.5	H	3.0	35.8	1.0	-51.4	-13.0	-38.4	
5572.50	-13.7	H	3.0	35.5	1.0	-48.1	-13.0	-35.1	
7430.00	-12.0	H	3.0	35.7	1.0	-46.7	-13.0	-33.7	
Mid Ch, 1880									
3760.00	-16.2	V	3.0	35.8	1.0	-51.1	-13.0	-38.1	
5640.00	-13.9	V	3.0	35.5	1.0	-48.4	-13.0	-35.4	
7520.00	-12.2	V	3.0	35.7	1.0	-46.9	-13.0	-33.9	
3760.00	-16.0	H	3.0	35.8	1.0	-50.9	-13.0	-37.9	
5640.00	-14.3	H	3.0	35.5	1.0	-48.8	-13.0	-35.8	
7520.00	-11.9	H	3.0	35.7	1.0	-46.6	-13.0	-32.6	
High Ch, 1902.5									
3805.00	-16.1	V	3.0	35.8	1.0	-50.8	-13.0	-37.8	
5707.50	-14.6	V	3.0	35.5	1.0	-49.0	-13.0	-36.0	
7610.00	-12.5	V	3.0	35.8	1.0	-47.2	-13.0	-34.2	
3805.00	-16.5	H	3.0	35.8	1.0	-51.2	-13.0	-38.2	
5707.50	-14.2	H	3.0	35.5	1.0	-48.7	-13.0	-35.7	
7610.00	-11.5	H	3.0	35.8	1.0	-46.3	-13.0	-32.3	

15MHz 16QAM									
UL Verification Services, Inc.									
Above 1GHz High Frequency Substitution Measurement									
<b>Company:</b> LG Electronics									
<b>Project #:</b> 16122653									
<b>Date:</b> 1/21/2016									
<b>Test Engineer:</b> Lieu Nguyen									
<b>Configuration:</b> EUT with AC Adapter (X-Position)									
<b>Location:</b> Chamber C									
<b>Mode:</b> LTE_16QAM Band 2 Harmonics, 15MHz Bandwidth									
f MHz	SG reading (dBm)	Ant. Pol. (HV)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1857.5									
3715.00	-17.6	V	3.0	35.8	1.0	-52.4	-13.0	-39.4	
5572.50	-14.2	V	3.0	35.5	1.0	-48.7	-13.0	-35.7	
7430.00	-11.8	V	3.0	35.7	1.0	-46.5	-13.0	-33.5	
3715.00	-16.5	H	3.0	35.8	1.0	-51.4	-13.0	-38.4	
5572.50	-13.6	H	3.0	35.5	1.0	-48.1	-13.0	-35.1	
7430.00	-12.4	H	3.0	35.7	1.0	-47.1	-13.0	-34.1	
Mid Ch, 1880									
3760.00	-16.6	V	3.0	35.8	1.0	-51.5	-13.0	-38.5	
5640.00	-14.5	V	3.0	35.5	1.0	-48.9	-13.0	-35.9	
7520.00	-12.9	V	3.0	35.7	1.0	-47.6	-13.0	-34.6	
3760.00	-16.0	H	3.0	35.8	1.0	-50.8	-13.0	-37.8	
5640.00	-14.4	H	3.0	35.5	1.0	-48.9	-13.0	-35.9	
7520.00	-12.2	H	3.0	35.7	1.0	-47.0	-13.0	-34.0	
High Ch, 1902.5									
3805.00	-16.4	V	3.0	35.8	1.0	-51.2	-13.0	-38.2	
5707.50	-14.7	V	3.0	35.5	1.0	-49.2	-13.0	-36.2	
7610.00	-12.8	V	3.0	35.8	1.0	-47.6	-13.0	-34.6	
3805.00	-16.3	H	3.0	35.8	1.0	-51.0	-13.0	-38.0	
5707.50	-14.3	H	3.0	35.5	1.0	-48.8	-13.0	-35.8	
7610.00	-11.9	H	3.0	35.8	1.0	-46.7	-13.0	-32.7	

20MHz QPSK									
UL Verification Services, Inc.									
Above 1GHz High Frequency Substitution Measurement									
<b>Company:</b> LG Electronics									
<b>Project #:</b> 16122653									
<b>Date:</b> 1/21/2016									
<b>Test Engineer:</b> Lieu Nguyen									
<b>Configuration:</b> EUT with AC Adapter (X-Position)									
<b>Location:</b> Chamber C									
<b>Mode:</b> LTE_16QAM Band 2 Harmonics, 20MHz Bandwidth									
f MHz	SG reading (dBm)	Ant. Pol. (HV)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1860									
3720.00	-17.8	V	3.0	35.8	1.0	-52.6	-13.0	-39.6	
5580.00	-14.3	V	3.0	35.5	1.0	-48.8	-13.0	-35.8	
7440.00	-10.8	V	3.0	35.7	1.0	-45.5	-13.0	-32.5	
3720.00	-16.7	H	3.0	35.8	1.0	-51.6	-13.0	-38.6	
5580.00	-12.6	H	3.0	35.5	1.0	-47.0	-13.0	-34.0	
7440.00	-12.0	H	3.0	35.7	1.0	-46.8	-13.0	-33.8	
Mid Ch, 1880									
3760.00	-17.0	V	3.0	35.8	1.0	-51.8	-13.0	-38.8	
5640.00	-14.8	V	3.0	35.5	1.0	-49.3	-13.0	-36.3	
7520.00	-12.9	V	3.0	35.7	1.0	-47.6	-13.0	-34.6	
3760.00	-16.1	H	3.0	35.8	1.0	-50.9	-13.0	-37.9	
5640.00	-14.3	H	3.0	35.5	1.0	-48.8	-13.0	-35.8	
7520.00	-12.6	H	3.0	35.7	1.0	-47.4	-13.0	-34.4	
High Ch, 1900									
3800.00	-15.2	V	3.0	35.8	1.0	-50.0	-13.0	-37.0	
5700.00	-15.4	V	3.0	35.5	1.0	-49.9	-13.0	-36.9	
7600.00	-12.9	V	3.0	35.8	1.0	-47.6	-13.0	-34.6	
3800.00	-16.5	H	3.0	35.8	1.0	-51.2	-13.0	-38.2	
5700.00	-14.3	H	3.0	35.5	1.0	-48.8	-13.0	-35.8	
7600.00	-12.1	H	3.0	35.8	1.0	-46.8	-13.0	-33.8	

20MHz 16QAM									
UL Verification Services, Inc.									
Above 1GHz High Frequency Substitution Measurement									
<b>Company:</b> LG Electronics									
<b>Project #:</b> 16122653									
<b>Date:</b> 1/21/2016									
<b>Test Engineer:</b> Lieu Nguyen									
<b>Configuration:</b> EUT with AC Adapter (X-Position)									
<b>Location:</b> Chamber C									
<b>Mode:</b> LTE_16QAM Band 2 Harmonics, 20MHz Bandwidth									
f MHz	SG reading (dBm)	Ant. Pol. (HV)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 1860									
3720.00									

**LTE Band 4**

**1.4MHz QPSK**

**UL Verification Services, Inc.**  
**Above 1GHz High Frequency Substitution Measurement**

**Company:** LG Electronics  
**Project #:** 16122653  
**Date:** 1/22/2016  
**Test Engineer:** Lieu Nguyen  
**Configuration:** EUT with AC Adapter (X-Position)  
**Location:** Chamber C  
**Mode:** LTE\_QPSK Band 4 Harmonics, 1.4MHz Bandwidth

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Ch, 1710.7</b>									
3421.40	-14.9	V	3.0	36.1	1.0	50.0	-13.0	-37.0	
5132.10	-11.5	V	3.0	35.4	1.0	46.0	-13.0	-33.0	
6842.80	-11.7	V	3.0	35.7	1.0	46.3	-13.0	-33.3	
3421.40	-14.5	H	3.0	36.1	1.0	49.6	-13.0	-36.6	
5132.10	-11.9	H	3.0	35.4	1.0	46.3	-13.0	-33.3	
6842.80	-11.2	H	3.0	35.7	1.0	45.8	-13.0	-32.8	
<b>Mid Ch, 1732.5</b>									
3465.00	-12.9	V	3.0	36.0	1.0	48.0	-13.0	-35.0	
5197.50	-13.3	V	3.0	35.4	1.0	47.7	-13.0	-34.7	
6930.00	-12.4	V	3.0	35.7	1.0	47.0	-13.0	-34.0	
3465.00	-13.1	H	3.0	36.0	1.0	48.1	-13.0	-35.1	
5197.50	-12.2	H	3.0	35.4	1.0	46.6	-13.0	-33.6	
6930.00	-12.0	H	3.0	35.7	1.0	46.6	-13.0	-33.6	
<b>High Ch, 1754.3</b>									
3508.60	-13.0	V	3.0	36.0	1.0	48.0	-13.0	-35.0	
5262.90	-12.7	V	3.0	35.4	1.0	47.1	-13.0	-34.1	
7017.20	-11.9	V	3.0	35.7	1.0	46.5	-13.0	-33.5	
3508.60	-13.4	H	3.0	36.0	1.0	49.4	-13.0	-35.4	
5262.90	-11.5	H	3.0	35.4	1.0	46.0	-13.0	-33.0	
7017.20	-10.9	H	3.0	35.7	1.0	45.6	-13.0	-32.6	

**1.4MHz 16QAM**

**UL Verification Services, Inc.**  
**Above 1GHz High Frequency Substitution Measurement**

**Company:** LG Electronics  
**Project #:** 16122653  
**Date:** 1/22/2016  
**Test Engineer:** Lieu Nguyen  
**Configuration:** EUT with AC Adapter (X-Position)  
**Location:** Chamber C  
**Mode:** LTE\_16QAM Band 4 Harmonics, 1.4MHz Bandwidth

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Ch, 1710.7</b>									
3421.40	-15.6	V	3.0	36.1	1.0	50.6	-13.0	-37.6	
5132.10	-11.5	V	3.0	35.4	1.0	46.0	-13.0	-33.0	
6842.80	-11.9	V	3.0	35.7	1.0	46.5	-13.0	-33.5	
3421.40	-17.5	H	3.0	36.1	1.0	52.6	-13.0	-39.6	
5132.10	-13.4	H	3.0	35.4	1.0	47.8	-13.0	-34.8	
6842.80	-11.7	H	3.0	35.7	1.0	46.4	-13.0	-33.4	
<b>Mid Ch, 1732.5</b>									
3465.00	-15.4	V	3.0	36.0	1.0	50.4	-13.0	-37.4	
5197.50	-11.5	V	3.0	35.4	1.0	45.9	-13.0	-32.9	
6930.00	-11.9	V	3.0	35.7	1.0	46.6	-13.0	-33.6	
3465.00	-17.6	H	3.0	36.0	1.0	52.7	-13.0	-39.7	
5197.50	-13.0	H	3.0	35.4	1.0	47.5	-13.0	-34.5	
6930.00	-11.4	H	3.0	35.7	1.0	46.0	-13.0	-33.0	
<b>High Ch, 1754.3</b>									
3508.60	-14.9	V	3.0	36.0	1.0	49.9	-13.0	-36.9	
5262.90	-11.7	V	3.0	35.4	1.0	46.1	-13.0	-33.1	
7017.20	-12.1	V	3.0	35.7	1.0	46.8	-13.0	-33.8	
3508.60	-16.8	H	3.0	36.0	1.0	51.8	-13.0	-38.8	
5262.90	-12.3	H	3.0	35.4	1.0	46.8	-13.0	-33.8	
7017.20	-10.7	H	3.0	35.7	1.0	45.3	-13.0	-32.3	

**3MHz QPSK**

**UL Verification Services, Inc.**  
**Above 1GHz High Frequency Substitution Measurement**

**Company:** LG Electronics  
**Project #:** 16122653  
**Date:** 1/22/2016  
**Test Engineer:** Lieu Nguyen  
**Configuration:** EUT with AC Adapter (X-Position)  
**Location:** Chamber C  
**Mode:** LTE\_QPSK Band 4 Harmonics, 3MHz Bandwidth

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Ch, 1711.5</b>									
3423.00	-15.1	V	3.0	36.1	1.0	50.1	-13.0	-37.1	
5134.50	-11.9	V	3.0	35.4	1.0	46.4	-13.0	-33.4	
6846.00	-9.0	V	3.0	35.7	1.0	43.7	-13.0	-30.7	
3423.00	-16.1	H	3.0	36.1	1.0	51.2	-13.0	-38.2	
5134.50	-12.0	H	3.0	35.4	1.0	46.4	-13.0	-33.4	
6846.00	-9.4	H	3.0	35.7	1.0	44.1	-13.0	-31.1	
<b>Mid Ch, 1732.5</b>									
3465.00	-14.9	V	3.0	36.0	1.0	49.9	-13.0	-36.9	
5197.50	-12.0	V	3.0	35.4	1.0	46.4	-13.0	-33.4	
6930.00	-9.0	V	3.0	35.7	1.0	43.7	-13.0	-30.7	
3465.00	-15.1	H	3.0	36.0	1.0	50.1	-13.0	-37.1	
5197.50	-11.7	H	3.0	35.4	1.0	46.1	-13.0	-33.1	
6930.00	-9.3	H	3.0	35.7	1.0	44.0	-13.0	-31.0	
<b>High Ch, 1753.5</b>									
3507.00	-15.6	V	3.0	36.0	1.0	50.6	-13.0	-37.6	
5260.50	-9.6	V	3.0	35.4	1.0	47.0	-13.0	-34.0	
7014.00	-12.0	V	3.0	35.7	1.0	43.7	-13.0	-30.7	
3507.00	-16.8	H	3.0	36.0	1.0	51.8	-13.0	-38.8	
5260.50	-10.7	H	3.0	35.4	1.0	45.2	-13.0	-32.2	
7014.00	-9.0	H	3.0	35.7	1.0	43.7	-13.0	-30.7	

**3MHz 16QAM**

**UL Verification Services, Inc.**  
**Above 1GHz High Frequency Substitution Measurement**

**Company:** LG Electronics  
**Project #:** 16122653  
**Date:** 1/22/2016  
**Test Engineer:** Lieu Nguyen  
**Configuration:** EUT with AC Adapter (X-Position)  
**Location:** Chamber C  
**Mode:** LTE\_16QAM Band 4 Harmonics, 3MHz Bandwidth

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Ch, 1711.5</b>									
3423.00	-15.8	V	3.0	36.1	1.0	50.9	-13.0	-37.9	
5134.50	-12.7	V	3.0	35.4	1.0	47.2	-13.0	-34.2	
6846.00	-10.1	V	3.0	35.7	1.0	44.8	-13.0	-31.8	
3423.00	-17.3	H	3.0	36.1	1.0	52.4	-13.0	-39.4	
5134.50	-13.1	H	3.0	35.4	1.0	47.5	-13.0	-34.5	
6846.00	-10.0	H	3.0	35.7	1.0	44.7	-13.0	-31.7	
<b>Mid Ch, 1732.5</b>									
3465.00	-15.4	V	3.0	36.0	1.0	50.4	-13.0	-37.4	
5197.50	-12.6	V	3.0	35.4	1.0	47.1	-13.0	-34.1	
6930.00	-9.7	V	3.0	35.7	1.0	44.3	-13.0	-31.3	
3465.00	-15.5	H	3.0	36.0	1.0	50.5	-13.0	-37.5	
5197.50	-12.2	H	3.0	35.4	1.0	46.6	-13.0	-33.6	
6930.00	-9.5	H	3.0	35.7	1.0	44.2	-13.0	-31.2	
<b>High Ch, 1753.5</b>									
3507.00	-15.8	V	3.0	36.0	1.0	50.8	-13.0	-37.8	
5260.50	-12.8	V	3.0	35.4	1.0	47.2	-13.0	-34.2	
7014.00	-9.5	V	3.0	35.7	1.0	44.1	-13.0	-31.1	
3507.00	-16.9	H	3.0	36.0	1.0	51.9	-13.0	-38.9	
5260.50	-11.0	H	3.0	35.4	1.0	45.4	-13.0	-32.4	
7014.00	-9.2	H	3.0	35.7	1.0	43.9	-13.0	-30.9	

**5MHz QPSK**

**UL Verification Services, Inc.**  
**Above 1GHz High Frequency Substitution Measurement**

**Company:** LG Electronics  
**Project #:** 16122653  
**Date:** 1/22/2016  
**Test Engineer:** Lieu Nguyen  
**Configuration:** EUT with AC Adapter (X-Position)  
**Location:** Chamber C  
**Mode:** LTE\_QPSK Band 4 Harmonics, 5MHz Bandwidth

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Ch, 1712.5</b>									
3425.00	-15.8	V	3.0	36.1	1.0	50.9	-13.0	-37.9	
5137.50	-11.7	V	3.0	35.4	1.0	46.2	-13.0	-33.2	
6850.00	-10.9	V	3.0	35.7	1.0	45.5	-13.0	-32.5	
3425.00	-15.0	H	3.0	36.1	1.0	50.1	-13.0	-37.1	
5137.50	-11.2	H	3.0	35.4	1.0	45.6	-13.0	-32.6	
6850.00	-9.3	H	3.0	35.7	1.0	44.0	-13.0	-31.0	
<b>Mid Ch, 1732.5</b>									
3465.00	-15.0	V	3.0	36.0	1.0	50.1	-13.0	-37.1	
5197.50	-12.3	V	3.0	35.4	1.0	46.7	-13.0	-33.7	
6930.00	-9.6	V	3.0	35.7	1.0	44.2	-13.0	-31.2	
3465.00	-15.1	H	3.0	36.0	1.0	50.1	-13.0	-37.1	
5197.50	-11.0	H	3.0	35.4	1.0	45.4	-13.0	-32.4	
6930.00	-8.3	H	3.0	35.7	1.0	43.0	-13.0	-30.0	
<b>High Ch, 1752.5</b>									
3505.00	-15.2	V	3.0	36.0	1.0	50.2	-13.0	-37.2	
5257.50	-11.9	V	3.0	35.4	1.0	46.3	-13.0	-33.3	
7010.00	-8.6	V	3.0	35.7	1.0	43.2	-13.0	-30.2	
3505.00	-15.9	H	3.0	36.0	1.0	50.9	-13.0	-37.9	
5257.50	-10.2	H	3.0	35.4	1.0	44.6	-13.0	-31.6	
7010.00	-7.5	H	3.0	35.7	1.0	42.2	-13.0	-29.2	

**5MHz 16QAM**

**UL Verification Services, Inc.**  
**Above 1GHz High Frequency Substitution Measurement**

**Company:** LG Electronics  
**Project #:** 16122653  
**Date:** 1/22/2016  
**Test Engineer:** Lieu Nguyen  
**Configuration:** EUT with AC Adapter (X-Position)  
**Location:** Chamber C  
**Mode:** LTE\_16QAM Band 4 Harmonics, 5MHz Bandwidth

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Ch, 1712.5</b>									
3425.00	-16.4	V	3.0	36.1	1.0	51.4	-13.0	-38.4	
5137.50	-12.2	V	3.0	35.4	1.0	46.6	-13.0	-33.6	
6850.00	-11.1	V	3.0	35.7	1.0	45.7	-13.0	-32.7	
3425.00	-16.1	H	3.0	36.1	1.0	51.2	-13.0	-38.2	
5137.50	-11.5	H	3.0	35.4	1.0	45.9	-13.0	-32.9	
6850.00	-9.4	H	3.0	35.7	1.0	44.1	-13.0	-31.1	
<b>Mid Ch, 1732.5</b>									
3465.00	-15.5	V	3.0	36.0	1.0	50.5	-13.0	-37.5	
5197.50	-12.6	V	3.0	35.4	1.0	47.0	-13.0	-34.0	
6930.00	-9.4	V	3.0	35.7	1.0	44.1	-13.0	-31.1	
3465.00	-15.5	H	3.0	36.0	1.0	50.5	-13.0	-37.5	
5197.50	-11.5	H	3.0	35.4	1.0	46.0	-13.0	-33.0	
6930.00	-8.1	H	3.0	35.7	1.0	42.8	-13.0	-29.8	
<b>High Ch, 1752.5</b>									
3505.00	-15.6	V	3.0	36.0	1.0	50.6	-13.0	-37.6	
5257.50	-11.6	V	3.0	35.4	1.0	46.0	-13.0	-33.0	
7010.00	-8.6	V	3.0	35.7	1.0	43.3	-13.0	-30.3	
3505.00	-16.0	H	3.0	36.0	1.0	51.0	-13.0	-38.0	
5257.50	-10.8	H	3.0	35.4	1.0	45.2	-13.0	-32.2	
7010.00	-8.3	H	3.0	35.7	1.0	42.9	-13.0	-29.9	

**10MHz QPSK**  
 UL Verification Services, Inc.  
 Above 1GHz High Frequency Substitution Measurement

**Company:** LG Electronics  
**Project #:** 16122653  
**Date:** 1/22/2016  
**Test Engineer:** Lieu Nguyen  
**Configuration:** EUT with AC Adapter (X-Position)  
**Location:** Chamber C  
**Mode:** LTE\_QPSK Band 4 Harmonics, 10MHz Bandwidth

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Ch, 1715</b>									
3430.00	-15.3	V	3.0	36.1	1.0	-50.4	-13.0	-37.4	
5145.00	-10.7	V	3.0	35.4	1.0	-45.1	-13.0	-32.1	
6860.00	-10.7	V	3.0	35.7	1.0	-45.3	-13.0	-32.3	
3430.00	-15.2	H	3.0	36.1	1.0	-50.3	-13.0	-37.3	
5145.00	-11.1	H	3.0	35.4	1.0	-45.5	-13.0	-32.5	
6860.00	-8.2	H	3.0	35.7	1.0	-42.9	-13.0	-29.9	
<b>Mid Ch, 1732.5</b>									
3465.00	-15.2	V	3.0	36.0	1.0	-50.2	-13.0	-37.2	
5197.50	-11.1	V	3.0	35.4	1.0	-45.5	-13.0	-32.5	
6930.00	-10.4	V	3.0	35.7	1.0	-45.1	-13.0	-32.1	
3465.00	-15.2	H	3.0	36.0	1.0	-50.3	-13.0	-37.3	
5197.50	-10.5	H	3.0	35.4	1.0	-44.9	-13.0	-31.9	
6930.00	-8.4	H	3.0	35.7	1.0	-43.0	-13.0	-30.0	
<b>High Ch, 1750</b>									
3500.00	-15.6	V	3.0	36.0	1.0	-50.6	-13.0	-37.6	
5250.00	-10.6	V	3.0	35.4	1.0	-45.0	-13.0	-32.0	
7000.00	-8.1	V	3.0	35.7	1.0	-42.8	-13.0	-29.8	
3500.00	-15.9	H	3.0	36.0	1.0	-50.9	-13.0	-37.9	
5250.00	-10.3	H	3.0	35.4	1.0	-44.8	-13.0	-31.8	
7000.00	-7.7	H	3.0	35.7	1.0	-42.4	-13.0	-29.4	

**10MHz 16QAM**  
 UL Verification Services, Inc.  
 Above 1GHz High Frequency Substitution Measurement

**Company:** LG Electronics  
**Project #:** 16122653  
**Date:** 1/22/2016  
**Test Engineer:** Lieu Nguyen  
**Configuration:** EUT with AC Adapter (X-Position)  
**Location:** Chamber C  
**Mode:** LTE\_16QAM Band 4 Harmonics, 10MHz Bandwidth

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Ch, 1715</b>									
3430.00	-16.1	V	3.0	36.1	1.0	-51.2	-13.0	-38.2	
5145.00	-12.4	V	3.0	35.4	1.0	-46.8	-13.0	-33.8	
6860.00	-10.7	V	3.0	35.7	1.0	-45.3	-13.0	-32.3	
3430.00	-16.3	H	3.0	36.1	1.0	-51.4	-13.0	-38.4	
5145.00	-12.3	H	3.0	35.4	1.0	-46.7	-13.0	-33.7	
6860.00	-9.6	H	3.0	35.7	1.0	-44.2	-13.0	-31.2	
<b>Mid Ch, 1732.5</b>									
3465.00	-15.9	V	3.0	36.0	1.0	-50.9	-13.0	-37.9	
5197.50	-12.2	V	3.0	35.4	1.0	-46.6	-13.0	-33.6	
6930.00	-10.1	V	3.0	35.7	1.0	-44.8	-13.0	-31.8	
3465.00	-15.5	H	3.0	36.0	1.0	-50.6	-13.0	-37.6	
5197.50	-10.9	H	3.0	35.4	1.0	-45.3	-13.0	-32.3	
6930.00	-9.3	H	3.0	35.7	1.0	-43.9	-13.0	-30.9	
<b>High Ch, 1750</b>									
3500.00	-15.8	V	3.0	36.0	1.0	-50.8	-13.0	-37.8	
5250.00	-11.8	V	3.0	35.4	1.0	-46.2	-13.0	-33.2	
7000.00	-10.2	V	3.0	35.7	1.0	-44.3	-13.0	-31.3	
3500.00	-15.9	H	3.0	36.0	1.0	-50.9	-13.0	-37.9	
5250.00	-11.9	H	3.0	35.4	1.0	-46.3	-13.0	-33.3	
7000.00	-9.1	H	3.0	35.7	1.0	-43.8	-13.0	-30.8	

**15MHz QPSK**  
 UL Verification Services, Inc.  
 Above 1GHz High Frequency Substitution Measurement

**Company:** LG Electronics  
**Project #:** 16122653  
**Date:** 1/22/2016  
**Test Engineer:** Lieu Nguyen  
**Configuration:** EUT with AC Adapter (X-Position)  
**Location:** Chamber C  
**Mode:** LTE\_QPSK Band 4 Harmonics, 15MHz Bandwidth

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Ch, 1717.5</b>									
3435.00	-13.0	V	3.0	36.1	1.0	-48.1	-13.0	-35.1	
5152.50	-11.5	V	3.0	35.4	1.0	-45.9	-13.0	-32.9	
6870.00	-12.1	V	3.0	35.7	1.0	-46.8	-13.0	-33.8	
3435.00	-12.5	H	3.0	36.1	1.0	-47.6	-13.0	-34.6	
5152.50	-10.3	H	3.0	35.4	1.0	-44.7	-13.0	-31.7	
6870.00	-11.1	H	3.0	35.7	1.0	-45.8	-13.0	-32.8	
<b>Mid Ch, 1732.5</b>									
3465.00	-12.1	V	3.0	36.0	1.0	-47.1	-13.0	-34.1	
5197.50	-11.8	V	3.0	35.4	1.0	-46.3	-13.0	-33.3	
6930.00	-9.6	V	3.0	35.7	1.0	-44.2	-13.0	-31.2	
3465.00	-12.5	H	3.0	36.0	1.0	-47.5	-13.0	-34.5	
5197.50	-12.0	H	3.0	35.4	1.0	-46.5	-13.0	-33.5	
6930.00	-9.1	H	3.0	35.7	1.0	-43.7	-13.0	-30.7	
<b>High Ch, 1747.5</b>									
3495.00	-12.3	V	3.0	36.0	1.0	-47.3	-13.0	-34.3	
5242.50	-11.6	V	3.0	35.4	1.0	-46.0	-13.0	-33.0	
6990.00	-10.2	V	3.0	35.7	1.0	-44.9	-13.0	-31.9	
3495.00	-12.6	H	3.0	36.0	1.0	-47.6	-13.0	-34.6	
5242.50	-10.8	H	3.0	35.4	1.0	-45.2	-13.0	-32.2	
6990.00	-9.2	H	3.0	35.7	1.0	-43.8	-13.0	-30.8	

**15MHz 16QAM**  
 UL Verification Services, Inc.  
 Above 1GHz High Frequency Substitution Measurement

**Company:** LG Electronics  
**Project #:** 16122653  
**Date:** 1/22/2016  
**Test Engineer:** Lieu Nguyen  
**Configuration:** EUT with AC Adapter (X-Position)  
**Location:** Chamber C  
**Mode:** LTE\_16QAM Band 4 Harmonics, 15MHz Bandwidth

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Ch, 1717.5</b>									
3435.00	-13.5	V	3.0	36.1	1.0	-48.6	-13.0	-35.6	
5152.50	-12.4	V	3.0	35.4	1.0	-46.8	-13.0	-33.8	
6870.00	-10.7	V	3.0	35.7	1.0	-45.3	-13.0	-32.3	
3435.00	-12.9	H	3.0	36.1	1.0	-47.9	-13.0	-34.9	
5152.50	-11.1	H	3.0	35.4	1.0	-45.5	-13.0	-32.5	
6870.00	-10.9	H	3.0	35.7	1.0	-45.6	-13.0	-32.6	
<b>Mid Ch, 1732.5</b>									
3465.00	-12.5	V	3.0	36.0	1.0	-47.6	-13.0	-34.6	
5197.50	-12.1	V	3.0	35.4	1.0	-46.5	-13.0	-33.5	
6930.00	-9.4	V	3.0	35.7	1.0	-44.0	-13.0	-31.0	
3465.00	-13.0	H	3.0	36.0	1.0	-48.0	-13.0	-35.0	
5197.50	-12.3	H	3.0	35.4	1.0	-46.8	-13.0	-33.8	
6930.00	-9.8	H	3.0	35.7	1.0	-44.5	-13.0	-31.5	
<b>High Ch, 1747.5</b>									
3495.00	-12.5	V	3.0	36.0	1.0	-47.5	-13.0	-34.5	
5242.50	-11.5	V	3.0	35.4	1.0	-45.9	-13.0	-32.9	
6990.00	-10.3	V	3.0	35.7	1.0	-44.9	-13.0	-31.9	
3495.00	-12.7	H	3.0	36.0	1.0	-47.7	-13.0	-34.7	
5242.50	-11.1	H	3.0	35.4	1.0	-45.5	-13.0	-32.5	
6990.00	-9.8	H	3.0	35.7	1.0	-44.5	-13.0	-31.5	

**20MHz QPSK**  
 UL Verification Services, Inc.  
 Above 1GHz High Frequency Substitution Measurement

**Company:** LG Electronics  
**Project #:** 16122653  
**Date:** 1/22/2016  
**Test Engineer:** Lieu Nguyen  
**Configuration:** EUT with AC Adapter (X-Position)  
**Location:** Chamber C  
**Mode:** LTE\_QPSK Band 4 Harmonics, 20MHz Bandwidth

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Ch, 1720</b>									
3440.00	-12.0	V	3.0	36.0	1.0	-47.1	-13.0	-34.1	
5160.00	-11.1	V	3.0	35.4	1.0	-45.5	-13.0	-32.5	
6880.00	-9.4	V	3.0	35.7	1.0	-44.1	-13.0	-31.1	
3440.00	-11.7	H	3.0	36.0	1.0	-46.7	-13.0	-33.7	
5160.00	-10.0	H	3.0	35.4	1.0	-44.4	-13.0	-31.4	
6880.00	-8.3	H	3.0	35.7	1.0	-42.9	-13.0	-29.9	
<b>Mid Ch, 1732.5</b>									
3465.00	-12.4	V	3.0	36.0	1.0	-47.4	-13.0	-34.4	
5197.50	-11.9	V	3.0	35.4	1.0	-46.3	-13.0	-33.3	
6930.00	-9.1	V	3.0	35.7	1.0	-43.8	-13.0	-30.8	
3465.00	-13.0	H	3.0	36.0	1.0	-48.0	-13.0	-35.0	
5197.50	-11.3	H	3.0	35.4	1.0	-45.7	-13.0	-32.7	
6930.00	-8.3	H	3.0	35.7	1.0	-42.9	-13.0	-29.9	
<b>High Ch, 1745</b>									
3490.00	-11.9	V	3.0	36.0	1.0	-47.0	-13.0	-34.0	
5235.00	-11.4	V	3.0	35.4	1.0	-45.9	-13.0	-32.9	
6880.00	-8.9	V	3.0	35.7	1.0	-43.5	-13.0	-30.5	
3490.00	-12.5	H	3.0	36.0	1.0	-47.5	-13.0	-34.5	
5235.00	-10.5	H	3.0	35.4	1.0	-45.0	-13.0	-32.0	
6880.00	-8.2	H	3.0	35.7	1.0	-42.9	-13.0	-29.9	

**20MHz 16QAM**  
 UL Verification Services, Inc.  
 Above 1GHz High Frequency Substitution Measurement

**Company:** LG Electronics  
**Project #:** 16122653  
**Date:** 1/22/2016  
**Test Engineer:** Lieu Nguyen  
**Configuration:** EUT with AC Adapter (X-Position)  
**Location:** Chamber C  
**Mode:** LTE\_16QAM Band 4 Harmonics, 20MHz Bandwidth

f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Ch, 1720</b>									
3440.00	-12.5	V	3.0	36.0	1.0	-47.5	-13.0	-34.5	
5160.00	-11.8	V	3.0	35.4	1.0	-46.3	-13.0	-33.3	
6880.00	-9.6	V	3.0	35.7	1.0	-44.3	-13.0	-31.3	
3440.00	-11.8	H	3.0	36.0	1.0	-46.9	-13.0	-33.9	
5160.00	-11.0	H	3.0	35.4	1.0	-45.4	-13.0	-32.4	
6880.00	-9.0	H	3.0	35.7	1.0	-43.6	-13.0	-30.6	
<b>Mid Ch, 1732.5</b>									
3465.00	-12.5	V	3.0	36.0	1.0	-47.5	-13.0	-34.5	
5197.50	-12.1	V	3.0	35.4	1.0	-46.6	-13.0	-33.6	
6930.00	-10.2	V	3.0	35.7	1.0	-44.9	-13.0	-31.9	
3465.00	-12.7	H	3.0	36.0	1.0	-47.7	-13.0	-34.7	
5197.50	-11.4	H	3.0	35.4	1.0	-45.8	-13.0	-32.8	
6930.00	-9.0	H	3.0	35.7	1.0	-43.6	-13.0	-30.6	
<b>High Ch, 1745</b>									
3490.00	-11.8	V	3.0	36.0	1.0	-46.8	-13.0	-33.8	
5235.00	-11.5	V	3.0	35.4	1.0	-45.9	-13.0	-32.9	
6880.00	-10.3	V	3.0	35.7	1.0	-44.9	-13.0	-31.9	
3490.00	-12.0	H	3.0	36.0	1.0	-47.0	-13.0	-34.0	
5235.00	-11.0	H	3.0	35.4	1.0	-45.3	-13.0	-32.3	
6880.00	-8.9	H	3.0	35.7	1.0	-43.5	-13.0	-30.5	



**LTE Band 13**

5MHz QPSK											5MHz 16QAM																																
UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement											UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement																																
Company:		LG Electronics									Company:		LG Electronics																														
Project #:		1622653									Project #:		1622653																														
Date:		1/21/2016									Date:		1/21/2016																														
Test Engineer:		Lieu Nguyen									Test Engineer:		Lieu Nguyen																														
Configuration:		EUT + AC Adapter									Configuration:		EUT + AC Adapter																														
Location:		Chamber C									Location:		Chamber C																														
Mode:		LTE_QPSK Band 13 Harmonics, 5MHz Bandwidth									Mode:		LTE_16QAM Band 13 Harmonics, 5MHz Bandwidth																														
f	SG reading	Ant. Pol.	Distance	Preamp	Filter	ERP	Limit	Delta	Notes		f	SG reading	Ant. Pol.	Distance	Preamp	Filter	ERP	Limit	Delta	Notes																							
MHz	(dBm)	(HV)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)			MHz	(dBm)	(HV)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)																								
<b>Lower Ch, 779.5</b>																																											
1569.00	-30.9	V	3.0	37.1	1.0	-67.0	-13.0	-54.0			1569.00	-29.9	V	3.0	37.1	1.0	-66.1	-13.0	-53.1																								
2338.50	-25.4	V	3.0	36.5	1.0	-60.9	-13.0	-47.9			2338.50	-24.4	V	3.0	36.5	1.0	-59.9	-13.0	-46.9																								
3118.00	-22.9	V	3.0	36.3	1.0	-58.2	-13.0	-45.2			3118.00	-22.0	V	3.0	36.3	1.0	-57.3	-13.0	-44.3																								
1569.00	-30.0	H	3.0	37.1	1.0	-65.1	-13.0	-52.1			1569.00	-30.5	H	3.0	37.1	1.0	-66.7	-13.0	-53.7																								
2338.50	-24.5	H	3.0	36.5	1.0	-60.0	-13.0	-47.0			2338.50	-25.4	H	3.0	36.5	1.0	-60.9	-13.0	-47.9																								
3118.00	-21.3	H	3.0	36.3	1.0	-56.6	-13.0	-43.6			3118.00	-22.4	H	3.0	36.3	1.0	-57.7	-13.0	-44.7																								
<b>Mid Ch, 782</b>																																											
1564.00	-26.3	V	3.0	37.1	1.0	-64.4	-13.0	-51.4			1564.00	-26.1	V	3.0	37.1	1.0	-64.3	-13.0	-51.3																								
2346.00	-22.4	V	3.0	36.5	1.0	-57.9	-13.0	-44.9			2346.00	-25.8	V	3.0	36.5	1.0	-61.3	-13.0	-48.3																								
3128.00	-18.3	V	3.0	36.3	1.0	-53.5	-13.0	-40.5			3128.00	-19.5	V	3.0	36.3	1.0	-54.8	-13.0	-41.8																								
1564.00	-26.4	H	3.0	37.1	1.0	-62.5	-13.0	-49.5			1564.00	-26.1	H	3.0	37.1	1.0	-64.2	-13.0	-51.2																								
2346.00	-21.6	H	3.0	36.5	1.0	-57.1	-13.0	-44.1			2346.00	-24.5	H	3.0	36.5	1.0	-60.0	-13.0	-47.0																								
3128.00	-16.9	H	3.0	36.3	1.0	-54.2	-13.0	-41.2			3128.00	-21.2	H	3.0	36.3	1.0	-56.5	-13.0	-43.5																								
<b>High Ch, 784.5</b>																																											
1569.00	-30.1	V	3.0	37.1	1.0	-66.2	-13.0	-53.2			1569.00	-30.5	V	3.0	37.1	1.0	-66.7	-13.0	-53.7																								
2353.50	-23.1	V	3.0	36.5	1.0	-58.6	-13.0	-45.6			2353.50	-23.1	V	3.0	36.5	1.0	-58.6	-13.0	-45.6																								
3138.00	-21.9	V	3.0	36.3	1.0	-57.1	-13.0	-44.1			3138.00	-22.8	V	3.0	36.3	1.0	-58.1	-13.0	-45.1																								
1569.00	-28.9	H	3.0	37.1	1.0	-65.0	-13.0	-52.0			1569.00	-28.7	H	3.0	37.1	1.0	-64.8	-13.0	-51.8																								
2353.50	-23.2	H	3.0	36.5	1.0	-58.7	-13.0	-45.7			2353.50	-24.0	H	3.0	36.5	1.0	-59.5	-13.0	-46.5																								
3138.00	-20.2	H	3.0	36.3	1.0	-55.5	-13.0	-42.5			3138.00	-21.6	H	3.0	36.3	1.0	-56.8	-13.0	-43.8																								
<b>10MHz QPSK</b>																						<b>10MHz 16QAM</b>																					
UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement											UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement																																
Company:		LG Electronics									Company:		LG Electronics																														
Project #:		1622653									Project #:		1622653																														
Date:		1/21/2016									Date:		1/21/2016																														
Test Engineer:		Lieu Nguyen									Test Engineer:		Lieu Nguyen																														
Configuration:		EUT + AC Adapter									Configuration:		EUT + AC Adapter																														
Location:		Chamber C									Location:		Chamber C																														
Mode:		LTE_QPSK Band 13 Harmonics, 10MHz Bandwidth									Mode:		LTE_16QAM Band 13 Harmonics, 10MHz Bandwidth																														
f	SG reading	Ant. Pol.	Distance	Preamp	Filter	ERP	Limit	Delta	Notes		f	SG reading	Ant. Pol.	Distance	Preamp	Filter	ERP	Limit	Delta	Notes																							
MHz	(dBm)	(HV)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)			MHz	(dBm)	(HV)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)																								
<b>Mid Ch, 782</b>																																											
1564.00	-22.4	V	3.0	37.1	1.0	-58.6	-13.0	-45.6			1564.00	-22.7	V	3.0	37.1	1.0	-58.9	-13.0	-45.9																								
2346.00	-19.9	V	3.0	36.5	1.0	-55.3	-13.0	-42.3			2346.00	-20.1	V	3.0	36.5	1.0	-55.6	-13.0	-42.6																								
3128.00	-14.1	V	3.0	36.3	1.0	-49.4	-13.0	-36.4			3128.00	-14.5	V	3.0	36.3	1.0	-49.8	-13.0	-36.8																								
1564.00	-22.3	H	3.0	37.1	1.0	-58.4	-13.0	-45.4			1564.00	-22.6	H	3.0	37.1	1.0	-58.7	-13.0	-45.7																								
2346.00	-19.3	H	3.0	36.5	1.0	-54.8	-13.0	-41.8			2346.00	-19.4	H	3.0	36.5	1.0	-54.9	-13.0	-41.9																								
3128.00	-15.3	H	3.0	36.3	1.0	-50.5	-13.0	-37.5			3128.00	-15.7	H	3.0	36.3	1.0	-51.0	-13.0	-38.0																								