



**FCC CFR47 PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 8**

CERTIFICATION TEST REPORT

FOR

GSM & W-CDMA Phone + BT

MODEL NUMBER: LG440G

FCC ID: ZNFLG440G

REPORT NUMBER: 12U14353-1, Revision B

ISSUE DATE: MAY 16, 2012

Prepared for
**LG ELECTRONICS MOBILECOMM U.S.A., INC.
1000 SYLVAN AVE.
ENGLEWOOD CLIFFS, NJ 07632**

Prepared by
**COMPLIANCE CERTIFICATION SERVICES (UL CCS)
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	05/07/2012	Initial Issue	T. LEE
A	05/15/12	Updated Client address	A. Zaffar
B	05/16/12	Updated EUT description	A. Zaffar

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION.....	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. MEASURING INSTRUMENT CALIBRATION	5
4.2. SAMPLE CALCULATION.....	5
4.3. MEASUREMENT UNCERTAINTY	5
5. EQUIPMENT UNDER TEST	6
5.1. DESCRIPTION OF EUT.....	6
5.2. MAXIMUM OUTPUT POWER.....	6
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	6
5.4. SOFTWARE AND FIRMWARE	6
5.5. WORST-CASE CONFIGURATION AND MODE.....	7
5.6. DESCRIPTION OF TEST SETUP.....	8
6. TEST AND MEASUREMENT EQUIPMENT	10
7. ANTENNA PORT TEST RESULTS	11
7.1. BASIC DATA RATE GFSK MODULATION.....	11
7.1.1. 20 dB AND 99% BANDWIDTH	11
7.1.2. HOPPING FREQUENCY SEPARATION	18
7.1.3. NUMBER OF HOPPING CHANNELS.....	20
7.1.4. AVERAGE TIME OF OCCUPANCY	25
7.1.5. OUTPUT POWER	32
7.1.6. AVERAGE POWER	36
7.1.7. CONDUCTED SPURIOUS EMISSIONS.....	37
7.2. ENHANCED DATA RATE 8PSK MODULATION	46
7.2.1. 20 dB AND 99% BANDWIDTH	46
7.2.2. HOPPING FREQUENCY SEPARATION	53
7.2.3. NUMBER OF HOPPING CHANNELS.....	55
7.2.4. AVERAGE TIME OF OCCUPANCY	60
7.2.5. OUTPUT POWER	67
7.2.6. AVERAGE POWER	71
7.2.7. CONDUCTED SPURIOUS EMISSIONS.....	72
7.2.8. BASIC DATA RATE GFSK MODULATION.....	81
7.2.9. ENHANCED DATA RATE 8PSK MODULATION	90
7.3. WORST-CASE BELOW 1 GHz	99
8. AC POWER LINE CONDUCTED EMISSIONS.....	102
9. SETUP PHOTOS.....	106

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: LG ELECTRONICS MOBILECOMM U.S.A., INC.
1000 SYLVAN AVE.
ENGLEWOOD CLIFFS, NJ 07632

EUT DESCRIPTION: GSM & W-CDMA Phone + BT

MODEL: LG440G

SERIAL NUMBER: 203KPUU163102, 203KPKN163101

DATE TESTED: APRIL 5 – MAY 5, 2012

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

Compliance Certification Services (UL CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For UL CCS By:

Tested By:



TIM LEE
STAFF ENGINEER
UL CCS

TOM CHEN
EMC ENGINEER
UL CCS

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 3, and RSS-210 Issue 8.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM & W-CDMA Phone + BT

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	Basic GFSK	9.96	9.91
2402 - 2480	Enhanced 8PSK	10.07	10.16

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PIFA antenna, with a maximum gain of 3.65 dBi.

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing KERNAL version 3.0.8

The test utility software used during testing was LA89601R120414A

5.5. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

Worst-case data rates as provided by the client were:

Based on the baseline scan, the worst-case data rates were:

GFSK DH5 mode
QPSK 2-DH5 mode
8PSK 3-DH5 mode

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT


Support Equipment List			
Description	Manufacturer	Model	Serial Number
AC ADAPTER	LG ELECTRONICS	MCS-01WR	RA1Z0051473

I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC	1	MINI USB	UN-SHELED	1.0m	LG-DLC300 (BA21)

TEST SETUP

SETUP DIAGRAM FOR TESTS

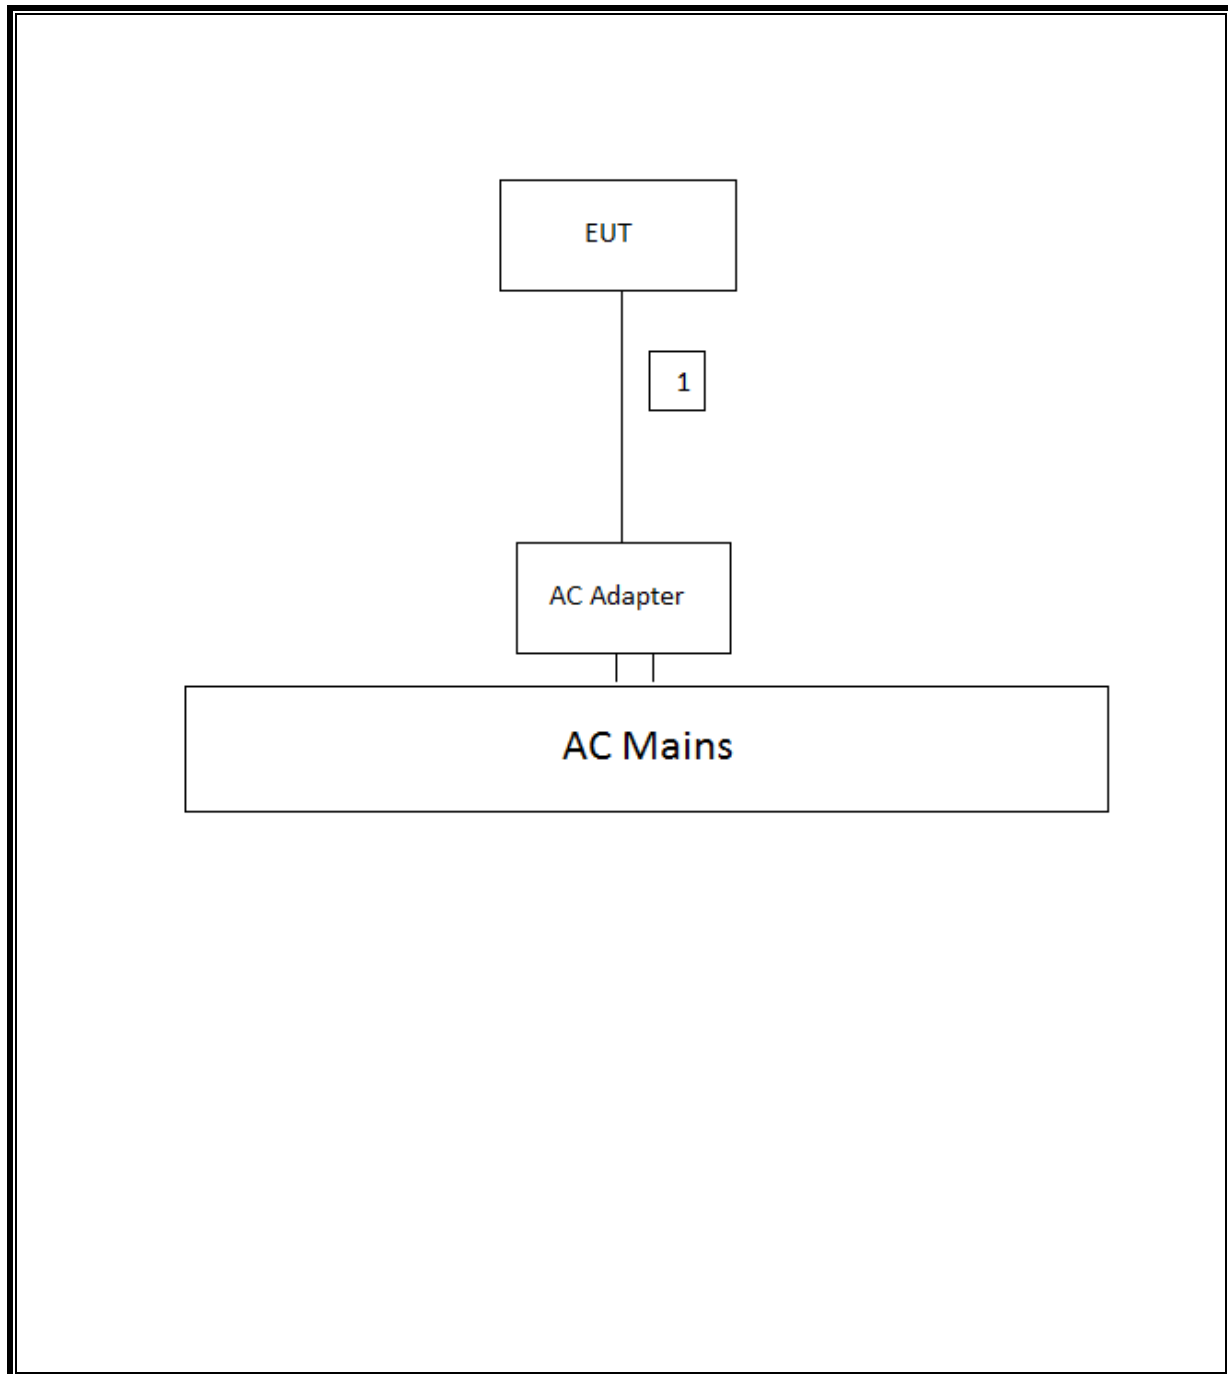

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01052	07/14/12
Antenna, Horn, 18 GHz	EMCO	3115	C00945	06/29/12
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00580	11/11/12
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01016	07/12/12
Horn Antenna, 26.5 GHz	ARA	MWH-1826/B	C00589	07/28/12
Horn Antenna, 40 GHz	ARA	MWH-2640/B	C00981	06/14/12
Preamplifier, 40 GHz	Miteq	NSP4000-SP2	C00990	03/14/13
Reject Filter, 2.0-2.9 GHz	Micro-Tronics	BRM50702	N02684	CNR
High Pass Filter, 7.6 GHz	Micro-Tronics	HPM13195	N02682	CNR
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01159	04/09/13
Peak Power Meter	Agilent	N1911A	1260847C	08/04/12
Peak Power Sensor	Agilent	E9323A	1244073F	08/04/12
Reject Filter, 5.725-5.825 GHz	Micro-Tronics	BRC13192	N02676	CNR
Reject Filter, 2.4-2.5 GHz	Micro-Tronics	BRM50702	N02685	CNR
Highpass Filter, 7.6 GHz	Micro-Tronics	HPM13195	N02682	CNR
EMI Test Receiver, 30MHz	R & S	ESHS 20	N02396	08/19/13
LISN, 30 MHz	FCC	LISN-50/250-25-2	N02625	12/13/12

7. ANTENNA PORT TEST RESULTS

7.1. BASIC DATA RATE GFSK MODULATION

7.1.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to $\geq$ RBW. The sweep time is coupled.


RESULTS

Channel	Frequency (MHz)	20 dB Bandwidth (kHz)	99% Bandwidth (kHz)
Low	2402	928.298	870.6885
Middle	2441	925.785	894.8859
High	2480	933.268	882.5364


20 dB BANDWIDTH

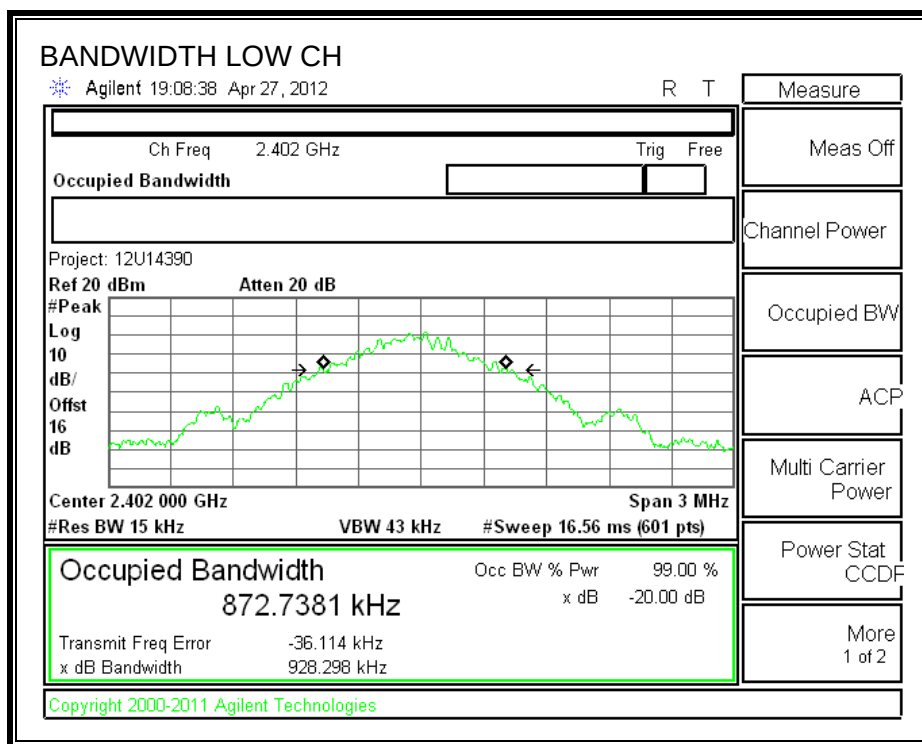


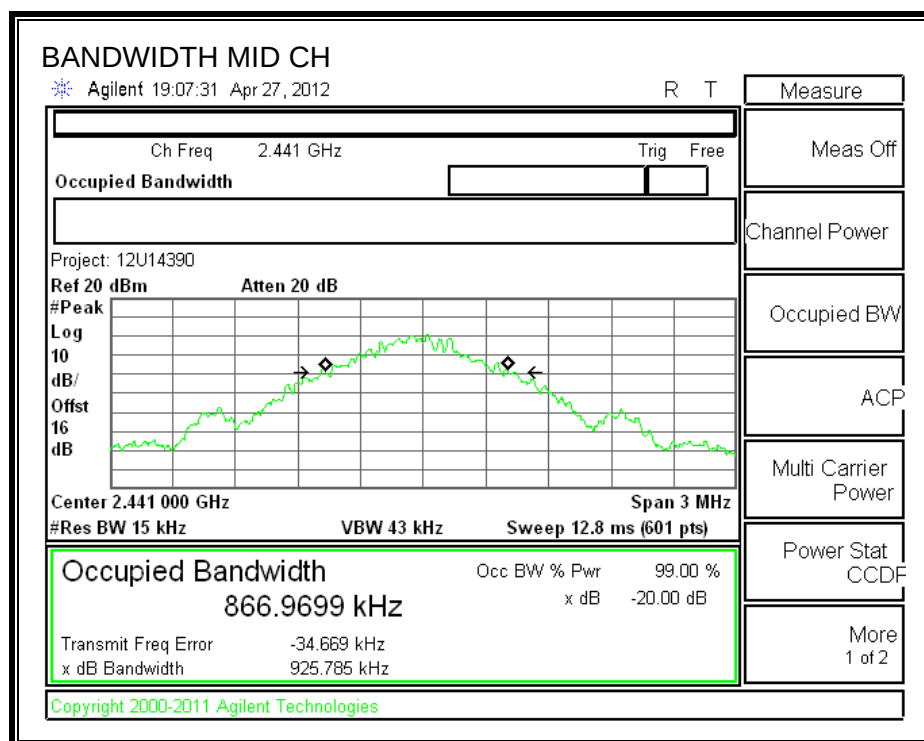


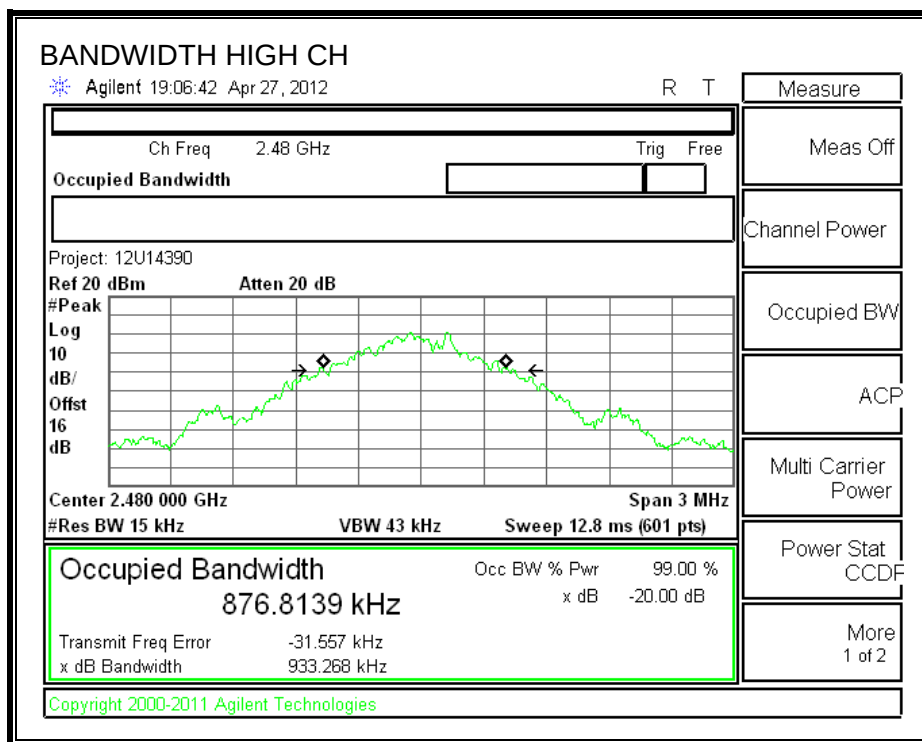

99% BANDWIDTH

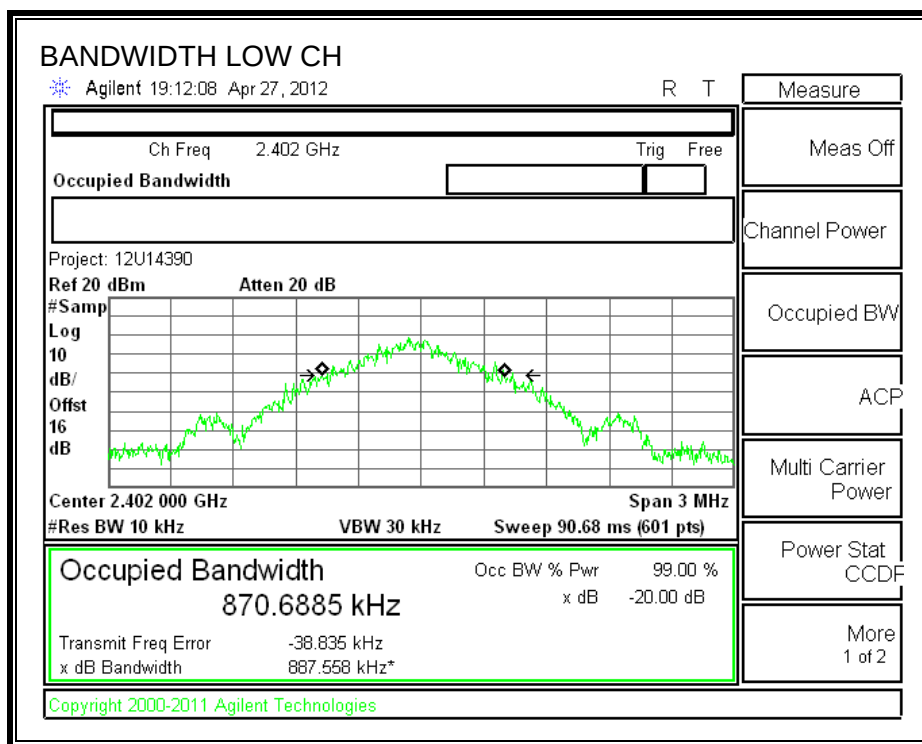

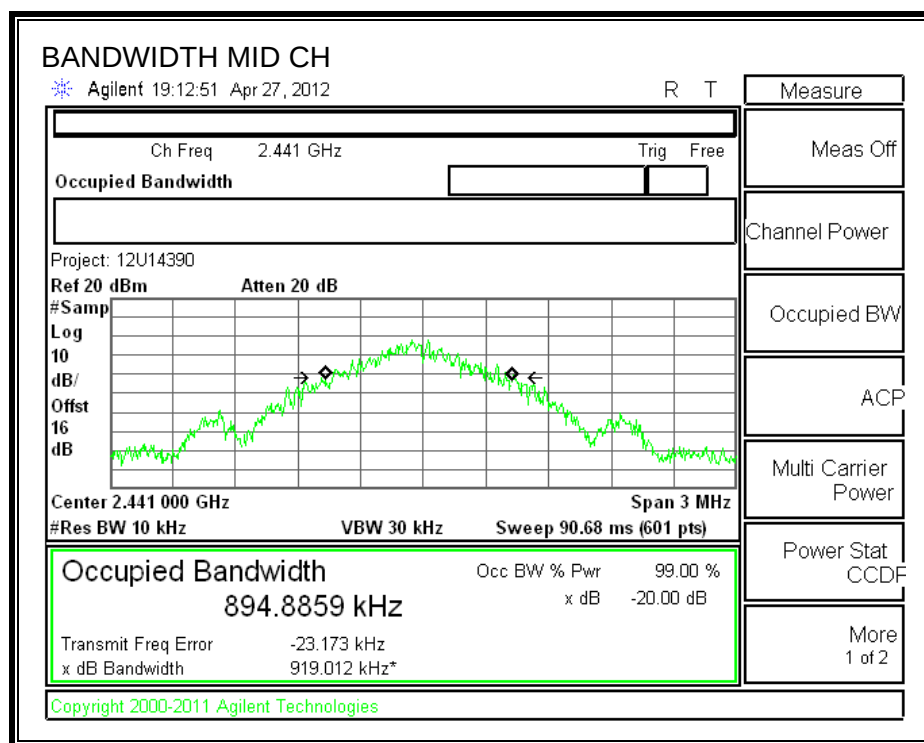

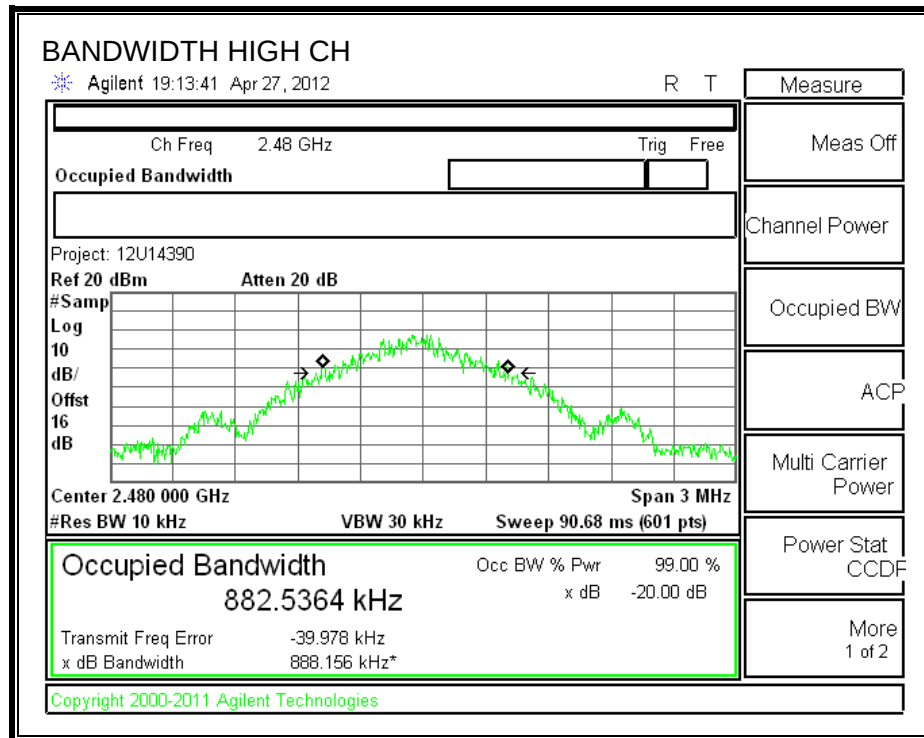

7.1.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION

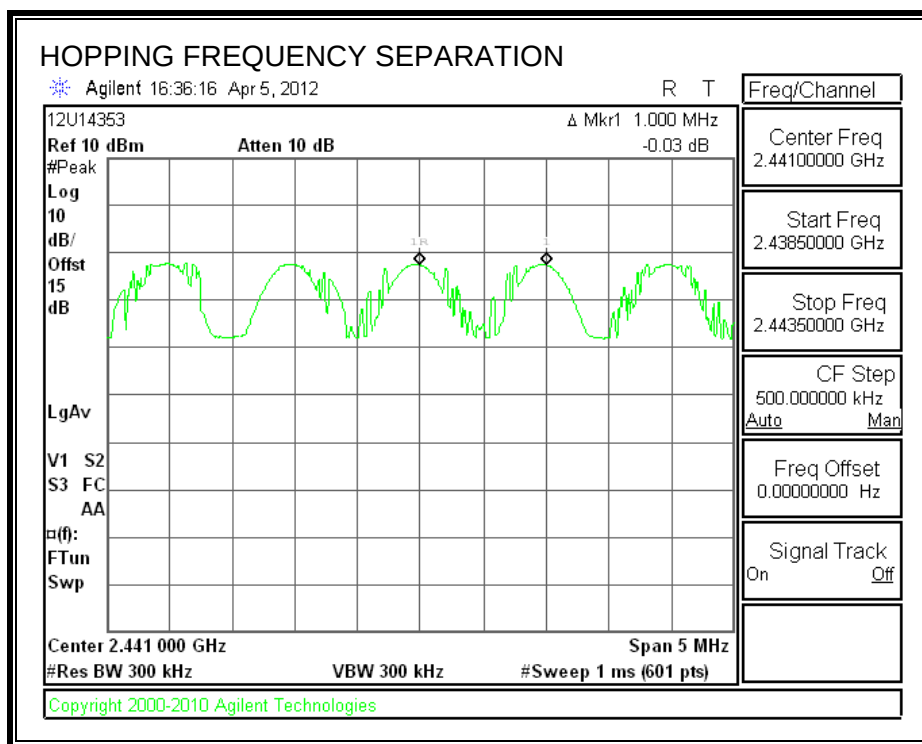

7.1.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.


RESULTS


79 Channels observed.

NUMBER OF HOPPING CHANNELS

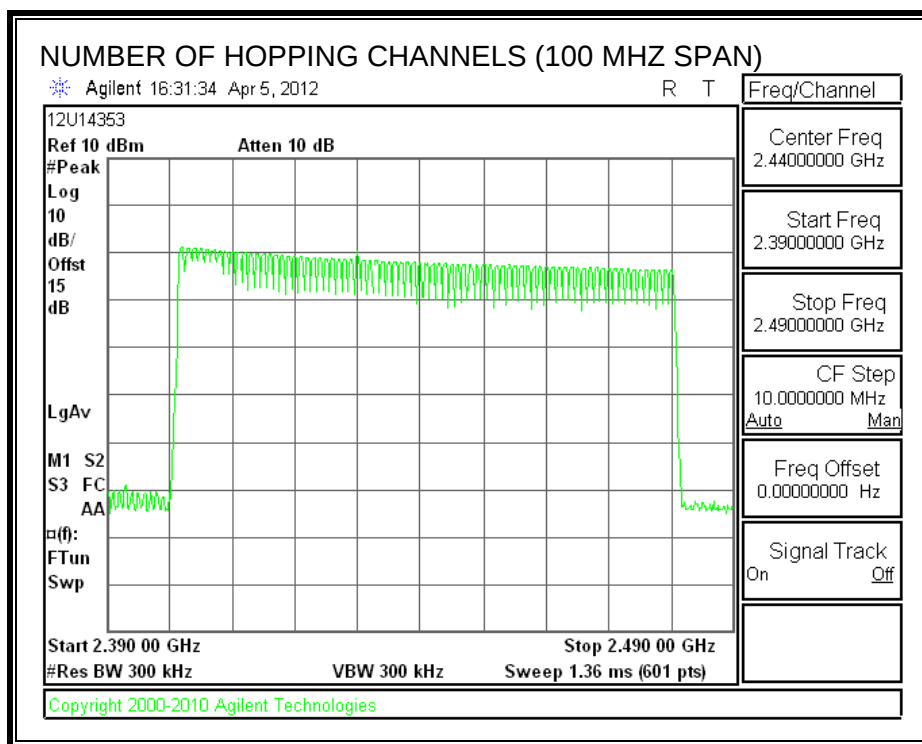

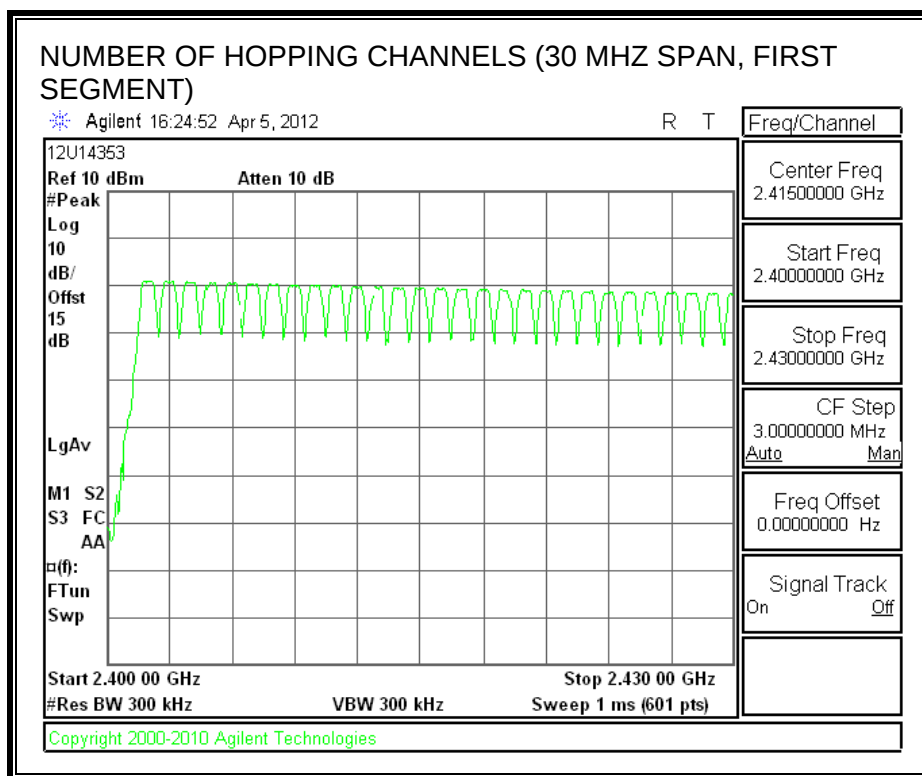

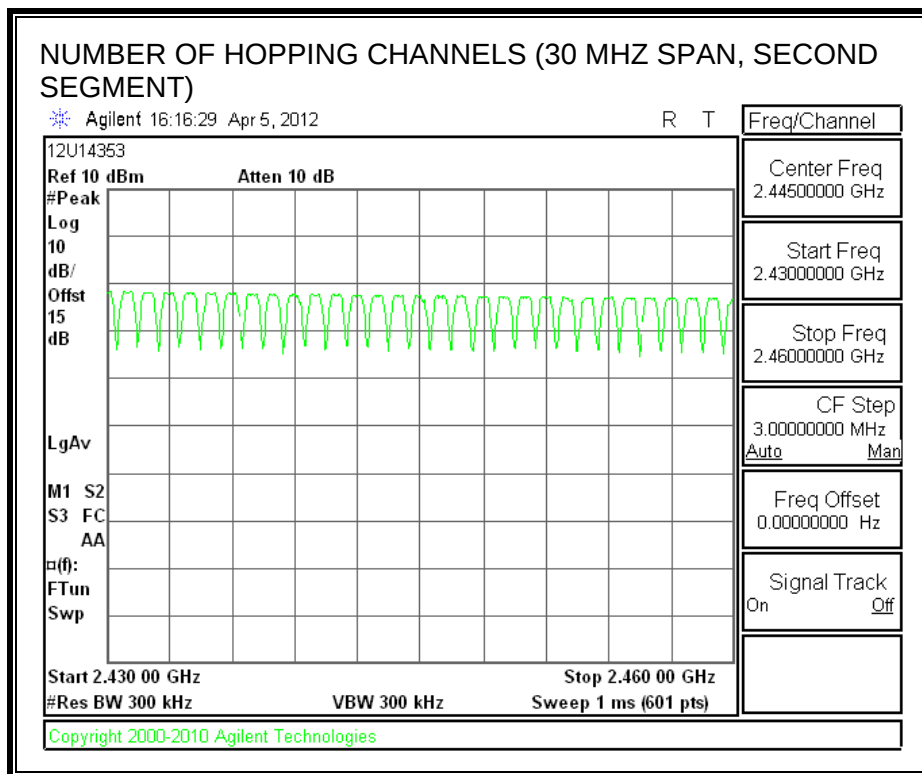

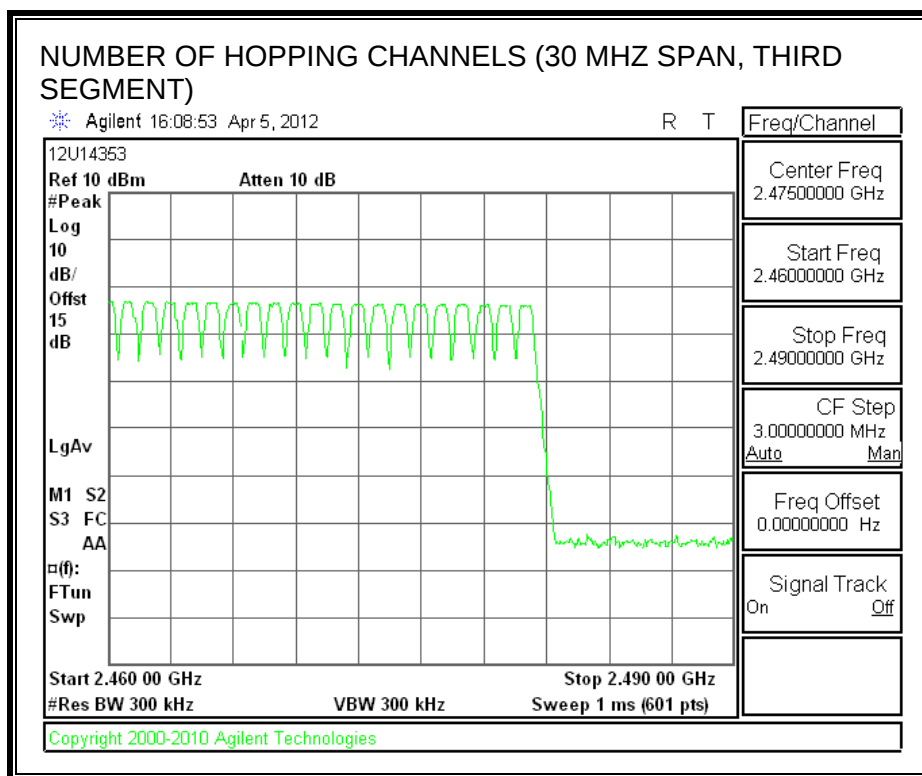

7.1.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.


RESULTS

Time Of Occupancy = $10 * xx \text{ pulses} * yy \text{ msec} = zz \text{ msec}$


GFSK Mode

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of (sec)	Limit (sec)	Margin (sec)
DH1	0.3833	32	0.123	0.4	-0.277
DH3	1.642	14	0.230	0.4	-0.170
DH5	2.867	12	0.344	0.4	-0.056


PULSE WIDTH - DH1

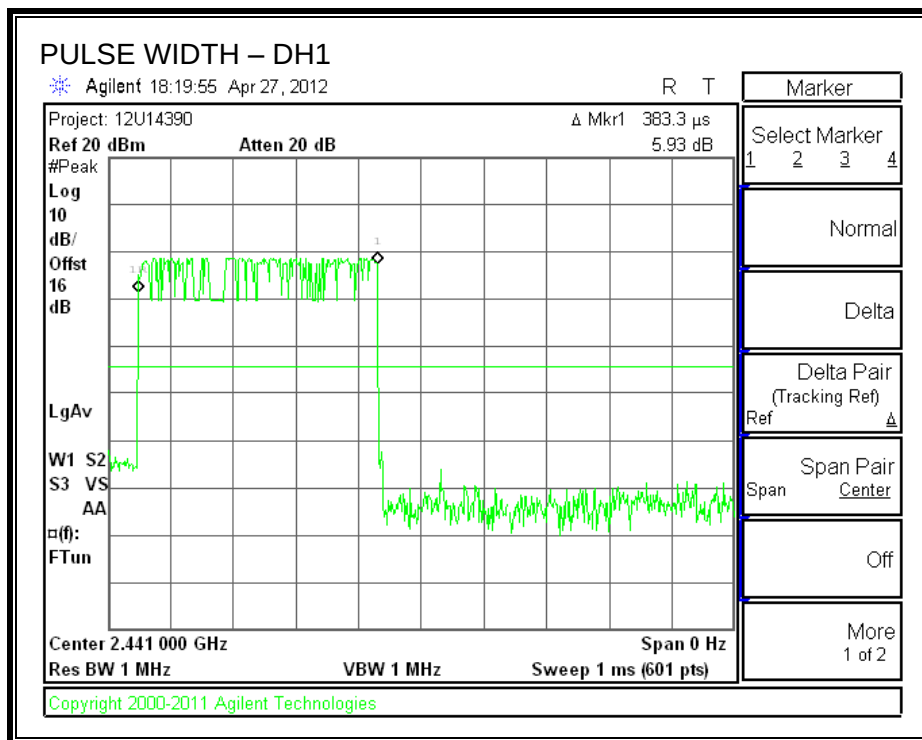


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH1

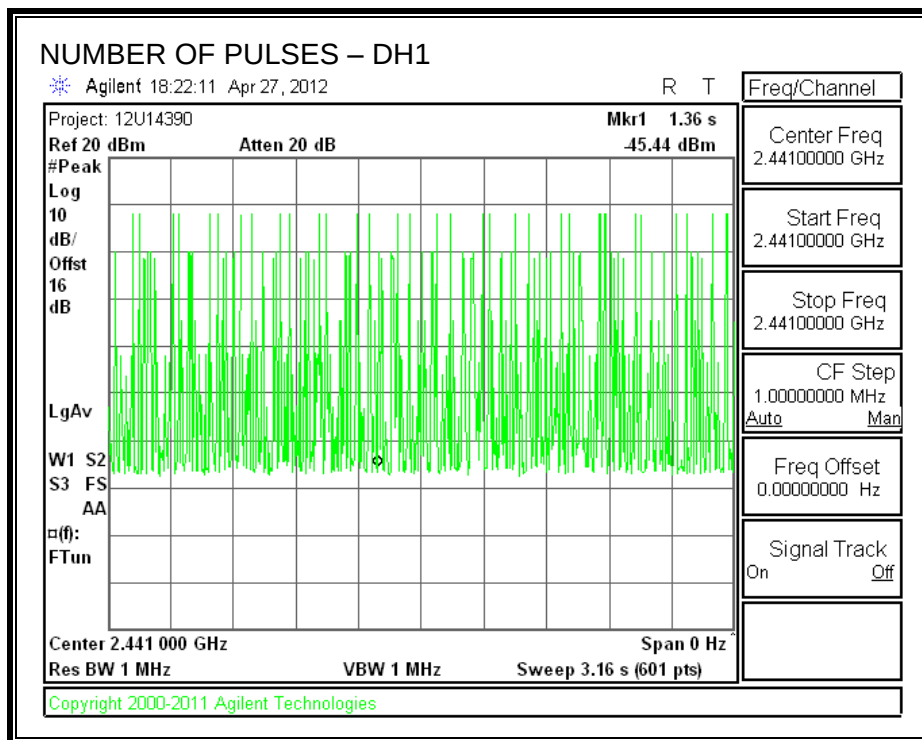


PULSE WIDTH – DH3

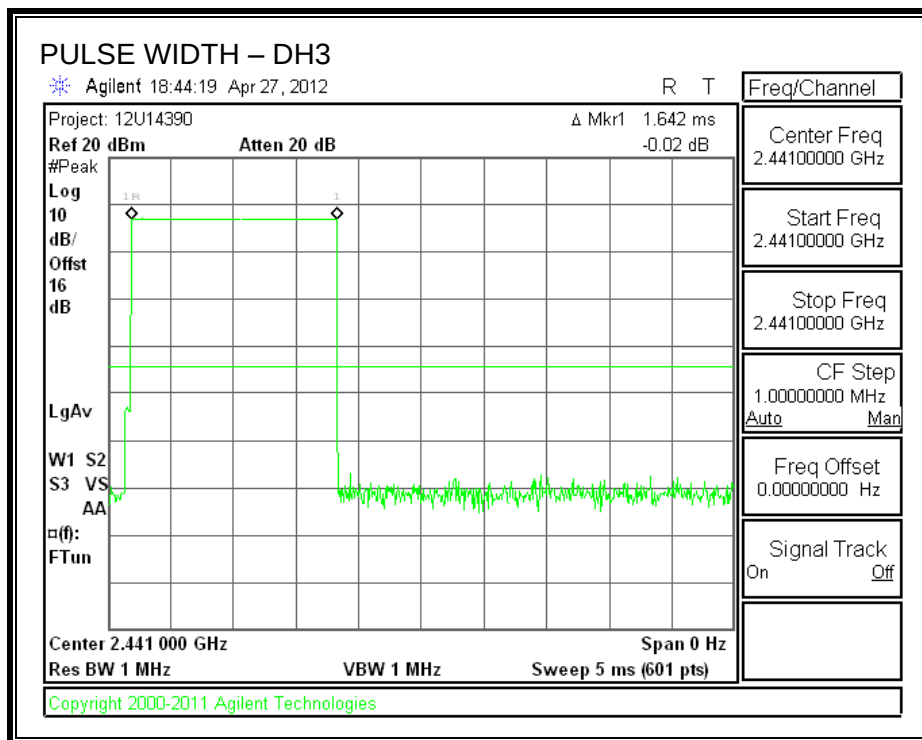


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH3

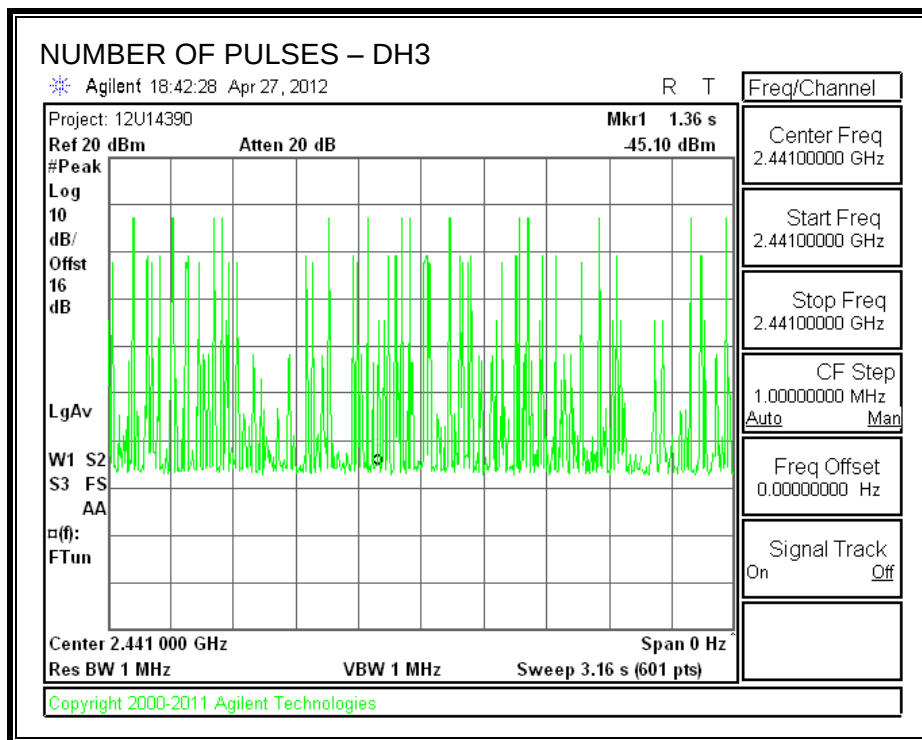

PULSE WIDTH – DH5

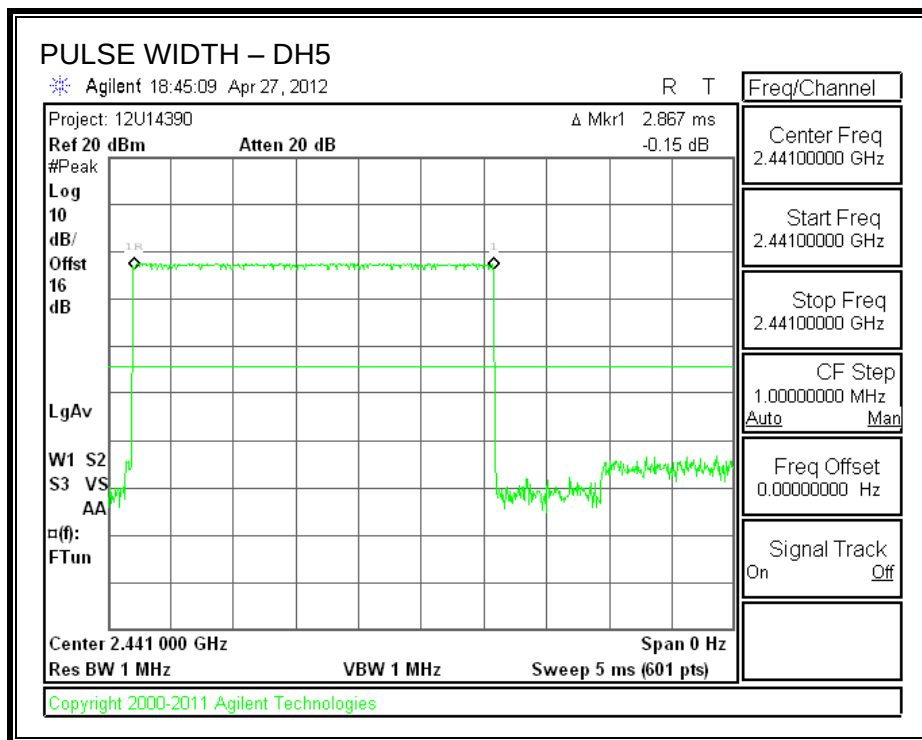

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH5

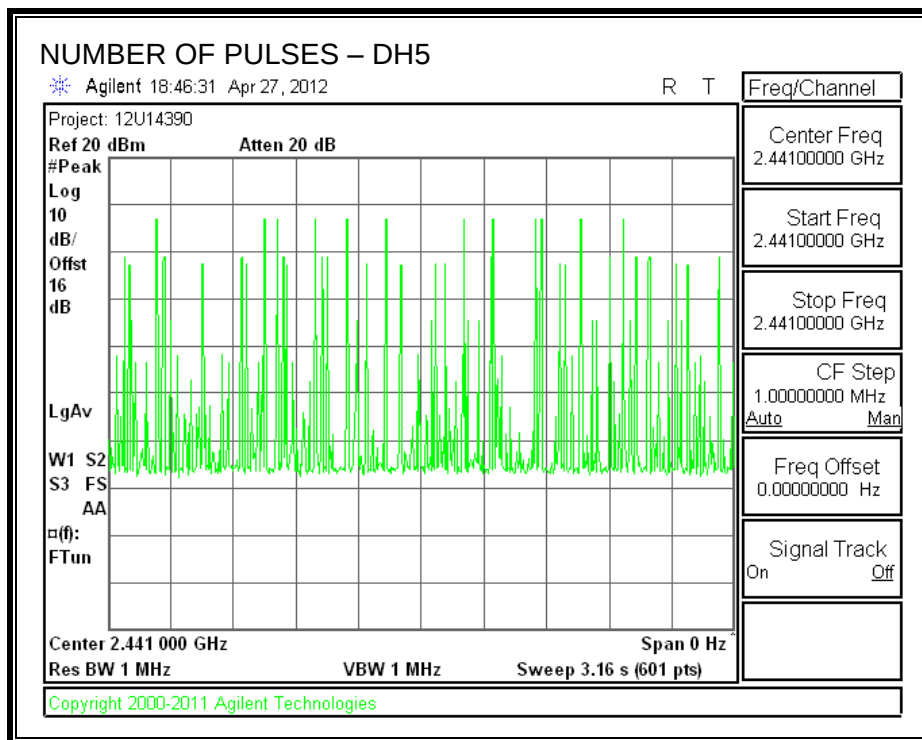

7.1.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.


RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	8.78	30	-21.22
Middle	2441	9.81	30	-20.19
High	2480	9.96	30	-20.04

OUTPUT POWER

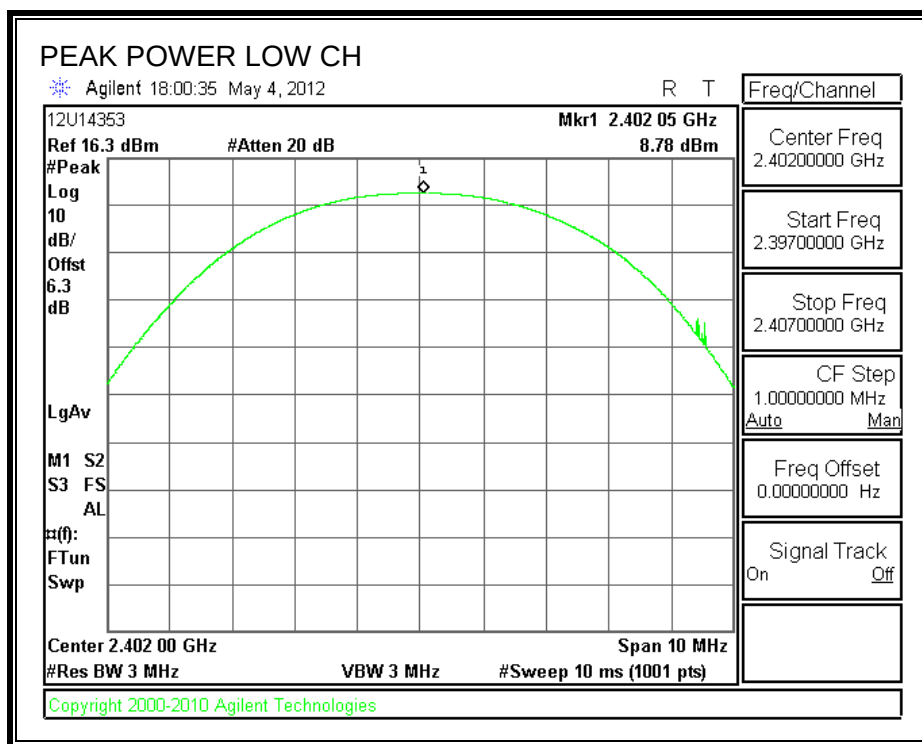

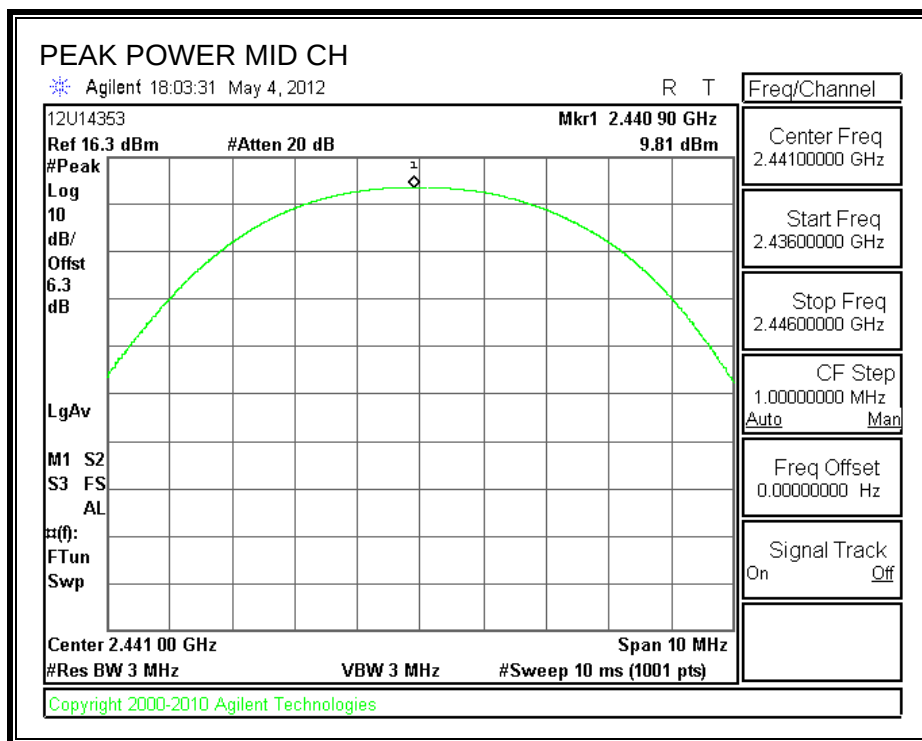

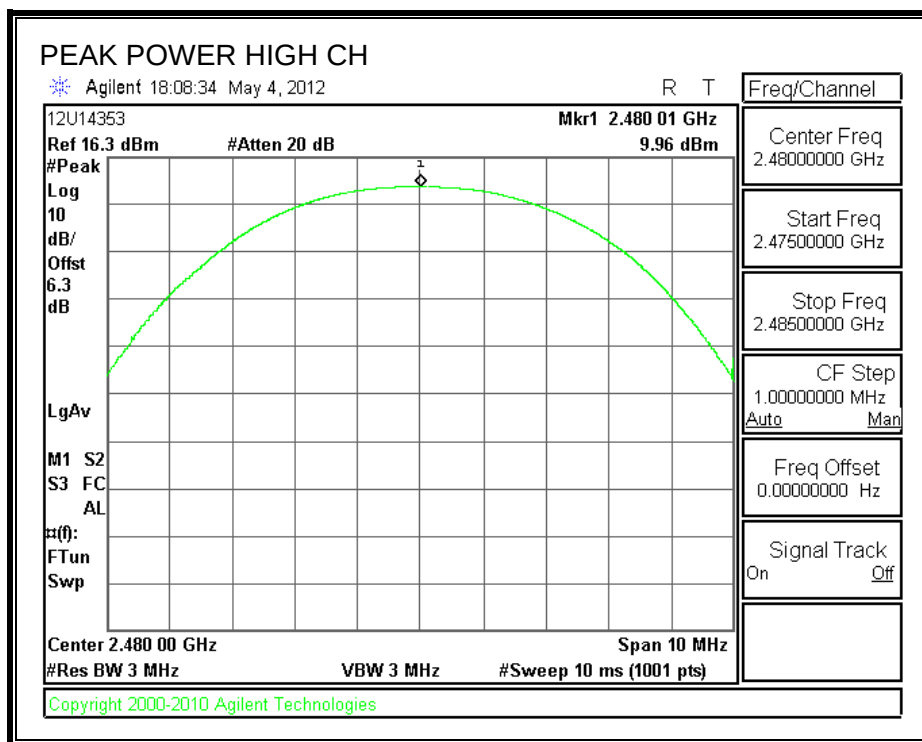

7.1.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 0.88 dB (including 0 dB pad and 0.88 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	8.60
Middle	2441	9.10
High	2480	9.00

7.1.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.


RESULTS


SPURIOUS EMISSIONS, LOW CHANNEL

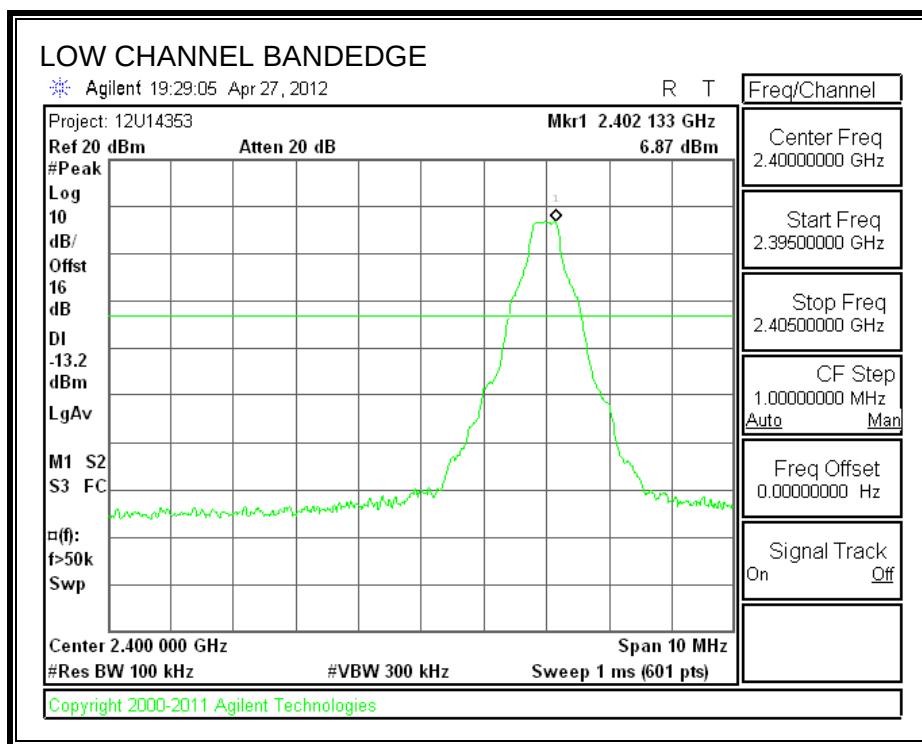

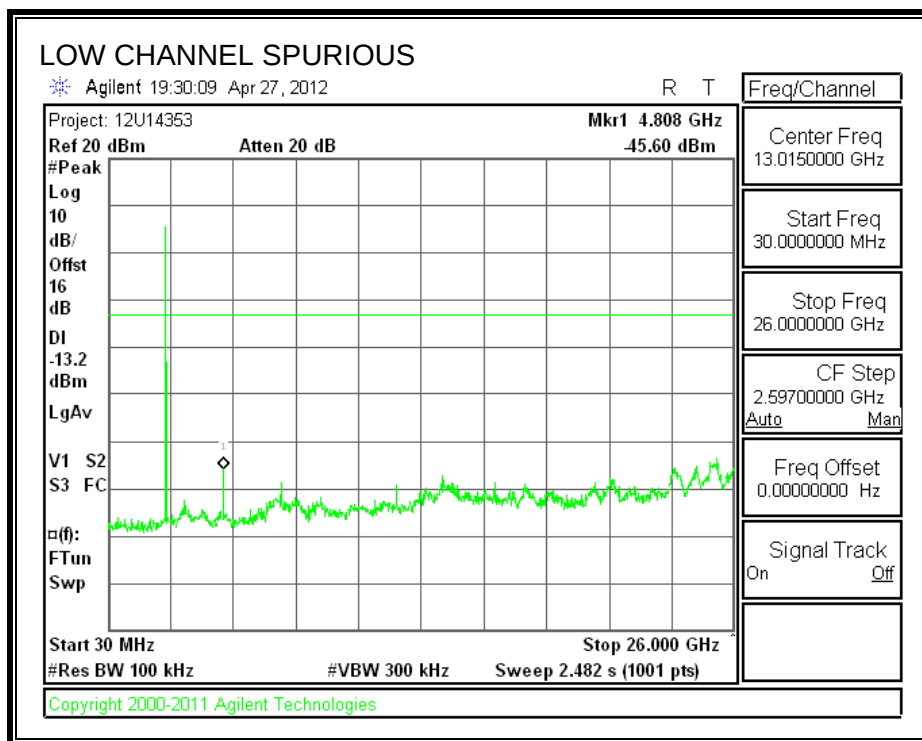



SPURIOUS EMISSIONS, MID CHANNEL

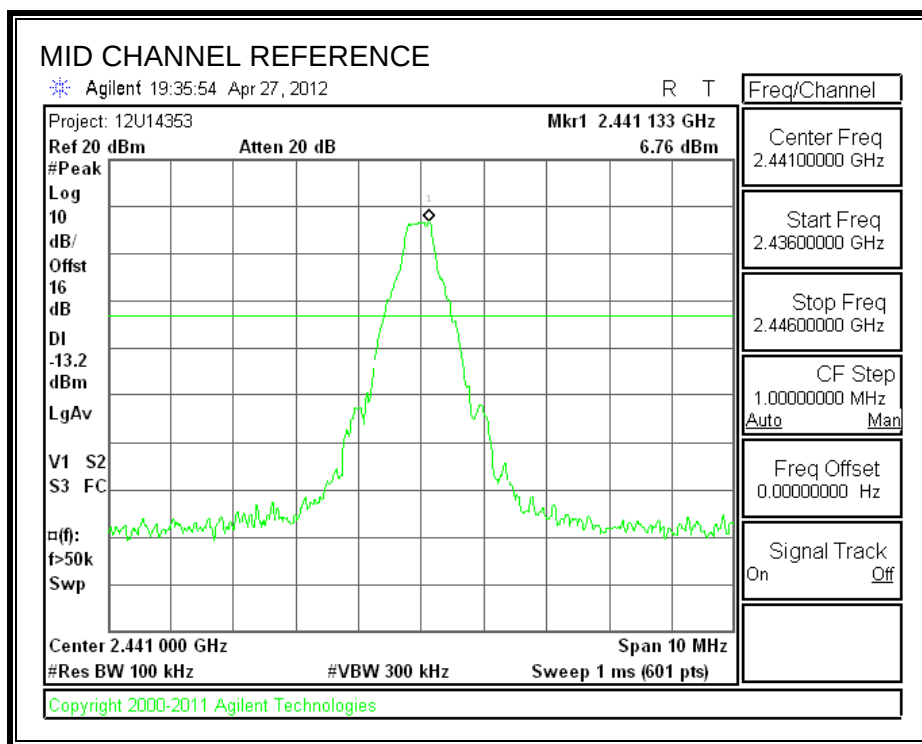

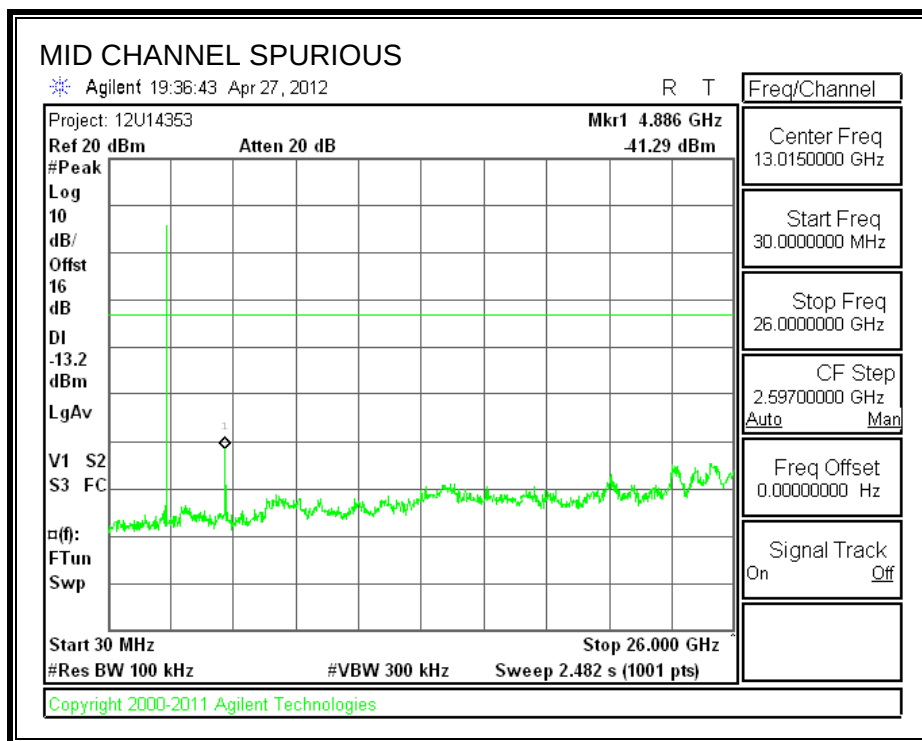



SPURIOUS EMISSIONS, HIGH CHANNEL

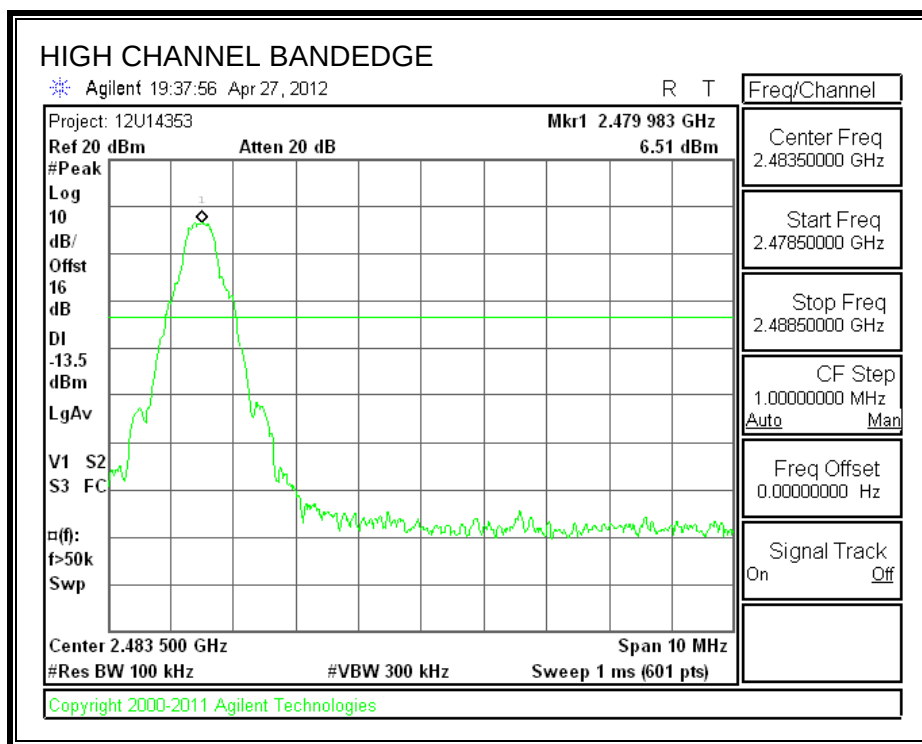

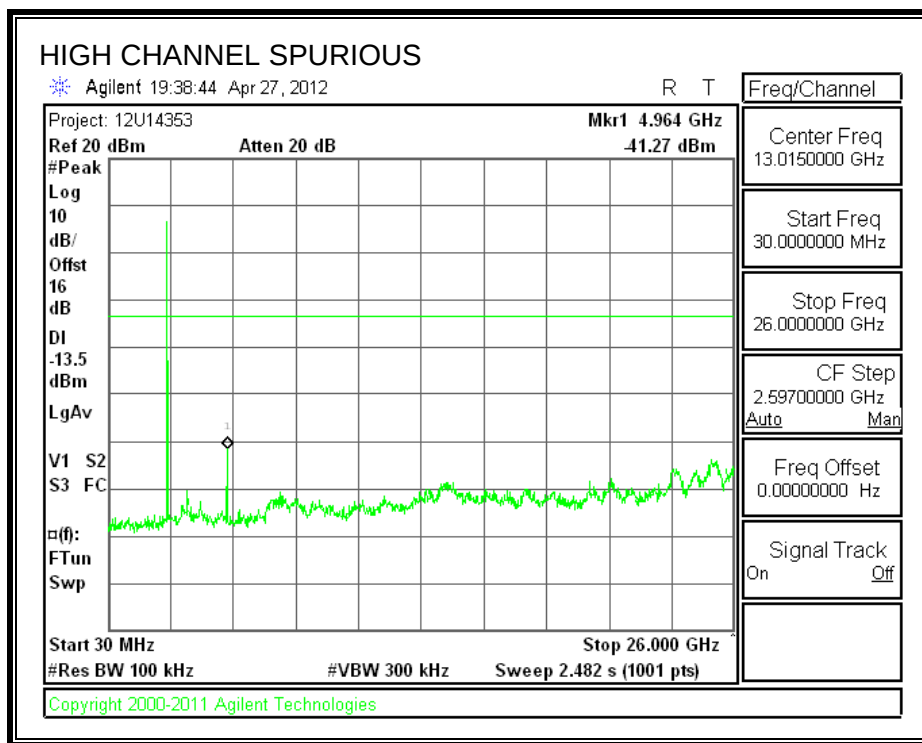

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

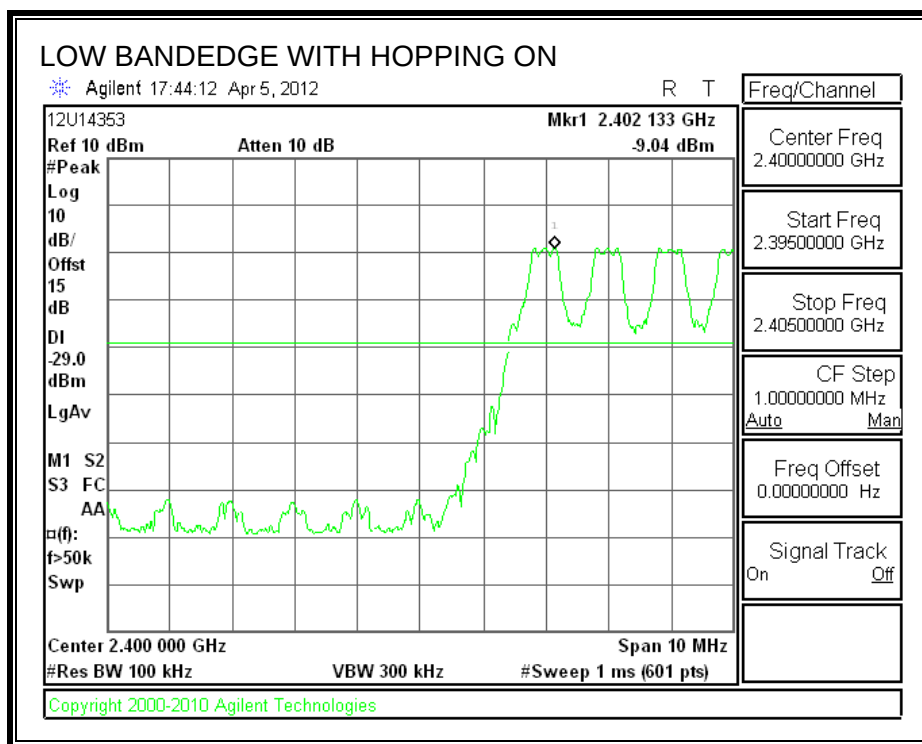

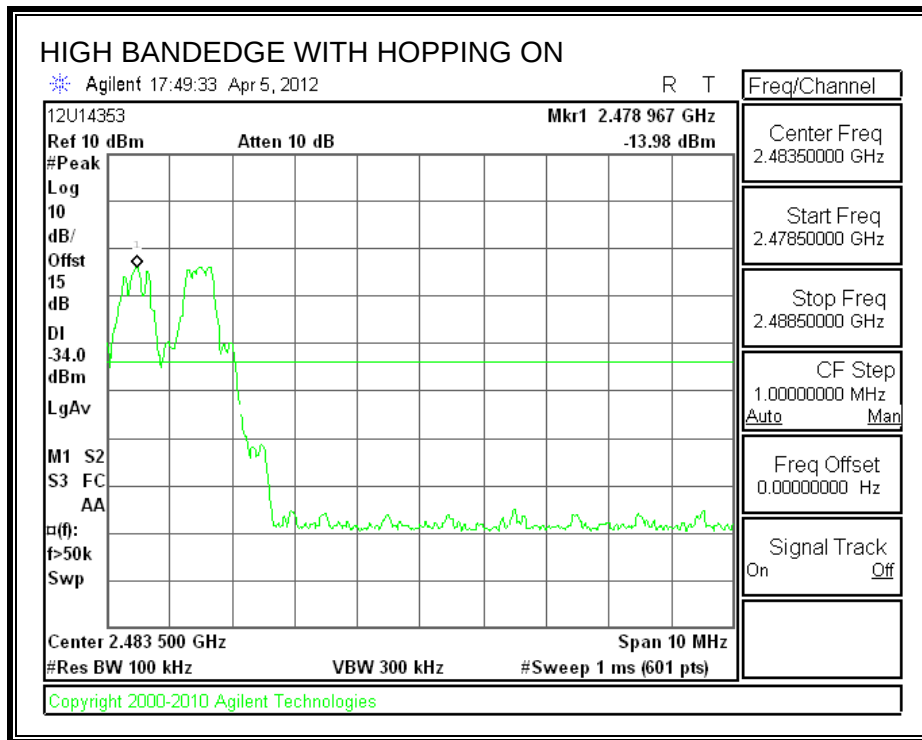

7.2. ENHANCED DATA RATE 8PSK MODULATION

7.2.1. 20 dB AND 99% BANDWIDTH

LIMIT

None; for reporting purposes only.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to $\geq$ RBW. The sweep time is coupled.


RESULTS

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.294	1.1965
Middle	2441	1.308	1.1987
High	2480	1.312	1.1975


20 dB BANDWIDTH

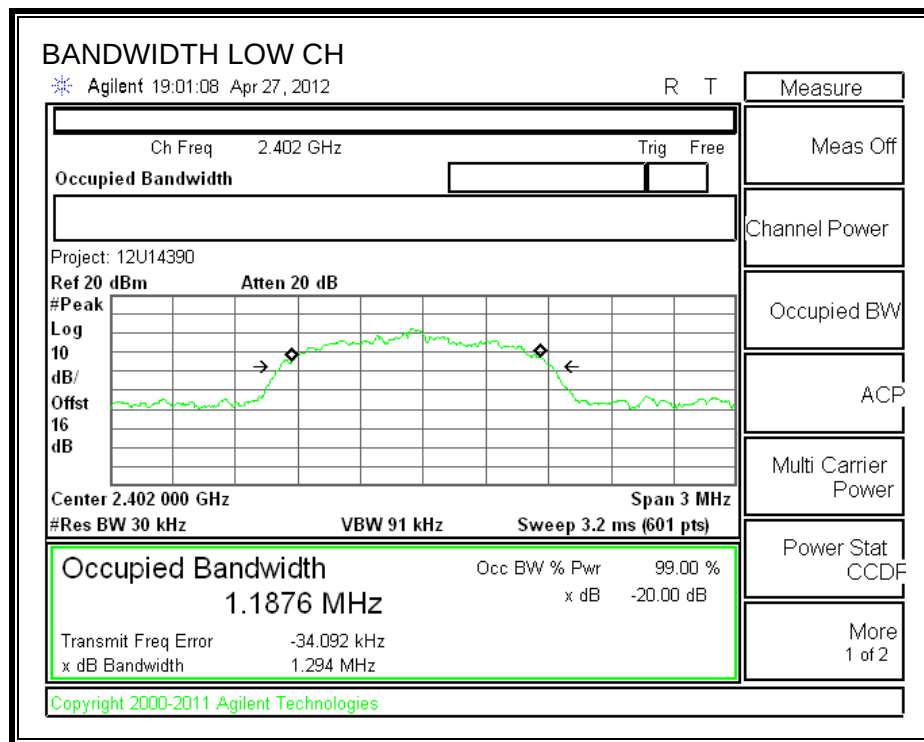


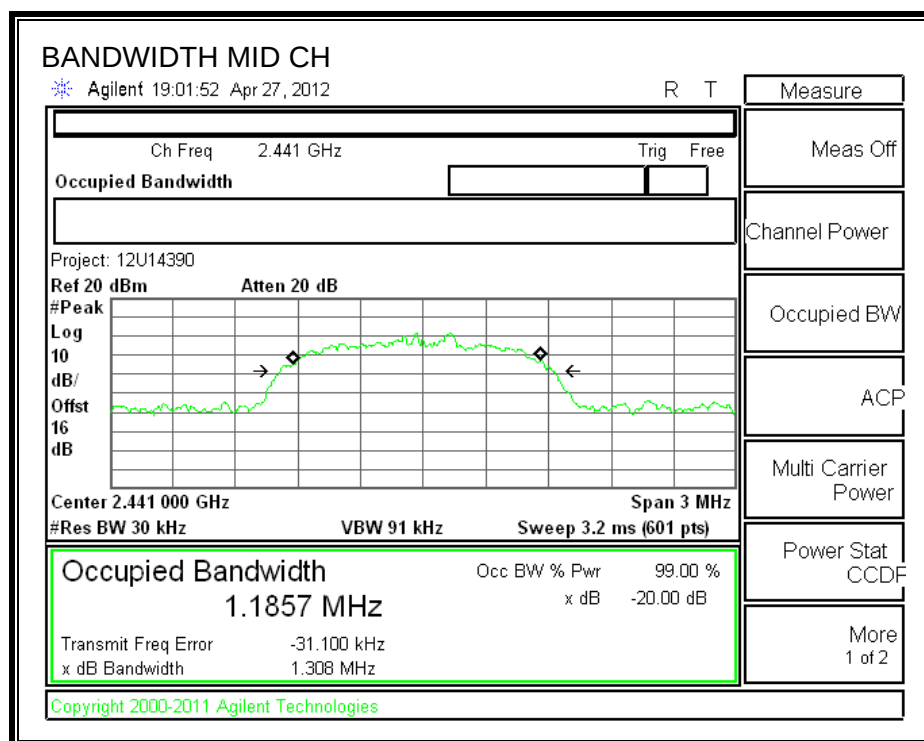


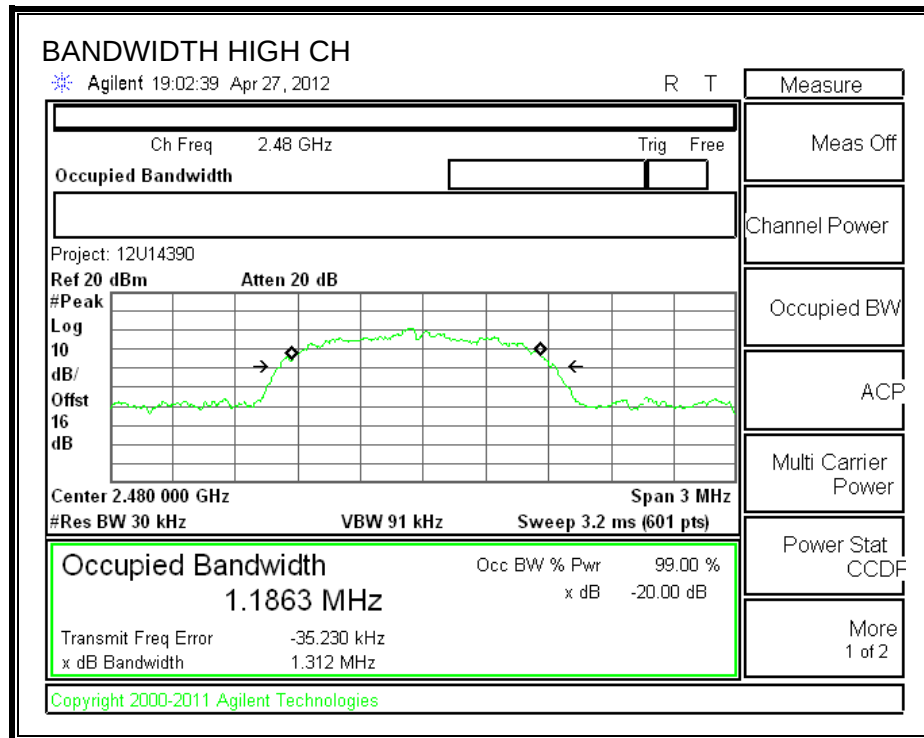

99% BANDWIDTH

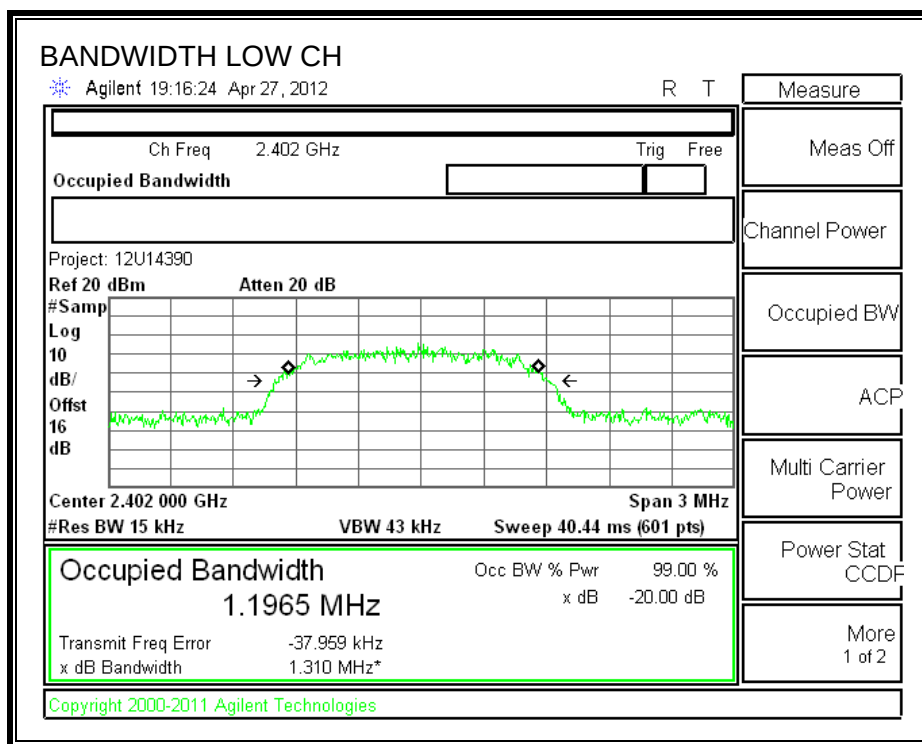

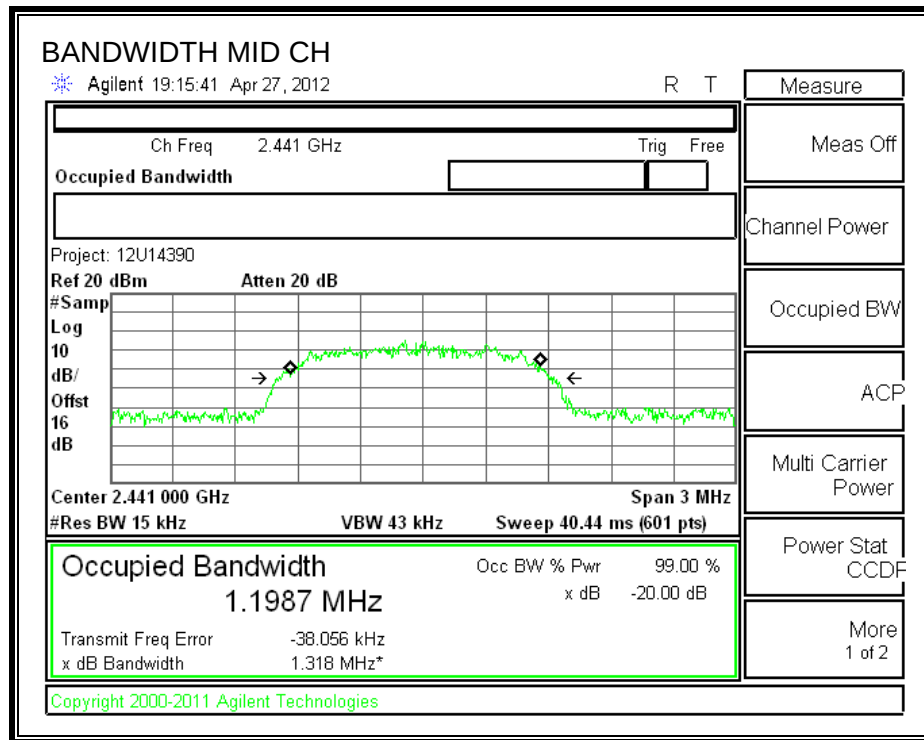

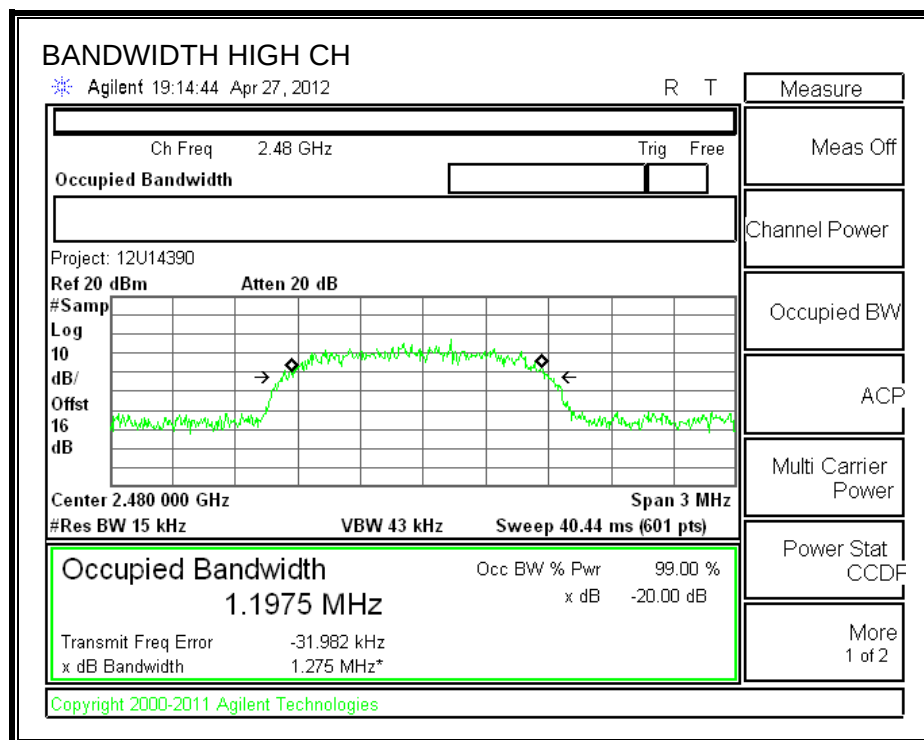

7.2.2. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION

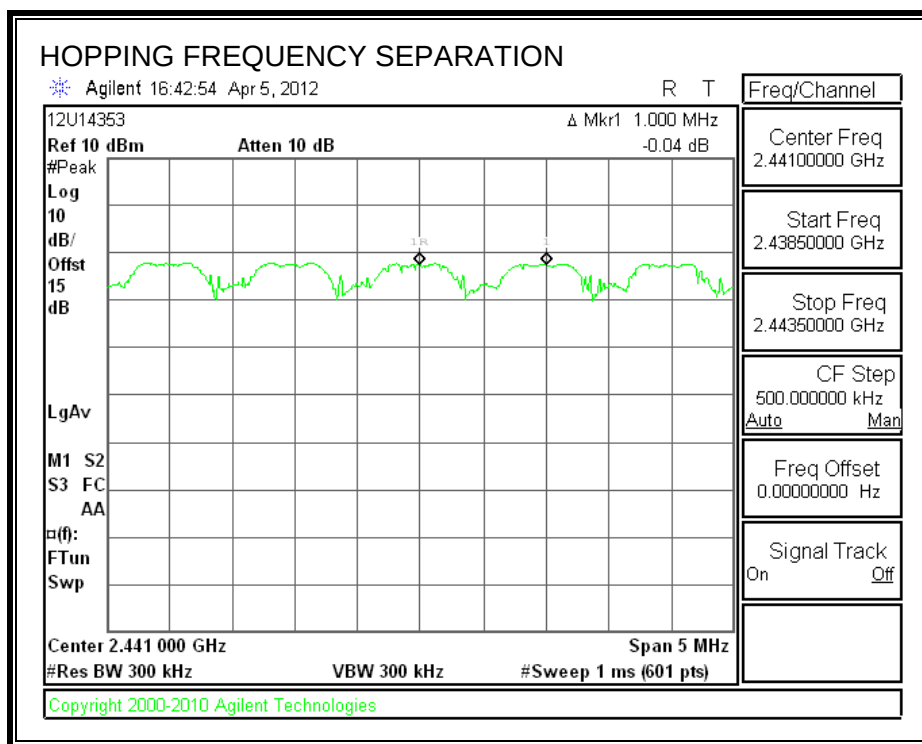

7.2.3. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.


RESULTS


79 Channels observed.

NUMBER OF HOPPING CHANNELS

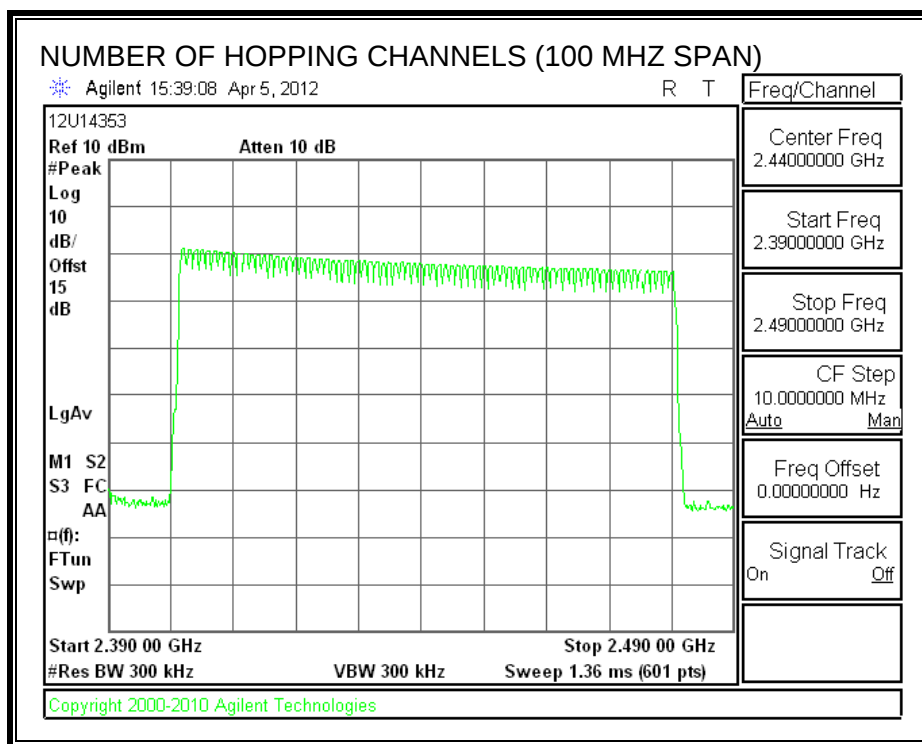

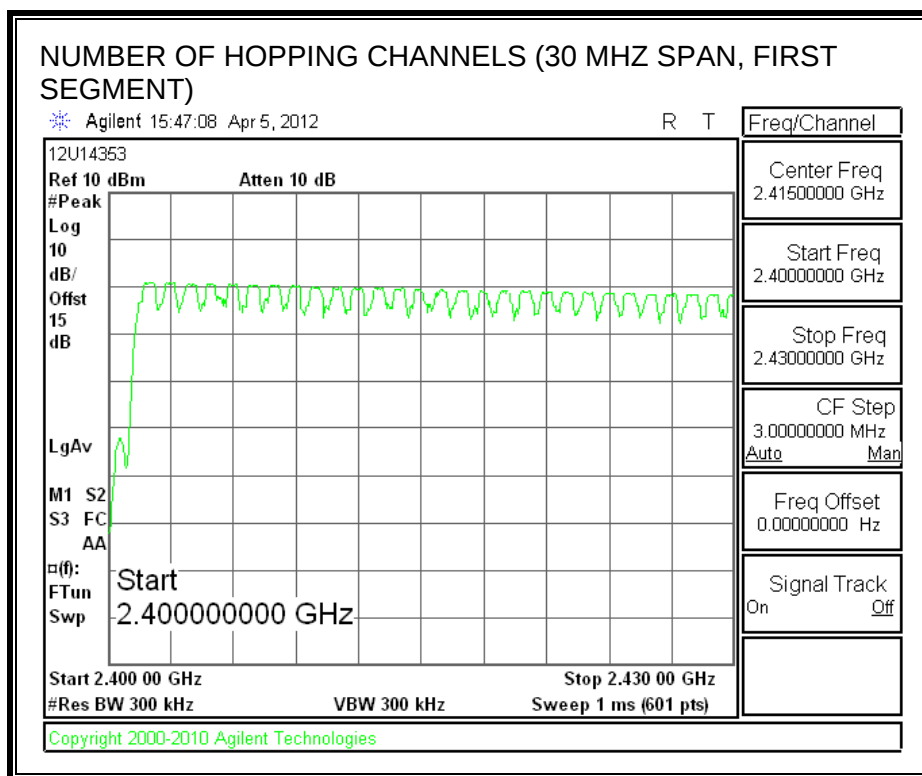

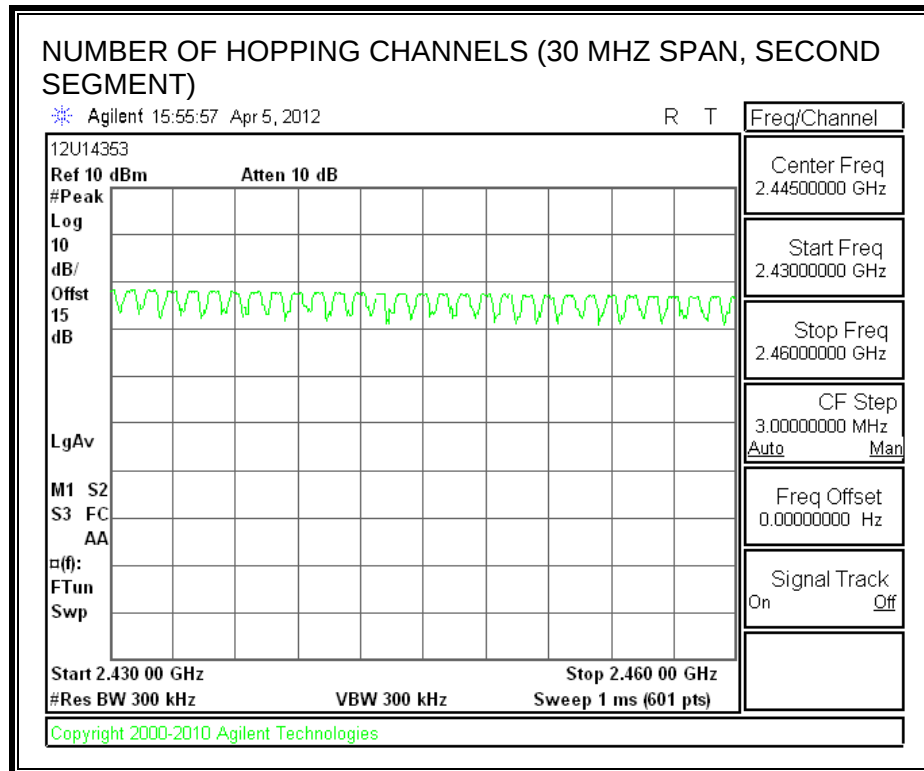

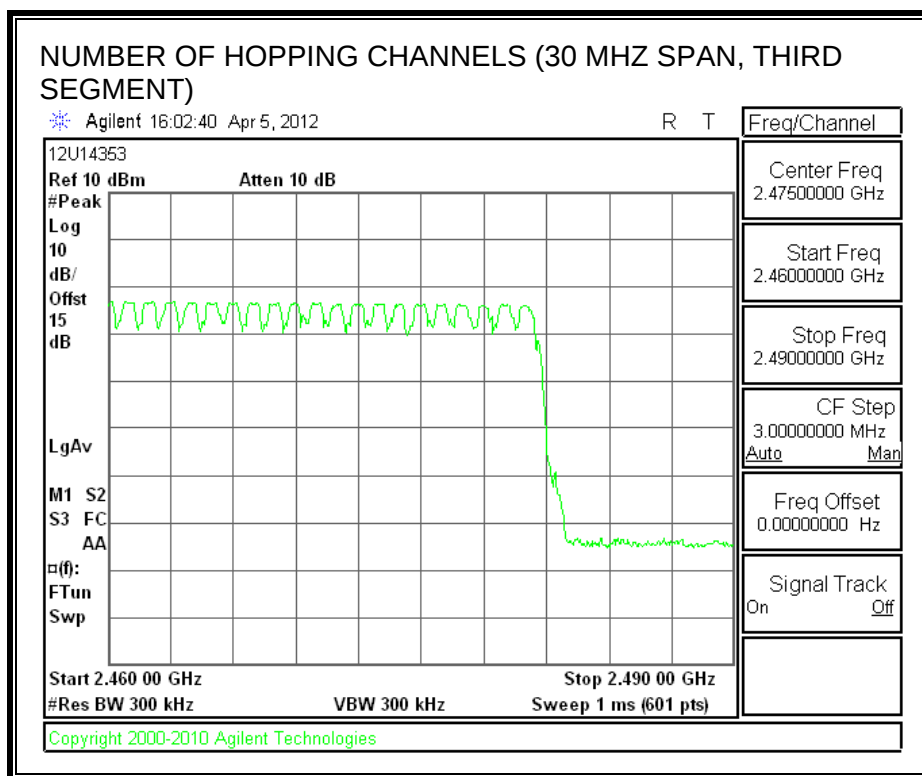

7.2.4. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.


RESULTS

Time Of Occupancy = $10 * xx \text{ pulses} * yy \text{ msec} = zz \text{ msec}$


8PSK (EDR) Mode

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of (sec)	Limit (sec)	Margin (sec)
DH1	0.39	32	0.125	0.4	-0.275
DH3	1.642	17	0.279	0.4	-0.121
DH5	2.883	8	0.231	0.4	-0.169


PULSE WIDTH - DH1

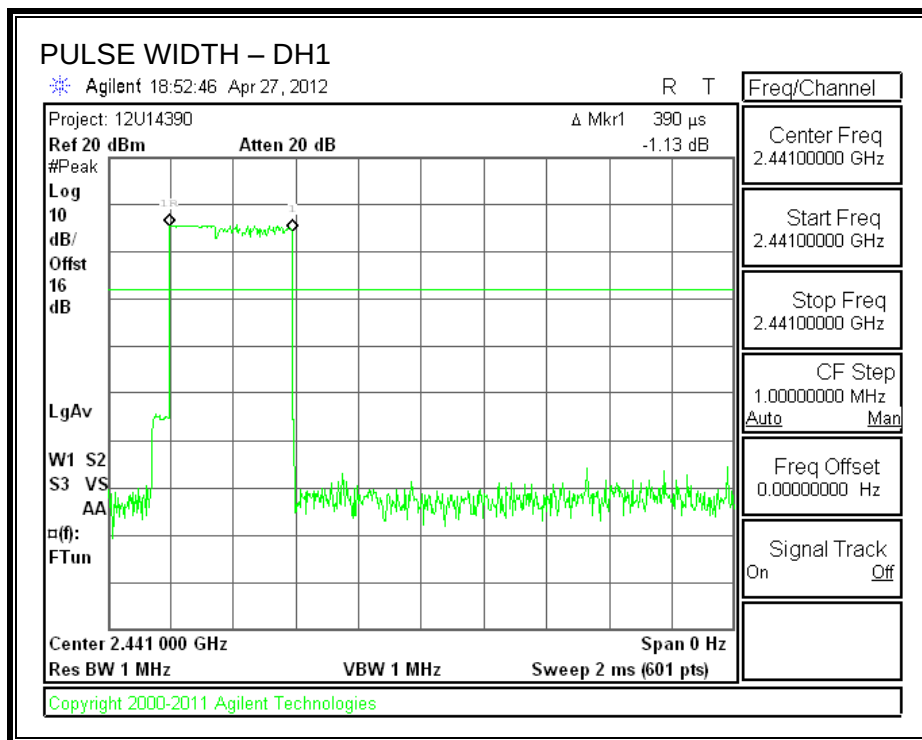


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH1

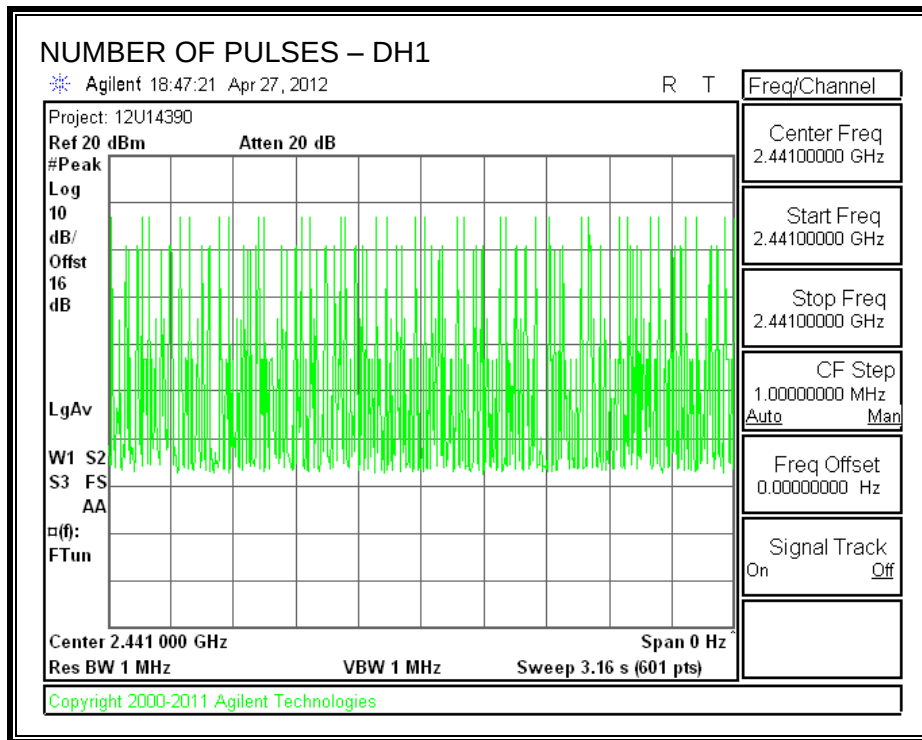


PULSE WIDTH – DH3

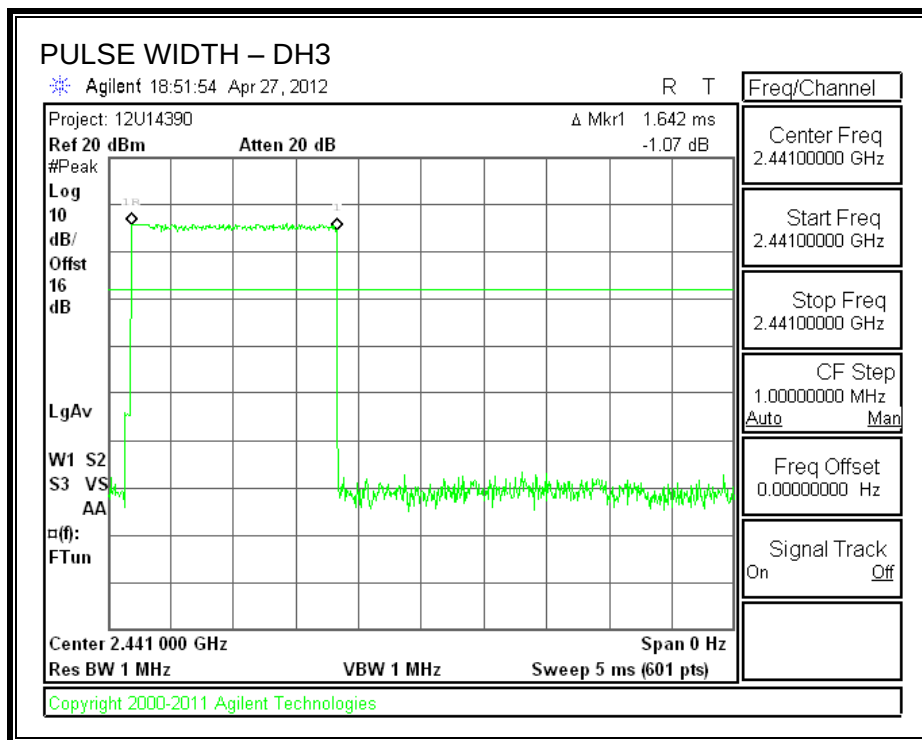


NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH3

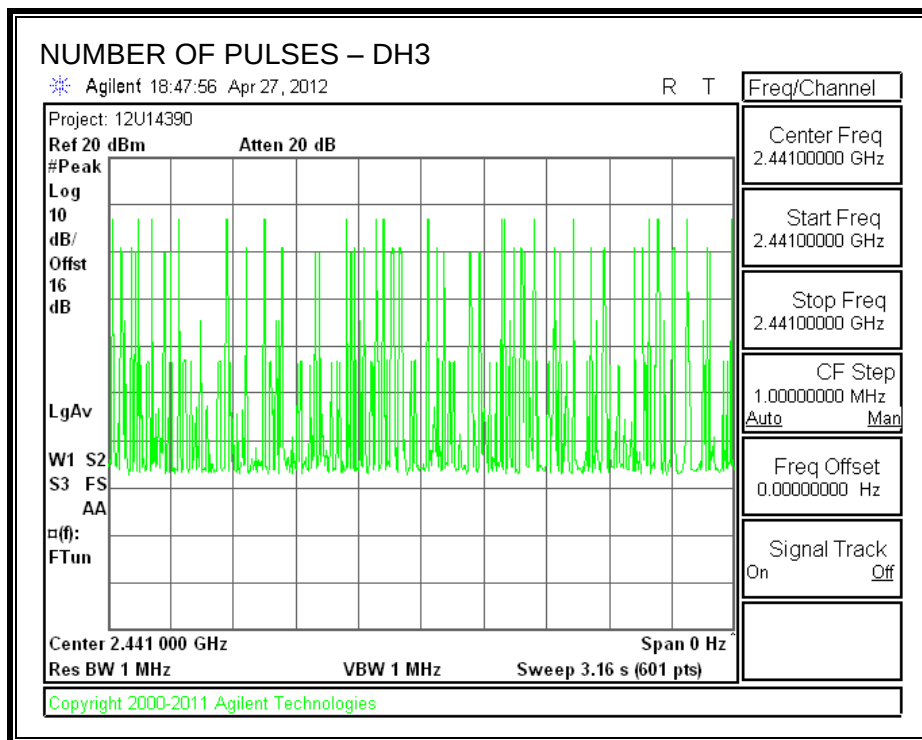

PULSE WIDTH – DH5

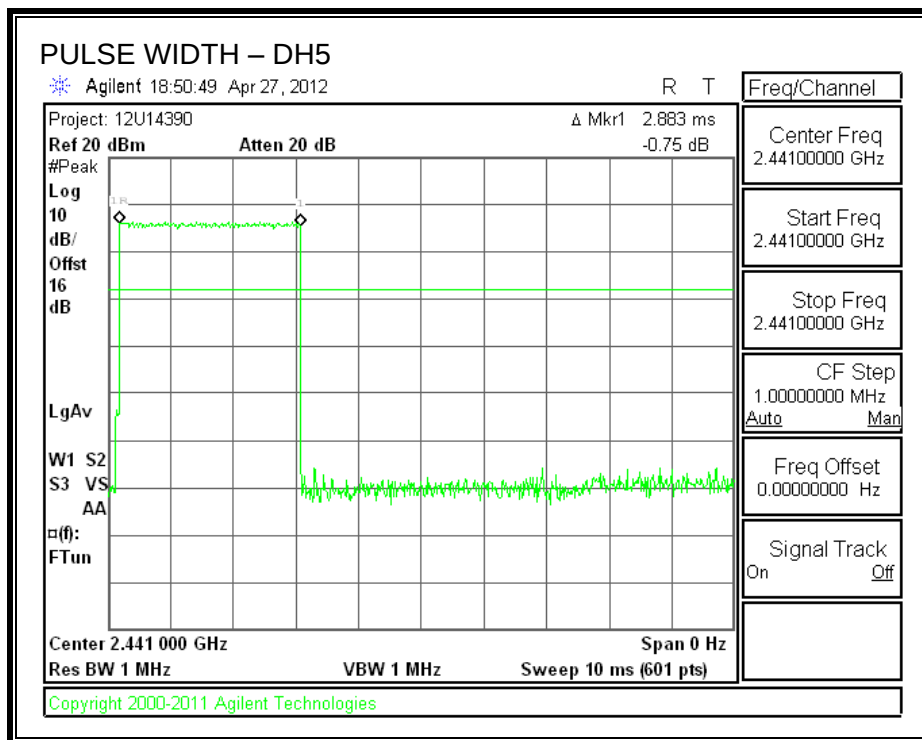

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH5

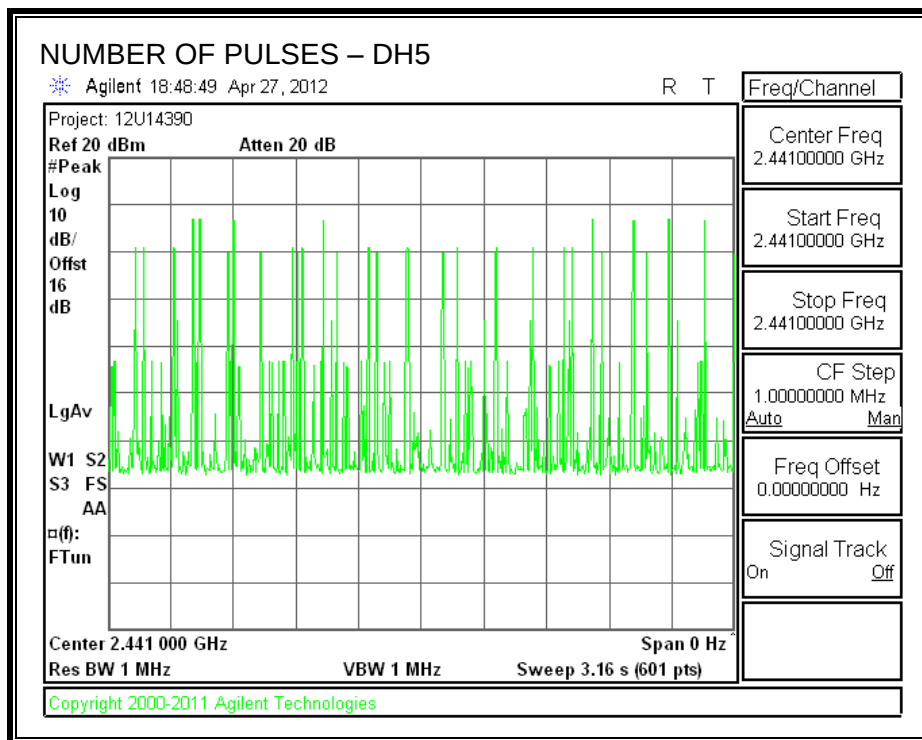

7.2.5. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.


RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	8.93	30	-21.07
Middle	2441	9.94	30	-20.06
High	2480	10.07	30	-19.93

OUTPUT POWER

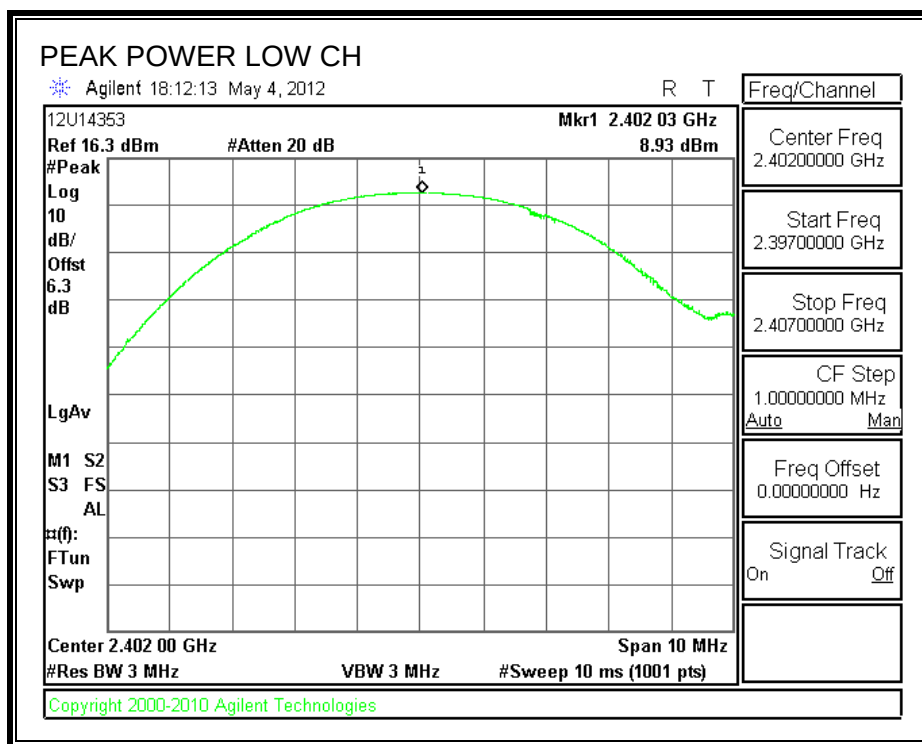

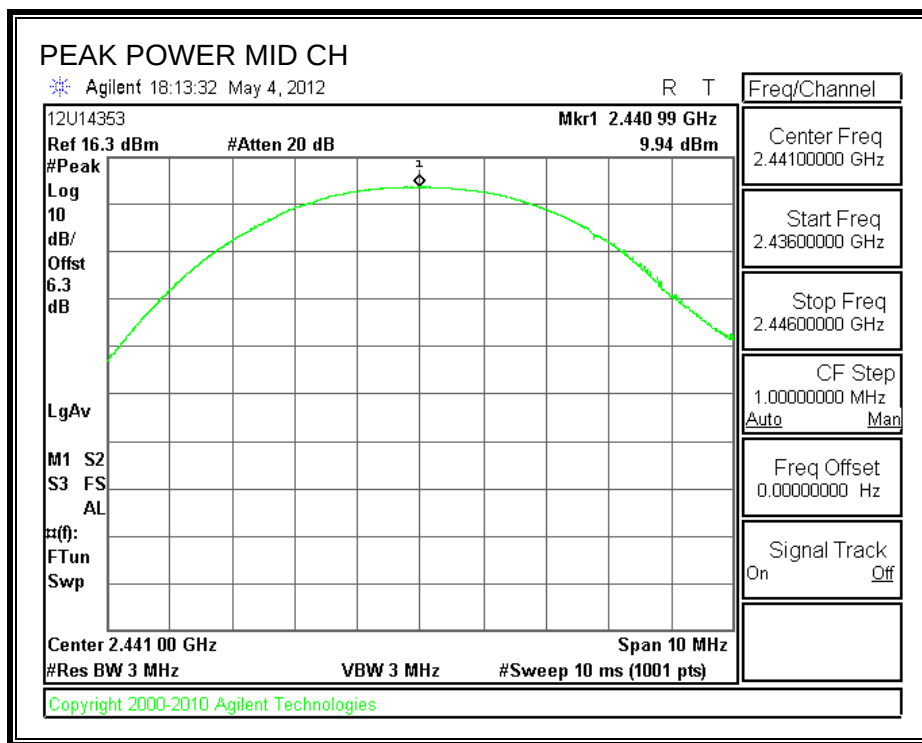

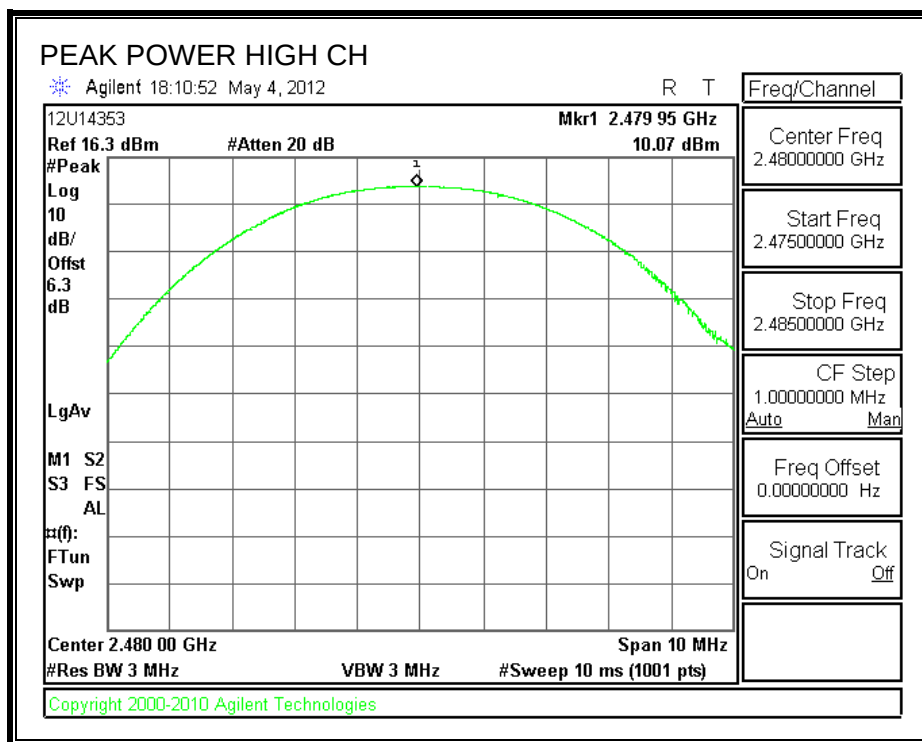

7.2.6. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 0.88 dB (including 0 dB pad and 0.88 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	8.70
Middle	2441	9.10
High	2480	9.00

7.2.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.


RESULTS


SPURIOUS EMISSIONS, LOW CHANNEL

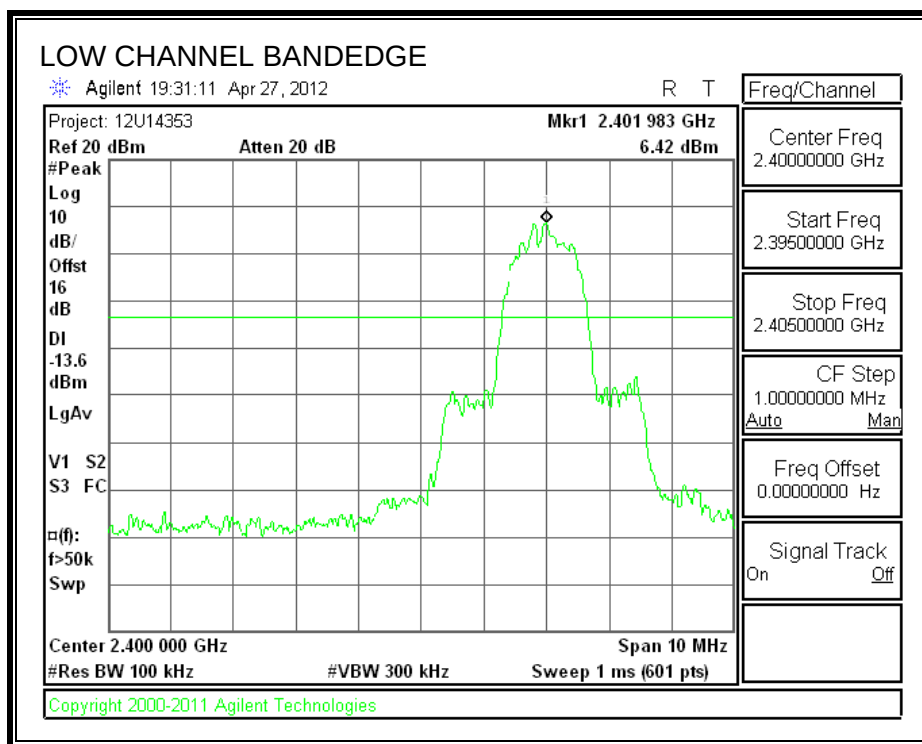

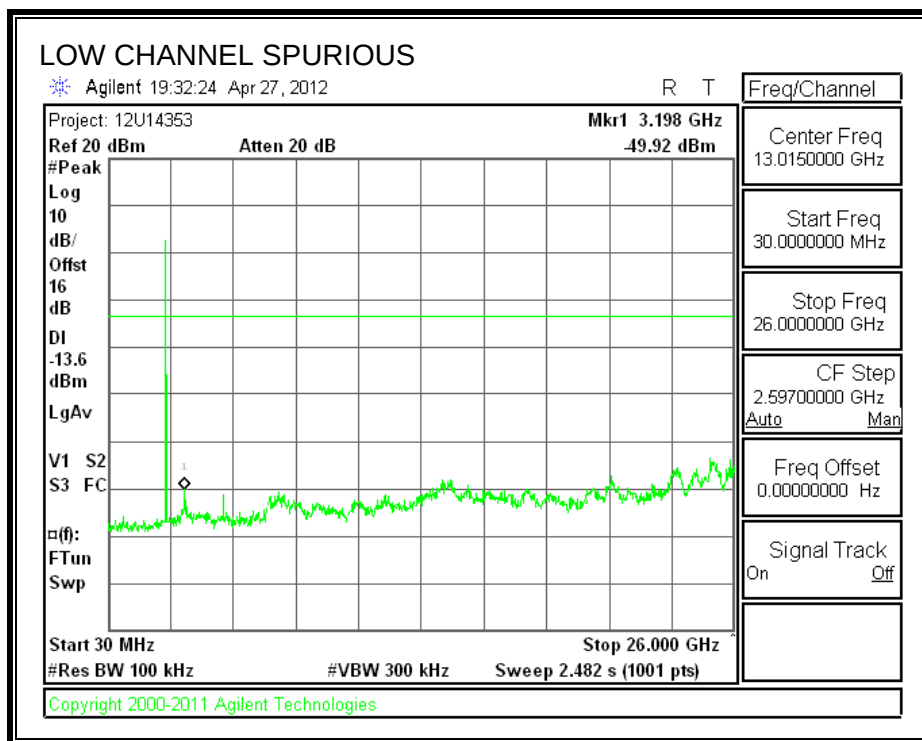



SPURIOUS EMISSIONS, MID CHANNEL

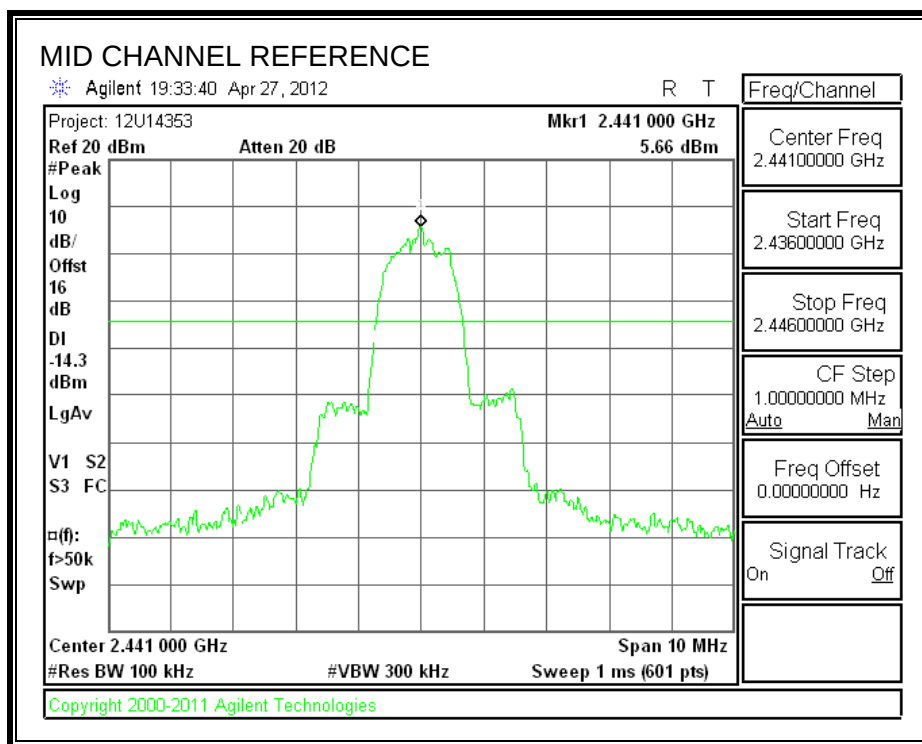

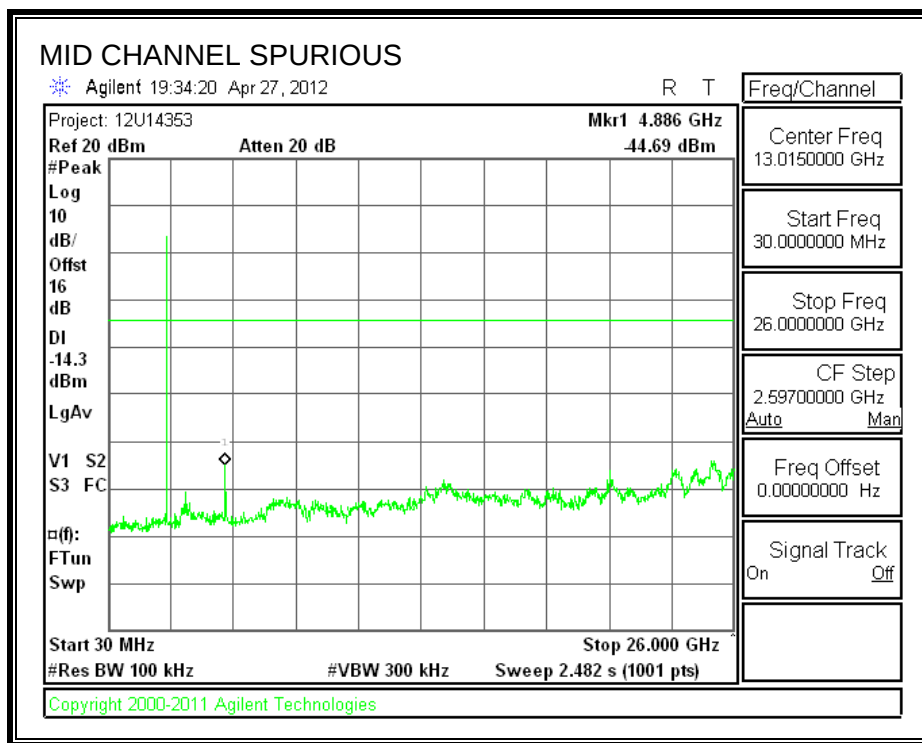



SPURIOUS EMISSIONS, HIGH CHANNEL

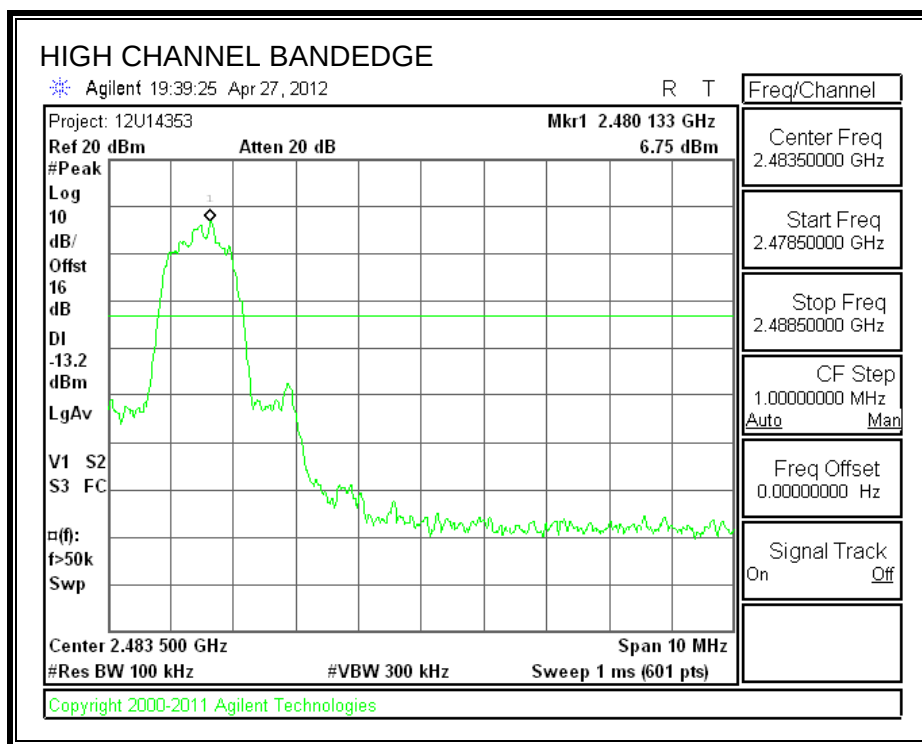

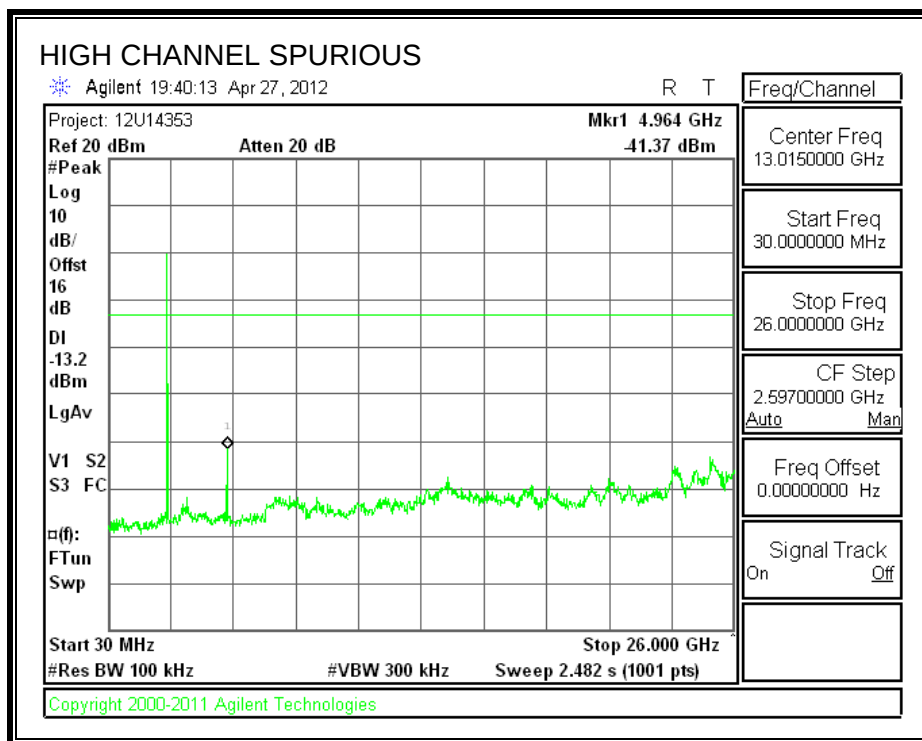


SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

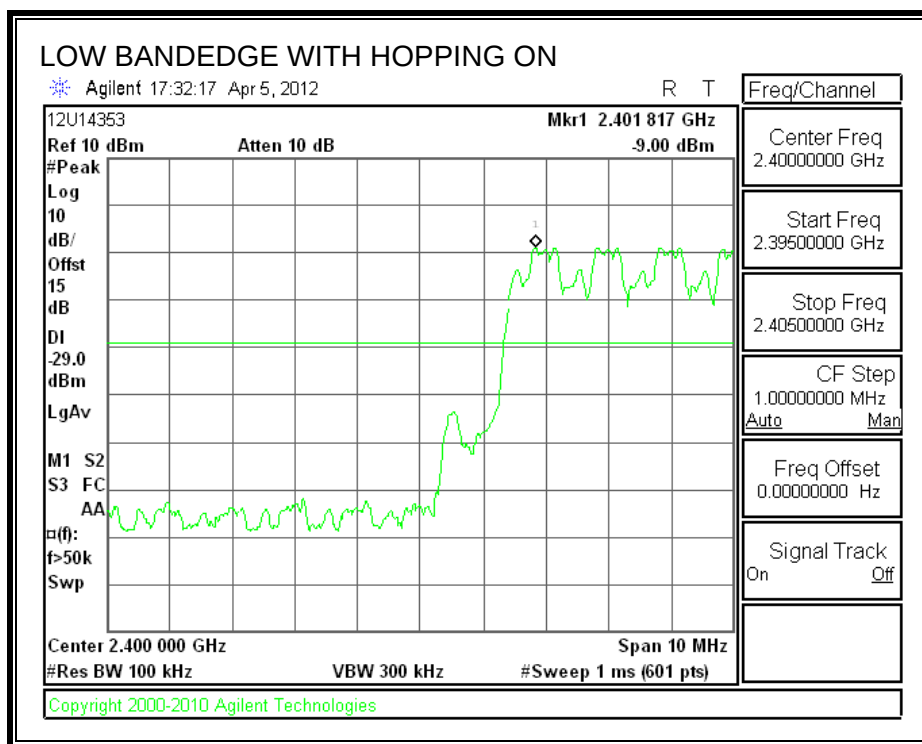


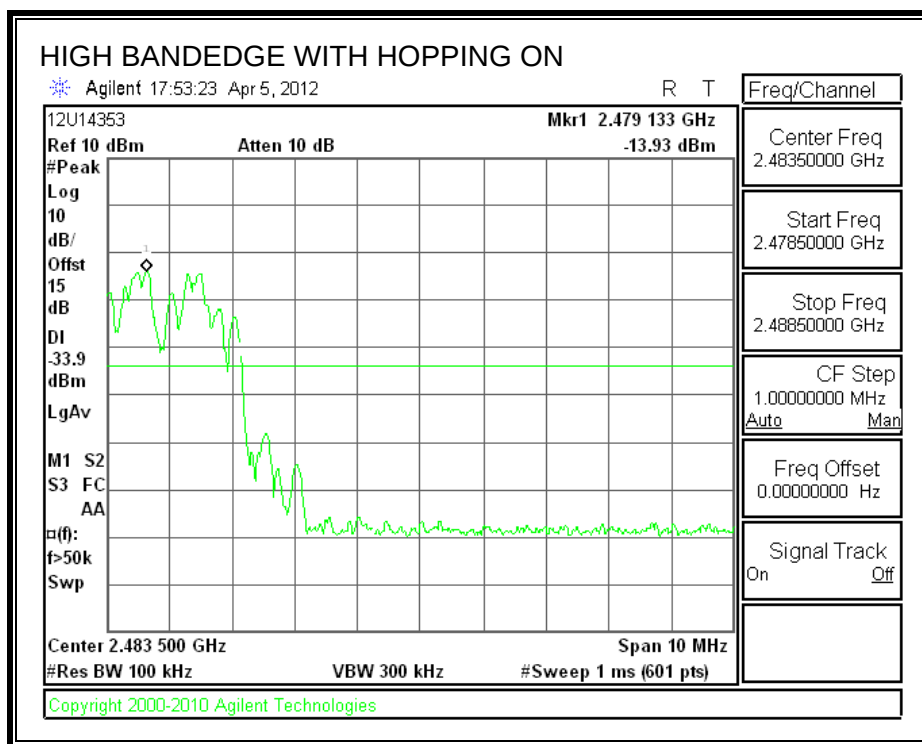


7.2.8. BASIC DATA RATE GFSK MODULATION


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

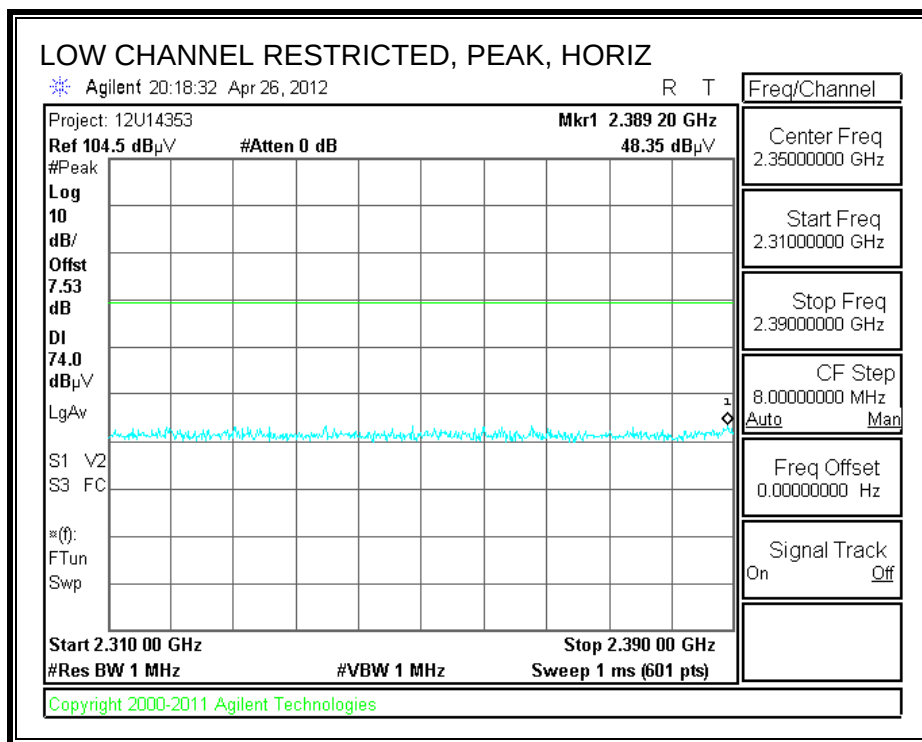

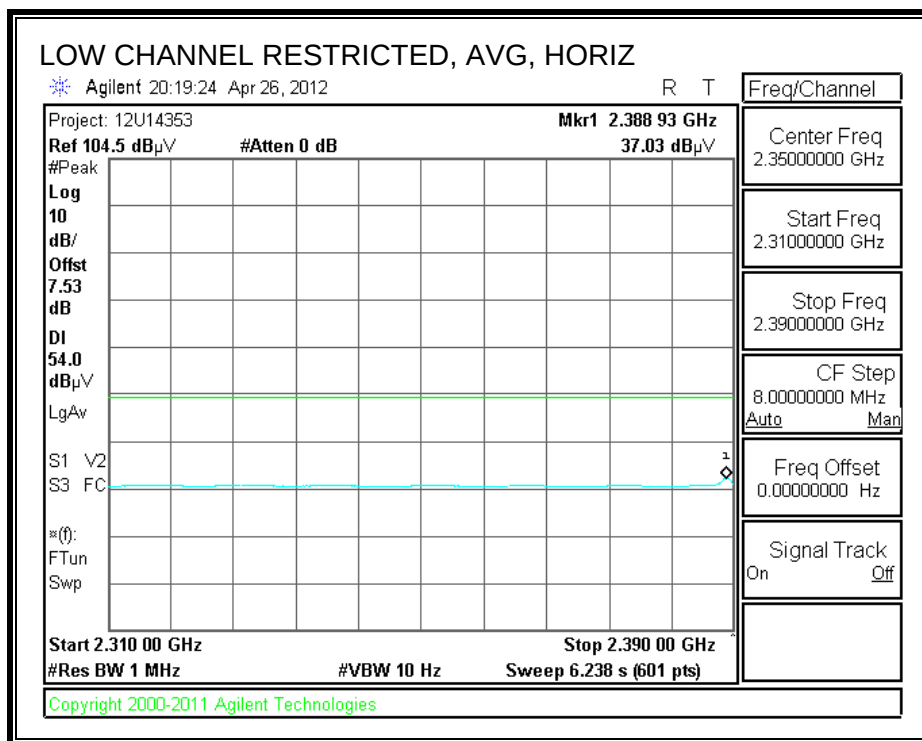



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

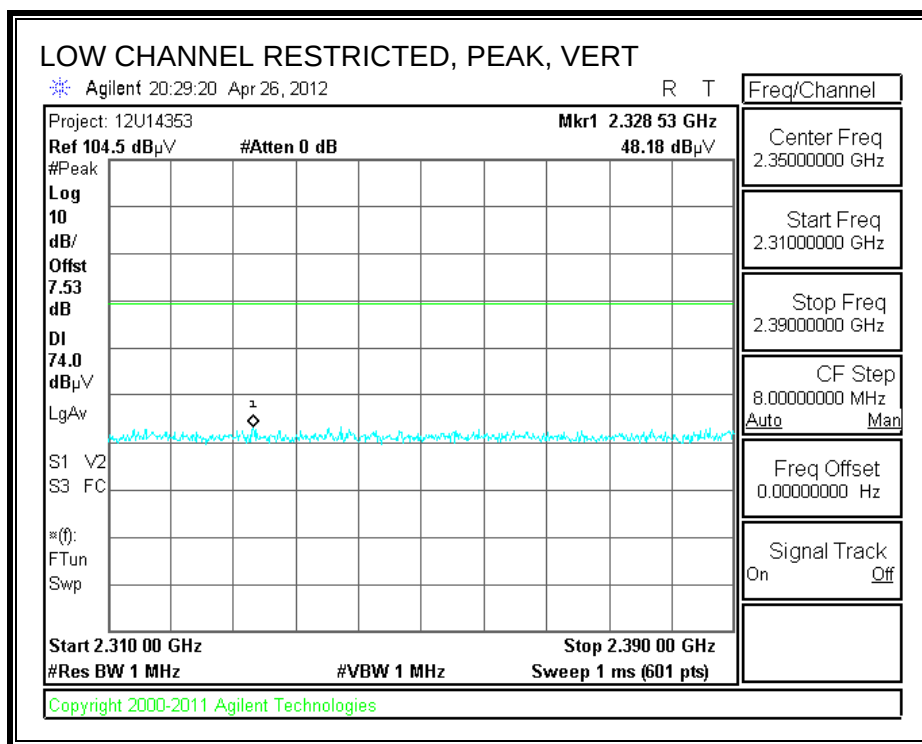

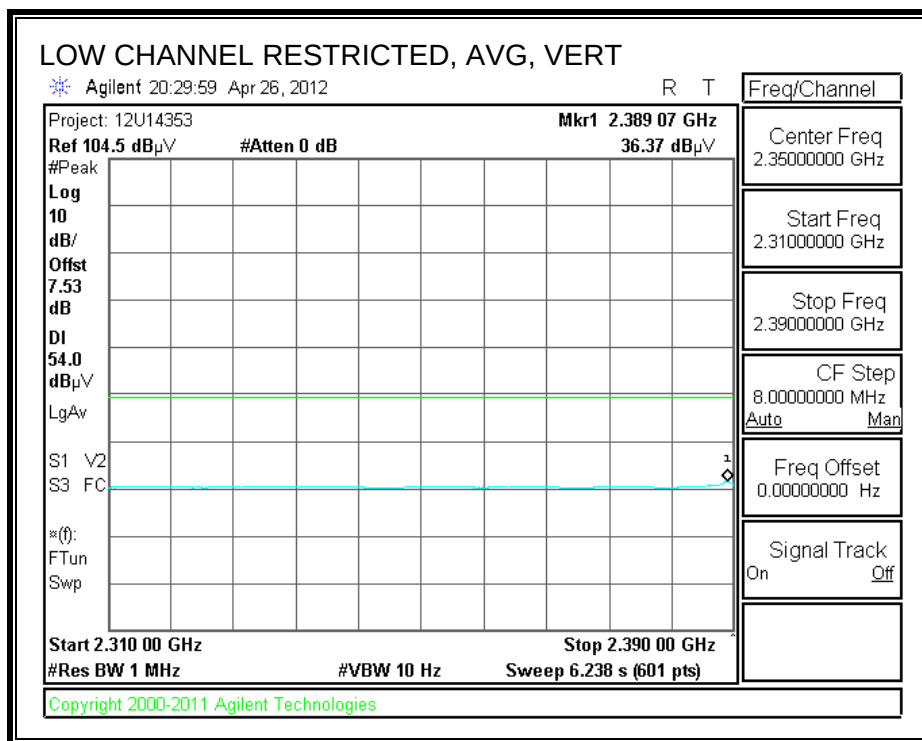



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

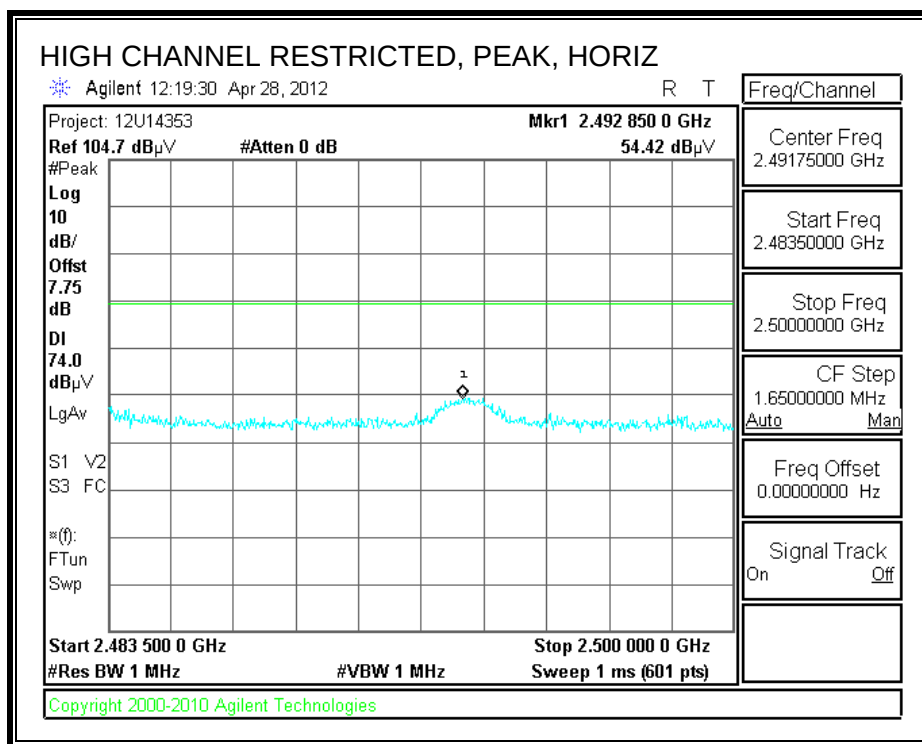

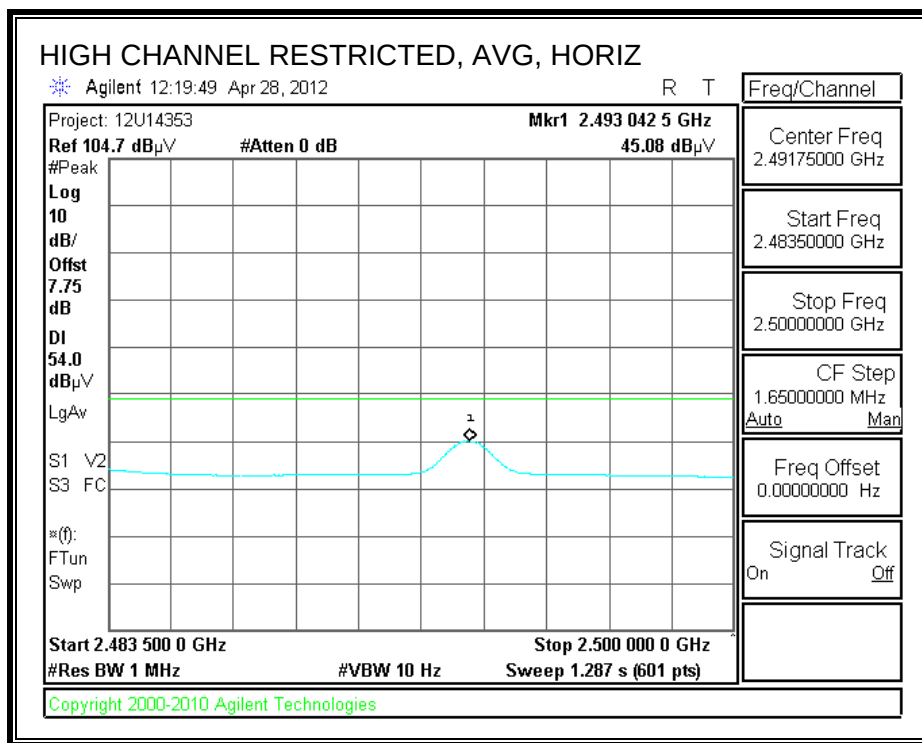

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

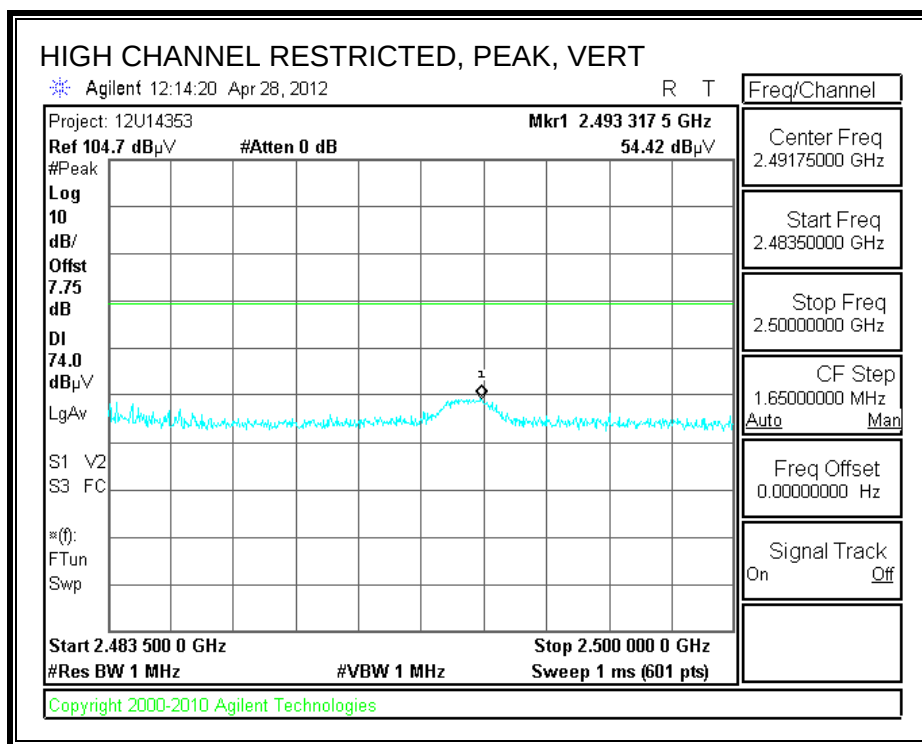

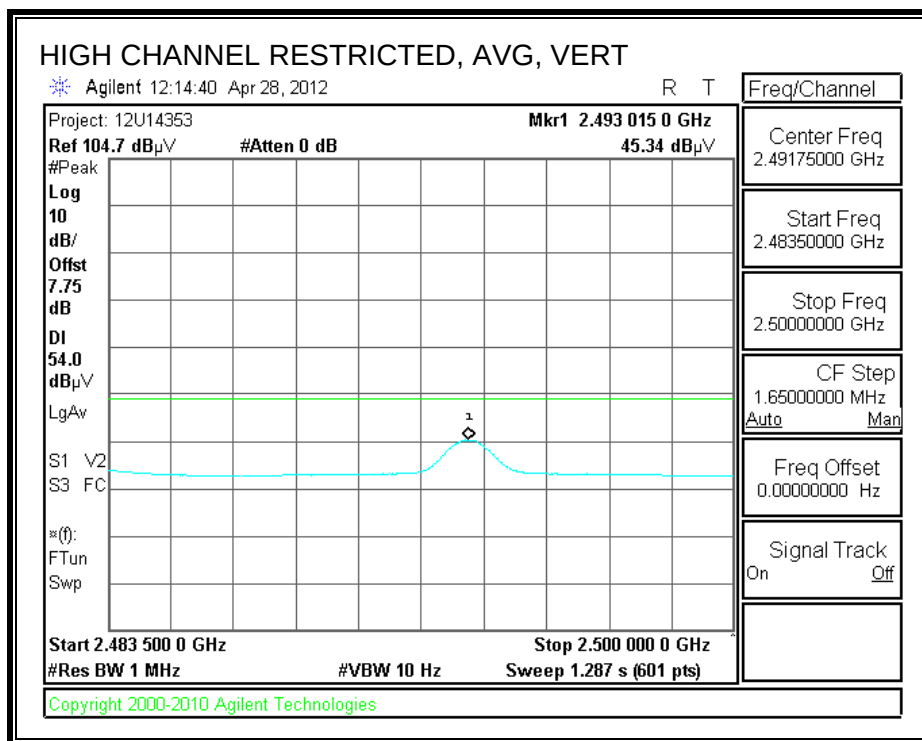

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement

Compliance Certification Services, Fremont 5m Chamber

Test Engr: Tom Chen
Date: 05/04/12
Project #: 12U14353
Company: LG Electronics
Test Target: FCC Class B
Mode Oper: BT, GFSK TX mode

f Measurement Frequency Amp Preamp Gain Average Field Strength Limit
Dist Distance to Antenna D Corr Distance Correct to 3 meters Peak Field Strength Limit
Read Analyzer Reading Avg Average Field Strength @ 3 m Margin vs. Average Limit
AF Antenna Factor Peak Calculated Peak Field Strength Margin vs. Peak Limit
CL Cable Loss HPF High Pass Filter

f GHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Notes
2402MHz GFSK													
4.804	3.0	56.0	33.4	6.2	-35.5	0.0	0.0	60.1	74.0	-13.9	H	P	
4.804	3.0	48.2	33.4	6.2	-35.5	0.0	0.0	52.3	54.0	-8.3	H	A	
4.804	3.0	60.0	33.4	6.2	-35.5	0.0	0.0	64.1	74.0	-9.9	V	P	
4.804	3.0	51.6	33.4	6.2	-35.5	0.0	0.0	55.7	54.0	-4.8	V	A	
2441MHz GFSK													
4.882	3.0	48.4	33.5	6.2	-35.5	0.0	0.0	52.7	74.0	-21.3	V	P	
4.882	3.0	40.1	33.5	6.2	-35.5	0.0	0.0	44.4	54.0	-16.2	V	A	
4.882	3.0	44.7	33.5	6.2	-35.5	0.0	0.0	48.9	74.0	-25.1	H	P	
4.882	3.0	36.7	33.5	6.2	-35.5	0.0	0.0	41.0	54.0	-19.6	H	A	
2480MHz GFSK													
4.960	3.0	50.8	33.6	6.3	-35.5	0.0	0.0	55.1	74.0	-18.9	H	P	
4.960	3.0	43.2	33.6	6.3	-35.5	0.0	0.0	47.6	54.0	-13.0	H	A	
4.960	3.0	52.8	33.6	6.3	-35.5	0.0	0.0	57.2	74.0	-16.8	V	P	
4.960	3.0	45.0	33.6	6.3	-35.5	0.0	0.0	49.4	54.0	-11.2	V	A	


Rev. 4.1.2.7


Note: No other emissions were detected above the system noise floor.

added Duty correct -6.56


7.2.9. ENHANCED DATA RATE 8PSK MODULATION


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

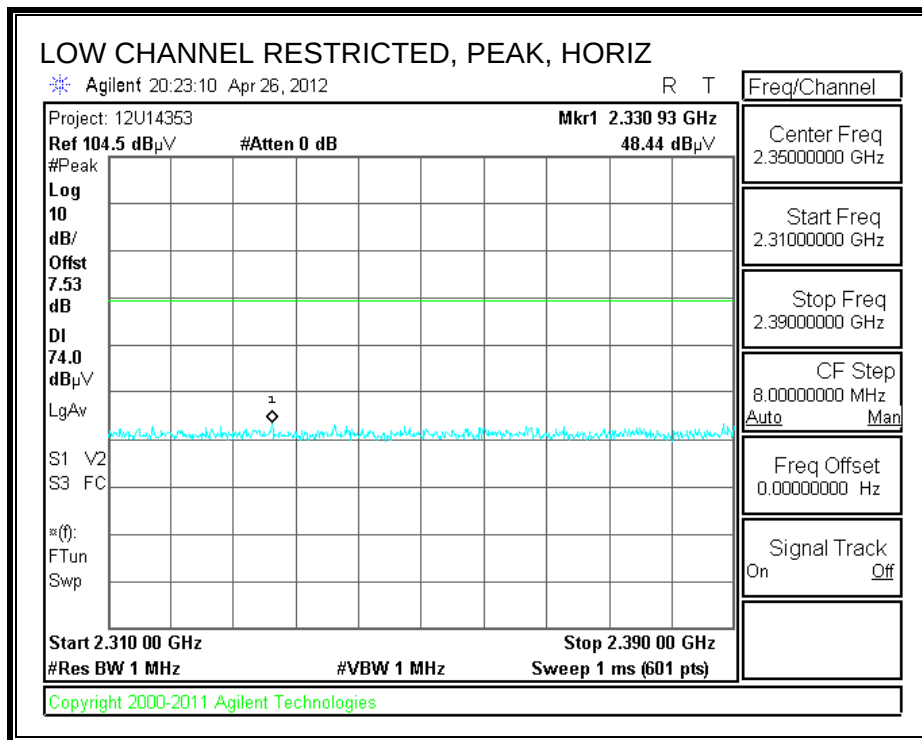

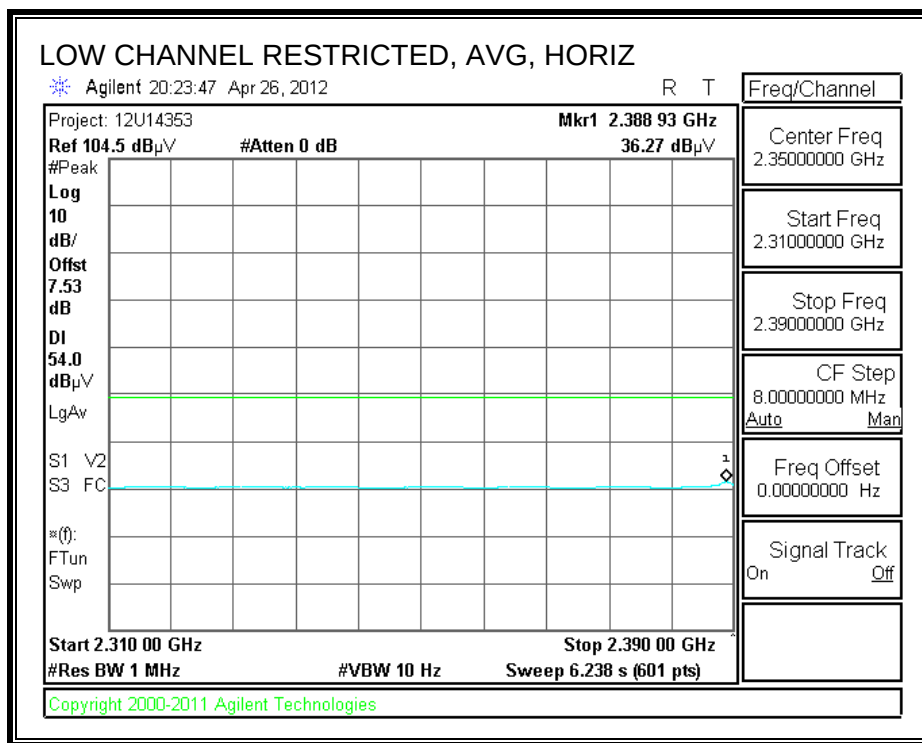



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

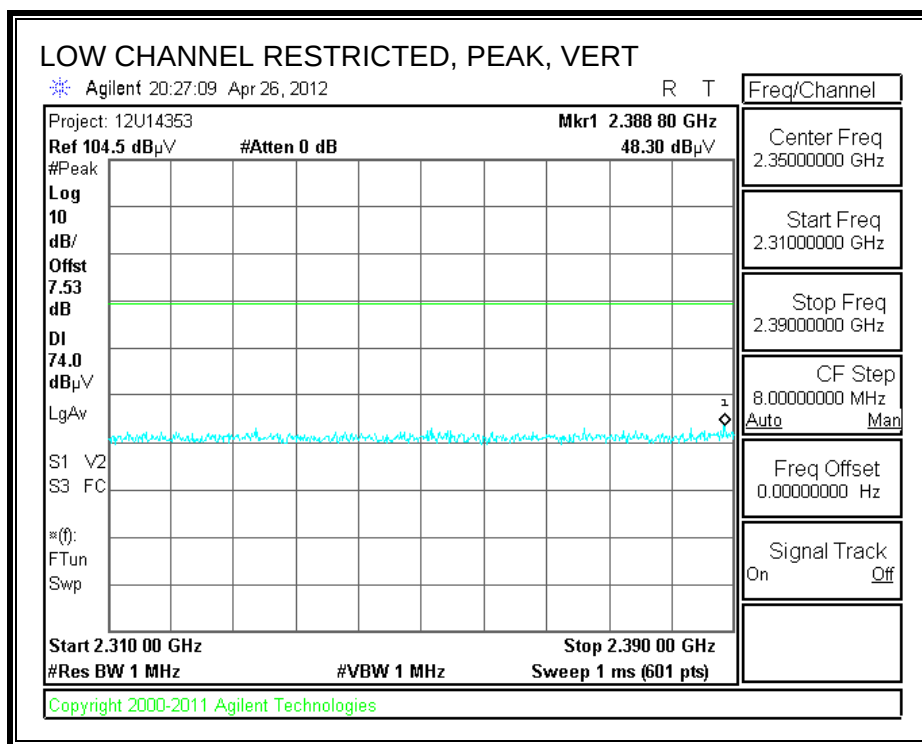

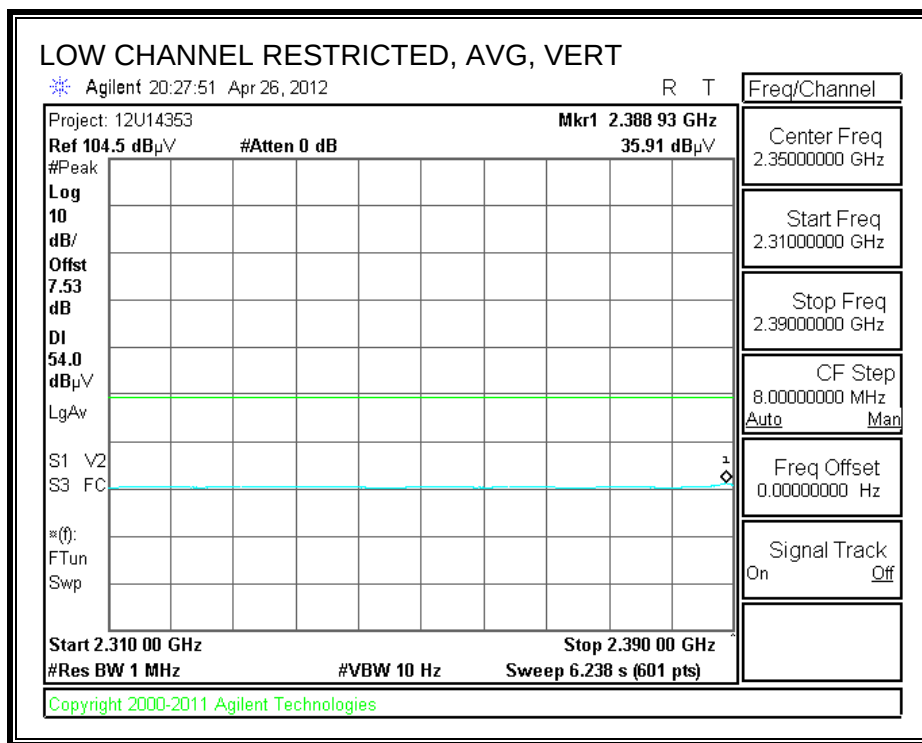



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

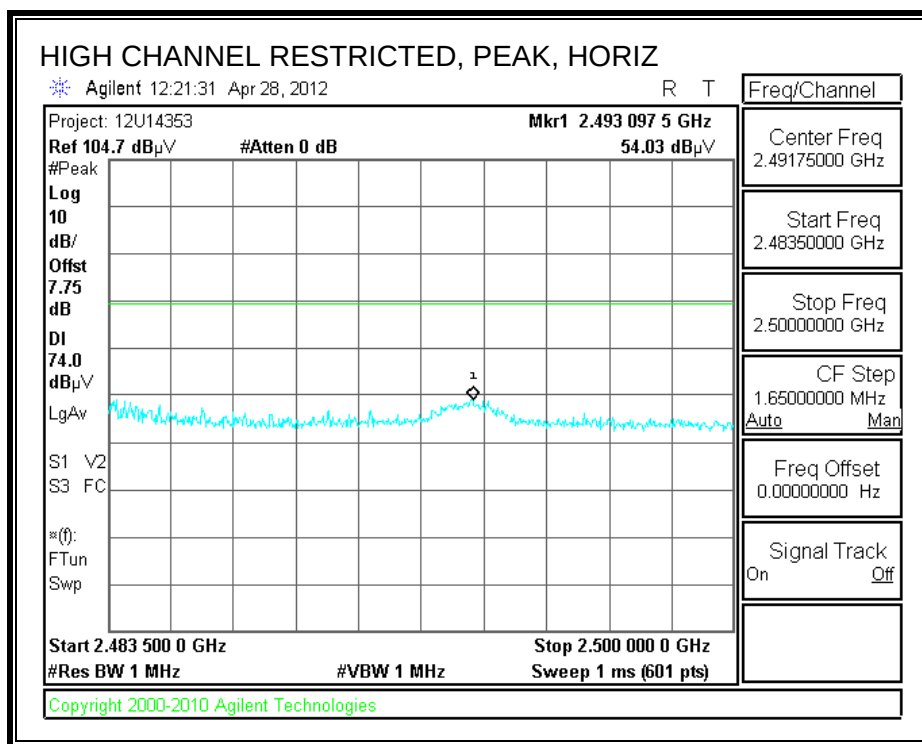

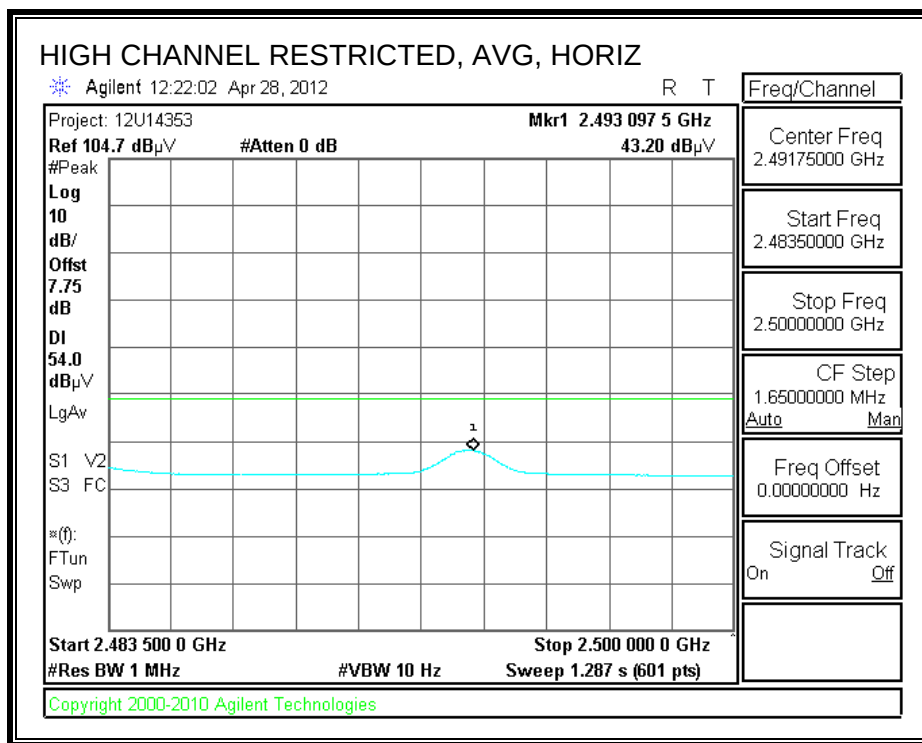

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

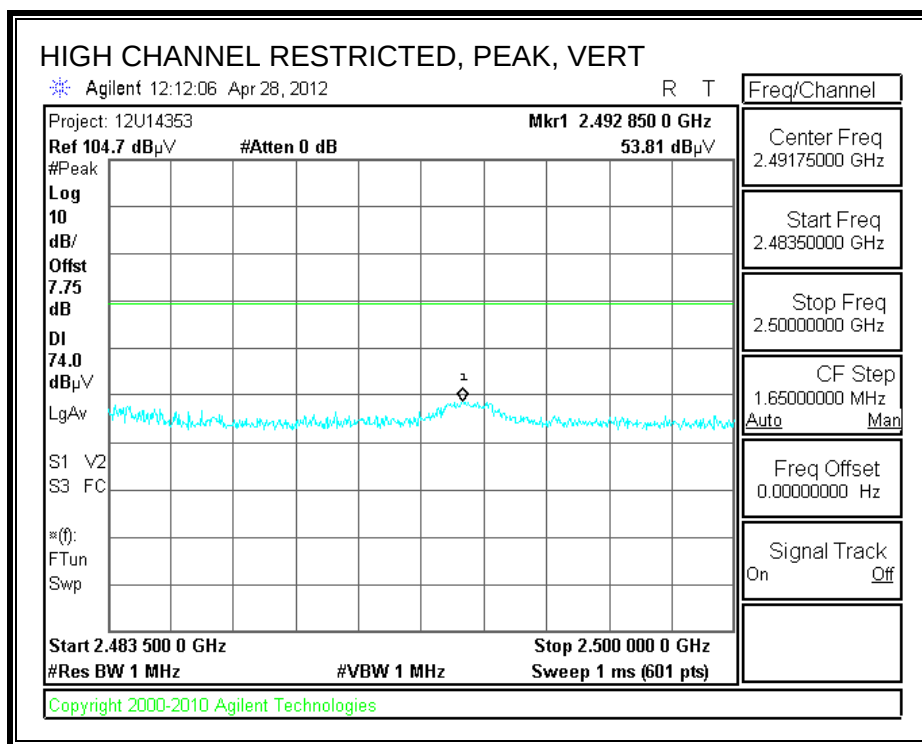

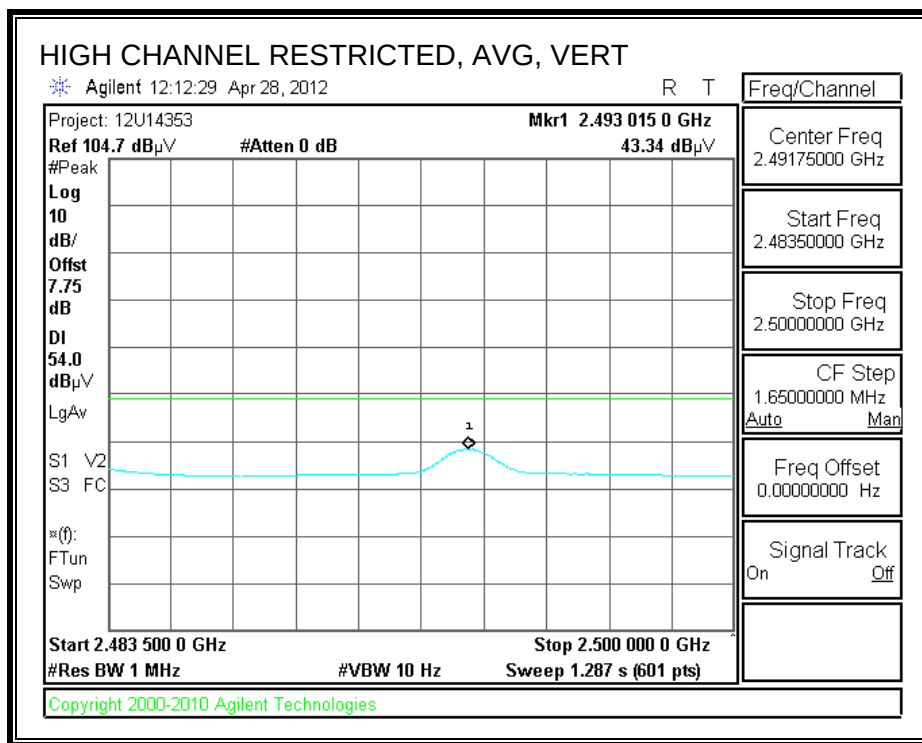

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber

Test Engr: Tom Chen
Date: 05/04/12
Project #: 12U14353
Company: LG Electronics
Test Target: FCC Class B
Mode Oper: BT, 8PSK TX mode

f Measurement Frequency Amp Preamp Gain Average Field Strength Limit
Dist Distance to Antenna D Corr Distance Correct to 3 meters Peak Field Strength Limit
Read Analyzer Reading Avg Average Field Strength @ 3 m Margin vs. Average Limit
AF Antenna Factor Peak Calculated Peak Field Strength Margin vs. Peak Limit
CL Cable Loss HPF High Pass Filter

f GHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Notes
2402MHz 8PSK													
4.804	3.0	49.2	33.1	6.8	-34.1	0.0	0.0	55.0	74.0	-19.0	H	P	X pos
4.804	3.0	38.8	33.1	6.8	-34.1	0.0	0.0	44.6	54.0	-15.9	H	A	X pos
4.804	3.0	57.9	33.1	6.8	-34.1	0.0	0.0	63.7	74.0	-10.3	V	P	X pos
4.804	3.0	45.6	33.1	6.8	-34.1	0.0	0.0	51.4	54.0	-9.2	V	A	X pos
2441MHz 8PSK													
4.882	3.0	61.0	33.2	6.8	-34.0	0.0	0.0	67.0	74.0	-7.0	V	P	X pos
4.882	3.0	48.8	33.2	6.8	-34.0	0.0	0.0	54.8	54.0	-5.8	V	A	X pos
4.882	3.0	54.1	33.2	6.8	-34.0	0.0	0.0	60.1	74.0	-13.9	H	P	X pos
4.882	3.0	43.0	33.2	6.8	-34.0	0.0	0.0	48.9	54.0	-11.6	H	A	X pos
2480MHz 8PSK													
4.960	3.0	58.9	33.2	6.9	-34.0	0.0	0.0	65.0	74.0	-9.0	H	P	X pos
4.960	3.0	46.9	33.2	6.9	-34.0	0.0	0.0	52.9	54.0	-7.6	H	A	X pos
4.960	3.0	60.3	33.2	6.9	-34.0	0.0	0.0	66.3	74.0	-7.7	V	P	X pos
4.960	3.0	47.9	33.2	6.9	-34.0	0.0	0.0	54.0	54.0	-6.6	V	A	X pos


Rev. 4.1.2.7

Note: No other emissions were detected above the system noise floor.


added Duty correct -6.56

7.3. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

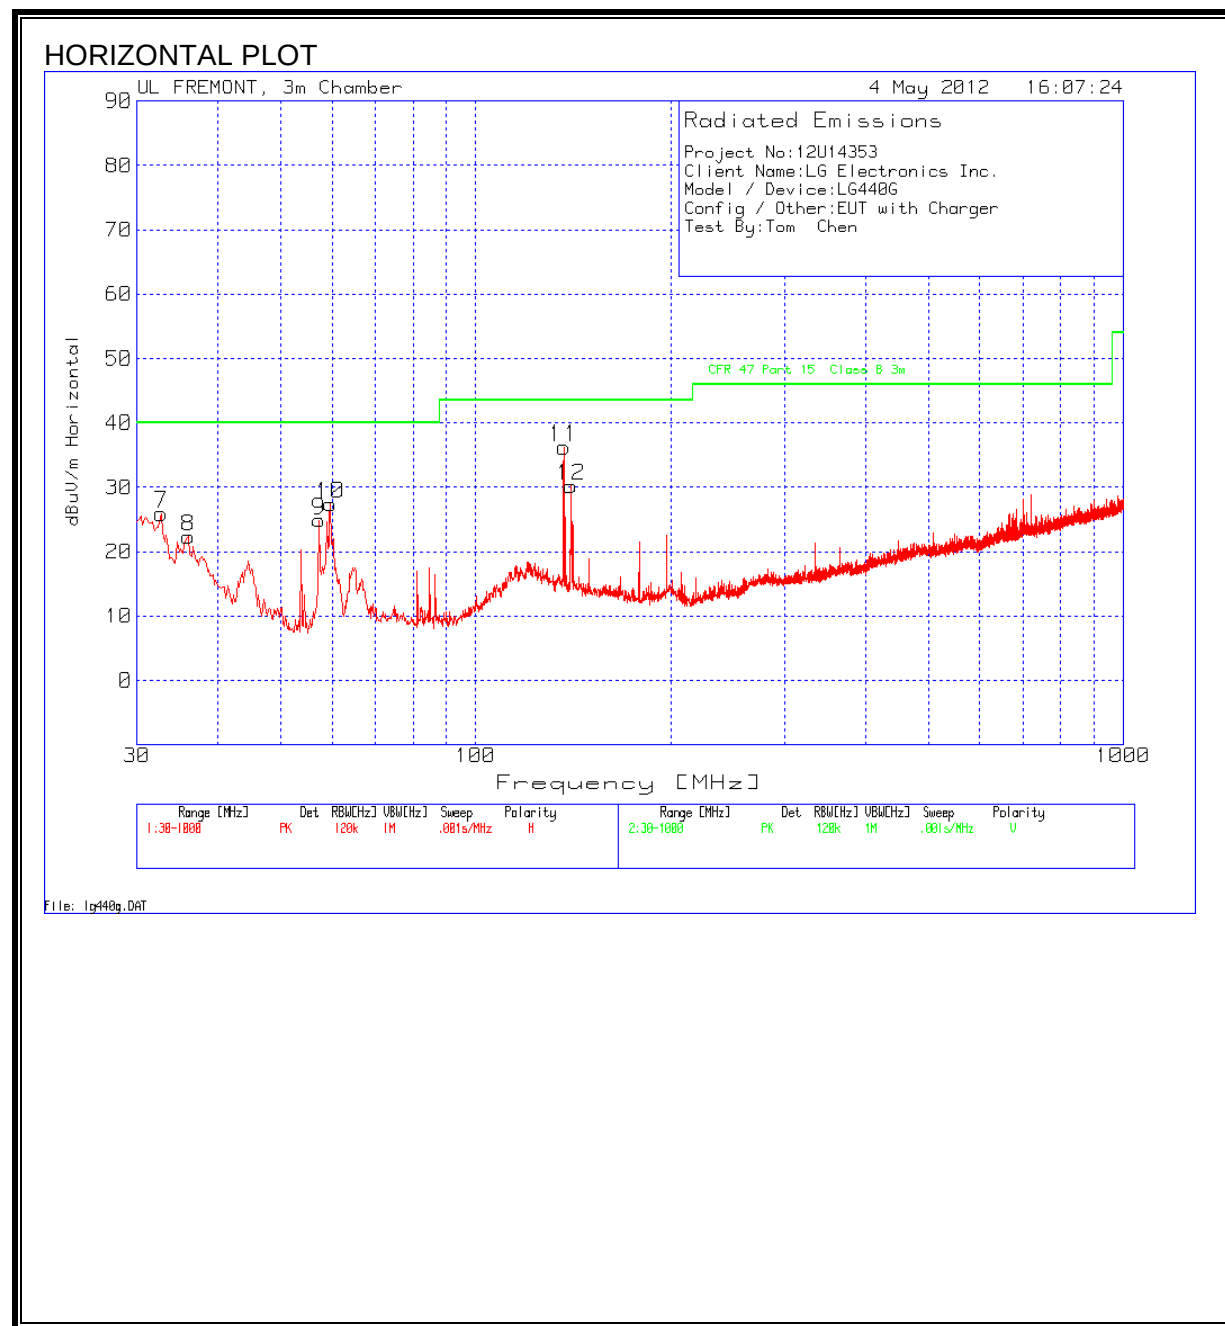

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

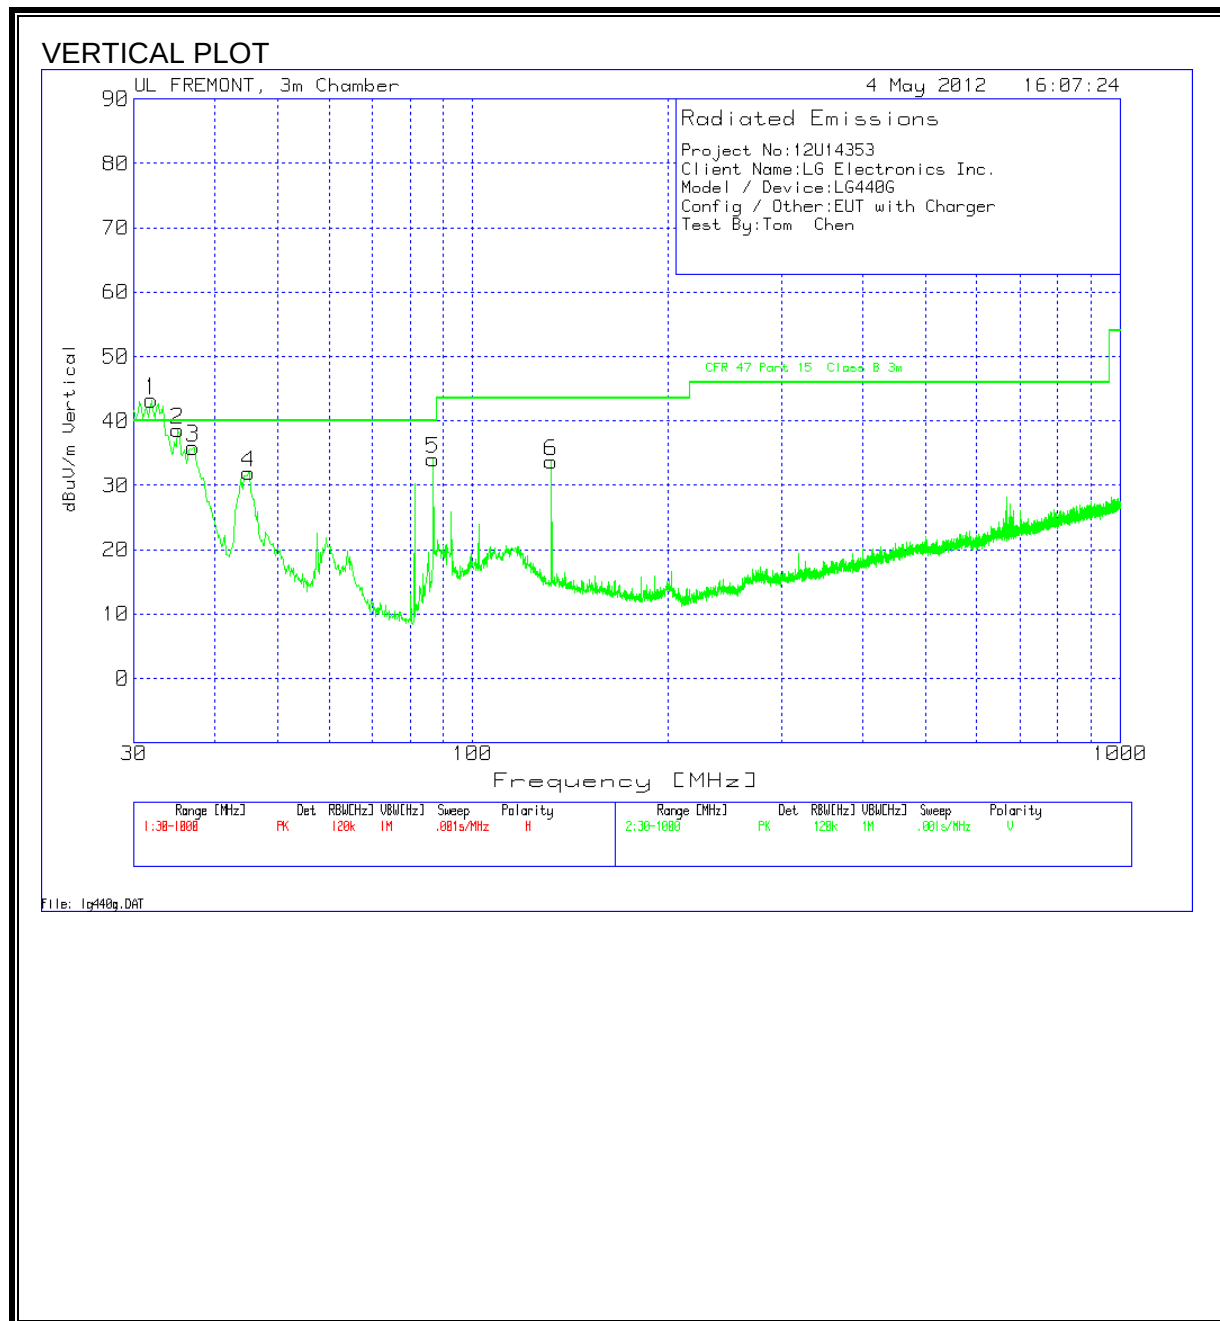

HORIZONTAL AND VERTICAL DATA

Project No:12U14353									
Client Name:LG Electronics Inc.									
Model / Device:LG440G									
Config / Other:EUT with Charger									
Test By:Tom Chen									

Horizontal 30 - 1000MHz

Test Frequency	Meter Reading	Detector	25MHz-1GHz Chambr 3m Amplified (dB)	Antenna T185 (dB)	dBuV/m	CFR 47 Part 15 Class B 3m	Margin	Height [cm]	Polarity
32.7138	34.2	PK	-27.5	19.2	25.9	40	-14.1	301	Horz
36.0092	32.94	PK	-27.4	16.8	22.34	40	-17.66	100	Horz
57.3321	45.12	PK	-27.2	7	24.92	40	-15.08	400	Horz
59.6583	47.43	PK	-27.2	7.2	27.43	40	-12.57	400	Horz
136.8086	49.34	PK	-26.5	13.4	36.24	43.5	-7.26	201	Horz
140.2978	43.6	PK	-26.5	13.1	30.2	43.5	-13.3	400	Horz

Vertical 30 - 1000MHz

Test Frequency	Meter Reading	Detector	25MHz-1GHz Chambr 3m Amplified (dB)	Antenna T185 (dB)	dBuV/m	CFR 47 Part 15 Class B 3m	Margin	Height [cm]	Polarity
32.0419	44.98	QP	-27.5	19.8	37.28	40	-2.72	107	Vert
35.1288	42.93	QP	-27.4	17.3	32.83	40	-7.17	104	Vert
36.9784	47.31	PK	-27.4	16	35.91	40	-4.09	101	Vert
45.1199	49.17	PK	-27.4	10.2	31.97	40	-8.03	101	Vert
86.9904	53.69	PK	-27	7.4	34.09	40	-5.91	101	Vert
132.3501	46.77	PK	-26.5	13.4	33.67	43.5	-9.83	201	Vert

8. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.


Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

6 WORST EMISSIONS

Project No:12U14353									
Client Name:LG Electronics Inc.									
Model/Device:LG440G									
Test Volt/Freq:120 VAC / 60 Hz									
Test By:Tom Chen									
Line-L1 .15 - 30MHz									
Test Frequency	Meter Reading	Detector	T24 IL L1.TXT (dB)	LC Cables 1&3.TXT (dB)	dBuV	CFR 47 Part 15 Class B QP	Margin	CFR 47 Part 15 Class B Avg	Margin
0.1545	42.02	PK	0.1	0	42.12	65.8	-23.68	55.8	-13.68
0.1545	25.48	Av	0.1	0	25.58	65.8	-40.22	55.8	-30.22
0.411	39.63	PK	0.1	0	39.73	57.6	-17.87	47.6	-7.87
0.411	28.66	Av	0.1	0	28.76	57.6	-28.84	47.6	-18.84
5.199	44.26	PK	0.1	0.1	44.46	60	-15.54	50	-5.54
5.199	30.45	Av	0.1	0.1	30.65	60	-29.35	50	-19.35
Line-L2 .15 - 30MHz									
Test Frequency	Meter Reading	Detector	T24 IL L2.TXT (dB)	LC Cables 2&3.TXT (dB)	dBuV	CFR 47 Part 15 Class B QP	Margin	CFR 47 Part 15 Class B Avg	Margin
0.1545	21.86	PK	0.1	0	21.96	65.8	-43.84	55.8	-33.84
0.1545	0.41	Av	0.1	0	0.51	65.8	-65.29	55.8	-55.29
0.4155	26.2	PK	0.1	0	26.3	57.5	-31.2	47.5	-21.2
0.4155	11.34	Av	0.1	0	11.44	57.5	-46.06	47.5	-36.06
5.2305	27.23	PK	0.1	0.1	27.43	60	-32.57	50	-22.57
5.2305	12.62	Av	0.1	0.1	12.82	60	-47.18	50	-37.18

LINE 1 RESULTS

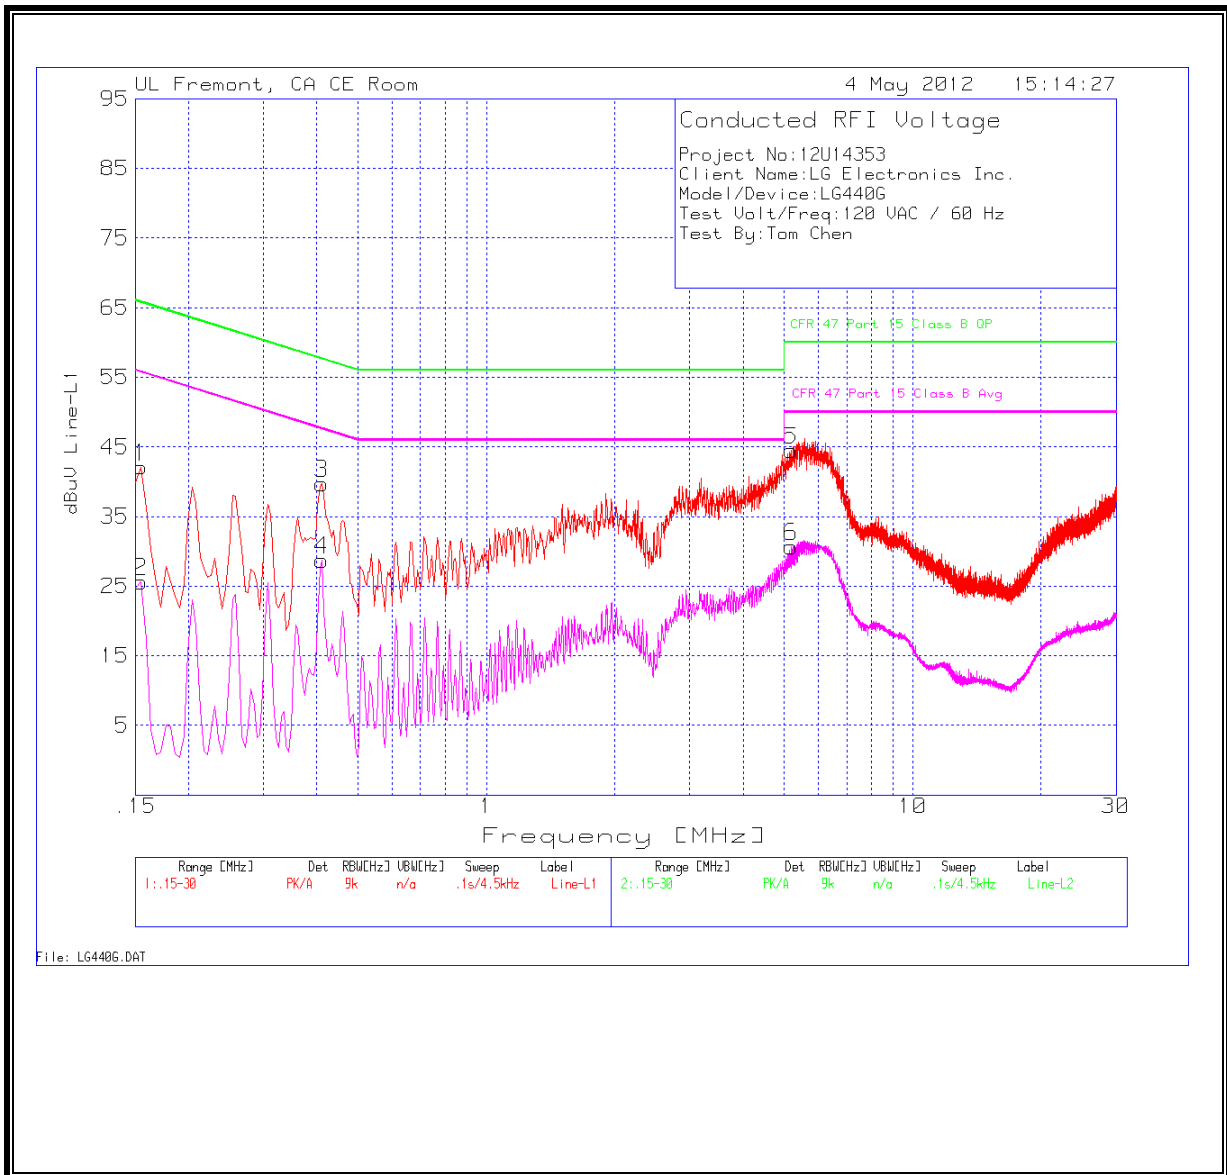

LINE 2 RESULTS

